FCC 47 CFR PART 27 SUBPART L

TEST REPORT

For

ActiveHome

Model No.: AH11-22-11

Trade Name: Upstreem S.A

Issued to

UPSTREEM S.A
Rue de Gosselies 13/9 Jumet 6040 Belgium

Issued by

Compliance Certification Services Inc.
Wugu Laboratory
No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City, Taiwan. (R.O.C.)
Issued Date: July 22, 2021

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Revision History

Rev.		Issue Date		Revisions	Effect Page	Revised By
00		July 22, 2021		Initial Issue	ALL	Doris Chu

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION 4
2. EUT DESCRIPTION 5
3. TEST METHODOLOGY 6
3.1 DESCRIPTION OF TEST TYPE 6
3.2 THE WORST MODE OF MEASUREMENT 7
4. TEST SUMMARY 8
5. INSTRUMENT CALIBRATION 9
5.1 MEASURING INSTRUMENT CALIBRATION 9
5.2 MEASUREMENT EQUIPMENT USED 9
5.3 MEASUREMENT UNCERTAINTY 11
6. FACILITIES AND ACCREDITATIONS 12
6.1 FACILITIES 12
6.2 EQUIPMENT 12
7. SETUP OF EQUIPMENT UNDER TEST 13
7.1 SETUP CONFIGURATION OF EUT 13
7.2 SUPPORT EQUIPMENT 13
8. TEST PROCEDURE AND RESULT 14
8.1 ERP & EIRP MEASUREMENT 14
8.2 FREQUENCY STABILITY MEASUREMENT 19
8.3 OCCUPIED BANDWIDTH MEASUREMENT 21
8.4 PEAK TO AVERAGE POWER RATIO 47
8.5 BAND EDGE MEASUREMENT 61
8.6 CONDUCTED SPURIOUS EMISSIONS 74
8.7 RADIATED EMISSION MEASUREMENT 99
APPENDIX A PHOTOGRAPHS OF TEST SETUP A-1

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

1. TEST RESULT CERTIFICATION

Applicant: UPSTREEM S.A
Rue de Gosselies 13/9 Jumet 6040 Belgium

Manufacturer: IMEC Taiwan Co.
4F. No.6-2, Dusing Rd., Hsinchu Science Park, Hsinchu, Taiwan

Equipment Under Test: ActiveHome

Trade Name: Upstreem S.A

Model No.: AH11-22-11

Date of Test: April 14 ~ 21, 2021

APPLICABLE STANDARDS	
Standard	**TEST RESULT**
FCC Part 27, Subpart C, L, FCC Part 2	No non-compliance noted
Statements of Conformity	
Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.	

The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Kevin Tsai
Deputy Manager
Compliance Certification Services Inc.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

2. EUT DESCRIPTION

Product	ActiveHome	
Model No.	AH11-22-11	
Model Discrepancy	N/A	
Trade	Upstreem S.A	
Received Date	March 8, 2021	
Power Supply	1. Power from Rechargeable Li-ion Polymer Battery. Rating: 3.7VDC, 650mAh 2. Power from Adapter. I/P: 100-230VAC, 50/60Hz, 0.2A O/P: 5.0VDC, 1.0A	
Modulation Technology	Cat-M1 Band 4	QPSK, 16QAM
Frequency Range	Cat-M1 Band 4 Channel Bandwidth: 1.4MHz	1710.7MHz ~1754.2MHz
	Cat-M1 Band 4 Channel Bandwidth: 3MHz	1711.5MHz ~ 1753.4MHz
	Cat-M1 Band 4 Channel Bandwidth: 5MHz	1712.5MHz ~1752.5MHz
	Cat-M1 Band 4 Channel Bandwidth: 10MHz	1715.0MHz ~1750.0MHz
	Cat-M1 Band 4 Channel Bandwidth: 15MHz	1717.5MHz ~ 1747.5MHz
	Cat-M1 Band 4 Channel Bandwidth: 20MHz	1720MHz ~1745MHz
Antenna Specification	Antenna type: FPC Antenna / Gain: 4.6 dBi	

Note:
1. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.
2. Disclaimer: Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

3. TEST METHODOLOGY

3.1 DESCRIPTION OF TEST TYPE

The EUT (model: AH11-22-11) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

LTE Band 4: 1710MHz ~ 1755MHz

Three channels had been tested for each channel bandwidth.

Channel Bandwidth	1.4MHz		3MHz		5MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
Low CH	19957	1710.7	19965	1711.5	19975	1712.5
Middle CH	20175	1732.5	20175	1732.5	20175	1732.5
High CH	20393	1754.3	20384	1753.4	20375	1752.5
Channel Bandwidth	**10MHz**		**15MHz**		**20MHz**	
	Channel	**Frequency (MHz)**	**Channel**	**Frequency (MHz)**	**Channel**	**Frequency (MHz)**
Low CH	20000	1715.0	20025	1717.5	20050	1720.00
Middle CH	20175	1732.5	20175	1732.5	20175	1732.50
High CH	20350	1750.0	20325	1747.5	20300	1745.00

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

3.2 THE WORST MODE OF MEASUREMENT

3.2.1 The worst mode of measurement

Radiated Emission Measurement Above 1G	
Test Condition	**Radiated Emission Above 1G**
Power supply Mode	**Mode 1: EUT power by Adapter** **Mode 2: EUT power by Battery**
Worst Mode	☒ **Mode 1** ☐ **Mode 2** ☐ **Mode 3** ☐ **Mode 4**
Worst Position	☒ **Placed in fixed position at X-Plane (E2-Plane)**

Radiated Emission Measurement Below 1G	
Test Condition	**Radiated Emission Below 1G**
Power supply Mode	**Mode 1: EUT power by Adapter** **Mode 2: EUT power by Battery**
Worst Mode	☒ **Mode 1** ☐ **Mode 2** ☐ **Mode 3** ☐ **Mode 4**

Remark:
1. The worst mode was record in this test report.
2. EUT pre-scanned in axis X and two polarity, for radiated measurement. The worst case(X-Plane) were recorded in this report

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

4. TEST SUMMARY

FCC Standard Section	Report Section	Test Item	Result
-	2	Antenna Requirement	Pass
27.50(d)	8.1	EIRP Measurement	Pass
2.1055, 27.54	8.2	Frequency Stability v.s. temperature measurement	Pass
2.1049	8.3	Occupied Bandwidth Measurement	Pass
27.50(d)	8.4	Peak to Average Ratio	Pass
27.53(h)	8.5	Conducted Band Edge	Pass
27.53(h)	8.6	Conducted Spurious Emission	Pass
27.53(h)	8.7	Spurious Radiation Measurement	Pass

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

5. INSTRUMENT CALIBRATION

5.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

5.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

3M 966 Chamber Test Site					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal Date**	**Cal Due**
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/08/2021	02/07/2022
Bilog Antenna	Sunol Sciences	JB3	A030105	07/24/2020	07/23/2021
Coaxial Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/24/2021	02/23/2022
Coaxial Cable	EMCI	EMC105	190914+327109/4	09/19/2020	09/18/2021
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/06/2021	01/05/2022
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	09/30/2020	09/29/2021
Loop Ant	COM-POWER	AL-130	121051	04/07/2021	04/06/2022
Pre-Amplifier	EMEC	EM330	060609	02/24/2021	02/23/2022
Pre-Amplifier	HP	8449B	3008A00965	12/25/2020	12/24/2021
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	07/24/2020	07/23/2021
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	e3 6.11-20180413				

3M 966 Chamber Test Site					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal Date**	**Cal Due**
Radio Communication Analyzer	Anritsu	MT-8820C	6201240043	07/17/2020	07/16/2021
Signal Analyzer	R&S	FSV 40	101073	09/17/2020	09/16/2021
Wideband Radio Communication Tester	R&S	CMW 500	116875	07/19/2020	07/18/2021
Software	e3 6.11-20180413				

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

RF Conducted Test Site					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal Date**	**Cal Due**
Coaxial Cable	Woken	WC12	CC001	06/29/2020	06/28/2021
Coaxial Cable	Woken	WC12	CC003	06/29/2020	06/28/2021
Power Divider	Solvang Technology	STI08-0015	008	08/05/2020	08/04/2021
Signal Analyzer	R&S	FSV 40	101561	08/17/2020	08/16/2021
Thermostatic/Humidity Chamber	GWINSTEK	GTC-288MH-CC	TH160402	05/07/2020	05/06/2021
Radio Communication Analyzer	Anritsu	MT-8821C	6201300618	05/27/2020	05/26/2021
Software	N/A				

Remark: Each piece of equipment is scheduled for calibration once a year.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

5.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 0.0014
RF output power, conducted	+/- 1.14
Power density, conducted	+/- 1.40
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

6. FACILITIES AND ACCREDITATIONS

6.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City, Taiwan. (R.O.C.)
Tel: 886-2-2299-9720 / Fax: 886-2-2299-9721:

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10: 2013 and CISPR Publication 22.

6.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, “Radio Interference Measuring Apparatus and Measurement Methods.”

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

7. SETUP OF EQUIPMENT UNDER TEST

7.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

7.2 SUPPORT EQUIPMENT

No	Equipment	Brand	Model	Series No.	FCC ID
1	DC Power Source	Agilent	E3640A	N/A	N/A

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

8. TEST PROCEDURE AND RESULT

8.1 EIRP MEASUREMENT

LIMIT

According to FCC §2.1046

FCC 27.50 (d) (4): Fixed, mobile, and portable (handheld)stations operating in the 1710-1755MHz band and mobile and portable stations operating in the 1695-1710MHz and 1755-1780MHz bands are limited to 1 watt EIRP.

TEST PROCEDURES

CONDUCTED POWER MEASUREMENT:

1. The transmitter output power was connected to the call box.
2. Set EUT at maximum output power via call box.
3. Set Call box at lowest, middle and highest channels for each band and modulation.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

TEST RESULTS

No non-compliance noted.

TEST RESULTS

Temperature:	22.4℃	**Humidity:**	52.1% RH
Tested by:	Dally Hong	**Test Date:**	April 15, 2021

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

LTE Band 4

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			EIRP Power(dBm)		
						19957	20175	20393	19957	20175	20393
						1710.7 MHz	1732.5 MHz	1754.3 MHz	1710.7 MHz	1732.5 MHz	1754.3 MHz
LTE Band 4	1.4	QPSK	1	0	0	22.15	22.12	22.02	**26.75**	26.72	26.62
			1	2	0	22.06	22.03	21.99	26.66	26.63	26.59
			1	5	0	21.93	21.79	21.78	26.53	26.39	26.38
			3	0	0	21.03	20.80	20.63	25.63	25.40	25.23
			3	2	0	20.91	20.77	20.61	25.51	25.37	25.21
			3	3	0	20.90	20.75	20.60	25.50	25.35	25.20
			6	0	0	19.93	19.96	19.86	24.53	24.56	24.46
		16QAM	1	0	0	21.00	21.03	20.87	25.60	25.63	25.47
			1	2	0	20.94	20.90	20.80	25.54	25.50	25.40
			1	5	0	20.80	20.76	20.84	25.40	25.36	25.44
			3	0	0	19.87	19.93	20.07	24.47	24.53	24.67
			3	2	0	19.59	19.78	19.35	24.19	24.38	23.95
			3	3	0	19.73	19.48	19.23	24.33	24.08	23.83
			5	0	0	20.06	19.93	19.78	24.66	24.53	24.38

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			EIRP Power(dBm)		
						19965	20175	20385	19965	20175	20385
						1711.5 MHz	1732.5 MHz	1753.5 MHz	1711.5 MHz	1732.5 MHz	1753.5 MHz
LTE Band 4	3	QPSK	1	0	0	21.88	21.76	21.96	26.48	26.36	**26.56**
			1	2	0	21.82	21.71	21.58	26.42	26.31	26.18
			1	5	0	21.58	21.55	21.33	26.18	26.15	25.93
			3	0	0	20.76	20.56	20.42	25.36	25.16	25.02
			3	2	0	20.74	20.54	20.38	25.34	25.14	24.98
			3	3	0	20.65	20.53	20.28	25.25	25.13	24.88
			6	0	0	19.78	19.66	19.74	24.38	24.26	24.34
		16QAM	1	0	0	20.78	20.79	20.76	25.38	25.39	25.36
			1	2	0	20.75	20.77	20.53	25.35	25.37	25.13
			1	5	0	20.60	20.62	20.31	25.20	25.22	24.91
			3	0	0	19.87	19.71	19.36	24.47	24.31	23.96
			3	2	0	19.75	19.68	19.33	24.35	24.28	23.93
			3	3	0	19.63	19.56	19.21	24.23	24.16	23.81
			5	0	0	19.79	19.67	19.46	24.39	24.27	24.06

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			EIRP Power(dBm)		
						19975	20175	20375	19975	20175	20375
						1712.5 MHz	1732.5 MHz	1752.5 MHz	1712.5 MHz	1732.5 MHz	1752.5 MHz
LTE Band 4	5	QPSK	1	0	0	21.66	21.78	21.61	26.26	26.38	26.21
			1	2	0	21.67	21.60	21.54	26.27	26.20	26.14
			1	5	0	21.43	21.44	21.30	26.03	26.04	25.90
			3	0	0	22.05	21.65	21.62	26.65	26.25	26.22
			3	2	0	21.71	21.62	21.59	26.31	26.22	26.19
			3	3	0	21.62	21.53	21.51	26.22	26.13	26.11
			6	0	0	20.71	20.81	20.71	25.31	25.41	25.31
		16QAM	1	0	0	22.41	21.89	21.85	**27.01**	26.49	26.45
			1	2	0	21.88	21.75	21.78	26.48	26.35	26.38
			1	5	0	21.61	21.56	21.59	26.21	26.16	26.19
			3	0	0	22.23	21.71	21.73	26.83	26.31	26.33
			3	2	0	22.19	21.65	21.61	26.79	26.25	26.21
			3	3	0	22.10	21.55	21.50	26.70	26.15	26.10
			5	0	0	20.76	20.72	20.69	25.36	25.32	25.29

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			EIRP Power(dBm)		
						20000	20175	20350	20000	20175	20350
						1715 MHz	1732.5 MHz	1750 MHz	1715 MHz	1732.5 MHz	1750 MHz
LTE Band 4	10	QPSK	1	0	0	21.67	21.83	21.56	26.27	26.43	26.16
			1	2	0	21.68	21.70	21.57	26.28	26.30	26.17
			1	5	0	21.49	21.50	21.44	26.09	26.10	26.04
			3	0	0	21.72	21.67	21.62	26.32	26.27	26.22
			3	2	0	21.80	21.63	21.58	26.40	26.23	26.18
			3	3	0	21.73	21.56	21.50	26.33	26.16	26.10
			6	0	0	20.74	20.62	20.97	25.34	25.22	25.57
		16QAM	1	0	0	21.88	21.97	21.79	26.48	**26.57**	26.39
			1	2	0	21.83	21.84	21.80	26.43	26.44	26.40
			1	5	0	21.65	21.66	21.61	26.25	26.26	26.21
			3	0	0	21.82	21.81	21.64	26.42	26.41	26.24
			3	2	0	21.82	21.73	21.63	26.42	26.33	26.23
			3	3	0	21.76	21.66	21.58	26.36	26.26	26.18
			5	0	0	21.78	21.75	21.64	26.38	26.35	26.24

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			EIRP Power(dBm)		
						20025	20175	20325	20025	20175	20325
						1717.5 MHz	1732.5 MHz	1747.5 MHz	1717.5 MHz	1732.5 MHz	1747.5 MHz
LTE Band 4	15	QPSK	1	0	0	21.75	21.80	21.78	26.35	26.40	26.38
			1	2	0	21.74	21.71	21.75	26.34	26.31	26.35
			1	5	0	21.52	21.41	21.52	26.12	26.01	26.12
			3	0	0	21.81	21.79	21.74	26.41	26.39	26.34
			3	2	0	21.76	21.73	21.68	26.36	26.33	26.28
			3	3	0	21.68	21.64	21.65	26.28	26.24	26.25
			6	0	0	21.81	21.79	21.71	26.41	26.39	26.31
		16QAM	1	0	0	22.01	21.93	22.19	26.61	26.53	26.79
			1	2	0	21.95	21.87	21.96	26.55	26.47	26.56
			1	5	0	21.77	21.67	21.75	26.37	26.27	26.35
			3	0	0	21.82	21.82	21.82	26.42	26.42	26.42
			3	2	0	21.77	21.77	21.85	26.37	26.37	26.45
			3	3	0	21.68	21.67	21.74	26.28	26.27	26.34
			5	0	0	21.77	21.78	21.87	26.37	26.38	26.47

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			EIRP Power(dBm)		
						20050	20175	20300	20050	20175	20300
						1720 MHz	1732.5 MHz	1745 MHz	1720 MHz	1732.5 MHz	1745 MHz
LTE Band 4	20	QPSK	1	0	0	21.75	21.68	21.71	26.35	26.28	26.31
			1	2	0	21.60	21.61	21.52	26.20	26.21	26.12
			1	5	0	21.44	21.45	21.48	26.04	26.05	26.08
			3	0	0	21.71	21.65	21.71	26.31	26.25	26.31
			3	2	0	21.68	21.63	21.68	26.28	26.23	26.28
			3	3	0	21.71	21.63	21.59	26.31	26.23	26.19
			6	0	0	21.73	21.66	21.63	26.33	26.26	26.23
		16QAM	1	0	0	21.95	21.98	21.96	26.55	**26.58**	26.56
			1	2	0	21.54	21.74	21.38	26.14	26.34	25.98
			1	5	0	21.51	21.62	21.17	26.11	26.22	25.77
			3	0	0	21.82	21.79	21.83	26.42	26.39	26.43
			3	2	0	21.82	21.77	21.79	26.42	26.37	26.39
			3	3	0	21.68	21.63	21.77	26.28	26.23	26.37
			5	0	0	21.71	21.73	21.72	26.31	26.33	26.32

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

8.2 FREQUENCY STABILITY MEASUREMENT

LIMIT

According to the FCC part 27.54 shall be tested the frequency stability. The rule is defined that" The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

TEST PROCEDURE

Use Anritsu 8821 with frequency Error measurement capability.
Temp = -20 to +50℃
Voltage= 85% to 115% of the nominal value for AC powered equipment.

NOTE: The frequency error was recorded frequency error from the communication simulator.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

TEST RESULTS

Temperature: 22.4℃ **Humidity:** 52.1% RH

Tested by: Dally Hong **Test Date:** April 15, 2021

LTE Band 4

FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT:

Band2_10M_QPSK_Full RB																									
Channel	18650	18900	19150	18650	18900	19150	18650	18900	19150	18650	18900	19150	18650	18900	19150	18650	18900	19150	18650	18900	19150	18650	18900	19150	
Freq. (MHz)	1855	1880	1905	1855	1880	1905	1855	1880	1905	1855	1880	1905	1855	1880	1905	1855	1880	1905	1855	1880	1905	1855	1880	1905	
Test Time	**0 Minutes**			**2 Minutes**			**5 Minutes**			**10 Minutes**			**0 Minutes**			**2 Minutes**			**5 Minutes**			**10 Minutes**			
Temp.	Deviation																								Limit
(℃)	(Hz)												(ppm)												
-20	9.2	8.6	6.9	7.1	11.5	7.3	9.4	4.4	6.7	10.7	6.9	8.8	0.005	0.005	0.004	0.004	0.007	0.004	0.005	0.003	0.004	0.006	0.004	0.005	0.1
-10	-5.2	8.9	6.3	12.5	7.7	-0.7	1.3	-6.2	5.7	9.1	6.7	11.0	-0.003	0.005	0.004	0.007	0.004	0.000	0.001	-0.004	0.003	0.005	0.004	0.006	0.1
0	-3.3	5.7	6.1	14.4	3.5	-2.7	8.5	6.4	-4.7	-13.2	-8.8	-8.3	-0.002	0.003	0.003	0.008	0.002	-0.002	0.005	0.004	-0.003	-0.008	-0.005	-0.005	0.1
10	3.3	1.4	-0.8	3.7	2.6	2.6	7.3	5.0	5.6	9.1	7.7	11.6	0.002	0.001	0.000	0.002	0.002	0.001	0.004	0.003	0.003	0.005	0.004	0.007	0.1
20	6.4	5.2	2.8	7.5	4.9	8.2	5.6	9.8	4.1	13.5	12.8	17.7	0.004	0.003	0.002	0.004	0.003	0.005	0.003	0.006	0.002	0.008	0.007	0.010	0.1
30	6.0	8.6	4.4	9.2	6.7	6.5	8.0	7.6	12.1	8.8	16.4	19.5	0.003	0.005	0.003	0.005	0.004	0.004	0.005	0.004	0.007	0.005	0.009	0.011	0.1
40	4.7	3.8	7.2	10.8	6.9	4.3	15.2	5.2	6.7	9.4	5.7	-4.2	0.003	0.002	0.004	0.006	0.004	0.002	0.009	0.003	0.004	0.005	0.003	-0.002	0.1
50	3.4	5.5	8.4	6.2	3.3	8.5	4.1	2.0	5.6	-4.9	-2.1	3.4	0.002	0.003	0.005	0.004	0.002	0.005	0.002	0.001	0.003	-0.003	-0.001	0.002	0.1

FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT:

Band2_10M_QPSK_Full RB																									
Channel	18650	18900	19150	18650	18900	19150	18650	18900	19150	18650	18900	19150	18650	18900	19150	18650	18900	19150	18650	18900	19150	18650	18900	19150	
Freq. (MHz)	1855	1880	1905	1855	1880	1905	1855	1880	1905	1855	1880	1905	1855	1880	1905	1855	1880	1905	1855	1880	1905	1855	1880	1905	
Test Time	**0 Minutes**			**2 Minutes**			**5 Minutes**			**10 Minutes**			**0 Minutes**			**2 Minutes**			**5 Minutes**			**10 Minutes**			
Voltage	Deviation																								Limit
[V]	(Hz)												(ppm)												
5.75	-3.1	0.3	5.2	2.7	6.6	-4.5	3.9	1.4	7.5	8.3	-3.4	5.9	-0.002	0.000	0.003	0.002	0.004	-0.003	0.002	0.001	0.004	0.005	-0.002	0.003	0.1
5	8.1	9.3	2.4	7.8	6.0	4.8	2.5	3.1	3.7	-4.8	5.5	6.4	0.005	0.005	0.001	0.005	0.003	0.003	0.001	0.002	0.002	-0.003	0.003	0.004	0.1
4.25	-6.4	7.3	5.8	14.3	12.8	8.8	7.4	5.5	8.1	6.0	8.6	3.9	-0.004	0.004	0.003	0.008	0.007	0.005	0.004	0.003	0.005	0.003	0.005	0.002	0.1

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

8.3 OCCUPIED BANDWIDTH MEASUREMENT

LIMITS

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

TEST PROCEDURES

KDB 971168 D01 Power Meas License Digital Systems – Section 4.2

1. The occupied bandwidth was measured with the spectrum analyzer at the lowest, middle and highest channels in each band and different modulation. The 99% and -26dB bandwidth was measured and recorded.
2. RBW = 1-5% of the expected OBW
3. VBW ≥ 3 x RBW
4. Detector = Peak
5. Trace mode = max. hold

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

TEST RESULTS

Temperature: 23.1℃ **Humidity:** 52.5% RH
Tested by: Dally Hong **Test Date:** April 14, 2021

Frequency (MHz)	Channel	99%BW(MHz)		26dB BW(MHz)	
		QPSK	16QAM	QPSK	16QAM
Band 4 Channel Bandwidth 1.4MHz					
1710.7	19957	1.1027	0.9334	1.3242	1.1418
1732.5	20175	1.1027	0.9334	1.3155	1.1288
1754.3	20393	1.1027	0.9378	1.3285	1.1331
Band 4 Channel Bandwidth 3MHz					
1711.5	19965	1.1027	0.9291	1.3068	1.1331
1732.5	20175	1.1027	0.9291	1.3150	1.1196
1753.5	20385	1.0984	0.9334	1.3072	1.1205
Band 4 Channel Bandwidth 5MHz					
1712.5	19975	1.0941	0.9334	1.2200	1.1635
1732.5	20175	1.0984	0.9334	1.3285	1.1852
1752.5	20375	1.0984	0.9334	1.3202	1.1639
Band 4 Channel Bandwidth 10MHz					
1715	20000	1.0941	0.9465	1.3068	1.3589
1732.5	20175	1.0941	0.9378	1.3068	1.2764
1750	20350	1.0941	0.9421	1.3068	1.3198
Band 4 Channel Bandwidth 15MHz					
1717.5	20025	1.1071	0.9378	1.3459	1.4327
1732.5	20175	1.1071	0.9378	1.3415	1.4284
1747.5	20325	1.1071	0.9334	1.3459	1.1505
Band 4 Channel Bandwidth 20MHz					
1720	20050	1.0984	0.9421	1.3329	1.3502
1732.5	20175	1.0984	0.9465	1.3415	1.3589
1745	20300	1.0984	0.9421	1.3285	1.2938

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

LTE Band 4

26dB & OBW (99%) / QPSK

BW: 1.4MHz

CH Low

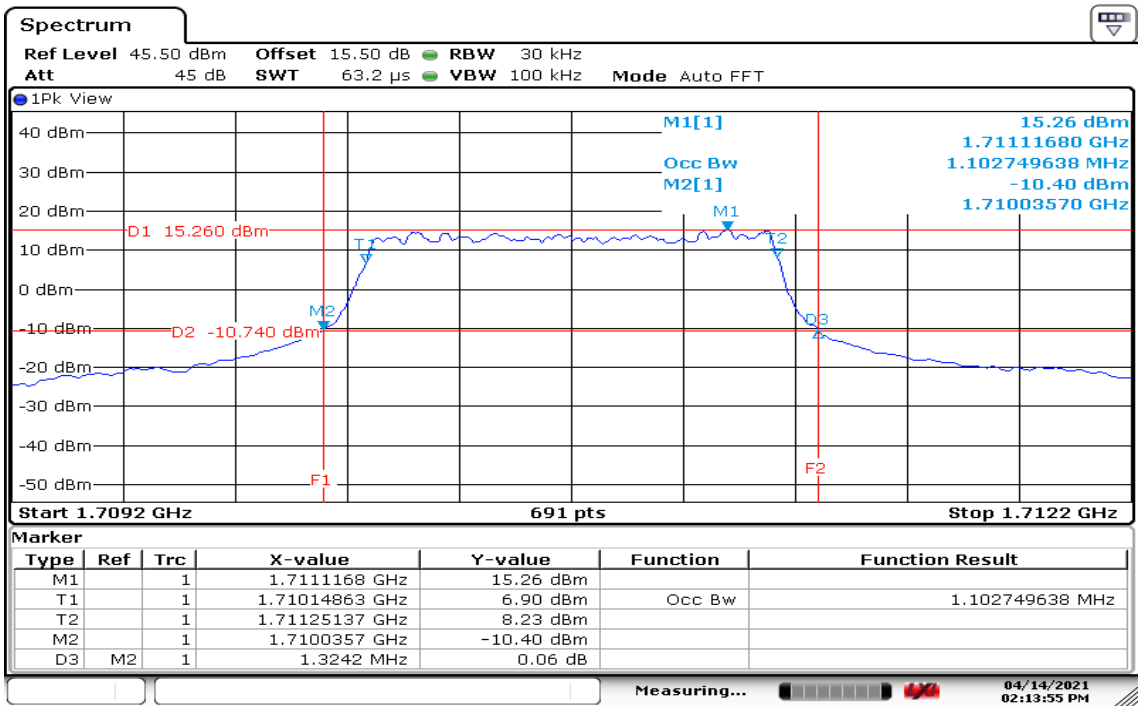

Marker						
Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.7111168 GHz	15.26 dBm		
T1		1	1.71014863 GHz	6.90 dBm	Occ Bw	1.102749638 MHz
T2		1	1.71125137 GHz	8.23 dBm		
M2		1	1.7100357 GHz	-10.40 dBm		
D3	M2	1	1.3242 MHz	0.06 dB		

Date: 14.APR.2021 14:13:55

CH Mid

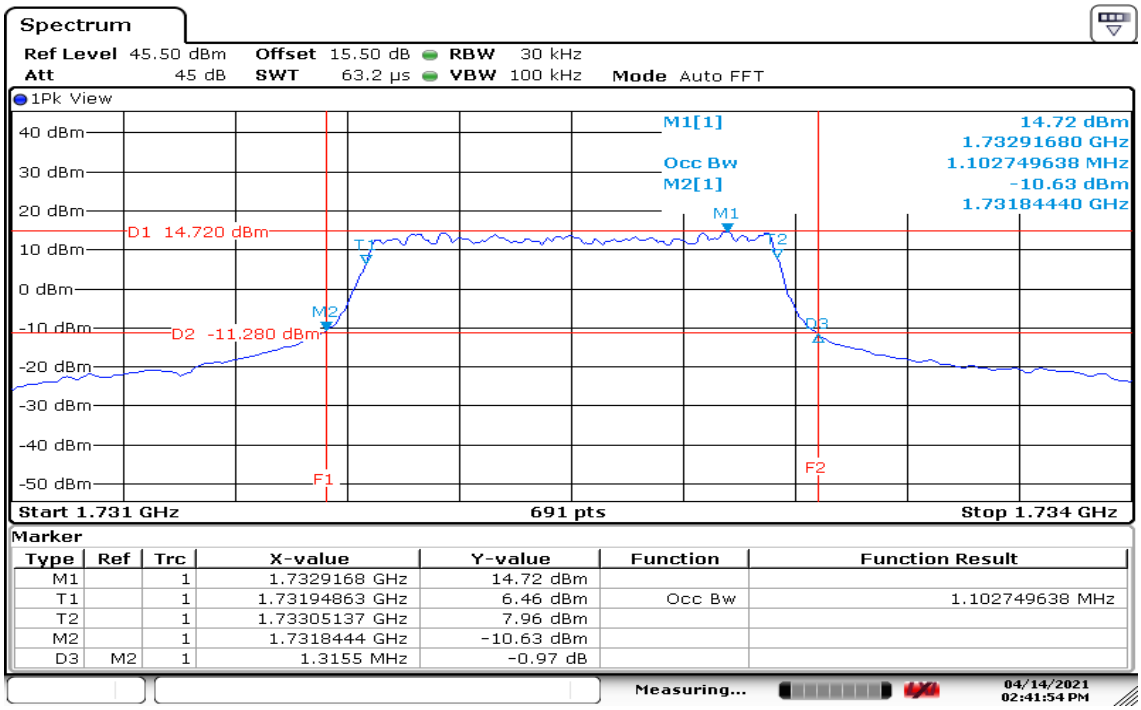

Marker						
Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.7329168 GHz	14.72 dBm		
T1		1	1.73194863 GHz	6.46 dBm	Occ Bw	1.102749638 MHz
T2		1	1.73305137 GHz	7.96 dBm		
M2		1	1.7318444 GHz	-10.63 dBm		
D3	M2	1	1.3155 MHz	-0.97 dB		

Date: 14.APR.2021 14:41:54

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

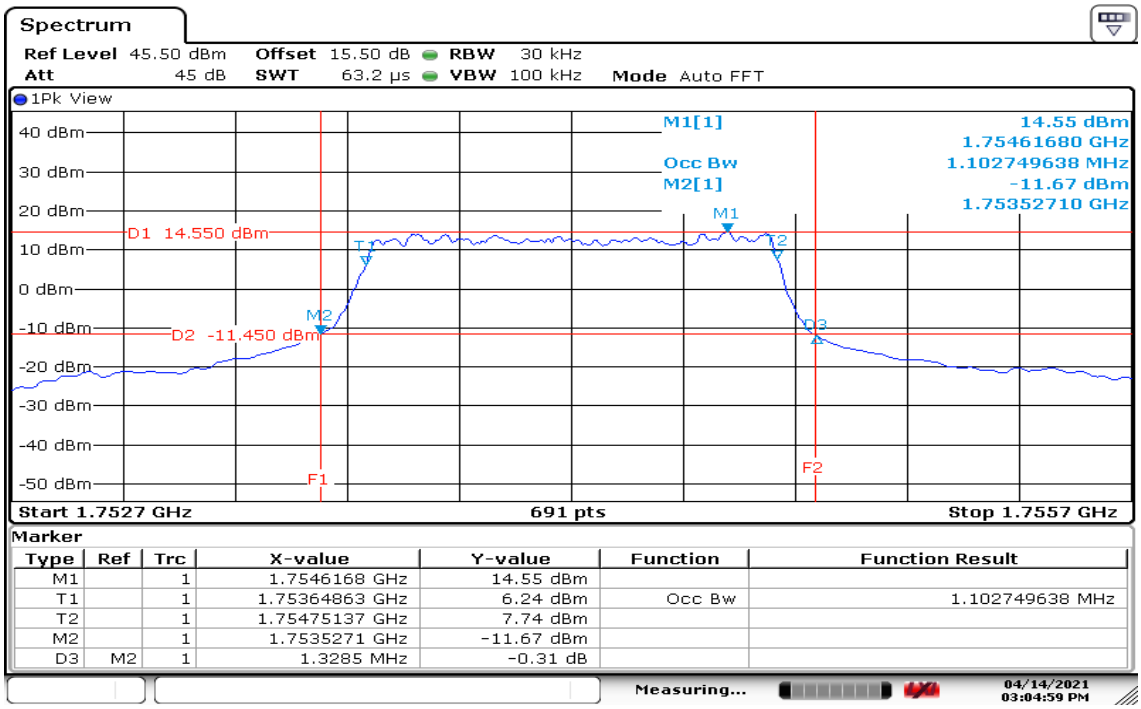

Date: 14.APR.2021 15:04:59

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

BW: 3MHz

CH Low

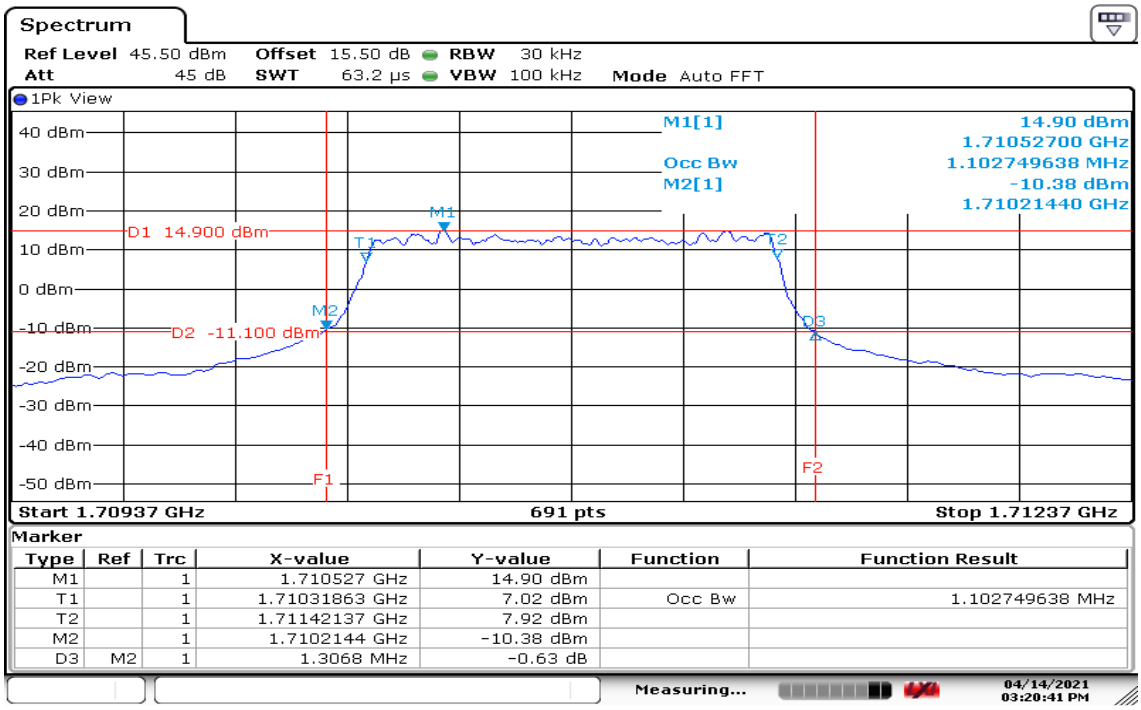

Marker						
Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.710527 GHz	14.90 dBm		
T1		1	1.71031863 GHz	7.02 dBm	Occ Bw	1.102749638 MHz
T2		1	1.71142137 GHz	7.92 dBm		
M2		1	1.7102144 GHz	-10.38 dBm		
D3	M2	1	1.3068 MHz	-0.63 dB		

Date: 14.APR.2021 15:20:42

CH Mid

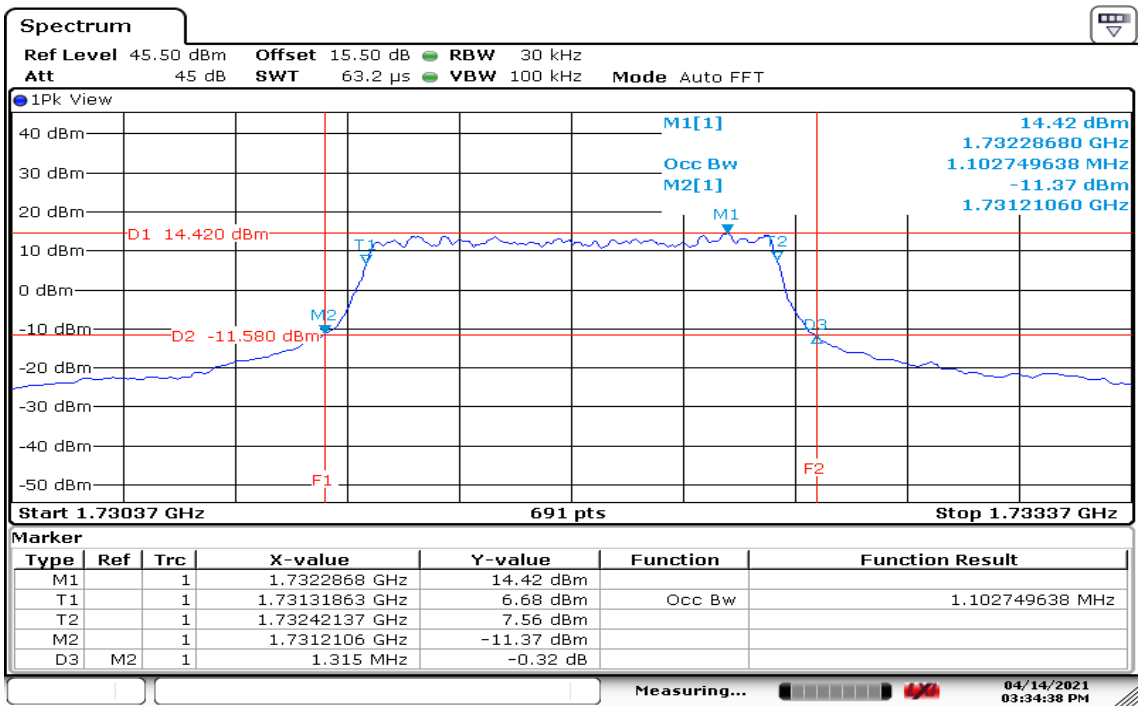

Marker						
Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.7322868 GHz	14.42 dBm		
T1		1	1.73131863 GHz	6.68 dBm	Occ Bw	1.102749638 MHz
T2		1	1.73242137 GHz	7.56 dBm		
M2		1	1.7312106 GHz	-11.37 dBm		
D3	M2	1	1.315 MHz	-0.32 dB		

Date: 14.APR.2021 15:34:38

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

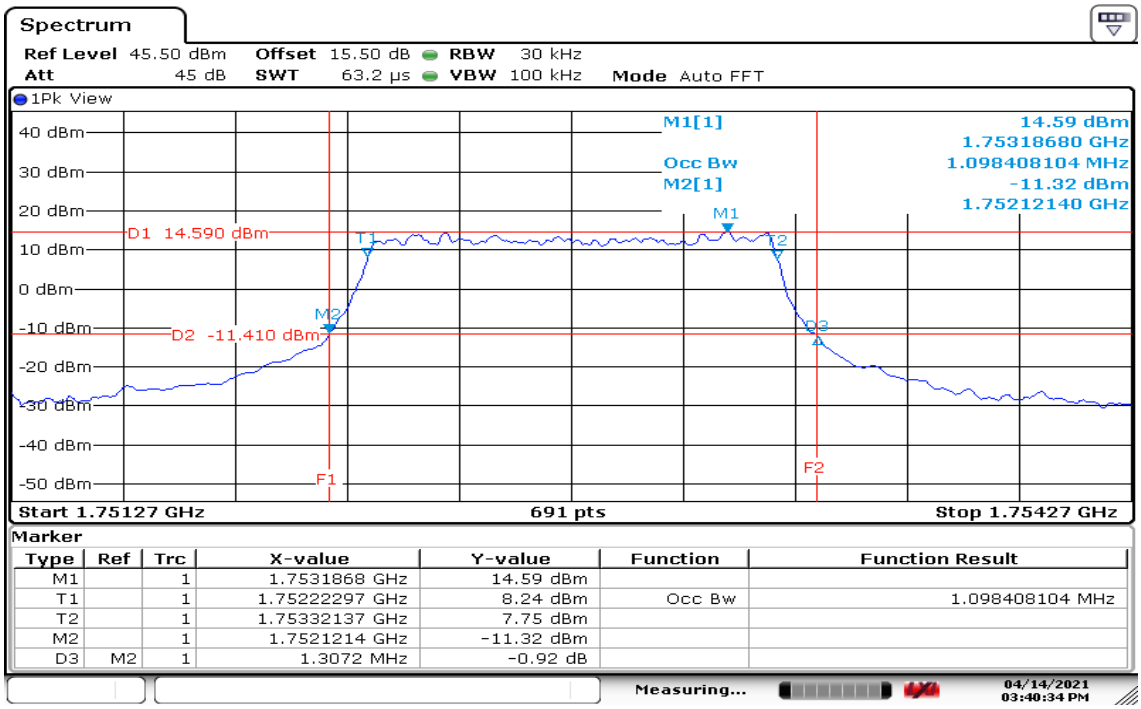

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.7531868 GHz	14.59 dBm		
T1		1	1.75222297 GHz	8.24 dBm	Occ Bw	1.098408104 MHz
T2		1	1.75332137 GHz	7.75 dBm		
M2		1	1.7521214 GHz	-11.32 dBm		
D3	M2	1	1.3072 MHz	-0.92 dB		

Measuring... 04/14/2021 03:40:34 PM

Date: 14.APR.2021 15:40:34

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

BW: 5MHz

CH Low

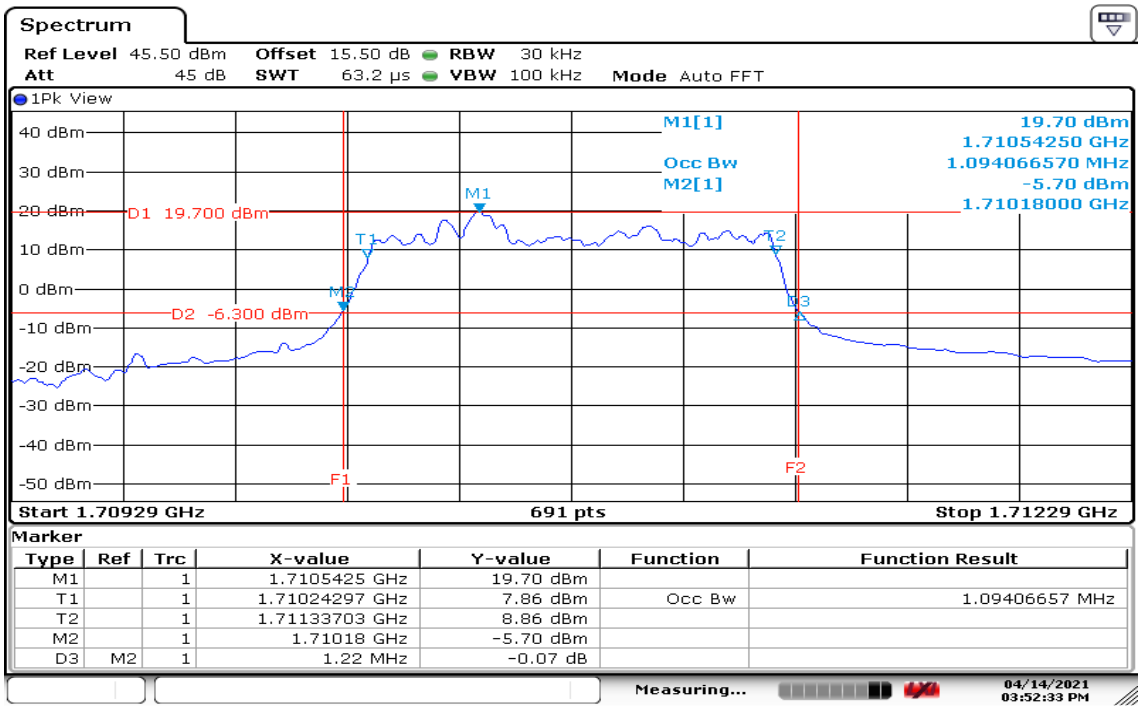

Date: 14.APR.2021 15:52:33

CH Mid

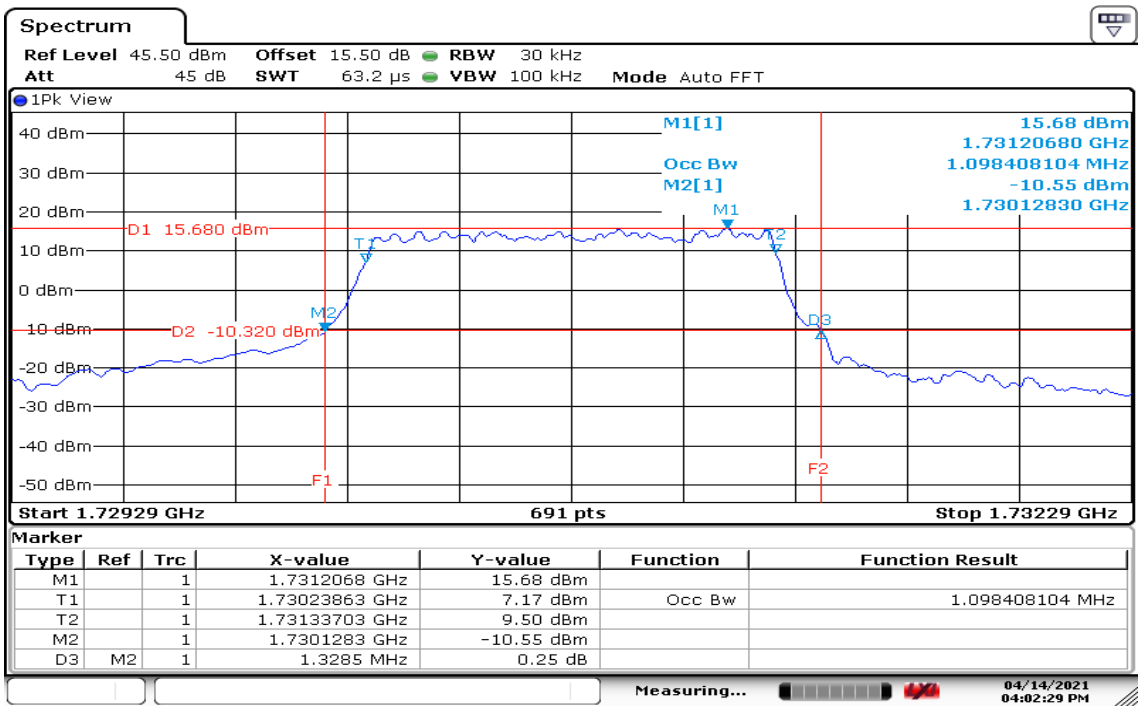

Date: 14.APR.2021 16:02:29

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

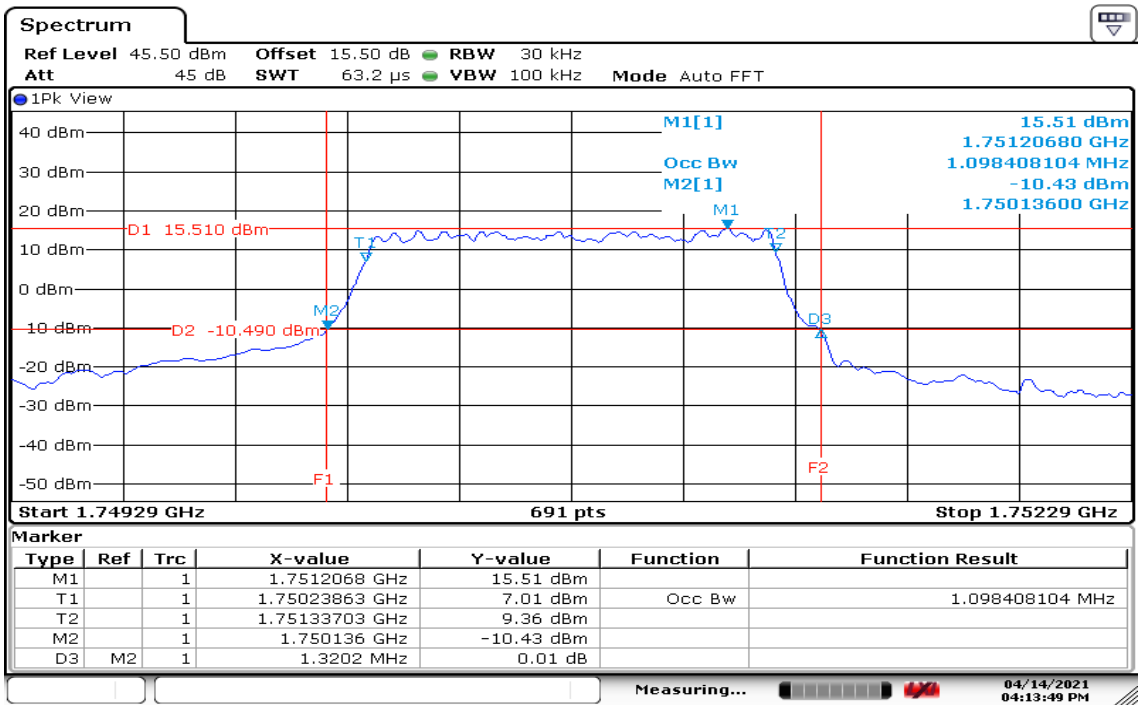

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.7512068 GHz	15.51 dBm		
T1		1	1.75023863 GHz	7.01 dBm	Occ Bw	1.098408104 MHz
T2		1	1.75133703 GHz	9.36 dBm		
M2		1	1.750136 GHz	-10.43 dBm		
D3	M2	1	1.3202 MHz	0.01 dB		

Measuring... 04/14/2021 04:13:49 PM

Date: 14.APR.2021 16:13:49

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

BW: 10MHz

CH Low

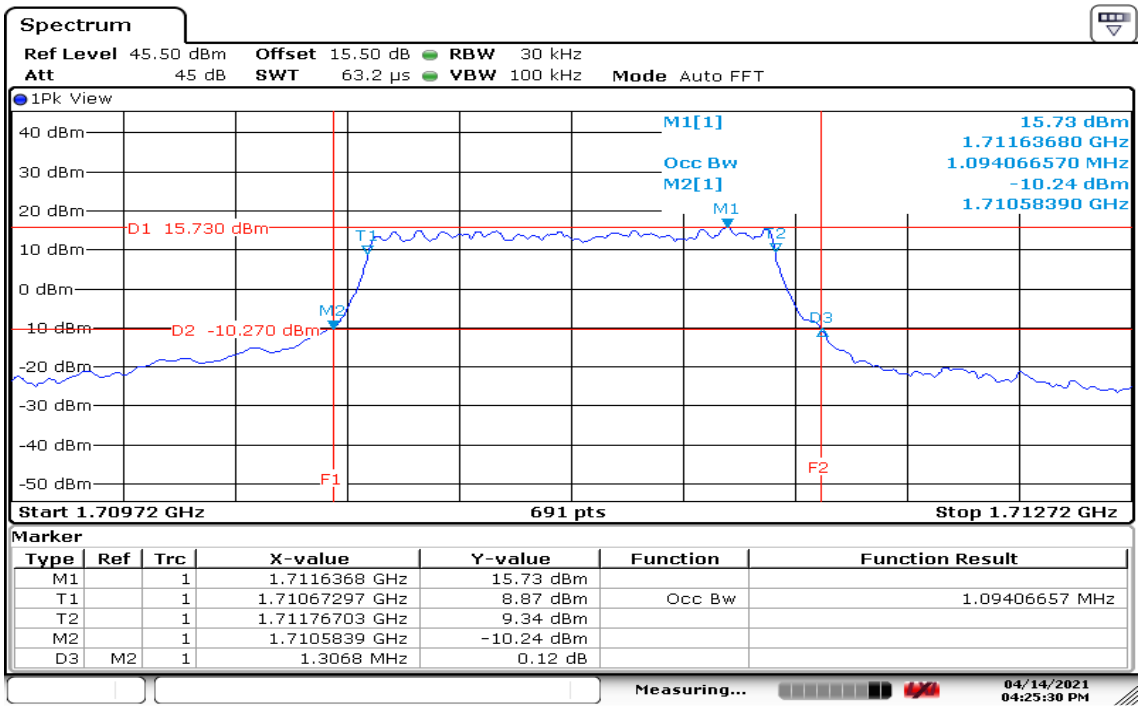

Date: 14.APR.2021 16:25:30

CH Mid

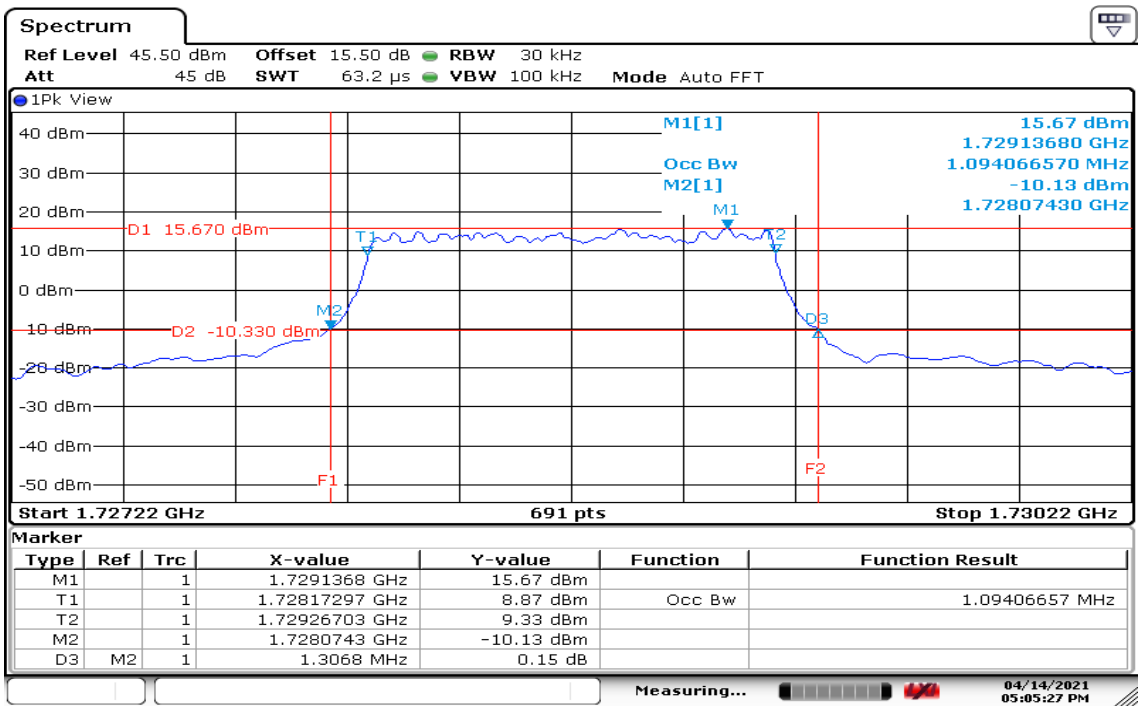

Date: 14.APR.2021 17:05:27

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

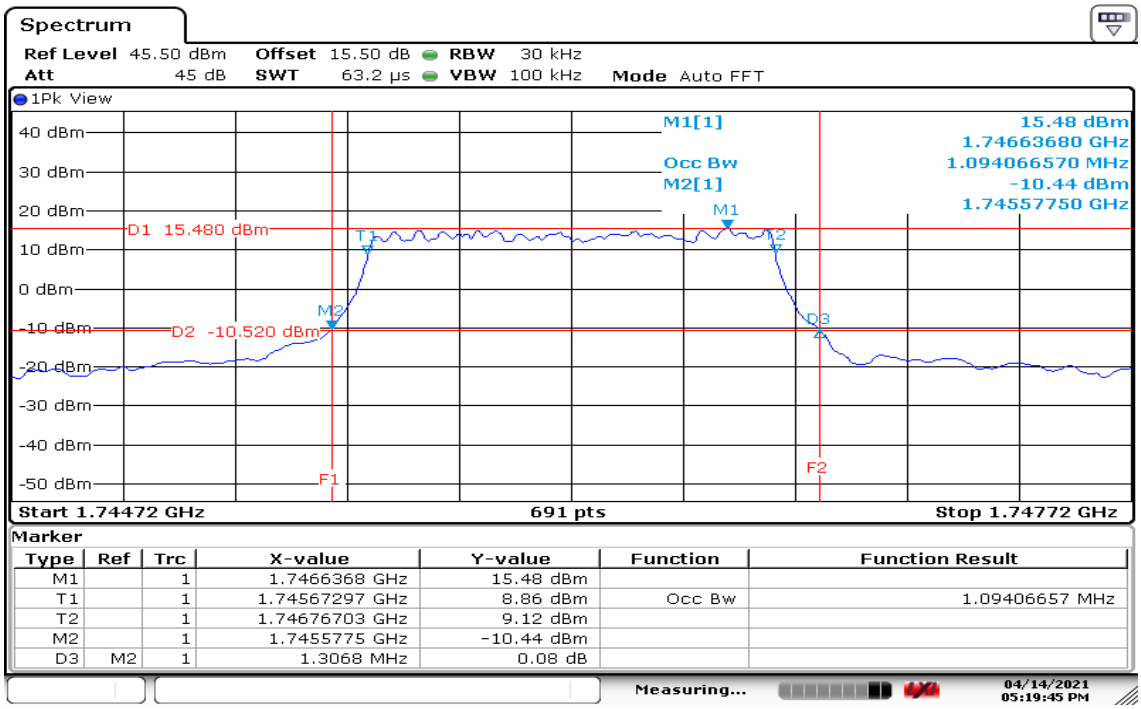

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.7466368 GHz	15.48 dBm		
T1		1	1.74567297 GHz	8.86 dBm	Occ Bw	1.09406657 MHz
T2		1	1.74676703 GHz	9.12 dBm		
M2		1	1.7455775 GHz	-10.44 dBm		
D3	M2	1	1.3068 MHz	0.08 dB		

Measuring... 04/14/2021 05:19:45 PM

Date: 14.APR.2021 17:19:45

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

BW: 15MHz

CH Low

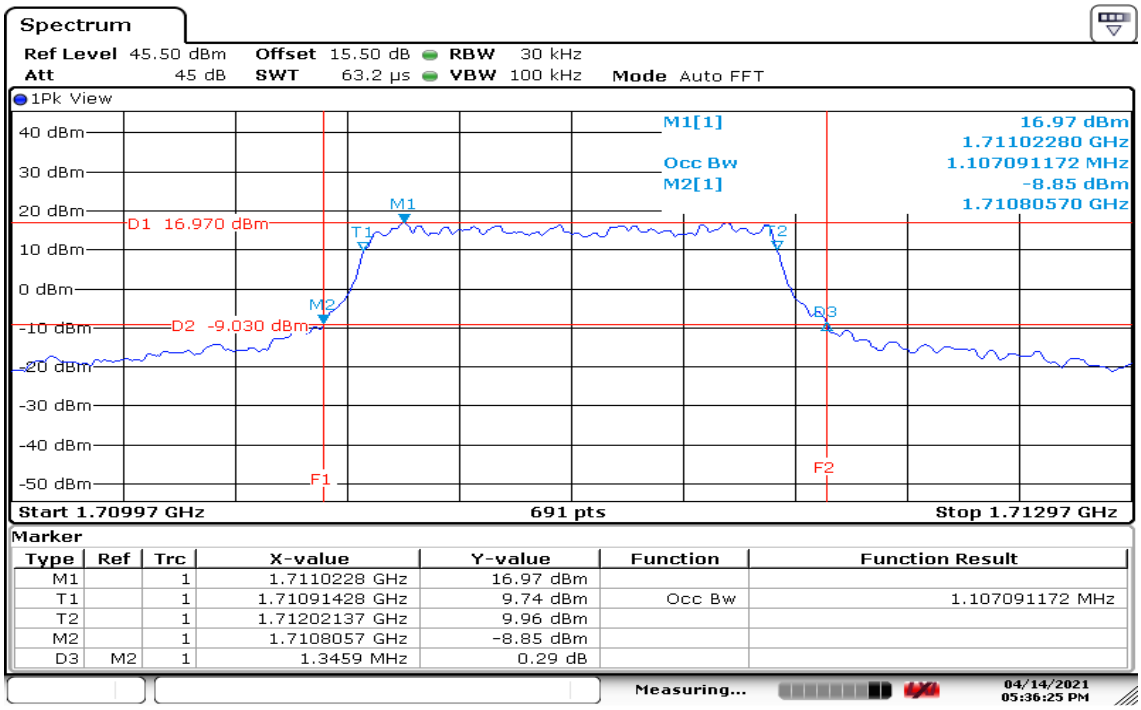

Date: 14.APR.2021 17:36:25

CH Mid

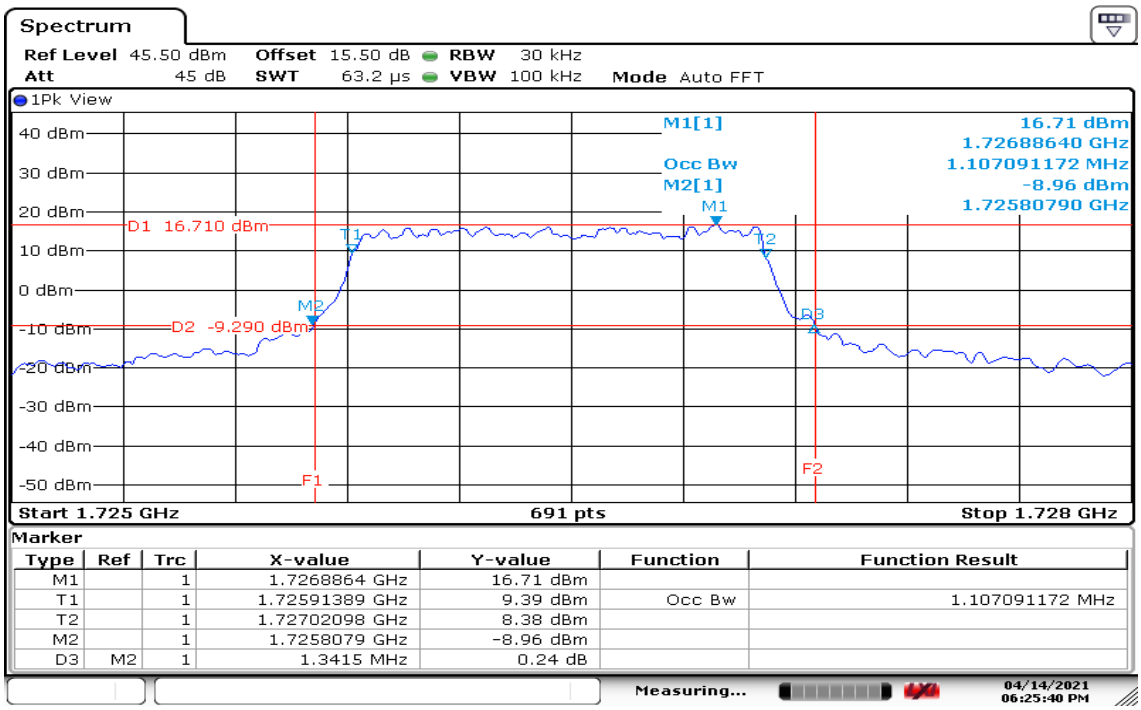

Date: 14.APR.2021 18:25:41

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

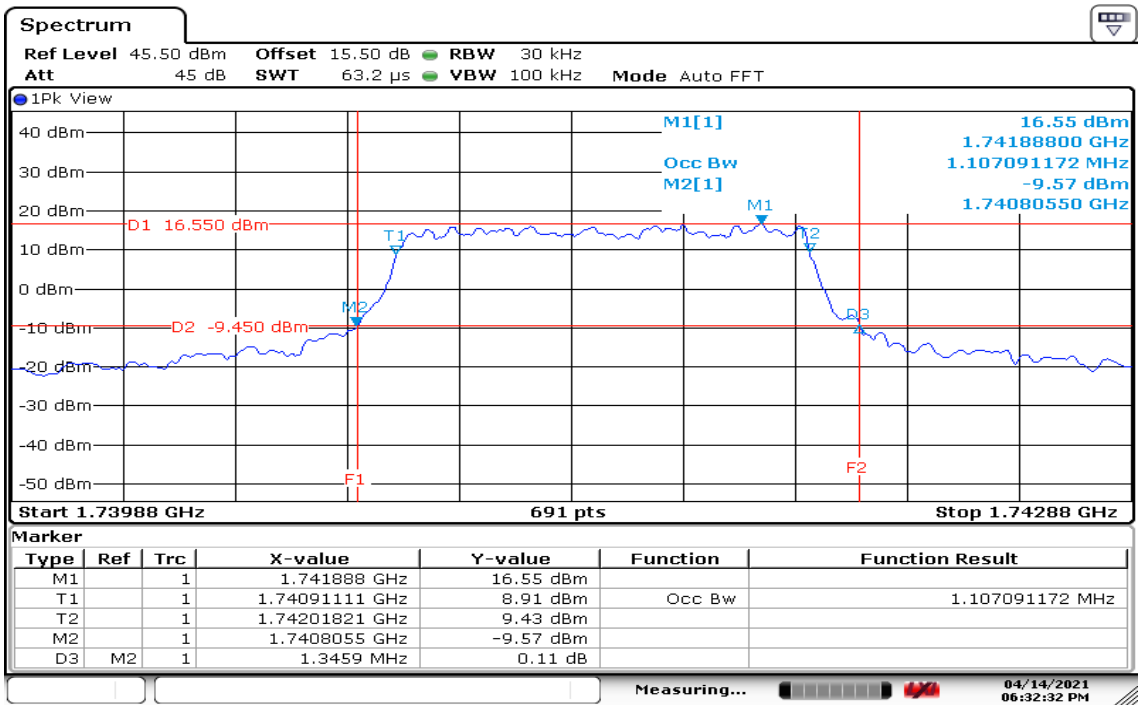

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.741888 GHz	16.55 dBm		
T1		1	1.74091111 GHz	8.91 dBm	Occ Bw	1.107091172 MHz
T2		1	1.74201821 GHz	9.43 dBm		
M2		1	1.7408055 GHz	-9.57 dBm		
D3	M2	1	1.3459 MHz	0.11 dB		

Date: 14.APR.2021 18:32:33

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

BW: 20MHz

CH Low

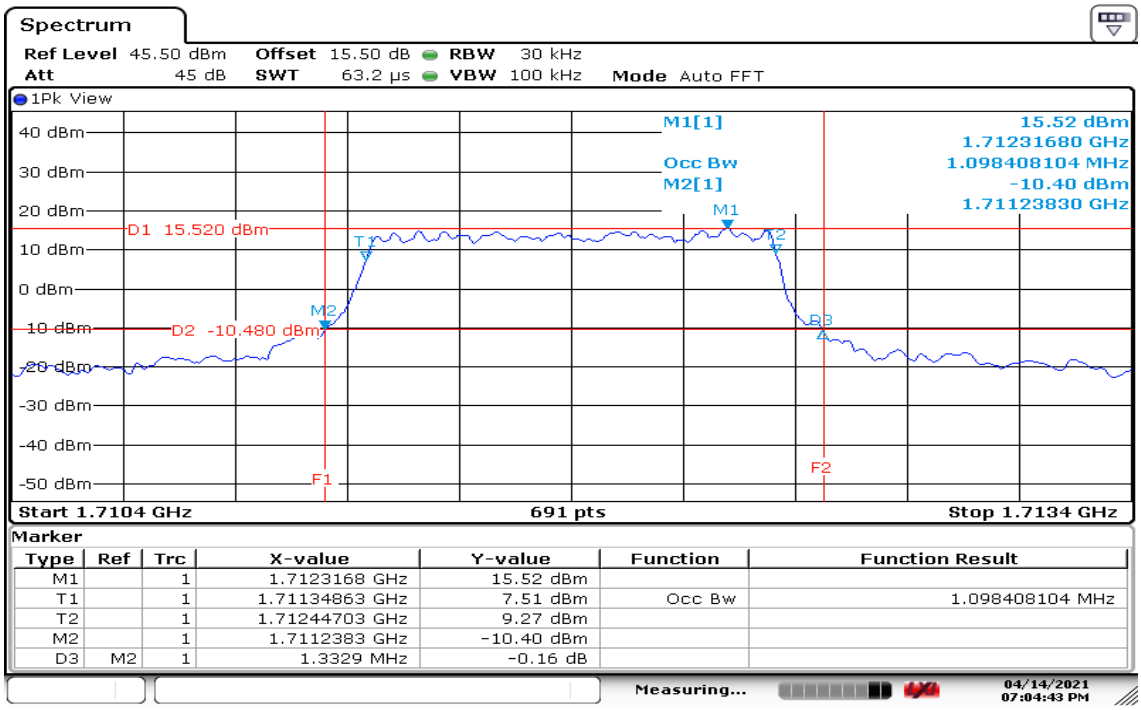

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.7123168 GHz	15.52 dBm		
T1		1	1.71134863 GHz	7.51 dBm	Occ Bw	1.098408104 MHz
T2		1	1.71244703 GHz	9.27 dBm		
M2		1	1.7112383 GHz	-10.40 dBm		
D3	M2	1	1.3329 MHz	-0.16 dB		

Measuring... 04/14/2021 07:04:43 PM

Date: 14.APR.2021 19:04:44

CH Mid

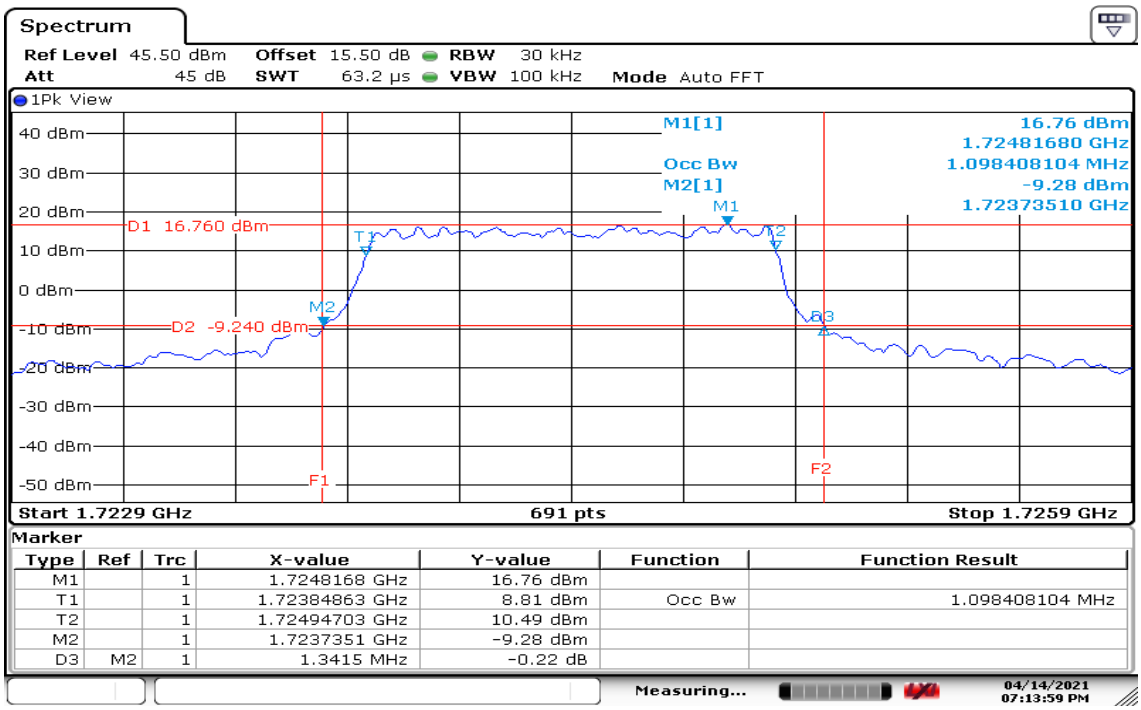

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.7248168 GHz	16.76 dBm		
T1		1	1.72384863 GHz	8.81 dBm	Occ Bw	1.098408104 MHz
T2		1	1.72494703 GHz	10.49 dBm		
M2		1	1.7237351 GHz	-9.28 dBm		
D3	M2	1	1.3415 MHz	-0.22 dB		

Measuring... 04/14/2021 07:13:59 PM

Date: 14.APR.2021 19:13:59

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

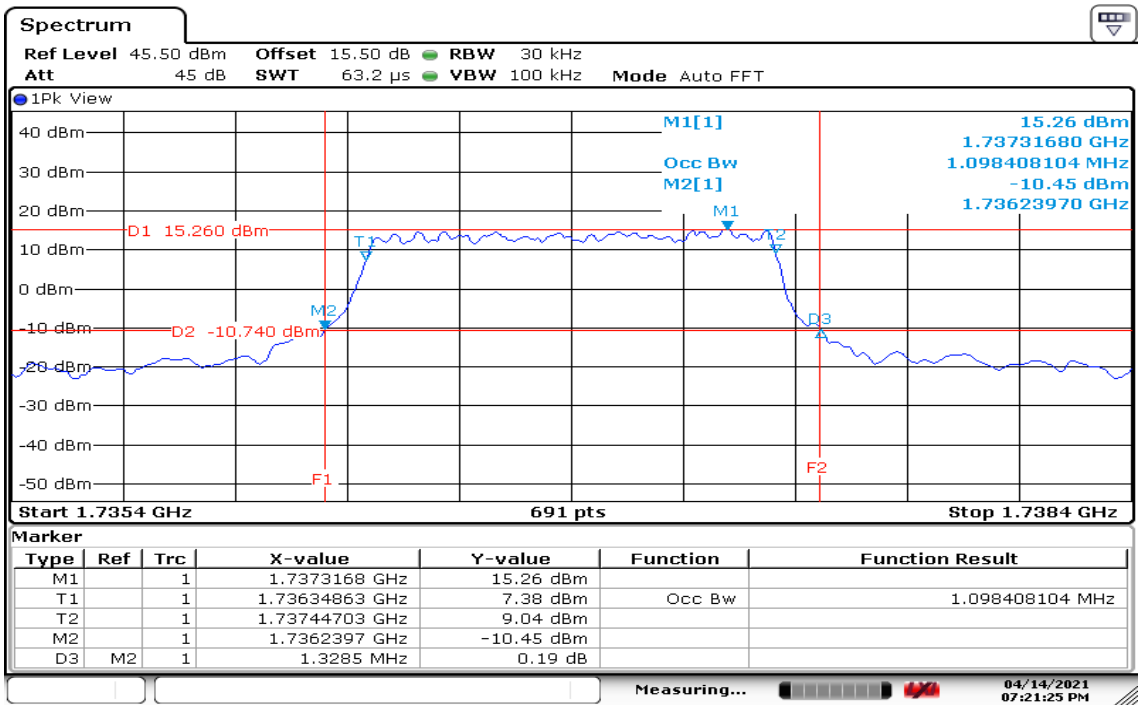

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.7373168 GHz	15.26 dBm		
T1		1	1.73634863 GHz	7.38 dBm	Occ Bw	1.098408104 MHz
T2		1	1.73744703 GHz	9.04 dBm		
M2		1	1.7362397 GHz	-10.45 dBm		
D3	M2	1	1.3285 MHz	0.19 dB		

Measuring... 04/14/2021 07:21:25 PM

Date: 14.APR.2021 19:21:25

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

26dB & OBW (99%) / 16QAM

BW: 1.4MHz

CH Low

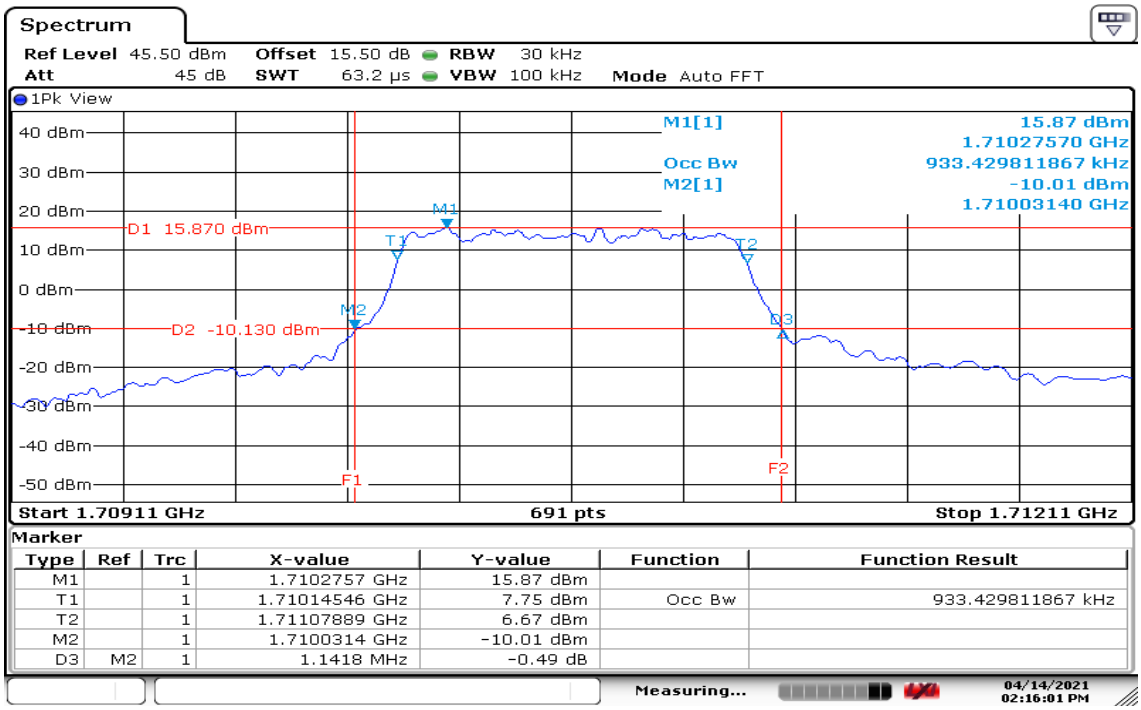

Marker						
Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.7102757 GHz	15.87 dBm		
T1		1	1.71014546 GHz	7.75 dBm	Occ Bw	933.429811867 kHz
T2		1	1.71107889 GHz	6.67 dBm		
M2		1	1.7100314 GHz	-10.01 dBm		
D3	M2	1	1.1418 MHz	-0.49 dB		

Date: 14.APR.2021 14:16:01

CH Mid

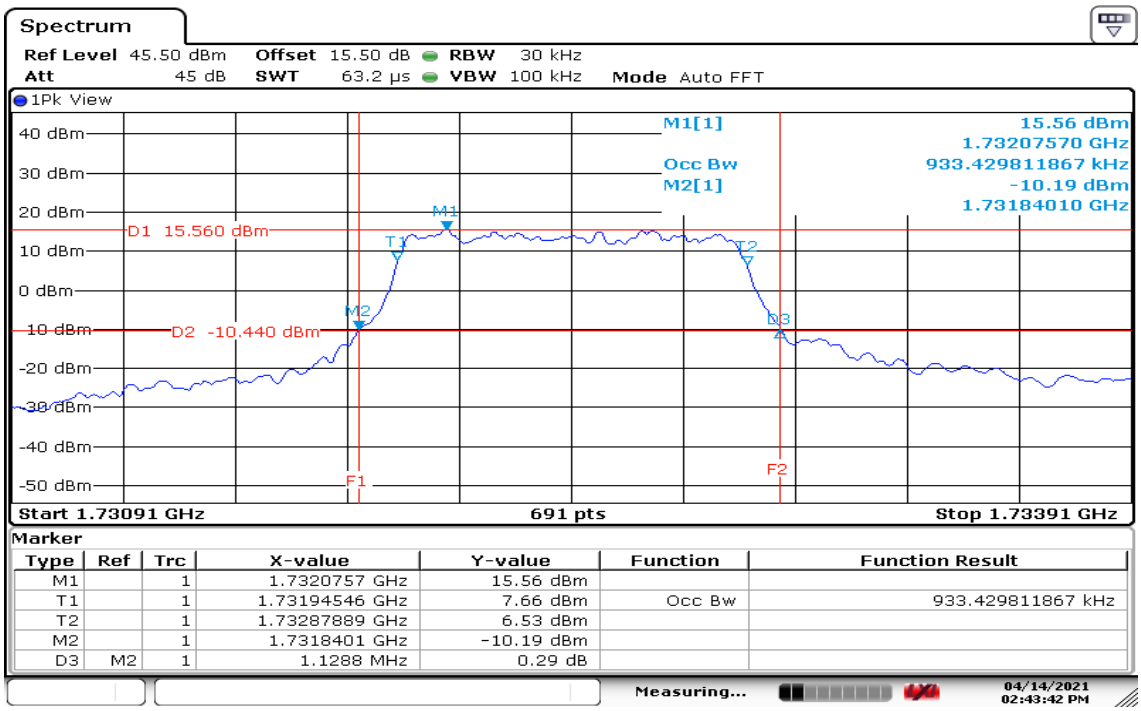

Marker						
Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.7320757 GHz	15.56 dBm		
T1		1	1.73194546 GHz	7.66 dBm	Occ Bw	933.429811867 kHz
T2		1	1.73287889 GHz	6.53 dBm		
M2		1	1.7318401 GHz	-10.19 dBm		
D3	M2	1	1.1288 MHz	0.29 dB		

Date: 14.APR.2021 14:43:41

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

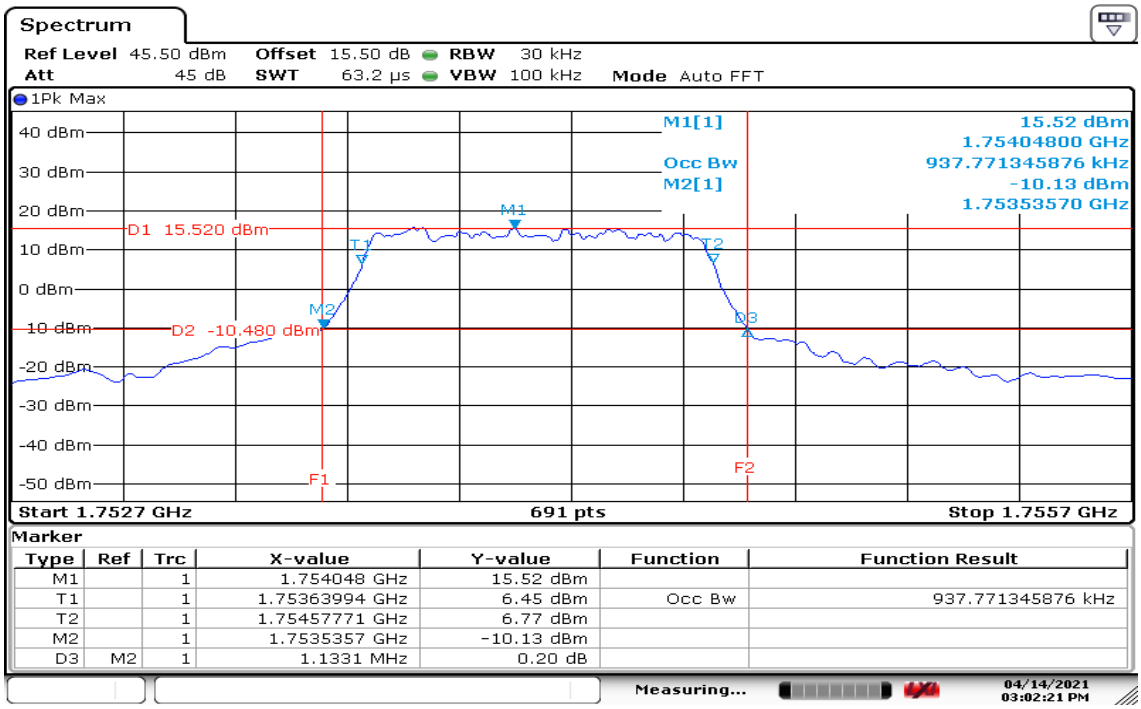

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.754048 GHz	15.52 dBm		
T1		1	1.75363994 GHz	6.45 dBm	Occ Bw	937.771345876 kHz
T2		1	1.75457771 GHz	6.77 dBm		
M2		1	1.7535357 GHz	-10.13 dBm		
D3	M2	1	1.1331 MHz	0.20 dB		

Measuring... 04/14/2021 03:02:21 PM

Date: 14.APR.2021 15:02:21

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

BW: 3MHz

CH Low

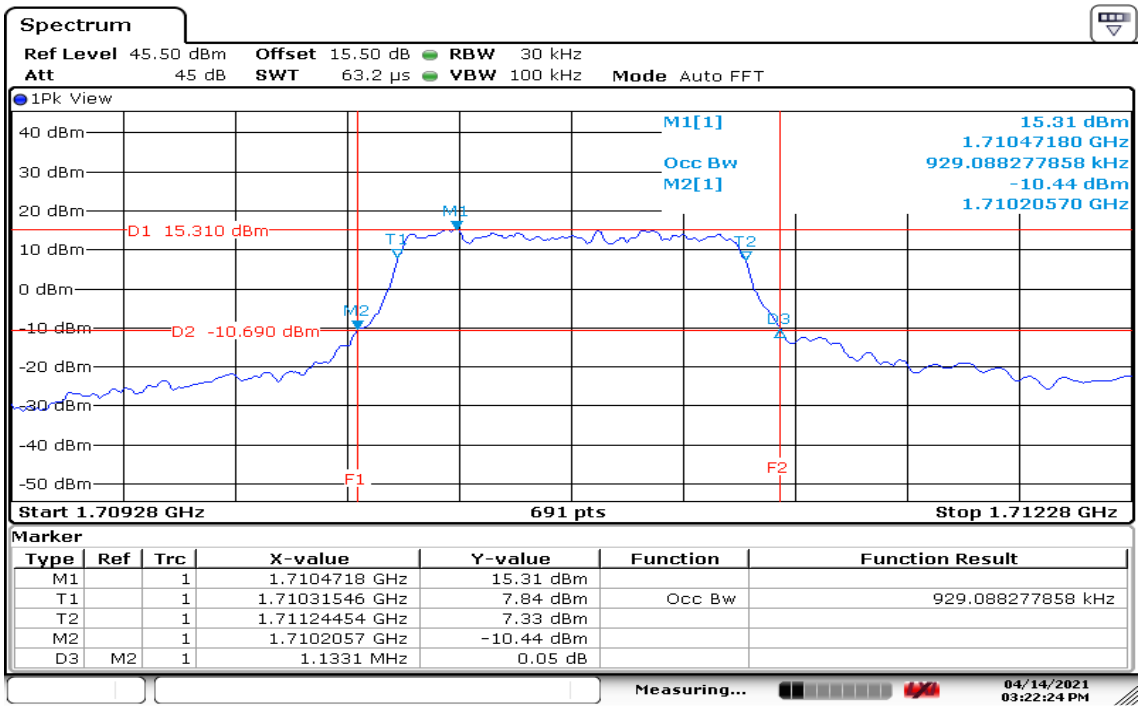

Date: 14.APR.2021 15:22:23

CH Mid

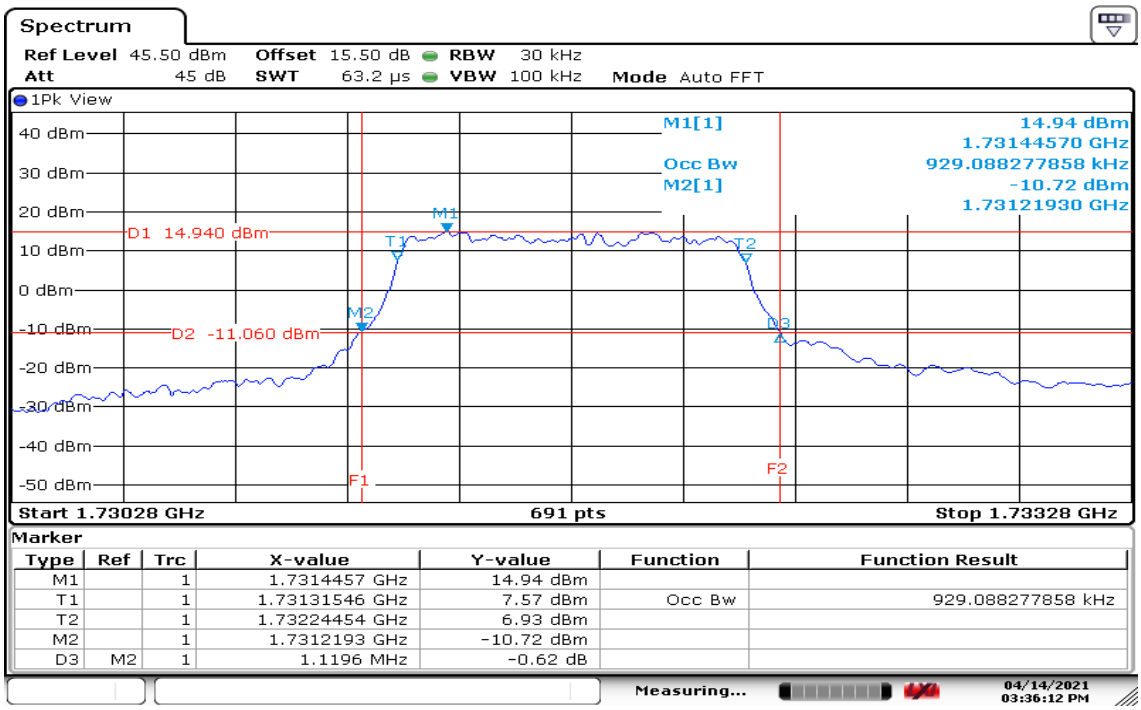

Date: 14.APR.2021 15:36:13

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

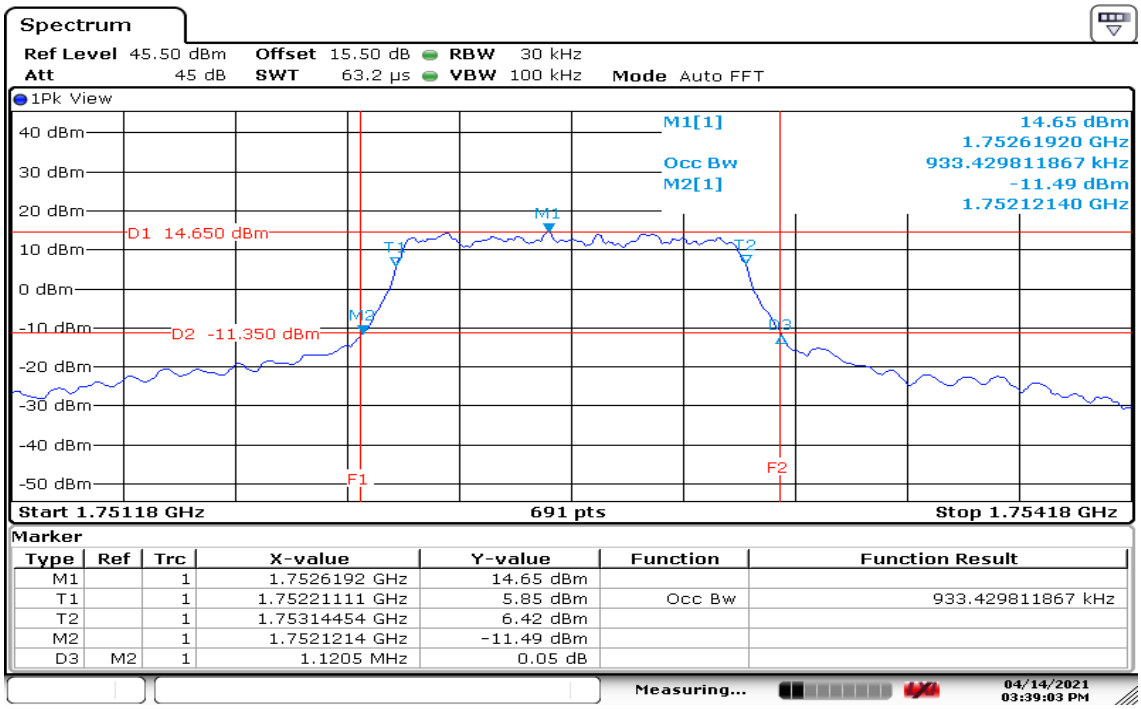

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.7526192 GHz	14.65 dBm		
T1		1	1.75221111 GHz	5.85 dBm	Occ Bw	933.429811867 kHz
T2		1	1.75314454 GHz	6.42 dBm		
M2		1	1.7521214 GHz	-11.49 dBm		
D3	M2	1	1.1205 MHz	0.05 dB		

Date: 14.APR.2021 15:39:04

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

BW: 5MHz

CH Low

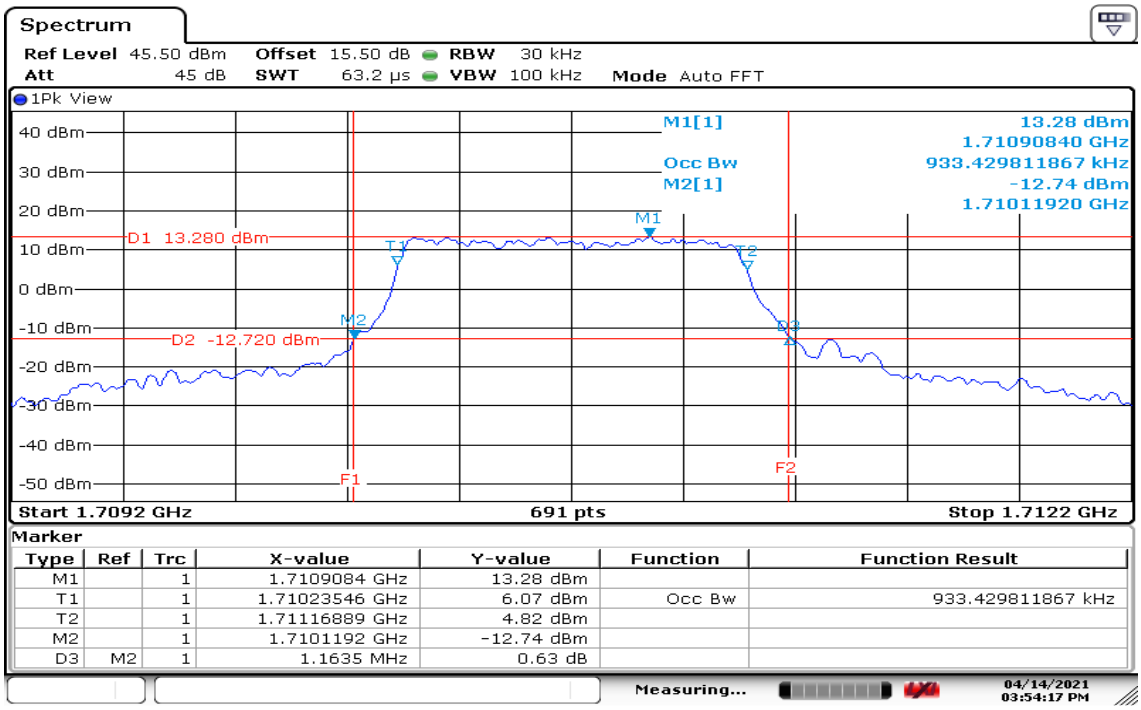

Marker						
Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.7109084 GHz	13.28 dBm		
T1		1	1.71023546 GHz	6.07 dBm	Occ Bw	933.429811867 kHz
T2		1	1.71116889 GHz	4.82 dBm		
M2		1	1.7101192 GHz	-12.74 dBm		
D3	M2	1	1.1635 MHz	0.63 dB		

Date: 14.APR.2021 15:54:18

CH Mid

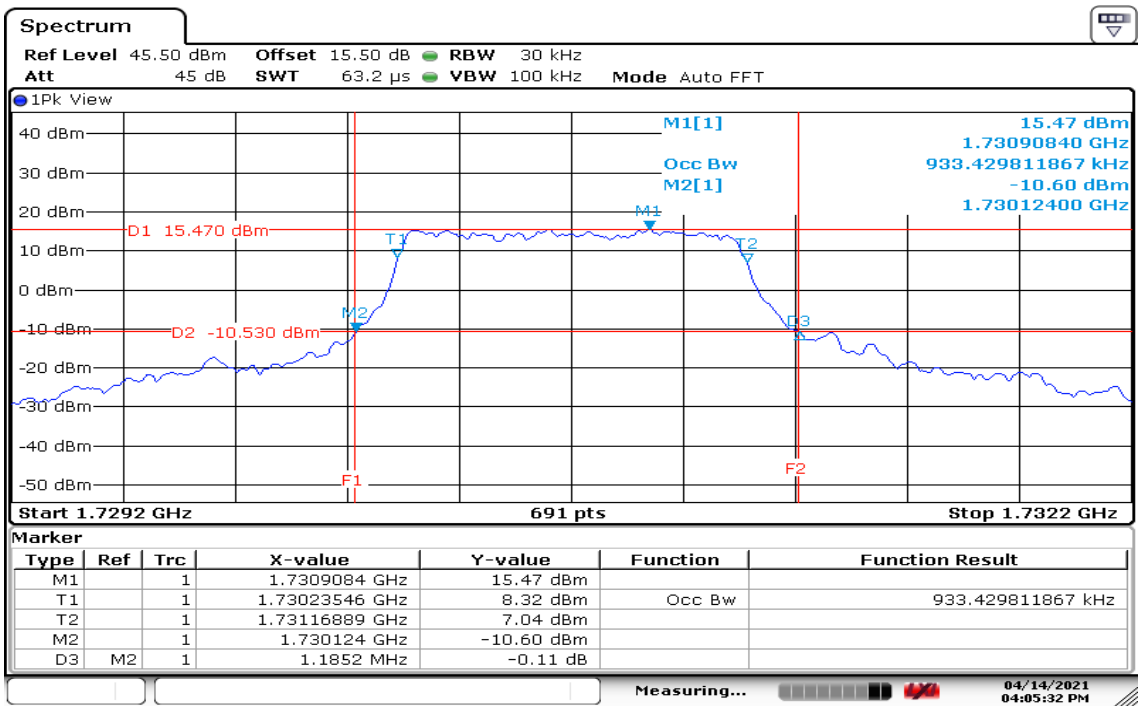

Marker						
Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.7309084 GHz	15.47 dBm		
T1		1	1.73023546 GHz	8.32 dBm	Occ Bw	933.429811867 kHz
T2		1	1.73116889 GHz	7.04 dBm		
M2		1	1.730124 GHz	-10.60 dBm		
D3	M2	1	1.1852 MHz	-0.11 dB		

Date: 14.APR.2021 16:05:33

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

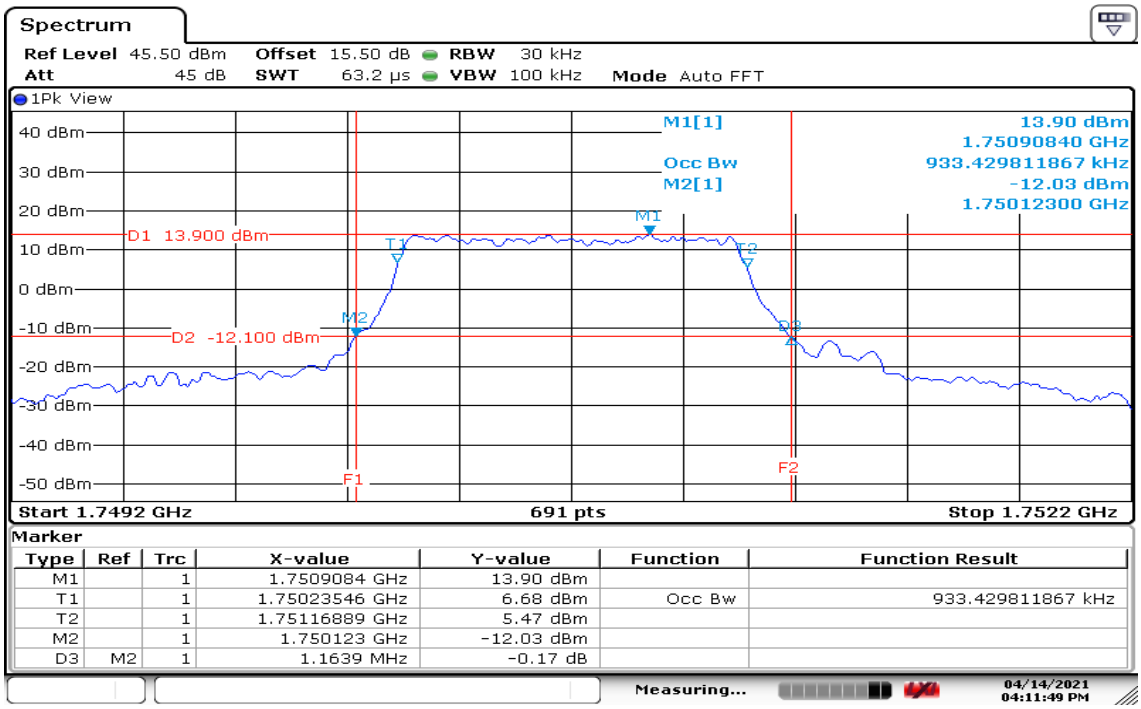

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.7509084 GHz	13.90 dBm		
T1		1	1.75023546 GHz	6.68 dBm	Occ Bw	933.429811867 kHz
T2		1	1.75116889 GHz	5.47 dBm		
M2		1	1.750123 GHz	-12.03 dBm		
D3	M2	1	1.1639 MHz	-0.17 dB		

Date: 14.APR.2021 16:11:49

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

BW: 10MHz

CH Low

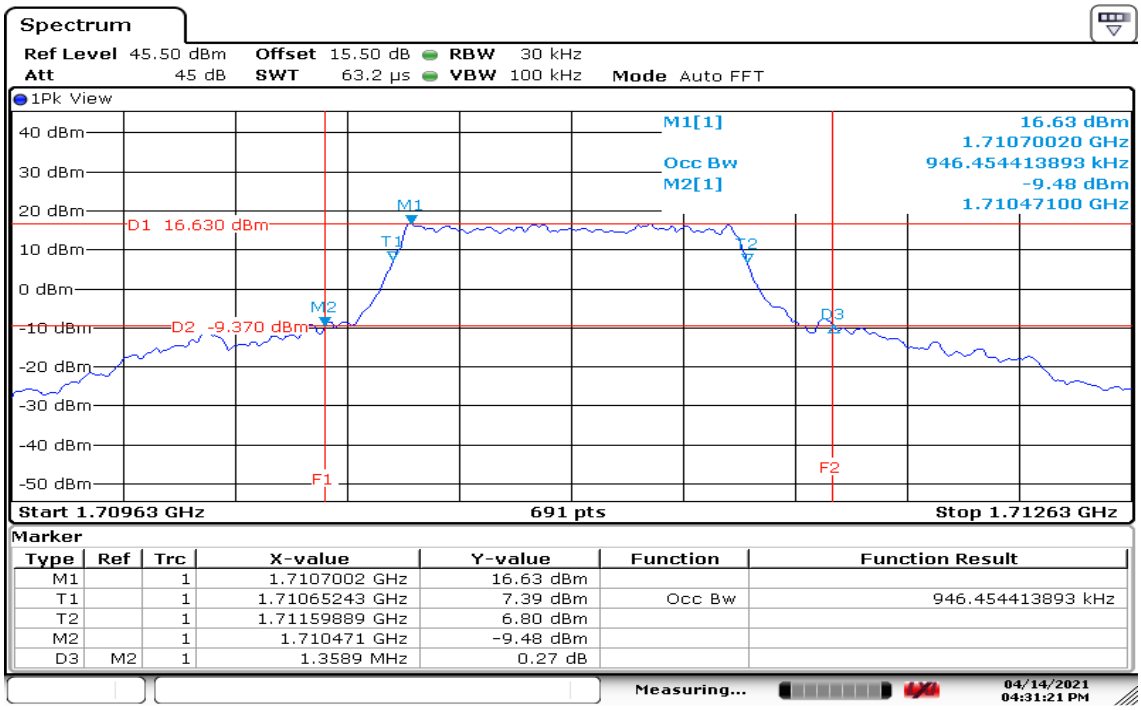

Date: 14.APR.2021 16:31:21

CH Mid

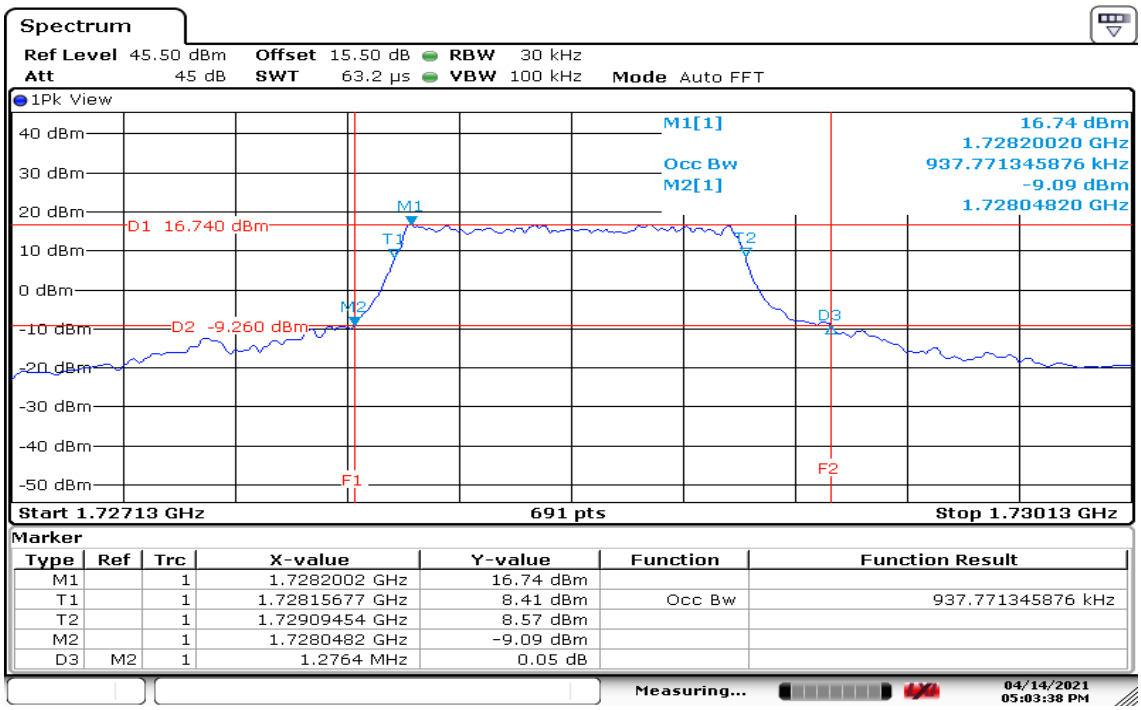

Date: 14.APR.2021 17:03:39

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

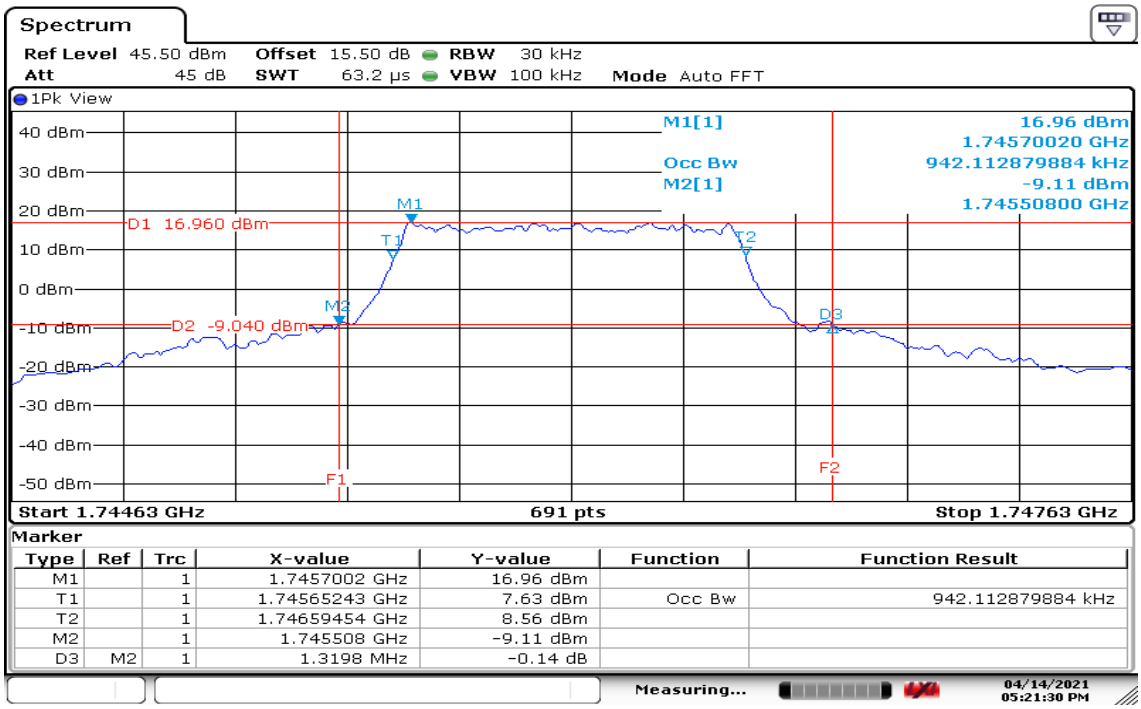

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.7457002 GHz	16.96 dBm		
T1		1	1.74565243 GHz	7.63 dBm	Occ Bw	942.112879884 kHz
T2		1	1.74659454 GHz	8.56 dBm		
M2		1	1.745508 GHz	-9.11 dBm		
D3	M2	1	1.3198 MHz	-0.14 dB		

Date: 14.APR.2021 17:21:30

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

BW: 15MHz

CH Low

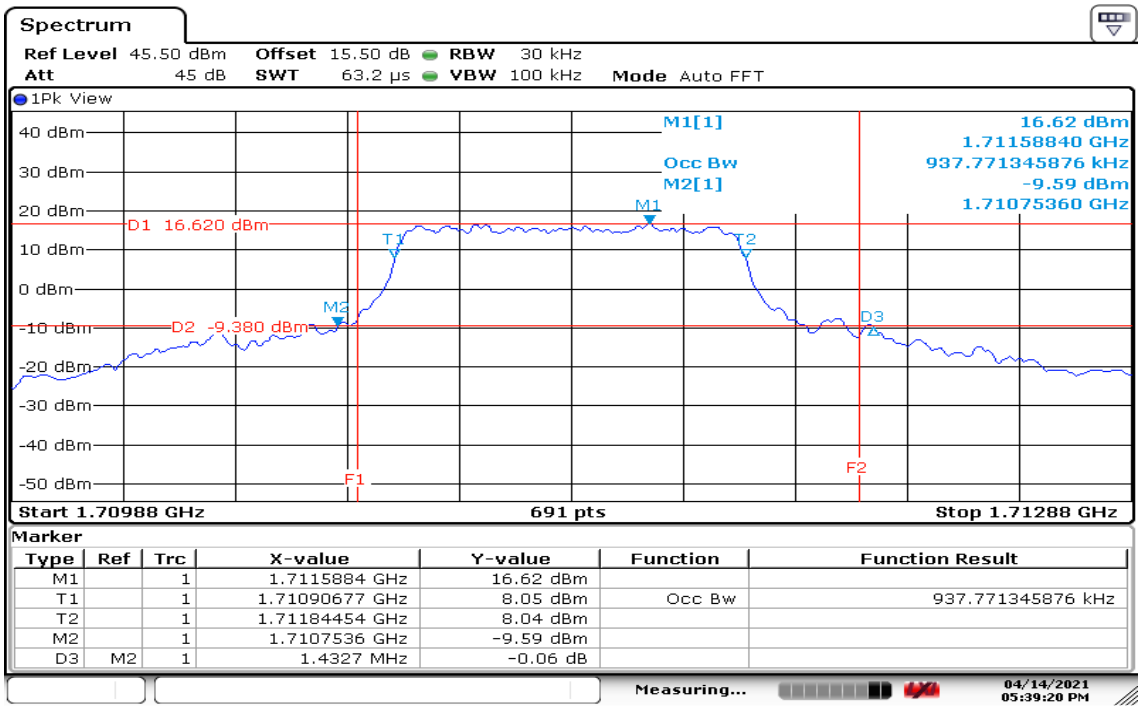

Date: 14.APR.2021 17:39:20

CH Mid

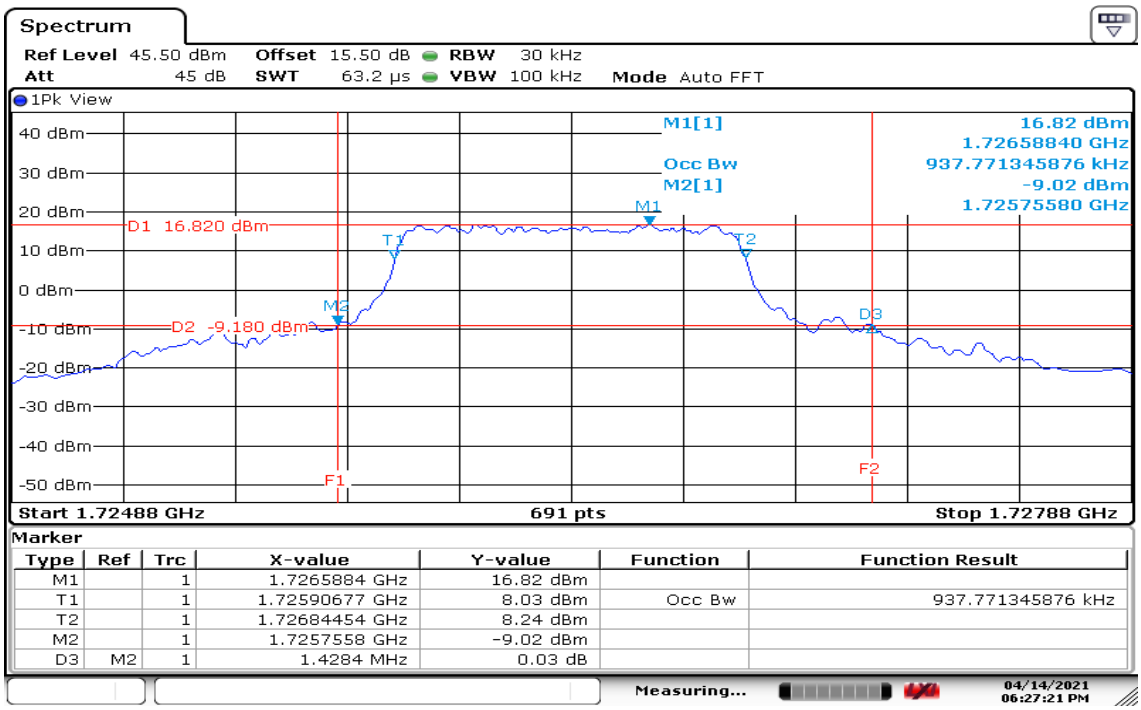

Date: 14.APR.2021 18:27:21

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

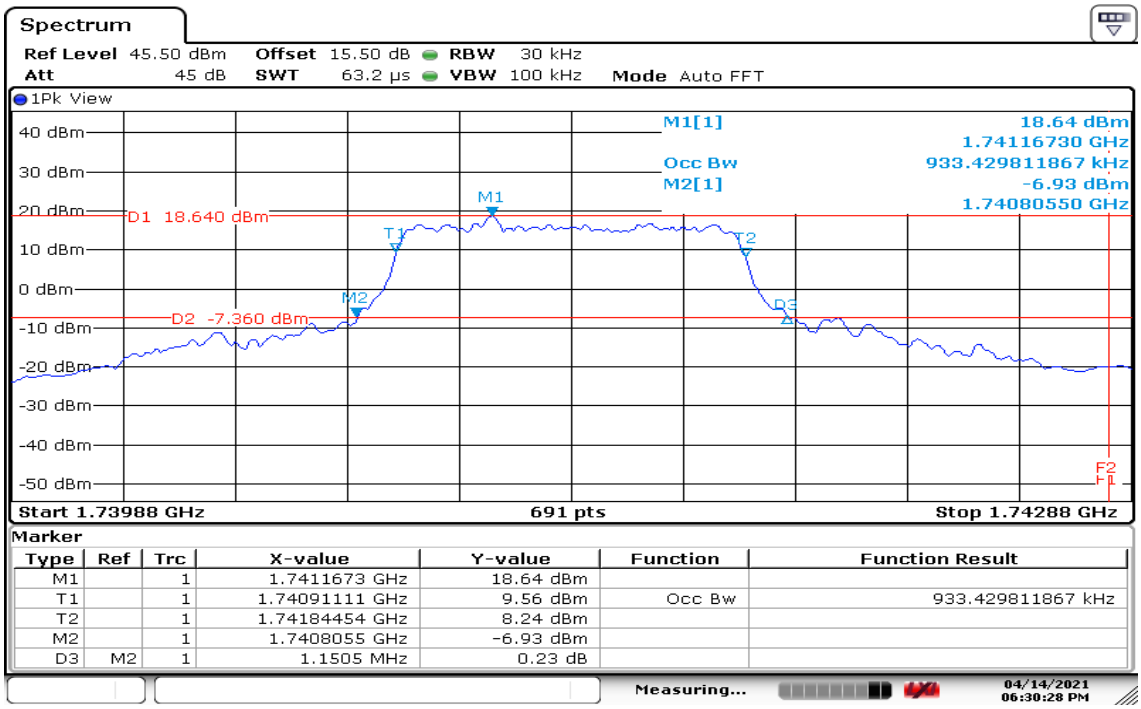

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.7411673 GHz	18.64 dBm		
T1		1	1.74091111 GHz	9.56 dBm	Occ Bw	933.429811867 kHz
T2		1	1.74184454 GHz	8.24 dBm		
M2		1	1.7408055 GHz	-6.93 dBm		
D3	M2	1	1.1505 MHz	0.23 dB		

Date: 14.APR.2021 18:30:29

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

BW: 20MHz

CH Low

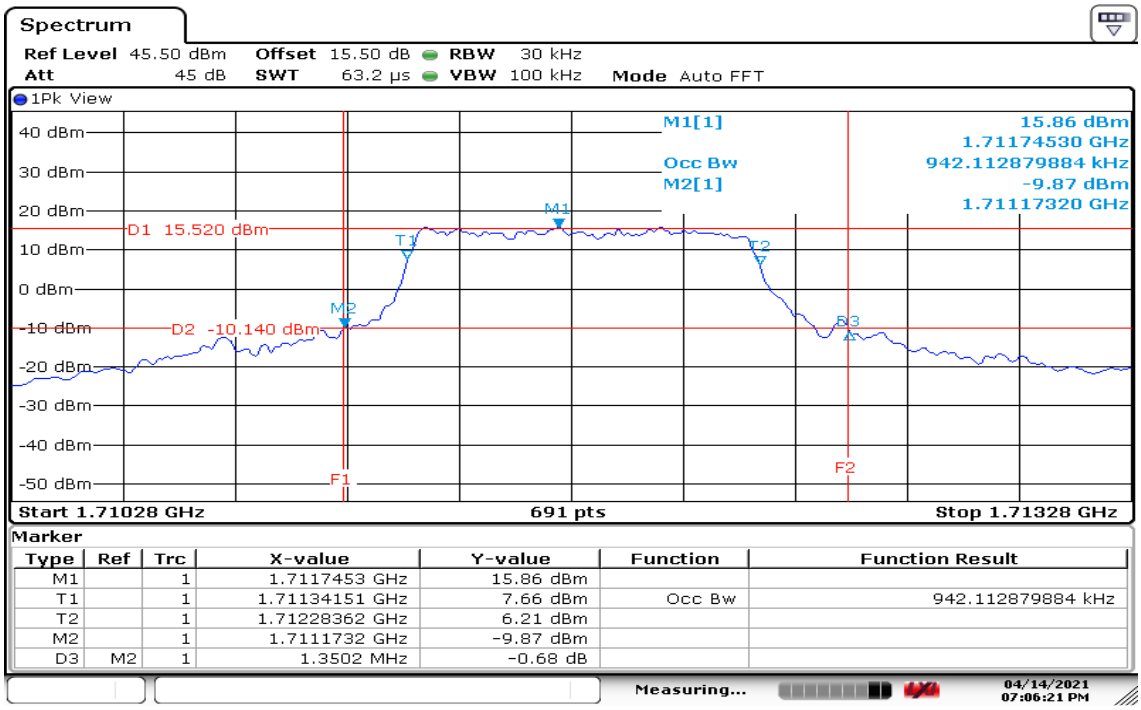

Date: 14.APR.2021 19:06:22

CH Mid

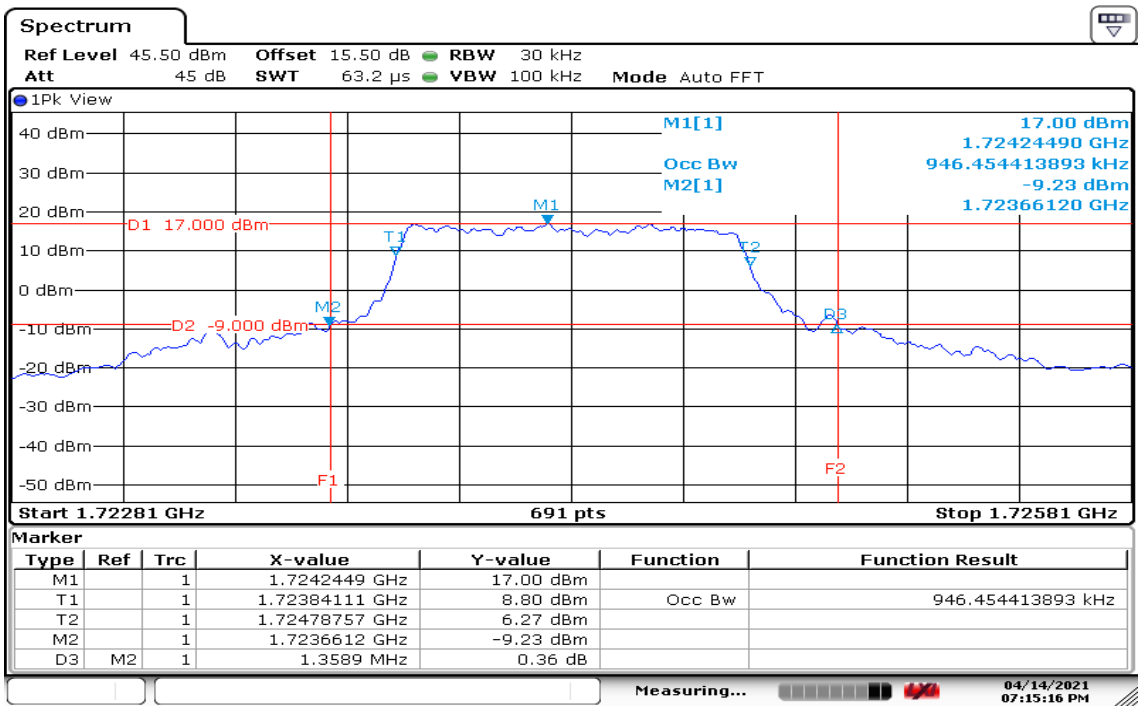

Date: 14.APR.2021 19:15:16

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

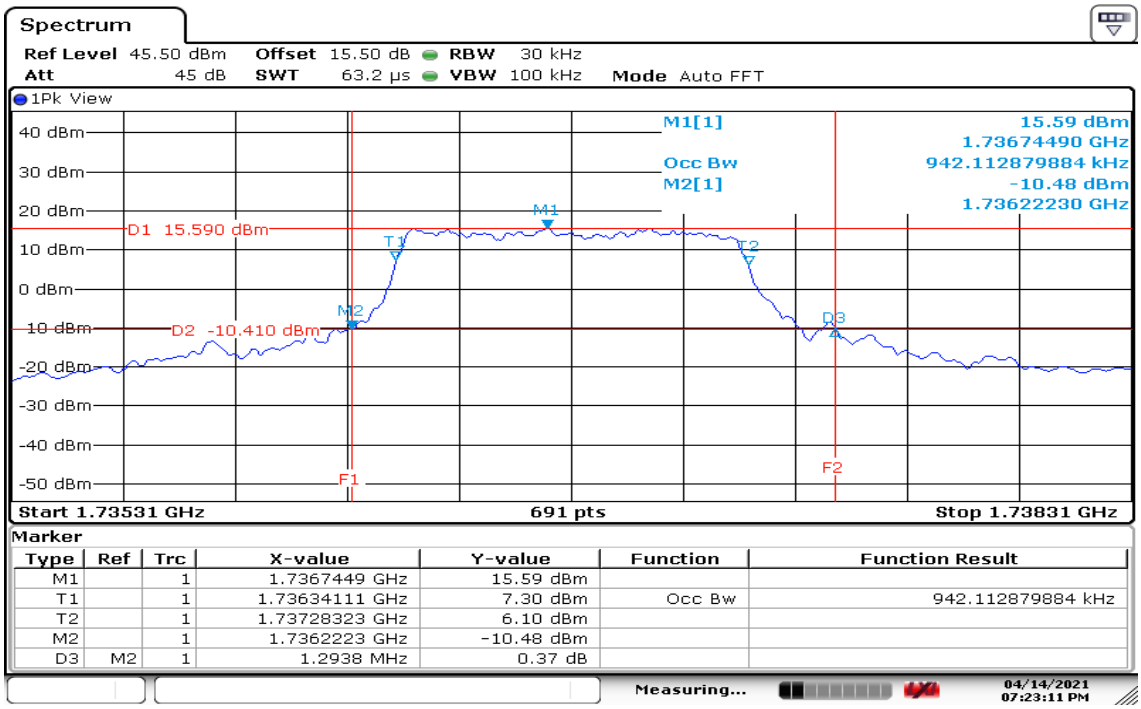

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	1.7367449 GHz	15.59 dBm		
T1		1	1.73634111 GHz	7.30 dBm	Occ Bw	942.112879884 kHz
T2		1	1.73728323 GHz	6.10 dBm		
M2		1	1.7362223 GHz	-10.48 dBm		
D3	M2	1	1.2938 MHz	0.37 dB		

Date: 14.APR.2021 19:23:11

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

8.4 PEAK TO AVERAGE POWER RATIO

LIMIT

In measuring transmissions in this band using an average power technique, peak-to-average power ratio (PAPR) of the transmission may not exceed 13 dB.

TEST PROCEDURES

1. According to KDB 971168D01.
2. The EUT was connect to spectrum analyzer and call box.
3. Set the CCDF function in spectrum analyzer.
4. The highest RF output power were measured and recorded the maximum PAPR level associated with a probability of 0.1%.
5. Record the Peak to Average Power Ratio.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

TEST RESULTS

LTE Band 4

Temperature: 23.1℃ **Humidity:** 52.5% RH

Tested by: Dally Hong **Test Date:** April 14, 2021

CHANNEL BANDWIDTH: 1.4MHz / QPSK / Full RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
19957	1710.7	8.00
20175	1732.5	8.41
20393	1754.3	5.36

CHANNEL BANDWIDTH: 3MHz / QPSK / Full RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
19957	1710.7	8.06
20175	1732.5	4.75
20393	1754.3	6.75

CHANNEL BANDWIDTH: 5MHz / QPSK / Full RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
19957	1710.7	8.17
20175	1732.5	8.49
20393	1754.3	5.74

CHANNEL BANDWIDTH: 10MHz / QPSK / Full RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
19957	1710.7	8.49
20175	1732.5	8.26
20393	1754.3	8.70

CHANNEL BANDWIDTH: 15MHz / QPSK / Full RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
19957	1710.7	8.55
20175	1732.5	6.26
20393	1754.3	8.29

CHANNEL BANDWIDTH: 20MHz / QPSK / Full RB

Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
19957	1710.7	8.55
20175	1732.5	8.49
20393	1754.3	8.58

Note: We selected worst case to performed test in middle channel, the results can be meet other channel.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

LTE Band 4

QPSK / RB =6, RB Offset = 0
BW: 1.4MHz
CH Low

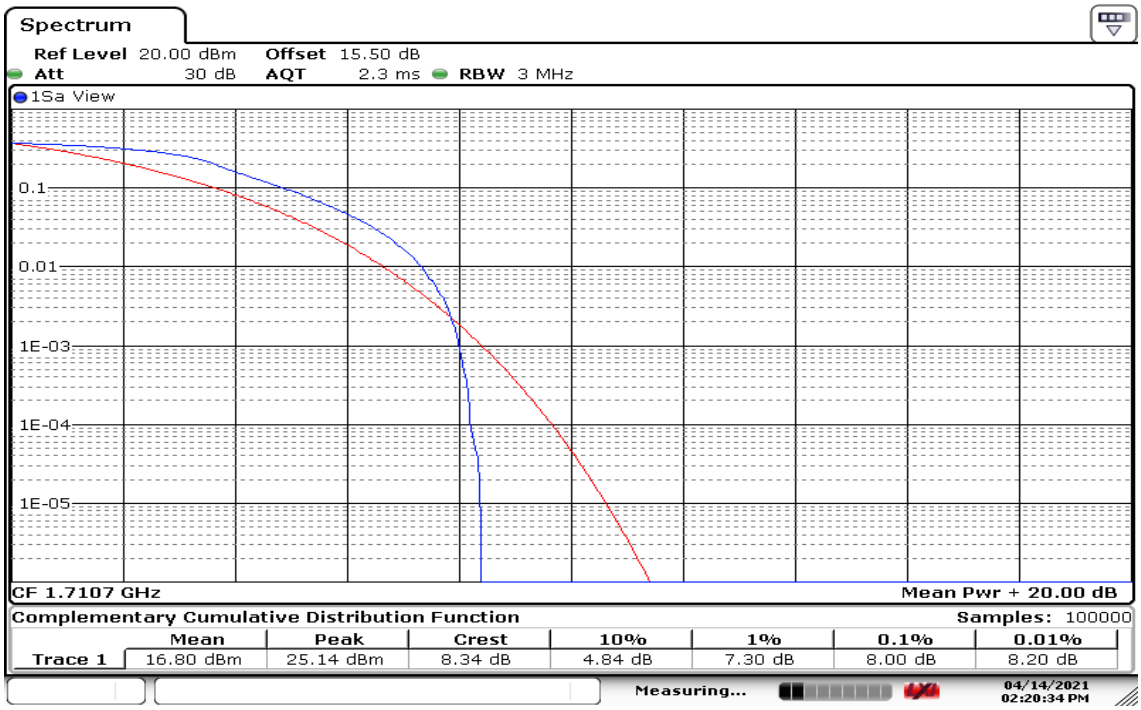

Date: 14.APR.2021 14:20:34

CH Mid

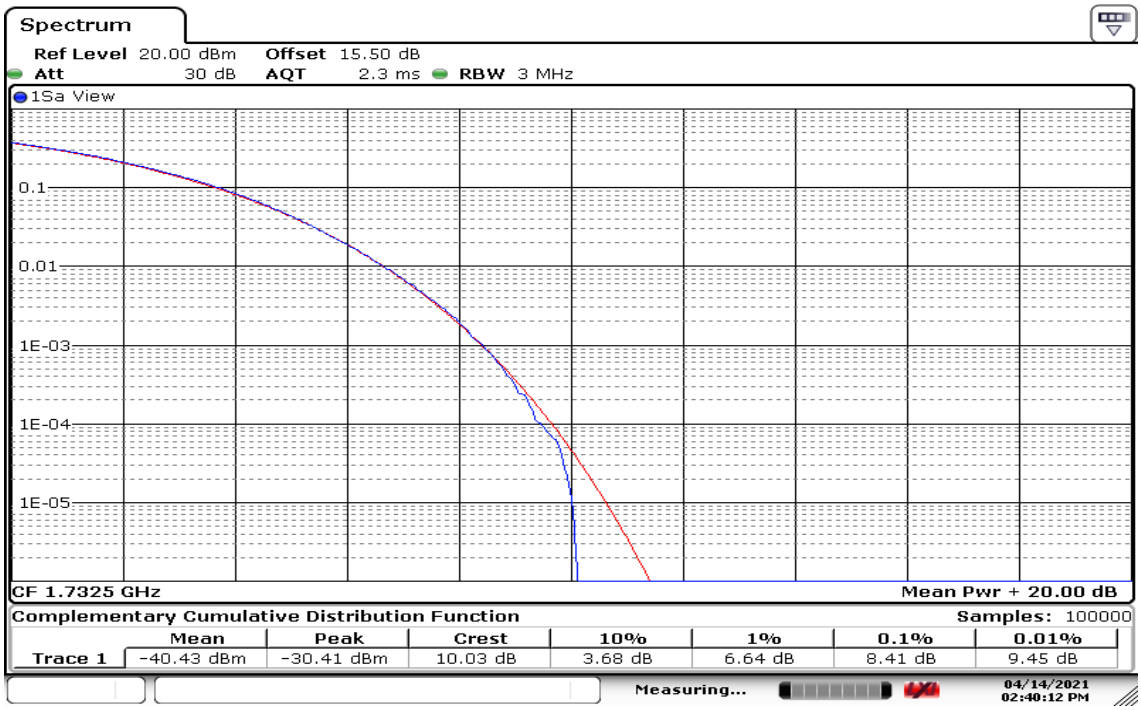

Date: 14.APR.2021 14:40:12

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

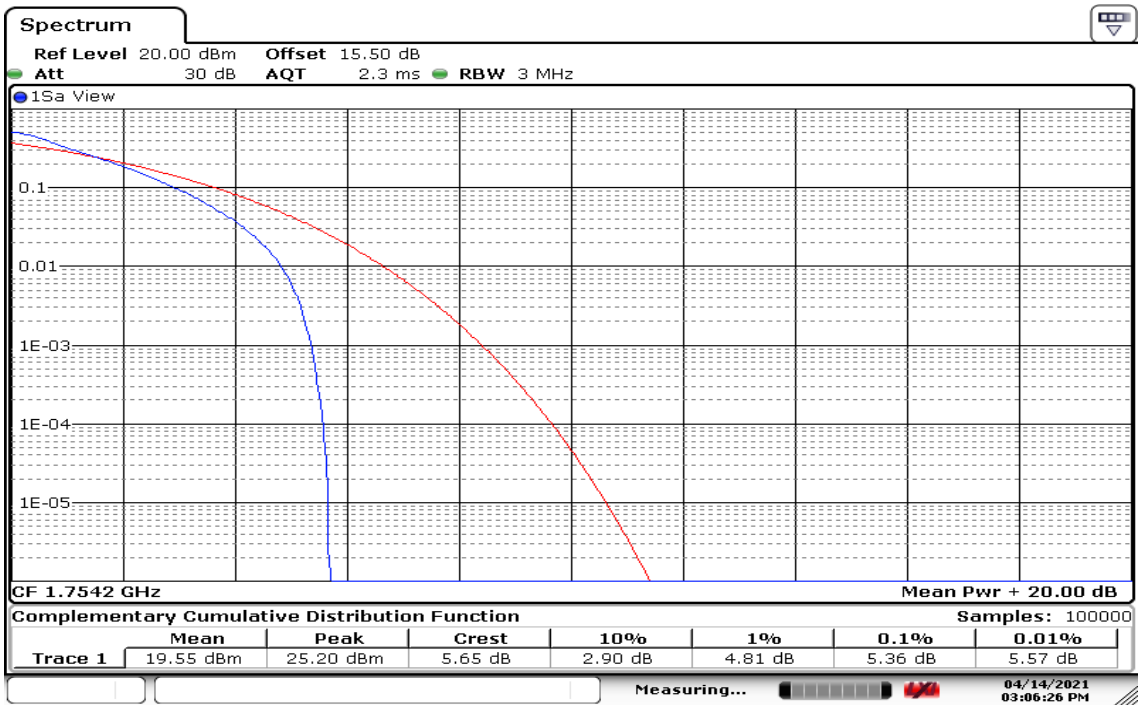

Date: 14.APR.2021 15:06:27

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

BW: 3MHz

CH Low

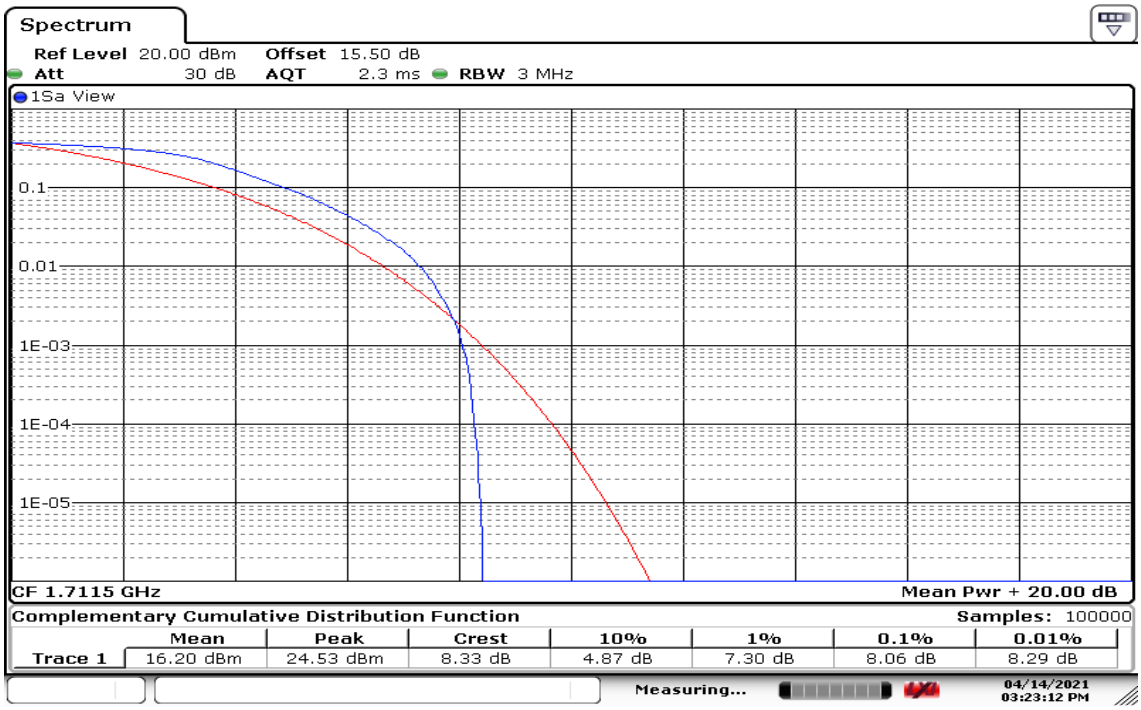

Date: 14.APR.2021 15:23:13

CH Mid

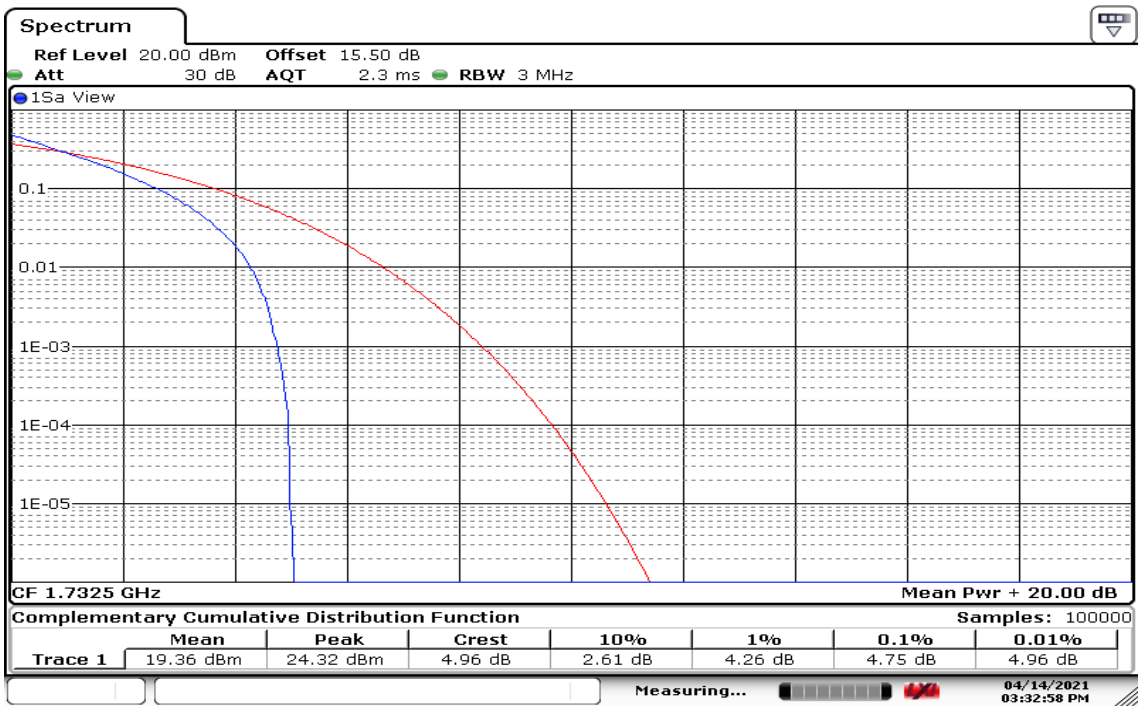

Date: 14.APR.2021 15:32:58

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

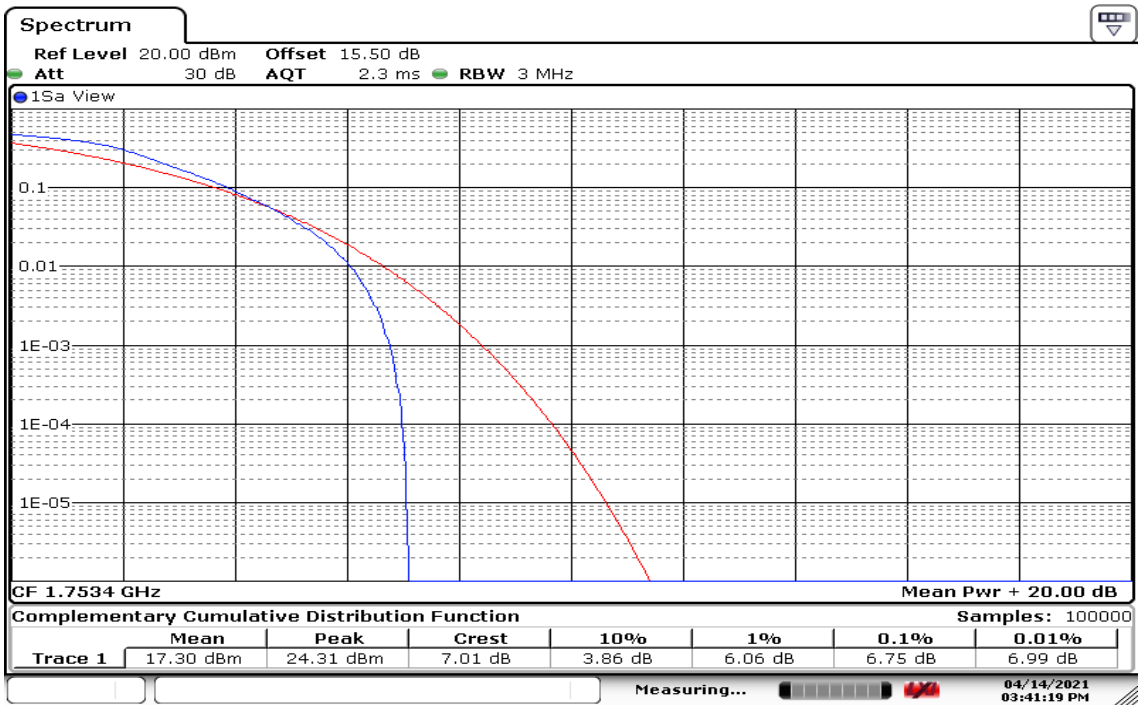

Date: 14.APR.2021 15:41:19

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

BW: 5MHz

CH Low

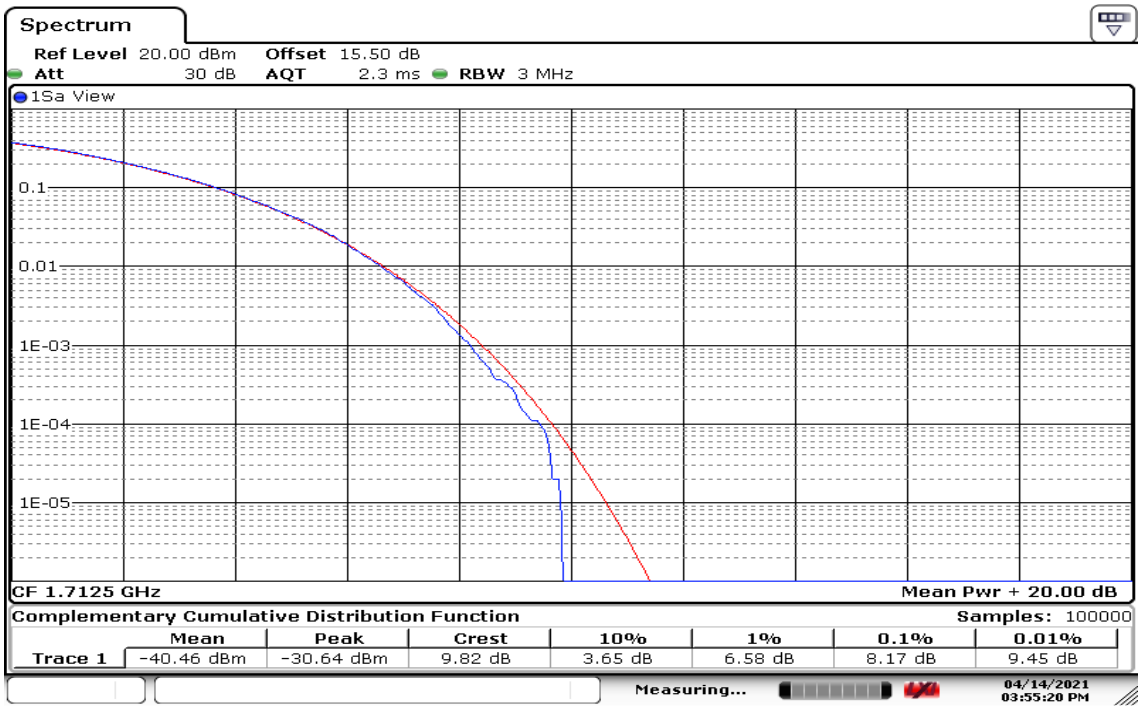

Date: 14.APR.2021 15:55:21

CH Mid

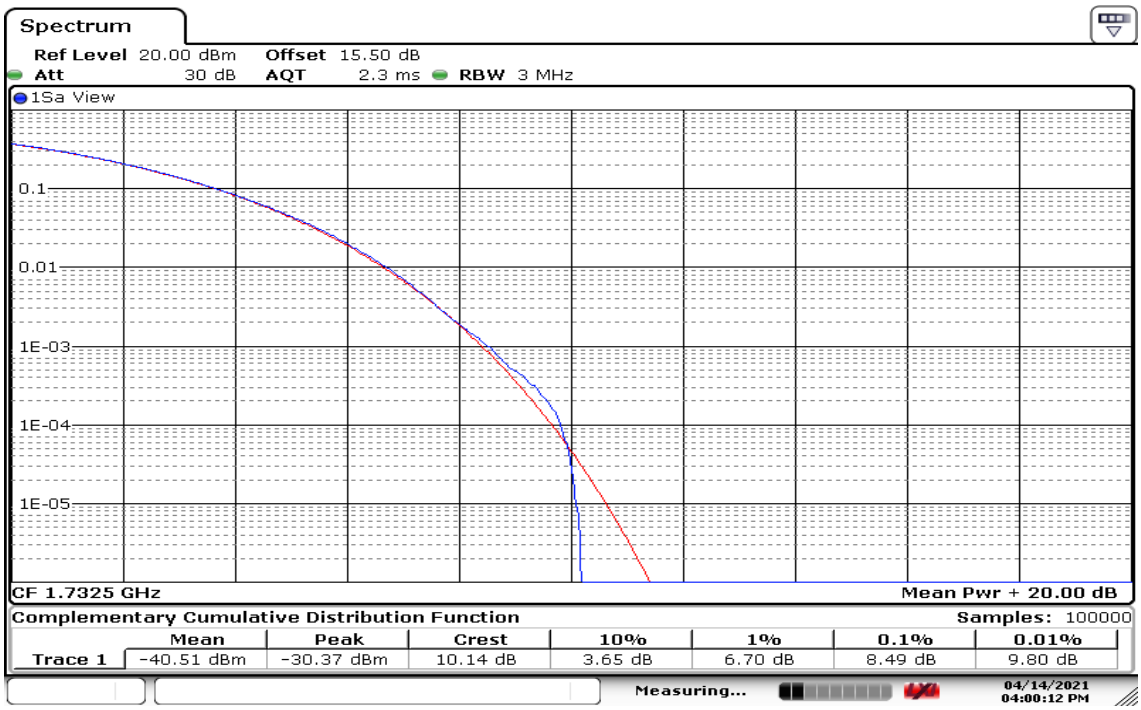

Date: 14.APR.2021 16:00:12

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

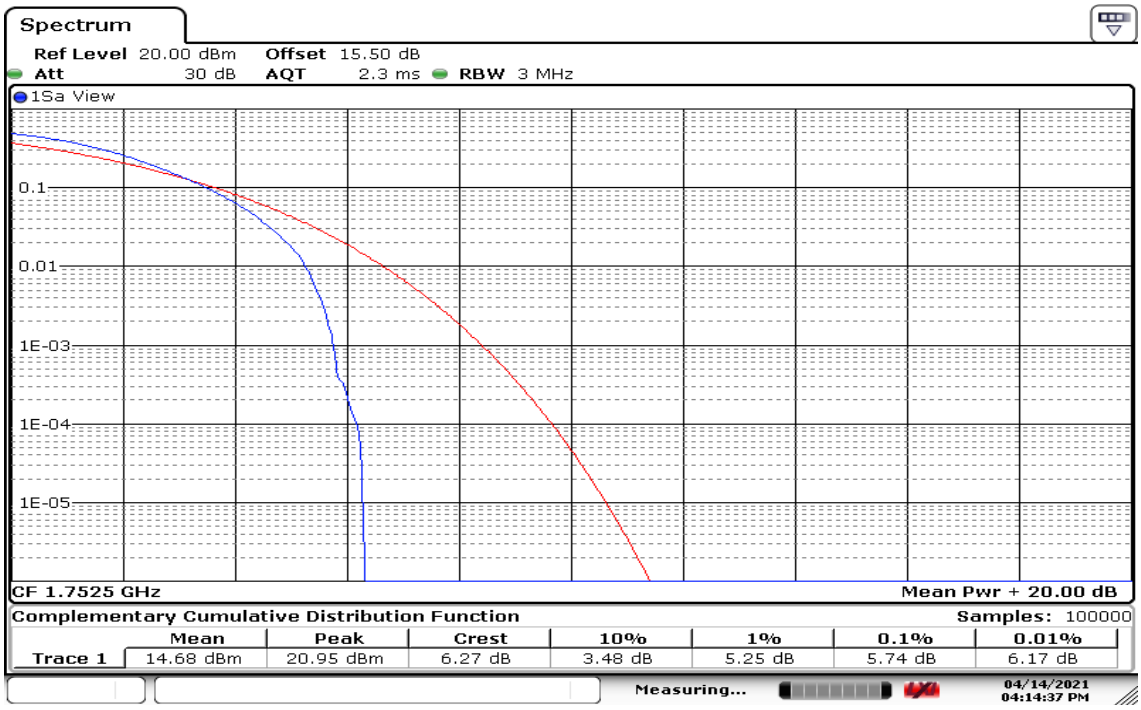

Date: 14.APR.2021 16:14:37

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

BW: 10MHz

CH Low

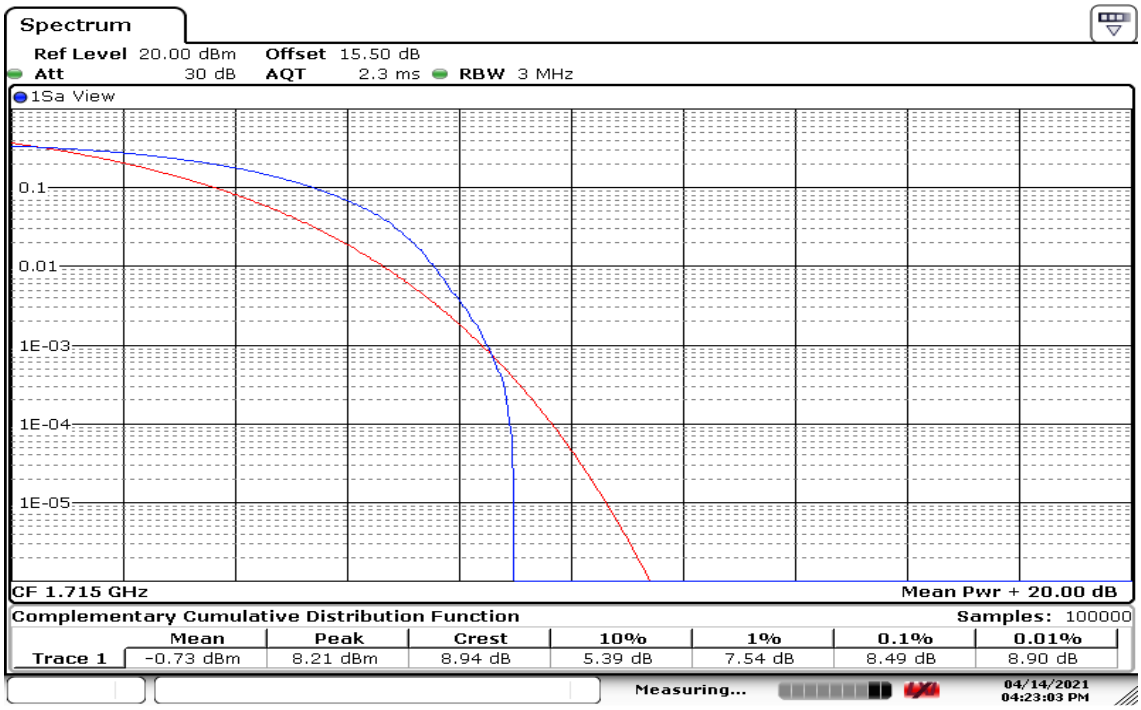

Date: 14.APR.2021 16:23:03

CH Mid

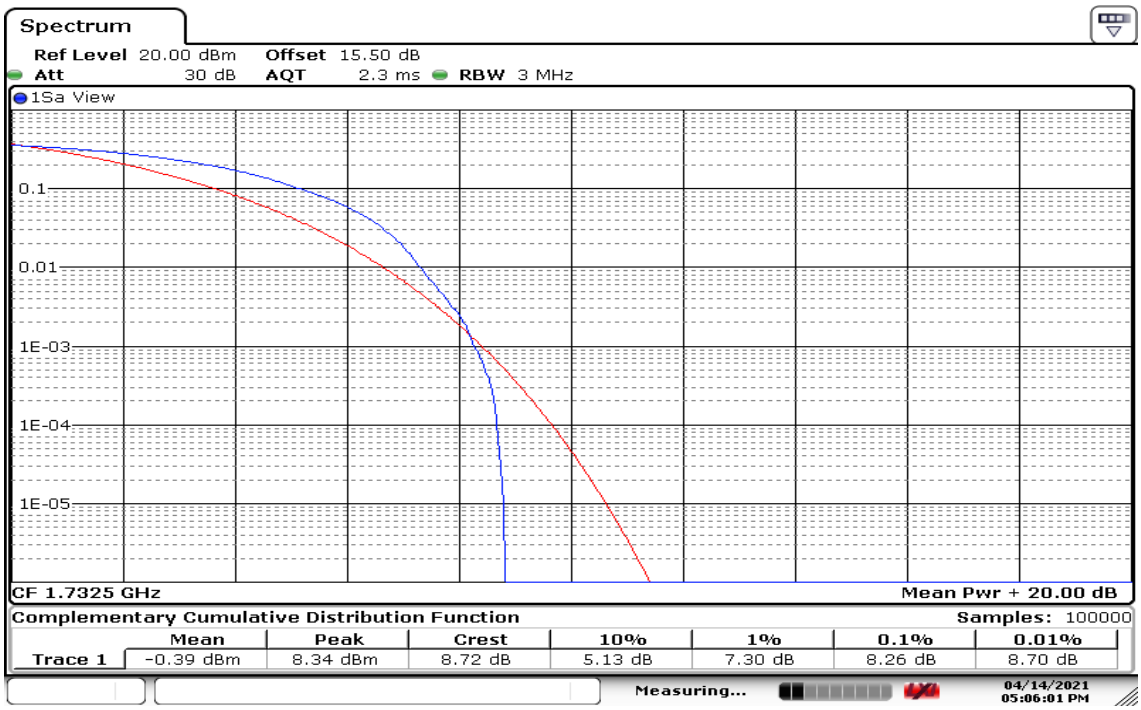

Date: 14.APR.2021 17:06:02

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

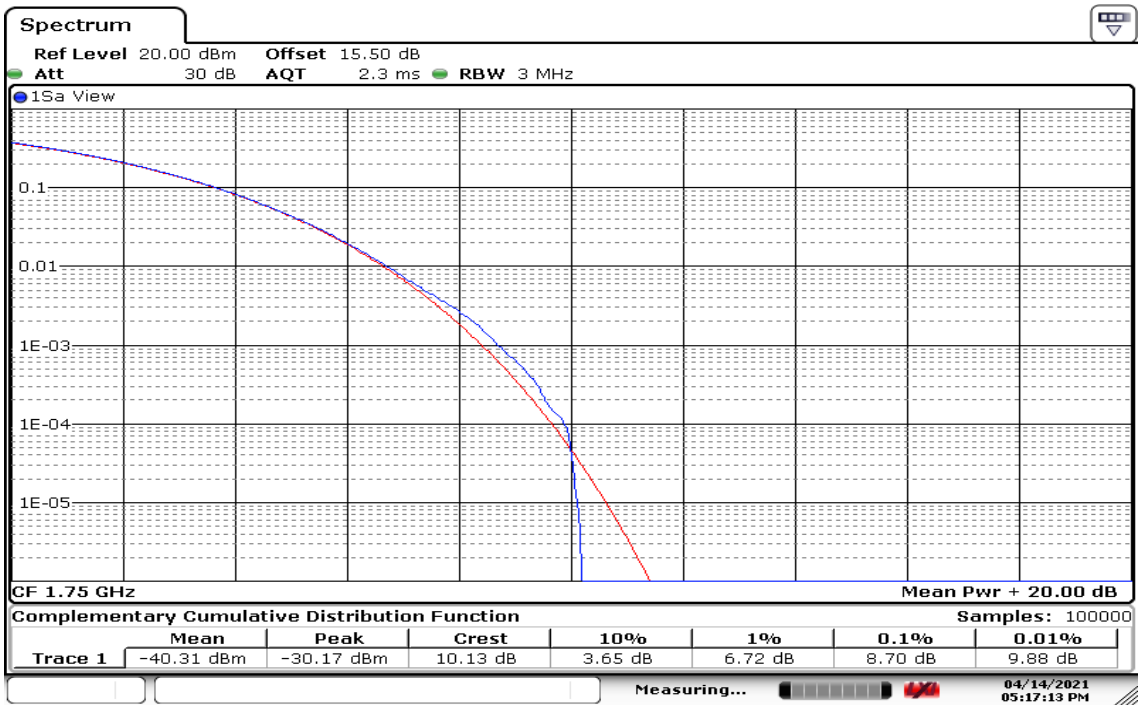

Date: 14.APR.2021 17:17:13

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

BW: 15MHz

CH Low

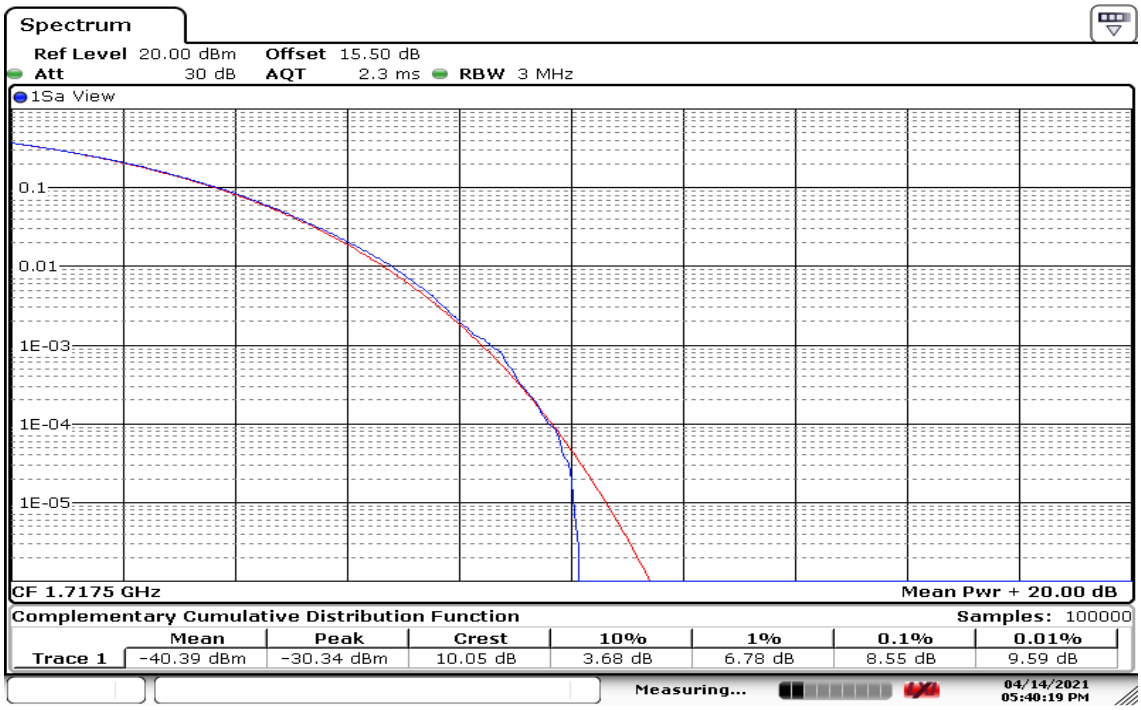

Date: 14.APR.2021 17:40:19

CH Mid

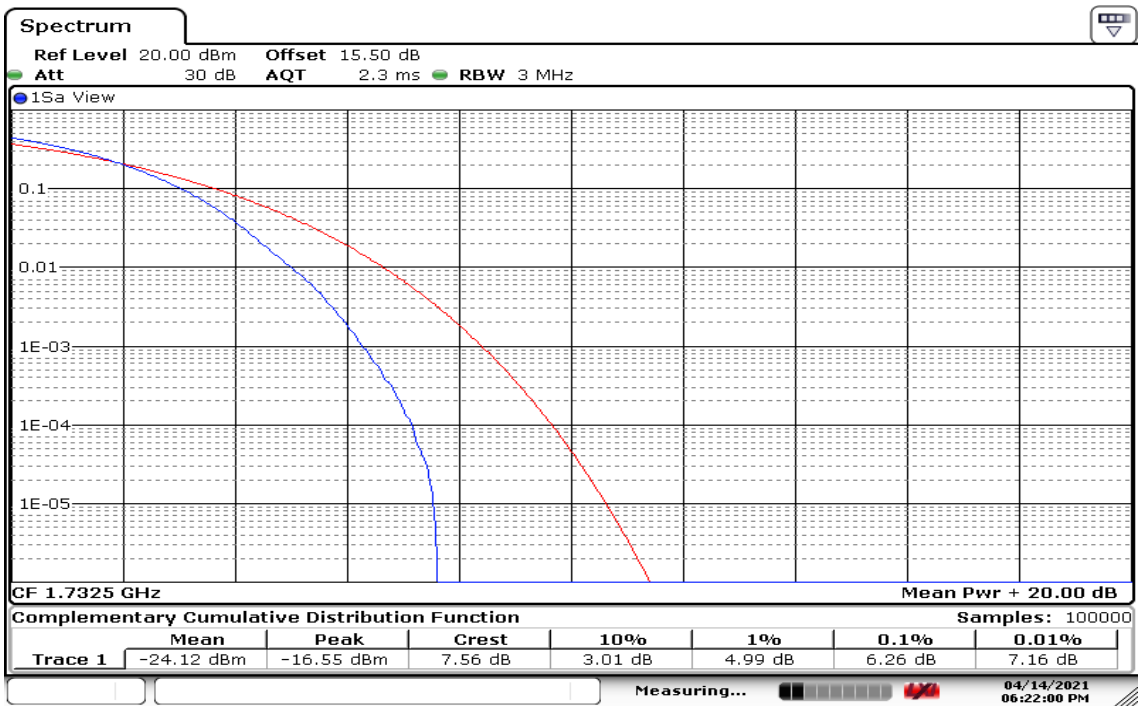

Date: 14.APR.2021 18:22:01

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

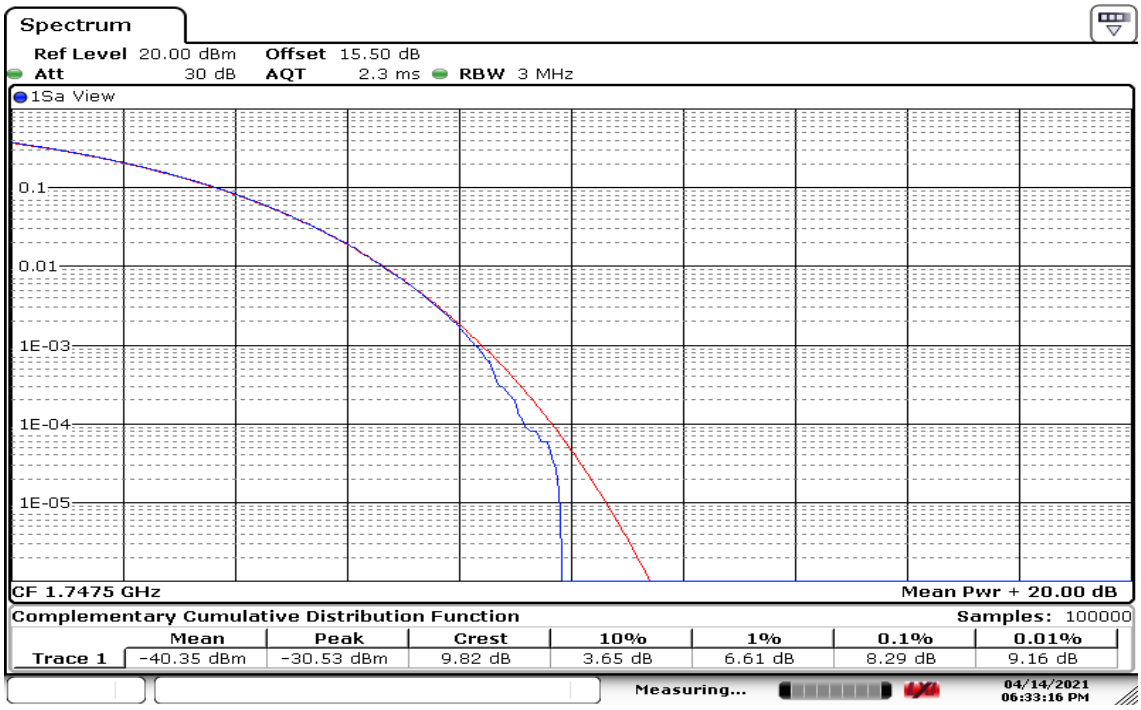

Date: 14.APR.2021 18:33:16

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

BW: 20MHz

CH Low

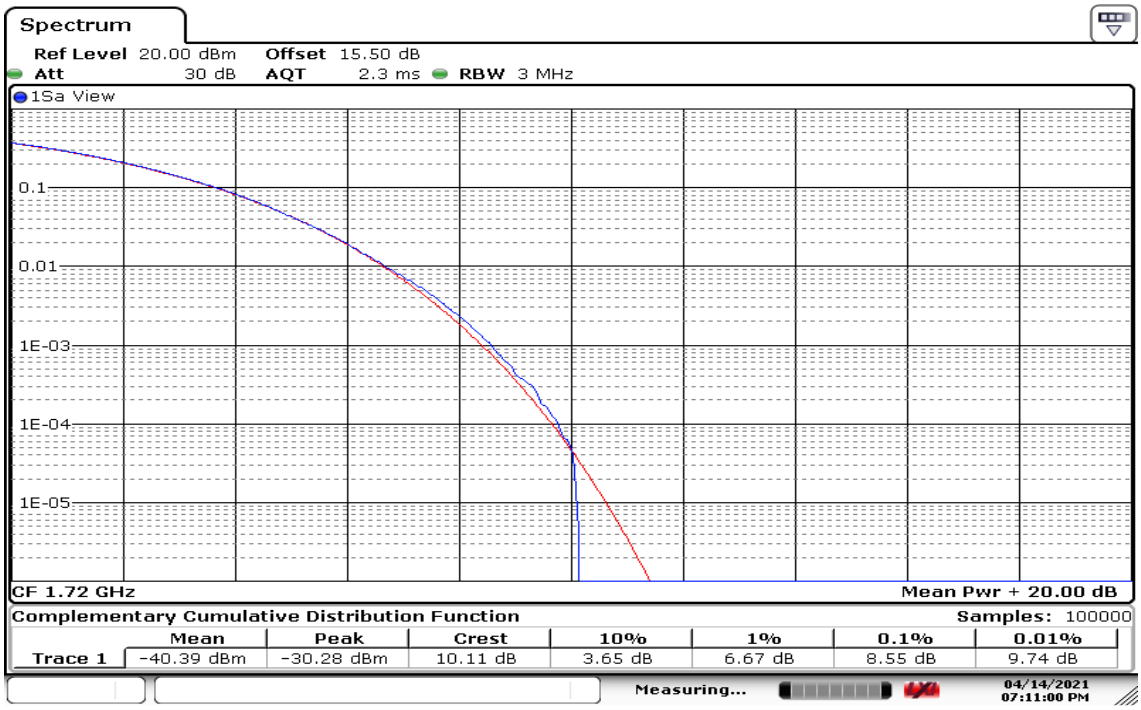

Date: 14.APR.2021 19:11:00

CH Mid

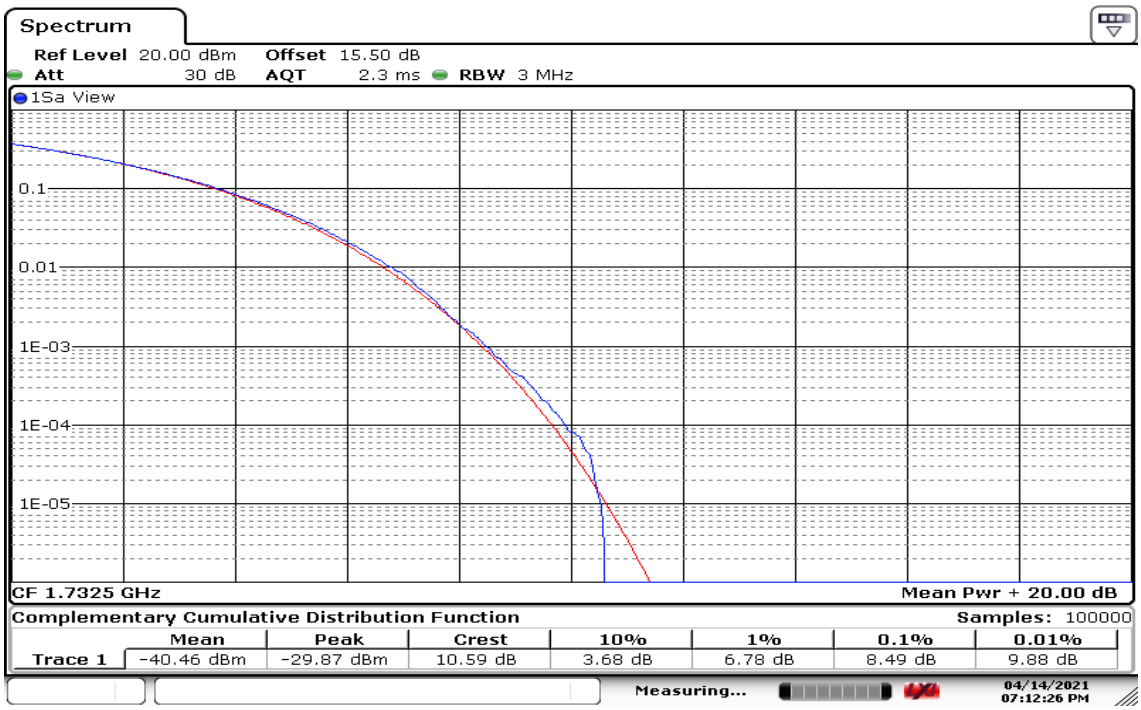

Date: 14.APR.2021 19:12:26

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

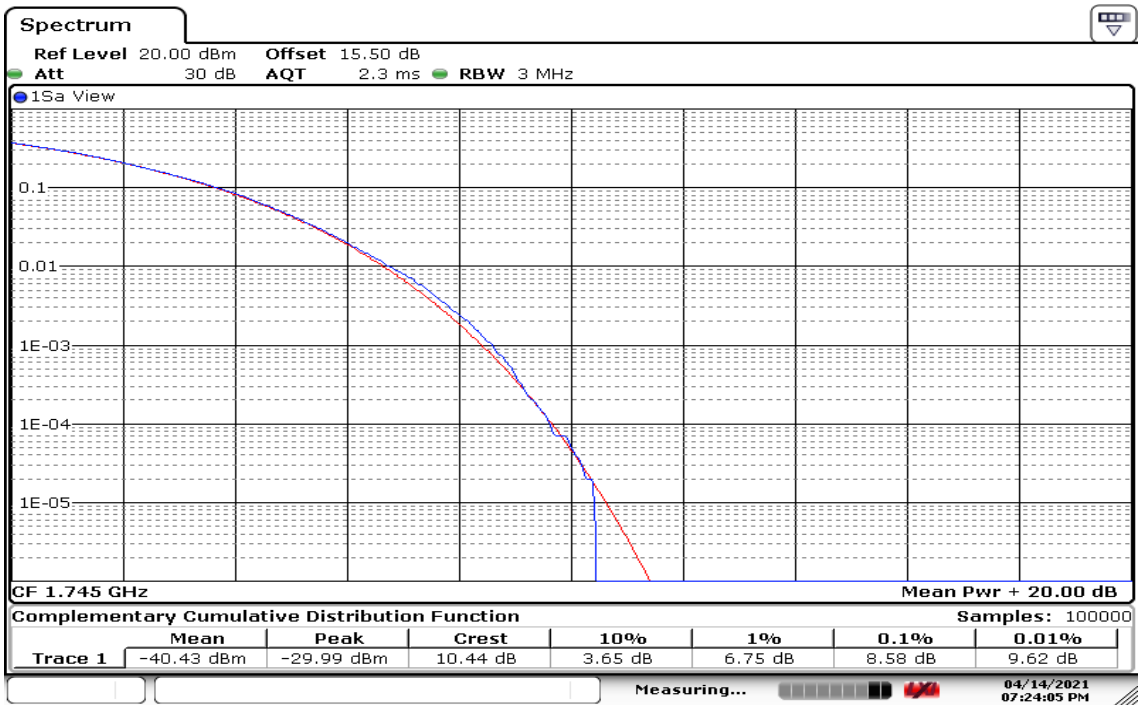

Date: 14.APR.2021 19:24:05

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

8.5 BAND EDGE MEASUREMENT

LIMIT

Part 27.53(h), Band 4
General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least 43 + 10 log10 (P) dB.

TEST PROCEDURES

KDB 971168 D01 Power Meas License Digital Systems – Section 6.0
1. RBW ≥ 1% of the emission bandwidth
2. VBW ≥ 3 x RBW
3. Span was set large enough so as to capture all out of emissions near the band edge.

TEST RESULTS:

Temperature:	23.1℃	**Humidity:**	52.5% RH
Tested by:	Dally Hong	**Test Date:**	April 14, 2021

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

LTE Band 4

CHANNEL BANDWIDTH: 1.4MHz / QPSK / 1RB ALLOCATION

LOWER BAND EDGE

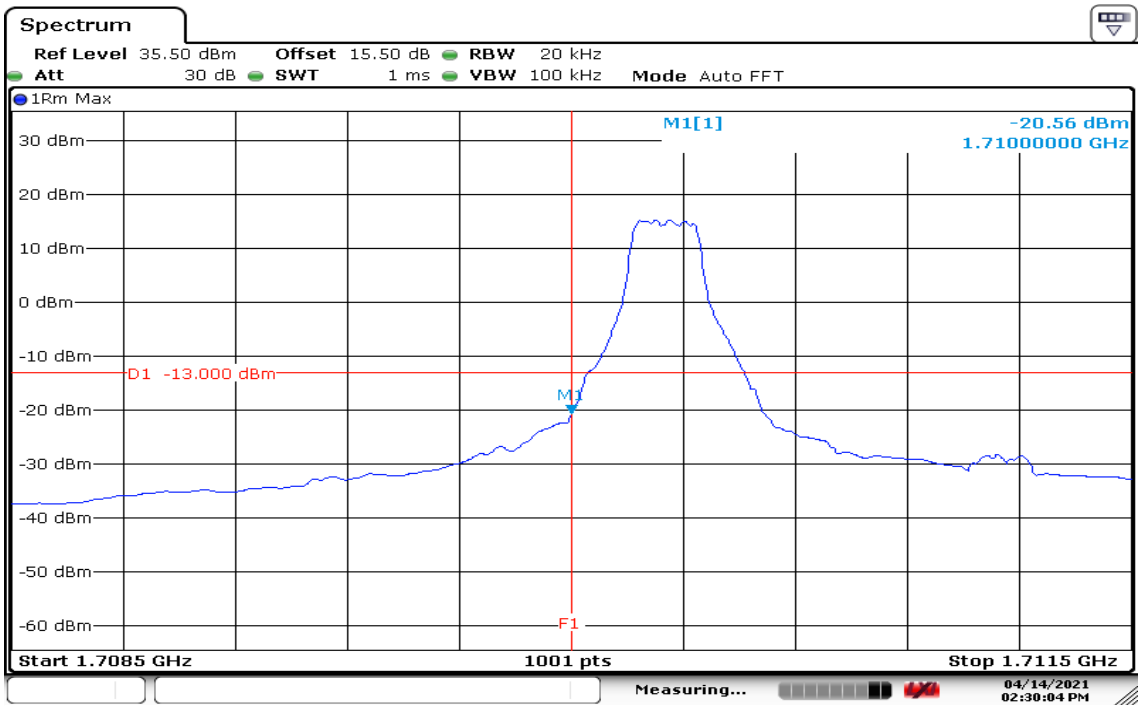

Date: 14.APR.2021 14:30:04

HIGHER BAND EDGE

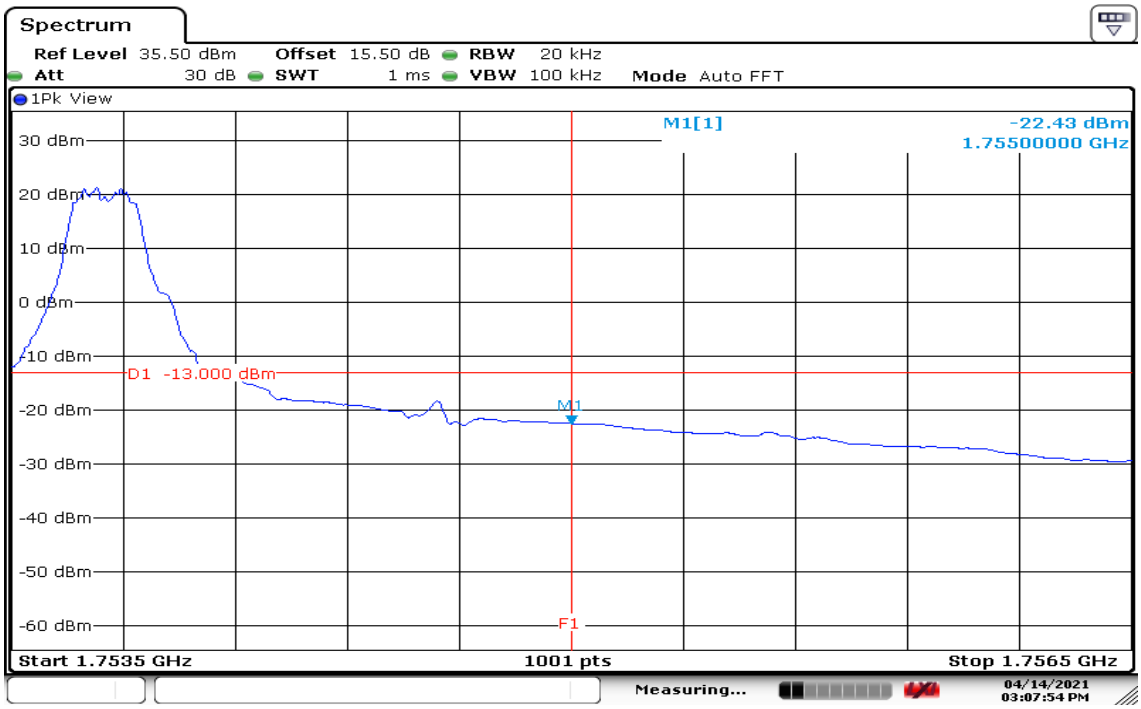

Date: 14.APR.2021 15:07:54

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CHANNEL BANDWIDTH: 3MHz / QPSK / 1RB ALLOCATION

LOWER BAND EDGE

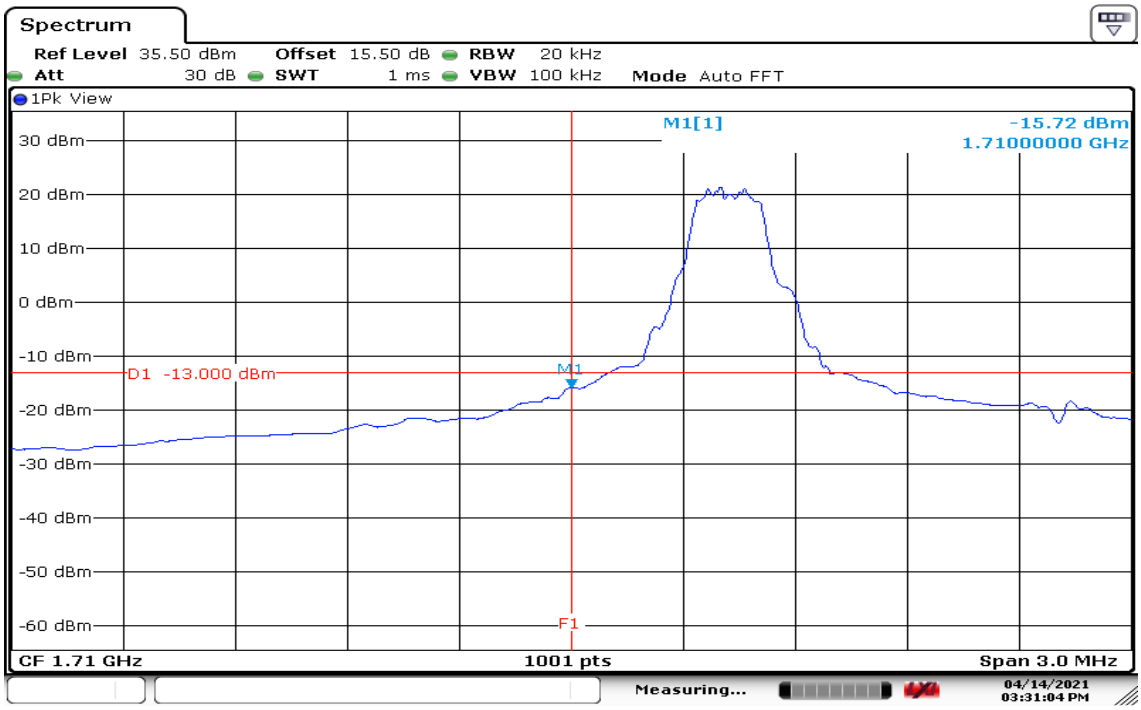

Date: 14.APR.2021 15:31:05

HIGHER BAND EDGE

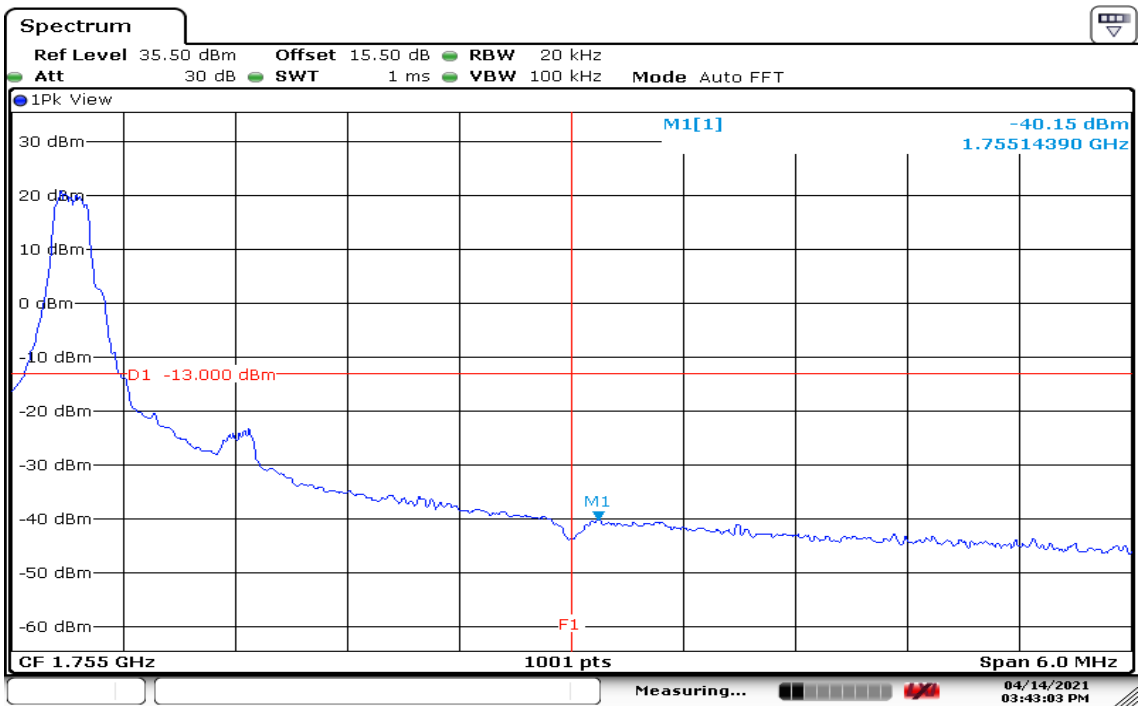

Date: 14.APR.2021 15:43:03

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CHANNEL BANDWIDTH: 5MHz / QPSK / 1RB ALLOCATION

LOWER BAND EDGE

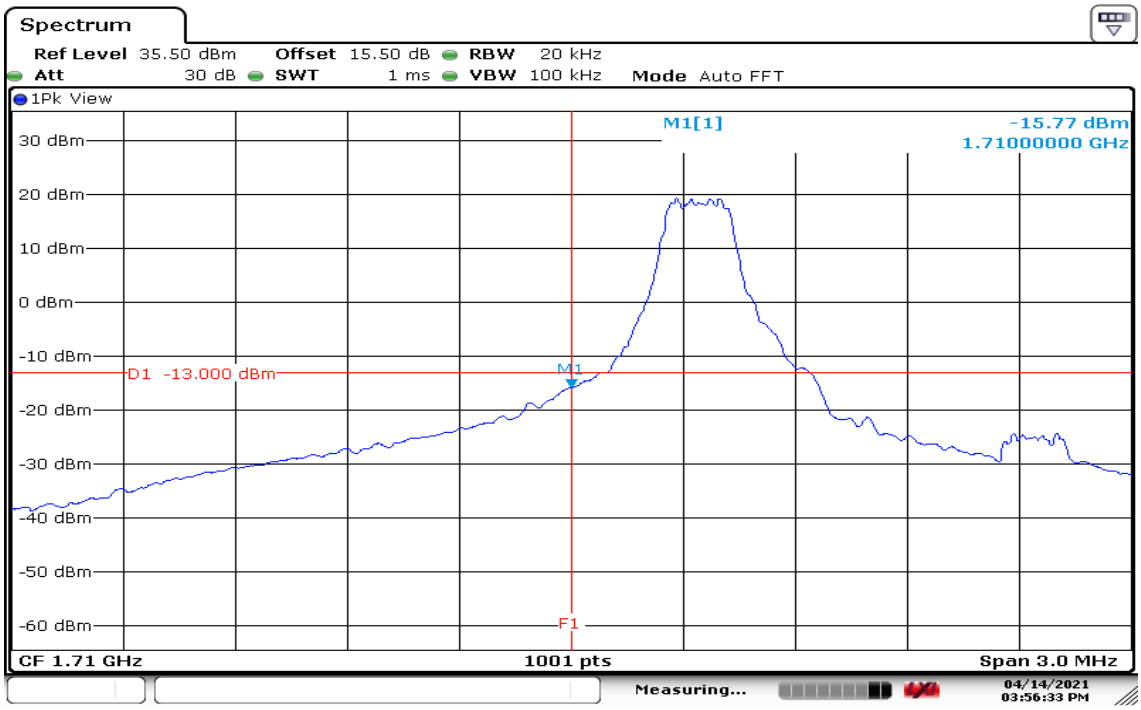

Date: 14.APR.2021 15:56:34

HIGHER BAND EDGE

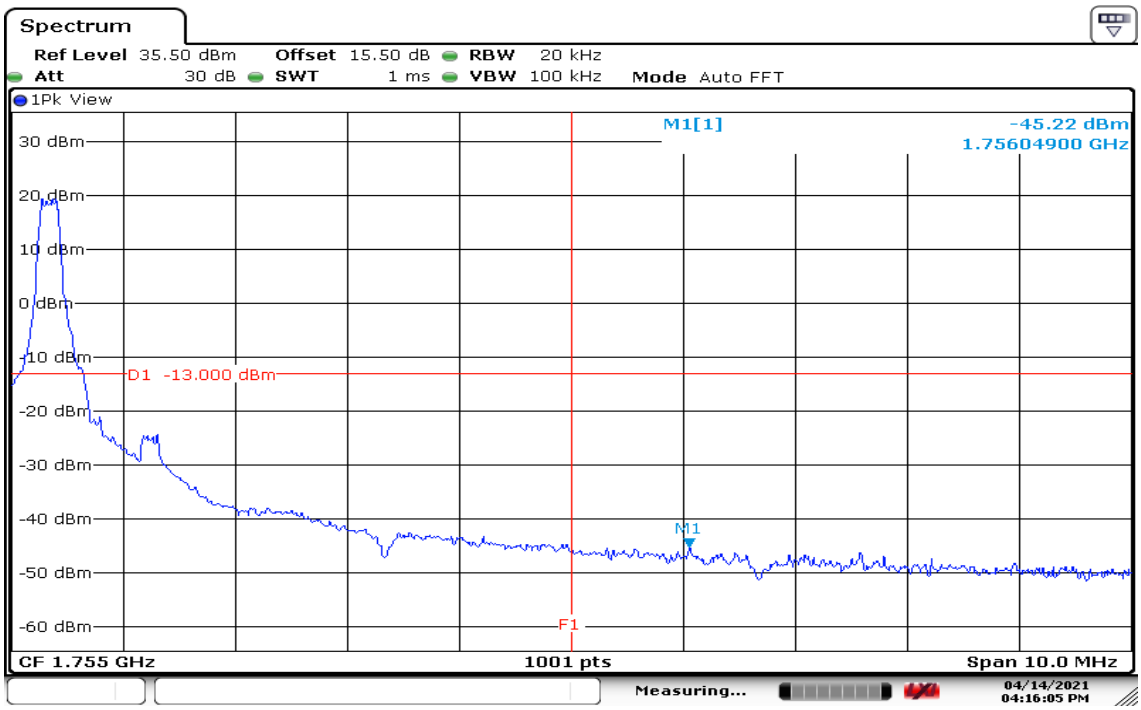

Date: 14.APR.2021 16:16:05

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CHANNEL BANDWIDTH: 10MHz / QPSK / 1RB ALLOCATION

LOWER BAND EDGE

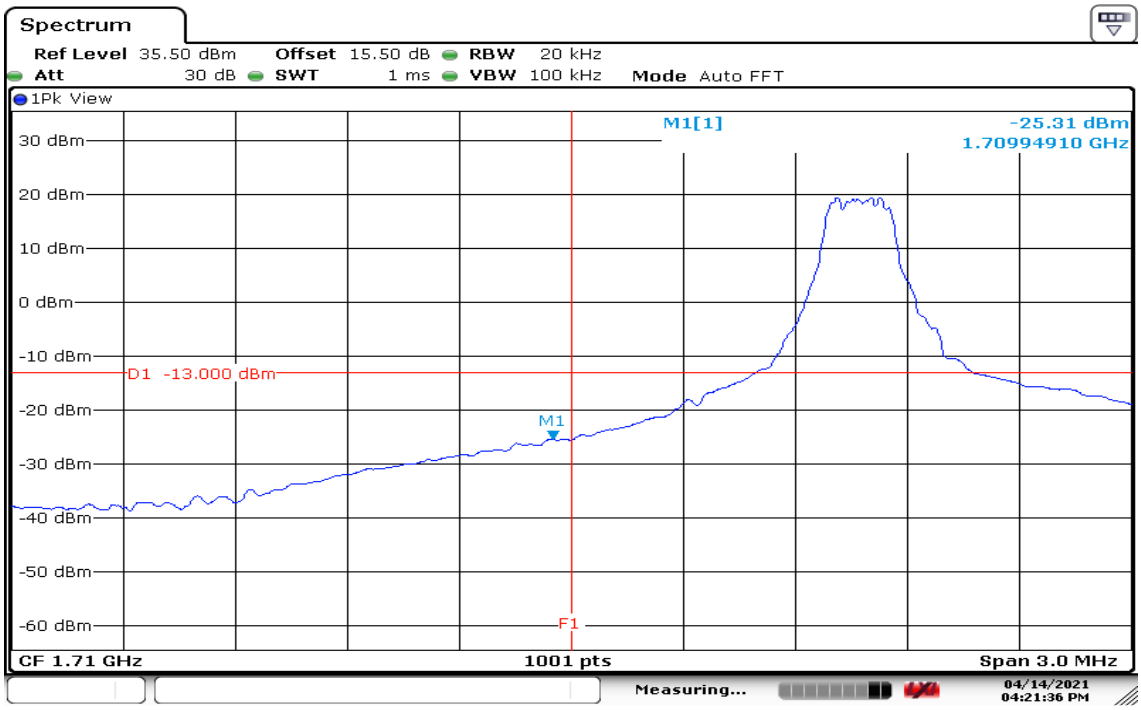

Date: 14.APR.2021 16:21:36

HIGHER BAND EDGE

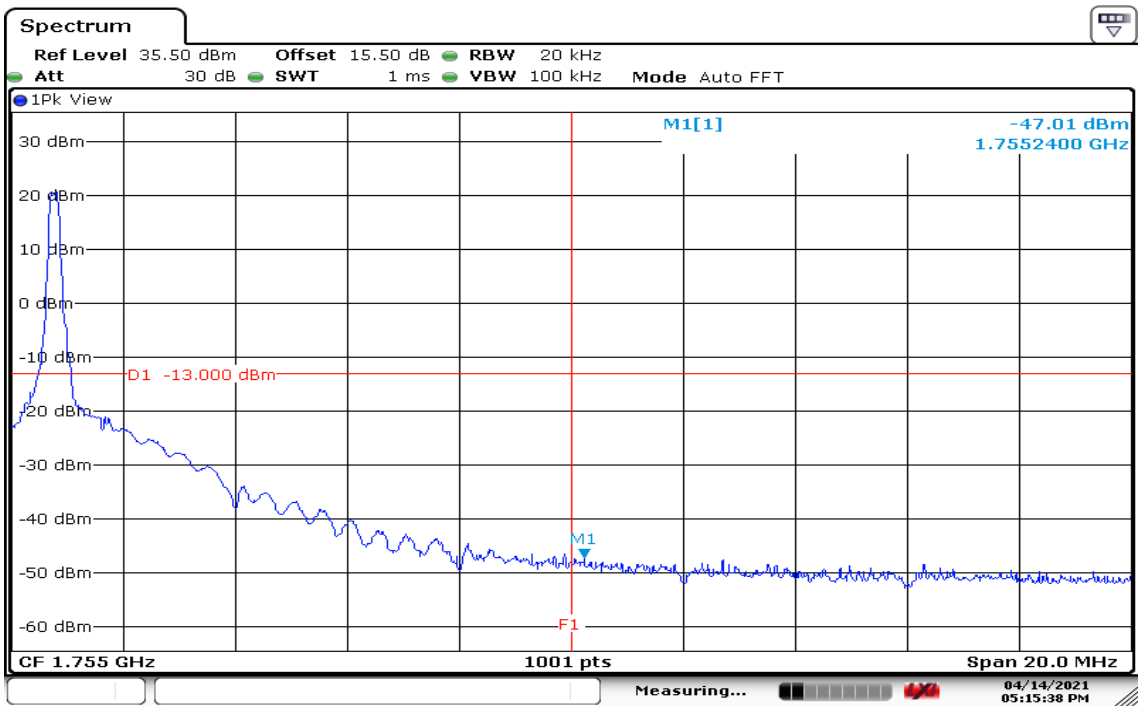

Date: 14.APR.2021 17:15:39

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CHANNEL BANDWIDTH: 15MHz / QPSK / 1RB ALLOCATION

LOWER BAND EDGE

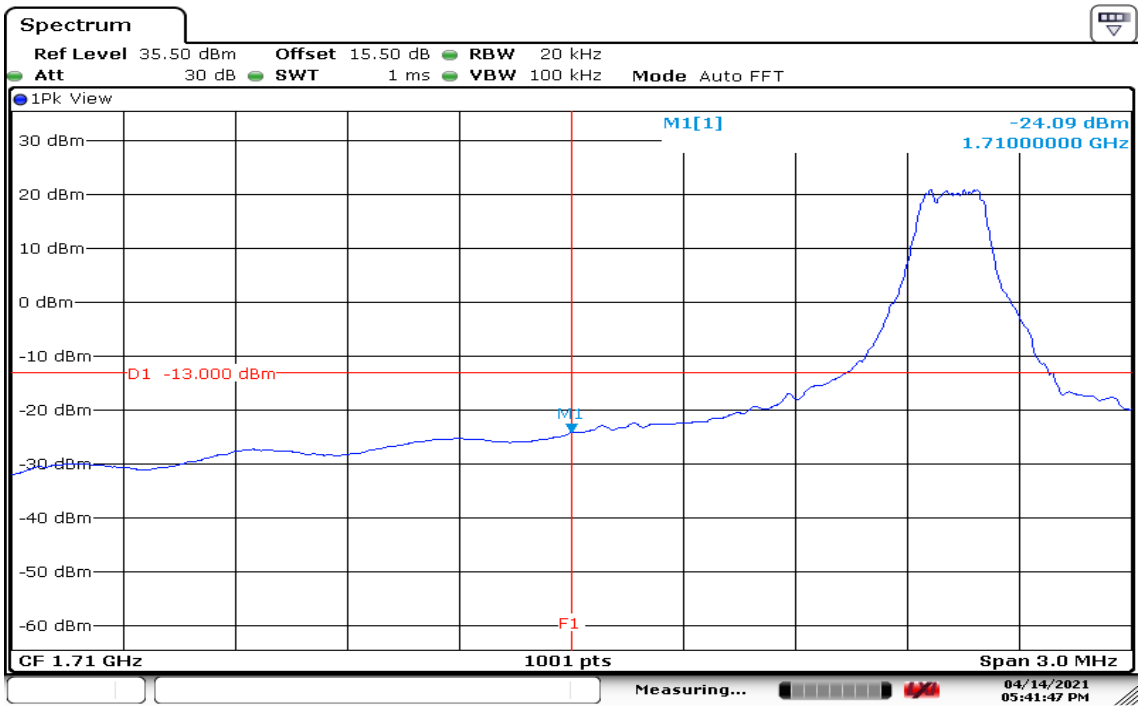

Date: 14.APR.2021 17:41:47

HIGHER BAND EDGE

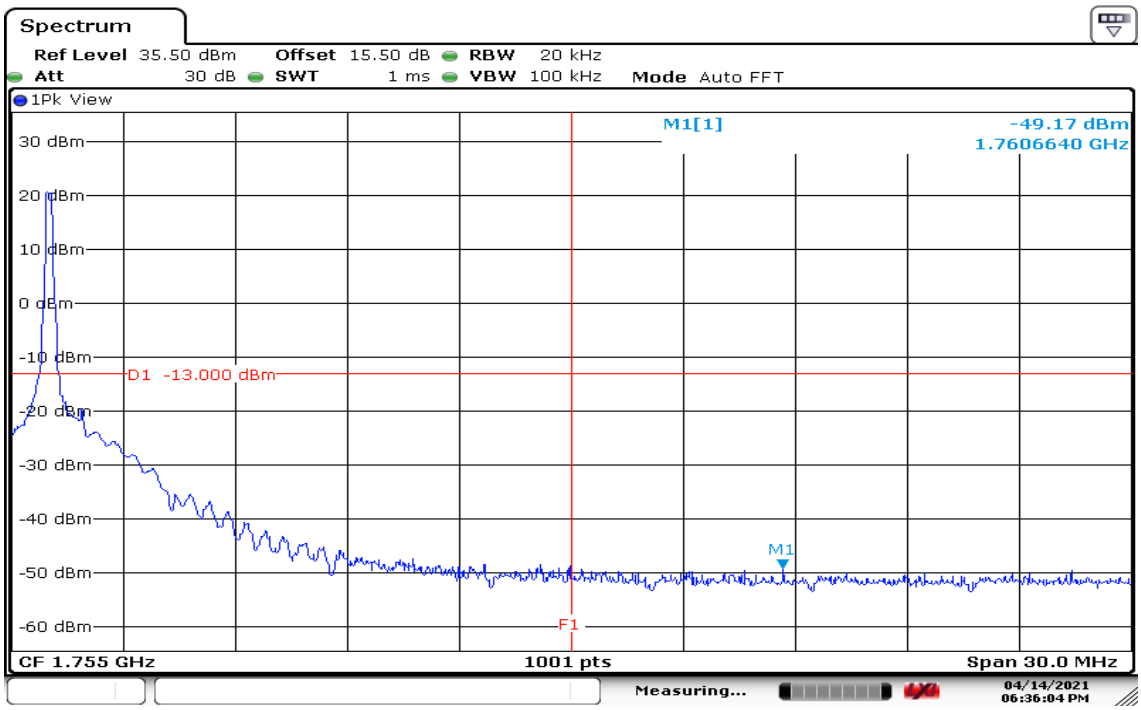

Date: 14.APR.2021 18:36:05

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CHANNEL BANDWIDTH: 20MHz / QPSK / 1RB ALLOCATION

LOWER BAND EDGE

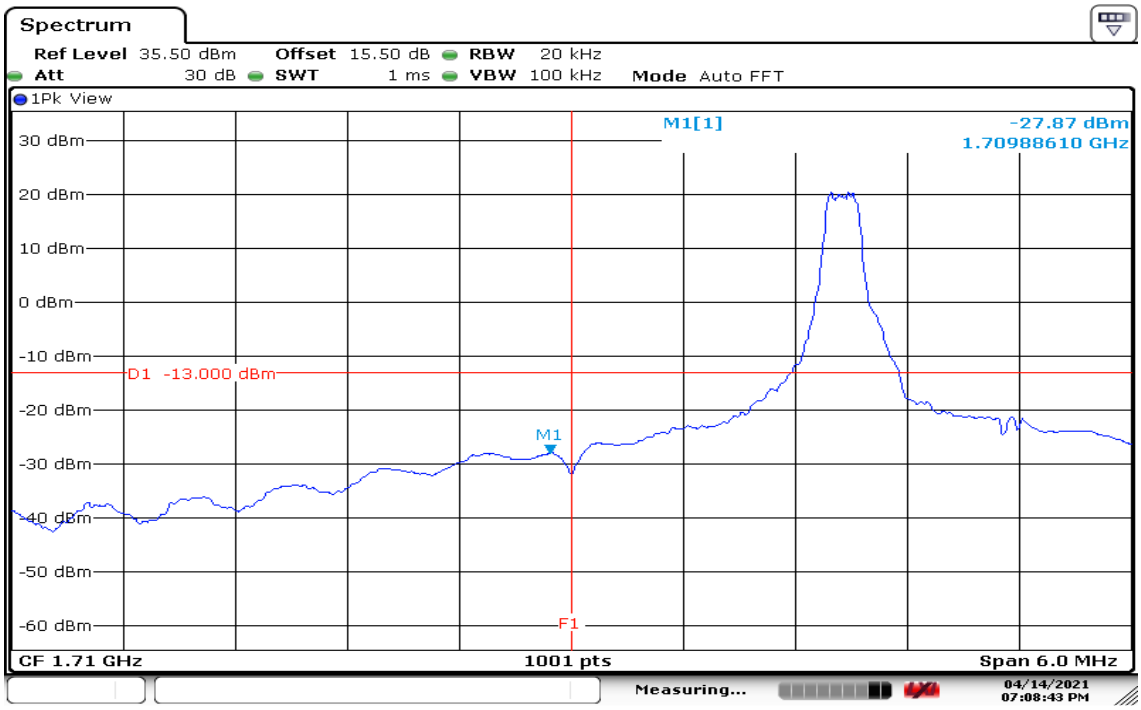

Date: 14.APR.2021 19:08:44

HIGHER BAND EDGE

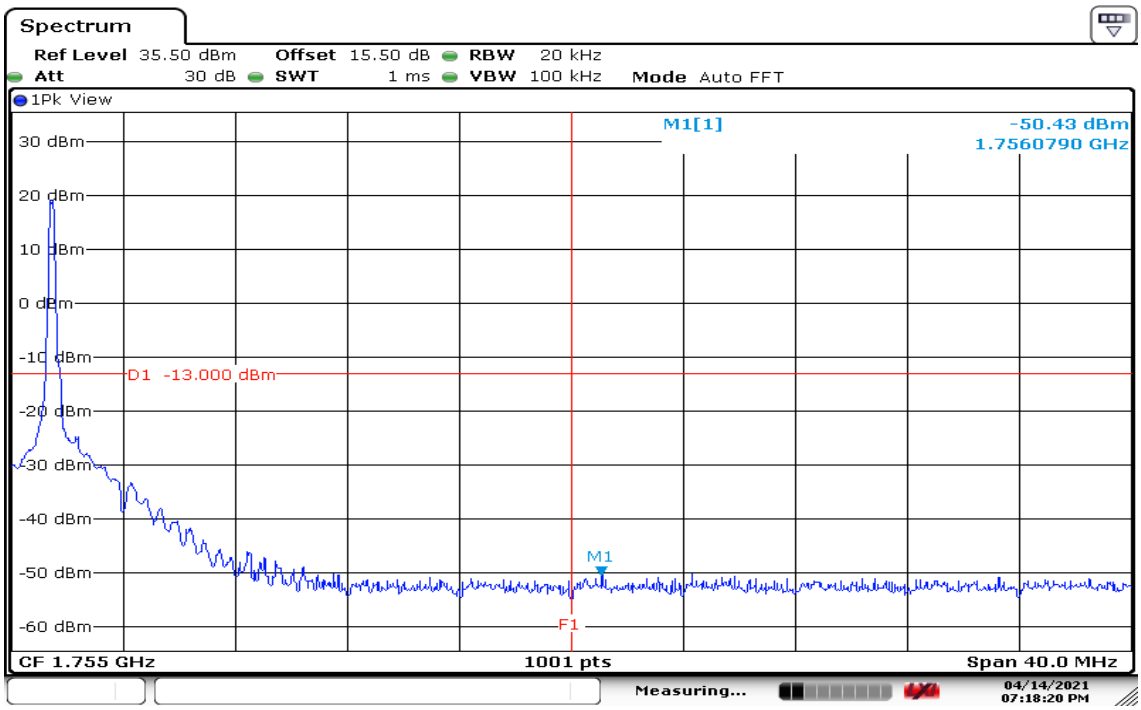

Date: 14.APR.2021 19:18:21

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CHANNEL BANDWIDTH: 1.4MHz / QPSK / FULLRB ALLOCATION

LOWER BAND EDGE

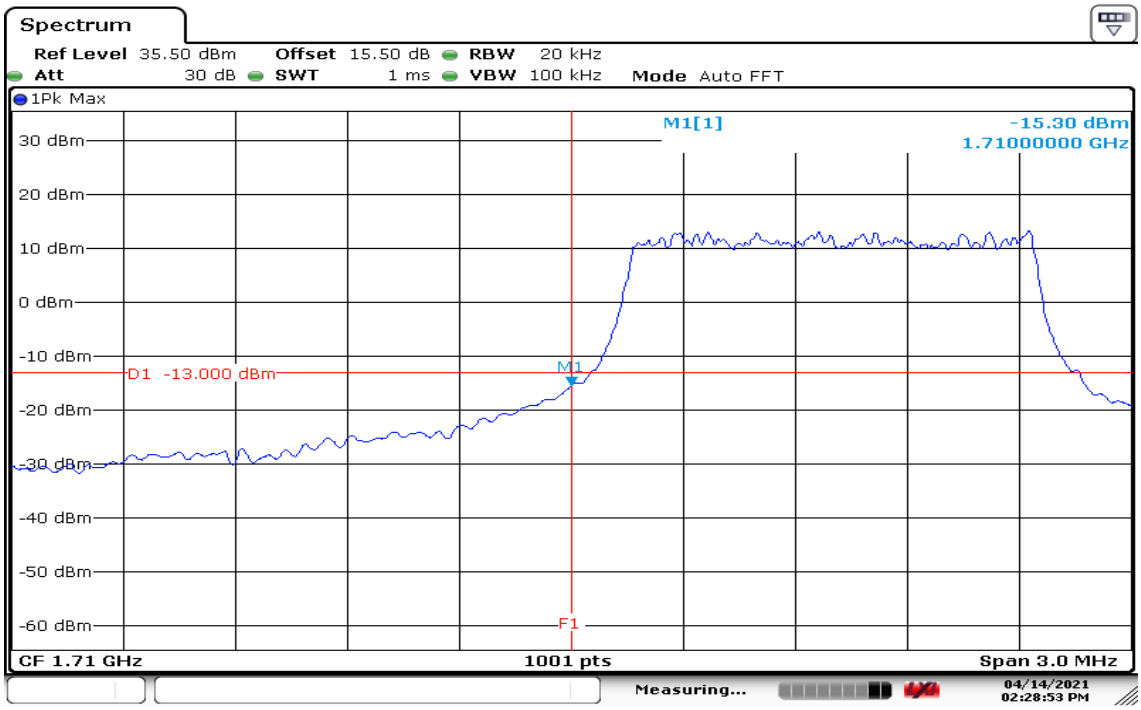

Date: 14.APR.2021 14:28:53

HIGHER BAND EDGE

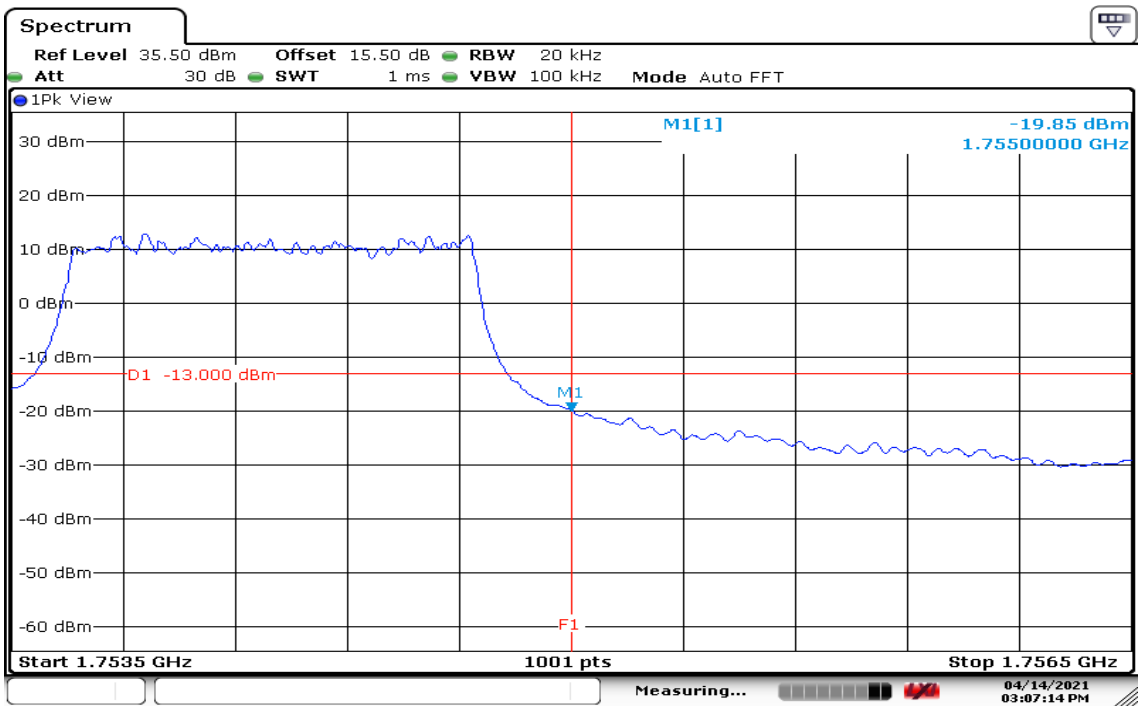

Date: 14.APR.2021 15:07:14

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CHANNEL BANDWIDTH: 3MHz / QPSK / FULLRB ALLOCATION

LOWER BAND EDGE

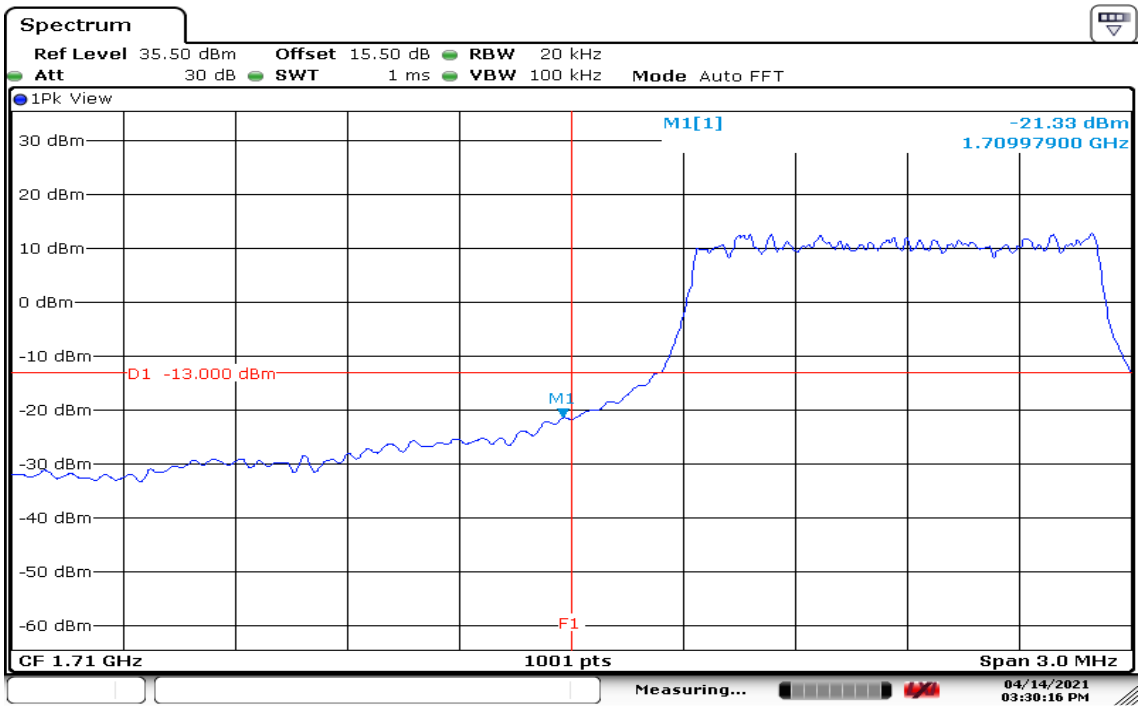

Date: 14.APR.2021 15:30:16

HIGHER BAND EDGE

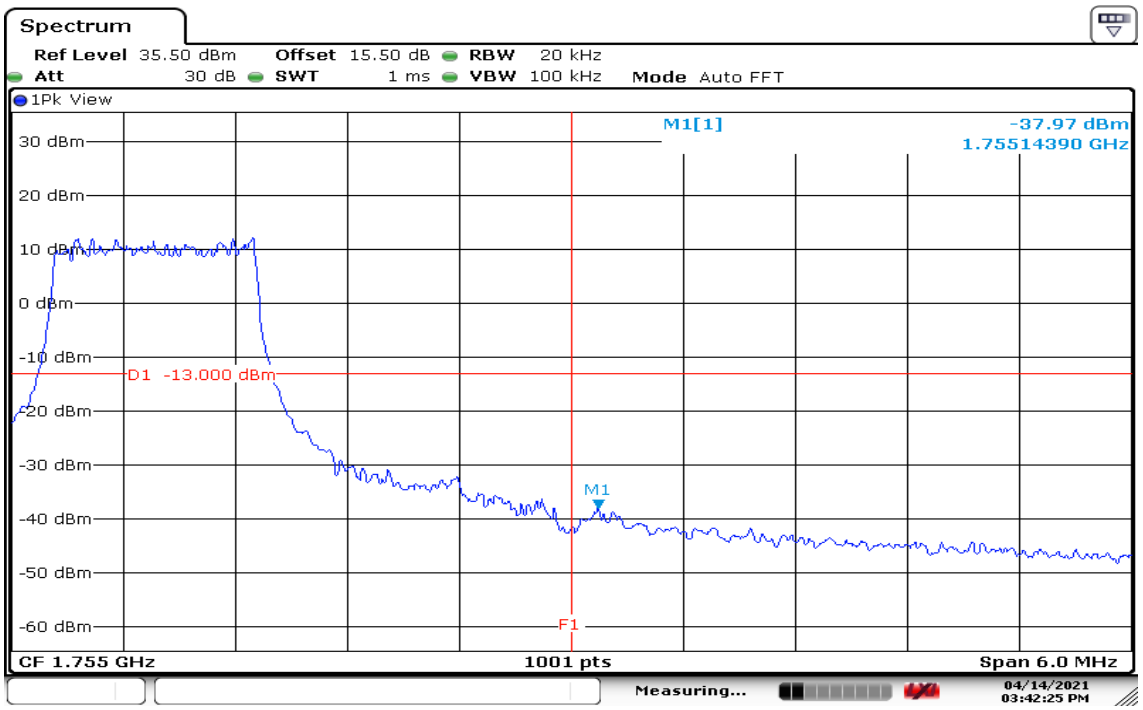

Date: 14.APR.2021 15:42:25

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CHANNEL BANDWIDTH: 5MHz / QPSK / FULLRB ALLOCATION

LOWER BAND EDGE

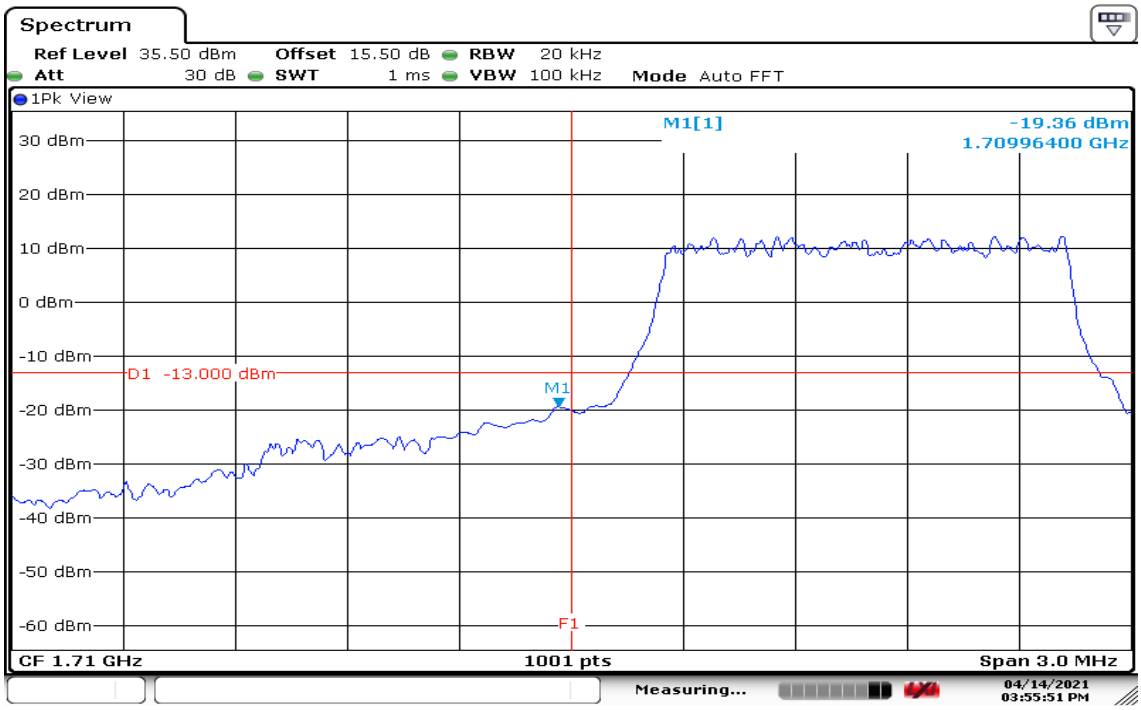

Date: 14.APR.2021 15:55:52

HIGHER BAND EDGE

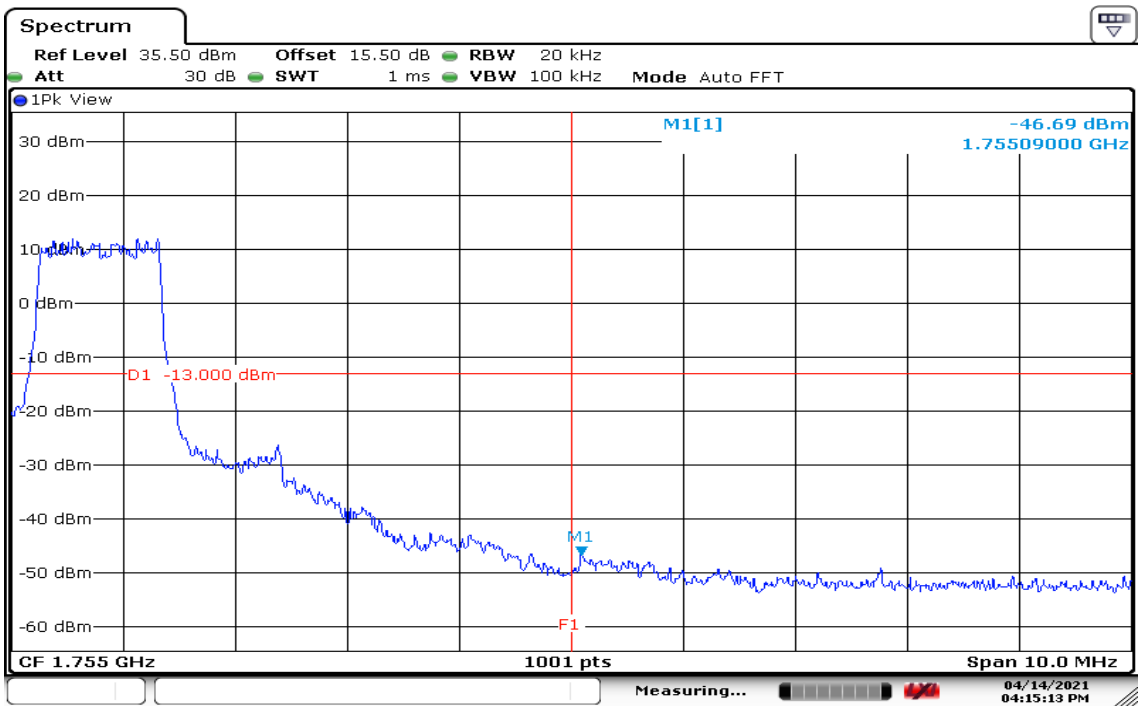

Date: 14.APR.2021 16:15:14

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CHANNEL BANDWIDTH: 10MHz / QPSK / FULLRB ALLOCATION

LOWER BAND EDGE

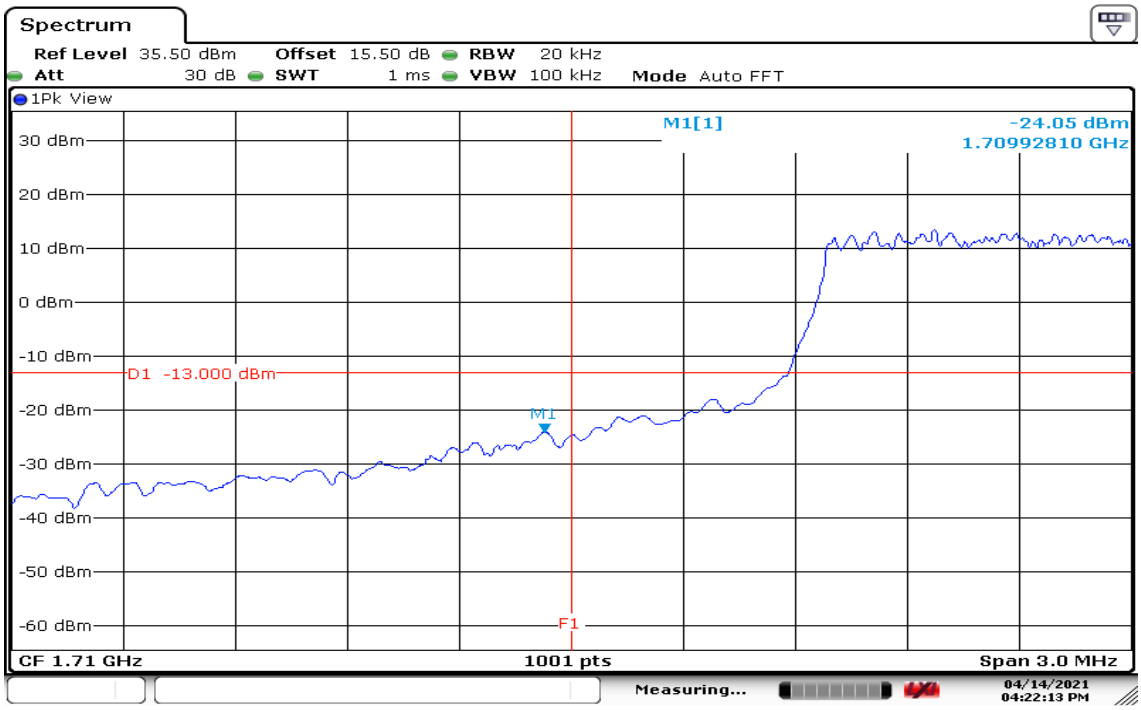

Date: 14.APR.2021 16:22:14

HIGHER BAND EDGE

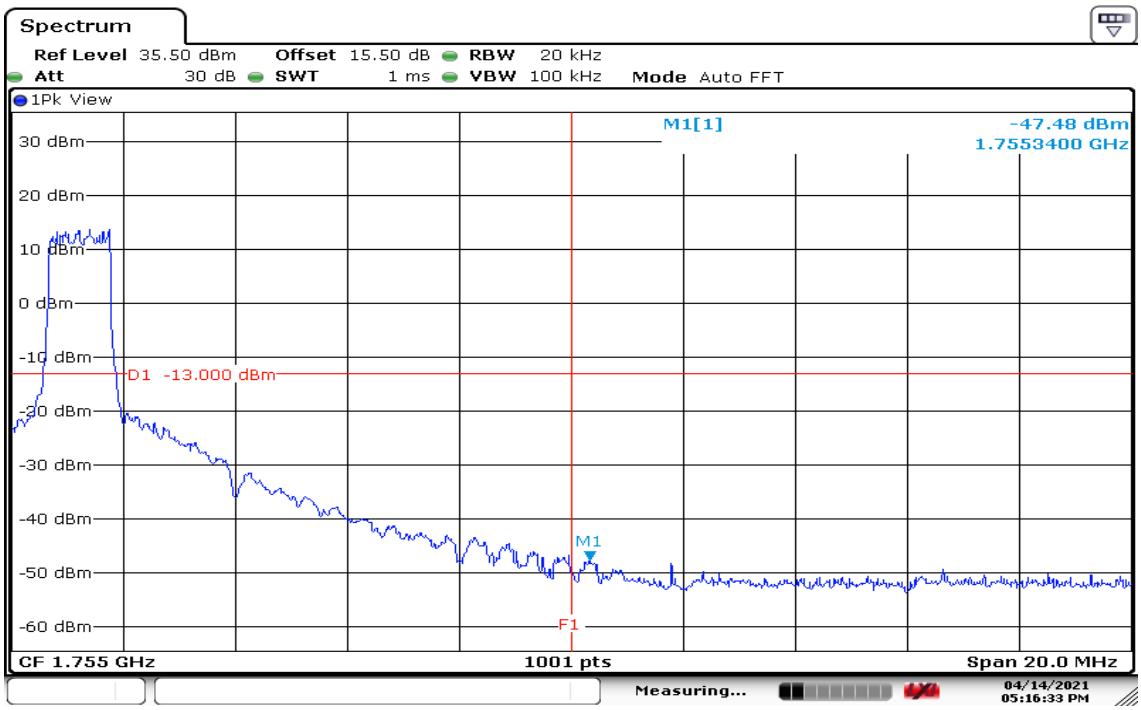

Date: 14.APR.2021 17:16:33

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CHANNEL BANDWIDTH: 15MHz / QPSK / FULLRB ALLOCATION

LOWER BAND EDGE

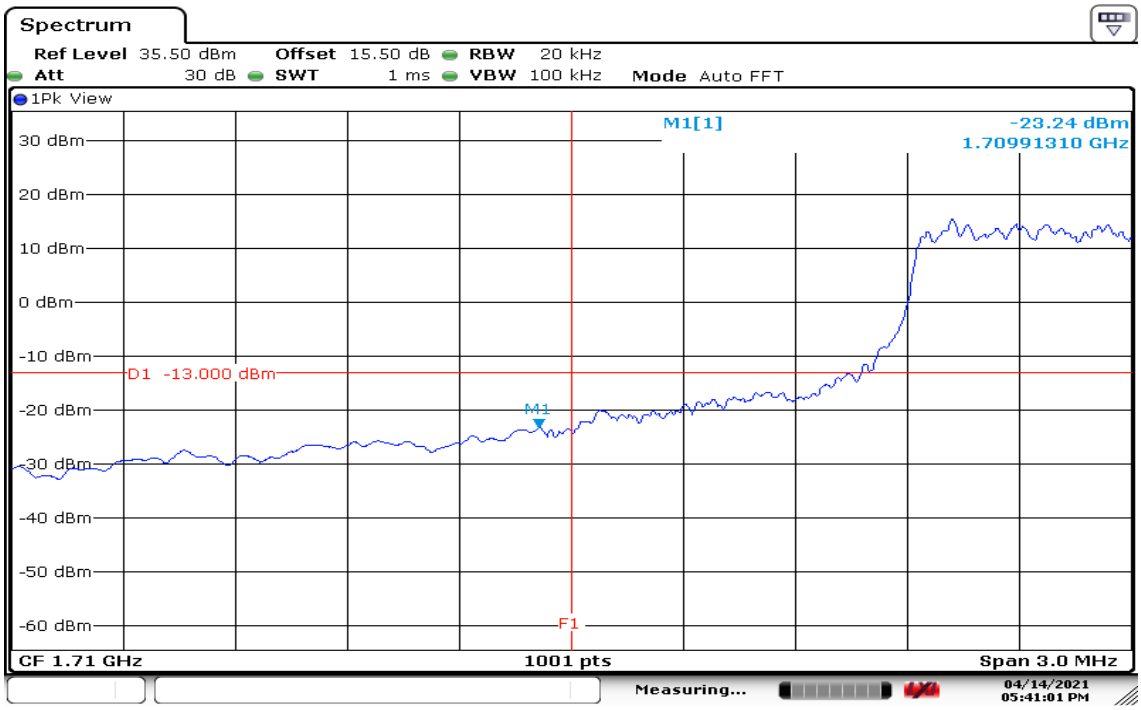

Date: 14.APR.2021 17:41:02

HIGHER BAND EDGE

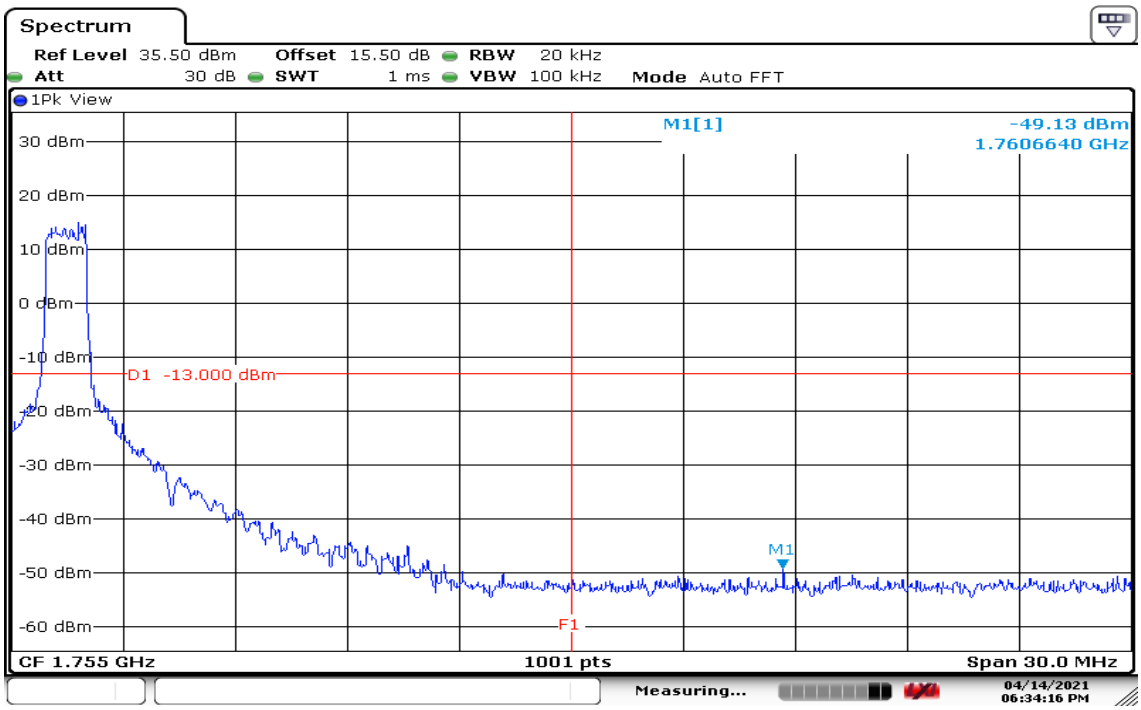

Date: 14.APR.2021 18:34:16

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CHANNEL BANDWIDTH: 20MHz / QPSK / FULLRB ALLOCATION

LOWER BAND EDGE

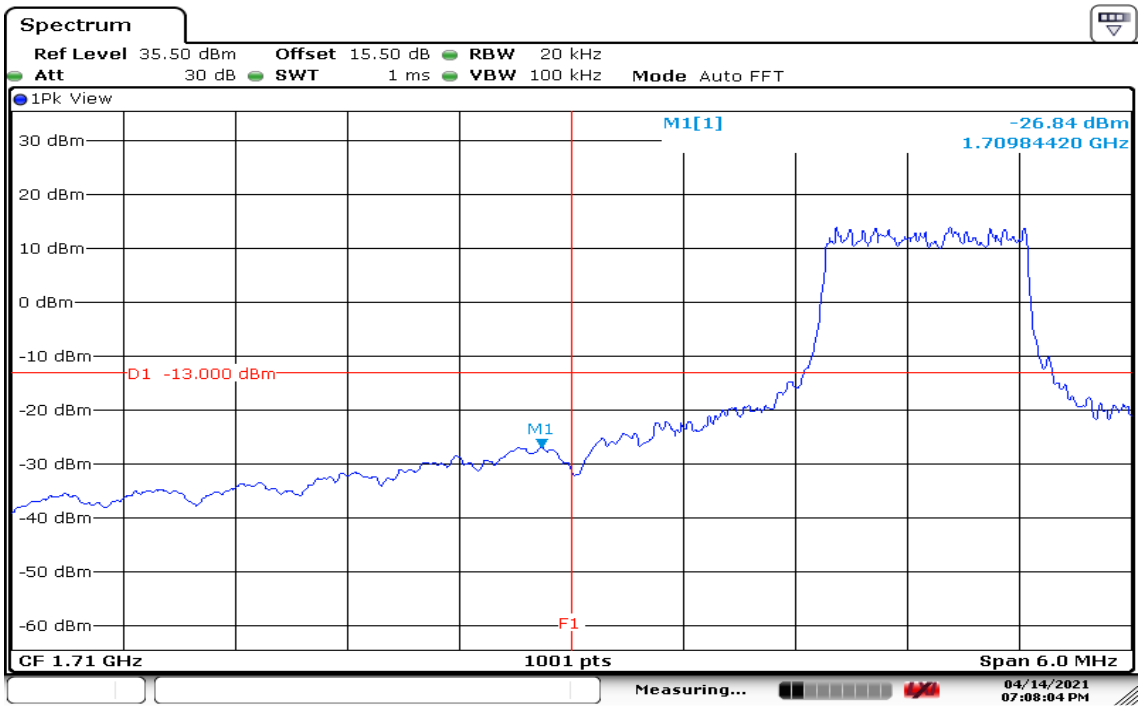

Date: 14.APR.2021 19:08:04

HIGHER BAND EDGE

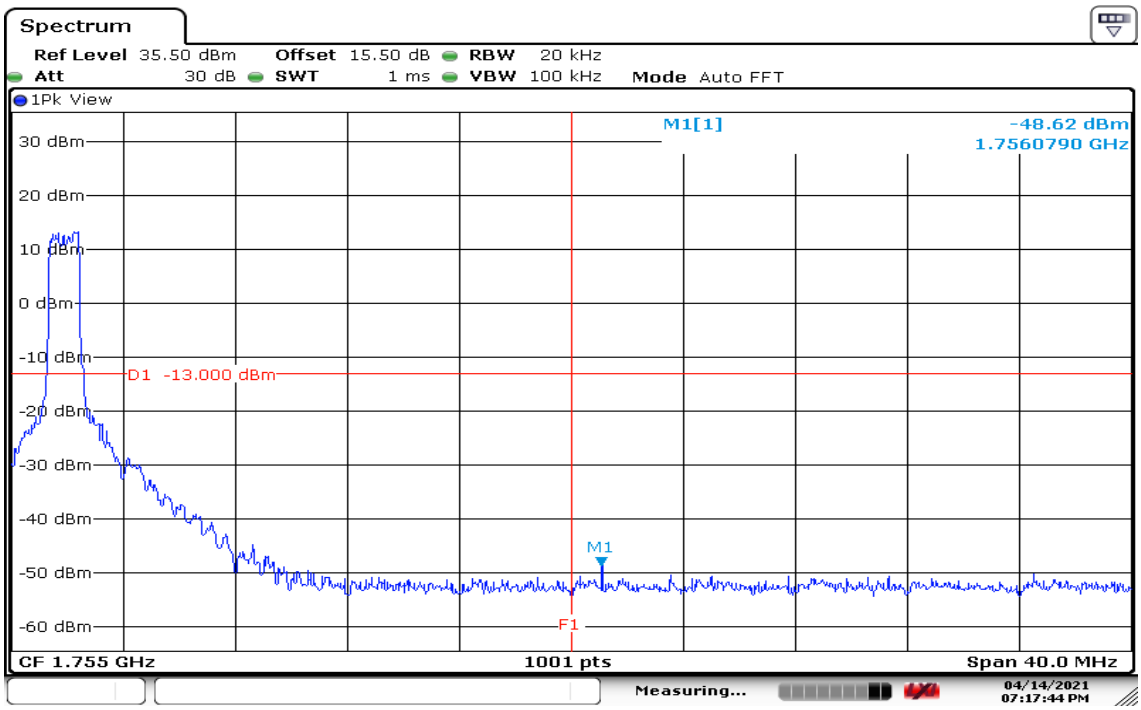

Date: 14.APR.2021 19:17:44

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

8.6 CONDUCTED SPURIOUS EMISSIONS

LIMITS

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least 43 +10 log10(P) dB. The limit of emission equal to –13dBm

TEST PROCEDURES

1. According to KDB 971168D01, photograph 6.0
2. The EUT was connect to spectrum analyzer and call box.
3. The RF output of EUT was connected to the spectrum analyzer.
4. Set the spectrum analyzer , RBW=1MHz, VBW=3MHz.
5. Record the maximum spurious emission.
6. The fundamental frequency should be excluded against the limit in operating band.

TEST RESULTS

Temperature:	22.7℃	**Humidity:**	54.3% RH
Tested by:	Dally Hong	**Test Date:**	March 30, 2021
Temperature:	23.1℃	**Humidity:**	52.5% RH
Tested by:	Dally Hong	**Test Date:**	April 14, 2021

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

LTE Band 4

QPSK / 1RB

CHANNEL BANDWIDTH: 1.4MHz / 30MHz-3GHz

CH Low

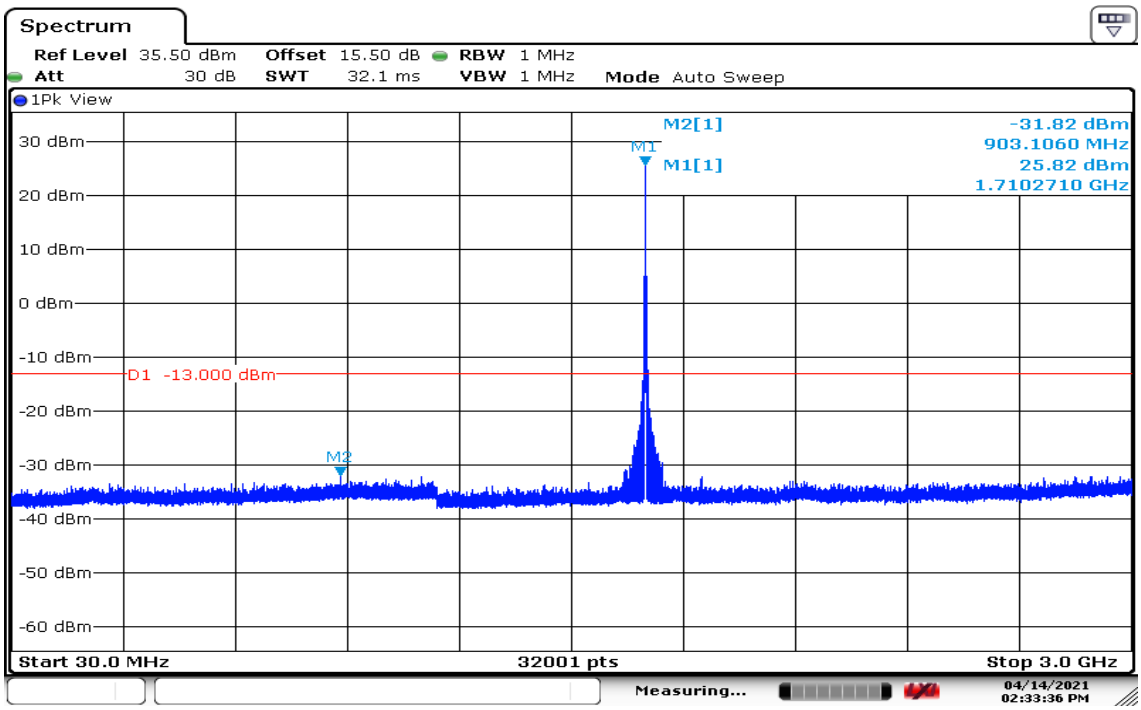

Date: 14.APR.2021 14:33:36

CH Mid

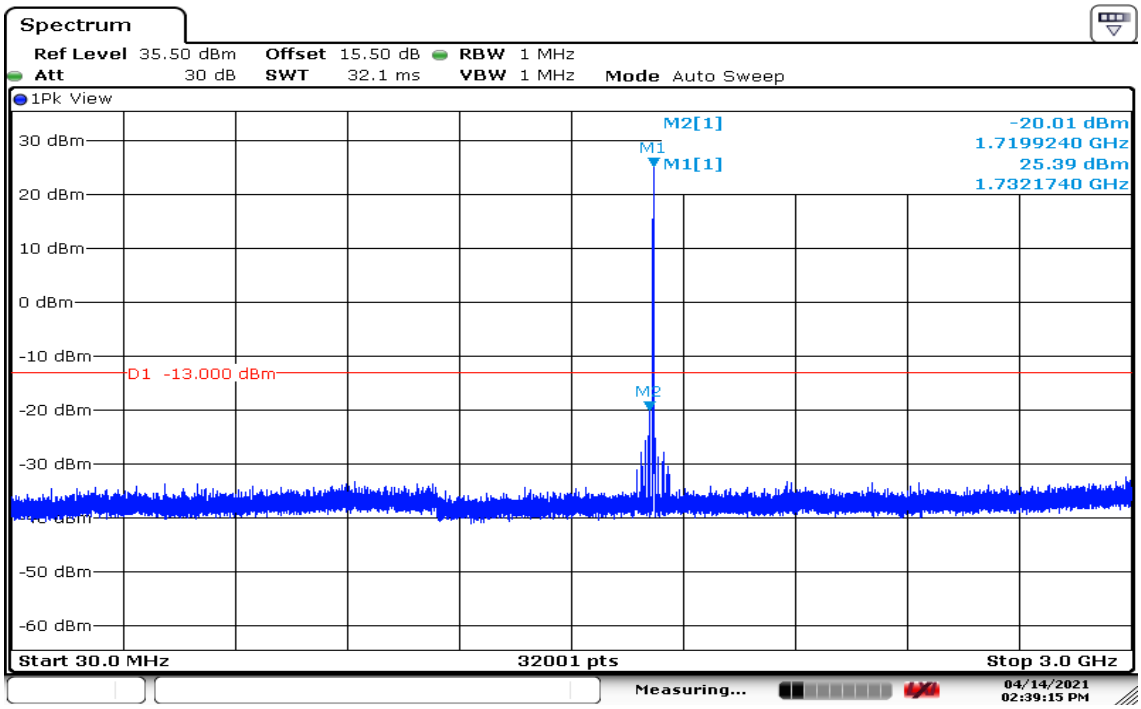

Date: 14.APR.2021 14:39:15

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

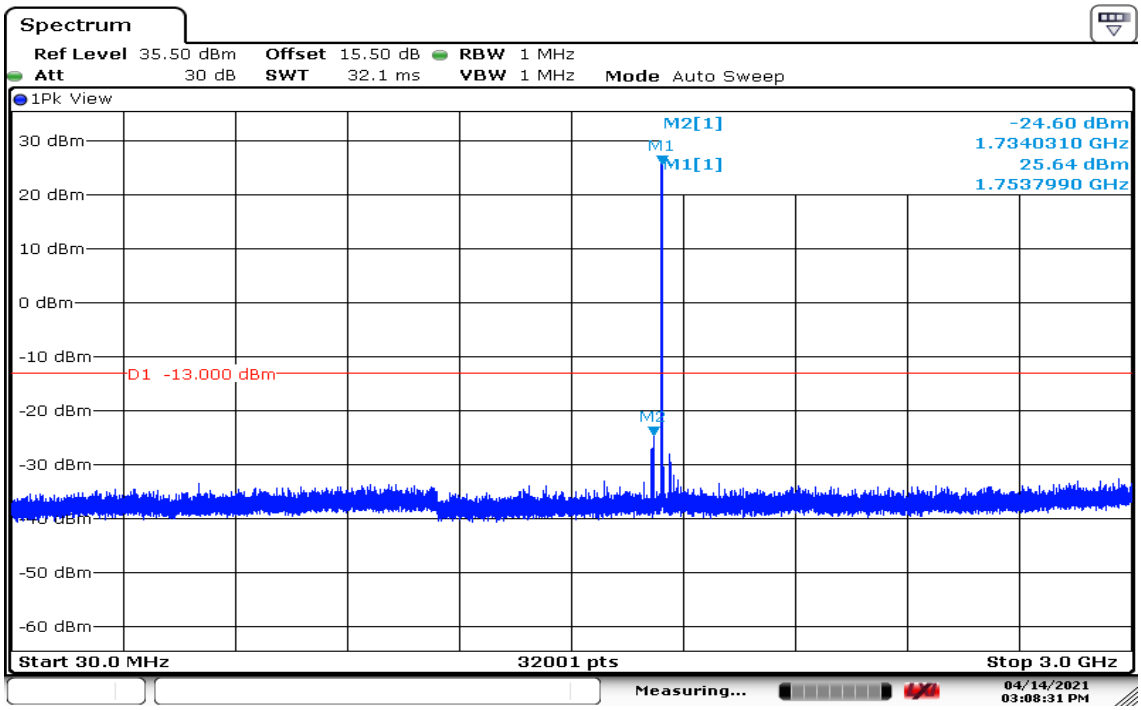

Date: 14.APR.2021 15:08:31

CHANNEL BANDWIDTH: 1.4MHz / 3GHz-20GHz

CH Low

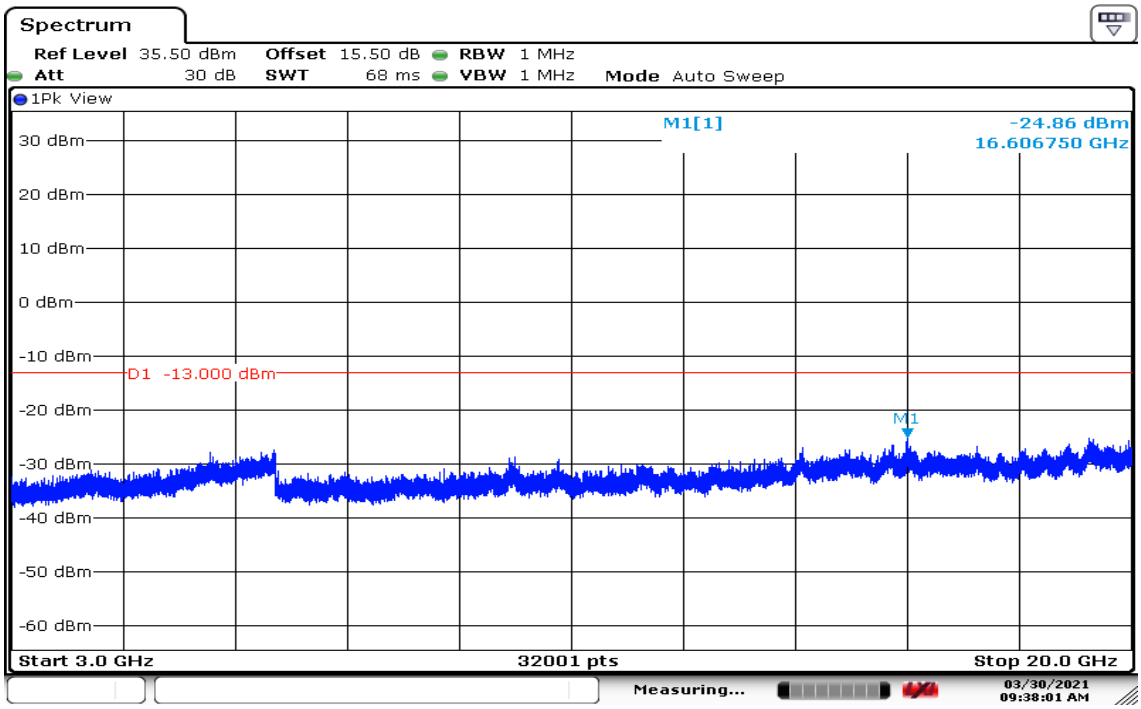

Date: 30.MAR.2021 09:38:02

CH Mid

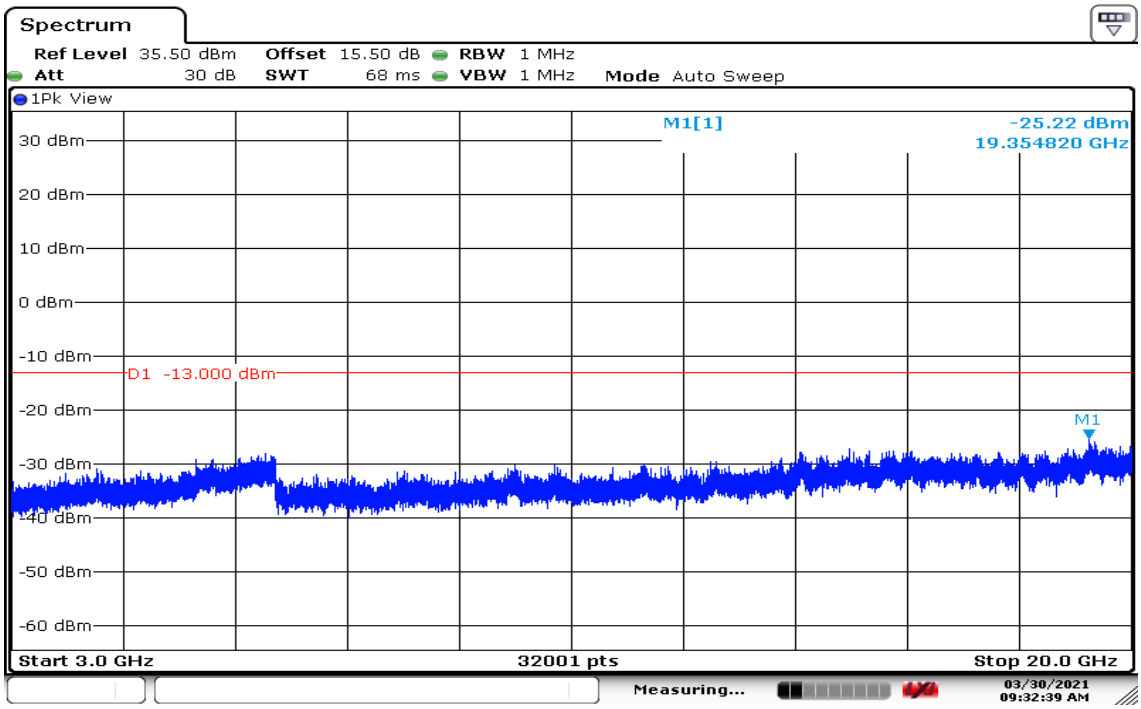

Date: 30.MAR.2021 09:32:39

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

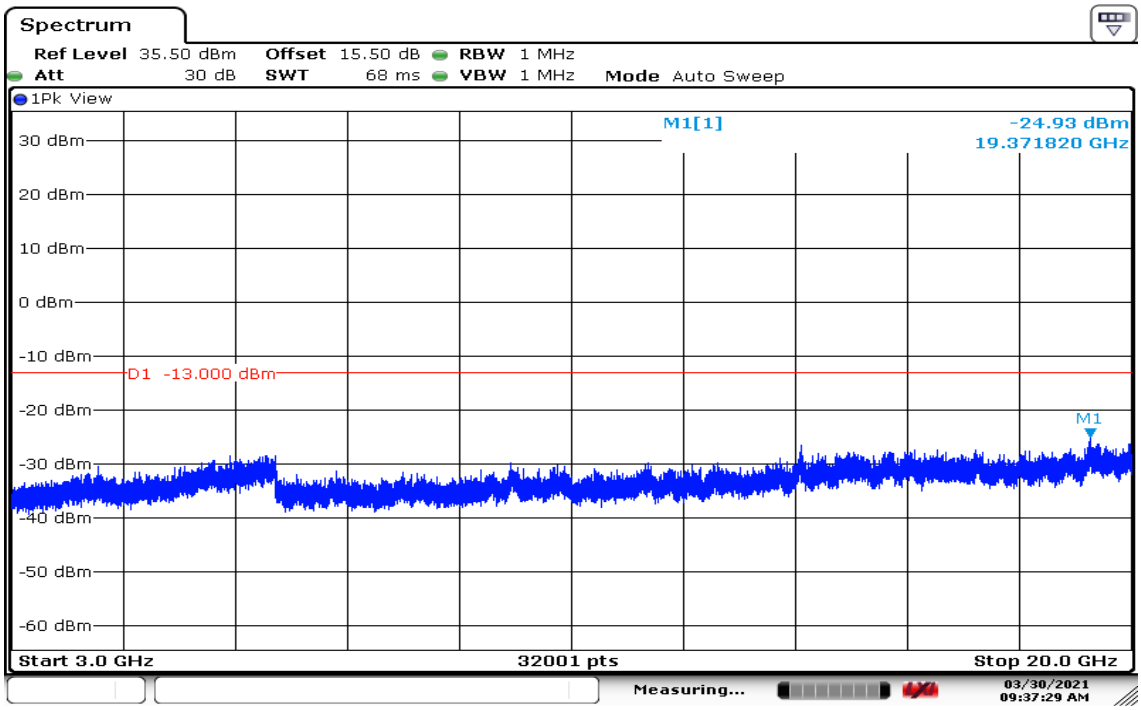

Date: 30.MAR.2021 09:37:29

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CHANNEL BANDWIDTH: 3MHz / 30MHz-3GHz

CH Low

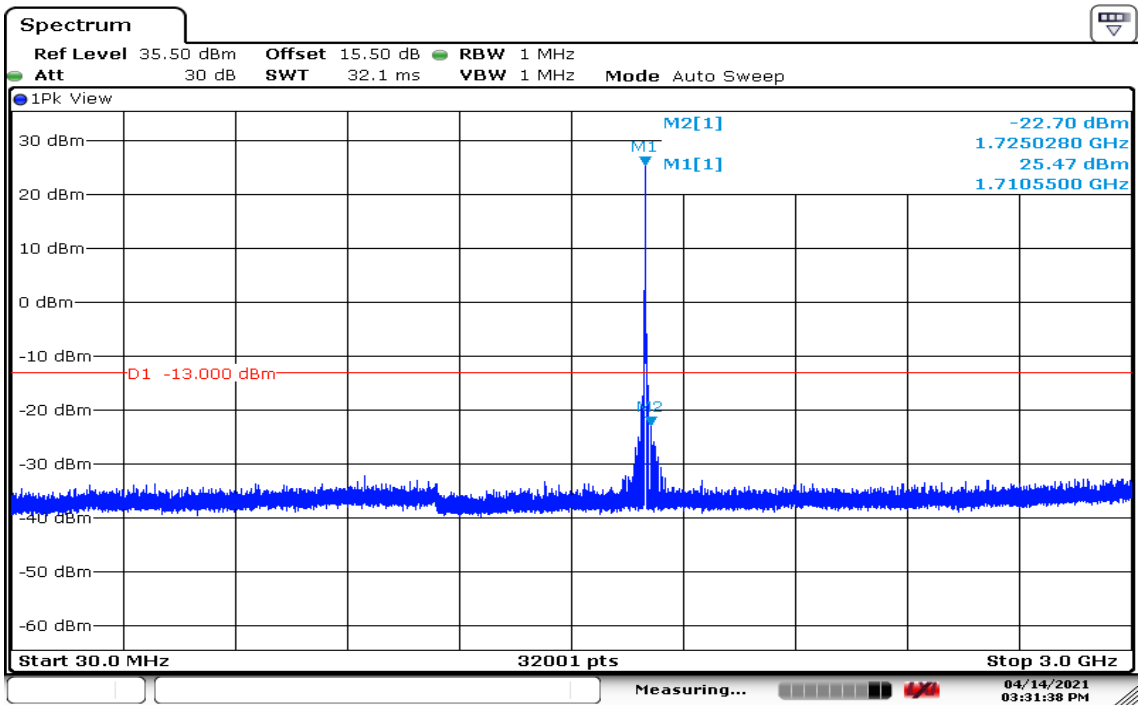

Date: 14.APR.2021 15:31:39

CH Mid

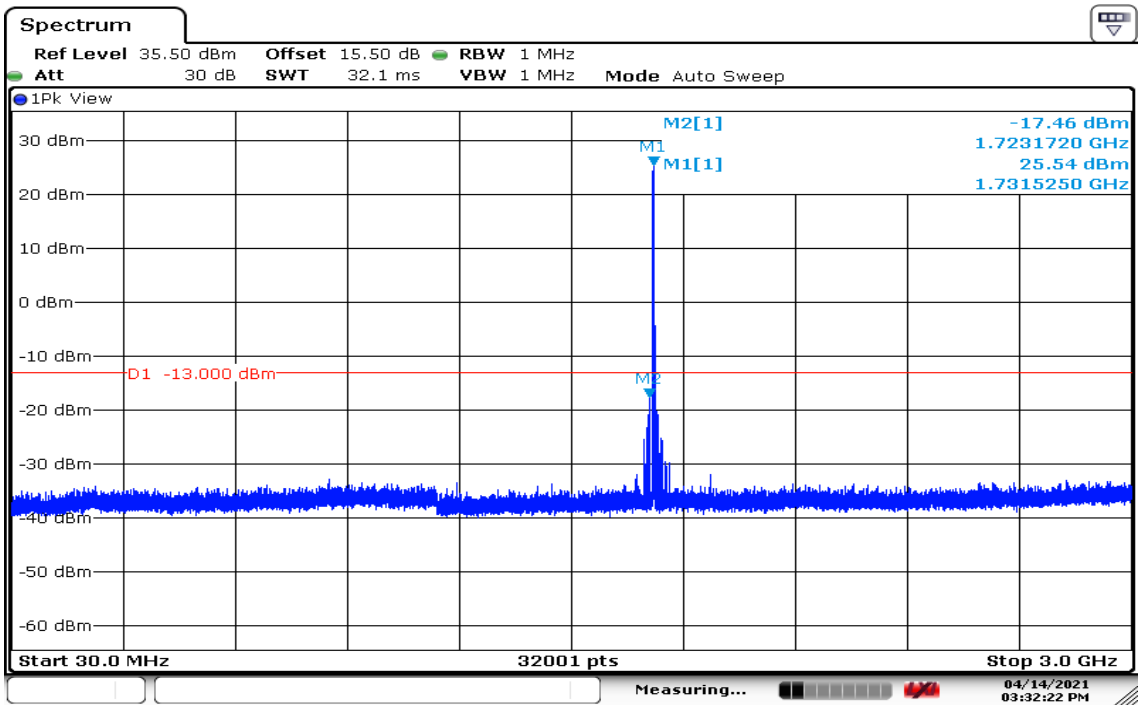

Date: 14.APR.2021 15:32:22

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

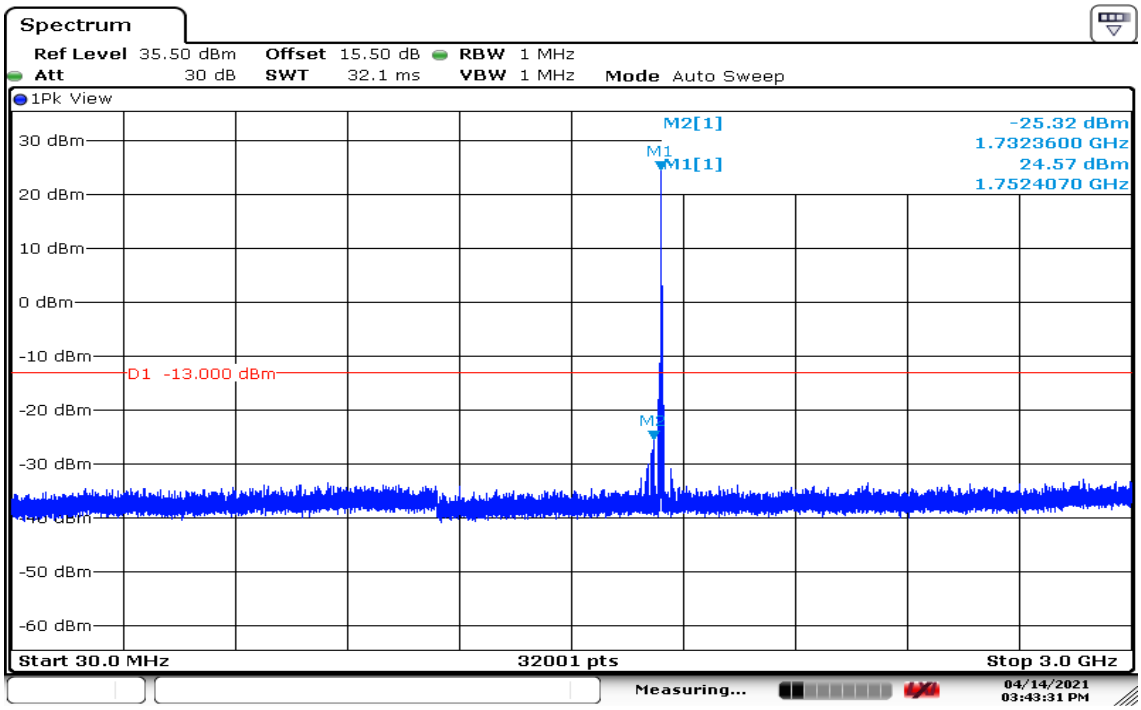

Date: 14.APR.2021 15:43:32

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CHANNEL BANDWIDTH: 3MHz / 3GHz-20GHz

CH Low

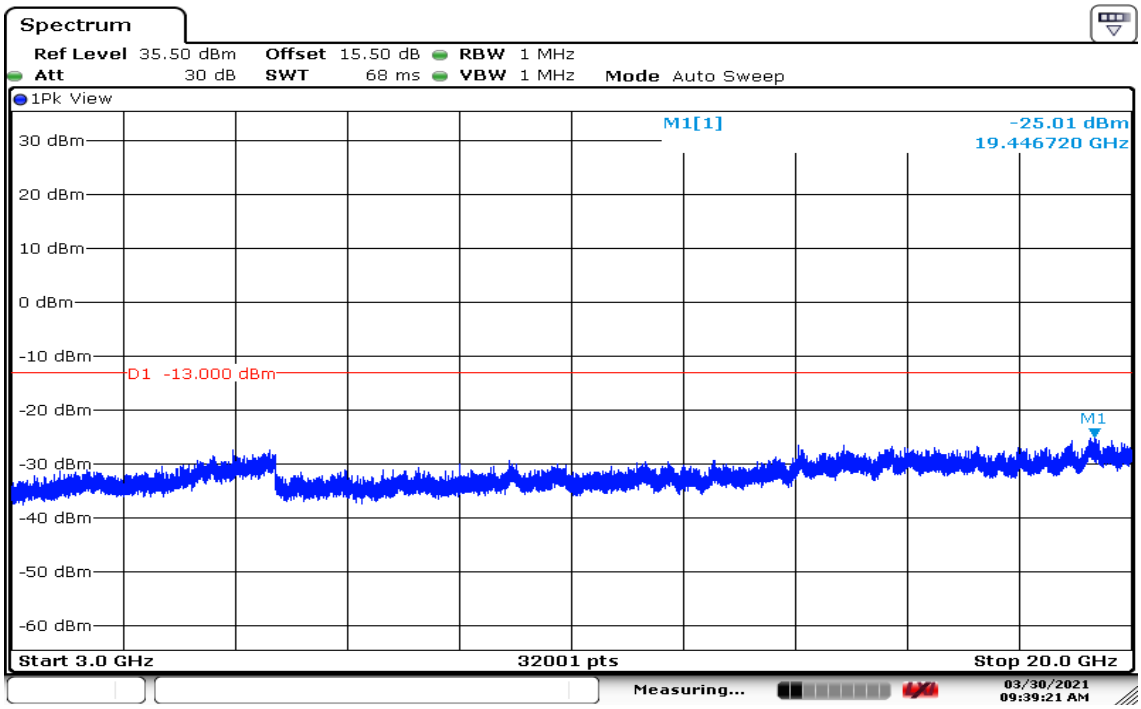

Date: 30 MAR 2021 09:39:22

CH Mid

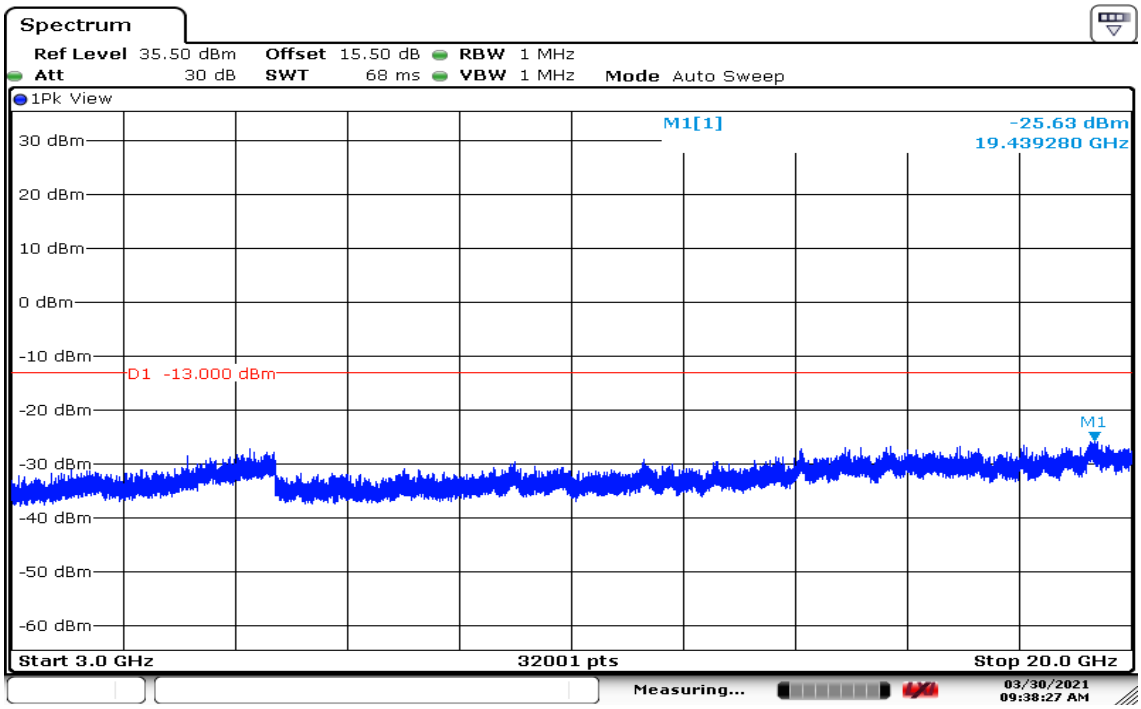

Date: 30 MAR 2021 09:38:27

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

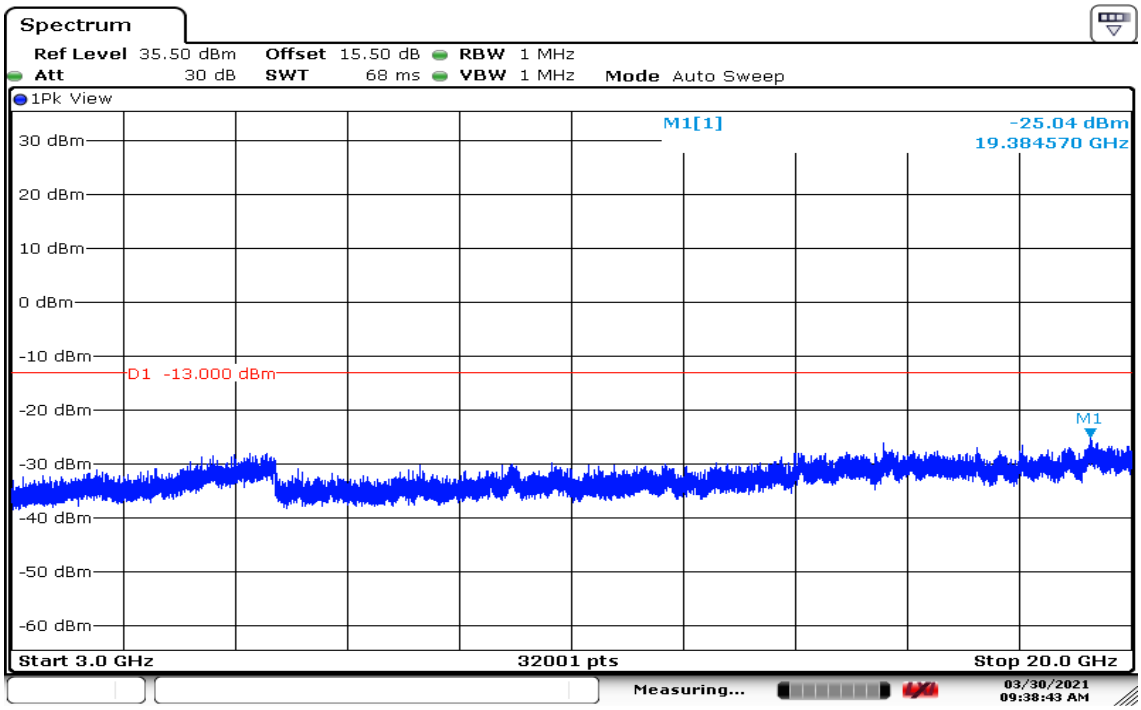

Date: 30.MAR.2021 09:38:44

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CHANNEL BANDWIDTH: 5MHz / 30MHz-3GHz

CH Low

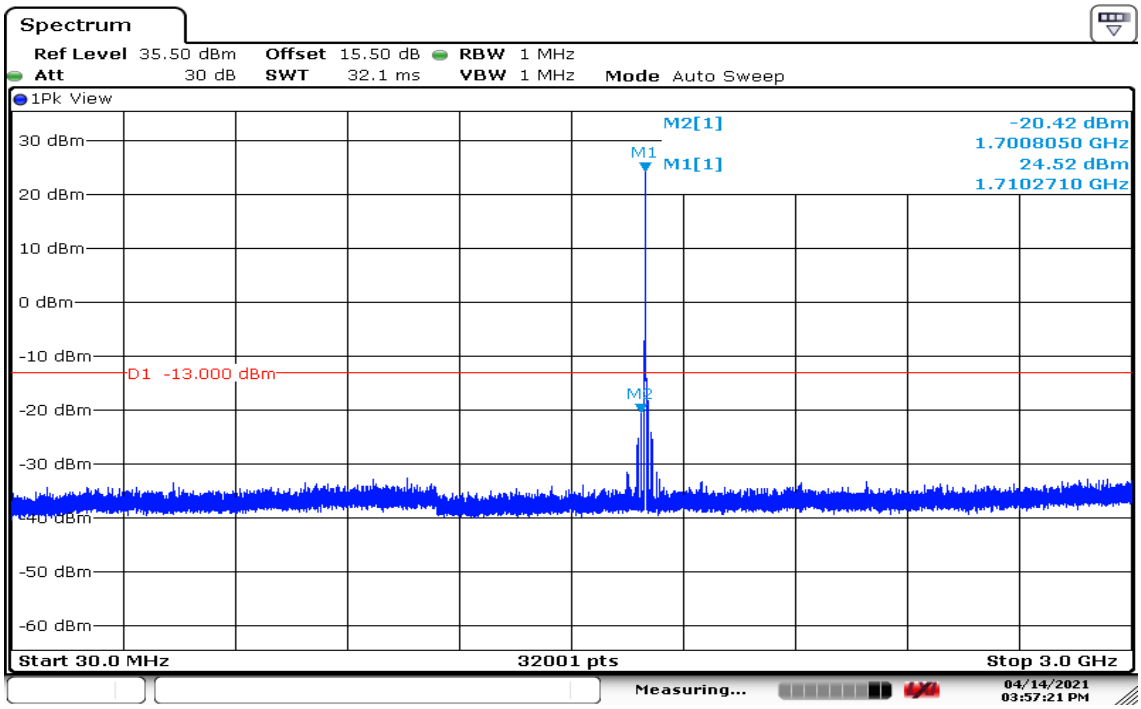

Date: 14.APR.2021 15:57:21

CH Mid

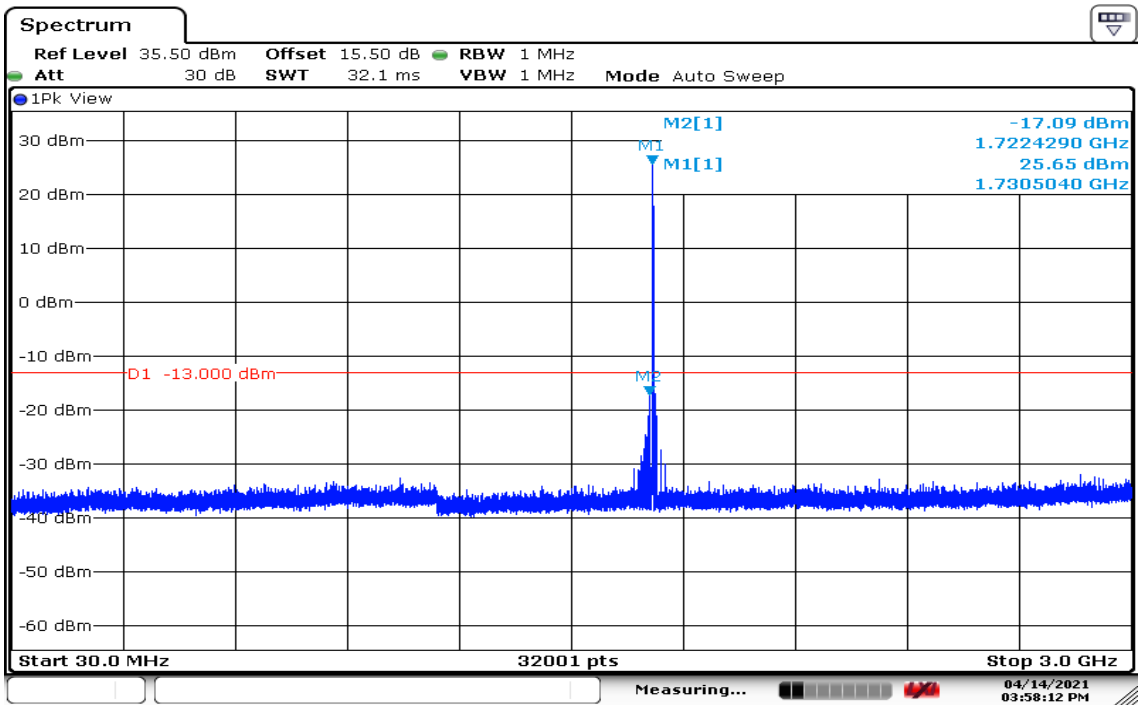

Date: 14.APR.2021 15:58:12

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

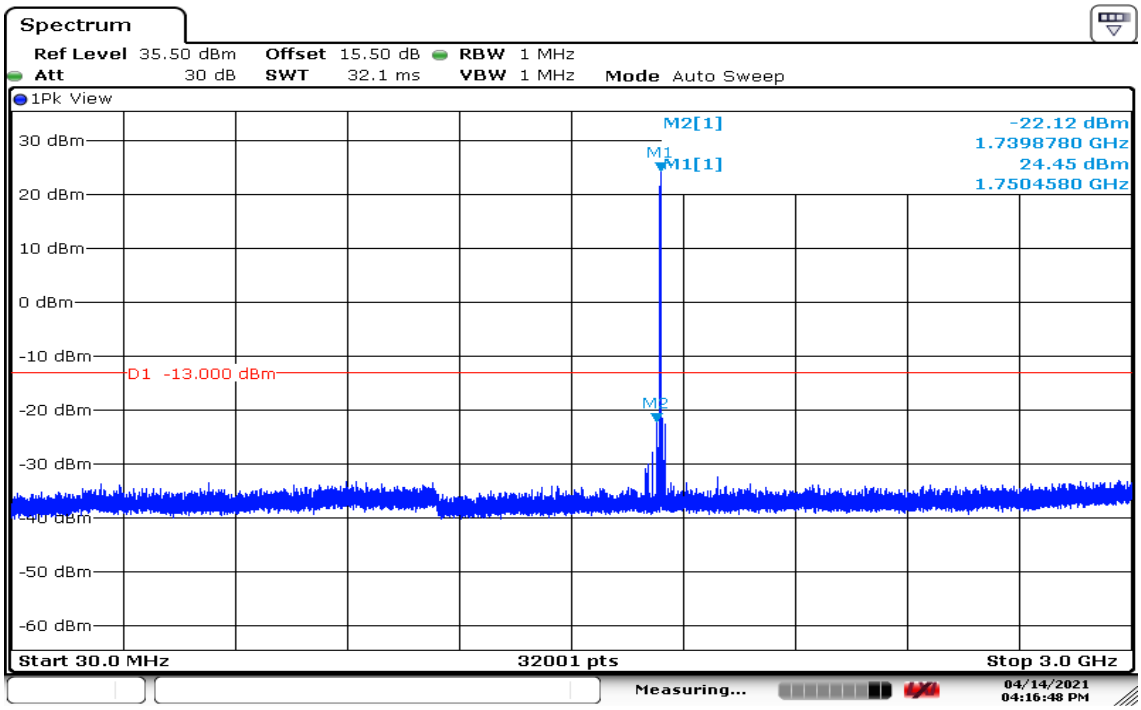

Date: 14.APR.2021 16:16:48

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CHANNEL BANDWIDTH: 5MHz / 3GHz-20GHz

CH Low

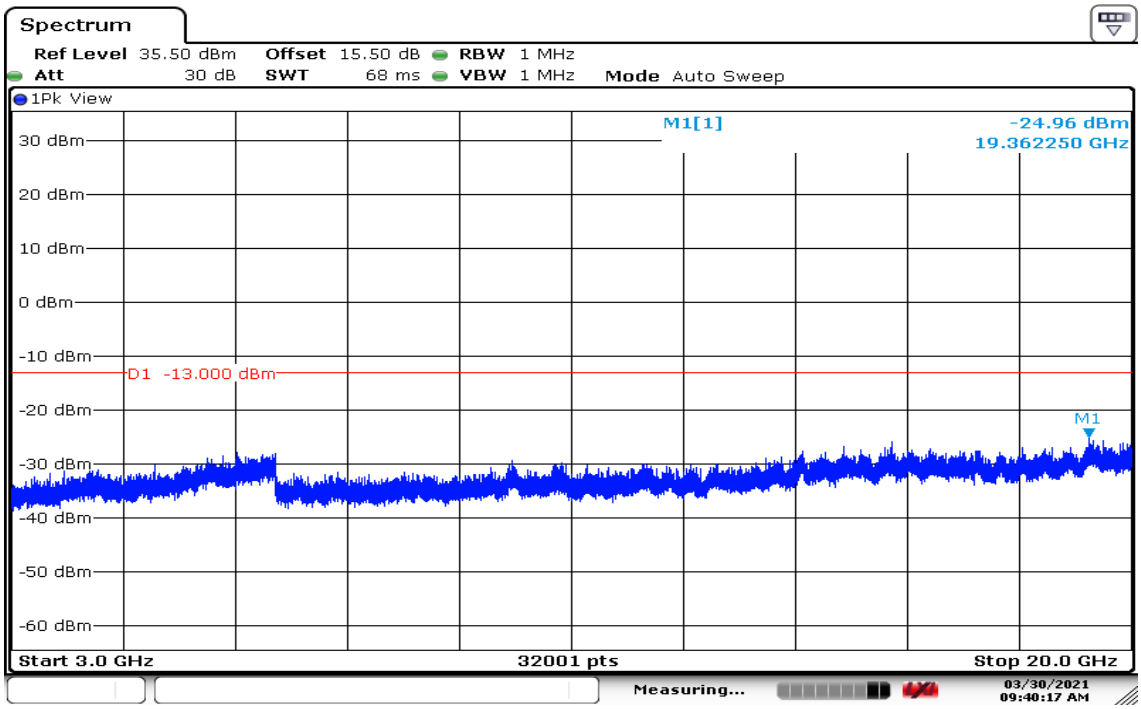

Date: 30.MAR.2021 09:40:18

CH Mid

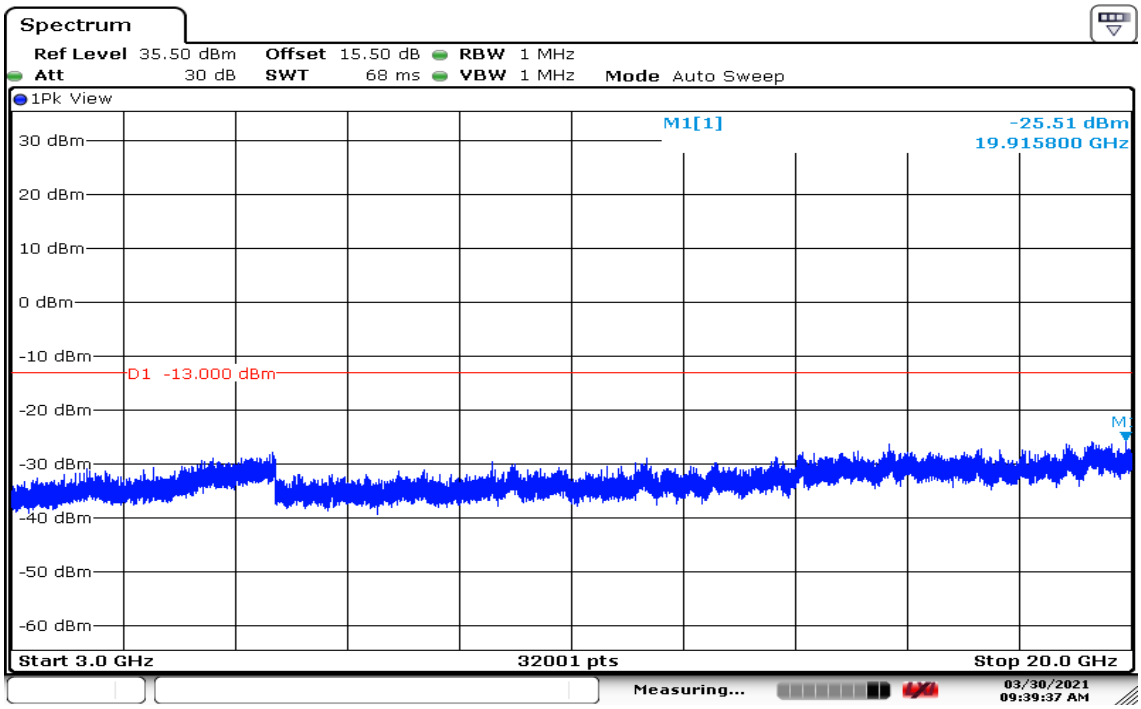

Date: 30.MAR.2021 09:39:37

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

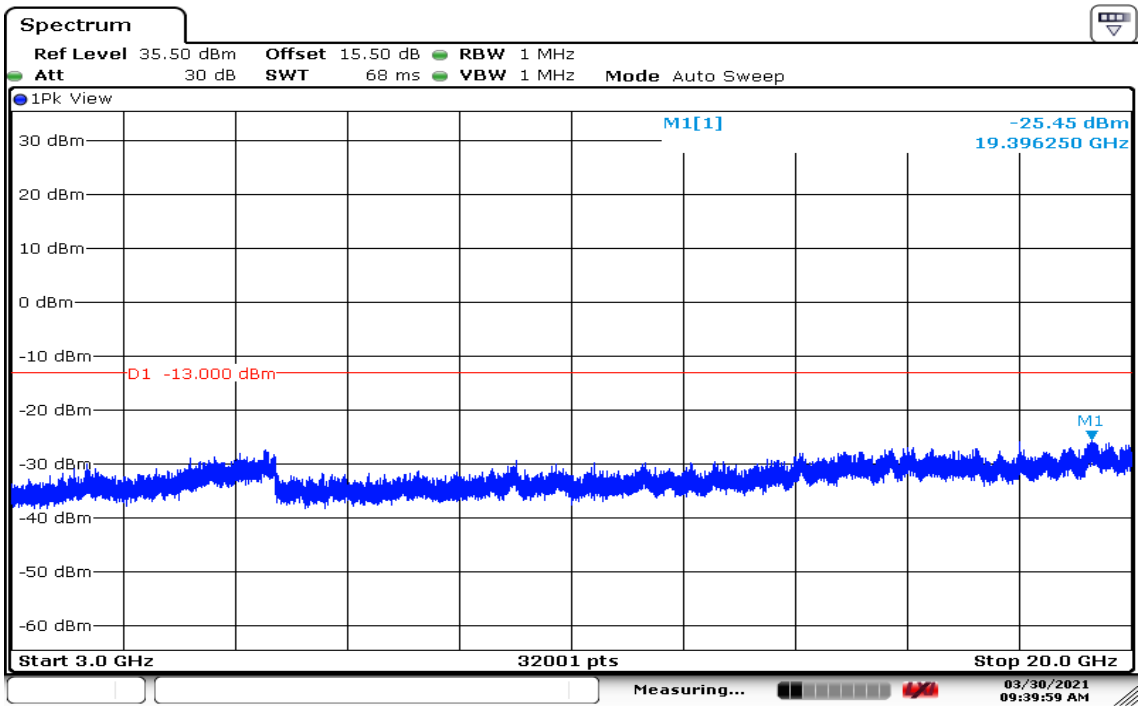

Date: 30.MAR.2021 09:39:59

CHANNEL BANDWIDTH: 10MHz / 30MHz-3GHz

CH Low

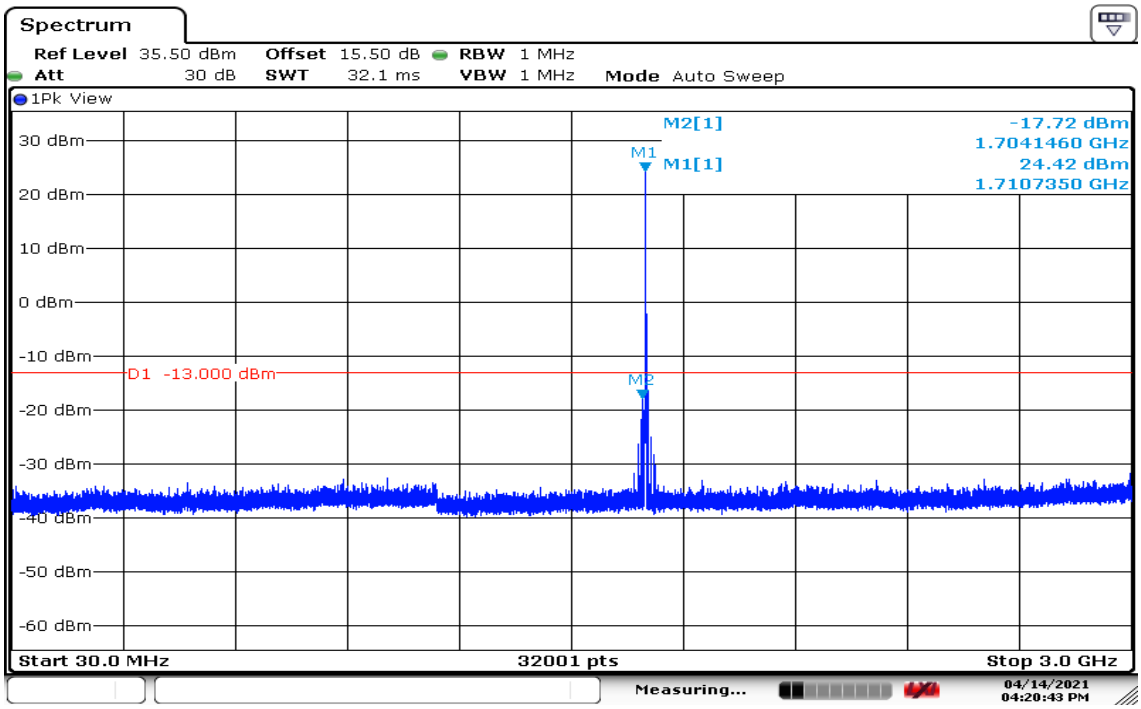

Date: 14.APR.2021 16:20:43

CH Mid

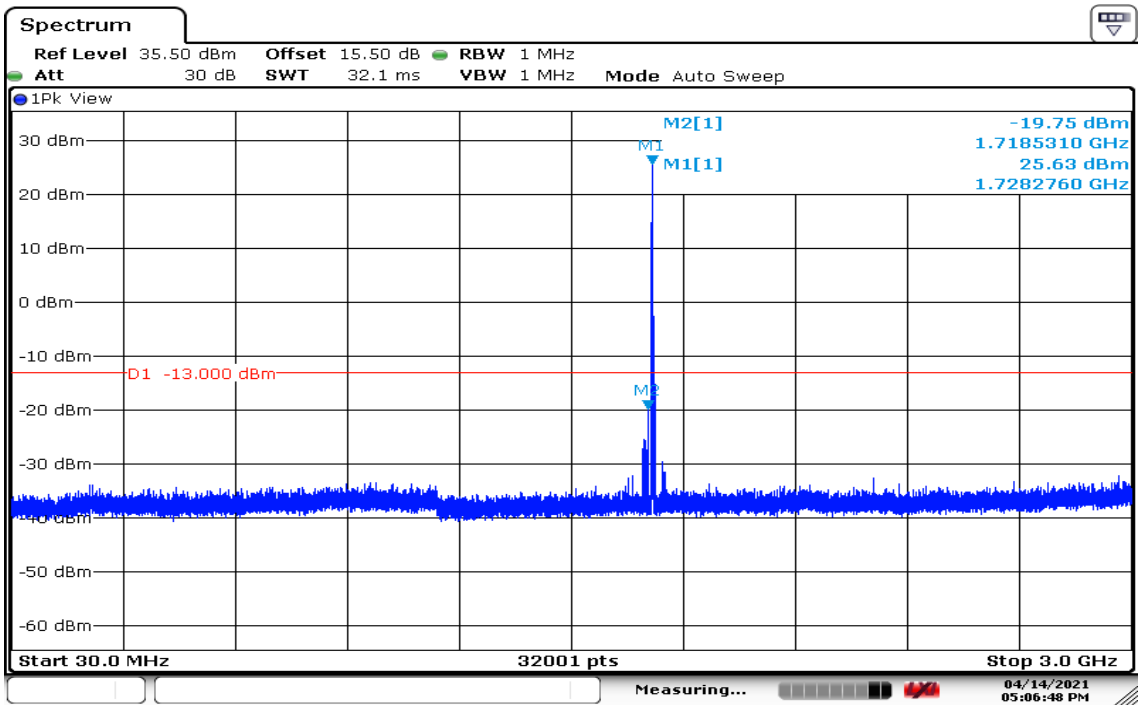

Date: 14.APR.2021 17:06:49

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

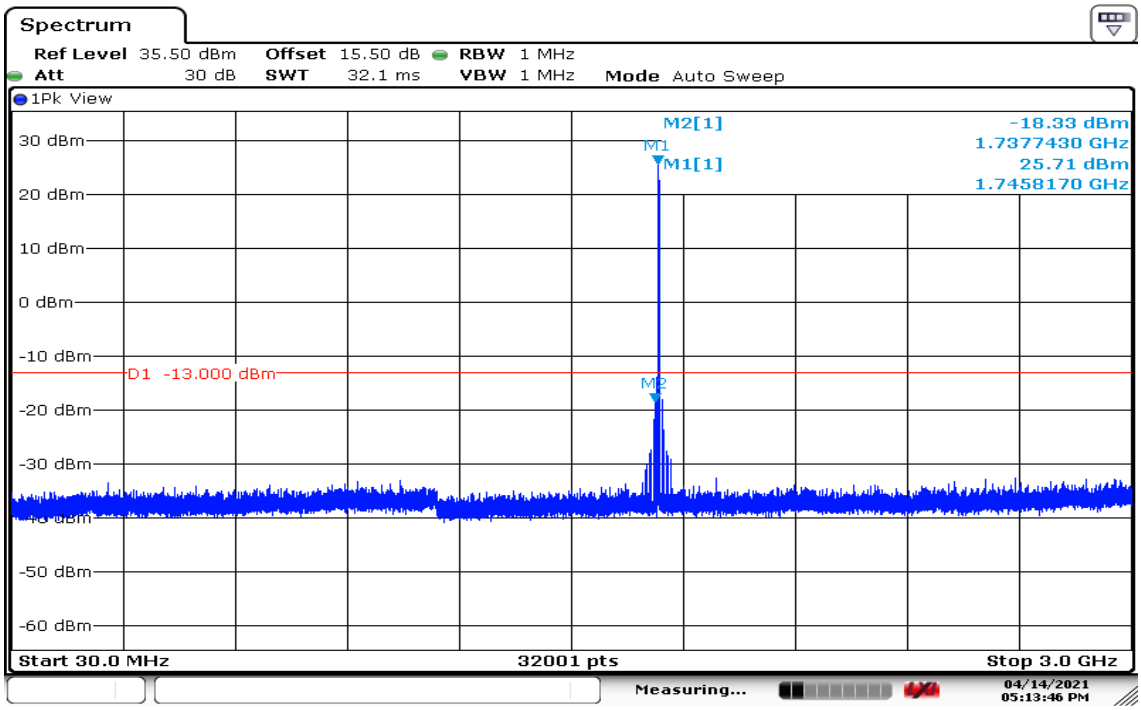

Date: 14.APR.2021 17:13:46

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CHANNEL BANDWIDTH: 10MHz / 3GHz-20GHz

CH Low

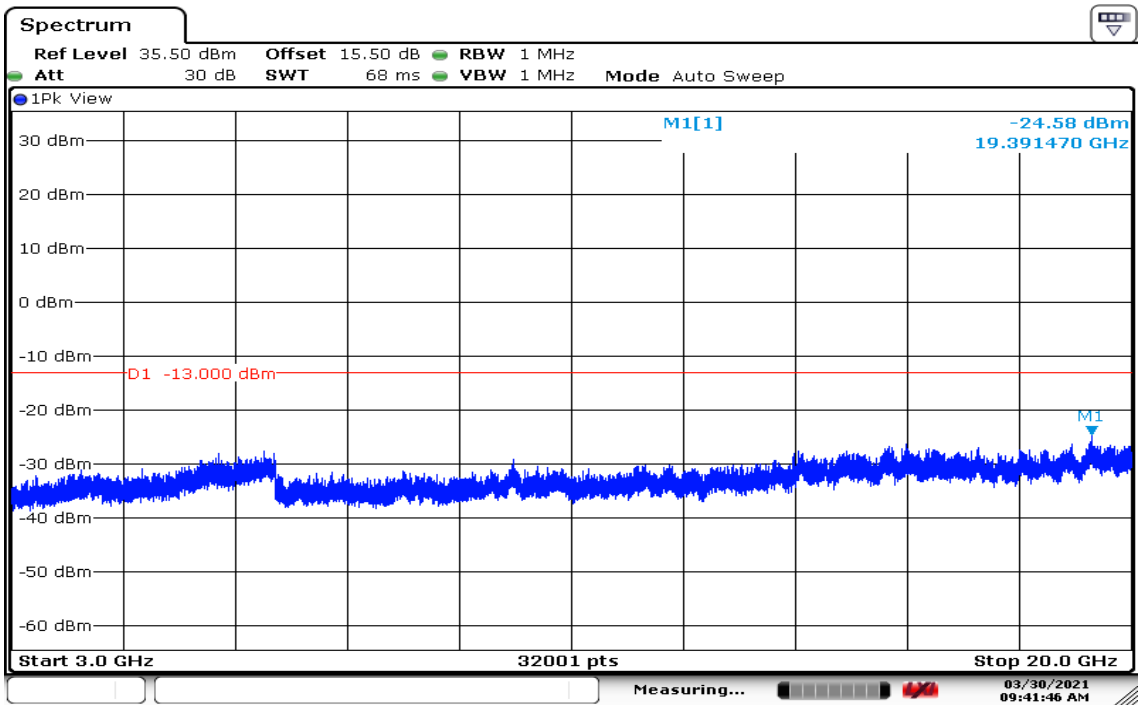

Date: 30.MAR.2021 09:41:47

CH Mid

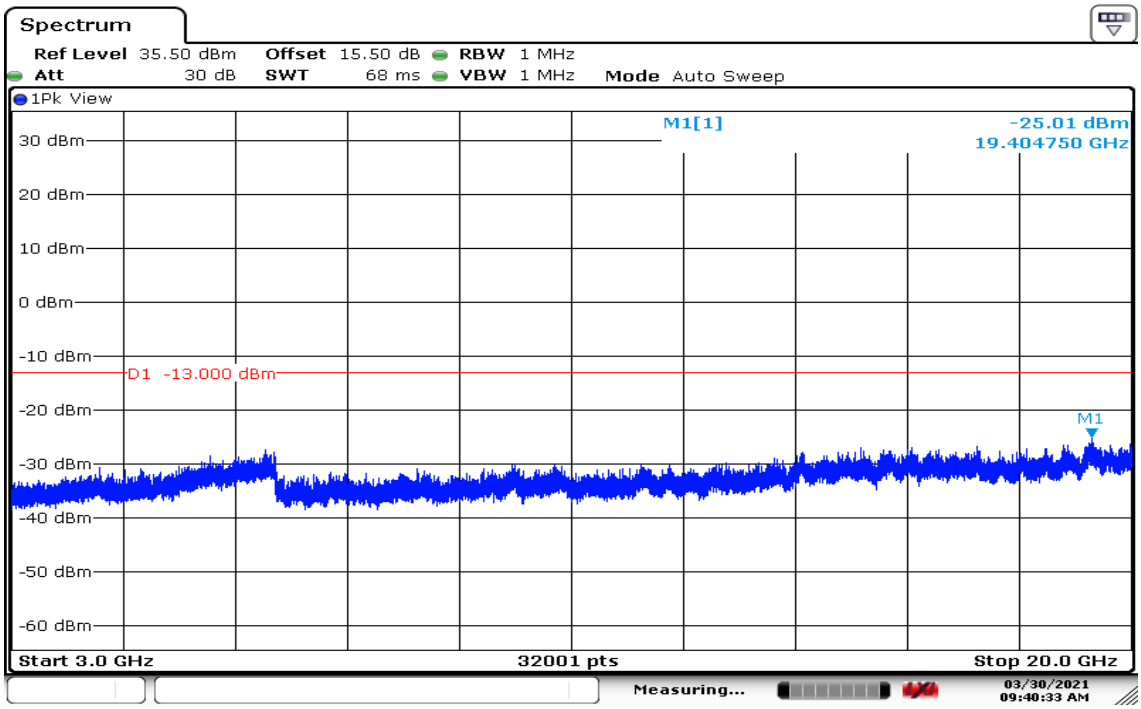

Date: 30.MAR.2021 09:40:34

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

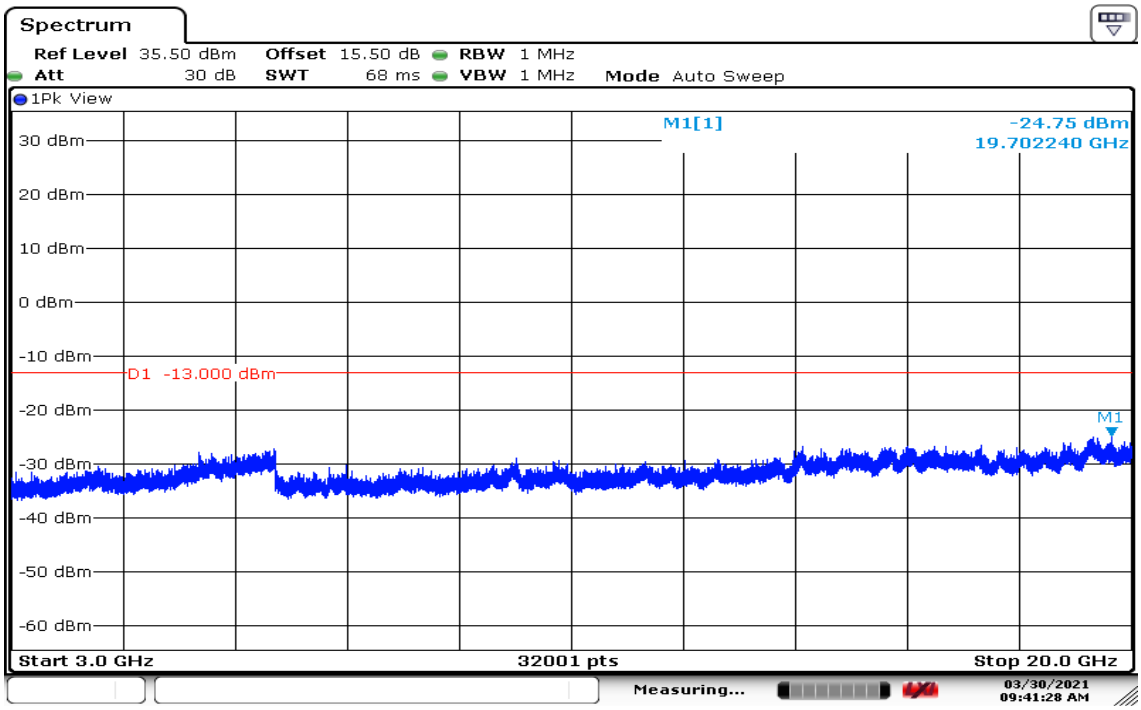

Date: 30.MAR.2021 09:41:28

CHANNEL BANDWIDTH: 15MHz / 30MHz-3GHz

CH Low

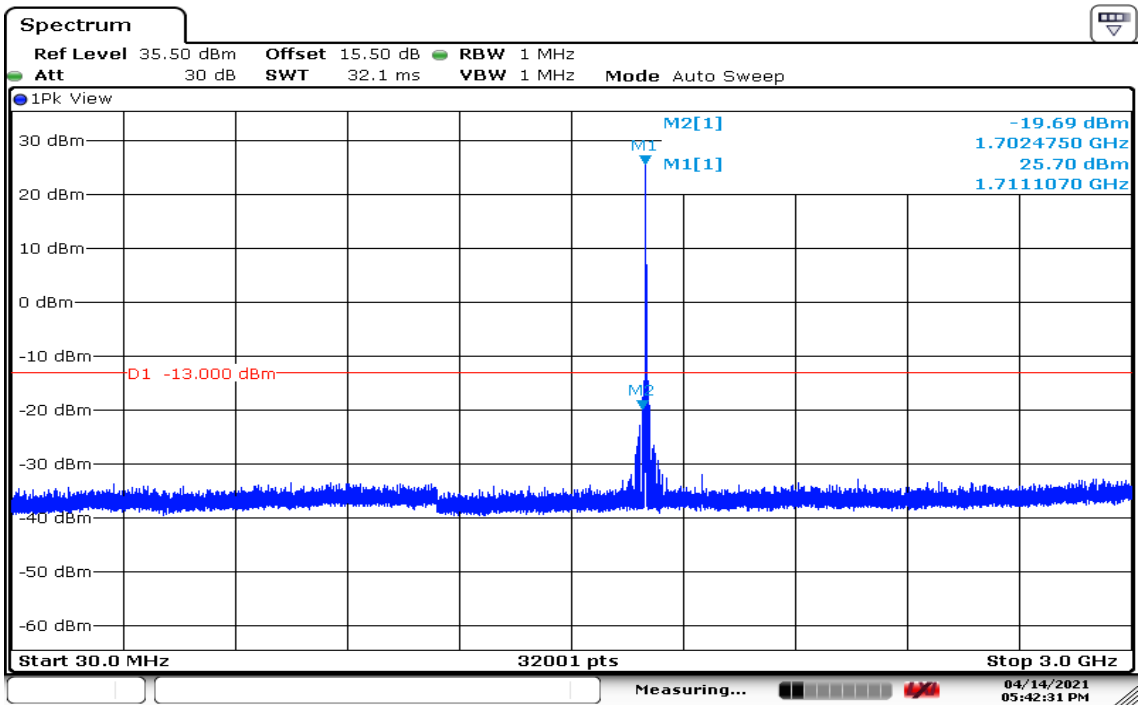

Date: 14.APR.2021 17:42:31

CH Mid

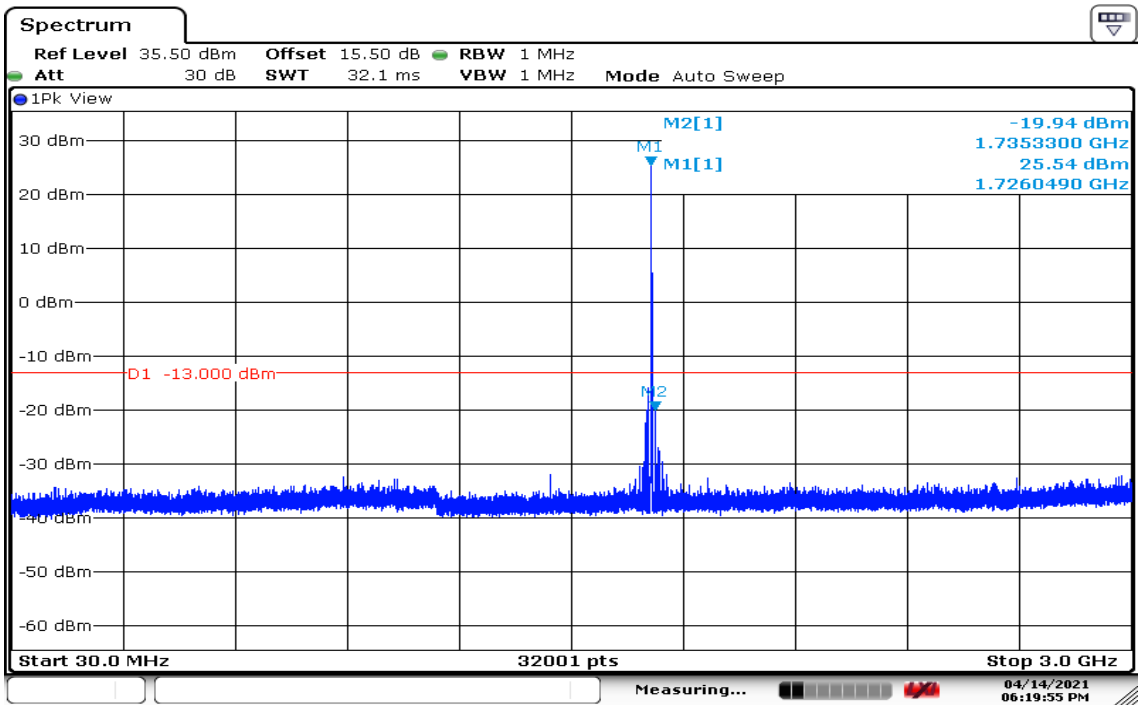

Date: 14.APR.2021 18:19:55

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

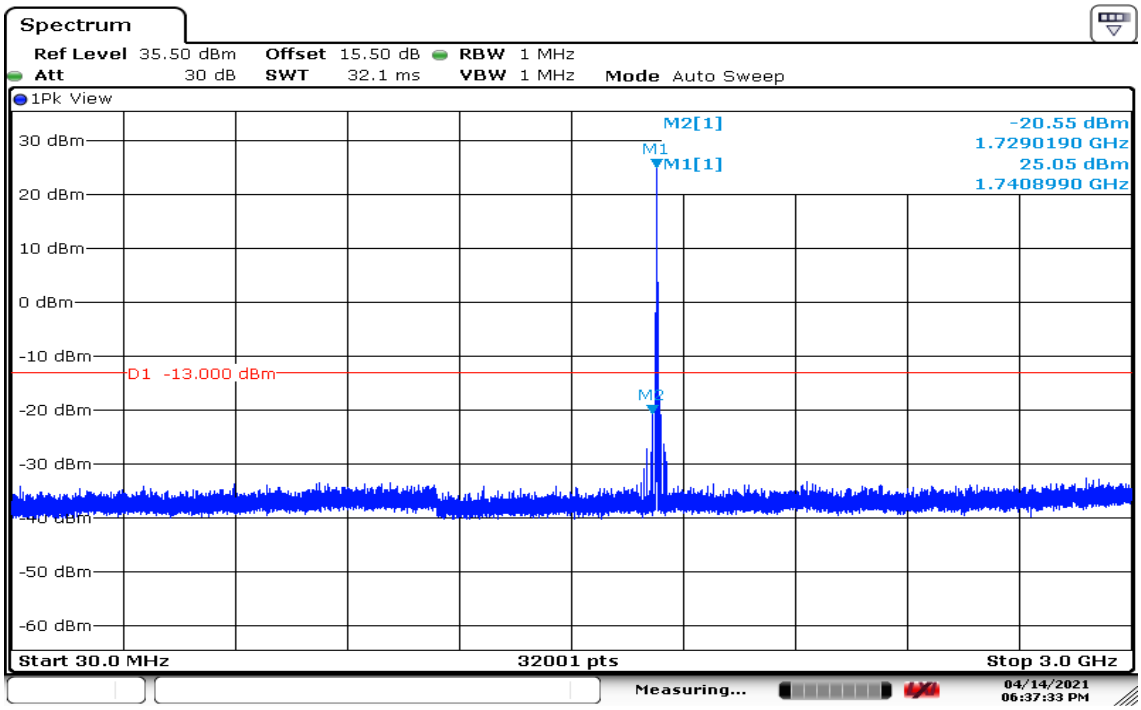

Date: 14.APR.2021 18:37:34

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CHANNEL BANDWIDTH: 15MHz / 3GHz-20GHz

CH Low

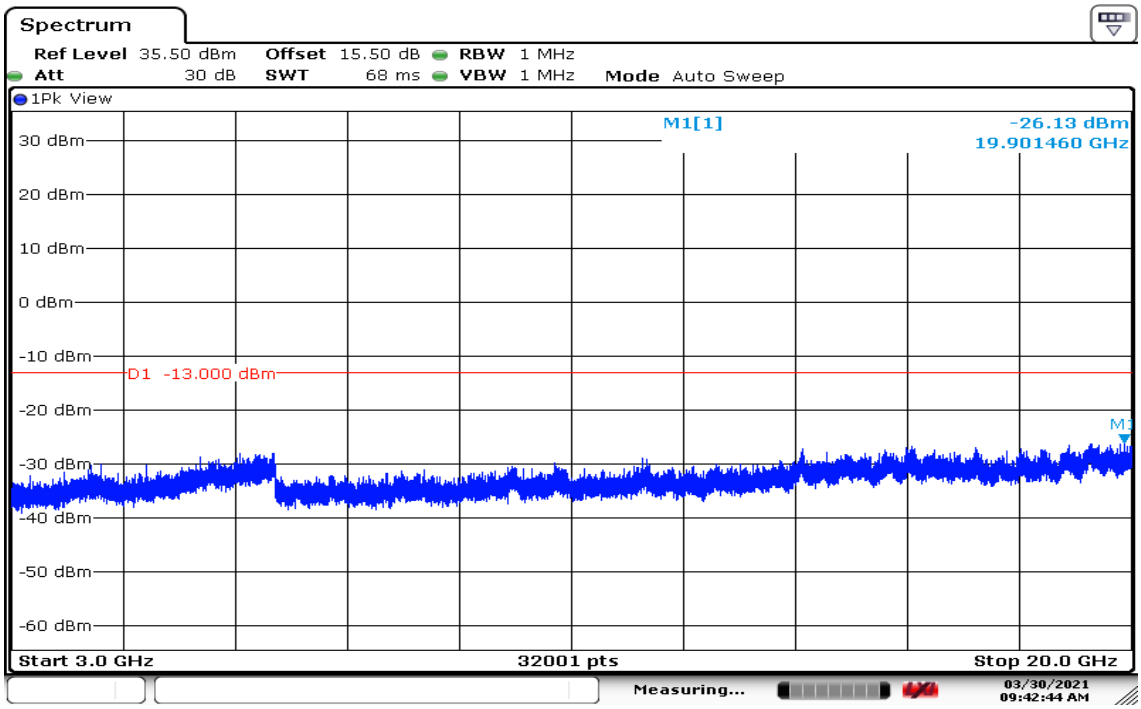

Date: 30.MAR.2021 09:42:45

CH Mid

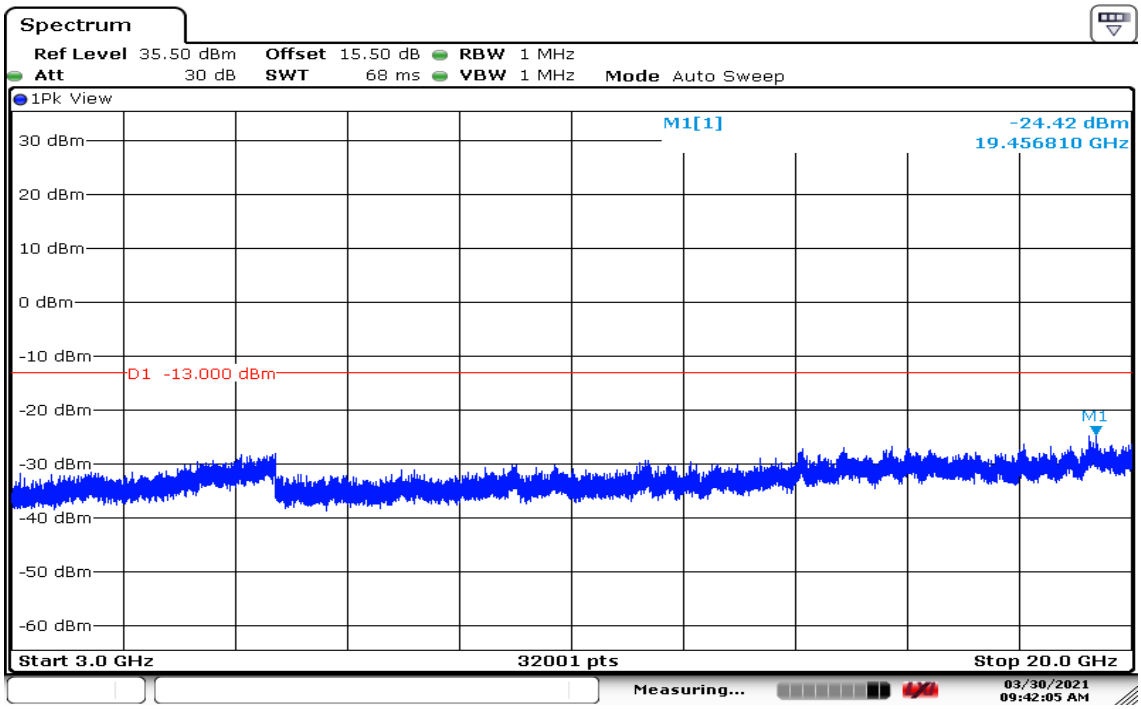

Date: 30.MAR.2021 09:42:05

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

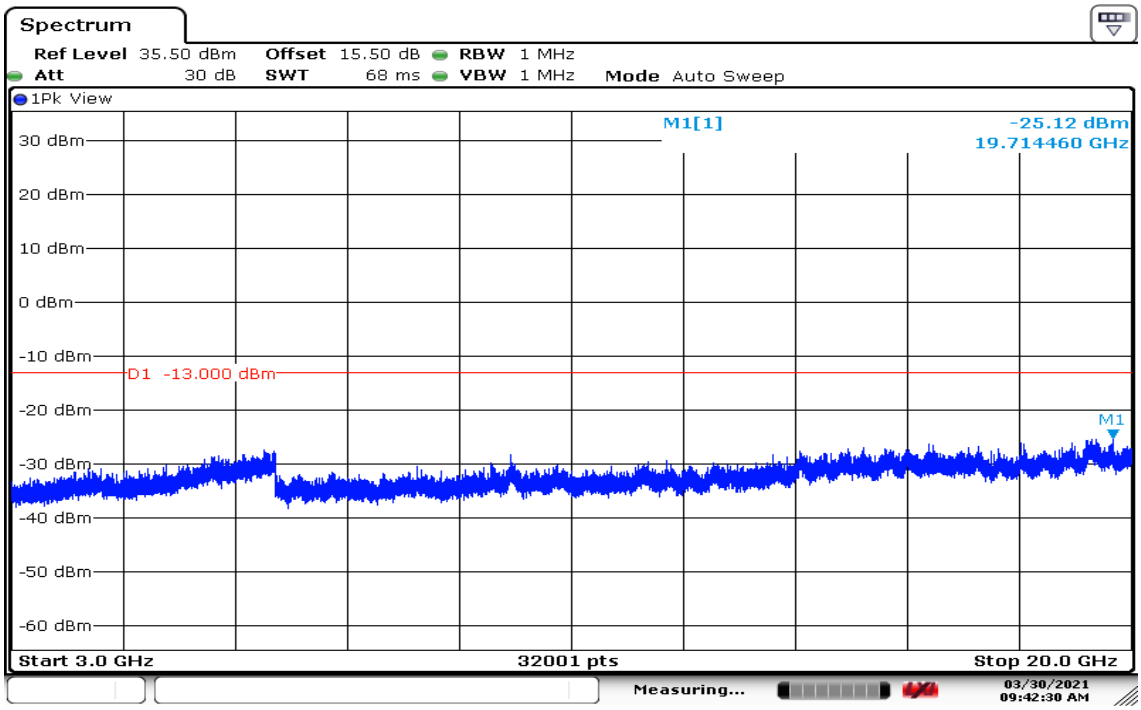

Date: 30.MAR.2021 09:42:30

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CHANNEL BANDWIDTH: 20MHz / 30MHz-3GHz

CH Low

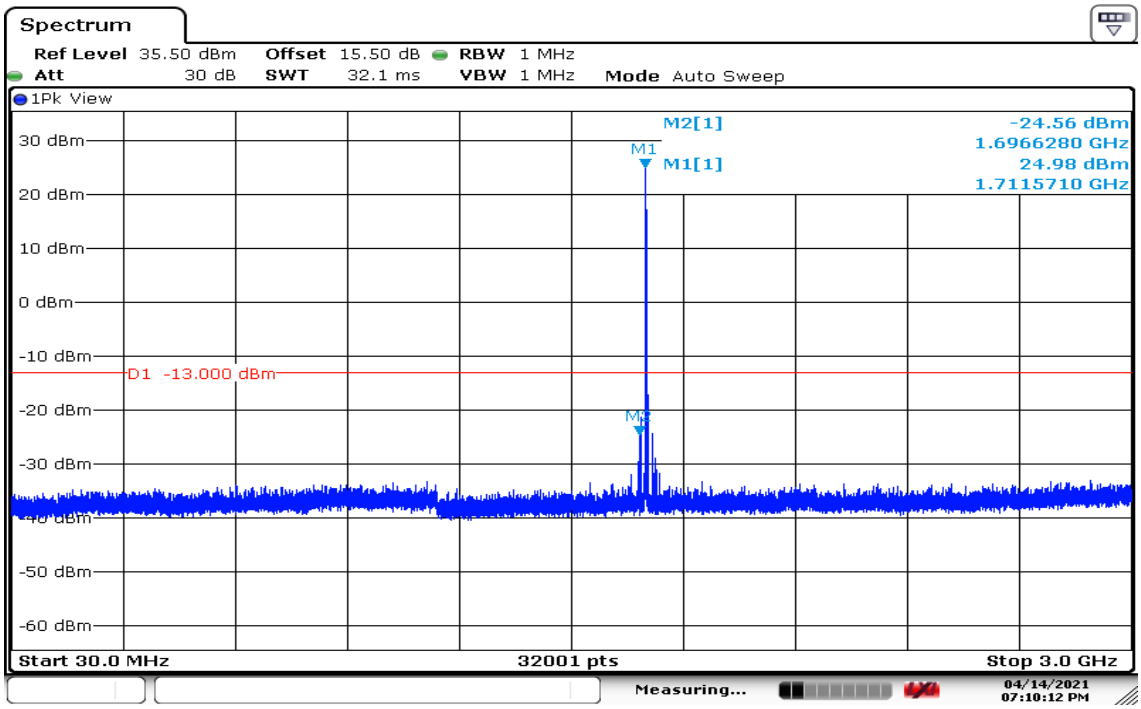

Date: 14.APR.2021 19:10:13

CH Mid

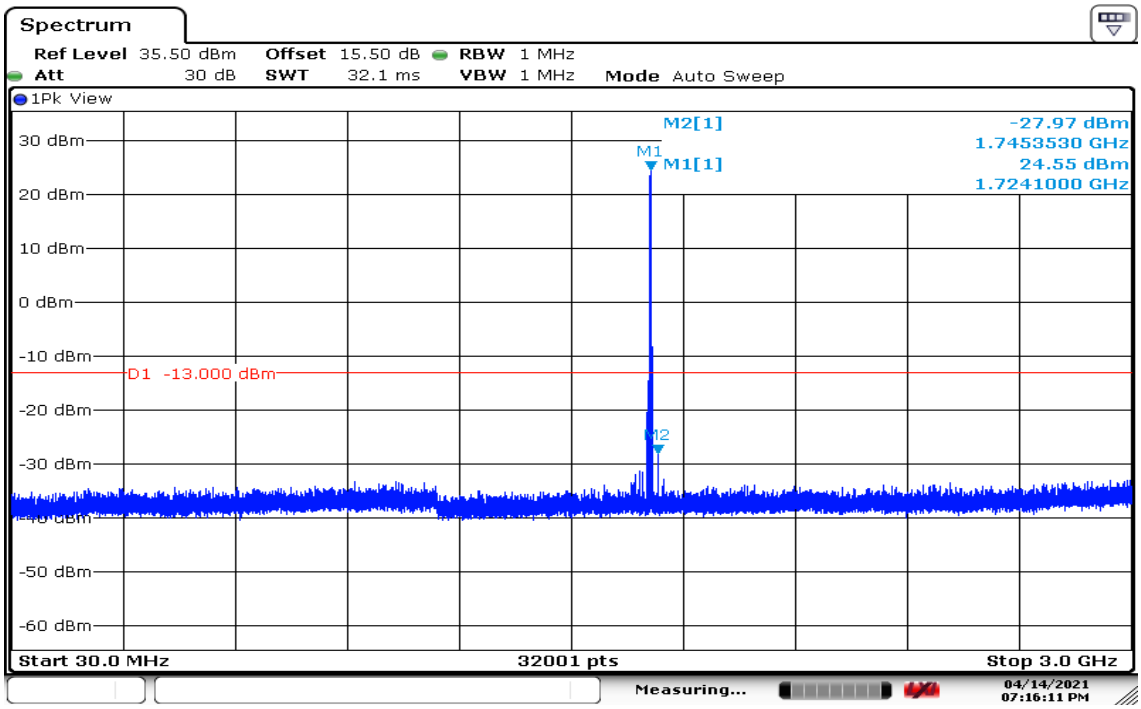

Date: 14.APR.2021 19:16:11

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

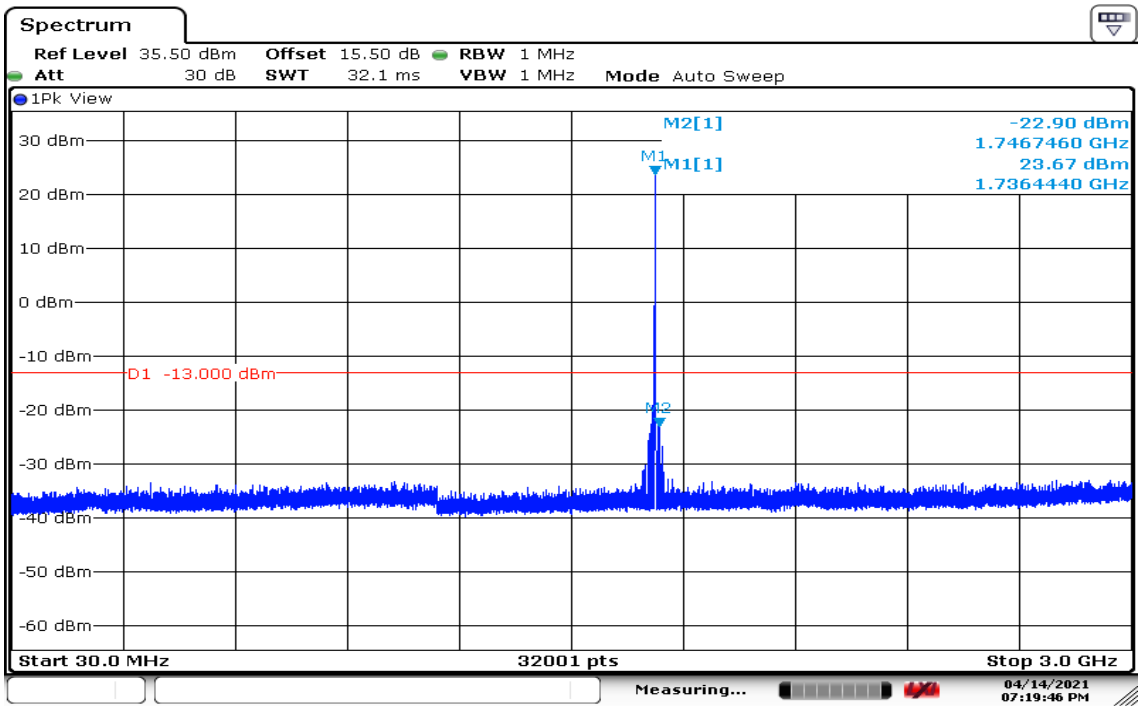

Date:14.APR.2021 19:19:46

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CHANNEL BANDWIDTH: 20MHz / 3GHz-20GHz

CH Low

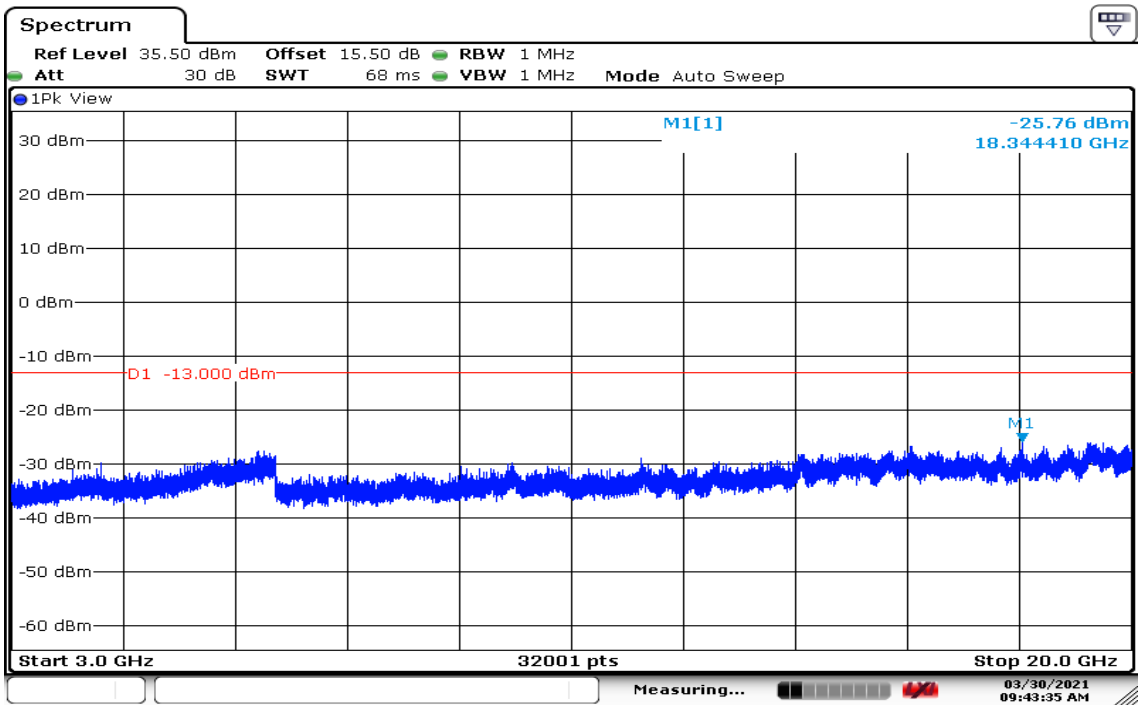

Date: 30.MAR.2021 09:43:35

CH Mid

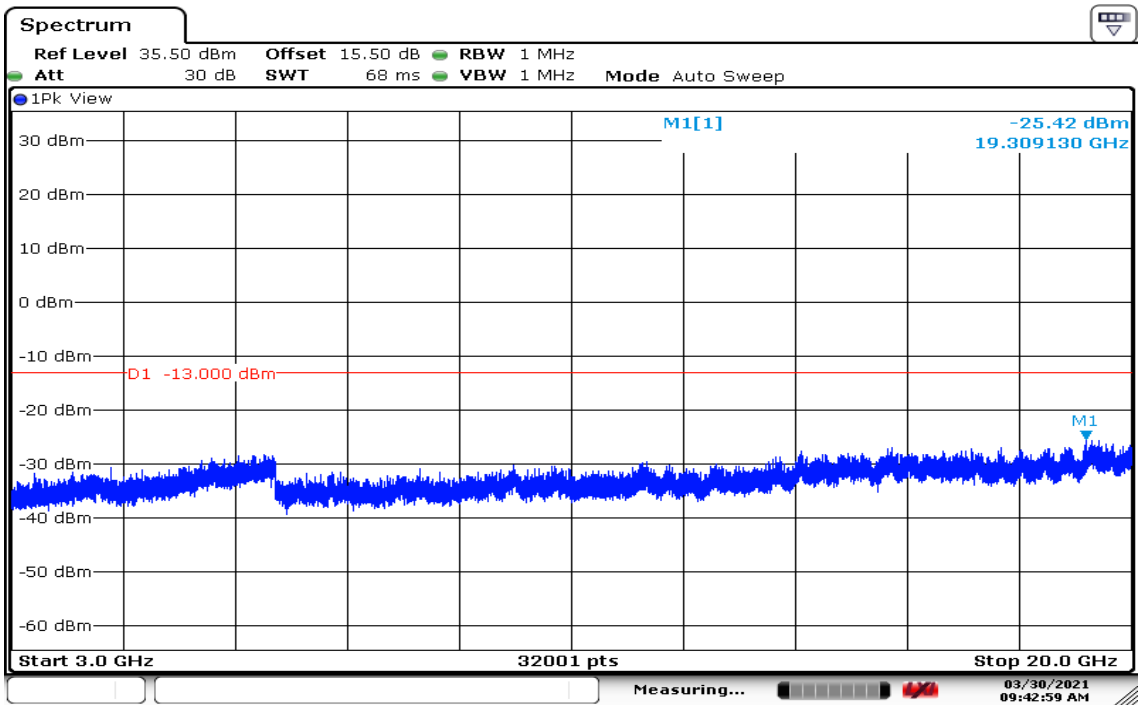

Date: 30.MAR.2021 09:43:00

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

CH High

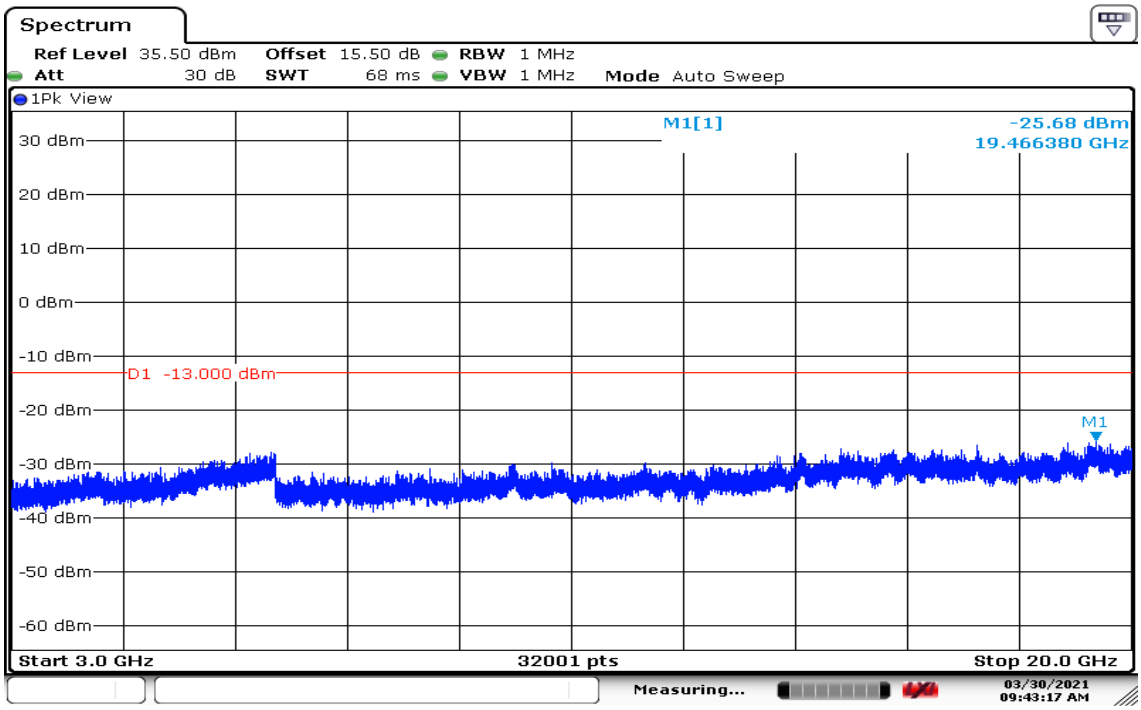

Date: 30.MAR.2021 09:43:17

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

8.7 RADIATED EMISSION MEASUREMENT

LIMITS

FCC §27.53(h), Band 4
General protection levels. Except as otherwise specified below, for operations in the 1710-1755MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least 43 + 10 log10 (P) dB.

TEST PROCEDURES

1. According to KDB 971168 D01 and TIA-603-E.
2. The EUT was placed on a turntable
   (1) Below 1G : 0.8m
   (2) Above 1G : 1.5m
   (3) EUT set 3m from the receiving antenna
   (4) The table was rotated 360 degrees of the highest spurious emission to determine the position.
3. Set the spectrum analyzer , RBW=1MHz, VBW=3MHz.
4. A horn antenna was driven by a signal generator.
5. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Test Results

LTE Band 4 / BW: 20MHz / QPSK / RB =1, RB Offset = 0

Operation Mode:	Tx / Low CH	**Test Date:**	April 21, 2021
Temperature:	22.4℃	**Tested by:**	Ray Li
Humidity:	53% RH	**Polarity:**	Ver.

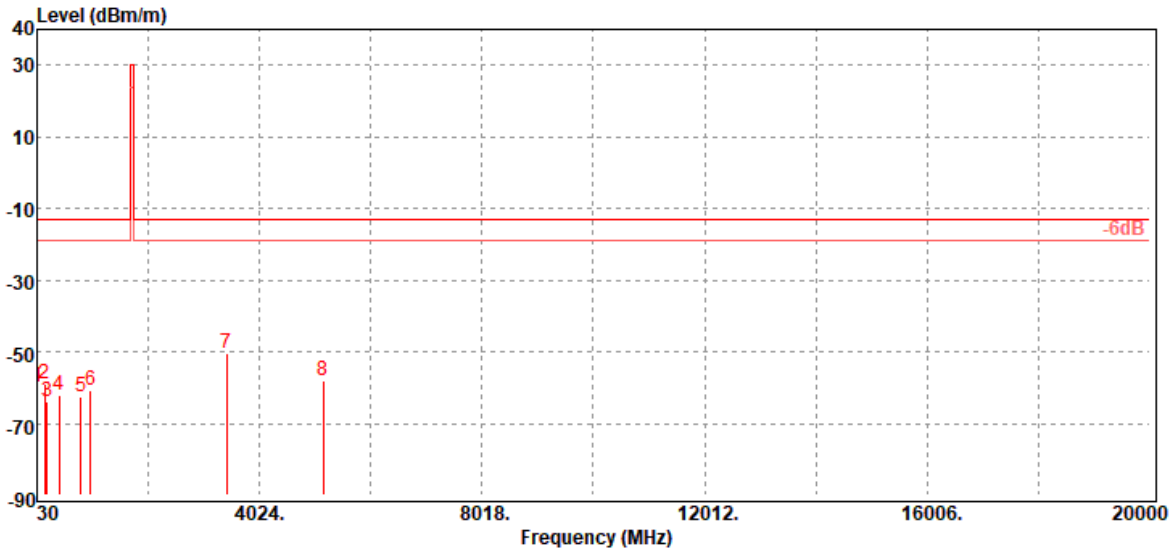

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
34.85	-60.06	-34.26	-25.32	-0.48	-13.00	-47.06	V
162.89	-59.06	-52.00	-6.01	-1.05	-13.00	-46.06	V
211.39	-64.08	-60.79	-2.10	-1.19	-13.00	-51.08	V
427.70	-62.13	-58.52	-1.90	-1.71	-13.00	-49.13	V
810.85	-62.48	-58.61	-1.48	-2.39	-13.00	-49.48	V
993.21	-60.79	-56.72	-1.40	-2.67	-13.00	-47.79	V
3440.00	-50.50	-57.71	12.72	-5.51	-13.00	-37.50	V
5160.00	-58.22	-64.27	12.76	-6.71	-13.00	-45.22	V

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Operation Mode:	Tx / Low CH	**Test Date:**	April 21, 2021
Temperature:	22.4℃	**Tested by:**	Ray Li
Humidity:	53% RH	**Polarity:**	Hor.

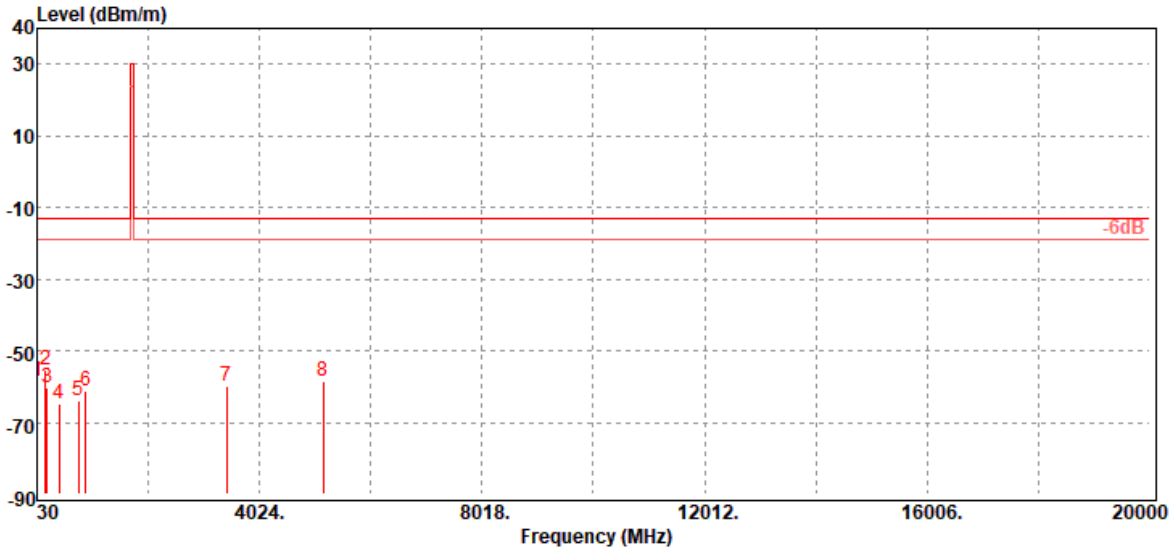

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
31.94	-58.64	-30.01	-28.16	-0.47	-13.00	-45.64	H
187.14	-55.27	-50.15	-3.99	-1.13	-13.00	-42.27	H
209.45	-60.39	-57.02	-2.18	-1.19	-13.00	-47.39	H
427.70	-64.82	-61.21	-1.90	-1.71	-13.00	-51.82	H
772.05	-63.95	-60.22	-1.40	-2.33	-13.00	-50.95	H
903.00	-61.42	-57.61	-1.26	-2.55	-13.00	-48.42	H
3440.00	-59.82	-67.03	12.72	-5.51	-13.00	-46.82	H
5160.00	-58.41	-64.46	12.76	-6.71	-13.00	-45.41	H

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Operation Mode:	Tx / Mid CH	**Test Date:**	April 21, 2021
Temperature:	22.4℃	**Tested by:**	Ray Li
Humidity:	53% RH	**Polarity:**	Ver.

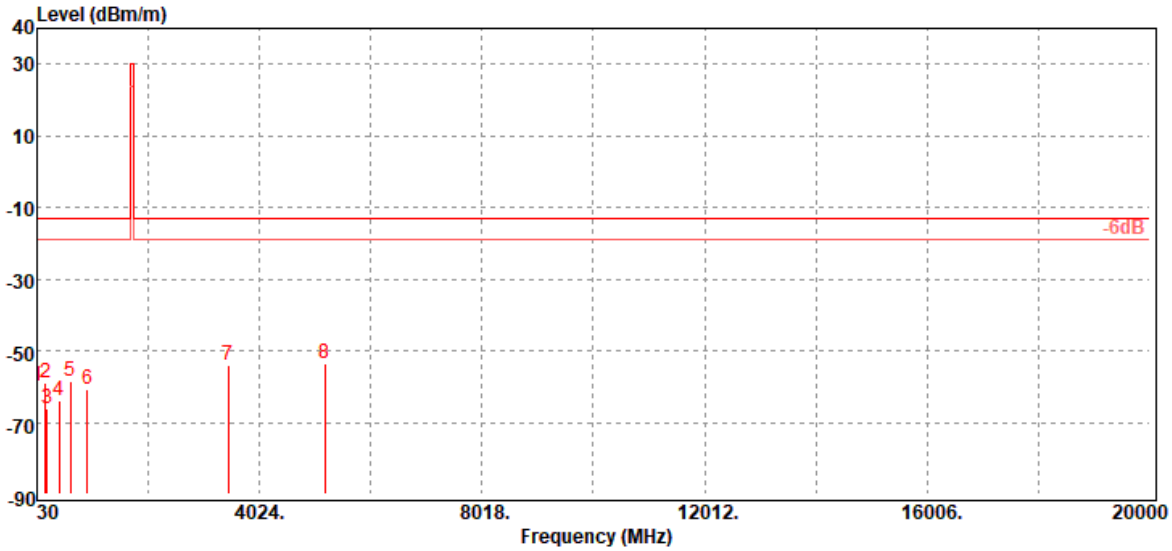

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
34.85	-60.07	-34.27	-25.32	-0.48	-13.00	-47.07	V
187.14	-59.04	-53.92	-3.99	-1.13	-13.00	-46.04	V
216.24	-65.95	-62.66	-2.08	-1.21	-13.00	-52.95	V
427.70	-63.70	-60.09	-1.90	-1.71	-13.00	-50.70	V
626.55	-58.38	-54.84	-1.43	-2.11	-13.00	-45.38	V
932.10	-60.62	-56.73	-1.30	-2.59	-13.00	-47.62	V
3465.00	-53.79	-60.90	12.64	-5.53	-13.00	-40.79	V
5197.50	-53.50	-59.73	12.98	-6.75	-13.00	-40.50	V

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Operation Mode:	Tx / Mid CH	**Test Date:**	April 21, 2021
Temperature:	22.4℃	**Tested by:**	Ray Li
Humidity:	53% RH	**Polarity:**	Hor.

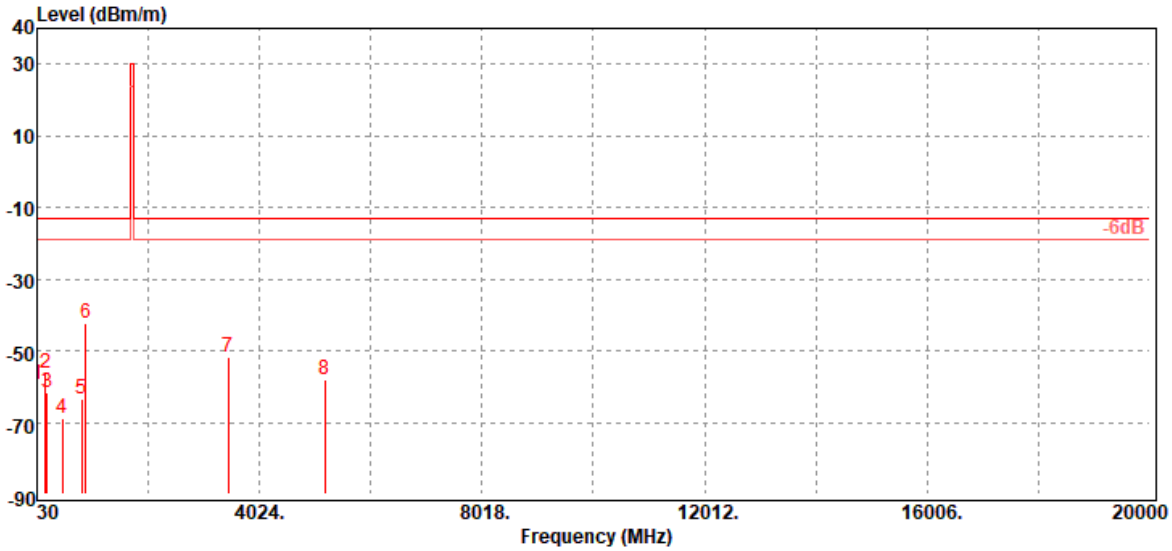

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
34.85	-59.39	-33.59	-25.32	-0.48	-13.00	-46.39	H
187.14	-56.13	-51.01	-3.99	-1.13	-13.00	-43.13	H
212.36	-61.49	-58.19	-2.10	-1.20	-13.00	-48.49	H
487.84	-68.66	-64.58	-2.24	-1.84	-13.00	-55.66	H
830.25	-63.31	-59.39	-1.50	-2.42	-13.00	-50.31	H
904.94	-42.34	-38.49	-1.30	-2.55	-13.00	-29.34	H
3465.00	-51.75	-58.86	12.64	-5.53	-13.00	-38.75	H
5197.50	-58.04	-64.27	12.98	-6.75	-13.00	-45.04	H

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Operation Mode:	Tx / High CH	**Test Date:**	April 21, 2021
Temperature:	22.4℃	**Tested by:**	Ray Li
Humidity:	53% RH	**Polarity:**	Ver.

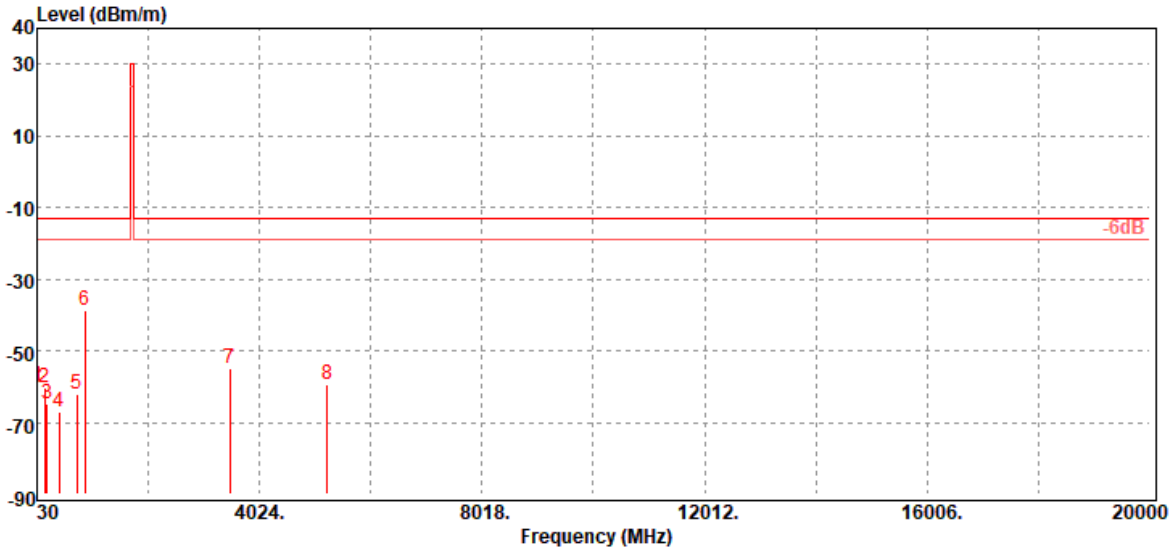

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
34.85	-59.95	-34.15	-25.32	-0.48	-13.00	-46.95	V
160.95	-60.23	-53.08	-6.11	-1.04	-13.00	-47.23	V
209.45	-64.95	-61.58	-2.18	-1.19	-13.00	-51.95	V
432.55	-67.12	-63.45	-1.95	-1.72	-13.00	-54.12	V
747.80	-62.15	-58.44	-1.40	-2.31	-13.00	-49.15	V
896.21	-38.77	-34.95	-1.28	-2.54	-13.00	-25.77	V
3490.00	-54.76	-61.75	12.54	-5.55	-13.00	-41.76	V
5235.00	-59.29	-65.64	13.14	-6.79	-13.00	-46.29	V

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。

Operation Mode:	Tx / High CH	**Test Date:**	April 21, 2021
Temperature:	22.4℃	**Tested by:**	Ray Li
Humidity:	53% RH	**Polarity:**	Hor.

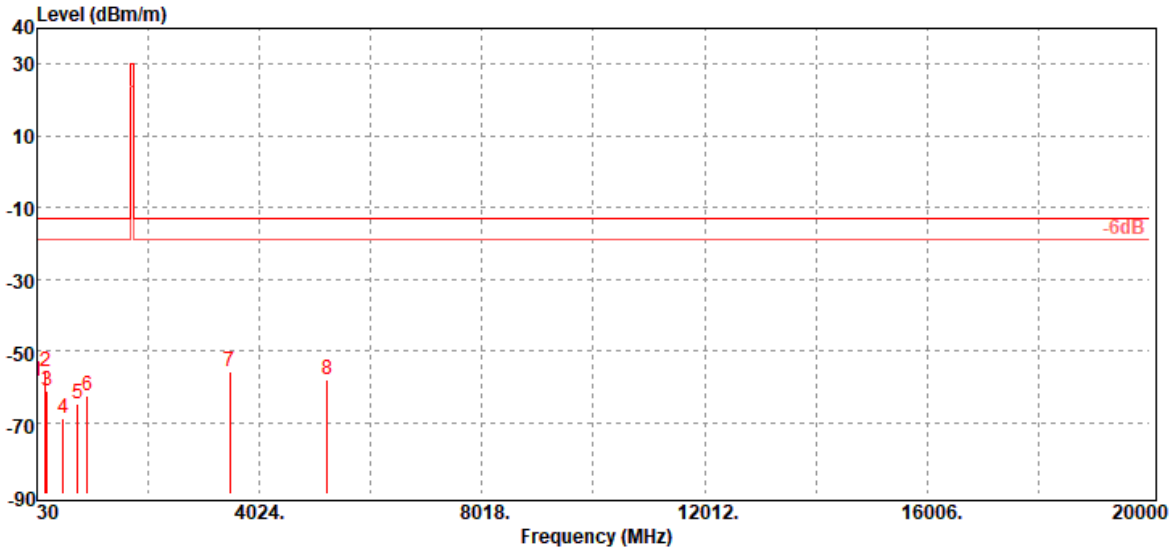

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
32.91	-58.50	-30.84	-27.19	-0.47	-13.00	-45.50	H
187.14	-55.70	-50.58	-3.99	-1.13	-13.00	-42.70	H
209.45	-61.16	-57.79	-2.18	-1.19	-13.00	-48.16	H
500.45	-69.07	-65.21	-1.99	-1.87	-13.00	-56.07	H
764.29	-65.03	-61.30	-1.40	-2.33	-13.00	-52.03	H
927.25	-62.66	-58.78	-1.30	-2.58	-13.00	-49.66	H
3490.00	-55.85	-62.84	12.54	-5.55	-13.00	-42.85	H
5235.00	-58.23	-64.58	13.14	-6.79	-13.00	-45.23	H

- End of Test Report -

This document cannot be reproduced except in full, without prior written approval of the Company. 本報告未經本公司書面許可，不可部份複製。