


Plot 15:

Test Date	2023-07-14
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	IEEE 802.11 n-HT20 MIMO
Signal	IEEE 802.11
Frequency	2412
SAR 10g (W/Kg)	0.047
SAR 1g (W/Kg)	0.086

Maximum location: X=-39.00, Y=-31.00 ; SAR Peak: 0.22 W/kg




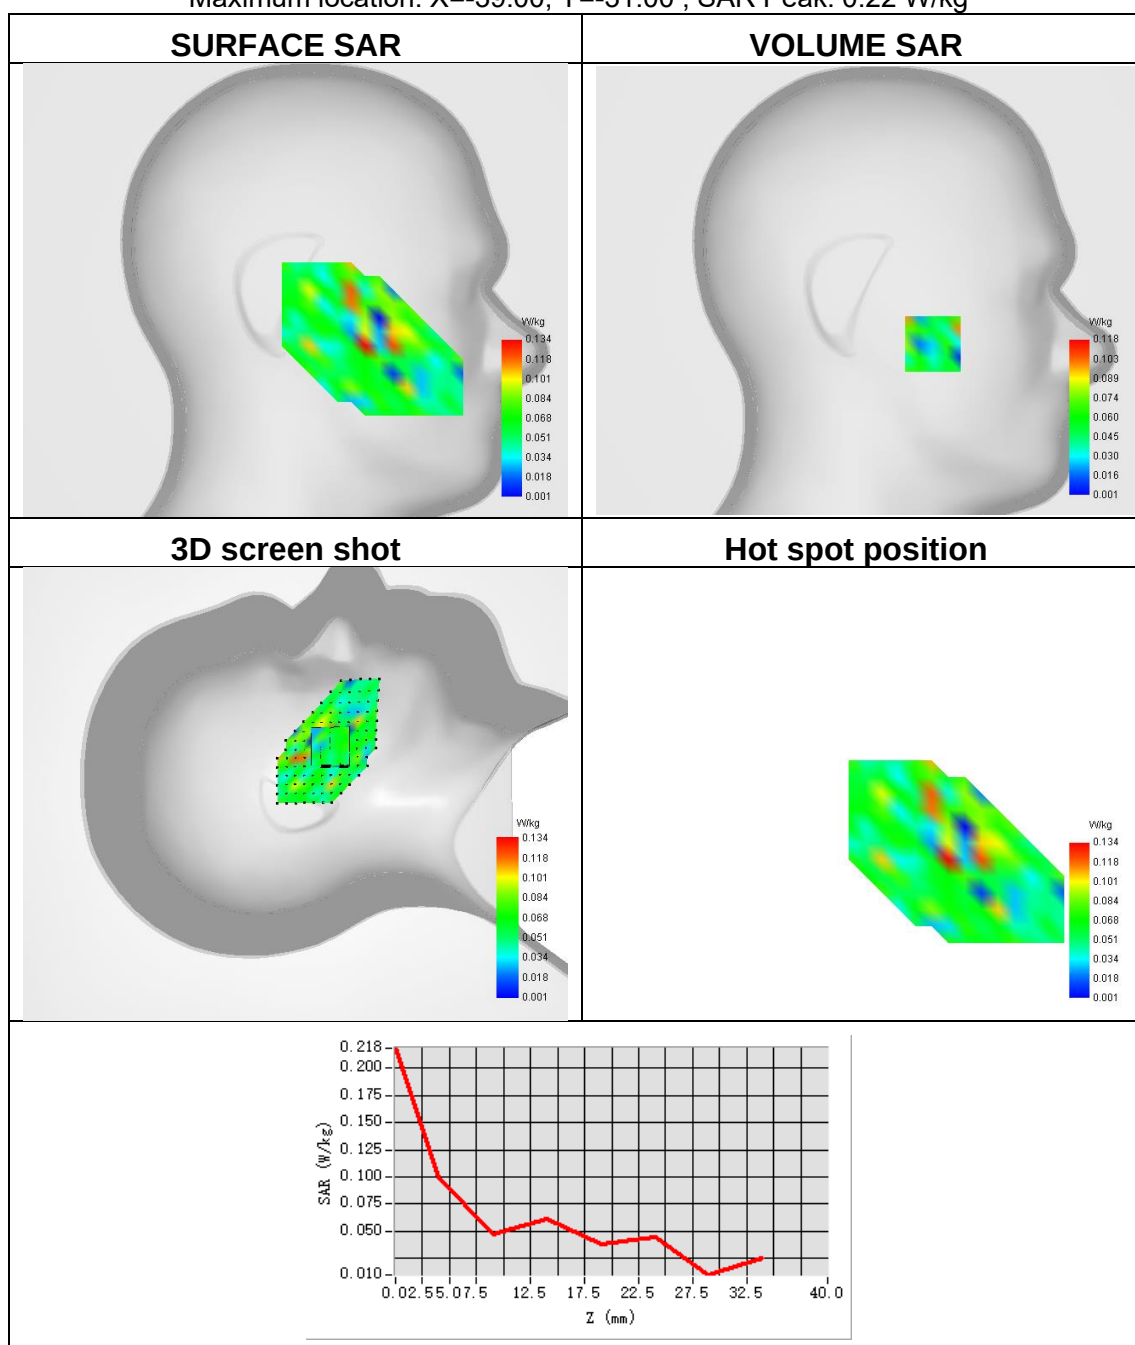

Plot 16:

Test Date	2023-07-14
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front Side
Band	IEEE 802.11 n-HT20 MIMO
Signal	IEEE 802.11
Frequency	2412
SAR 10g (W/Kg)	0.067
SAR 1g (W/Kg)	0.168


Maximum location: X=-24.00, Y=-17.00 ; SAR Peak: 0.45 W/kg

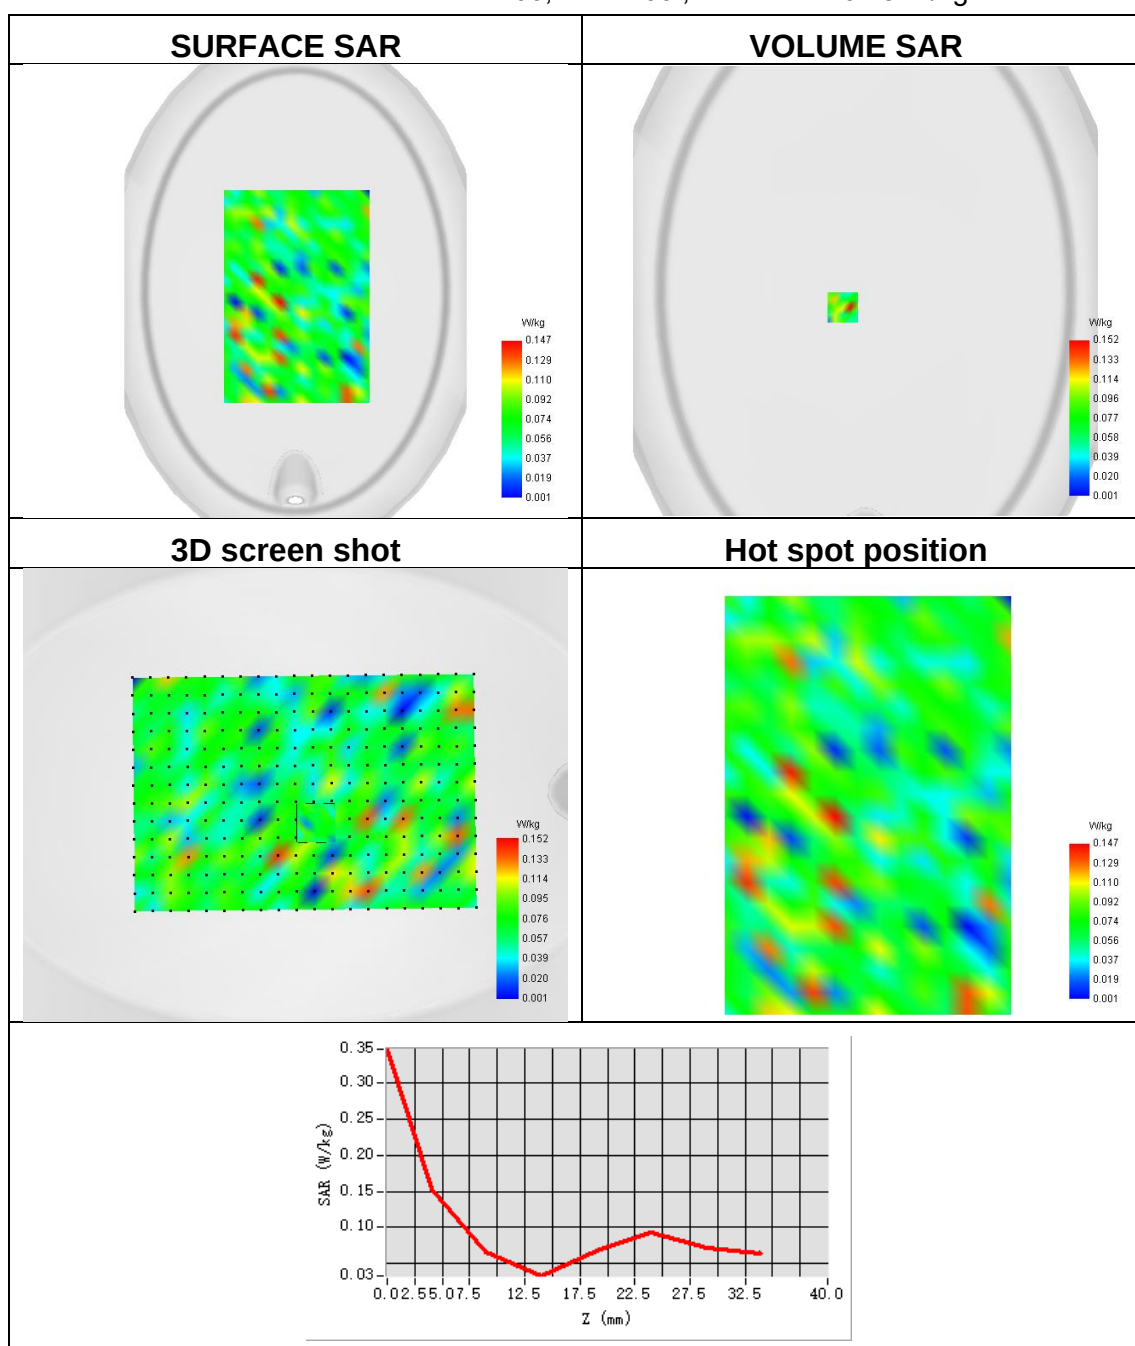

Plot 17:

Test Date	2023-07-18
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	IEEE 802.11n-HT40 ANT A
Signal	IEEE 802.11
Frequency	5190
SAR 10g (W/Kg)	0.089
SAR 1g (W/Kg)	0.280

Maximum location: X=-23.00, Y=0.00 ; SAR Peak: 1.27 W/kg

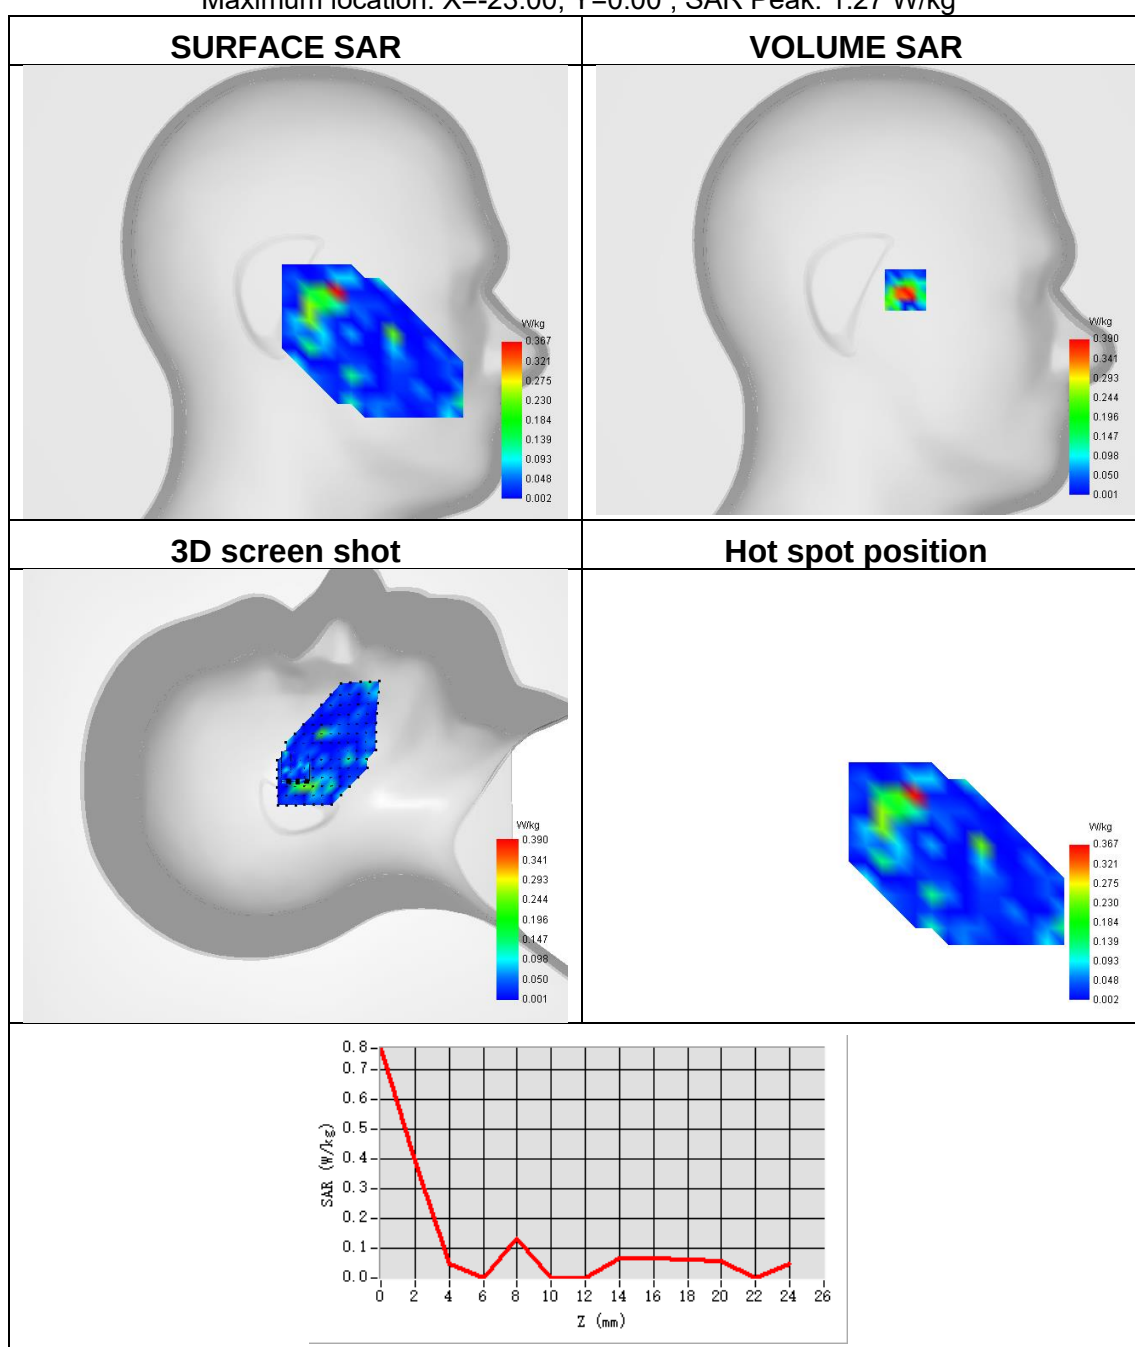




Plot 18:

Test Date	2023-07-18
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front Side
Band	IEEE 802.11 n-HT40 ANT A
Signal	IEEE 802.11
Frequency	5190
SAR 10g (W/Kg)	0.071
SAR 1g (W/Kg)	0.184

Maximum location: X=-32.00, Y=-17.00 ; SAR Peak: 1.12 W/kg

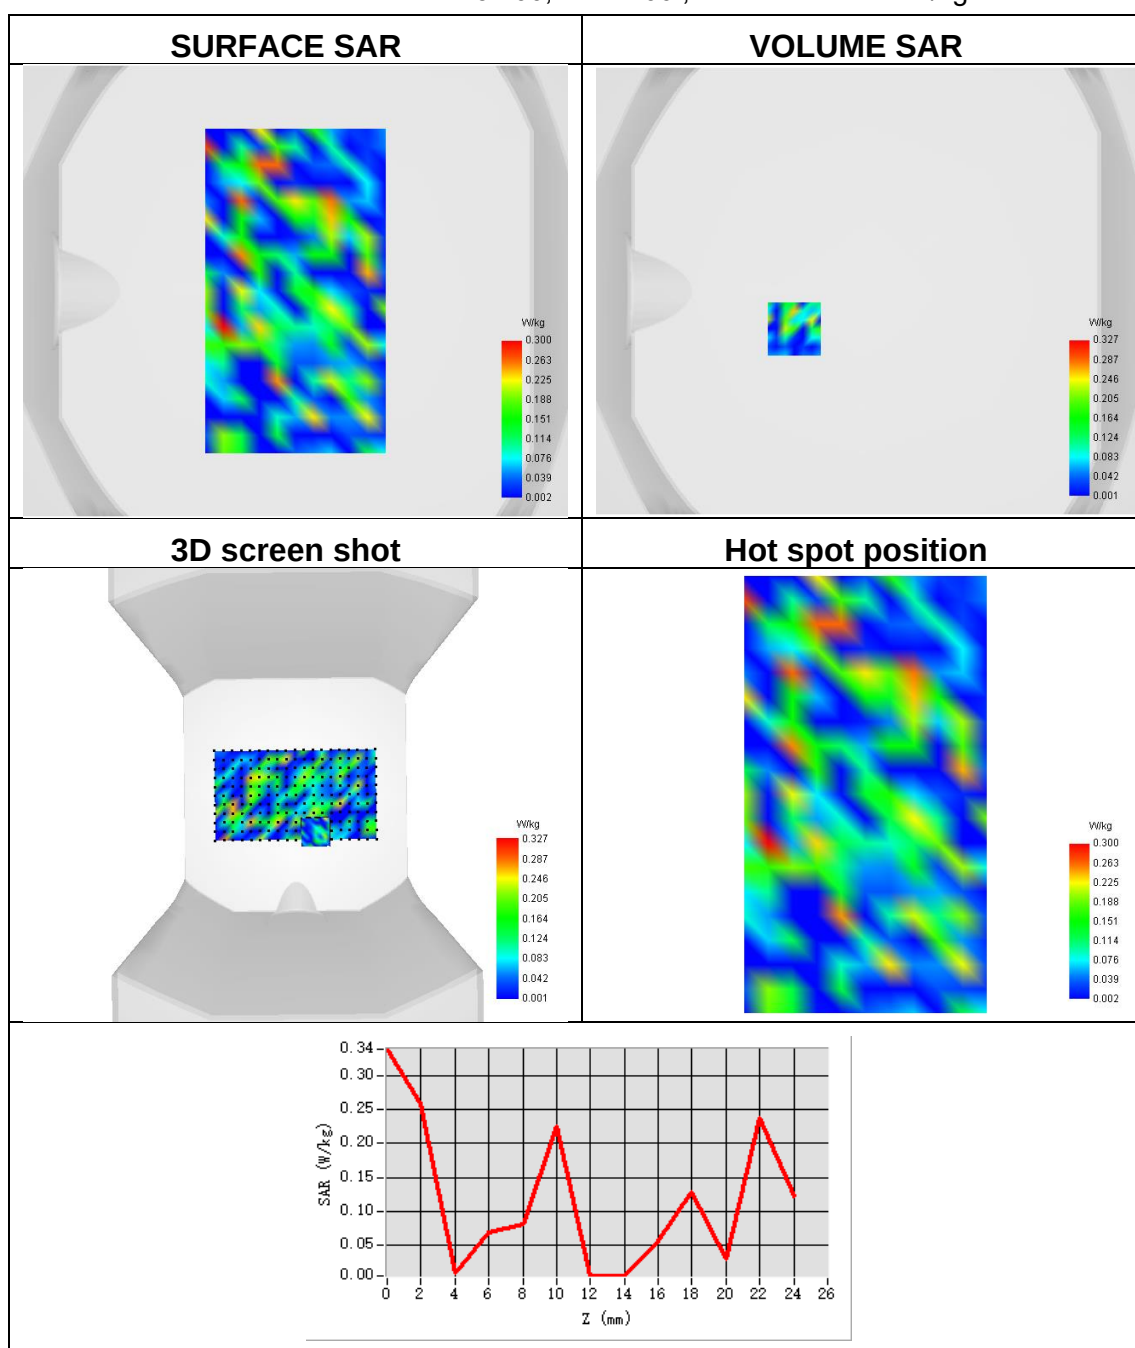




Plot 19:

Test Date	2023-07-18
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	IEEE 802.11n-HT40 ANT B
Signal	IEEE 802.11
Frequency	5190
SAR 10g (W/Kg)	0.092
SAR 1g (W/Kg)	0.337

Maximum location: X=-33.00, Y=-31.00 ; SAR Peak: 2.58 W/kg

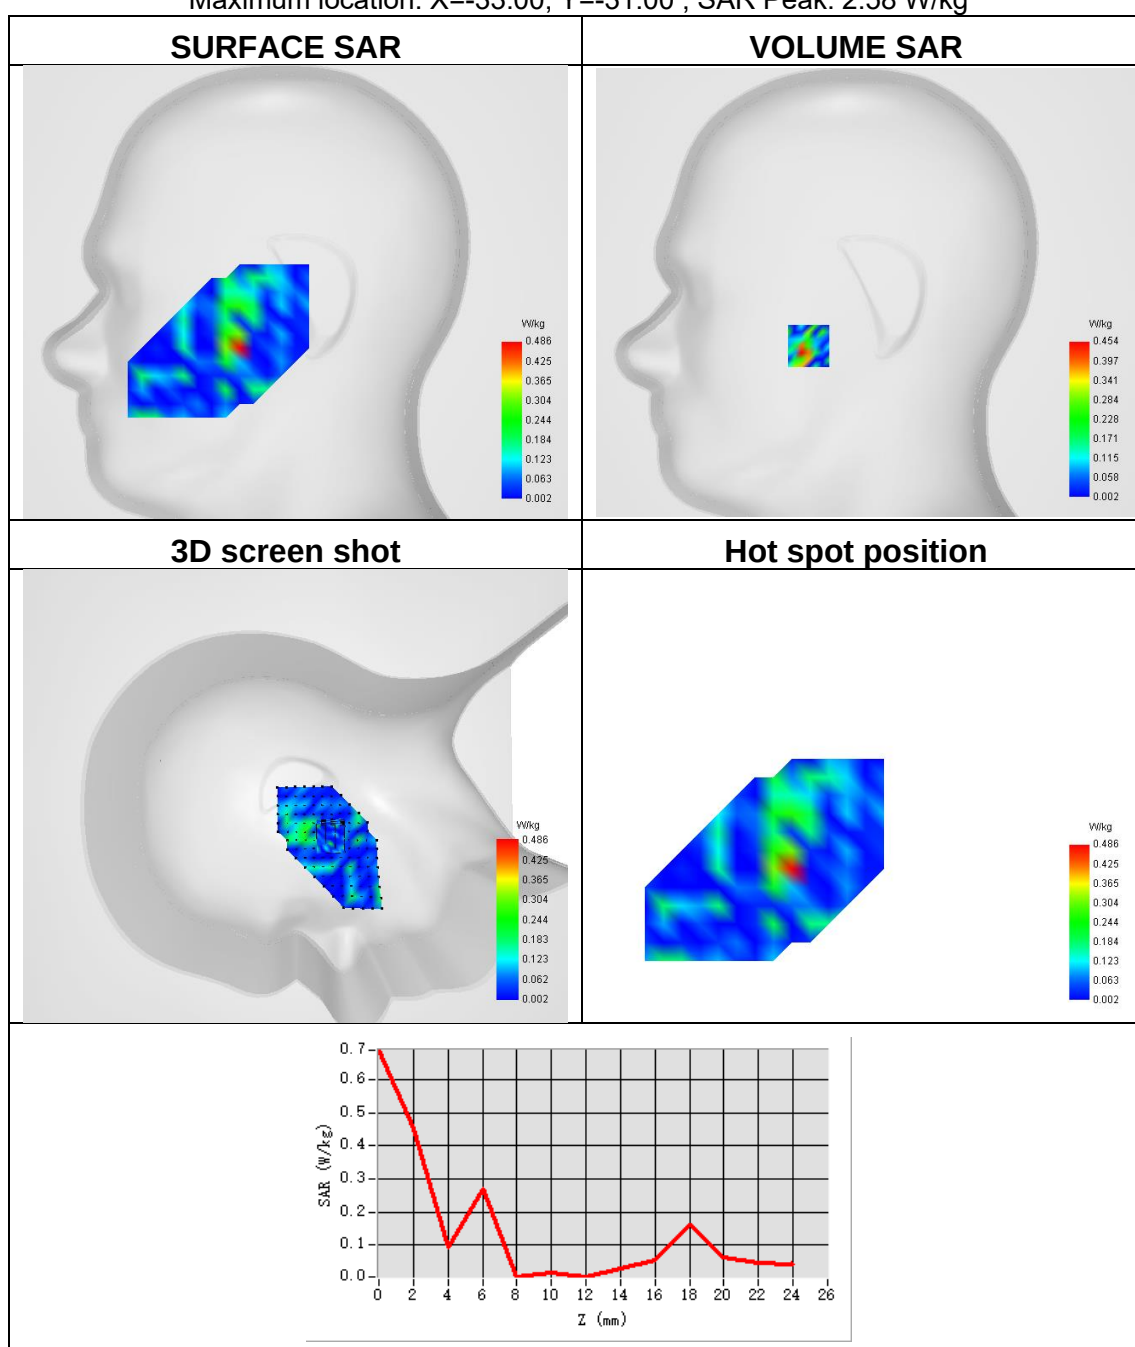




Plot 20:

Test Date	2023-07-18
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right Side
Band	IEEE 802.11a U-NII ANT B
Signal	IEEE 802.11
Frequency	5190
SAR 10g (W/Kg)	0.187
SAR 1g (W/Kg)	0.419

Maximum location: X=7.00, Y=-5.00 ; SAR Peak: 2.74 W/kg

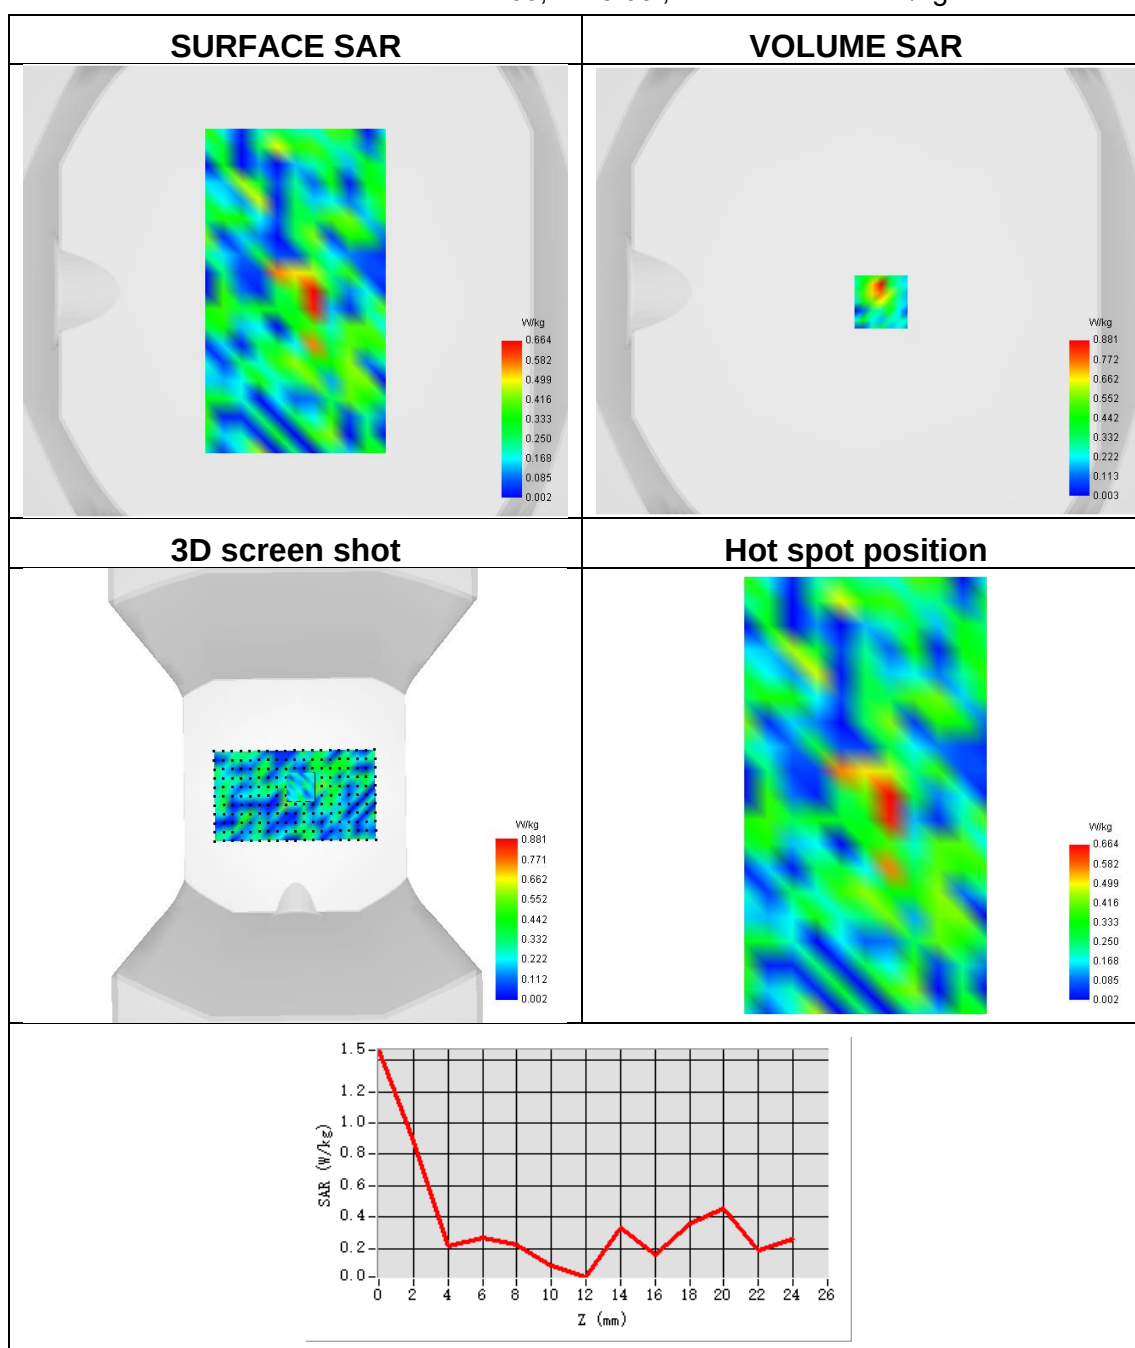




Plot 21:

Test Date	2023-07-21
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	IEEE 802.11n-HT20 MIMO
Signal	IEEE 802.11
Frequency	5190
SAR 10g (W/Kg)	0.199
SAR 1g (W/Kg)	0.387

Maximum location: X=-64.00, Y=-40.00 ; SAR Peak: 2.14 W/kg

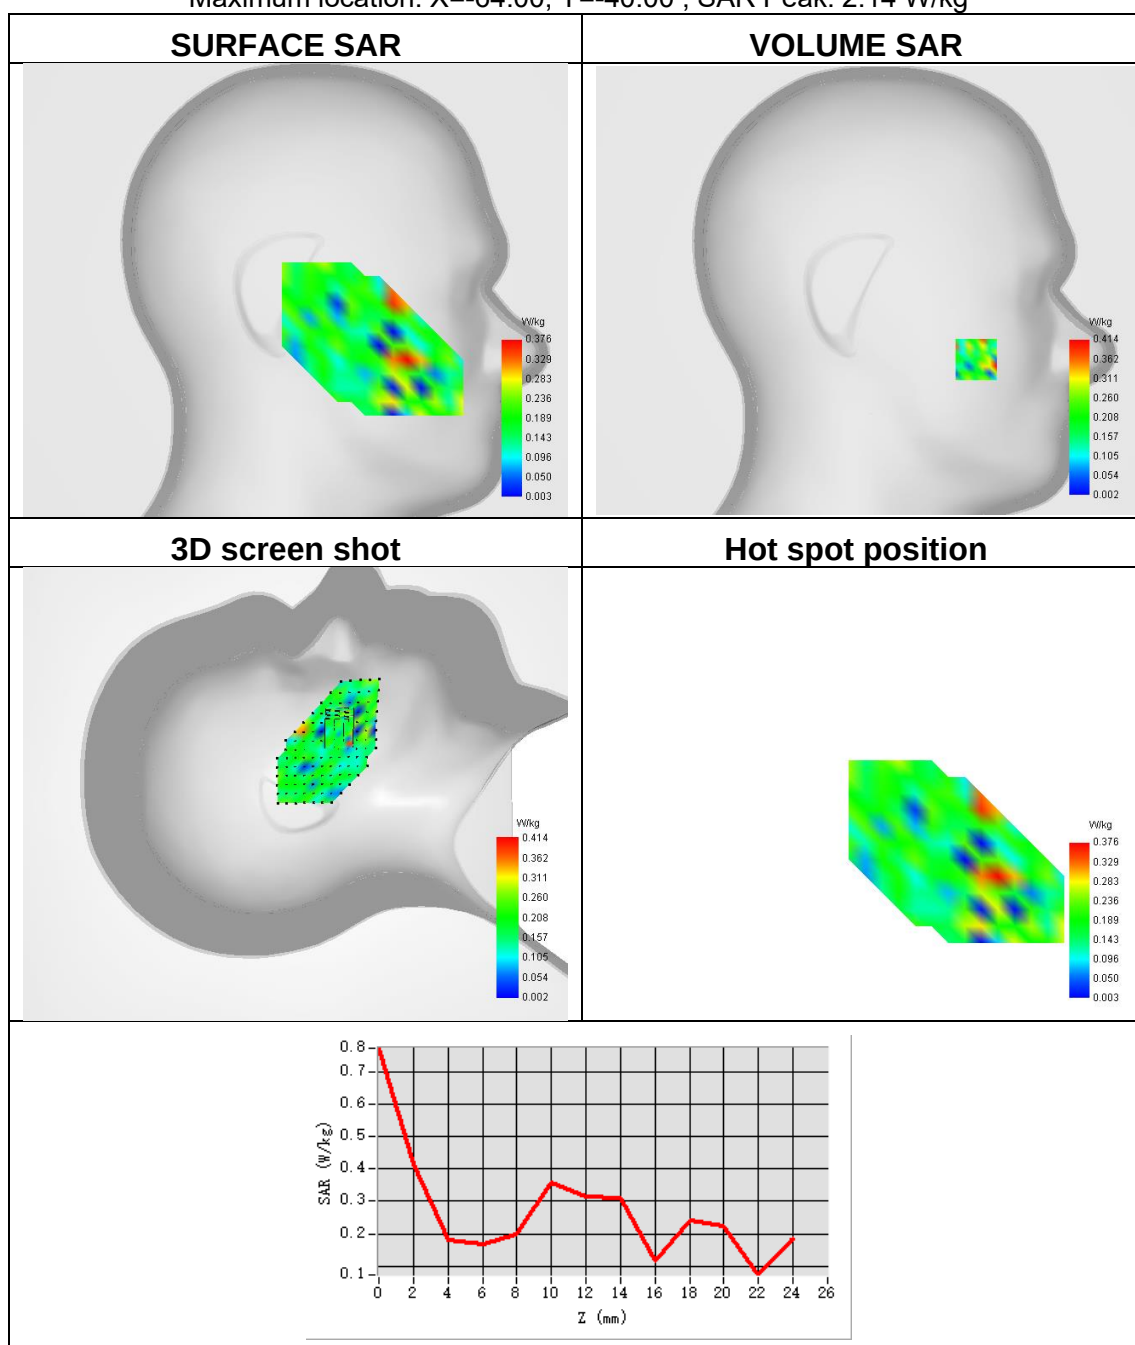




Plot 22:

Test Date	2023-07-21
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right Side
Band	IEEE 802.11 n-HT20 MIMO
Signal	IEEE 802.11
Frequency	5190
SAR 10g (W/Kg)	0.160
SAR 1g (W/Kg)	0.309

Maximum location: X=-39.00, Y=112.00 ; SAR Peak: 1.12 W/kg

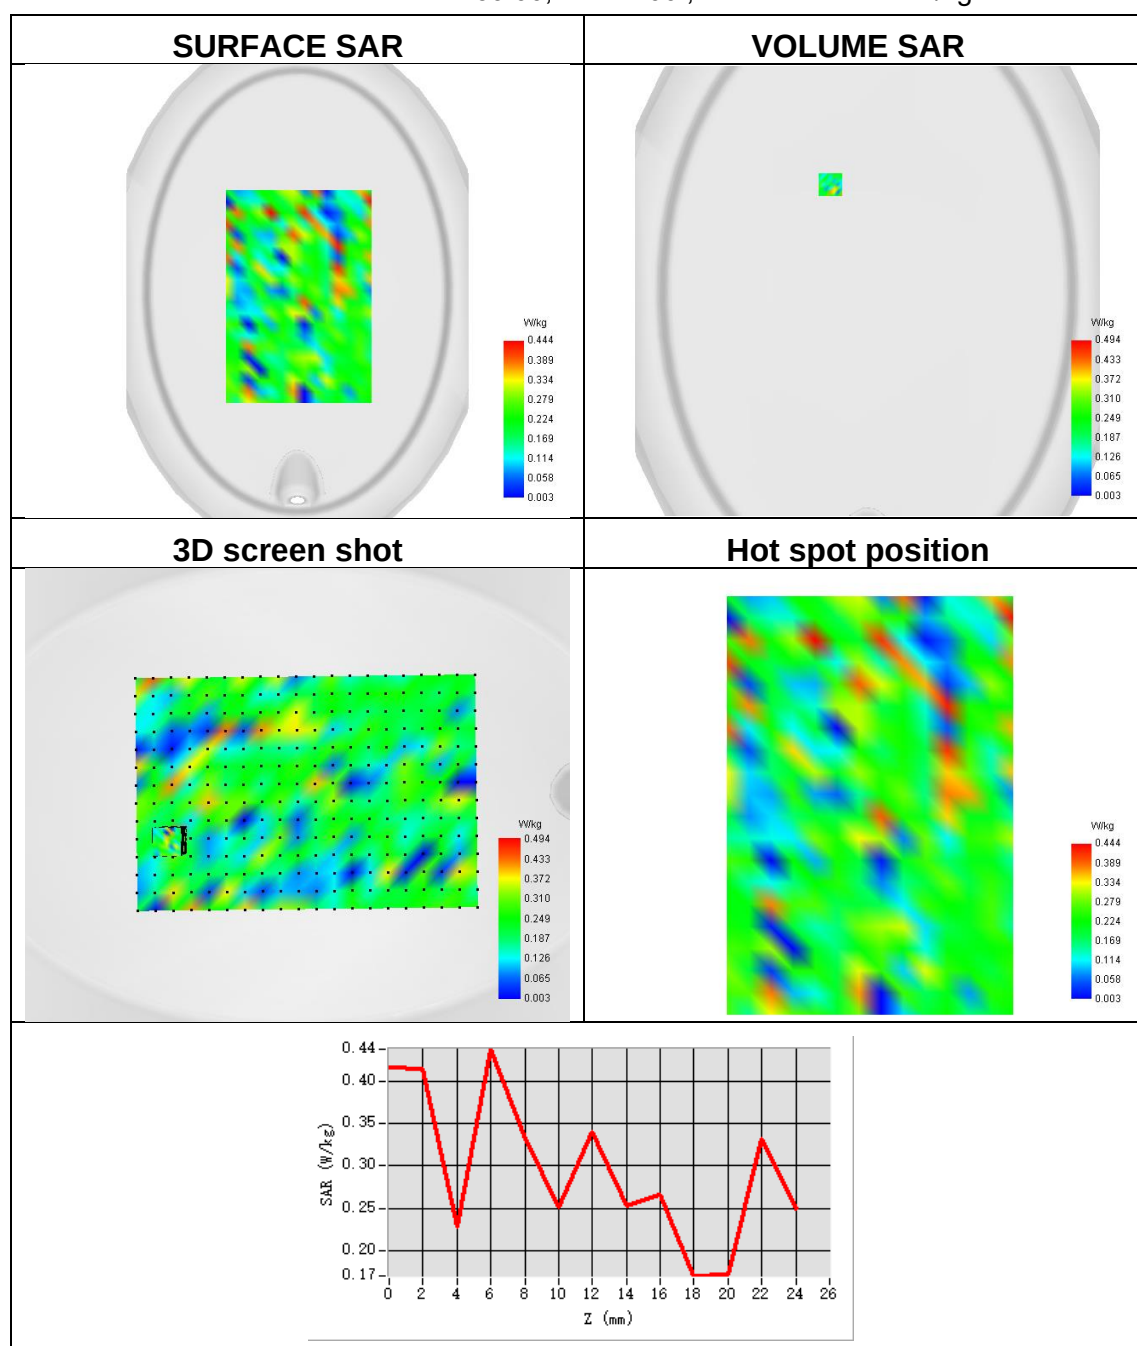




Plot 23:

Test Date	2023-07-21
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	IEEE 802.11a U-NII ANT A
Signal	IEEE 802.11
Frequency	5320
SAR 10g (W/Kg)	0.066
SAR 1g (W/Kg)	0.248

Maximum location: X=-17.00, Y=1.00 ; SAR Peak: 1.52 W/kg

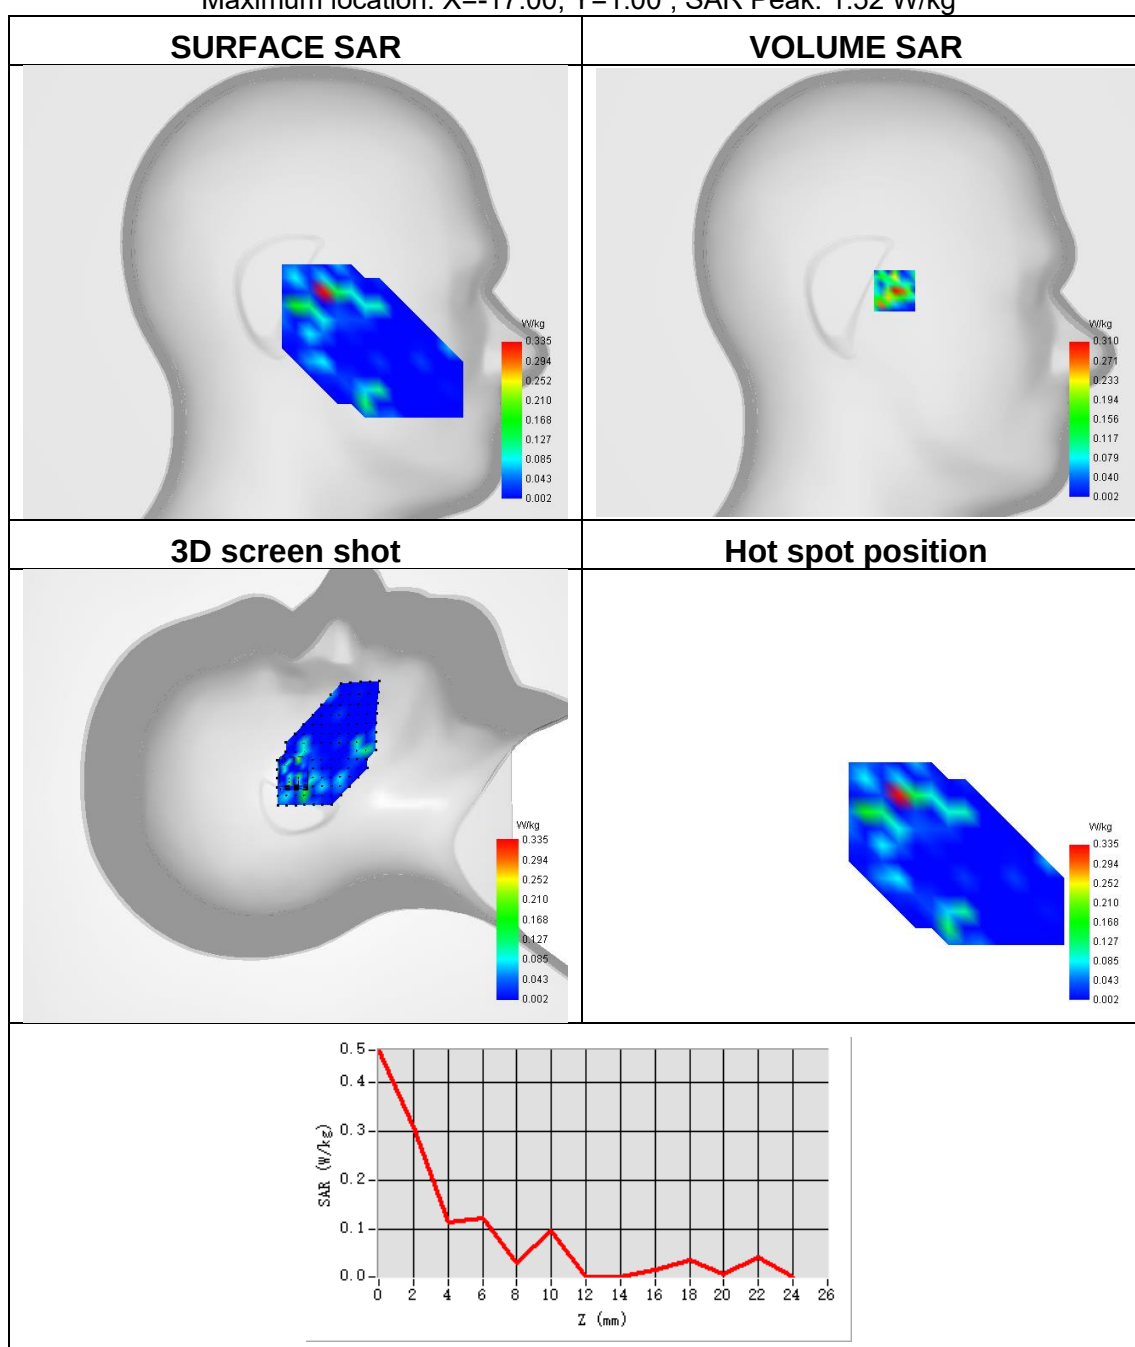




Plot 24:

Test Date	2023-07-21
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	IEEE 802.11a U-NII ANT A
Signal	IEEE 802.11
Frequency	5320
SAR 10g (W/Kg)	0.056
SAR 1g (W/Kg)	0.166

Maximum location: X=-8.00, Y=-41.00 ; SAR Peak: 1.19 W/kg

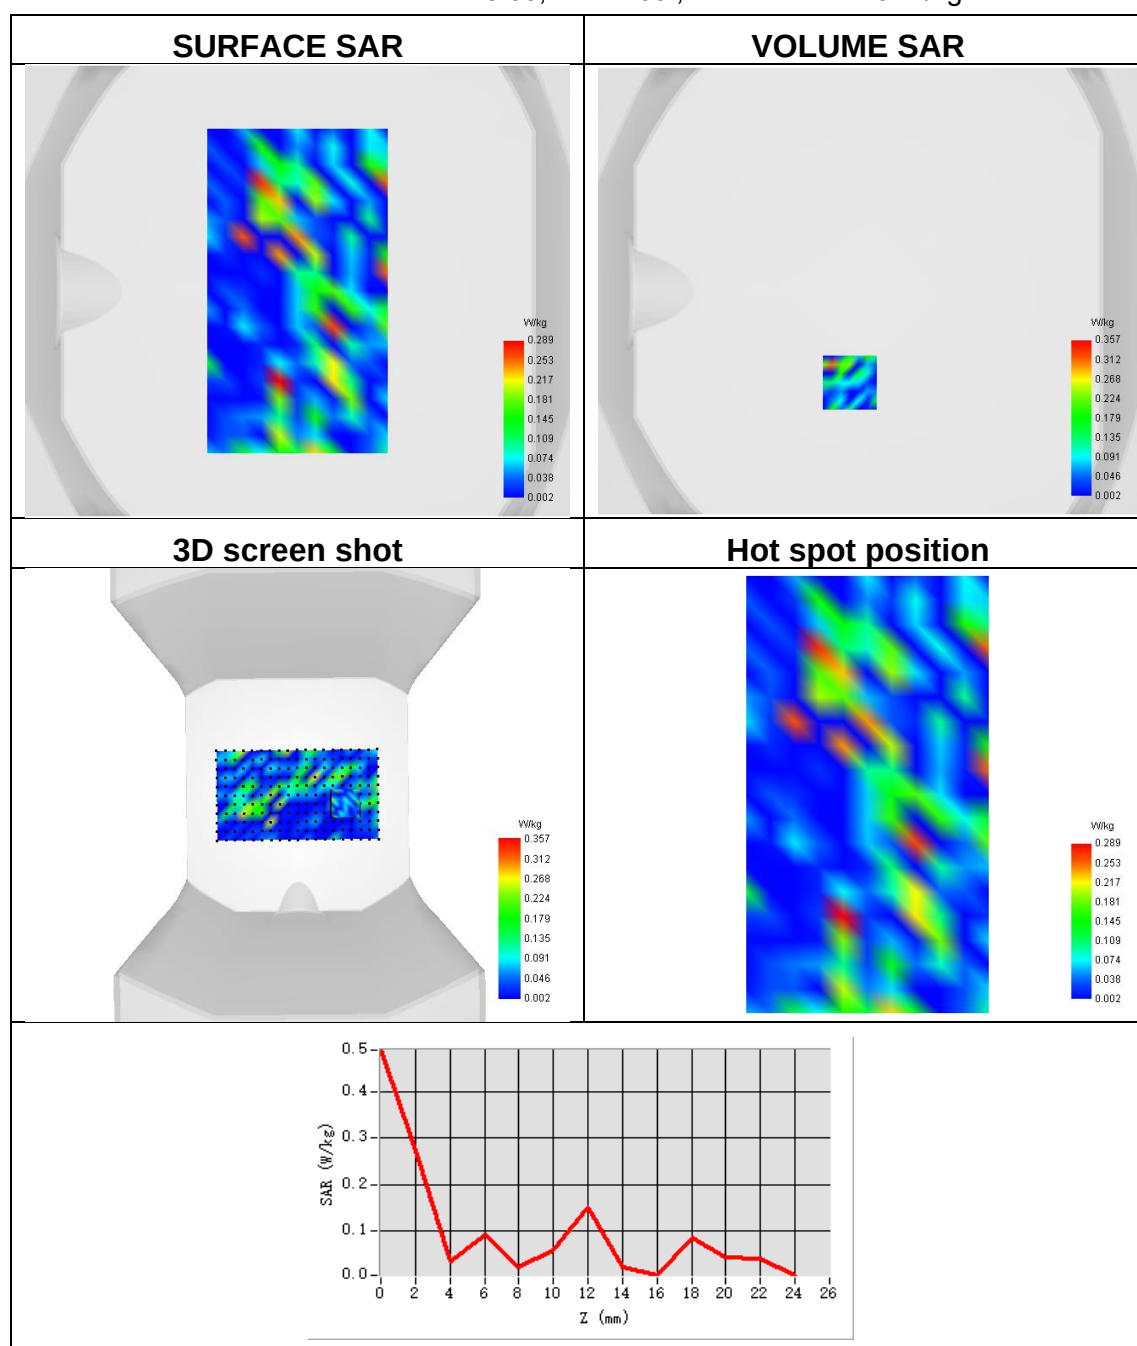




Plot 25:

Test Date	2023-07-22
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	IEEE 802.11a U-NII ANT B
Signal	IEEE 802.11
Frequency	5260
SAR 10g (W/Kg)	0.037
SAR 1g (W/Kg)	0.112

Maximum location: X=-80.00, Y=-41.00 ; SAR Peak: 1.23 W/kg

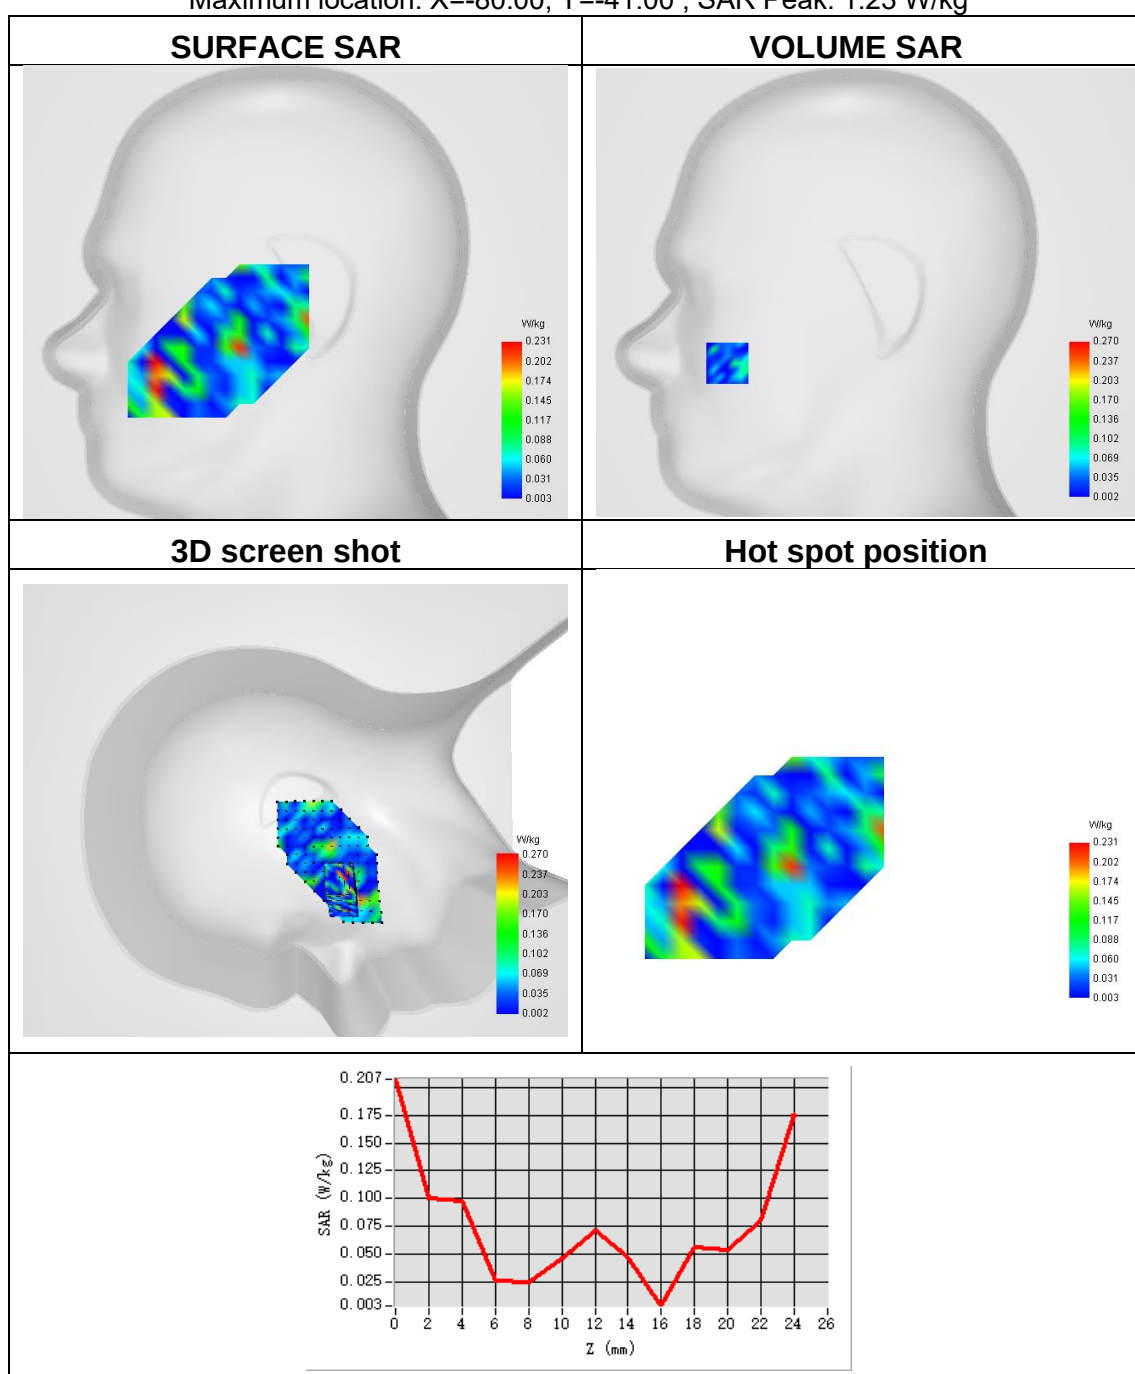




Plot 26:

Test Date	2023-07-22
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right Side
Band	IEEE 802.11a U-NII ANT B
Signal	IEEE 802.11 a
Frequency	5260
SAR 10g (W/Kg)	0.212
SAR 1g (W/Kg)	0.351

Maximum location: X=-6.00, Y=5.00 ; SAR Peak: 1.39 W/kg

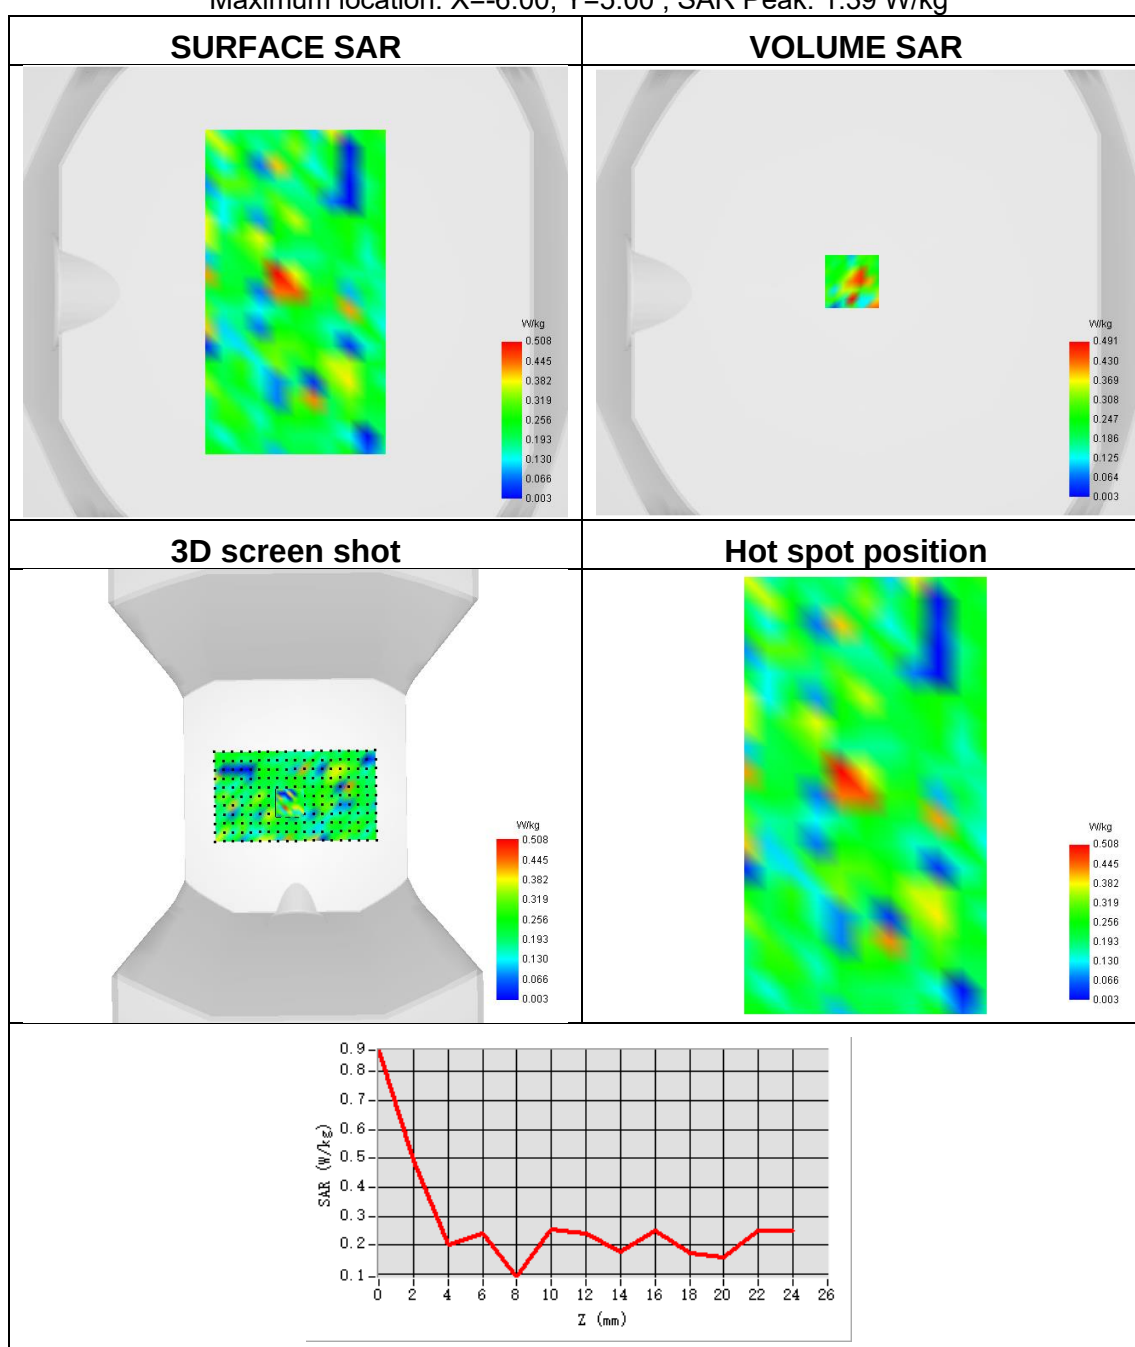




Plot 27:

Test Date	2023-07-22
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	IEEE 802.11n-HT20 MIMO
Signal	IEEE 802.11
Frequency	5320
SAR 10g (W/Kg)	0.123
SAR 1g (W/Kg)	0.242

Maximum location: X=-39.00, Y=-38.00 ; SAR Peak: 1.99 W/kg

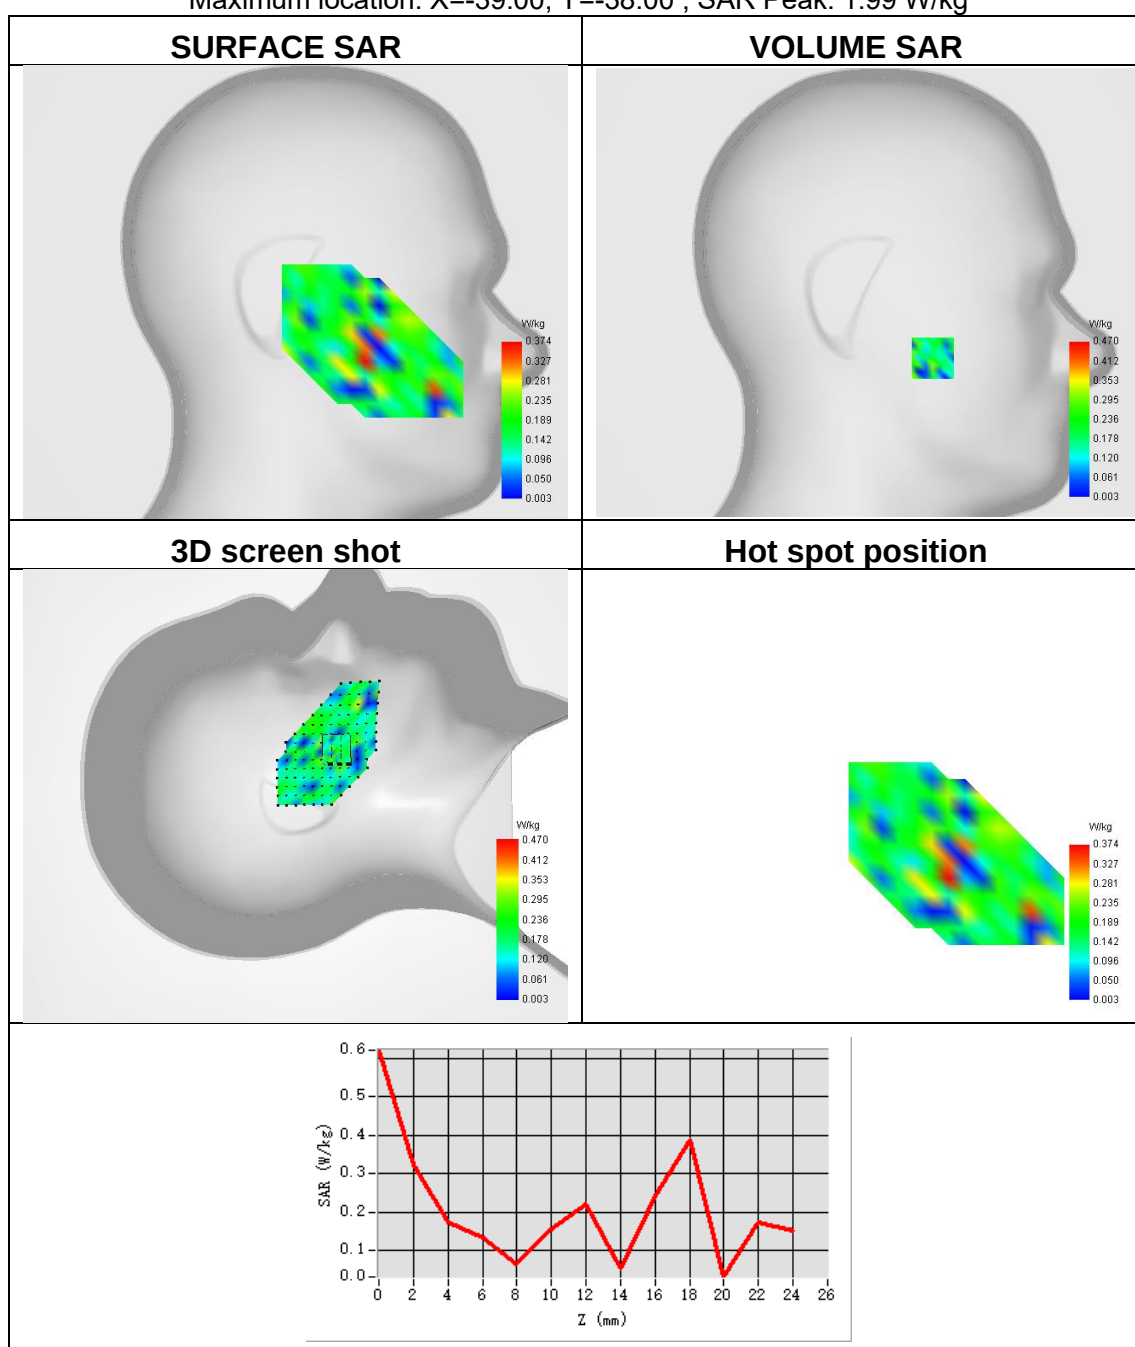




Plot 28:

Test Date	2023-07-22
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right Side
Band	IEEE 802.11 n-HT20 MIMO
Signal	IEEE 802.11
Frequency	5320
SAR 10g (W/Kg)	0.149
SAR 1g (W/Kg)	0.343

Maximum location: X=30.00, Y=65.00 ; SAR Peak: 1.32 W/kg

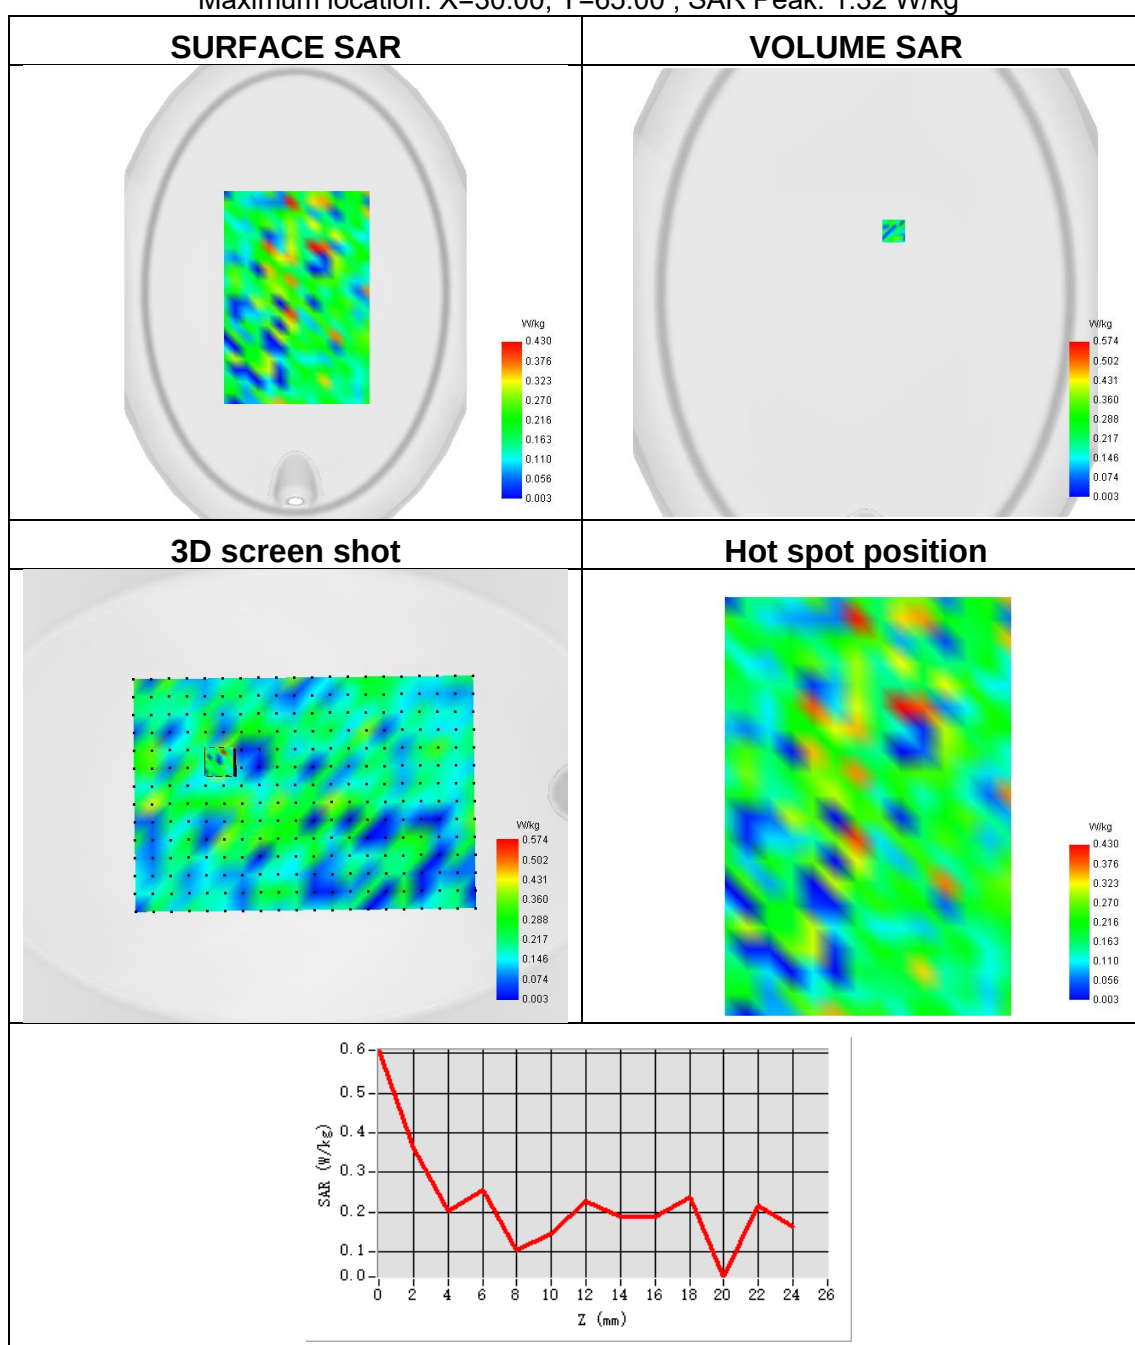




Plot 29:

Test Date	2023-07-24
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	IEEE 802.11n-HT20 ANT A
Signal	IEEE 802.11
Frequency	5700
SAR 10g (W/Kg)	0.098
SAR 1g (W/Kg)	0.296

Maximum location: X=-16.00, Y=-11.00 ; SAR Peak: 2.60 W/kg

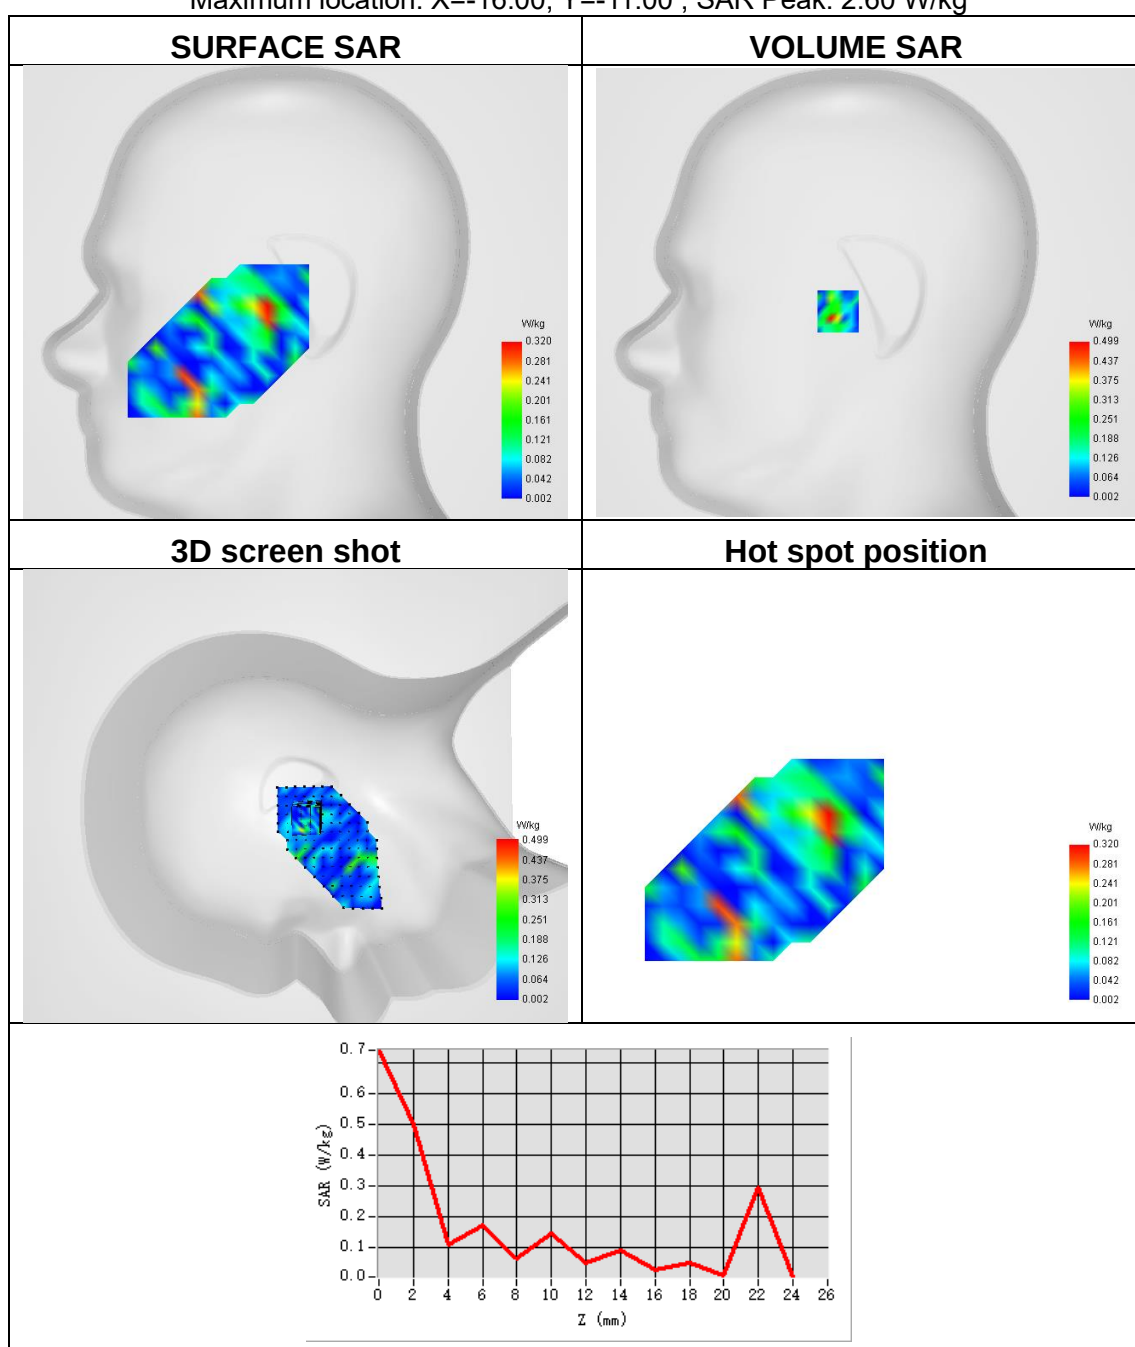




Plot 30:

Test Date	2023-07-24
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11 n-HT20 ANT A
Signal	IEEE 802.11
Frequency	5700
SAR 10g (W/Kg)	0.062
SAR 1g (W/Kg)	0.172

Maximum location: X=-9.00, Y=8.00 ; SAR Peak: 0.48 W/kg

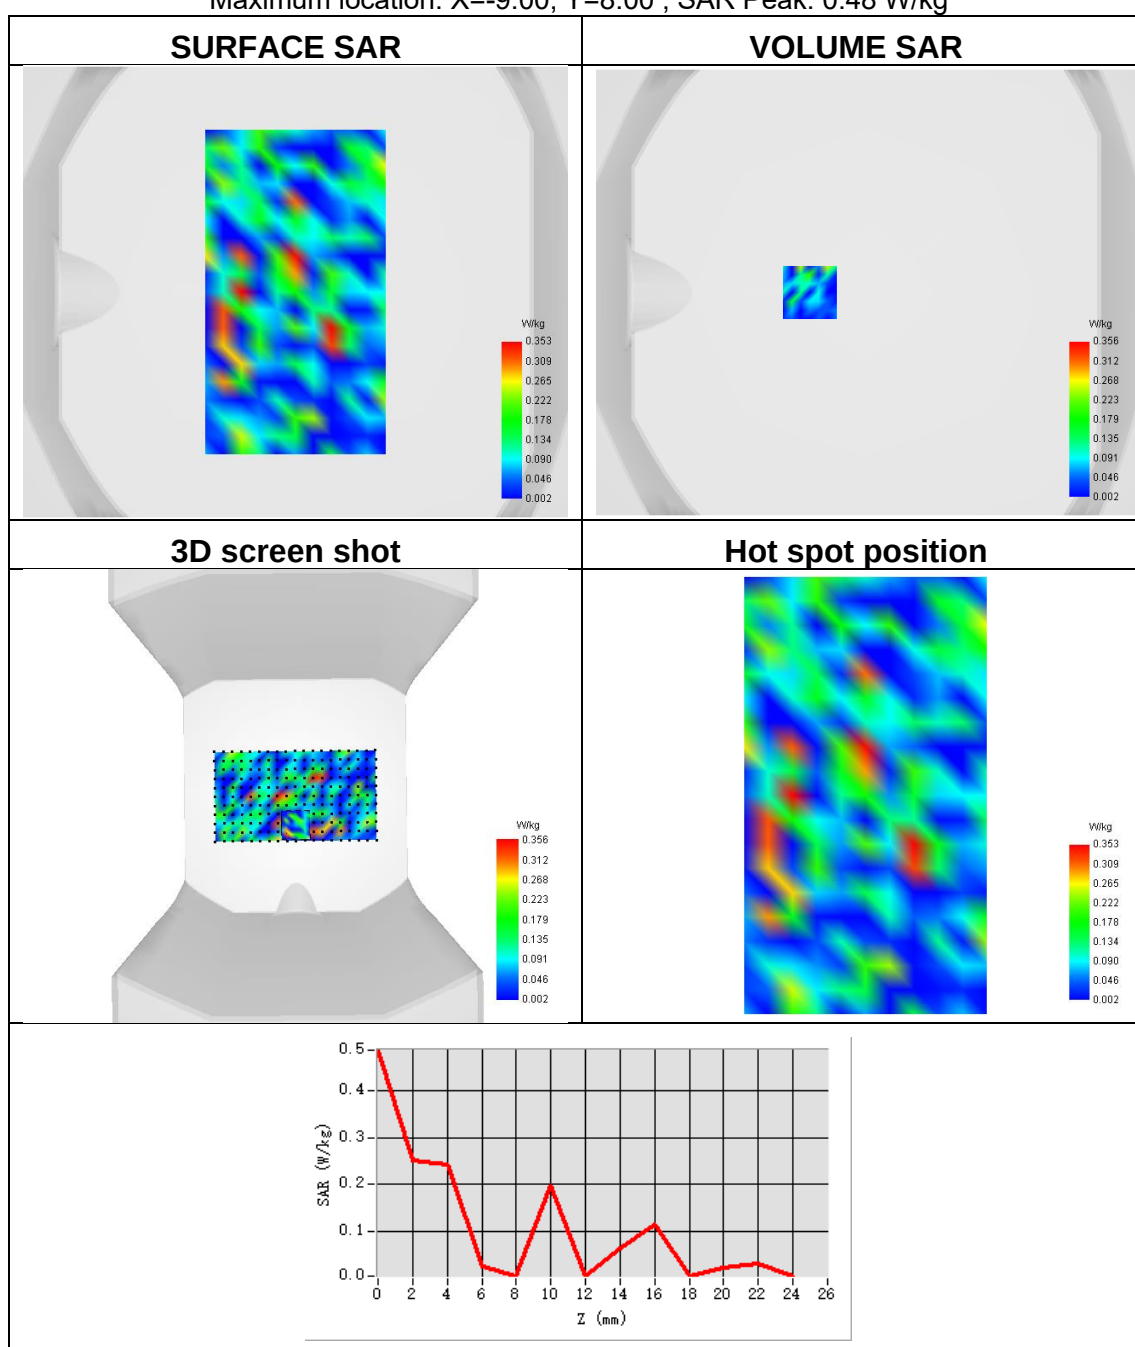




Plot 31:

Test Date	2023-07-24
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	IEEE 802.11n-HT20 ANT B
Signal	IEEE 802.11
Frequency	5700
SAR 10g (W/Kg)	0.075
SAR 1g (W/Kg)	0.211

Maximum location: X=-40.00, Y=-41.00 ; SAR Peak: 1.75 W/kg

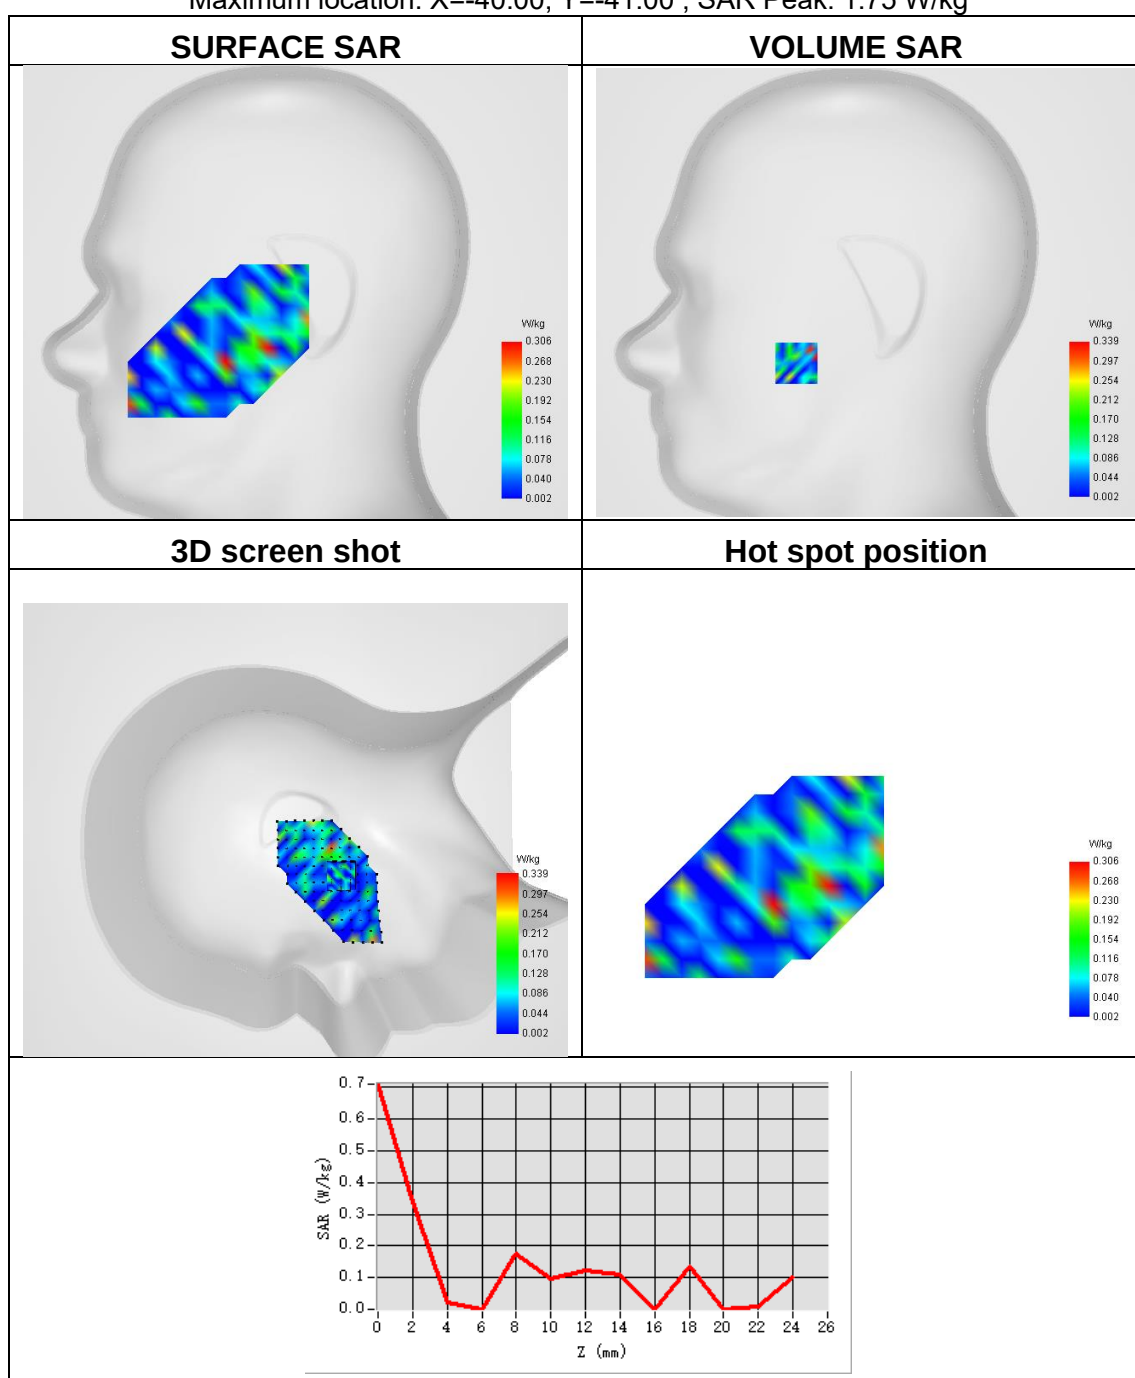




Plot 32:

Test Date	2023-07-24
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right Side
Band	IEEE 802.11 n-HT20 ANT B
Signal	IEEE 802.11
Frequency	5510.000
SAR 10g (W/Kg)	0.170
SAR 1g (W/Kg)	0.284

Maximum location: X=24.00, Y=23.00 ; SAR Peak: 2.00 W/kg

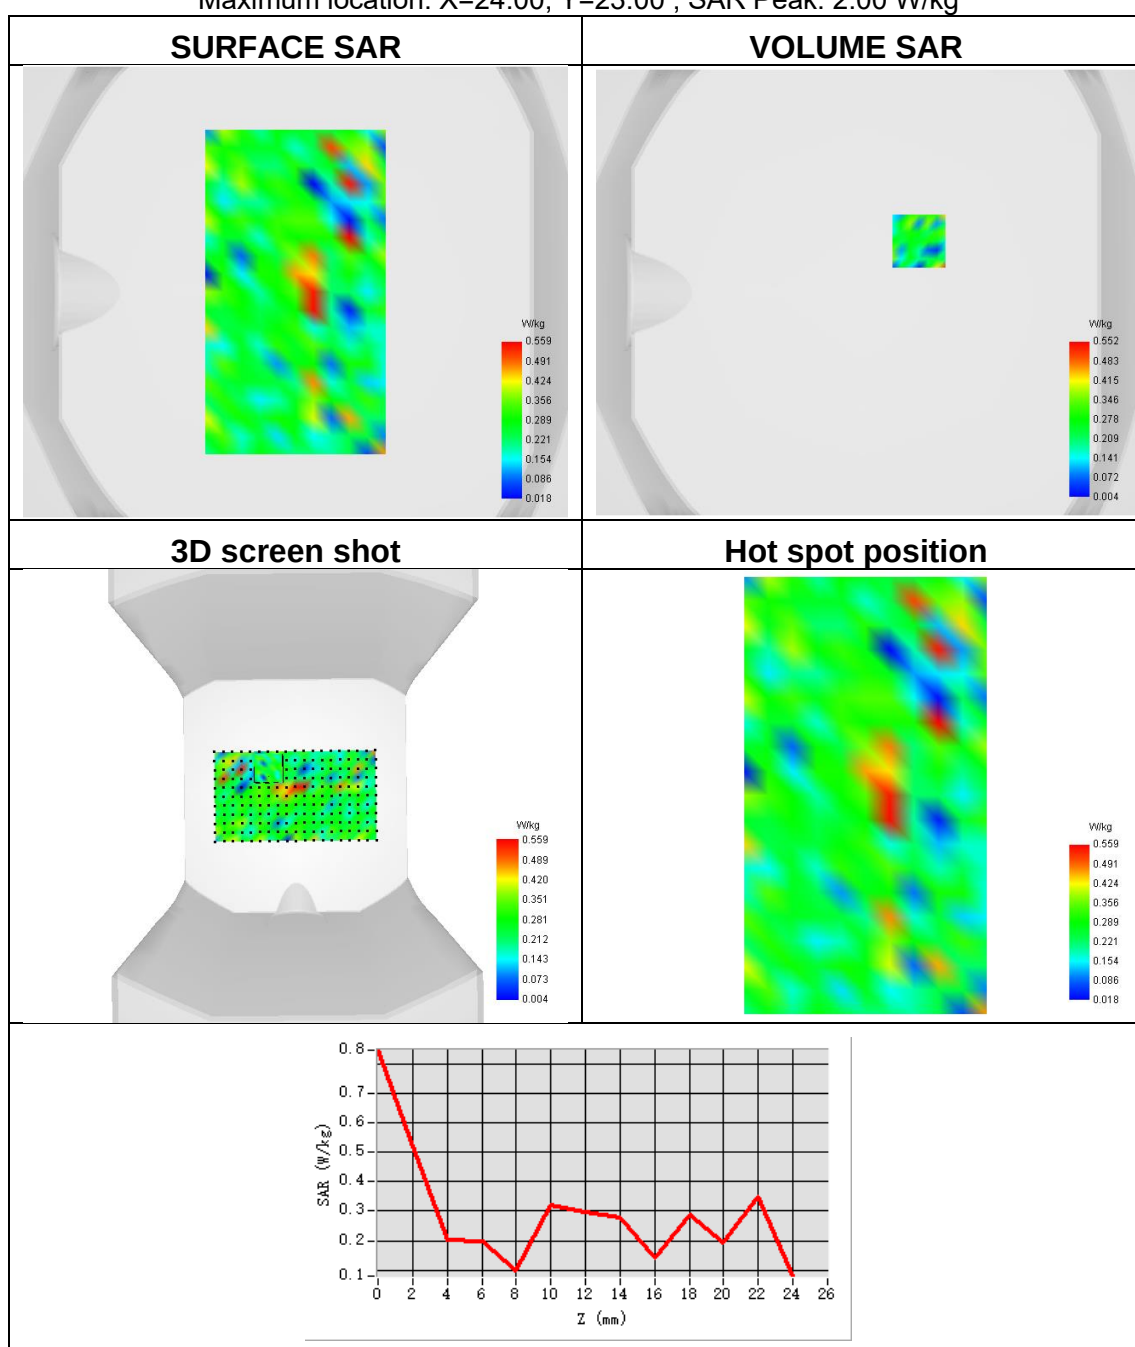




Plot 33:

Test Date	2023-07-25
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	IEEE 802.11n-HT20 MIMO
Signal	IEEE 802.11
Frequency	5700
SAR 10g (W/Kg)	0.172
SAR 1g (W/Kg)	0.396

Maximum location: X=-24.00, Y=-32.00 ; SAR Peak: 3.60 W/kg

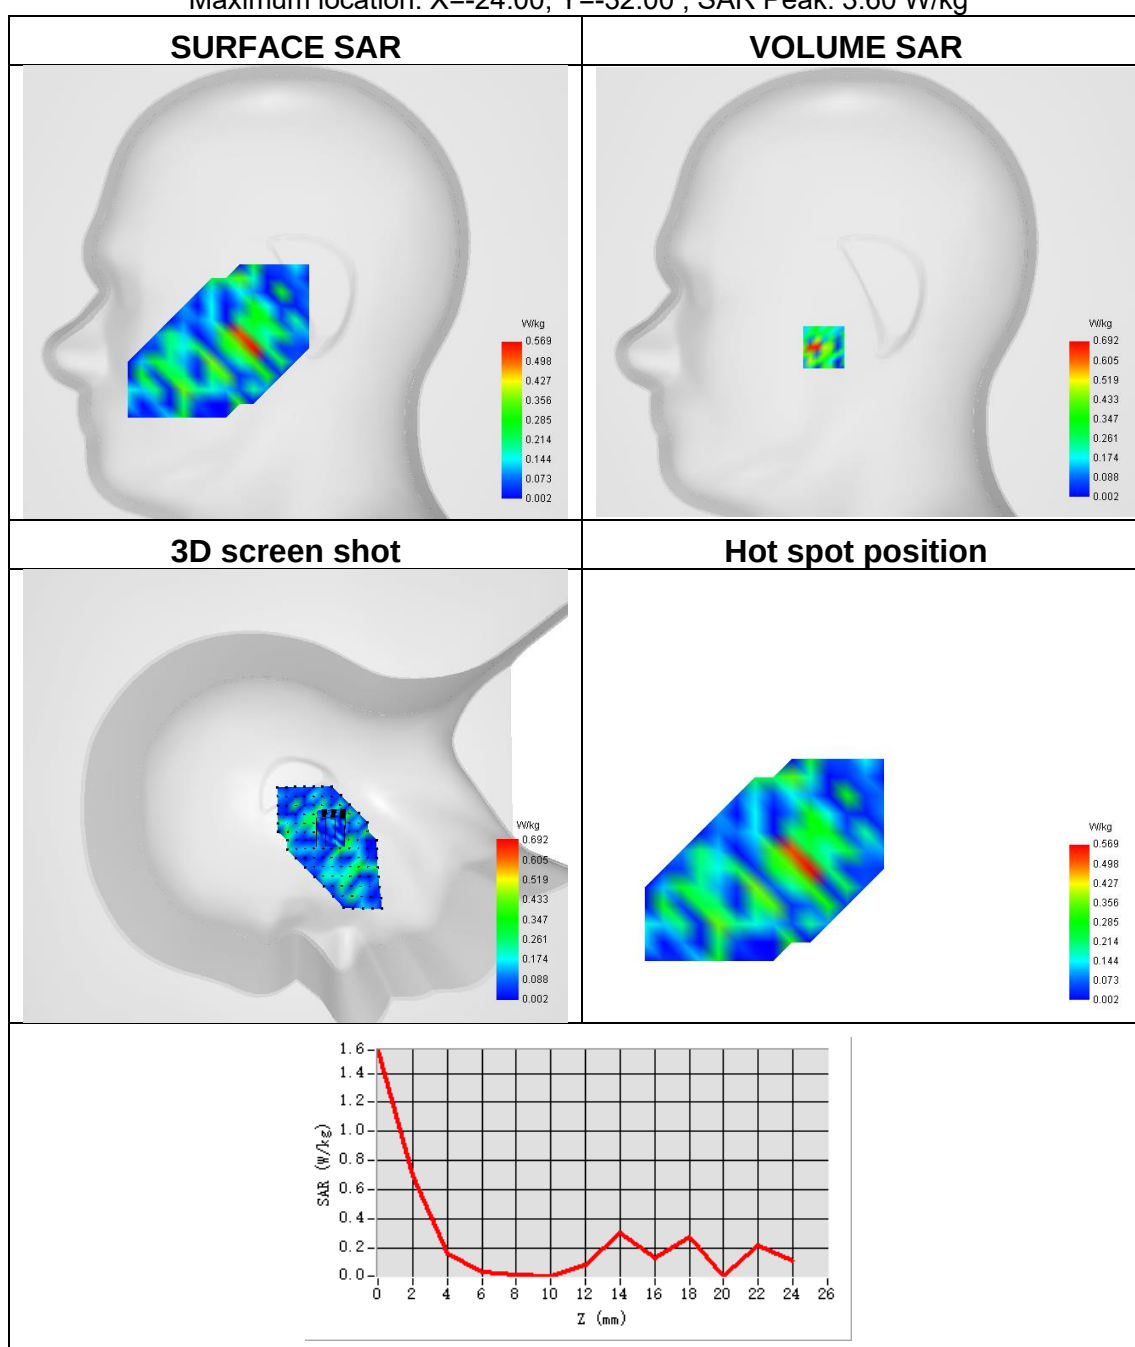




Plot 34:

Test Date	2023-07-25
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	IEEE 802.11n U-NII MIMO
Signal	IEEE 802.11
Frequency	5700
SAR 10g (W/Kg)	0.157
SAR 1g (W/Kg)	0.341

Maximum location: X=74.00, Y=-113.00 ; SAR Peak: 1.81 W/kg

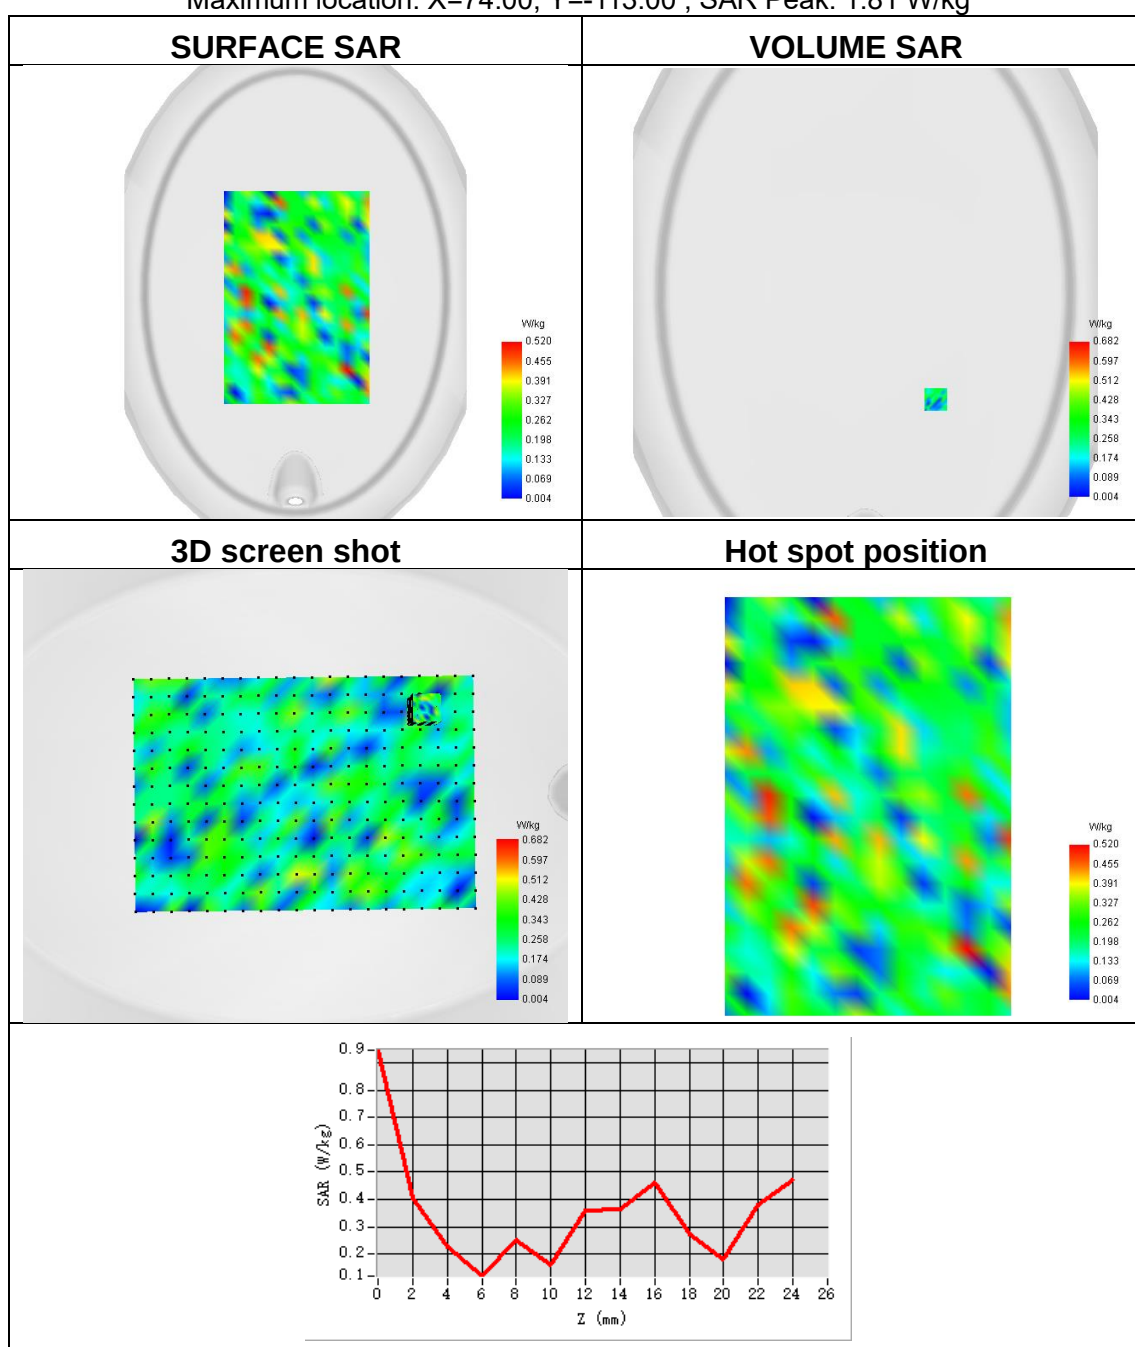




Plot 35:

Test Date	2023-07-26
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	IEEE 802.11a U-NII ANT A
Signal	IEEE 802.11
Frequency	5745
SAR 10g (W/Kg)	0.127
SAR 1g (W/Kg)	0.298

Maximum location: X=-54.00, Y=-23.00 ; SAR Peak: 0.15 W/kg

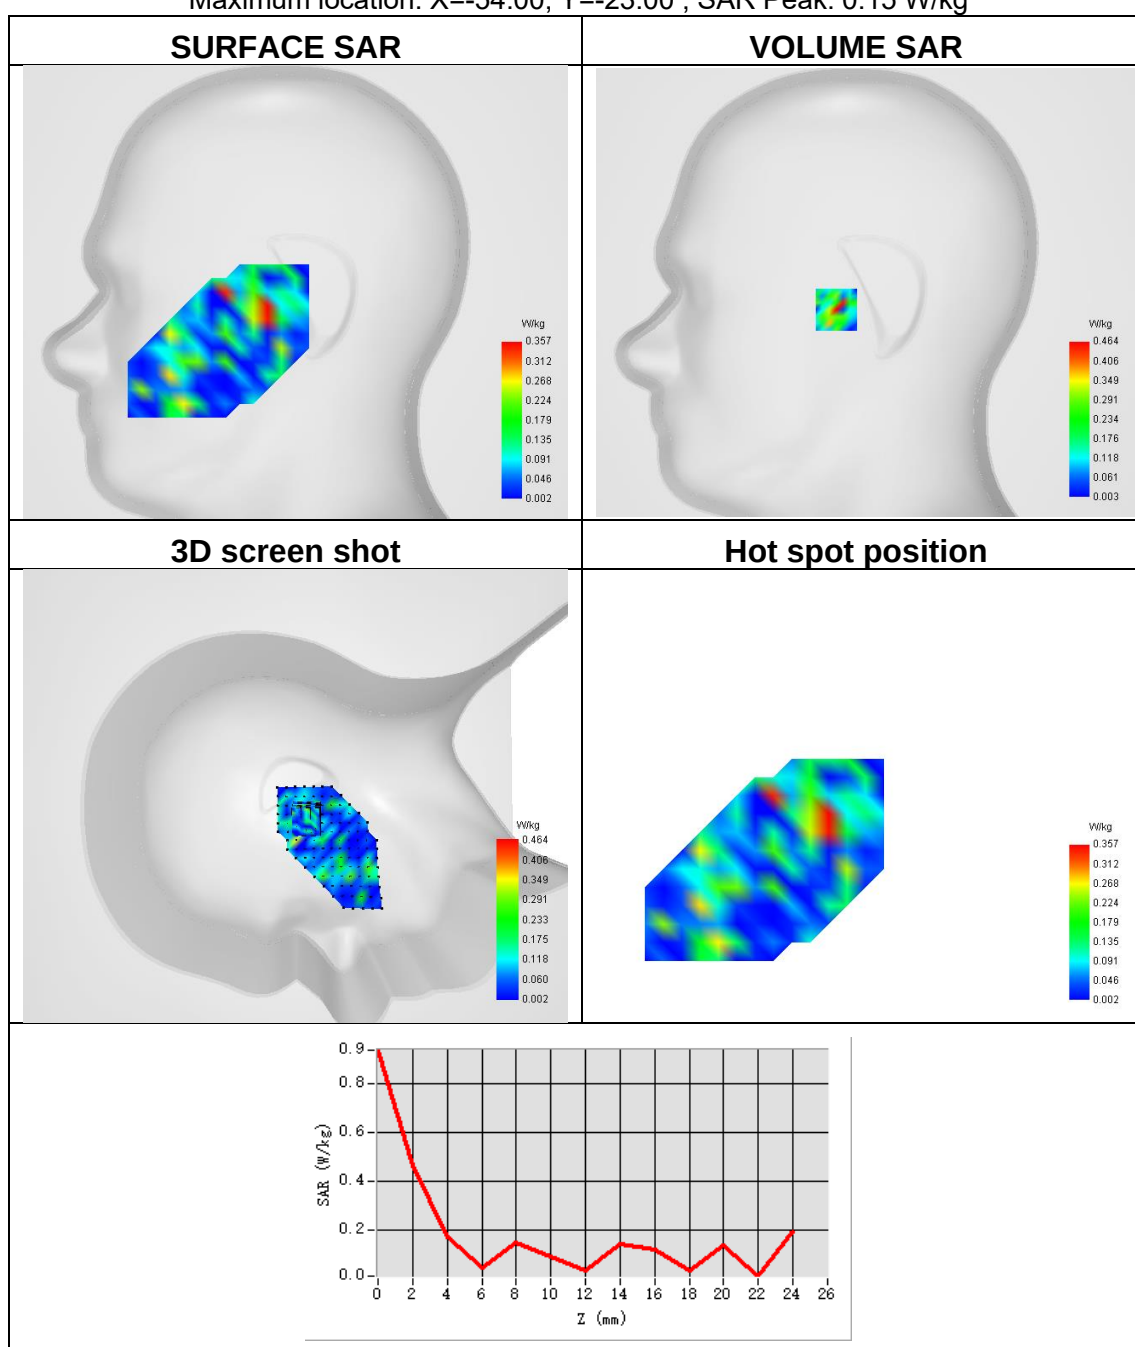




Plot 36:

Test Date	2023-07-26
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a U-NII ANT A
Signal	IEEE 802.11
Frequency	5745
SAR 10g (W/Kg)	0.181
SAR 1g (W/Kg)	0.318

Maximum location: X=7.00, Y=50.00 ; SAR Peak: 0.48 W/kg

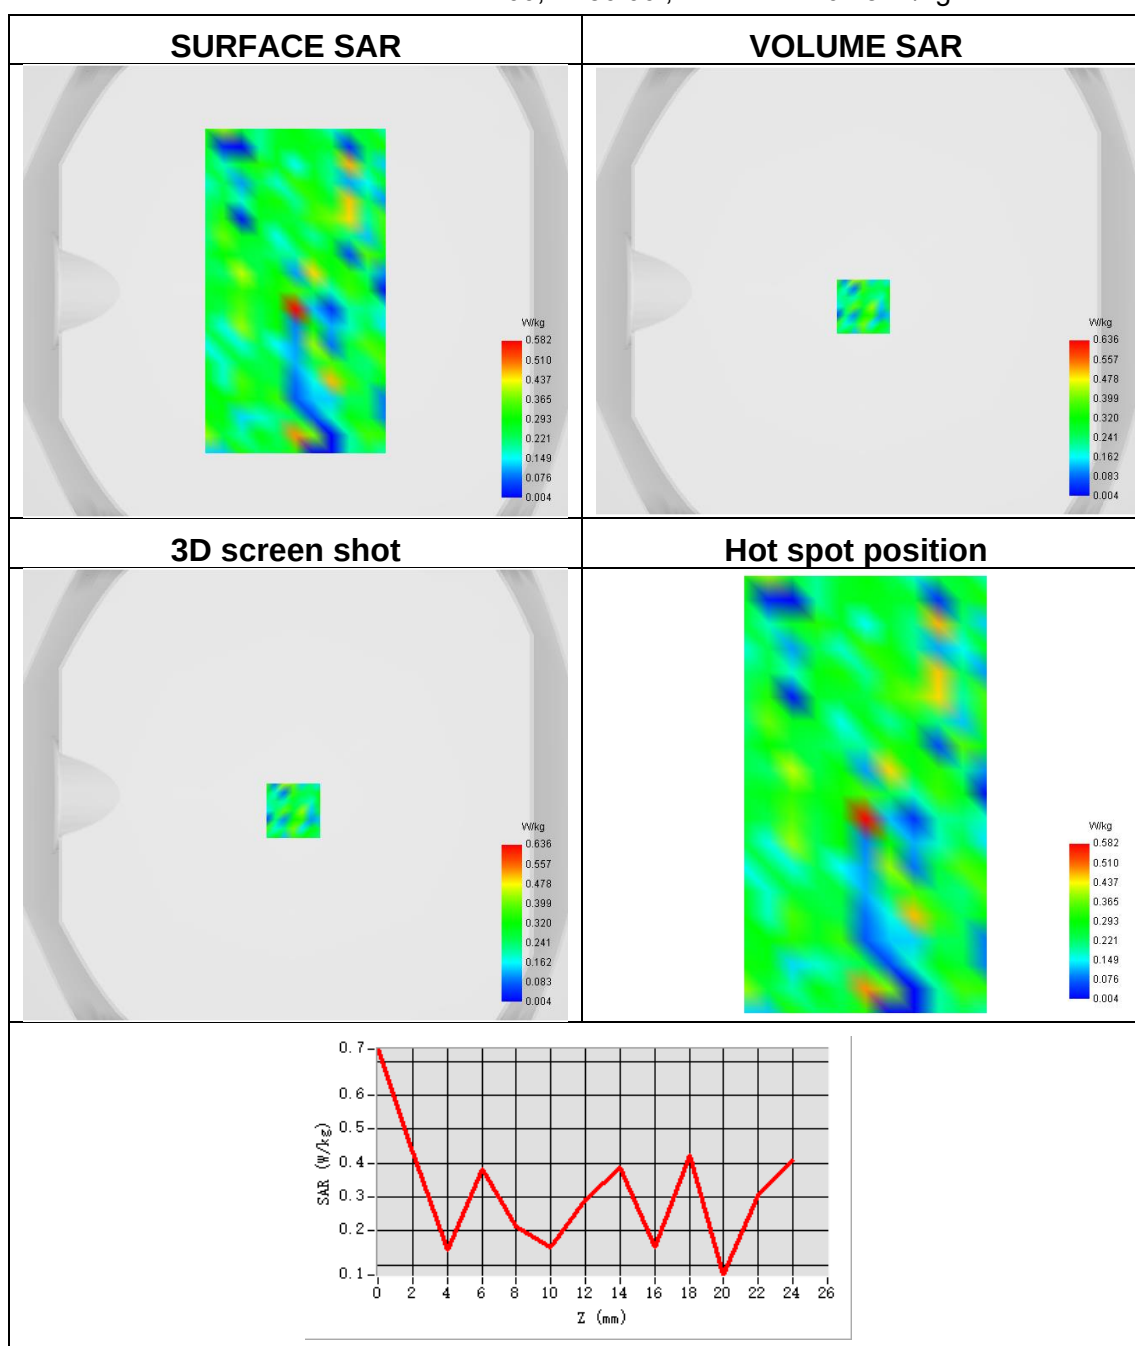




Plot 37:

Test Date	2023-07-26
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	IEEE 802.11n-HT20 ANT B
Signal	IEEE 802.11
Frequency	5745
SAR 10g (W/Kg)	0.079
SAR 1g (W/Kg)	0.305

Maximum location: X=-56.00, Y=-32.00 ; SAR Peak: 2.26 W/kg

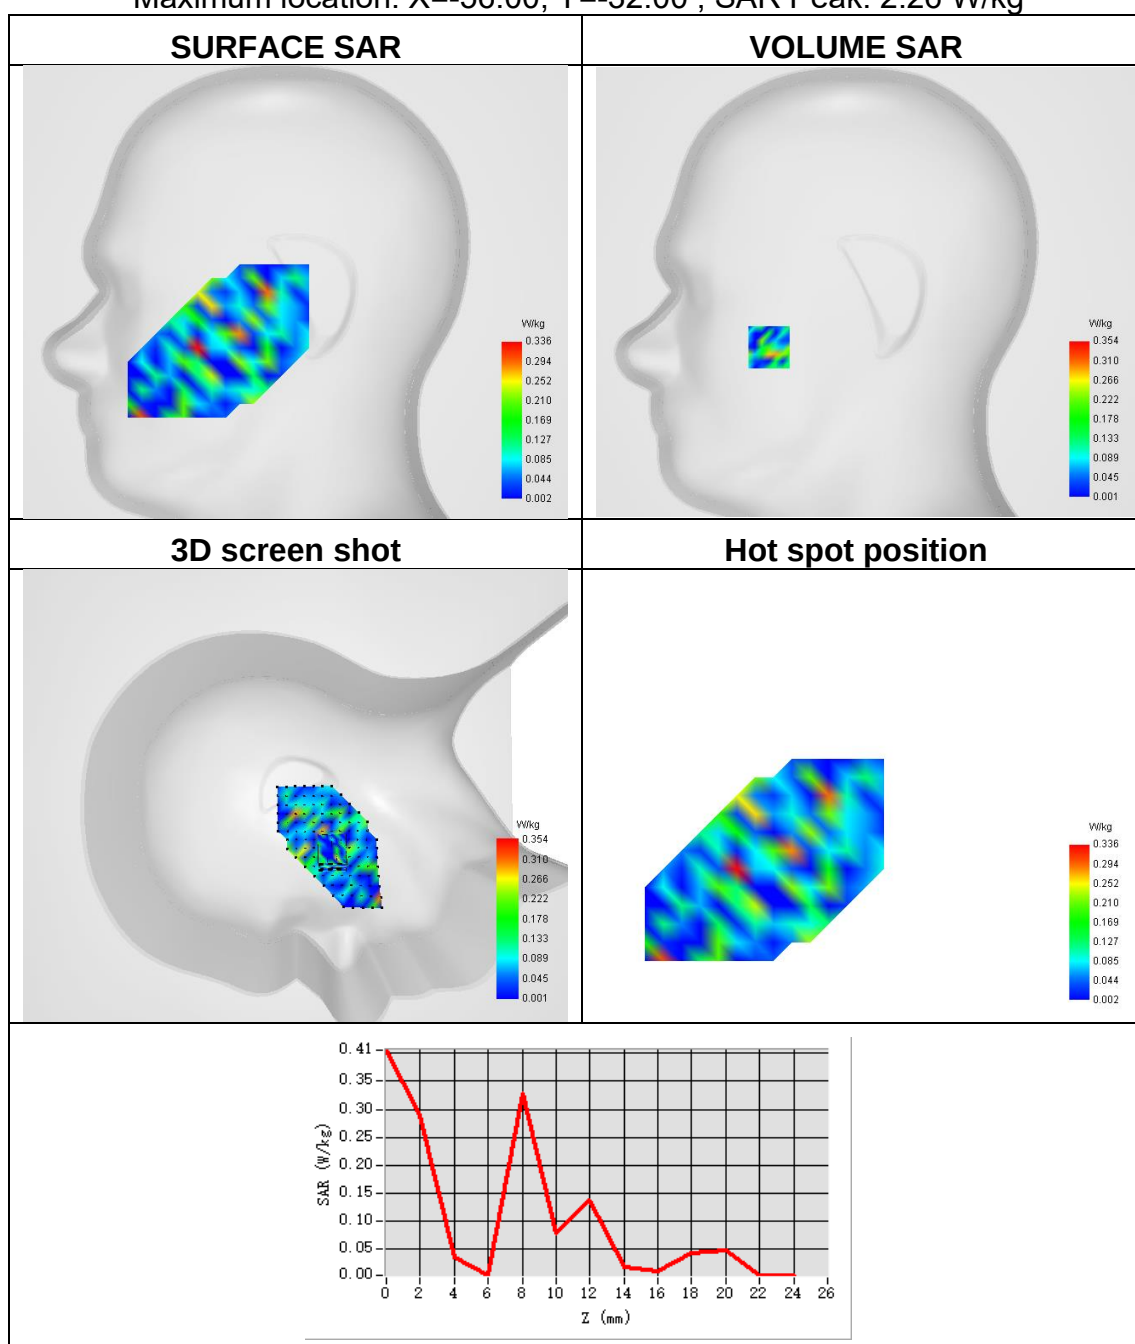




Plot 38:

Test Date	2023-07-26
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right Side
Band	IEEE 802.11n-HT20 ANT B
Signal	IEEE 802.11
Frequency	5745
SAR 10g (W/Kg)	0.171
SAR 1g (W/Kg)	0.296

Maximum location: X=16.00, Y=48.00 ; SAR Peak: 2.03 W/kg

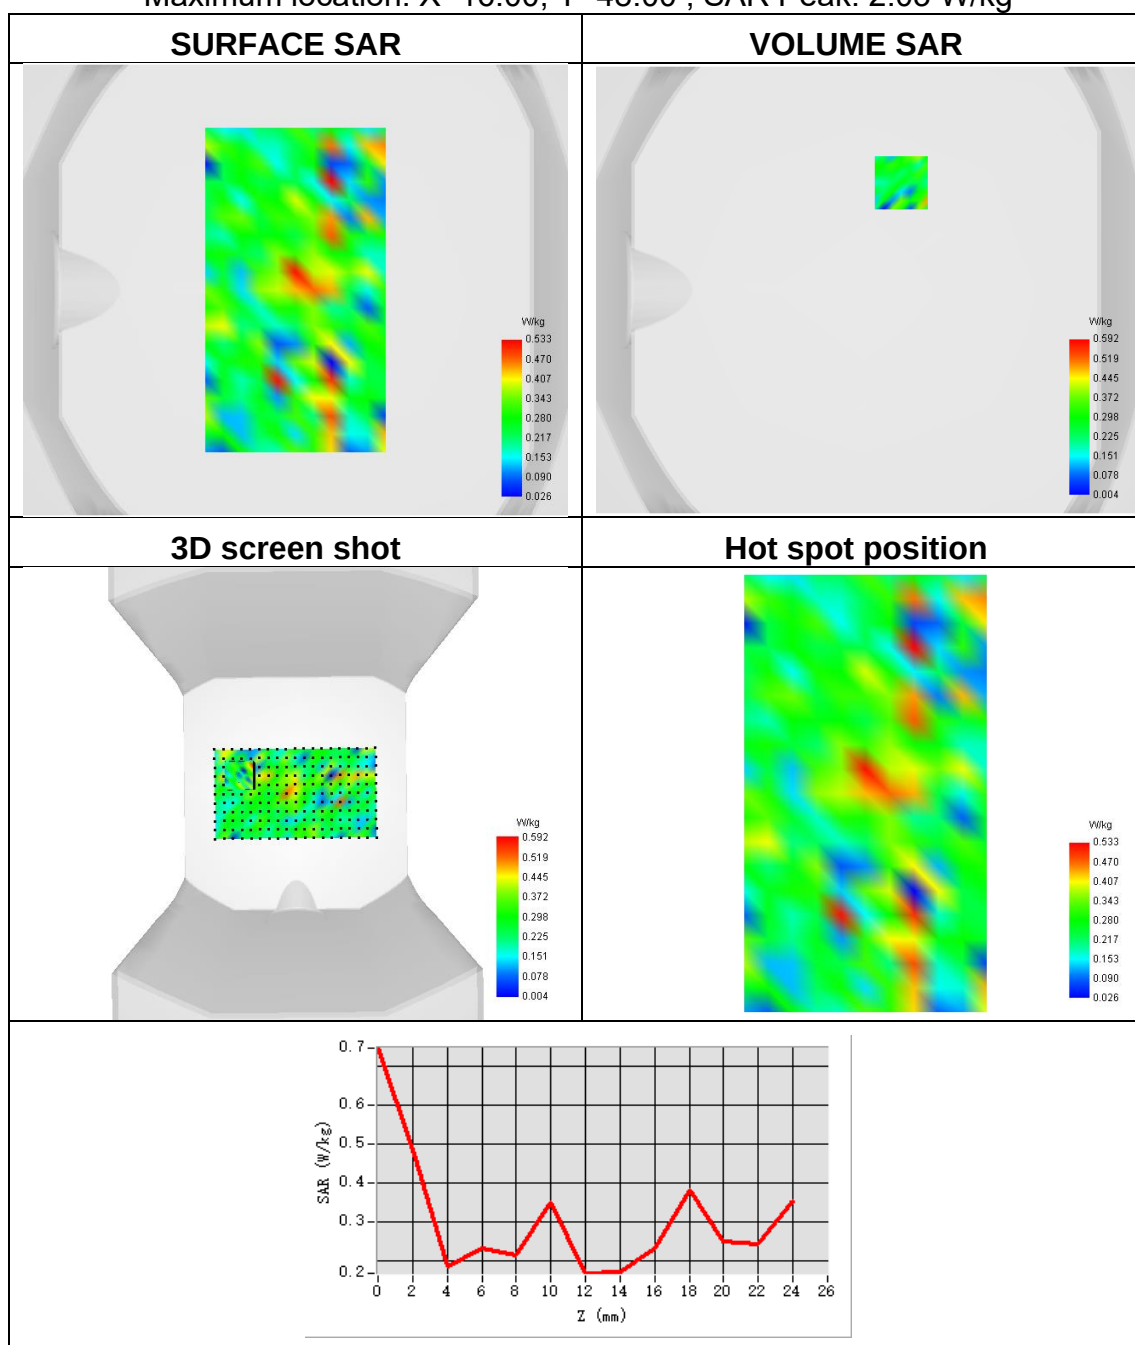




Plot 39:

Test Date	2023-07-25
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	IEEE 802.11n-HT20 MIMO
Signal	IEEE 802.11
Frequency	5785
SAR 10g (W/Kg)	0.382
SAR 1g (W/Kg)	0.967

Maximum location: X=-25.00, Y=-8.00 ; SAR Peak: 2.43 W/kg

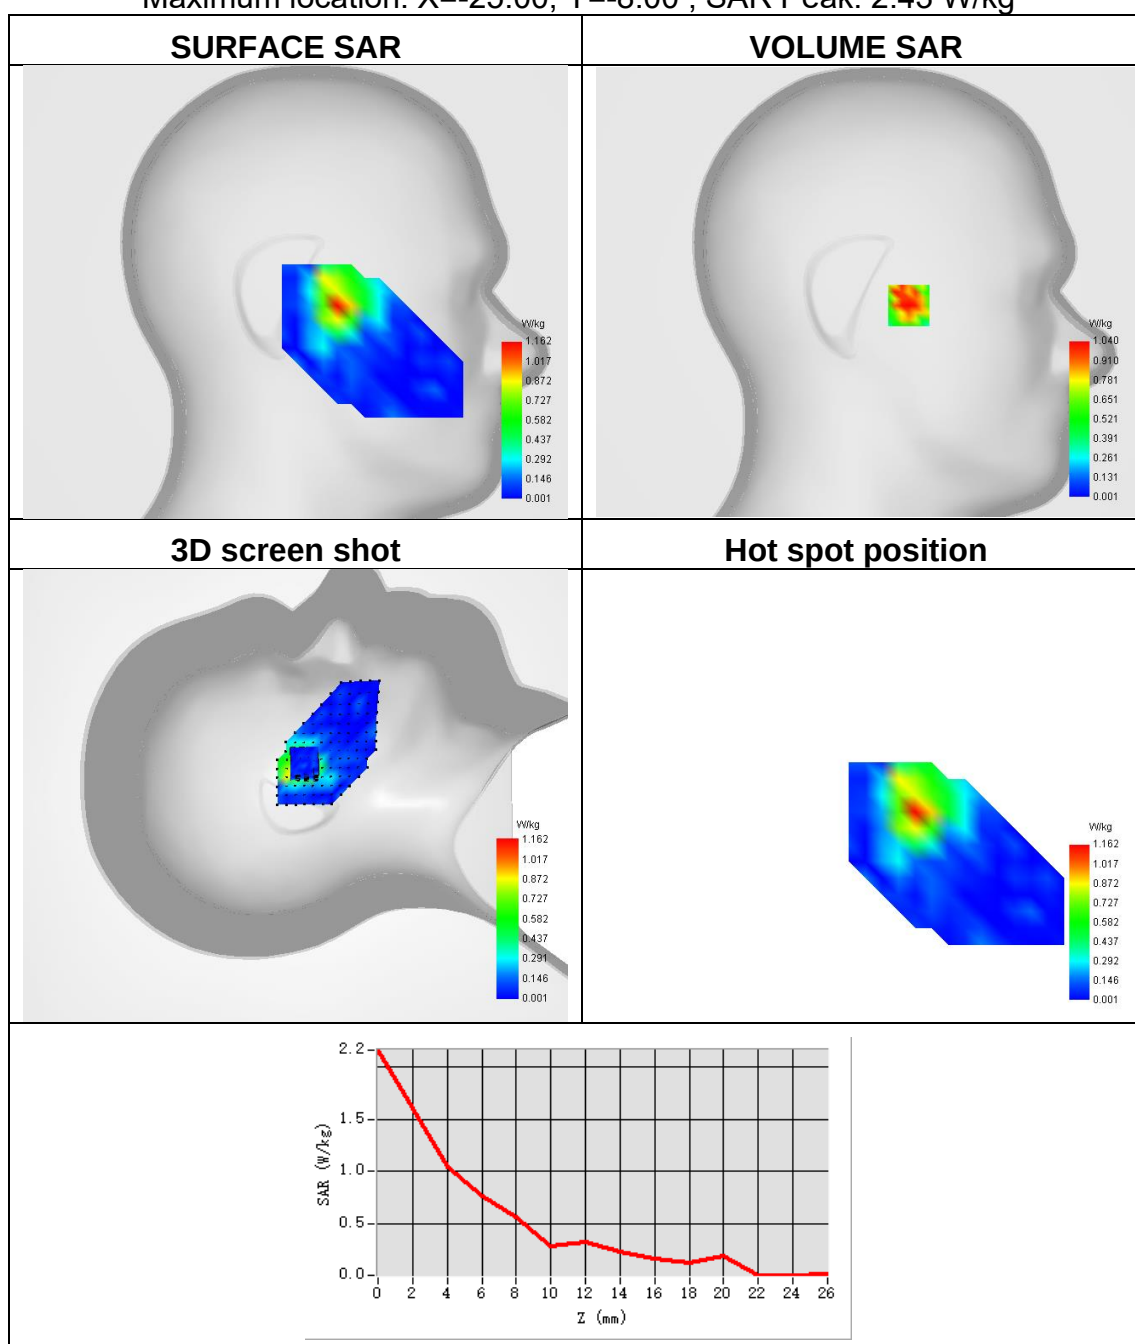




Plot 40:

Test Date	2023-07-25
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right Side
Band	IEEE 802.11 n-HT20 MIMO
Signal	IEEE 802.11
Frequency	5785
SAR 10g (W/Kg)	0.202
SAR 1g (W/Kg)	0.355

Maximum location: X=-5.00, Y=113.00 ; SAR Peak: 2.50 W/kg

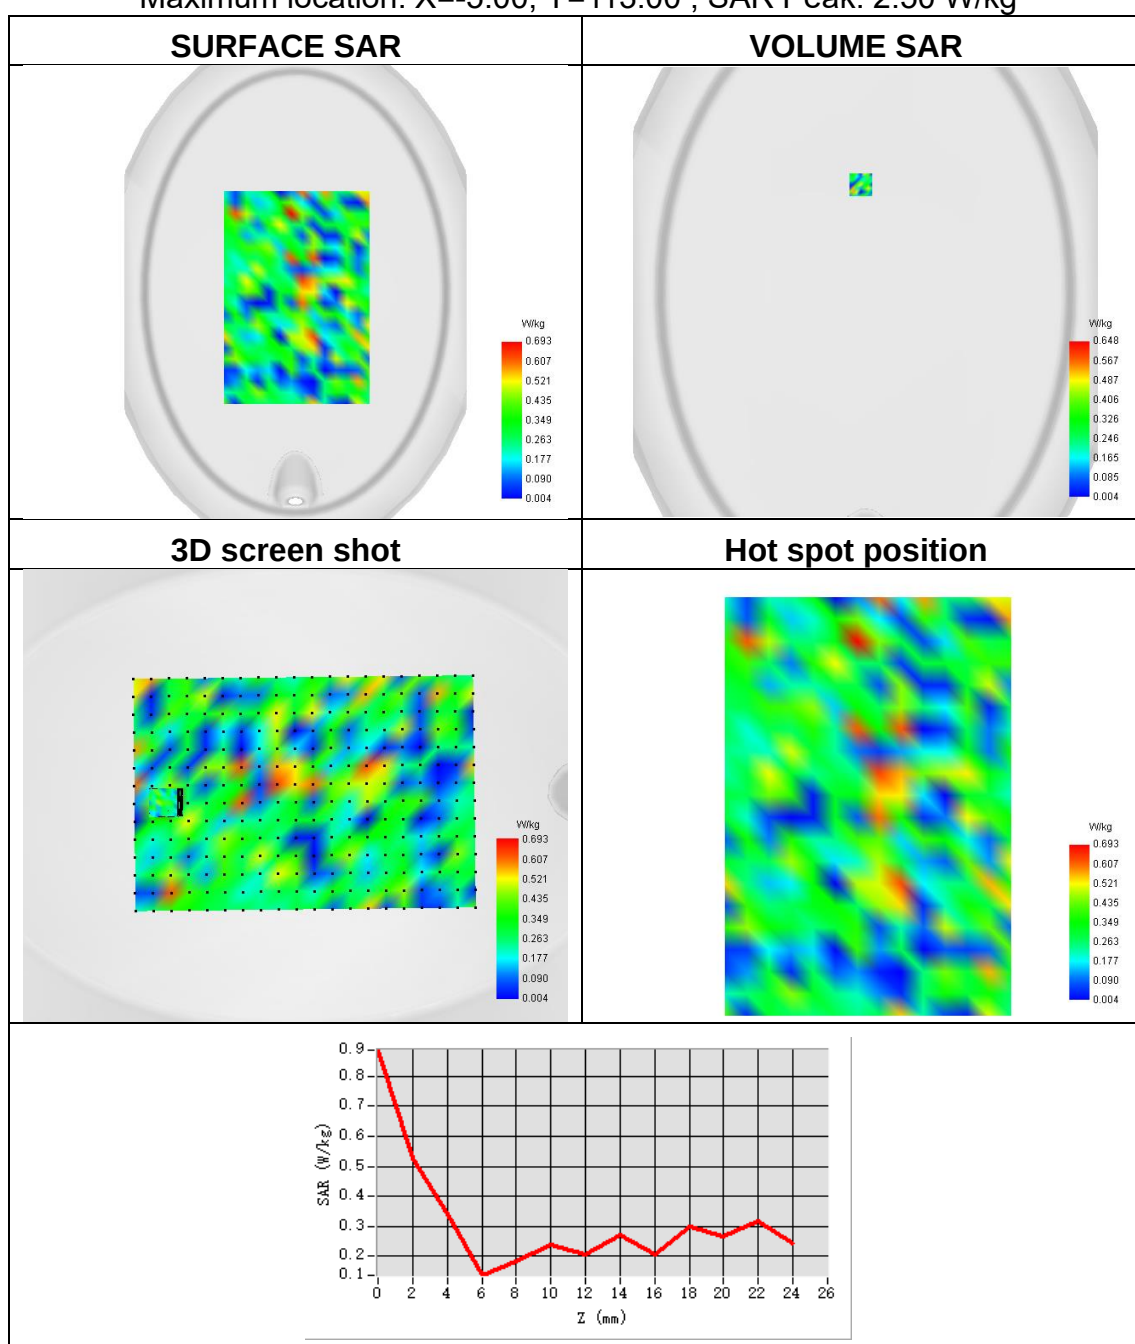




Plot 41:

Test Date	2023-07-14
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	Bluetooth
Signal	GFSK
Frequency	2441
SAR 10g (W/Kg)	0.022
SAR 1g (W/Kg)	0.044

Maximum location: X=-56.00, Y=-56.00 ; SAR Peak: 0.14 W/kg

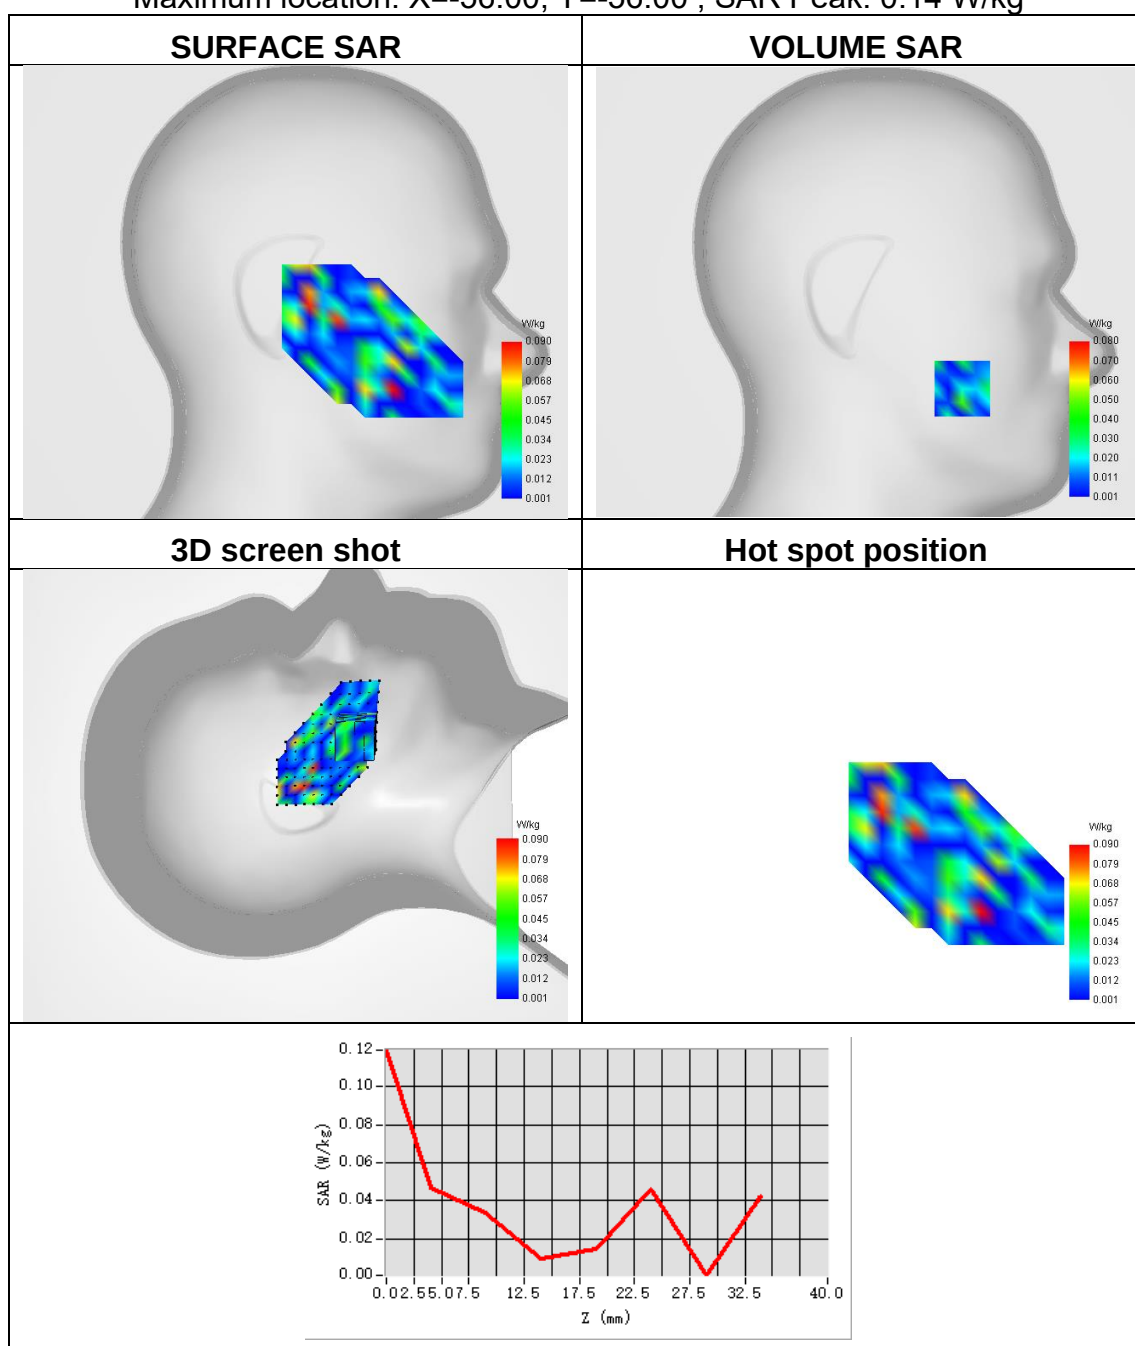




Plot 42:

Test Date	2023-07-14
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Bluetooth
Signal	GFSK
Frequency	2441
SAR 10g (W/Kg)	0.031
SAR 1g (W/Kg)	0.085

Maximum location: X=-16.00, Y=-17.00 ; SAR Peak: 0.27 W/kg

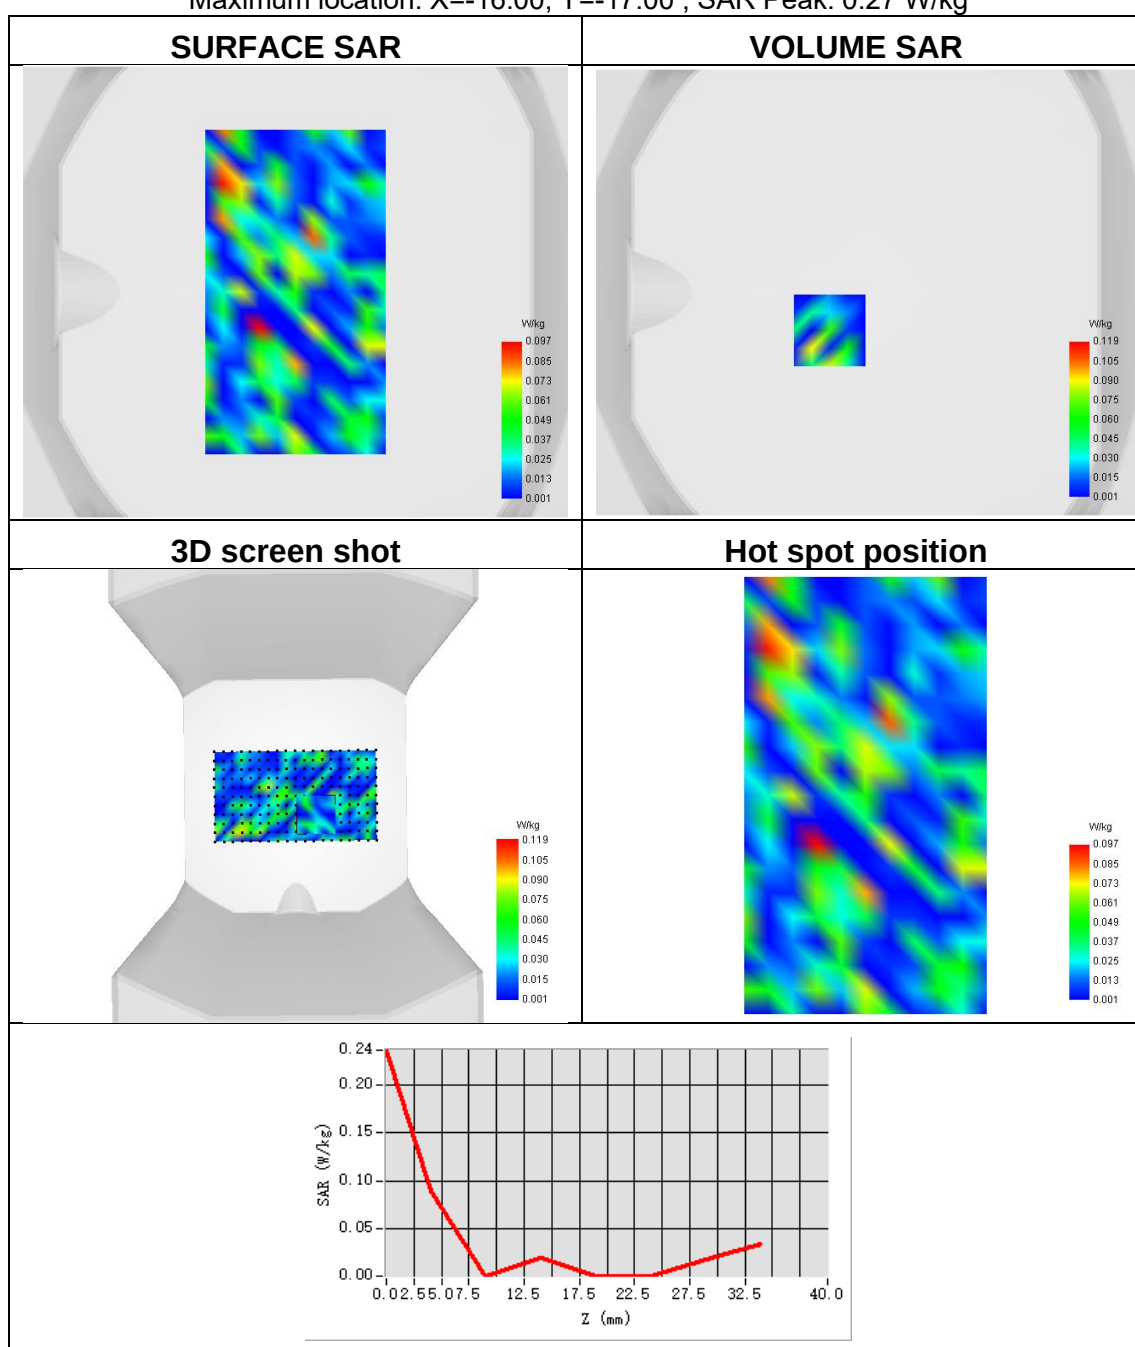




Plot 43:

Test Date	2023-07-12
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 2
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.160
SAR 1g (W/Kg)	0.271

Maximum location: X=-56.00, Y=-33.00 ; SAR Peak: 0.44 W/kg

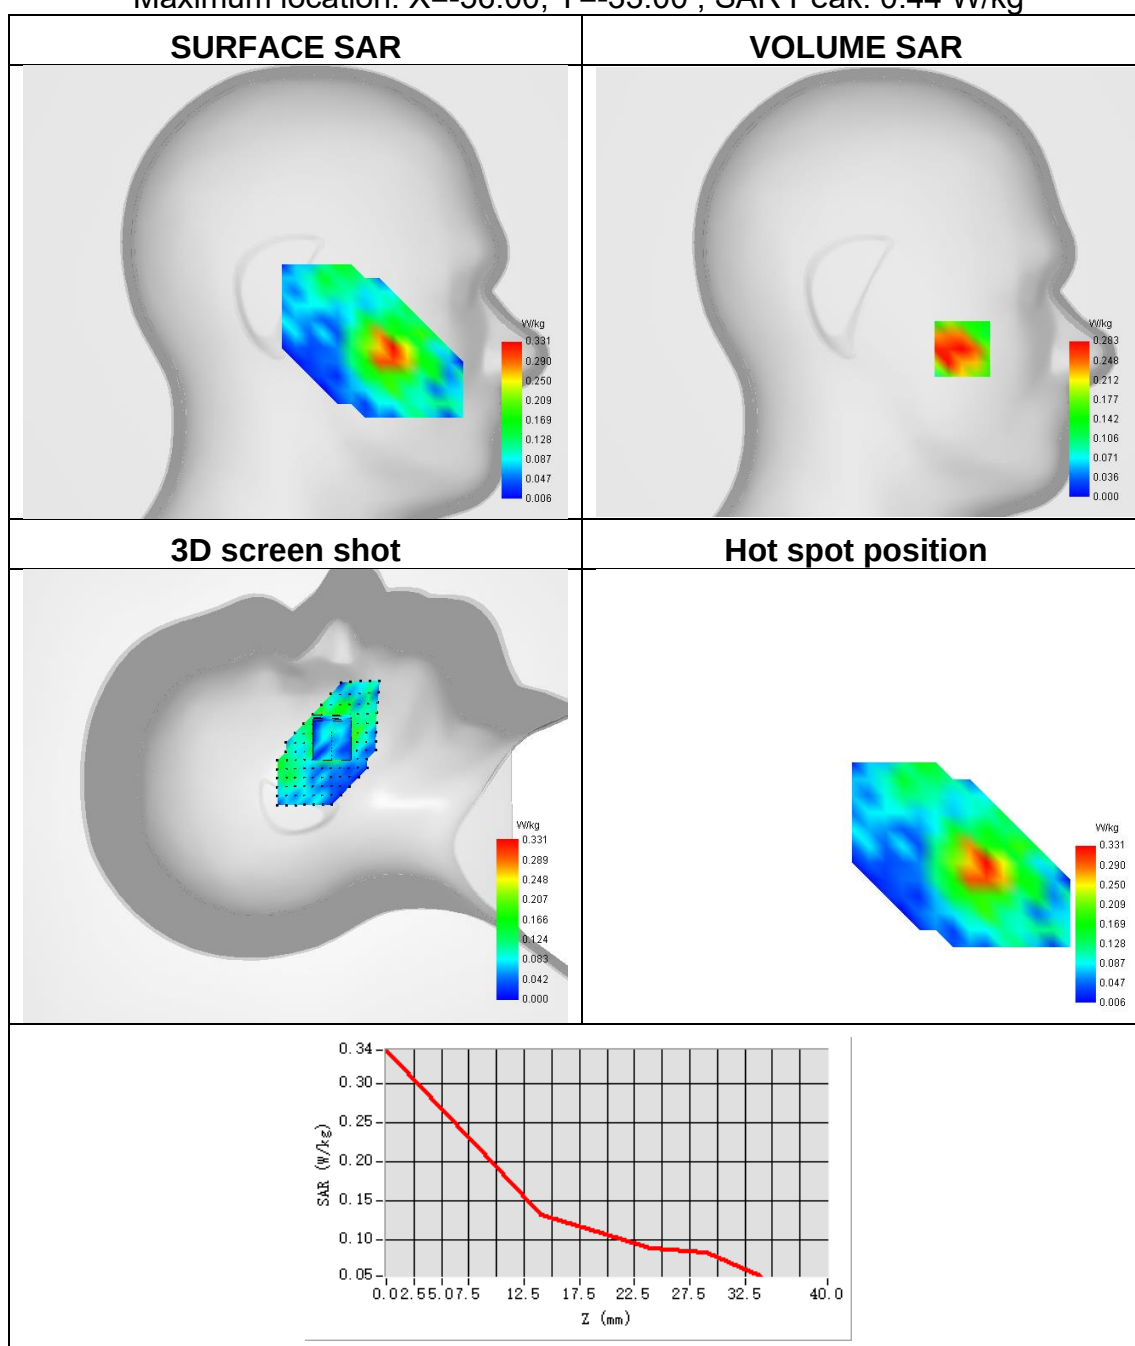




Plot 44:

Test Date	2023-07-12
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.304
SAR 1g (W/Kg)	0.582

Maximum location: X=-1.00, Y=33.00 ; SAR Peak: 1.07 W/kg

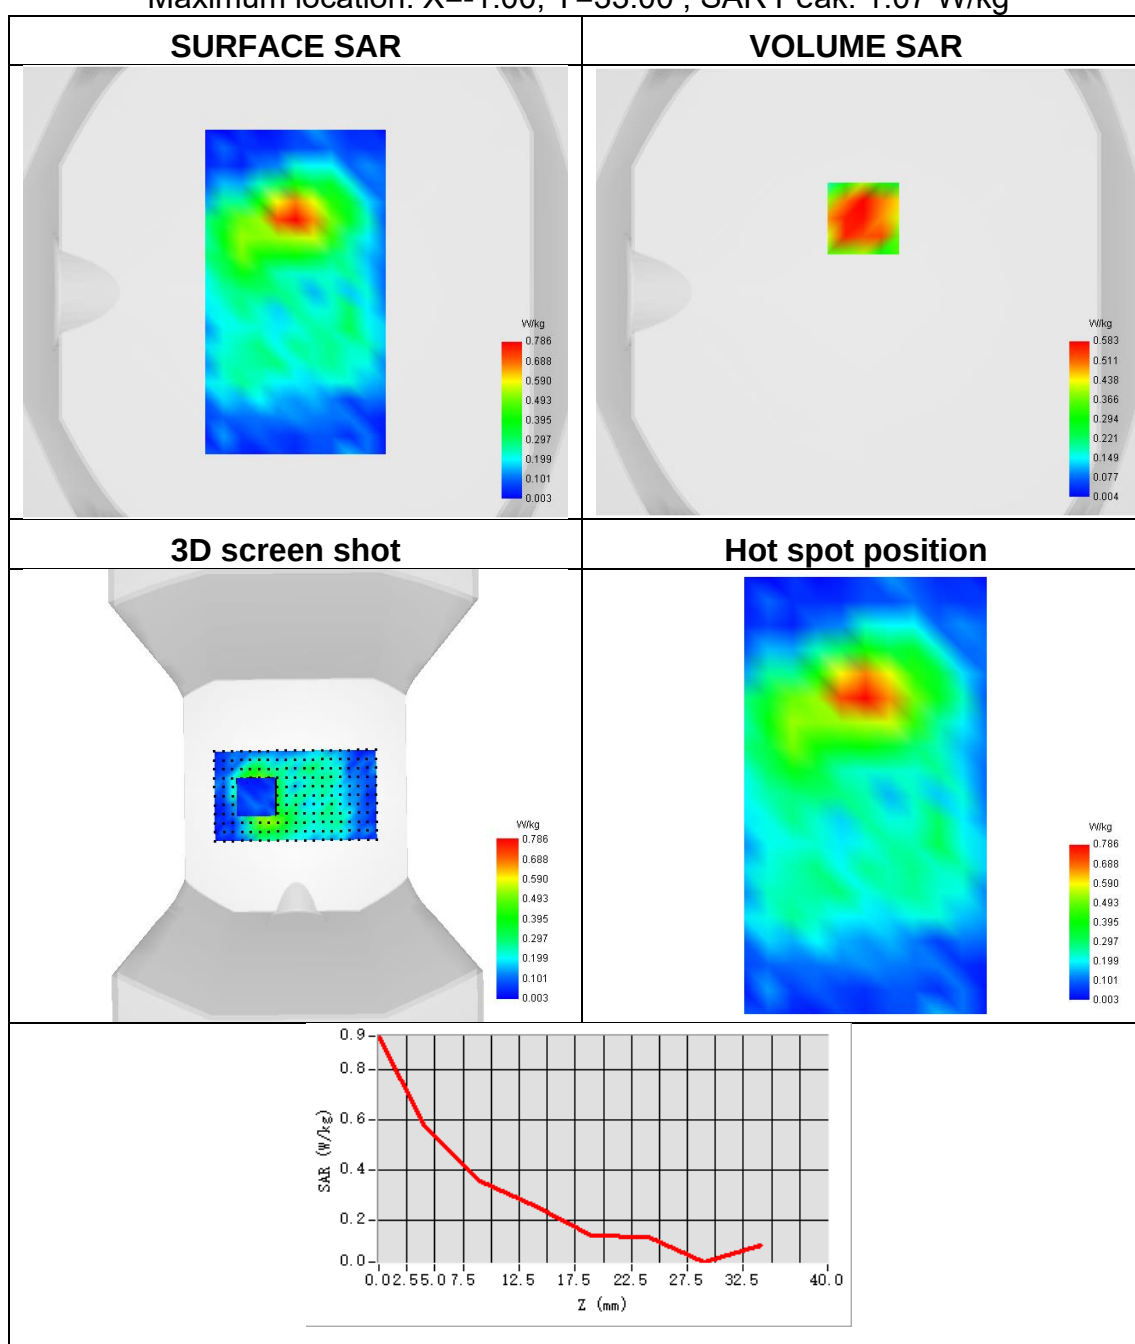




Plot 45:

Test Date	2023-07-11
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 4
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.111
SAR 1g (W/Kg)	0.237

Maximum location: X=-54.00, Y=-32.00 ; SAR Peak: 0.45 W/kg

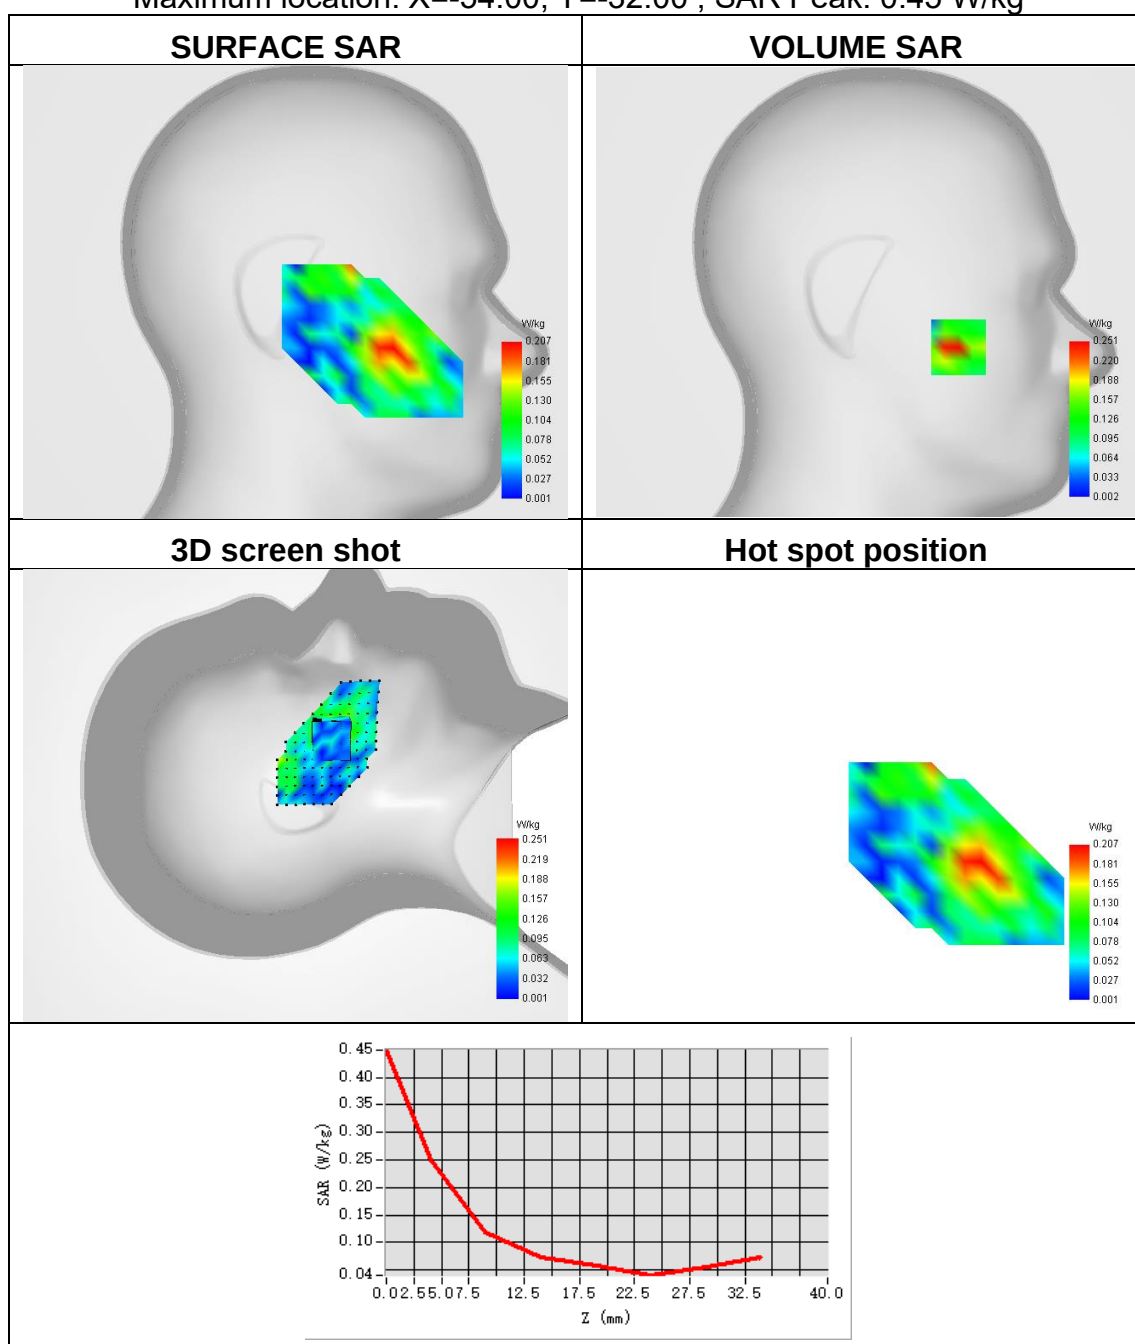




Plot 46:

Test Date	2023-07-11
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.483
SAR 1g (W/Kg)	0.868

Maximum location: X=1.00, Y=0.00 ; SAR Peak: 1.51 W/kg

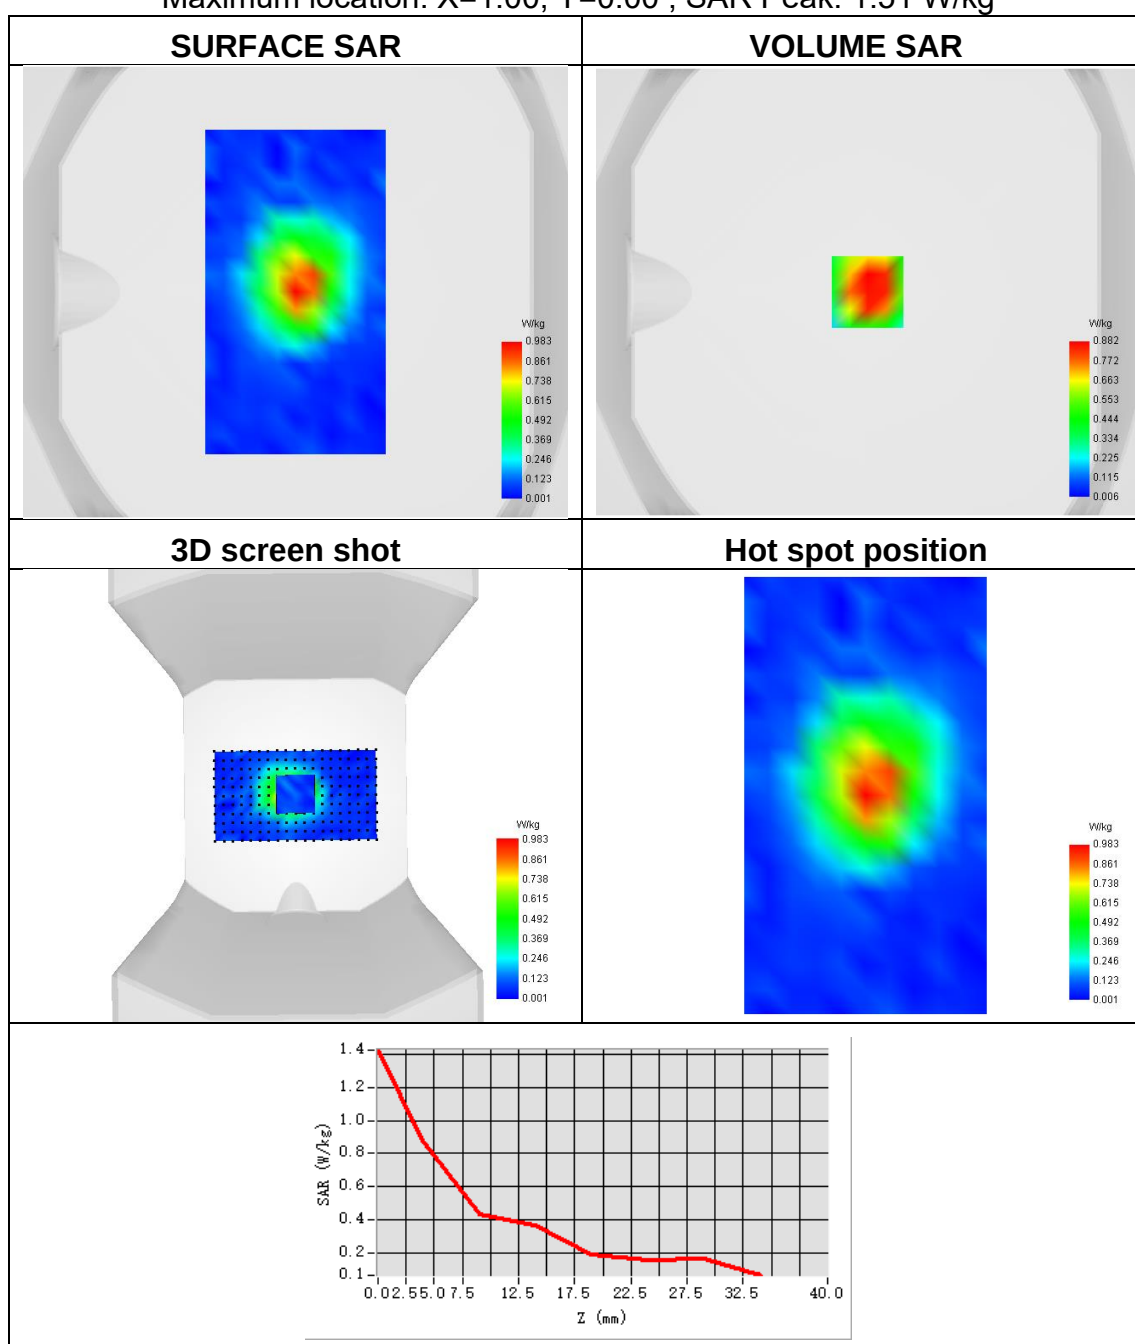




Plot 47:

Test Date	2023-07-17
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.127
SAR 1g (W/Kg)	0.236

Maximum location: X=-41.00, Y=-24.00 ; SAR Peak: 0.46 W/kg

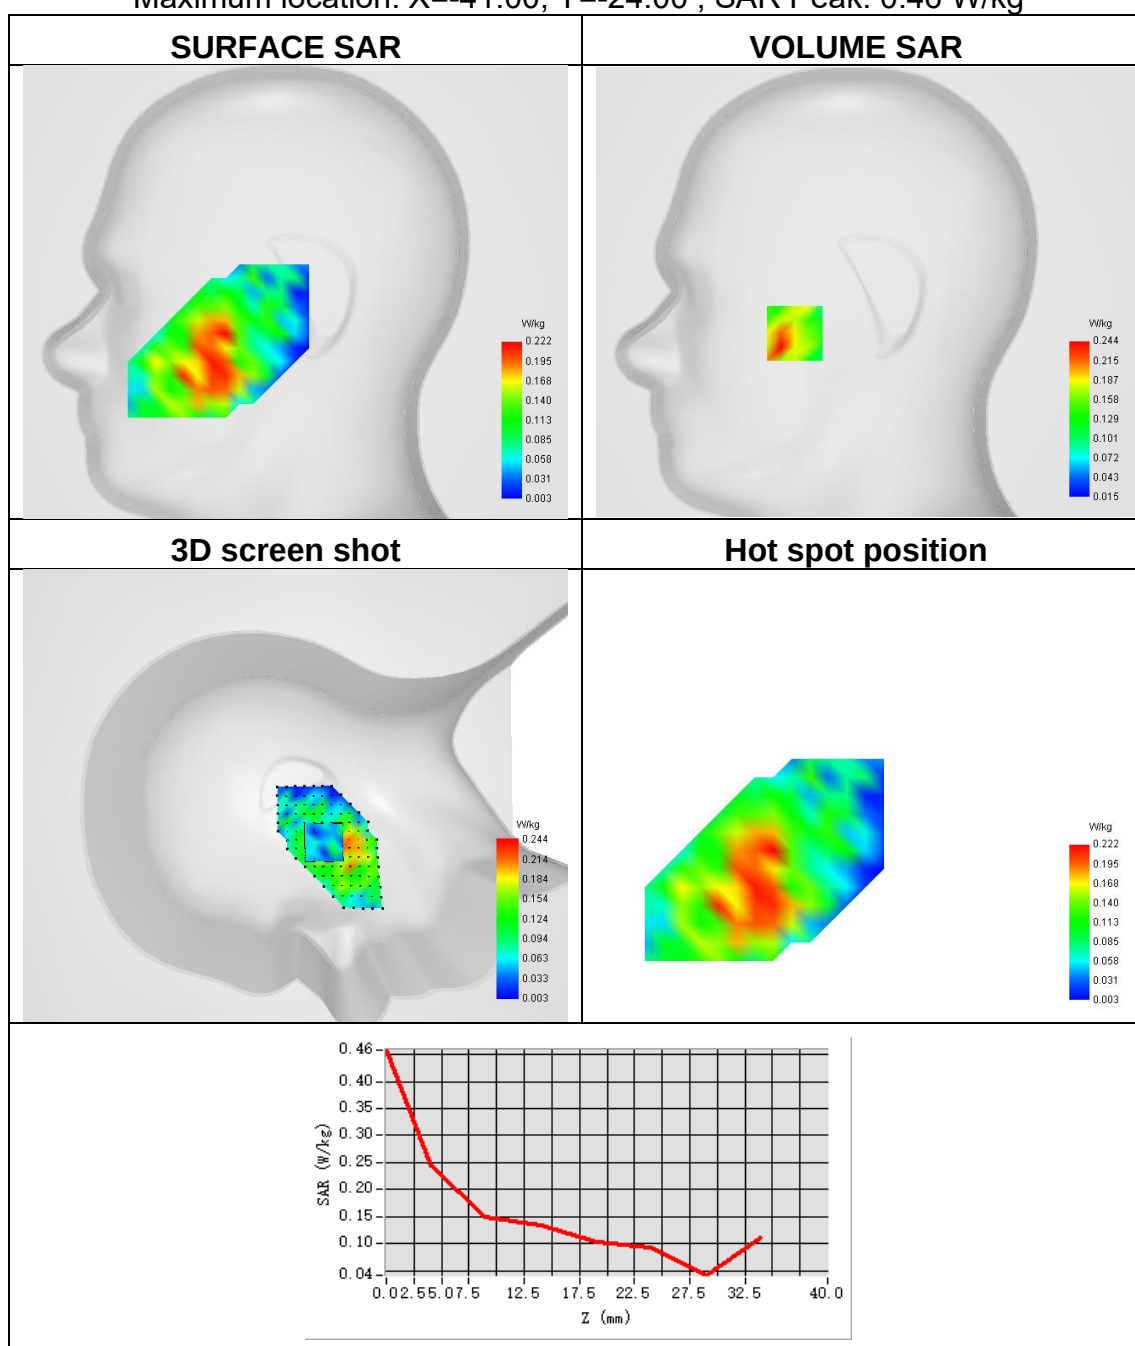




Plot 48:

Test Date	2023-07-17
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.109
SAR 1g (W/Kg)	0.201

Maximum location: X=16.00, Y=-51.00 ; SAR Peak: 0.34 W/kg

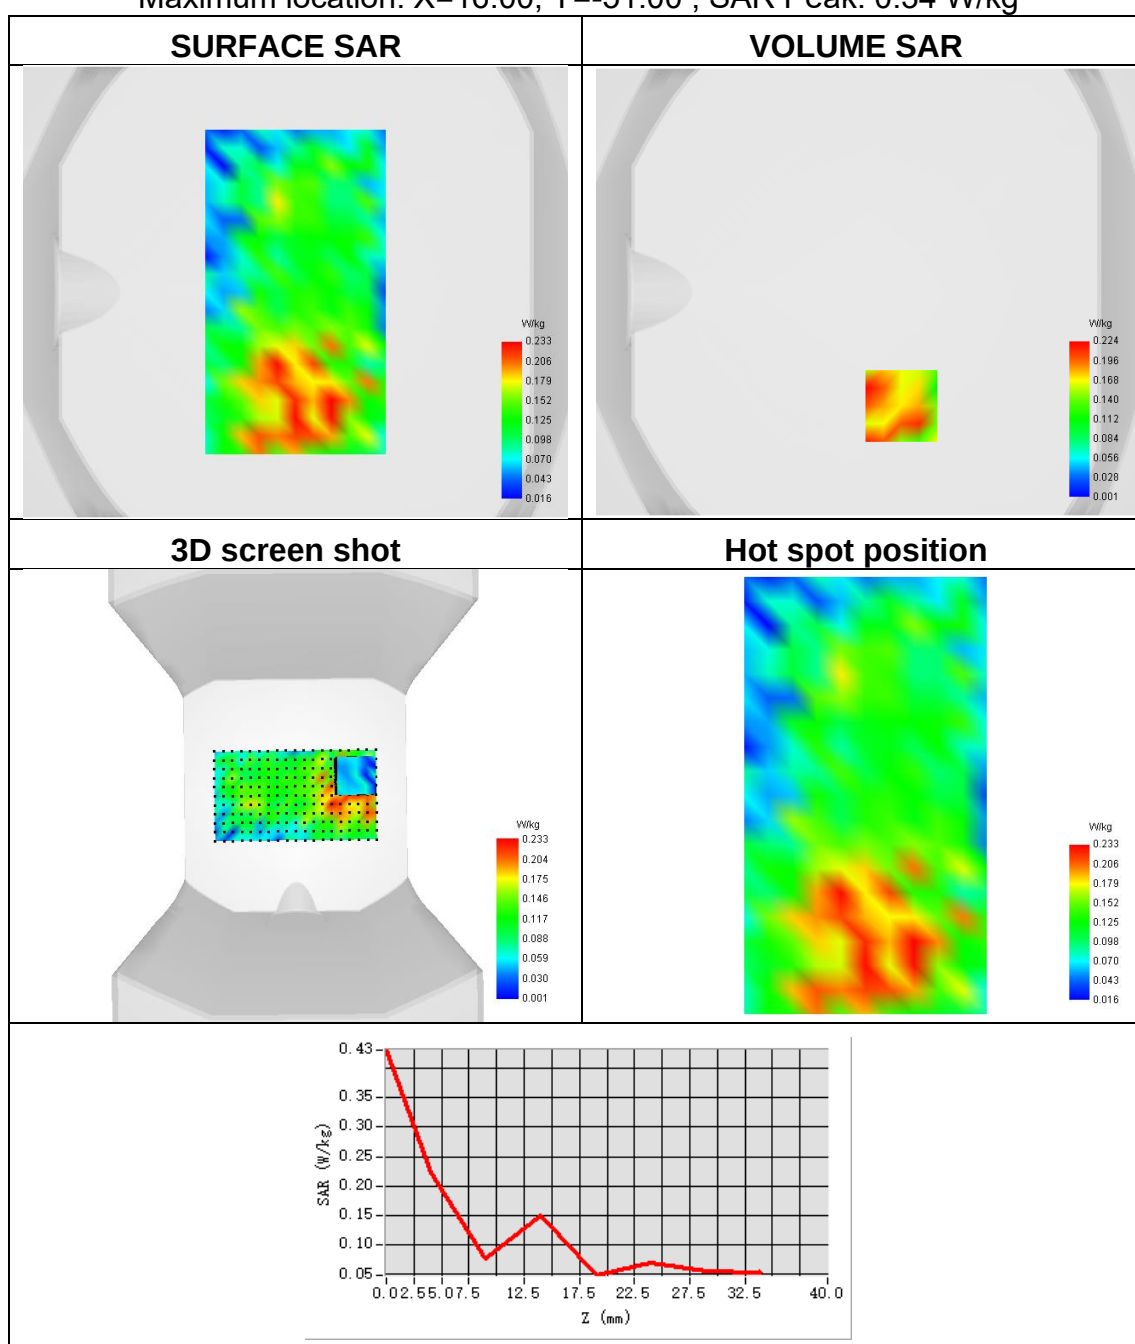




Plot 49:

Test Date	2023-07-09
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 12
Signal	LTE FDD
Frequency	704
SAR 10g (W/Kg)	0.028
SAR 1g (W/Kg)	0.054

Maximum location: X=-48.00, Y=-24.00 ; SAR Peak: 0.51 W/kg

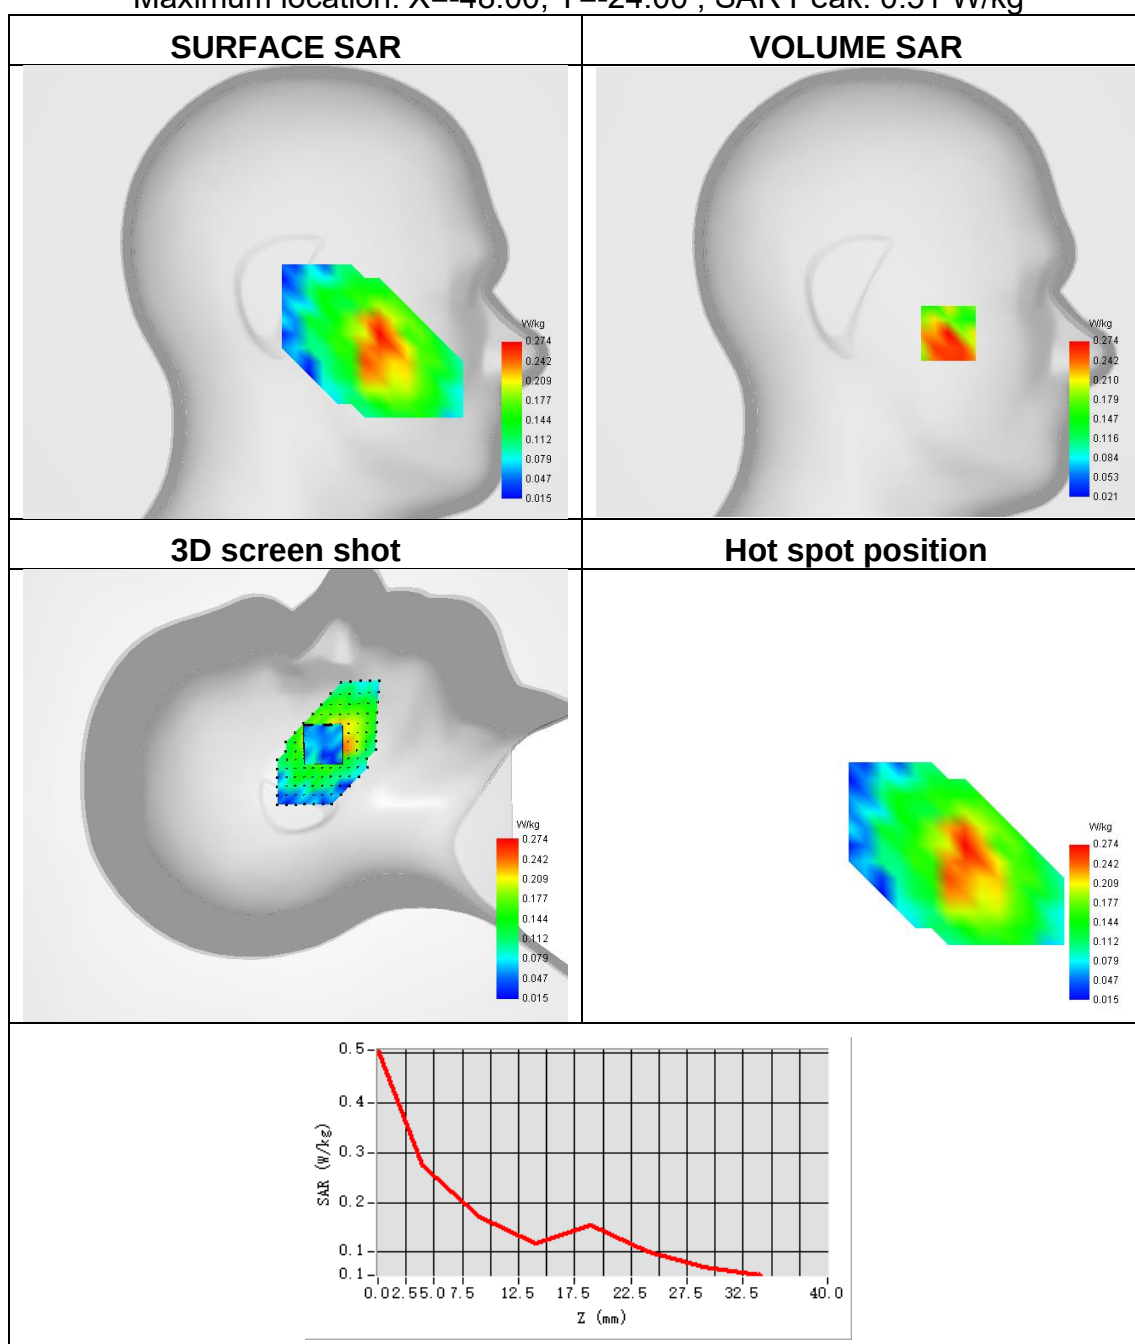




Plot 50:

Test Date	2023-07-09
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 12
Signal	LTE FDD
Frequency	704
SAR 10g (W/Kg)	0.169
SAR 1g (W/Kg)	0.299

Maximum location: X=8.00, Y=-40.00 ; SAR Peak: 0.49 W/kg

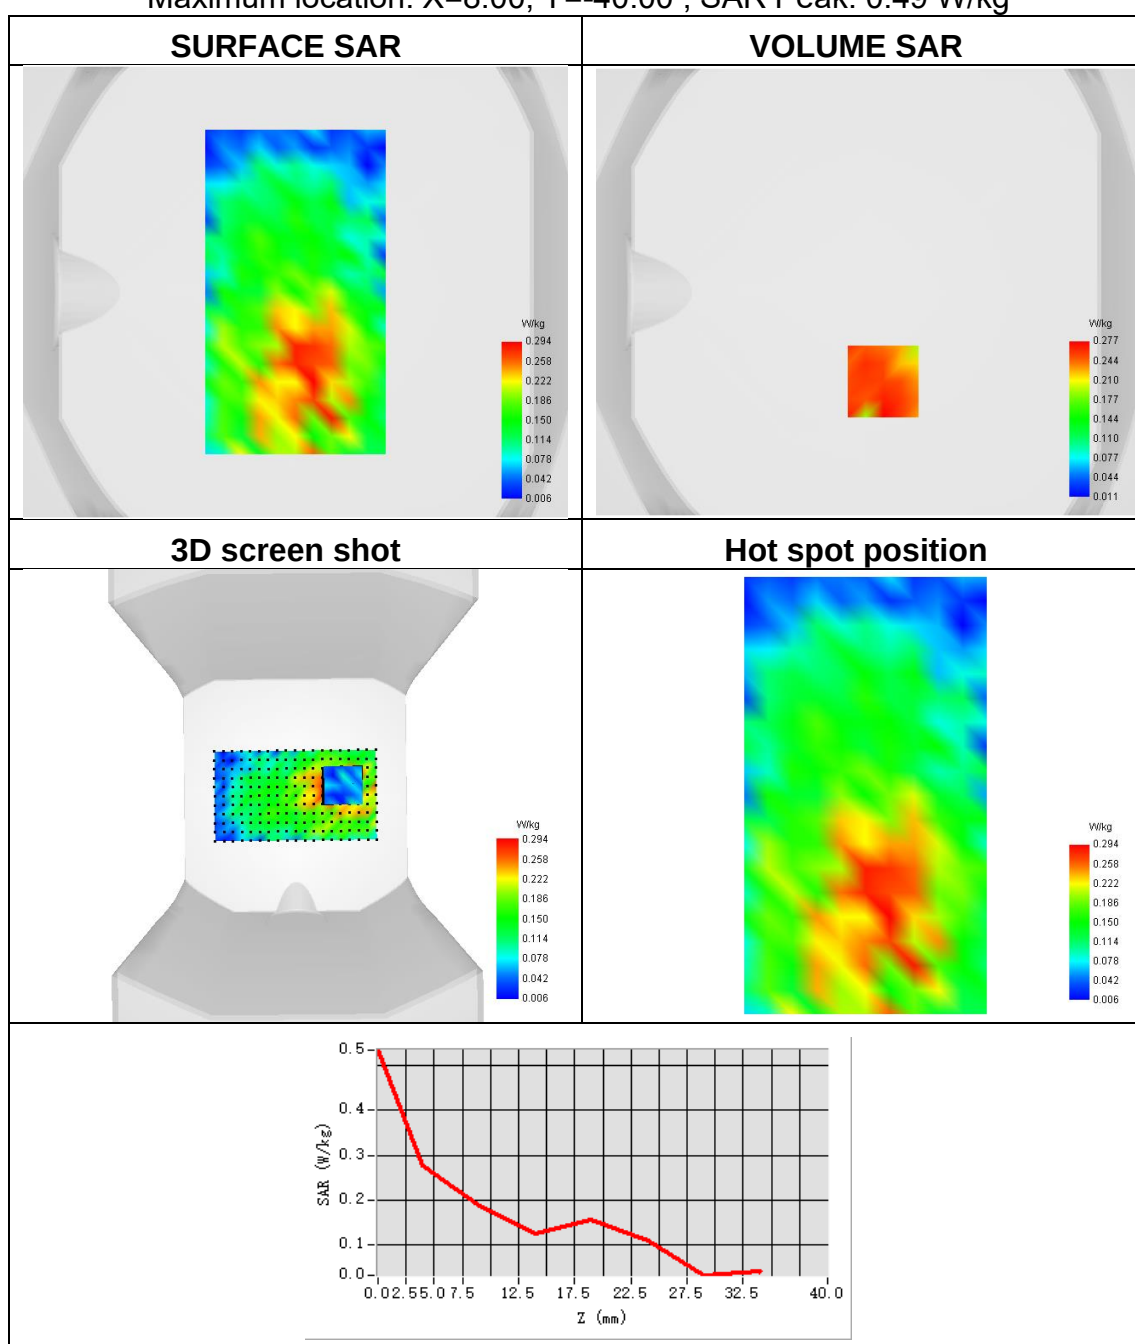




Plot 51:

Test Date	2023-07-09
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 17
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.147
SAR 1g (W/Kg)	0.269

Maximum location: X=-55.00, Y=-39.00 ; SAR Peak: 0.43 W/kg

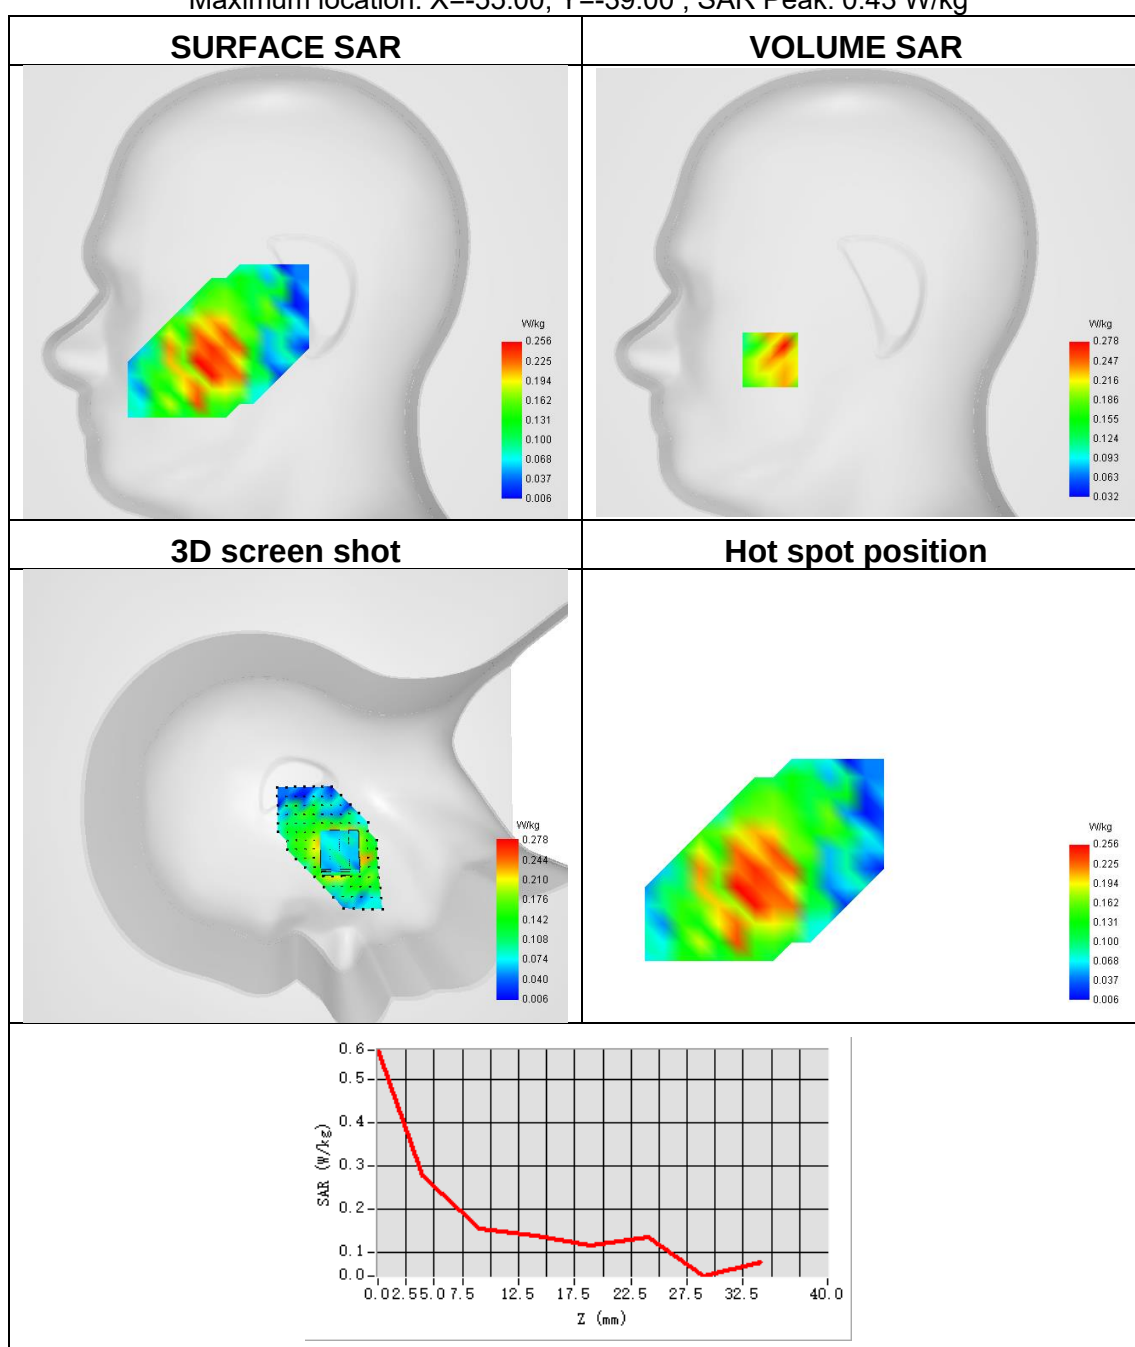




Plot 52:

Test Date	2023-07-09
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 17
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.173
SAR 1g (W/Kg)	0.310

Maximum location: X=7.00, Y=-38.00 ; SAR Peak: 0.45 W/kg

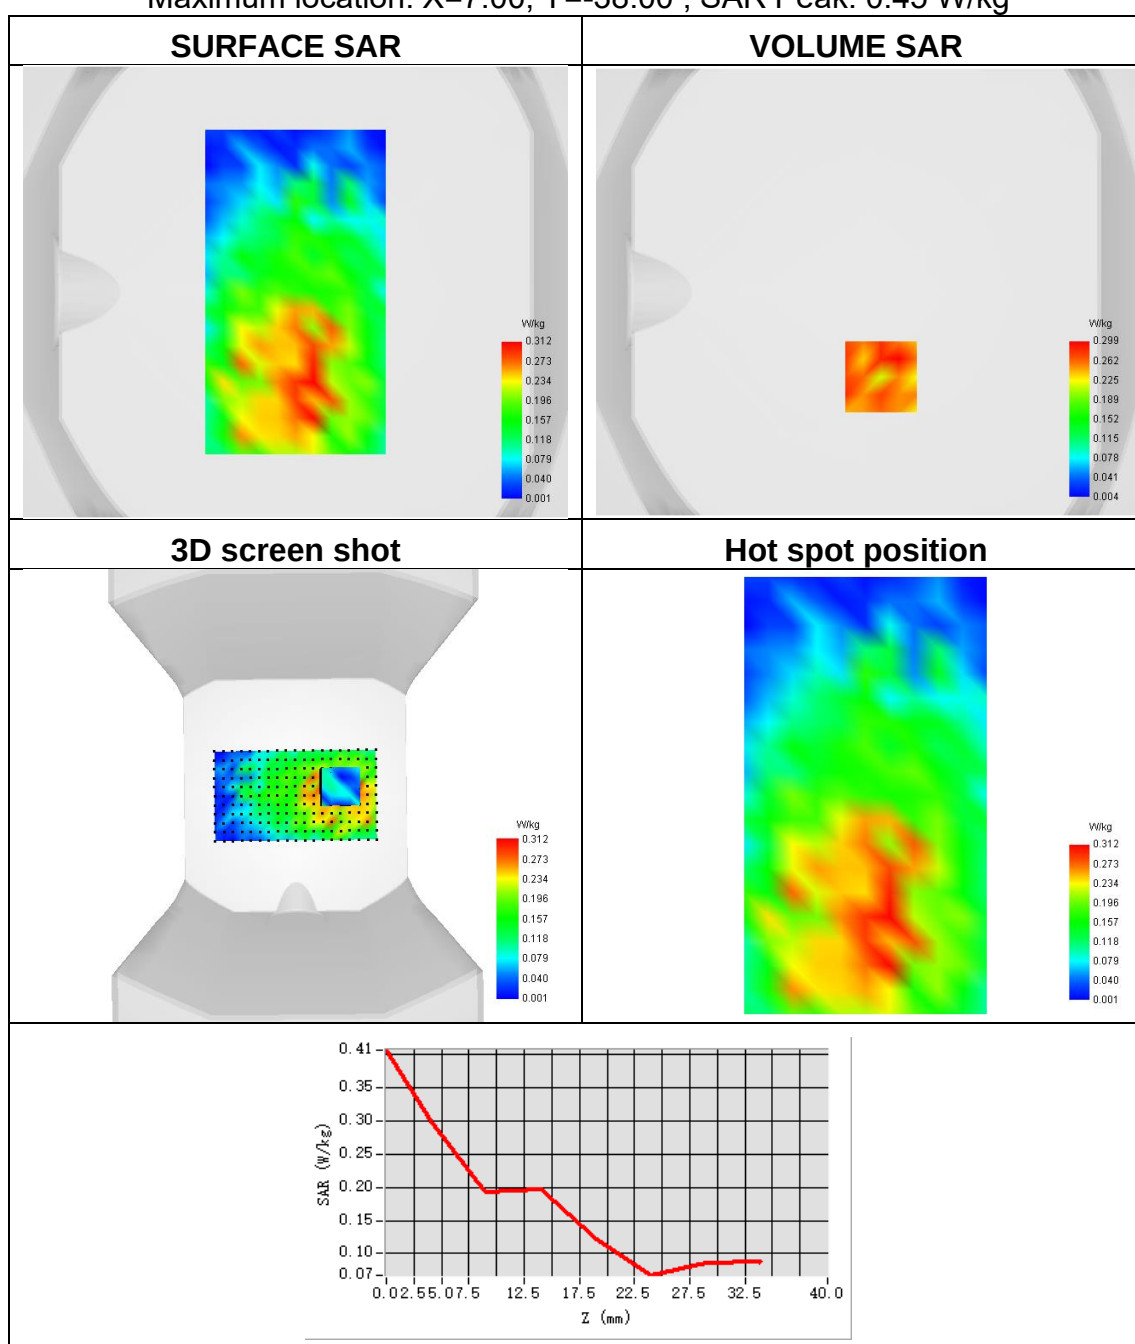




Plot 53:

Test Date	2023-07-13
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	LTE band 30
Signal	LTE FDD
Frequency	2310
SAR 10g (W/Kg)	0.072
SAR 1g (W/Kg)	0.158

Maximum location: X=-46.00, Y=-48.00 ; SAR Peak: 0.51 W/kg

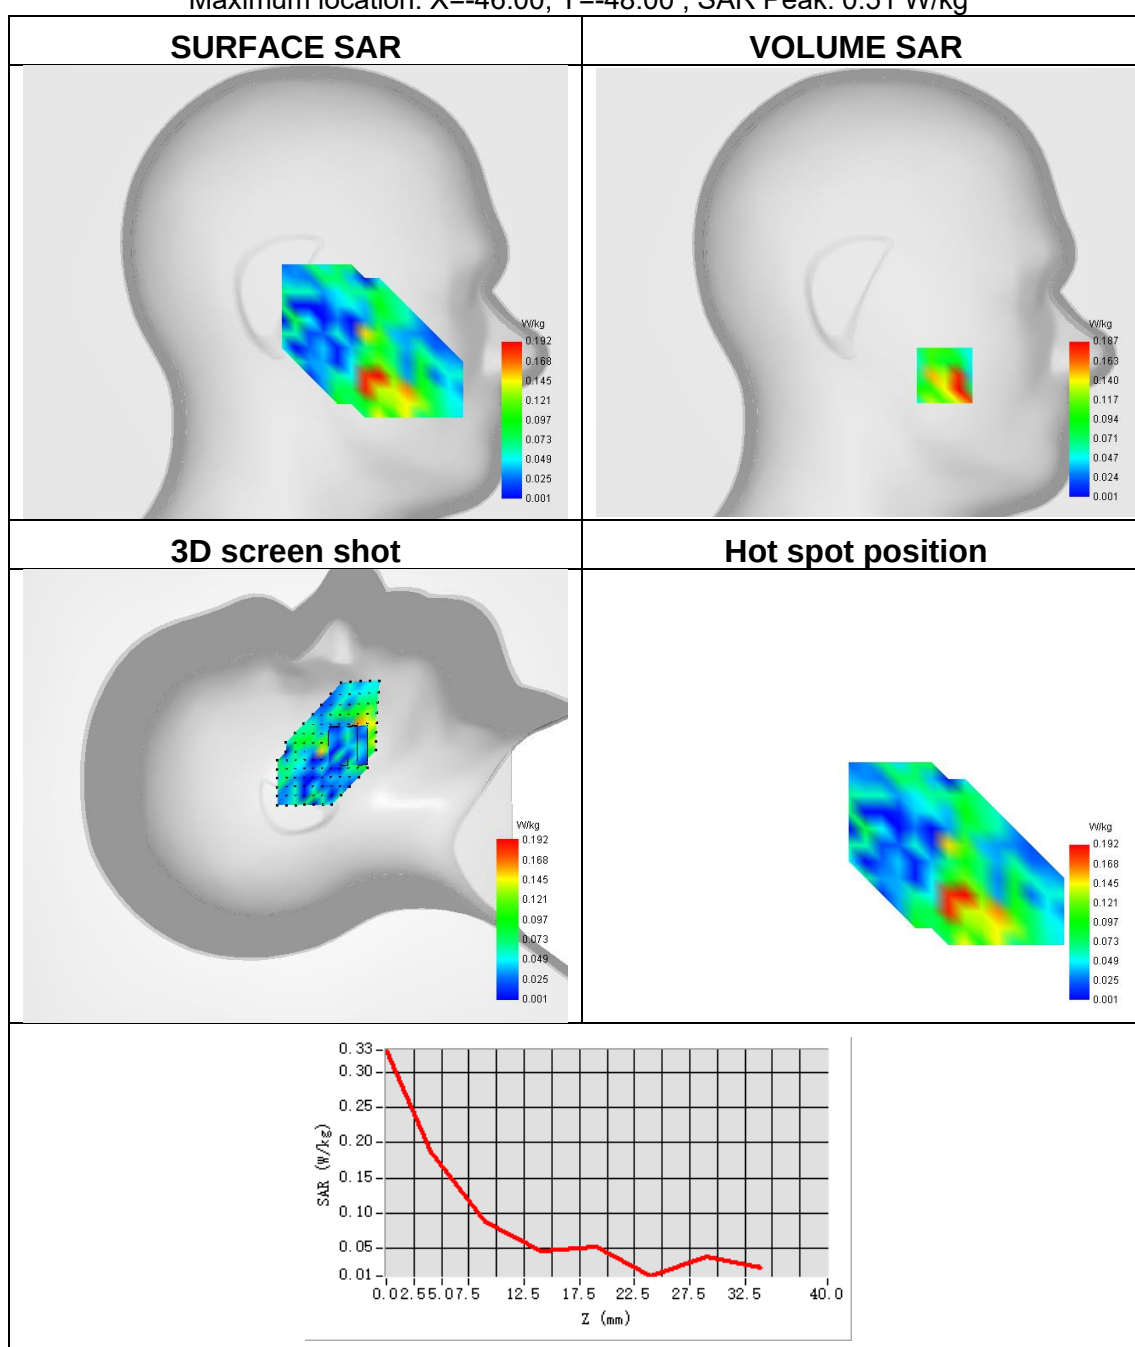




Plot 54:

Test Date	2023-07-13
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 30
Signal	LTE FDD
Frequency	2310
SAR 10g (W/Kg)	0.124
SAR 1g (W/Kg)	0.271

Maximum location: X=27.00, Y=15.00 ; SAR Peak: 0.61 W/kg

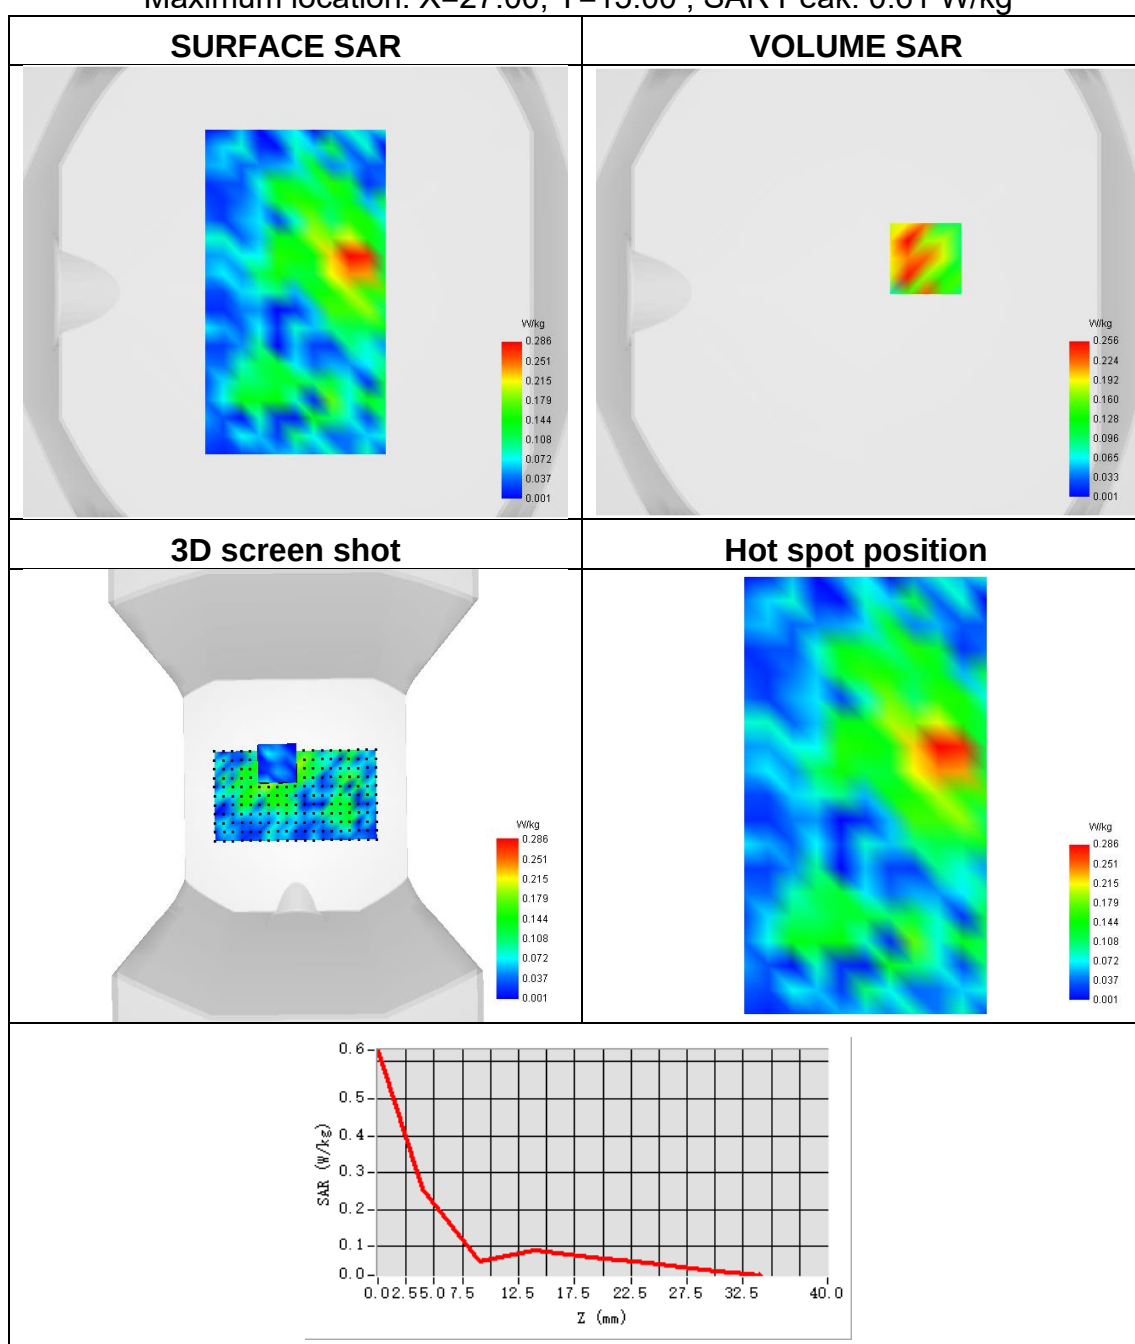




Plot 55:

Test Date	2023-07-11
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 66
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.151
SAR 1g (W/Kg)	0.289

Maximum location: X=-50.00, Y=-33.00 ; SAR Peak: 0.52 W/kg

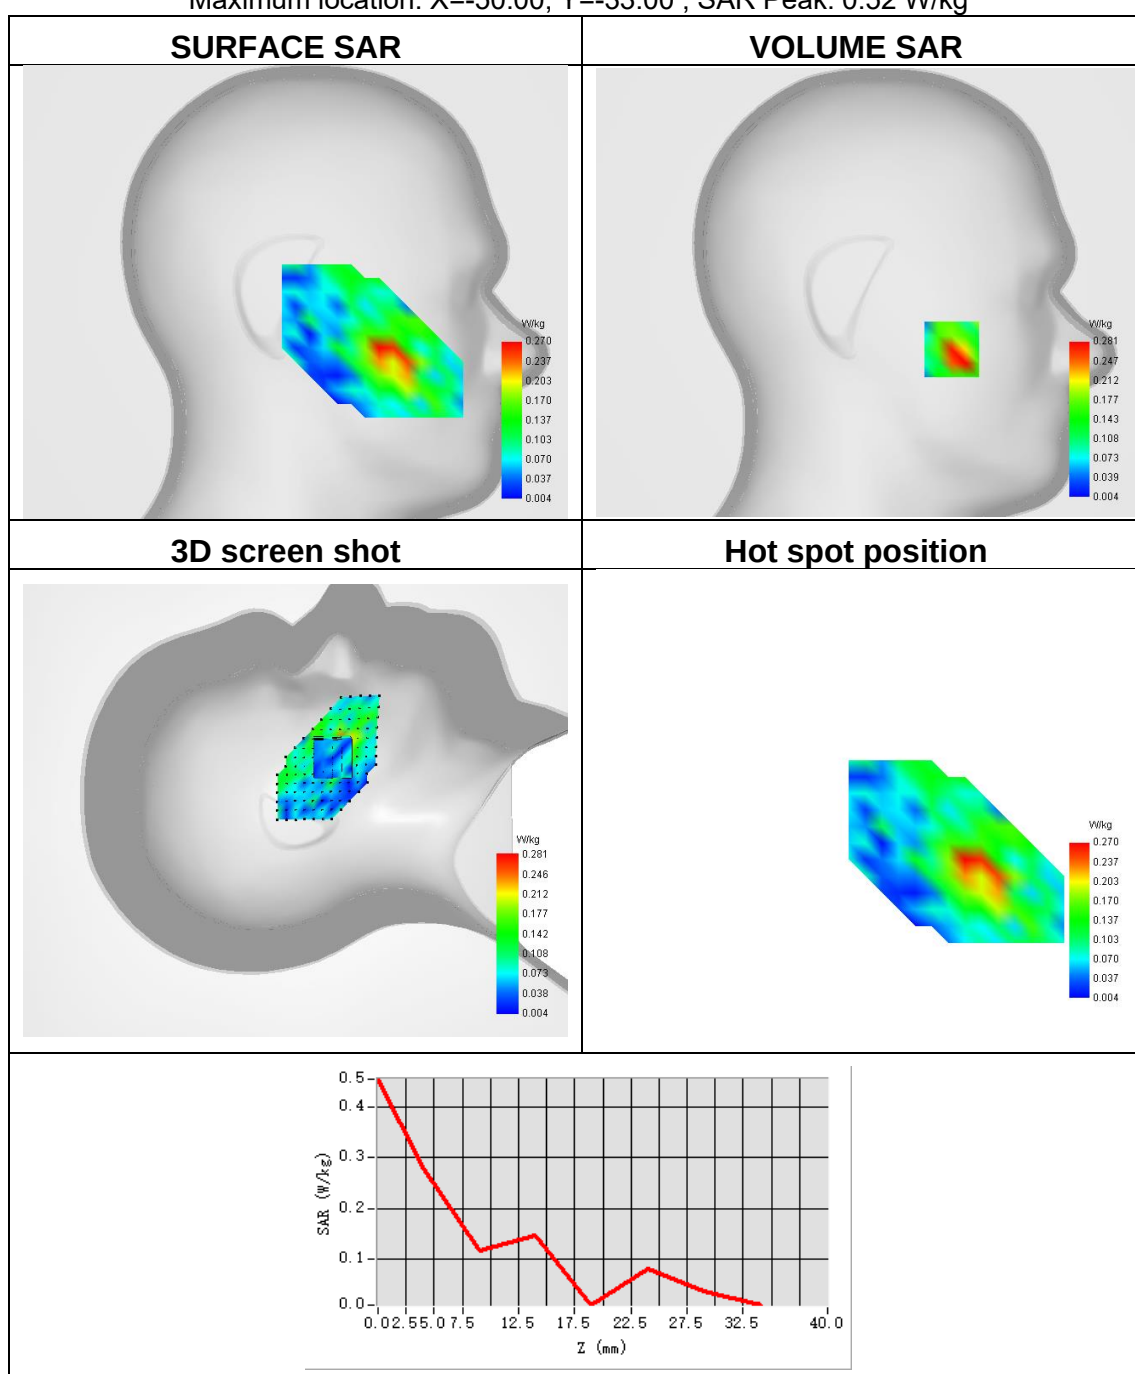




Plot 56:

Test Date	2023-07-11
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.312
SAR 1g (W/Kg)	0.571

Maximum location: X=0.00, Y=30.00 ; SAR Peak: 0.97 W/kg

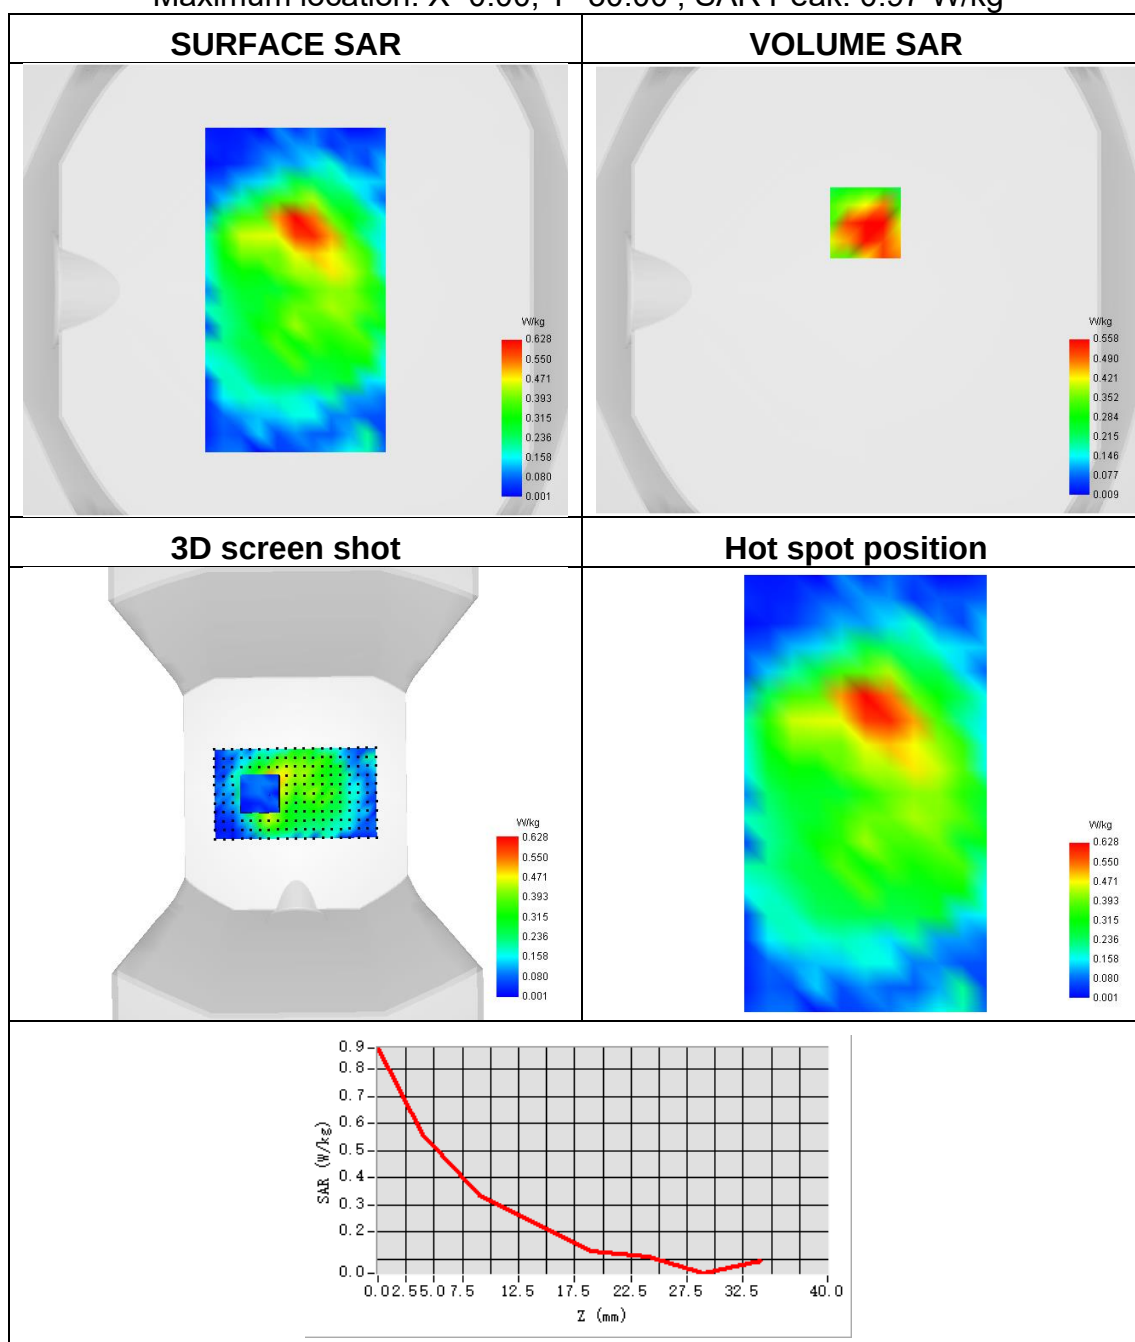




Plot 57:

Test Date	2023-06-21
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 71
Signal	LTE FDD
Frequency	680.5
SAR 10g (W/Kg)	0.110
SAR 1g (W/Kg)	0.192

Maximum location: X=-55.00, Y=-25.00 ; SAR Peak: 0.34 W/kg

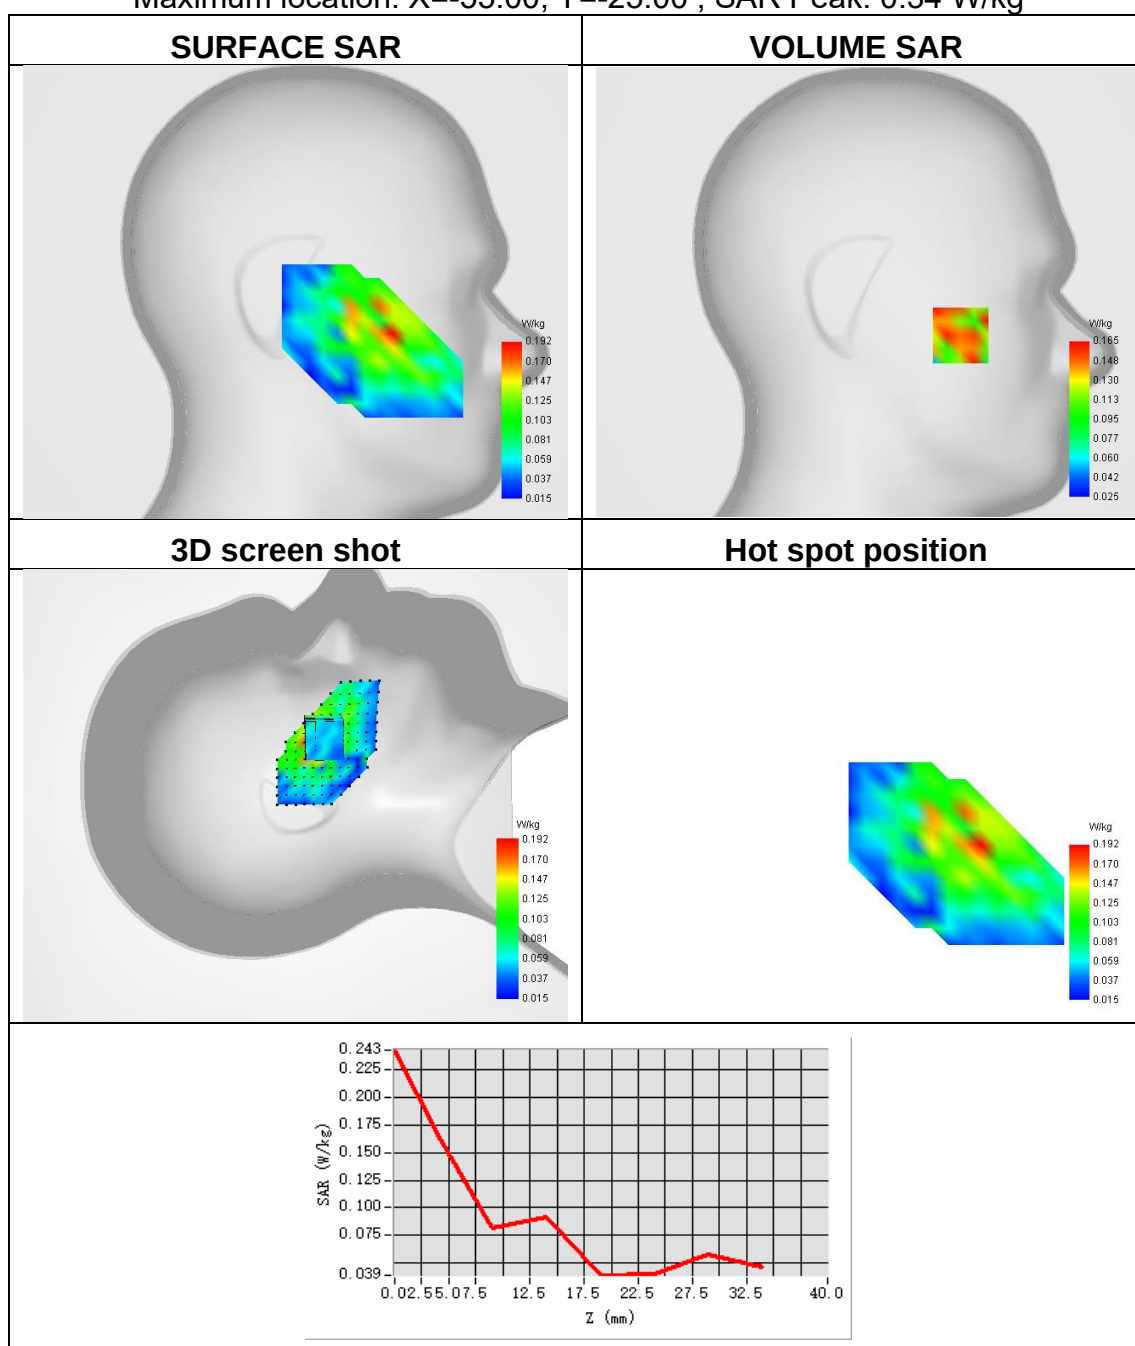




Plot 58:

Test Date	2023-06-21
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 71
Signal	LTE FDD
Frequency	680.5
SAR 10g (W/Kg)	0.164
SAR 1g (W/Kg)	0.288

Maximum location: X=8.00, Y=-47.00 ; SAR Peak: 0.46 W/kg

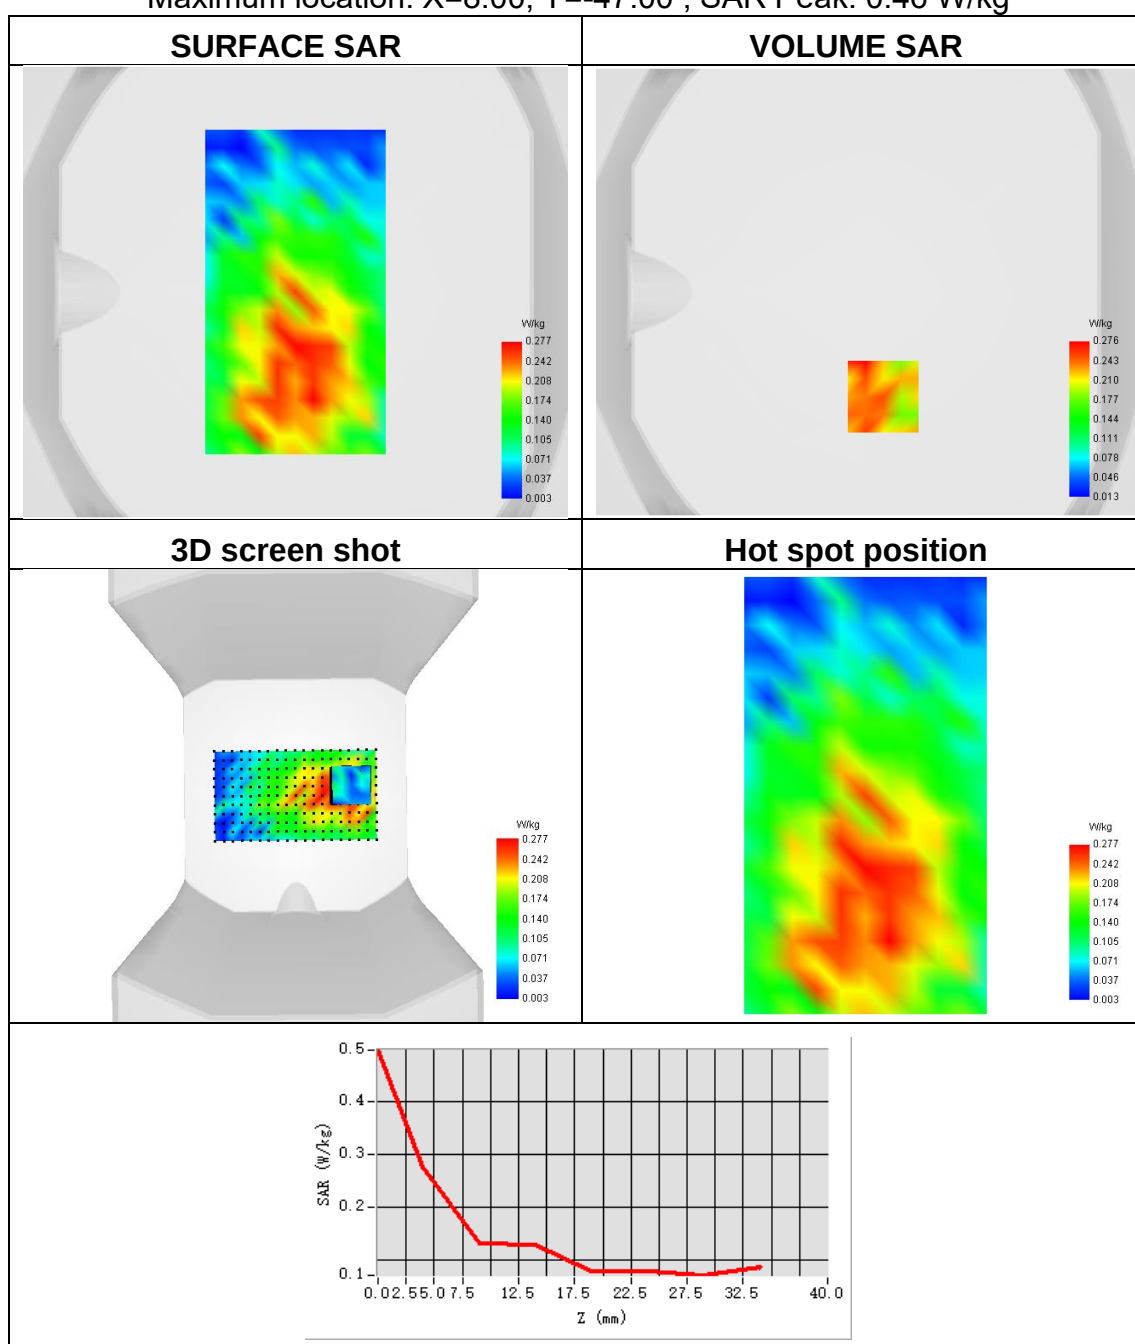




Plot 59:

Test Date	2023-07-17
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR N5
Signal	NR FDD
Frequency	844
SAR 10g (W/Kg)	0.061
SAR 1g (W/Kg)	0.138

Maximum location: X=-42.00, Y=-39.00 ; SAR Peak: 0.27 W/kg

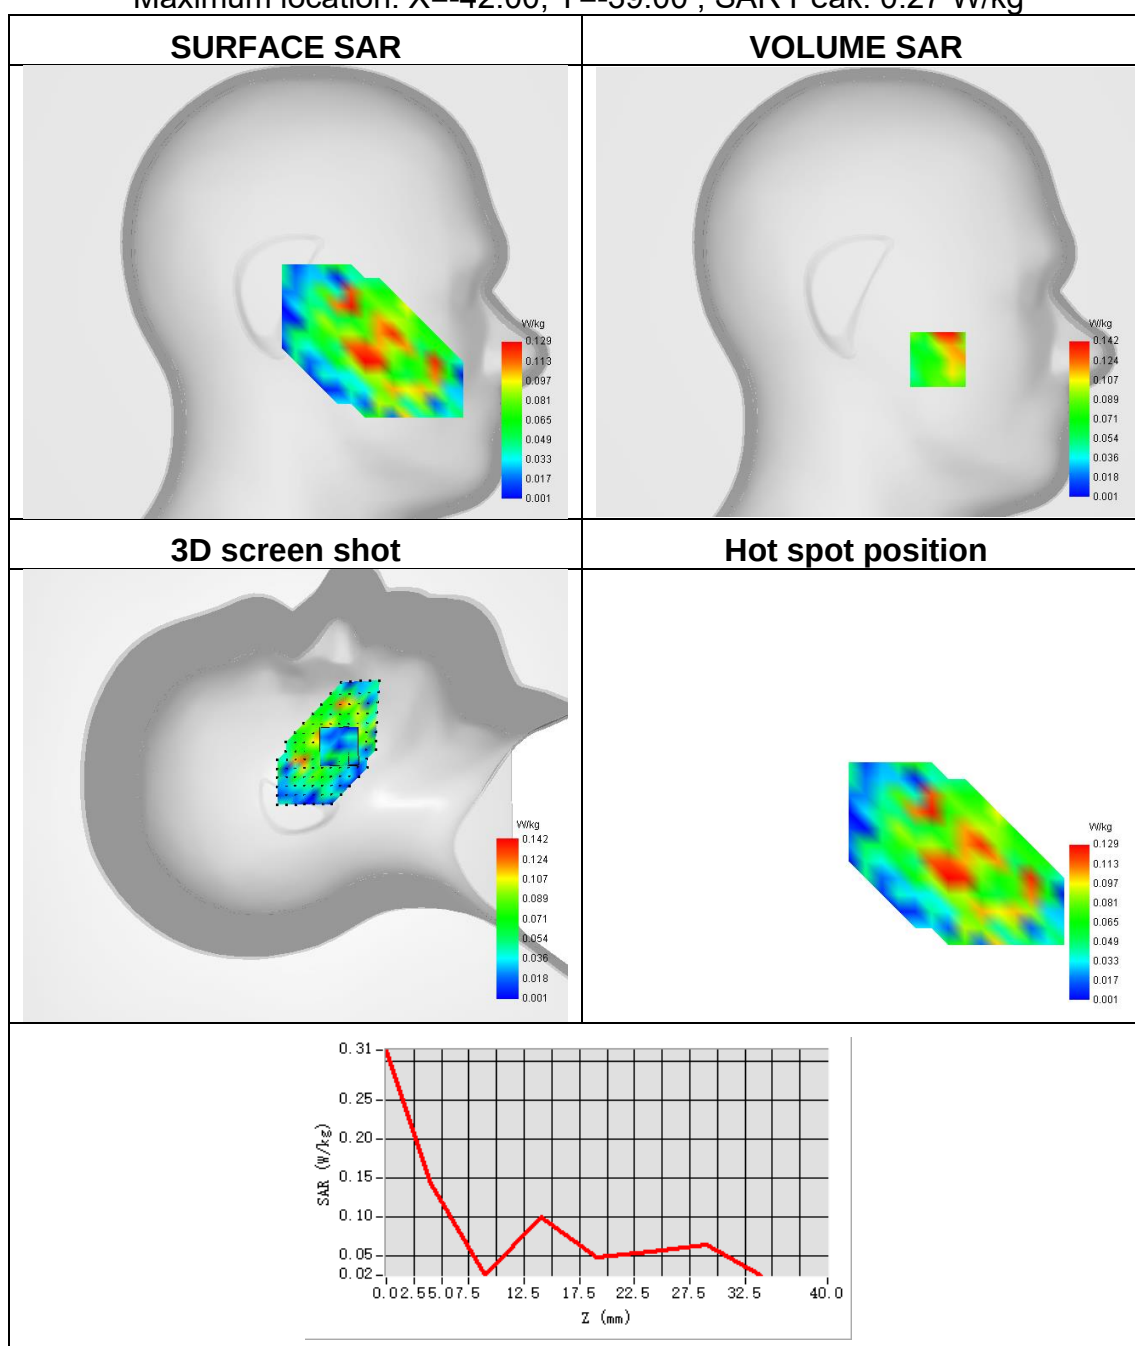




Plot 60:

Test Date	2023-07-17
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR N5
Signal	NR FDD
Frequency	844
SAR 10g (W/Kg)	0.076
SAR 1g (W/Kg)	0.172

Maximum location: X=5.00, Y=25.00 ; SAR Peak: 0.40 W/kg

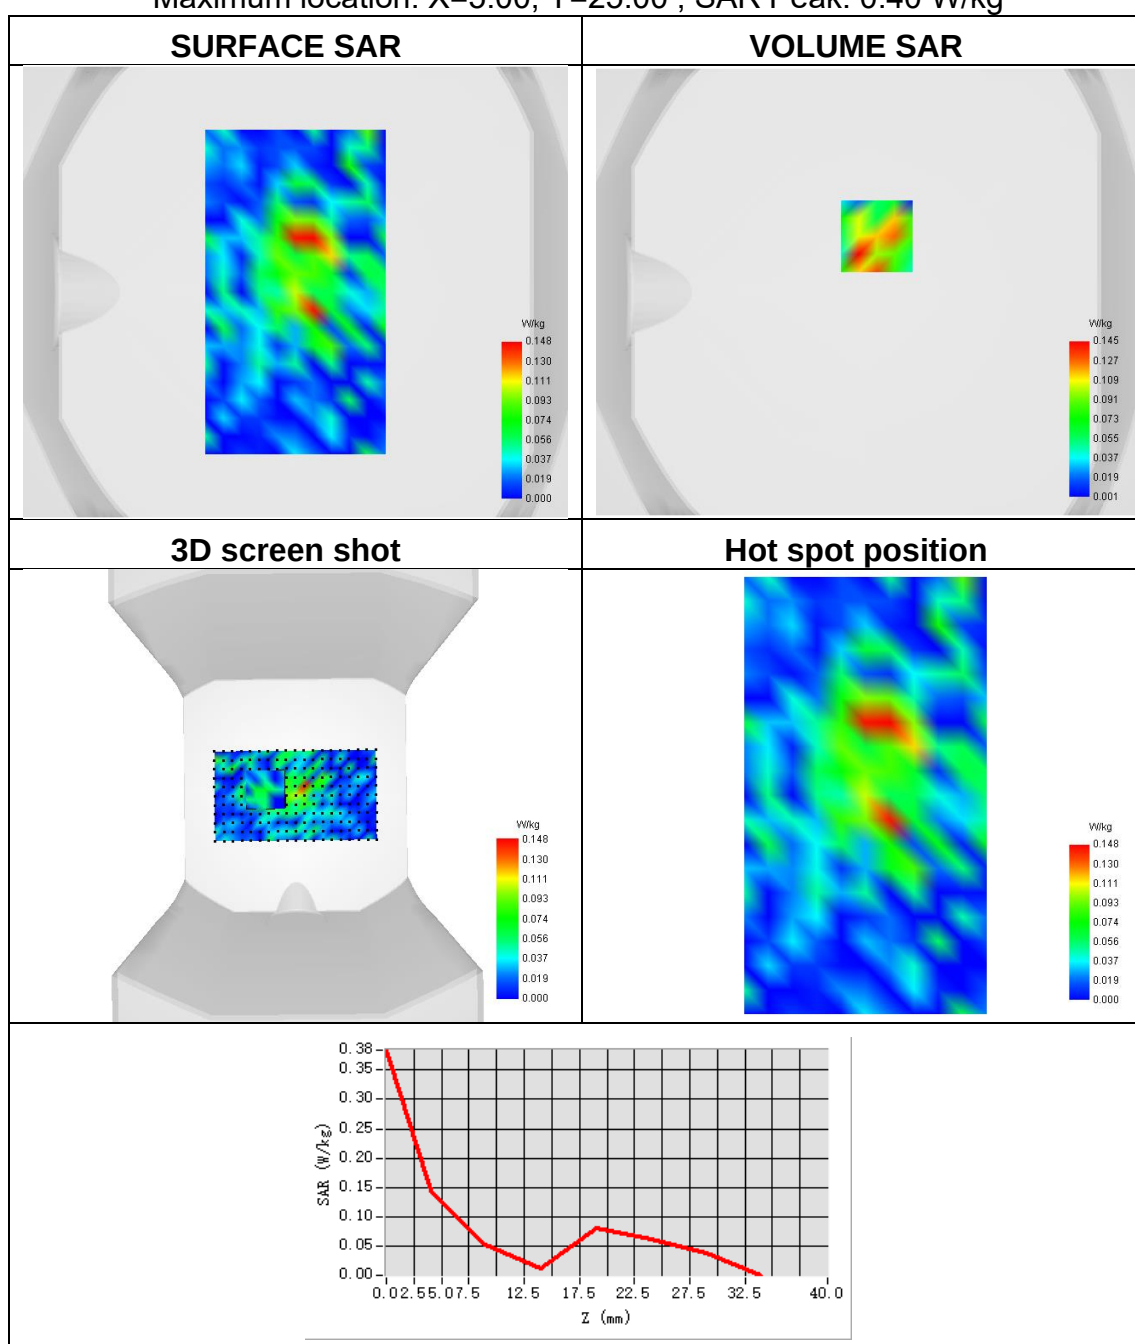




Plot 61:

Test Date	2023-07-13
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR N41
Signal	NR TDD
Frequency	2592.99
SAR 10g (W/Kg)	0.083
SAR 1g (W/Kg)	0.196

Maximum location: X=-47.00, Y=-48.00 ; SAR Peak: 0.43 W/kg

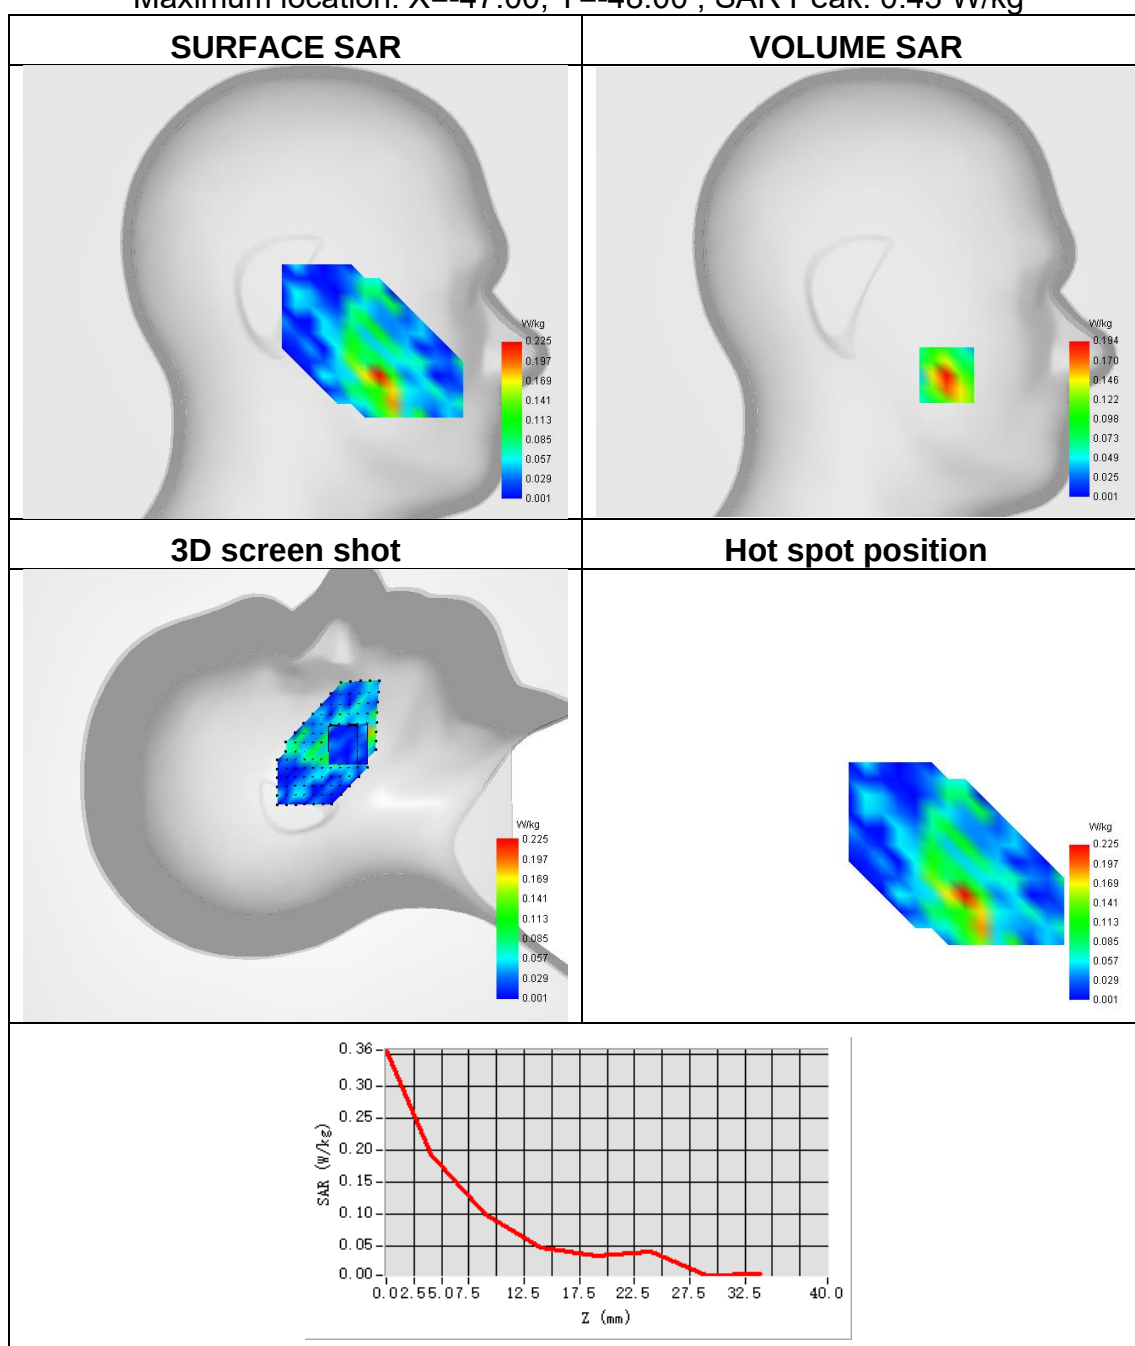




Plot 62:

Test Date	2023-07-13
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR N41
Signal	NR TDD
Frequency	2592.99
SAR 10g (W/Kg)	0.179
SAR 1g (W/Kg)	0.430

Maximum location: X=-25.00, Y=-60.00 ; SAR Peak: 1.63 W/kg

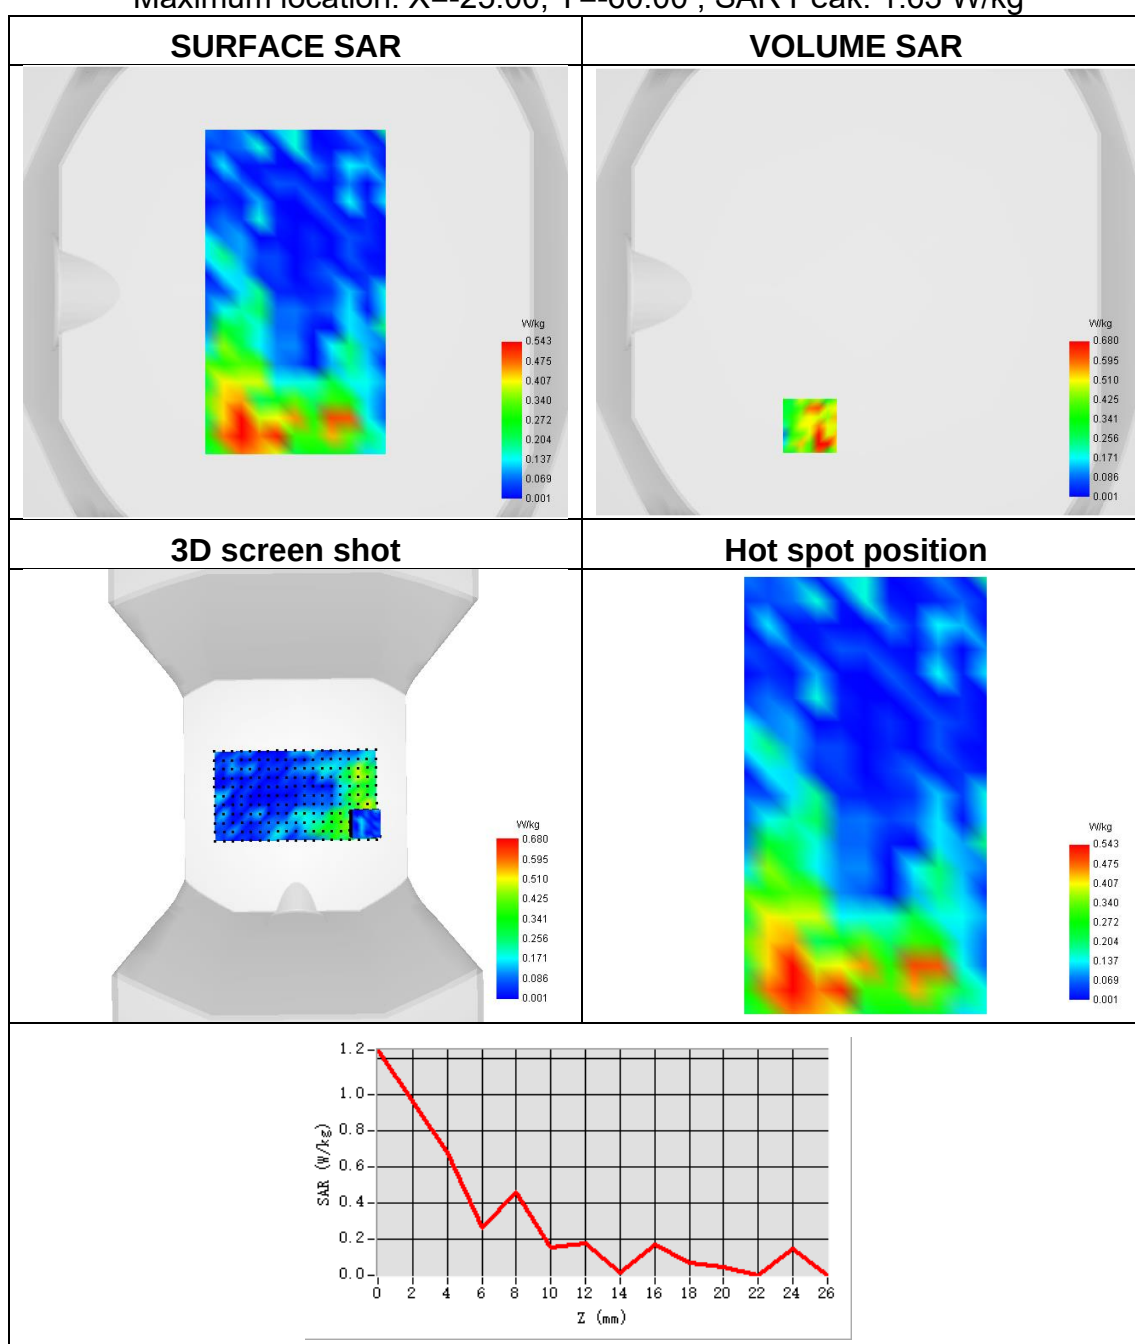




Plot 63:

Test Date	2023-07-15
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	NR N48
Signal	NR TDD
Frequency	3649.98
SAR 10g (W/Kg)	0.332
SAR 1g (W/Kg)	0.844

Maximum location: X=-24.00, Y=0.00 ; SAR Peak: 2.09 W/kg

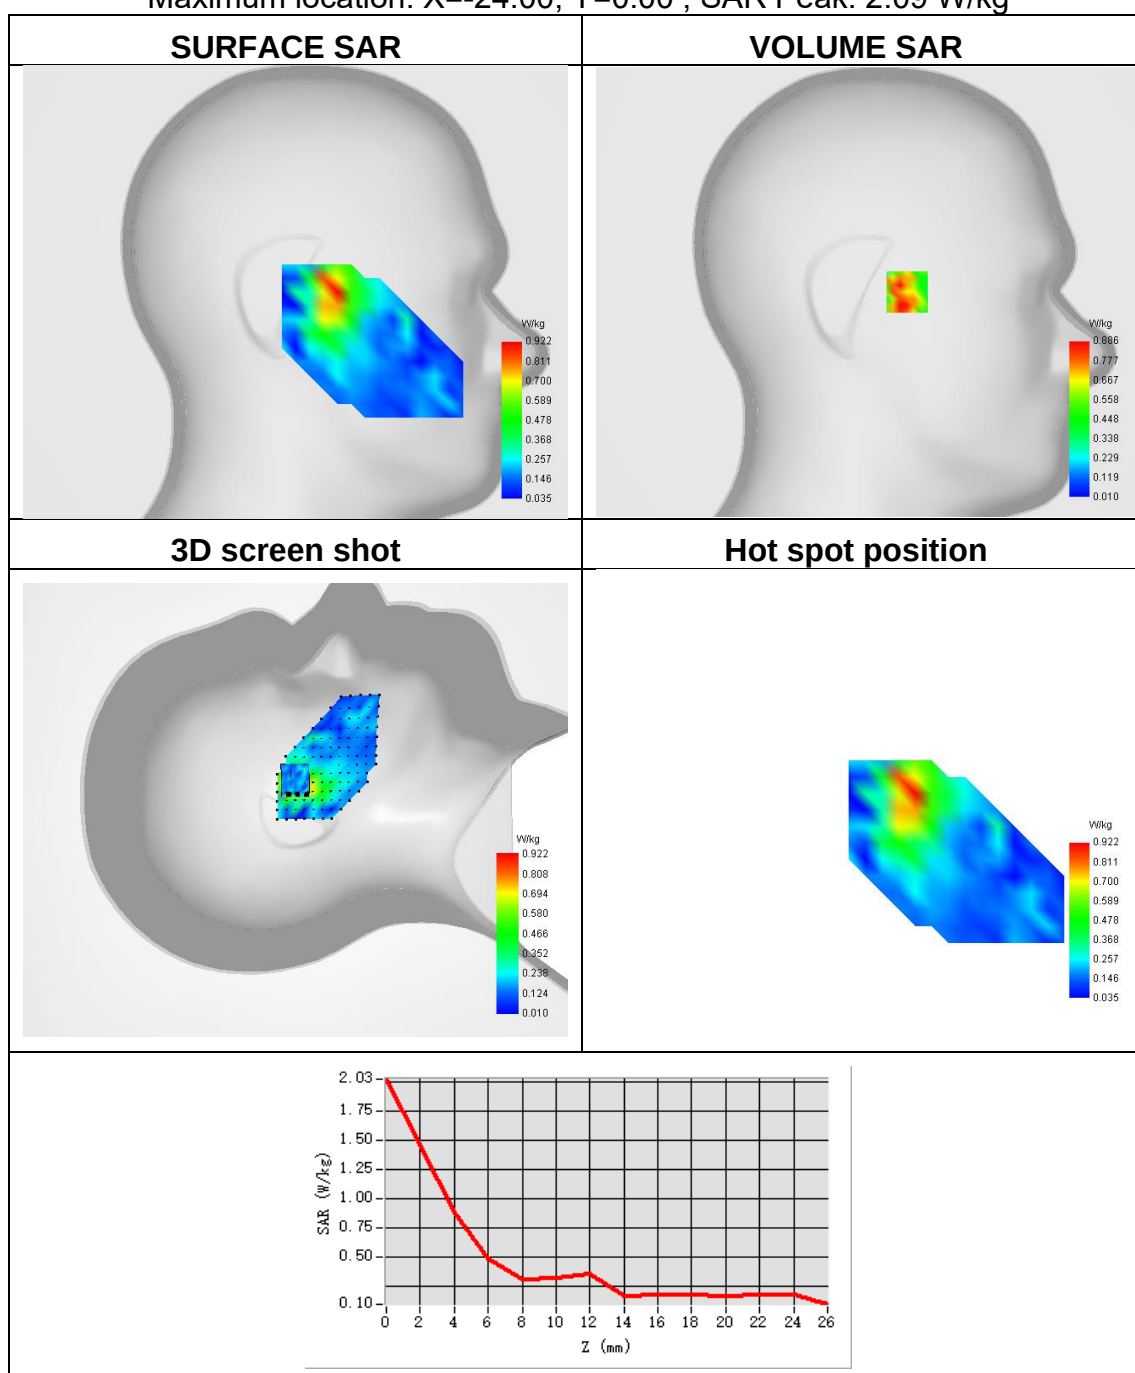




Plot 64:

Test Date	2023-07-15
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	NR N48
Signal	NR TDD
Frequency	3649.98
SAR 10g (W/Kg)	0.247
SAR 1g (W/Kg)	0.574

Maximum location: X=1.00, Y=-17.00 ; SAR Peak: 2.04 W/kg

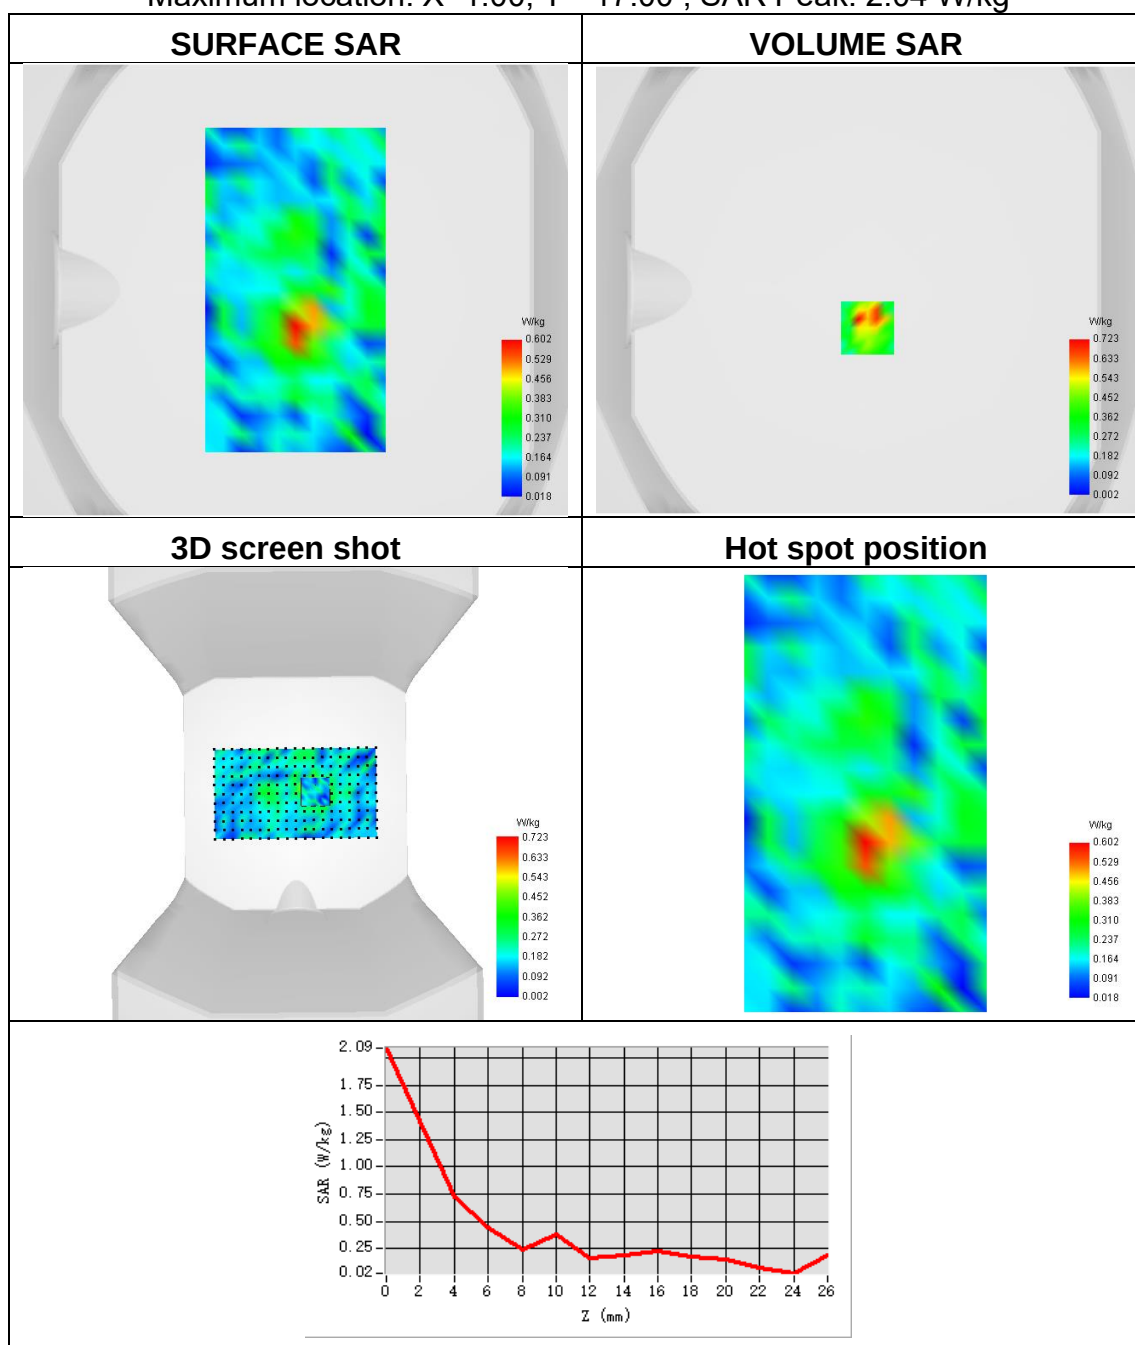



Plot 65:

Test Date	2023-06-21
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left Cheek
Device Position	Cheek
Band	NR N71
Signal	NR FDD
Frequency	688
SAR 10g (W/Kg)	0.065
SAR 1g (W/Kg)	0.143

Maximum location: X=-50.00, Y=-57.00 ; SAR Peak: 0.34 W/kg

