



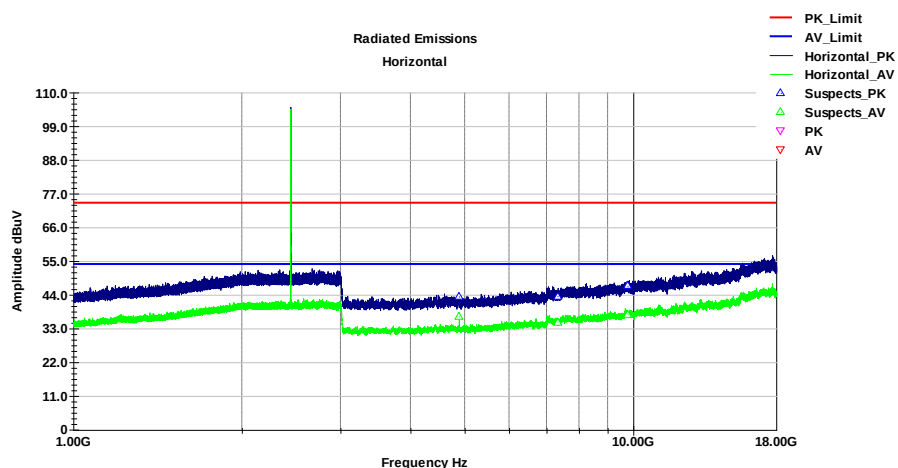

Last Data Update 07:58:47 PM, Friday, August 29, 2025

FreTest_Result

Frequency (MHz)	Measure_PK (dBuV/m)	Measure_AV (dBuV/m)	Cableloss (dB)	Ant_Factor (dBuV/m)	PK (dBuV/m)	PK_Limit (dBuV/m)	Margin (dB)	AV (dBuV/m)	AV_Limit (dBuV/m)	Margin (dB)	HGT (cm)	AZ(Deg)
4882.00	48.87	42.38	-38.50	34.12	43.37	74.00	30.63	36.88	54.00	17.12	153	323
7323.00	45.49	36.94	-37.16	35.86	43.52	74.00	30.48	34.97	54.00	19.03	167	64
9764.00	46.20	36.90	-36.40	37.26	46.87	74.00	27.13	37.57	54.00	16.43	200	106

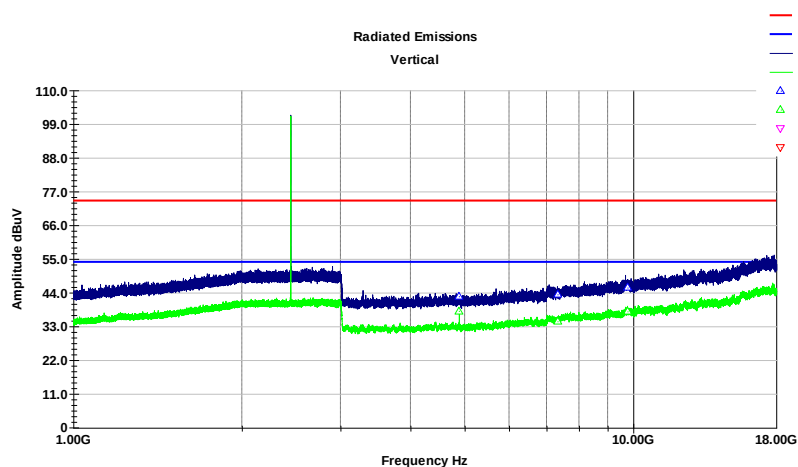


Last Data Update 08:01:34 PM, Friday, August 29, 2025

FreTest_Result

Frequency (MHz)	Measure_PK (dBuV/m)	Measure_AV (dBuV/m)	Cableloss (dB)	Ant_Factor (dBuV/m)	PK (dBuV/m)	PK_Limit (dBuV/m)	Margin (dB)	AV (dBuV/m)	AV_Limit (dBuV/m)	Margin (dB)	HGT (cm)	AZ(Deg)
4882.00	48.26	43.50	-39.62	34.12	42.76	74.00	31.24	38.01	54.00	15.99	157	186
7323.00	45.37	36.58	-37.83	35.86	43.40	74.00	30.60	34.61	54.00	19.39	114	273
9764.00	44.94	37.17	-36.59	37.26	45.62	74.00	28.38	37.84	54.00	16.16	198	10


BT_DH5_High_2480

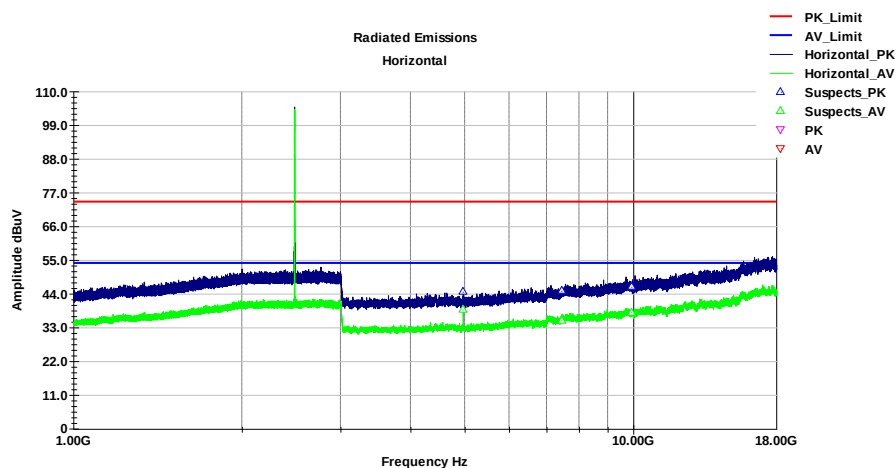

Last Data Update 08:08:36 PM, Friday, August 29, 2025

FreTest_Result

Frequency (MHz)	Measure_PK (dBuV/m)	Measure_AV (dBuV/m)	Cableloss (dB)	Ant_Factor (dBuV/m)	PK (dBuV/m)	PK_Limit (dBuV/m)	Margin (dB)	AV (dBuV/m)	AV_Limit (dBuV/m)	Margin (dB)	HGT (cm)	AZ(Deg)
4960.00	49.78	43.98	-38.67	34.11	44.60	74.00	29.40	38.79	54.00	15.21	121	280
7440.00	47.16	37.57	-36.97	35.89	44.94	74.00	29.06	35.35	54.00	18.65	112	22
9920.00	45.15	36.93	-34.86	37.42	46.23	74.00	27.77	38.01	54.00	15.99	154	360

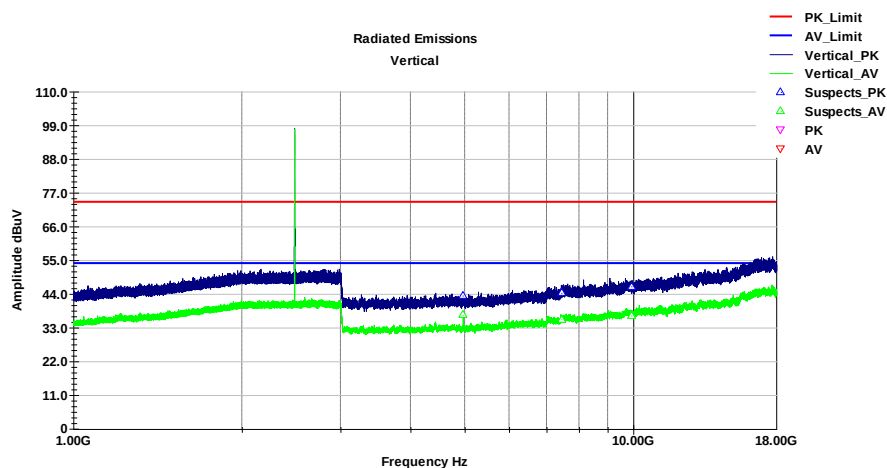


Last Data Update 08:11:21 PM, Friday, August 29, 2025

FreTest_Result

Frequency (MHz)	Measure_PK (dBuV/m)	Measure_AV (dBuV/m)	Cableloss (dB)	Ant_Factor (dBuV/m)	PK (dBuV/m)	PK_Limit (dBuV/m)	Margin (dB)	AV (dBuV/m)	AV_Limit (dBuV/m)	Margin (dB)	HGT (cm)	AZ(Deg)
4960.00	48.59	42.30	-39.29	34.11	43.41	74.00	30.59	37.12	54.00	16.88	135	202
7440.00	46.51	37.90	-38.11	35.89	44.29	74.00	29.71	35.68	54.00	18.32	169	22
9920.00	45.33	35.80	-36.34	37.42	46.41	74.00	27.59	36.88	54.00	17.12	162	325


BT_2DH5_LOW_2402

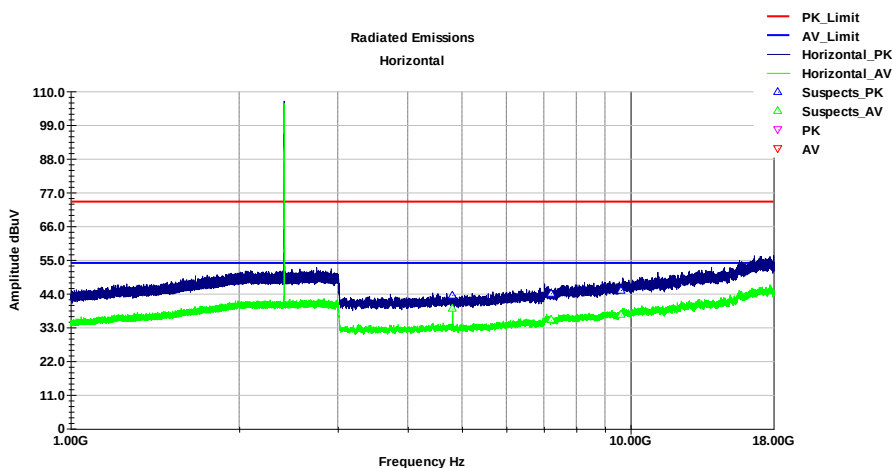

Last Data Update 08:16:49 PM, Friday, August 29, 2025

FreTest_Result

Frequency (MHz)	Measure_PK (dBuV/m)	Measure_AV (dBuV/m)	Cableloss (dB)	Ant_Factor (dBuV/m)	PK (dBuV/m)	PK_Limit (dBuV/m)	Margin (dB)	AV (dBuV/m)	AV_Limit (dBuV/m)	Margin (dB)	HGT (cm)	AZ(Deg)
4804.00	48.97	44.49	-38.63	34.14	43.58	74.00	30.42	39.10	54.00	14.90	158	151
7206.00	46.50	37.87	-37.10	35.84	44.11	74.00	29.89	35.48	54.00	18.52	171	282
9608.00	44.72	36.73	-36.62	37.11	45.17	74.00	28.83	37.18	54.00	16.82	202	66

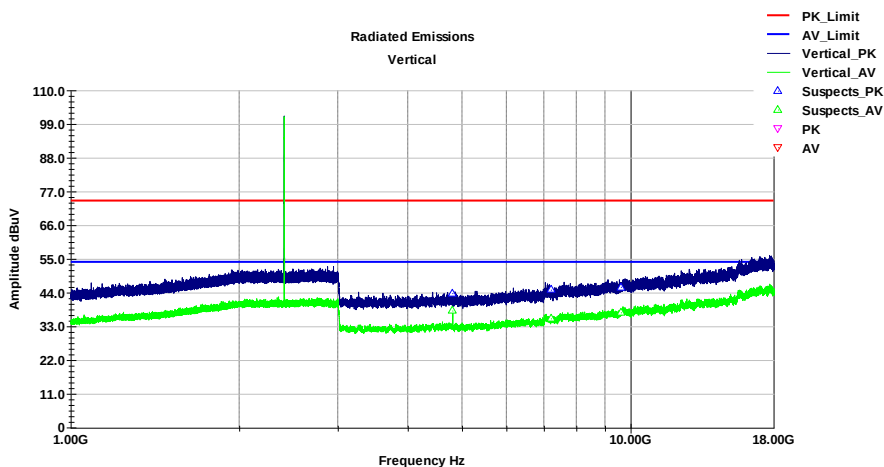


Last Data Update 08:20:37 PM, Friday, August 29, 2025

FreTest_Result

Frequency (MHz)	Measure_PK (dBuV/m)	Measure_AV (dBuV/m)	Cableloss (dB)	Ant_Factor (dBuV/m)	PK (dBuV/m)	PK_Limit (dBuV/m)	Margin (dB)	AV (dBuV/m)	AV_Limit (dBuV/m)	Margin (dB)	HGT (cm)	AZ(Deg)
4804.00	49.18	43.52	-39.53	34.14	43.79	74.00	30.21	38.13	54.00	15.87	158	135
7206.00	47.28	37.97	-38.23	35.84	44.90	74.00	29.10	35.58	54.00	18.42	103	273
9608.00	45.42	37.09	-36.66	37.11	45.87	74.00	28.13	37.54	54.00	16.46	198	92

BT_2DH5_Mid_2441

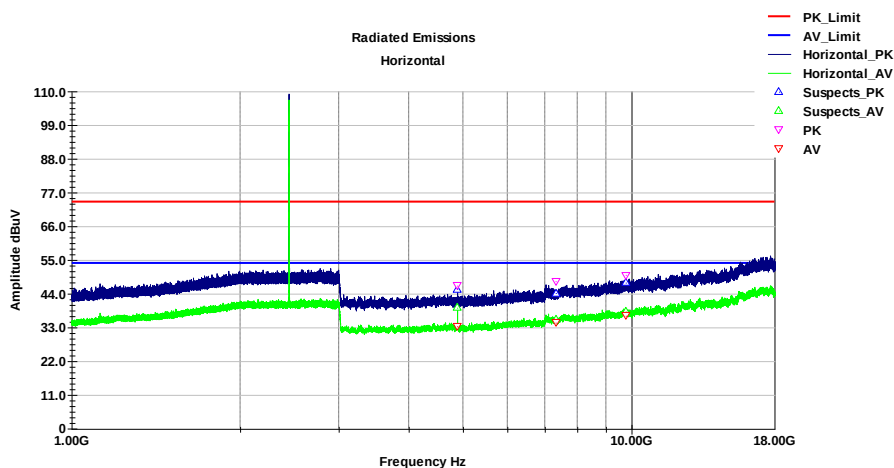


Last Data Update 09:07:37 AM, Saturday, August 30, 2025

FreTest_Result

Frequency (MHz)	Measure_PK (dBuV/m)	Measure_AV (dBuV/m)	Cableloss (dB)	Ant_Factor (dBuV/m)	PK (dBuV/m)	PK_Limit (dBuV/m)	Margin (dB)	AV (dBuV/m)	AV_Limit (dBuV/m)	Margin (dB)	HGT (cm)	AZ(Deg)
4882.00	51.02	44.88	-38.50	34.12	45.53	74.00	28.47	39.38	54.00	14.62	159	194
7323.00	46.17	37.48	-37.16	35.86	44.20	74.00	29.80	35.51	54.00	18.49	142	109
9764.00	46.91	37.43	-36.40	37.26	47.58	74.00	26.42	38.11	54.00	15.89	123	66

FinalTest_Result

Frequency (MHz)	Measure_PK (dBuV/m)	Measure_AV (dBuV/m)	Cableloss (dB)	Ant_Factor (dBuV/m)	PK (dBuV/m)	PK_Limit (dBuV/m)	Margin (dB)	AV (dBuV/m)	AV_Limit (dBuV/m)	Margin (dB)	HGT (cm)	AZ(Deg)
4882.50	52.09	38.84	-39.62	34.12	46.60	74.00	27.40	33.35	54.00	20.65	143	151
7319.00	50.04	36.50	-37.87	35.86	48.04	74.00	25.96	34.50	54.00	19.50	137	64
9765.00	49.41	36.09	-36.58	37.27	50.10	74.00	23.90	36.78	54.00	17.22	169	21

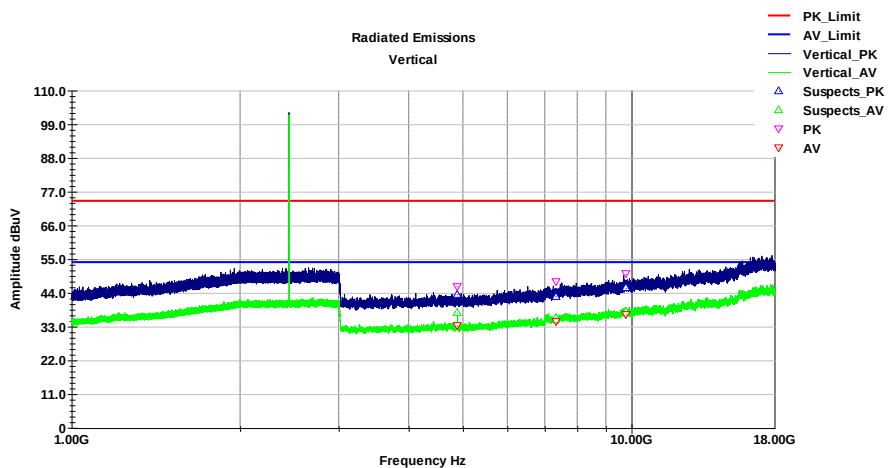

Last Data Update 09:10:58 AM, Saturday, August 30, 2025


FreTest_Result

Frequency (MHz)	Measure_PK (dBuV/m)	Measure_AV (dBuV/m)	Cableloss (dB)	Ant_Factor (dBuV/m)	PK (dBuV/m)	PK_Limit (dBuV/m)	Margin (dB)	AV (dBuV/m)	AV_Limit (dBuV/m)	Margin (dB)	HGT (cm)	AZ(Deg)
4882.00	49.08	42.97	-39.62	34.12	43.59	74.00	30.41	37.47	54.00	16.53	139	19
7323.00	44.85	38.02	-37.83	35.86	42.88	74.00	31.12	36.05	54.00	17.95	201	18
9764.00	44.92	37.37	-36.59	37.26	45.59	74.00	28.41	38.04	54.00	15.96	167	7

FinalTest_Result

Frequency (MHz)	Measure_PK (dBuV/m)	Measure_AV (dBuV/m)	Cableloss (dB)	Ant_Factor (dBuV/m)	PK (dBuV/m)	PK_Limit (dBuV/m)	Margin (dB)	AV (dBuV/m)	AV_Limit (dBuV/m)	Margin (dB)	HGT (cm)	AZ(Deg)
4882.00	51.65	38.75	-39.62	34.12	46.15	74.00	27.85	33.26	54.00	20.74	151	163
7320.50	49.74	36.50	-37.84	35.86	47.76	74.00	26.24	34.53	54.00	19.47	194	120
9763.52	49.45	36.30	-36.60	37.26	50.12	74.00	23.88	36.96	54.00	17.04	128	64


BT_2DH5_High_2480

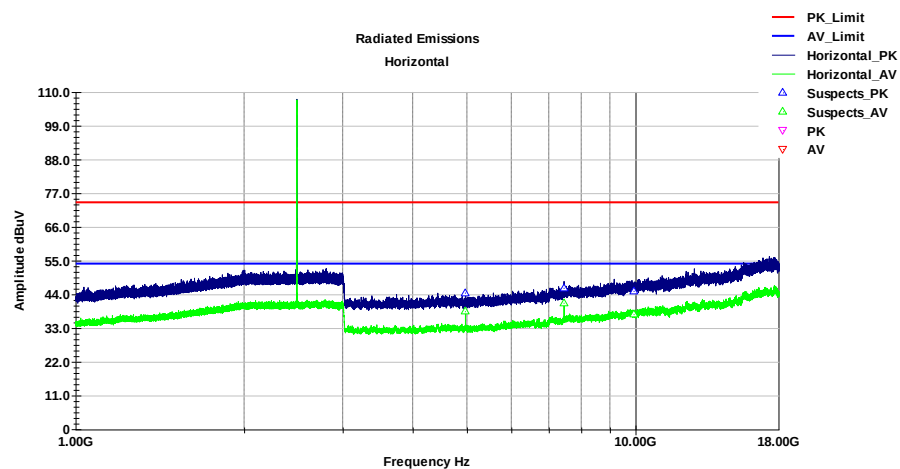

Last Data Update 08:27:59 AM, Saturday, August 30, 2025

FreTest_Result

Frequency (MHz)	Measure_PK (dBuV/m)	Measure_AV (dBuV/m)	Cableloss (dB)	Ant_Factor (dBuV/m)	PK (dBuV/m)	PK_Limit (dBuV/m)	Margin (dB)	AV (dBuV/m)	AV_Limit (dBuV/m)	Margin (dB)	HGT (cm)	AZ(Deg)
4960.00	49.73	43.65	-38.67	34.11	44.55	74.00	29.45	38.47	54.00	15.53	125	195
7440.00	48.32	43.46	-36.97	35.89	46.10	74.00	27.90	41.24	54.00	12.76	183	239
9920.00	44.02	36.42	-34.86	37.42	45.10	74.00	28.90	37.50	54.00	16.50	191	280

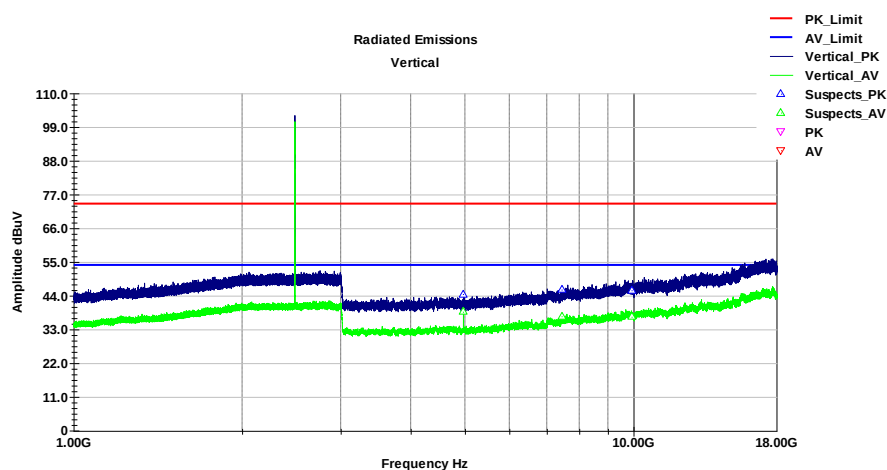


Last Data Update 08:31:58 AM, Saturday, August 30, 2025

FreTest_Result

Frequency (MHz)	Measure_PK (dBuV/m)	Measure_AV (dBuV/m)	Cableloss (dB)	Ant_Factor (dBuV/m)	PK (dBuV/m)	PK_Limit (dBuV/m)	Margin (dB)	AV (dBuV/m)	AV_Limit (dBuV/m)	Margin (dB)	HGT (cm)	AZ(Deg)
4960.00	49.70	43.90	-39.29	34.11	44.52	74.00	29.48	38.72	54.00	15.28	128	174
7440.00	48.18	39.47	-38.11	35.89	45.96	74.00	28.04	37.25	54.00	16.75	154	23
9920.00	44.66	36.00	-36.34	37.42	45.74	74.00	28.26	37.08	54.00	16.92	166	280


BT_3DH5_Low_2402

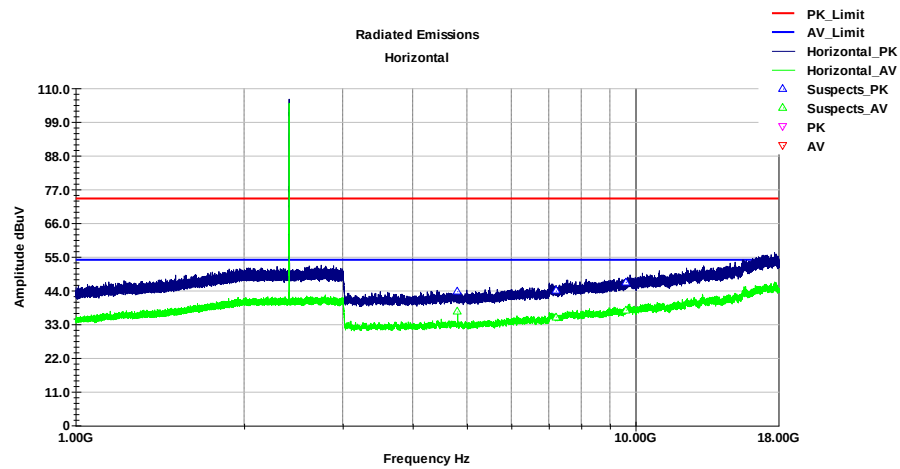

Last Data Update 08:25:47 PM, Friday, August 29, 2025

FreTest_Result

Frequency (MHz)	Measure_PK (dBuV/m)	Measure_AV (dBuV/m)	Cableloss (dB)	Ant_Factor (dBuV/m)	PK (dBuV/m)	PK_Limit (dBuV/m)	Margin (dB)	AV (dBuV/m)	AV_Limit (dBuV/m)	Margin (dB)	HGT (cm)	AZ(Deg)
4804.00	49.15	42.53	-38.63	34.14	43.76	74.00	30.24	37.14	54.00	16.86	125	283
7206.00	46.32	37.84	-37.10	35.84	43.93	74.00	30.07	35.45	54.00	18.55	197	281
9608.00	46.37	37.26	-36.62	37.11	46.82	74.00	27.18	37.71	54.00	16.29	150	154

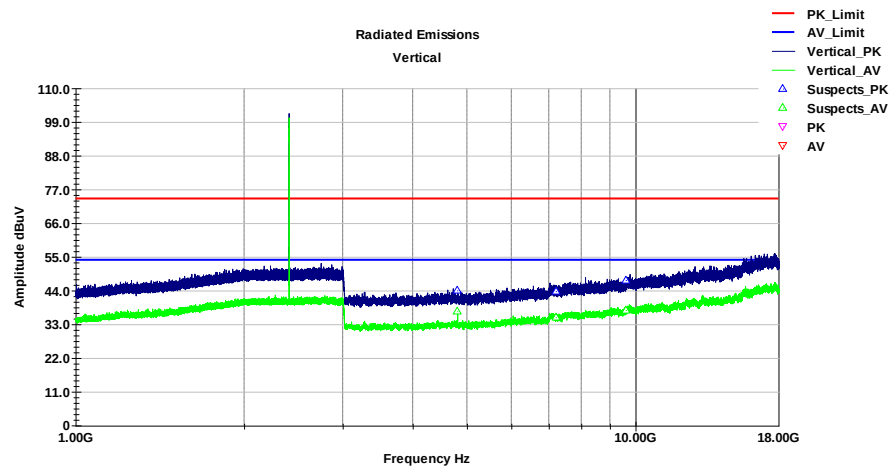


Last Data Update 08:30:19 PM, Friday, August 29, 2025

FreTest_Result

Frequency (MHz)	Measure_PK (dBuV/m)	Measure_AV (dBuV/m)	Cableloss (dB)	Ant_Factor (dBuV/m)	PK (dBuV/m)	PK_Limit (dBuV/m)	Margin (dB)	AV (dBuV/m)	AV_Limit (dBuV/m)	Margin (dB)	HGT (cm)	AZ(Deg)
4804.00	49.40	42.62	-39.53	34.14	44.01	74.00	29.99	37.23	54.00	16.77	114	303
7206.00	46.15	37.65	-38.23	35.84	43.77	74.00	30.23	35.26	54.00	18.74	156	28
9608.00	46.95	37.16	-36.66	37.11	47.40	74.00	26.60	37.60	54.00	16.40	139	97


BT_3DH5_Mid_2441

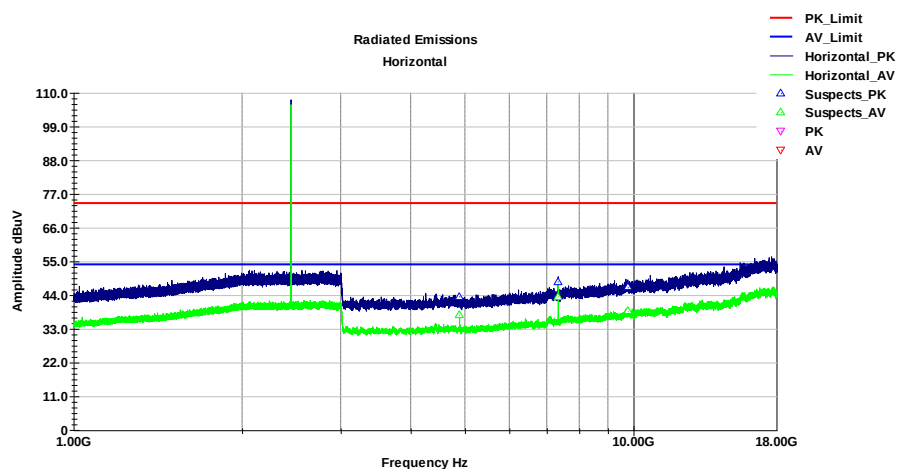

Last Data Update 09:19:02 AM, Saturday, August 30, 2025

FreTest_Result

Frequency (MHz)	Measure_PK (dBuV/m)	Measure_AV (dBuV/m)	Cableloss (dB)	Ant_Factor (dBuV/m)	PK (dBuV/m)	PK_Limit (dBuV/m)	Margin (dB)	AV (dBuV/m)	AV_Limit (dBuV/m)	Margin (dB)	HGT (cm)	AZ(Deg)
4882.00	49.08	42.91	-38.50	34.12	43.59	74.00	30.41	37.42	54.00	16.58	187	80
7323.00	50.37	45.48	-37.16	35.86	48.40	74.00	25.60	43.51	54.00	10.49	190	2
9764.00	45.85	38.07	-36.40	37.26	46.52	74.00	27.48	38.74	54.00	15.26	150	253

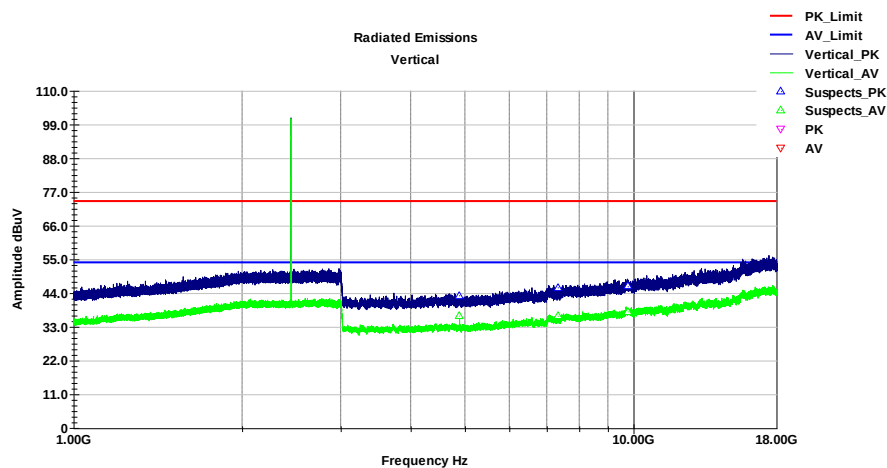


Last Data Update 09:26:18 AM, Saturday, August 30, 2025

FreTest_Result

Frequency (MHz)	Measure_PK (dBuV/m)	Measure_AV (dBuV/m)	Cableloss (dB)	Ant_Factor (dBuV/m)	PK (dBuV/m)	PK_Limit (dBuV/m)	Margin (dB)	AV (dBuV/m)	AV_Limit (dBuV/m)	Margin (dB)	HGT (cm)	AZ(Deg)
4882.00	48.77	42.11	-39.62	34.12	43.27	74.00	30.73	36.61	54.00	17.39	129	302
7323.00	47.82	38.55	-37.83	35.86	45.85	74.00	28.15	36.58	54.00	17.42	154	98
9764.00	45.53	37.31	-36.59	37.26	46.20	74.00	27.80	37.99	54.00	16.01	121	70


BT_3DH5_High_2480

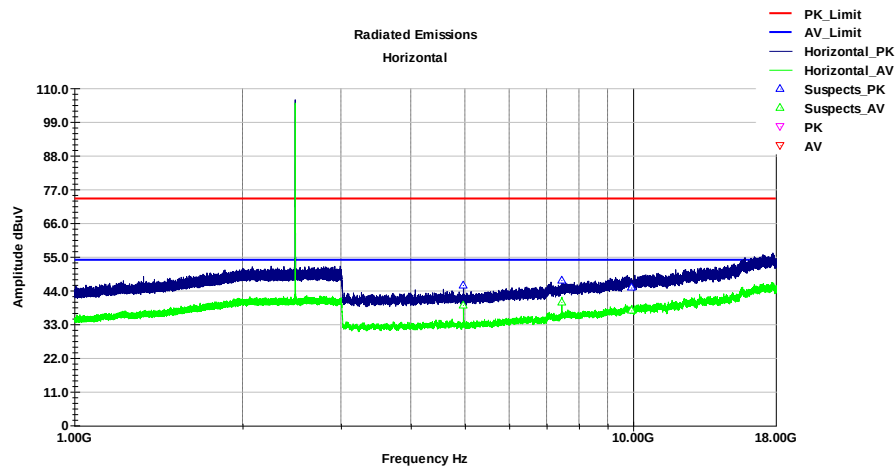

Last Data Update 08:43:47 PM, Friday, August 29, 2025

FreTest_Result

Frequency (MHz)	Measure_PK (dBuV/m)	Measure_AV (dBuV/m)	Cableloss (dB)	Ant_Factor (dBuV/m)	PK (dBuV/m)	PK_Limit (dBuV/m)	Margin (dB)	AV (dBuV/m)	AV_Limit (dBuV/m)	Margin (dB)	HGT (cm)	AZ(Deg)
4960.00	50.95	44.46	-38.67	34.11	45.77	74.00	28.23	39.27	54.00	14.73	187	323
7440.00	49.59	42.48	-36.97	35.89	47.37	74.00	26.63	40.26	54.00	13.74	198	64
9920.00	43.86	36.40	-34.86	37.42	44.94	74.00	29.06	37.48	54.00	16.52	143	20

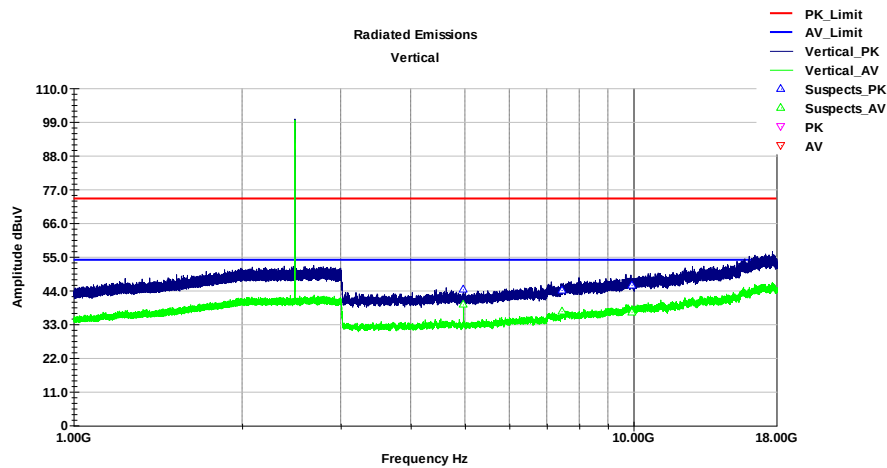

Last Data Update 08:46:20 PM, Friday, August 29, 2025


FreTest_Result

Frequency (MHz)	Measure_PK (dBuV/m)	Measure_AV (dBuV/m)	Cableloss (dB)	Ant_Factor (dBuV/m)	PK (dBuV/m)	PK_Limit (dBuV/m)	Margin (dB)	AV (dBuV/m)	AV_Limit (dBuV/m)	Margin (dB)	HGT (cm)	AZ(Deg)
4960.00	49.51	44.63	-39.29	34.11	44.33	74.00	29.67	39.45	54.00	14.55	148	32
7440.00	46.37	39.49	-38.11	35.89	44.15	74.00	29.85	37.27	54.00	16.73	177	24
9920.00	44.75	35.98	-36.34	37.42	45.83	74.00	28.17	37.06	54.00	16.94	200	210

WORST CASE 18GHz-40GHz


SPURIOUS EMISSIONS 18GHz-40GHz (WORST-CASE CONFIGURATION)

BT_3DH5_Mid_2441

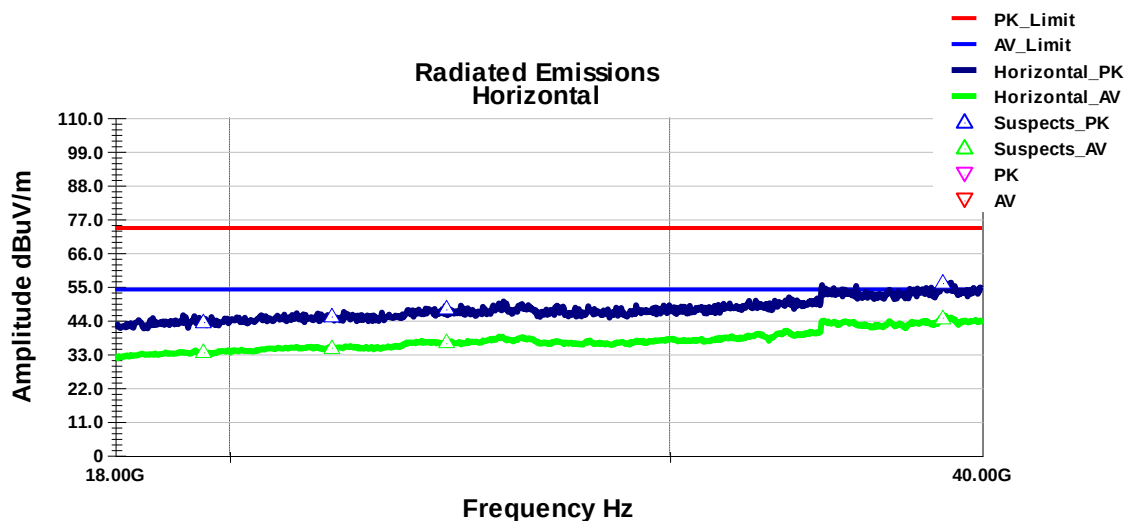

FreTest_Result

Frequency (MHz)	Meas_PK (dBuV)	Meas_AV (dB)	Cableloss (dB)	Factor (dB/m)	PK (dBuV/m)	Limit (dBuV/m)	Margin (dB)	AV (dBuV/m)	Limit (dBuV/m)	Margin (dB)	AZ (Deg)	HGT (cm)
19528.00	27.98	18.07	-29.16	44.72	43.53	74.00	30.47	33.63	54.00	20.37	111	150
21969.00	28.88	18.79	-29.06	45.48	45.31	74.00	28.69	35.21	54.00	18.79	215	150
24410.00	30.22	19.23	-28.23	45.65	47.63	74.00	26.37	36.64	54.00	17.36	36	150
38570.00	36.11	24.84	-26.83	46.92	56.20	74.00	17.80	44.93	54.00	9.07	2	150

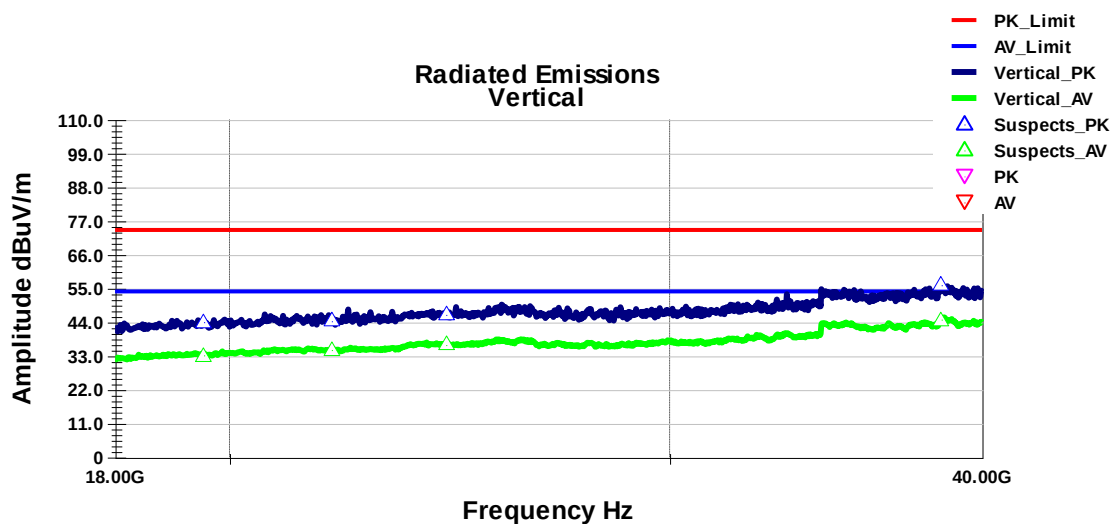

FreTest_Result

Frequency (MHz)	Meas_PK (dBuV)	Meas_AV (dB)	Cableloss (dB)	Factor (dB/m)	PK (dBuV/m)	Limit (dBuV/m)	Margin (dB)	AV (dBuV/m)	Limit (dBuV/m)	Margin (dB)	AZ (Deg)	HGT (cm)
19528.00	28.58	17.77	-29.17	44.72	44.13	74.00	29.87	33.32	54.00	20.68	158	150
21969.00	28.02	18.61	-29.06	45.48	44.44	74.00	29.56	35.03	54.00	18.97	159	150

	24410.00	29.07	19.26	-28.23	45.65	46.48	74.00	27.52	36.67	54.00	17.33	178	150	
	38526.00	35.93	24.72	-26.69	46.91	56.15	74.00	17.85	44.95	54.00	9.05	105	150	

4.12 Radiated Band Edge (Restricted-band band-edge)

4.12.1 Limit

Refer to FCC §15.209&15.247(d)

Frequency range (MHz)	Limit (dBuV/m)	Remark
30 – 88	40.0	Quasi-peak
88 – 216	43.5	Quasi-peak
216 - 960	46.0	Quasi-peak
960 - 1000	54.0	Quasi-peak
Above 1000	54.0	Average Value
	74.0	Peak Value

4.12.2 Test Procedure

For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements. For final scans above 1 GHz the resolution bandwidth is set to 1 MHz. then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T (10 Hz) video bandwidth with peak detector for average measurements.

The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel.

Test the EUT in the lowest channel , the Highest channel.

The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.

Repeat above procedures until all frequencies measured was complete.

Measure and record the results in the test report.

KDB 558074 D01 15.247 Meas Guidance v05r02

Use of a duty cycle correction factor (DCCF) is permitted for calculating average radiated field strength emission levels for an FHSS device in 15.247.

This DCCF can be applied when the field strength limit (e.g., within a Government Restricted band) and the conditions specified in Section 15.35(c) can be satisfied.

The average radiated field strength is calculated by subtracting the DCCF from the maximum radiated field strength level as determined through measurement.

The maximum radiated field strength level represents the worst-case (maximum amplitude) RMS measurement of the emission(s) during continuous transmission (i.e., not including any time intervals during which the transmitter is off or is transmitting at a reduced power level).

It is also acceptable to apply the DCCF to a measurement performed with a peak detector instead of the specified RMS power averaging detector.

Note that Section 15.35(c) specifies that the DCCF shall represent the worst-case (greatest duty cycle) over any 100 msec transmission period.

$$DCCF = 20 \cdot \log(\text{Duty cycle})$$

$$\text{Average Emission Level} = \text{Peak Emission Level} + DCCF.$$

$$\text{Level} = \text{Measure level} + \text{Ant Factor} + \text{Cable loss}$$

4.12.3 Test Setup

See section 3.5.3 to 3.5.5 for test setup.

The photo of test setup please refer to ANNEX B.

4.12.4 Test Results

The detailed test data:

TestMode	Antenna	ChName	Freq (MHz)	Result [dBm]	Limit[dBm]	Verdict
BT_DH5	Ant1	Low	2402	See test graph	See test graph	PASS
		High	2480	See test graph	See test graph	PASS
BT_2DH5	Ant1	Low	2402	See test graph	See test graph	PASS
		High	2480	See test graph	See test graph	PASS
BT_3DH5	Ant1	Low	2402	See test graph	See test graph	PASS
		High	2480	See test graph	See test graph	PASS

DCCF:

TestMode	Antenna	Freq(MHz)	ON Time [ms]	Period [ms]	number	DC [%]	DCCF
DH5	Ant1	2402	2.89	100	2	5.78	-24.76
		2441	2.90	100	2	5.80	-24.73
		2480	2.89	100	2	5.78	-24.76
2DH5	Ant1	2402	2.89	100	2	5.78	-24.76
		2441	2.89	100	2	5.78	-24.76
		2480	2.89	100	2	5.78	-24.76
3DH5	Ant1	2402	2.89	100	2	5.78	-24.76
		2441	2.89	100	2	5.78	-24.76
		2480	2.89	100	2	5.78	-24.76


1.Worst case Duty cycle=on time/100 milliseconds=2*2.90/100=5.80%

2.Worst case Duty cycle correction factor=20*log(Duty cycle)=-24.73


3.DH5 has the highest duty cycle worst case and is reported

4.Average emissions were not reported since the duty cycle correction factor was greater than 20dB

Test Graphs:

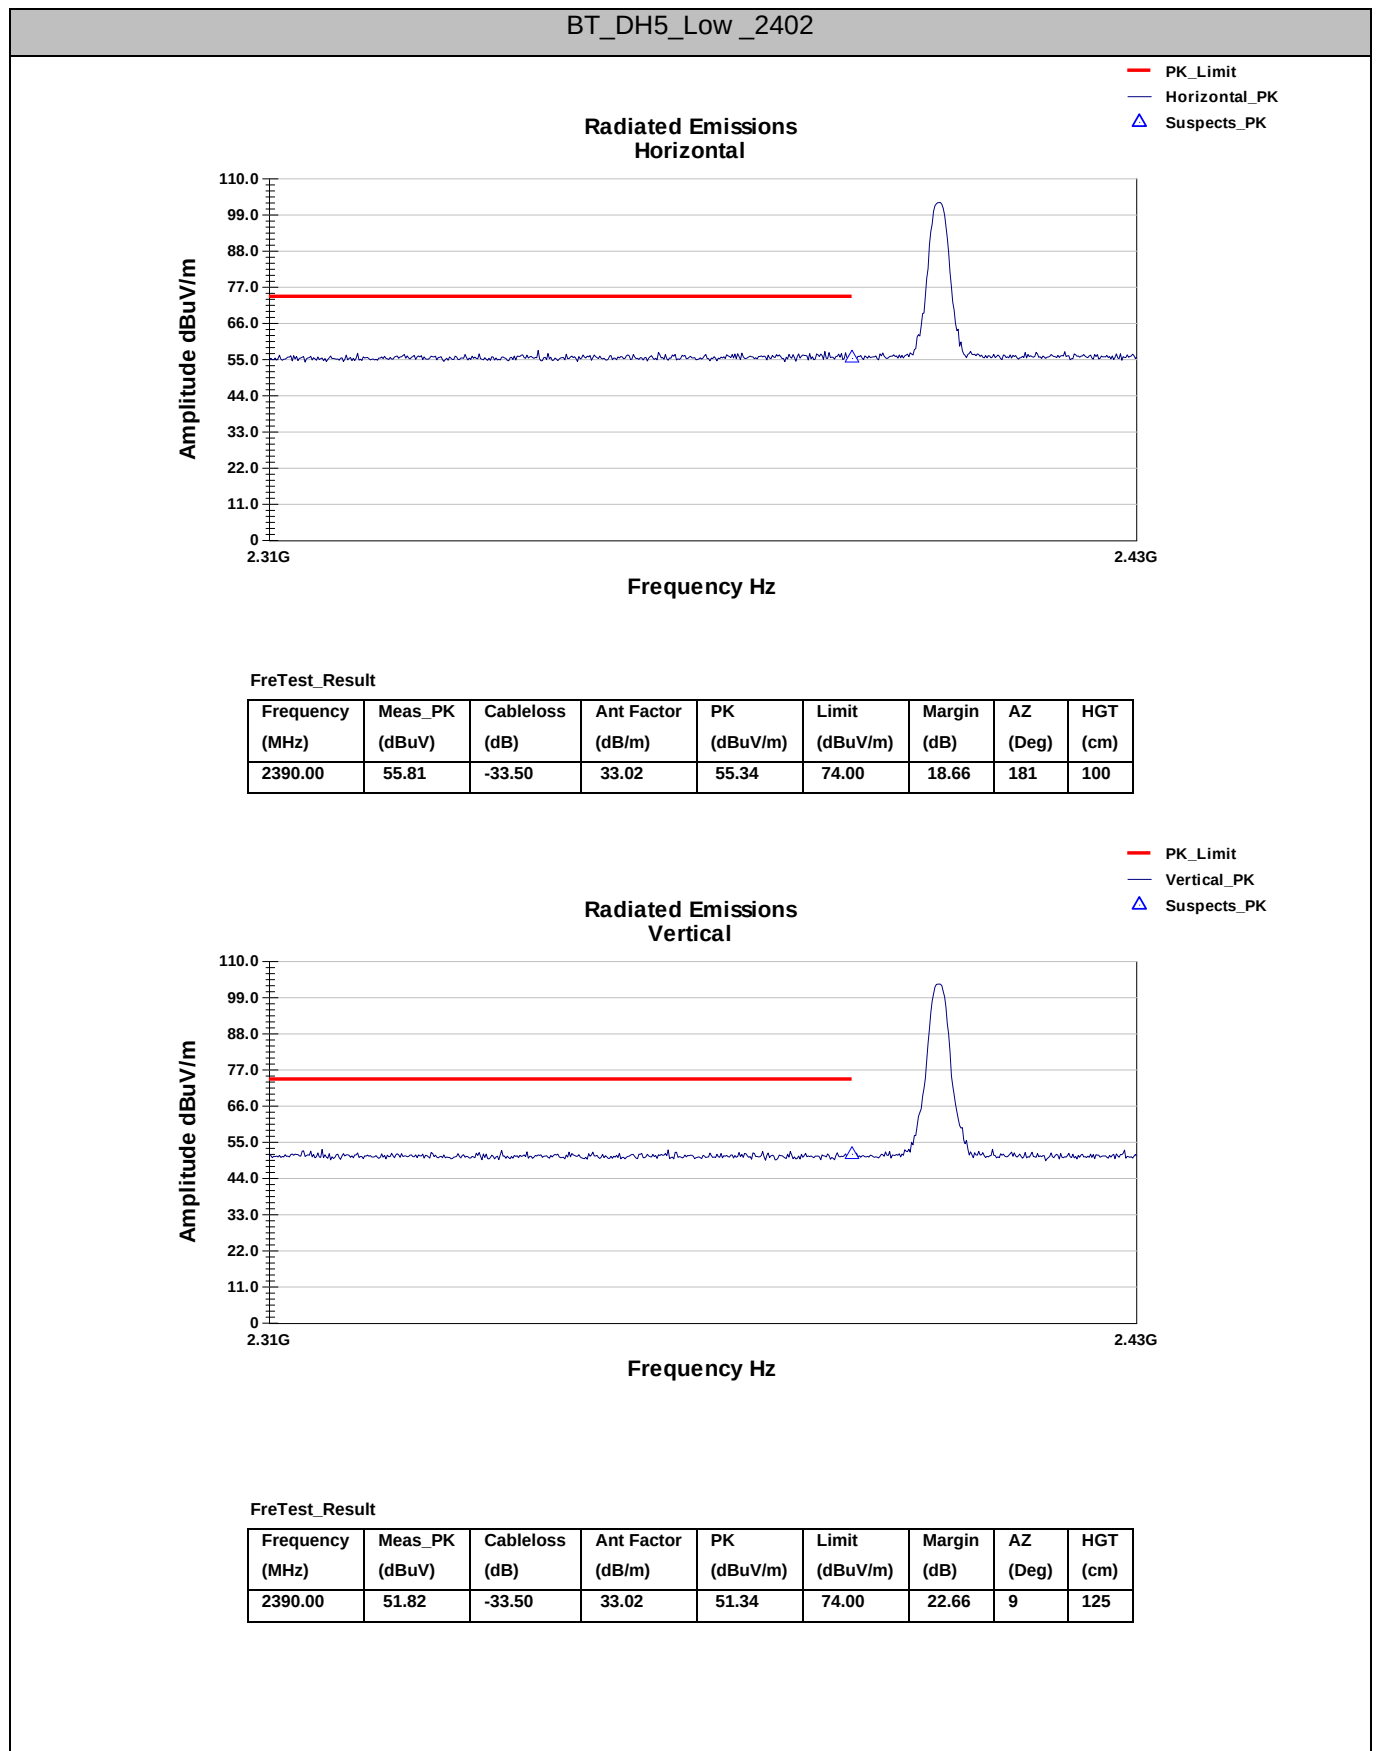


BT_DH5_High_2480

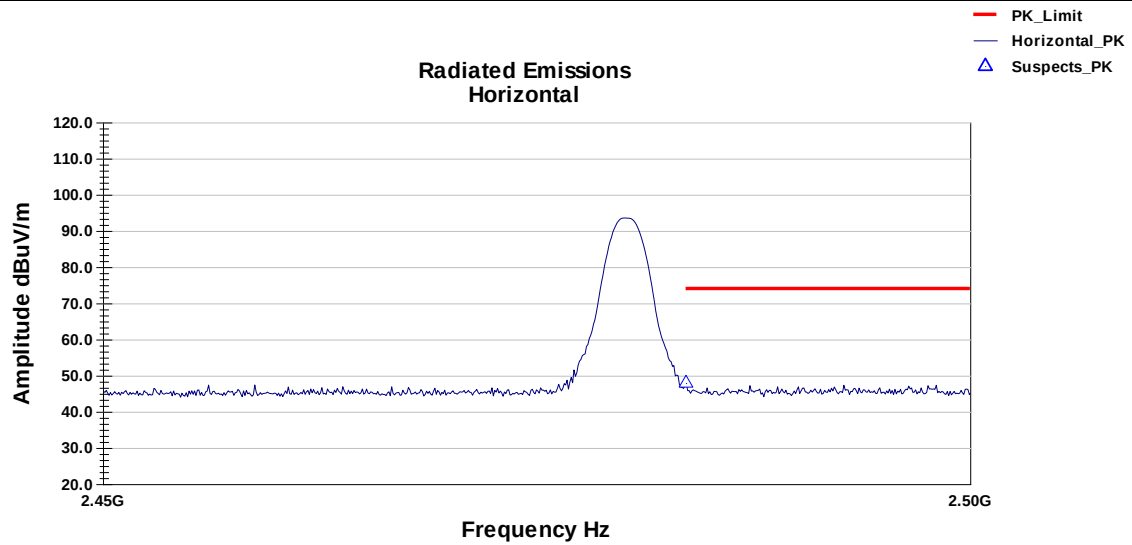

FreTest_Result


Frequency (MHz)	Meas_PK (dBuV)	Cableloss (dB)	Ant Factor (dB/m)	PK (dBuV/m)	Limit (dBuV/m)	Margin (dB)	AZ (Deg)	HGT (cm)
2483.50	53.81	-38.87	33.00	47.95	74.00	26.05	142	155

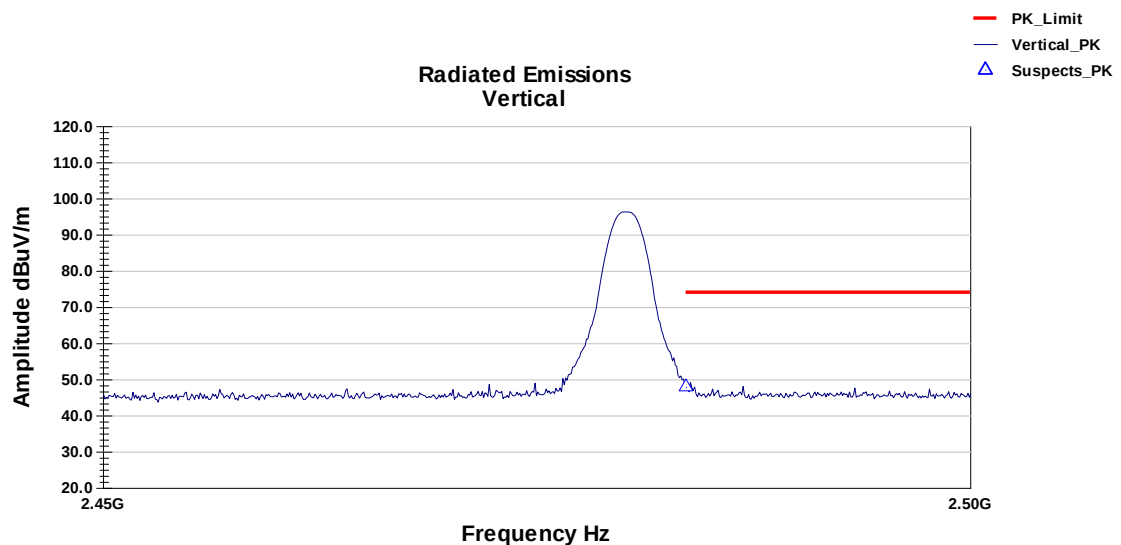

FreTest_Result


Frequency (MHz)	Meas_PK (dBuV)	Cableloss (dB)	Ant Factor (dB/m)	PK (dBuV/m)	Limit (dBuV/m)	Margin (dB)	AZ (Deg)	HGT (cm)
2483.50	53.71	-38.87	33.00	47.85	74.00	26.15	74	100

BT_2DH5_Low_2402

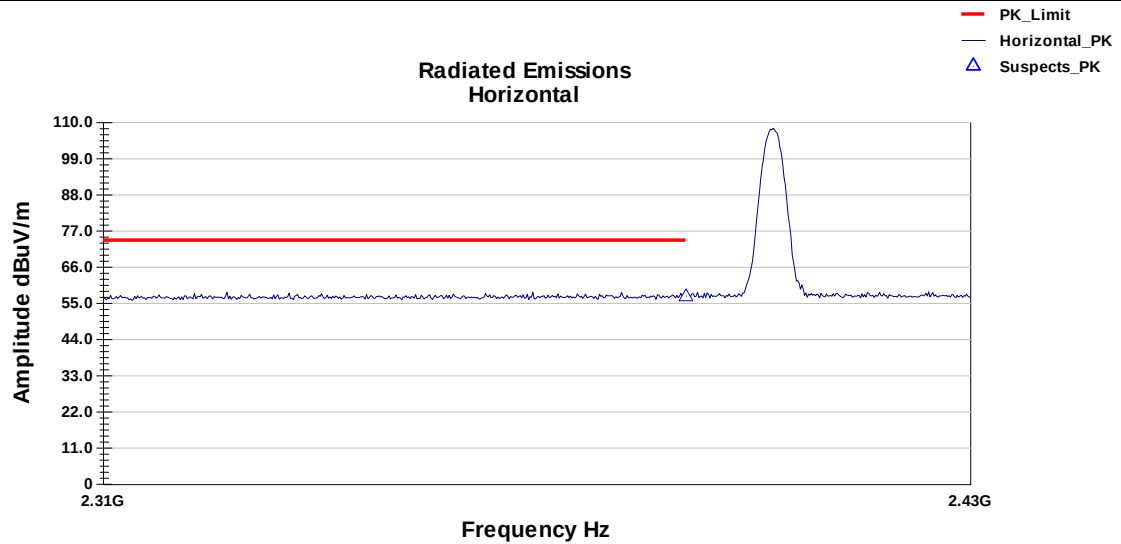

FreTest_Result


Frequency (MHz)	Meas_PK (dBuV)	Cableloss (dB)	Ant Factor (dB/m)	PK (dBuV/m)	Limit (dBuV/m)	Margin (dB)	AZ (Deg)	HGT (cm)
2390.00	57.70	-33.50	33.02	57.23	74.00	16.77	153	198

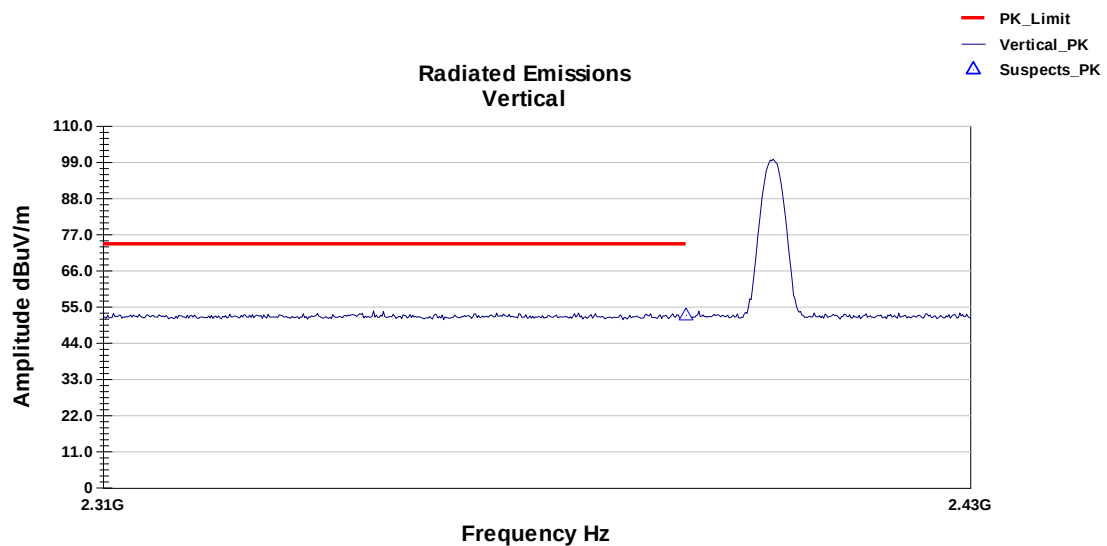

FreTest_Result


Frequency (MHz)	Meas_PK (dBuV)	Cableloss (dB)	Ant Factor (dB/m)	PK (dBuV/m)	Limit (dBuV/m)	Margin (dB)	AZ (Deg)	HGT (cm)
2390.00	52.93	-33.50	33.02	52.45	74.00	21.55	83	165

BT_2DH5_High_2480

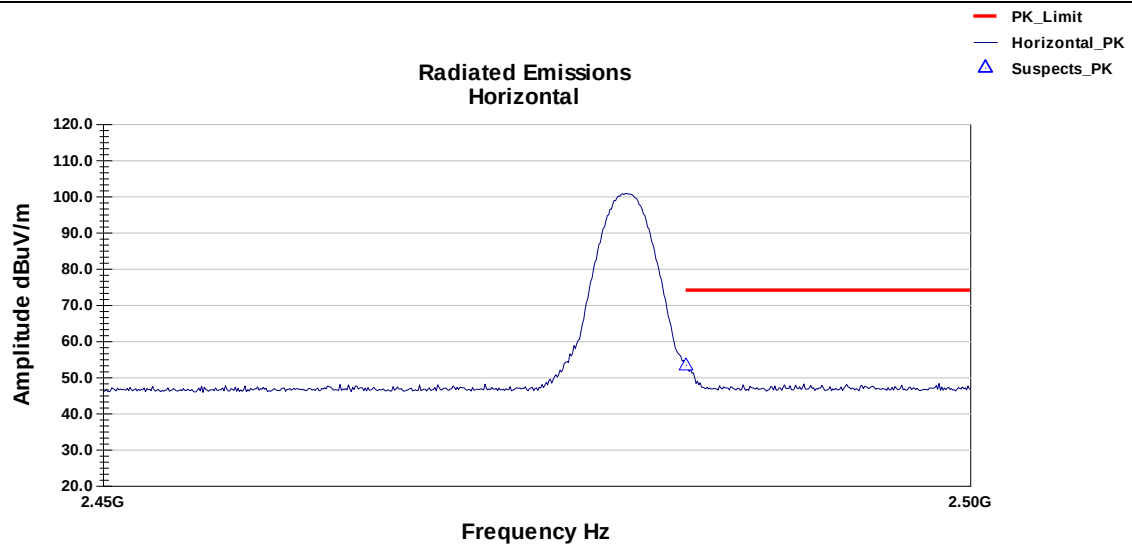

FreTest_Result


Frequency (MHz)	Meas_PK (dBuV)	Cableloss (dB)	Ant Factor (dB/m)	PK (dBuV/m)	Limit (dBuV/m)	Margin (dB)	AZ (Deg)	HGT (cm)
2483.50	59.28	-38.86	33.00	53.41	74.00	20.59	25	156

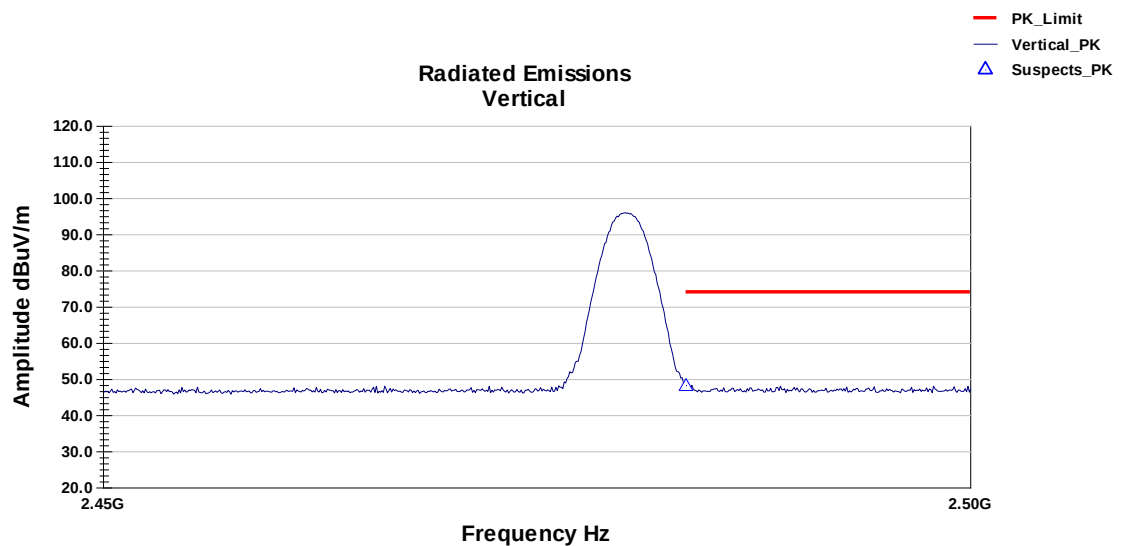

FreTest_Result


Frequency (MHz)	Meas_PK (dBuV)	Cableloss (dB)	Ant Factor (dB/m)	PK (dBuV/m)	Limit (dBuV/m)	Margin (dB)	AZ (Deg)	HGT (cm)
2483.50	54.19	-38.87	33.00	48.32	74.00	25.68	56	199

BT_3DH5_Low_2402

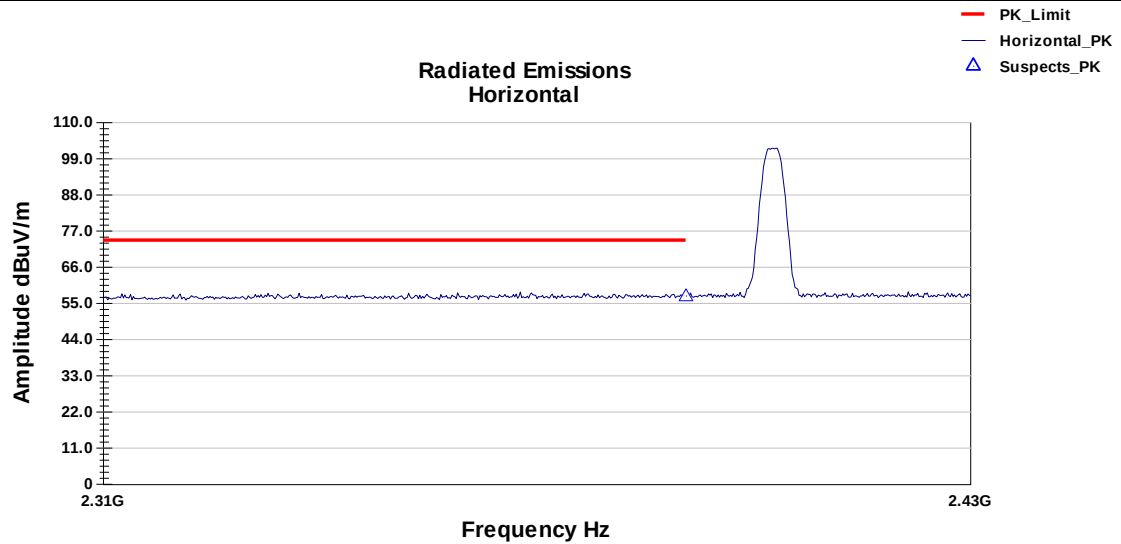

FreTest_Result


Frequency (MHz)	Meas_PK (dBuV)	Cableloss (dB)	Ant Factor (dB/m)	PK (dBuV/m)	Limit (dBuV/m)	Margin (dB)	AZ (Deg)	HGT (cm)
2390.00	57.73	-33.50	33.02	57.25	74.00	16.75	77	110

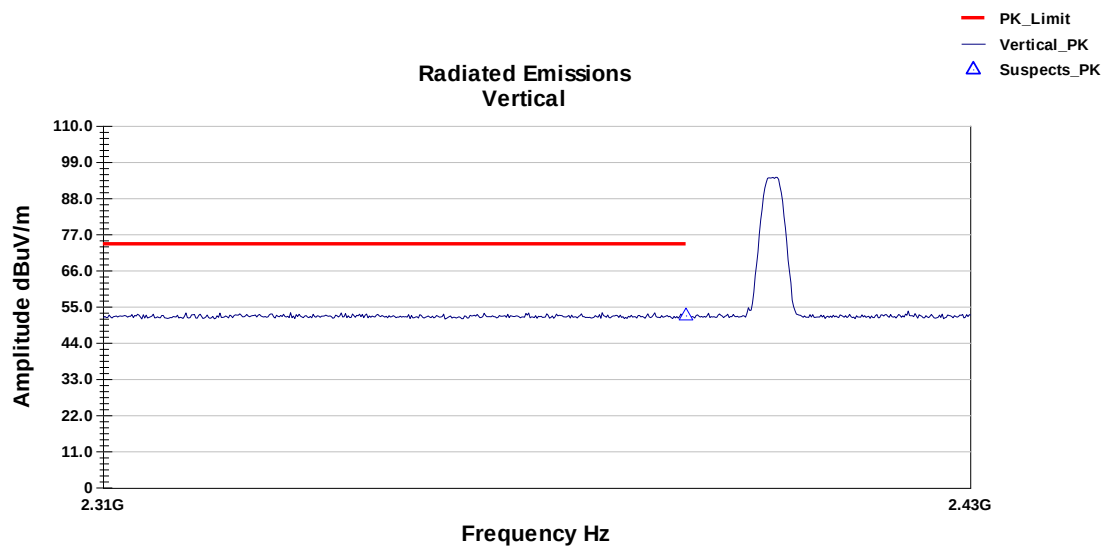

FreTest_Result


Frequency (MHz)	Meas_PK (dBuV)	Cableloss (dB)	Ant Factor (dB/m)	PK (dBuV/m)	Limit (dBuV/m)	Margin (dB)	AZ (Deg)	HGT (cm)
2390.00	52.78	-33.50	33.02	52.30	74.00	21.70	203	154

BT_3DH5_High_2480

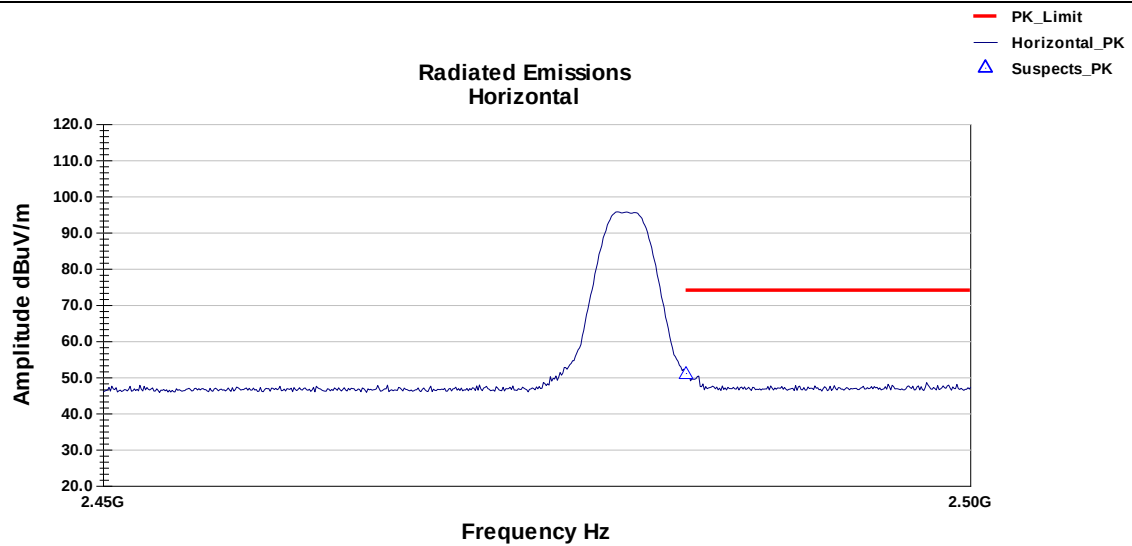

FreTest_Result

Frequency (MHz)	Meas_PK (dBuV)	Cableloss (dB)	Ant Factor (dB/m)	PK (dBuV/m)	Limit (dBuV/m)	Margin (dB)	AZ (Deg)	HGT (cm)
2483.50	57.04	-38.86	33.00	51.17	74.00	22.83	74	125

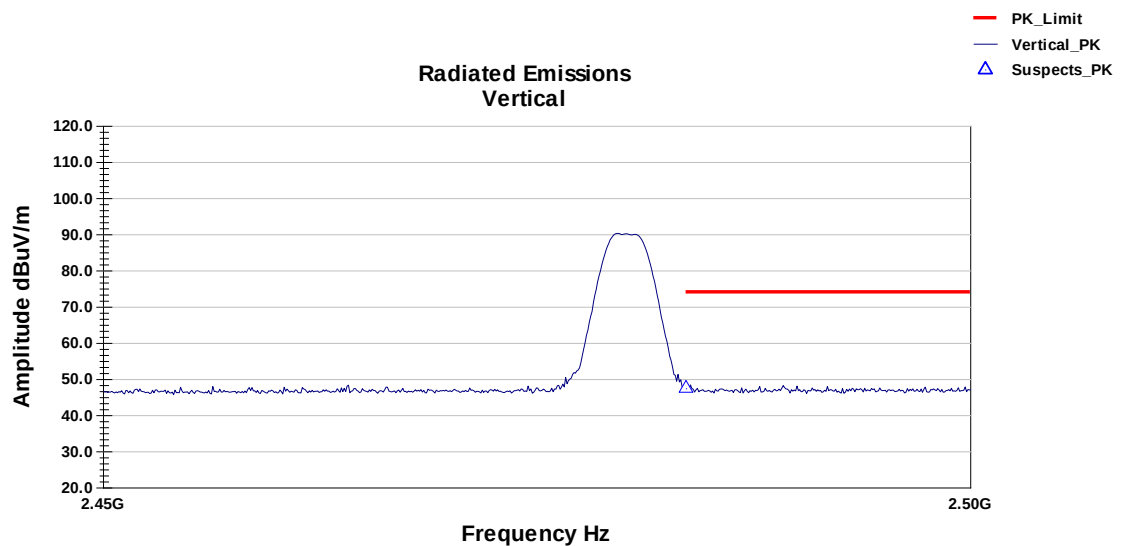


FreTest_Result


Frequency (MHz)	Meas_PK (dBuV)	Cableloss (dB)	Ant Factor (dB/m)	PK (dBuV/m)	Limit (dBuV/m)	Margin (dB)	AZ (Deg)	HGT (cm)
2483.50	53.28	-38.87	33.00	47.42	74.00	26.58	153	187

ANNEX A Duty Cycle


TestMode	Antenna	Freq(MHz)	ON Time [ms]	Period [ms]	DC [%]	xFactor
DH5	Ant1	2402	2.89	3.75	77.07	1.13
		2441	2.90	3.76	77.13	1.13
		2480	2.89	3.75	77.07	1.13
2DH5	Ant1	2402	2.89	3.75	77.07	1.13
		2441	2.89	3.75	77.07	1.13
		2480	2.89	3.75	77.07	1.13
3DH5	Ant1	2402	2.89	3.75	77.07	1.13
		2441	2.89	3.75	77.07	1.13
		2480	2.89	3.75	77.07	1.13

Test Graphs:

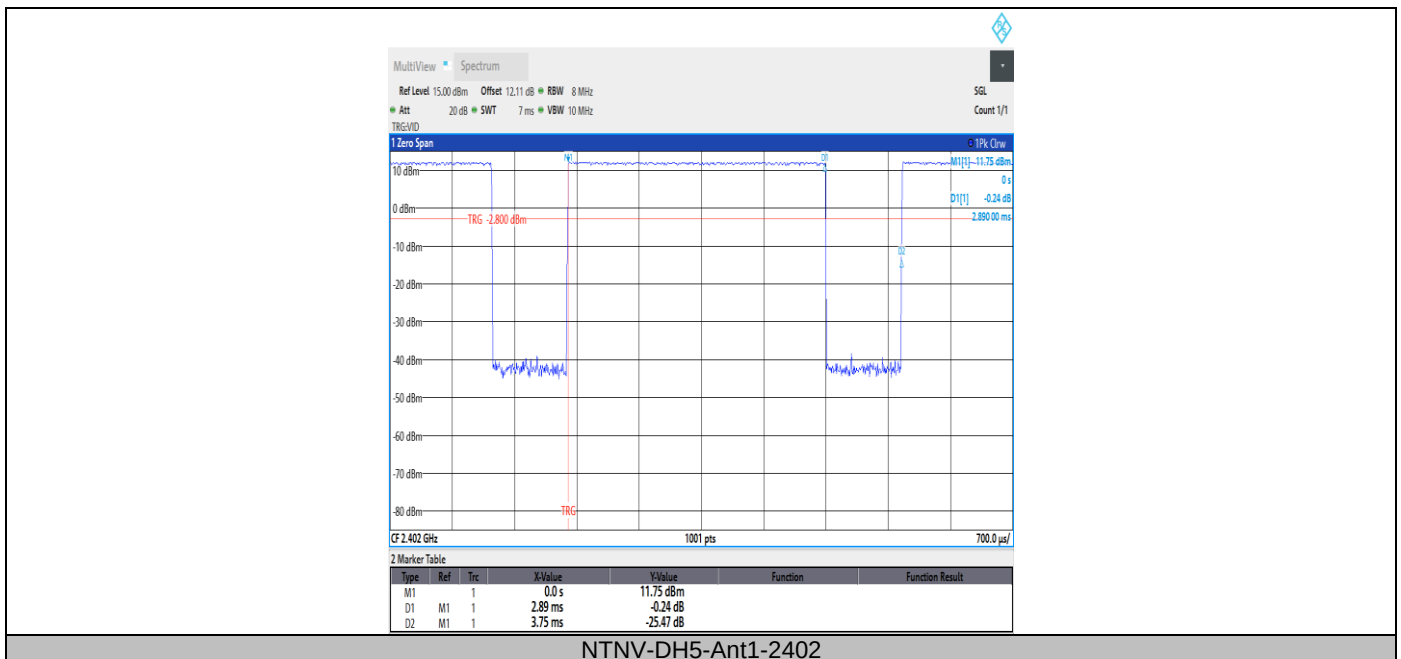


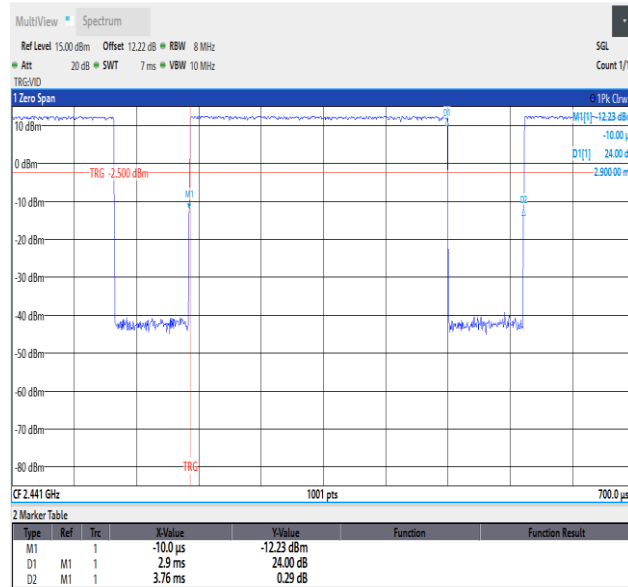


NTNV-DH5-Ant1-2441

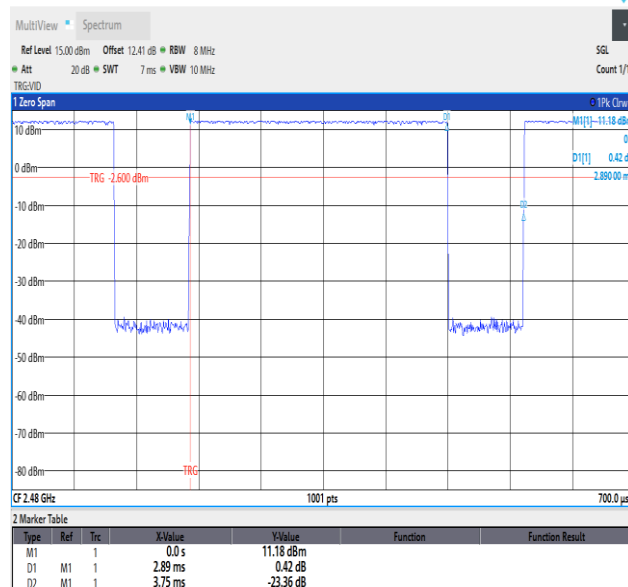


NTNV-DH5-Ant1-2480

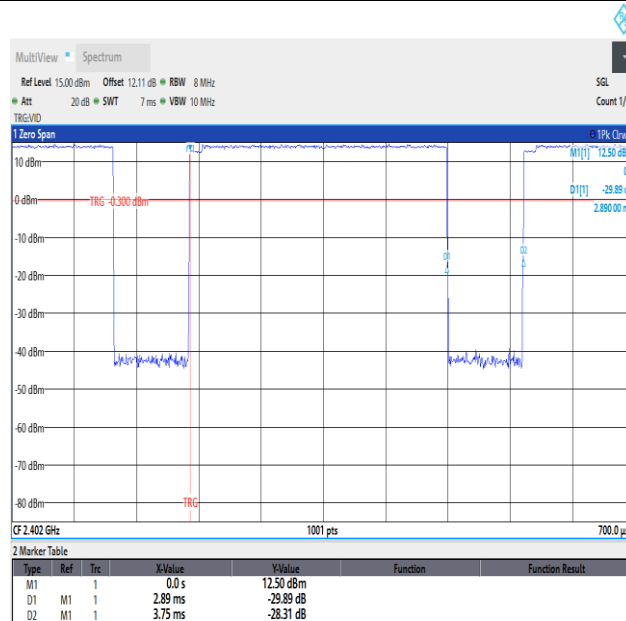


NTNV-2DH5-Ant1-2402

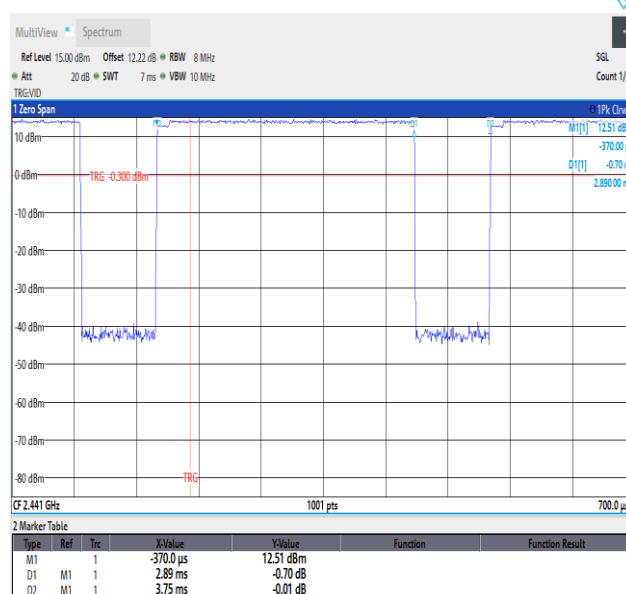


NTNV-2DH5-Ant1-2441

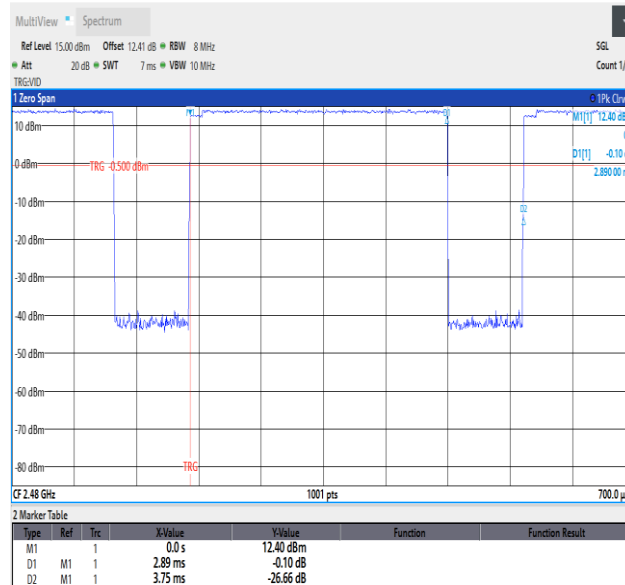


NTNV-2DH5-Ant1-2480

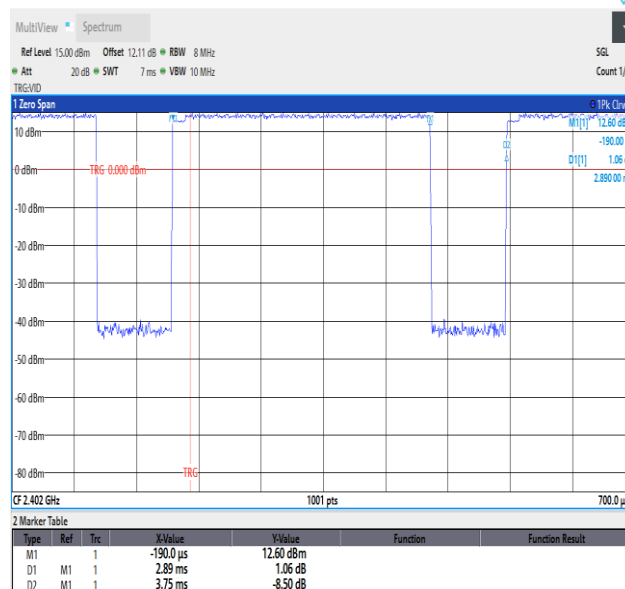

NTNV-3DH5-Ant1-2402

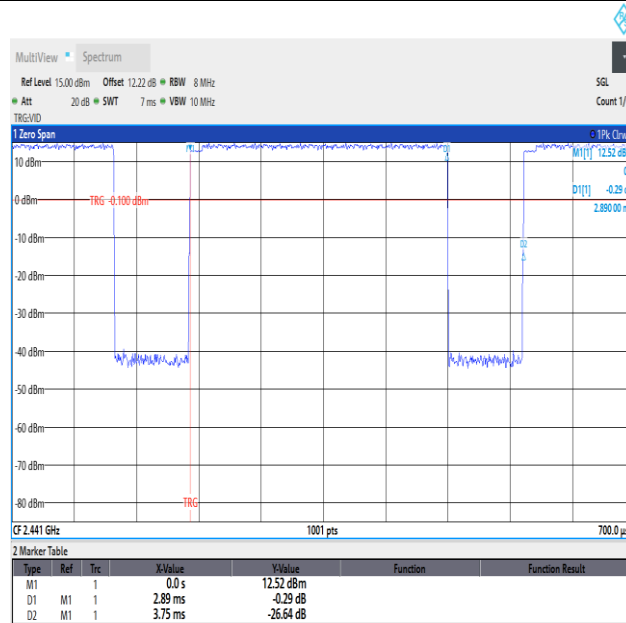

NTNV-3DH5-Ant1-2441

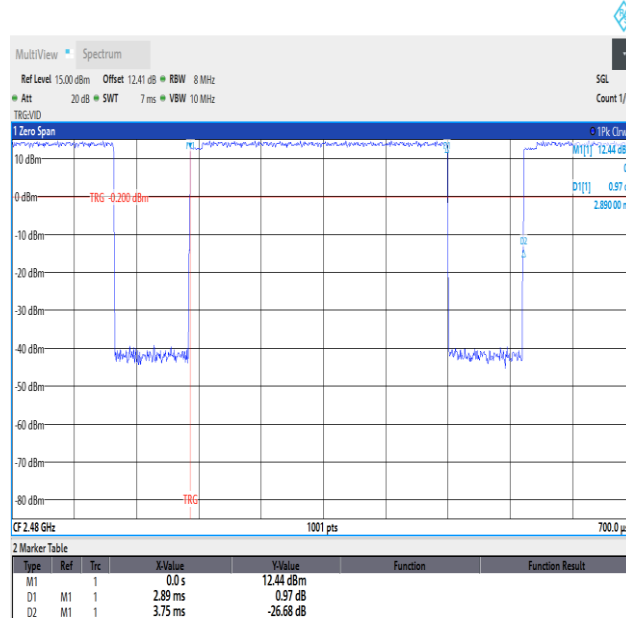

NTNV-3DH5-Ant1-2480