

FCC Test Report (Part 24 – GPRS, EDGE, LTE B2/B25)

Report No.: RFBHKI-WTW-P21120244-1

FCC ID: NKRUMC-MT2731CBN

Test Model: UMC-MT2731CBN

Received Date: Nov. 01, 2021

Test Date: Jan. 17 ~ Feb. 24, 2022

Issued Date: Jun. 09, 2022

Applicant: Wistron NeWeb Corporation

Address: 20 Park Ave. II, Hsinchu Science Park, Hsinchu 308, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, TAIWAN

FCC Registration / 788550 / TW0003
Designation Number:



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Test Site and Instruments	7
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test	11
3.2.1 Description of Support Units	11
3.3 Test Mode Applicability and Tested Channel Detail	12
3.4 EUT Operating Conditions	19
3.5 General Description of Applied Standards and References	19
4 Test Types and Results	20
4.1 Output Power Measurement	20
4.1.1 Limits of Output Power Measurement	20
4.1.2 Test Procedures	20
4.1.3 Test Setup	20
4.1.4 Test Results	21
4.2 Modulation Characteristics Measurement	47
4.2.1 Limits of Modulation Characteristics	47
4.2.2 Test Procedure	47
4.2.3 Test Setup	47
4.2.4 Test Results	48
4.3 Frequency Stability Measurement	51
4.3.1 Limits of Frequency Stability Measurement	51
4.3.2 Test Procedure	51
4.3.3 Conducted Setup	51
4.3.4 Test Results	52
4.4 Occupied Bandwidth Measurement	66
4.4.1 Test Procedure	66
4.4.2 Test Setup	66
4.4.3 Test Result	67
4.5 Band Edge Measurement	80
4.5.1 Limits of Band Edge Measurement	80
4.5.2 Test Setup	80
4.5.3 Test Procedures	80
4.5.4 Test Results	81
4.6 Peak to Average Ratio	94
4.6.1 Limits of Peak to Average Ratio Measurement	94
4.6.2 Test Setup	94
4.6.3 Test Procedures	94
4.6.4 Test Results	95
4.7 Conducted Spurious Emissions	108
4.7.1 Limits of Conducted Spurious Emissions Measurement	108
4.7.2 Test Setup	108
4.7.3 Test Procedure	108
4.7.4 Test Results	109
4.8 Radiated Emission Measurement	123
4.8.1 Limits of Radiated Emission Measurement	123
4.8.2 Test Procedure	123
4.8.3 Deviation from Test Standard	123
4.8.4 Test Setup	124
4.8.5 Test Results	125

5	Pictures of Test Arrangements	152
	Appendix – Information of the Testing Laboratories	153

Release Control Record

Issue No.	Description	Date Issued
RFBHKI-WTW-P21120244-1	Original release	Jun. 09, 2022

1 Certificate of Conformity

Product: Cellular module

Brand: WNC

Test Model: UMC-MT2731CBN

Sample Status: Engineering sample

Applicant: Wistron NeWeb Corporation

Test Date: Jan. 17 ~ Feb. 24, 2022

Standards: FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Celine Chou , **Date:** Jun. 09, 2022
Celine Chou / Senior Specialist

Approved by : Jeremy Lin , **Date:** Jun. 09, 2022
Jeremy Lin / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Equivalent Isotropically Radiated Power	Pass	Meet the requirement of limit.
2.1046 24.232 (d)	Peak To Average Ratio	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement
2.1055 24.235	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
24.238	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -28.48dB at 77.53MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	2.93 dB
	200MHz ~ 1000MHz	2.95 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 03, 2021	Dec. 02, 2022
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 12, 2021	Apr. 11, 2022
Broadband Horn Antenna SCHWARZBECK	BBHA 9170	148	Nov. 14, 2021	Nov. 13, 2022
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Nov. 14, 2021	Nov. 13, 2022
BILOG Antenna SCHWARZBECK	VULB 9168	9168-472	Oct. 28, 2021	Oct. 27, 2022
Fixed Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	Apr. 13, 2021	Apr. 12, 2022
Loop Antenna TESEQ	HLA 6121	45745	Jul. 21, 2021	Jul. 20, 2022
Preamplifier EMCI	EMC001340	980201	Sep. 15, 2021	Sep. 14, 2022
Preamplifier EMCI	EMC 012645	980115	Oct. 05, 2021	Oct. 04, 2022
Preamplifier EMCI	EMC 184045	980116	Oct. 05, 2021	Oct. 04, 2022
Preamplifier EMCI	EMC 330H	980112	Oct. 05, 2021	Oct. 04, 2022
RF Coaxial Cable EMCI	EMC104-SM-SM-800 0	171005	Oct. 05, 2021	Oct. 04, 2022
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1000 (140807)	Oct. 05, 2021	Oct. 04, 2022
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 05, 2021	Oct. 04, 2022
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Temperature & Humidity Chamber TERCHY	HRM-120RF	931022	Jan. 03, 2022	Jan. 02, 2023
True RMS Clamp Meter Fluke	325	31130711WS	Jun. 02, 2021	Jun. 01, 2022
DC power supply Keysight	U8002A	MY56330015	NA	NA
Radio Communication Analyzer Anritsu	MT8821C	6272278310	Jun. 23, 2021	Jun. 22, 2022
Universal Radio Communication Tester R&S	CMU200	101095	Nov. 18, 2021	Nov. 17, 2022

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 10.

3 General Information

3.1 General Description of EUT

Product	Cellular module	
Brand	WNC	
Test Model	UMC-MT2731CBN	
Sample Status	Engineering sample	
Power Supply Rating	4.0Vdc	
Modulation Type	GPRS: GMSK EDGE: 8PSK LTE: QPSK, 16QAM, 64QAM	
Operating Frequency	GPRS, EDGE	1850.2MHz ~ 1909.8MHz
	LTE Band 2 (Channel Bandwidth 1.4MHz)	1850.7MHz ~ 1909.3MHz
	LTE Band 2 (Channel Bandwidth 3MHz)	1851.5MHz ~ 1908.5MHz
	LTE Band 2 (Channel Bandwidth 5MHz)	1852.5MHz ~ 1907.5MHz
	LTE Band 2 (Channel Bandwidth 10MHz)	1855.0MHz ~ 1905.0MHz
	LTE Band 2 (Channel Bandwidth 15MHz)	1857.5MHz ~ 1902.5MHz
	LTE Band 2 (Channel Bandwidth 20MHz)	1860.0MHz ~ 1900.0MHz
	LTE Band 25 (Channel Bandwidth 1.4MHz)	1850.7MHz ~ 1914.3MHz
	LTE Band 25 (Channel Bandwidth 3MHz)	1851.5MHz ~ 1913.5MHz
	LTE Band 25 (Channel Bandwidth 5MHz)	1852.5MHz ~ 1912.5MHz
	LTE Band 25 (Channel Bandwidth 10MHz)	1855.0MHz ~ 1910.0MHz
	LTE Band 25 (Channel Bandwidth 15MHz)	1857.5MHz ~ 1907.5MHz
	LTE Band 25 (Channel Bandwidth 20MHz)	1860.0MHz ~ 1905.0MHz

Max. EIRP Power	GPRS	1099.006mW (30.41dBm)		
	EDGE	866.962mW (29.38dBm)		
		QPSK	16QAM	64QAM
	LTE Band 2 (Channel Bandwidth 1.4MHz)	287.078mW (24.58dBm)	220.800mW (23.44dBm)	186.209mW (22.70dBm)
	LTE Band 2 (Channel Bandwidth 3MHz)	281.838mW (24.50dBm)	222.331mW (23.47dBm)	182.810mW (22.62dBm)
	LTE Band 2 (Channel Bandwidth 5MHz)	293.765mW (24.68dBm)	229.615mW (23.61dBm)	181.134mW (22.58dBm)
	LTE Band 2 (Channel Bandwidth 10MHz)	304.789mW (24.84dBm)	232.274mW (23.66dBm)	187.932mW (22.74dBm)
	LTE Band 2 (Channel Bandwidth 15MHz)	293.089mW (24.67dBm)	254.097mW (24.05dBm)	187.932mW (22.74dBm)
	LTE Band 2 (Channel Bandwidth 20MHz)	297.852mW (24.74dBm)	259.418mW (24.14dBm)	187.932mW (22.74dBm)
	LTE Band 25 (Channel Bandwidth 1.4MHz)	295.801mW (24.71dBm)	244.906mW (23.89dBm)	200.909mW (23.03dBm)
	LTE Band 25 (Channel Bandwidth 3MHz)	286.418mW (24.57dBm)	250.035mW (23.98dBm)	205.589mW (23.13dBm)
	LTE Band 25 (Channel Bandwidth 5MHz)	278.612mW (24.45dBm)	236.592mW (23.74dBm)	199.986mW (23.01dBm)
	LTE Band 25 (Channel Bandwidth 10MHz)	295.121mW (24.70dBm)	235.505mW (23.72dBm)	204.174mW (23.10dBm)
	LTE Band 25 (Channel Bandwidth 15MHz)	296.483mW (24.72dBm)	250.035mW (23.98dBm)	194.089mW (22.88dBm)
	LTE Band 25 (Channel Bandwidth 20MHz)	297.167mW (24.73dBm)	242.661mW (23.85dBm)	205.589mW (23.13dBm)
Emission Designator	GPRS	246KGXW		
	EDGE	248KG7W		
		QPSK	16QAM	64QAM
	LTE Band 2 (Channel Bandwidth 1.4MHz)	1M09G7D	1M09D7W	1M09D7W
	LTE Band 2 (Channel Bandwidth 3MHz)	2M69G7D	2M69D7W	2M69D7W
	LTE Band 2 (Channel Bandwidth 5MHz)	4M49G7D	4M49D7W	4M50D7W
	LTE Band 2 (Channel Bandwidth 10MHz)	8M98G7D	8M98D7W	8M98D7W
	LTE Band 2 (Channel Bandwidth 15MHz)	13M5G7D	13M5D7W	13M5D7W
	LTE Band 2 (Channel Bandwidth 20MHz)	18M0G7D	18M0D7W	18M0D7W
	LTE Band 25 (Channel Bandwidth 1.4MHz)	1M09G7D	1M09D7W	1M09D7W
	LTE Band 25 (Channel Bandwidth 3MHz)	2M69G7D	2M69D7W	2M69D7W
	LTE Band 25 (Channel Bandwidth 5MHz)	4M50G7D	4M50D7W	4M50D7W
	LTE Band 25 (Channel Bandwidth 10MHz)	8M99G7D	8M98D7W	8M98D7W
	LTE Band 25 (Channel Bandwidth 15MHz)	13M5G7D	13M5D7W	13M5D7W
	LTE Band 25 (Channel Bandwidth 20MHz)	18M0G7D	18M0D7W	18M0D7W


Antenna Type	Refer to note
Antenna Connector	Refer to note
Accessory Device	NA
Cable Supplied	NA

Note: The antenna information is listed as below. (For support unit only)

Type	Connector	Gain (dBi)											
		GSM 850	GSM 1900	LTE B2	LTE B4	LTE B5	LTE B7	LTE B12	LTE B14	LTE B17	LTE B25	LTE B26	LTE B66
Dipole	SMA	1.82	1.80	1.80	1.57	1.82	2.15	2.02	2.02	2.02	1.80	1.82	1.57

* The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Configuration of System under Test

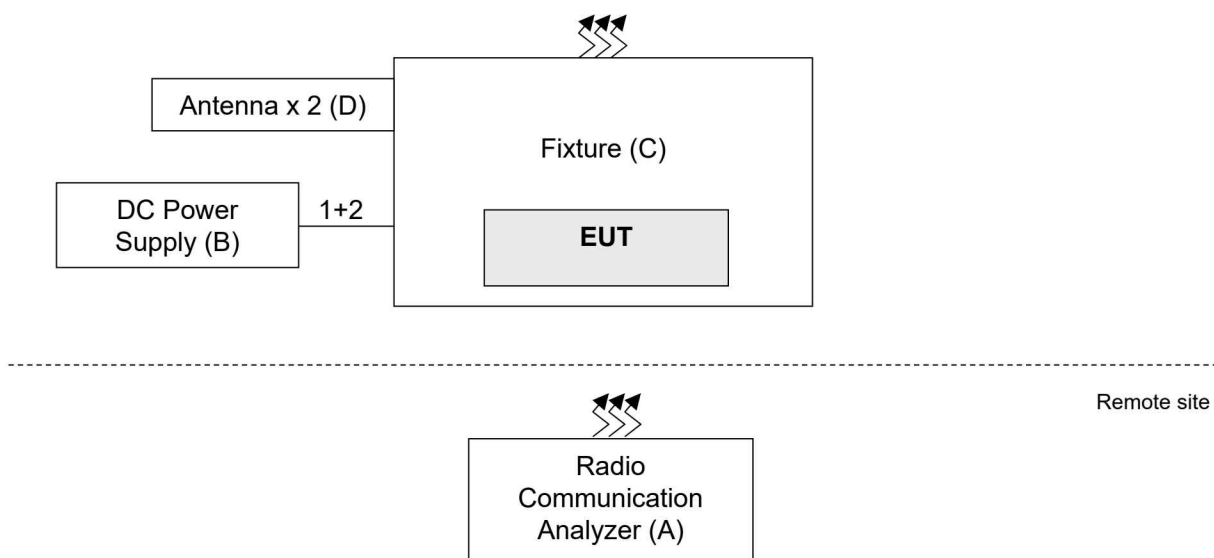

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Radio Communication Analyzer	Anritsu	MT8821C	6261806803	NA	For LTE
		R&S	CMU200	101095	NA	For GPRS, EDGE
B.	DC Power Supply	JIN YIH Technology	SP3051	SP30512050388	NA	-
C.	Fixture	NA	NA	NA	NA	Provided by manufacturer
D.	Antenna x 2	WNC	RF21S00802A	NA	NA	Provided by manufacturer

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Power Cable	1	1.8	N	0	-
2.	DC Cable	1	0.12	N	0	-

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	Radiated Emission
GPRS, EDGE	Z-plane
LTE Band 2	Z-plane
LTE Band 25	Z-plane

GPRS, EDGE Mode

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Modulation
-	EIRP	512 to 810	512 (1850.2MHz), 661 (1880.0MHz), 810 (1909.8MHz)	GPRS, EDGE
-	Modulation Characteristics	512 to 810	661 (1880.0MHz)	GPRS, EDGE
-	Frequency Stability	512 to 810	512 (1850.2MHz), 810 (1909.8MHz)	GPRS, EDGE
-	Occupied Bandwidth	512 to 810	512 (1850.2MHz), 661 (1880.0MHz), 810 (1909.8MHz)	GPRS, EDGE
-	Band Edge	512 to 810	512(1850.2MHz), 810(1909.8MHz)	GPRS, EDGE
-	Peak To Average Ratio	512 to 810	512 (1850.2MHz), 661 (1880.0MHz), 810 (1909.8MHz)	GPRS, EDGE
-	Conducted Emission	512 to 810	512 (1850.2MHz), 661 (1880.0MHz), 810 (1909.8MHz)	GPRS, EDGE
-	Radiated Emission	512 to 810	512 (1850.2MHz), 661 (1880.0MHz), 810 (1909.8MHz)	GPRS

Note: For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.

LTE Band 2

EUT Configure Mode	Test item	Available channel	Tested Channel	Channel Bandwidth	Modulation	RB #
-	EIRP	18607 to 19193	18607 (1850.7MHz), 18900 (1880.0MHz), 19193 (1909.3MHz)	1.4MHz	QPSK / 16QAM / 64QAM	1 Half Full
		18615 to 19185	18615 (1851.5MHz), 18900 (1880.0MHz), 19185 (1908.5MHz)	3MHz	QPSK / 16QAM / 64QAM	1 Half Full
		18625 to 19175	18625 (1852.5MHz), 18900 (1880.0MHz), 19175 (1907.5MHz)	5MHz	QPSK / 16QAM / 64QAM	1 Half Full
		18650 to 19150	18650 (1855.0MHz), 18900 (1880.0MHz), 19150 (1905.0MHz)	10MHz	QPSK / 16QAM / 64QAM	1 Half Full
		18675 to 19125	18675 (1857.5MHz), 18900 (1880.0MHz), 19125 (1902.5MHz)	15MHz	QPSK / 16QAM / 64QAM	1 Half Full
		18700 to 19100	18700 (1860.0MHz), 18900 (1880.0MHz), 19100 (1900.0MHz)	20MHz	QPSK / 16QAM / 64QAM	1 Half Full
-	Modulation Characteristics	18700 to 19100	18900 (1880.0MHz)	20MHz	QPSK / 16QAM / 64QAM	Full
-	Frequency Stability	18607 to 19193	18607 (1850.7MHz), 19193 (1909.3MHz)	1.4MHz	QPSK	Full
		18615 to 19185	18615 (1851.5MHz), 19185 (1908.5MHz)	3MHz	QPSK	Full
		18625 to 19175	18625 (1852.5MHz), 19175 (1907.5MHz)	5MHz	QPSK	Full
		18650 to 19150	18650 (1855.0MHz), 19150 (1905.0MHz)	10MHz	QPSK	Full
		18675 to 19125	18675 (1857.5MHz), 19125 (1902.5MHz)	15MHz	QPSK	Full
		18700 to 19100	18700 (1860.0MHz), 19100 (1900.0MHz)	20MHz	QPSK	Full
-	Occupied Bandwidth	18607 to 19193	18607 (1850.7MHz), 18900 (1880.0MHz), 19193 (1909.3MHz)	1.4MHz	QPSK / 16QAM / 64QAM	Full
		18615 to 19185	18615 (1851.5MHz), 18900 (1880.0MHz), 19185 (1908.5MHz)	3MHz	QPSK / 16QAM / 64QAM	Full
		18625 to 19175	18625 (1852.5MHz), 18900 (1880.0MHz), 19175 (1907.5MHz)	5MHz	QPSK / 16QAM / 64QAM	Full
		18650 to 19150	18650 (1855.0MHz), 18900 (1880.0MHz), 19150 (1905.0MHz)	10MHz	QPSK / 16QAM / 64QAM	Full
		18675 to 19125	18675 (1857.5MHz), 18900 (1880.0MHz), 19125 (1902.5MHz)	15MHz	QPSK / 16QAM / 64QAM	Full
		18700 to 19100	18700 (1860.0MHz), 18900 (1880.0MHz), 19100 (1900.0MHz)	20MHz	QPSK / 16QAM / 64QAM	Full

EUT Configure Mode	Test item	Available channel	Tested Channel	Channel Bandwidth	Modulation	RB #
-	Band Edge	18607 to 19193	18607 (1850.7MHz), 19193 (1909.3MHz)	1.4MHz	QPSK	1 Half Full
		18615 to 19185	18615 (1851.5MHz), 19185 (1908.5MHz)	3MHz	QPSK	1 Half Full
		18625 to 19175	18625 (1852.5MHz), 19175 (1907.5MHz)	5MHz	QPSK	1 Half Full
		18650 to 19150	18650 (1855.0MHz), 19150 (1905.0MHz)	10MHz	QPSK	1 Half Full
		18675 to 19125	18675 (1857.5MHz), 19125 (1902.5MHz)	15MHz	QPSK	1 Half Full
		18700 to 19100	18700 (1860.0MHz), 19100 (1900.0MHz)	20MHz	QPSK	1 Half Full
-	Peak to Average Ratio	18607 to 19193	18607 (1850.7MHz), 18900 (1880.0MHz), 19193 (1909.3MHz)	1.4MHz	QPSK / 16QAM / 64QAM	1
		18615 to 19185	18615 (1851.5MHz), 18900 (1880.0MHz), 19185 (1908.5MHz)	3MHz	QPSK / 16QAM / 64QAM	1
		18625 to 19175	18625 (1852.5MHz), 18900 (1880.0MHz), 19175 (1907.5MHz)	5MHz	QPSK / 16QAM / 64QAM	1
		18650 to 19150	18650 (1855.0MHz), 18900 (1880.0MHz), 19150 (1905.0MHz)	10MHz	QPSK / 16QAM / 64QAM	1
		18675 to 19125	18675 (1857.5MHz), 18900 (1880.0MHz), 19125 (1902.5MHz)	15MHz	QPSK / 16QAM / 64QAM	1
		18700 to 19100	18700 (1860.0MHz), 18900 (1880.0MHz), 19100 (1900.0MHz)	20MHz	QPSK / 16QAM / 64QAM	1

EUT Configure Mode	Test item	Available channel	Tested Channel	Channel Bandwidth	Modulation	RB #
-	Conducted Emission	18607 to 19193	18607 (1850.7MHz), 18900 (1880.0MHz), 19193 (1909.3MHz)	1.4MHz	QPSK	1
		18615 to 19185	18615 (1851.5MHz), 18900 (1880.0MHz), 19185 (1908.5MHz)	3MHz	QPSK	1
		18625 to 19175	18625 (1852.5MHz), 18900 (1880.0MHz), 19175 (1907.5MHz)	5MHz	QPSK	1
		18650 to 19150	18650 (1855.0MHz), 18900 (1880.0MHz), 19150 (1905.0MHz)	10MHz	QPSK	1
		18675 to 19125	18675 (1857.5MHz), 18900 (1880.0MHz), 19125 (1902.5MHz)	15MHz	QPSK	1
		18700 to 19100	18700 (1860.0MHz), 18900 (1880.0MHz), 19100 (1900.0MHz)	20MHz	QPSK	1
-	Radiated Emission	18607 to 19193	18607 (1850.7MHz), 18900 (1880.0MHz), 19193 (1909.3MHz)	1.4MHz	QPSK	1
		18625 to 19175	18625 (1852.5MHz), 18900 (1880.0MHz), 19175 (1907.5MHz)	5MHz	QPSK	1
		18700 to 19100	18700 (1860.0MHz), 18900 (1880.0MHz), 19100 (1900.0MHz)	20MHz	QPSK	1

Note:

1. For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.
2. For radiated emission above 1GHz, according to 3GPP 36.521-1 Section 6.6.3.1.4.1, choose the lowest, 5MHz & highest channel bandwidth for final test.
3. The output power for QPSK, 16QAM and 64QAM, measured value of QPSK is higher than 16QAM, and 64QAM mode. Therefore, only Modulation characteristics, occupied bandwidth and Peak to average ratio items had been tested under QPSK, 16QAM and 64QAM modes, the other test items were performed under worse mode according to the maximum output power.

LTE Band 25

EUT Configure Mode	Test item	Available channel	Tested Channel	Channel Bandwidth	Modulation	RB #
-	EIRP	26047 to 26683	26047 (1850.7MHz), 26365 (1882.5MHz), 26683 (1914.3MHz)	1.4MHz	QPSK / 16QAM / 64QAM	1 Half Full
		26055 to 26675	26055 (1851.5MHz), 26365 (1882.5MHz), 26675 (1913.5MHz)	3MHz	QPSK / 16QAM / 64QAM	1 Half Full
		26065 to 26665	26065 (1852.5MHz), 26365 (1882.5MHz), 26665 (1912.5MHz)	5MHz	QPSK / 16QAM / 64QAM	1 Half Full
		26090 to 26640	26090 (1855.0MHz), 26365 (1882.5MHz), 26640 (1910.0MHz)	10MHz	QPSK / 16QAM / 64QAM	1 Half Full
		26115 to 26615	26115 (1857.5MHz), 26365 (1882.5MHz), 26615 (1907.5MHz)	15MHz	QPSK / 16QAM / 64QAM	1 Half Full
		26140 to 26590	26140 (1860.0MHz), 26365 (1882.5MHz), 26590 (1905.0MHz)	20MHz	QPSK / 16QAM / 64QAM	1 Half Full
-	Modulation Characteristics	26140 to 26590	26365 (1882.5MHz)	20MHz	QPSK / 16QAM / 64QAM	Full
-	Frequency Stability	26047 to 26683	26047 (1850.7MHz), 26683 (1914.3MHz)	1.4MHz	QPSK	Full
		26055 to 26675	26055 (1851.5MHz), 26675 (1913.5MHz)	3MHz	QPSK	Full
		26065 to 26665	26065 (1852.5MHz), 26665 (1912.5MHz)	5MHz	QPSK	Full
		26090 to 26640	26090 (1855.0MHz), 26640 (1910.0MHz)	10MHz	QPSK	Full
		26115 to 26615	26115 (1857.5MHz), 26615 (1907.5MHz)	15MHz	QPSK	Full
		26140 to 26590	26140 (1860.0MHz), 26590 (1905.0MHz)	20MHz	QPSK	Full
-	Occupied Bandwidth	26047 to 26683	26047 (1850.7MHz), 26365 (1882.5MHz), 26683 (1914.3MHz)	1.4MHz	QPSK / 16QAM / 64QAM	Full
		26055 to 26675	26055 (1851.5MHz), 26365 (1882.5MHz), 26675 (1913.5MHz)	3MHz	QPSK / 16QAM / 64QAM	Full
		26065 to 26665	26065 (1852.5MHz), 26365 (1882.5MHz), 26665 (1912.5MHz)	5MHz	QPSK / 16QAM / 64QAM	Full
		26090 to 26640	26090 (1855.0MHz), 26365 (1882.5MHz), 26640 (1910.0MHz)	10MHz	QPSK / 16QAM / 64QAM	Full
		26115 to 26615	26115 (1857.5MHz), 26365 (1882.5MHz), 26615 (1907.5MHz)	15MHz	QPSK / 16QAM / 64QAM	Full
		26140 to 26590	26140 (1860.0MHz), 26365 (1882.5MHz), 26590 (1905.0MHz)	20MHz	QPSK / 16QAM / 64QAM	Full

EUT Configure Mode	Test item	Available channel	Tested Channel	Channel Bandwidth	Modulation	RB #
-	Band Edge	26047 to 26683	26047 (1850.7MHz), 26683 (1914.3MHz)	1.4MHz	QPSK	1 Half Full
		26055 to 26675	26055 (1851.5MHz), 26675 (1913.5MHz)	3MHz	QPSK	1 Half Full
		26065 to 26665	26065 (1852.5MHz), 26665 (1912.5MHz)	5MHz	QPSK	1 Half Full
		26090 to 26640	26090 (1855.0MHz), 26640 (1910.0MHz)	10MHz	QPSK	1 Half Full
		26115 to 26615	26115 (1857.5MHz), 26615 (1907.5MHz)	15MHz	QPSK	1 Half Full
		26140 to 26590	26140 (1860.0MHz), 26590 (1905.0MHz)	20MHz	QPSK	1 Half Full
-	Peak to Average Ratio	26047 to 26683	26047 (1850.7MHz), 26365 (1882.5MHz), 26683 (1914.3MHz)	1.4MHz	QPSK / 16QAM / 64QAM	1
		26055 to 26675	26055 (1851.5MHz), 26365 (1882.5MHz), 26675 (1913.5MHz)	3MHz	QPSK / 16QAM / 64QAM	1
		26065 to 26665	26065 (1852.5MHz), 26365 (1882.5MHz), 26665 (1912.5MHz)	5MHz	QPSK / 16QAM / 64QAM	1
		26090 to 26640	26090 (1855.0MHz), 26365 (1882.5MHz), 26640 (1910.0MHz)	10MHz	QPSK / 16QAM / 64QAM	1
		26115 to 26615	26115 (1857.5MHz), 26365 (1882.5MHz), 26615 (1907.5MHz)	15MHz	QPSK / 16QAM / 64QAM	1
		26140 to 26590	26140 (1860.0MHz), 26365 (1882.5MHz), 26590 (1905.0MHz)	20MHz	QPSK / 16QAM / 64QAM	1

EUT Configure Mode	Test item	Available channel	Tested Channel	Channel Bandwidth	Modulation	RB #
-	Conducted Emission	26047 to 26683	26047 (1850.7MHz), 26365 (1882.5MHz), 26683 (1914.3MHz)	1.4MHz	QPSK	1
		26055 to 26675	26055 (1851.5MHz), 26365 (1882.5MHz), 26675 (1913.5MHz)	3MHz	QPSK	1
		26065 to 26665	26065 (1852.5MHz), 26365 (1882.5MHz), 26665 (1912.5MHz)	5MHz	QPSK	1
		26090 to 26640	26090 (1855.0MHz), 26365 (1882.5MHz), 26640 (1910.0MHz)	10MHz	QPSK	1
		26115 to 26615	26115 (1857.5MHz), 26365 (1882.5MHz), 26615 (1907.5MHz)	15MHz	QPSK	1
		26140 to 26590	26140 (1860.0MHz), 26365 (1882.5MHz), 26590 (1905.0MHz)	20MHz	QPSK	1
-	Radiated Emission	26047 to 26683	26047 (1850.7MHz), 26365 (1882.5MHz), 26683 (1914.3MHz)	1.4MHz	QPSK	1
		26065 to 26665	26065 (1852.5MHz), 26365 (1882.5MHz), 26665 (1912.5MHz)	5MHz	QPSK	1
		26140 to 26590	26140 (1860.0MHz), 26365 (1882.5MHz), 26590 (1905.0MHz)	20MHz	QPSK	1

Note:

1. For radiated emission below 1GHz, select the worst radiated emission channel (above 1GHz) for final testing.
2. For radiated emission above 1GHz, according to 3GPP 36.521-1 Section 6.6.3.1.4.1, choose the lowest, 5MHz & highest channel bandwidth for final test.
3. The output power for QPSK, 16QAM and 64QAM, measured value of QPSK is higher than 16QAM, and 64QAM mode. Therefore, only Modulation characteristics, occupied bandwidth and Peak to average ratio items had been tested under QPSK, 16QAM and 64QAM modes, the other test items were performed under worse mode according to the maximum output power.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	25deg. C, 60%RH	4.0Vdc	James Yang
Modulation Characteristics	25deg. C, 60%RH	4.0Vdc	James Yang
Frequency Stability	25deg. C, 60%RH	4.0Vdc	James Yang
Occupied Bandwidth	25deg. C, 60%RH	4.0Vdc	James Yang
Band Edge	25deg. C, 60%RH	4.0Vdc	James Yang
Peak To Average Ratio	25deg. C, 60%RH	4.0Vdc	James Yang
Conducted Emission	25deg. C, 60%RH	4.0Vdc	James Yang
Radiated Emission	22deg. C, 64%RH	4.0Vdc	Vincent Chen

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

All test items have been performed and recorded as per the above standards.