



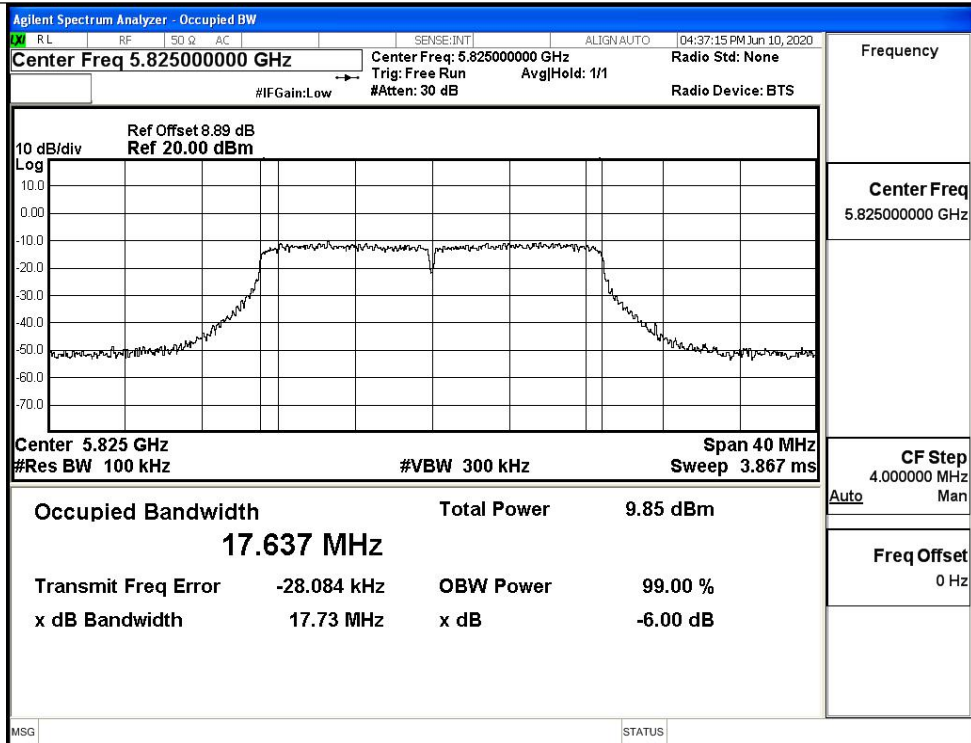


IEEE 802.11n20 / Channel 165 / 5825MHz


## 26dB Bandwidth

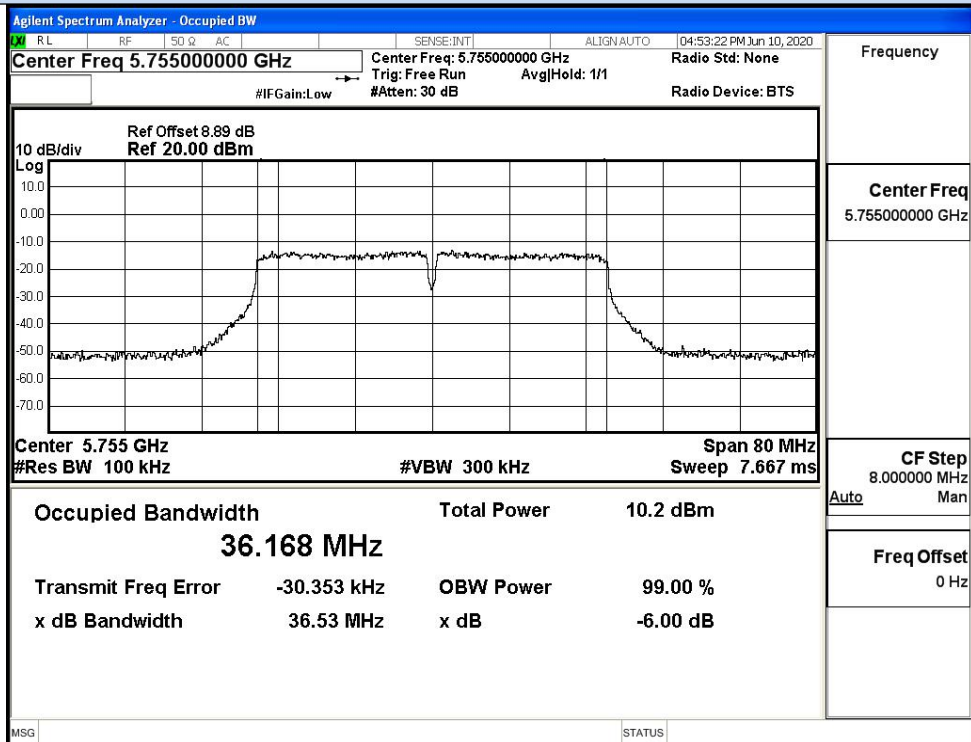


## IEEE 802.11n40 / Channel 151 / 5755MHz

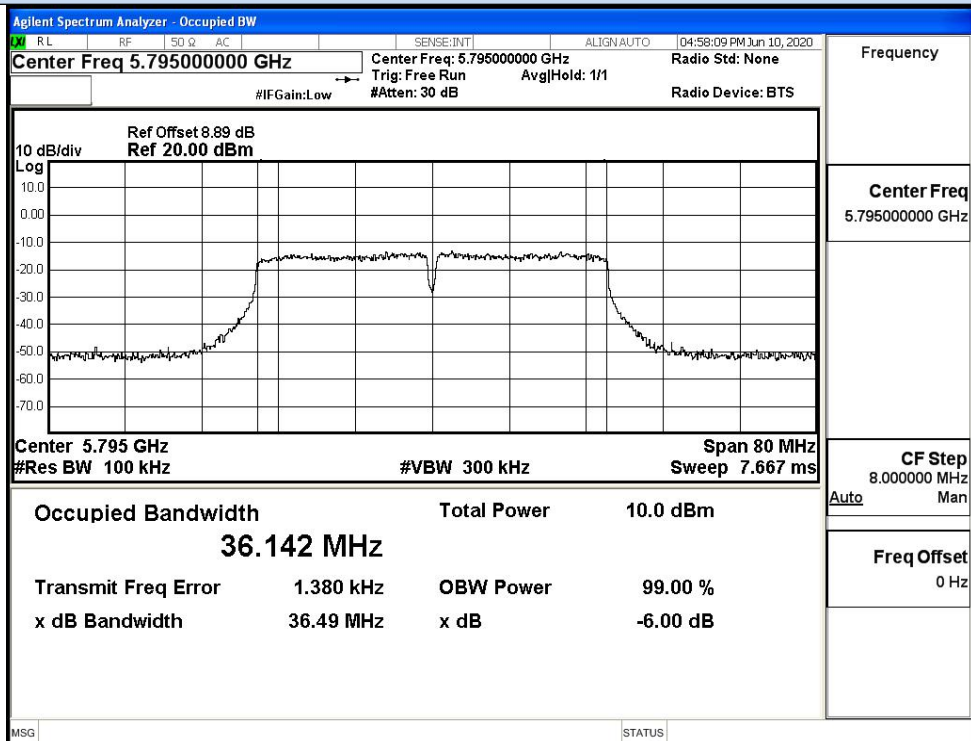


## IEEE 802.11n40 / Channel 159 / 5795MHz

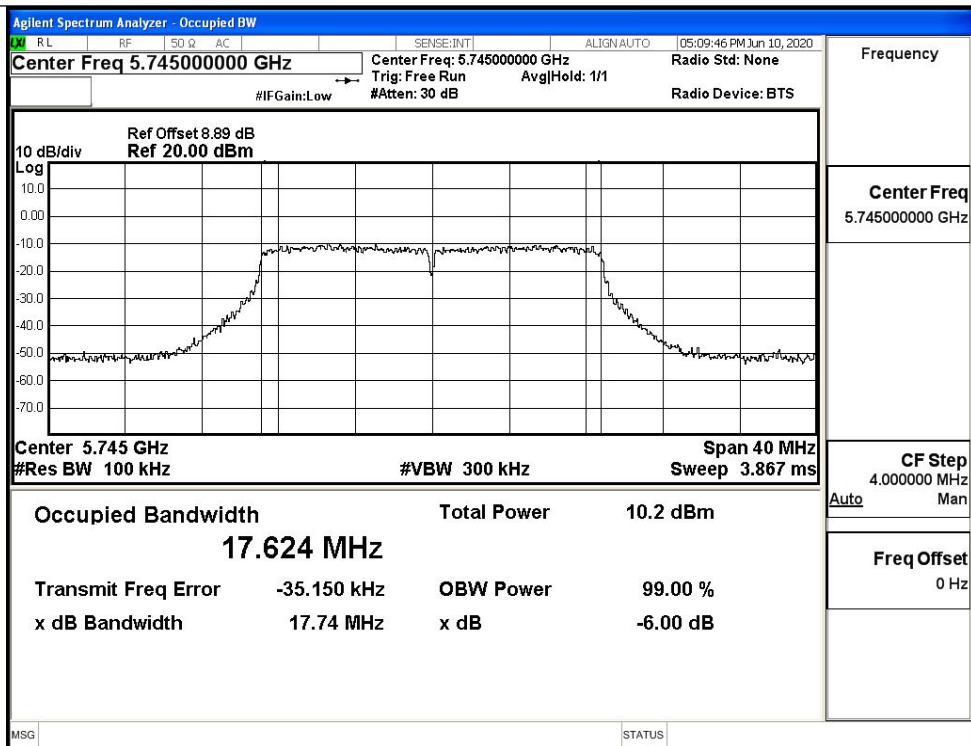


IEEE 802.11ac20 / Channel 149 / 5745MHz

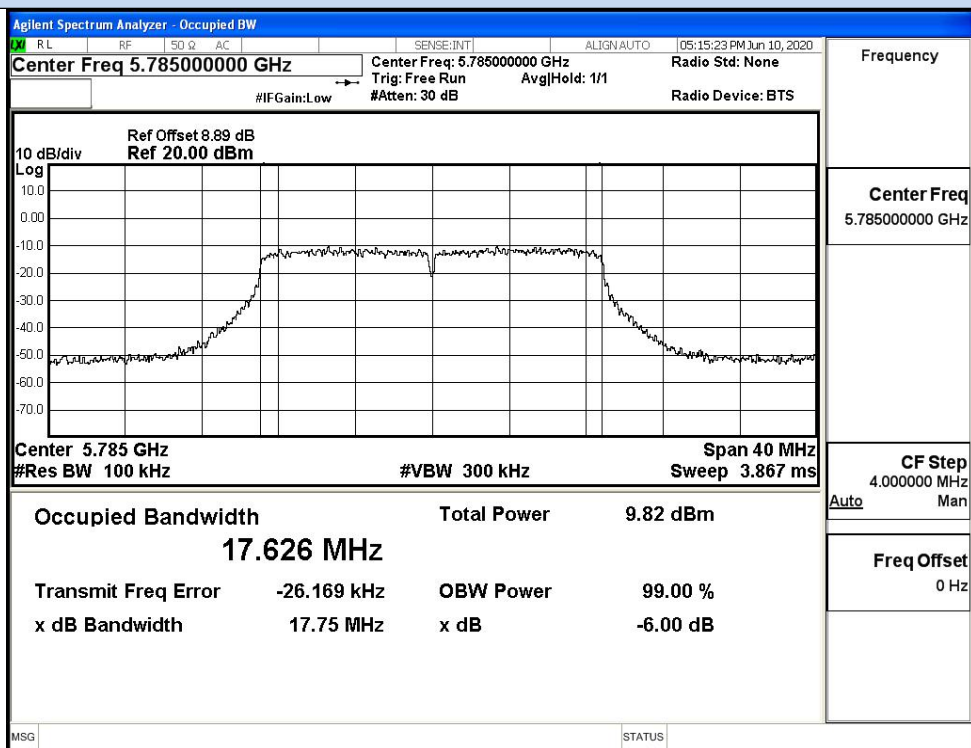


IEEE 802.11ac20 / Channel 157/ 5785MHz

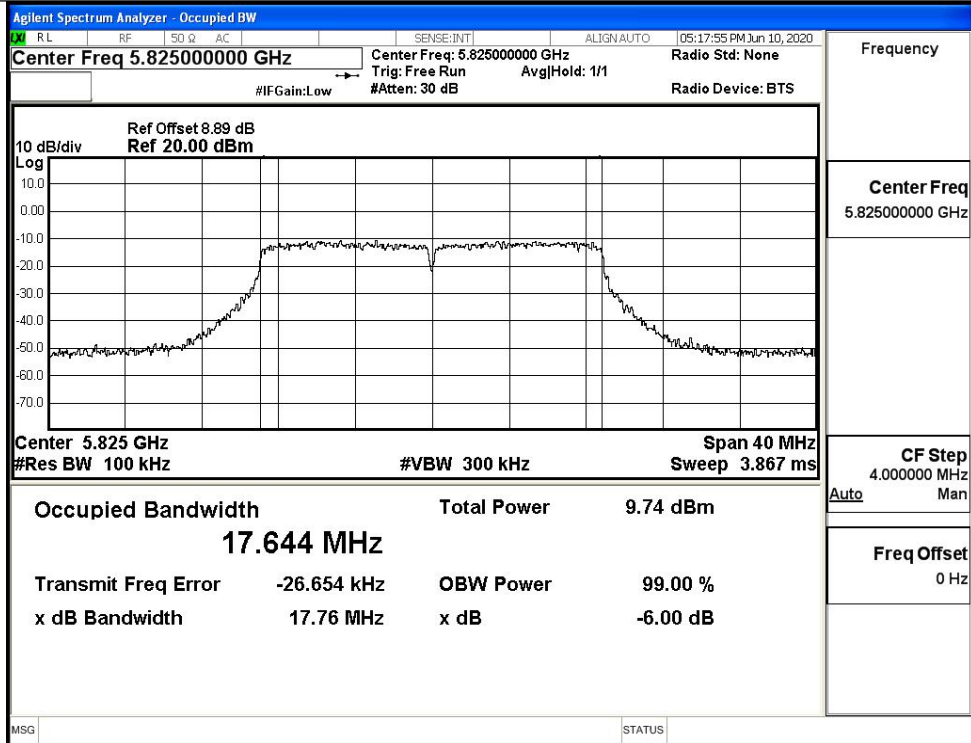


IEEE 802.11ac20 / Channel 165 / 5825MHz

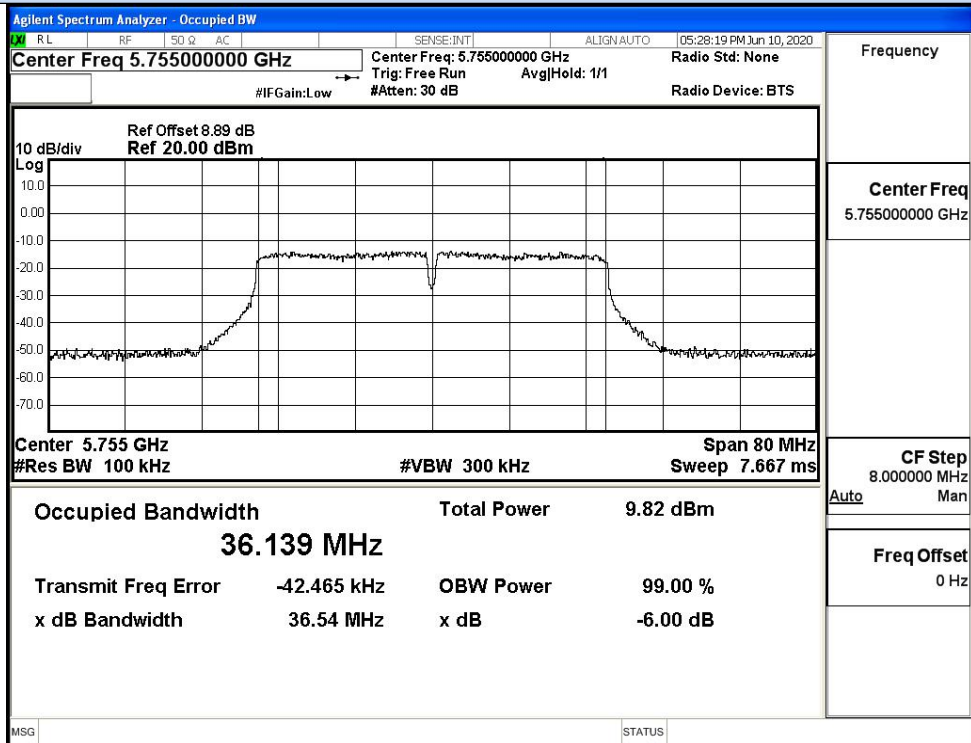

IEEE 802.11ac40 / Channel 151 / 5755MHz

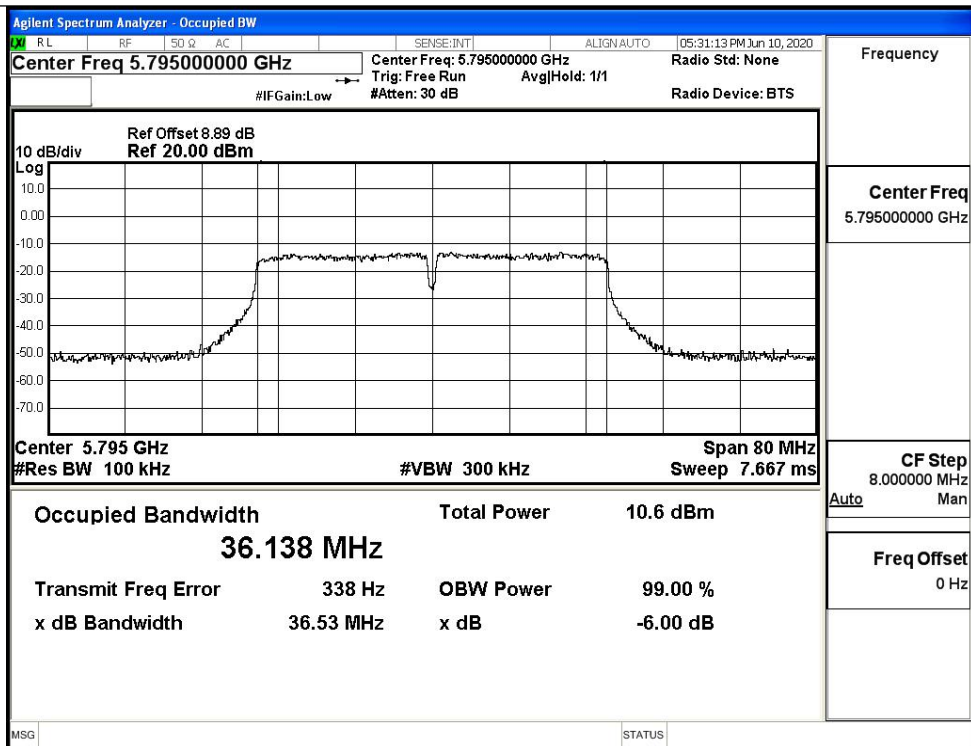

IEEE 802.11ac40 / Channel 159 / 5795MHz

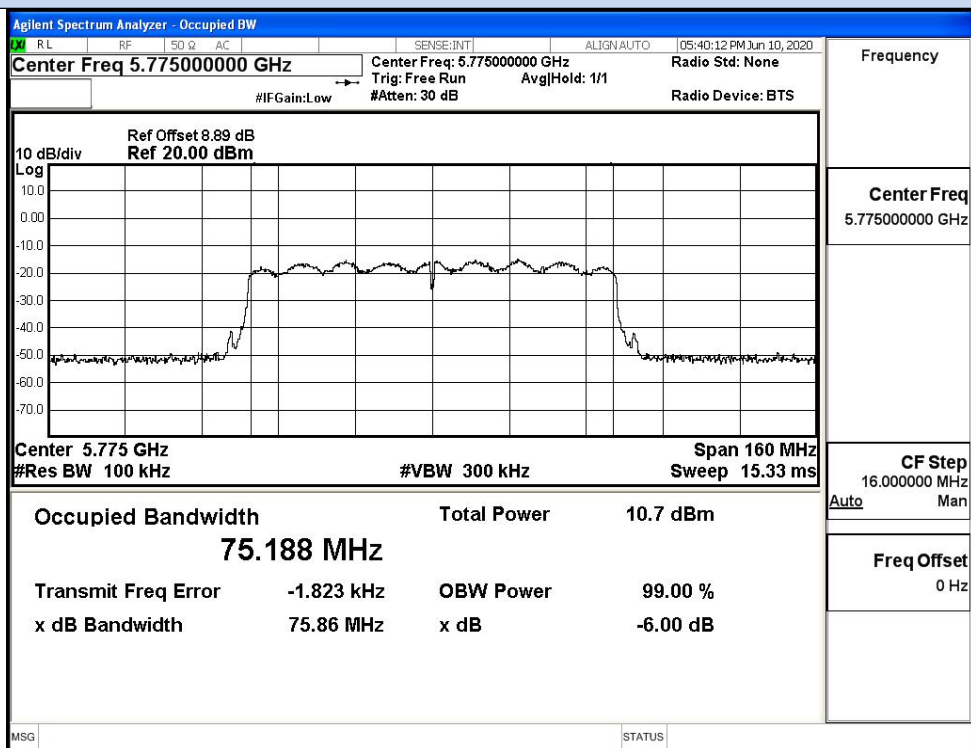

IEEE 802.11ac80 / Channel 155 / 5775MHz

## E.5 Undesirable Emissions Measurement


### ANT 0

| Test Mode  | Channel | Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | EIRP (dBm/MHz) | Detector | Limit (dBm/MHz) | Verdict |
|------------|---------|-----------------|-----------------------|--------------------|----------------|----------|-----------------|---------|
| 11A        | 149     | 5650.0          | -48.21                | 2.00               | -46.21         | Peak     | -27.0           | Pass    |
|            |         | 5650.0          | -60.50                | 2.00               | -58.50         | Average  | -27.0           | Pass    |
|            |         | 5700.0          | -45.70                | 2.00               | -43.70         | Peak     | 10              | Pass    |
|            |         | 5700.0          | -59.57                | 2.00               | -57.57         | Average  | 10              | Pass    |
|            |         | 5720.0          | -34.33                | 2.00               | -32.33         | Peak     | 15.6            | Pass    |
|            |         | 5720.0          | -57.65                | 2.00               | -55.65         | Average  | 15.6            | Pass    |
|            |         | 5725.0          | -34.13                | 2.00               | -32.13         | Peak     | 27.0            | Pass    |
|            |         | 5725.0          | -54.97                | 2.00               | -52.97         | Average  | 27.0            | Pass    |
|            | 165     | 5850.0          | -43.07                | 2.00               | -41.07         | Peak     | 27.0            | Pass    |
|            |         | 5850.0          | -58.17                | 2.00               | -56.17         | Average  | 27.0            | Pass    |
|            |         | 5855.0          | -44.08                | 2.00               | -42.08         | Peak     | 15.6            | Pass    |
|            |         | 5855.0          | -58.70                | 2.00               | -56.70         | Average  | 15.6            | Pass    |
|            |         | 5875.0          | -47.17                | 2.00               | -45.17         | Peak     | 10              | Pass    |
|            |         | 5875.0          | -59.51                | 2.00               | -57.51         | Average  | 10              | Pass    |
|            |         | 5925.0          | -48.71                | 2.00               | -46.71         | Peak     | -27.0           | Pass    |
|            |         | 5925.0          | -60.33                | 2.00               | -58.33         | Average  | -27.0           | Pass    |
| 11N20 SISO | 149     | 5650.0          | -49.45                | 2.00               | -47.45         | Peak     | -27.0           | Pass    |
|            |         | 5650.0          | -60.46                | 2.00               | -58.46         | Average  | -27.0           | Pass    |
|            |         | 5700.0          | -47.01                | 2.00               | -45.01         | Peak     | 10              | Pass    |
|            |         | 5700.0          | -57.55                | 2.00               | -55.55         | Average  | 10              | Pass    |
|            |         | 5720.0          | -43.83                | 2.00               | -41.83         | Peak     | 15.6            | Pass    |
|            |         | 5720.0          | -59.73                | 2.00               | -57.73         | Average  | 15.6            | Pass    |
|            |         | 5725.0          | -39.64                | 2.00               | -37.64         | Peak     | 27.0            | Pass    |
|            |         | 5725.0          | -55.08                | 2.00               | -53.08         | Average  | 27.0            | Pass    |
|            | 165     | 5850.0          | -46.06                | 2.00               | -44.06         | Peak     | 27.0            | Pass    |
|            |         | 5850.0          | -58.14                | 2.00               | -56.14         | Average  | 27.0            | Pass    |
|            |         | 5855.0          | -46.76                | 2.00               | -44.76         | Peak     | 15.6            | Pass    |
|            |         | 5855.0          | -58.73                | 2.00               | -56.73         | Average  | 15.6            | Pass    |
|            |         | 5875.0          | -47.98                | 2.00               | -45.98         | Peak     | 10              | Pass    |
|            |         | 5875.0          | -59.53                | 2.00               | -57.53         | Average  | 10              | Pass    |
|            |         | 5925.0          | -48.50                | 2.00               | -46.50         | Peak     | -27.0           | Pass    |
|            |         | 5925.0          | -60.34                | 2.00               | -58.34         | Average  | -27.0           | Pass    |


| Test Mode   | Channel | Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | EIRP (dBm/MHz) | Detector | Limit (dBm/MHz) | Verdict |
|-------------|---------|-----------------|-----------------------|--------------------|----------------|----------|-----------------|---------|
| 11N40 SISO  | 151     | 5650.0          | -48.22                | 2.00               | -46.22         | Peak     | -27.0           | Pass    |
|             |         | 5650.0          | -60.31                | 2.00               | -58.31         | Average  | -27.0           | Pass    |
|             |         | 5700.0          | -48.09                | 2.00               | -46.09         | Peak     | 10              | Pass    |
|             |         | 5700.0          | -59.49                | 2.00               | -57.49         | Average  | 10              | Pass    |
|             |         | 5720.0          | -42.91                | 2.00               | -40.91         | Peak     | 15.6            | Pass    |
|             |         | 5720.0          | -56.33                | 2.00               | -54.33         | Average  | 15.6            | Pass    |
|             |         | 5725.0          | -41.92                | 2.00               | -39.92         | Peak     | 27.0            | Pass    |
|             |         | 5725.0          | -54.87                | 2.00               | -52.87         | Average  | 27.0            | Pass    |
|             | 159     | 5850.0          | -46.78                | 2.00               | -44.78         | Peak     | 27.0            | Pass    |
|             |         | 5850.0          | -59.04                | 2.00               | -57.04         | Average  | 27.0            | Pass    |
|             |         | 5855.0          | -48.58                | 2.00               | -46.58         | Peak     | 15.6            | Pass    |
|             |         | 5855.0          | -59.16                | 2.00               | -57.16         | Average  | 15.6            | Pass    |
|             |         | 5875.0          | -47.96                | 2.00               | -45.96         | Peak     | 10              | Pass    |
|             |         | 5875.0          | -59.62                | 2.00               | -57.62         | Average  | 10              | Pass    |
|             |         | 5925.0          | -49.13                | 2.00               | -47.13         | Peak     | -27.0           | Pass    |
|             |         | 5925.0          | -60.13                | 2.00               | -58.13         | Average  | -27.0           | Pass    |
| 11AC20 SISO | 149     | 5650.0          | -48.80                | 2.00               | -46.80         | Peak     | -27.0           | Pass    |
|             |         | 5650.0          | -60.44                | 2.00               | -58.44         | Average  | -27.0           | Pass    |
|             |         | 5700.0          | -48.49                | 2.00               | -46.49         | Peak     | 10              | Pass    |
|             |         | 5700.0          | -58.15                | 2.00               | -56.15         | Average  | 10              | Pass    |
|             |         | 5720.0          | -45.83                | 2.00               | -43.83         | Peak     | 15.6            | Pass    |
|             |         | 5720.0          | -59.68                | 2.00               | -57.68         | Average  | 15.6            | Pass    |
|             |         | 5725.0          | -38.75                | 2.00               | -36.75         | Peak     | 27.0            | Pass    |
|             |         | 5725.0          | -56.17                | 2.00               | -54.17         | Average  | 27.0            | Pass    |
|             | 165     | 5850.0          | -41.86                | 2.00               | -39.86         | Peak     | 27.0            | Pass    |
|             |         | 5850.0          | -58.08                | 2.00               | -56.08         | Average  | 27.0            | Pass    |
|             |         | 5855.0          | -45.75                | 2.00               | -43.75         | Peak     | 15.6            | Pass    |
|             |         | 5855.0          | -58.65                | 2.00               | -56.65         | Average  | 15.6            | Pass    |
|             |         | 5875.0          | -47.94                | 2.00               | -45.94         | Peak     | 10              | Pass    |
|             |         | 5875.0          | -59.45                | 2.00               | -57.45         | Average  | 10              | Pass    |
|             |         | 5925.0          | -48.18                | 2.00               | -46.18         | Peak     | -27.0           | Pass    |
|             |         | 5925.0          | -60.25                | 2.00               | -58.25         | Average  | -27.0           | Pass    |
| 11AC40 SISO | 151     | 5650.0          | -48.29                | 2.00               | -46.29         | Peak     | -27.0           | Pass    |
|             |         | 5650.0          | -60.26                | 2.00               | -58.26         | Average  | -27.0           | Pass    |
|             |         | 5700.0          | -47.52                | 2.00               | -45.52         | Peak     | 10              | Pass    |
|             |         | 5700.0          | -59.43                | 2.00               | -57.43         | Average  | 10              | Pass    |
|             |         | 5720.0          | -43.92                | 2.00               | -41.92         | Peak     | 15.6            | Pass    |
|             |         | 5720.0          | -56.02                | 2.00               | -54.02         | Average  | 15.6            | Pass    |
|             |         | 5725.0          | -39.06                | 2.00               | -37.06         | Peak     | 27.0            | Pass    |
|             |         | 5725.0          | -54.46                | 2.00               | -52.46         | Average  | 27.0            | Pass    |
|             | 159     | 5850.0          | -47.78                | 2.00               | -45.78         | Peak     | 27.0            | Pass    |
|             |         | 5850.0          | -59.10                | 2.00               | -57.10         | Average  | 27.0            | Pass    |
|             |         | 5855.0          | -47.64                | 2.00               | -45.64         | Peak     | 15.6            | Pass    |
|             |         | 5855.0          | -59.20                | 2.00               | -57.20         | Average  | 15.6            | Pass    |
|             |         | 5875.0          | -48.99                | 2.00               | -46.99         | Peak     | 10              | Pass    |
|             |         | 5875.0          | -59.60                | 2.00               | -57.60         | Average  | 10              | Pass    |
|             |         | 5925.0          | -49.27                | 2.00               | -47.27         | Peak     | -27.0           | Pass    |
|             |         | 5925.0          | -60.13                | 2.00               | -58.13         | Average  | -27.0           | Pass    |
| 11AC80 SISO | 155     | 5725.0          | -48.32                | 2.00               | -46.32         | Peak     | 27.0            | Pass    |
|             |         | 5720.0          | -47.63                | 2.00               | -45.63         | Peak     | 15.6            | Pass    |
|             |         | 5700.0          | -48.12                | 2.00               | -46.12         | Peak     | 10              | Pass    |
|             |         | 5650.0          | -48.65                | 2.00               | -46.65         | Peak     | -27.0           | Pass    |
|             |         | 5725.0          | -58.69                | 2.00               | -56.69         | Average  | 27.0            | Pass    |
|             |         | 5720.0          | -58.79                | 2.00               | -56.79         | Average  | 15.6            | Pass    |
|             |         | 5700.0          | -59.32                | 2.00               | -57.32         | Average  | 10              | Pass    |
|             |         | 5650.0          | -59.87                | 2.00               | -57.87         | Average  | -27.0           | Pass    |
|             |         | 5850.0          | -48.32                | 2.00               | -46.32         | Peak     | 27.0            | Pass    |
|             |         | 5855.0          | -47.63                | 2.00               | -45.63         | Peak     | 15.6            | Pass    |

|  |  |        |        |      |        |         |       |      |
|--|--|--------|--------|------|--------|---------|-------|------|
|  |  | 5875.0 | -48.12 | 2.00 | -46.12 | Peak    | 10    | Pass |
|  |  | 5925.0 | -48.65 | 2.00 | -46.65 | Peak    | -27.0 | Pass |
|  |  | 5850.0 | -58.69 | 2.00 | -56.69 | Average | 27.0  | Pass |
|  |  | 5855.0 | -58.79 | 2.00 | -56.79 | Average | 15.6  | Pass |
|  |  | 5875.0 | -59.32 | 2.00 | -57.32 | Average | 10    | Pass |
|  |  | 5925.0 | -59.87 | 2.00 | -57.87 | Average | -27.0 | Pass |

## Undesirable Emissions Measurement

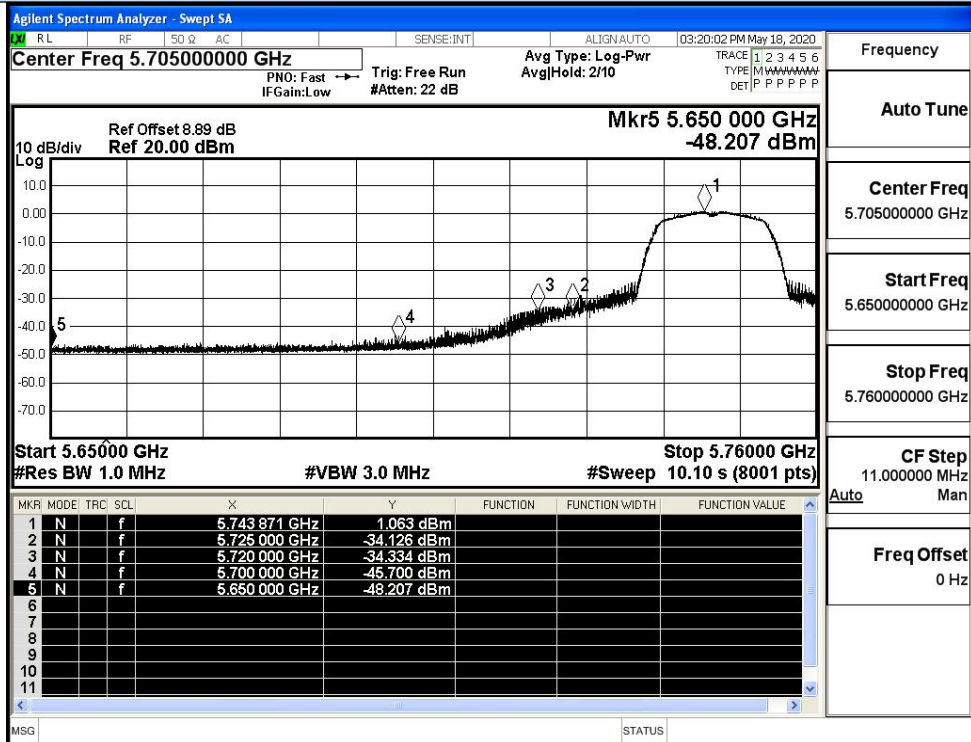


## IEEE 802.11a / Channel 149 / 5745MHz / Peak

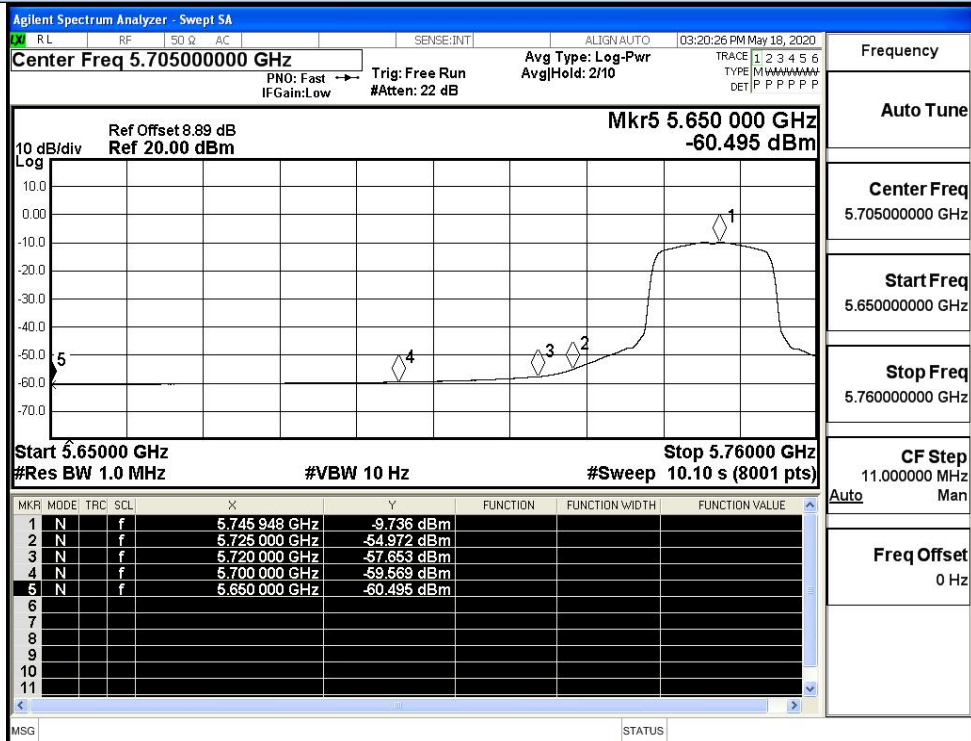


## IEEE 802.11a / Channel 148 / 5745MHz / Average

## Undesirable Emissions Measurement

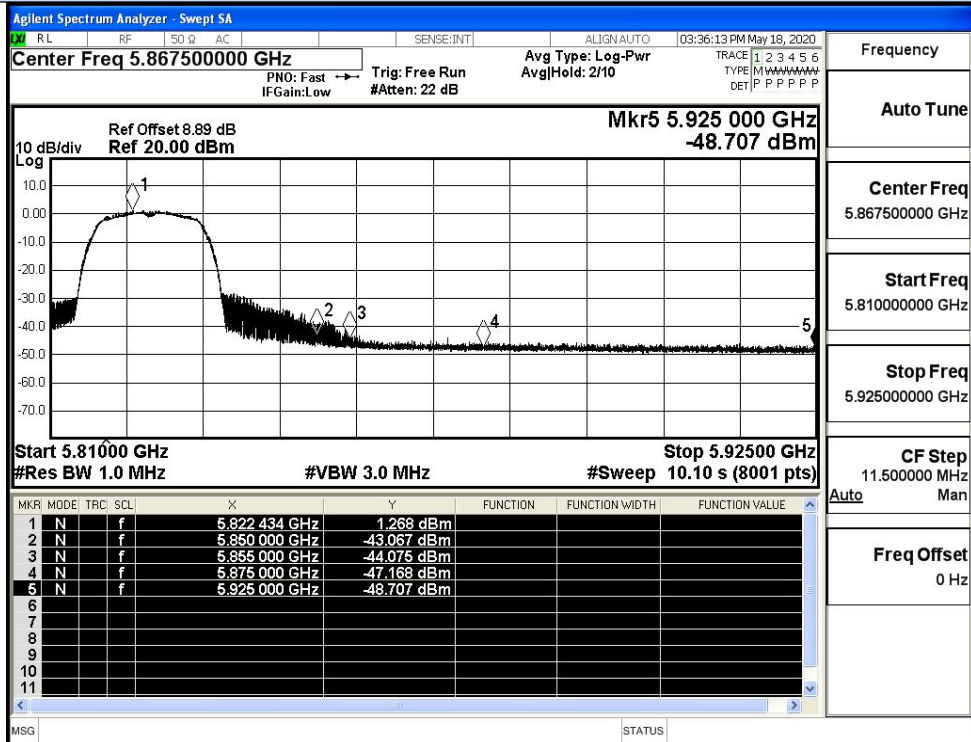


## IEEE 802.11a / Channel 165 / 5825MHz / Peak

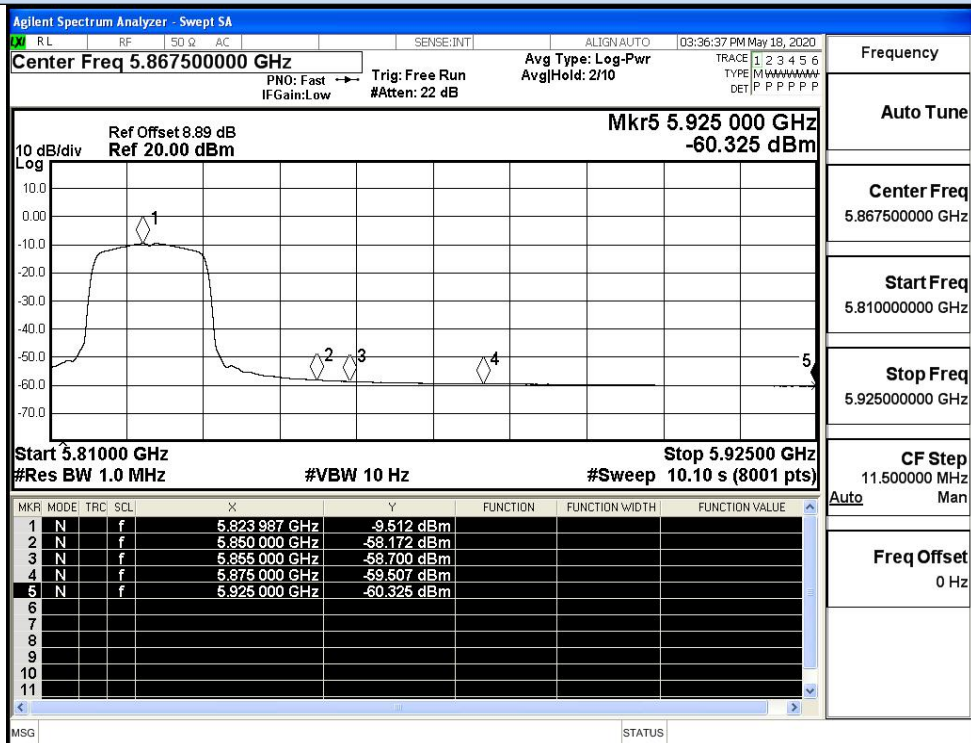


## IEEE 802.11a / Channel 165 / 5825MHz / Average

## Undesirable Emissions Measurement

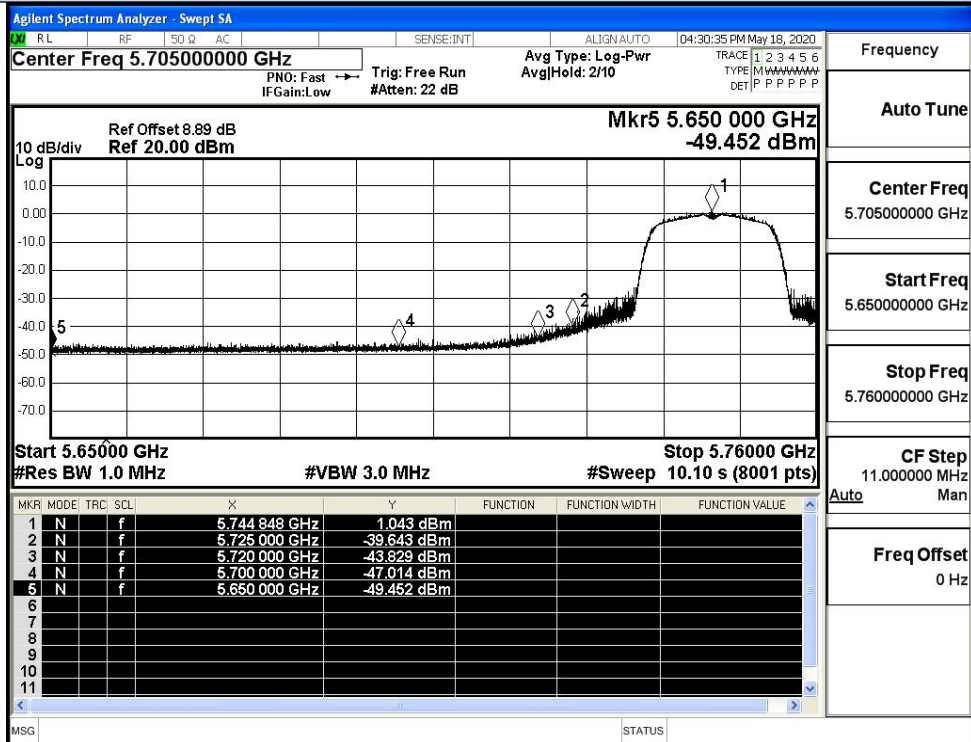


## IEEE 802.11n20 / Channel 149 / 5745MHz / Peak

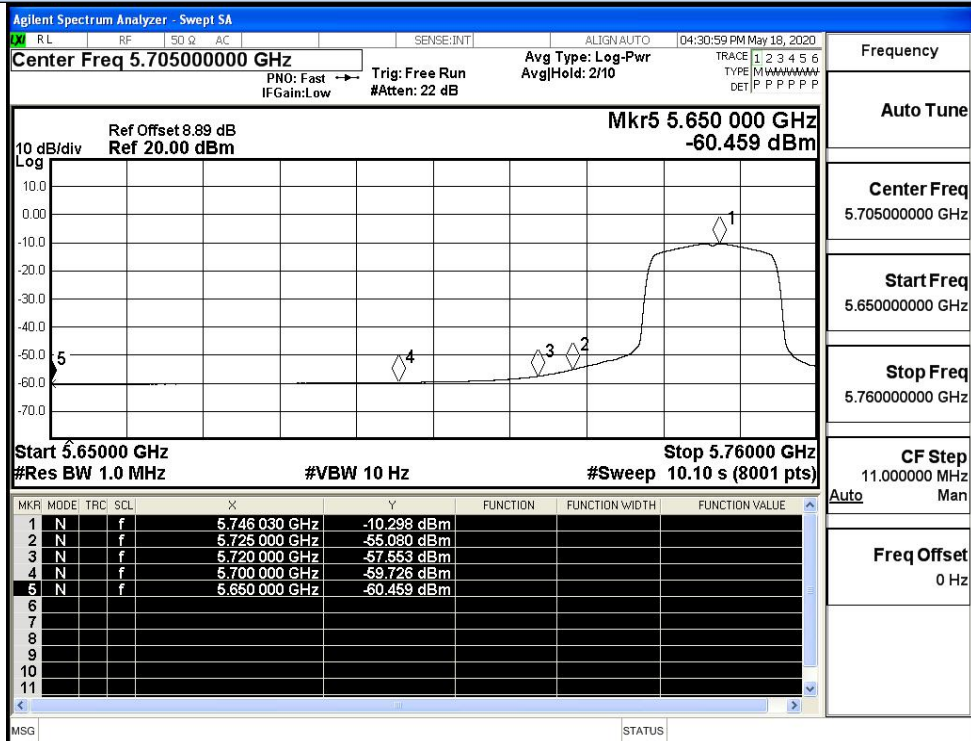


## IEEE 802.11n20 / Channel 149 / 5745MHz / Average

## Undesirable Emissions Measurement

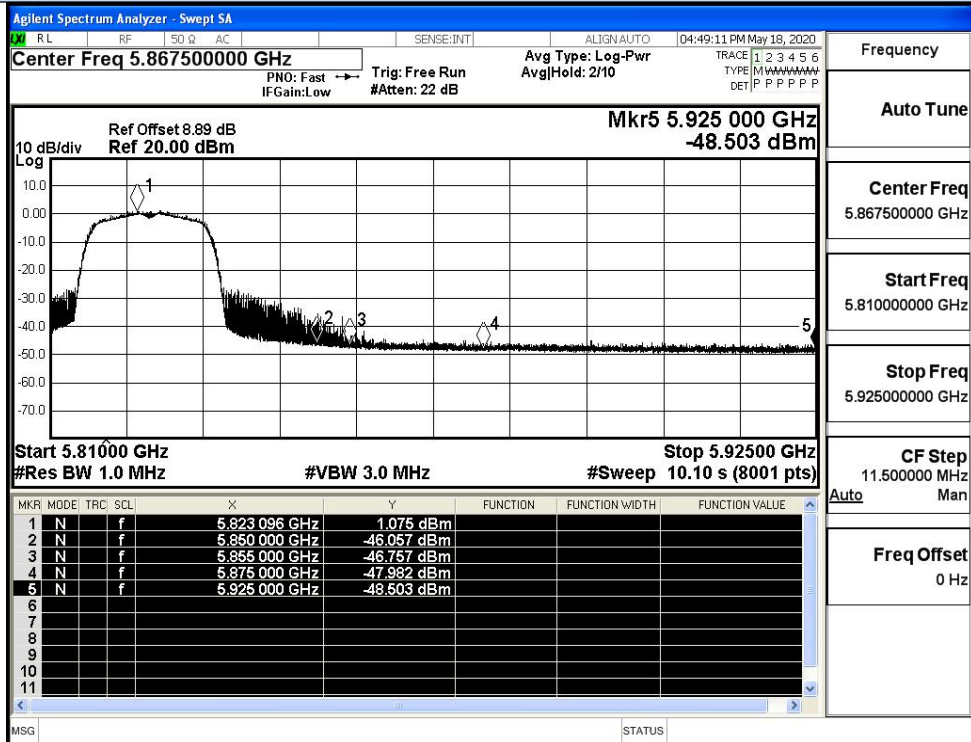


## IEEE 802.11n20 / Channel 165 / 5825MHz / Peak

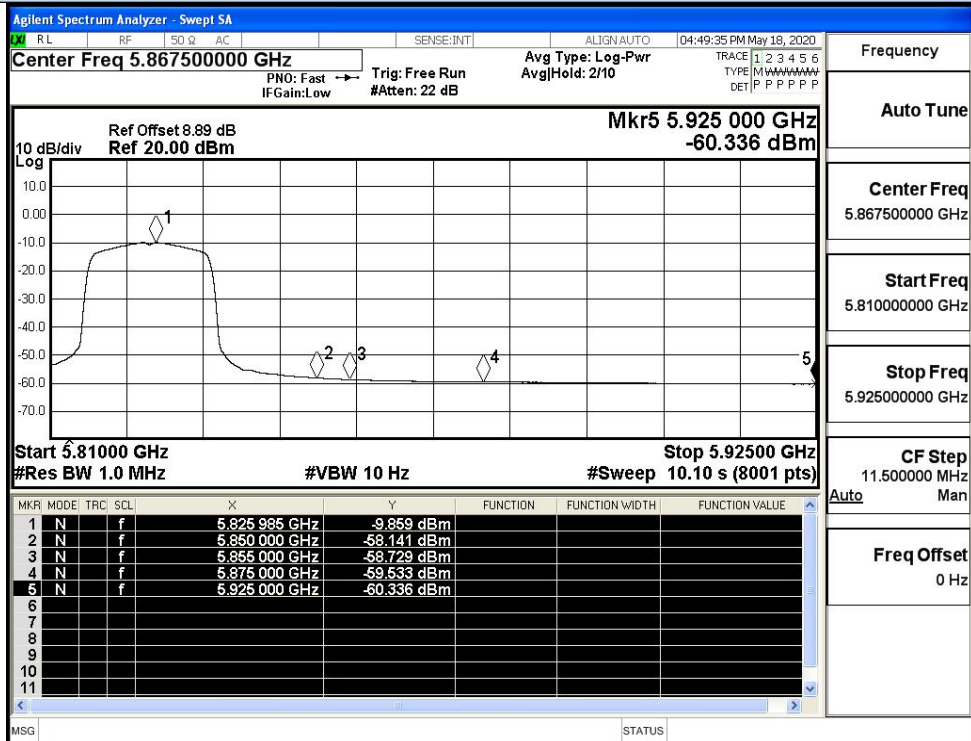


## IEEE 802.11n20 / Channel 165 / 5825MHz / Average

## Undesirable Emissions Measurement

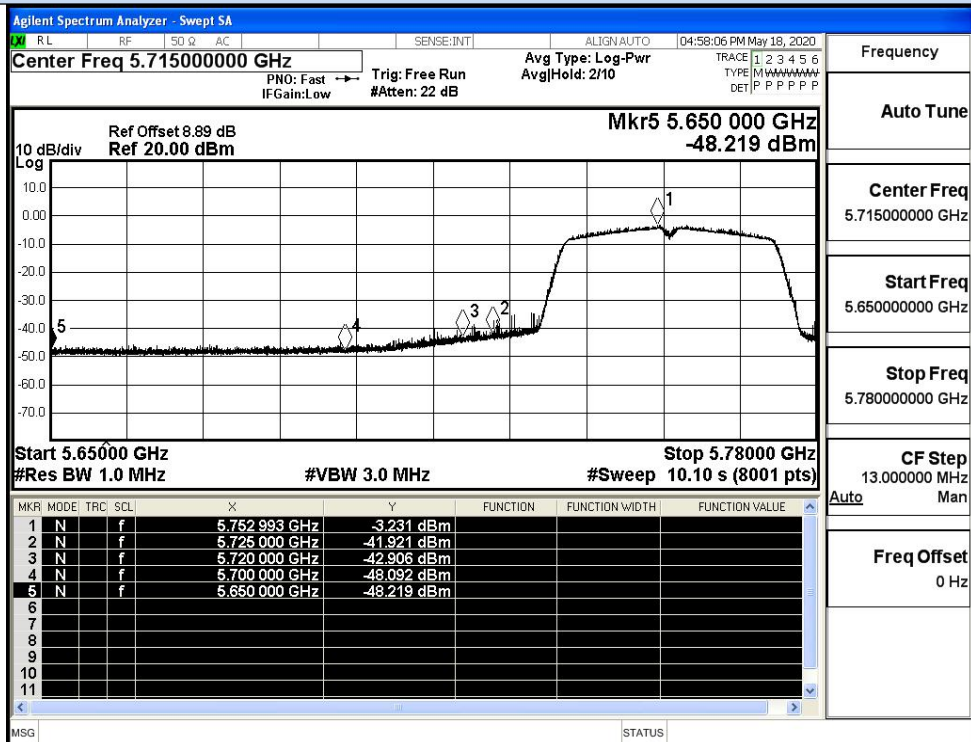


## IEEE 802.11n40 / Channel 151 / 5755MHz / Peak

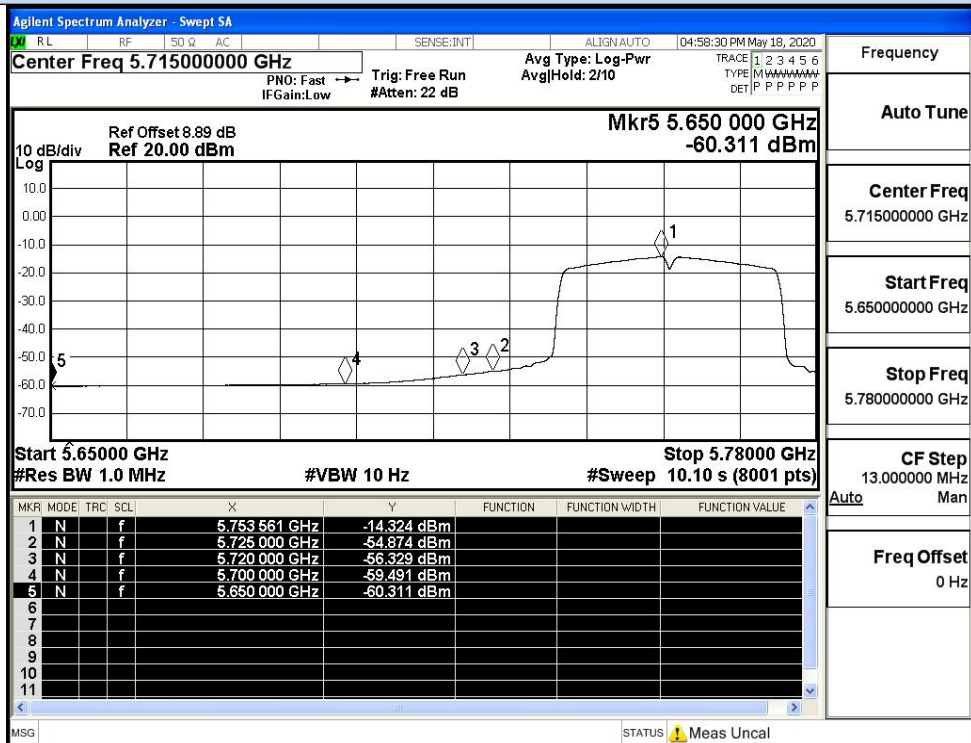


## IEEE 802.11n40 / Channel 151 / 5755MHz / Average


## Undesirable Emissions Measurement

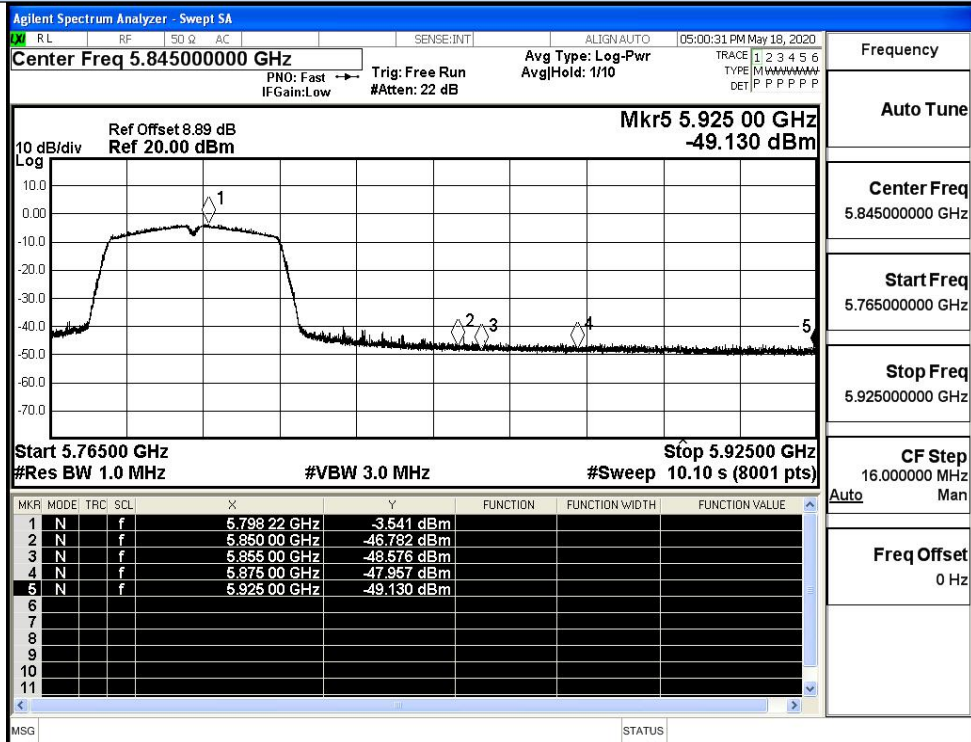


## IEEE 802.11n40 / Channel 159 / 5795MHz / Peak

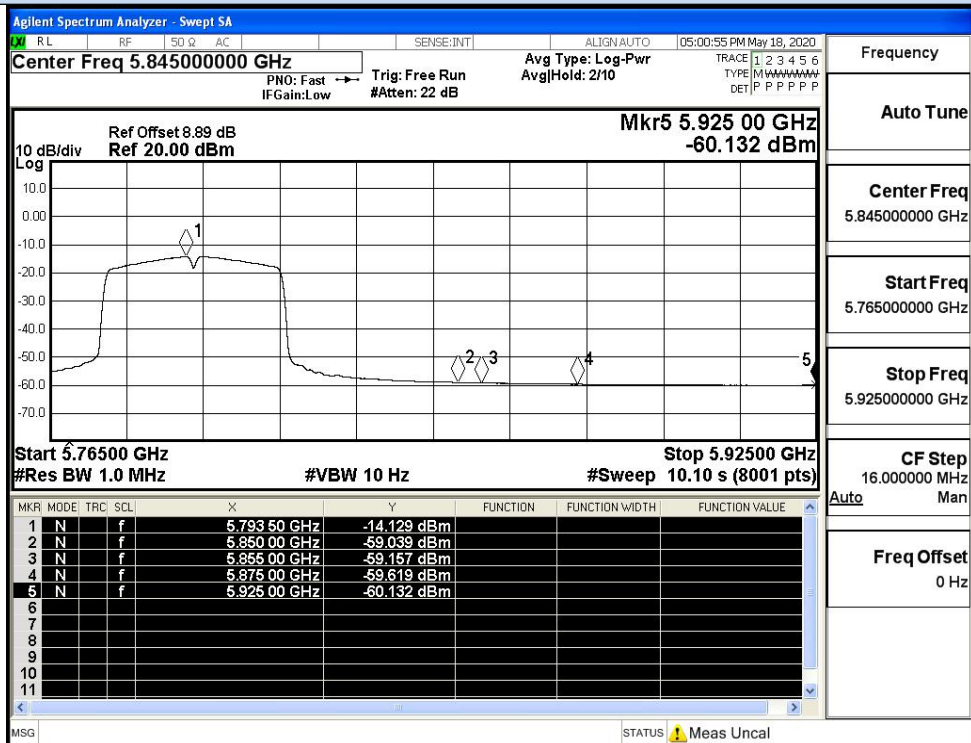


## IEEE 802.11n40 / Channel 159 / 5795MHz / Average

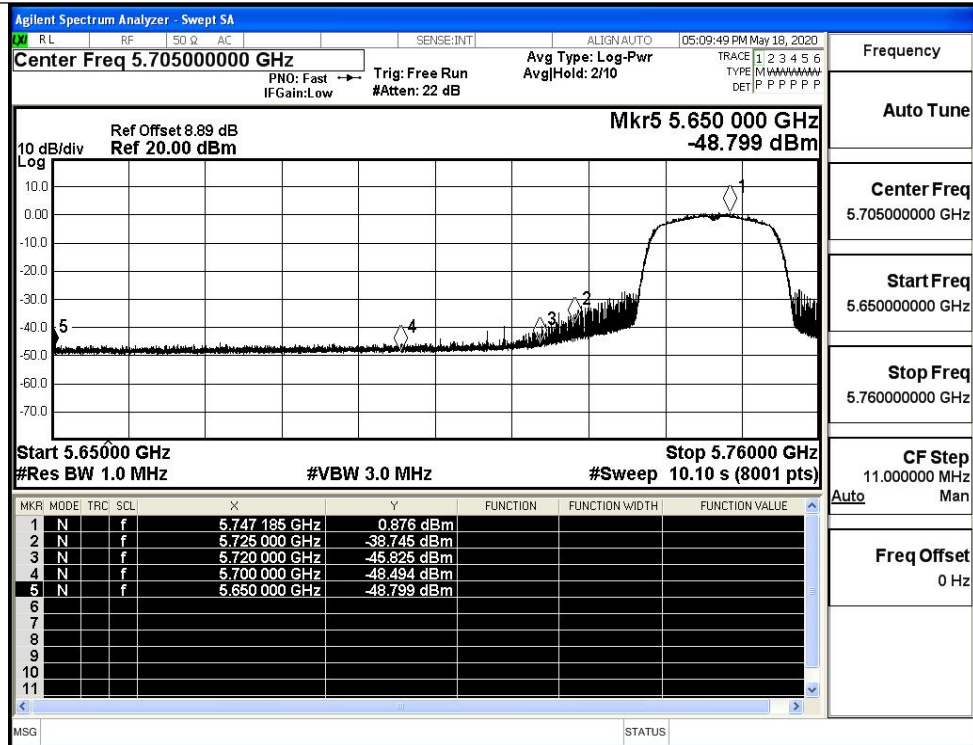


IEEE 802.11ac20 / Channel 149 / 5745MHz / Peak

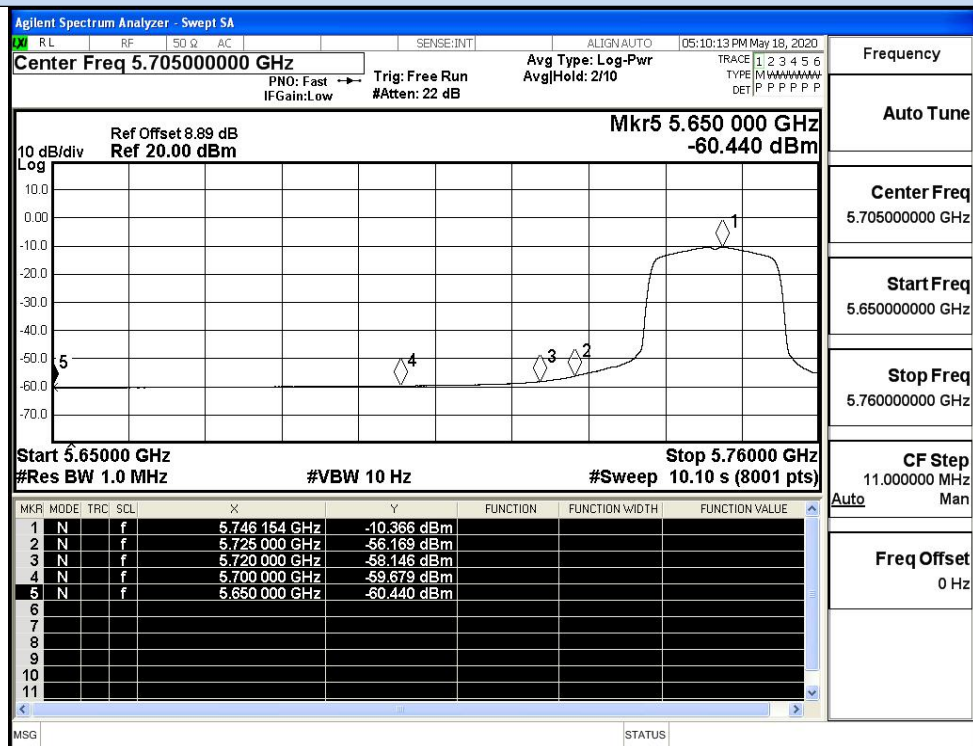


IEEE 802.11ac20 / Channel 149 / 5745MHz / Average

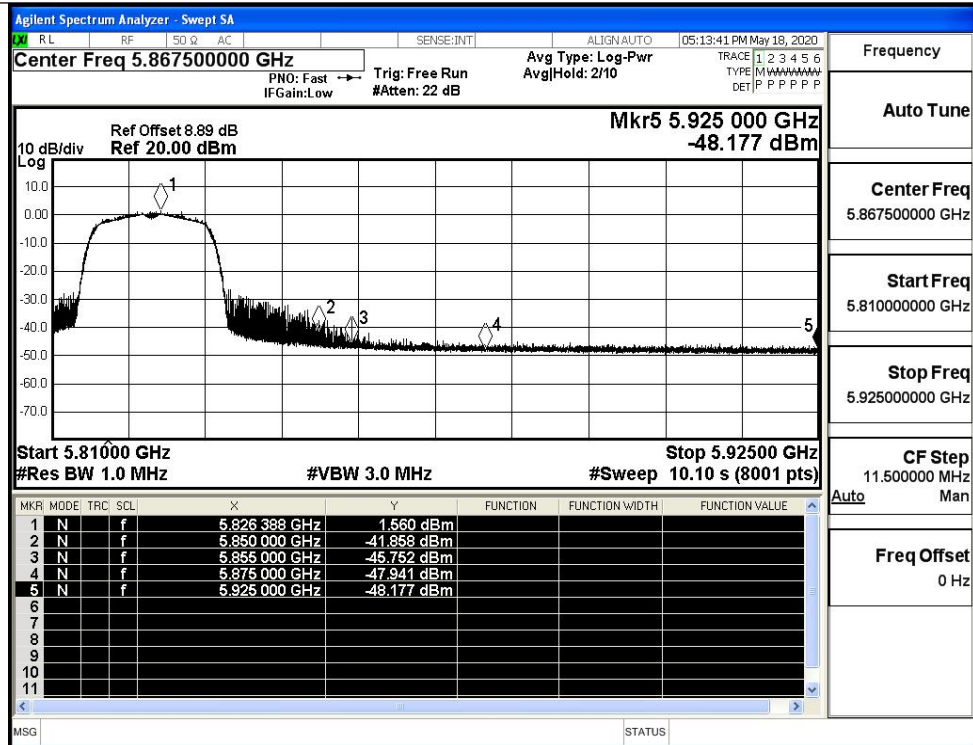


IEEE 802.11ac20 / Channel 165 / 5825MHz / Peak

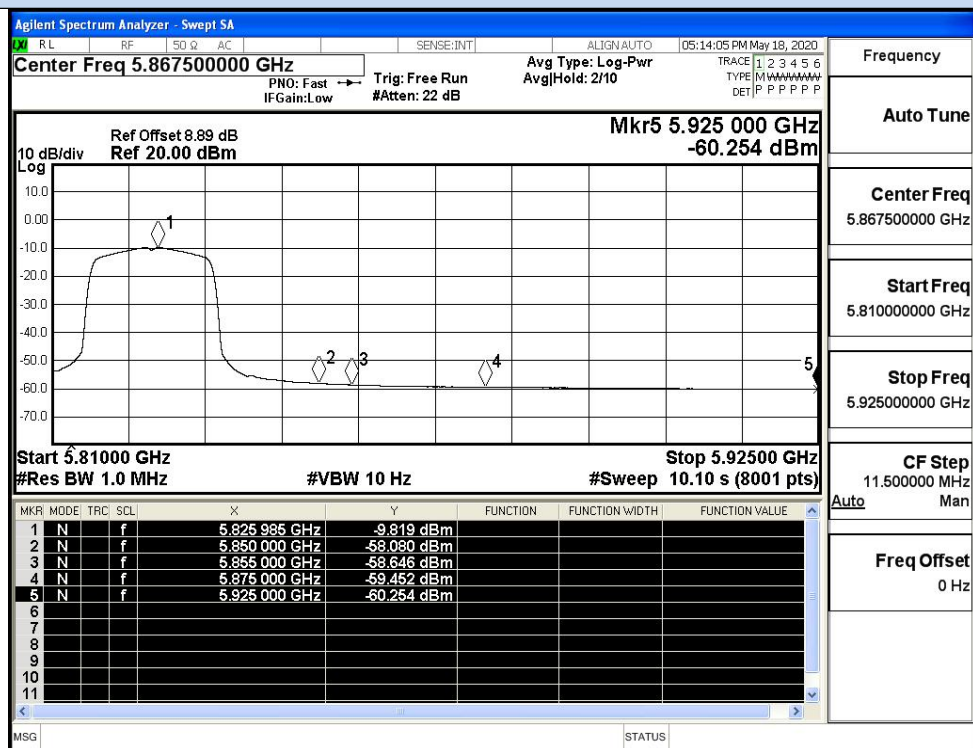


IEEE 802.11ac20 / Channel 165 / 5825MHz / Average

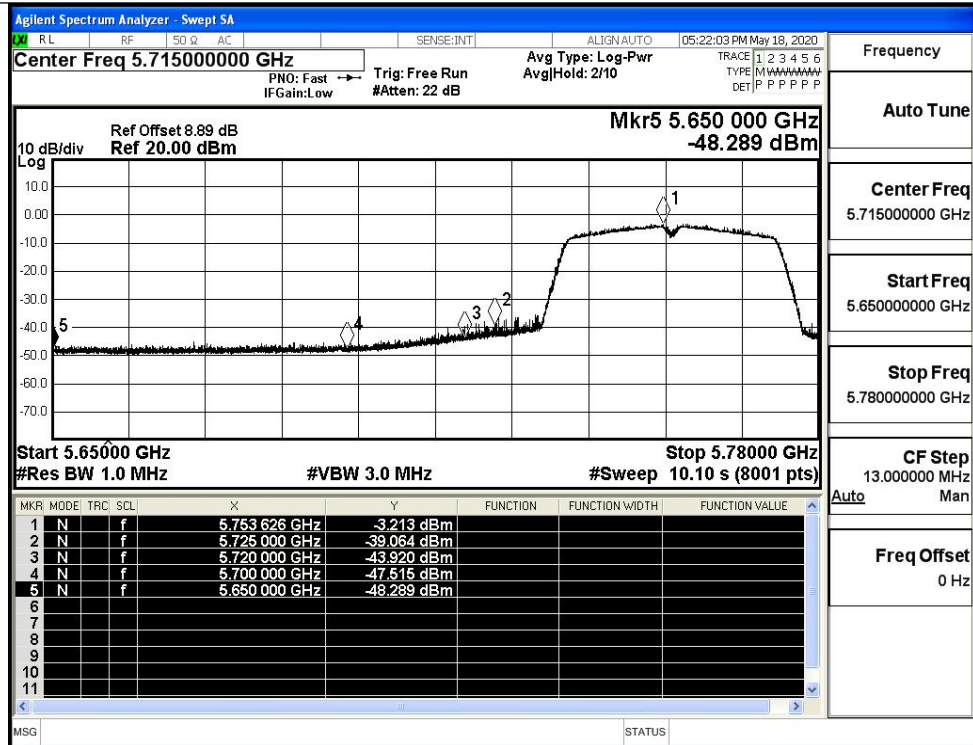


IEEE 802.11ac40 / Channel 151 / 5755MHz / Peak

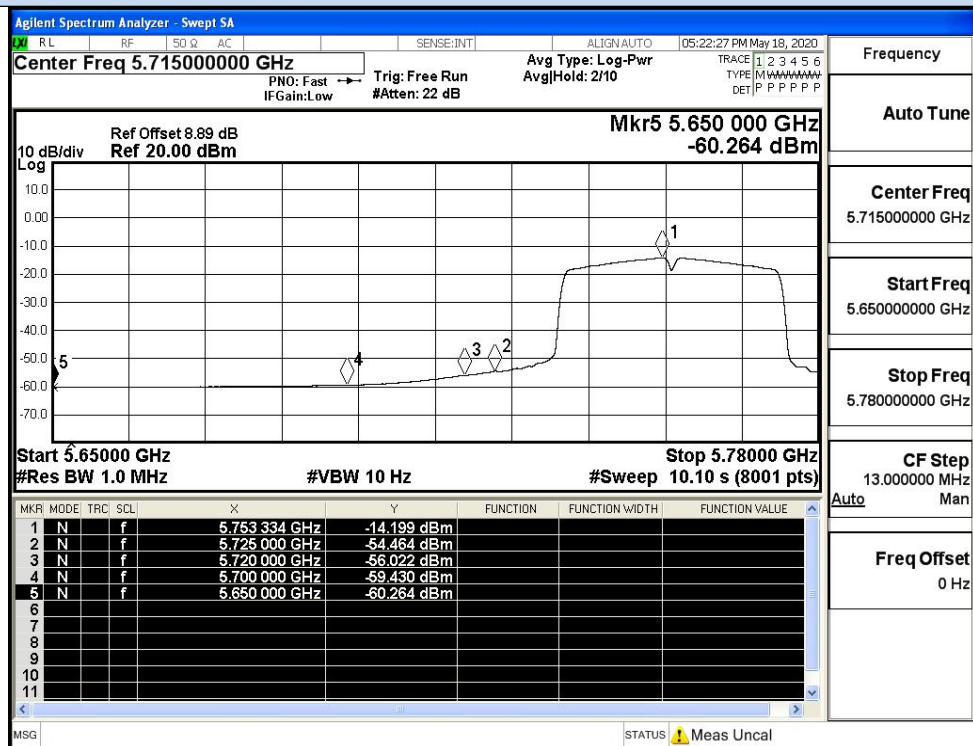


IEEE 802.11ac40 / Channel 151 / 5755MHz / Average

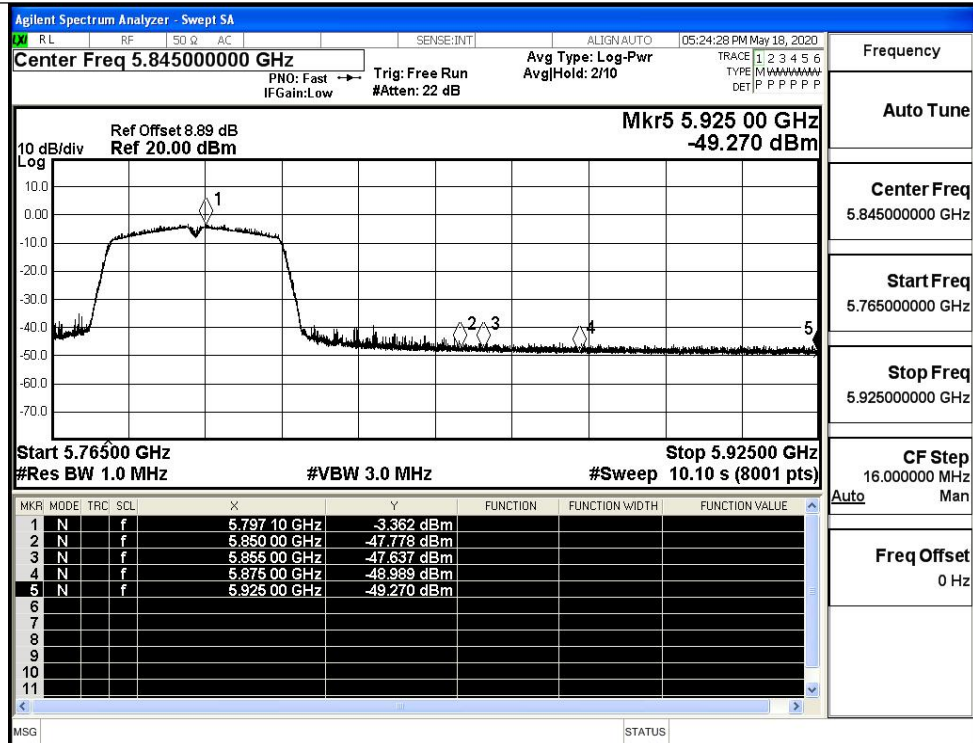

IEEE 802.11ac40 / Channel 159 / 5795MHz / Peak

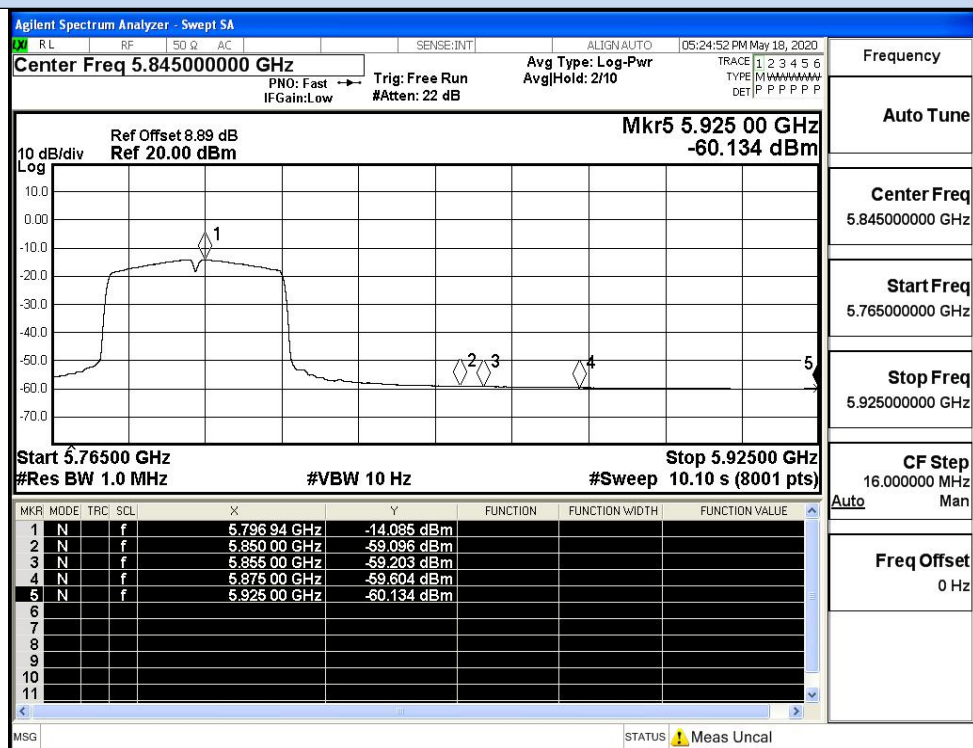

IEEE 802.11ac40 / Channel 159 / 5795MHz / Average

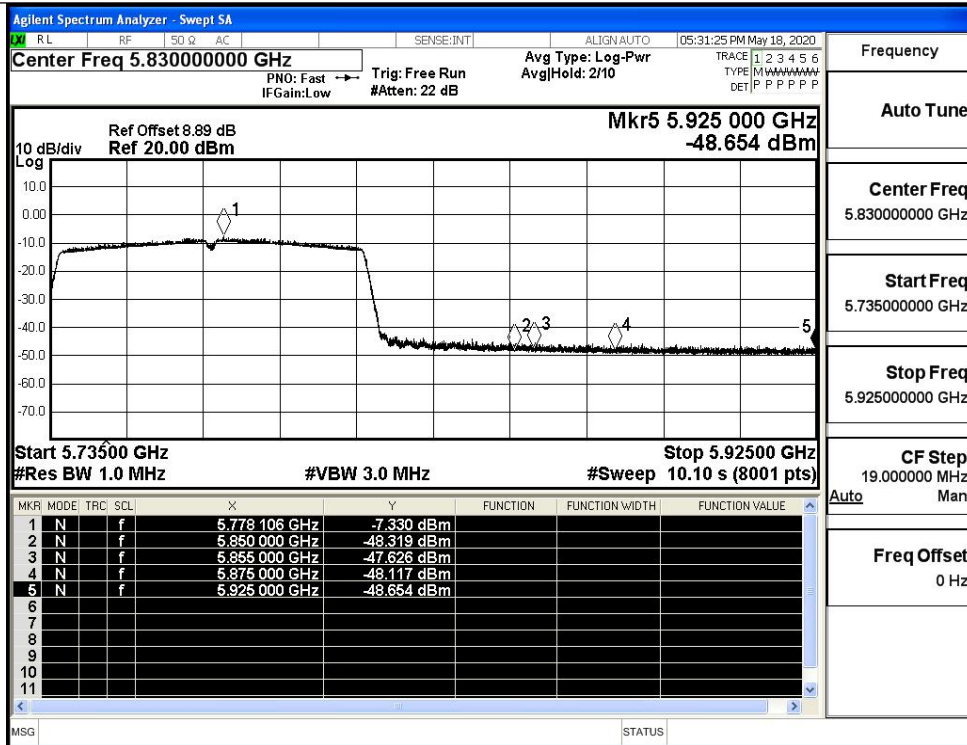


IEEE 802.11ac80 / Channel 155 / 5775MHz / Peak

#imgrb11ac80iso5775nnav

IEEE 802.11ac80 / Channel 155 / 5775MHz / Average

#imgrb11ac80iso15775nnpeak

IEEE 802.11ac80 / Channel 155/ 5775MHz / Peak

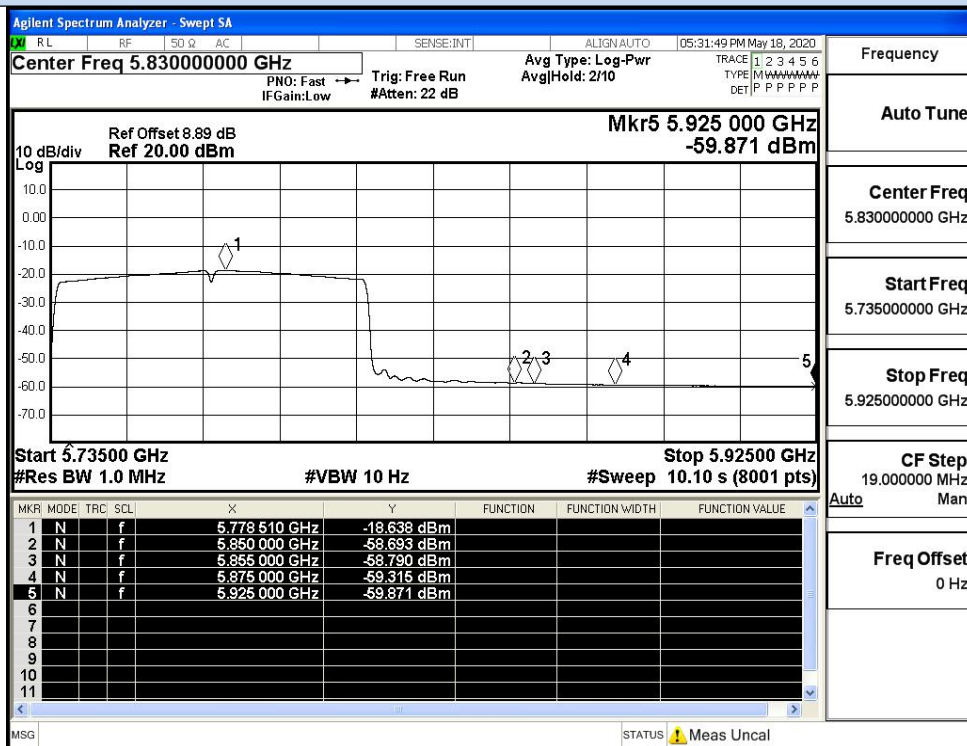

IEEE 802.11ac80 / Channel 155 / 5775MHz / Average


**ANT 1**

| Test Mode  | Channel | Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | EIRP (dBm/MHz) | Detector | Limit (dBm/MHz) | Verdict |
|------------|---------|-----------------|-----------------------|--------------------|----------------|----------|-----------------|---------|
| 11A        | 149     | 5650.0          | -47.93                | 2.00               | -47.93         | Peak     | -27.0           | Pass    |
|            |         | 5650.0          | -60.17                | 2.00               | -60.17         | Average  | -27.0           | Pass    |
|            |         | 5700.0          | -47.21                | 2.00               | -47.21         | Peak     | 10              | Pass    |
|            |         | 5700.0          | -59.28                | 2.00               | -59.28         | Average  | 10              | Pass    |
|            |         | 5720.0          | -47.00                | 2.00               | -47.00         | Peak     | 15.6            | Pass    |
|            |         | 5720.0          | -58.68                | 2.00               | -58.68         | Average  | 15.6            | Pass    |
|            |         | 5725.0          | -45.52                | 2.00               | -45.52         | Peak     | 27.0            | Pass    |
|            |         | 5725.0          | -57.89                | 2.00               | -57.89         | Average  | 27.0            | Pass    |
|            | 165     | 5850.0          | -46.58                | 2.00               | -46.58         | Peak     | 27.0            | Pass    |
|            |         | 5850.0          | -59.01                | 2.00               | -59.01         | Average  | 27.0            | Pass    |
|            |         | 5855.0          | -48.23                | 2.00               | -48.23         | Peak     | 15.6            | Pass    |
|            |         | 5855.0          | -59.46                | 2.00               | -59.46         | Average  | 15.6            | Pass    |
|            |         | 5875.0          | -47.93                | 2.00               | -47.93         | Peak     | 10              | Pass    |
|            |         | 5875.0          | -59.80                | 2.00               | -59.80         | Average  | 10              | Pass    |
|            |         | 5925.0          | -47.73                | 2.00               | -47.73         | Peak     | -27.0           | Pass    |
|            |         | 5925.0          | -60.06                | 2.00               | -60.06         | Average  | -27.0           | Pass    |
| 11N20 SISO | 149     | 5650.0          | -47.24                | 2.00               | -47.24         | Peak     | -27.0           | Pass    |
|            |         | 5650.0          | -60.18                | 2.00               | -60.18         | Average  | -27.0           | Pass    |
|            |         | 5700.0          | -47.89                | 2.00               | -47.89         | Peak     | 10              | Pass    |
|            |         | 5700.0          | -58.67                | 2.00               | -58.67         | Average  | 10              | Pass    |
|            |         | 5720.0          | -46.81                | 2.00               | -46.81         | Peak     | 15.6            | Pass    |
|            |         | 5720.0          | -59.32                | 2.00               | -59.32         | Average  | 15.6            | Pass    |
|            |         | 5725.0          | -45.83                | 2.00               | -45.83         | Peak     | 27.0            | Pass    |
|            |         | 5725.0          | -57.72                | 2.00               | -57.72         | Average  | 27.0            | Pass    |
|            | 165     | 5850.0          | -45.79                | 2.00               | -45.79         | Peak     | 27.0            | Pass    |
|            |         | 5850.0          | -59.01                | 2.00               | -59.01         | Average  | 27.0            | Pass    |
|            |         | 5855.0          | -48.51                | 2.00               | -48.51         | Peak     | 15.6            | Pass    |
|            |         | 5855.0          | -59.51                | 2.00               | -59.51         | Average  | 15.6            | Pass    |
|            |         | 5875.0          | -47.77                | 2.00               | -47.77         | Peak     | 10              | Pass    |
|            |         | 5875.0          | -59.82                | 2.00               | -59.82         | Average  | 10              | Pass    |
|            |         | 5925.0          | -48.22                | 2.00               | -48.22         | Peak     | -27.0           | Pass    |
|            |         | 5925.0          | -60.09                | 2.00               | -60.09         | Average  | -27.0           | Pass    |


| Test Mode   | Channel | Frequency (MHz) | Conducted Power (dBm) | Antenna Gain (dBi) | EIRP (dBm/MHz) | Detector | Limit (dBm/MHz) | Verdict |
|-------------|---------|-----------------|-----------------------|--------------------|----------------|----------|-----------------|---------|
| 11N40 SISO  | 151     | 5650.0          | -47.52                | 2.00               | -47.52         | Peak     | -27.0           | Pass    |
|             |         | 5650.0          | -60.11                | 2.00               | -60.11         | Average  | -27.0           | Pass    |
|             |         | 5700.0          | -45.76                | 2.00               | -45.76         | Peak     | 10              | Pass    |
|             |         | 5700.0          | -59.19                | 2.00               | -59.19         | Average  | 10              | Pass    |
|             |         | 5720.0          | -46.53                | 2.00               | -46.53         | Peak     | 15.6            | Pass    |
|             |         | 5720.0          | -57.86                | 2.00               | -57.86         | Average  | 15.6            | Pass    |
|             |         | 5725.0          | -44.92                | 2.00               | -44.92         | Peak     | 27.0            | Pass    |
|             |         | 5725.0          | -57.27                | 2.00               | -57.27         | Average  | 27.0            | Pass    |
|             | 159     | 5850.0          | -46.21                | 2.00               | -46.21         | Peak     | 27.0            | Pass    |
|             |         | 5850.0          | -58.18                | 2.00               | -58.18         | Average  | 27.0            | Pass    |
|             |         | 5855.0          | -46.32                | 2.00               | -46.32         | Peak     | 15.6            | Pass    |
|             |         | 5855.0          | -58.32                | 2.00               | -58.32         | Average  | 15.6            | Pass    |
|             |         | 5875.0          | -45.79                | 2.00               | -45.79         | Peak     | 10              | Pass    |
|             |         | 5875.0          | -58.20                | 2.00               | -58.20         | Average  | 10              | Pass    |
|             |         | 5925.0          | -47.69                | 2.00               | -47.69         | Peak     | -27.0           | Pass    |
|             |         | 5925.0          | -58.84                | 2.00               | -58.84         | Average  | -27.0           | Pass    |
| 11AC20 SISO | 149     | 5650.0          | -47.37                | 2.00               | -47.37         | Peak     | -27.0           | Pass    |
|             |         | 5650.0          | -60.18                | 2.00               | -60.18         | Average  | -27.0           | Pass    |
|             |         | 5700.0          | -46.86                | 2.00               | -46.86         | Peak     | 10              | Pass    |
|             |         | 5700.0          | -58.69                | 2.00               | -58.69         | Average  | 10              | Pass    |
|             |         | 5720.0          | -46.74                | 2.00               | -46.74         | Peak     | 15.6            | Pass    |
|             |         | 5720.0          | -59.28                | 2.00               | -59.28         | Average  | 15.6            | Pass    |
|             |         | 5725.0          | -46.24                | 2.00               | -46.24         | Peak     | 27.0            | Pass    |
|             |         | 5725.0          | -57.66                | 2.00               | -57.66         | Average  | 27.0            | Pass    |
|             | 165     | 5850.0          | -46.87                | 2.00               | -46.87         | Peak     | 27.0            | Pass    |
|             |         | 5850.0          | -59.02                | 2.00               | -59.02         | Average  | 27.0            | Pass    |
|             |         | 5855.0          | -47.39                | 2.00               | -47.39         | Peak     | 15.6            | Pass    |
|             |         | 5855.0          | -59.47                | 2.00               | -59.47         | Average  | 15.6            | Pass    |
|             |         | 5875.0          | -47.98                | 2.00               | -47.98         | Peak     | 10              | Pass    |
|             |         | 5875.0          | -59.84                | 2.00               | -59.84         | Average  | 10              | Pass    |
|             |         | 5925.0          | -47.87                | 2.00               | -47.87         | Peak     | -27.0           | Pass    |
|             |         | 5925.0          | -60.16                | 2.00               | -60.16         | Average  | -27.0           | Pass    |
| 11AC40 SISO | 151     | 5650.0          | -48.50                | 2.00               | -48.50         | Peak     | -27.0           | Pass    |
|             |         | 5650.0          | -60.12                | 2.00               | -60.12         | Average  | -27.0           | Pass    |
|             |         | 5700.0          | -47.26                | 2.00               | -47.26         | Peak     | 10              | Pass    |
|             |         | 5700.0          | -59.22                | 2.00               | -59.22         | Average  | 10              | Pass    |
|             |         | 5720.0          | -46.55                | 2.00               | -46.55         | Peak     | 15.6            | Pass    |
|             |         | 5720.0          | -57.98                | 2.00               | -57.98         | Average  | 15.6            | Pass    |
|             |         | 5725.0          | -44.93                | 2.00               | -44.93         | Peak     | 27.0            | Pass    |
|             |         | 5725.0          | -57.36                | 2.00               | -57.36         | Average  | 27.0            | Pass    |
|             | 159     | 5850.0          | -46.78                | 2.00               | -46.78         | Peak     | 27.0            | Pass    |
|             |         | 5850.0          | -58.14                | 2.00               | -58.14         | Average  | 27.0            | Pass    |
|             |         | 5855.0          | -47.53                | 2.00               | -47.53         | Peak     | 15.6            | Pass    |
|             |         | 5855.0          | -58.34                | 2.00               | -58.34         | Average  | 15.6            | Pass    |
|             |         | 5875.0          | -47.16                | 2.00               | -47.16         | Peak     | 10              | Pass    |
|             |         | 5875.0          | -58.18                | 2.00               | -58.18         | Average  | 10              | Pass    |
|             |         | 5925.0          | -45.50                | 2.00               | -45.50         | Peak     | -27.0           | Pass    |
|             |         | 5925.0          | -58.90                | 2.00               | -58.90         | Average  | -27.0           | Pass    |
| 11AC80 SISO | 155     | 5725.0          | -47.63                | 2.00               | -47.63         | Peak     | 27.0            | Pass    |
|             |         | 5720.0          | -47.89                | 2.00               | -47.89         | Peak     | 15.6            | Pass    |
|             |         | 5700.0          | -48.49                | 2.00               | -48.49         | Peak     | 10              | Pass    |
|             |         | 5650.0          | -50.45                | 2.00               | -50.45         | Peak     | -27.0           | Pass    |
|             |         | 5725.0          | -57.01                | 2.00               | -57.01         | Average  | 27.0            | Pass    |
|             |         | 5720.0          | -57.54                | 2.00               | -57.54         | Average  | 15.6            | Pass    |
|             |         | 5700.0          | -58.64                | 2.00               | -58.64         | Average  | 10              | Pass    |

|  |  |        |        |      |        |         |       |      |
|--|--|--------|--------|------|--------|---------|-------|------|
|  |  | 5650.0 | -59.94 | 2.00 | -59.94 | Average | -27.0 | Pass |
|  |  | 5850.0 | -47.63 | 2.00 | -47.63 | Peak    | 27.0  | Pass |
|  |  | 5855.0 | -47.89 | 2.00 | -47.89 | Peak    | 15.6  | Pass |
|  |  | 5875.0 | -48.49 | 2.00 | -48.49 | Peak    | 10    | Pass |
|  |  | 5925.0 | -50.45 | 2.00 | -50.45 | Peak    | -27.0 | Pass |
|  |  | 5850.0 | -57.01 | 2.00 | -57.01 | Average | 27.0  | Pass |
|  |  | 5855.0 | -57.54 | 2.00 | -57.54 | Average | 15.6  | Pass |
|  |  | 5875.0 | -58.64 | 2.00 | -58.64 | Average | 10    | Pass |
|  |  | 5925.0 | -59.94 | 2.00 | -59.94 | Average | -27.0 | Pass |

## Undesirable Emissions Measurement

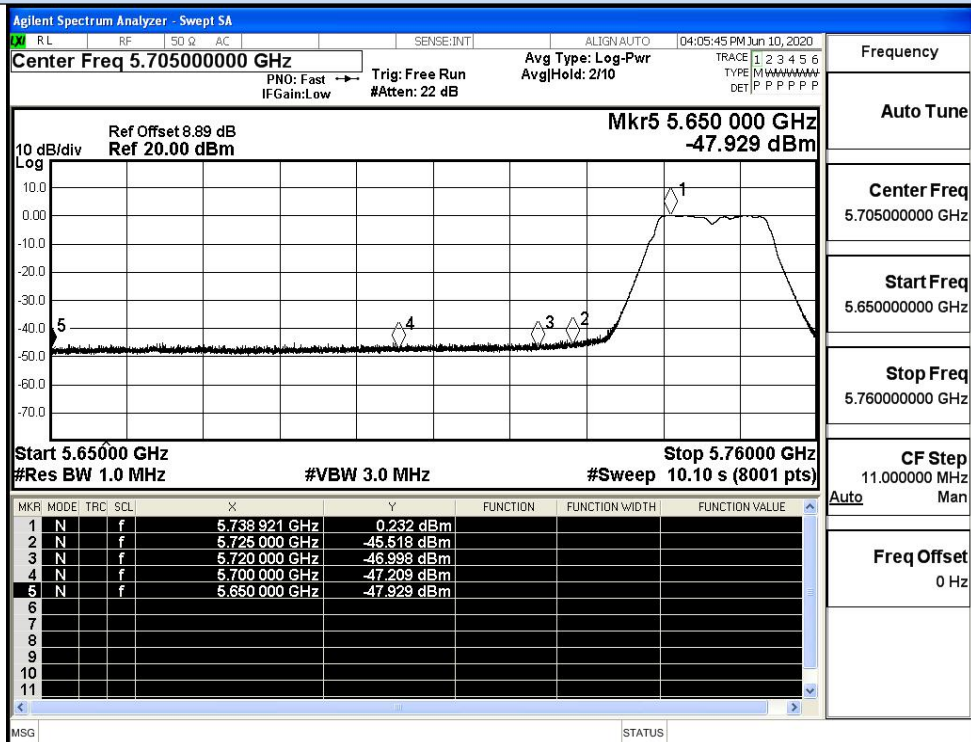


## IEEE 802.11a / Channel 149 / 5745MHz / Peak

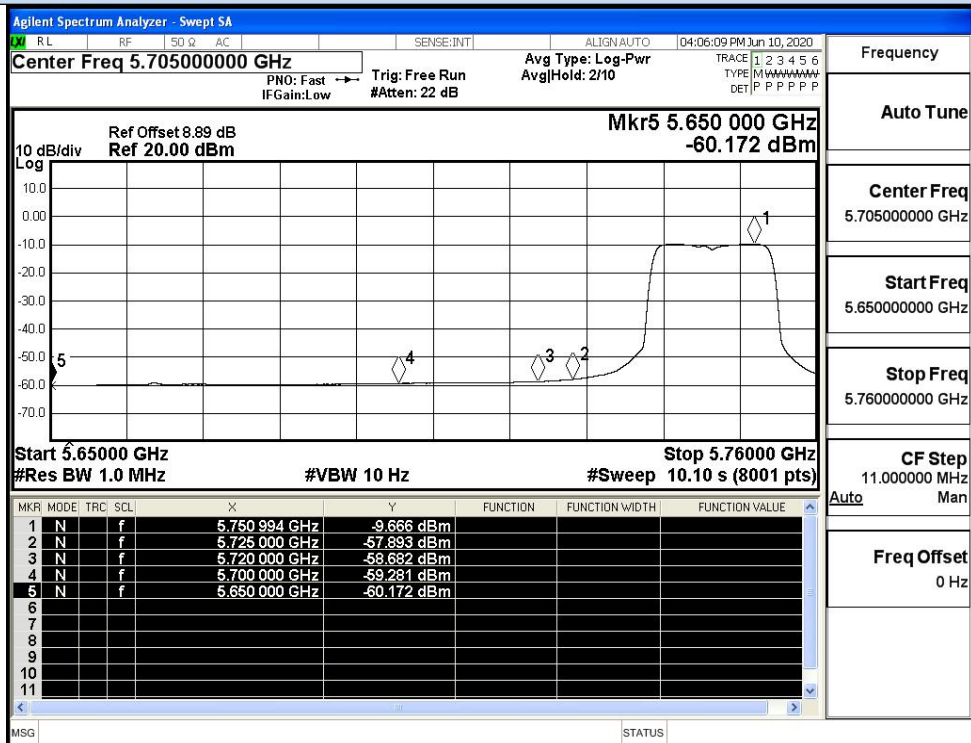


## IEEE 802.11a / Channel 148 / 5745MHz / Average

## Undesirable Emissions Measurement

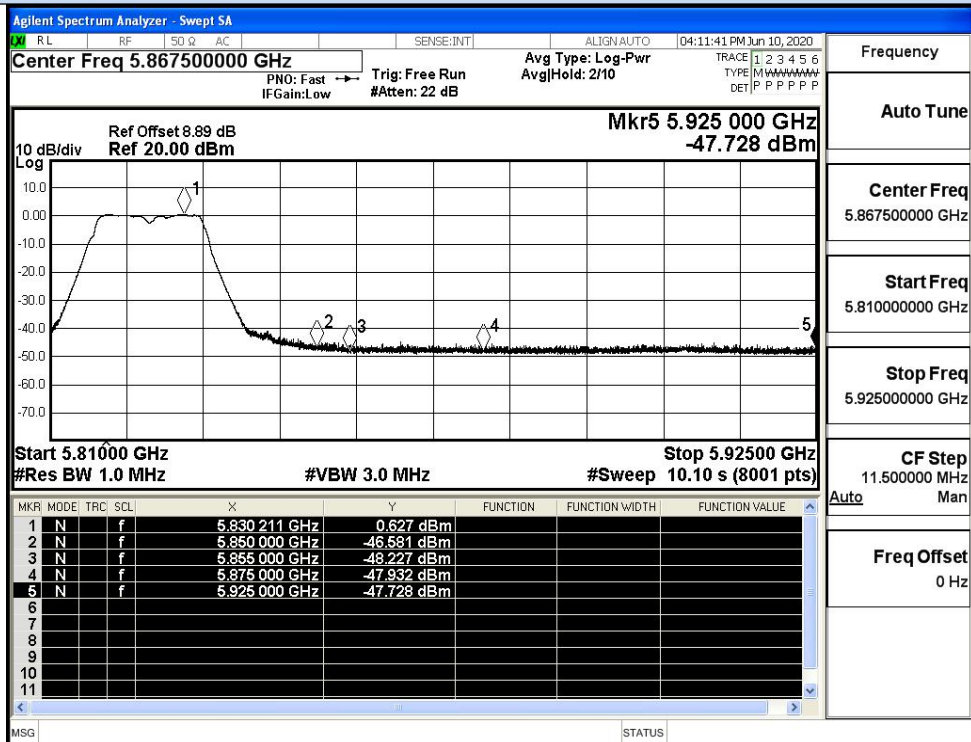

## IEEE 802.11a / Channel 165 / 5825MHz / Peak

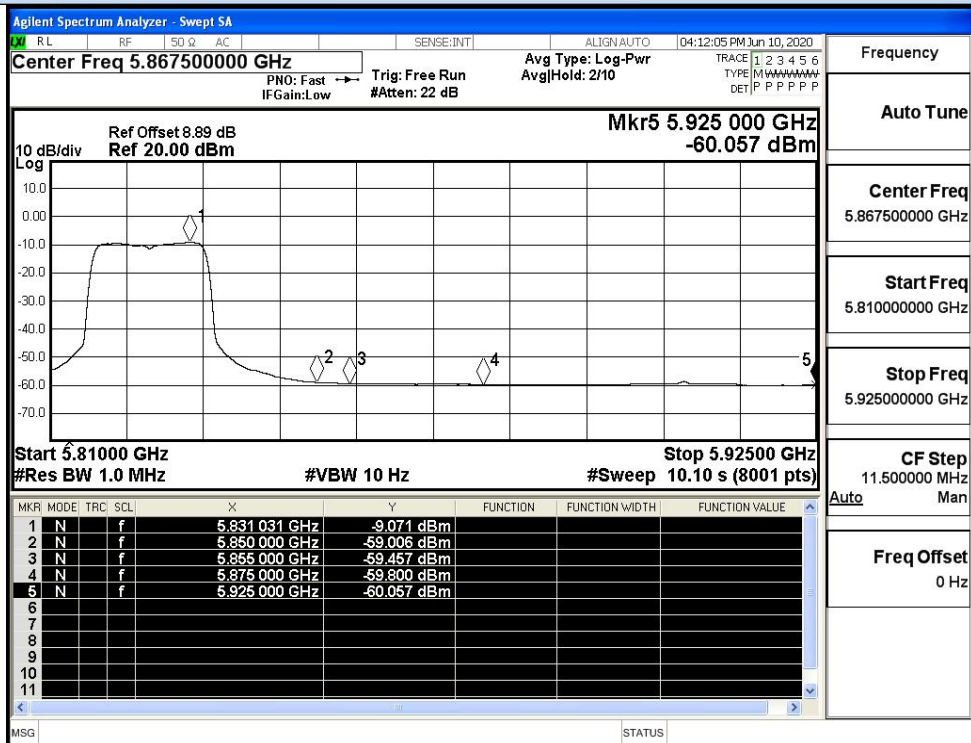

## IEEE 802.11a / Channel 165 / 5825MHz / Average