

Appendix A-RSE Above 1GHz Test Result

Test Data

1GHz-40GHz

Environmental Conditions

Temperature:	24.3 to 25.1 °C
Relative Humidity:	55 to 48 %
ATM Pressure:	101.1 kPa
Test Engineer:	Kevin Lv
Test Date:	2025-11-12 to 2025-12-05
EUT Operation Mode:	Transmitting


Test Result: Compliance, please refer to the below data.

Note 1: For 1GHz-8GHz, the fundamental with band reject filter.

Note 2: For 18GHz-40GHz, the maximum output power mode and channel: 802.11be320 Additional Channel 6745MHz was tested.

U-NII 5 Band(5925-6425 MHz)

802.11be20 Low Channel 1GHz-8GHz_HORIZONTAL

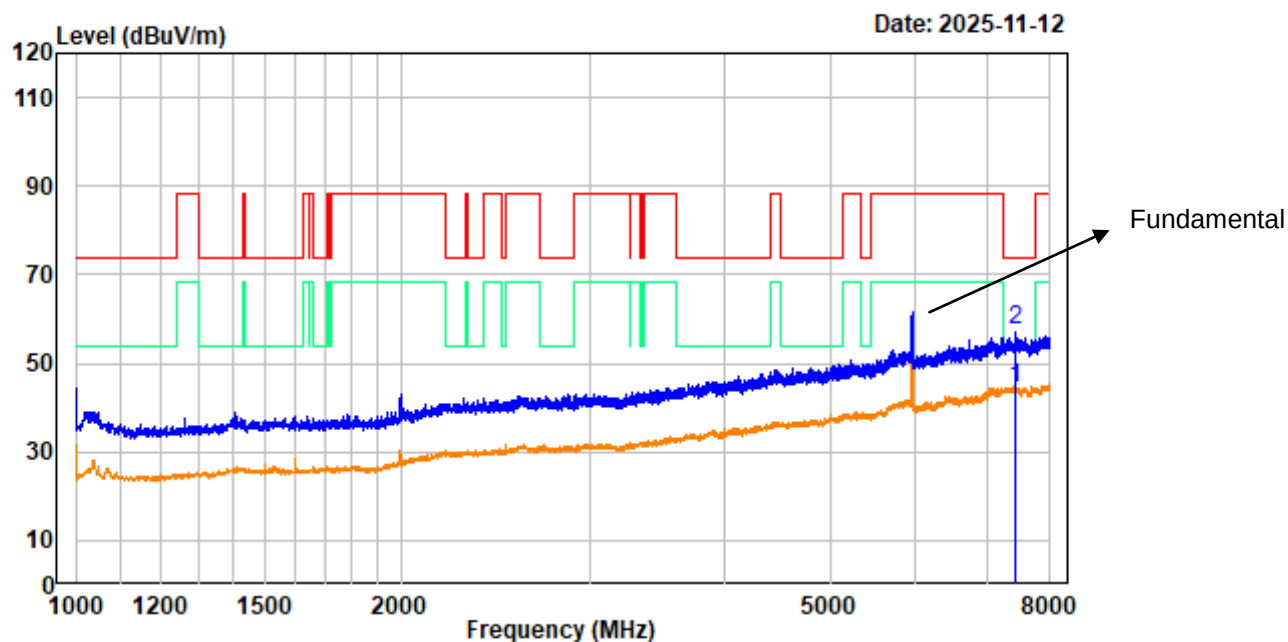

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504Z00193E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11be20 Low Channel 5955MHz 1GHz-8GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7436.500	-1.00	45.36	44.36	54.00	-9.64	average
2	7436.500	-1.00	58.31	57.31	74.00	-16.69	peak


802.11be20 Low Channel 1GHz-8GHz_VERTICAL

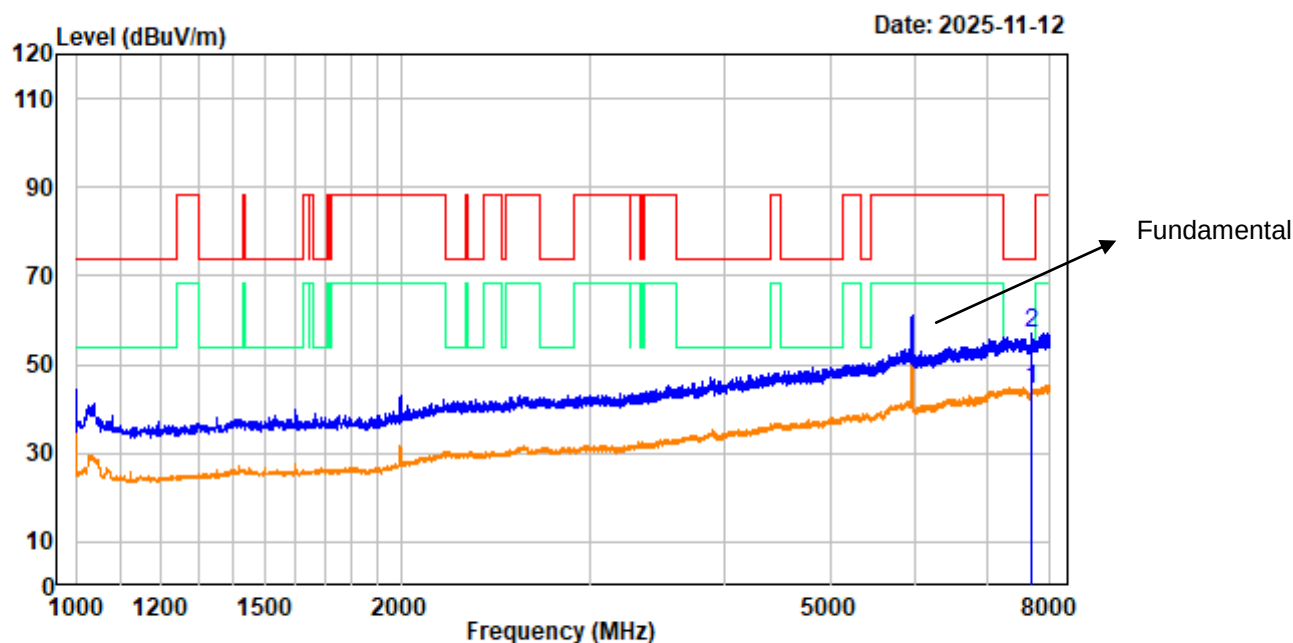

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Low Channel 5955MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7695.500	-0.77	44.92	44.15	54.00	-9.85	average
2	7695.500	-0.77	57.88	57.11	74.00	-16.89	peak


802.11be20 Low Channel 8GHz-18GHz_HORIZONTAL

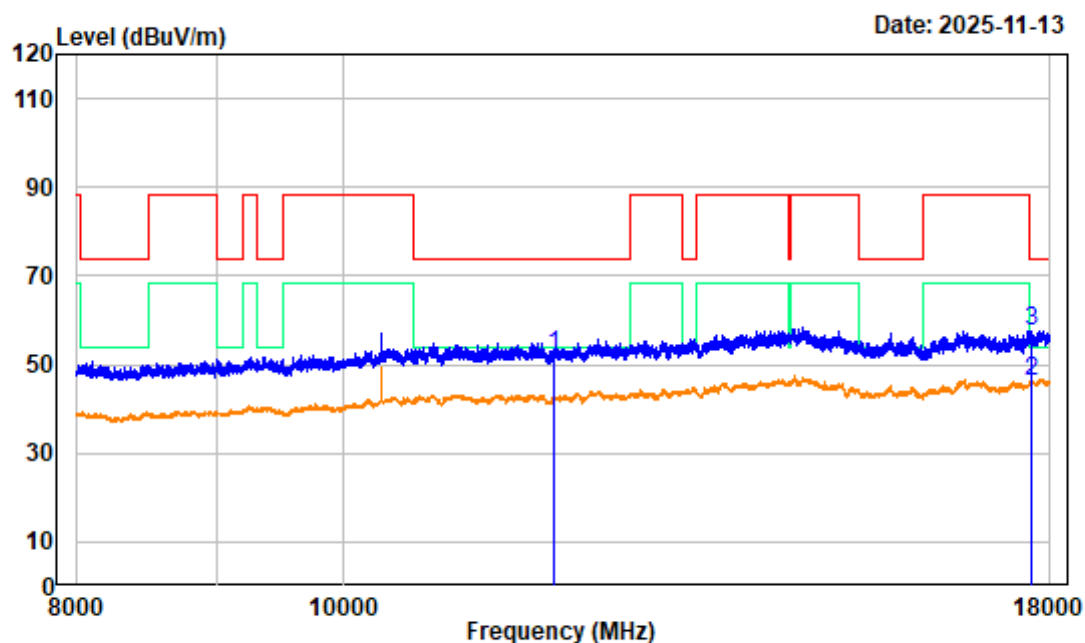

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Low Channel 5955MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11910.000	4.76	47.31	52.07	74.00	-21.93	Peak
2	17715.000	7.68	38.30	45.98	54.00	-8.02	average
3	17715.000	7.68	50.03	57.71	74.00	-16.29	peak


802.11be20 Low Channel 8GHz-18GHz_VERTICAL

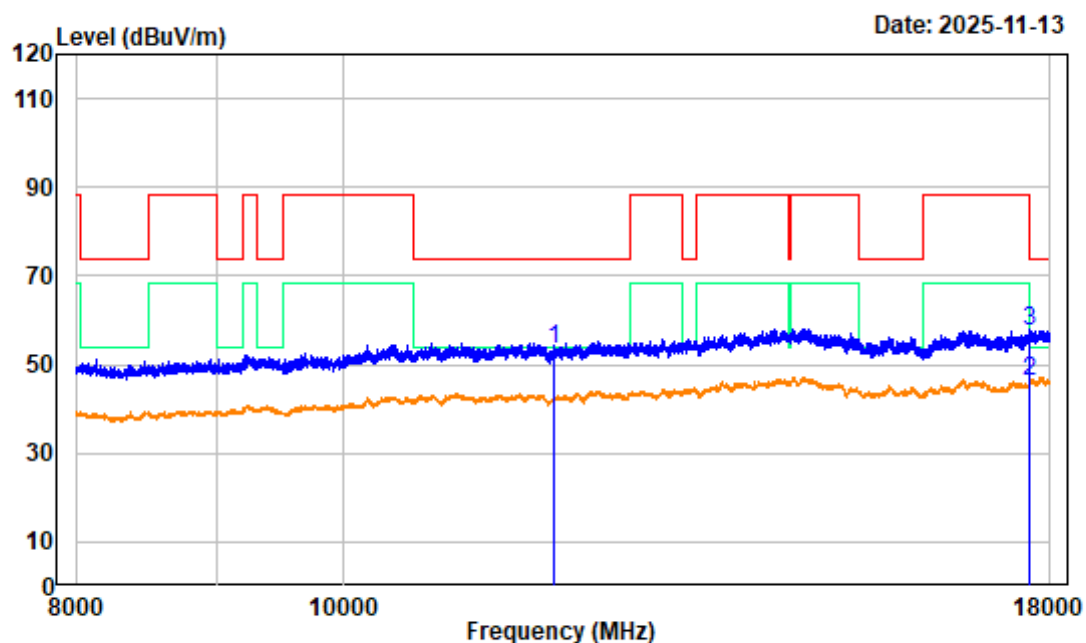

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Low Channel 5955MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11910.000	4.76	48.71	53.47	74.00	-20.53	Peak
2	17703.750	7.66	38.69	46.35	54.00	-7.65	average
3	17703.750	7.66	50.07	57.73	74.00	-16.27	peak


802.11be20 Middle Channel 1GHz-8GHz_HORIZONTAL

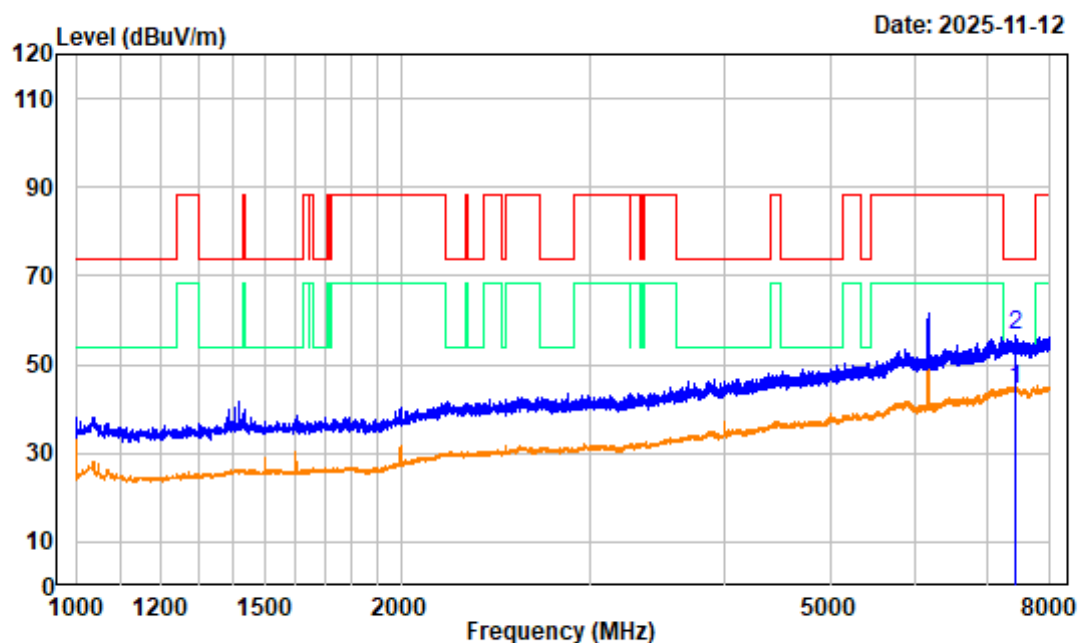

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Middle Channel 6175MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7441.750	-0.97	45.36	44.39	54.00	-9.61	average
2	7441.750	-0.97	57.35	56.38	74.00	-17.62	peak


802.11be20 Middle Channel 1GHz-8GHz_VERTICAL

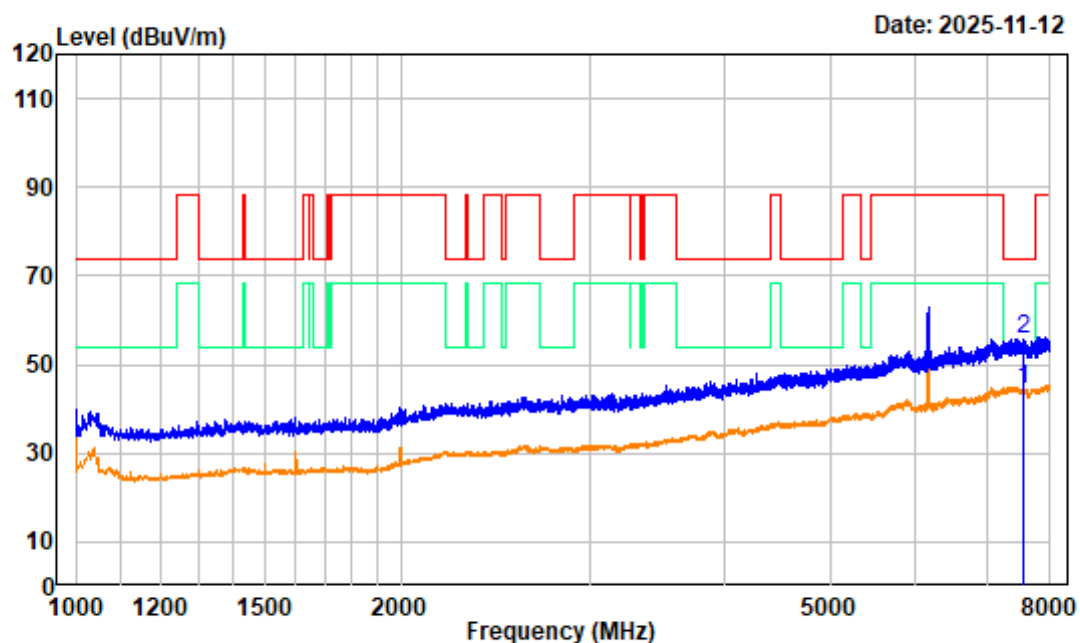

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Middle Channel 6175MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7566.000	-1.06	45.31	44.25	54.00	-9.75	average
2	7566.000	-1.06	56.88	55.82	74.00	-18.18	peak


802.11be20 Middle Channel 8GHz-18GHz_HORIZONTAL

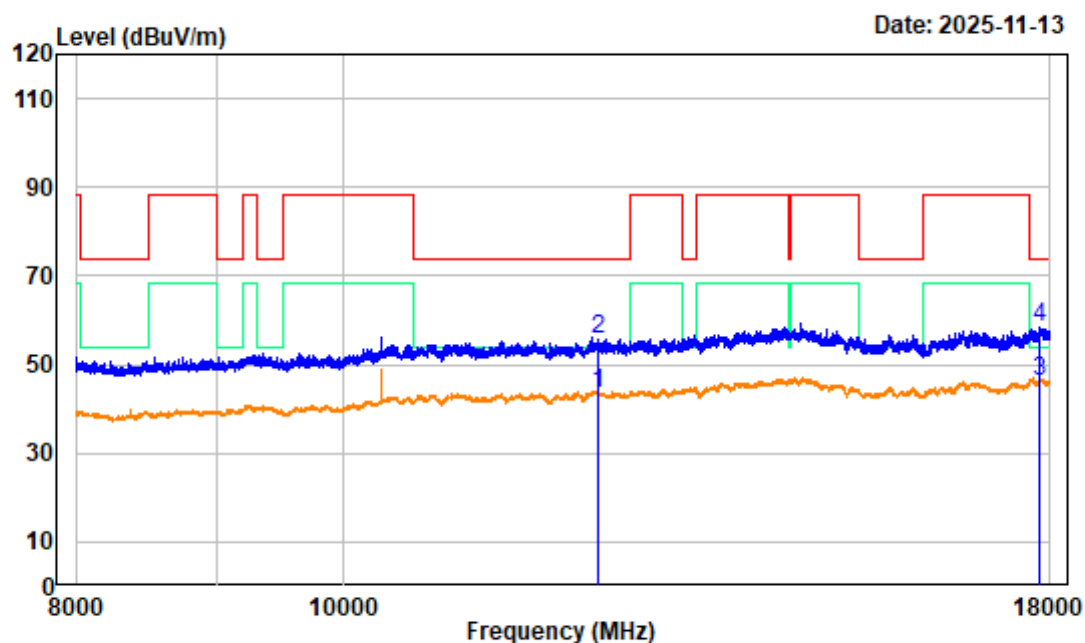

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Middle Channel 6175MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12350.000	6.57	36.88	43.45	54.00	-10.55	average
2	12350.000	6.57	48.93	55.50	74.00	-18.50	peak
3	17850.000	8.32	37.88	46.20	54.00	-7.80	average
4	17850.000	8.32	49.98	58.30	74.00	-15.70	peak


802.11be20 Middle Channel 8GHz-18GHz_VERTICAL

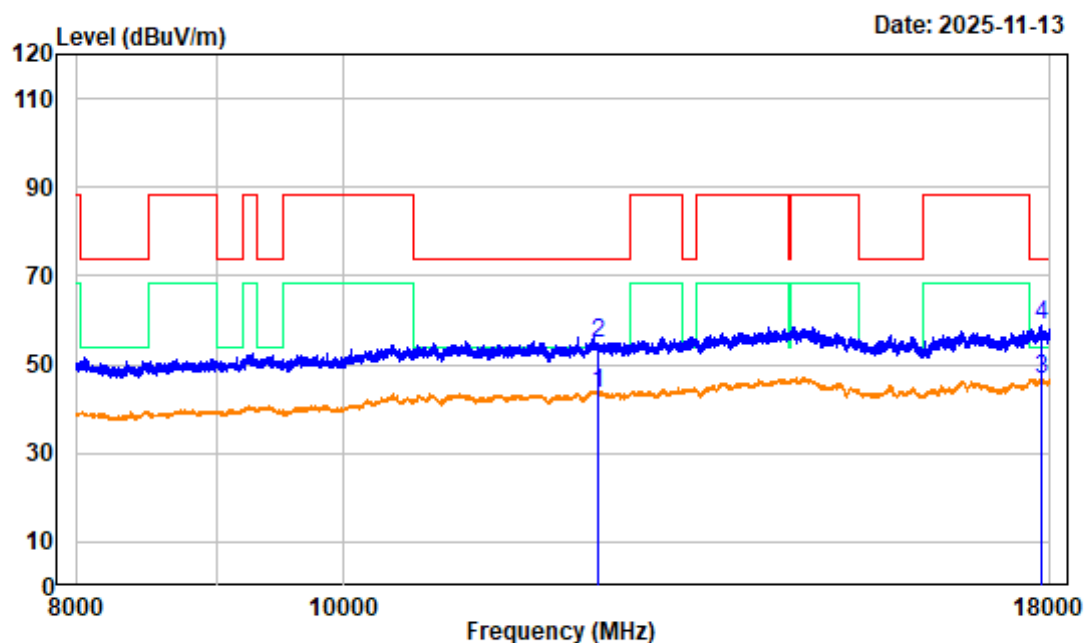

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Middle Channel 6175MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12350.000	6.57	36.99	43.56	54.00	-10.44	average
2	12350.000	6.57	48.40	54.97	74.00	-19.03	peak
3	17865.000	8.30	38.28	46.58	54.00	-7.42	average
4	17865.000	8.30	50.40	58.70	74.00	-15.30	peak


802.11be20 High Channel 1GHz-8GHz_HORIZONTAL

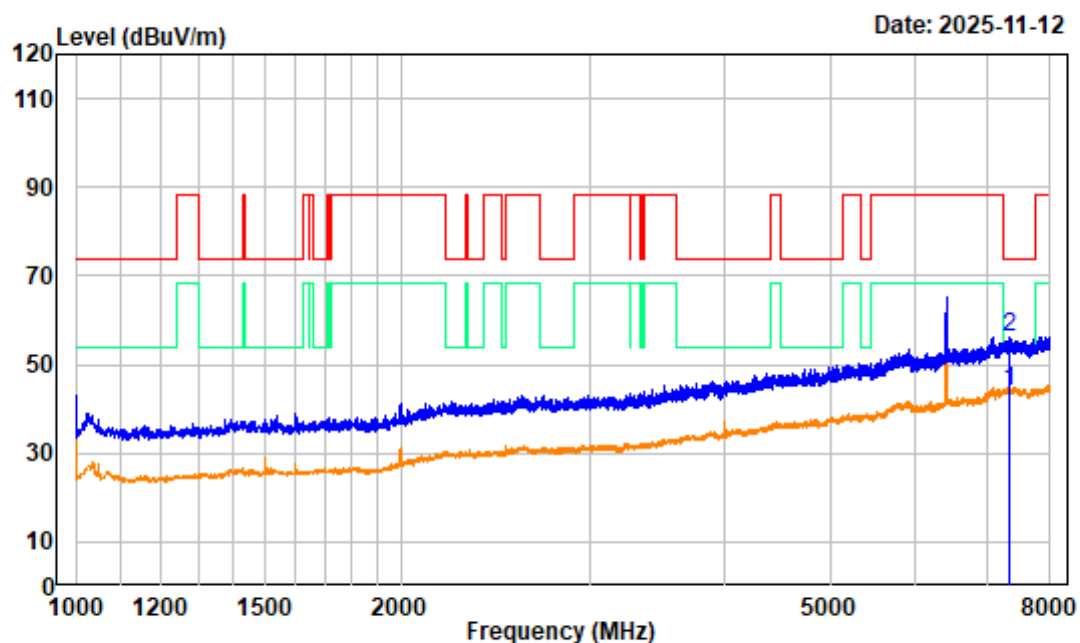

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 High Channel 6415MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7322.750	-1.16	45.21	44.05	54.00	-9.95	average
2	7322.750	-1.16	57.16	56.00	74.00	-18.00	peak


802.11be20 High Channel 1GHz-8GHz_VERTICAL

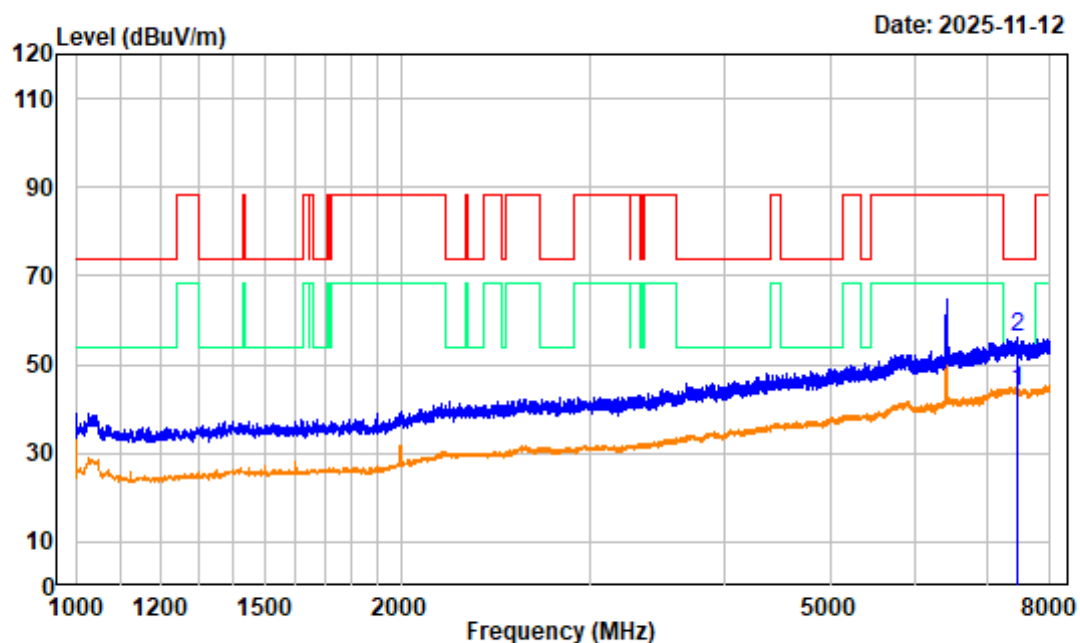

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 High Channel 6415MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7447.875	-0.91	44.96	44.05	54.00	-9.95	average
2	7447.875	-0.91	56.93	56.02	74.00	-17.98	peak


802.11be20 High Channel 8GHz-18GHz_HORIZONTAL

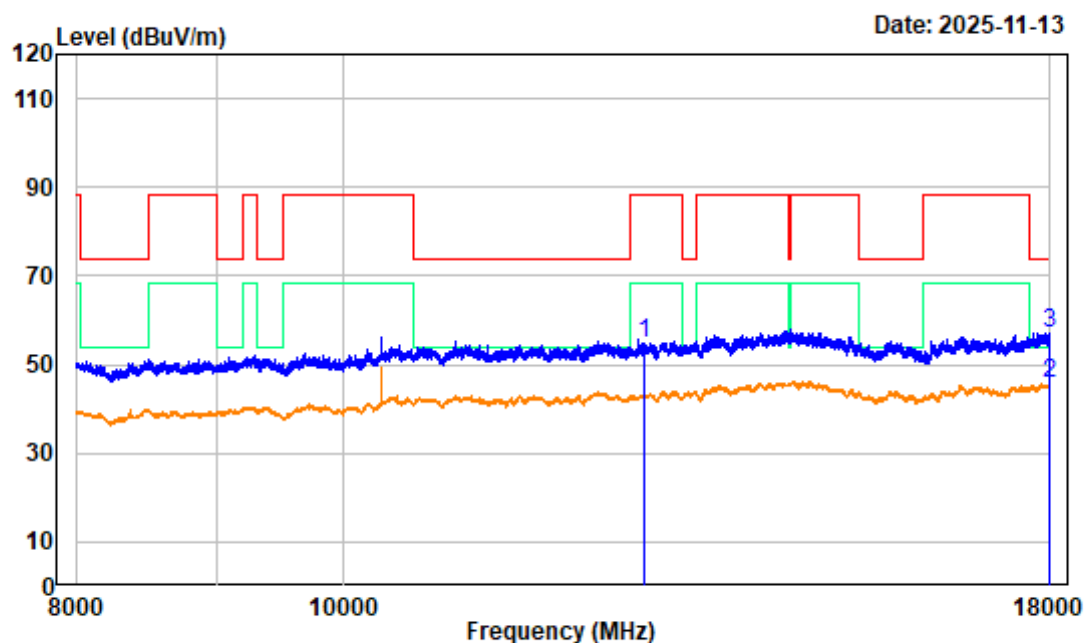

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 High Channel 6415MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

			Read	Limit	Over	
Freq	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 12830.000	6.50	48.09	54.59	88.20	-33.61	peak
2 17998.750	8.45	37.07	45.52	54.00	-8.48	average
3 17998.750	8.45	48.71	57.16	74.00	-16.84	peak


802.11be20 High Channel 8GHz-18GHz_VERTICAL

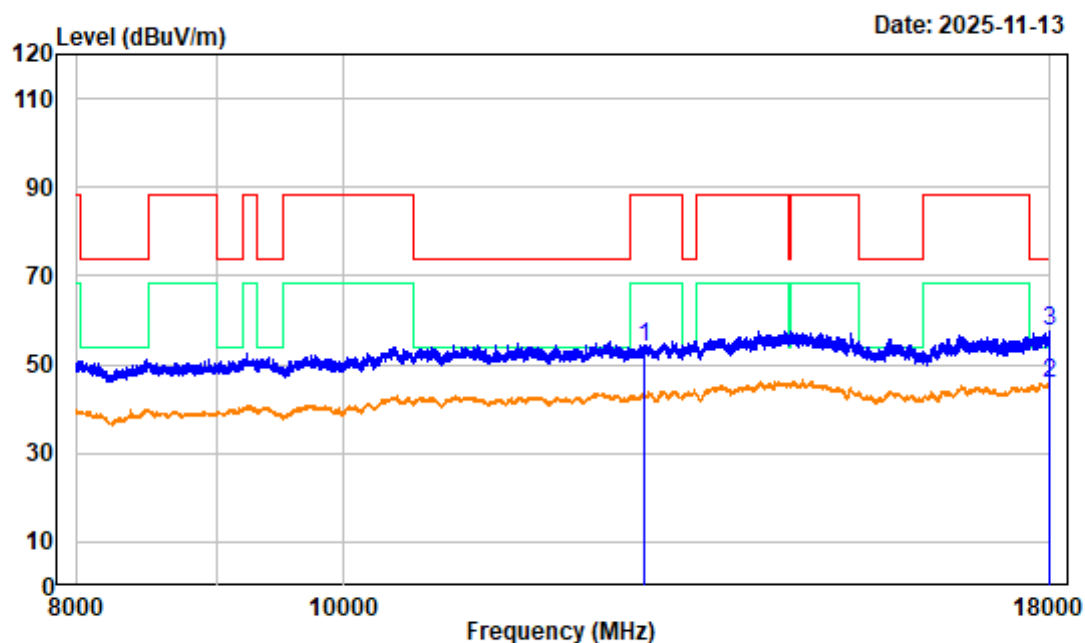

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 High Channel 6415MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

			Read	Limit	Over	
Freq	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 12830.000	6.50	47.32	53.82	88.20	-34.38	peak
2 17993.750	8.42	37.12	45.54	54.00	-8.46	average
3 17993.750	8.42	48.93	57.35	74.00	-16.65	peak


802.11be40 Low Channel 1GHz-8GHz_HORIZONTAL

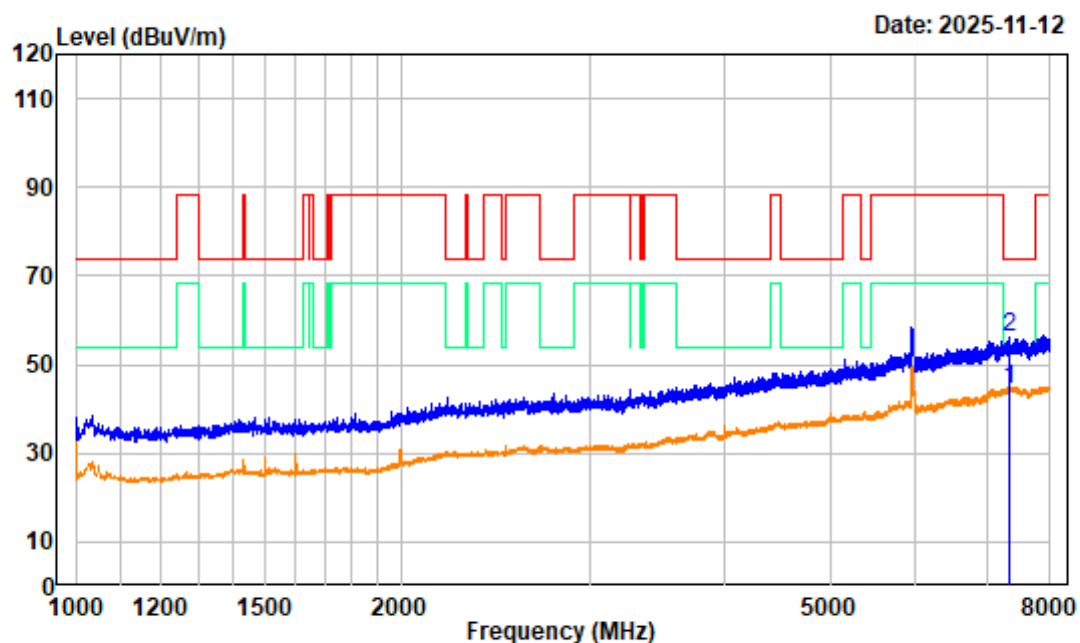

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Low Channel 5965MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7329.750	-1.18	45.49	44.31	54.00	-9.69	average
2	7329.750	-1.18	57.50	56.32	74.00	-17.68	peak


802.11be40 Low Channel 1GHz-8GHz_VERTICAL

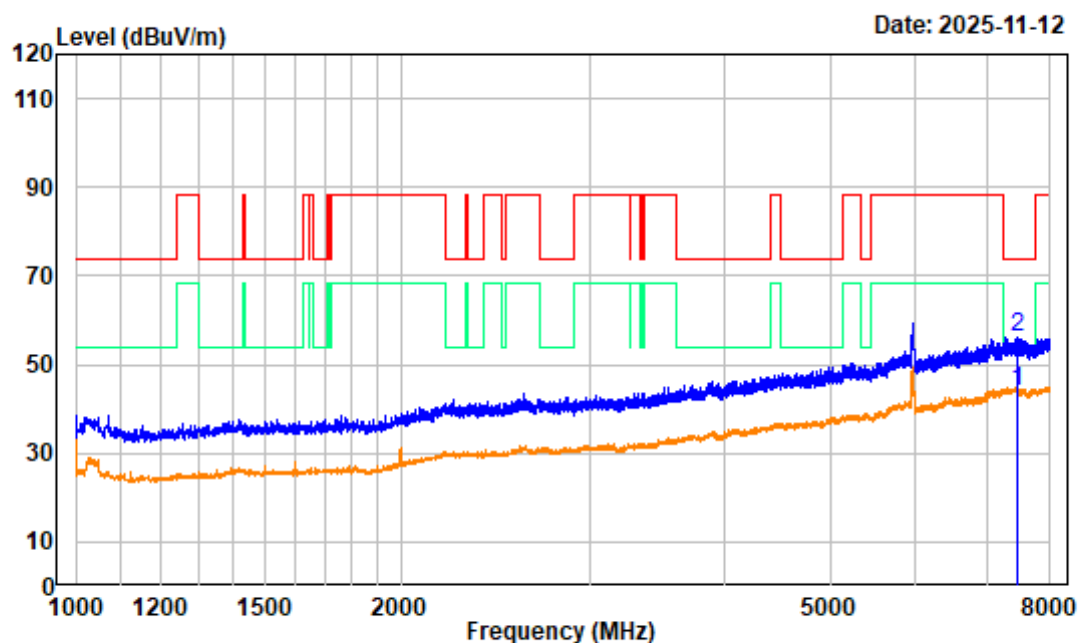

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Low Channel 5965MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7453.125	-0.89	44.97	44.08	54.00	-9.92	average
2	7453.125	-0.89	56.95	56.06	74.00	-17.94	peak


802.11be40 Low Channel 8GHz-18GHz_HORIZONTAL

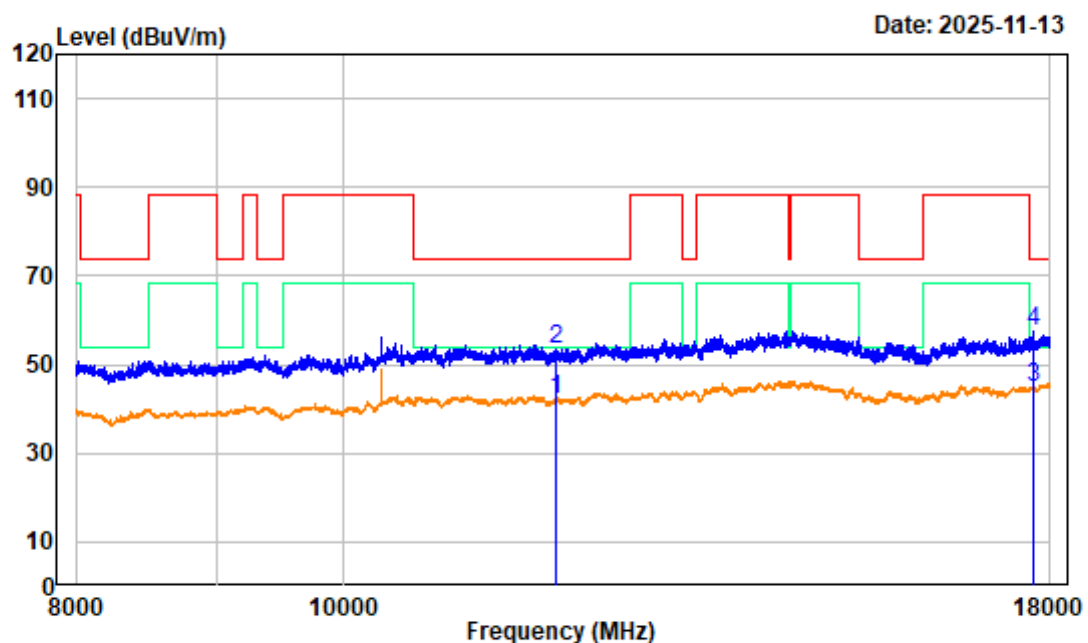

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Low Channel 5965MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11930.000	5.03	36.88	41.91	54.00	-12.09	average
2	11930.000	5.03	48.18	53.21	74.00	-20.79	peak
3	17753.750	7.75	37.03	44.78	54.00	-9.22	Average
4	17753.750	7.75	49.61	57.36	74.00	-16.64	peak


802.11be40 Low Channel 8GHz-18GHz_VERTICAL

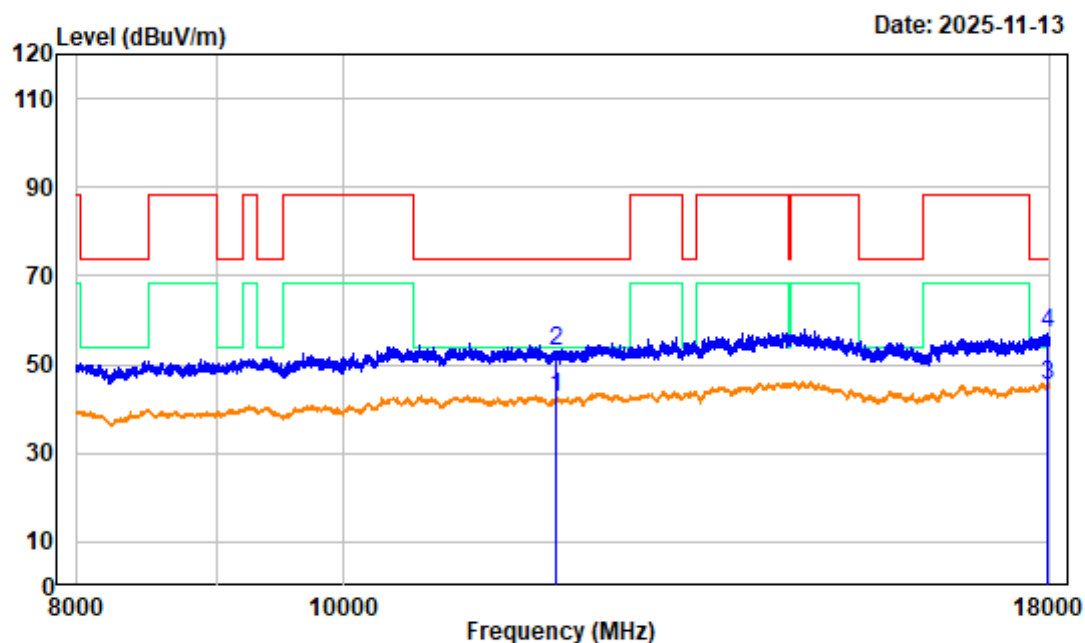

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Low Channel 5965MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz		dBuV	dBuV/m	dBuV/m	dB	
1	11930.000	5.03	37.31	42.34	54.00	-11.66	average
2	11930.000	5.03	47.87	52.90	74.00	-21.10	peak
3	17963.750	8.24	37.01	45.25	54.00	-8.75	average
4	17963.750	8.24	48.79	57.03	74.00	-16.97	peak


802.11be40 Middle Channel 1GHz-8GHz_HORIZONTAL

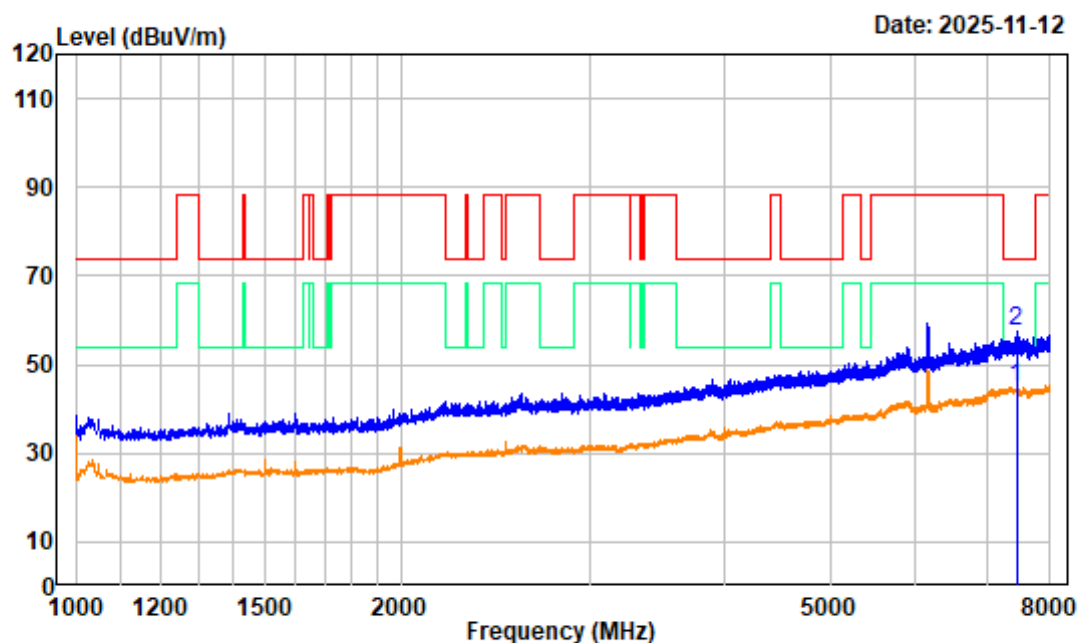

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Middle Channel 6165MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7446.125	-0.93	45.57	44.64	54.00	-9.36	average
2	7446.125	-0.93	58.59	57.66	74.00	-16.34	peak


802.11be40 Middle Channel 1GHz-8GHz_VERTICAL

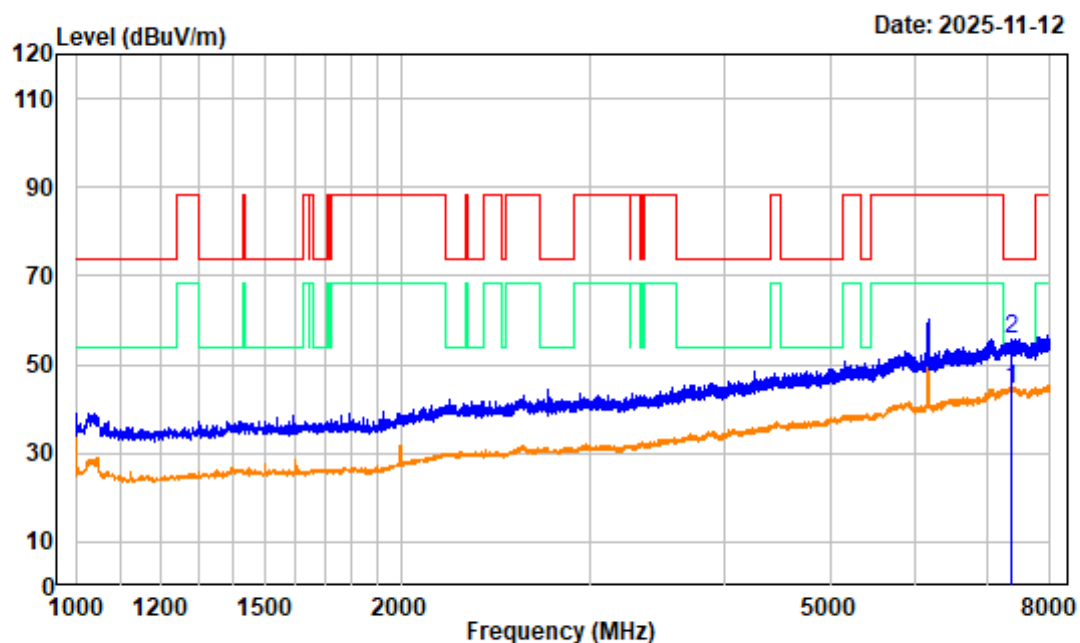

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Middle Channel 6165MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7361.250	-1.27	45.81	44.54	54.00	-9.46	average
2	7361.250	-1.27	56.98	55.71	74.00	-18.29	peak


802.11be40 Middle Channel 8GHz-18GHz_HORIZONTAL

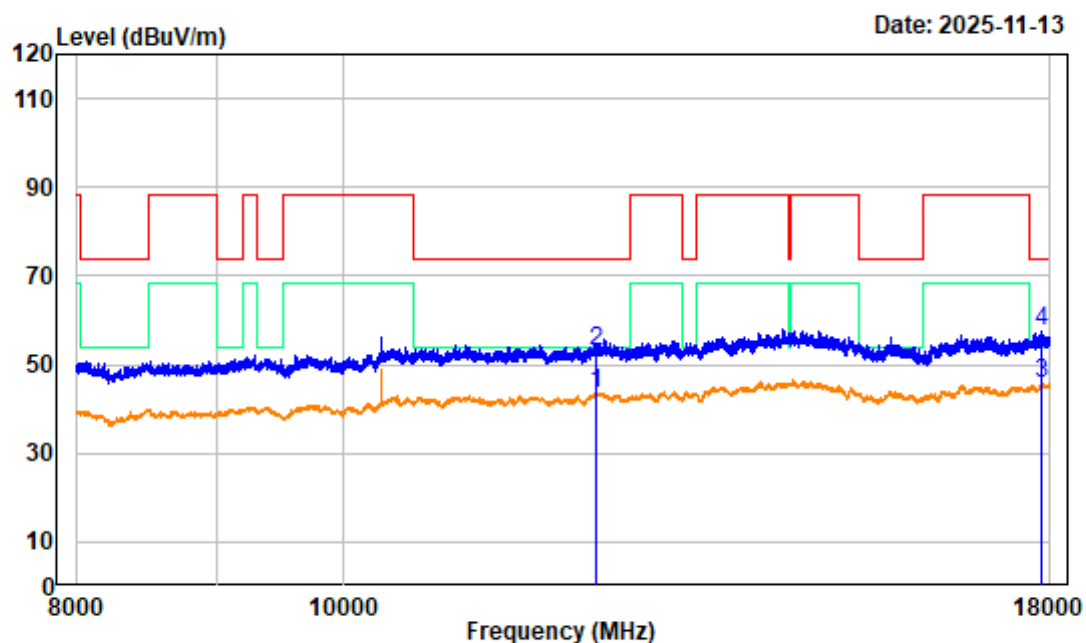

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Middle Channel 6165MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12330.000	6.60	36.98	43.58	54.00	-10.42	Average
2	12330.000	6.60	46.38	52.98	74.00	-21.02	Peak
3	17867.500	8.30	37.35	45.65	54.00	-8.35	average
4	17867.500	8.30	49.37	57.67	74.00	-16.33	peak


802.11be40 Middle Channel 8GHz-18GHz_VERTICAL

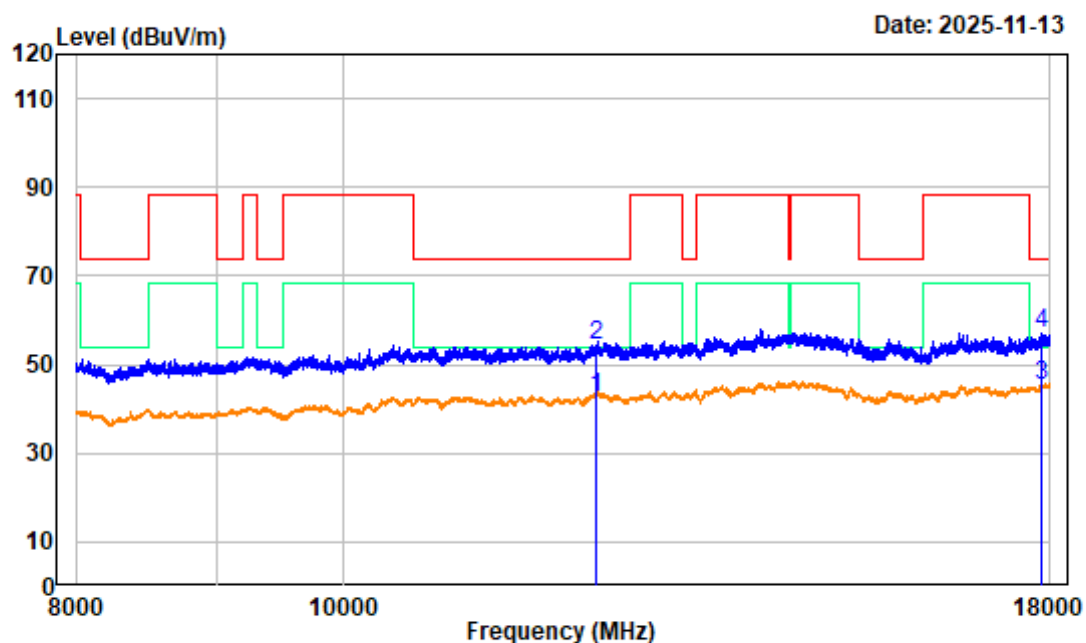

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Middle Channel 6165MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12330.000	6.60	36.08	42.68	54.00	-11.32	average
2	12330.000	6.60	47.69	54.29	74.00	-19.71	peak
3	17882.500	8.28	36.93	45.21	54.00	-8.79	Average
4	17882.500	8.28	48.85	57.13	74.00	-16.87	peak


802.11be40 High Channel 1GHz-8GHz_HORIZONTAL

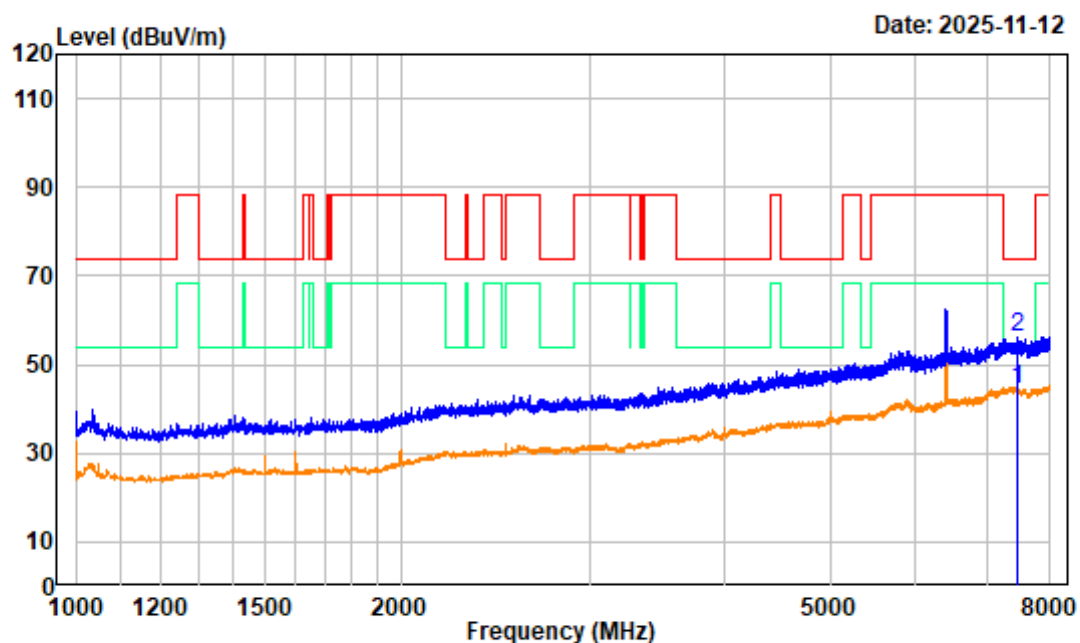

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 High Channel 6405MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7458.375	-0.89	45.16	44.27	54.00	-9.73	average
2	7458.375	-0.89	56.84	55.95	74.00	-18.05	peak


802.11be40 High Channel 1GHz-8GHz_VERTICAL

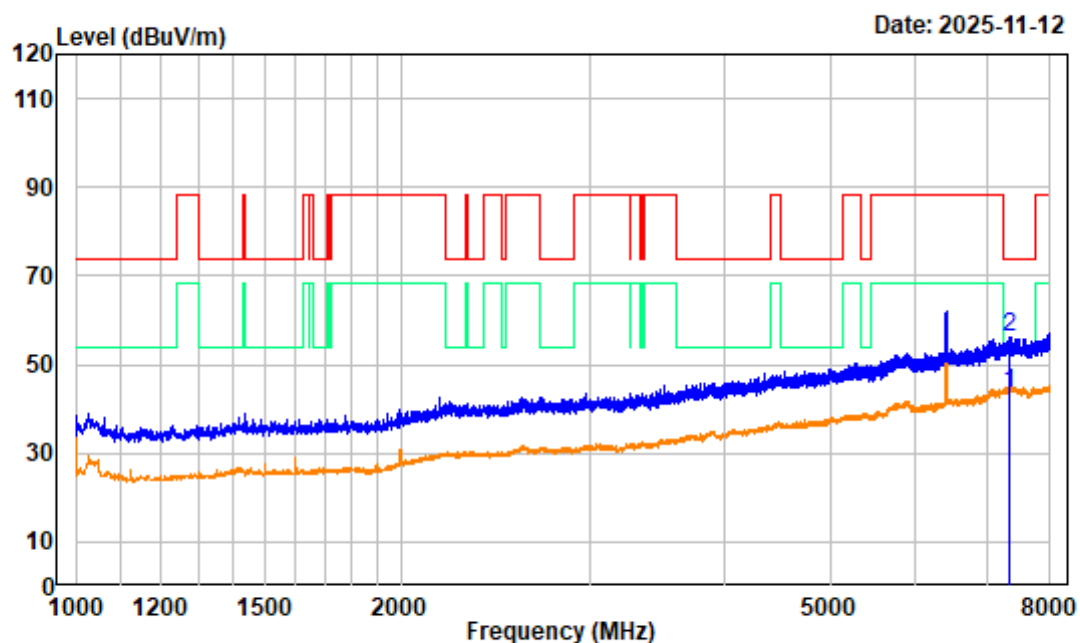

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 High Channel 6405MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7327.125	-1.18	44.59	43.41	54.00	-10.59	average
2	7327.125	-1.18	57.52	56.34	74.00	-17.66	peak


802.11be40 High Channel 8GHz-18GHz_HORIZONTAL

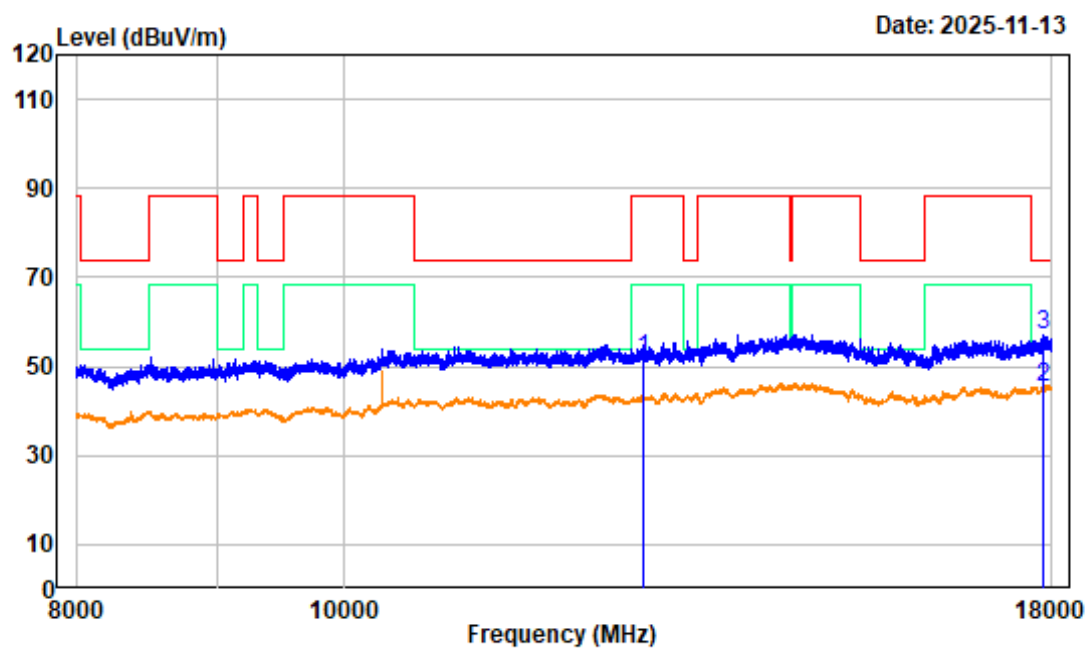

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 High Channel 6405MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12810.000	6.54	45.10	51.64	88.20	-36.56	Peak
2	17883.750	8.28	37.06	45.34	54.00	-8.66	average
3	17883.750	8.28	48.73	57.01	74.00	-16.99	peak

802.11be40 High Channel 8GHz-18GHz_VERTICAL

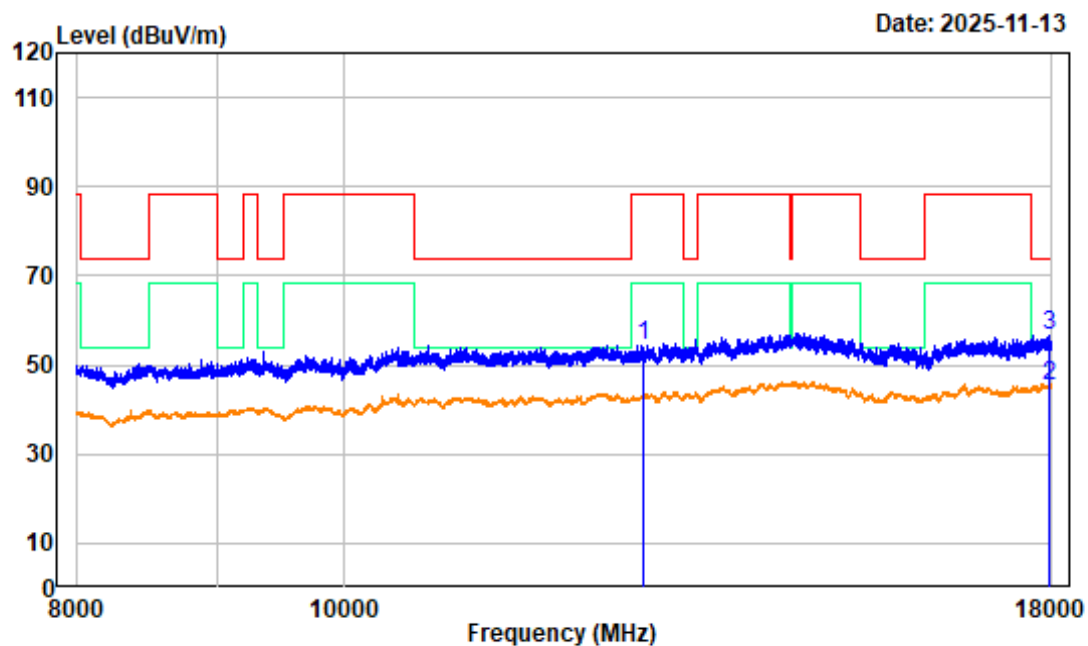

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504Z00193E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : 802.11be40 High Channel 6405MHz 8GHz-18GHz

SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12810.000	6.54	47.73	54.27	88.20	-33.93	peak
2	17970.000	8.28	36.98	45.26	54.00	-8.74	average
3	17970.000	8.28	48.47	56.75	74.00	-17.25	peak


802.11be80 Low Channel 1GHz-8GHz_HORIZONTAL

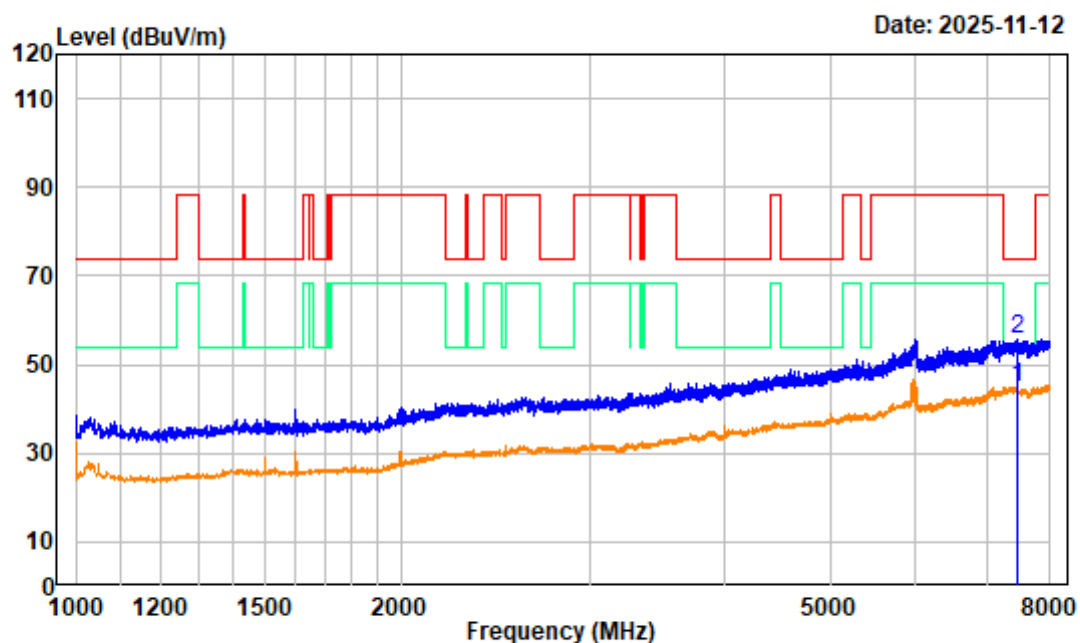

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Low Channel 5985MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7468.875	-0.91	45.59	44.68	54.00	-9.32	average
2	7468.875	-0.91	56.61	55.70	74.00	-18.30	peak


802.11be80 Low Channel 1GHz-8GHz_VERTICAL

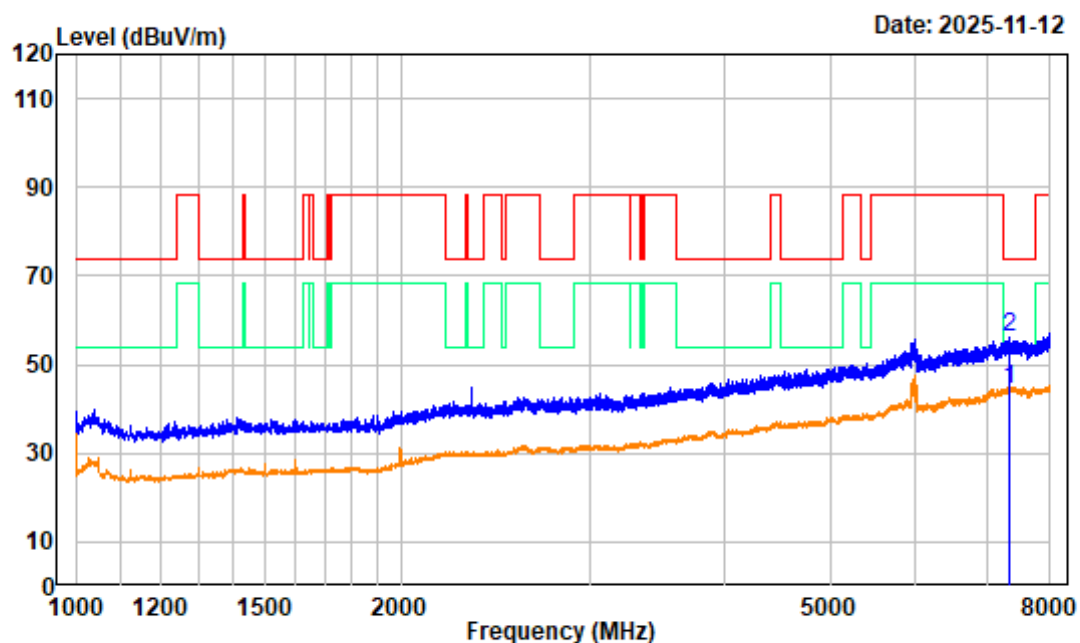

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Low Channel 5985MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7326.250	-1.18	45.42	44.24	54.00	-9.76	average
2	7326.250	-1.18	57.15	55.97	74.00	-18.03	peak


802.11be80 Low Channel 8GHz-18GHz_HORIZONTAL

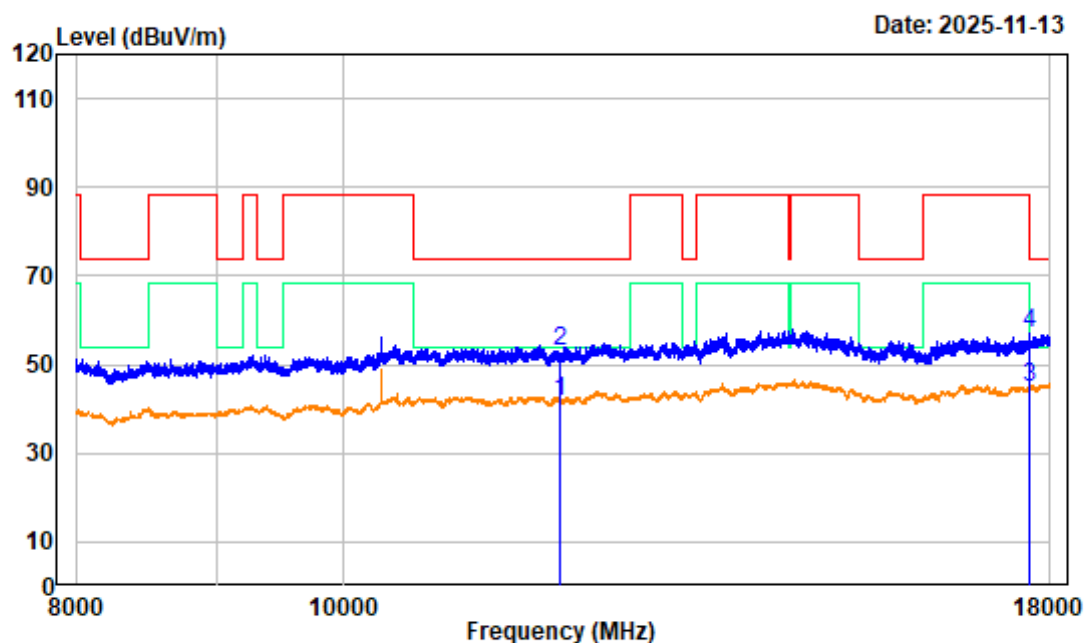

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Low Channel 5985MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11970.000	5.17	36.68	41.85	54.00	-12.15	average
2	11970.000	5.17	47.88	53.05	74.00	-20.95	peak
3	17700.000	7.65	37.07	44.72	54.00	-9.28	average
4	17700.000	7.65	49.18	56.83	74.00	-17.17	peak


802.11be80 Low Channel 8GHz-18GHz_VERTICAL

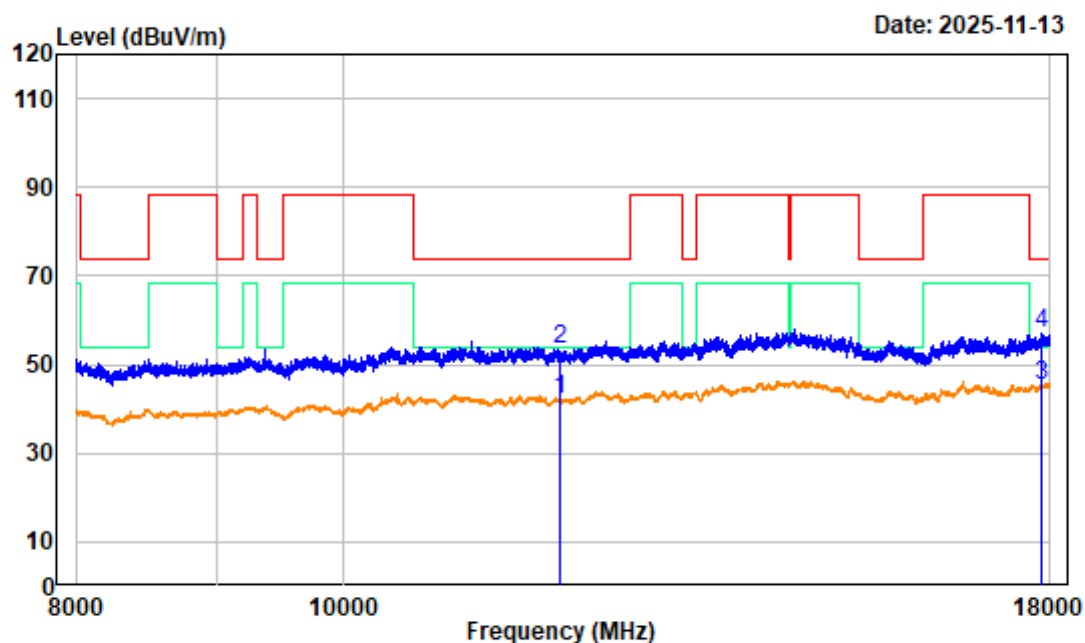

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Low Channel 5985MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11970.000	5.17	36.76	41.93	54.00	-12.07	average
2	11970.000	5.17	48.39	53.56	74.00	-20.44	peak
3	17880.000	8.28	36.84	45.12	54.00	-8.88	average
4	17880.000	8.28	48.64	56.92	74.00	-17.08	peak


802.11be80 Middle Channel 1GHz-8GHz_HORIZONTAL

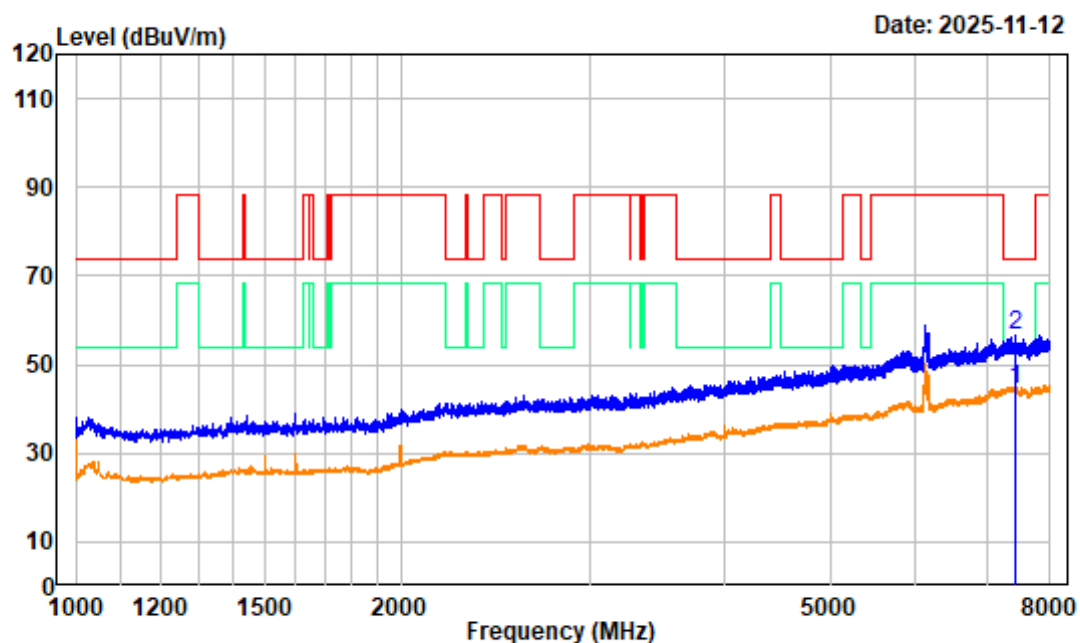

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Middle Channel 6145MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7421.625	-1.13	45.44	44.31	54.00	-9.69	average
2	7421.625	-1.13	57.52	56.39	74.00	-17.61	peak

802.11be80 Middle Channel 1GHz-8GHz_VERTICAL

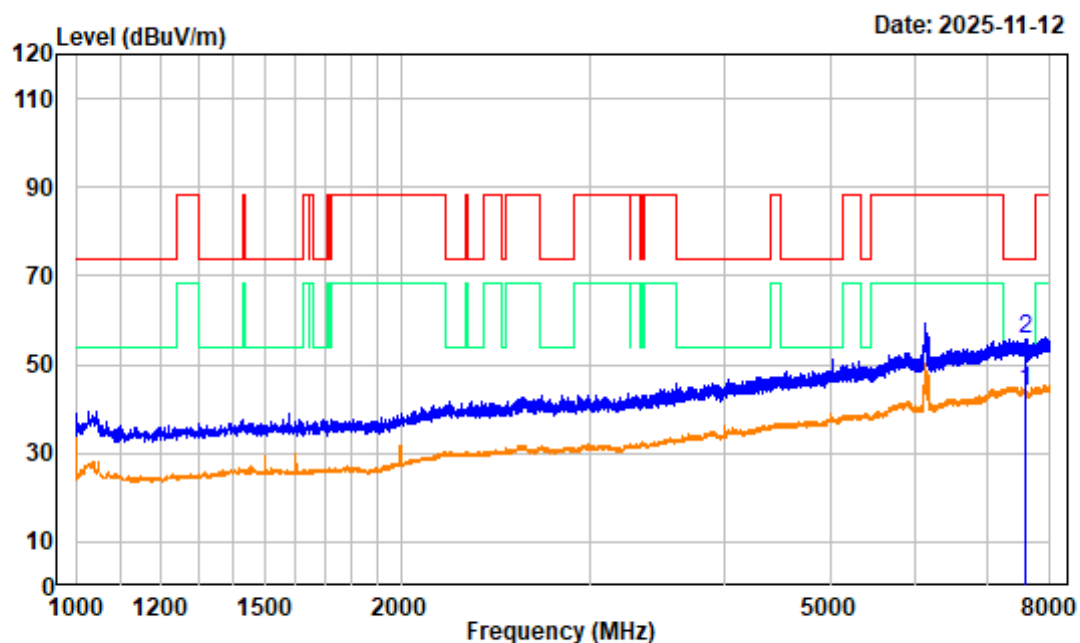

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504Z00193E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : 802.11be80 Middle Channel 6145MHz 1GHz-8GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7586.125	-1.20	45.20	44.00	54.00	-10.00	average
2	7586.125	-1.20	56.88	55.68	74.00	-18.32	peak


802.11be80 Middle Channel 8GHz-18GHz_HORIZONTAL

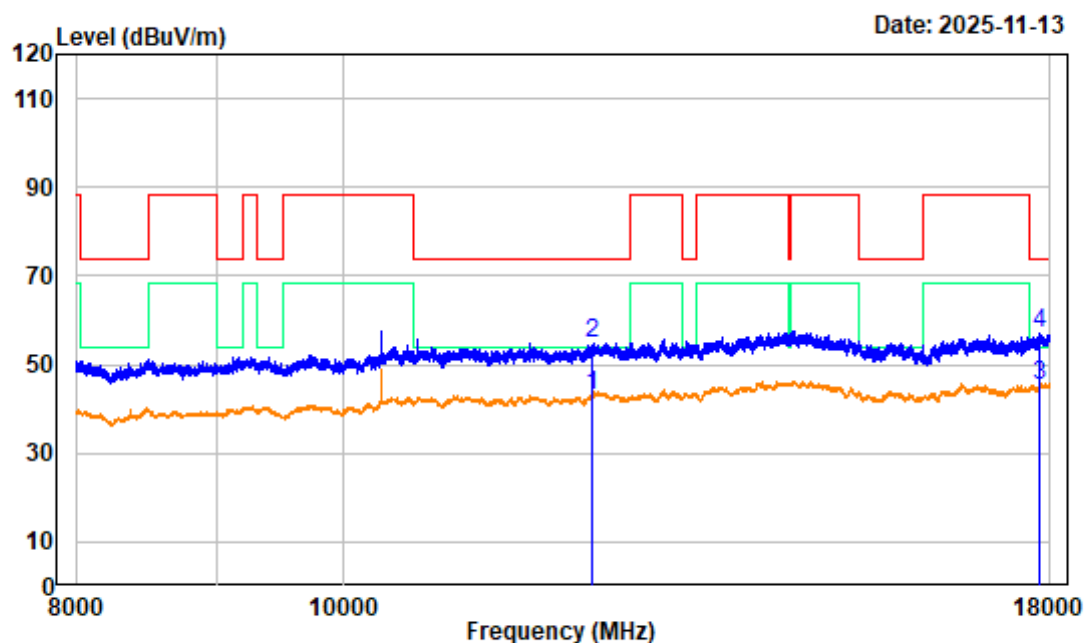

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Middle Channel 6145MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12290.000	6.57	36.49	43.06	54.00	-10.94	average
2	12290.000	6.57	48.11	54.68	74.00	-19.32	peak
3	17856.250	8.31	36.92	45.23	54.00	-8.77	average
4	17856.250	8.31	48.87	57.18	74.00	-16.82	peak


802.11be80 Middle Channel 8GHz-18GHz_VERTICAL

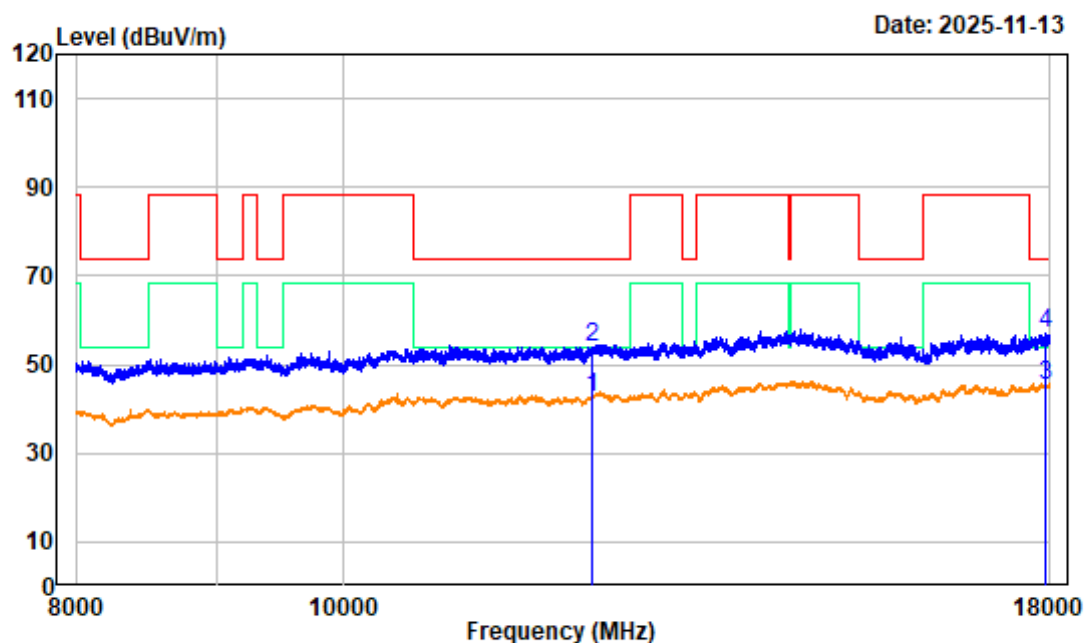

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Middle Channel 6145MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12290.000	6.57	35.86	42.43	54.00	-11.57	average
2	12290.000	6.57	47.40	53.97	74.00	-20.03	peak
3	17918.750	8.22	37.09	45.31	54.00	-8.69	average
4	17918.750	8.22	48.78	57.00	74.00	-17.00	peak


802.11be80 High Channel 1GHz-8GHz_HORIZONTAL

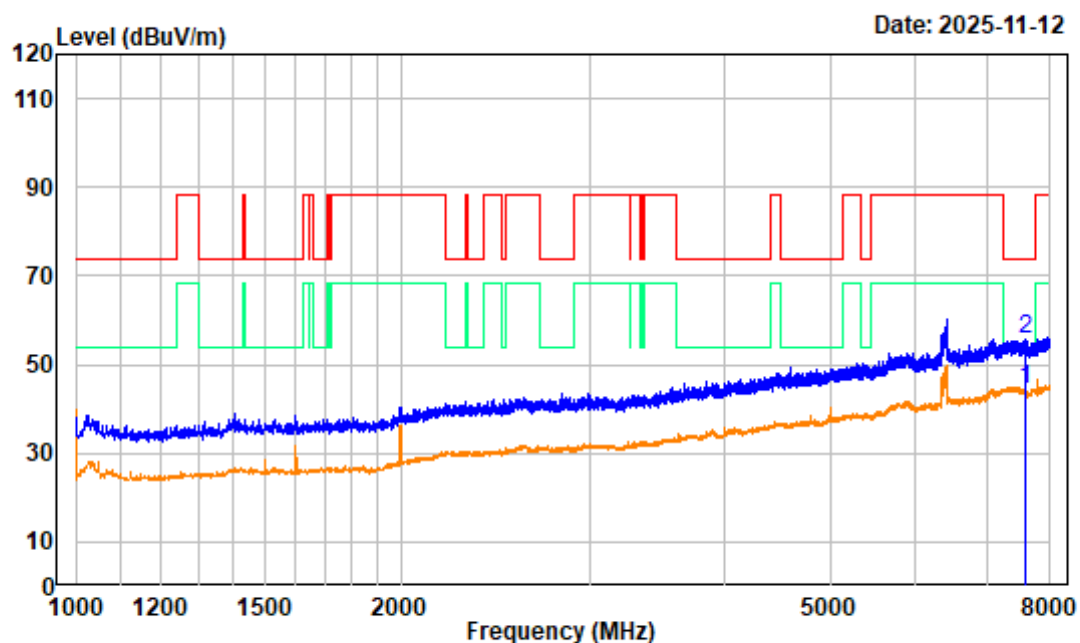

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 High Channel 6385MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7584.375	-1.19	45.59	44.40	54.00	-9.60	average
2	7584.375	-1.19	56.73	55.54	74.00	-18.46	peak


802.11be80 High Channel 1GHz-8GHz_VERTICAL

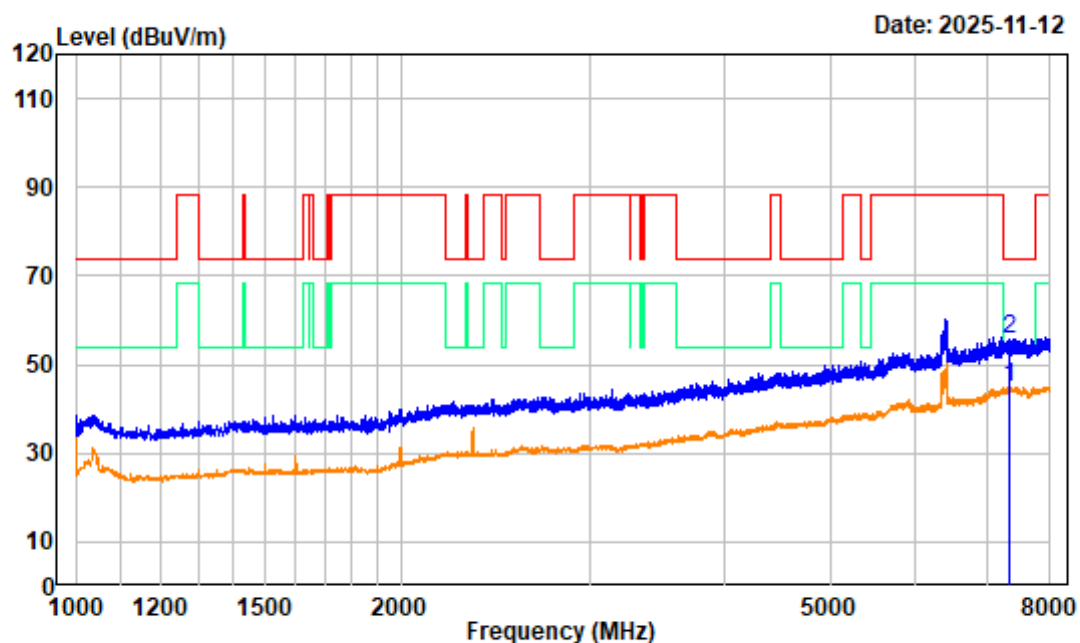

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 High Channel 6385MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7321.875	-1.17	45.78	44.61	54.00	-9.39	average
2	7321.875	-1.17	56.98	55.81	74.00	-18.19	peak


802.11be80 High Channel 8GHz-18GHz_HORIZONTAL

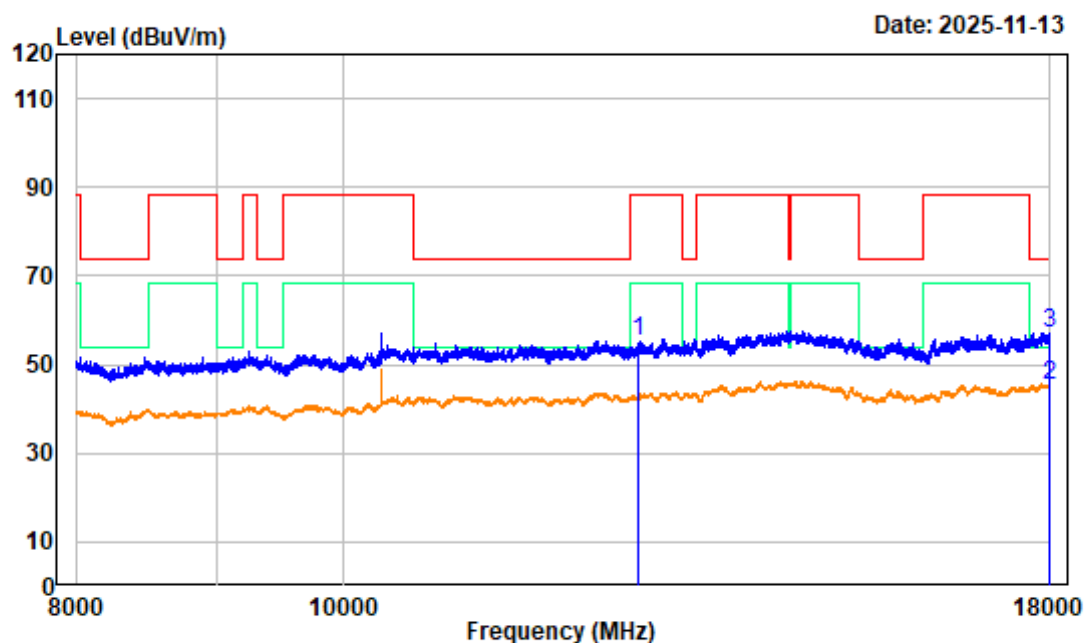

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 High Channel 6385MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12770.000	6.29	48.96	55.25	88.20	-32.95	peak
2	17998.750	8.45	36.84	45.29	54.00	-8.71	average
3	17998.750	8.45	48.61	57.06	74.00	-16.94	peak


802.11be80 High Channel 8GHz-18GHz_VERTICAL

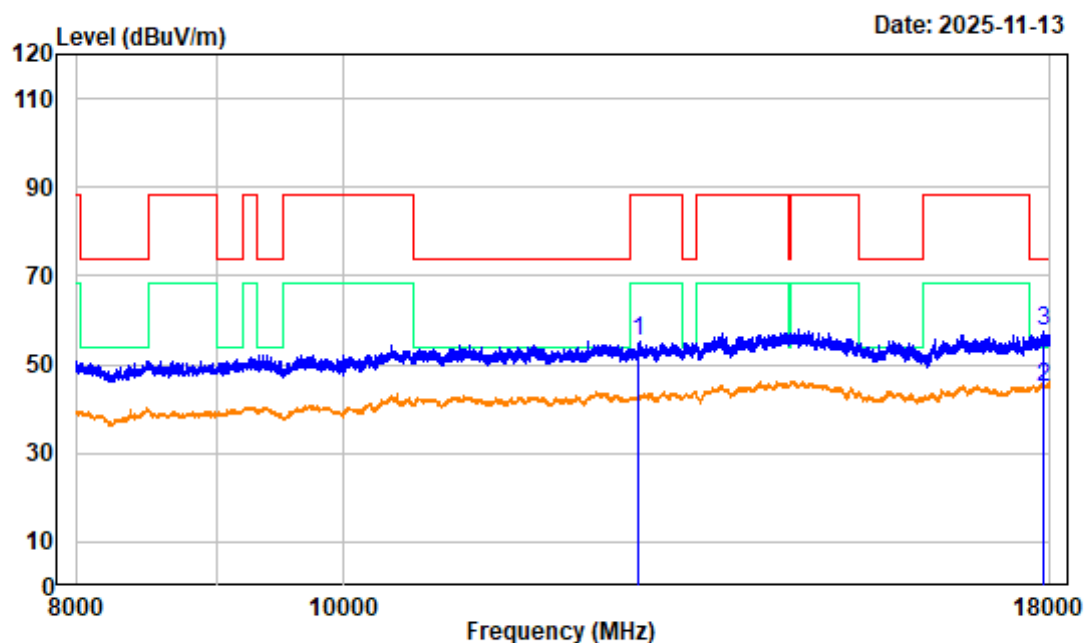

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 High Channel 6385MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12770.000	6.29	49.06	55.35	88.20	-32.85	peak
2	17911.250	8.24	36.54	44.78	54.00	-9.22	average
3	17911.250	8.24	49.12	57.36	74.00	-16.64	peak


802.11be160 Low Channel 1GHz-8GHz_HORIZONTAL

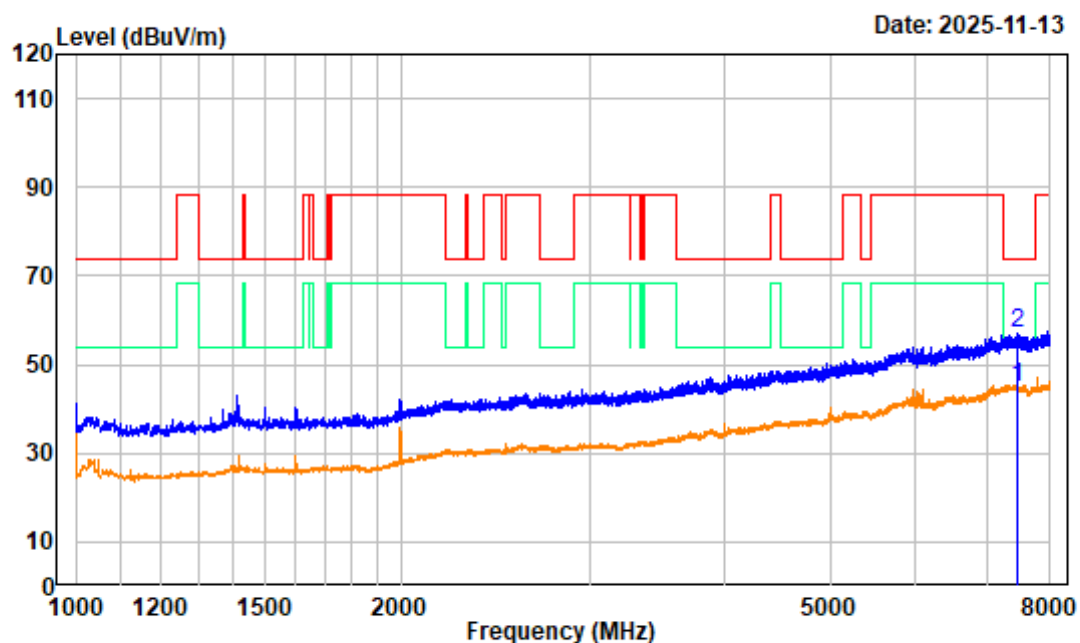

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Low Channel 6025MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7465.375	-0.90	45.54	44.64	54.00	-9.36	average
2	7465.375	-0.90	57.84	56.94	74.00	-17.06	peak


802.11be160 Low Channel 1GHz-8GHz_VERTICAL

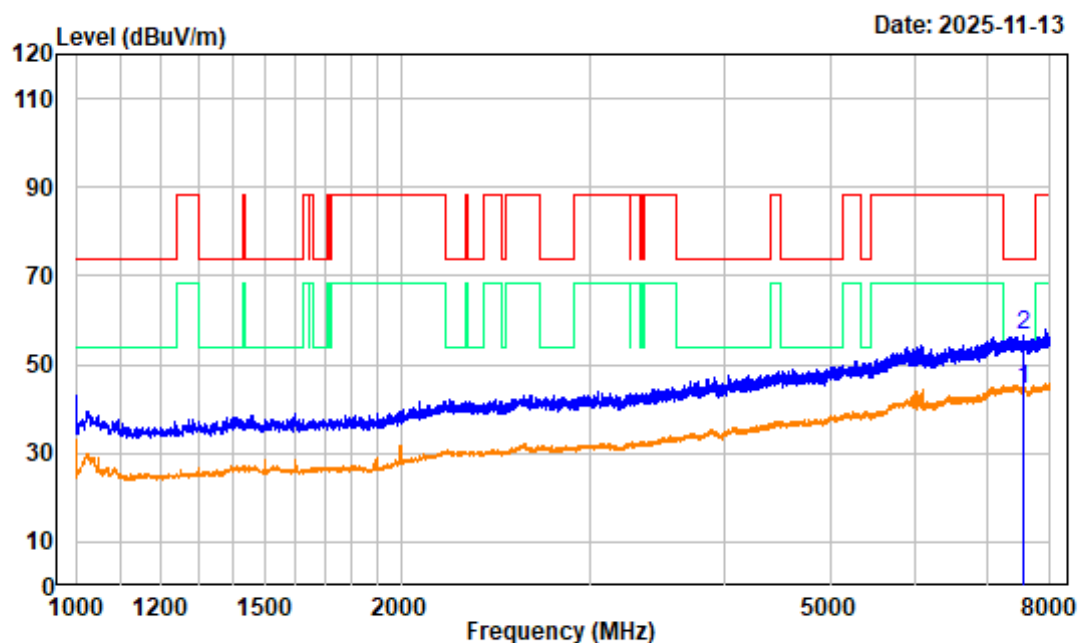

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Low Channel 6025MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7564.250	-1.05	45.53	44.48	54.00	-9.52	average
2	7564.250	-1.05	57.52	56.47	74.00	-17.53	peak


802.11be160 Low Channel 8GHz-18GHz_HORIZONTAL

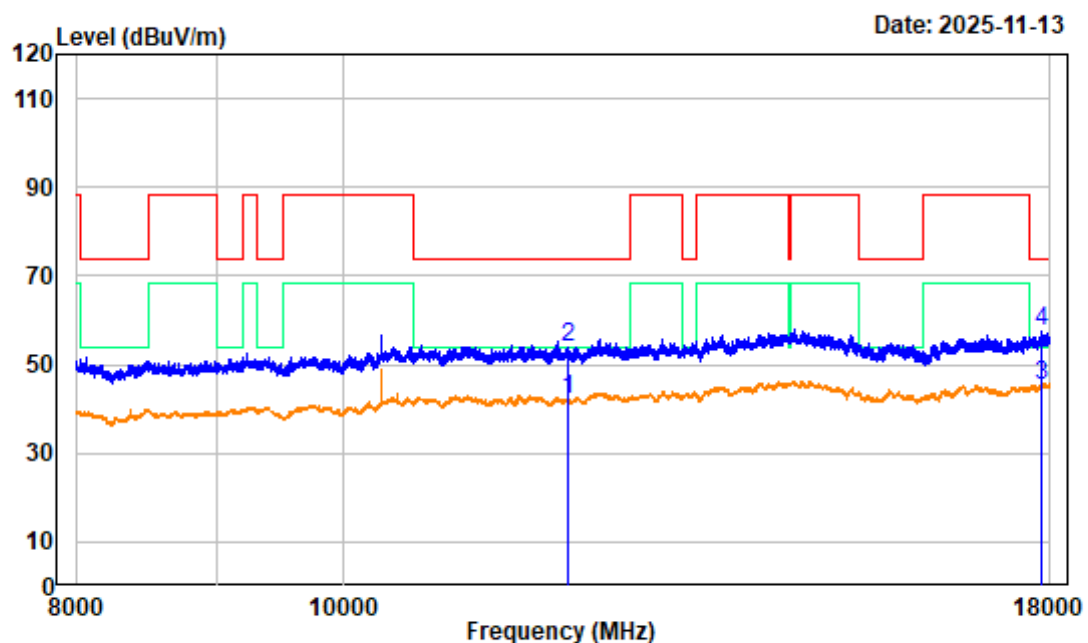

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Low Channel 6025MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12050.000	5.39	36.81	42.20	54.00	-11.80	average
2	12050.000	5.39	48.46	53.85	74.00	-20.15	peak
3	17880.000	8.28	36.95	45.23	54.00	-8.77	average
4	17880.000	8.28	49.00	57.28	74.00	-16.72	peak


802.11be160 Low Channel 8GHz-18GHz_VERTICAL

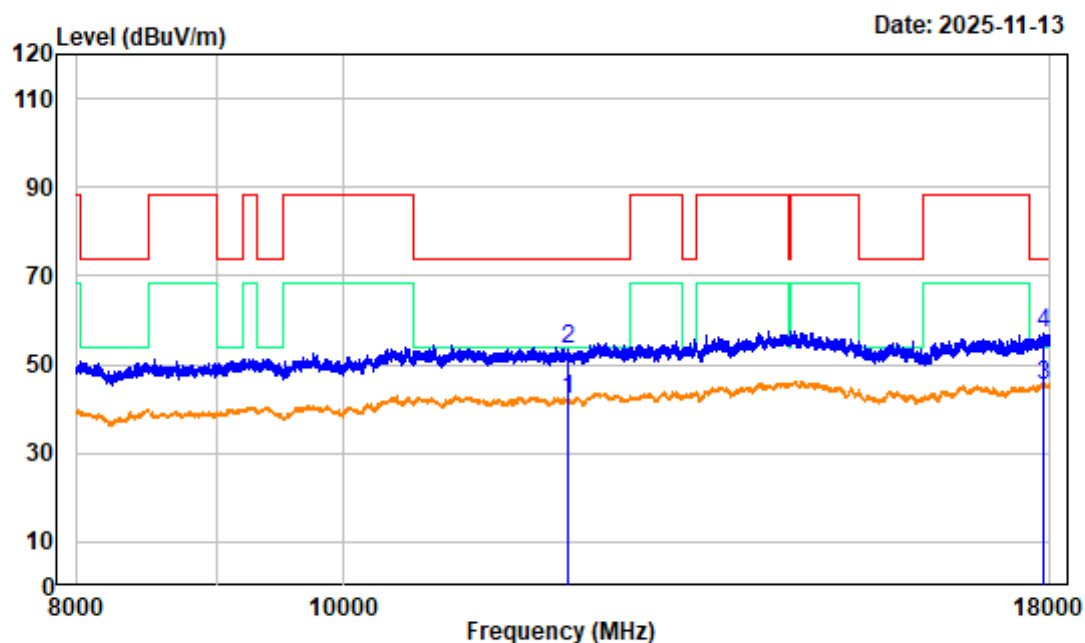

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Low Channel 6025MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12050.000	5.39	36.58	41.97	54.00	-12.03	average
2	12050.000	5.39	48.07	53.46	74.00	-20.54	peak
3	17908.750	8.24	36.92	45.16	54.00	-8.84	average
4	17908.750	8.24	48.82	57.06	74.00	-16.94	peak


802.11be160 Middle Channel 1GHz-8GHz_HORIZONTAL

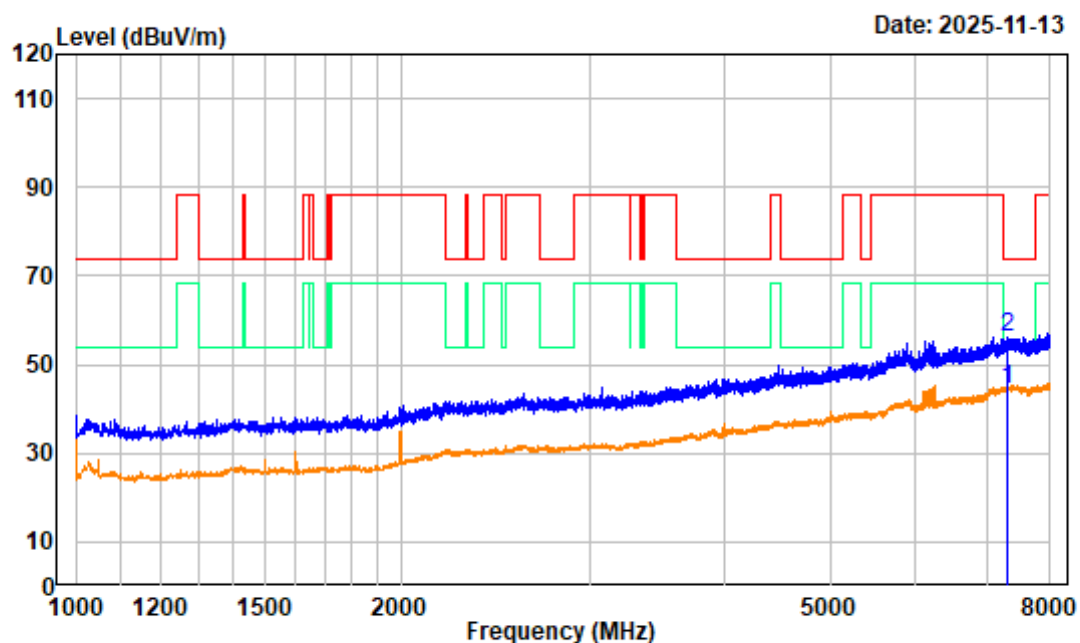

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Middle Channel 6185MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7303.500	-1.10	45.41	44.31	54.00	-9.69	average
2	7303.500	-1.10	57.18	56.08	74.00	-17.92	peak


802.11be160 Middle Channel 1GHz-8GHz_VERTICAL

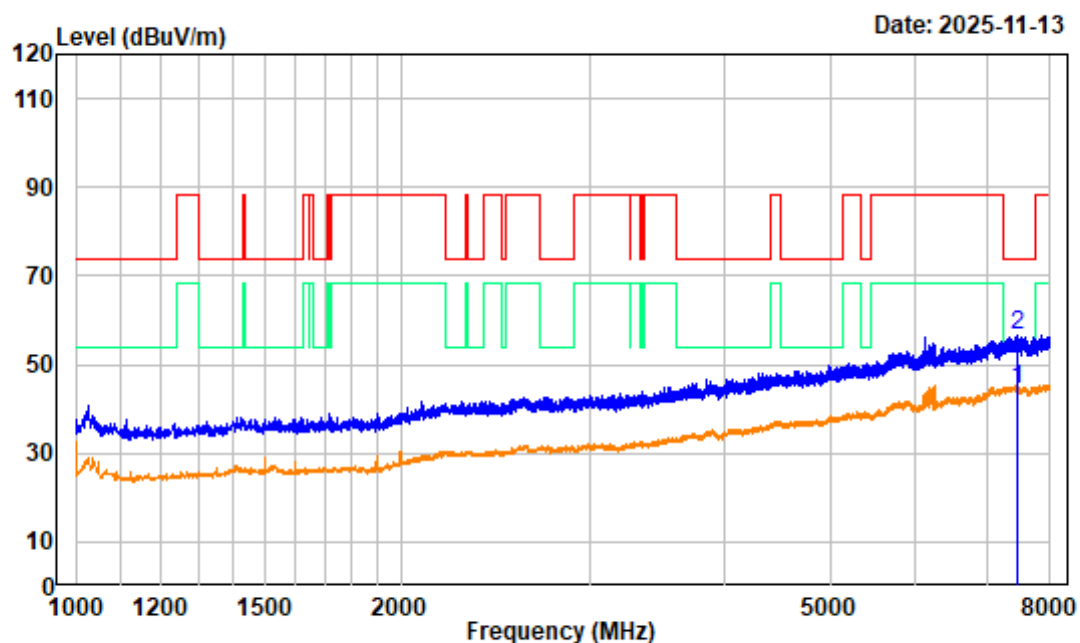

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Middle Channel 6185MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7454.000	-0.90	45.40	44.50	54.00	-9.50	average
2	7454.000	-0.90	57.48	56.58	74.00	-17.42	peak


802.11be160 Middle Channel 8GHz-18GHz_HORIZONTAL

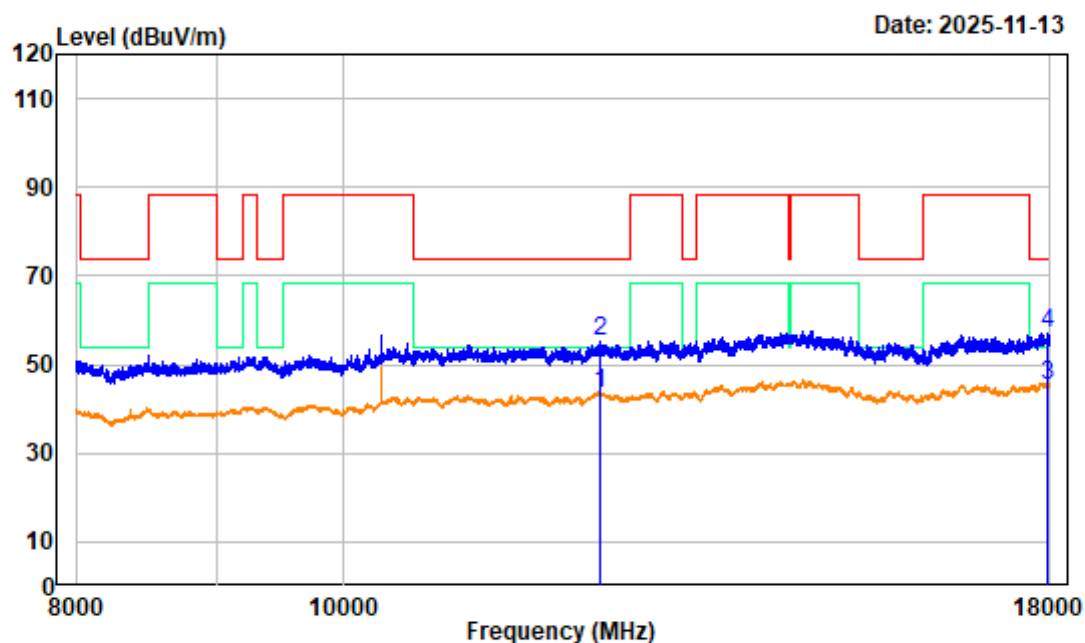

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Middle Channel 6185MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12370.000	6.30	37.03	43.33	54.00	-10.67	average
2	12370.000	6.30	48.80	55.10	74.00	-18.90	peak
3	17960.000	8.22	37.06	45.28	54.00	-8.72	average
4	17960.000	8.22	48.70	56.92	74.00	-17.08	peak

802.11be160 Middle Channel 8GHz-18GHz_VERTICAL

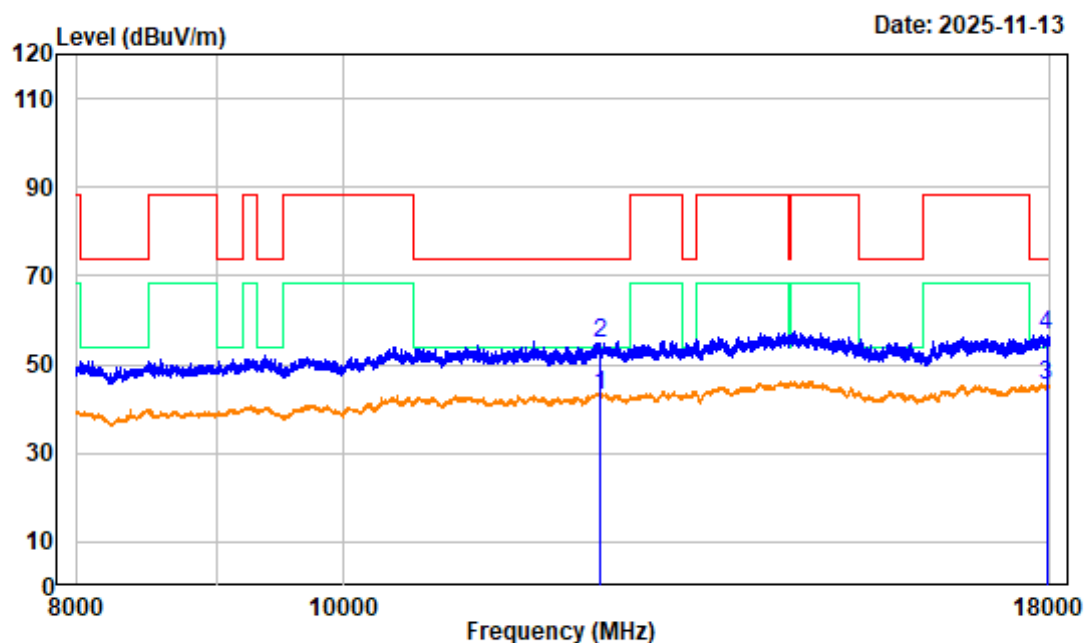

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504Z00193E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : 802.11be160 Middle Channel 6185MHz 8GHz-18GHz

SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12370.000	6.30	36.86	43.16	54.00	-10.84	average
2	12370.000	6.30	48.62	54.92	74.00	-19.08	peak
3	17947.500	8.16	36.94	45.10	54.00	-8.90	average
4	17947.500	8.16	48.62	56.78	74.00	-17.22	peak


802.11be160 High Channel 1GHz-8GHz_HORIZONTAL

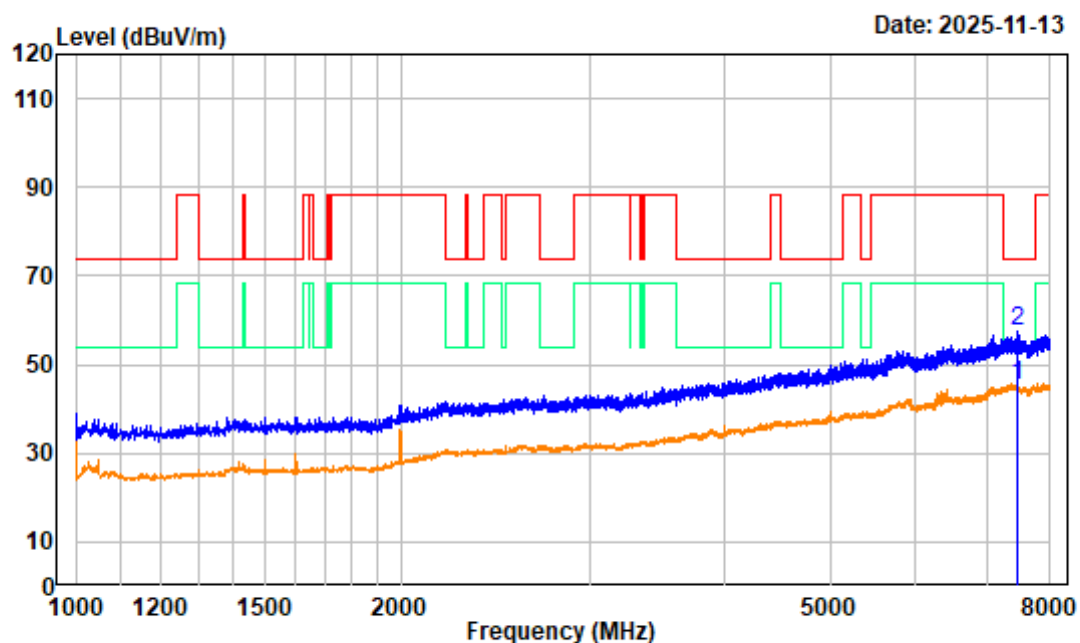

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 High Channel 6345MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7456.625	-0.90	46.21	45.31	54.00	-8.69	average
2	7456.625	-0.90	58.22	57.32	74.00	-16.68	peak


802.11be160 High Channel 1GHz-8GHz_VERTICAL

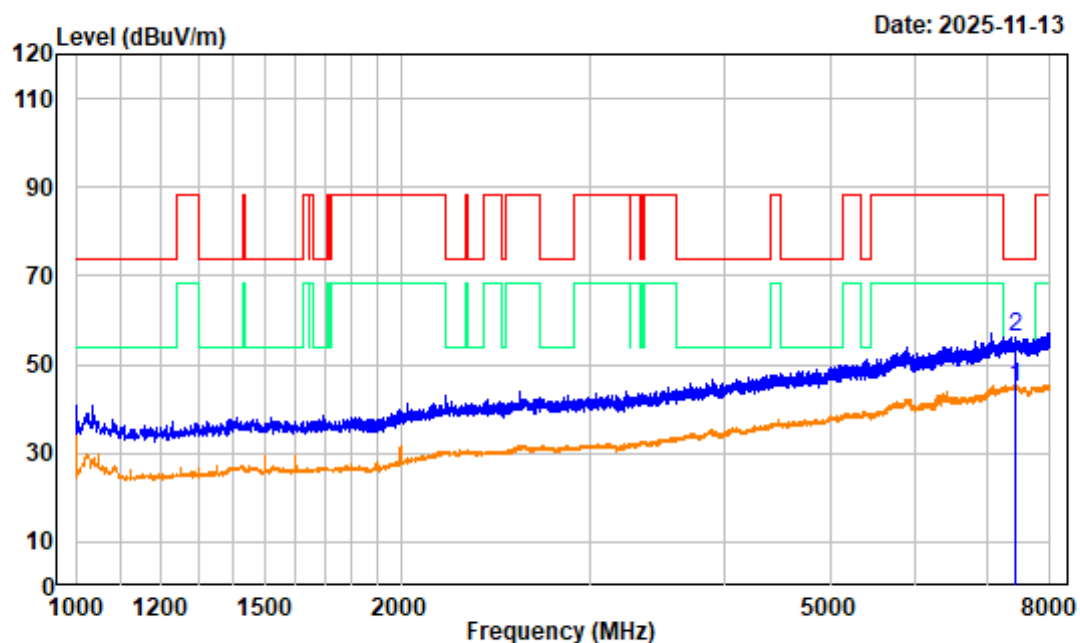

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 High Channel 6345MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7442.625	-0.96	45.66	44.70	54.00	-9.30	average
2	7442.625	-0.96	57.19	56.23	74.00	-17.77	peak


802.11be160 High Channel 8GHz-18GHz_HORIZONTAL

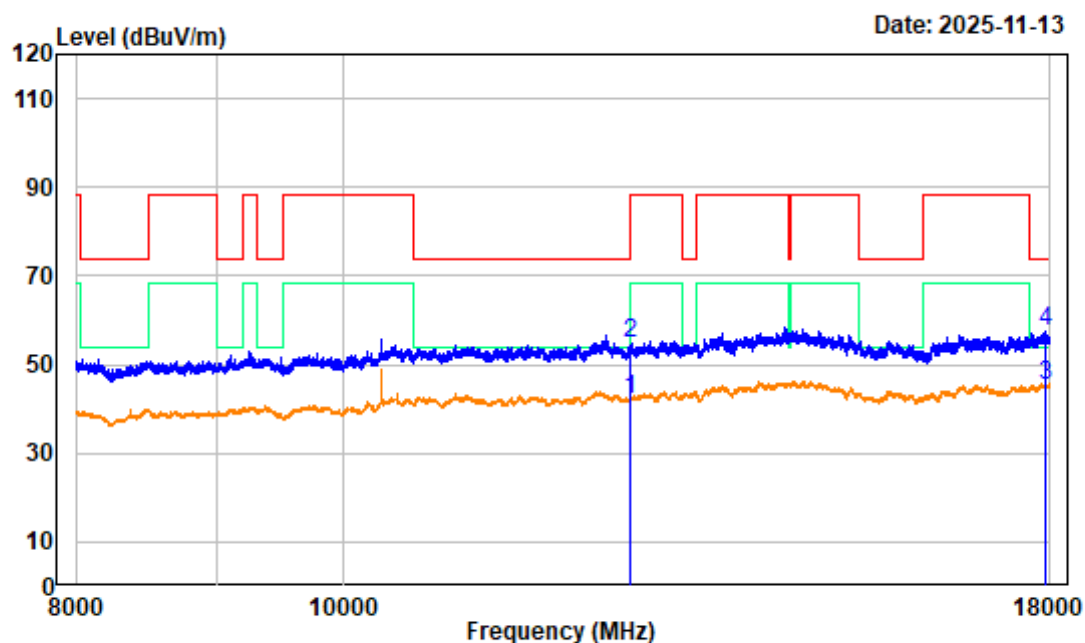

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 High Channel 6345MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12690.000	6.07	36.12	42.19	54.00	-11.81	average
2	12690.000	6.07	48.70	54.77	74.00	-19.23	peak
3	17922.500	8.22	37.17	45.39	54.00	-8.61	average
4	17922.500	8.22	49.19	57.41	74.00	-16.59	peak


802.11be160 High Channel 8GHz-18GHz_VERTICAL

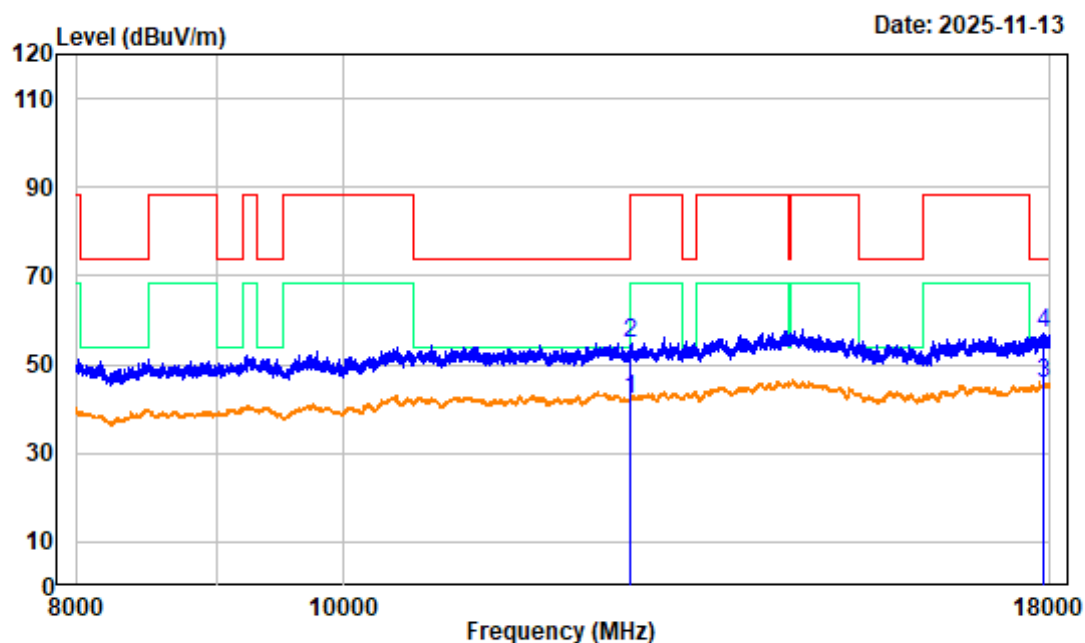

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 High Channel 6345MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12690.000	6.07	36.08	42.15	54.00	-11.85	average
2	12690.000	6.07	48.62	54.69	74.00	-19.31	peak
3	17907.500	8.25	37.29	45.54	54.00	-8.46	average
4	17907.500	8.25	48.68	56.93	74.00	-17.07	peak


802.11be320 Low Channel 1GHz-8GHz_HORIZONTAL

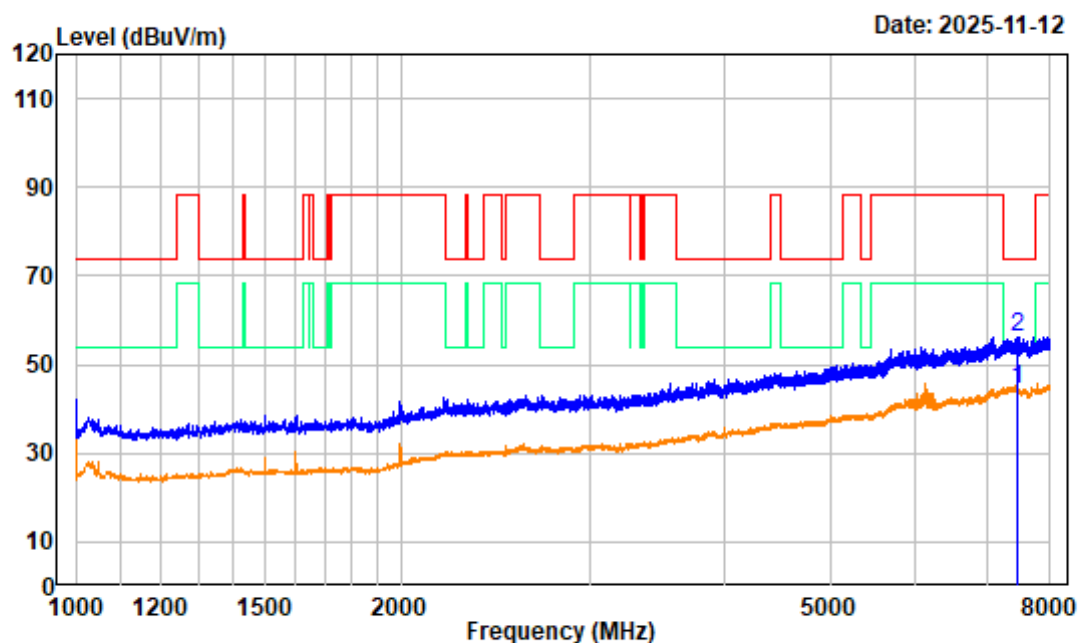

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 Low Channel 6105MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7466.250	-0.89	45.28	44.39	54.00	-9.61	average
2	7466.250	-0.89	57.25	56.36	74.00	-17.64	peak


802.11be320 Low Channel 1GHz-8GHz_VERTICAL

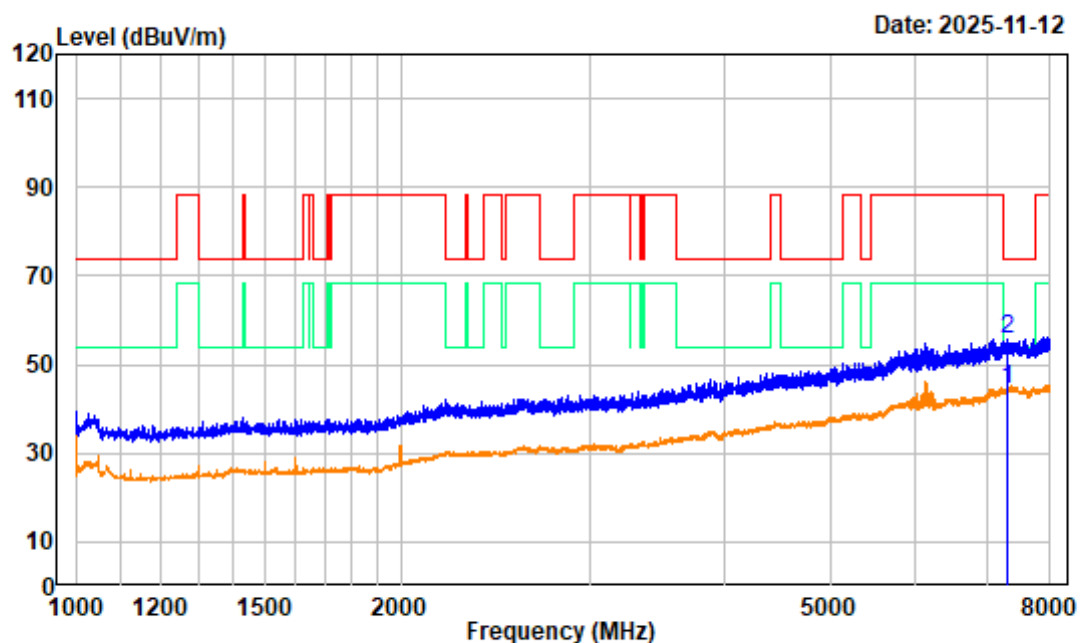

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 Low Channel 6105MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7318.375	-1.15	45.44	44.29	54.00	-9.71	average
2	7318.375	-1.15	56.86	55.71	74.00	-18.29	peak


802.11be320 Low Channel 8GHz-18GHz_HORIZONTAL

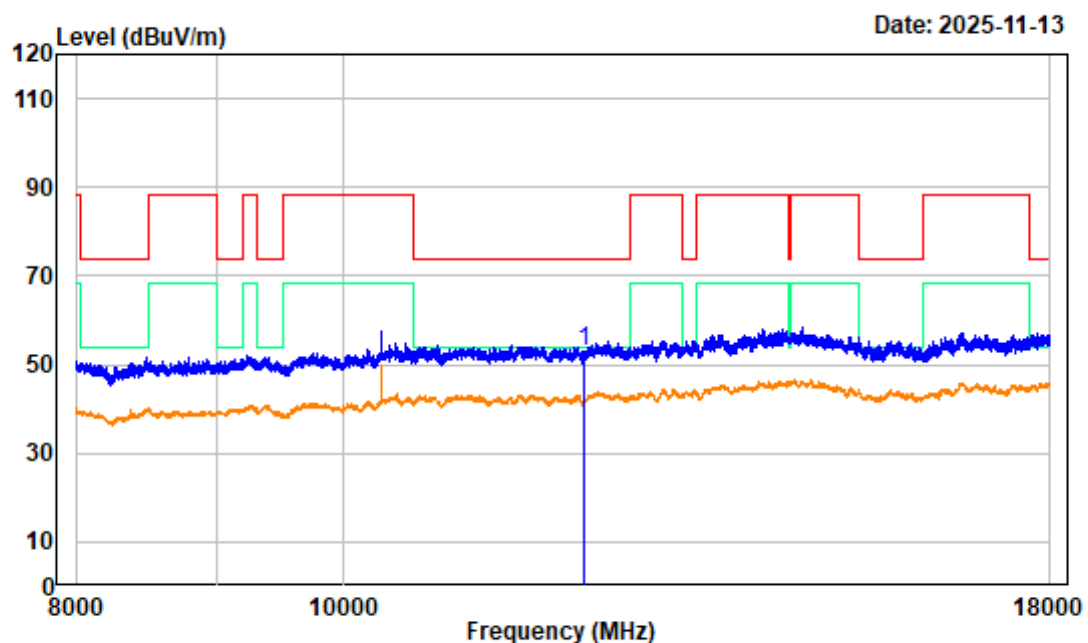

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 Low Channel 6105MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12210.000	5.46	47.72	53.18	74.00	-20.82	Peak


802.11be320 Low Channel 8GHz-18GHz_VERTICAL

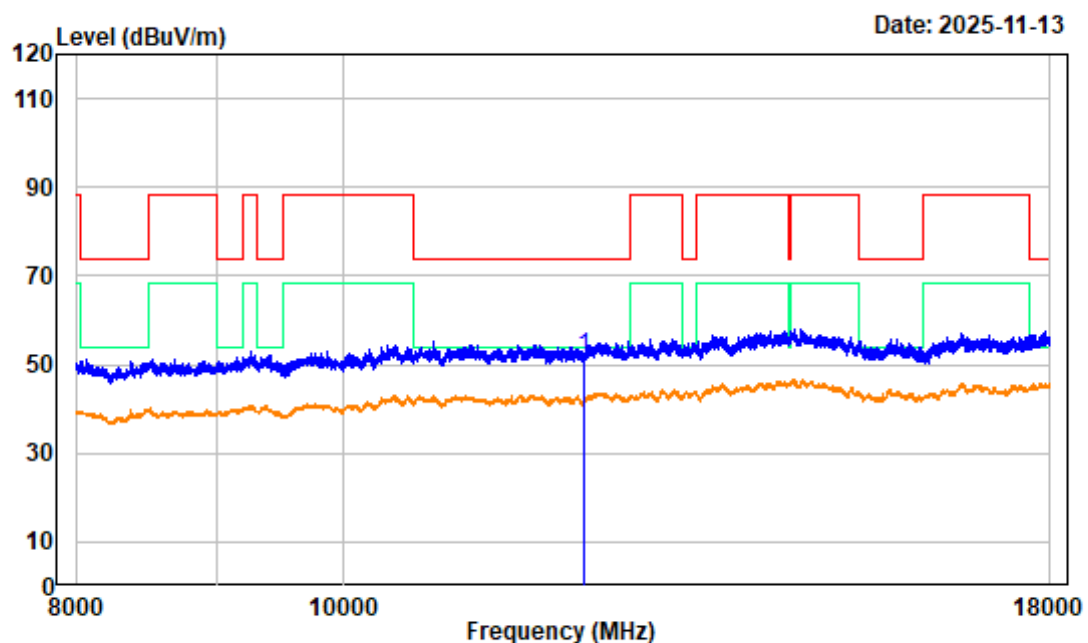

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 Low Channel 6105MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12210.000	5.46	46.11	51.57	74.00	-22.43	Peak


802.11be320 High Channel 1GHz-8GHz_HORIZONTAL

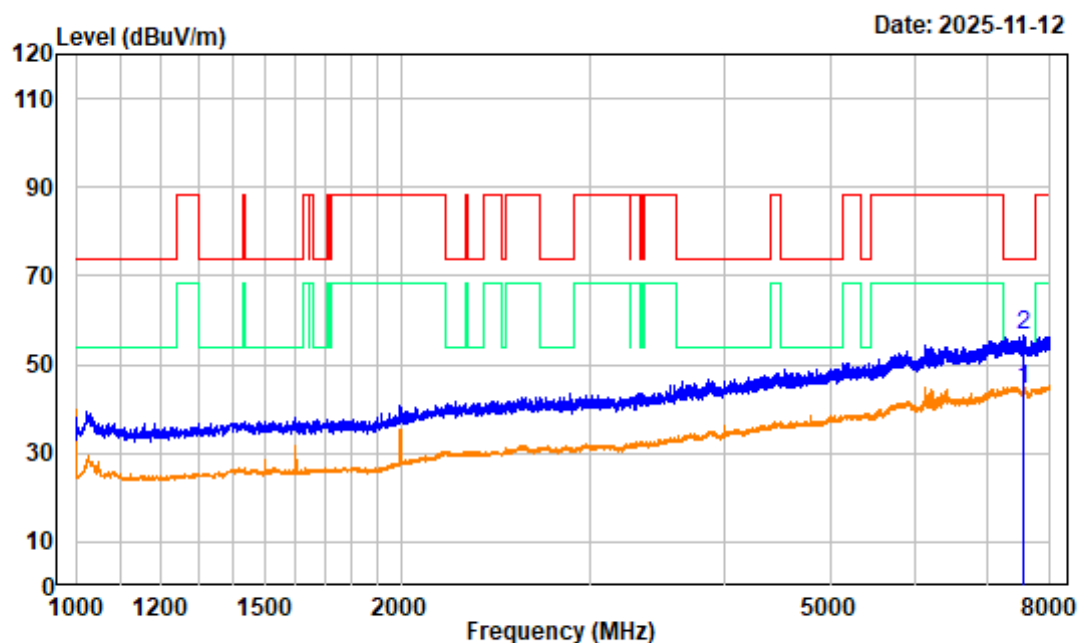

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 High Channel 6265MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7565.125	-1.06	45.47	44.41	54.00	-9.59	average
2	7565.125	-1.06	57.54	56.48	74.00	-17.52	peak


802.11be320 High Channel 1GHz-8GHz_VERTICAL

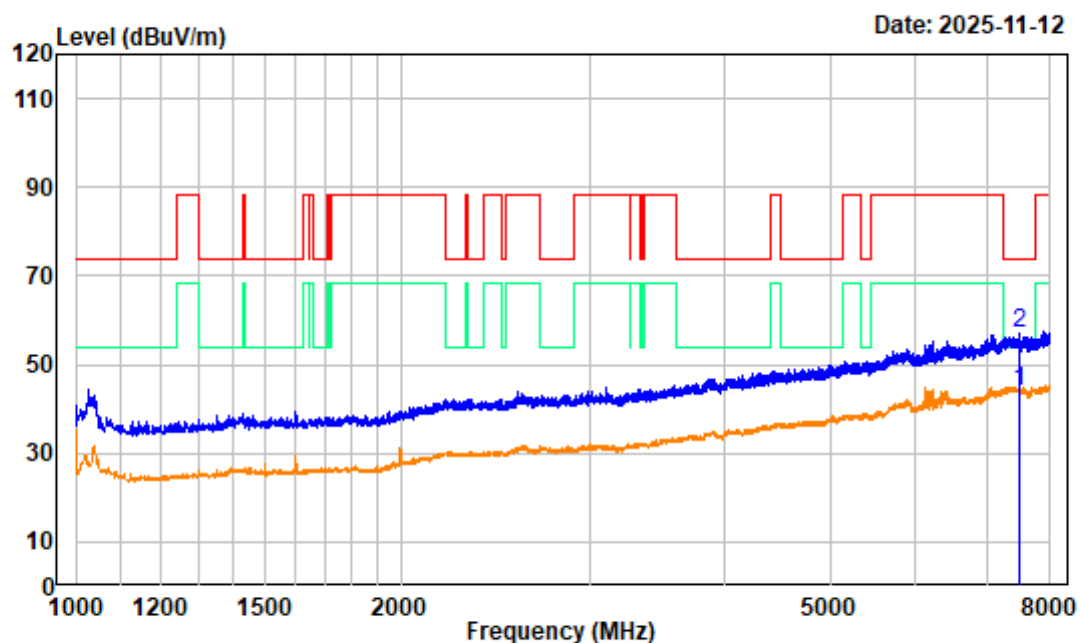

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 High Channel 6265MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7482.000	-0.91	45.00	44.09	54.00	-9.91	average
2	7482.000	-0.91	58.02	57.11	74.00	-16.89	peak


802.11be320 High Channel 8GHz-18GHz_HORIZONTAL

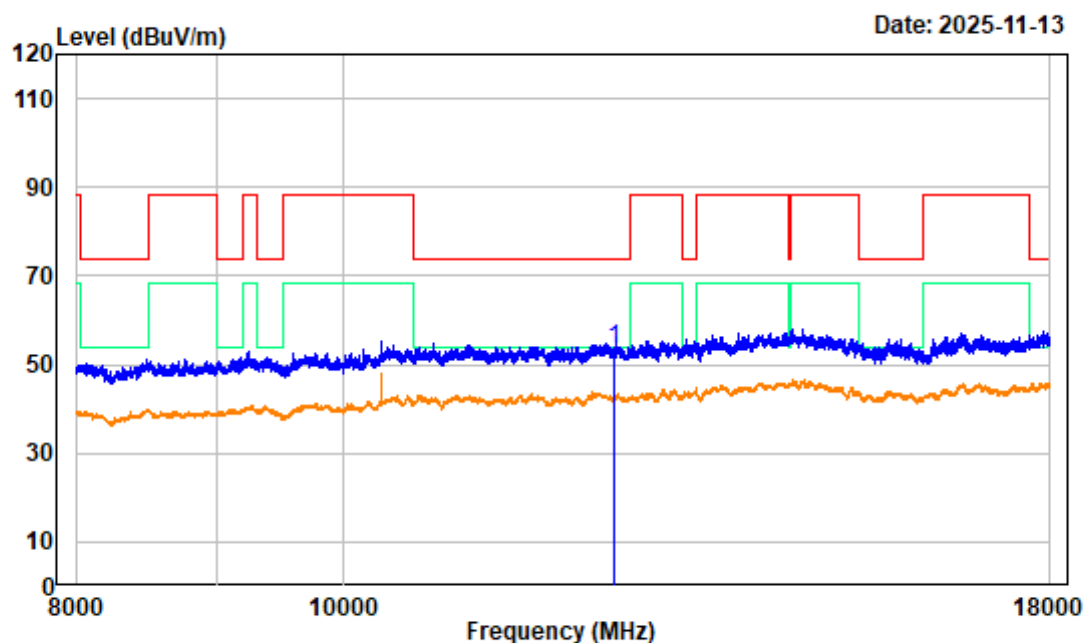

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 High Channel 6265MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12530.000	5.92	47.69	53.61	74.00	-20.39	Peak

802.11be320 High Channel 8GHz-18GHz_VERTICAL

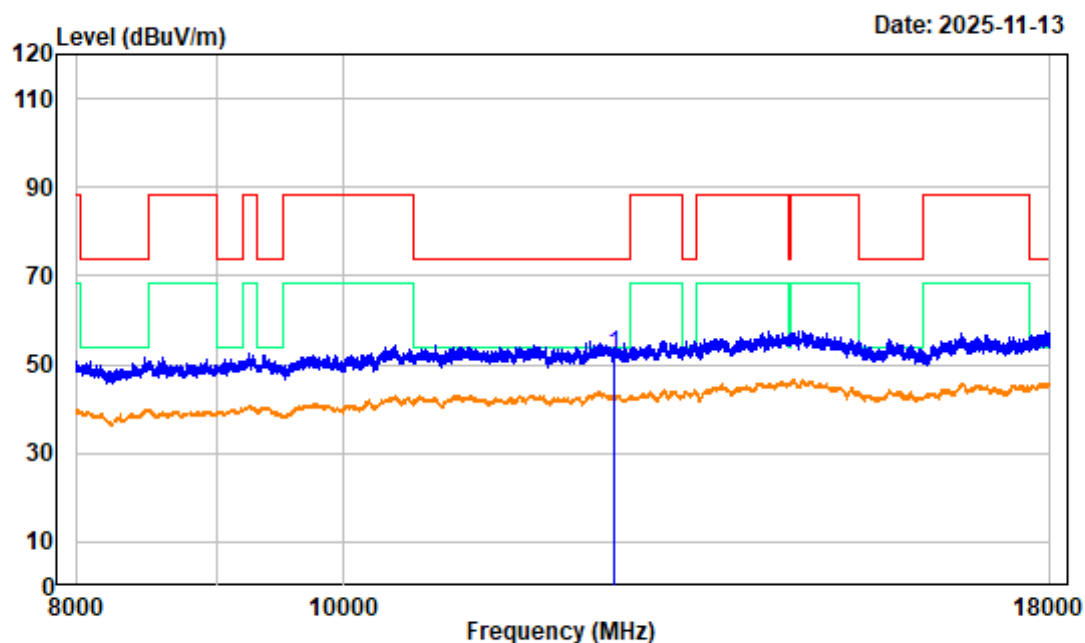


Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 High Channel 6265MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12530.000	5.92	45.95	51.87	74.00	-22.13	Peak

Crossed U-NII 5 and U-NII 6

802.11be320 Additional Channel 1GHz-8GHz_HORIZONTAL

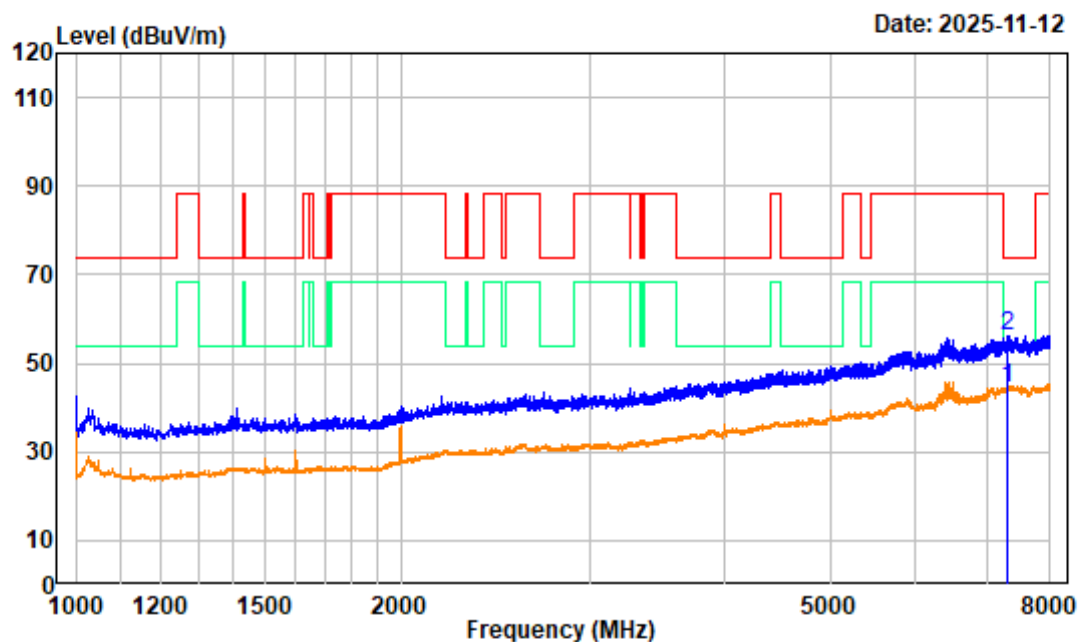

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504Z00193E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : 802.11be320 Additional Channel 6425MHz 1GHz-8GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7318.375	-1.15	45.47	44.32	54.00	-9.68	average
2	7318.375	-1.15	57.45	56.30	74.00	-17.70	peak


802.11be320 Additional Channel 1GHz-8GHz_VERTICAL

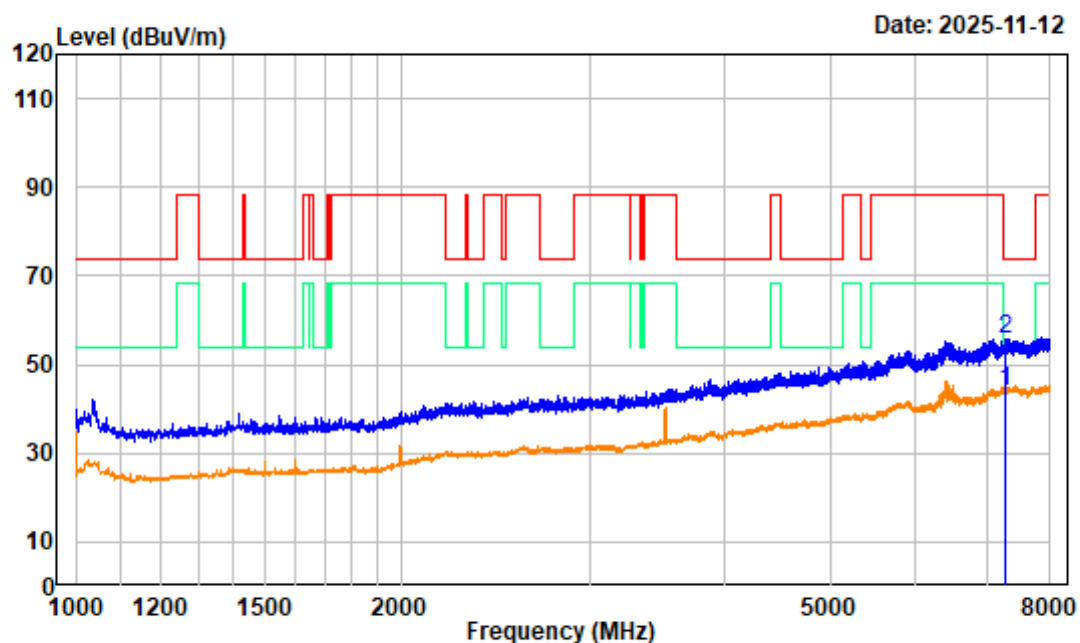

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 Additional Channel 6425MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7265.875	-1.23	45.33	44.10	54.00	-9.90	average
2	7265.875	-1.23	57.00	55.77	74.00	-18.23	peak


802.11be320 Additional Channel 8GHz-18GHz_HORIZONTAL

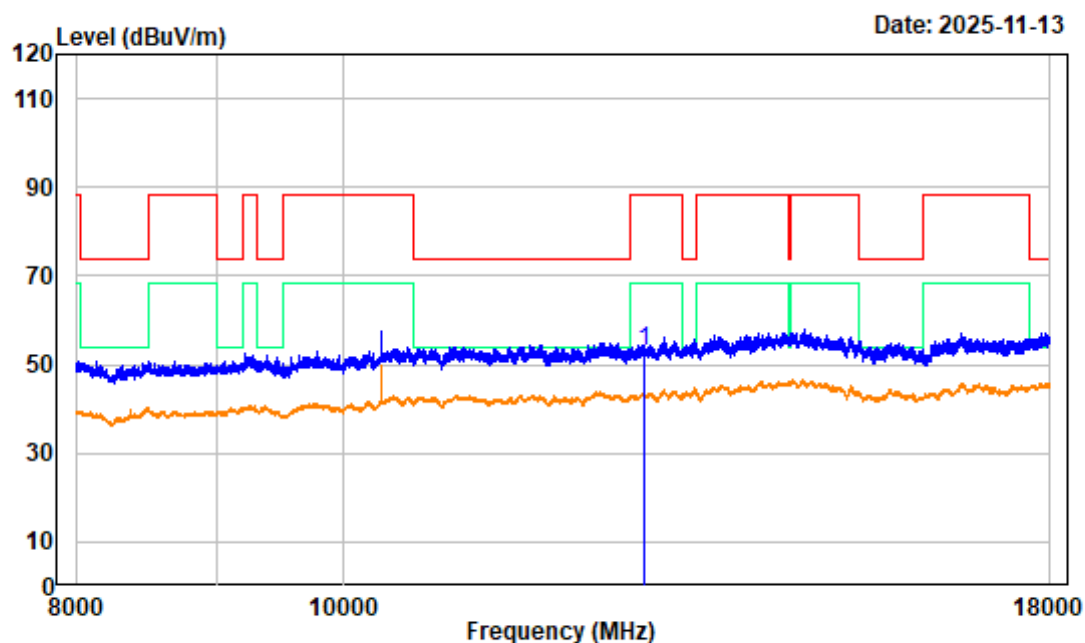

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 Additional Channel 6425MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12850.000	6.46	46.59	53.05	88.20	-35.15	Peak

802.11be320 Additional Channel 8GHz-18GHz_VERTICAL

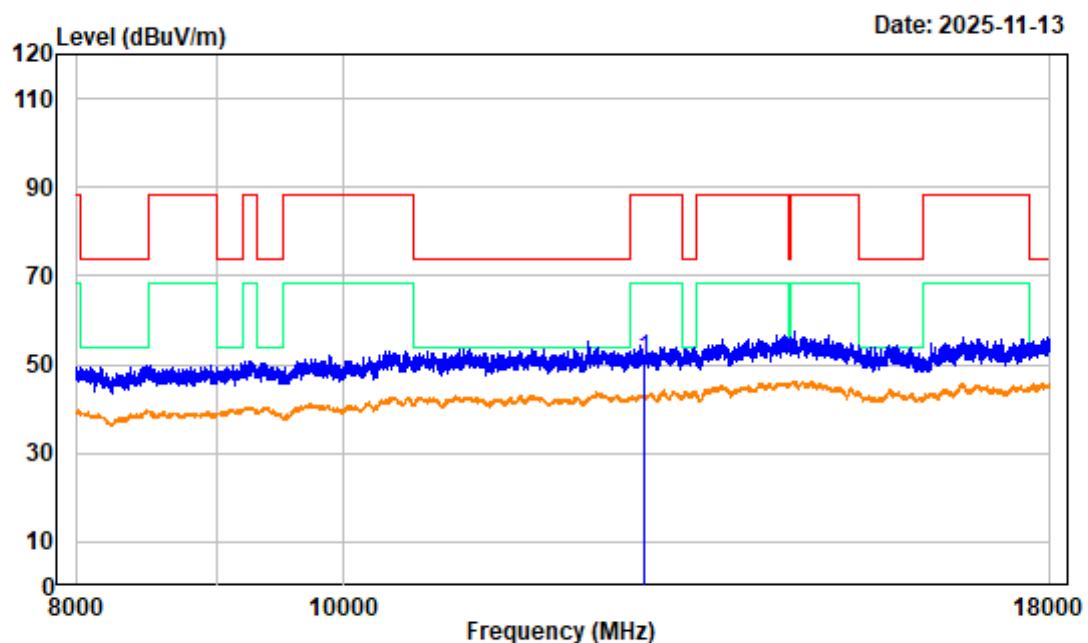


Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 Additional Channel 6425MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12850.000	6.46	44.76	51.22	88.20	-36.98	Peak

U-NII 6 Band (6425-6525 MHz)

802.11be20 Low Channel 1GHz-8GHz_HORIZONTAL

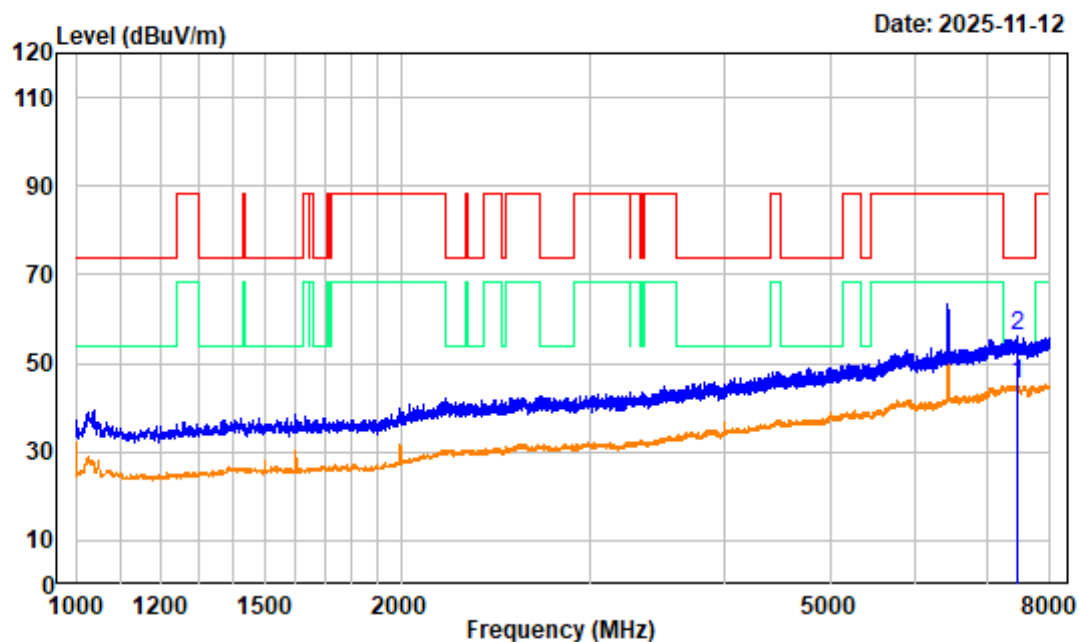

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504Z00193E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : 802.11be20 Low Channel 6435MHz 1GHz-8GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7458.375	-0.89	46.04	45.15	54.00	-8.85	average
2	7458.375	-0.89	57.04	56.15	74.00	-17.85	peak


802.11be20 Low Channel 1GHz-8GHz_VERTICAL

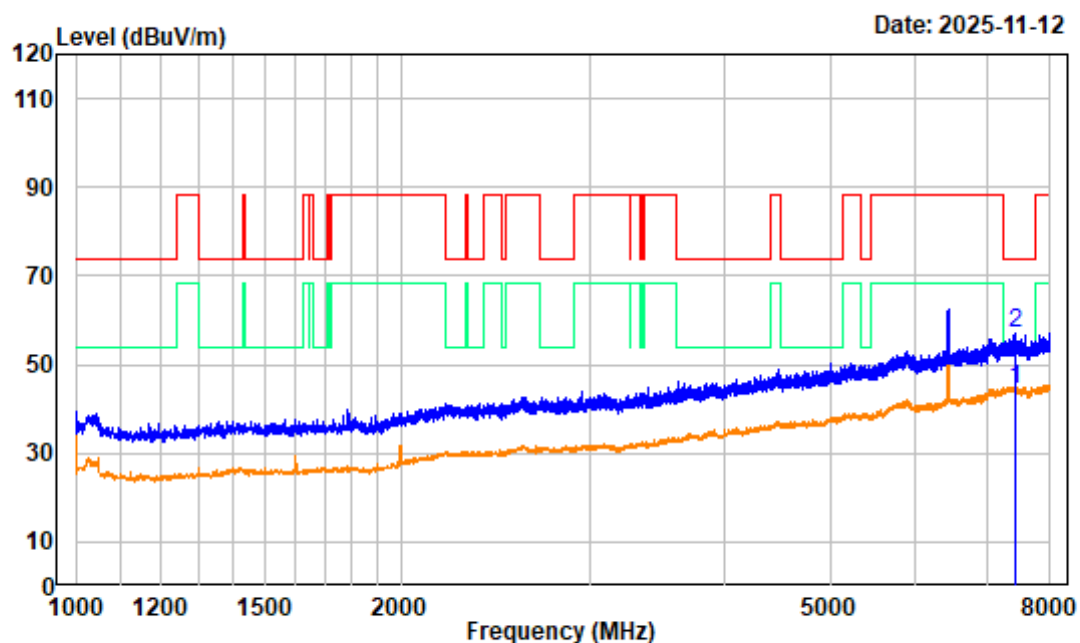

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Low Channel 6435MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7430.375	-1.07	45.27	44.20	54.00	-9.80	average
2	7430.375	-1.07	57.93	56.86	74.00	-17.14	peak


802.11be20 Low Channel 8GHz-18GHz_HORIZONTAL

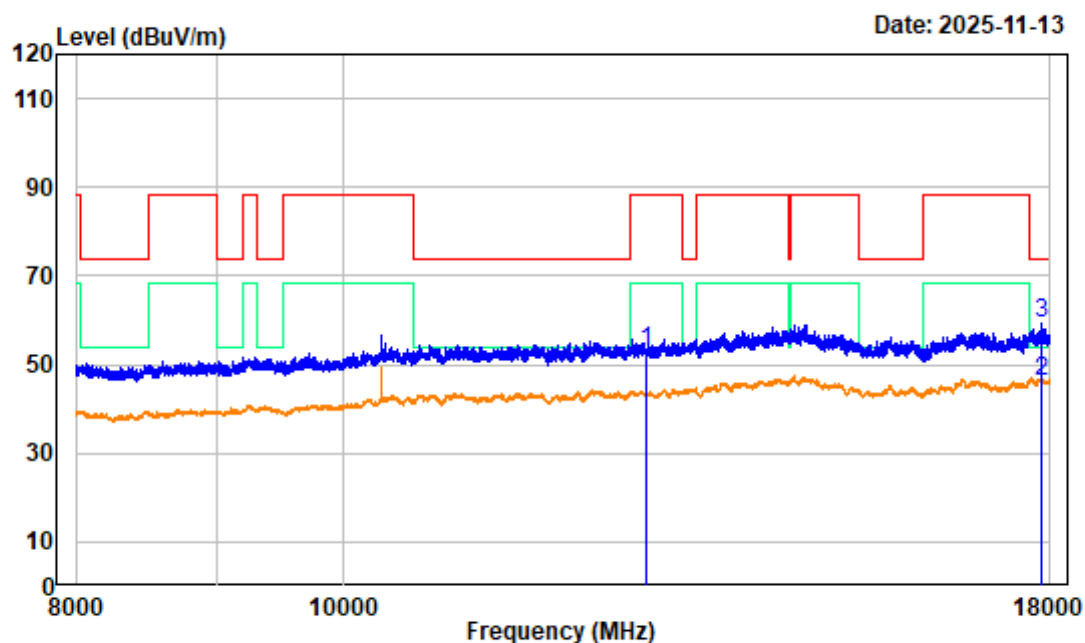

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Low Channel 6435MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12870.000	6.48	46.46	52.94	88.20	-35.26	Peak
2	17862.500	8.31	37.94	46.25	54.00	-7.75	Average
3	17862.500	8.31	50.97	59.28	74.00	-14.72	Peak


802.11be20 Low Channel 8GHz-18GHz_VERTICAL

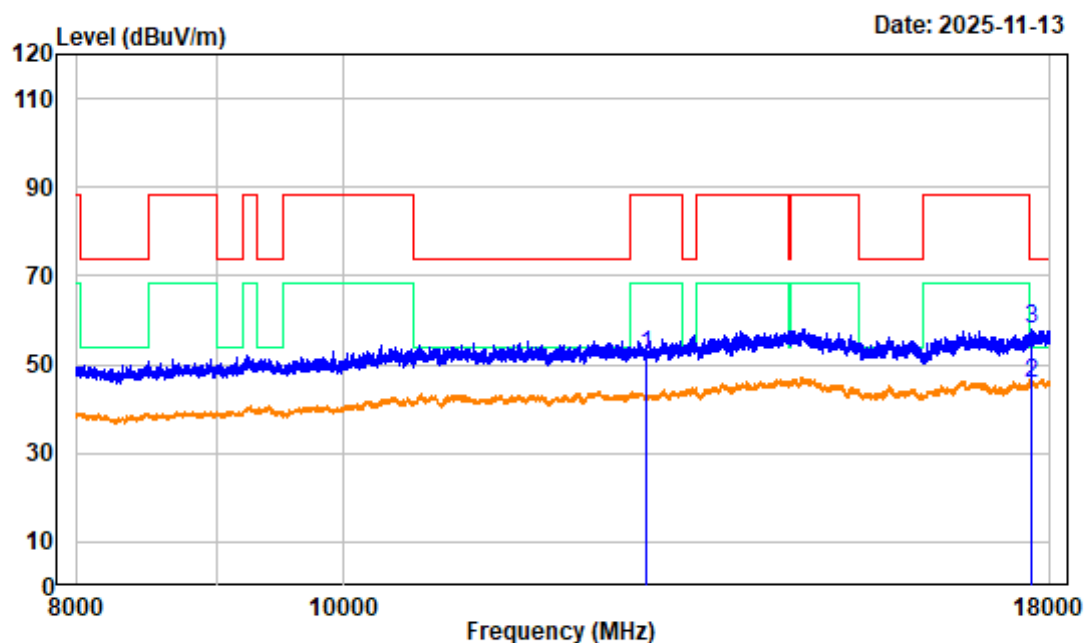

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Low Channel 6435MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12870.000	6.48	45.65	52.13	88.20	-36.07	Peak
2	17717.500	7.69	38.17	45.86	54.00	-8.14	Average
3	17717.500	7.69	50.16	57.85	74.00	-16.15	Peak


802.11be20 Middle Channel 1GHz-8GHz_HORIZONTAL

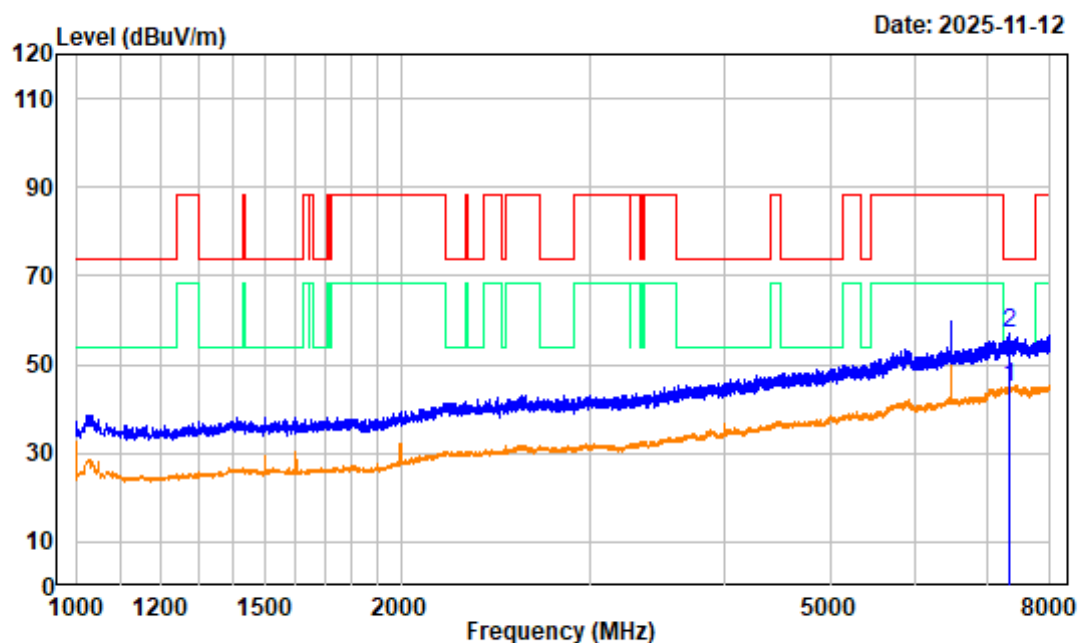

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Middle Channel 6475MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7334.125	-1.19	46.18	44.99	54.00	-9.01	average
2	7334.125	-1.19	58.16	56.97	74.00	-17.03	peak


802.11be20 Middle Channel 1GHz-8GHz_VERTICAL

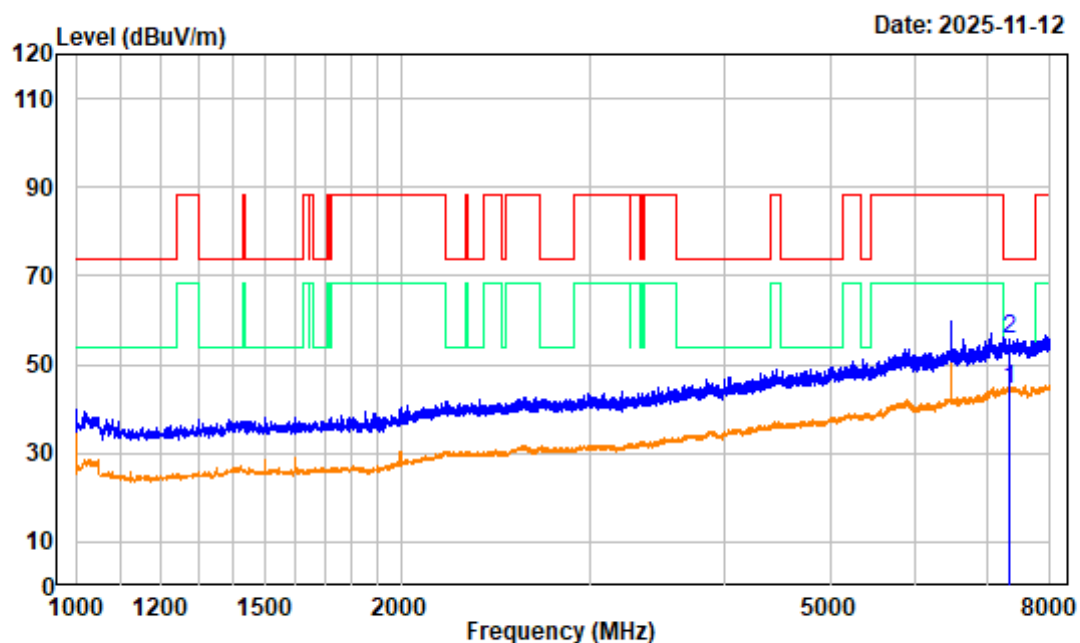

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Middle Channel 6475MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7321.000	-1.16	45.48	44.32	54.00	-9.68	average
2	7321.000	-1.16	56.74	55.58	74.00	-18.42	peak


802.11be20 Middle Channel 8GHz-18GHz_HORIZONTAL

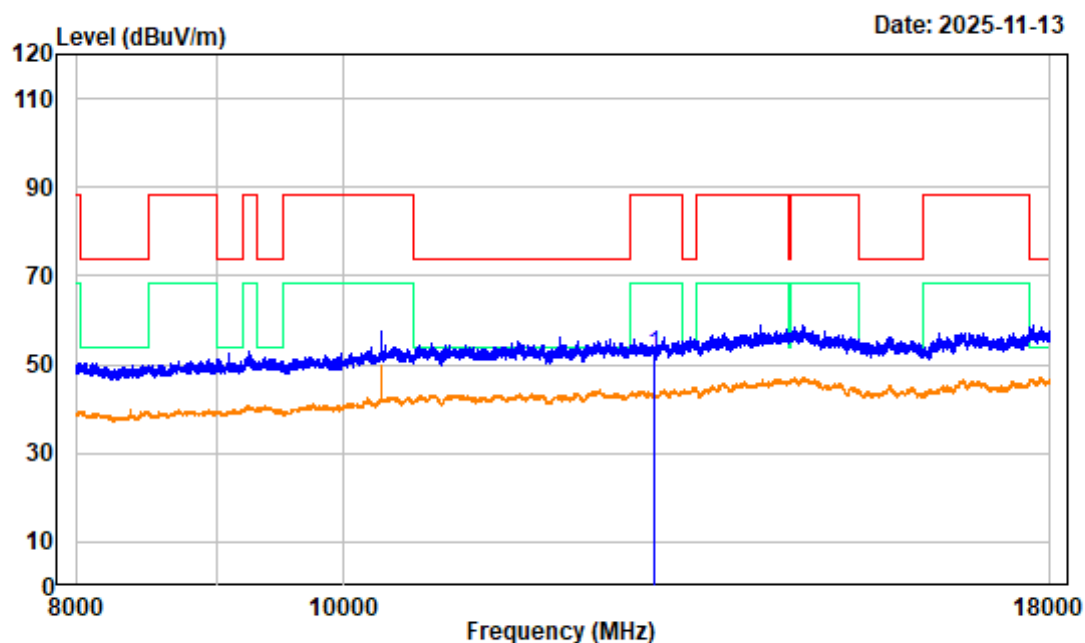

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Middle Channel 6475MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12950.000	6.34	45.60	51.94	88.20	-36.26	Peak


802.11be20 Middle Channel 8GHz-18GHz_VERTICAL

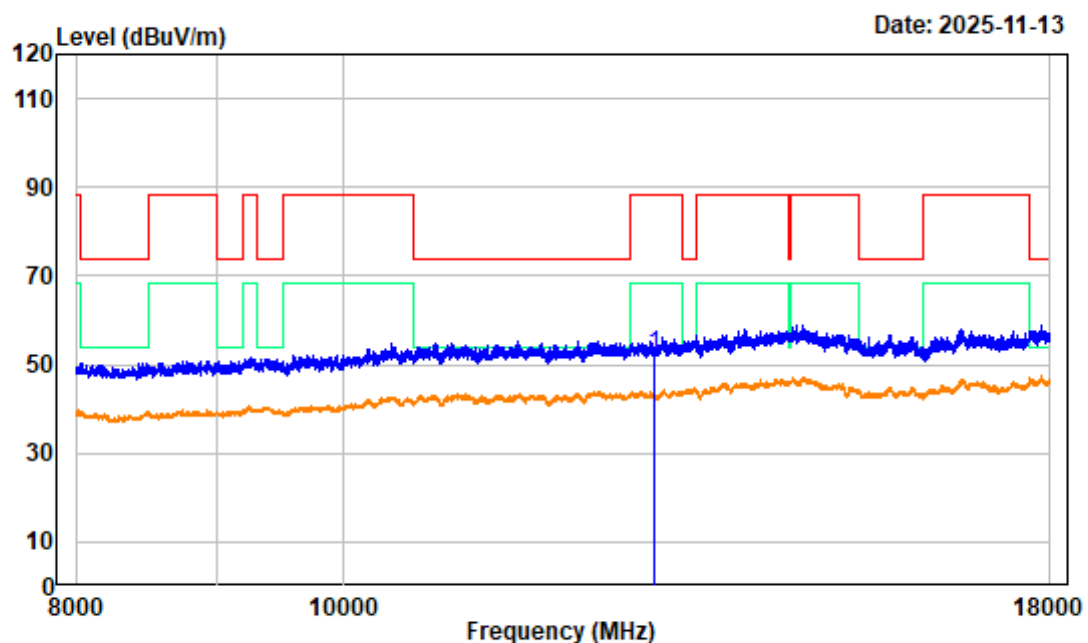

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Middle Channel 6475MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12950.000	6.34	45.56	51.90	88.20	-36.30	Peak


802.11be20 High Channel 1GHz-8GHz_HORIZONTAL

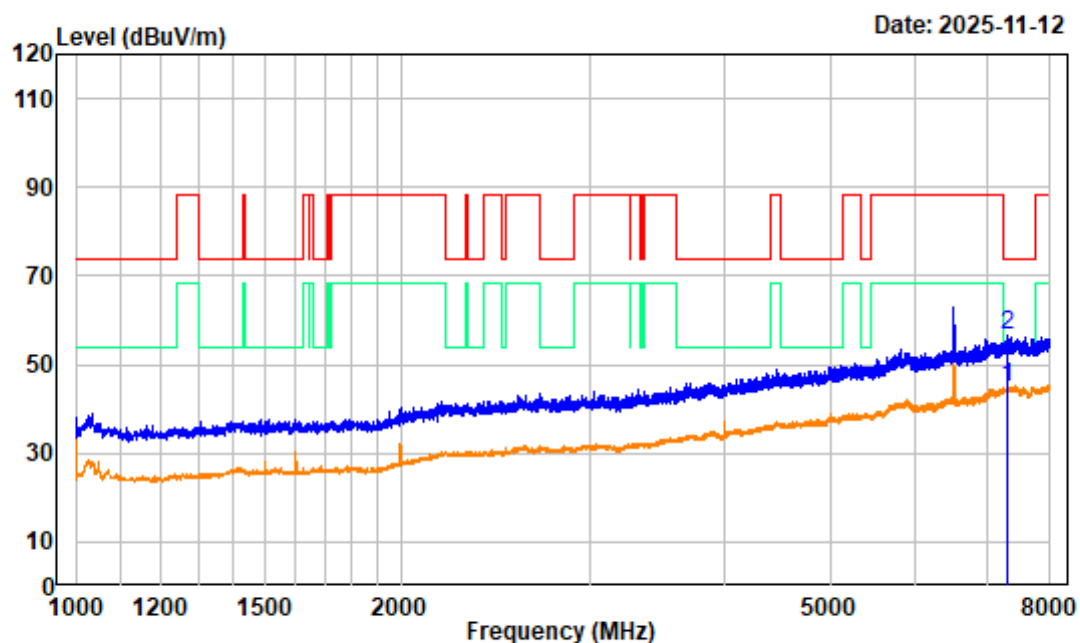

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 High Channel 6515MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7308.750	-1.11	45.86	44.75	54.00	-9.25	average
2	7308.750	-1.11	57.85	56.74	74.00	-17.26	peak


802.11be20 High Channel 1GHz-8GHz_VERTICAL

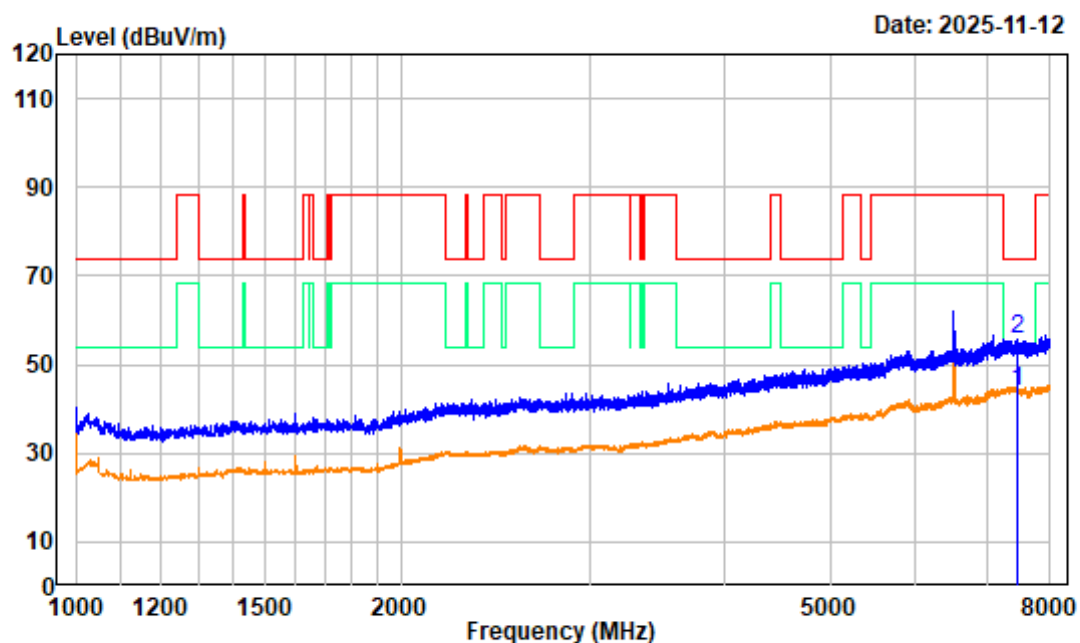

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 High Channel 6515MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7463.625	-0.89	45.02	44.13	54.00	-9.87	average
2	7463.625	-0.89	56.64	55.75	74.00	-18.25	peak


802.11be20 High Channel 8GHz-18GHz_HORIZONTAL

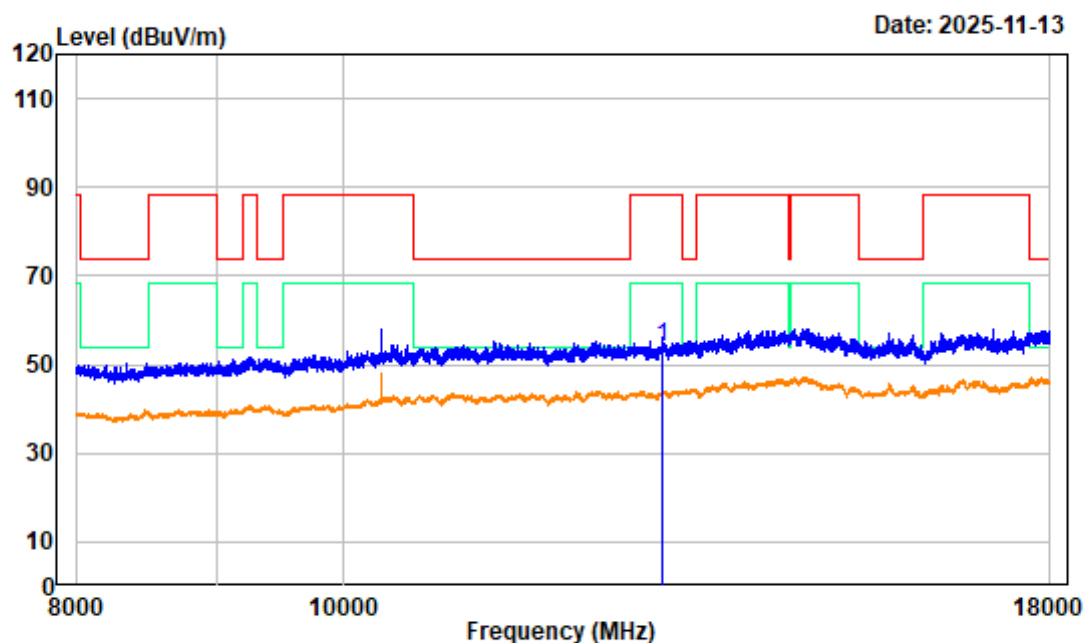

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 High Channel 6515MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13030.000	7.14	46.59	53.73	88.20	-34.47	Peak


802.11be20 High Channel 8GHz-18GHz_VERTICAL

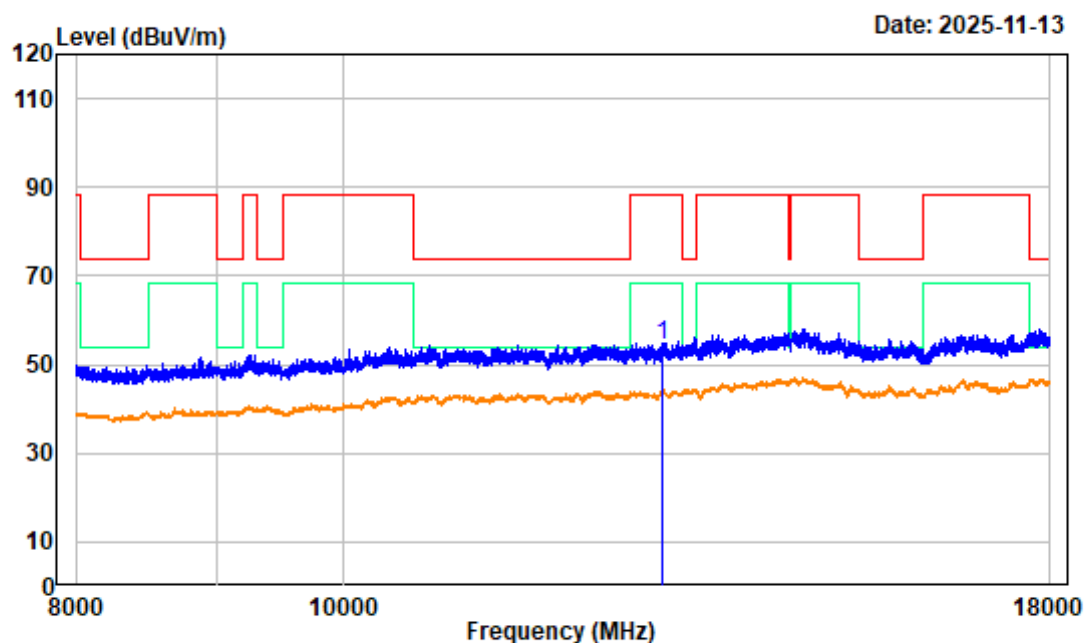

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 High Channel 6515MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13030.000	7.14	47.10	54.24	88.20	-33.96	Peak


802.11be40 Low Channel 1GHz-8GHz_HORIZONTAL

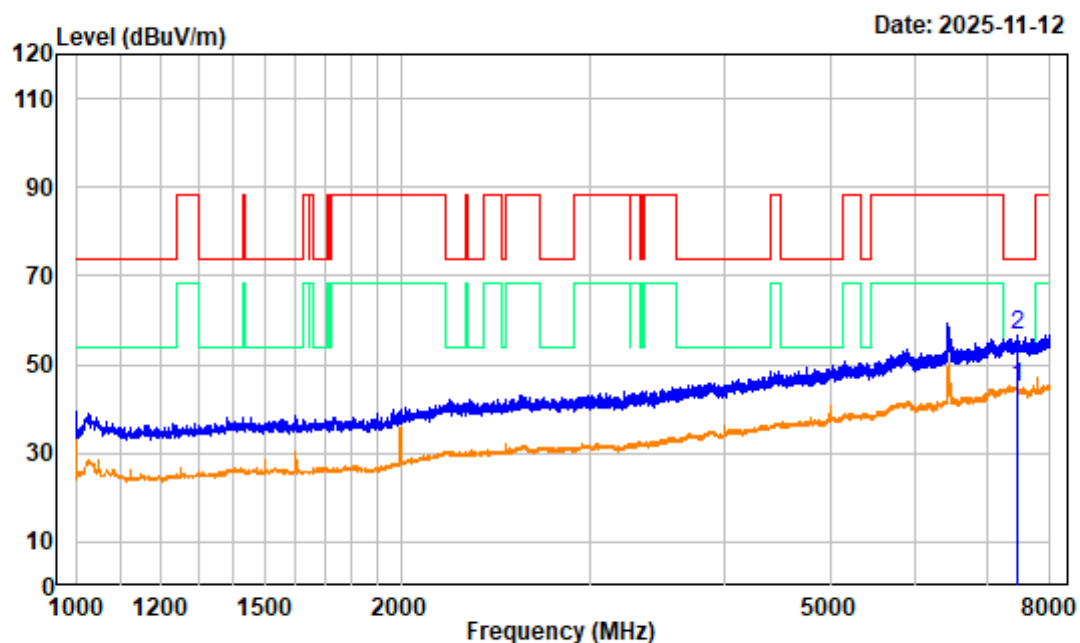

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Low Channel 6445MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7476.750	-0.91	45.73	44.82	54.00	-9.18	average
2	7476.750	-0.91	57.72	56.81	74.00	-17.19	peak


802.11be40 Low Channel 1GHz-8GHz_VERTICAL

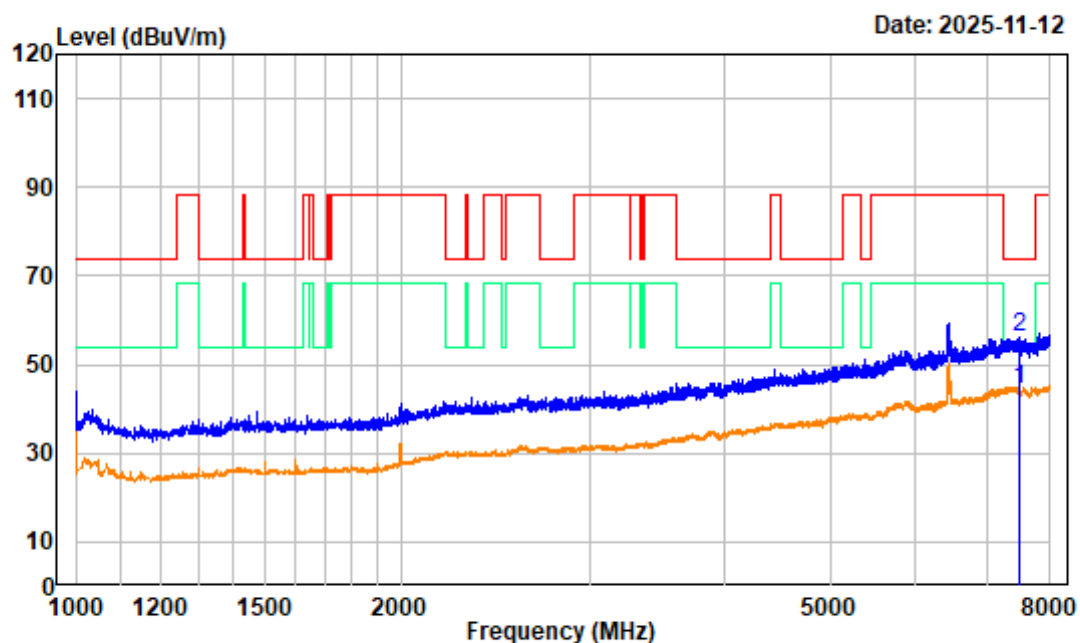

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Low Channel 6445MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7503.875	-0.93	45.16	44.23	54.00	-9.77	average
2	7503.875	-0.93	57.00	56.07	74.00	-17.93	peak


802.11be40 Low Channel 8GHz-18GHz_HORIZONTAL

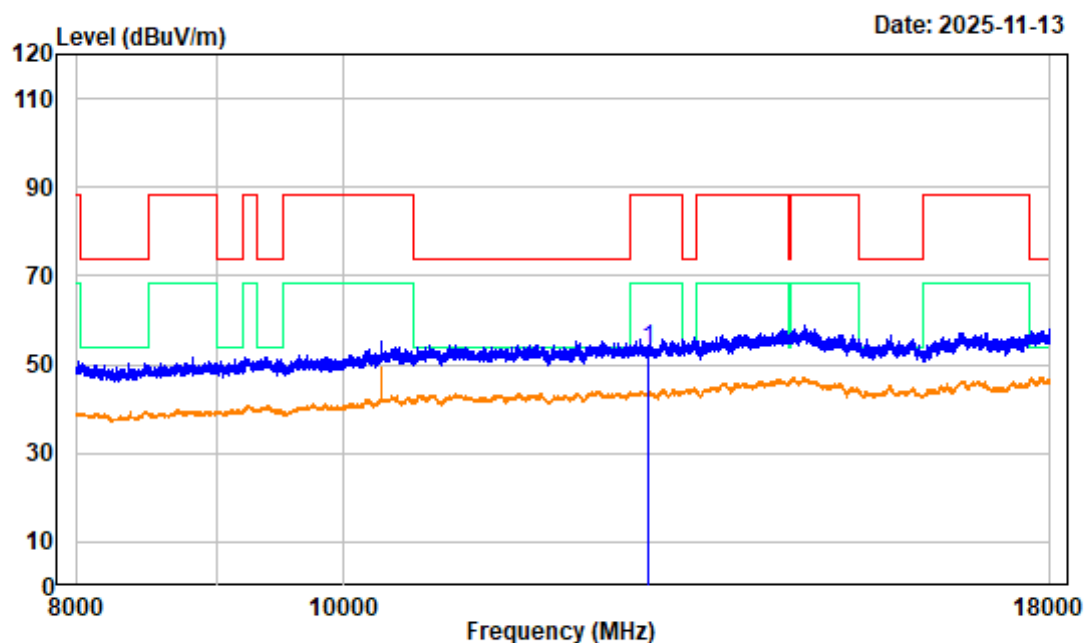

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Low Channel 6445MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12890.000	6.50	46.95	53.45	88.20	-34.75	Peak


802.11be40 Low Channel 8GHz-18GHz_VERTICAL

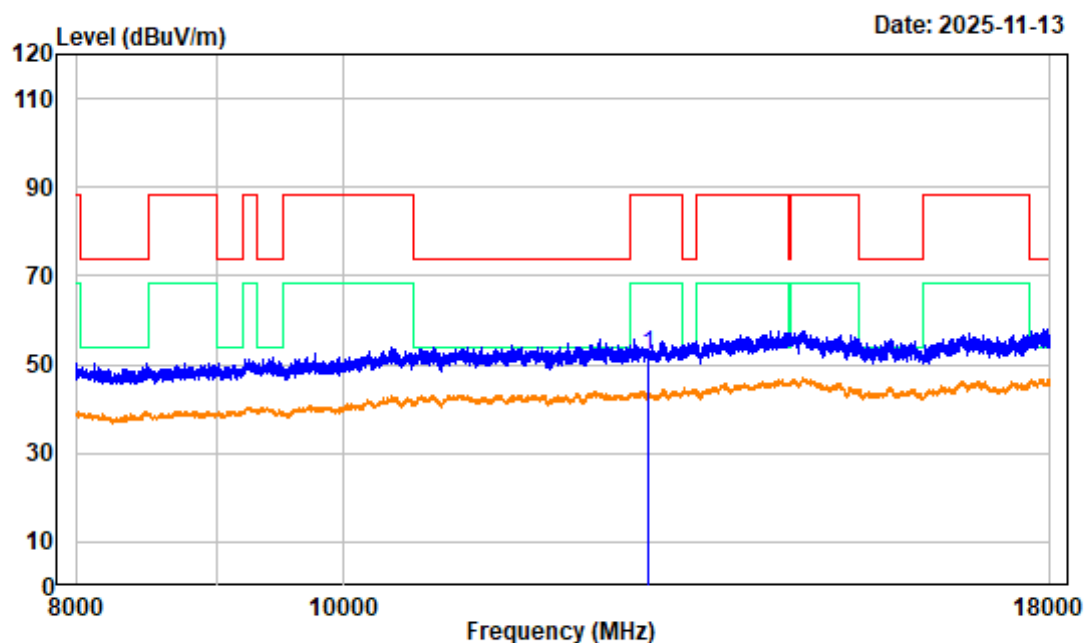

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Low Channel 6445MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12890.000	6.50	45.45	51.95	88.20	-36.25	Peak


802.11be40 High Channel 1GHz-8GHz_HORIZONTAL

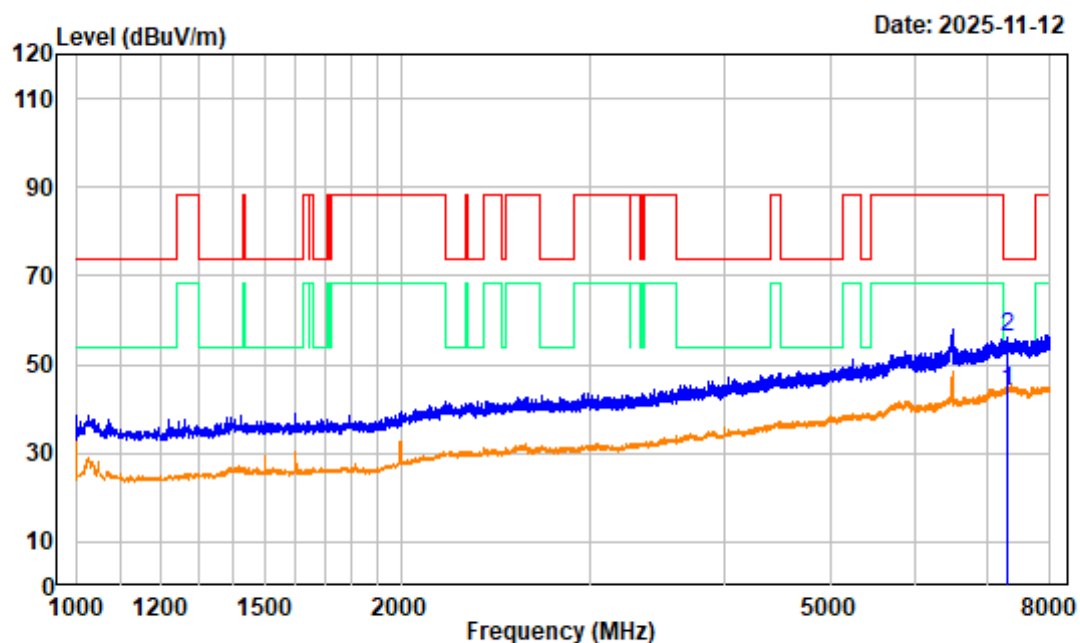

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 High Channel 6485MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7303.500	-1.10	45.16	44.06	54.00	-9.94	average
2	7303.500	-1.10	57.14	56.04	74.00	-17.96	peak


802.11be40 High Channel 1GHz-8GHz_VERTICAL

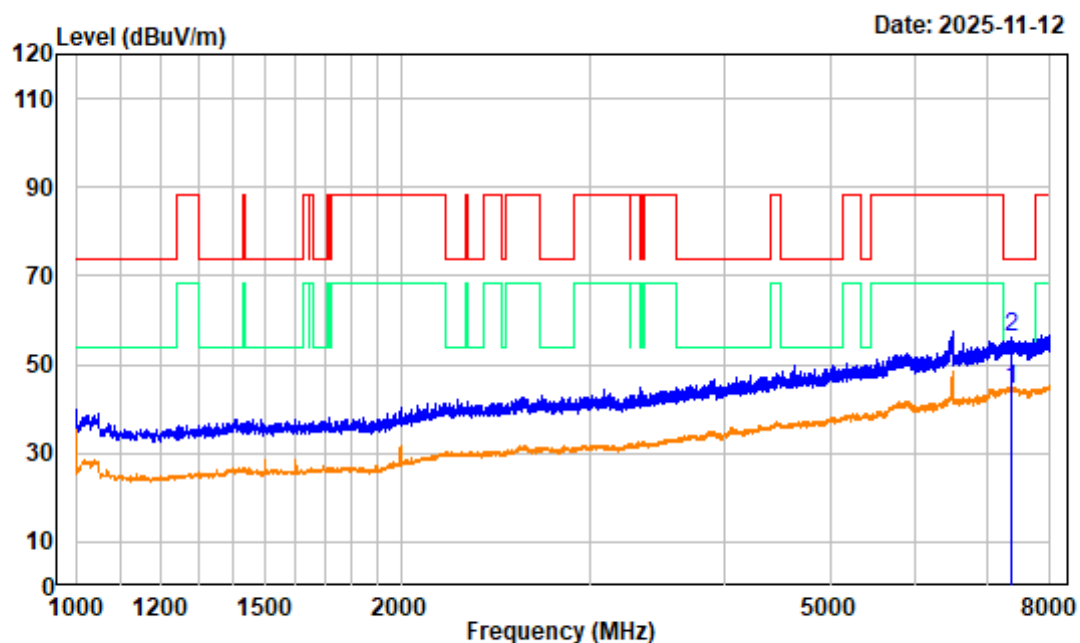

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 High Channel 6485MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7376.125	-1.29	45.86	44.57	54.00	-9.43	average
2	7376.125	-1.29	57.33	56.04	74.00	-17.96	peak


802.11be40 High Channel 8GHz-18GHz_HORIZONTAL

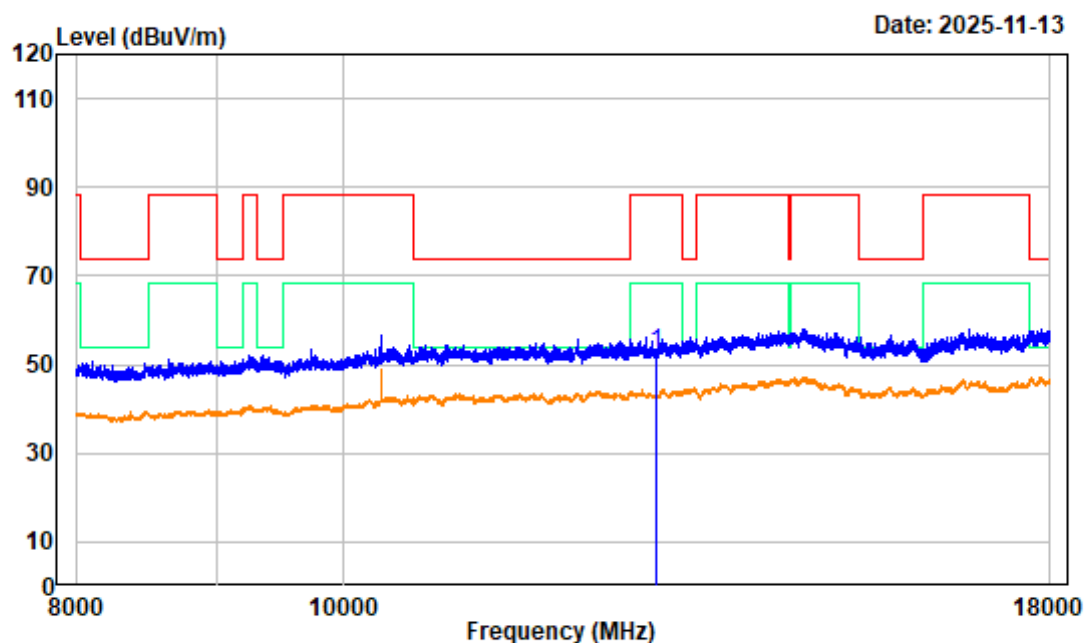

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 High Channel 6485MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12970.000	6.49	46.12	52.61	88.20	-35.59	Peak


802.11be40 High Channel 8GHz-18GHz_VERTICAL

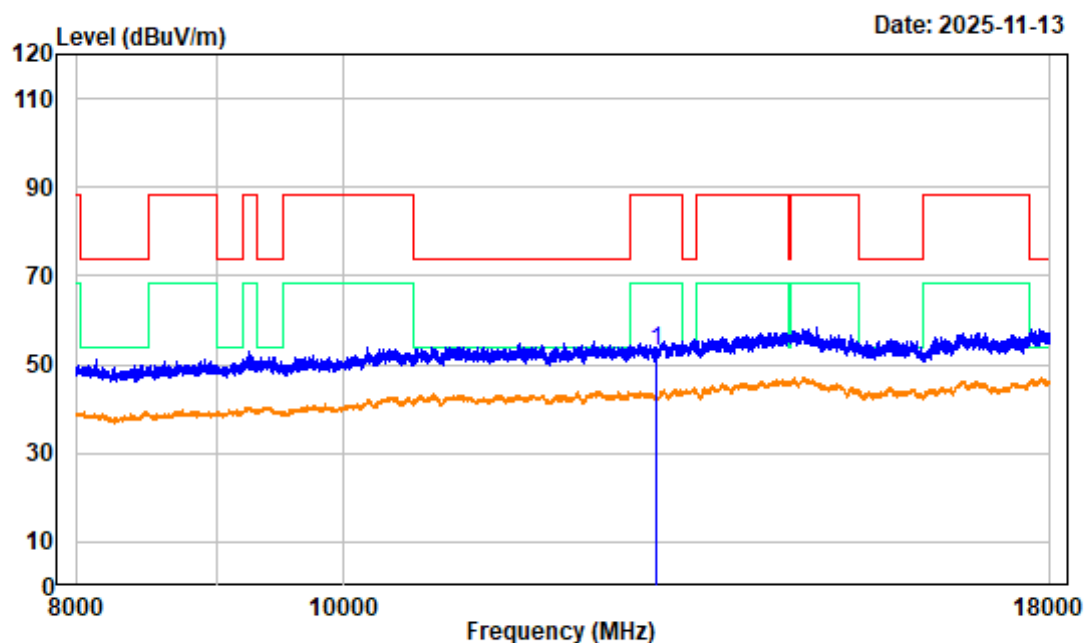

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 High Channel 6485MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12970.000	6.49	46.40	52.89	88.20	-35.31	Peak


802.11be80 Middle Channel 1GHz-8GHz_HORIZONTAL

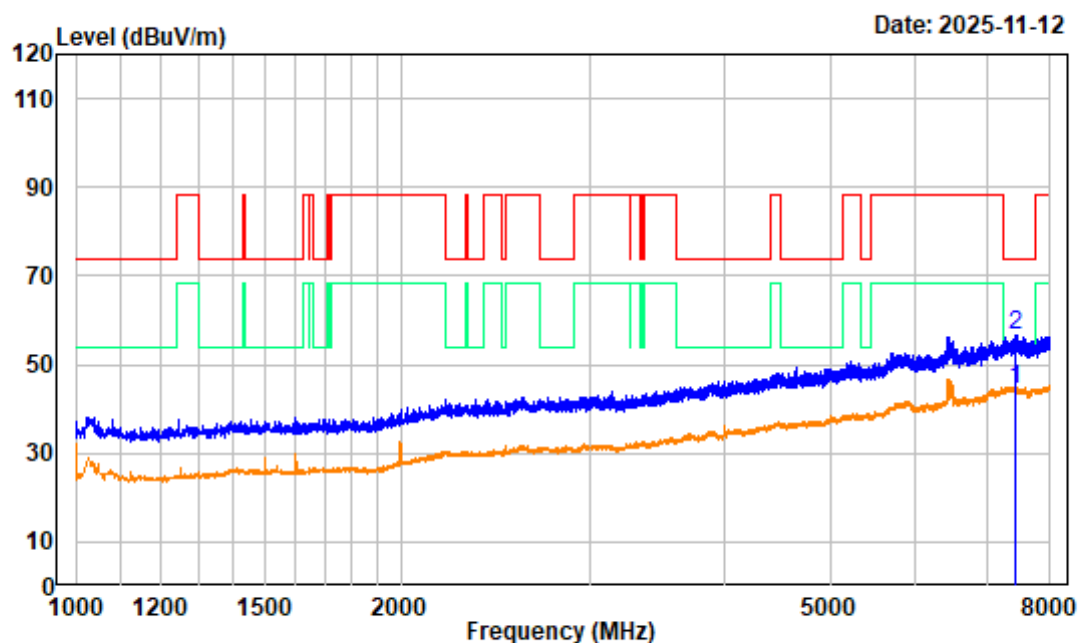

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Middle Channel 6465MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7444.375	-0.95	45.41	44.46	54.00	-9.54	average
2	7444.375	-0.95	57.43	56.48	74.00	-17.52	peak


802.11be80 Middle Channel 1GHz-8GHz_VERTICAL

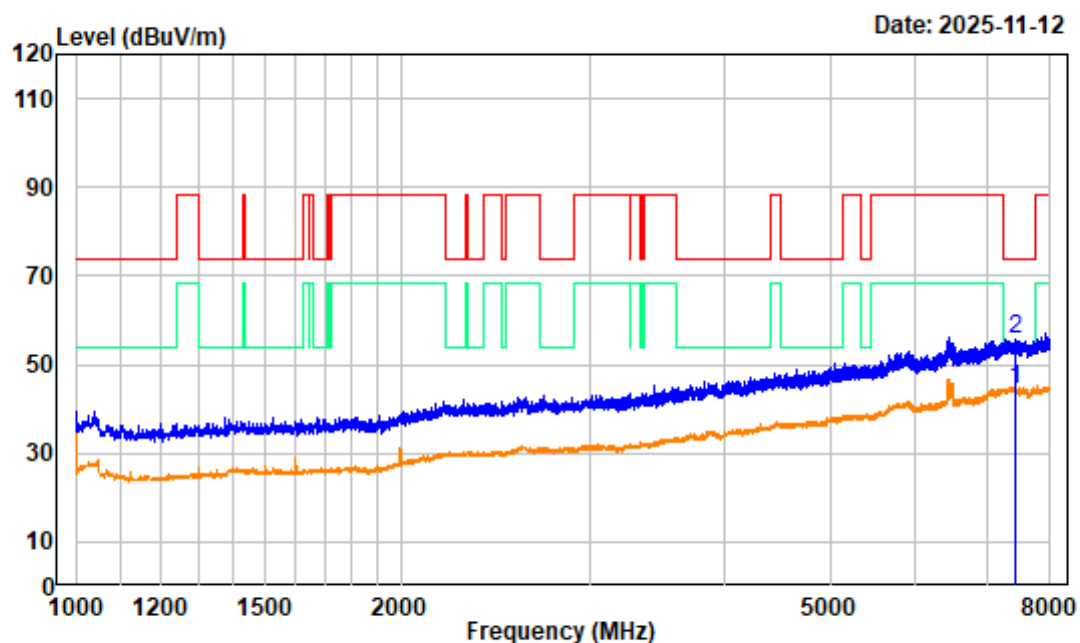

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Middle Channel 6465MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7443.500	-0.95	45.14	44.19	54.00	-9.81	average
2	7443.500	-0.95	56.72	55.77	74.00	-18.23	peak


802.11be80 Middle Channel 8GHz-18GHz_HORIZONTAL

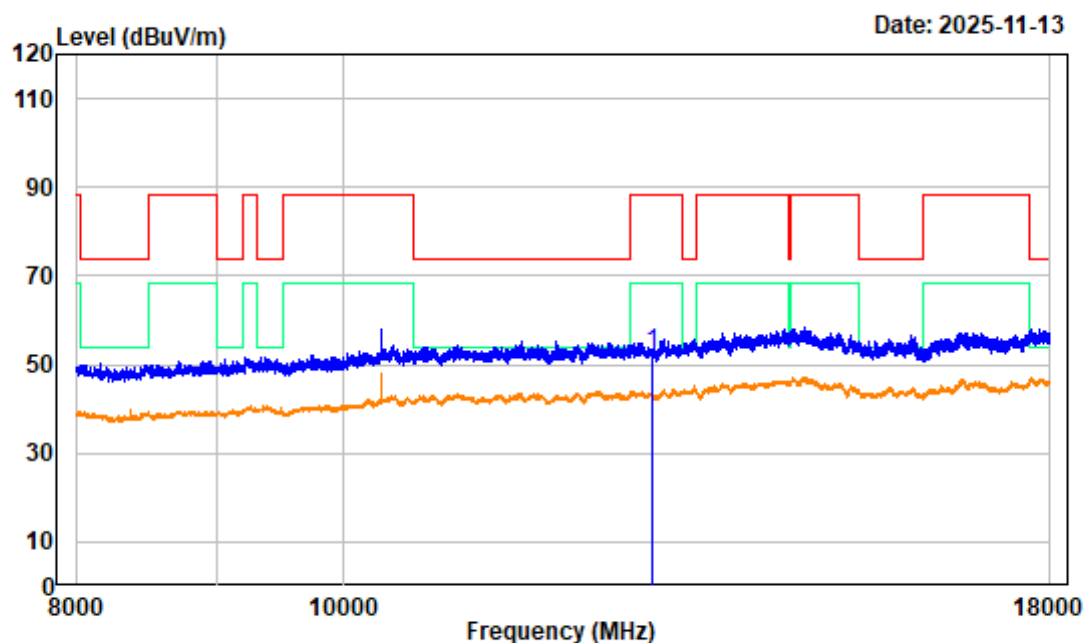

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Middle Channel 6465MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12930.000	6.41	46.31	52.72	88.20	-35.48	Peak

802.11be80 Middle Channel 8GHz-18GHz_VERTICAL

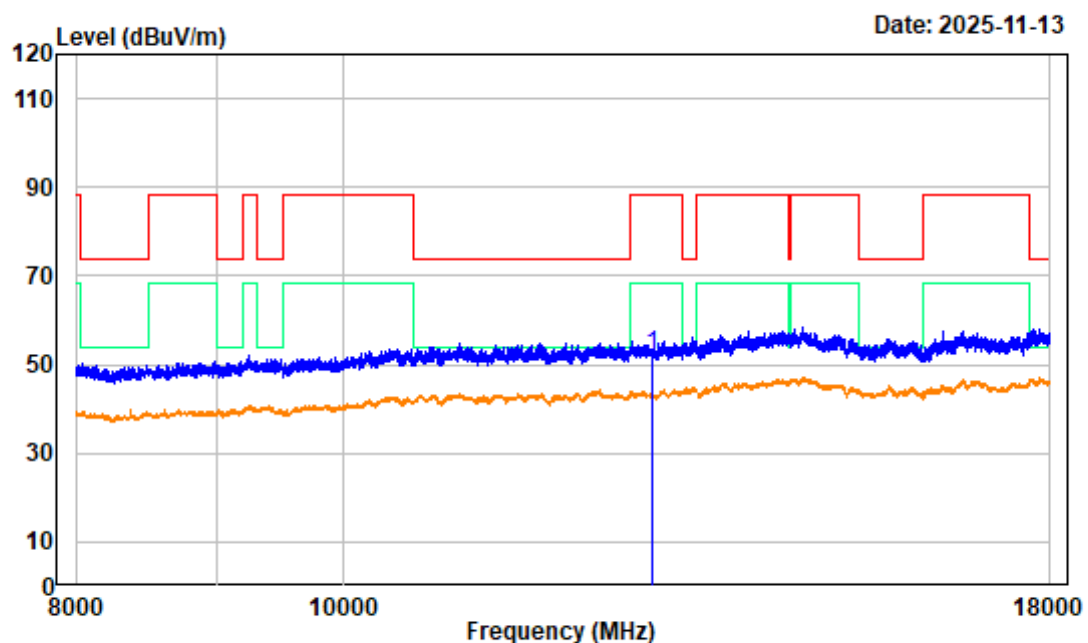


Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Middle Channel 6465MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	12930.000	6.41	45.87	52.28	88.20	-35.92	Peak

Crossed U-NII 6 and U-NII 7

802.11be40 Additional Channel 1GHz-8GHz_HORIZONTAL

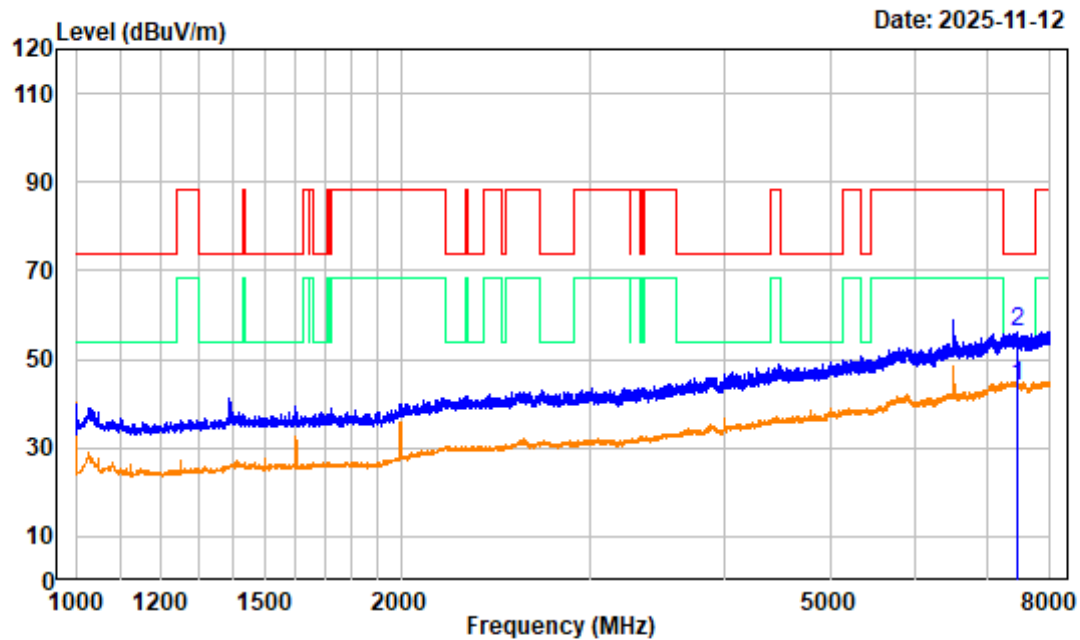

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504Z00193E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : 802.11be40 Additional Channel 6525MHz 1GHz-8GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7469.750	-0.90	45.03	44.13	54.00	-9.87	Average
2	7469.750	-0.90	56.90	56.00	74.00	-18.00	peak


802.11be40 Additional Channel 1GHz-8GHz_VERTICAL

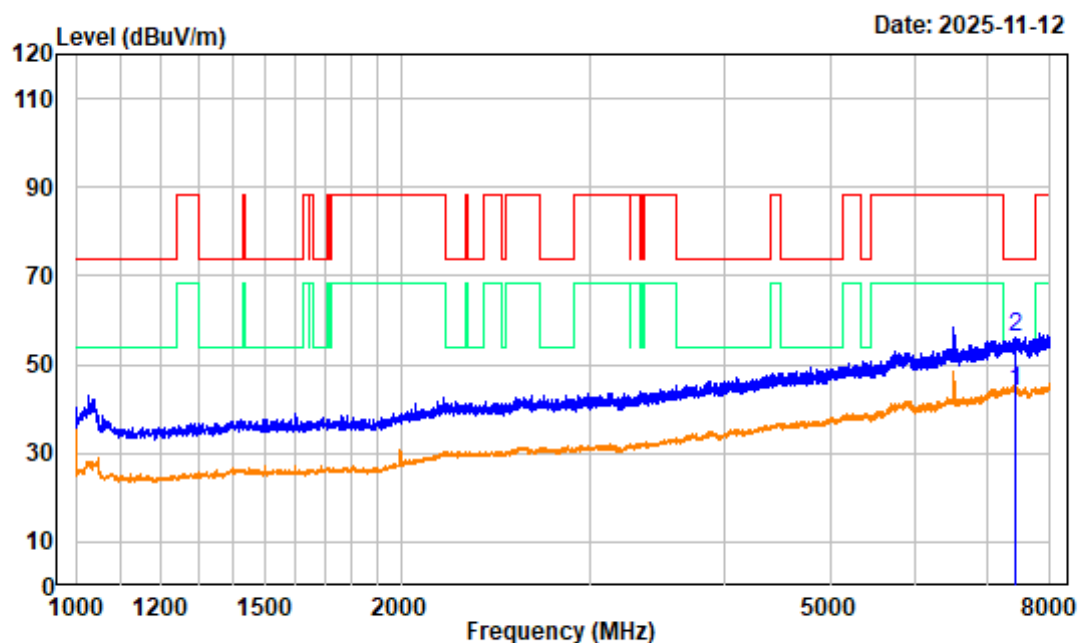

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Additional Channel 6525MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7439.125	-0.98	44.94	43.96	54.00	-10.04	average
2	7439.125	-0.98	57.05	56.07	74.00	-17.93	peak


802.11be40 Additional Channel 8GHz-18GHz_HORIZONTAL

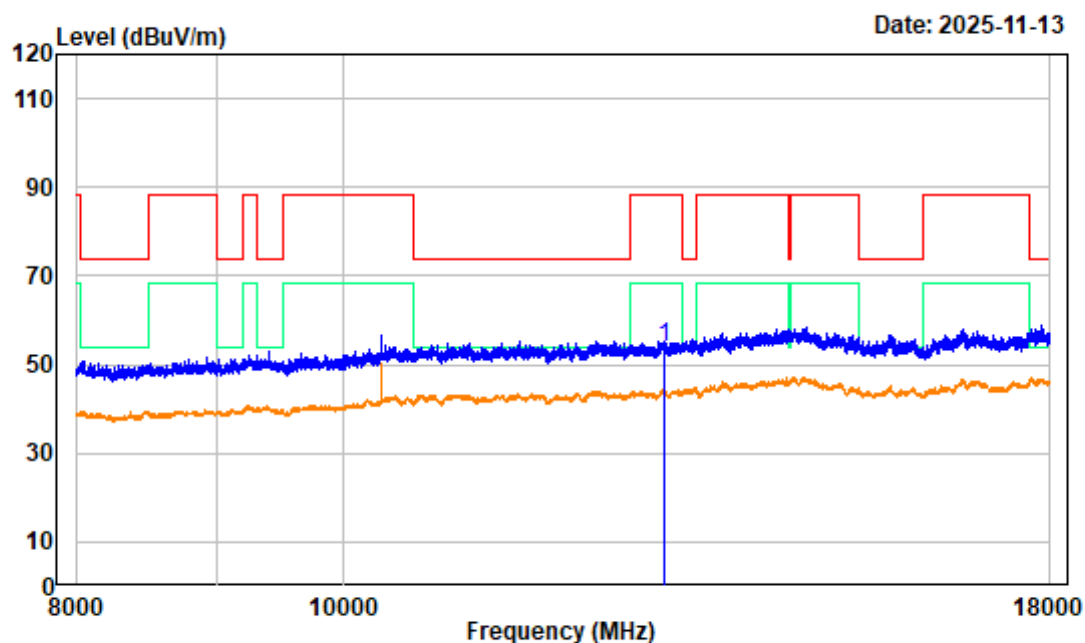

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Additional Channel 6525MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13050.000	7.43	46.49	53.92	88.20	-34.28	Peak


802.11be40 Additional Channel 8GHz-18GHz_VERTICAL

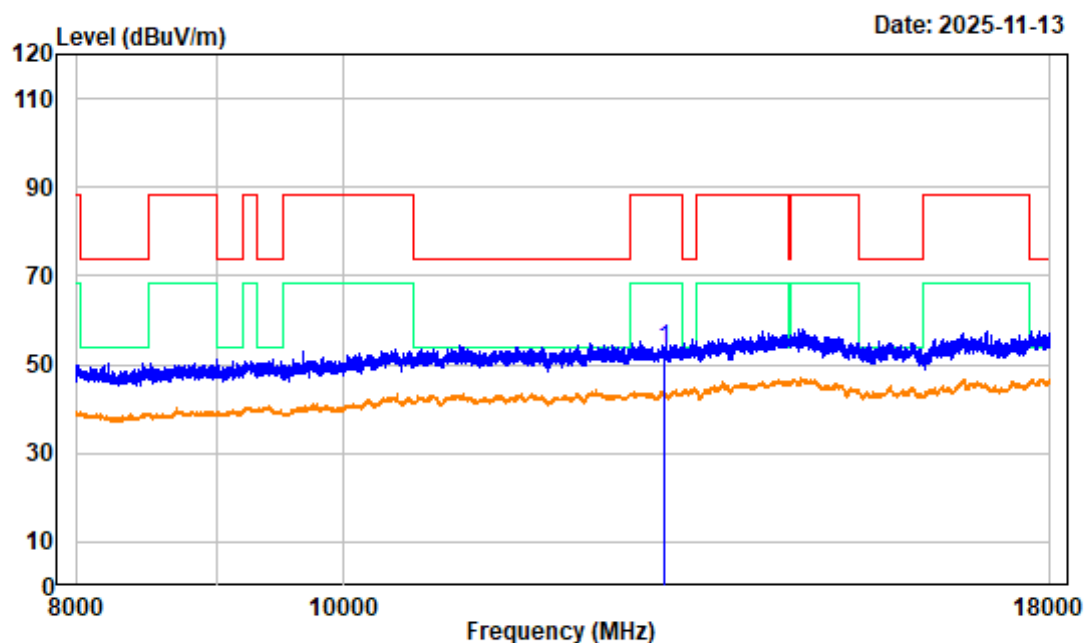

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Additional Channel 6525MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13050.000	7.43	45.92	53.35	88.20	-34.85	Peak


802.11be80 Additional Channel 1GHz-8GHz_HORIZONTAL

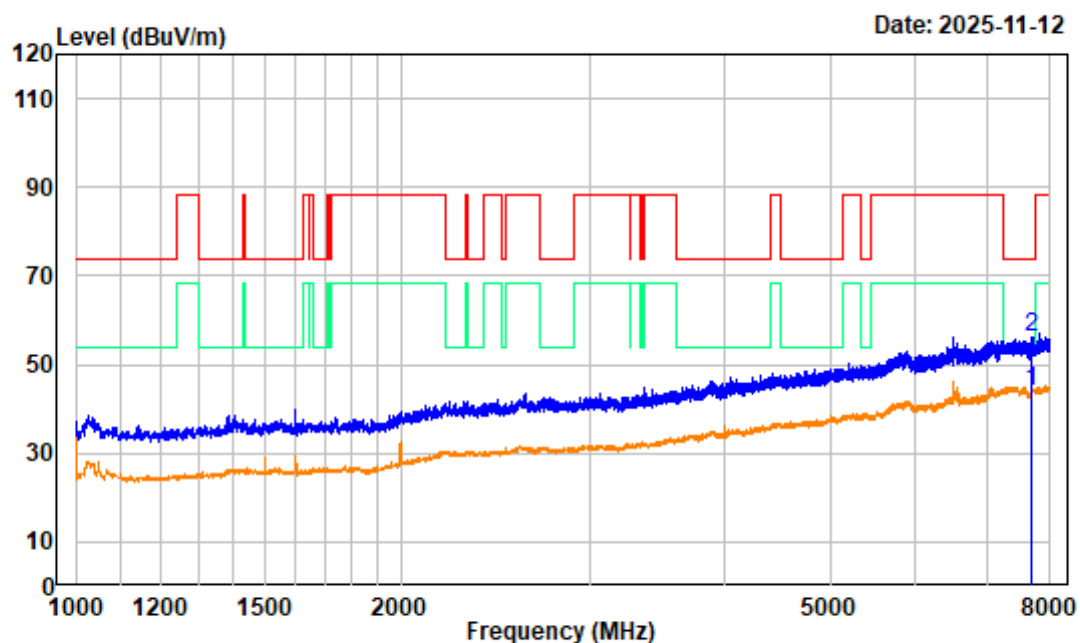

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Additional Channel 6545MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7695.500	-0.77	44.59	43.82	54.00	-10.18	average
2	7695.500	-0.77	57.11	56.34	74.00	-17.66	peak


802.11be80 Additional Channel 1GHz-8GHz_VERTICAL

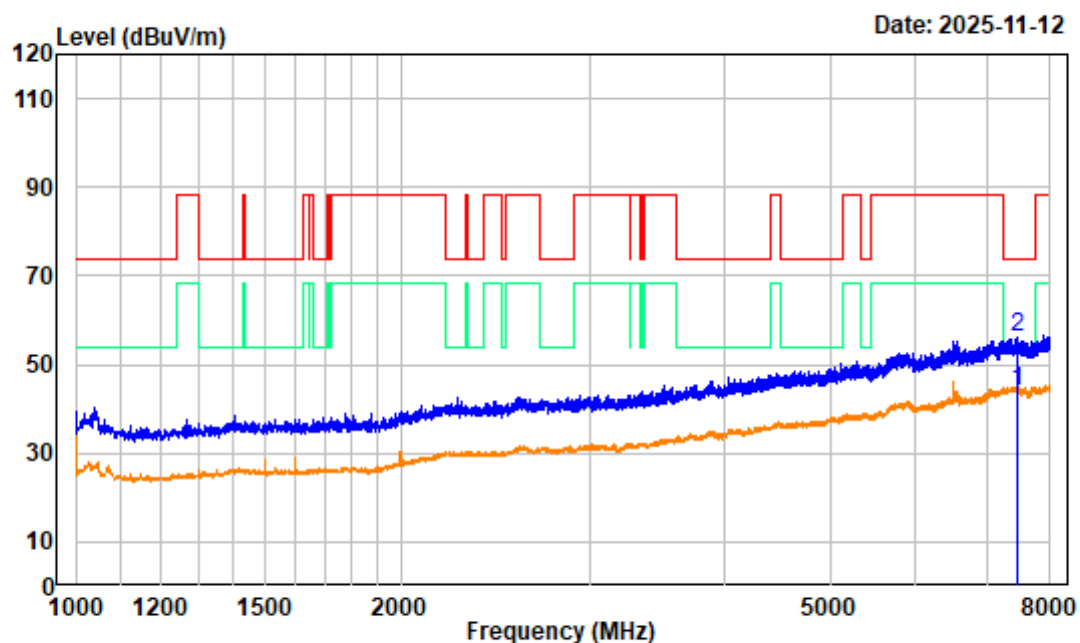

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Additional Channel 6545MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7476.750	-0.91	44.73	43.82	54.00	-10.18	average
2	7476.750	-0.91	57.01	56.10	74.00	-17.90	peak


802.11be80 Additional Channel 8GHz-18GHz_HORIZONTAL

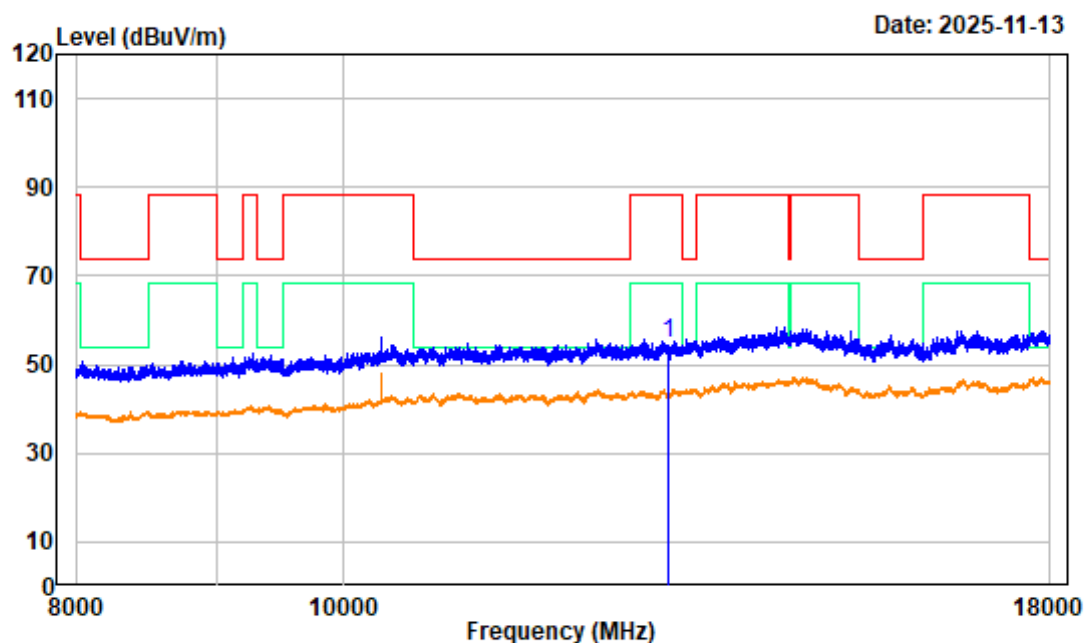

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Additional Channel 6545MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13090.000	6.41	48.28	54.69	88.20	-33.51	peak


802.11be80 Additional Channel 8GHz-18GHz_VERTICAL

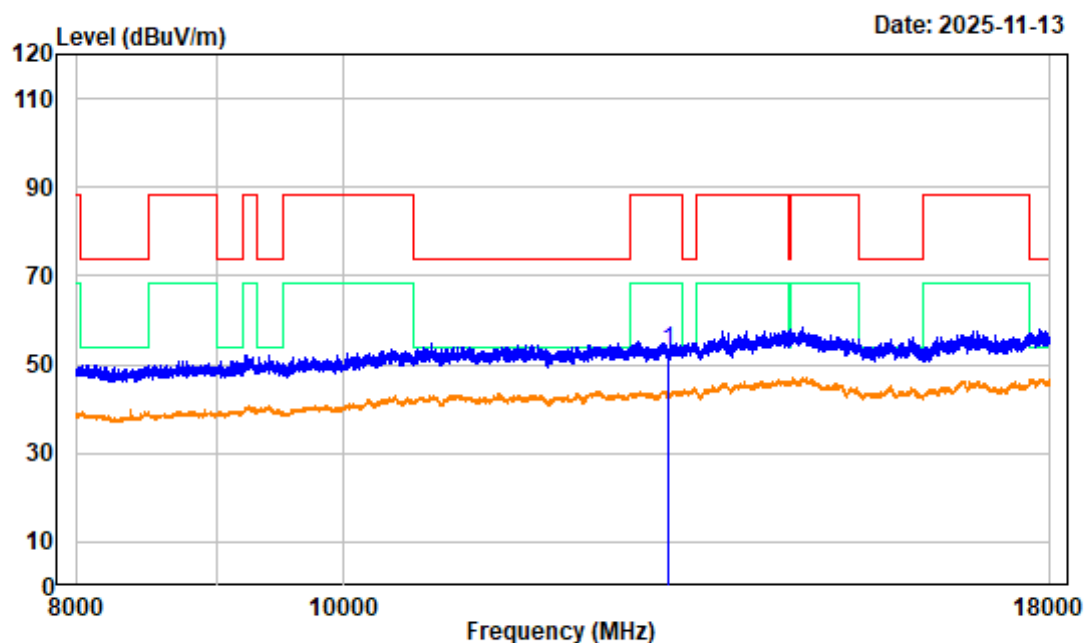

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Additional Channel 6545MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13090.000	6.41	46.42	52.83	88.20	-35.37	Peak


802.11be160 Additional Channel 1GHz-8GHz_HORIZONTAL

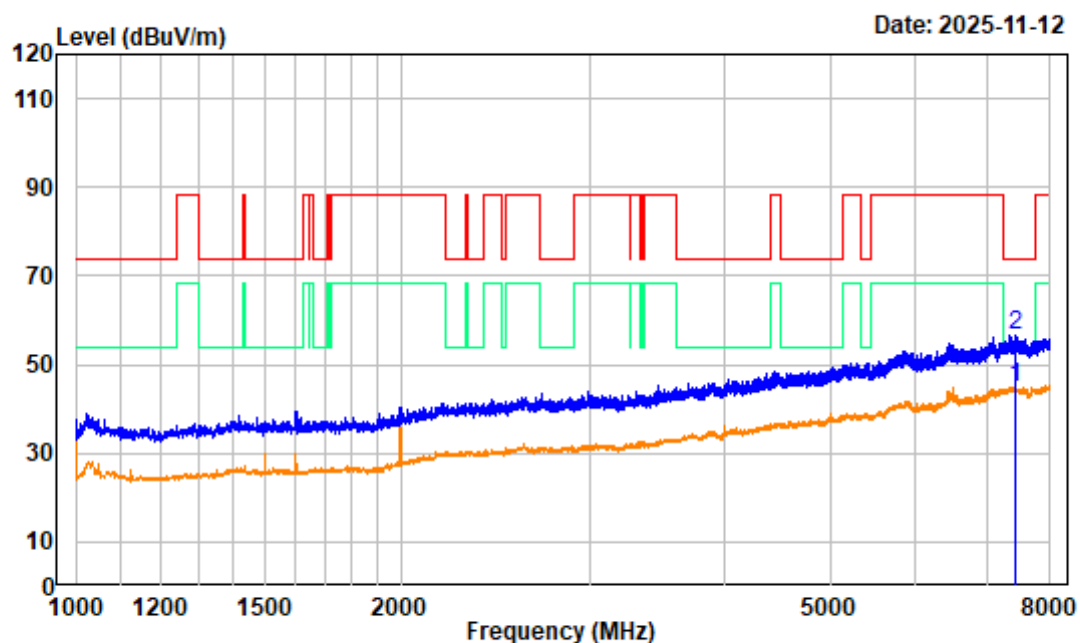

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Additional Channel 6505MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7423.375	-1.12	45.88	44.76	54.00	-9.24	average
2	7423.375	-1.12	57.82	56.70	74.00	-17.30	peak


802.11be160 Additional Channel 1GHz-8GHz_VERTICAL

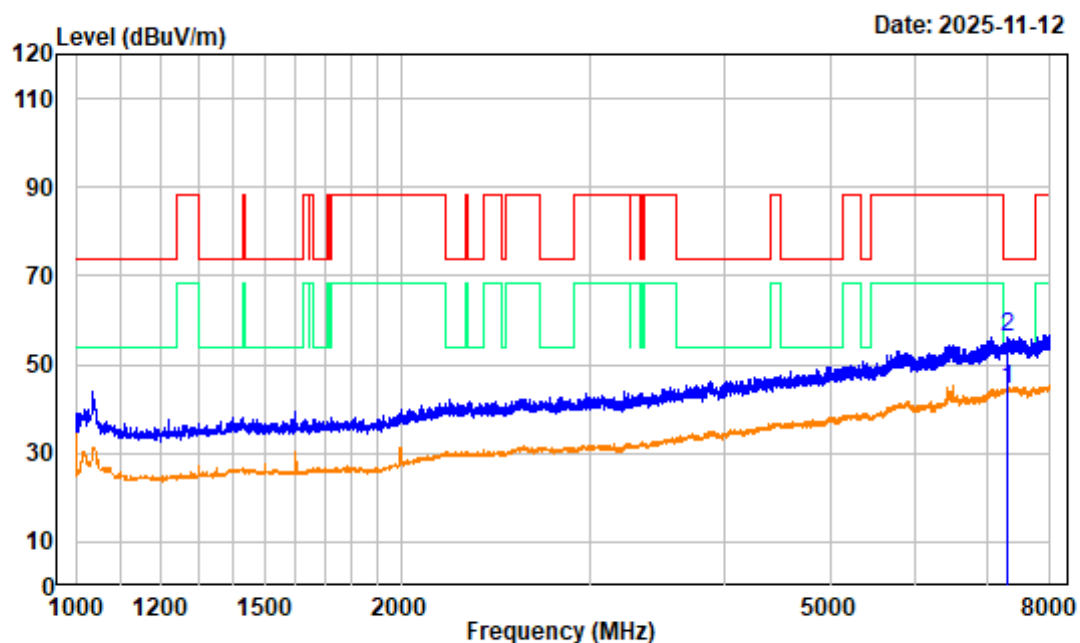

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Additional Channel 6505MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7311.375	-1.12	45.36	44.24	54.00	-9.76	average
2	7311.375	-1.12	57.20	56.08	74.00	-17.92	peak


802.11be160 Additional Channel 8GHz-18GHz_HORIZONTAL

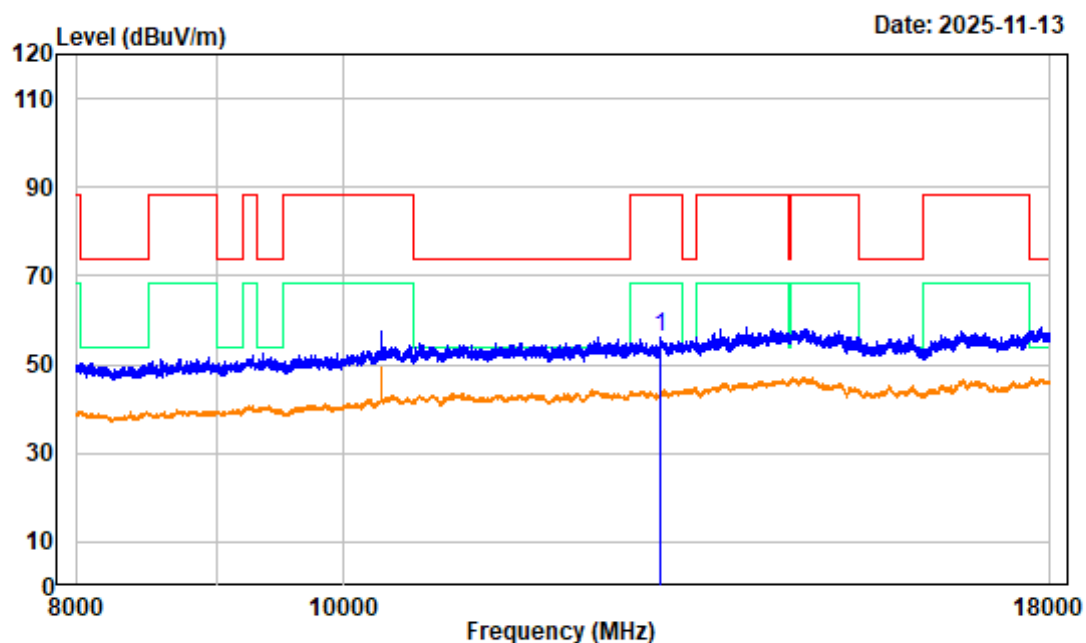

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Additional Channel 6505MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 13010.000	6.86	49.17	56.03	88.20	-32.17	Peak


802.11be160 Additional Channel 8GHz-18GHz_VERTICAL

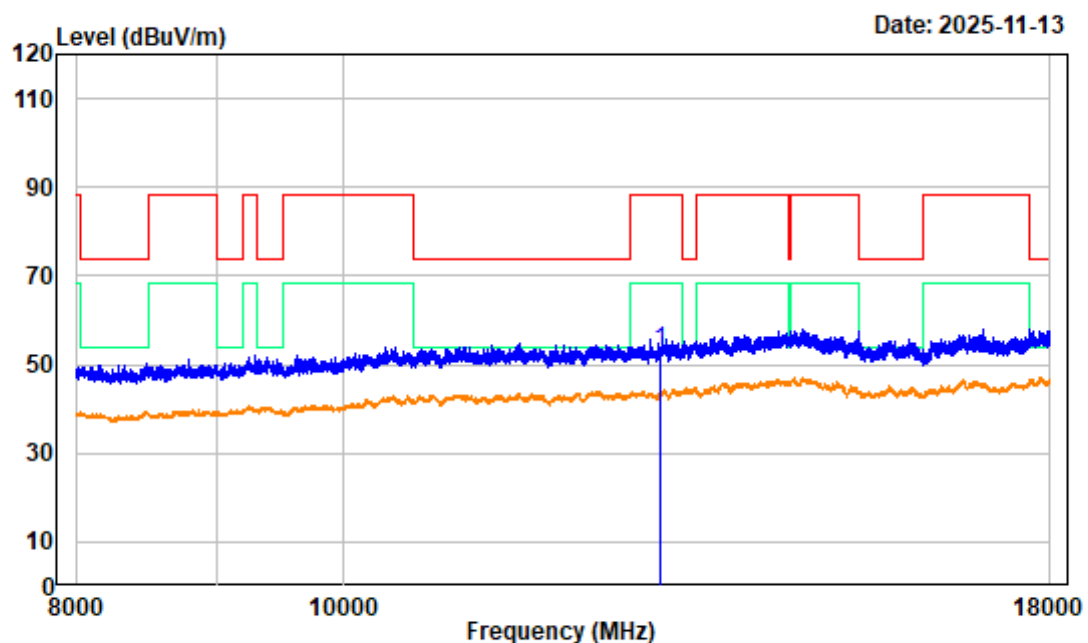

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Additional Channel 6505MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13010.000	6.86	45.97	52.83	88.20	-35.37	Peak


802.11be320 Additional Channel 1GHz-8GHz_HORIZONTAL

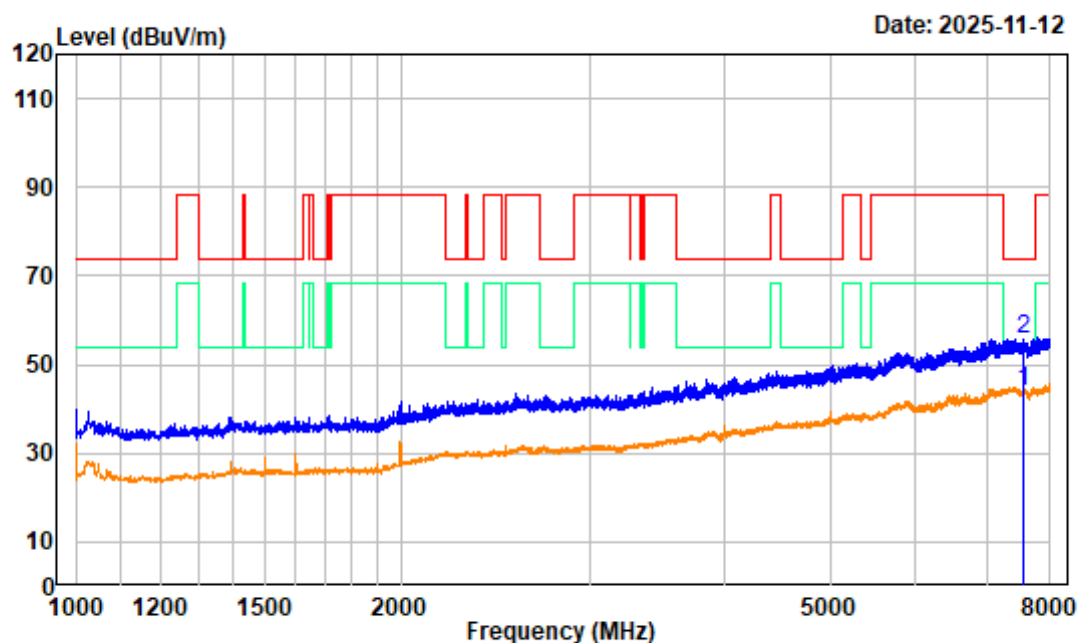

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 Additional Channel 6585MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7566.000	-1.06	44.81	43.75	54.00	-10.25	average
2	7566.000	-1.06	56.93	55.87	74.00	-18.13	peak


802.11be320 Additional Channel 1GHz-8GHz_VERTICAL

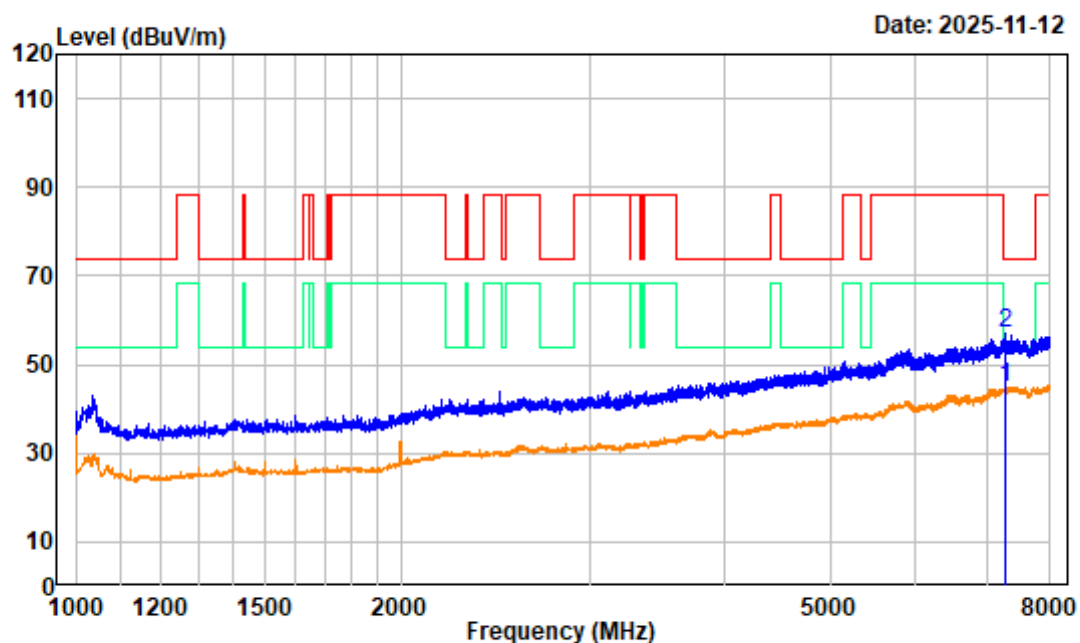

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 Additional Channel 6585MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7272.875	-1.20	46.09	44.89	54.00	-9.11	average
2	7272.875	-1.20	58.08	56.88	74.00	-17.12	peak


802.11be320 Additional Channel 8GHz-18GHz_HORIZONTAL

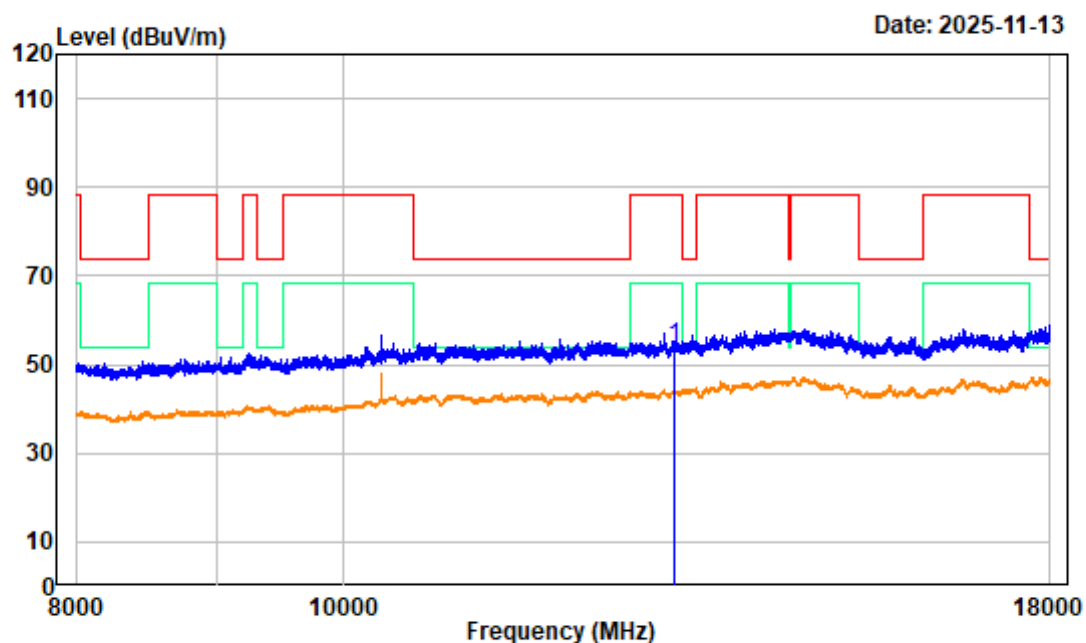

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 Additional Channel 6585MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13170.000	6.73	47.34	54.07	88.20	-34.13	Peak

802.11be320 Additional Channel 8GHz-18GHz_VERTICAL

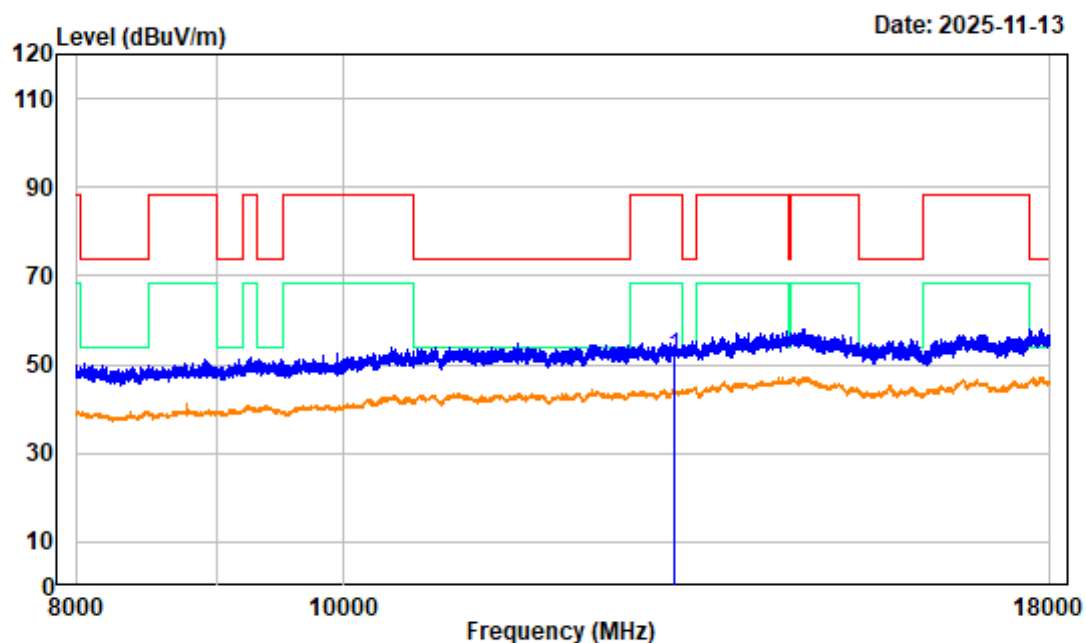


Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 Additional Channel 6585MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13170.000	6.73	44.95	51.68	88.20	-36.52	Peak

U-NII 7 Band (6525-6875 MHz)

802.11be20 Low Channel 1GHz-8GHz_HORIZONTAL

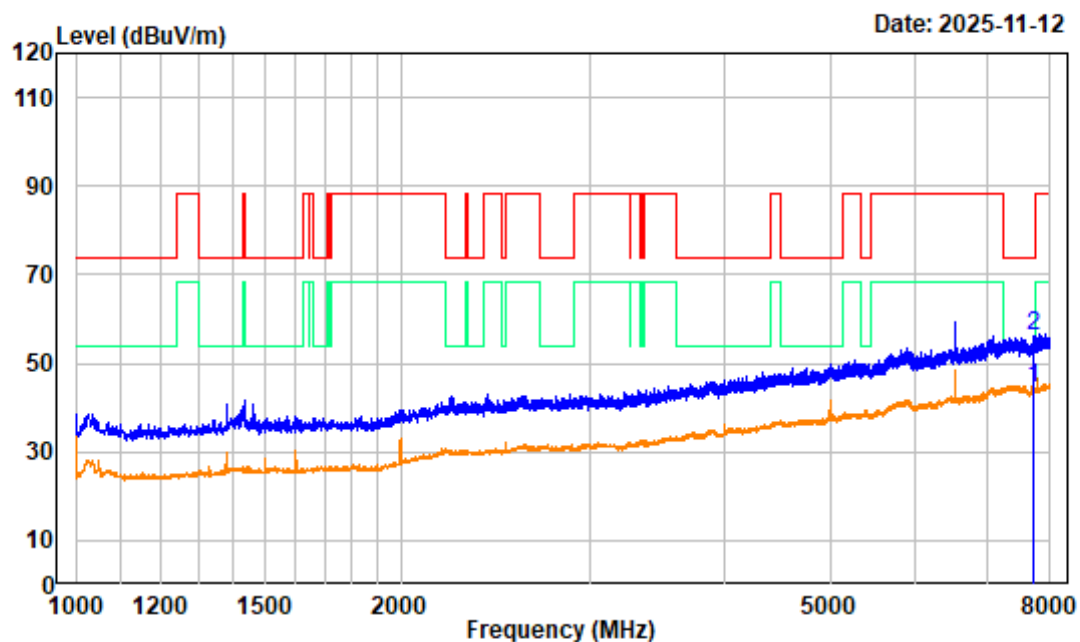

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504Z00193E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : 802.11be20 Low Channel 6535MHz 1GHz-8GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7714.750	-0.86	45.15	44.29	54.00	-9.71	average
2	7714.750	-0.86	57.00	56.14	74.00	-17.86	peak


802.11be20 Low Channel 1GHz-8GHz_VERTICAL

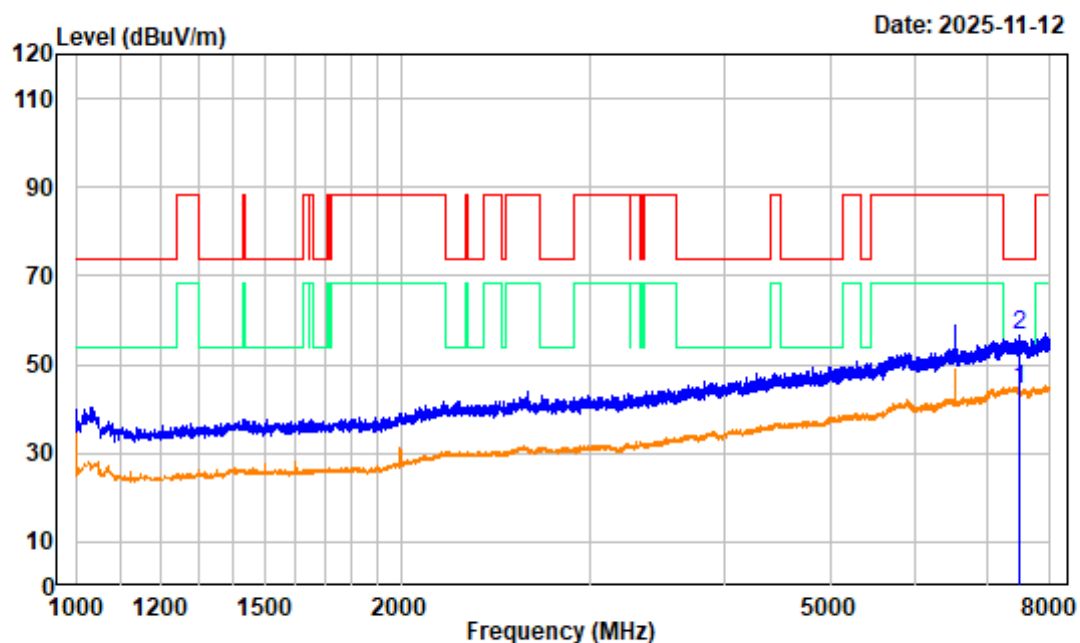

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Low Channel 6535MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7489.875	-0.91	45.09	44.18	54.00	-9.82	average
2	7489.875	-0.91	57.47	56.56	74.00	-17.44	peak


802.11be20 Low Channel 8GHz-18GHz_HORIZONTAL

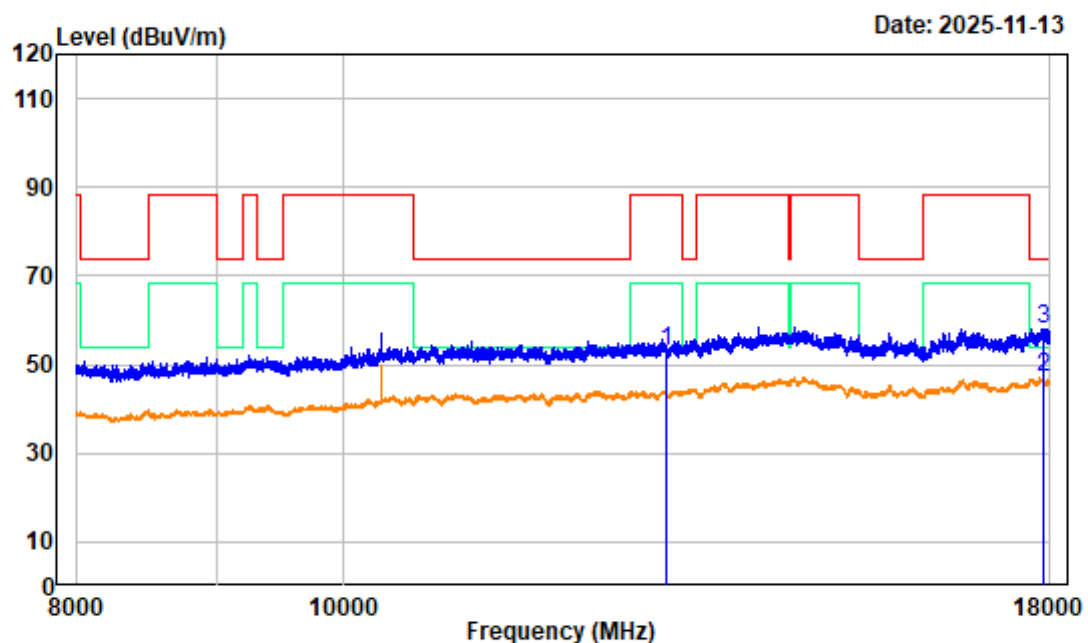

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Low Channel 6535MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13070.000	6.92	45.89	52.81	88.20	-35.39	Peak
2	17890.000	8.28	38.77	47.05	54.00	-6.95	Average
3	17890.000	8.28	49.75	58.03	74.00	-15.97	Peak


802.11be20 Low Channel 8GHz-18GHz_VERTICAL

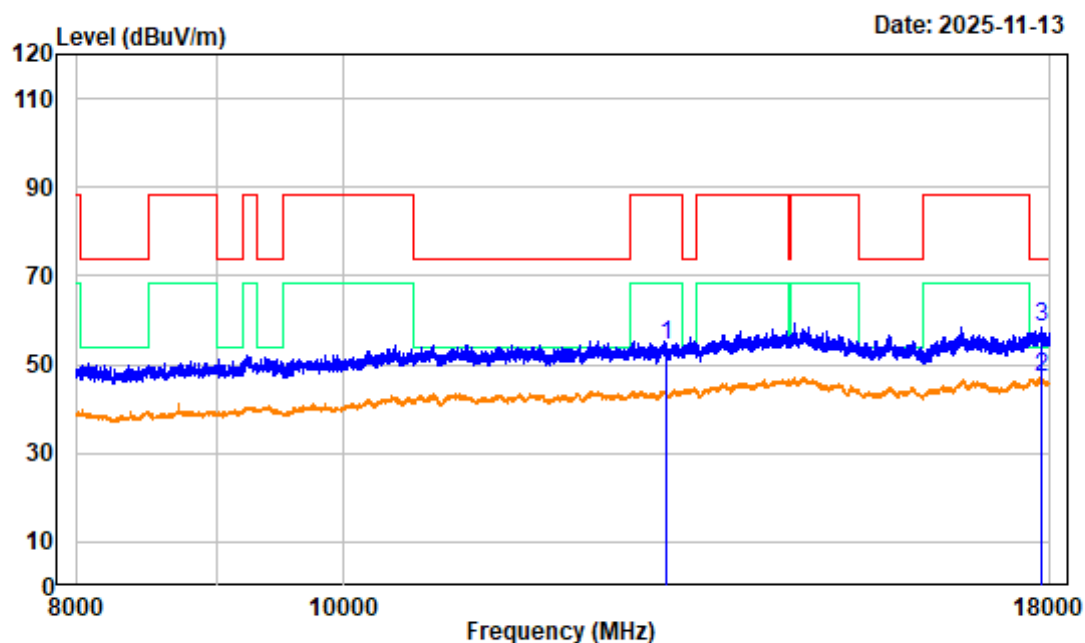

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Low Channel 6535MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13070.000	6.92	47.62	54.54	88.20	-33.66	Peak
2	17872.500	8.30	38.96	47.26	54.00	-6.74	Average
3	17872.500	8.30	49.92	58.22	74.00	-15.78	Peak


802.11be20 Middle Channel 1GHz-8GHz_HORIZONTAL

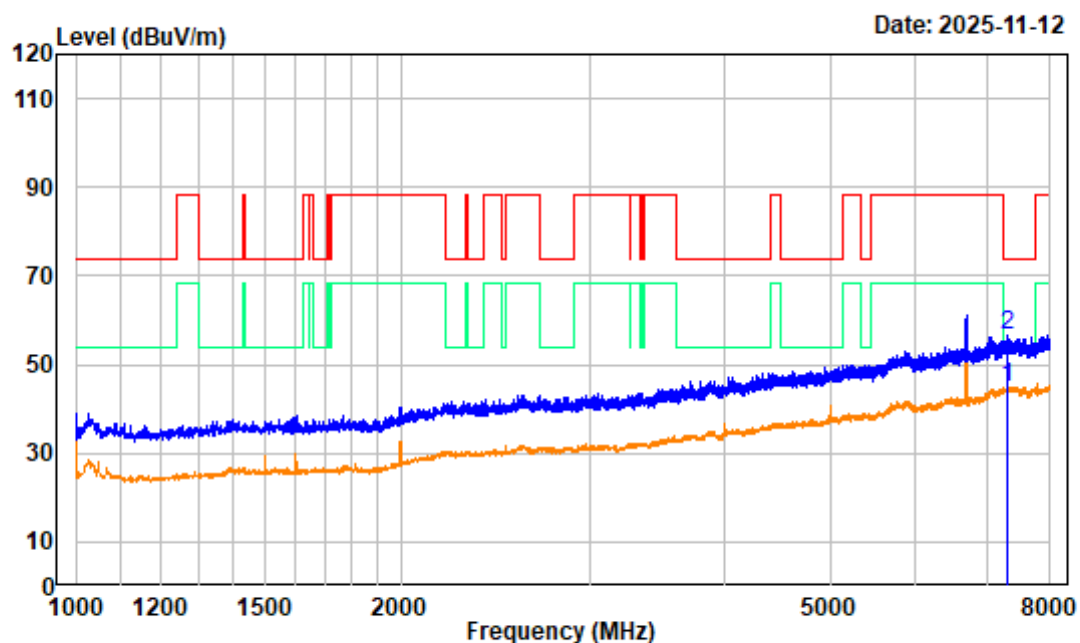

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Middle Channel 6695MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7307.875	-1.11	45.77	44.66	54.00	-9.34	average
2	7307.875	-1.11	57.73	56.62	74.00	-17.38	peak


802.11be20 Middle Channel 1GHz-8GHz_VERTICAL

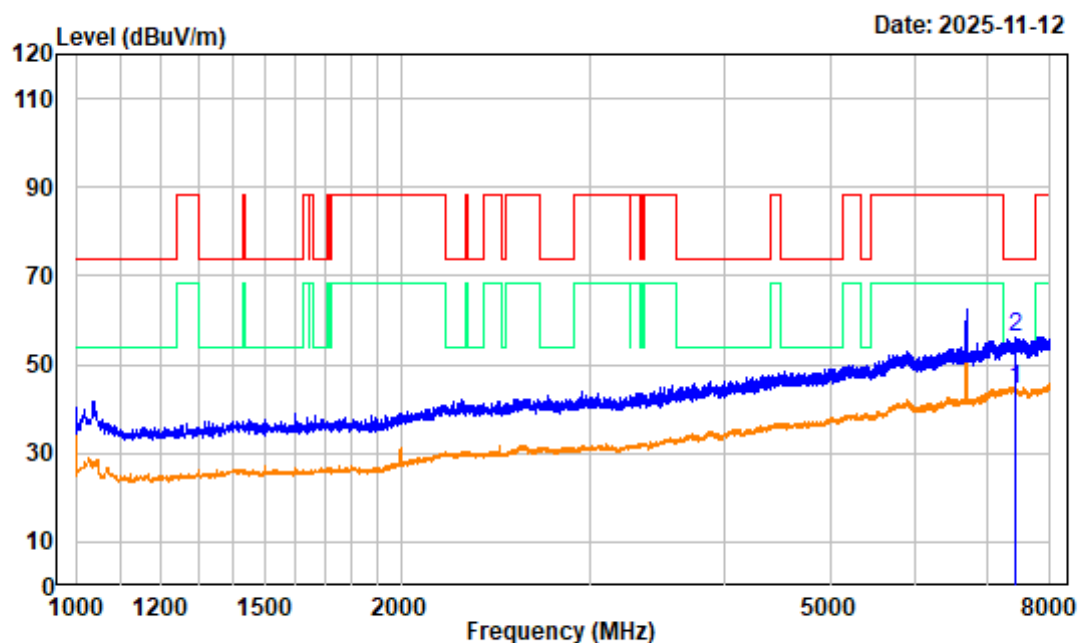

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Middle Channel 6695MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7434.750	-1.02	45.34	44.32	54.00	-9.68	average
2	7434.750	-1.02	57.37	56.35	74.00	-17.65	peak


802.11be20 Middle Channel 8GHz-18GHz_HORIZONTAL

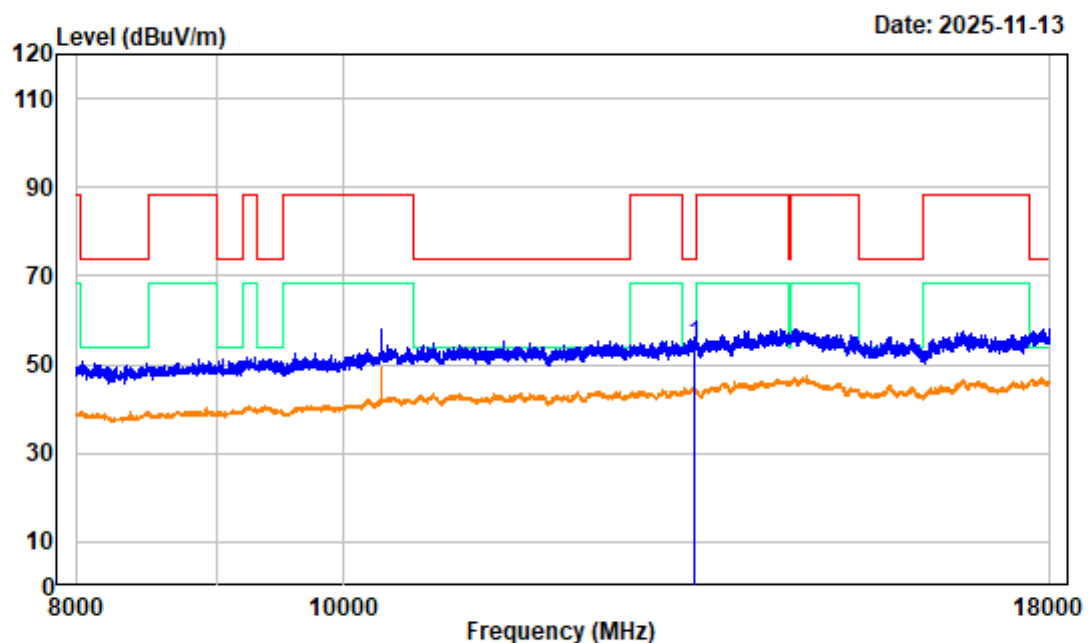

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Middle Channel 6695MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13390.000	7.07	47.23	54.30	74.00	-19.70	Peak


802.11be20 Middle Channel 8GHz-18GHz_VERTICAL

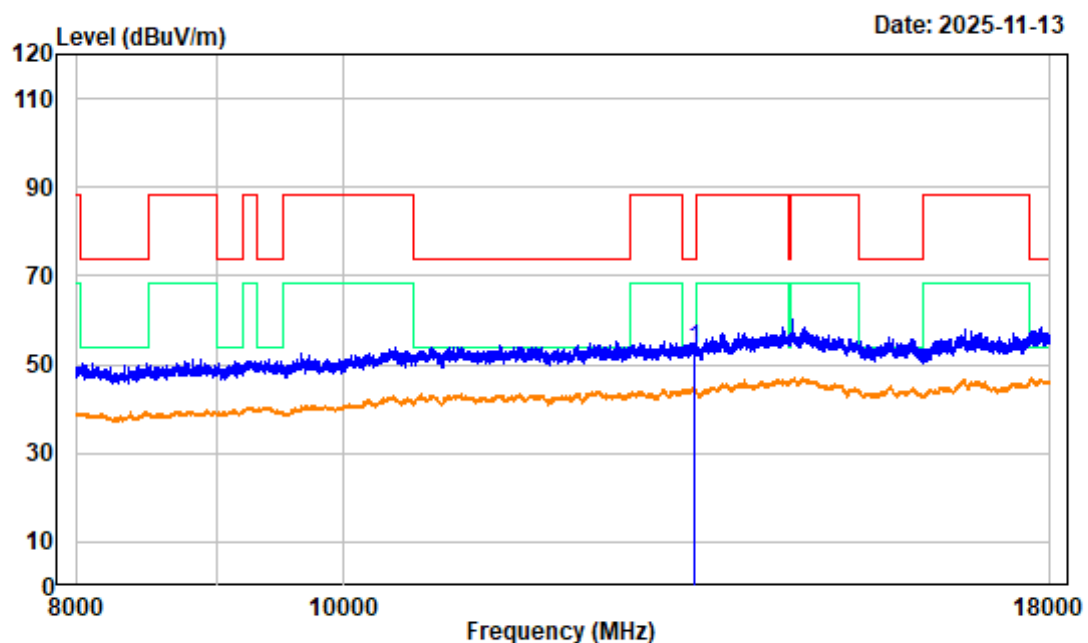

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Middle Channel 6695MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13390.000	7.07	46.57	53.64	74.00	-20.36	Peak


802.11be20 High Channel 1GHz-8GHz_HORIZONTAL

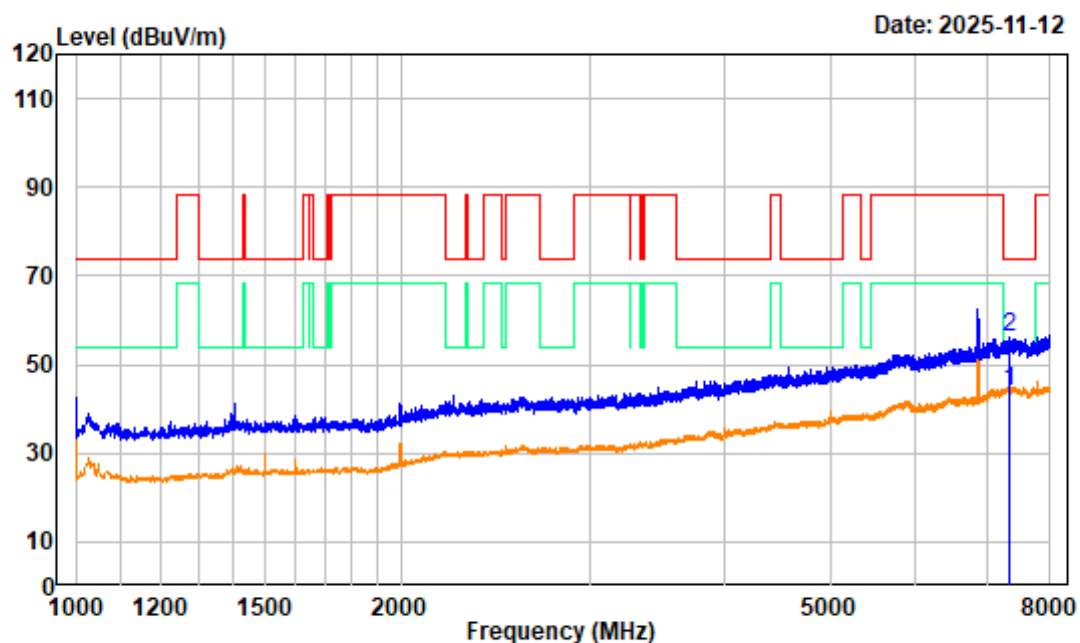

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 High Channel 6855MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7324.500	-1.17	45.26	44.09	54.00	-9.91	average
2	7324.500	-1.17	57.17	56.00	74.00	-18.00	peak


802.11be20 High Channel 1GHz-8GHz_VERTICAL

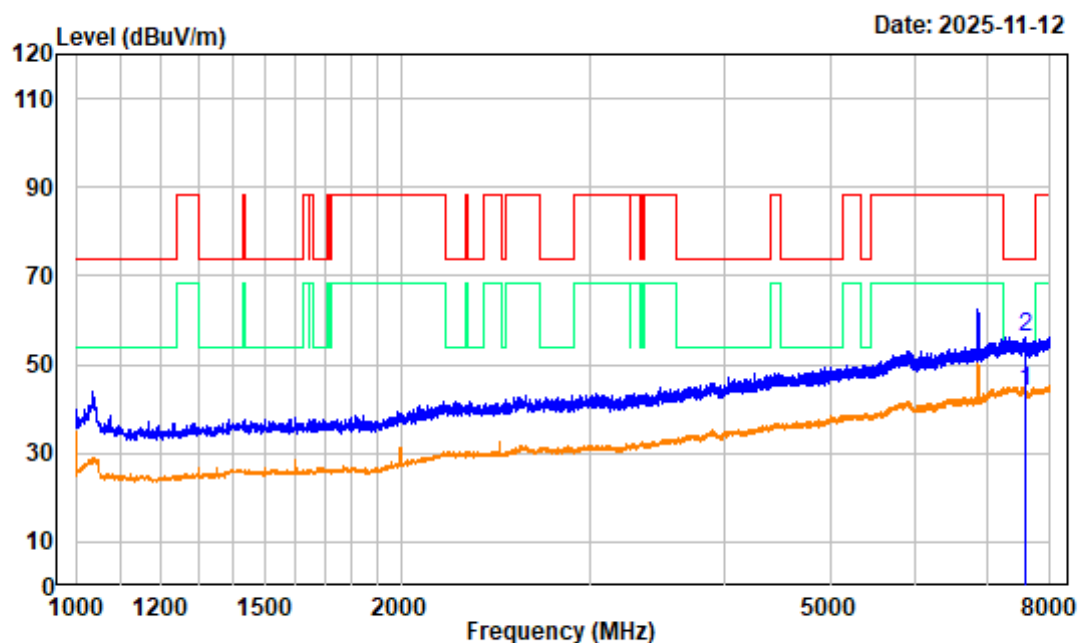

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 High Channel 6855MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7593.125	-1.25	45.37	44.12	54.00	-9.88	average
2	7593.125	-1.25	57.41	56.16	74.00	-17.84	peak


802.11be20 High Channel 8GHz-18GHz_HORIZONTAL

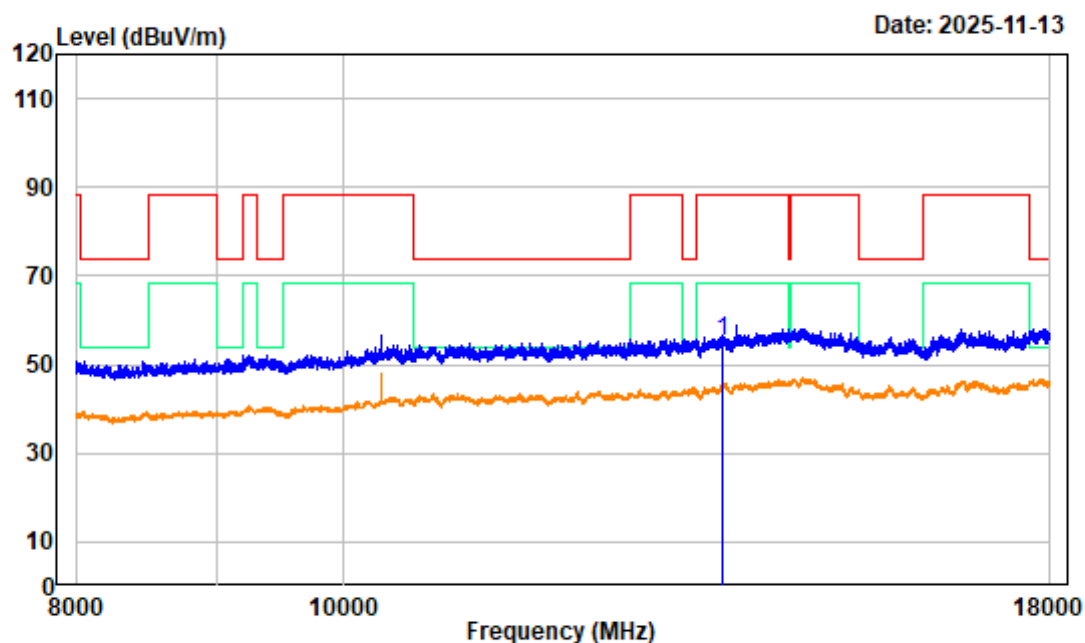

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 High Channel 6855MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13710.000	8.05	47.15	55.20	88.20	-33.00	Peak


802.11be20 High Channel 8GHz-18GHz_VERTICAL

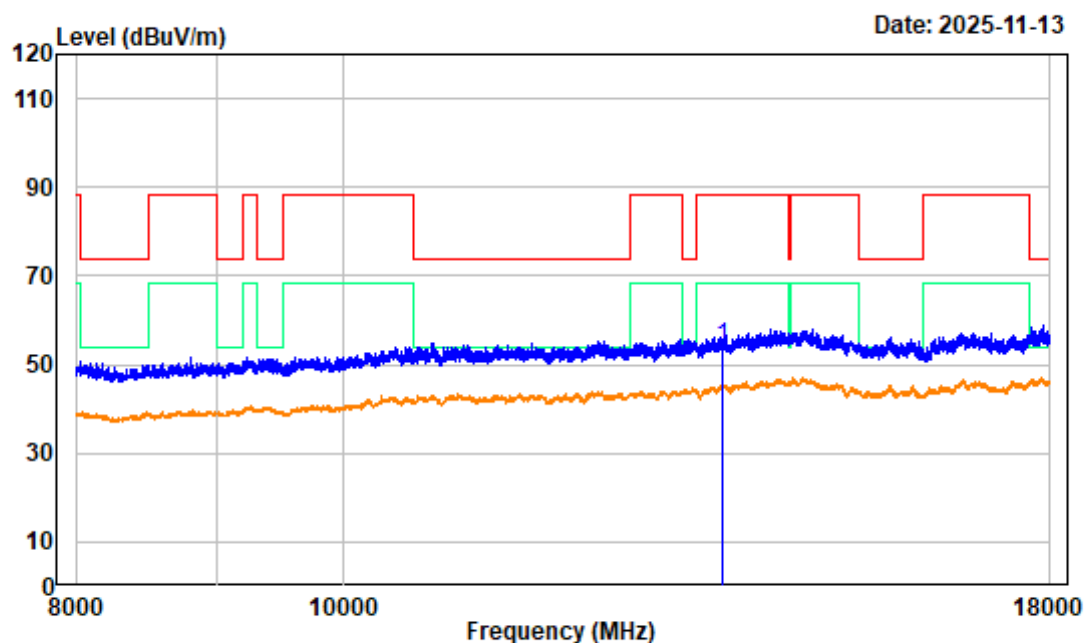

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 High Channel 6855MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13710.000	8.05	45.90	53.95	88.20	-34.25	Peak

802.11be40 Low Channel 1GHz-8GHZ_HORIZONTAL

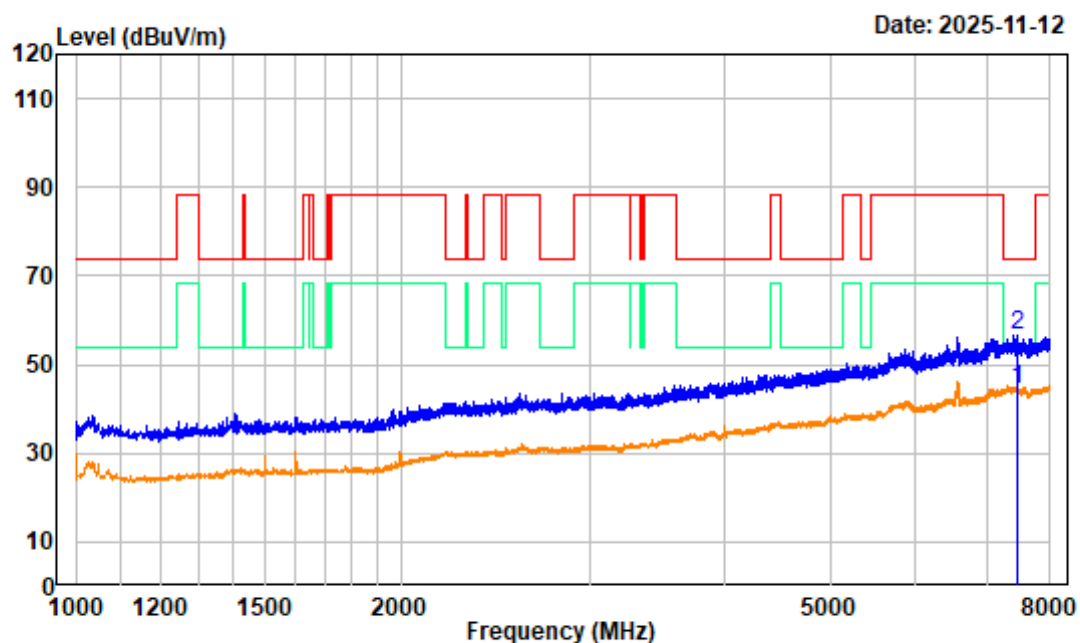

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504Z00193E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : 802.11be40 Low Channel 6565MHz 1GHz-8GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7462.750	-0.90	45.35	44.45	54.00	-9.55	average
2	7462.750	-0.90	57.40	56.50	74.00	-17.50	peak


802.11be40 Low Channel 1GHz-8GHZ_VERTICAL

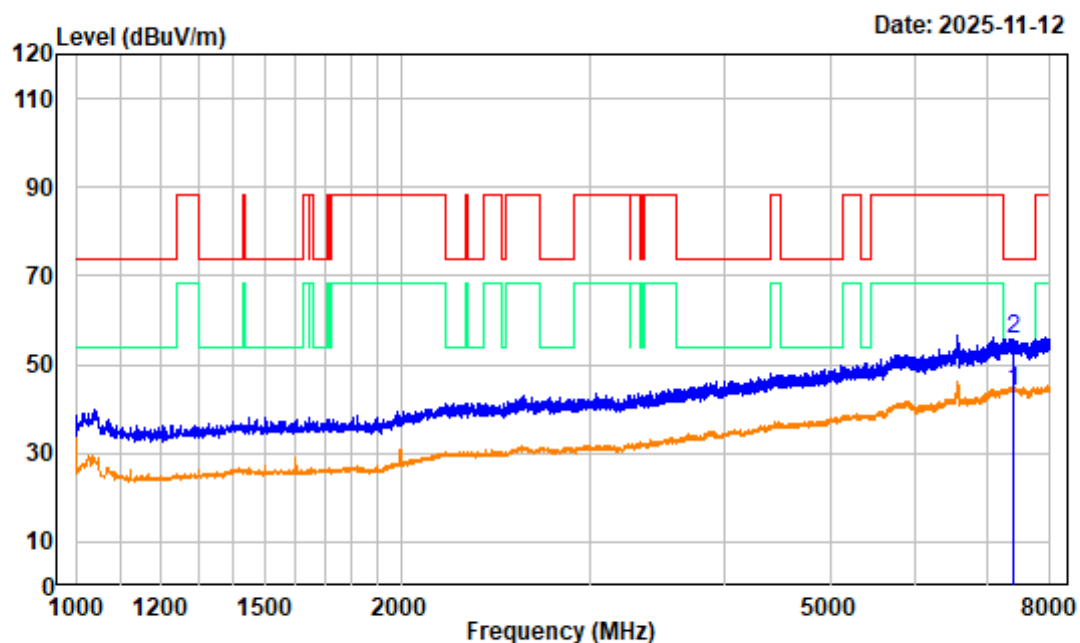

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Low Channel 6565MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7393.625	-1.32	45.36	44.04	54.00	-9.96	average
2	7393.625	-1.32	57.00	55.68	74.00	-18.32	peak


802.11be40 Low Channel 8GHz-18GHZ_HORIZONTAL

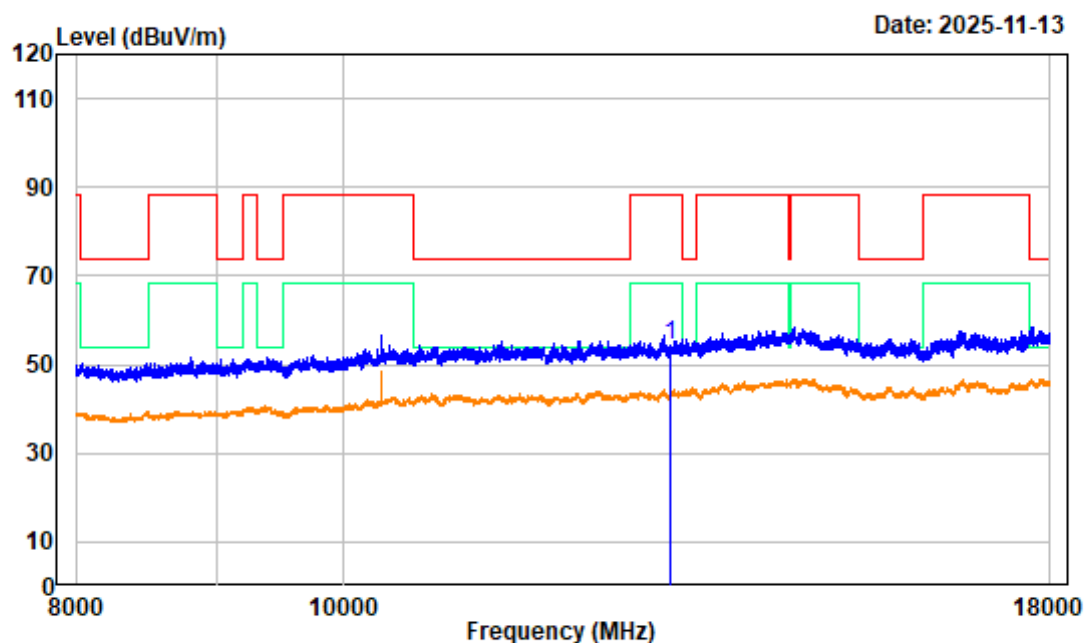

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Low Channel 6565MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13130.000	6.48	47.74	54.22	88.20	-33.98	peak


802.11be40 Low Channel 8GHz-18GHZ_VERTICAL

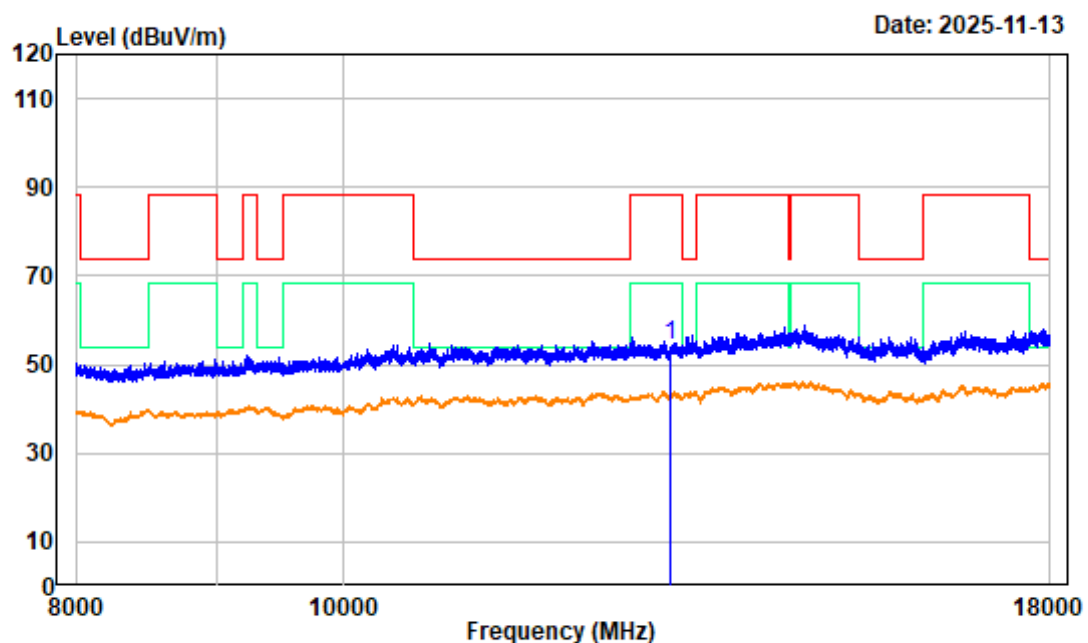

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Low Channel 6565MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13130.000	6.48	47.99	54.47	88.20	-33.73	peak


802.11be40 Middle Channel 1GHz-8GHz_HORIZONTAL

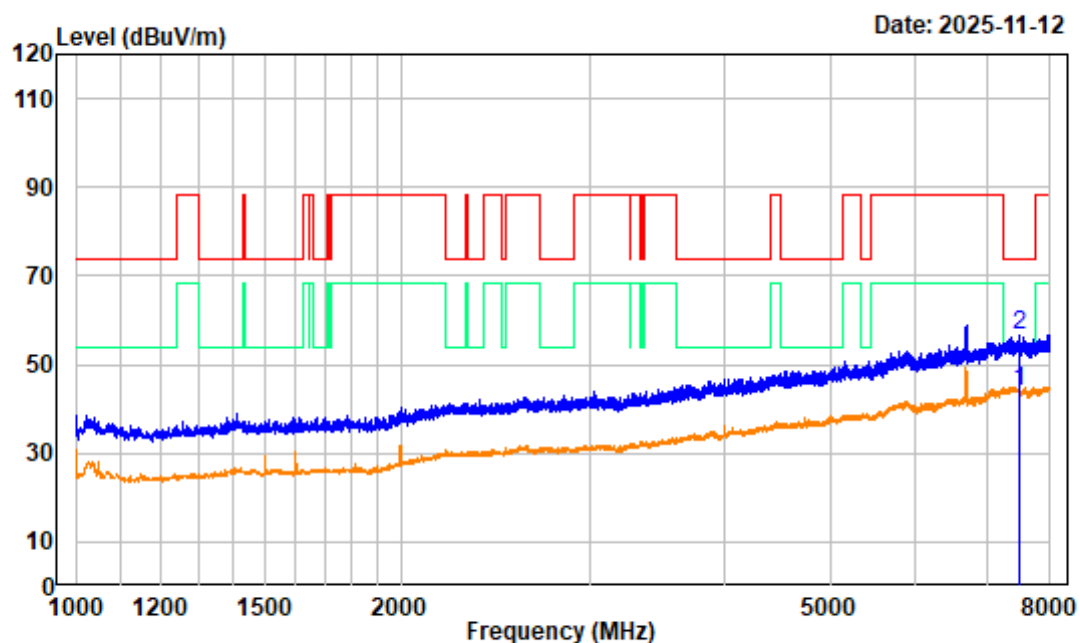

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Middle Channel 6685MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7503.000	-0.92	44.82	43.90	54.00	-10.10	average
2	7503.000	-0.92	57.38	56.46	74.00	-17.54	peak


802.11be40 Middle Channel 1GHz-8GHz_VERTICAL

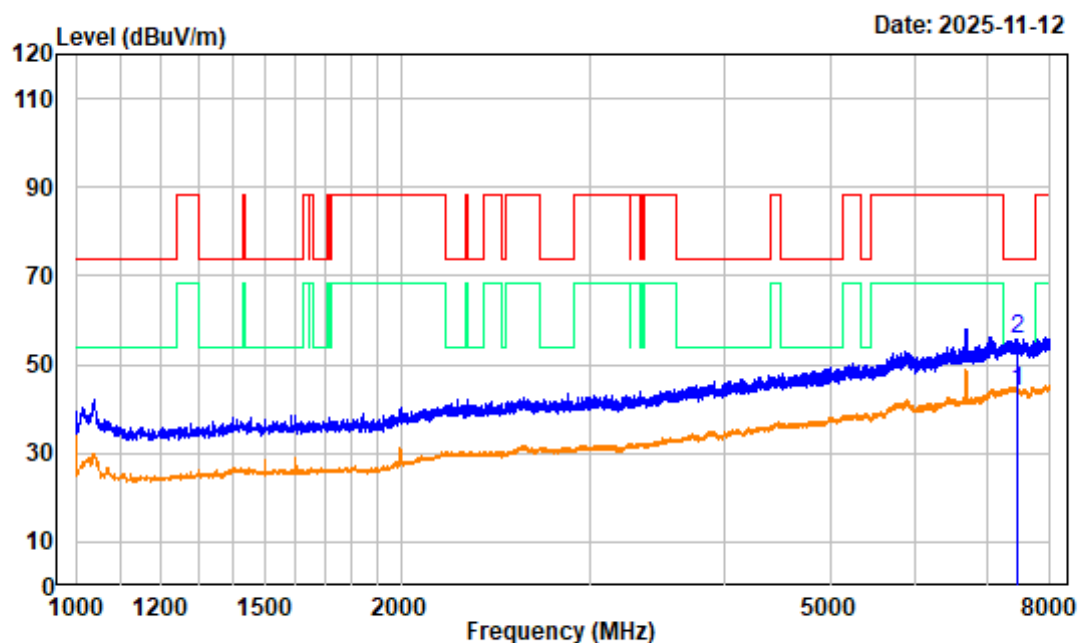

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Middle Channel 6685MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7472.375	-0.90	45.03	44.13	54.00	-9.87	average
2	7472.375	-0.90	56.75	55.85	74.00	-18.15	peak


802.11be40 Middle Channel 8GHz-18GHz_HORIZONTAL

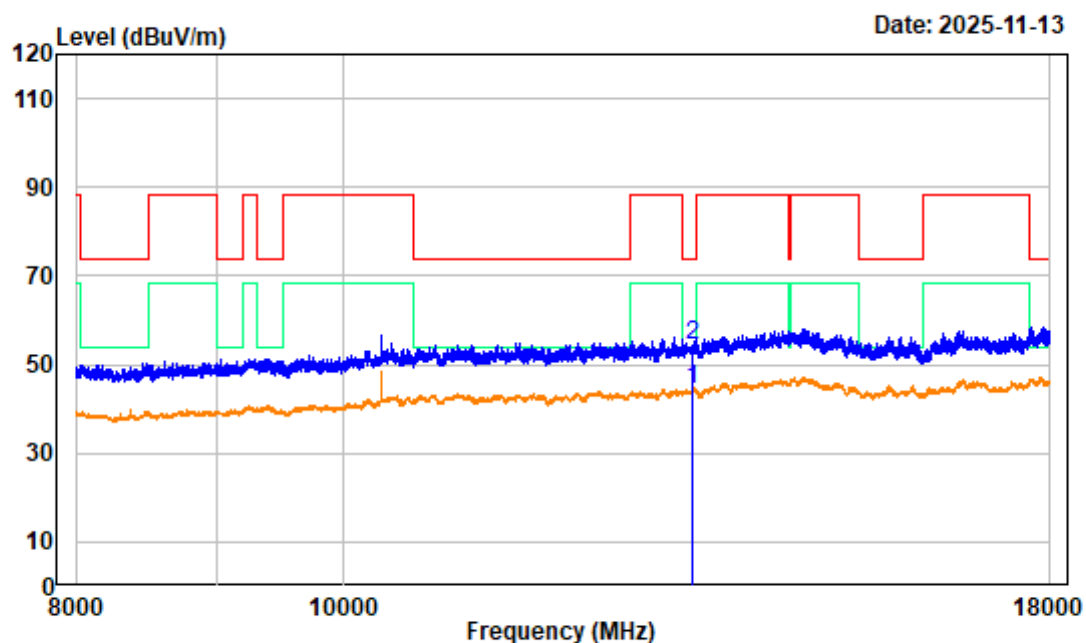

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Middle Channel 6685MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 13370.000	7.03	37.34	44.37	54.00	-9.63	Average
2 13370.000	7.03	47.35	54.38	74.00	-19.62	Peak


802.11be40 Middle Channel 8GHz-18GHz_VERTICAL

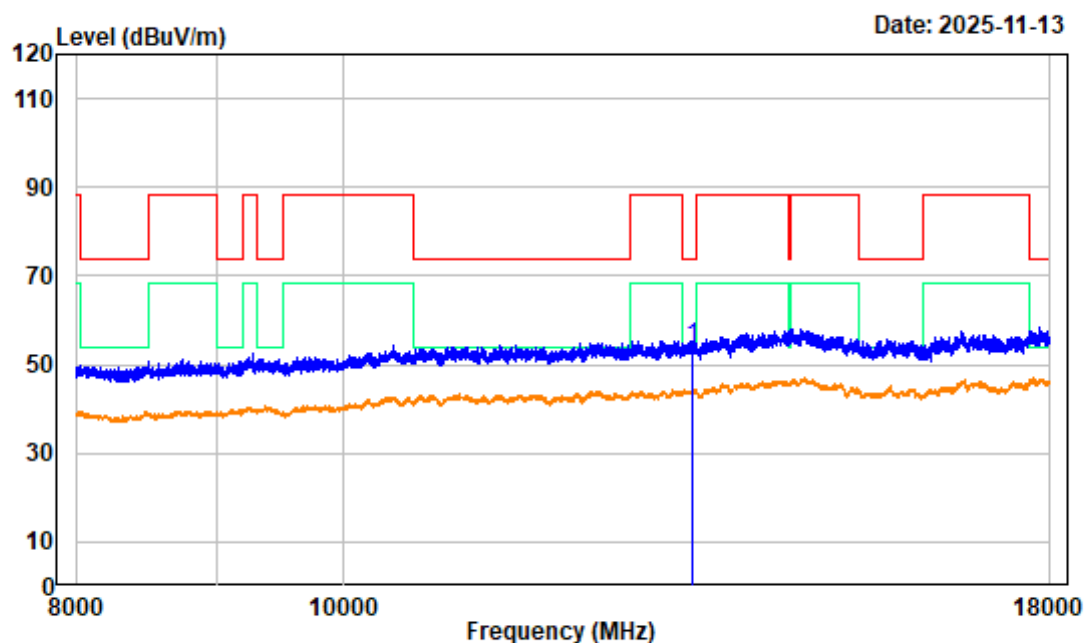

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Middle Channel 6685MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13370.000	7.03	46.63	53.66	74.00	-20.34	Peak


802.11be40 High Channel 1GHz-8GHz_HORIZONTAL

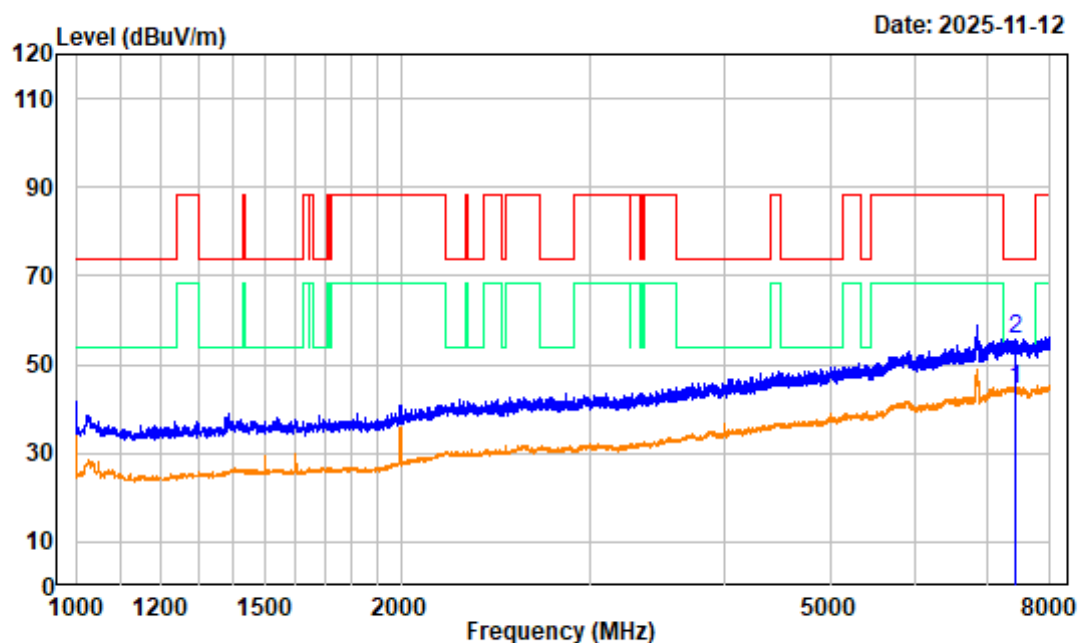

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 High Channel 6845MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7440.000	-0.97	45.35	44.38	54.00	-9.62	average
2	7440.000	-0.97	56.87	55.90	74.00	-18.10	peak


802.11be40 High Channel 1GHz-8GHz_VERTICAL

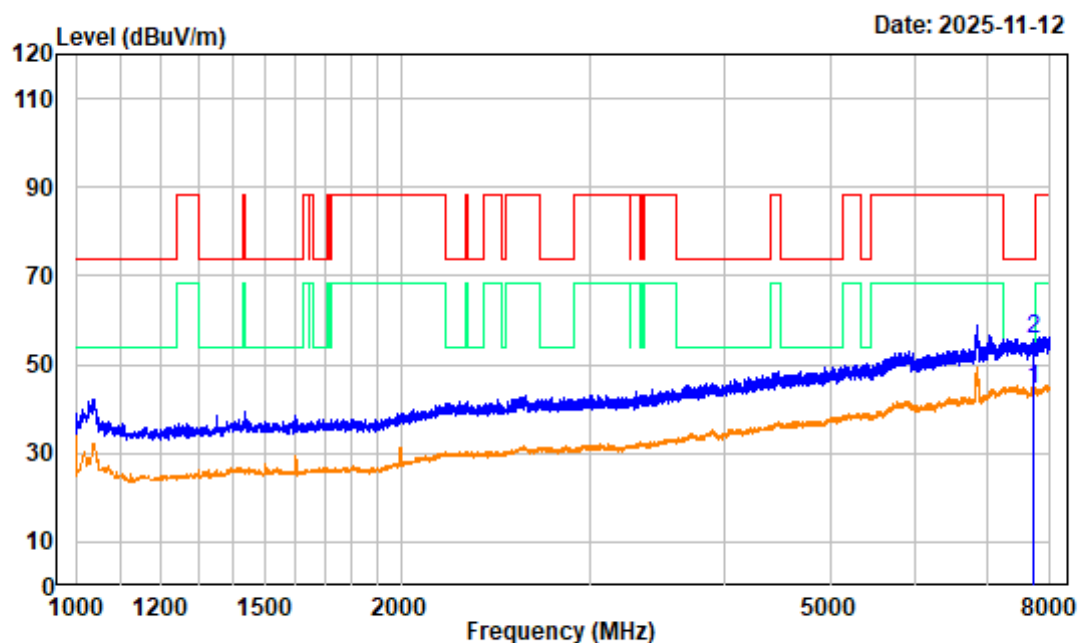

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 High Channel 6845MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7725.250	-0.99	45.38	44.39	54.00	-9.61	average
2	7725.250	-0.99	56.64	55.65	74.00	-18.35	peak


802.11be40 High Channel 8GHz-18GHz_HORIZONTAL

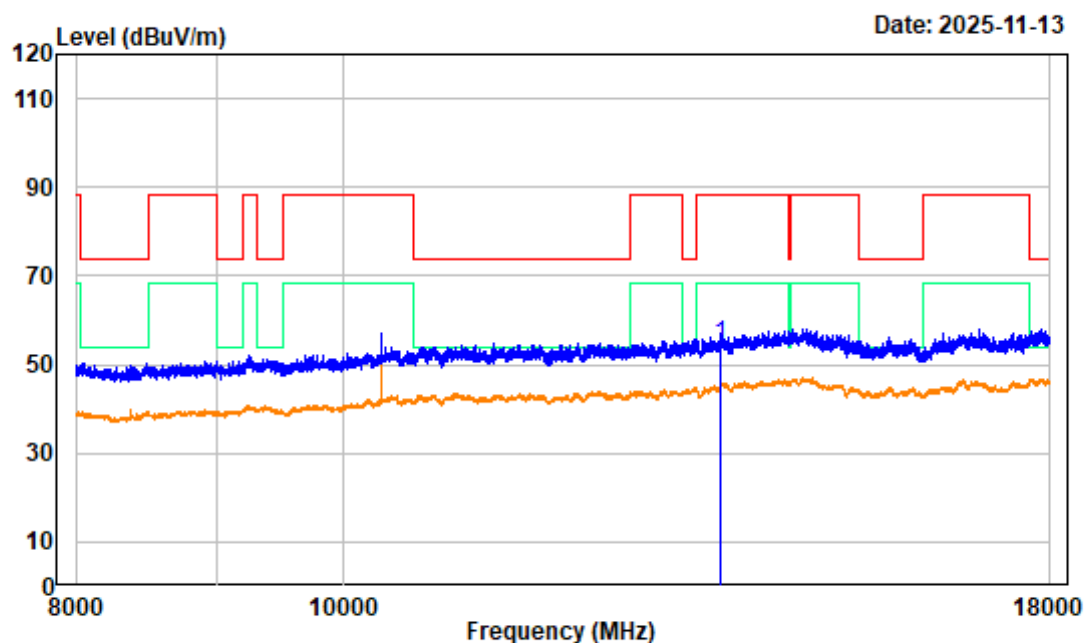

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 High Channel 6845MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13690.000	7.95	46.52	54.47	88.20	-33.73	Peak


802.11be40 High Channel 8GHz-18GHz_VERTICAL

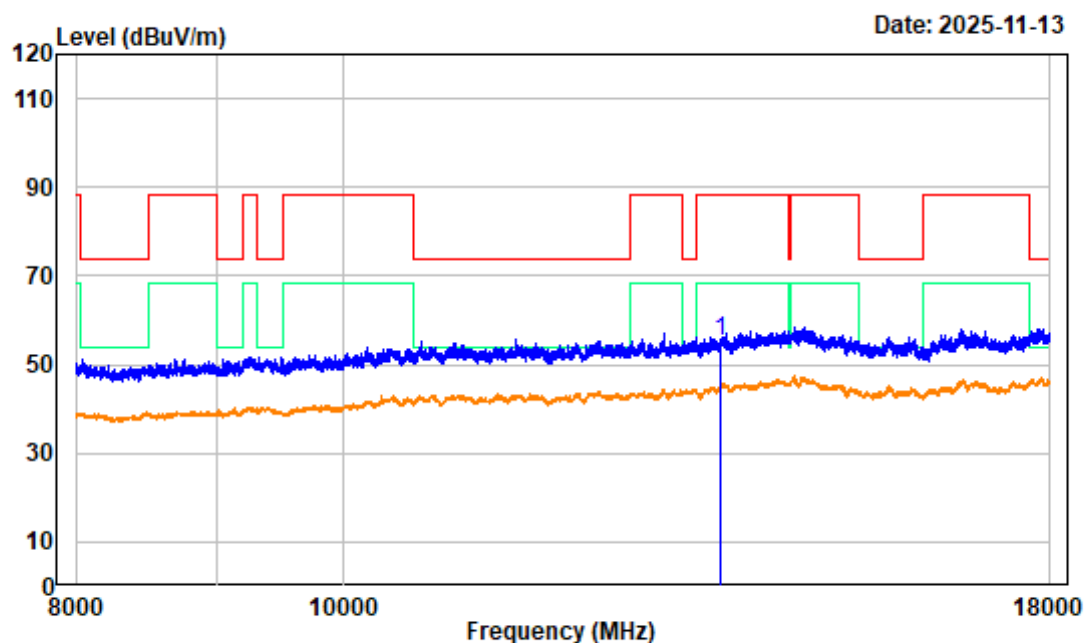

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 High Channel 6845MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13690.000	7.95	47.50	55.45	88.20	-32.75	Peak


802.11be80 Low Channel 1GHz-8GHz_HORIZONTAL

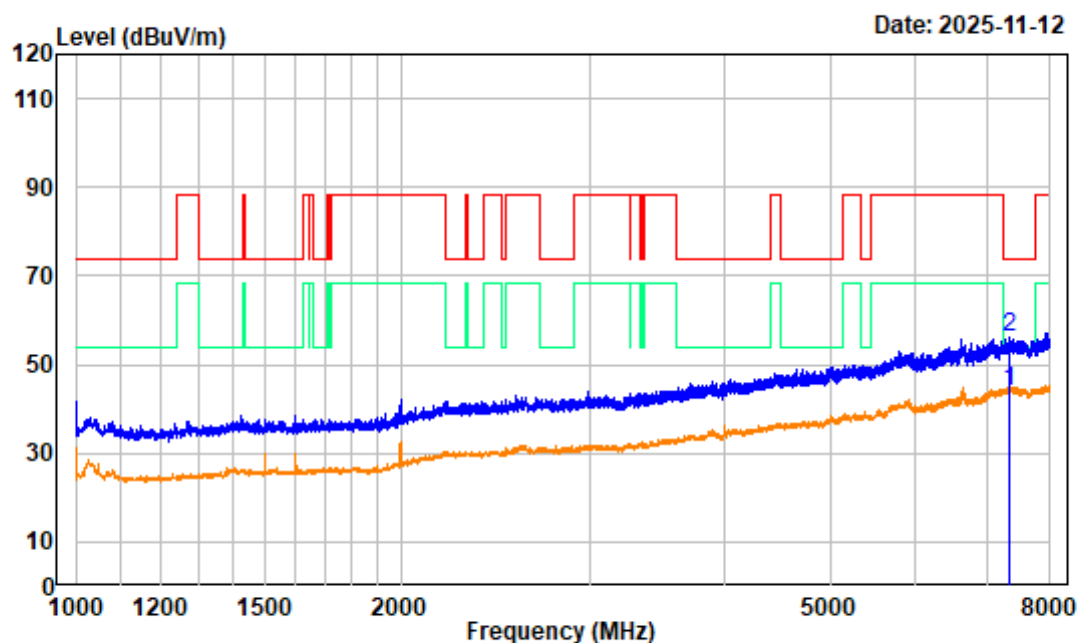

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester: Kevin Lv
 Note : 802.11be80 Low Channel 6625MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7322.750	-1.16	45.26	44.10	54.00	-9.90	average
2	7322.750	-1.16	57.29	56.13	74.00	-17.87	peak


802.11be80 Low Channel 1GHz-8GHz_VERTICAL

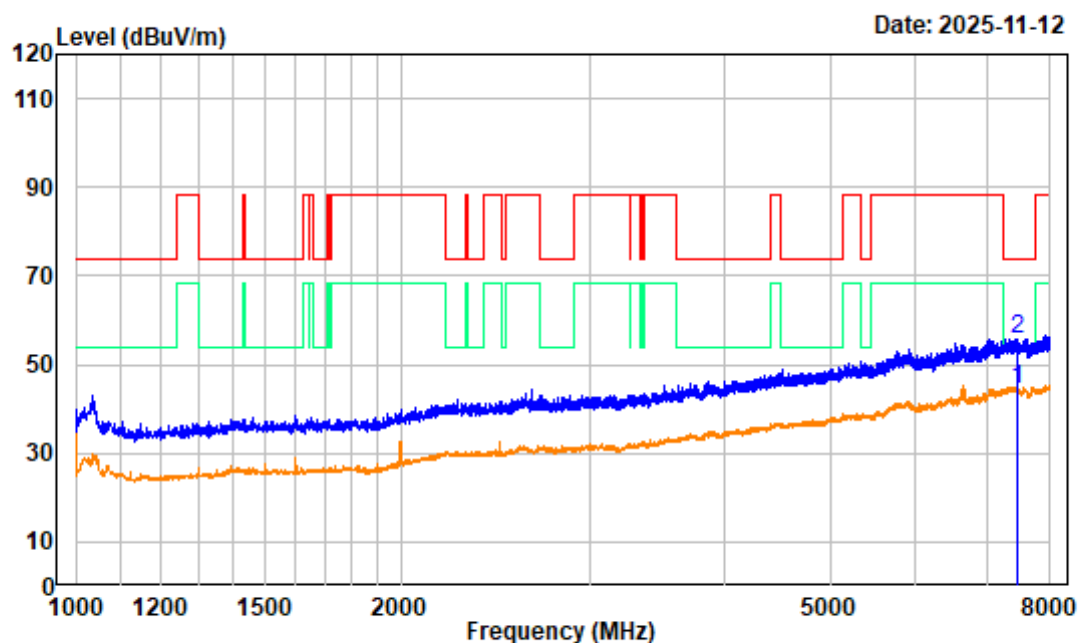

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Low Channel 6625MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7463.625	-0.89	45.24	44.35	54.00	-9.65	average
2	7463.625	-0.89	56.69	55.80	74.00	-18.20	peak


802.11be80 Low Channel 8GHz-18GHz_HORIZONTAL

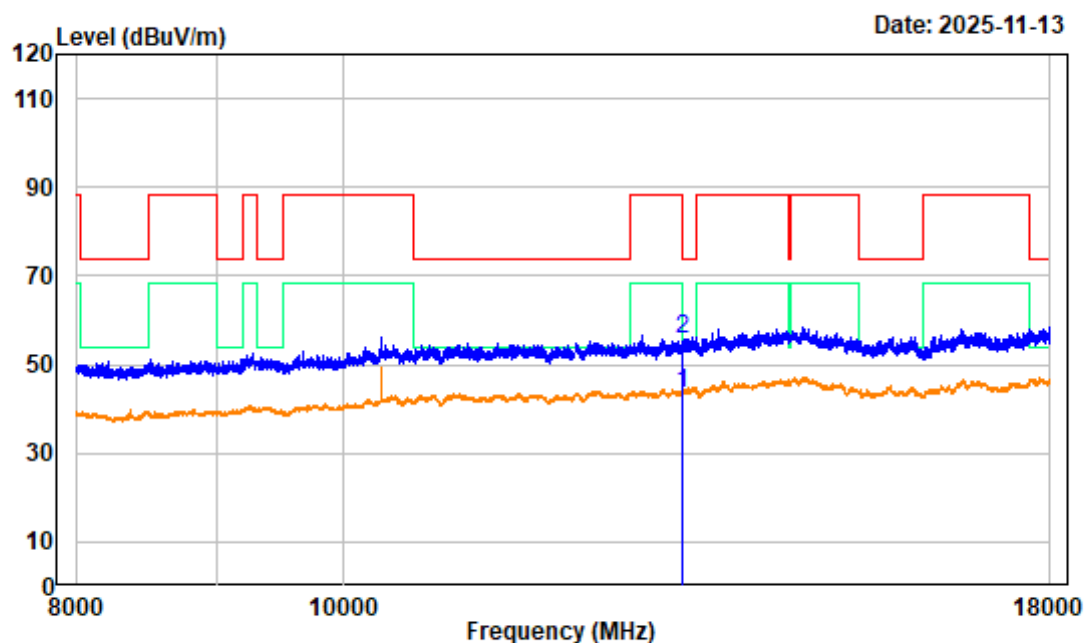

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Low Channel 6625MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 13250.000	6.77	36.74	43.51	54.00	-10.49	Average
2 13250.000	6.77	48.95	55.72	74.00	-18.28	peak


802.11be80 Low Channel 8GHz-18GHz_VERTICAL

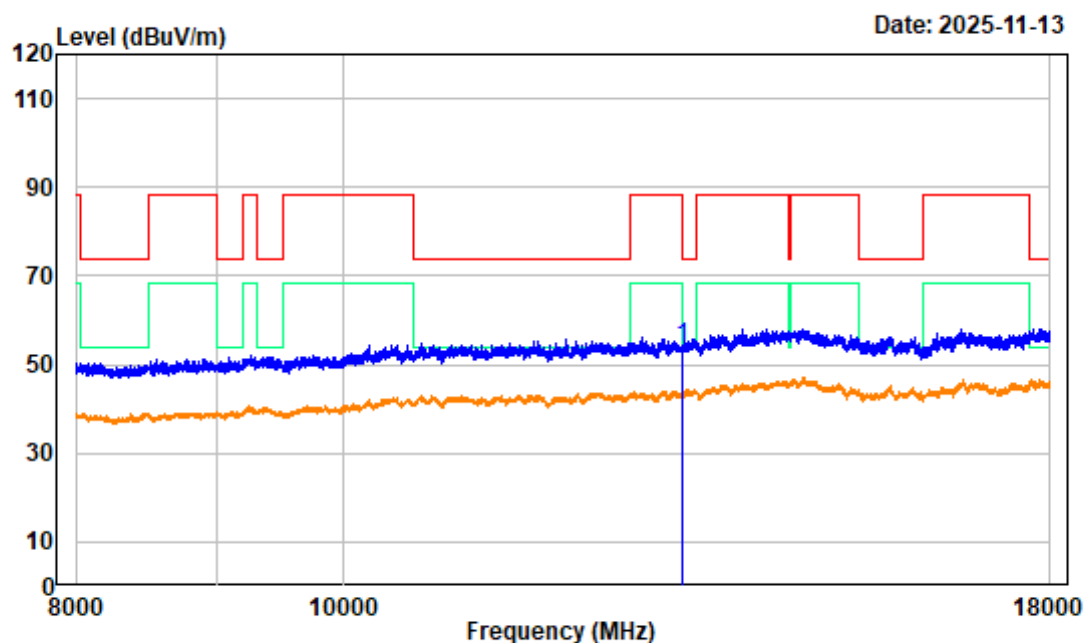

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Low Channel 6625MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13250.000	6.77	47.18	53.95	74.00	-20.05	Peak


802.11be80 Middle Channel 1GHz-8GHz_HORIZONTAL

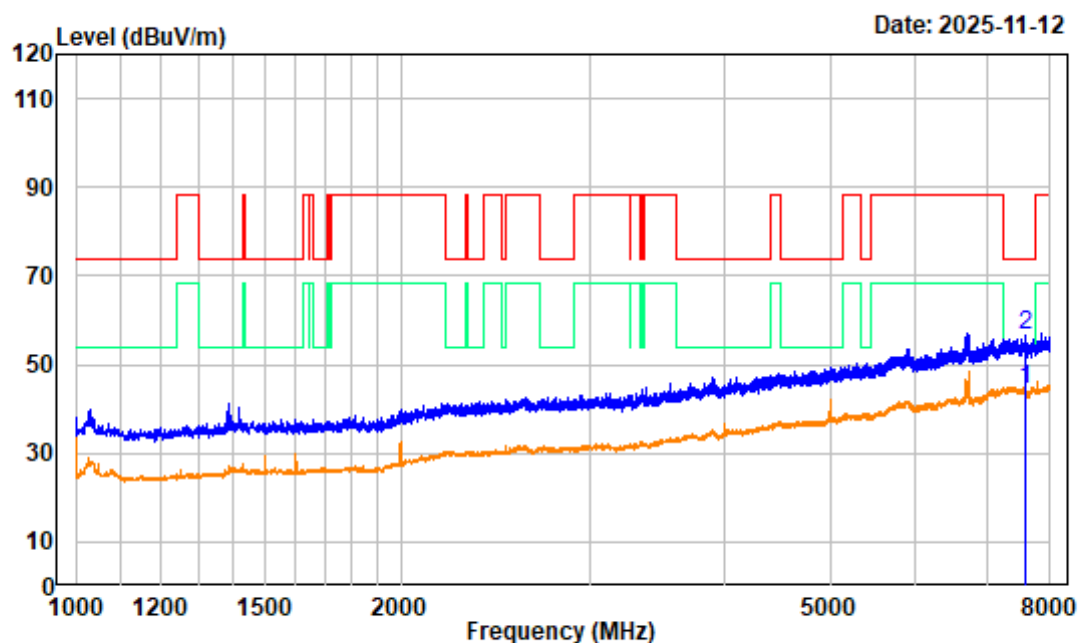

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Middle Channel 6705MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7594.875	-1.27	45.65	44.38	54.00	-9.62	average
2	7594.875	-1.27	57.83	56.56	74.00	-17.44	peak


802.11be80 Middle Channel 1GHz-8GHz_VERTICAL

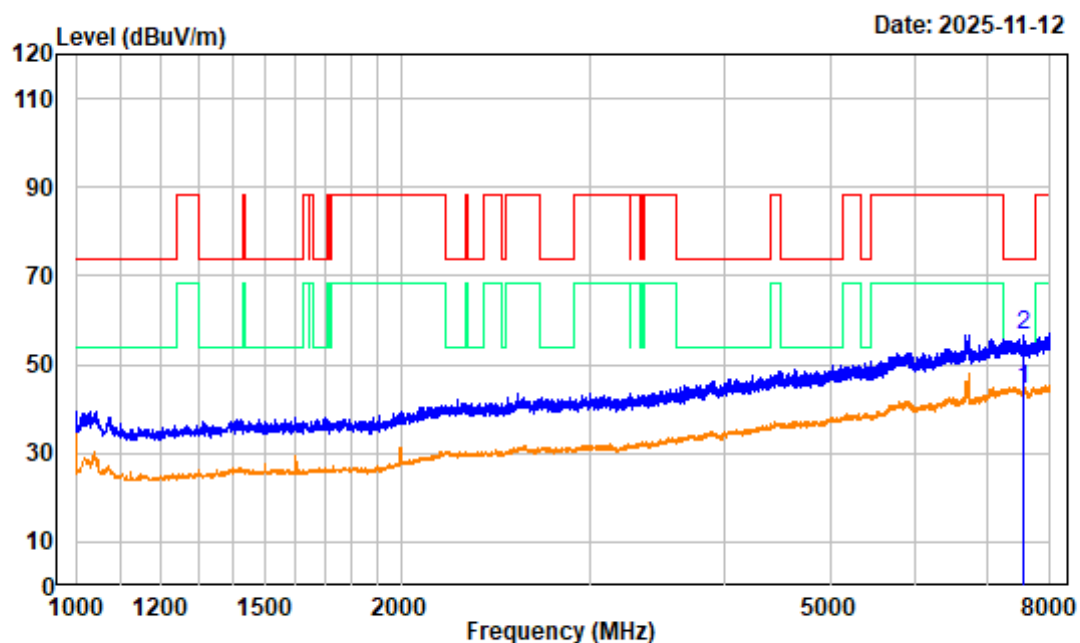

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Middle Channel 6705MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7560.750	-1.02	45.57	44.55	54.00	-9.45	average
2	7560.750	-1.02	57.43	56.41	74.00	-17.59	peak


802.11be80 Middle Channel 8GHz-18GHz_HORIZONTAL

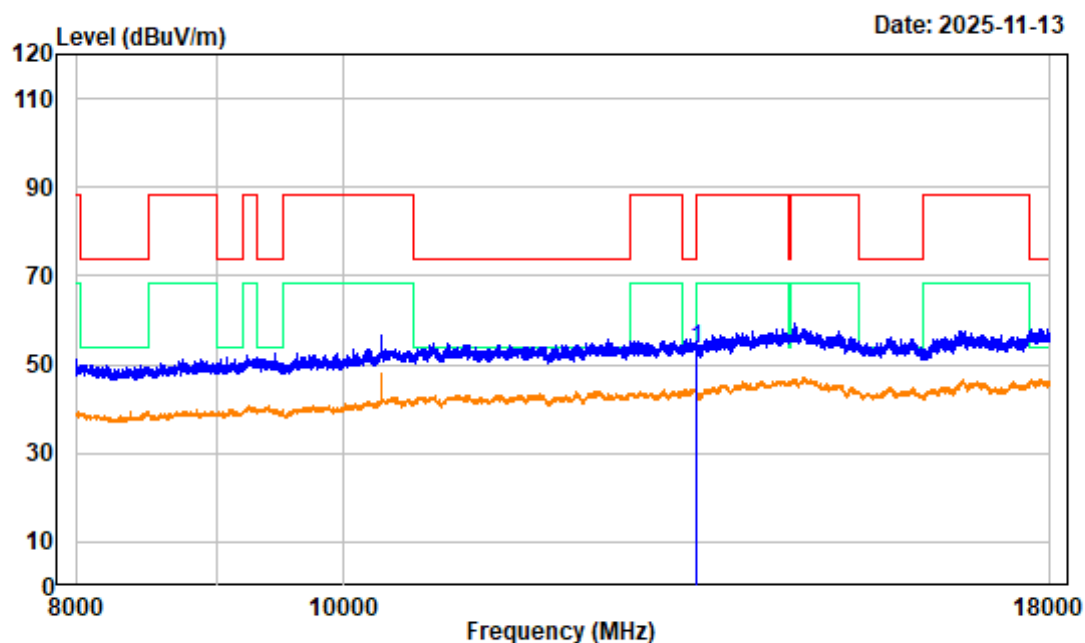

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Middle Channel 6705MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13410.000	6.91	46.64	53.55	88.20	-34.65	Peak


802.11be80 Middle Channel 8GHz-18GHz_VERTICAL

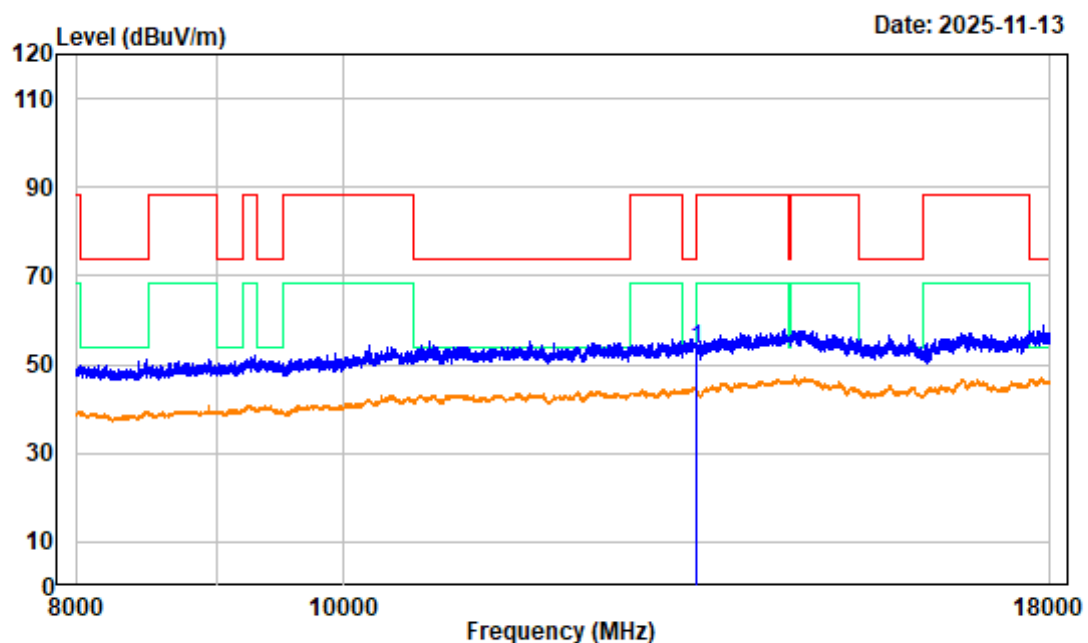

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Middle Channel 6705MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13410.000	6.91	46.73	53.64	88.20	-34.56	Peak


802.11be80 High Channel 1GHz-8GHz_HORIZONTAL

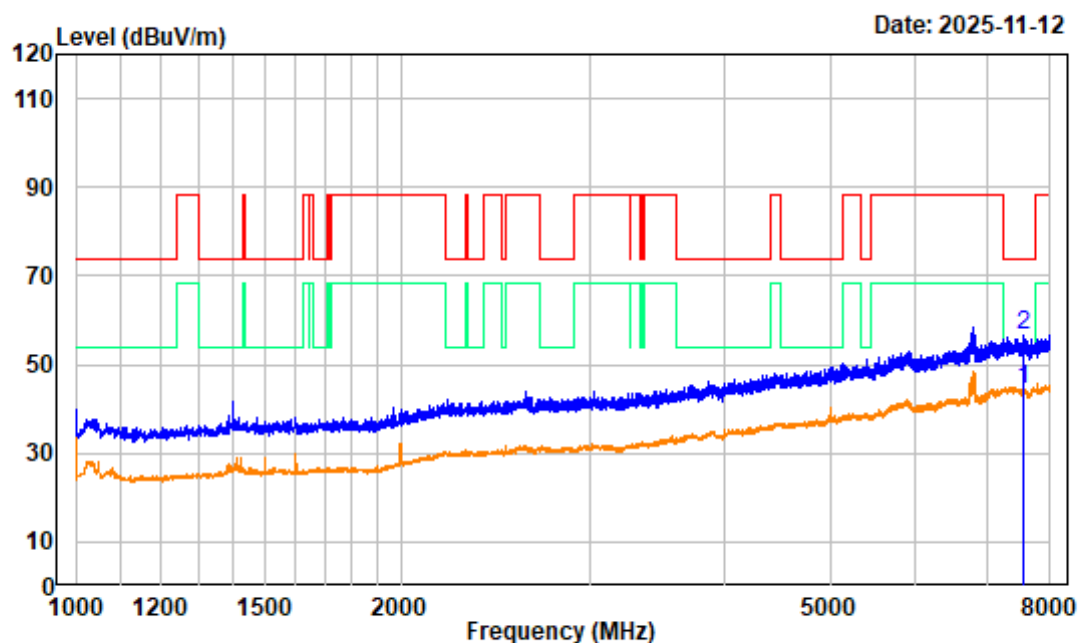

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 High Channel 6785MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7554.625	-0.98	45.46	44.48	54.00	-9.52	average
2	7554.625	-0.98	57.48	56.50	74.00	-17.50	peak


802.11be80 High Channel 1GHz-8GHz_VERTICAL

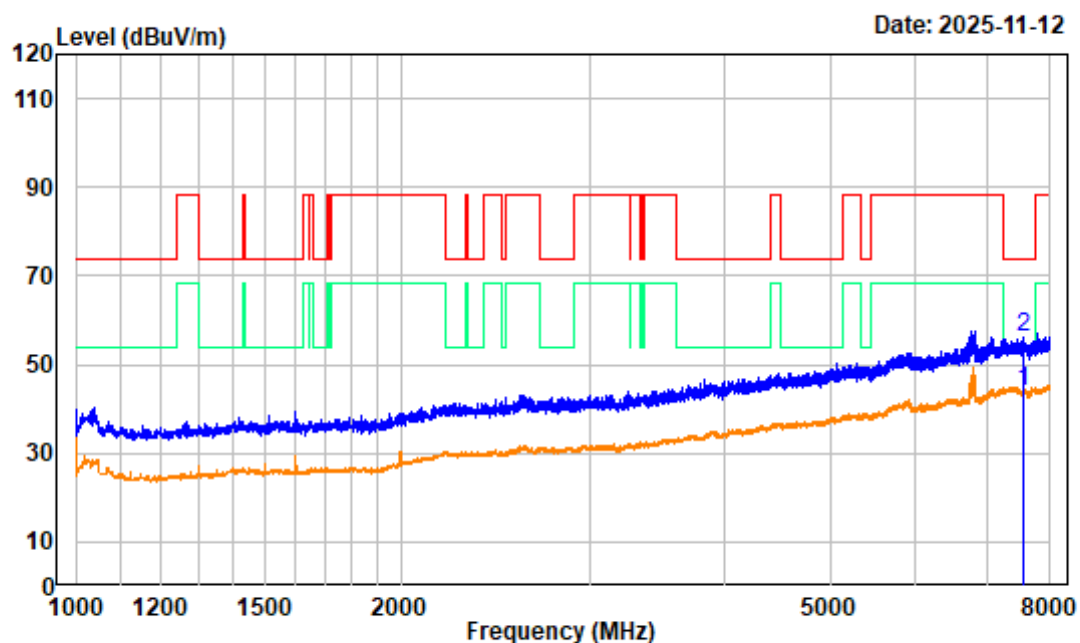

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 High Channel 6785MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7564.250	-1.05	45.12	44.07	54.00	-9.93	average
2	7564.250	-1.05	57.34	56.29	74.00	-17.71	peak


802.11be80 High Channel 8GHz-18GHz_HORIZONTAL

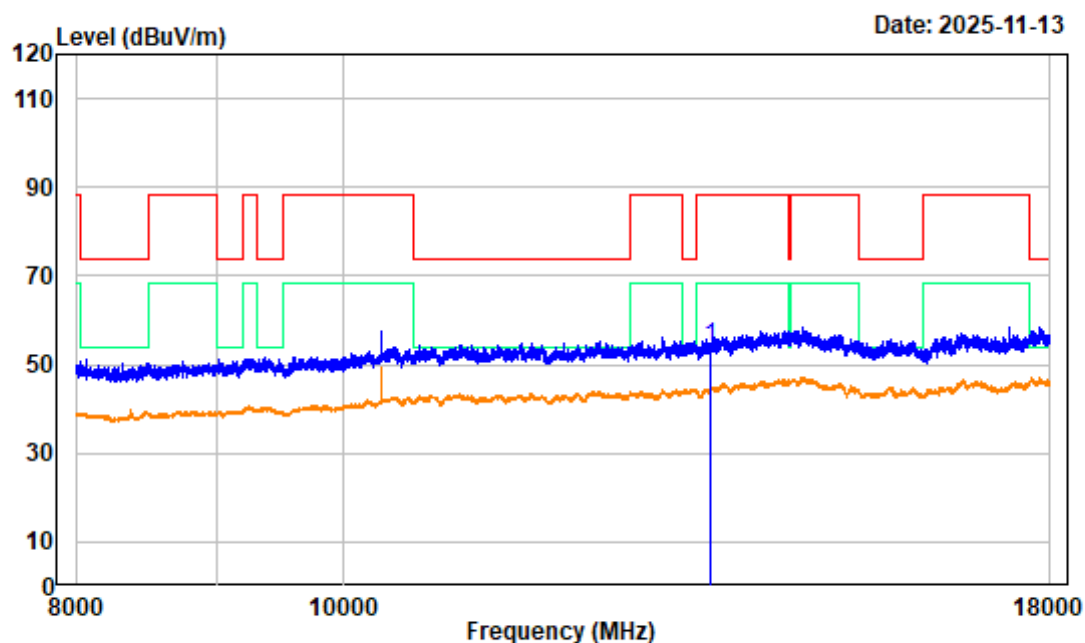

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 High Channel 6785MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13570.000	7.32	46.48	53.80	88.20	-34.40	Peak


802.11be80 High Channel 8GHz-18GHz_VERTICAL

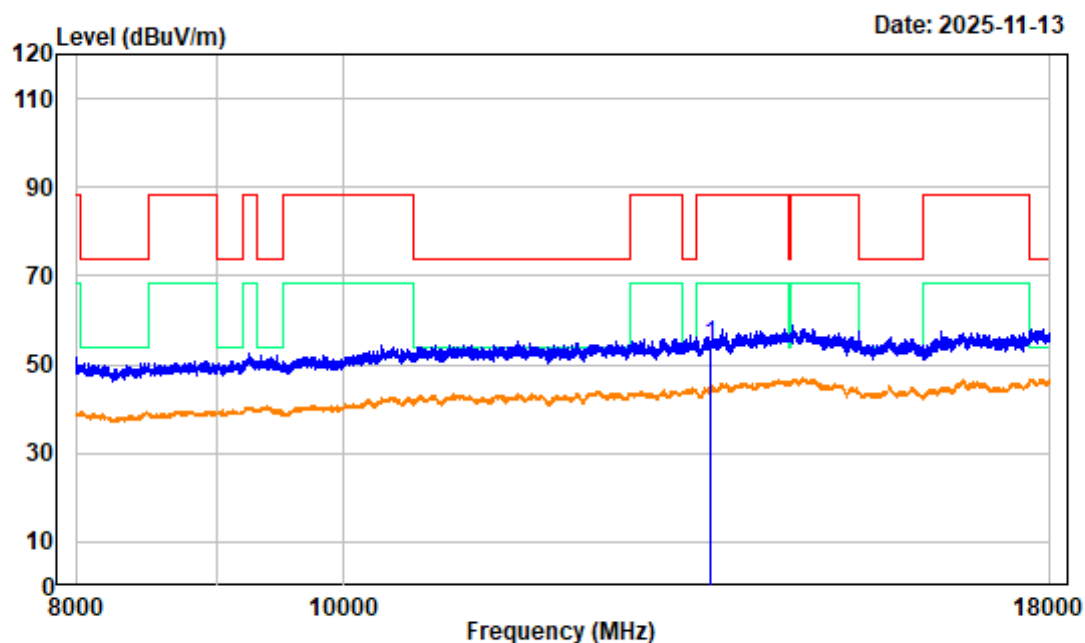

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 High Channel 6785MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13570.000	7.32	47.16	54.48	88.20	-33.72	Peak


802.11be160 Middle Channel 1GHz-8GHz_HORIZONTAL

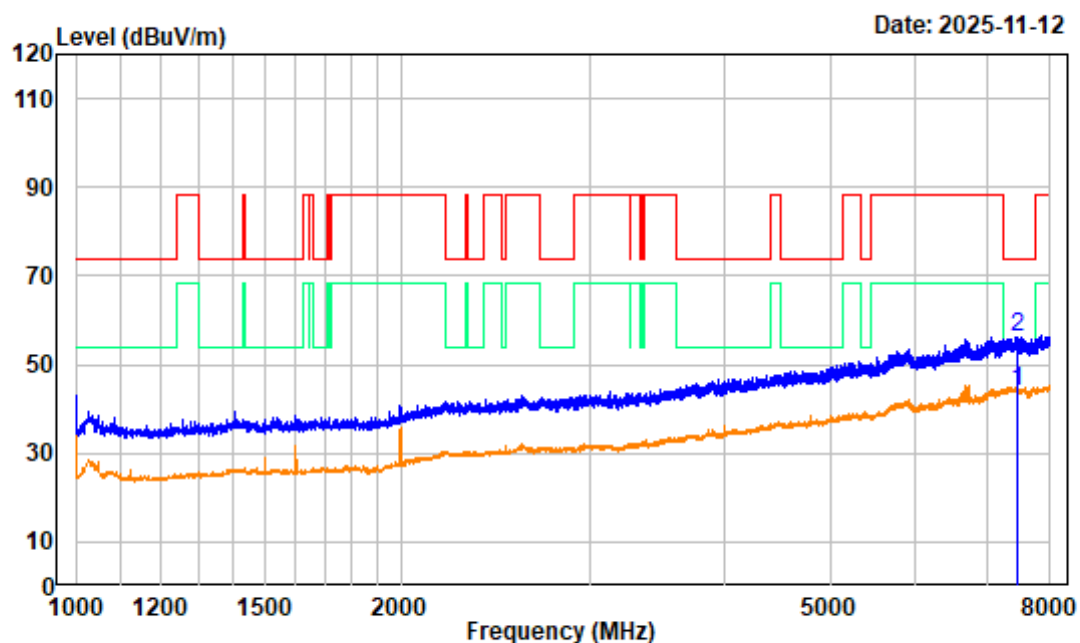

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Middle Channel 6665MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7468.875	-0.91	44.66	43.75	54.00	-10.25	average
2	7468.875	-0.91	57.18	56.27	74.00	-17.73	peak


802.11be160 Middle Channel 1GHz-8GHz_VERTICAL

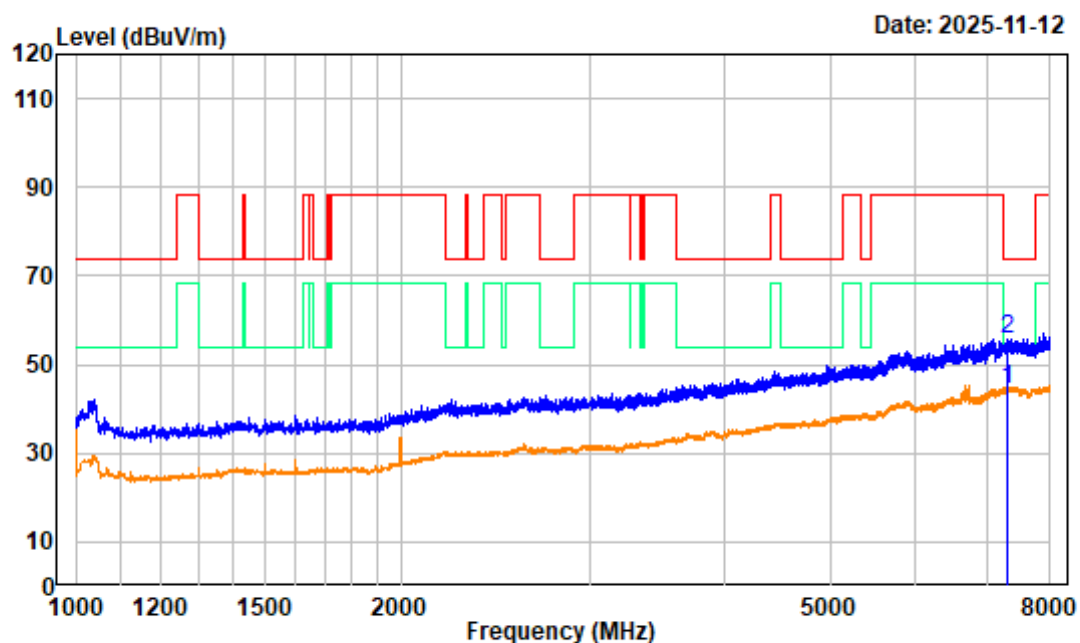

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Middle Channel 6665MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7302.625	-1.09	45.39	44.30	54.00	-9.70	average
2	7302.625	-1.09	56.93	55.84	74.00	-18.16	peak


802.11be160 Middle Channel 8GHz-18GHz_HORIZONTAL

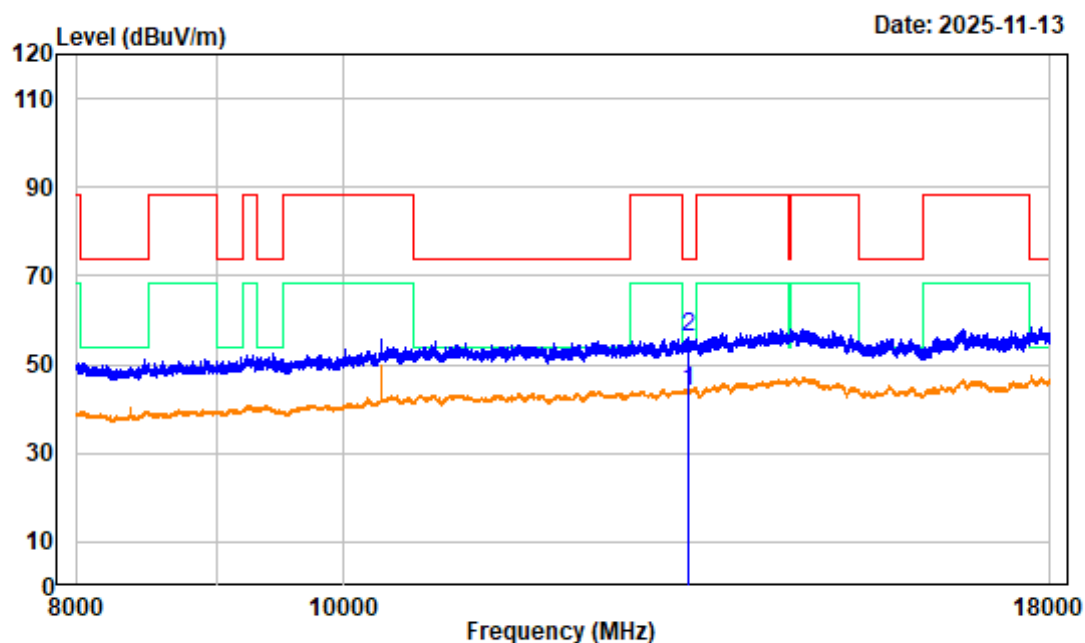

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Middle Channel 6665MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 13330.000	6.97	37.03	44.00	54.00	-10.00	Average
2 13330.000	6.97	48.98	55.95	74.00	-18.05	Peak

802.11be160 Middle Channel 8GHz-18GHz_VERTICAL

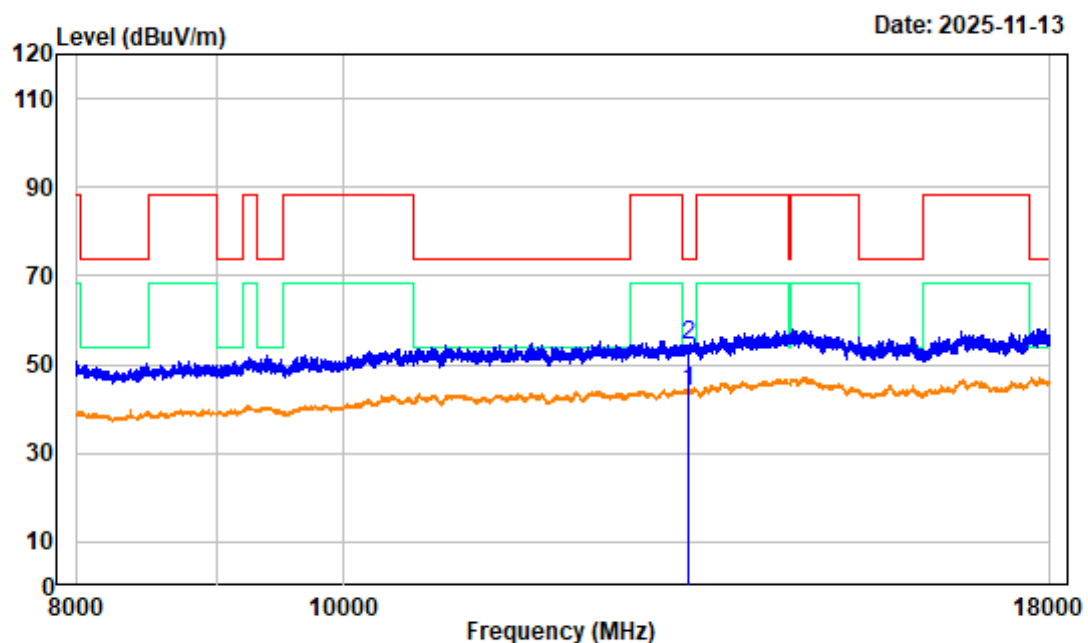


Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Middle Channel 6665MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13330.000	6.97	36.74	43.71	54.00	-10.29	Average
2	13330.000	6.97	47.58	54.55	74.00	-19.45	Peak

Crossed U-NII 7 and U-NII 8

802.11be20 Additional Channel 1GHz-8GHz_HORIZONTAL

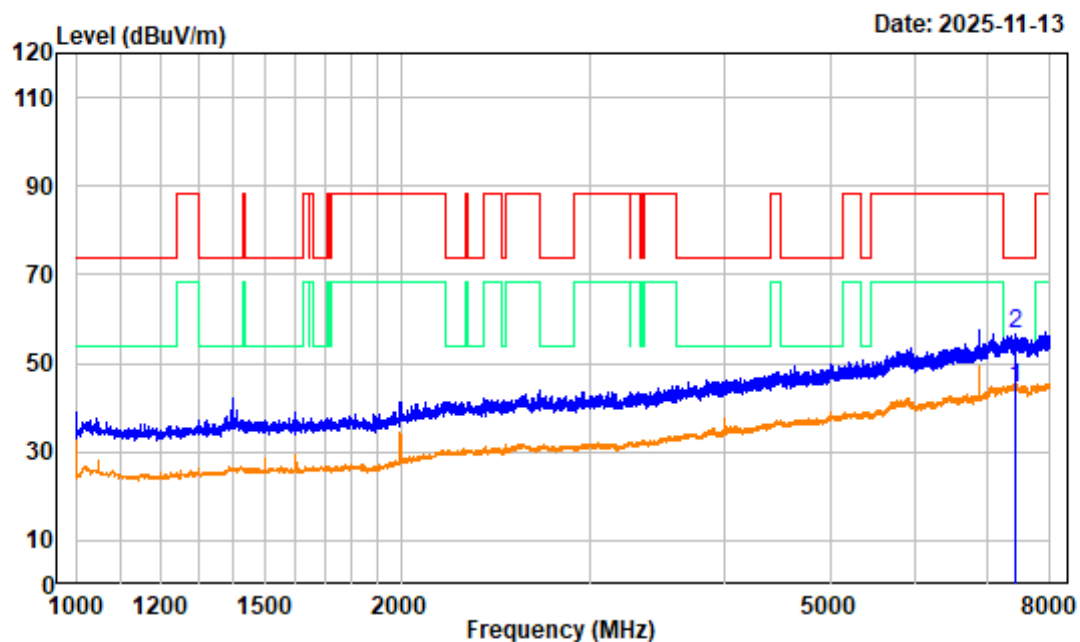

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504Z00193E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : 802.11be20 Additional Channel 6875MHz 1GHz-8GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7440.000	-0.97	45.20	44.23	54.00	-9.77	average
2	7440.000	-0.97	57.58	56.61	74.00	-17.39	peak


802.11be20 Additional Channel 1GHz-8GHz_VERTICAL

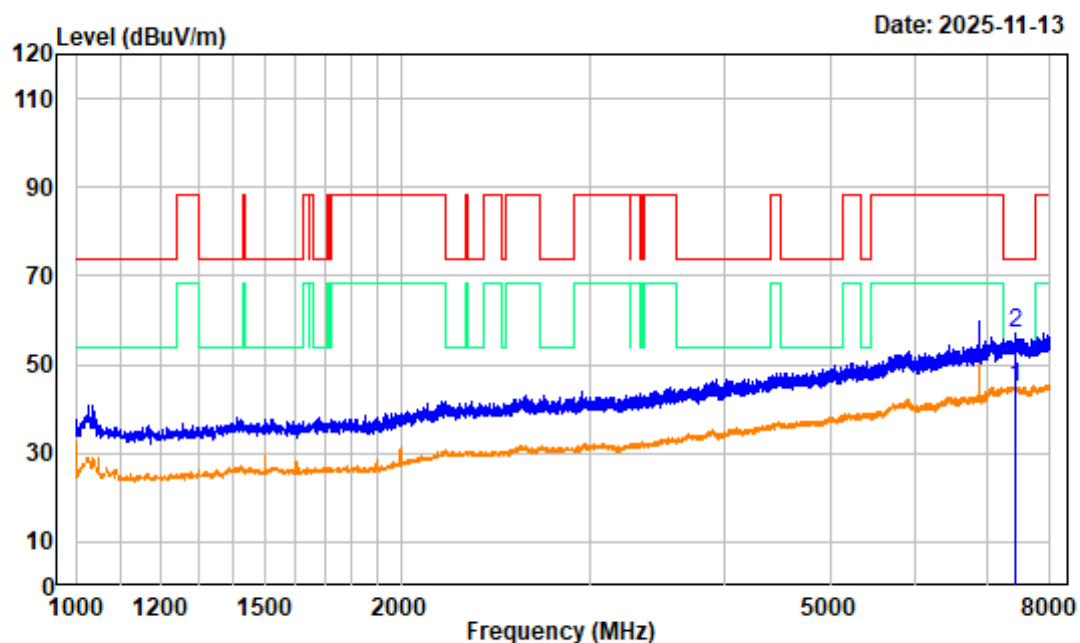

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Additional Channel 6875MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7440.000	-0.97	45.93	44.96	54.00	-9.04	average
2	7440.000	-0.97	57.89	56.92	74.00	-17.08	peak


802.11be20 Additional Channel 8GHz-18GHz_HORIZONTAL

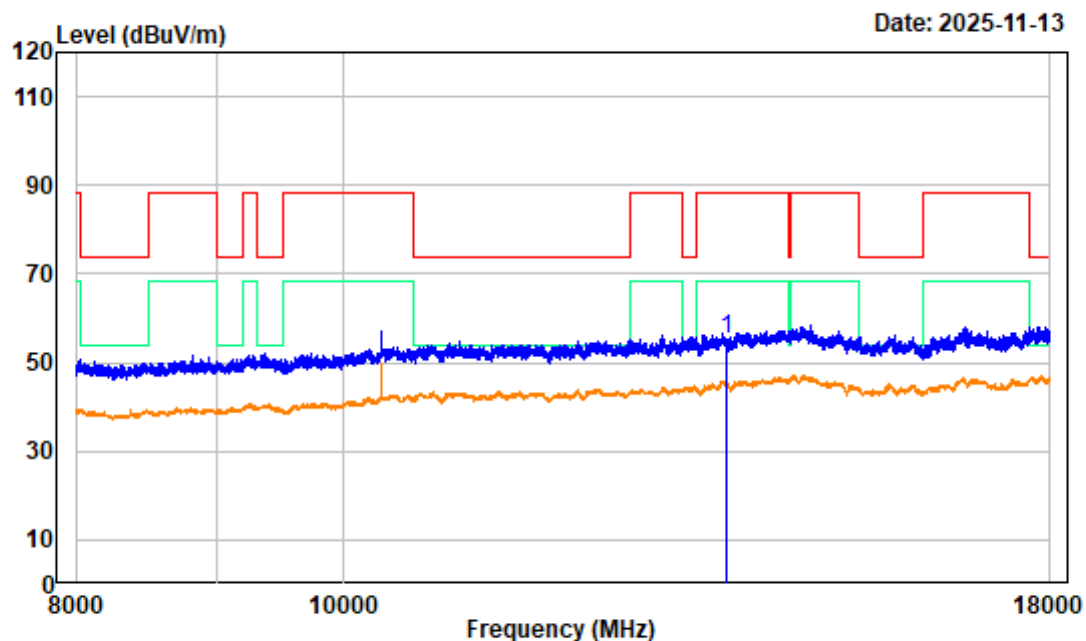

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Additional Channel 6875MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13750.000	7.76	47.58	55.34	88.20	-32.86	Peak


802.11be20 Additional Channel 8GHz-18GHz_VERTICAL

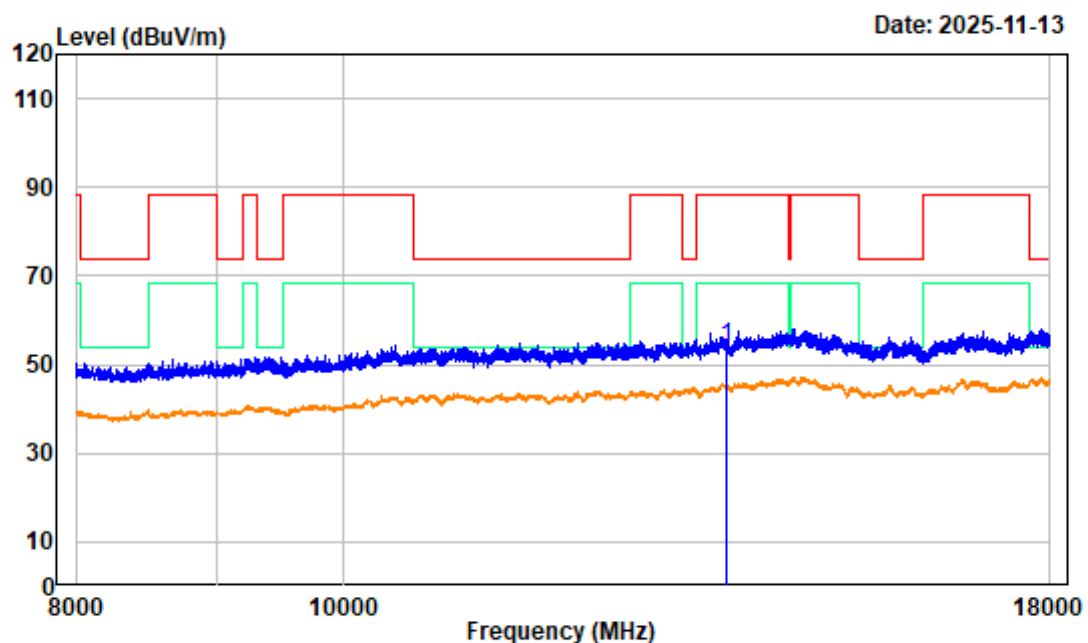

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Additional Channel 6875MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13750.000	7.76	46.03	53.79	88.20	-34.41	Peak


802.11be40 Additional Channel 1GHz-8GHz_HORIZONTAL

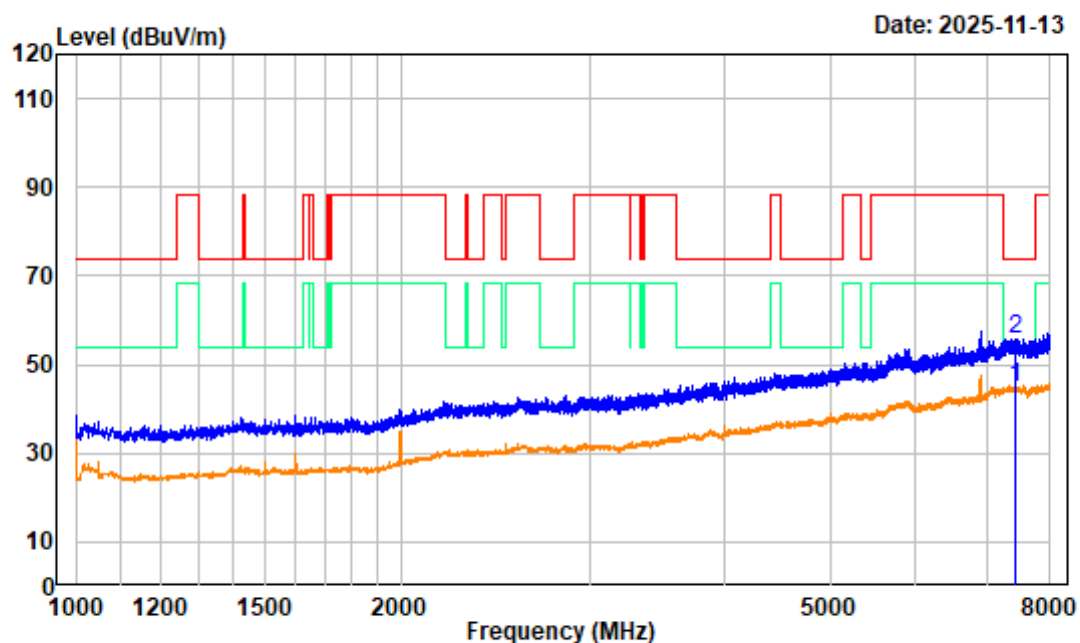

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Additional Channel 6885MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7434.750	-1.02	45.77	44.75	54.00	-9.25	average
2	7434.750	-1.02	56.91	55.89	74.00	-18.11	peak


802.11be40 Additional Channel 1GHz-8GHz_VERTICAL

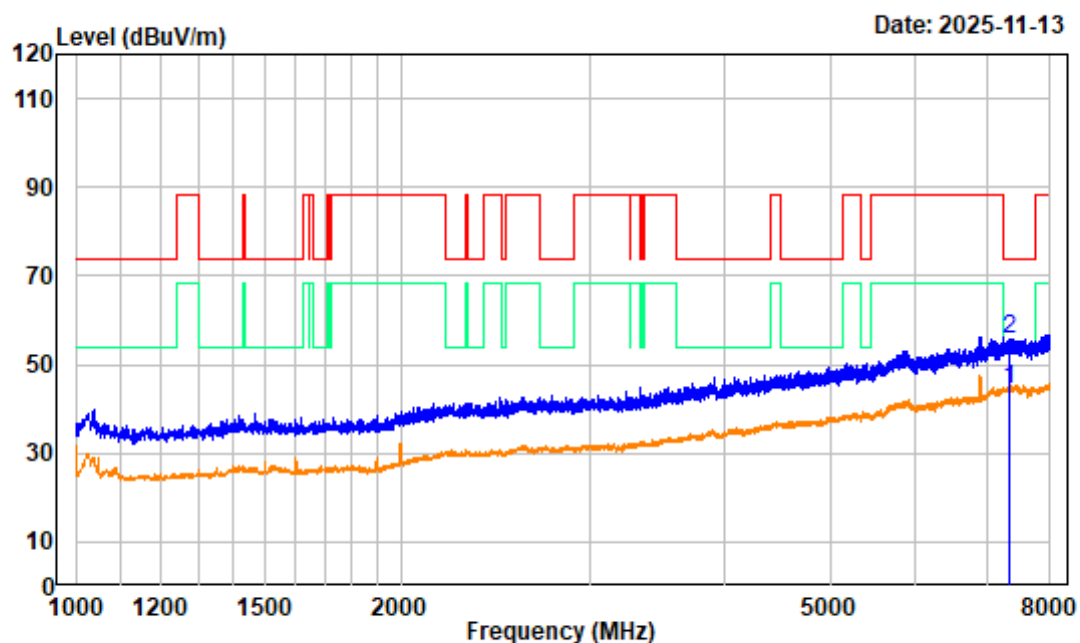

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Additional Channel 6885MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7321.875	-1.17	45.70	44.53	54.00	-9.47	average
2	7321.875	-1.17	56.85	55.68	74.00	-18.32	peak


802.11be40 Additional Channel 8GHz-18GHz_HORIZONTAL

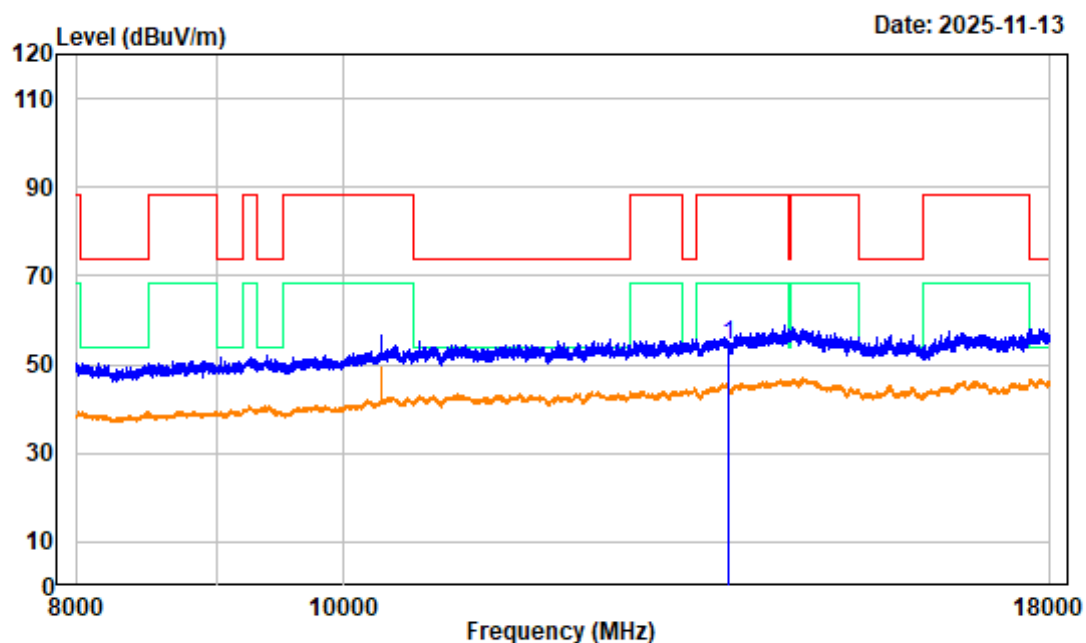

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Additional Channel 6885MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13770.000	7.36	46.83	54.19	88.20	-34.01	Peak


802.11be40 Additional Channel 8GHz-18GHz_VERTICAL

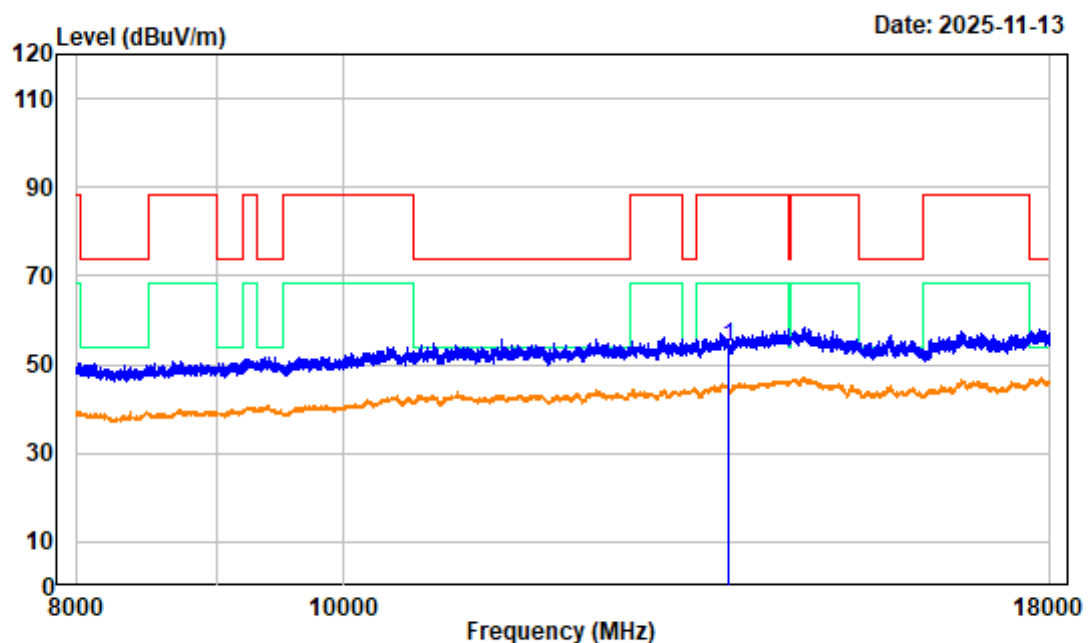

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Additional Channel 6885MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13770.000	7.36	46.46	53.82	88.20	-34.38	Peak


802.11be80 Additional Channel 1GHz-8GHz_HORIZONTAL

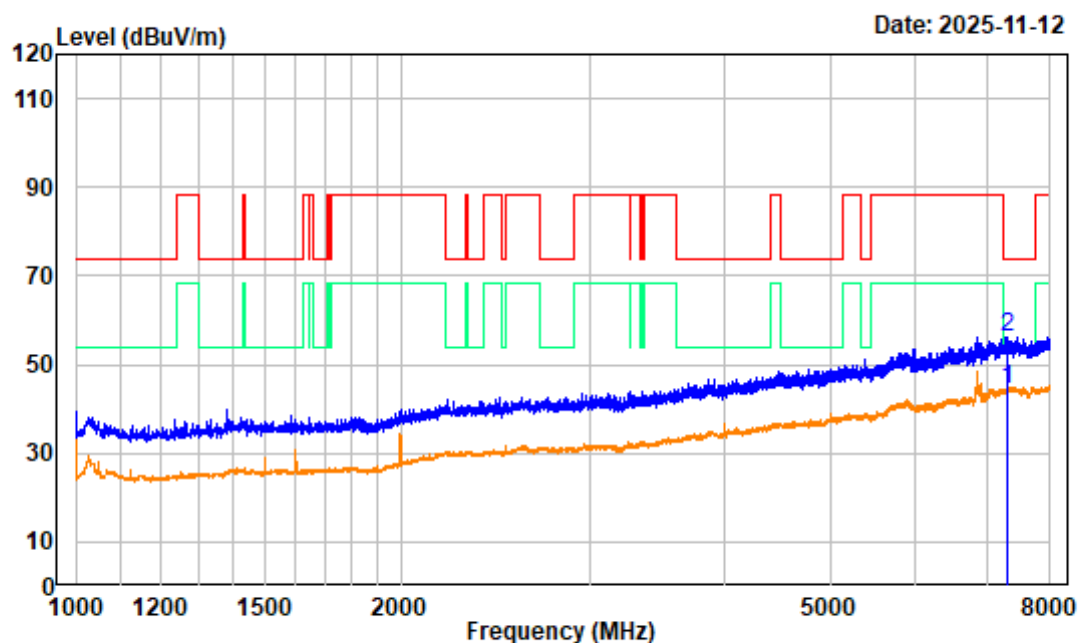

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Additional Channel 6865MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7301.750	-1.10	45.41	44.31	54.00	-9.69	average
2	7301.750	-1.10	57.45	56.35	74.00	-17.65	peak


802.11be80 Additional Channel 1GHz-8GHz_VERTICAL

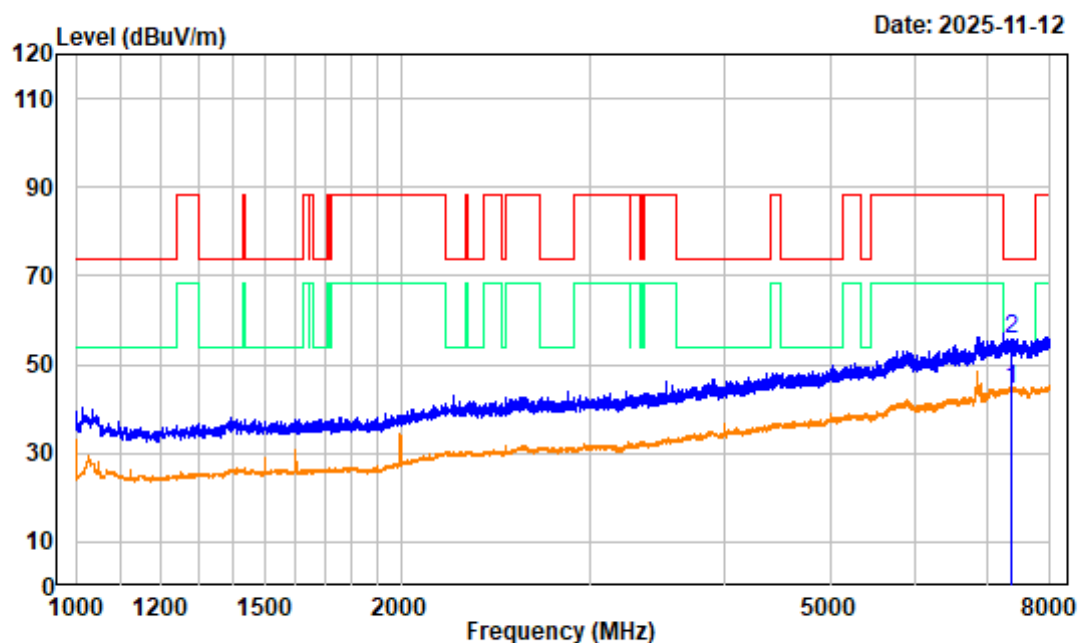

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Additional Channel 6865MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7359.500	-1.27	45.43	44.16	54.00	-9.84	average
2	7359.500	-1.27	56.90	55.63	74.00	-18.37	peak


802.11be80 Additional Channel 8GHz-18GHz_HORIZONTAL

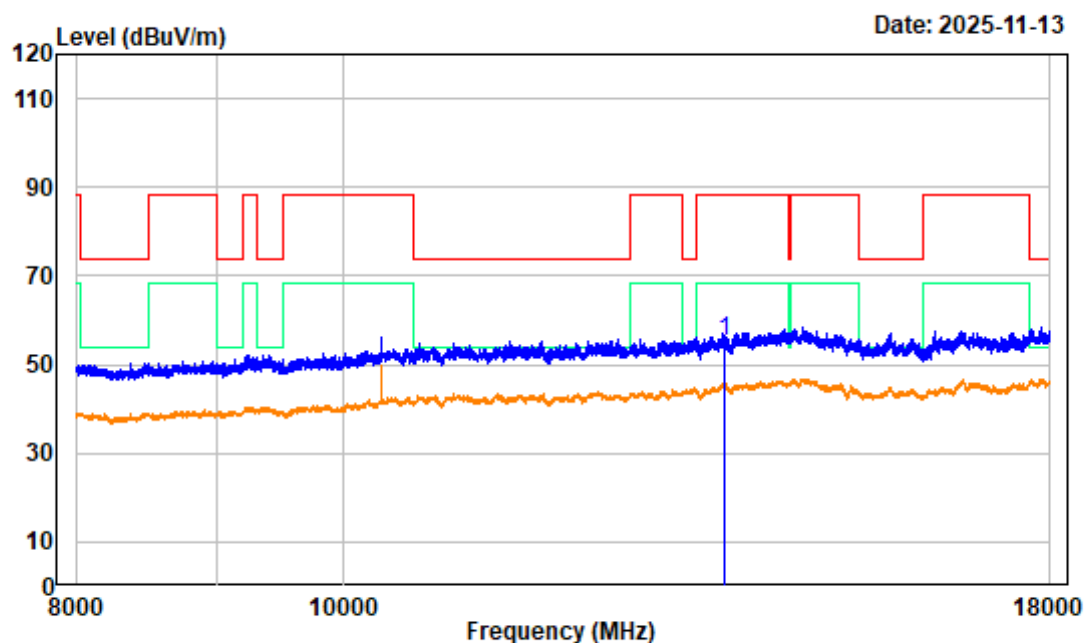

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Additional Channel 6865MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13730.000	7.91	47.40	55.31	88.20	-32.89	Peak


802.11be80 Additional Channel 8GHz-18GHz_VERTICAL

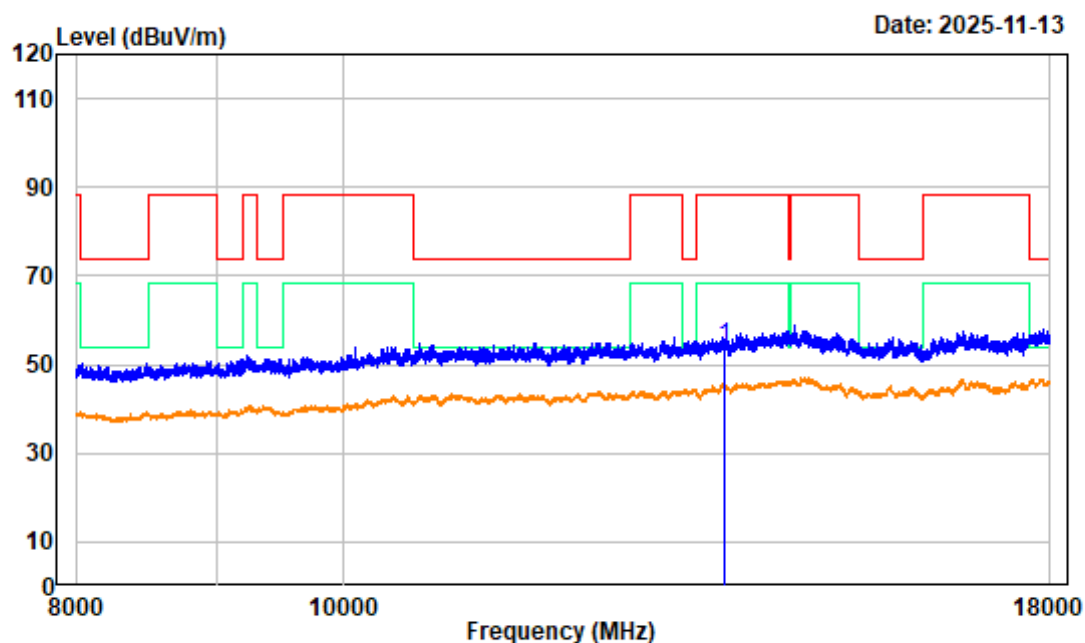

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Additional Channel 6865MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13730.000	7.91	45.87	53.78	88.20	-34.42	Peak


802.11be160 Additional Channel 1GHz-8GHz_HORIZONTAL

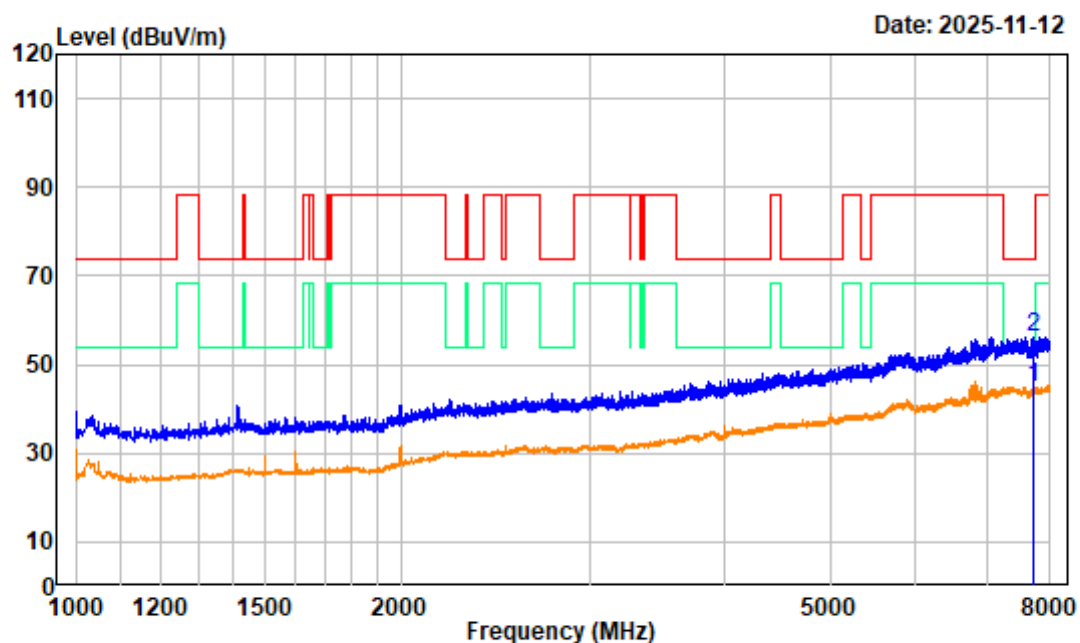

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Additional Channel 6825MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7720.875	-0.94	45.97	45.03	54.00	-8.97	average
2	7720.875	-0.94	56.95	56.01	74.00	-17.99	peak


802.11be160 Additional Channel 1GHz-8GHz_VERTICAL

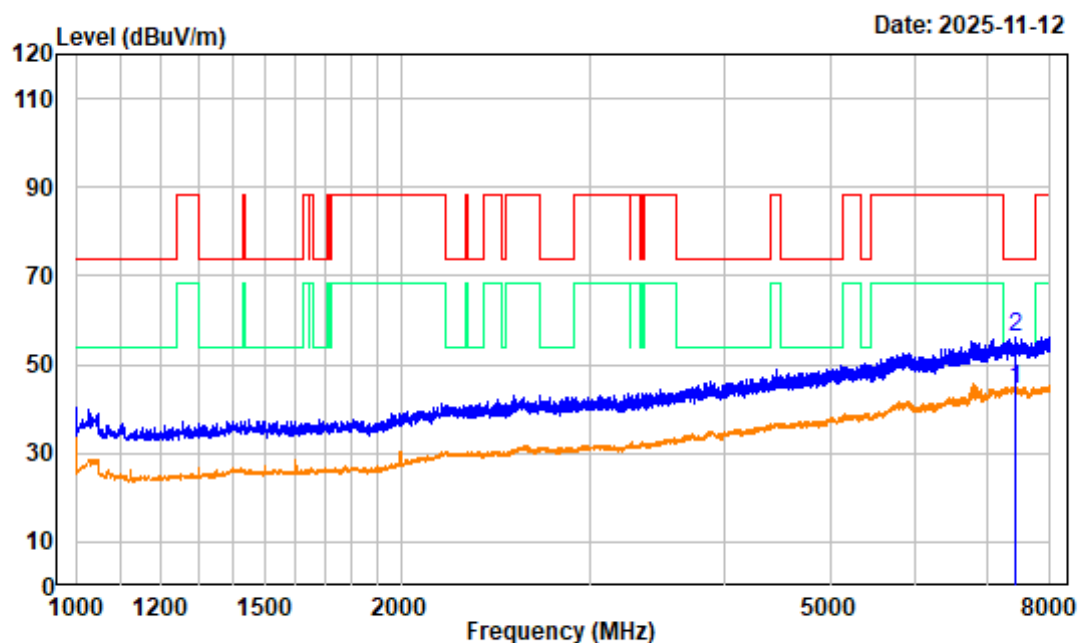

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Additional Channel 6825MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7442.625	-0.96	45.12	44.16	54.00	-9.84	average
2	7442.625	-0.96	56.90	55.94	74.00	-18.06	peak


802.11be160 Additional Channel 8GHz-18GHz_HORIZONTAL

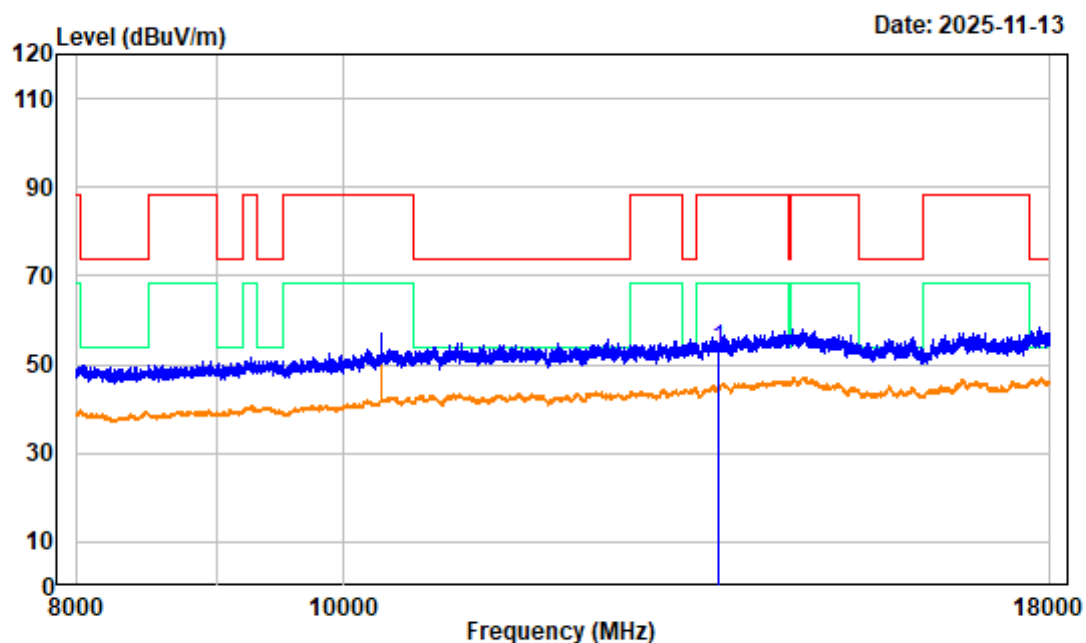

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Additional Channel 6825MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13650.000	7.28	46.28	53.56	88.20	-34.64	Peak


802.11be160 Additional Channel 8GHz-18GHz_VERTICAL

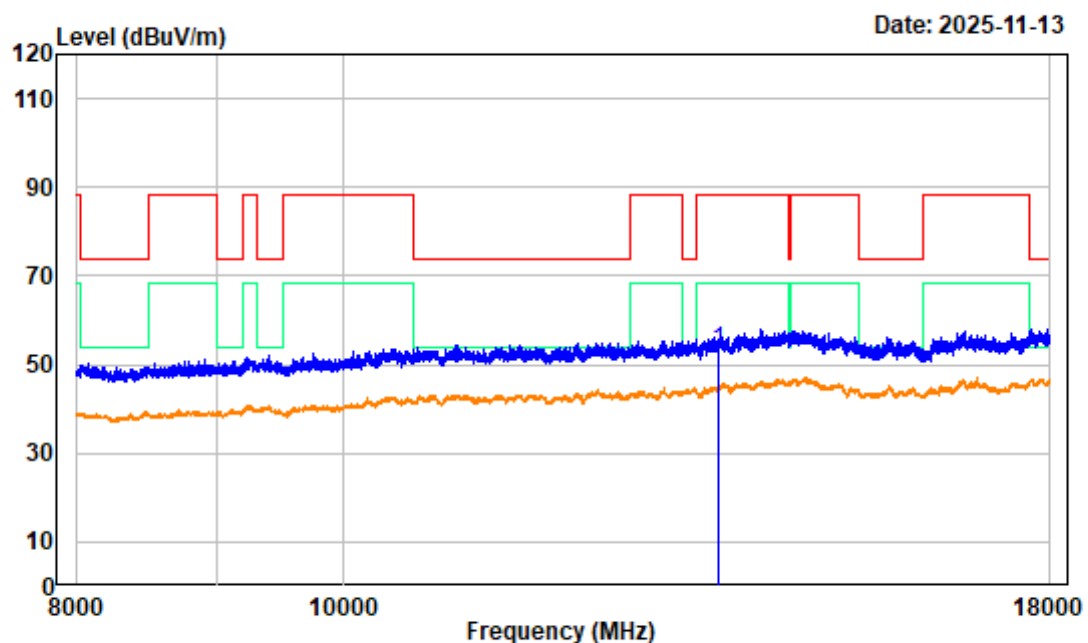

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Additional Channel 6825MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13650.000	7.28	45.70	52.98	88.20	-35.22	Peak


802.11be320 Additional Channel 1GHz-8GHz_HORIZONTAL

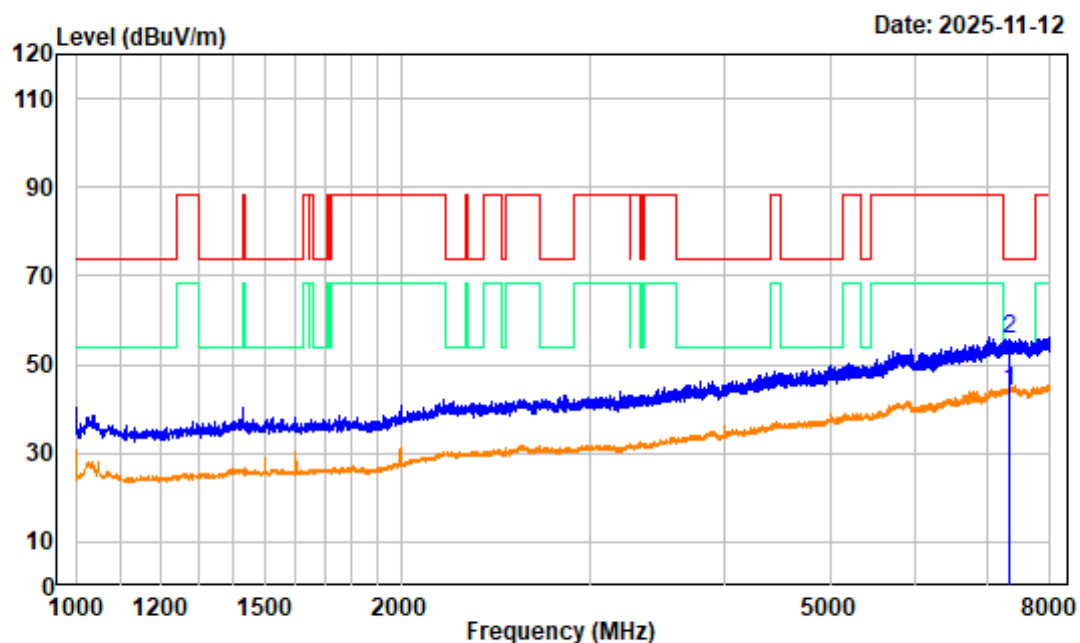

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 Additional Channel 6745MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7322.750	-1.16	45.26	44.10	54.00	-9.90	average
2	7322.750	-1.16	56.89	55.73	74.00	-18.27	peak


802.11be320 Additional Channel 1GHz-8GHz_VERTICAL

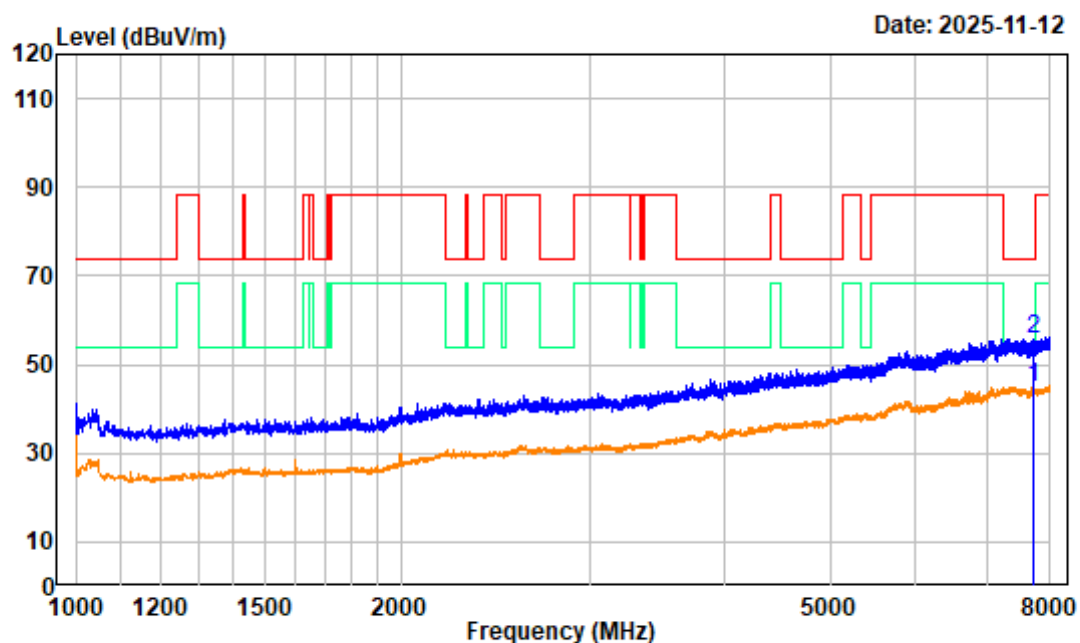

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 Additional Channel 6745MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7735.750	-1.11	45.76	44.65	54.00	-9.35	average
2	7735.750	-1.11	56.87	55.76	74.00	-18.24	peak


802.11be320 Additional Channel 8GHz-18GHz_HORIZONTAL

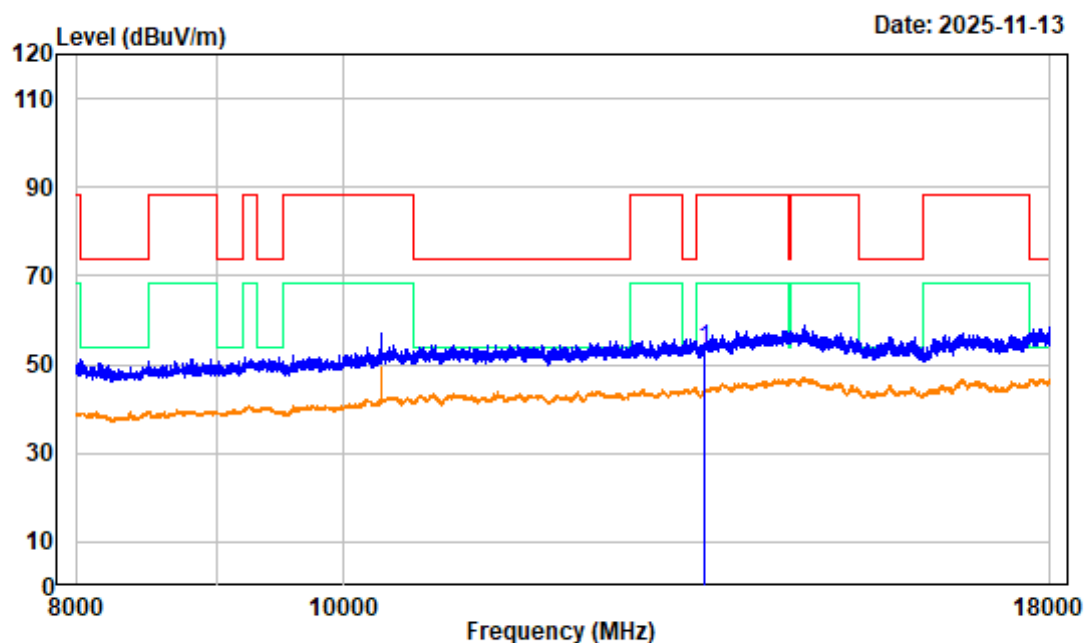

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 Additional Channel 6745MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13490.000	7.24	46.11	53.35	88.20	-34.85	Peak


802.11be320 Additional Channel 8GHz-18GHz_VERTICAL

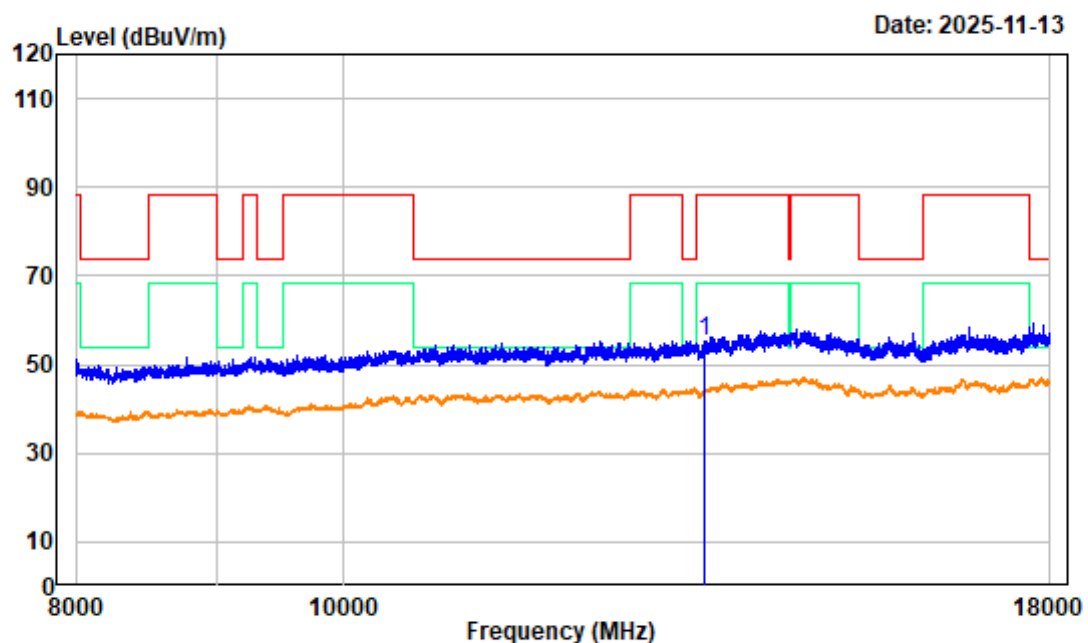

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 Additional Channel 6745MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13490.000	7.24	47.82	55.06	88.20	-33.14	Peak

802.11be320 Additional Channel 1GHz-8GHz_HORIZONTAL

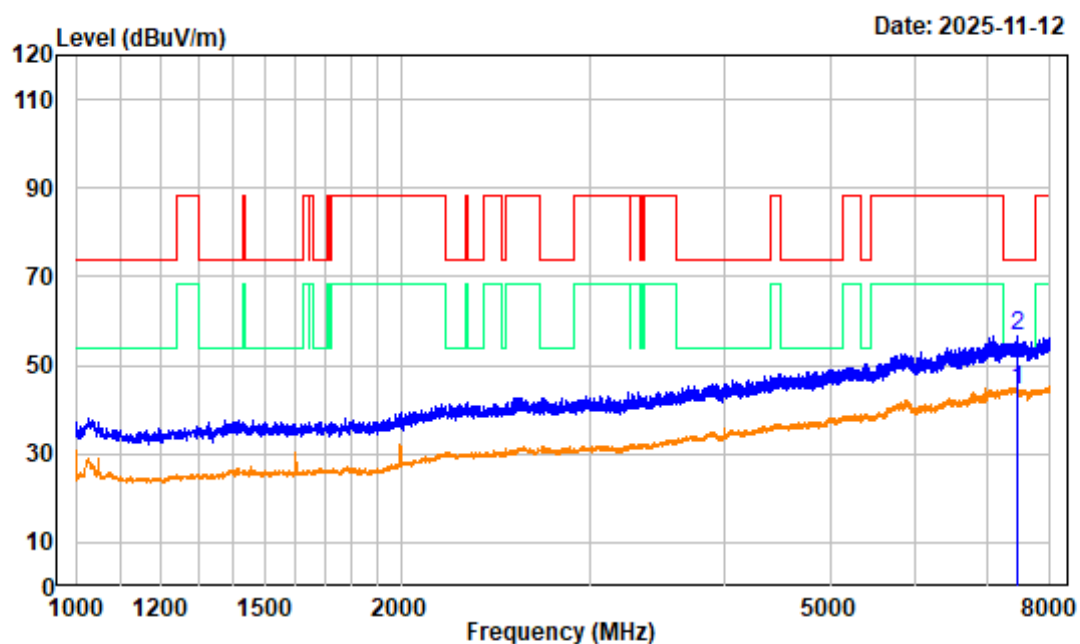

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504Z00193E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : 802.11be320 Additional Channel 6905MHz 1GHz-8GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7454.000	-0.90	45.30	44.40	54.00	-9.60	average
2	7454.000	-0.90	57.37	56.47	74.00	-17.53	peak


802.11be320 Additional Channel 1GHz-8GHz_VERTICAL

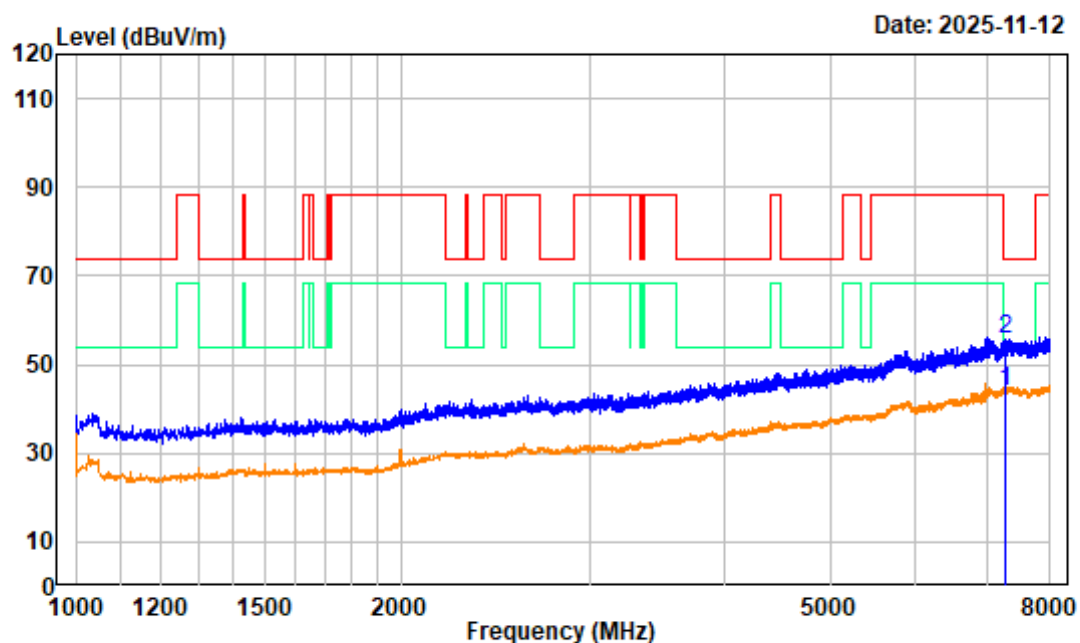

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 Additional Channel 6905MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7270.250	-1.22	45.25	44.03	54.00	-9.97	average
2	7270.250	-1.22	56.77	55.55	74.00	-18.45	peak


802.11be320 Additional Channel 8GHz-18GHz_HORIZONTAL

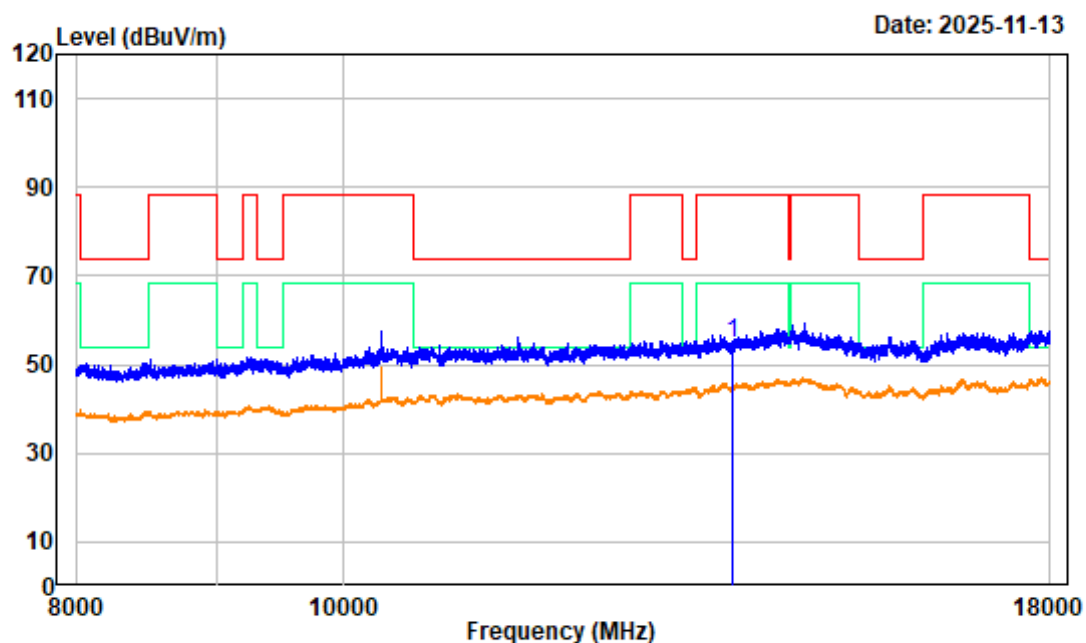

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 Additional Channel 6905MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13810.000	7.05	47.79	54.84	88.20	-33.36	Peak

802.11be320 Additional Channel 8GHz-18GHz_VERTICAL

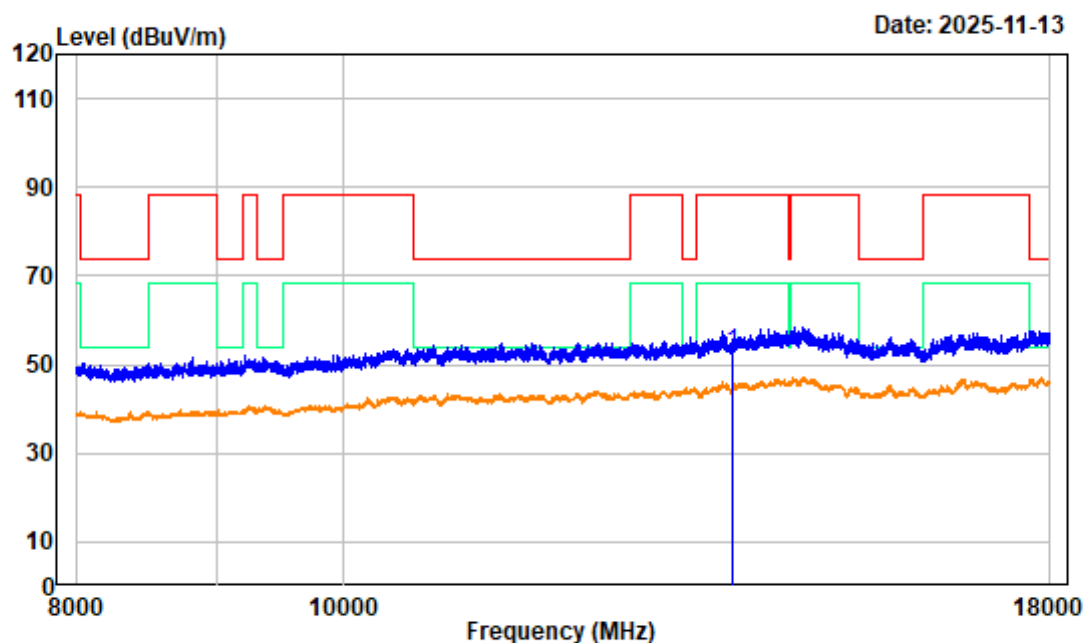


Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 Additional Channel 6905MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13810.000	7.05	45.42	52.47	88.20	-35.73	Peak

U-NII 8 Band (6875-7125 MHz)


802.11be20 Low Channel 1GHz-8GHz_HORIZONTAL

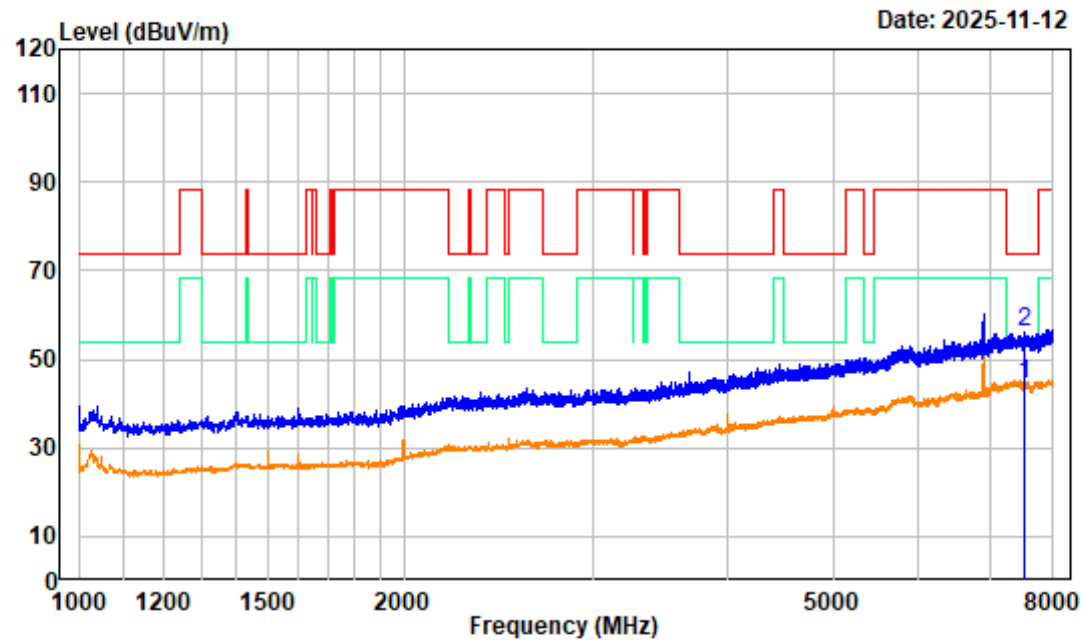

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504Z00193E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11be20 Low Channel 6895MHz 1GHz-8GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7531.875	-0.93	45.38	44.45	54.00	-9.55	average
2	7531.875	-0.93	57.15	56.22	74.00	-17.78	peak


802.11be20 Low Channel 1GHz-8GHz_VERTICAL

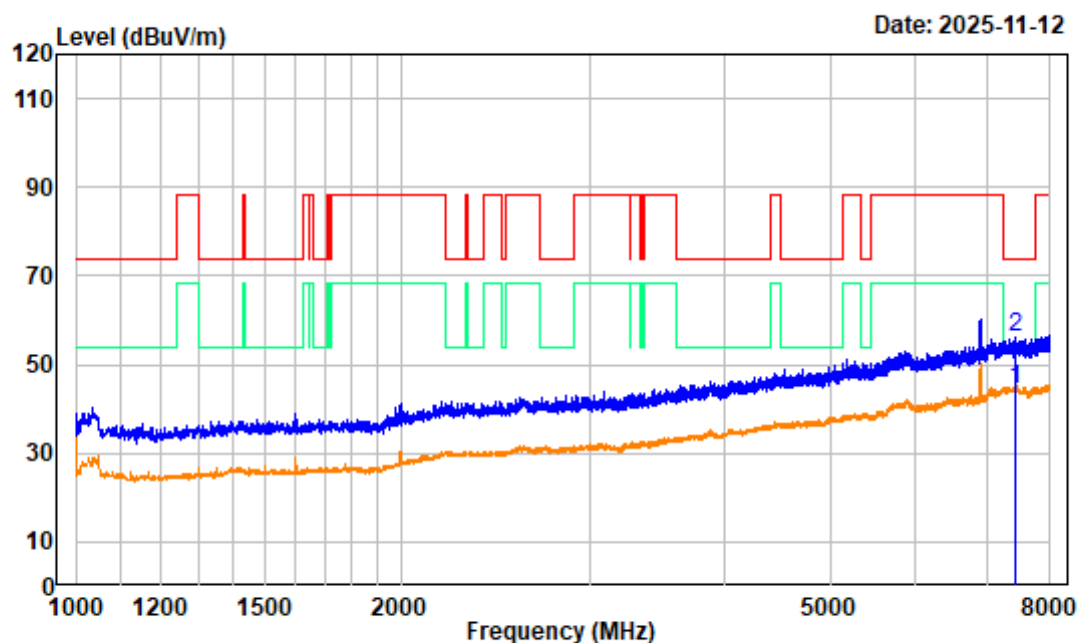

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Low Channel 6895MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7433.875	-1.03	45.51	44.48	54.00	-9.52	average
2	7433.875	-1.03	57.07	56.04	74.00	-17.96	peak


802.11be20 Low Channel 8GHz-18GHz_HORIZONTAL

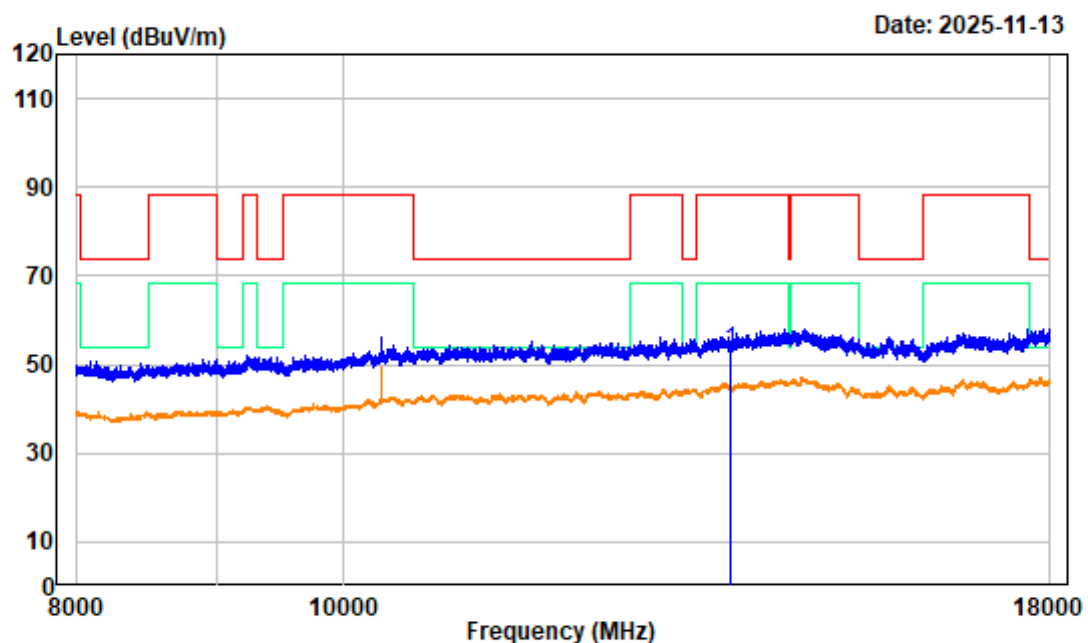

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Low Channel 6895MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13790.000	6.98	45.87	52.85	88.20	-35.35	Peak


802.11be20 Low Channel 8GHz-18GHz_VERTICAL

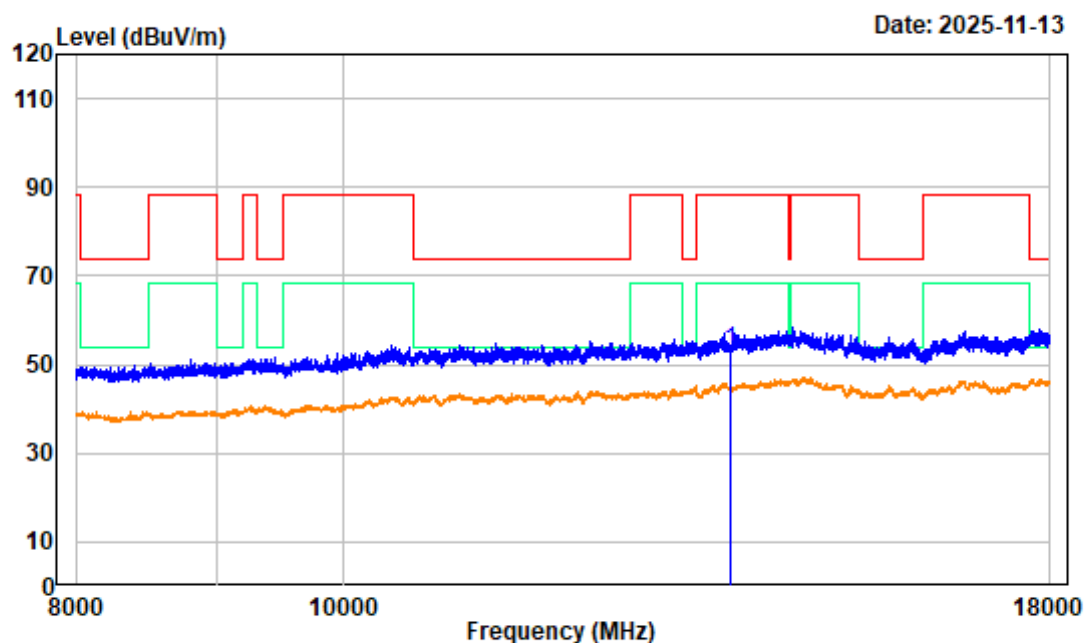

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Low Channel 6895MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13790.000	6.98	46.14	53.12	88.20	-35.08	Peak


802.11be20 Middle Channel 1GHz-8GHz_HORIZONTAL

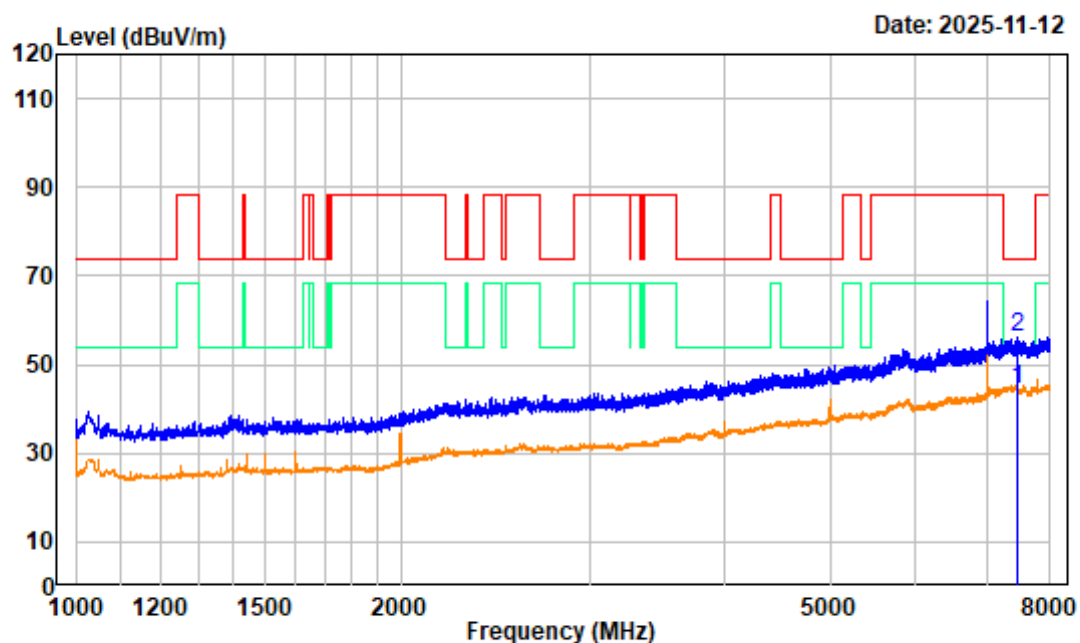

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Middle Channel 6995MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7459.250	-0.90	45.35	44.45	54.00	-9.55	average
2	7459.250	-0.90	57.07	56.17	74.00	-17.83	peak

802.11be20 Middle Channel 1GHz-8GHz_VERTICAL

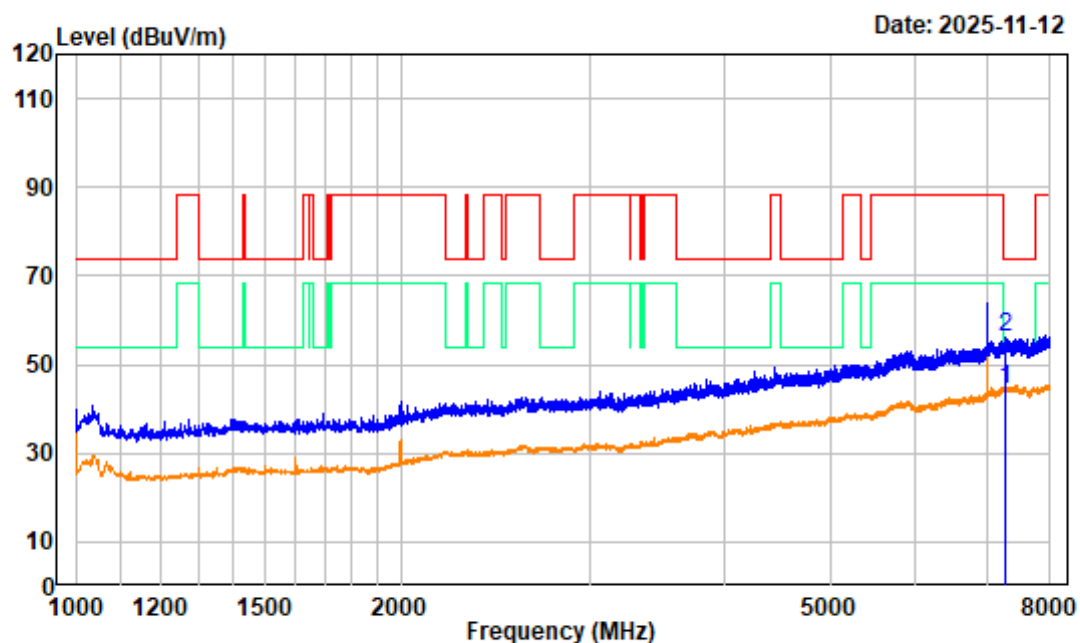

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504Z00193E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : 802.11be20 Middle Channel 6995MHz 1GHz-8GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7266.750	-1.24	45.62	44.38	54.00	-9.62	average
2	7266.750	-1.24	57.17	55.93	74.00	-18.07	peak


802.11be20 Middle Channel 8GHz-18GHz_HORIZONTAL

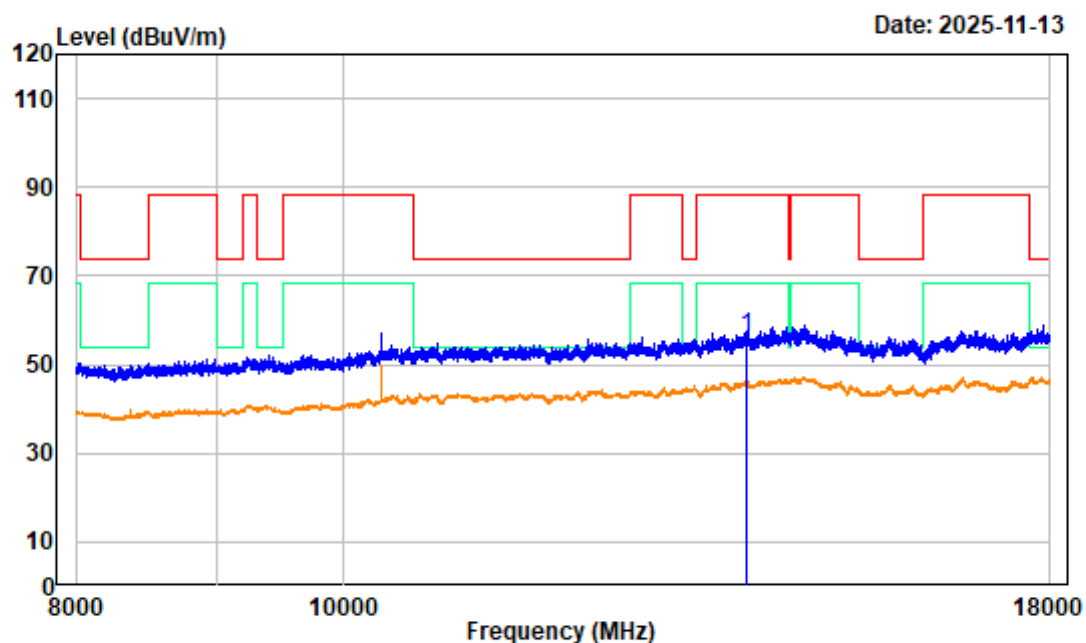

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Middle Channel 6995MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13990.000	8.03	48.20	56.23	88.20	-31.97	Peak


802.11be20 Middle Channel 8GHz-18GHz_VERTICAL

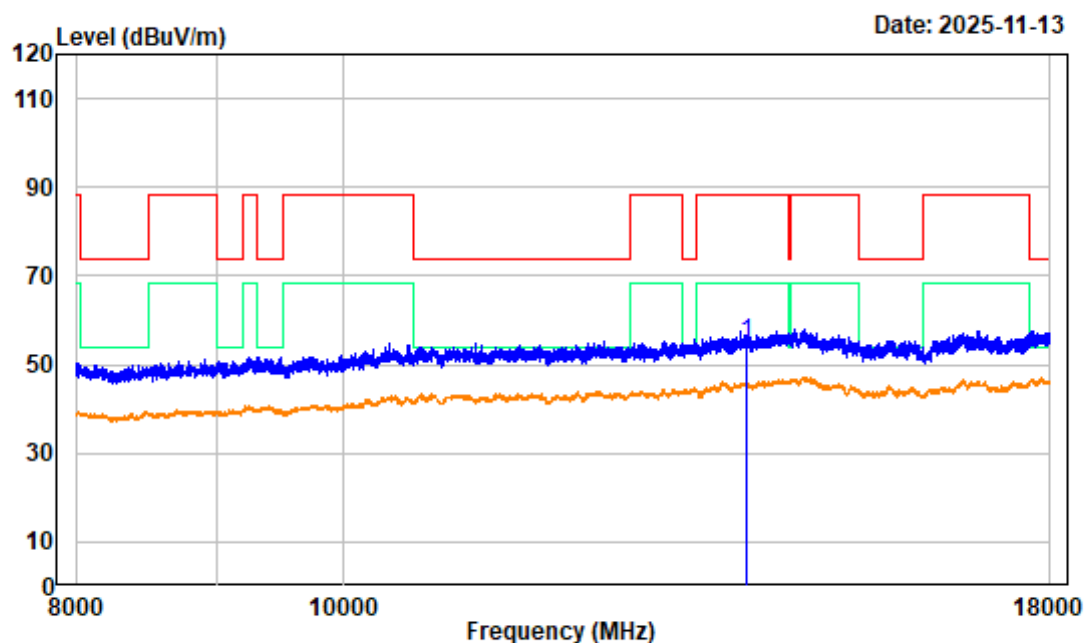

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Middle Channel 6995MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13990.000	8.03	46.79	54.82	88.20	-33.38	Peak


802.11be20 High Channel 1GHz-8GHz_HORIZONTAL

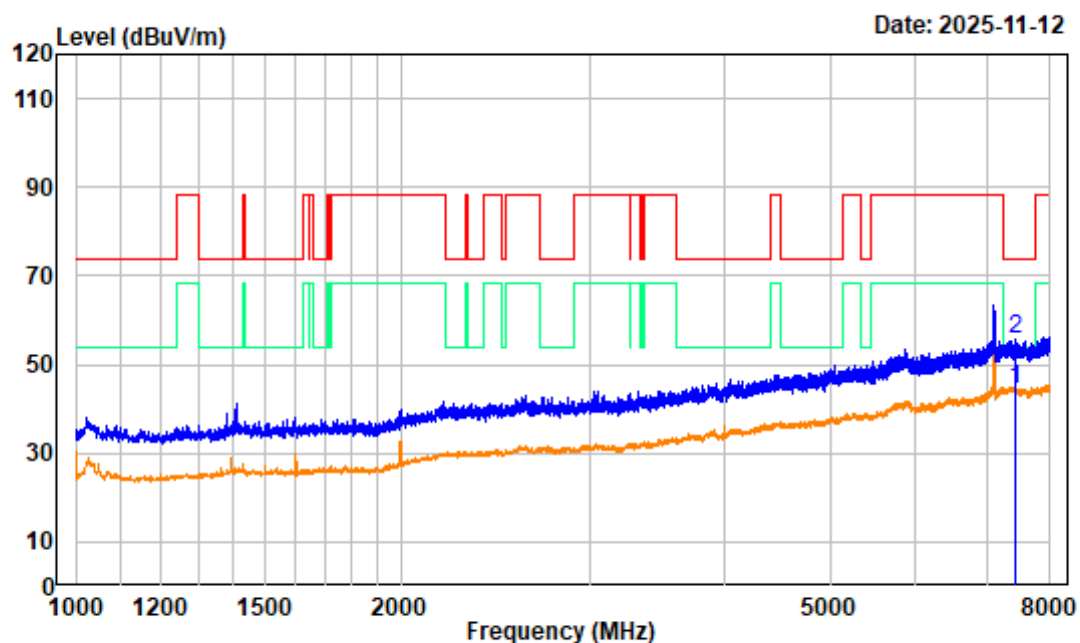

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 High Channel 7095MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7435.625	-1.01	45.37	44.36	54.00	-9.64	average
2	7435.625	-1.01	56.48	55.47	74.00	-18.53	peak


802.11be20 High Channel 1GHz-8GHz_VERTICAL

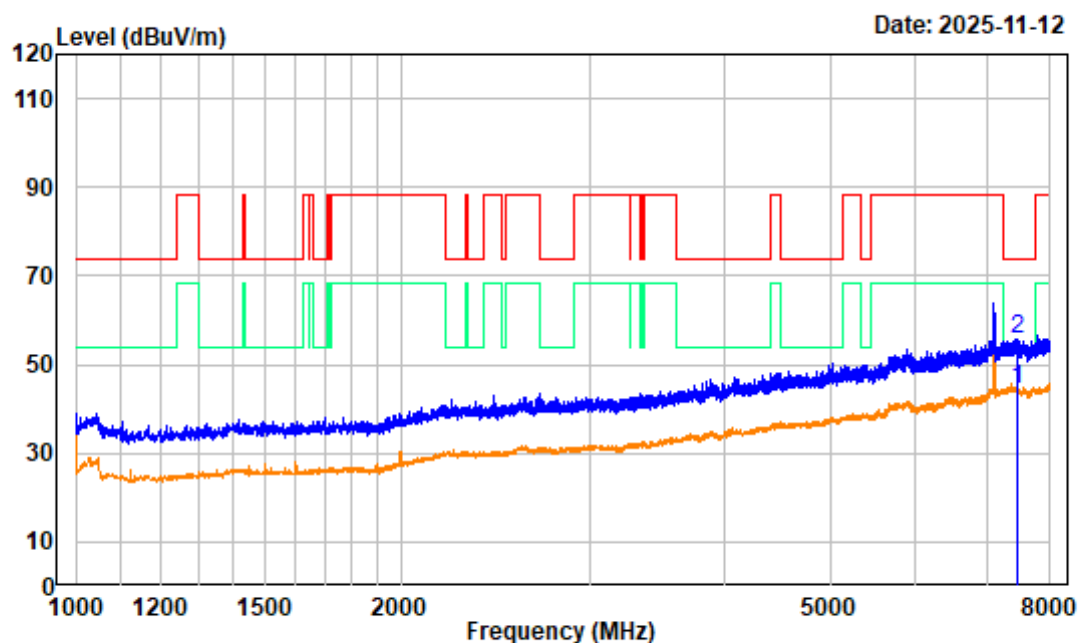

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 High Channel 7095MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7464.500	-0.90	45.22	44.32	54.00	-9.68	average
2	7464.500	-0.90	56.49	55.59	74.00	-18.41	peak


802.11be20 High Channel 8GHz-18GHz_HORIZONTAL

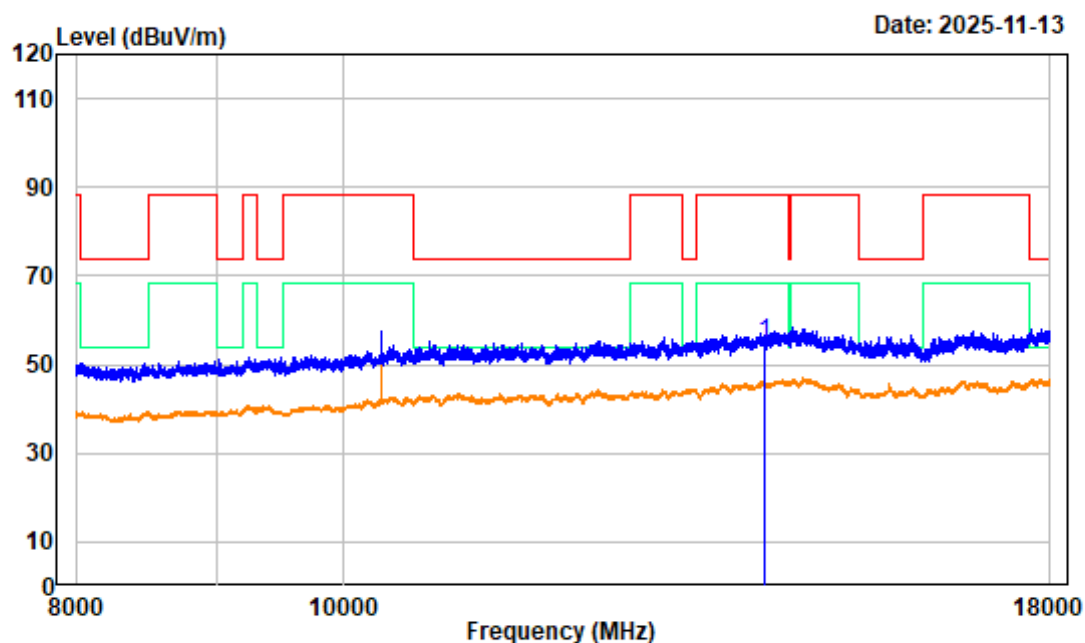

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 High Channel 7095MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	14190.000	8.20	46.54	54.74	88.20	-33.46	Peak


802.11be20 High Channel 8GHz-18GHz_VERTICAL

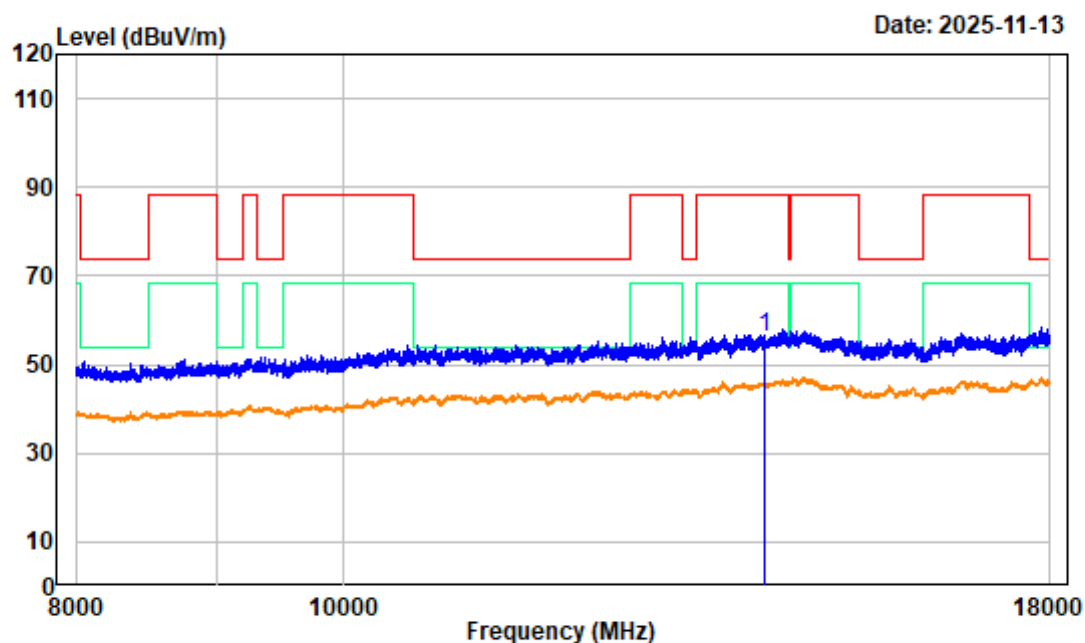

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 High Channel 7095MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	14190.000	8.20	47.76	55.96	88.20	-32.24	Peak


802.11be40 Low Channel 1GHz-8GHz_HORIZONTAL

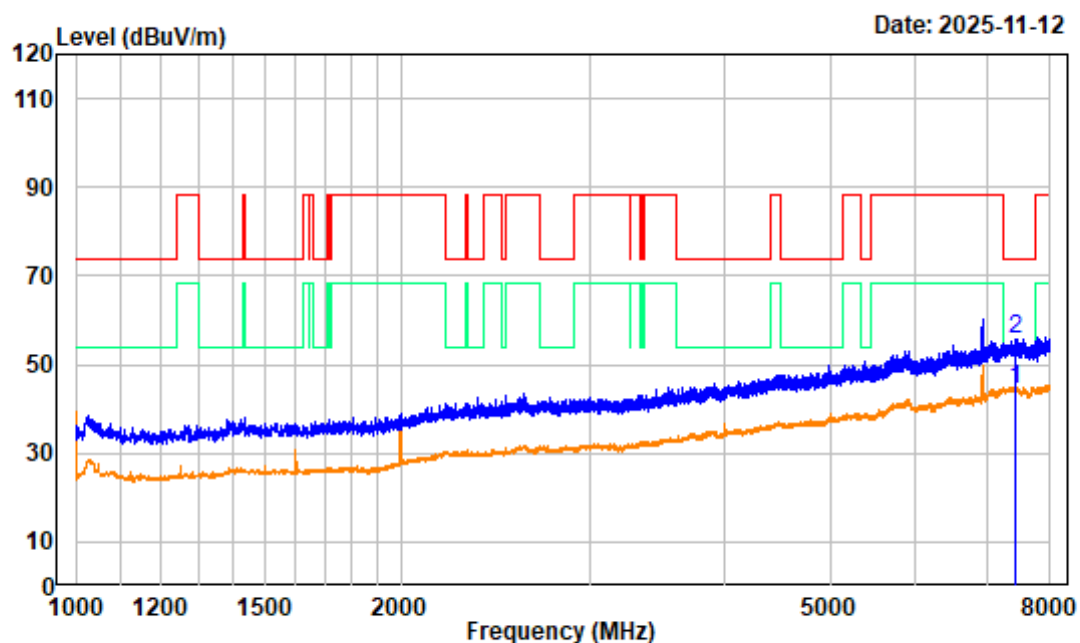

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Low Channel 6925MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7435.625	-1.01	45.26	44.25	54.00	-9.75	average
2	7435.625	-1.01	56.74	55.73	74.00	-18.27	peak


802.11be40 Low Channel 1GHz-8GHz_VERTICAL

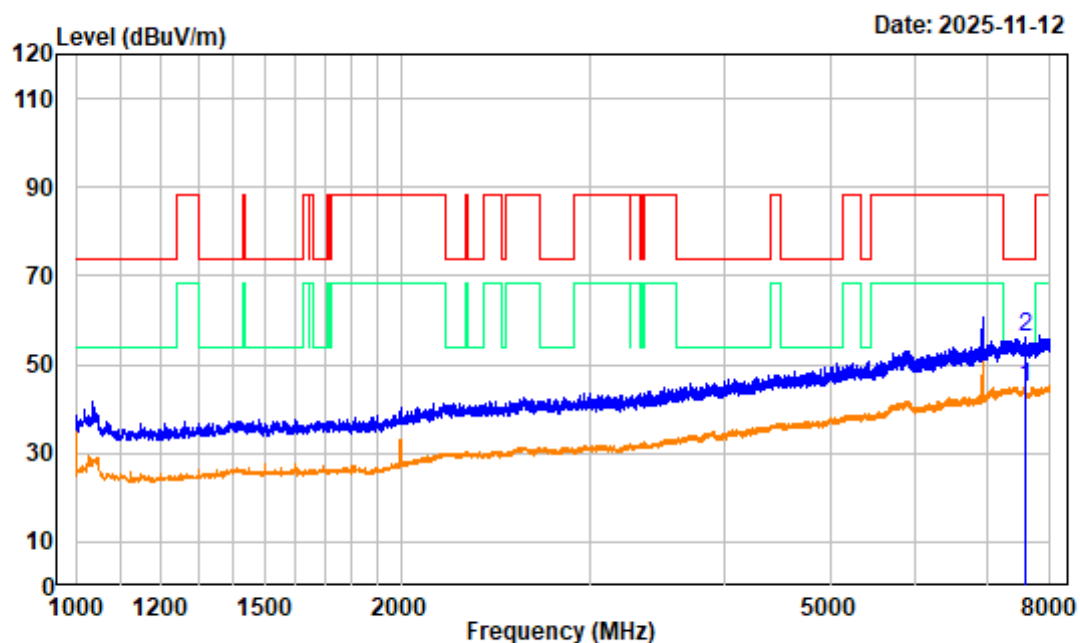

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Low Channel 6925MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7591.375	-1.24	45.96	44.72	54.00	-9.28	average
2	7591.375	-1.24	57.58	56.34	74.00	-17.66	peak


802.11be40 Low Channel 8GHz-18GHz_HORIZONTAL

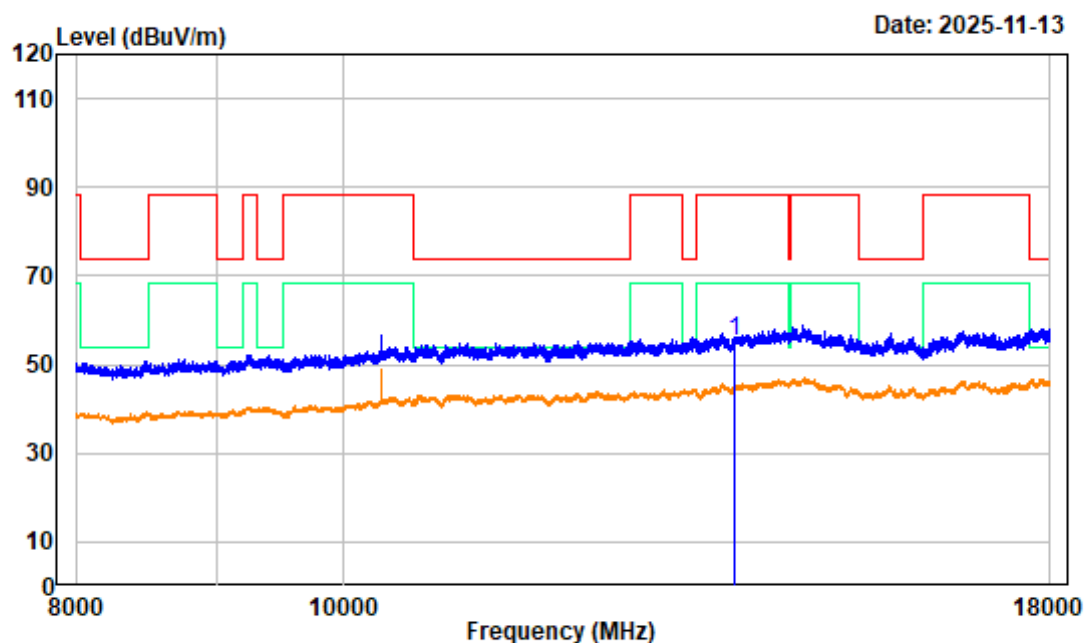

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Low Channel 6925MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13850.000	8.10	47.06	55.16	88.20	-33.04	Peak


802.11be40 Low Channel 8GHz-18GHz_VERTICAL

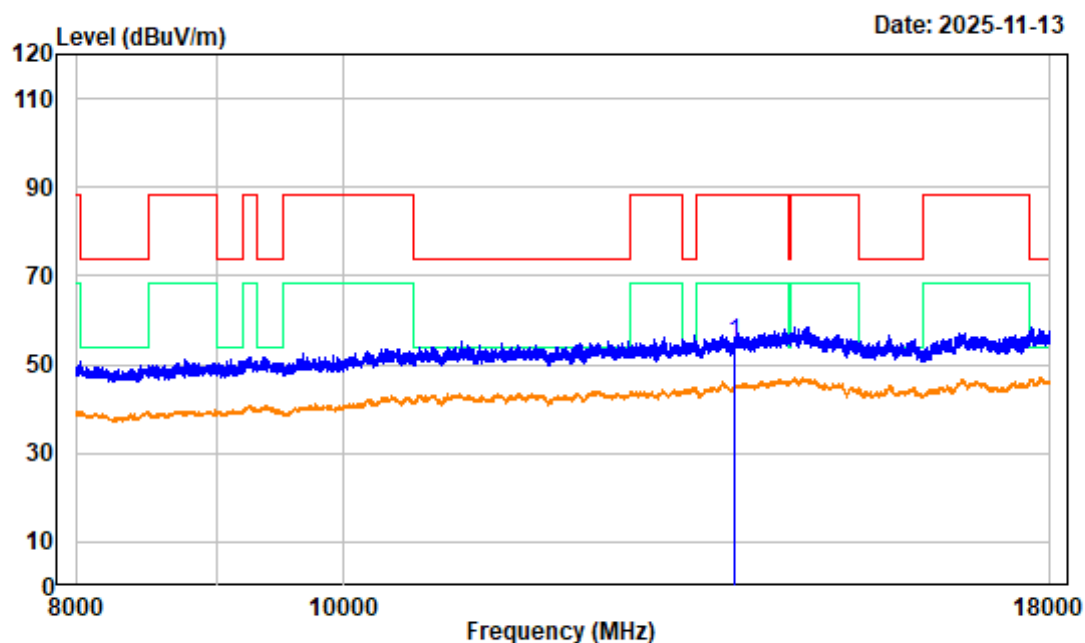

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Low Channel 6925MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13850.000	8.10	46.71	54.81	88.20	-33.39	Peak


802.11be40 Middle Channel 1GHz-8GHz_HORIZONTAL

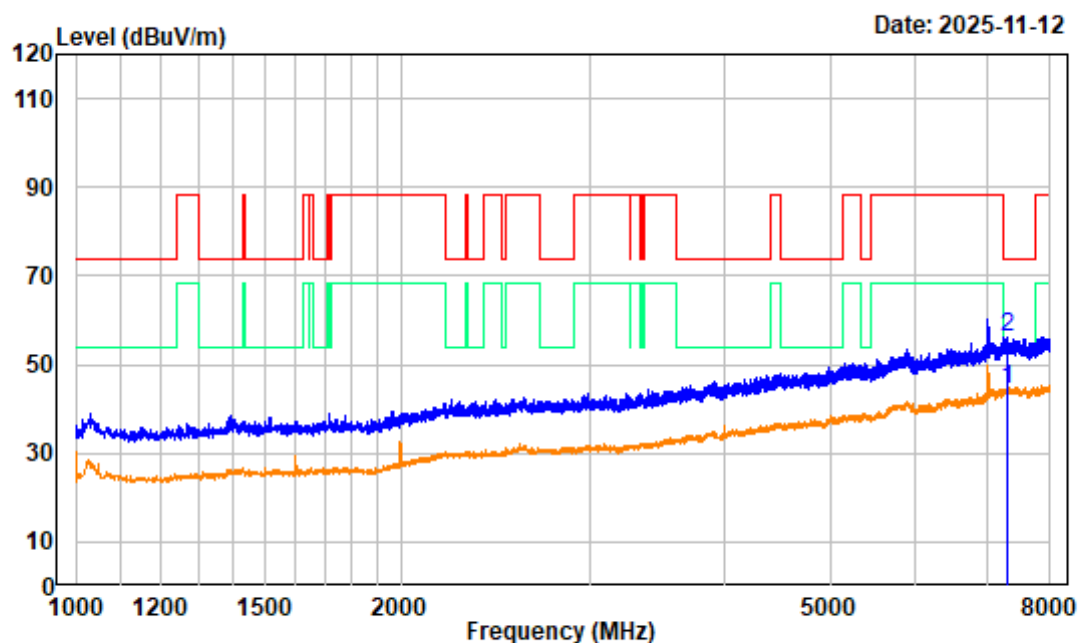

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Middle Channel 7005MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7307.000	-1.11	45.35	44.24	54.00	-9.76	average
2	7307.000	-1.11	57.38	56.27	74.00	-17.73	peak


802.11be40 Middle Channel 1GHz-8GHz_VERTICAL

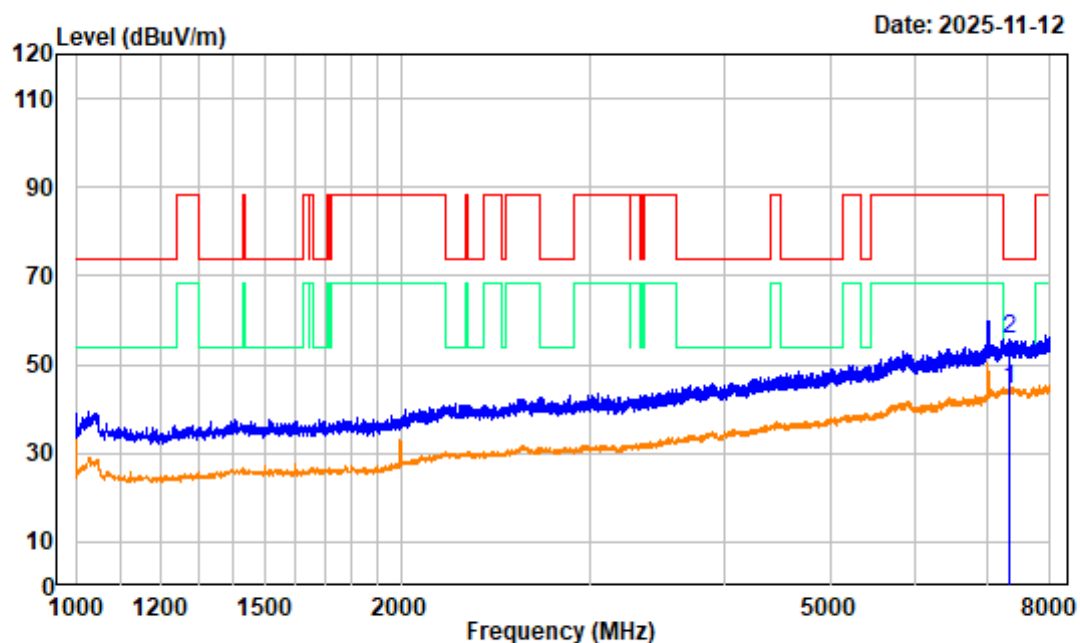

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Middle Channel 7005MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7343.750	-1.23	45.47	44.24	54.00	-9.76	average
2	7343.750	-1.23	56.84	55.61	74.00	-18.39	peak


802.11be40 Middle Channel 8GHz-18GHz_HORIZONTAL

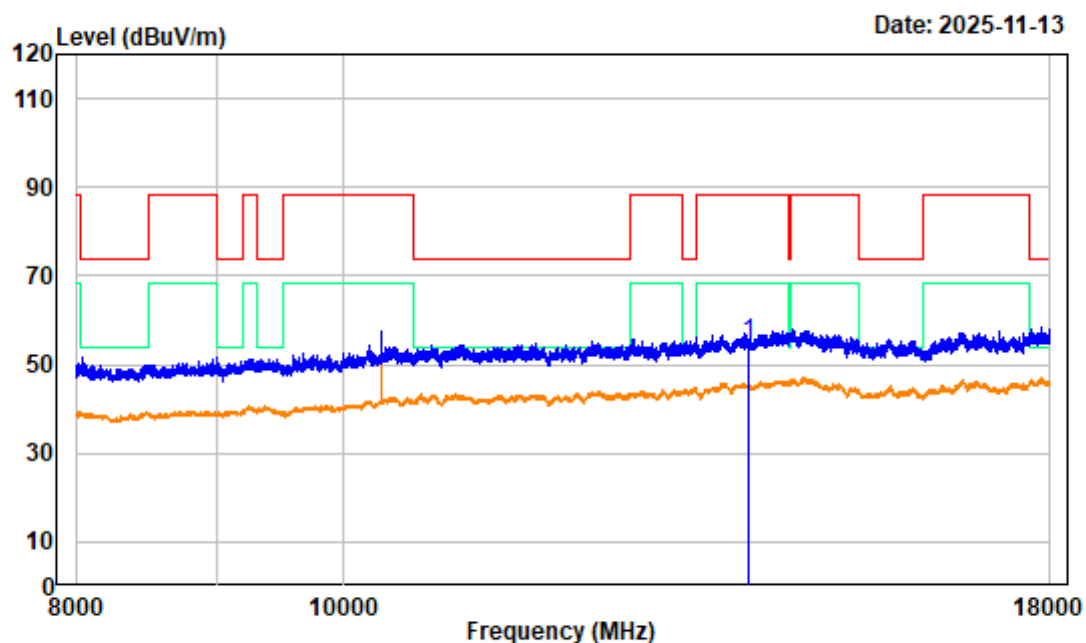

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Middle Channel 7005MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	14010.000	7.96	46.88	54.84	88.20	-33.36	Peak


802.11be40 Middle Channel 8GHz-18GHz_VERTICAL

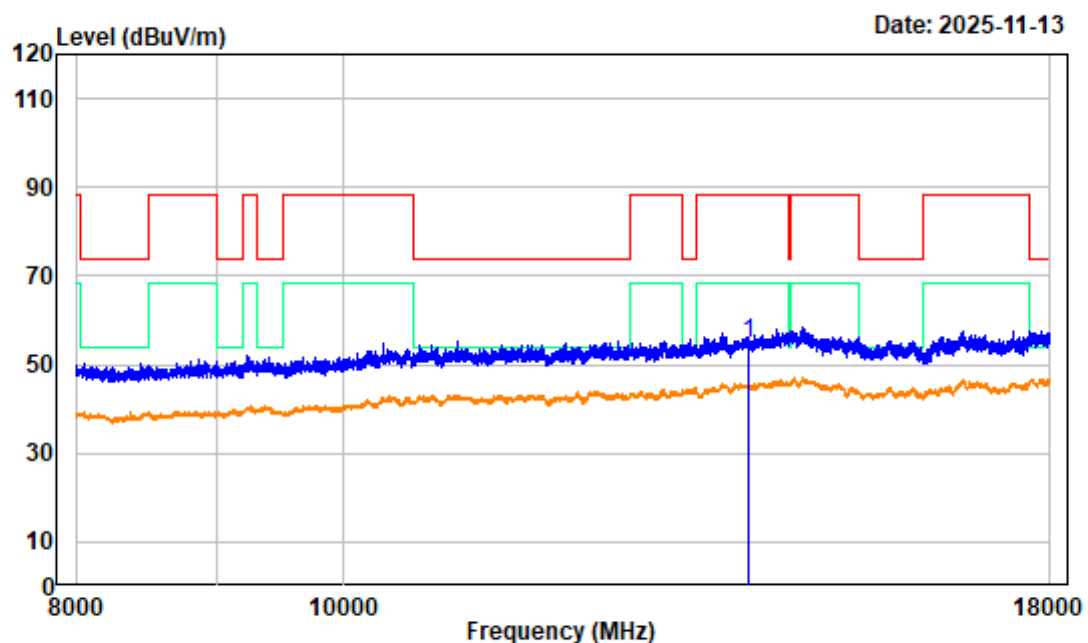

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Middle Channel 7005MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	14010.000	7.96	46.64	54.60	88.20	-33.60	Peak


802.11be40 High Channel 1GHz-8GHz_HORIZONTAL

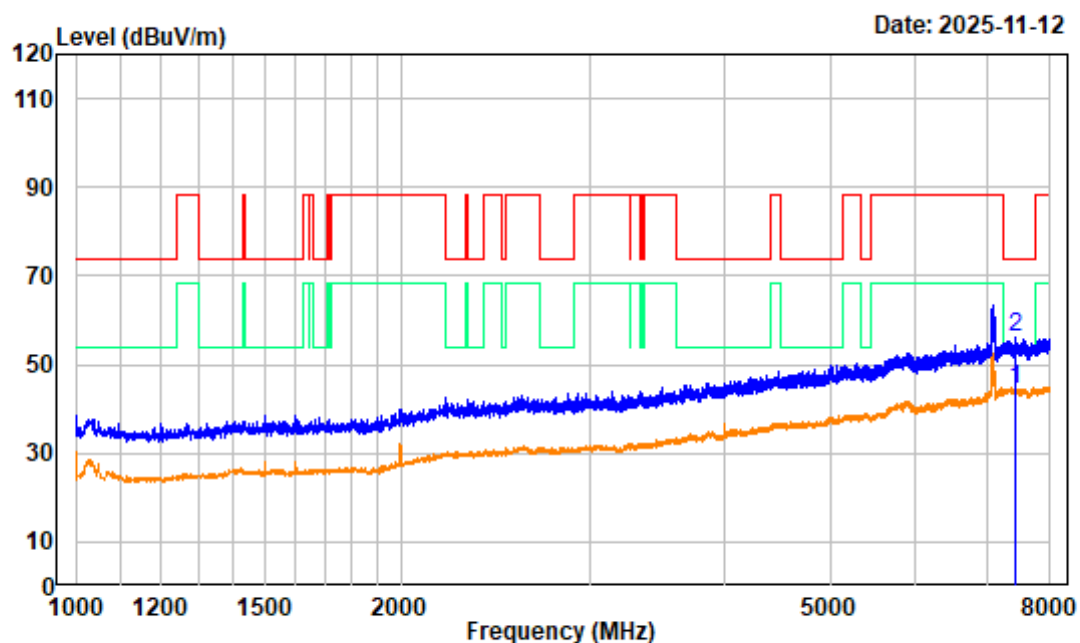

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 High Channel 7085MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7426.000	-1.11	45.27	44.16	54.00	-9.84	average
2	7426.000	-1.11	57.24	56.13	74.00	-17.87	peak

802.11be40 High Channel 1GHz-8GHz_VERTICAL

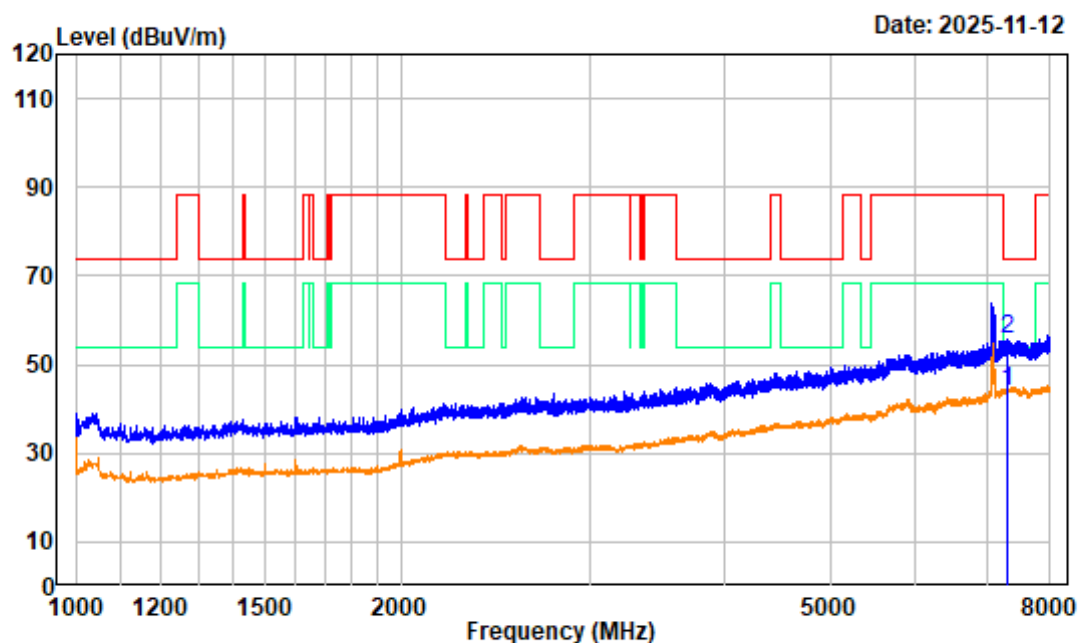

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504Z00193E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : 802.11be40 High Channel 7085MHz 1GHz-8GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7299.125	-1.09	45.10	44.01	54.00	-9.99	average
2	7299.125	-1.09	56.99	55.90	74.00	-18.10	peak


802.11be40 High Channel 8GHz-18GHz_HORIZONTAL

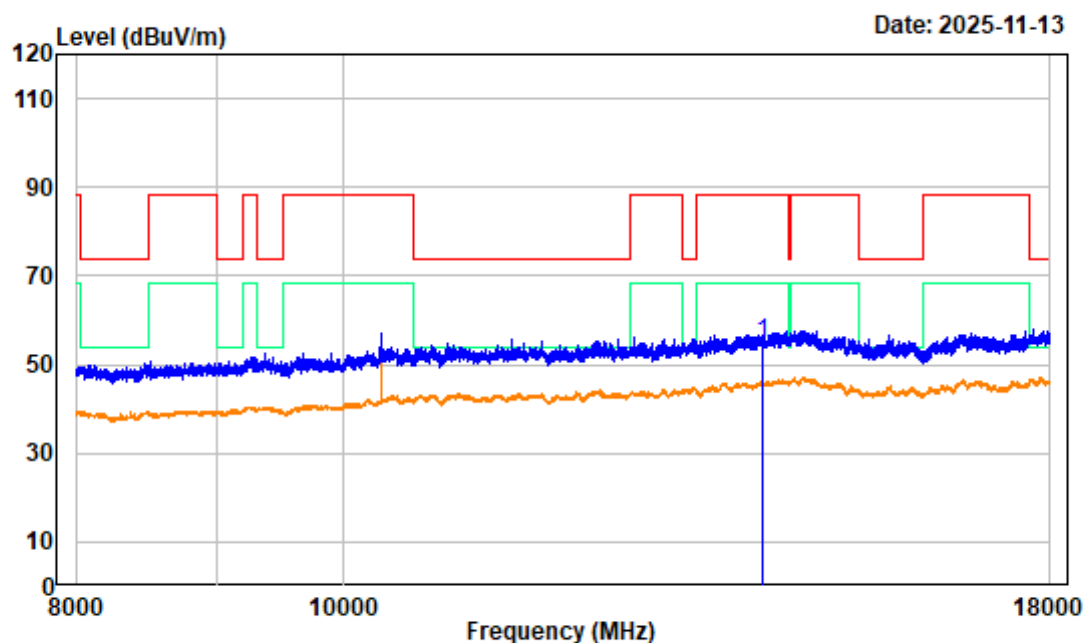

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 High Channel 7085MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq	Factor	Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 14170.000	8.13	46.68	54.81	88.20	-33.39	Peak


802.11be40 High Channel 8GHz-18GHz_VERTICAL

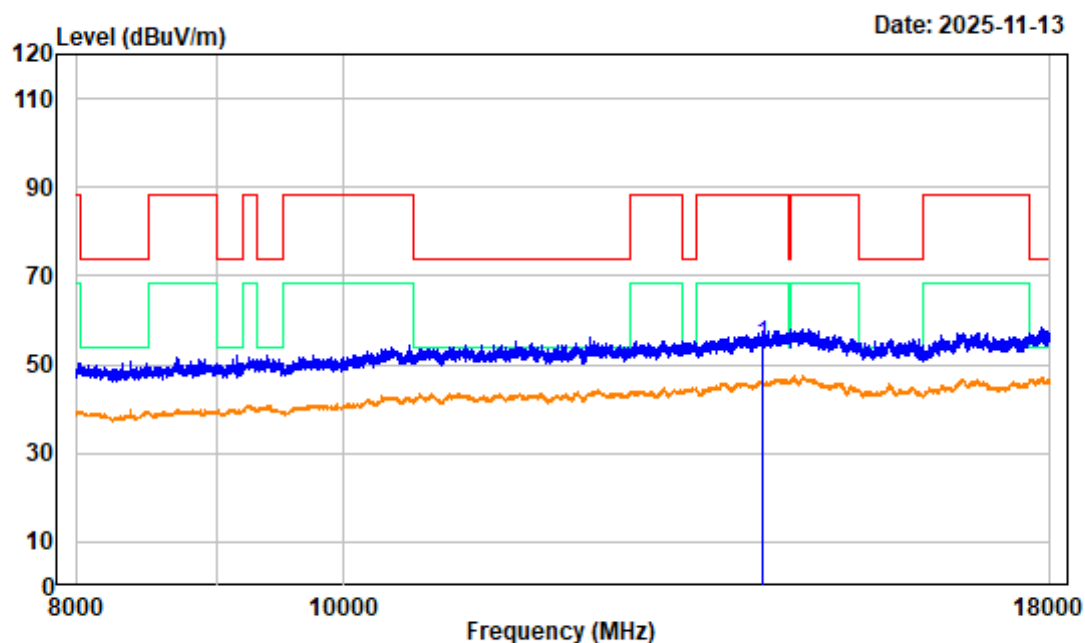

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 High Channel 7085MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	14170.000	8.13	46.12	54.25	88.20	-33.95	Peak


802.11be80 Low Channel 1GHz-8GHz_HORIZONTAL

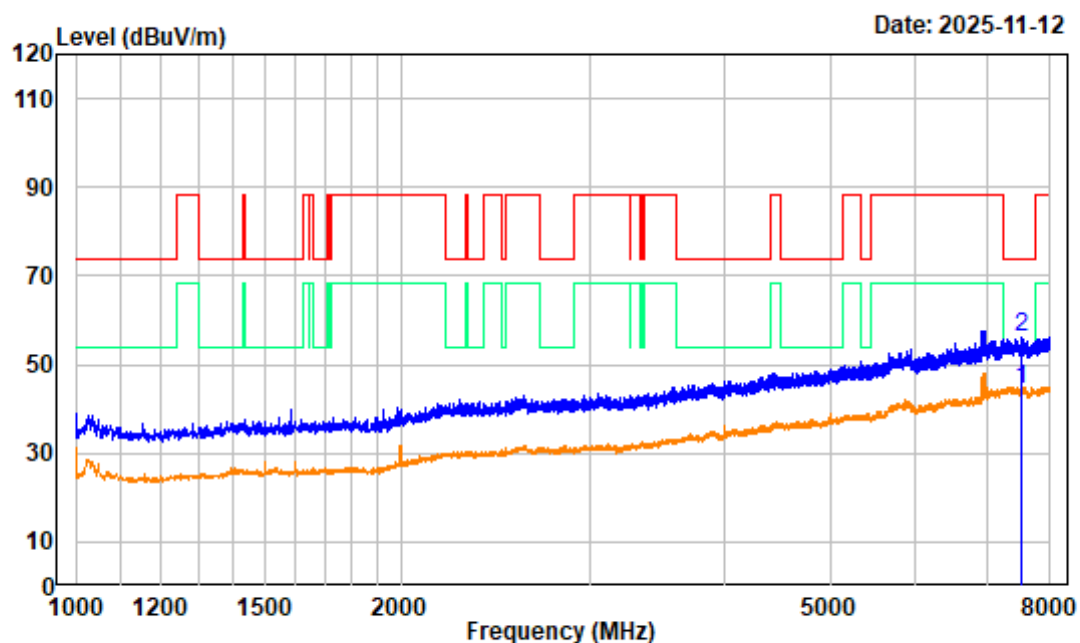

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Low Channel 6945MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7528.375	-0.94	45.31	44.37	54.00	-9.63	average
2	7528.375	-0.94	57.24	56.30	74.00	-17.70	peak

802.11be80 Low Channel 1GHz-8GHz_VERTICAL

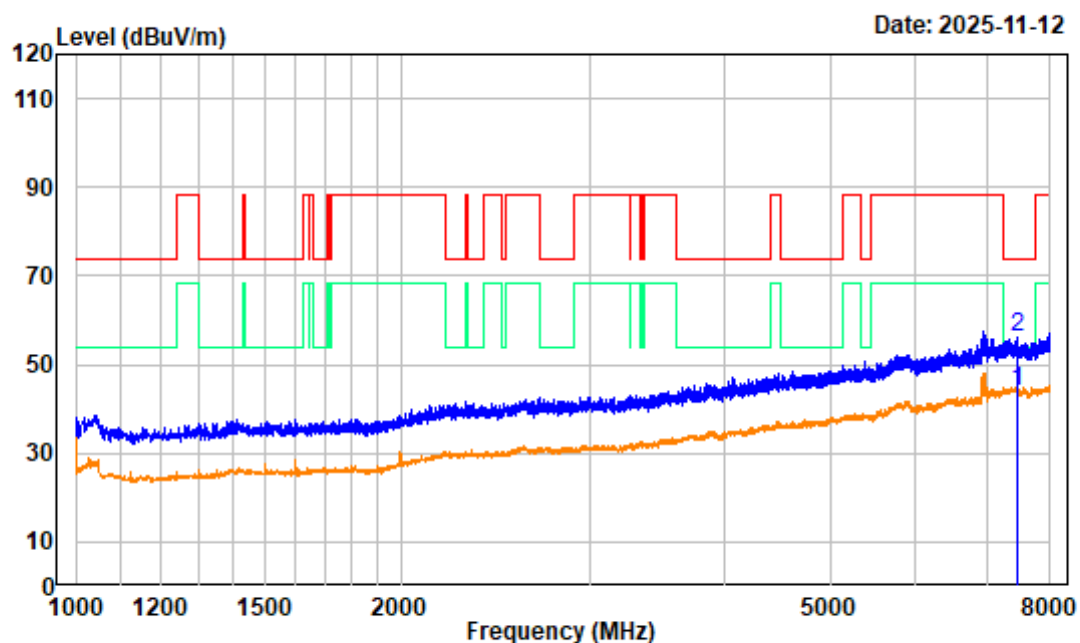

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504Z00193E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : 802.11be80 Low Channel 6945MHz 1GHz-8GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7448.750	-0.90	44.96	44.06	54.00	-9.94	average
2	7448.750	-0.90	57.12	56.22	74.00	-17.78	peak


802.11be80 Low Channel 8GHz-18GHz_HORIZONTAL

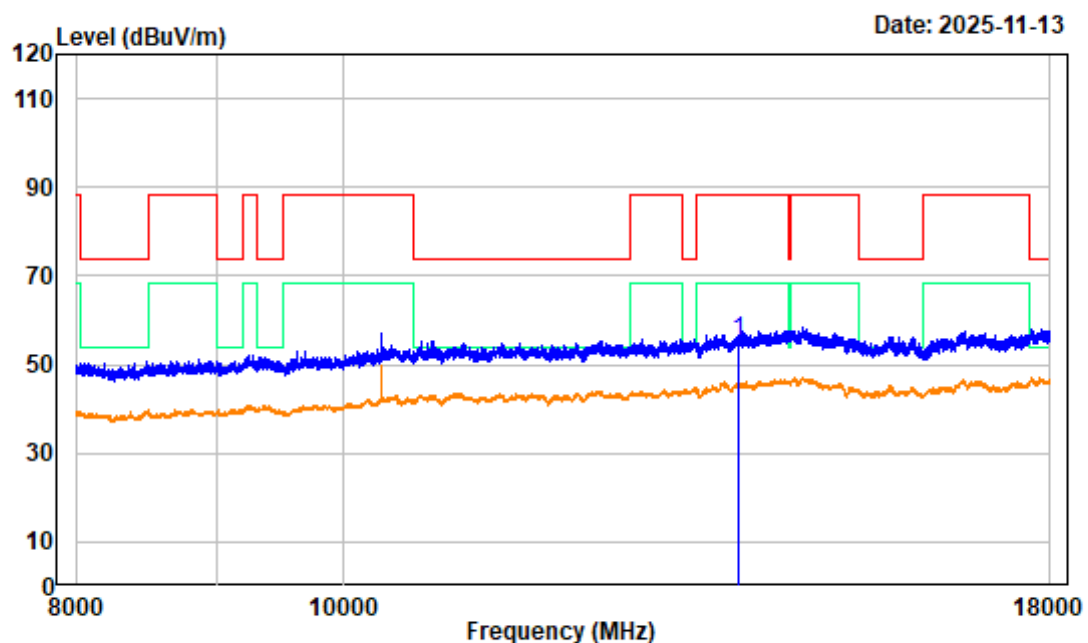

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Low Channel 6945MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13890.000	8.12	47.06	55.18	88.20	-33.02	Peak


802.11be80 Low Channel 8GHz-18GHz_VERTICAL

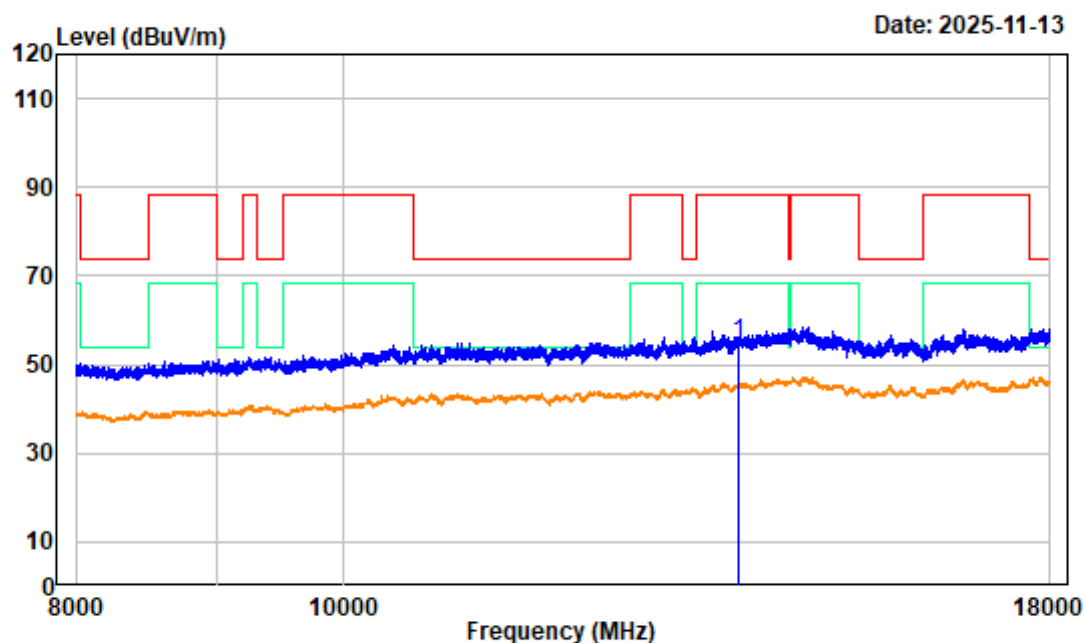

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Low Channel 6945MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13890.000	8.12	46.86	54.98	88.20	-33.22	Peak


802.11be80 High Channel 1GHz-8GHz_HORIZONTAL

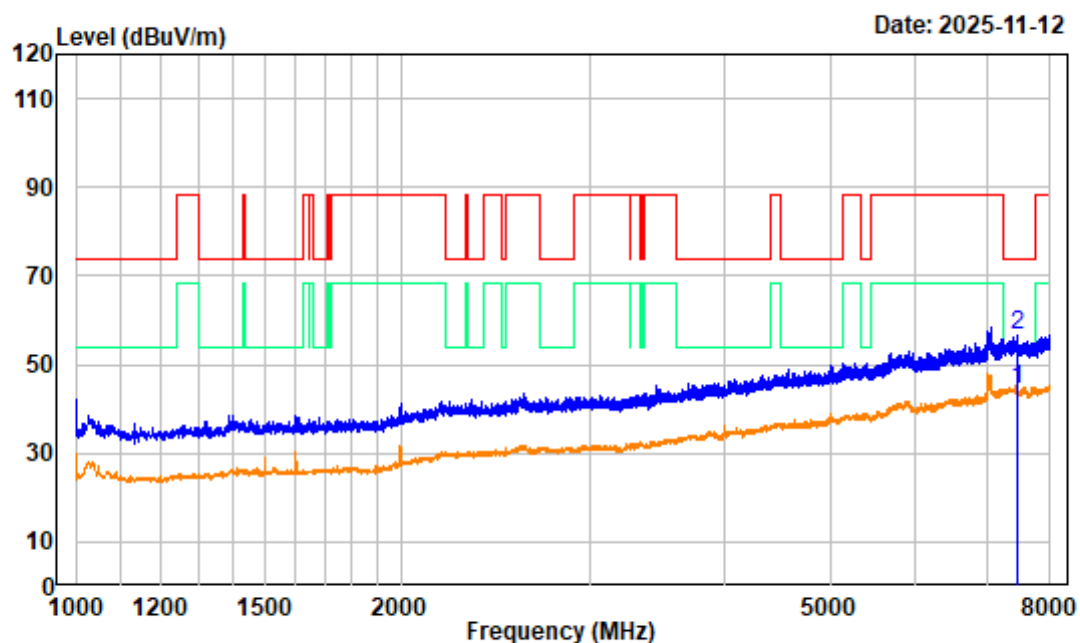

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 High Channel 7025MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7465.375	-0.90	45.39	44.49	54.00	-9.51	average
2	7465.375	-0.90	57.31	56.41	74.00	-17.59	peak


802.11be80 High Channel 1GHz-8GHz_VERTICAL

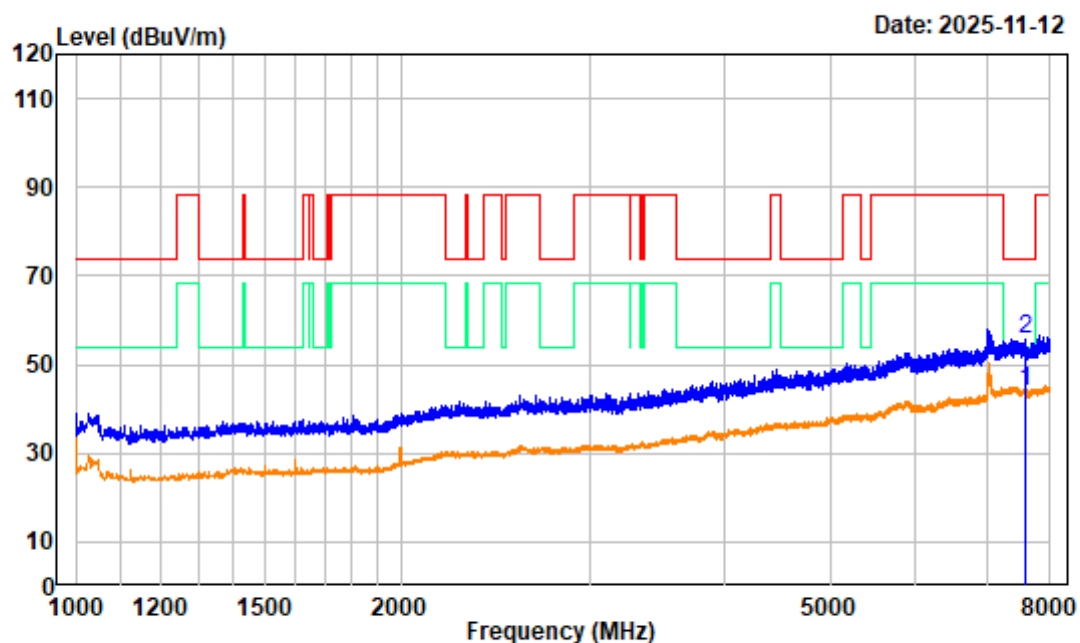

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 High Channel 7025MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7581.750	-1.18	45.22	44.04	54.00	-9.96	average
2	7581.750	-1.18	57.02	55.84	74.00	-18.16	peak


802.11be80 High Channel 8GHz-18GHz_HORIZONTAL

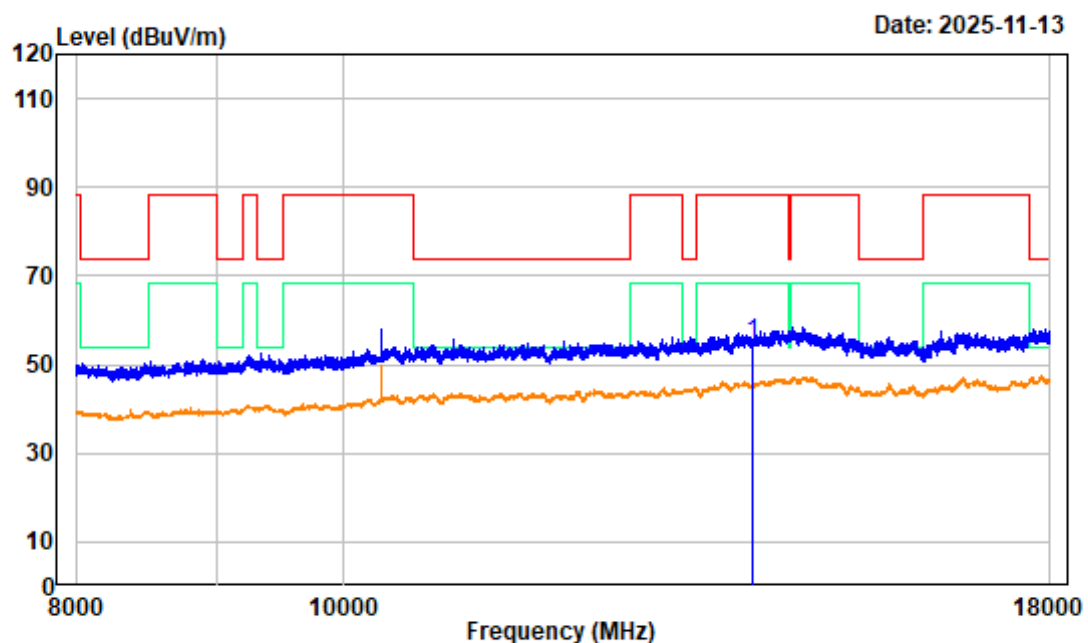

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 High Channel 7025MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	14050.000	7.77	46.99	54.76	88.20	-33.44	Peak


802.11be80 High Channel 8GHz-18GHz_VERTICAL

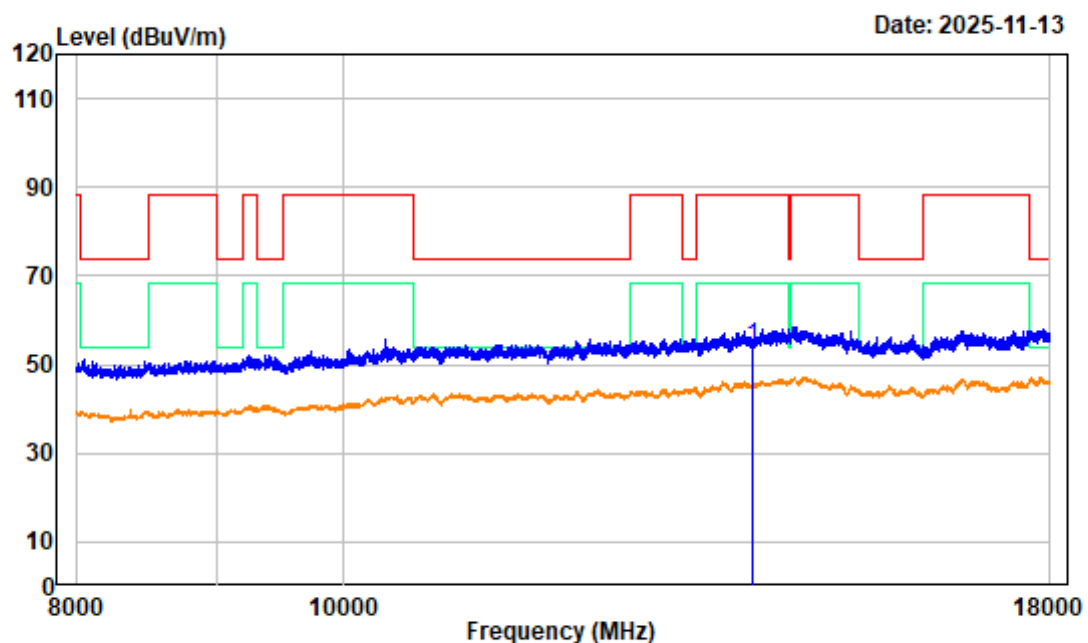

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 High Channel 7025MHz 8GHz-18GHz
 SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	14050.000	7.77	46.25	54.02	88.20	-34.18	Peak


802.11be160 Middle Channel 1GHz-8GHz_HORIZONTAL

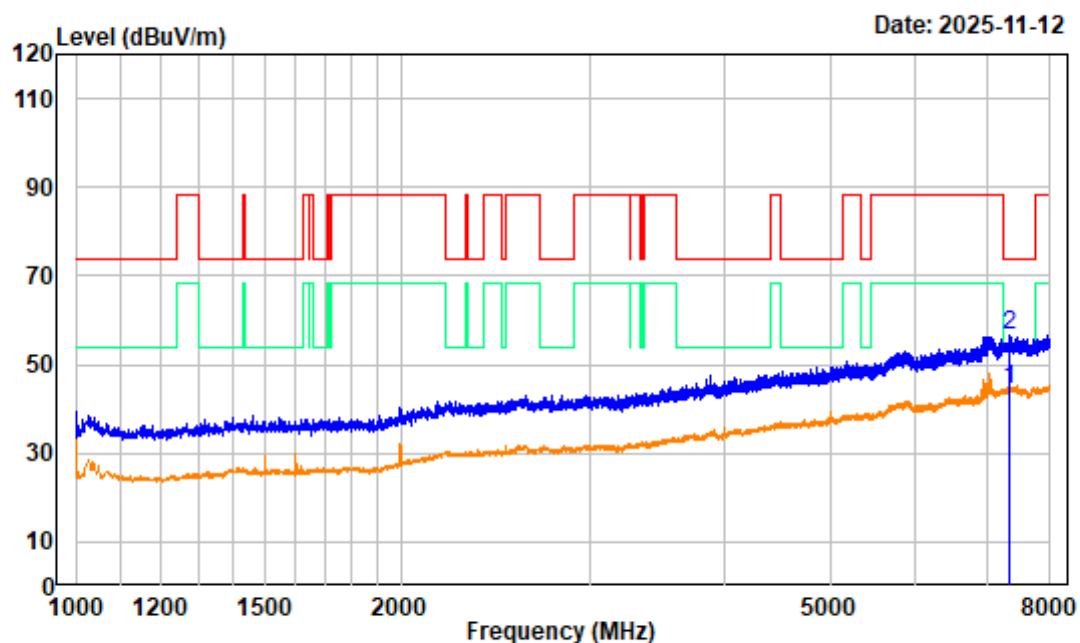

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Middle Channel 6985MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7337.625	-1.21	45.80	44.59	54.00	-9.41	average
2	7337.625	-1.21	57.76	56.55	74.00	-17.45	peak


802.11be160 Middle Channel 1GHz-8GHz_VERTICAL

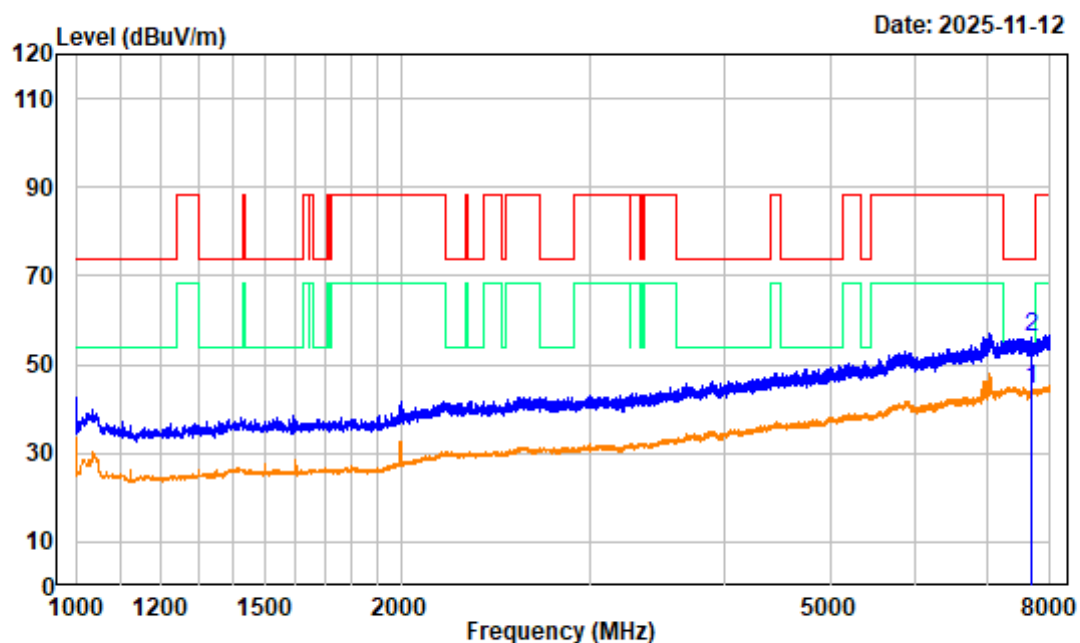

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Middle Channel 6985MHz 1GHz-8GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7701.625	-0.71	45.25	44.54	54.00	-9.46	average
2	7701.625	-0.71	56.88	56.17	74.00	-17.83	peak

802.11be160 Middle Channel 8GHz-18GHz_HORIZONTAL

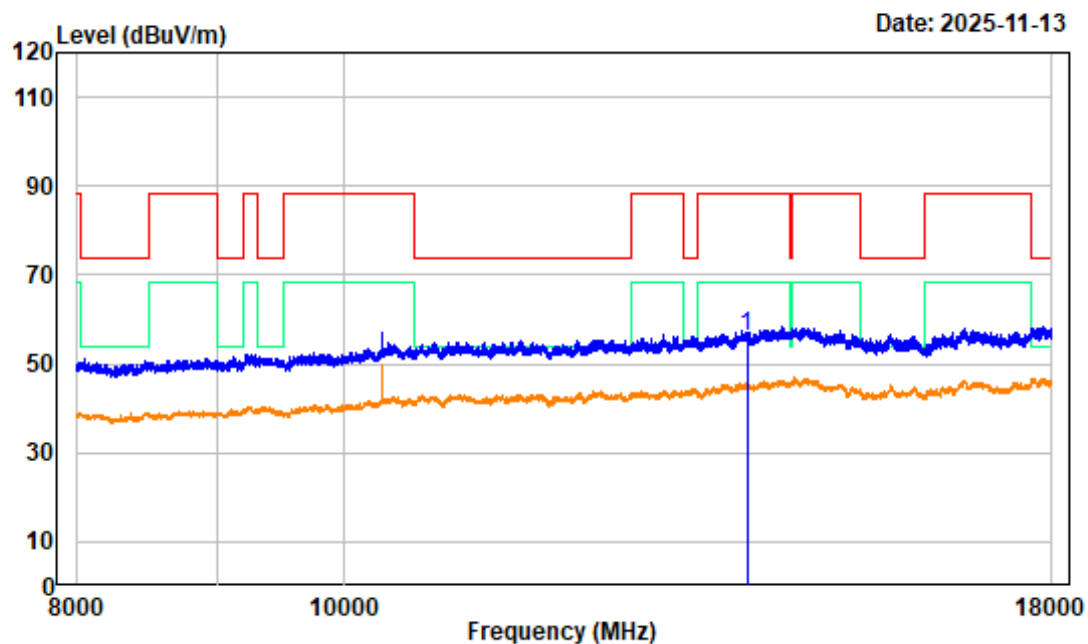

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504Z00193E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : 802.11be160 Middle Channel 6985MHz 8GHz-18GHz

SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13970.000	8.07	48.08	56.15	88.20	-32.05	Peak

802.11be160 Middle Channel 8GHz-18GHz_VERTICAL

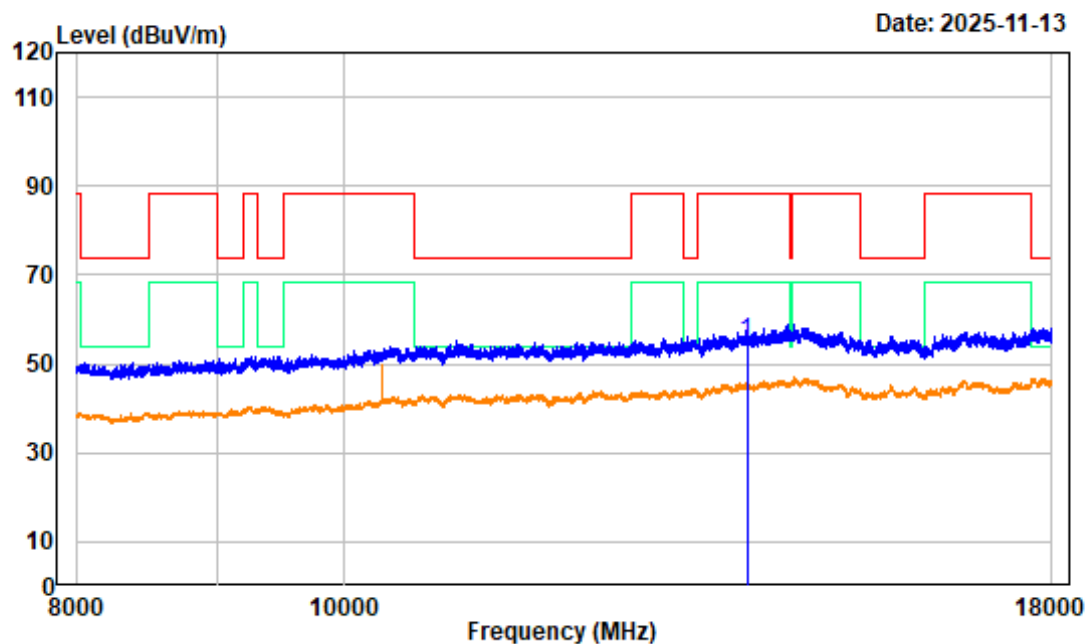

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504Z00193E-RF

Test Mode : Transmitting Tester:Kevin Lv


Note : 802.11be160 Middle Channel 6985MHz 8GHz-18GHz

SA setting : RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13970.000	8.07	46.61	54.68	88.20	-33.52	Peak

Note: For 18GHz~40GHz, after pre-scan the maximum output power mode and channel was tested.


802.11be320 Additional Channel 18GHz-40GHz_HORIZONTAL

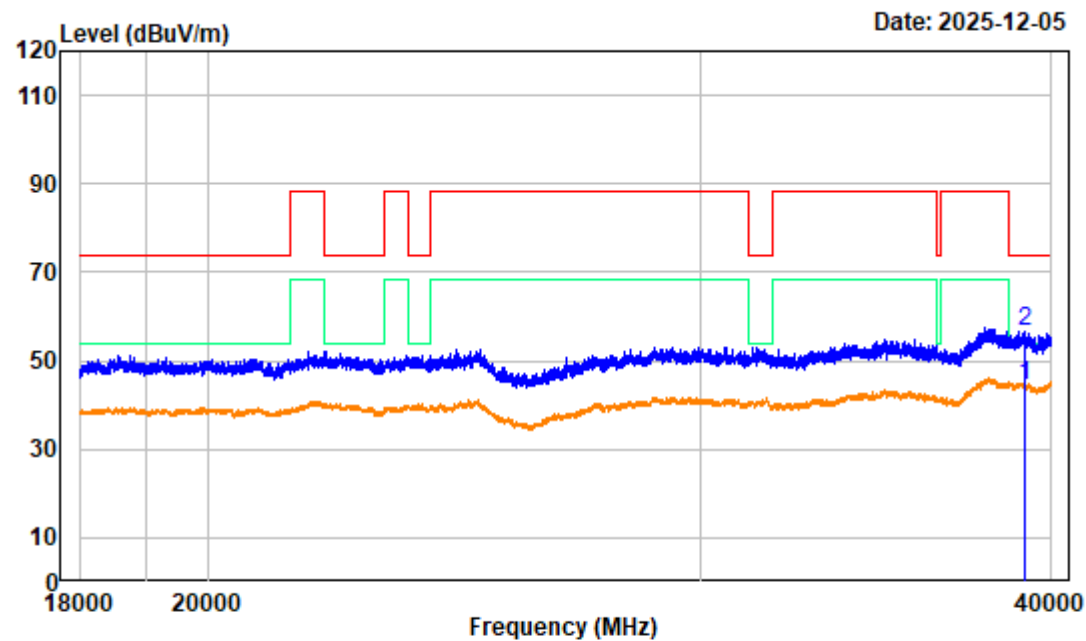

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504Z00193E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11be320 Additional Channel 6745MHz 18GHz-40GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 39164.000	5.49	38.94	44.43	54.00	-9.57	Average
2 39164.000	5.49	50.91	56.40	74.00	-17.60	Peak

802.11be320 Additional Channel 18GHz-40GHz_VERTICAL

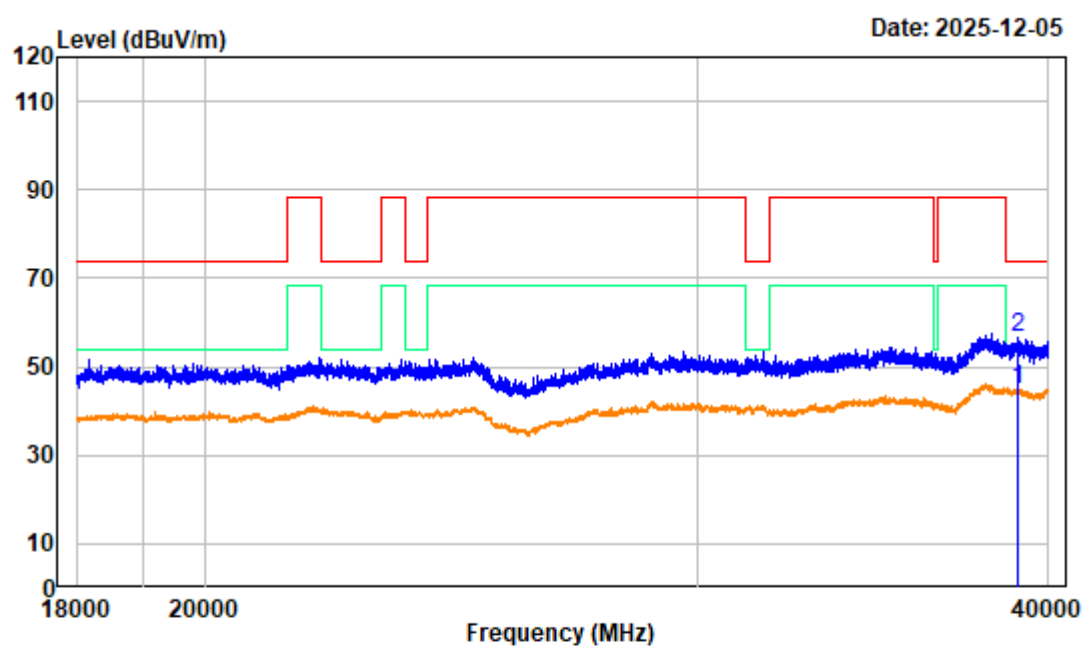

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504Z00193E-RF

Test Mode : Transmitting Tester:Kevin Lv

Note : 802.11be320 Additional Channel 6745MHz 18GHz-40GHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 39032.000	6.14	38.61	44.75	54.00	-9.25	Average
2 39032.000	6.14	50.57	56.71	74.00	-17.29	Peak

Bandedge:

U-NII 5 Band(5925-6425 MHz)


802.11be20 Low Channel Bandedge_HORIZONTAL

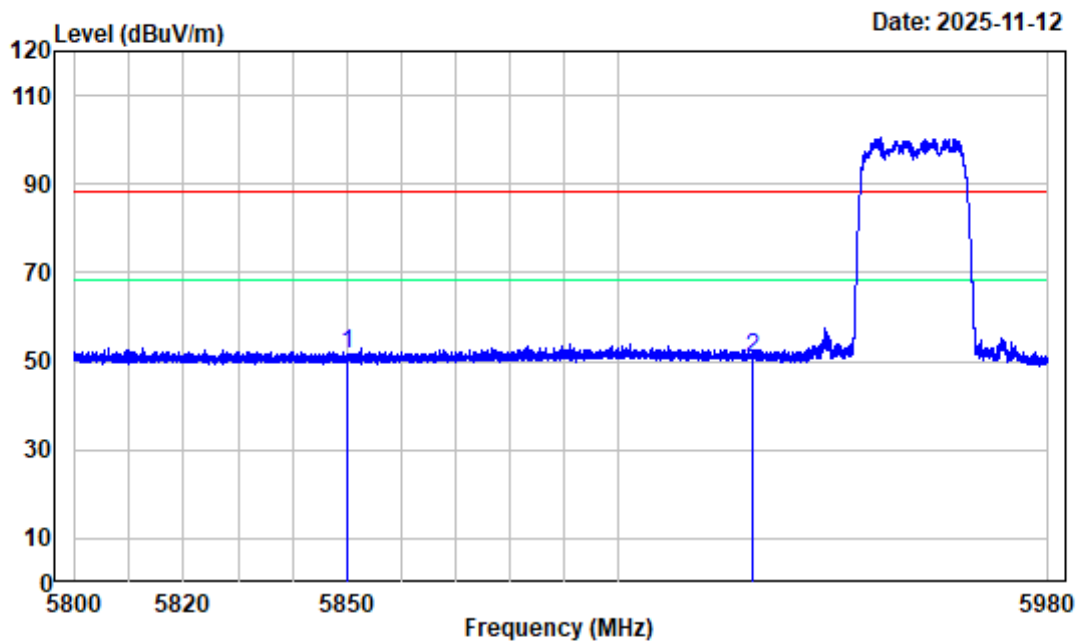

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504Z00193E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11be20 Low Channel 5955MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	56.01	51.47	88.20	-36.73	peak
2	5925.000	-4.27	54.93	50.66	88.20	-37.54	peak


802.11be20 Low Channel Bandedge_VERTICAL

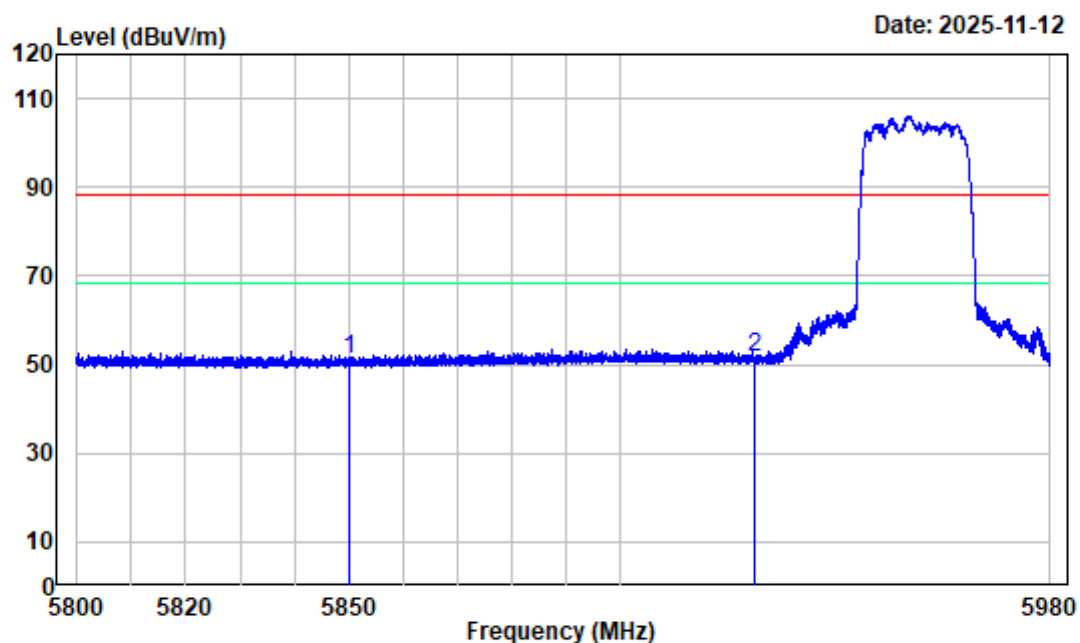

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 Low Channel 5955MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	55.72	51.18	88.20	-37.02	peak
2	5925.000	-4.27	55.68	51.41	88.20	-36.79	peak


802.11be40 Low Channel Bandedge_HORIZONTAL

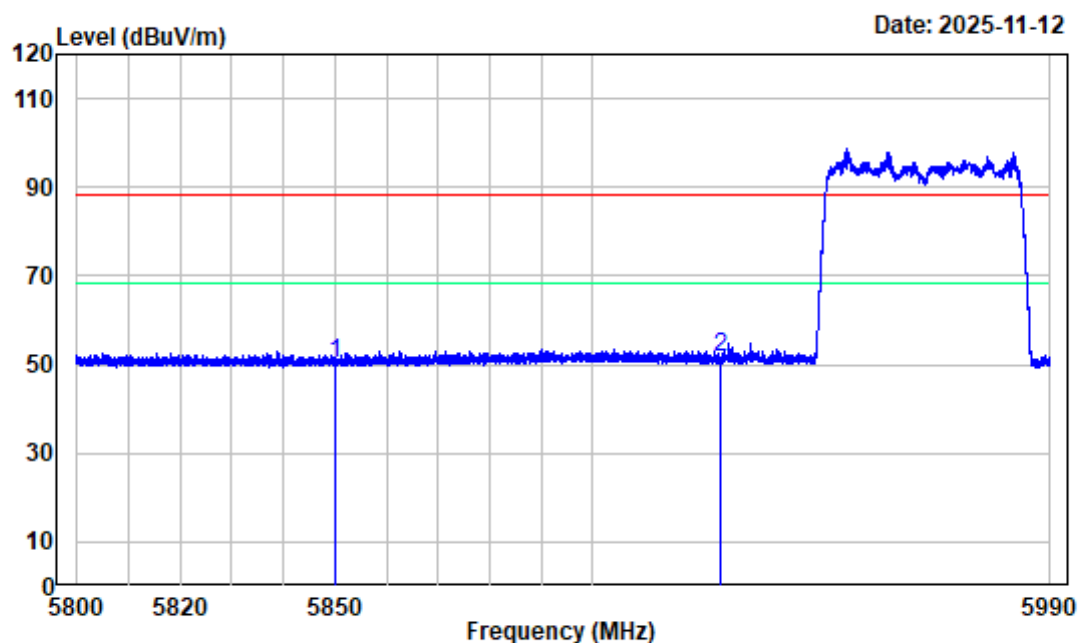

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Low Channel 5965MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	54.73	50.19	88.20	-38.01	peak
2	5925.000	-4.27	55.79	51.52	88.20	-36.68	peak


802.11be40 Low Channel Bandedge_VERTICAL

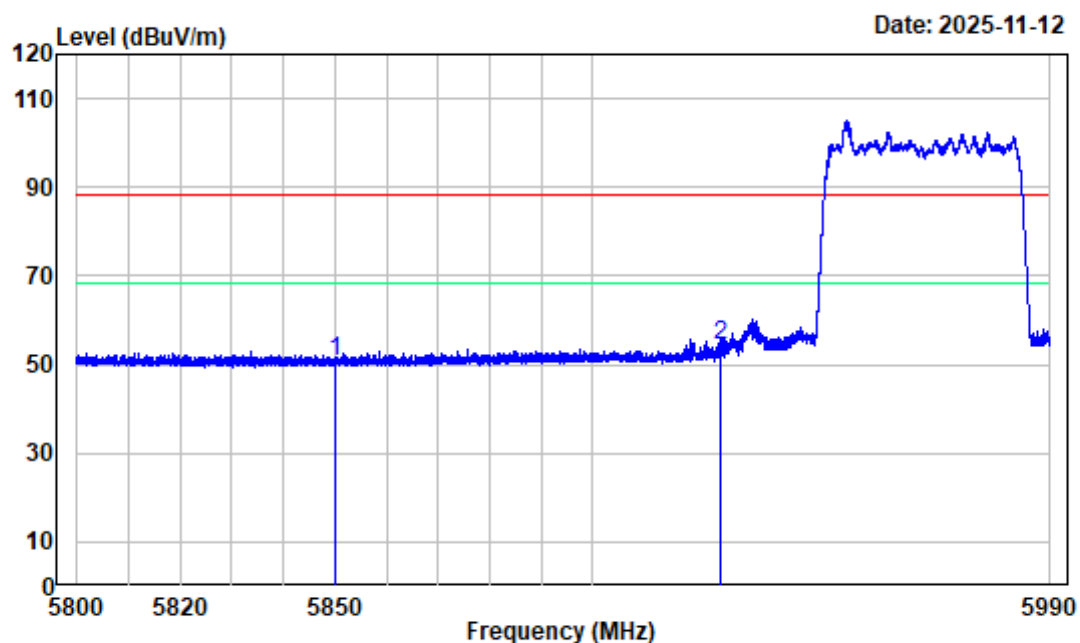

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 Low Channel 5965MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	55.05	50.51	88.20	-37.69	peak
2	5925.000	-4.27	58.81	54.54	88.20	-33.66	peak

802.11be80 Low Channel Bandedge_HORIZONTAL

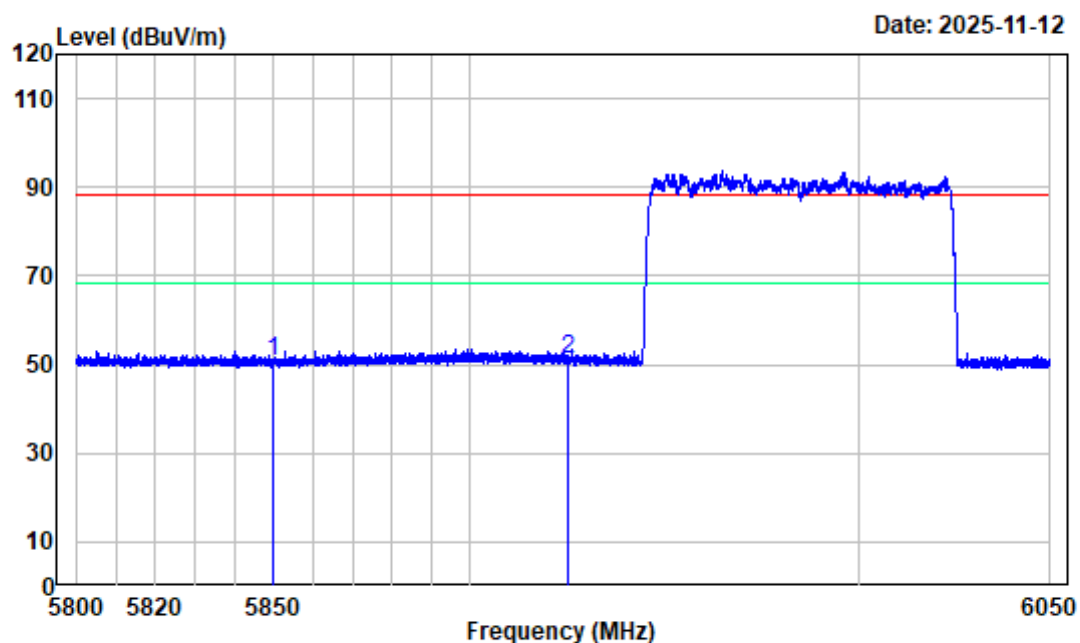

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504Z00193E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : 802.11be80 Low Channel 5985MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	55.07	50.53	88.20	-37.67	peak
2	5925.000	-4.27	55.45	51.18	88.20	-37.02	peak


802.11be80 Low Channel Bandedge_VERTICAL

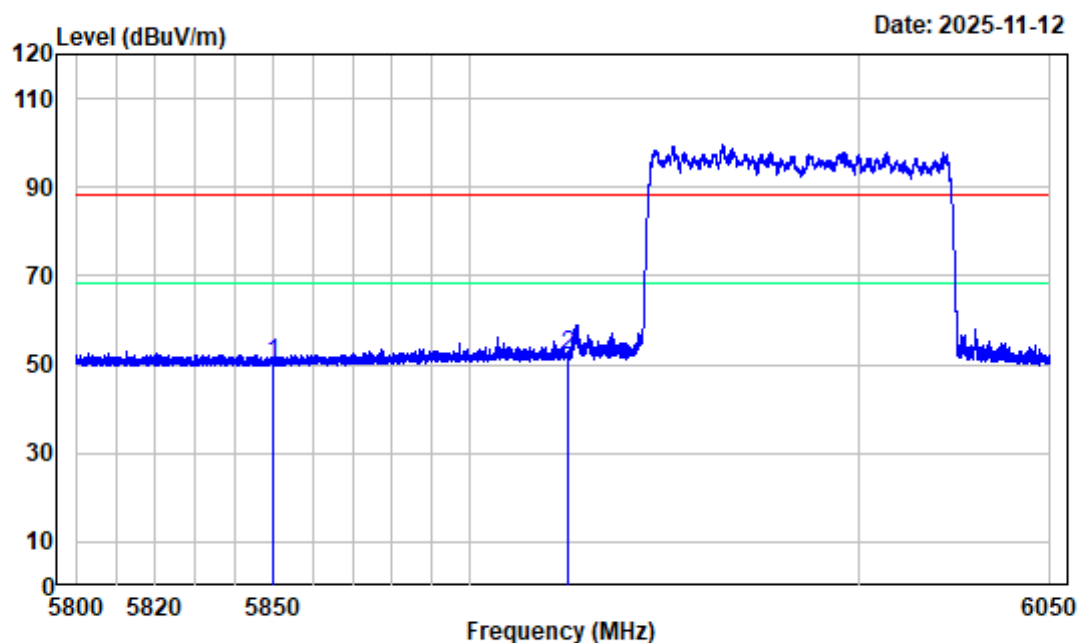

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be80 Low Channel 5985MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	55.01	50.47	88.20	-37.73	peak
2	5925.000	-4.27	56.46	52.19	88.20	-36.01	peak


802.11be160 Low Channel Bandedge_HORIZONTAL

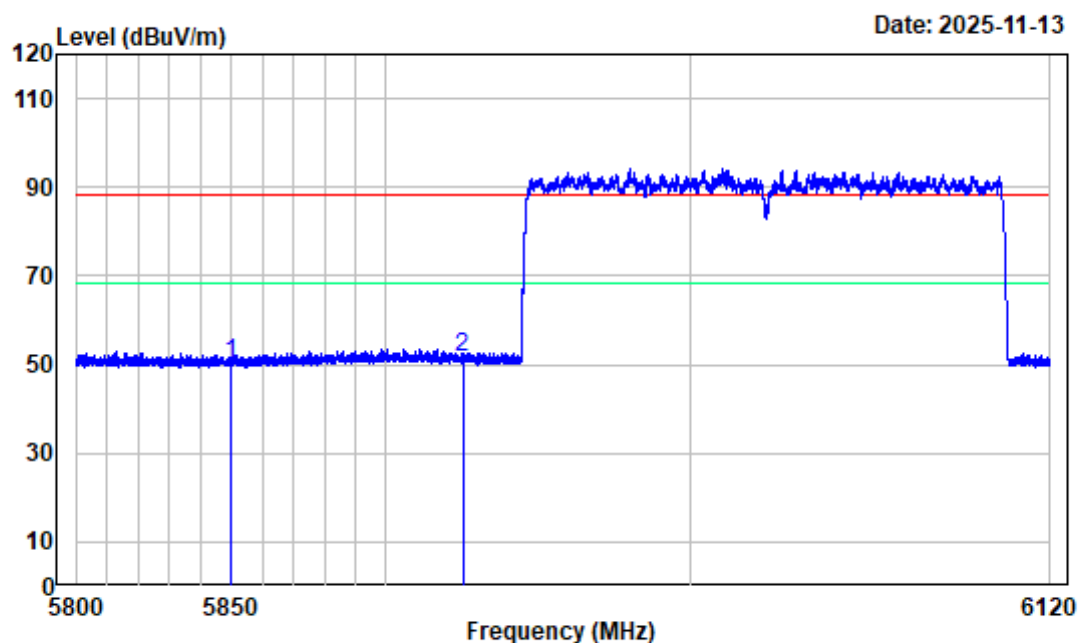

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Low Channel 6025MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	54.88	50.34	88.20	-37.86	peak
2	5925.000	-4.27	55.82	51.55	88.20	-36.65	peak


802.11be160 Low Channel Bandedge_VERTICAL

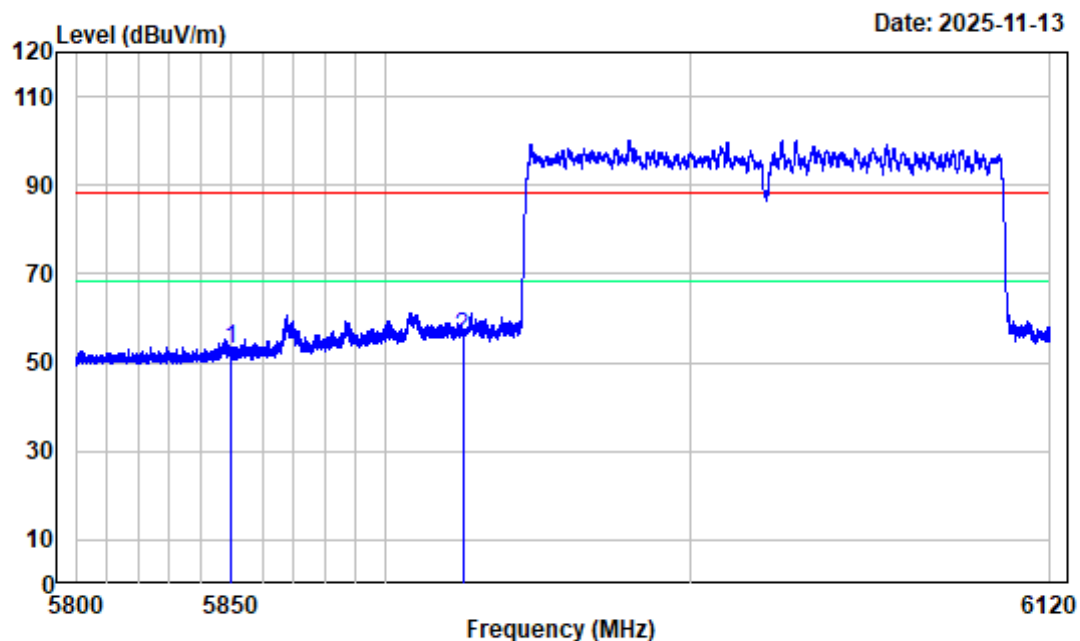

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 Low Channel 6025MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	57.74	53.20	88.20	-35.00	peak
2	5925.000	-4.27	59.90	55.63	88.20	-32.57	peak


802.11be320 Low Channel Bandedge_HORIZONTAL

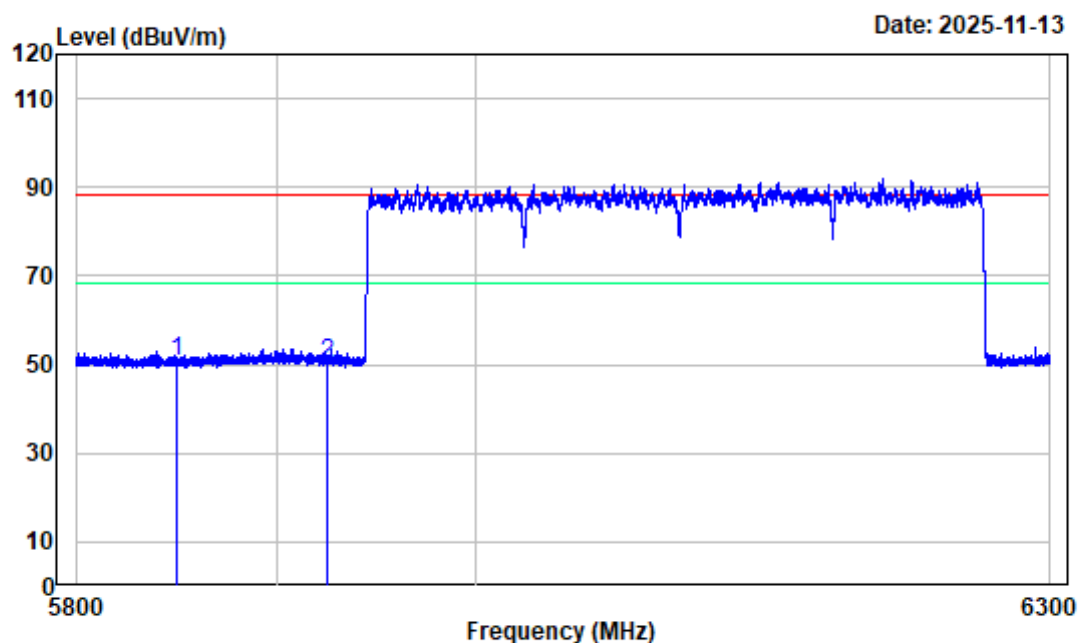

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 Low Channel 6105MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	55.35	50.81	88.20	-37.39	peak
2	5925.000	-4.27	54.46	50.19	88.20	-38.01	peak

802.11be320 Low Channel Bandedge_VERTICAL

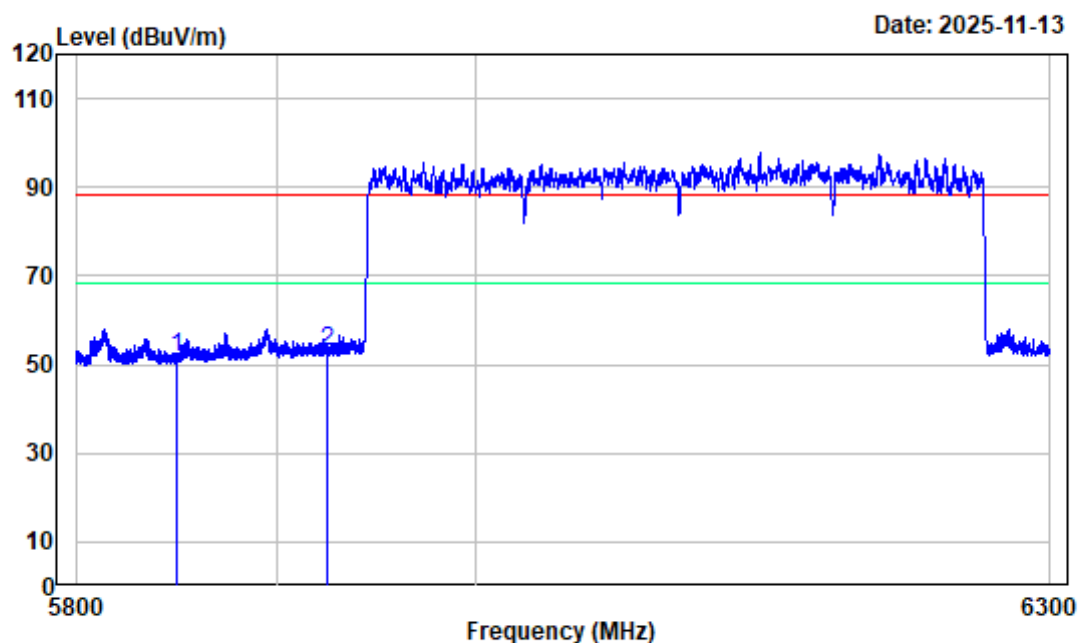


Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be320 Low Channel 6105MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	56.10	51.56	88.20	-36.64	peak
2	5925.000	-4.27	57.07	52.80	88.20	-35.40	peak

U-NII 8 Band (6875-7125 MHz)


802.11be20 High Channel Bandedge_HORIZONTAL

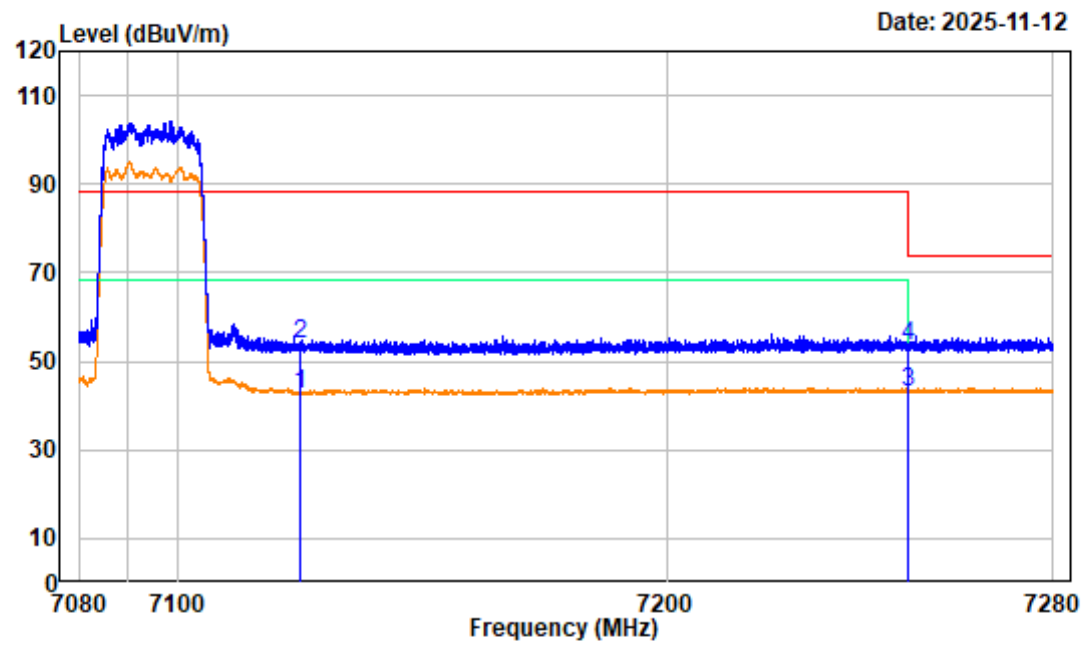

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504Z00193E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11be20 High Channel 7095MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBUV/m	dBUV/m	dB	
1	7125.000	-1.38	44.06	42.68	68.20	-25.52	Average
2	7125.000	-1.38	55.44	54.06	88.20	-34.14	peak
3	7250.000	-1.30	44.47	43.17	54.00	-10.83	Average
4	7250.000	-1.30	54.82	53.52	74.00	-20.48	peak


802.11be20 High Channel Bandedge_VERTICAL

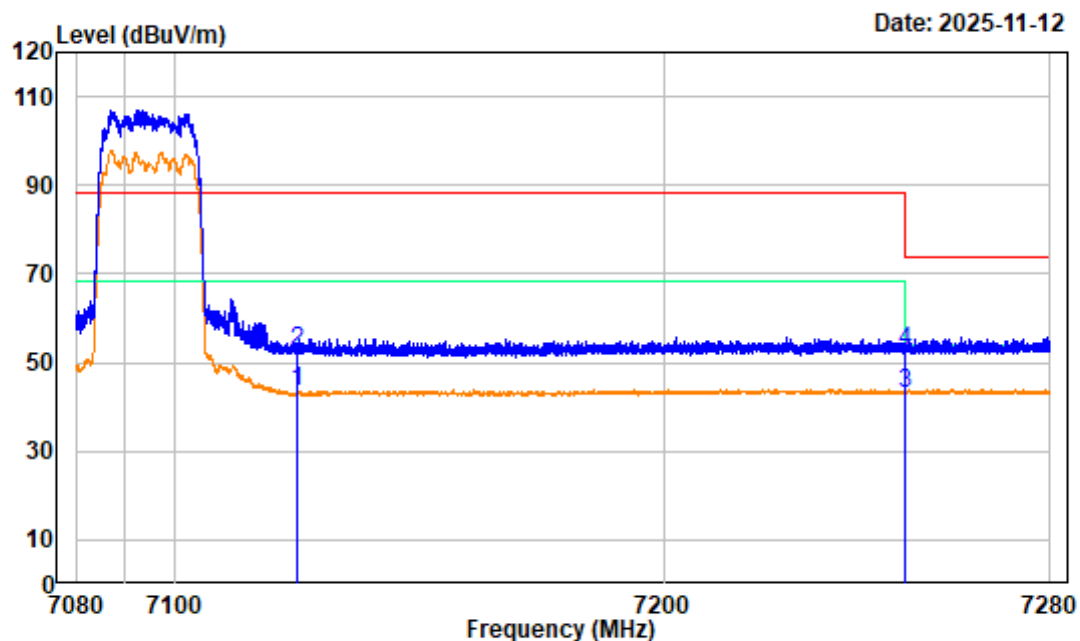

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be20 High Channel 7095MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7125.000	-1.38	44.78	43.40	68.20	-24.80	Average
2	7125.000	-1.38	54.10	52.72	88.20	-35.48	peak
3	7250.000	-1.30	44.44	43.14	54.00	-10.86	Average
4	7250.000	-1.30	53.90	52.60	74.00	-21.40	peak


802.11be40 High Channel Bandedge_HORIZONTAL

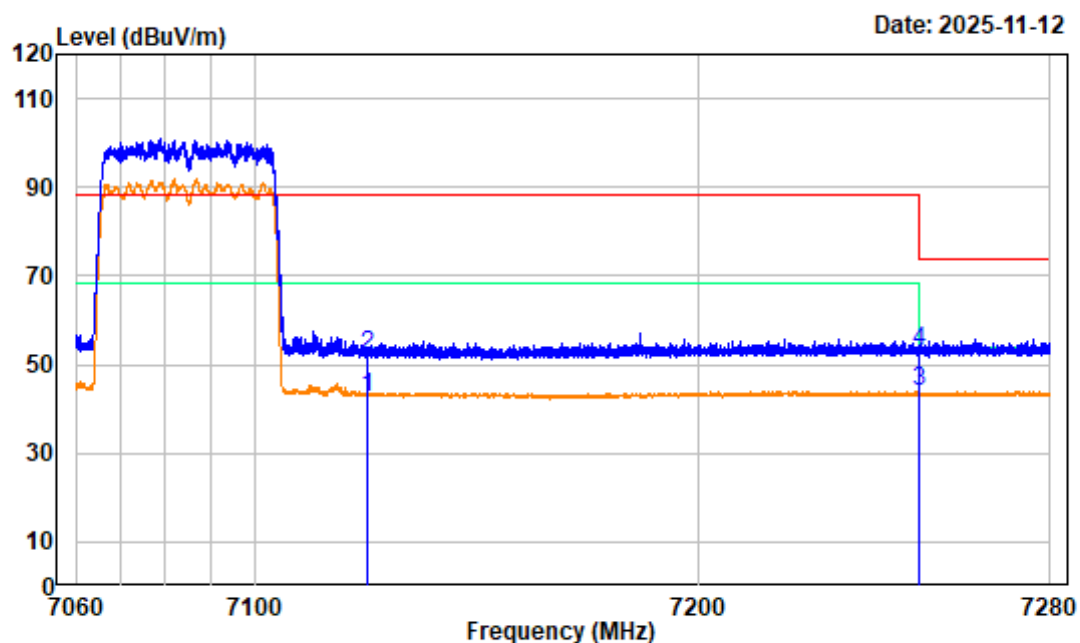

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 High Channel 7085MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7125.000	-1.38	44.14	42.76	68.20	-25.44	Average
2	7125.000	-1.38	53.35	51.97	88.20	-36.23	peak
3	7250.000	-1.30	45.04	43.74	54.00	-10.26	Average
4	7250.000	-1.30	54.27	52.97	74.00	-21.03	peak


802.11be40 High Channel Bandedge_VERTICAL

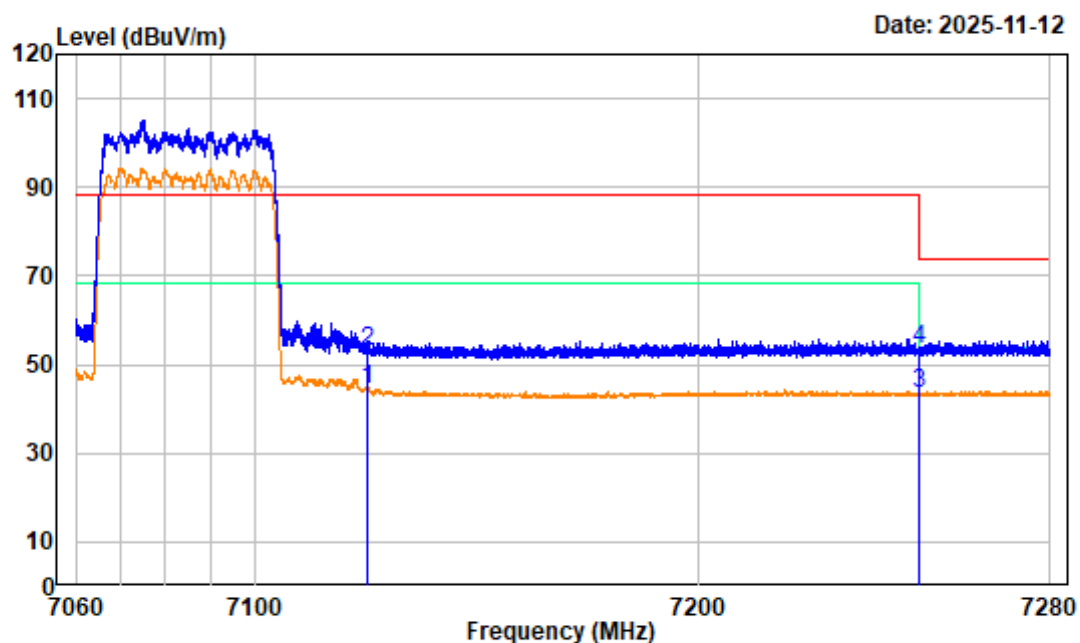

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be40 High Channel 7085MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7125.000	-1.38	45.78	44.40	68.20	-23.80	Average
2	7125.000	-1.38	54.34	52.96	88.20	-35.24	peak
3	7250.000	-1.30	44.92	43.62	54.00	-10.38	Average
4	7250.000	-1.30	54.67	53.37	74.00	-20.63	peak

802.11be80 High Channel Bandedge_HORIZONTAL

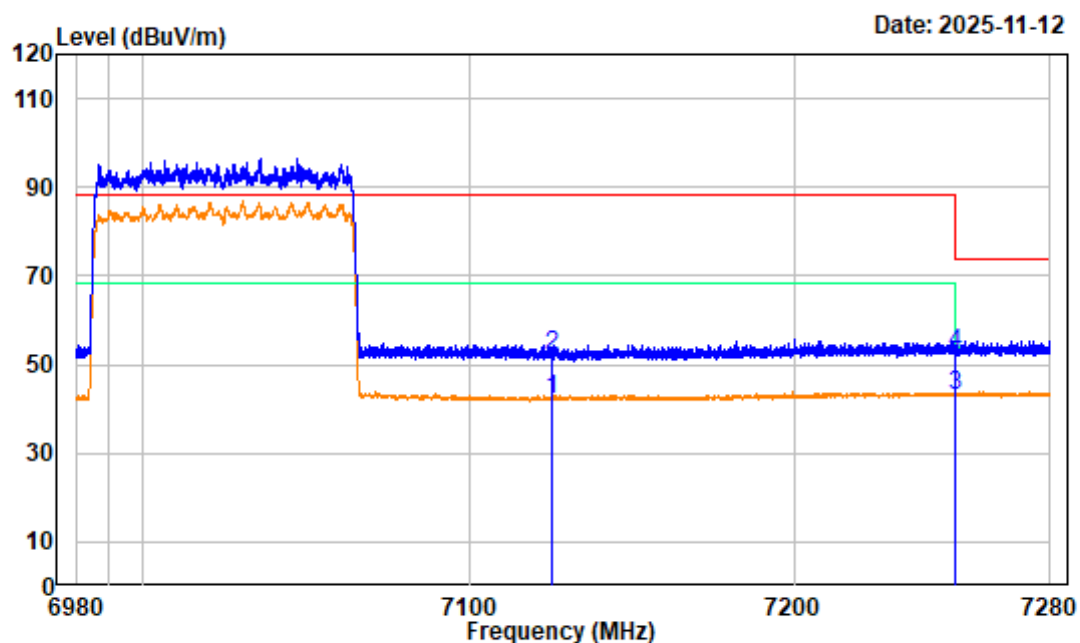

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504Z00193E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : 802.11be80 High Channel 7025MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7125.000	-1.38	43.44	42.06	68.20	-26.14	Average
2	7125.000	-1.38	53.36	51.98	88.20	-36.22	peak
3	7250.000	-1.30	44.41	43.11	54.00	-10.89	Average
4	7250.000	-1.30	54.02	52.72	74.00	-21.28	peak

802.11be80 High Channel Bandedge_VERTICAL

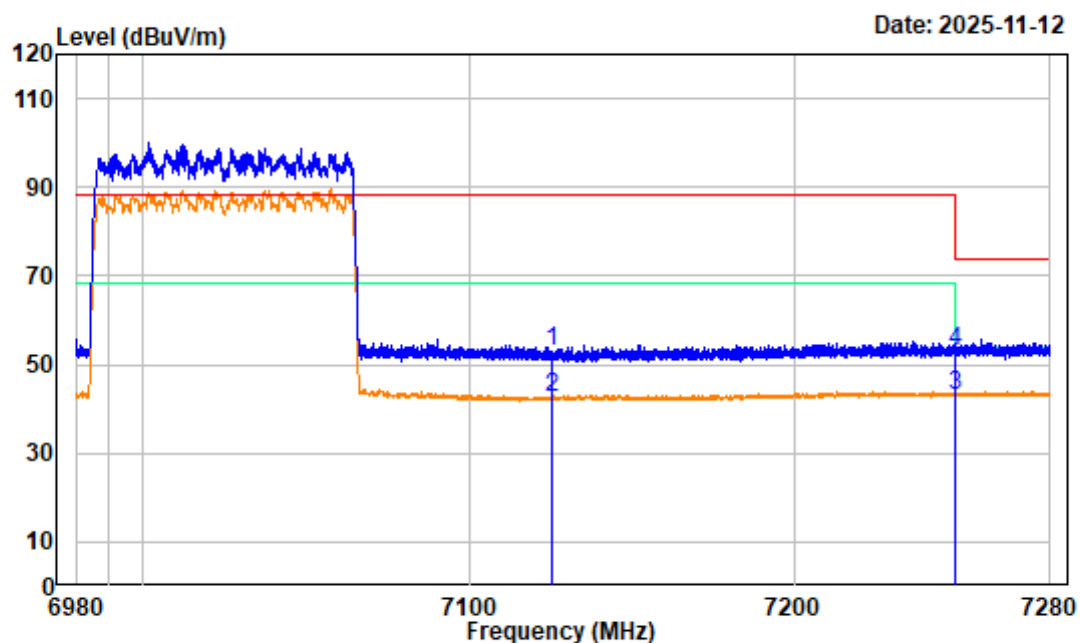

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504Z00193E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : 802.11be80 High Channel 7025MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7125.000	-1.38	54.48	53.10	68.20	-15.10	Average
2	7125.000	-1.38	43.98	42.60	88.20	-45.60	peak
3	7250.000	-1.30	44.26	42.96	54.00	-11.04	Average
4	7250.000	-1.30	54.46	53.16	74.00	-20.84	peak


802.11be160 High Channel Bandedge_HORIZONTAL

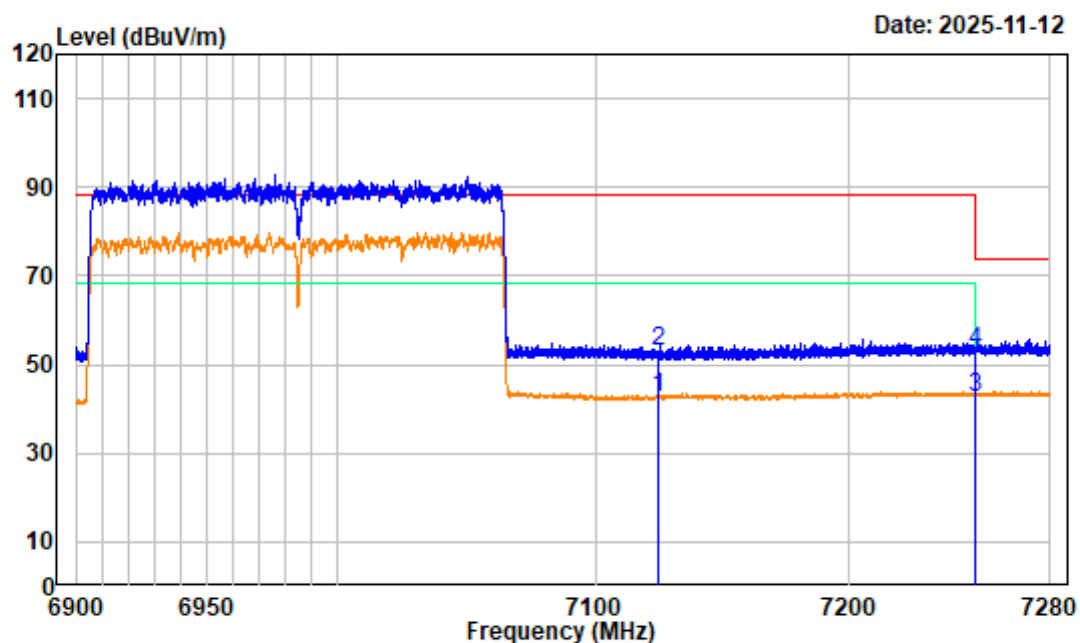

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 High Channel 6985MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7125.000	-1.38	43.83	42.45	68.20	-25.75	Average
2	7125.000	-1.38	54.30	52.92	88.20	-35.28	peak
3	7250.000	-1.30	44.03	42.73	54.00	-11.27	Average
4	7250.000	-1.30	54.14	52.84	74.00	-21.16	peak


802.11be160 High Channel Bandedge_VERTICAL

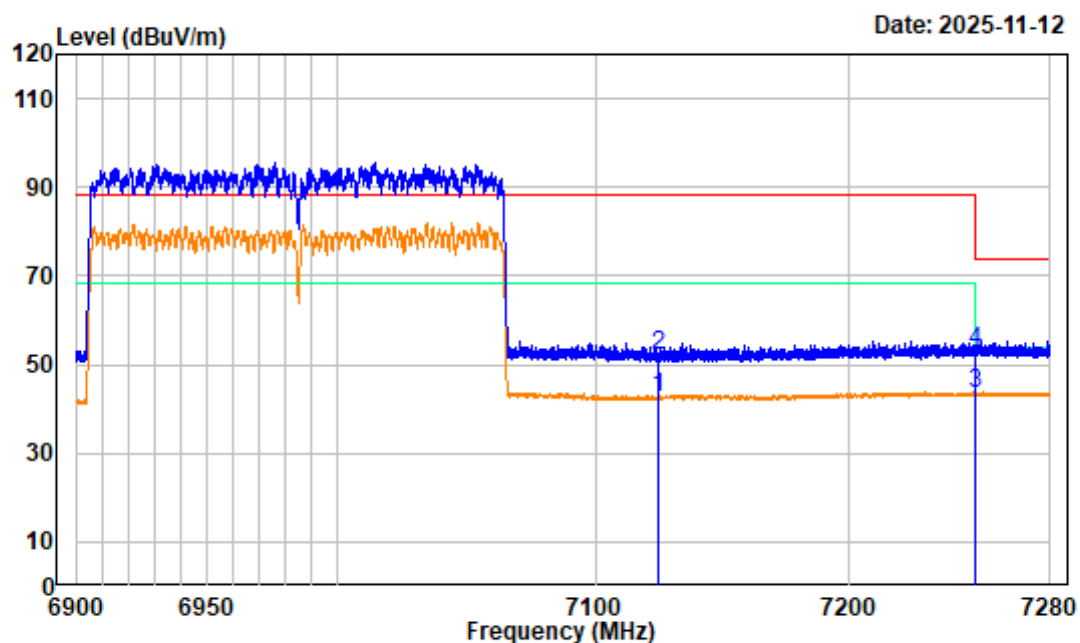

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504Z00193E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11be160 High Channel 6985MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7125.000	-1.38	43.82	42.44	68.20	-25.76	Average
2	7125.000	-1.38	53.41	52.03	88.20	-36.17	peak
3	7250.000	-1.30	44.74	43.44	54.00	-10.56	Average
4	7250.000	-1.30	54.31	53.01	74.00	-20.99	peak

802.11be320 High Channel Bandedge_HORIZONTAL

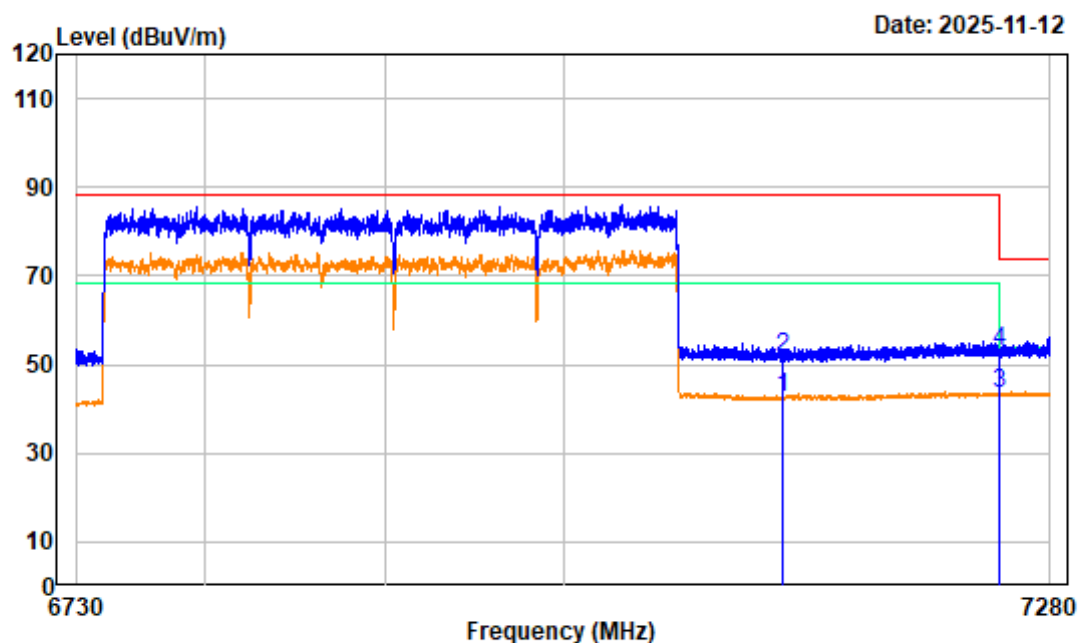

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504Z00193E-RF


Test Mode : Transmitting Tester:Kevin Lv

Note : 802.11be320 High Channel 6905MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7125.000	-1.38	44.13	42.75	68.20	-25.45	Average
2	7125.000	-1.38	53.20	51.82	88.20	-36.38	peak
3	7250.000	-1.30	44.92	43.62	54.00	-10.38	Average
4	7250.000	-1.30	54.43	53.13	74.00	-20.87	peak

802.11be320 High Channel Bandedge_VERTICAL

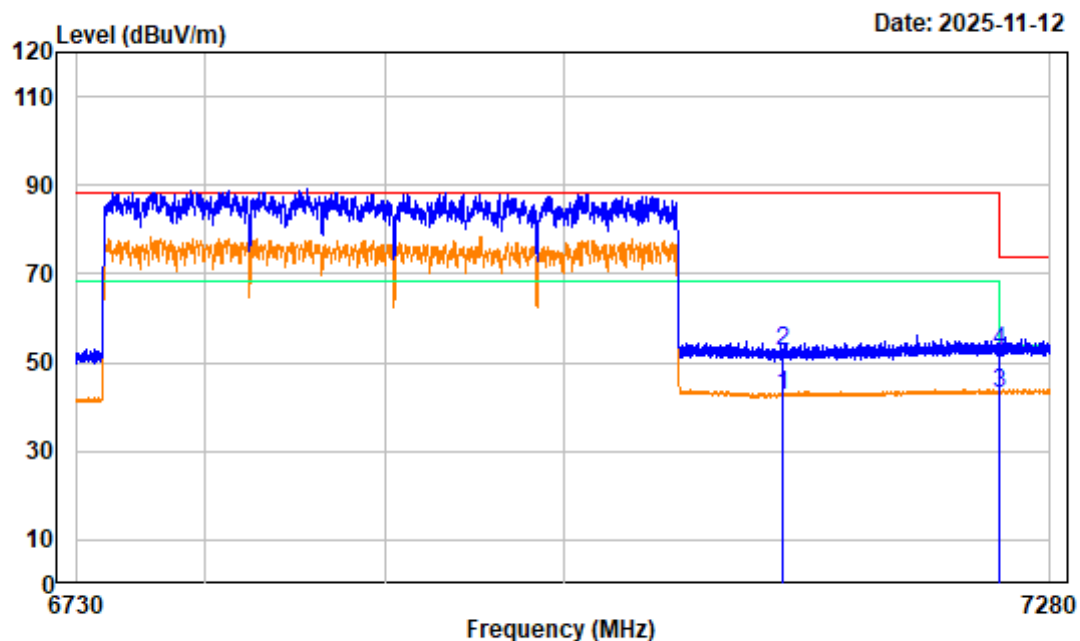

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504Z00193E-RF

Test Mode : Transmitting Tester:Kevin Lv

Note : 802.11be320 High Channel 6905MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	7125.000	-1.38	43.99	42.61	68.20	-25.59	Average
2	7125.000	-1.38	53.98	52.60	88.20	-35.60	peak
3	7250.000	-1.30	44.52	43.22	54.00	-10.78	Average
4	7250.000	-1.30	54.04	52.74	74.00	-21.26	peak

***** END *****