

Acknowledgment

SPECIFICATION FOR APPROVEAL

CUSTOMER: ZLGD-A1-0302

PART NO. : ZLGD-Y17×39-130-FR

DESCRIPTION: coil+hard ferrite sheet

SPECIFICATION: 17x39,0.08×24P×2P, from ferrite sheet130mm

DATE: 20240326

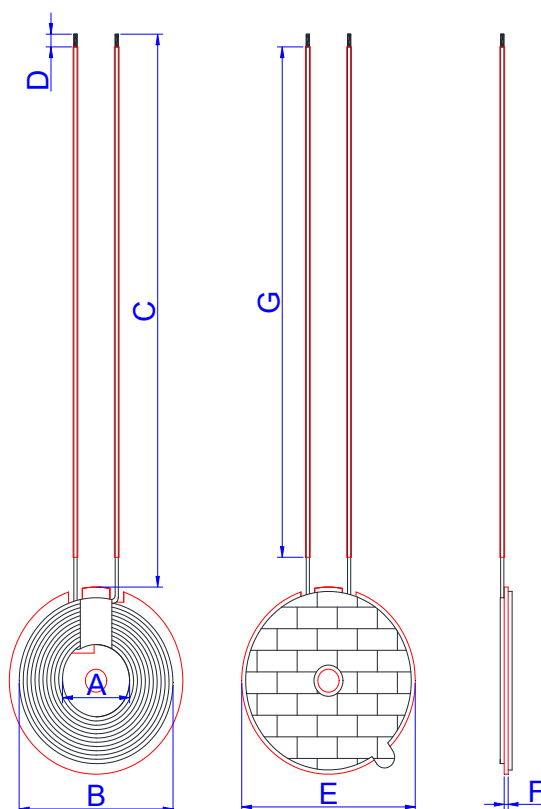
TRX APPROVAL		
Production	Audit	Recognition date
Xiaoxian Zeng	Zhihui Qiu	20240326
CUSTOMER APPROVAL		
Project	Approved	Recognition date
Result: ☐ Qualified ☐ Disqualified ☐ Other		

Dongguan city DFL Electronic Technology Co.,LTD

107 Xinfeng West Road, Shijie, Dongguan, Guangdong,

TEL: 0769-86016320 FAX: 0769-86372427

Dongguan city DFL Electronic Technology Co.,LTD

SPECIFICATION						
DESC :	ZLGD-Y17×39-130-FR		version Rev:A	Customer:	ZLGD-A1-0302	
				Description:	coil+hard ferrite sheet	
				Date:	20240326	
1、 DIMENSION:(mm) 					A	17.0±1.0
					B	39.0±1.5
					C	130.0±4.0
					D	3.0±2.0
					E	44.0±1.0
					F	0.8±0.2
					G	120.0±4.0
					H	
					I	
					J	
					K	
					L	
					M	
					N	
					O	
					P	
					Note:	
					2. Wrap 8MM high-temperature tape around the coil outlet position.	
					3. Double-sided tape for ears attached to the back of the ferrite sheet	
					4. Two leads and 1.5 CB * 120mm tube	
					5. The coil cannot be loosened	
2、 schematic diagram:						
3、 WindingSpecification:						
NO.	TERMINAL		WIRE	Turns	Winding Direction	
1			0.08×24P×2P Hot Stranded wire	11TS	Counterclockwise	
4、 ELECTRICAL CHARACTERISTICS:						
TEMPERATURE:25±10°C,RELATIVE HUMIDITY:65±20%						
NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS	
1	IND.		6.8UH ± 0.3 with hard ferrite added	100KHz/1.0V	SHDA 1062	
2	IND.					
3	Q value					
4	DCR					
PREPARED BY/DATE			CHECKED BY/DATE		CUSTOMER/DATE	