




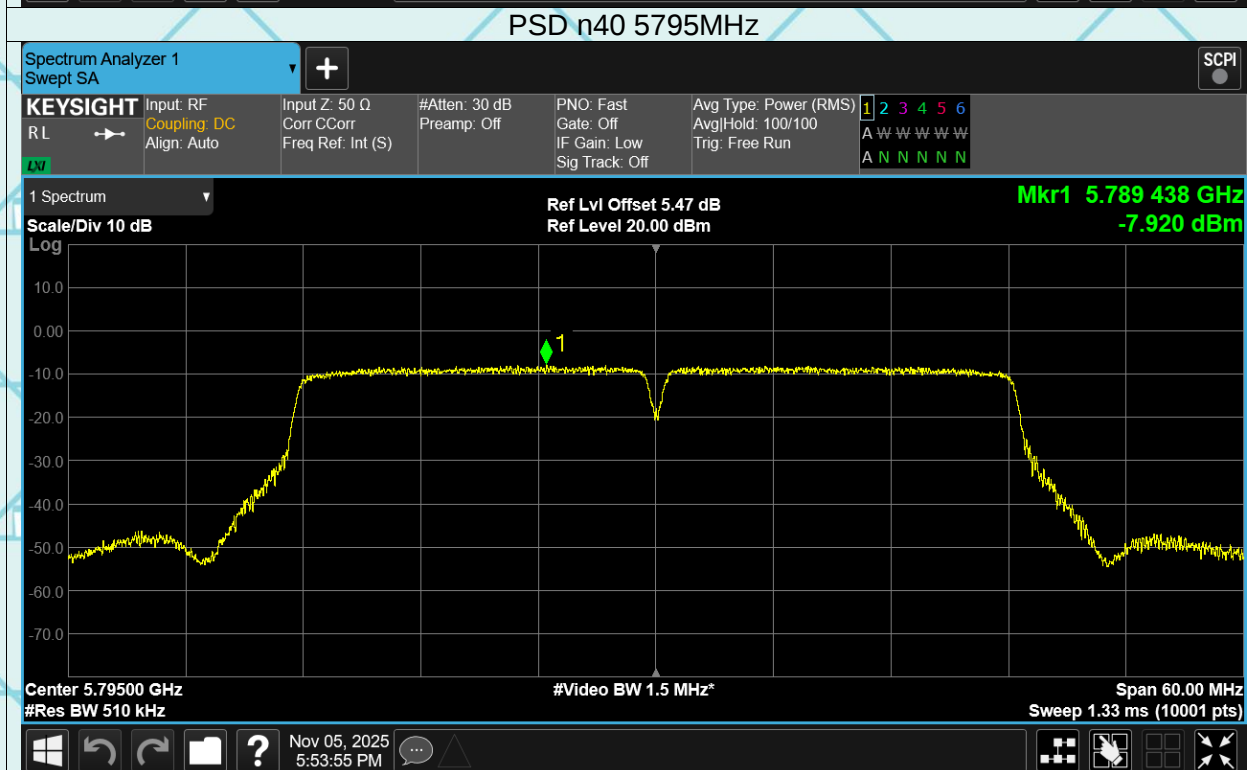
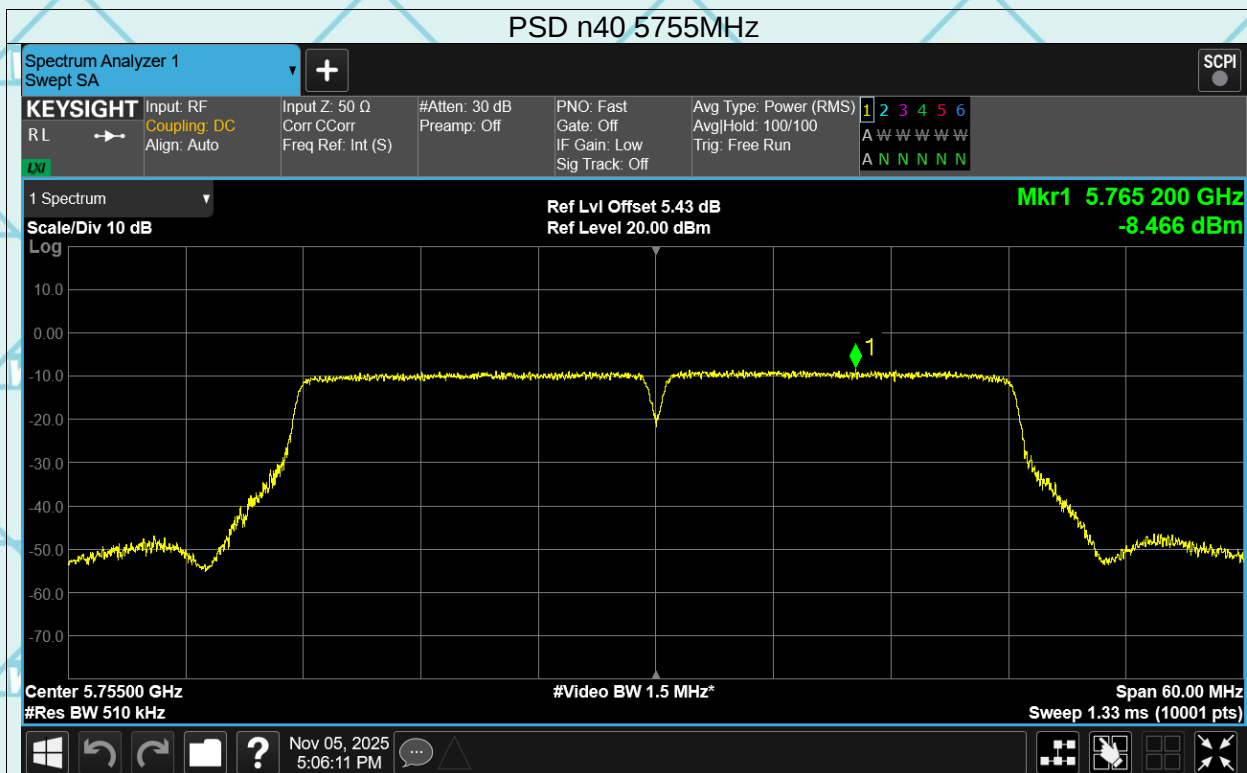
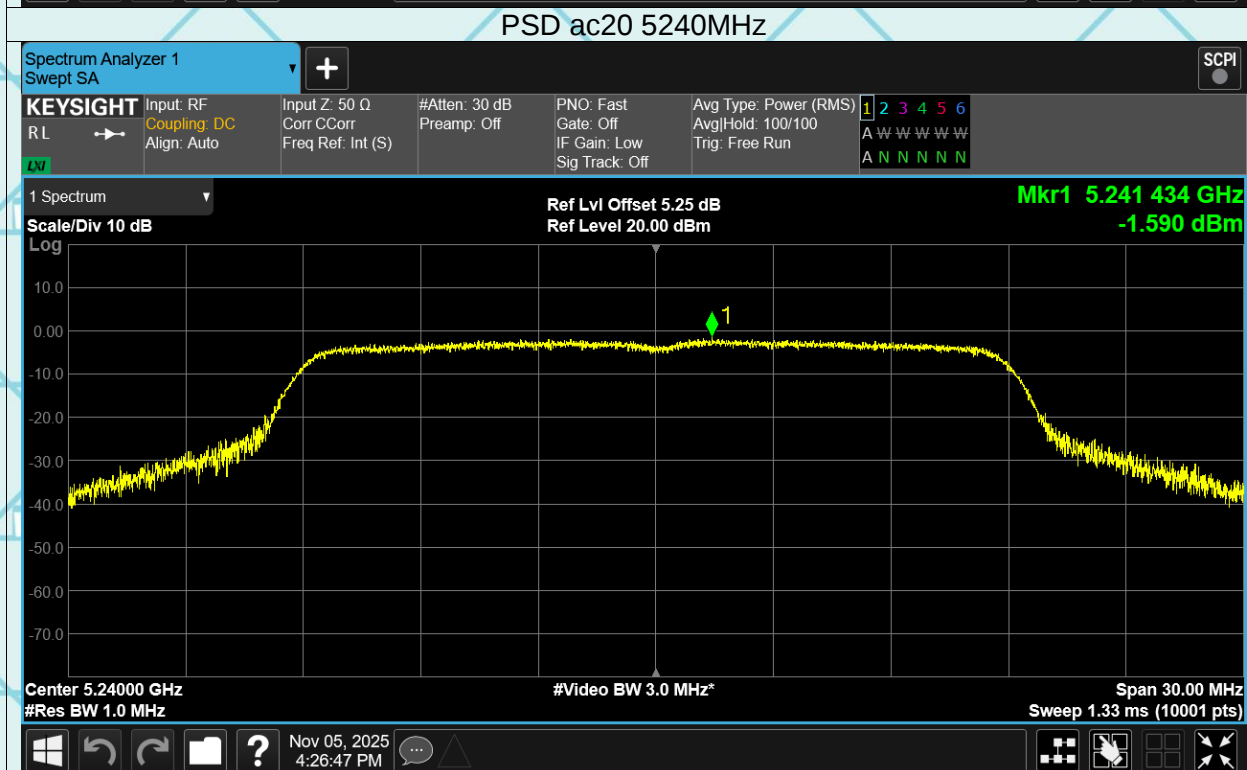
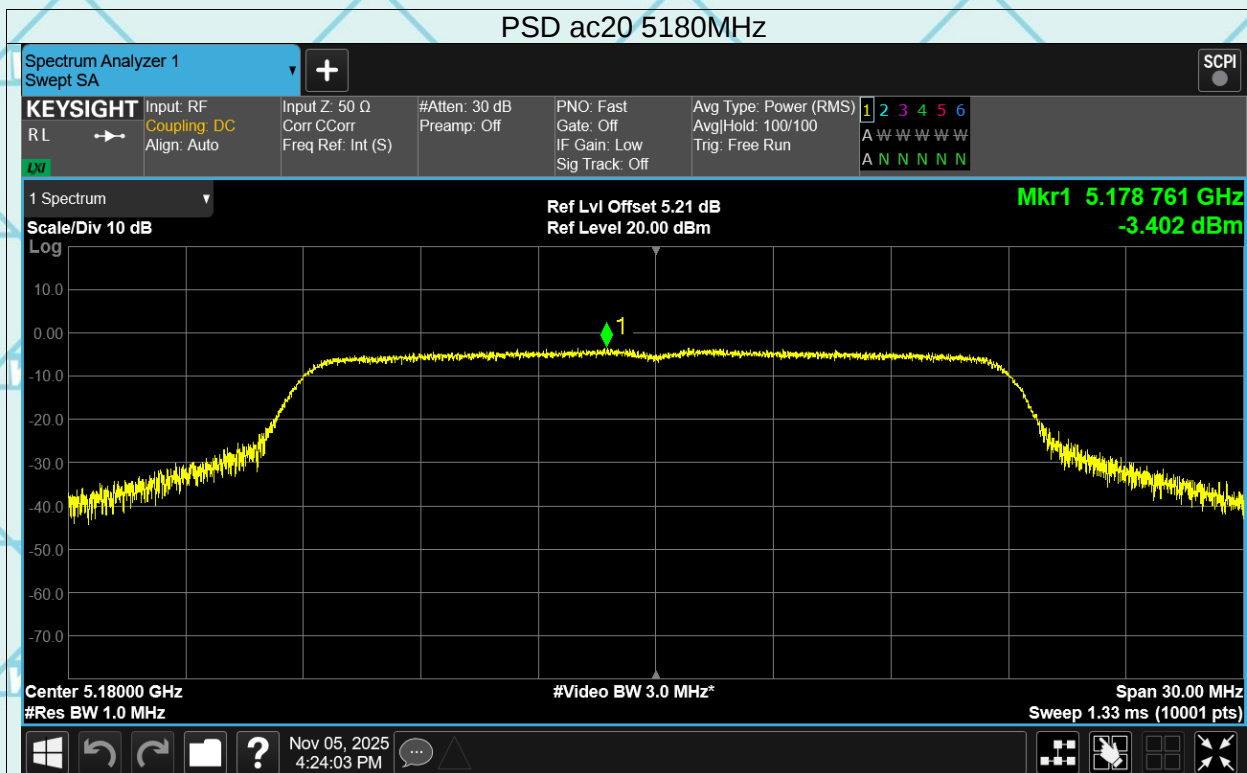
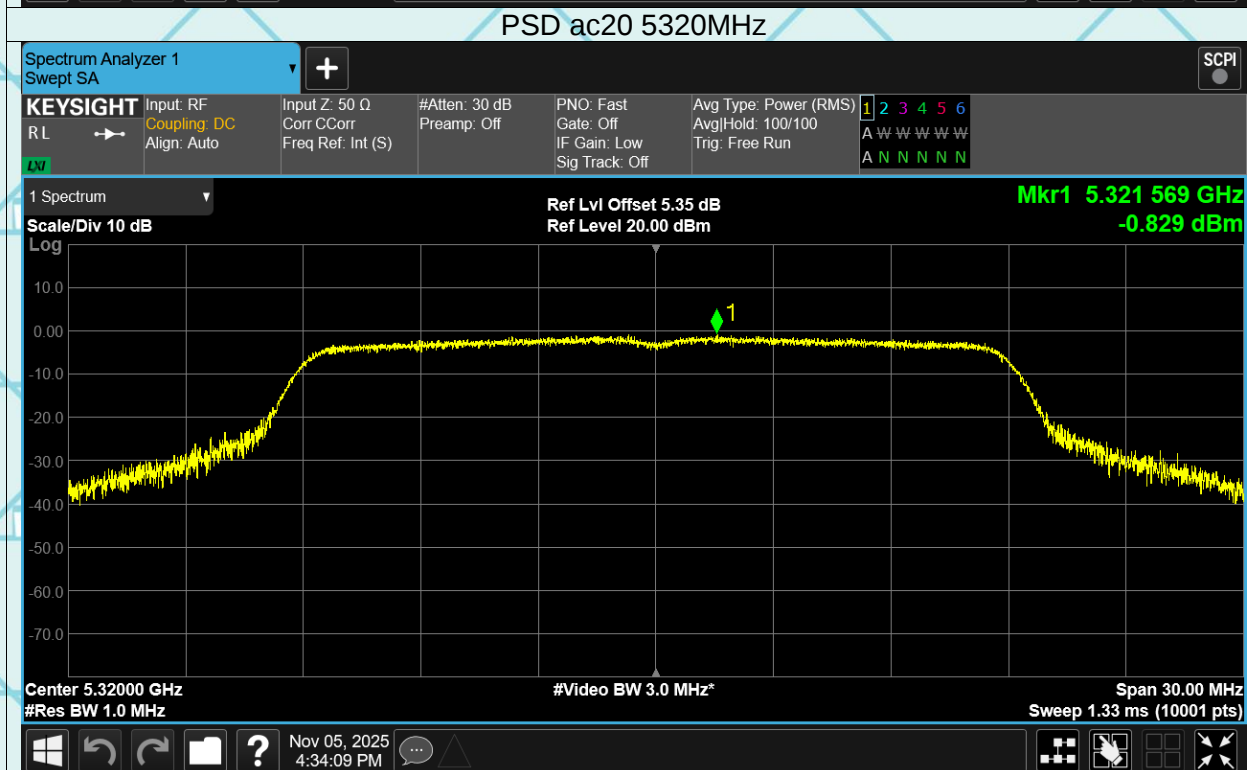



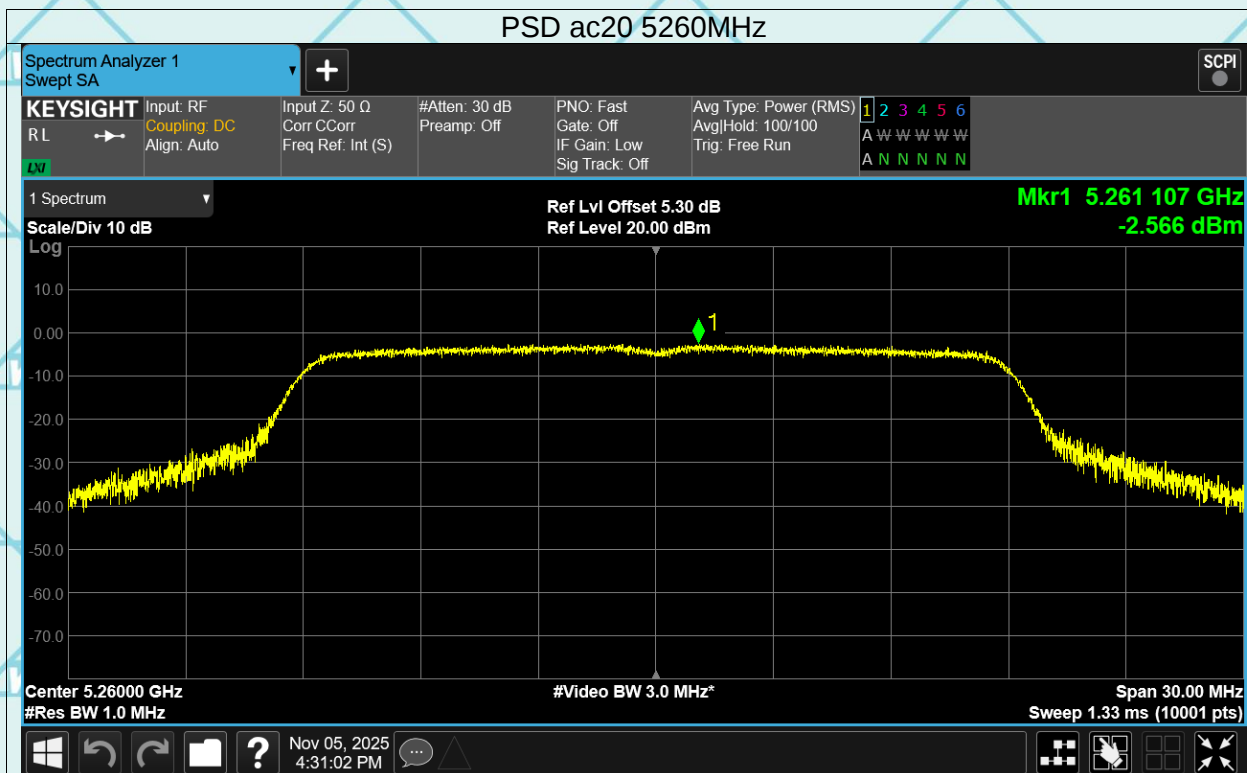



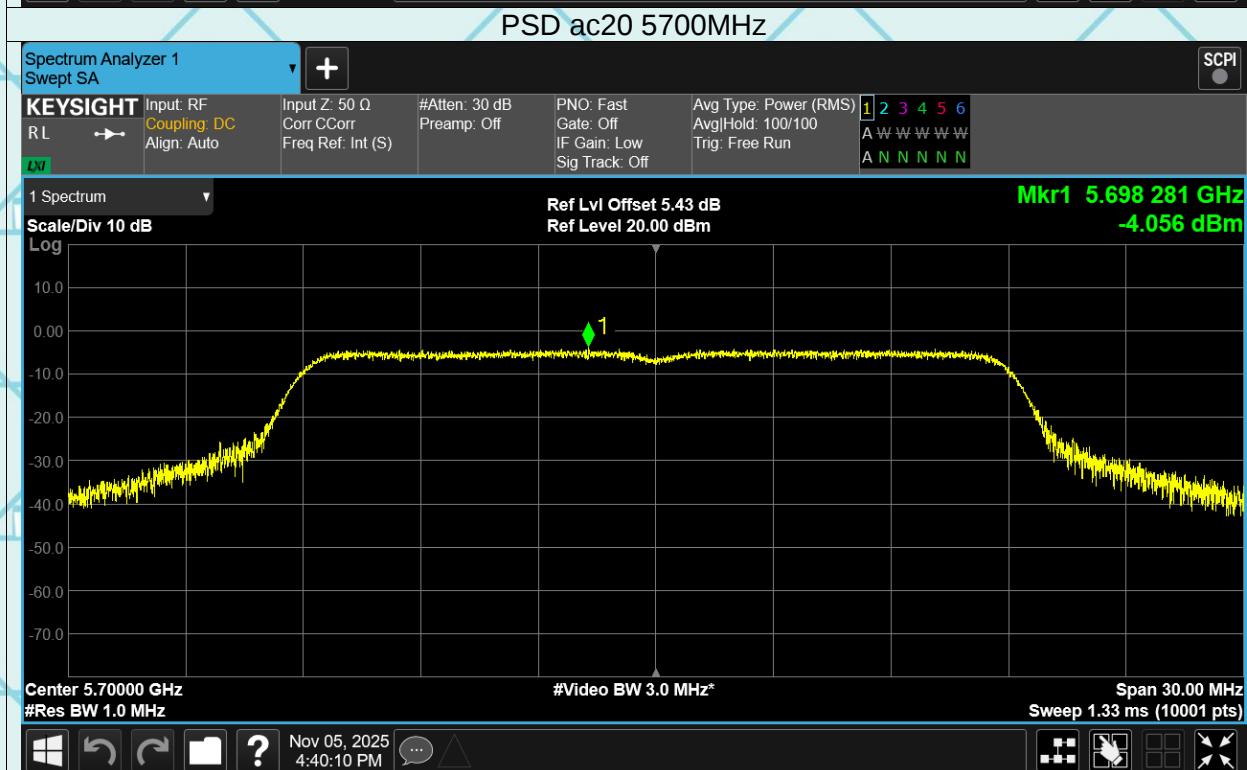



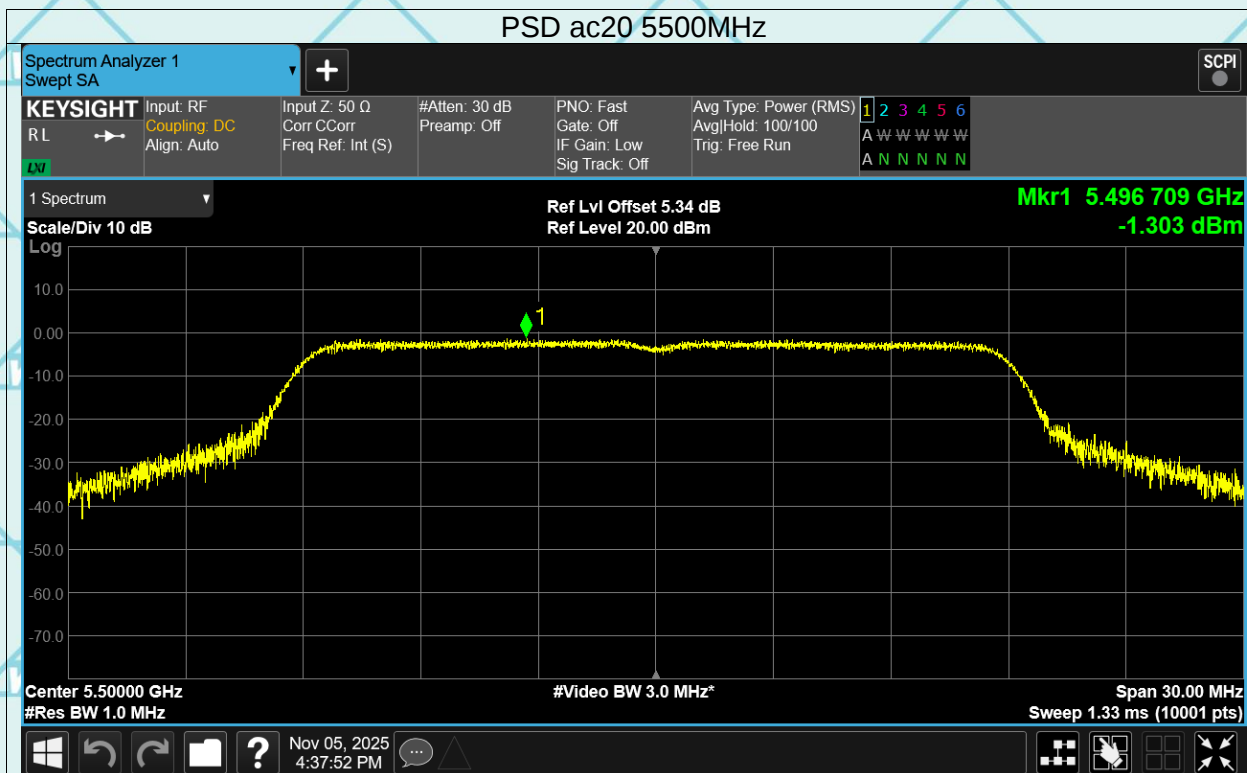



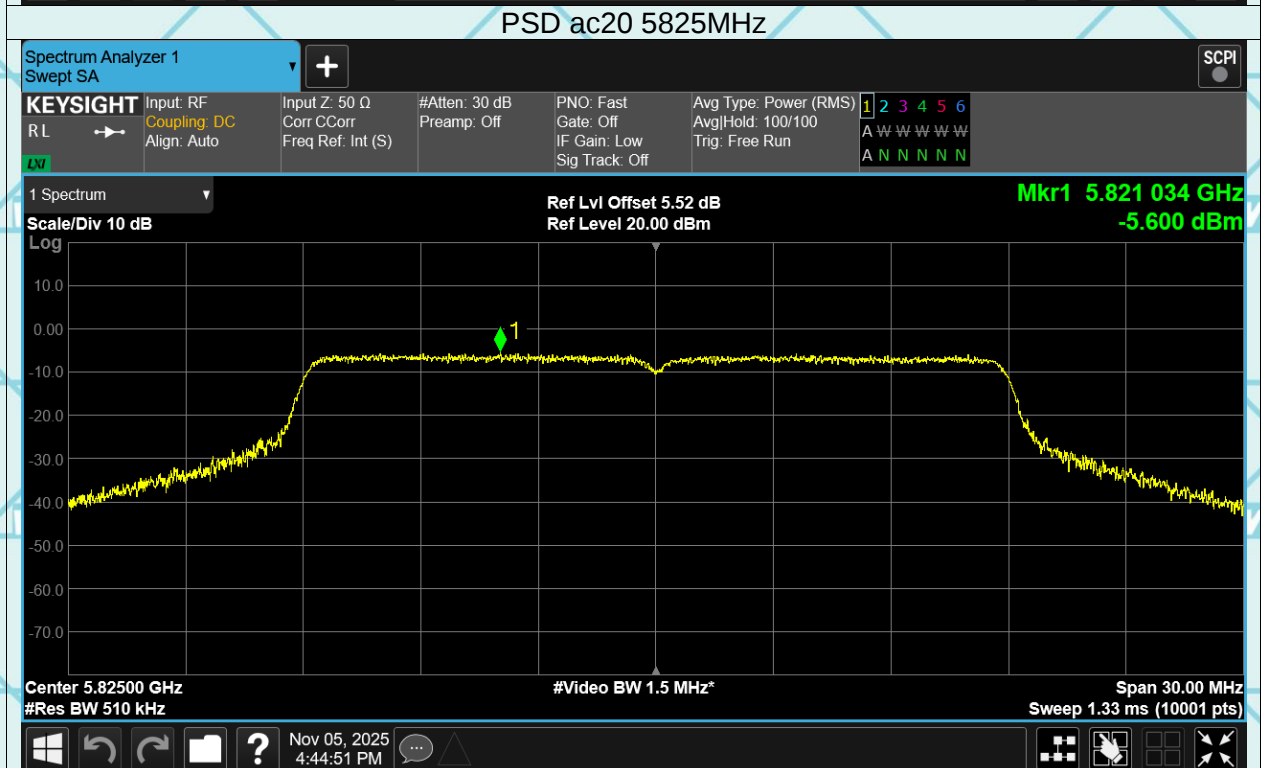



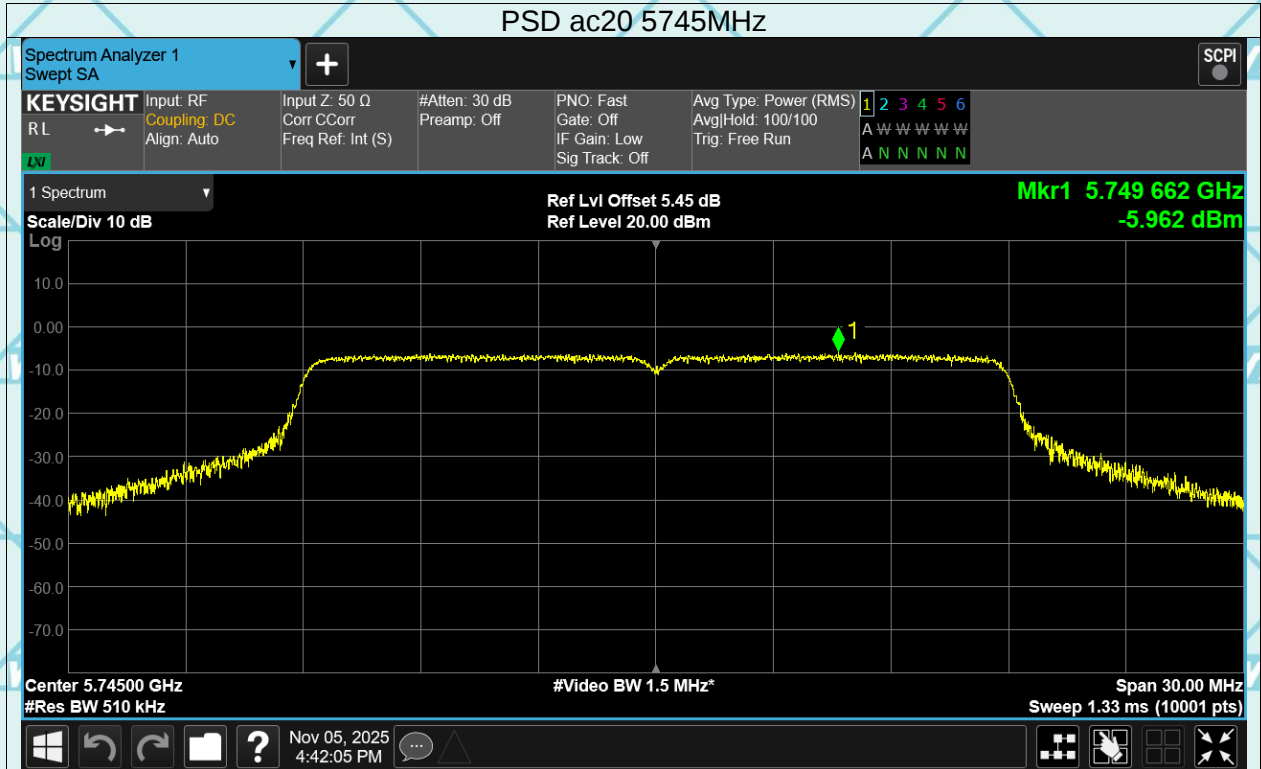


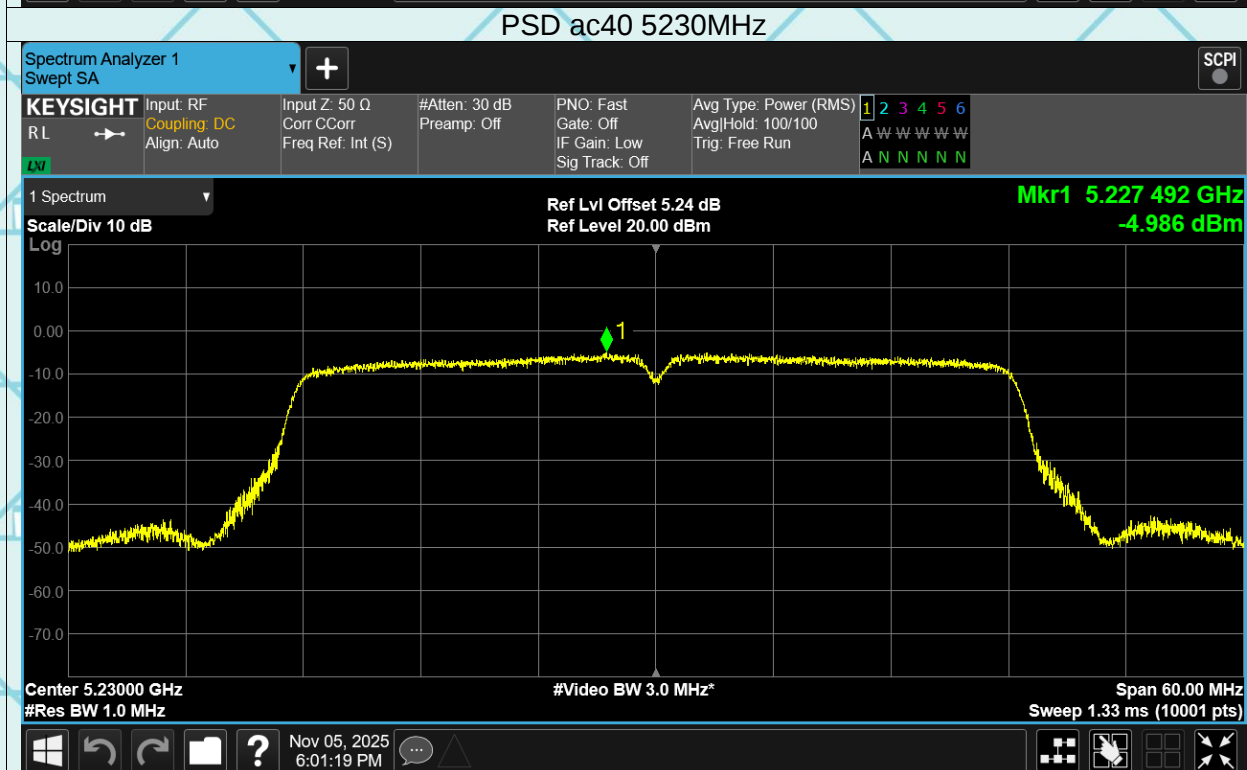
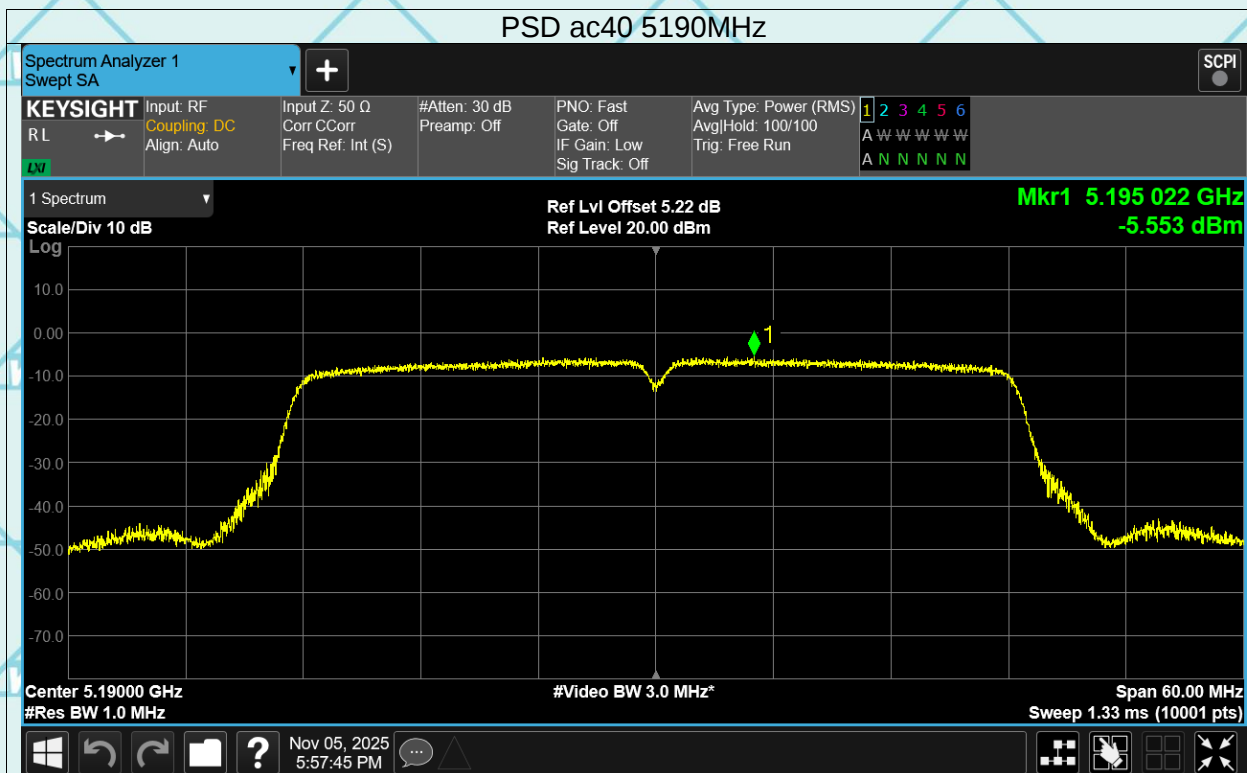


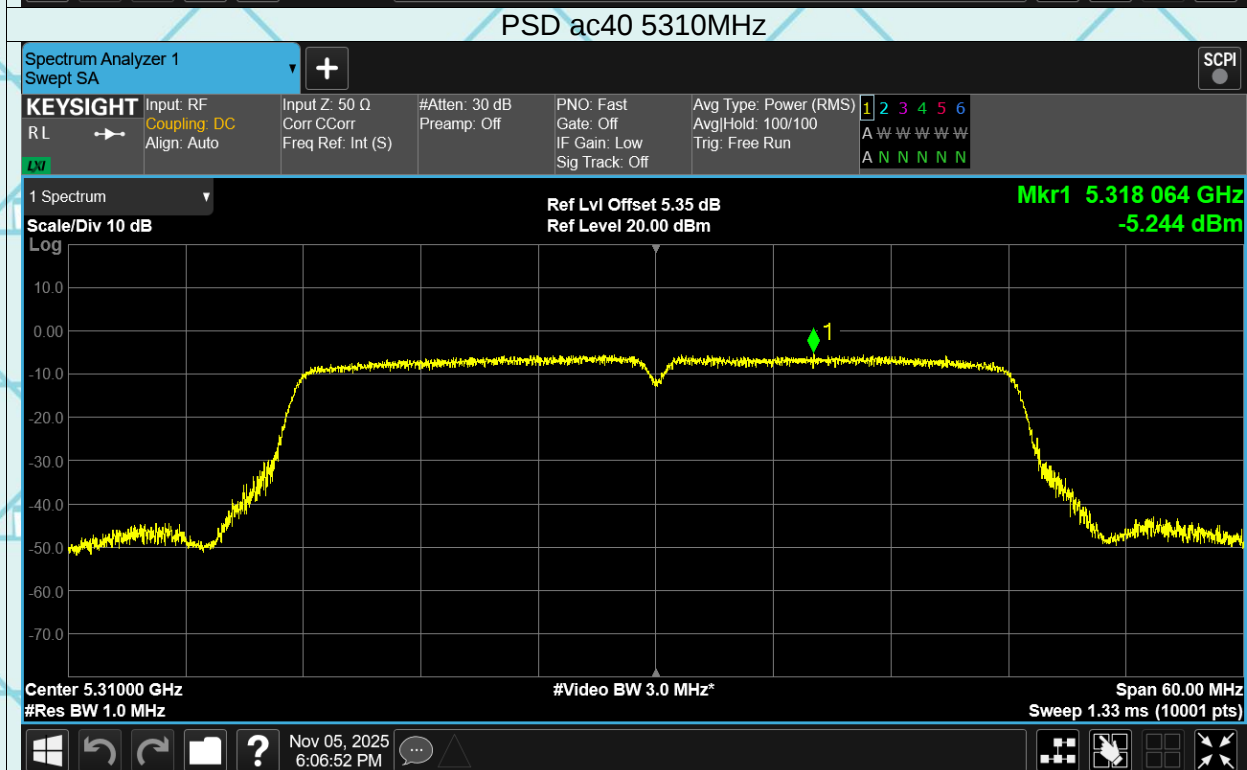
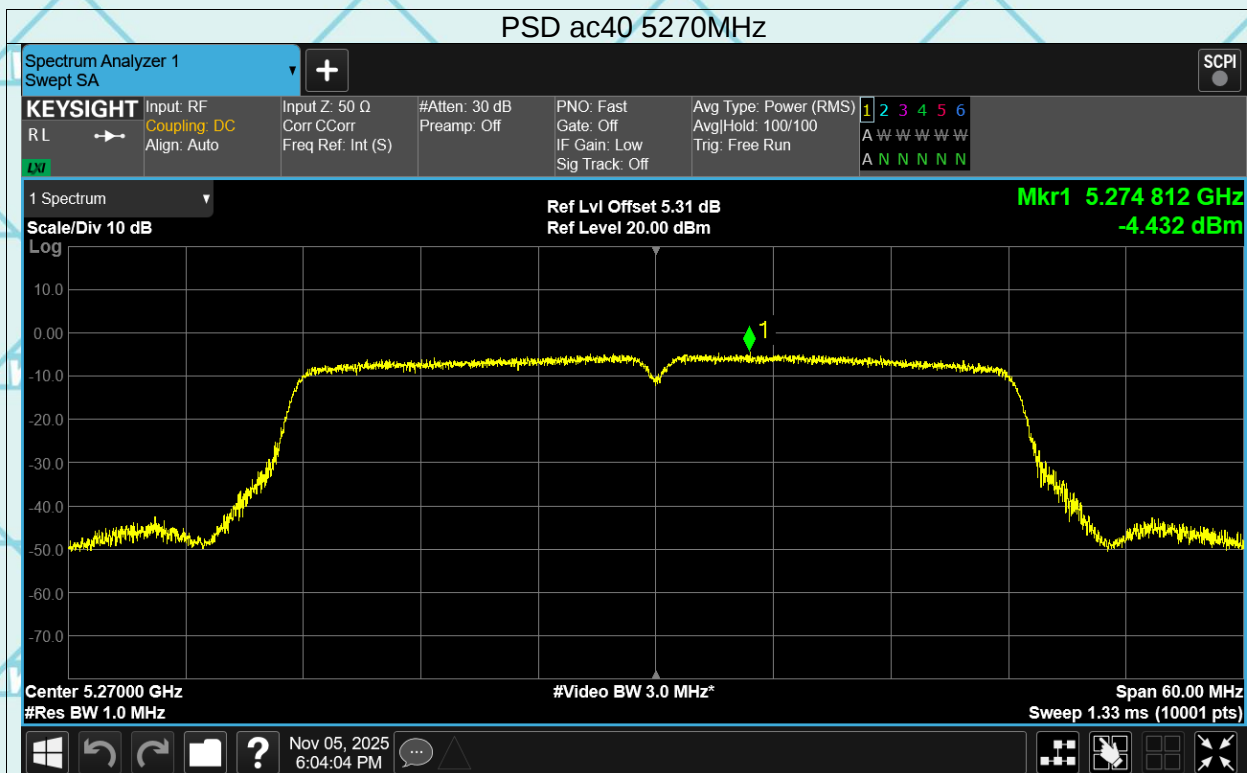


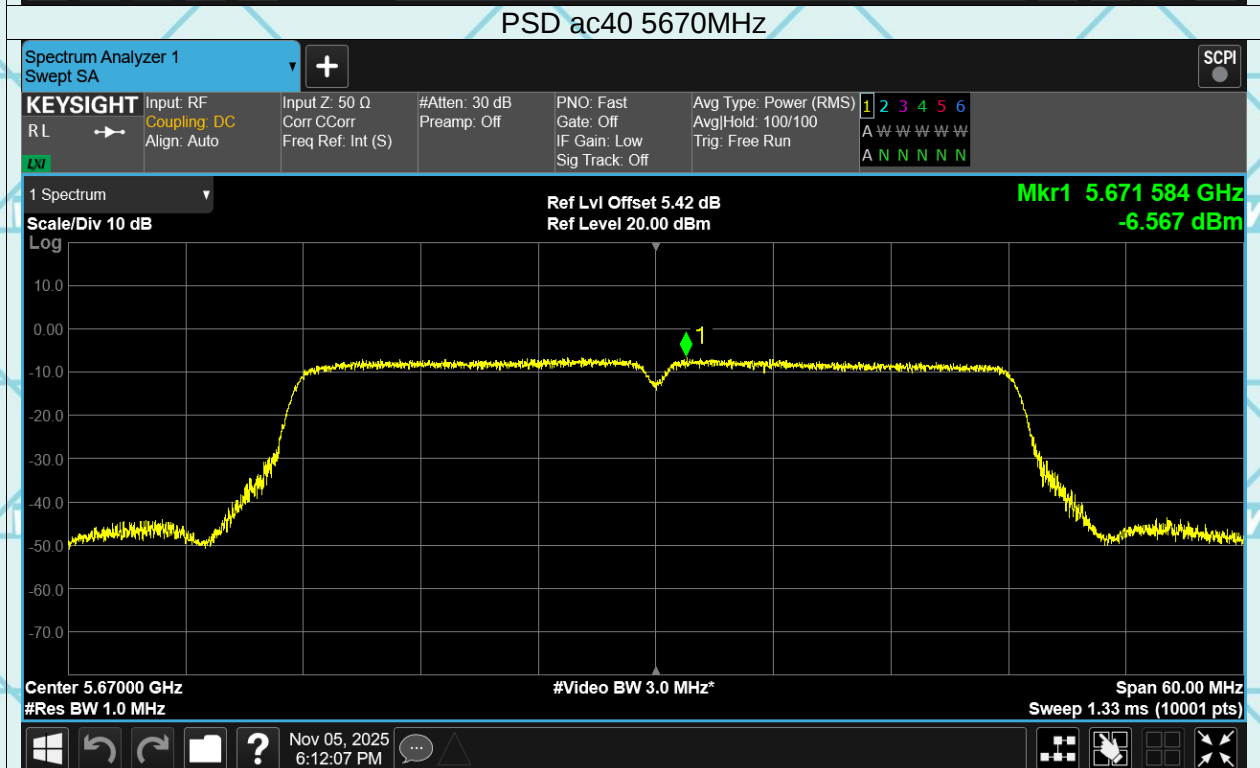
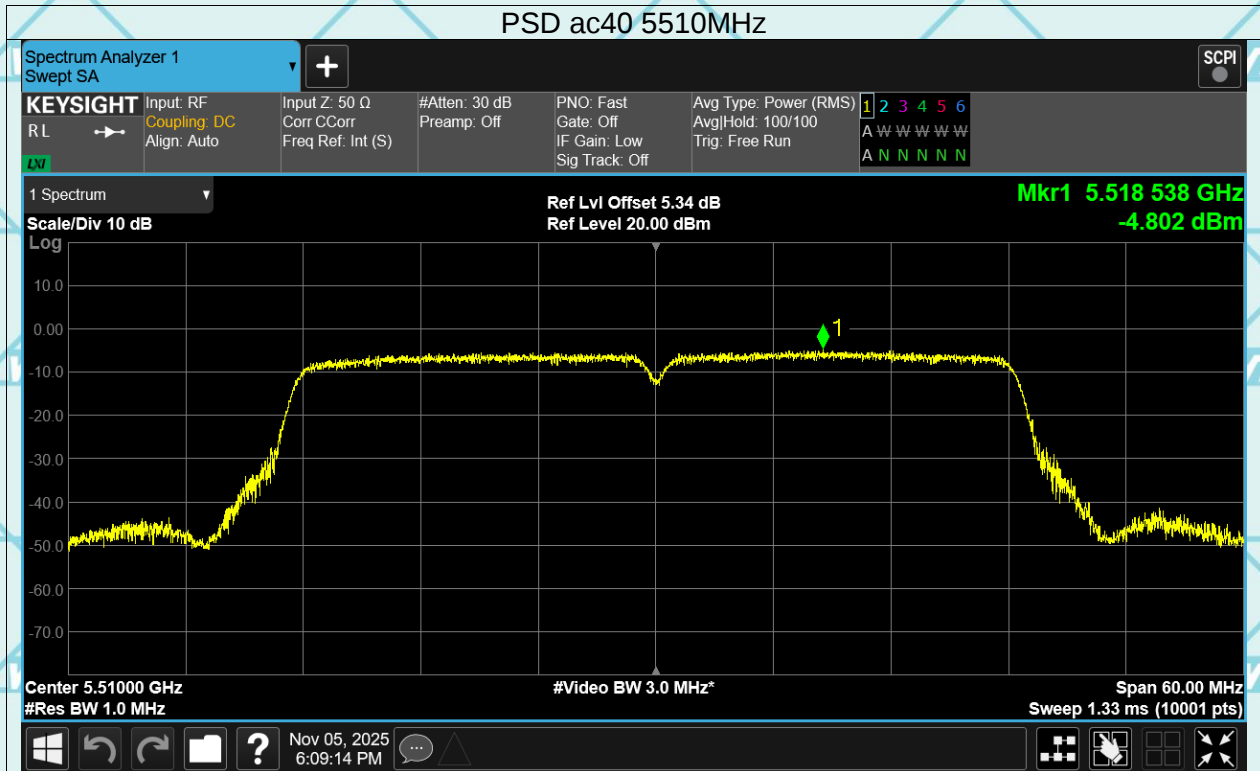


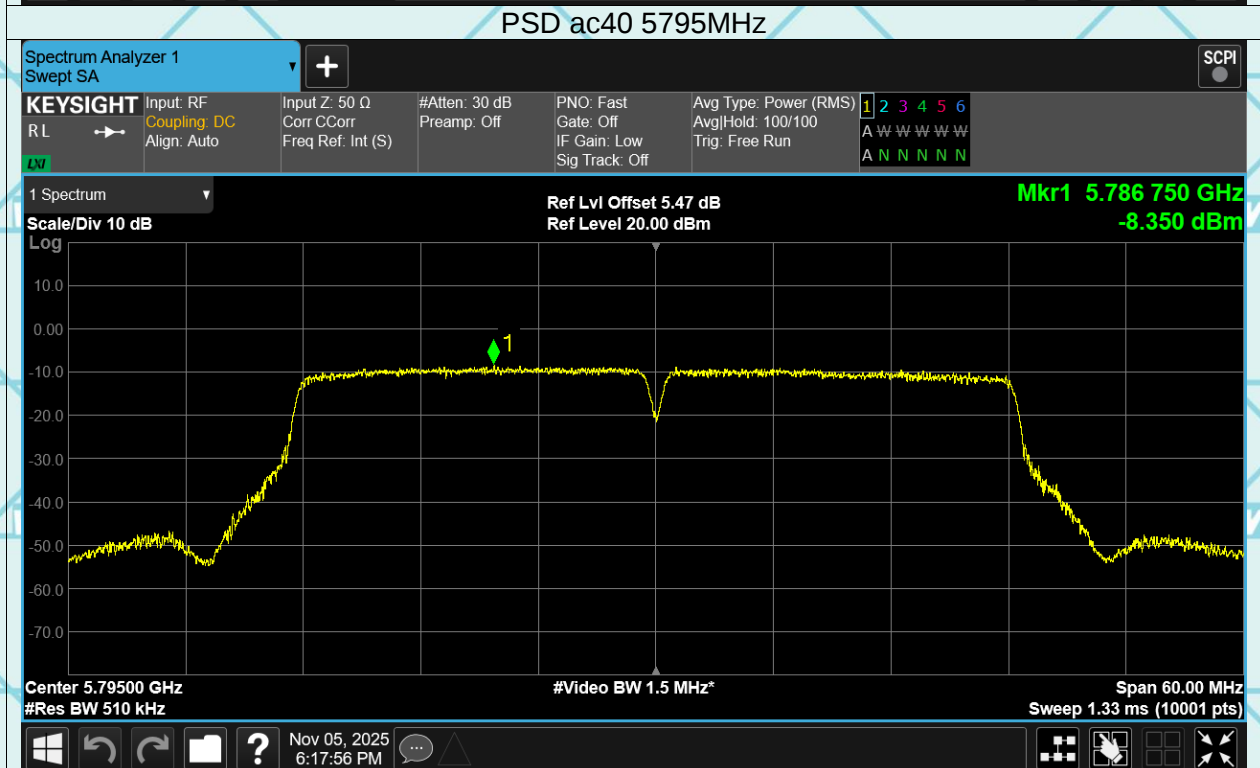
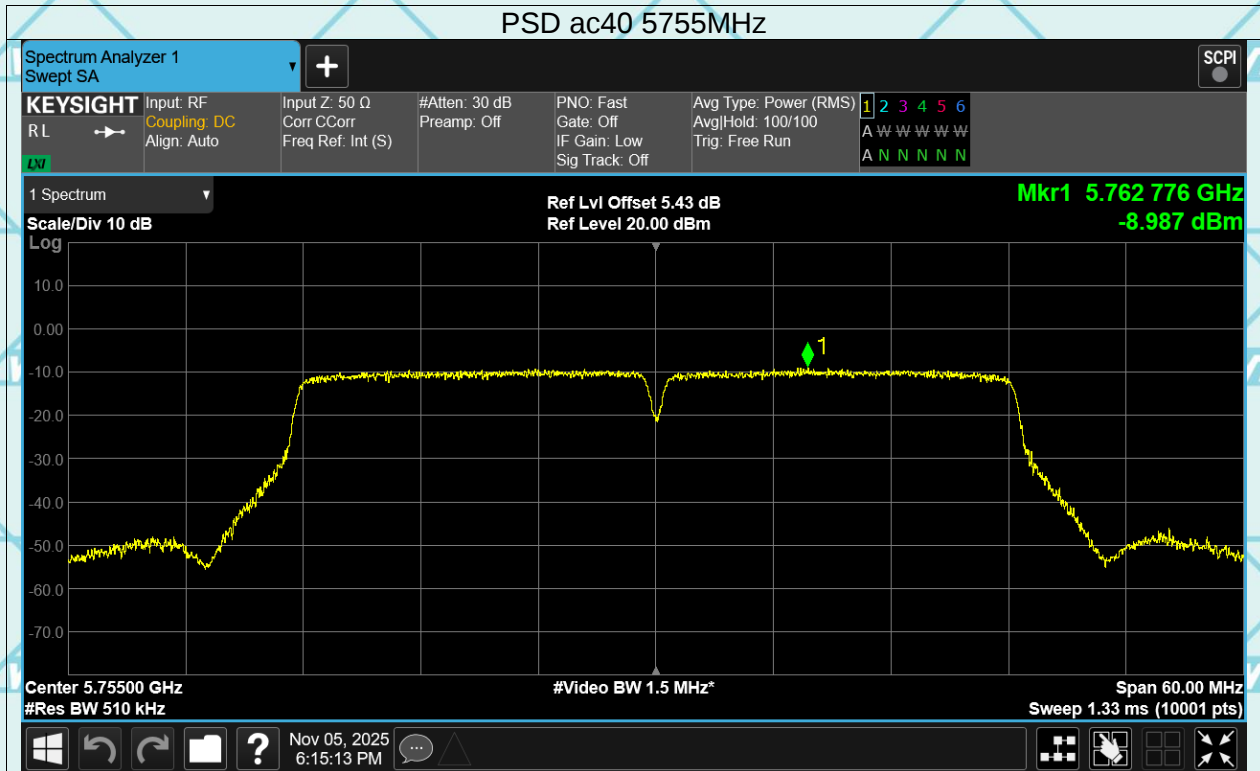


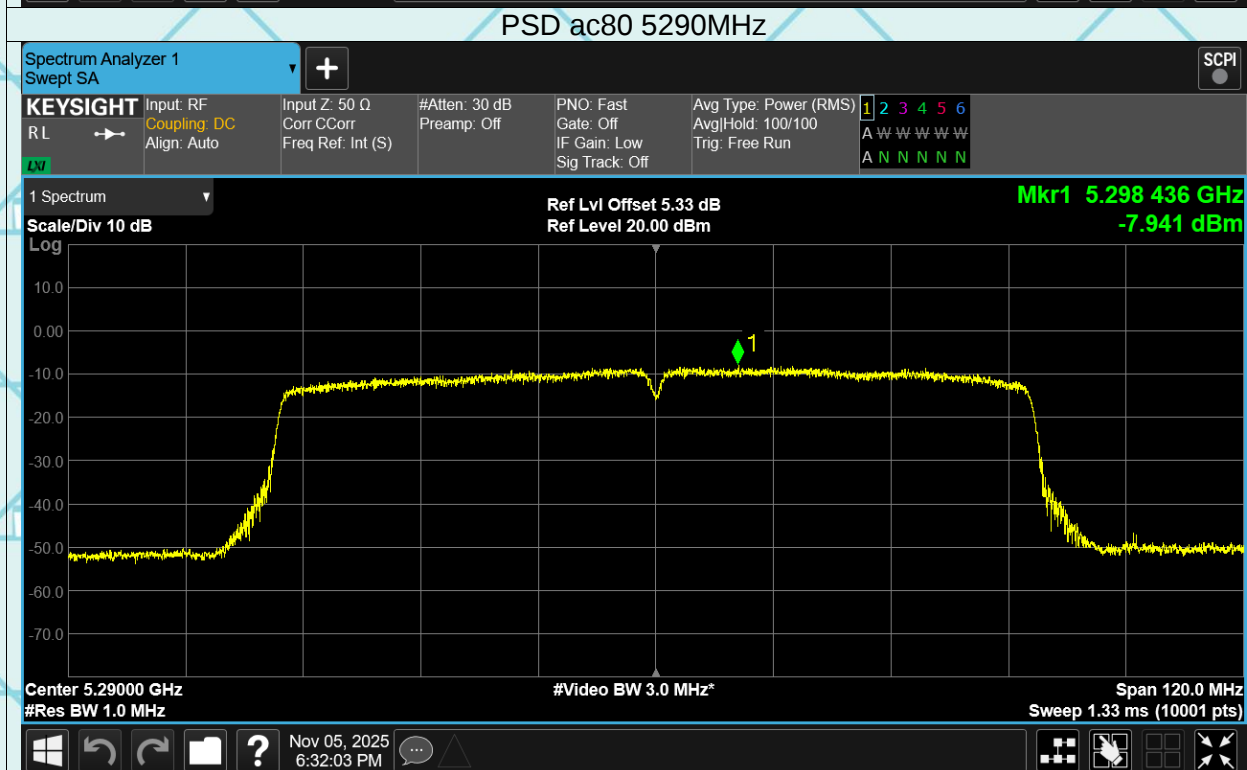
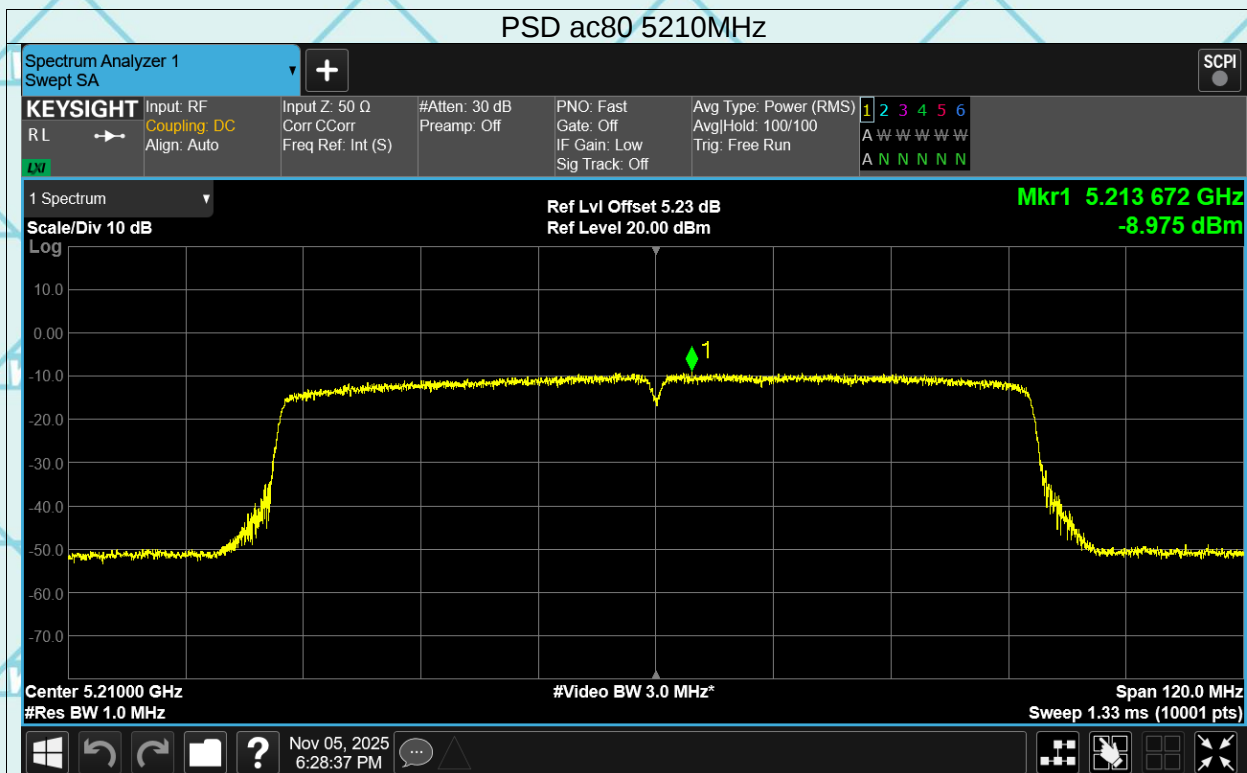


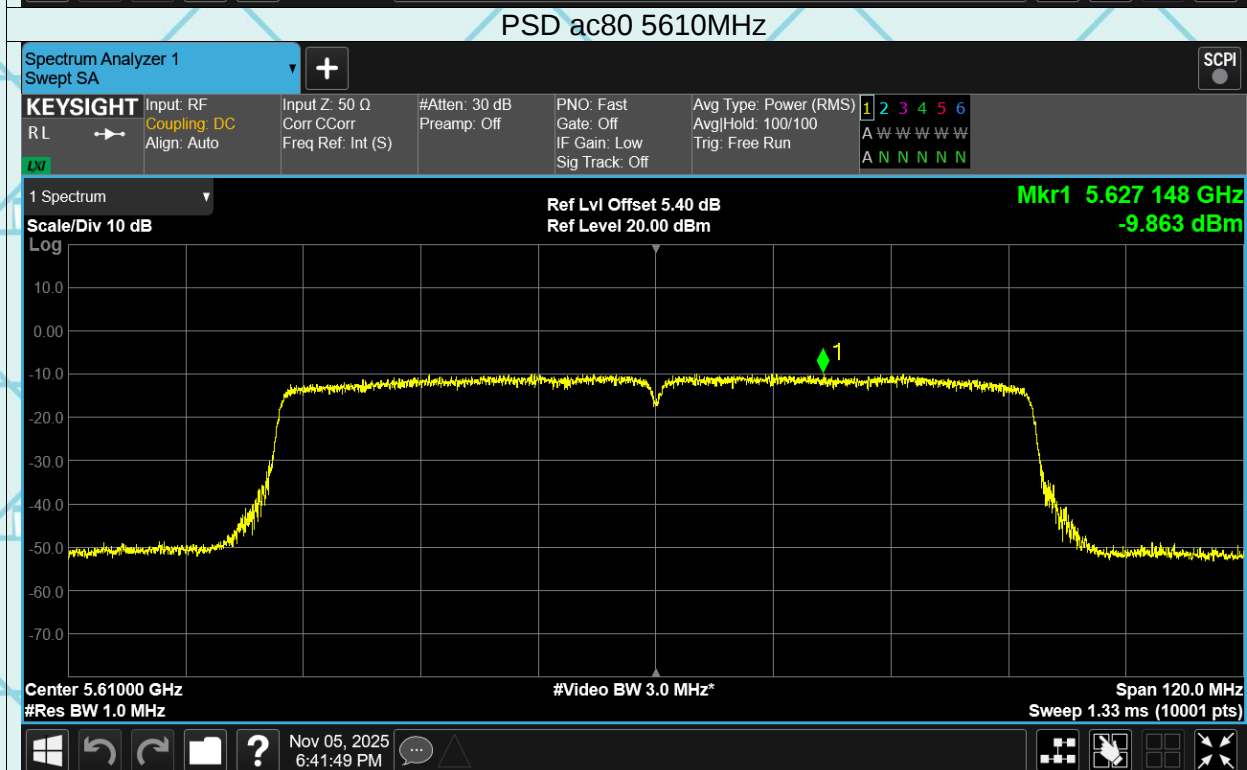
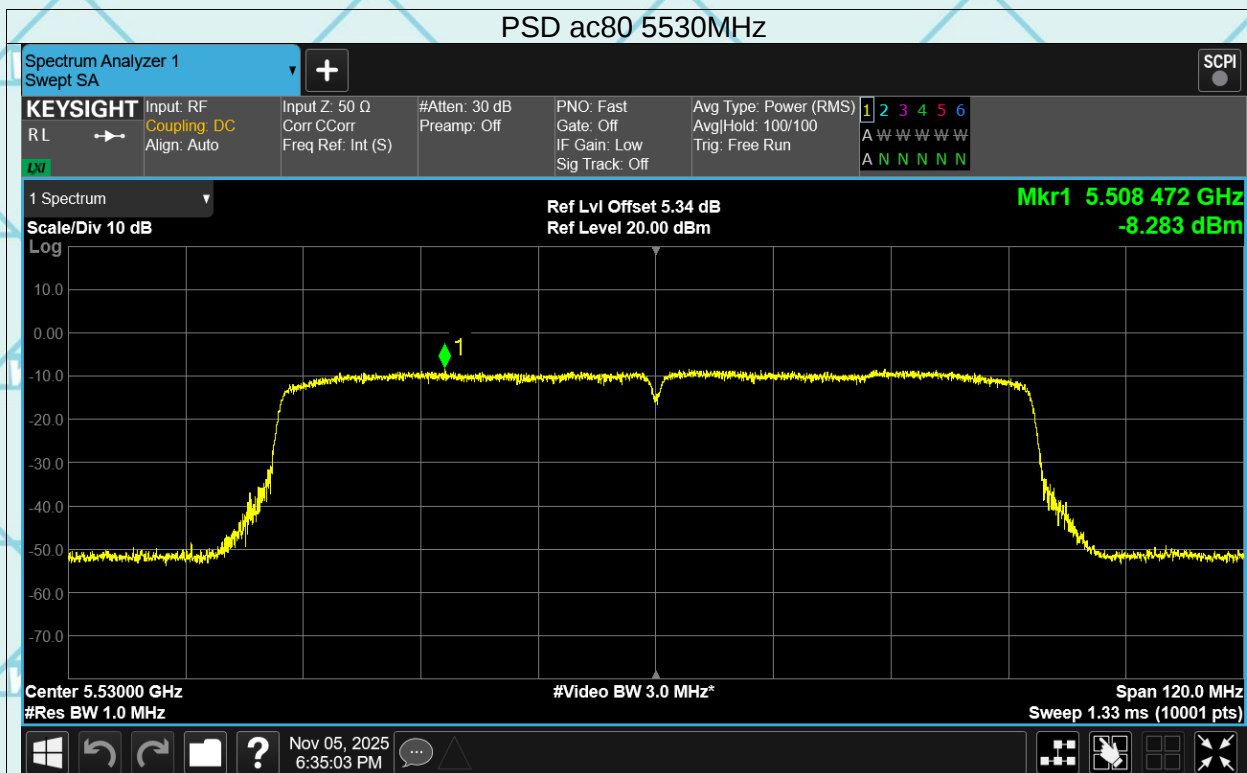


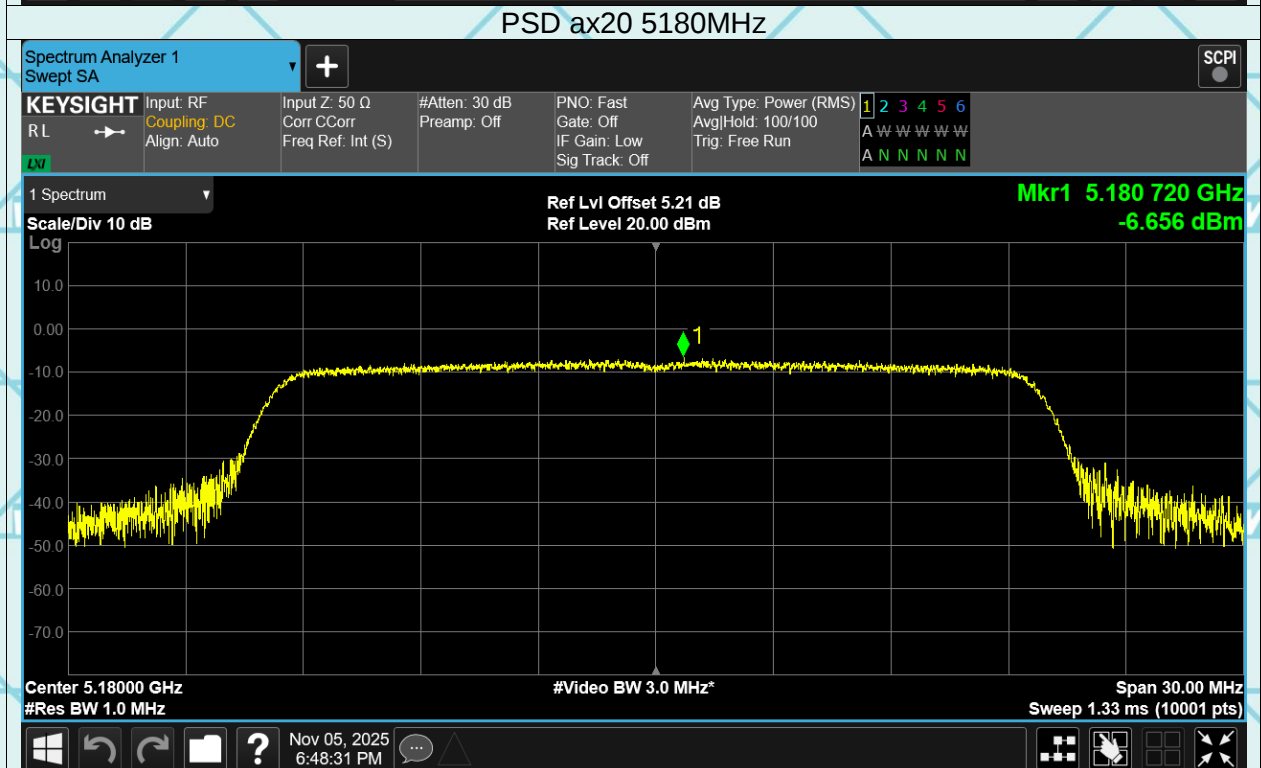
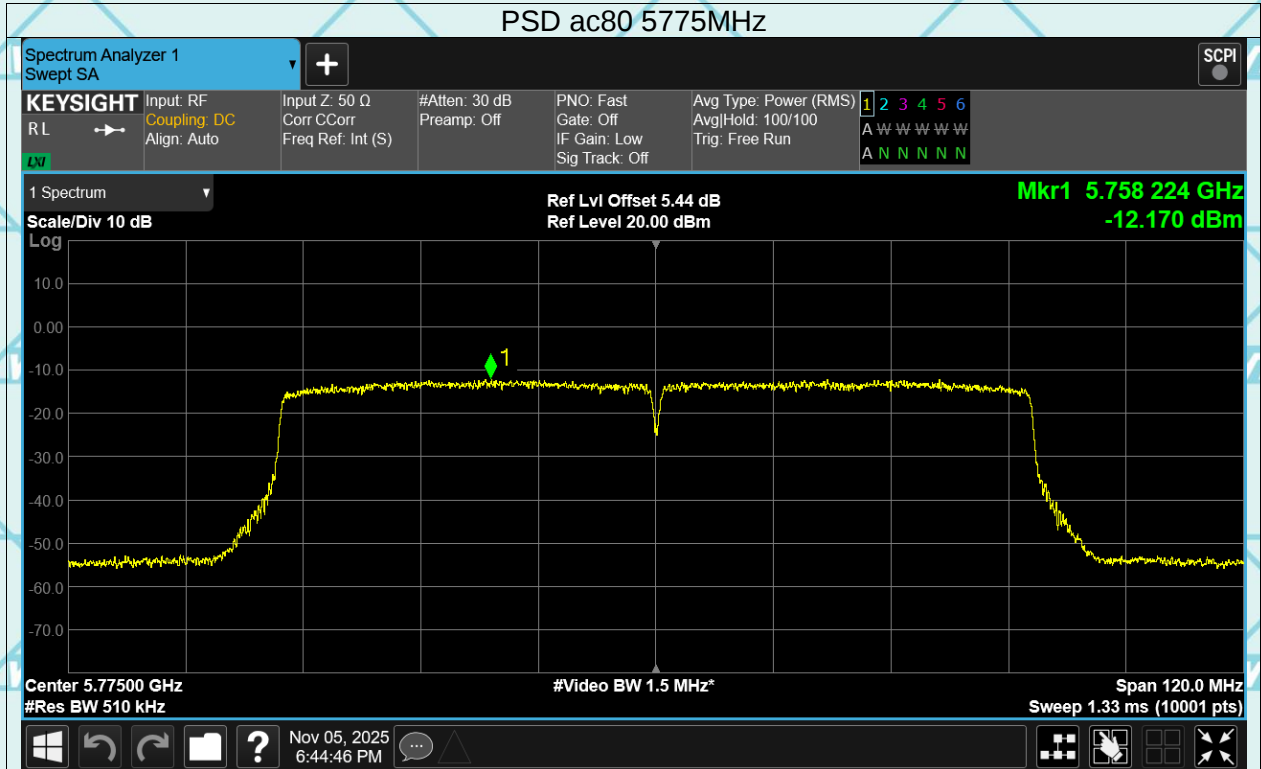


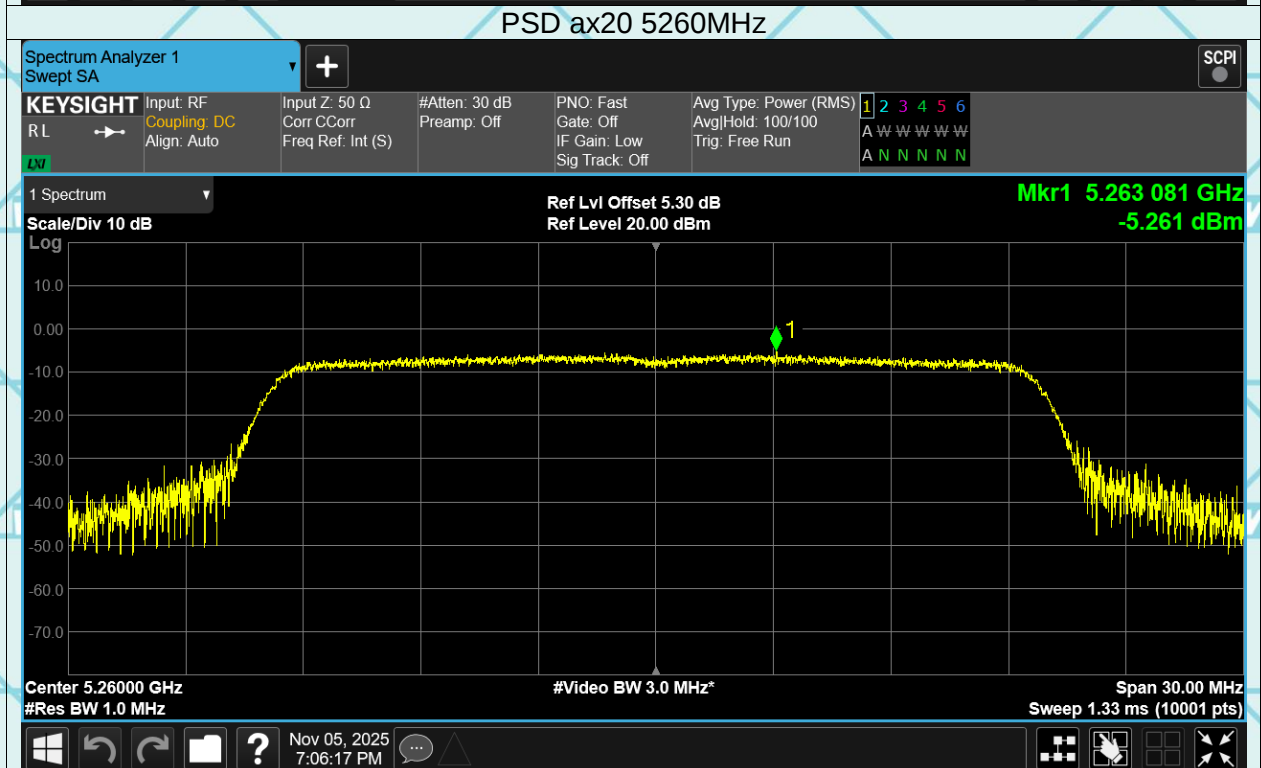
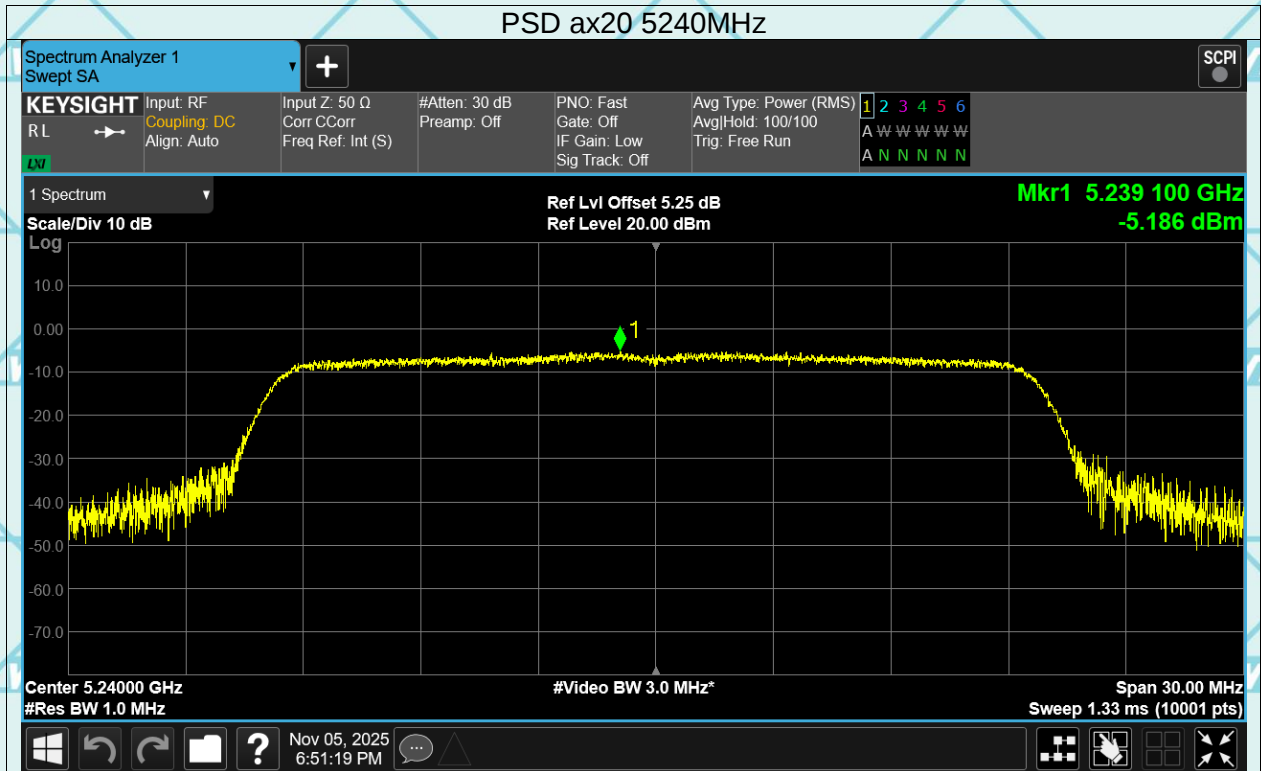


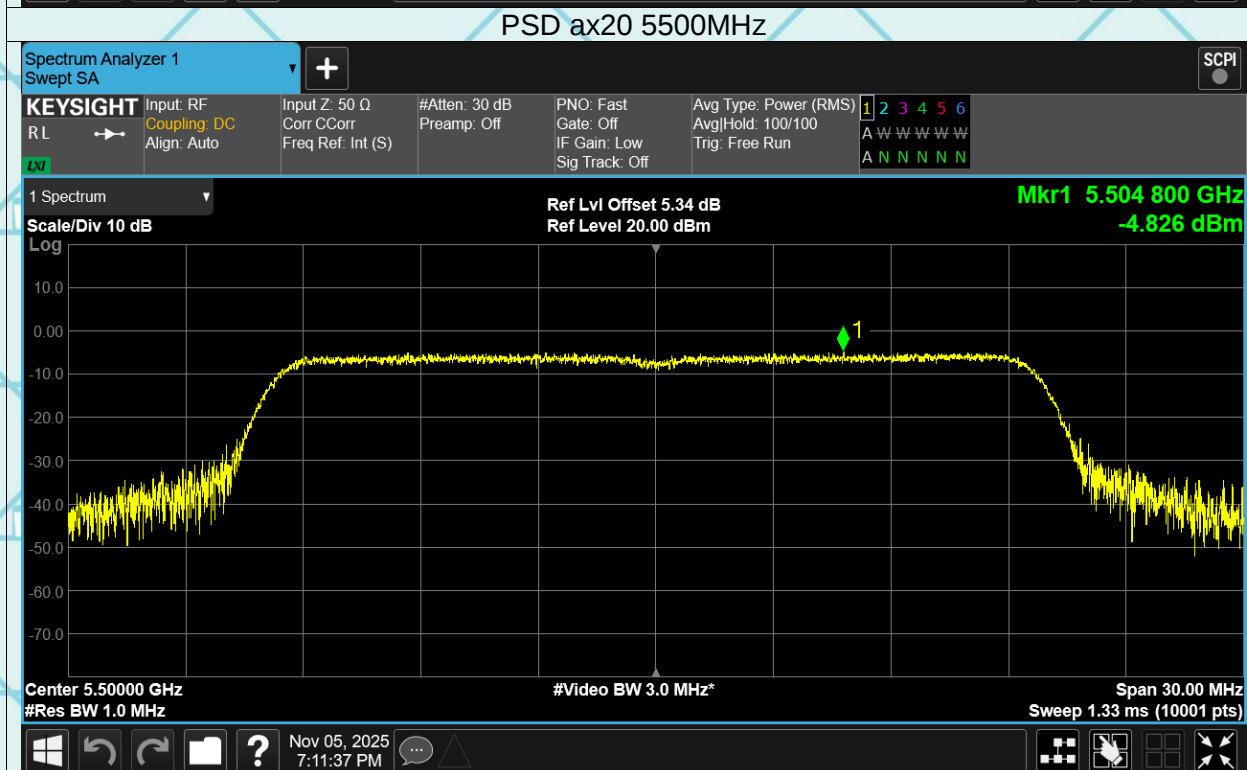
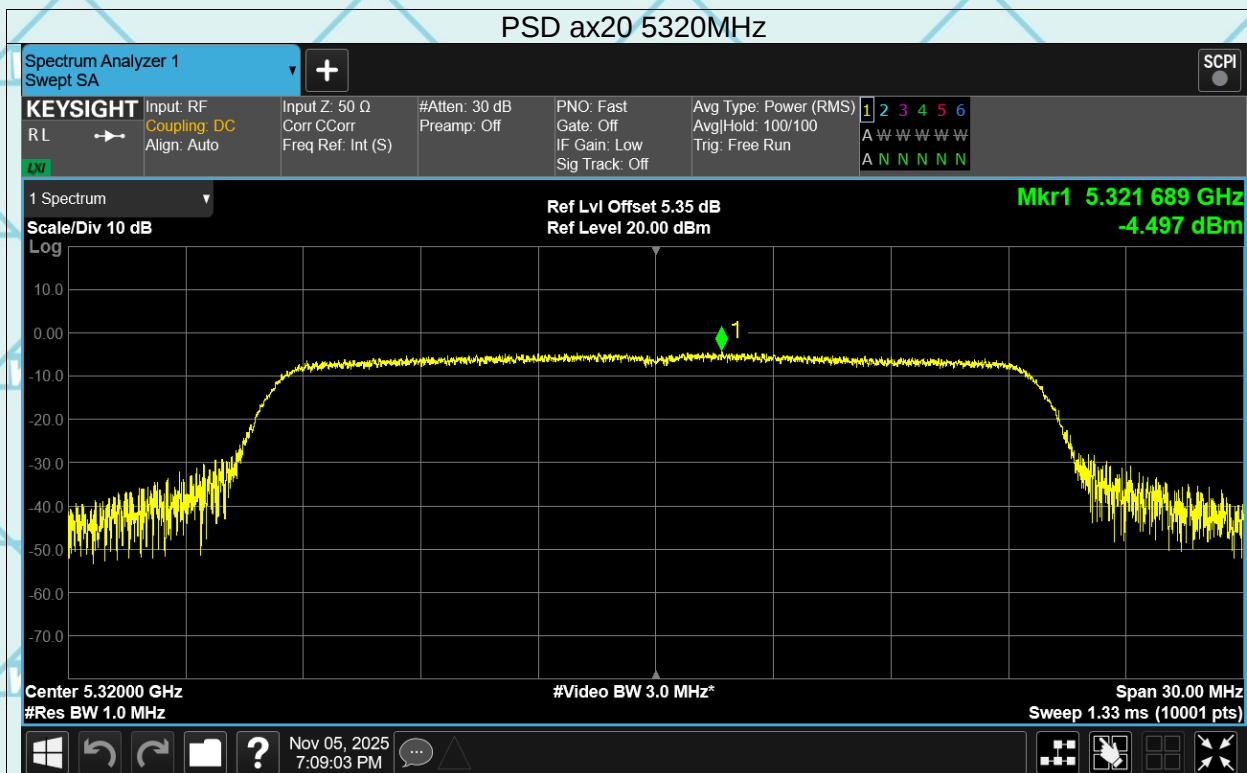


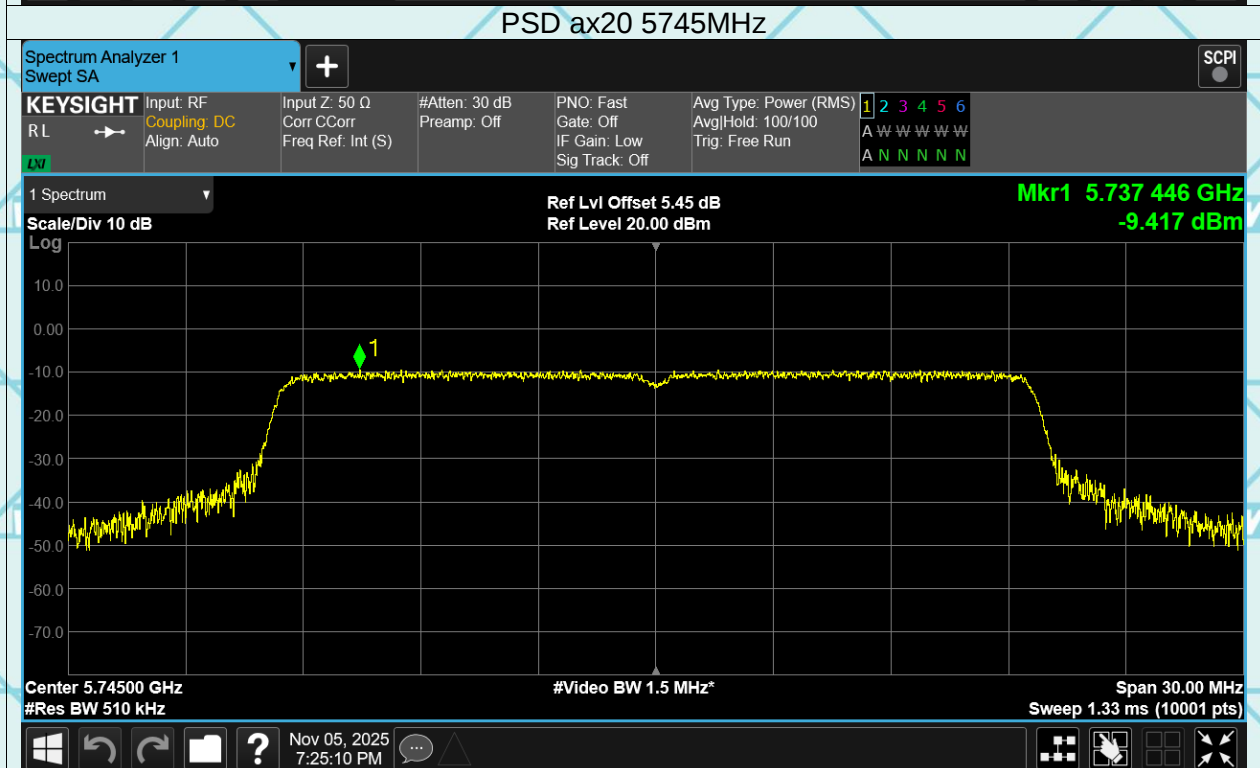
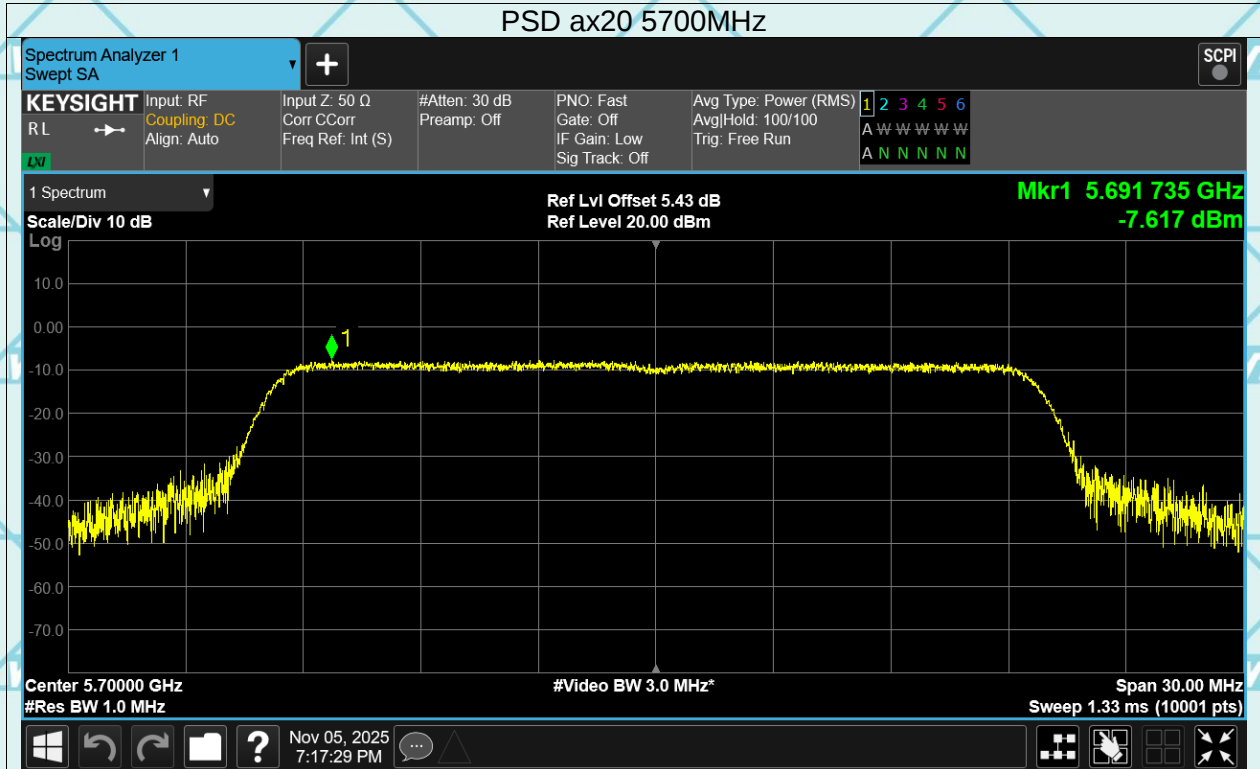


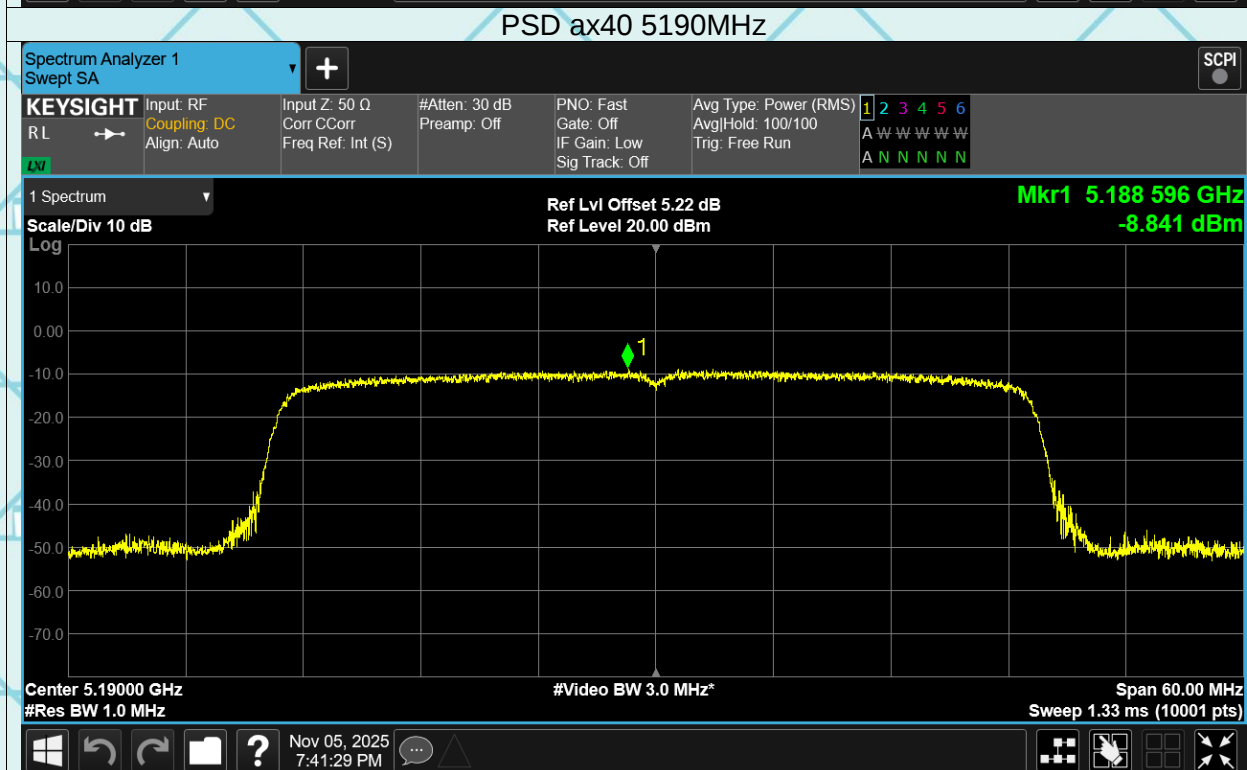
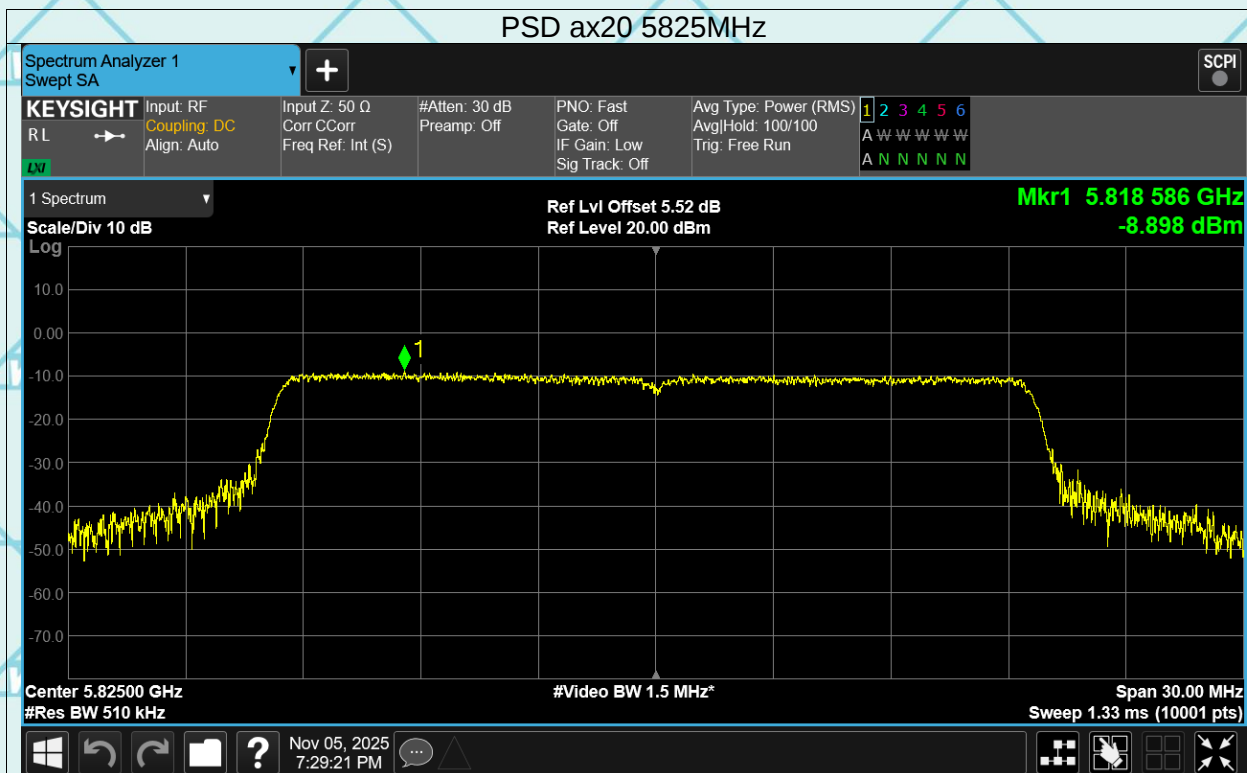


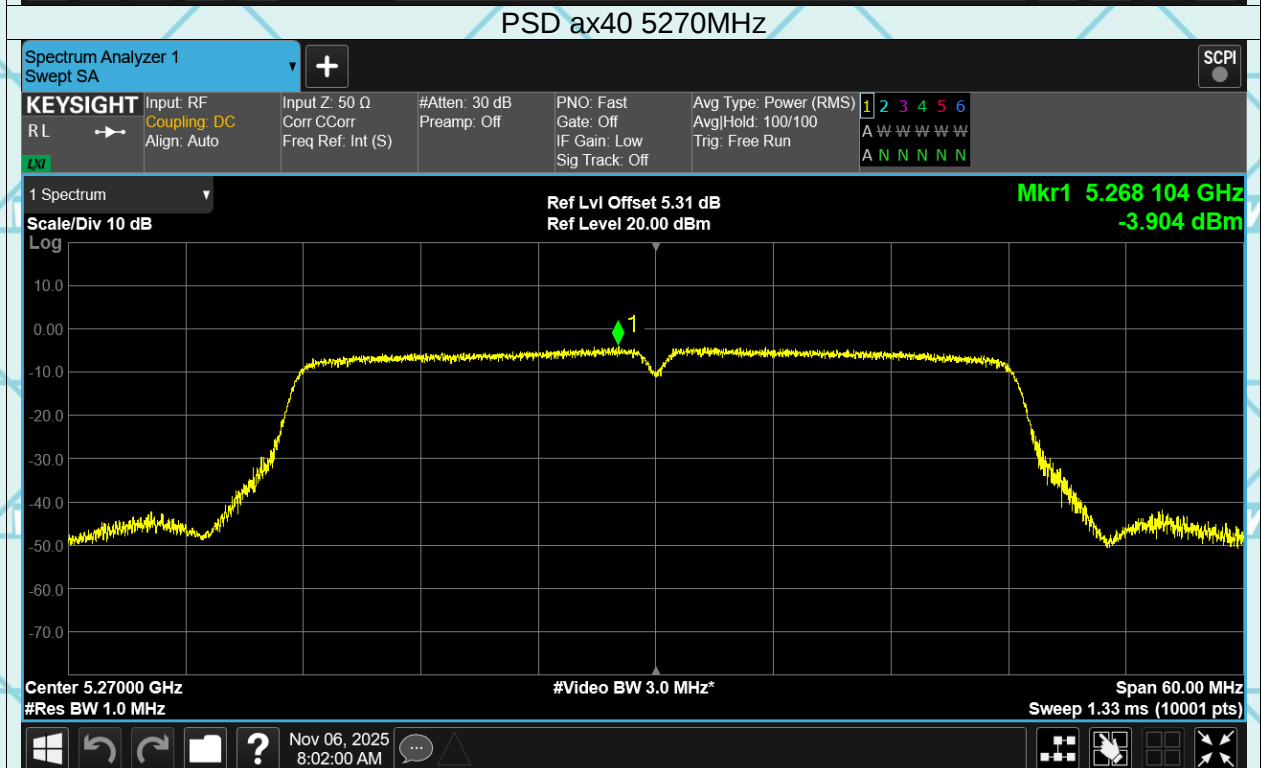
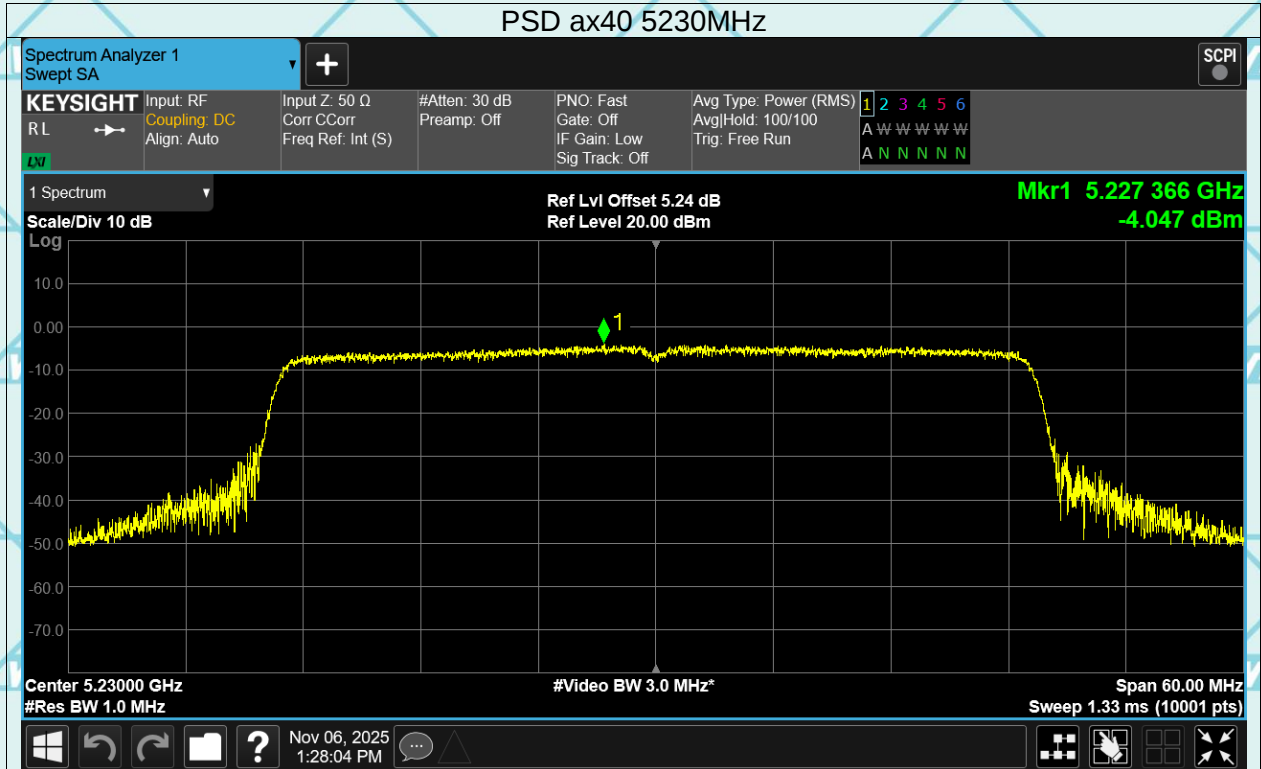


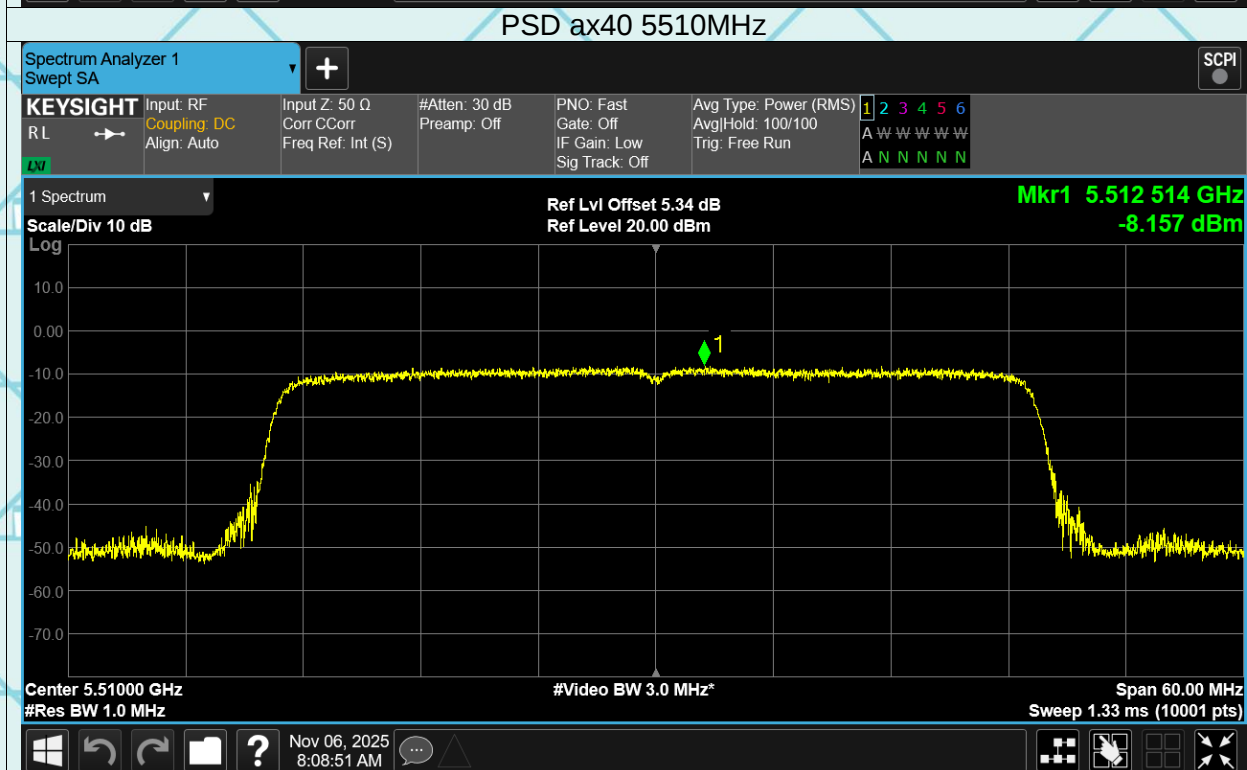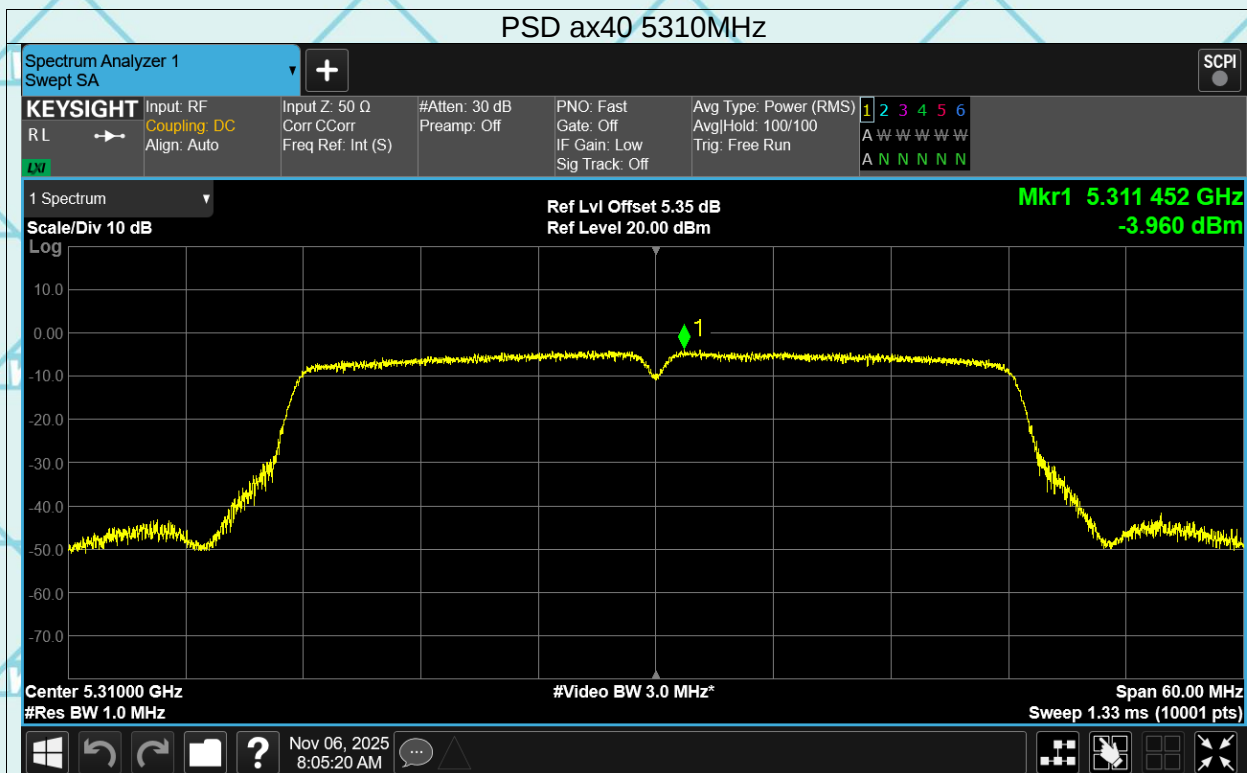

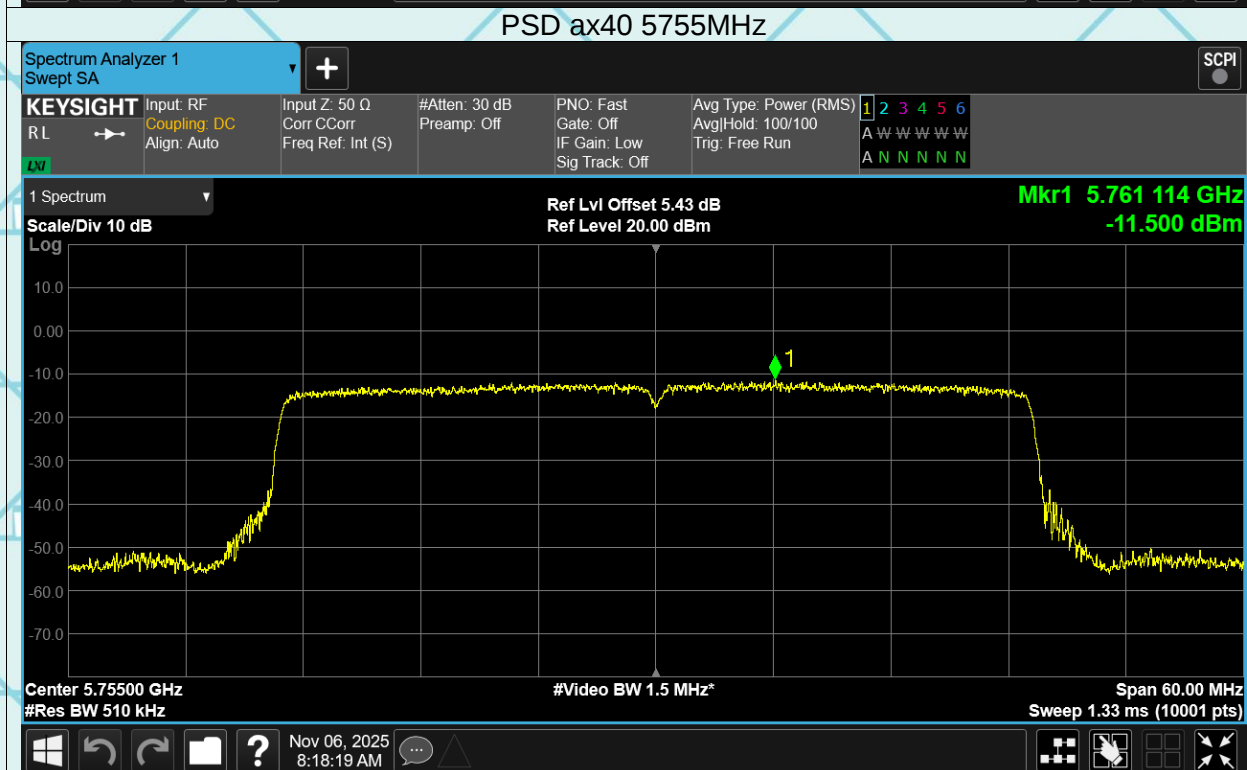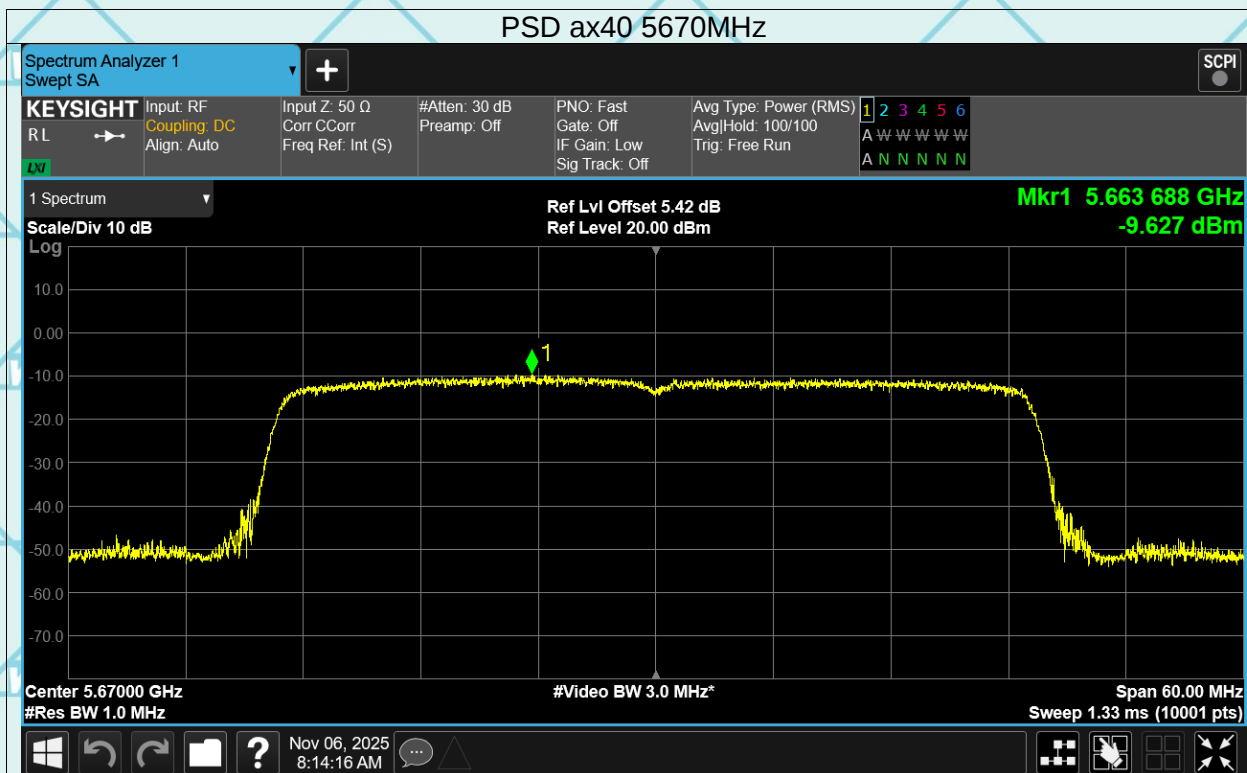

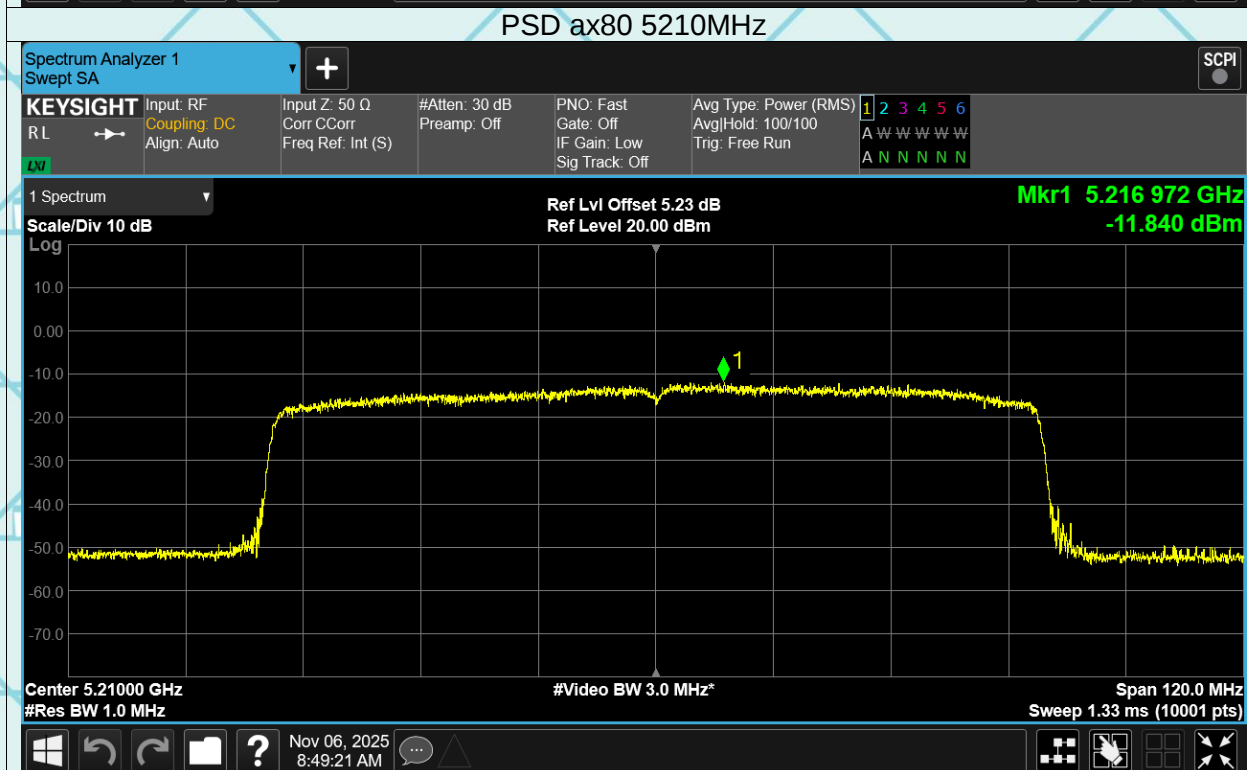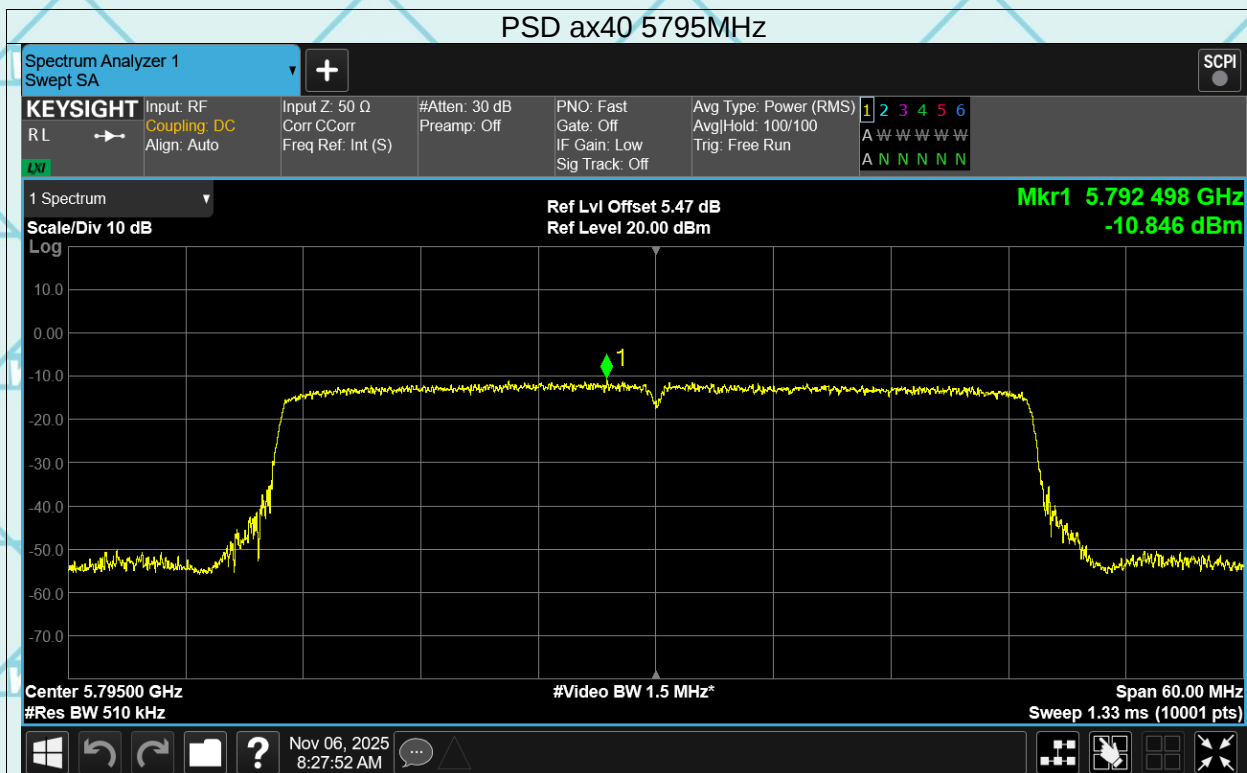

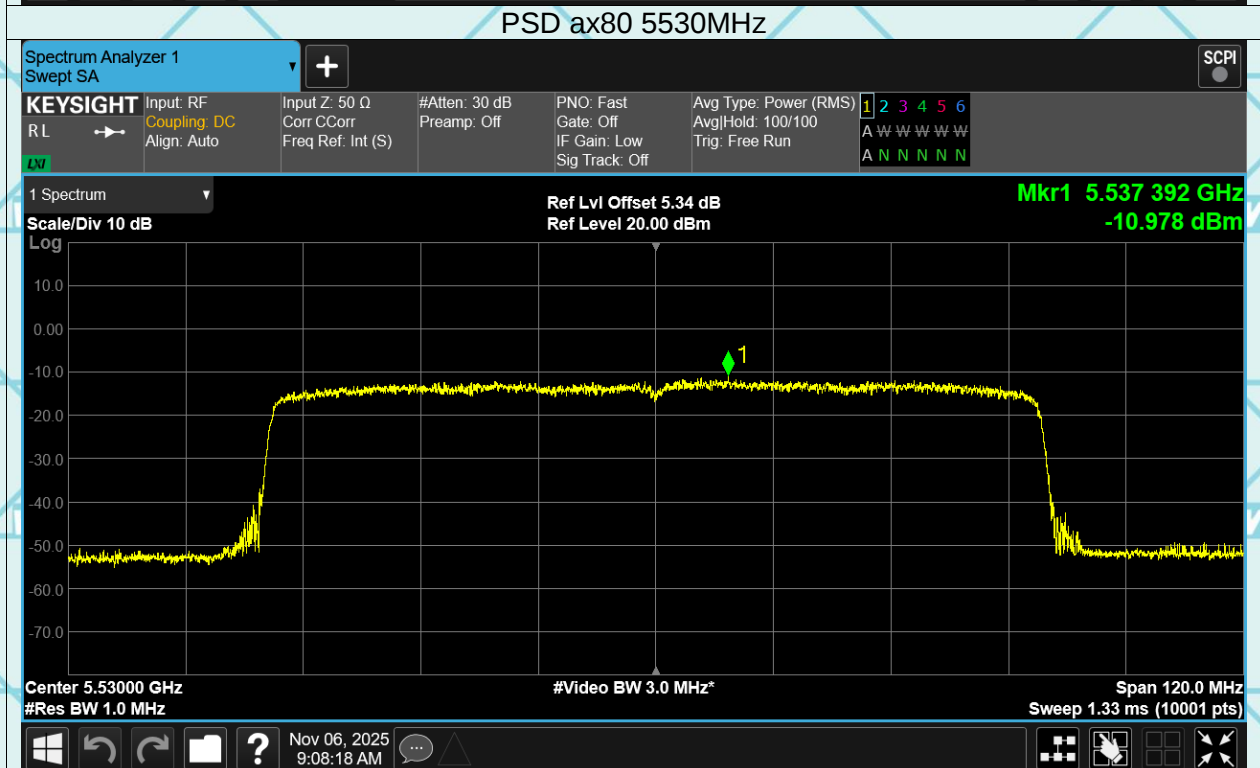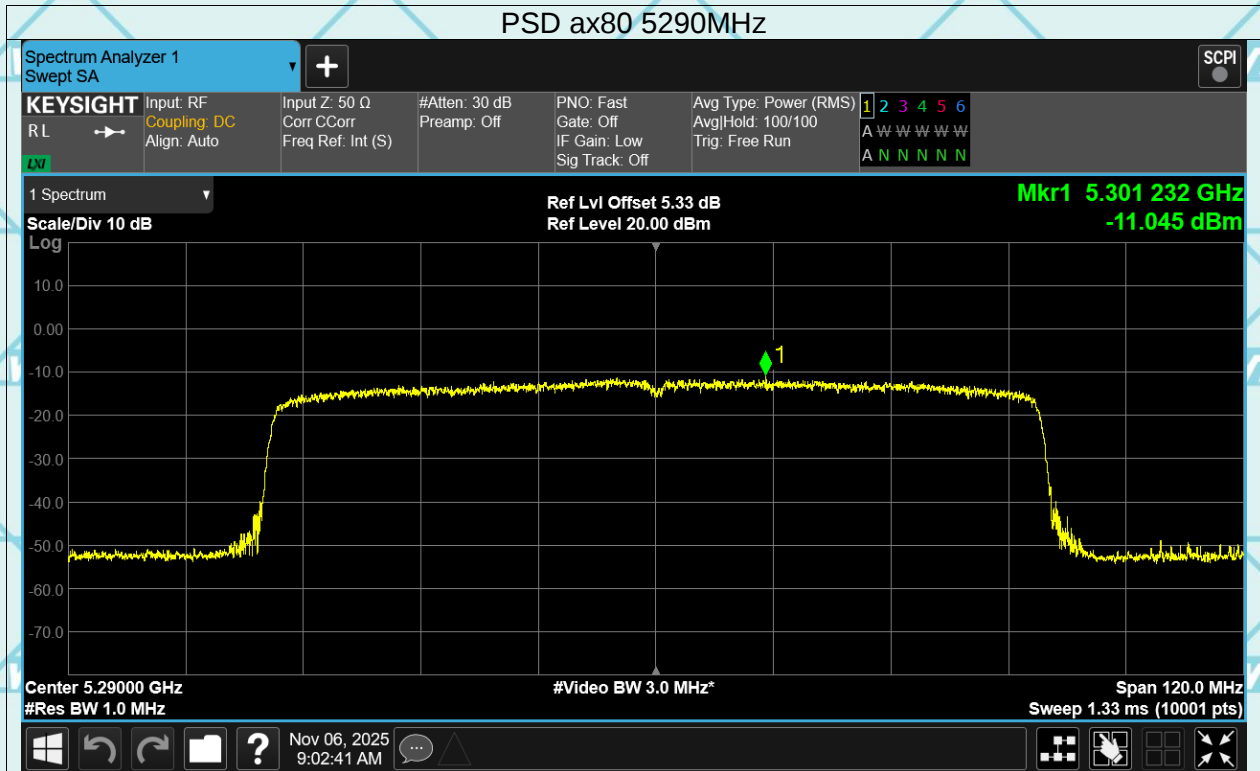

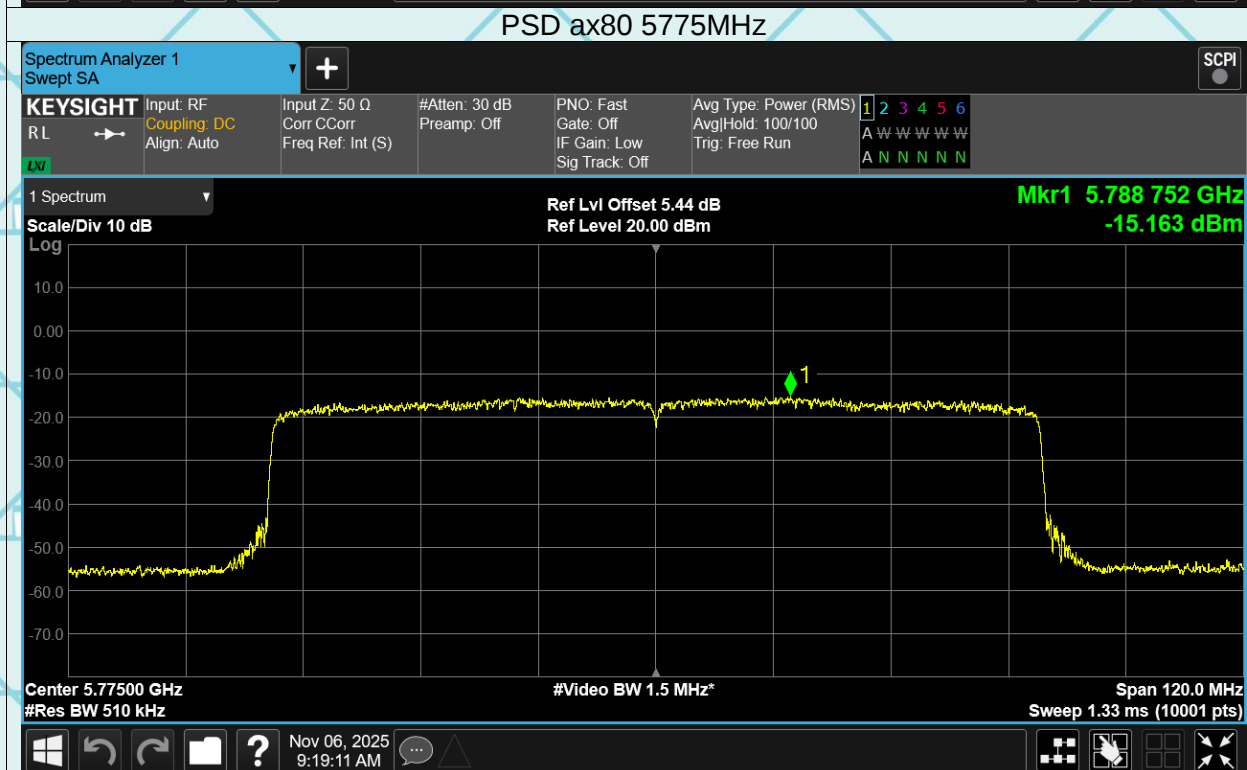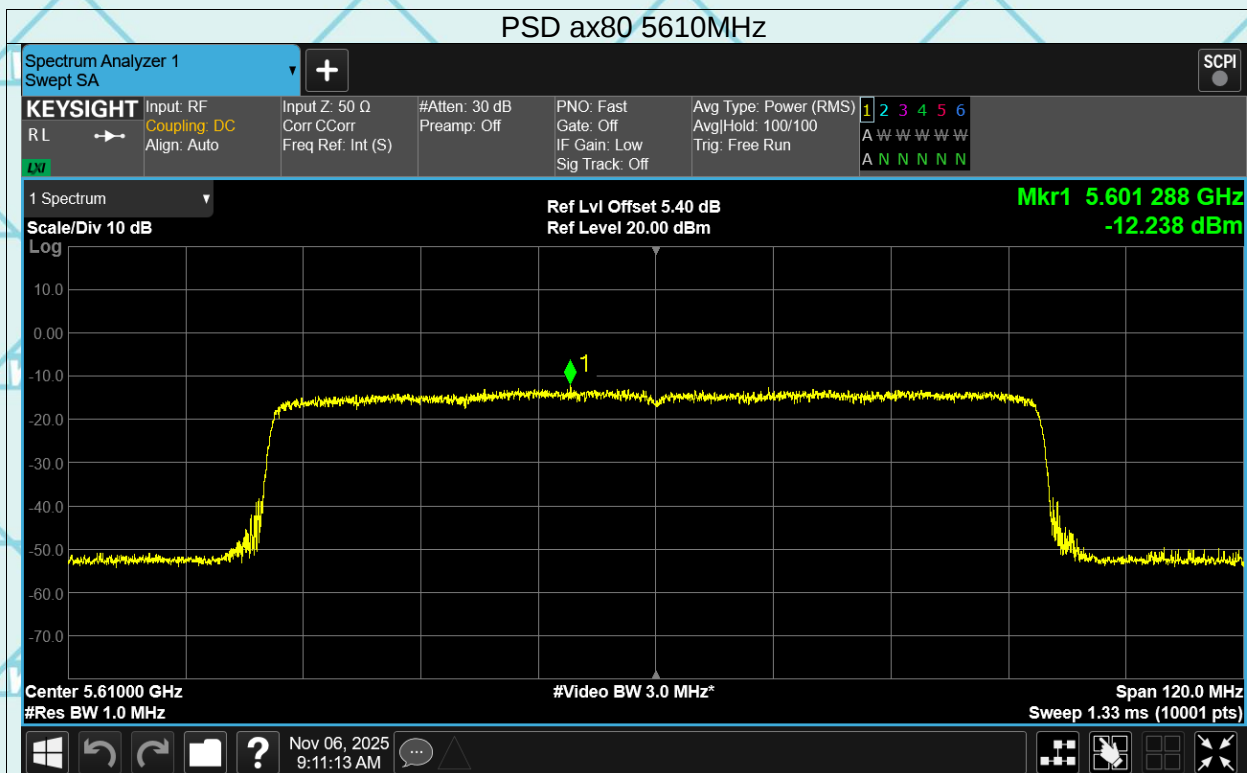

Report No.: WSCT-ANAB-R&E251000083A-Wi-Fi2

Issued Date: 11 November 2025

Revised: None

Frequency Stability

Product:	Tablet	Test Item:	Frequency Stability
Temperature:	25 °C	Humidity:	56%RH
Test Voltage:	DC 3.8V	Test Result:	PASS



Mode	Frequency (MHz)	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
a	5180	5179.92	-80000	-15.44	25	Pass
a	5240	5239.96	-40000	-7.63	25	Pass
a	5260	5259.94	-60000	-11.41	25	Pass
a	5320	5319.94	-60000	-11.28	25	Pass
a	5500	5499.92	-80000	-14.55	25	Pass
a	5700	5699.94	-60000	-10.53	25	Pass
a	5745	5744.94	-60000	-10.44	25	Pass
a	5825	5824.94	-60000	-10.3	25	Pass
n20	5180	5179.94	-60000	-11.58	25	Pass
n20	5240	5239.94	-60000	-11.45	25	Pass
n20	5260	5260.02	20000	3.8	25	Pass
n20	5320	5320	0	0	25	Pass
n20	5500	5500	0	0	25	Pass
n20	5700	5700	0	0	25	Pass
n20	5745	5745.02	20000	3.48	25	Pass
n20	5825	5825.02	20000	3.43	25	Pass
n40	5190	5190	0	0	25	Pass
n40	5230	5230	0	0	25	Pass
n40	5270	5270	0	0	25	Pass
n40	5310	5310.04	40000	7.53	25	Pass
n40	5510	5510	0	0	25	Pass
n40	5670	5670	0	0	25	Pass
n40	5755	5755	0	0	25	Pass
n40	5795	5795	0	0	25	Pass
ac20	5180	5180.02	20000	3.86	25	Pass
ac20	5240	5240.02	20000	3.82	25	Pass
ac20	5260	5260	0	0	25	Pass
ac20	5320	5320	0	0	25	Pass
ac20	5500	5500	0	0	25	Pass
ac20	5700	5700	0	0	25	Pass
ac20	5745	5745	0	0	25	Pass
ac20	5825	5825.02	20000	3.43	25	Pass
ac40	5190	5190	0	0	25	Pass
ac40	5230	5230	0	0	25	Pass
ac40	5270	5270	0	0	25	Pass
ac40	5310	5310	0	0	25	Pass
ac40	5510	5510	0	0	25	Pass
ac40	5670	5670	0	0	25	Pass
ac40	5755	5755	0	0	25	Pass
ac40	5795	5795	0	0	25	Pass
ac80	5210	5210	0	0	25	Pass
ac80	5290	5290.08	80000	15.12	25	Pass
ac80	5530	5530	0	0	25	Pass
ac80	5610	5610	0	0	25	Pass
ac80	5775	5775	0	0	25	Pass
ax20	5180	5180	0	0	25	Pass
ax20	5240	5240	0	0	25	Pass
ax20	5260	5260	0	0	25	Pass
ax20	5320	5320	0	0	25	Pass
ax20	5500	5500	0	0	25	Pass
ax20	5700	5700	0	0	25	Pass
ax20	5745	5745.02	20000	3.48	25	Pass
ax20	5825	5825	0	0	25	Pass
ax40	5190	5190.04	40000	7.71	25	Pass
ax40	5230	5230.04	40000	7.65	25	Pass
ax40	5270	5270	0	0	25	Pass
ax40	5310	5310	0	0	25	Pass
ax40	5510	5509.96	-40000	-7.26	25	Pass
ax40	5670	5669.96	-40000	-7.05	25	Pass

Report No.: WSCT-ANAB-R&E251000083A-Wi-Fi2


Issued Date: 11 November 2025

Revised: None


ax40	5755	5755	0	0	25	Pass
ax40	5795	5795	0	0	25	Pass
ax80	5210	5210.08	80000	15.36	25	Pass
ax80	5290	5290	0	0	25	Pass
ax80	5530	5530	0	0	25	Pass
ax80	5610	5610	0	0	25	Pass
ax80	5775	5775	0	0	25	Pass

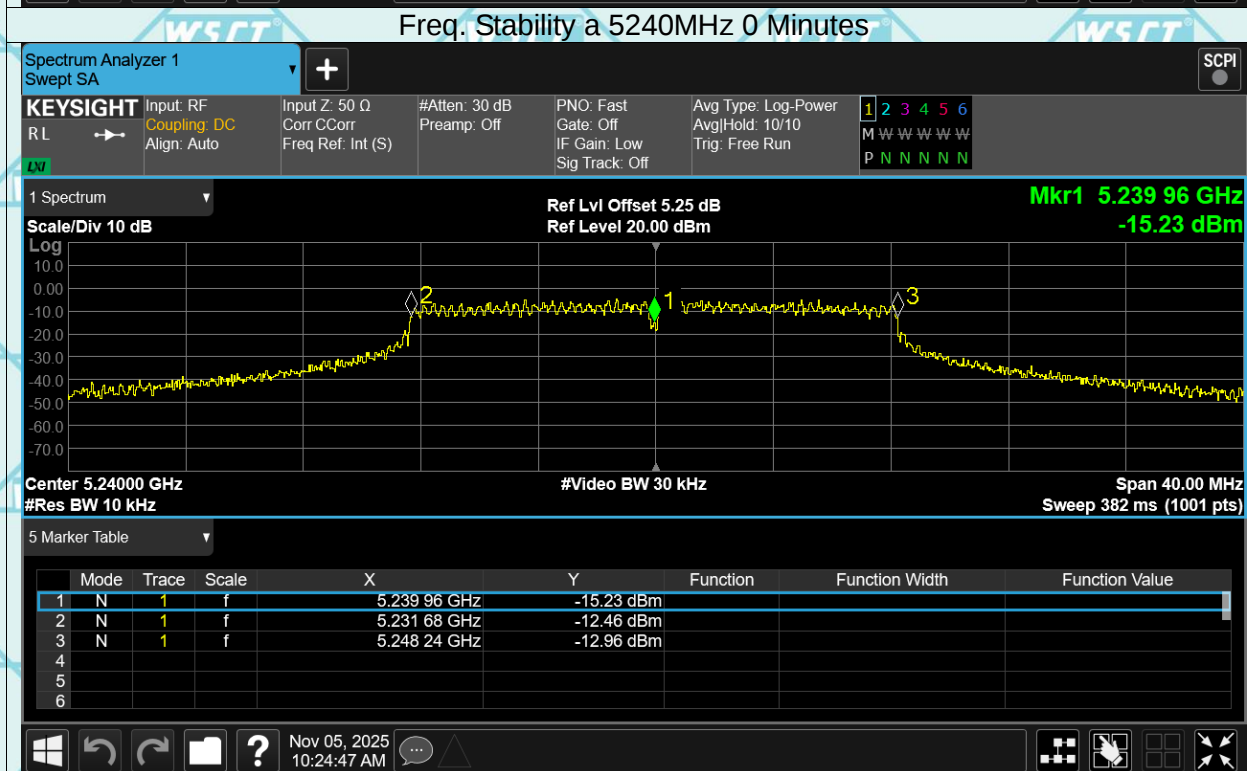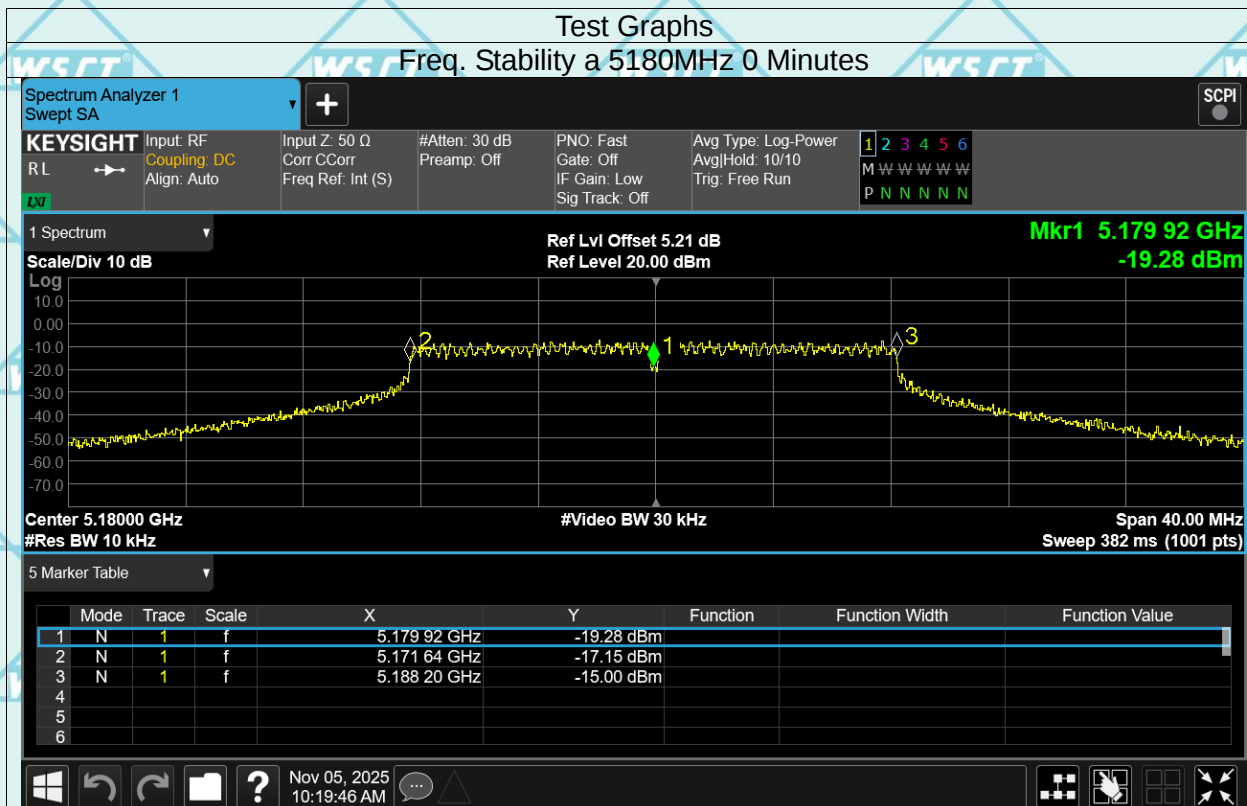


Freq. Stability a 5260MHz 0 Minutes

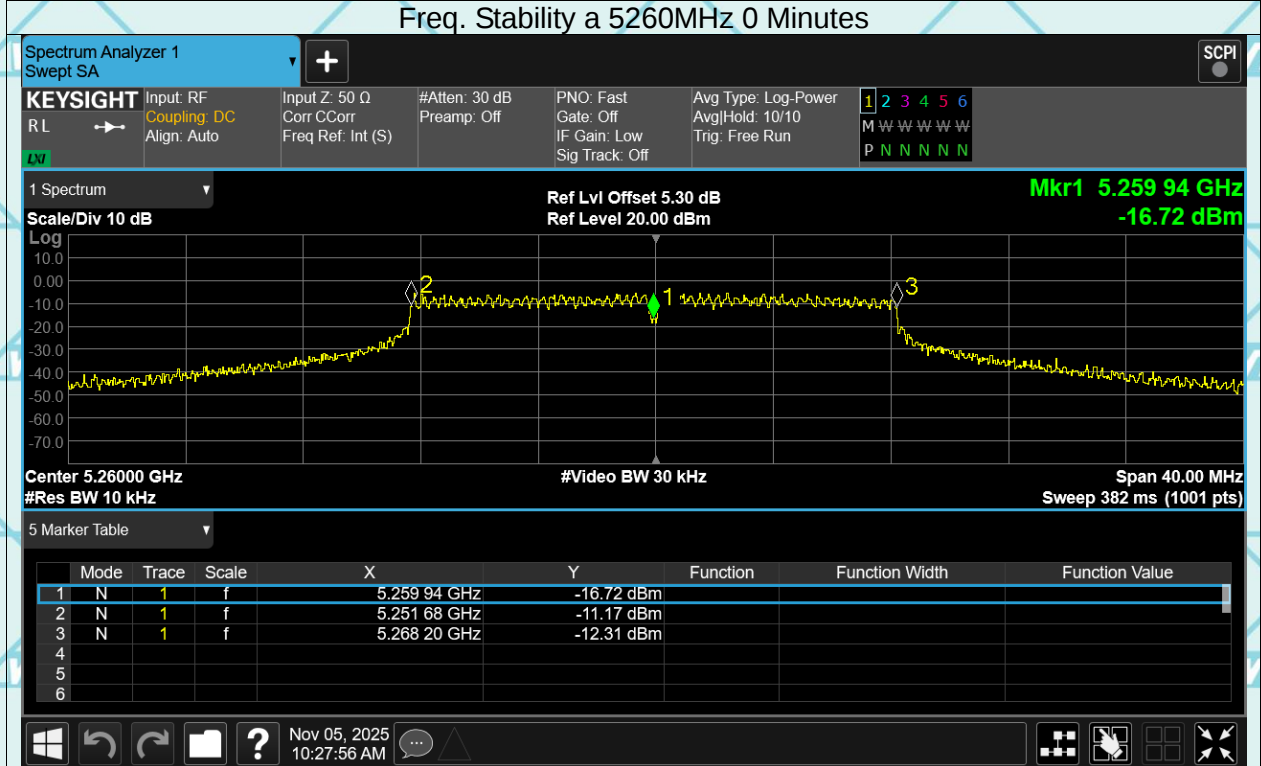


Freq. Stability a 5320MHz 0 Minutes

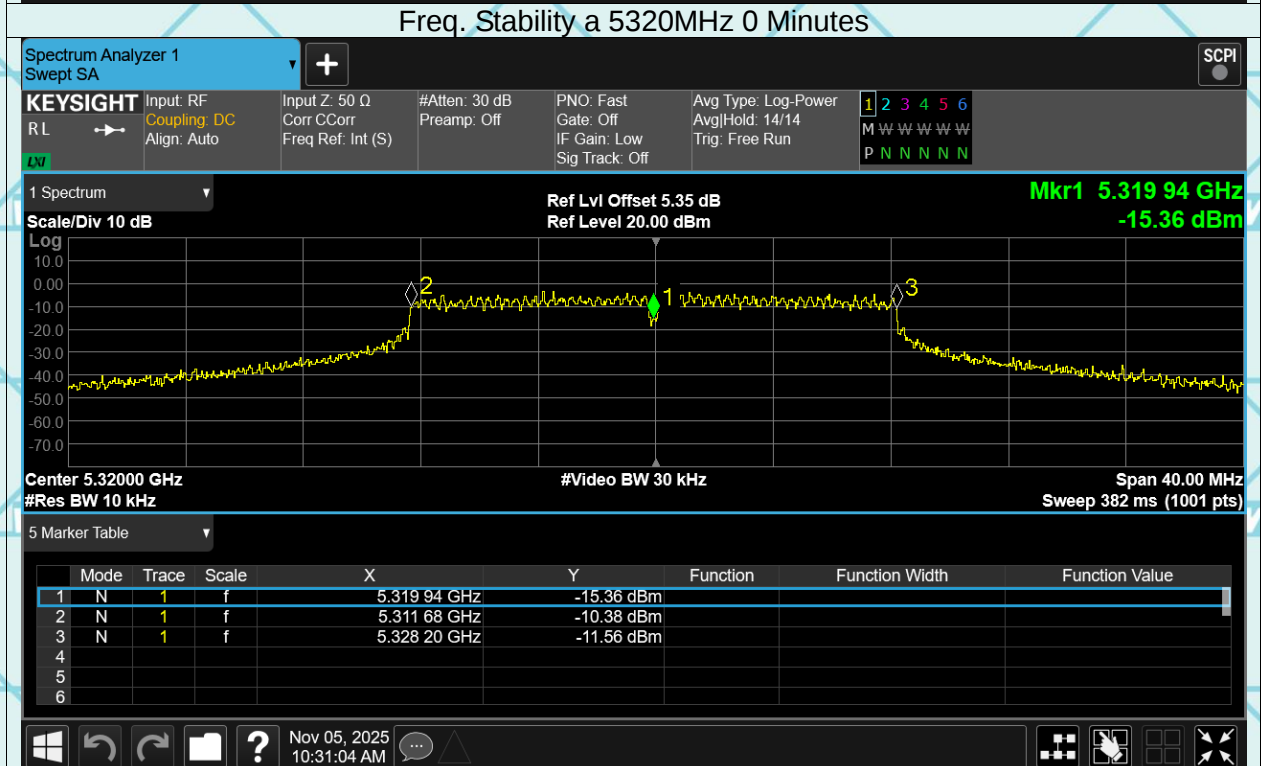


Freq. Stability a 5500MHz 0 Minutes

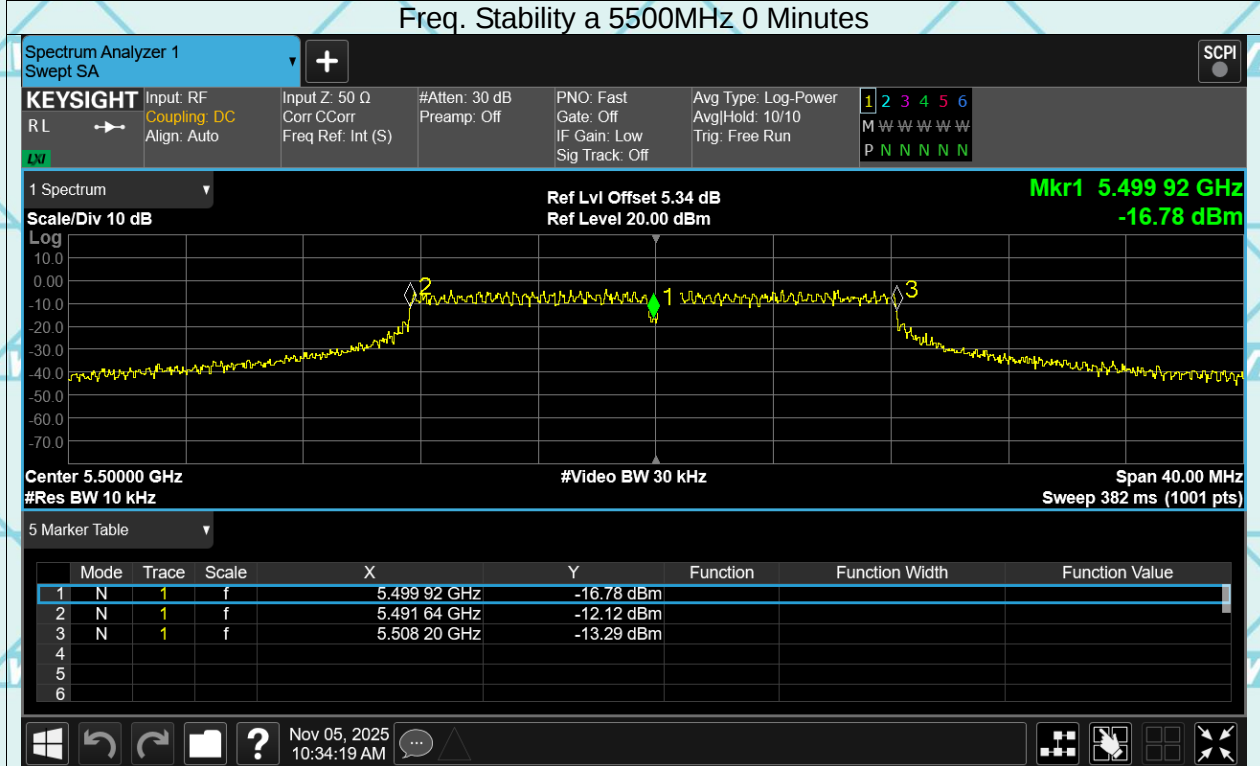

Freq. Stability a 5700MHz 0 Minutes

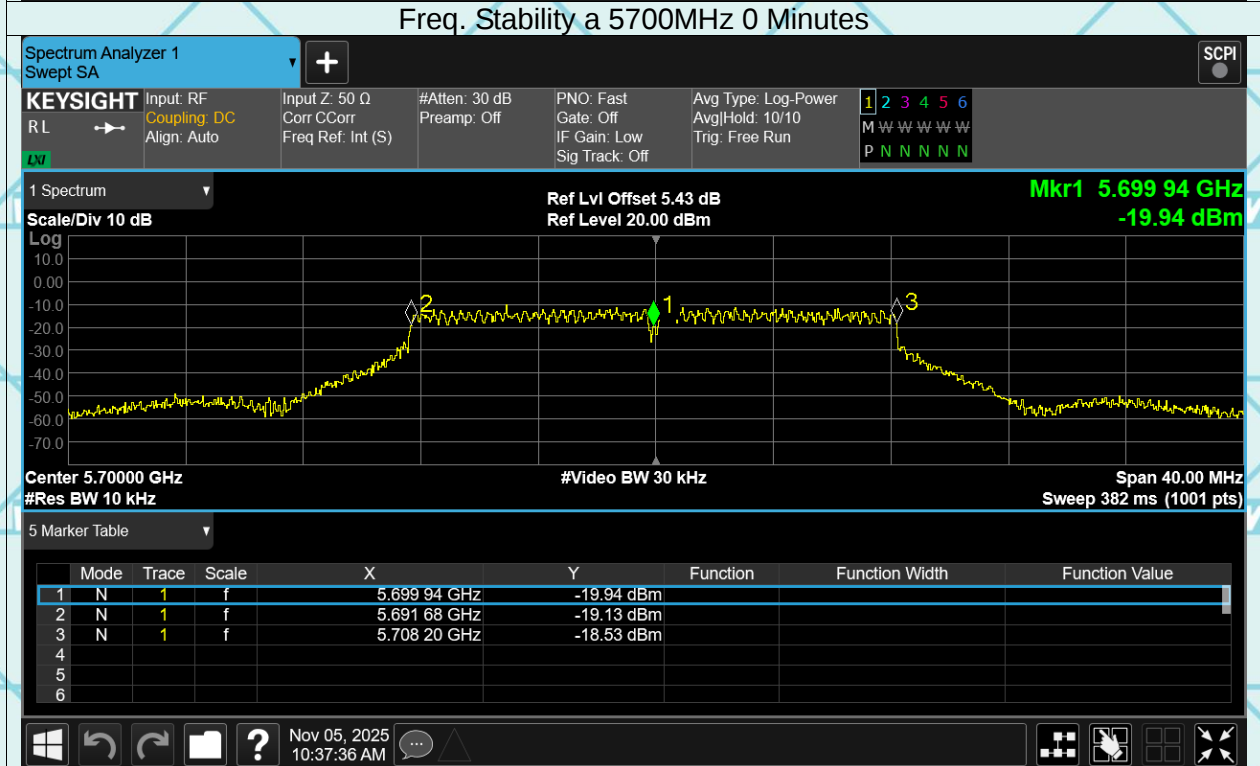

Freq. Stability a 5745MHz 0 Minutes

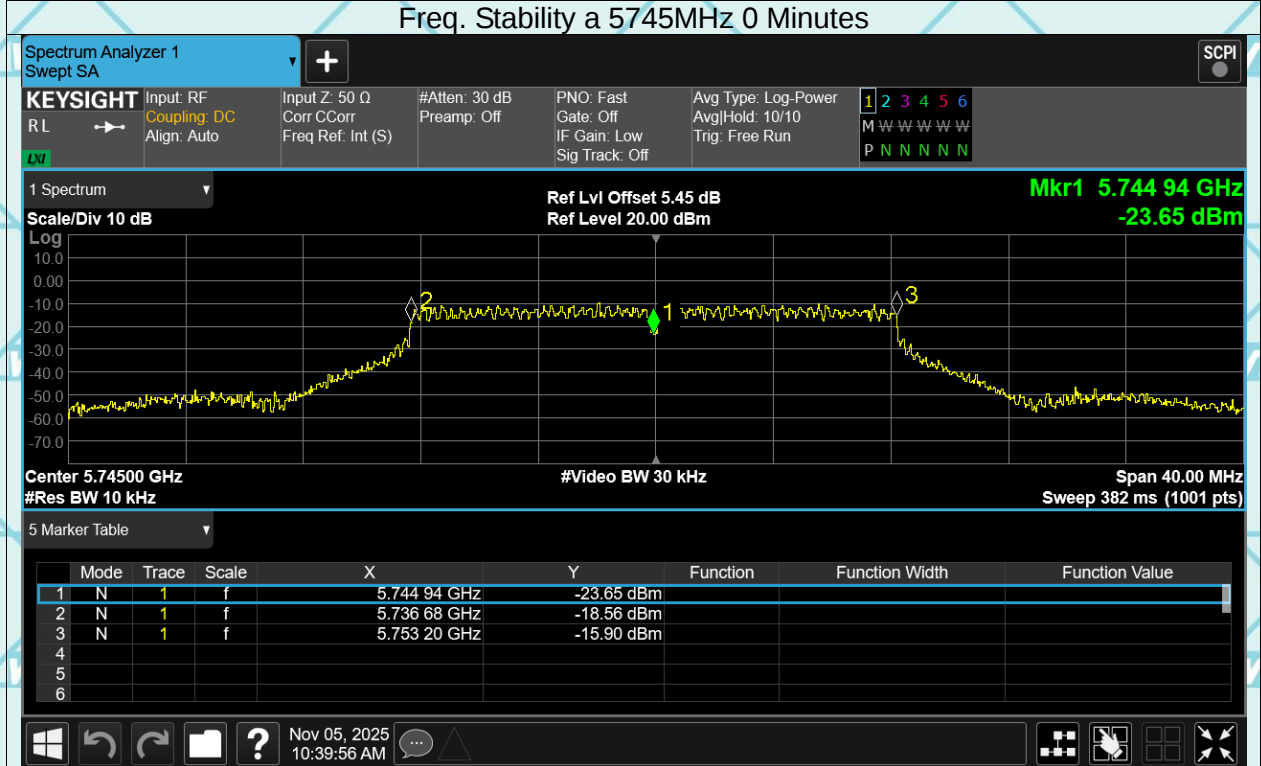

Freq. Stability a 5825MHz 0 Minutes

