


Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11N40_MCS0_5310	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 16:43:24

Test Graph

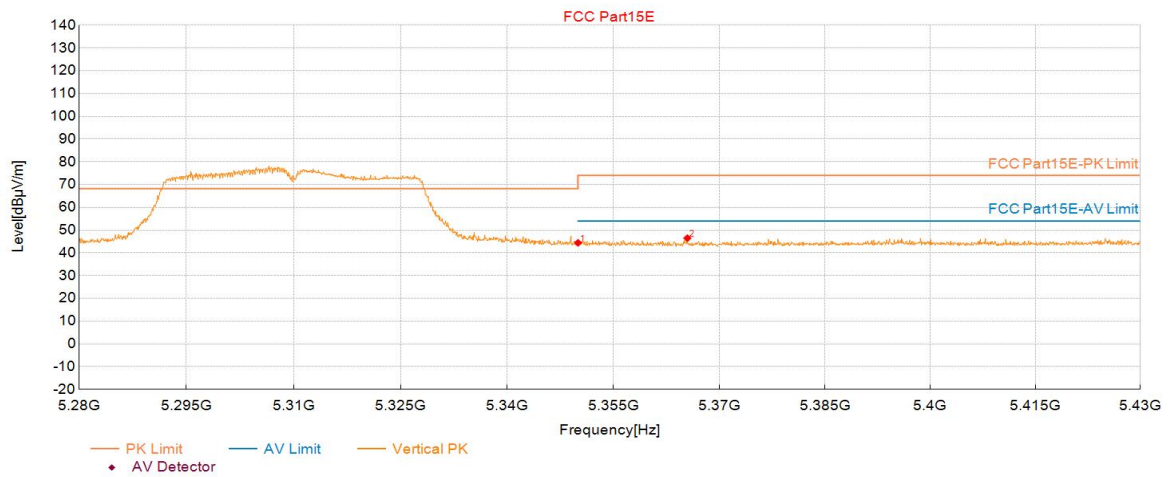

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.01	50.10	44.40	-5.70	74.00	29.60	150	2	Vertical
2	5365.47	52.13	46.44	-5.69	74.00	27.56	150	170	Vertical


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11N40_MCS0_5510	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 16:54:16

Test Graph

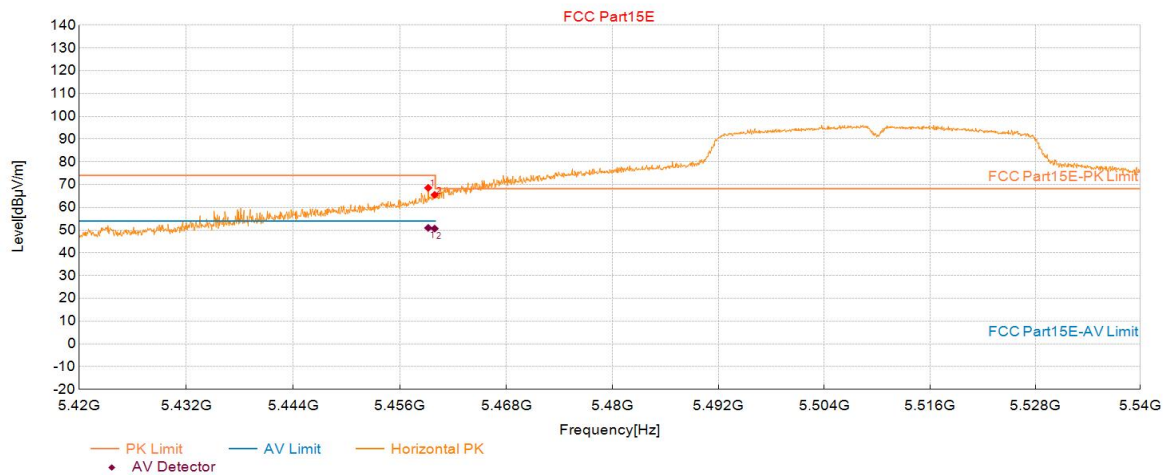

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5459.20	74.01	68.57	-5.44	74.00	5.43	150	48	Horizontal
2	5459.92	70.94	65.50	-5.44	74.00	8.50	150	17	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5459.20	56.40	-5.44	50.96	54.00	3.04	150	48	Horizontal
2	5459.92	56.10	-5.44	50.66	54.00	3.34	150	17	Horizontal


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11N40_MCS0_5510	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 16:57:55

Test Graph

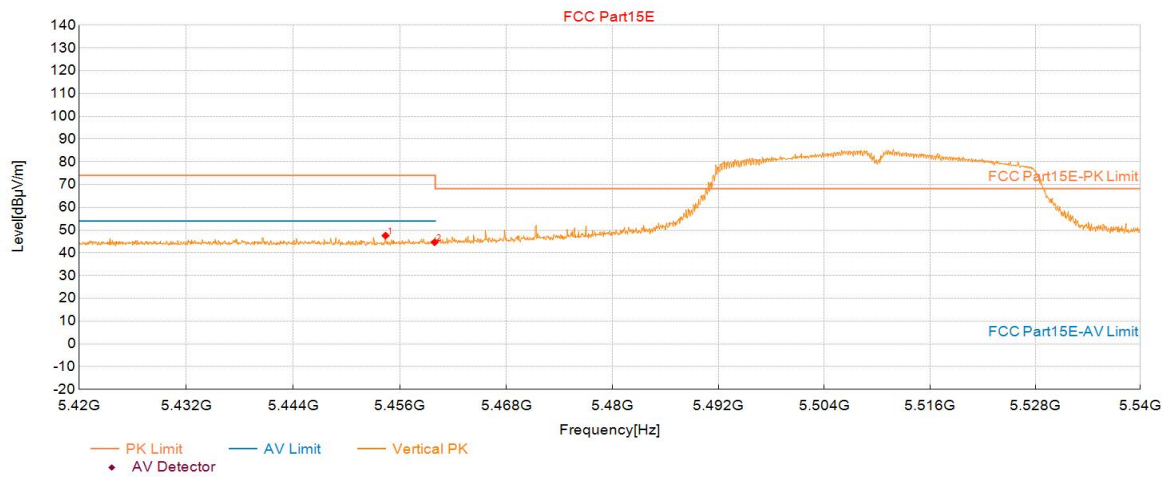

Suspected Data List									
NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5454.40	53.03	47.57	-5.46	74.00	26.43	150	260	Vertical
2	5459.92	50.07	44.63	-5.44	74.00	29.37	150	303	Vertical


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11N40_MCS0_5670	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 16:59:43

Test Graph

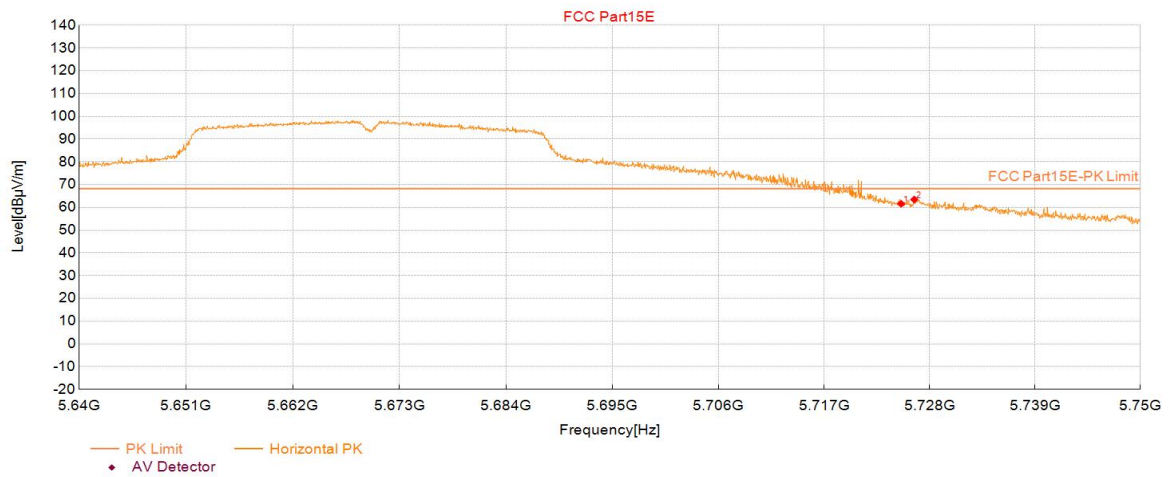

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.02	66.00	61.56	-4.44	68.20	6.64	150	65	Horizontal
2	5726.39	67.88	63.44	-4.44	68.20	4.76	150	54	Horizontal


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11N40_MCS0_5670	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 17:00:22

Test Graph

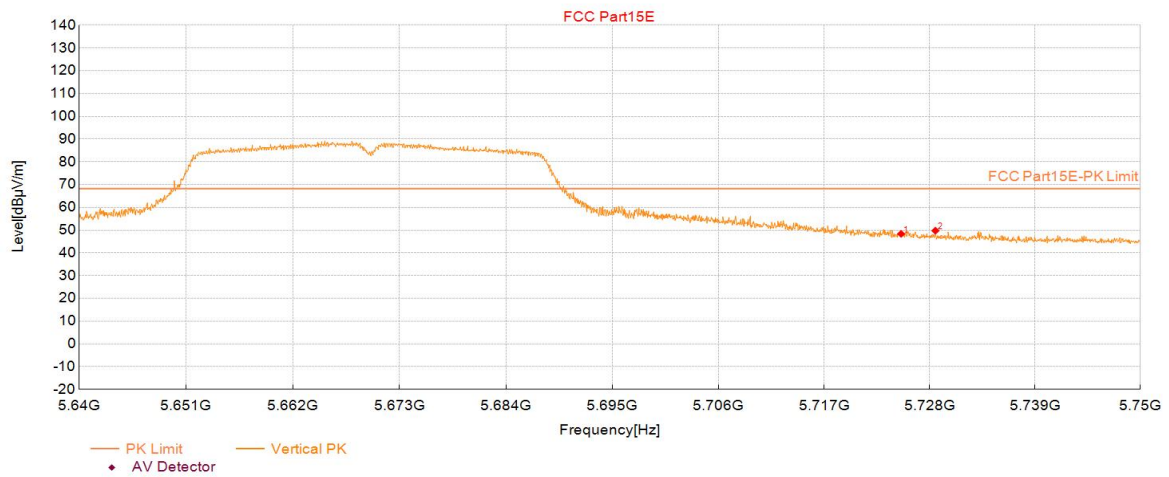

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.02	52.79	48.35	-4.44	68.20	19.85	150	215	Vertical
2	5728.59	54.18	49.74	-4.44	68.20	18.46	150	128	Vertical


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11N40_MCS0_5755	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 17:03:47

Test Graph

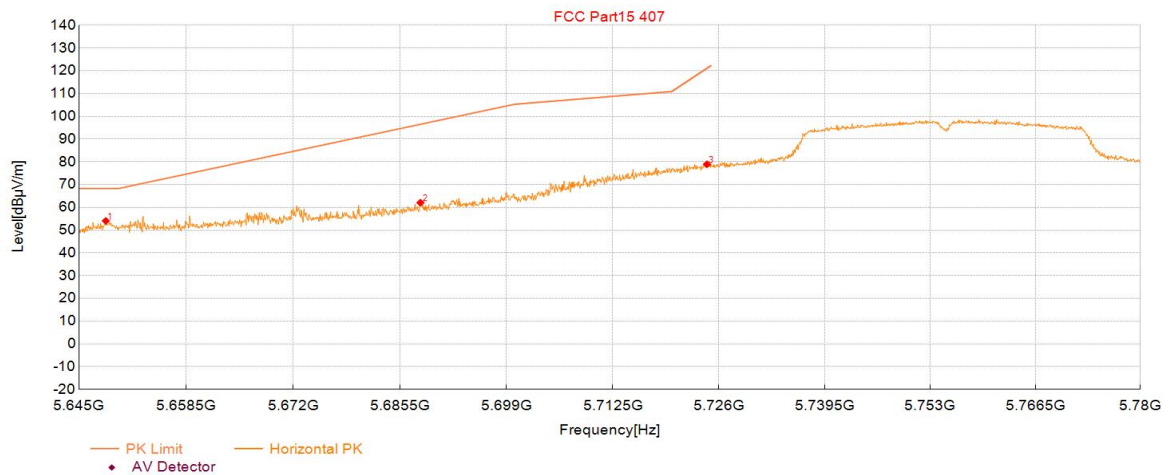

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5648.38	59.13	54.06	-5.07	68.30	14.24	150	50	Horizontal
2	5688.09	66.64	62.05	-4.59	96.51	34.46	150	50	Horizontal
3	5724.49	83.35	78.91	-4.44	121.13	42.22	150	356	Horizontal


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11N40_MCS0_5755	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 17:04:24

Test Graph

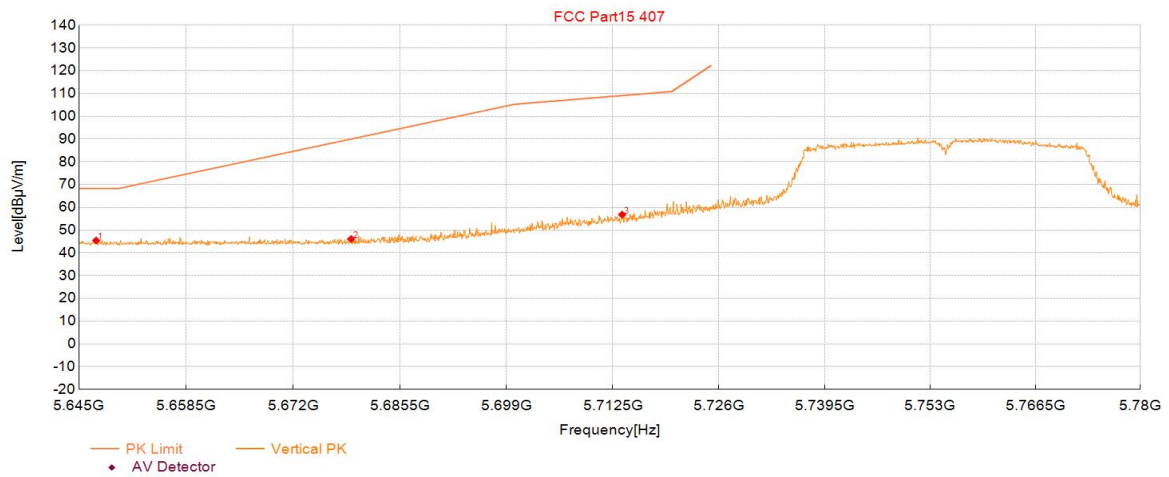

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5647.16	50.53	45.44	-5.09	68.30	22.86	150	138	Vertical
2	5679.31	50.75	46.06	-4.69	90.03	43.97	150	322	Vertical
3	5713.68	61.24	56.80	-4.44	109.13	52.33	150	75	Vertical


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11N40_MCS0_5795	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 17:06:31

Test Graph

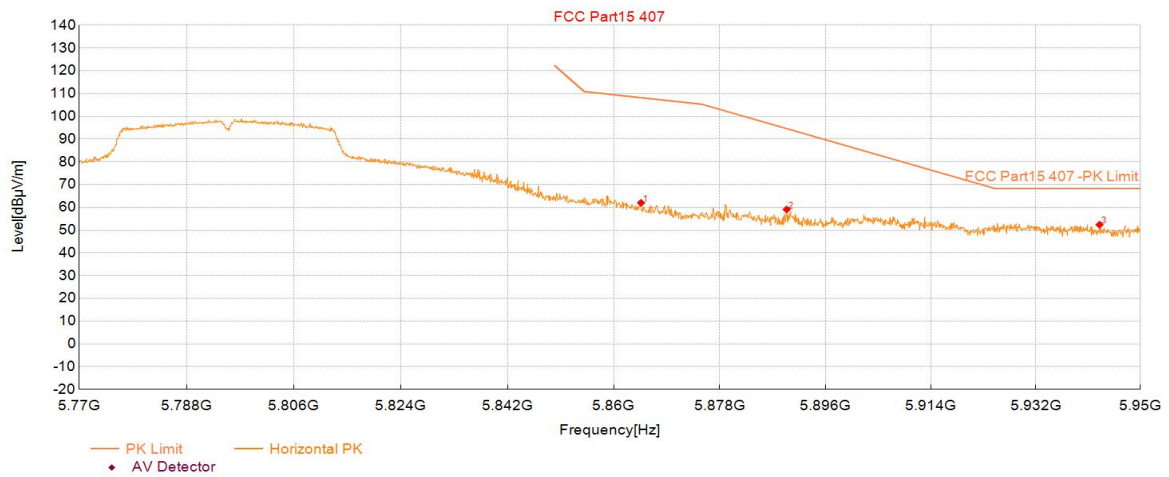

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5864.64	65.82	61.99	-3.83	108.20	46.21	150	0	Horizontal
2	5889.40	62.68	59.08	-3.60	94.61	35.53	150	42	Horizontal
3	5942.98	56.06	52.38	-3.68	68.30	15.92	150	47	Horizontal


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11N40_MCS0_5795	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 17:07:08

Test Graph

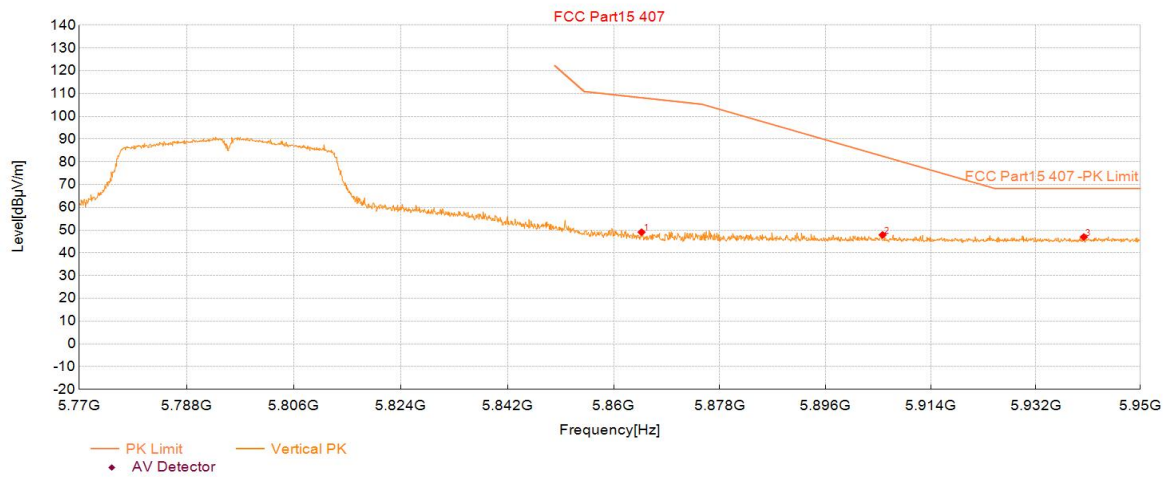

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5864.73	52.91	49.08	-3.83	108.17	59.09	150	132	Vertical
2	5905.79	51.42	47.89	-3.53	82.48	34.59	150	205	Vertical
3	5940.28	50.63	46.96	-3.67	68.30	21.34	150	9	Vertical


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11AC20_MCS0_5180	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 17:13:39

Test Graph

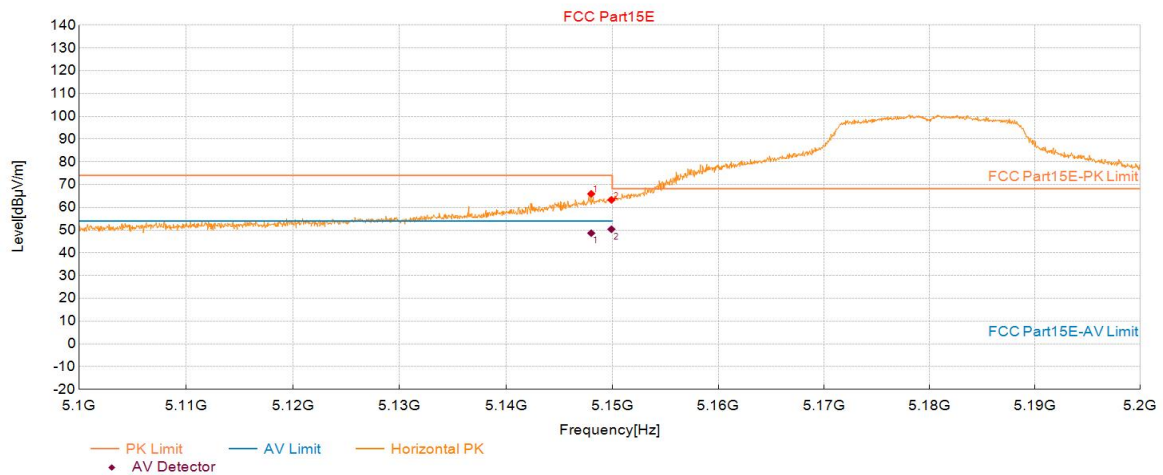

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5148.02	72.05	65.94	-6.11	74.00	8.06	150	3	Horizontal
2	5149.92	69.37	63.27	-6.10	74.00	10.73	150	8	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5148.02	54.78	-6.11	48.67	54.00	5.33	150	3	Horizontal
2	5149.92	56.48	-6.10	50.38	54.00	3.62	150	8	Horizontal


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11AC20_MCS0_5180	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 17:14:19

Test Graph

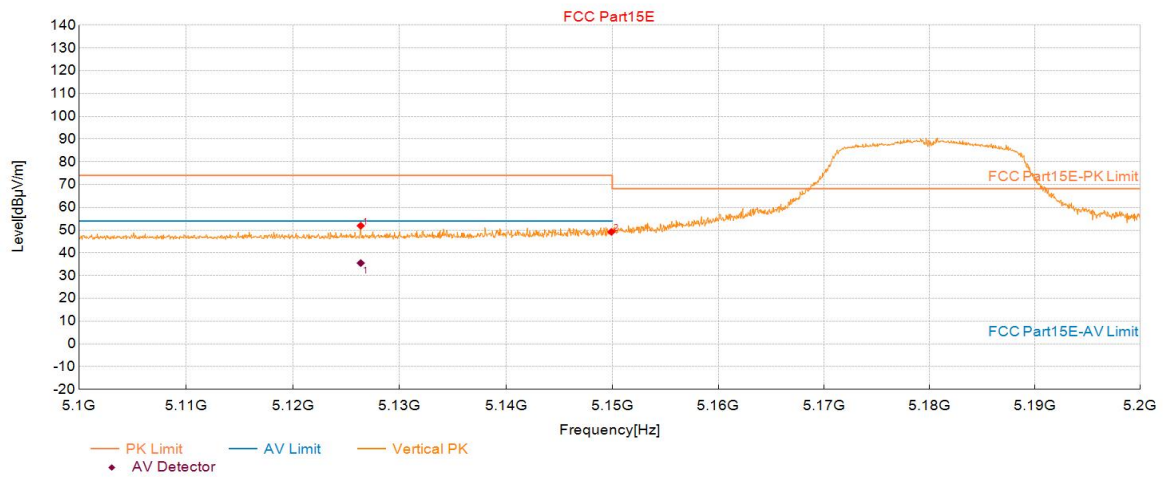

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5126.36	58.22	51.91	-6.31	74.00	22.09	150	256	Vertical
2	5149.92	55.31	49.21	-6.10	74.00	24.79	150	275	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5126.36	41.82	-6.31	35.51	54.00	18.49	150	256	Vertical


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11AC20_MCS0_5320	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 17:16:30

Test Graph

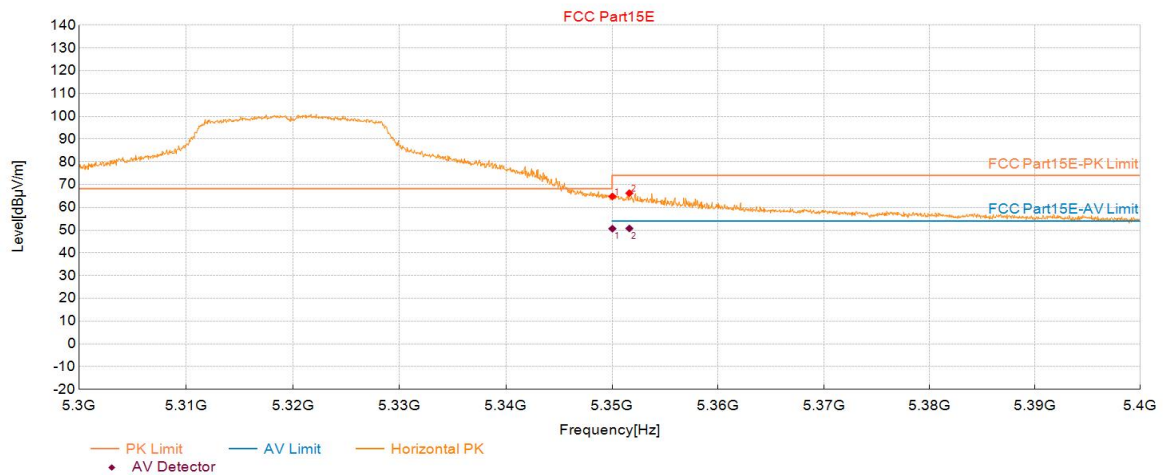

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.03	70.51	64.81	-5.70	74.00	9.19	150	50	Horizontal
2	5351.63	71.94	66.24	-5.70	74.00	7.76	150	18	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.03	56.33	-5.70	50.63	54.00	3.37	150	50	Horizontal
2	5351.63	56.43	-5.70	50.73	54.00	3.27	150	18	Horizontal


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11AC20_MCS0_5320	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 17:17:10

Test Graph

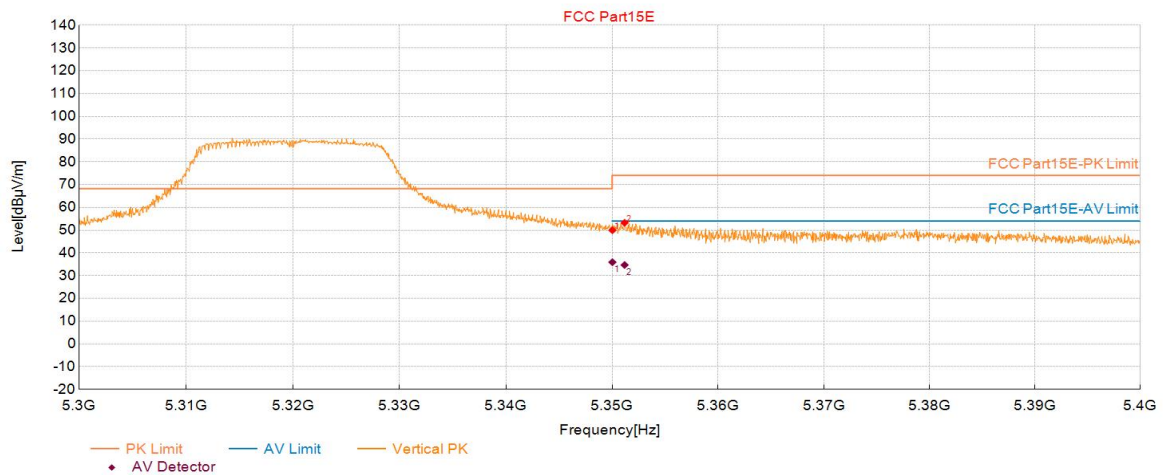

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.03	55.63	49.93	-5.70	74.00	24.07	150	354	Vertical
2	5351.18	58.92	53.22	-5.70	74.00	20.78	150	331	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.03	41.59	-5.70	35.89	54.00	18.11	150	354	Vertical
2	5351.18	40.36	-5.70	34.66	54.00	19.34	150	331	Vertical


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11AC20_MCS0_5500	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 17:20:08

Test Graph

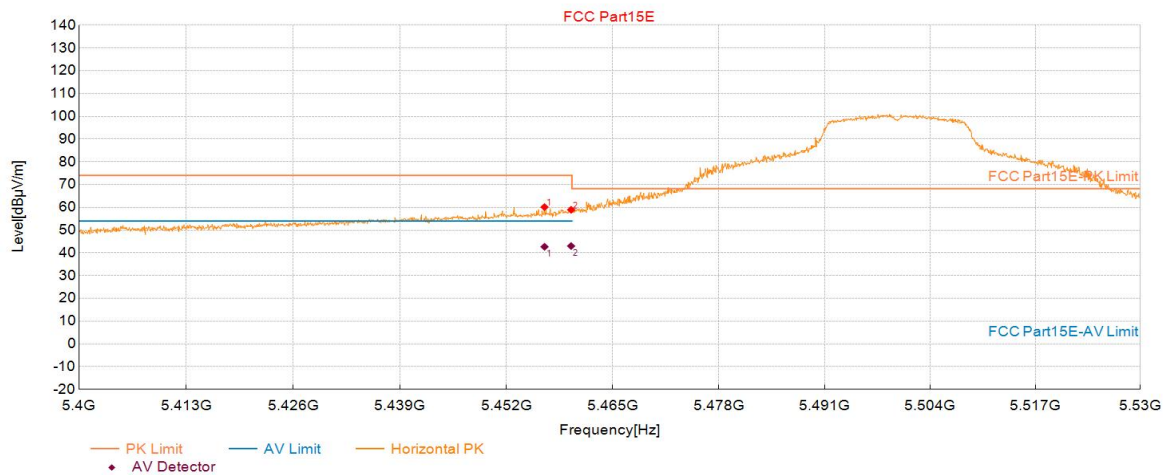

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5456.64	65.56	60.11	-5.45	74.00	13.89	150	3	Horizontal
2	5459.89	64.37	58.93	-5.44	74.00	15.07	150	50	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5456.64	48.12	-5.45	42.67	54.00	11.33	150	3	Horizontal
2	5459.89	48.45	-5.44	43.01	54.00	10.99	150	50	Horizontal


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11AC20_MCS0_5500	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 17:20:48

Test Graph

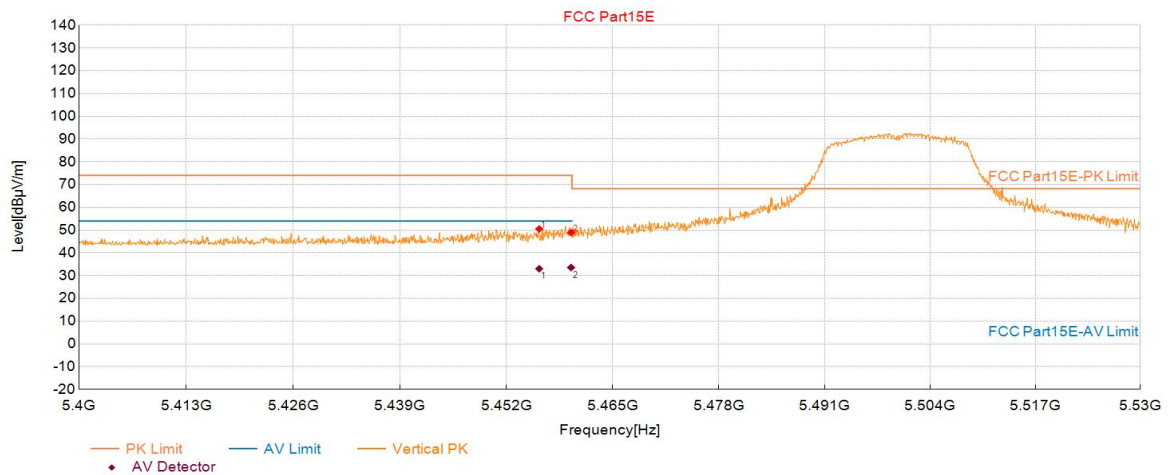

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5455.99	55.95	50.50	-5.45	74.00	23.50	150	288	Vertical
2	5459.89	54.39	48.95	-5.44	74.00	25.05	150	75	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5455.99	38.46	-5.45	33.01	54.00	20.99	150	288	Vertical
2	5459.89	38.98	-5.44	33.54	54.00	20.46	150	75	Vertical


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11AC20_MCS0_5700	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 17:25:37

Test Graph

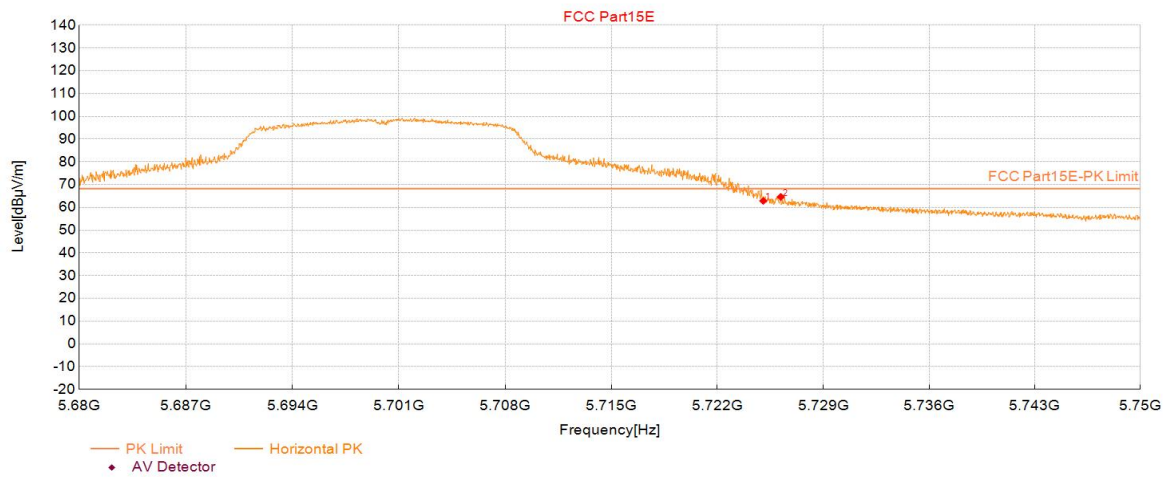

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.03	67.28	62.84	-4.44	68.20	5.36	150	36	Horizontal
2	5726.19	69.03	64.59	-4.44	68.20	3.61	150	54	Horizontal


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11AC20_MCS0_5700	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 17:27:46

Test Graph

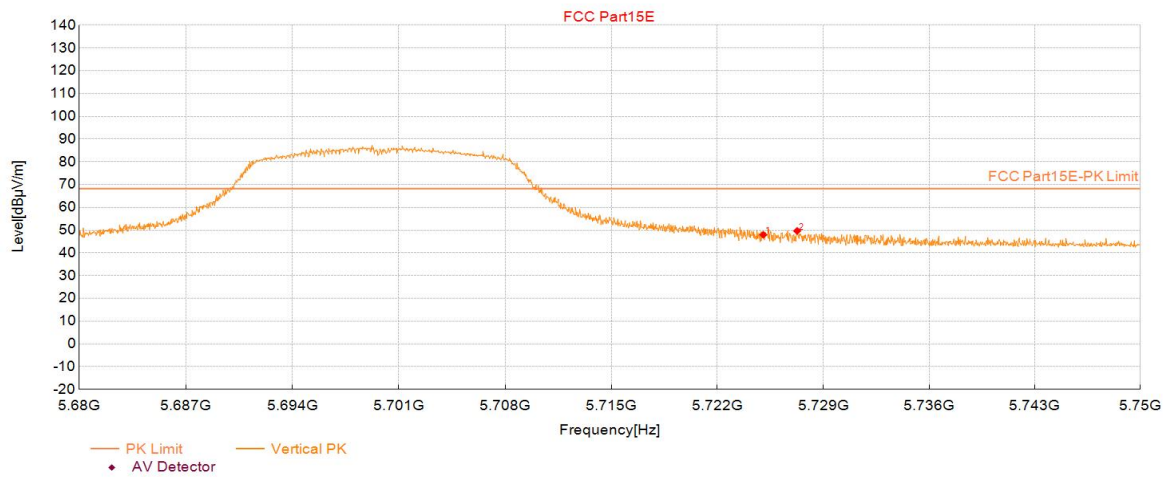

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.03	52.40	47.96	-4.44	68.20	20.24	150	74	Vertical
2	5727.27	54.09	49.65	-4.44	68.20	18.55	150	98	Vertical


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11AC20_MCS0_5745	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 17:29:40

Test Graph

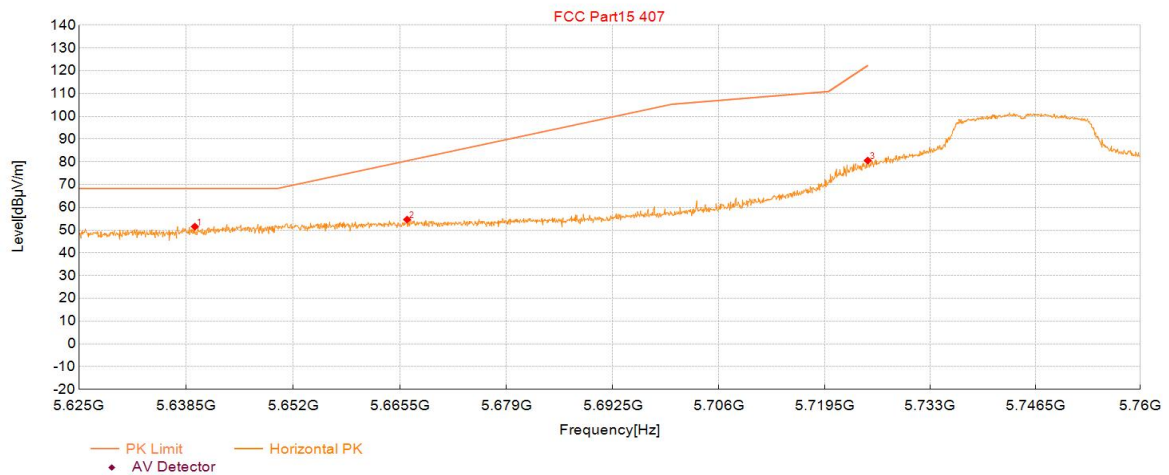

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5639.59	56.73	51.55	-5.18	68.30	16.75	150	12	Horizontal
2	5666.40	59.48	54.63	-4.85	80.47	25.84	150	12	Horizontal
3	5725.02	85.01	80.57	-4.44	-	-	150	356	Horizontal


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11AC20_MCS0_5745	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 17:30:20

Test Graph

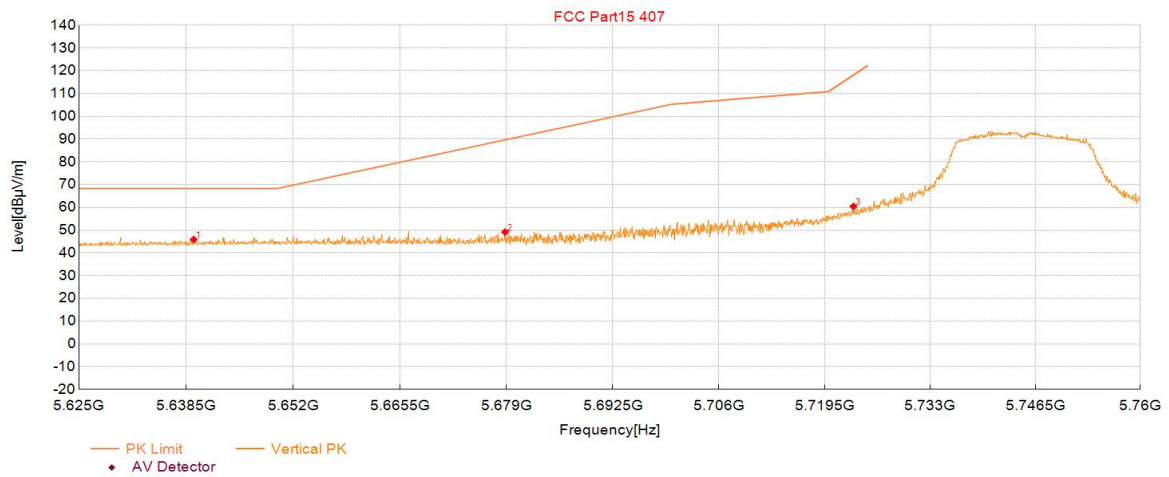

Suspected Data List

NO.	Frequency (MHz)	Reading(dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5639.45	51.07	45.89	-5.18	68.30	22.41	150	197	Vertical
2	5678.82	53.83	49.13	-4.70	89.67	40.54	150	74	Vertical
3	5723.19	64.84	60.40	-4.44	118.18	57.78	150	211	Vertical


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11AC20_MCS0_5825	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 17:36:30

Test Graph

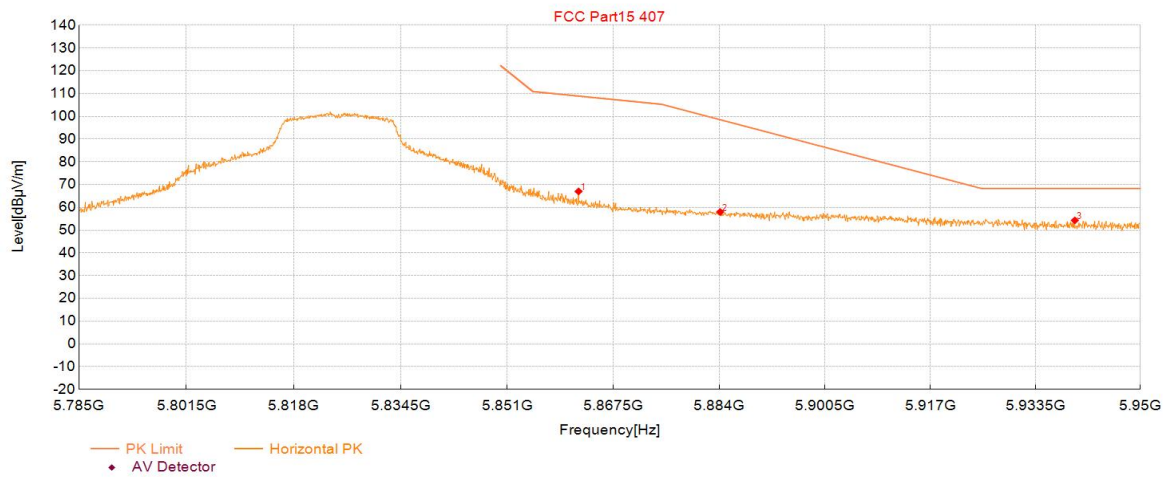

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5862.09	70.88	67.02	-3.86	108.91	41.89	150	40	Horizontal
2	5884.13	61.63	57.98	-3.65	98.52	40.54	150	45	Horizontal
3	5939.68	57.95	54.28	-3.67	68.30	14.02	150	52	Horizontal


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11AC20_MCS0_5825	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 17:37:07

Test Graph

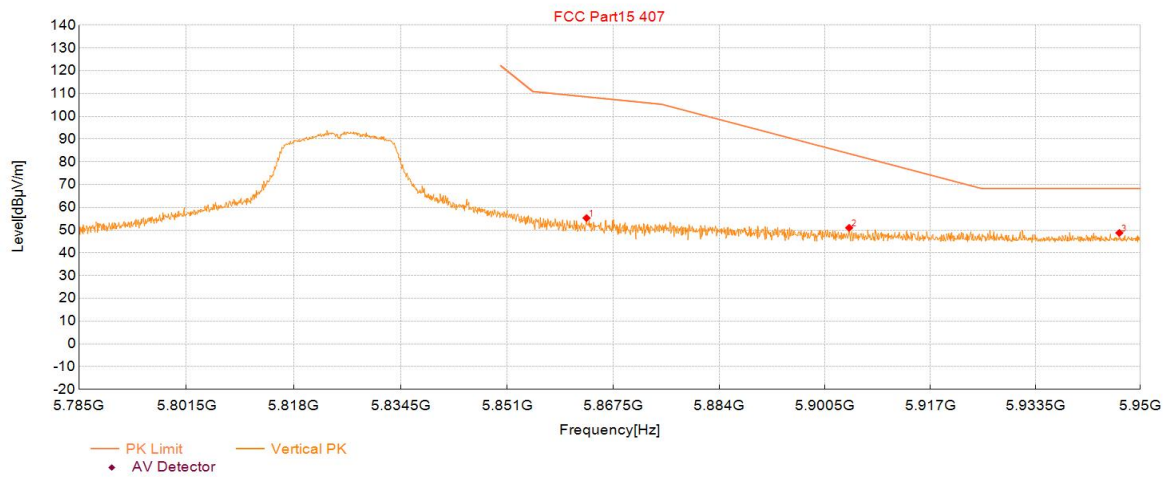

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5863.33	59.13	55.29	-3.84	108.56	53.27	150	128	Vertical
2	5904.27	54.52	51.00	-3.52	83.60	32.60	150	202	Vertical
3	5946.70	52.48	48.78	-3.70	68.30	19.52	150	207	Vertical


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11AC40_MCS0_5190	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 17:51:58

Test Graph

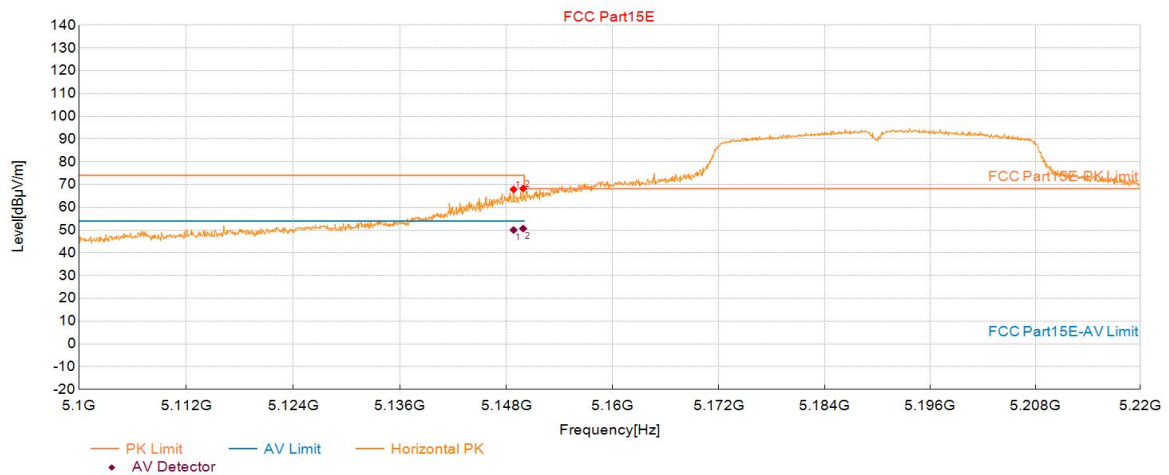

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5148.80	74.00	67.90	-6.10	74.00	6.10	150	4	Horizontal
2	5149.88	74.36	68.26	-6.10	74.00	5.74	150	22	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5148.80	56.14	-6.10	50.04	54.00	3.96	150	4	Horizontal
2	5149.88	56.77	-6.10	50.67	54.00	3.33	150	22	Horizontal


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11AC40_MCS0_5190	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 17:55:20

Test Graph

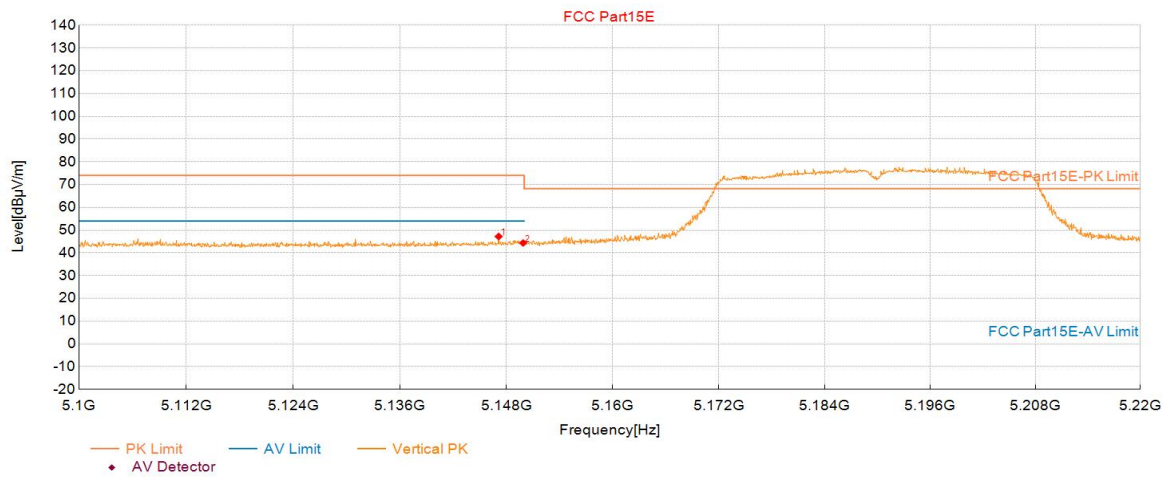

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5147.12	53.32	47.20	-6.12	74.00	26.80	150	195	Vertical
2	5149.88	50.46	44.36	-6.10	74.00	29.64	150	180	Vertical


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11AC40_MCS0_5310	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 18:39:48

Test Graph

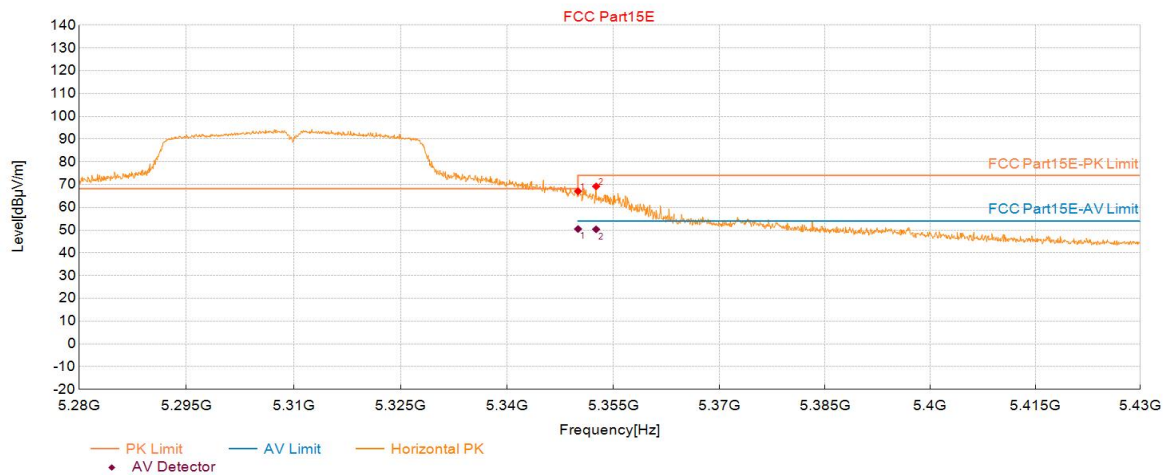

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.01	72.80	67.10	-5.70	74.00	6.90	150	0	Horizontal
2	5352.56	74.92	69.22	-5.70	74.00	4.78	150	37	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.01	56.18	-5.70	50.48	54.00	3.52	150	0	Horizontal
2	5352.56	56.03	-5.70	50.33	54.00	3.67	150	37	Horizontal


Note: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:	wifi module		
EUT:			
Model:	EL.AI8800D40-CWFT	SN:	
Mode:	11AC40_MCS0_5310	Voltage:	DC 3.3V±0.3
Environment:	25.3℃ 53%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-06-28 18:41:59

Test Graph

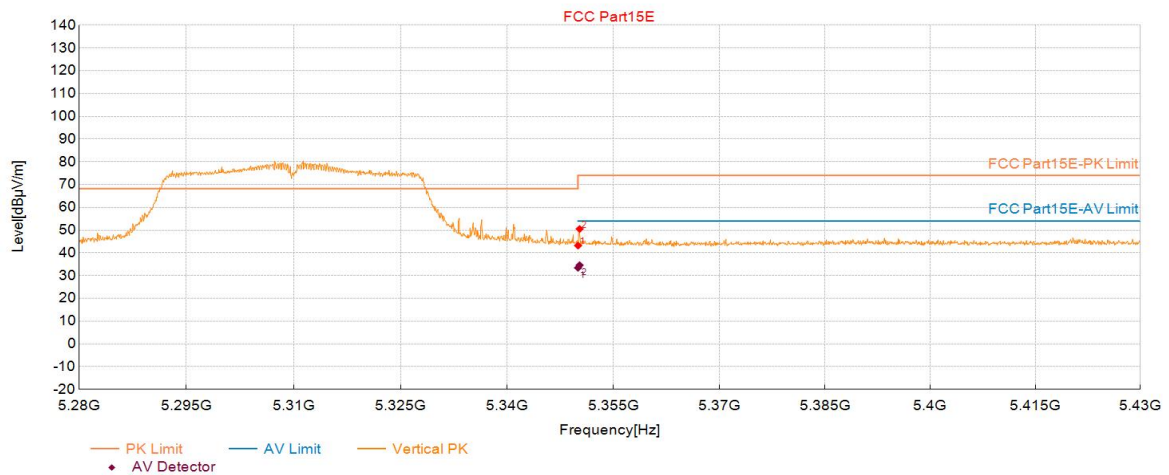

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	PK Level (dBμV/m)	Factor (dB)	PK Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.01	48.90	43.20	-5.70	74.00	30.80	150	12	Vertical
2	5350.24	56.19	50.49	-5.70	74.00	23.51	150	206	Vertical

AV Final Data List

NO.	Freq. (MHz)	Reading (dBμV/m)	Factor (dB)	AV Level (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.01	39.13	-5.70	33.43	54.00	20.57	150	12	Vertical
2	5350.24	40.29	-5.70	34.59	54.00	19.41	150	206	Vertical

Note: Level=Reading+Factor, Margin=Limit - Level