


Out of Band Emission (Conducted)

Mode	LTE Band 4			
Date	Test site	Temperature	Humidity	Engineer
June 16, 2026	SR6	23 deg. C	52 % RH	Yuta Moriya

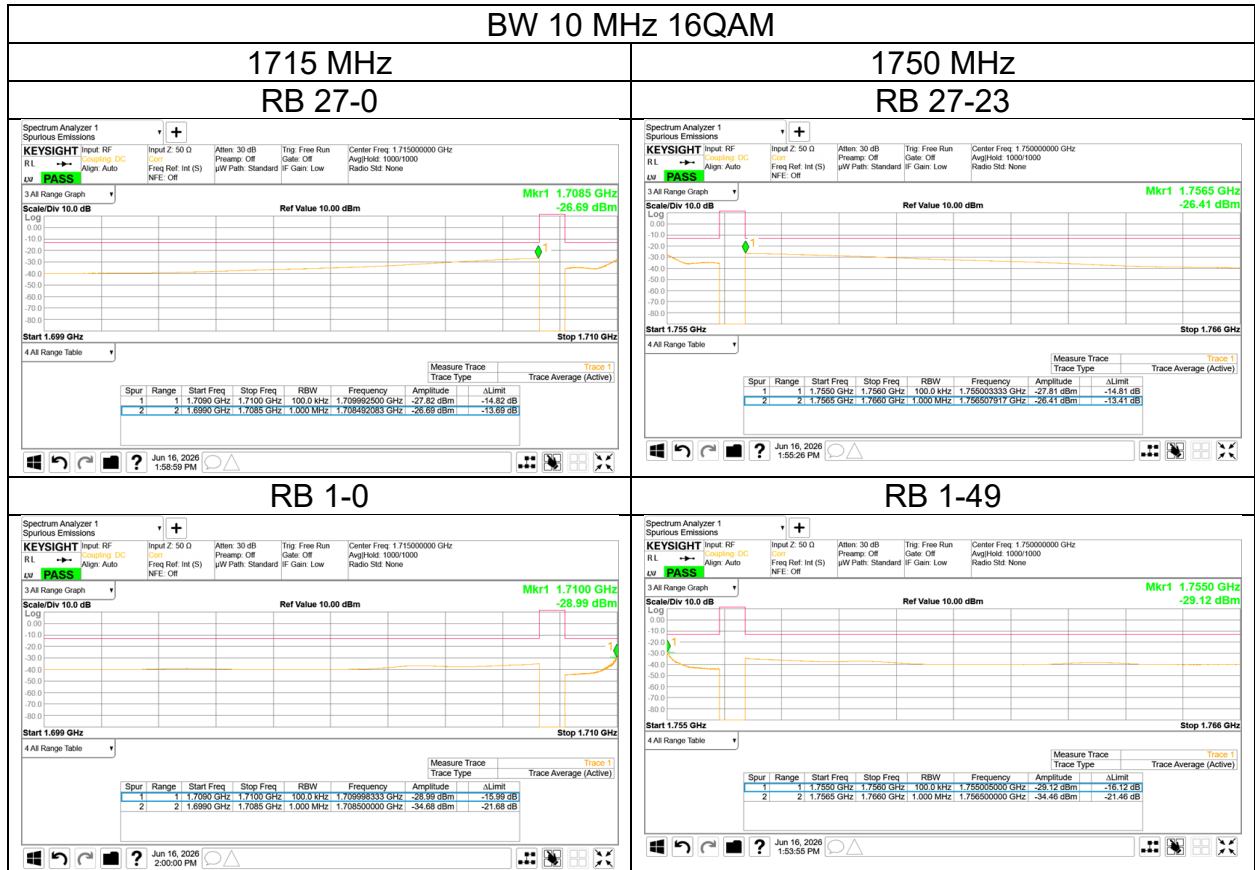


Spectrum Analyzer settings were set in the following table.

Start frequency [MHz]	Stop frequency [MHz]	RBW [kHz]	VBW [kHz]	Detector	Sweep time	Sweep points
1709	1710	100	300	Power Averaging (RMS)	Auto	1201
1755	1756					
1699	1708.5 *1)	1000	3000	Power Averaging (RMS)	Auto	1201
1756.5 *1)	1766					

*1) The frequency block/band edge was set to the start or stop frequency such that the 3 dB point of the RBW coincided with the edge frequency (the start/stop frequency was equal to the edge frequency $\pm$ RBW/2).

Out of Band Emission (Conducted)

Mode	LTE Band 4			
Date	Test site	Temperature	Humidity	Engineer
June 16, 2026	SR6	23 deg. C	52 % RH	Yuta Moriya

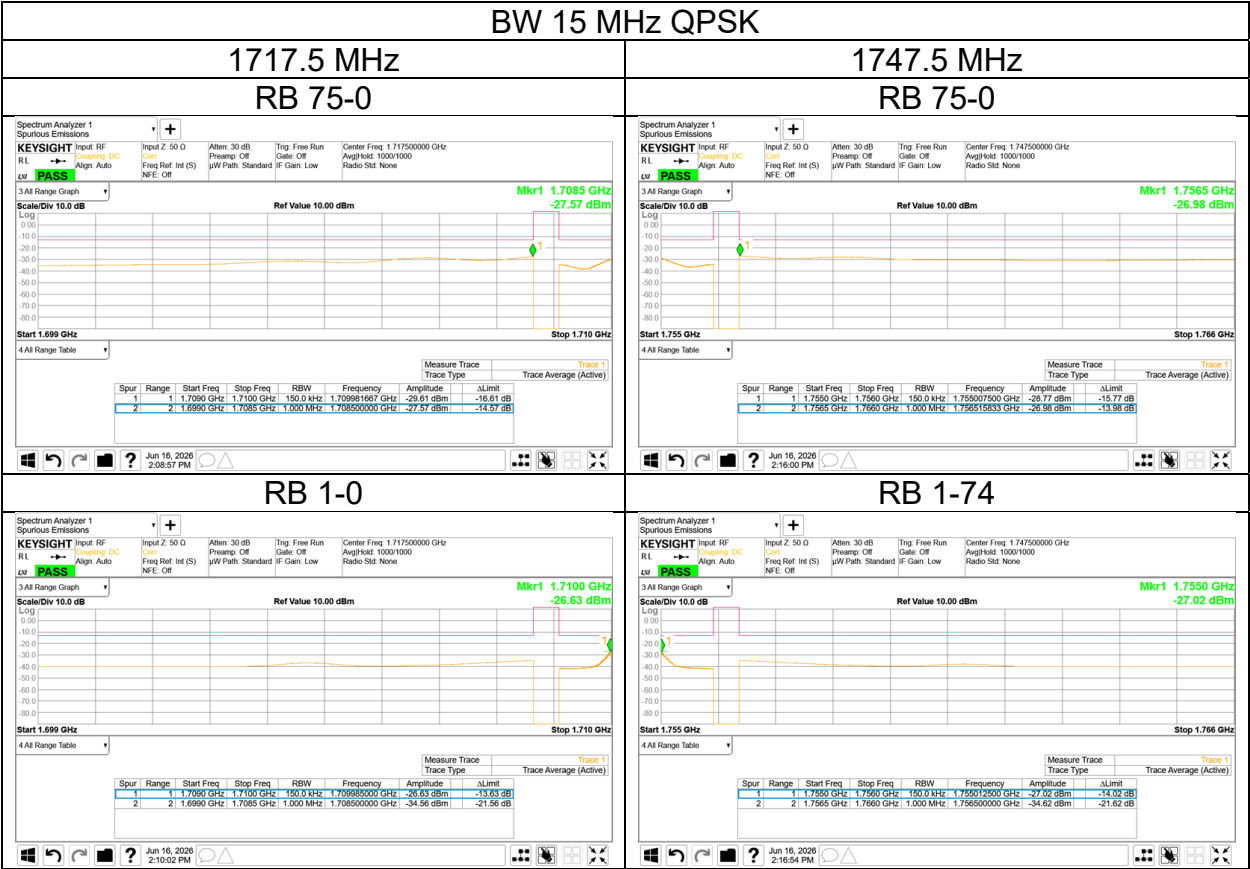


Spectrum Analyzer settings were set in the following table.

Start frequency [MHz]	Stop frequency [MHz]	RBW [kHz]	VBW [kHz]	Detector	Sweep time	Sweep points
1709	1710	150	470	Power Averaging (RMS)	Auto	1201
1755	1756					
1699	1708.5 *1)	1000	3000	Power Averaging (RMS)	Auto	1201
1756.5 *1)	1766					

*1) The frequency block/band edge was set to the start or stop frequency such that the 3 dB point of the RBW coincided with the edge frequency (the start/stop frequency was equal to the edge frequency $\pm$ RBW/2).

Out of Band Emission (Conducted)

Mode	LTE Band 4			
Date	Test site	Temperature	Humidity	Engineer
June 16, 2026	SR6	23 deg. C	52 % RH	Yuta Moriya

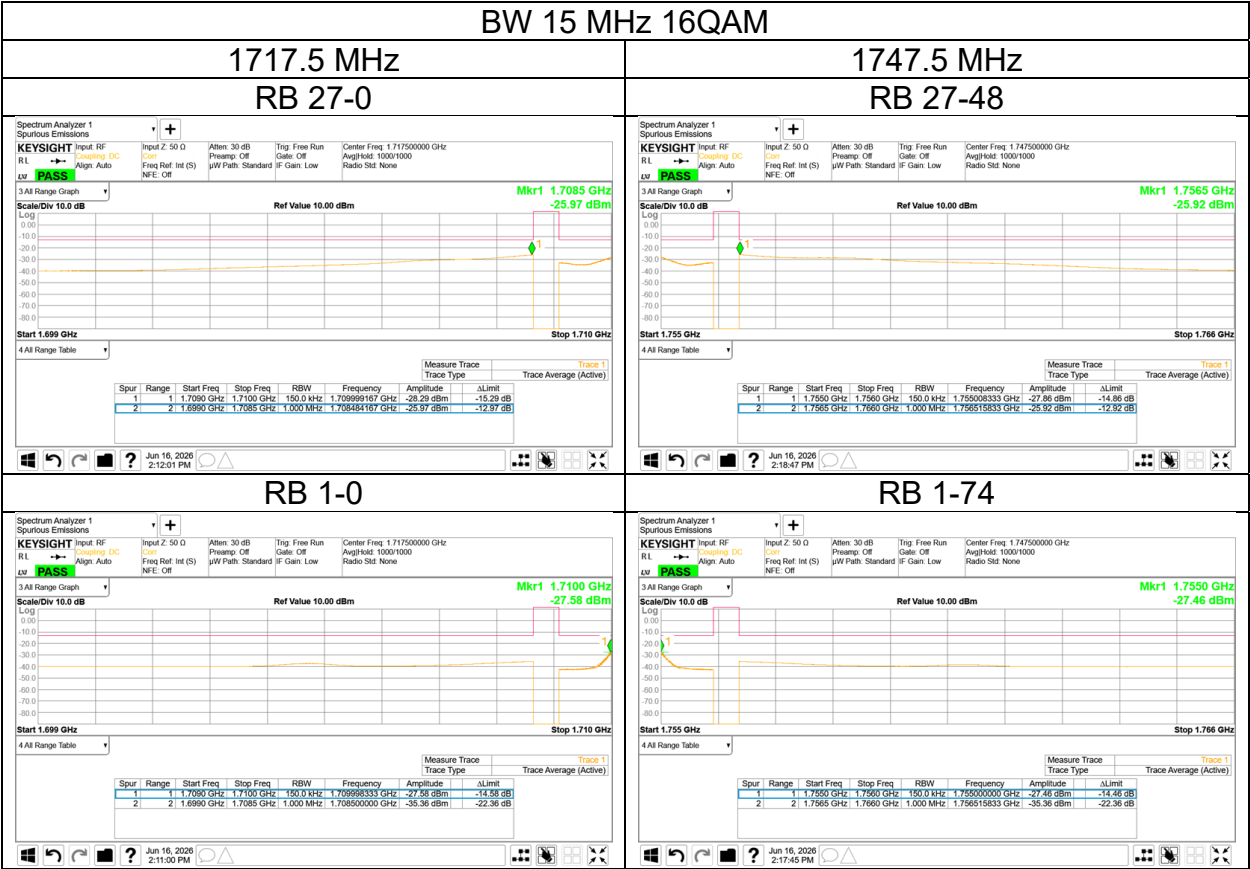


Spectrum Analyzer settings were set in the following table.

Start frequency [MHz]	Stop frequency [MHz]	RBW [kHz]	VBW [kHz]	Detector	Sweep time	Sweep points
1709	1710	150	470	Power Averaging (RMS)	Auto	1201
1755	1756					
1699	1708.5 *1)	1000	3000	Power Averaging (RMS)	Auto	1201
1756.5 *1)	1766					

*1) The frequency block/band edge was set to the start or stop frequency such that the 3 dB point of the RBW coincided with the edge frequency (the start/stop frequency was equal to the edge frequency $\pm$ RBW/2).

Out of Band Emission (Conducted)

Mode	LTE Band 4			
Date	Test site	Temperature	Humidity	Engineer
June 16, 2026	SR6	23 deg. C	52 % RH	Yuta Moriya

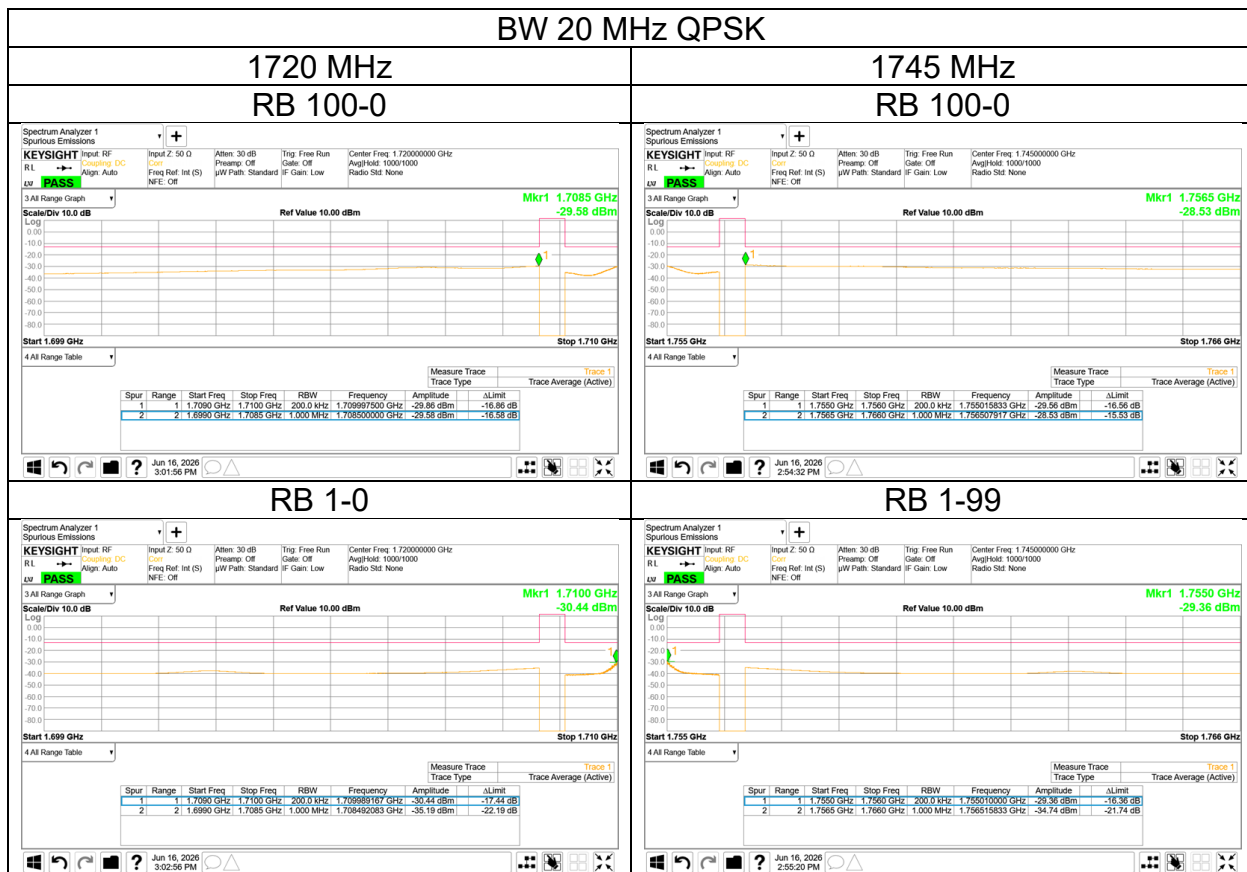


Spectrum Analyzer settings were set in the following table.

Start frequency [MHz]	Stop frequency [MHz]	RBW [kHz]	VBW [kHz]	Detector	Sweep time	Sweep points
1709	1710	200	620	Power Averaging (RMS)	Auto	1201
1755	1756					
1699	1708.5 *1)	1000	3000	Power Averaging (RMS)	Auto	1201
1756.5 *1)	1766					

*1) The frequency block/band edge was set to the start or stop frequency such that the 3 dB point of the RBW coincided with the edge frequency (the start/stop frequency was equal to the edge frequency $\pm$ RBW/2).

Out of Band Emission (Conducted)

Mode	LTE Band 4			
Date	Test site	Temperature	Humidity	Engineer
June 16, 2026	SR6	23 deg. C	52 % RH	Yuta Moriya

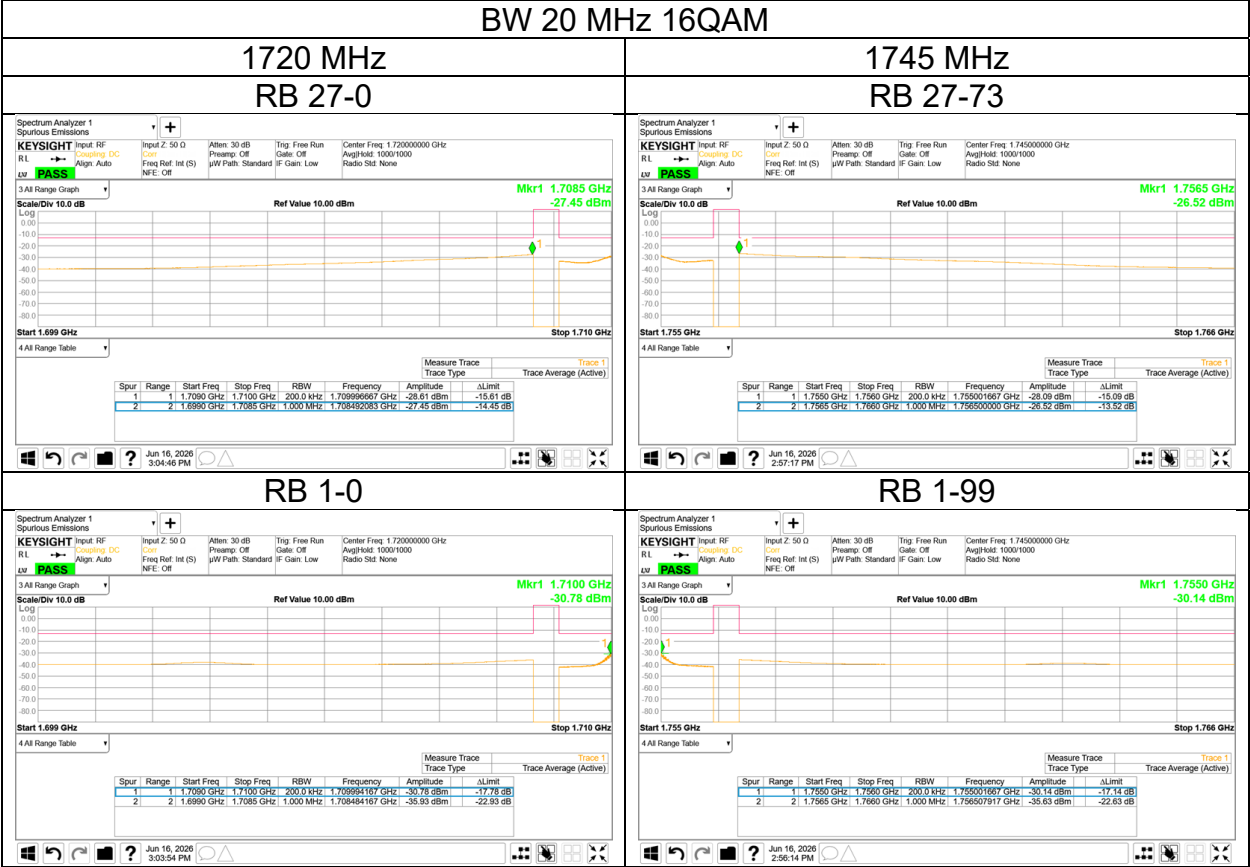


Spectrum Analyzer settings were set in the following table.

Start frequency [MHz]	Stop frequency [MHz]	RBW [kHz]	VBW [kHz]	Detector	Sweep time	Sweep points
1709	1710	200	620	Power Averaging (RMS)	Auto	1201
1755	1756					
1699	1708.5 *1)	1000	3000	Power Averaging (RMS)	Auto	1201
1756.5 *1)	1766					

Out of Band Emission (Conducted)

Mode	LTE Band 5			
Date	Test site	Temperature	Humidity	Engineer
June 11, 2026	SR6	25 deg. C	53 % RH	Takafumi Noguchi

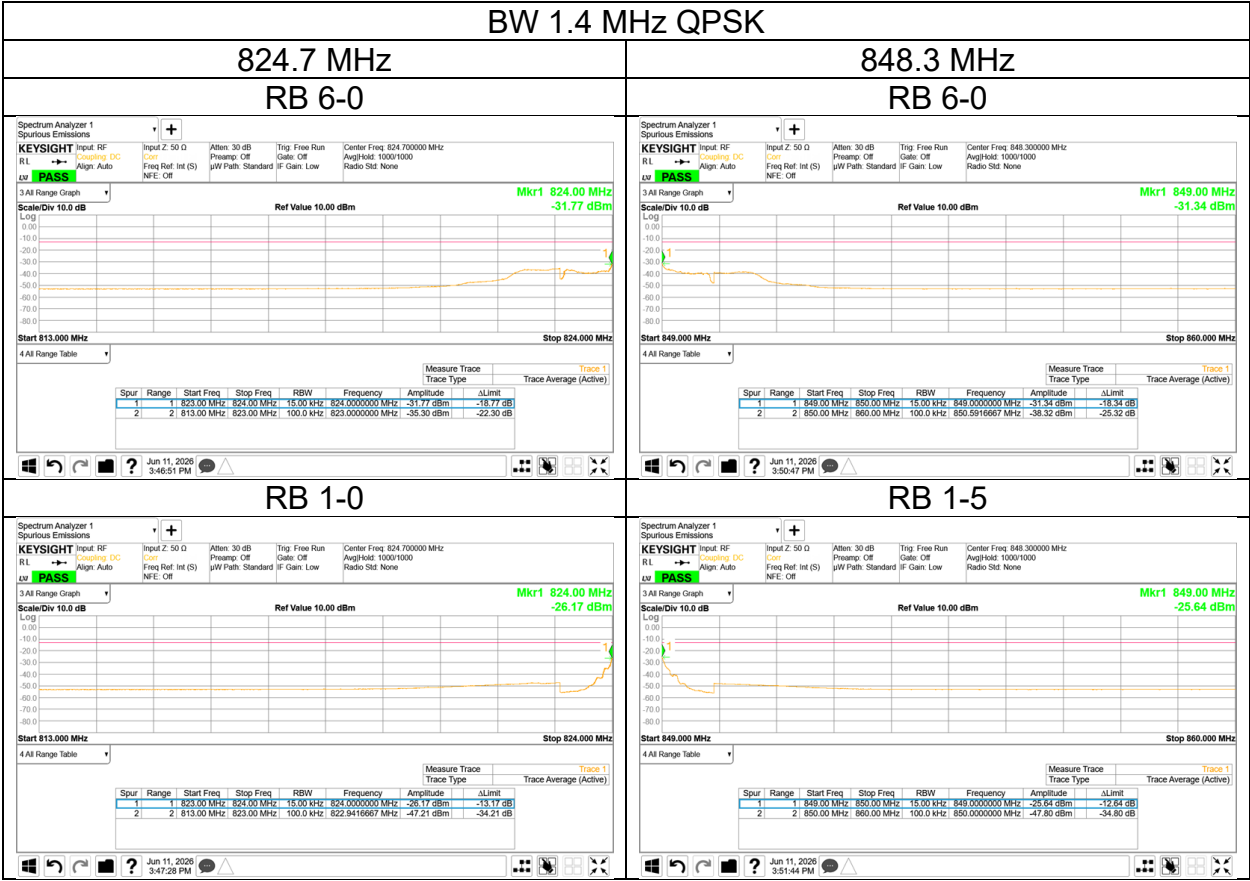


Spectrum Analyzer settings were set in the following table.

Start frequency [MHz]	Stop frequency [MHz]	RBW [kHz]	VBW [kHz]	Detector	Sweep time	Sweep points
823	824	15	47	Power Averaging (RMS)	Auto	1201
849	850					
813	823	100	300	Power Averaging (RMS)	Auto	1201
850	860					

Out of Band Emission (Conducted)

Mode	LTE Band 5			
Date	Test site	Temperature	Humidity	Engineer
June 11, 2026	SR6	25 deg. C	53 % RH	Takafumi Noguchi

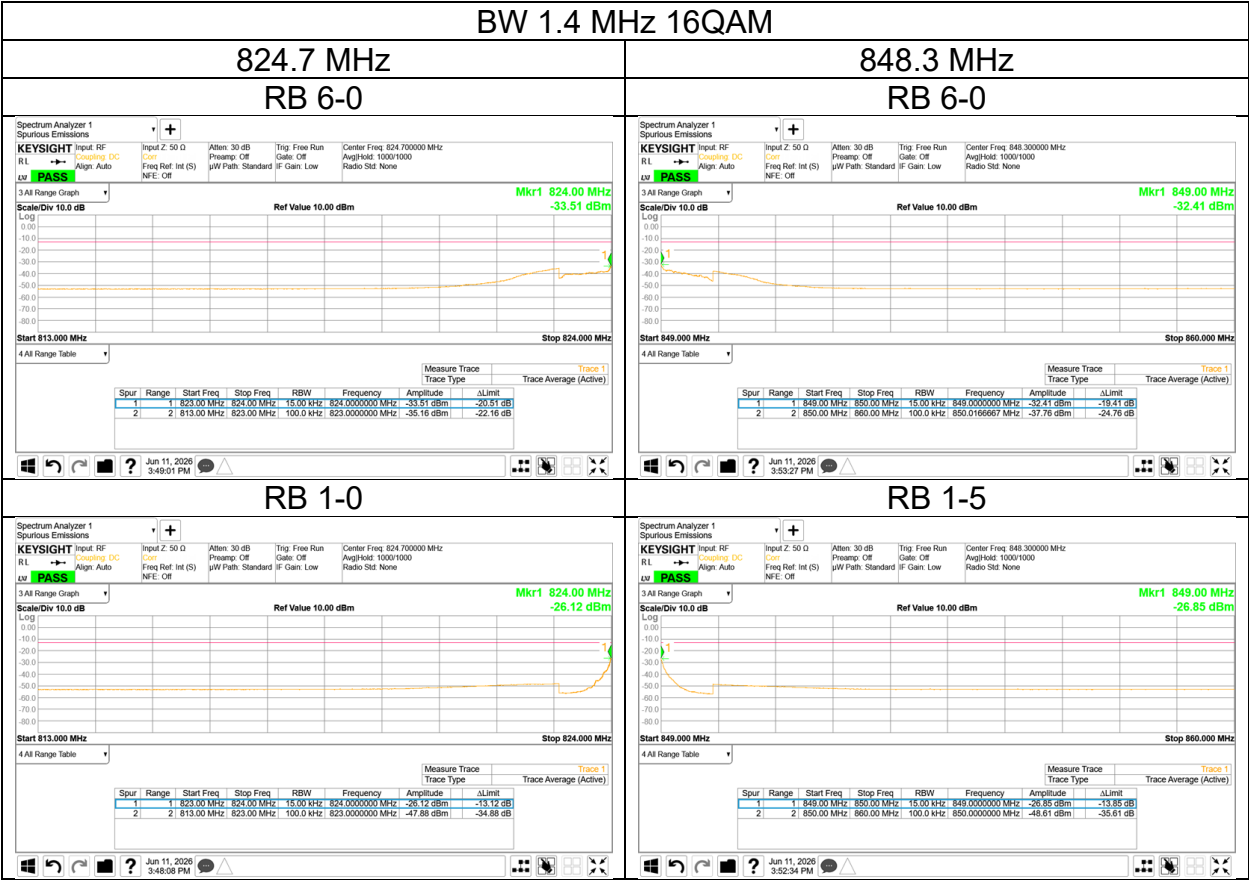


Spectrum Analyzer settings were set in the following table.

Start frequency [MHz]	Stop frequency [MHz]	RBW [kHz]	VBW [kHz]	Detector	Sweep time	Sweep points
823	824	15	47	Power Averaging (RMS)	Auto	1201
849	850					
813	823	100	300	Power Averaging (RMS)	Auto	1201
850	860					

Out of Band Emission (Conducted)

Mode	LTE Band 5			
Date	Test site	Temperature	Humidity	Engineer
June 11, 2026	SR6	25 deg. C	53 % RH	Takafumi Noguchi

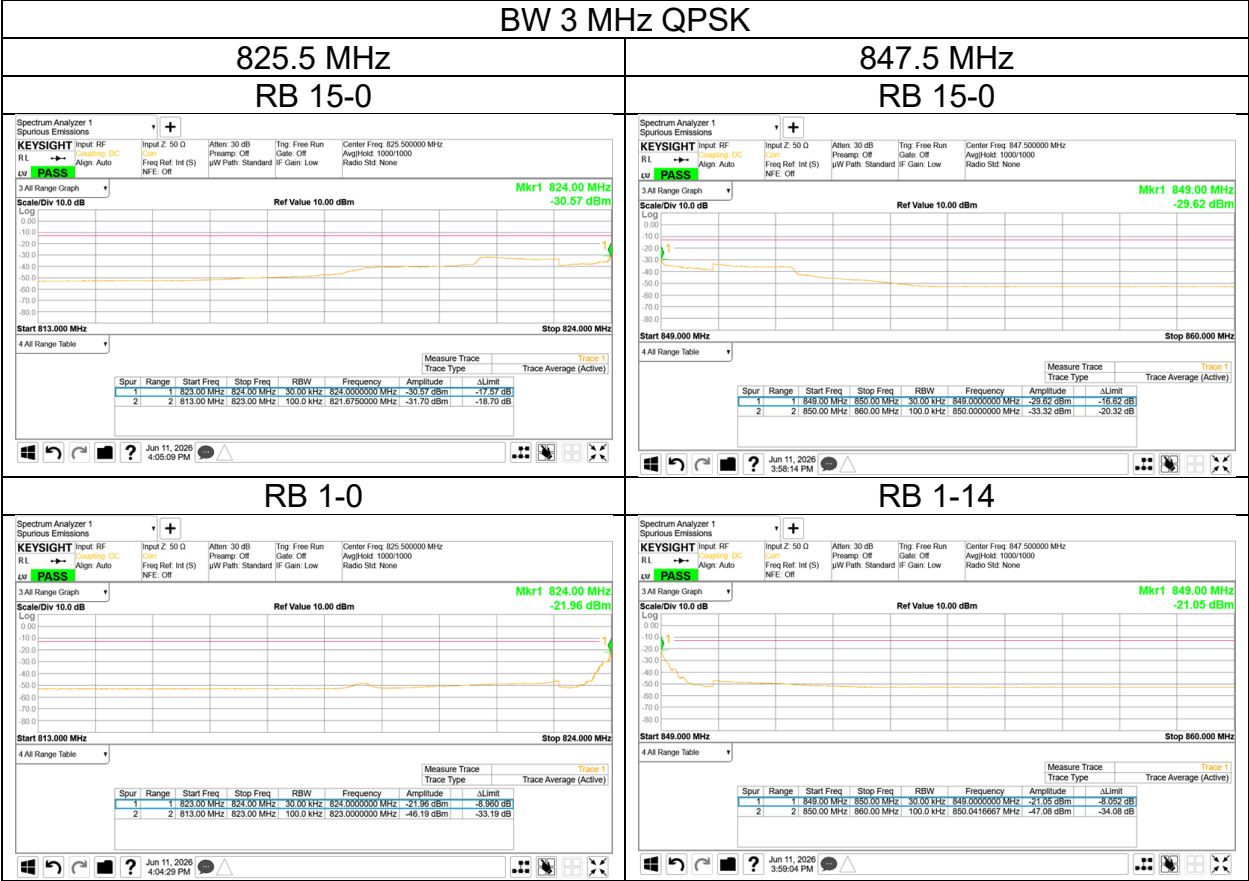


Spectrum Analyzer settings were set in the following table.

Start frequency [MHz]	Stop frequency [MHz]	RBW [kHz]	VBW [kHz]	Detector	Sweep time	Sweep points
823	824	30	91	Power Averaging (RMS)	Auto	1201
849	850					
813	823	100	300	Power Averaging (RMS)	Auto	1201
850	860					

Out of Band Emission (Conducted)

Mode	LTE Band 5			
Date	Test site	Temperature	Humidity	Engineer
June 11, 2026	SR6	25 deg. C	53 % RH	Takafumi Noguchi

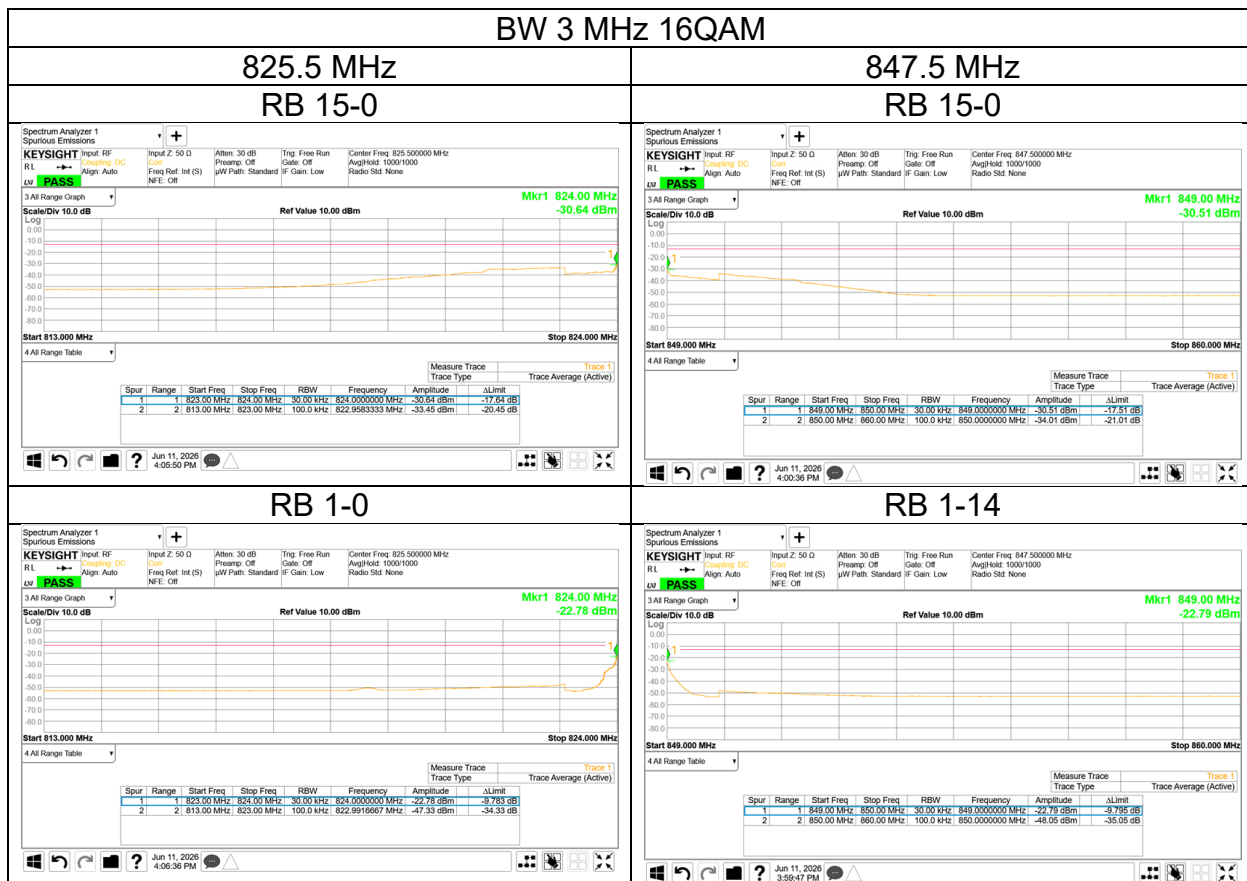


Spectrum Analyzer settings were set in the following table.

Start frequency [MHz]	Stop frequency [MHz]	RBW [kHz]	VBW [kHz]	Detector	Sweep time	Sweep points
823	824	30	91	Power Averaging (RMS)	Auto	1201
849	850					
813	823	100	300	Power Averaging (RMS)	Auto	1201
850	860					

Out of Band Emission (Conducted)

Mode	LTE Band 5				
Date	Test site	Temperature	Humidity	Engineer	
June 11, 2026	SR6	25 deg. C	53 % RH	Takafumi Noguchi	

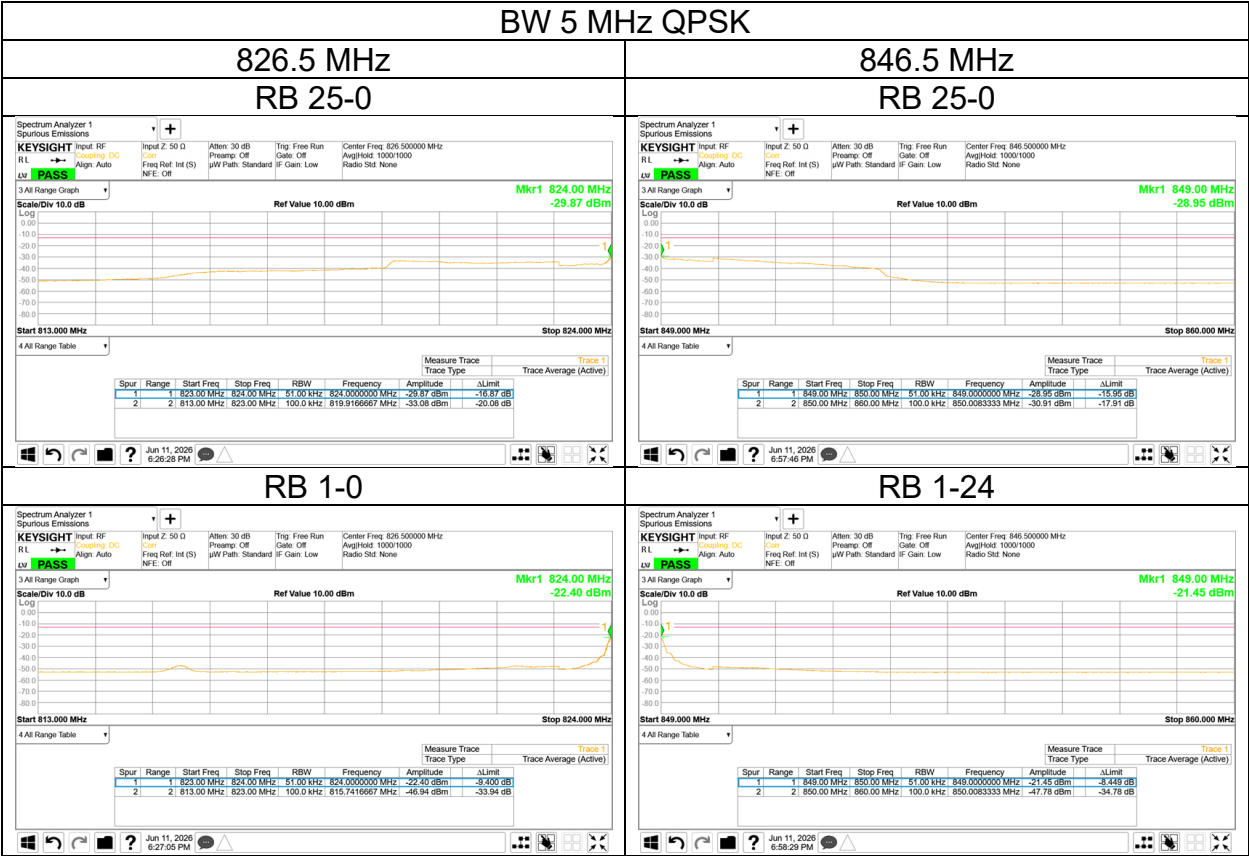


Spectrum Analyzer settings were set in the following table.

Start frequency [MHz]	Stop frequency [MHz]	RBW [kHz]	VBW [kHz]	Detector	Sweep time	Sweep points
823	824	51	160	Power Averaging (RMS)	Auto	1201
849	850					
813	823	100	300	Power Averaging (RMS)	Auto	1201
850	860					

Out of Band Emission (Conducted)

Mode	LTE Band 5			
Date	Test site	Temperature	Humidity	Engineer
June 11, 2026	SR6	25 deg. C	53 % RH	Takafumi Noguchi

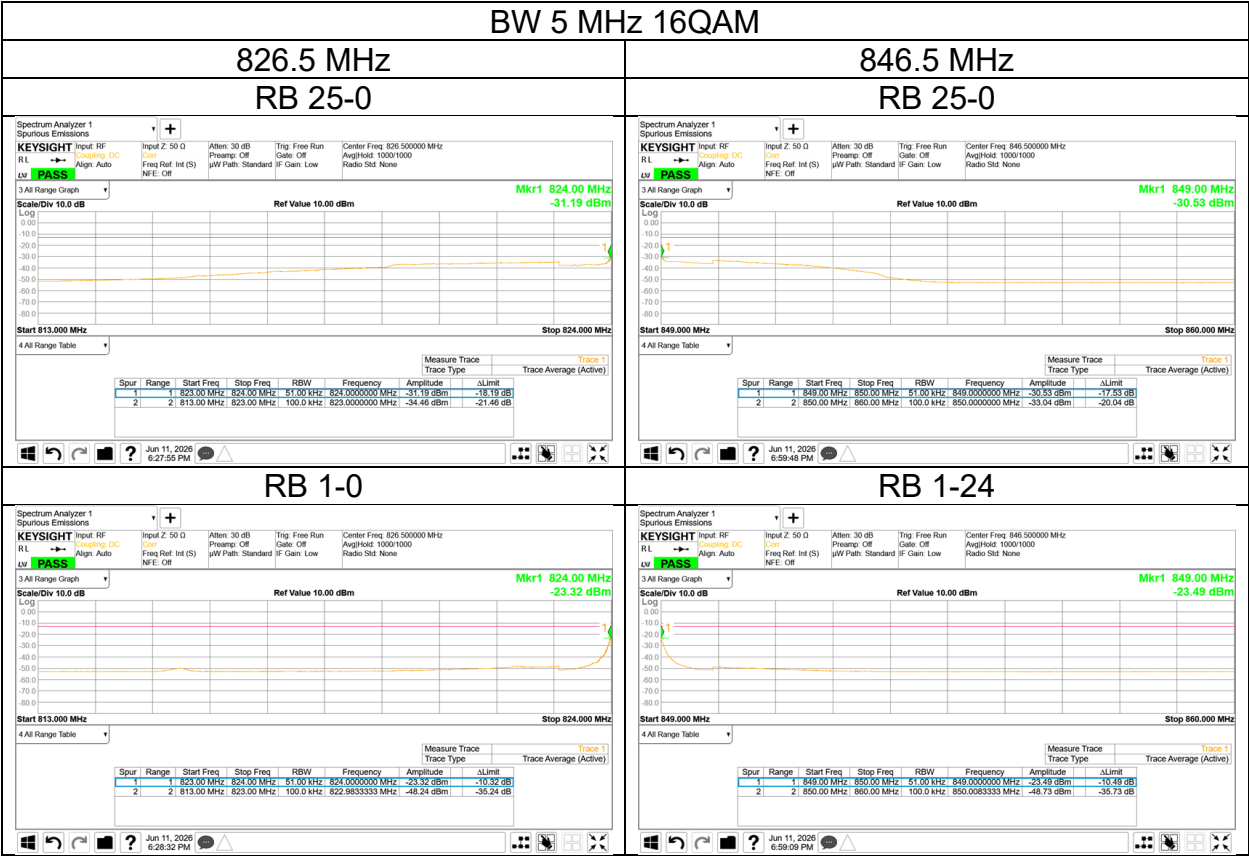


Spectrum Analyzer settings were set in the following table.

Start frequency [MHz]	Stop frequency [MHz]	RBW [kHz]	VBW [kHz]	Detector	Sweep time	Sweep points
823	824	51	160	Power Averaging (RMS)	Auto	1201
849	850					
813	823	100	300	Power Averaging (RMS)	Auto	1201
850	860					

Out of Band Emission (Conducted)

Mode	LTE Band 5			
Date	Test site	Temperature	Humidity	Engineer
June 11, 2026	SR6	25 deg. C	53 % RH	Takafumi Noguchi

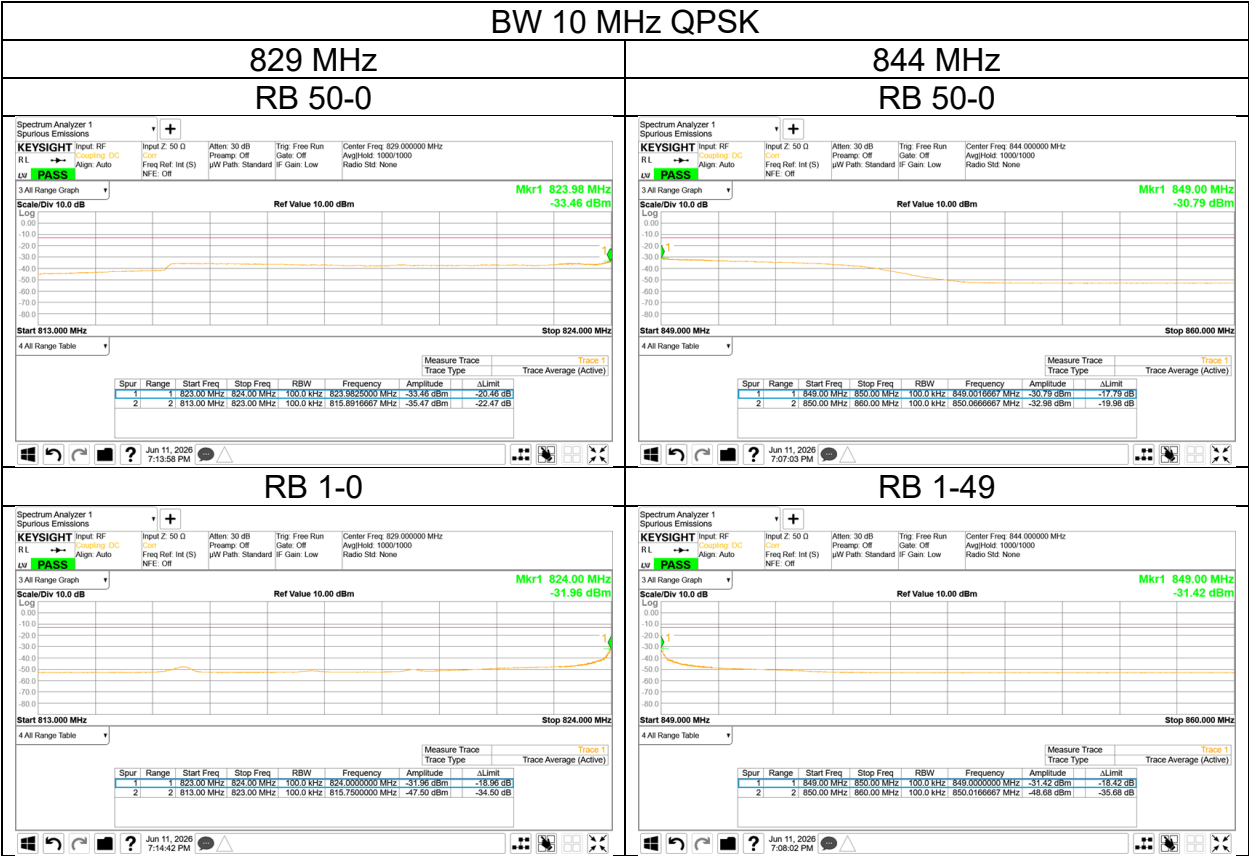


Spectrum Analyzer settings were set in the following table.

Start frequency [MHz]	Stop frequency [MHz]	RBW [kHz]	VBW [kHz]	Detector	Sweep time	Sweep points
823	824	100	300	Power Averaging (RMS)	Auto	1201
849	850					
813	823	100	300	Power Averaging (RMS)	Auto	1201
850	860					

Out of Band Emission (Conducted)

Mode	LTE Band 5			
Date	Test site	Temperature	Humidity	Engineer
June 11, 2026	SR6	25 deg. C	53 % RH	Takafumi Noguchi

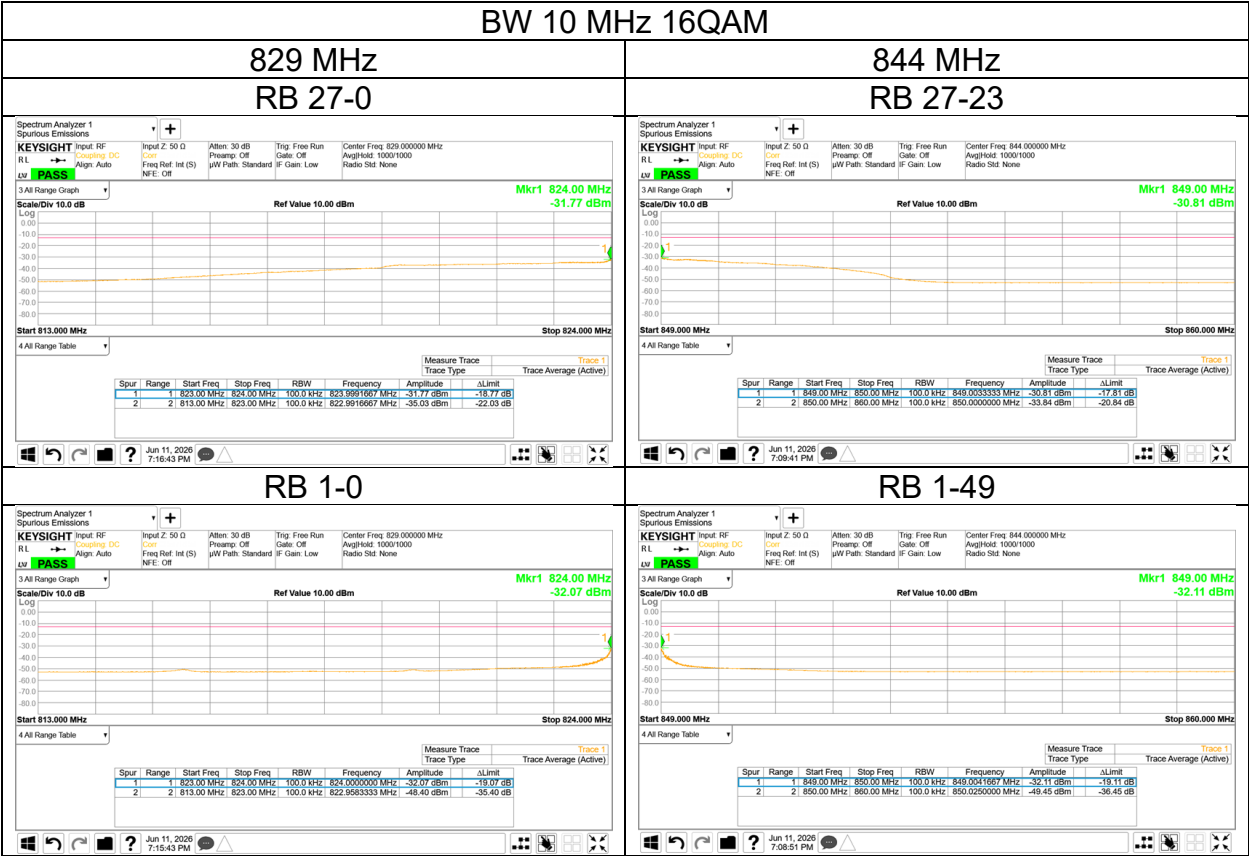


Spectrum Analyzer settings were set in the following table.

Start frequency [MHz]	Stop frequency [MHz]	RBW [kHz]	VBW [kHz]	Detector	Sweep time	Sweep points
823	824	100	300	Power Averaging (RMS)	Auto	1201
849	850					
813	823	100	300	Power Averaging (RMS)	Auto	1201
850	860					

Out of Band Emission (Conducted)

Mode	LTE Band 7			
Date	Test site	Temperature	Humidity	Engineer
June 17, 2026	SR6	24 deg. C	61 % RH	Yuta Moriya

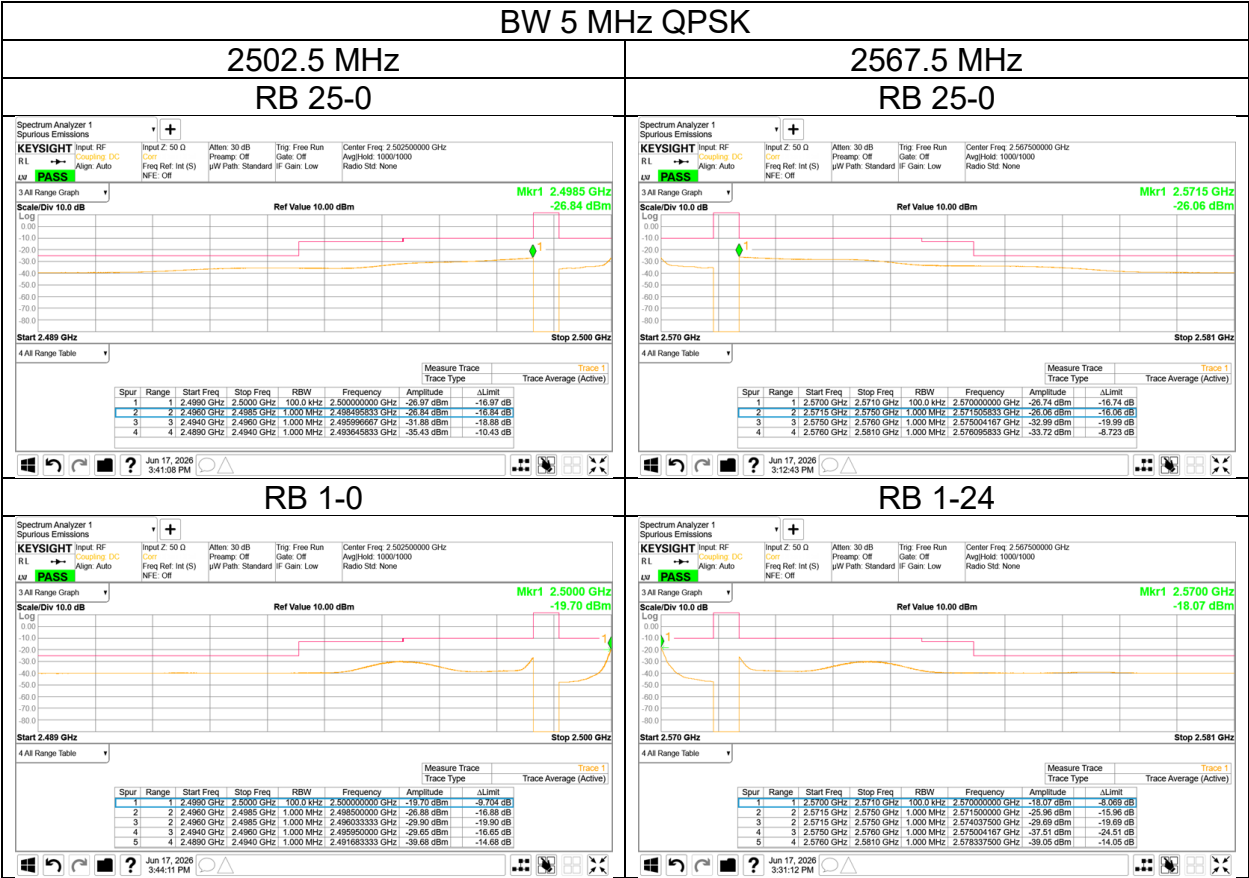


Spectrum Analyzer settings were set in the following table.

Start frequency [MHz]	Stop frequency [MHz]	RBW [kHz]	VBW [kHz]	Detector	Sweep time	Sweep points
2499	2500	100	300	Power Averaging (RMS)	Auto	1201
2570	2571					
2489	2498.5 *1)	1000	3000	Power Averaging (RMS)	Auto	1201
2571.5 *1)	2581					

*1) The frequency block/band edge was set to the start or stop frequency such that the 3 dB point of the RBW coincided with the edge frequency (the start/stop frequency was equal to the edge frequency $\pm$ RBW/2).

Out of Band Emission (Conducted)

Mode	LTE Band 7			
Date	Test site	Temperature	Humidity	Engineer
June 17, 2026	SR6	24 deg. C	61 % RH	Yuta Moriya
June 18, 2026	SR6	23 deg. C	59 % RH	Yuta Moriya

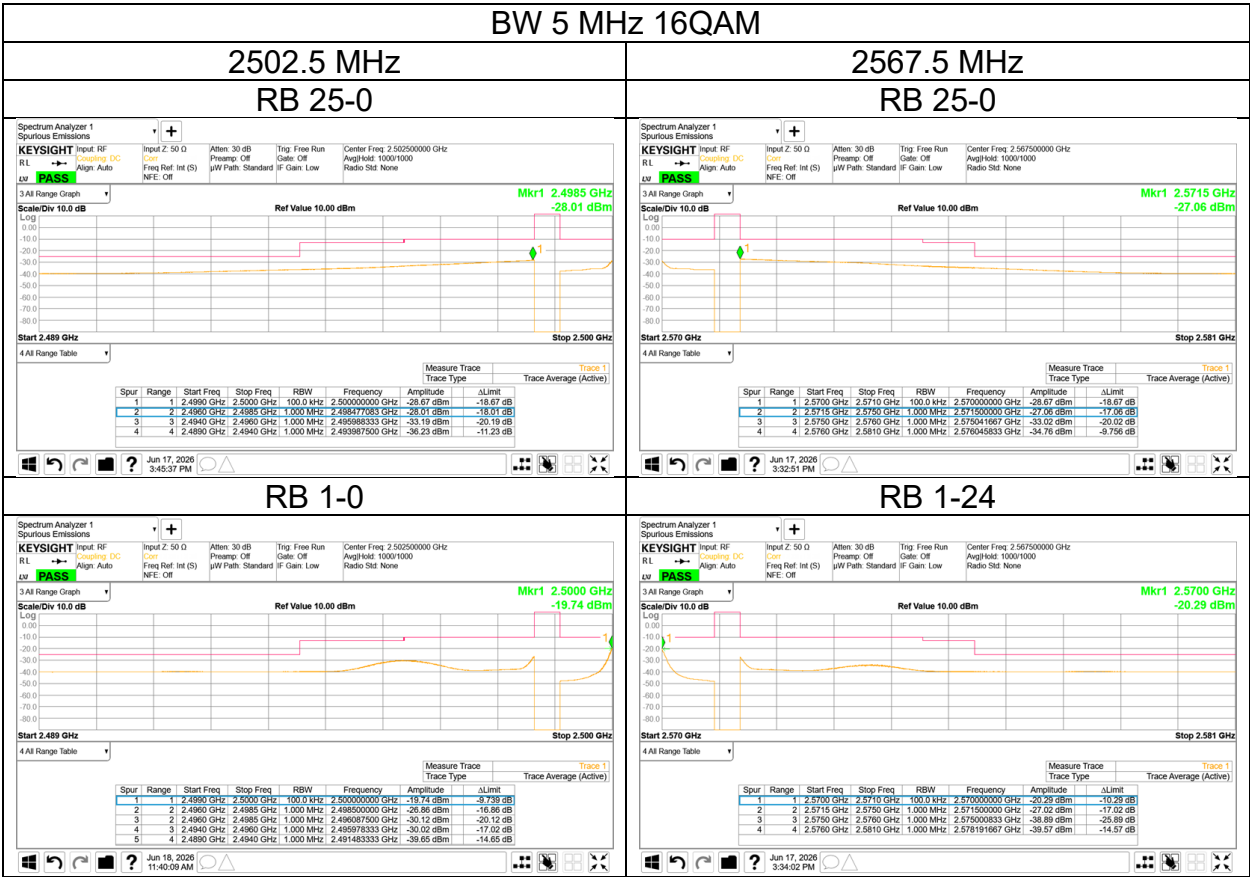


Spectrum Analyzer settings were set in the following table.

Start frequency [MHz]	Stop frequency [MHz]	RBW [kHz]	VBW [kHz]	Detector	Sweep time	Sweep points
2499	2500	100	300	Power Averaging (RMS)	Auto	1201
2570	2571					
2489	2498.5 *1)	1000	3000	Power Averaging (RMS)	Auto	1201
2571.5 *1)	2581					

*1) The frequency block/band edge was set to the start or stop frequency such that the 3 dB point of the RBW coincided with the edge frequency (the start/stop frequency was equal to the edge frequency $\pm$ RBW/2).

Out of Band Emission (Conducted)

Mode	LTE Band 7			
Date	Test site	Temperature	Humidity	Engineer
June 17, 2026	SR6	24 deg. C	61 % RH	Yuta Moriya

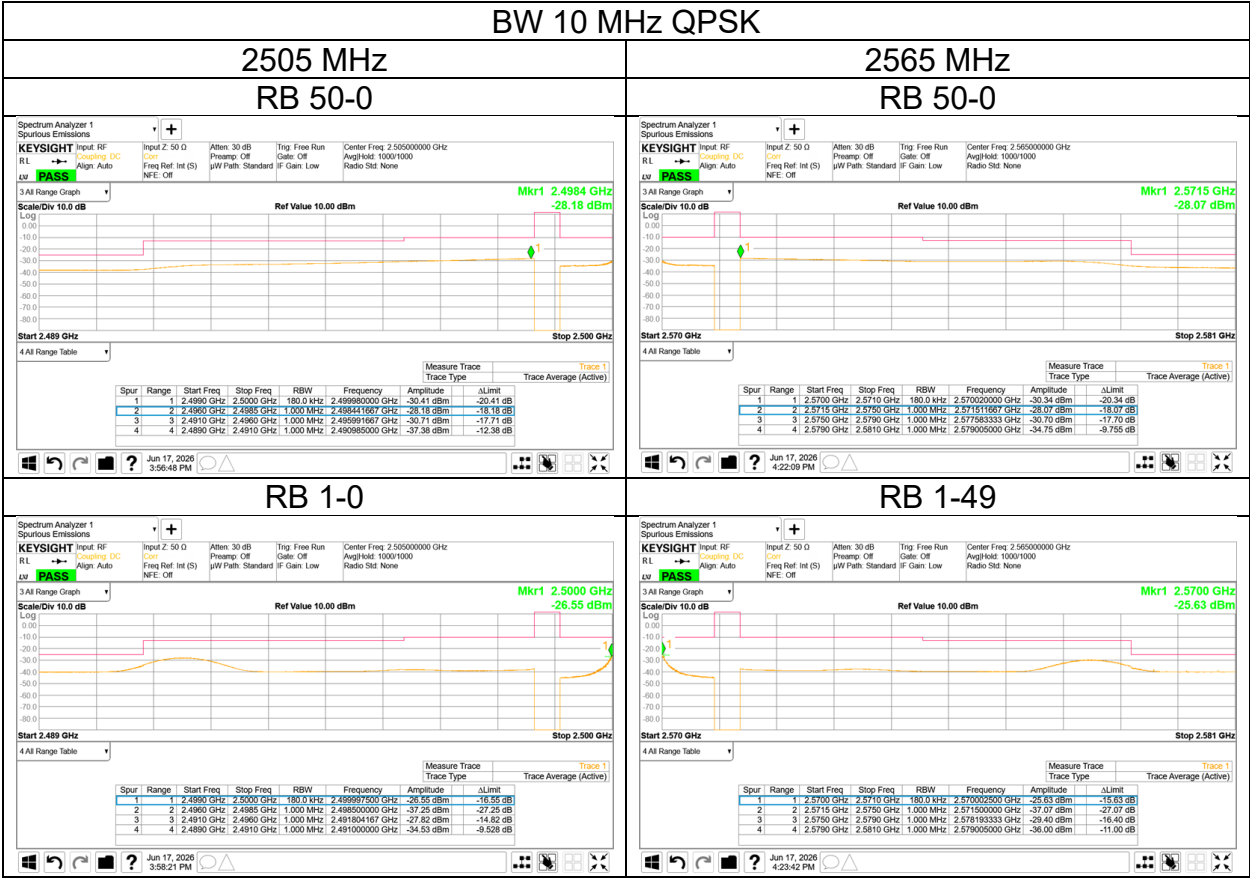

Spectrum Analyzer settings were set in the following table.

Start frequency [MHz]	Stop frequency [MHz]	RBW [kHz]	VBW [kHz]	Detector	Sweep time	Sweep points
2499	2500	100	300	Power Averaging (RMS)	Auto	1201
2570	2571					
2489	2498.5 *1)	1000	3000	Power Averaging (RMS)	Auto	1201
2571.5 *1)	2581					

*1) The frequency block/band edge was set to the start or stop frequency such that the 3 dB point of the RBW coincided with the edge frequency (the start/stop frequency was equal to the edge frequency $\pm$ RBW/2).