

SPECIFICATION

Shenzhen Strongpower Communication Co., Ltd

Shenzhen Strongpower Communication Co., Ltd.

Room 502, building W2-A, Gaoxin South Fourth Road, Nanshan District,

Shenzhen city

330 Bluetooth Aatenna SPECIFICATION

Customer	TRANSSION	Frequency Band	2402MHz-2480MHz
Model	330		
Serial No		Color	
RF designer	Zou Lijun	Structural engineer	Zhou Jun
Technical director	Fu Yicheng	Date	2023/03/10

Confirm by customer:

INDEXES


1. The equipment of Active&Passive test.....	3-4
2. Passive test..	5-6
2.1 S Parameters..	5
2.2 Passive Efficiency and Gain	5
2.3 Passive pattern.....	6
3.Active test..	6-8
3.1 TRP&TIS test.....	6
3.2 Active pattern.....	7-8
4.Matching Circuit.....	9

Confidentiality requirements


Strongpower Communication Co., Ltd. has the information provided by proprietary technology, which shall be kept strictly confidential and shall not be disclosed to any person or company without the prior written consent of Strongpower Communication Technology Co., Ltd.

1. The Equipment of Active&Passive Test


chamber

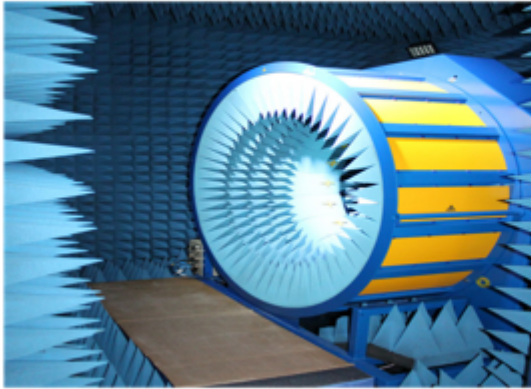


Satimo

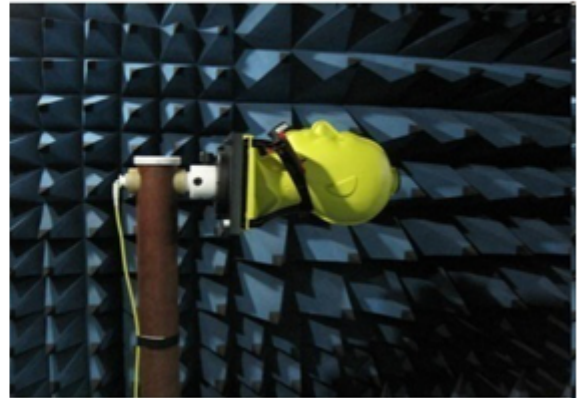

Airlink

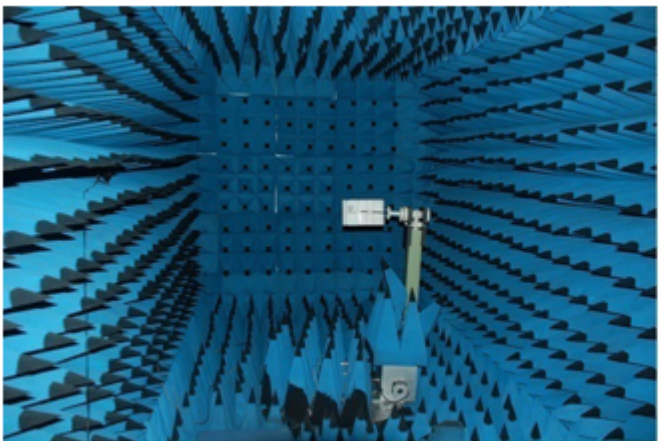

Guang Ping

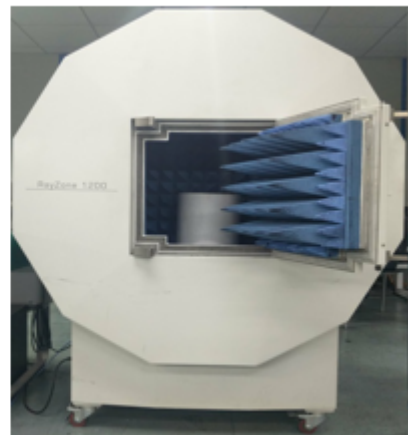

GTS


Confidentiality requirements

Strongpower Communication Co., Ltd. has the information provided by proprietary technology, which shall be kept strictly confidential and shall not be disclosed to any person or company without the prior written consent of Strongpower Communication Technology Co., Ltd.

equipment



R&S
CMW500

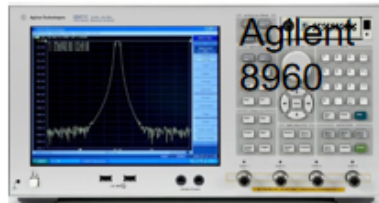

Agilent
8960



Anritsu
MT8820C



Agilent
N4010A



Agilent
E4438C
Signal
Generator



Agilent
E5071C




Confidentiality requirements

Strongpower Communication Co., Ltd. has the information provided by proprietary technology, which shall be kept strictly confidential and shall not be disclosed to any person or company without the prior written consent of Strongpower Communication Technology Co., Ltd.


2. Passive Test

2.1 S Parameters, VSWR, Return loss, Smith Chart

R

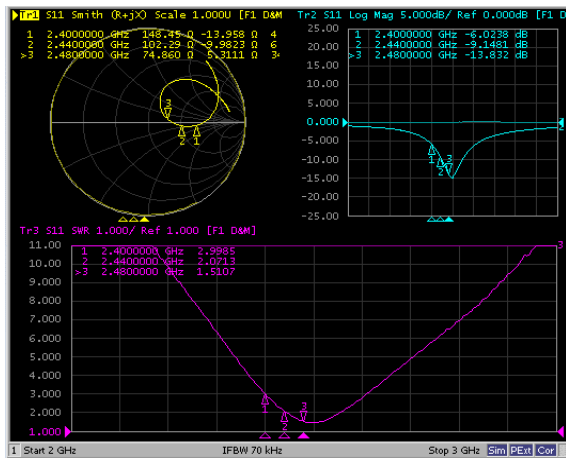

L

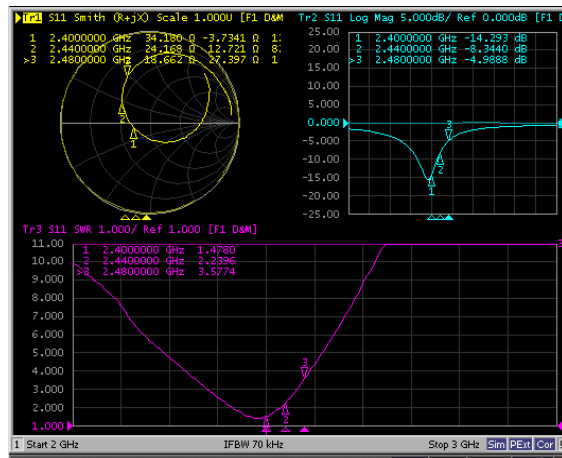

2.2 Passive Efficiency and Gain

R

Frequency (MHz)	Efficiency%	Efficiency (dB)	Gain (dBi)
2400	63%	-1.99	2.01
2410	65%	-1.90	1.81
2420	64%	-1.92	1.80
2430	64%	-1.94	1.82
2440	61%	-2.12	1.59
2450	65%	-1.90	2.07
2460	67%	-1.74	2.16
2470	61%	-2.14	1.80
2480	66%	-1.83	2.06

L

Frequency (MHz)	Efficiency %	Efficiency (dB)	Gain (dBi)
2400	48%	-3.17	0.04
2410	53%	-2.78	0.69
2420	53%	-2.75	0.50
2430	54%	-2.66	0.74
2440	53%	-2.74	0.79

Confidentiality requirements

Strongpower Communication Co., Ltd. has the information provided by proprietary technology, which shall be kept strictly confidential and shall not be disclosed to any person or company without the prior written consent of Strongpower Communication Technology Co., Ltd.


Confidential Information

2450	56%	-2.52	1.09
2460	58%	-2.34	1.23
2470	54%	-2.64	0.72
2480	56%	-2.48	1.06
average value	54.08%	-2.67	0.76

2.3 Passive pattern

R

L

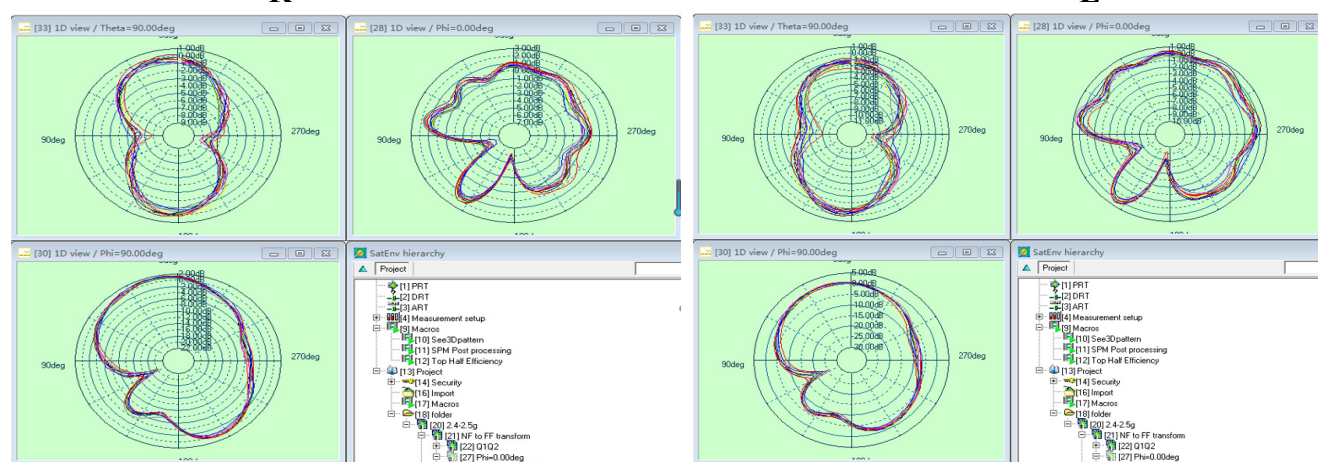

Theta=90

Phi=0°

Phi=90°

3.Active test

3.1 TRP&TIS

FS-R

信道 CH	TRP (dBm)	TIS (dBm)
0	7.25	-89.26
39	6.39	-88.78
78	6.57	-88.86

HR

信道 CH	TRP (dBm)	TIS (dBm)
0	0.44	-83.87
39	0.66	-83.41
78	-0.53	-82.37

Confidentiality requirements

Strongpower Communication Co., Ltd. has the information provided by proprietary technology, which shall be kept strictly confidential and shall not be disclosed to any person or company without the prior written consent of Strongpower Communication Technology Co., Ltd.

FS-L

信道 CH	TRP (dBm)	TIS (dBm)
0	7.93	-89.79
39	7.68	-88.74
78	6.49	-88.38


HL

信道 CH	TRP (dBm)	TIS (dBm)
0	-1.96	-82.16
39	-0.93	-81.28
78	-2.36	-80.86

3.2 Active pattern

Left


FS-L

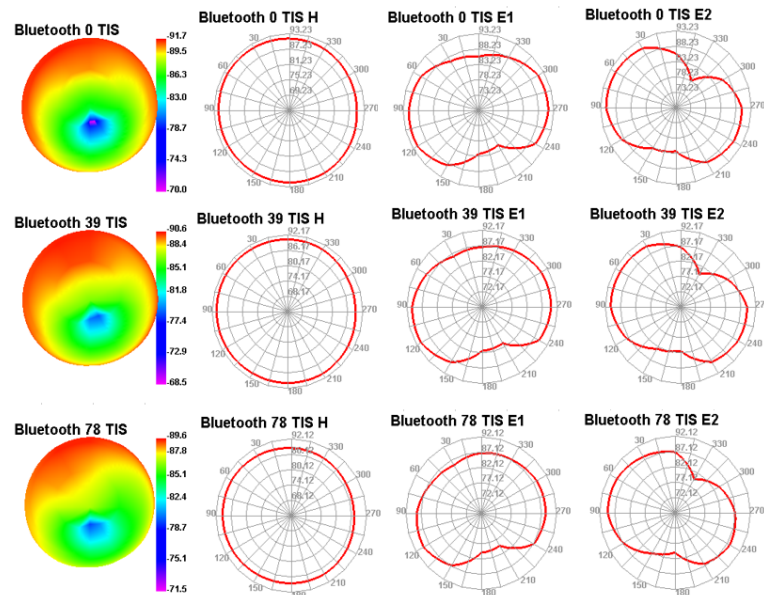


Confidentiality requirements

Strongpower Communication Co., Ltd. has the information provided by proprietary technology, which shall be kept strictly confidential and shall not be disclosed to any person or company without the prior written consent of Strongpower Communication Technology Co., Ltd.

HL

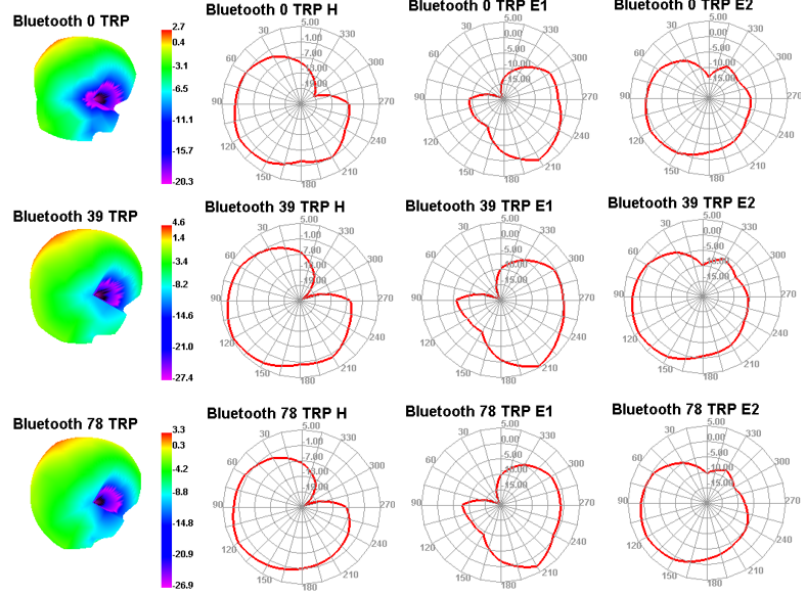


FS-R

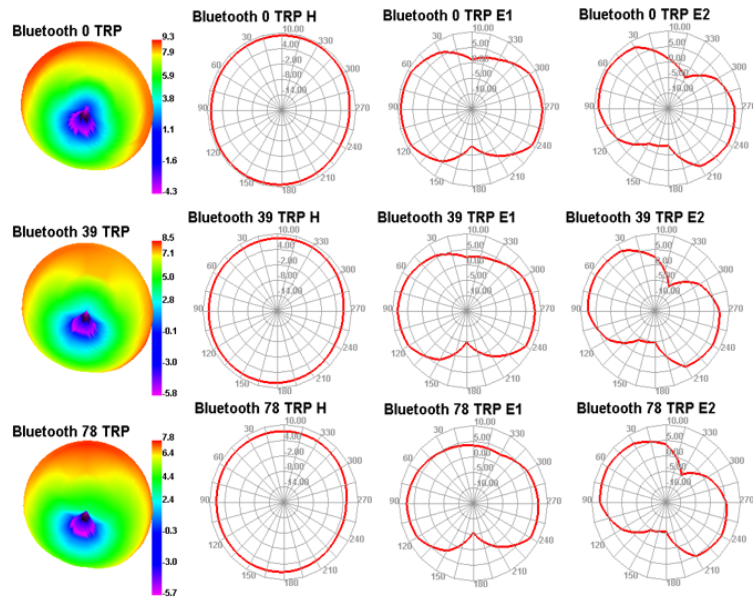

Confidentiality requirements

Strongpower Communication Co., Ltd. has the information provided by proprietary technology, which shall be kept strictly confidential and shall not be disclosed to any person or company without the prior written consent of Strongpower Communication Technology Co., Ltd.


HR

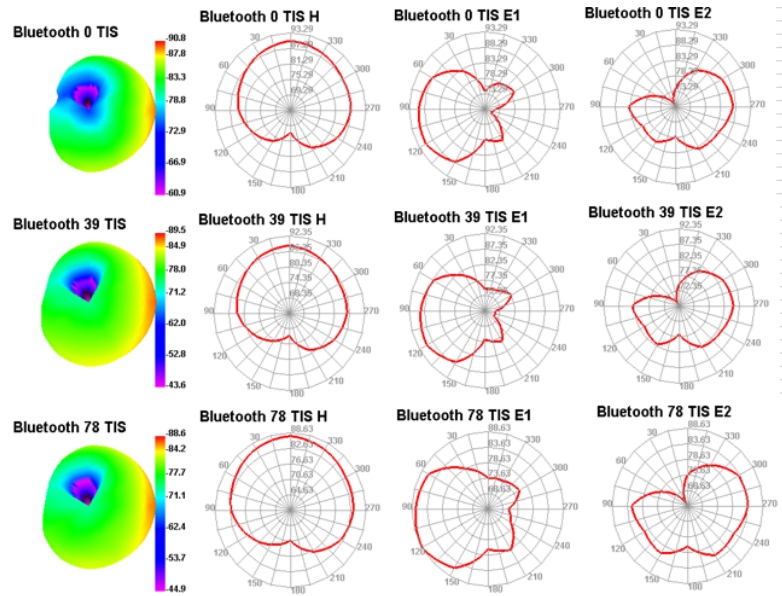

4. Matching Circuit


Left&Right are the same

Element	E1	E2	E3
Value	NC	0 Ω	NC

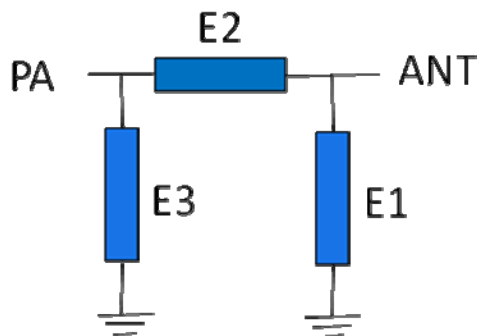

Confidentiality requirements

Strongpower Communication Co., Ltd. has the information provided by proprietary technology, which shall be kept strictly confidential and shall not be disclosed to any person or company without the prior written consent of Strongpower Communication Technology Co., Ltd.

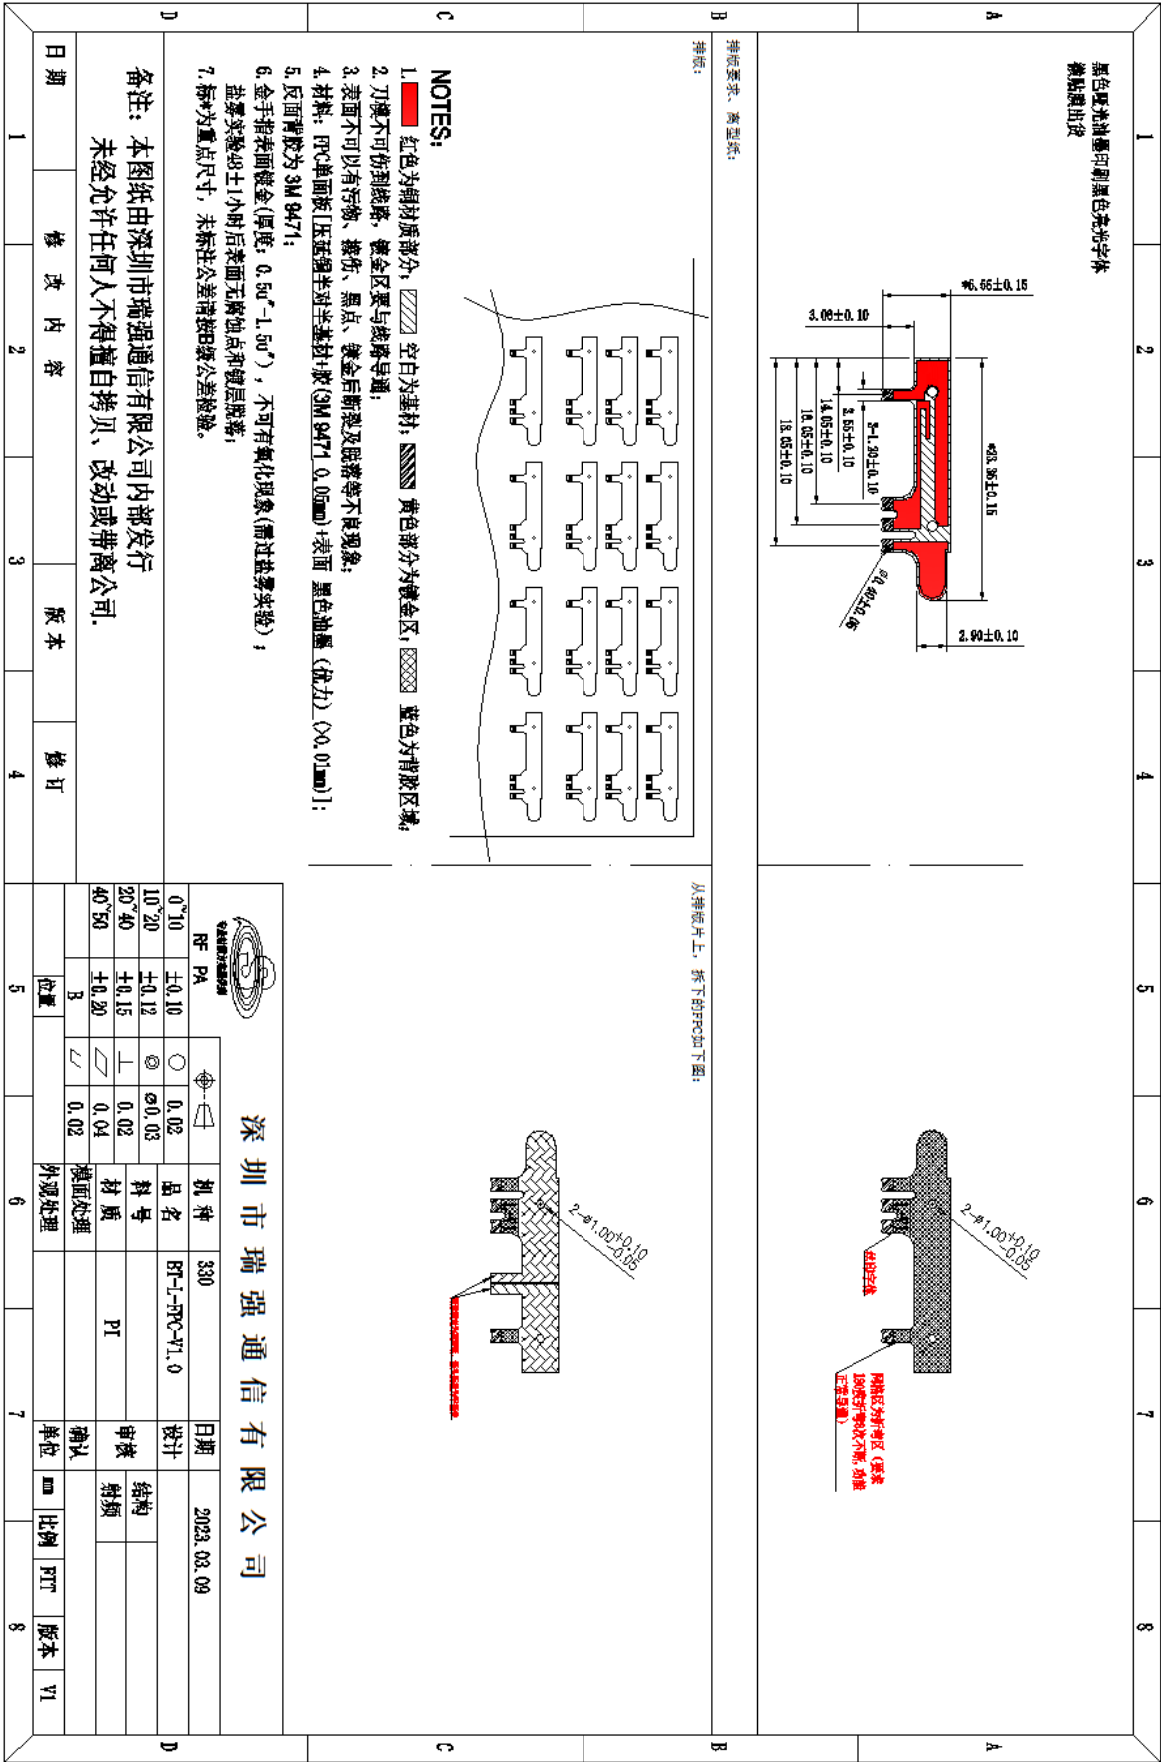

Confidentiality requirements

Strongpower Communication Co., Ltd. has the information provided by proprietary technology, which shall be kept strictly confidential and shall not be disclosed to any person or company without the prior written consent of Strongpower Communication Technology Co., Ltd.

Strongpower Communication Co., Ltd. has the information provided by proprietary technology, which shall be kept strictly confidential and shall not be disclosed to any person or company without the prior written consent of Strongpower Communication Technology Co., Ltd.