




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,273.000	106.04			16.36	V	97.7	2.00
3	5,350.000	54.62	74.00	19.38	16.73	V	200.9	2.00
3	5,356.967	55.87	74.00	18.13	16.78	V	97.7	2.00



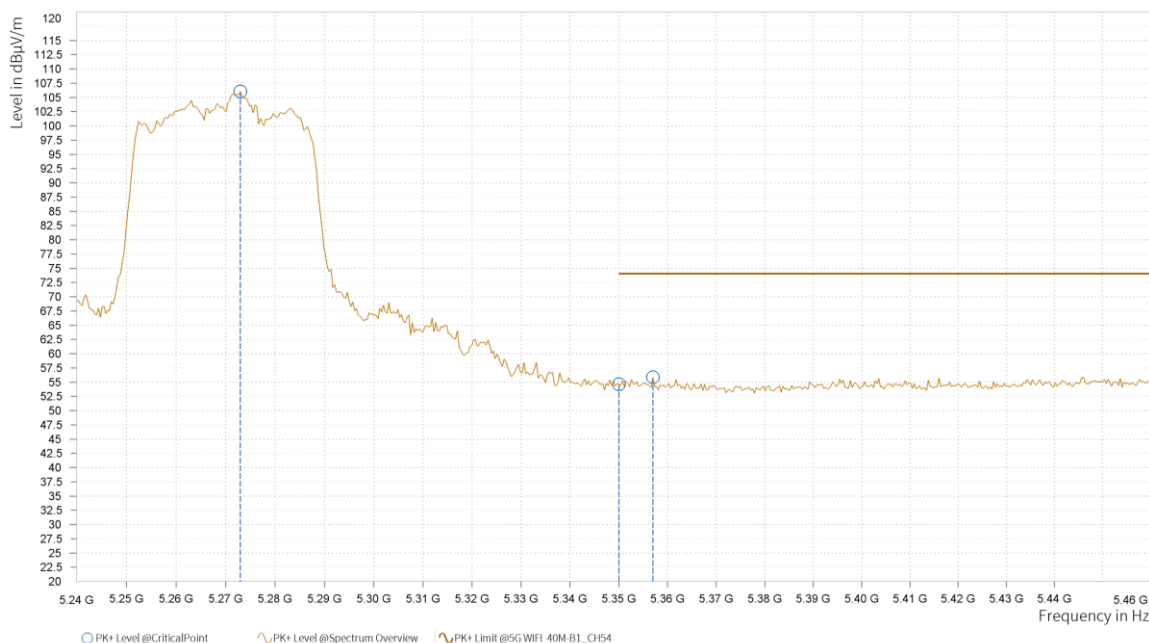


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,271.167	94.49			16.36	V	359	1.00
3	5,350.000	41.64	54.00	12.36	16.73	V	359	1.00
3	5,354.033	41.93	54.00	12.07	16.76	V	98.2	2.00



REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5270MHz: Fundamental frequency.

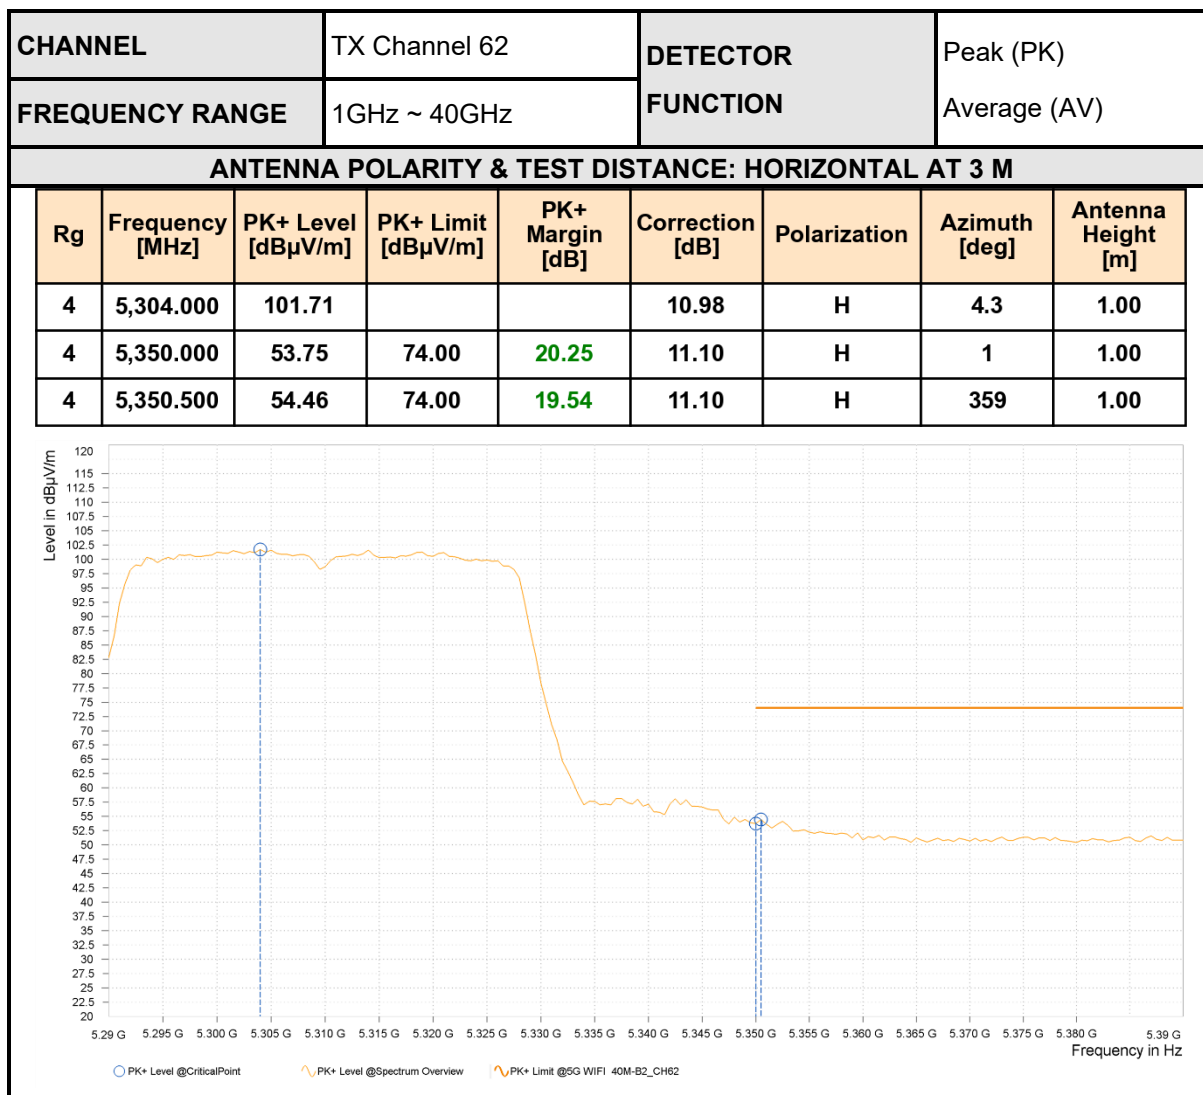



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,317.500	90.88			11.02	H	117.6	1.00
4	5,350.000	40.25	54.00	13.75	11.10	H	117.6	1.00
4	5,351.000	39.95	54.00	14.05	11.10	H	117.6	1.00

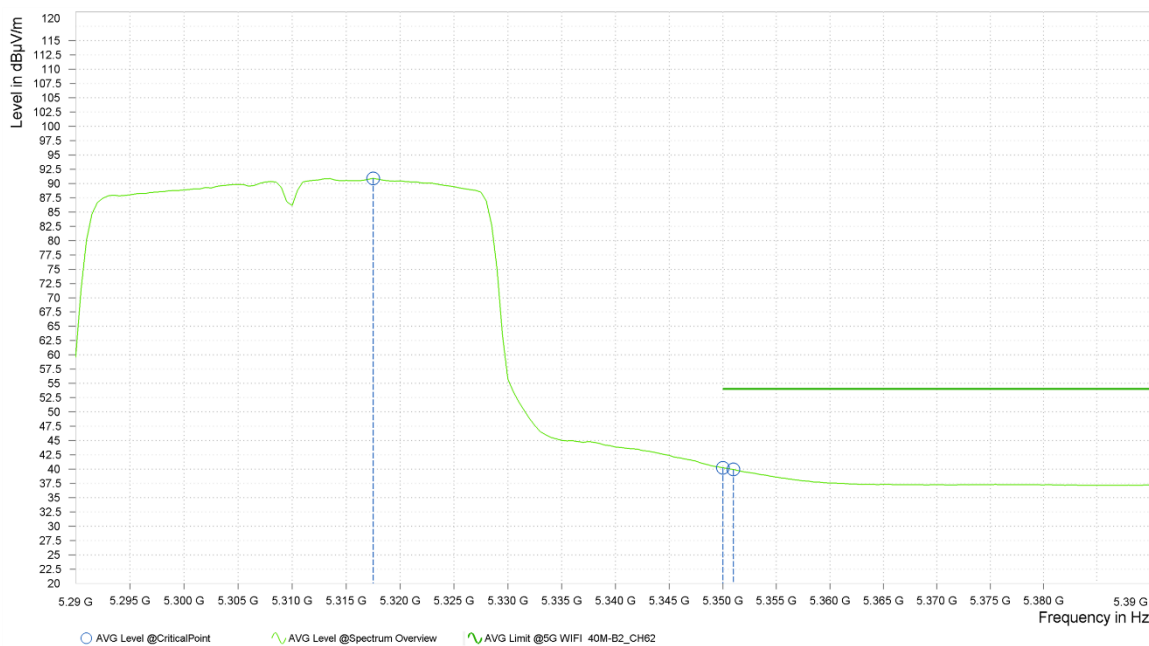



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,314.000	103.47			11.01	V	102.5	2.00
4	5,350.000	53.78	74.00	20.22	11.10	V	256.2	1.00
4	5,352.000	54.04	74.00	19.96	11.11	V	256.2	1.00

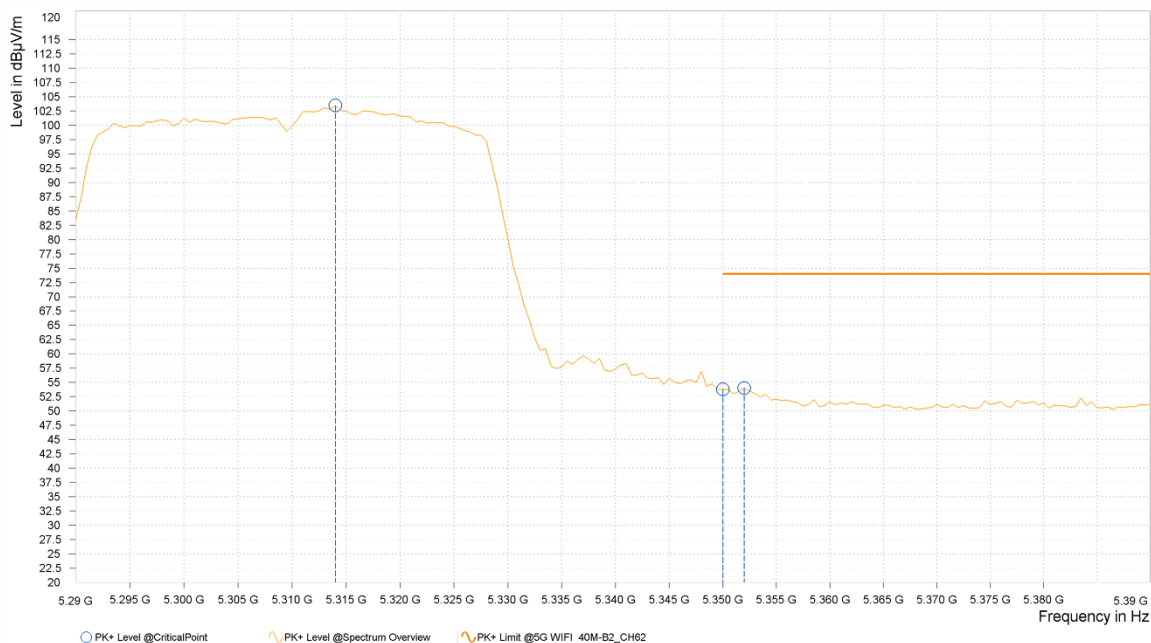



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,306.500	91.08			10.99	V	312.5	1.00
4	5,350.000	40.32	54.00	13.68	11.10	V	312.5	1.00
4	5,351.000	40.01	54.00	13.99	11.10	V	312.5	1.00

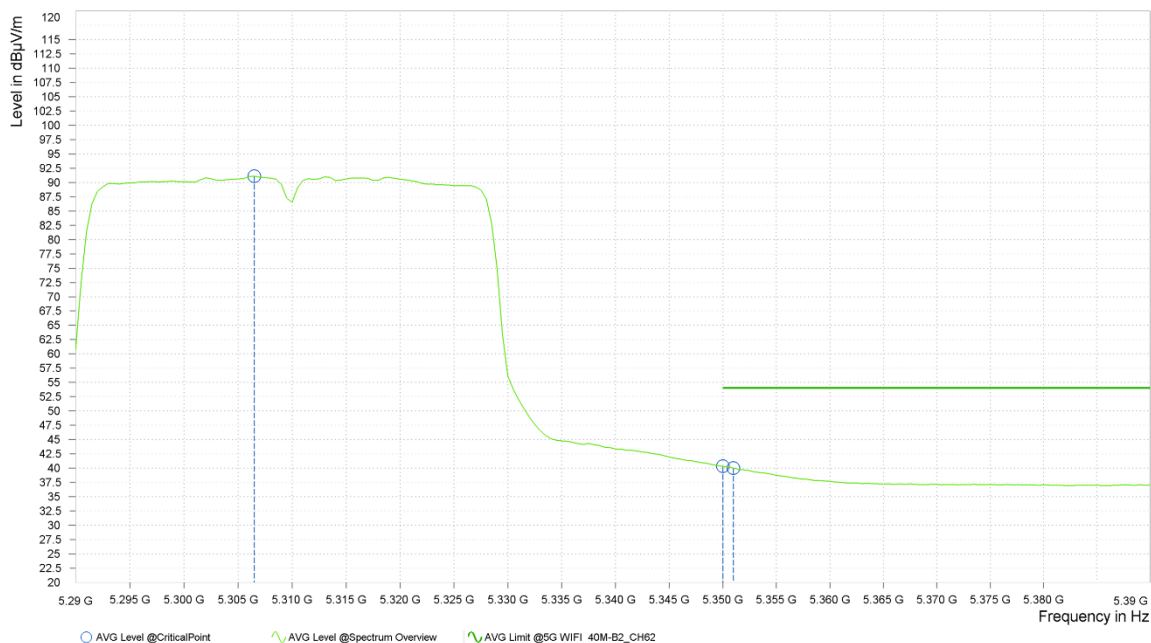

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 5310MHz: Fundamental frequency.




802.11AX (20MHz)

CHANNEL	TX Channel 52	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,258.900	111.78			16.39	H	1	1.00
4	5,350.000	55.62	74.00	18.38	16.73	H	253	2.00
4	5,358.650	56.03	74.00	17.97	16.79	H	310.4	2.00

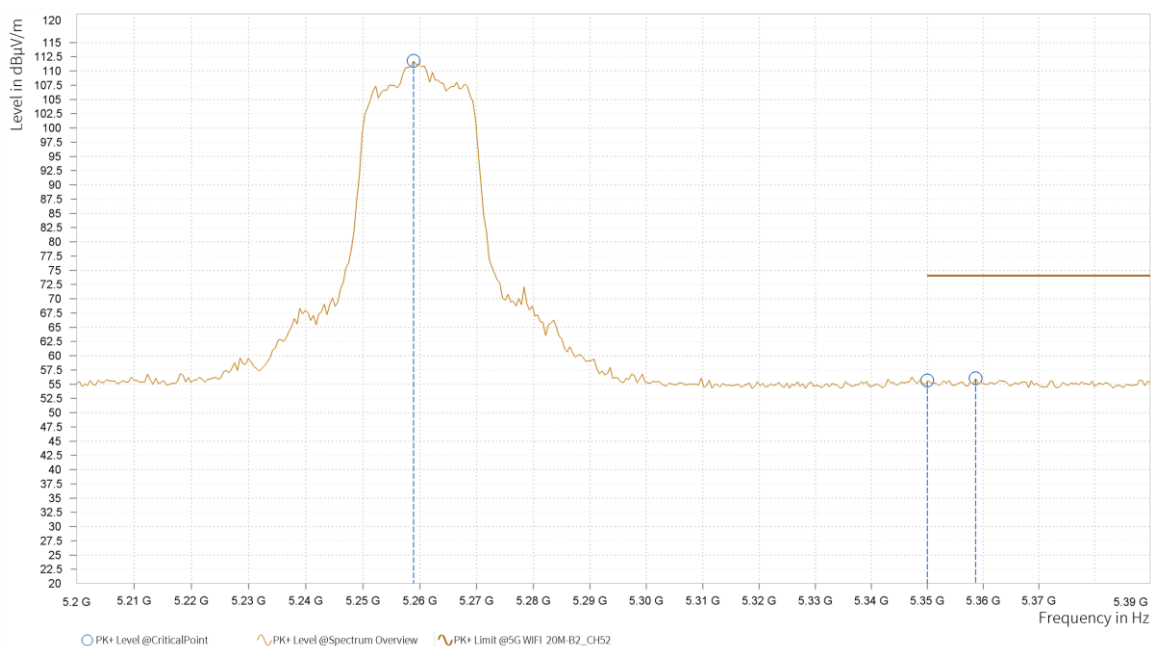



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,258.900	98.03			16.39	H	1	1.00
4	5,350.000	41.41	54.00	12.59	16.73	H	305.5	1.00
4	5,353.900	41.42	54.00	12.58	16.76	H	305.5	1.00





ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,261.280	109.21			16.39	V	359	1.00
4	5,350.000	53.89	74.00	20.11	16.73	V	255.4	2.00
4	5,374.325	54.81	74.00	19.19	16.89	V	255.4	2.00

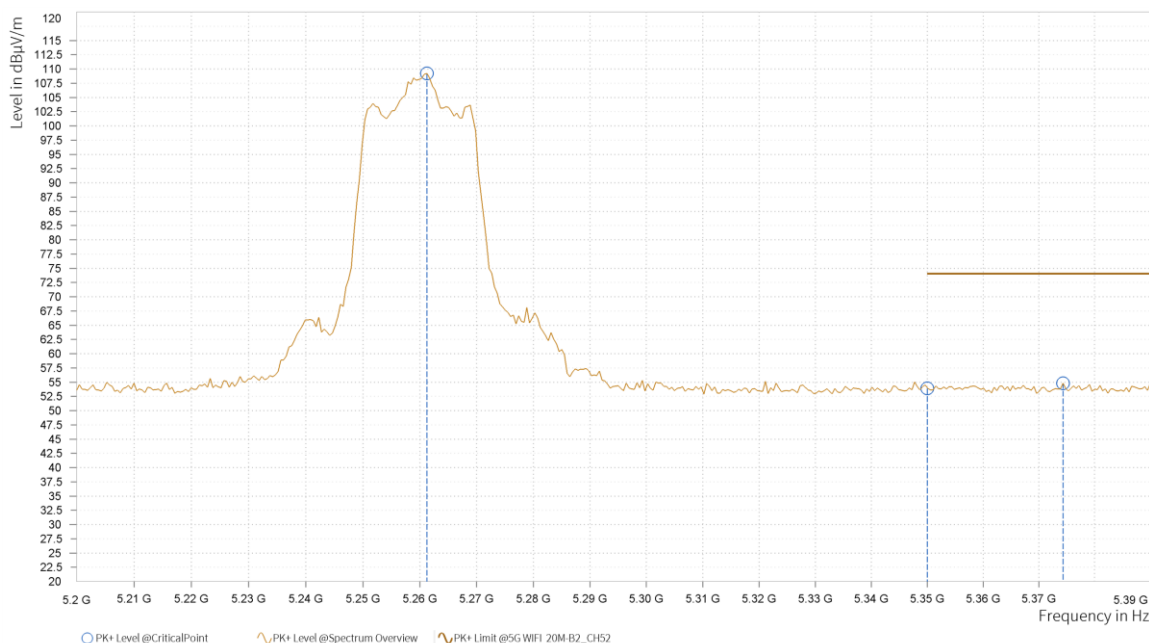




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,260.800	96.01			16.39	V	359.1	1.00
4	5,350.000	40.38	54.00	13.62	16.73	V	267.2	1.00
4	5,351.525	40.36	54.00	13.64	16.74	V	267.2	1.00



REMARKS:


- 1 Emission Level = Read Level+ Antenna FAXtor + Cable Loss- Preamp FAXtor
- 2 Margin value = Limit value- Emission level.
- 3 5260MHz: Fundamental frequency.

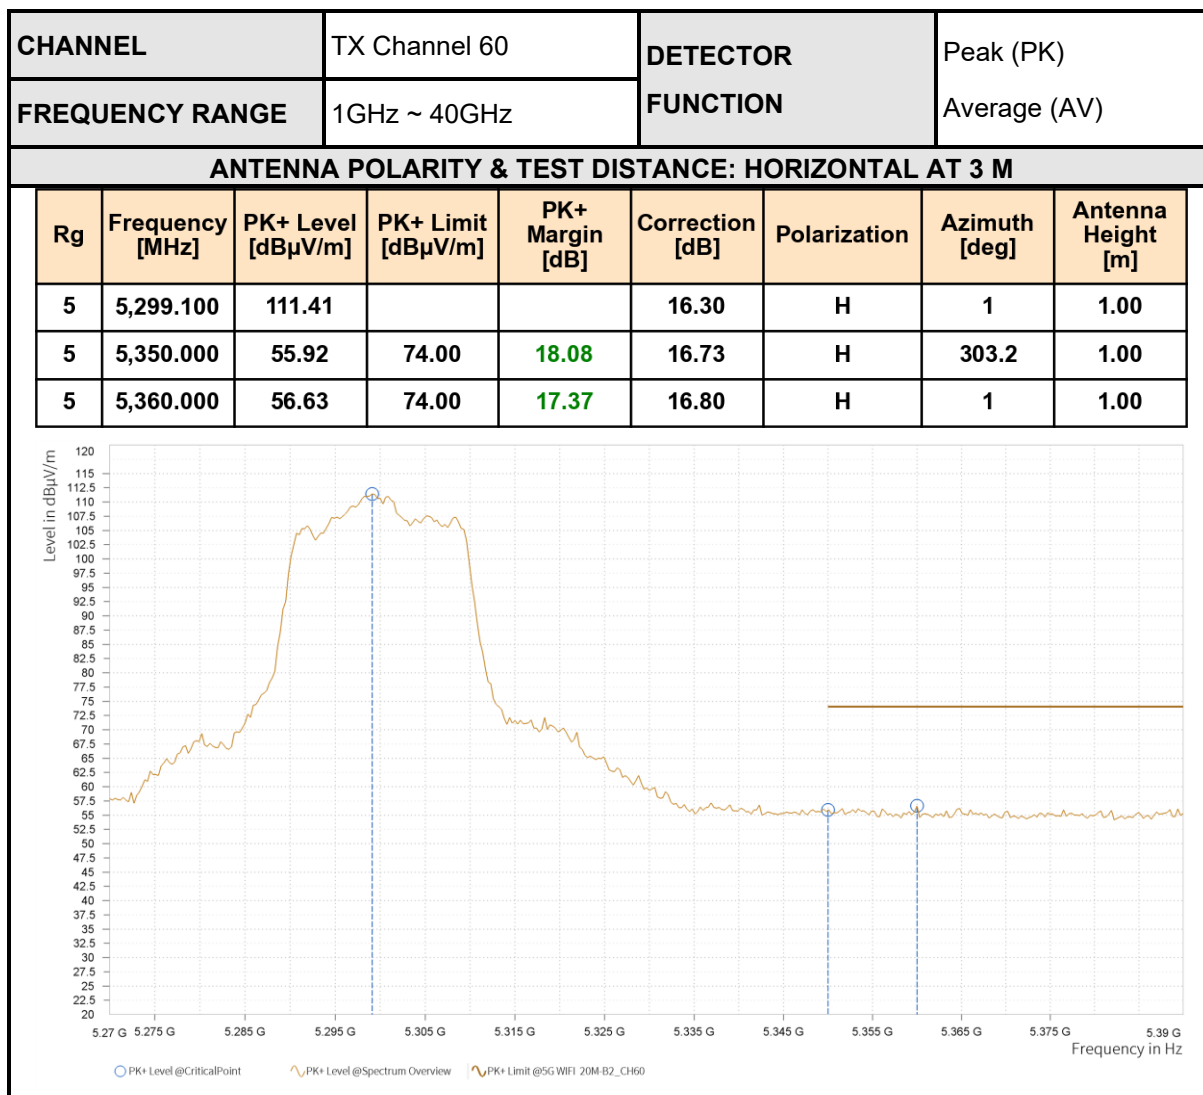



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,299.100	97.74			16.30	H	1	1.00
5	5,350.000	41.74	54.00	12.26	16.73	H	359.1	1.00
5	5,352.200	41.80	54.00	12.20	16.75	H	300.9	1.00

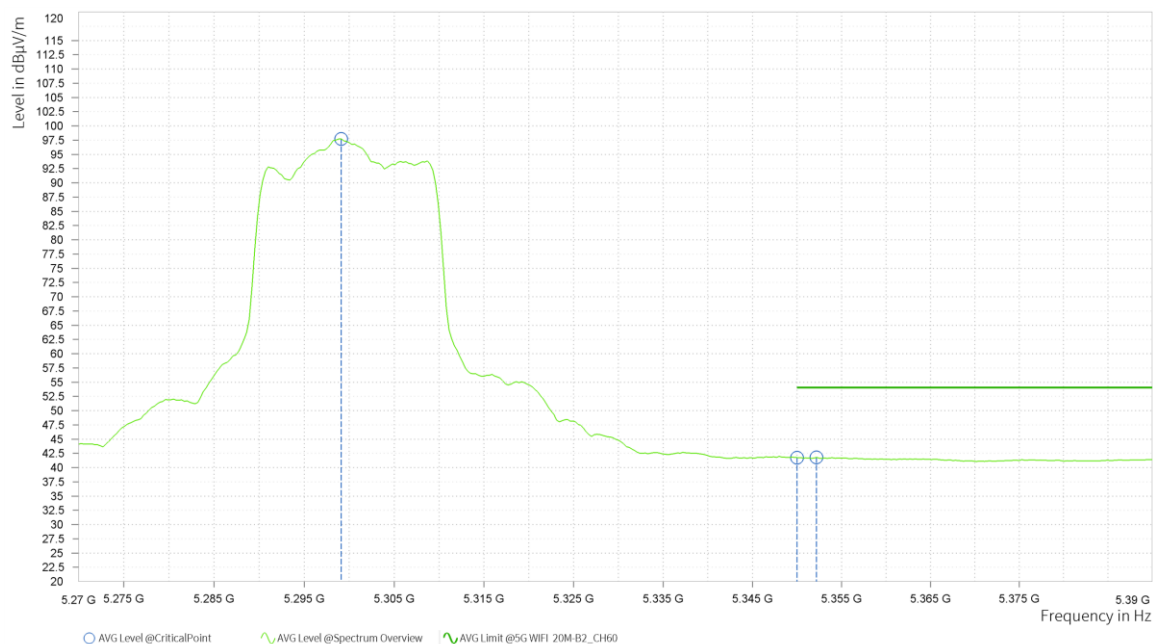



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,301.200	109.93			16.32	V	309.2	1.00
5	5,350.000	54.78	74.00	19.22	16.73	V	309.2	1.00
5	5,367.200	55.33	74.00	18.67	16.85	V	257.8	1.00

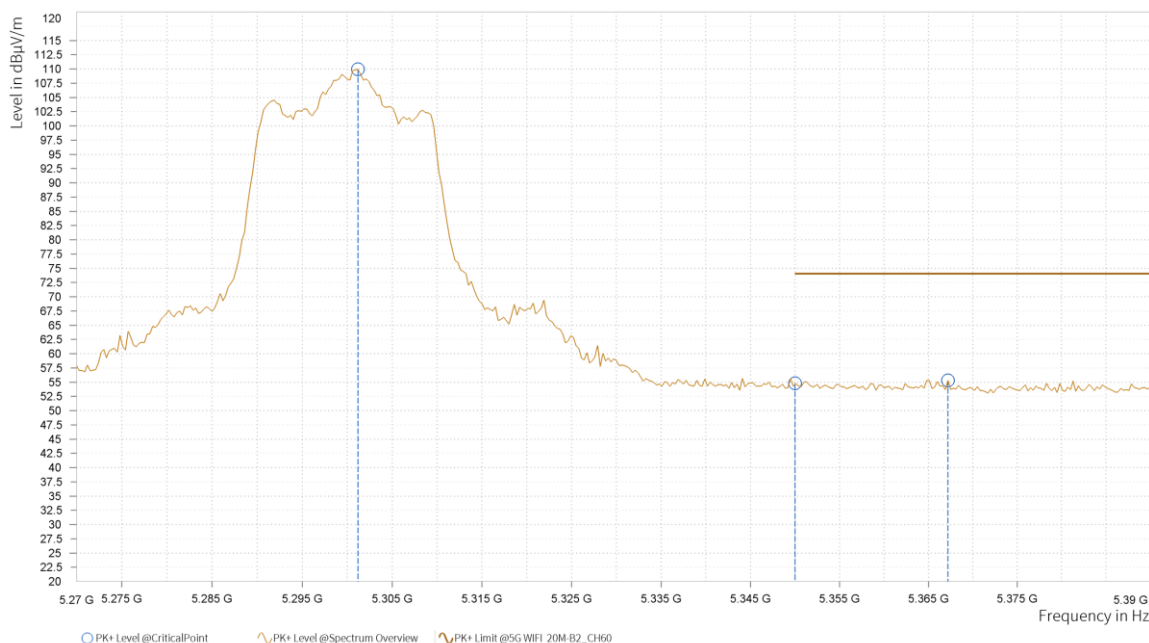




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,300.900	95.98			16.32	V	306.8	1.00
5	5,350.000	40.85	54.00	13.15	16.73	V	306.8	1.00
5	5,350.400	40.79	54.00	13.21	16.74	V	359.1	1.00

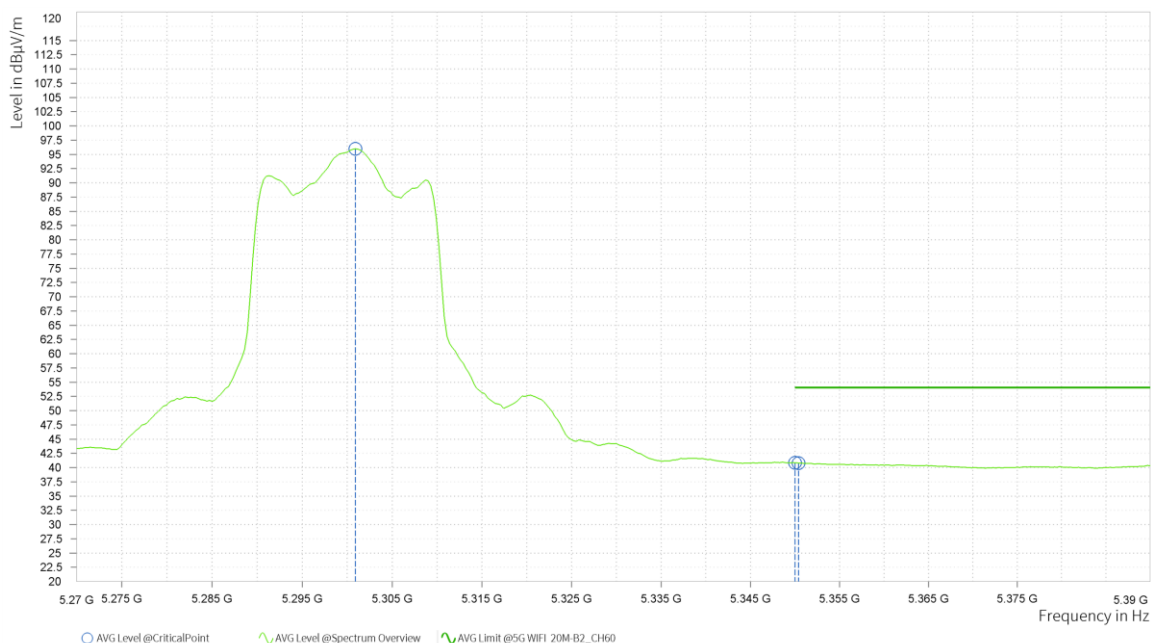

REMARKS:

- 1 Emission Level = Read Level+ Antenna FAXtor + Cable Loss- Preamp FAXtor
- 2 Margin value = Limit value- Emission level.
- 3 5300MHz: Fundamental frequency.

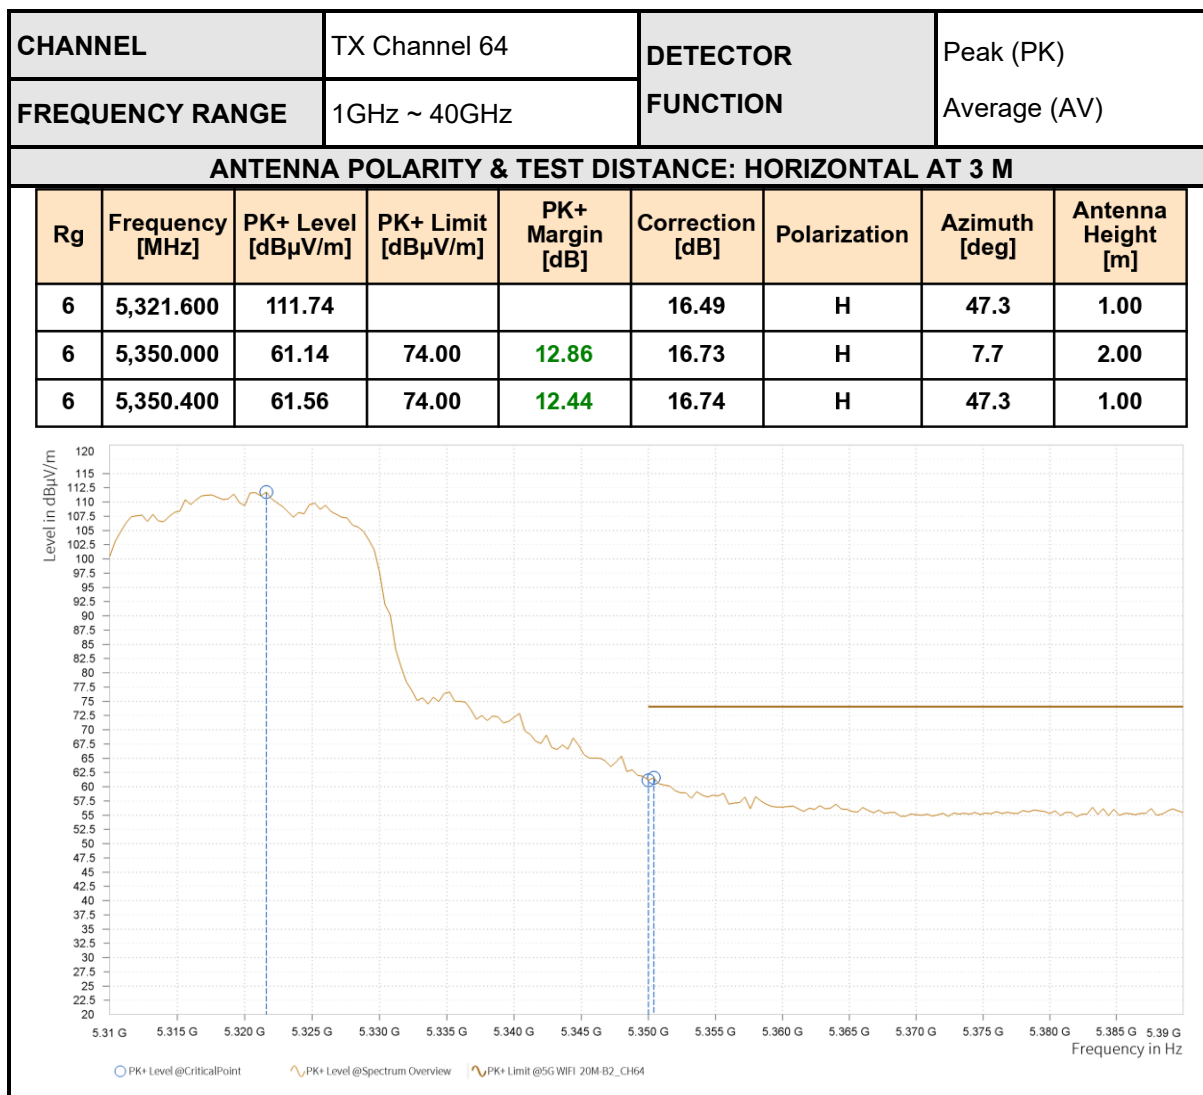



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,318.800	96.93			16.47	H	1	1.00
6	5,350.000	45.48	54.00	8.52	16.73	H	1	1.00
6	5,350.400	45.32	54.00	8.68	16.74	H	1	1.00





ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M


Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,321.200	109.25			16.49	V	312.8	1.00
6	5,350.000	58.61	74.00	15.39	16.73	V	1	1.00
6	5,350.400	58.78	74.00	15.22	16.74	V	359	1.00

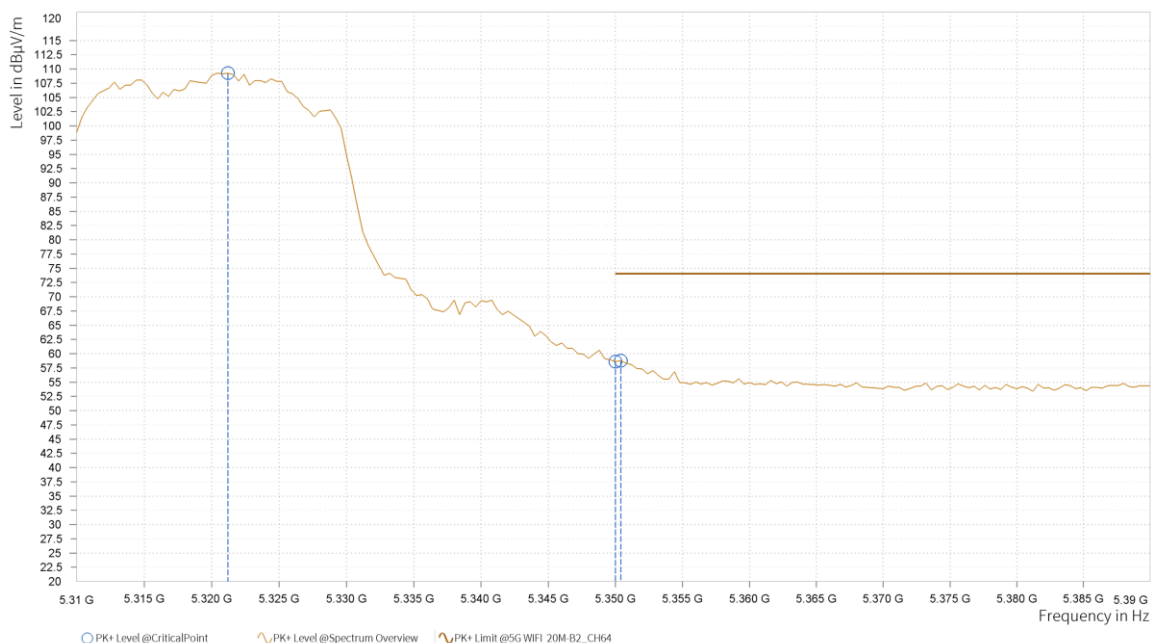



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,320.800	95.54			16.49	V	311.6	1.00
6	5,350.000	43.93	54.00	10.07	16.73	V	359.1	1.00
6	5,350.400	43.85	54.00	10.15	16.74	V	359.1	1.00

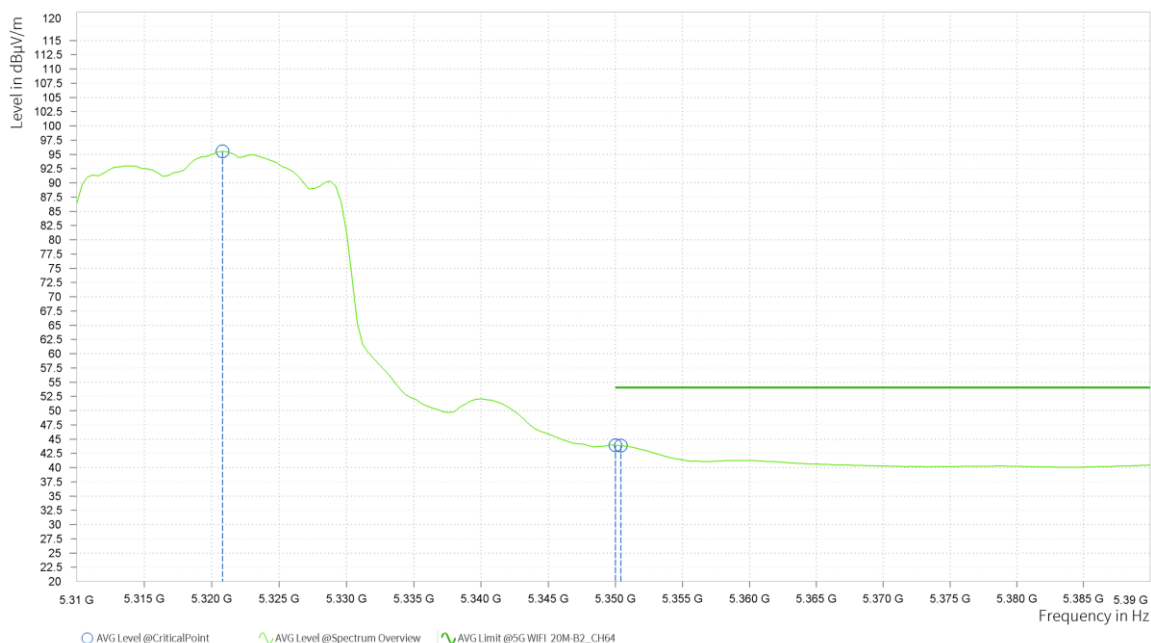

REMARKS:

- 1 Emission Level = Read Level+ Antenna FAXtor + Cable Loss- Preamp FAXtor
- 2 Margin value = Limit value- Emission level.
- 3 5320MHz: Fundamental frequency.




802.11AX (40MHz)

CHANNEL	TX Channel 54	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,273.370	108.43			16.36	H	331.1	1.00
3	5,350.000	55.31	74.00	18.69	16.73	H	174	2.00
3	5,451.567	58.01	74.00	15.99	18.22	H	232.1	1.00

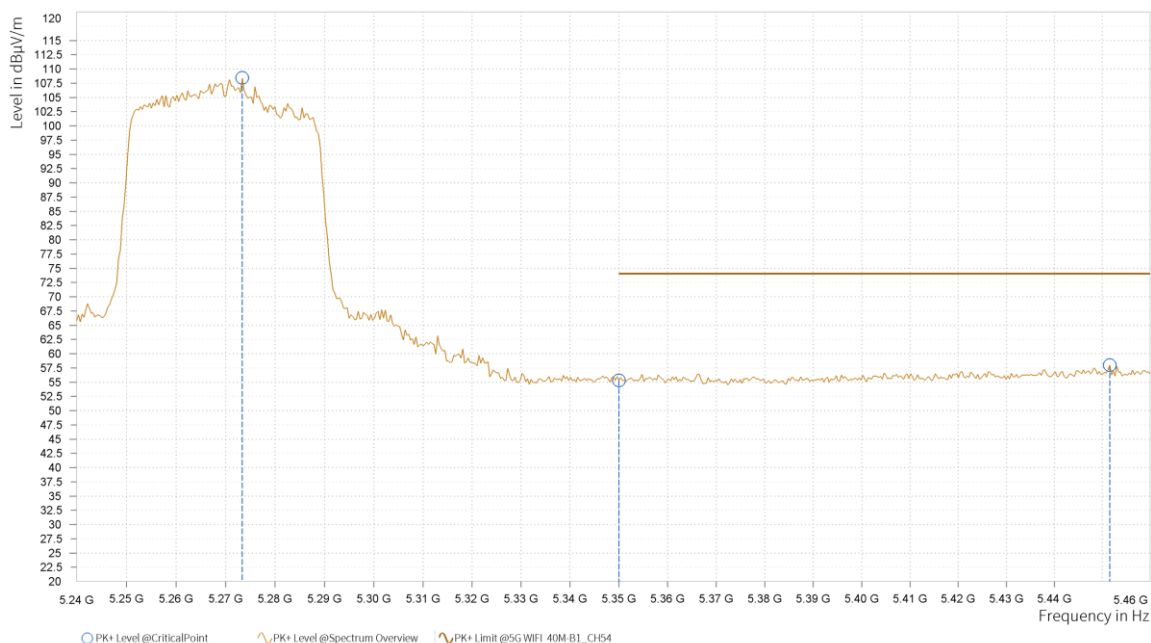



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,267.133	93.08			16.37	H	4.5	1.00
3	5,350.000	40.93	54.00	13.07	16.73	H	27.8	1.00
3	5,448.633	42.13	54.00	11.87	18.16	H	359	2.00





ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,269.333	105.14			16.37	V	1	1.00
3	5,350.000	54.35	74.00	19.65	16.73	V	333	1.00
3	5,455.600	56.49	74.00	17.51	18.32	V	355.5	2.00

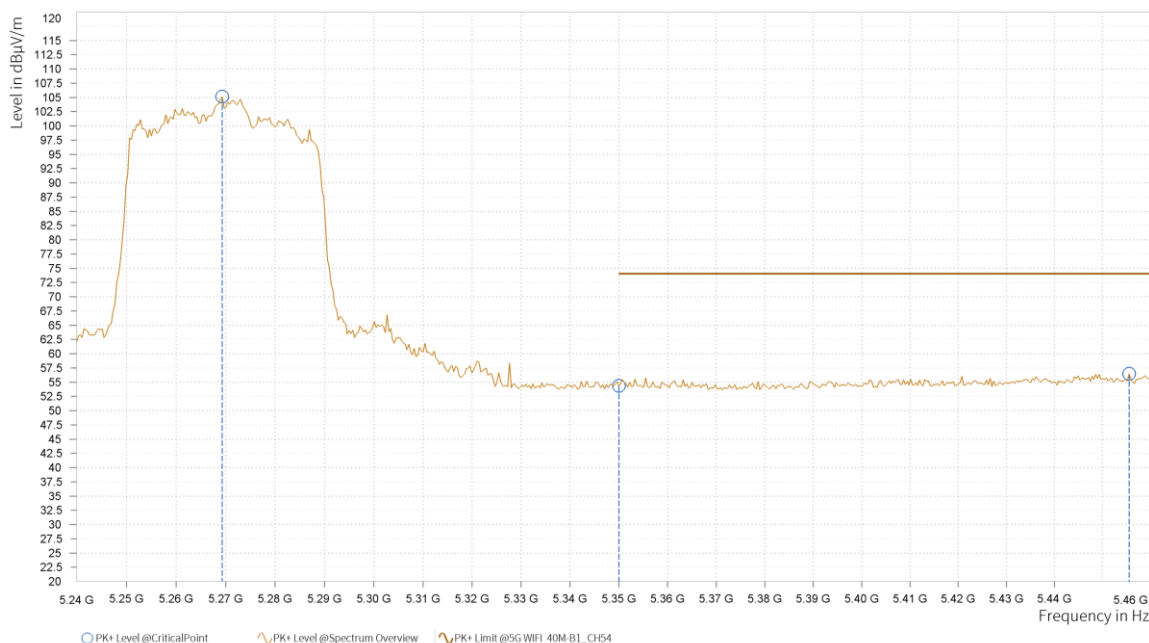




ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,268.967	92.66			16.37	V	1	1.00
3	5,350.000	40.91	54.00	13.09	16.73	V	359	1.00
3	5,447.900	42.11	54.00	11.89	18.14	V	106.6	2.00



REMARKS:

- 1 Emission Level = Read Level+ Antenna FAXtor + Cable Loss- Preamp FAXtor
- 2 Margin value = Limit value- Emission level.
- 3 5270MHz: Fundamental frequency.

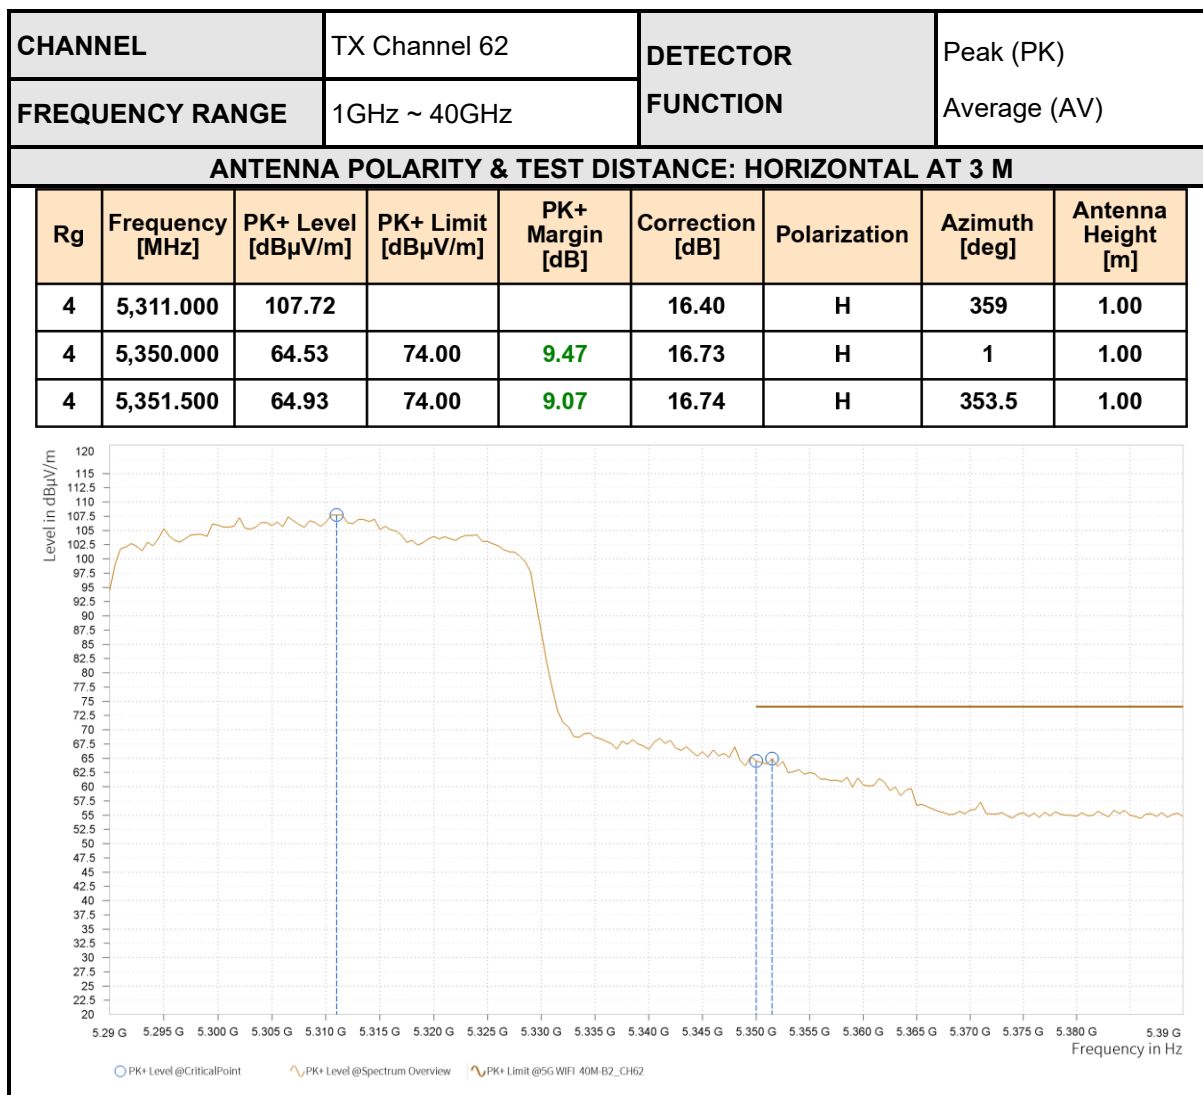



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,306.500	94.05			16.36	H	5.7	1.00
4	5,350.000	48.28	54.00	5.72	16.73	H	359.1	1.00
4	5,350.500	48.41	54.00	5.59	16.74	H	353.6	1.00





ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,311.500	105.04			16.41	V	313.8	1.00
4	5,350.000	63.68	74.00	10.32	16.73	V	194.3	2.00
4	5,350.500	63.68	74.00	10.32	16.74	V	359.1	1.00

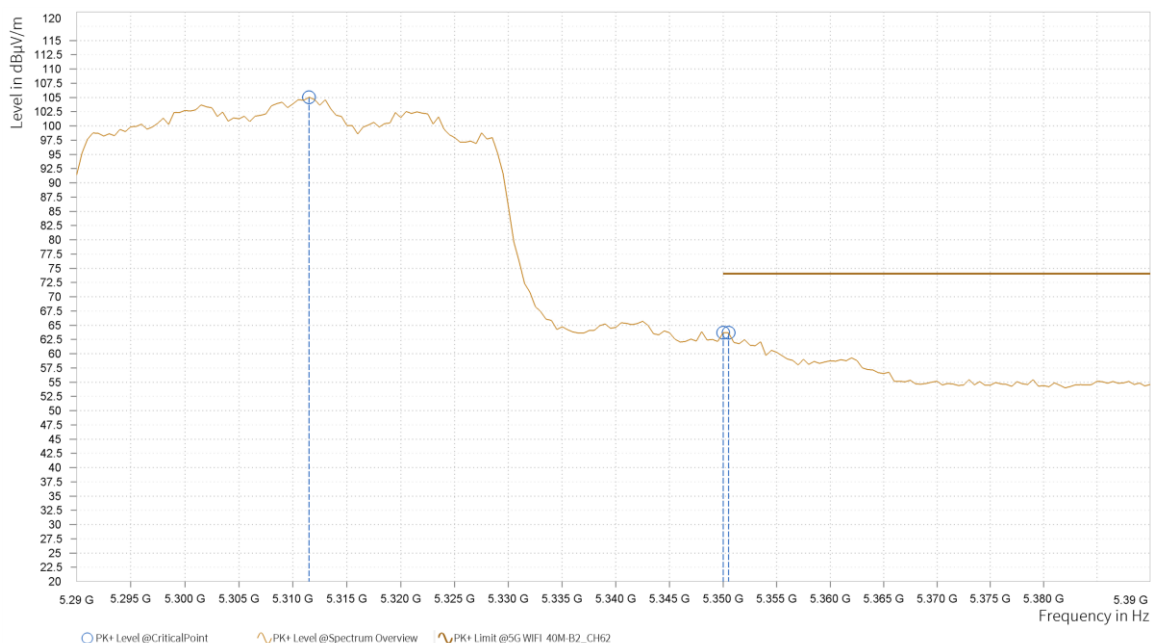



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,311.000	92.12			16.40	V	359.1	1.00
4	5,350.000	46.44	54.00	7.56	16.73	V	273.2	1.00
4	5,350.500	46.28	54.00	7.72	16.74	V	273.2	1.00



REMARKS:

- 1 Emission Level = Read Level+ Antenna FAXtor + Cable Loss- Preamp FAXtor
- 2 Margin value = Limit value- Emission level.
- 3 5310MHz: Fundamental frequency.




802.11AX (80MHz)

CHANNEL	TX Channel 58	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,295.730	105.42			16.31	H	305.5	1.00
1	5,350.000	66.52	74.00	7.48	16.73	H	1	1.00
1	5,350.367	67.27	74.00	6.73	16.74	H	1.8	2.00

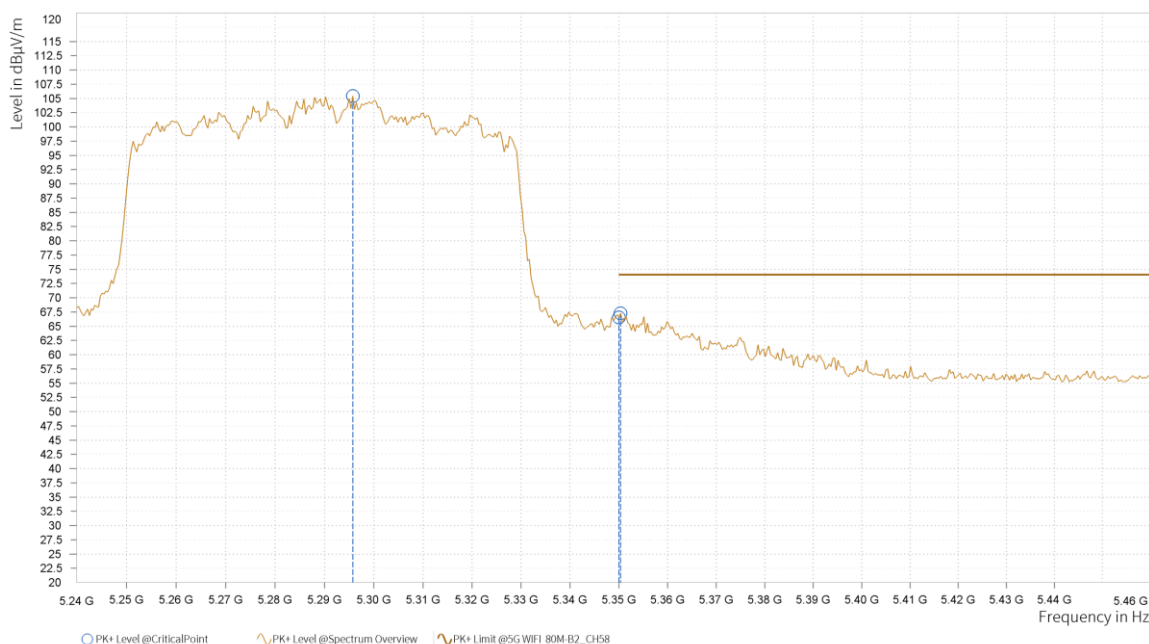



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,292.800	92.45			16.31	H	5.1	1.00
1	5,350.000	50.60	54.00	3.40	16.73	H	356.4	1.00
1	5,351.467	50.64	54.00	3.36	16.74	H	5.1	1.00





ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,290.970	106.24			16.32	V	359.1	1.00
1	5,350.000	67.27	74.00	6.73	16.73	V	359.1	1.00
1	5,351.467	66.27	74.00	7.73	16.74	V	310.4	1.00

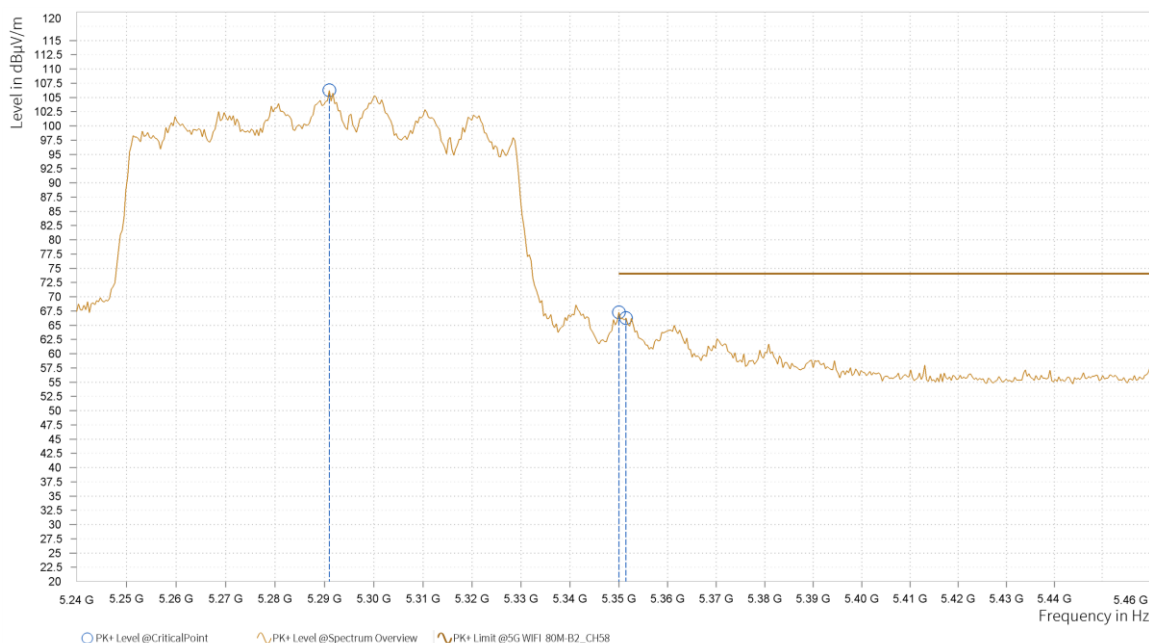



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,291.333	89.69			16.32	V	313.9	1.00
1	5,350.000	49.14	54.00	4.86	16.73	V	102.4	1.00
1	5,352.200	50.21	54.00	3.79	16.75	V	359.1	1.00



REMARKS:

- 1 Emission Level = Read Level+ Antenna FAXtor + Cable Loss- Preamp FAXtor
- 2 Margin value = Limit value- Emission level.
- 3 5290MHz: Fundamental frequency.



RU MODE

