






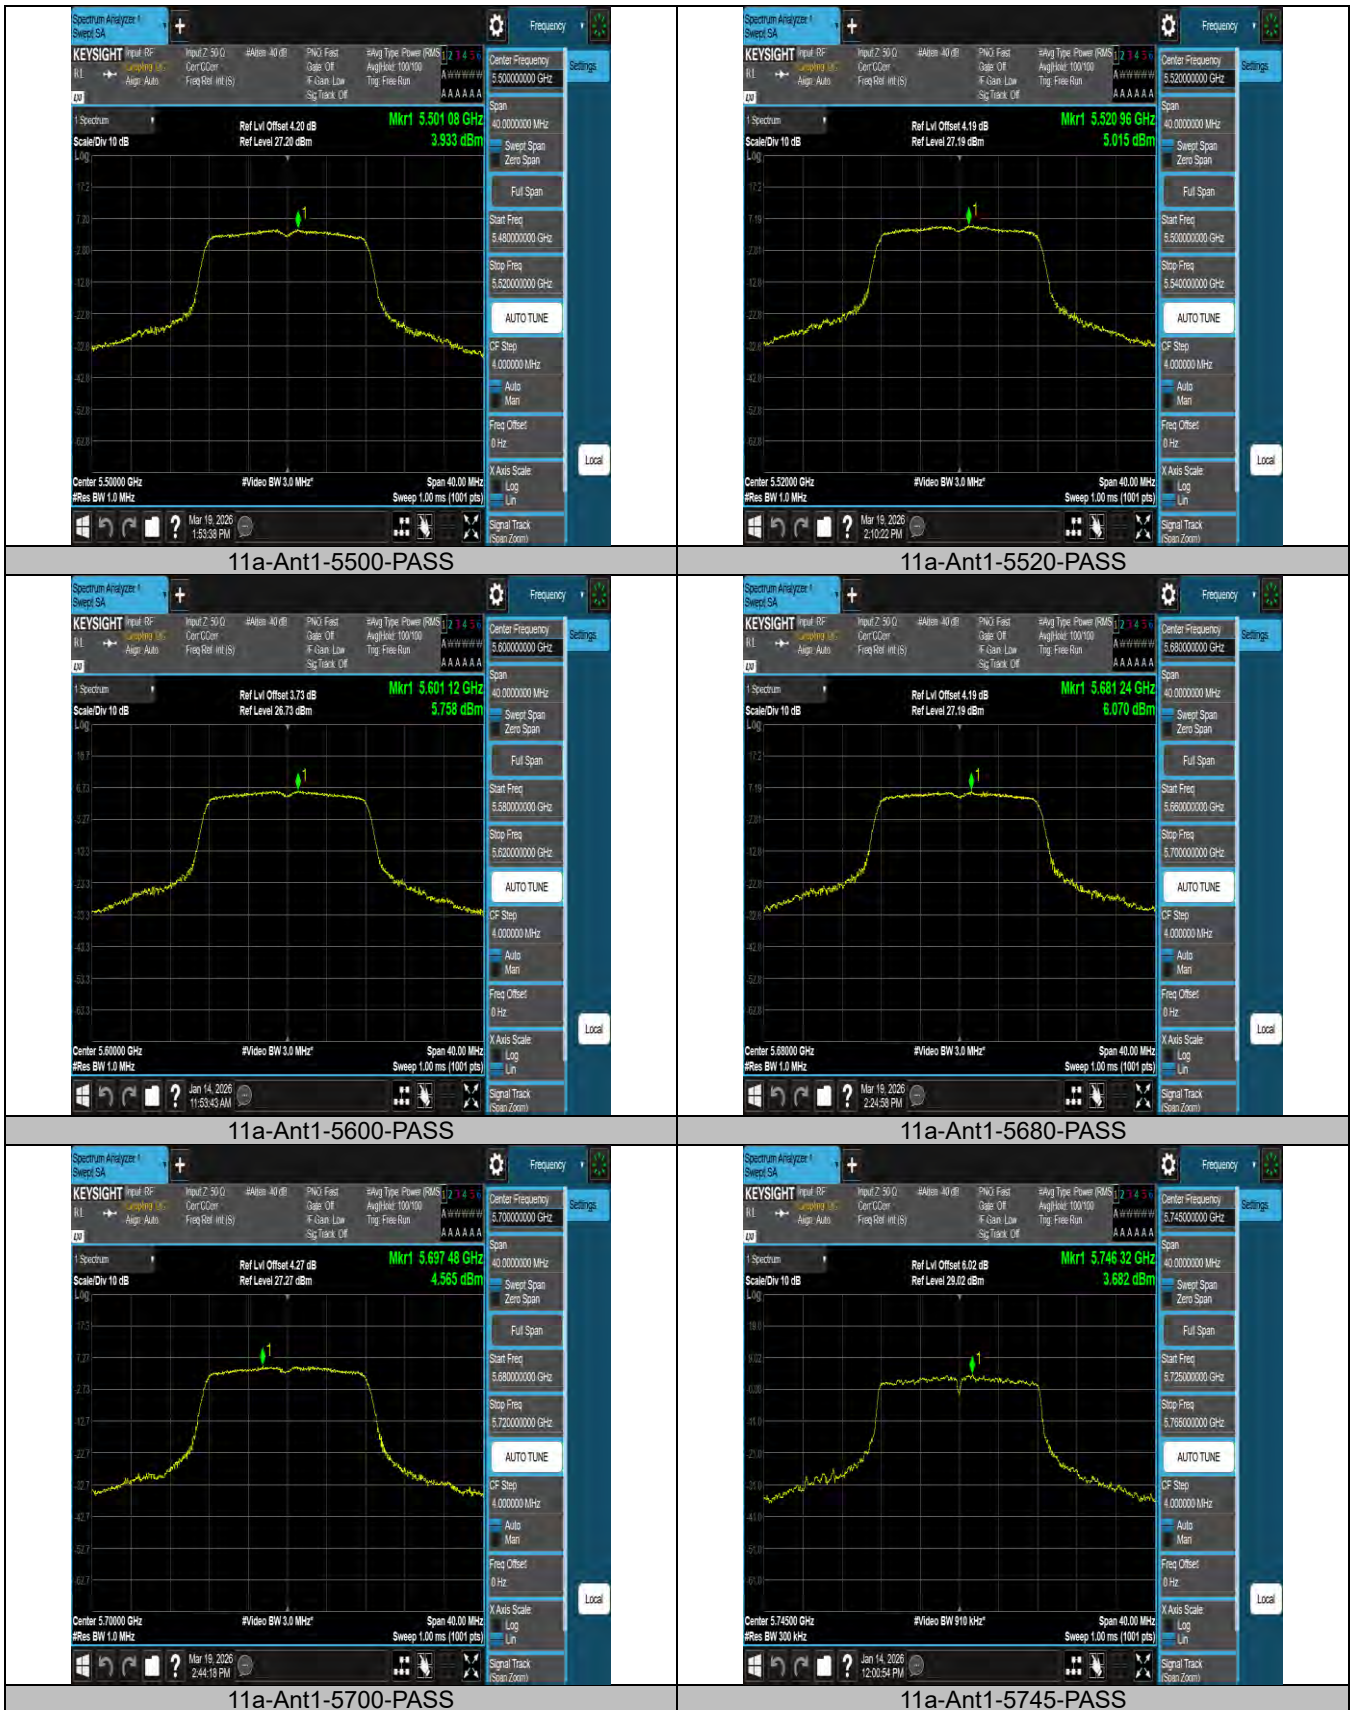


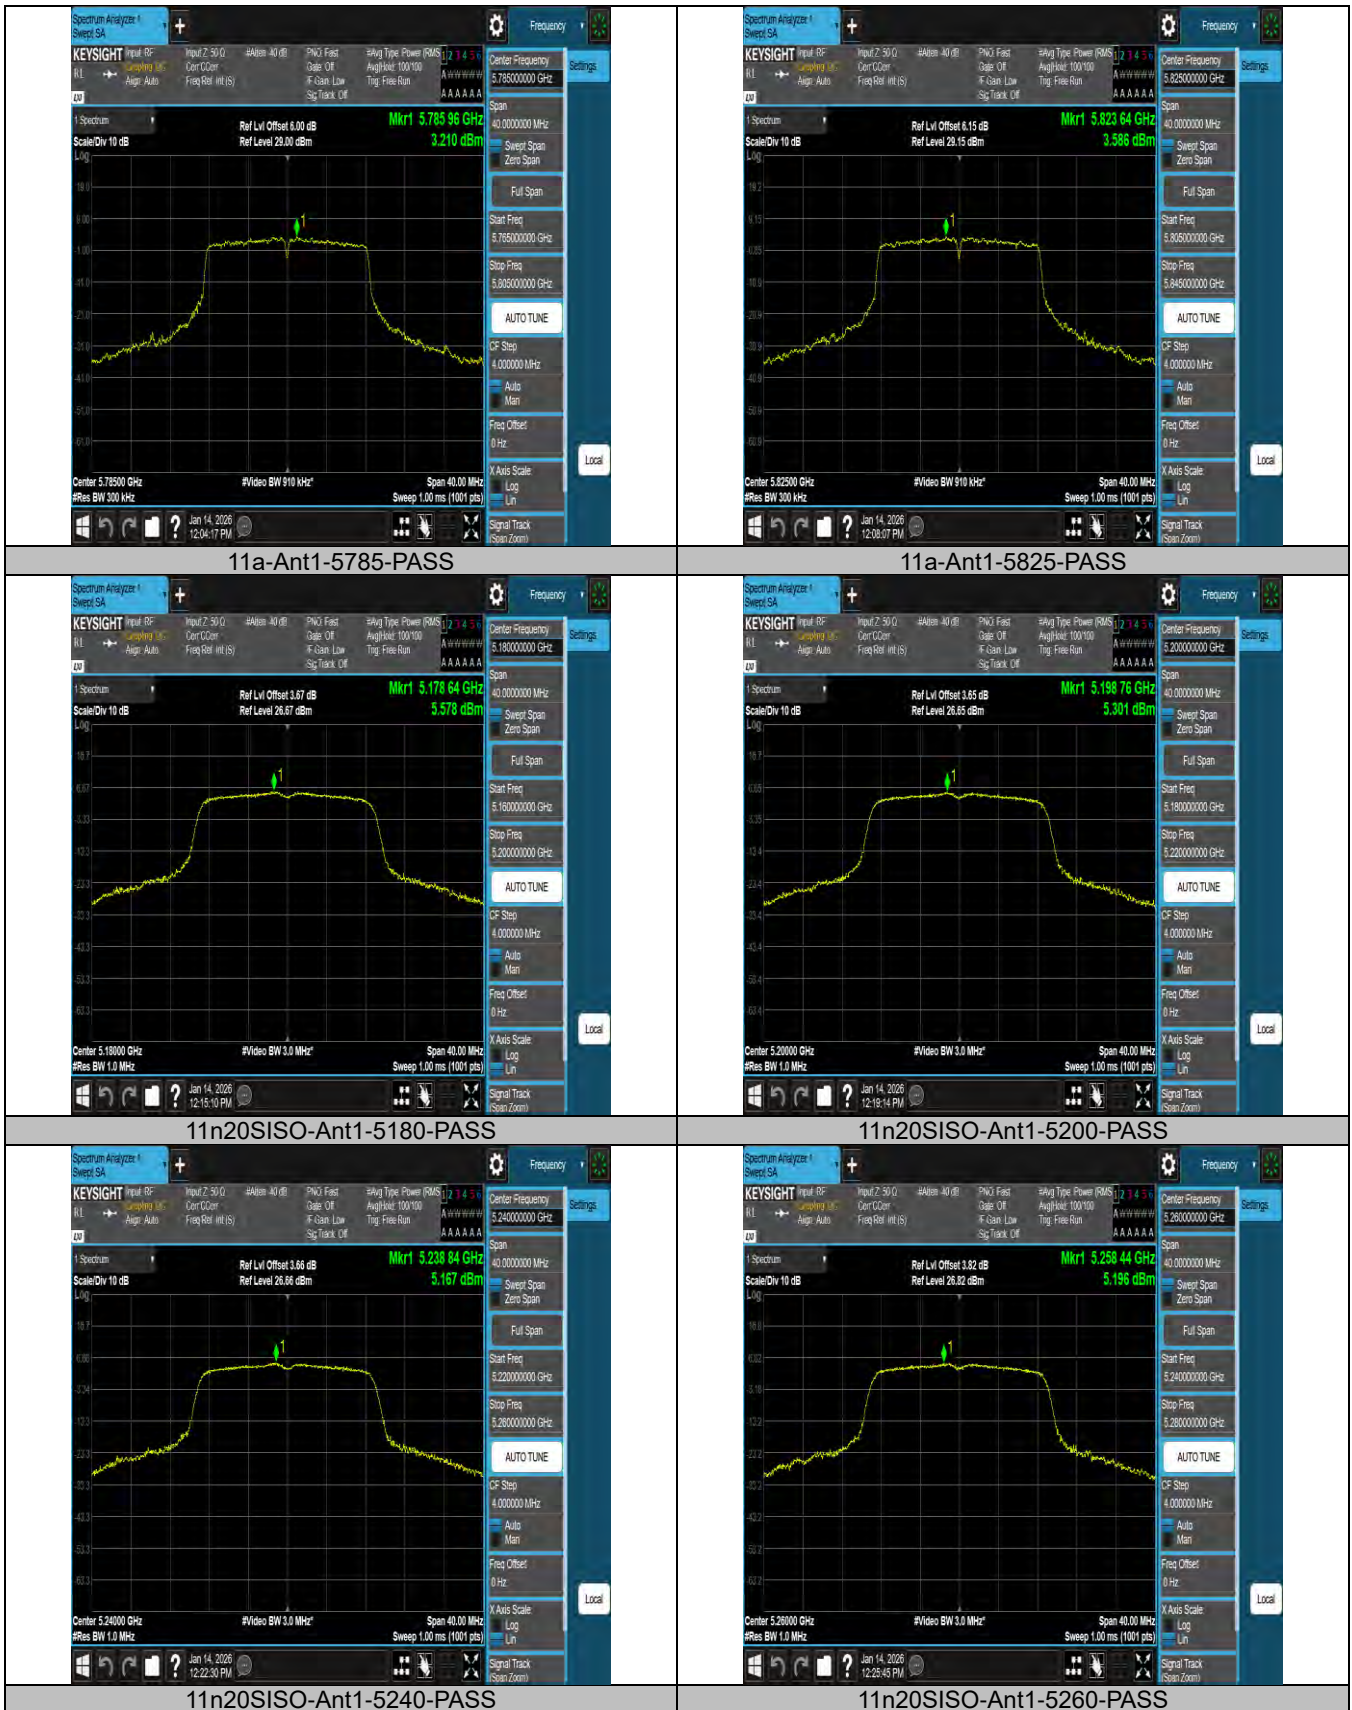


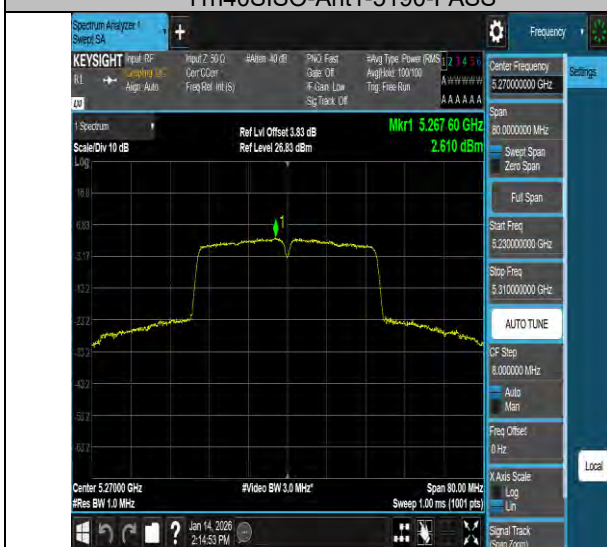


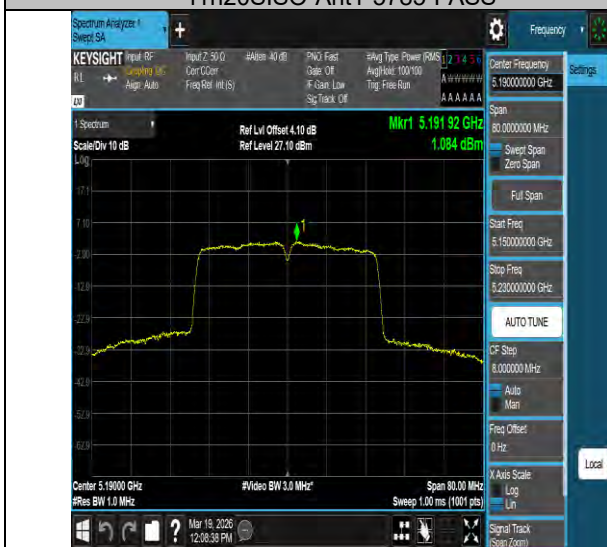

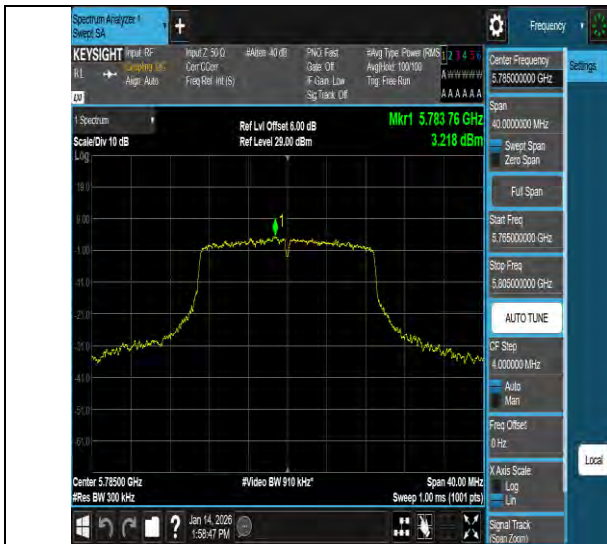

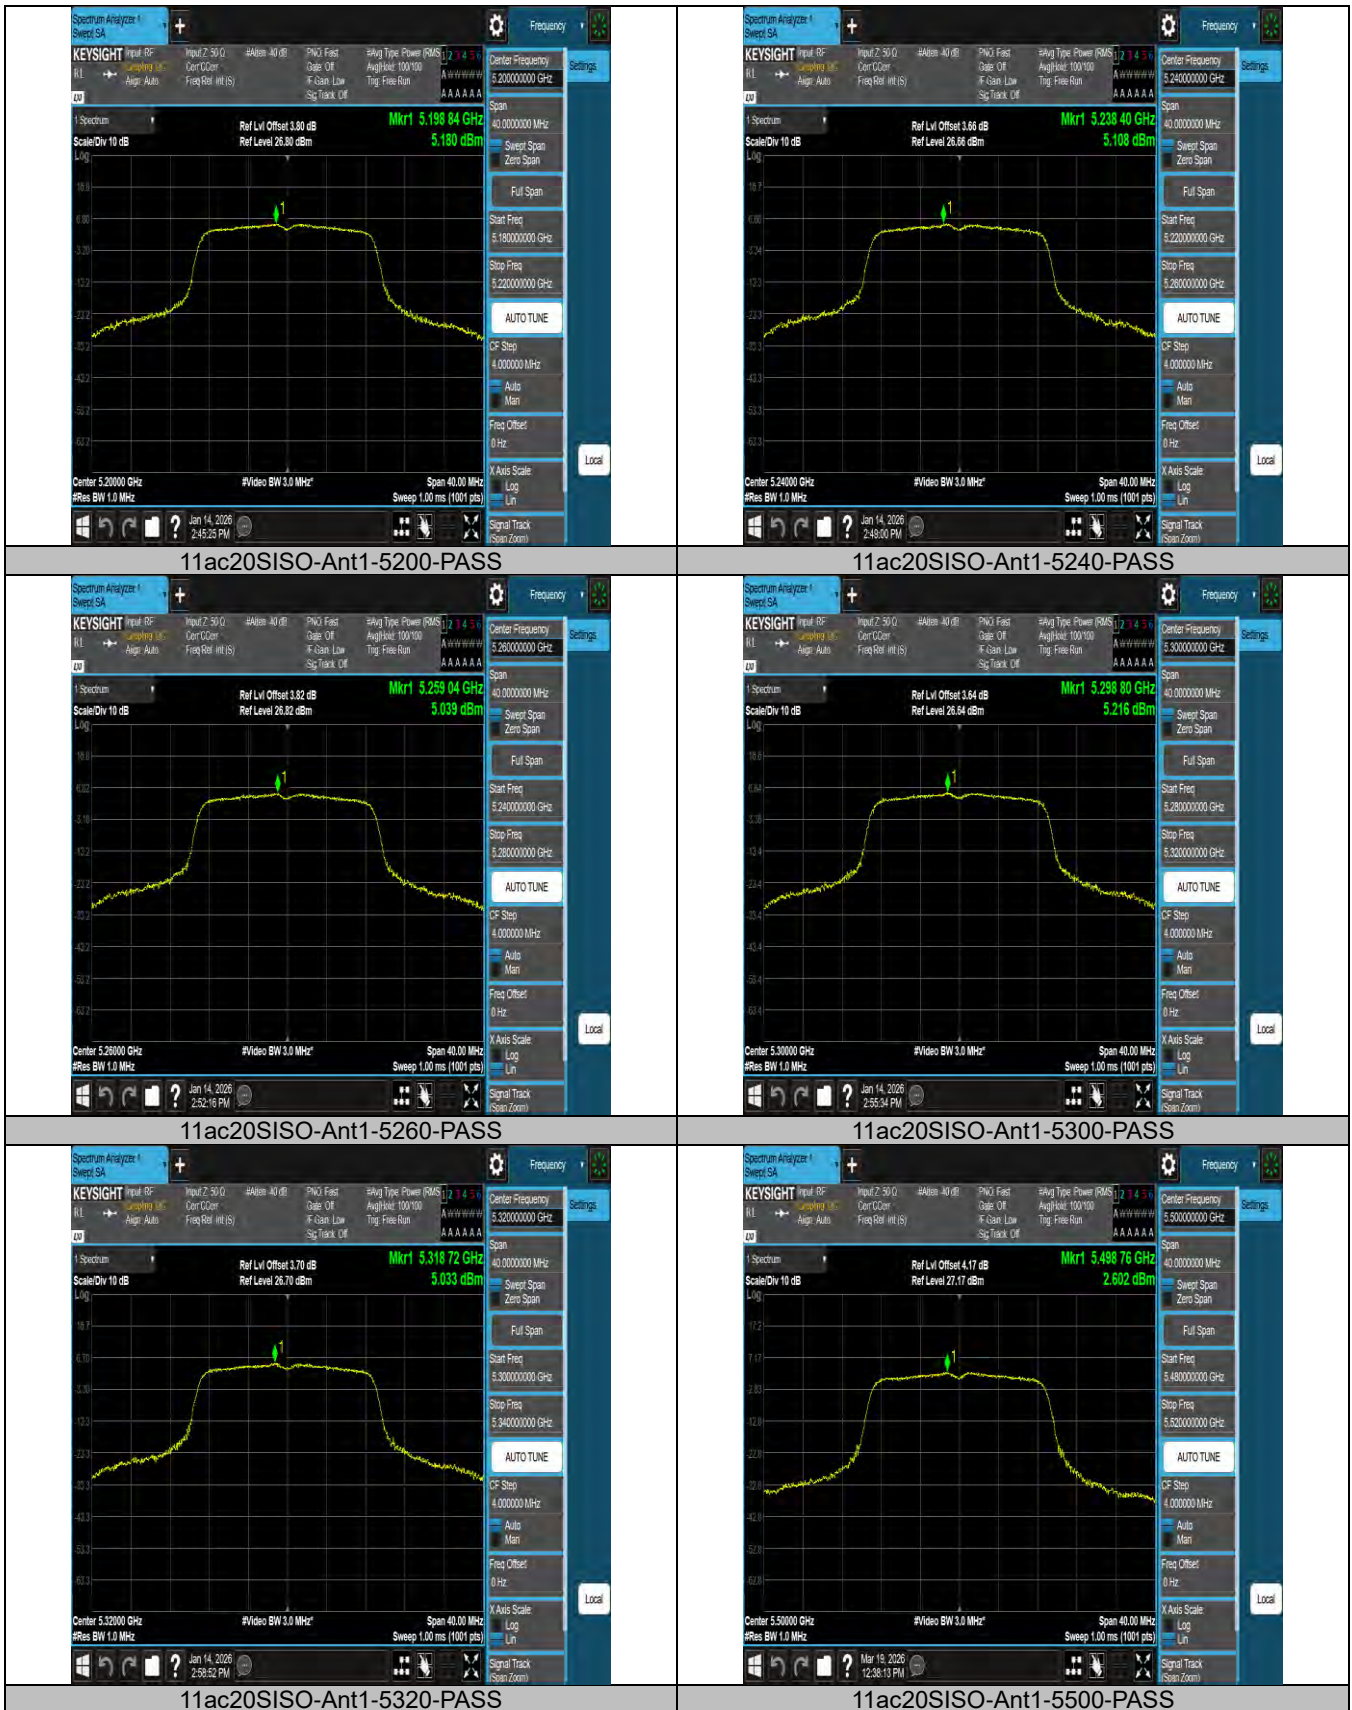




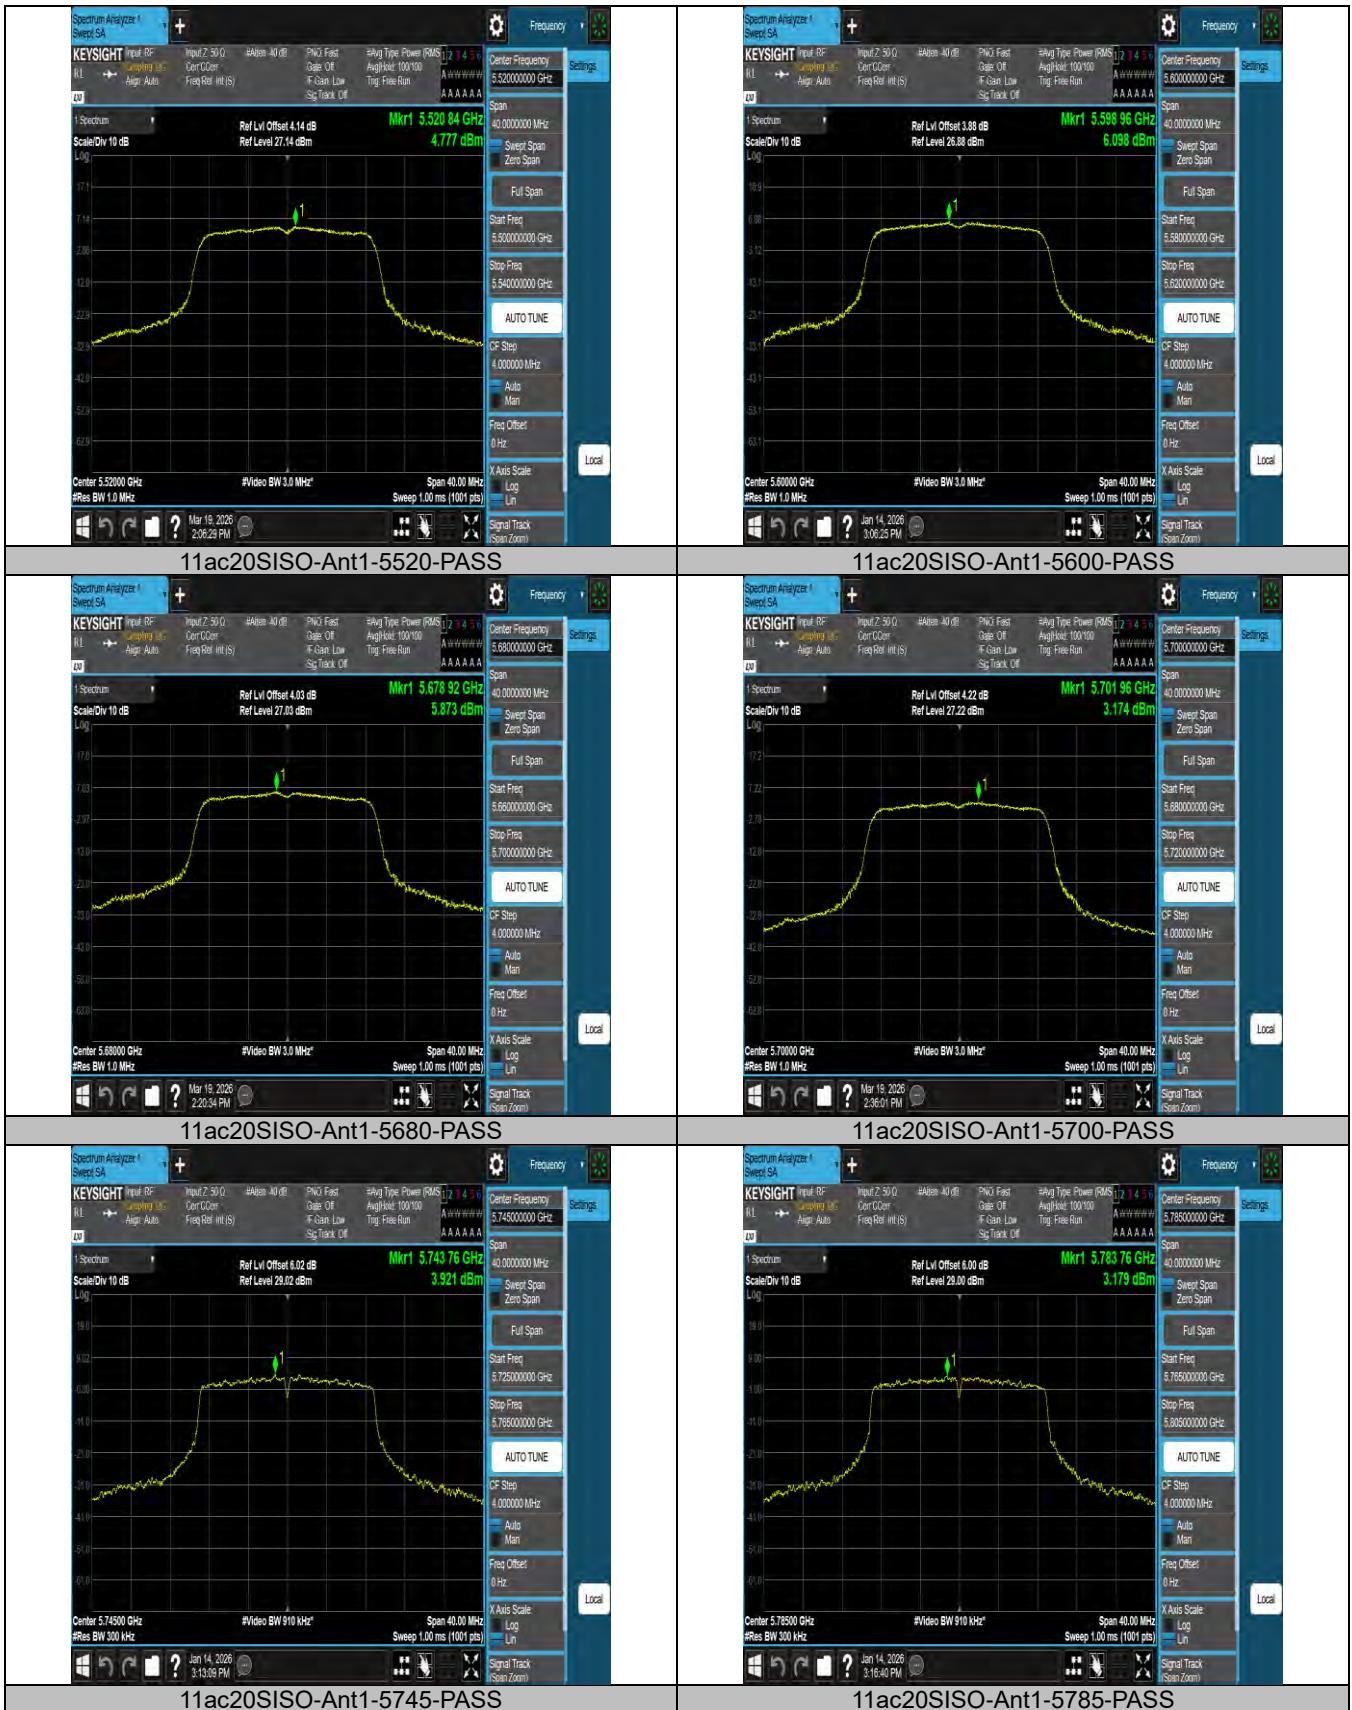


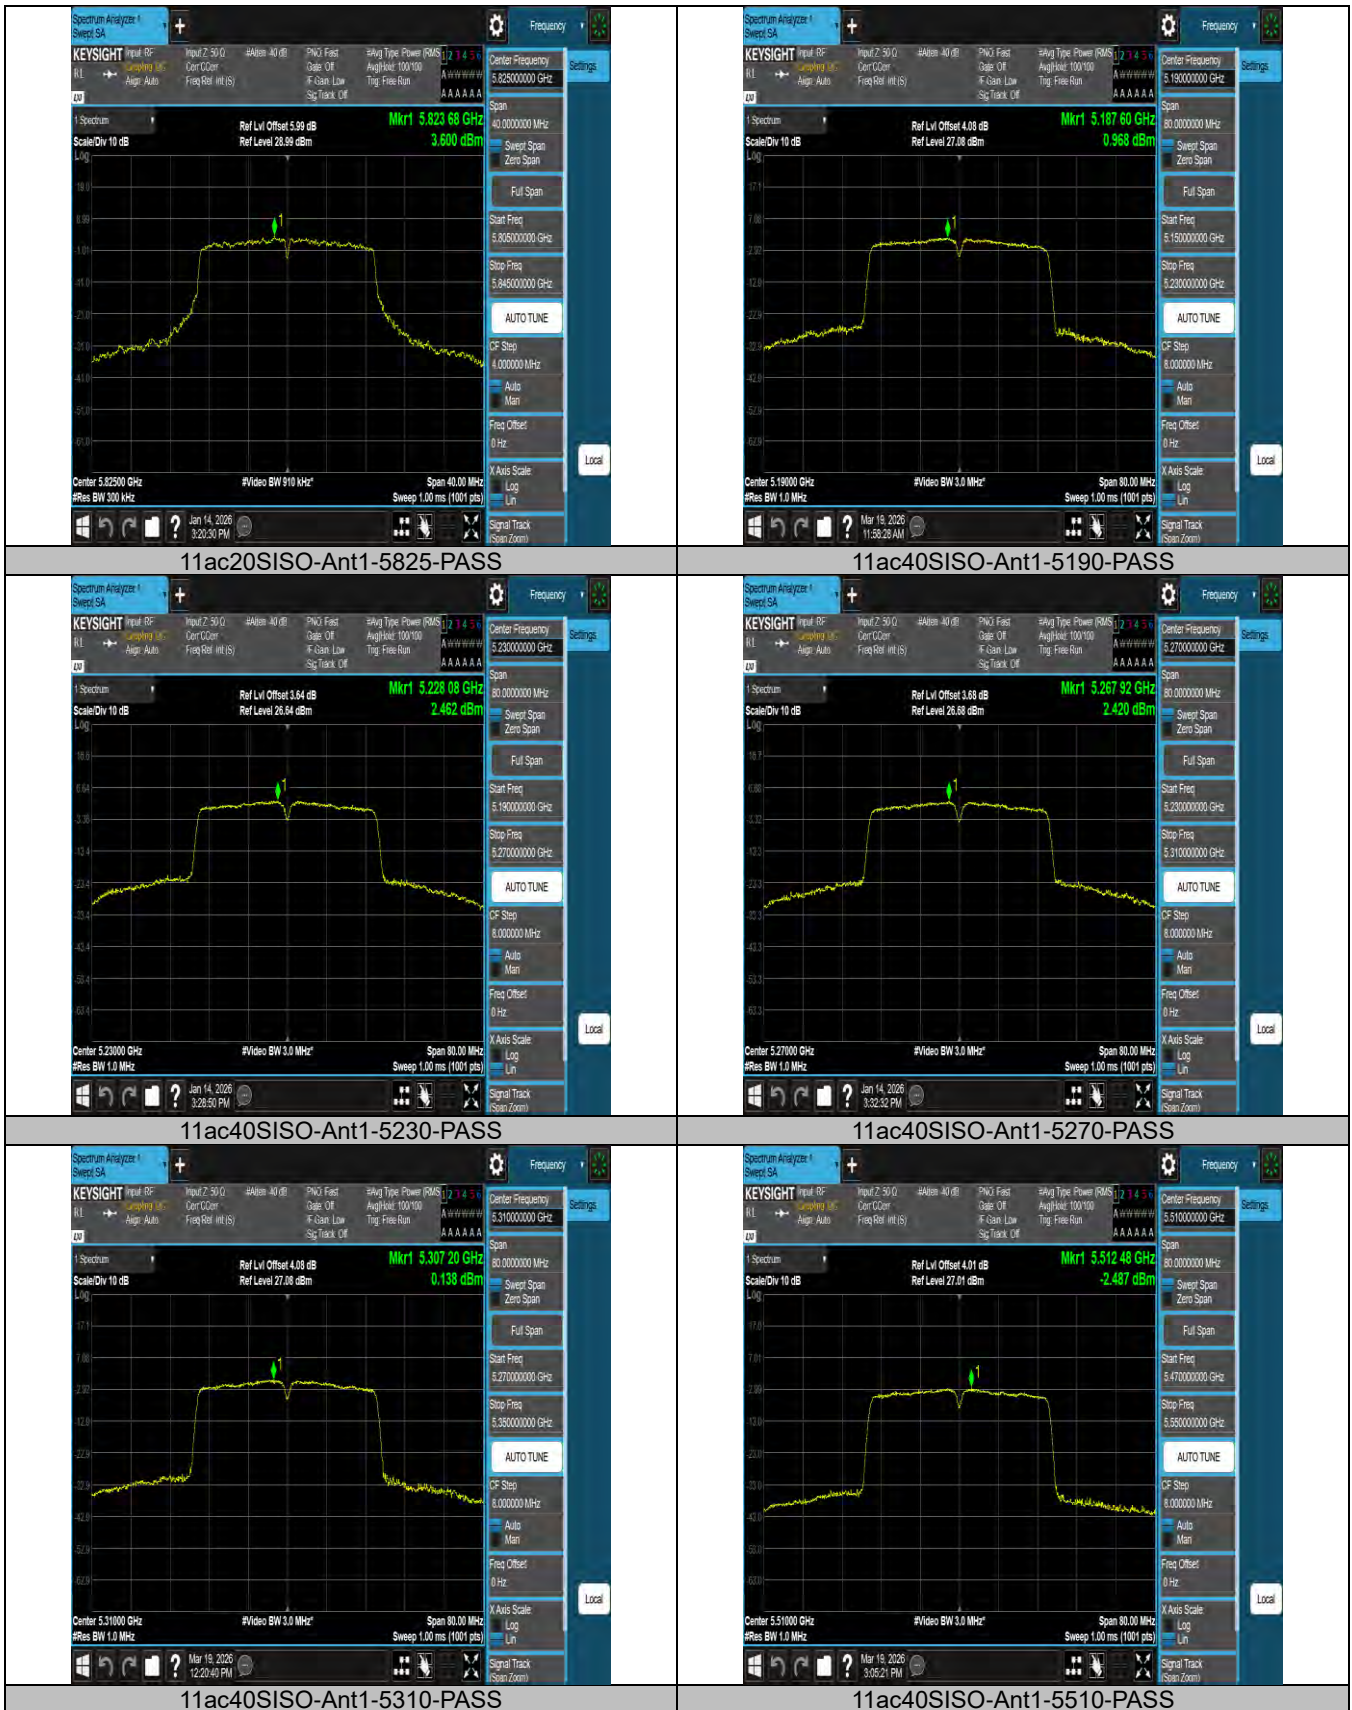








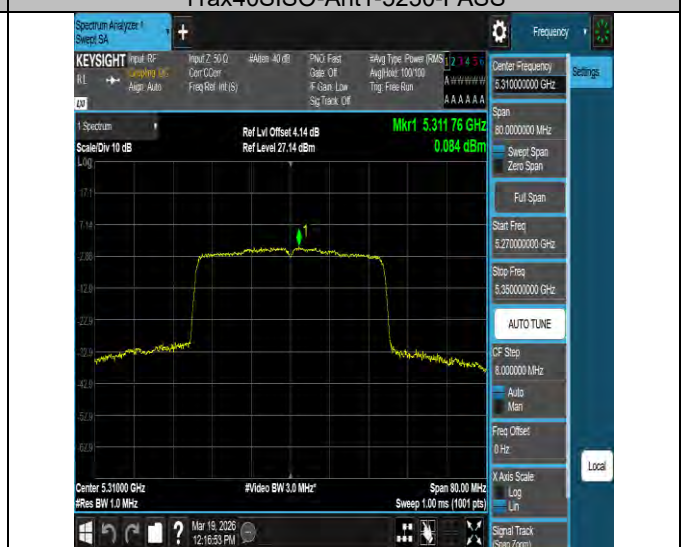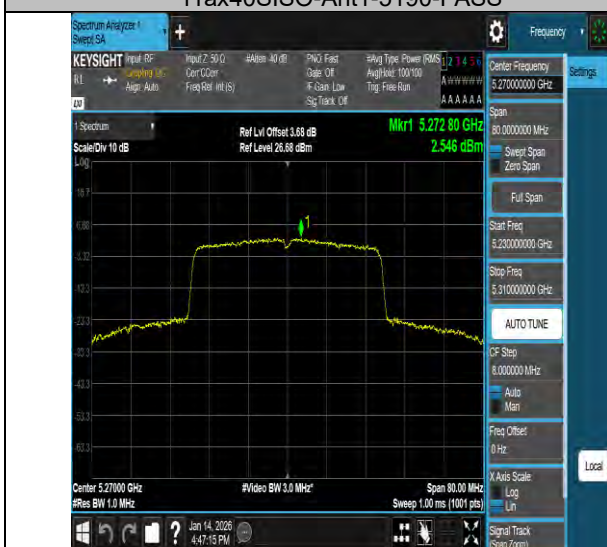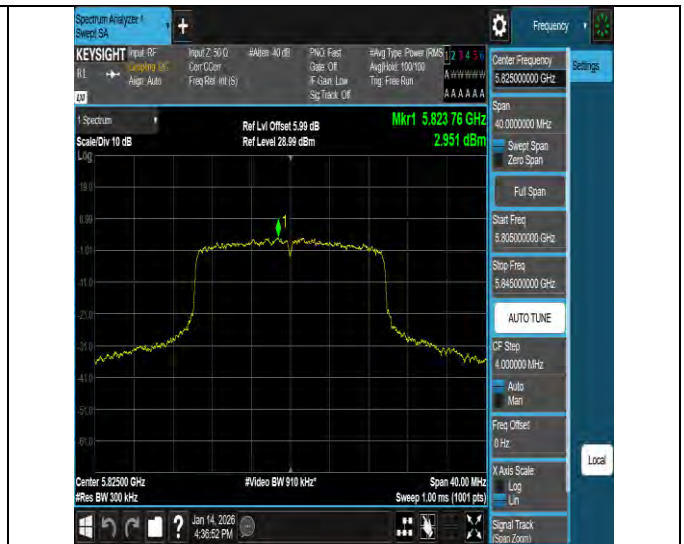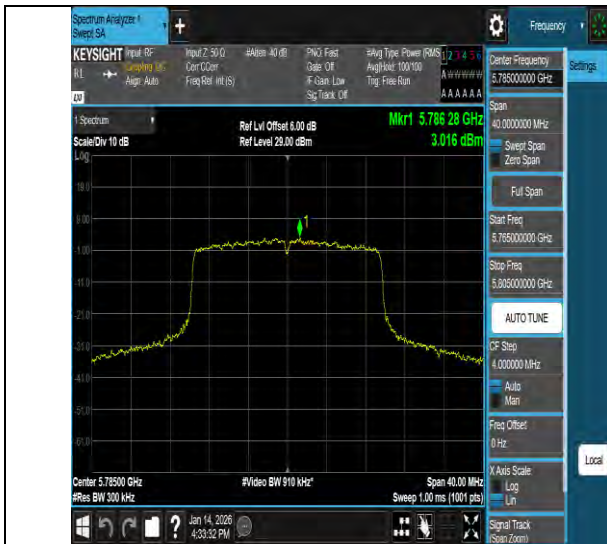



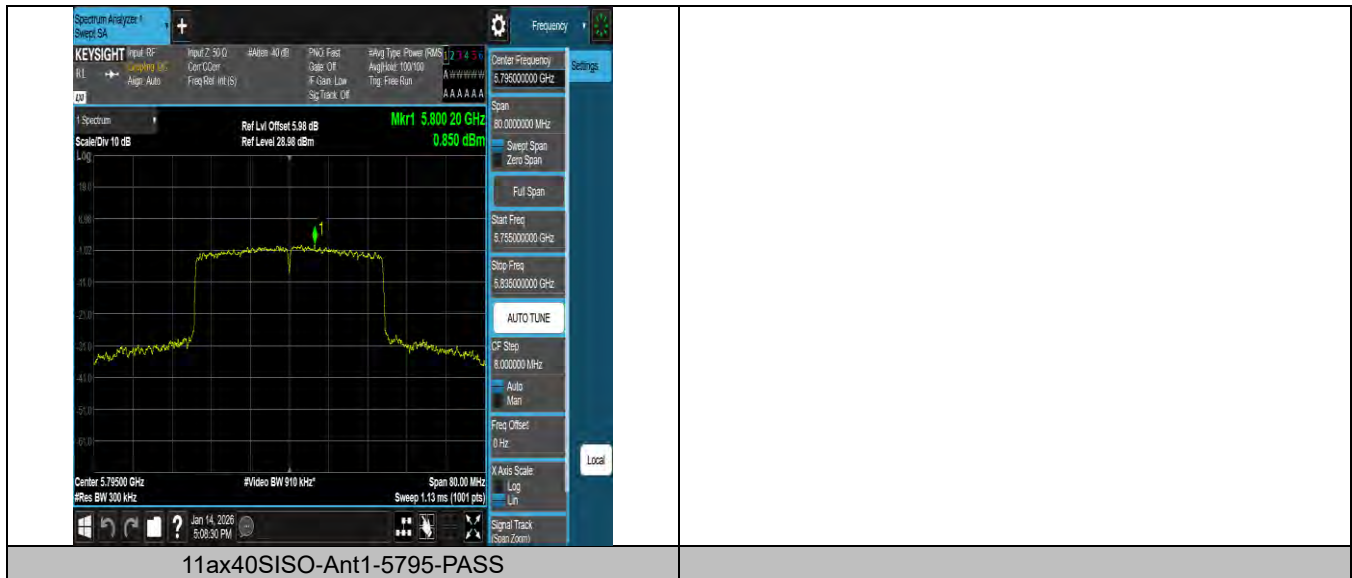


Radiated Spurious Emissions

Test Result Below 1GHz


Project Information			
Mode:	802.11a	Band:	5G WIFI
Bandwidth	20MHz	Channel	36
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

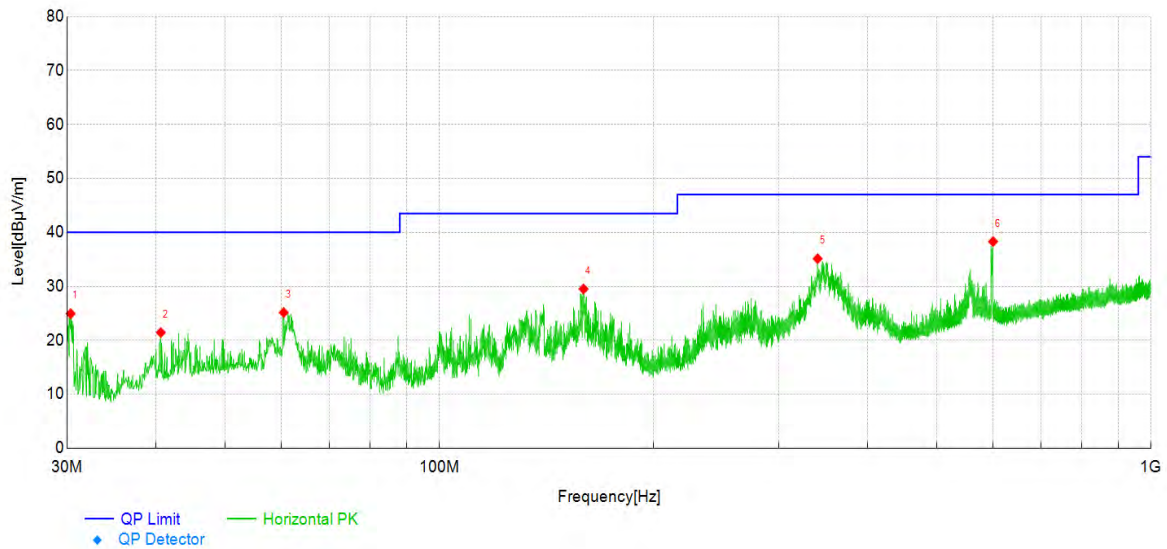

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	30.34	55.37	-30.43	24.94	40.00	15.06	PK	Horizontal	PASS
2	40.62	49.88	-28.44	21.44	40.00	18.56	PK	Horizontal	PASS
3	60.46	51.72	-26.57	25.15	40.00	14.85	PK	Horizontal	PASS
4	159.45	59.38	-29.87	29.51	43.50	13.99	PK	Horizontal	PASS
5	340.03	57.62	-22.50	35.12	47.00	11.88	PK	Horizontal	PASS
6	599.90	54.66	-16.36	38.30	47.00	8.70	PK	Horizontal	PASS

Project Information			
Mode:	802.11a	Band:	5G WIFI
Bandwidth	20MHz	Channel	36
SN:	-	Engineer:	Oushuyan
Remark:			

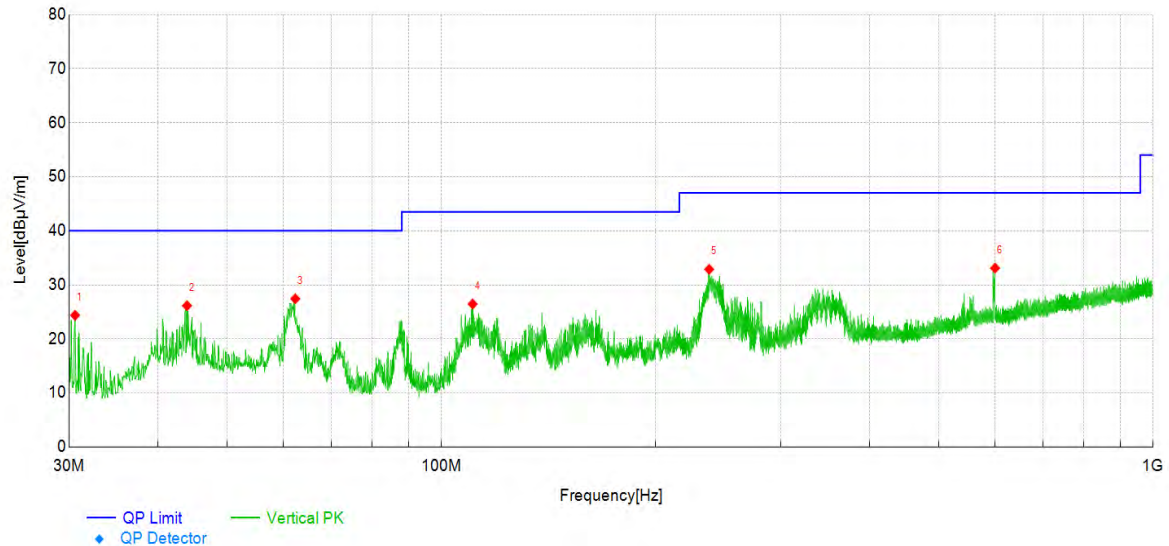
Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	30.58	55.01	-30.64	24.37	40.00	15.63	PK	Vertical	PASS
2	43.92	53.15	-27.01	26.14	40.00	13.86	PK	Vertical	PASS
3	62.35	54.11	-26.67	27.44	40.00	12.56	PK	Vertical	PASS
4	110.66	56.71	-30.25	26.46	43.50	17.04	PK	Vertical	PASS
5	237.88	57.94	-25.07	32.87	47.00	14.13	PK	Vertical	PASS
6	599.85	49.46	-16.36	33.10	47.00	13.90	PK	Vertical	PASS

Test Result Above 1GHz


Project Information			
Mode:	802.11a	Band:	U-NII-1
Bandwidth	20MHz	Channel	36
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

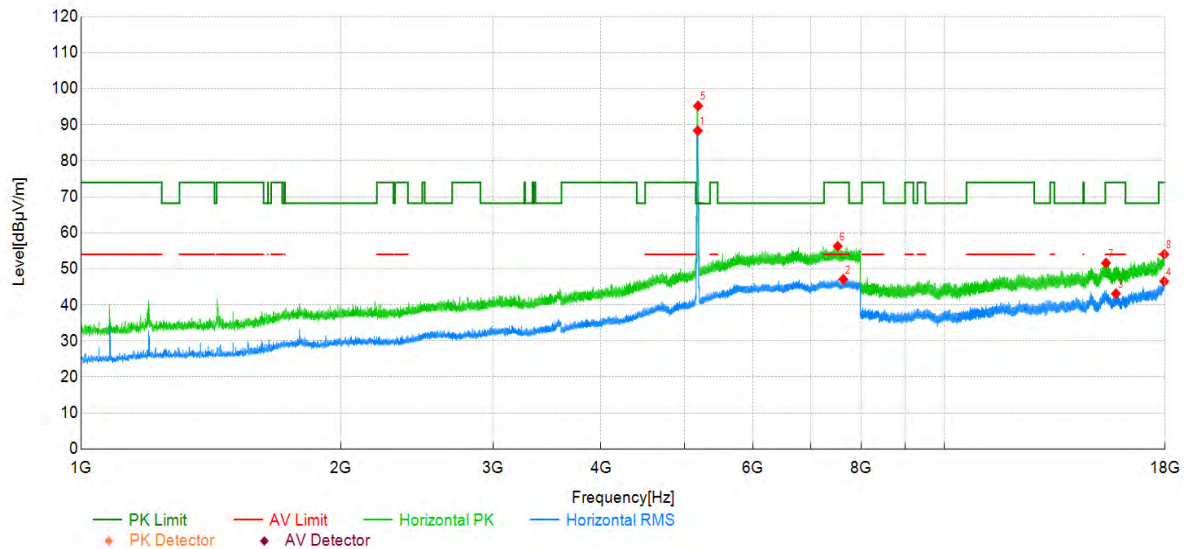

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5178.30	78.44	9.90	88.34	-	-	RMS	Horizontal	NA
2	7632.85	31.07	16.03	47.10	54.00	6.90	RMS	Horizontal	PASS
3	15789.00	31.83	11.29	43.12	54.00	10.88	RMS	Horizontal	PASS
4	17962.33	29.96	16.57	46.53	54.00	7.47	RMS	Horizontal	PASS
5	5181.45	85.33	9.89	95.22	-	-	PK	Horizontal	NA
6	7519.45	39.69	16.58	56.27	74.00	17.73	PK	Horizontal	PASS
7	15378.67	39.71	11.91	51.62	74.00	22.38	PK	Horizontal	PASS
8	17968.33	37.43	16.62	54.05	74.00	19.95	PK	Horizontal	PASS


Project Information			
Mode:	802.11a	Band:	U-NII-1
Bandwidth	20MHz	Channel	36
SN:	-	Engineer:	Oushuyan
Remark:			

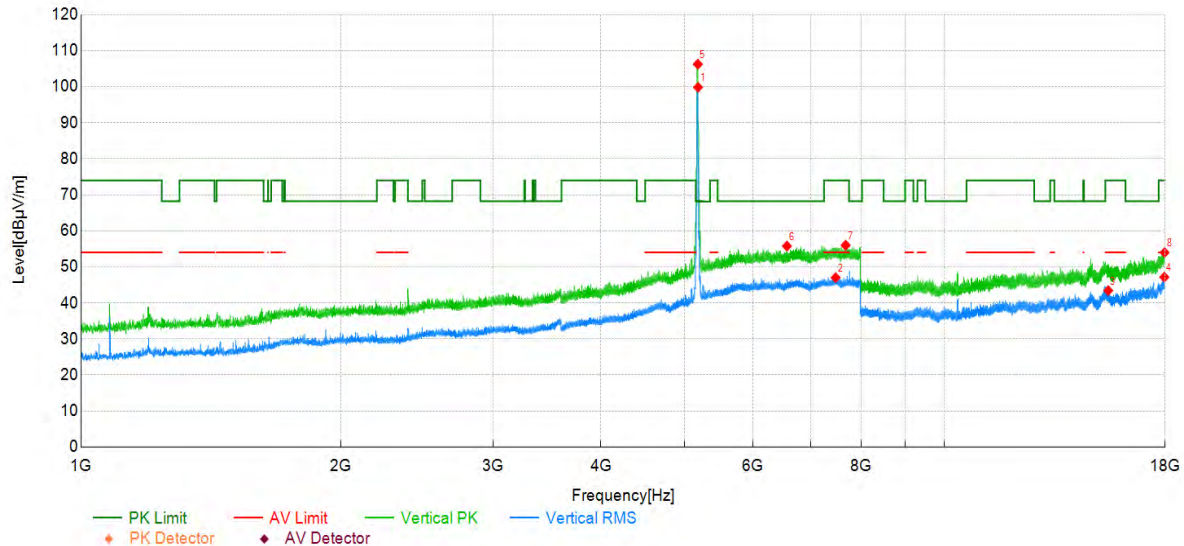Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5181.45	89.93	9.89	99.82	-	-	RMS	Vertical	NA
2	7477.45	30.30	16.69	46.99	54.00	7.01	RMS	Vertical	PASS
3	15470.00	31.54	11.88	43.42	54.00	10.58	RMS	Vertical	PASS
4	17965.00	30.55	16.59	47.14	54.00	6.86	RMS	Vertical	PASS
5	5178.30	96.33	9.90	106.23	-	-	PK	Vertical	NA
6	6567.10	41.55	14.21	55.76	68.20	12.44	PK	Vertical	PASS
7	7680.10	39.73	16.27	56.00	74.00	18.00	PK	Vertical	PASS
8	17977.67	37.28	16.69	53.97	74.00	20.03	PK	Vertical	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-1
Bandwidth	20MHz	Channel	40
SN:	-	Engineer:	Oushuyan
Remark:			


Test Graph

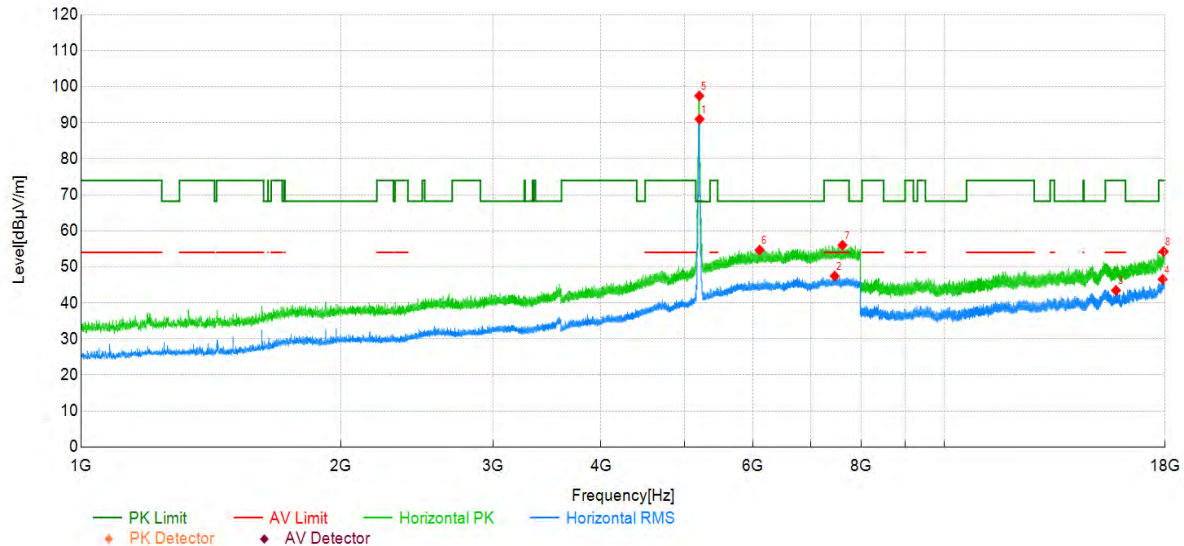

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5201.75	81.11	9.87	90.98	-	-	RMS	Horizontal	NA
2	7459.60	30.78	16.67	47.45	54.00	6.55	RMS	Horizontal	PASS
3	15792.00	32.17	11.29	43.46	54.00	10.54	RMS	Horizontal	PASS
4	17885.67	30.54	16.02	46.56	54.00	7.44	RMS	Horizontal	PASS
5	5198.60	87.57	9.87	97.44	-	-	PK	Horizontal	NA
6	6106.15	41.74	12.91	54.65	68.20	13.55	PK	Horizontal	PASS
7	7615.00	40.03	15.97	56.00	74.00	18.00	PK	Horizontal	PASS
8	17936.00	37.88	16.37	54.25	74.00	19.75	PK	Horizontal	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-1
Bandwidth	20MHz	Channel	40
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

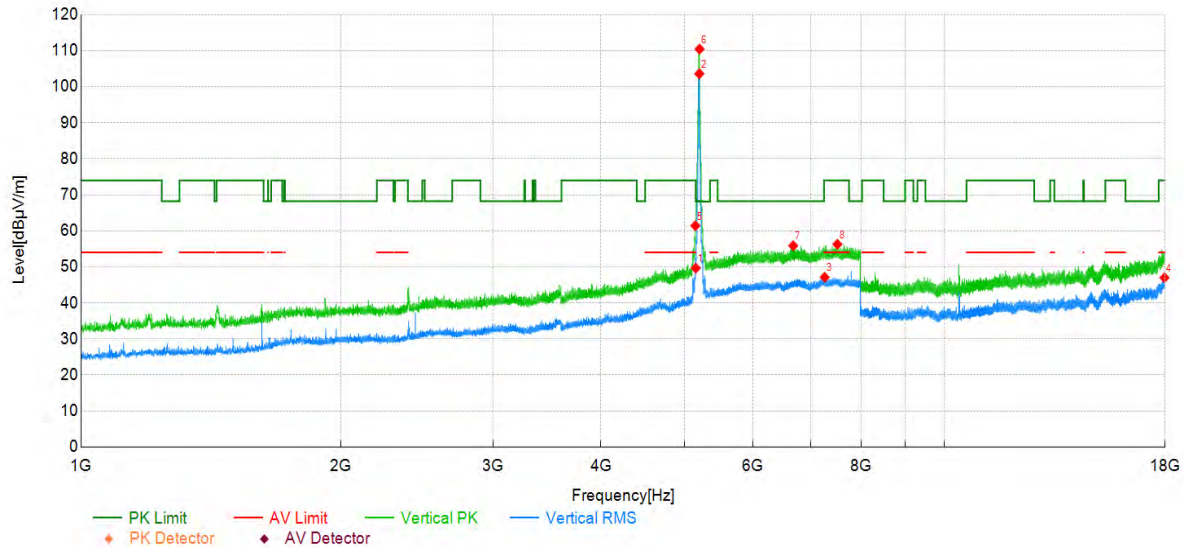


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5149.60	39.70	9.94	49.64	54.00	4.36	RMS	Vertical	PASS
2	5198.95	93.74	9.86	103.60	-	-	RMS	Vertical	NA
3	7262.90	30.89	16.22	47.11	54.00	6.89	RMS	Vertical	PASS
4	17970.67	30.35	16.63	46.98	54.00	7.02	RMS	Vertical	PASS
5	5144.00	51.48	9.93	61.41	74.00	12.59	PK	Vertical	PASS
6	5201.75	100.56	9.87	110.43	-	-	PK	Vertical	NA
7	6677.70	41.07	14.80	55.87	68.20	12.33	PK	Vertical	PASS
8	7512.80	39.65	16.62	56.27	74.00	17.73	PK	Vertical	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-1
Bandwidth	20MHz	Channel	48
SN:	-	Engineer:	Oushuyan
Remark:			


Test Graph

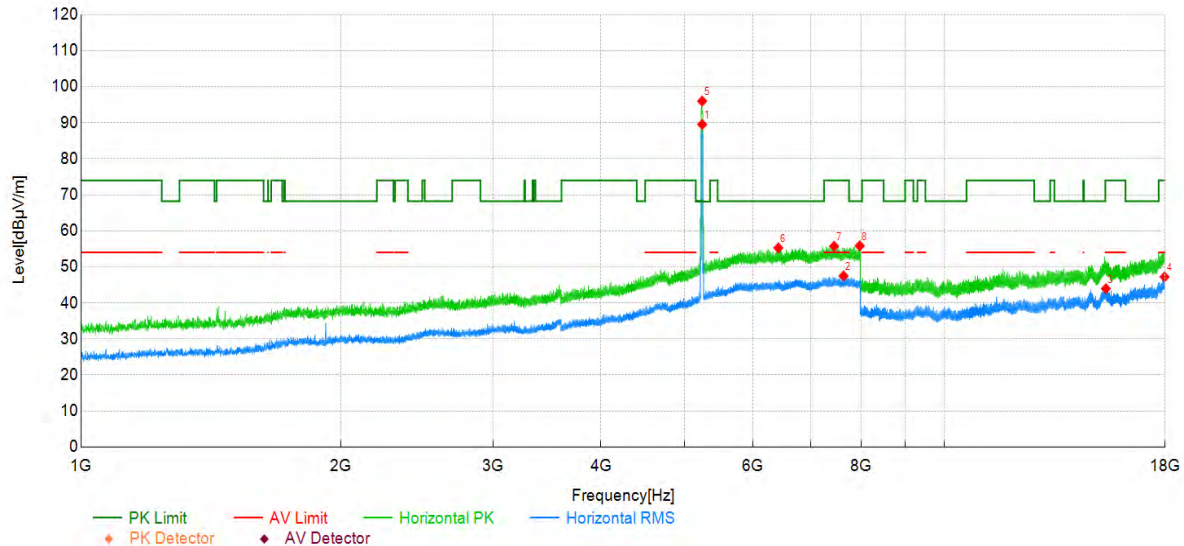

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5238.15	79.50	10.02	89.52	-	-	RMS	Horizontal	NA
2	7637.40	31.42	16.06	47.48	54.00	6.52	RMS	Horizontal	PASS
3	15373.00	32.03	11.91	43.94	54.00	10.06	RMS	Horizontal	PASS
4	17976.33	30.52	16.68	47.20	54.00	6.80	RMS	Horizontal	PASS
5	5238.50	85.96	10.02	95.98	-	-	PK	Horizontal	NA
6	6417.65	41.25	14.03	55.28	68.20	12.92	PK	Horizontal	PASS
7	7447.00	39.09	16.63	55.72	74.00	18.28	PK	Horizontal	PASS
8	7973.05	39.21	16.60	55.81	68.20	12.39	PK	Horizontal	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-1
Bandwidth	20MHz	Channel	48
SN:	-	Engineer:	Oushuyan
Remark:			


Test Graph

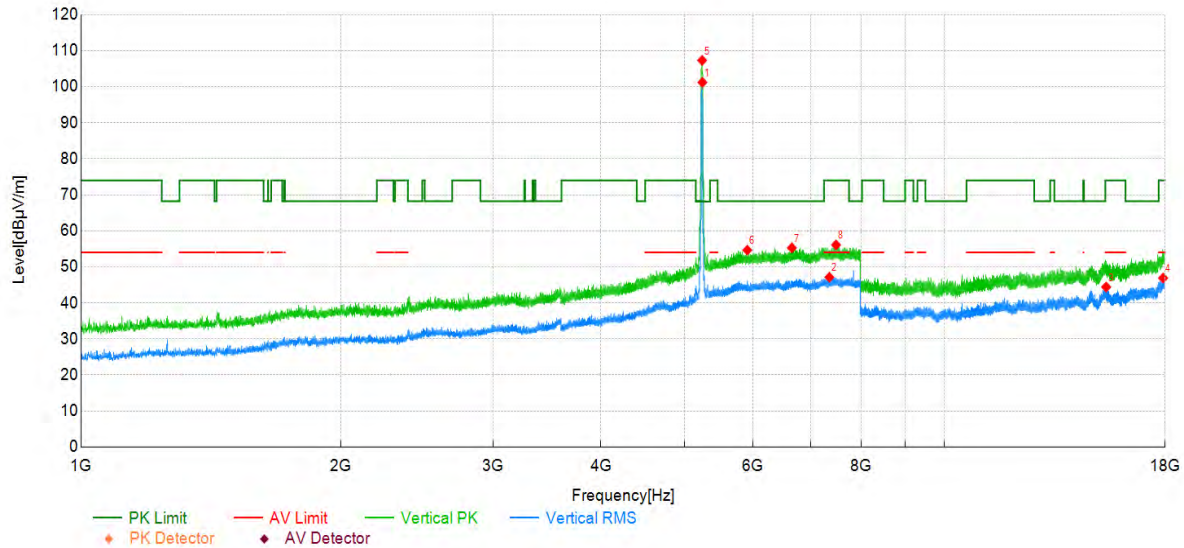

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5241.65	91.16	10.04	101.20	-	-	RMS	Vertical	NA
2	7354.60	30.78	16.35	47.13	54.00	6.87	RMS	Vertical	PASS
3	15386.67	32.51	11.89	44.40	54.00	9.60	RMS	Vertical	PASS
4	17907.67	30.73	16.16	46.89	54.00	7.11	RMS	Vertical	PASS
5	5237.80	97.29	10.02	107.31	-	-	PK	Vertical	NA
6	5908.75	41.38	13.26	54.64	68.20	13.56	PK	Vertical	PASS
7	6653.90	40.54	14.73	55.27	68.20	12.93	PK	Vertical	PASS
8	7485.50	39.39	16.70	56.09	74.00	17.91	PK	Vertical	PASS


Project Information			
Mode:	802.11ac20	Band:	U-NII-1
Bandwidth	20MHz	Channel	48
SN:	-	Engineer:	Oushuyan
Remark:			

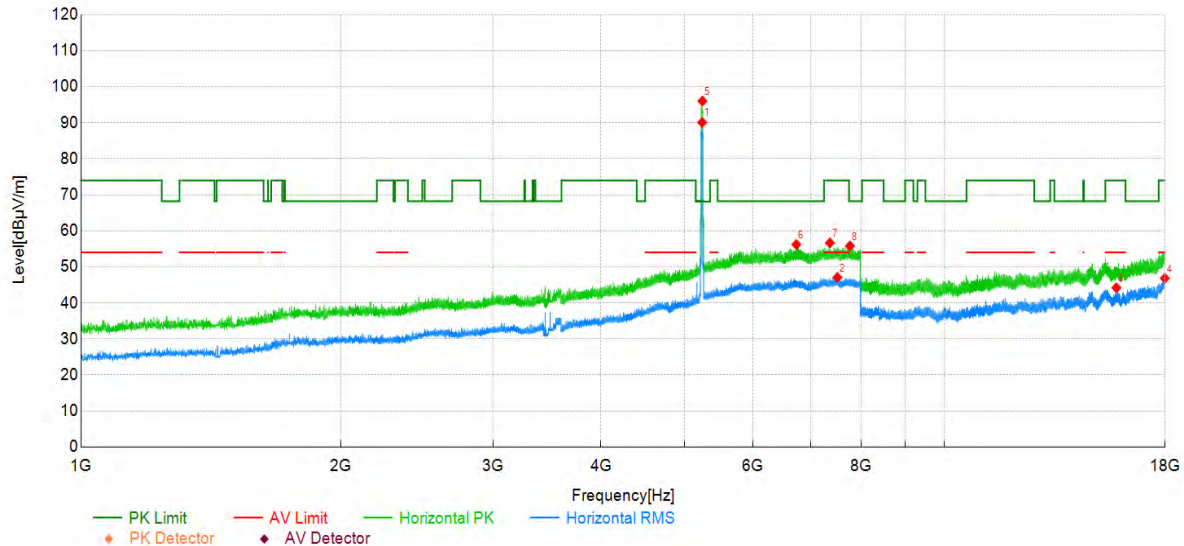Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5238.85	80.05	10.03	90.08	-	-	RMS	Horizontal	NA
2	7513.15	30.47	16.62	47.09	54.00	6.91	RMS	Horizontal	PASS
3	15810.33	32.85	11.35	44.20	54.00	9.80	RMS	Horizontal	PASS
4	17988.33	30.07	16.77	46.84	54.00	7.16	RMS	Horizontal	PASS
5	5242.35	85.97	10.04	96.01	-	-	PK	Horizontal	NA
6	6734.40	41.25	14.95	56.20	68.20	12.00	PK	Horizontal	PASS
7	7364.40	40.34	16.32	56.66	74.00	17.34	PK	Horizontal	PASS
8	7767.60	39.24	16.55	55.79	68.20	12.41	PK	Horizontal	PASS

Project Information			
Mode:	802.11ac20	Band:	U-NII-1
Bandwidth	20MHz	Channel	48
SN:	-	Engineer:	Oushuyan
Remark:			


Test Graph

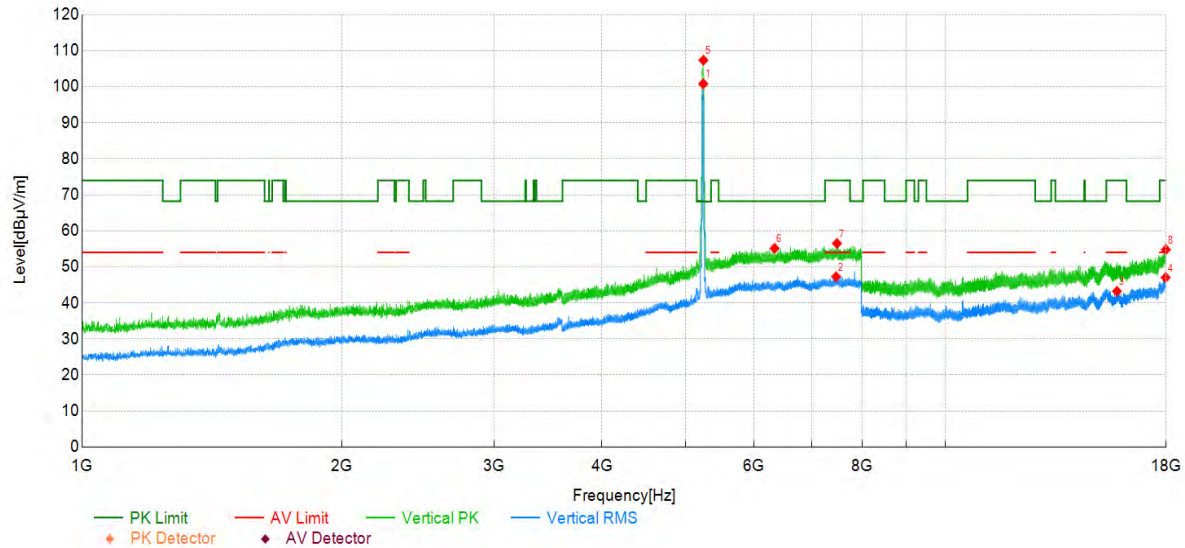

Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5239.55	90.76	10.03	100.79	-	-	RMS	Vertical	NA
2	7467.30	30.59	16.68	47.27	54.00	6.73	RMS	Vertical	PASS
3	15791.33	31.94	11.29	43.23	54.00	10.77	RMS	Vertical	PASS
4	17978.67	30.35	16.69	47.04	54.00	6.96	RMS	Vertical	PASS
5	5242.70	97.31	10.04	107.35	-	-	PK	Vertical	NA
6	6337.50	41.75	13.39	55.14	68.20	13.06	PK	Vertical	PASS
7	7484.10	39.82	16.69	56.51	74.00	17.49	PK	Vertical	PASS
8	17992.33	37.99	16.80	54.79	74.00	19.21	PK	Vertical	PASS

Project Information			
Mode:	802.11ac40	Band:	U-NII-1
Bandwidth	40MHz	Channel	46
SN:	-	Engineer:	Oushuyan
Remark:			

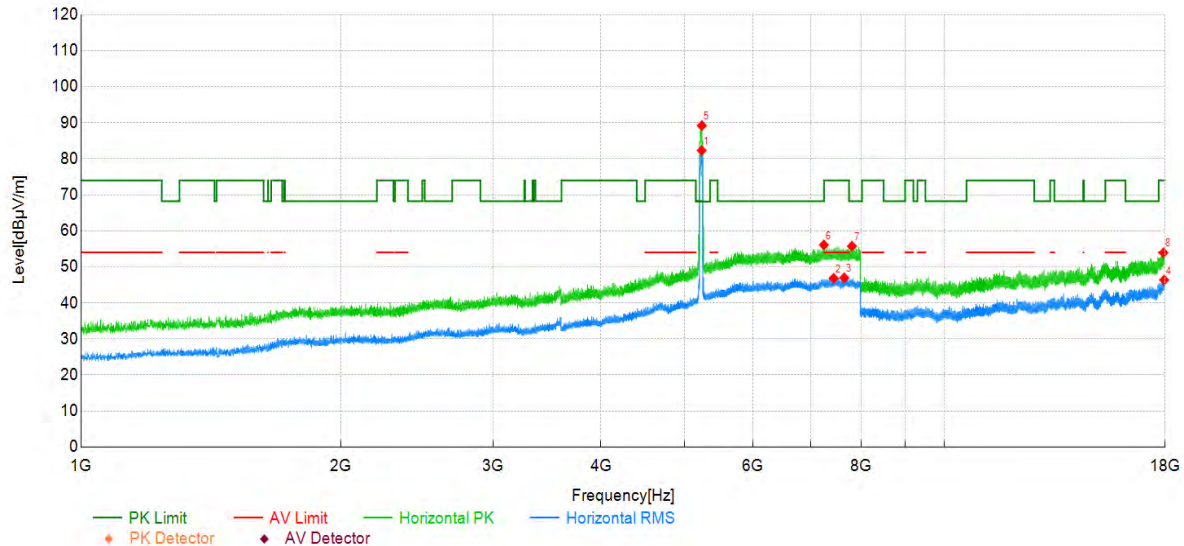Test Graph


Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5232.20	72.30	10.00	82.30	-	-	RMS	Horizontal	NA
2	7440.00	30.26	16.57	46.83	54.00	7.17	RMS	Horizontal	PASS
3	7651.75	30.82	16.11	46.93	54.00	7.07	RMS	Horizontal	PASS
4	17957.00	29.82	16.54	46.36	54.00	7.64	RMS	Horizontal	PASS
5	5233.95	79.19	10.01	89.20	-	-	PK	Horizontal	NA
6	7247.15	39.83	16.25	56.08	68.20	12.12	PK	Horizontal	PASS
7	7808.90	39.20	16.54	55.74	68.20	12.46	PK	Horizontal	PASS
8	17926.00	37.62	16.29	53.91	74.00	20.09	PK	Horizontal	PASS

Project Information			
Mode:	802.11ac40	Band:	U-NII-1
Bandwidth	40MHz	Channel	46
SN:	-	Engineer:	Oushuyan
Remark:			

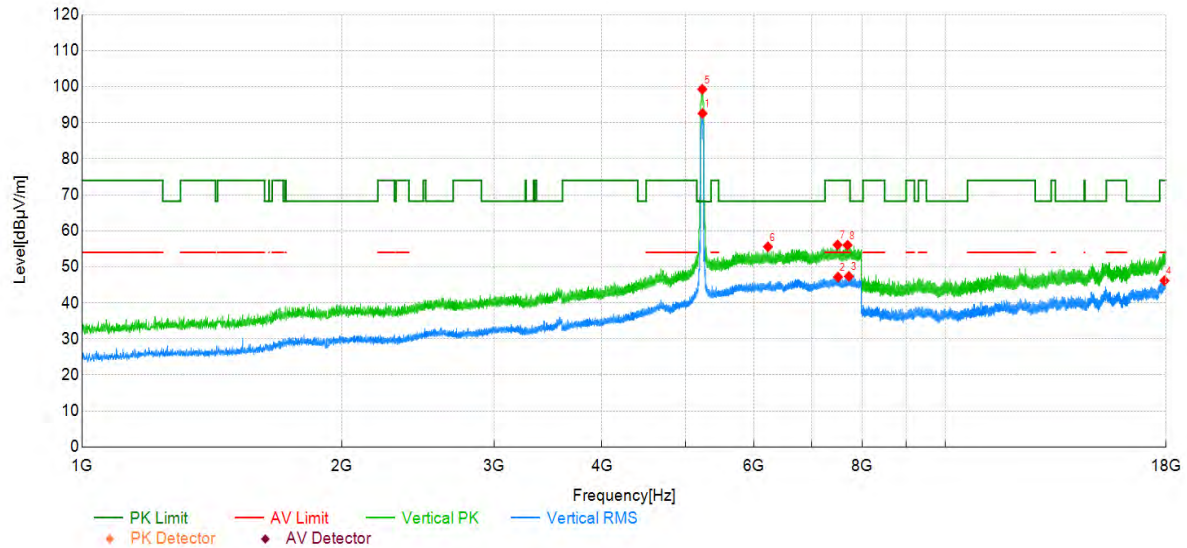Test Graph**Data List**


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5229.05	82.58	9.99	92.57	-	-	RMS	Vertical	NA
2	7505.10	30.49	16.67	47.16	54.00	6.84	RMS	Vertical	PASS
3	7725.60	30.88	16.47	47.35	54.00	6.65	RMS	Vertical	PASS
4	17925.67	29.86	16.29	46.15	54.00	7.85	RMS	Vertical	PASS
5	5226.25	89.29	9.98	99.27	-	-	PK	Vertical	NA
6	6225.85	42.26	13.31	55.57	68.20	12.63	PK	Vertical	PASS
7	7496.70	39.40	16.70	56.10	74.00	17.90	PK	Vertical	PASS
8	7699.35	39.64	16.38	56.02	74.00	17.98	PK	Vertical	PASS

Project Information			
Mode:	802.11ax20	Band:	U-NII-1
Bandwidth	20MHz	Channel	48
SN:	-	Engineer:	Oushuyan
Remark:			

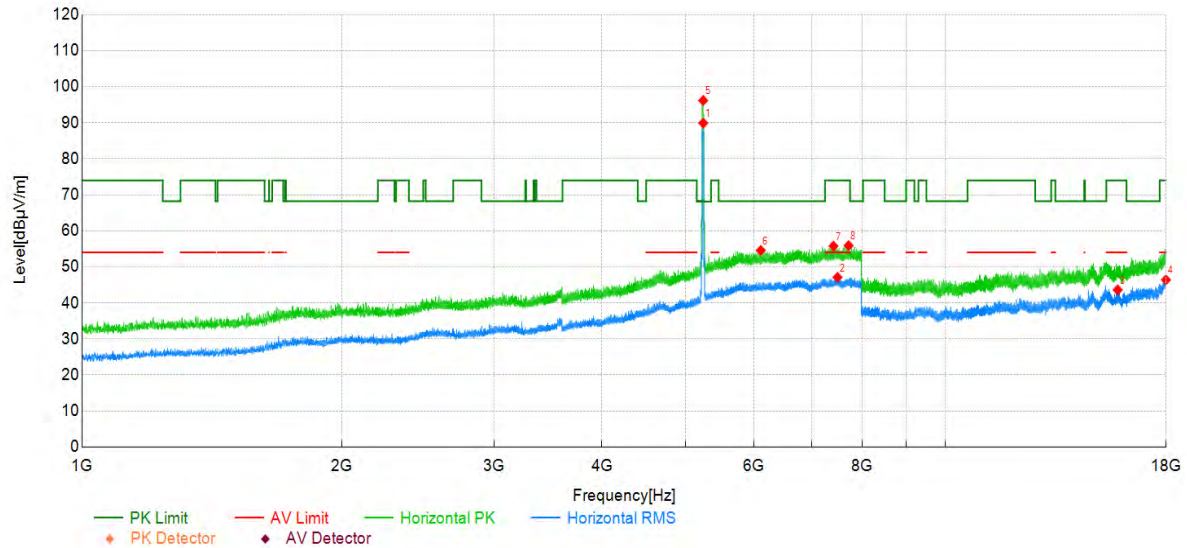Test Graph


Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5239.55	79.87	10.03	89.90	-	-	RMS	Horizontal	NA
2	7496.00	30.39	16.71	47.10	54.00	6.90	RMS	Horizontal	PASS
3	15822.00	32.20	11.41	43.61	54.00	10.39	RMS	Horizontal	PASS
4	17996.67	29.57	16.84	46.41	54.00	7.59	RMS	Horizontal	PASS
5	5238.50	86.14	10.02	96.16	-	-	PK	Horizontal	NA
6	6108.60	41.62	12.93	54.55	68.20	13.65	PK	Horizontal	PASS
7	7414.45	39.42	16.34	55.76	74.00	18.24	PK	Horizontal	PASS
8	7720.00	39.44	16.45	55.89	74.00	18.11	PK	Horizontal	PASS

Project Information			
Mode:	802.11ax20	Band:	U-NII-1
Bandwidth	20MHz	Channel	48
SN:	-	Engineer:	Oushuyan
Remark:			

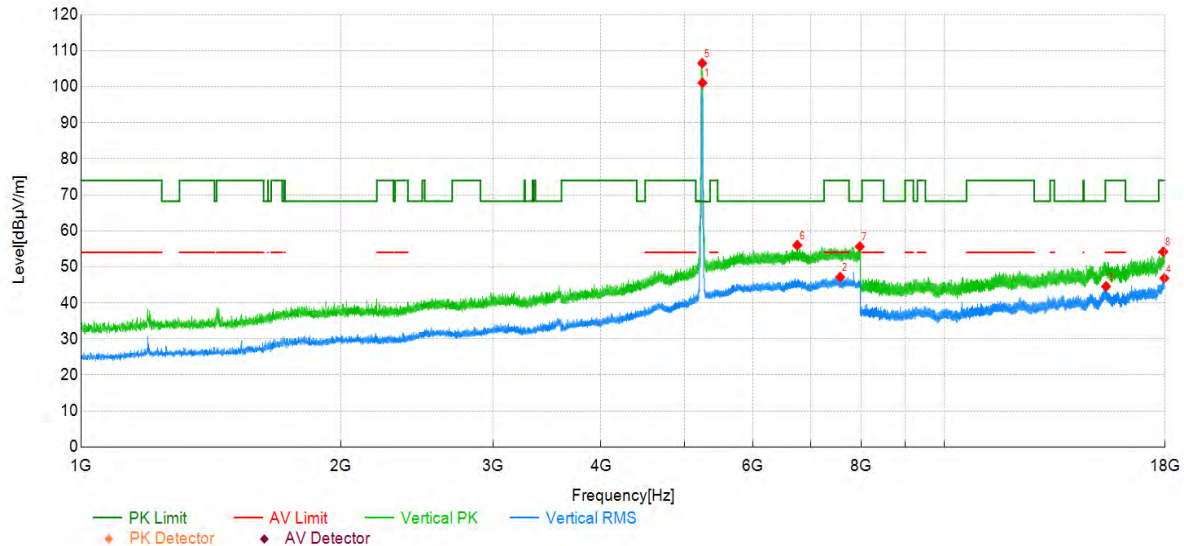Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5241.65	91.02	10.04	101.06	-	-	RMS	Vertical	NA
2	7569.85	30.96	16.19	47.15	54.00	6.85	RMS	Vertical	PASS
3	15381.33	32.66	11.90	44.56	54.00	9.44	RMS	Vertical	PASS
4	17971.00	30.21	16.64	46.85	54.00	7.15	RMS	Vertical	PASS
5	5238.85	96.49	10.03	106.52	-	-	PK	Vertical	NA
6	6751.20	40.99	15.00	55.99	68.20	12.21	PK	Vertical	PASS
7	7975.85	39.03	16.59	55.62	68.20	12.58	PK	Vertical	PASS
8	17918.00	37.97	16.23	54.20	74.00	19.80	PK	Vertical	PASS


Project Information			
Mode:	802.11ax40	Band:	U-NII-1
Bandwidth	40MHz	Channel	48
SN:	-	Engineer:	Oushuyan
Remark:			

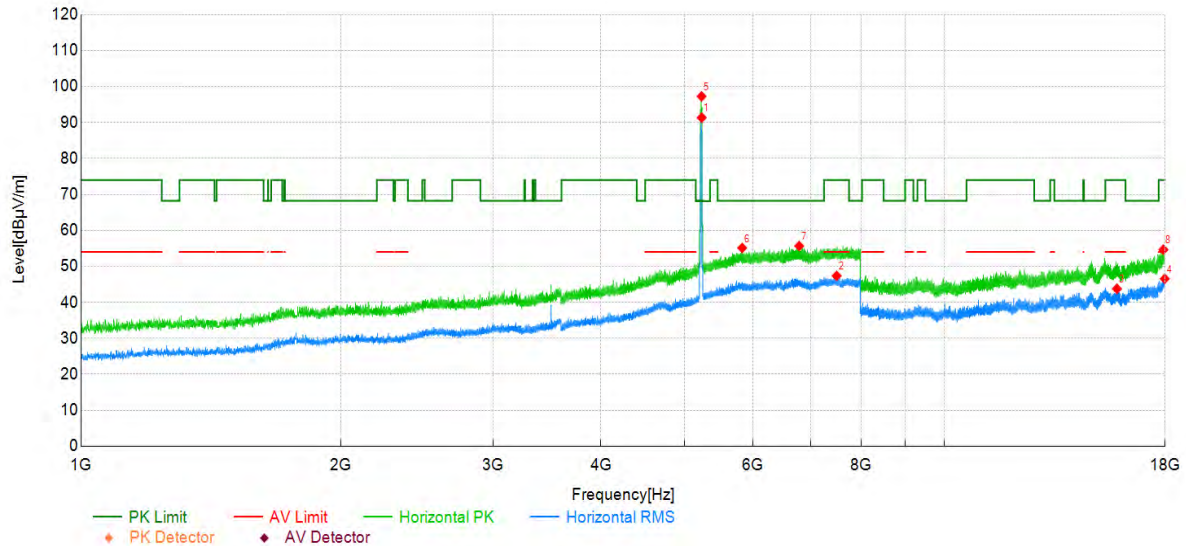Test Graph**Data List**

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5231.85	81.33	10.00	91.33	-	-	RMS	Horizontal	NA
2	7497.05	30.65	16.71	47.36	54.00	6.64	RMS	Horizontal	PASS
3	15833.00	32.28	11.47	43.75	54.00	10.25	RMS	Horizontal	PASS
4	17986.33	29.79	16.76	46.55	54.00	7.45	RMS	Horizontal	PASS
5	5230.10	87.25	9.99	97.24	-	-	PK	Horizontal	NA
6	5828.25	41.52	13.59	55.11	68.20	13.09	PK	Horizontal	PASS
7	6785.15	40.64	15.02	55.66	68.20	12.54	PK	Horizontal	PASS
8	17921.33	38.36	16.27	54.63	74.00	19.37	PK	Horizontal	PASS


Project Information			
Mode:	802.11ax40	Band:	U-NII-1
Bandwidth	40MHz	Channel	48
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

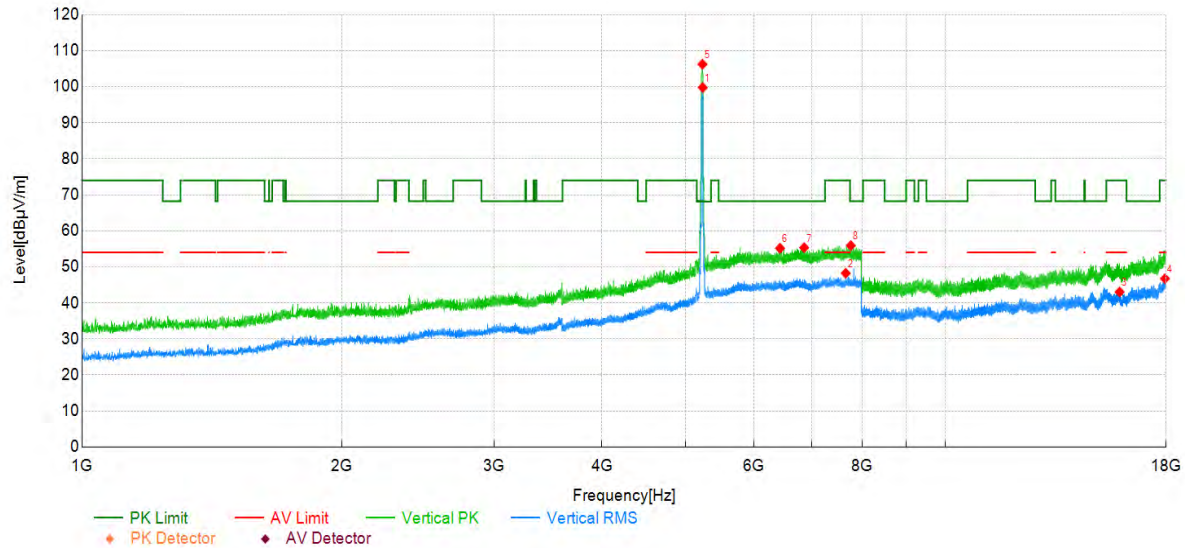


Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5232.55	89.77	10.00	99.77	-	-	RMS	Vertical	NA
2	7660.85	31.66	16.16	47.72	54.00	6.28	RMS	Vertical	PASS
3	15904.67	31.26	11.78	43.04	54.00	10.96	RMS	Vertical	PASS
4	17946.67	30.26	16.46	46.72	54.00	7.28	RMS	Vertical	PASS
5	5228.70	96.24	9.98	106.22	-	-	PK	Vertical	NA
6	6430.60	41.11	14.05	55.16	68.20	13.04	PK	Vertical	PASS
7	6857.25	40.25	15.08	55.33	68.20	12.87	PK	Vertical	PASS
8	7765.85	39.33	16.56	55.89	68.20	12.31	PK	Vertical	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-2A
Bandwidth	20MHz	Channel	52
SN:	-	Engineer:	Oushuyan
Remark:			

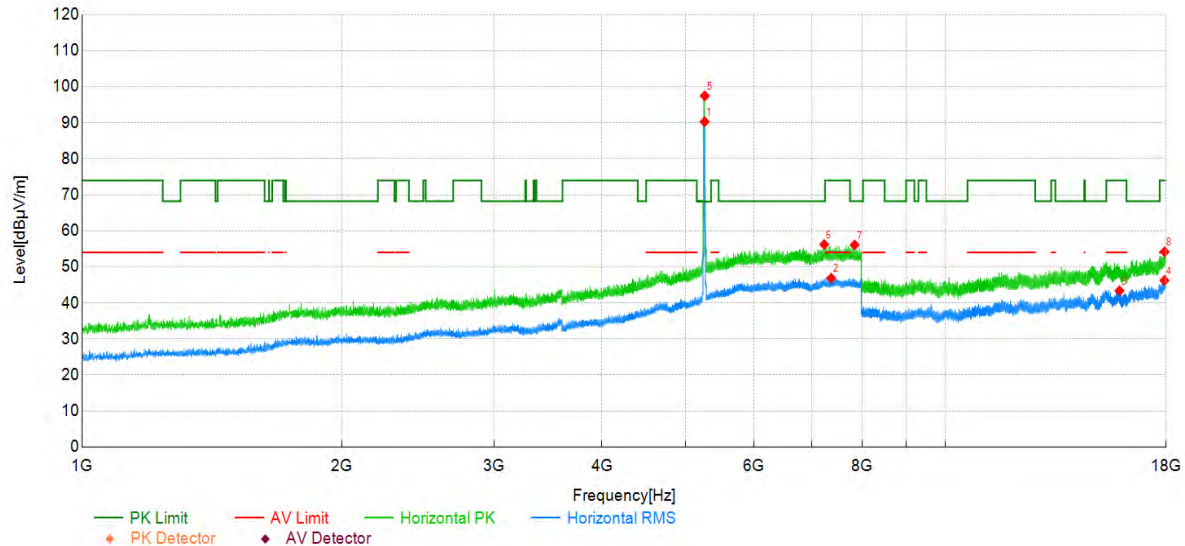Test Graph


Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5258.45	80.15	10.12	90.27	-	-	RMS	Horizontal	NA
2	7369.30	30.57	16.30	46.87	54.00	7.13	RMS	Horizontal	PASS
3	15895.00	31.57	11.80	43.37	54.00	10.63	RMS	Horizontal	PASS
4	17922.67	29.97	16.27	46.24	54.00	7.76	RMS	Horizontal	PASS
5	5260.90	87.30	10.14	97.44	-	-	PK	Horizontal	NA
6	7234.90	40.02	16.18	56.20	68.20	12.00	PK	Horizontal	PASS
7	7846.70	39.53	16.54	56.07	68.20	12.13	PK	Horizontal	PASS
8	17928.33	37.88	16.31	54.19	74.00	19.81	PK	Horizontal	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-2A
Bandwidth	20MHz	Channel	52
SN:	-	Engineer:	Oushuyan
Remark:			

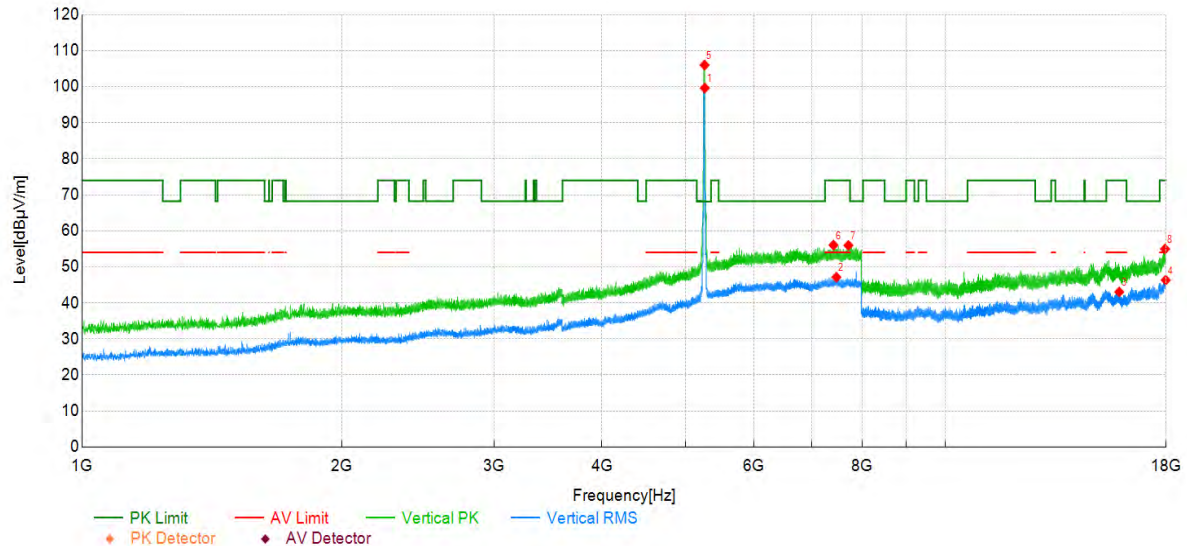Test Graph


Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5261.25	89.49	10.14	99.63	-	-	RMS	Vertical	NA
2	7473.60	30.43	16.69	47.12	54.00	6.88	RMS	Vertical	PASS
3	15889.33	31.26	11.77	43.03	54.00	10.97	RMS	Vertical	PASS
4	17984.67	29.58	16.74	46.32	54.00	7.68	RMS	Vertical	PASS
5	5258.80	95.88	10.12	106.00	-	-	PK	Vertical	NA
6	7416.55	39.67	16.36	56.03	74.00	17.97	PK	Vertical	PASS
7	7717.20	39.52	16.44	55.96	74.00	18.04	PK	Vertical	PASS
8	17951.67	38.45	16.50	54.95	74.00	19.05	PK	Vertical	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-2A
Bandwidth	20MHz	Channel	60
SN:	-	Engineer:	Oushuyan
Remark:			

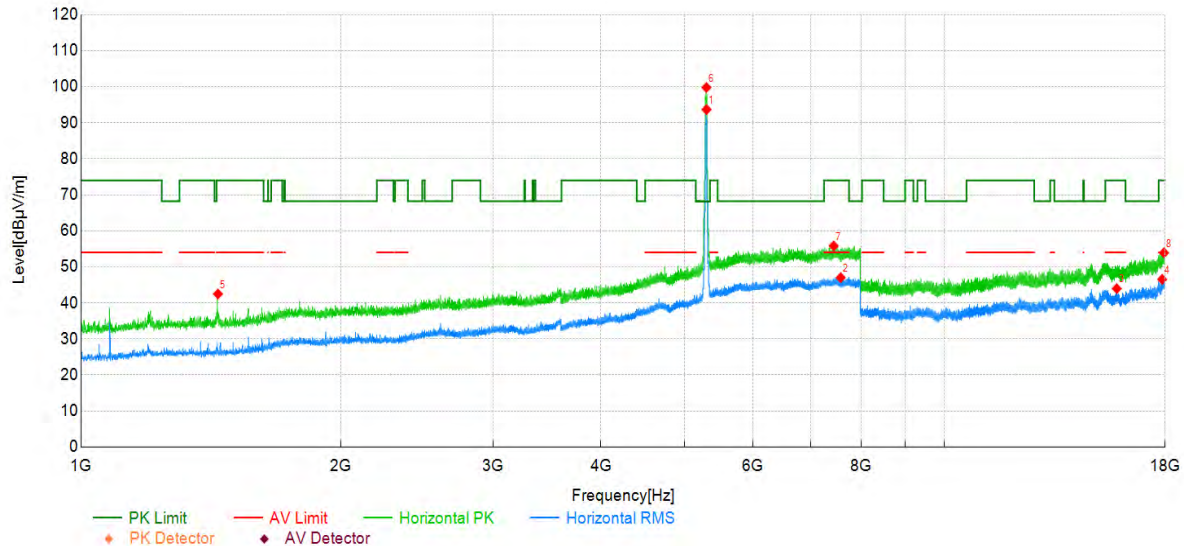Test Graph


Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5299.05	83.29	10.37	93.66	-	-	RMS	Horizontal	NA
2	7578.95	30.89	16.11	47.00	54.00	7.00	RMS	Horizontal	PASS
3	15824.67	32.54	11.42	43.96	54.00	10.04	RMS	Horizontal	PASS
4	17865.67	30.61	15.92	46.53	54.00	7.47	RMS	Horizontal	PASS
5	1440.30	47.47	-5.00	42.47	74.00	31.53	PK	Horizontal	PASS
6	5297.65	89.39	10.37	99.76	-	-	PK	Horizontal	NA
7	7439.30	39.24	16.57	55.81	74.00	18.19	PK	Horizontal	PASS
8	17949.67	37.41	16.48	53.89	74.00	20.11	PK	Horizontal	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-2A
Bandwidth	20MHz	Channel	60
SN:	-	Engineer:	Oushuyan
Remark:			

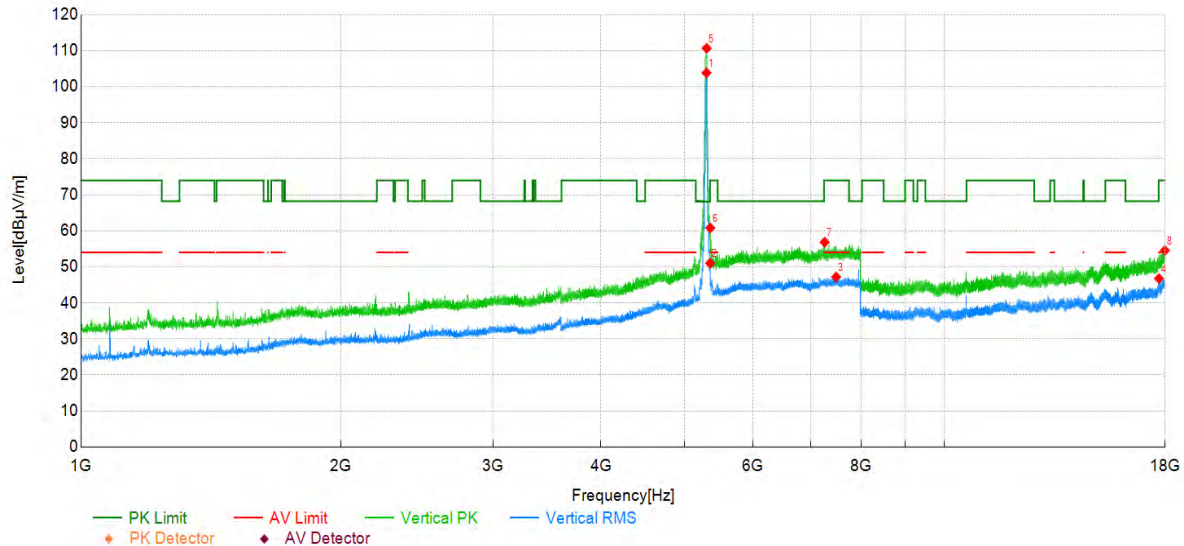Test Graph


Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5299.40	93.47	10.38	103.85	-	-	RMS	Vertical	NA
2	5350.15	40.20	10.80	51.00	54.00	3.00	RMS	Vertical	PASS
3	7487.25	30.49	16.70	47.19	54.00	6.81	RMS	Vertical	PASS
4	17710.33	31.18	15.57	46.75	54.00	7.25	RMS	Vertical	PASS
5	5301.15	100.27	10.39	110.66	-	-	PK	Vertical	NA
6	5352.95	49.98	10.82	60.80	74.00	13.20	PK	Vertical	PASS
7	7262.55	40.63	16.22	56.85	74.00	17.15	PK	Vertical	PASS
8	17991.67	37.76	16.80	54.56	74.00	19.44	PK	Vertical	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-2A
Bandwidth	20MHz	Channel	64
SN:	-	Engineer:	Oushuyan
Remark:			

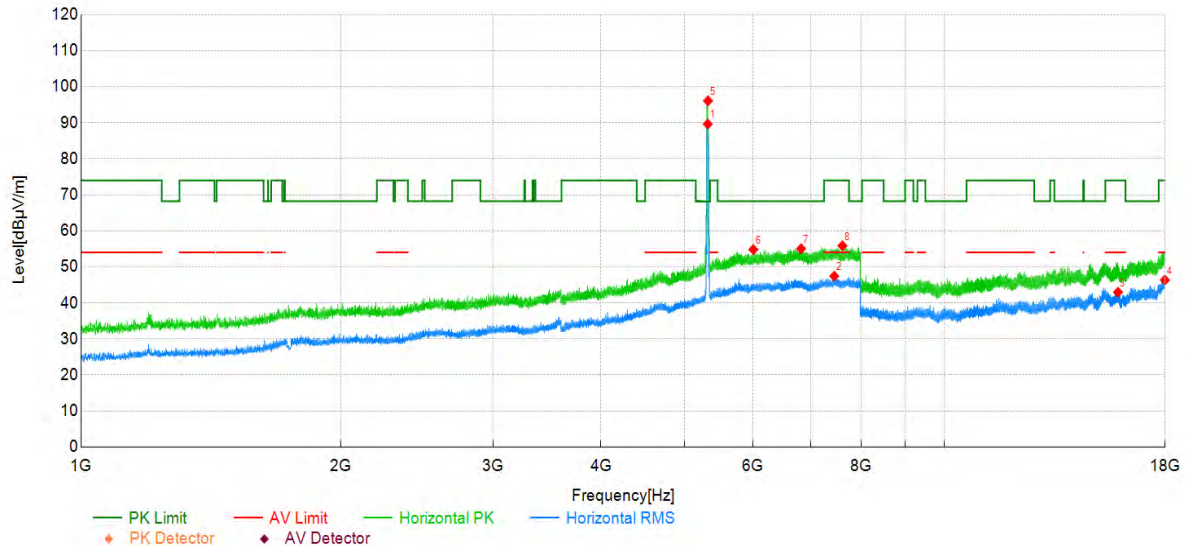Test Graph


Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5317.25	79.10	10.52	89.62	-	-	RMS	Horizontal	NA
2	7451.20	30.74	16.67	47.41	54.00	6.59	RMS	Horizontal	PASS
3	15875.67	31.27	11.70	42.97	54.00	11.03	RMS	Horizontal	PASS
4	17992.00	29.55	16.80	46.35	54.00	7.65	RMS	Horizontal	PASS
5	5321.10	85.52	10.56	96.08	-	-	PK	Horizontal	NA
6	6005.00	41.60	13.20	54.80	68.20	13.40	PK	Horizontal	PASS
7	6820.15	39.98	15.06	55.04	68.20	13.16	PK	Horizontal	PASS
8	7615.00	39.86	15.97	55.83	74.00	18.17	PK	Horizontal	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-2A
Bandwidth	20MHz	Channel	64
SN:	-	Engineer:	Oushuyan
Remark:			

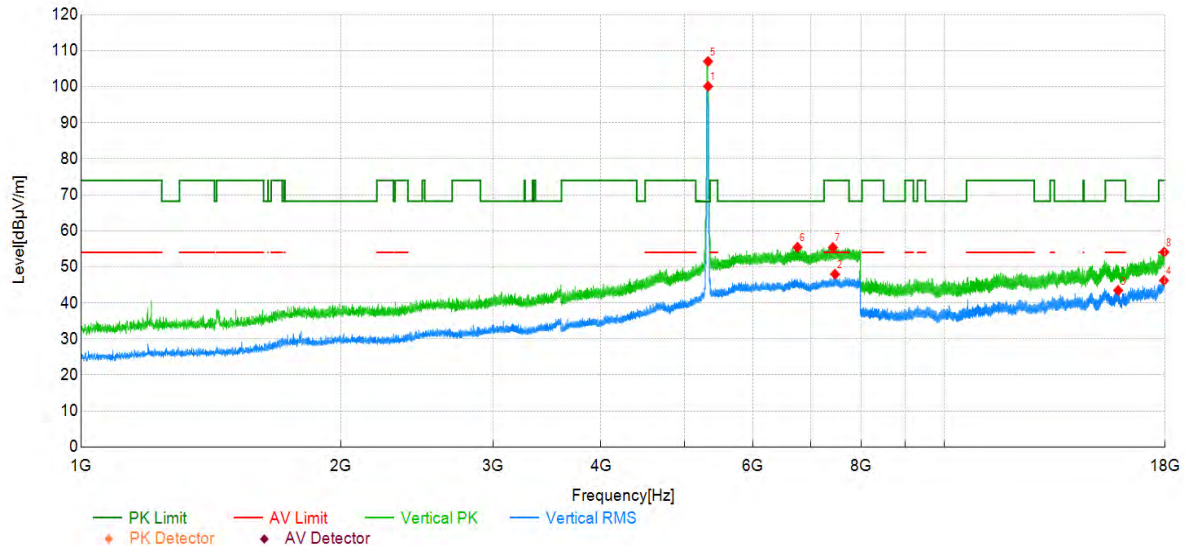Test Graph


Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5321.45	89.51	10.56	100.07	-	-	RMS	Vertical	NA
2	7466.60	31.29	16.67	47.96	54.00	6.04	RMS	Vertical	PASS
3	15884.33	31.70	11.75	43.45	54.00	10.55	RMS	Vertical	PASS
4	17951.00	29.73	16.48	46.21	54.00	7.79	RMS	Vertical	PASS
5	5321.45	96.43	10.56	106.99	-	-	PK	Vertical	NA
6	6755.40	40.42	15.00	55.42	68.20	12.78	PK	Vertical	PASS
7	7424.25	38.94	16.43	55.37	74.00	18.63	PK	Vertical	PASS
8	17965.33	37.50	16.60	54.10	74.00	19.90	PK	Vertical	PASS

Project Information			
Mode:	802.11ac20	Band:	U-NII-2A
Bandwidth	20MHz	Channel	60
SN:	-	Engineer:	Oushuyan
Remark:			

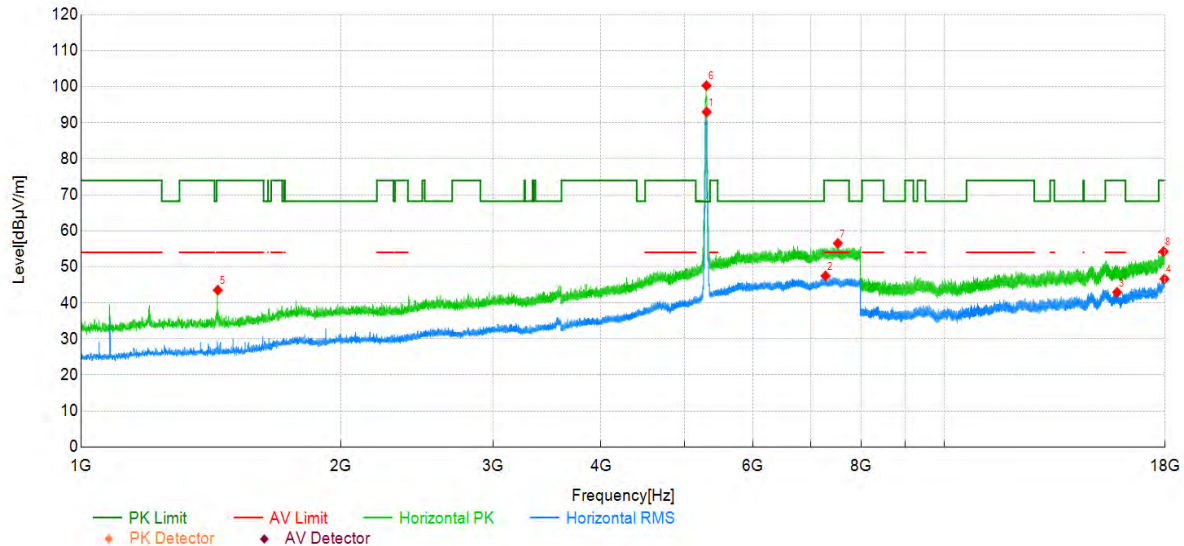Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5301.50	82.59	10.39	92.98	-	-	RMS	Horizontal	NA
2	7279.35	31.33	16.17	47.50	54.00	6.50	RMS	Horizontal	PASS
3	15840.67	31.42	11.51	42.93	54.00	11.07	RMS	Horizontal	PASS
4	17974.33	29.97	16.67	46.64	54.00	7.36	RMS	Horizontal	PASS
5	1439.60	48.56	-5.00	43.56	74.00	30.44	PK	Horizontal	PASS
6	5298.70	89.92	10.37	100.29	-	-	PK	Horizontal	NA
7	7522.95	39.97	16.55	56.52	74.00	17.48	PK	Horizontal	PASS
8	17932.33	37.90	16.35	54.25	74.00	19.75	PK	Horizontal	PASS


Project Information			
Mode:	802.11ac20	Band:	U-NII-2A
Bandwidth	20MHz	Channel	60
SN:	-	Engineer:	Oushuyan
Remark:			

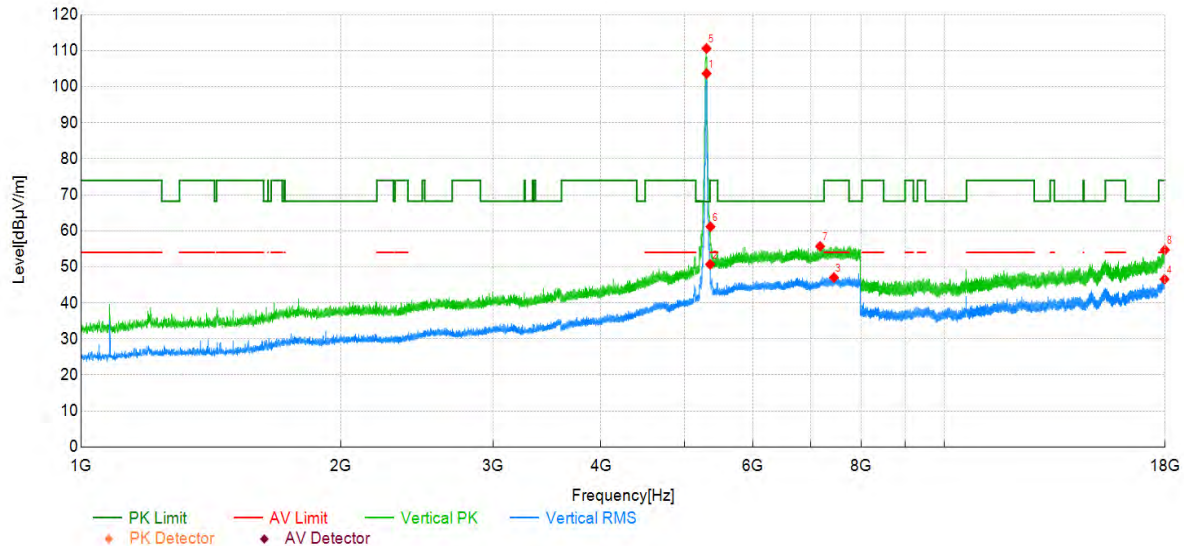Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5300.80	93.26	10.38	103.64	-	-	RMS	Vertical	NA
2	5351.55	39.89	10.81	50.70	54.00	3.30	RMS	Vertical	PASS
3	7442.80	30.44	16.59	47.03	54.00	6.97	RMS	Vertical	PASS
4	17976.67	29.87	16.69	46.56	54.00	7.44	RMS	Vertical	PASS
5	5299.05	100.23	10.37	110.60	-	-	PK	Vertical	NA
6	5356.10	50.30	10.83	61.13	74.00	12.87	PK	Vertical	PASS
7	7175.05	39.89	15.81	55.70	68.20	12.50	PK	Vertical	PASS
8	17997.00	37.85	16.84	54.69	74.00	19.31	PK	Vertical	PASS

Project Information			
Mode:	802.11ac40	Band:	U-NII-2A
Bandwidth	40MHz	Channel	62
SN:	-	Engineer:	Oushuyan
Remark:			


Test Graph

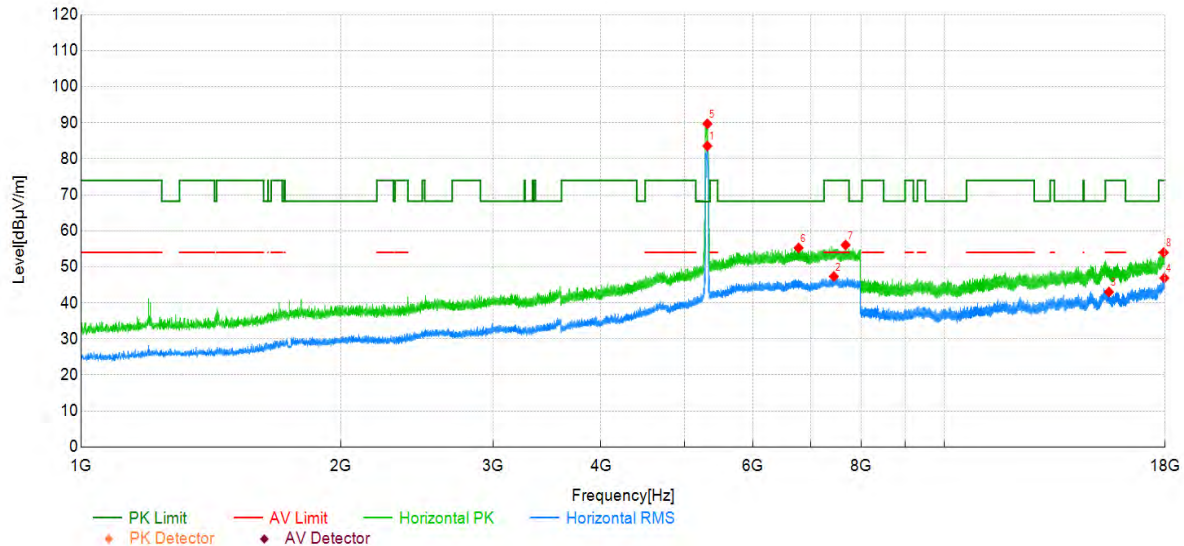

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5312.35	73.06	10.48	83.54	-	-	RMS	Horizontal	NA
2	7442.80	30.73	16.59	47.32	54.00	6.68	RMS	Horizontal	PASS
3	15497.00	31.14	11.88	43.02	54.00	10.98	RMS	Horizontal	PASS
4	17966.67	30.27	16.61	46.88	54.00	7.12	RMS	Horizontal	PASS
5	5312.00	79.20	10.48	89.68	-	-	PK	Horizontal	NA
6	6775.35	40.25	15.01	55.26	68.20	12.94	PK	Horizontal	PASS
7	7679.75	39.80	16.27	56.07	74.00	17.93	PK	Horizontal	PASS
8	17937.33	37.59	16.38	53.97	74.00	20.03	PK	Horizontal	PASS


Project Information			
Mode:	802.11ac40	Band:	U-NII-2A
Bandwidth	40MHz	Channel	62
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

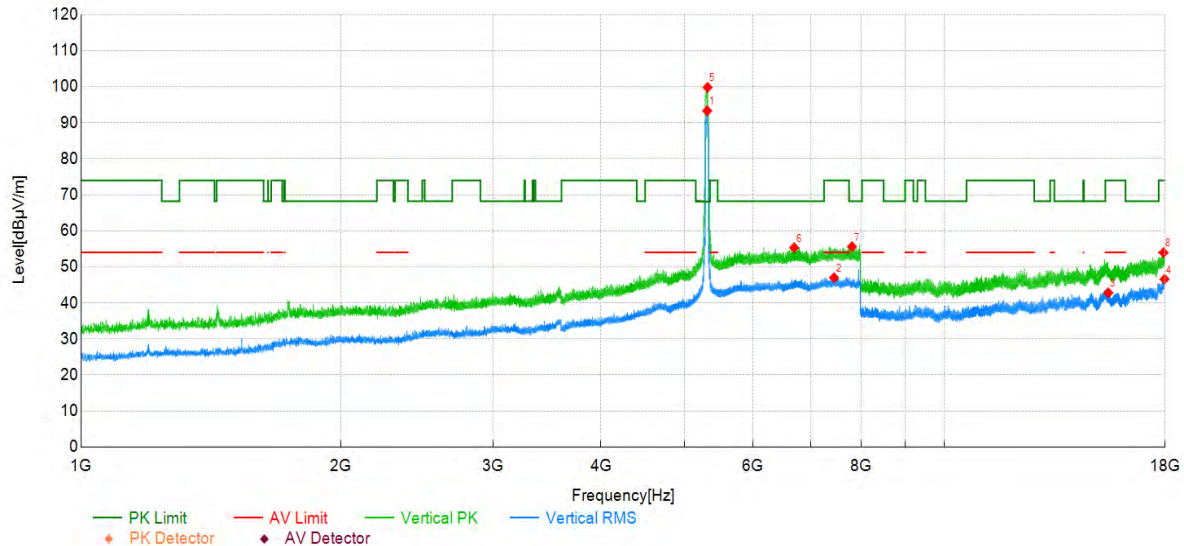

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5308.85	82.86	10.45	93.31	-	-	RMS	Vertical	NA
2	7445.25	30.35	16.62	46.97	54.00	7.03	RMS	Vertical	PASS
3	15474.67	30.91	11.88	42.79	54.00	11.21	RMS	Vertical	PASS
4	17975.33	29.93	16.67	46.60	54.00	7.40	RMS	Vertical	PASS
5	5314.10	89.32	10.49	99.81	-	-	PK	Vertical	NA
6	6696.25	40.45	14.85	55.30	68.20	12.90	PK	Vertical	PASS
7	7811.00	39.06	16.54	55.60	68.20	12.60	PK	Vertical	PASS
8	17930.67	37.62	16.33	53.95	74.00	20.05	PK	Vertical	PASS


Project Information			
Mode:	802.11ax20	Band:	U-NII-2A
Bandwidth	20MHz	Channel	64
SN:	-	Engineer:	Oushuyan
Remark:			

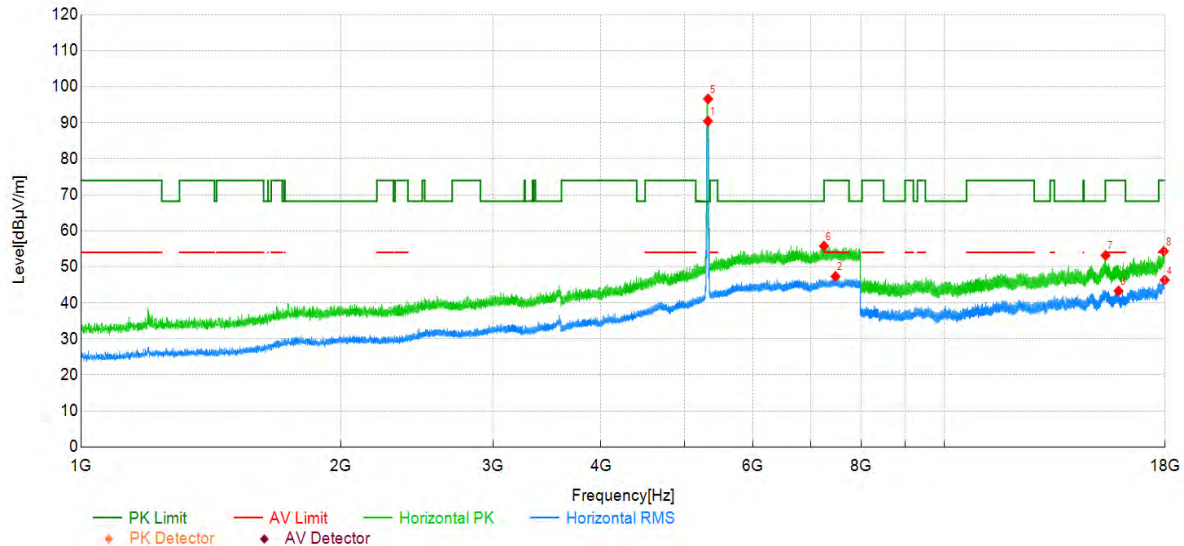Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5319.70	79.88	10.55	90.43	-	-	RMS	Horizontal	NA
2	7475.00	30.67	16.68	47.35	54.00	6.65	RMS	Horizontal	PASS
3	15903.33	31.51	11.79	43.30	54.00	10.70	RMS	Horizontal	PASS
4	17984.33	29.61	16.74	46.35	54.00	7.65	RMS	Horizontal	PASS
5	5321.45	86.03	10.56	96.59	-	-	PK	Horizontal	NA
6	7249.60	39.51	16.26	55.77	68.20	12.43	PK	Horizontal	PASS
7	15360.67	41.27	11.91	53.18	74.00	20.82	PK	Horizontal	PASS
8	17946.67	37.89	16.46	54.35	74.00	19.65	PK	Horizontal	PASS

Project Information			
Mode:	802.11ax20	Band:	U-NII-2A
Bandwidth	20MHz	Channel	64
SN:	-	Engineer:	Oushuyan
Remark:			


Test Graph

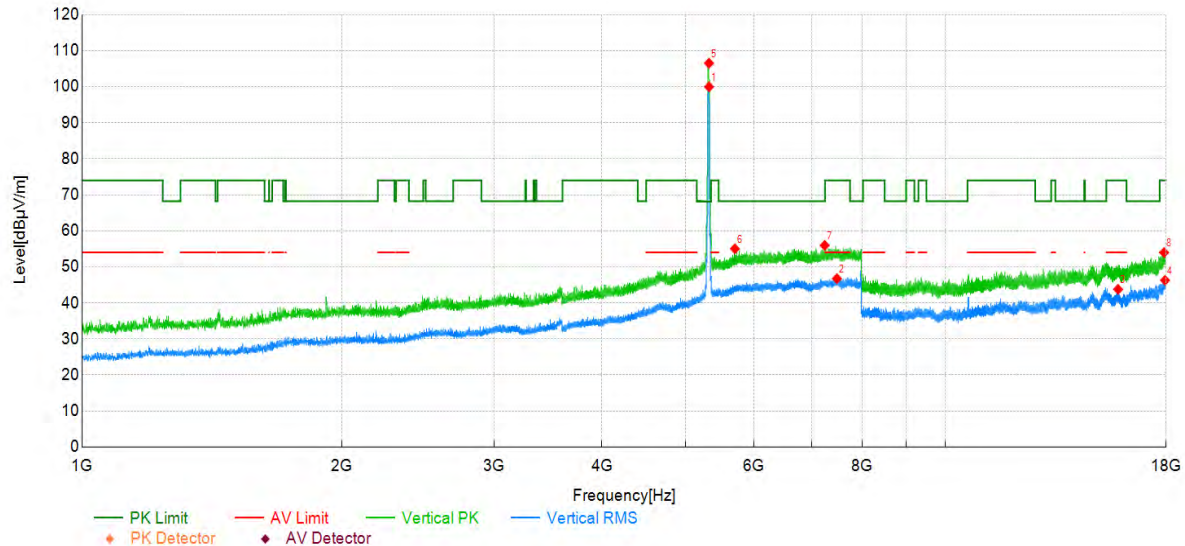

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5321.80	89.41	10.56	99.97	-	-	RMS	Vertical	NA
2	7483.40	30.02	16.70	46.72	54.00	7.28	RMS	Vertical	PASS
3	15838.33	32.26	11.50	43.76	54.00	10.24	RMS	Vertical	PASS
4	17951.33	29.78	16.49	46.27	54.00	7.73	RMS	Vertical	PASS
5	5321.10	95.94	10.56	106.50	-	-	PK	Vertical	NA
6	5700.85	42.23	12.78	55.01	68.20	13.19	PK	Vertical	PASS
7	7244.00	39.72	16.23	55.95	68.20	12.25	PK	Vertical	PASS
8	17908.67	37.81	16.16	53.97	74.00	20.03	PK	Vertical	PASS

Project Information			
Mode:	802.11ax40	Band:	U-NII-2A
Bandwidth	40MHz	Channel	54
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

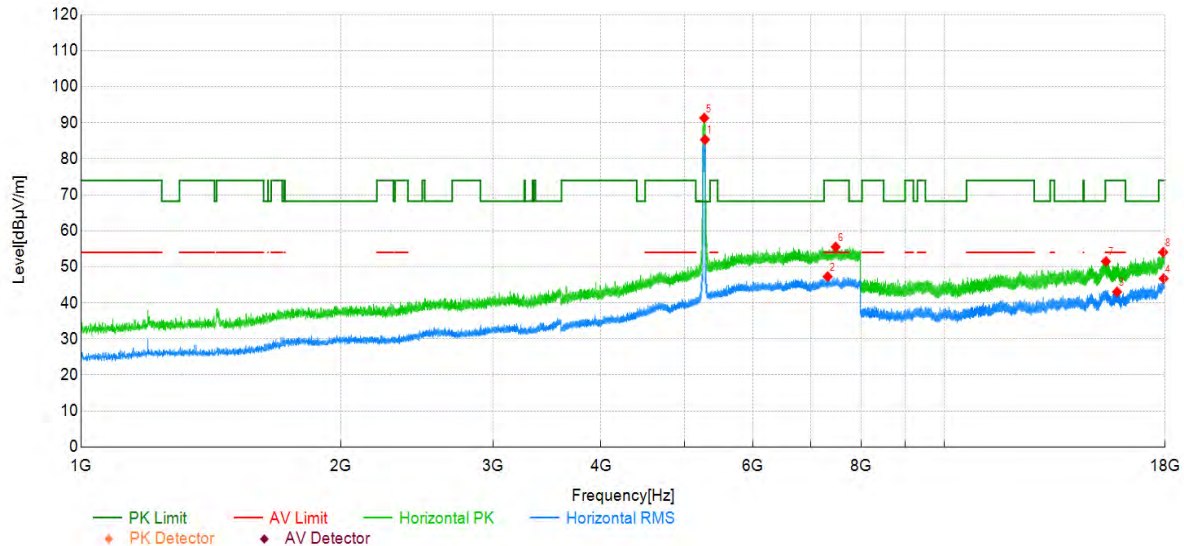

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5278.05	75.05	10.25	85.30	-	-	RMS	Horizontal	NA
2	7320.30	31.08	16.21	47.29	54.00	6.71	RMS	Horizontal	PASS
3	15837.00	31.56	11.49	43.05	54.00	10.95	RMS	Horizontal	PASS
4	17934.00	30.40	16.36	46.76	54.00	7.24	RMS	Horizontal	PASS
5	5267.90	81.11	10.18	91.29	-	-	PK	Horizontal	NA
6	7478.50	38.84	16.69	55.53	74.00	18.47	PK	Horizontal	PASS
7	15374.67	39.59	11.91	51.50	74.00	22.50	PK	Horizontal	PASS
8	17915.00	37.85	16.21	54.06	74.00	19.94	PK	Horizontal	PASS