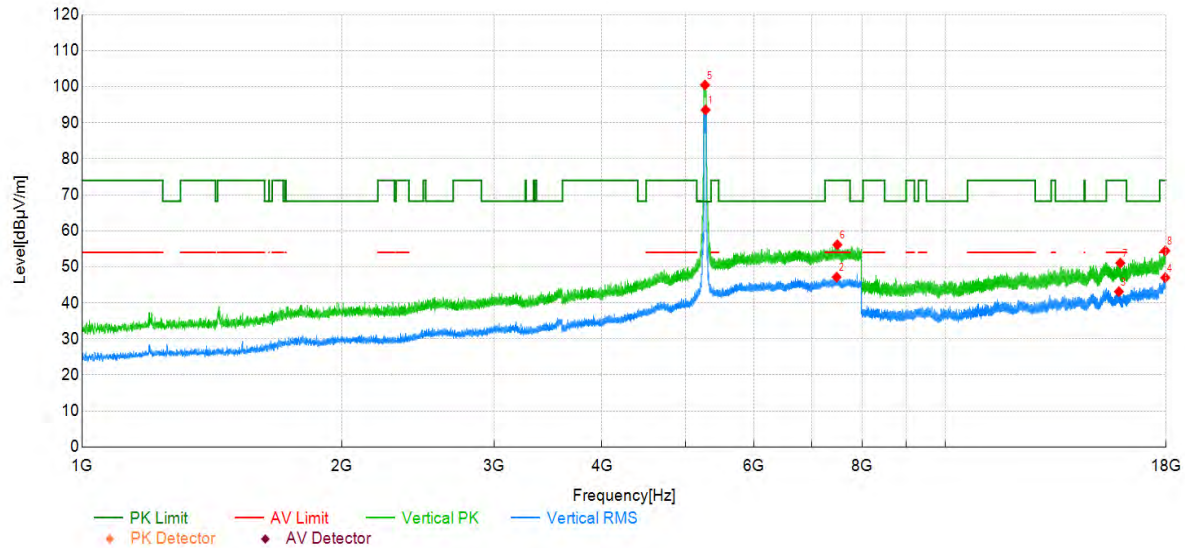


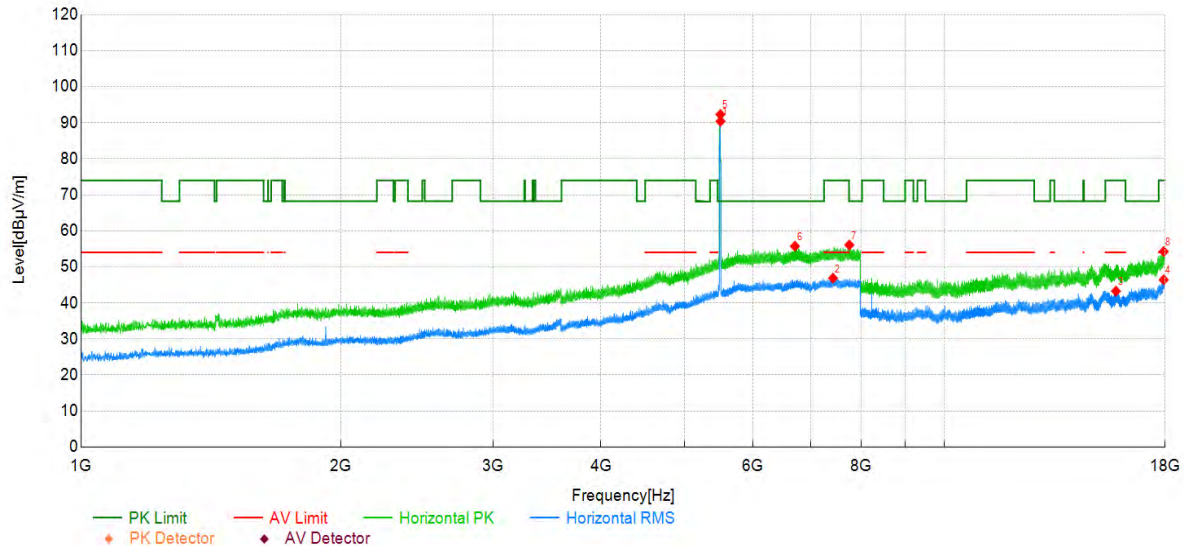
Project Information			
Mode:	802.11ax40	Band:	U-NII-2A
Bandwidth	40MHz	Channel	54
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph



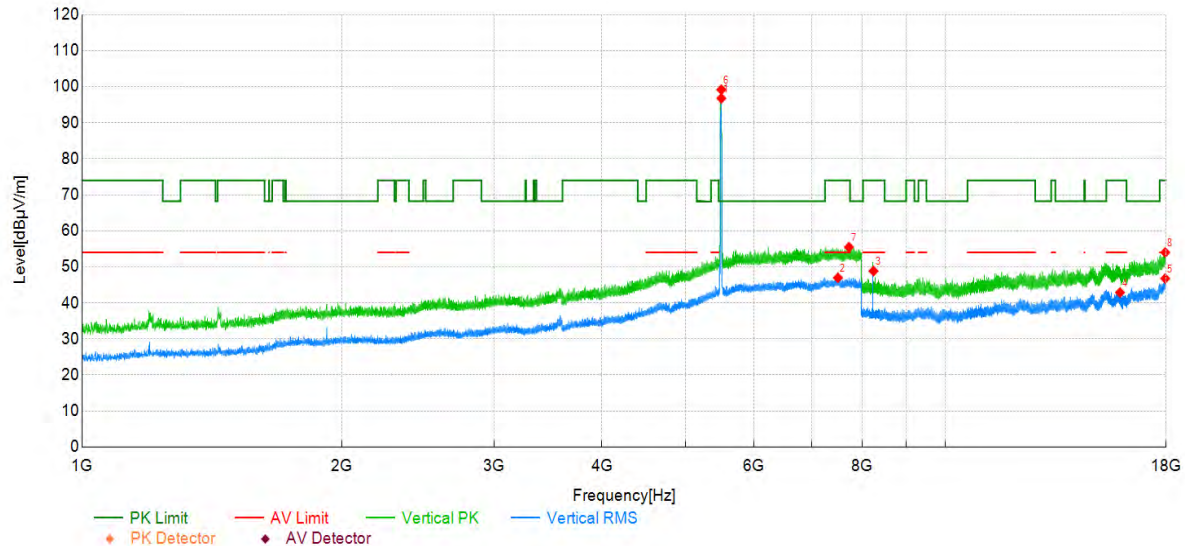
Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5271.75	83.34	10.20	93.54	-	-	RMS	Vertical	NA
2	7477.80	30.45	16.69	47.14	54.00	6.86	RMS	Vertical	PASS
3	15875.33	31.42	11.70	43.12	54.00	10.88	RMS	Vertical	PASS
4	17963.67	30.41	16.58	46.99	54.00	7.01	RMS	Vertical	PASS
5	5264.40	90.29	10.16	100.45	-	-	PK	Vertical	NA
6	7492.85	39.42	16.70	56.12	74.00	17.88	PK	Vertical	PASS
7	15936.00	39.63	11.42	51.05	74.00	22.95	PK	Vertical	PASS
8	17967.33	37.86	16.61	54.47	74.00	19.53	PK	Vertical	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-2C
Bandwidth	20MHz	Channel	100
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5501.35	78.73	11.66	90.39	-	-	RMS	Horizontal	NA
2	7424.95	30.42	16.43	46.85	54.00	7.15	RMS	Horizontal	PASS
3	15790.67	31.97	11.29	43.26	54.00	10.74	RMS	Horizontal	PASS
4	17932.33	30.07	16.35	46.42	54.00	7.58	RMS	Horizontal	PASS
5	5499.60	80.62	11.65	92.27	-	-	PK	Horizontal	NA
6	6708.50	40.85	14.88	55.73	68.20	12.47	PK	Horizontal	PASS
7	7756.05	39.50	16.56	56.06	68.20	12.14	PK	Horizontal	PASS
8	17936.67	37.88	16.38	54.26	74.00	19.74	PK	Horizontal	PASS

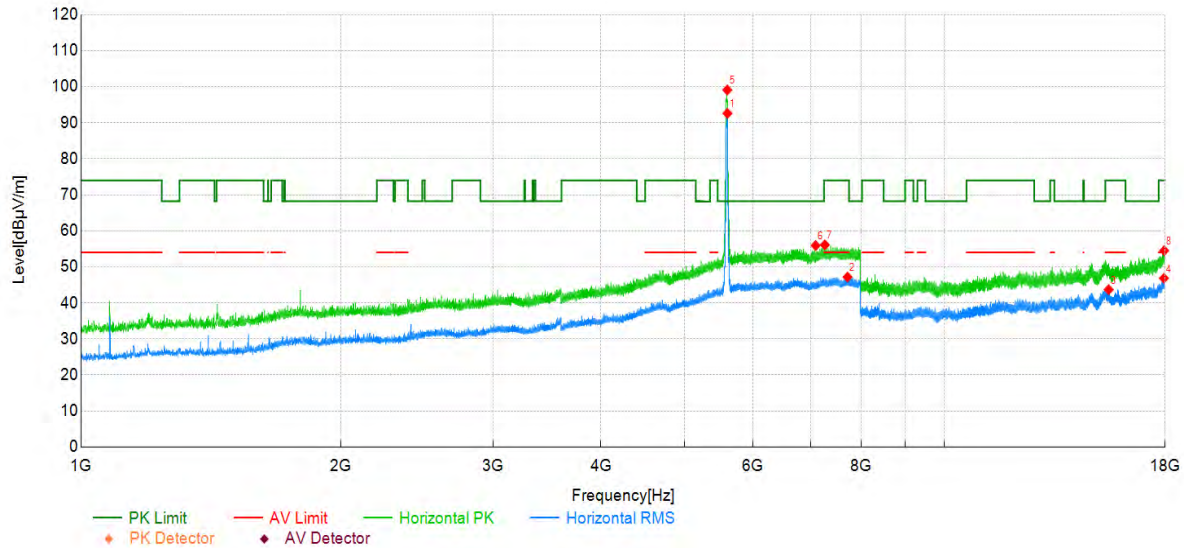
Project Information			
Mode:	802.11a	Band:	U-NII-2C
Bandwidth	20MHz	Channel	100
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5498.90	85.12	11.65	96.77	-	-	RMS	Vertical	NA
2	7503.35	30.28	16.69	46.97	54.00	7.03	RMS	Vertical	PASS
3	8250.33	47.51	1.32	48.83	54.00	5.17	RMS	Vertical	PASS
4	15922.00	31.30	11.58	42.88	54.00	11.12	RMS	Vertical	PASS
5	17961.00	30.19	16.56	46.75	54.00	7.25	RMS	Vertical	PASS
6	5499.60	87.52	11.65	99.17	-	-	PK	Vertical	NA
7	7728.40	38.96	16.49	55.45	74.00	18.55	PK	Vertical	PASS
8	17963.67	37.42	16.58	54.00	74.00	20.00	PK	Vertical	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-2C
Bandwidth	20MHz	Channel	120
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

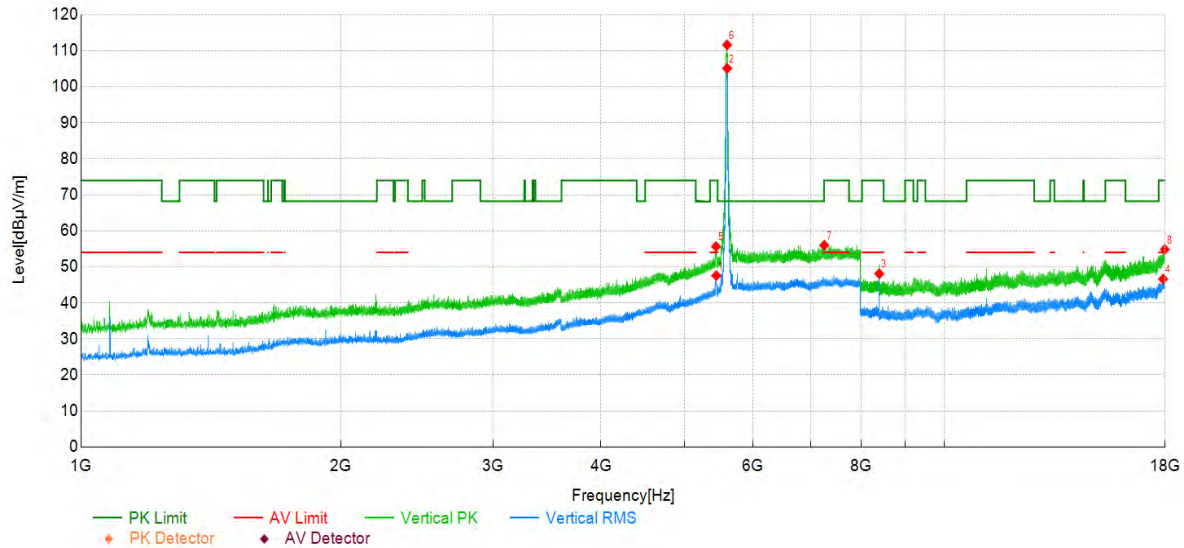


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5603.55	80.62	11.97	92.59	-	-	RMS	Horizontal	NA
2	7718.60	30.72	16.45	47.17	54.00	6.83	RMS	Horizontal	PASS
3	15487.67	31.80	11.88	43.68	54.00	10.32	RMS	Horizontal	PASS
4	17945.00	30.40	16.44	46.84	54.00	7.16	RMS	Horizontal	PASS
5	5601.80	87.14	11.95	99.09	-	-	PK	Horizontal	NA
6	7090.00	40.58	15.32	55.90	68.20	12.30	PK	Horizontal	PASS
7	7265.70	39.88	16.22	56.10	74.00	17.90	PK	Horizontal	PASS
8	17960.00	37.94	16.56	54.50	74.00	19.50	PK	Horizontal	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-2C
Bandwidth	20MHz	Channel	120
SN:	-	Engineer:	Oushuyan
Remark:			

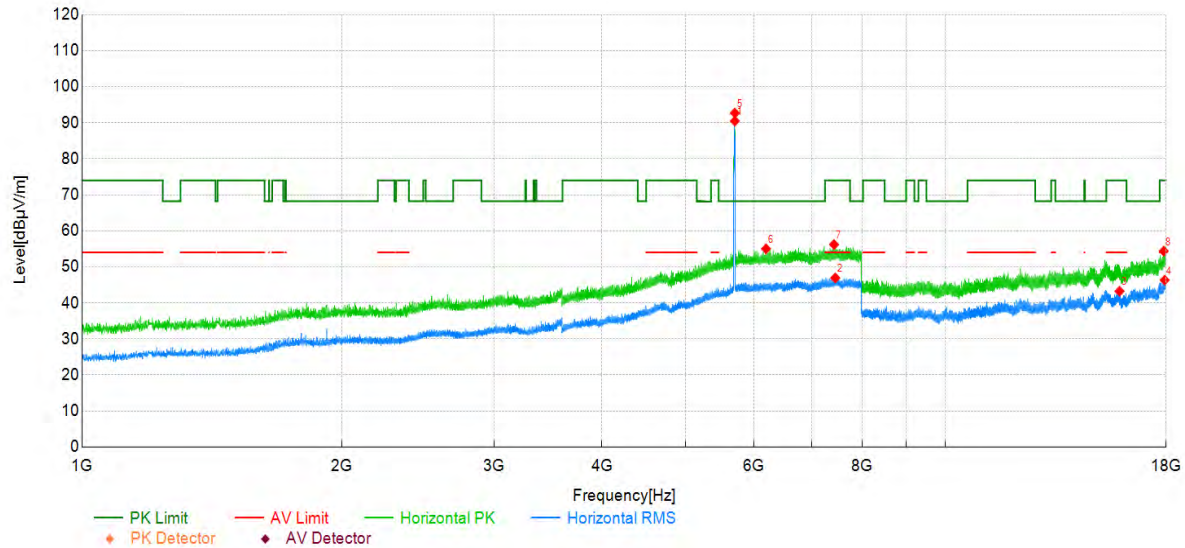
Test Graph



Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5438.35	36.14	11.44	47.58	54.00	6.42	RMS	Vertical	PASS
2	5599.35	93.13	11.94	105.07	-	-	RMS	Vertical	NA
3	8400.33	46.66	1.42	48.08	54.00	5.92	RMS	Vertical	PASS
4	17907.00	30.46	16.16	46.62	54.00	7.38	RMS	Vertical	PASS
5	5436.25	44.23	11.42	55.65	74.00	18.35	PK	Vertical	PASS
6	5599.35	99.65	11.94	111.59	-	-	PK	Vertical	NA
7	7253.80	39.74	16.24	55.98	74.00	18.02	PK	Vertical	PASS
8	17989.33	38.05	16.78	54.83	74.00	19.17	PK	Vertical	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-2C
Bandwidth	20MHz	Channel	140
SN:	-	Engineer:	Oushuyan
Remark:			

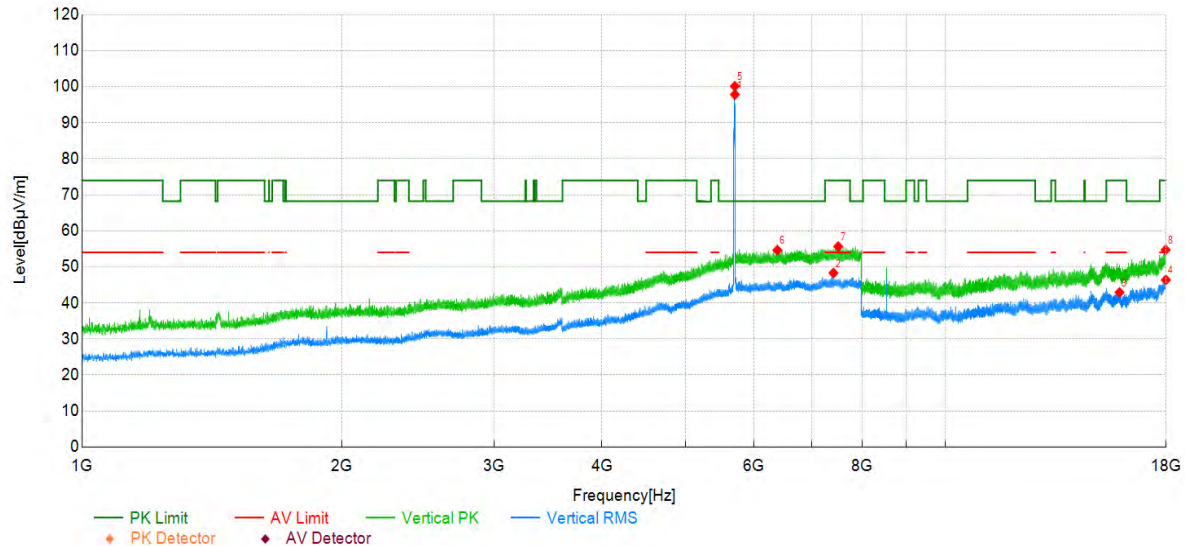
Test Graph



Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5700.85	77.68	12.78	90.46	-	-	RMS	Horizontal	NA
2	7450.85	30.24	16.66	46.90	54.00	7.10	RMS	Horizontal	PASS
3	15899.67	31.40	11.83	43.23	54.00	10.77	RMS	Horizontal	PASS
4	17934.00	29.96	16.36	46.32	54.00	7.68	RMS	Horizontal	PASS
5	5700.85	79.90	12.78	92.68	-	-	PK	Horizontal	NA
6	6193.65	41.73	13.26	54.99	68.20	13.21	PK	Horizontal	PASS
7	7426.35	39.74	16.45	56.19	74.00	17.81	PK	Horizontal	PASS
8	17891.33	38.31	16.06	54.37	74.00	19.63	PK	Horizontal	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-2C
Bandwidth	20MHz	Channel	140
SN:	-	Engineer:	Oushuyan
Remark:			

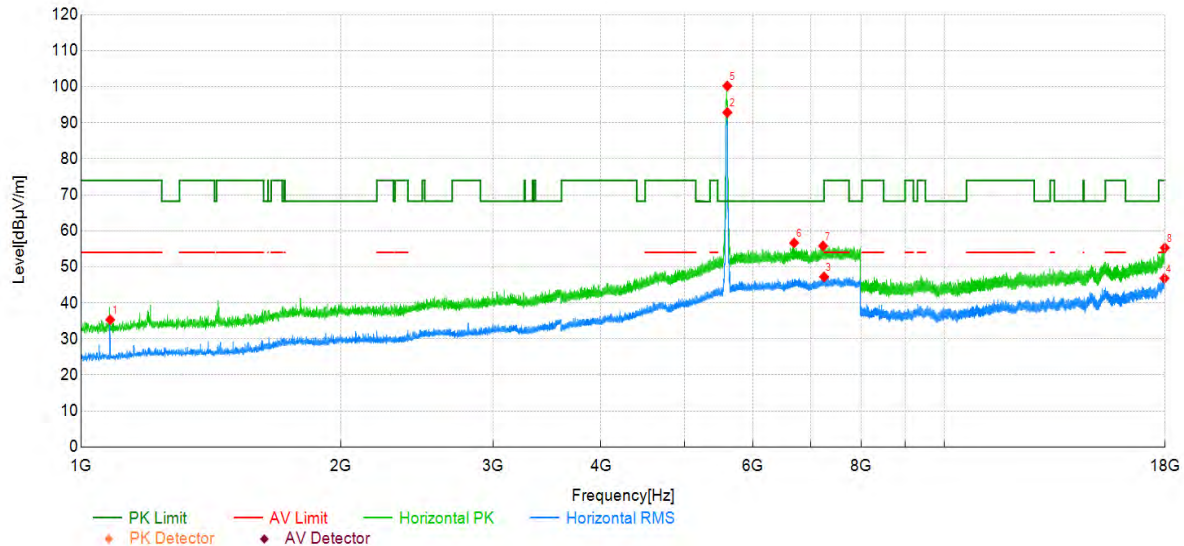
Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5701.20	85.02	12.78	97.80	-	-	RMS	Vertical	NA
2	7415.50	31.95	16.35	48.30	54.00	5.70	RMS	Vertical	PASS
3	15899.67	31.08	11.83	42.91	54.00	11.09	RMS	Vertical	PASS
4	17993.00	29.59	16.80	46.39	54.00	7.61	RMS	Vertical	PASS
5	5700.50	87.34	12.77	100.11	-	-	PK	Vertical	NA
6	6384.75	40.80	13.84	54.64	68.20	13.56	PK	Vertical	PASS
7	7509.65	38.99	16.64	55.63	74.00	18.37	PK	Vertical	PASS
8	17979.33	38.01	16.71	54.72	74.00	19.28	PK	Vertical	PASS

Project Information

Mode:	802.11ac20	Band:	U-NII-2C
Bandwidth	20MHz	Channel	120
SN:	-	Engineer:	Oushuyan
Remark:			

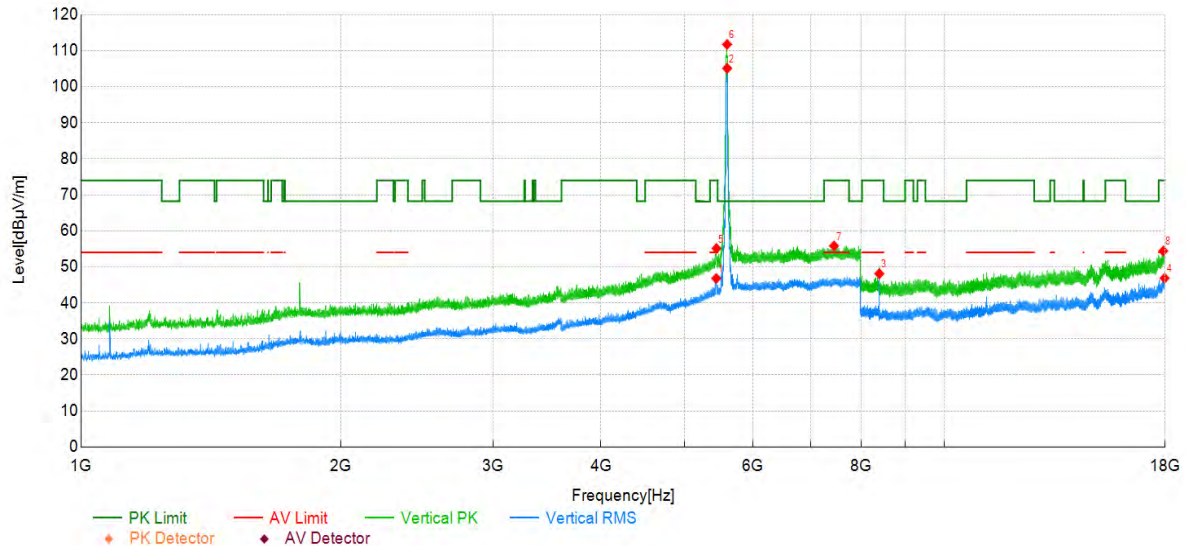
Test Graph



Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	1080.50	42.18	-6.85	35.33	54.00	18.67	RMS	Horizontal	PASS
2	5601.80	80.88	11.95	92.83	-	-	RMS	Horizontal	NA
3	7252.05	30.96	16.25	47.21	54.00	6.79	RMS	Horizontal	PASS
4	17973.33	30.17	16.65	46.82	54.00	7.18	RMS	Horizontal	PASS
5	5601.45	88.25	11.95	100.20	-	-	PK	Horizontal	NA
6	6693.80	41.80	14.84	56.64	68.20	11.56	PK	Horizontal	PASS
7	7232.10	39.63	16.17	55.80	68.20	12.40	PK	Horizontal	PASS
8	17992.33	38.48	16.80	55.28	74.00	18.72	PK	Horizontal	PASS

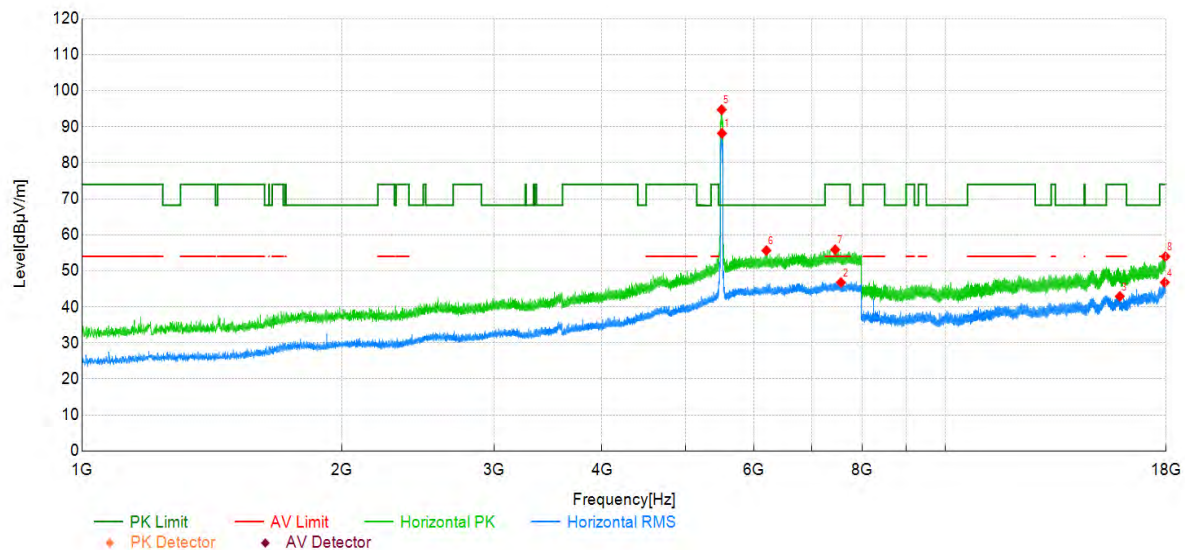
Project Information			
Mode:	802.11ac20	Band:	U-NII-2C
Bandwidth	20MHz	Channel	120
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5439.05	35.34	11.44	46.78	54.00	7.22	RMS	Vertical	PASS
2	5599.00	93.15	11.94	105.09	-	-	RMS	Vertical	NA
3	8400.33	46.67	1.42	48.09	54.00	5.91	RMS	Vertical	PASS
4	17981.67	30.14	16.72	46.86	54.00	7.14	RMS	Vertical	PASS
5	5441.50	43.64	11.47	55.11	74.00	18.89	PK	Vertical	PASS
6	5599.35	99.79	11.94	111.73	-	-	PK	Vertical	NA
7	7445.60	39.19	16.62	55.81	74.00	18.19	PK	Vertical	PASS
8	17916.33	38.19	16.23	54.42	74.00	19.58	PK	Vertical	PASS

Project Information			
Mode:	802.11ac40	Band:	U-NII-2C
Bandwidth	40MHz	Channel	102
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

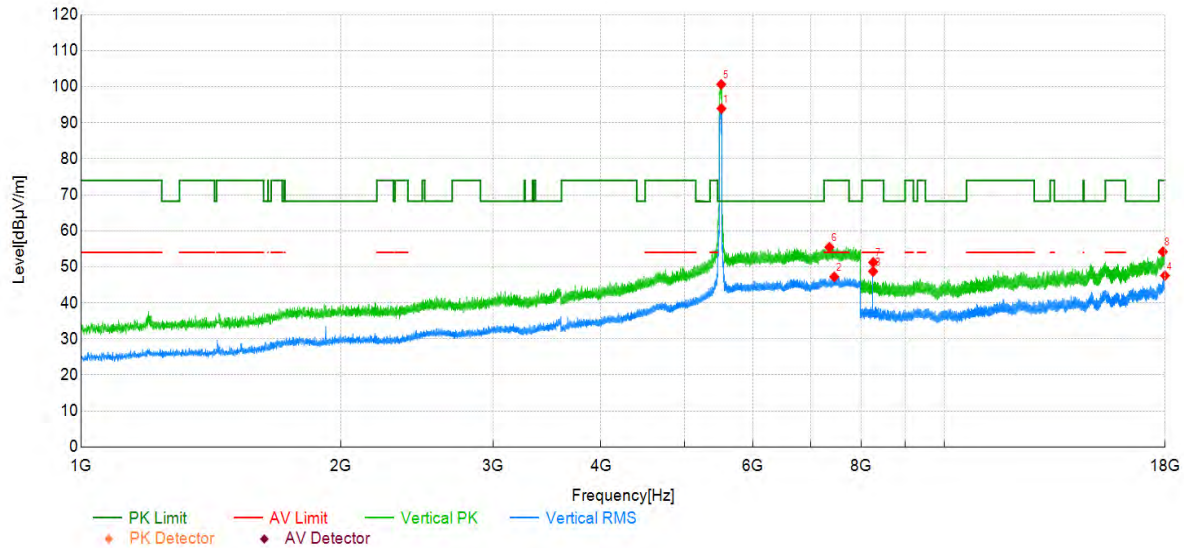


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5508.00	76.49	11.68	88.17	-	-	RMS	Horizontal	NA
2	7563.55	30.53	16.24	46.77	54.00	7.23	RMS	Horizontal	PASS
3	15914.67	31.24	11.67	42.91	54.00	11.09	RMS	Horizontal	PASS
4	17939.67	30.40	16.40	46.80	54.00	7.20	RMS	Horizontal	PASS
5	5503.45	83.05	11.66	94.71	-	-	PK	Horizontal	NA
6	6201.00	42.36	13.28	55.64	68.20	12.56	PK	Horizontal	PASS
7	7449.10	39.21	16.66	55.87	74.00	18.13	PK	Horizontal	PASS
8	17972.67	37.31	16.65	53.96	74.00	20.04	PK	Horizontal	PASS

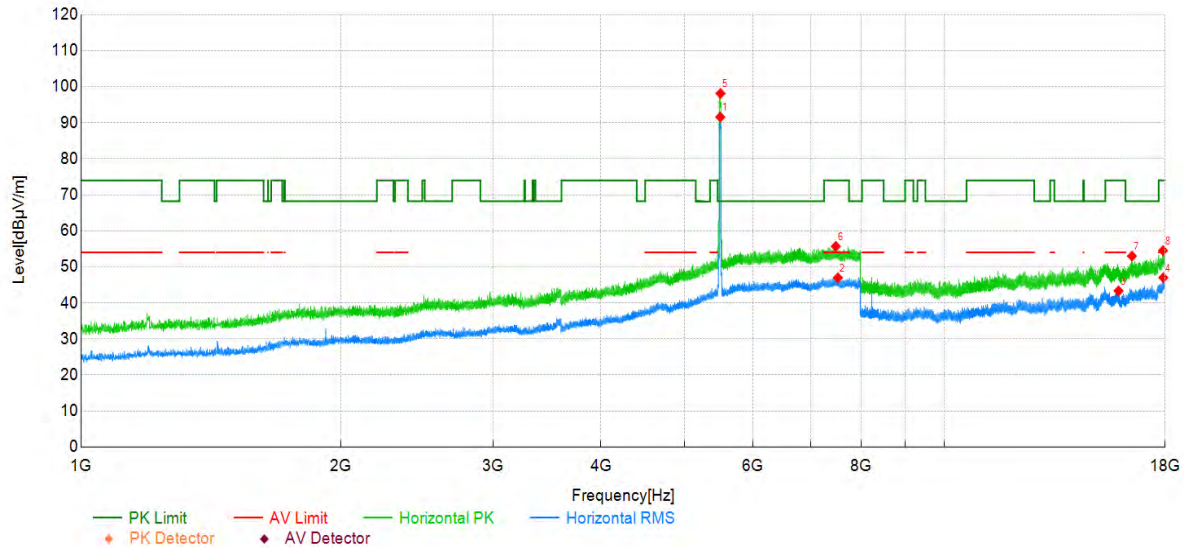
Project Information			
Mode:	802.11ac40	Band:	U-NII-2C
Bandwidth	40MHz	Channel	102
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph



Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5515.00	82.22	11.71	93.93	-	-	RMS	Vertical	NA
2	7450.50	30.57	16.66	47.23	54.00	6.77	RMS	Vertical	PASS
3	8265.33	47.29	1.43	48.72	54.00	5.28	RMS	Vertical	PASS
4	17999.33	30.71	16.86	47.57	54.00	6.43	RMS	Vertical	PASS
5	5511.50	88.93	11.70	100.63	-	-	PK	Vertical	NA
6	7354.60	39.09	16.35	55.44	74.00	18.56	PK	Vertical	PASS
7	8265.00	49.82	1.42	51.24	74.00	22.76	PK	Vertical	PASS
8	17895.33	38.12	16.07	54.19	74.00	19.81	PK	Vertical	PASS

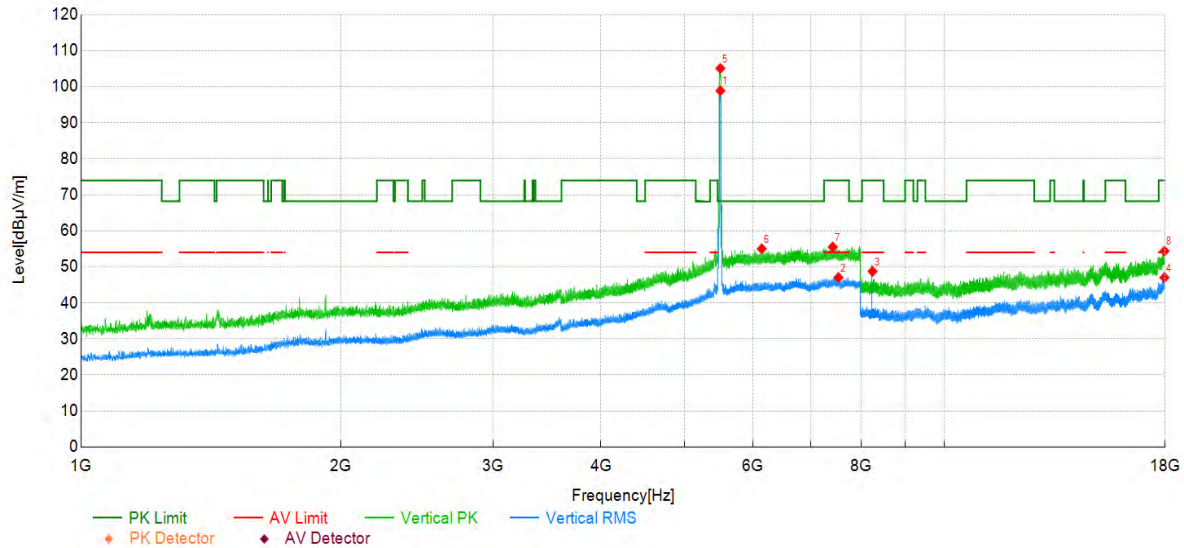
Project Information			
Mode:	802.11ax20	Band:	U-NII-2C
Bandwidth	20MHz	Channel	100
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5497.85	79.92	11.65	91.57	-	-	RMS	Horizontal	NA
2	7522.95	30.41	16.55	46.96	54.00	7.04	RMS	Horizontal	PASS
3	15901.67	31.51	11.81	43.32	54.00	10.68	RMS	Horizontal	PASS
4	17920.00	30.75	16.25	47.00	54.00	7.00	RMS	Horizontal	PASS
5	5501.35	86.47	11.66	98.13	-	-	PK	Horizontal	NA
6	7481.65	38.99	16.69	55.68	74.00	18.32	PK	Horizontal	PASS
7	16478.67	40.30	12.70	53.00	68.20	15.20	PK	Horizontal	PASS
8	17907.00	38.36	16.16	54.52	74.00	19.48	PK	Horizontal	PASS

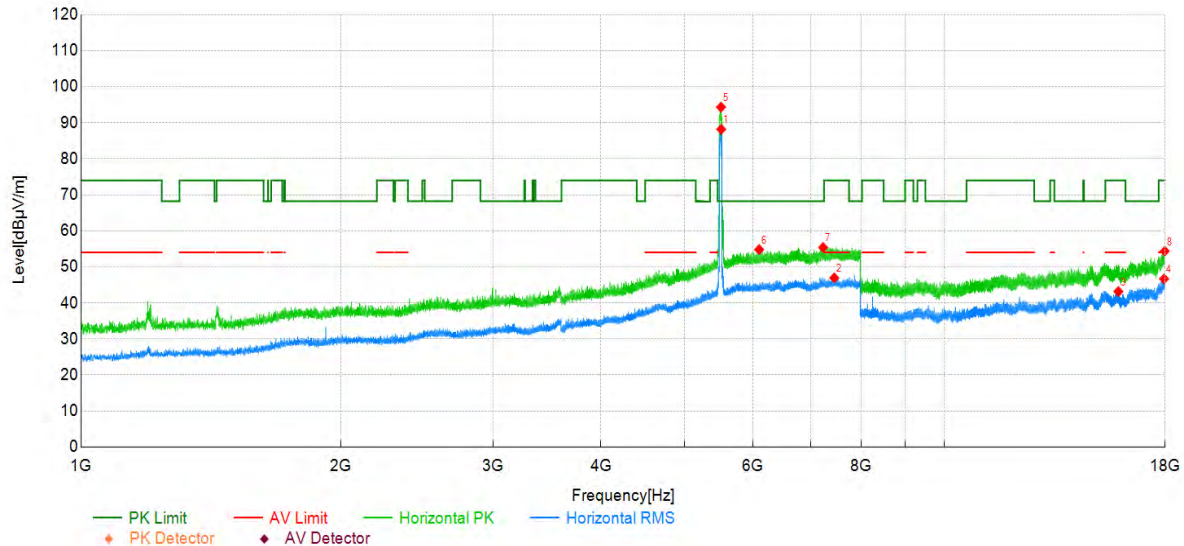
Project Information			
Mode:	802.11ax20	Band:	U-NII-2C
Bandwidth	20MHz	Channel	100
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph



Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5499.25	87.23	11.65	98.88	-	-	RMS	Vertical	NA
2	7533.80	30.57	16.48	47.05	54.00	6.95	RMS	Vertical	PASS
3	8250.33	47.42	1.32	48.74	54.00	5.26	RMS	Vertical	PASS
4	17968.00	30.42	16.61	47.03	54.00	6.97	RMS	Vertical	PASS
5	5498.90	93.42	11.65	105.07	-	-	PK	Vertical	NA
6	6140.45	41.88	13.12	55.00	68.20	13.20	PK	Vertical	PASS
7	7420.05	39.12	16.39	55.51	74.00	18.49	PK	Vertical	PASS
8	17974.00	37.73	16.67	54.40	74.00	19.60	PK	Vertical	PASS

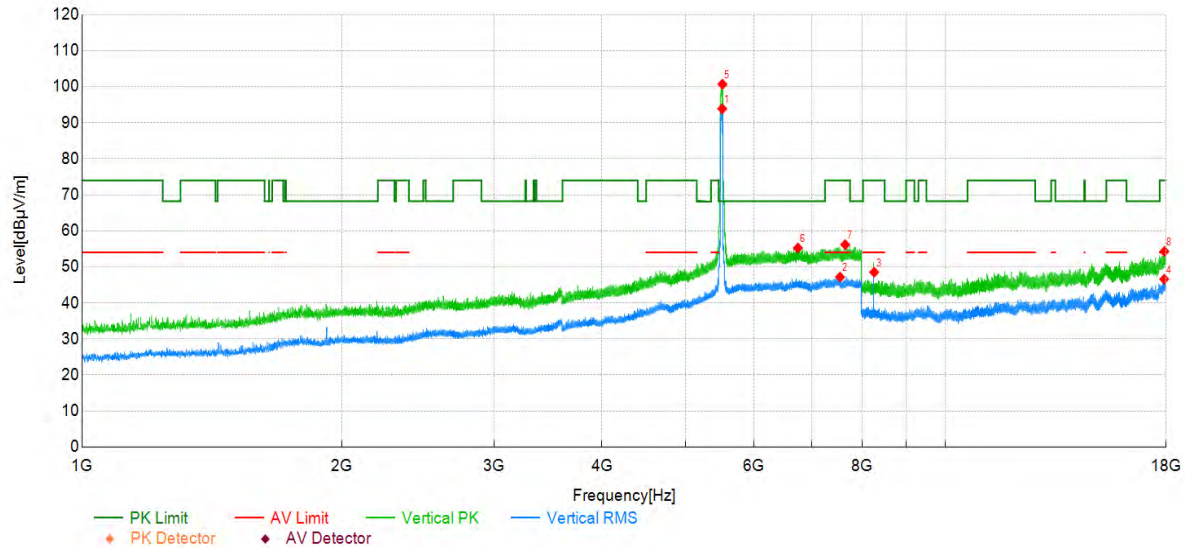
Project Information			
Mode:	802.11ax40	Band:	U-NII-2C
Bandwidth	40MHz	Channel	102
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5512.20	76.48	11.70	88.18	-	-	RMS	Horizontal	NA
2	7452.25	30.28	16.66	46.94	54.00	7.06	RMS	Horizontal	PASS
3	15895.33	31.35	11.80	43.15	54.00	10.85	RMS	Horizontal	PASS
4	17953.00	30.16	16.50	46.66	54.00	7.34	RMS	Horizontal	PASS
5	5508.35	82.63	11.68	94.31	-	-	PK	Horizontal	NA
6	6097.75	41.92	12.88	54.80	68.20	13.40	PK	Horizontal	PASS
7	7232.80	39.20	16.17	55.37	68.20	12.83	PK	Horizontal	PASS
8	17986.33	37.62	16.76	54.38	74.00	19.62	PK	Horizontal	PASS

Project Information			
Mode:	802.11ax40	Band:	U-NII-2C
Bandwidth	40MHz	Channel	102
SN:	-	Engineer:	Oushuyan
Remark:			

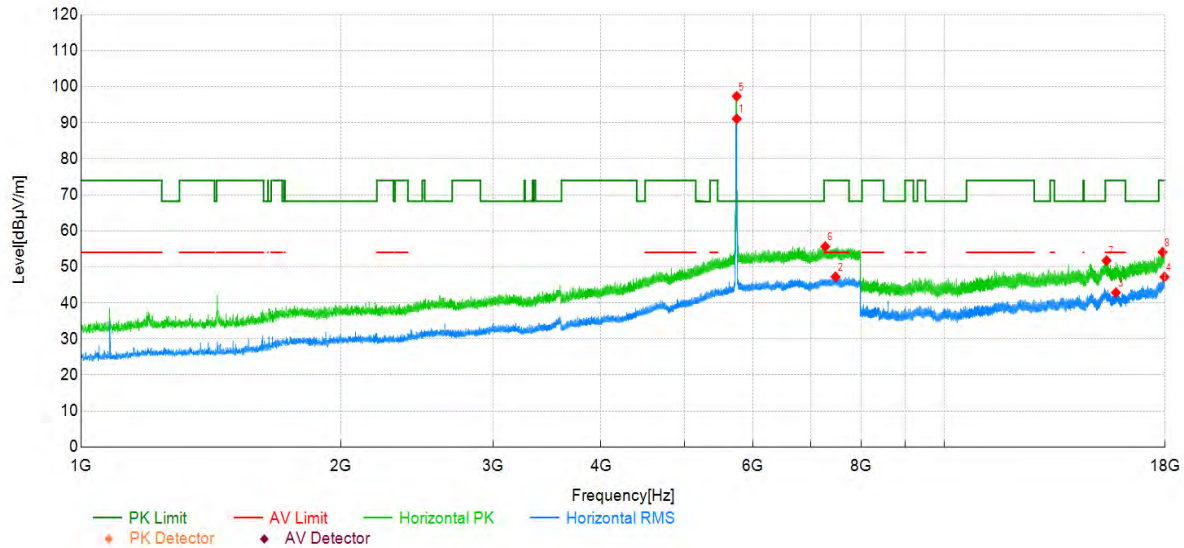
Test Graph



Data List

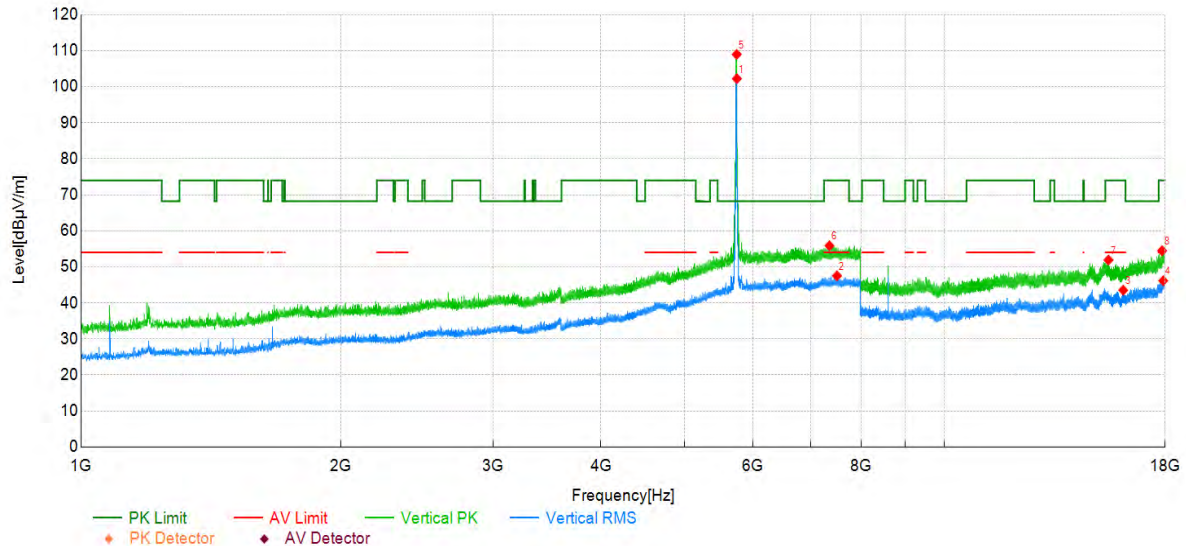
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5512.20	82.18	11.70	93.88	-	-	RMS	Vertical	NA
2	7546.05	30.78	16.39	47.17	54.00	6.83	RMS	Vertical	PASS
3	8265.33	47.08	1.43	48.51	54.00	5.49	RMS	Vertical	PASS
4	17913.33	30.38	16.20	46.58	54.00	7.42	RMS	Vertical	PASS
5	5515.35	88.97	11.71	100.68	-	-	PK	Vertical	NA
6	6744.90	40.26	14.98	55.24	68.20	12.96	PK	Vertical	PASS
7	7651.40	40.05	16.11	56.16	74.00	17.84	PK	Vertical	PASS
8	17919.00	38.04	16.25	54.29	74.00	19.71	PK	Vertical	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-3
Bandwidth	20MHz	Channel	149
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5744.60	77.88	13.19	91.07	-	-	RMS	Horizontal	NA
2	7476.75	30.55	16.68	47.23	54.00	6.77	RMS	Horizontal	PASS
3	15788.33	31.58	11.29	42.87	54.00	11.13	RMS	Horizontal	PASS
4	17973.00	30.53	16.65	47.18	54.00	6.82	RMS	Horizontal	PASS
5	5744.25	84.16	13.19	97.35	-	-	PK	Horizontal	NA
6	7274.45	39.48	16.18	55.66	74.00	18.34	PK	Horizontal	PASS
7	15400.33	39.84	11.89	51.73	74.00	22.27	PK	Horizontal	PASS
8	17881.00	38.09	16.00	54.09	74.00	19.91	PK	Horizontal	PASS

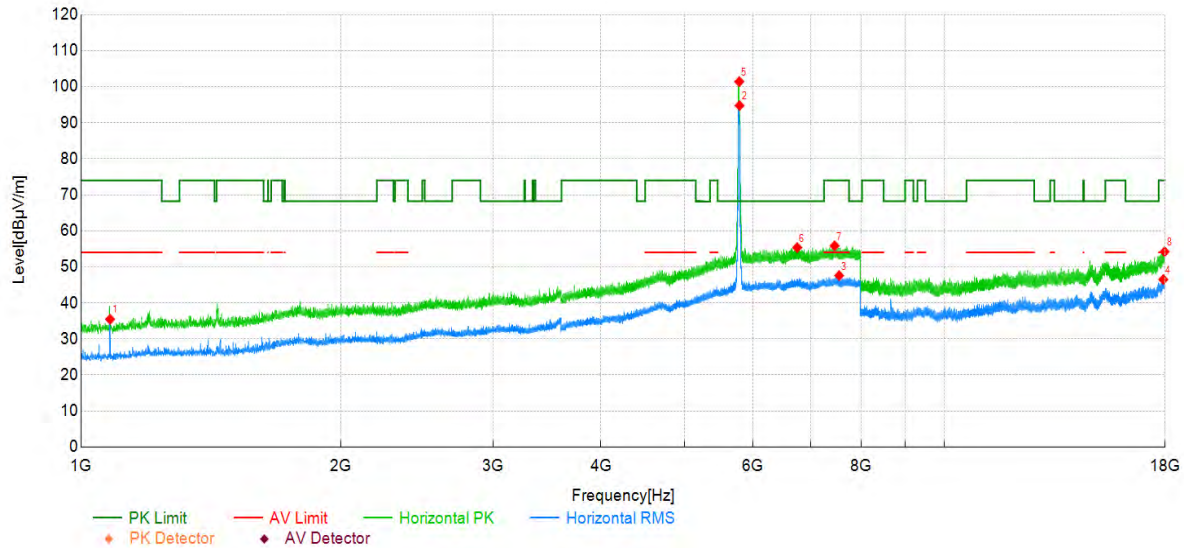
Project Information			
Mode:	802.11a	Band:	U-NII-3
Bandwidth	20MHz	Channel	149
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5746.00	89.01	13.20	102.21	-	-	RMS	Vertical	NA
2	7504.40	30.82	16.68	47.50	54.00	6.50	RMS	Vertical	PASS
3	16099.67	31.82	11.72	43.54	54.00	10.46	RMS	Vertical	PASS
4	17913.00	29.95	16.20	46.15	54.00	7.85	RMS	Vertical	PASS
5	5743.90	95.78	13.19	108.97	-	-	PK	Vertical	NA
6	7356.35	39.51	16.34	55.85	74.00	18.15	PK	Vertical	PASS
7	15479.33	40.01	11.88	51.89	74.00	22.11	PK	Vertical	PASS
8	17860.00	38.59	15.89	54.48	74.00	19.52	PK	Vertical	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-3
Bandwidth	20MHz	Channel	157
SN:	-	Engineer:	Oushuyan
Remark:			

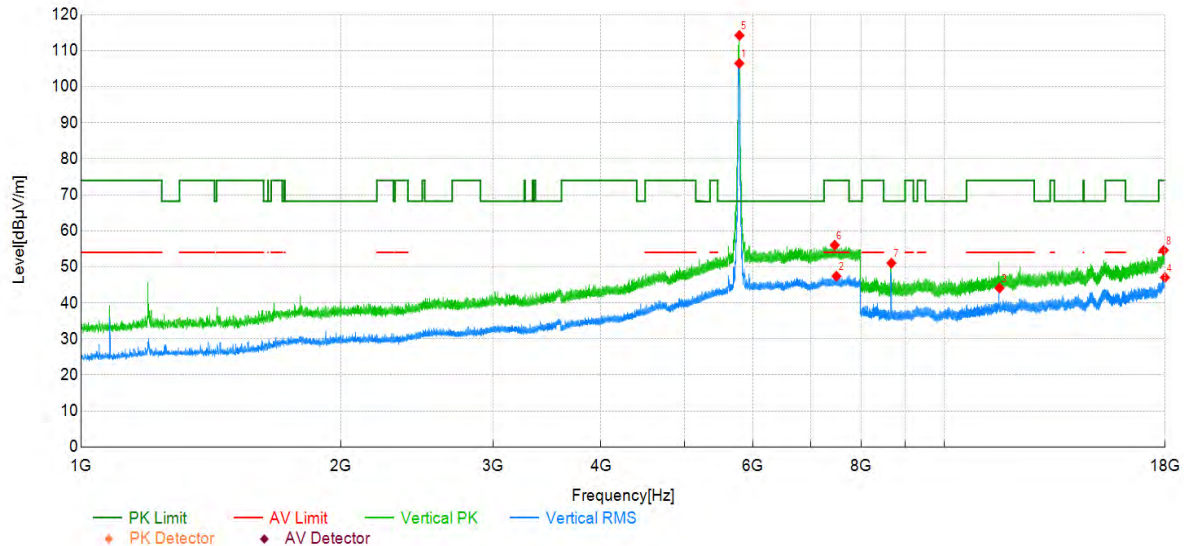
Test Graph



Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	1080.15	42.32	-6.85	35.47	54.00	18.53	RMS	Horizontal	PASS
2	5787.30	81.17	13.59	94.76	-	-	RMS	Horizontal	NA
3	7549.55	31.21	16.37	47.58	54.00	6.42	RMS	Horizontal	PASS
4	17917.00	30.27	16.23	46.50	54.00	7.50	RMS	Horizontal	PASS
5	5783.45	87.83	13.57	101.40	-	-	PK	Horizontal	NA
6	6749.80	40.36	14.99	55.35	68.20	12.85	PK	Horizontal	PASS
7	7456.45	39.17	16.66	55.83	74.00	18.17	PK	Horizontal	PASS
8	17982.33	37.47	16.73	54.20	74.00	19.80	PK	Horizontal	PASS

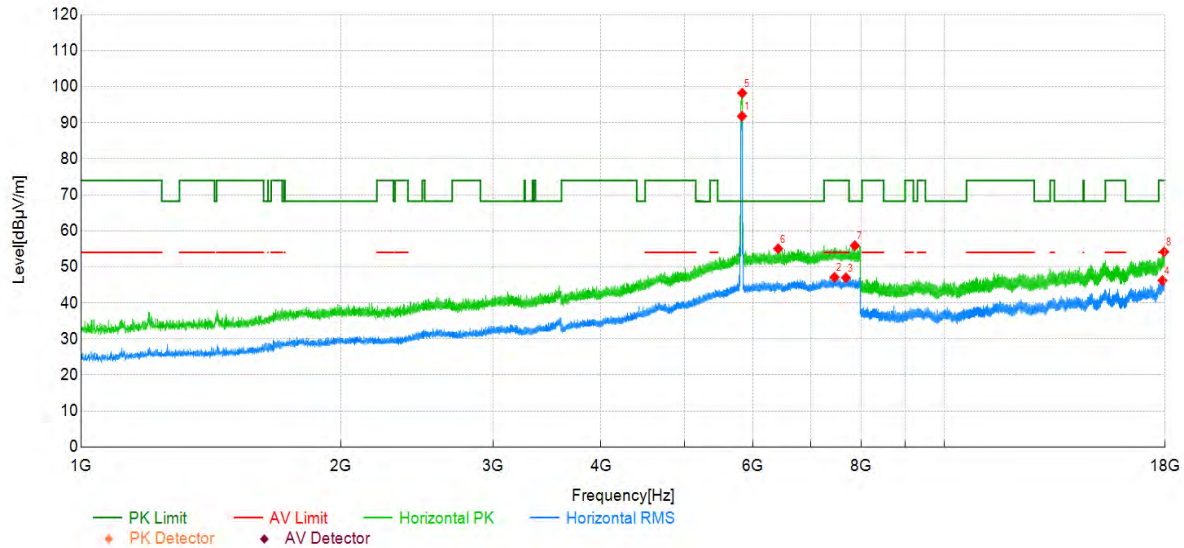
Project Information			
Mode:	802.11a	Band:	U-NII-3
Bandwidth	20MHz	Channel	157
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5784.15	92.90	13.57	106.47	-	-	RMS	Vertical	NA
2	7493.90	30.71	16.70	47.41	54.00	6.59	RMS	Vertical	PASS
3	11577.67	37.57	6.56	44.13	54.00	9.87	RMS	Vertical	PASS
4	17995.00	30.22	16.82	47.04	54.00	6.96	RMS	Vertical	PASS
5	5786.25	100.64	13.59	114.23	-	-	PK	Vertical	NA
6	7459.25	39.34	16.67	56.01	74.00	17.99	PK	Vertical	PASS
7	8677.33	49.63	1.41	51.04	68.20	17.16	PK	Vertical	PASS
8	17939.67	38.20	16.40	54.60	74.00	19.40	PK	Vertical	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-3
Bandwidth	20MHz	Channel	165
SN:	-	Engineer:	Oushuyan
Remark:			

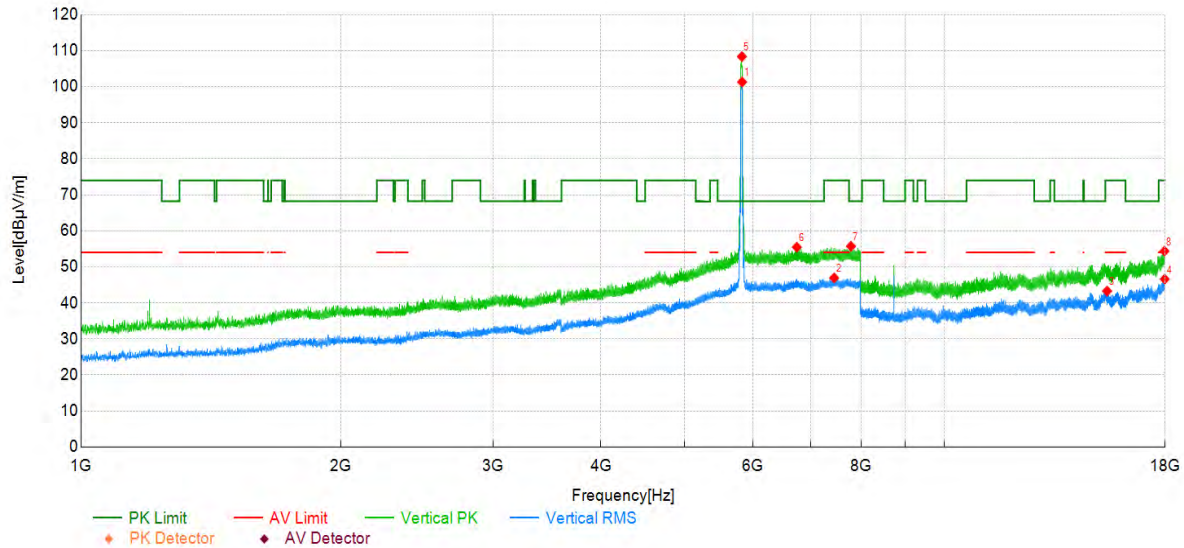
Test Graph



Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5826.15	78.20	13.60	91.80	-	-	RMS	Horizontal	NA
2	7455.05	30.45	16.67	47.12	54.00	6.88	RMS	Horizontal	PASS
3	7686.75	30.66	16.31	46.97	54.00	7.03	RMS	Horizontal	PASS
4	17875.67	30.22	15.97	46.19	54.00	7.81	RMS	Horizontal	PASS
5	5829.30	84.62	13.59	98.21	-	-	PK	Horizontal	NA
6	6415.20	41.02	14.02	55.04	68.20	13.16	PK	Horizontal	PASS
7	7870.85	39.36	16.51	55.87	68.20	12.33	PK	Horizontal	PASS
8	17956.67	37.63	16.53	54.16	74.00	19.84	PK	Horizontal	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-3
Bandwidth	20MHz	Channel	165
SN:	-	Engineer:	Oushuyan
Remark:			

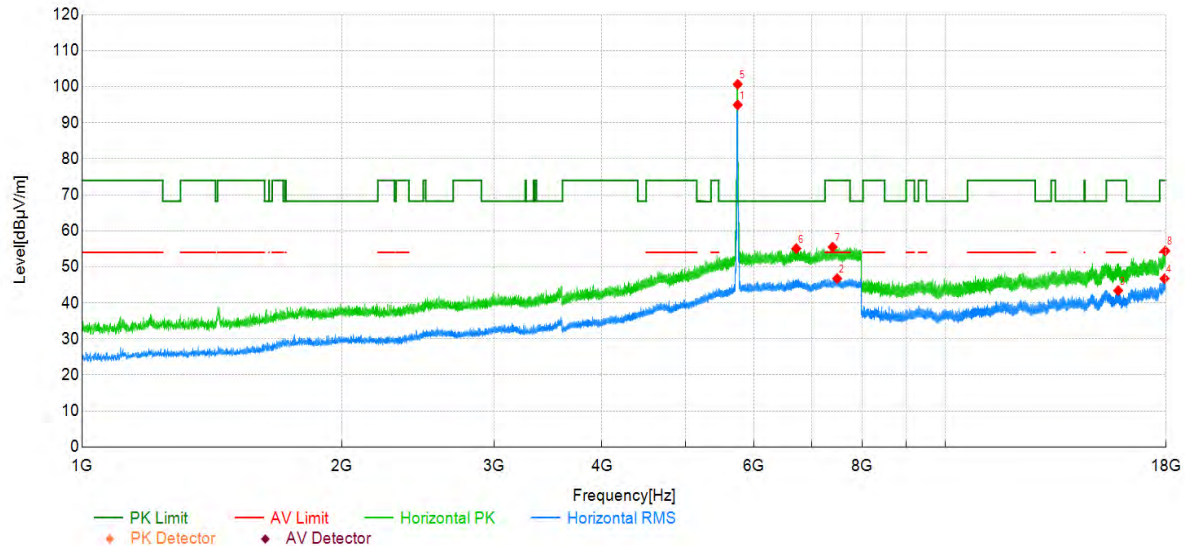
Test Graph



Data List

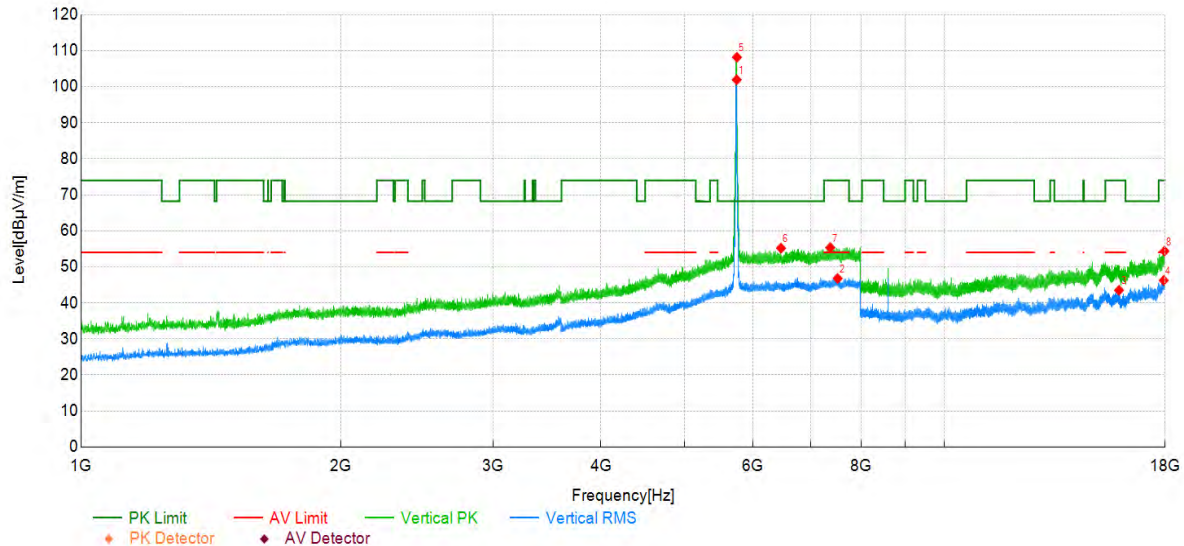
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5827.90	87.72	13.59	101.31	-	-	RMS	Vertical	NA
2	7448.05	30.29	16.64	46.93	54.00	7.07	RMS	Vertical	PASS
3	15421.33	31.38	11.88	43.26	54.00	10.74	RMS	Vertical	PASS
4	17984.33	29.87	16.74	46.61	54.00	7.39	RMS	Vertical	PASS
5	5823.70	94.74	13.61	108.35	-	-	PK	Vertical	NA
6	6742.80	40.48	14.98	55.46	68.20	12.74	PK	Vertical	PASS
7	7790.00	39.17	16.54	55.71	68.20	12.49	PK	Vertical	PASS
8	17975.00	37.70	16.67	54.37	74.00	19.63	PK	Vertical	PASS

Project Information			
Mode:	802.11ac20	Band:	U-NII-3
Bandwidth	20MHz	Channel	149
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

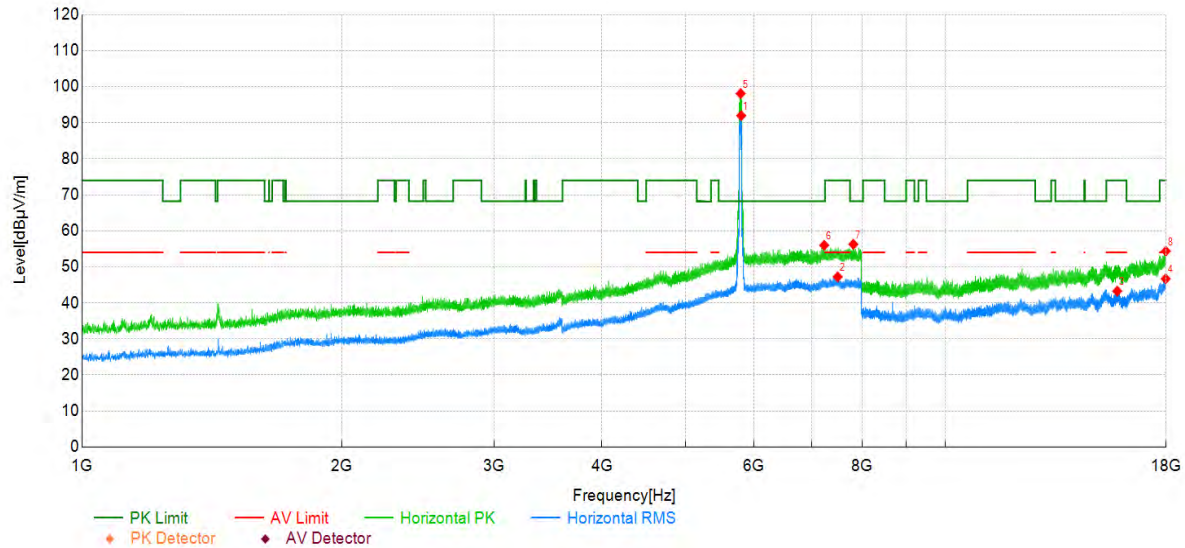
Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5744.25	81.74	13.19	94.93	-	-	RMS	Horizontal	NA
2	7489.00	30.06	16.69	46.75	54.00	7.25	RMS	Horizontal	PASS
3	15843.00	31.89	11.52	43.41	54.00	10.59	RMS	Horizontal	PASS
4	17927.33	30.42	16.31	46.73	54.00	7.27	RMS	Horizontal	PASS
5	5743.90	87.46	13.19	100.65	-	-	PK	Horizontal	NA
6	6715.50	40.17	14.90	55.07	68.20	13.13	PK	Horizontal	PASS
7	7398.70	39.27	16.21	55.48	74.00	18.52	PK	Horizontal	PASS
8	17967.67	37.81	16.61	54.42	74.00	19.58	PK	Horizontal	PASS

Project Information			
Mode:	802.11ac20	Band:	U-NII-3
Bandwidth	20MHz	Channel	149
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

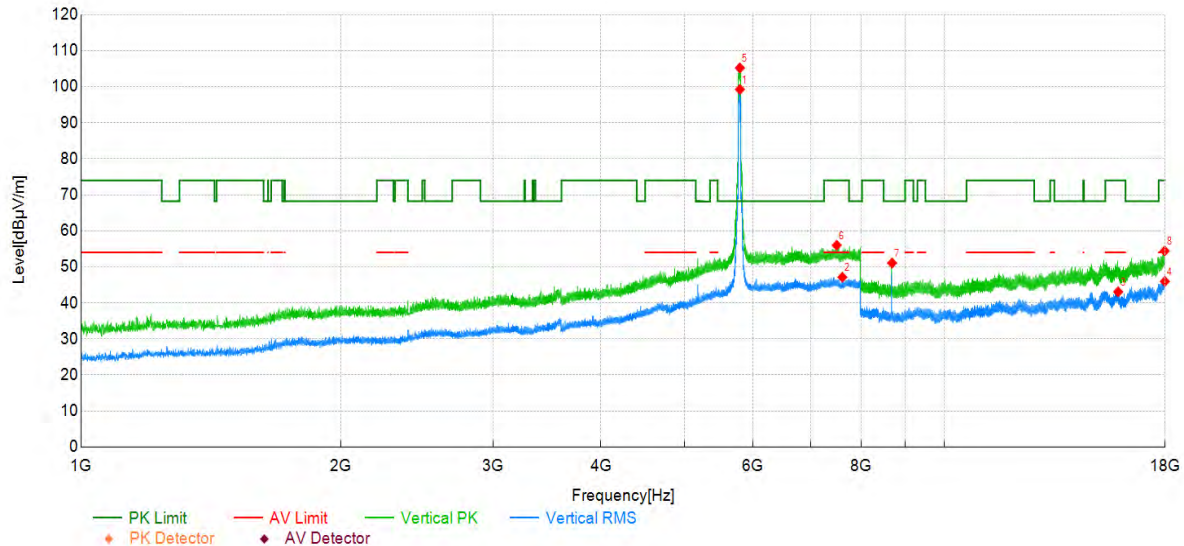
Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5744.25	88.73	13.19	101.92	-	-	RMS	Vertical	NA
2	7517.35	30.19	16.59	46.78	54.00	7.22	RMS	Vertical	PASS
3	15921.33	31.91	11.59	43.50	54.00	10.50	RMS	Vertical	PASS
4	17936.67	29.86	16.38	46.24	54.00	7.76	RMS	Vertical	PASS
5	5747.40	94.93	13.22	108.15	-	-	PK	Vertical	NA
6	6464.20	41.22	13.96	55.18	68.20	13.02	PK	Vertical	PASS
7	7371.40	39.04	16.30	55.34	74.00	18.66	PK	Vertical	PASS
8	17974.67	37.70	16.67	54.37	74.00	19.63	PK	Vertical	PASS

Project Information			
Mode:	802.11ac40	Band:	U-NII-3
Bandwidth	40MHz	Channel	159
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

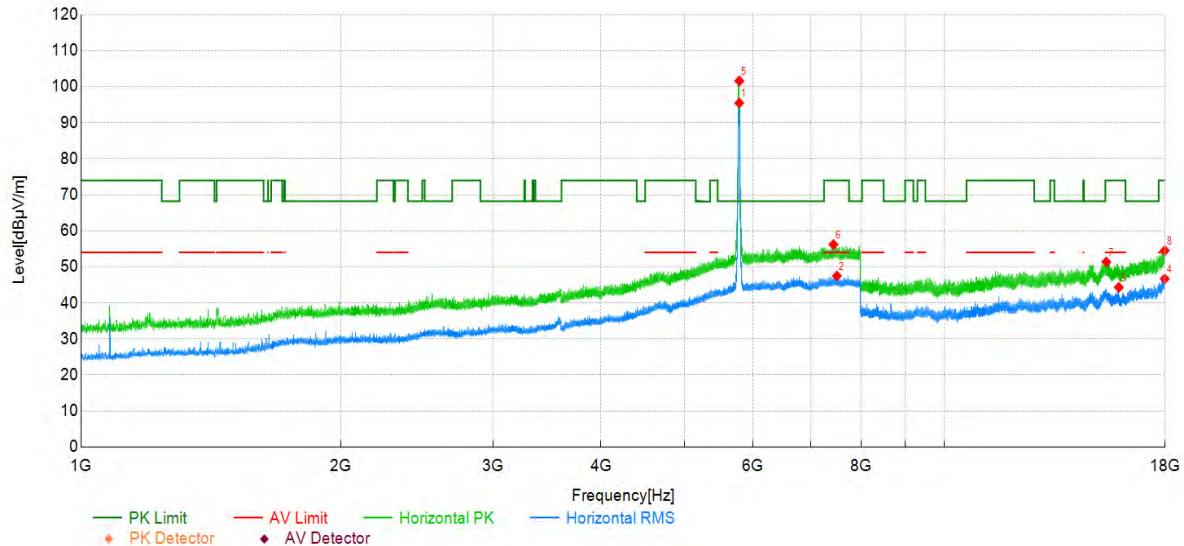
Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5797.80	78.25	13.70	91.95	-	-	RMS	Horizontal	NA
2	7498.80	30.52	16.70	47.22	54.00	6.78	RMS	Horizontal	PASS
3	15803.33	31.96	11.31	43.27	54.00	10.73	RMS	Horizontal	PASS
4	17987.00	29.92	16.76	46.68	54.00	7.32	RMS	Horizontal	PASS
5	5788.35	84.47	13.61	98.08	-	-	PK	Horizontal	NA
6	7233.50	39.81	16.17	55.98	68.20	12.22	PK	Horizontal	PASS
7	7819.40	39.73	16.54	56.27	68.20	11.93	PK	Horizontal	PASS
8	17994.00	37.55	16.82	54.37	74.00	19.63	PK	Horizontal	PASS

Project Information			
Mode:	802.11ac40	Band:	U-NII-3
Bandwidth	40MHz	Channel	159
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

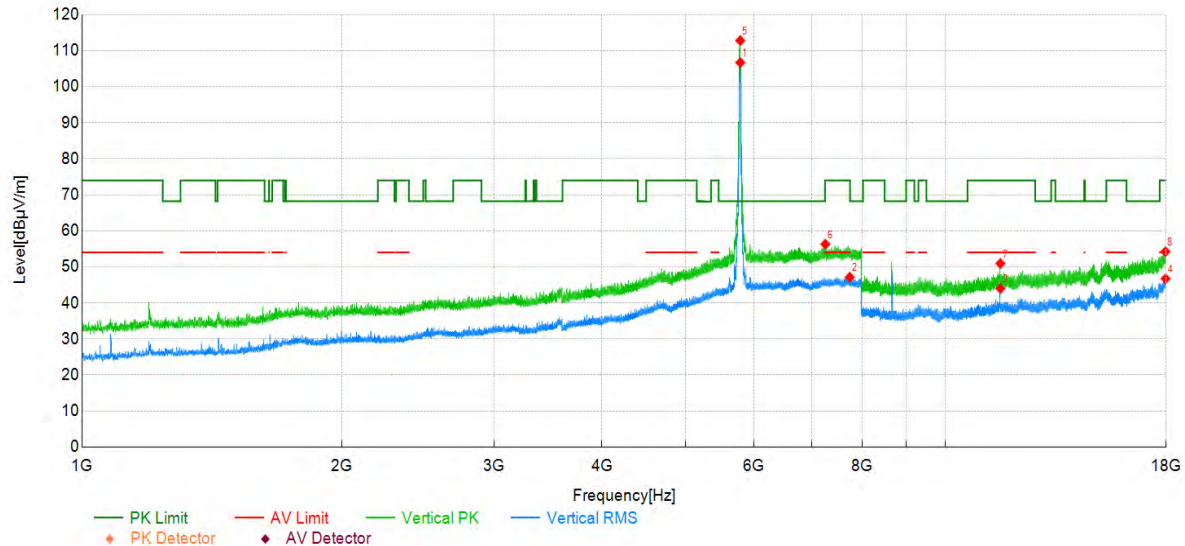
Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5792.90	85.58	13.66	99.24	-	-	RMS	Vertical	NA
2	7613.25	31.18	15.96	47.14	54.00	6.86	RMS	Vertical	PASS
3	15886.33	31.32	11.76	43.08	54.00	10.92	RMS	Vertical	PASS
4	17990.33	29.16	16.79	45.95	54.00	8.05	RMS	Vertical	PASS
5	5792.90	91.54	13.66	105.20	-	-	PK	Vertical	NA
6	7499.50	39.28	16.71	55.99	74.00	18.01	PK	Vertical	PASS
7	8692.67	49.61	1.45	51.06	68.20	17.14	PK	Vertical	PASS
8	17983.00	37.67	16.73	54.40	74.00	19.60	PK	Vertical	PASS

Project Information			
Mode:	802.11ax20	Band:	U-NII-3
Bandwidth	20MHz	Channel	157
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

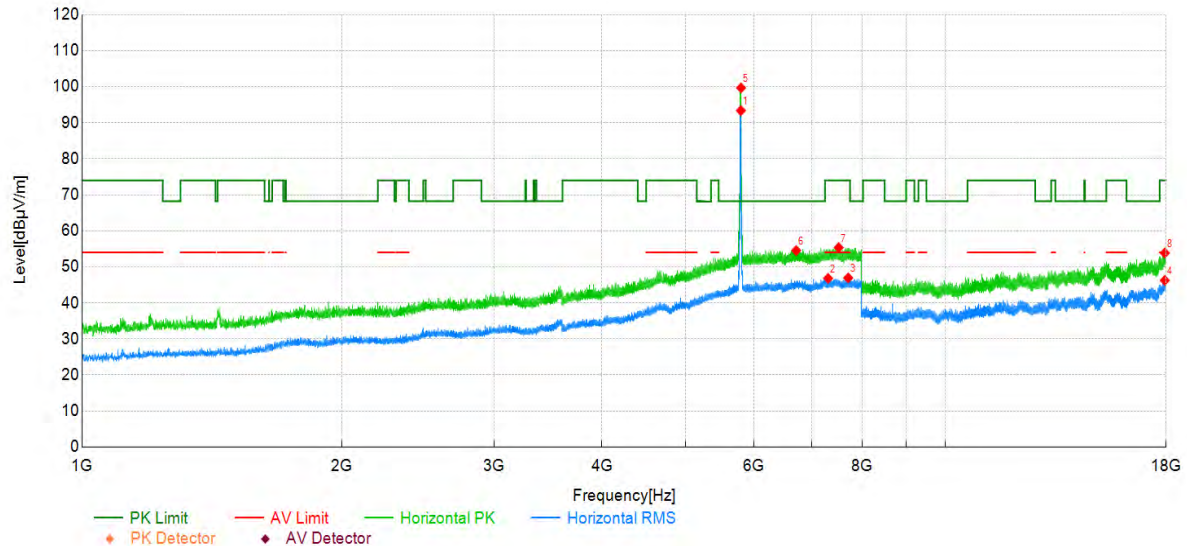
Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5783.45	81.90	13.57	95.47	-	-	RMS	Horizontal	NA
2	7502.65	30.79	16.69	47.48	54.00	6.52	RMS	Horizontal	PASS
3	15913.00	32.63	11.68	44.31	54.00	9.69	RMS	Horizontal	PASS
4	17987.33	29.92	16.76	46.68	54.00	7.32	RMS	Horizontal	PASS
5	5783.10	88.02	13.56	101.58	-	-	PK	Horizontal	NA
6	7435.10	39.66	16.53	56.19	74.00	17.81	PK	Horizontal	PASS
7	15389.00	39.45	11.90	51.35	74.00	22.65	PK	Horizontal	PASS
8	17990.33	37.73	16.79	54.52	74.00	19.48	PK	Horizontal	PASS

Project Information			
Mode:	802.11ax20	Band:	U-NII-3
Bandwidth	20MHz	Channel	157
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

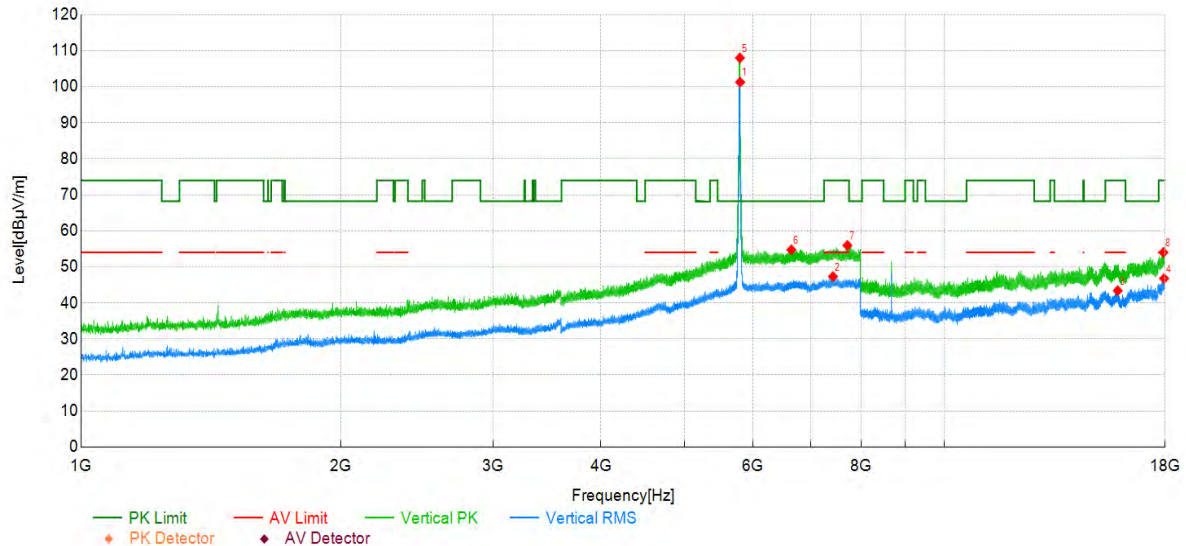
Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5784.15	93.12	13.57	106.69	-	-	RMS	Vertical	NA
2	7745.20	30.60	16.54	47.14	54.00	6.86	RMS	Vertical	PASS
3	11570.67	37.43	6.55	43.98	54.00	10.02	RMS	Vertical	PASS
4	17978.00	30.03	16.69	46.72	54.00	7.28	RMS	Vertical	PASS
5	5784.15	99.20	13.57	112.77	-	-	PK	Vertical	NA
6	7255.90	40.04	16.25	56.29	74.00	17.71	PK	Vertical	PASS
7	11573.67	44.39	6.55	50.94	74.00	23.06	PK	Vertical	PASS
8	17971.67	37.57	16.65	54.22	74.00	19.78	PK	Vertical	PASS

Project Information			
Mode:	802.11ax40	Band:	U-NII-3
Bandwidth	40MHz	Channel	159
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5793.60	79.71	13.66	93.37	-	-	RMS	Horizontal	NA
2	7309.10	30.65	16.15	46.80	54.00	7.20	RMS	Horizontal	PASS
3	7711.60	30.51	16.42	46.93	54.00	7.07	RMS	Horizontal	PASS
4	17937.33	29.86	16.38	46.24	54.00	7.76	RMS	Horizontal	PASS
5	5796.05	85.98	13.68	99.66	-	-	PK	Horizontal	NA
6	6713.40	39.63	14.90	54.53	68.20	13.67	PK	Horizontal	PASS
7	7519.80	38.78	16.57	55.35	74.00	18.65	PK	Horizontal	PASS
8	17941.33	37.42	16.42	53.84	74.00	20.16	PK	Horizontal	PASS

Project Information			
Mode:	802.11ax40	Band:	U-NII-3
Bandwidth	40MHz	Channel	159
SN:	-	Engineer:	Oushuyan
Remark:			

Test Graph

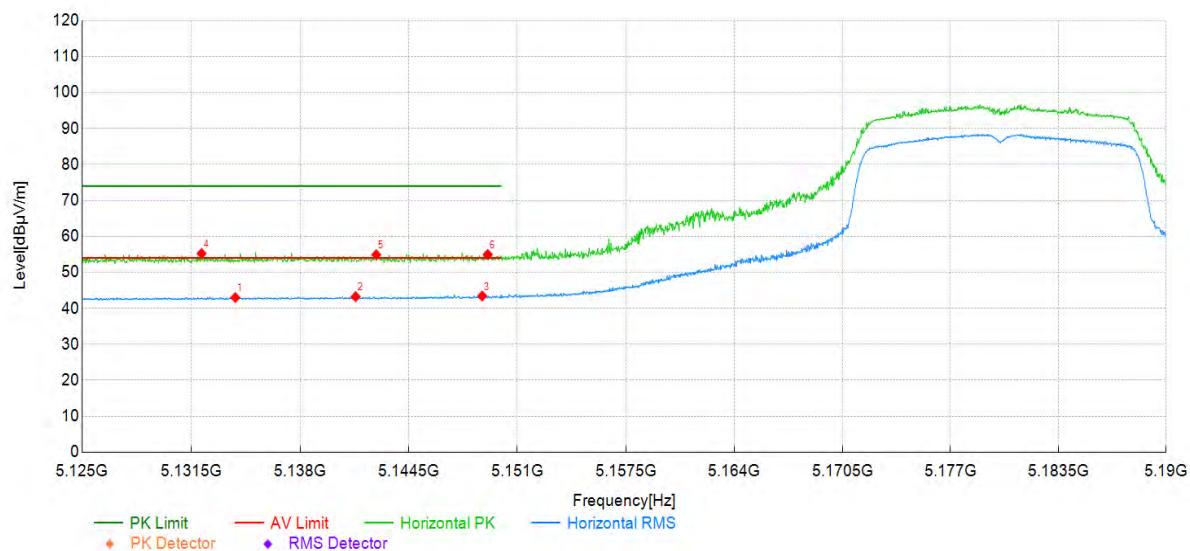
Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5796.75	87.56	13.69	101.25	-	-	RMS	Vertical	NA
2	7425.30	30.87	16.44	47.31	54.00	6.69	RMS	Vertical	PASS
3	15866.33	31.73	11.65	43.38	54.00	10.62	RMS	Vertical	PASS
4	17957.67	30.23	16.54	46.77	54.00	7.23	RMS	Vertical	PASS
5	5793.60	94.32	13.66	107.98	-	-	PK	Vertical	NA
6	6646.55	40.04	14.70	54.74	68.20	13.46	PK	Vertical	PASS
7	7716.85	39.51	16.44	55.95	74.00	18.05	PK	Vertical	PASS
8	17923.00	37.73	16.27	54.00	74.00	20.00	PK	Vertical	PASS

Radiated Band Edge

Test Result

Project Information			
Mode:	802.11a	Band:	U-NII-1
Bandwidth	20MHz	Channel	36
SN:	-	Engineer:	Oushuyan
Remark:	Powersetting 17		

Test Graph

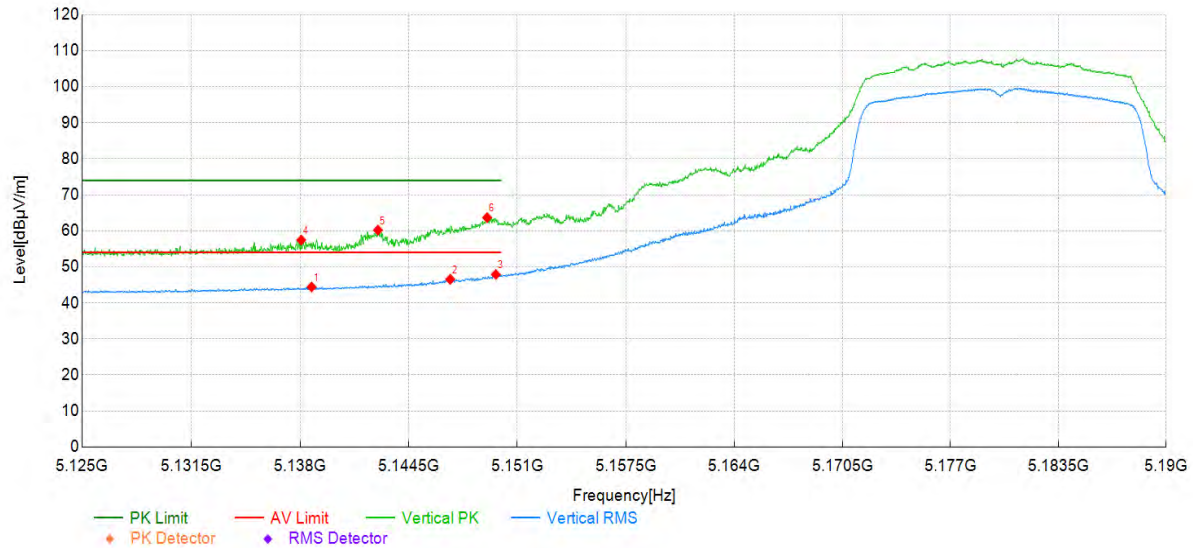


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5134.14	33.10	9.90	43.00	54.00	11.00	RMS	Horizontal	PASS
2	5141.32	33.33	9.92	43.25	54.00	10.75	RMS	Horizontal	PASS
3	5148.90	33.50	9.94	43.44	54.00	10.56	RMS	Horizontal	PASS
4	5132.12	45.35	9.90	55.25	74.00	18.75	PK	Horizontal	PASS
5	5142.56	44.99	9.92	54.91	74.00	19.09	PK	Horizontal	PASS
6	5149.22	45.03	9.94	54.97	74.00	19.03	PK	Horizontal	PASS

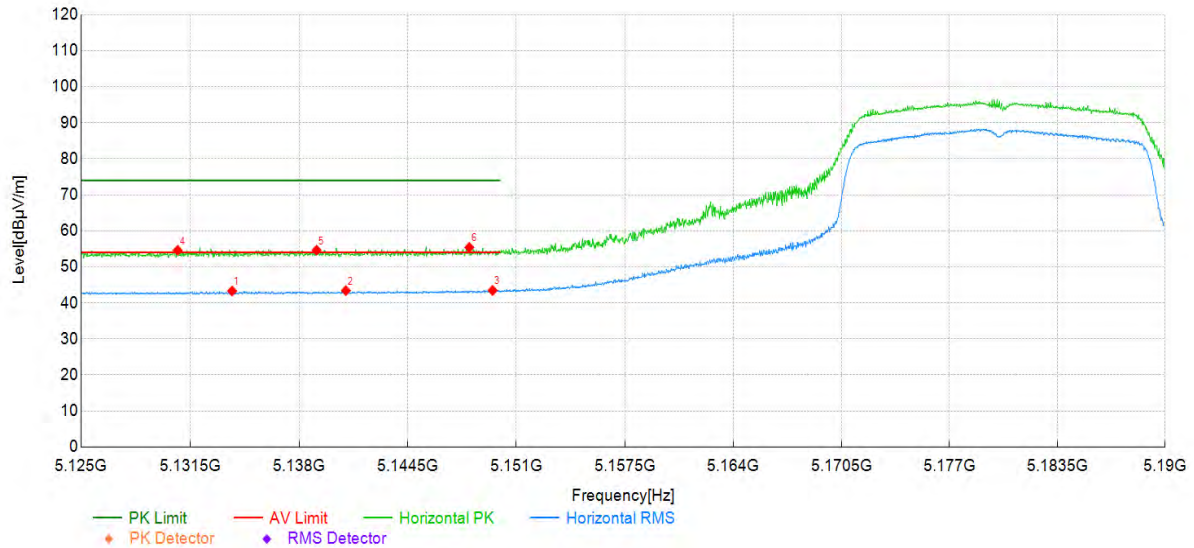
Project Information			
Mode:	802.11a	Band:	U-NII-1
Bandwidth	20MHz	Channel	36
SN:	-	Engineer:	Oushuyan
Remark:	Powersetting 17		

Test Graph



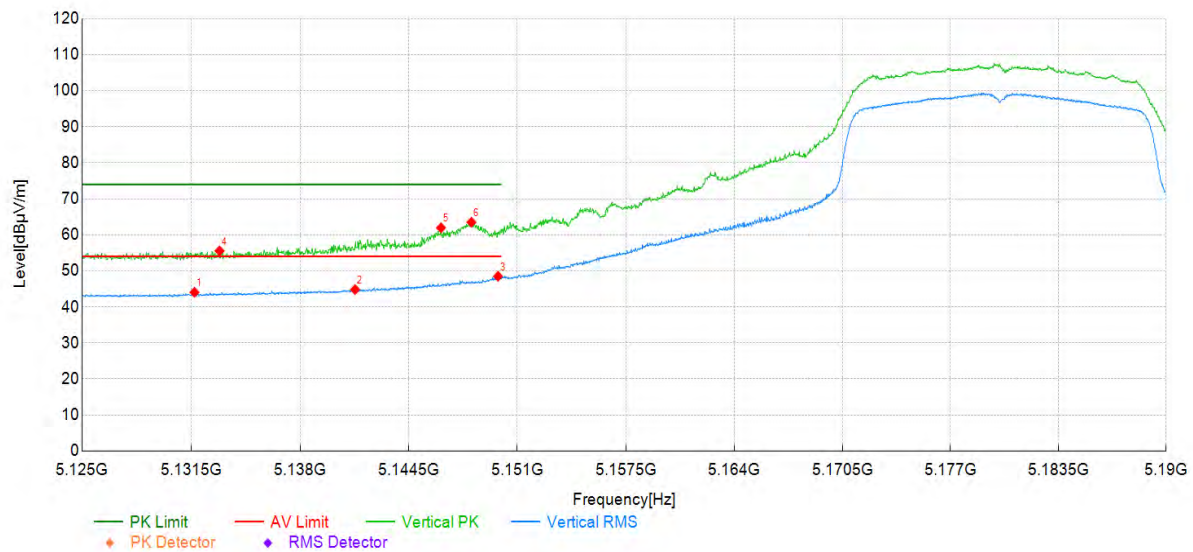
Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5138.69	34.50	9.91	44.41	54.00	9.59	RMS	Vertical	PASS
2	5146.98	36.62	9.93	46.55	54.00	7.45	RMS	Vertical	PASS
3	5149.71	37.95	9.94	47.89	54.00	6.11	RMS	Vertical	PASS
4	5138.07	47.53	9.91	57.44	74.00	16.56	PK	Vertical	PASS
5	5142.66	50.28	9.92	60.20	74.00	13.80	PK	Vertical	PASS
6	5149.19	53.73	9.94	63.67	74.00	10.33	PK	Vertical	PASS

Project Information			
Mode:	802.11ac20	Band:	U-NII-1
Bandwidth	20MHz	Channel	36
SN:	-	Engineer:	Oushuyan
Remark:	Powersetting 17		

Test Graph

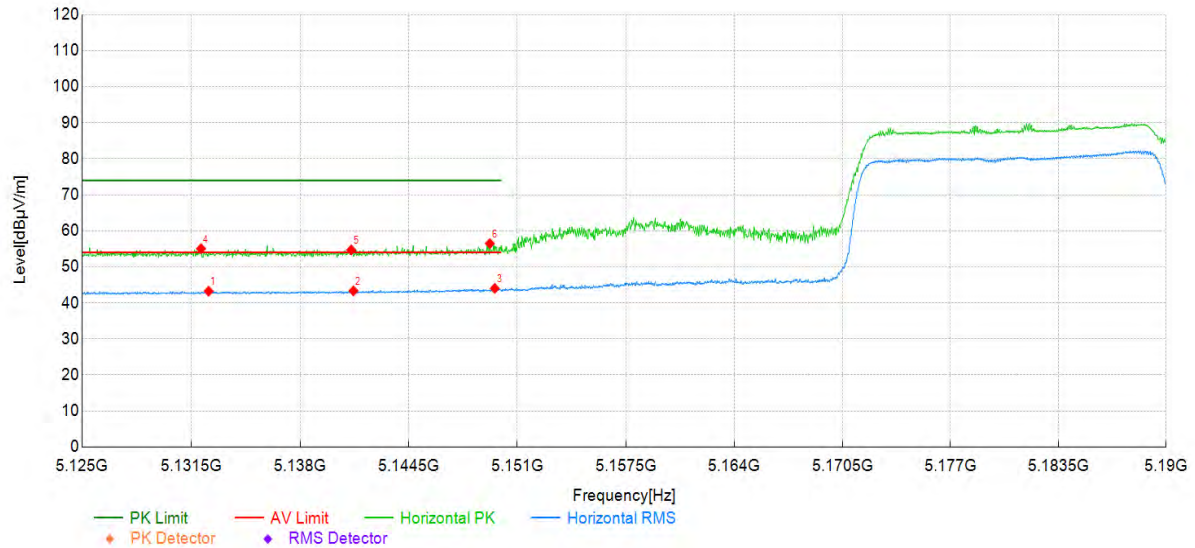
Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5134.01	33.39	9.90	43.29	54.00	10.71	RMS	Horizontal	PASS
2	5140.80	33.48	9.92	43.40	54.00	10.60	RMS	Horizontal	PASS
3	5149.58	33.52	9.94	43.46	54.00	10.54	RMS	Horizontal	PASS
4	5130.76	44.70	9.89	54.59	74.00	19.41	PK	Horizontal	PASS
5	5139.05	44.70	9.91	54.61	74.00	19.39	PK	Horizontal	PASS
6	5148.18	45.46	9.94	55.40	74.00	18.60	PK	Horizontal	PASS

Project Information			
Mode:	802.11ac20	Band:	U-NII-1
Bandwidth	20MHz	Channel	36
SN:	-	Engineer:	Oushuyan
Remark:	Powersetting 17		

Test Graph

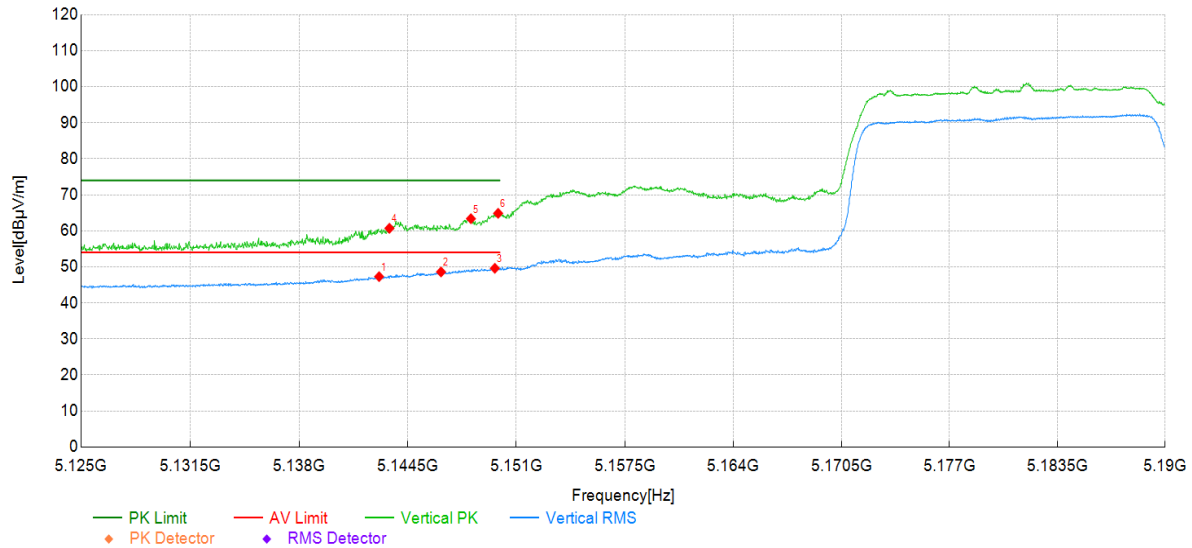
Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5131.70	34.15	9.90	44.05	54.00	9.95	RMS	Vertical	PASS
2	5141.29	34.88	9.92	44.80	54.00	9.20	RMS	Vertical	PASS
3	5149.84	38.55	9.94	48.49	54.00	5.51	RMS	Vertical	PASS
4	5133.19	45.65	9.90	55.55	74.00	18.45	PK	Vertical	PASS
5	5146.43	52.02	9.93	61.95	74.00	12.05	PK	Vertical	PASS
6	5148.25	53.56	9.94	63.50	74.00	10.50	PK	Vertical	PASS

Project Information			
Mode:	802.11ac40	Band:	U-NII-1
Bandwidth	40MHz	Channel	38
SN:	-	Engineer:	Oushuyan
Remark:	Powersetting 15.5		

Test Graph

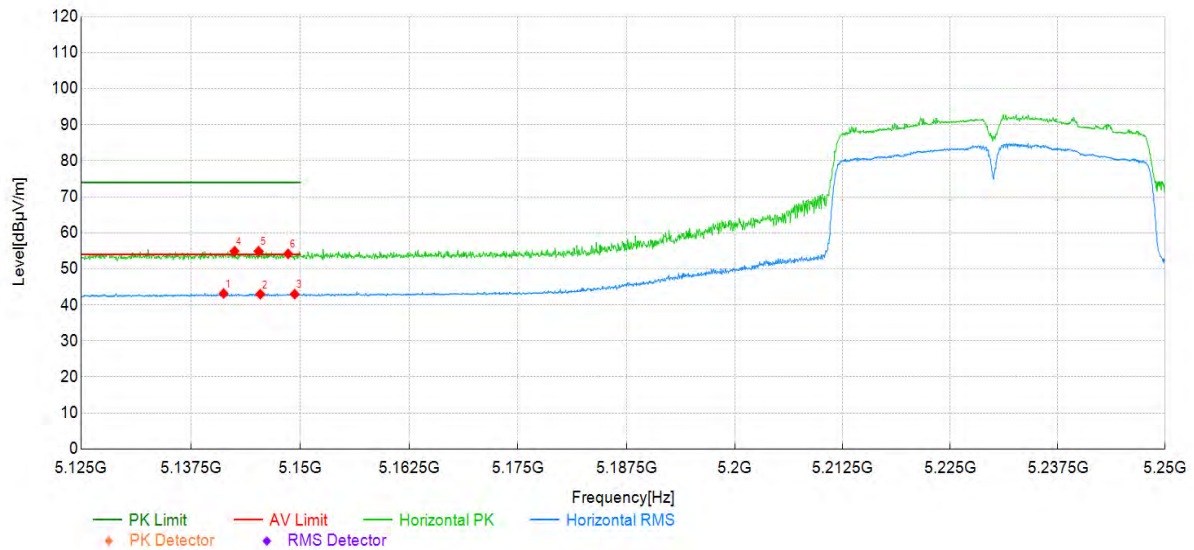
Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5132.54	33.35	9.90	43.25	54.00	10.75	RMS	Horizontal	PASS
2	5141.19	33.43	9.92	43.35	54.00	10.65	RMS	Horizontal	PASS
3	5149.65	34.08	9.94	44.02	54.00	9.98	RMS	Horizontal	PASS
4	5132.09	45.14	9.90	55.04	74.00	18.96	PK	Horizontal	PASS
5	5141.06	44.77	9.92	54.69	74.00	19.31	PK	Horizontal	PASS
6	5149.35	46.53	9.94	56.47	74.00	17.53	PK	Horizontal	PASS

Project Information			
Mode:	802.11ac40	Band:	U-NII-1
Bandwidth	40MHz	Channel	38
SN:	-	Engineer:	Oushuyan
Remark:	Powersetting 15.5		

Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5142.79	37.37	9.92	47.29	54.00	6.71	RMS	Vertical	PASS
2	5146.49	38.66	9.93	48.59	54.00	5.41	RMS	Vertical	PASS
3	5149.71	39.66	9.94	49.60	54.00	4.40	RMS	Vertical	PASS
4	5143.40	50.78	9.92	60.70	74.00	13.30	PK	Vertical	PASS
5	5148.28	53.42	9.94	63.36	74.00	10.64	PK	Vertical	PASS
6	5149.91	54.92	9.94	64.86	74.00	9.14	PK	Vertical	PASS

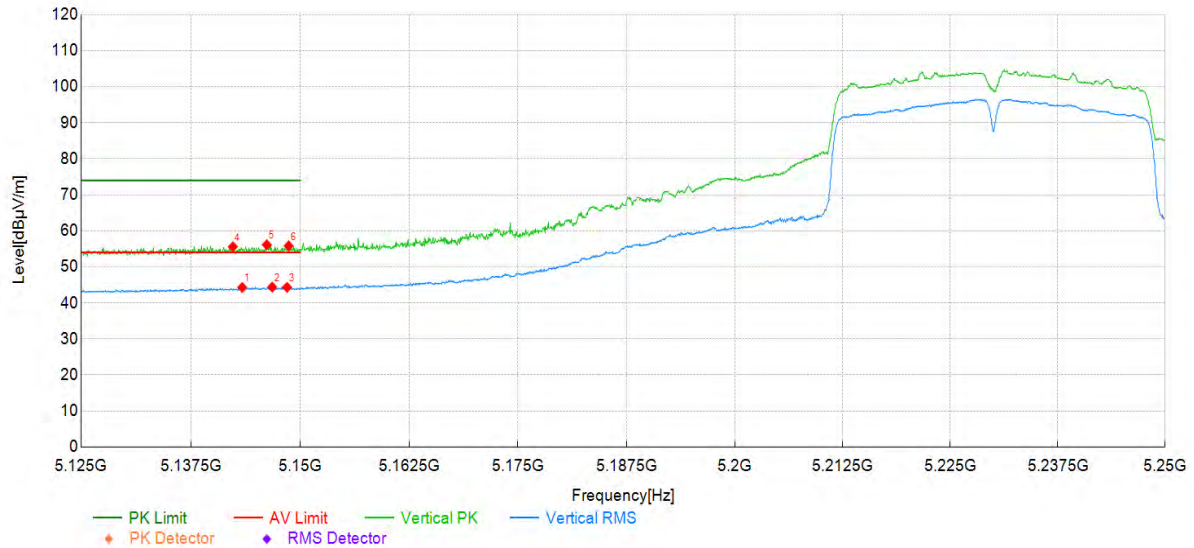
Project Information			
Mode:	802.11ac40	Band:	U-NII-1
Bandwidth	40MHz	Channel	46
SN:	-	Engineer:	Oushuyan
Remark:	Powersetting 17		

Test Graph

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5141.26	33.25	9.92	43.17	54.00	10.83	Horizontal	PASS
2	5145.45	33.04	9.93	42.97	54.00	11.03	Horizontal	PASS
3	5149.39	33.04	9.94	42.98	54.00	11.02	Horizontal	PASS
4	5142.51	44.98	9.92	54.90	74.00	19.10	Horizontal	PASS
5	5145.26	44.95	9.93	54.88	74.00	19.12	Horizontal	PASS
6	5148.64	44.23	9.94	54.17	74.00	19.83	Horizontal	PASS

Project Information			
Mode:	802.11ac40	Band:	U-NII-1
Bandwidth	40MHz	Channel	46
SN:	-	Engineer:	Oushuyan
Remark:	Powersetting 17		

Test Graph

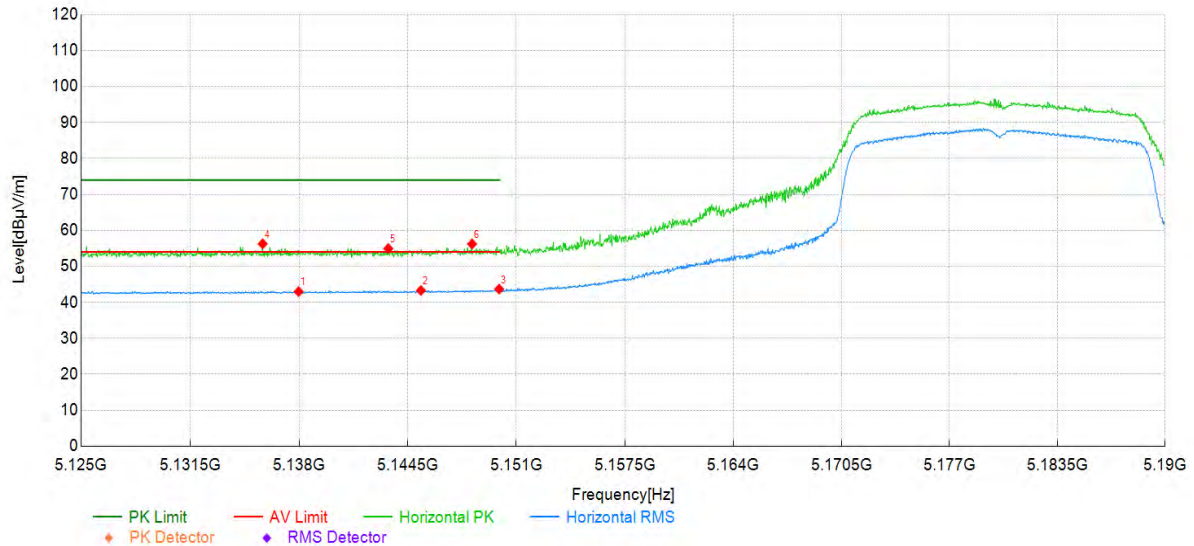


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5143.38	34.35	9.92	44.27	54.00	9.73	Vertical	PASS
2	5146.82	34.45	9.93	44.38	54.00	9.62	Vertical	PASS
3	5148.51	34.37	9.94	44.31	54.00	9.69	Vertical	PASS
4	5142.32	45.67	9.92	55.59	74.00	18.41	Vertical	PASS
5	5146.20	46.20	9.93	56.13	74.00	17.87	Vertical	PASS
6	5148.70	45.87	9.94	55.81	74.00	18.19	Vertical	PASS

Project Information			
Mode:	802.11ax20	Band:	U-NII-1
Bandwidth	20MHz	Channel	36
SN:	-	Engineer:	Oushuyan
Remark:	Powersetting 17		

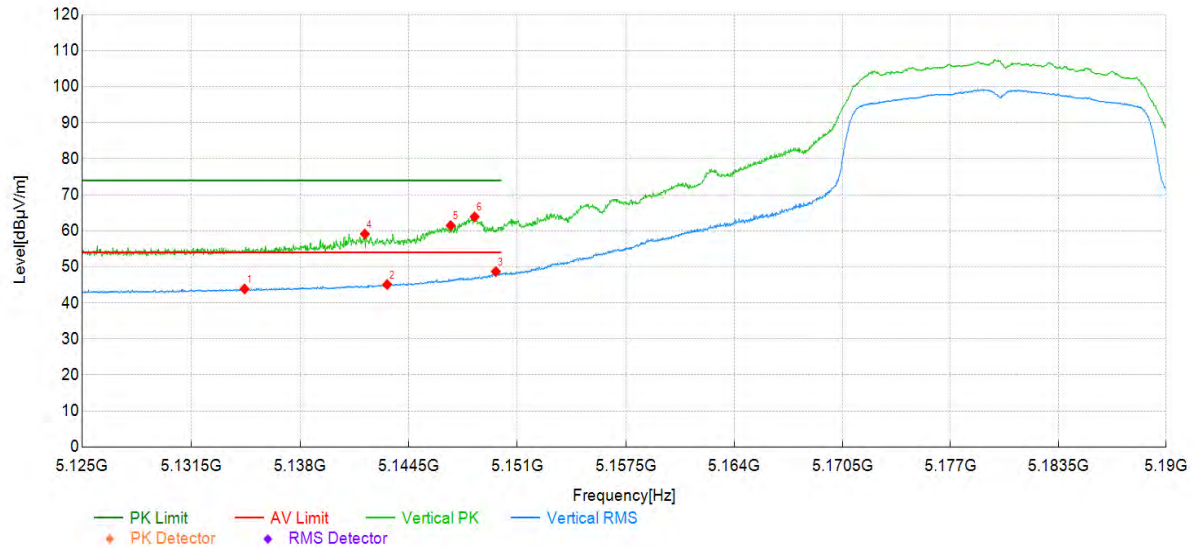
Test Graph



Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5137.97	33.07	9.91	42.98	54.00	11.02	RMS	Horizontal	PASS
2	5145.29	33.36	9.93	43.29	54.00	10.71	RMS	Horizontal	PASS
3	5149.97	33.74	9.94	43.68	54.00	10.32	RMS	Horizontal	PASS
4	5135.83	46.34	9.91	56.25	74.00	17.75	PK	Horizontal	PASS
5	5143.34	45.02	9.92	54.94	74.00	19.06	PK	Horizontal	PASS
6	5148.35	46.28	9.94	56.22	74.00	17.78	PK	Horizontal	PASS

Project Information			
Mode:	802.11ax20	Band:	U-NII-1
Bandwidth	20MHz	Channel	36
SN:	-	Engineer:	Oushuyan
Remark:	Powersetting 17		

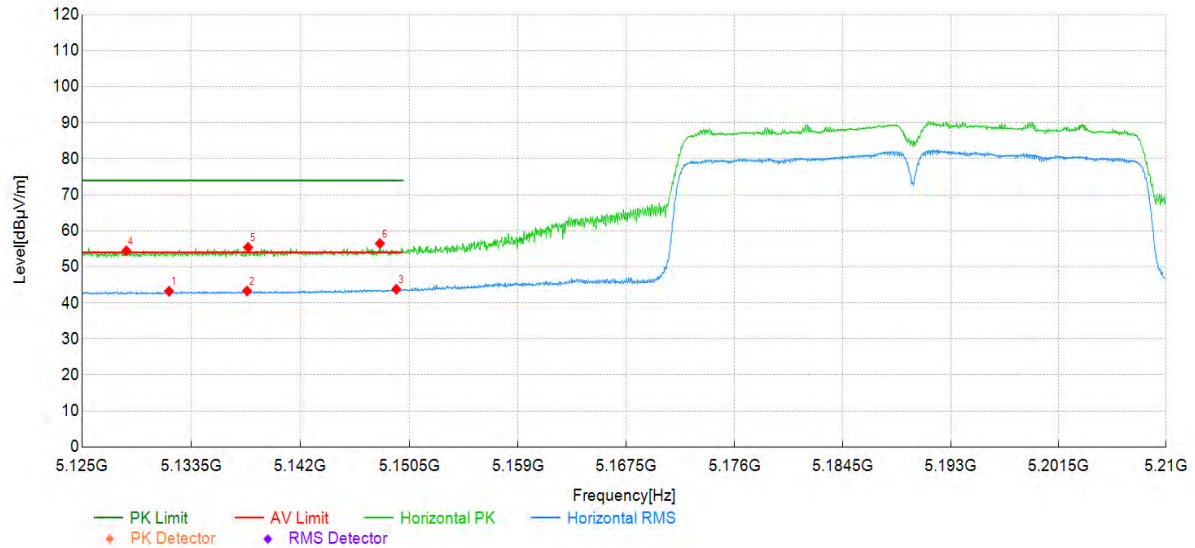
Test Graph



Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5134.69	33.96	9.90	43.86	54.00	10.14	RMS	Vertical	PASS
2	5143.21	35.18	9.92	45.10	54.00	8.90	RMS	Vertical	PASS
3	5149.71	38.75	9.94	48.69	54.00	5.31	RMS	Vertical	PASS
4	5141.88	49.21	9.92	59.13	74.00	14.87	PK	Vertical	PASS
5	5147.01	51.52	9.93	61.45	74.00	12.55	PK	Vertical	PASS
6	5148.44	53.96	9.94	63.90	74.00	10.10	PK	Vertical	PASS

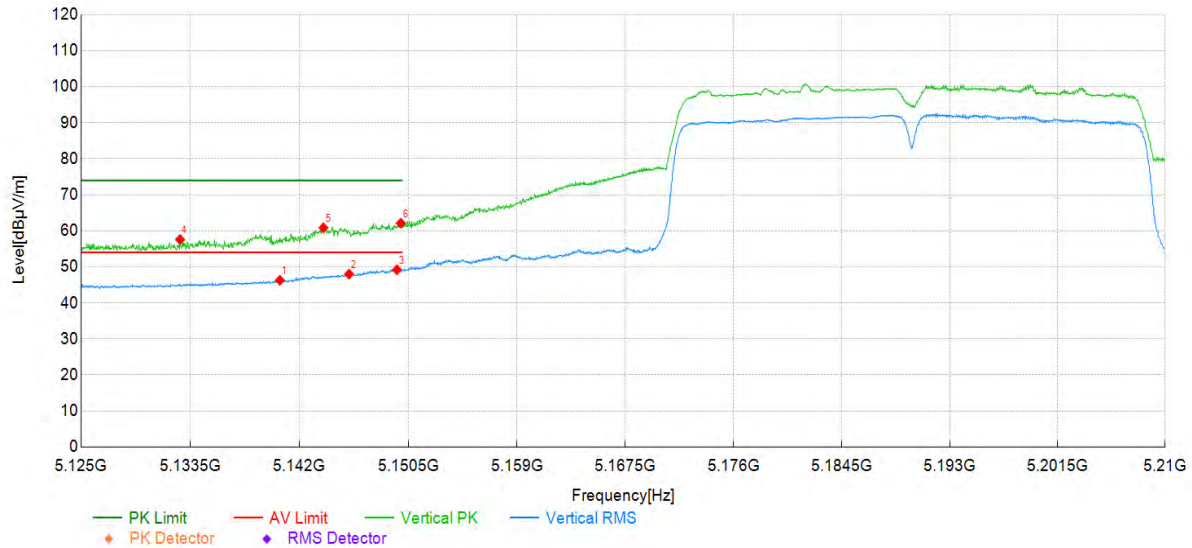
Project Information			
Mode:	802.11ax40	Band:	U-NII-1
Bandwidth	40MHz	Channel	38
SN:	-	Engineer:	Oushuyan
Remark:	Powersetting 15.5		

Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5131.76	33.36	9.90	43.26	54.00	10.74	RMS	Horizontal	PASS
2	5137.84	33.40	9.91	43.31	54.00	10.69	RMS	Horizontal	PASS
3	5149.49	33.85	9.94	43.79	54.00	10.21	RMS	Horizontal	PASS
4	5128.44	44.57	9.89	54.46	74.00	19.54	PK	Horizontal	PASS
5	5137.93	45.48	9.91	55.39	74.00	18.61	PK	Horizontal	PASS
6	5148.22	46.54	9.94	56.48	74.00	17.52	PK	Horizontal	PASS

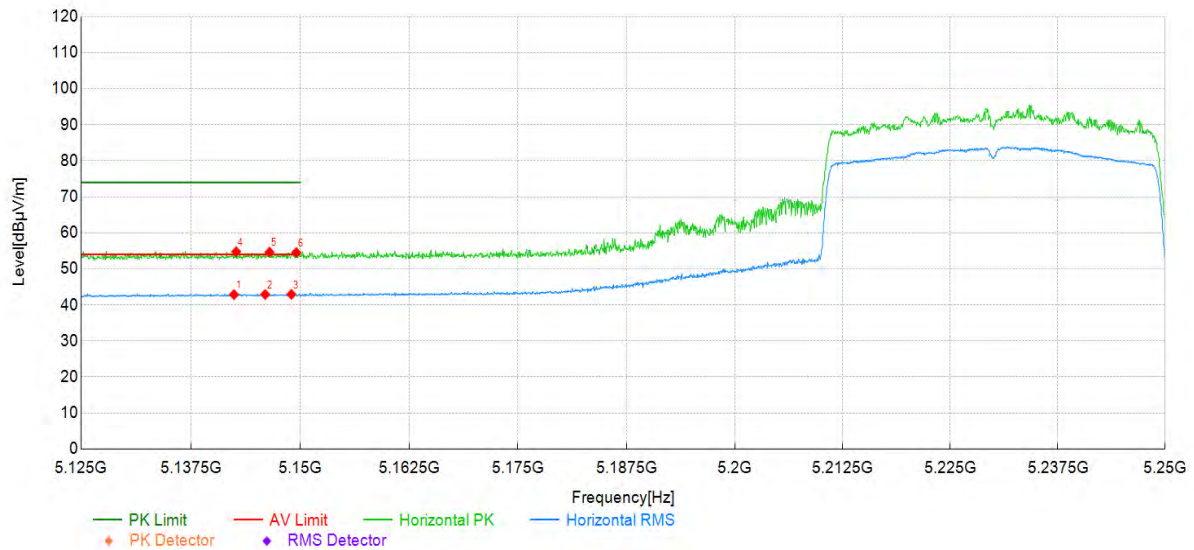
Project Information			
Mode:	802.11ax40	Band:	U-NII-1
Bandwidth	40MHz	Channel	38
SN:	-	Engineer:	Oushuyan
Remark:	Powersetting 15.5		

Test Graph



Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5140.48	36.36	9.92	46.28	54.00	7.72	RMS	Vertical	PASS
2	5145.88	38.05	9.93	47.98	54.00	6.02	RMS	Vertical	PASS
3	5149.62	39.27	9.94	49.21	54.00	4.79	RMS	Vertical	PASS
4	5132.70	47.69	9.90	57.59	74.00	16.41	PK	Vertical	PASS
5	5143.88	50.92	9.93	60.85	74.00	13.15	PK	Vertical	PASS
6	5149.92	52.17	9.94	62.11	74.00	11.89	PK	Vertical	PASS

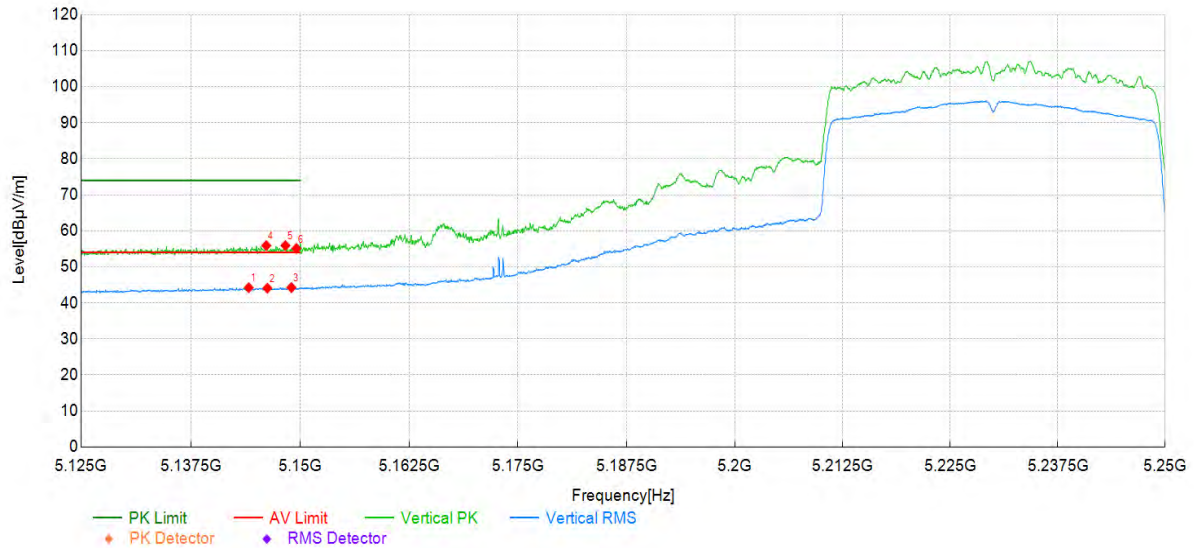
Project Information			
Mode:	802.11ax40	Band:	U-NII-1
Bandwidth	40MHz	Channel	46
SN:	-	Engineer:	Oushuyan
Remark:	Powersetting 17		

Test Graph

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5142.45	32.94	9.92	42.86	54.00	11.14	Horizontal	PASS
2	5146.01	32.97	9.93	42.90	54.00	11.10	Horizontal	PASS
3	5149.01	32.99	9.94	42.93	54.00	11.07	Horizontal	PASS
4	5142.70	44.86	9.92	54.78	74.00	19.22	Horizontal	PASS
5	5146.51	44.70	9.93	54.63	74.00	19.37	Horizontal	PASS
6	5149.57	44.61	9.94	54.55	74.00	19.45	Horizontal	PASS

Project Information			
Mode:	802.11ax40	Band:	U-NII-1
Bandwidth	40MHz	Channel	46
SN:	-	Engineer:	Oushuyan
Remark:	Powersetting 17		

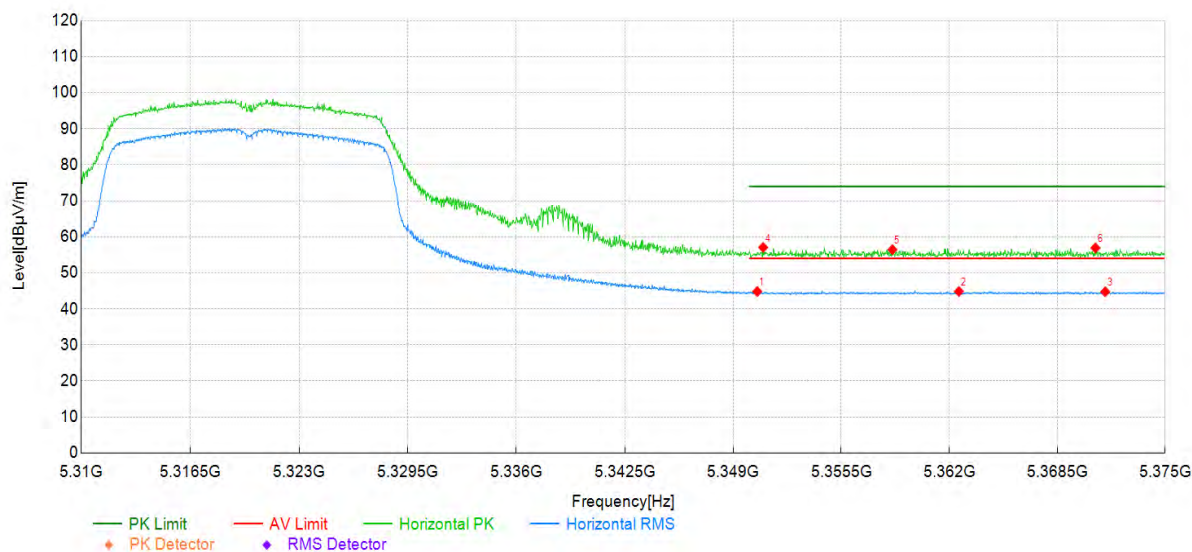
Test Graph



Data List

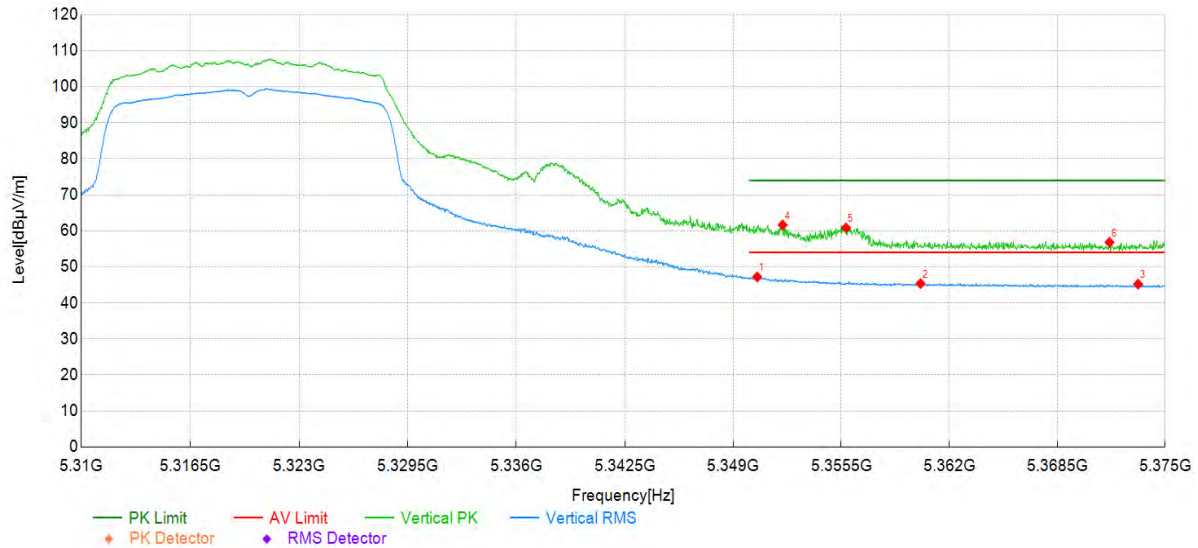
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5144.13	34.28	9.93	44.21	54.00	9.79	Vertical	PASS
2	5146.26	34.14	9.93	44.07	54.00	9.93	Vertical	PASS
3	5149.01	34.31	9.94	44.25	54.00	9.75	Vertical	PASS
4	5146.14	45.97	9.93	55.90	74.00	18.10	Vertical	PASS
5	5148.32	45.96	9.94	55.90	74.00	18.10	Vertical	PASS
6	5149.57	45.17	9.94	55.11	74.00	18.89	Vertical	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-2A
Bandwidth	20MHz	Channel	64
SN:	-	Engineer:	Mike Ou
Remark:	Powersetting 17		

Test Graph

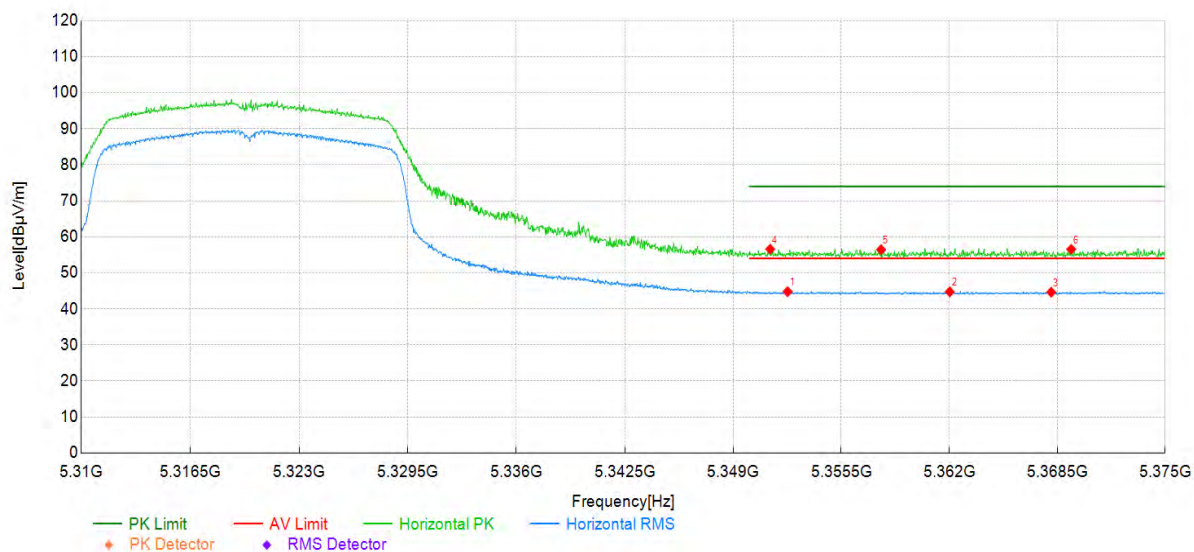
Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5350.45	34.01	10.80	44.81	54.00	9.19	RMS	Horizontal	PASS
2	5362.58	33.96	10.88	44.84	54.00	9.16	RMS	Horizontal	PASS
3	5371.39	33.81	10.94	44.75	54.00	9.25	RMS	Horizontal	PASS
4	5350.81	46.25	10.80	57.05	74.00	16.95	PK	Horizontal	PASS
5	5358.58	45.59	10.85	56.44	74.00	17.56	PK	Horizontal	PASS
6	5370.81	45.99	10.93	56.92	74.00	17.08	PK	Horizontal	PASS

Project Information			
Mode:	802.11a	Band:	U-NII-2A
Bandwidth	20MHz	Channel	64
SN:	-	Engineer:	Mike Ou
Remark:	Powersetting 17		

Test Graph

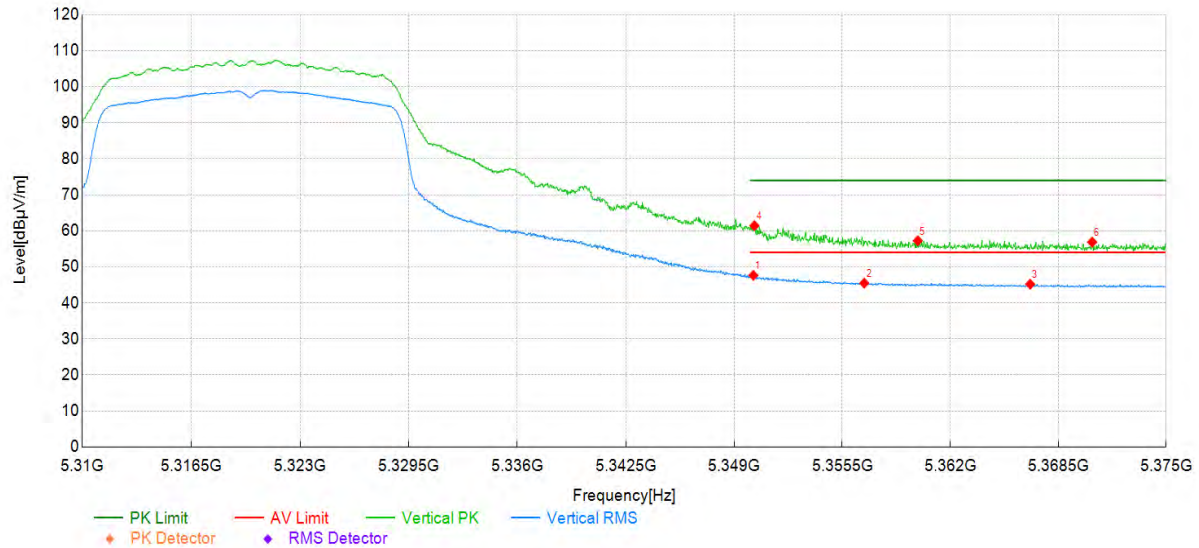
Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5350.45	36.42	10.80	47.22	54.00	6.78	RMS	Vertical	PASS
2	5360.27	34.51	10.86	45.37	54.00	8.63	RMS	Vertical	PASS
3	5373.37	34.26	10.95	45.21	54.00	8.79	RMS	Vertical	PASS
4	5351.98	50.82	10.81	61.63	74.00	12.37	PK	Vertical	PASS
5	5355.78	50.00	10.83	60.83	74.00	13.17	PK	Vertical	PASS
6	5371.65	45.86	10.94	56.80	74.00	17.20	PK	Vertical	PASS

Project Information			
Mode:	802.11ac20	Band:	U-NII-2A
Bandwidth	20MHz	Channel	64
SN:	-	Engineer:	Mike Ou
Remark:	Powersetting 17		

Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5352.27	33.96	10.82	44.78	54.00	9.22	RMS	Horizontal	PASS
2	5362.03	33.85	10.88	44.73	54.00	9.27	RMS	Horizontal	PASS
3	5368.14	33.71	10.91	44.62	54.00	9.38	RMS	Horizontal	PASS
4	5351.23	45.77	10.80	56.57	74.00	17.43	PK	Horizontal	PASS
5	5357.90	45.58	10.85	56.43	74.00	17.57	PK	Horizontal	PASS
6	5369.34	45.61	10.93	56.54	74.00	17.46	PK	Horizontal	PASS

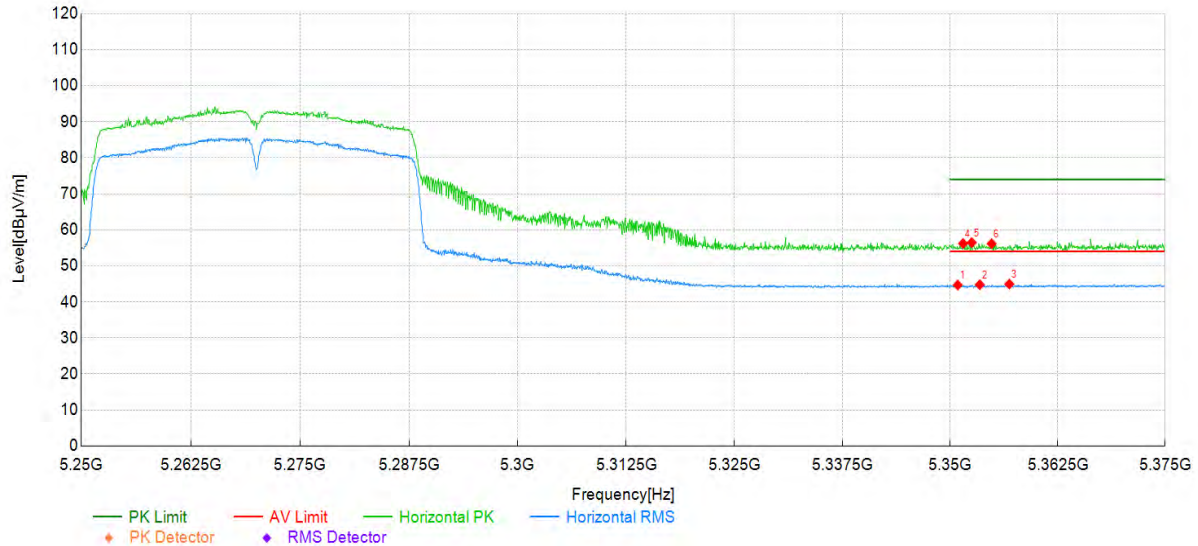
Project Information			
Mode:	802.11ac20	Band:	U-NII-2A
Bandwidth	20MHz	Channel	64
SN:	-	Engineer:	Mike Ou
Remark:	Powersetting 17		

Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5350.16	36.83	10.80	47.63	54.00	6.37	RMS	Vertical	PASS
2	5356.82	34.64	10.85	45.49	54.00	8.51	RMS	Vertical	PASS
3	5366.81	34.27	10.91	45.18	54.00	8.82	RMS	Vertical	PASS
4	5350.22	50.63	10.80	61.43	74.00	12.57	PK	Vertical	PASS
5	5360.04	46.38	10.86	57.24	74.00	16.76	PK	Vertical	PASS
6	5370.55	45.93	10.93	56.86	74.00	17.14	PK	Vertical	PASS

Project Information			
Mode:	802.11ac40	Band:	U-NII-2A
Bandwidth	40MHz	Channel	54
SN:	-	Engineer:	Mike Ou
Remark:	Powersetting 17		

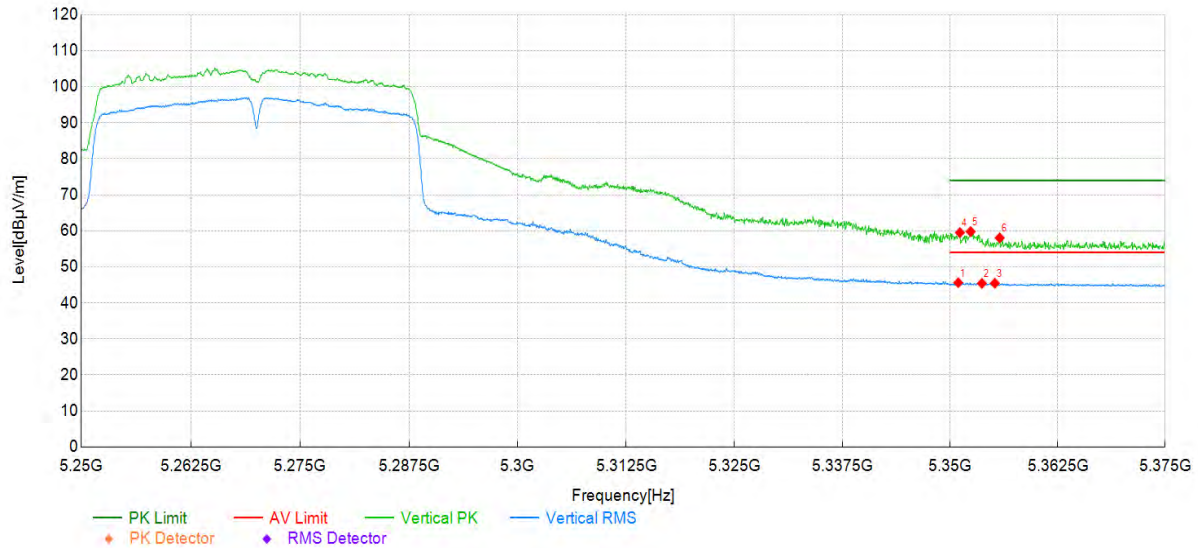
Test Graph



Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5350.86	33.88	10.80	44.68	54.00	9.32	Horizontal	PASS
2	5353.43	33.93	10.82	44.75	54.00	9.25	Horizontal	PASS
3	5356.87	34.09	10.85	44.94	54.00	9.06	Horizontal	PASS
4	5351.49	45.39	10.81	56.20	74.00	17.80	Horizontal	PASS
5	5352.49	45.63	10.82	56.45	74.00	17.55	Horizontal	PASS
6	5354.80	45.33	10.83	56.16	74.00	17.84	Horizontal	PASS

Project Information			
Mode:	802.11ac40	Band:	U-NII-2A
Bandwidth	40MHz	Channel	54
SN:	-	Engineer:	Mike Ou
Remark:	Powersetting 17		

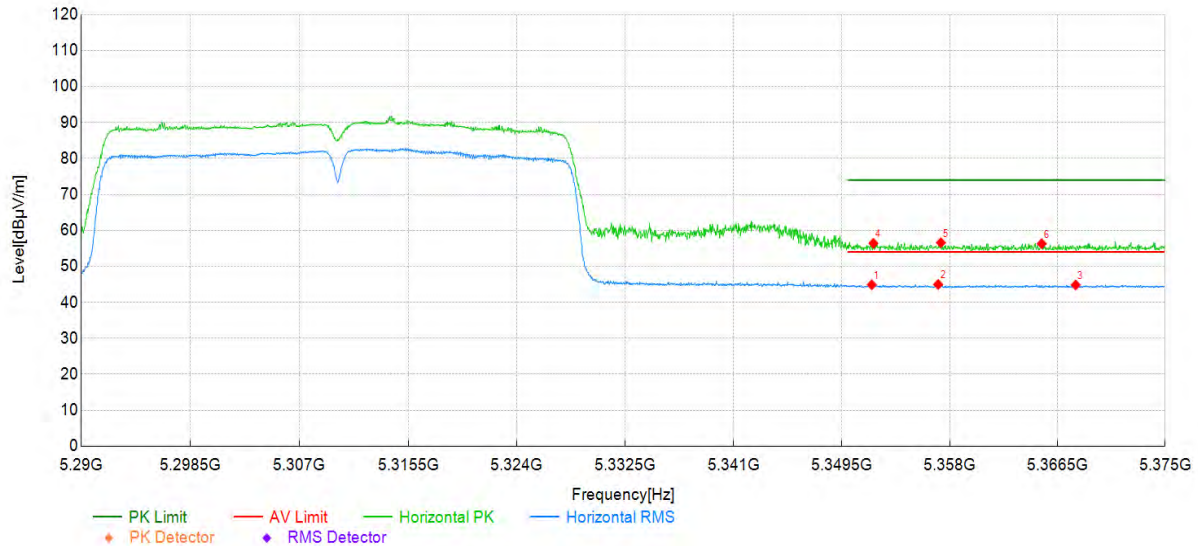
Test Graph



Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5350.93	34.81	10.80	45.61	54.00	8.39	Vertical	PASS
2	5353.68	34.59	10.82	45.41	54.00	8.59	Vertical	PASS
3	5355.18	34.63	10.83	45.46	54.00	8.54	Vertical	PASS
4	5351.11	48.70	10.80	59.50	74.00	14.50	Vertical	PASS
5	5352.36	48.97	10.82	59.79	74.00	14.21	Vertical	PASS
6	5355.74	47.22	10.83	58.05	74.00	15.95	Vertical	PASS

Project Information			
Mode:	802.11ac40	Band:	U-NII-2A
Bandwidth	40MHz	Channel	62
SN:	-	Engineer:	Mike Ou
Remark:	Powersetting 15.5		

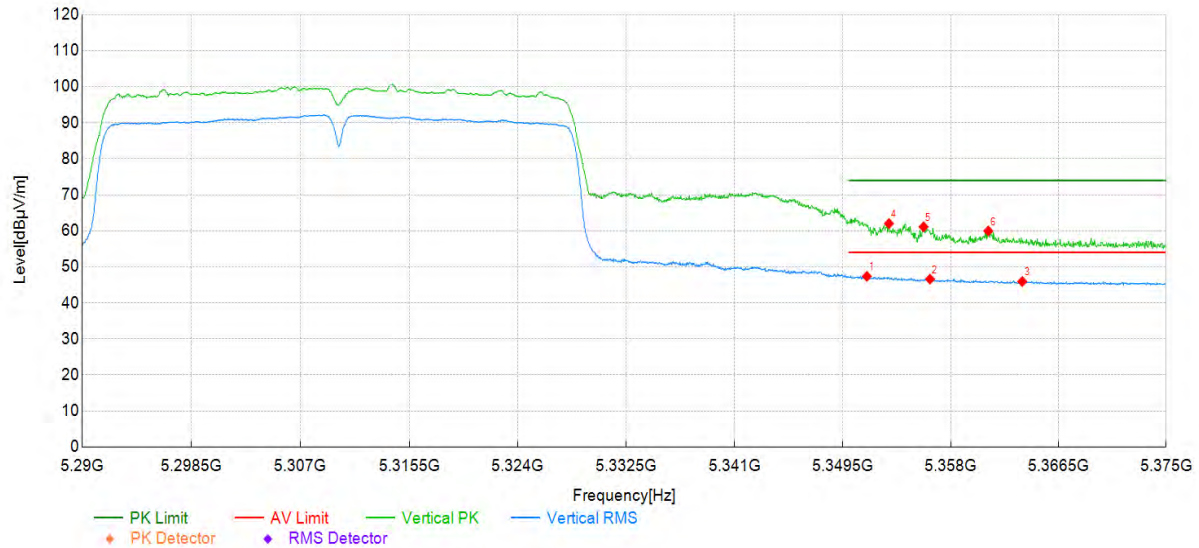
Test Graph



Data List

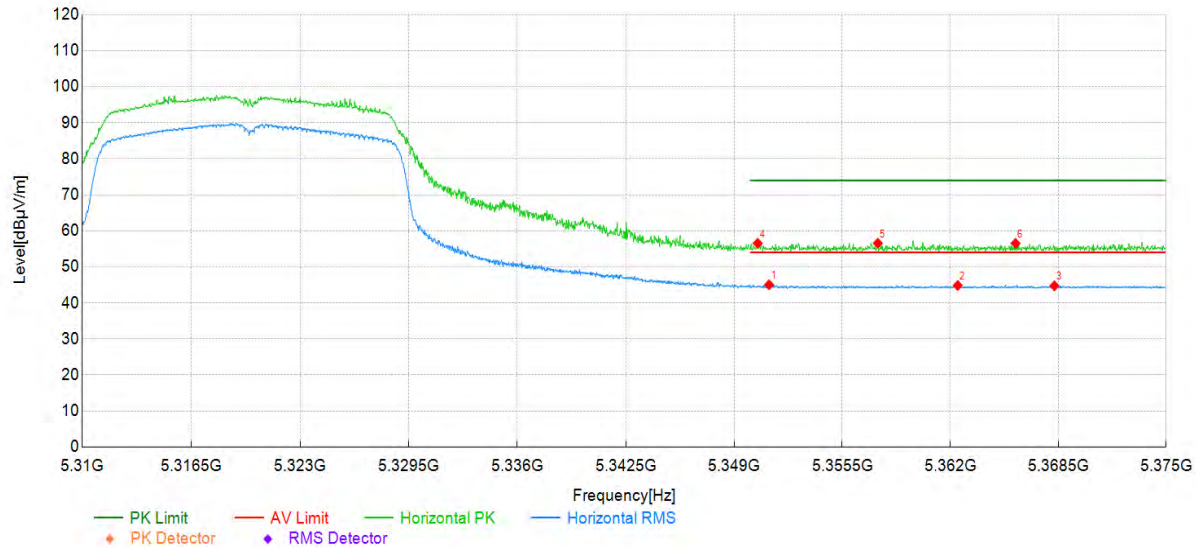
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5351.87	34.07	10.81	44.88	54.00	9.12	RMS	Horizontal	PASS
2	5357.10	34.11	10.85	44.96	54.00	9.04	RMS	Horizontal	PASS
3	5367.94	33.93	10.91	44.84	54.00	9.16	RMS	Horizontal	PASS
4	5352.00	45.60	10.81	56.41	74.00	17.59	PK	Horizontal	PASS
5	5357.31	45.72	10.85	56.57	74.00	17.43	PK	Horizontal	PASS
6	5365.26	45.39	10.90	56.29	74.00	17.71	PK	Horizontal	PASS

Project Information			
Mode:	802.11ac40	Band:	U-NII-2A
Bandwidth	40MHz	Channel	62
SN:	-	Engineer:	Mike Ou
Remark:	Powersetting 15.5		

Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5351.40	36.56	10.81	47.37	54.00	6.63	RMS	Vertical	PASS
2	5356.38	35.75	10.85	46.60	54.00	7.40	RMS	Vertical	PASS
3	5363.65	35.06	10.88	45.94	54.00	8.06	RMS	Vertical	PASS
4	5353.14	51.18	10.82	62.00	74.00	12.00	PK	Vertical	PASS
5	5355.87	50.27	10.83	61.10	74.00	12.90	PK	Vertical	PASS
6	5360.97	49.09	10.87	59.96	74.00	14.04	PK	Vertical	PASS

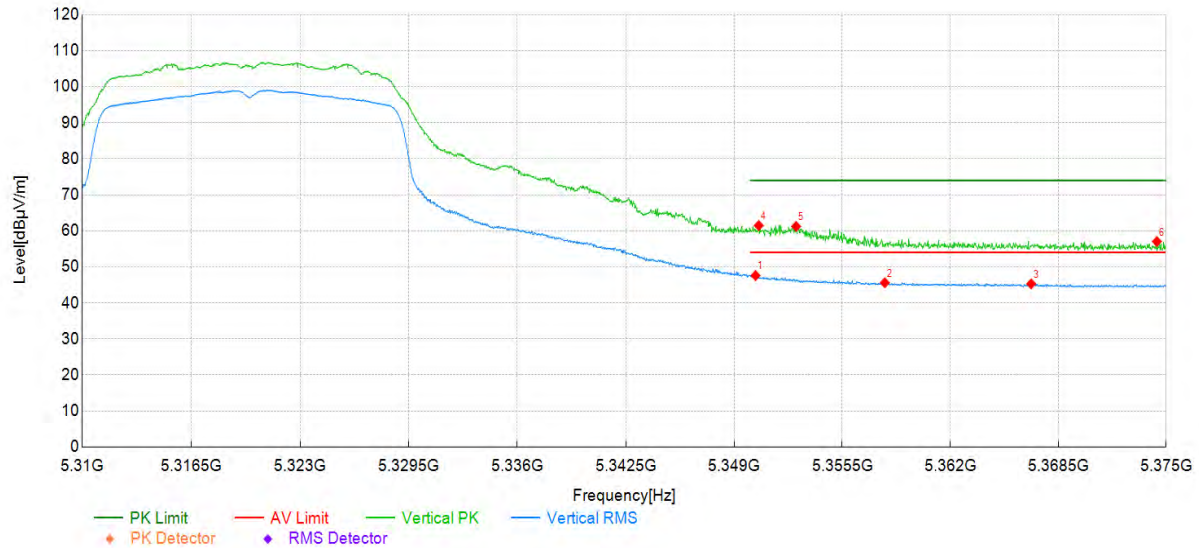
Project Information			
Mode:	802.11ax20	Band:	U-NII-2A
Bandwidth	20MHz	Channel	64
SN:	-	Engineer:	Mike Ou
Remark:	Powersetting 17		

Test Graph

Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5351.10	34.24	10.80	45.04	54.00	8.96	RMS	Horizontal	PASS
2	5362.45	33.96	10.88	44.84	54.00	9.16	RMS	Horizontal	PASS
3	5368.27	33.82	10.91	44.73	54.00	9.27	RMS	Horizontal	PASS
4	5350.42	45.75	10.80	56.55	74.00	17.45	PK	Horizontal	PASS
5	5357.64	45.71	10.85	56.56	74.00	17.44	PK	Horizontal	PASS
6	5365.93	45.63	10.90	56.53	74.00	17.47	PK	Horizontal	PASS

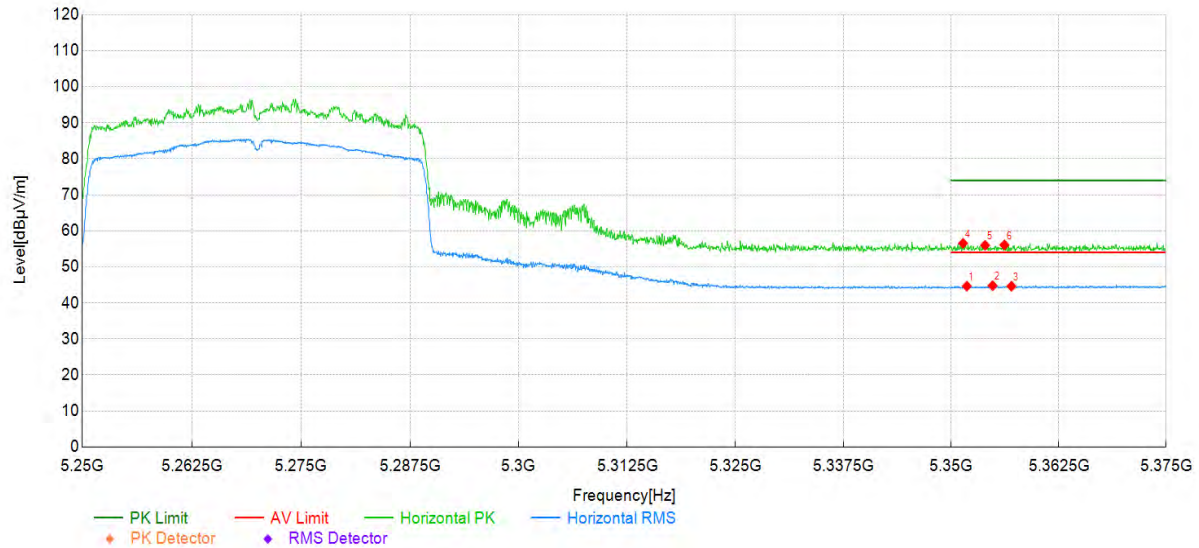
Project Information			
Mode:	802.11ax20	Band:	U-NII-2A
Bandwidth	20MHz	Channel	64
SN:	-	Engineer:	Mike Ou
Remark:	Powersetting 17		

Test Graph



Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity	Verdict
1	5350.29	36.79	10.80	47.59	54.00	6.41	RMS	Vertical	PASS
2	5358.06	34.74	10.85	45.59	54.00	8.41	RMS	Vertical	PASS
3	5366.87	34.37	10.91	45.28	54.00	8.72	RMS	Vertical	PASS
4	5350.48	50.67	10.80	61.47	74.00	12.53	PK	Vertical	PASS
5	5352.73	50.41	10.82	61.23	74.00	12.77	PK	Vertical	PASS
6	5374.45	46.07	10.96	57.03	74.00	16.97	PK	Vertical	PASS

Project Information			
Mode:	802.11ax40	Band:	U-NII-2A
Bandwidth	40MHz	Channel	54
SN:	-	Engineer:	Mike Ou
Remark:	Powersetting 17		

Test Graph**Data List**

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	5351.80	33.83	10.81	44.64	54.00	9.36	Horizontal	PASS
2	5354.80	33.94	10.83	44.77	54.00	9.23	Horizontal	PASS
3	5356.99	33.79	10.85	44.64	54.00	9.36	Horizontal	PASS
4	5351.36	45.71	10.81	56.52	74.00	17.48	Horizontal	PASS
5	5353.93	45.14	10.83	55.97	74.00	18.03	Horizontal	PASS
6	5356.18	45.24	10.83	56.07	74.00	17.93	Horizontal	PASS