




Plot 38:

Test Date	2024-08-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2a MIMO 2
Signal	IEEE 802.11n
Frequency	5260
SAR 10g (W/Kg)	0.051
SAR 1g (W/Kg)	0.089
ConvF	1.83
Relative permittivity	36.65
Conductivity (S/m)	4.92

Maximum location: X=8.00, Y=-32.00 ; SAR Peak: 0.46 W/kg

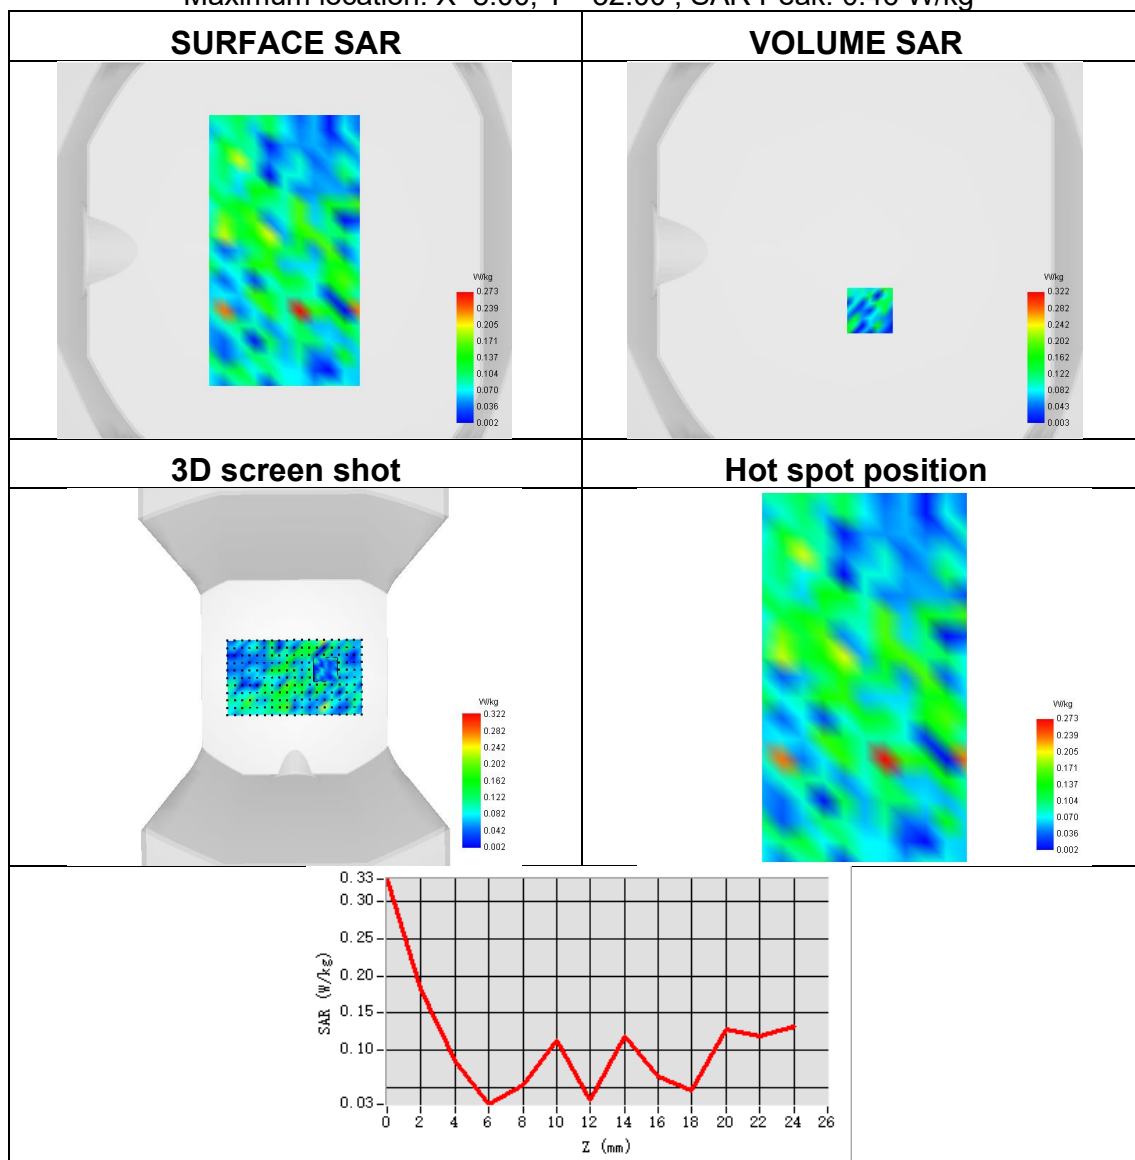




Plot 39:

Test Date	2024-08-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-2c ANT 1
Signal	IEEE 802.11a
Frequency	5700
SAR 10g (W/Kg)	0.046
SAR 1g (W/Kg)	0.143
ConvF	1.86
Relative permittivity	35.79
Conductivity (S/m)	5.06

Maximum location: X=-24.00, Y=-24.00 ; SAR Peak: 1.35 W/kg

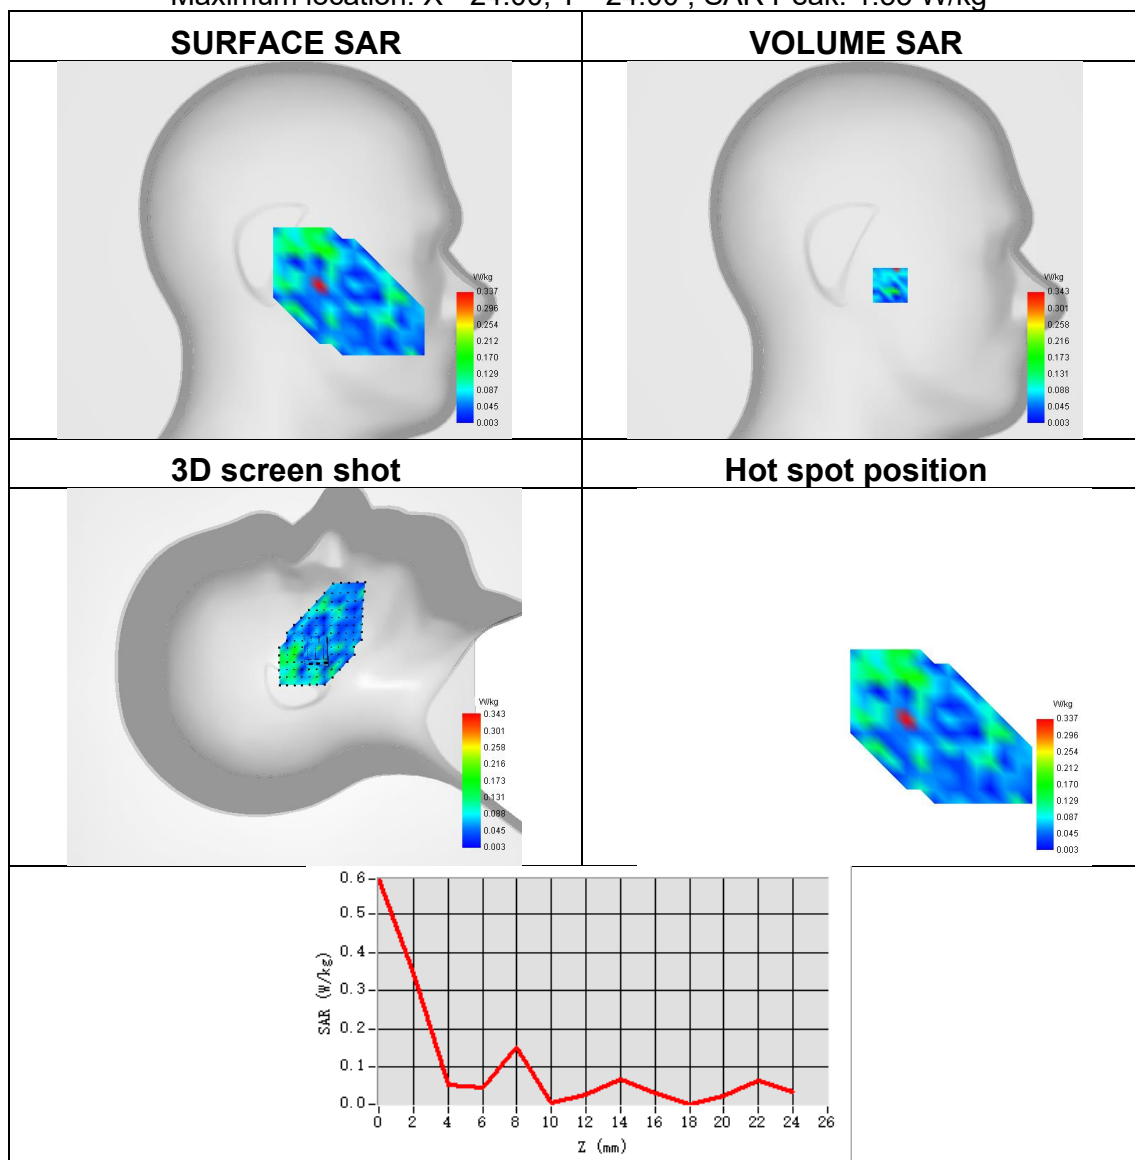




Plot 40:

Test Date	2024-08-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2c ANT 1
Signal	IEEE 802.11a
Frequency	5700
SAR 10g (W/Kg)	0.047
SAR 1g (W/Kg)	0.104
ConvF	1.86
Relative permittivity	35.79
Conductivity (S/m)	5.06

Maximum location: X=0.00, Y=-32.00 ; SAR Peak: 1.37 W/kg

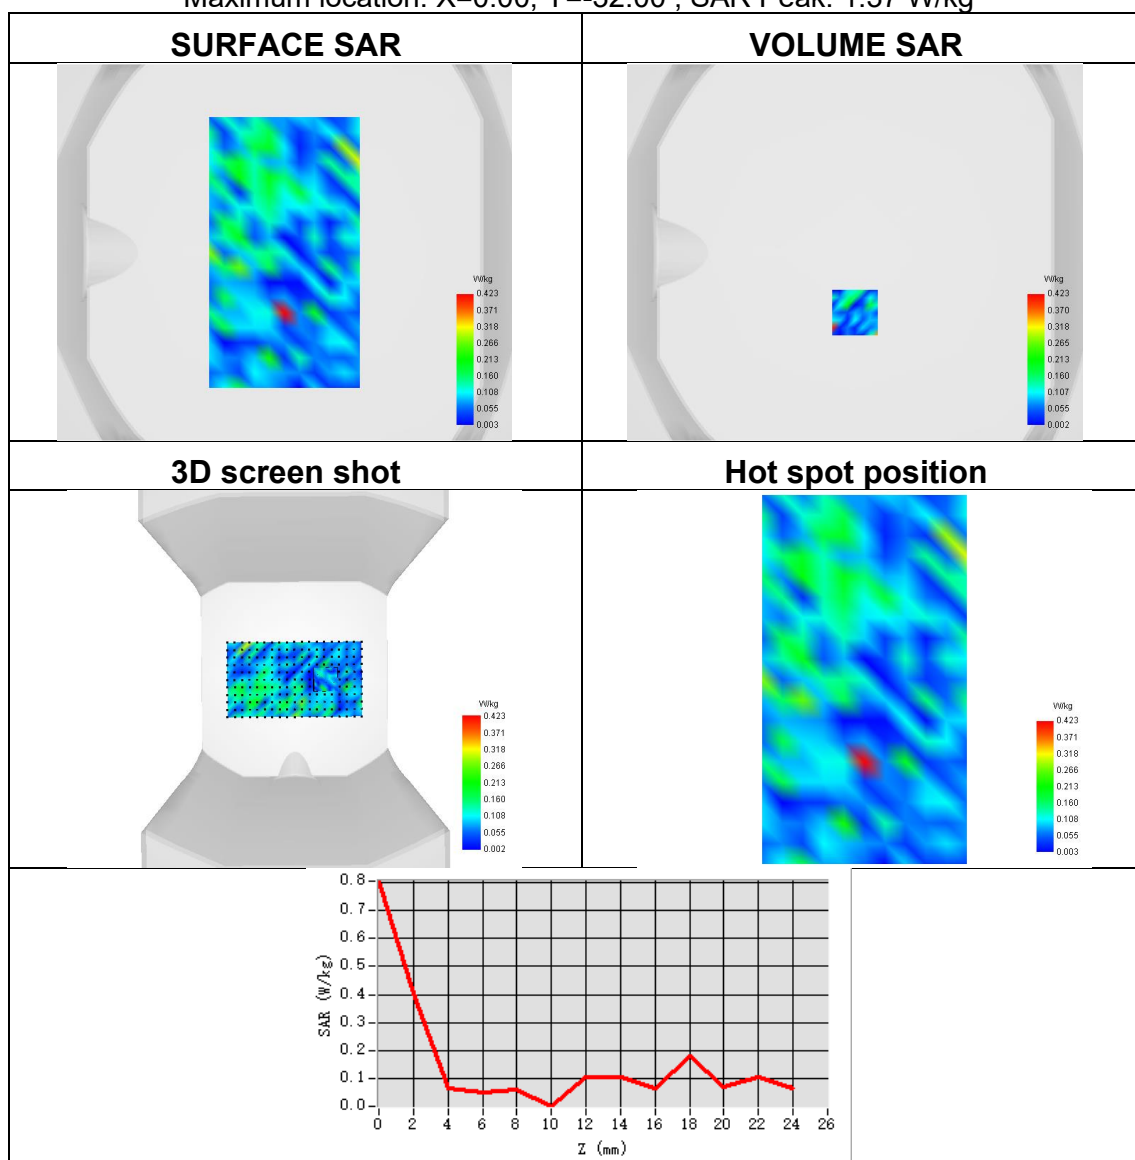




Plot 41:

Test Date	2024-08-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-2c ANT 2
Signal	IEEE 802.11a
Frequency	5500
SAR 10g (W/Kg)	0.057
SAR 1g (W/Kg)	0.102
ConvF	1.86
Relative permittivity	35.79
Conductivity (S/m)	5.06

Maximum location: X=-32.00, Y=-23.00 ; SAR Peak: 1.83 W/kg

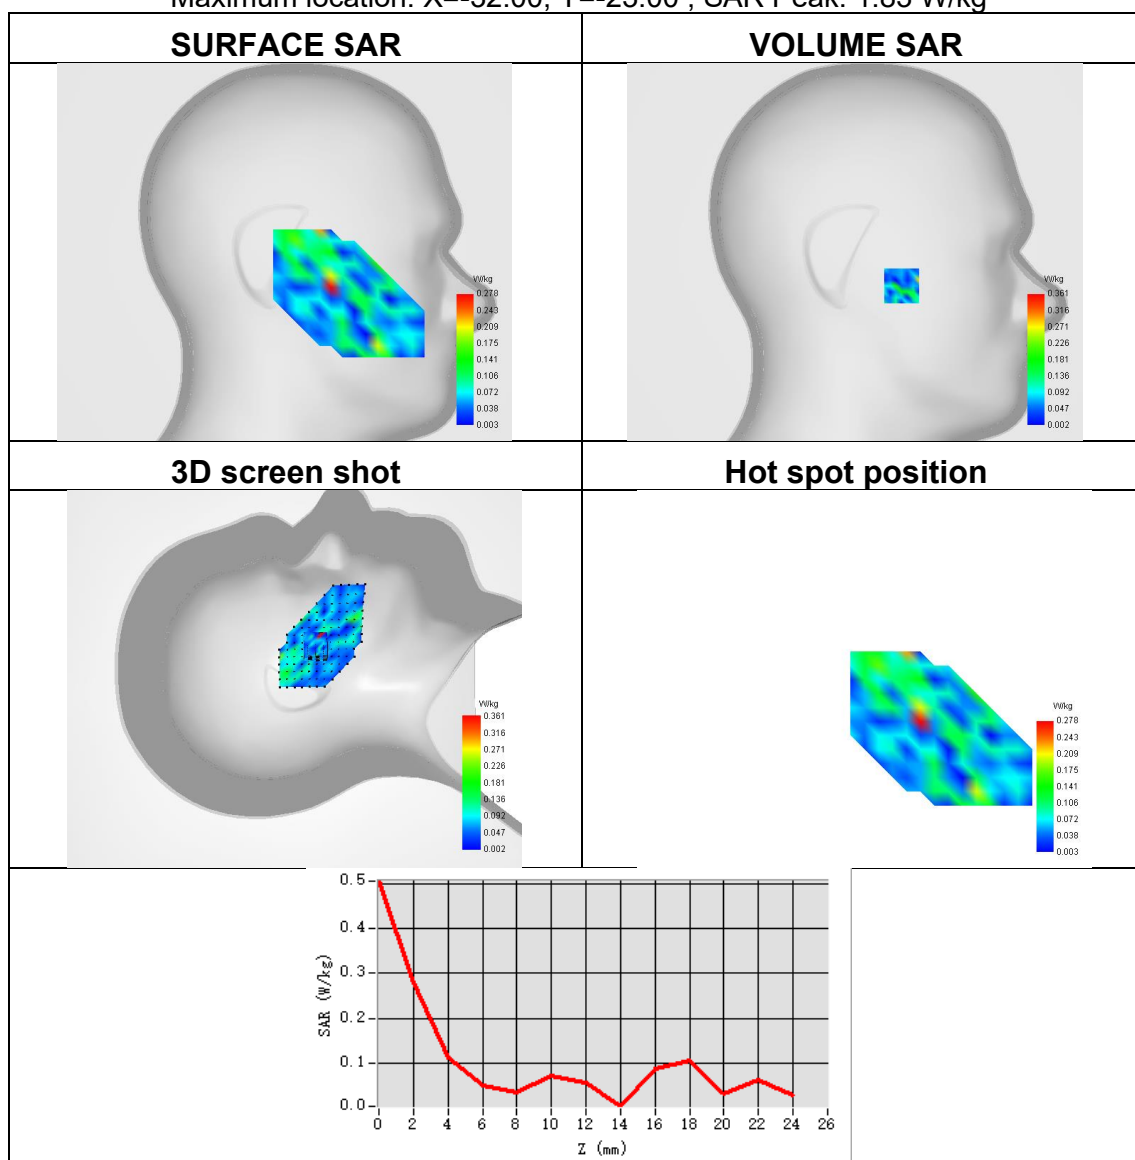




Plot 42:

Test Date	2024-08-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2c ANT 2
Signal	IEEE 802.11a
Frequency	5500
SAR 10g (W/Kg)	0.058
SAR 1g (W/Kg)	0.098
ConvF	1.86
Relative permittivity	35.79
Conductivity (S/m)	5.06

Maximum location: X=0.00, Y=-40.00 ; SAR Peak: 0.52 W/kg

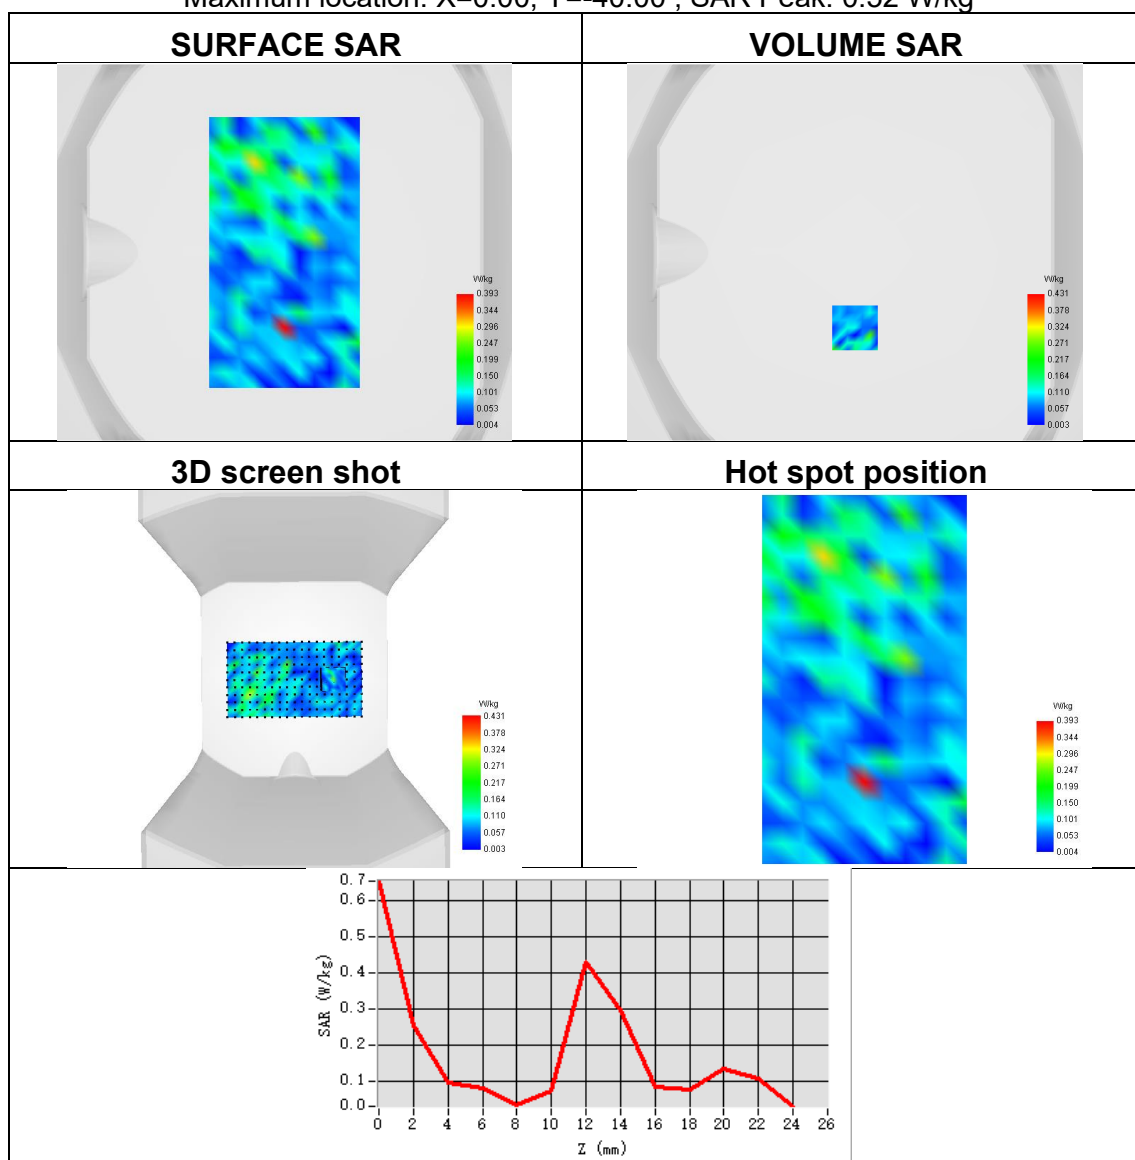




Plot 43:

Test Date	2024-08-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-2c MIMO 1
Signal	IEEE 802.11n
Frequency	5500
SAR 10g (W/Kg)	0.052
SAR 1g (W/Kg)	0.050
ConvF	1.86
Relative permittivity	35.79
Conductivity (S/m)	5.06

Maximum location: X=-8.00, Y=-16.00 ; SAR Peak: 0.90 W/kg

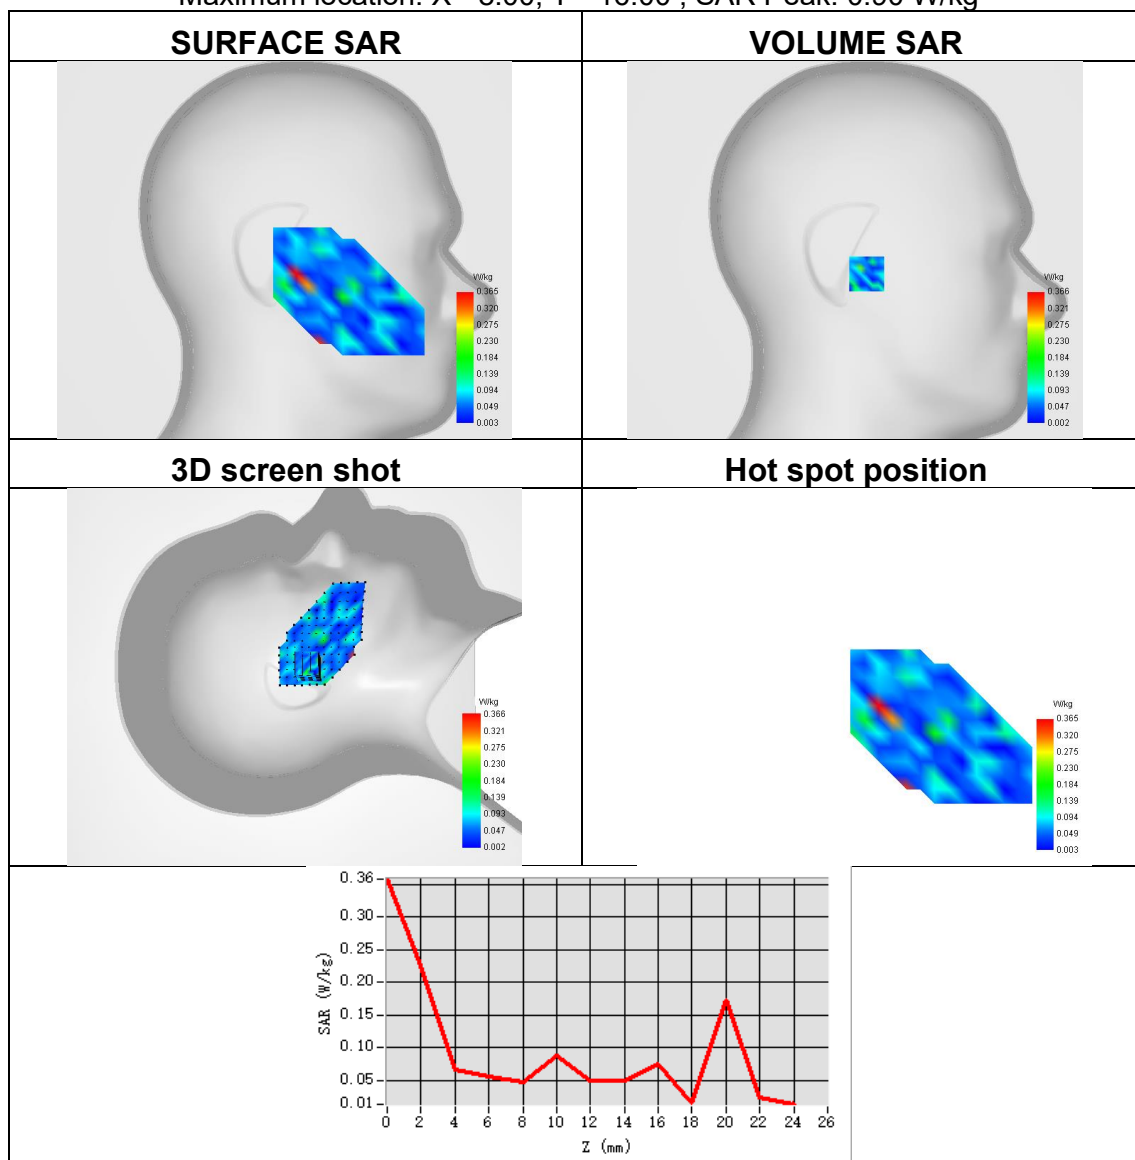




Plot 44:

Test Date	2024-08-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2c MIMO 1
Signal	IEEE 802.11n
Frequency	5500
SAR 10g (W/Kg)	0.053
SAR 1g (W/Kg)	0.100
ConvF	1.86
Relative permittivity	35.79
Conductivity (S/m)	5.06

Maximum location: X=1.00, Y=-24.00 ; SAR Peak: 0.65 W/kg

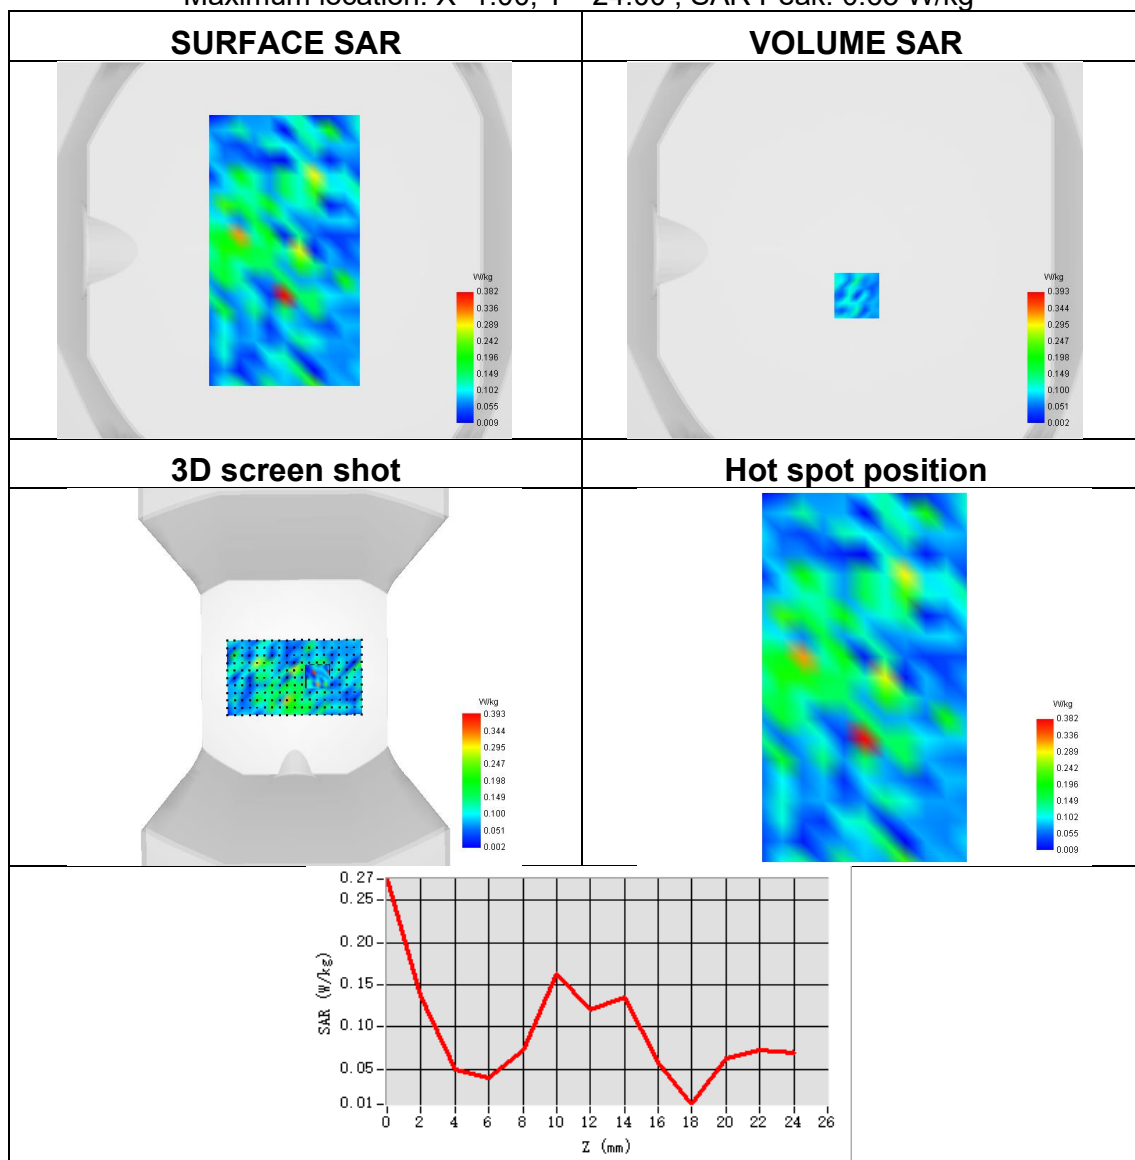




Plot 45:

Test Date	2024-08-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-2c MIMO 2
Signal	IEEE 802.11n
Frequency	5500
SAR 10g (W/Kg)	0.048
SAR 1g (W/Kg)	0.045
ConvF	1.86
Relative permittivity	35.79
Conductivity (S/m)	5.06

Maximum location: X=-8.00, Y=-16.00 ; SAR Peak: 1.34 W/kg

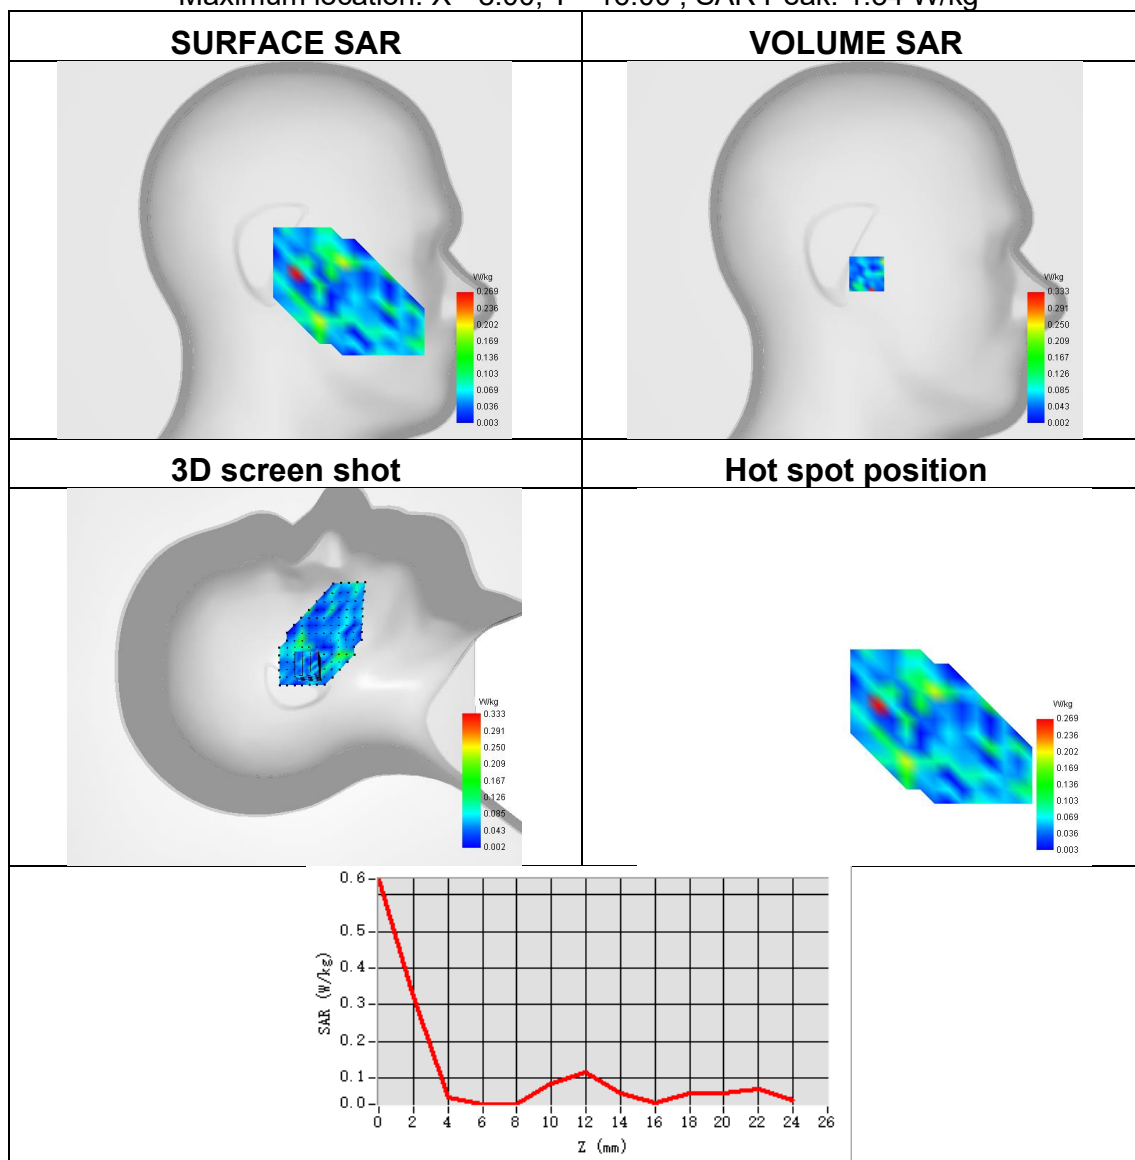




Plot 46:

Test Date	2024-08-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2c MIMO 2
Signal	IEEE 802.11n
Frequency	5500
SAR 10g (W/Kg)	0.067
SAR 1g (W/Kg)	0.137
ConvF	1.86
Relative permittivity	35.79
Conductivity (S/m)	5.06

Maximum location: X=16.00, Y=-16.00 ; SAR Peak: 1.15 W/kg

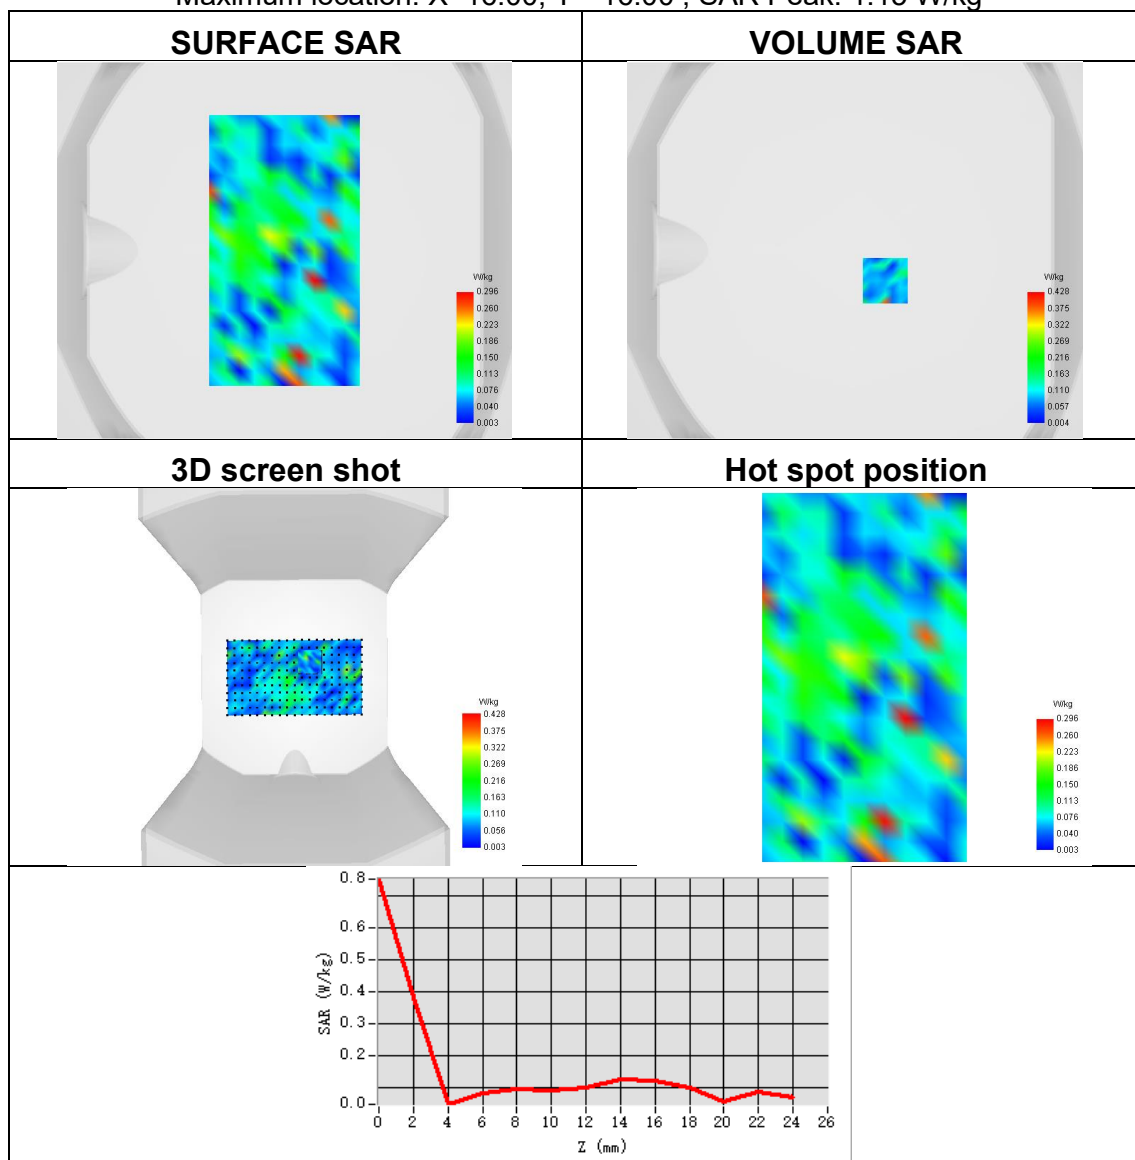




Plot 47:

Test Date	2024-08-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-3 ANT 1
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.079
SAR 1g (W/Kg)	0.172
ConvF	1.71
Relative permittivity	36.08
Conductivity (S/m)	5.29

Maximum location: X=-40.00, Y=-16.00 ; SAR Peak: 1.23 W/kg

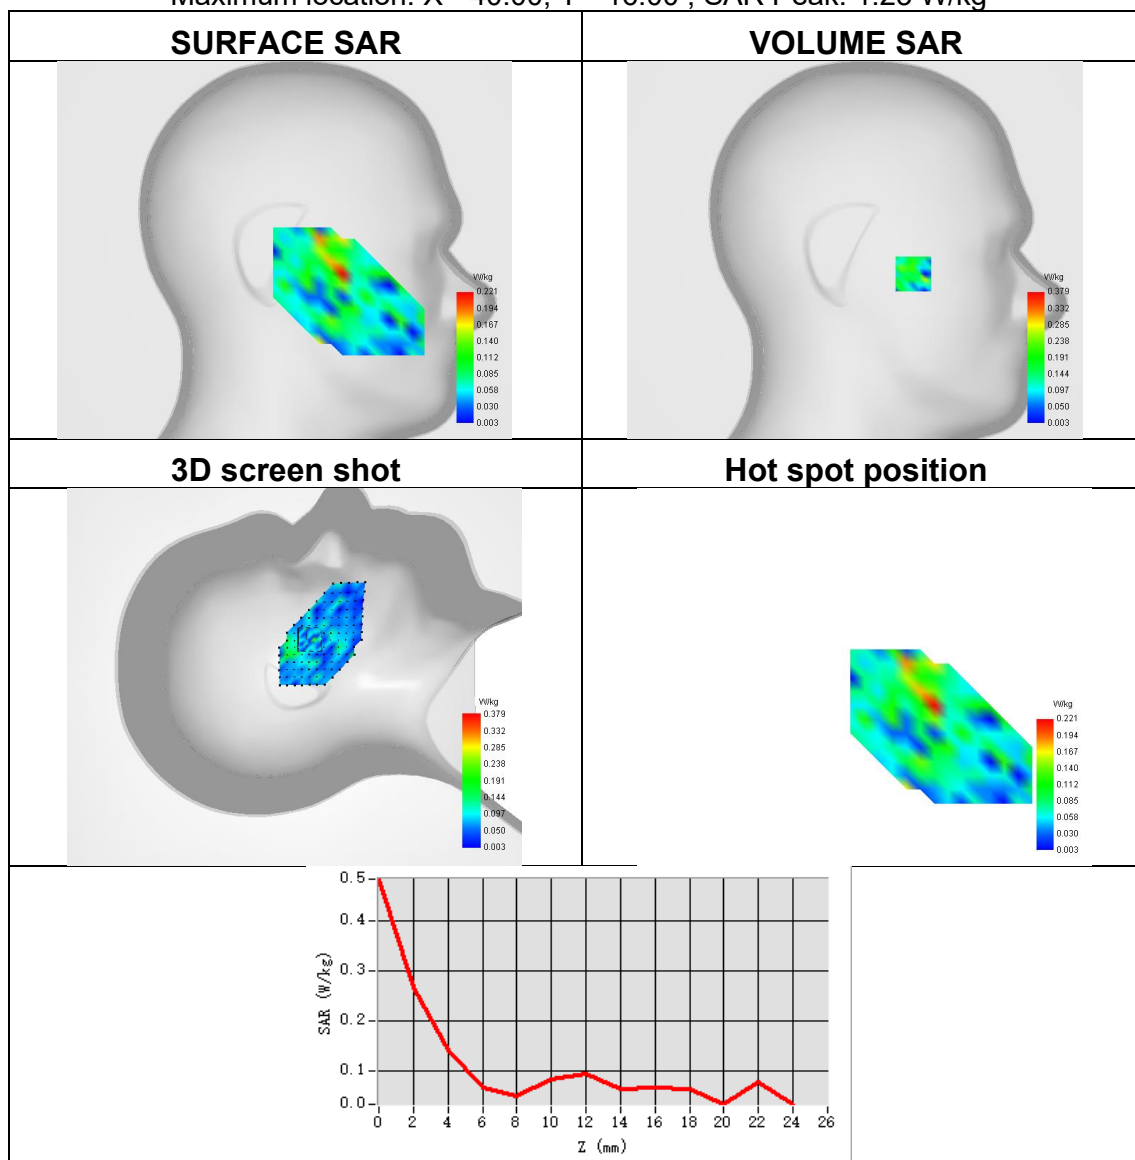




Plot 48:

Test Date	2024-08-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3 ANT 1
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.062
SAR 1g (W/Kg)	0.133
ConvF	1.71
Relative permittivity	36.08
Conductivity (S/m)	5.29

Maximum location: X=0.00, Y=-16.00 ; SAR Peak: 0.88 W/kg

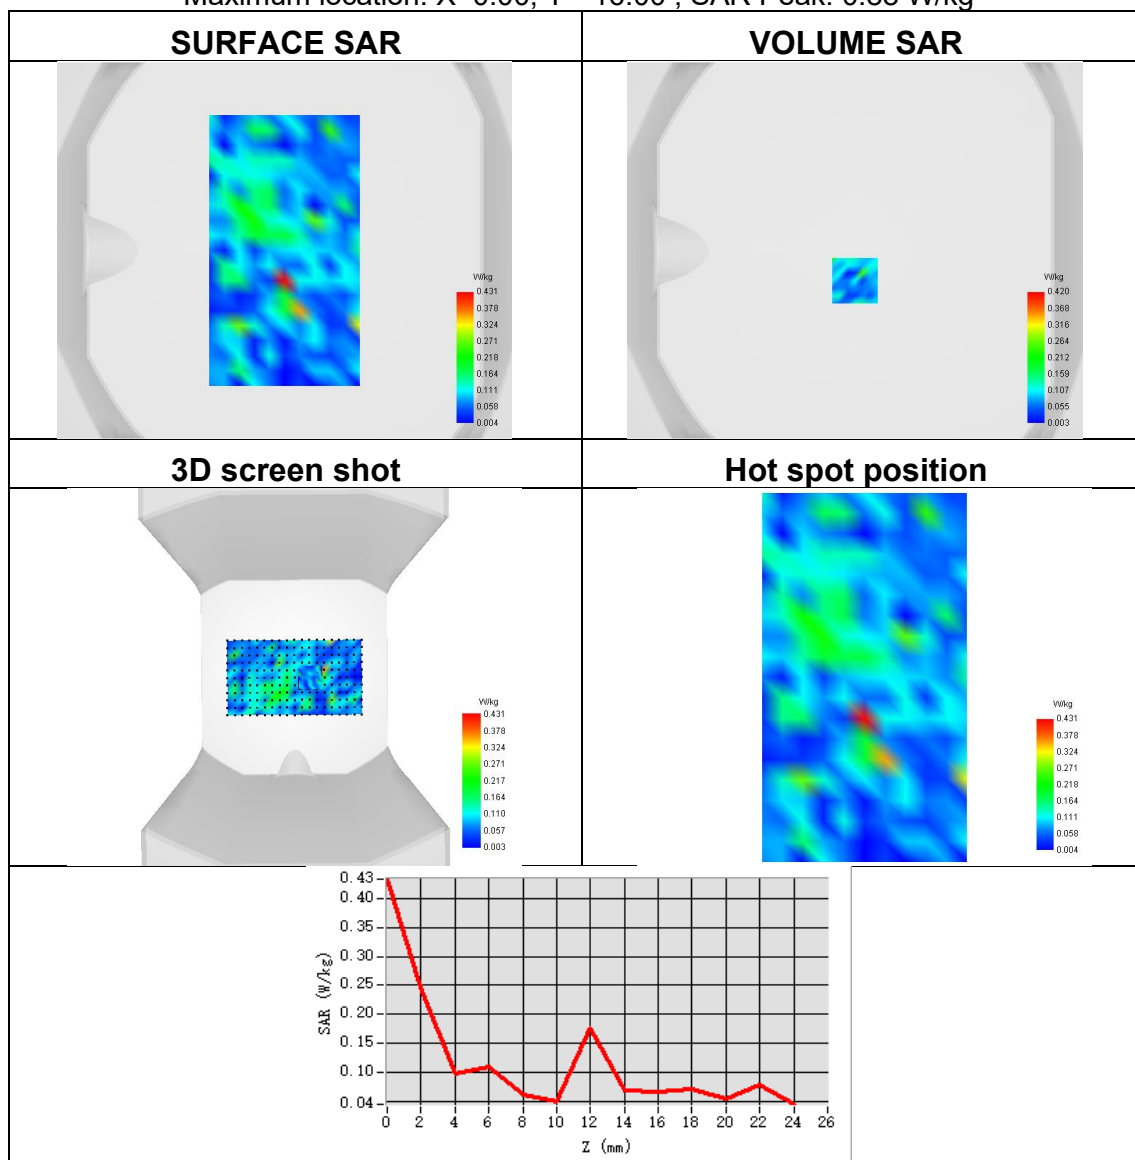




Plot 49:

Test Date	2024-08-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-3 ANT 2
Signal	IEEE 802.11a
Frequency	5825
SAR 10g (W/Kg)	0.083
SAR 1g (W/Kg)	0.167
ConvF	1.71
Relative permittivity	36.08
Conductivity (S/m)	5.29

Maximum location: X=-40.00, Y=-1.00 ; SAR Peak: 1.64 W/kg

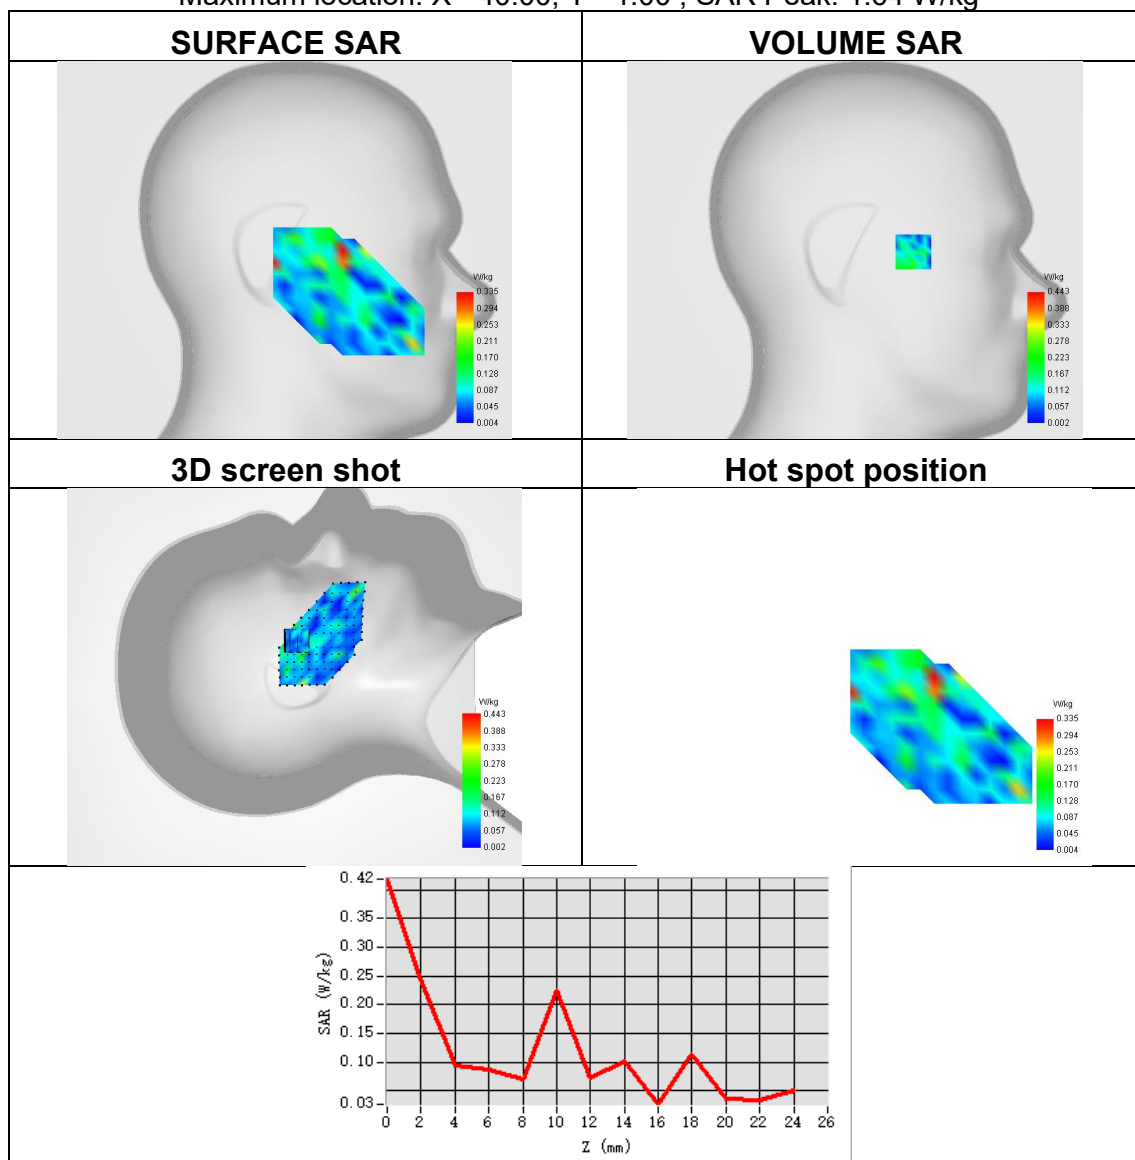




Plot 50:

Test Date	2024-08-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3 ANT 2
Signal	IEEE 802.11a
Frequency	5825
SAR 10g (W/Kg)	0.070
SAR 1g (W/Kg)	0.173
ConvF	1.71
Relative permittivity	36.08
Conductivity (S/m)	5.29

Maximum location: X=0.00, Y=48.00 ; SAR Peak: 0.94 W/kg

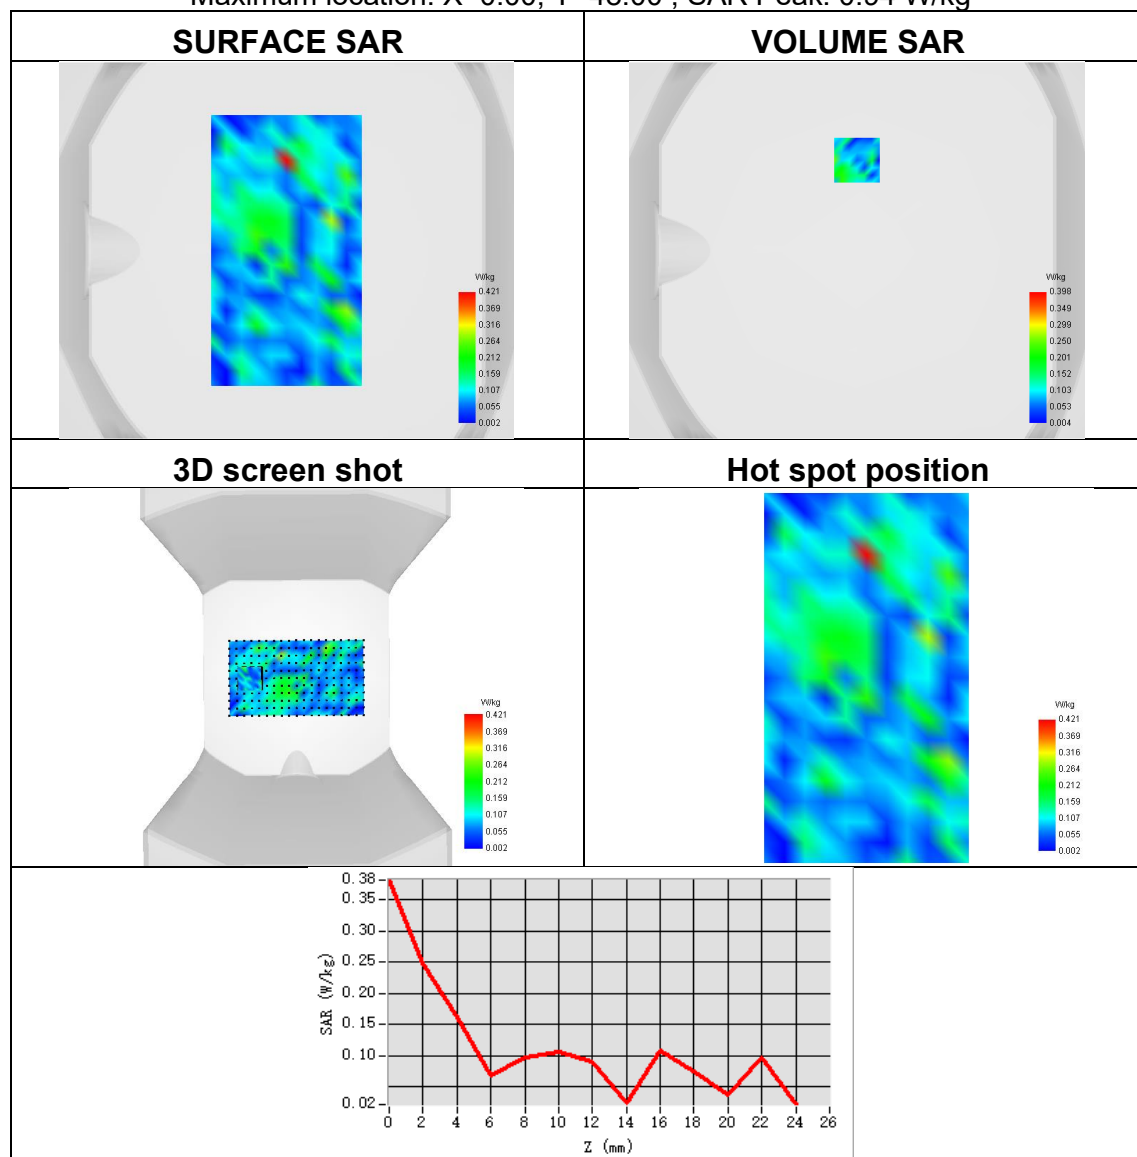




Plot 51:

Test Date	2024-08-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-3 MIMO 1
Signal	IEEE 802.11ax
Frequency	5745
SAR 10g (W/Kg)	0.047
SAR 1g (W/Kg)	0.130
ConvF	1.71
Relative permittivity	36.08
Conductivity (S/m)	5.29

Maximum location: X=-56.00, Y=-32.00 ; SAR Peak: 0.92 W/kg

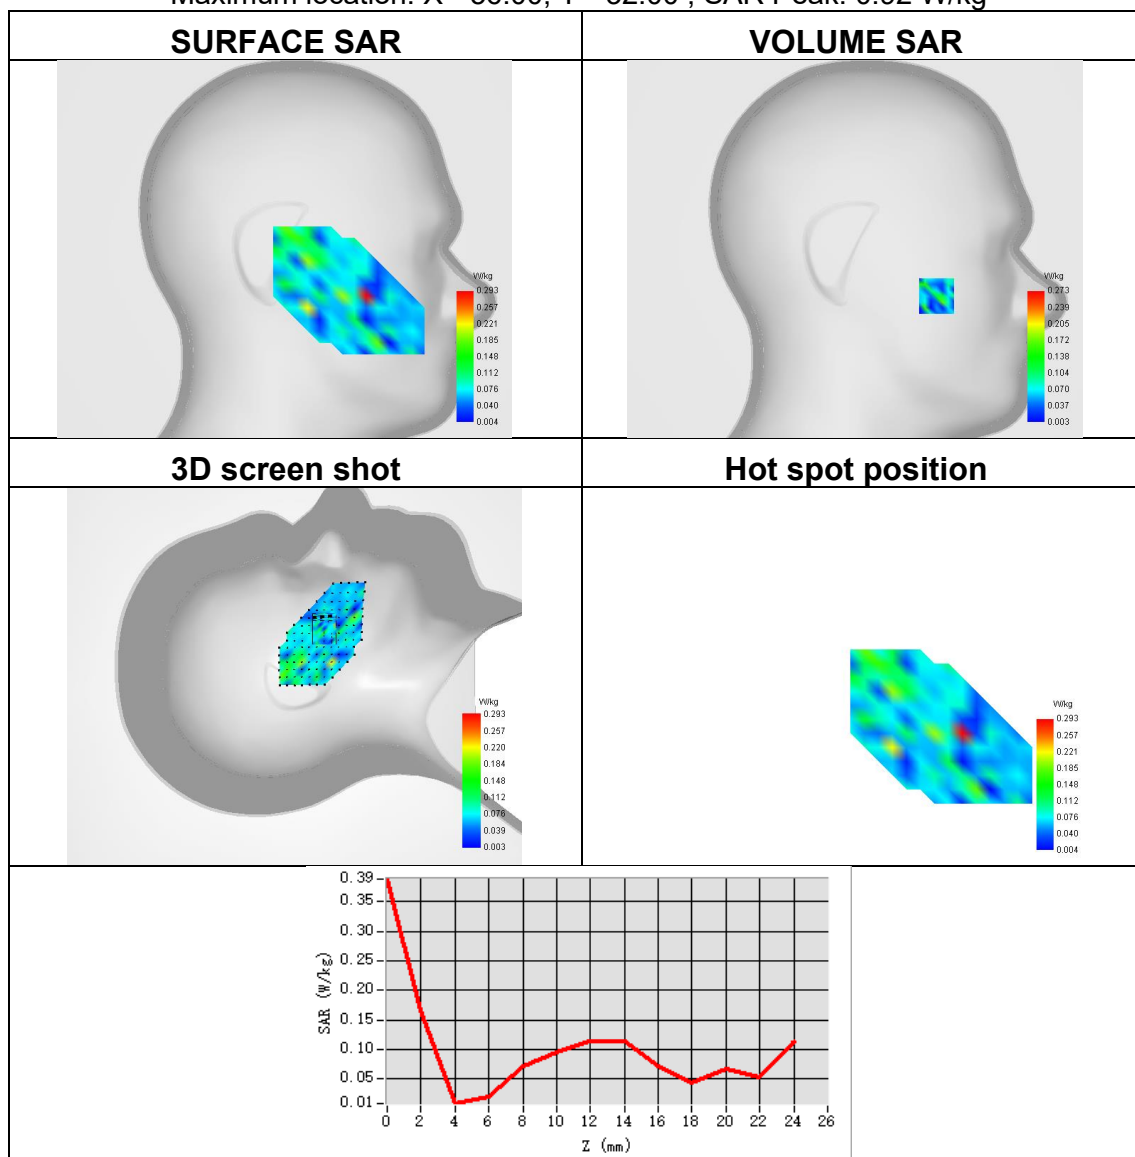




Plot 52:

Test Date	2024-08-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3 MIMO 1
Signal	IEEE 802.11ax
Frequency	5745
SAR 10g (W/Kg)	0.075
SAR 1g (W/Kg)	0.139
ConvF	1.71
Relative permittivity	36.08
Conductivity (S/m)	5.29

Maximum location: X=-32.00, Y=40.00 ; SAR Peak: 0.95 W/kg

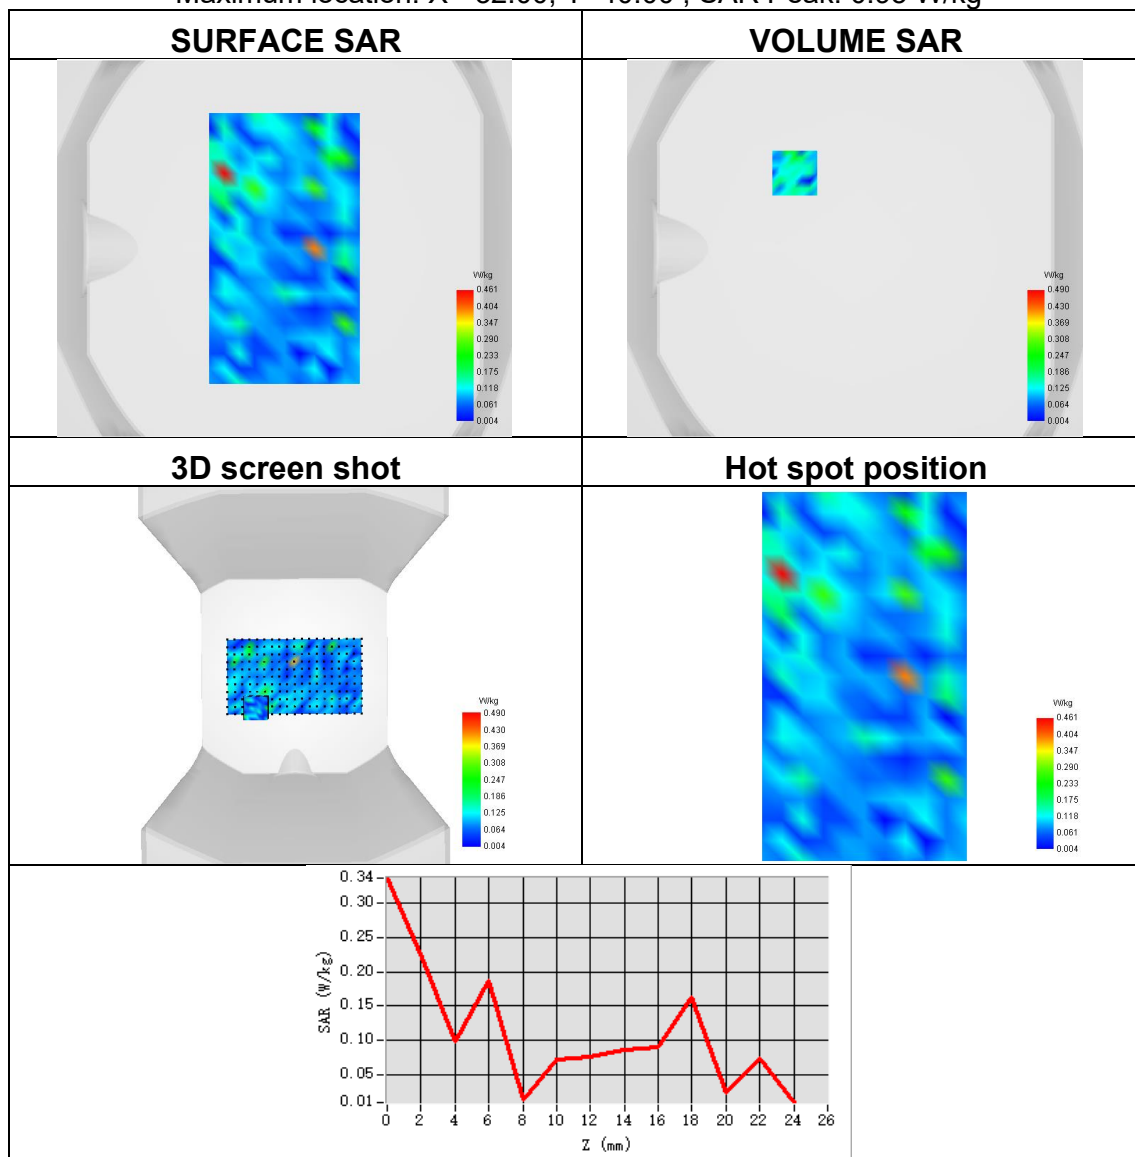




Plot 53:

Test Date	2024-08-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-3 MIMO 2
Signal	IEEE 802.11ax
Frequency	5745
SAR 10g (W/Kg)	0.065
SAR 1g (W/Kg)	0.145
ConvF	1.71
Relative permittivity	36.08
Conductivity (S/m)	5.29

Maximum location: X=-25.00, Y=-48.00 ; SAR Peak: 1.36 W/kg

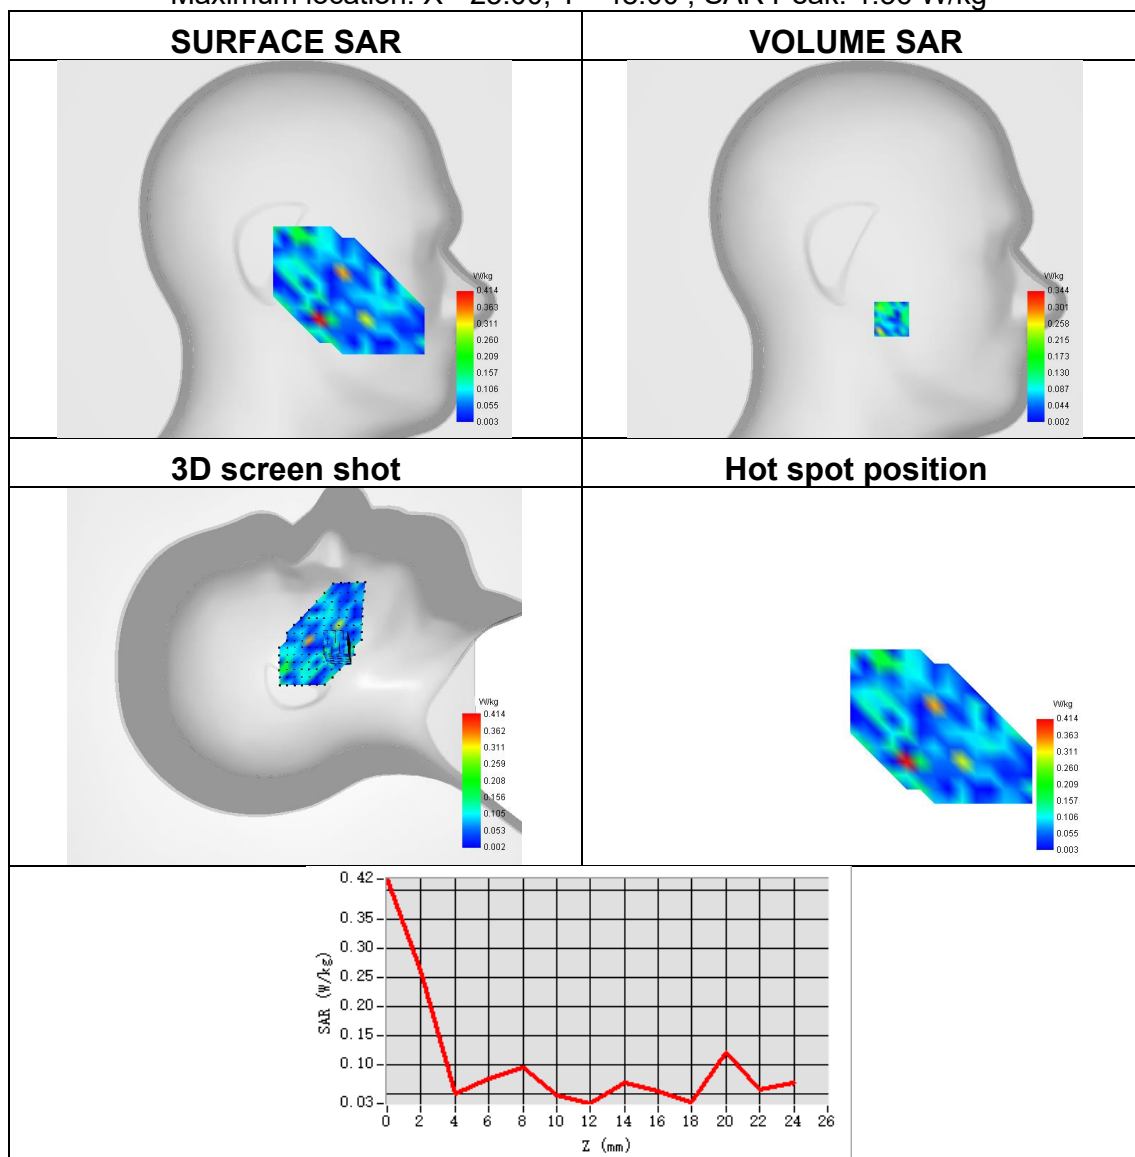




Plot 54:

Test Date	2024-08-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3 MIMO 2
Signal	IEEE 802.11ax
Frequency	5745
SAR 10g (W/Kg)	0.068
SAR 1g (W/Kg)	0.119
ConvF	1.71
Relative permittivity	36.08
Conductivity (S/m)	5.29

Maximum location: X=-16.00, Y=16.00 ; SAR Peak: 1.51 W/kg

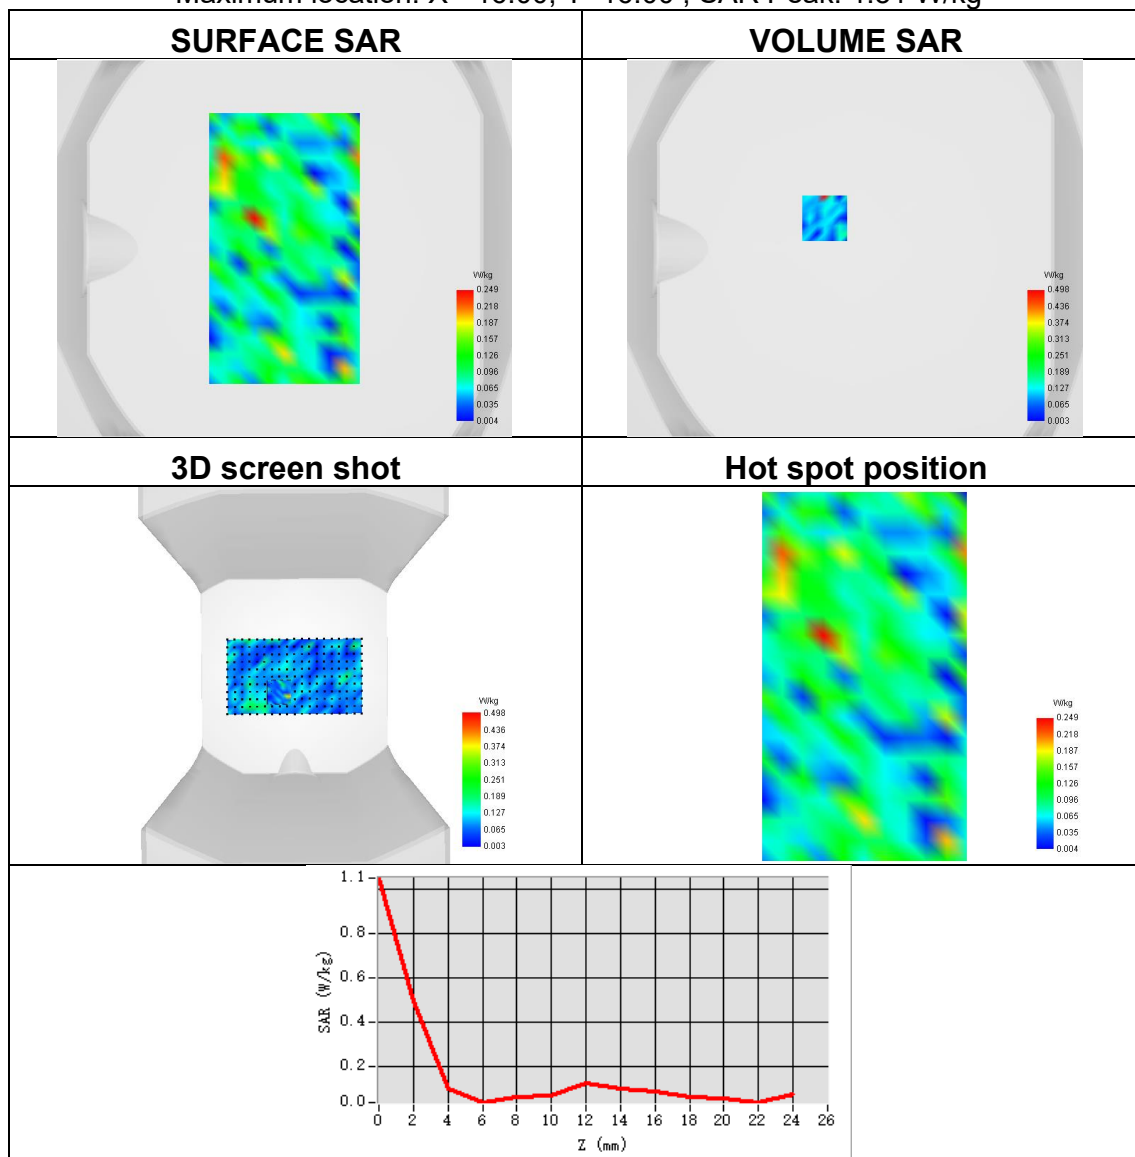




Plot 55:

Test Date	2024-08-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 2
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.050
SAR 1g (W/Kg)	0.114
ConvF	2.24
Relative permittivity	40.78
Conductivity (S/m)	1.34

Maximum location: X=-56.00, Y=-41.00 ; SAR Peak: 0.26 W/kg

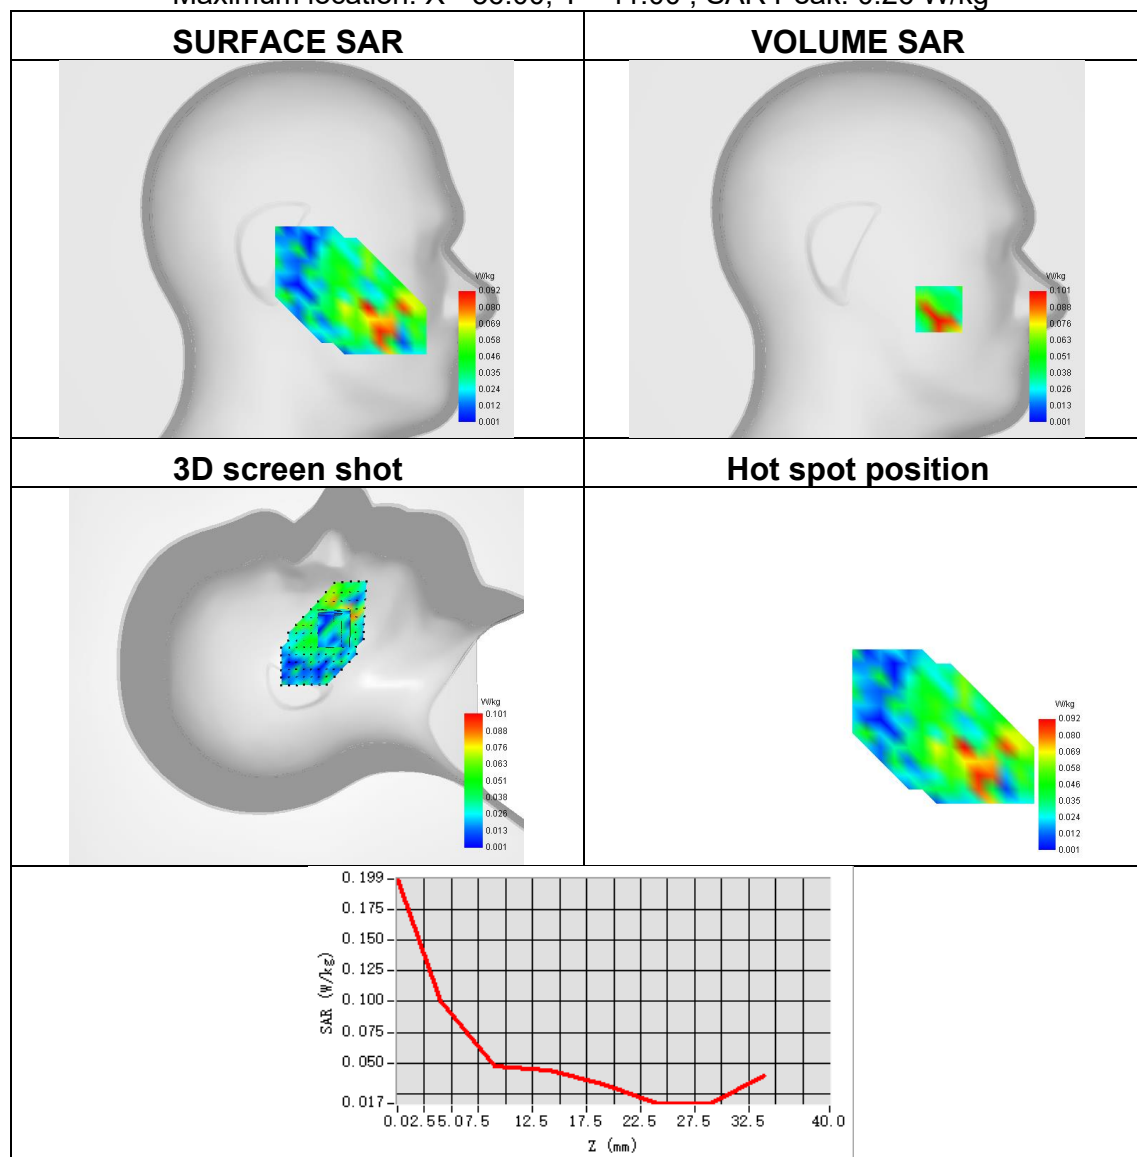




Plot 56:

Test Date	2024-08-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.358
SAR 1g (W/Kg)	0.656
ConvF	2.24
Relative permittivity	40.78
Conductivity (S/m)	1.34

Maximum location: X=7.00, Y=-23.00 ; SAR Peak: 1.06 W/kg

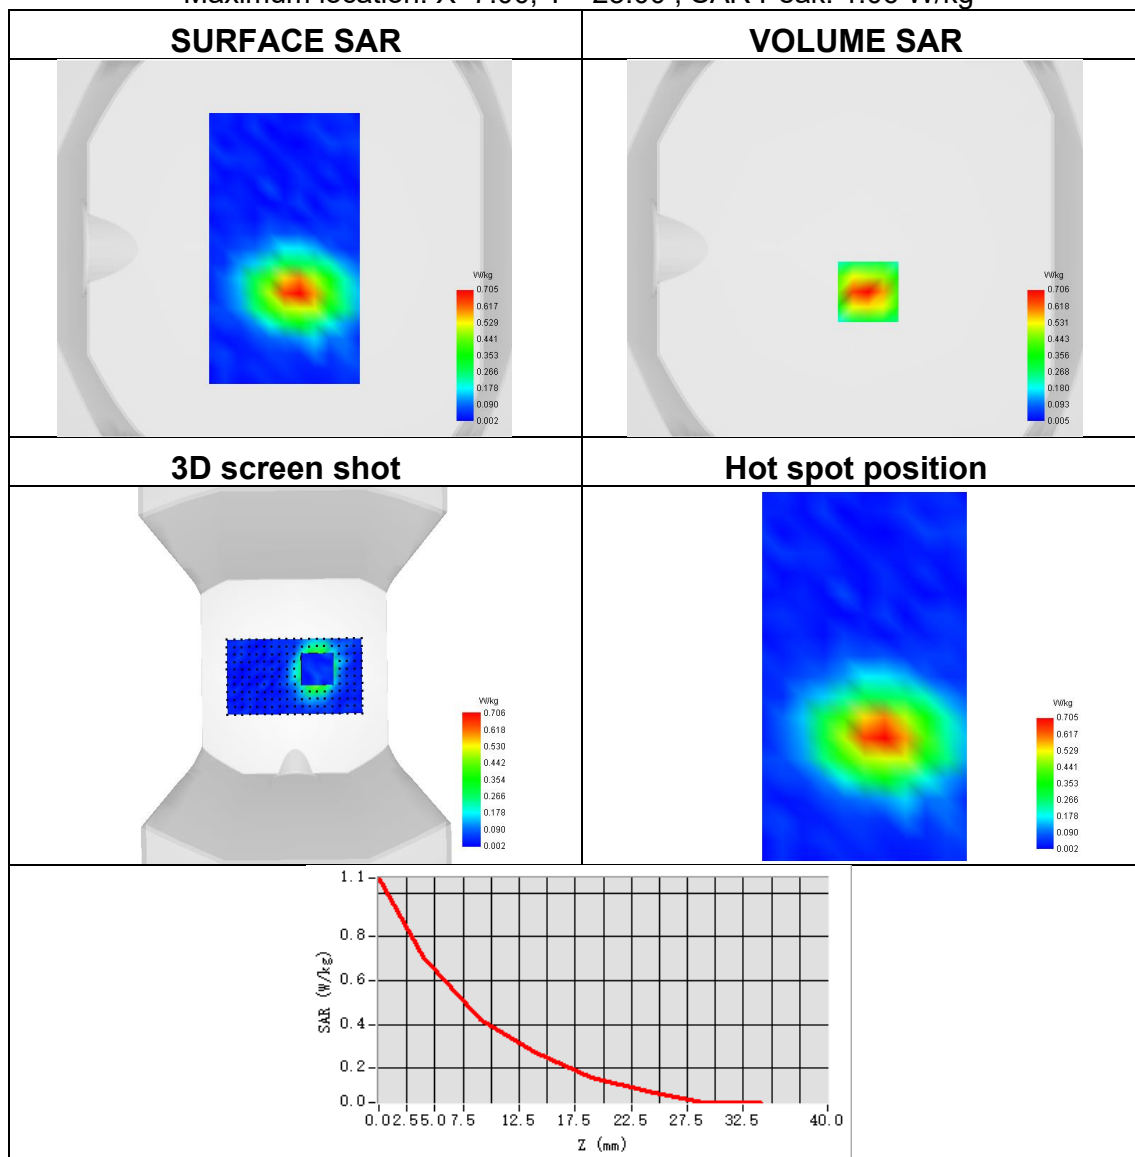




Plot 57:

Test Date	2024-08-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 4
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.042
SAR 1g (W/Kg)	0.102
ConvF	1.91
Relative permittivity	40.52
Conductivity (S/m)	1.37

Maximum location: X=-48.00, Y=-40.00 ; SAR Peak: 0.26 W/kg

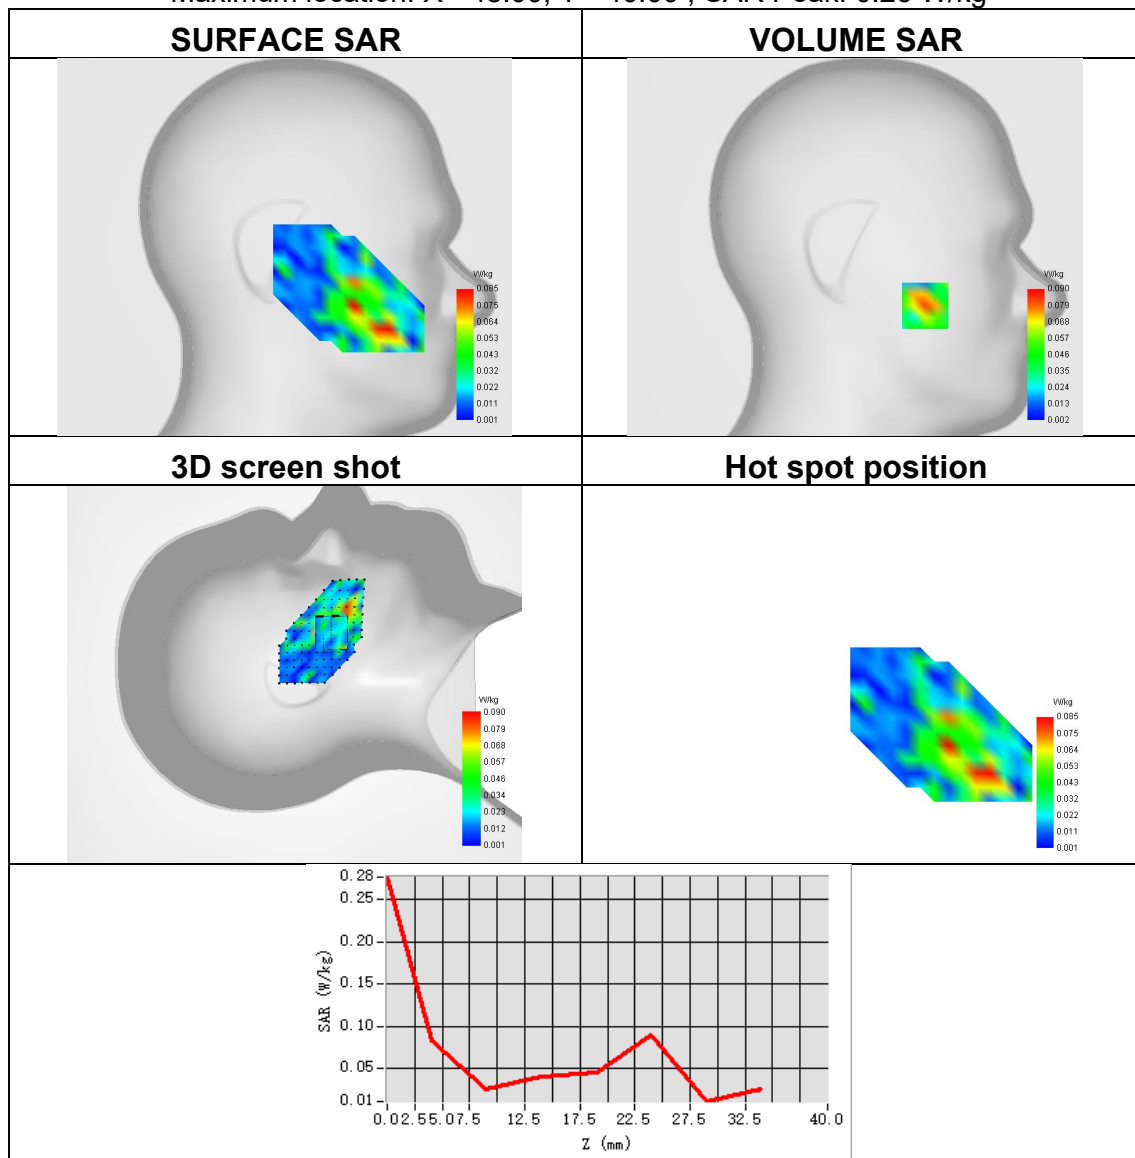




Plot 58:

Test Date	2024-08-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.236
SAR 1g (W/Kg)	0.429
ConvF	1.91
Relative permittivity	40.52
Conductivity (S/m)	1.37

Maximum location: X=6.00, Y=-22.00 ; SAR Peak: 0.73 W/kg

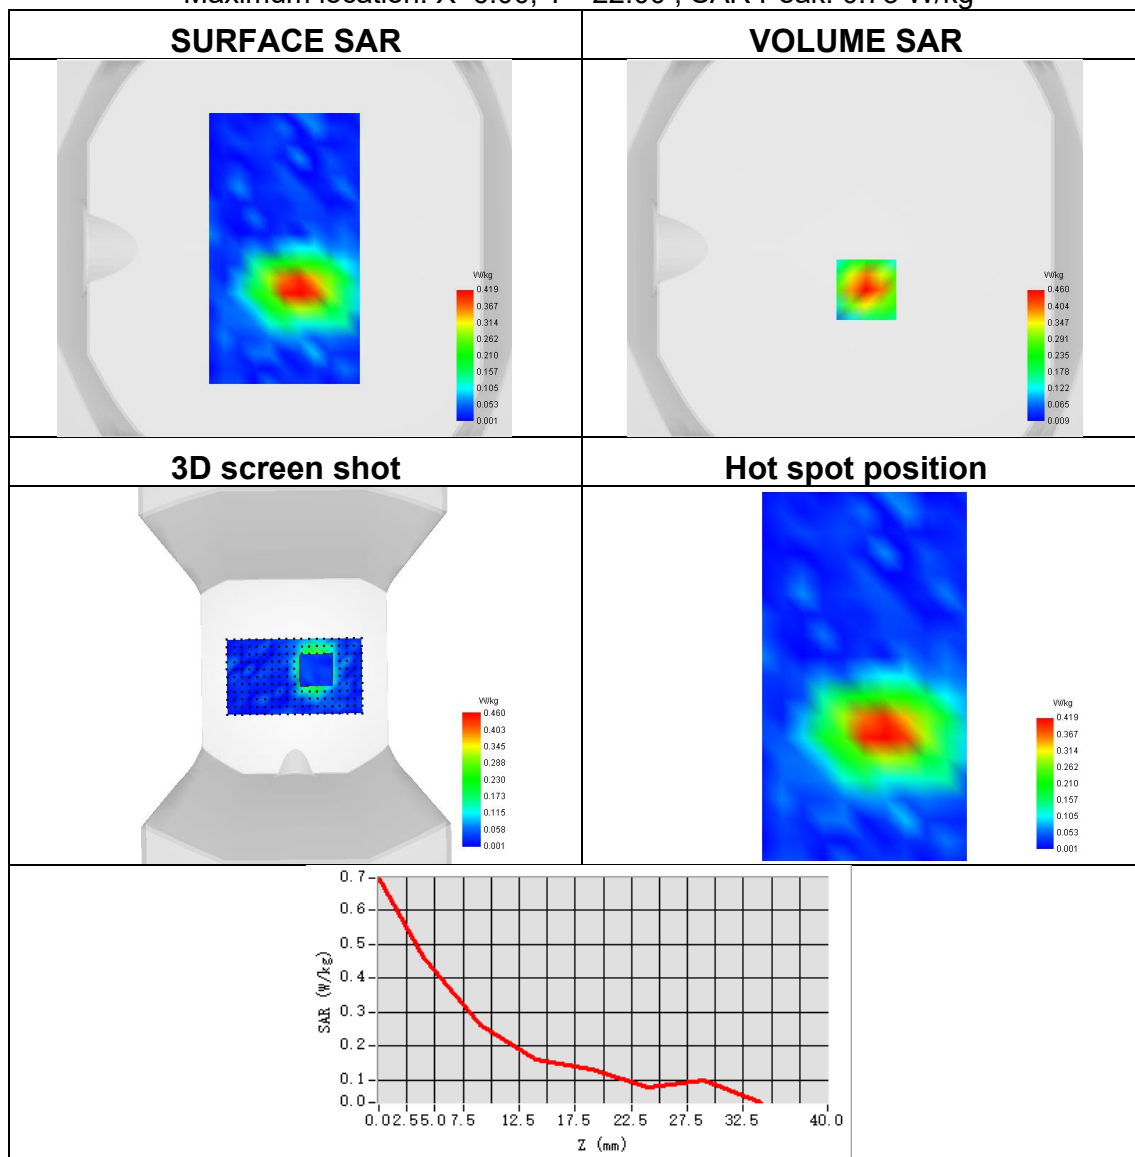




Plot 59:

Test Date	2024-08-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.039
SAR 1g (W/Kg)	0.090
ConvF	1.70
Relative permittivity	41.91
Conductivity (S/m)	0.92

Maximum location: X=-10.00, Y=-15.00 ; SAR Peak: 0.23 W/kg

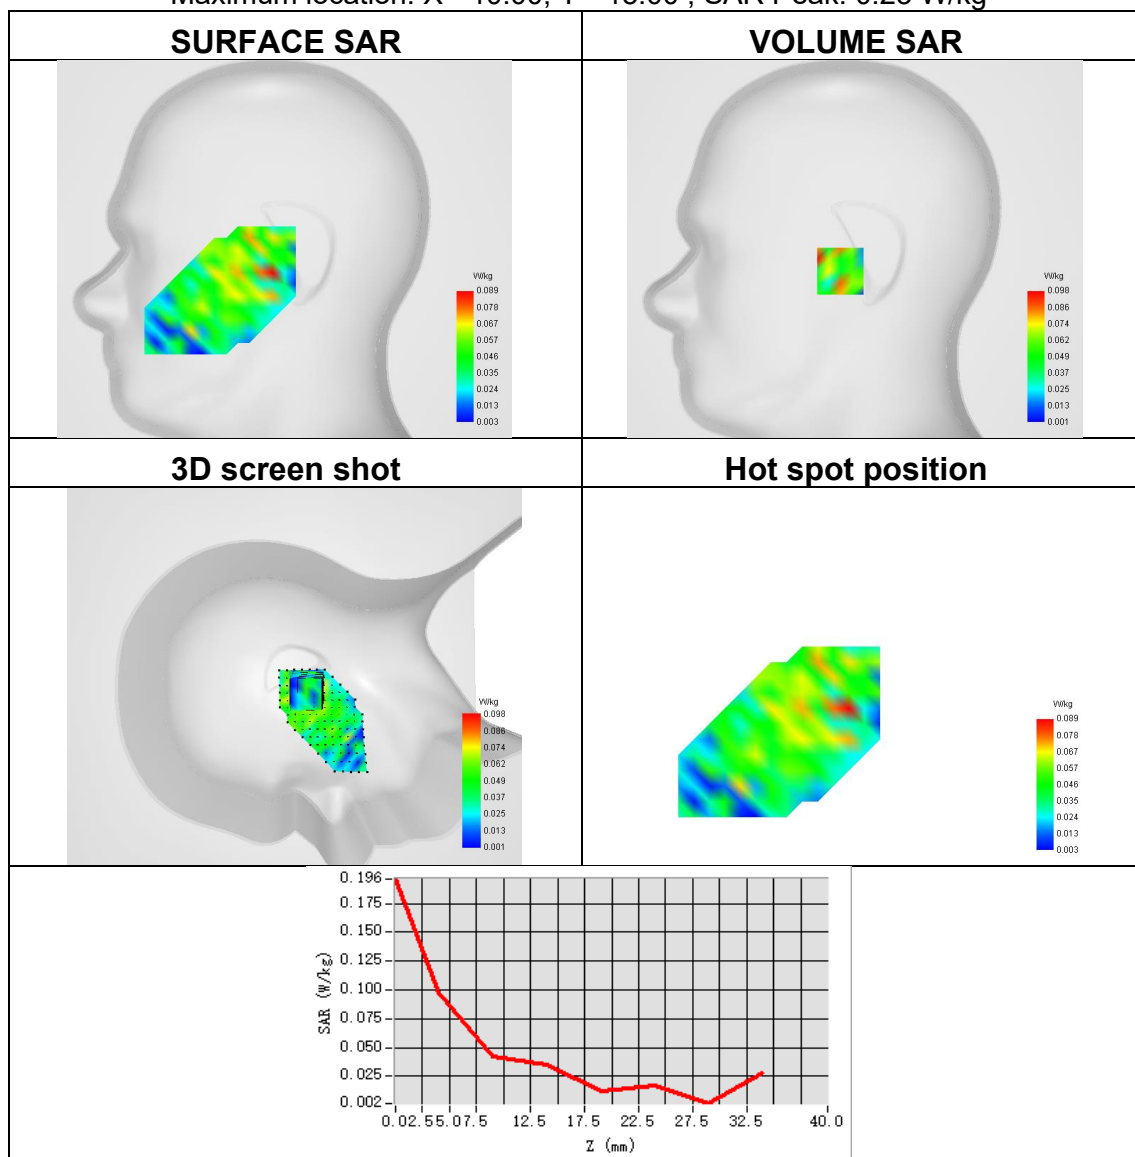




Plot 60:

Test Date	2024-08-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.071
SAR 1g (W/Kg)	0.141
ConvF	1.70
Relative permittivity	41.91
Conductivity (S/m)	0.92

Maximum location: X=6.00, Y=18.00 ; SAR Peak: 0.23 W/kg

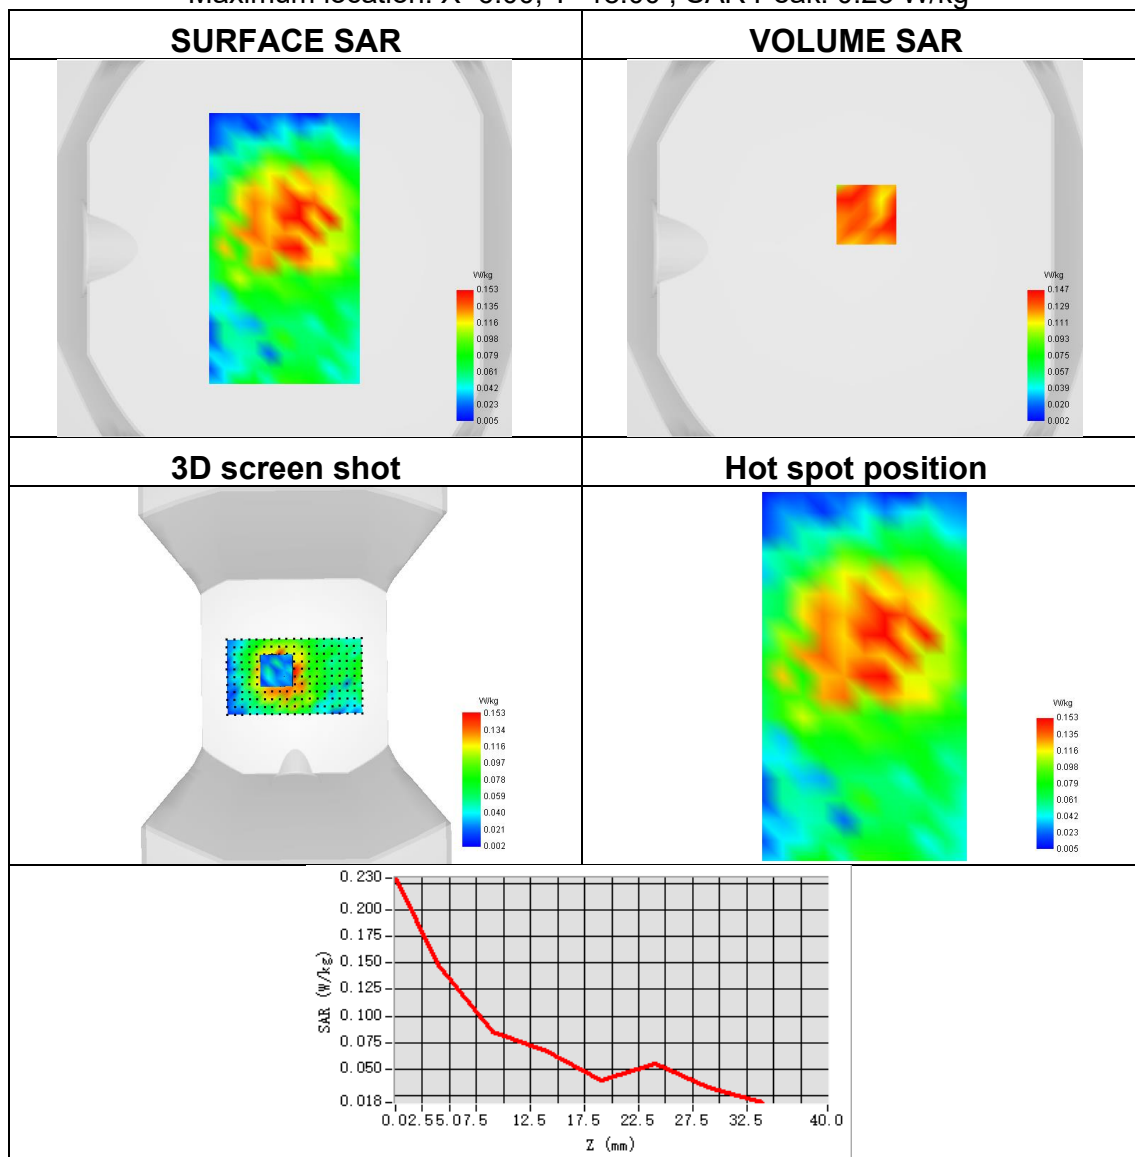




Plot 61:

Test Date	2024-08-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.057
SAR 1g (W/Kg)	0.116
ConvF	2.35
Relative permittivity	39.47
Conductivity (S/m)	1.99

Maximum location: X=-42.00, Y=-48.00 ; SAR Peak: 0.29 W/kg

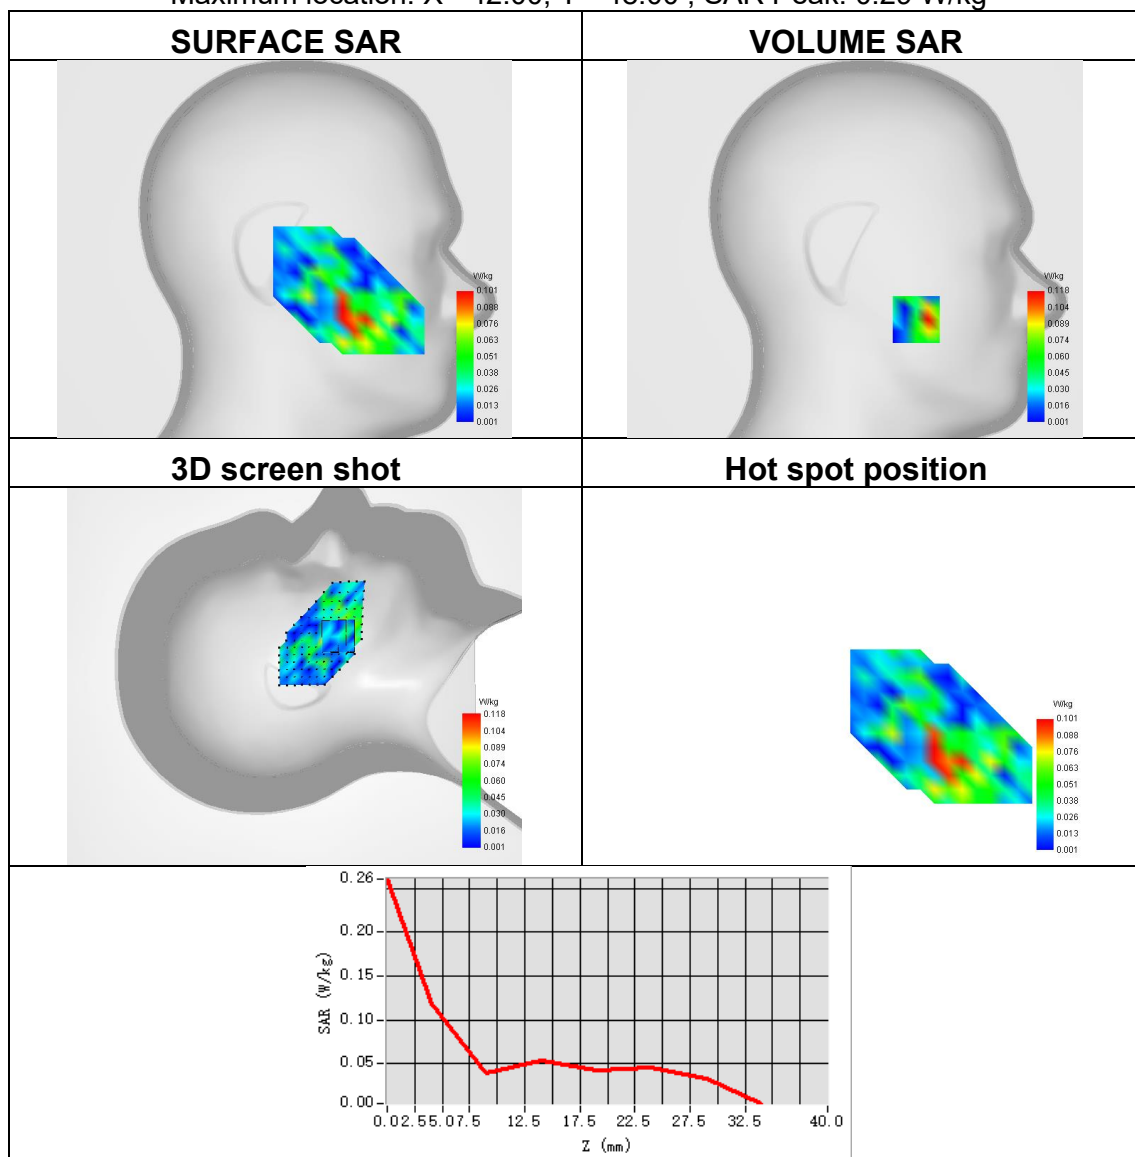




Plot 62:

Test Date	2024-08-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.224
SAR 1g (W/Kg)	0.477
ConvF	2.35
Relative permittivity	39.47
Conductivity (S/m)	1.99

Maximum location: X=2.00, Y=-36.00 ; SAR Peak: 0.87 W/kg

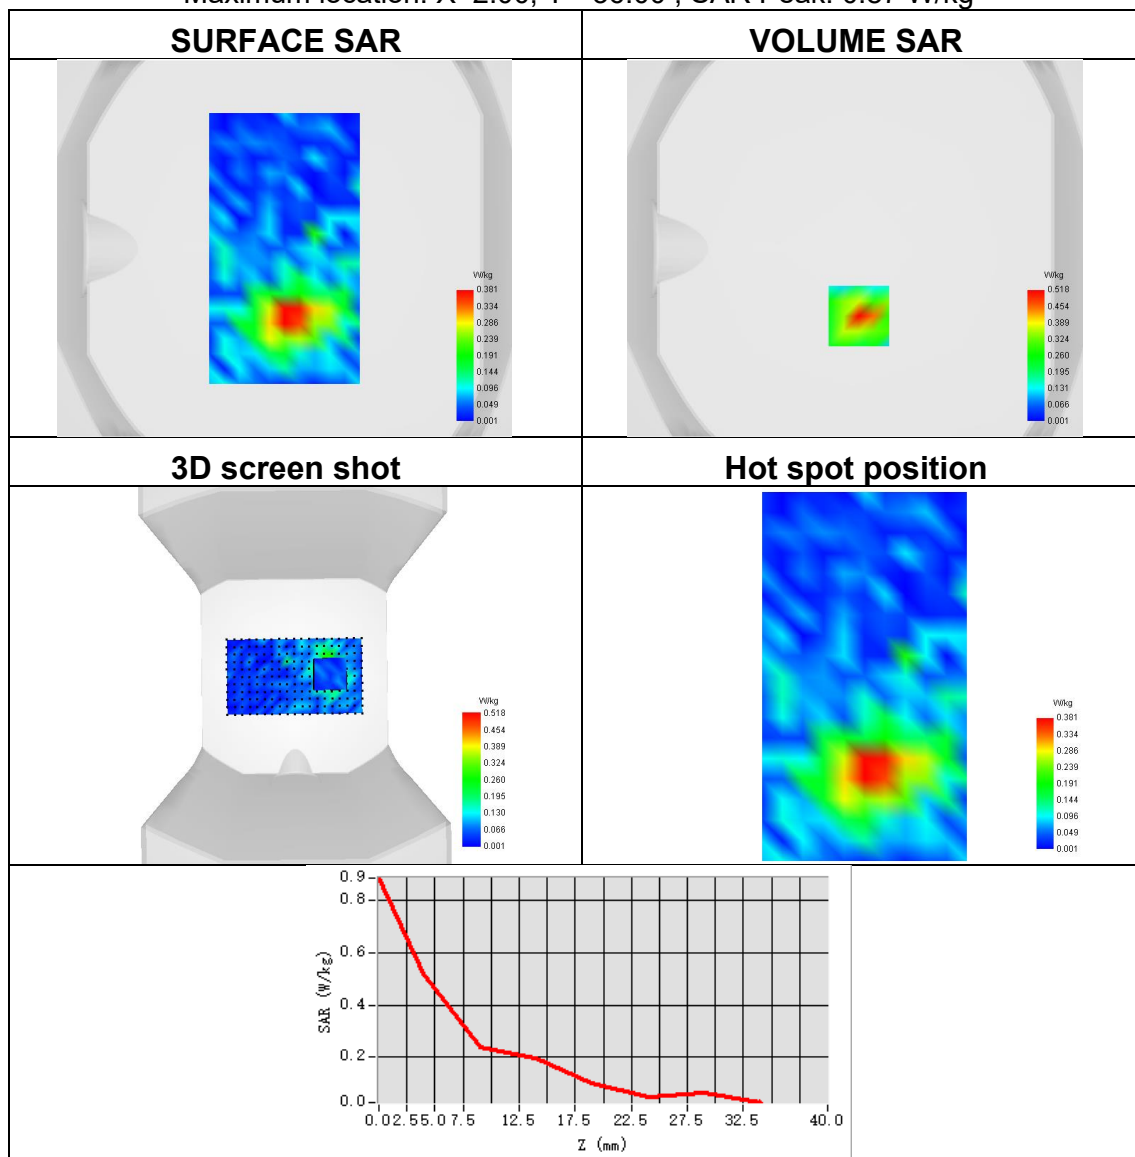




Plot 63:

Test Date	2024-08-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 12
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.051
SAR 1g (W/Kg)	0.109
ConvF	1.68
Relative permittivity	42.53
Conductivity (S/m)	0.86

Maximum location: X=-40.00, Y=-32.00 ; SAR Peak: 0.23 W/kg

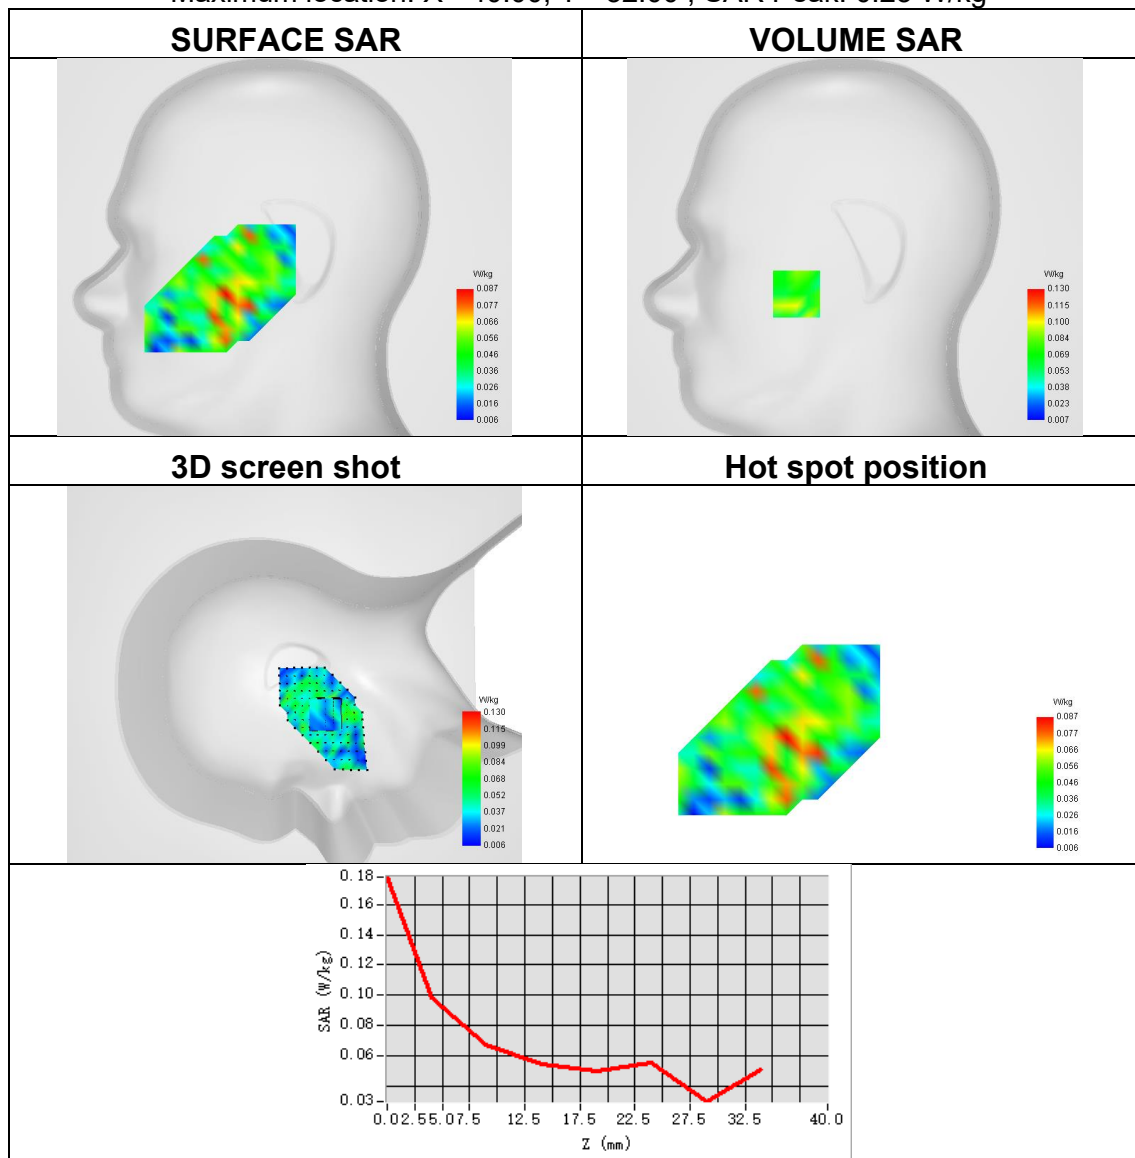




Plot 64:

Test Date	2024-08-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 12
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.127
SAR 1g (W/Kg)	0.204
ConvF	1.68
Relative permittivity	42.53
Conductivity (S/m)	0.86

Maximum location: X=8.00, Y=8.00 ; SAR Peak: 0.30 W/kg

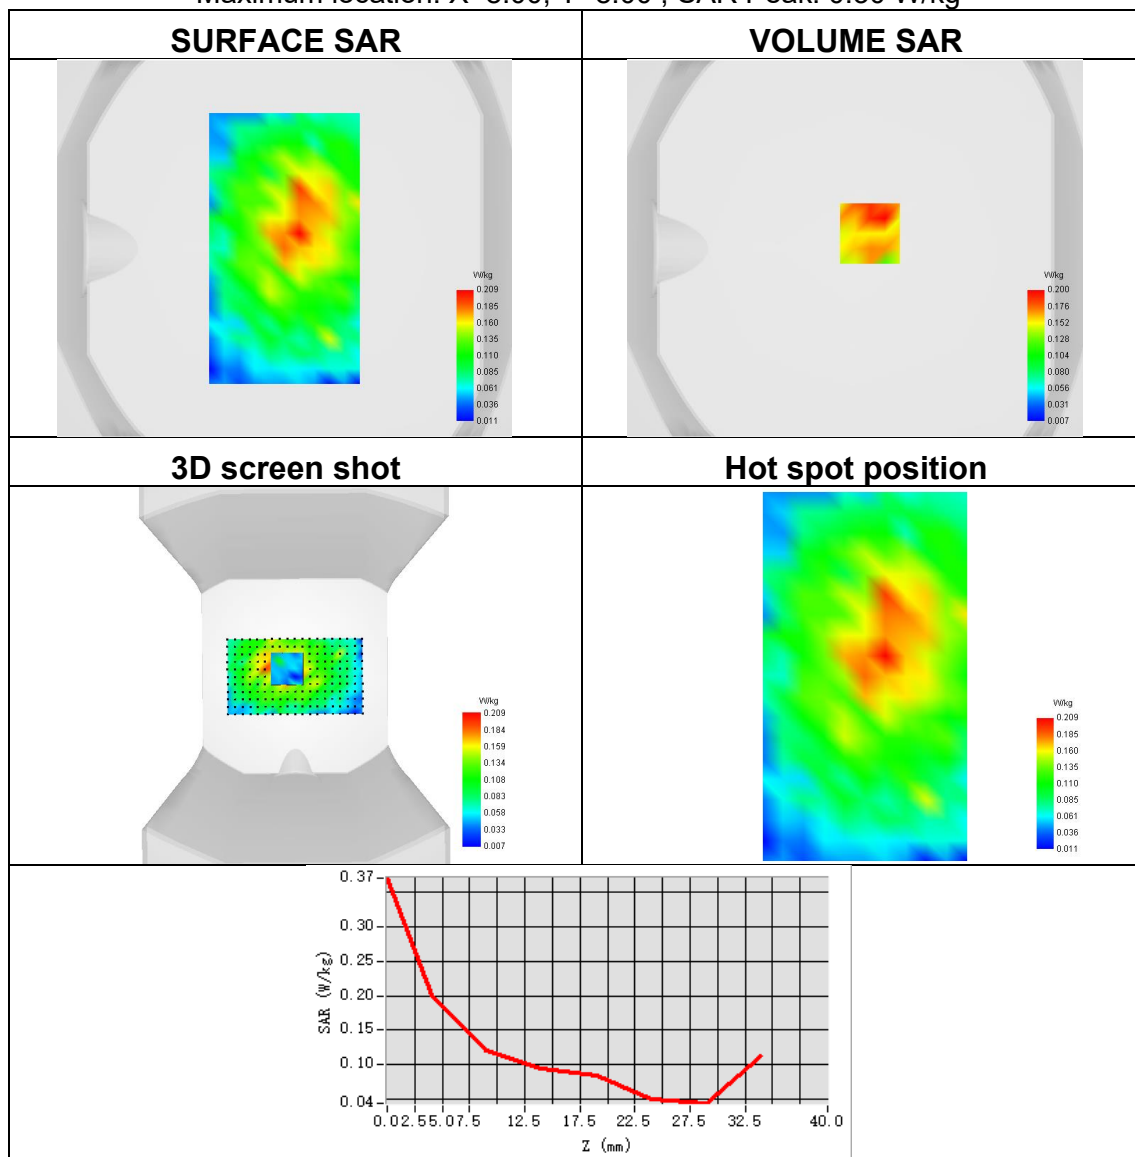




Plot 65:

Test Date	2024-08-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.039
SAR 1g (W/Kg)	0.082
ConvF	1.68
Relative permittivity	42.53
Conductivity (S/m)	0.86

Maximum location: X=-24.00, Y=-40.00 ; SAR Peak: 0.21 W/kg

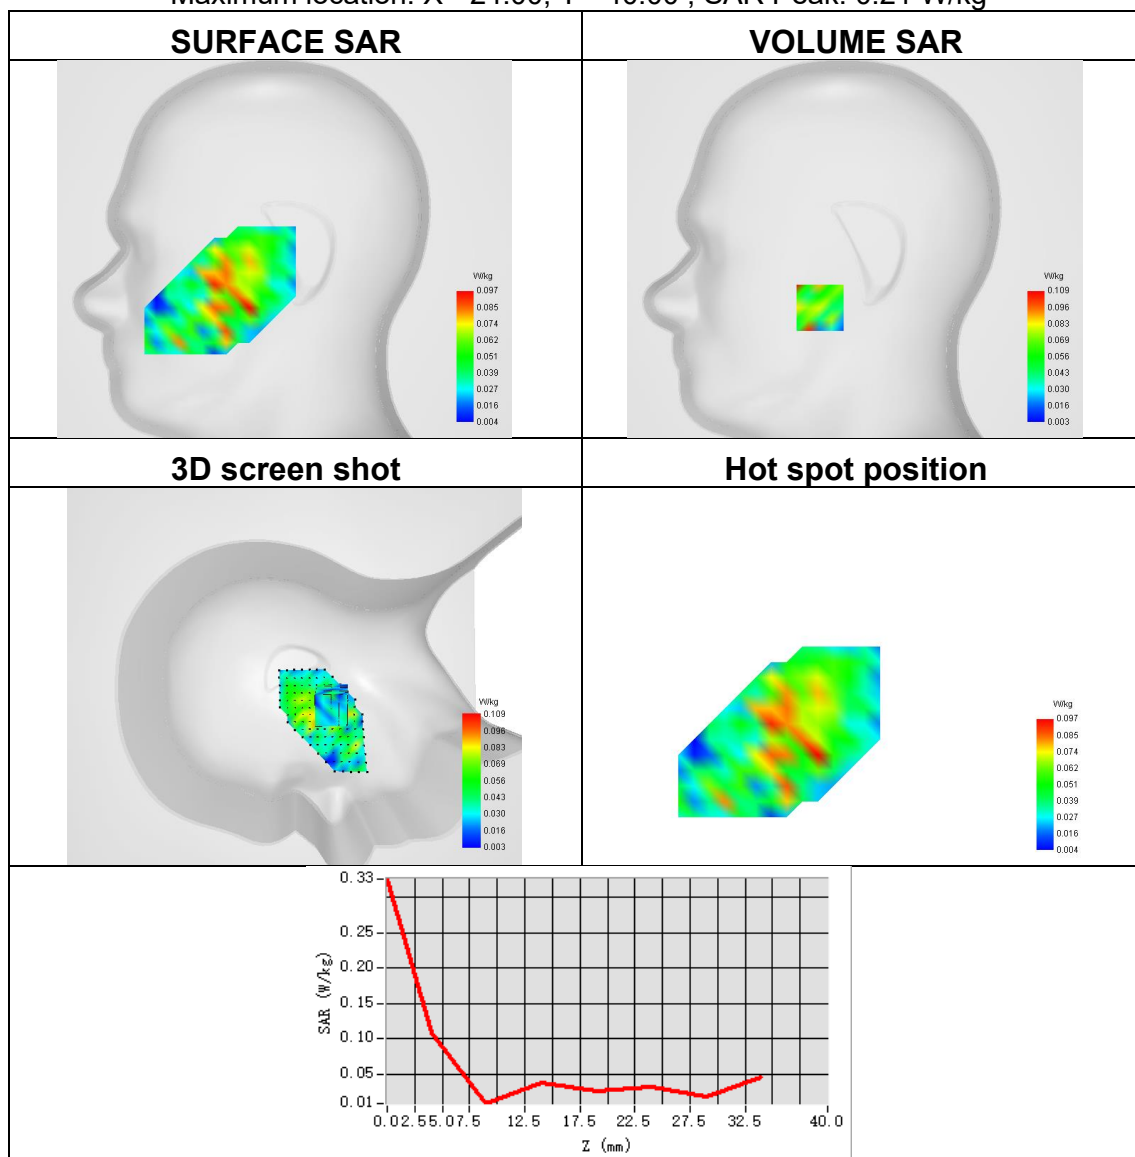




Plot 66:

Test Date	2024-08-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.087
SAR 1g (W/Kg)	0.165
ConvF	1.68
Relative permittivity	42.53
Conductivity (S/m)	0.86

Maximum location: X=-15.00, Y=-27.00 ; SAR Peak: 0.48 W/kg

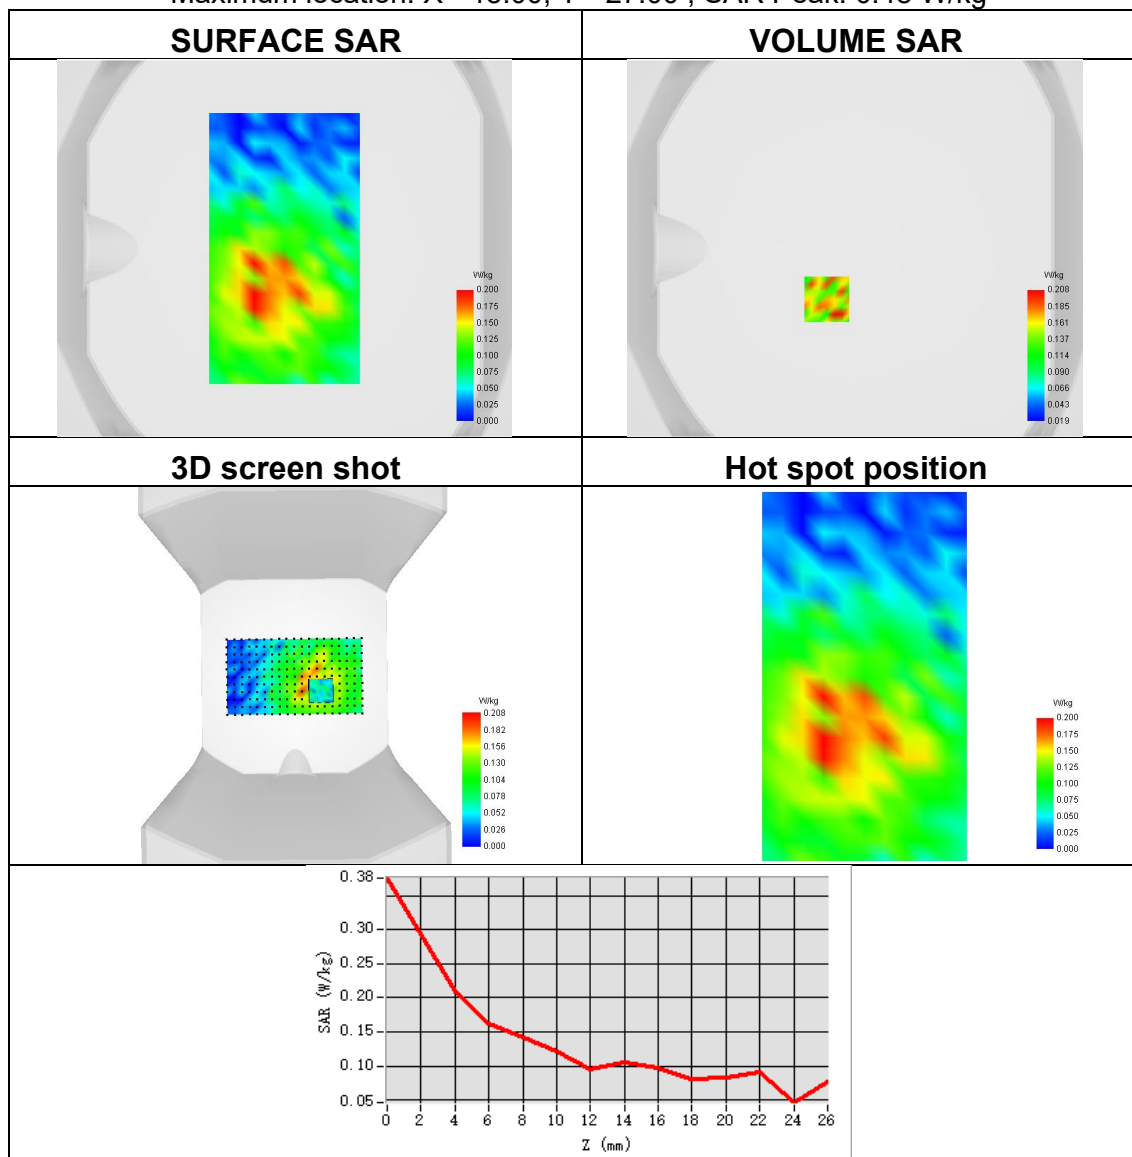




Plot 67:

Test Date	2024-08-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 17
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.054
SAR 1g (W/Kg)	0.092
ConvF	1.68
Relative permittivity	42.53
Conductivity (S/m)	0.86

Maximum location: X=-46.00, Y=-41.00 ; SAR Peak: 0.17 W/kg

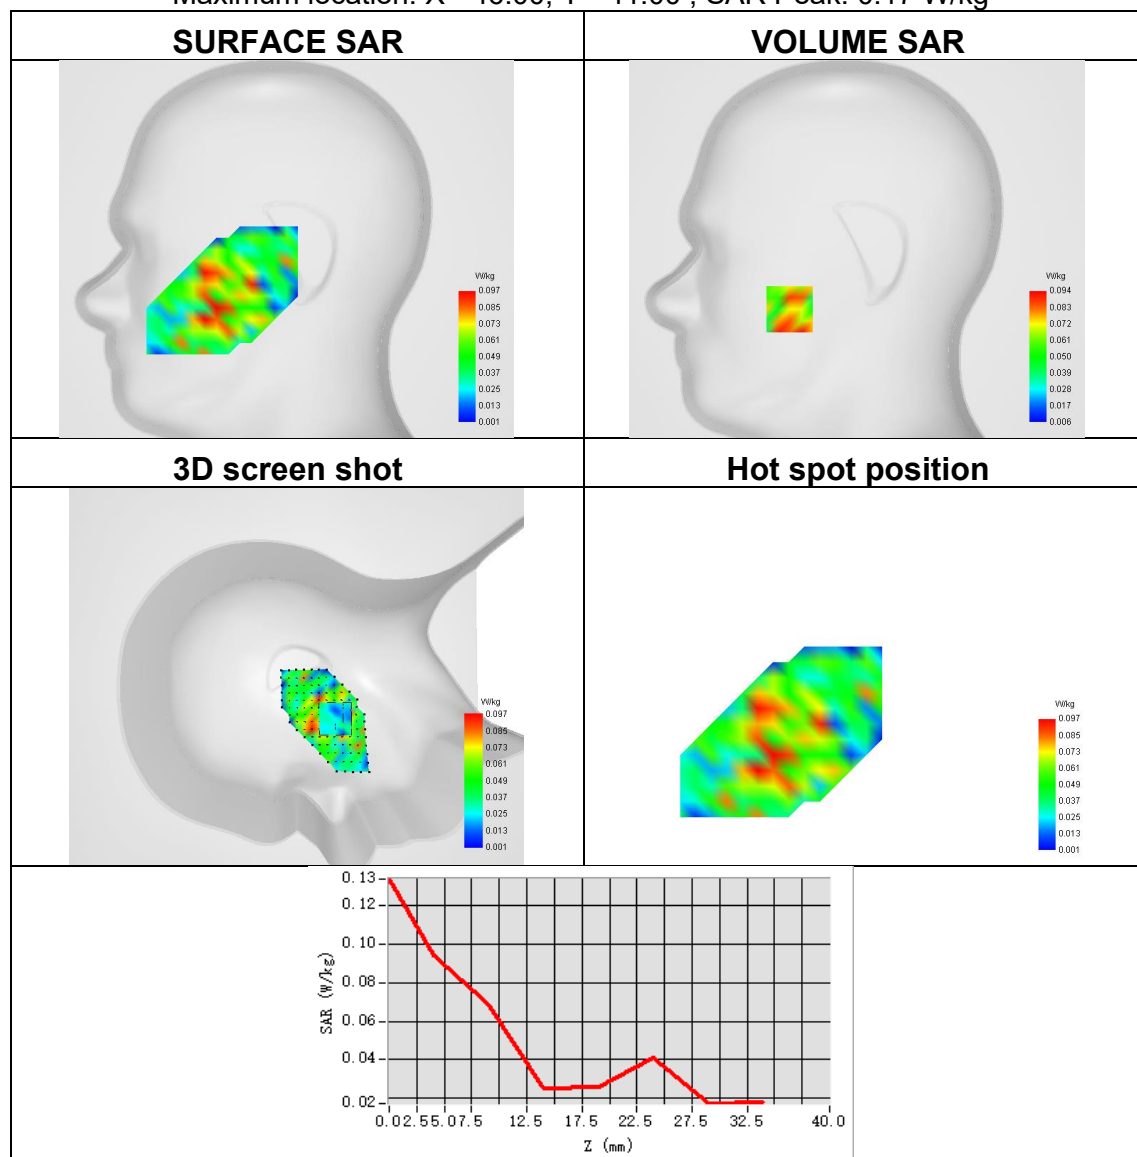




Plot 68:

Test Date	2024-08-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 17
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.110
SAR 1g (W/Kg)	0.225
ConvF	1.68
Relative permittivity	42.53
Conductivity (S/m)	0.86

Maximum location: X=0.00, Y=15.00 ; SAR Peak: 0.34 W/kg

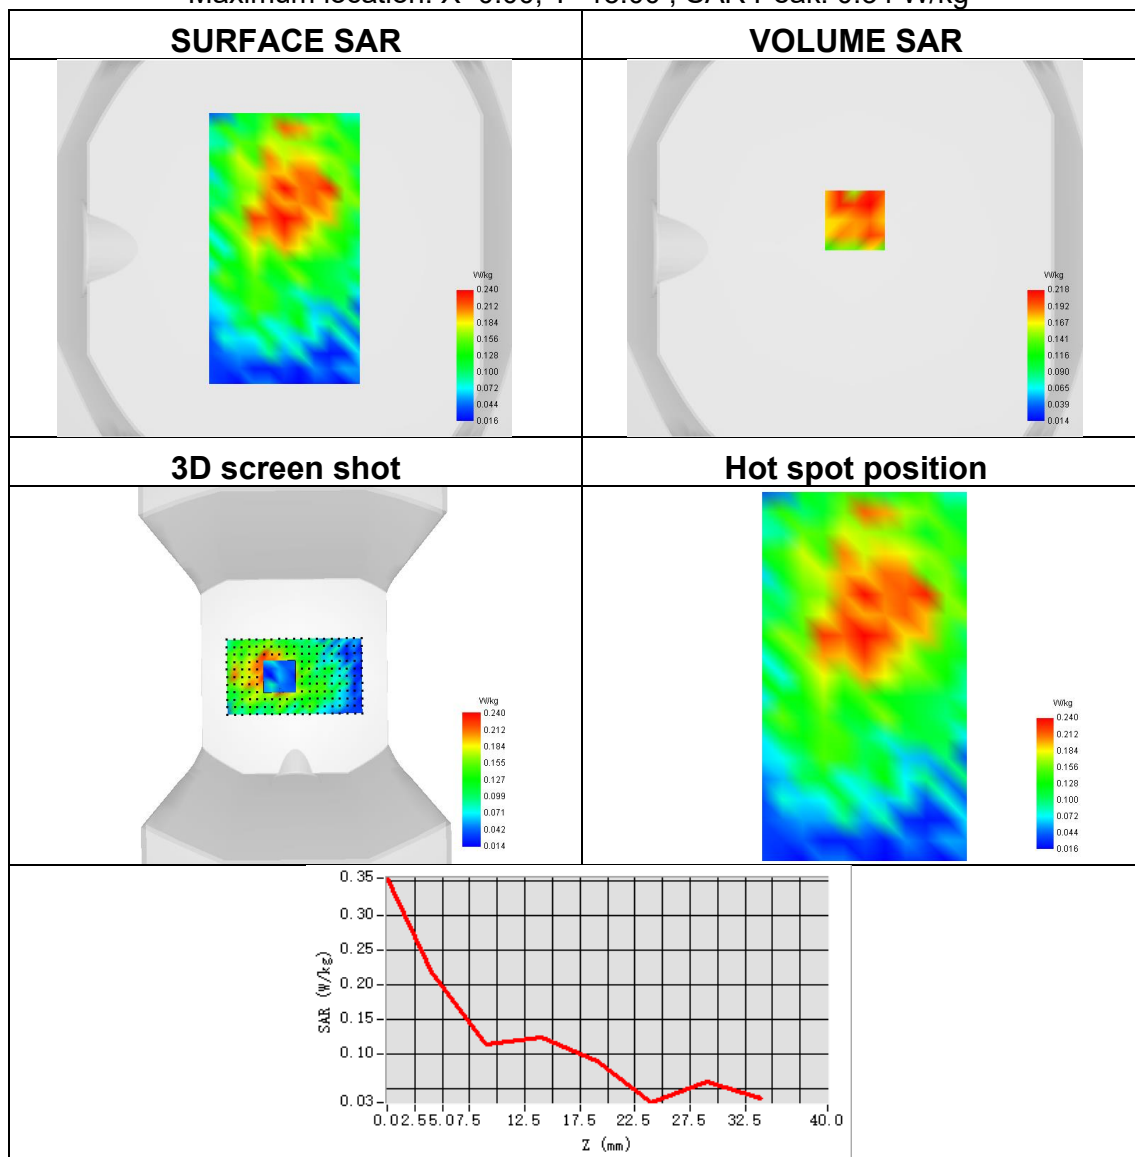




Plot 69:

Test Date	2024-08-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 25
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.037
SAR 1g (W/Kg)	0.083
ConvF	2.24
Relative permittivity	40.78
Conductivity (S/m)	1.34

Maximum location: X=-49.00, Y=-43.00 ; SAR Peak: 0.20 W/kg

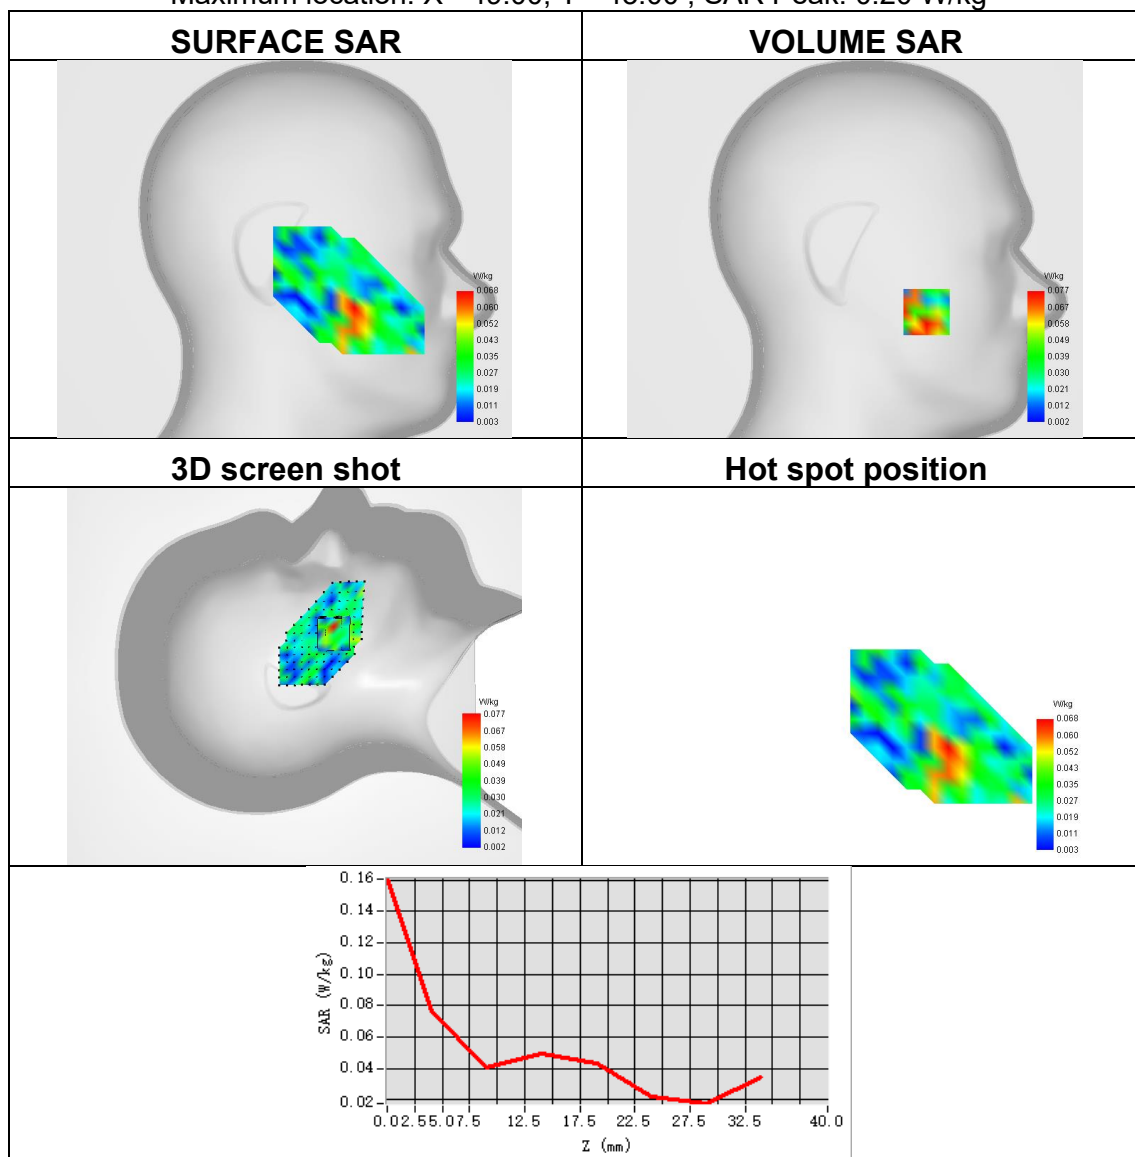




Plot 70:

Test Date	2024-08-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 25
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.417
SAR 1g (W/Kg)	0.776
ConvF	2.24
Relative permittivity	40.78
Conductivity (S/m)	1.34

Maximum location: X=8.00, Y=-23.00 ; SAR Peak: 1.25 W/kg

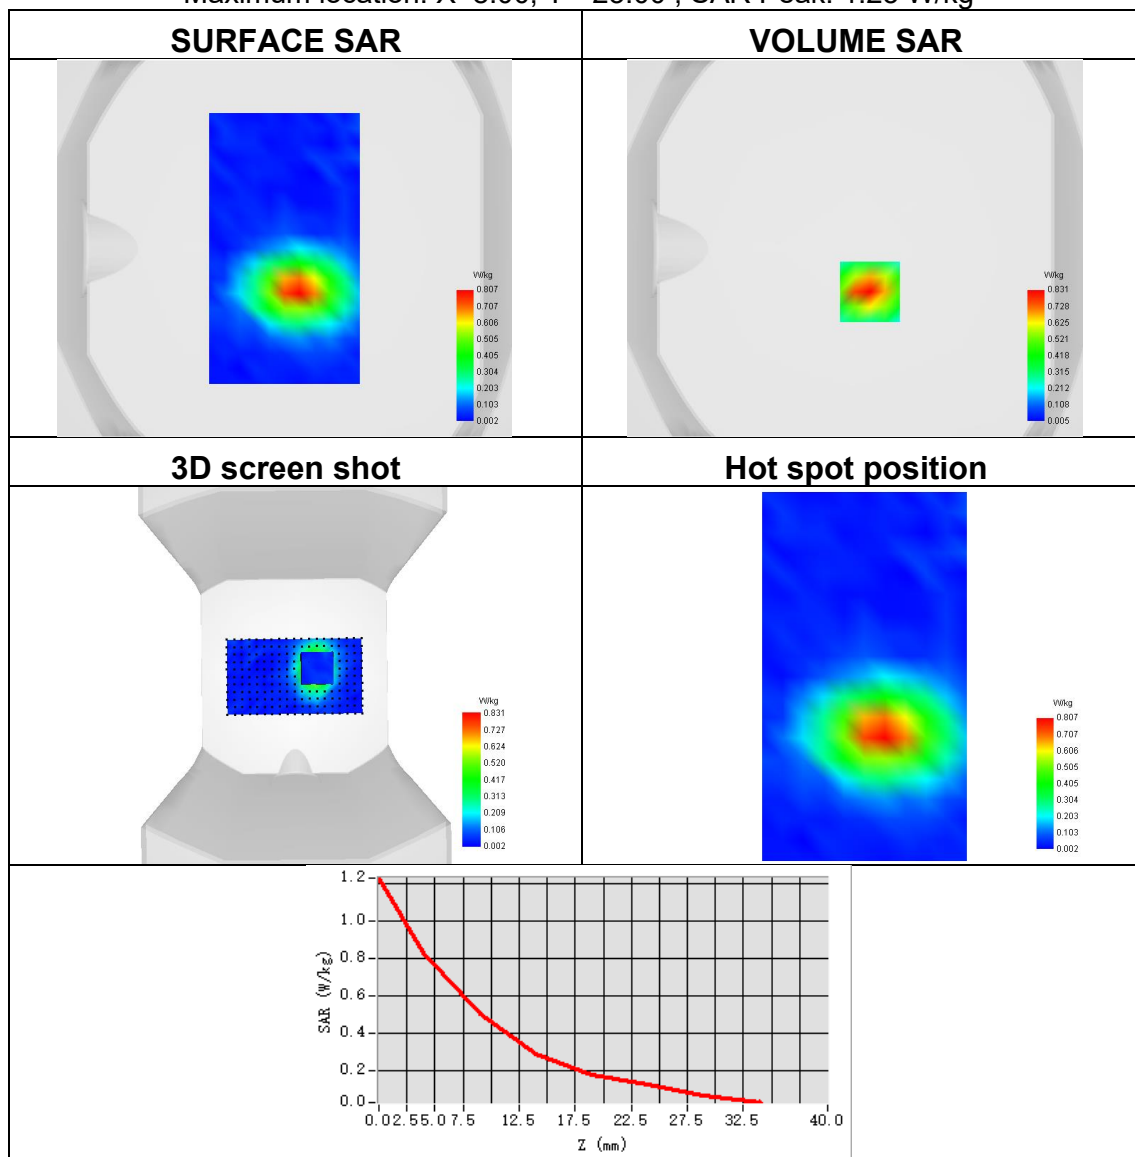




Plot 71:

Test Date	2024-08-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 26
Signal	LTE FDD
Frequency	841.5
SAR 10g (W/Kg)	0.052
SAR 1g (W/Kg)	0.094
ConvF	1.70
Relative permittivity	41.13
Conductivity (S/m)	0.93

Maximum location: X=-30.00, Y=-2.00 ; SAR Peak: 0.28 W/kg

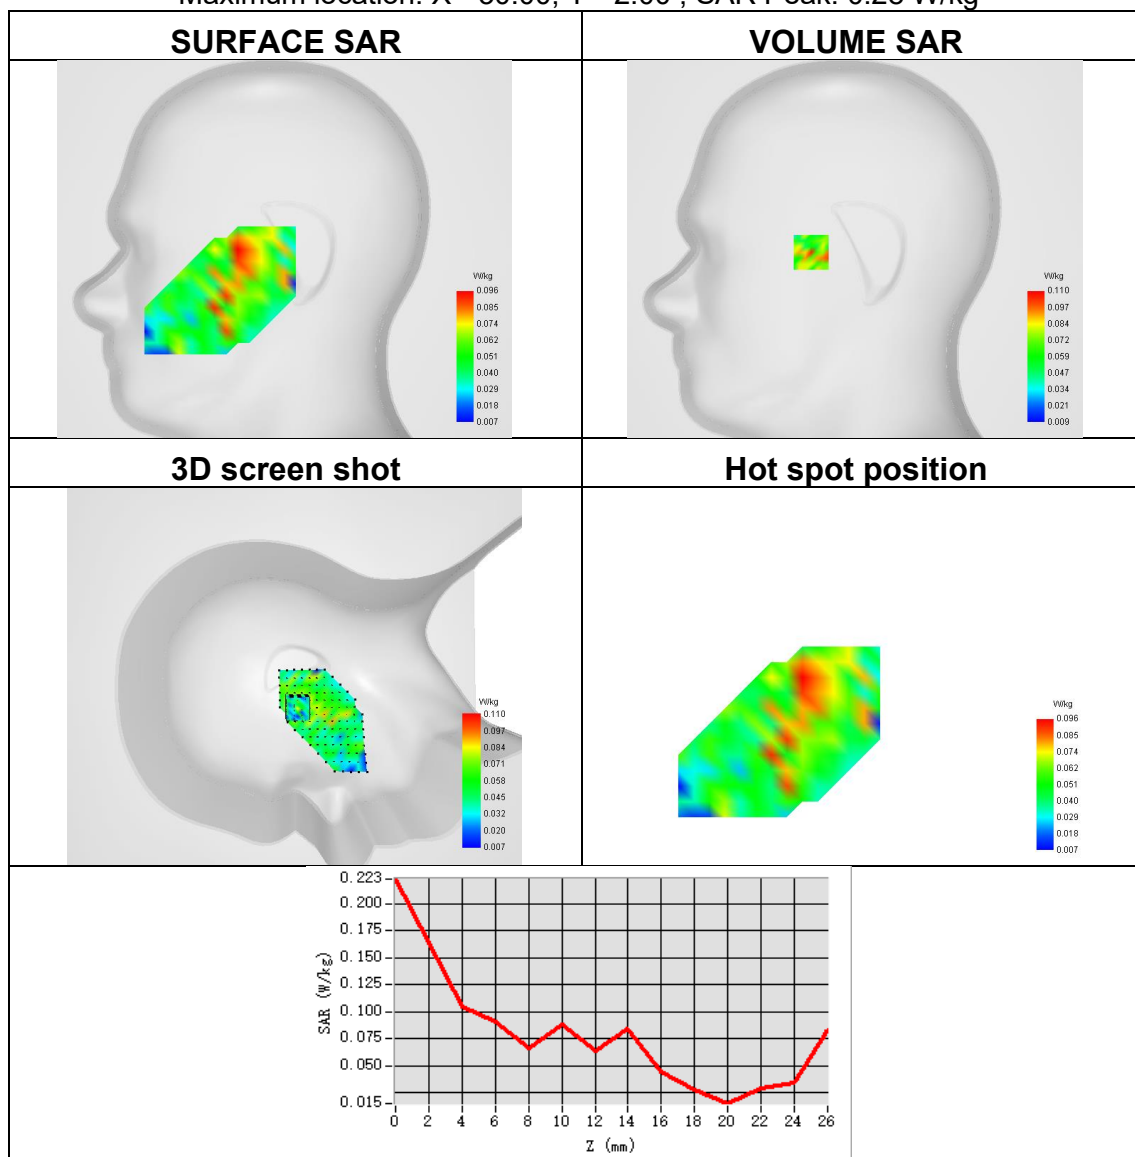




Plot 72:

Test Date	2024-08-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 26
Signal	LTE FDD
Frequency	841.5
SAR 10g (W/Kg)	0.065
SAR 1g (W/Kg)	0.136
ConvF	1.70
Relative permittivity	41.13
Conductivity (S/m)	0.93

Maximum location: X=1.00, Y=5.00 ; SAR Peak: 0.30 W/kg

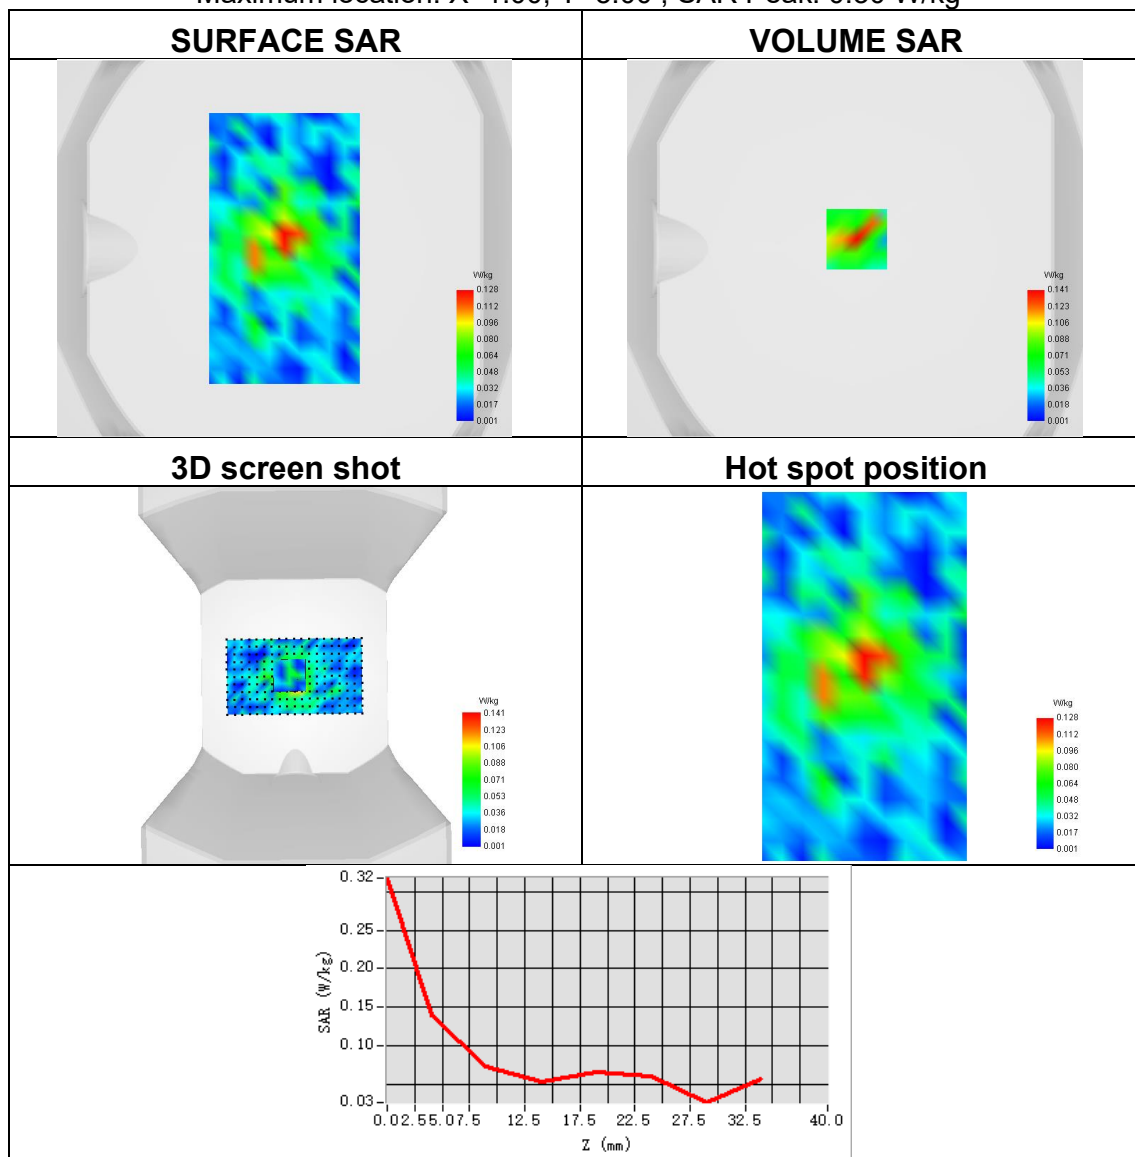




Plot 73:

Test Date	2024-08-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 38
Signal	LTE TDD
Frequency	2610
SAR 10g (W/Kg)	0.024
SAR 1g (W/Kg)	0.054
ConvF	2.35
Relative permittivity	39.44
Conductivity (S/m)	1.93

Maximum location: X=-32.00, Y=-48.00 ; SAR Peak: 0.13 W/kg

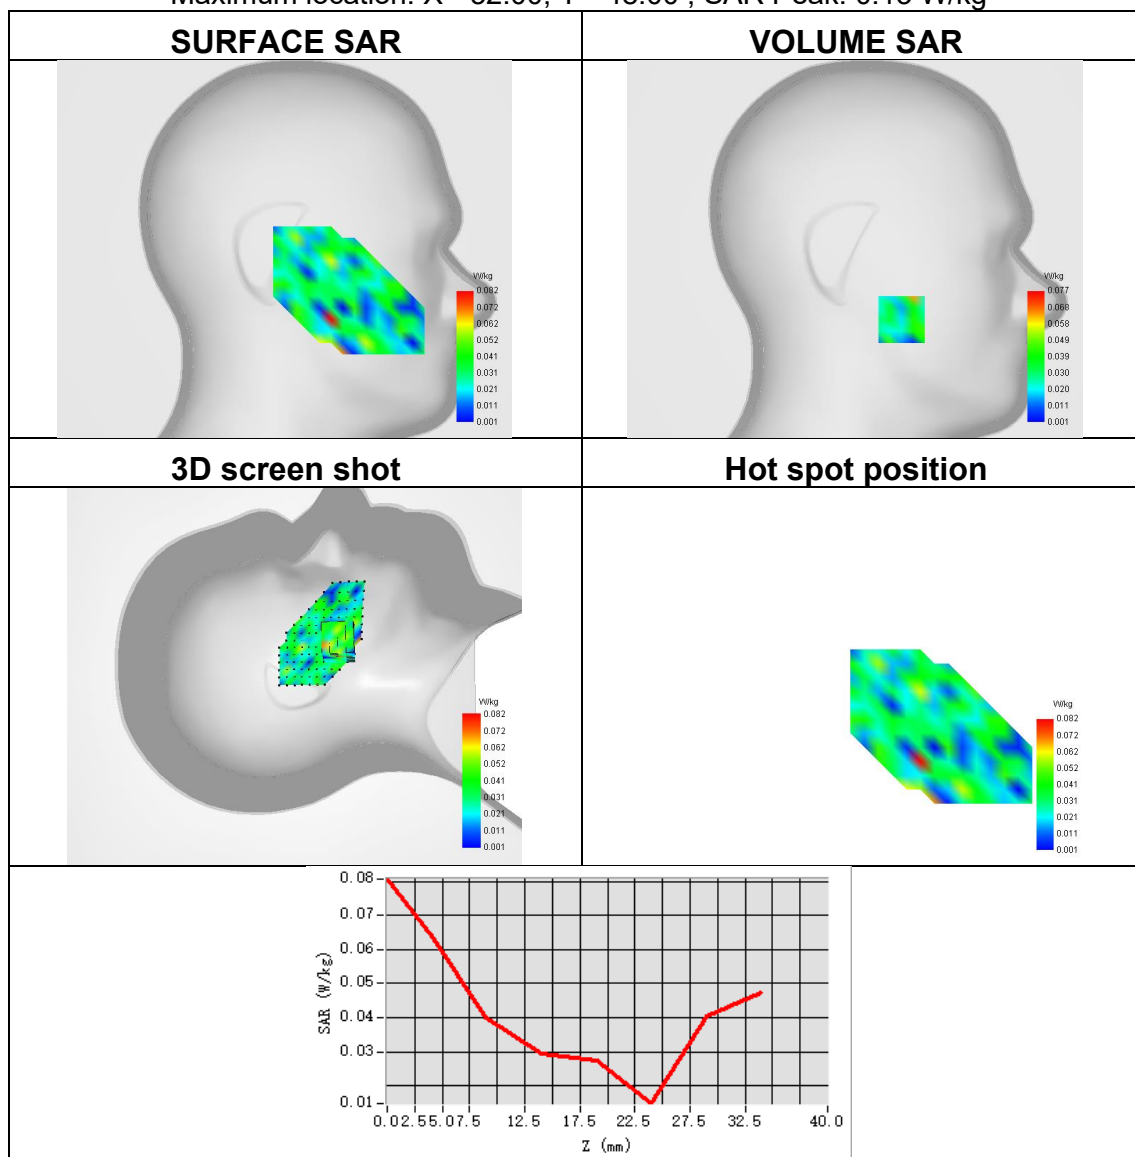




Plot 74:

Test Date	2024-08-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 38
Signal	LTE TDD
Frequency	2610
SAR 10g (W/Kg)	0.114
SAR 1g (W/Kg)	0.231
ConvF	2.35
Relative permittivity	39.44
Conductivity (S/m)	1.93

Maximum location: X=9.00, Y=-7.00 ; SAR Peak: 0.46 W/kg

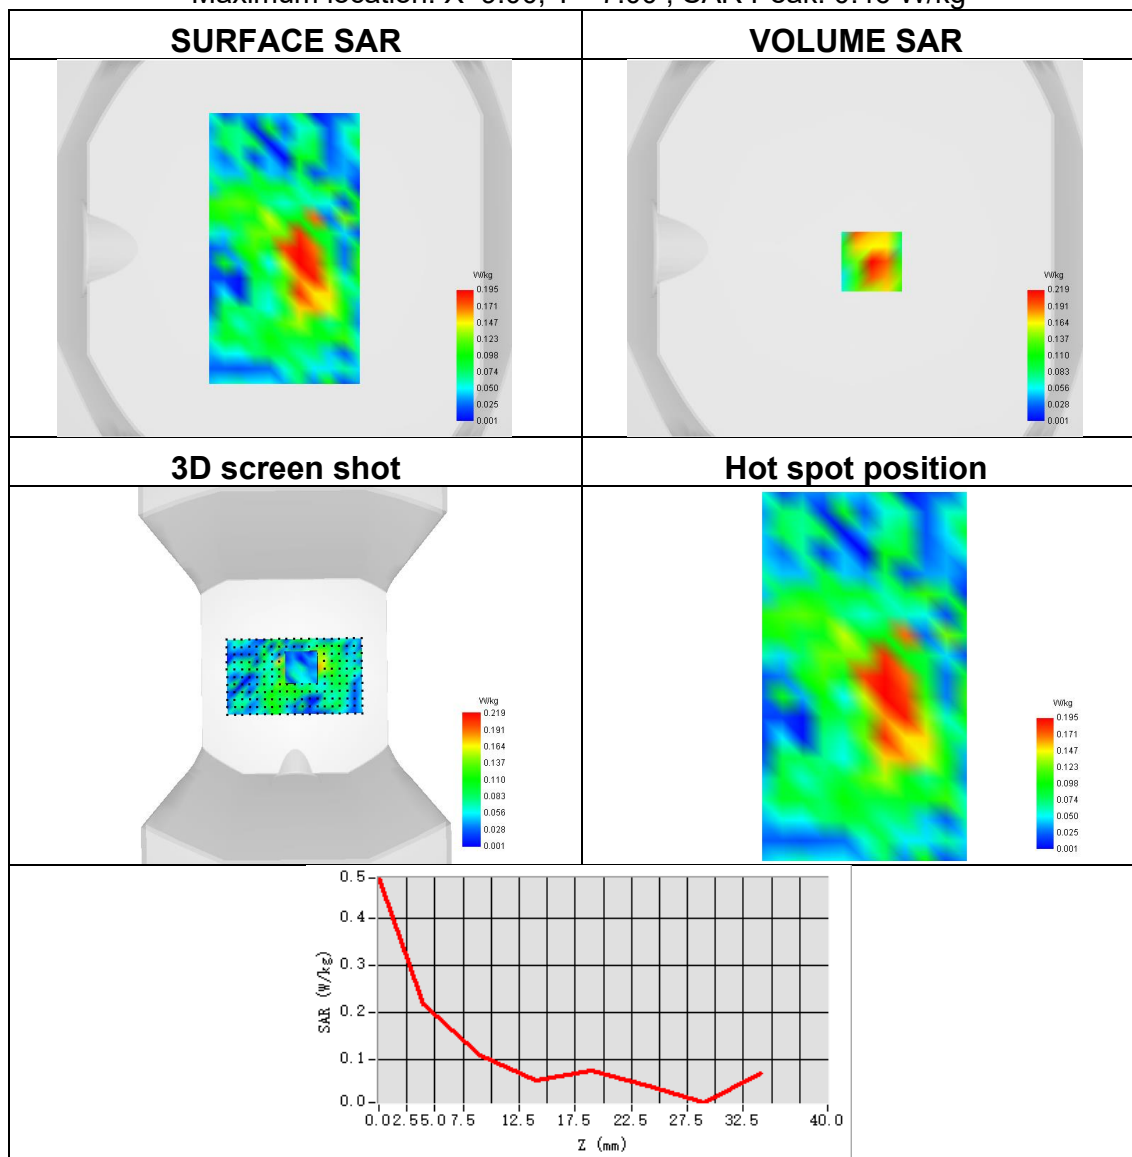




Plot 75:

Test Date	2024-08-12
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 40
Signal	LTE TDD
Frequency	2310
SAR 10g (W/Kg)	0.025
SAR 1g (W/Kg)	0.068
ConvF	2.31
Relative permittivity	39.42
Conductivity (S/m)	1.65

Maximum location: X=-56.00, Y=-15.00 ; SAR Peak: 0.20 W/kg

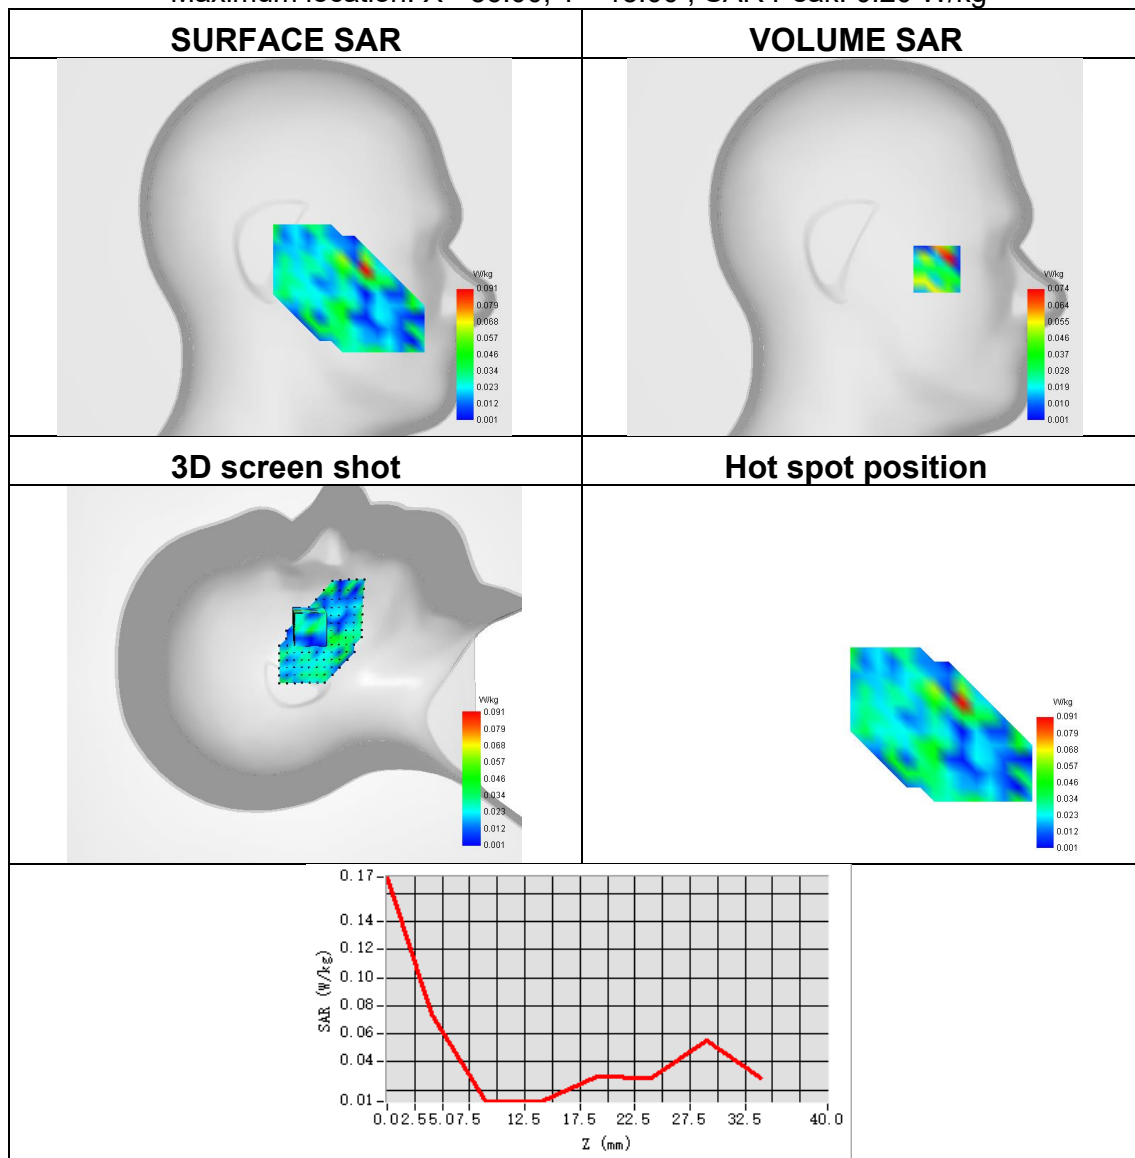




Plot 76:

Test Date	2024-08-12
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 40
Signal	LTE TDD
Frequency	2310
SAR 10g (W/Kg)	0.104
SAR 1g (W/Kg)	0.192
ConvF	2.31
Relative permittivity	39.42
Conductivity (S/m)	1.65

Maximum location: X=-1.00, Y=-9.00 ; SAR Peak: 0.37 W/kg

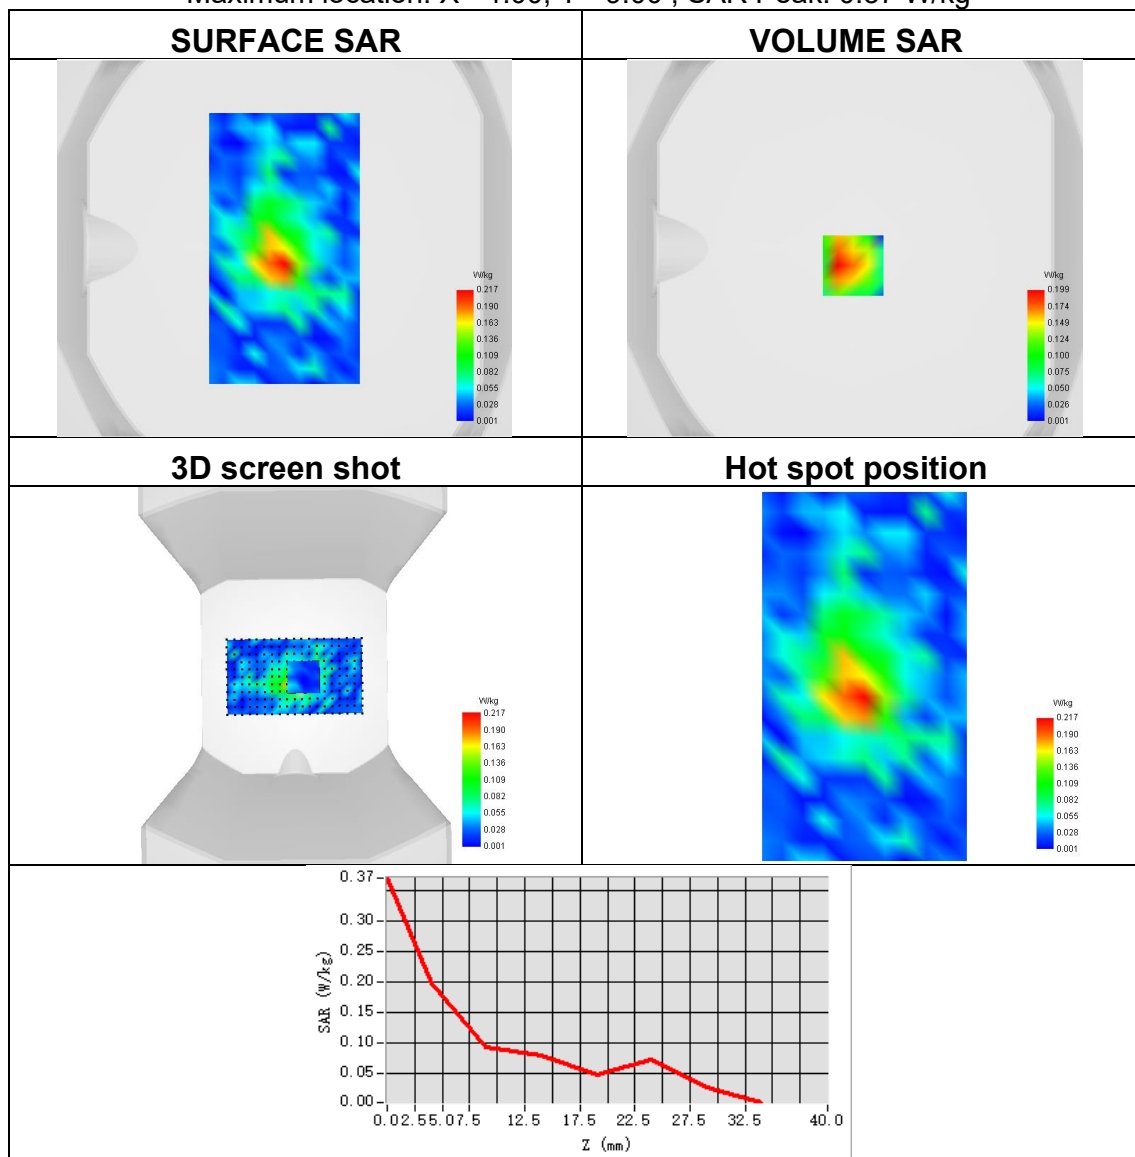




Plot 77:

Test Date	2024-08-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 41
Signal	LTE TDD
Frequency	2680
SAR 10g (W/Kg)	0.030
SAR 1g (W/Kg)	0.073
ConvF	2.35
Relative permittivity	39.44
Conductivity (S/m)	1.93

Maximum location: X=-23.00, Y=-17.00 ; SAR Peak: 0.20 W/kg

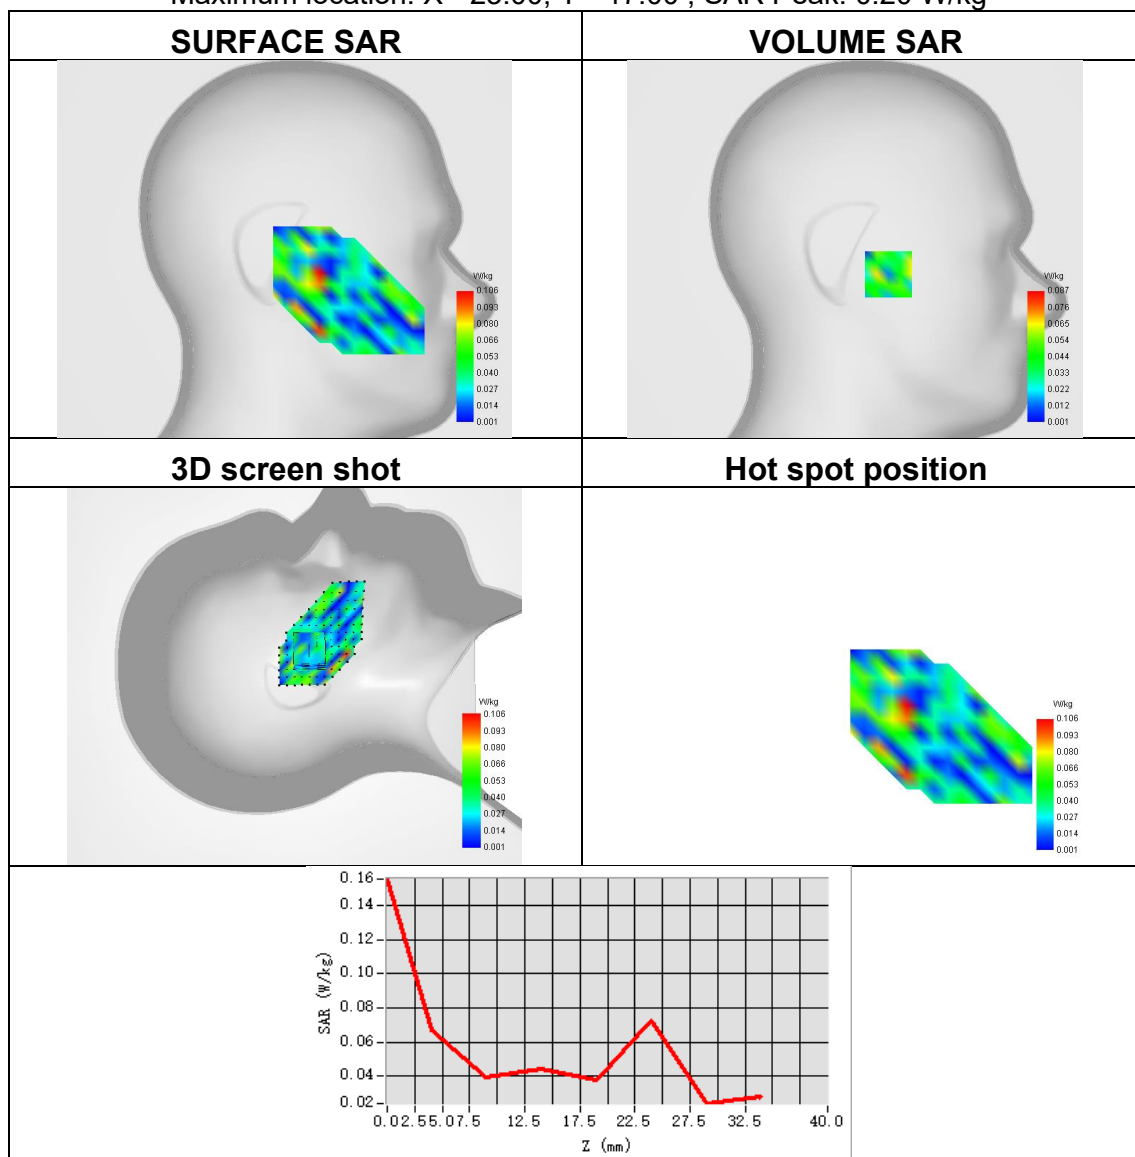




Plot 78:

Test Date	2024-08-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 41
Signal	LTE TDD
Frequency	2680
SAR 10g (W/Kg)	0.075
SAR 1g (W/Kg)	0.174
ConvF	2.35
Relative permittivity	39.44
Conductivity (S/m)	1.93

Maximum location: X=-2.00, Y=15.00 ; SAR Peak: 0.37 W/kg

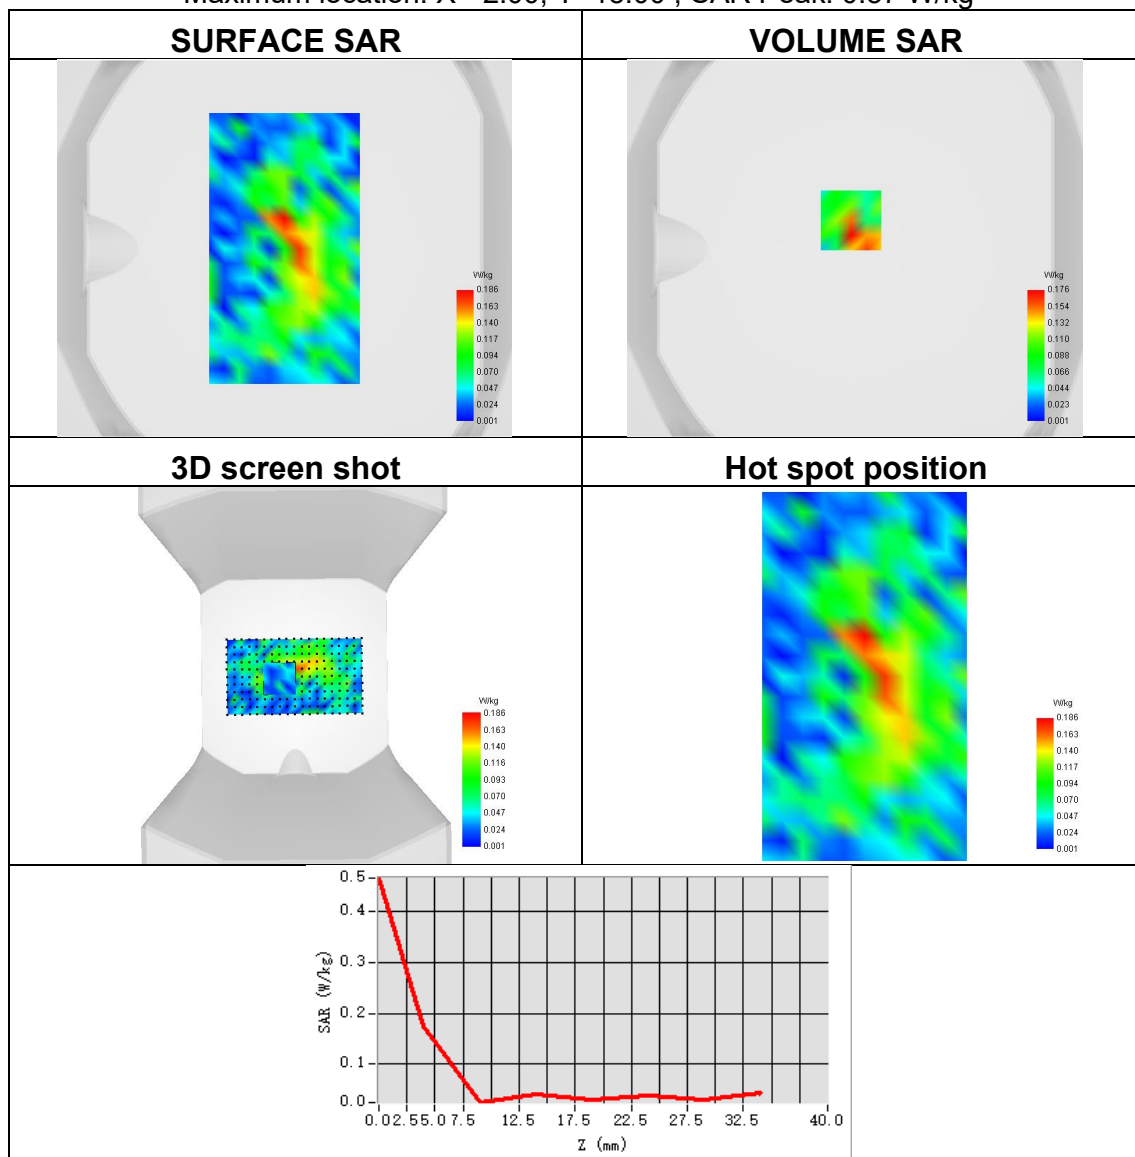




Plot 79:

Test Date	2024-08-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 66
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.030
SAR 1g (W/Kg)	0.062
ConvF	1.91
Relative permittivity	40.52
Conductivity (S/m)	1.37

Maximum location: X=-40.00, Y=-56.00 ; SAR Peak: 0.13 W/kg

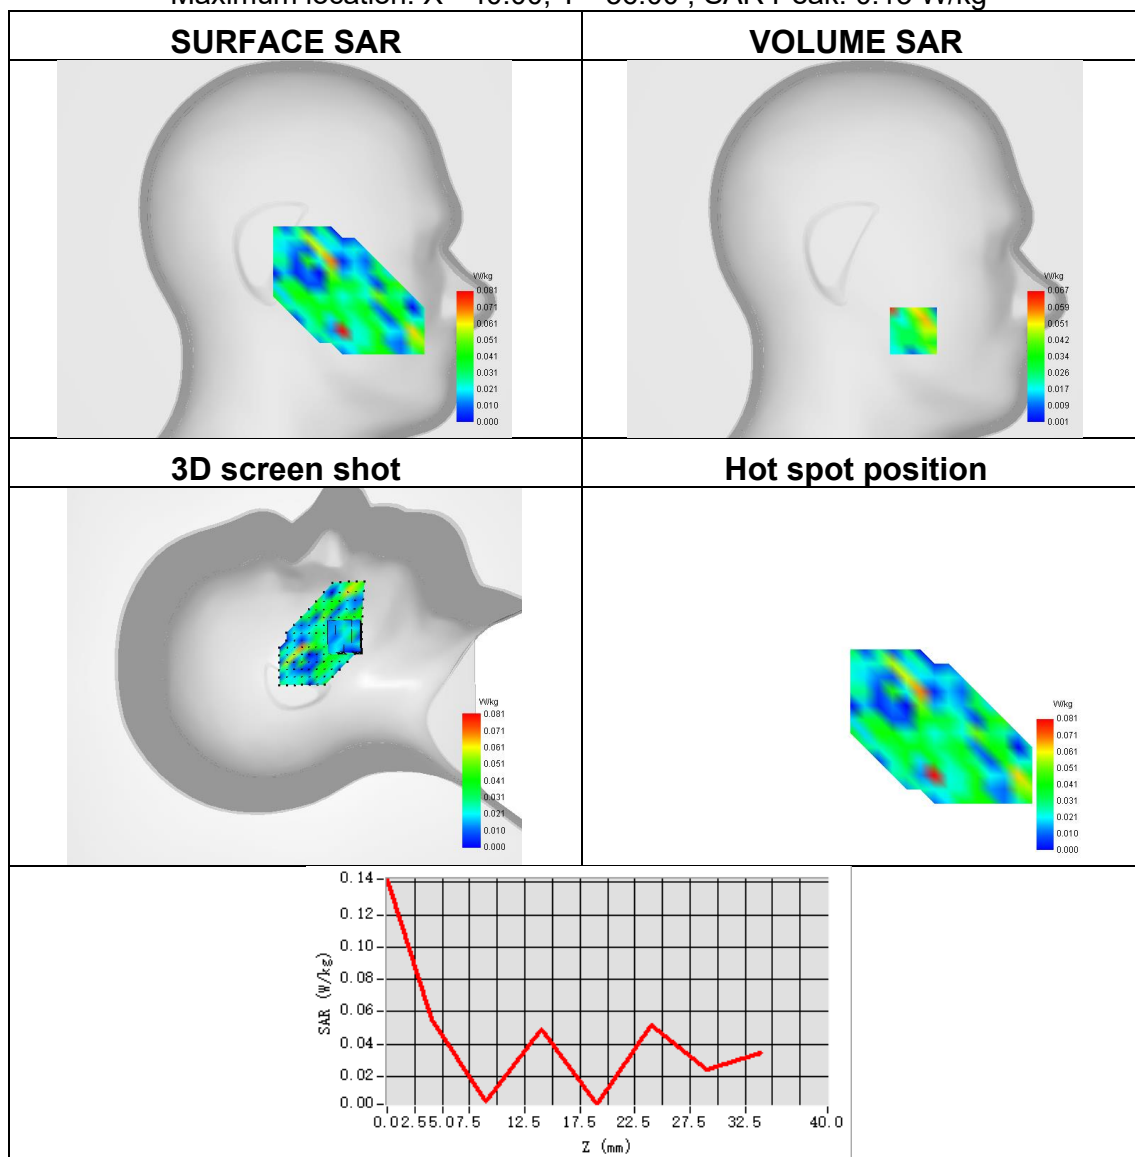




Plot 80:

Test Date	2024-08-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.212
SAR 1g (W/Kg)	0.402
ConvF	1.91
Relative permittivity	40.52
Conductivity (S/m)	1.37

Maximum location: X=-8.00, Y=1.00 ; SAR Peak: 0.71 W/kg

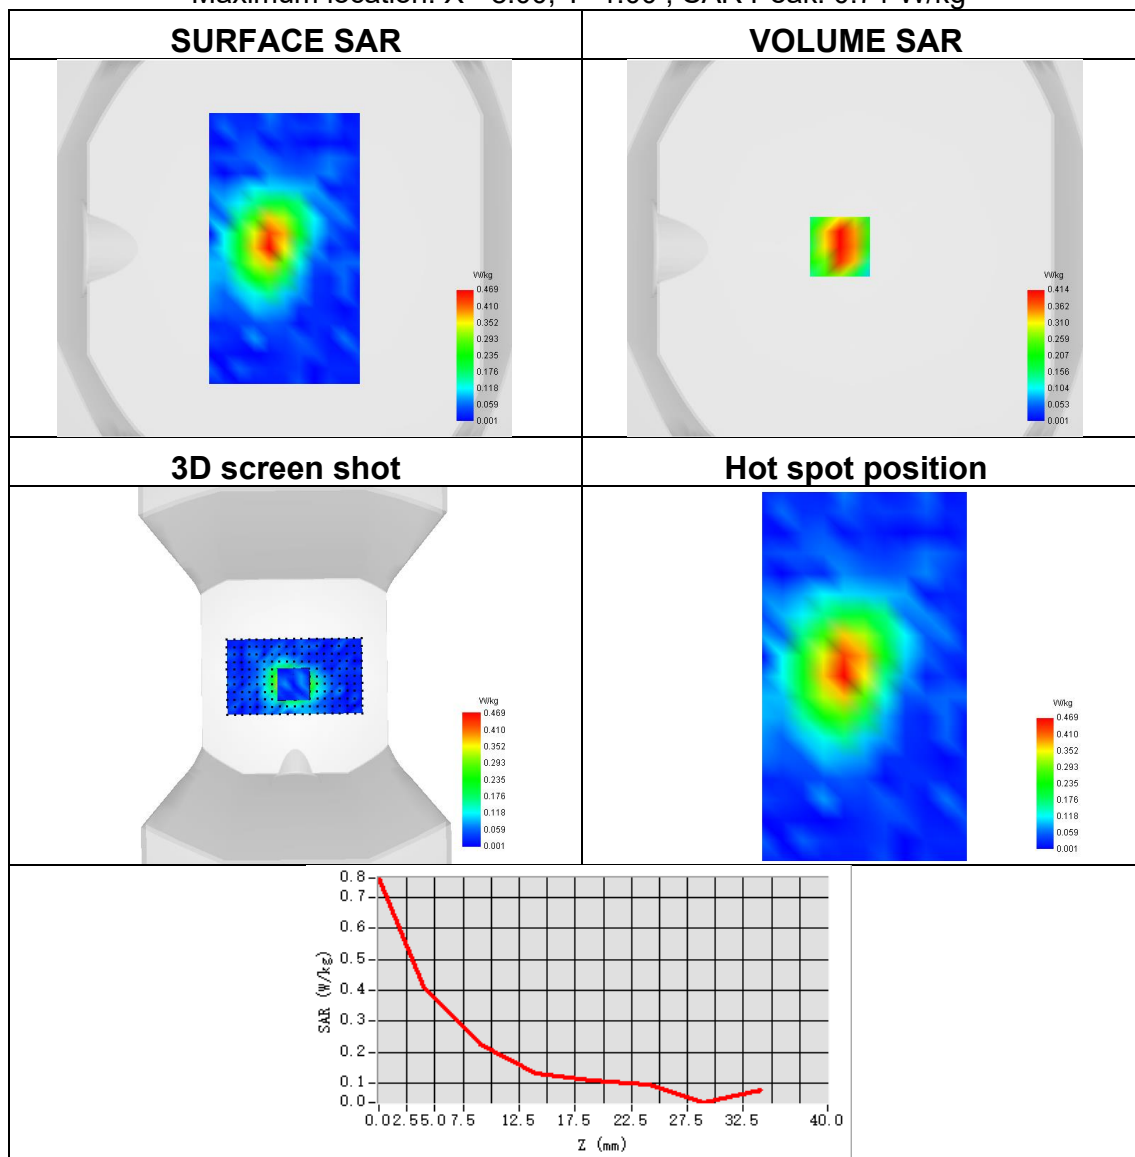




Plot 81:

Test Date	2024-08-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	NR band 2
Signal	NR FDD
Frequency	1900
SAR 10g (W/Kg)	0.147
SAR 1g (W/Kg)	0.300
ConvF	2.24
Relative permittivity	40.78
Conductivity (S/m)	1.39

Maximum location: X=-7.00, Y=5.00 ; SAR Peak: 0.60 W/kg

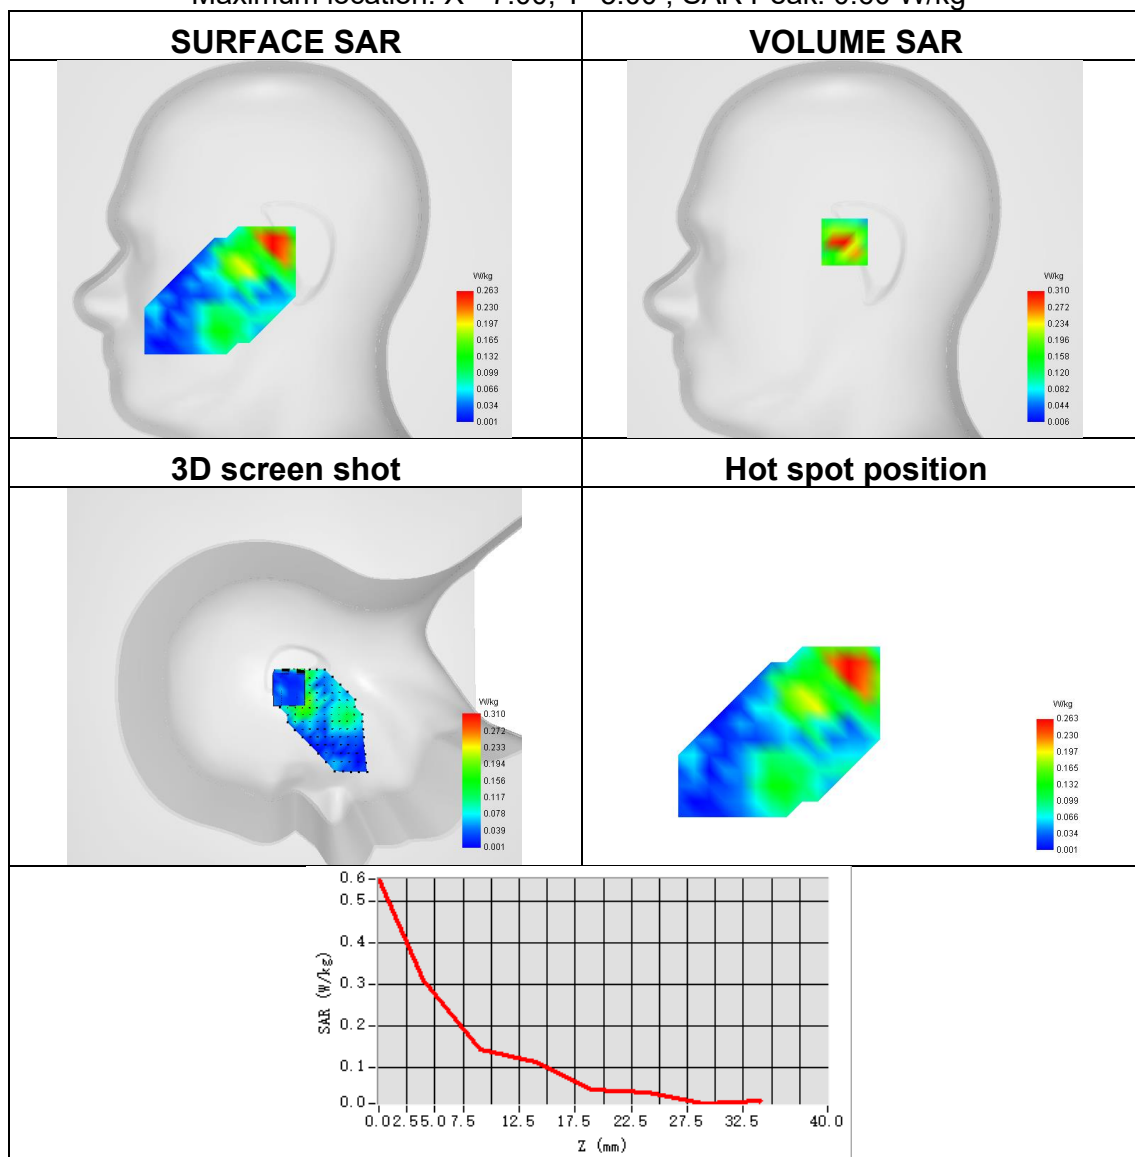




Plot 82:

Test Date	2024-08-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 2
Signal	NR FDD
Frequency	1900
SAR 10g (W/Kg)	0.204
SAR 1g (W/Kg)	0.390
ConvF	2.24
Relative permittivity	40.78
Conductivity (S/m)	1.39

Maximum location: X=23.00, Y=32.00 ; SAR Peak: 0.72 W/kg

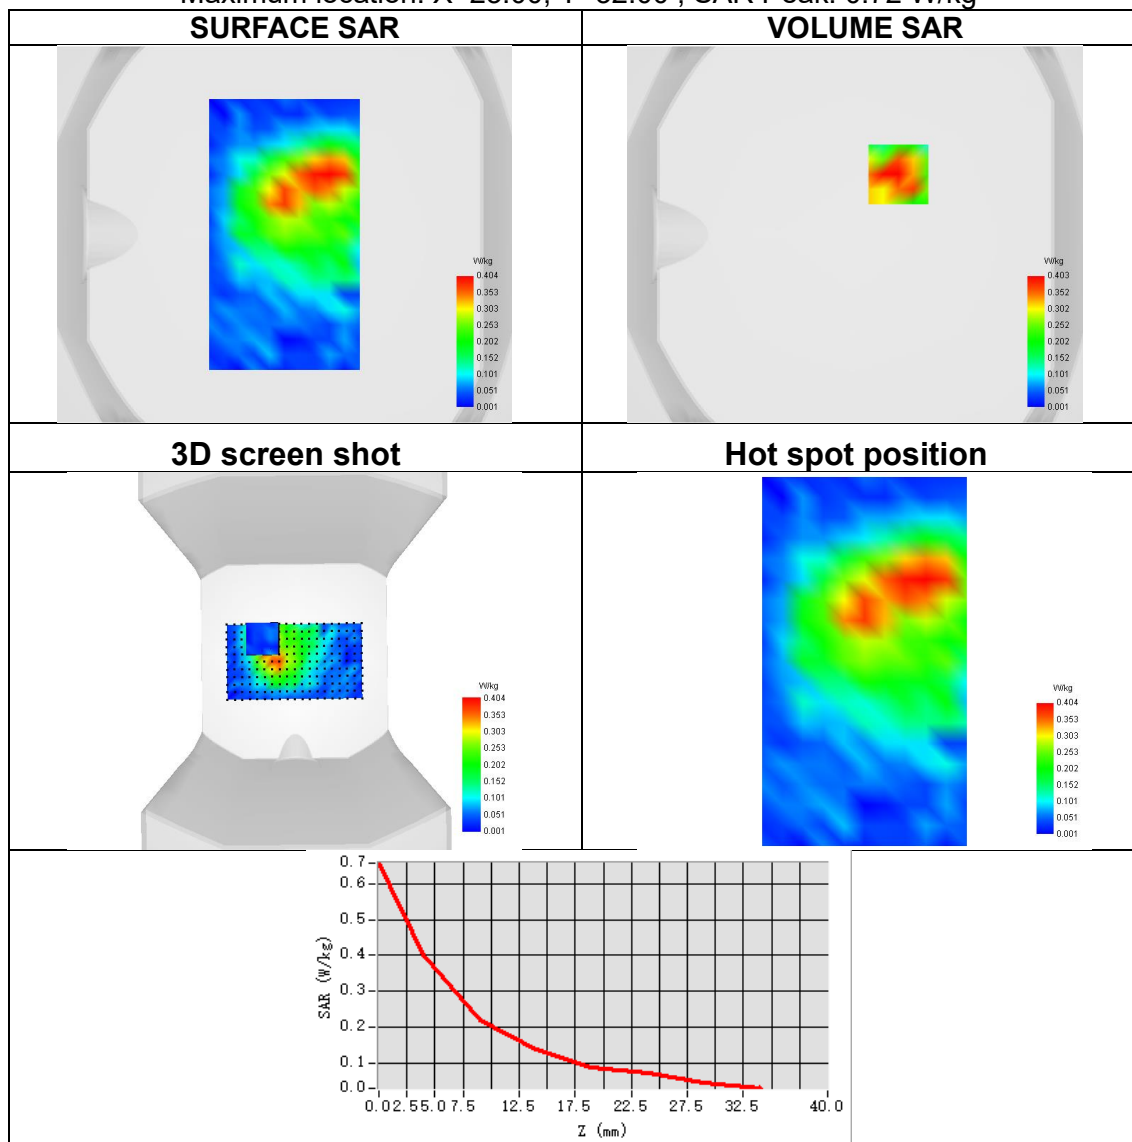




Plot 83:

Test Date	2024-08-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 5
Signal	NR FDD
Frequency	834
SAR 10g (W/Kg)	0.035
SAR 1g (W/Kg)	0.069
ConvF	1.70
Relative permittivity	41.13
Conductivity (S/m)	0.93

Maximum location: X=-40.00, Y=-48.00 ; SAR Peak: 0.16 W/kg

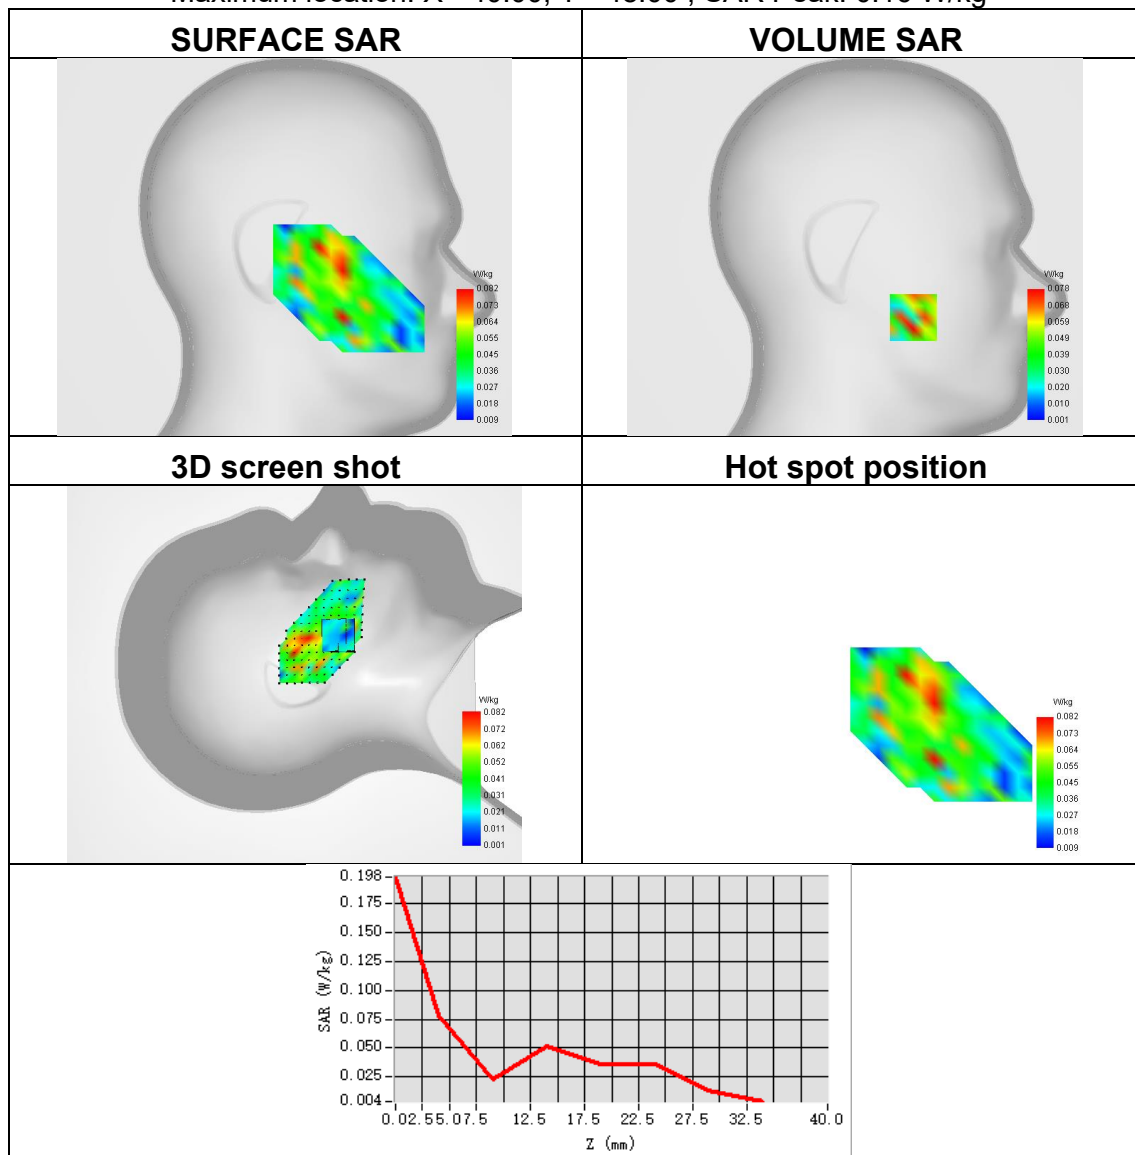




Plot 84:

Test Date	2024-08-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 5
Signal	NR FDD
Frequency	834
SAR 10g (W/Kg)	0.070
SAR 1g (W/Kg)	0.116
ConvF	1.70
Relative permittivity	41.13
Conductivity (S/m)	0.93

Maximum location: X=-8.00, Y=-31.00 ; SAR Peak: 0.21 W/kg

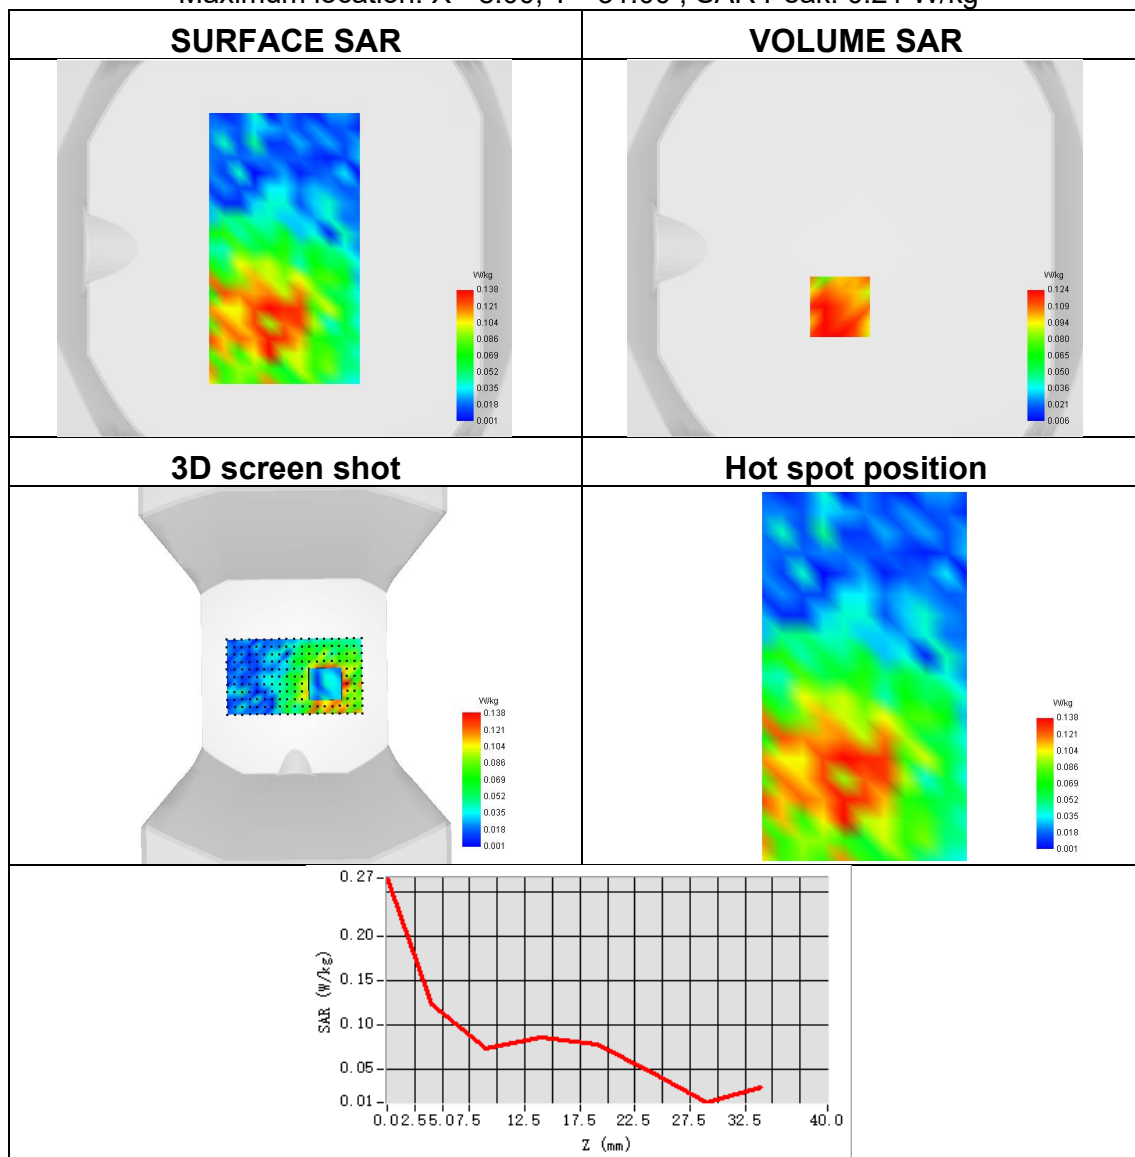




Plot 85:

Test Date	2024-08-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	NR band 7
Signal	NR FDD
Frequency	2560
SAR 10g (W/Kg)	0.345
SAR 1g (W/Kg)	0.695
ConvF	2.35
Relative permittivity	39.47
Conductivity (S/m)	1.99

Maximum location: X=-30.00, Y=-9.00 ; SAR Peak: 1.22 W/kg

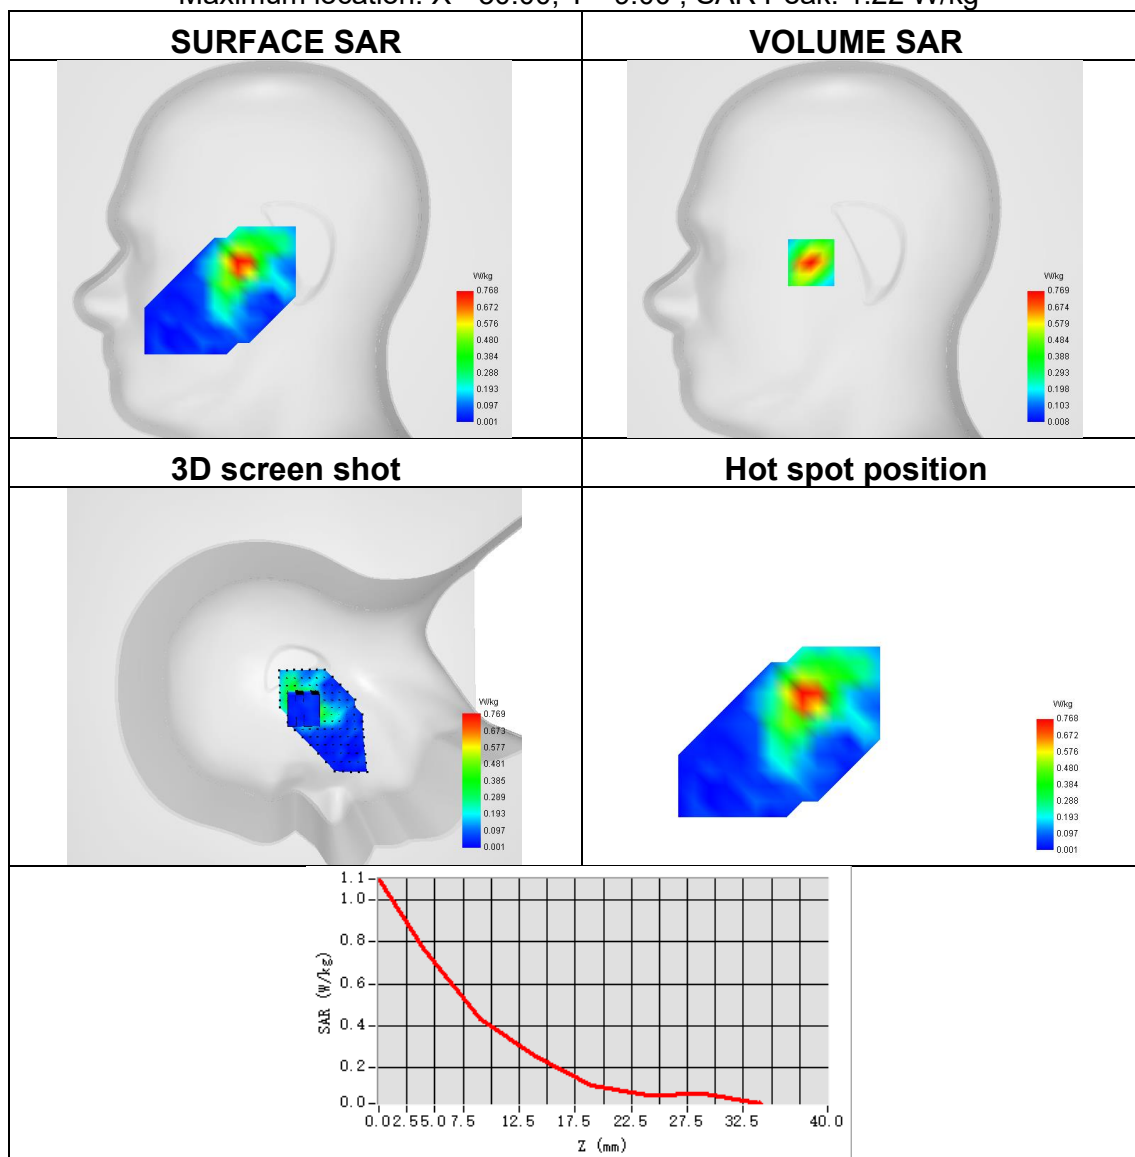




Plot 86:

Test Date	2024-08-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 7
Signal	NR FDD
Frequency	2560
SAR 10g (W/Kg)	0.098
SAR 1g (W/Kg)	0.237
ConvF	2.35
Relative permittivity	39.47
Conductivity (S/m)	1.99

Maximum location: X=15.00, Y=37.00 ; SAR Peak: 0.57 W/kg

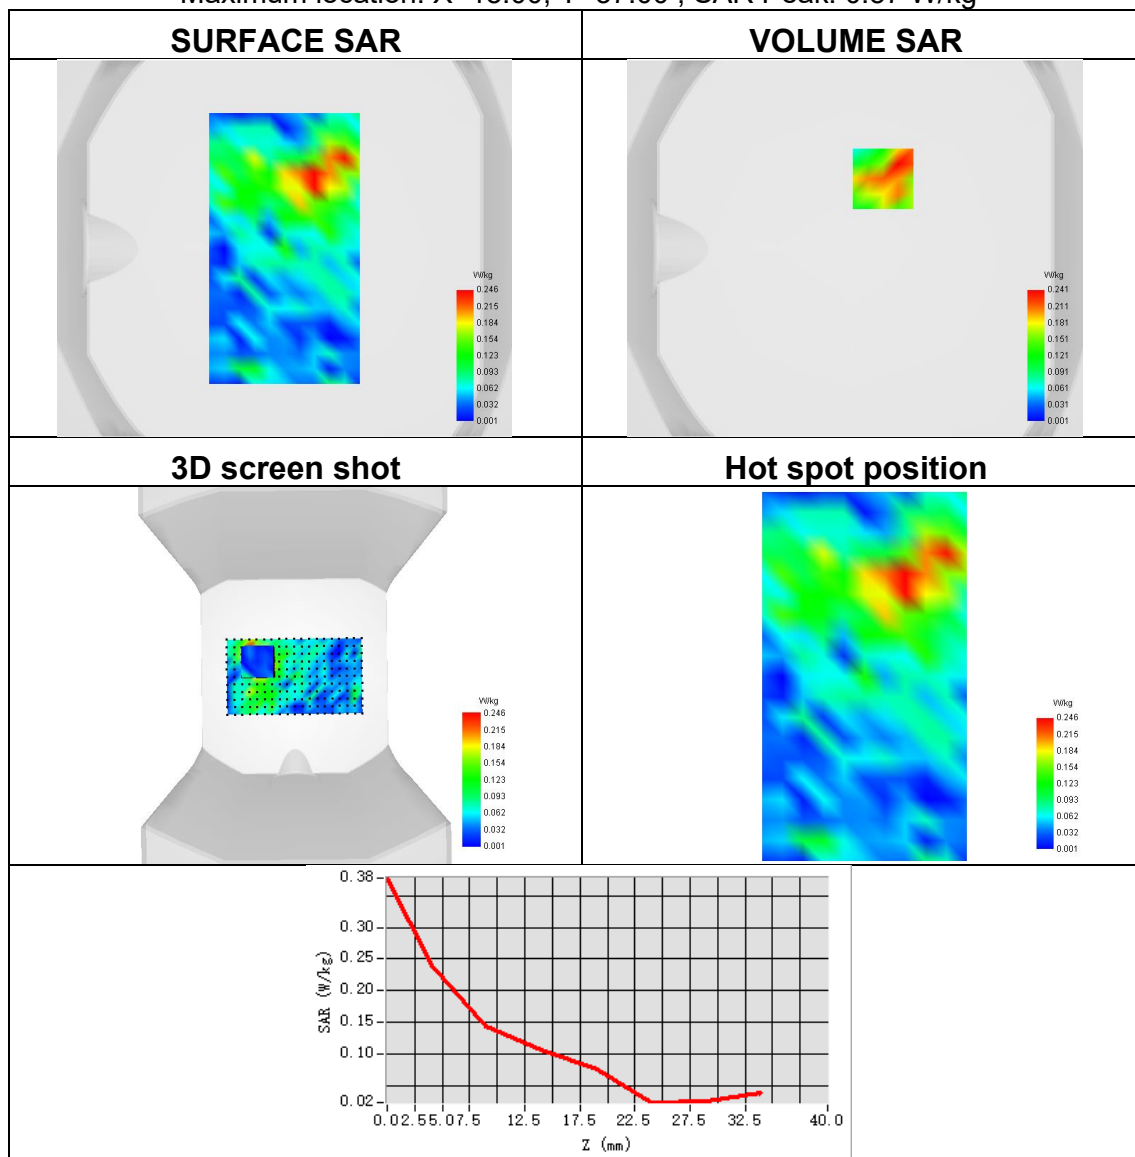




Plot 87:

Test Date	2024-08-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	NR band 25
Signal	NR FDD
Frequency	1905
SAR 10g (W/Kg)	0.192
SAR 1g (W/Kg)	0.376
ConvF	2.24
Relative permittivity	40.78
Conductivity (S/m)	1.39

Maximum location: X=-23.00, Y=-8.00 ; SAR Peak: 0.68 W/kg

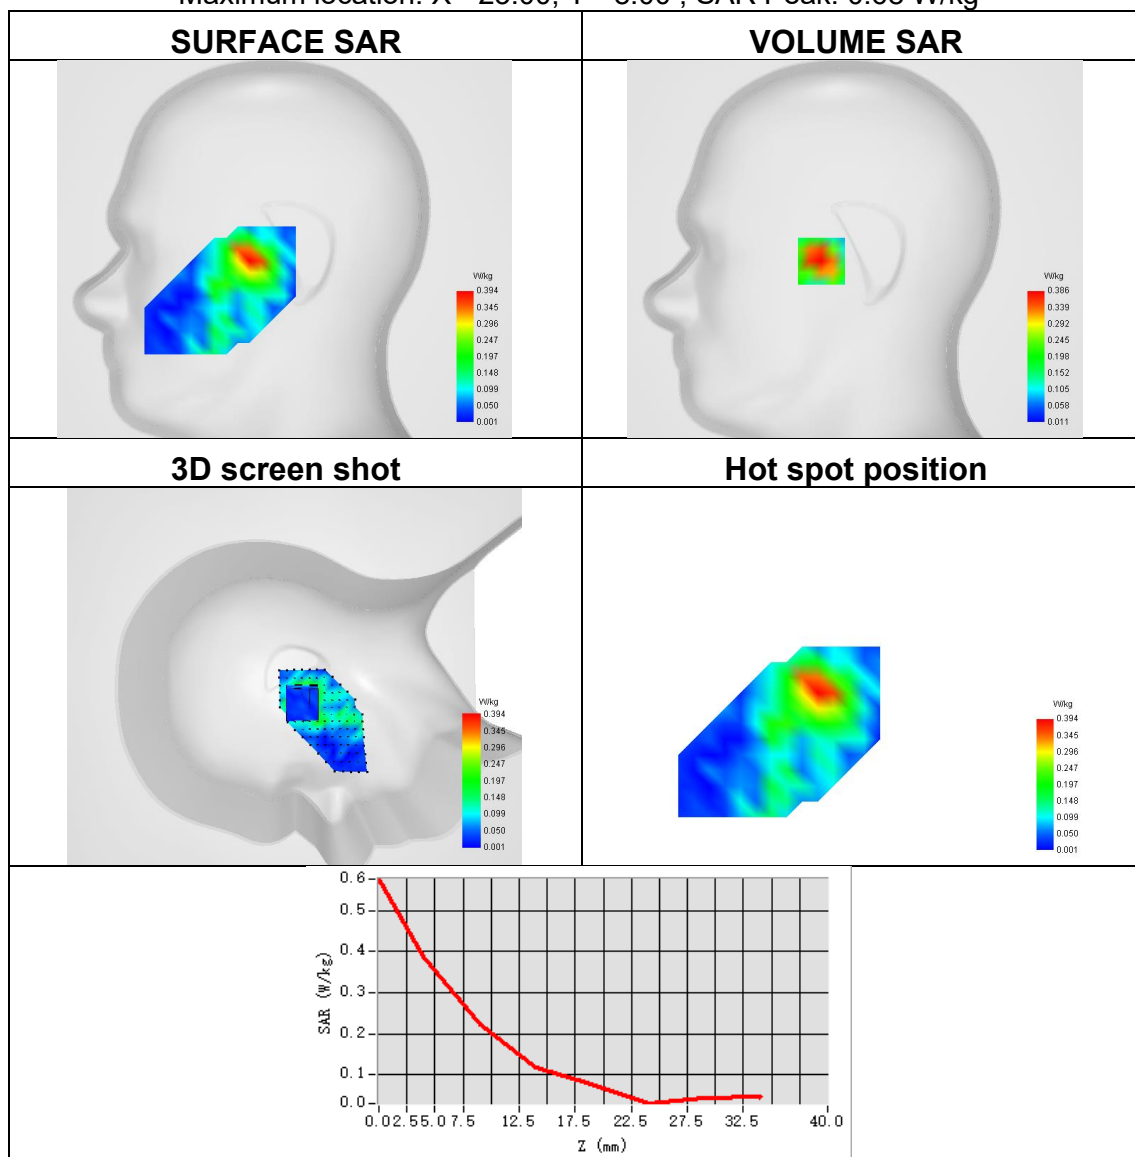




Plot 88:

Test Date	2024-08-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 25
Signal	NR FDD
Frequency	1905
SAR 10g (W/Kg)	0.242
SAR 1g (W/Kg)	0.451
ConvF	2.24
Relative permittivity	40.78
Conductivity (S/m)	1.39

Maximum location: X=23.00, Y=56.00 ; SAR Peak: 0.77 W/kg

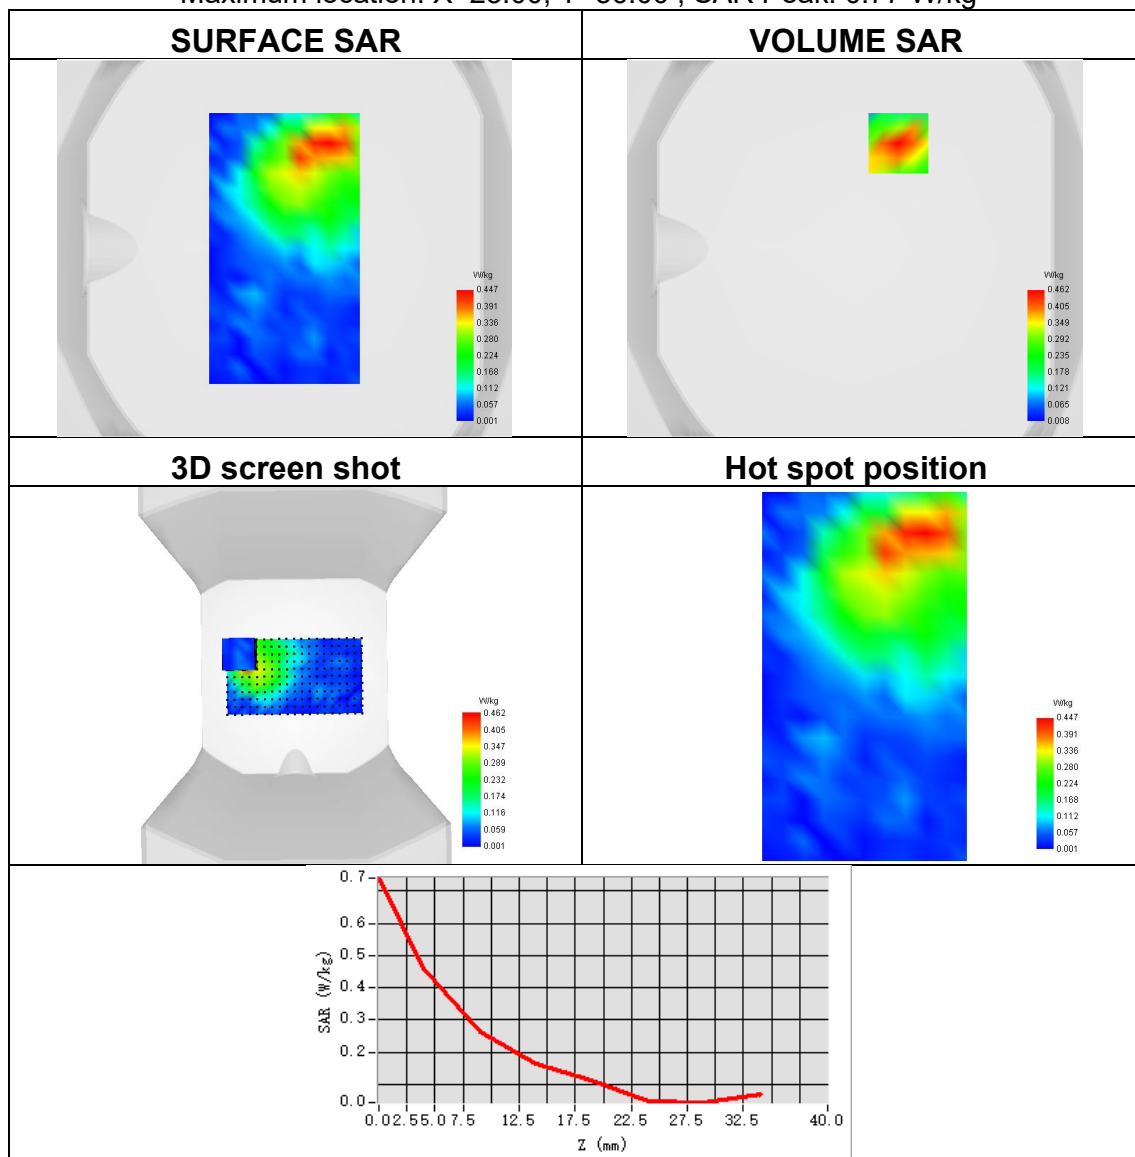




Plot 89:

Test Date	2024-08-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 38
Signal	NR TDD
Frequency	2595
SAR 10g (W/Kg)	0.269
SAR 1g (W/Kg)	0.561
ConvF	2.35
Relative permittivity	39.44
Conductivity (S/m)	1.93

Maximum location: X=-23.00, Y=-7.00 ; SAR Peak: 1.01 W/kg

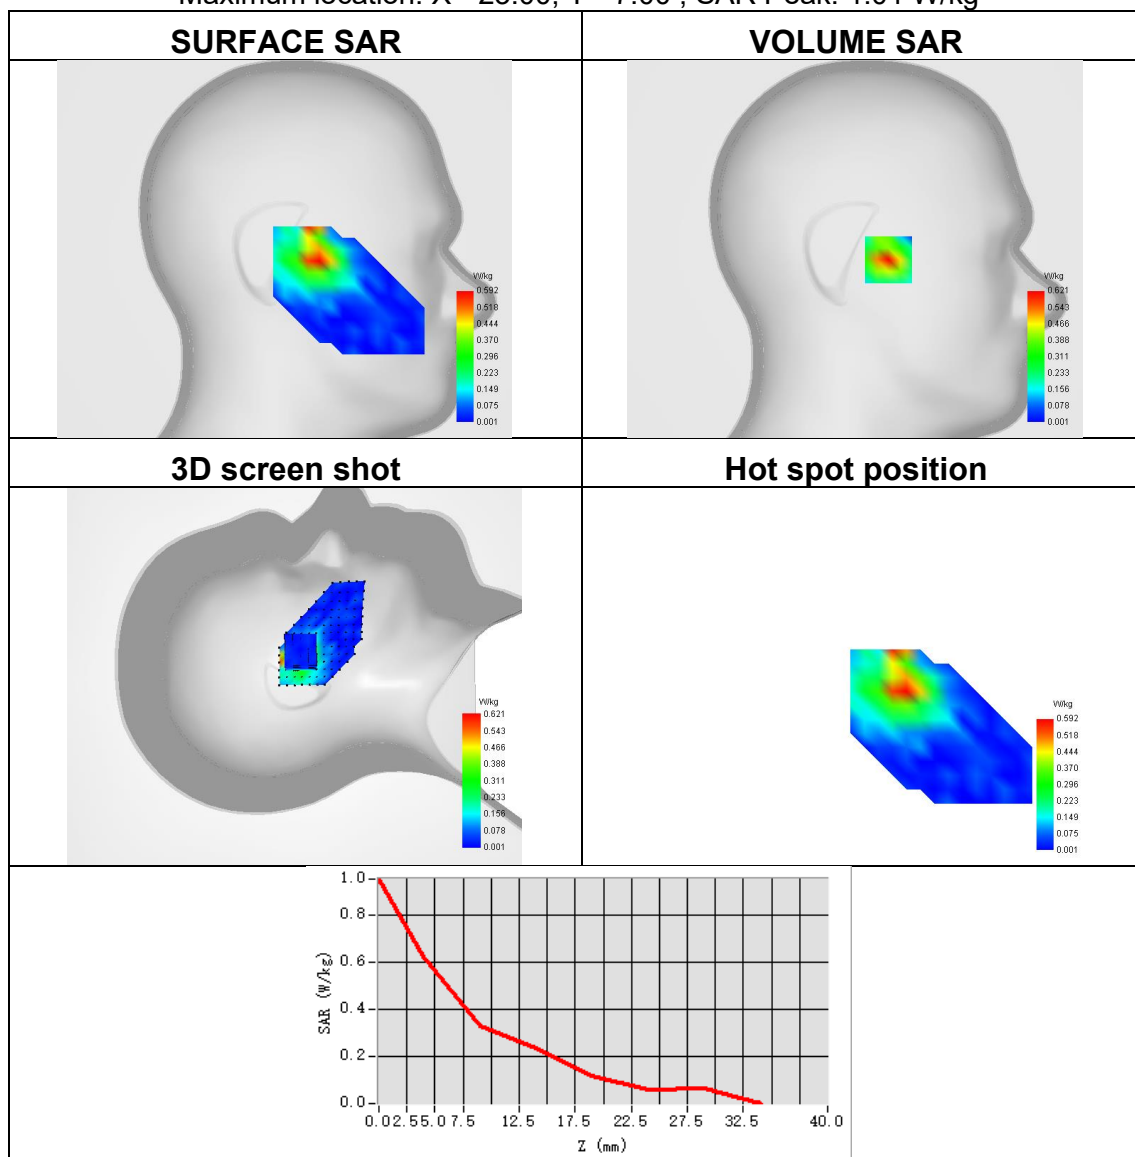




Plot 90:

Test Date	2024-08-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 38
Signal	NR TDD
Frequency	2595
SAR 10g (W/Kg)	0.108
SAR 1g (W/Kg)	0.216
ConvF	2.35
Relative permittivity	39.44
Conductivity (S/m)	1.93

Maximum location: X=1.00, Y=39.00 ; SAR Peak: 0.43 W/kg

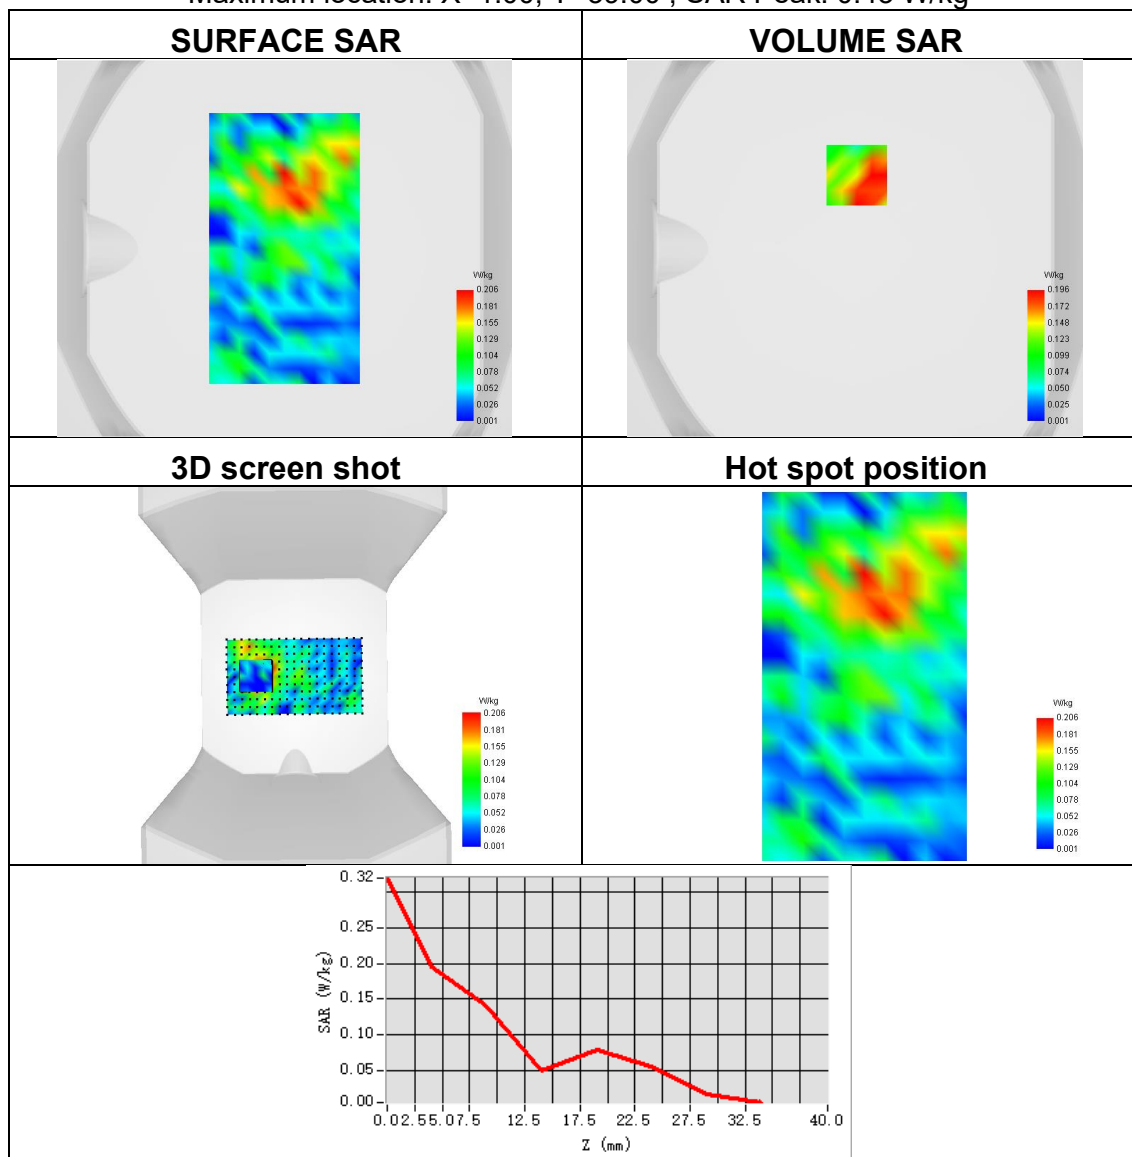




Plot 91:

Test Date	2024-08-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 41
Signal	NR TDD
Frequency	2593
SAR 10g (W/Kg)	0.205
SAR 1g (W/Kg)	0.466
ConvF	2.35
Relative permittivity	39.47
Conductivity (S/m)	1.99

Maximum location: X=-30.00, Y=-10.00 ; SAR Peak: 0.86 W/kg

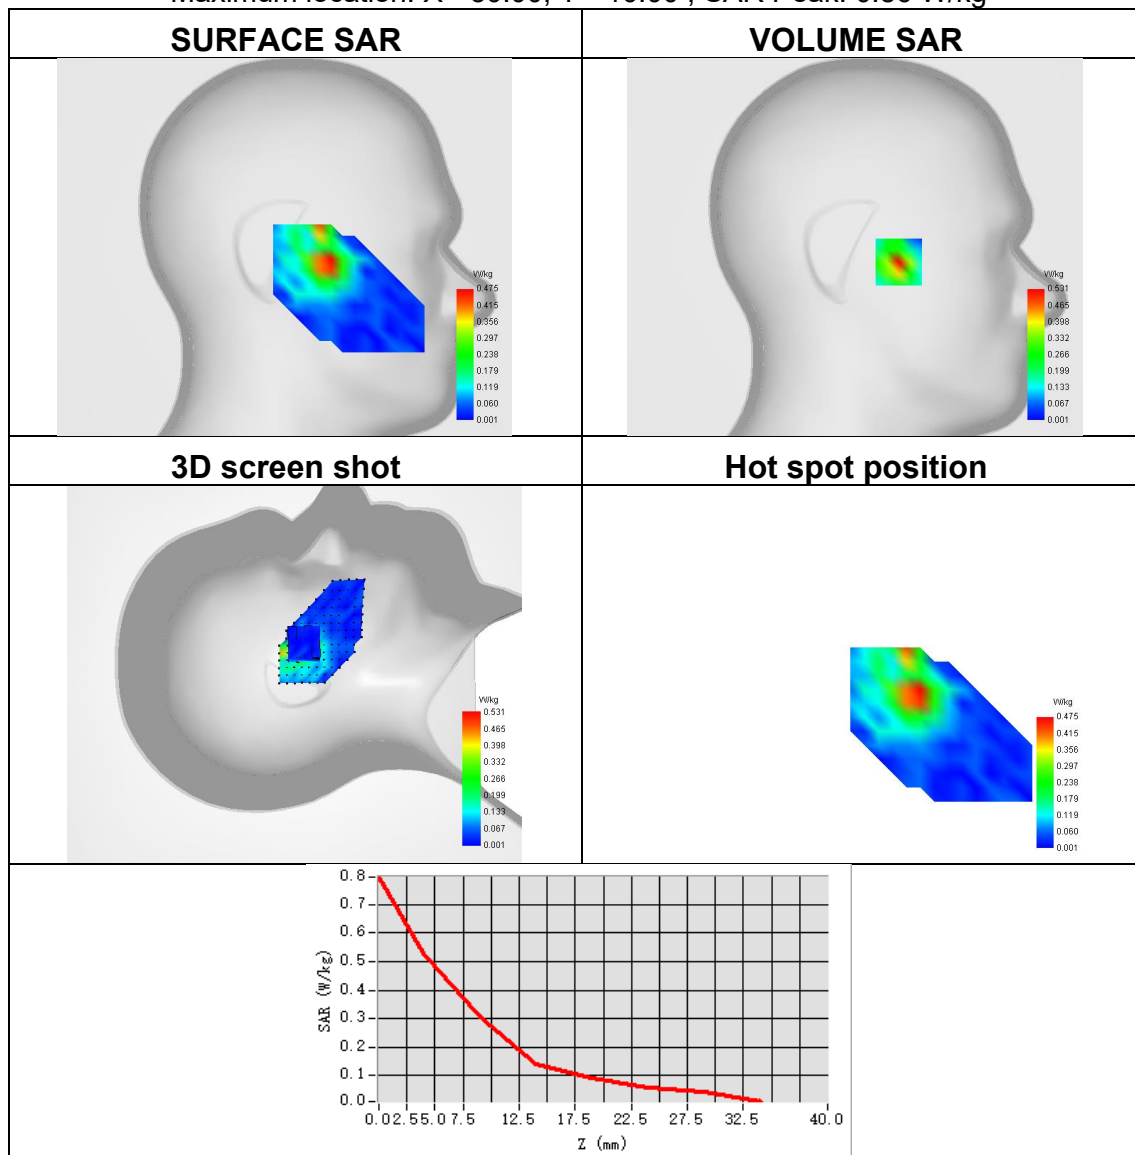




Plot 92:

Test Date	2024-08-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 41
Signal	NR TDD
Frequency	2593
SAR 10g (W/Kg)	0.093
SAR 1g (W/Kg)	0.199
ConvF	2.35
Relative permittivity	39.47
Conductivity (S/m)	1.99

Maximum location: X=13.00, Y=-11.00 ; SAR Peak: 0.44 W/kg

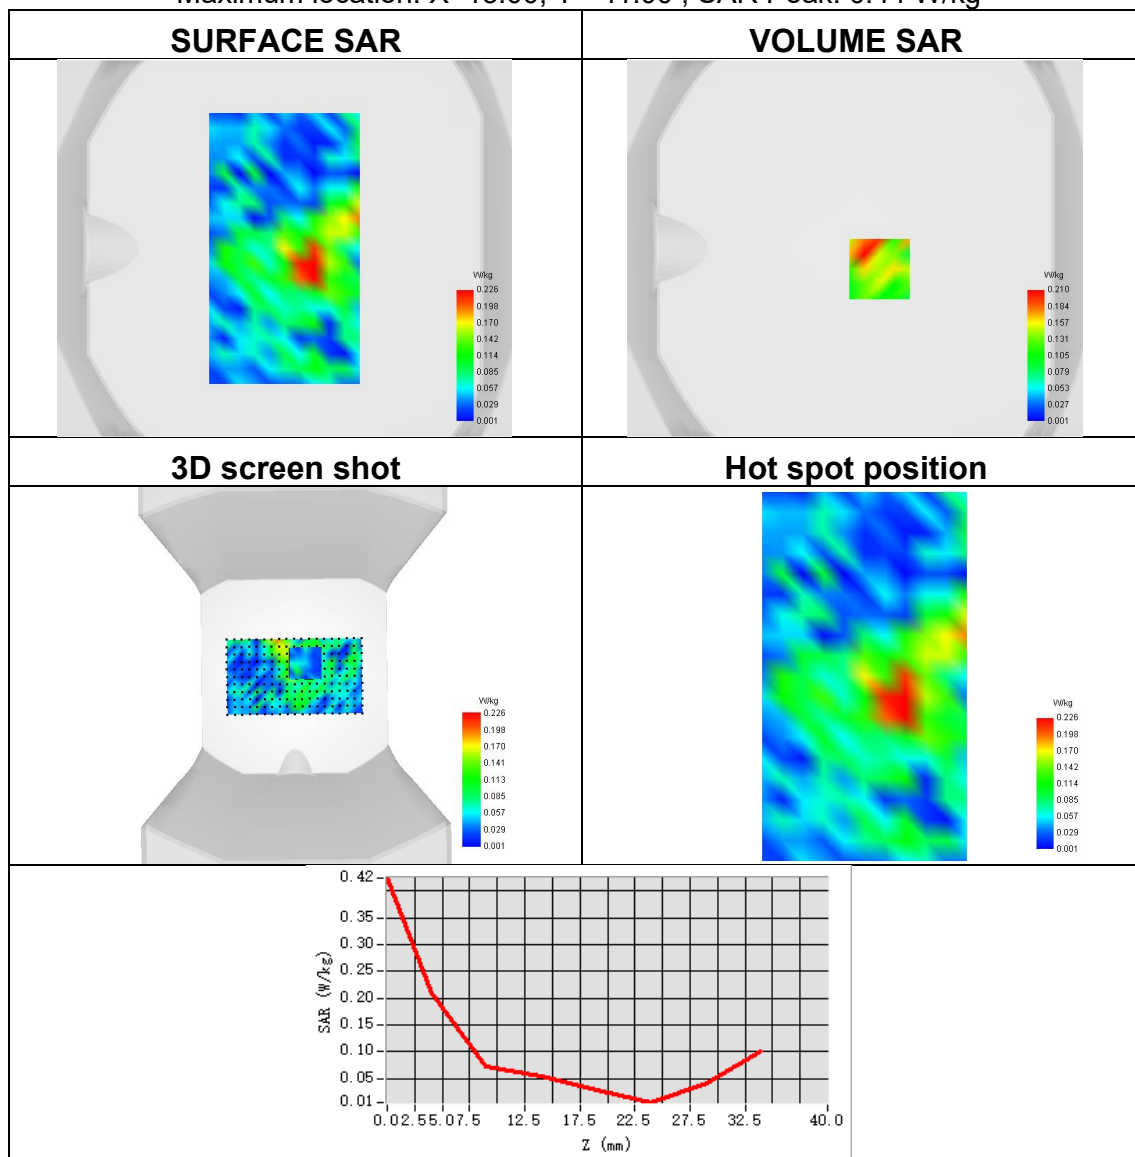




Plot 93:

Test Date	2024-08-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	NR band 66
Signal	NR FDD
Frequency	1712.5
SAR 10g (W/Kg)	0.163
SAR 1g (W/Kg)	0.298
ConvF	1.91
Relative permittivity	40.89
Conductivity (S/m)	1.42

Maximum location: X=-24.00, Y=-7.00 ; SAR Peak: 0.53 W/kg

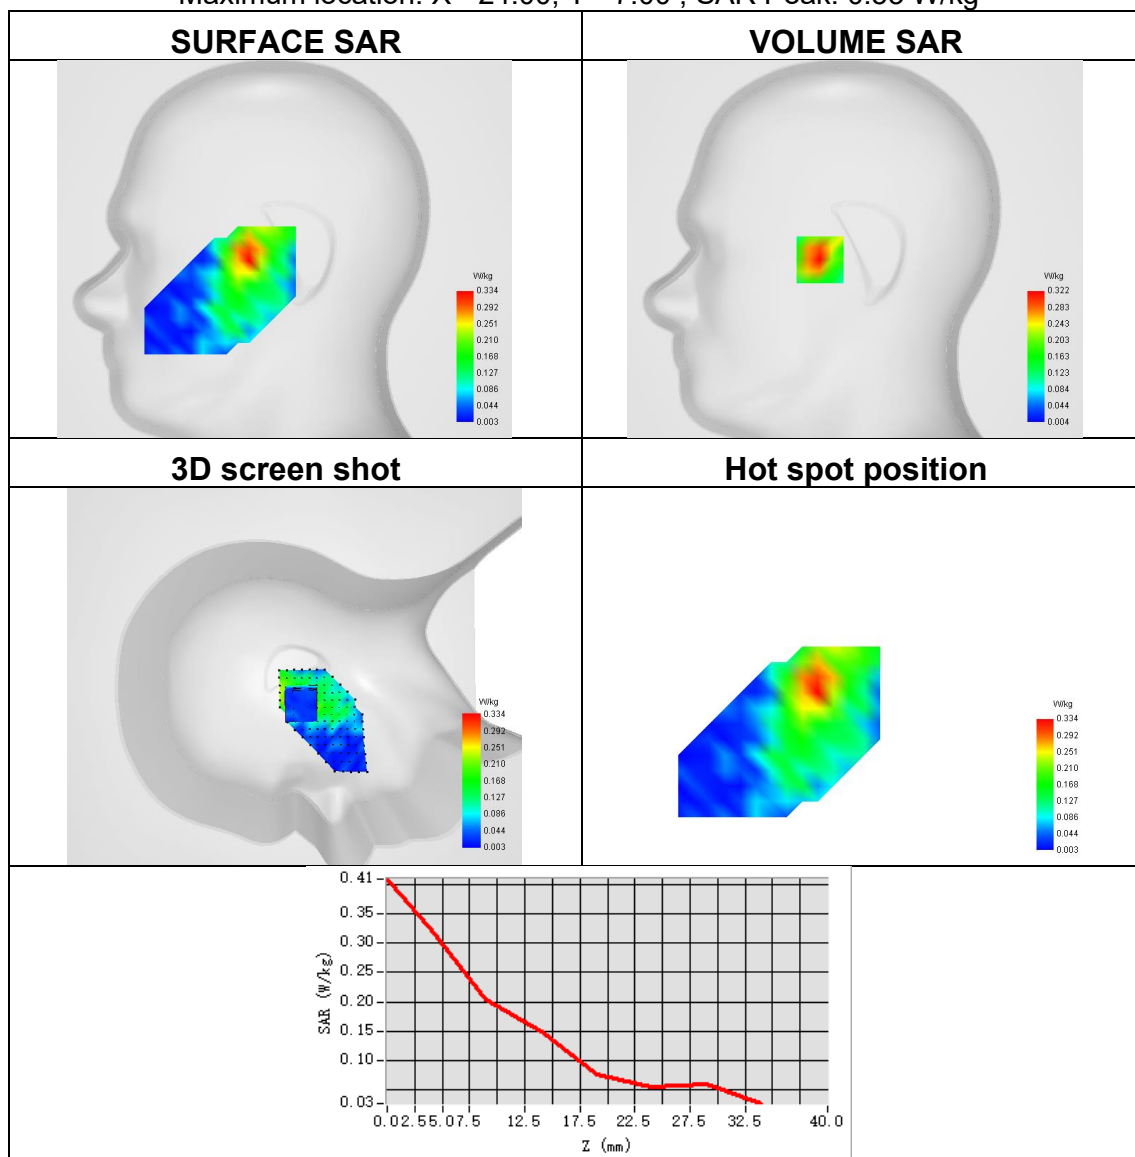




Plot 94:

Test Date	2024-08-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 66
Signal	NR FDD
Frequency	1712.5
SAR 10g (W/Kg)	0.233
SAR 1g (W/Kg)	0.431
ConvF	1.91
Relative permittivity	40.89
Conductivity (S/m)	1.42

Maximum location: X=-11.00, Y=3.00 ; SAR Peak: 0.79 W/kg

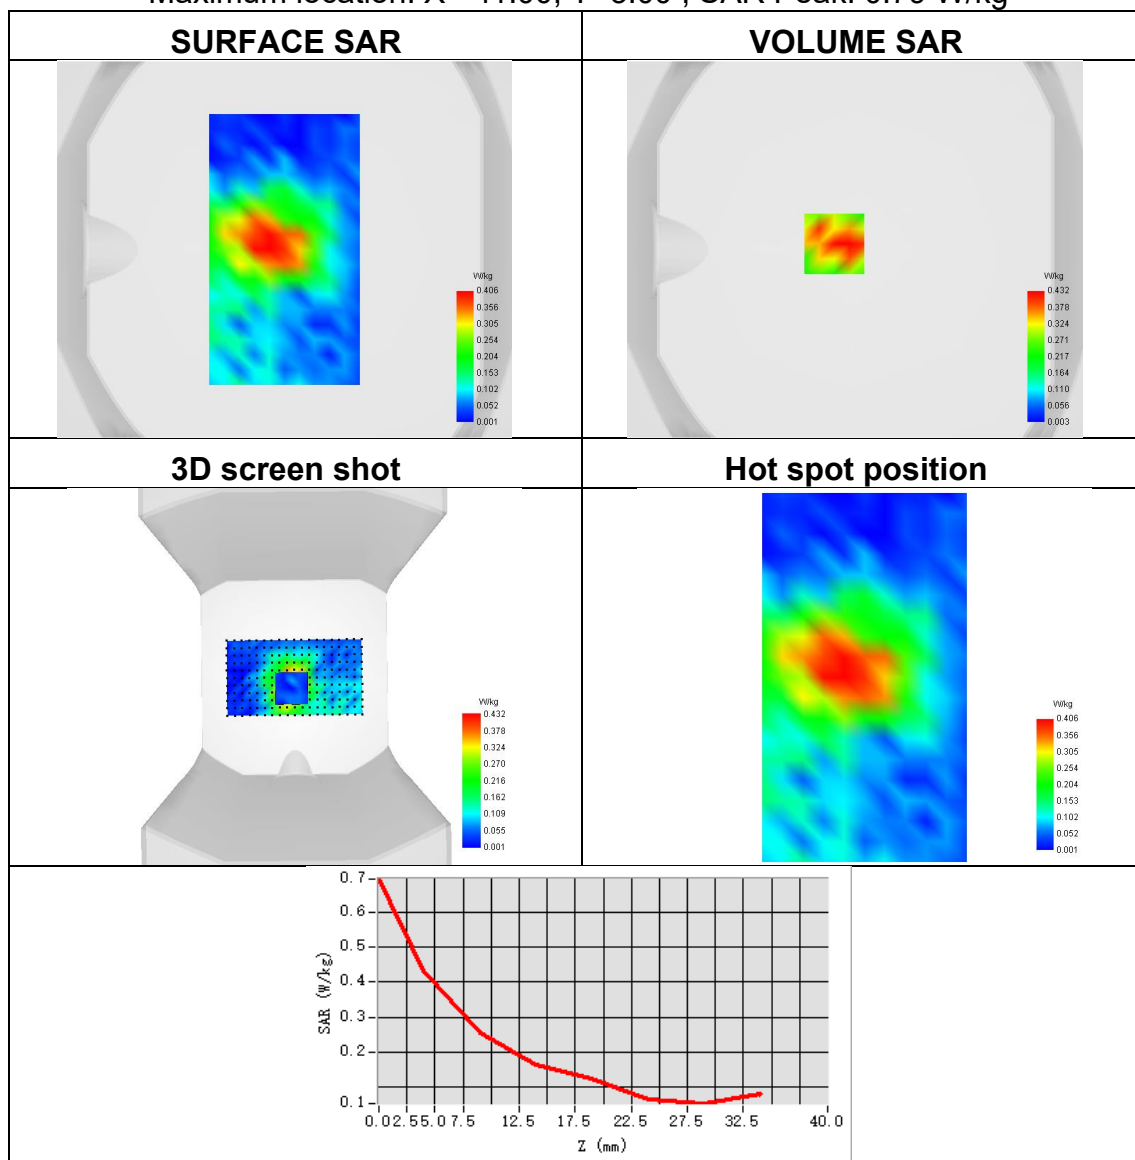




Plot 95:

Test Date	2024-08-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	NR band 77
Signal	NR TDD
Frequency	3750
SAR 10g (W/Kg)	0.048
SAR 1g (W/Kg)	0.105
ConvF	1.84
Relative permittivity	39.09
Conductivity (S/m)	3.20

Maximum location: X=-32.00, Y=-30.00 ; SAR Peak: 0.54 W/kg

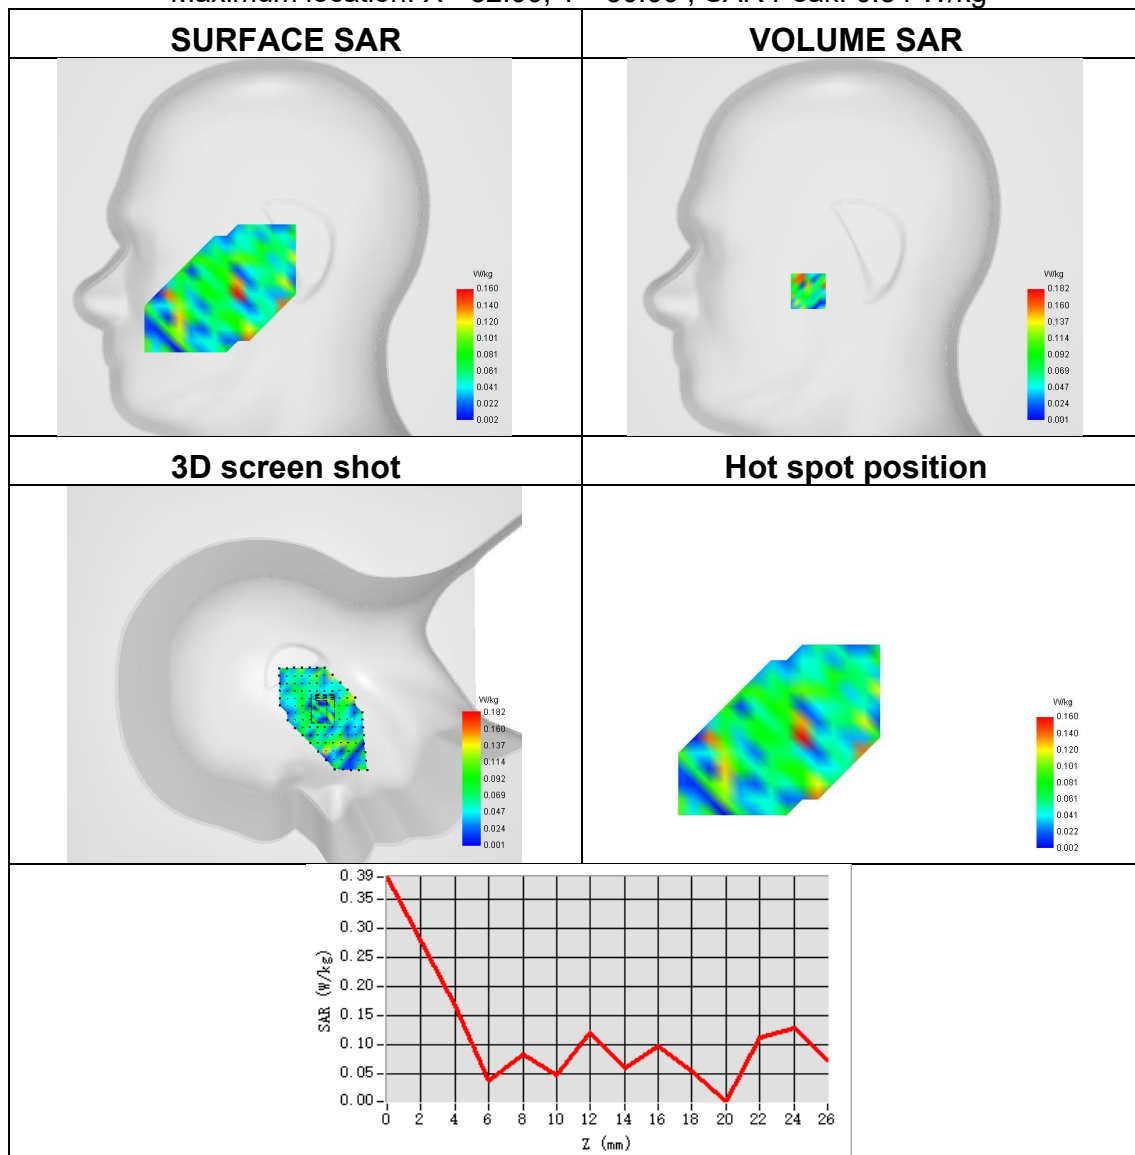




Plot 96:

Test Date	2024-08-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 77
Signal	NR TDD
Frequency	3750
SAR 10g (W/Kg)	0.163
SAR 1g (W/Kg)	0.438
ConvF	1.84
Relative permittivity	39.09
Conductivity (S/m)	3.20

Maximum location: X=23.00, Y=-7.00 ; SAR Peak: 1.20 W/kg

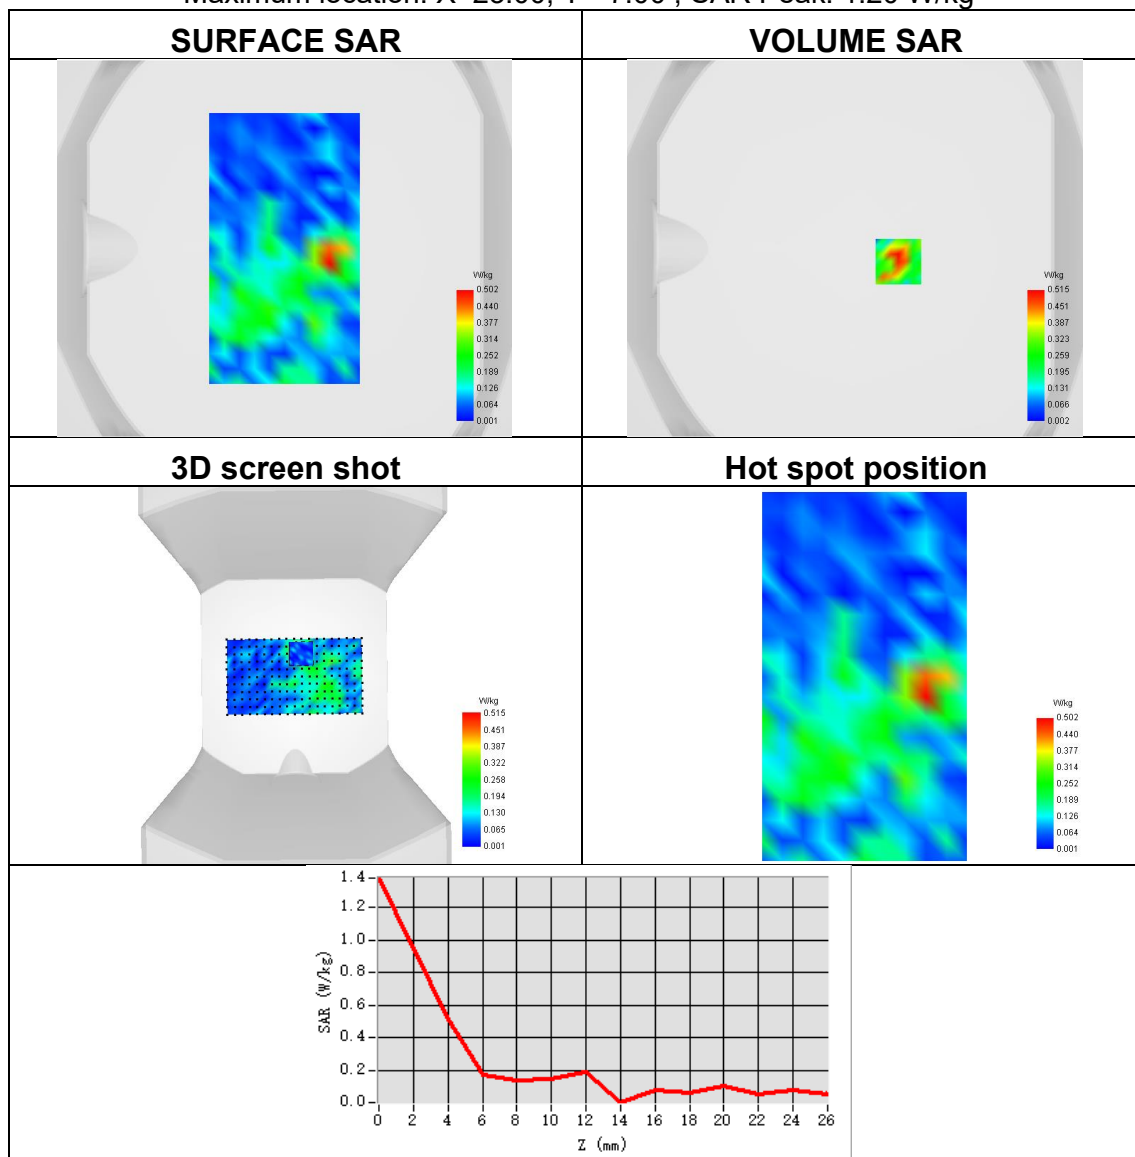




Plot 97:

Test Date	2024-08-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	NR band 78
Signal	NR TDD
Frequency	3500
SAR 10g (W/Kg)	0.027
SAR 1g (W/Kg)	0.060
ConvF	1.97
Relative permittivity	39.17
Conductivity (S/m)	2.96

Maximum location: X=-48.00, Y=-24.00 ; SAR Peak: 0.52 W/kg

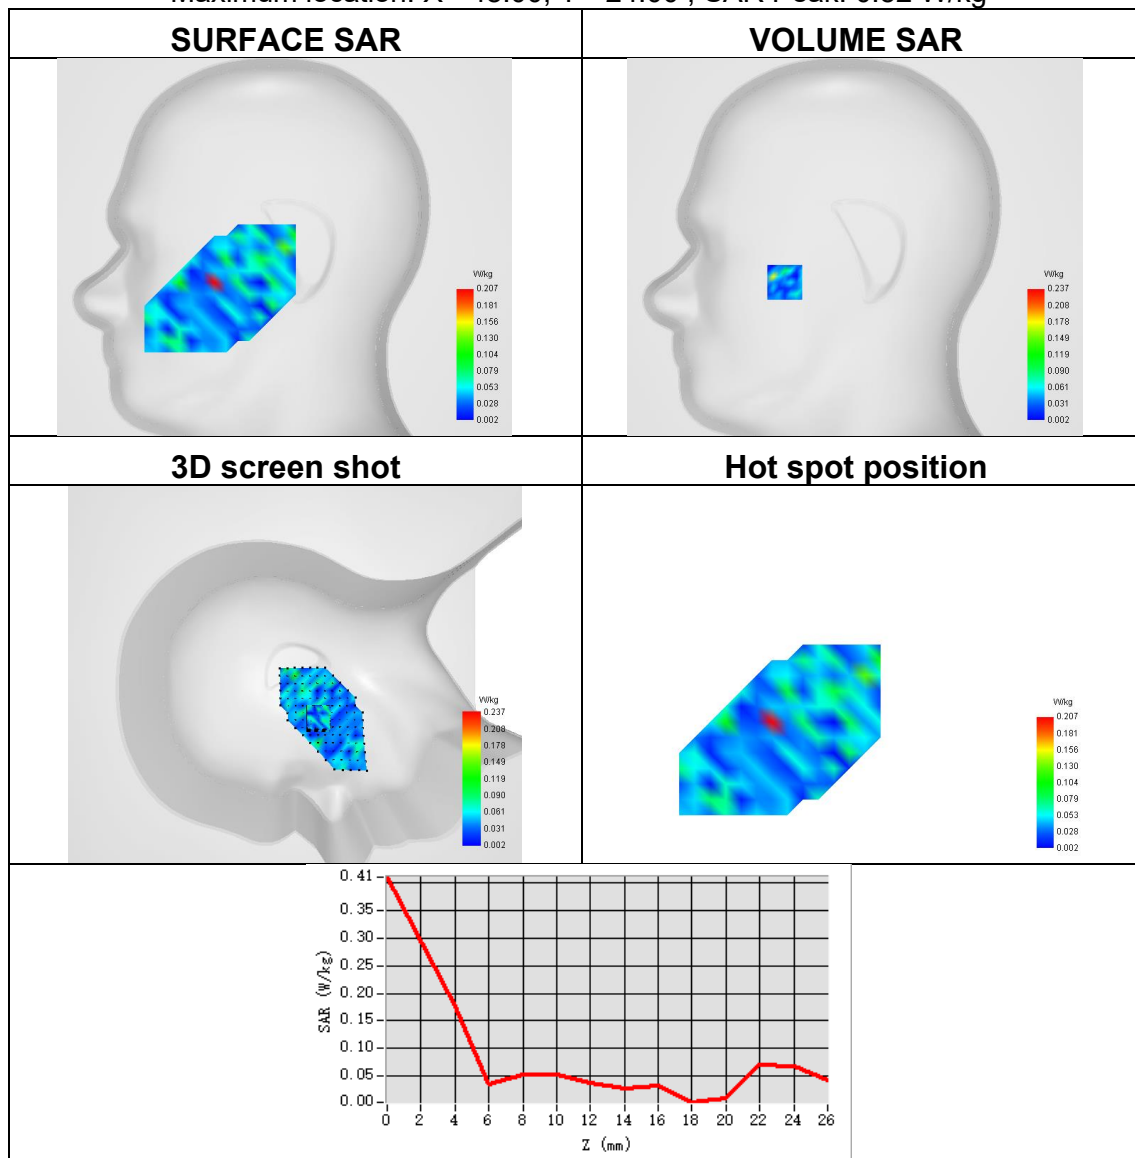




Plot 98:

Test Date	2024-08-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 78
Signal	NR TDD
Frequency	3500
SAR 10g (W/Kg)	0.346
SAR 1g (W/Kg)	0.828
ConvF	1.97
Relative permittivity	39.17
Conductivity (S/m)	2.96

Maximum location: X=24.00, Y=7.00 ; SAR Peak: 1.79 W/kg

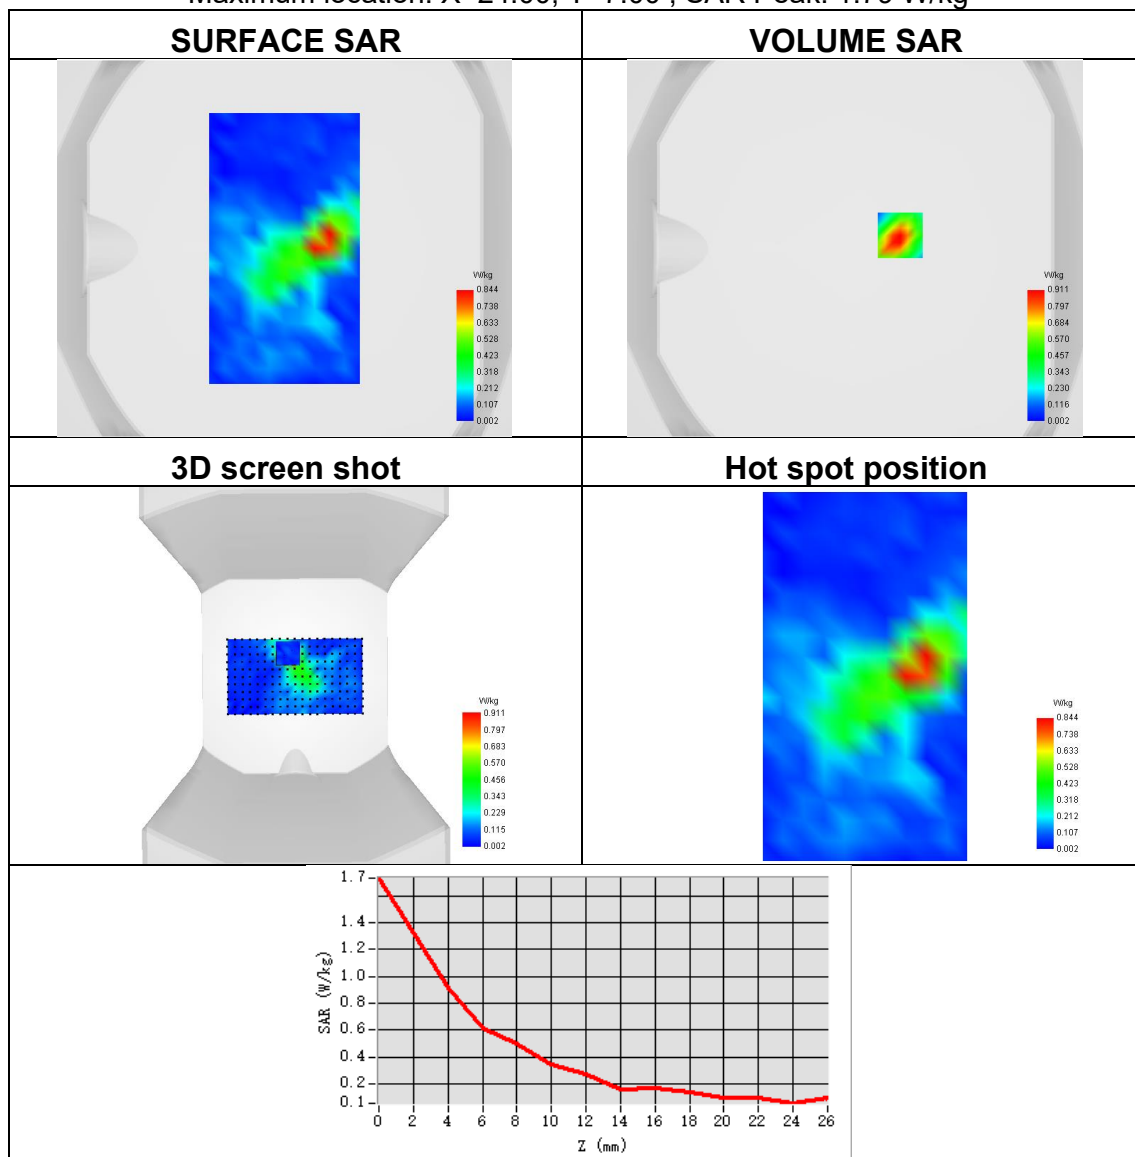



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※