




Plot 22:

Test Date	2025-09-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5180
SAR 10g (W/Kg)	0.044
SAR 1g (W/Kg)	0.099
ConvF	1.58
Relative permittivity	37.02
Conductivity (S/m)	4.67

Maximum location: X=16.00, Y=-16.00 ; SAR Peak: 0.40 W/kg

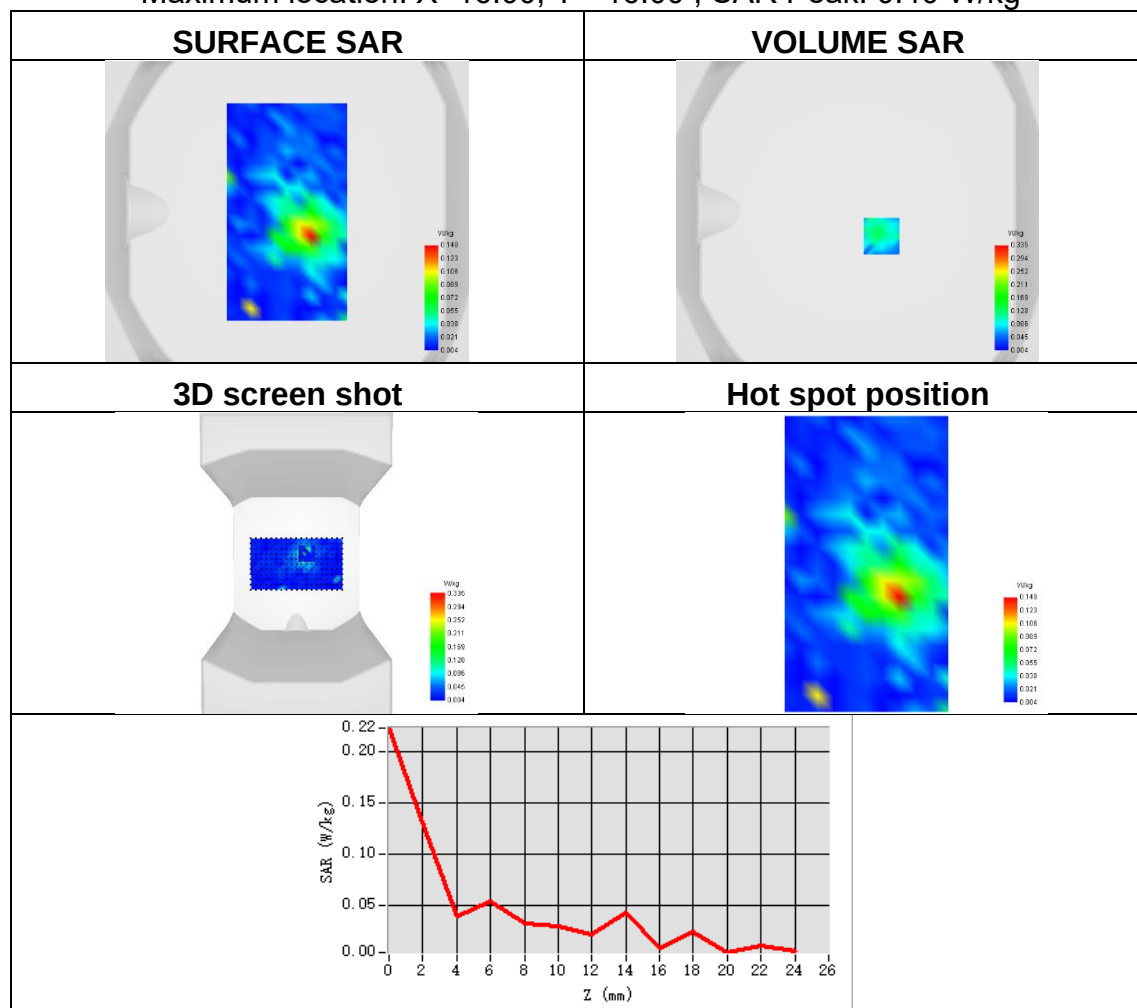




Plot 23:

Test Date	2025-09-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-1
Signal	IEEE 802.11ac
Frequency	5230
SAR 10g (W/Kg)	0.015
SAR 1g (W/Kg)	0.043
ConvF	1.58
Relative permittivity	37.02
Conductivity (S/m)	4.67

Maximum location: X=-32.00, Y=-24.00 ; SAR Peak: 0.38 W/kg

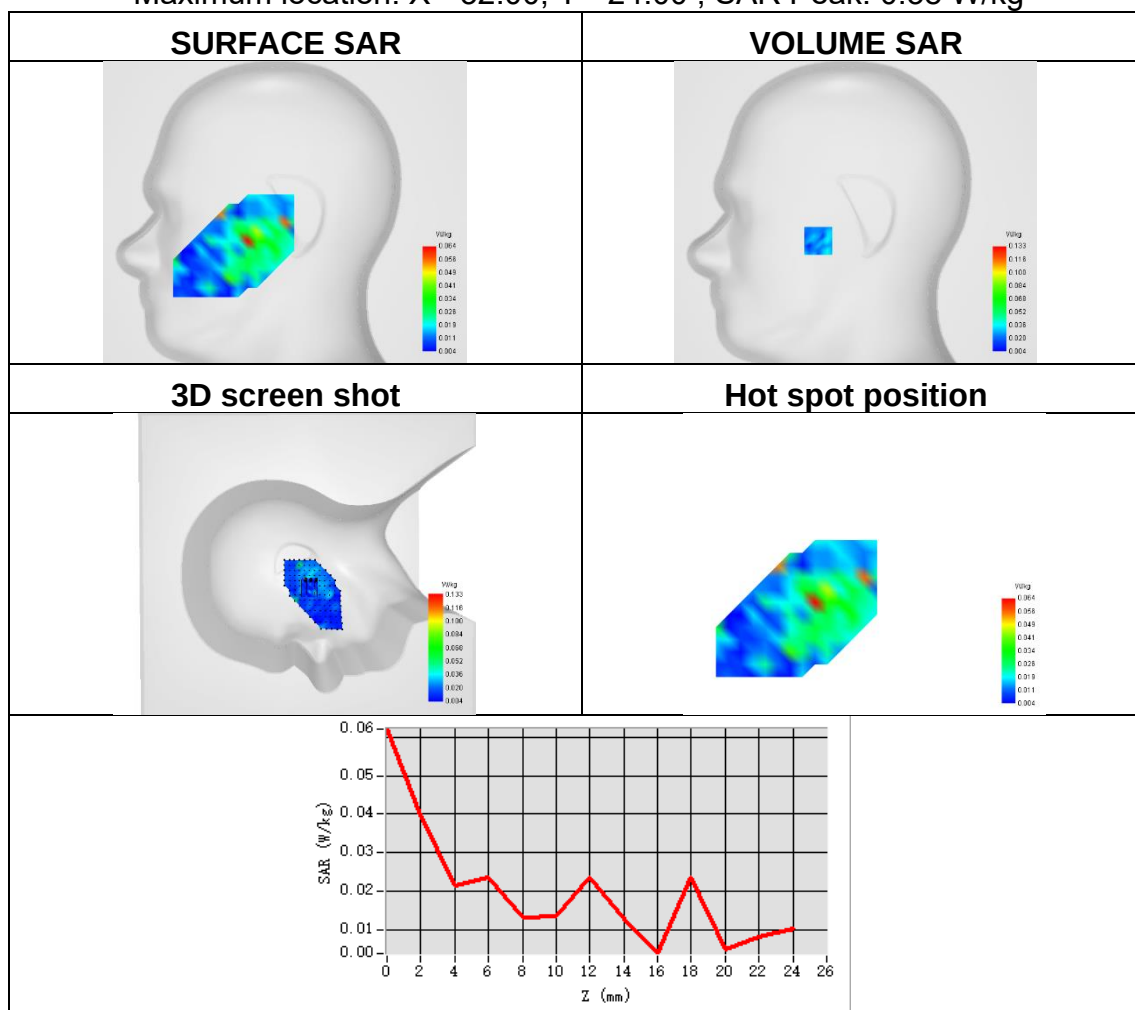




Plot 24:

Test Date	2025-09-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1
Signal	IEEE 802.11ac
Frequency	5230
SAR 10g (W/Kg)	0.015
SAR 1g (W/Kg)	0.050
ConvF	1.58
Relative permittivity	37.02
Conductivity (S/m)	4.67

Maximum location: X=8.00, Y=-32.00 ; SAR Peak: 0.68 W/kg

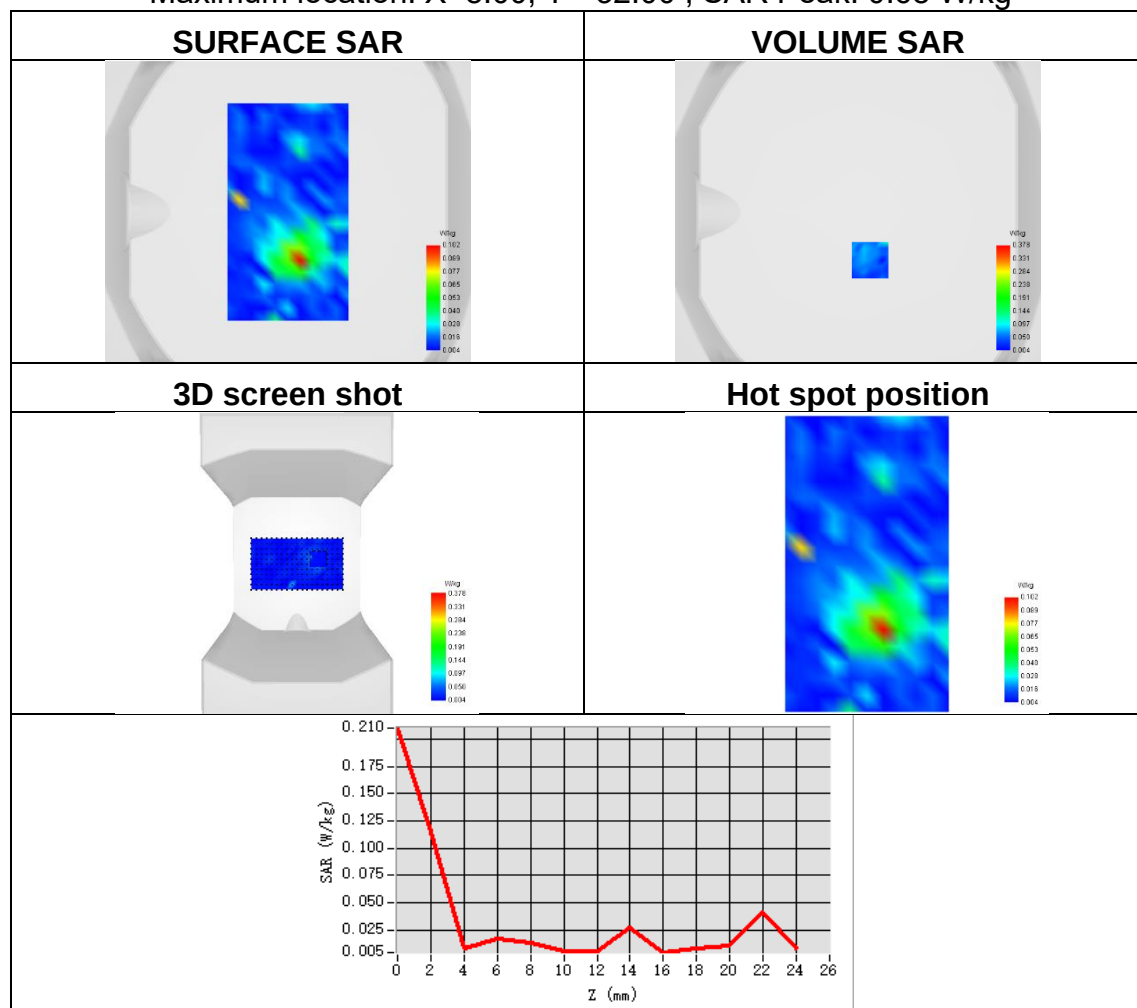




Plot 25:

Test Date	2025-09-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-1
Signal	IEEE 802.11ac
Frequency	5180
SAR 10g (W/Kg)	0.084
SAR 1g (W/Kg)	0.279
ConvF	1.58
Relative permittivity	37.02
Conductivity (S/m)	4.67

Maximum location: X=-16.00, Y=-21.00 ; SAR Peak: 1.33 W/kg

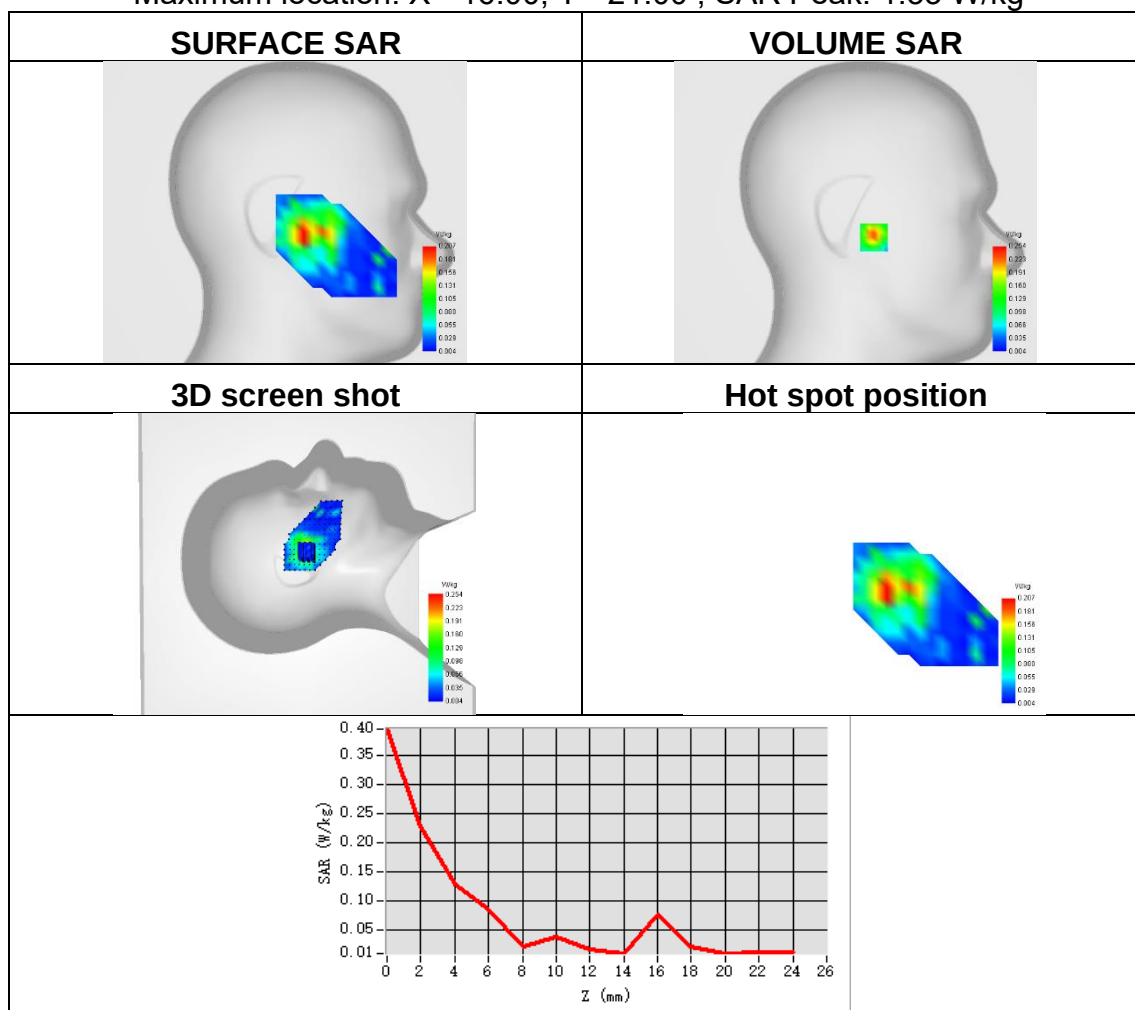




Plot 26:

Test Date	2025-09-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1
Signal	IEEE 802.11ac
Frequency	5230
SAR 10g (W/Kg)	0.173
SAR 1g (W/Kg)	0.328
ConvF	1.58
Relative permittivity	37.02
Conductivity (S/m)	4.67

Maximum location: X=16.00, Y=-35.00 ; SAR Peak: 1.17 W/kg

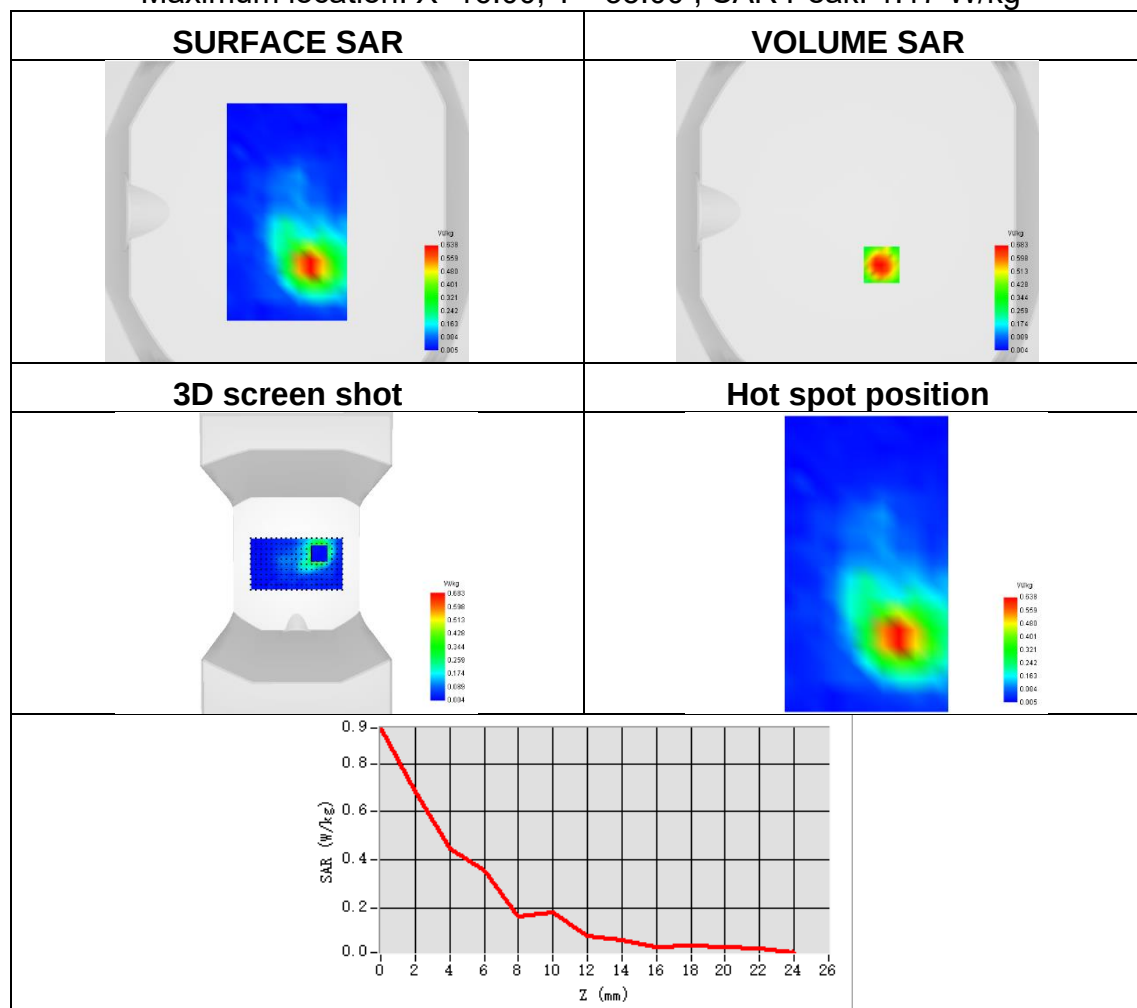




Plot 27:

Test Date	2025-09-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-2a
Signal	IEEE 802.11a
Frequency	5260
SAR 10g (W/Kg)	0.016
SAR 1g (W/Kg)	0.052
ConvF	1.60
Relative permittivity	36.08
Conductivity (S/m)	4.87

Maximum location: X=-40.00, Y=-23.00 ; SAR Peak: 0.51 W/kg

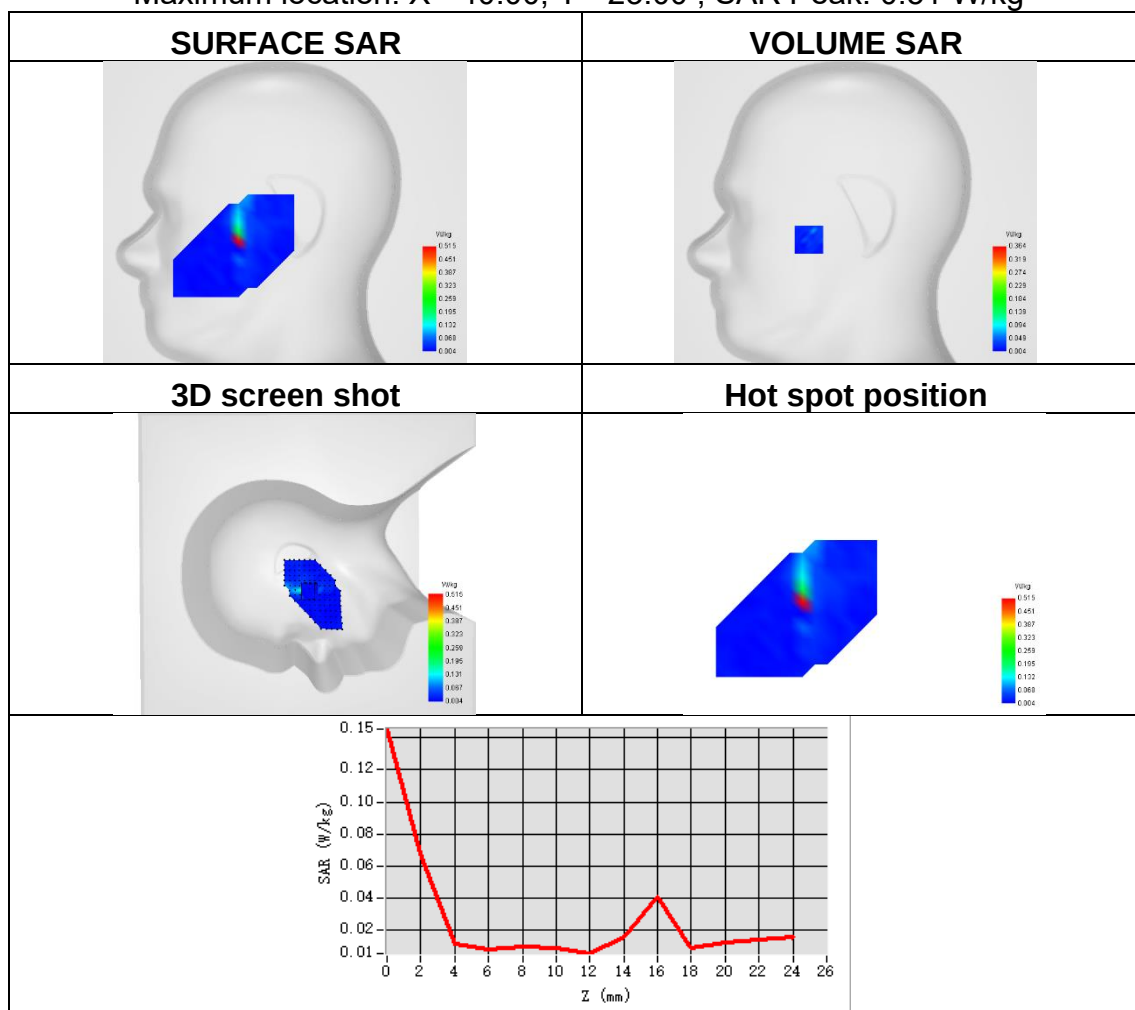




Plot 28:

Test Date	2025-09-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Left Side
Band	U-NII-2a
Signal	IEEE 802.11a
Frequency	5260
SAR 10g (W/Kg)	0.039
SAR 1g (W/Kg)	0.094
ConvF	1.60
Relative permittivity	36.08
Conductivity (S/m)	4.87

Maximum location: X=0.00, Y=-17.00 ; SAR Peak: 0.38 W/kg

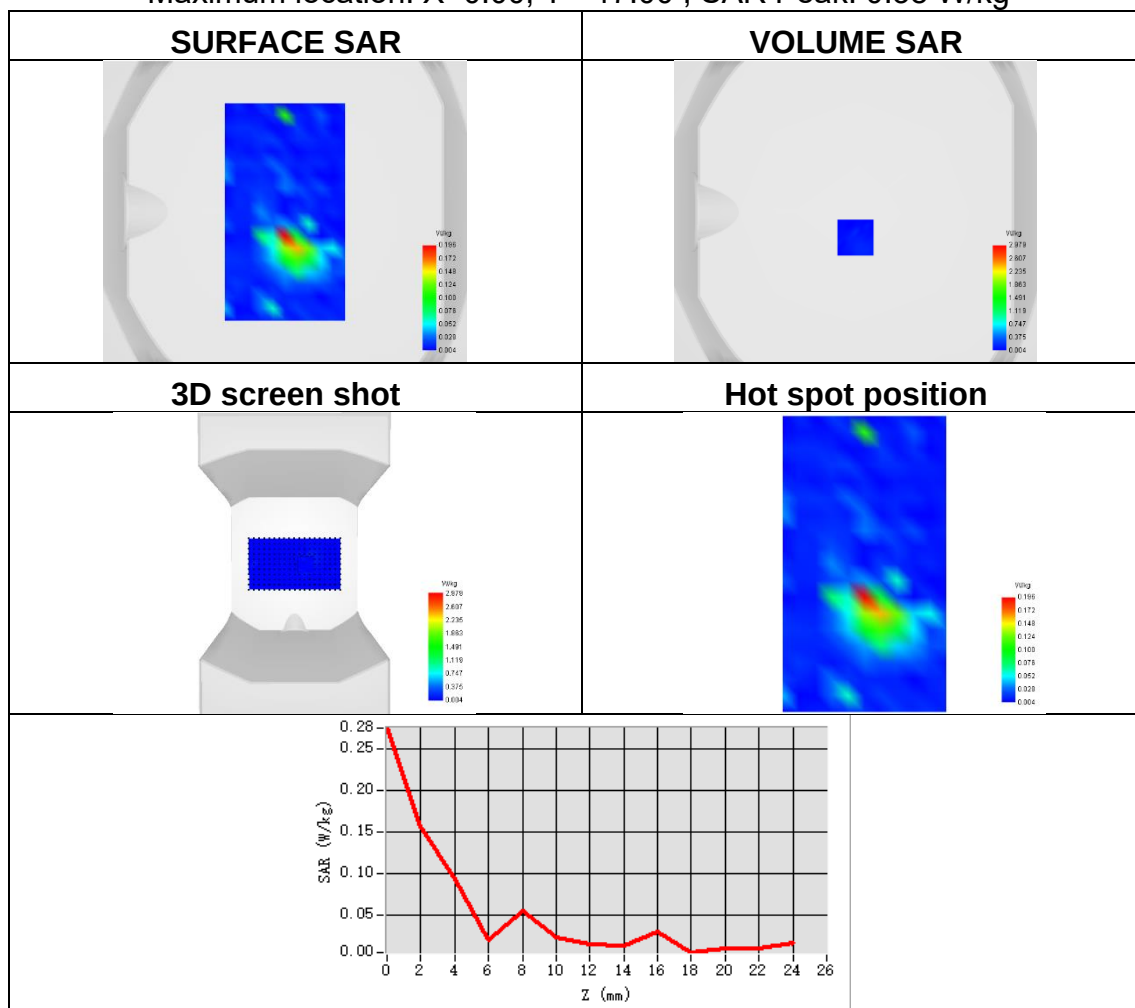




Plot 29:

Test Date	2025-09-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5300
SAR 10g (W/Kg)	0.053
SAR 1g (W/Kg)	0.142
ConvF	1.60
Relative permittivity	36.08
Conductivity (S/m)	4.87

Maximum location: X=-9.00, Y=-7.00 ; SAR Peak: 0.44 W/kg

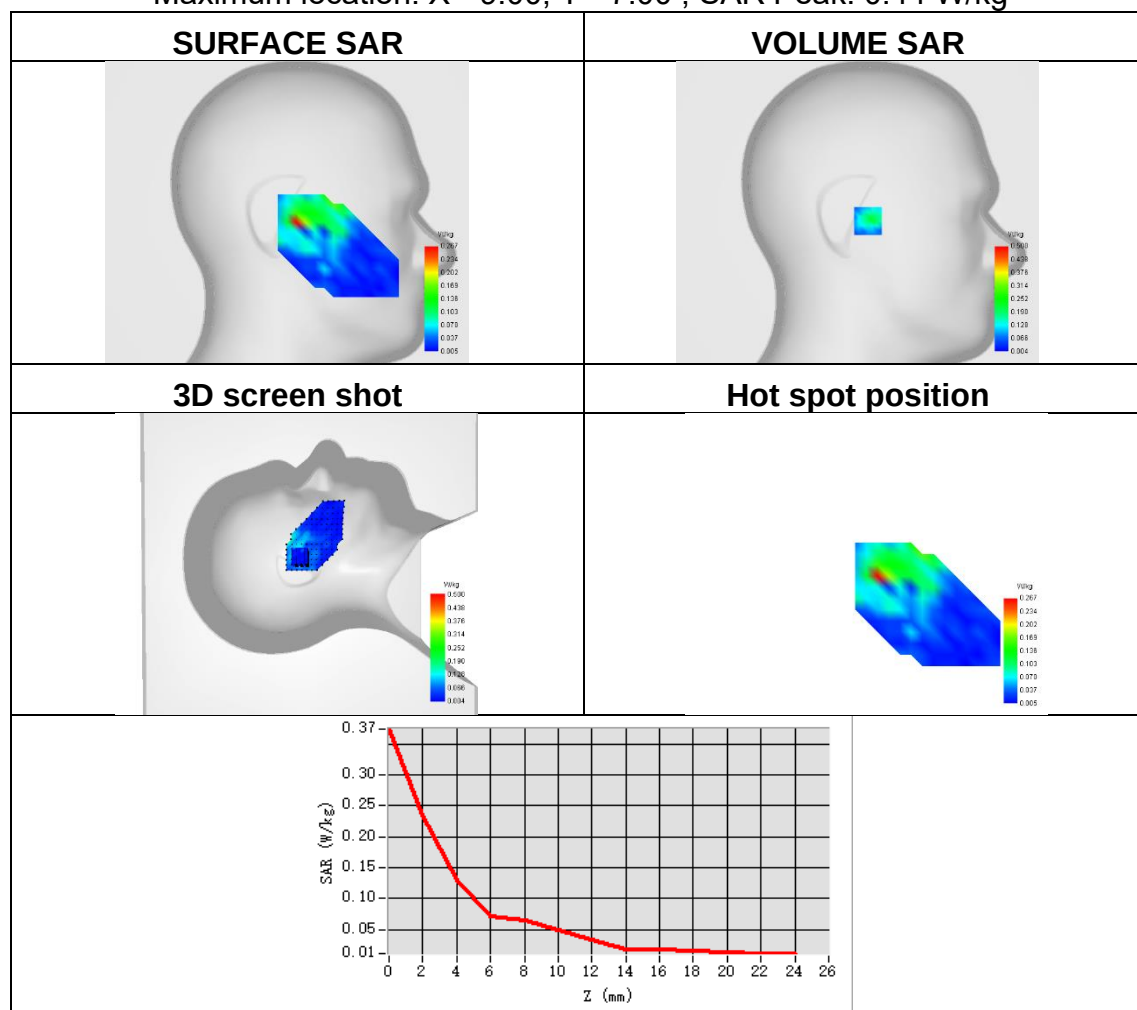




Plot 30:

Test Date	2025-09-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5300
SAR 10g (W/Kg)	0.062
SAR 1g (W/Kg)	0.207
ConvF	1.60
Relative permittivity	36.08
Conductivity (S/m)	4.87

Maximum location: X=14.00, Y=-22.00 ; SAR Peak: 1.45 W/kg

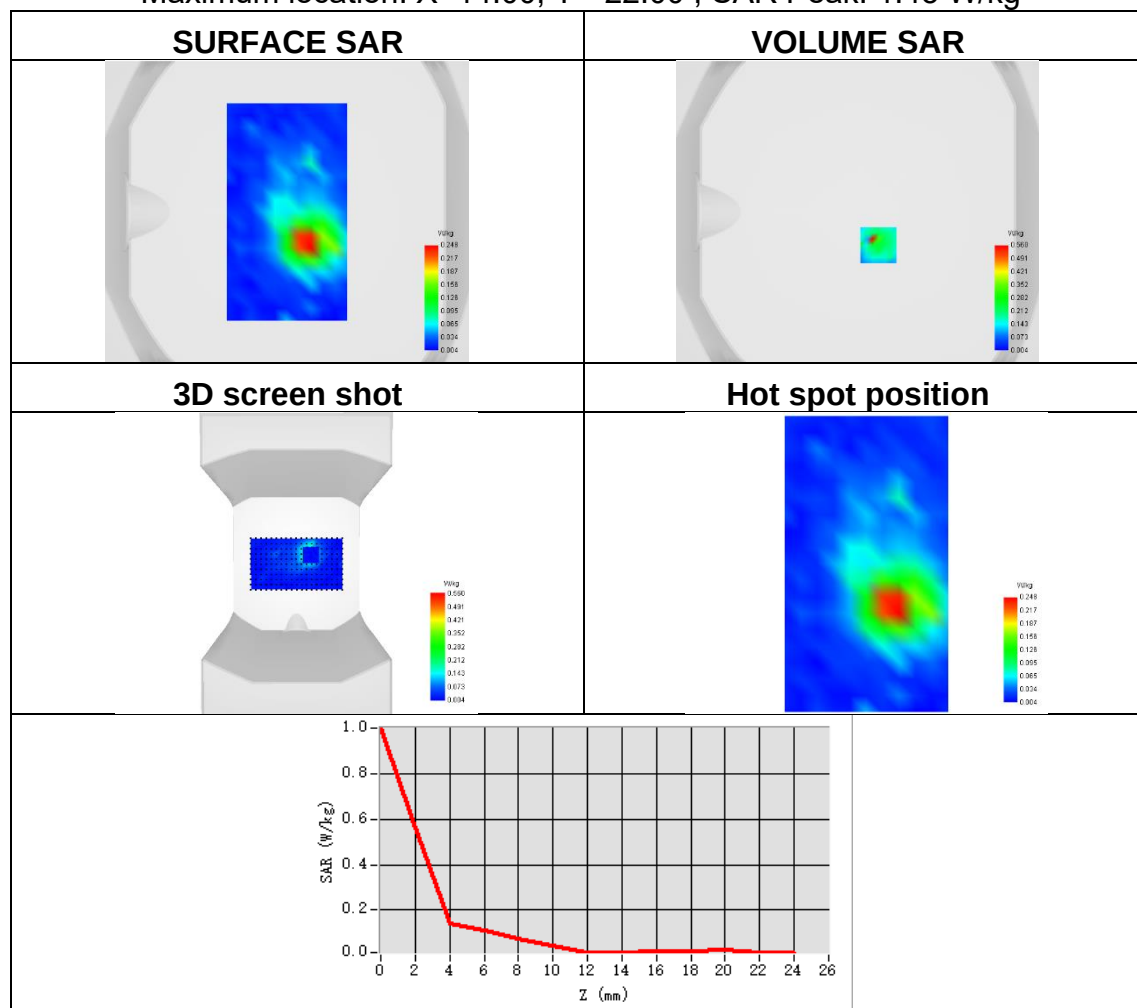




Plot 31:

Test Date	2025-09-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-1
Signal	IEEE 802.11ac
Frequency	5260
SAR 10g (W/Kg)	0.022
SAR 1g (W/Kg)	0.087
ConvF	1.60
Relative permittivity	36.08
Conductivity (S/m)	4.87

Maximum location: X=-24.00, Y=0.00 ; SAR Peak: 1.13 W/kg

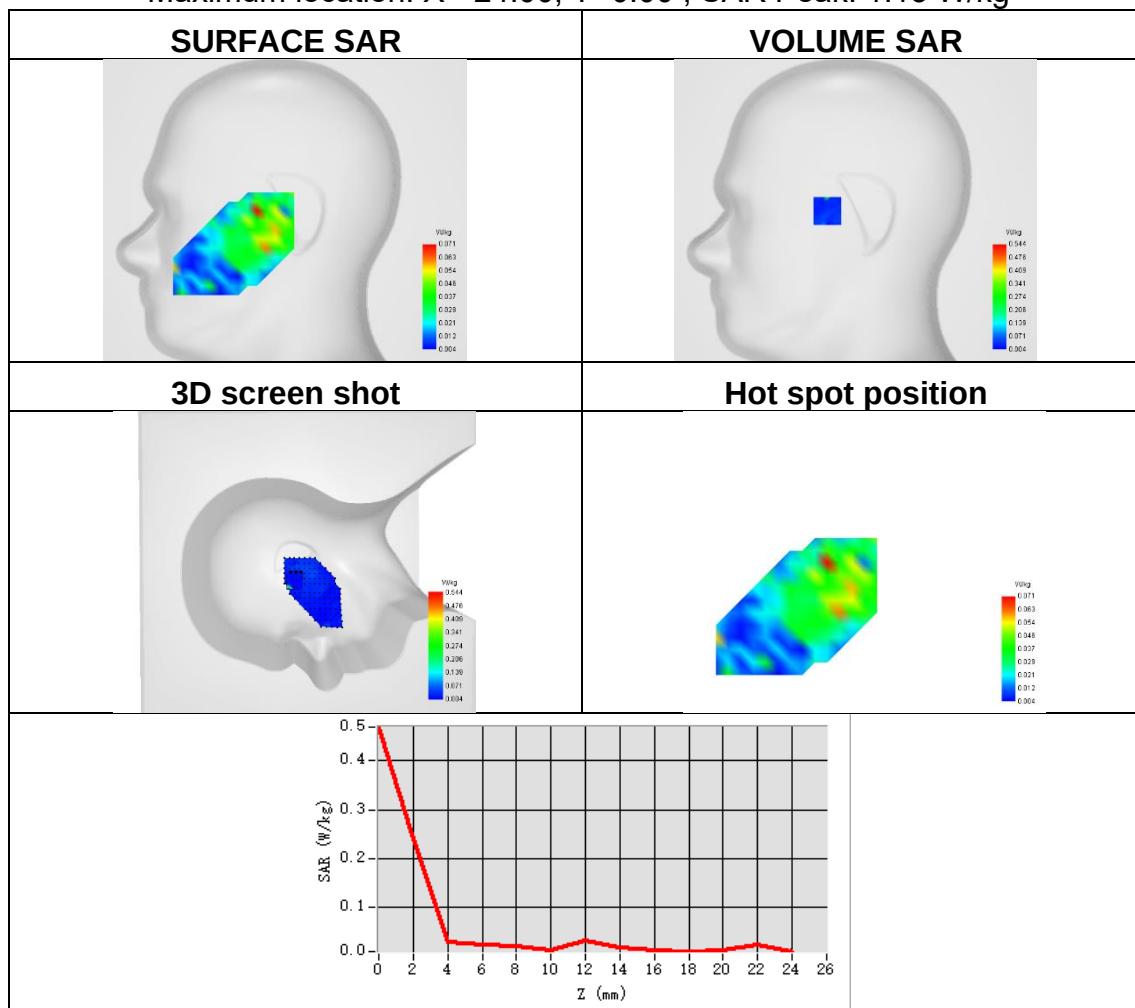




Plot 32:

Test Date	2025-09-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1
Signal	IEEE 802.11ac
Frequency	5260
SAR 10g (W/Kg)	0.056
SAR 1g (W/Kg)	0.118
ConvF	1.60
Relative permittivity	36.08
Conductivity (S/m)	4.87

Maximum location: X=10.00, Y=-18.00 ; SAR Peak: 1.14 W/kg

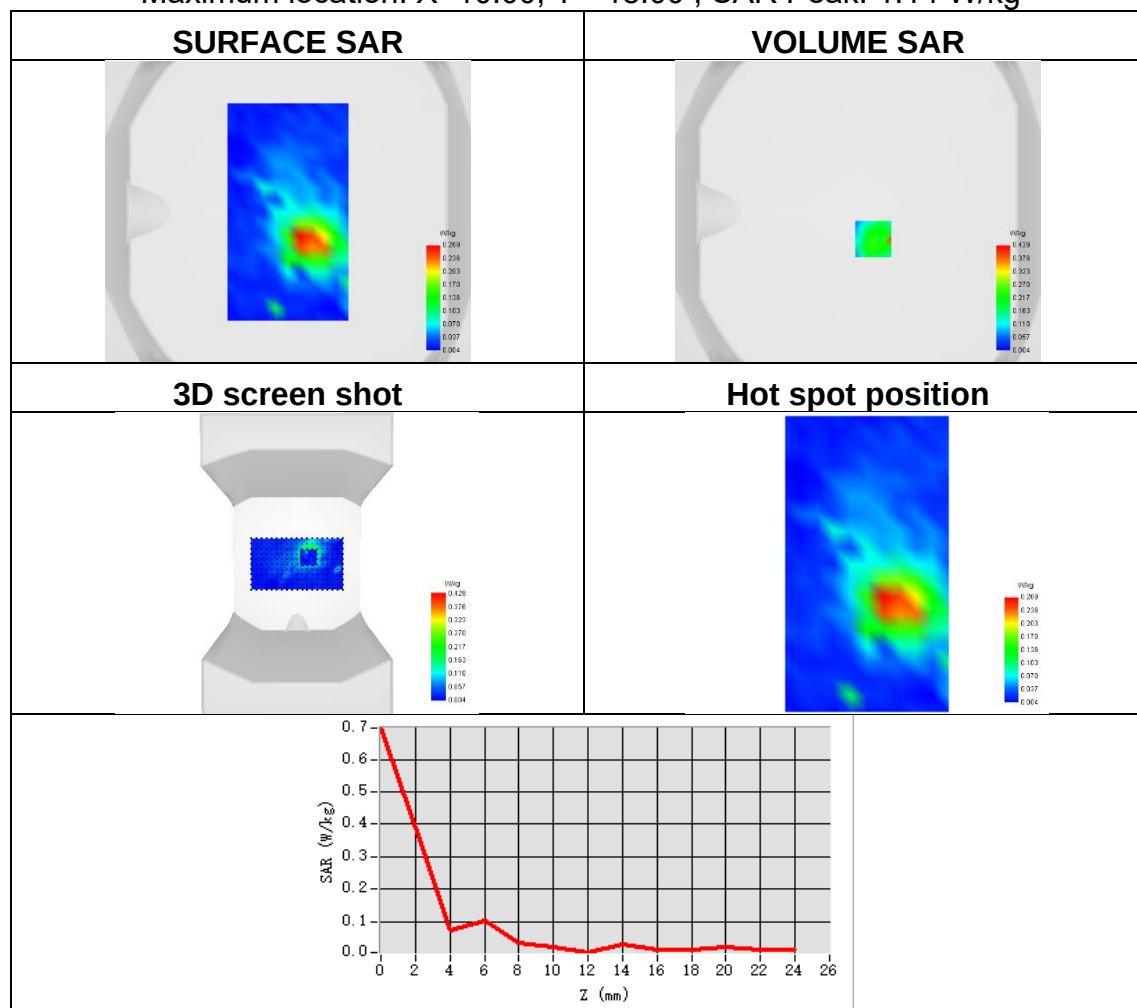




Plot 33:

Test Date	2025-09-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-2a
Signal	IEEE 802.11ac
Frequency	5260
SAR 10g (W/Kg)	0.033
SAR 1g (W/Kg)	0.115
ConvF	1.60
Relative permittivity	36.08
Conductivity (S/m)	4.87

Maximum location: X=-8.00, Y=8.00 ; SAR Peak: 0.57 W/kg

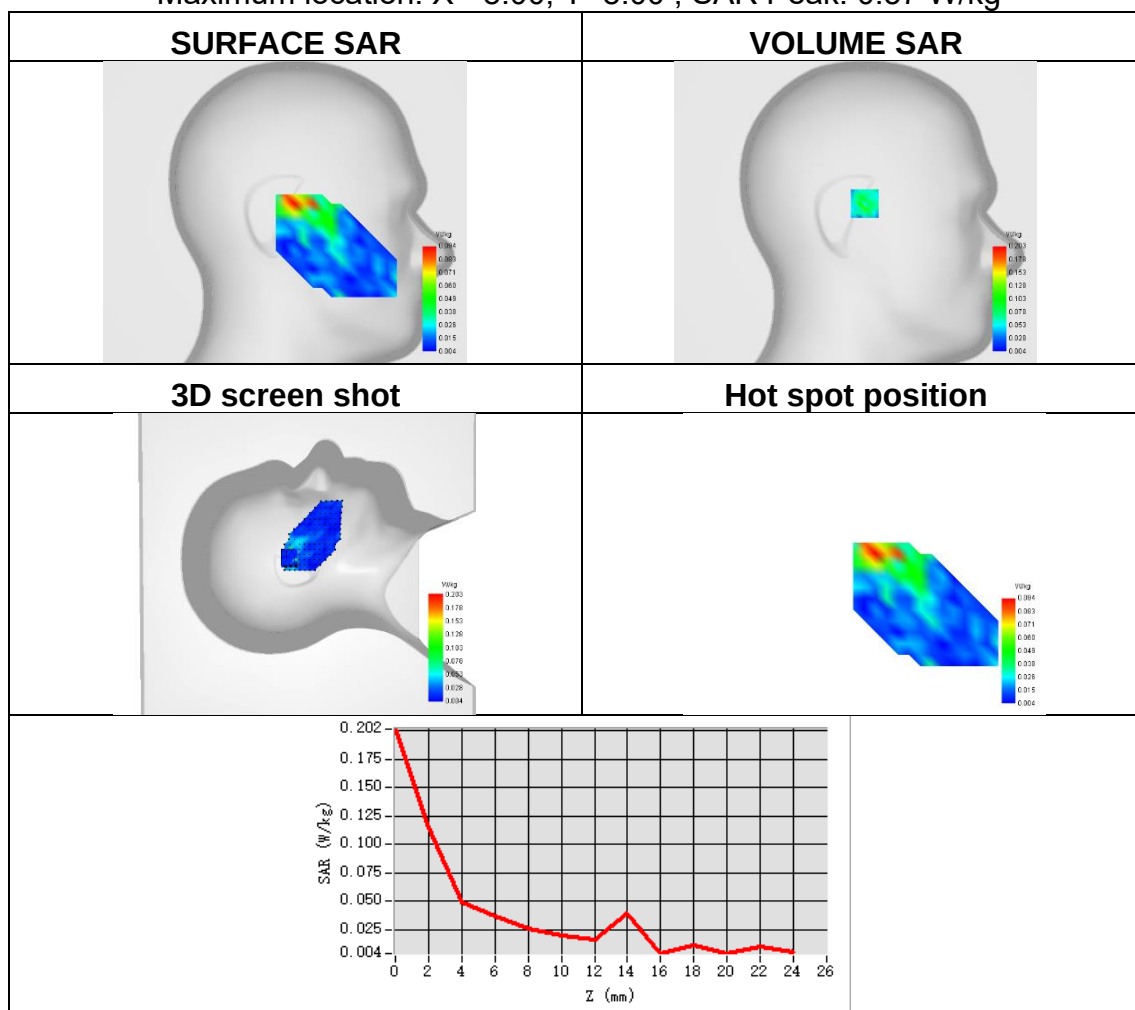




Plot 34:

Test Date	2025-09-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-2a
Signal	IEEE 802.11ac
Frequency	5260
SAR 10g (W/Kg)	0.163
SAR 1g (W/Kg)	0.272
ConvF	1.60
Relative permittivity	36.08
Conductivity (S/m)	4.87

Maximum location: X=15.00, Y=-41.00 ; SAR Peak: 1.32 W/kg

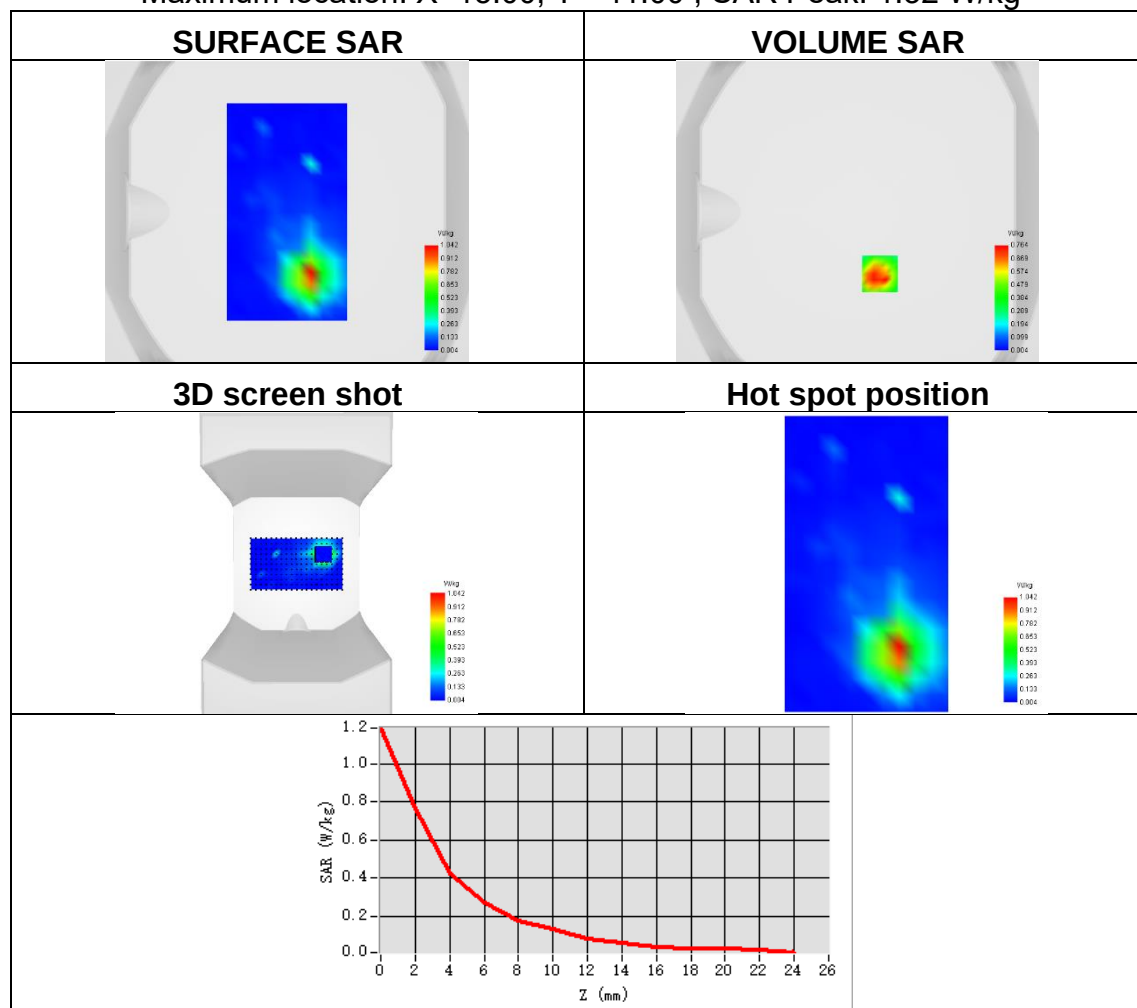




Plot 35:

Test Date	2025-09-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-2c
Signal	IEEE 802.11a
Frequency	5700
SAR 10g (W/Kg)	0.031
SAR 1g (W/Kg)	0.115
ConvF	1.63
Relative permittivity	35.76
Conductivity (S/m)	5.04

Maximum location: X=-8.00, Y=1.00 ; SAR Peak: 1.34 W/kg

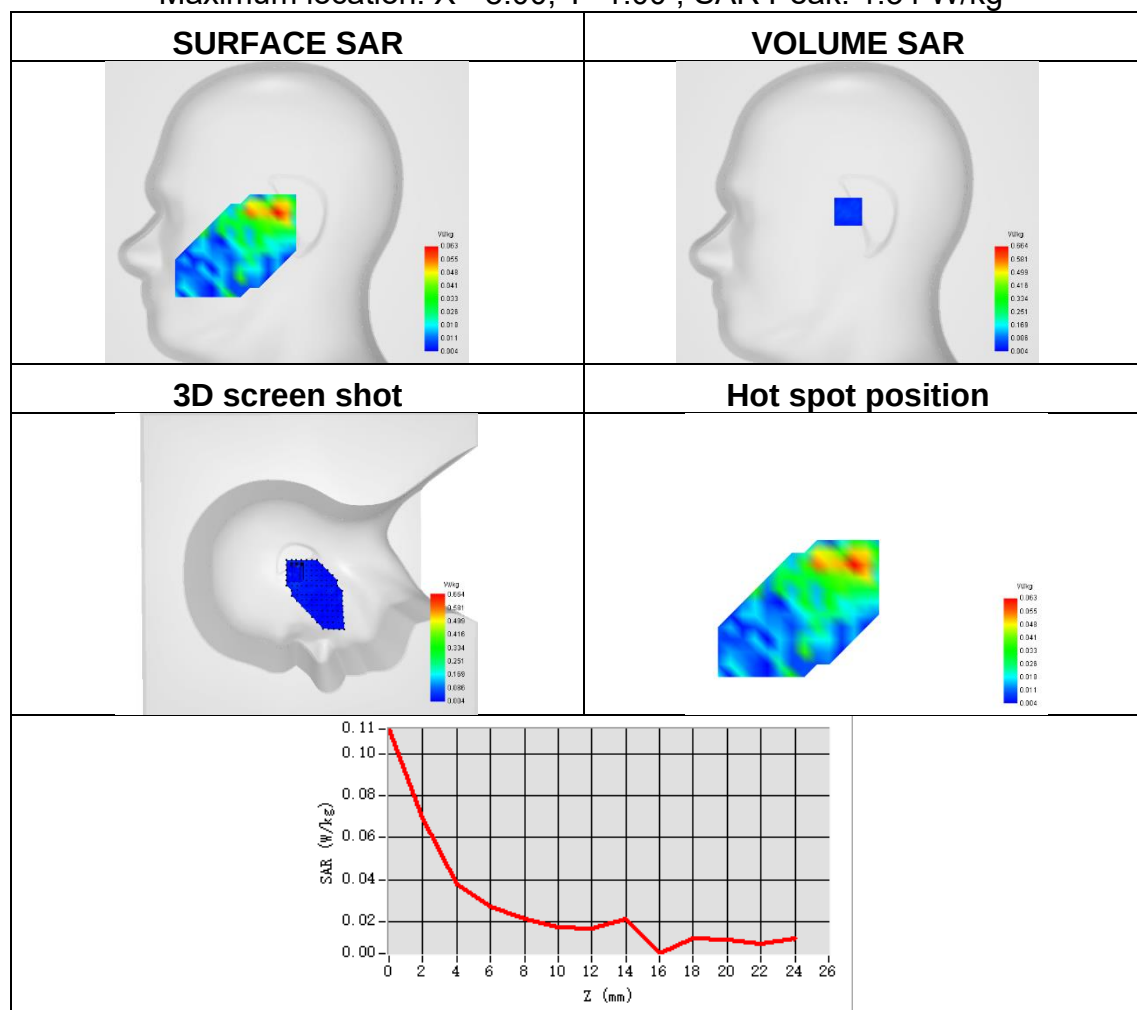




Plot 36:

Test Date	2025-09-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Left Side
Band	U-NII-2c
Signal	IEEE 802.11a
Frequency	5700
SAR 10g (W/Kg)	0.021
SAR 1g (W/Kg)	0.032
ConvF	1.63
Relative permittivity	35.76
Conductivity (S/m)	5.04

Maximum location: X=16.00, Y=-16.00 ; SAR Peak: 0.70 W/kg

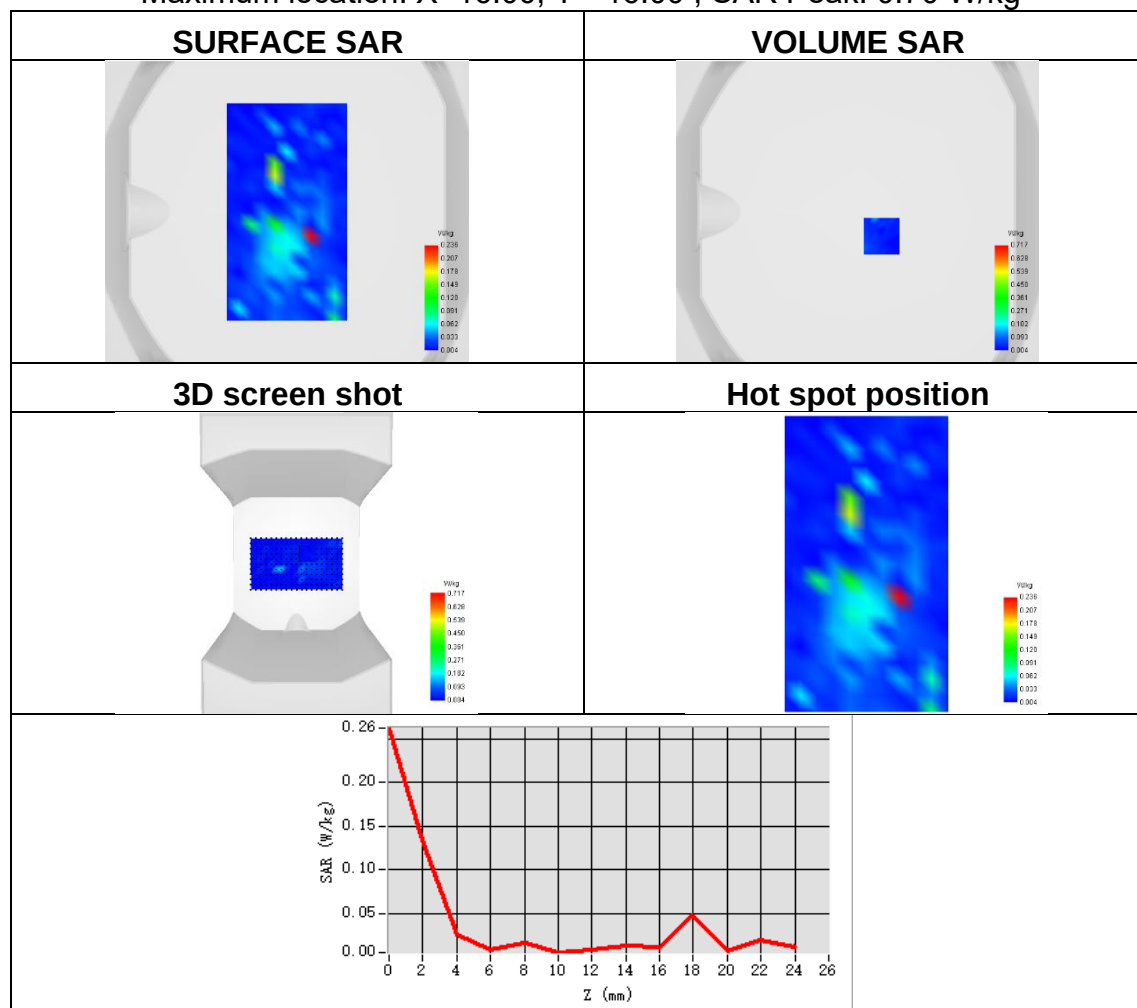




Plot 37:

Test Date	2025-09-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-2c
Signal	IEEE 802.11a
Frequency	5500
SAR 10g (W/Kg)	0.045
SAR 1g (W/Kg)	0.147
ConvF	1.63
Relative permittivity	35.76
Conductivity (S/m)	5.04

Maximum location: X=-9.00, Y=-6.00 ; SAR Peak: 0.70 W/kg

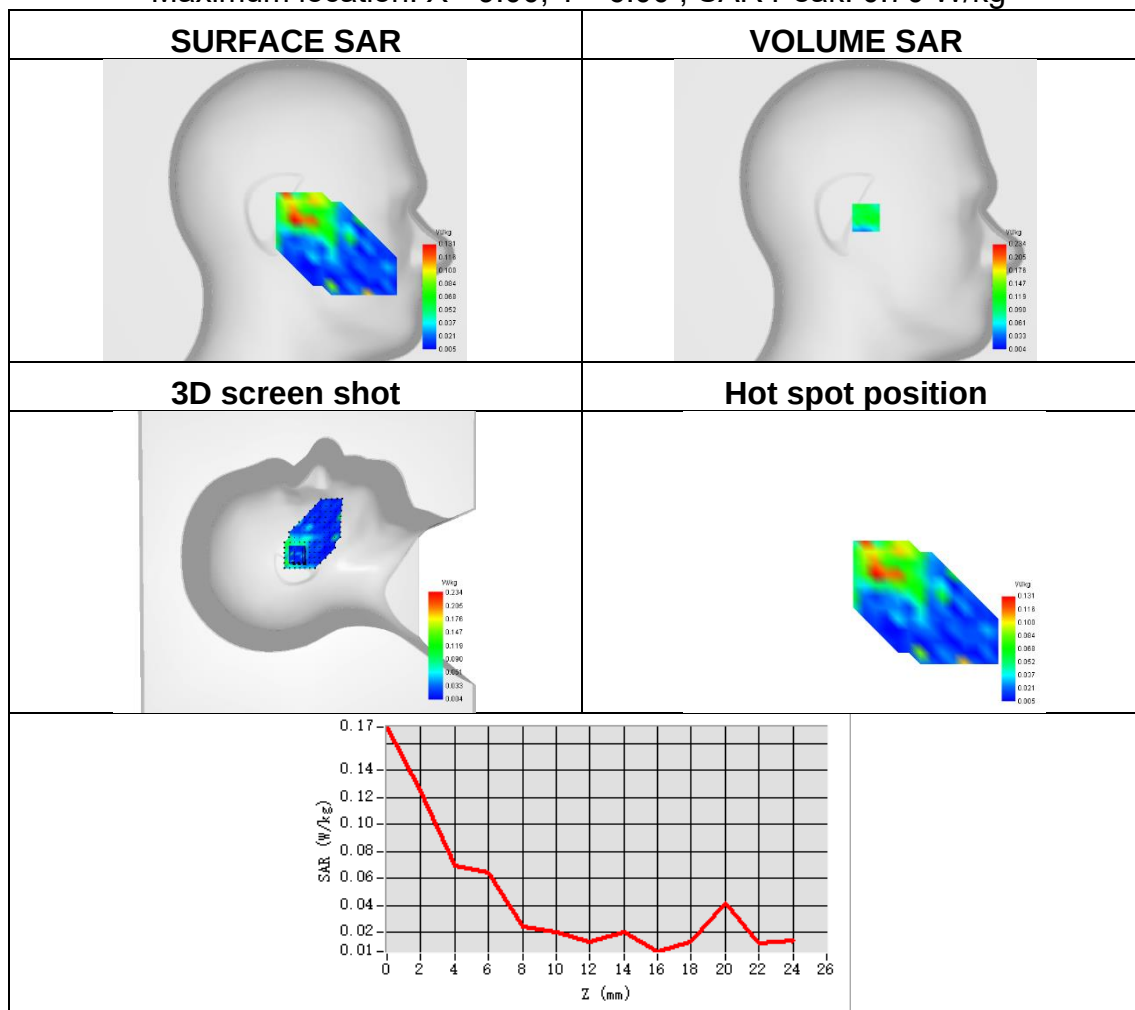




Plot 38:

Test Date	2025-09-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-2c
Signal	IEEE 802.11a
Frequency	5500
SAR 10g (W/Kg)	0.100
SAR 1g (W/Kg)	0.277
ConvF	1.63
Relative permittivity	35.76
Conductivity (S/m)	5.04

Maximum location: X=9.00, Y=-43.00 ; SAR Peak: 0.77 W/kg

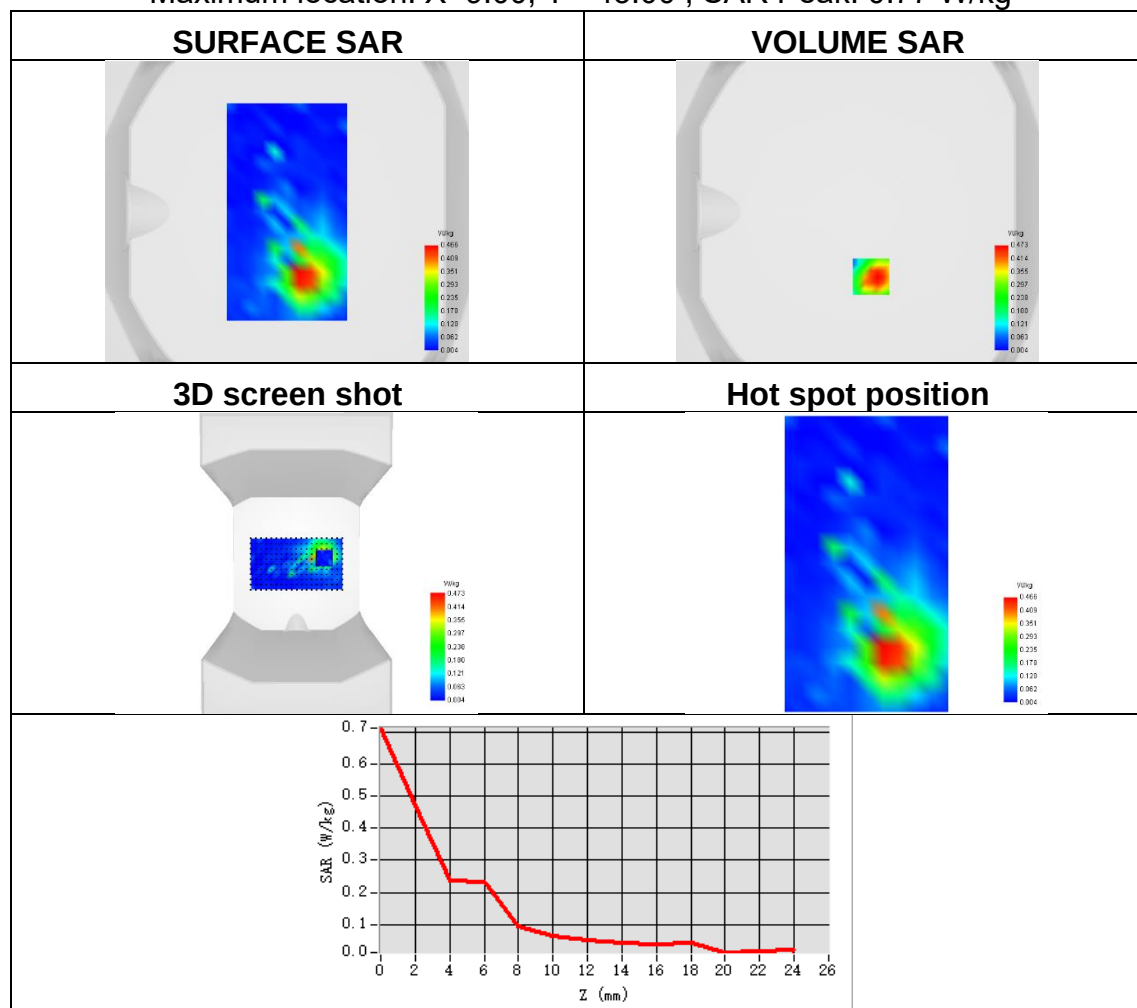




Plot 39:

Test Date	2025-09-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-2c
Signal	IEEE 802.11n
Frequency	5550
SAR 10g (W/Kg)	0.048
SAR 1g (W/Kg)	0.130
ConvF	1.63
Relative permittivity	35.76
Conductivity (S/m)	5.04

Maximum location: X=-33.00, Y=-16.00 ; SAR Peak: 0.43 W/kg

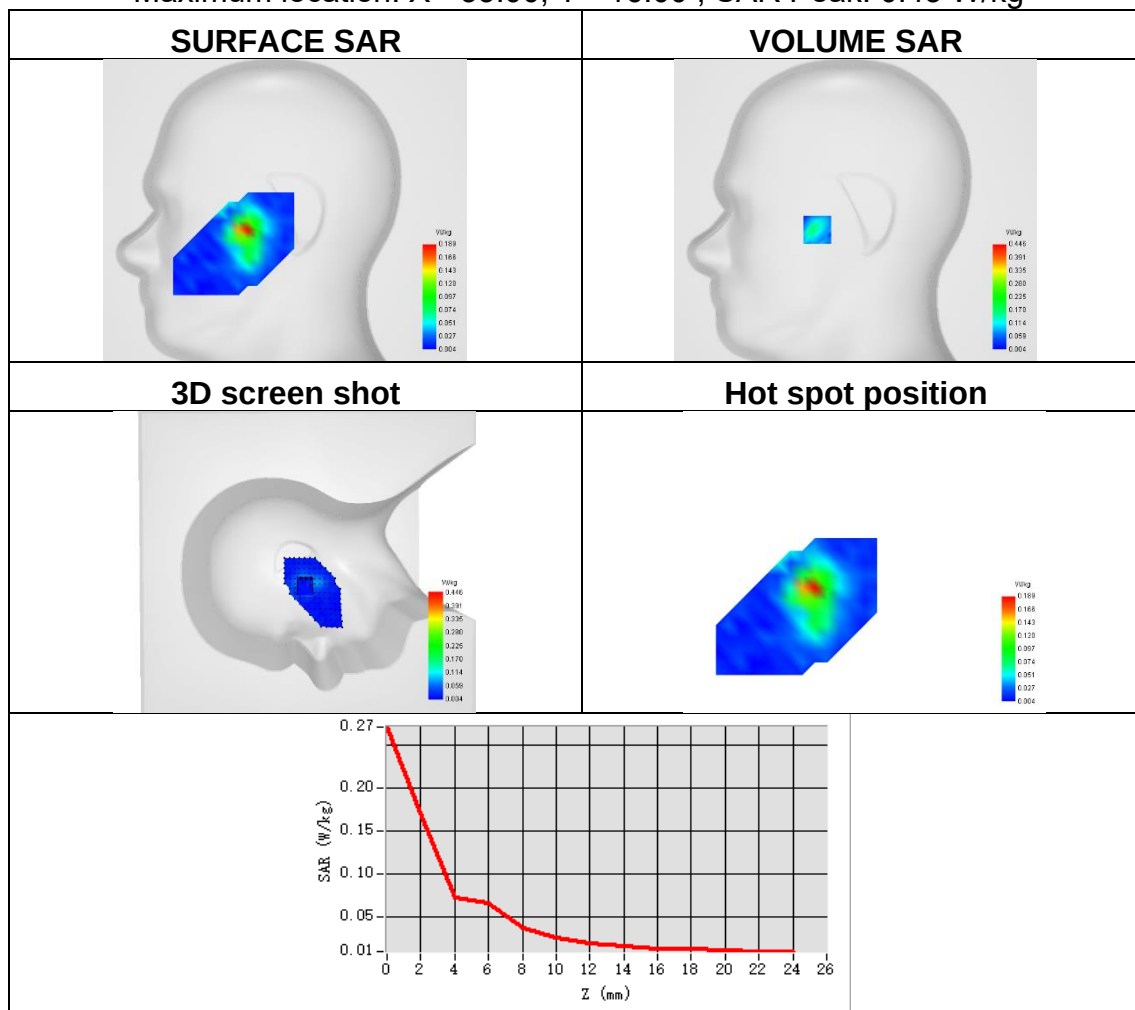




Plot 40:

Test Date	2025-09-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-2c
Signal	IEEE 802.11n
Frequency	5550
SAR 10g (W/Kg)	0.060
SAR 1g (W/Kg)	0.169
ConvF	1.63
Relative permittivity	35.76
Conductivity (S/m)	5.04

Maximum location: X=16.00, Y=-10.00 ; SAR Peak: 0.70 W/kg

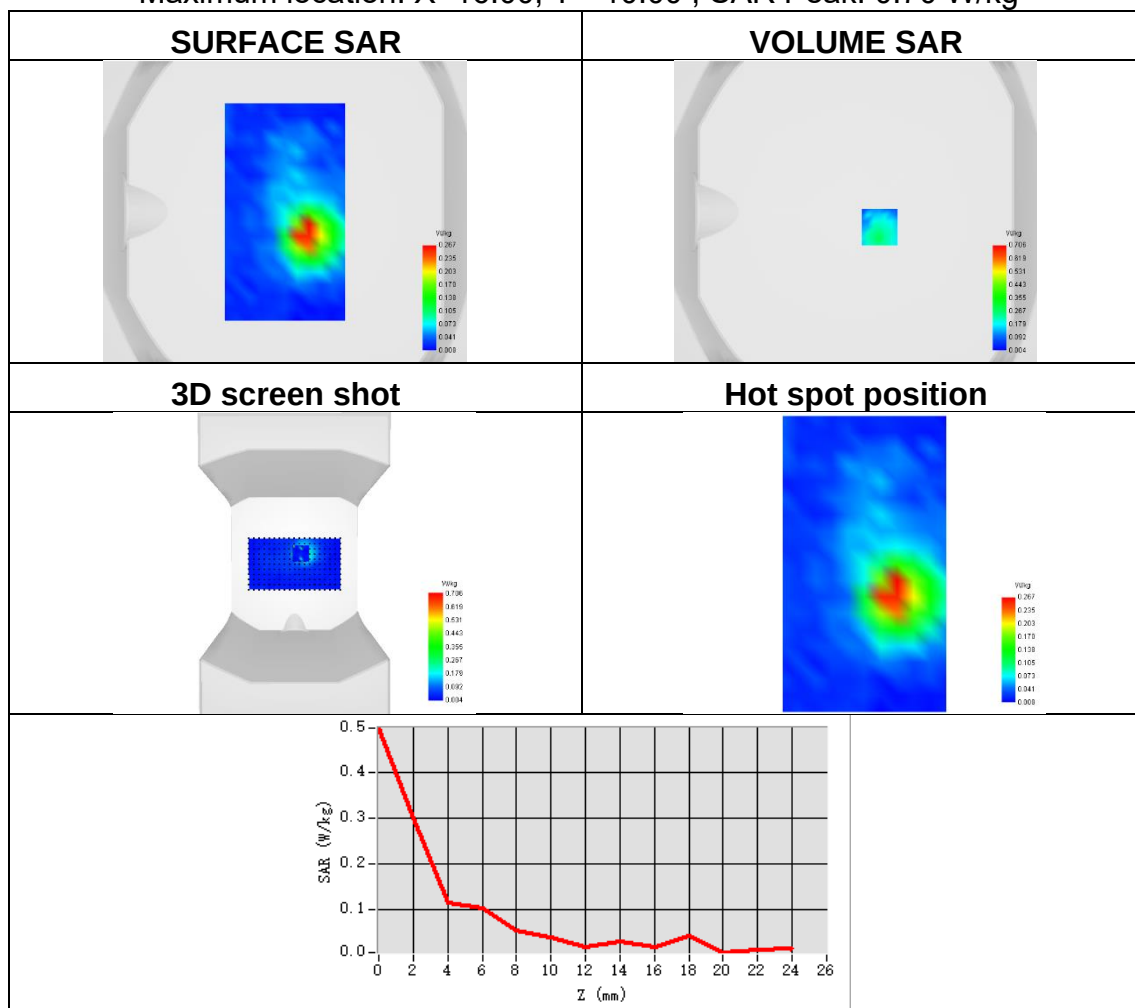




Plot 41:

Test Date	2025-09-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-2c
Signal	IEEE 802.11n
Frequency	5550
SAR 10g (W/Kg)	0.016
SAR 1g (W/Kg)	0.040
ConvF	1.63
Relative permittivity	35.76
Conductivity (S/m)	5.04

Maximum location: X=-16.00, Y=-24.00 ; SAR Peak: 0.68 W/kg

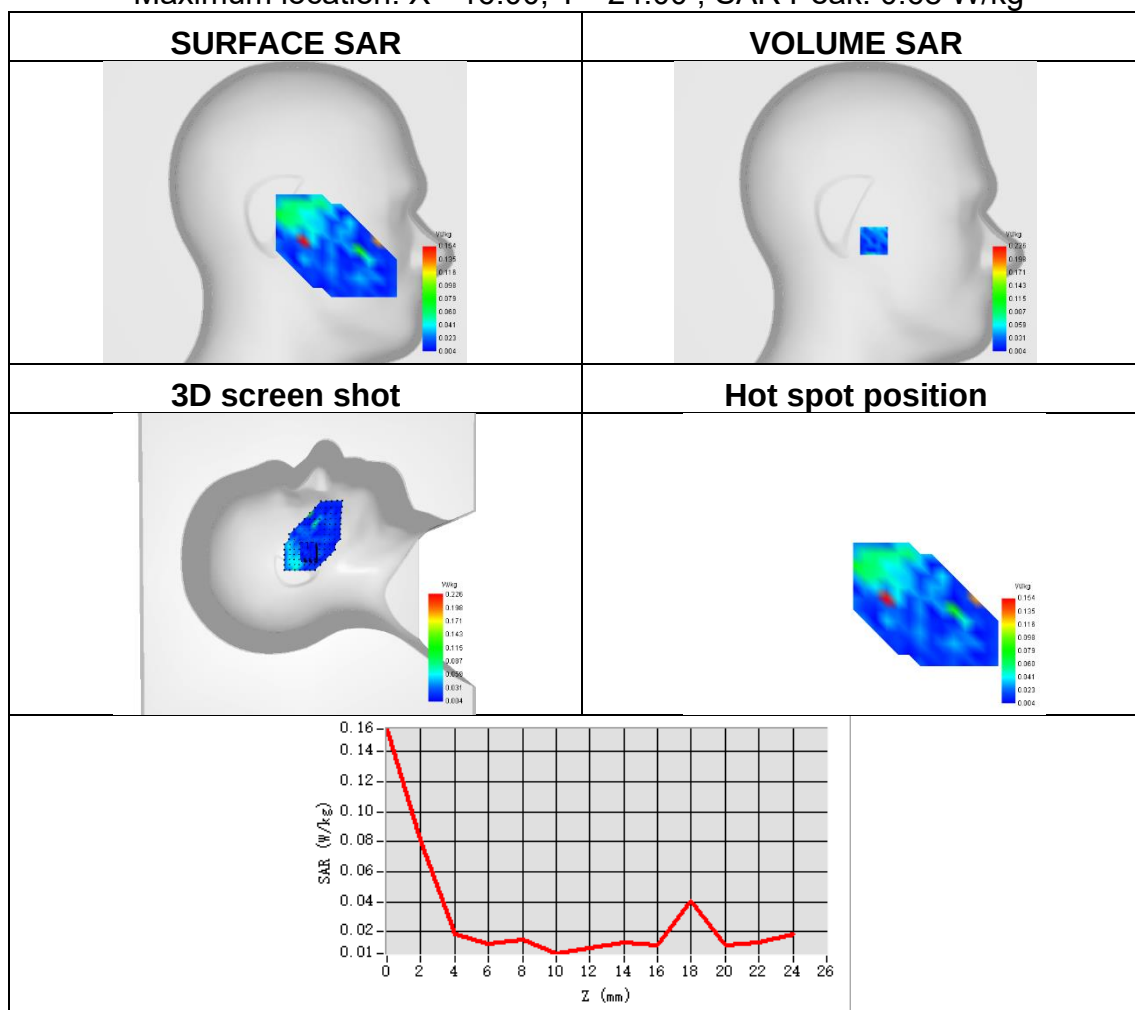




Plot 42:

Test Date	2025-09-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-2c
Signal	IEEE 802.11n
Frequency	5550
SAR 10g (W/Kg)	0.037
SAR 1g (W/Kg)	0.106
ConvF	1.63
Relative permittivity	35.76
Conductivity (S/m)	5.04

Maximum location: X=16.00, Y=-22.00 ; SAR Peak: 0.39 W/kg

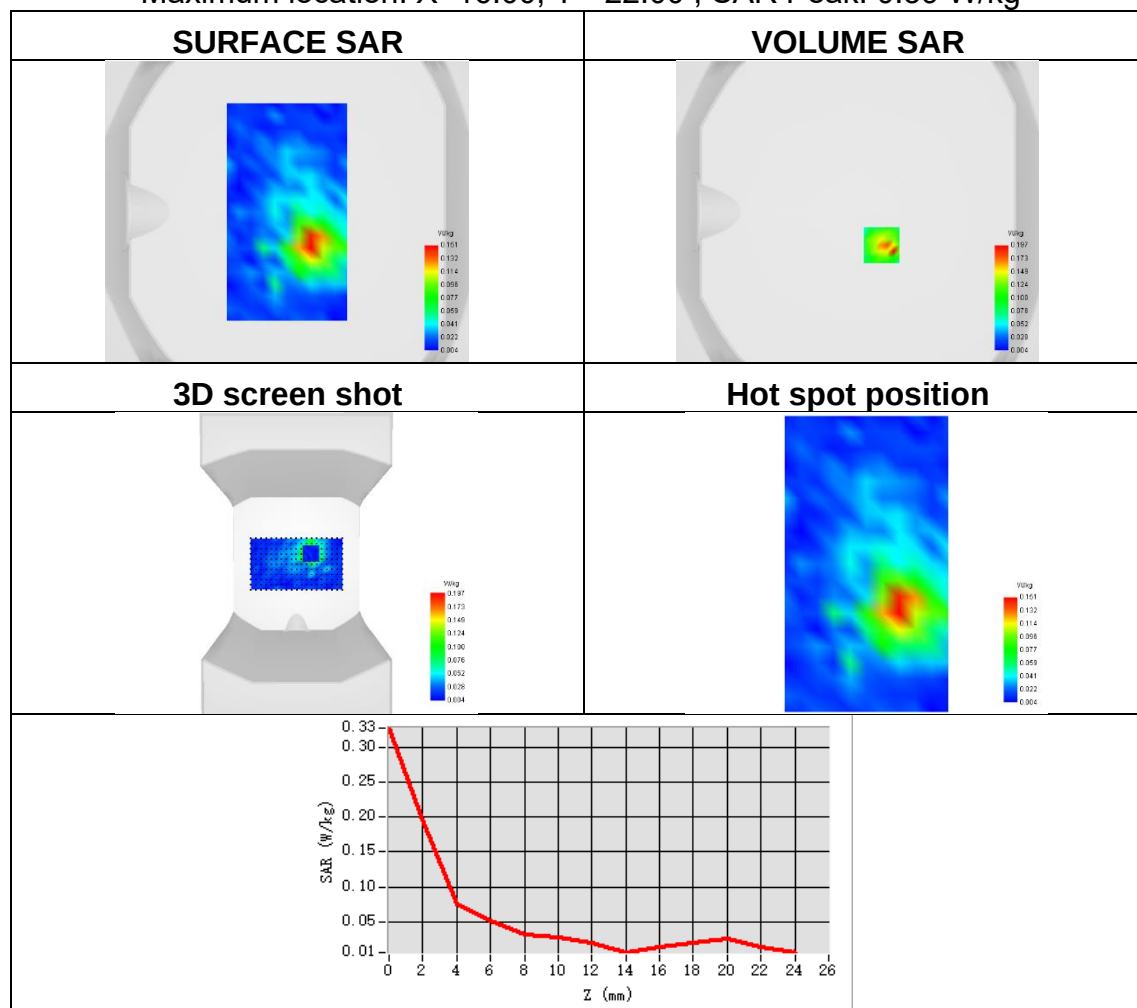




Plot 43:

Test Date	2025-10-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.016
SAR 1g (W/Kg)	0.062
ConvF	1.62
Relative permittivity	36.10
Conductivity (S/m)	5.33

Maximum location: X=-24.00, Y=-8.00 ; SAR Peak: 0.40 W/kg

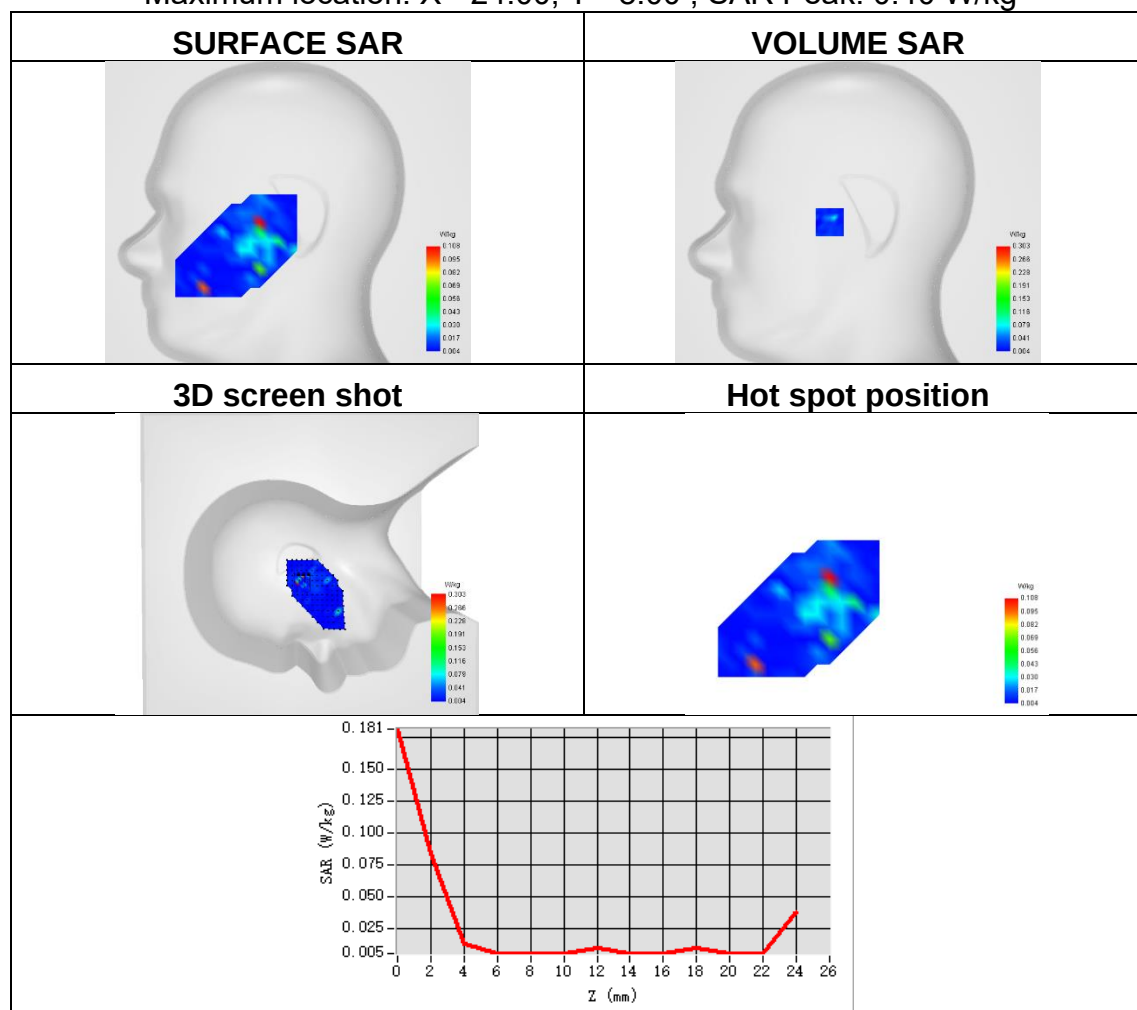




Plot 44:

Test Date	2025-10-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.039
SAR 1g (W/Kg)	0.138
ConvF	1.62
Relative permittivity	36.10
Conductivity (S/m)	5.33

Maximum location: X=10.00, Y=33.00 ; SAR Peak: 2.08 W/kg

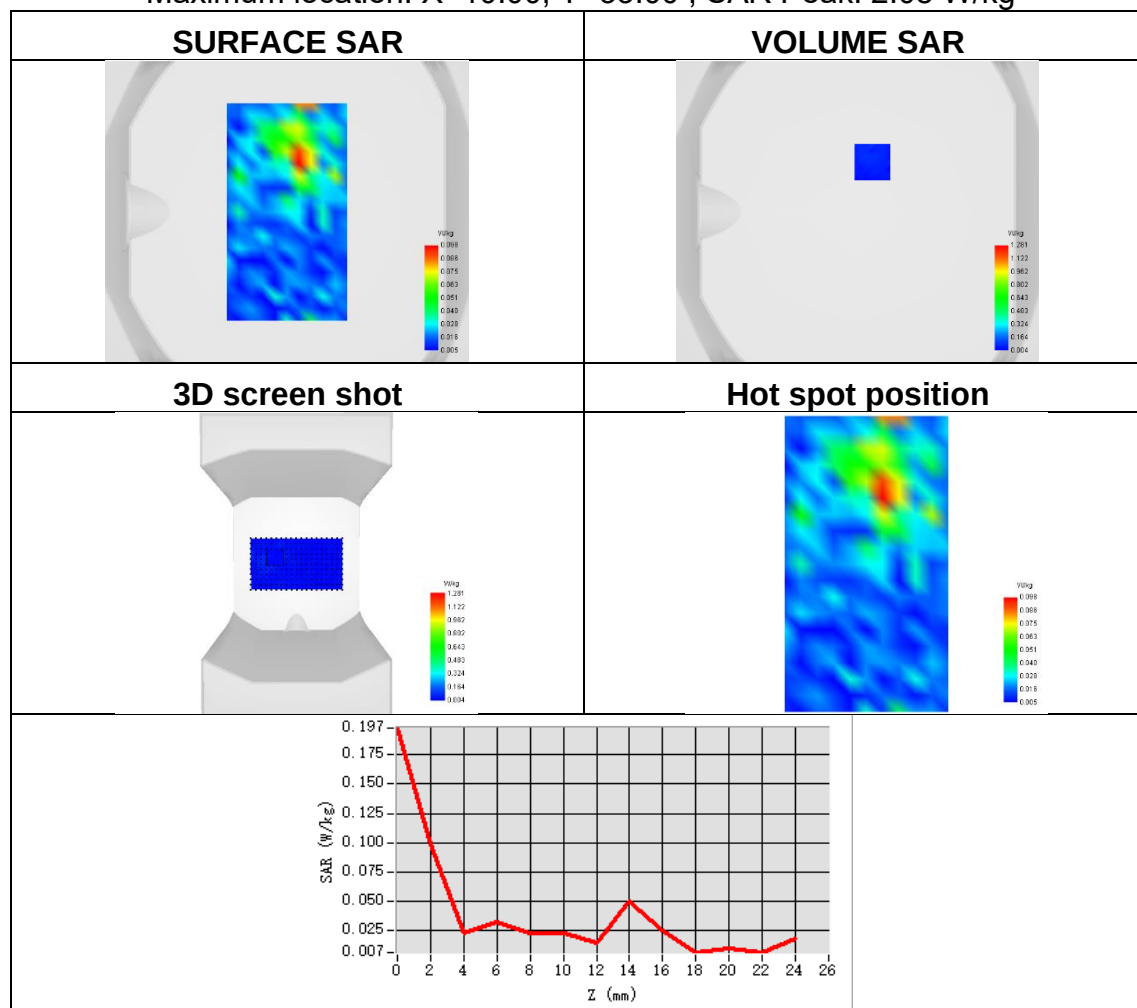




Plot 45:

Test Date	2025-10-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.066
SAR 1g (W/Kg)	0.237
ConvF	1.62
Relative permittivity	36.10
Conductivity (S/m)	5.33

Maximum location: X=-34.00, Y=-1.00 ; SAR Peak: 1.81 W/kg

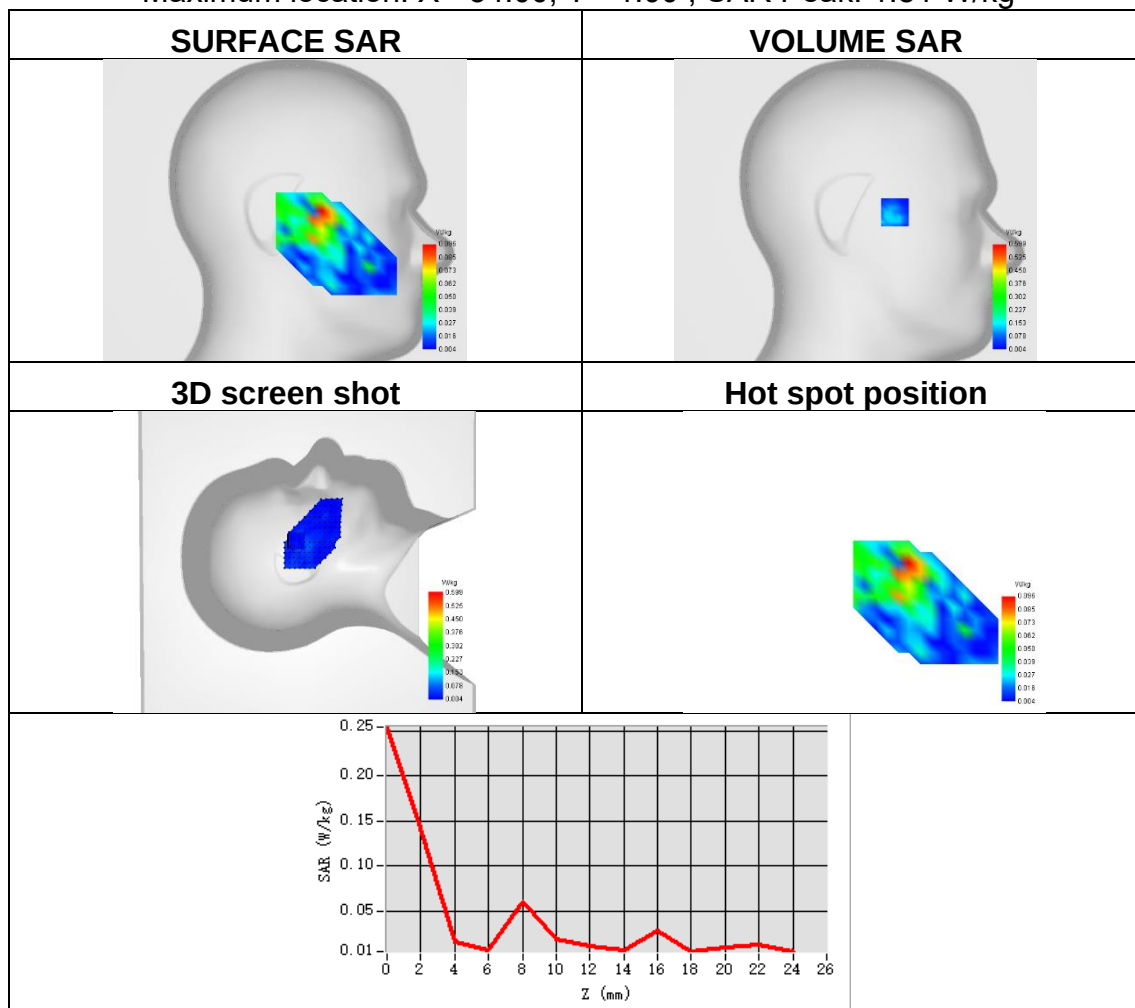




Plot 46:

Test Date	2025-10-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.092
SAR 1g (W/Kg)	0.262
ConvF	1.62
Relative permittivity	36.10
Conductivity (S/m)	5.33

Maximum location: X=10.00, Y=-24.00 ; SAR Peak: 0.83 W/kg

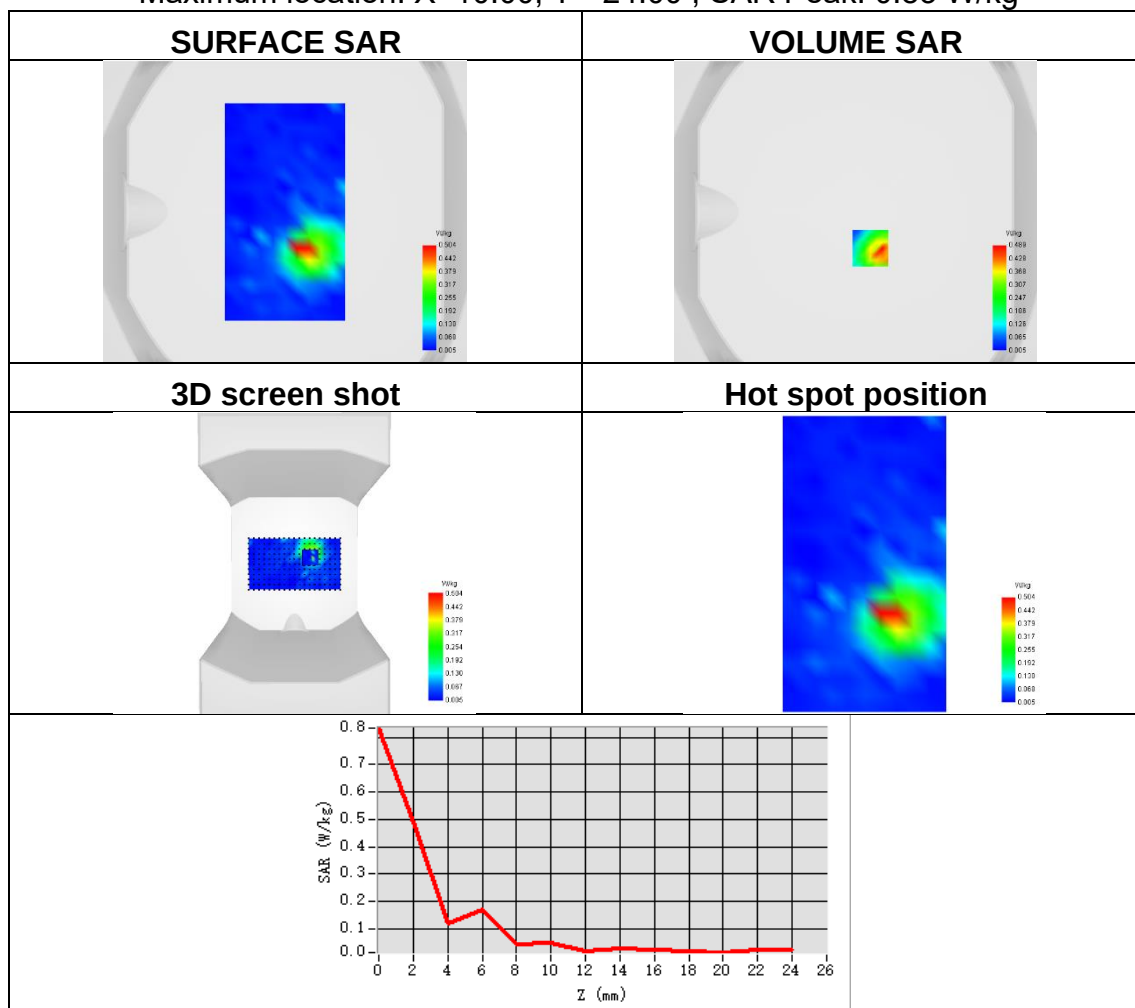




Plot 47:

Test Date	2025-10-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	U-NII-1
Signal	IEEE 802.11ax
Frequency	5745
SAR 10g (W/Kg)	0.062
SAR 1g (W/Kg)	0.384
ConvF	1.62
Relative permittivity	36.10
Conductivity (S/m)	5.33

Maximum location: X=-25.00, Y=2.00 ; SAR Peak: 4.17 W/kg

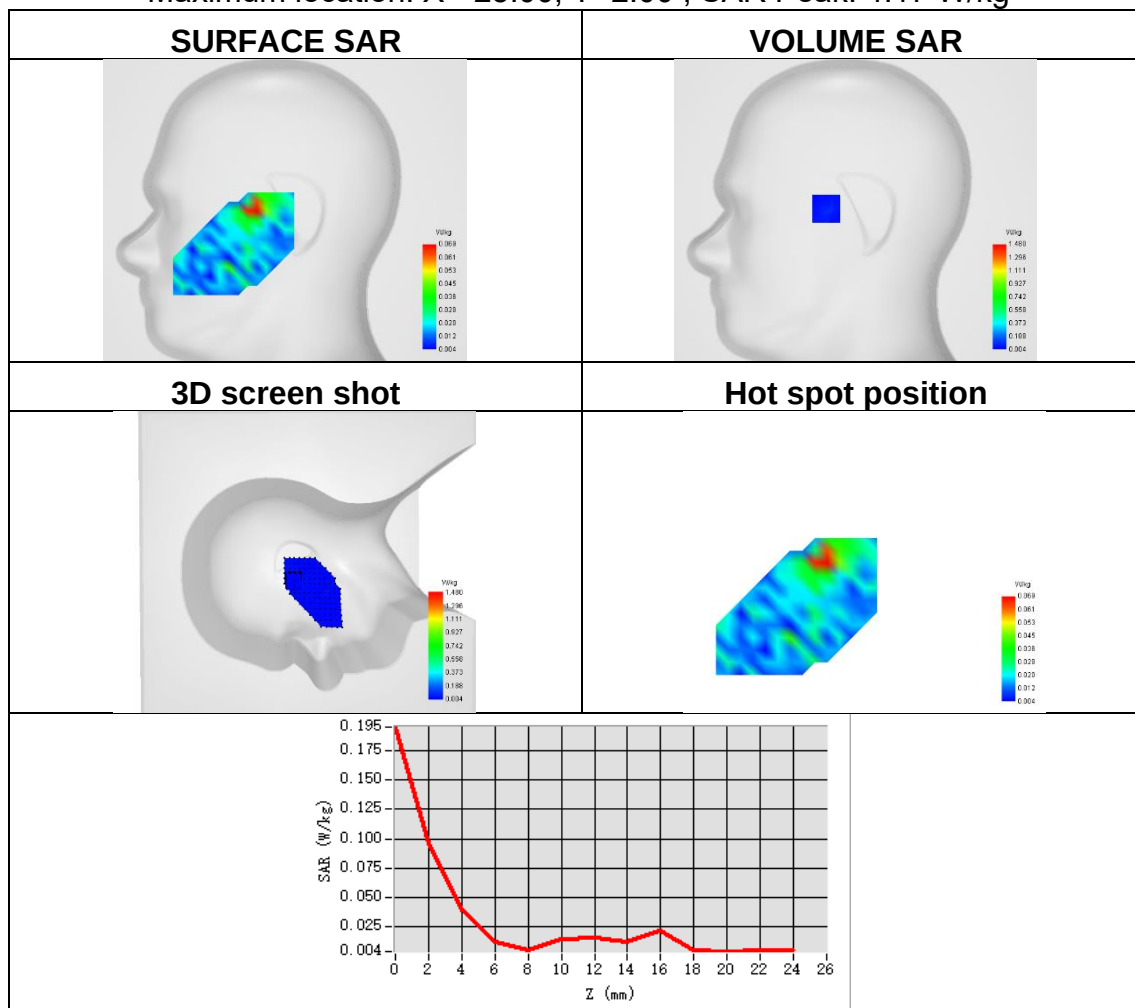




Plot 48:

Test Date	2025-10-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1
Signal	IEEE 802.11ax
Frequency	5745
SAR 10g (W/Kg)	0.034
SAR 1g (W/Kg)	0.082
ConvF	1.62
Relative permittivity	36.10
Conductivity (S/m)	5.33

Maximum location: X=16.00, Y=-24.00 ; SAR Peak: 0.36 W/kg

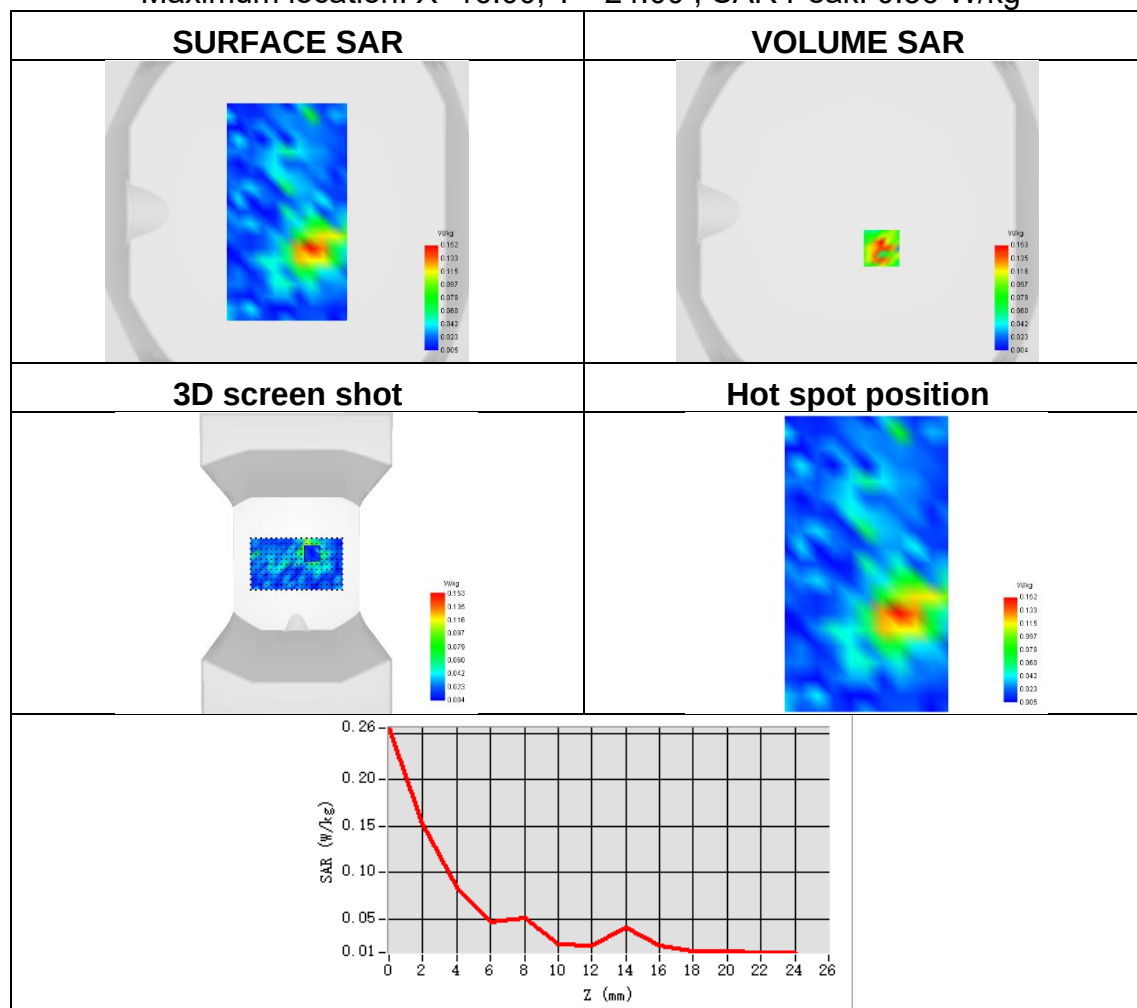




Plot 49:

Test Date	2025-10-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-3
Signal	IEEE 802.11ax
Frequency	5745
SAR 10g (W/Kg)	0.017
SAR 1g (W/Kg)	0.082
ConvF	1.62
Relative permittivity	36.10
Conductivity (S/m)	5.33

Maximum location: X=-56.00, Y=-32.00 ; SAR Peak: 0.97 W/kg

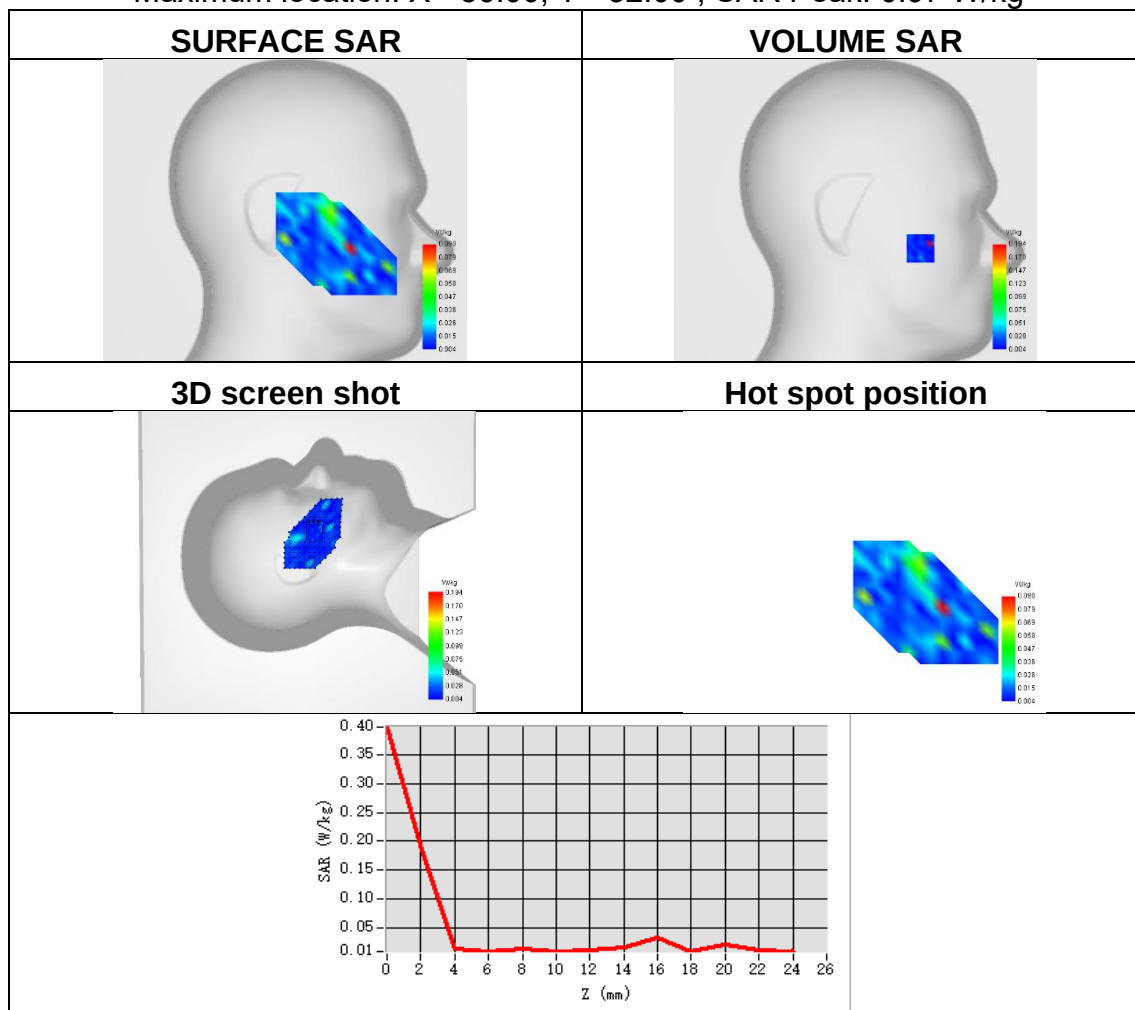




Plot 50:

Test Date	2025-10-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-3
Signal	IEEE 802.11ax
Frequency	5745
SAR 10g (W/Kg)	0.045
SAR 1g (W/Kg)	0.127
ConvF	1.62
Relative permittivity	36.10
Conductivity (S/m)	5.33

Maximum location: X=16.00, Y=-25.00 ; SAR Peak: 1.11 W/kg

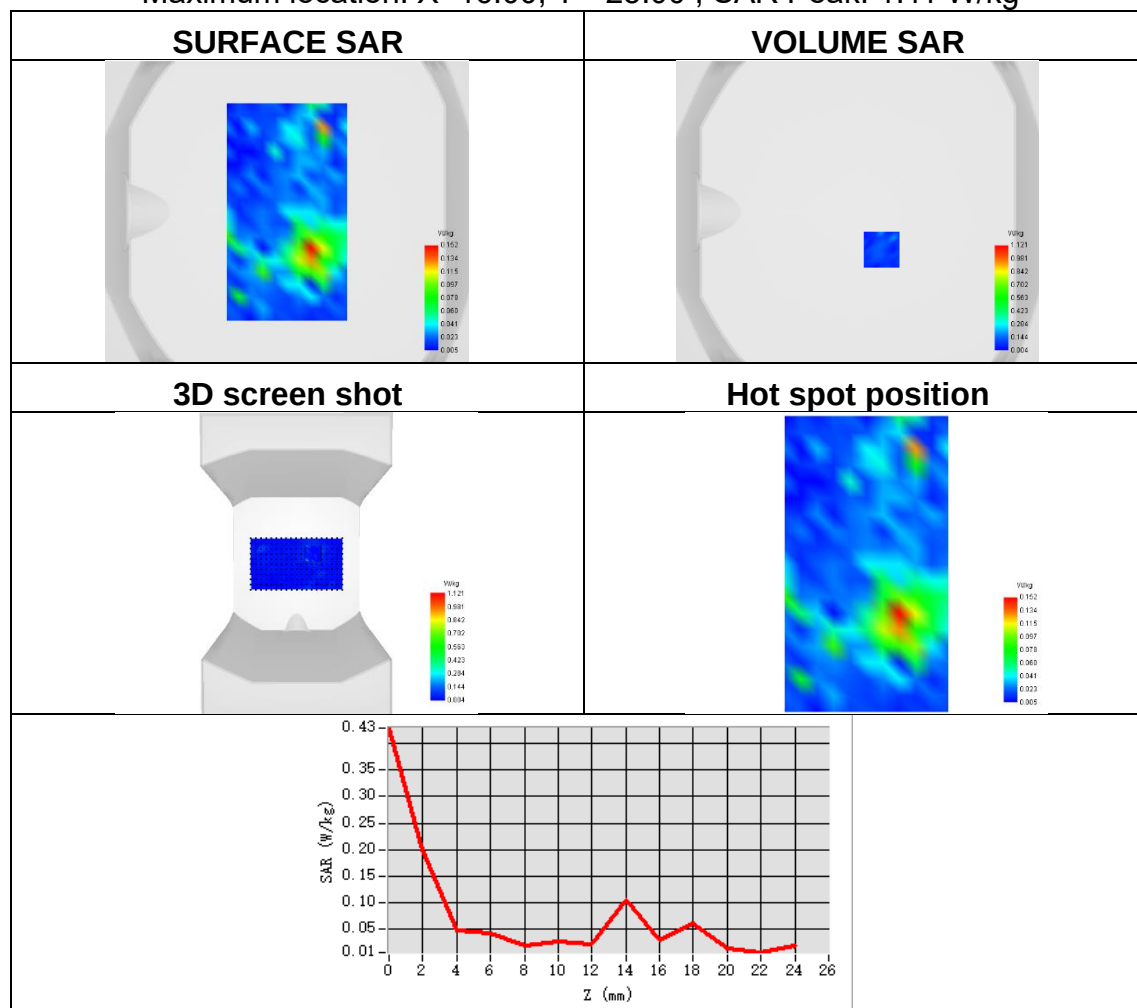




Plot 51:

Test Date	2025-09-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 2
Signal	LTE FDD
Frequency	1880
SAR 10g (W/Kg)	0.083
SAR 1g (W/Kg)	0.159
ConvF	1.34
Relative permittivity	40.89
Conductivity (S/m)	1.44

Maximum location: X=-43.00, Y=-44.00 ; SAR Peak: 0.36 W/kg

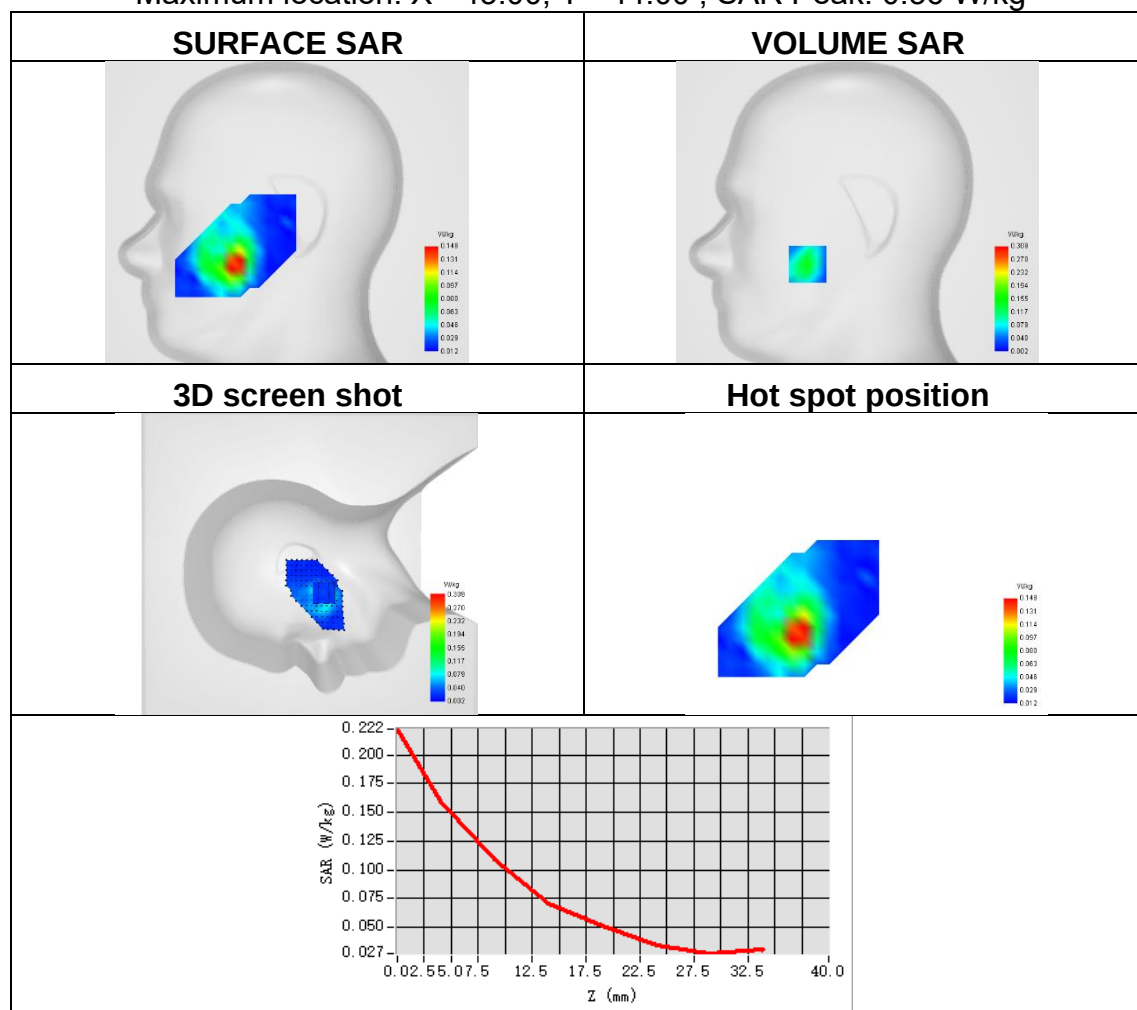




Plot 52:

Test Date	2025-09-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1880
SAR 10g (W/Kg)	0.116
SAR 1g (W/Kg)	0.203
ConvF	1.34
Relative permittivity	40.89
Conductivity (S/m)	1.44

Maximum location: X=14.00, Y=11.00 ; SAR Peak: 0.31 W/kg

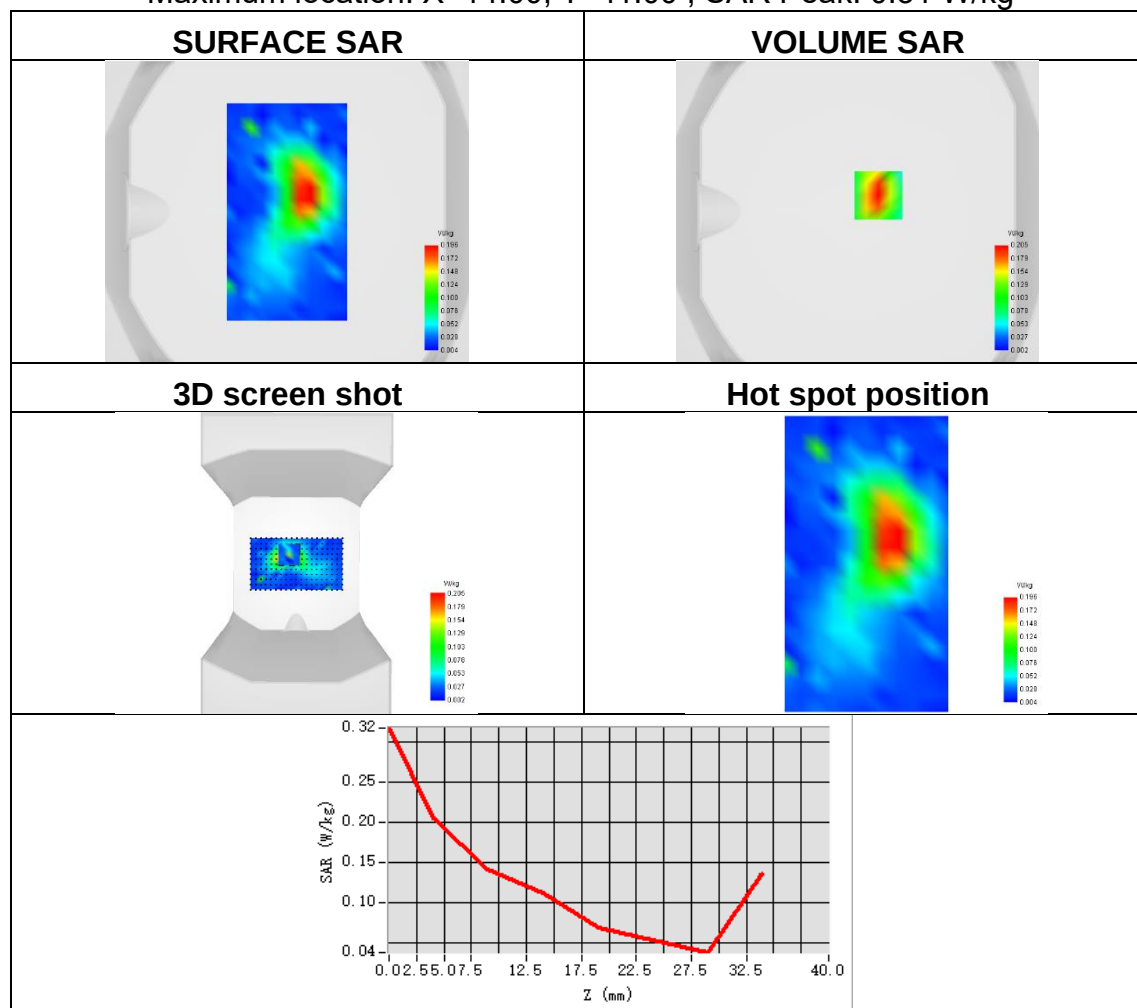




Plot 53:

Test Date	2025-09-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 4
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.181
SAR 1g (W/Kg)	0.400
ConvF	1.21
Relative permittivity	40.89
Conductivity (S/m)	1.44

Maximum location: X=-42.00, Y=-41.00 ; SAR Peak: 1.01 W/kg

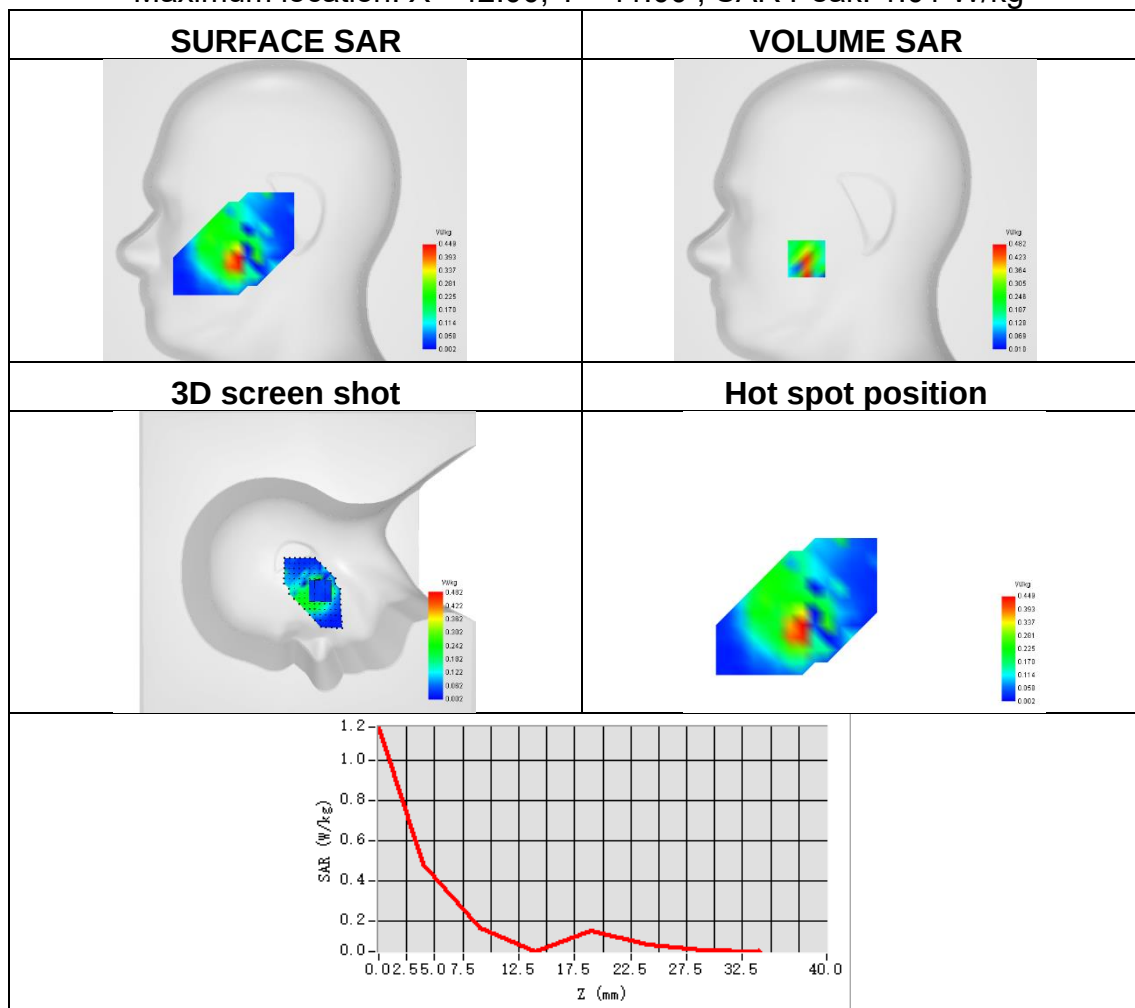




Plot 54:

Test Date	2025-09-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.390
SAR 1g (W/Kg)	0.701
ConvF	1.21
Relative permittivity	40.89
Conductivity (S/m)	1.44

Maximum location: X=9.00, Y=0.00 ; SAR Peak: 1.11 W/kg

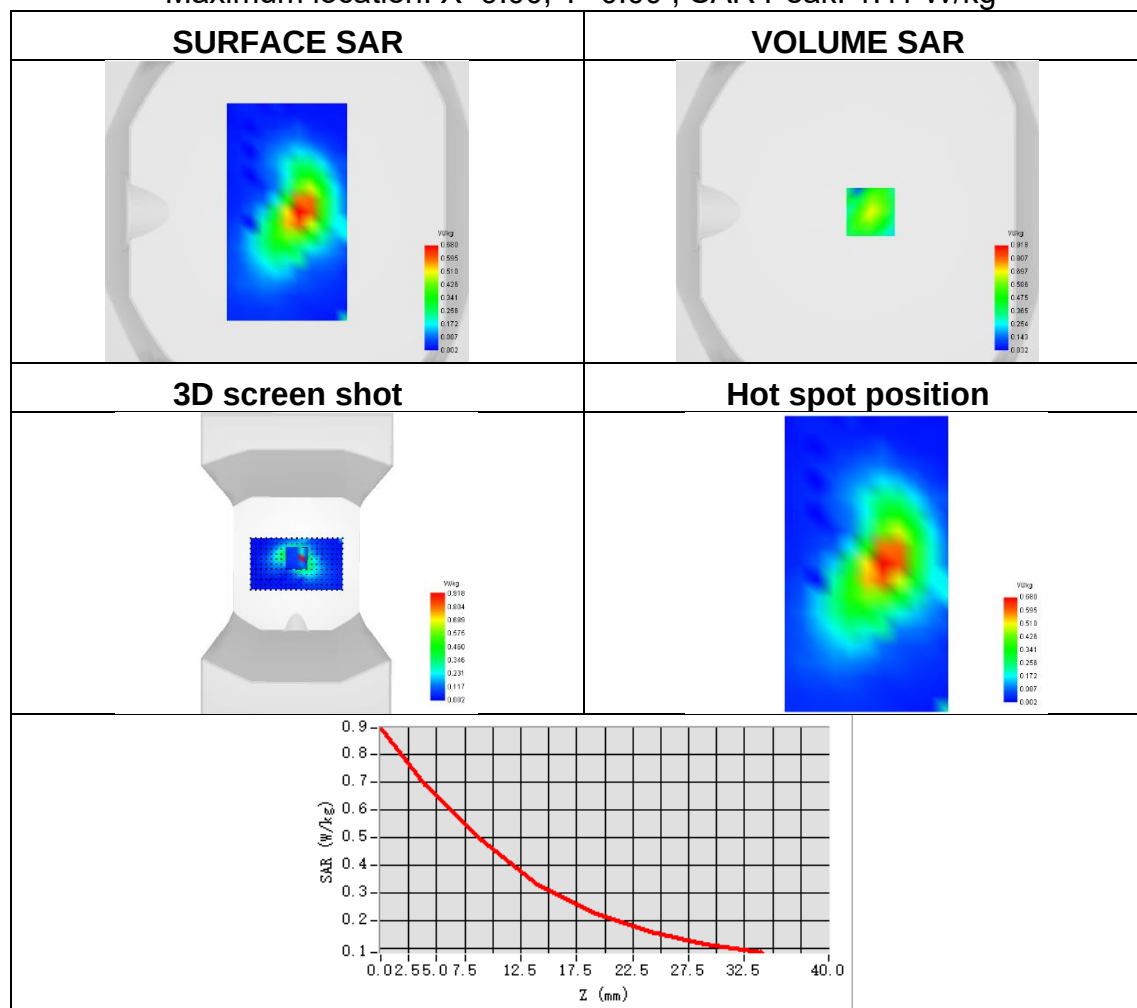




Plot 55:

Test Date	2025-09-17
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.105
SAR 1g (W/Kg)	0.242
ConvF	1.02
Relative permittivity	41.86
Conductivity (S/m)	0.91

Maximum location: X=-63.00, Y=-40.00 ; SAR Peak: 1.02 W/kg

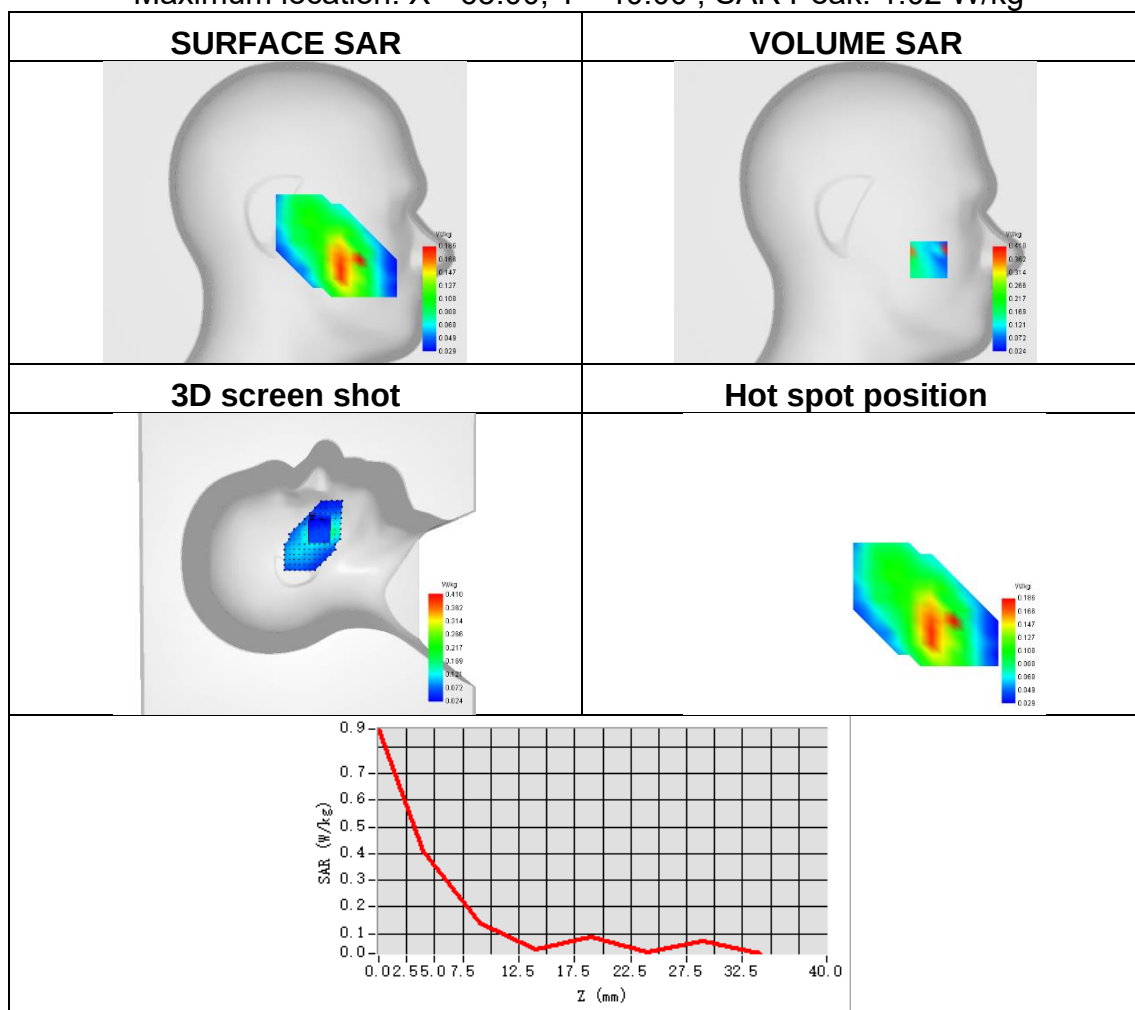




Plot 56:

Test Date	2025-09-17
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.265
SAR 1g (W/Kg)	0.484
ConvF	1.02
Relative permittivity	41.86
Conductivity (S/m)	0.91

Maximum location: X=14.00, Y=-6.00 ; SAR Peak: 0.72 W/kg

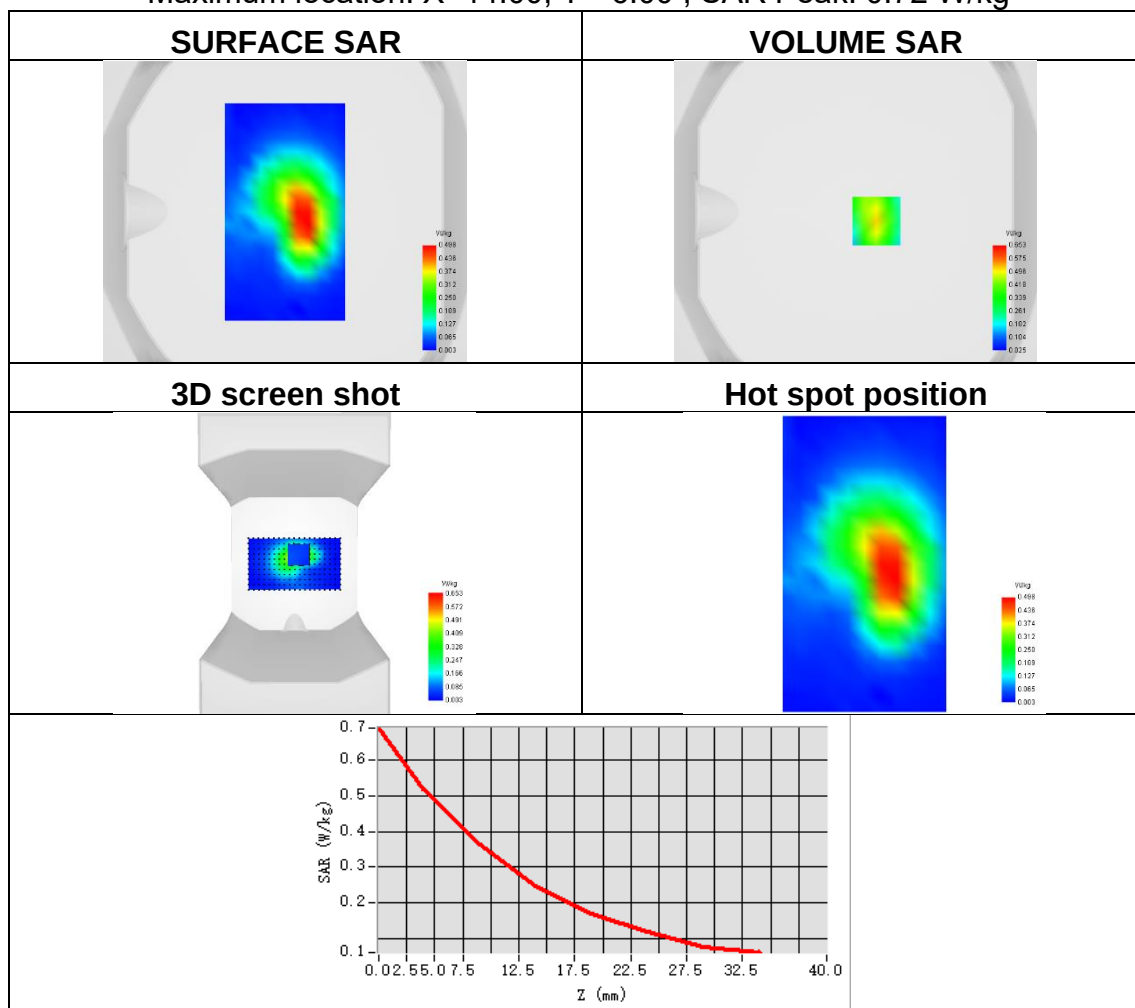




Plot 57:

Test Date	2025-09-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.029
SAR 1g (W/Kg)	0.077
ConvF	1.44
Relative permittivity	39.47
Conductivity (S/m)	1.94

Maximum location: X=-64.00, Y=-33.00 ; SAR Peak: 0.11 W/kg

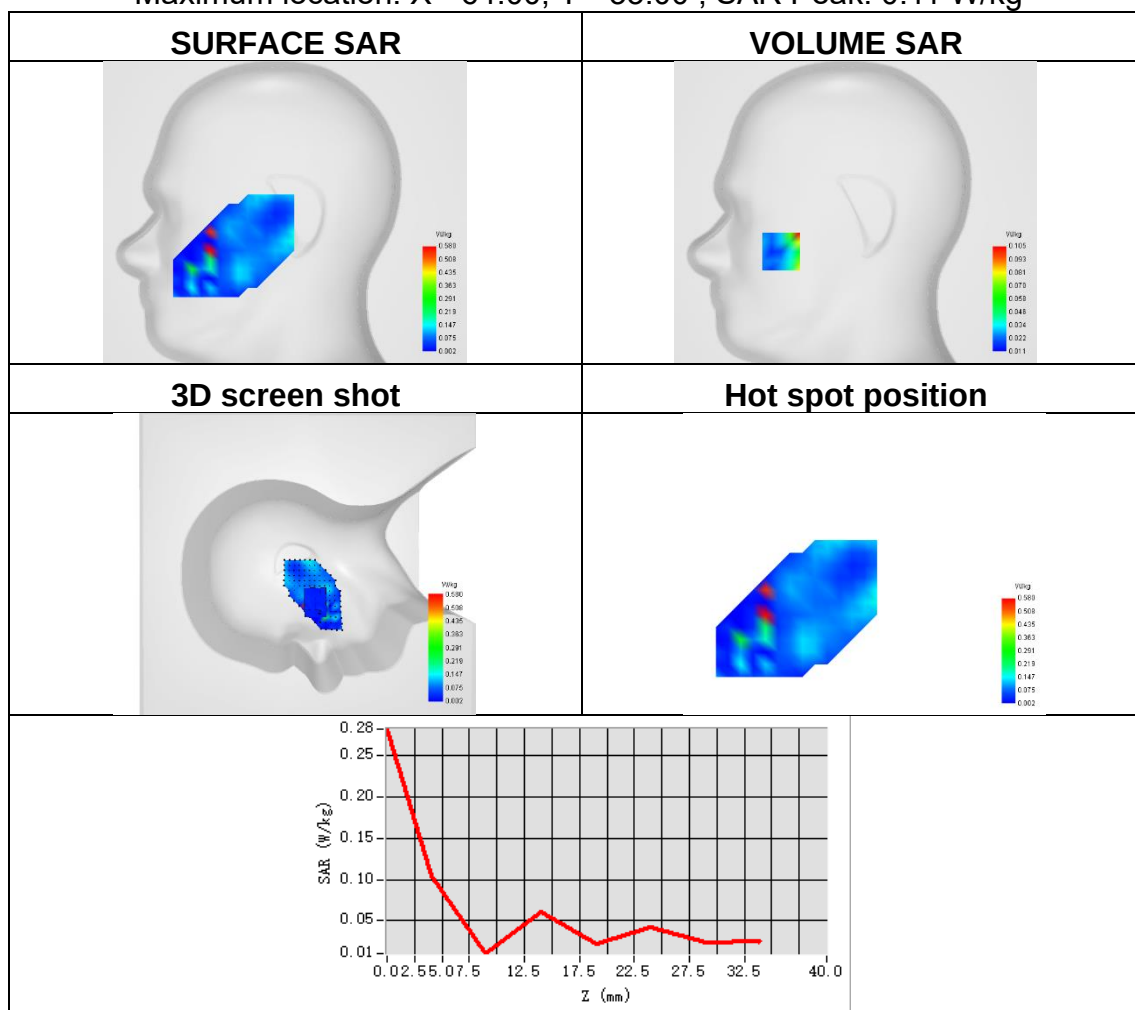




Plot 58:

Test Date	2025-09-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.403
SAR 1g (W/Kg)	0.755
ConvF	1.44
Relative permittivity	39.47
Conductivity (S/m)	1.94

Maximum location: X=10.00, Y=23.00 ; SAR Peak: 1.20 W/kg

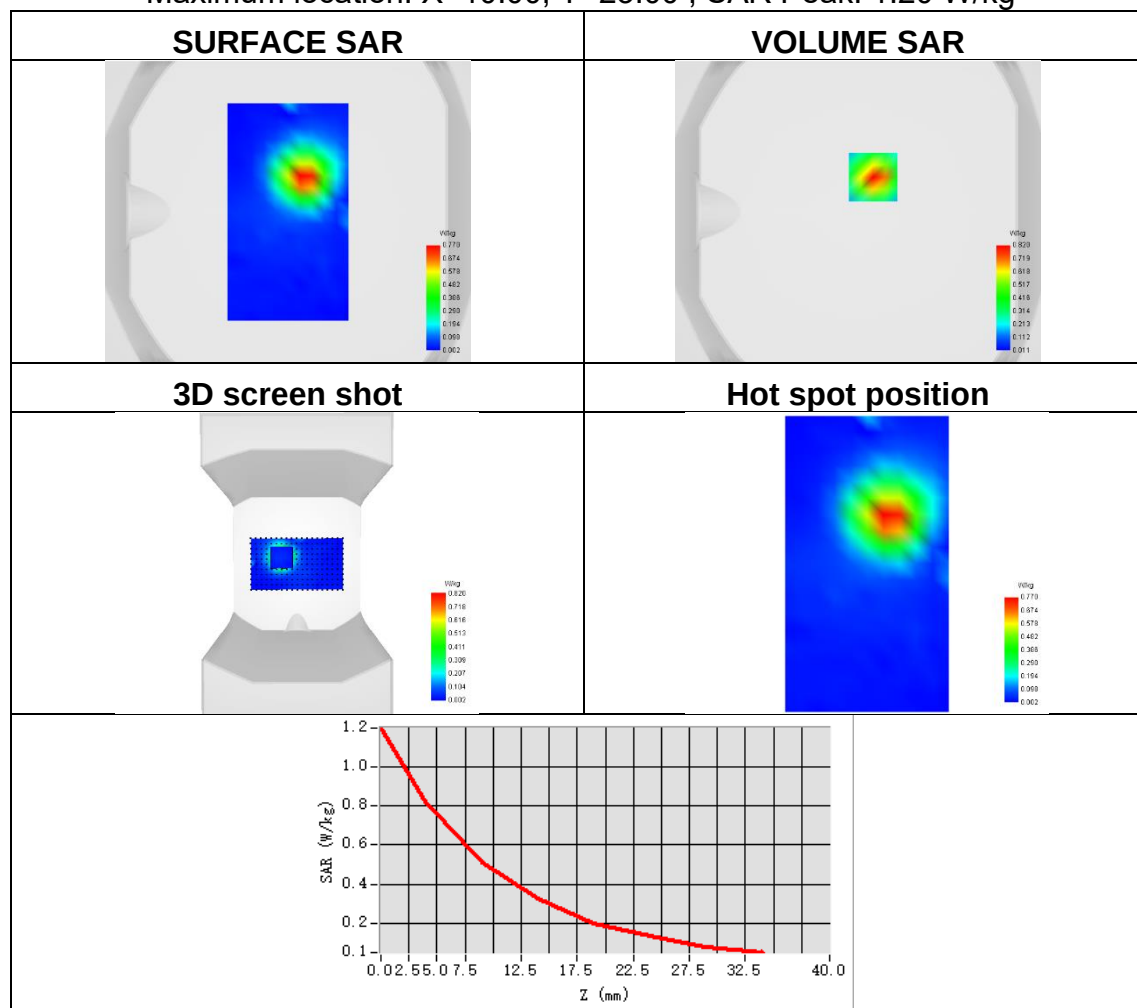




Plot 59:

Test Date	2025-09-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 12
Signal	LTE FDD
Frequency	704
SAR 10g (W/Kg)	0.073
SAR 1g (W/Kg)	0.173
ConvF	1.08
Relative permittivity	41.77
Conductivity (S/m)	0.87

Maximum location: X=-46.00, Y=-33.00 ; SAR Peak: 0.31 W/kg

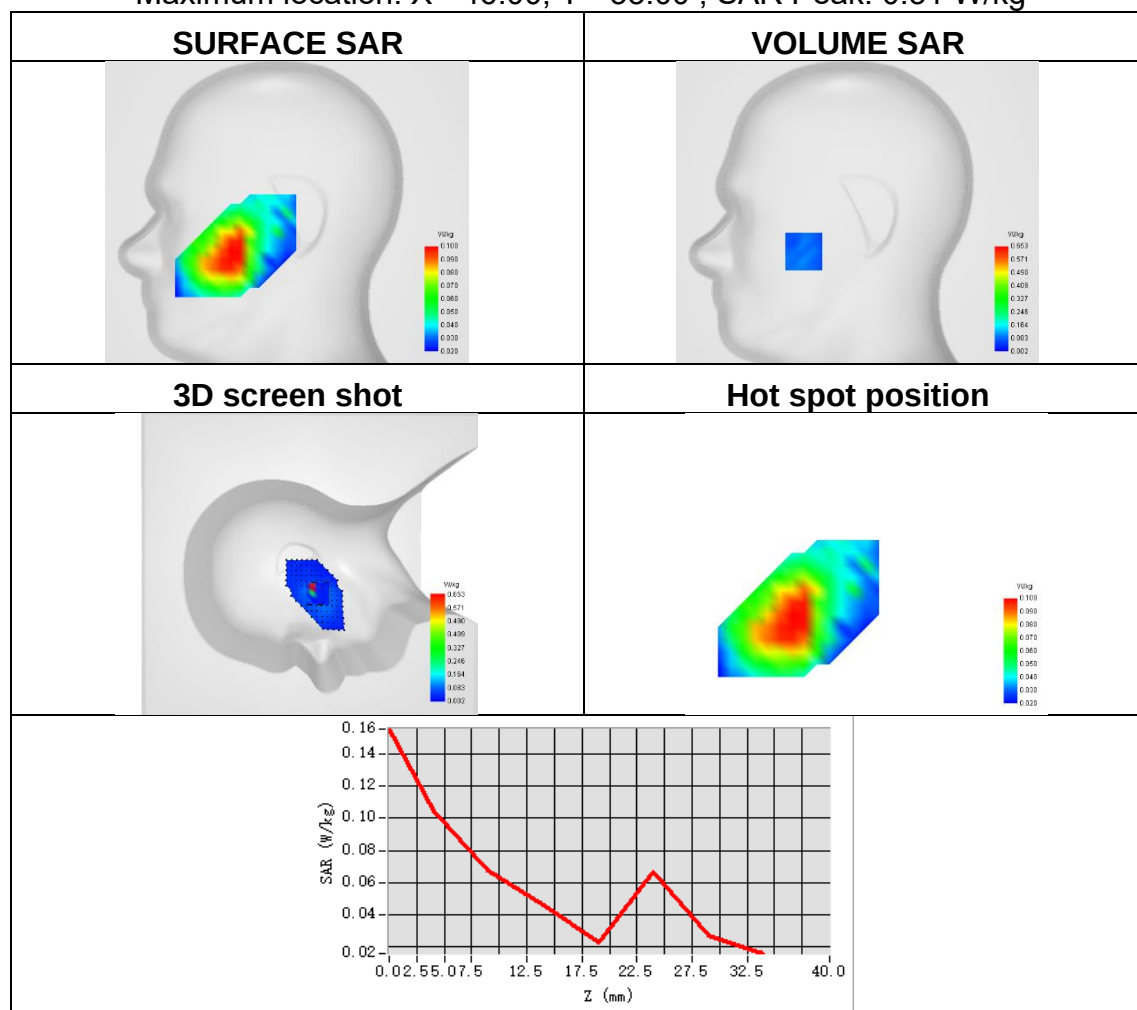




Plot 60:

Test Date	2025-09-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 12
Signal	LTE FDD
Frequency	704
SAR 10g (W/Kg)	0.104
SAR 1g (W/Kg)	0.179
ConvF	1.08
Relative permittivity	41.77
Conductivity (S/m)	0.87

Maximum location: X=15.00, Y=-2.00 ; SAR Peak: 0.25 W/kg

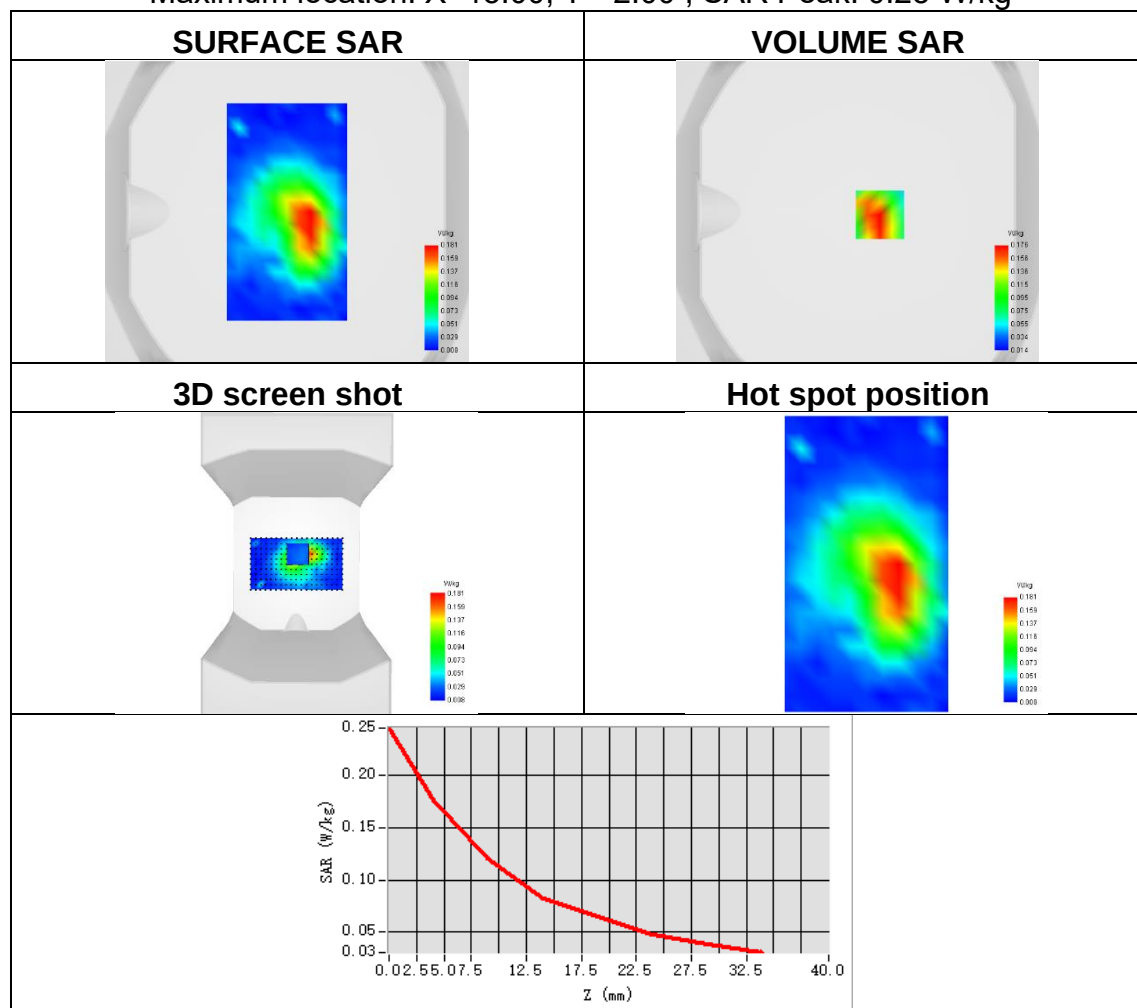




Plot 61:

Test Date	2025-09-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.240
SAR 1g (W/Kg)	0.352
ConvF	1.08
Relative permittivity	41.77
Conductivity (S/m)	0.87

Maximum location: X=-45.00, Y=-44.00 ; SAR Peak: 0.56 W/kg

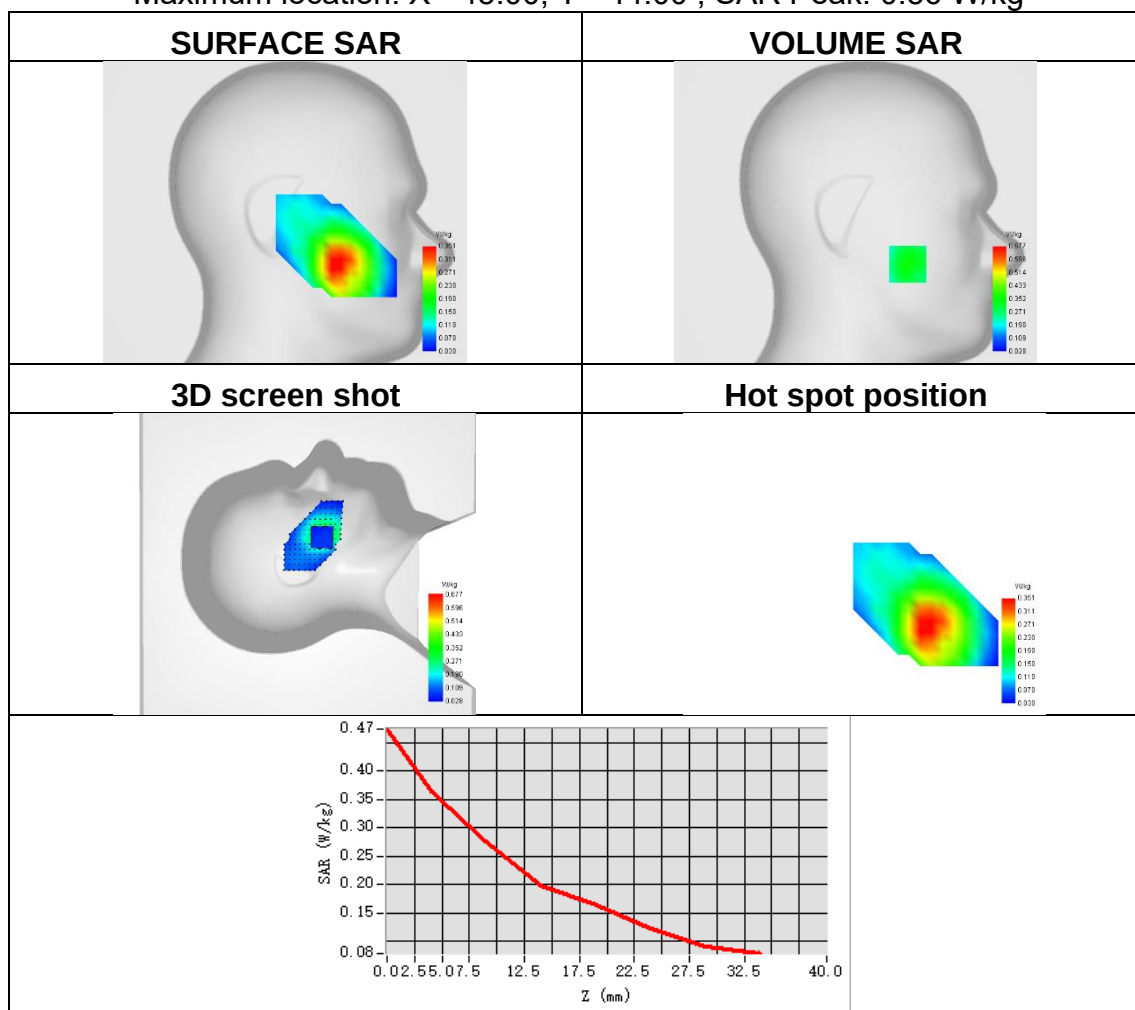




Plot 62:

Test Date	2025-09-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.355
SAR 1g (W/Kg)	0.587
ConvF	1.08
Relative permittivity	41.77
Conductivity (S/m)	0.87

Maximum location: X=2.00, Y=0.00 ; SAR Peak: 0.88 W/kg

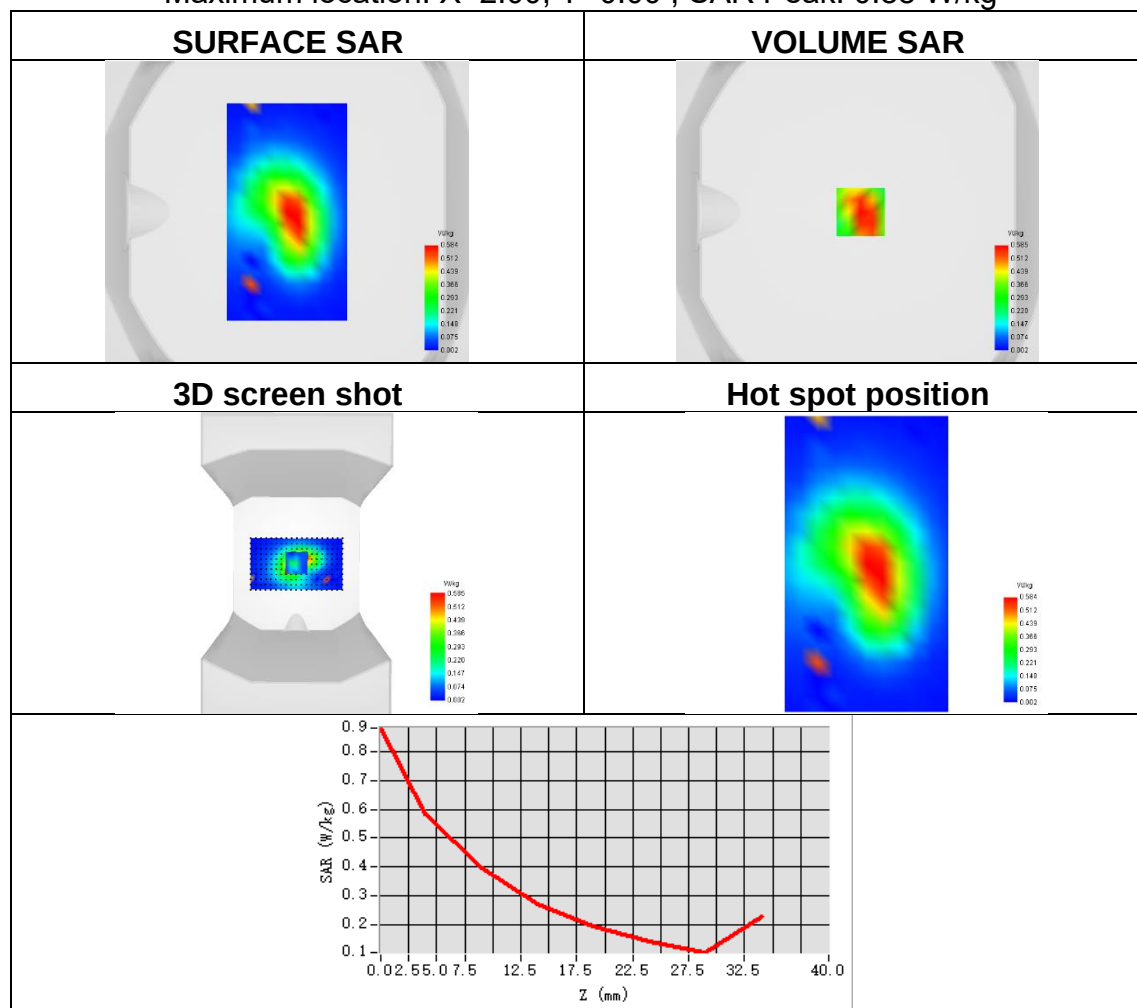




Plot 63:

Test Date	2025-09-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 17
Signal	LTE FDD
Frequency	709
SAR 10g (W/Kg)	0.073
SAR 1g (W/Kg)	0.108
ConvF	1.08
Relative permittivity	41.77
Conductivity (S/m)	0.87

Maximum location: X=-41.00, Y=-26.00 ; SAR Peak: 0.15 W/kg

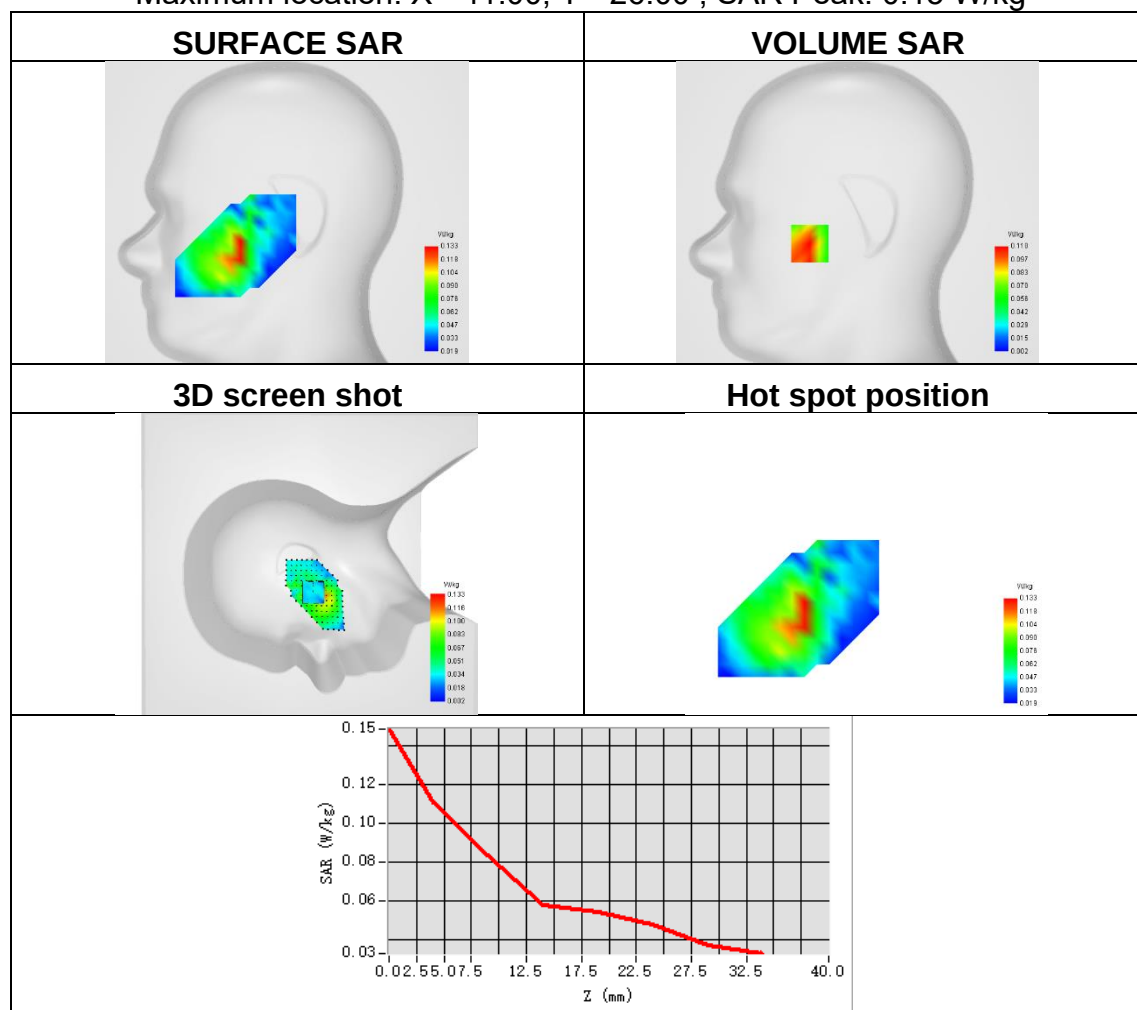




Plot 64:

Test Date	2025-09-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 17
Signal	LTE FDD
Frequency	709
SAR 10g (W/Kg)	0.114
SAR 1g (W/Kg)	0.185
ConvF	1.08
Relative permittivity	41.77
Conductivity (S/m)	0.87

Maximum location: X=18.00, Y=-5.00 ; SAR Peak: 0.25 W/kg

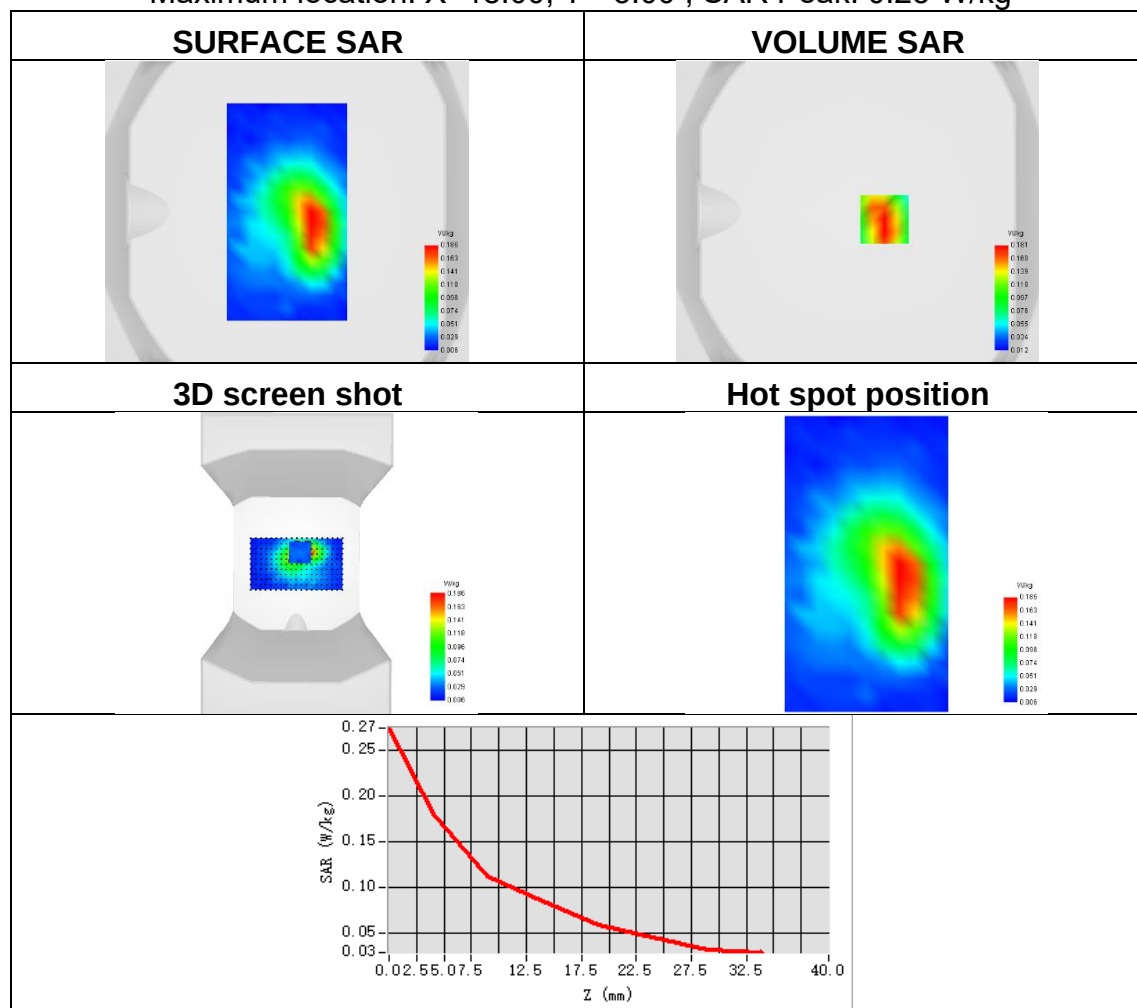




Plot 65:

Test Date	2025-09-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 25
Signal	LTE FDD
Frequency	1905
SAR 10g (W/Kg)	0.016
SAR 1g (W/Kg)	0.028
ConvF	1.34
Relative permittivity	40.69
Conductivity (S/m)	1.42

Maximum location: X=-48.00, Y=-42.00 ; SAR Peak: 0.05 W/kg

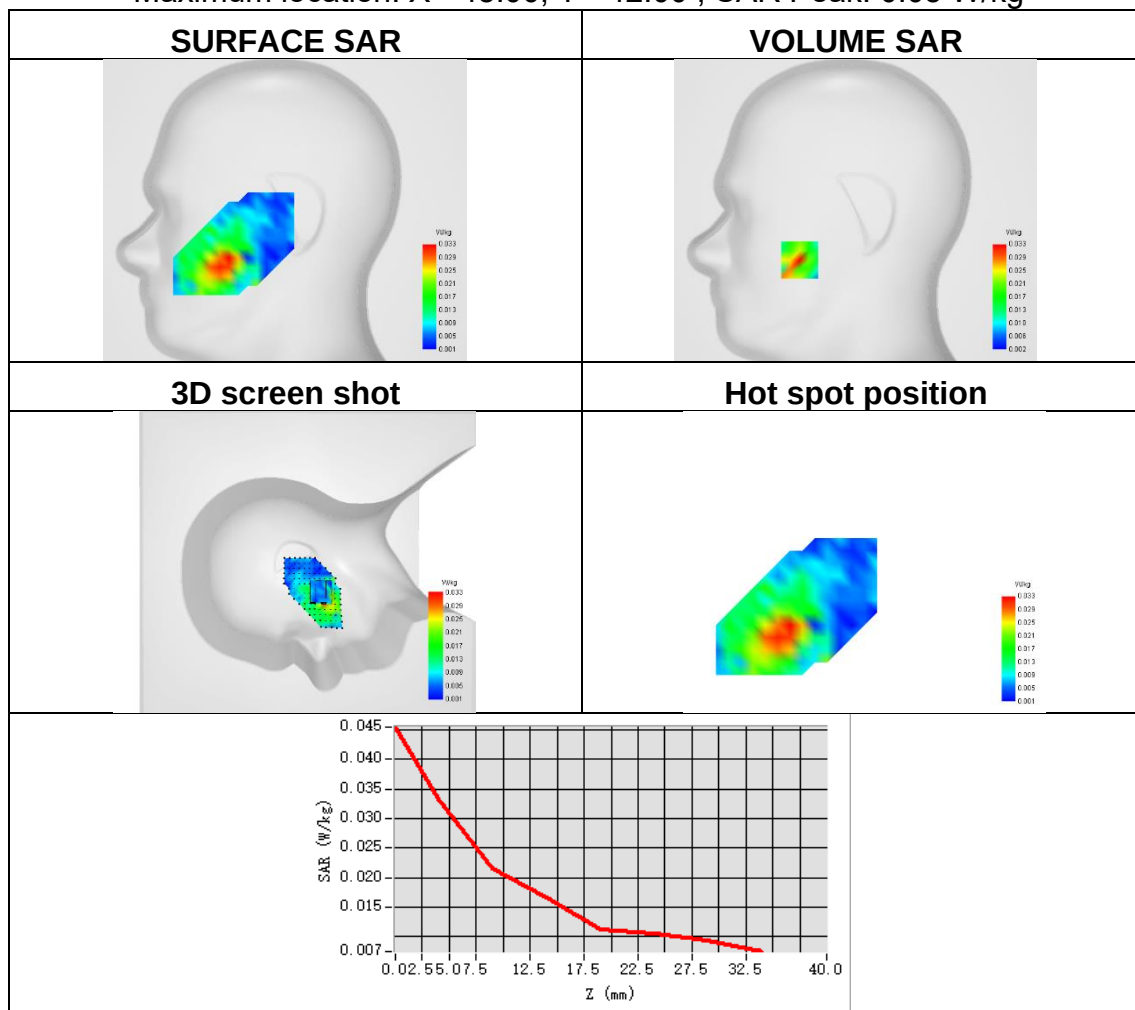




Plot 66:

Test Date	2025-09-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 25
Signal	LTE FDD
Frequency	1905
SAR 10g (W/Kg)	0.077
SAR 1g (W/Kg)	0.137
ConvF	1.34
Relative permittivity	40.69
Conductivity (S/m)	1.42

Maximum location: X=7.00, Y=17.00 ; SAR Peak: 0.21 W/kg

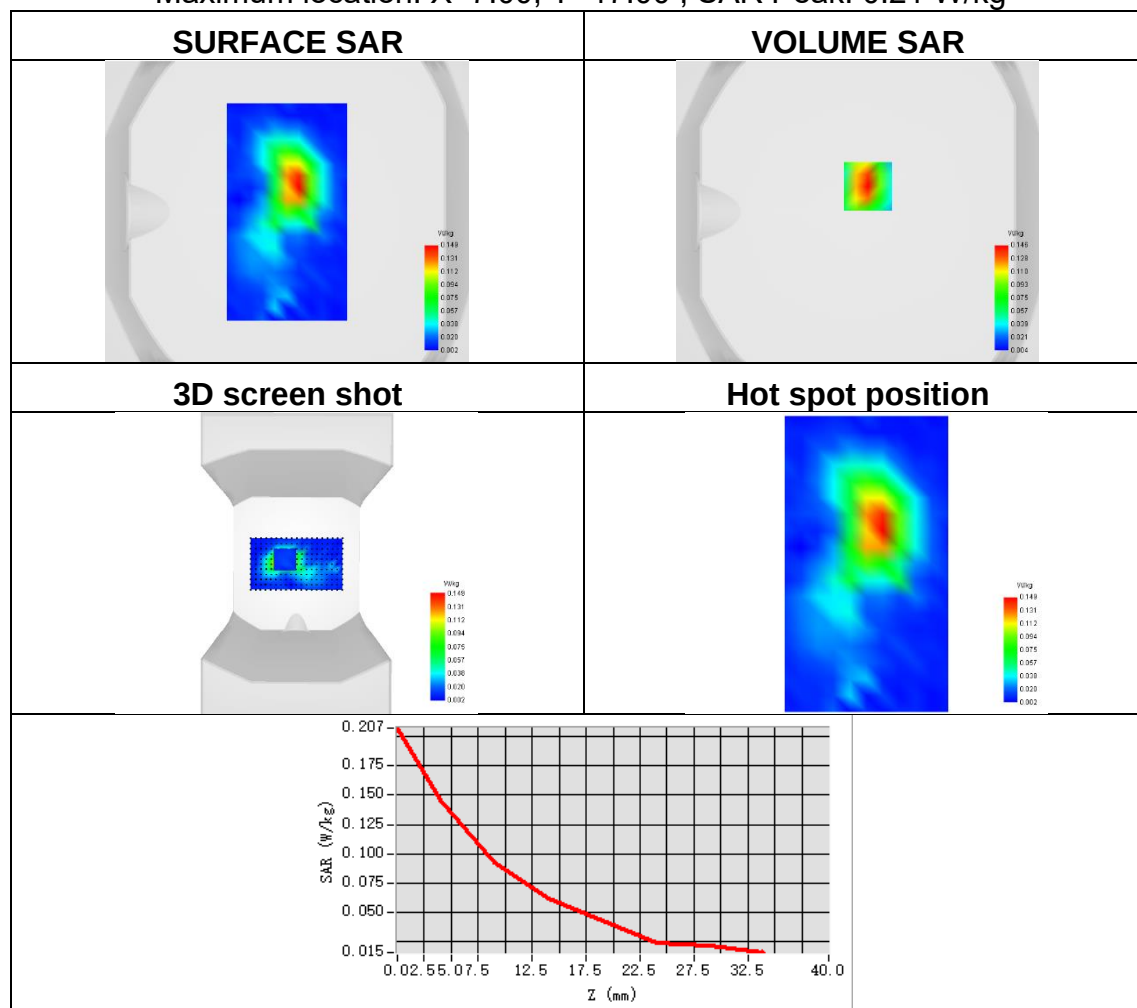




Plot 67:

Test Date	2025-09-17
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 26
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.369
SAR 1g (W/Kg)	0.528
ConvF	1.02
Relative permittivity	41.86
Conductivity (S/m)	0.91

Maximum location: X=-47.00, Y=-54.00 ; SAR Peak: 0.72 W/kg

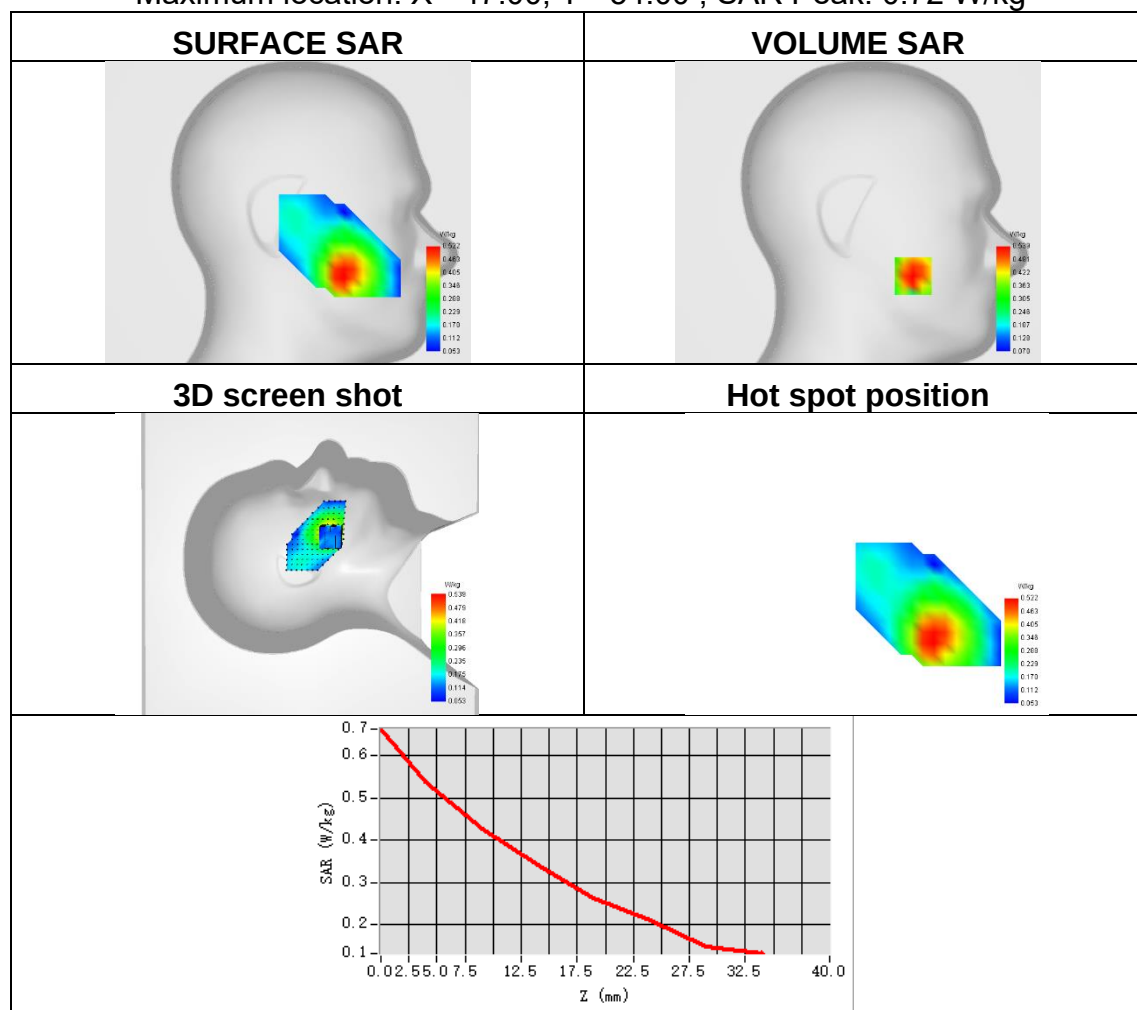




Plot 68:

Test Date	2025-09-17
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 26
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.603
SAR 1g (W/Kg)	0.953
ConvF	1.02
Relative permittivity	41.86
Conductivity (S/m)	0.91

Maximum location: X=7.00, Y=-1.00 ; SAR Peak: 1.40 W/kg

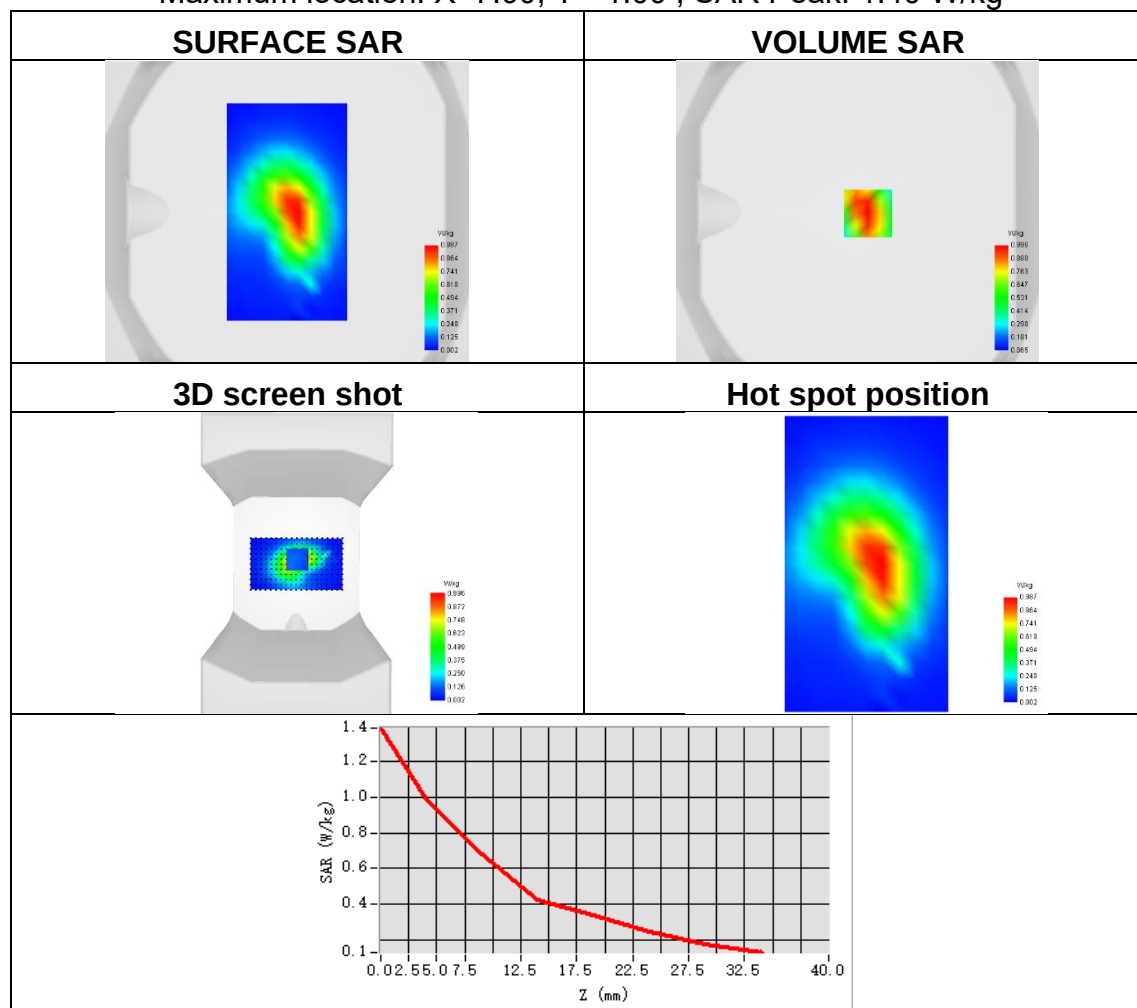




Plot 69:

Test Date	2025-09-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 38
Signal	LTE TDD
Frequency	2610
SAR 10g (W/Kg)	0.158
SAR 1g (W/Kg)	0.276
ConvF	1.44
Relative permittivity	39.75
Conductivity (S/m)	1.98

Maximum location: X=-8.00, Y=-8.00 ; SAR Peak: 0.45 W/kg

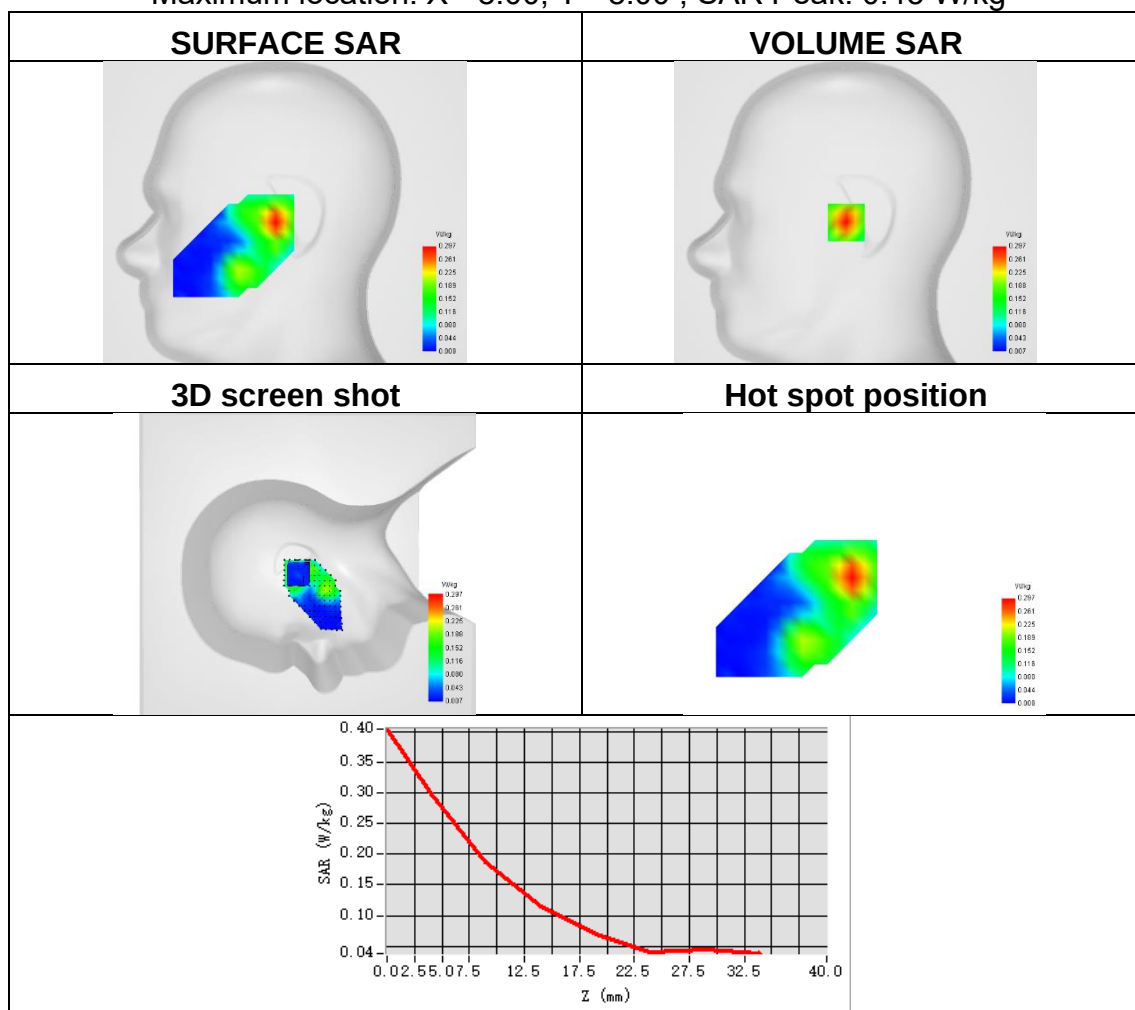




Plot 70:

Test Date	2025-09-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 38
Signal	LTE TDD
Frequency	2610
SAR 10g (W/Kg)	0.427
SAR 1g (W/Kg)	0.786
ConvF	1.44
Relative permittivity	39.75
Conductivity (S/m)	1.98

Maximum location: X=-8.00, Y=48.00 ; SAR Peak: 1.22 W/kg

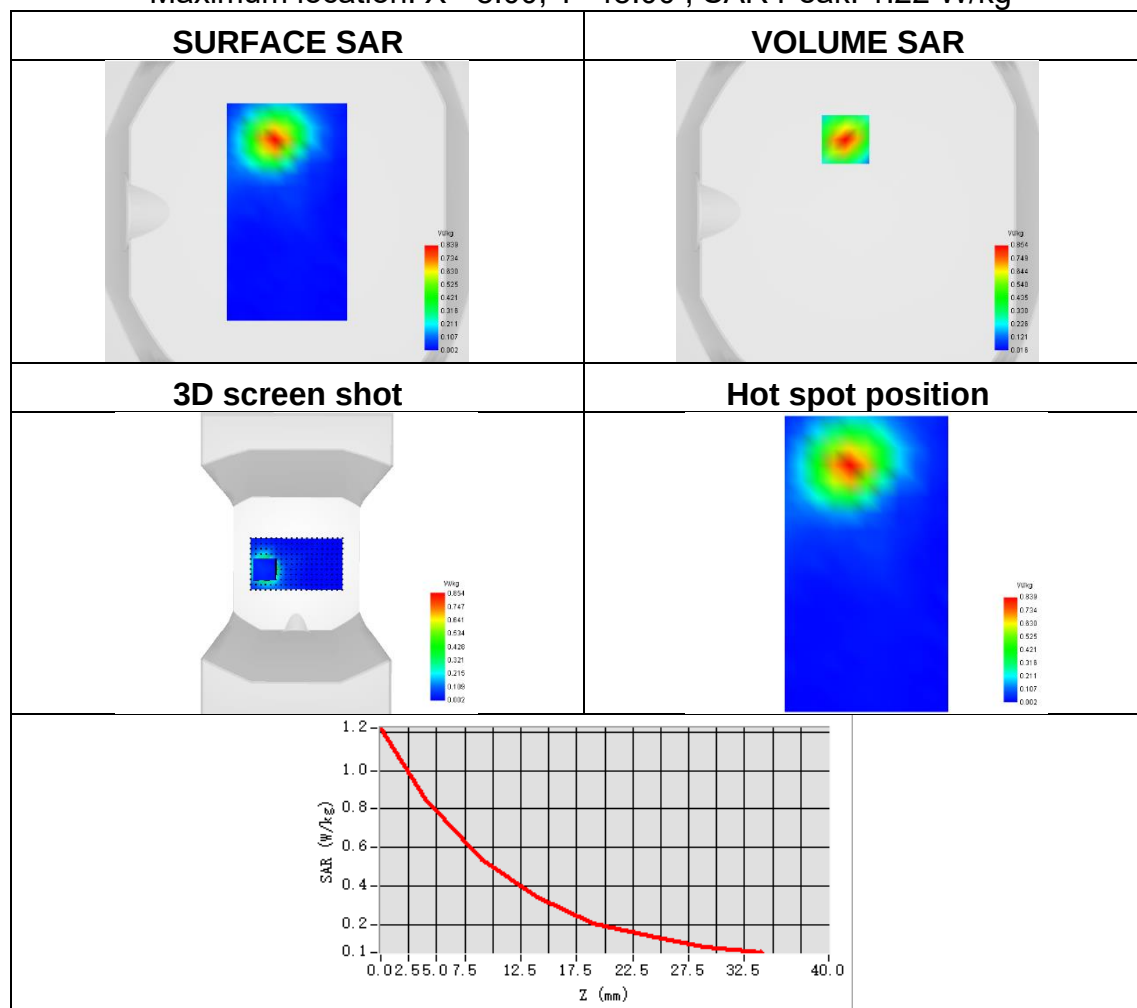




Plot 71:

Test Date	2025-09-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 40
Signal	LTE TDD
Frequency	2350
SAR 10g (W/Kg)	0.025
SAR 1g (W/Kg)	0.046
ConvF	1.47
Relative permittivity	40.09
Conductivity (S/m)	1.39

Maximum location: X=-5.00, Y=-1.00 ; SAR Peak: 0.10 W/kg

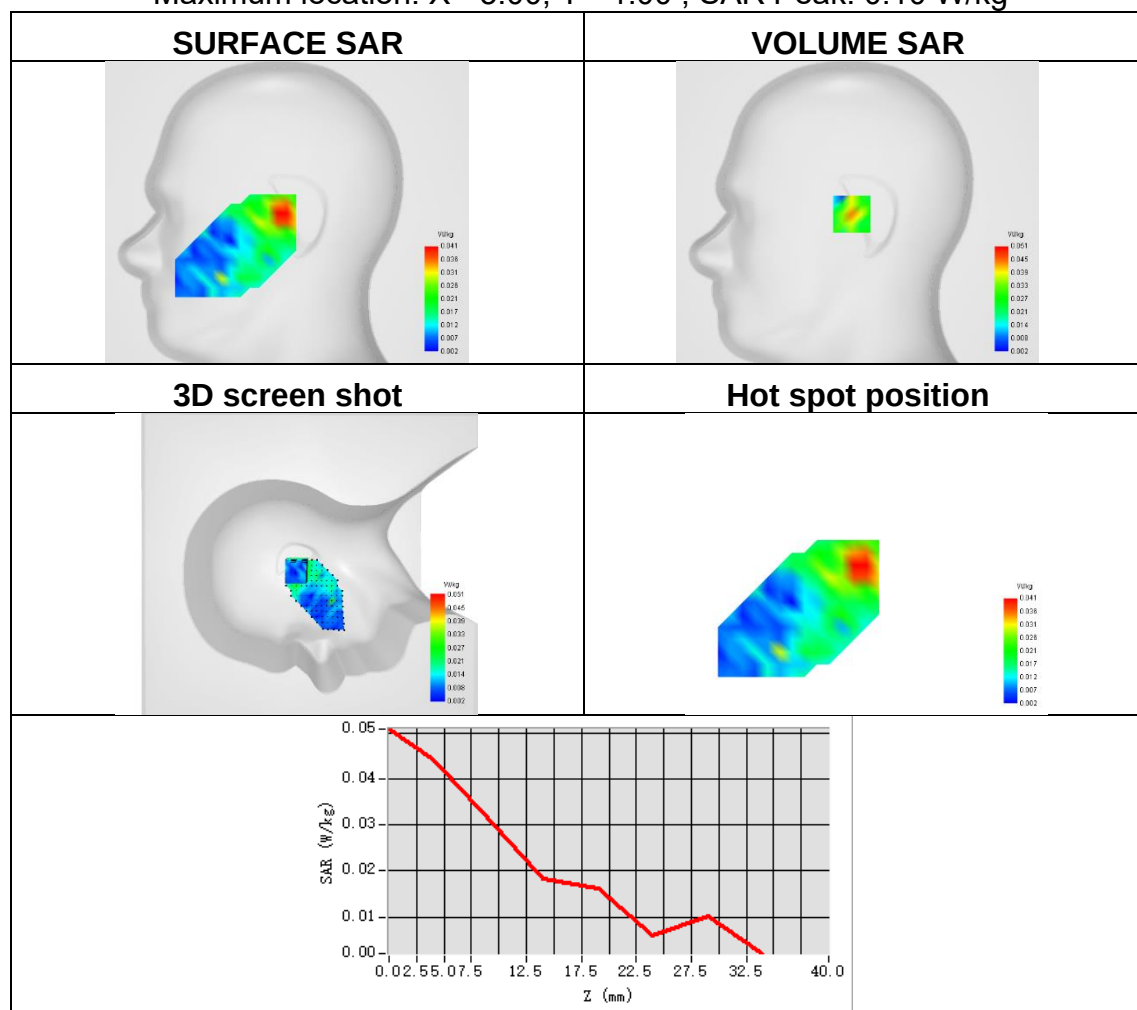




Plot 72:

Test Date	2025-09-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 40
Signal	LTE TDD
Frequency	2350
SAR 10g (W/Kg)	0.055
SAR 1g (W/Kg)	0.112
ConvF	1.47
Relative permittivity	40.09
Conductivity (S/m)	1.39

Maximum location: X=-1.00, Y=24.00 ; SAR Peak: 0.20 W/kg

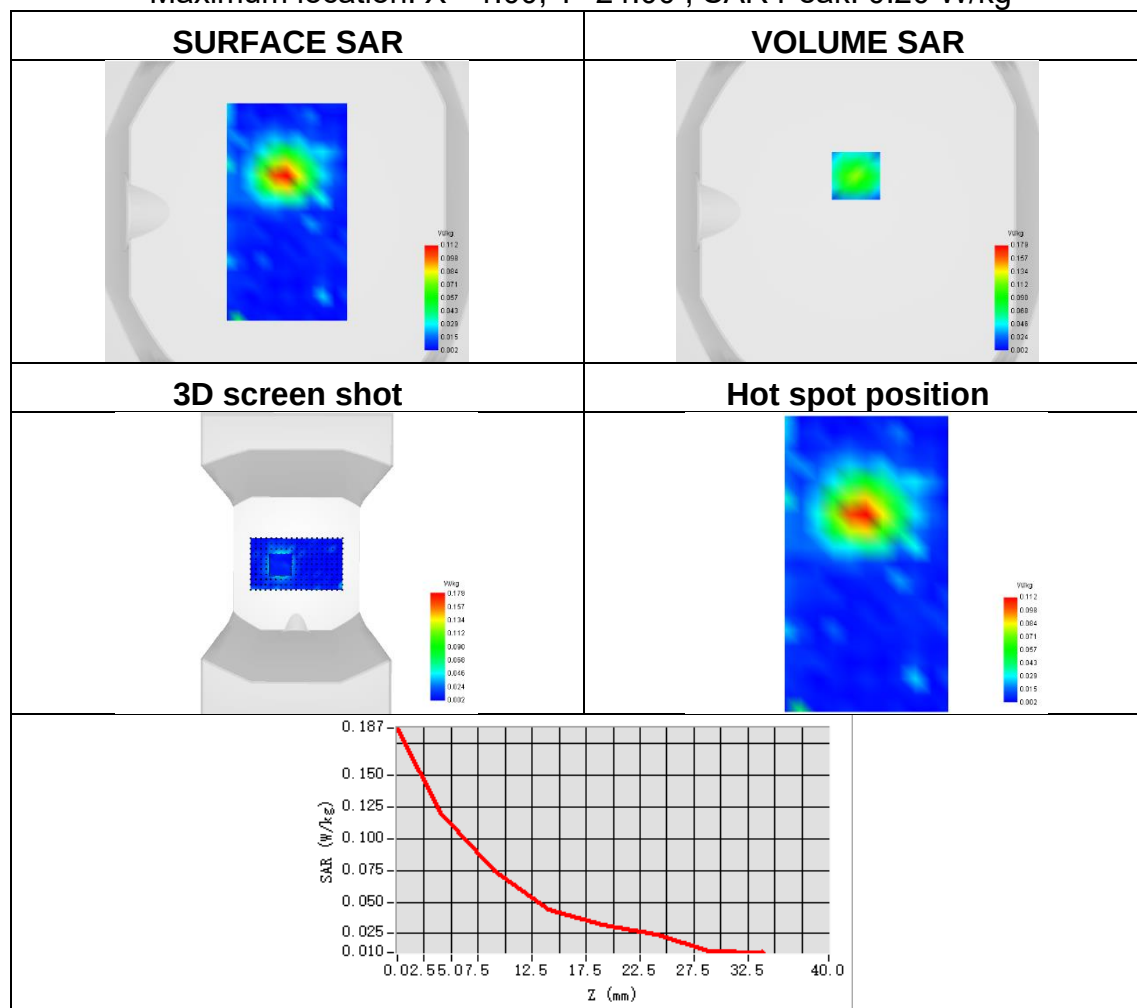




Plot 73:

Test Date	2025-09-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 41
Signal	LTE TDD
Frequency	2506
SAR 10g (W/Kg)	0.120
SAR 1g (W/Kg)	0.209
ConvF	1.44
Relative permittivity	39.47
Conductivity (S/m)	1.94

Maximum location: X=-8.00, Y=-8.00 ; SAR Peak: 0.33 W/kg

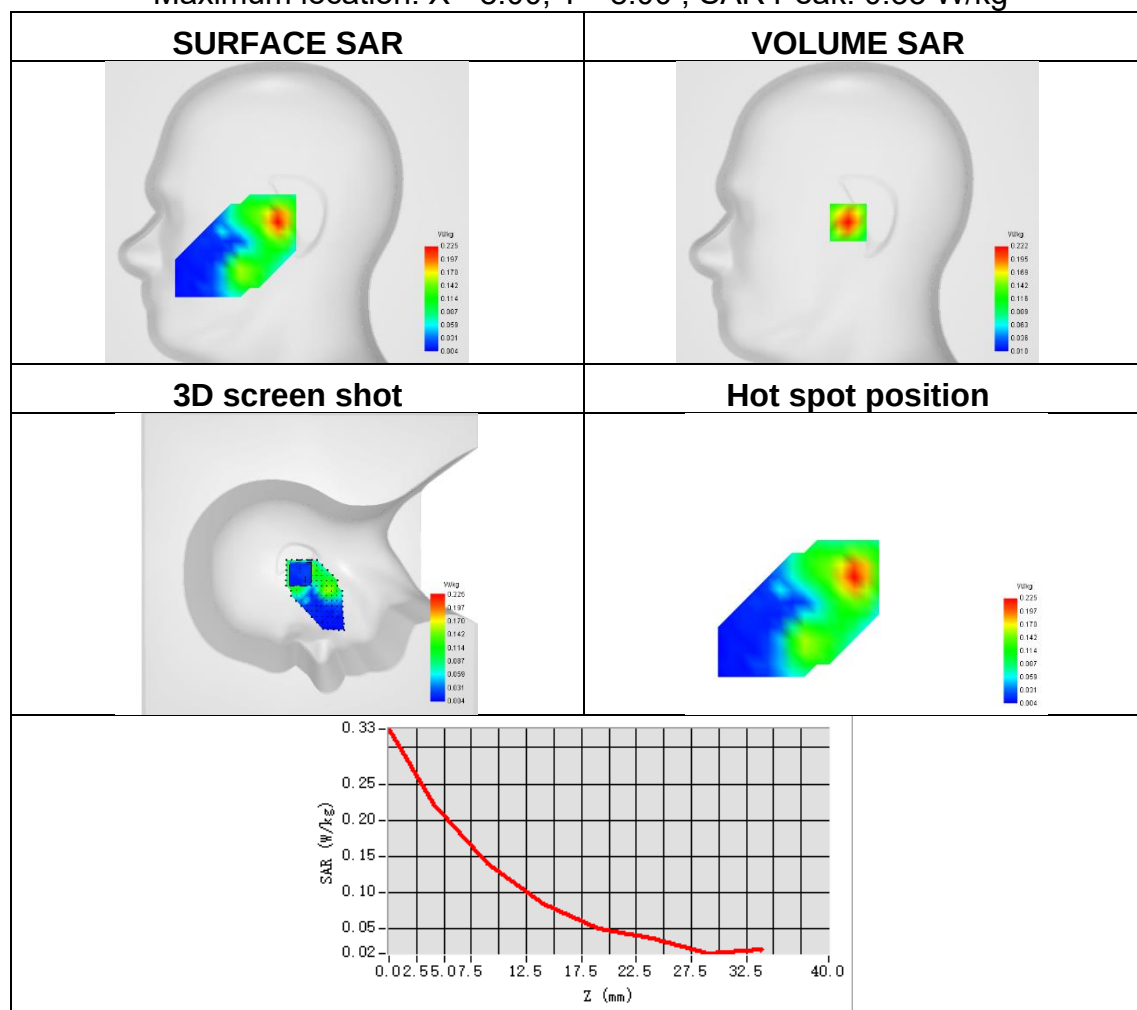




Plot 74:

Test Date	2025-09-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 41
Signal	LTE TDD
Frequency	2506
SAR 10g (W/Kg)	0.313
SAR 1g (W/Kg)	0.574
ConvF	1.44
Relative permittivity	39.47
Conductivity (S/m)	1.94

Maximum location: X=0.00, Y=23.00 ; SAR Peak: 0.89 W/kg

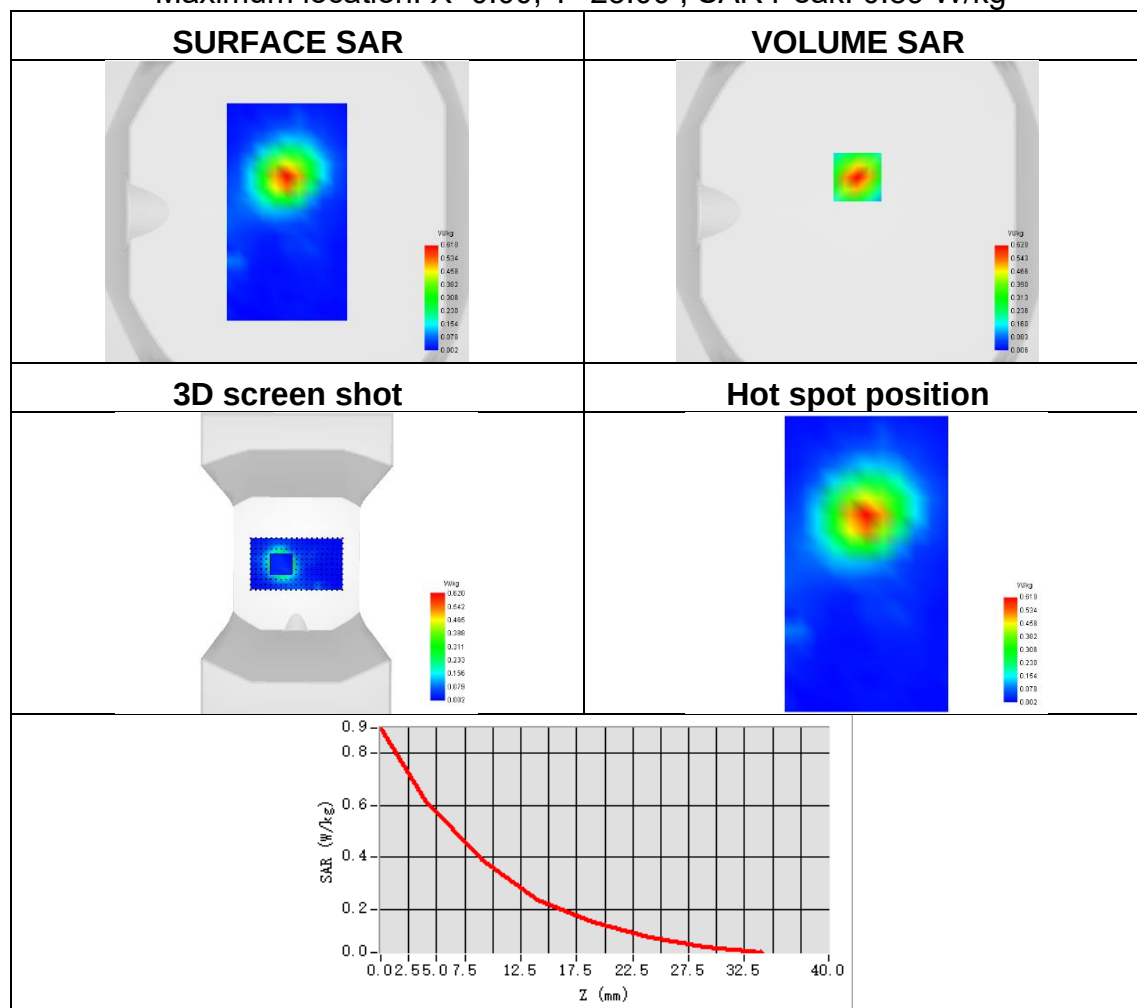




Plot 75:

Test Date	2025-09-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 66
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.040
SAR 1g (W/Kg)	0.084
ConvF	1.21
Relative permittivity	40.89
Conductivity (S/m)	1.44

Maximum location: X=-52.00, Y=-50.00 ; SAR Peak: 0.44 W/kg

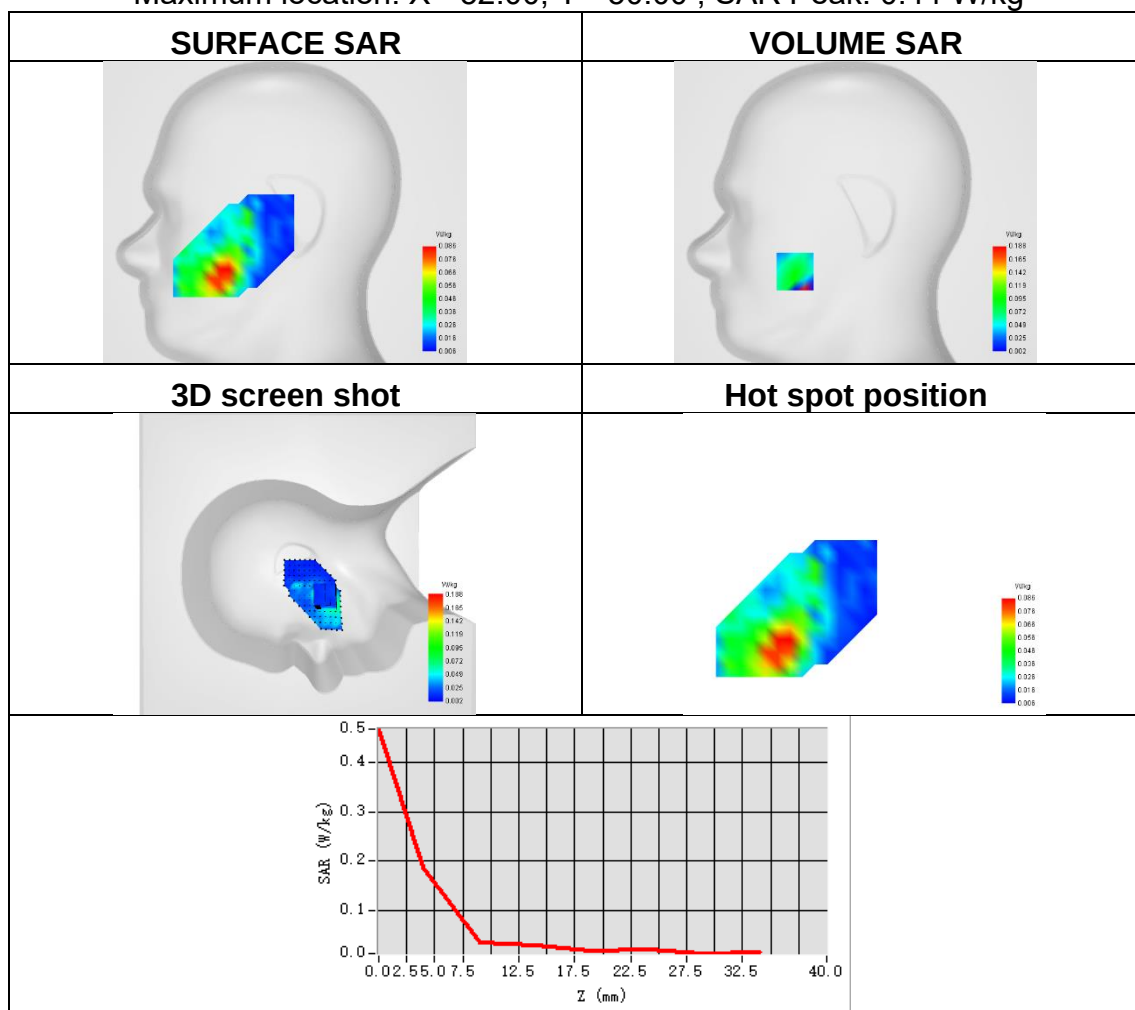




Plot 76:

Test Date	2025-09-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.316
SAR 1g (W/Kg)	0.519
ConvF	1.21
Relative permittivity	40.89
Conductivity (S/m)	1.44

Maximum location: X=2.00, Y=9.00 ; SAR Peak: 0.74 W/kg

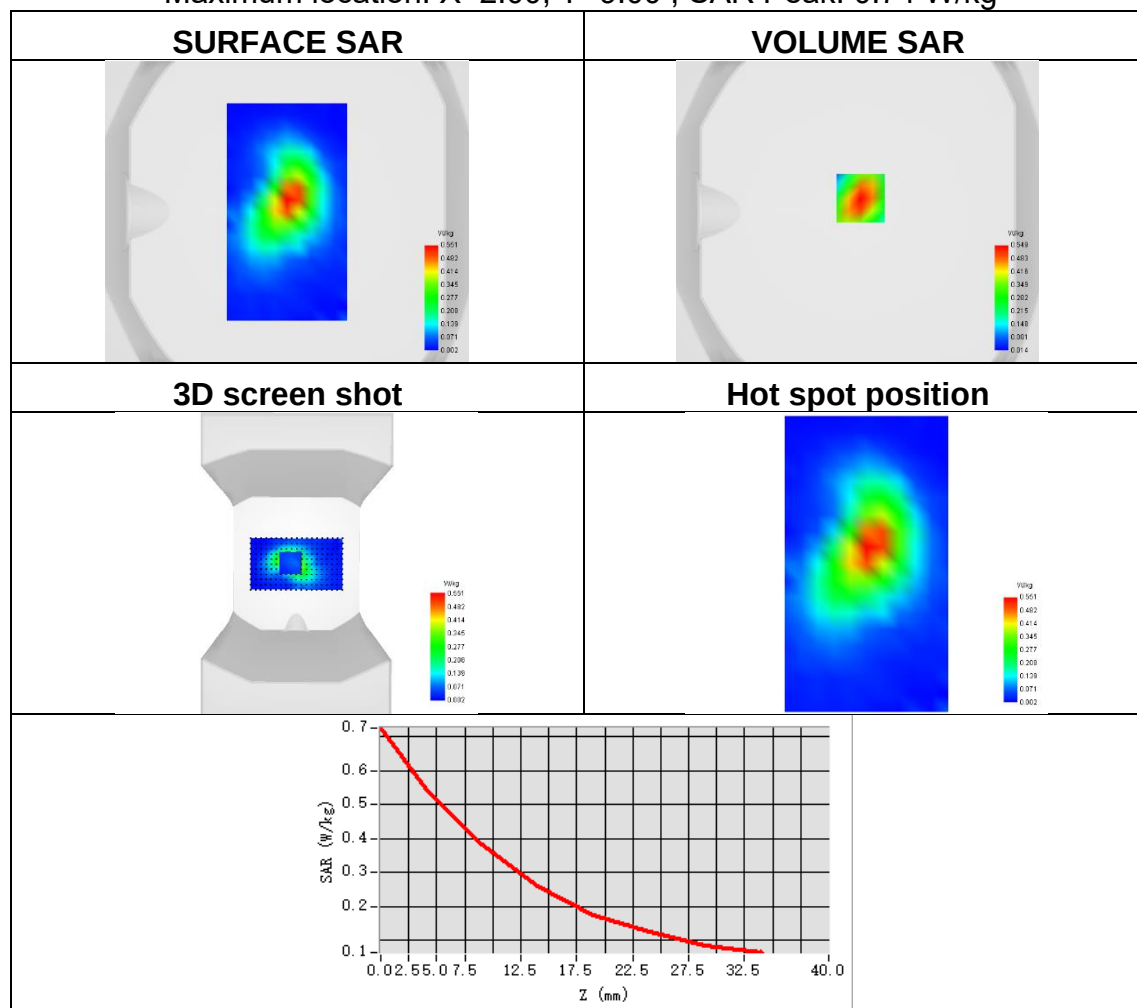




Plot 77:

Test Date	2025-09-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 2
Signal	NR FDD
Frequency	1860
SAR 10g (W/Kg)	0.063
SAR 1g (W/Kg)	0.157
ConvF	1.34
Relative permittivity	40.41
Conductivity (S/m)	1.38

Maximum location: X=-41.00, Y=-48.00 ; SAR Peak: 0.38 W/kg

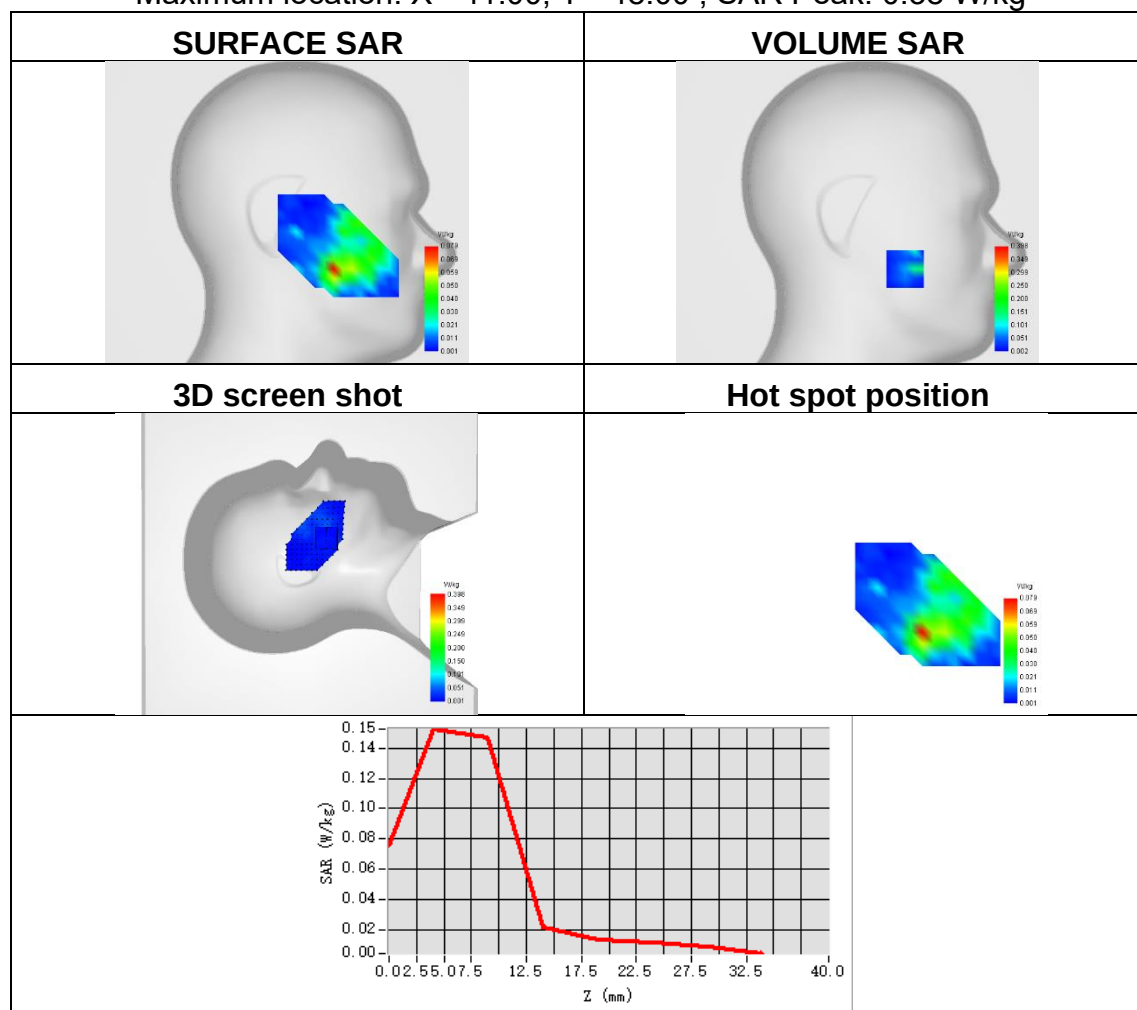




Plot 78:

Test Date	2025-09-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 2
Signal	NR FDD
Frequency	1860
SAR 10g (W/Kg)	0.118
SAR 1g (W/Kg)	0.343
ConvF	1.34
Relative permittivity	40.41
Conductivity (S/m)	1.38

Maximum location: X=9.00, Y=8.00 ; SAR Peak: 0.90 W/kg

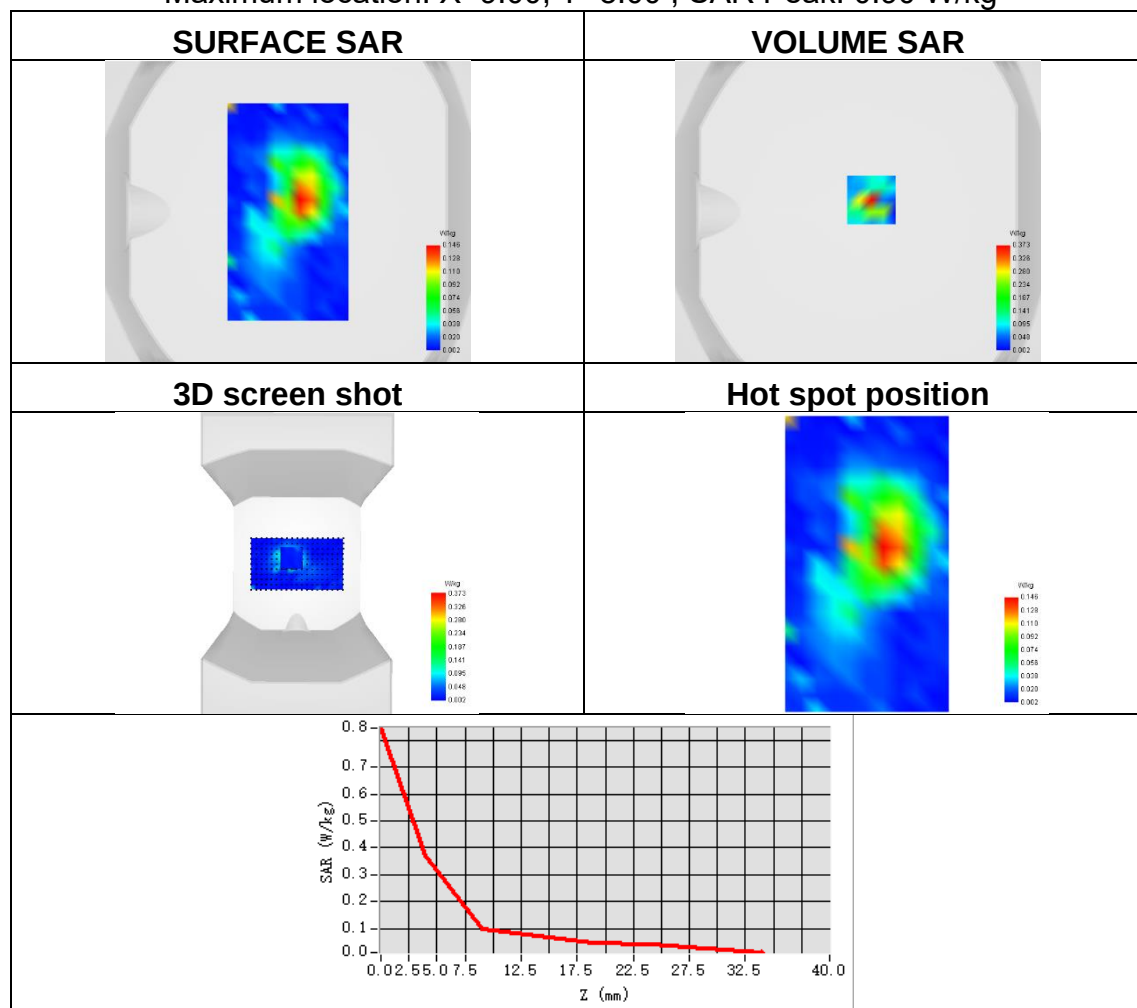




Plot 79:

Test Date	2025-09-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	NR band 5
Signal	NR FDD
Frequency	834
SAR 10g (W/Kg)	0.291
SAR 1g (W/Kg)	0.430
ConvF	1.02
Relative permittivity	41.42
Conductivity (S/m)	0.86

Maximum location: X=-63.00, Y=-39.00 ; SAR Peak: 0.63 W/kg

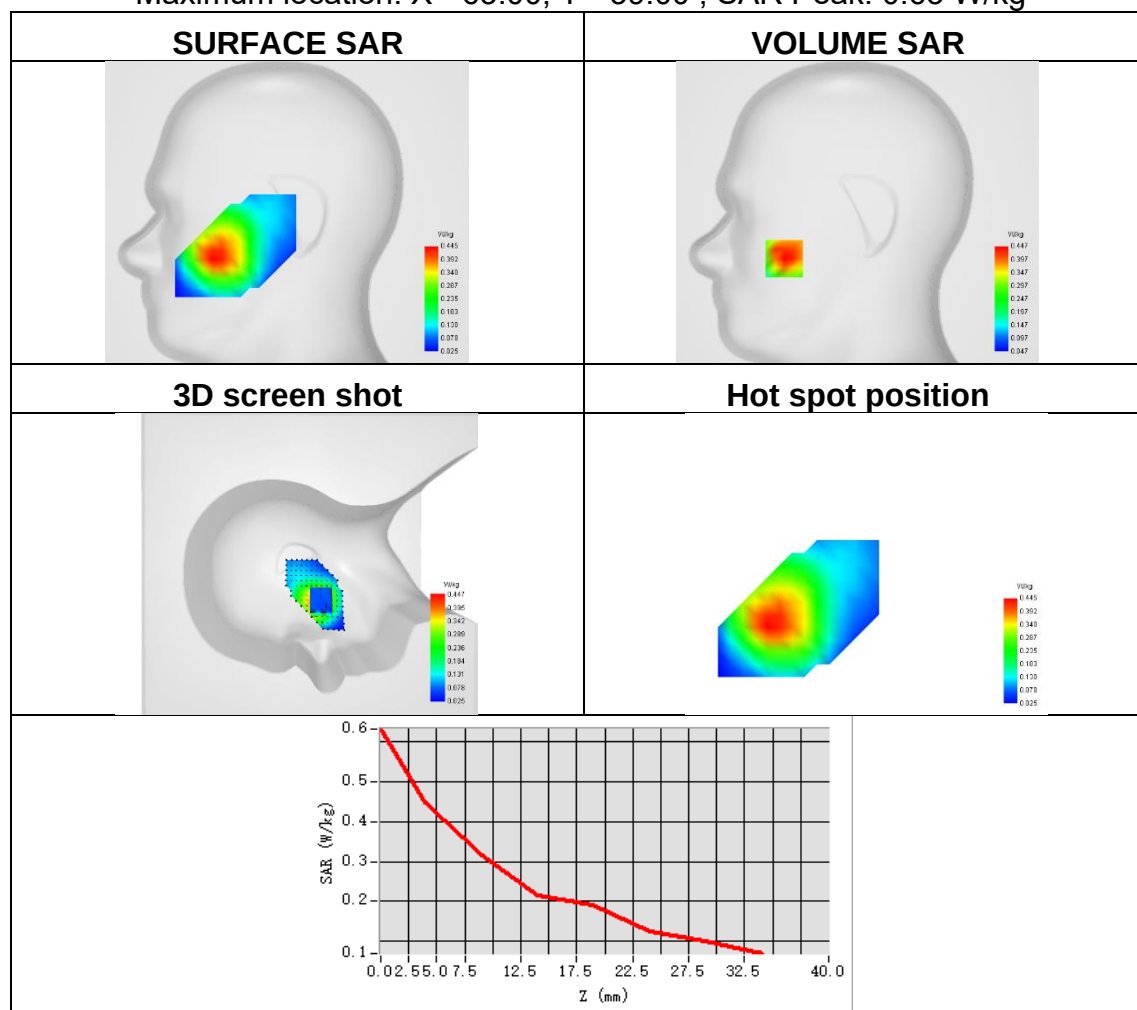




Plot 80:

Test Date	2025-09-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 5
Signal	NR FDD
Frequency	834
SAR 10g (W/Kg)	0.614
SAR 1g (W/Kg)	0.954
ConvF	1.02
Relative permittivity	41.42
Conductivity (S/m)	0.86

Maximum location: X=17.00, Y=-8.00 ; SAR Peak: 1.35 W/kg

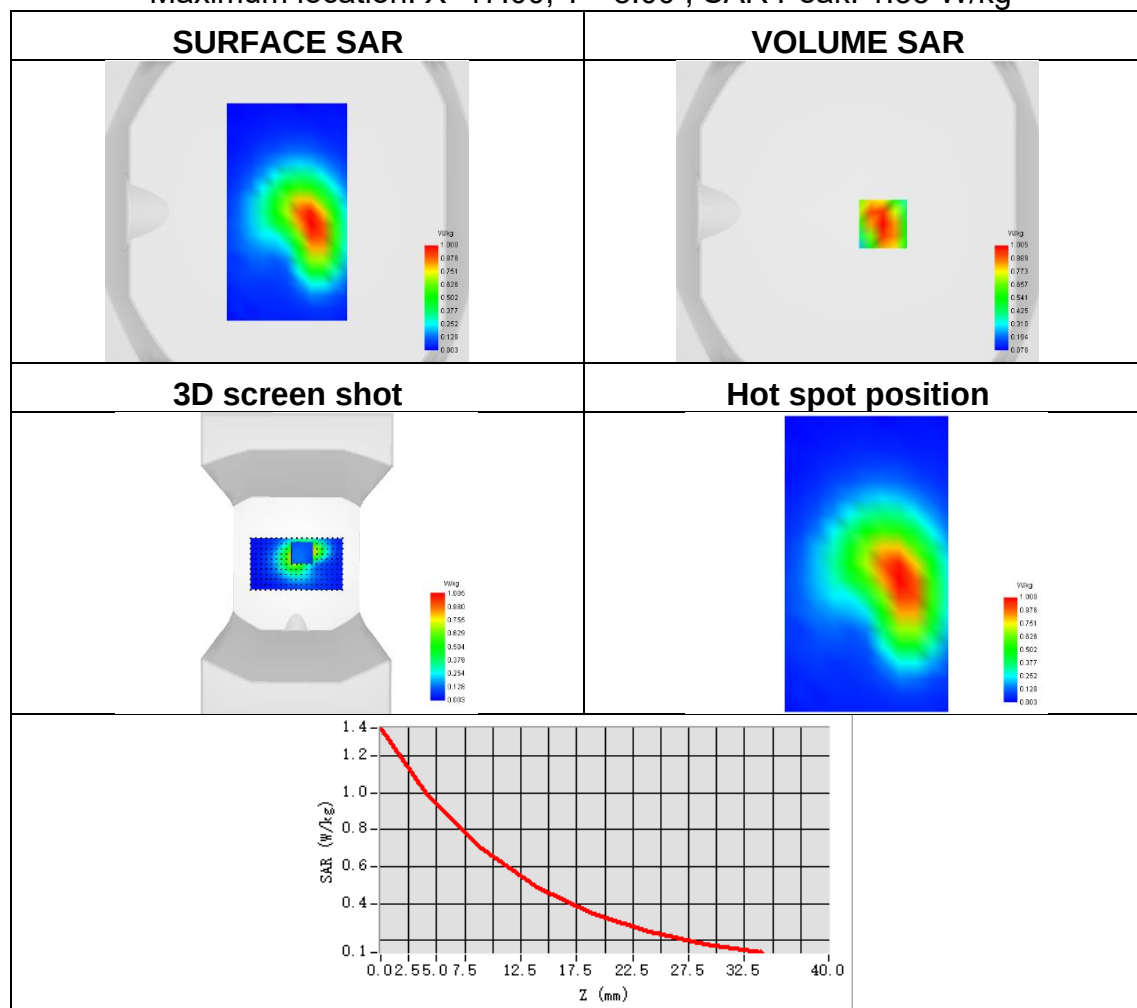




Plot 81:

Test Date	2025-09-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 7
Signal	NR FDD
Frequency	2510
SAR 10g (W/Kg)	0.020
SAR 1g (W/Kg)	0.038
ConvF	1.44
Relative permittivity	39.47
Conductivity (S/m)	1.94

Maximum location: X=-33.00, Y=-17.00 ; SAR Peak: 0.07 W/kg

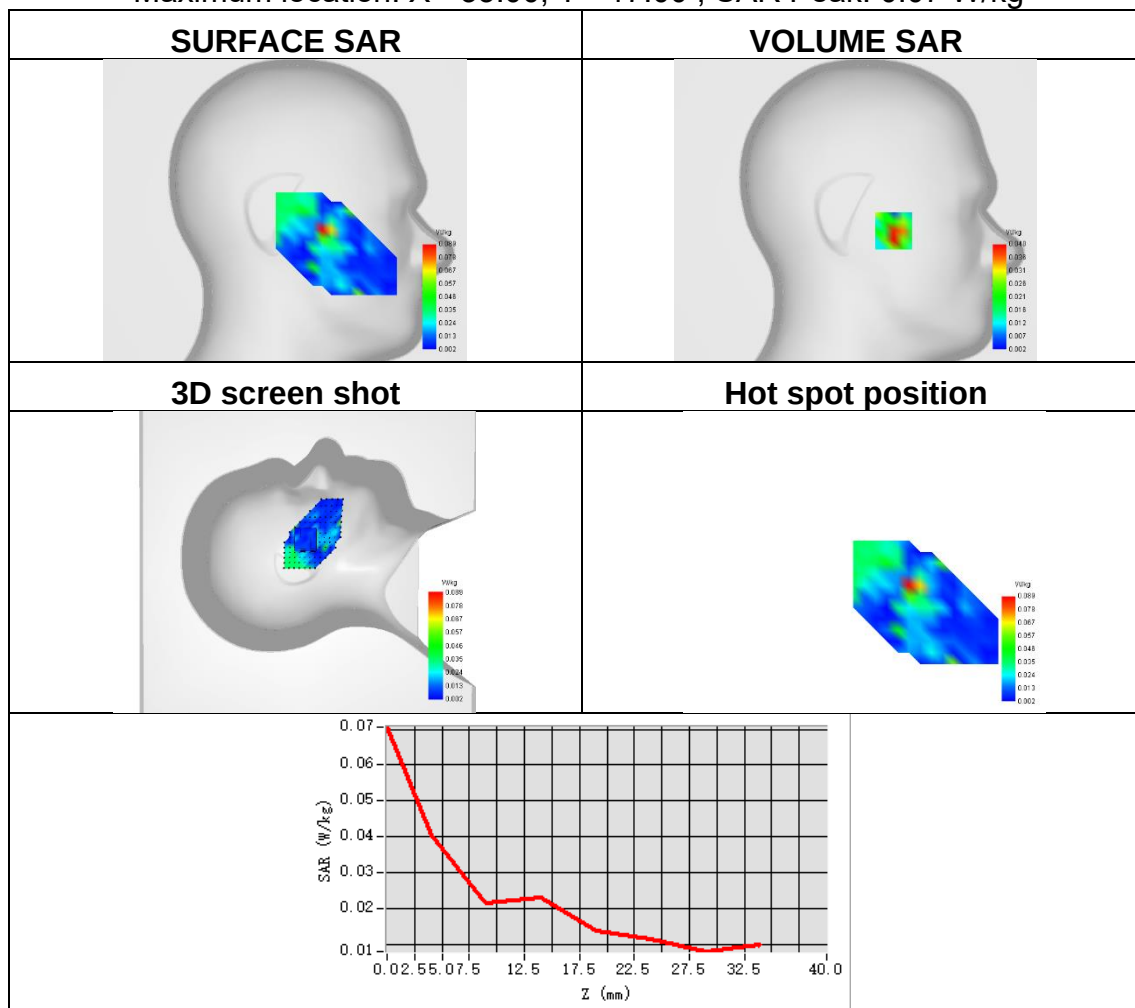




Plot 82:

Test Date	2025-09-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 7
Signal	NR FDD
Frequency	2510
SAR 10g (W/Kg)	0.363
SAR 1g (W/Kg)	0.667
ConvF	1.44
Relative permittivity	39.47
Conductivity (S/m)	1.94

Maximum location: X=15.00, Y=52.00 ; SAR Peak: 1.03 W/kg

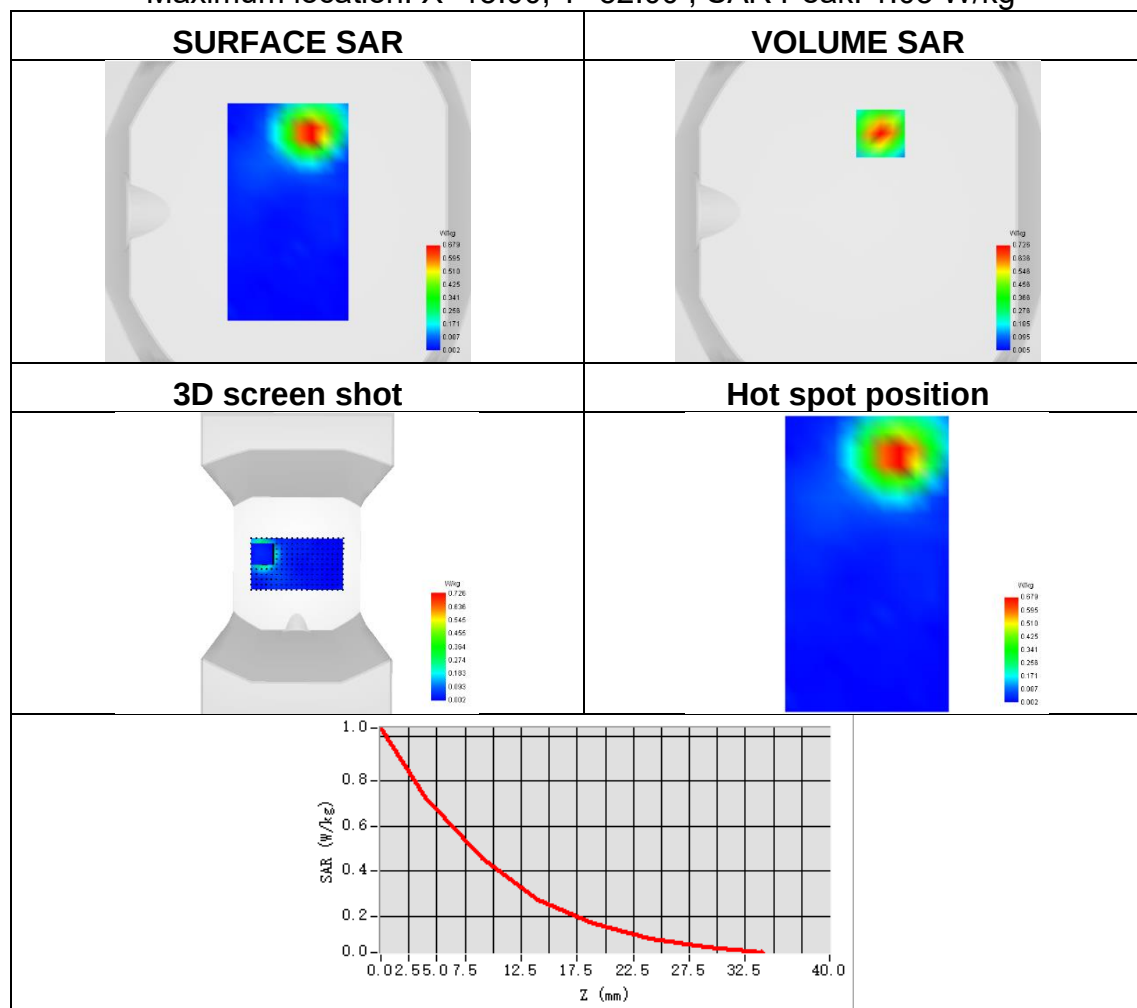




Plot 83:

Test Date	2025-09-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 25
Signal	NR FDD
Frequency	1882.5
SAR 10g (W/Kg)	0.023
SAR 1g (W/Kg)	0.046
ConvF	1.34
Relative permittivity	40.69
Conductivity (S/m)	1.42

Maximum location: X=-47.00, Y=-48.00 ; SAR Peak: 0.10 W/kg

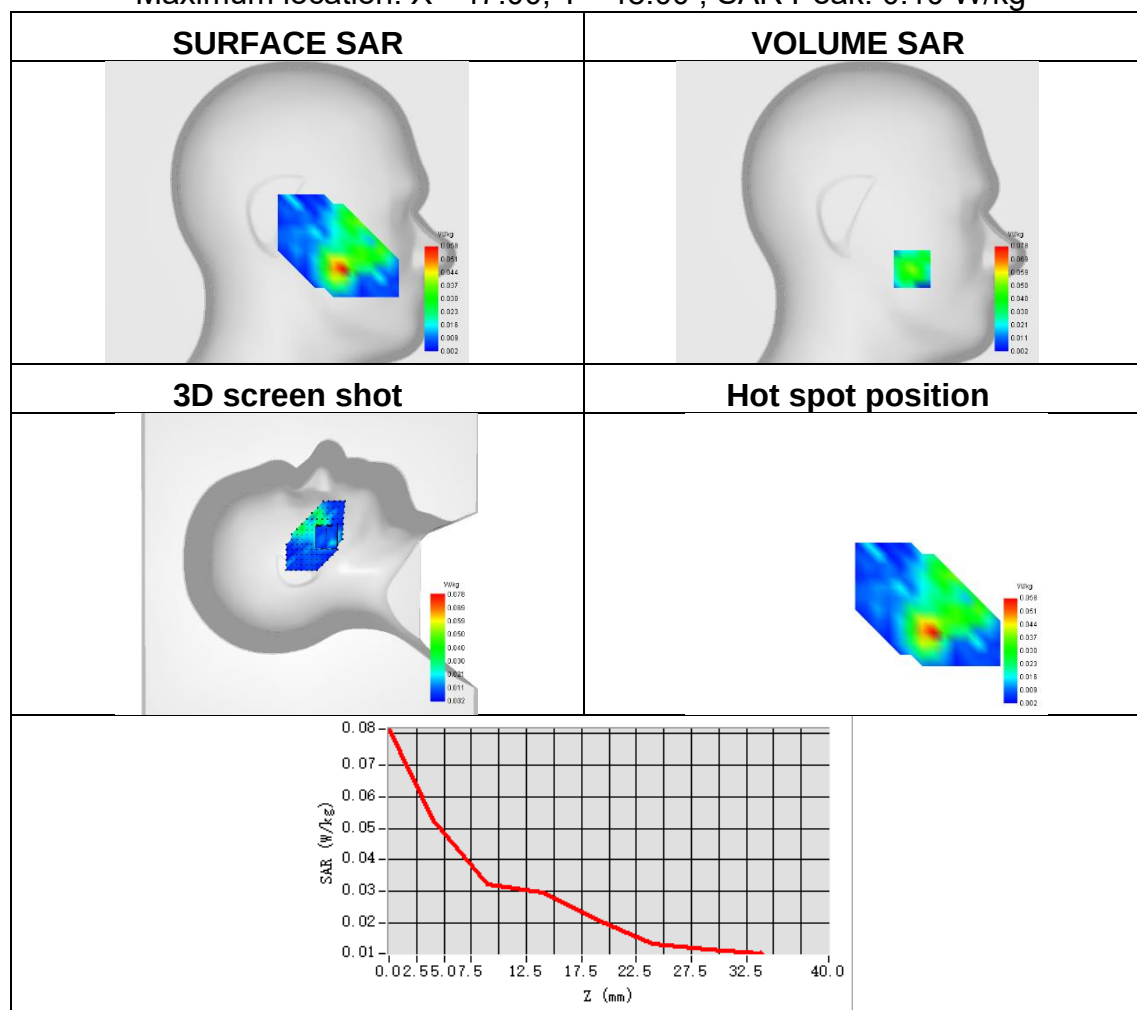




Plot 84:

Test Date	2025-09-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 25
Signal	NR FDD
Frequency	1882.5
SAR 10g (W/Kg)	0.075
SAR 1g (W/Kg)	0.127
ConvF	1.34
Relative permittivity	40.69
Conductivity (S/m)	1.42

Maximum location: X=15.00, Y=11.00 ; SAR Peak: 0.19 W/kg

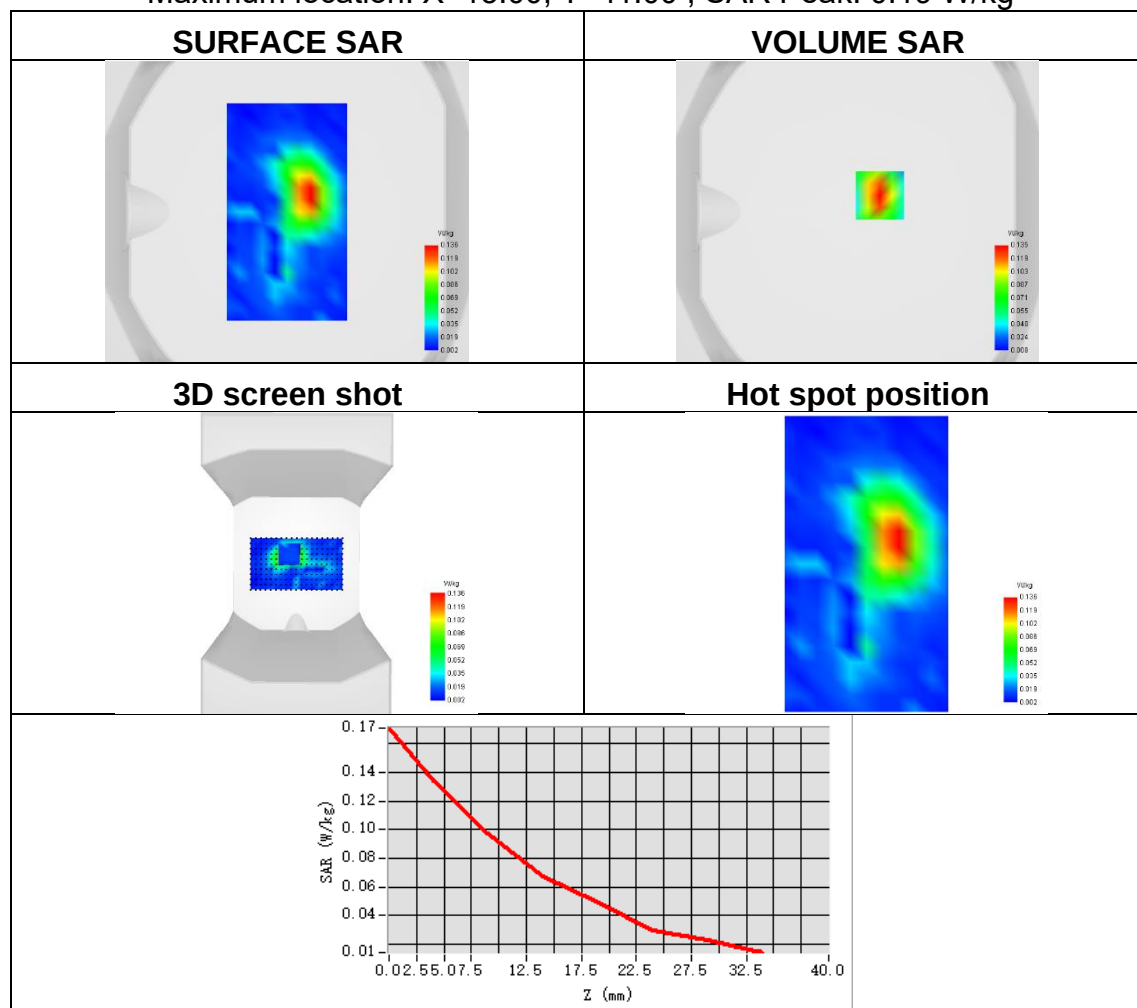




Plot 85:

Test Date	2025-09-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 38
Signal	NR TDD
Frequency	2600
SAR 10g (W/Kg)	0.177
SAR 1g (W/Kg)	0.363
ConvF	1.44
Relative permittivity	40.06
Conductivity (S/m)	1.90

Maximum location: X=-14.00, Y=-1.00 ; SAR Peak: 0.66 W/kg

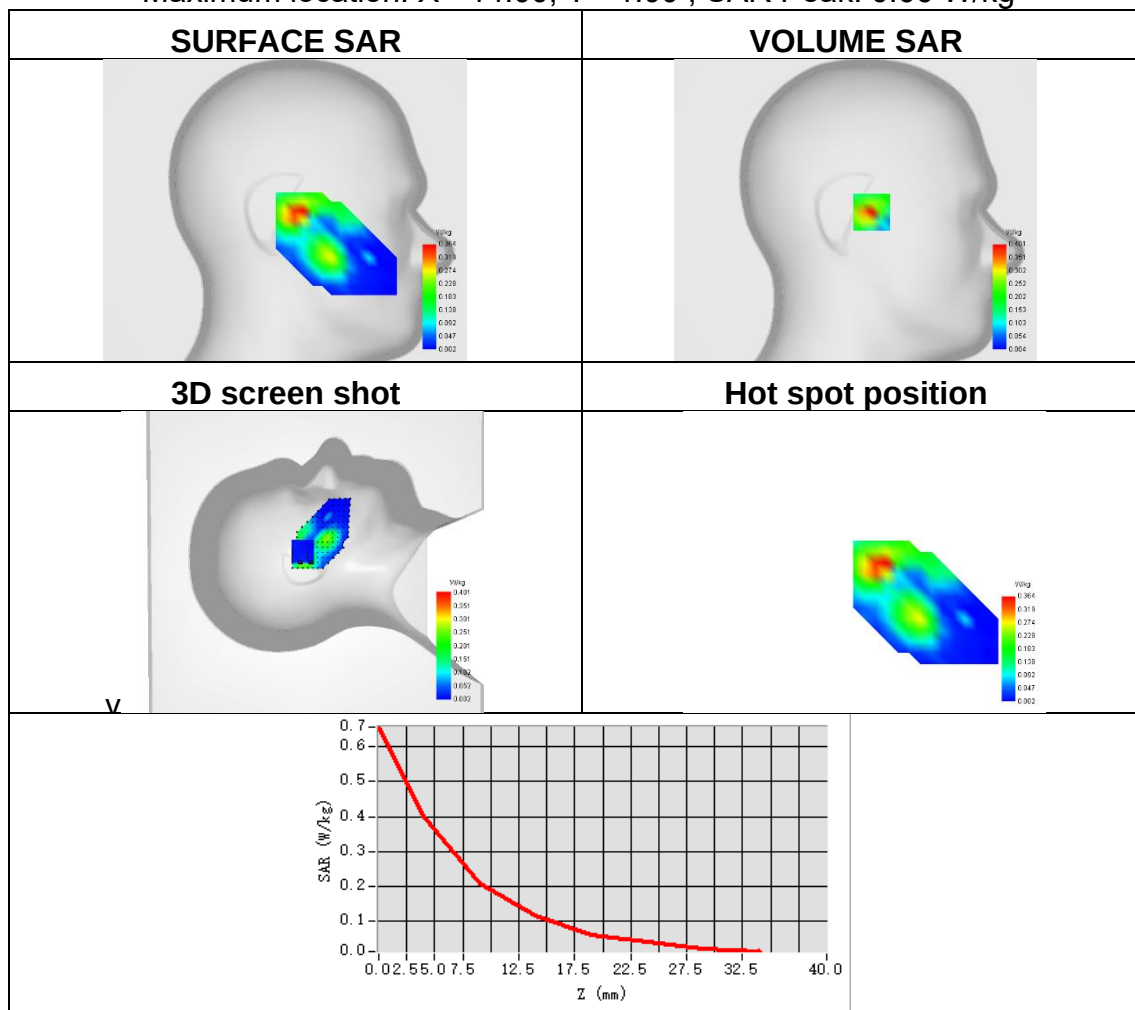




Plot 86:

Test Date	2025-09-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 38
Signal	NR TDD
Frequency	2600
SAR 10g (W/Kg)	0.455
SAR 1g (W/Kg)	0.825
ConvF	1.44
Relative permittivity	40.06
Conductivity (S/m)	1.90

Maximum location: X=7.00, Y=40.00 ; SAR Peak: 1.27 W/kg

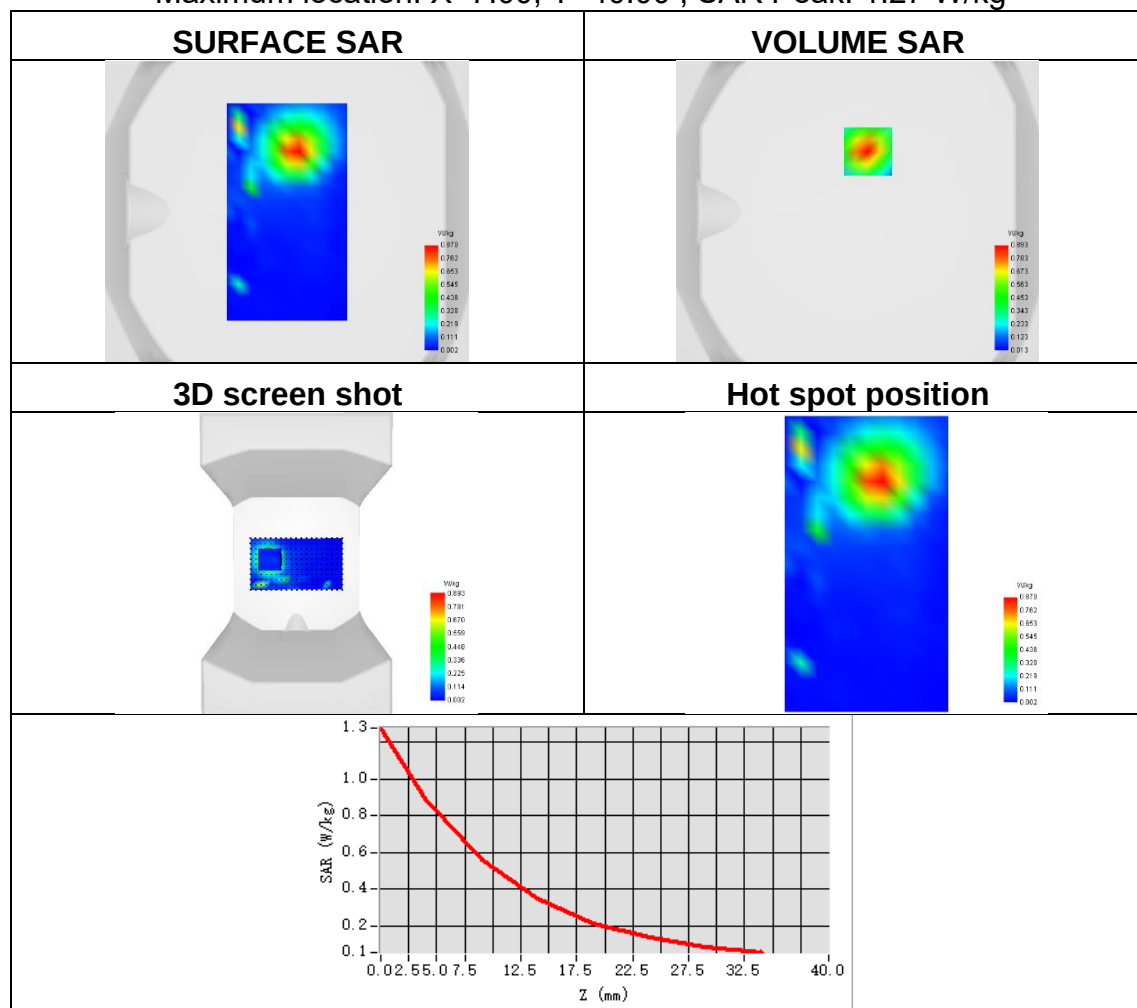




Plot 87:

Test Date	2025-09-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 41
Signal	NR TDD
Frequency	2680
SAR 10g (W/Kg)	0.213
SAR 1g (W/Kg)	0.403
ConvF	1.44
Relative permittivity	39.75
Conductivity (S/m)	1.98

Maximum location: X=-15.00, Y=-3.00 ; SAR Peak: 1.92 W/kg

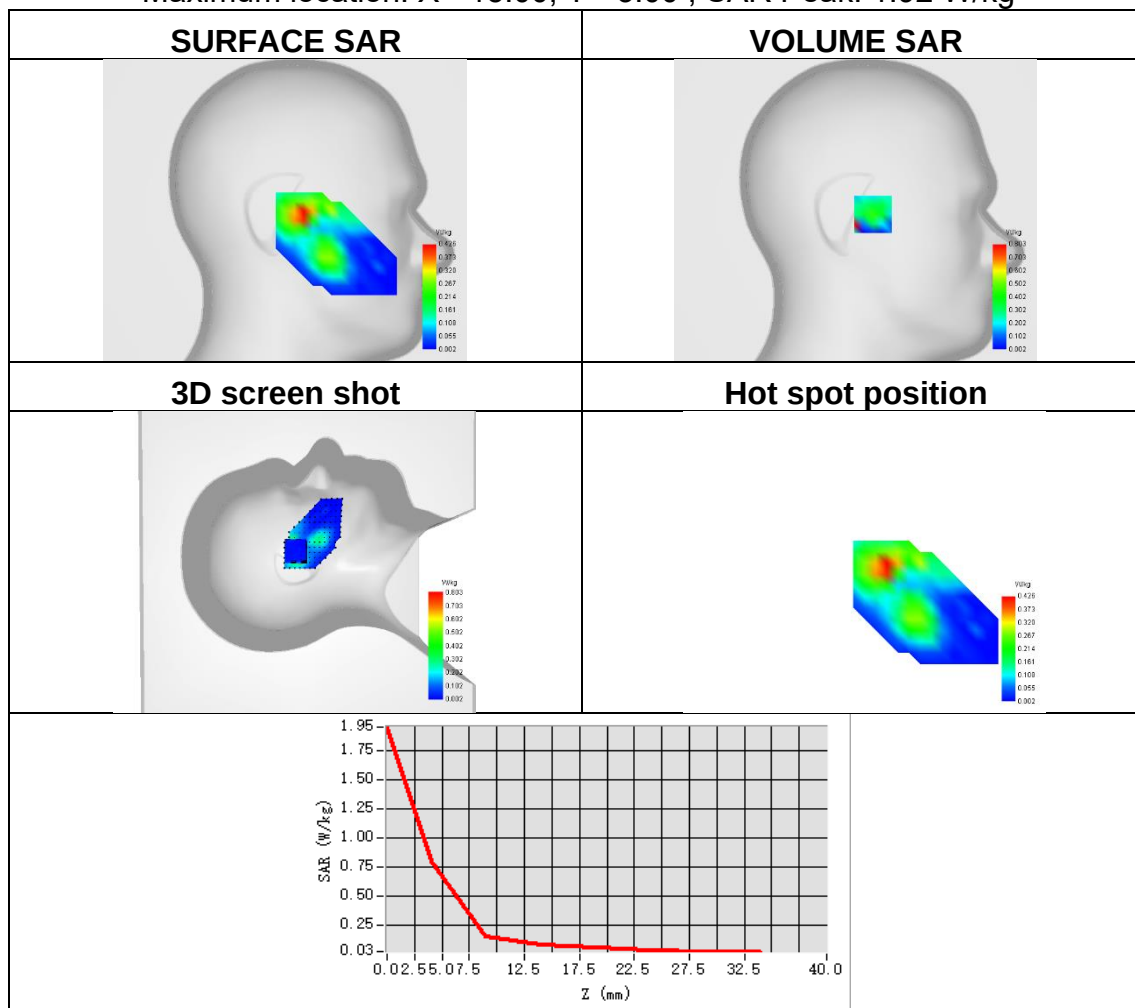




Plot 88:

Test Date	2025-09-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	NR band 41
Signal	NR TDD
Frequency	2680
SAR 10g (W/Kg)	0.365
SAR 1g (W/Kg)	0.743
ConvF	1.44
Relative permittivity	39.75
Conductivity (S/m)	1.98

Maximum location: X=10.00, Y=32.00 ; SAR Peak: 1.60 W/kg

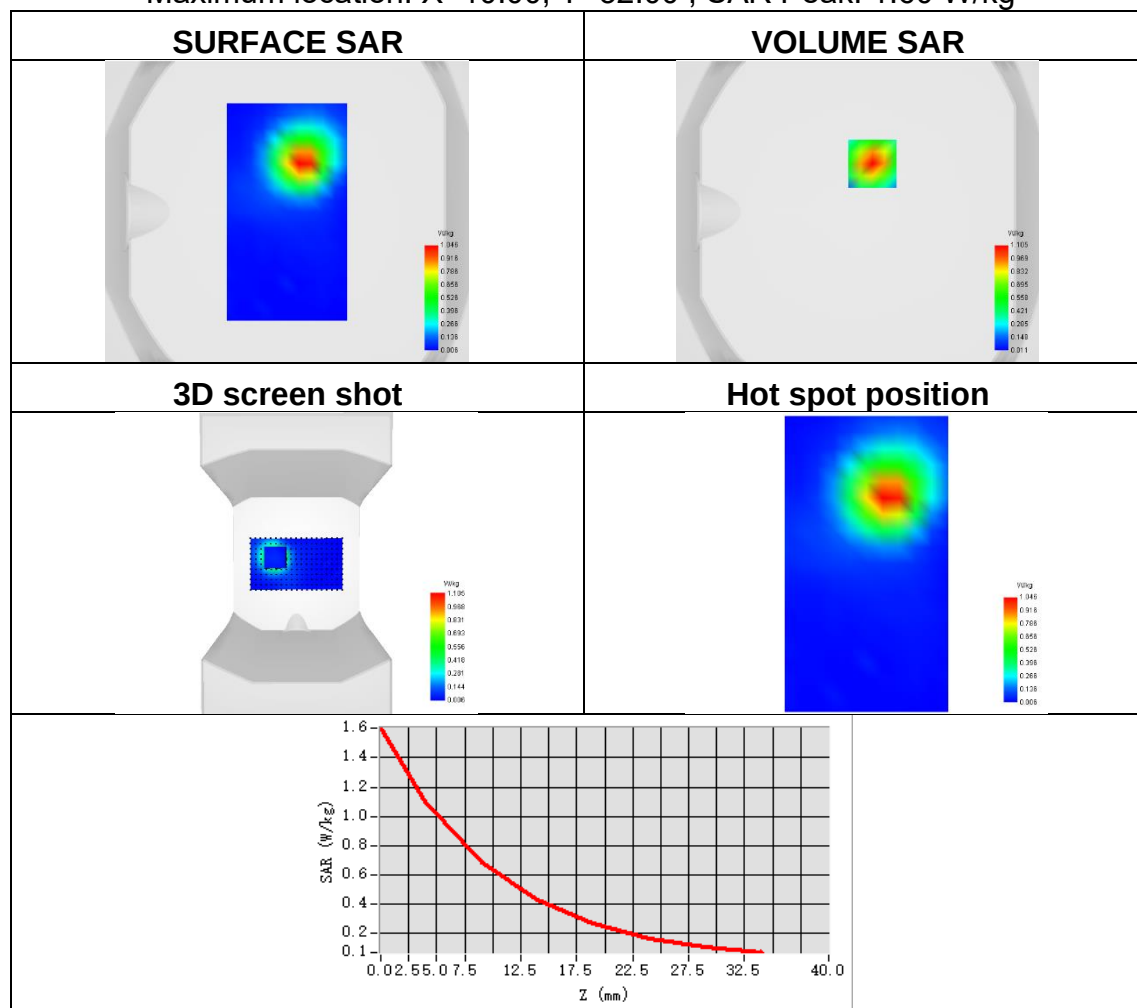




Plot 89:

Test Date	2025-09-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	NR band 77
Signal	NR FDD
Frequency	3500
SAR 10g (W/Kg)	0.016
SAR 1g (W/Kg)	0.037
ConvF	1.35
Relative permittivity	38.38
Conductivity (S/m)	2.85

Maximum location: X=-72.00, Y=-48.00 ; SAR Peak: 0.59 W/kg

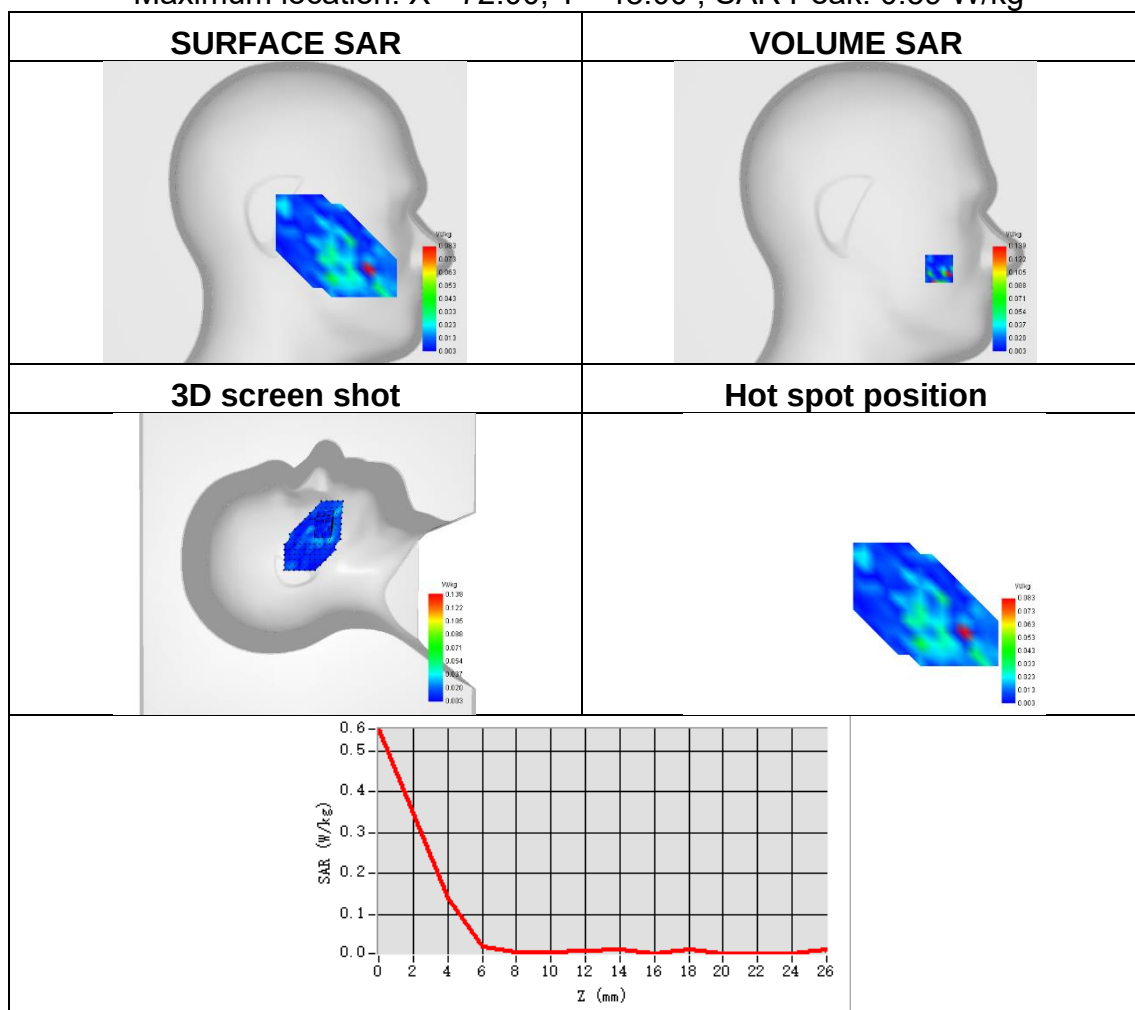




Plot 90:

Test Date	2025-09-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Left Side
Band	NR band 77
Signal	NR FDD
Frequency	3500
SAR 10g (W/Kg)	0.050
SAR 1g (W/Kg)	0.126
ConvF	1.35
Relative permittivity	38.38
Conductivity (S/m)	2.85

Maximum location: X=-1.00, Y=54.00 ; SAR Peak: 0.37 W/kg

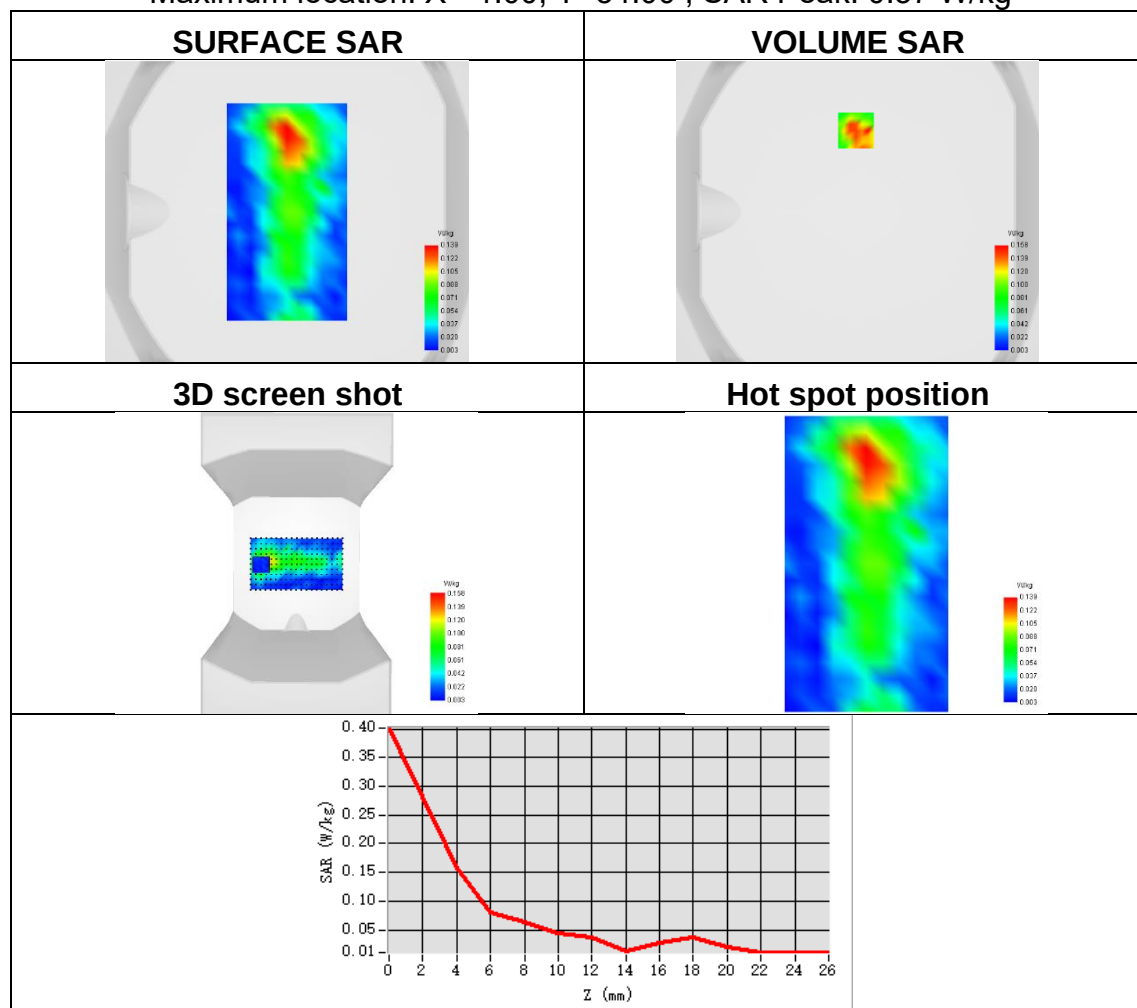




Plot 91:

Test Date	2025-09-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 78
Signal	NR TDD
Frequency	3500
SAR 10g (W/Kg)	0.074
SAR 1g (W/Kg)	0.168
ConvF	1.35
Relative permittivity	38.38
Conductivity (S/m)	2.85

Maximum location: X=-43.00, Y=-41.00 ; SAR Peak: 0.36 W/kg

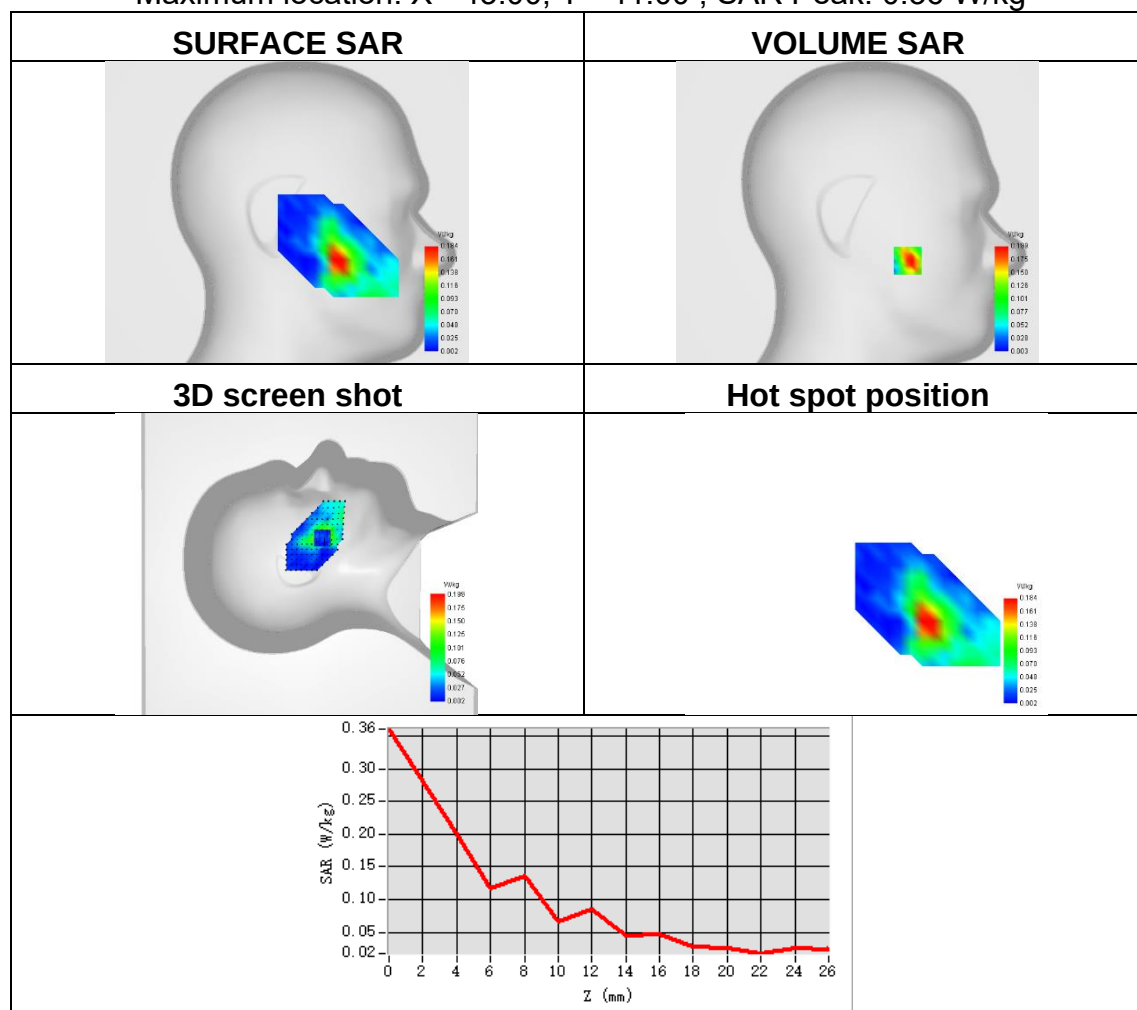




Plot 92:

Test Date	2025-09-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Left Side
Band	NR band 78
Signal	NR TDD
Frequency	3500
SAR 10g (W/Kg)	0.340
SAR 1g (W/Kg)	0.711
ConvF	1.35
Relative permittivity	38.38
Conductivity (S/m)	2.85

Maximum location: X=3.00, Y=40.00 ; SAR Peak: 1.38 W/kg

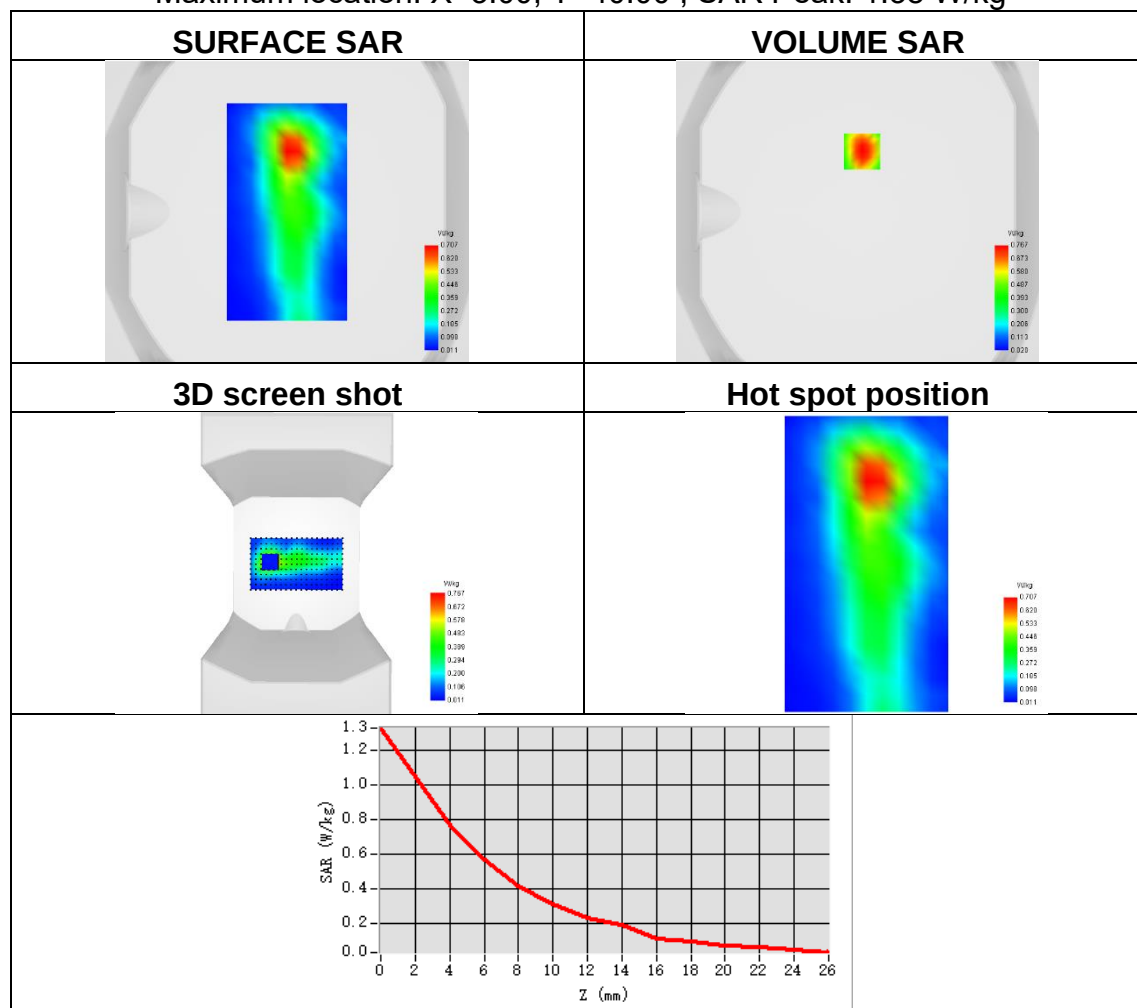



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※