

Test Result

Project Number: P-CC26090010

Test Time: 2026-09-28_20.39.51

EUT Name:	LTE MODEM	Temp.(°C):	23.2
Model Number:	CQS290	Humidity (%RH):	50
Sample Number:	CC26080320-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH1 P=3
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Liu Yabo	Remark:	实验室数据线



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.79	-4.87	74.0	23.21	Peak	187.04	150	Vertical	Pass
1**	2390.000	40.65	-4.87	54.0	13.35	AV	187.04	150	Vertical	Pass
2	2358.300	52.15	-5.06	74.0	21.85	Peak	262.00	150	Vertical	Pass
2**	2358.300	40.10	-5.06	54.0	13.90	AV	262.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090010

Test Time: 2026-09-28_20.37.32

EUT Name: LTE MODEM

Temp.(°C): 23.2

Model Number: CQS290

Humidity (%RH): 50

Sample Number: CC26080320-001-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C


Work Mode: 2.4G WIFI 11b CH1 P=3

Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 实验室数据线

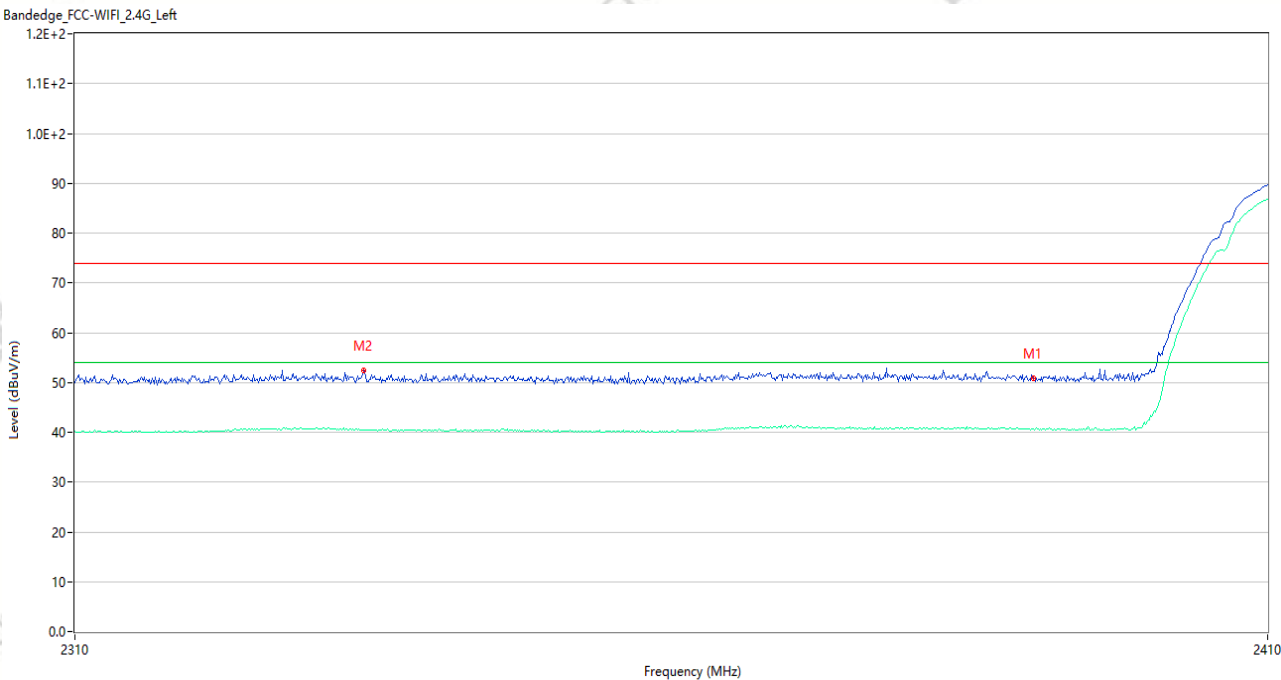


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.87	-4.87	74.0	23.13	Peak	182.22	150	Horizontal	Pass
1**	2390.000	40.60	-4.87	54.0	13.40	AV	182.22	150	Horizontal	Pass
2	2333.800	52.36	-4.18	74.0	21.64	Peak	119.00	150	Horizontal	Pass
2**	2333.800	40.42	-4.18	54.0	13.58	AV	119.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090010

Test Time: 2026-09-28_20.30.59

EUT Name:	LTE MODEM	Temp.(°C):	23.2
Model Number:	CQS290	Humidity (%RH):	50
Sample Number:	CC26080320-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH11 P=4
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Liu Yabo	Remark:	实验室数据线

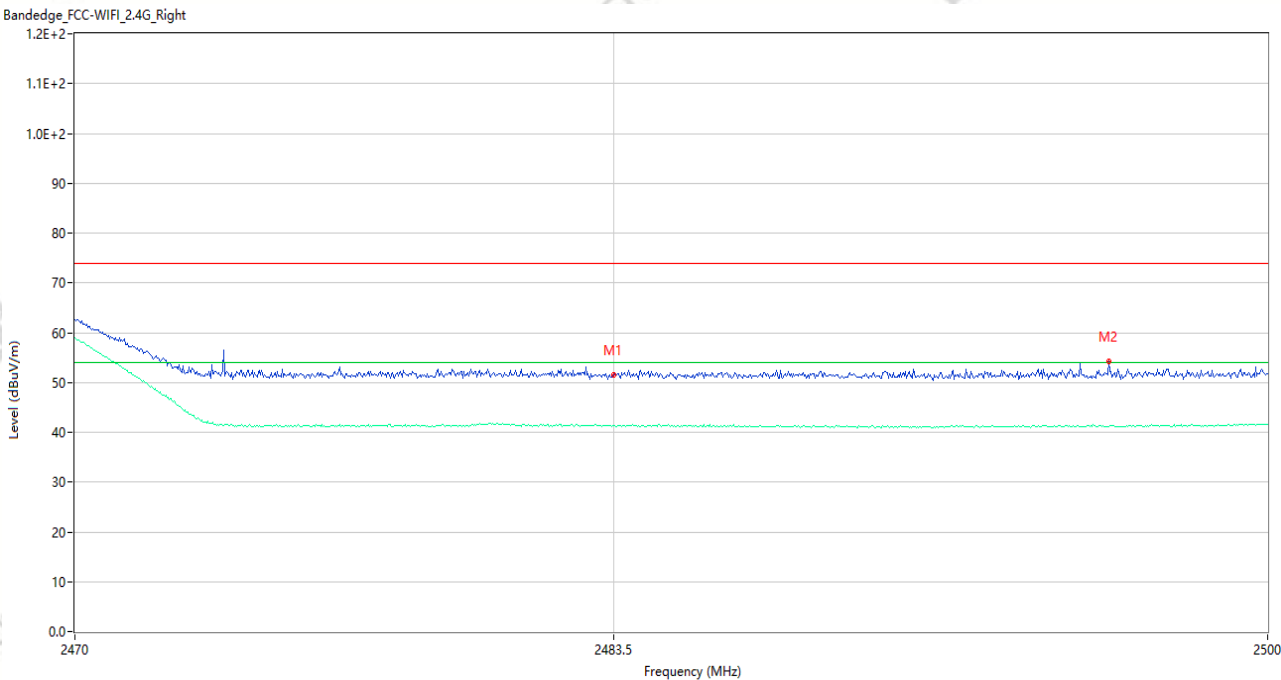


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.63	-3.78	74.0	22.37	Peak	0.00	150	Vertical	Pass
1**	2483.500	41.27	-3.78	54.0	12.73	AV	0.00	150	Vertical	Pass
2	2495.980	54.15	-3.94	74.0	19.85	Peak	207.00	150	Vertical	Pass
2**	2495.980	41.23	-3.94	54.0	12.77	AV	207.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090010
Test Time: 2026-09-28_20.32.53

EUT Name:	LTE MODEM	Temp.(°C):	23.2
Model Number:	CQS290	Humidity (%RH):	50
Sample Number:	CC26080320-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH11 P=4
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Liu Yabo	Remark:	实验室数据线

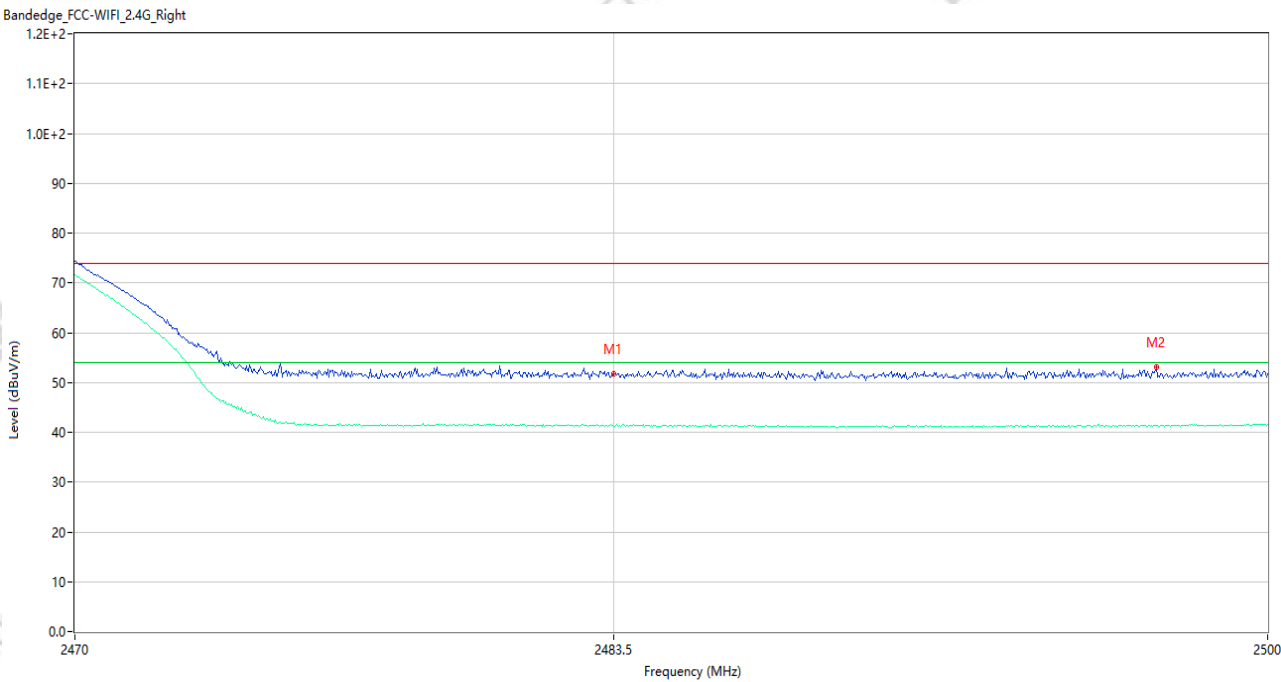


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.76	-3.78	74.0	22.24	Peak	340.00	150	Horizontal	Pass
1**	2483.500	41.21	-3.78	54.0	12.79	AV	340.00	150	Horizontal	Pass
2	2497.180	53.05	-3.96	74.0	20.95	Peak	4.00	150	Horizontal	Pass
2**	2497.180	41.27	-3.96	54.0	12.73	AV	4.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090010

Test Time: 2026-09-28_20.43.51

EUT Name:	LTE MODEM	Temp.(°C):	23.2
Model Number:	CQS290	Humidity (%RH):	50
Sample Number:	CC26080320-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11g CH1 P=8.5
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Liu Yabo	Remark:	实验室数据线

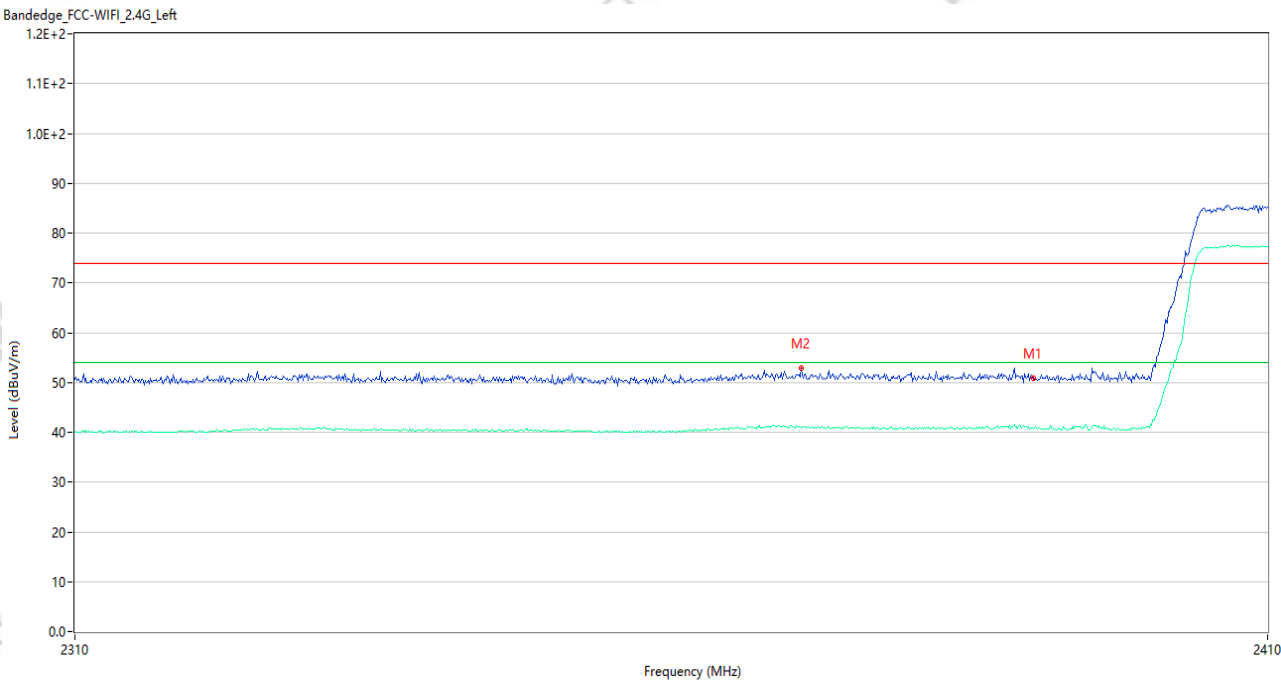

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.76	-4.87	74.0	23.24	Peak	62.92	150	Vertical	Pass
1**	2390.000	40.78	-4.87	54.0	13.22	AV	62.92	150	Vertical	Pass
2	2370.400	52.77	-4.02	74.0	21.23	Peak	230.00	150	Vertical	Pass
2**	2370.400	41.03	-4.02	54.0	12.97	AV	230.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090010

Test Time: 2026-09-28_20.46.19

EUT Name:	LTE MODEM	Temp.(°C):	23.2
Model Number:	CQS290	Humidity (%RH):	50
Sample Number:	CC26080320-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11g CH1 P=8.5
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Liu Yabo	Remark:	实验室数据线




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.71	-4.87	74.0	23.29	Peak	359.67	150	Horizontal	Pass
1**	2390.000	40.87	-4.87	54.0	13.13	AV	359.67	150	Horizontal	Pass
2	2374.000	53.07	-4.12	74.0	20.93	Peak	360.00	150	Horizontal	Pass
2**	2374.000	40.66	-4.12	54.0	13.34	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090010
Test Time: 2026-09-28_20.28.16

EUT Name:	LTE MODEM	Temp.(°C):	23.2
Model Number:	CQS290	Humidity (%RH):	50
Sample Number:	CC26080320-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11g CH11 P=10
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Liu Yabo	Remark:	实验室数据线

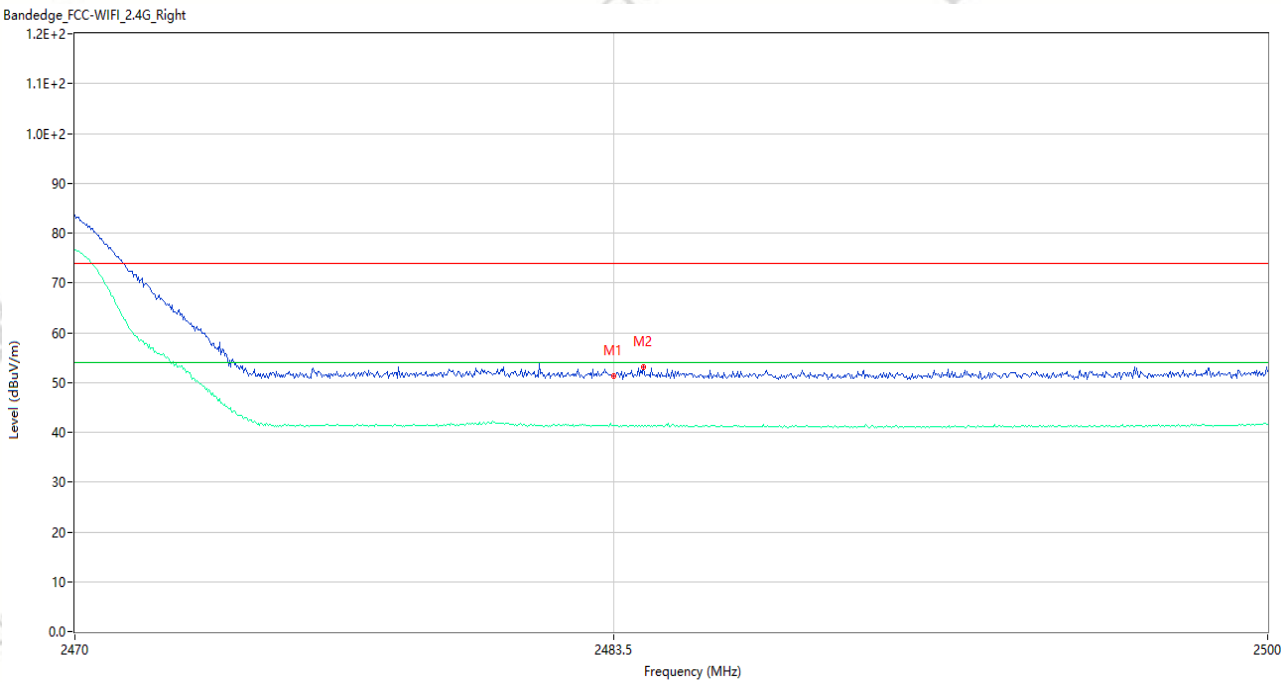


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.37	-3.78	74.0	22.63	Peak	41.00	150	Vertical	Pass
1**	2483.500	41.30	-3.78	54.0	12.70	AV	41.00	150	Vertical	Pass
2	2484.250	53.10	-3.78	74.0	20.90	Peak	180.00	150	Vertical	Pass
2**	2484.250	41.12	-3.78	54.0	12.88	AV	180.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090010

Test Time: 2026-09-28_20.25.51

EUT Name:	LTE MODEM	Temp.(°C):	23.2
Model Number:	CQS290	Humidity (%RH):	50
Sample Number:	CC26080320-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11g CH11 P=10
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Liu Yabo	Remark:	实验室数据线

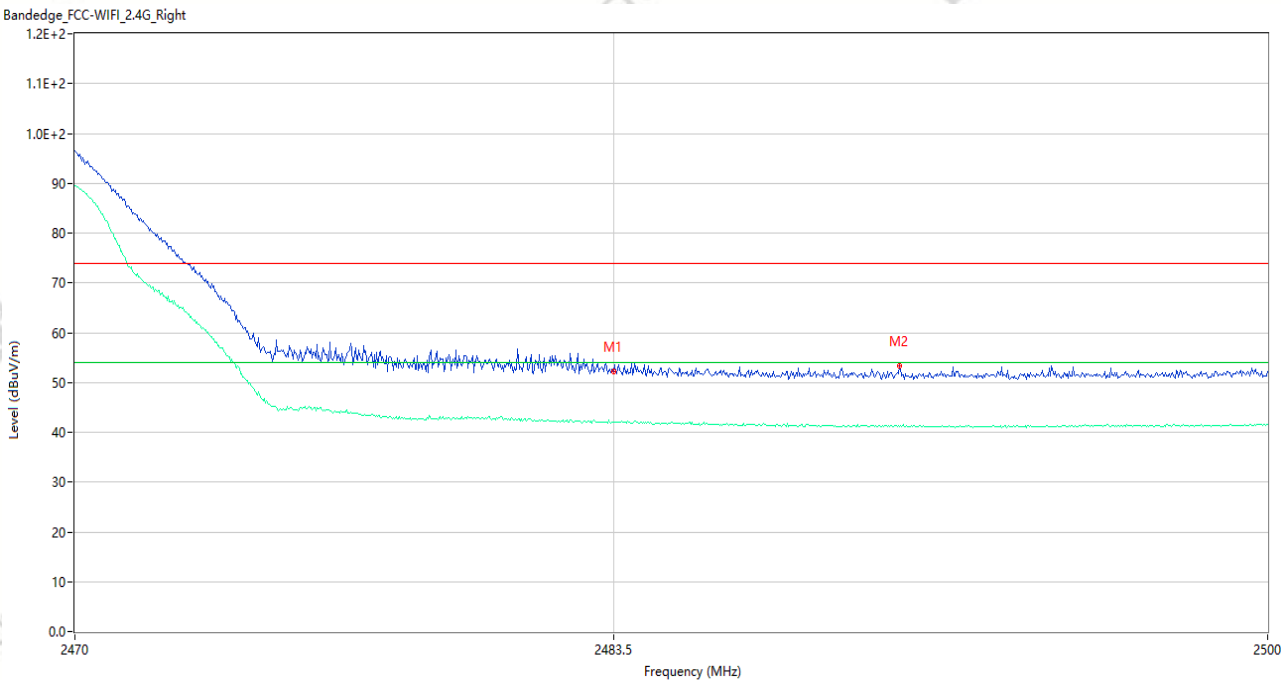

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.23	-3.78	74.0	21.77	Peak	245.00	150	Horizontal	Pass
1**	2483.500	41.95	-3.78	54.0	12.05	AV	245.00	150	Horizontal	Pass
2	2490.700	53.22	-3.84	74.0	20.78	Peak	125.00	150	Horizontal	Pass
2**	2490.700	41.21	-3.84	54.0	12.79	AV	125.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090010

Test Time: 2026-09-28_20.54.26

EUT Name:	LTE MODEM	Temp.(°C):	23.2
Model Number:	CQS290	Humidity (%RH):	50
Sample Number:	CC26080320-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH1 P=8.5
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Liu Yabo	Remark:	实验室数据线




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.06	-4.87	74.0	22.94	Peak	270.84	150	Vertical	Pass
1**	2390.000	40.46	-4.87	54.0	13.54	AV	270.84	150	Vertical	Pass
2	2381.900	53.00	-4.40	74.0	21.00	Peak	151.00	150	Vertical	Pass
2**	2381.900	40.73	-4.40	54.0	13.27	AV	151.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090010

Test Time: 2026-09-28_20.50.10

EUT Name:	LTE MODEM	Temp.(°C):	23.2
Model Number:	CQS290	Humidity (%RH):	50
Sample Number:	CC26080320-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH1 P=8.5
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Liu Yabo	Remark:	实验室数据线

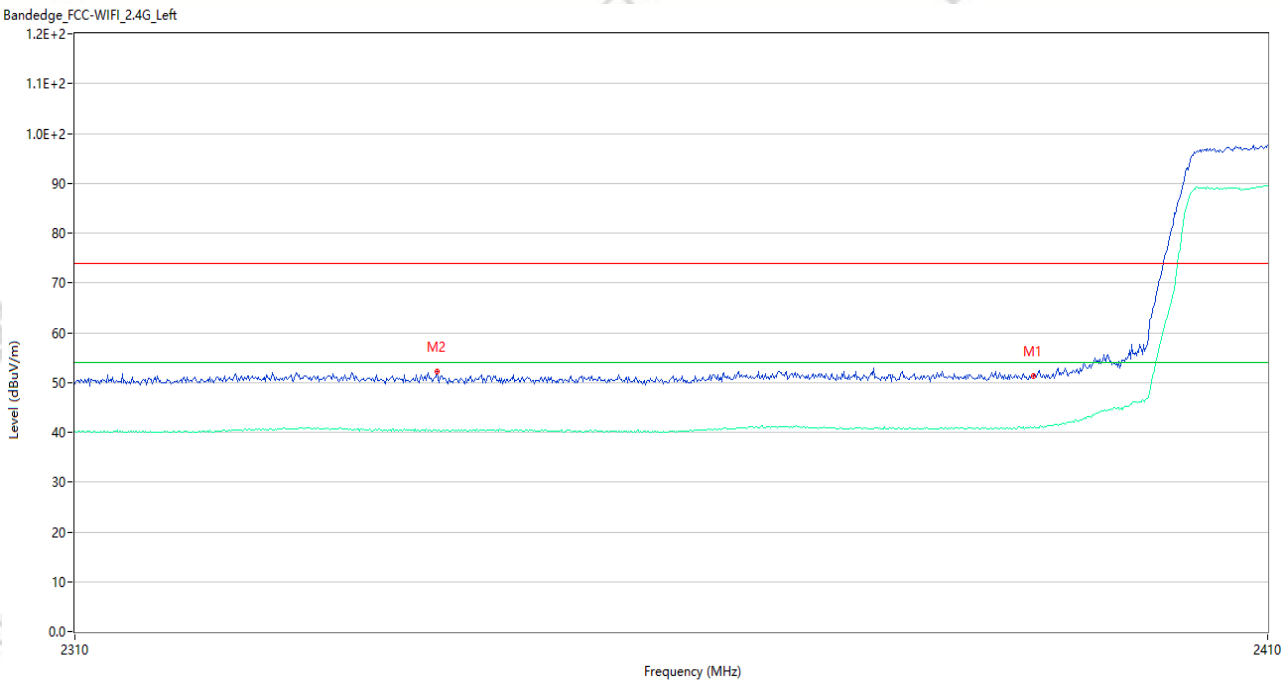


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.34	-4.87	74.0	22.66	Peak	307.02	150	Horizontal	Pass
1**	2390.000	40.83	-4.87	54.0	13.17	AV	307.02	150	Horizontal	Pass
2	2339.900	52.12	-4.34	74.0	21.88	Peak	199.00	150	Horizontal	Pass
2**	2339.900	40.30	-4.34	54.0	13.70	AV	199.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090010

Test Time: 2026-09-28_20.18.30

EUT Name:	LTE MODEM	Temp.(°C):	23.2
Model Number:	CQS290	Humidity (%RH):	50
Sample Number:	CC26080320-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH11 P=11
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Liu Yabo	Remark:	实验室数据线

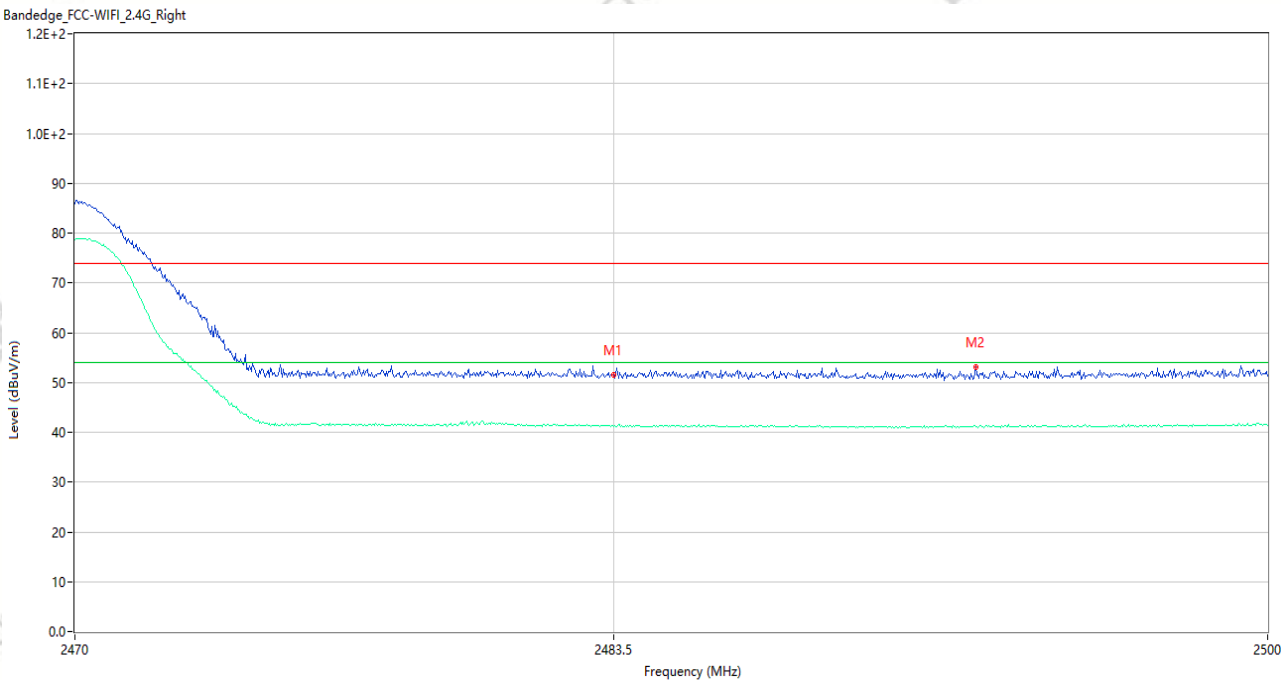


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.48	-3.78	74.0	22.52	Peak	338.00	150	Vertical	Pass
1**	2483.500	41.22	-3.78	54.0	12.78	AV	338.00	150	Vertical	Pass
2	2492.620	53.04	-3.88	74.0	20.96	Peak	246.00	150	Vertical	Pass
2**	2492.620	41.05	-3.88	54.0	12.95	AV	246.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090010

Test Time: 2026-09-28_20.21.59

EUT Name:	LTE MODEM	Temp.(°C):	23.2
Model Number:	CQS290	Humidity (%RH):	50
Sample Number:	CC26080320-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH11 P=11
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Liu Yabo	Remark:	实验室数据线

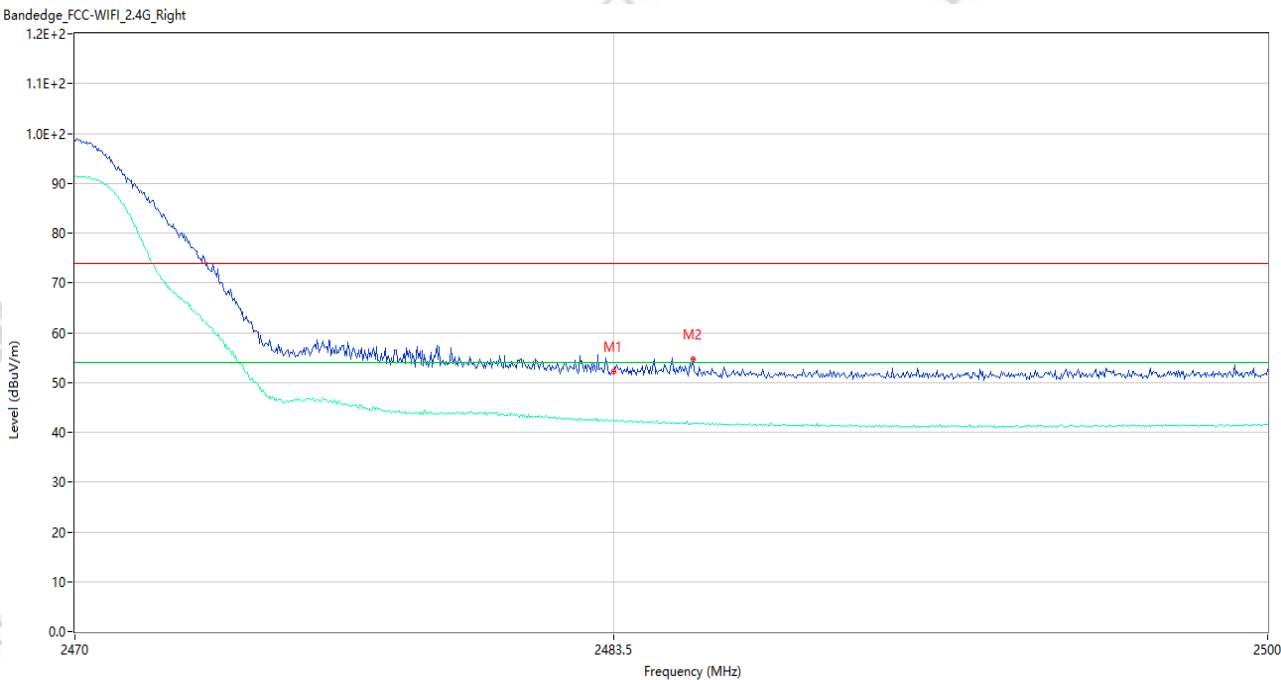


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.26	-3.78	74.0	21.74	Peak	137.00	150	Horizontal	Pass
1**	2483.500	42.34	-3.78	54.0	11.66	AV	137.00	150	Horizontal	Pass
2	2485.510	54.61	-3.78	74.0	19.39	Peak	190.00	150	Horizontal	Pass
2**	2485.510	41.89	-3.78	54.0	12.11	AV	190.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090010

Test Time: 2026-09-28_20.58.35

EUT Name:	LTE MODEM	Temp.(°C):	23.2
Model Number:	CQS290	Humidity (%RH):	50
Sample Number:	CC26080320-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n40 CH3 P=10
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Liu Yabo	Remark:	实验室数据线

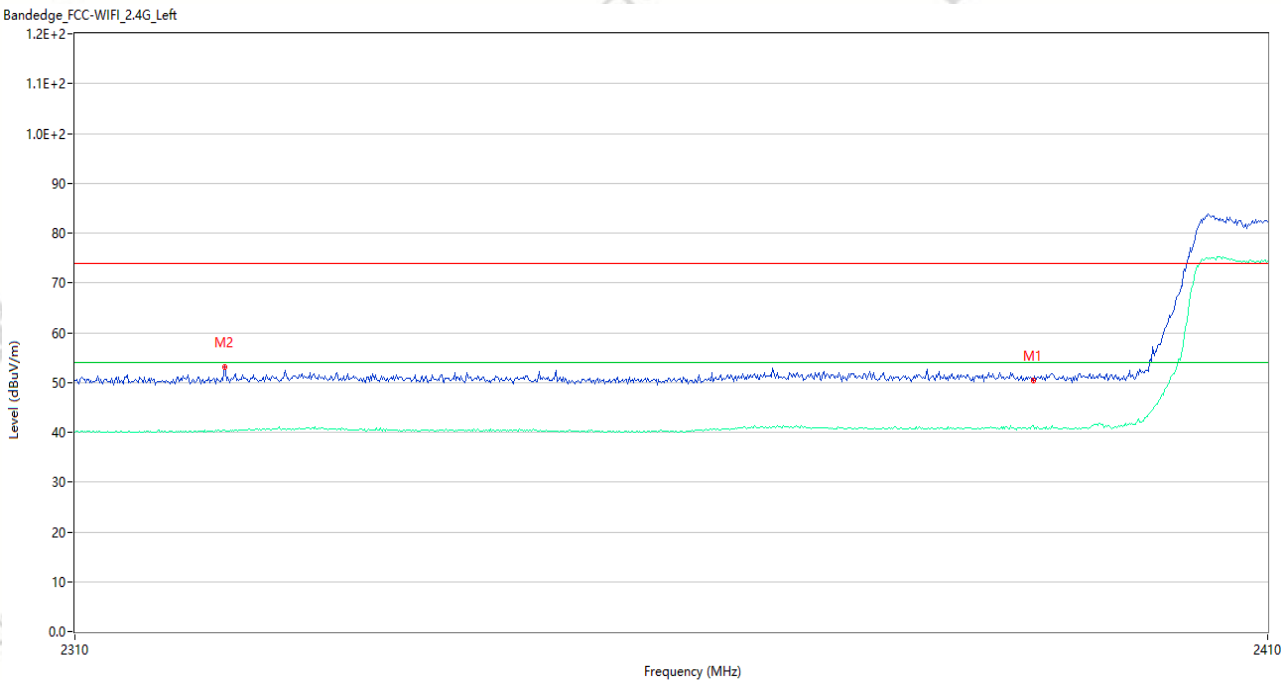


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.35	-4.87	74.0	23.65	Peak	12.29	150	Vertical	Pass
1**	2390.000	41.43	-4.87	54.0	12.57	AV	12.29	150	Vertical	Pass
2	2322.300	53.00	-4.87	74.0	21.00	Peak	243.00	150	Vertical	Pass
2**	2322.300	40.53	-4.87	54.0	13.47	AV	243.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090010

Test Time: 2026-09-28_21.01.47

EUT Name:	LTE MODEM	Temp.(°C):	23.2
Model Number:	CQS290	Humidity (%RH):	50
Sample Number:	CC26080320-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n40 CH3 P=10
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Liu Yabo	Remark:	实验室数据线

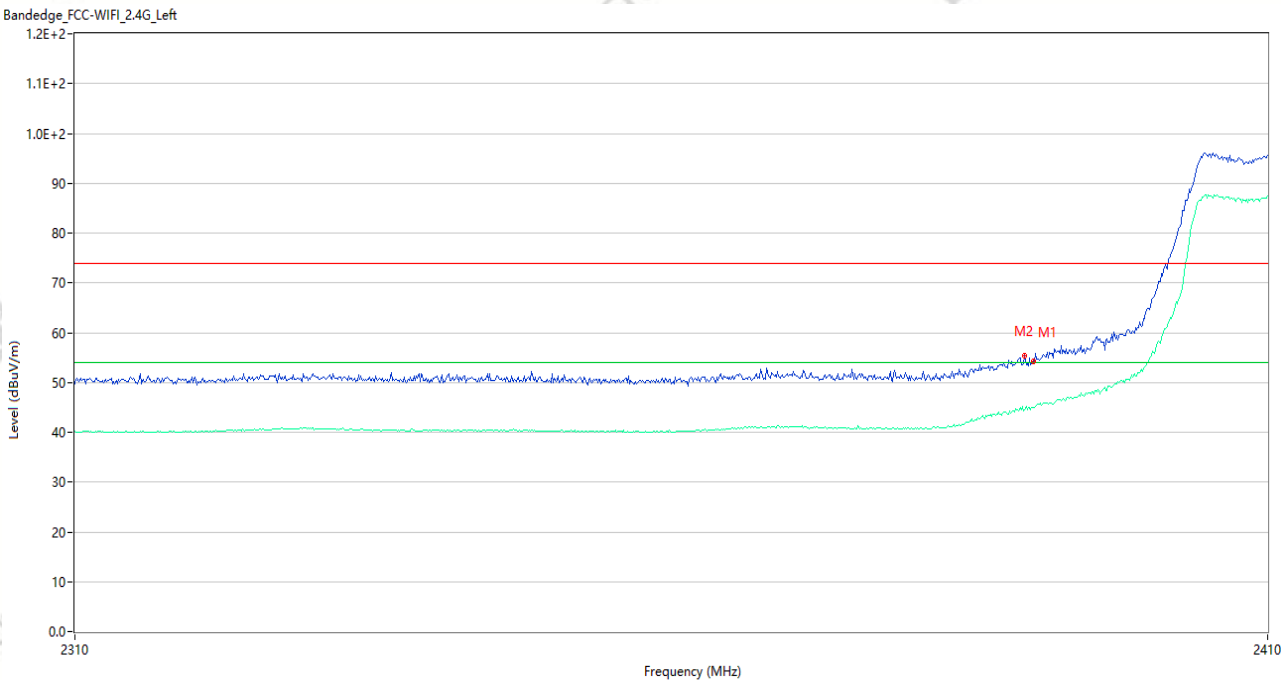


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	54.31	-4.87	74.0	19.69	Peak	241.15	150	Horizontal	Pass
1**	2390.000	44.91	-4.87	54.0	9.09	AV	241.15	150	Horizontal	Pass
2	2389.300	55.31	-4.84	74.0	18.69	Peak	187.00	150	Horizontal	Pass
2**	2389.300	44.43	-4.84	54.0	9.57	AV	187.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090010
Test Time: 2026-09-28_20.14.56

EUT Name:	LTE MODEM	Temp.(°C):	23.2
Model Number:	CQS290	Humidity (%RH):	50
Sample Number:	CC26080320-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n40 CH9 P=0
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Liu Yabo	Remark:	实验室数据线

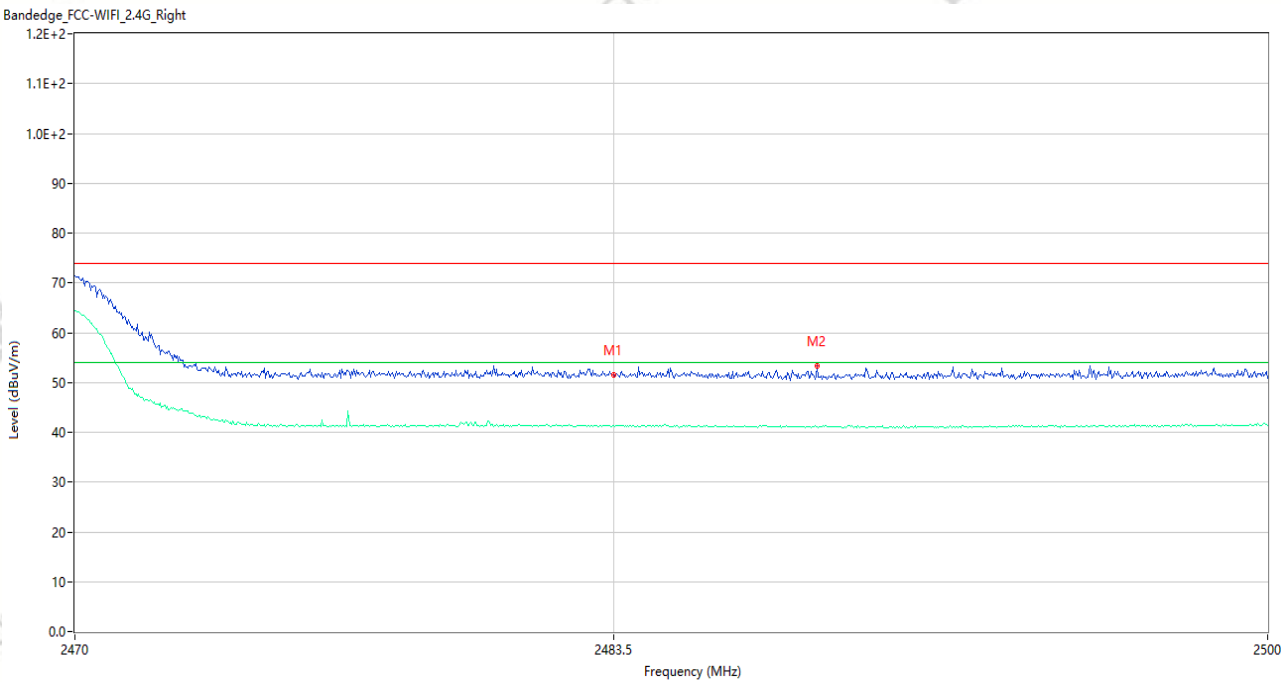


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.59	-3.78	74.0	22.41	Peak	78.00	150	Vertical	Pass
1**	2483.500	41.33	-3.78	54.0	12.67	AV	78.00	150	Vertical	Pass
2	2488.630	53.34	-3.82	74.0	20.66	Peak	360.00	150	Vertical	Pass
2**	2488.630	41.15	-3.82	54.0	12.85	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090010

Test Time: 2026-09-28_20.11.47

EUT Name:	LTE MODEM	Temp.(°C):	23.2
Model Number:	CQS290	Humidity (%RH):	50
Sample Number:	CC26080320-001-S03	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n40 CH9 P=0
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Liu Yabo	Remark:	实验室数据线

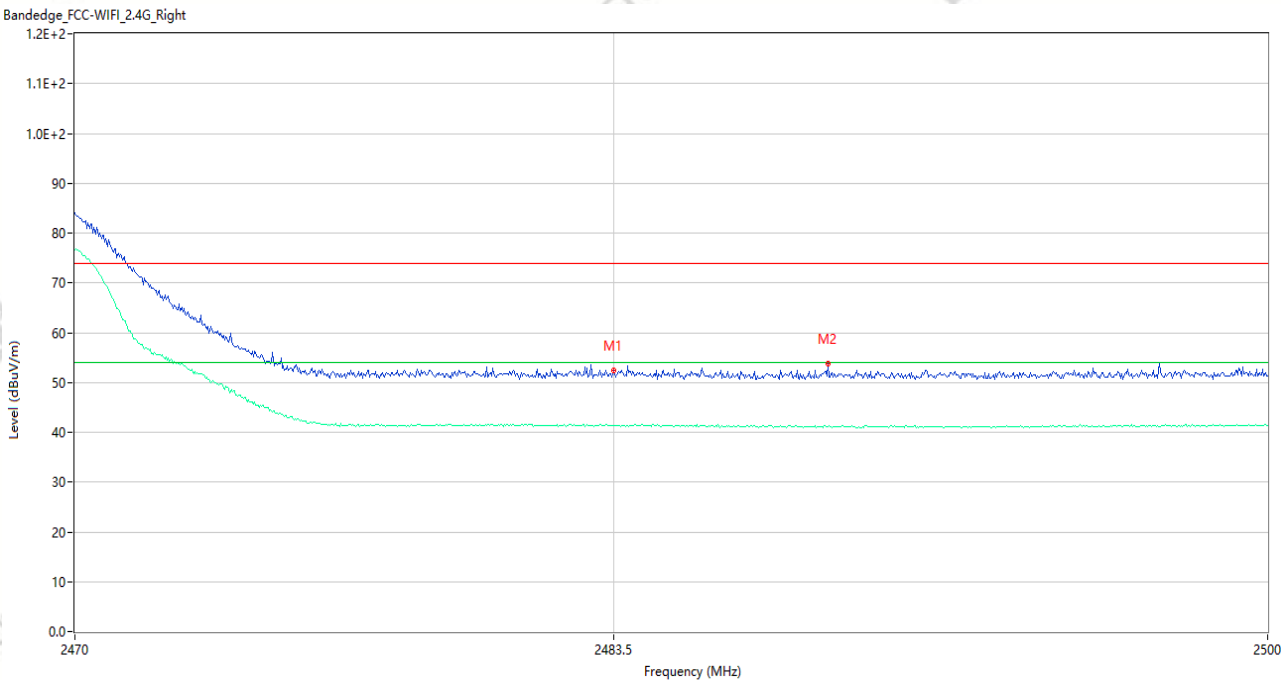

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.32	-3.78	74.0	21.68	Peak	329.00	150	Horizontal	Pass
1**	2483.500	41.25	-3.78	54.0	12.75	AV	329.00	150	Horizontal	Pass
2	2488.900	53.88	-3.82	74.0	20.12	Peak	246.00	150	Horizontal	Pass
2**	2488.900	41.07	-3.82	54.0	12.93	AV	246.00	150	Horizontal	Pass