

Appendix A: Test Results of 915MHz Band SRD


APPENDIX A: TEST RESULTS OF 915MHZ BAND SRD	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
Test Result	2
Test Graphs	3
APPENDIX A.2: TEST RESULTS OF 99% BANDWIDTH	5
Test Result	5
Test Graphs	6
APPENDIX A.3: TEST RESULTS OF CARRIER FREQUENCY SEPARATION	8
Test Result	8
Test Graphs	9
APPENDIX A.4: TEST RESULTS OF TIME OF OCCUPANCY	11
Test Result	11
Test Graphs	12
APPENDIX A.5: TEST RESULTS OF NUMBER OF HOPPING FREQUENCY	13
Test Result	13
Test Graphs	14
APPENDIX A.6: TEST RESULTS OF BAND EDGE MEASUREMENTS	15
Fixed mode	15
Hopping mode	16
APPENDIX A.7: TEST RESULTS OF CONDUCTED SPURIOUS EMISSION	17
Fixed mode	17
Hopping mode	20
APPENDIX A.8: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	21
30 MHz - 1GHz	21
Above 1GHz	27

Appendix A.1: Test Results of 20dB Bandwidth


Test Result

Test Mode	Channel Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Result
915MHz band SRD	903.6	11.07	<500	Pass
	912.6	11.07		
	922	11.07		


Test Graphs

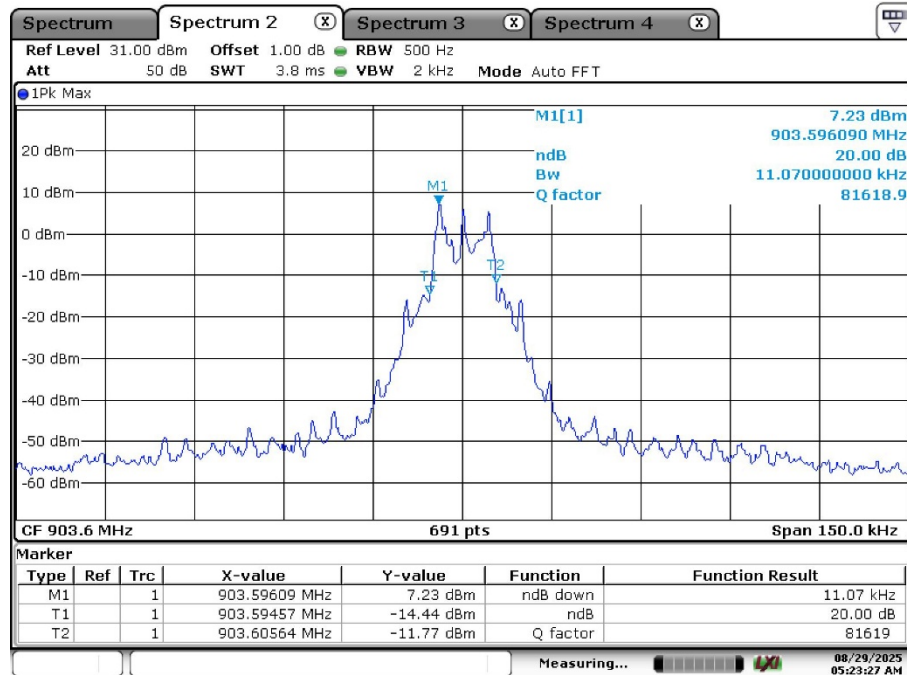

Date: 29.AUG.2025 05:23:27

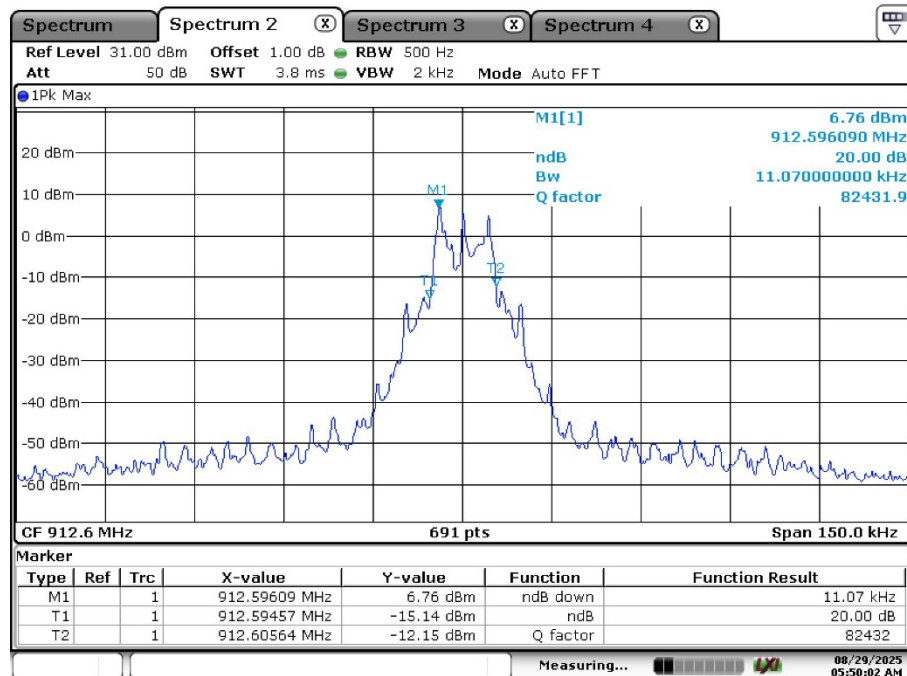

Date: 29.AUG.2025 05:50:02

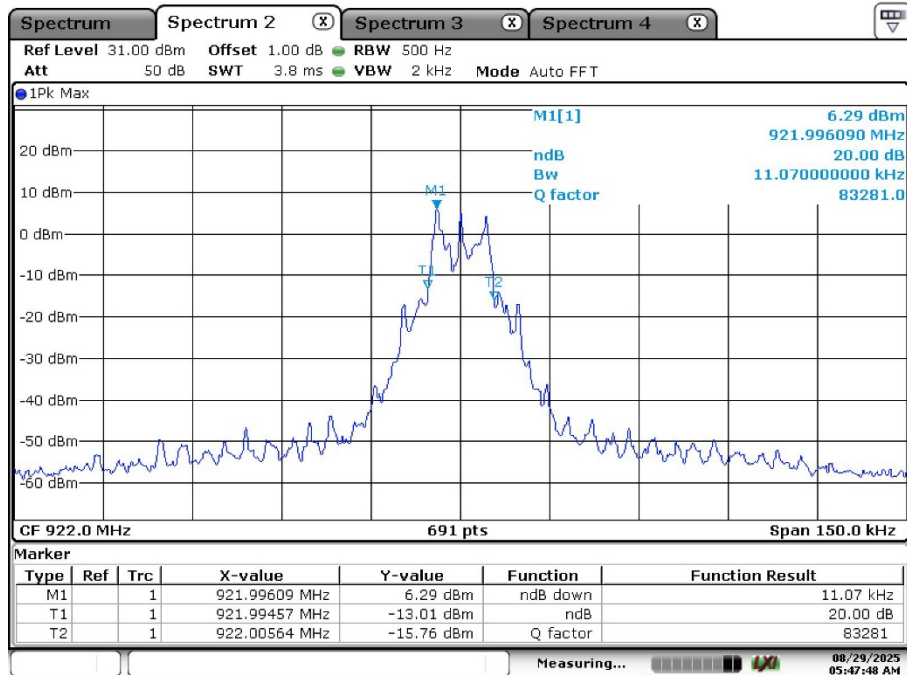


Date: 29.AUG.2025 05:47:48

Appendix A.2: Test Results of 99% Bandwidth


Test Result

Test Mode	Channel Frequency (MHz)	99% Bandwidth (kHz)	Limit (MHz)	Result
915MHz band SRD	903.6	12.81	/	Pass
	912.6	12.59		
	922	12.59		


Test Graphs

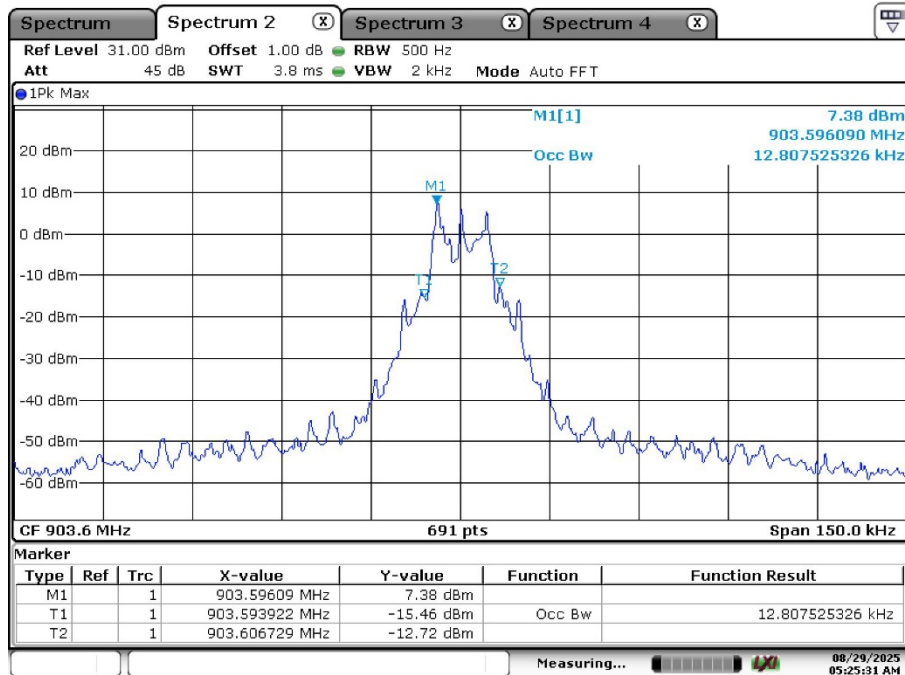

Date: 29.AUG.2025 05:25:31

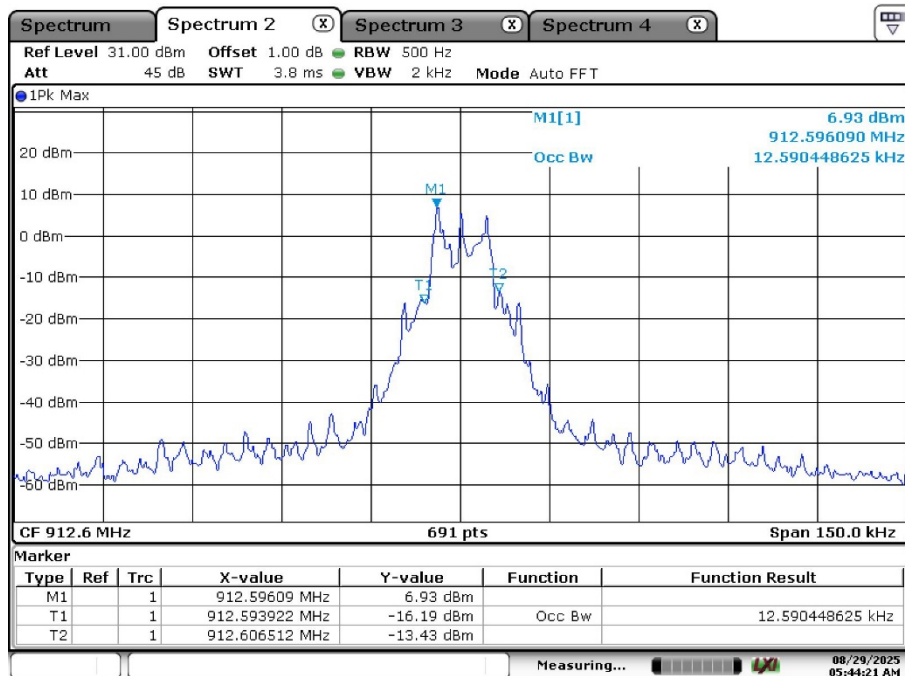

Date: 29.AUG.2025 05:44:21

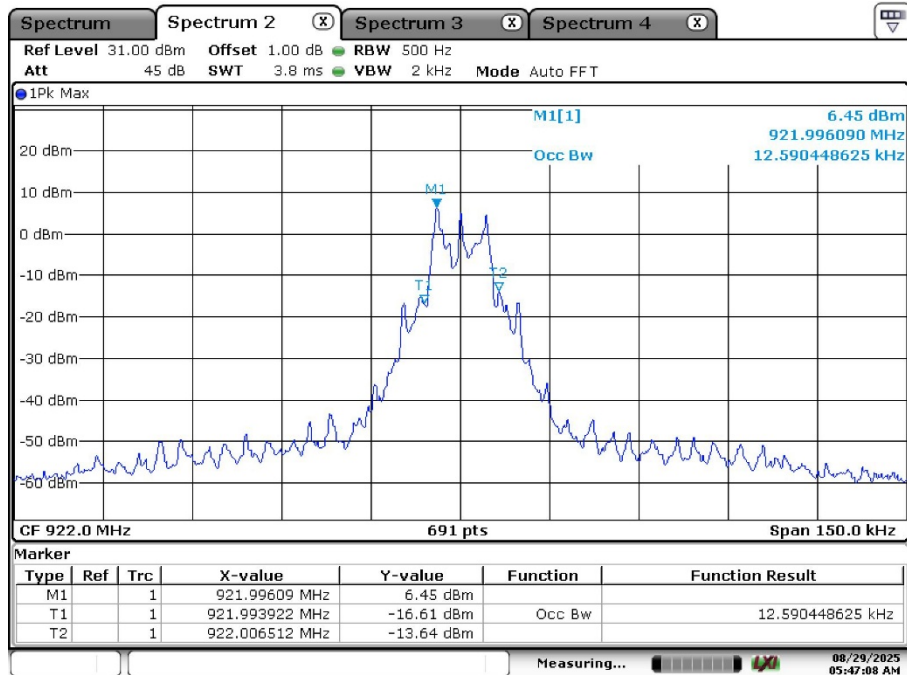

Date: 29.AUG.2025 05:47:08


Appendix A.3: Test Results of Carrier Frequency Separation

Test Result


Test Mode	Channel	Measured Channel Separation (kHz)	Limit (kHz)	Result
915MHz band SRD	Low Channel	200.50	≥ 20dB bandwidth	Pass
	Adjacency Channel			
	Middle Channel	201.20		Pass
	Adjacency Channel			
	High Channel	200.00		Pass
	Adjacency Channel			

Note: The limit is minimum 20 dB bandwidth: 11.07kHz.


Test Graphs

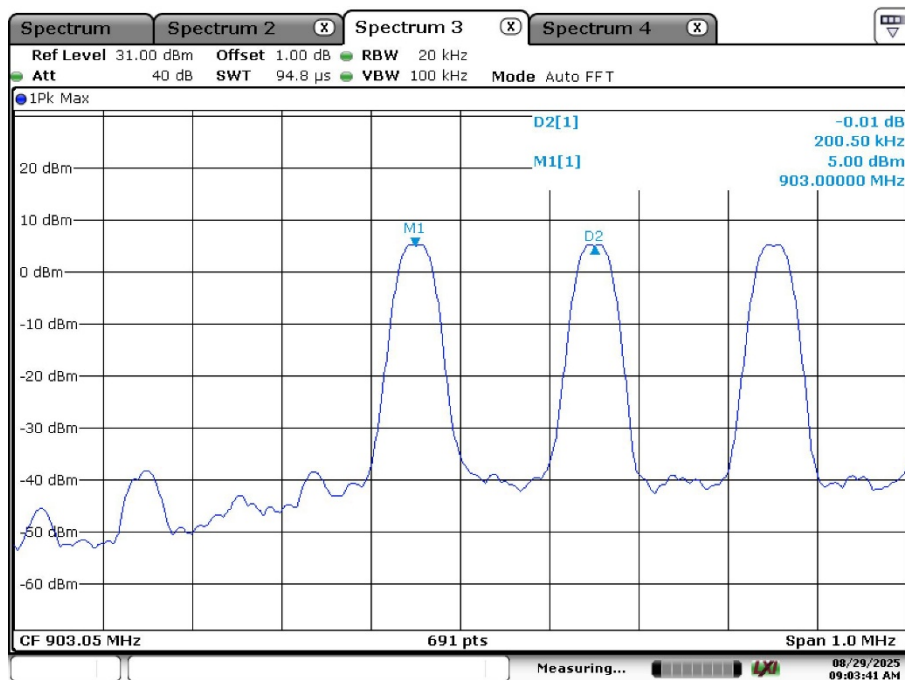

Date: 29.AUG.2025 09:03:41

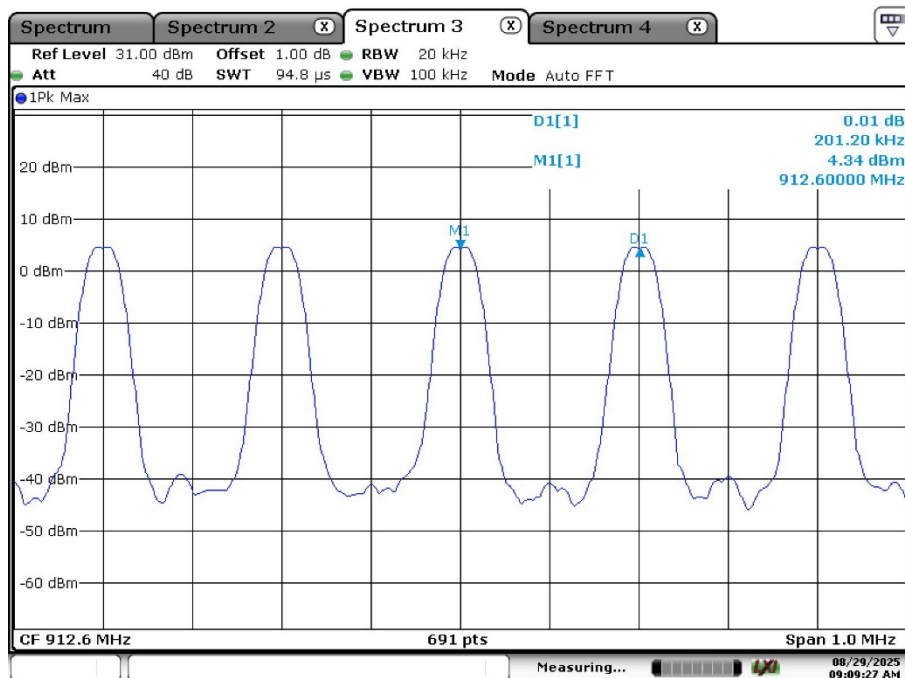

Date: 29.AUG.2025 09:09:27

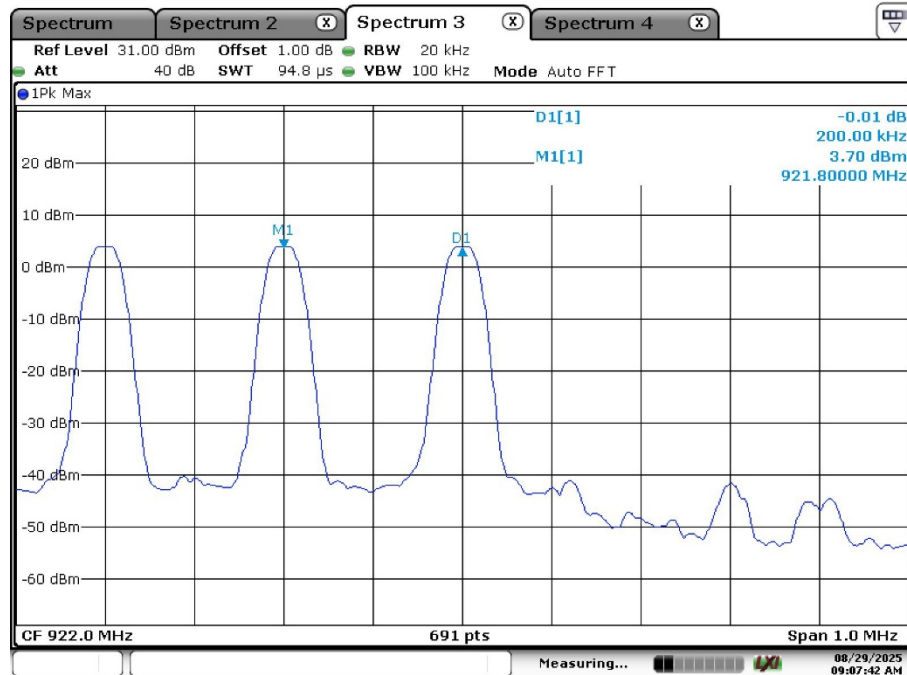


Date: 29.AUG.2025 09:07:42

Appendix A.4: Test Results of Time of Occupancy

Test Result

Test Mode	Period (s)	Channel Occupancy Time (ms)	Limit (ms)	Result
915MHz band SRD	20	347.8	400	Pass

Test Graphs

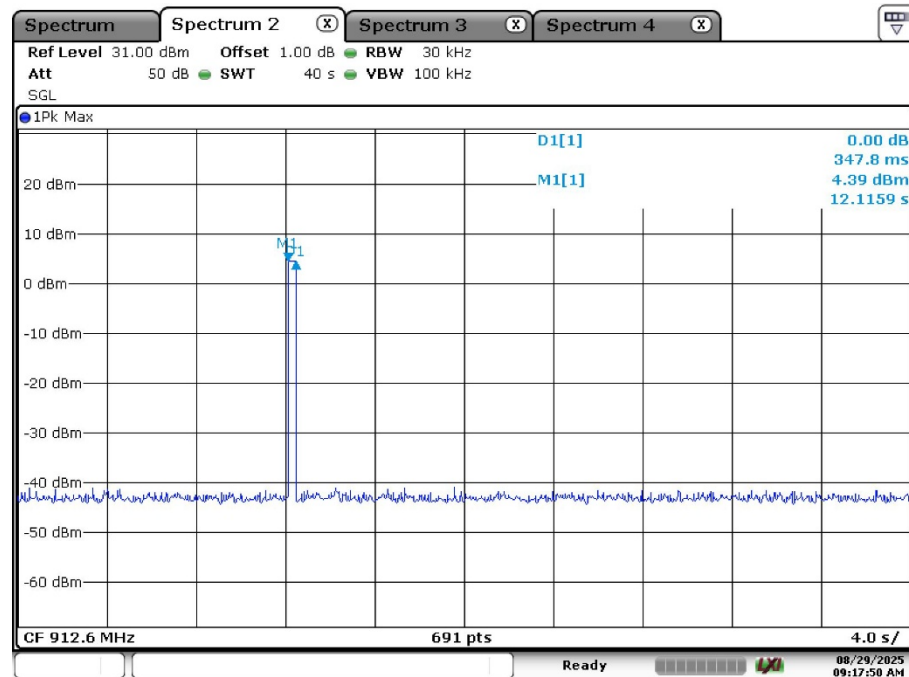


Date: 29.AUG.2025 09:17:51

Appendix A.5: Test Results of Number of Hopping Frequency


Test Result

Test Mode	Hopping Frequencies	Limit	Result
915MHz band SRD	96	>50	Pass

Test Graphs

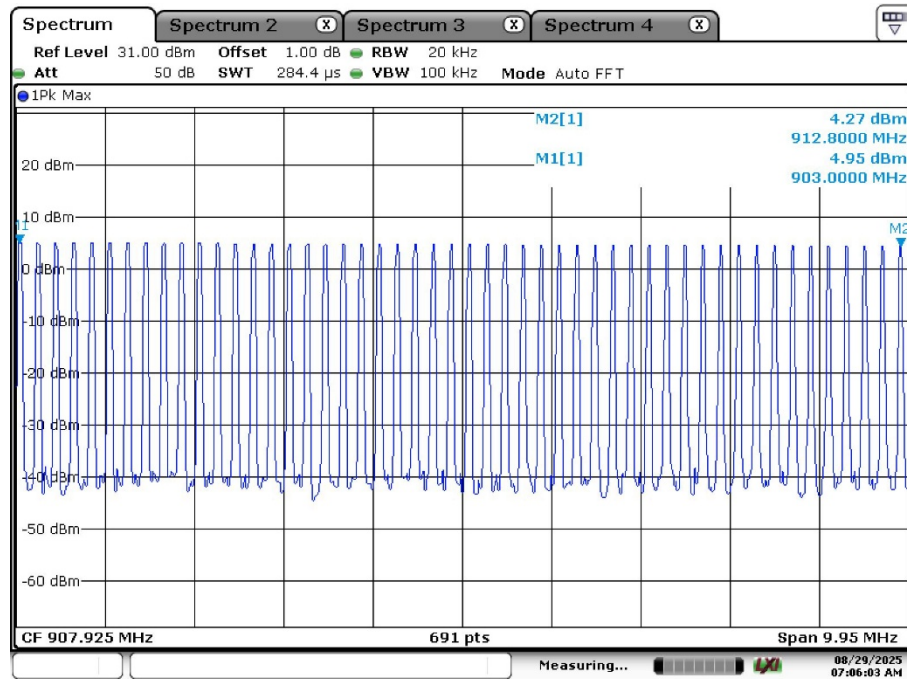

Date: 29.AUG.2025 07:06:03

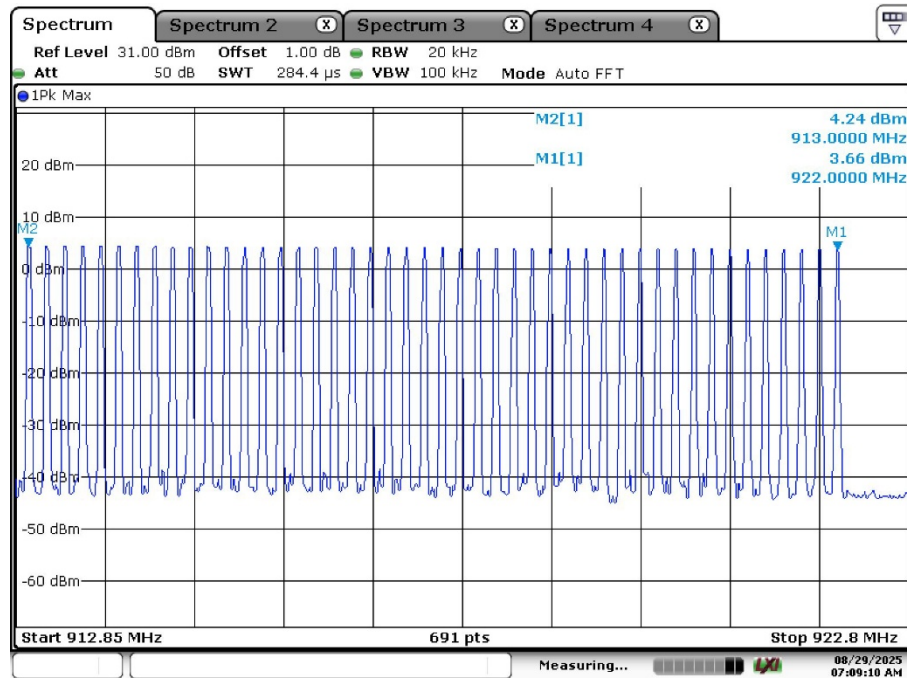


Date: 29.AUG.2025 07:09:11


Appendix A.6: Test Results of Band Edge Measurements

Fixed mode

Low Channel

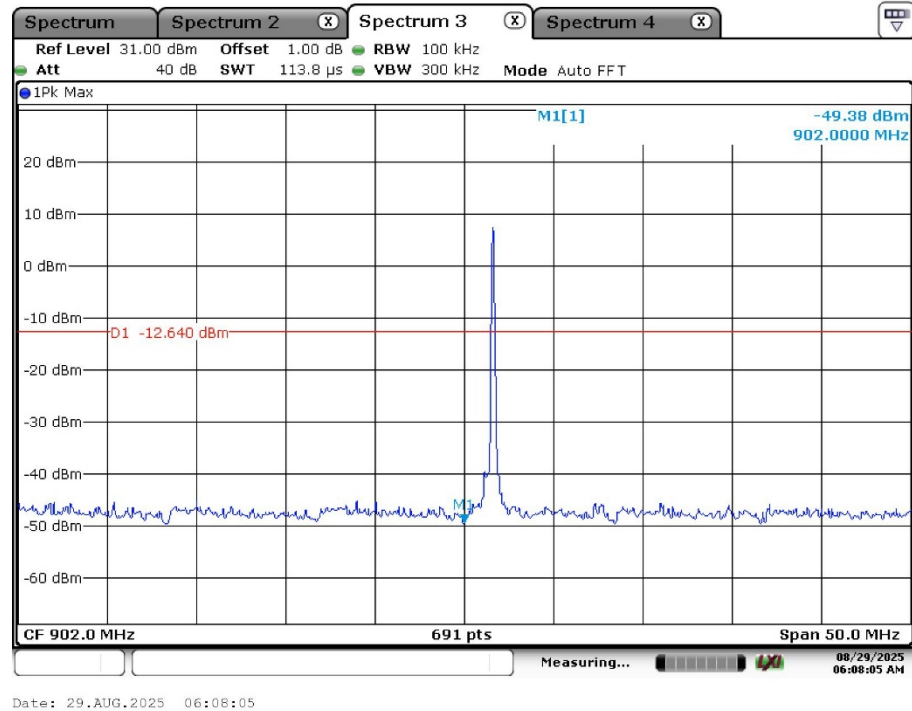


High Channel

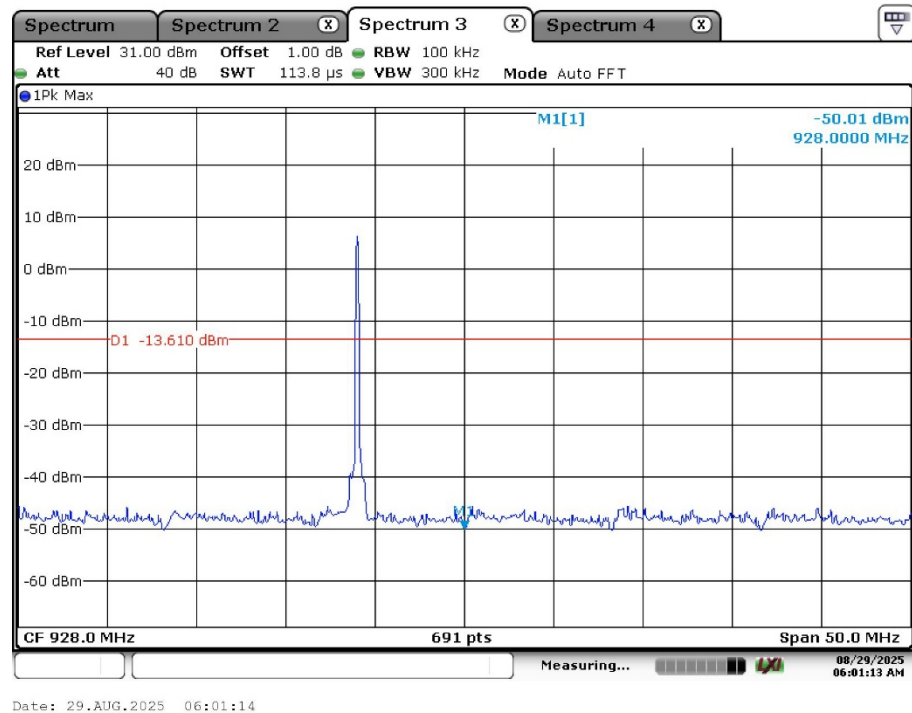


Hopping mode

Low Channel

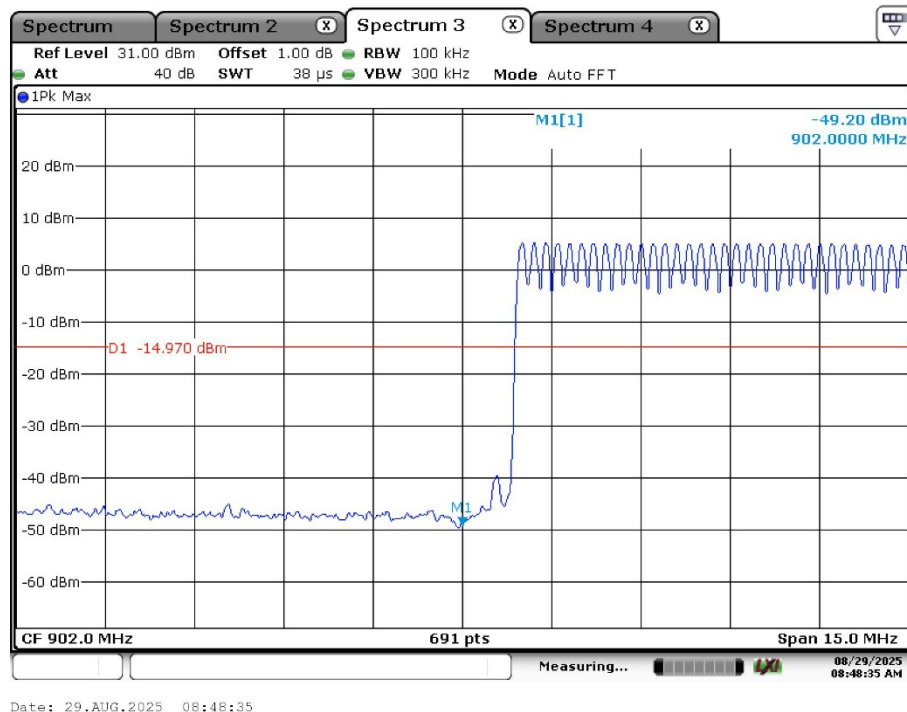



High Channel

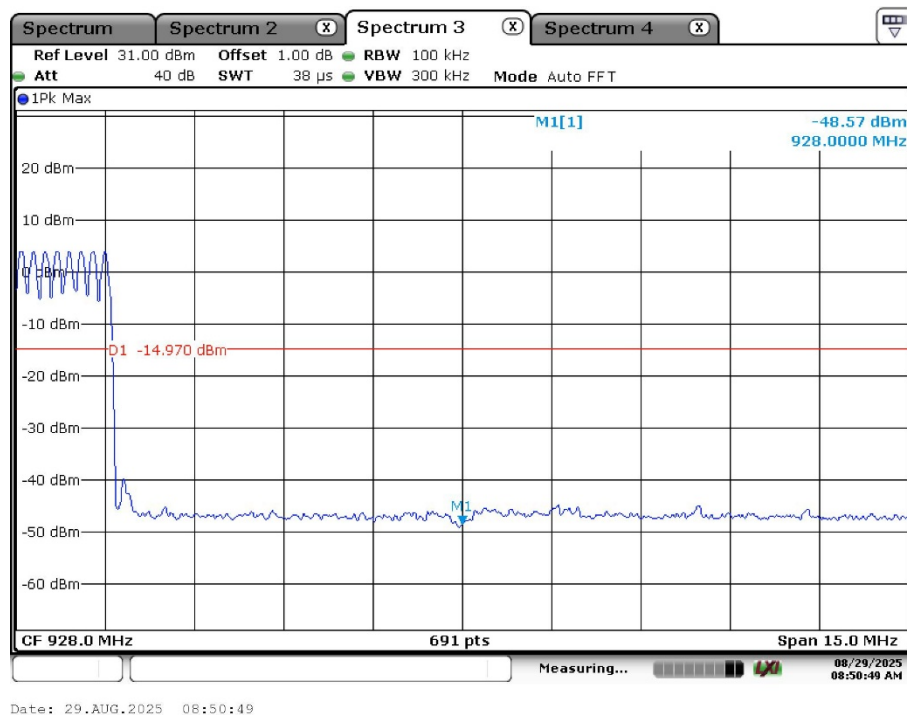


Appendix A.7: Test Results of Conducted Spurious Emission

Fixed mode


Low Channel

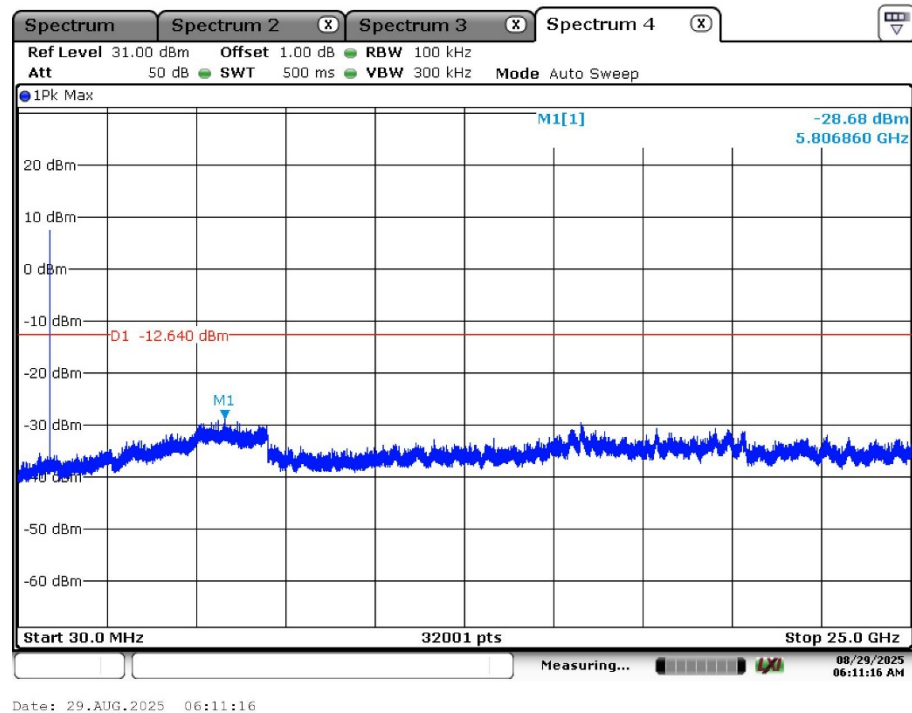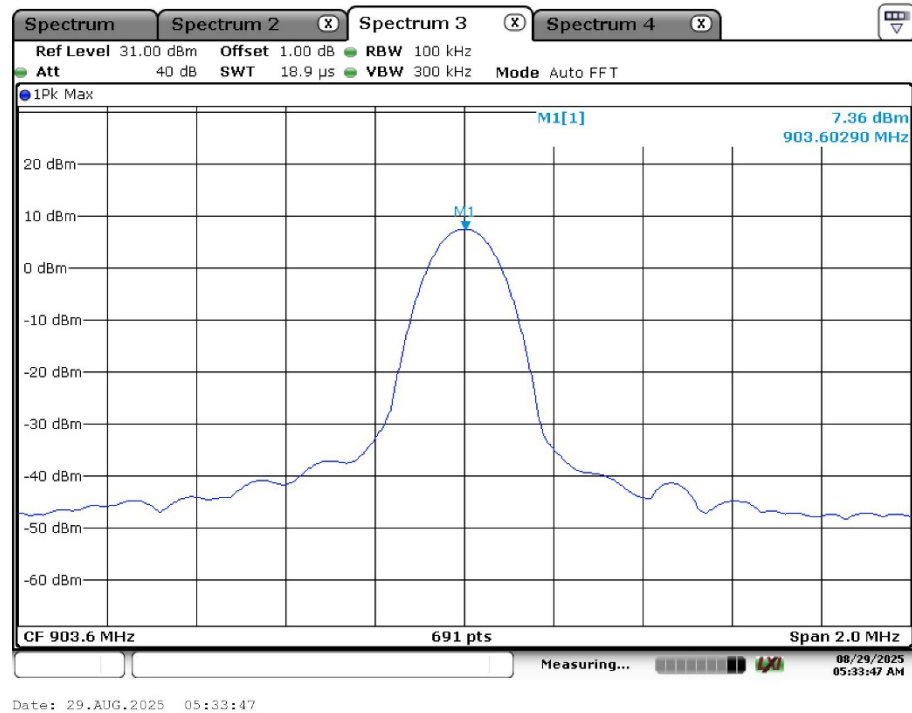

Middle Channel

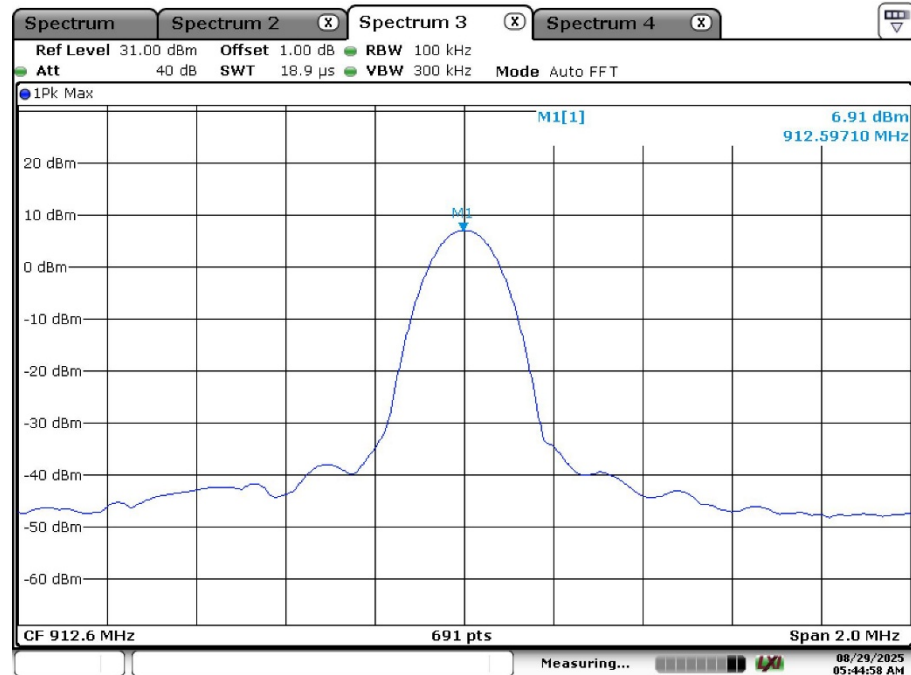


Date: 29.AUG.2025 05:44:58

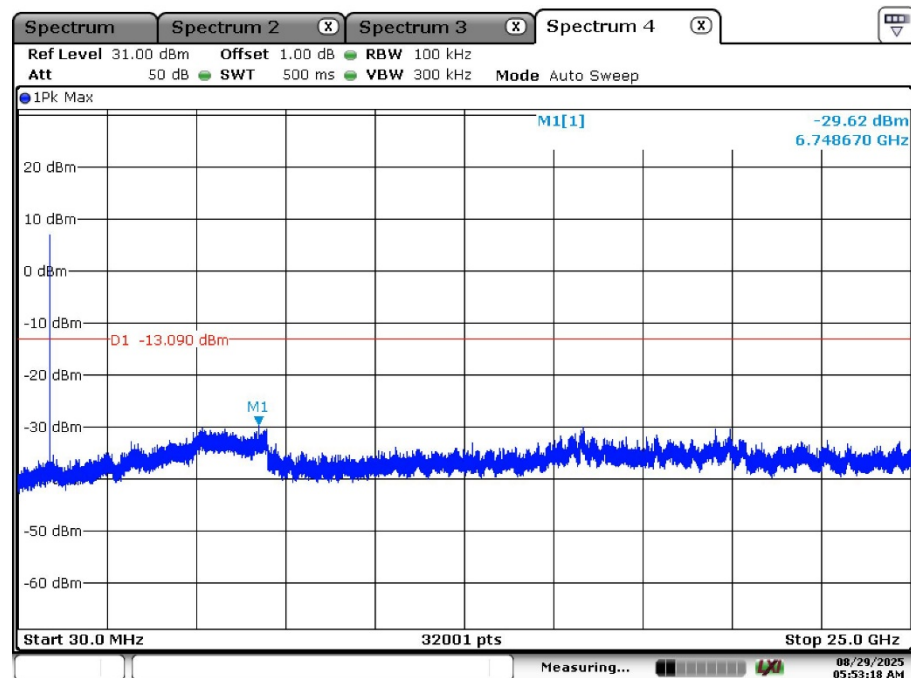


Date: 29.AUG.2025 05:53:18

High Channel

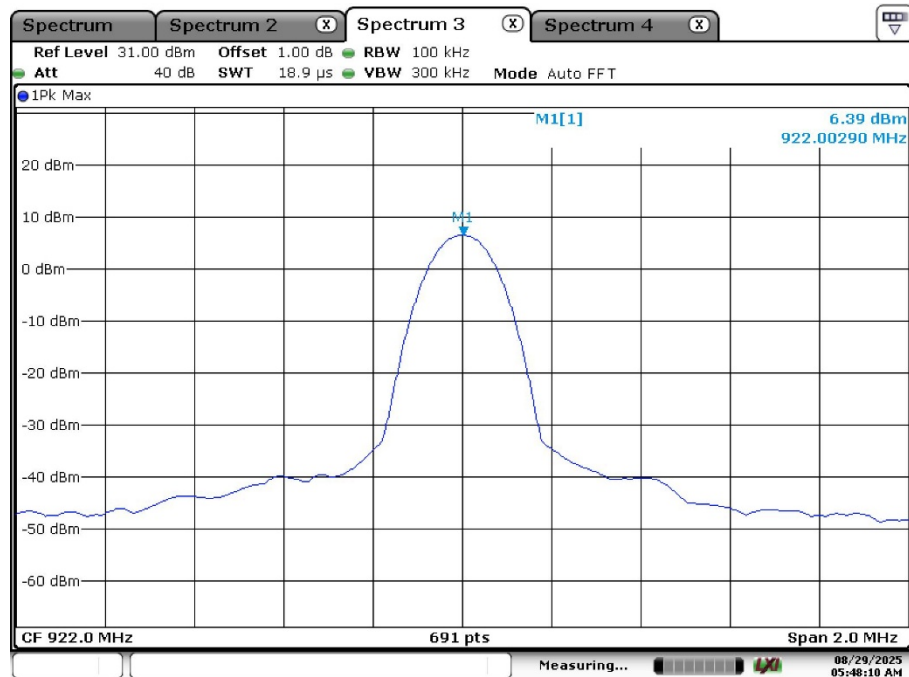


Date: 29.AUG.2025 05:48:10

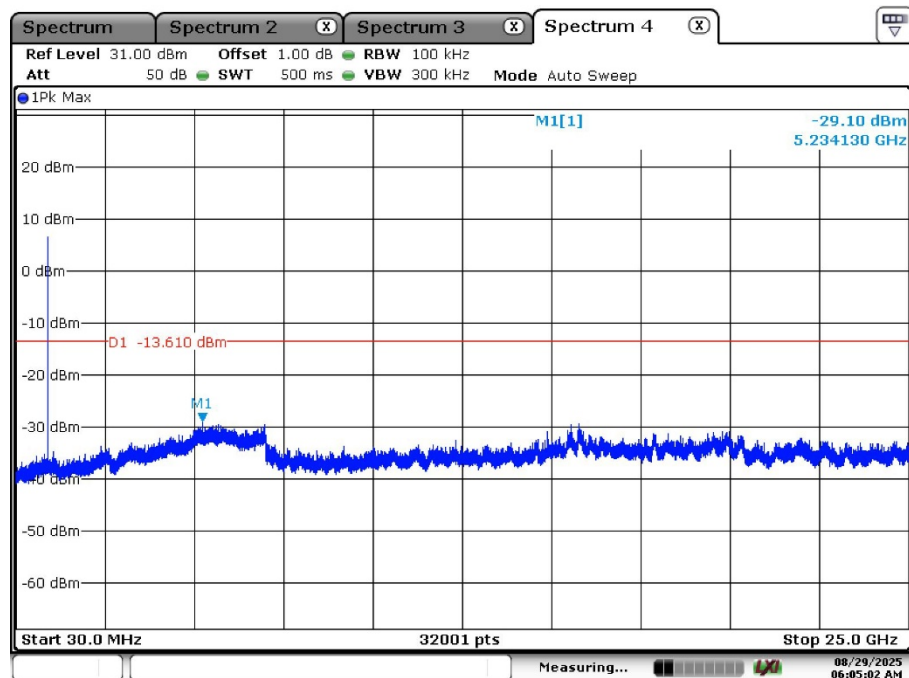


Date: 29.AUG.2025 06:05:03

Hopping mode

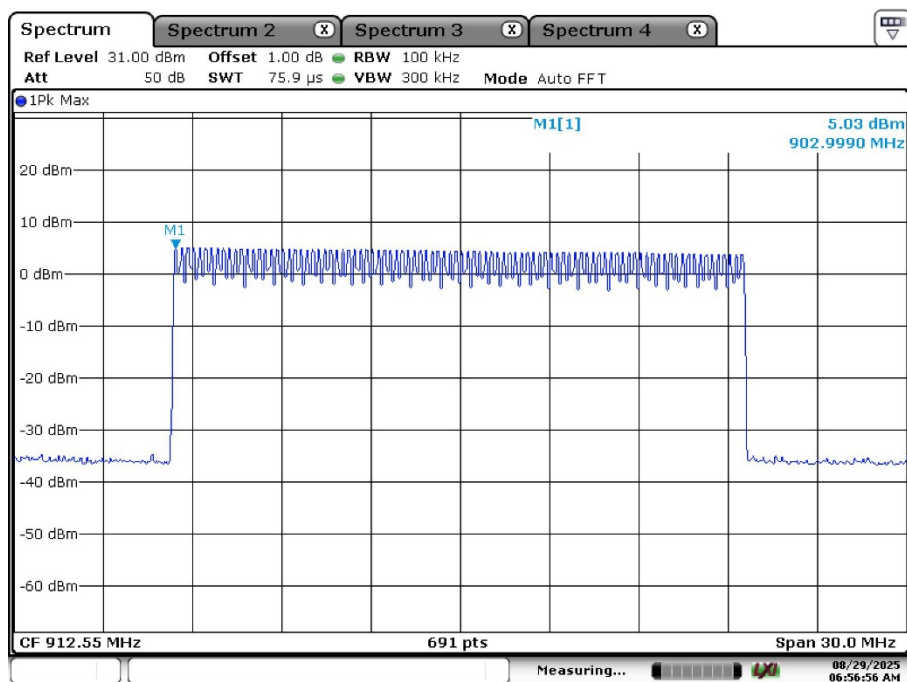

Date: 29.AUG.2025 06:56:56

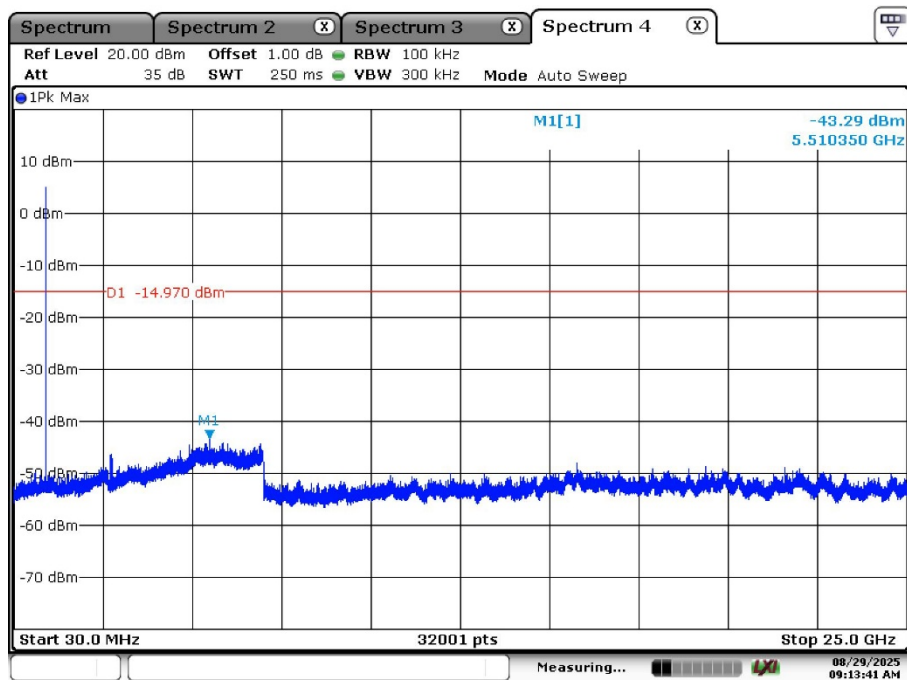

Date: 29.AUG.2025 09:13:42

Appendix A.8: Test Results of Radiated Spurious Emissions


Note:

- 1) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and above 10GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 10GHz were reported.
- 2) The highest waveform in the figure is 915MHz Band SRD Fundamental.

30 MHz - 1GHz

EUT Information

EUT Name:	Remote Control
Model:	TCT-E10S Pro
Test Mode:	915MHz band SRD_903MHz
Order No/Sample No:	168496151/A004057978-004
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

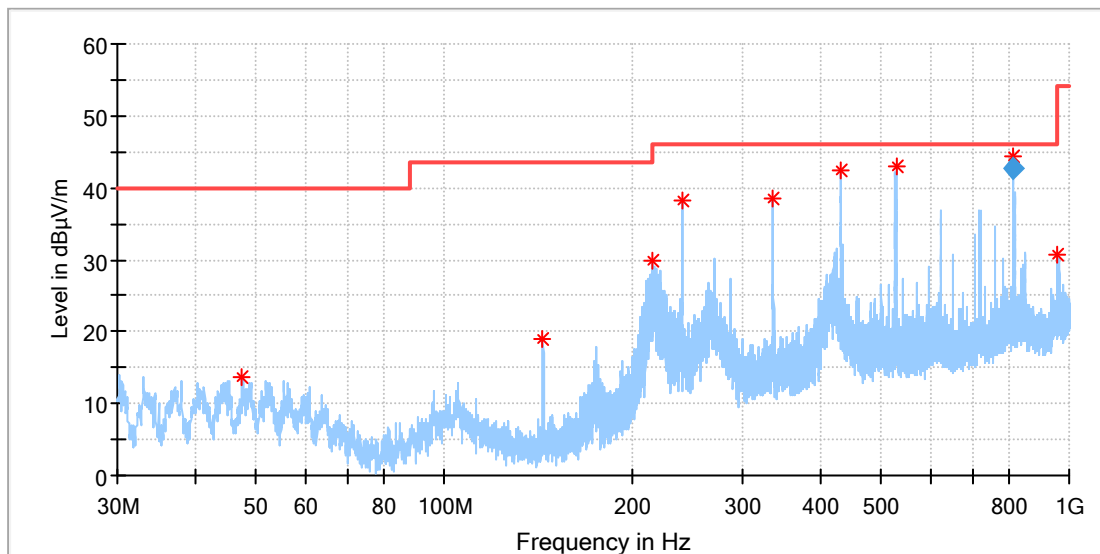

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
47.571923	13.75	40.00	26.25	100.0	H	52.0	-18.6
143.975000	18.86	43.50	24.64	100.0	H	223.0	-22.3
215.680385	29.73	43.50	13.77	100.0	H	299.0	-18.7
239.967692	38.13	46.00	7.87	100.0	H	174.0	-17.7
335.997692	38.48	46.00	7.52	100.0	H	174.0	-15.2
431.990385	42.54	46.00	3.46	100.0	H	359.0	-13.1
528.095000	42.92	46.00	3.08	100.0	H	158.0	-11.3
815.905616	44.35	46.00	1.65	100.0	H	252.0	-5.3
959.968846	30.70	46.00	15.30	100.0	H	96.0	-4.0

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
815.905616	42.75	46.00	3.25	100.0	H	252.0	-5.3

EUT Information

EUT Name:	Remote Control
Model:	TCT-E10S Pro
Test Mode:	915MHz band SRD_903MHz
Order No/Sample No:	168496151/A004057978-004
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

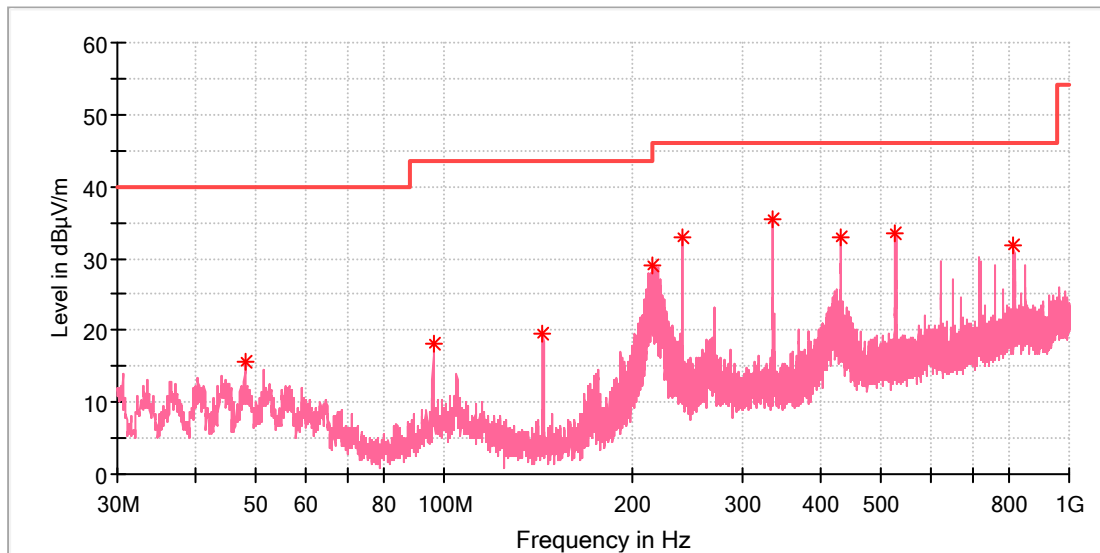

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
47.982308	15.49	40.00	24.51	100.0	V	82.0	-18.6
95.997308	18.14	43.50	25.36	100.0	V	231.0	-19.8
144.012308	19.41	43.50	24.09	100.0	V	0.0	-22.3
214.896923	29.05	43.50	14.45	100.0	V	173.0	-18.8
240.005000	33.02	46.00	12.98	100.0	V	120.0	-17.7
335.997692	35.56	46.00	10.44	100.0	V	294.0	-15.2
431.990385	32.95	46.00	13.05	100.0	V	67.0	-13.1
528.020385	33.39	46.00	12.61	100.0	V	112.0	-11.3
816.147692	31.86	46.00	14.14	100.0	V	241.0	-5.3

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Remote Control
Model:	TCT-E10S Pro
Test Mode:	915MHz band SRD_912MHz
Order No/Sample No:	168496151/A004057978-004
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

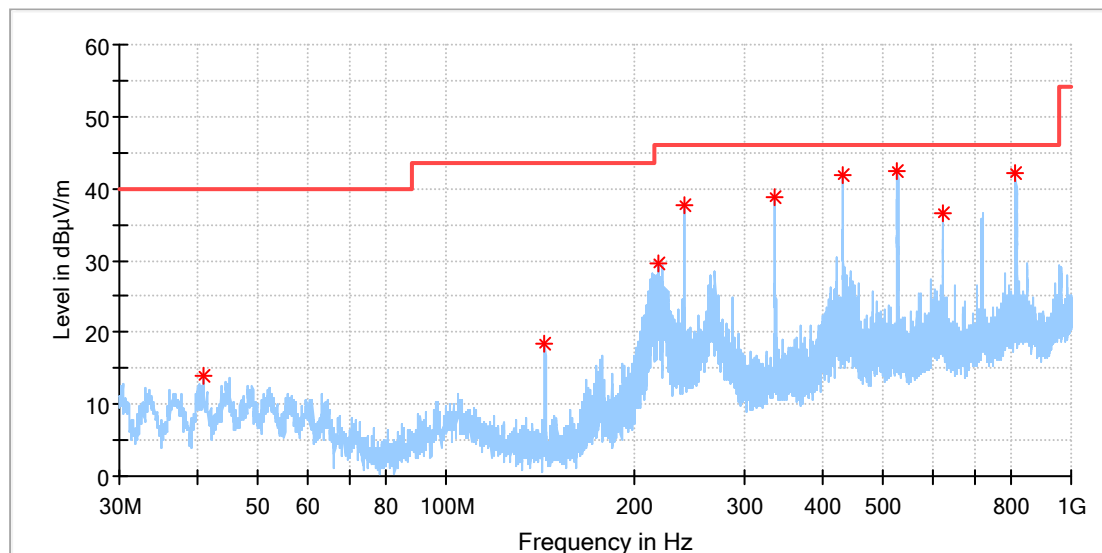

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
40.893846	14.07	40.00	25.93	100.0	H	0.0	-20.0
144.012308	18.44	43.50	25.06	100.0	H	200.0	-22.3
218.142692	29.60	46.00	16.40	100.0	H	281.0	-18.7
239.967692	37.71	46.00	8.29	100.0	H	135.0	-17.7
335.960385	38.70	46.00	7.30	100.0	H	174.0	-15.2
432.027692	41.87	46.00	4.13	100.0	H	0.0	-13.1
528.020385	42.51	46.00	3.49	100.0	H	158.0	-11.3
624.050385	36.43	46.00	9.57	100.0	H	166.0	-9.3
816.222308	42.13	46.00	3.87	100.0	H	271.0	-5.3

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Remote Control
Model:	TCT-E10S Pro
Test Mode:	915MHz band SRD_912MHz
Order No/Sample No:	168496151/A004057978-004
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

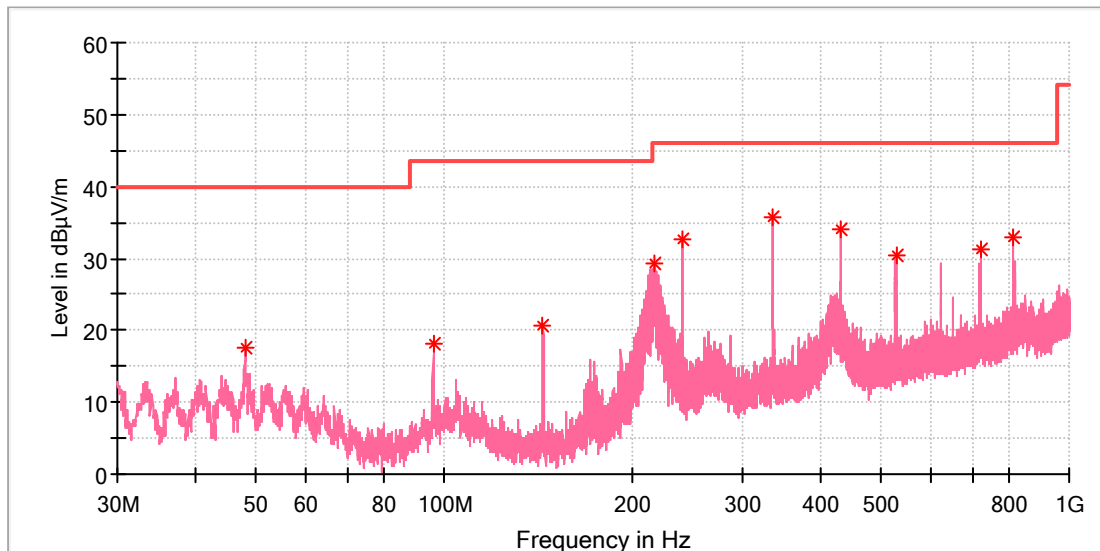

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
48.019615	17.49	40.00	22.51	100.0	V	83.0	-18.6
95.997308	18.15	43.50	25.35	100.0	V	227.0	-19.8
144.012308	20.51	43.50	22.99	100.0	V	6.0	-22.3
217.508462	29.43	46.00	16.57	100.0	V	192.0	-18.7
240.005000	32.54	46.00	13.46	100.0	V	101.0	-17.7
336.035000	35.83	46.00	10.17	100.0	V	359.0	-15.2
431.953077	33.95	46.00	12.05	100.0	V	36.0	-13.1
528.095000	30.29	46.00	15.71	100.0	V	92.0	-11.3
720.155000	31.15	46.00	14.85	100.0	V	0.0	-7.4
815.998462	32.96	46.00	13.04	100.0	V	118.0	-5.3

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Remote Control
Model:	TCT-E10S Pro
Test Mode:	915MHz band SRD_922MHz
Order No/Sample No:	168496151/A004057978-004
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

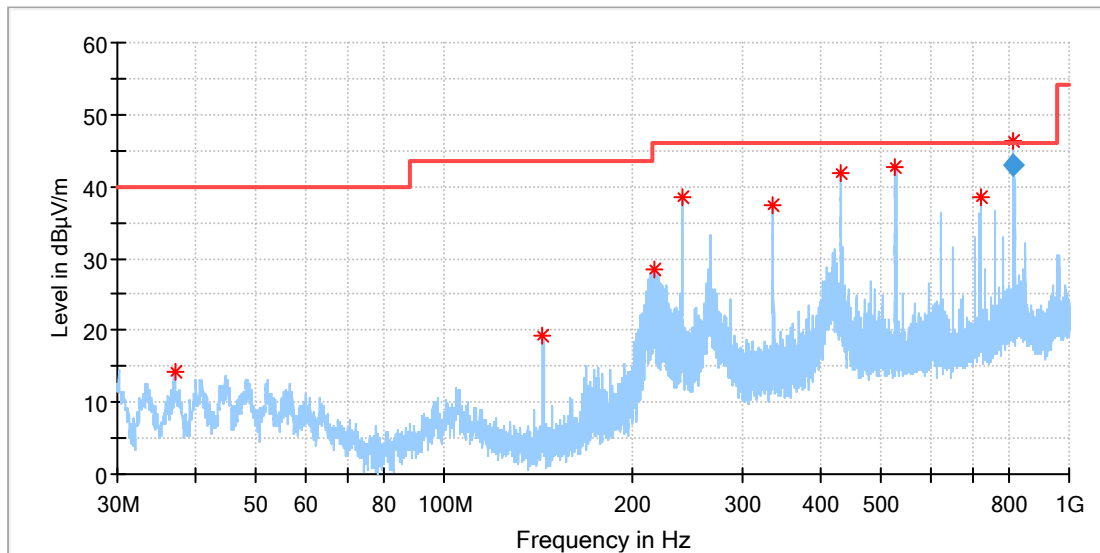

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.051154	14.10	40.00	25.90	100.0	H	32.0	-21.3
144.012308	19.26	43.50	24.24	100.0	H	199.0	-22.3
216.351923	28.58	46.00	17.42	100.0	H	262.0	-18.7
240.005000	38.58	46.00	7.42	100.0	H	149.0	-17.7
335.997692	37.40	46.00	8.60	100.0	H	177.0	-15.2
431.990385	41.76	46.00	4.24	100.0	H	332.0	-13.1
528.020385	42.83	46.00	3.17	100.0	H	149.0	-11.3
720.043077	38.60	46.00	7.40	100.0	H	75.0	-7.4
816.208192	46.38	46.00	-0.38	100.0	H	246.0	-5.3

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
816.208192	42.86	46.00	3.14	100.0	H	246.0	-5.3

EUT Information

EUT Name:	Remote Control
Model:	TCT-E10S Pro
Test Mode:	915MHz band SRD_922MHz
Order No/Sample No:	168496151/A004057978-004
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

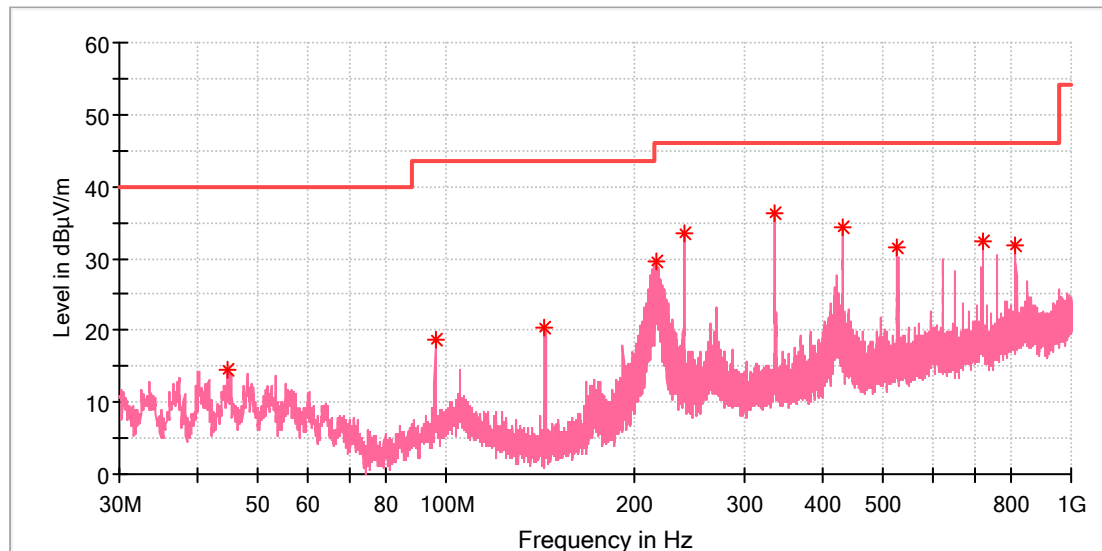

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
44.811154	14.51	40.00	25.49	100.0	V	327.0	-19.0
95.997308	18.83	43.50	24.67	100.0	V	187.0	-19.8
144.012308	20.36	43.50	23.14	100.0	V	336.0	-22.3
216.389231	29.69	46.00	16.31	100.0	V	197.0	-18.7
240.005000	33.42	46.00	12.58	100.0	V	111.0	-17.7
335.997692	36.15	46.00	9.85	100.0	V	272.0	-15.2
431.990385	34.23	46.00	11.77	100.0	V	356.0	-13.1
527.908462	31.65	46.00	14.35	100.0	V	42.0	-11.3
720.080385	32.38	46.00	13.62	100.0	V	348.0	-7.4
816.073077	31.76	46.00	14.24	100.0	V	129.0	-5.3


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Above 1GHz

EUT Information

EUT Name:	Remote Control
Model:	TCT-E10S Pro
Test Mode:	915MHz band SRD_903MHz
Order No/Sample No:	168496151/A004057978-004
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

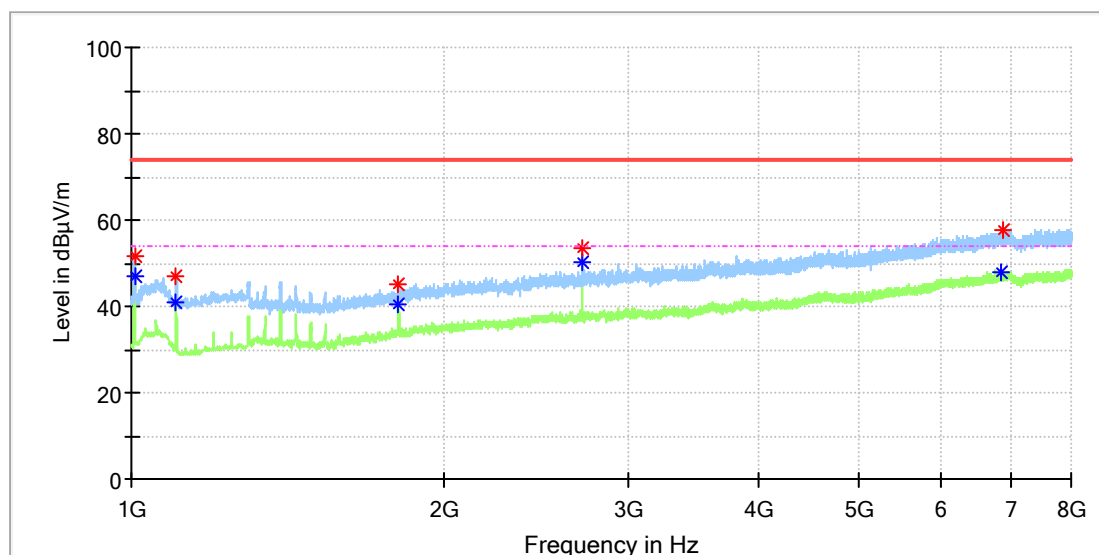

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	PoI	Azimuth (deg)	Corr. (dB/m)
1008.000000	51.58	---	74.00	22.42	150.0	H	39.0	0.4
1008.000000	---	47.15	54.00	6.85	150.0	H	39.0	0.4
1104.000000	47.08	---	74.00	26.92	150.0	H	13.0	0.6
1104.000000	---	41.06	54.00	12.94	150.0	H	13.0	0.6
1806.966667	45.02	---	74.00	28.98	150.0	H	34.0	6.3
1806.966667	---	40.45	54.00	13.55	150.0	H	34.0	6.3
2710.908333	53.35	---	74.00	20.65	150.0	H	247.0	9.1
2710.908333	---	50.17	54.00	3.83	150.0	H	247.0	9.1
6853.741667	---	48.00	54.00	6.00	150.0	H	332.0	18.6
6881.100000	57.51	---	74.00	16.49	150.0	H	312.0	18.7

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	----

EUT Information

EUT Name:	Remote Control
Model:	TCT-E10S Pro
Test Mode:	915MHz band SRD_903MHz
Order No/Sample No:	168496151/A004057978-004
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

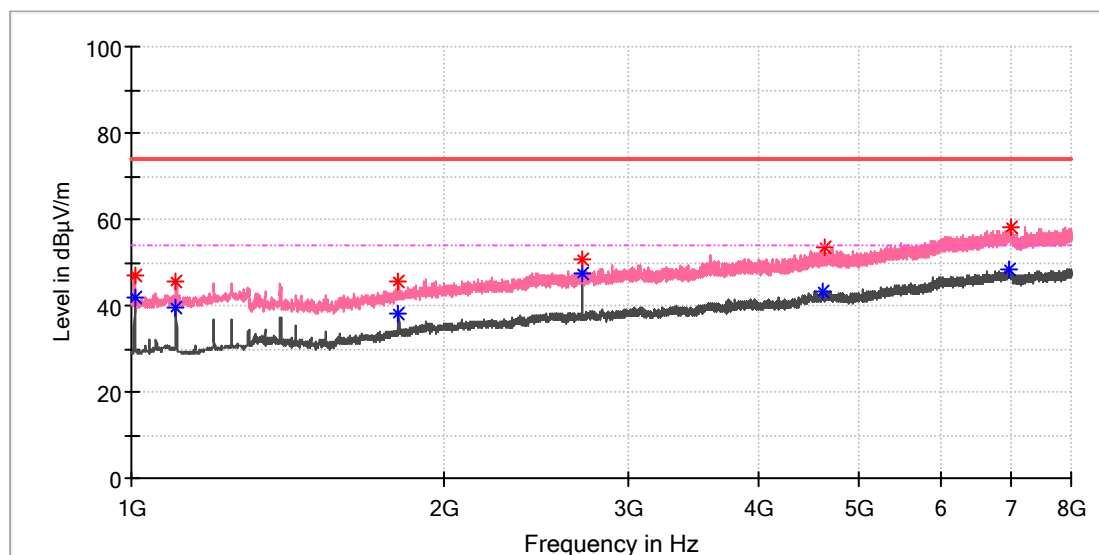

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1007.500000	---	41.68	54.00	12.32	150.0	V	60.0	0.4
1008.000000	46.91	---	74.00	27.09	150.0	V	87.0	0.4
1104.000000	---	39.77	54.00	14.23	150.0	V	75.0	0.6
1104.500000	45.61	---	74.00	28.39	150.0	V	94.0	0.6
1806.966667	45.41	---	74.00	28.59	150.0	V	170.0	6.3
1806.966667	---	38.17	54.00	15.83	150.0	V	170.0	6.3
2710.908333	50.56	---	74.00	23.44	150.0	V	64.0	9.1
2710.908333	---	47.44	54.00	6.56	150.0	V	64.0	9.1
4619.291667	---	43.42	54.00	10.58	150.0	V	277.0	13.5
4636.041667	53.30	---	74.00	20.70	150.0	V	213.0	13.5
6983.833333	---	48.58	54.00	5.42	150.0	V	233.0	19.0
7010.075000	58.21	---	74.00	15.79	150.0	V	158.0	19.1

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	-----

EUT Information

EUT Name: Remote Control
Model: TCT-E10S Pro
Test Mode: 915MHz band SRD_912MHz
Order No/Sample No: 168496151/A004057978-004
Test Voltage: Battery
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

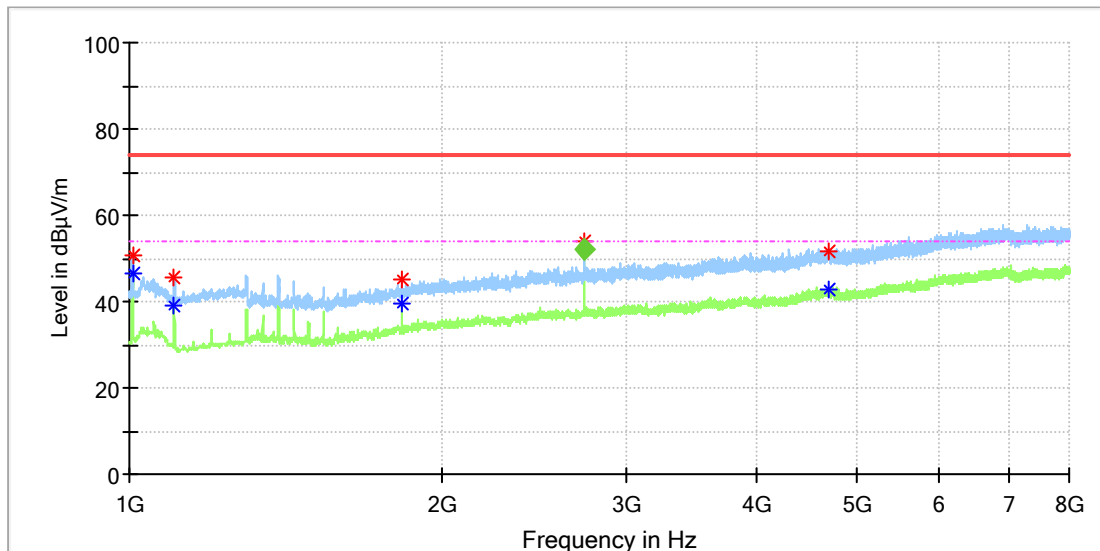

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1008.000000	---	46.51	54.00	7.49	150.0	H	49.0	0.4
1008.500000	50.82	---	74.00	23.18	150.0	H	41.0	0.4
1104.000000	---	38.87	54.00	15.13	150.0	H	339.0	0.6
1104.500000	45.53	---	74.00	28.47	150.0	H	355.0	0.6
1824.833333	45.16	---	74.00	28.84	150.0	H	89.0	6.4
1824.833333	---	39.65	54.00	14.35	150.0	H	89.0	6.4
2737.708333	54.11	---	74.00	19.89	150.0	H	249.0	9.3
4689.083333	---	42.88	54.00	11.12	150.0	H	123.0	13.5
4693.550000	51.80	---	74.00	22.20	150.0	H	304.0	13.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2737.703333	---	51.92	54.00	2.08	150.0	H	249.0	9.3

EUT Information

EUT Name:	Remote Control
Model:	TCT-E10S Pro
Test Mode:	915MHz band SRD_912MHz
Order No/Sample No:	168496151/A004057978-004
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

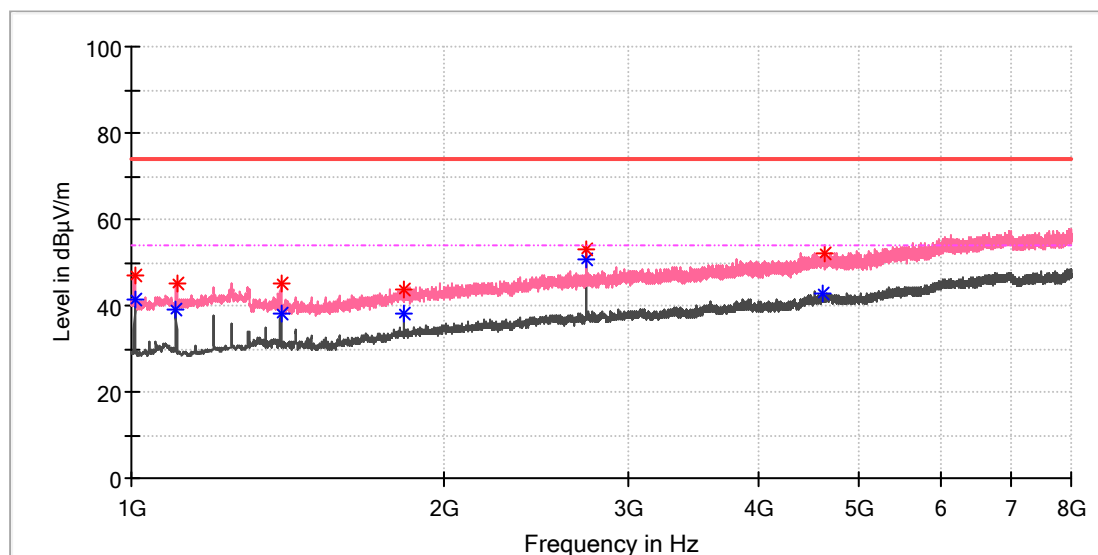

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1007.500000	47.03	---	74.00	26.97	150.0	V	69.0	0.4
1008.000000	---	41.32	54.00	12.68	150.0	V	69.0	0.4
1104.000000	---	39.02	54.00	14.98	150.0	V	115.0	0.6
1105.000000	45.30	---	74.00	28.70	150.0	V	101.0	0.6
1391.566667	---	38.32	54.00	15.68	150.0	V	0.0	3.2
1392.125000	45.24	---	74.00	28.76	150.0	V	199.0	3.2
1824.275000	43.61	---	74.00	30.39	150.0	V	126.0	6.4
1824.833333	---	38.22	54.00	15.78	150.0	V	307.0	6.4
2737.708333	53.06	---	74.00	20.95	150.0	V	182.0	9.3
2737.708333	---	50.87	54.00	3.13	150.0	V	182.0	9.3
4619.291667	---	42.88	54.00	11.12	150.0	V	108.0	13.5
4629.900000	51.87	---	74.00	22.13	150.0	V	81.0	13.5


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.000000	100.000000	100.000000	100.000000	100.000000	100.000000		100.000000	100.000000

EUT Information

EUT Information

EUT Name: Remote Control
Model: TCT-E10S Pro
Test Mode: 915MHz band SRD_922MHz
Order No/Sample No: 168496151/A004057978-004
Test Voltage: Battery
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

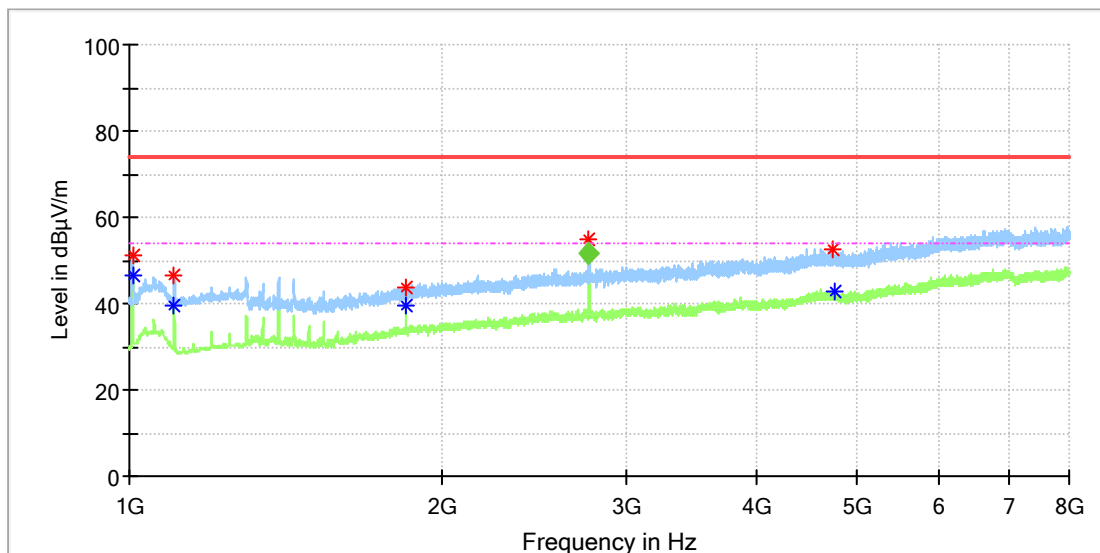

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1007.500000	51.32	---	74.00	22.68	150.0	H	52.0	0.4
1008.000000	---	46.64	54.00	7.36	150.0	H	52.0	0.4
1104.000000	---	39.60	54.00	14.40	150.0	H	15.0	0.6
1104.500000	46.28	---	74.00	27.72	150.0	H	240.0	0.6
1843.816667	43.79	---	74.00	30.21	150.0	H	293.0	6.4
1843.816667	---	39.33	54.00	14.67	150.0	H	293.0	6.4
2766.183333	54.96	---	74.00	19.04	150.0	H	327.0	9.4
4743.800000	52.50	---	74.00	21.50	150.0	H	240.0	13.4
4755.525000	---	42.83	54.00	11.17	150.0	H	174.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2765.948333	---	51.82	54.00	2.18	150.0	H	327.0	9.4

EUT Information

EUT Name: Remote Control
Model: TCT-E10S Pro
Test Mode: 915MHz band SRD_922MHz
Order No/Sample No: 168496151/A004057978-004
Test Voltage: Battery
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

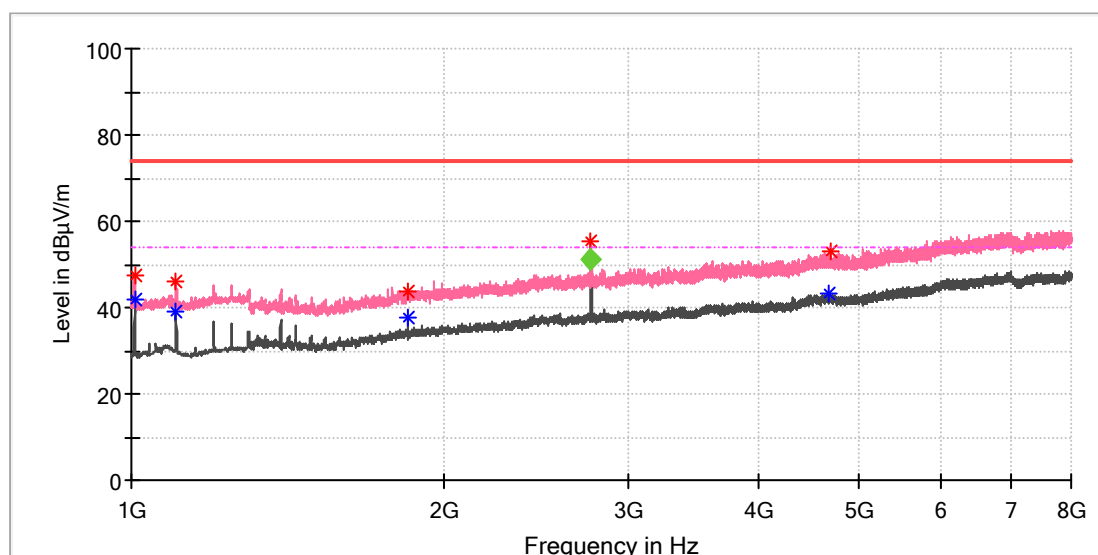

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1008.000000	47.39	---	74.00	26.61	150.0	V	85.0	0.4
1008.000000	---	41.94	54.00	12.06	150.0	V	85.0	0.4
1103.500000	45.82	---	74.00	28.18	150.0	V	105.0	0.6
1104.000000	---	39.15	54.00	14.85	150.0	V	105.0	0.6
1843.816667	---	37.78	54.00	16.22	150.0	V	320.0	6.4
1845.491667	43.91	---	74.00	30.09	150.0	V	189.0	6.5
2766.183333	55.22	---	74.00	18.78	150.0	V	189.0	9.4
4675.683333	---	43.33	54.00	10.67	150.0	V	96.0	13.5
4692.991667	52.83	---	74.00	21.17	150.0	V	115.0	13.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2766.290000	---	51.24	54.00	2.76	150.0	V	177.0	9.4

