




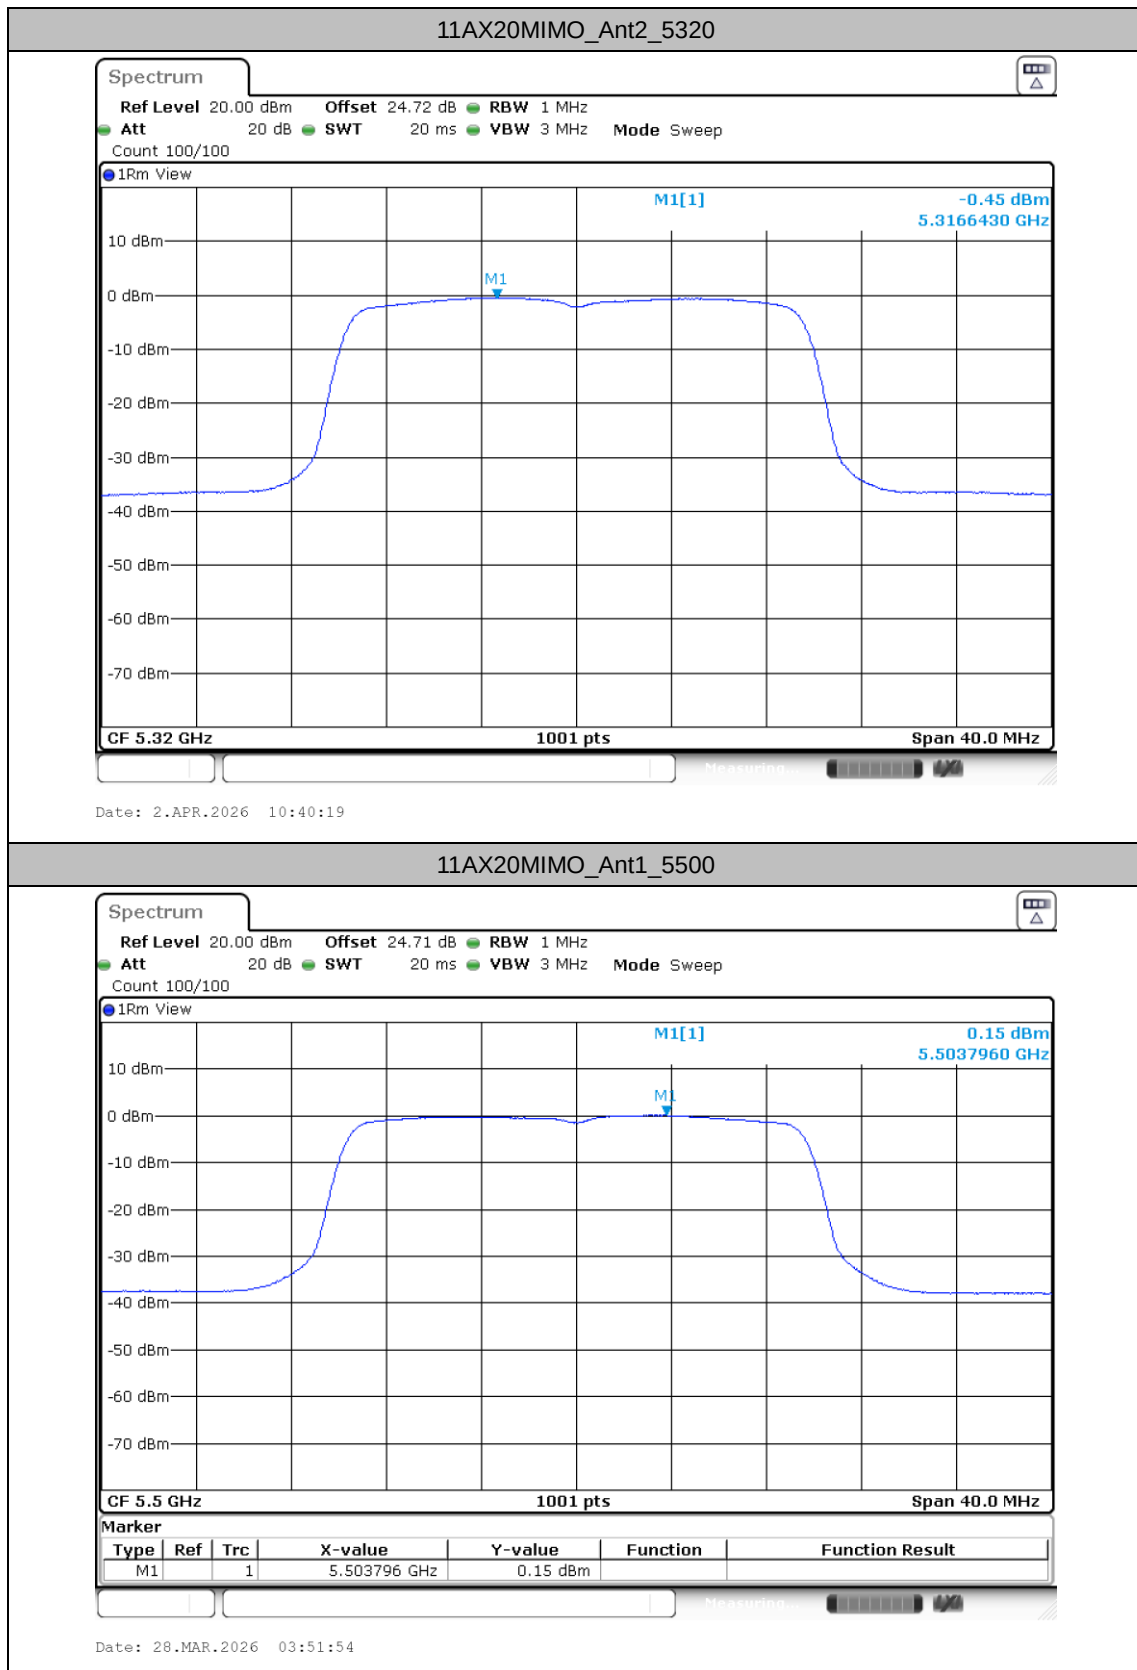
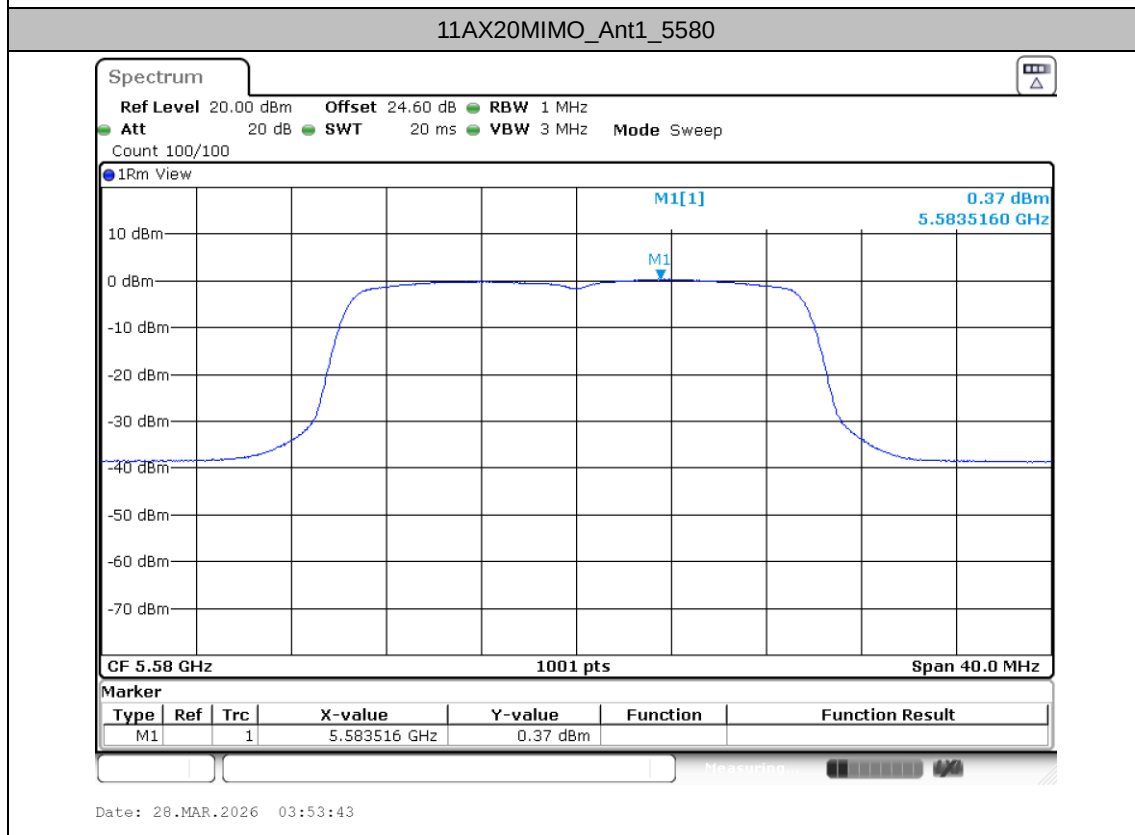


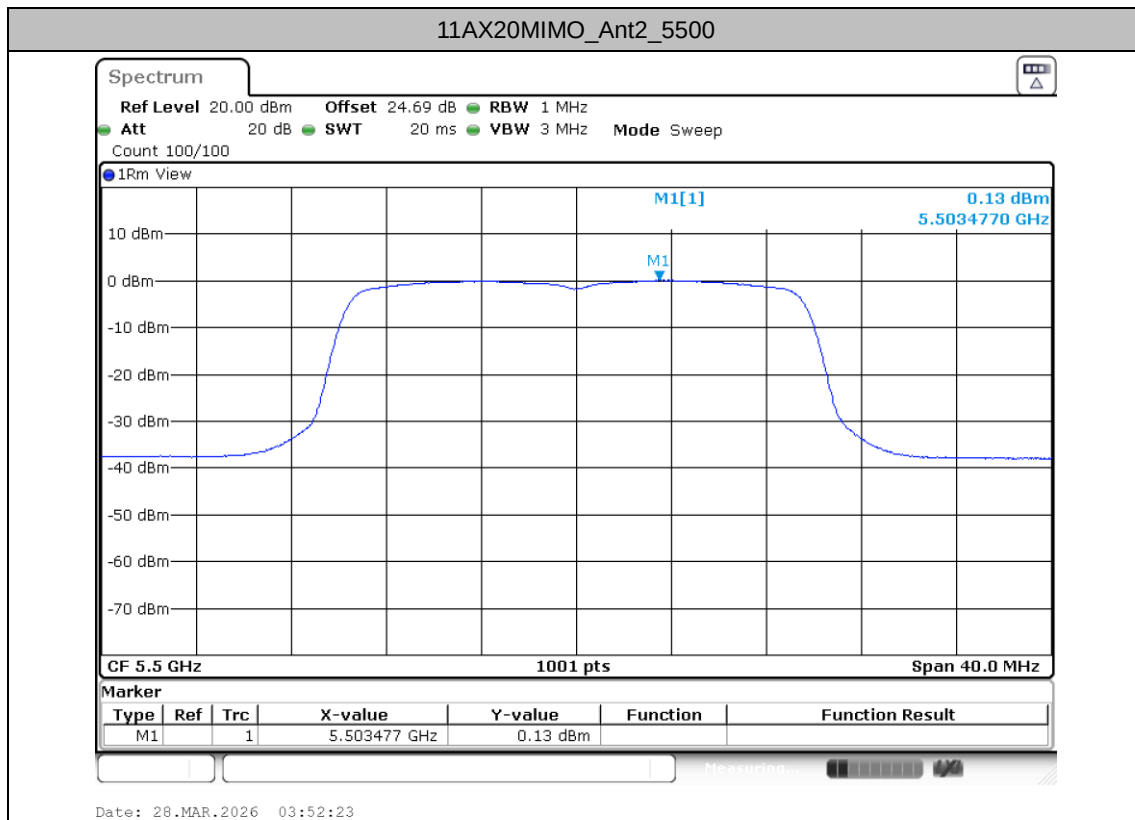


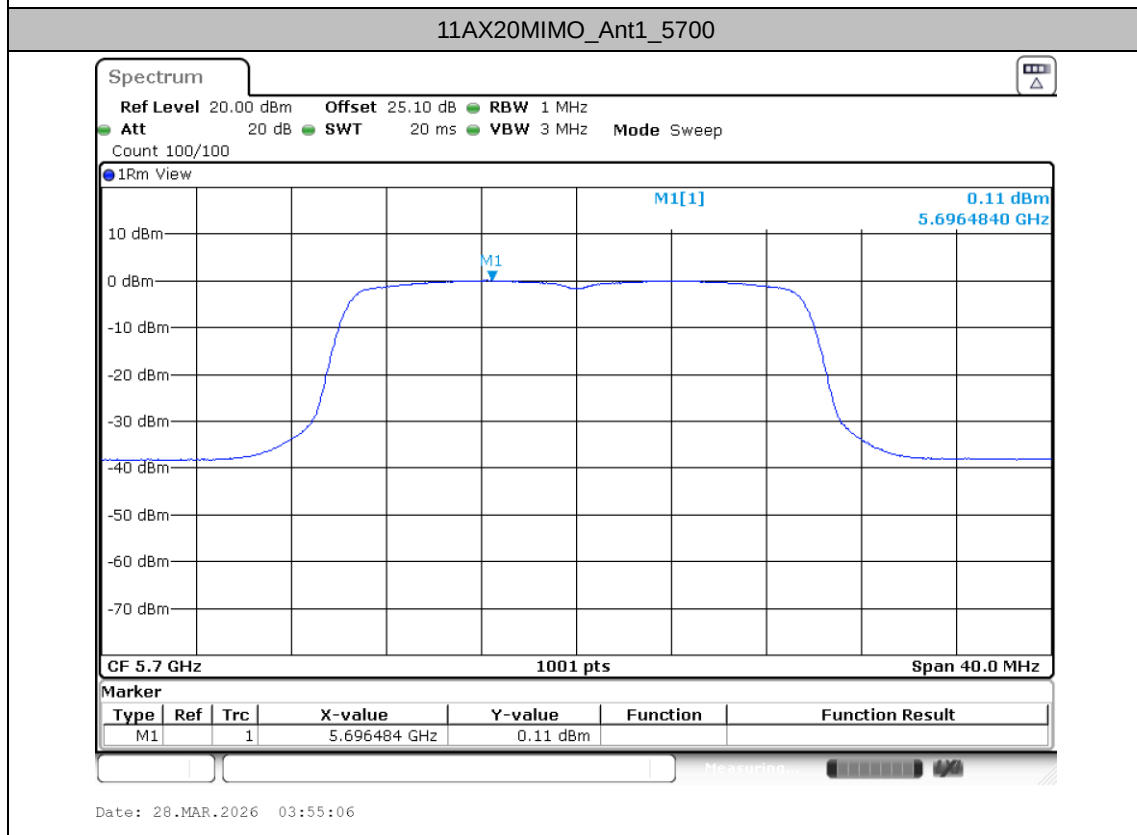



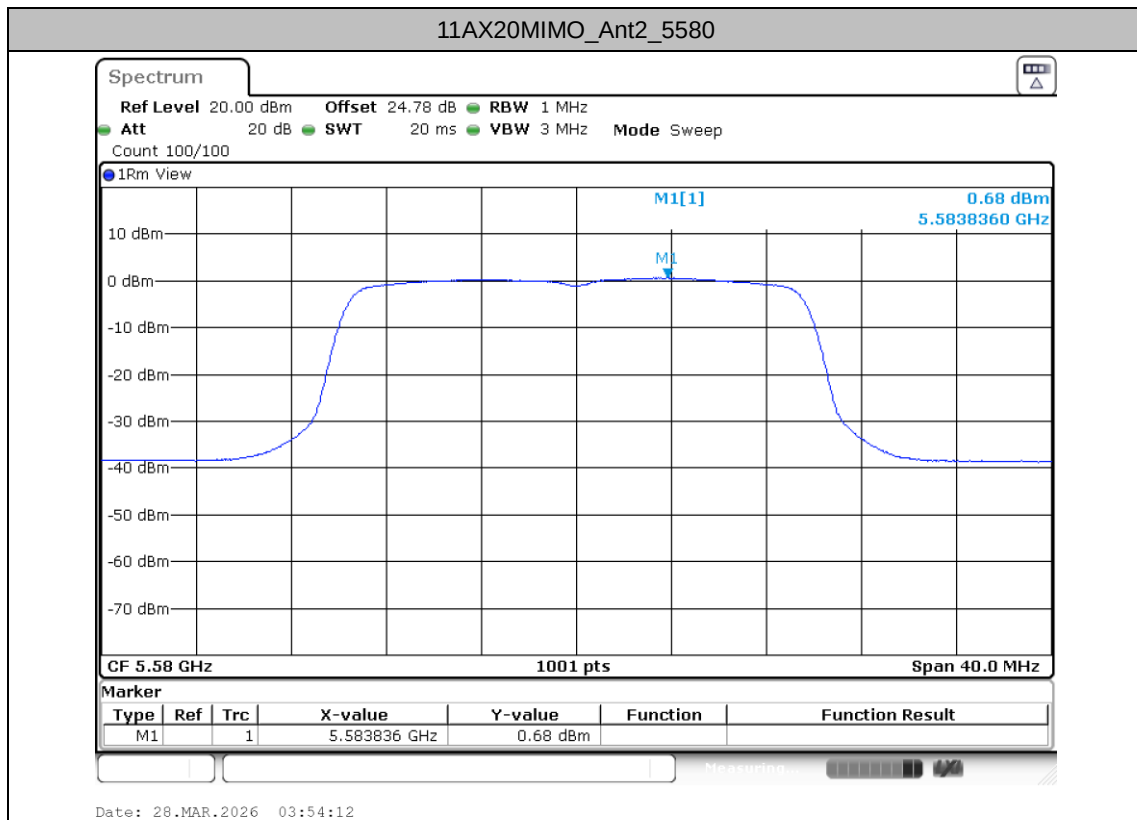


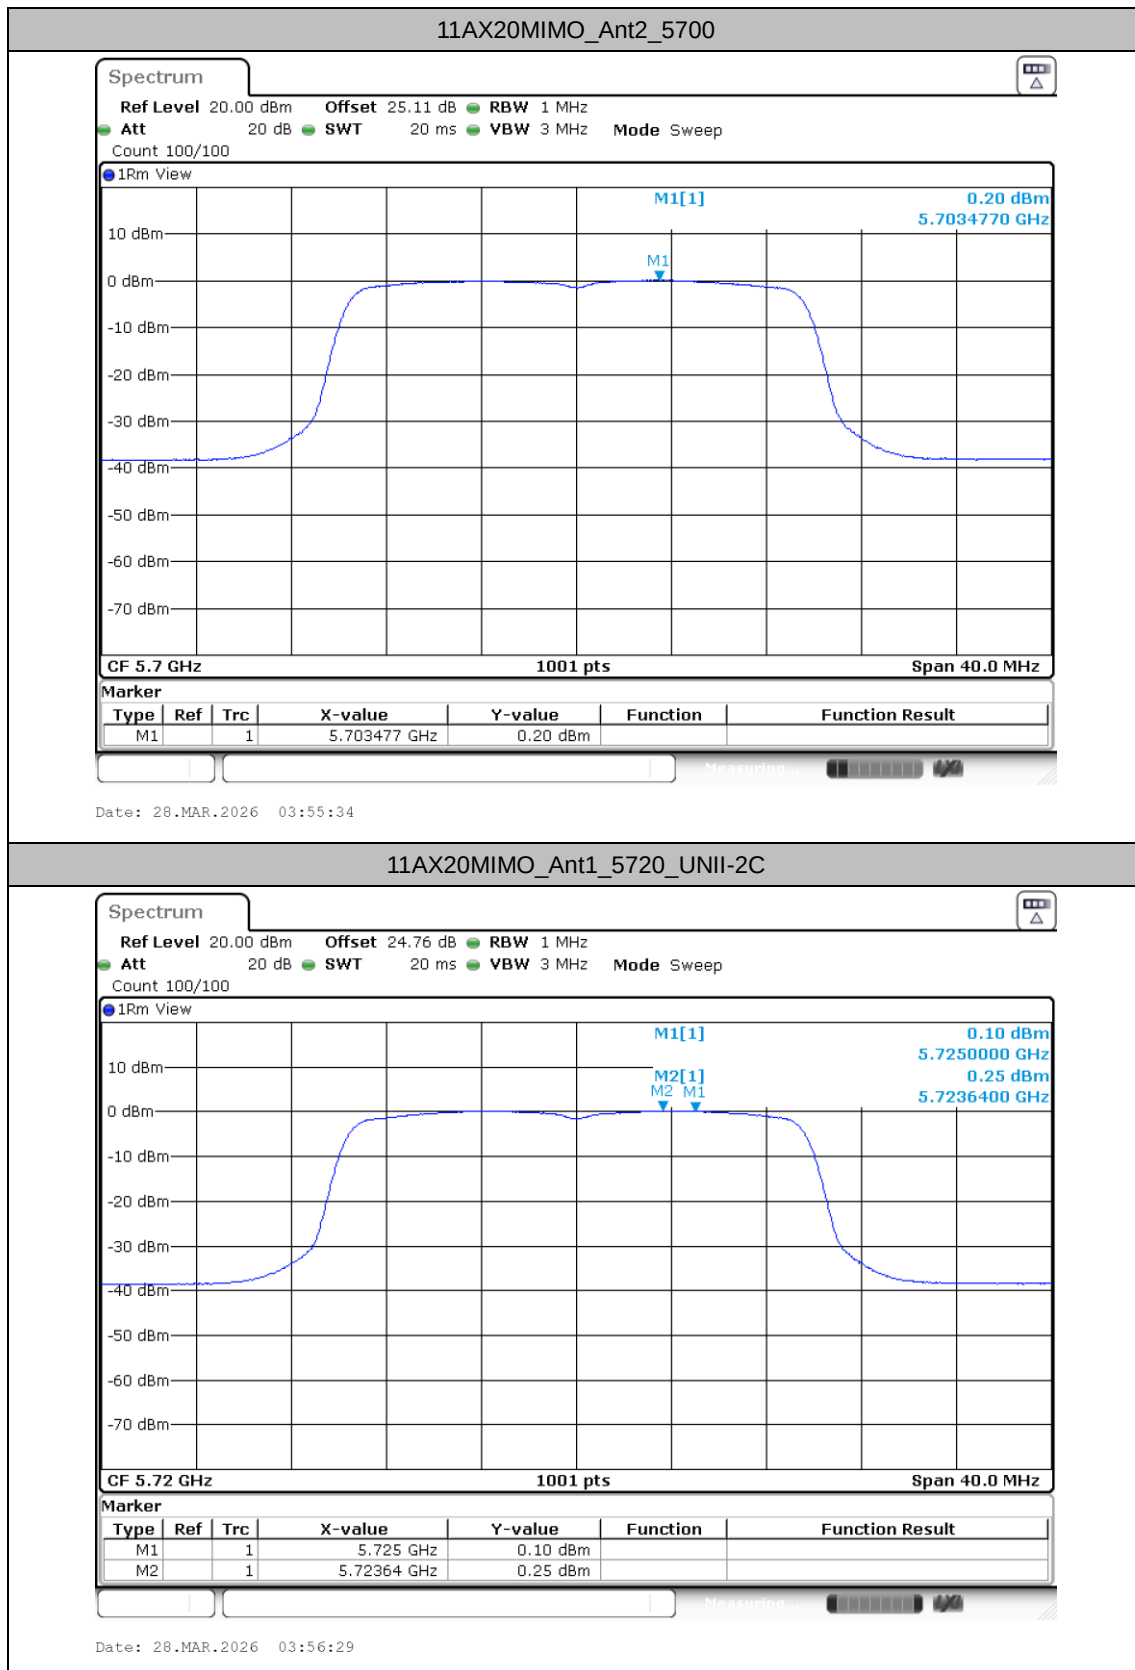



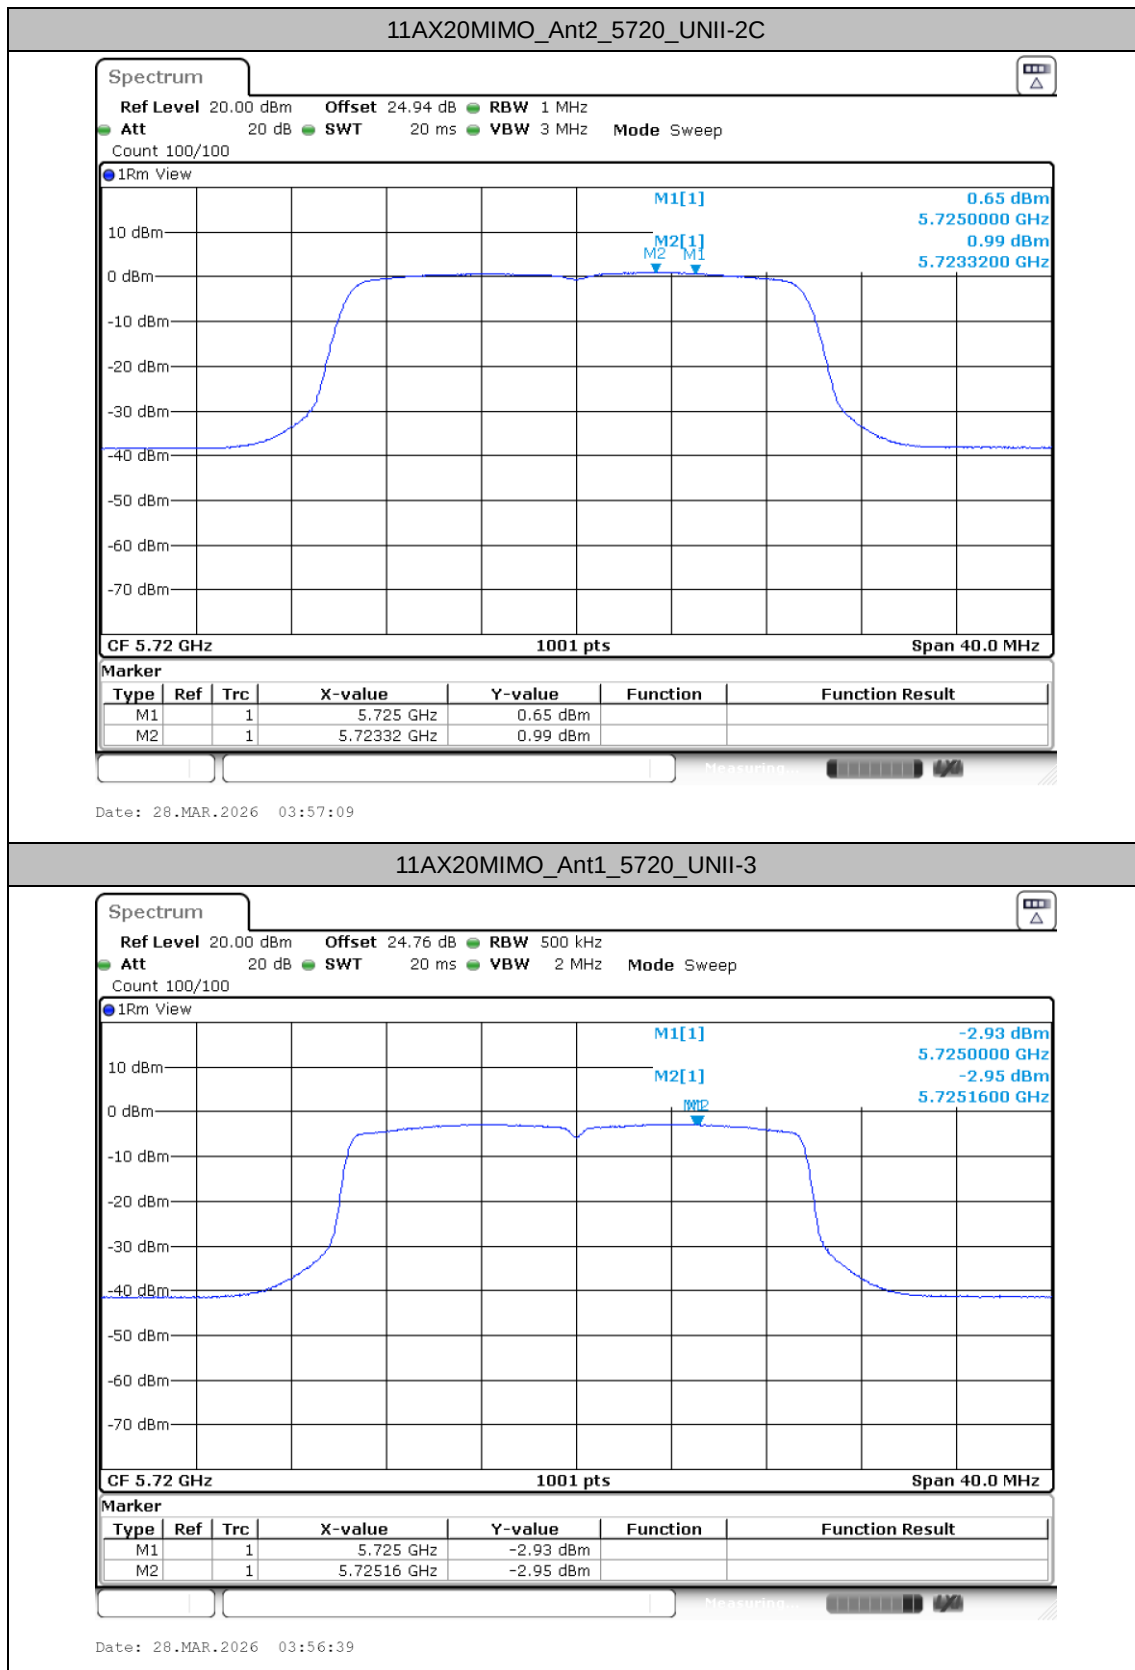



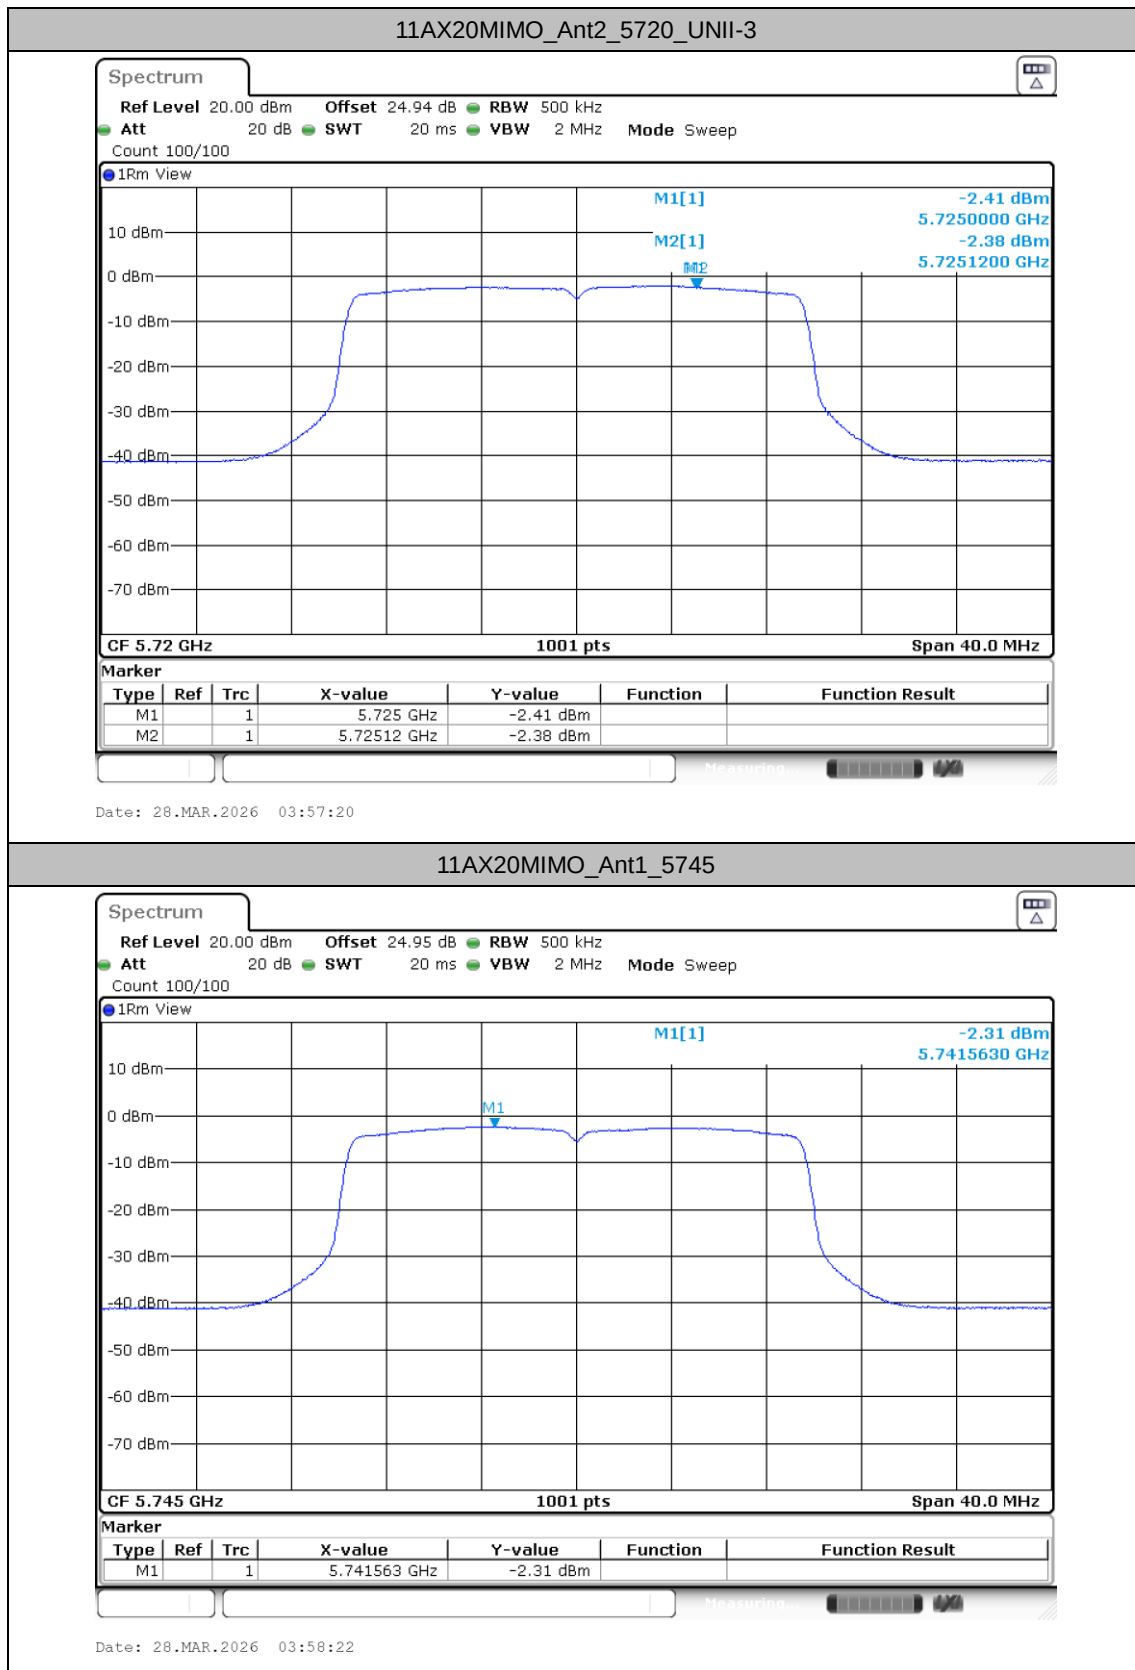



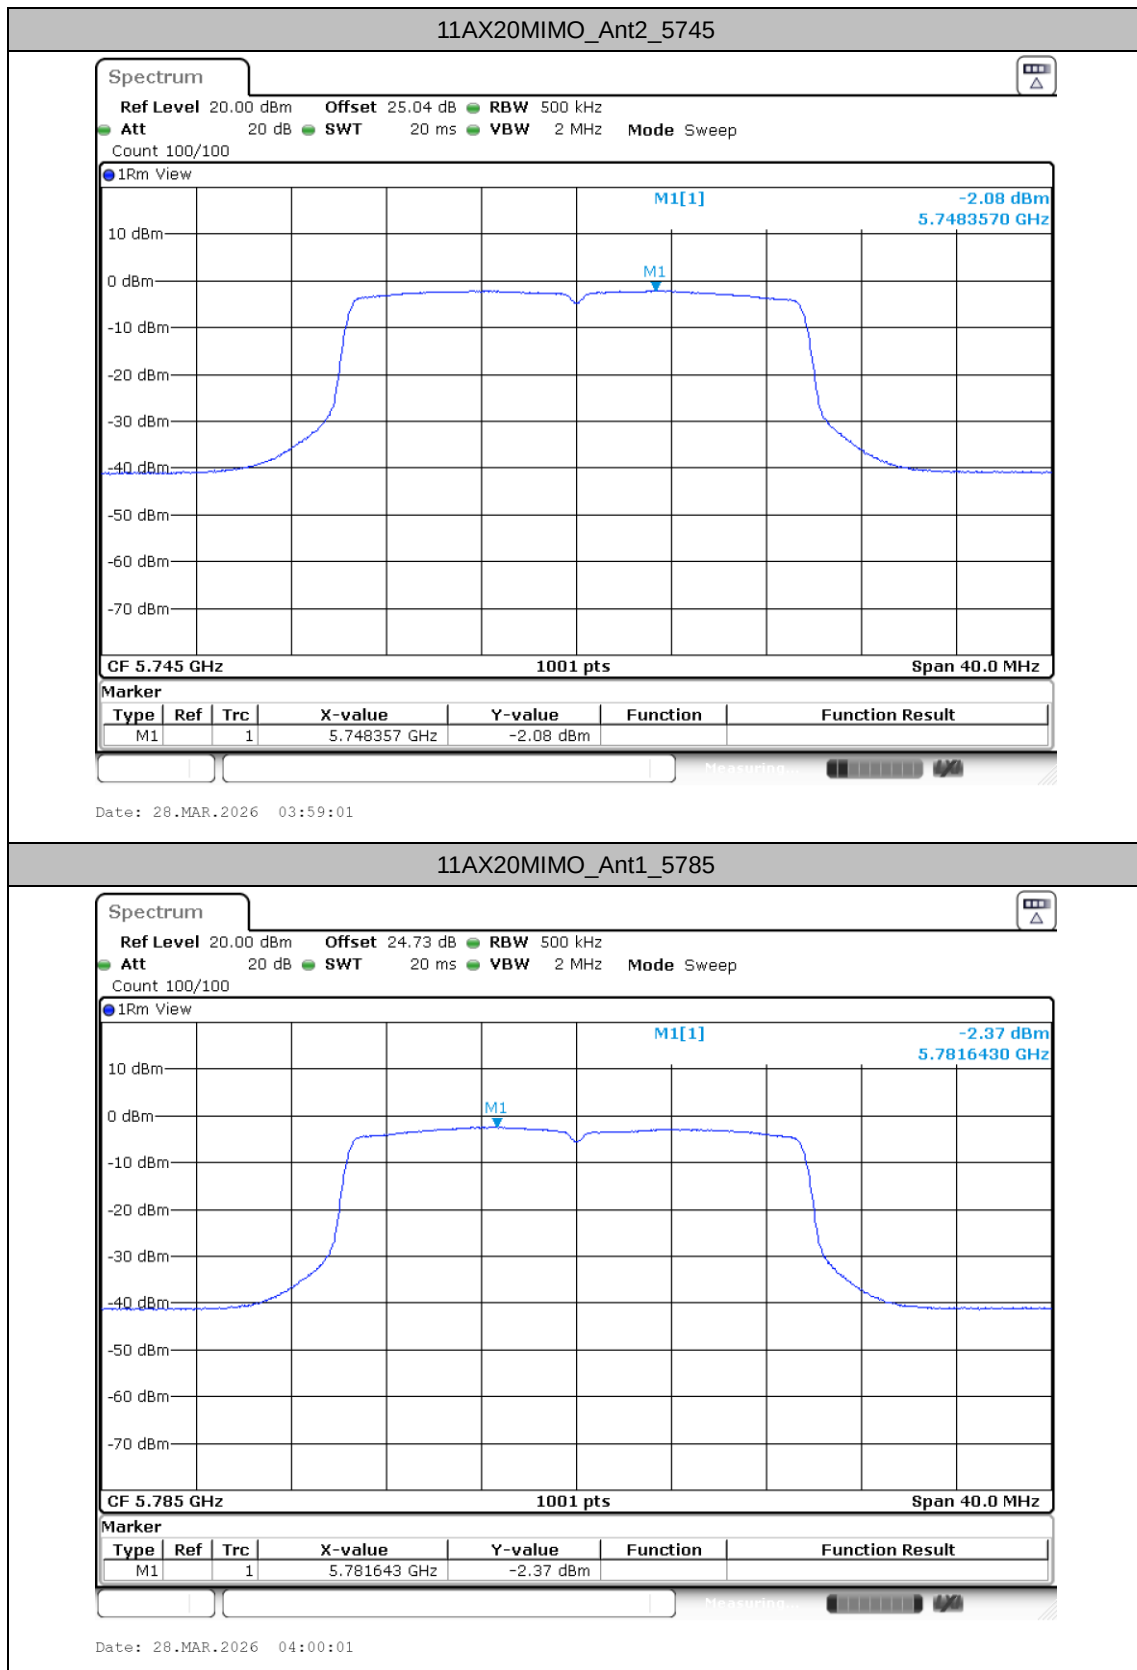


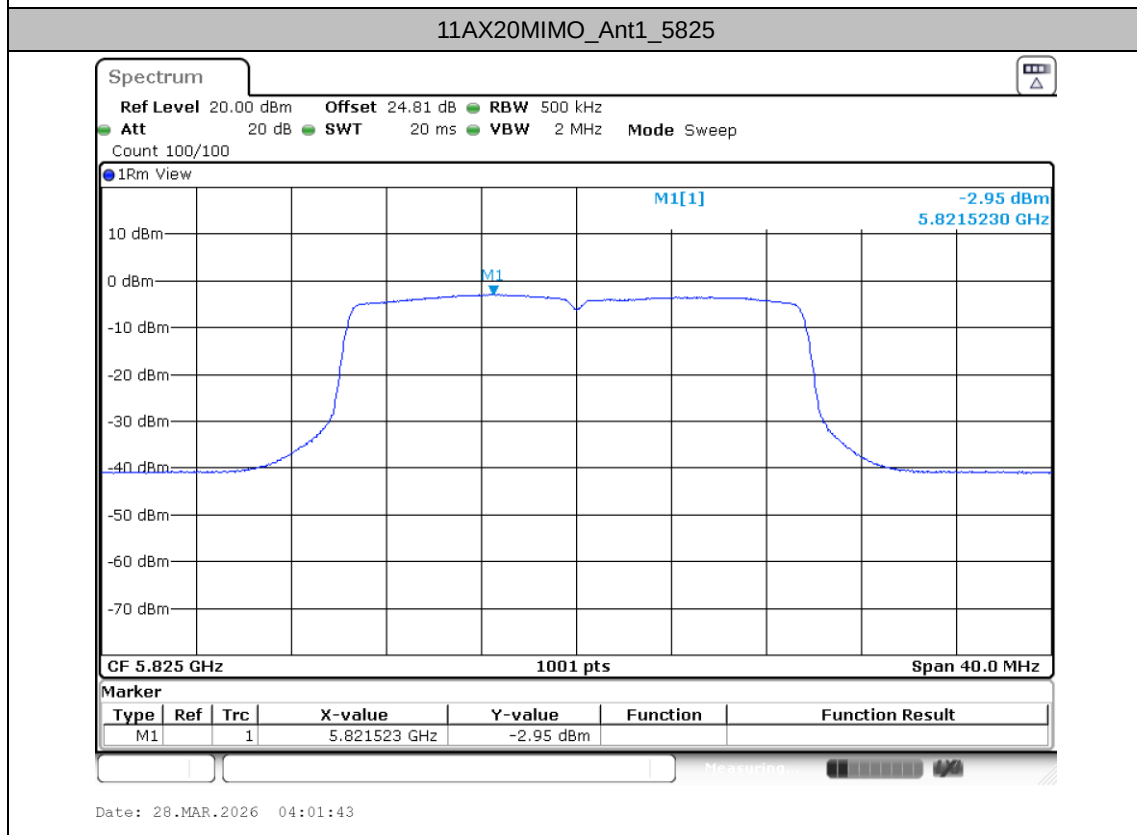
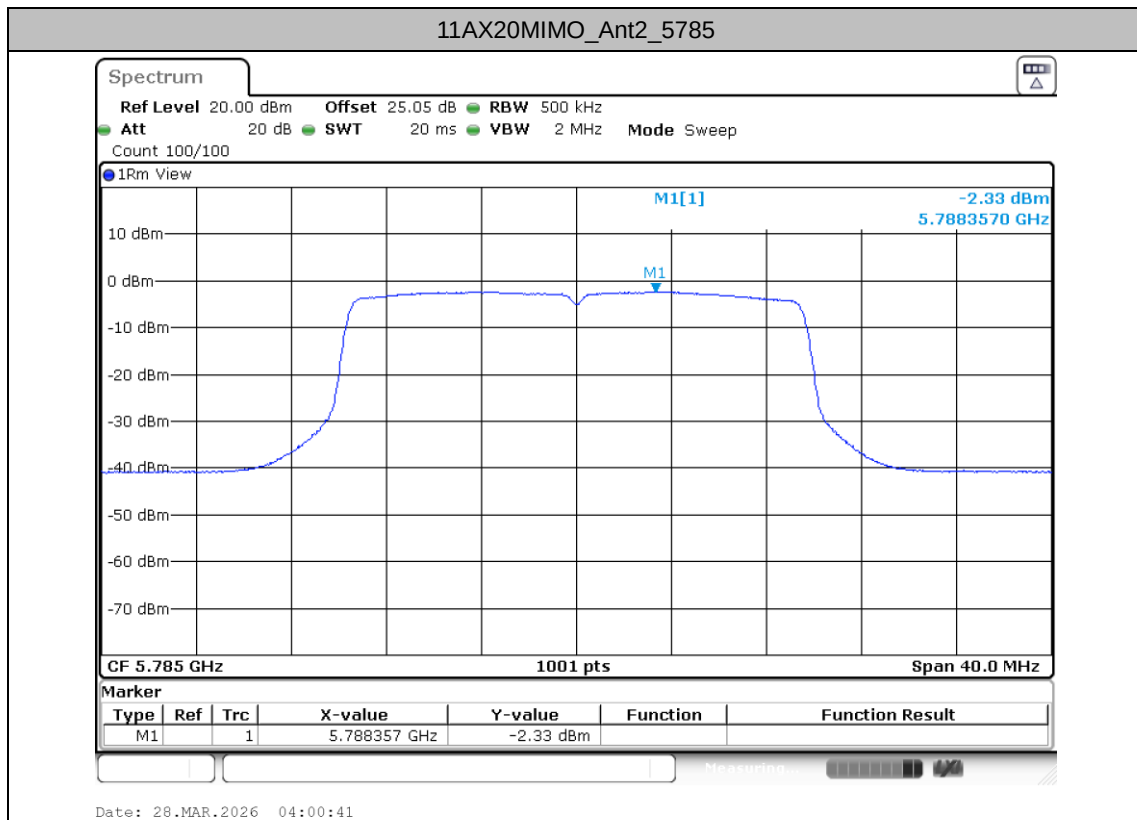



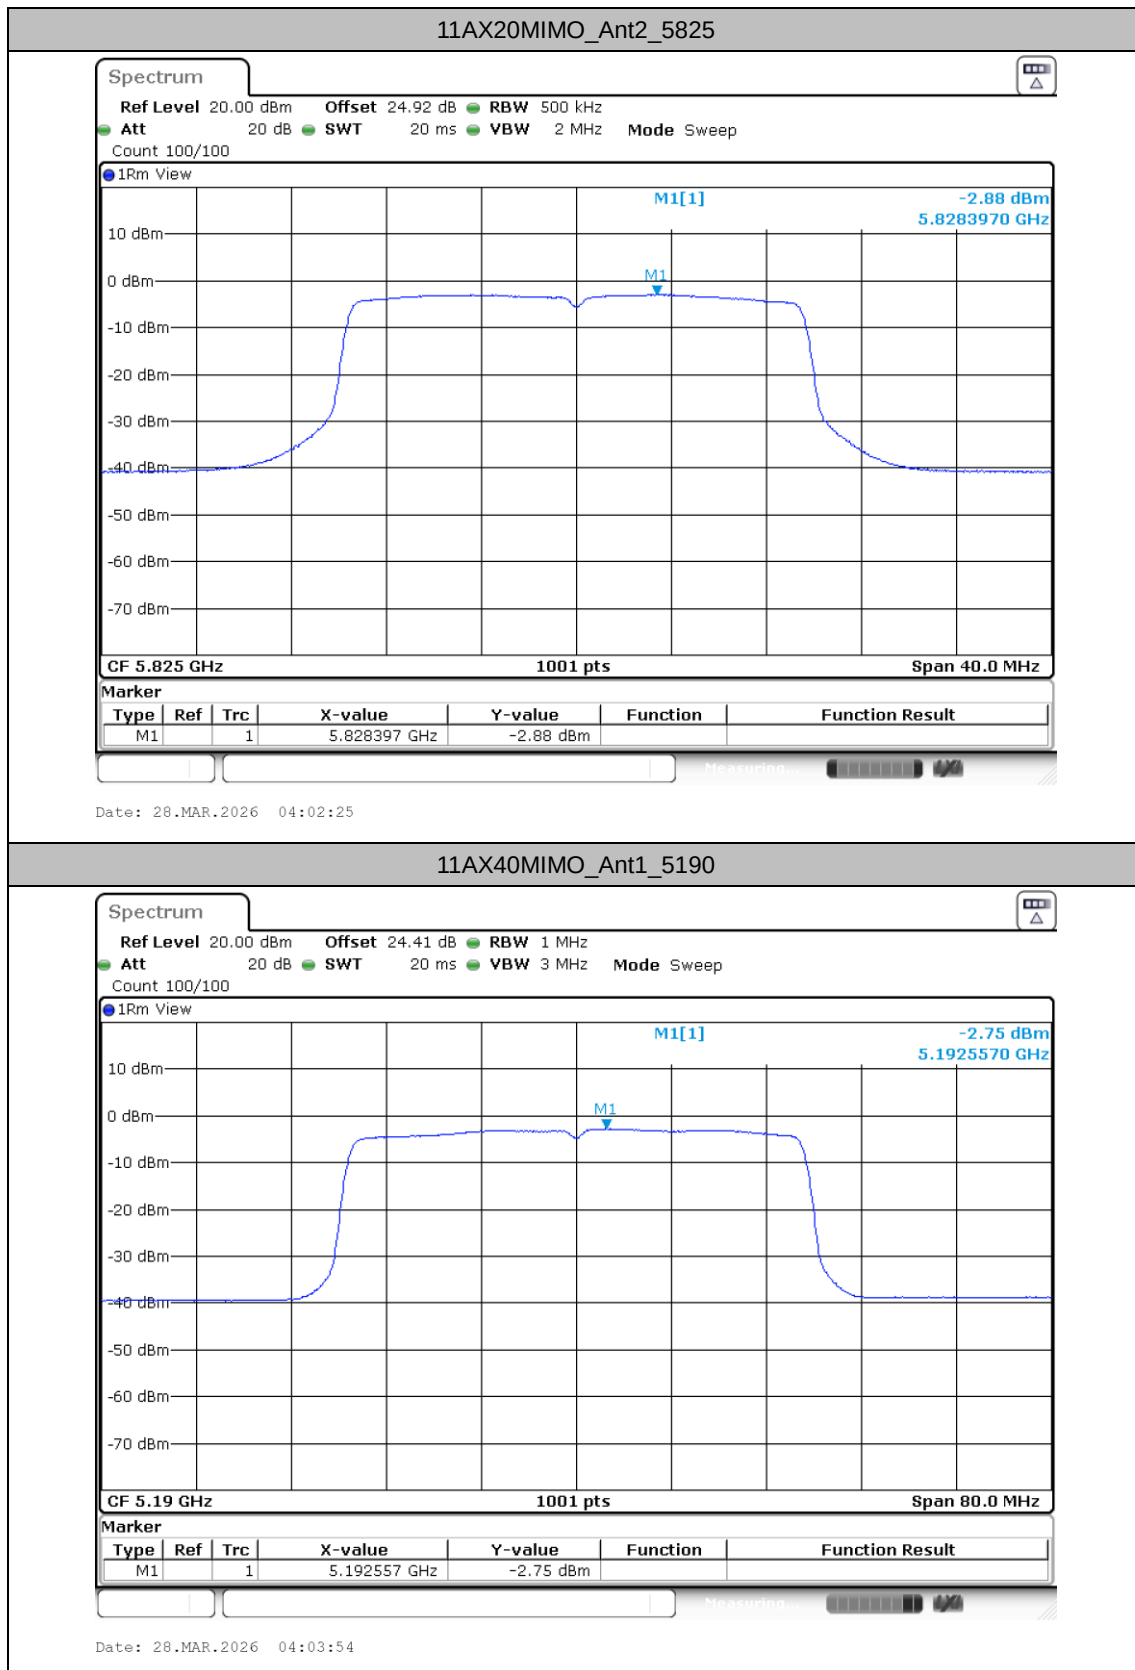


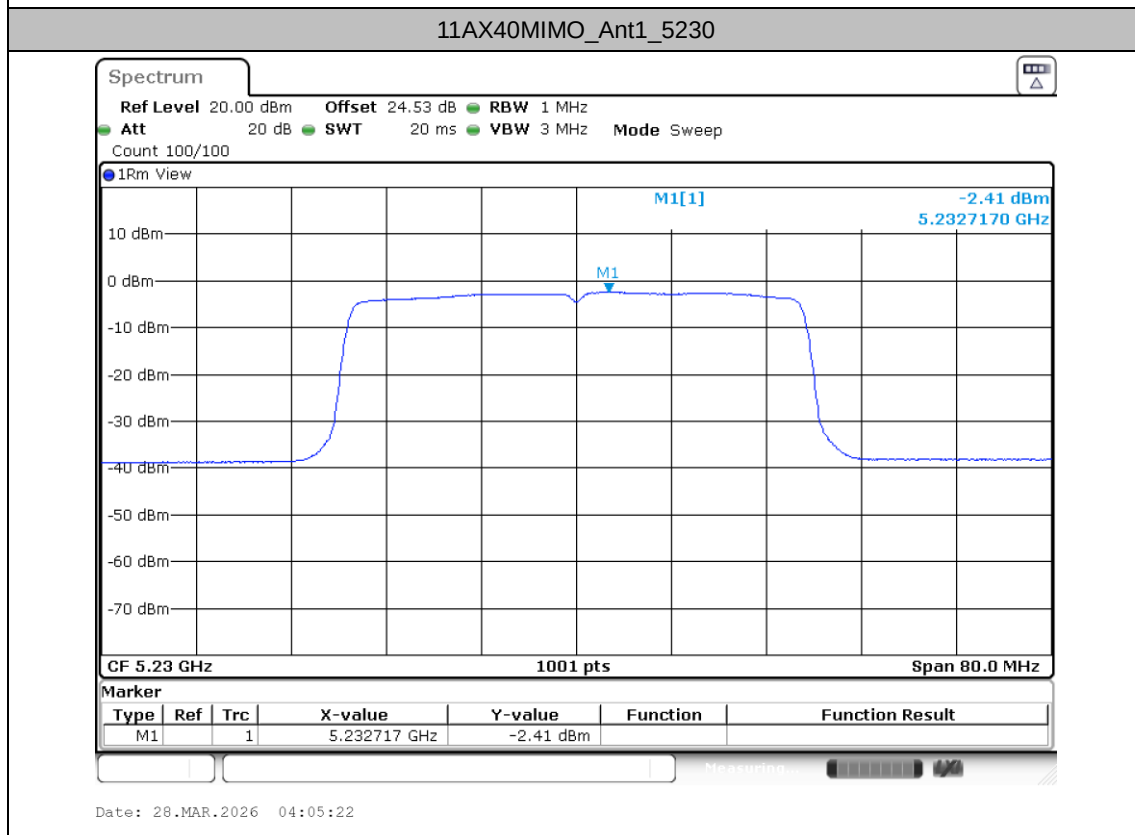
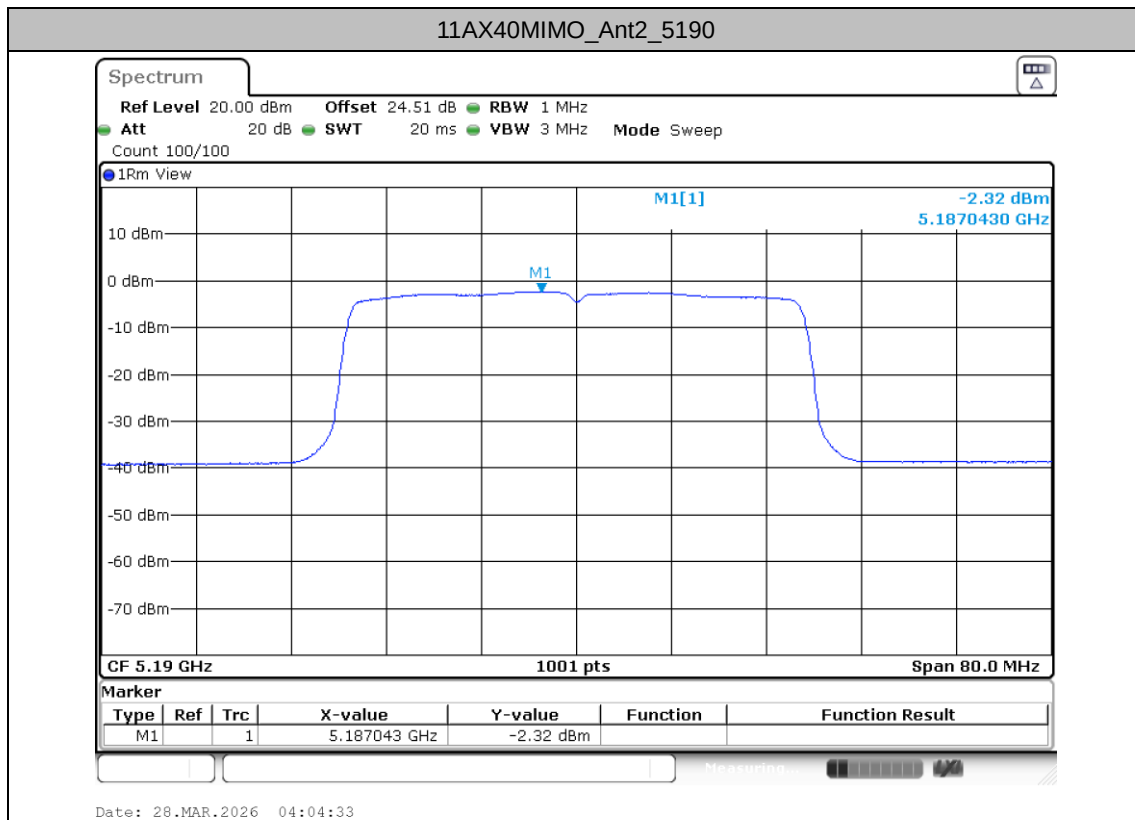


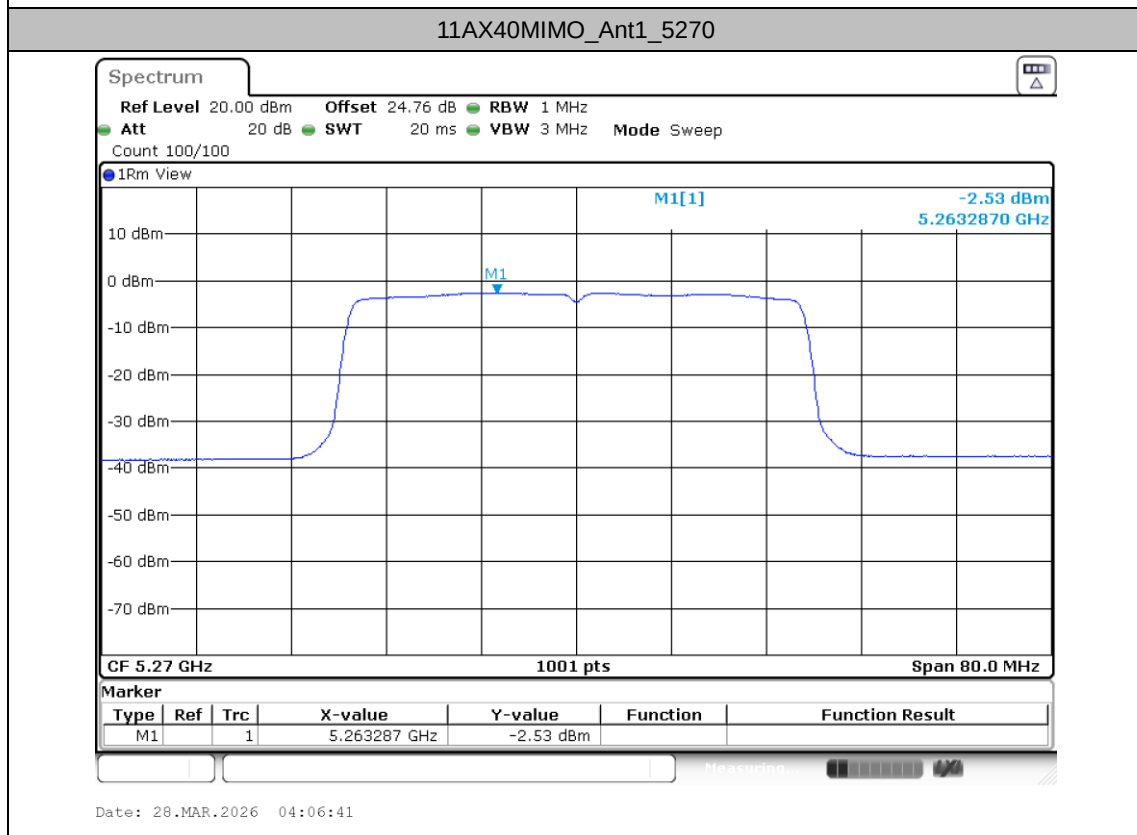
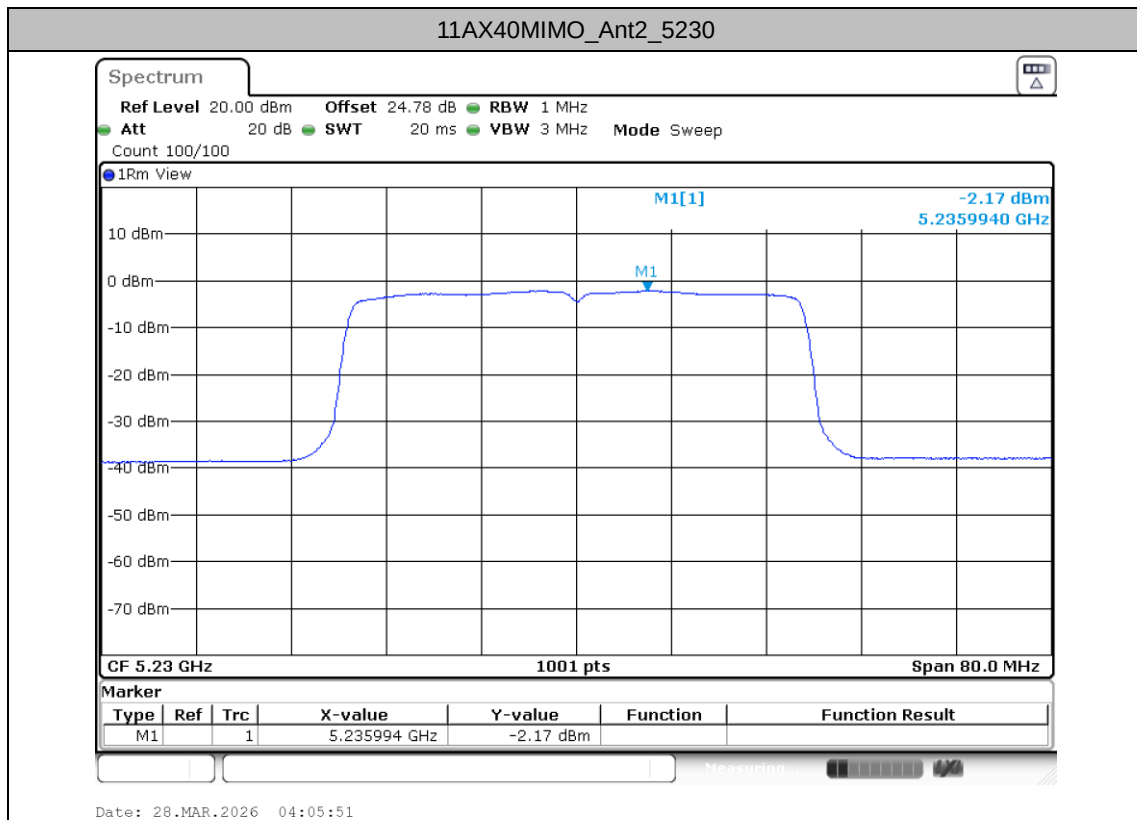


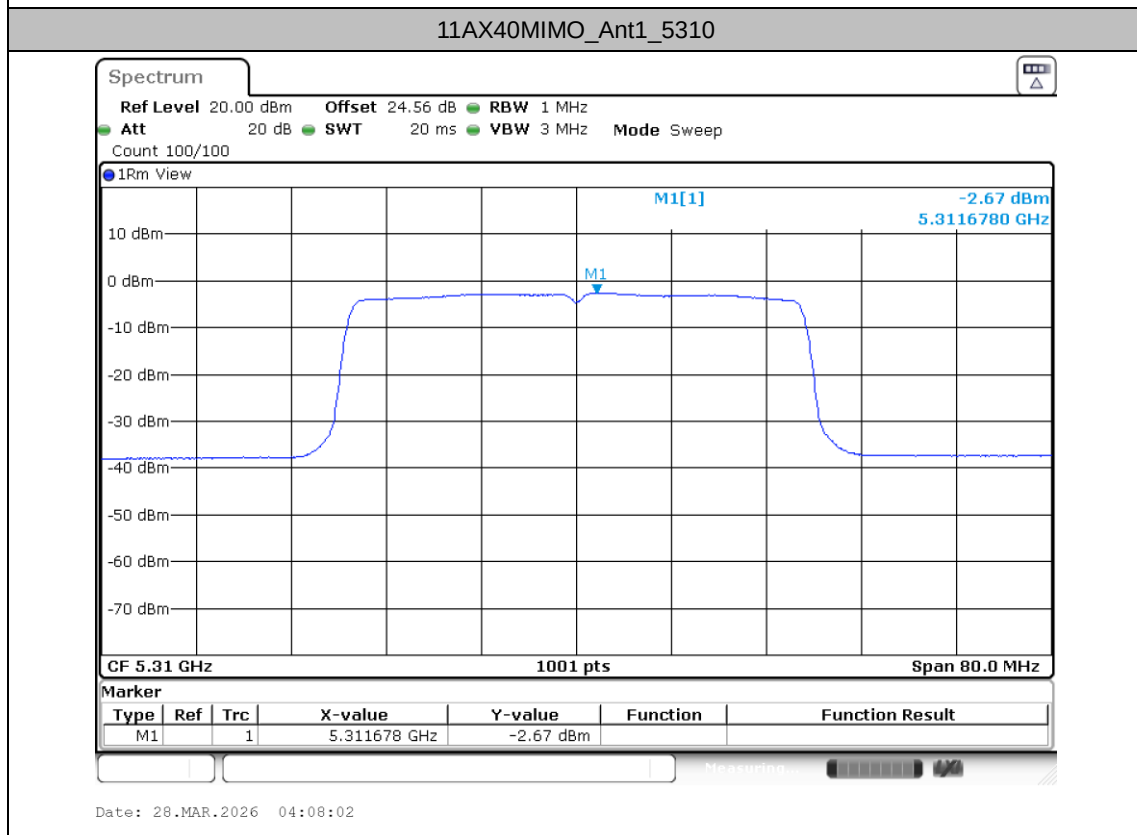
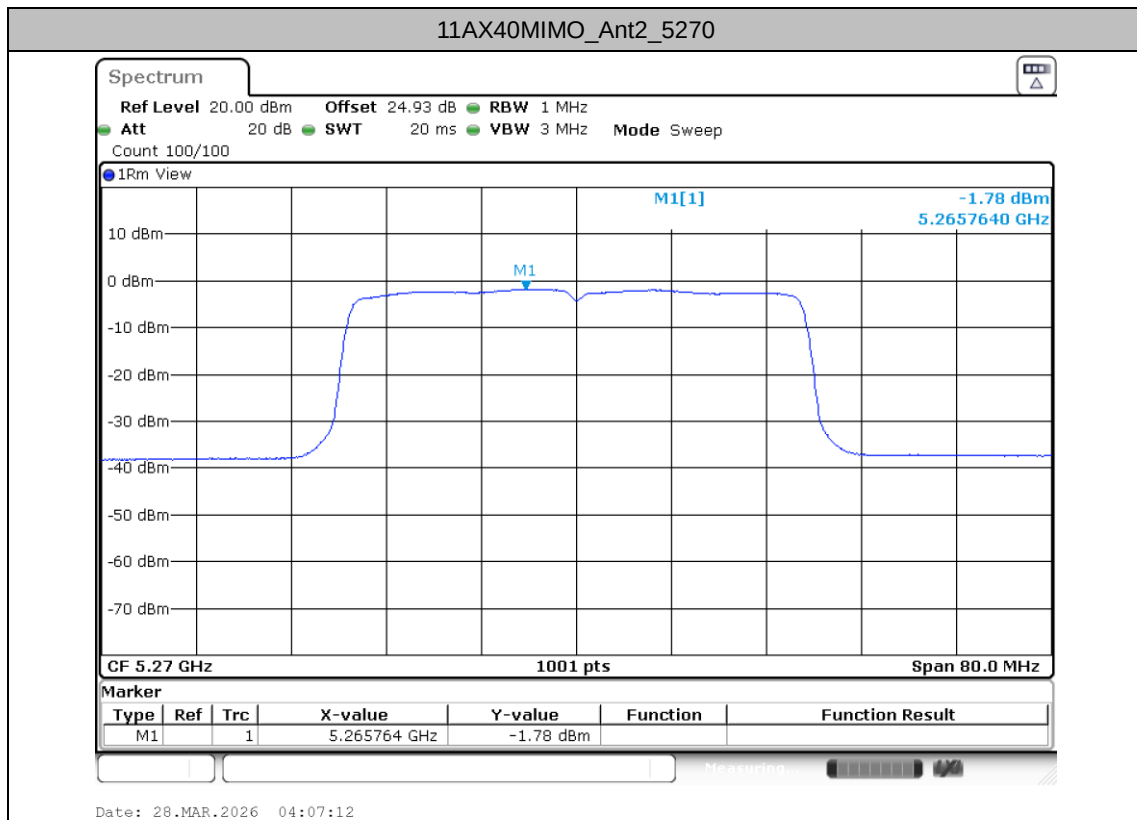


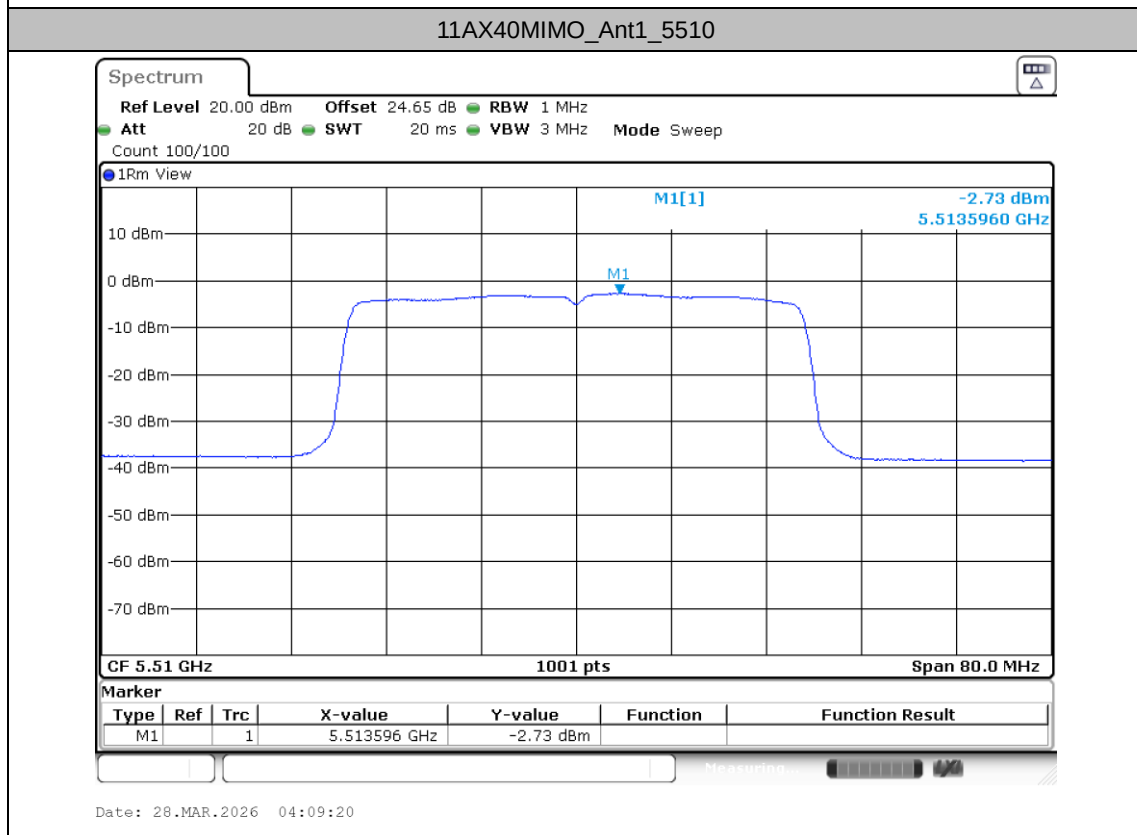
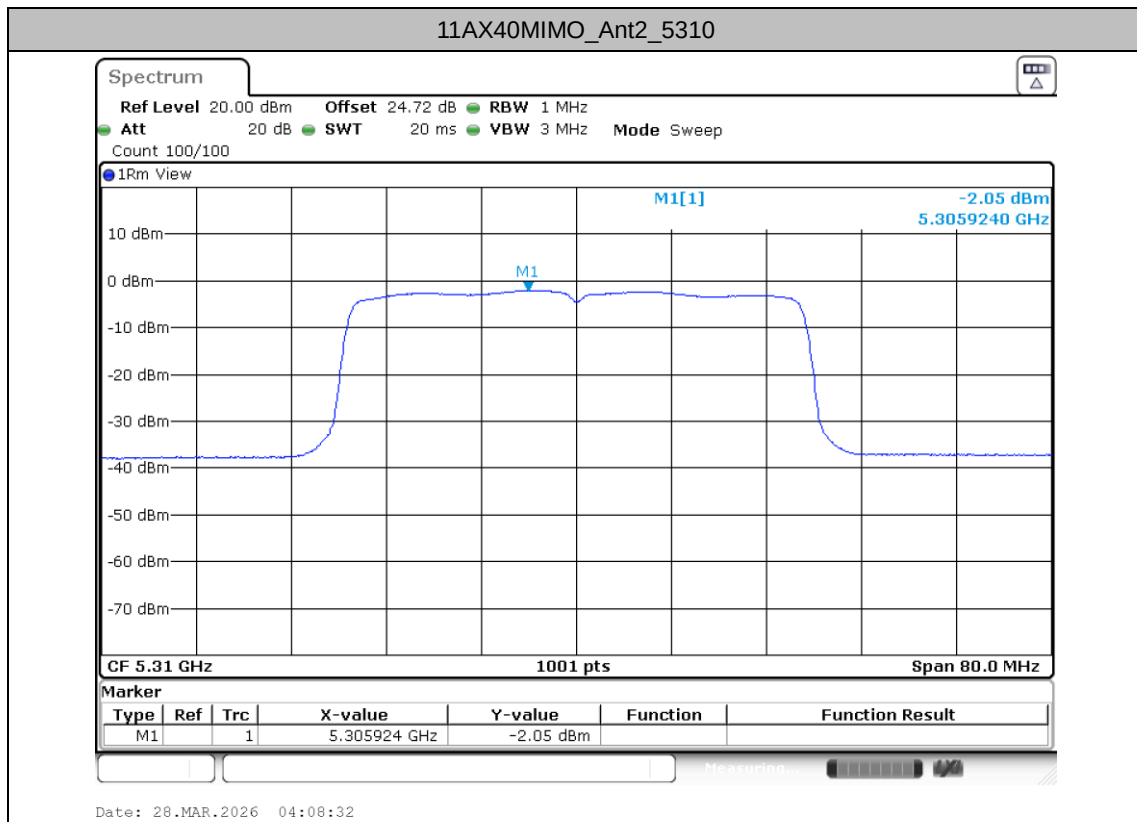


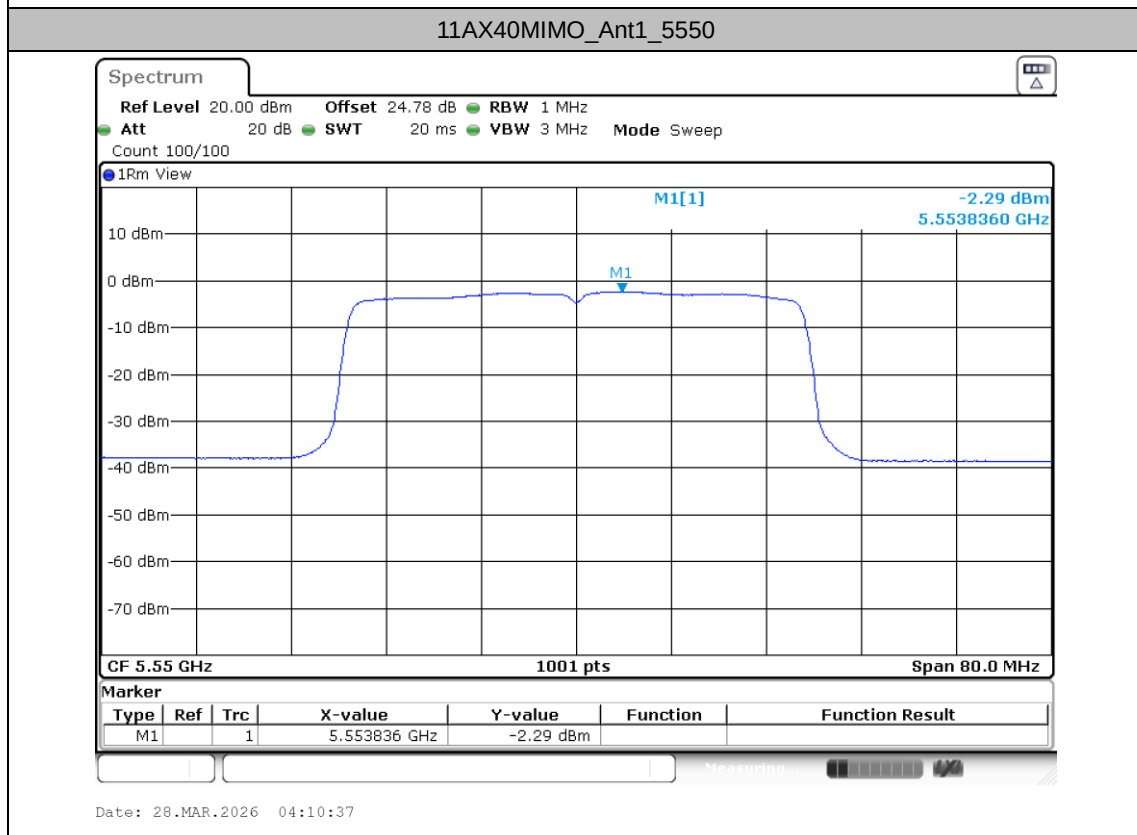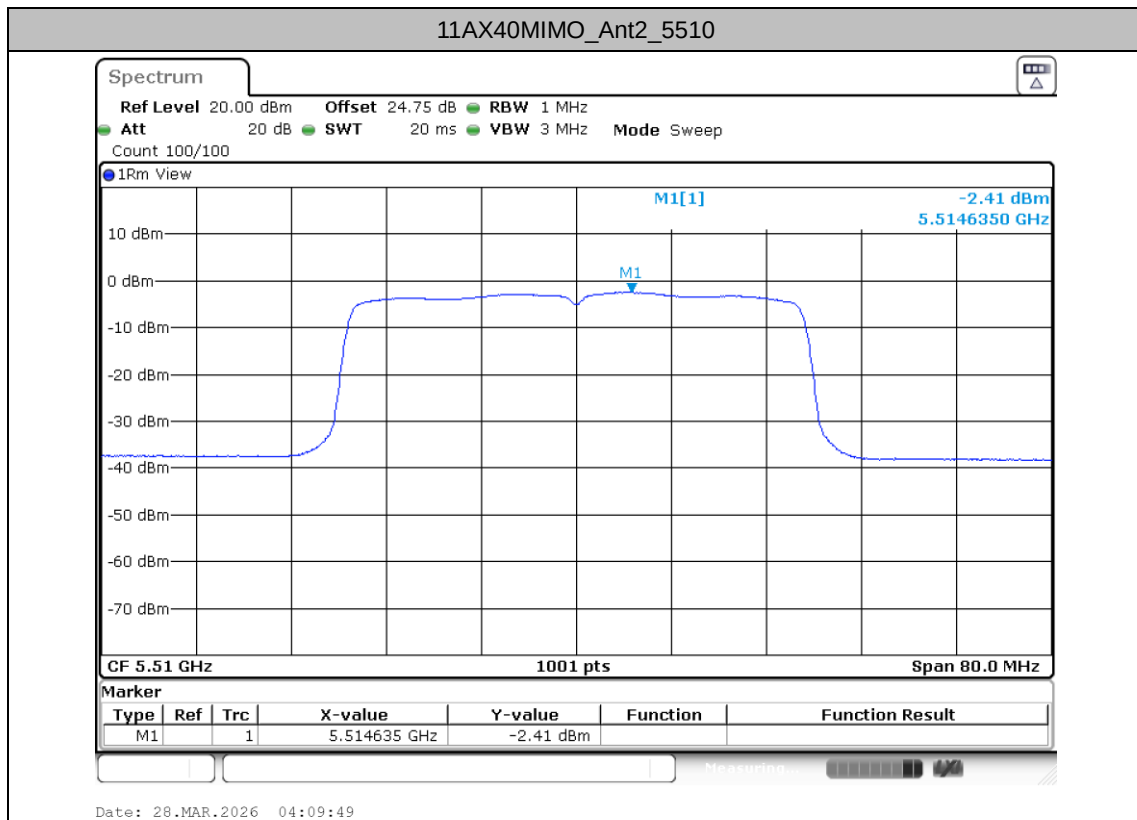


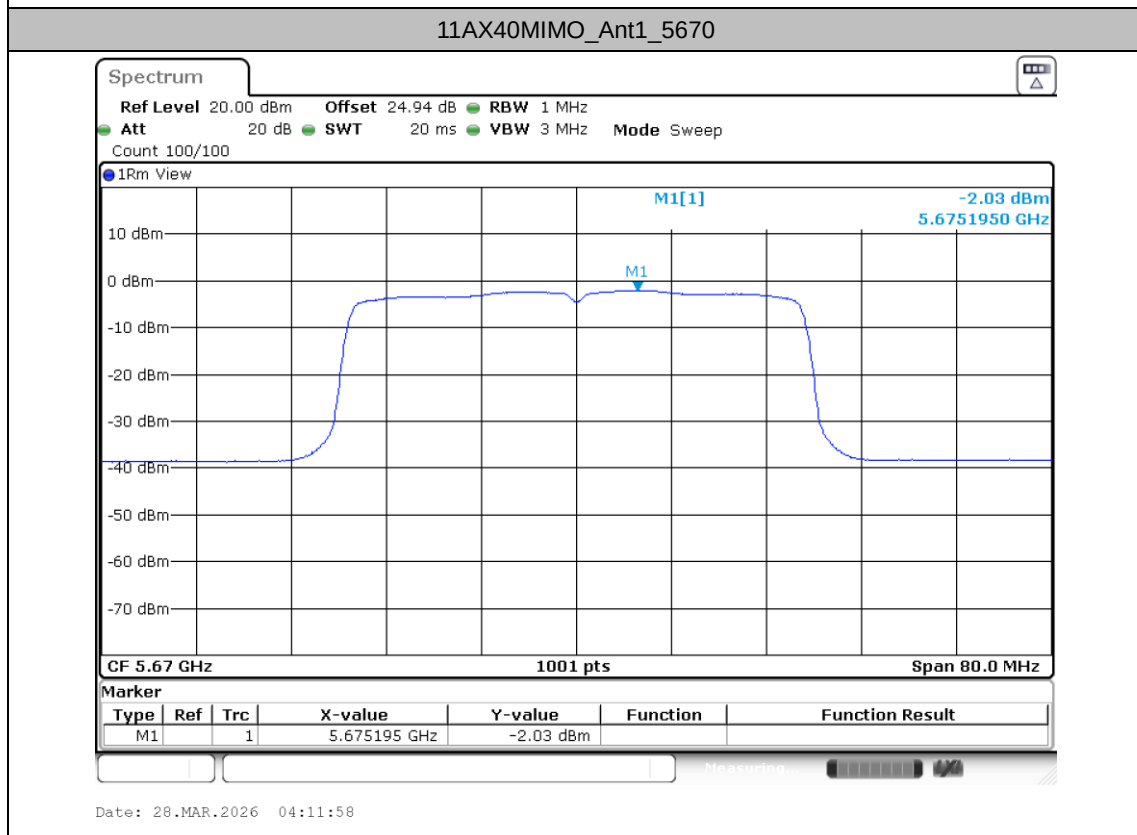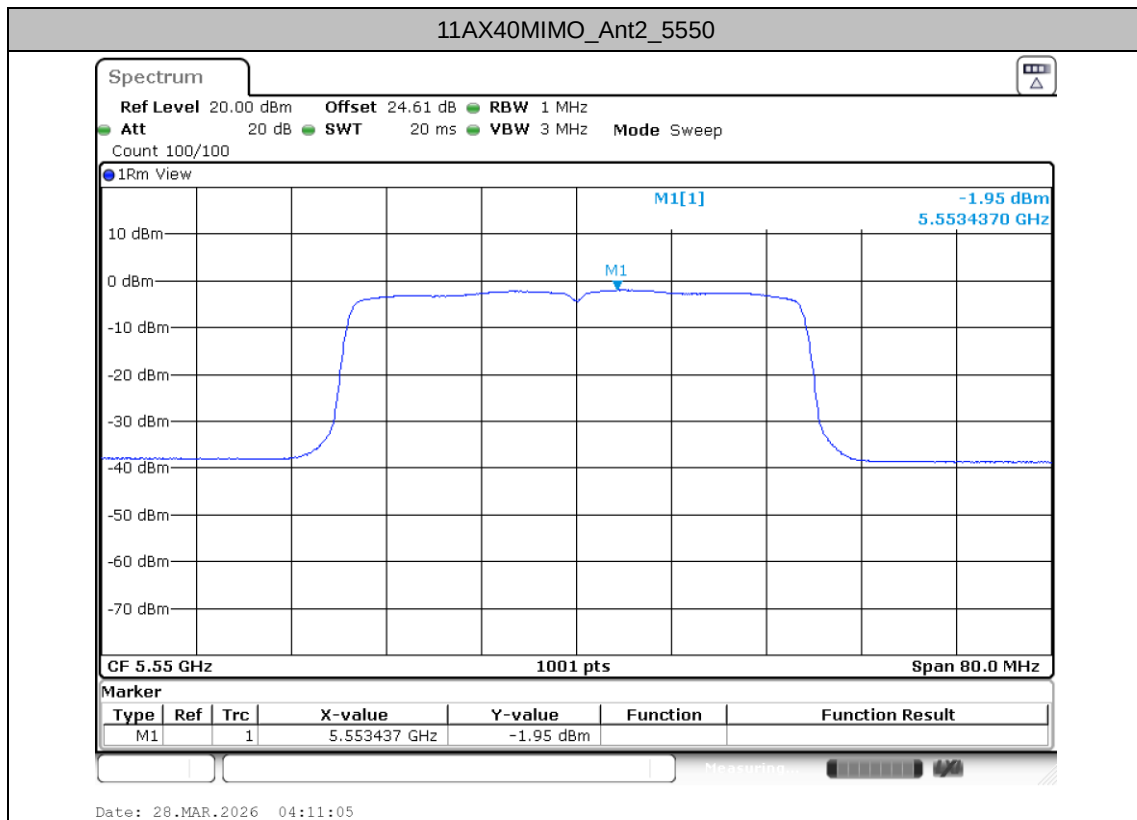


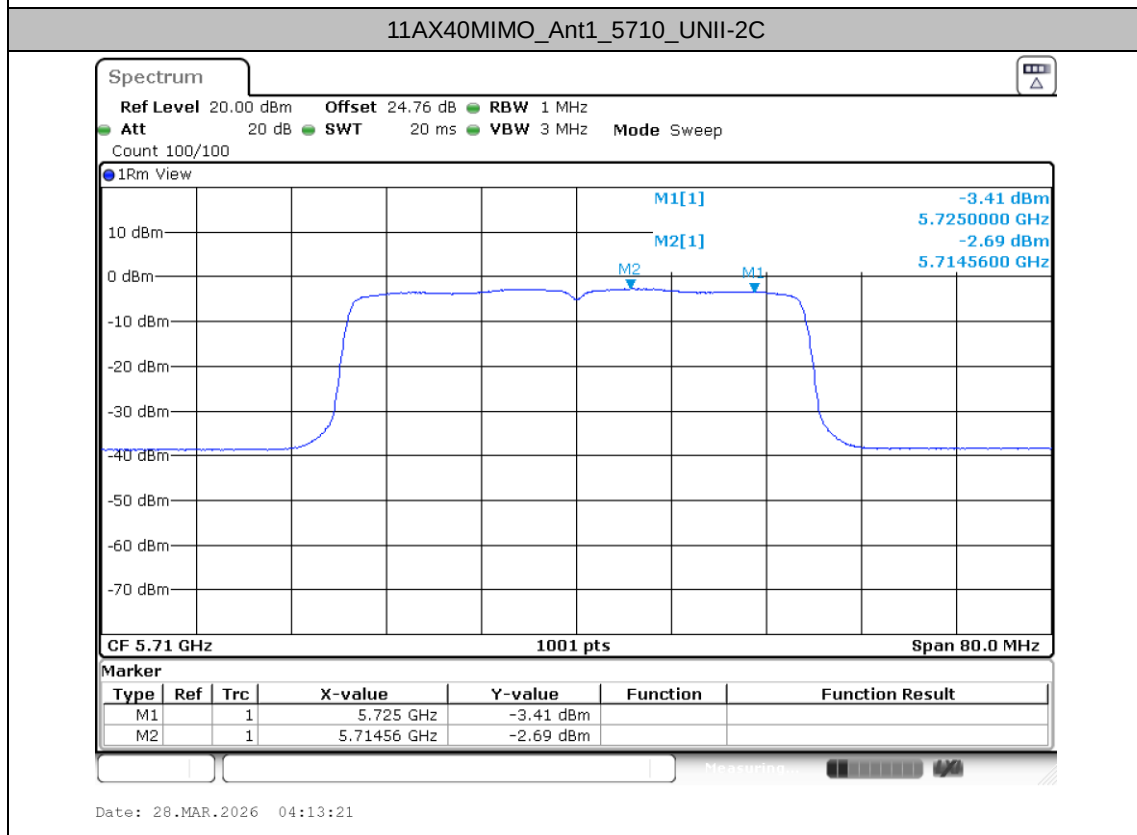
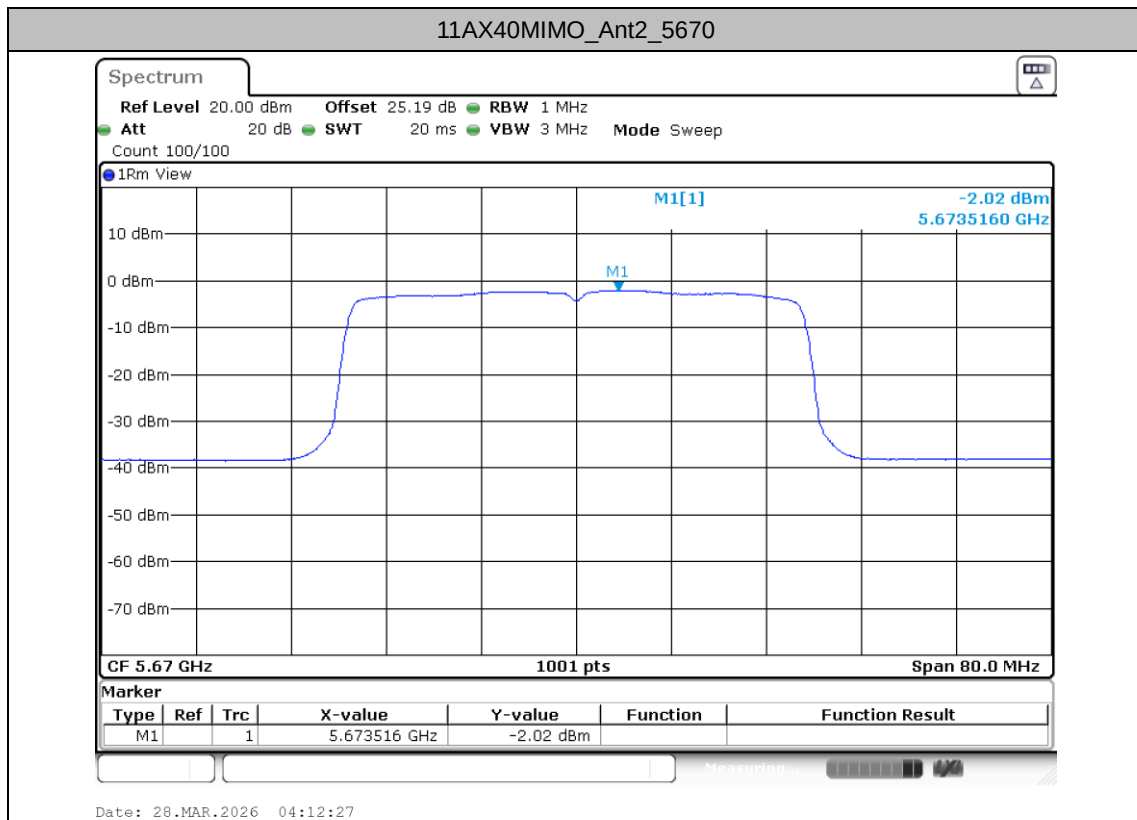


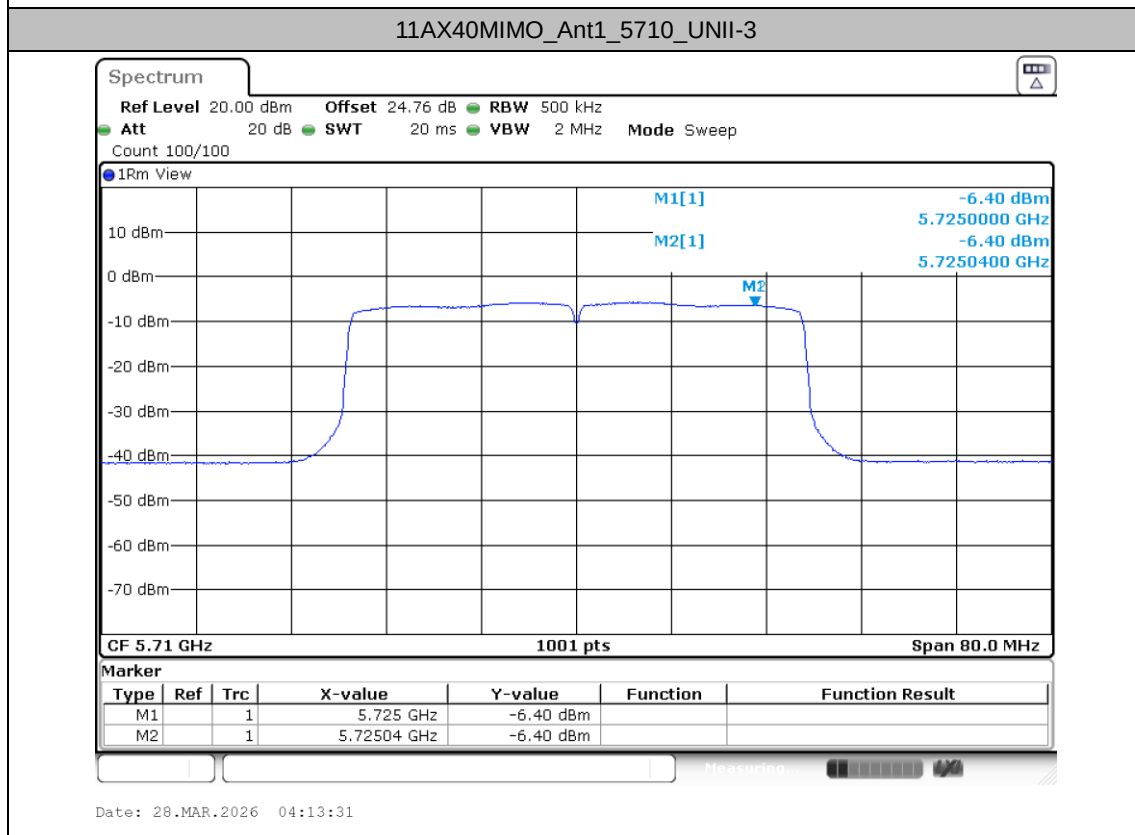
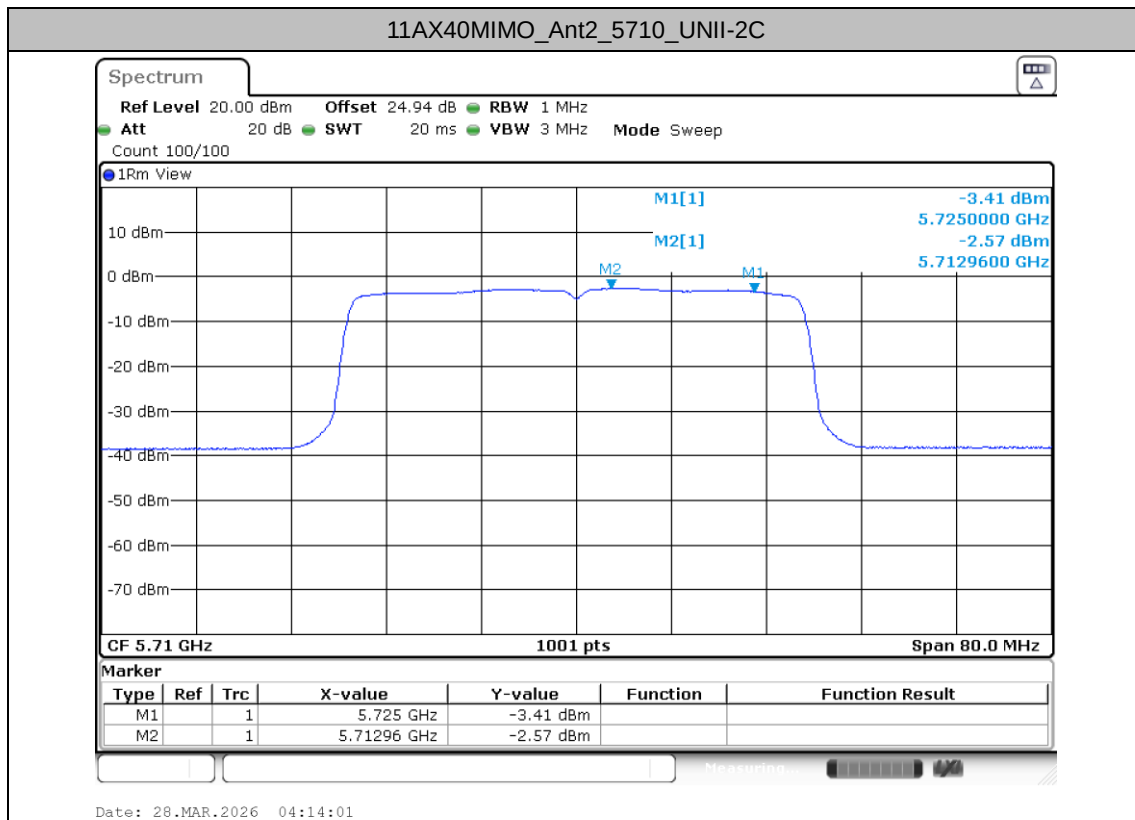


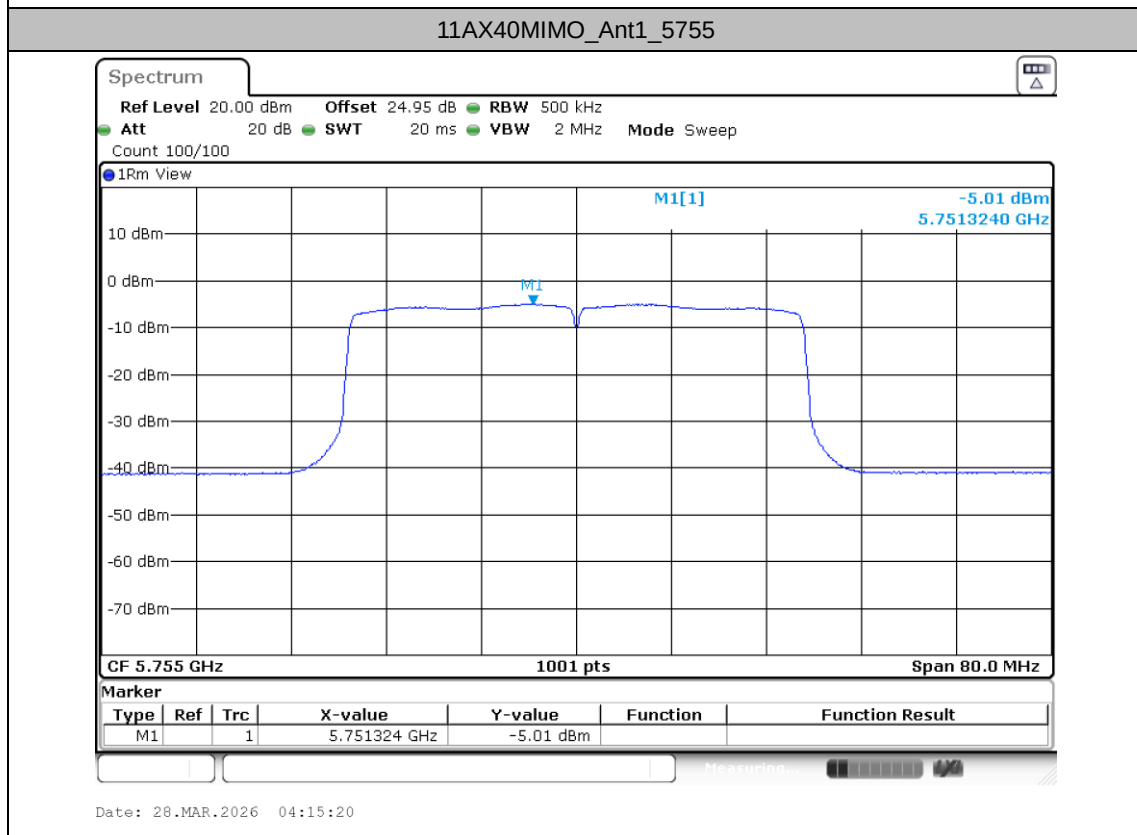
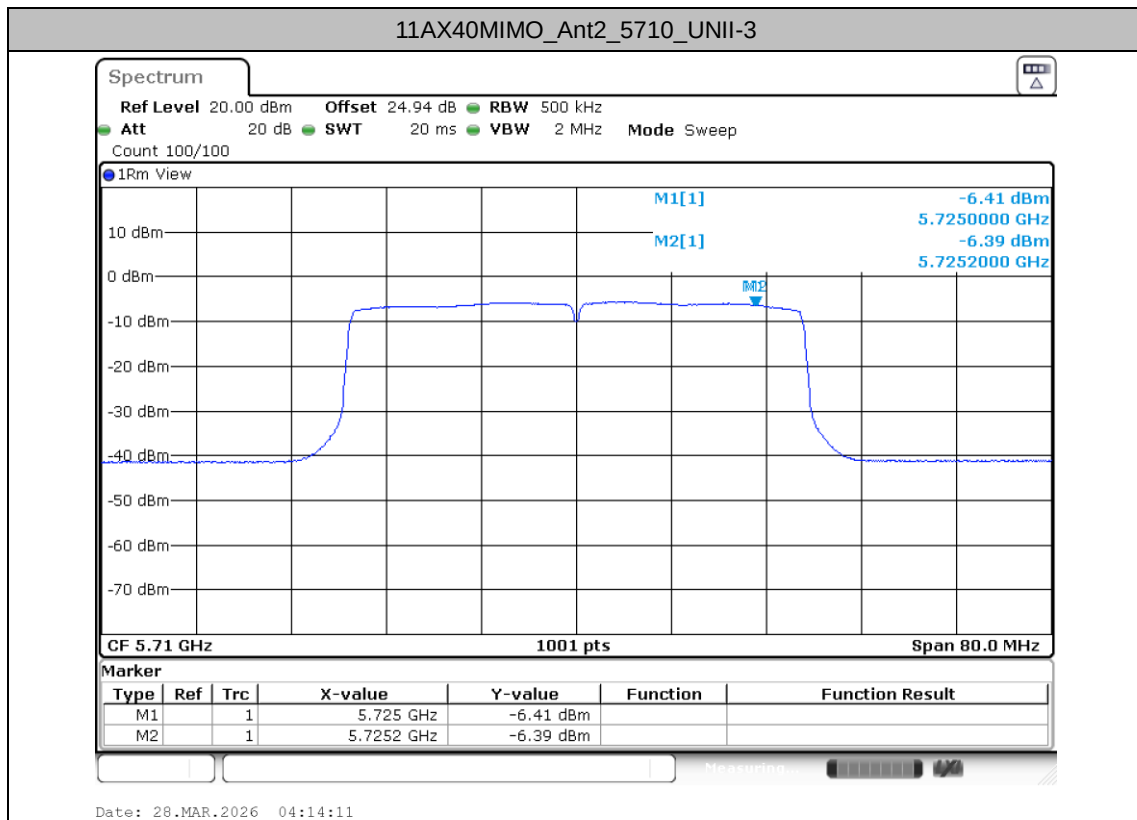


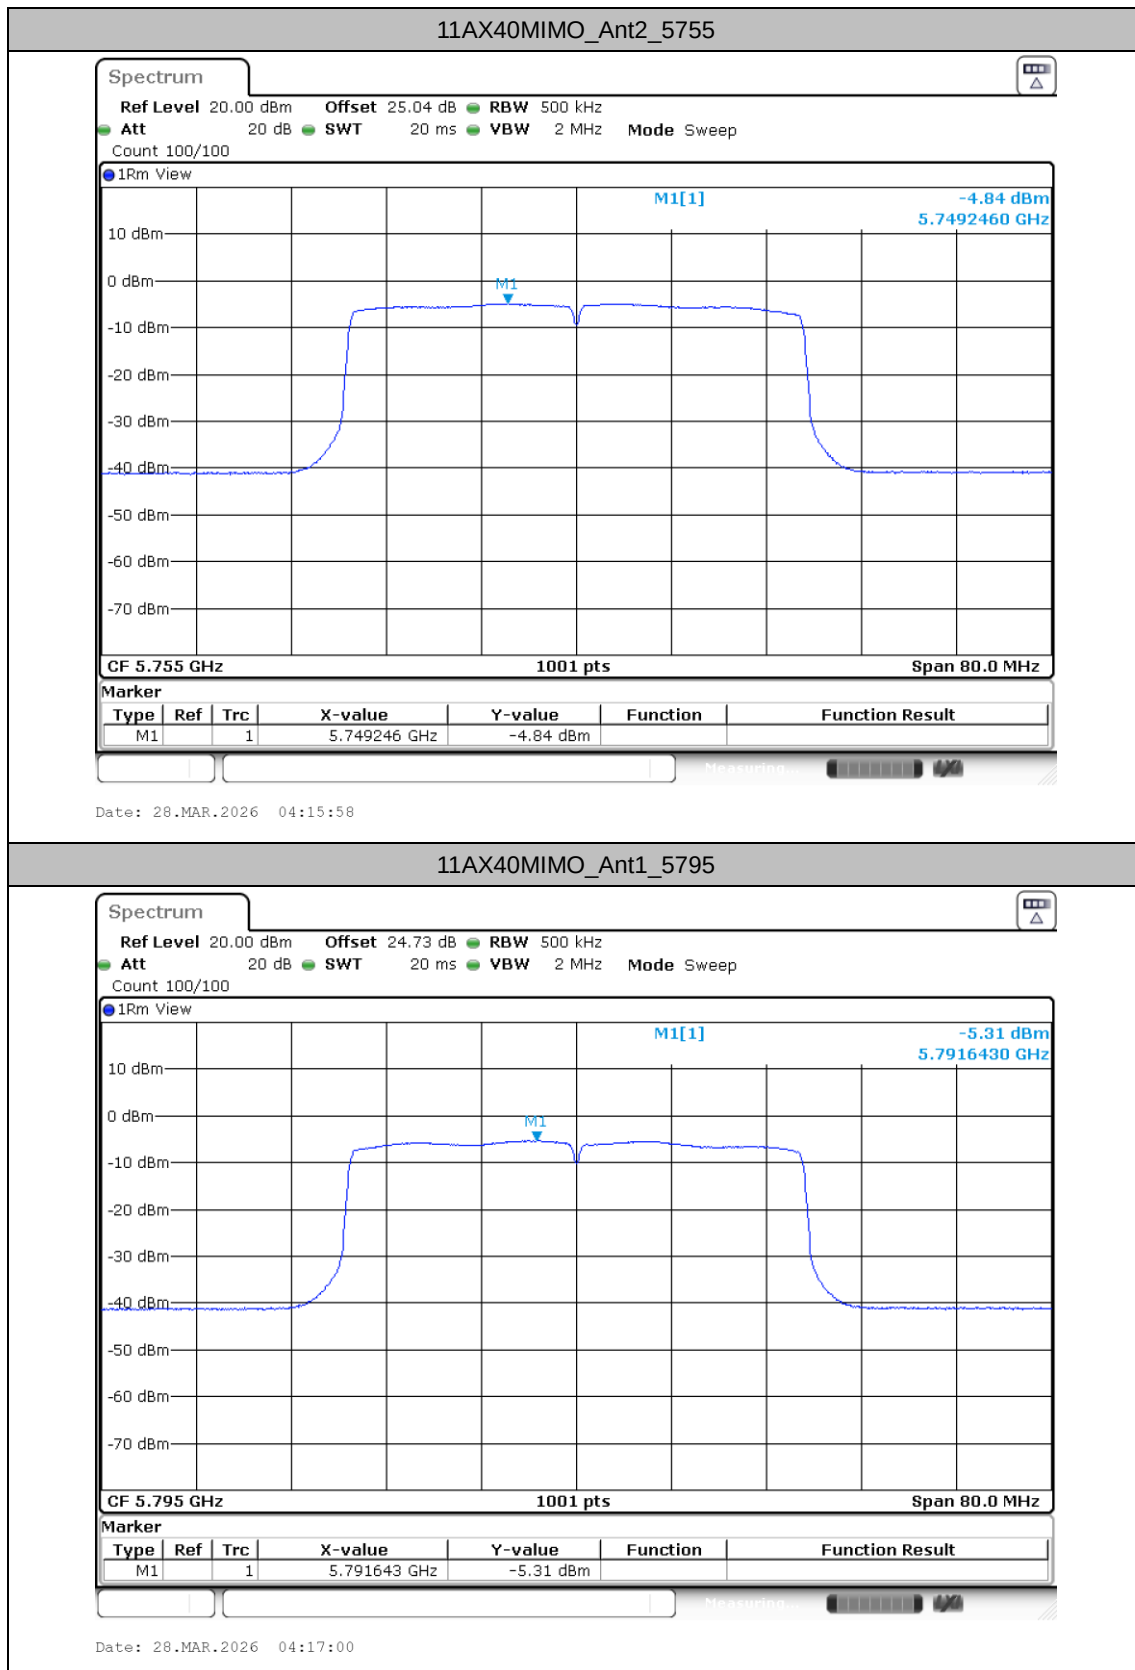


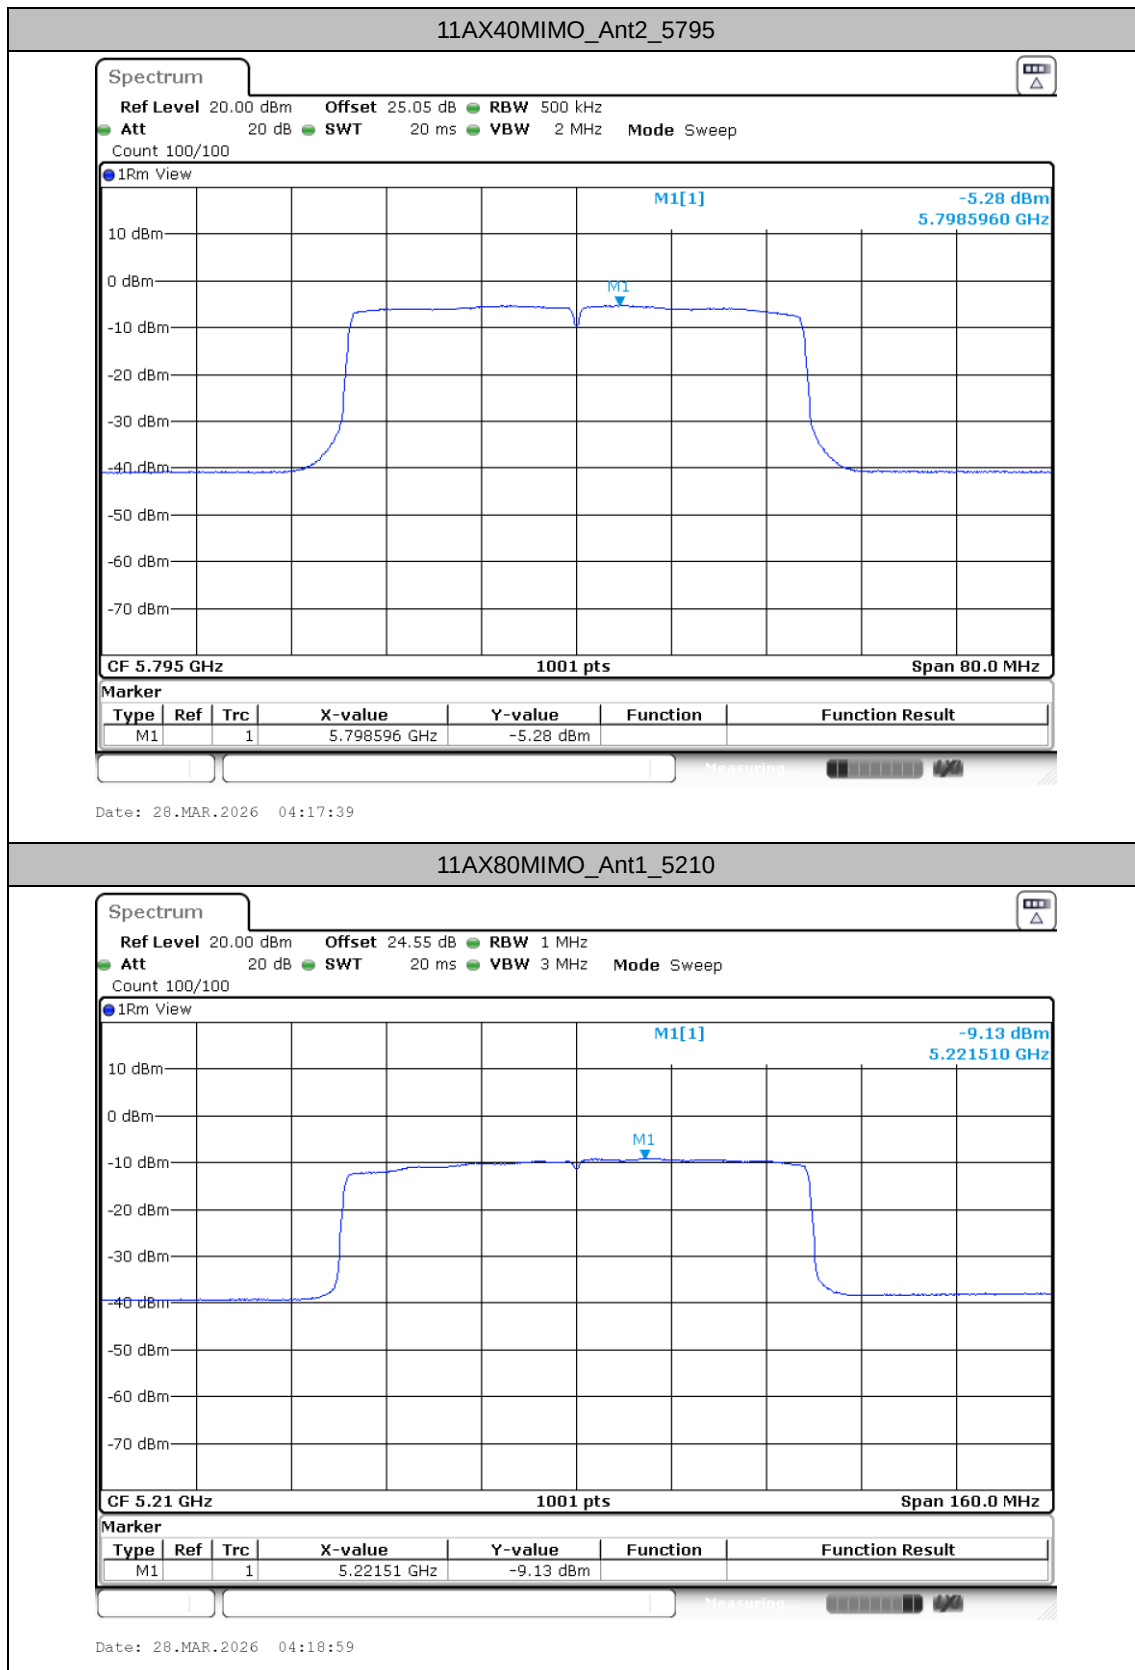


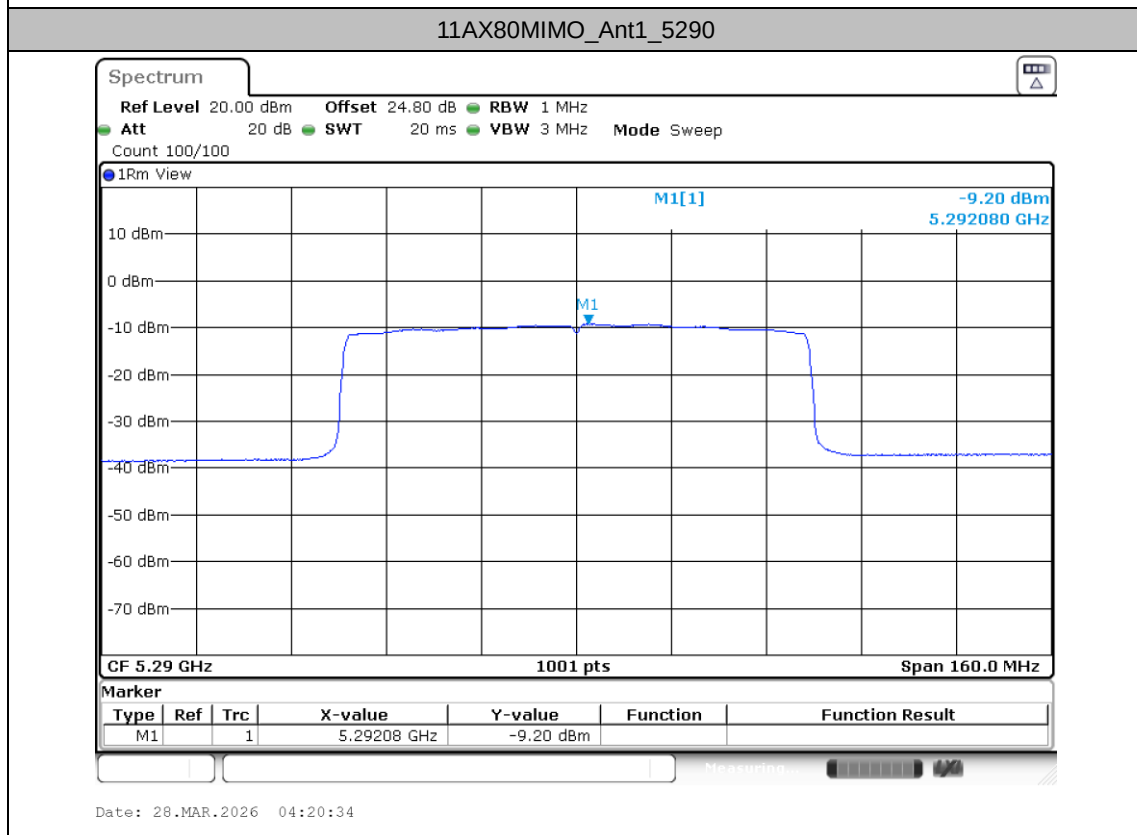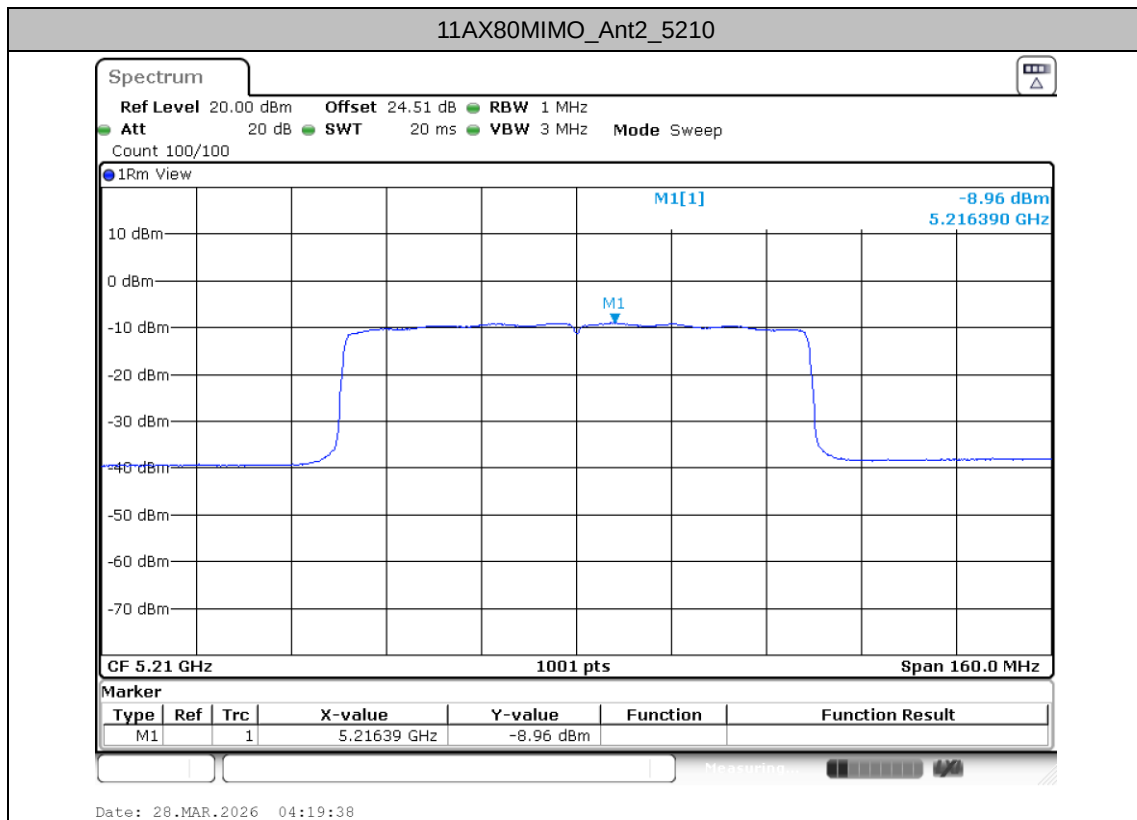


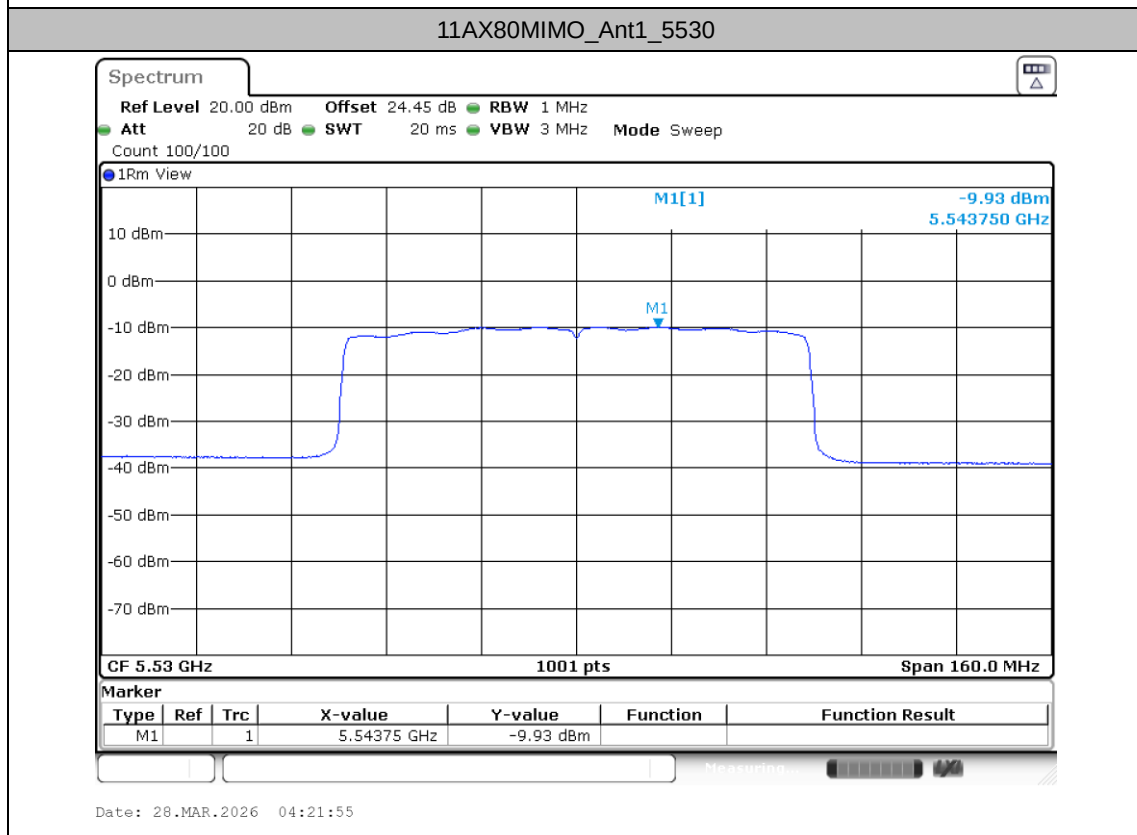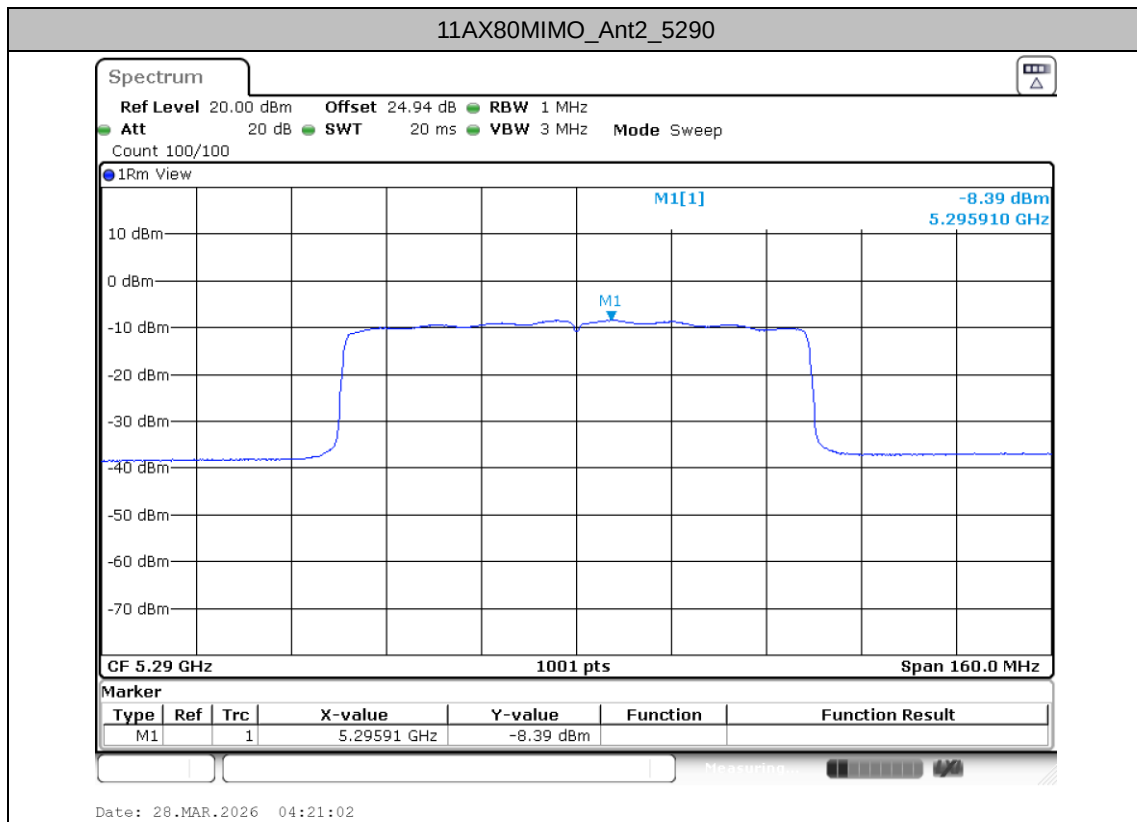


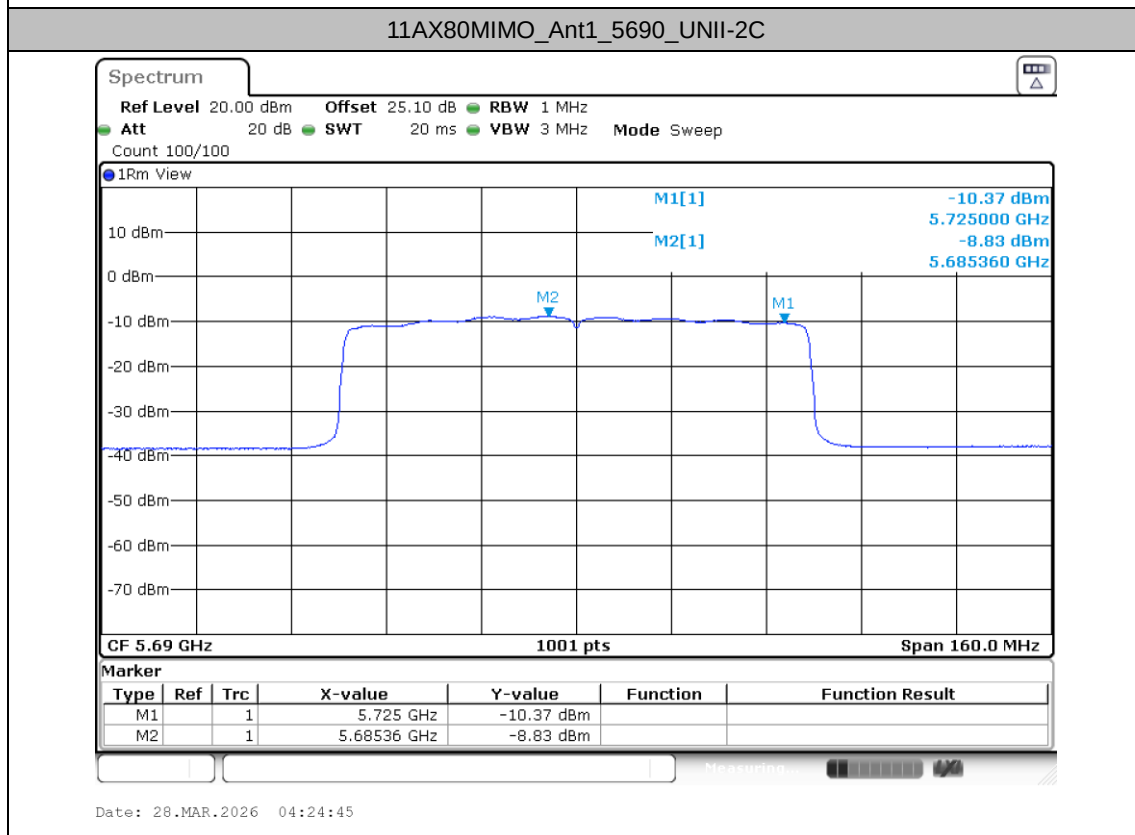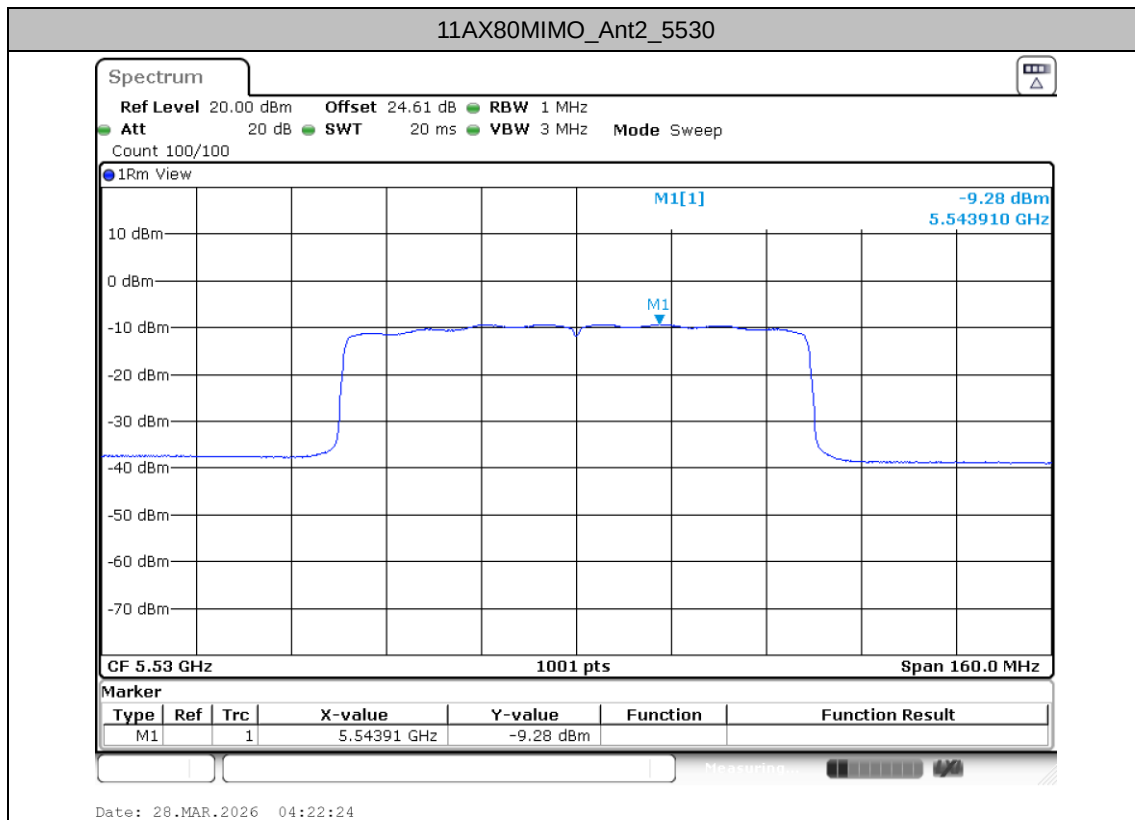


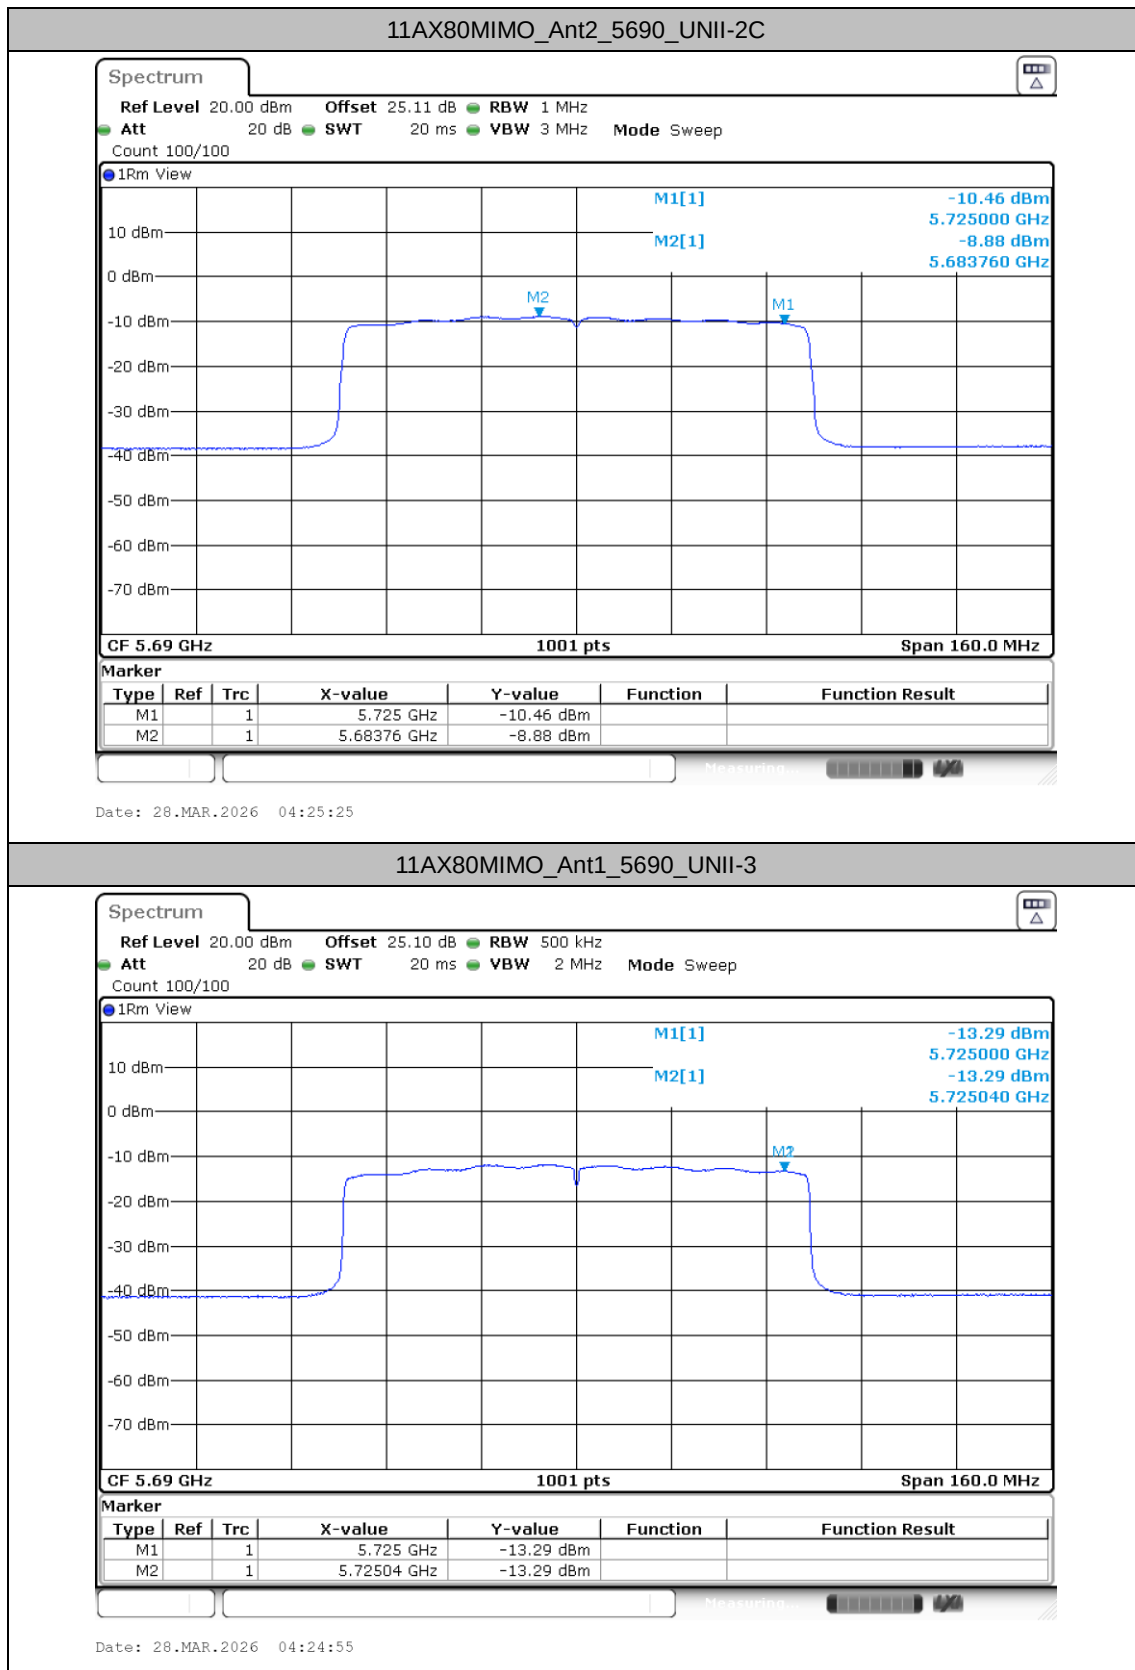

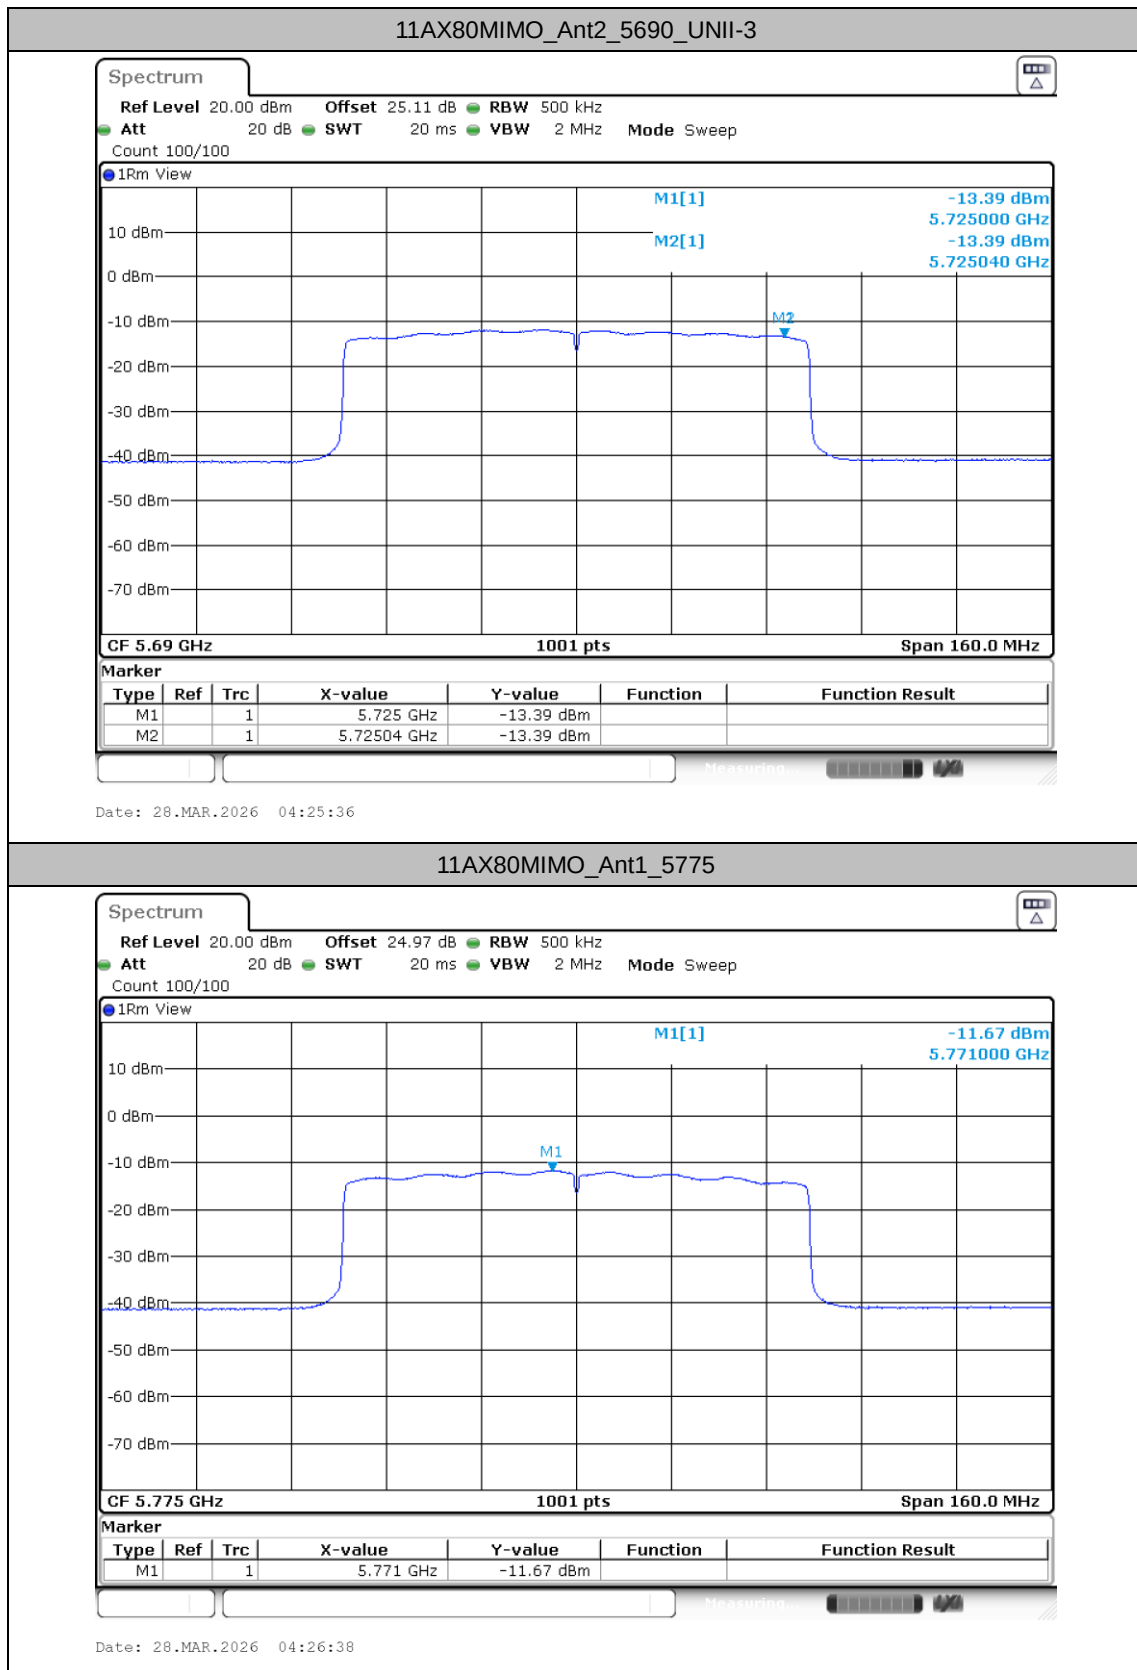

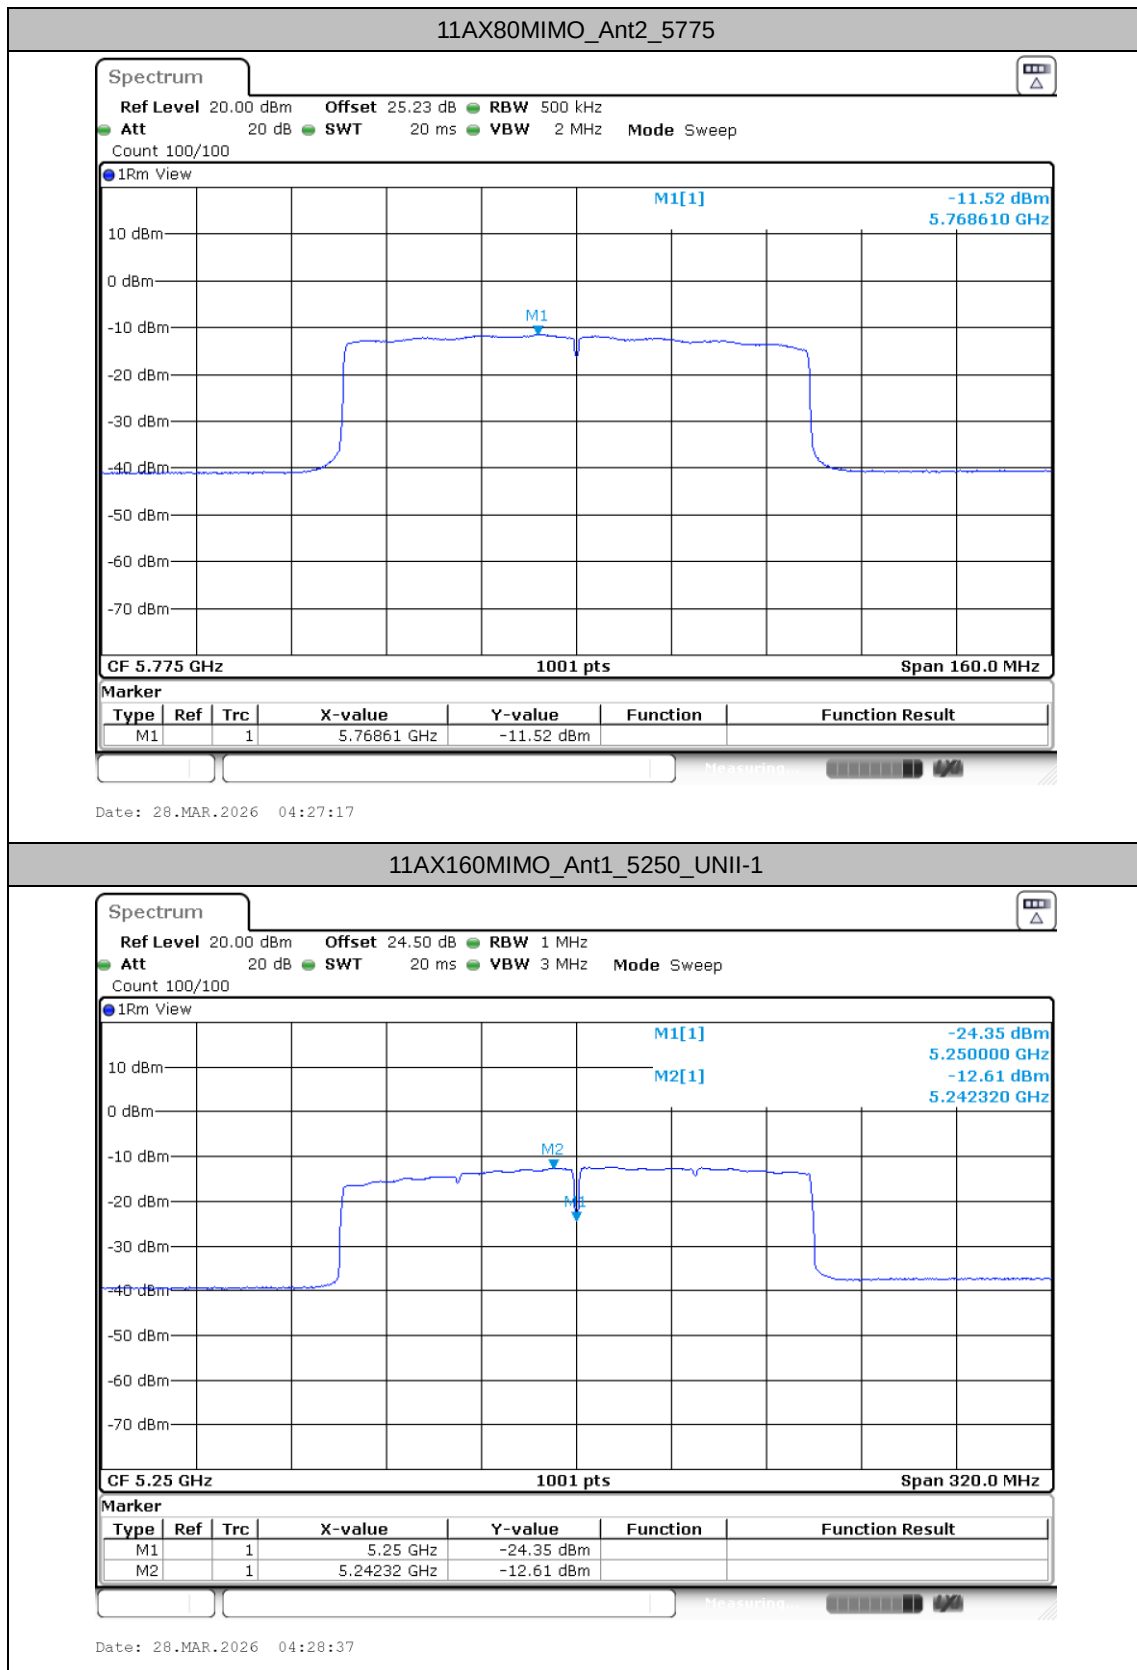

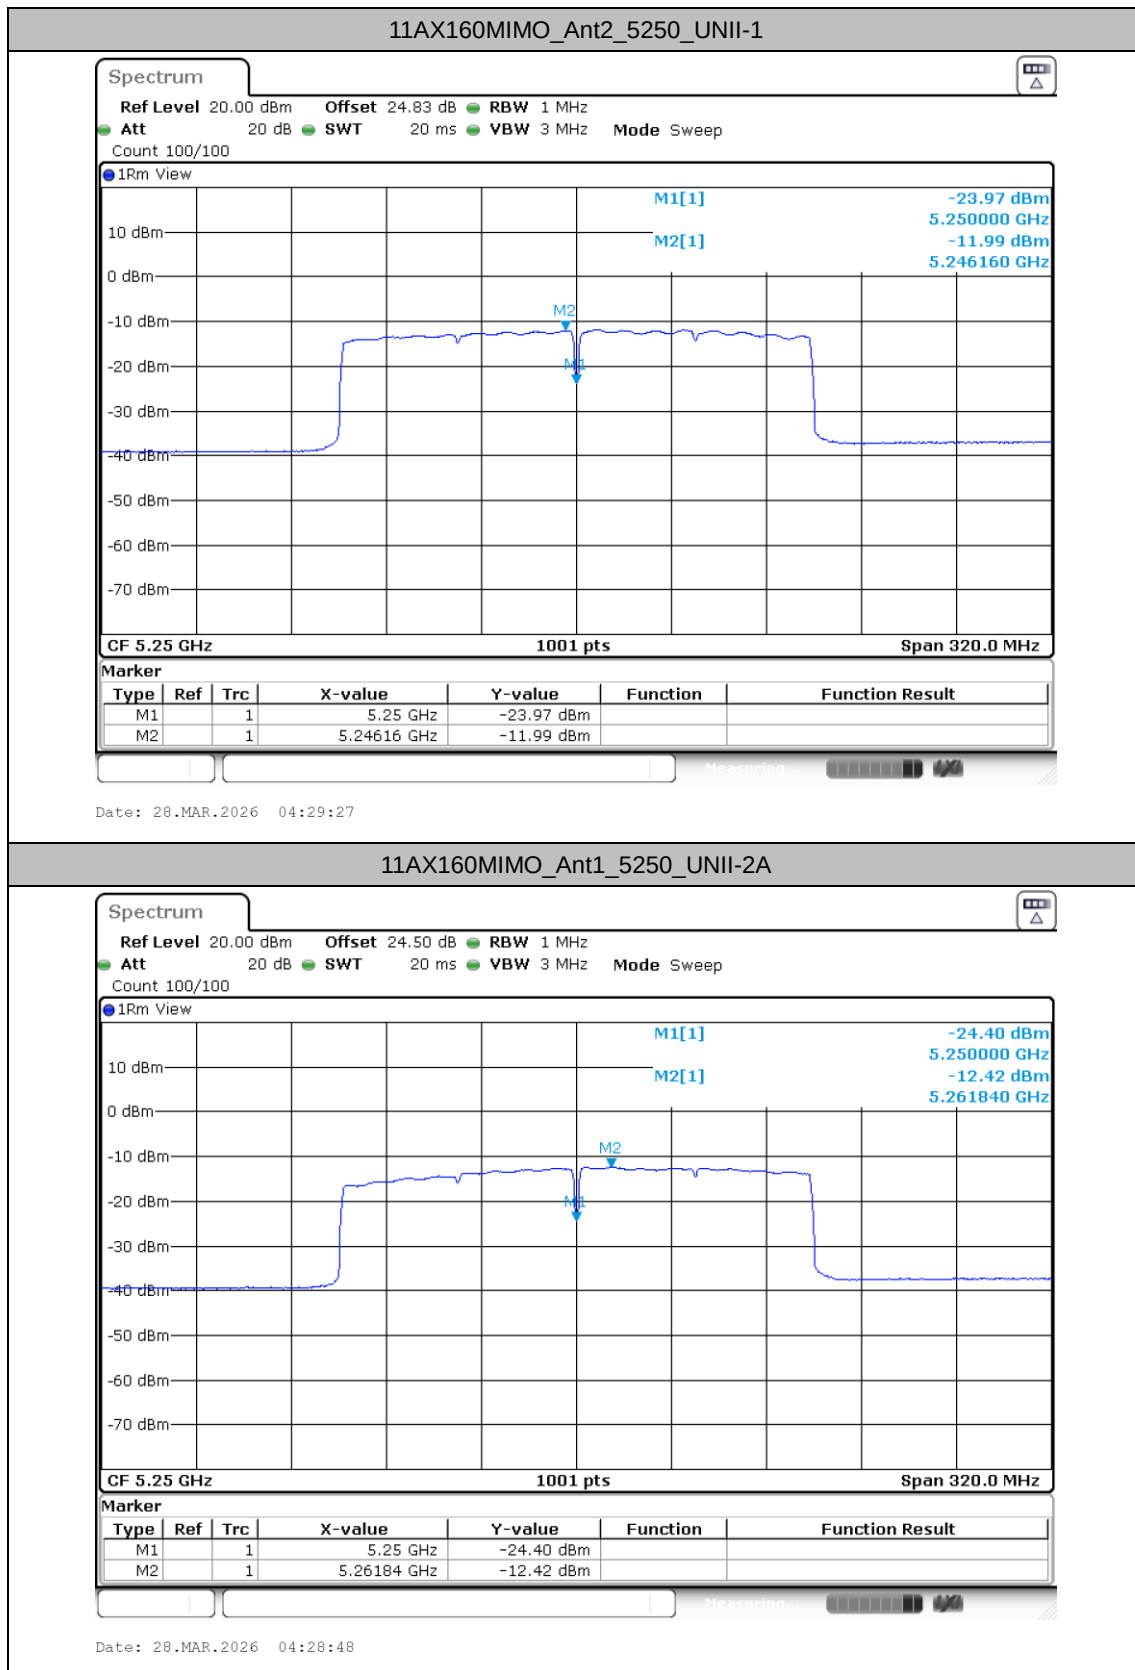

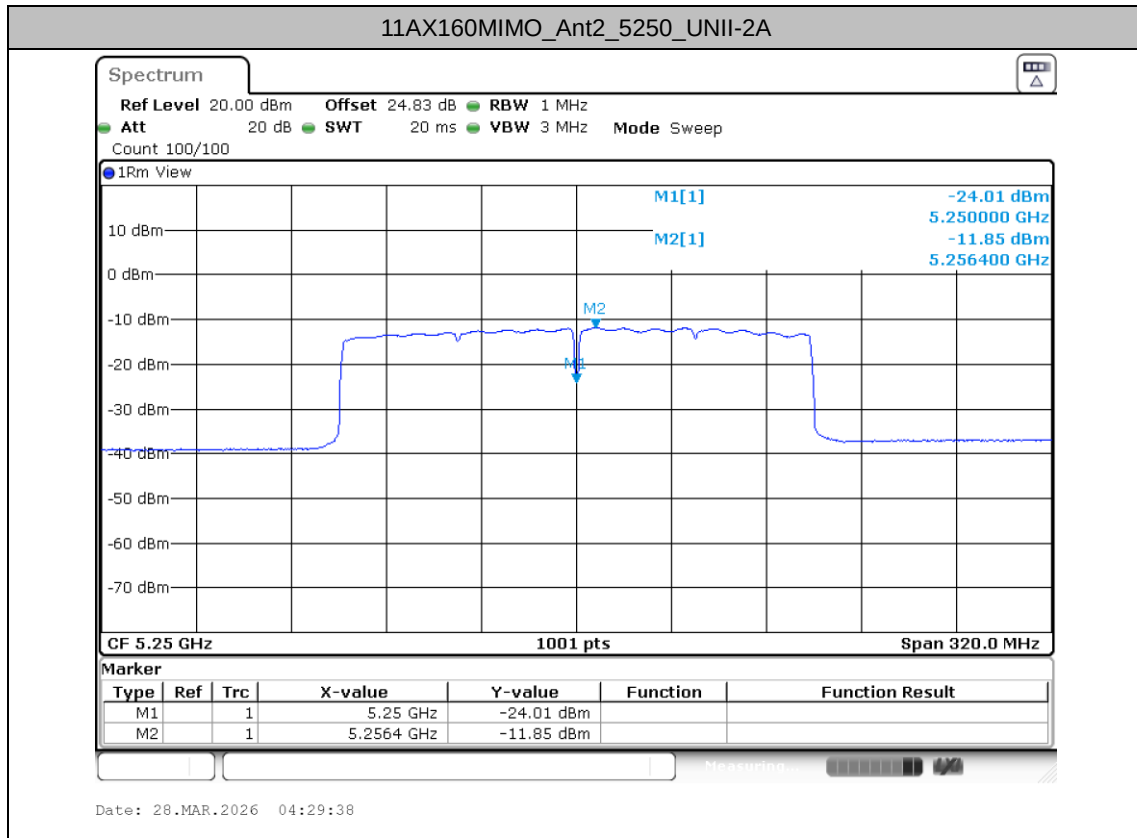



Partial RU:

Maximum power spectral density

Test Result

Test Mode	Antenna	Freq(MHz)	Ru Size	Ru Index	Result [dBm/MHz]	Limit [dBm/MHz]	Verdict
11AX20MIMO	Ant1	5180	26Tone	RU0	0.52	≤11.00	PASS
			52Tone	RU37	0.32	≤11.00	PASS
			106Tone	RU53	-0.08	≤11.00	PASS
	Ant2	5180	26Tone	RU0	0.9	≤11.00	PASS
			52Tone	RU37	0.94	≤11.00	PASS
			106Tone	RU53	1	≤8.81	PASS
	total	5180	26Tone	RU0	3.72	≤8.81	PASS
			52Tone	RU37	3.65	≤8.81	PASS
			106Tone	RU53	3.50	≤8.81	PASS
	Ant1	5320	26Tone	RU8	-1.4	≤11.00	PASS
			52Tone	RU40	-1.8	≤11.00	PASS
			106Tone	RU54	-1.31	≤11.00	PASS
	Ant2	5320	26Tone	RU8	-0.4	≤11.00	PASS
			52Tone	RU40	-0.77	≤11.00	PASS
			106Tone	RU54	-0.42	≤11.00	PASS
	total	5320	26Tone	RU8	2.14	≤8.81	PASS
			52Tone	RU40	1.76	≤8.81	PASS
			106Tone	RU54	2.17	≤8.81	PASS
	Ant1	5500	26Tone	RU0	-0.16	≤11.00	PASS
			52Tone	RU37	-0.39	≤11.00	PASS
			106Tone	RU53	-0.32	≤11.00	PASS
	Ant2	5500	26Tone	RU0	0.19	≤11.00	PASS
			52Tone	RU37	-0.09	≤11.00	PASS
			106Tone	RU53	-0.01	≤11.00	PASS
	total	5500	26Tone	RU0	3.03	≤8.51	PASS
			52Tone	RU37	2.77	≤8.51	PASS
			106Tone	RU53	2.85	≤8.51	PASS
	Ant1	5700	26Tone	RU8	-0.43	≤11.00	PASS
			52Tone	RU40	-0.12	≤11.00	PASS
			106Tone	RU54	-0.16	≤11.00	PASS
	Ant2	5700	26Tone	RU8	-0.21	≤11.00	PASS
			52Tone	RU40	-0.34	≤11.00	PASS
			106Tone	RU54	0	≤11.00	PASS
	total	5700	26Tone	RU8	2.69	≤8.51	PASS
			52Tone	RU40	2.78	≤8.51	PASS
			106Tone	RU54	2.93	≤8.51	PASS
	Ant1	5745	26Tone	RU0	-2.75	≤30.00	PASS
			52Tone	RU37	-3	≤30.00	PASS
			106Tone	RU53	-2.76	≤30.00	PASS
	Ant2	5745	26Tone	RU0	-1.79	≤29.89	PASS
			52Tone	RU37	-2.16	≤29.89	PASS




	total	5745	106Tone	RU53	-2.04	≤29.89	PASS
			26Tone	RU0	0.77	≤26.96	PASS
			52Tone	RU37	0.45	≤26.96	PASS
			106Tone	RU53	0.63	≤26.96	PASS
	Ant1	5825	26Tone	RU8	-3.6	≤30.00	PASS
			52Tone	RU40	-3.35	≤30.00	PASS
			106Tone	RU54	-3.56	≤30.00	PASS
	Ant2	5825	26Tone	RU8	-3.19	≤29.89	PASS
			52Tone	RU40	-2.83	≤29.89	PASS
			106Tone	RU54	-3.16	≤29.89	PASS
	total	5825	26Tone	RU8	-0.38	≤26.96	PASS
			52Tone	RU40	-0.07	≤26.96	PASS
			106Tone	RU54	-0.35	≤26.96	PASS



Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.



2.The Duty Cycle Factor and is compensated in the graph.







Test Graphs


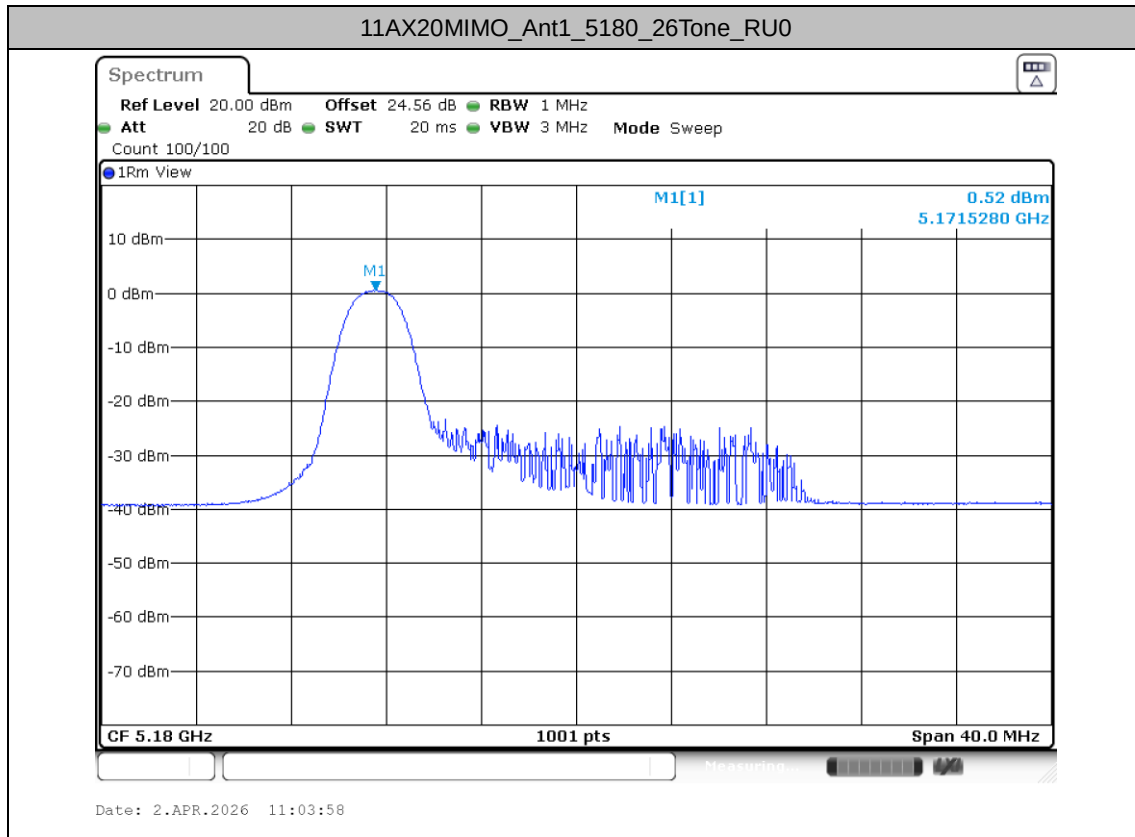


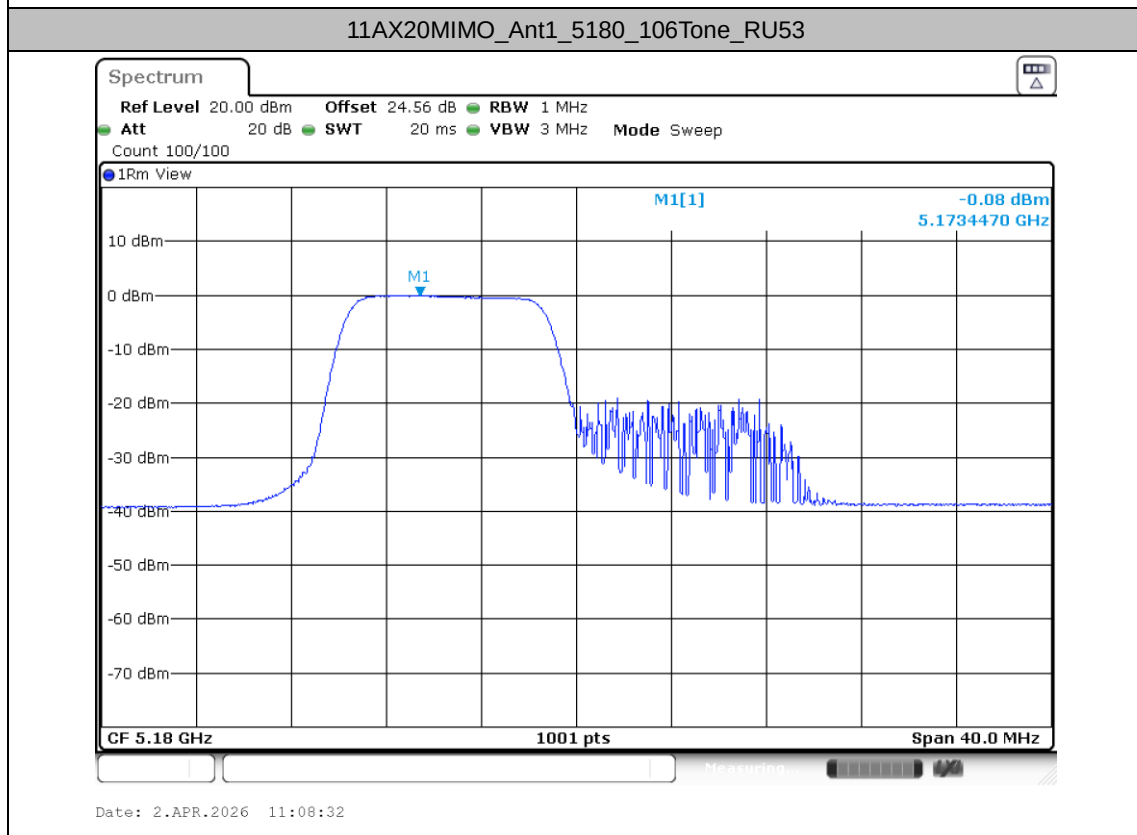
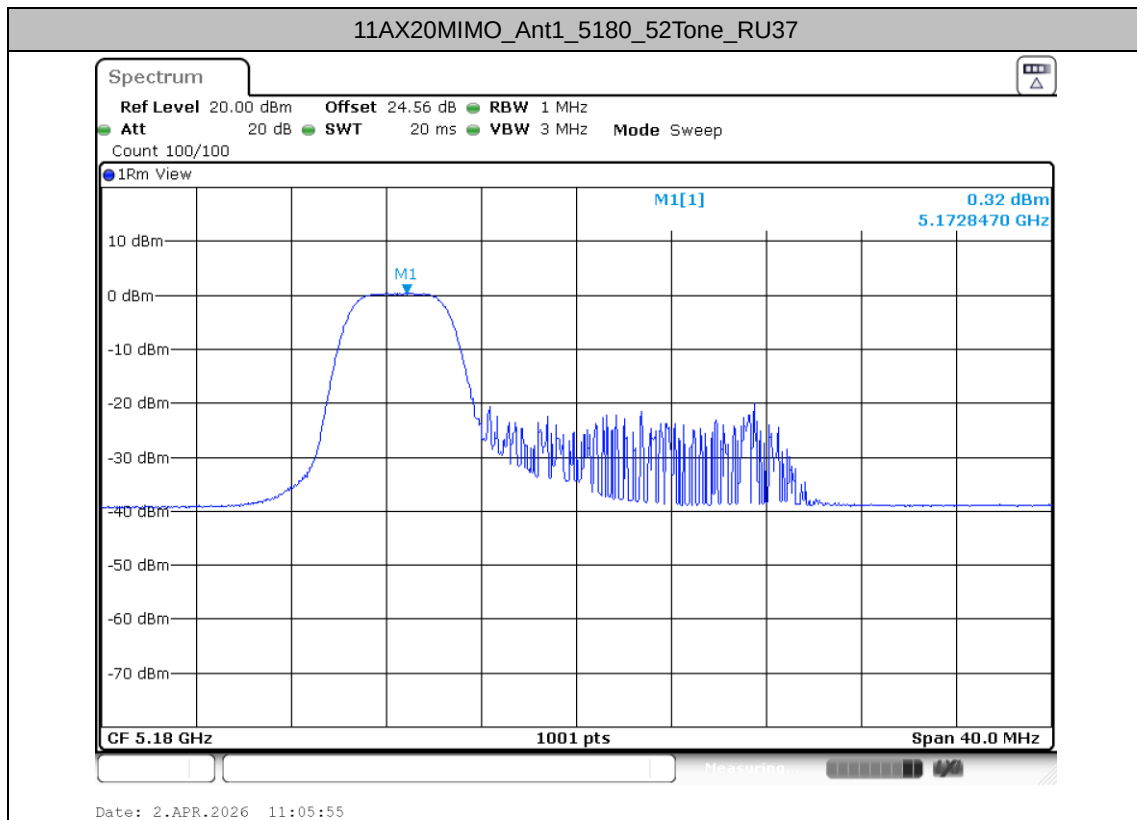


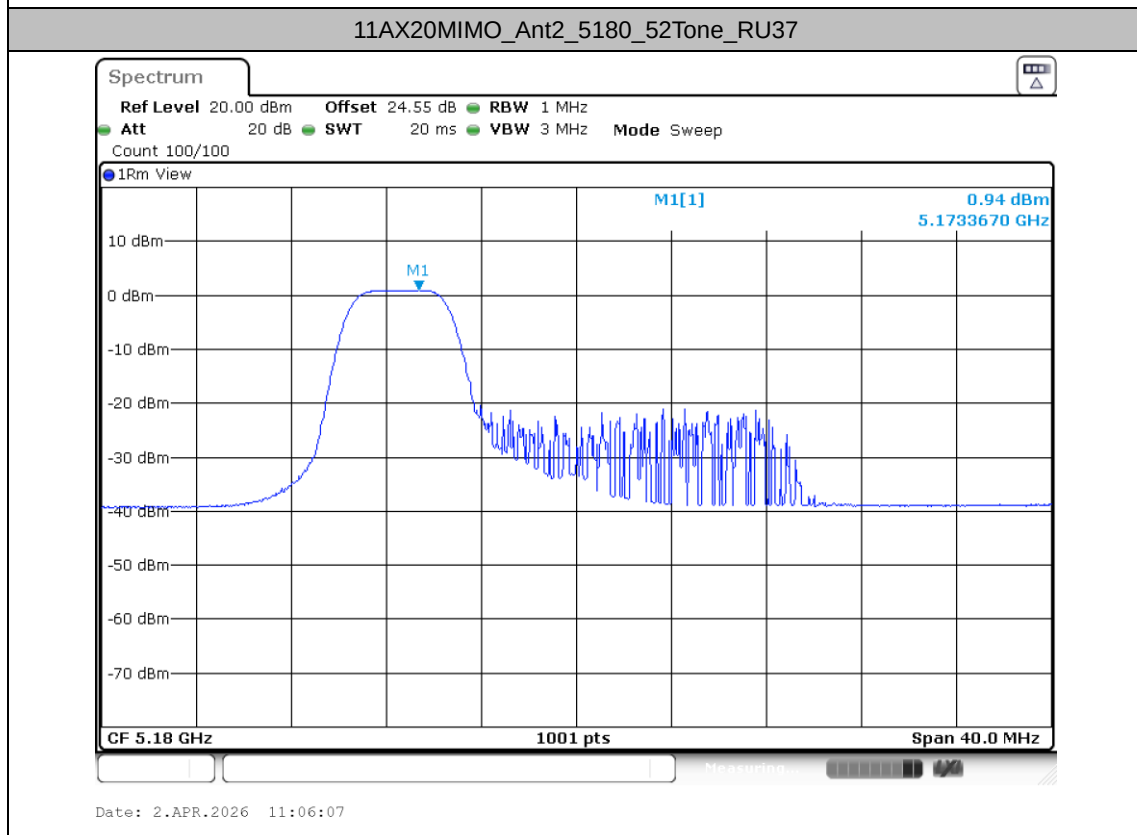
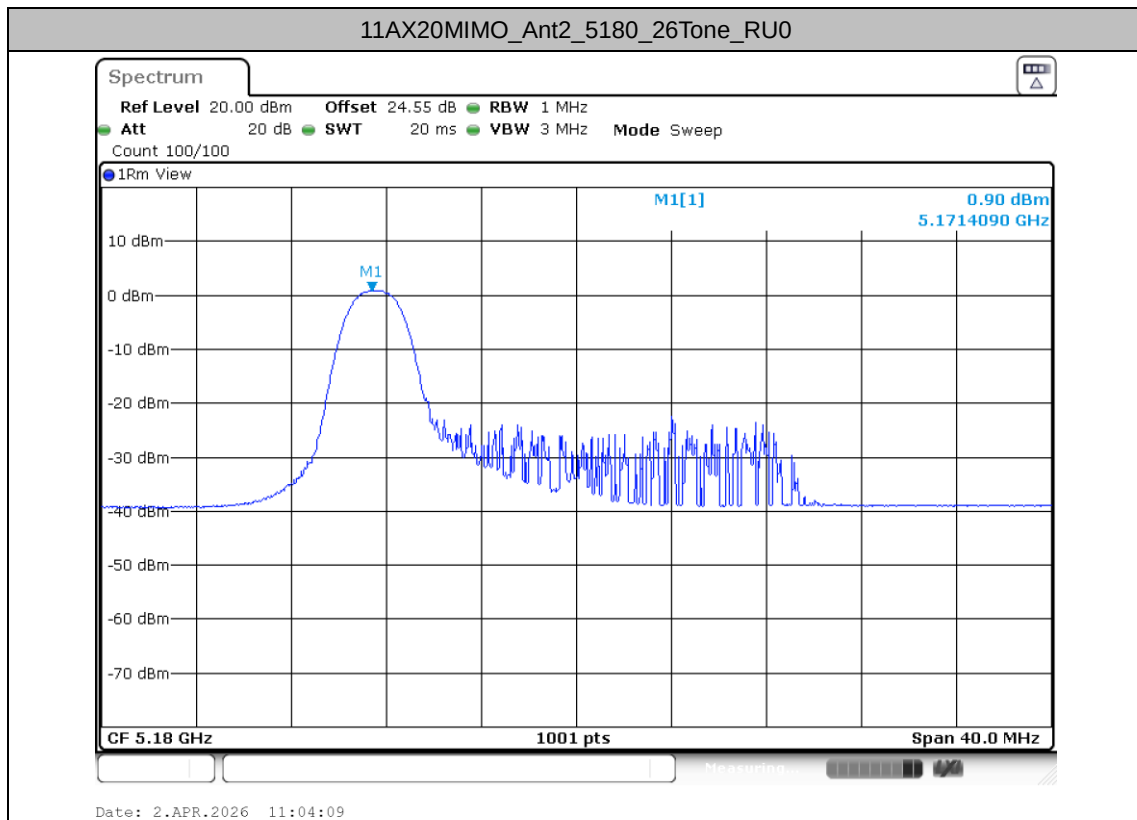


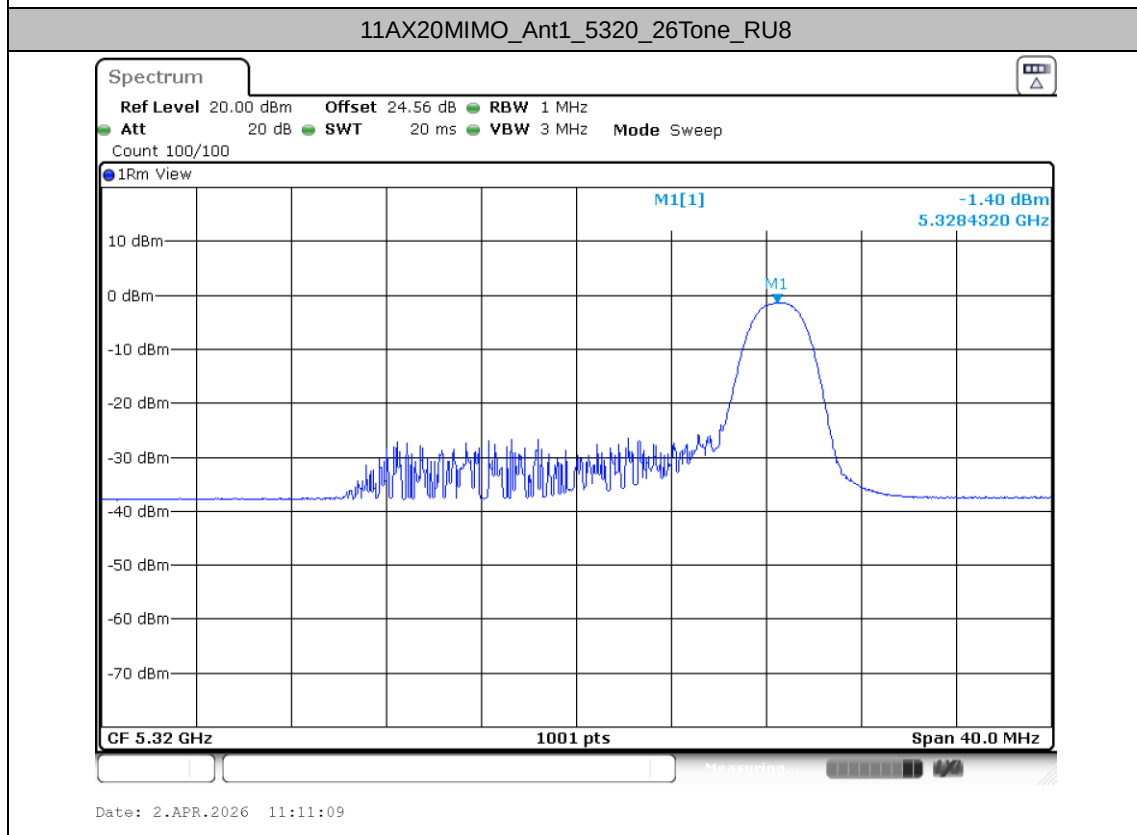
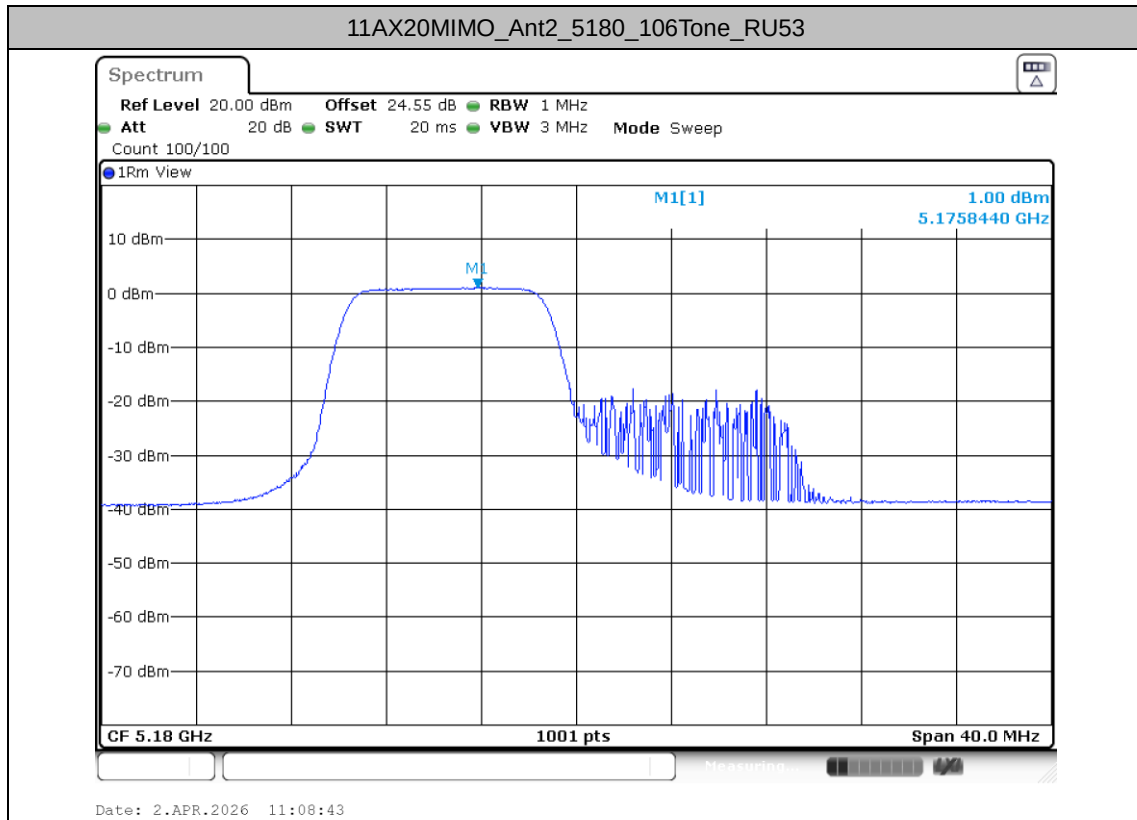


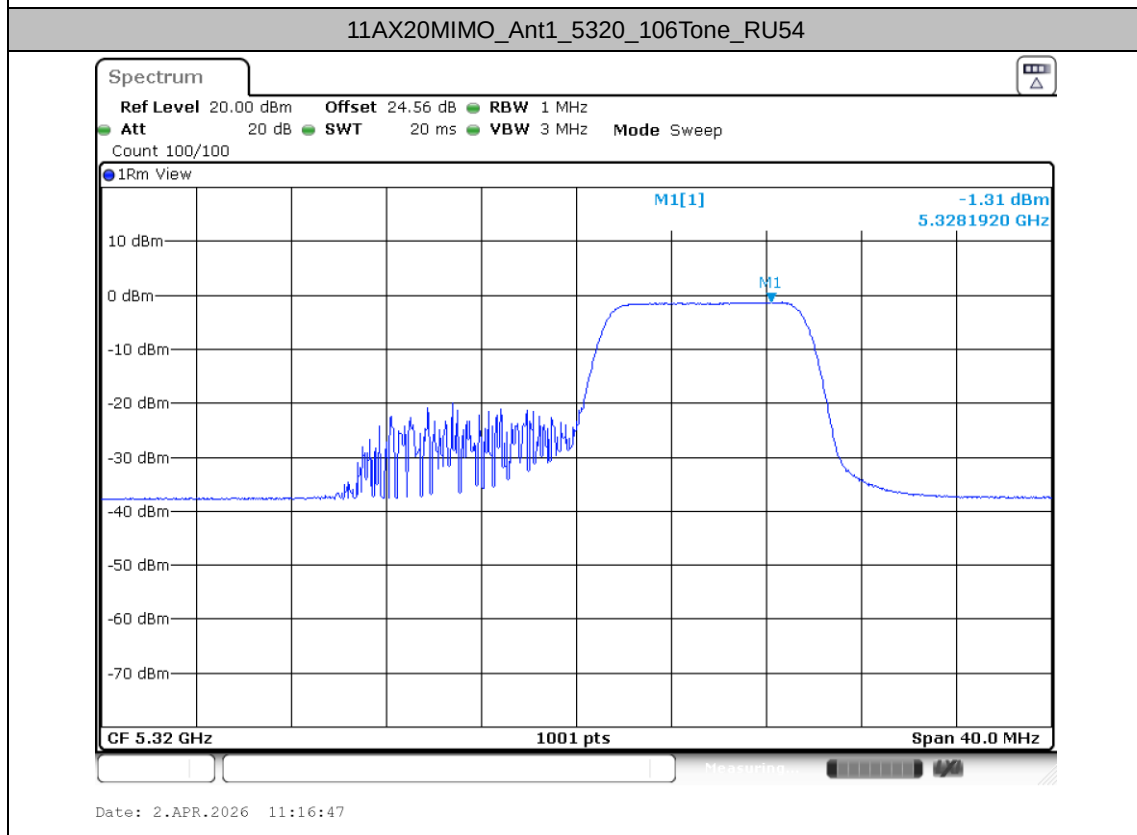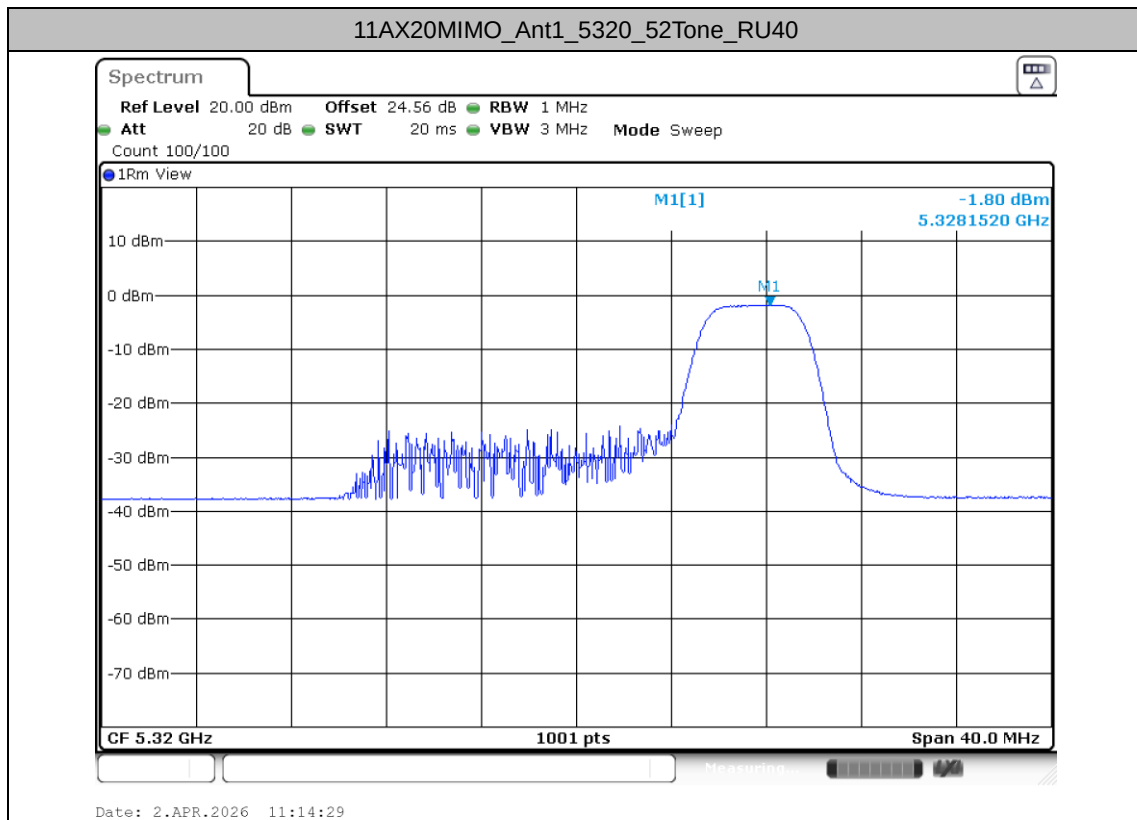


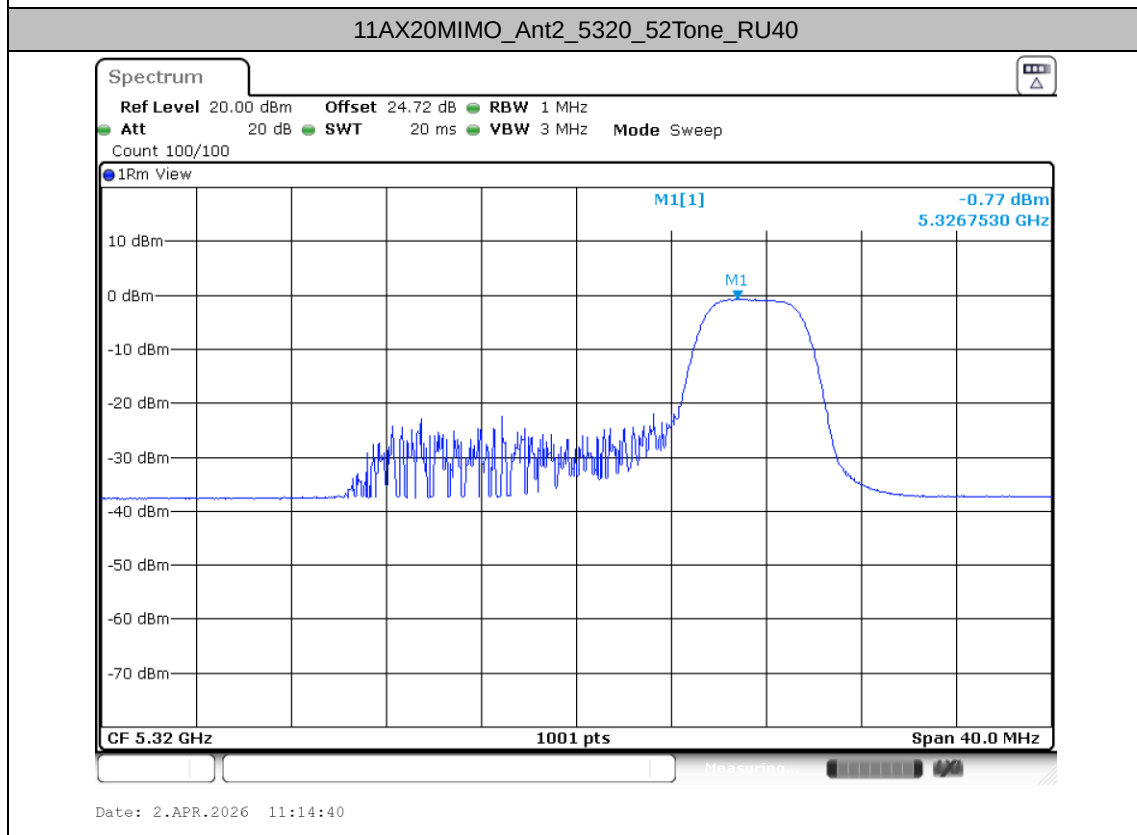
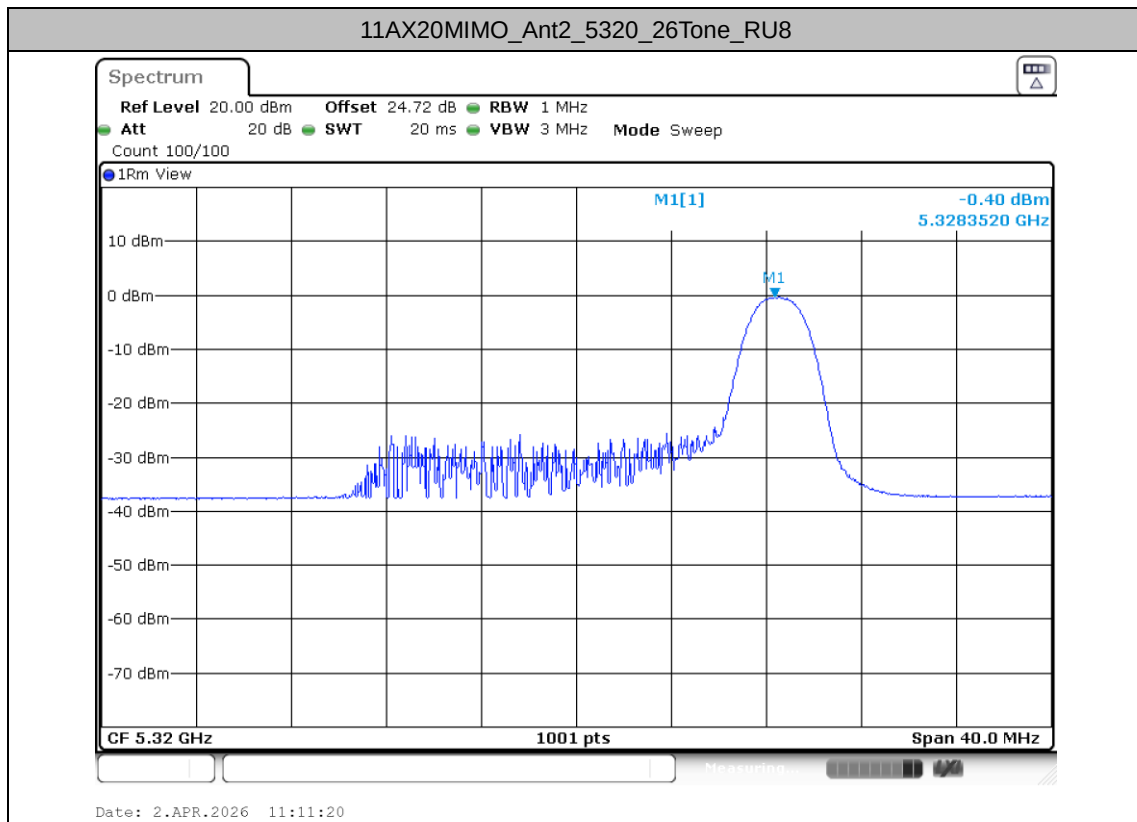


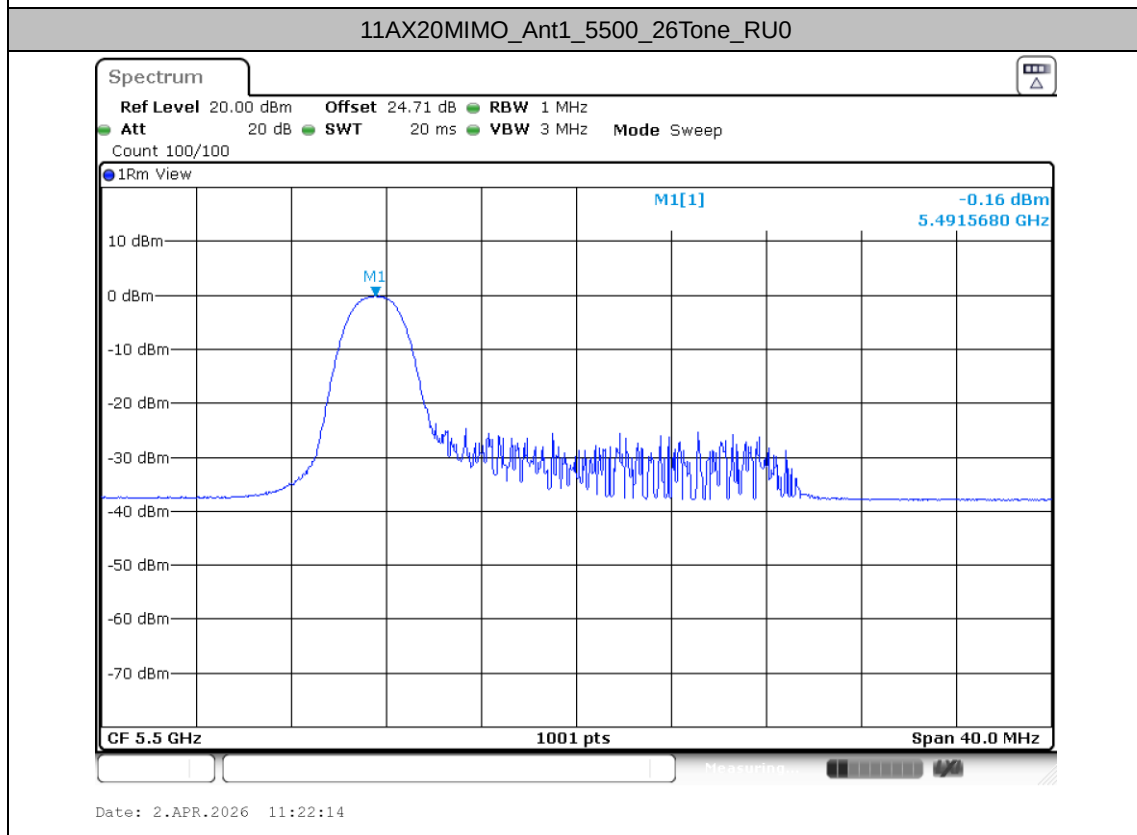
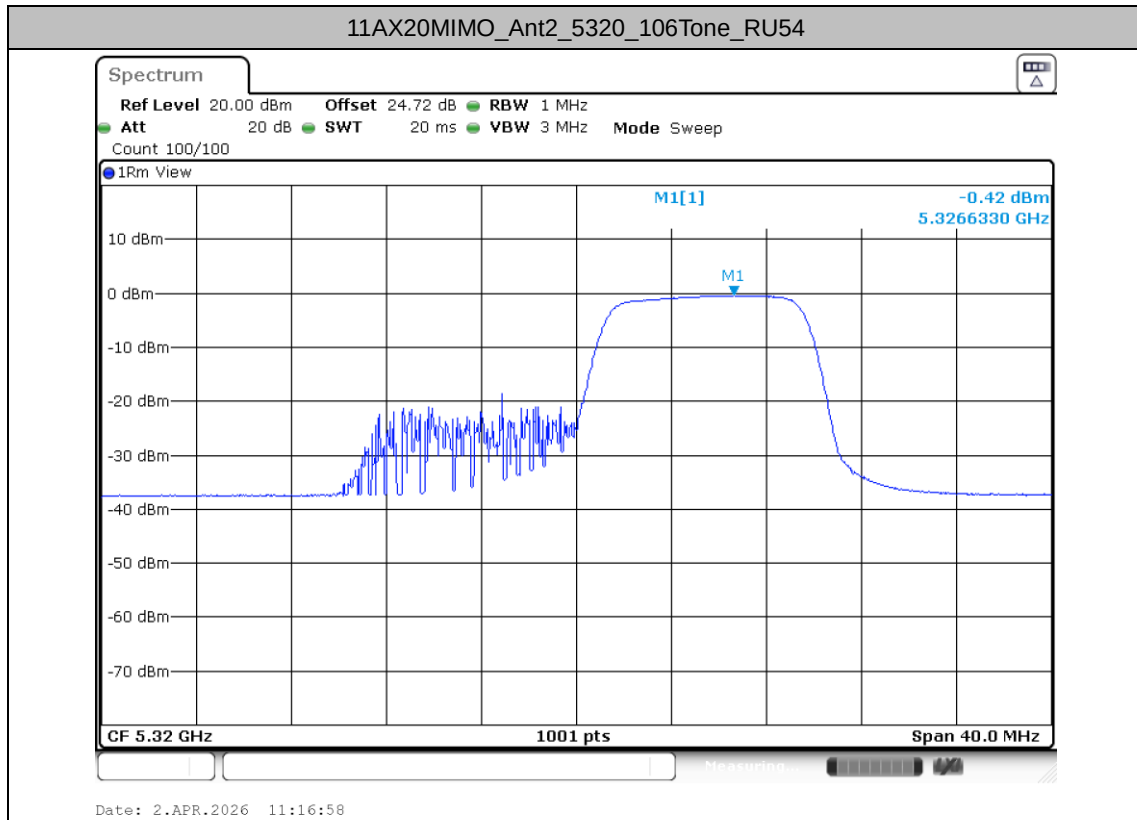


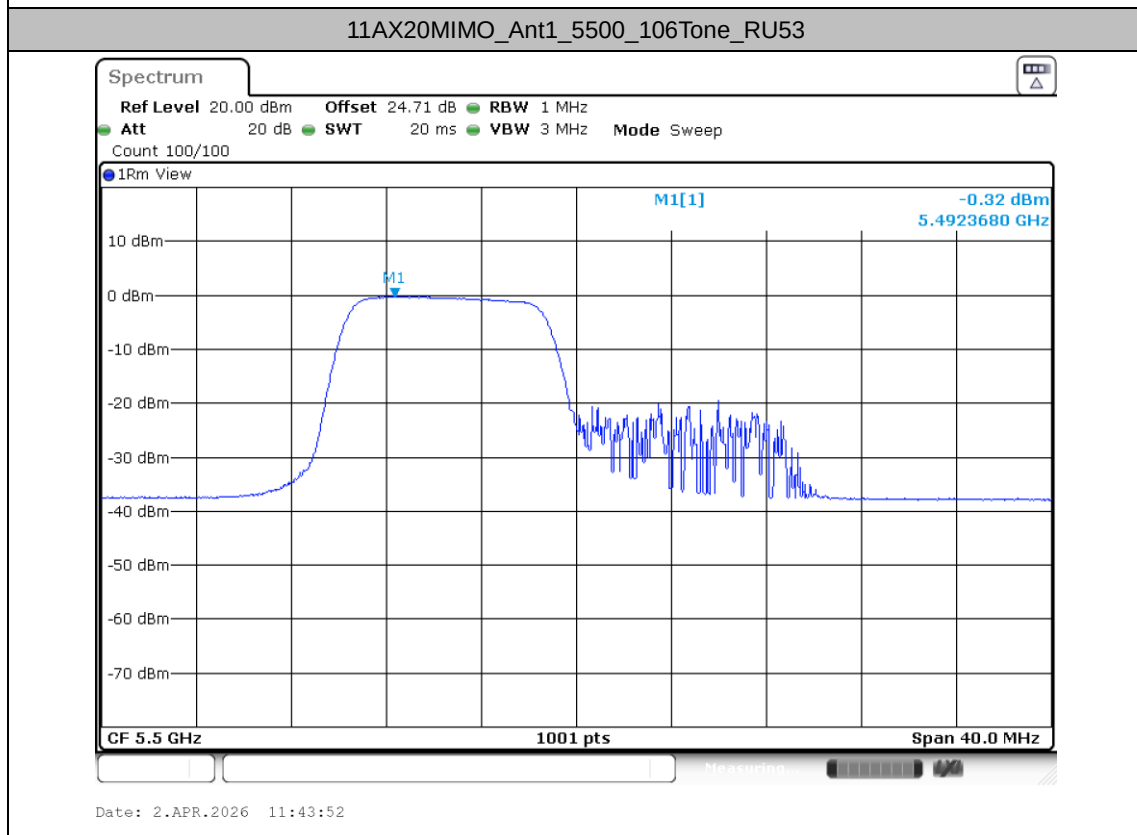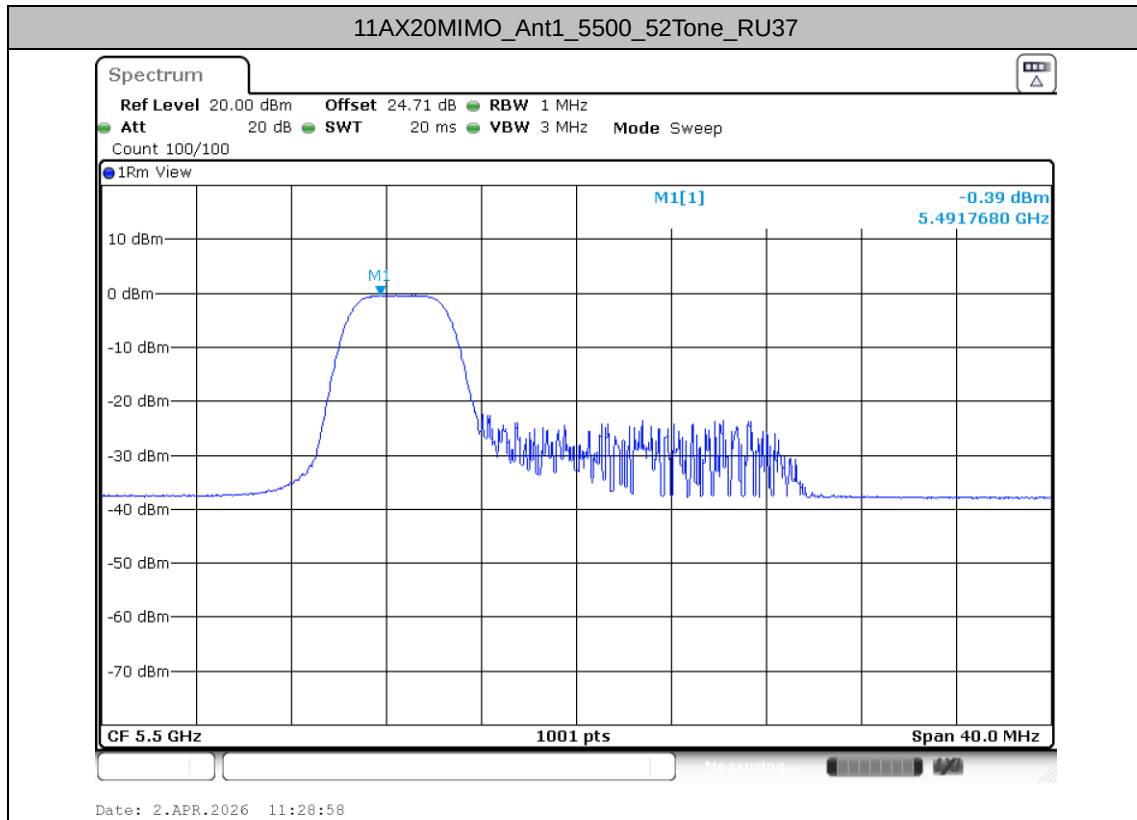


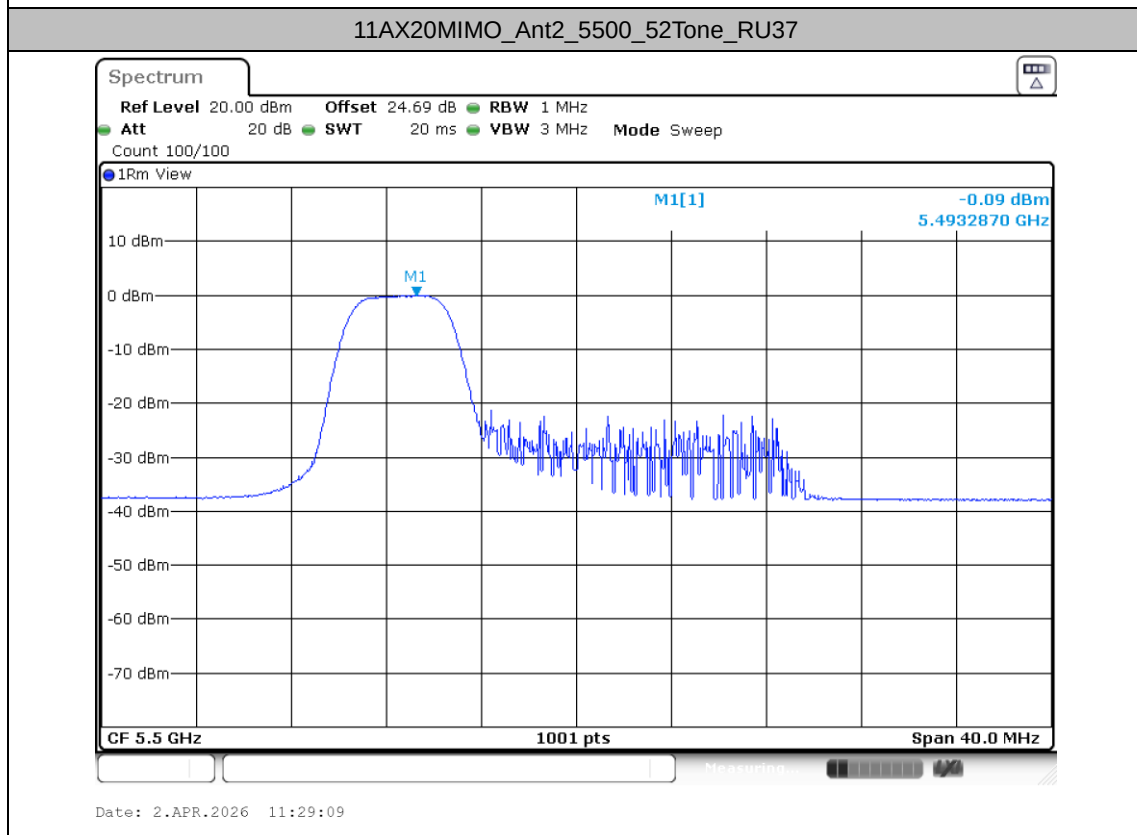
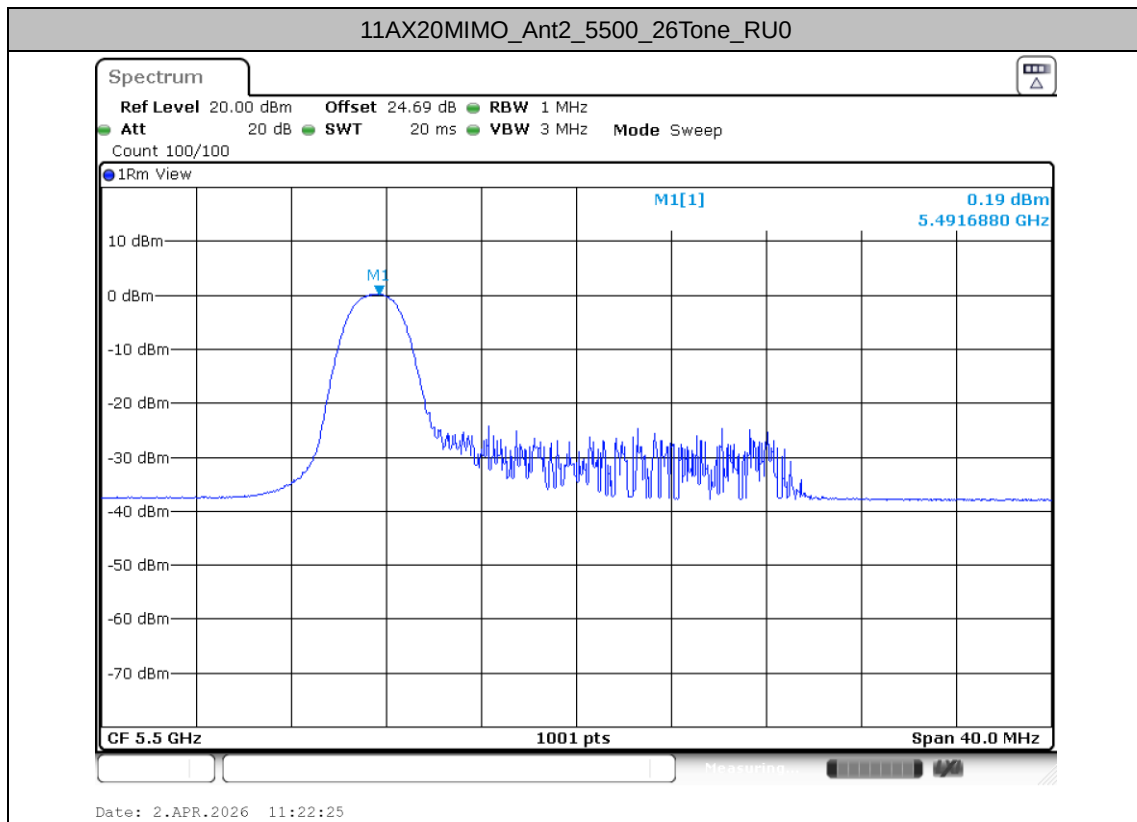



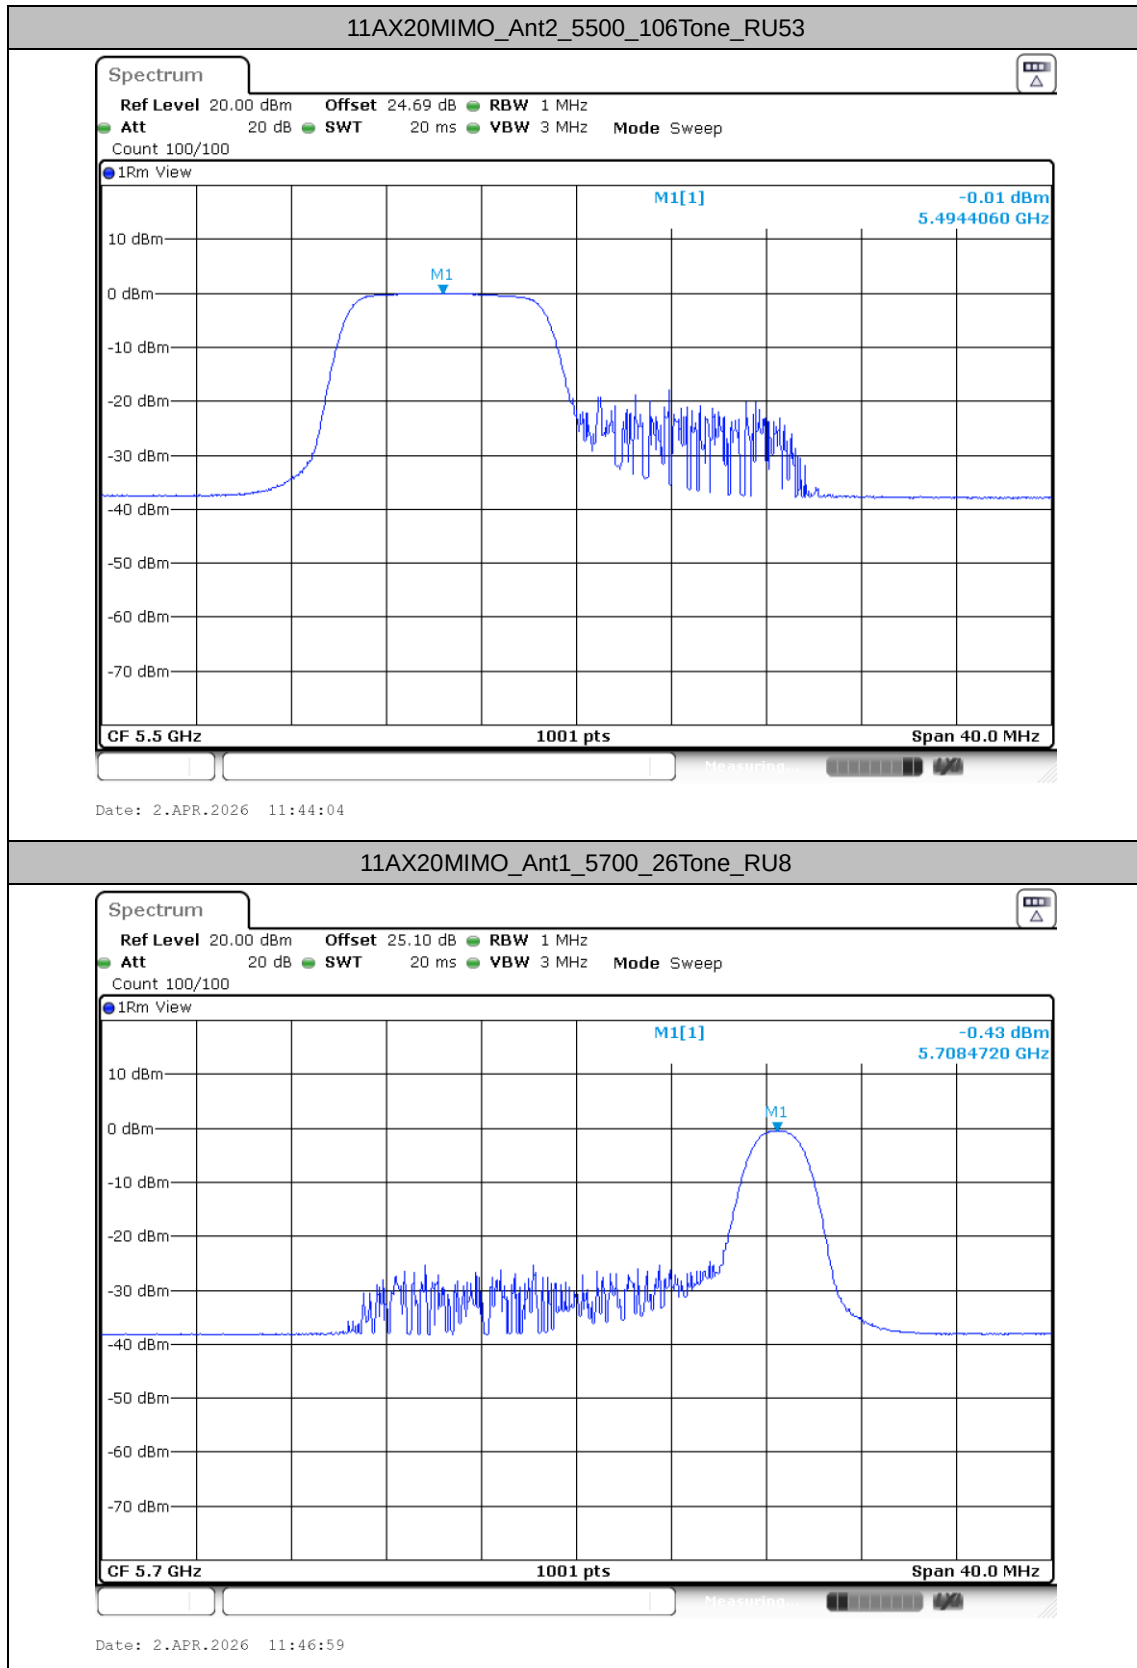


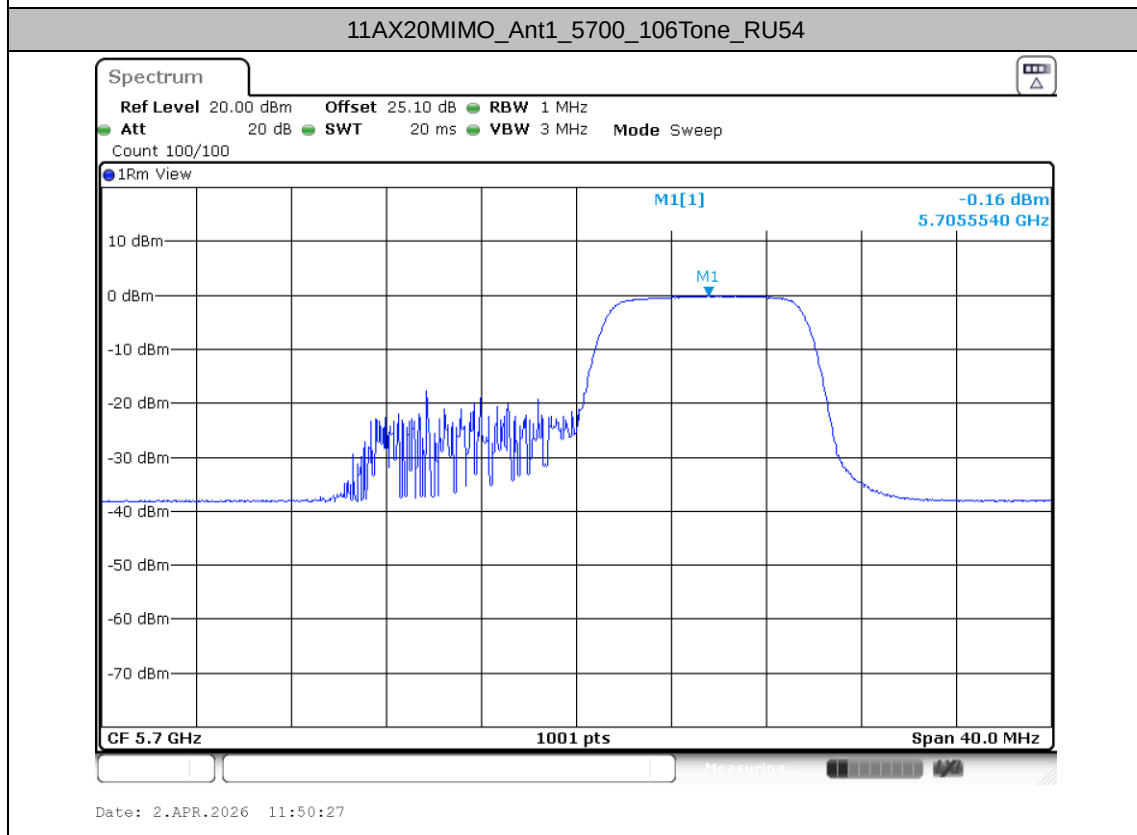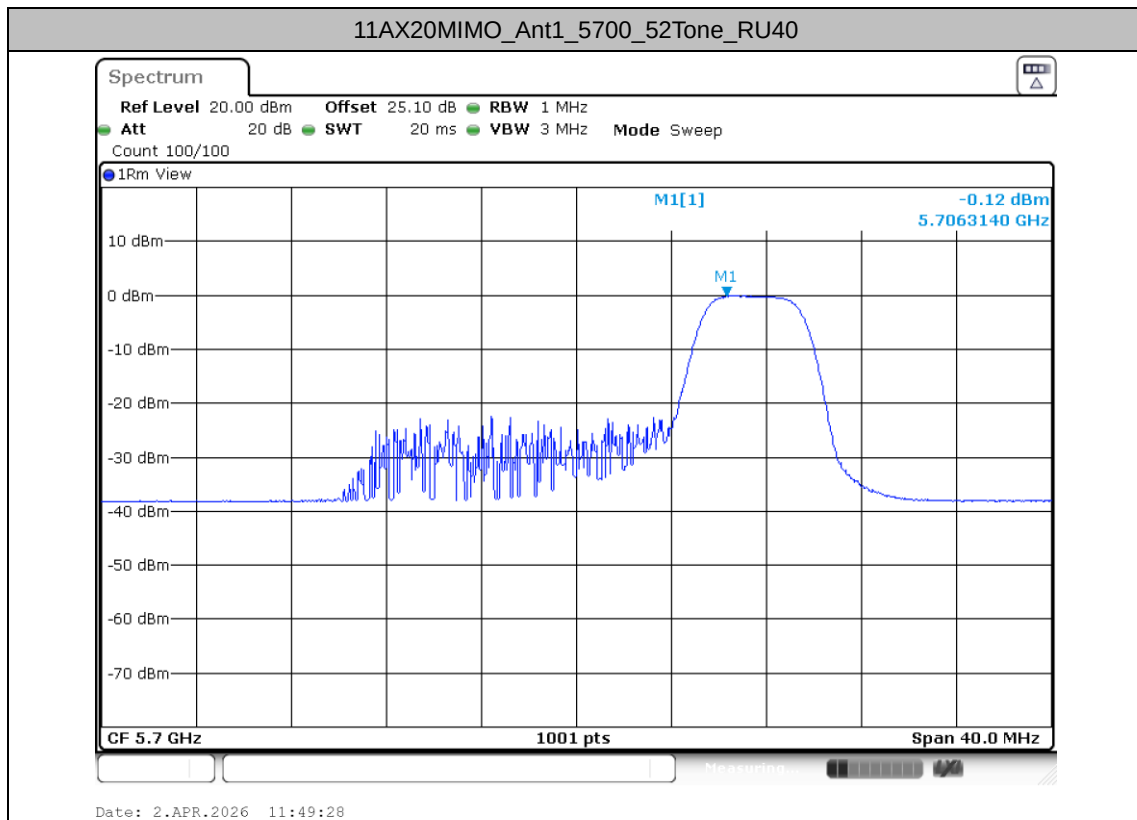


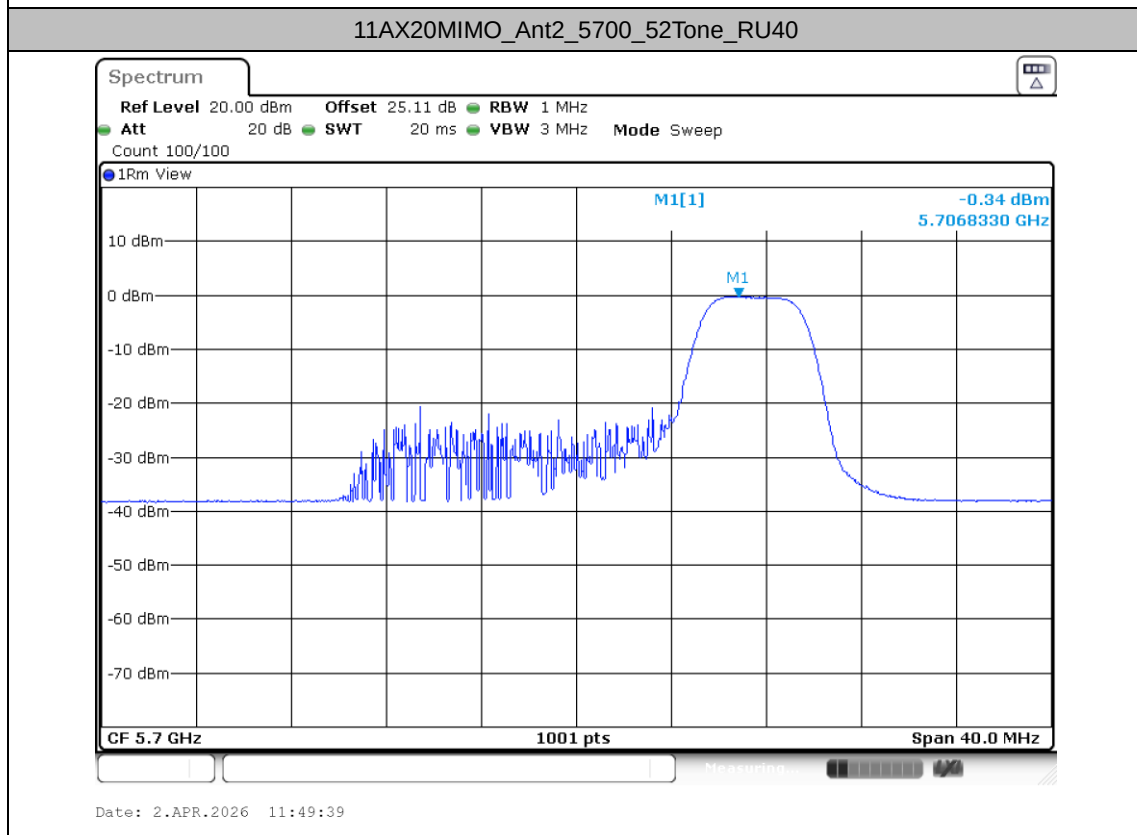
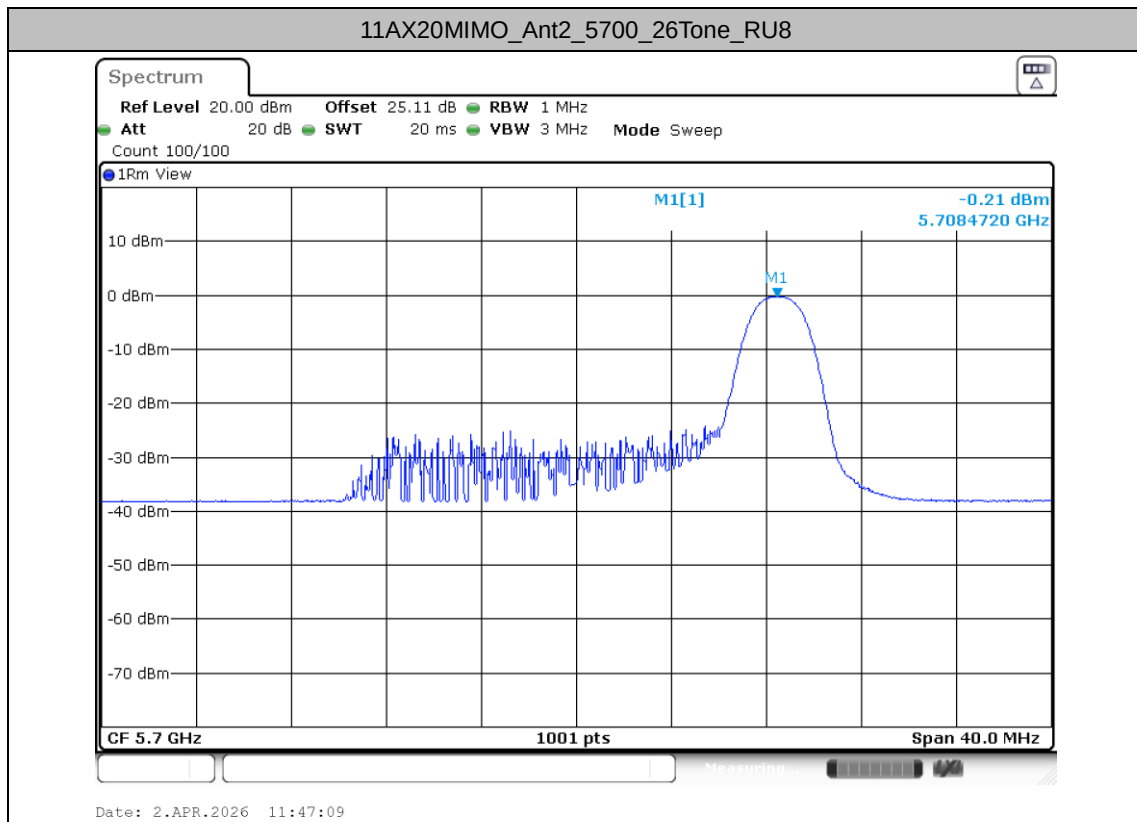



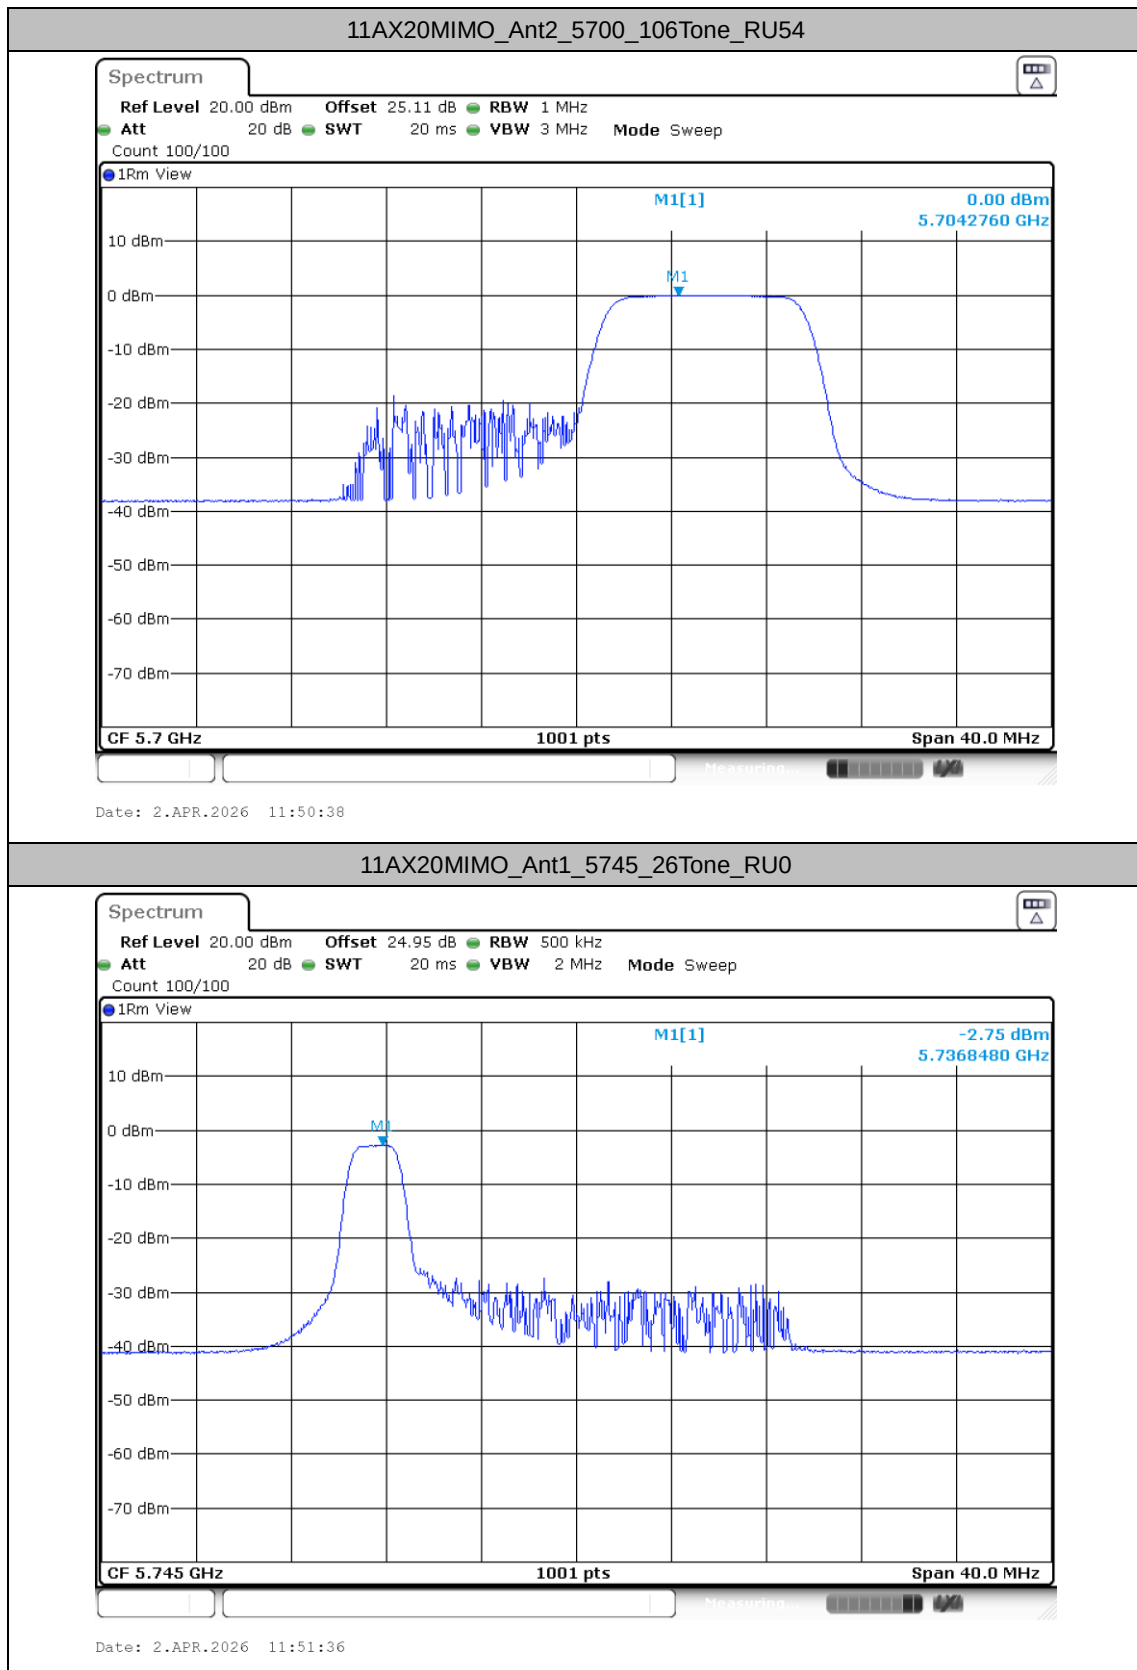


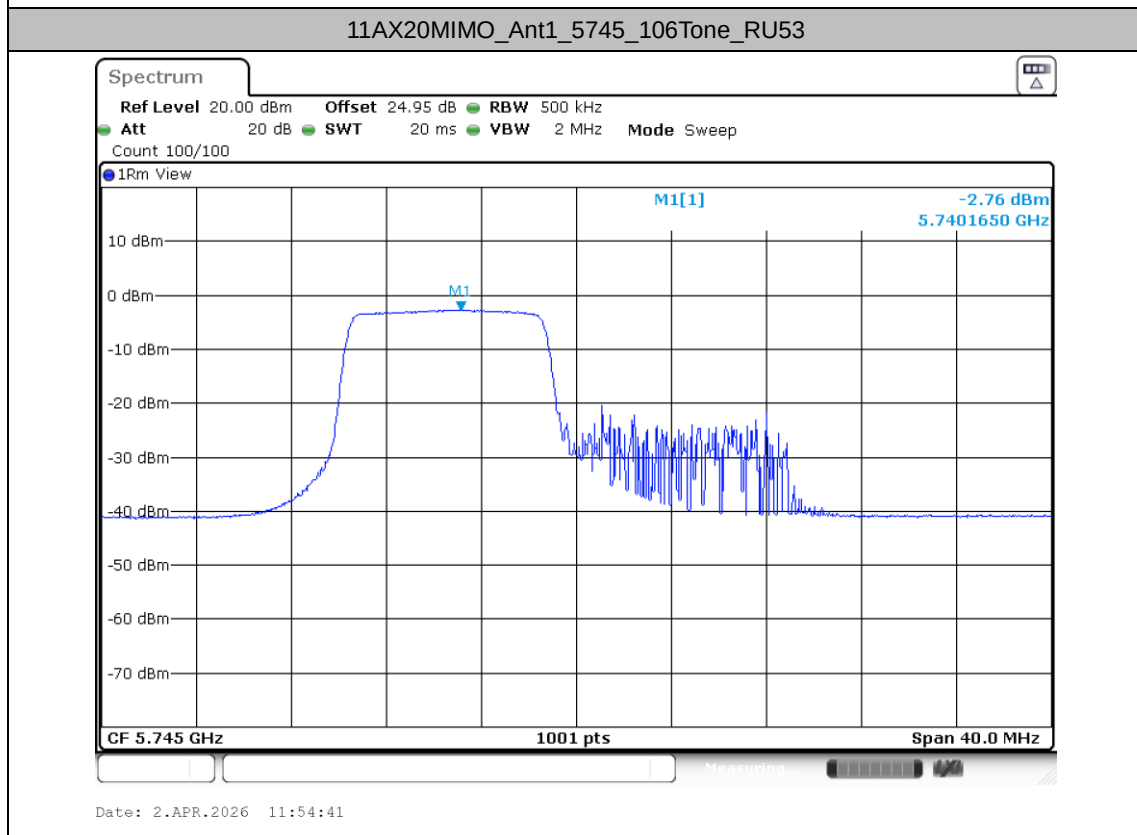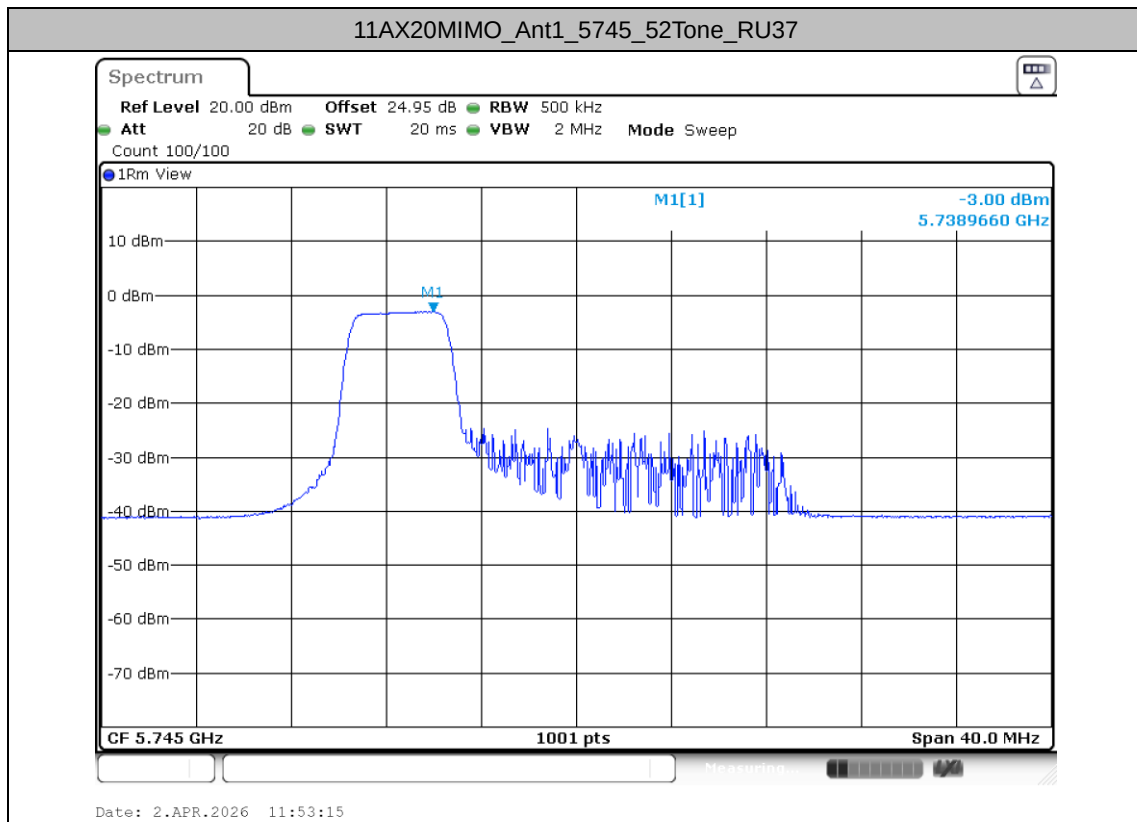


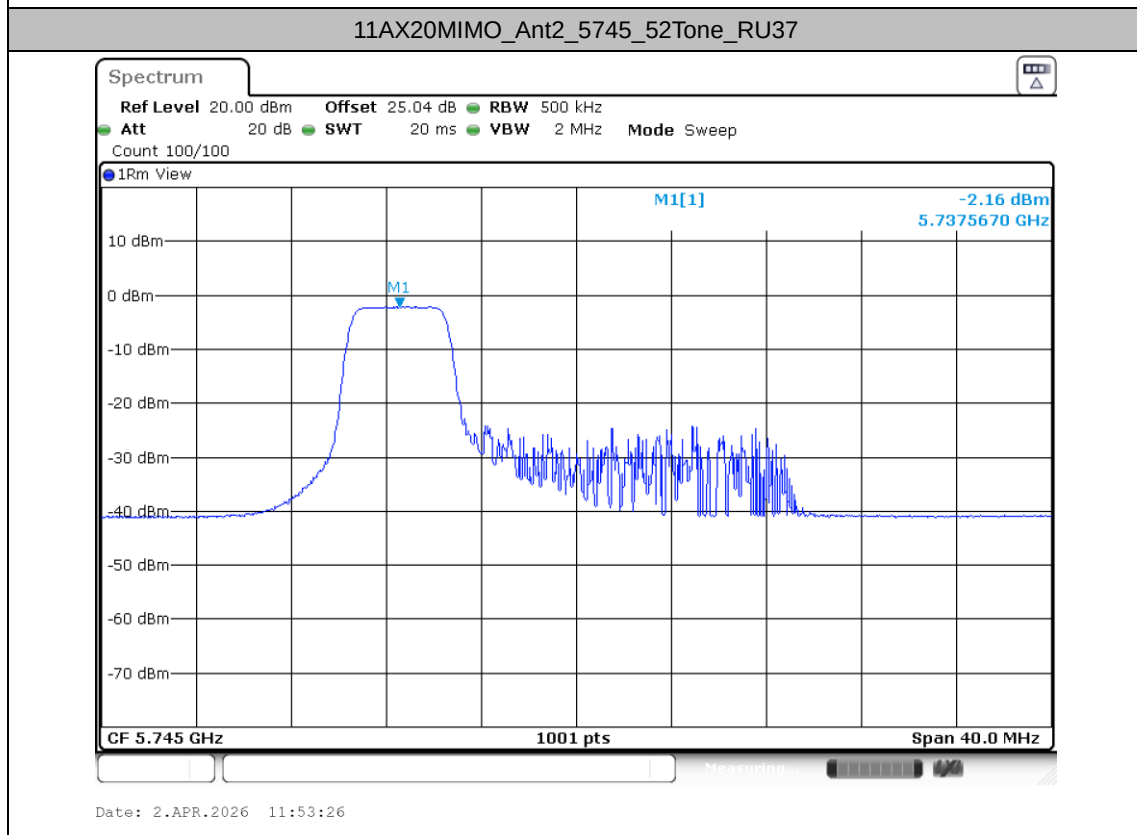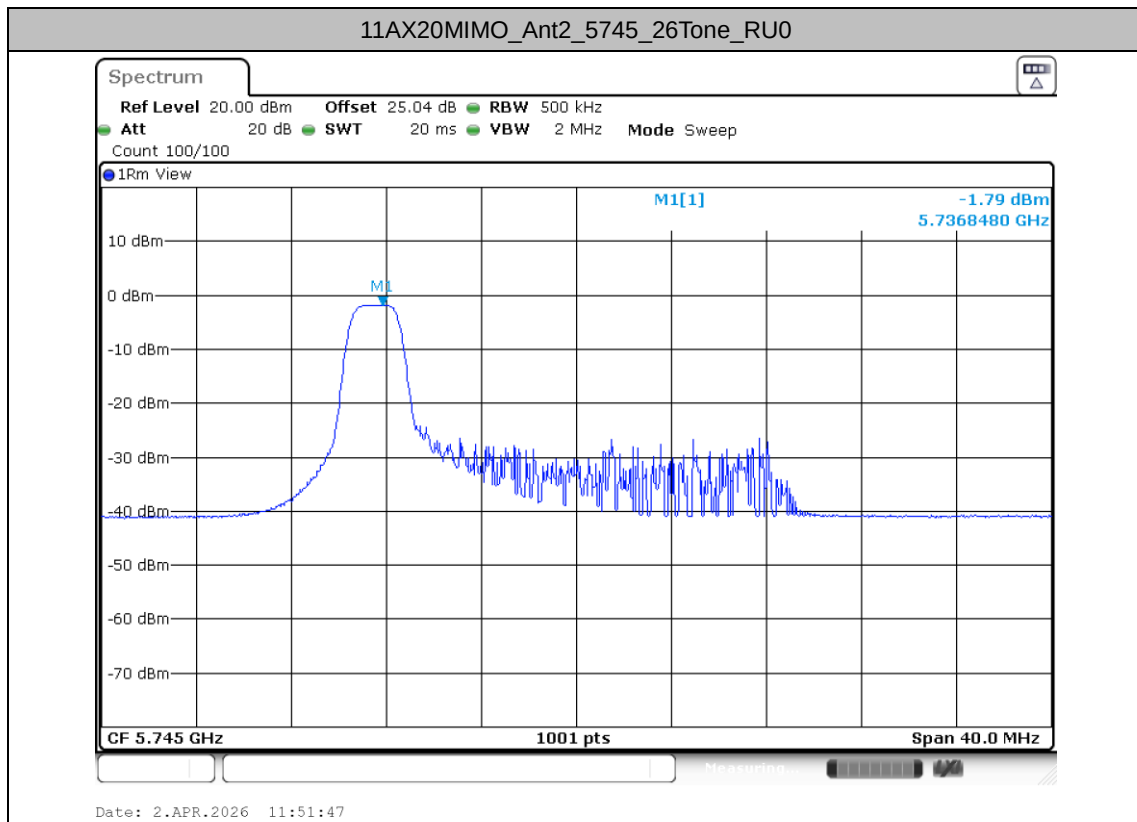

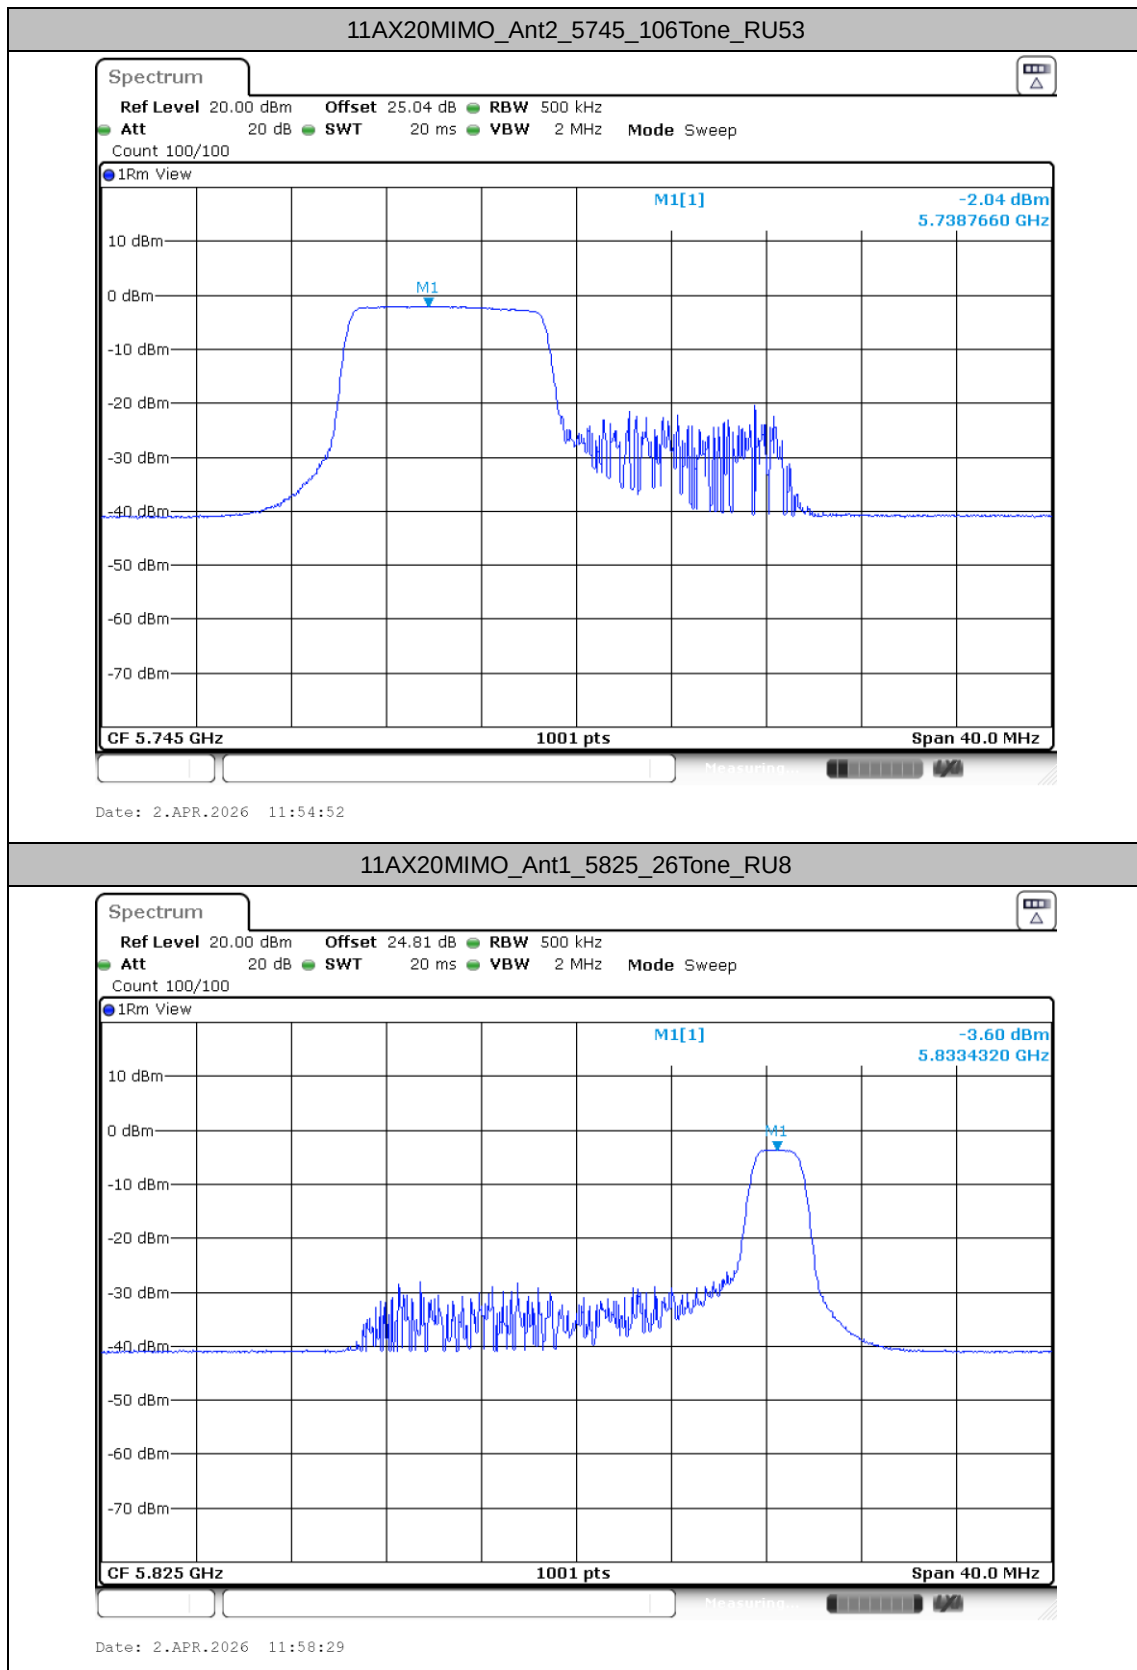

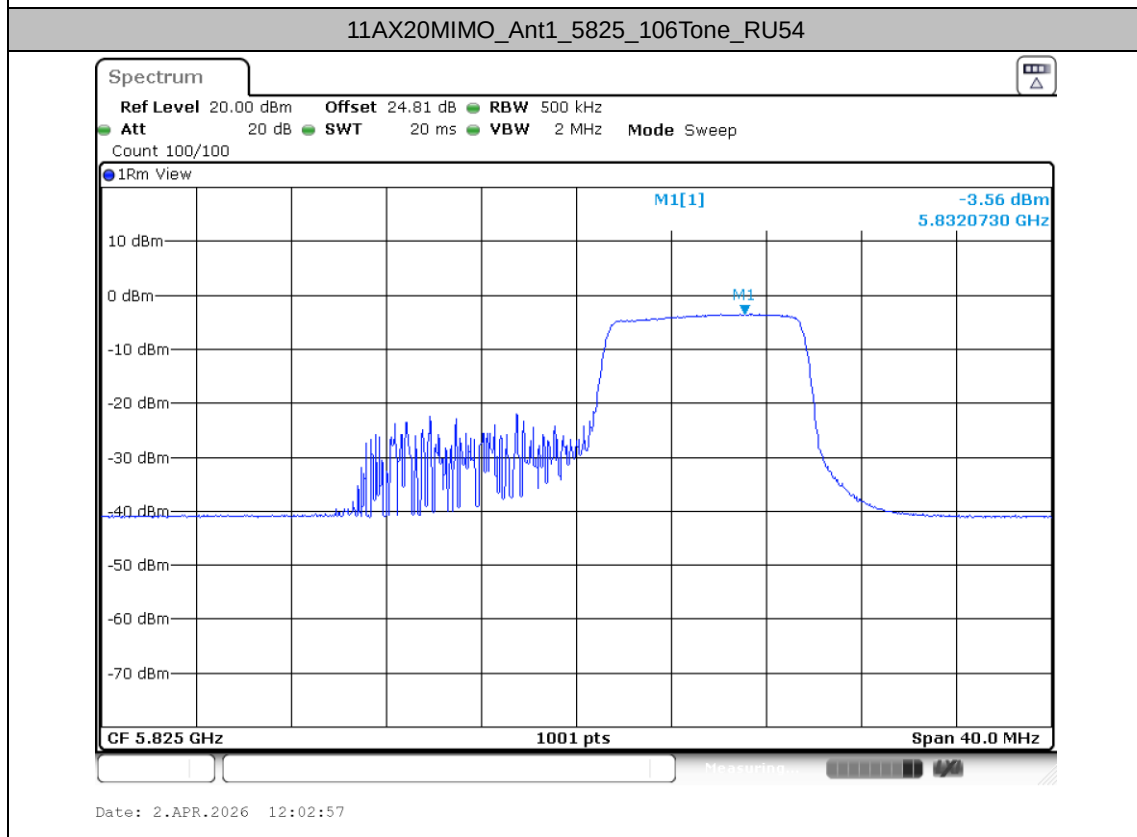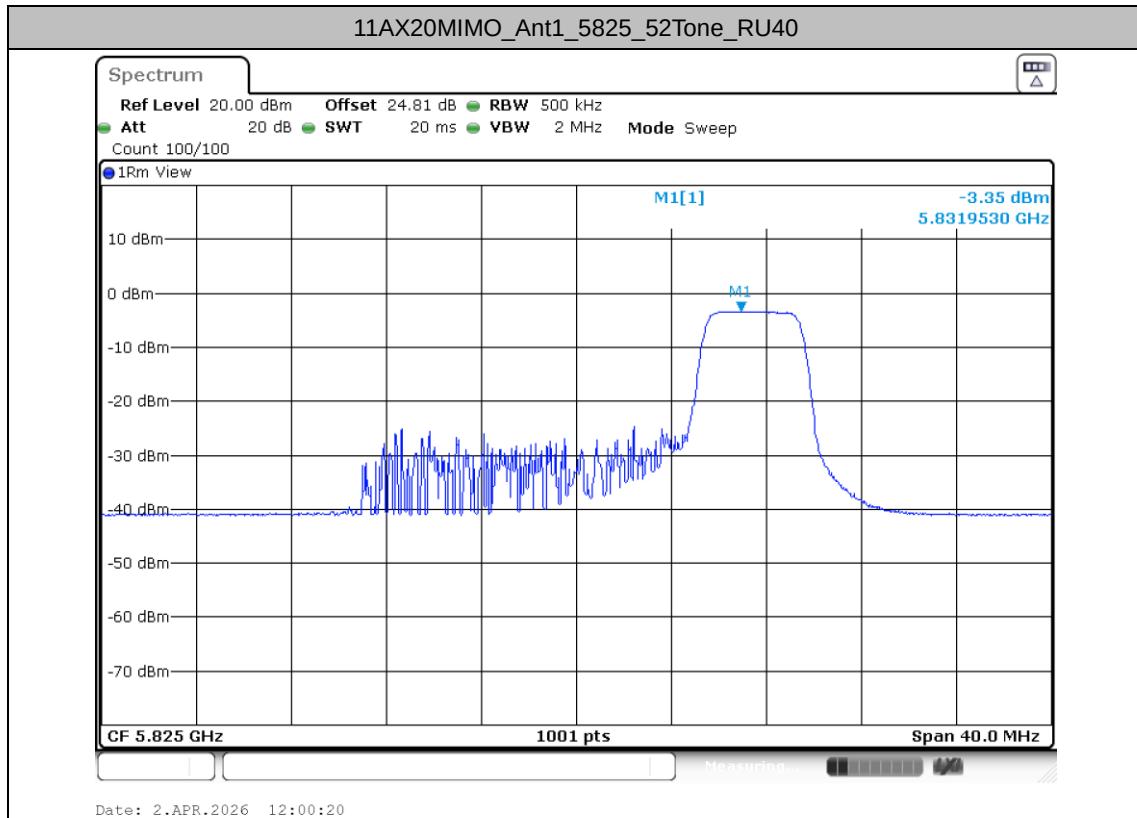

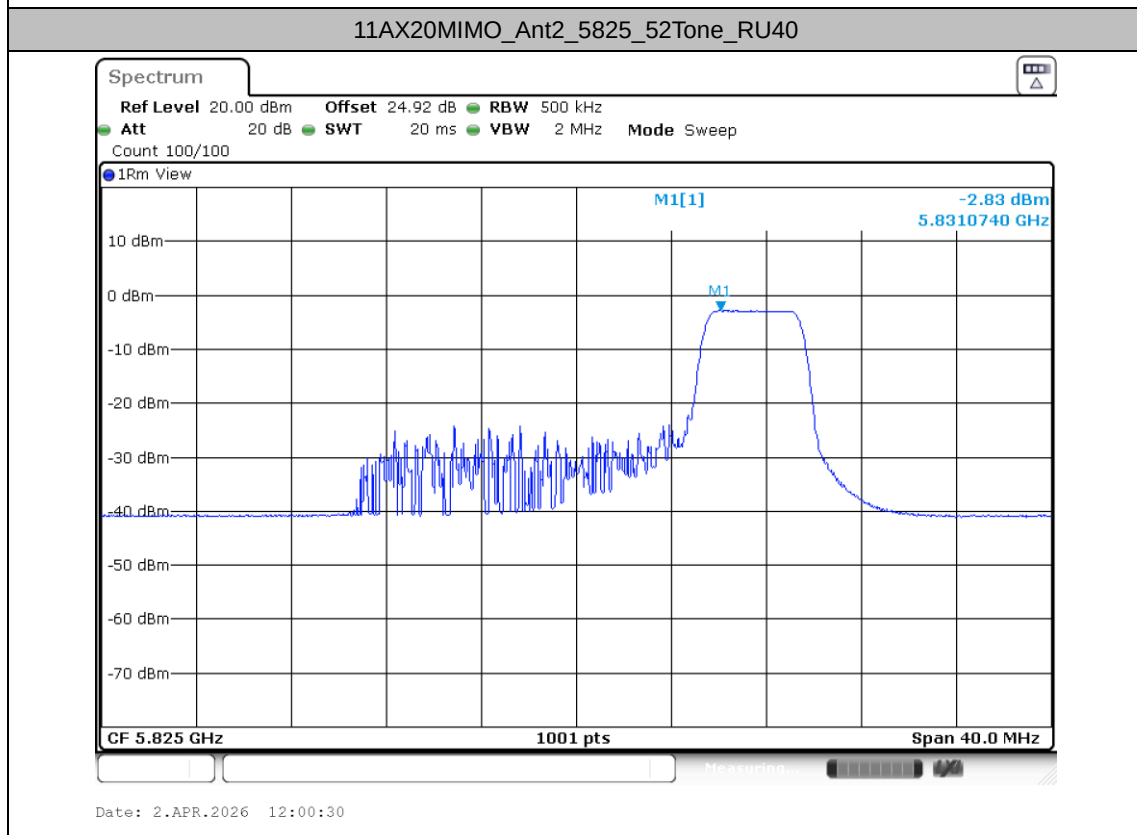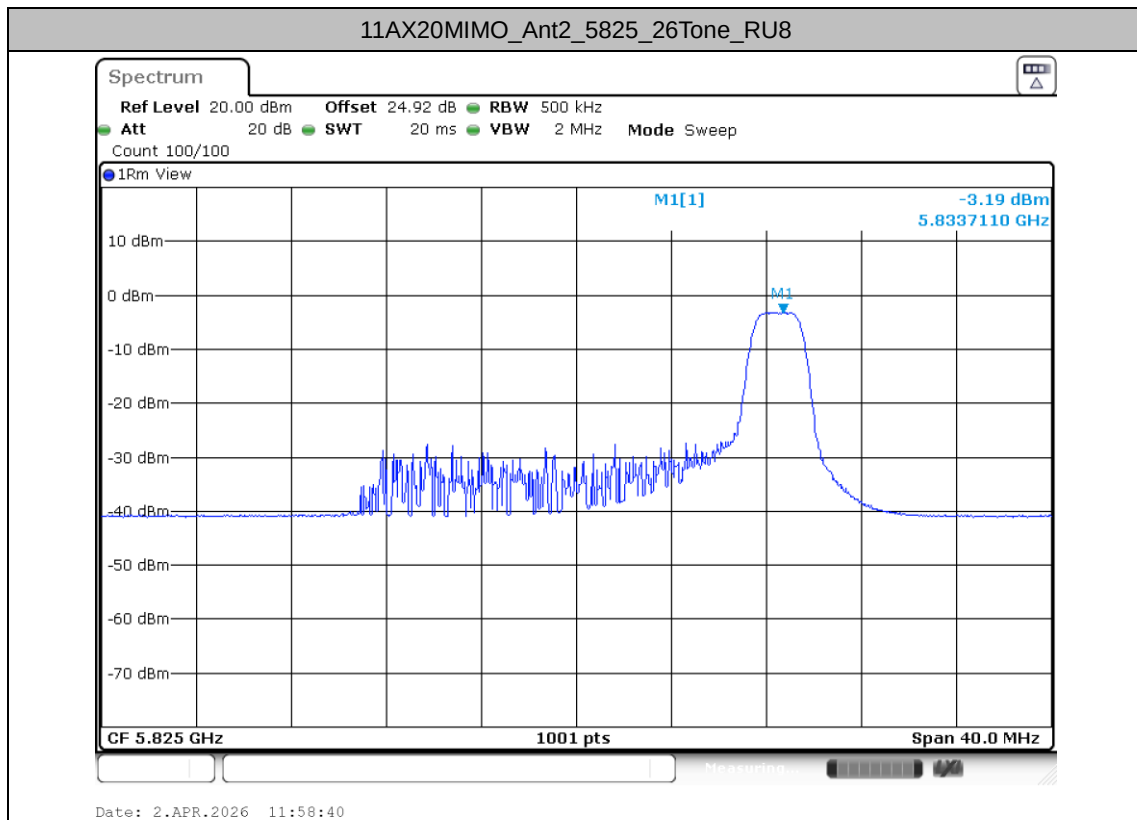


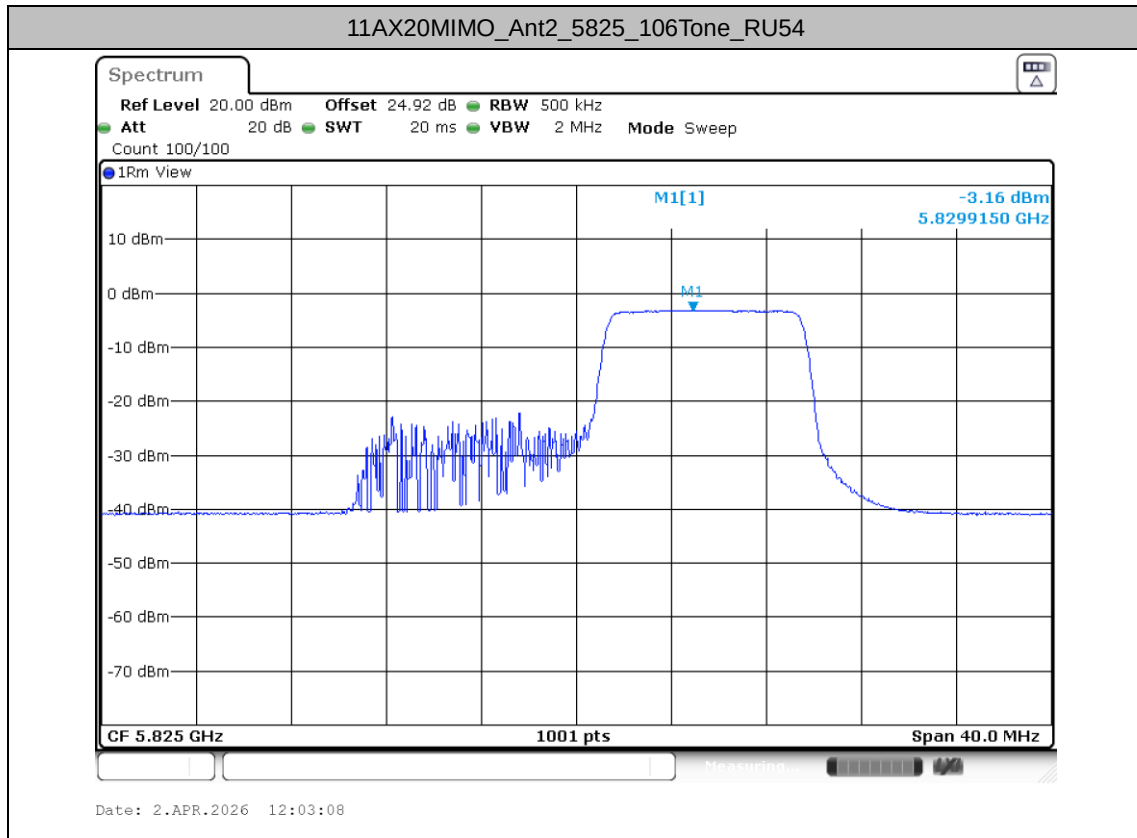



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

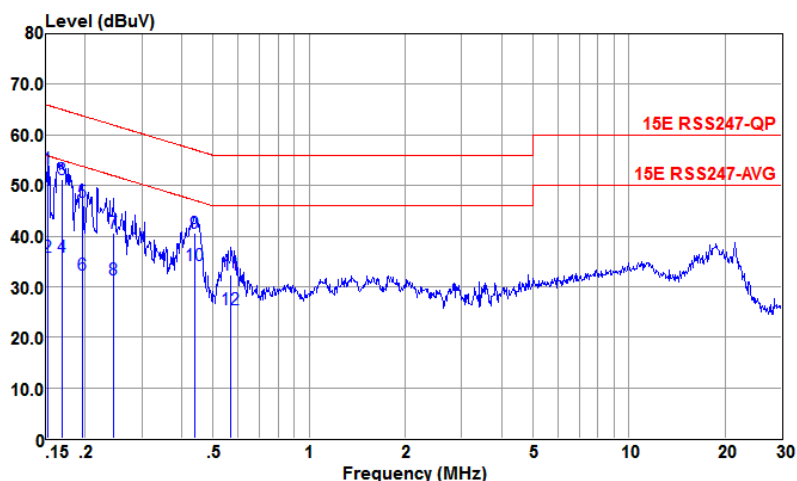


Site : CO01-KS
Condition : 15E RSS247-QP LISN-100334-L 2025 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
1 *	0.152	53.32	-12.55	65.87	33.30	9.55	10.47	QP
2	0.152	35.92	-19.95	55.87	15.90	9.55	10.47	Average
3	0.169	51.22	-13.77	64.99	31.20	9.55	10.47	QP
4	0.169	35.92	-19.07	54.99	15.90	9.55	10.47	Average
5	0.197	46.83	-16.93	63.76	26.80	9.55	10.48	QP
6	0.197	32.23	-21.53	53.76	12.20	9.55	10.48	Average
7	0.246	40.61	-21.30	61.91	20.51	9.62	10.48	QP
8	0.246	31.41	-20.50	51.91	11.31	9.62	10.48	Average
9	0.440	40.69	-16.38	57.07	20.60	9.59	10.50	QP
10	0.440	34.29	-12.78	47.07	14.20	9.59	10.50	Average
11	0.570	32.30	-23.70	56.00	12.20	9.59	10.51	QP
12	0.570	25.40	-20.60	46.00	5.30	9.59	10.51	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

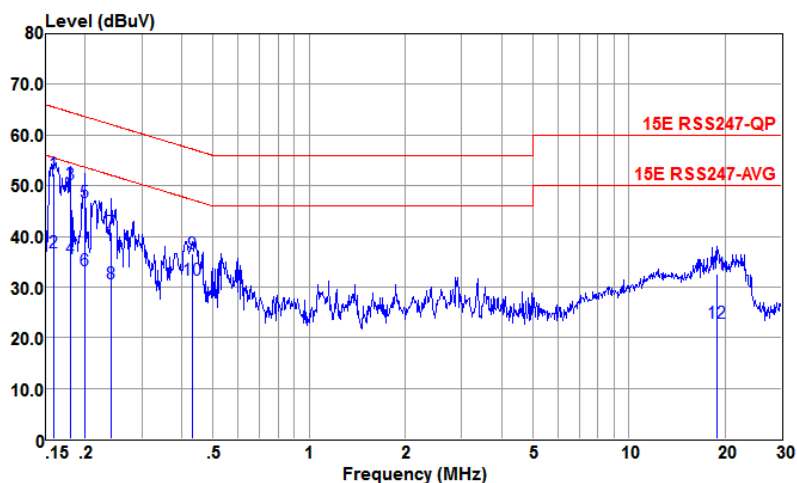

Site : CO01-KS

Condition : 15E RSS247-QP LISN-100334-N 2025 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1 *	0.159	52.32	-13.20	65.52	32.30	9.55	10.47	QP
2	0.159	36.82	-18.70	55.52	16.80	9.55	10.47	Average
3	0.180	50.24	-14.26	64.50	30.20	9.56	10.48	QP
4	0.180	35.64	-18.86	54.50	15.60	9.56	10.48	Average
5	0.200	46.68	-16.94	63.62	26.60	9.60	10.48	QP
6	0.200	33.38	-20.24	53.62	13.30	9.60	10.48	Average
7	0.242	40.73	-21.31	62.04	20.60	9.65	10.48	QP
8	0.242	30.73	-21.31	52.04	10.60	9.65	10.48	Average
9	0.431	36.66	-20.58	57.24	16.50	9.66	10.50	QP
10	0.431	31.36	-15.88	47.24	11.20	9.66	10.50	Average
11	18.920	32.49	-27.51	60.00	12.21	9.77	10.51	QP
12	18.920	22.89	-27.11	50.00	2.61	9.77	10.51	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Maven	Relative Humidity :	52 ~ 56 %
		Temperature :	22 ~ 25 °C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	1+2	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	1+2	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	1+2	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	1+2	802.11a	52	5260	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	1+2	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	1+2	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	1+2	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	1+2	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	1+2	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	1+2	802.11ax HE20	36	5180	MCS0	Full	-
Mode 11	U-NII-1	5.15-5.25	1+2	802.11ax HE20	44	5220	MCS0	Full	-
Mode 12	U-NII-1	5.15-5.25	1+2	802.11ax HE20	48	5240	MCS0	Full	-
Mode 13	U-NII-2A	5.25-5.35	1+2	802.11ax HE20	52	5260	MCS0	Full	-
Mode 14	U-NII-2A	5.25-5.35	1+2	802.11ax HE20	60	5300	MCS0	Full	-
Mode 15	U-NII-2A	5.25-5.35	1+2	802.11ax HE20	64	5320	MCS0	Full	-
Mode 16	U-NII-2C	5.47-5.725	1+2	802.11ax HE20	100	5500	MCS0	Full	-
Mode 17	U-NII-2C	5.47-5.725	1+2	802.11ax HE20	116	5580	MCS0	-	-
Mode 18	U-NII-2C	5.47-5.725	1+2	802.11ax HE20	140	5700	MCS0	Full	-
Mode 19	U-NII-1	5.15-5.25	1+2	802.11ax HE40	38	5190	MCS0	Full	-
Mode 20	U-NII-1	5.15-5.25	1+2	802.11ax HE40	46	5230	MCS0	Full	-
Mode 21	U-NII-2A	5.25-5.35	1+2	802.11ax HE40	54	5270	MCS0	Full	-
Mode 22	U-NII-2A	5.25-5.35	1+2	802.11ax HE40	62	5310	MCS0	Full	-
Mode 23	U-NII-2C	5.47-5.725	1+2	802.11ax HE40	102	5510	MCS0	Full	-
Mode 24	U-NII-2C	5.47-5.725	1+2	802.11ax HE40	110	5550	MCS0	Full	-
Mode 25	U-NII-2C	5.47-5.725	1+2	802.11ax HE40	134	5670	MCS0	Full	-
Mode 26	U-NII-1	5.15-5.25	1+2	802.11ax HE80	42	5210	MCS0	Full	-
Mode 27	U-NII-2A	5.25-5.35	1+2	802.11ax HE80	58	5290	MCS0	Full	-
Mode 28	U-NII-2C	5.47-5.725	1+2	802.11ax HE80	106	5530	MCS0	Full	-
Mode 30	U-NII-2A	5.25-5.35	1+2	802.11ax HE160	50	5250	MCS0	Full	-
Mode 45	U-NII-1	5.15-5.25	1+2	802.11ax HE20	36	5180	MCS0	26/0	-
Mode 46	U-NII-1	5.15-5.25	1+2	802.11ax HE20	36	5180	MCS0	52/37	-
Mode 47	U-NII-1	5.15-5.25	1+2	802.11ax HE20	36	5180	MCS0	106/53	-
Mode 48	U-NII-2A	5.25-5.35	1+2	802.11ax HE20	64	5320	MCS0	26/8	-
Mode 49	U-NII-2A	5.25-5.35	1+2	802.11ax HE20	64	5320	MCS0	52/40	-
Mode 50	U-NII-2A	5.25-5.35	1+2	802.11ax HE20	64	5320	MCS0	106/54	-
Mode 51	U-NII-2C	5.47-5.725	1+2	802.11ax HE20	100	5500	MCS0	26/0	-



Mode 52	U-NII-2C	5.47-5.725	1+2	802.11ax HE20	100	5500	MCS0	52/37	-
Mode 53	U-NII-2C	5.47-5.725	1+2	802.11ax HE20	100	5500	MCS0	106/53	-
Mode 54	U-NII-2C	5.47-5.725	1+2	802.11ax HE20	140	5700	MCS0	26/8	-
Mode 55	U-NII-2C	5.47-5.725	1+2	802.11ax HE20	140	5700	MCS0	52/40	-
Mode 56	U-NII-2C	5.47-5.725	1+2	802.11ax HE20	140	5700	MCS0	106/54	-
Mode 32	U-NII-3	5.725-5.85	1+2	802.11a	149	5745	6Mbps	-	-
Mode 33	U-NII-3	5.725-5.85	1+2	802.11a	157	5785	6Mbps	-	-
Mode 34	U-NII-3	5.725-5.85	1+2	802.11a	165	5825	6Mbps	-	-
Mode 35	U-NII-3	5.725-5.85	1+2	802.11ax HE20	149	5745	MCS0	Full	-
Mode 36	U-NII-3	5.725-5.85	1+2	802.11ax HE20	157	5785	MCS0	-	-
Mode 37	U-NII-3	5.725-5.85	1+2	802.11ax HE20	165	5825	MCS0	Full	-
Mode 38	U-NII-3	5.725-5.85	1+2	802.11ax HE40	151	5755	MCS0	Full	-
Mode 39	U-NII-3	5.725-5.85	1+2	802.11ax HE40	159	5795	MCS0	Full	-
Mode 40	U-NII-3	5.725-5.85	1+2	802.11ax HE80	155	5775	MCS0	Full	-
Mode 60	U-NII-3	5.725-5.85	1+2	802.11ax HE20	149	5745	MCS0	26/0	-
Mode 61	U-NII-3	5.725-5.85	1+2	802.11ax HE20	149	5745	MCS0	52/37	-
Mode 62	U-NII-3	5.725-5.85	1+2	802.11ax HE20	149	5745	MCS0	106/53	-
Mode 63	U-NII-3	5.725-5.85	1+2	802.11ax HE20	165	5825	MCS0	26/8	-
Mode 64	U-NII-3	5.725-5.85	1+2	802.11ax HE20	165	5825	MCS0	52/40	-
Mode 65	U-NII-3	5.725-5.85	1+2	802.11ax HE20	165	5825	MCS0	106/54	-
Mode 41	U-NII-2C	5.47-5.85	1+2	802.11a	144	5720	6Mbps	-	-
Mode 42	U-NII-2C	5.47-5.85	1+2	802.11ax HE20	144	5720	MCS0	Full	-
Mode 43	U-NII-2C	5.47-5.85	1+2	802.11ax HE40	142	5710	MCS0	-	-
Mode 44	U-NII-2C	5.47-5.85	1+2	802.11ax HE80	138	5690	MCS0	-	-

Note: For 802.11n/ac & 802.11ax mode, the RSE testing have assessed only 802.11ax HE20/40/80/160 by referring to the higher output power.



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.90	40.01	54.00	-13.99	H	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	58.99	68.20	-9.21	V	PEAK	Pass	Harmonic
2	802.11a	44	5072.38	39.14	54.00	-14.86	H	AVERAGE	Pass	Band Edge
2	802.11a	44	10440.00	62.63	68.20	-5.57	H	PEAK	Pass	Harmonic
3	802.11a	48	5393.56	37.50	54.00	-16.50	H	AVERAGE	Pass	Band Edge
3	802.11a	48	10480.00	63.25	68.20	-4.95	V	PEAK	Pass	Harmonic
4	802.11a	52	5105.60	39.45	54.00	-14.55	H	AVERAGE	Pass	Band Edge
4	802.11a	52	10520.00	63.38	68.20	-4.82	V	PEAK	Pass	Harmonic
5	802.11a	60	5147.00	39.04	54.00	-14.96	H	AVERAGE	Pass	Band Edge
5	802.11a	60	10600.00	52.50	54.00	-1.50	V	AVERAGE	Pass	Harmonic
6	802.11a	64	5350.00	40.62	54.00	-13.38	H	AVERAGE	Pass	Band Edge
6	802.11a	64	10640.00	53.12	54.00	-0.88	V	AVERAGE	Pass	Harmonic
7	802.11a	100	5351.12	40.73	54.00	-13.27	H	AVERAGE	Pass	Band Edge
7	802.11a	100	11000.00	52.14	54.00	-1.86	V	AVERAGE	Pass	Harmonic
8	802.11a	116	5425.84	41.08	54.00	-12.92	H	AVERAGE	Pass	Band Edge
8	802.11a	116	11160.00	43.25	54.00	-10.75	V	AVERAGE	Pass	Harmonic
9	802.11a	140	5728.60	51.39	68.20	-16.81	H	PEAK	Pass	Band Edge
9	802.11a	140	9120.00	47.33	74.00	-26.67	V	PEAK	Pass	Harmonic
10	802.11ax HE20	36	5150.00	40.75	54.00	-13.25	H	AVERAGE	Pass	Band Edge
10	802.11ax HE20	36	10360.00	60.77	68.20	-7.43	V	PEAK	Pass	Harmonic
11	802.11ax HE20	44	5069.08	39.85	54.00	-14.15	H	AVERAGE	Pass	Band Edge
11	802.11ax HE20	44	10440.00	63.95	68.20	-4.25	H	PEAK	Pass	Harmonic
12	802.11ax HE20	48	5393.56	38.12	54.00	-15.88	H	AVERAGE	Pass	Band Edge
12	802.11ax HE20	48	10480.00	65.76	68.20	-2.44	H	PEAK	Pass	Harmonic
13	802.11ax HE20	52	5108.48	39.07	54.00	-14.93	H	AVERAGE	Pass	Band Edge
13	802.11ax HE20	52	10520.00	66.10	68.20	-2.10	H	PEAK	Pass	Harmonic
14	802.11ax HE20	60	5145.80	40.01	54.00	-13.99	H	AVERAGE	Pass	Band Edge
14	802.11ax HE20	60	10600.00	52.92	54.00	-1.08	V	AVERAGE	Pass	Harmonic
15	802.11ax HE20	64	5350.00	41.71	54.00	-12.29	H	AVERAGE	Pass	Band Edge
15	802.11ax HE20	64	10640.00	52.44	54.00	-1.56	V	AVERAGE	Pass	Harmonic
16	802.11ax HE20	100	5350.00	40.99	54.00	-13.01	H	AVERAGE	Pass	Band Edge
16	802.11ax HE20	100	11000.00	50.18	54.00	-3.82	V	AVERAGE	Pass	Harmonic
17	802.11ax HE20	116	5425.84	41.22	54.00	-12.78	H	AVERAGE	Pass	Band Edge
17	802.11ax HE20	116	11160.00	43.04	54.00	-10.96	V	AVERAGE	Pass	Harmonic
18	802.11ax HE20	140	5738.60	50.21	68.20	-17.99	V	PEAK	Pass	Band Edge
18	802.11ax HE20	140	9120.00	50.86	74.00	-23.14	H	PEAK	Pass	Harmonic
19	802.11ax HE40	38	5149.92	47.84	54.00	-6.16	H	AVERAGE	Pass	Band Edge
19	802.11ax HE40	38	10380.00	57.47	68.20	-10.73	H	PEAK	Pass	Harmonic
20	802.11ax HE40	46	5383.62	41.00	54.00	-13.00	H	AVERAGE	Pass	Band Edge
20	802.11ax HE40	46	10460.00	60.31	68.20	-7.89	V	PEAK	Pass	Harmonic
21	802.11ax HE40	54	5351.32	39.57	54.00	-14.43	H	AVERAGE	Pass	Band Edge
21	802.11ax HE40	54	10540.00	60.16	68.20	-8.04	V	PEAK	Pass	Harmonic
22	802.11ax HE40	62	5350.40	48.25	54.00	-5.75	H	AVERAGE	Pass	Band Edge







22	802.11ax HE40	62	10620.00	52.57	54.00	-1.43	V	AVERAGE	Pass	Harmonic
23	802.11ax HE40	102	5459.92	43.82	54.00	-10.18	H	AVERAGE	Pass	Band Edge
23	802.11ax HE40	102	11020.00	43.86	54.00	-10.14	V	AVERAGE	Pass	Harmonic
24	802.11ax HE40	110	5396.20	41.41	54.00	-12.59	H	AVERAGE	Pass	Band Edge
24	802.11ax HE40	110	8880.00	54.79	68.20	-13.41	H	PEAK	Pass	Harmonic
25	802.11ax HE40	134	5458.96	37.20	54.00	-16.80	H	AVERAGE	Pass	Band Edge
25	802.11ax HE40	134	9072.00	50.65	74.00	-23.35	V	PEAK	Pass	Harmonic
26	802.11ax HE80	42	5146.40	44.48	54.00	-9.52	H	AVERAGE	Pass	Band Edge
26	802.11ax HE80	42	7815.00	51.22	68.20	-16.98	V	PEAK	Pass	Harmonic
27	802.11ax HE80	58	5354.40	44.63	54.00	-9.37	V	AVERAGE	Pass	Band Edge
27	802.11ax HE80	58	8464.00	47.89	54.00	-6.11	V	AVERAGE	Pass	Harmonic
28	802.11ax HE80	106	5459.76	41.54	54.00	-12.46	H	AVERAGE	Pass	Band Edge
28	802.11ax HE80	106	8848.00	52.78	68.20	-15.42	V	PEAK	Pass	Harmonic
30	802.11ax HE160	50	5379.99	46.16	54.00	-7.84	H	AVERAGE	Pass	Band Edge
30	802.11ax HE160	50	7875.00	52.21	68.20	-15.99	V	PEAK	Pass	Harmonic
45	802.11ax HE20	36	5138.00	42.77	54.00	-11.23	V	AVERAGE	Pass	Band Edge
45	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
46	802.11ax HE20	36	5143.80	47.73	54.00	-6.27	H	AVERAGE	Pass	Band Edge
46	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
47	802.11ax HE20	36	5150.00	47.70	54.00	-6.30	V	AVERAGE	Pass	Band Edge
47	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
48	802.11ax HE20	64	5362.60	48.06	54.00	-5.94	H	AVERAGE	Pass	Band Edge
48	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
49	802.11ax HE20	64	5358.20	48.16	54.00	-5.84	H	AVERAGE	Pass	Band Edge
49	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
50	802.11ax HE20	64	5350.10	46.75	54.00	-7.25	H	AVERAGE	Pass	Band Edge
50	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
51	802.11ax HE20	100	5457.52	48.70	54.00	-5.30	H	AVERAGE	Pass	Band Edge
51	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
52	802.11ax HE20	100	5459.92	48.62	54.00	-5.38	H	AVERAGE	Pass	Band Edge
52	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
53	802.11ax HE20	100	5459.44	46.75	54.00	-7.25	H	AVERAGE	Pass	Band Edge
53	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
54	802.11ax HE20	140	5727.96	58.75	68.20	-9.45	V	PEAK	Pass	Band Edge
54	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
55	802.11ax HE20	140	5728.92	66.58	68.20	-1.62	V	PEAK	Pass	Band Edge
55	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
56	802.11ax HE20	140	5725.72	67.32	68.20	-0.88	H	PEAK	Pass	Band Edge
56	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
32	802.11a	149	5641.60	49.26	68.20	-18.94	V	PEAK	Pass	Band Edge
32	802.11a	149	9192.00	47.35	54.00	-6.65	V	AVERAGE	Pass	Harmonic
33	802.11a	157	5995.20	49.69	68.20	-18.51	V	PEAK	Pass	Band Edge
33	802.11a	157	11570.00	45.15	54.00	-8.85	V	AVERAGE	Pass	Harmonic
34	802.11a	165	5938.00	49.55	68.20	-18.65	V	PEAK	Pass	Band Edge
34	802.11a	165	9320.00	44.86	54.00	-9.14	V	AVERAGE	Pass	Harmonic
35	802.11ax HE20	149	5633.20	48.62	68.20	-19.58	H	PEAK	Pass	Band Edge
35	802.11ax HE20	149	9192.00	49.61	54.00	-4.39	V	AVERAGE	Pass	Harmonic



36	802.11ax HE20	157	5948.40	49.43	68.20	-18.77	V	PEAK	Pass	Band Edge
36	802.11ax HE20	157	11570.00	42.33	54.00	-11.67	V	AVERAGE	Pass	Harmonic
37	802.11ax HE20	165	5955.60	49.72	68.20	-18.48	V	PEAK	Pass	Band Edge
37	802.11ax HE20	165	9320.00	48.54	54.00	-5.46	V	AVERAGE	Pass	Harmonic
38	802.11ax HE40	151	5645.42	52.19	68.20	-16.01	H	PEAK	Pass	Band Edge
38	802.11ax HE40	151	9208.00	54.68	68.20	-13.52	H	PEAK	Pass	Harmonic
39	802.11ax HE40	159	5950.00	51.02	68.20	-17.18	V	PEAK	Pass	Band Edge
39	802.11ax HE40	159	9272.00	52.22	68.20	-15.98	H	PEAK	Pass	Harmonic
40	802.11ax HE80	155	5947.60	49.82	68.20	-18.38	V	PEAK	Pass	Band Edge
40	802.11ax HE80	155	9240.00	53.64	68.20	-14.56	H	PEAK	Pass	Harmonic
60	802.11ax HE20	149	5645.60	57.53	68.20	-10.67	H	PEAK	Pass	Band Edge
60	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
61	802.11ax HE20	149	5620.00	57.40	68.20	-10.80	V	PEAK	Pass	Band Edge
61	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
62	802.11ax HE20	149	5618.00	57.84	68.20	-10.36	V	PEAK	Pass	Band Edge
62	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
63	802.11ax HE20	165	5939.20	59.33	68.20	-8.87	V	PEAK	Pass	Band Edge
63	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
64	802.11ax HE20	165	5966.00	60.10	68.20	-8.10	V	PEAK	Pass	Band Edge
64	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
65	802.11ax HE20	165	5965.60	60.08	68.20	-8.12	V	PEAK	Pass	Band Edge
65	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
41	802.11a	144	-	-	-	-	-	-	-	Band Edge
41	802.11a	144	9152.00	49.98	54.00	-4.02	V	AVERAGE	Pass	Harmonic
42	802.11ax HE20	144	-	-	-	-	-	-	-	Band Edge
42	802.11ax HE20	144	9152.00	50.75	54.00	-3.25	V	AVERAGE	Pass	Harmonic
43	802.11ax HE40	142	-	-	-	-	-	-	-	Band Edge
43	802.11ax HE40	142	9136.00	49.49	54.00	-4.51	V	AVERAGE	Pass	Harmonic
44	802.11ax HE80	138	-	-	-	-	-	-	-	Band Edge
44	802.11ax HE80	138	9104.00	48.87	54.00	-5.13	V	AVERAGE	Pass	Harmonic

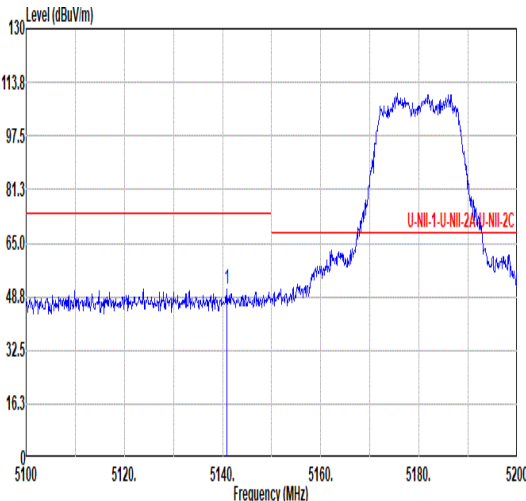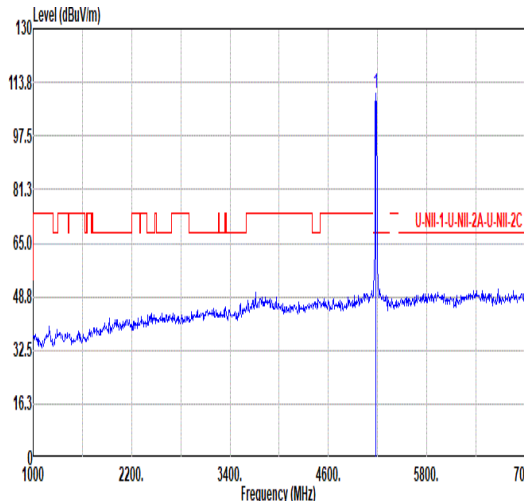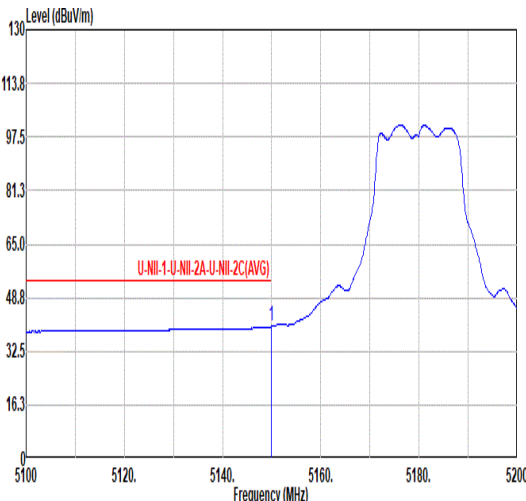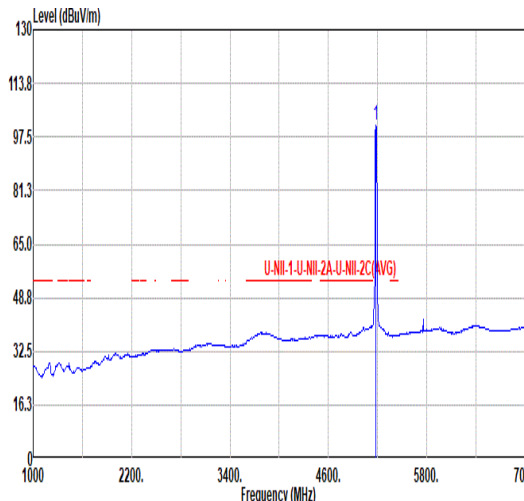

Mode	1																																																																																																	
	Band Edge																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																	
ANT	1+2																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5140.00</td><td>51.17</td><td>74.00</td><td>-22.83</td><td>43.40</td><td>34.10</td><td>10.64</td><td>36.97</td><td>0.00</td><td>303 298 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5140.00	51.17	74.00	-22.83	43.40	34.10	10.64	36.97	0.00	303 298 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>110.53</td><td>-----</td><td>-----</td><td>102.69</td><td>34.15</td><td>10.68</td><td>36.99</td><td>0.00</td><td>303 298 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	110.53	-----	-----	102.69	34.15	10.68	36.99	0.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5140.00	51.17	74.00	-22.83	43.40	34.10	10.64	36.97	0.00	303 298 PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5180.00	110.53	-----	-----	102.69	34.15	10.68	36.99	0.00	303 298 PEAK																																																																																								
Avg																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.90</td><td>40.01</td><td>54.00</td><td>-13.99</td><td>32.23</td><td>34.10</td><td>10.65</td><td>36.97</td><td>0.00</td><td>303 298 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.90	40.01	54.00	-13.99	32.23	34.10	10.65	36.97	0.00	303 298 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>101.24</td><td>-----</td><td>-----</td><td>93.39</td><td>34.16</td><td>10.69</td><td>37.00</td><td>0.00</td><td>303 298 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	101.24	-----	-----	93.39	34.16	10.69	37.00	0.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5149.90	40.01	54.00	-13.99	32.23	34.10	10.65	36.97	0.00	303 298 AVERAGE																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5180.00	101.24	-----	-----	93.39	34.16	10.69	37.00	0.00	303 298 AVERAGE																																																																																								