Appendix A

RF Test Data for 2.4GWIFI (Conducted Measurement)

Product Name: Dash camera

Test Model: S3

Environmental Conditions

Temperature:	23.8 ° C
Relative Humidity:	52.3%
ATM Pressure:	100.0 kPa
Test Engineer:	Jay Luo
Supervised by:	Nick Peng

A.1 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	9.013	>=0.5	Pass
NVNT	b	2437	Ant1	8.076	>=0.5	Pass
NVNT	b	2462	Ant1	9.009	>=0.5	Pass
NVNT	g	2412	Ant1	16.049	>=0.5	Pass
NVNT	g	2437	Ant1	16.322	>=0.5	Pass
NVNT	g	2462	Ant1	16.324	>=0.5	Pass
NVNT	n20	2412	Ant1	17.403	>=0.5	Pass
NVNT	n20	2437	Ant1	17.114	>=0.5	Pass
NVNT	n20	2462	Ant1	16.854	>=0.5	Pass

Test Graphs

-6dB Bandwidth NVNT b 2412MHz Ant1

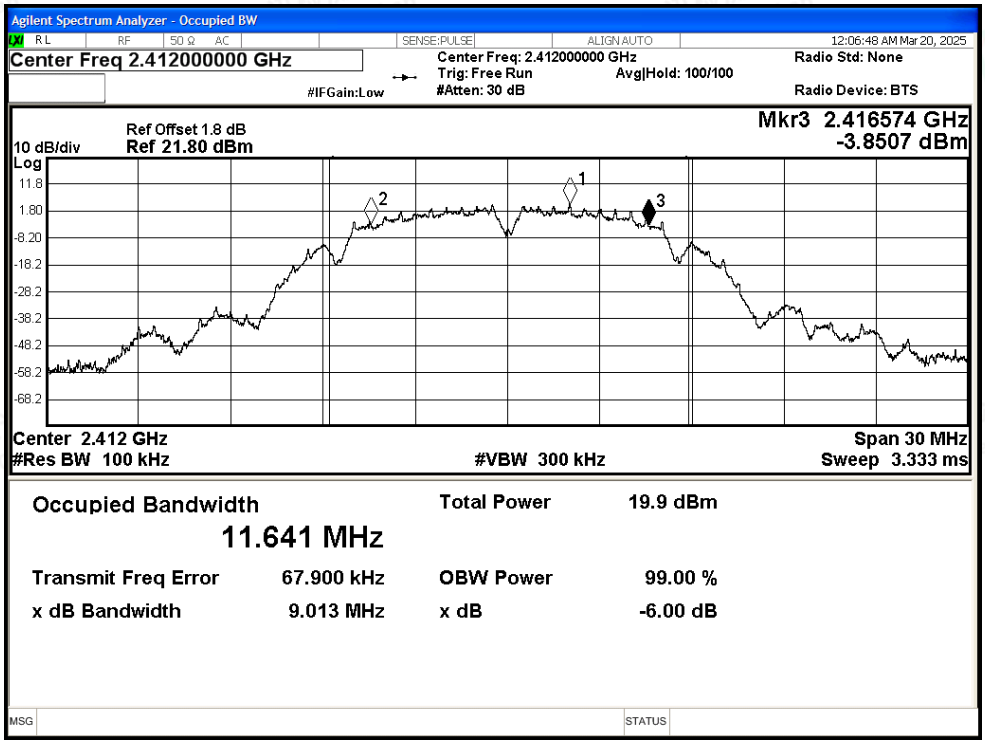

-6dB Bandwidth NVNT b 2437MHz Ant1

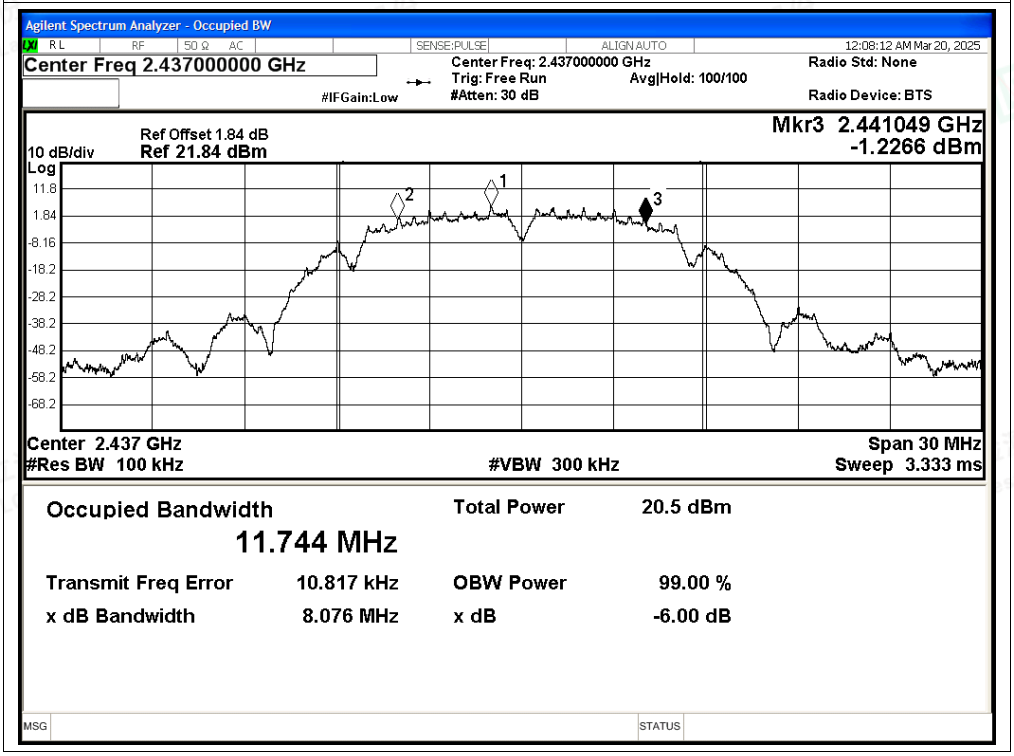

-6dB Bandwidth NVNT b 2462MHz Ant1

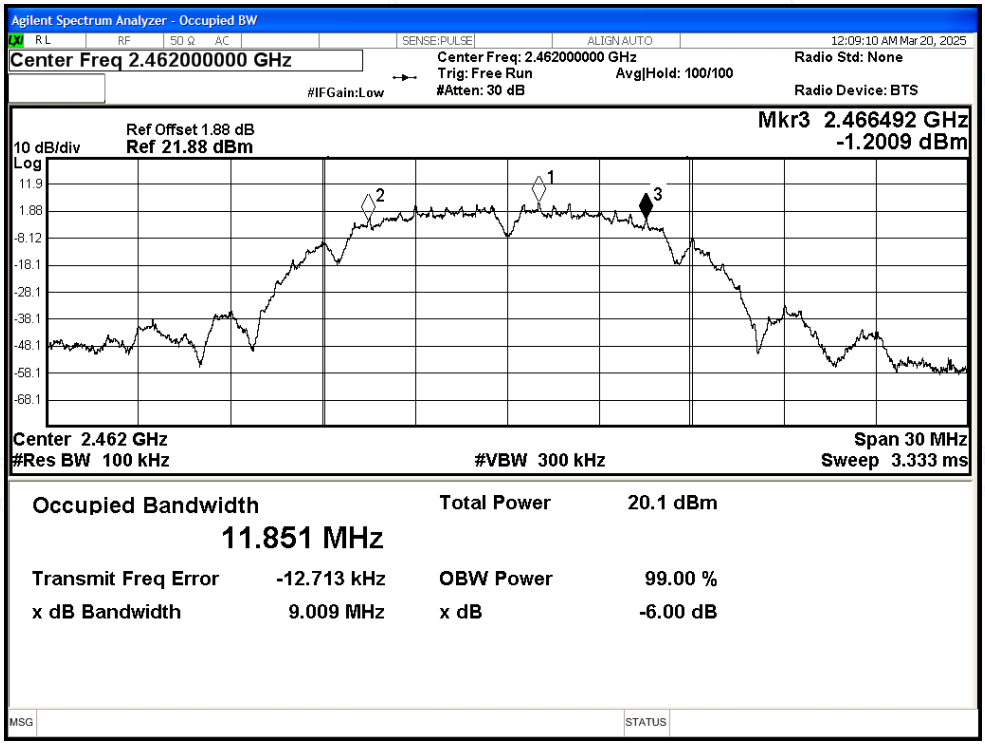

-6dB Bandwidth NVNT g 2412MHz Ant1

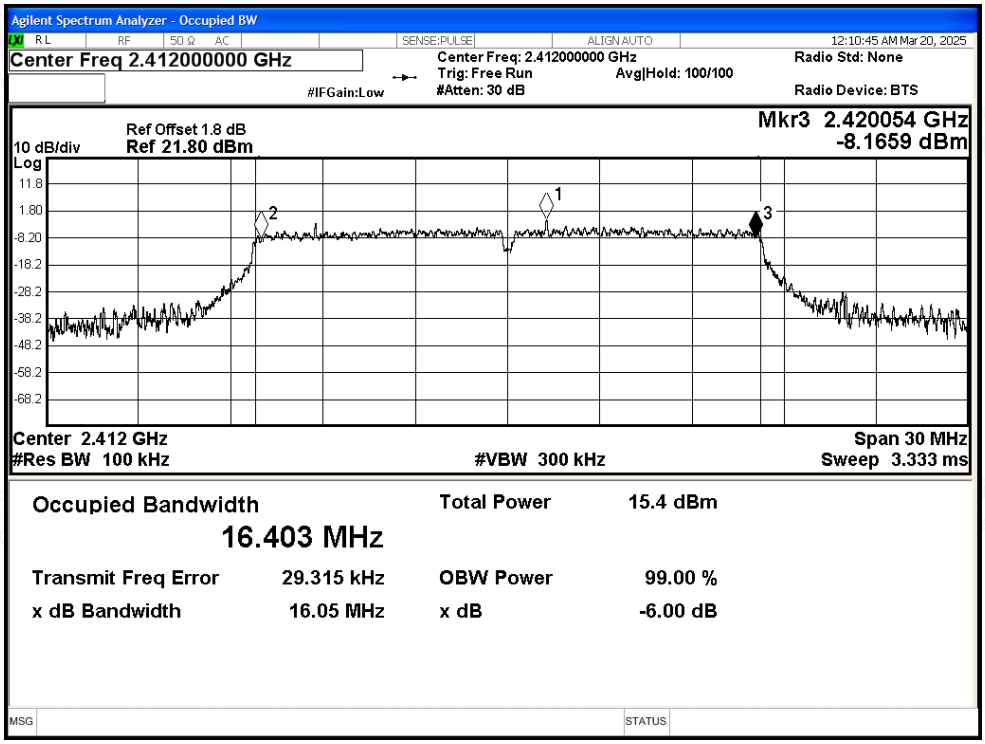

-6dB Bandwidth NVNT g 2437MHz Ant1

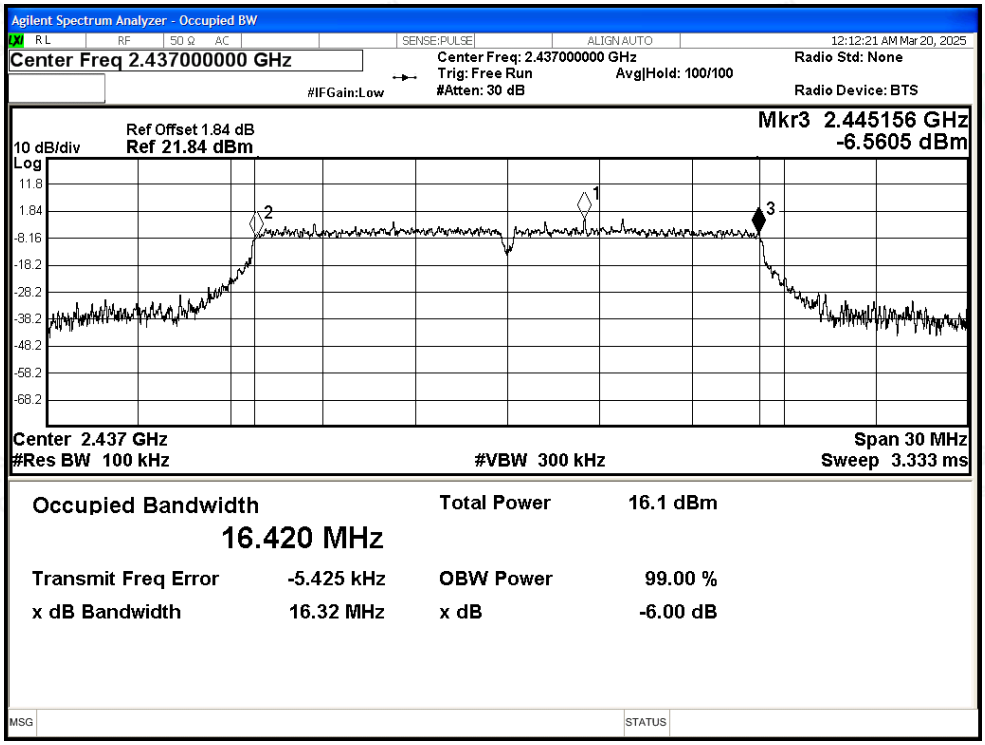

-6dB Bandwidth NVNT g 2462MHz Ant1

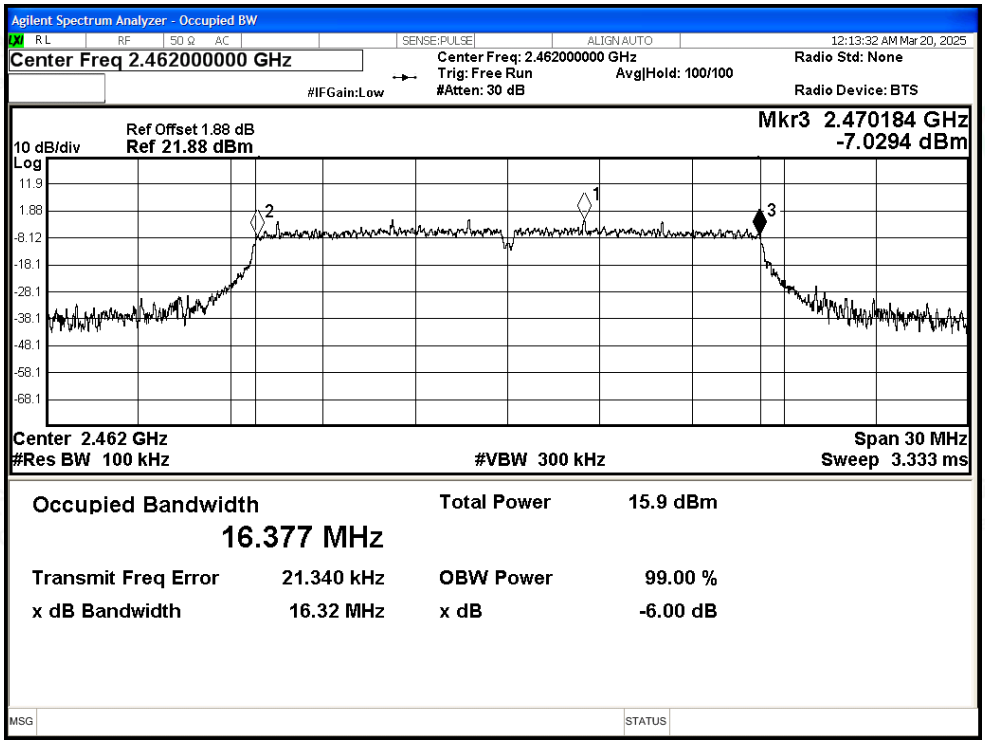

-6dB Bandwidth NVNT n20 2412MHz Ant1

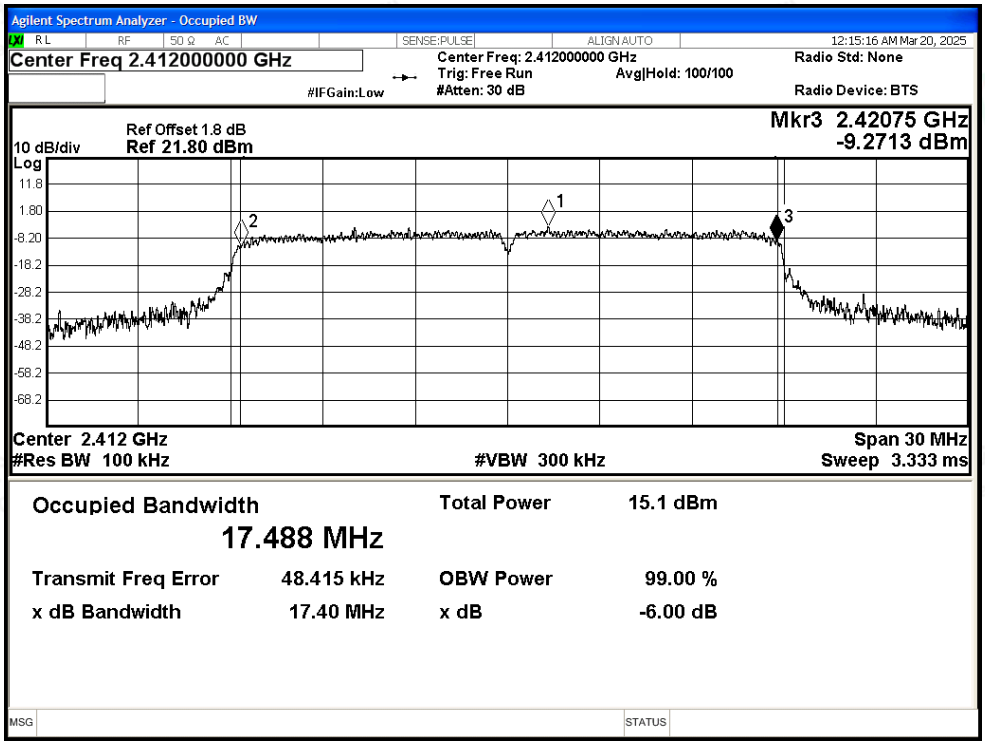

-6dB Bandwidth NVNT n20 2437MHz Ant1

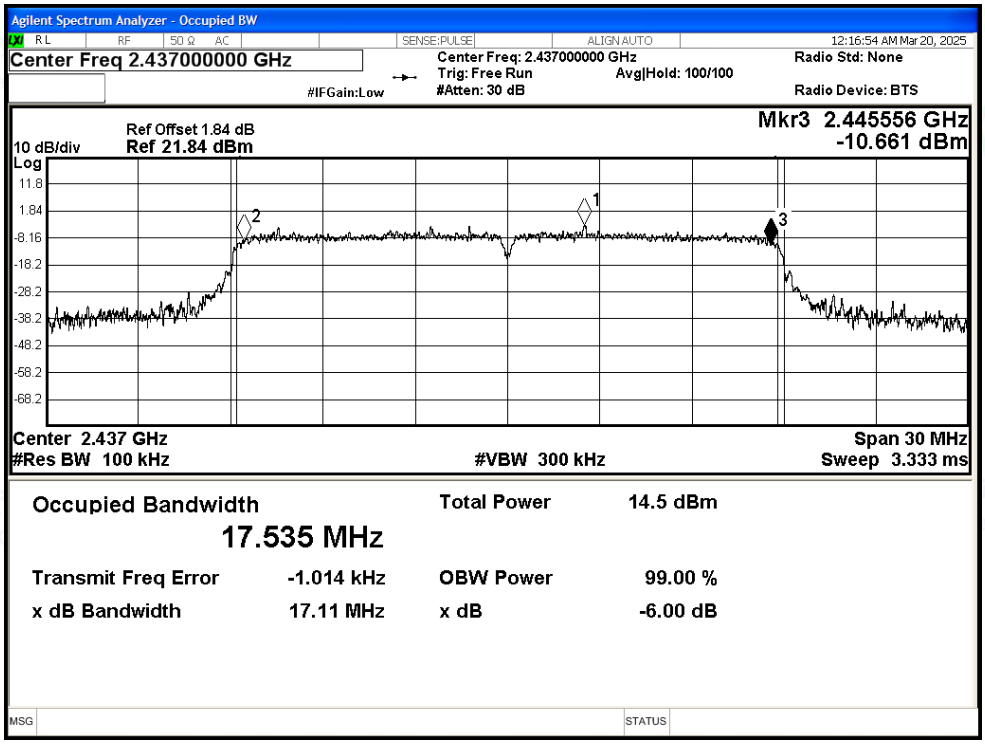

-6dB Bandwidth NVNT n20 2462MHz Ant1

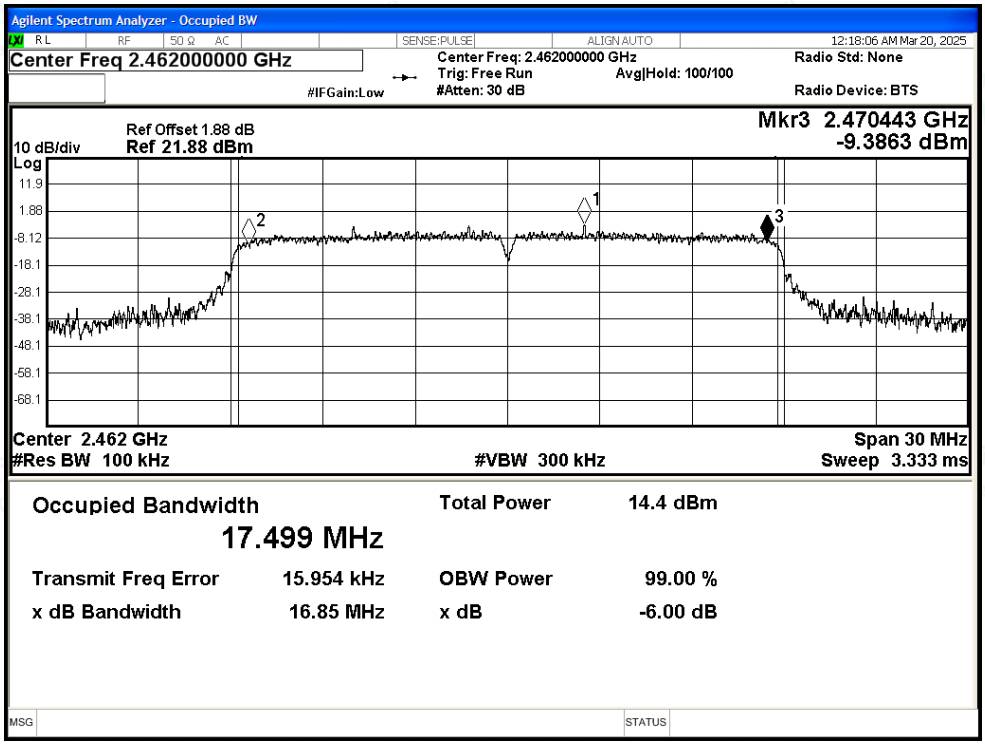

A.2 Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	14.96	30	Pass
NVNT	b	2437	Ant1	15.45	30	Pass
NVNT	b	2462	Ant1	15.14	30	Pass
NVNT	g	2412	Ant1	14.25	30	Pass
NVNT	g	2437	Ant1	14.93	30	Pass
NVNT	g	2462	Ant1	14.67	30	Pass
NVNT	n20	2412	Ant1	13.79	30	Pass
NVNT	n20	2437	Ant1	13.15	30	Pass
NVNT	n20	2462	Ant1	13.05	30	Pass

A.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-8.51	8	Pass
NVNT	b	2437	Ant1	-8.79	8	Pass
NVNT	b	2462	Ant1	-9.91	8	Pass
NVNT	g	2412	Ant1	-16.25	8	Pass
NVNT	g	2437	Ant1	-15.9	8	Pass
NVNT	g	2462	Ant1	-16.33	8	Pass
NVNT	n20	2412	Ant1	-17.02	8	Pass
NVNT	n20	2437	Ant1	-17.39	8	Pass
NVNT	n20	2462	Ant1	-17.01	8	Pass

Test Graphs

PSD NVNT b 2412MHz Ant1

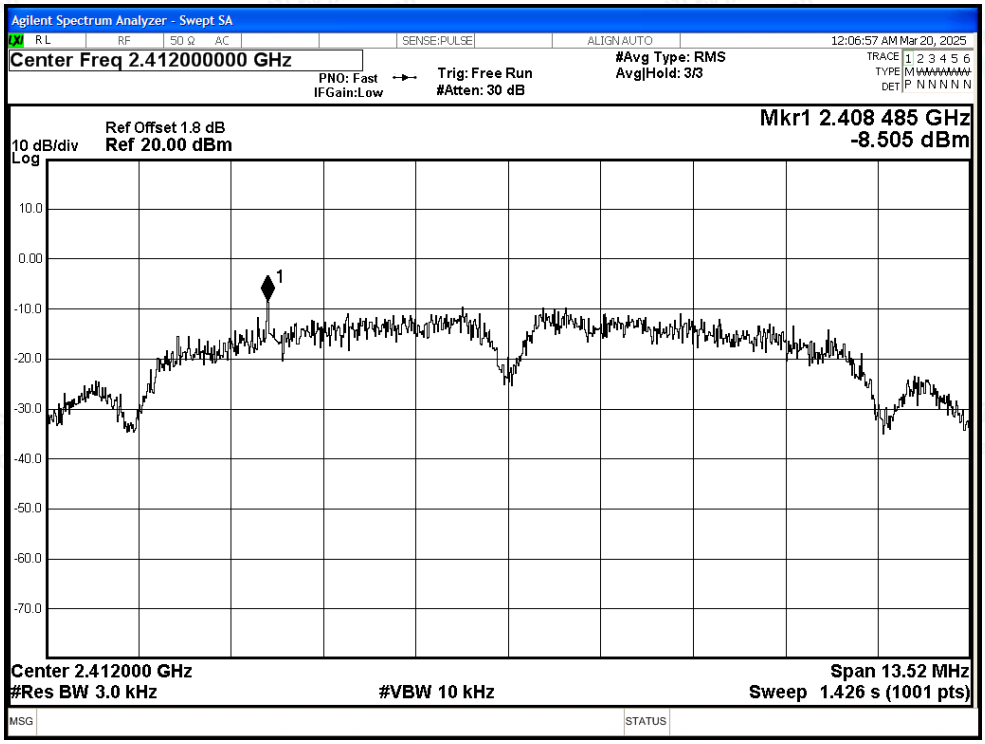

PSD NVNT b 2437MHz Ant1

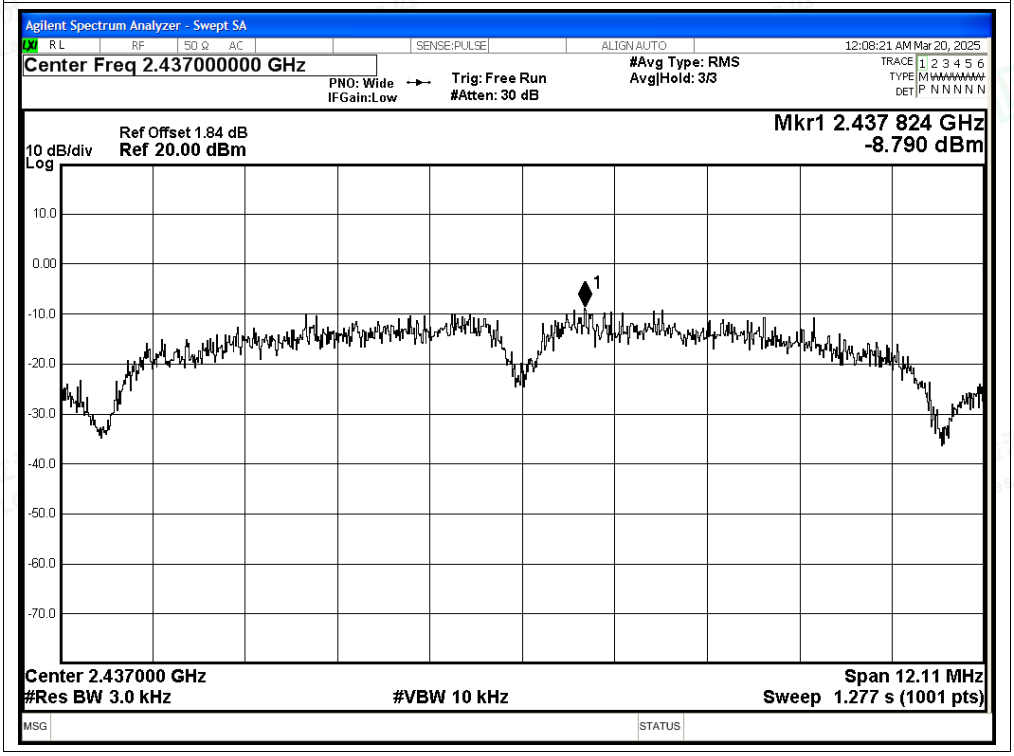

PSD NVNT b 2462MHz Ant1

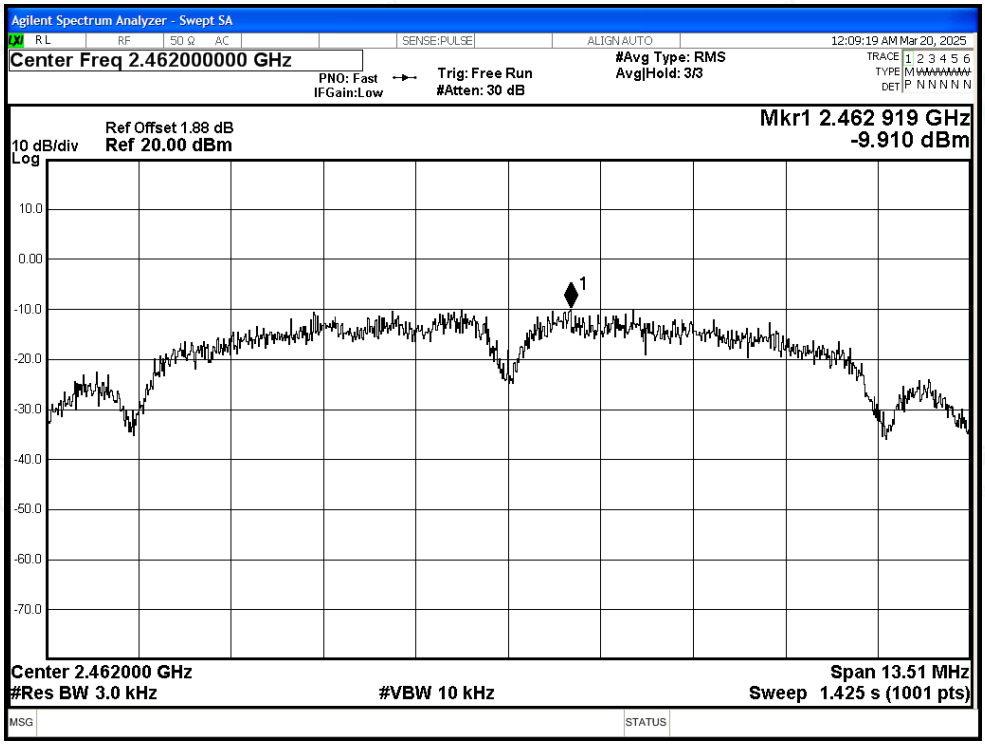

PSD NVNT g 2412MHz Ant1

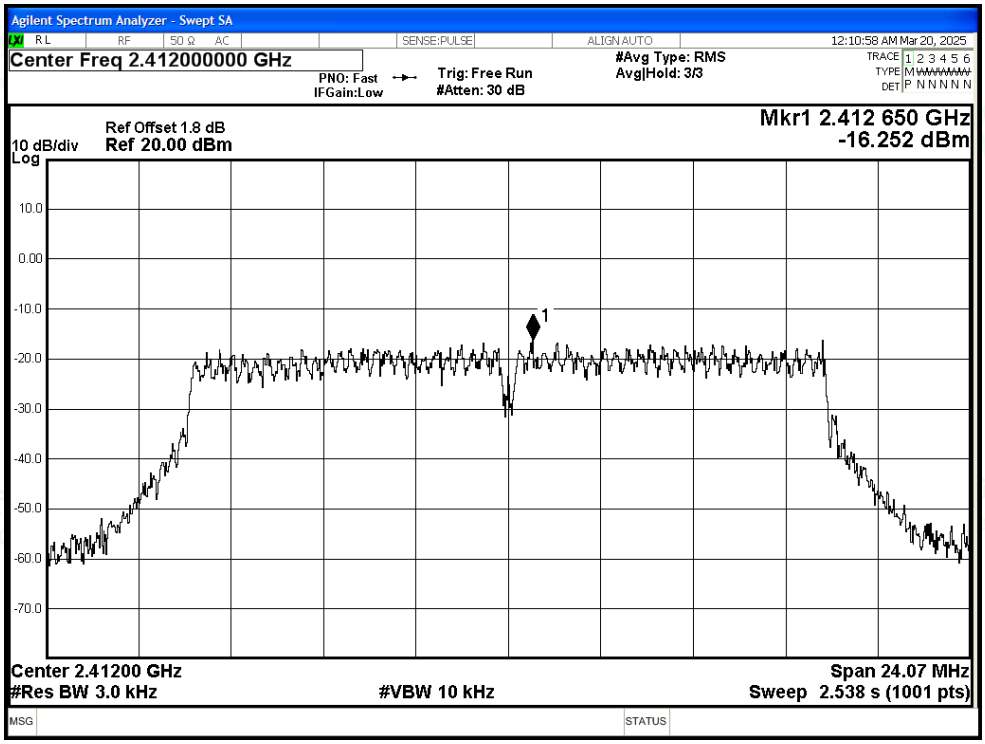

PSD NVNT g 2437MHz Ant1

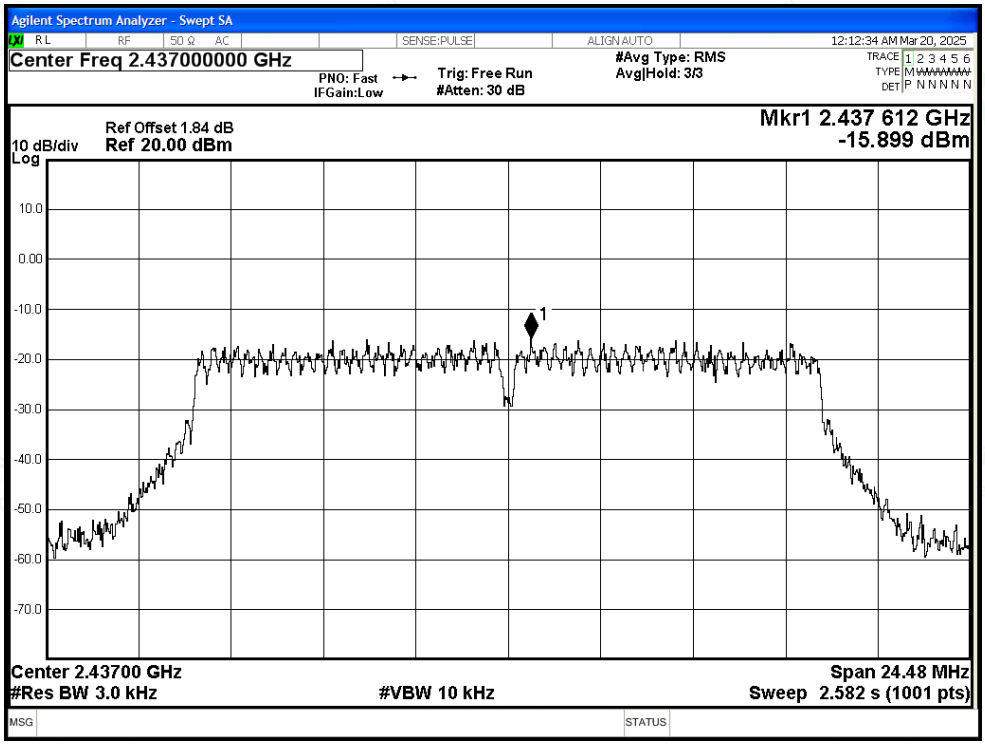

PSD NVNT g 2462MHz Ant1

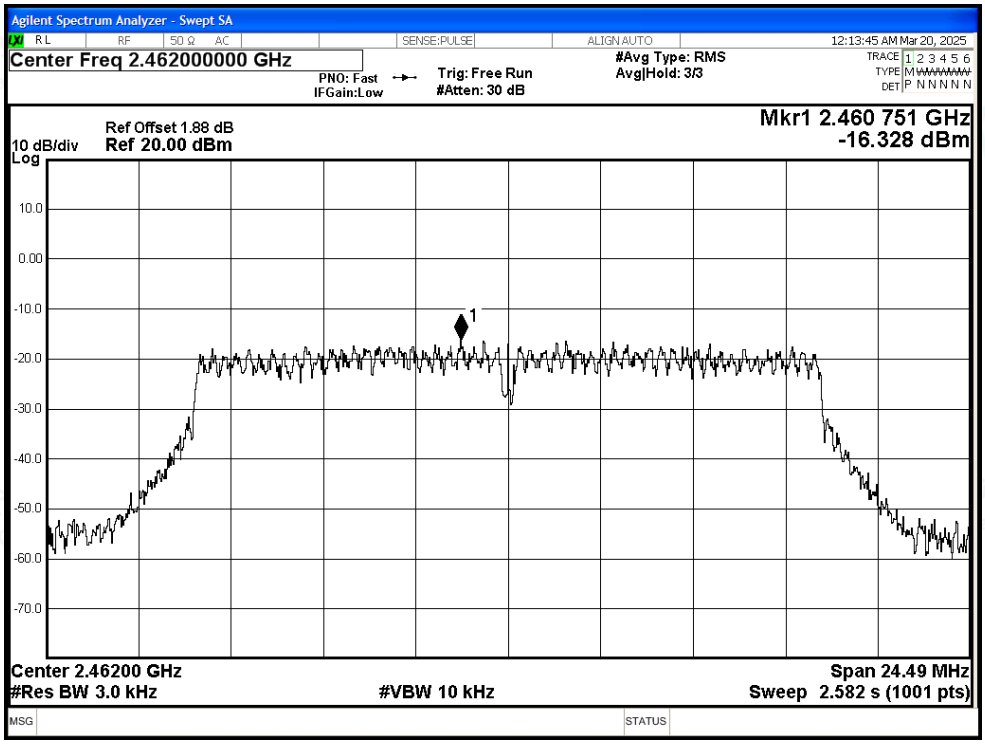

PSD NVNT n20 2412MHz Ant1

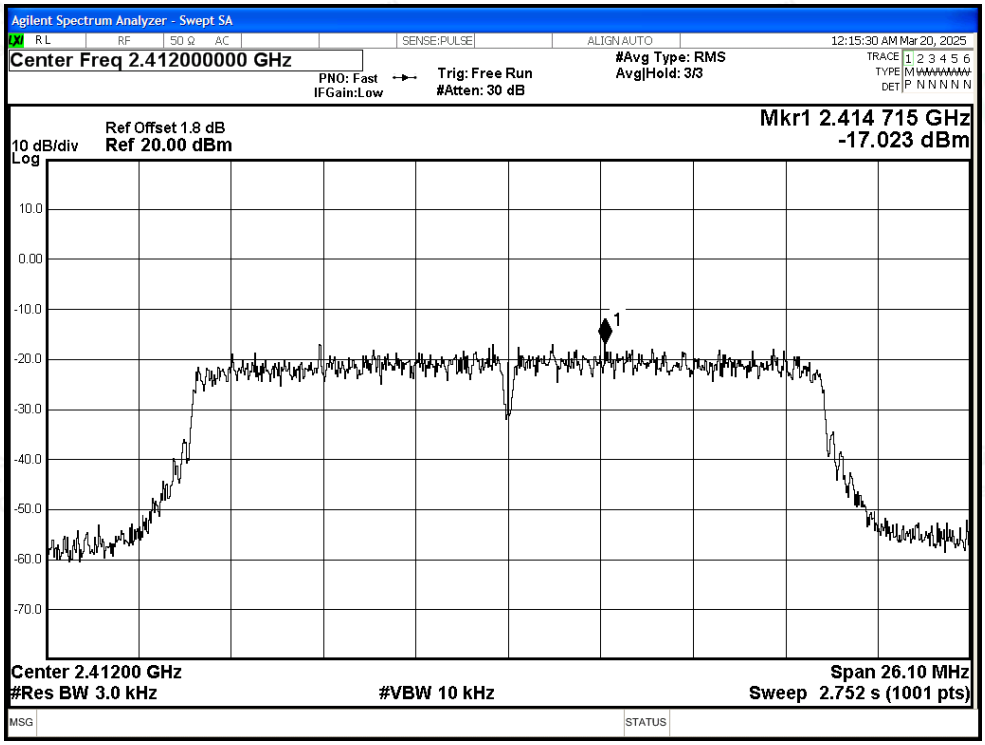

PSD NVNT n20 2437MHz Ant1

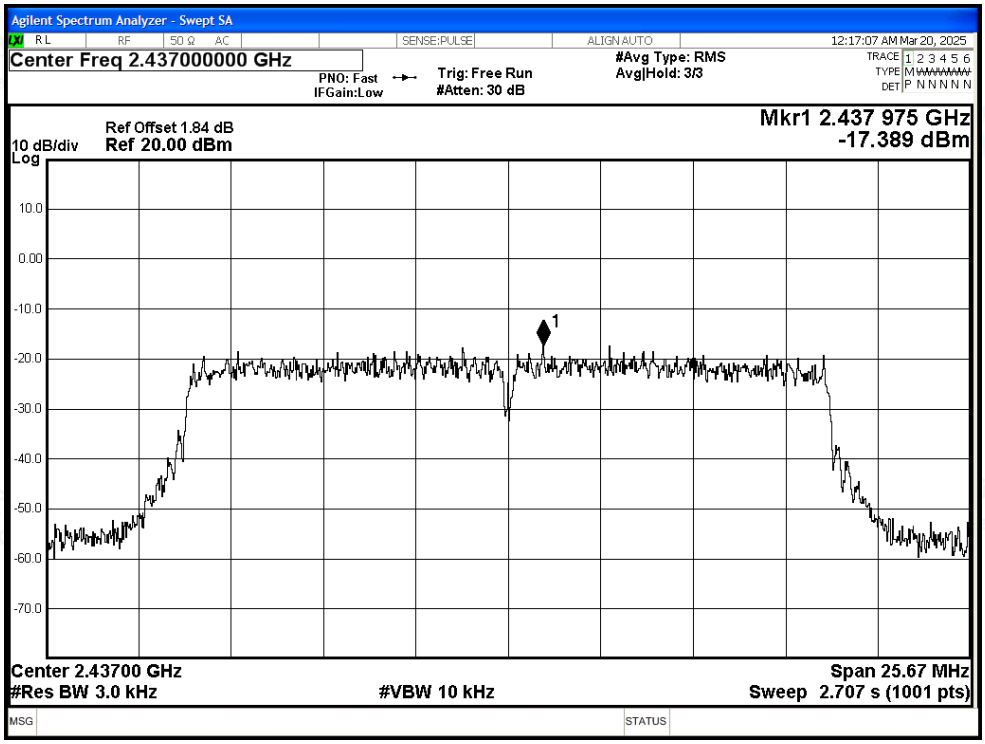

PSD NVNT n20 2462MHz Ant1

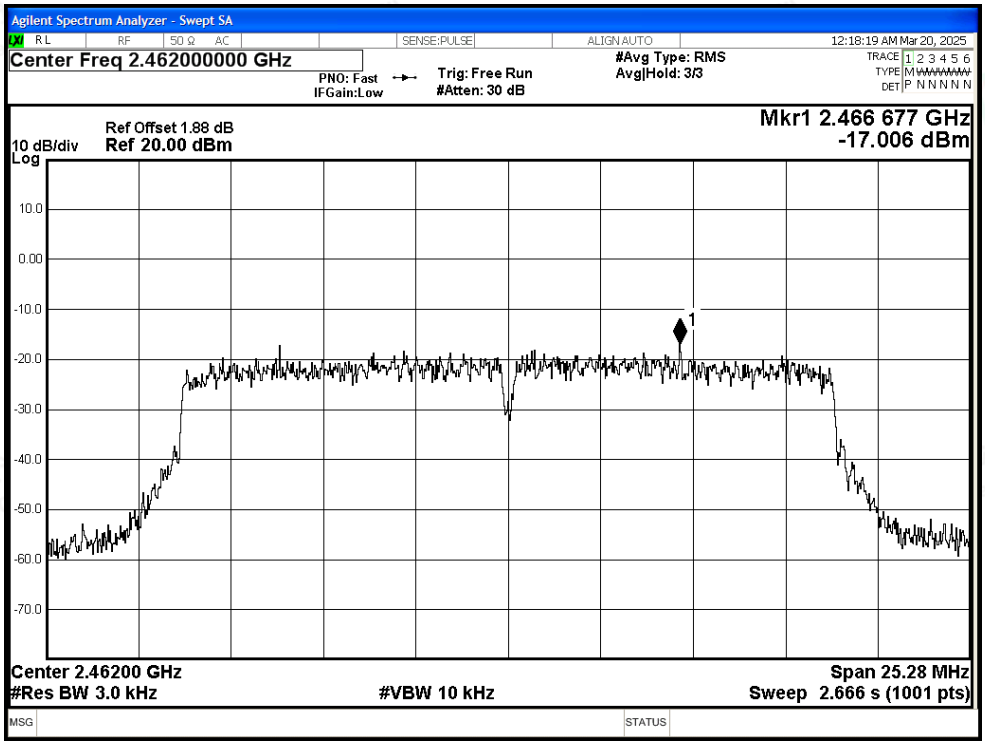

A.4 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-46.09	-20	Pass
NVNT	b	2462	Ant1	-59.87	-20	Pass
NVNT	g	2412	Ant1	-31.88	-20	Pass
NVNT	g	2462	Ant1	-42.8	-20	Pass
NVNT	n20	2412	Ant1	-29.92	-20	Pass
NVNT	n20	2462	Ant1	-40.87	-20	Pass

Test Graphs

Band Edge NVNT b 2412MHz Ant1 Ref

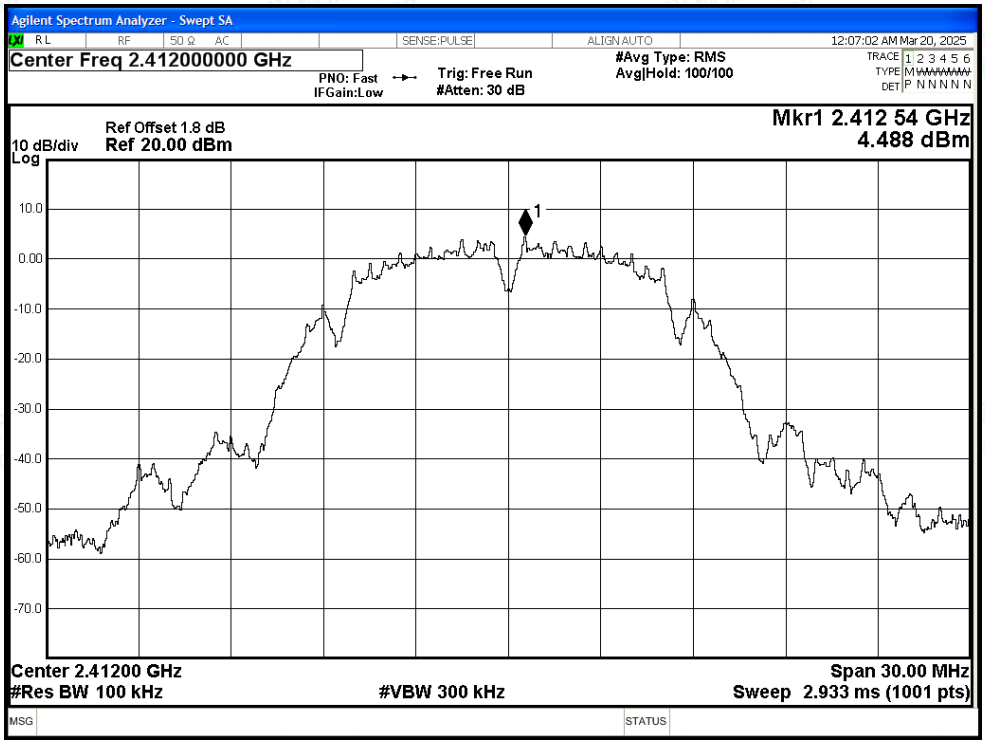

Band Edge NVNT b 2412MHz Ant1 Emission

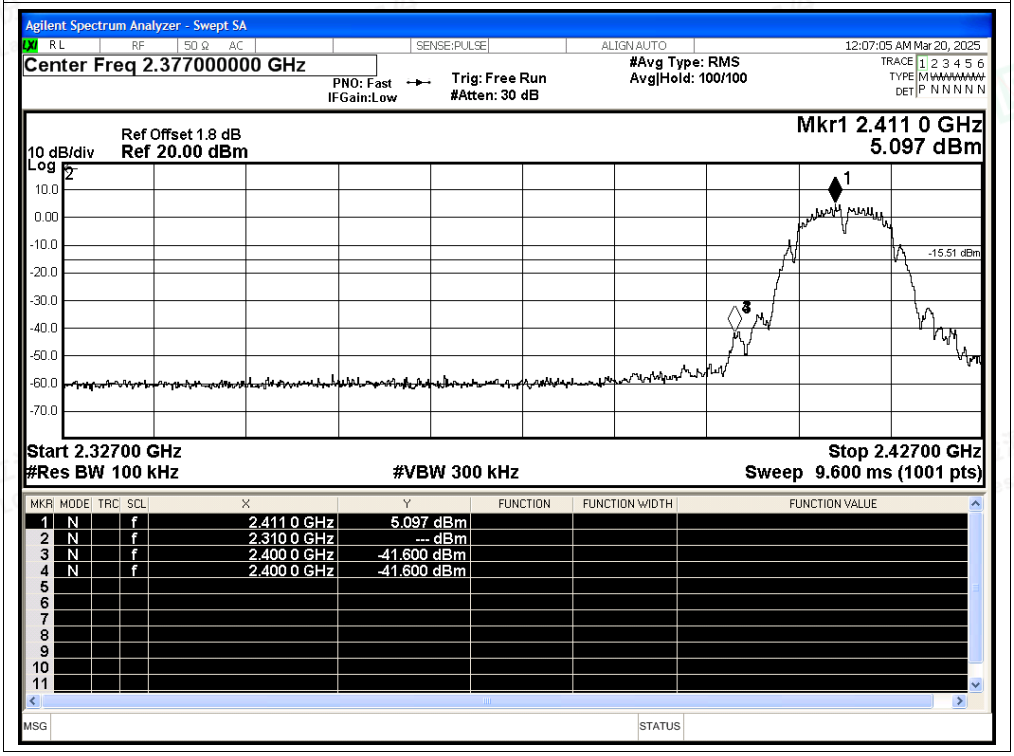

Band Edge NVNT b 2462MHz Ant1 Ref

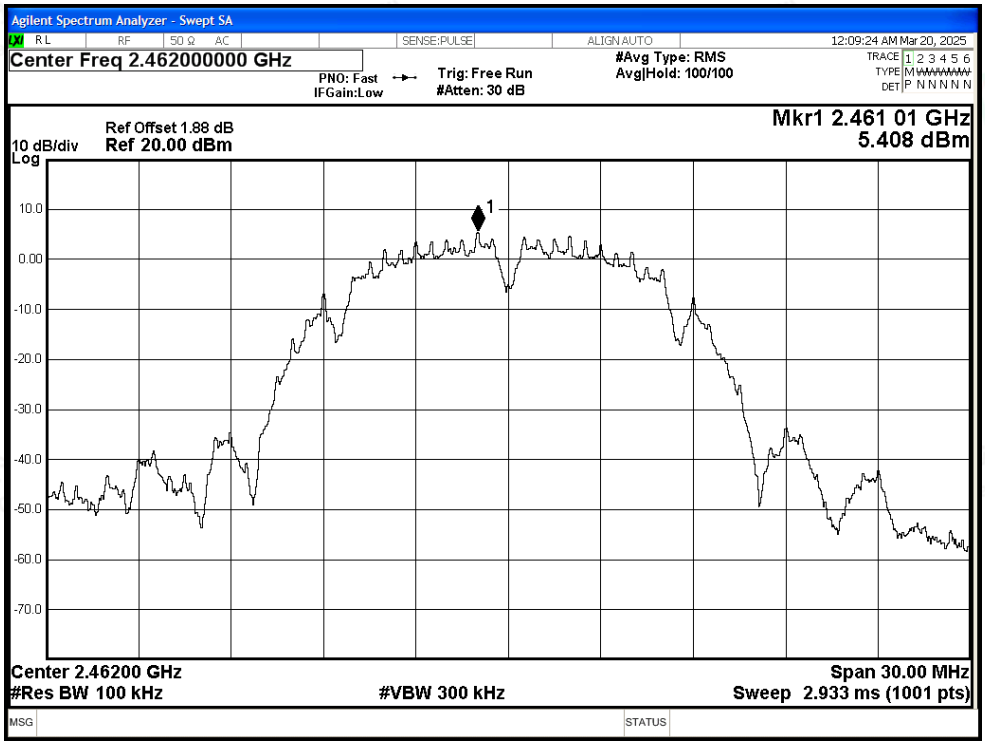

Band Edge NVNT b 2462MHz Ant1 Emission

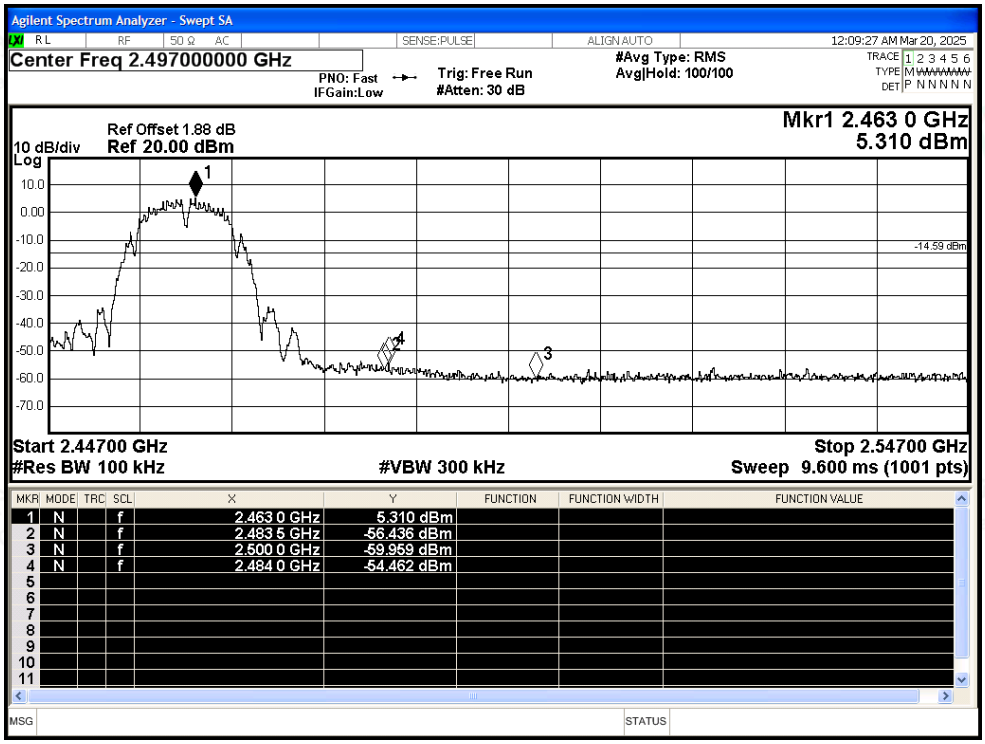

Band Edge NVNT g 2412MHz Ant1 Ref

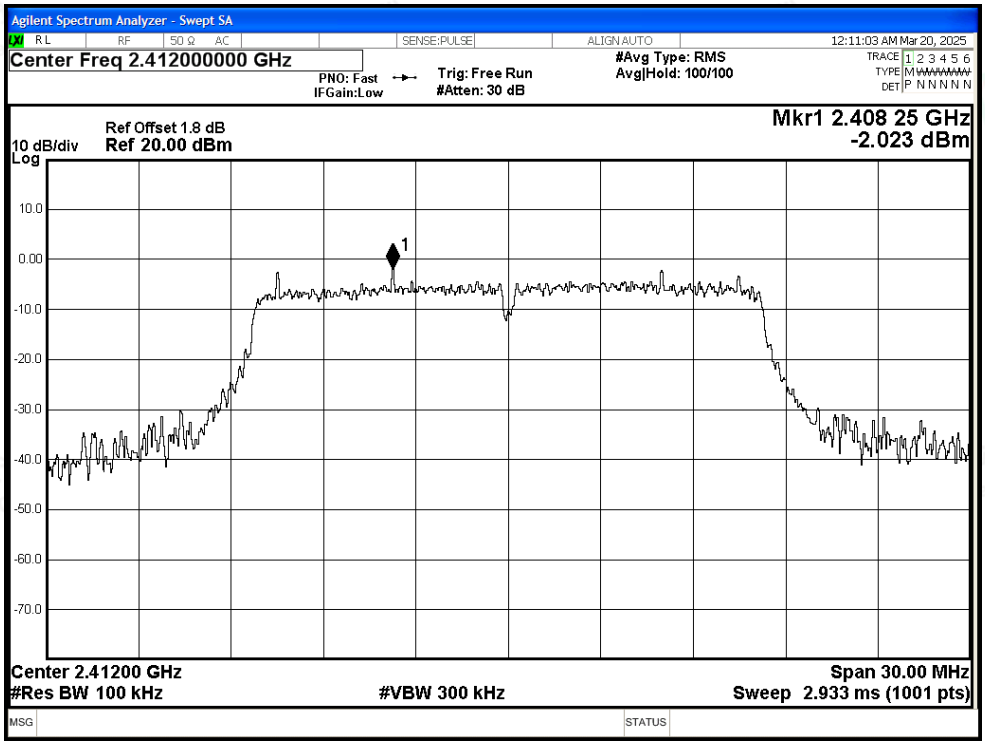

Band Edge NVNT g 2412MHz Ant1 Emission

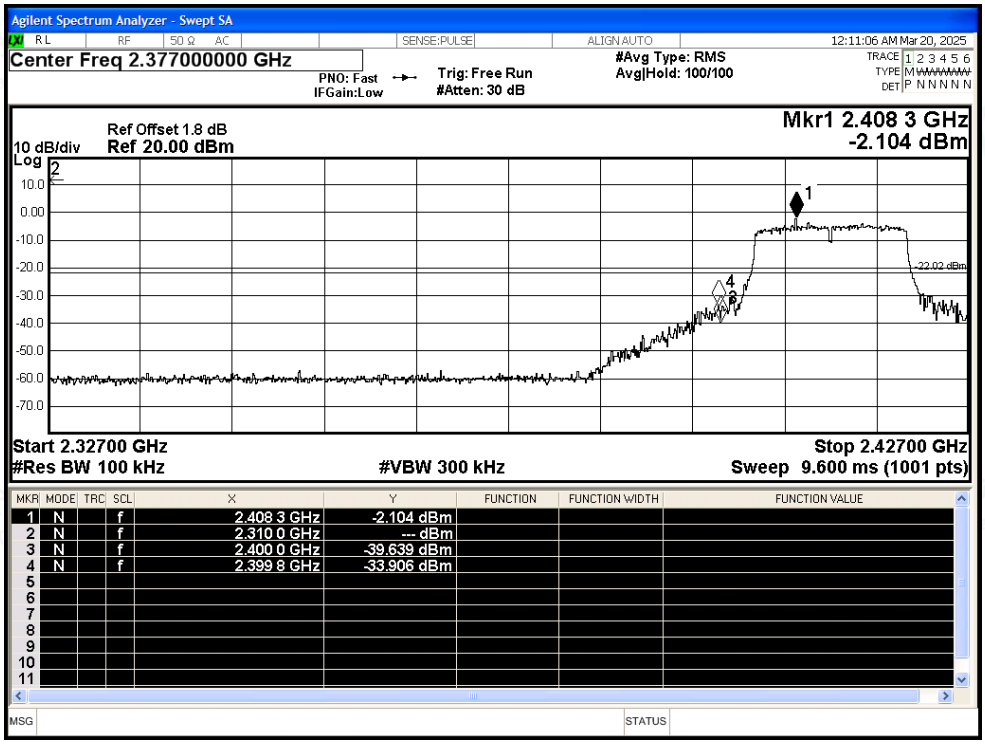

Band Edge NVNT g 2462MHz Ant1 Ref

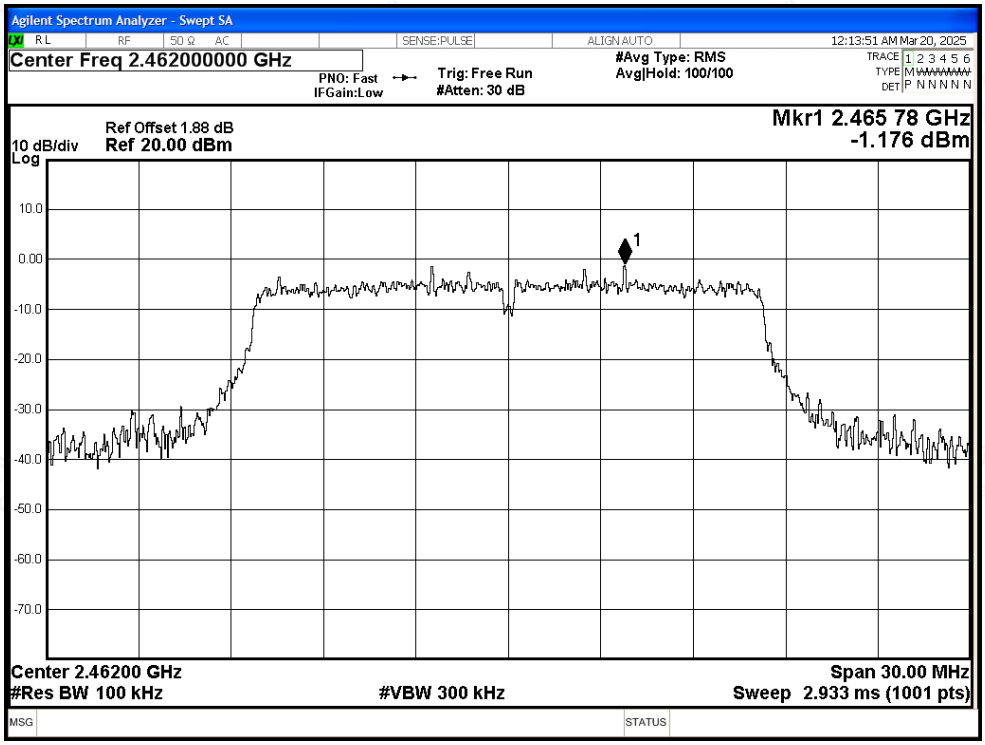

Band Edge NVNT g 2462MHz Ant1 Emission

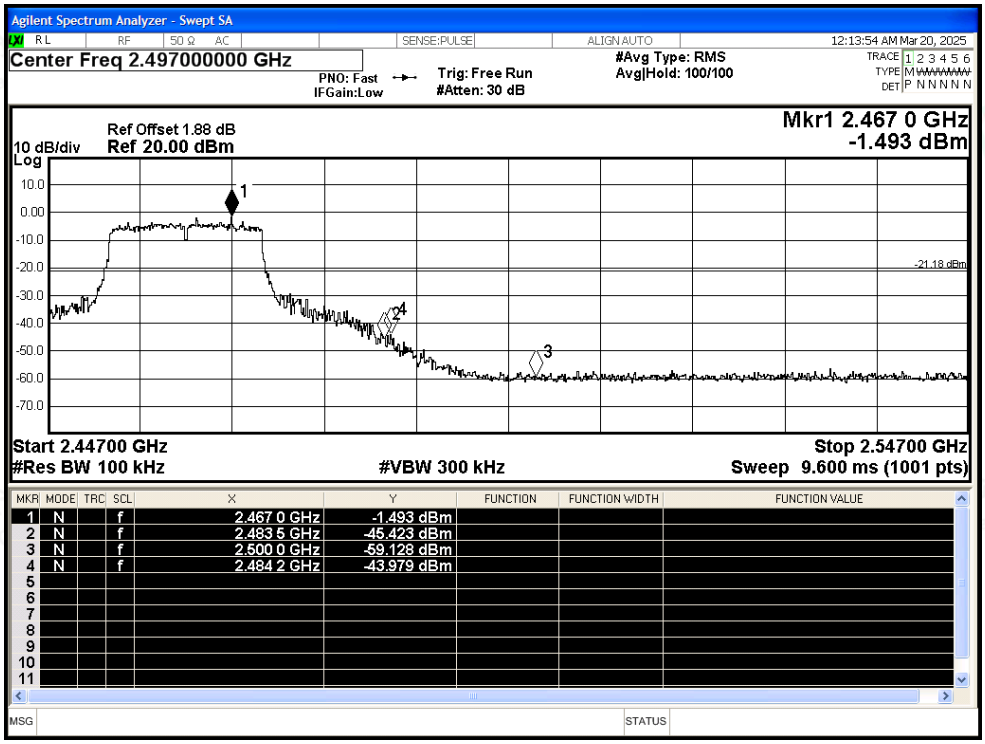

Band Edge NVNT n20 2412MHz Ant1 Ref

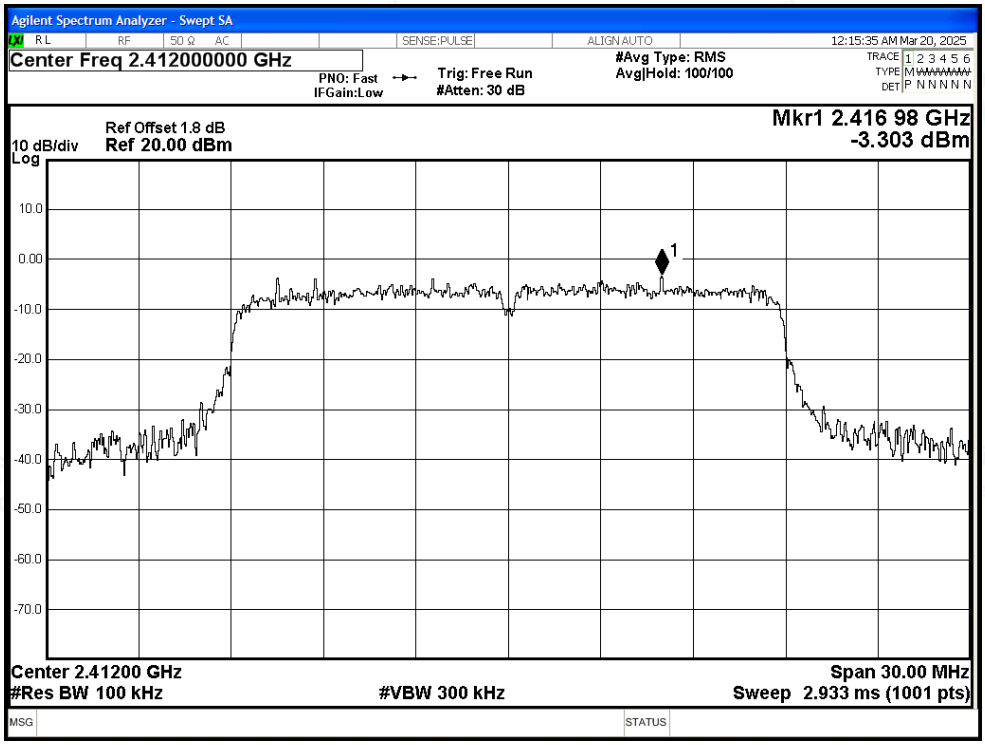

Band Edge NVNT n20 2412MHz Ant1 Emission

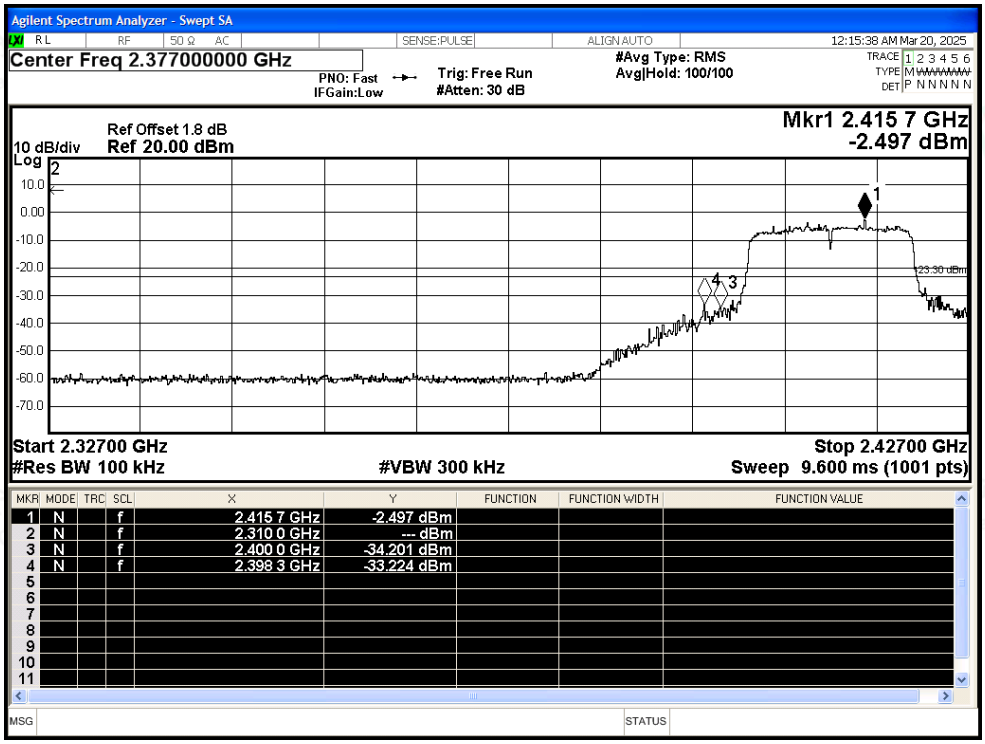

Band Edge NVNT n20 2462MHz Ant1 Ref

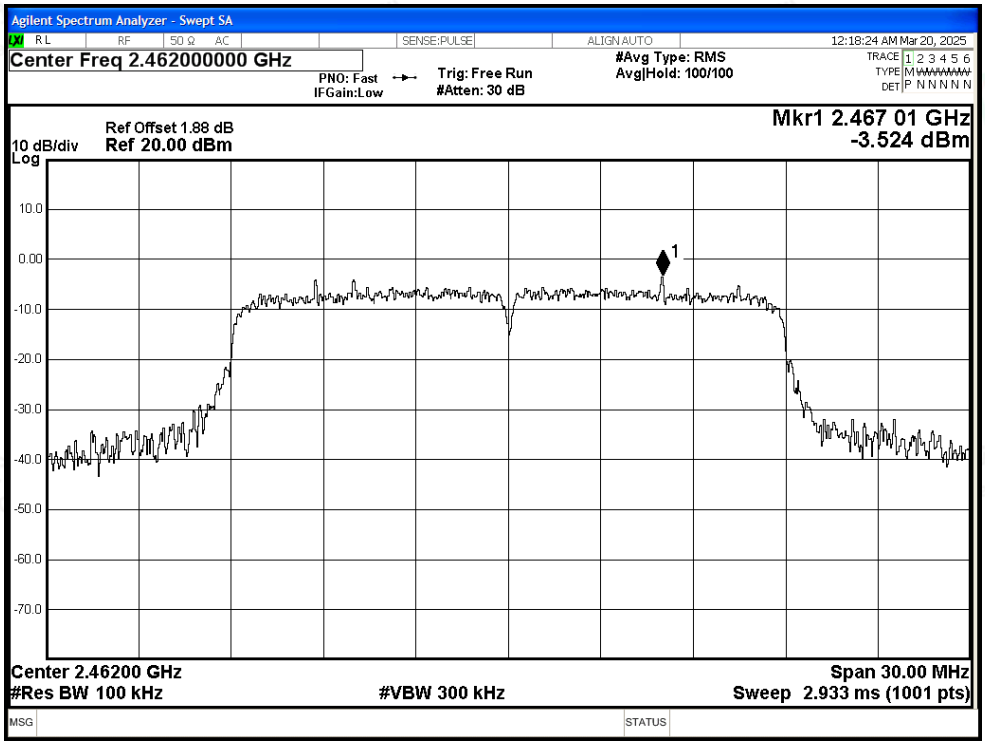

Band Edge NVNT n20 2462MHz Ant1 Emission

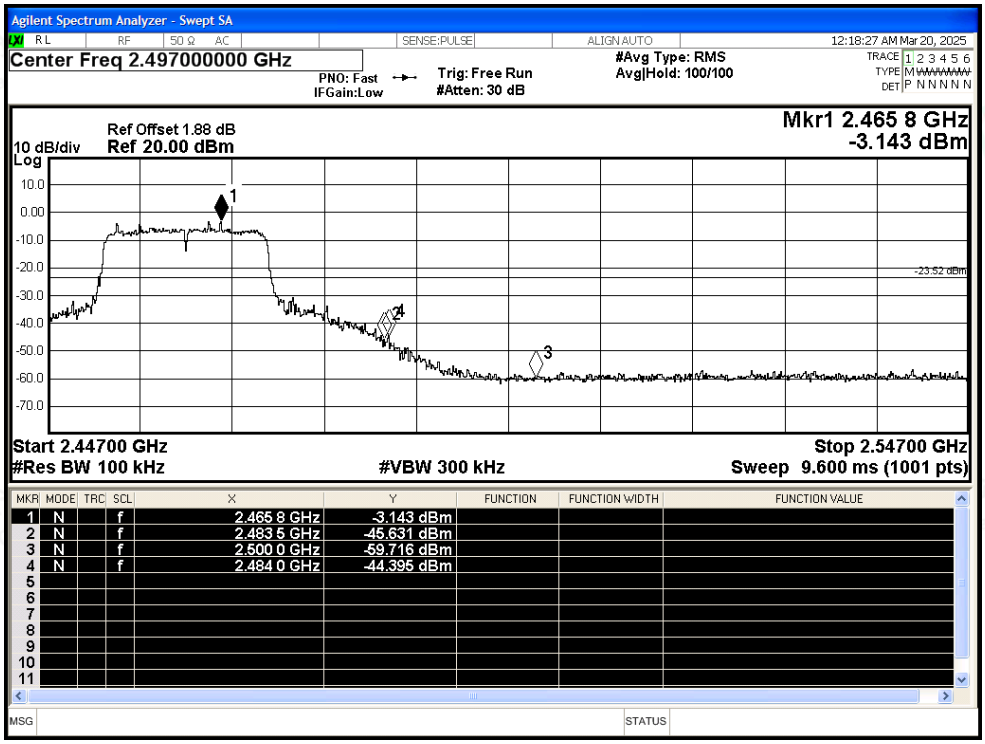

A.5 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-51.44	-20	Pass
NVNT	b	2437	Ant1	-51.94	-20	Pass
NVNT	b	2462	Ant1	-50.76	-20	Pass
NVNT	g	2412	Ant1	-44.36	-20	Pass
NVNT	g	2437	Ant1	-44.94	-20	Pass
NVNT	g	2462	Ant1	-44.94	-20	Pass
NVNT	n20	2412	Ant1	-43.6	-20	Pass
NVNT	n20	2437	Ant1	-42.46	-20	Pass
NVNT	n20	2462	Ant1	-42.57	-20	Pass

Test Graphs

Tx. Spurious NVNT b 2412MHz Ant1 Ref

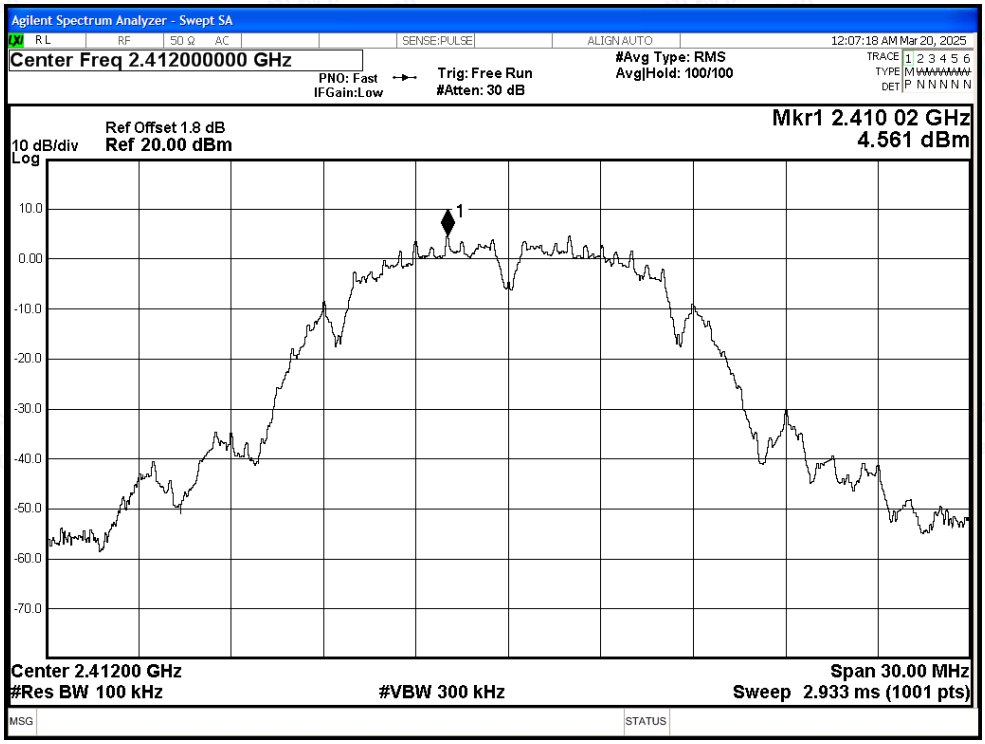

Tx. Spurious NVNT b 2412MHz Ant1 Emission

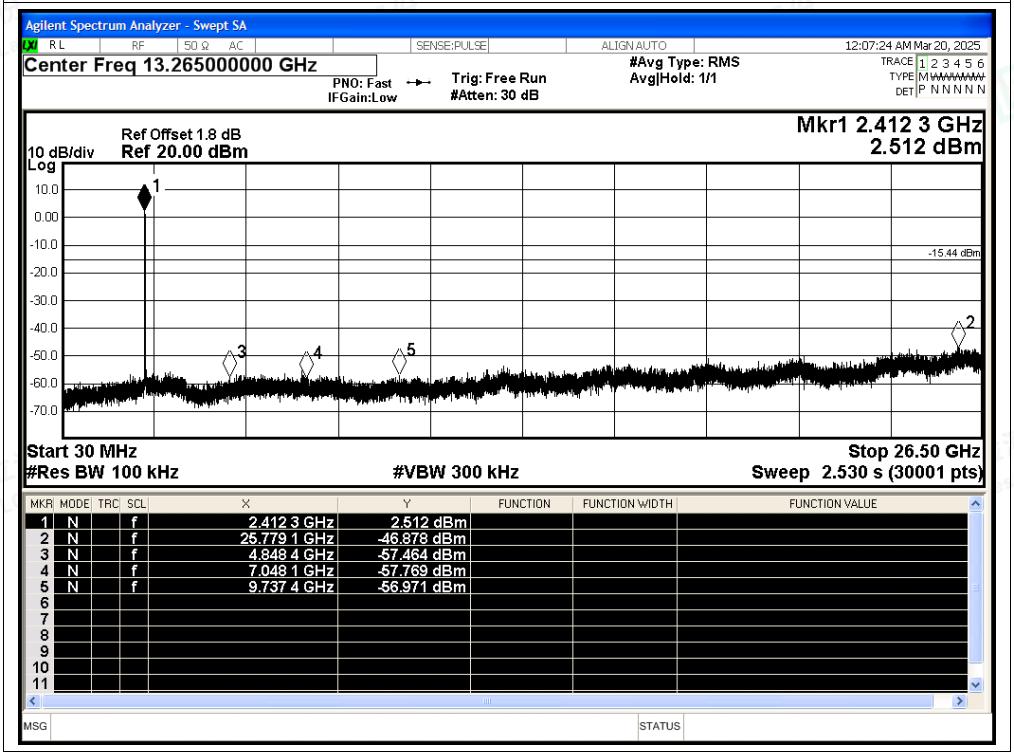

Tx. Spurious NVNT b 2437MHz Ant1 Ref

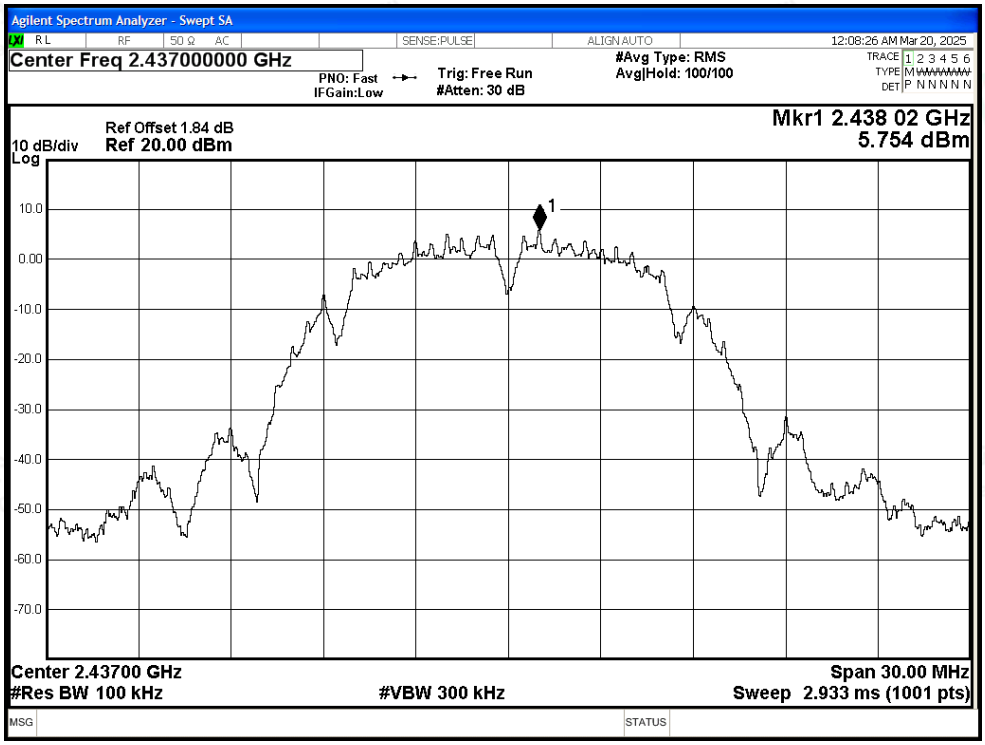

Tx. Spurious NVNT b 2437MHz Ant1 Emission

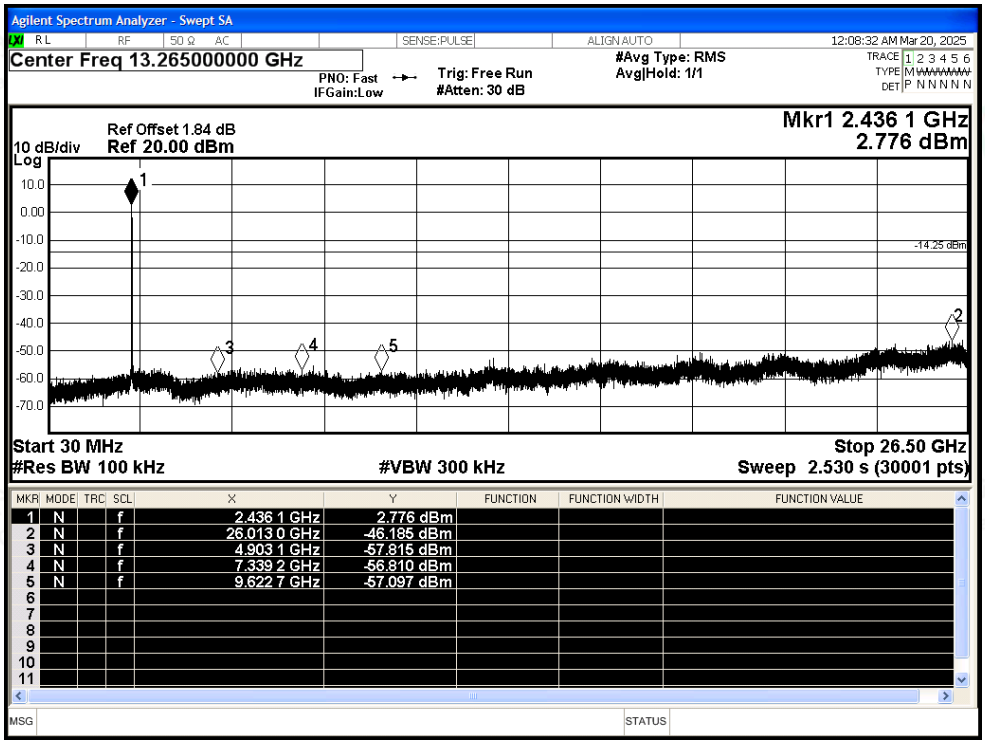

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N		f	2.436 1 GHz	2.776 dBm			
2	N		f	26.013 0 GHz	-46.185 dBm			
3	N		f	4.903 1 GHz	-57.815 dBm			
4	N		f	7.339 2 GHz	-56.810 dBm			
5	N		f	9.622 7 GHz	-57.097 dBm			
6								
7								
8								
9								
10								
11								

Tx. Spurious NVNT b 2462MHz Ant1 Ref

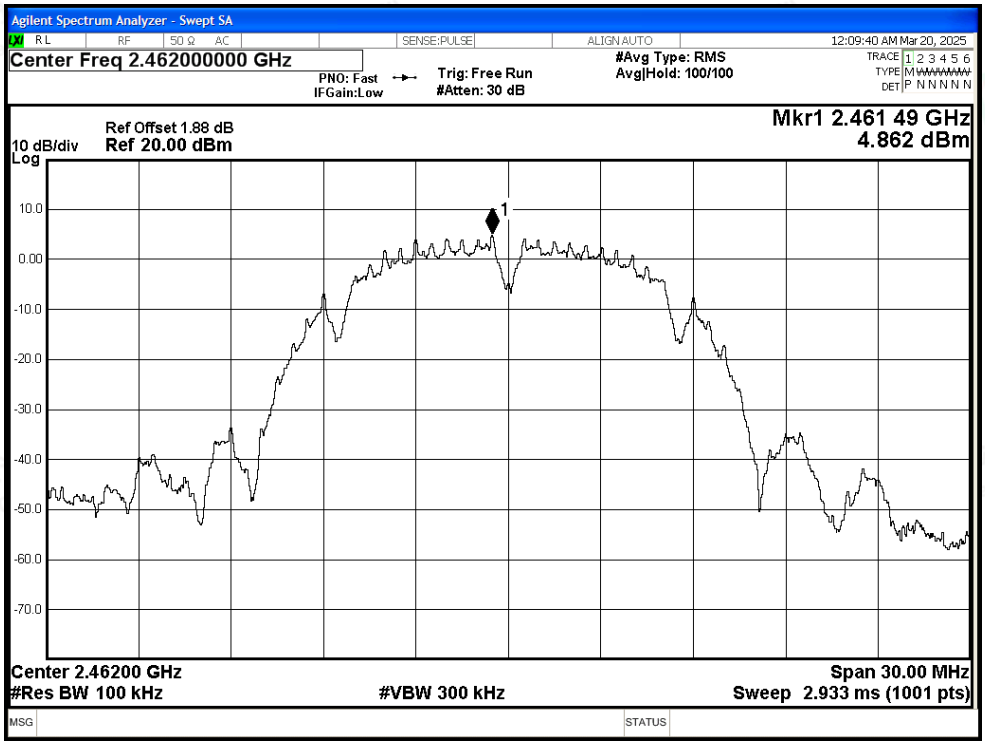

Tx. Spurious NVNT b 2462MHz Ant1 Emission

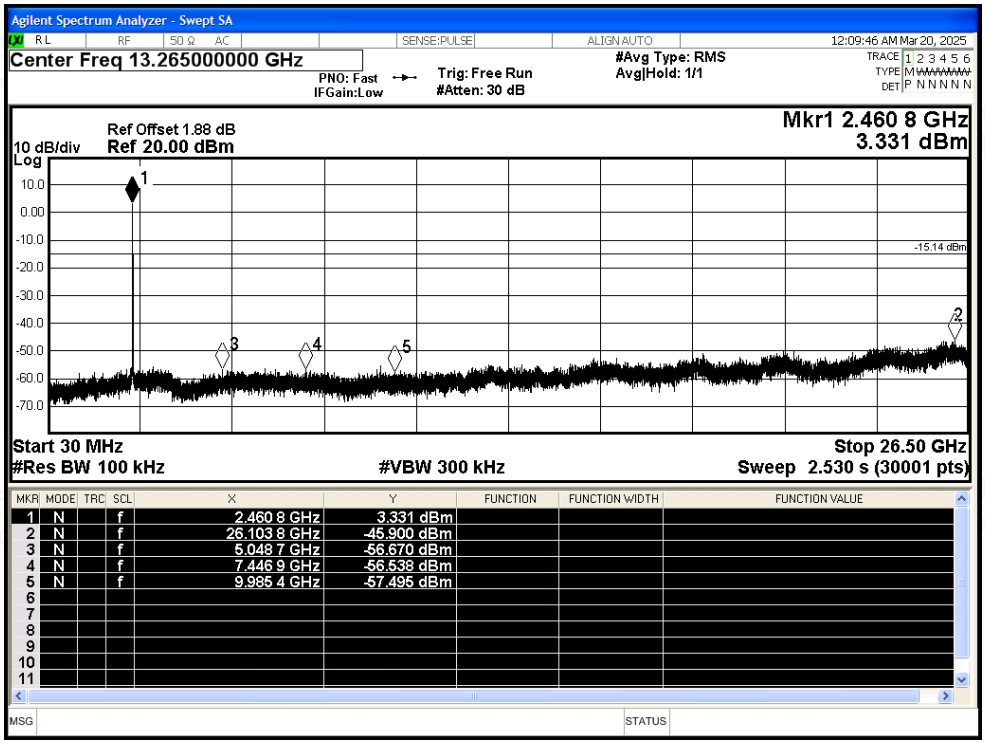

Tx. Spurious NVNT g 2412MHz Ant1 Ref

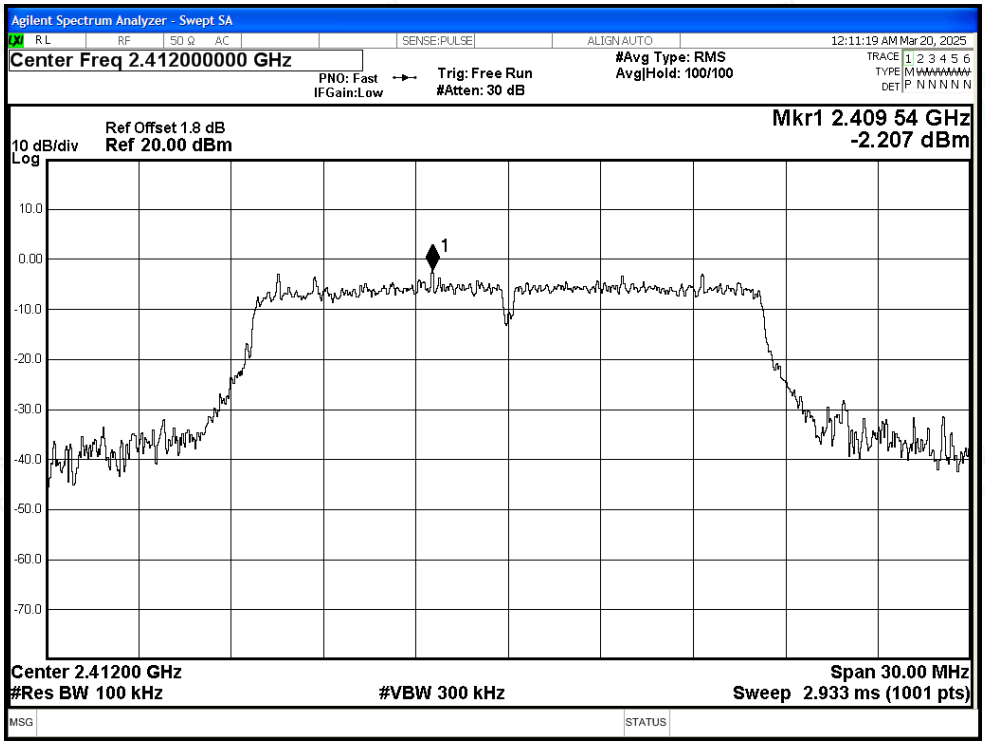

Tx. Spurious NVNT g 2412MHz Ant1 Emission

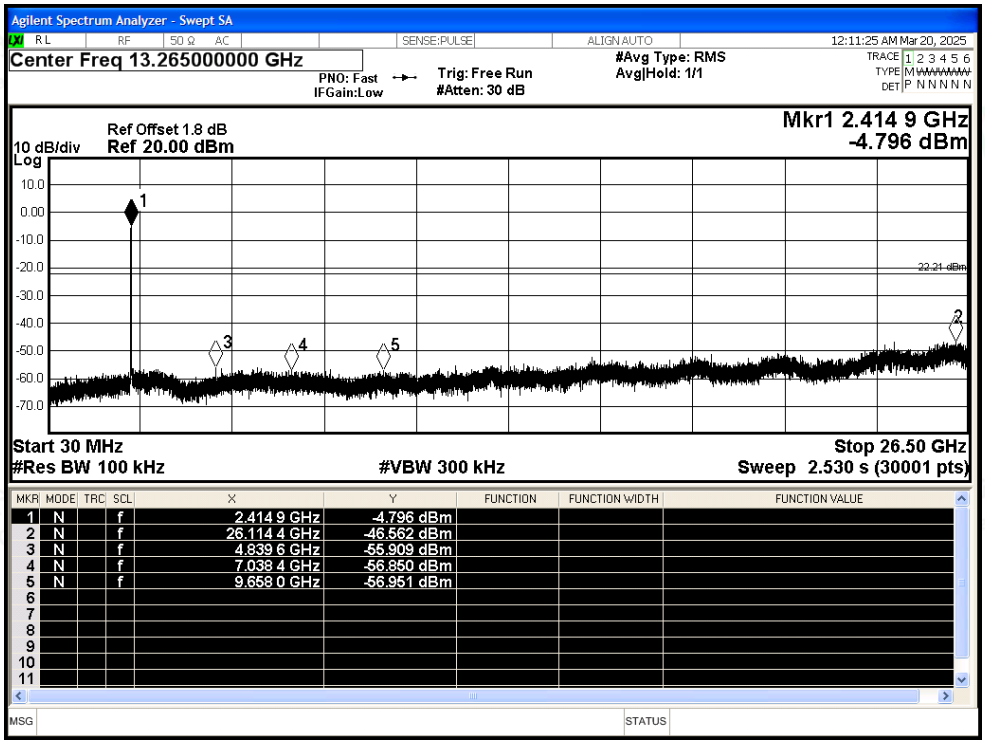

Tx. Spurious NVNT g 2437MHz Ant1 Ref

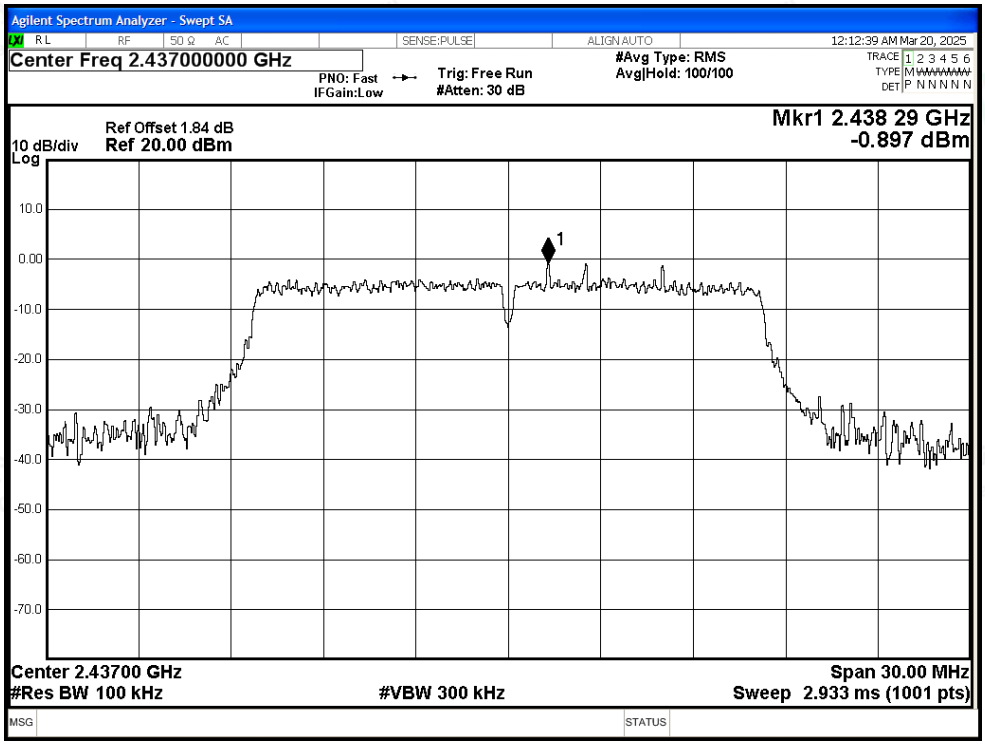

Tx. Spurious NVNT g 2437MHz Ant1 Emission

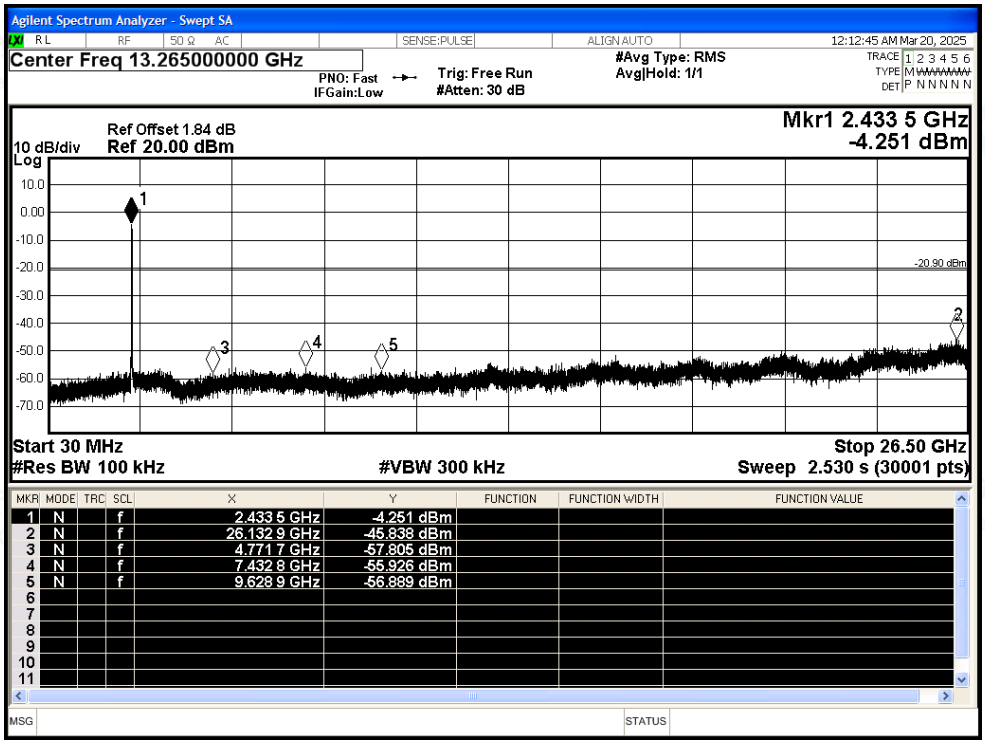

Tx. Spurious NVNT g 2462MHz Ant1 Ref

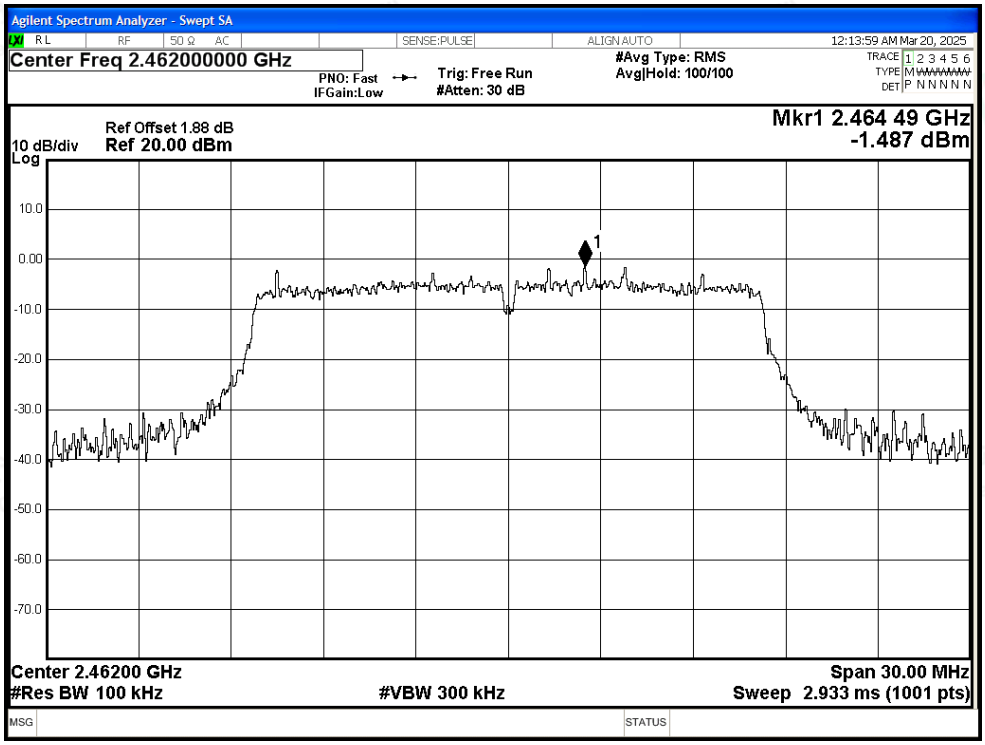

Tx. Spurious NVNT g 2462MHz Ant1 Emission

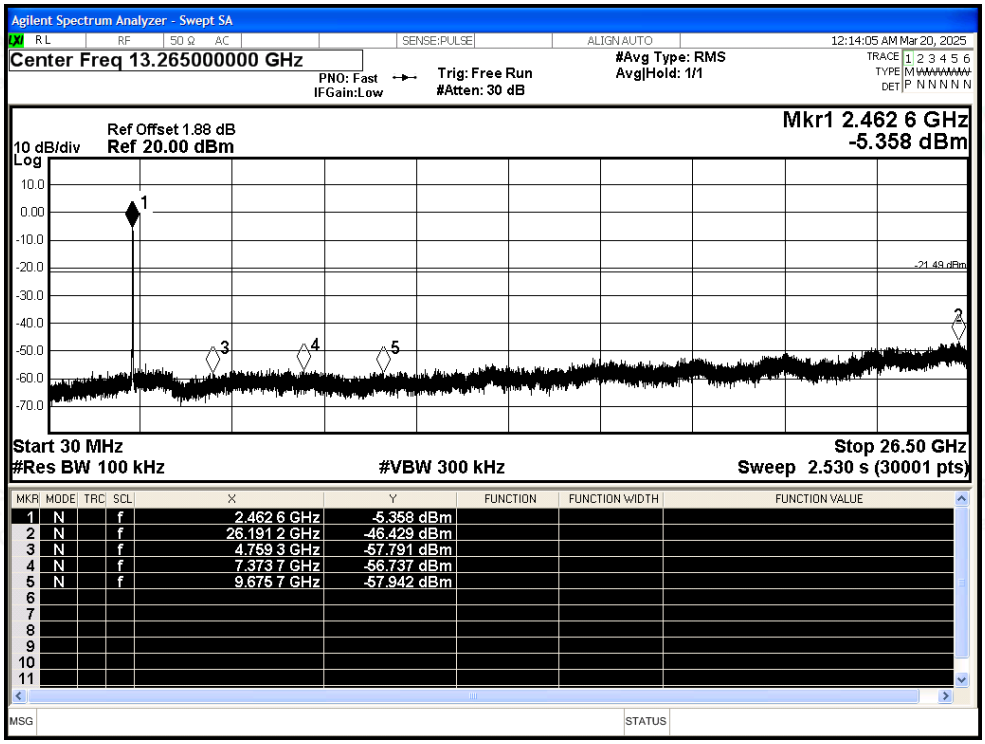

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N		f	2.462 6 GHz	-5.358 dBm			
2	N		f	26.191 2 GHz	-46.429 dBm			
3	N		f	4.759 3 GHz	-57.791 dBm			
4	N		f	7.373 7 GHz	-56.737 dBm			
5	N		f	9.675 7 GHz	-57.942 dBm			
6								
7								
8								
9								
10								
11								

Tx. Spurious NVNT n20 2412MHz Ant1 Ref

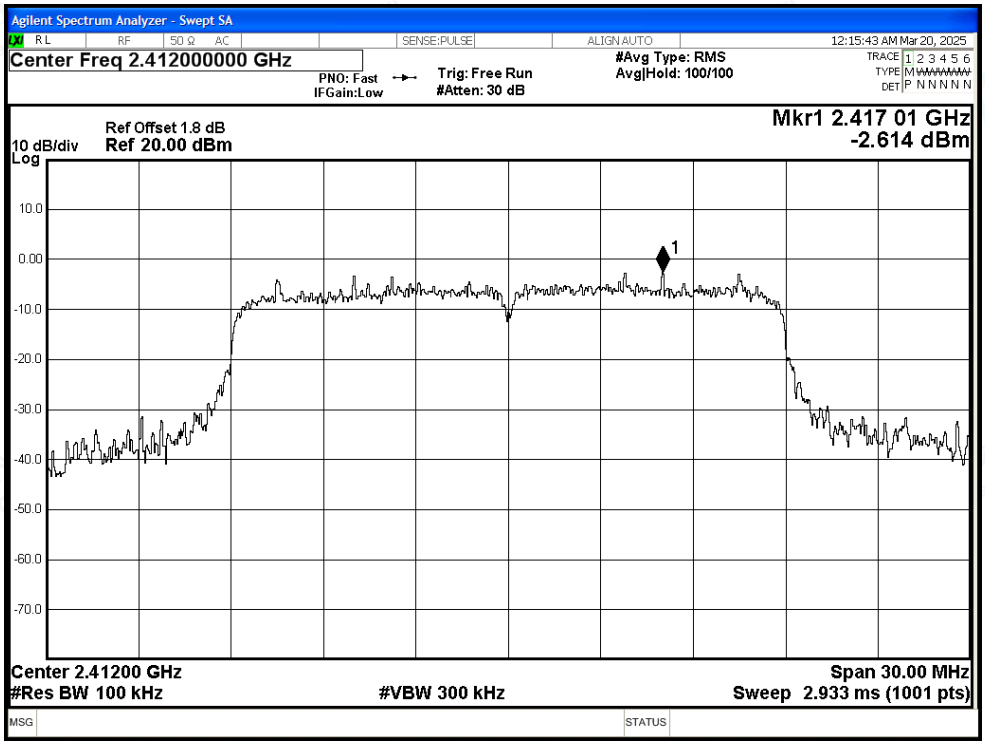

Tx. Spurious NVNT n20 2412MHz Ant1 Emission

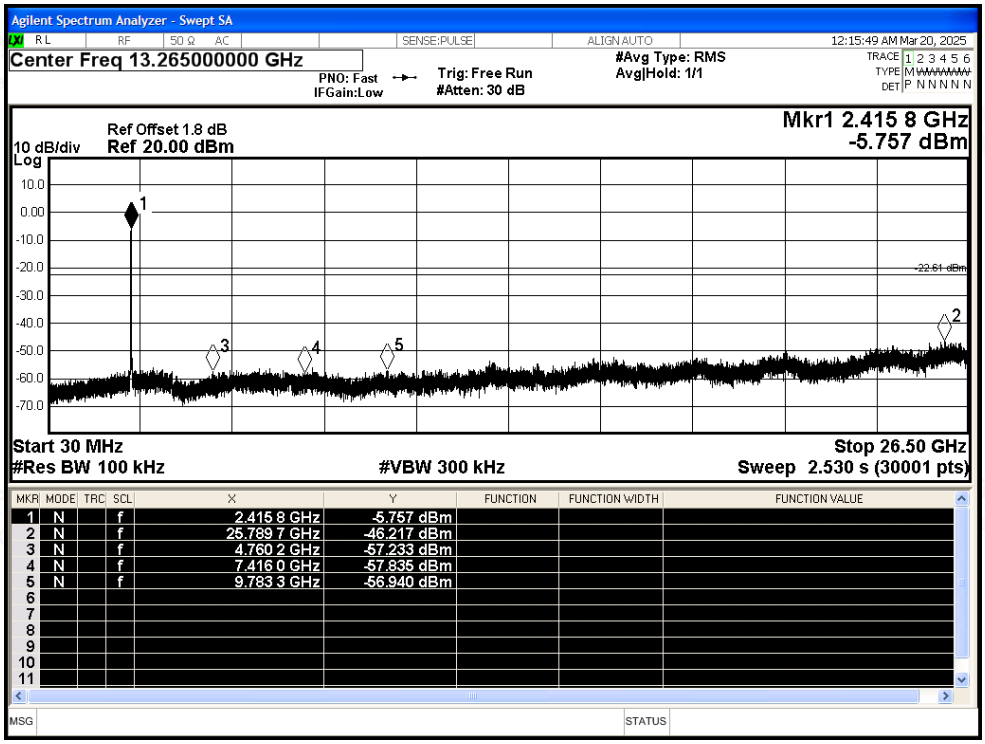

Tx. Spurious NVNT n20 2437MHz Ant1 Ref

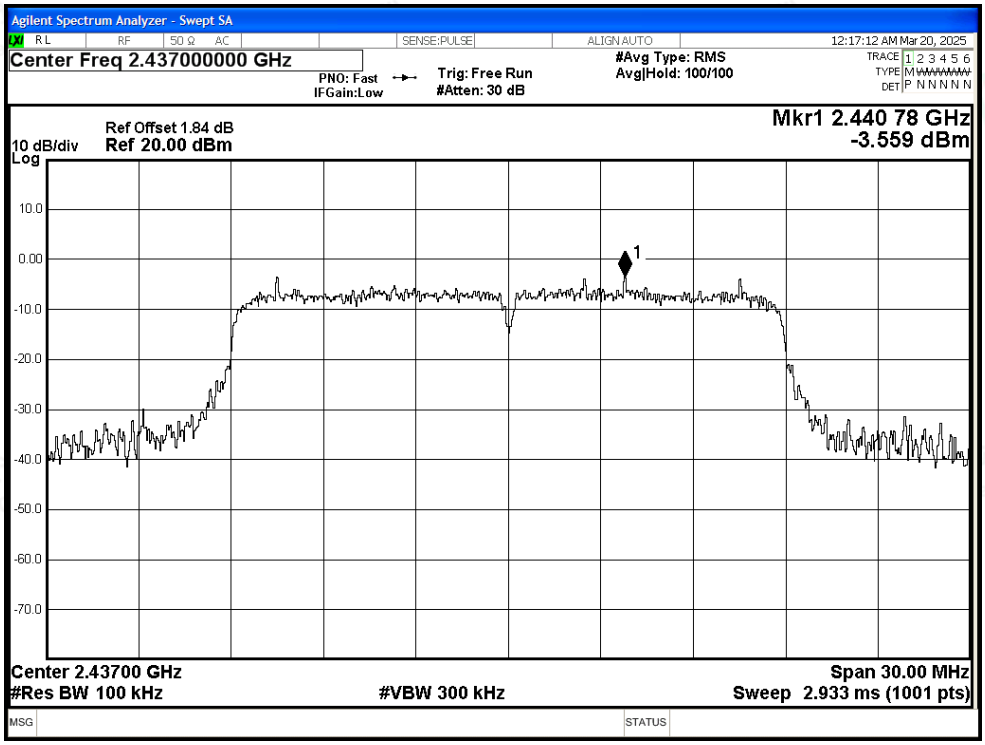

Tx. Spurious NVNT n20 2437MHz Ant1 Emission

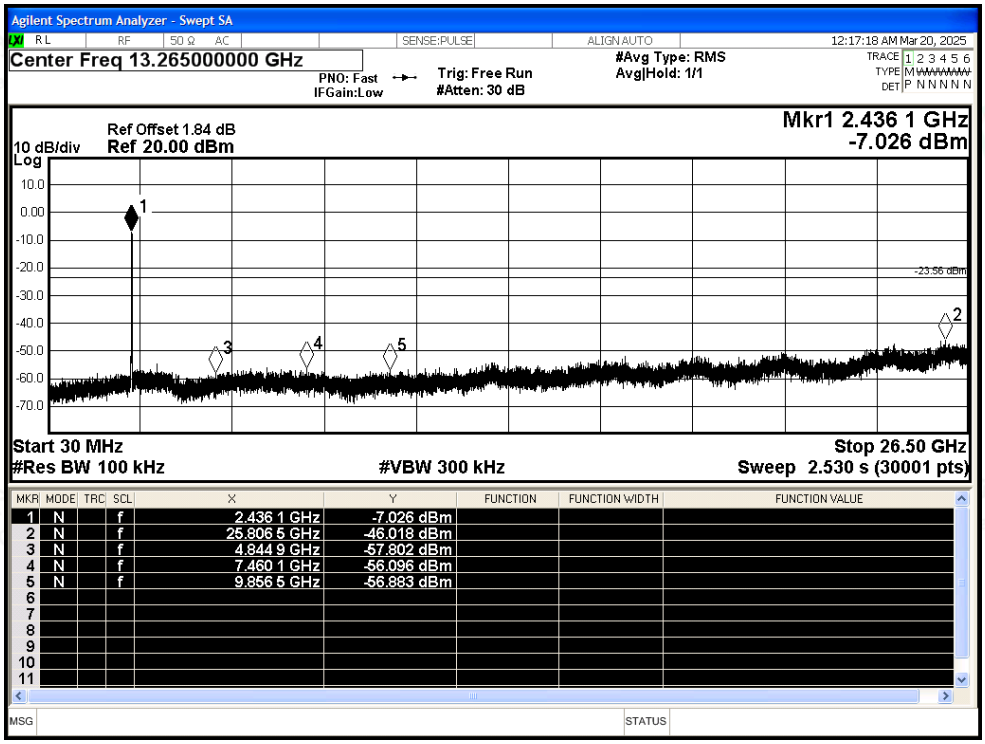

Tx. Spurious NVNT n20 2462MHz Ant1 Ref

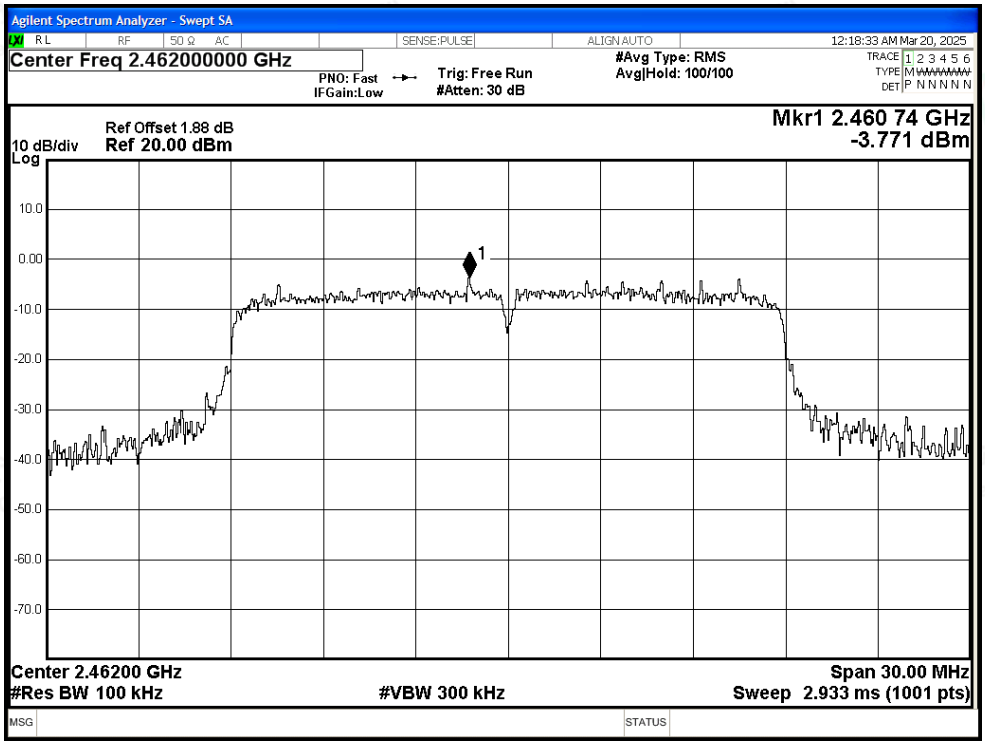

Tx. Spurious NVNT n20 2462MHz Ant1 Emission

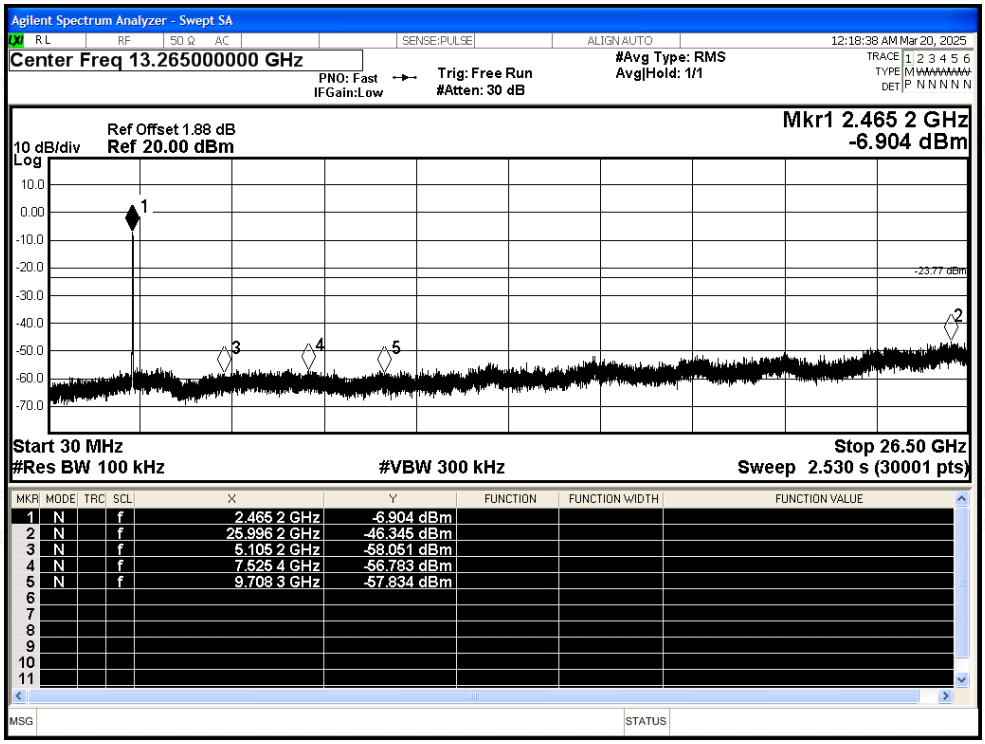

A.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	99.13	0	0.15
NVNT	b	2437	Ant1	99.16	0	0.15
NVNT	b	2462	Ant1	99.16	0	0.15
NVNT	g	2412	Ant1	97.68	0.1	0.37
NVNT	g	2437	Ant1	97.75	0.1	0.37
NVNT	g	2462	Ant1	97.68	0.1	0.37
NVNT	n20	2412	Ant1	97.25	0.12	0.44
NVNT	n20	2437	Ant1	97.25	0.12	0.44
NVNT	n20	2462	Ant1	97.33	0.12	0.44

Test Graphs

Duty Cycle NVNT b 2412MHz Ant1

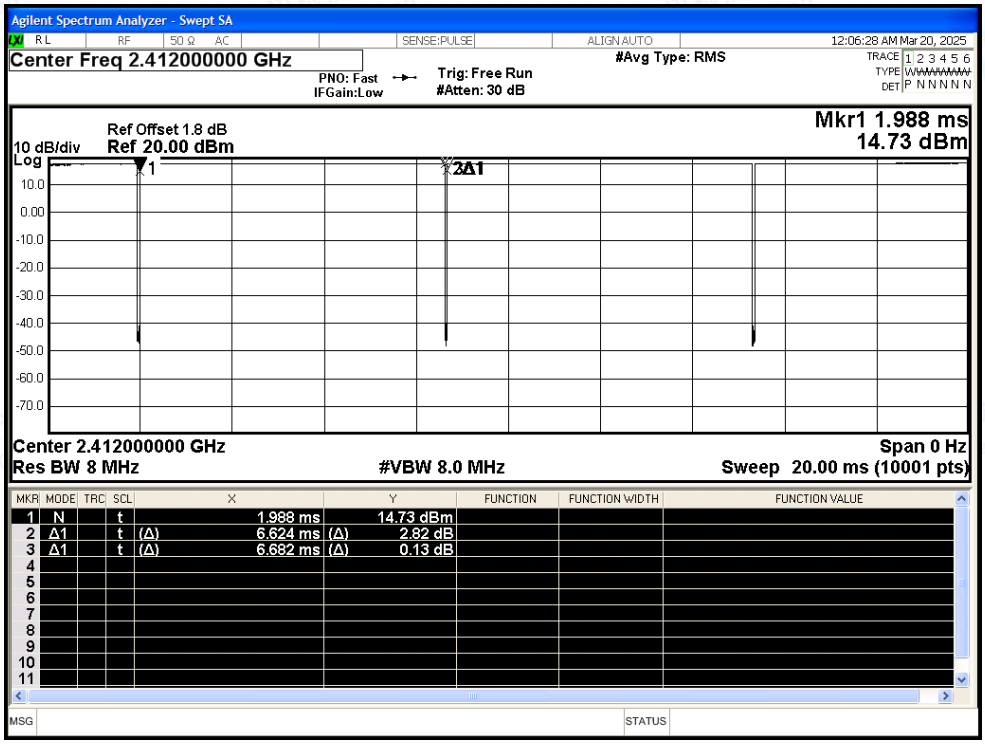

Duty Cycle NVNT b 2437MHz Ant1

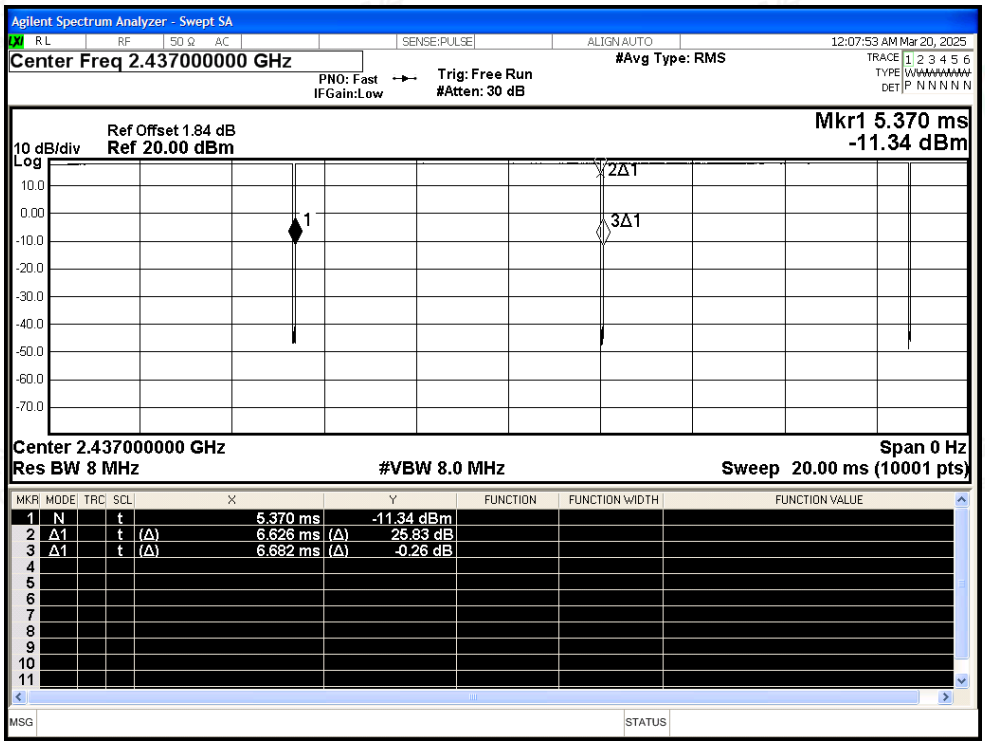

Duty Cycle NVNT b 2462MHz Ant1

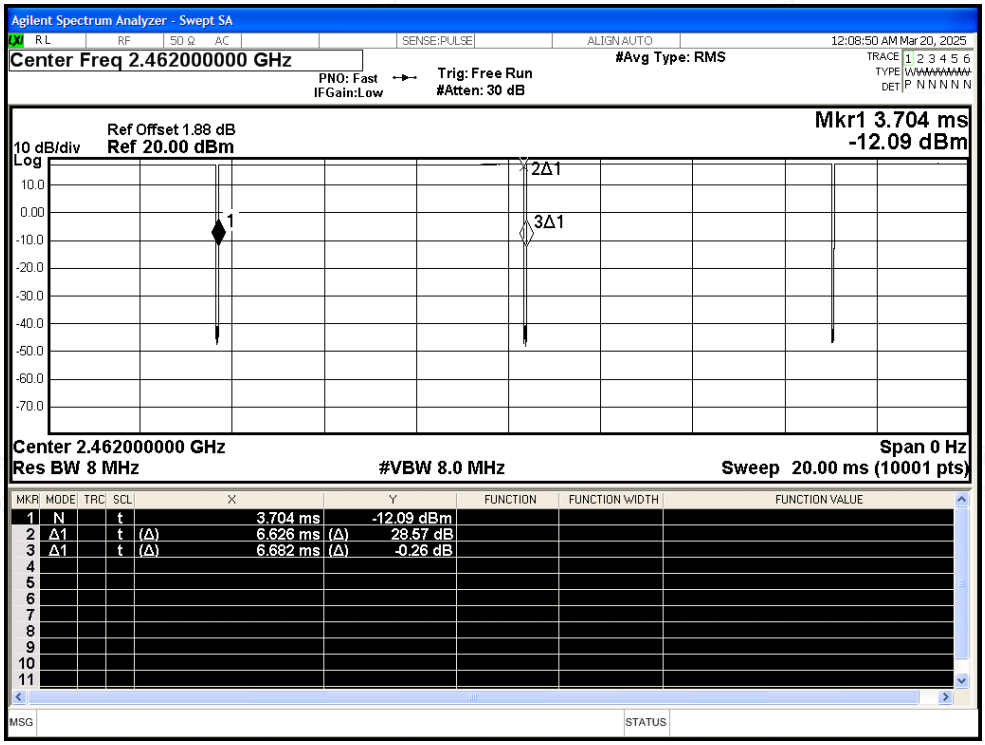

Duty Cycle NVNT g 2412MHz Ant1

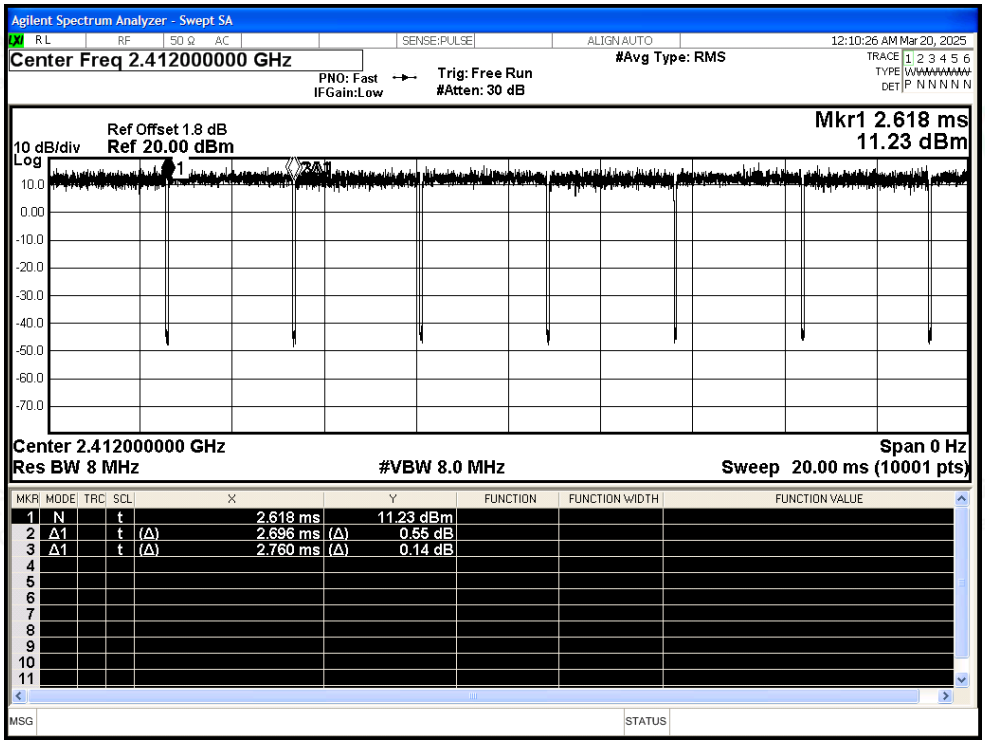

Duty Cycle NVNT g 2437MHz Ant1

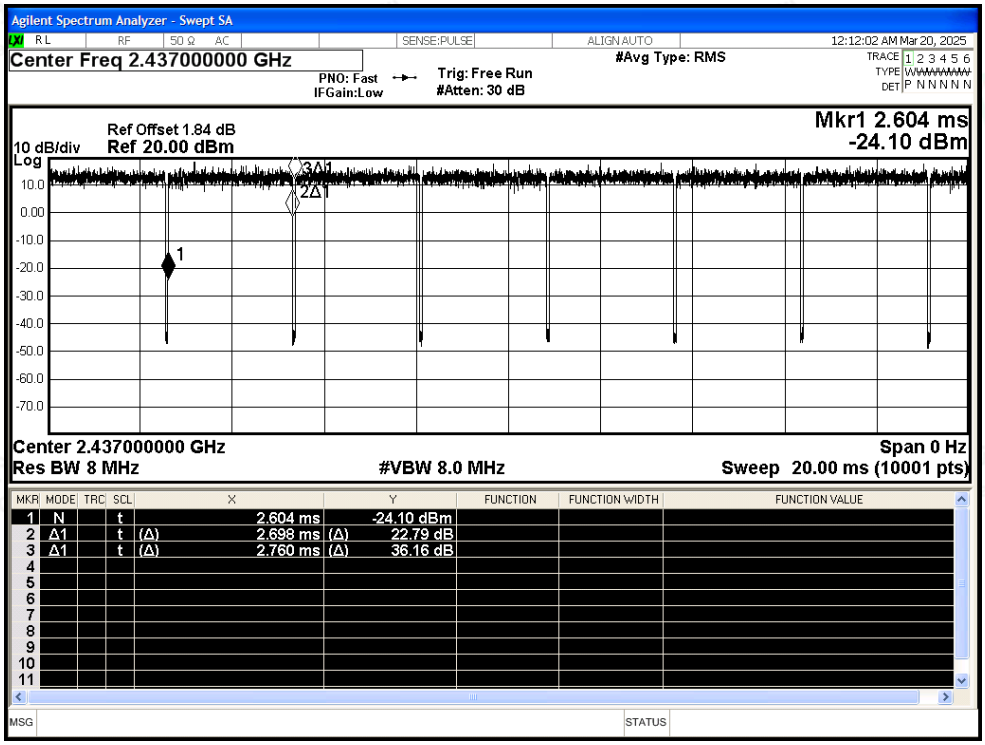

Duty Cycle NVNT g 2462MHz Ant1

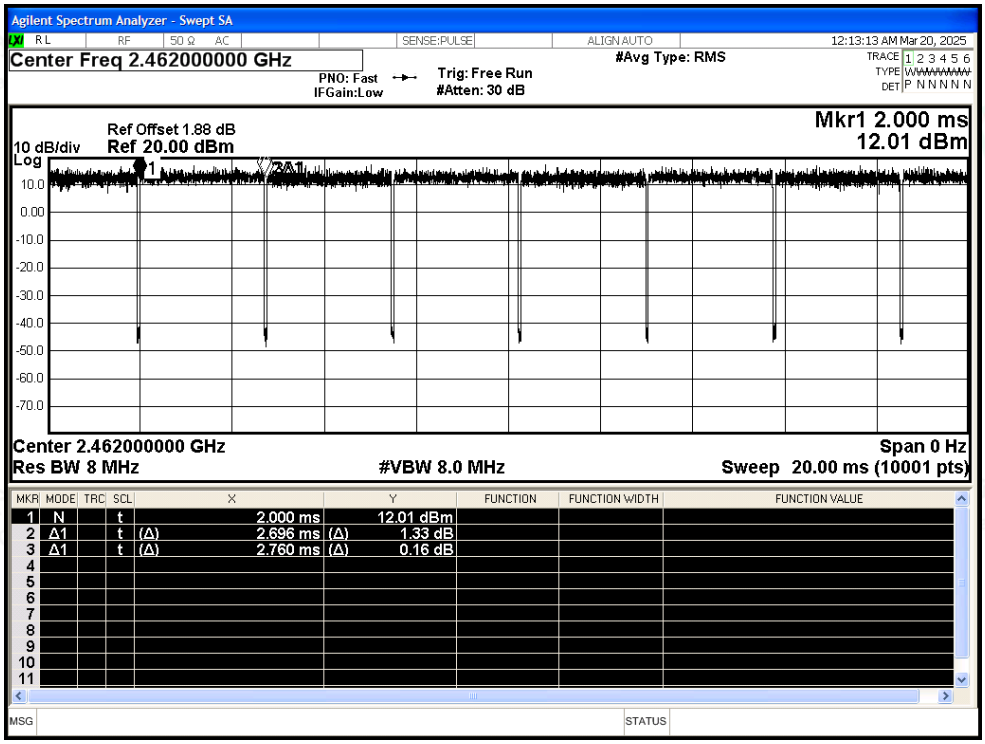

Duty Cycle NVNT n20 2412MHz Ant1

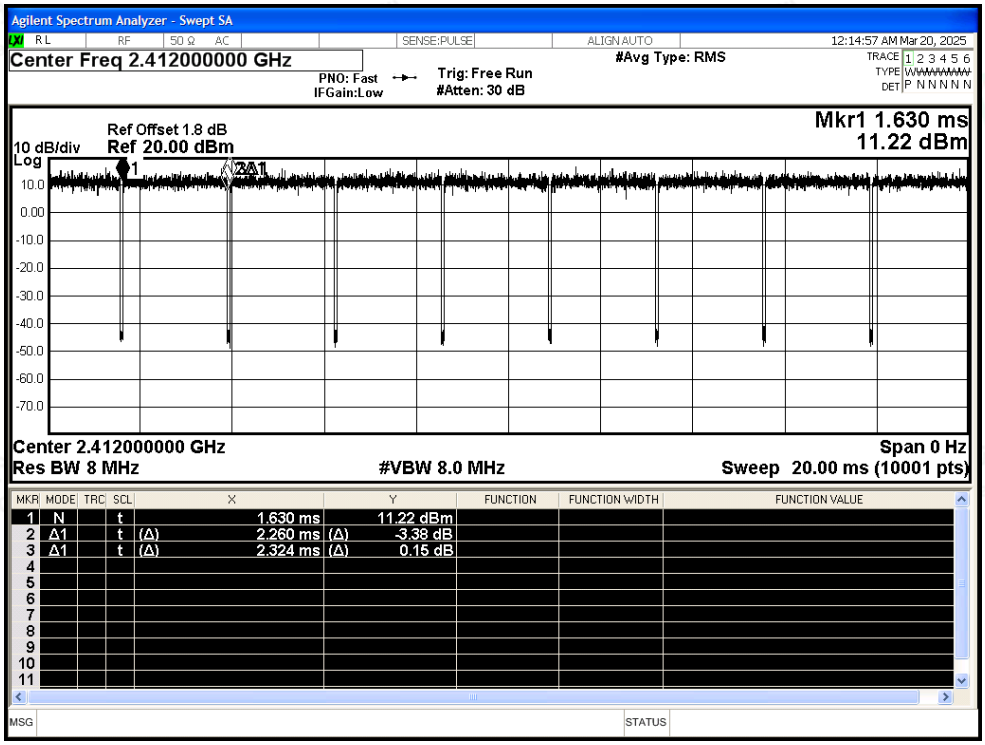

Duty Cycle NVNT n20 2437MHz Ant1

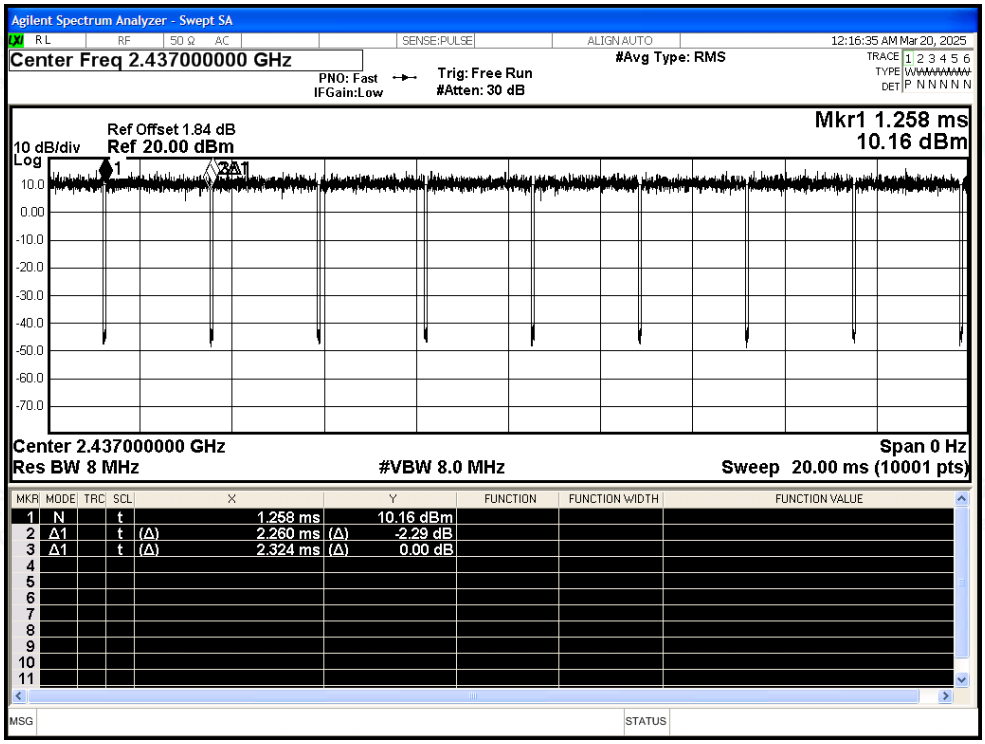

Duty Cycle NVNT n20 2462MHz Ant1

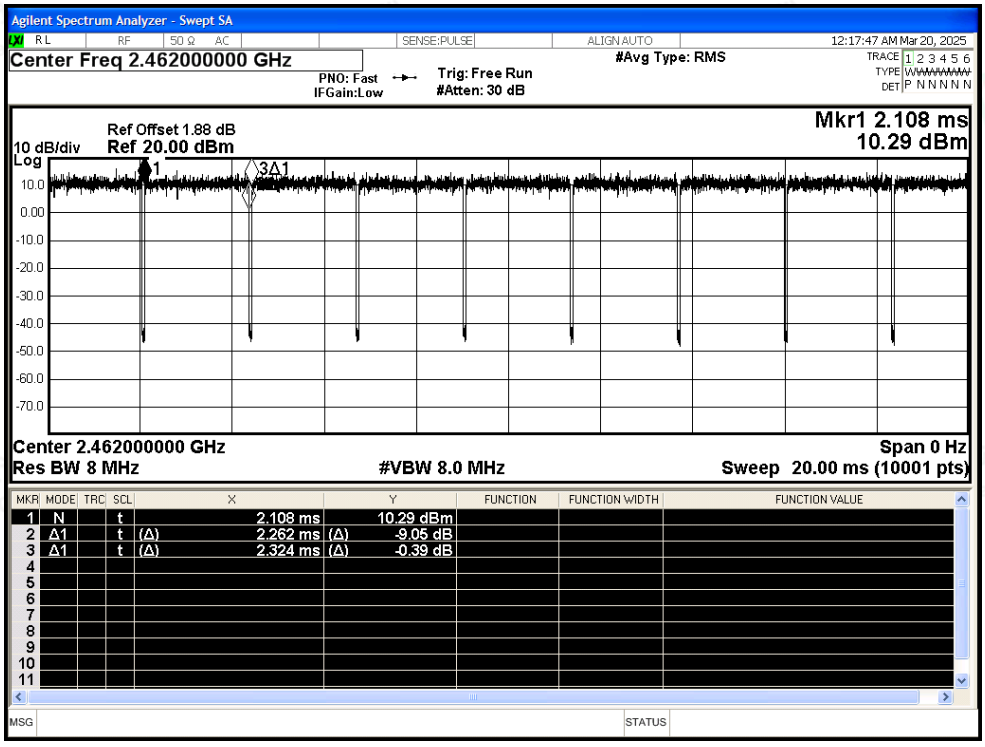

A.7 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	b	2412	Ant1	2310	-50.8	2	-	46.46	Peak	74	Pass
NVNT	b	2412	Ant1	2310	-58.5	2	0	38.76	Average	54	Pass
NVNT	b	2412	Ant1	2378.679	-46.91	2	-	50.35	Peak	74	Pass
NVNT	b	2412	Ant1	2389.56	-55.33	2	0	41.93	Average	54	Pass
NVNT	b	2412	Ant1	2390	-49.1	2	-	48.16	Peak	74	Pass
NVNT	b	2412	Ant1	2390	-56.34	2	0	40.92	Average	54	Pass
NVNT	b	2462	Ant1	2483.5	-46.58	2	-	50.68	Peak	74	Pass
NVNT	b	2462	Ant1	2483.5	-54.84	2	0	42.42	Average	54	Pass
NVNT	b	2462	Ant1	2484.418	-44.52	2	-	52.74	Peak	74	Pass
NVNT	b	2462	Ant1	2483.888	-54.21	2	0	43.05	Average	54	Pass
NVNT	b	2462	Ant1	2500	-51.21	2	-	46.05	Peak	74	Pass
NVNT	b	2462	Ant1	2500	-58.48	2	0	38.78	Average	54	Pass
NVNT	g	2412	Ant1	2310	-51.72	2	-	45.54	Peak	74	Pass
NVNT	g	2412	Ant1	2310	-59.01	2	0.1	38.35	Average	54	Pass
NVNT	g	2412	Ant1	2389.092	-34.09	2	-	63.17	Peak	74	Pass
NVNT	g	2412	Ant1	2389.794	-51.82	2	0.1	45.54	Average	54	Pass
NVNT	g	2412	Ant1	2390	-35.33	2	-	61.93	Peak	74	Pass
NVNT	g	2412	Ant1	2390	-52.09	2	0.1	45.27	Average	54	Pass
NVNT	g	2462	Ant1	2483.5	-41.85	2	-	55.41	Peak	74	Pass
NVNT	g	2462	Ant1	2483.5	-55.18	2	0.1	42.18	Average	54	Pass
NVNT	g	2462	Ant1	2485.213	-41.27	2	-	55.99	Peak	74	Pass
NVNT	g	2462	Ant1	2483.729	-54.91	2	0.1	42.45	Average	54	Pass
NVNT	g	2462	Ant1	2500	-51.33	2	-	45.93	Peak	74	Pass
NVNT	g	2462	Ant1	2500	-58.16	2	0.1	39.2	Average	54	Pass
NVNT	n20	2412	Ant1	2310	-51.63	2	-	45.63	Peak	74	Pass
NVNT	n20	2412	Ant1	2310	-58.7	2	0.12	38.68	Average	54	Pass
NVNT	n20	2412	Ant1	2389.911	-41.67	2	-	55.59	Peak	74	Pass
NVNT	n20	2412	Ant1	2389.794	-55.95	2	0.12	41.43	Average	54	Pass
NVNT	n20	2412	Ant1	2390	-45.78	2	-	51.48	Peak	74	Pass
NVNT	n20	2412	Ant1	2390	-56.51	2	0.12	40.87	Average	54	Pass
NVNT	n20	2462	Ant1	2483.5	-40.71	2	-	56.55	Peak	74	Pass
NVNT	n20	2462	Ant1	2483.5	-54.52	2	0.12	42.86	Average	54	Pass
NVNT	n20	2462	Ant1	2483.888	-36.43	2	-	60.83	Peak	74	Pass
NVNT	n20	2462	Ant1	2483.835	-53.56	2	0.12	43.82	Average	54	Pass
NVNT	n20	2462	Ant1	2500	-50.25	2	-	47.01	Peak	74	Pass
NVNT	n20	2462	Ant1	2500	-58.46	2	0.12	38.92	Average	54	Pass

Test Graphs

Restrict Band NVNT b 2412MHz Ant1 Peak

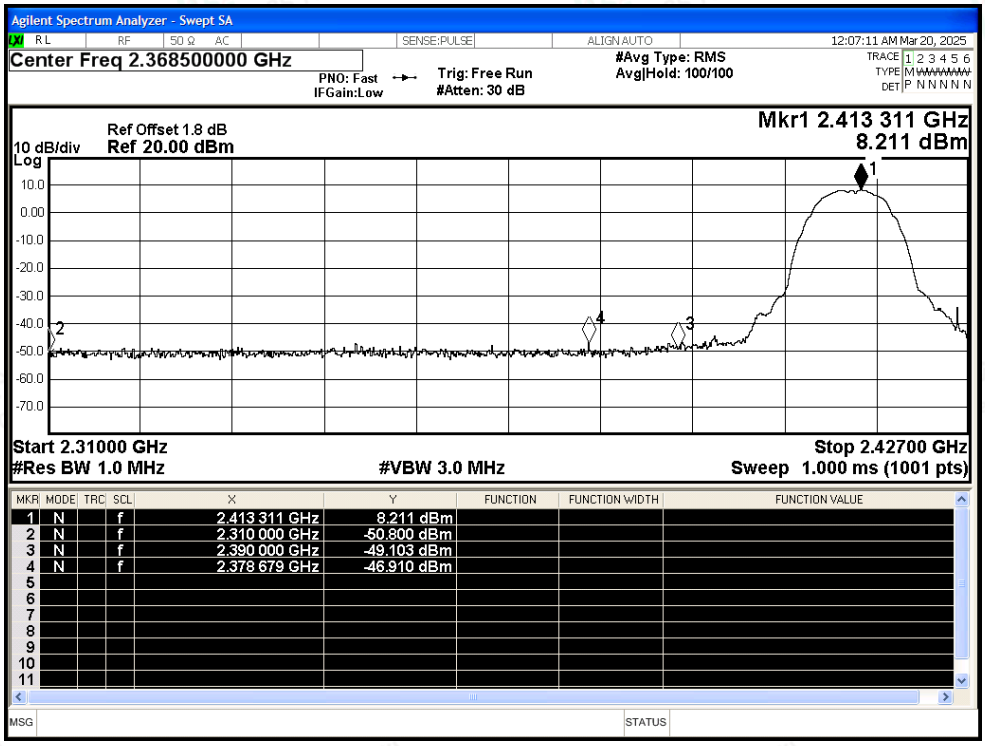

Restrict Band NVNT b 2412MHz Ant1 Average

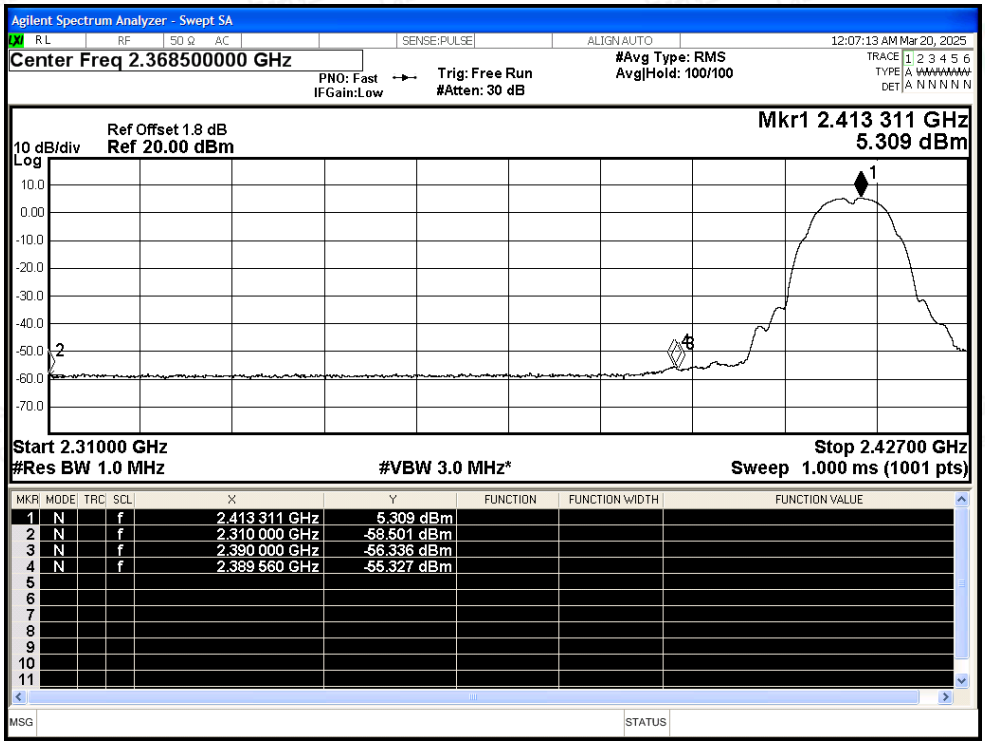

Restrict Band NVNT b 2462MHz Ant1 Peak

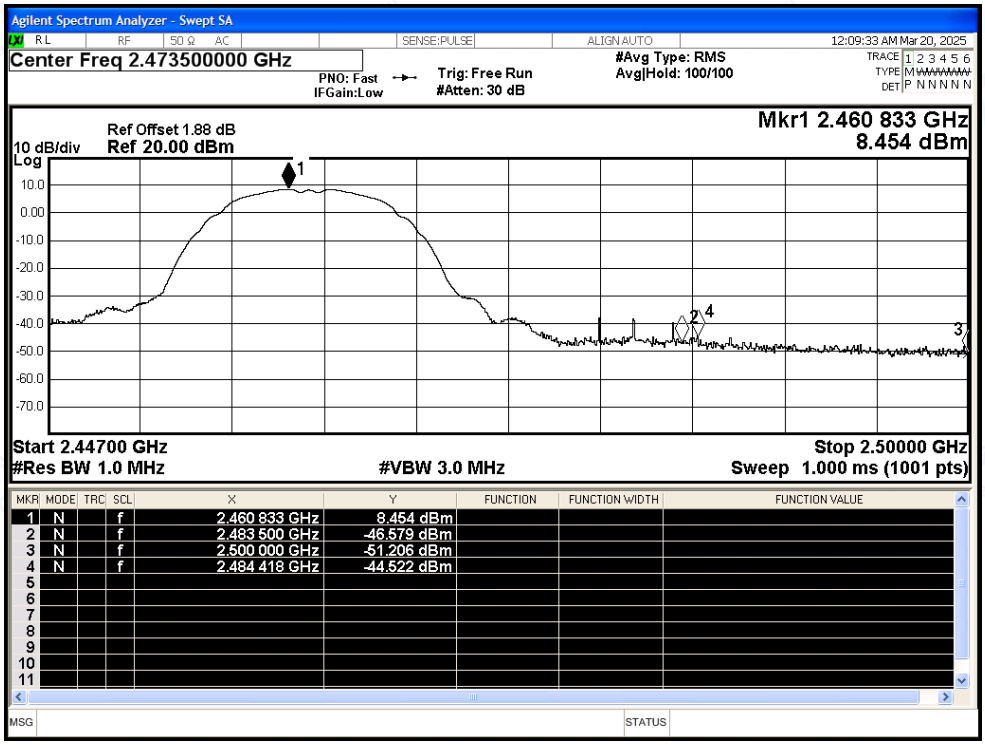

Restrict Band NVNT b 2462MHz Ant1 Average

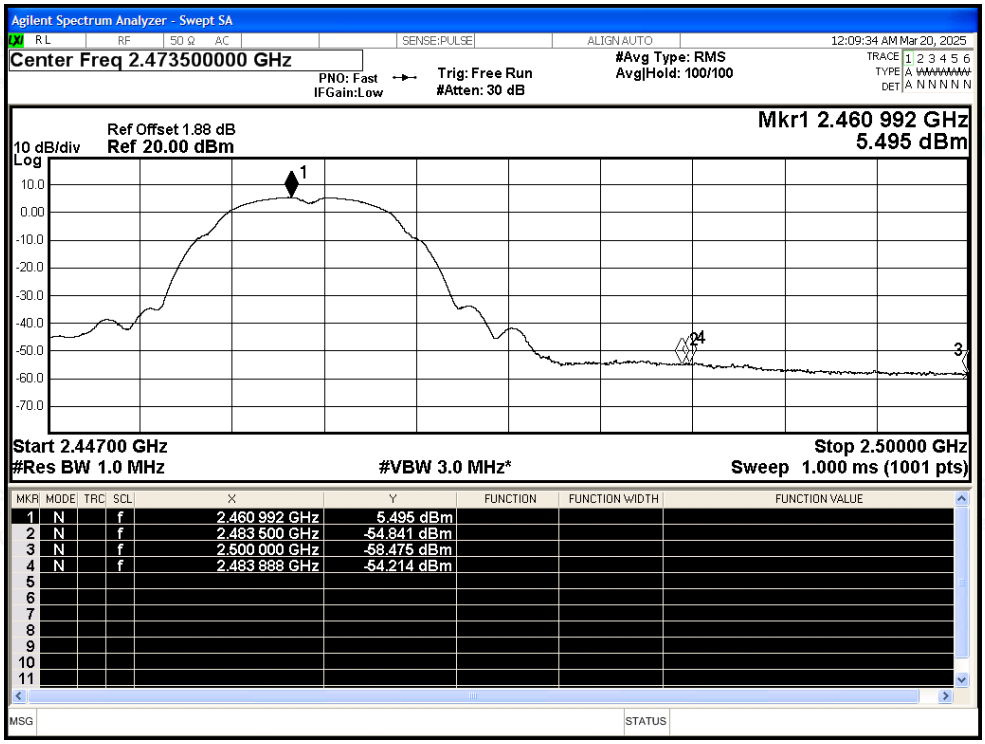

Restrict Band NVNT g 2412MHz Ant1 Peak

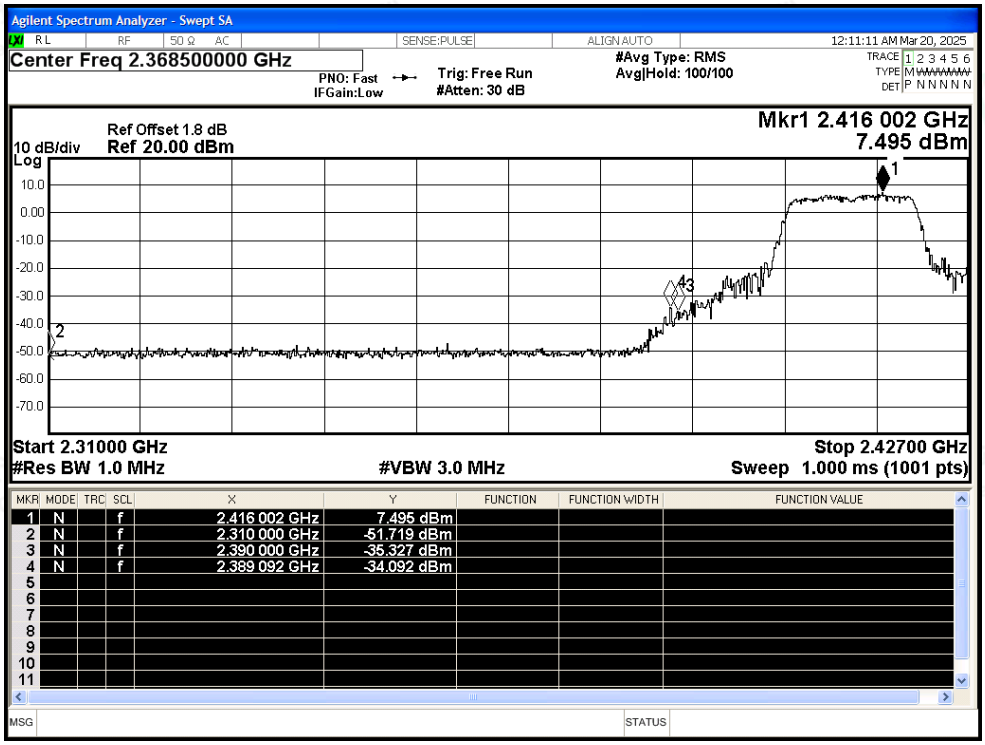

Restrict Band NVNT g 2412MHz Ant1 Average

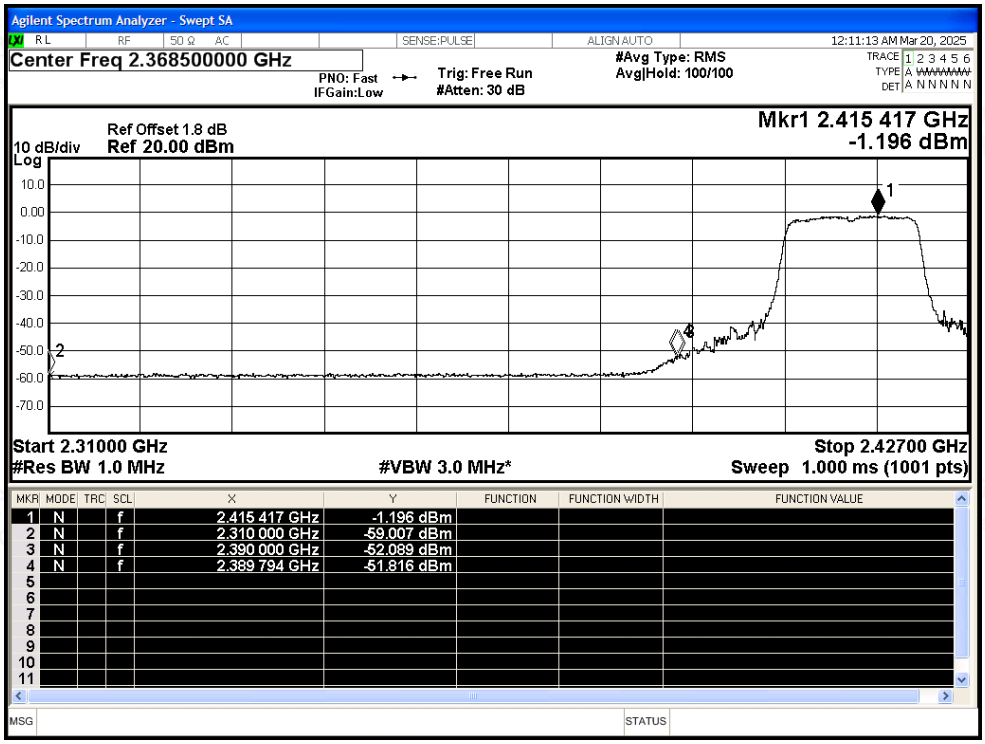

Restrict Band NVNT g 2462MHz Ant1 Peak

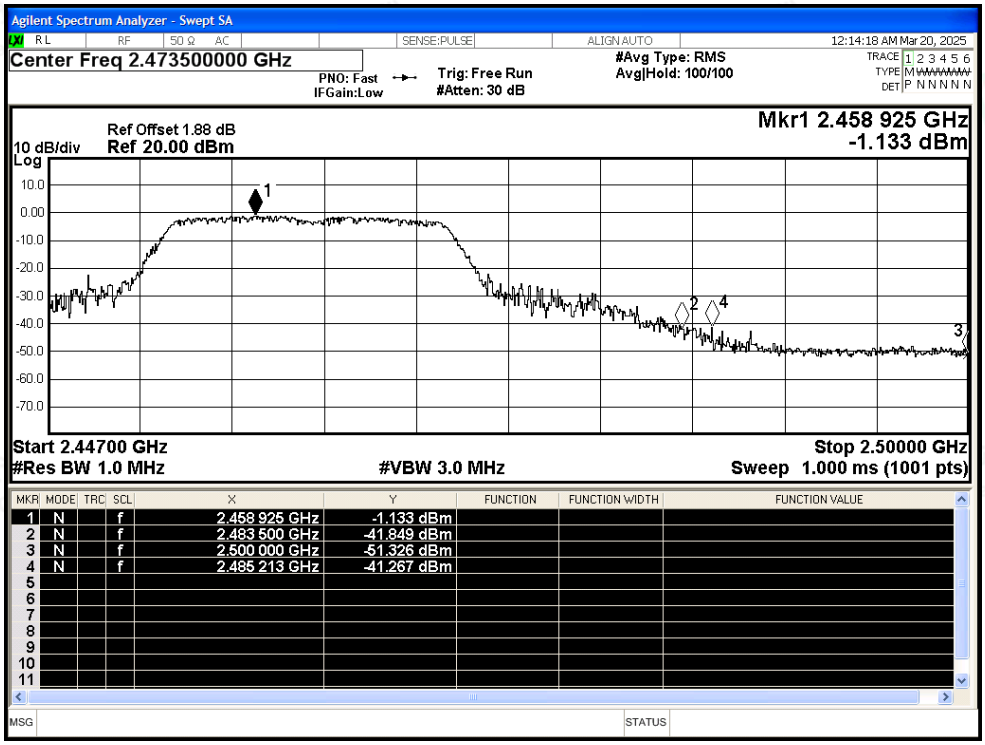

Restrict Band NVNT g 2462MHz Ant1 Average

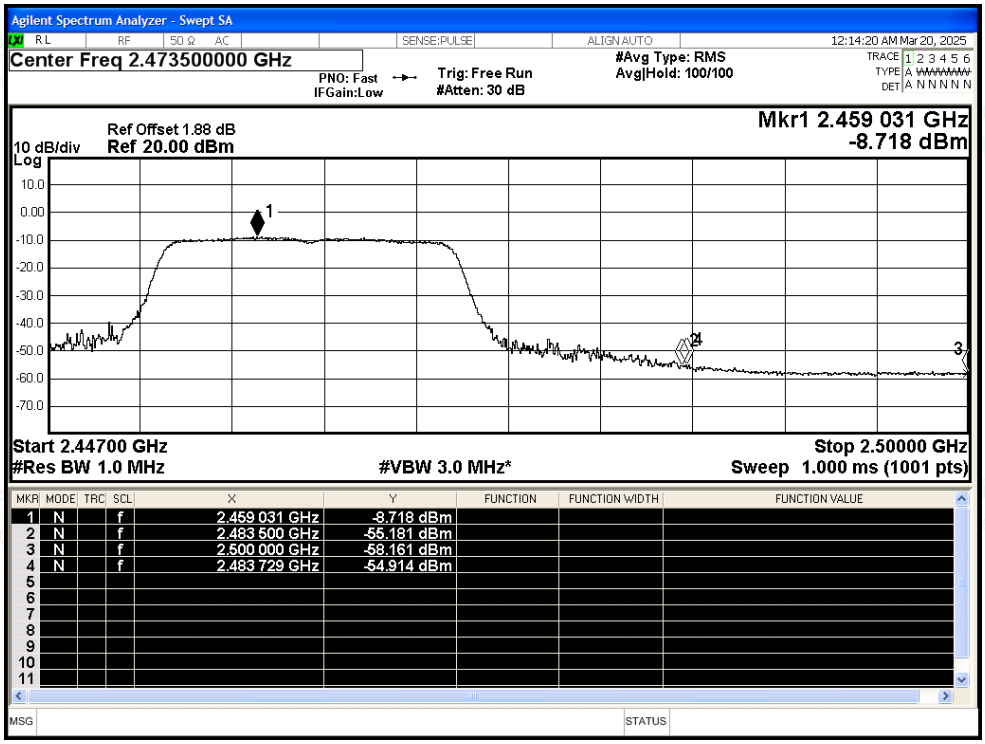

Restrict Band NVNT n20 2412MHz Ant1 Peak

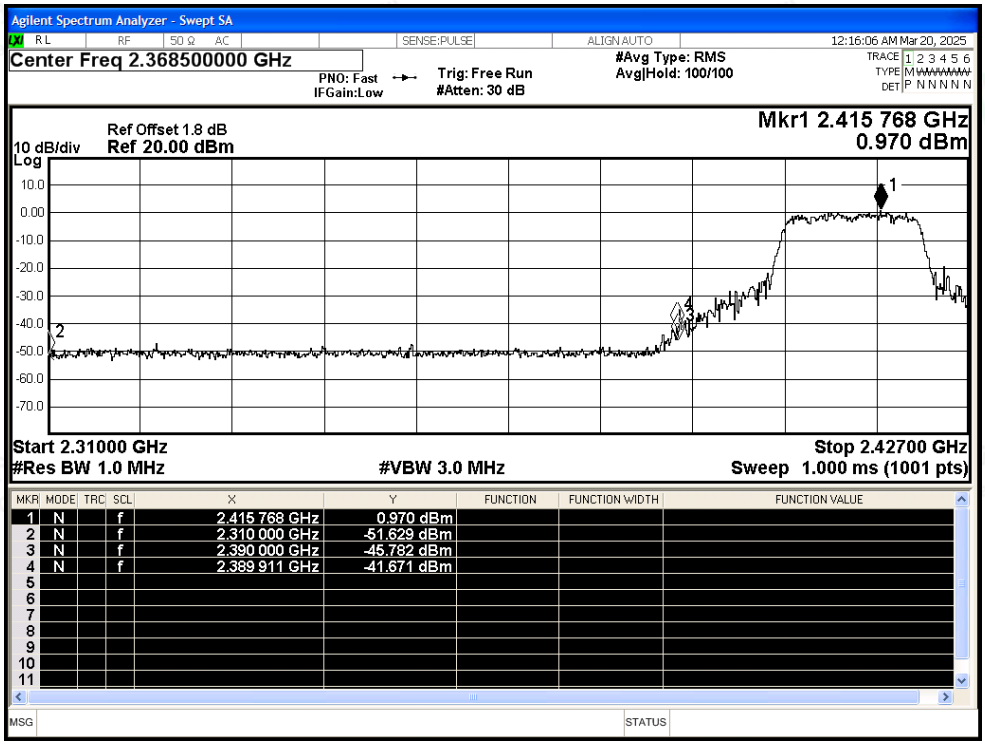

Restrict Band NVNT n20 2412MHz Ant1 Average

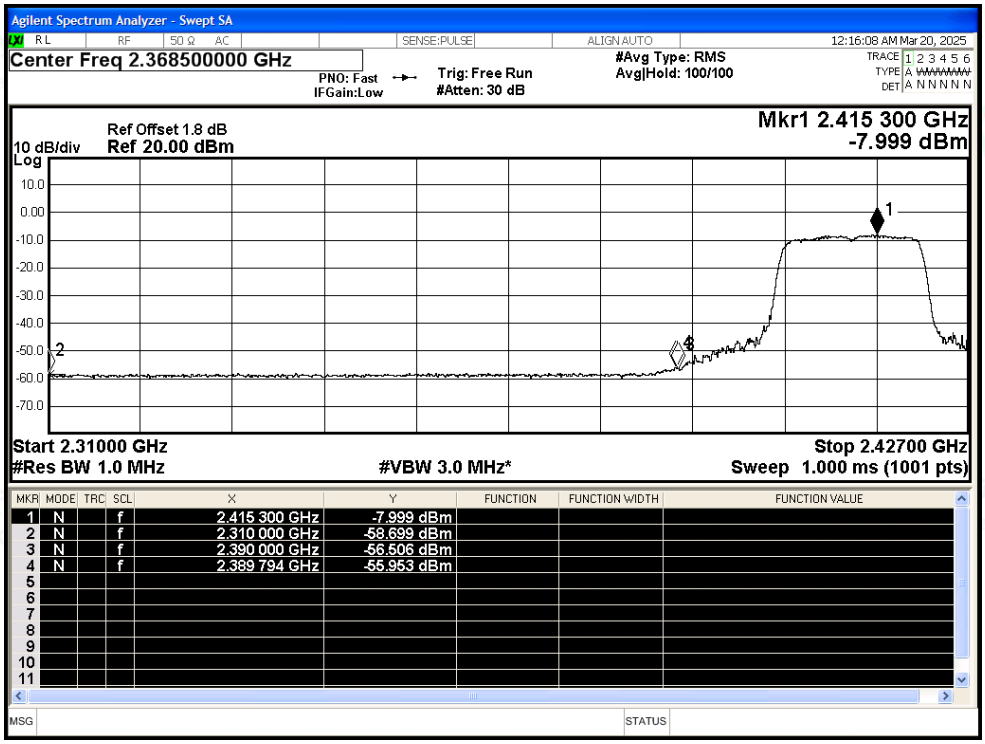

Restrict Band NVNT n20 2462MHz Ant1 Peak

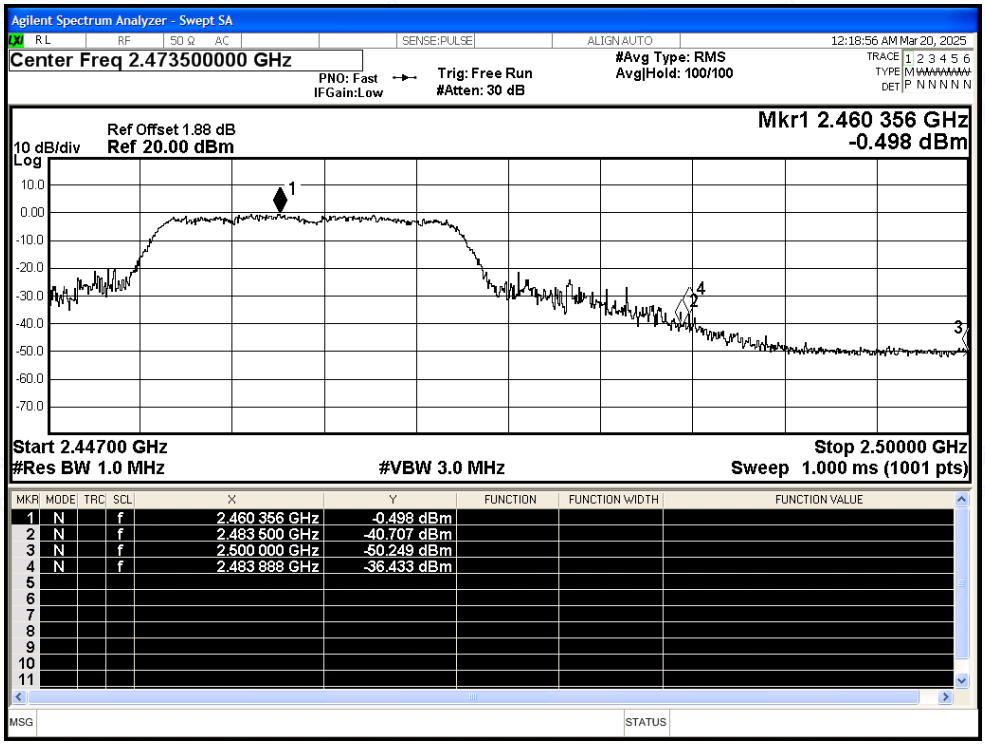
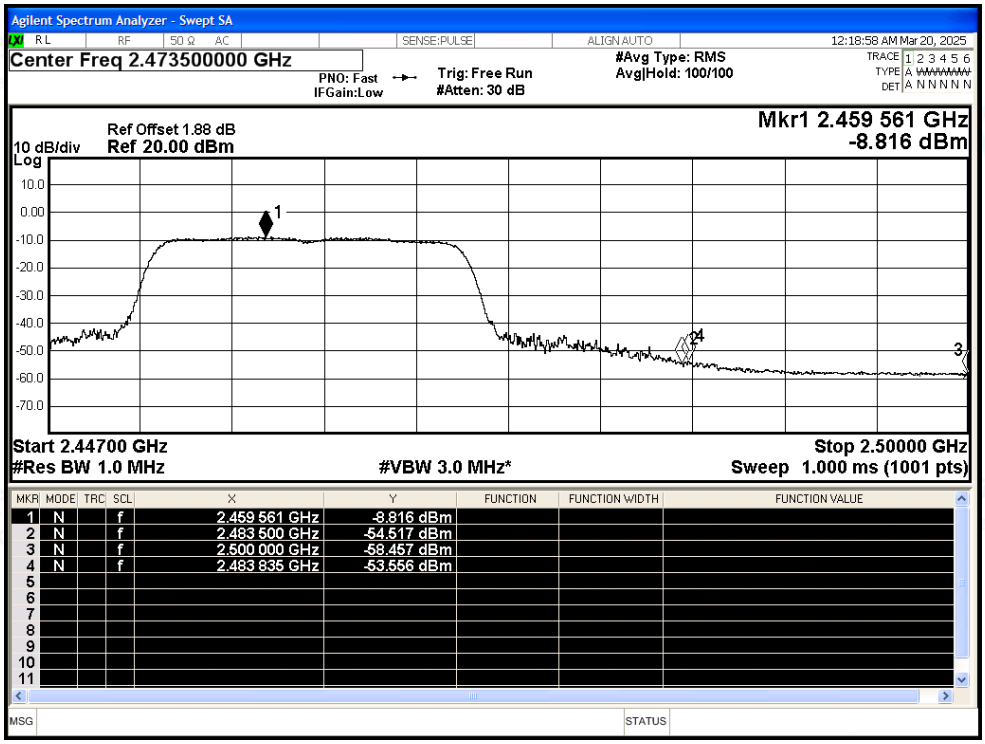
Restrict Band NVNT n20 2462MHz Ant1 Average