

Main Antenna Test Result

Project Number: P-CC26060547

Test Time: 2026-07-19_20.24.57

EUT Name: Tablet

Temp.(°C): 23.3

Model Number: Inventus SD1

Humidity (%RH): 52

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 ax20 CH45 P=5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT7

RE Test case FCC Part 15E FCC 15.407(5.925-6.425)_1GHz-18GHz

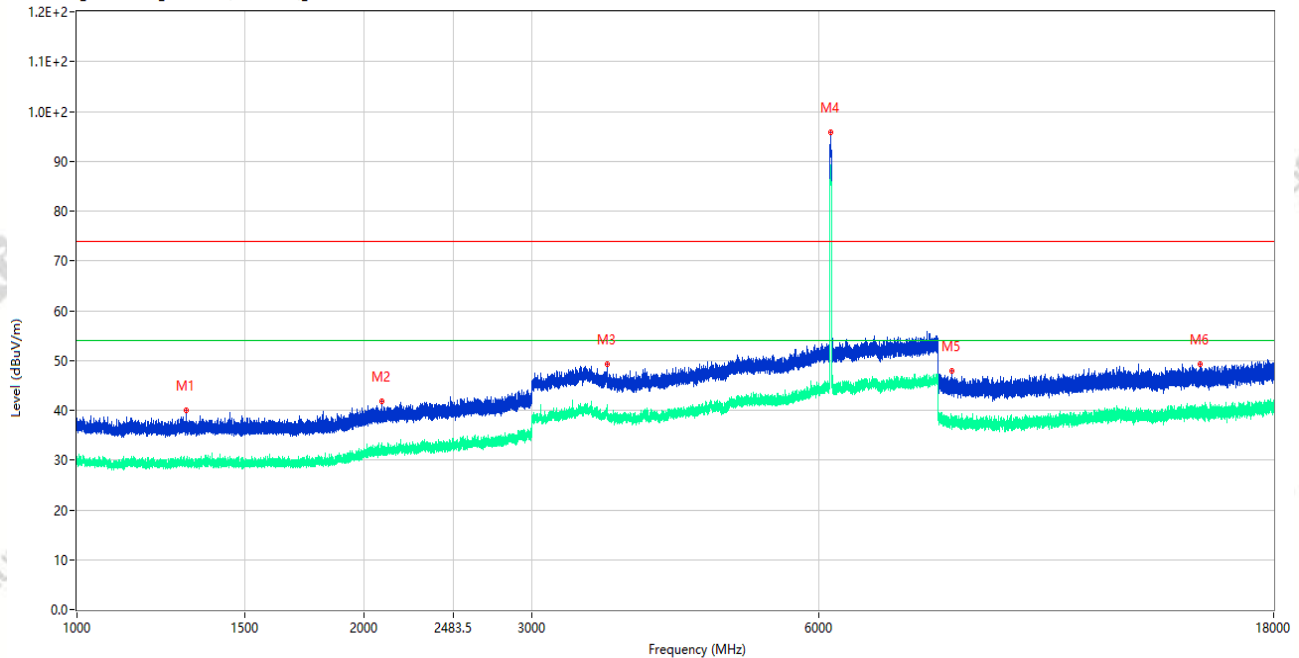

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1301.800	39.94	-15.59	74.0	34.06	Peak	163.00	150	Vertical	Pass
1**	1301.800	29.66	-15.59	54.0	24.34	AV	163.00	150	Vertical	Pass
2	2088.700	41.72	-13.68	74.0	32.28	Peak	85.00	150	Vertical	Pass
2**	2088.700	32.46	-13.68	54.0	21.54	AV	85.00	150	Vertical	Pass
3	3596.000	49.24	-5.13	74.0	24.76	Peak	5.00	150	Vertical	Pass
3**	3596.000	40.92	-5.13	54.0	13.08	AV	5.00	150	Vertical	Pass
4	6172.000	95.75	-0.42	74.0	-21.75	Peak	314.00	150	Vertical	N/A
4**	6172.000	88.61	-0.42	54.0	-34.61	AV	314.00	150	Vertical	N/A
5	8267.900	47.88	-4.76	74.0	26.12	Peak	193.00	150	Vertical	Pass
5**	8267.900	37.88	-4.76	54.0	16.12	AV	193.00	150	Vertical	Pass
6	15081.000	49.32	-1.80	74.0	24.68	Peak	347.00	150	Vertical	Pass
6**	15081.000	39.51	-1.80	54.0	14.49	AV	347.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-19_20.19.47

EUT Name: Tablet

Temp.(°C): 23.3

Model Number: Inventus SD1

Humidity (%RH): 52

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G ax20 CH45 P=5

Test Site: 966#2


Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08

ANT7

RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

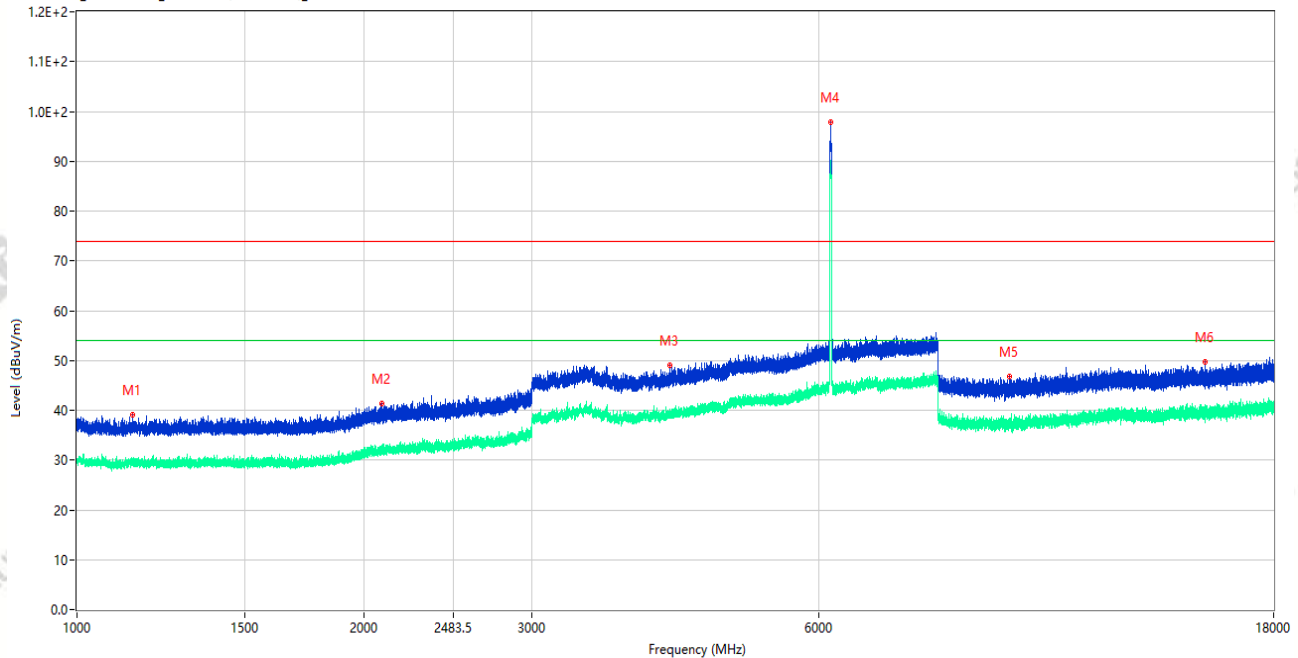

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1142.500	39.01	-15.58	74.0	34.99	Peak	257.00	150	Horizontal	Pass
1**	1142.500	29.53	-15.58	54.0	24.47	AV	257.00	150	Horizontal	Pass
2	2088.800	41.37	-13.68	74.0	32.63	Peak	321.00	150	Horizontal	Pass
2**	2088.800	31.69	-13.68	54.0	22.31	AV	321.00	150	Horizontal	Pass
3	4187.500	49.03	-3.81	74.0	24.97	Peak	212.00	150	Horizontal	Pass
3**	4187.500	39.30	-3.81	54.0	14.70	AV	212.00	150	Horizontal	Pass
4	6177.000	97.85	-0.58	74.0	-23.85	Peak	196.00	150	Horizontal	N/A
4**	6177.000	89.08	-0.58	54.0	-35.08	AV	196.00	150	Horizontal	N/A
5	9514.063	46.87	-2.93	74.0	27.13	Peak	121.00	150	Horizontal	Pass
5**	9514.063	37.89	-2.93	54.0	16.11	AV	121.00	150	Horizontal	Pass
6	15264.750	49.63	-1.02	74.0	24.37	Peak	210.00	150	Horizontal	Pass
6**	15264.750	39.52	-1.02	54.0	14.48	AV	210.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-19_20.31.23

EUT Name: Tablet

Temp.(°C): 23.3

Model Number: Inventus SD1

Humidity (%RH): 52

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 ax40 CH43 P=6


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT7

RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

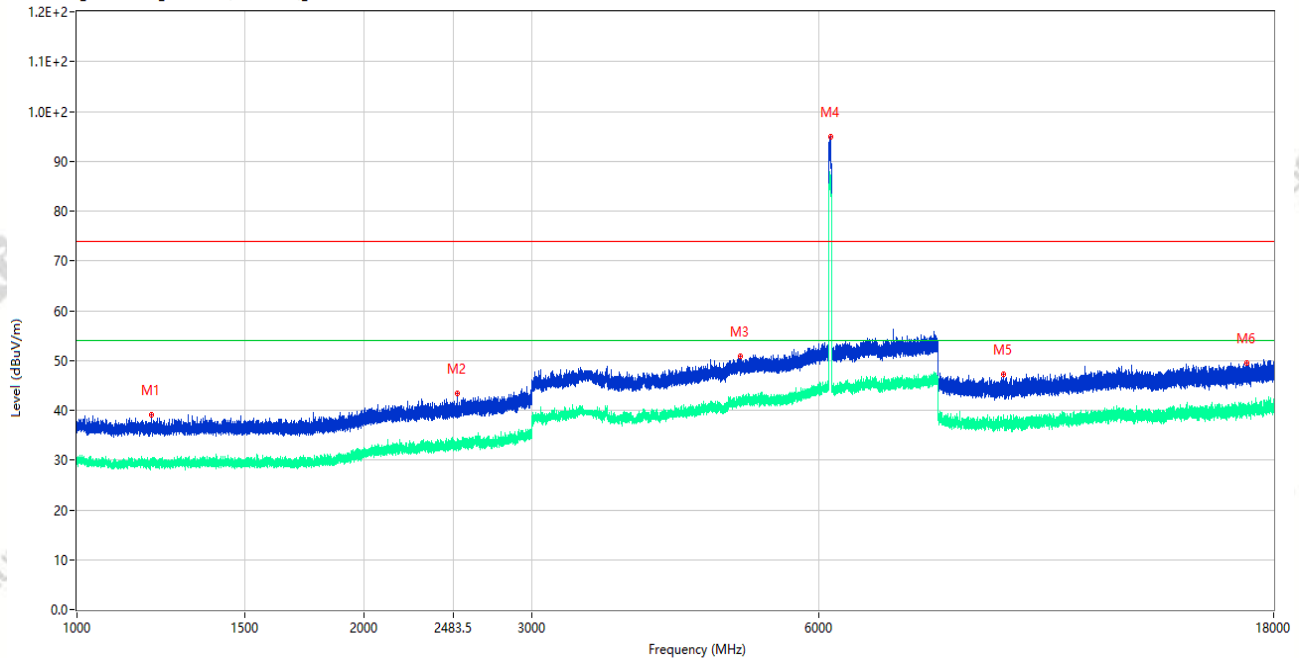


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.000	39.13	-15.71	74.0	34.87	Peak	45.00	150	Vertical	Pass
1**	1197.000	29.23	-15.71	54.0	24.77	AV	45.00	150	Vertical	Pass
2	2505.400	43.35	-11.91	74.0	30.65	Peak	185.00	150	Vertical	Pass
2**	2505.400	33.30	-11.91	54.0	20.70	AV	185.00	150	Vertical	Pass
3	4960.750	50.90	-2.00	74.0	23.10	Peak	144.00	150	Vertical	Pass
3**	4960.750	41.89	-2.00	54.0	12.11	AV	144.00	150	Vertical	Pass
4	6172.250	94.91	-0.43	74.0	-20.91	Peak	229.00	150	Vertical	N/A
4**	6172.250	85.91	-0.43	54.0	-31.91	AV	229.00	150	Vertical	N/A
5	9375.600	47.32	-4.74	74.0	26.68	Peak	286.00	150	Vertical	Pass
5**	9375.600	37.38	-4.74	54.0	16.62	AV	286.00	150	Vertical	Pass
6	16889.363	49.42	-0.59	74.0	24.58	Peak	212.00	150	Vertical	Pass
6**	16889.363	39.91	-0.59	54.0	14.09	AV	212.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-19_20.39.39

EUT Name:	Tablet	Temp.(°C):	23.3
Model Number:	Inventus SD1	Humidity (%RH):	52
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII5 ax40 CH43 P=6
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT7

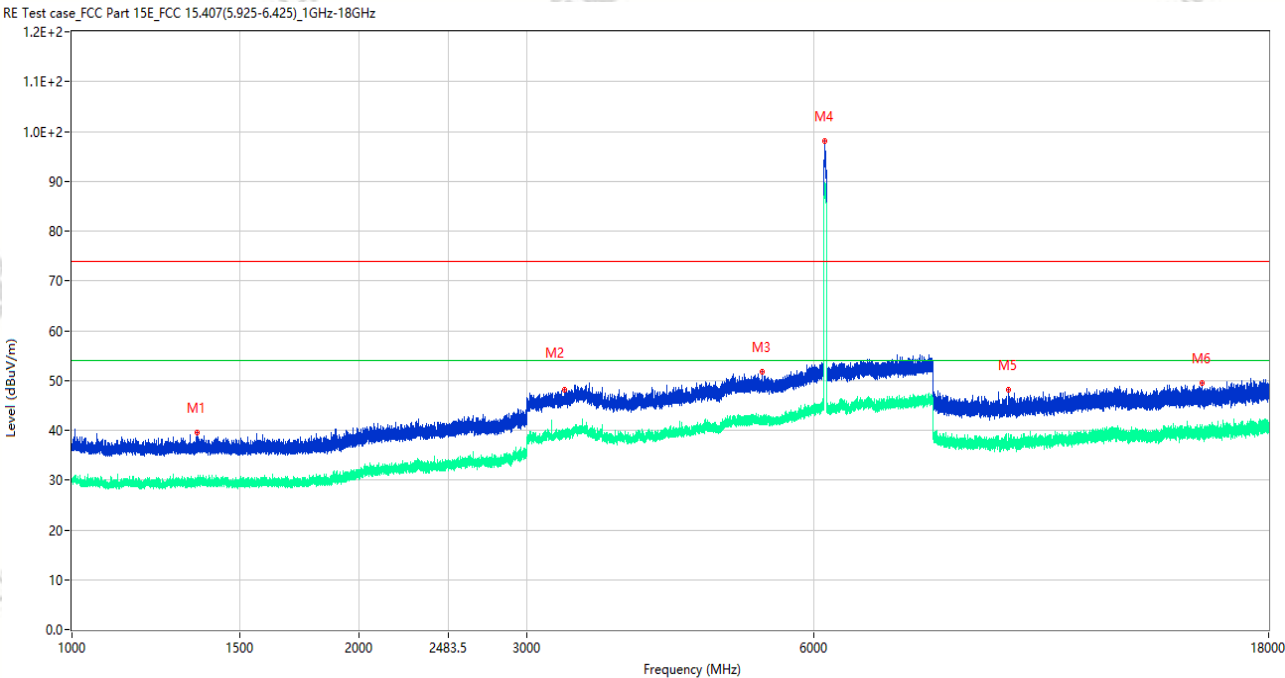


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1351.900	39.50	-15.91	74.0	34.50	Peak	185.00	150	Horizontal	Pass
1**	1351.900	29.30	-15.91	54.0	24.70	AV	185.00	150	Horizontal	Pass
2	3289.500	48.08	-6.77	74.0	25.92	Peak	215.00	150	Horizontal	Pass
2**	3289.500	39.15	-6.77	54.0	14.85	AV	215.00	150	Horizontal	Pass
3	5291.500	51.74	-1.97	74.0	22.26	Peak	145.00	150	Horizontal	Pass
3**	5291.500	41.90	-1.97	54.0	12.10	AV	145.00	150	Horizontal	Pass
4	6167.500	98.11	-0.36	74.0	-24.11	Peak	181.00	150	Horizontal	N/A
4**	6167.500	88.82	-0.36	54.0	-34.82	AV	181.00	150	Horizontal	N/A
5	9609.538	48.19	-3.21	74.0	25.81	Peak	0.00	150	Horizontal	Pass
5**	9609.538	38.23	-3.21	54.0	15.77	AV	0.00	150	Horizontal	Pass
6	15319.875	49.45	-2.49	74.0	24.55	Peak	111.00	150	Horizontal	Pass
6**	15319.875	39.16	-2.49	54.0	14.84	AV	111.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547
Test Time: 2026-07-19_20.55.27

EUT Name:	Tablet	Temp.(°C):	23.3
Model Number:	Inventus SD1	Humidity (%RH):	52
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII5 ax80 CH39 P=9.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT7

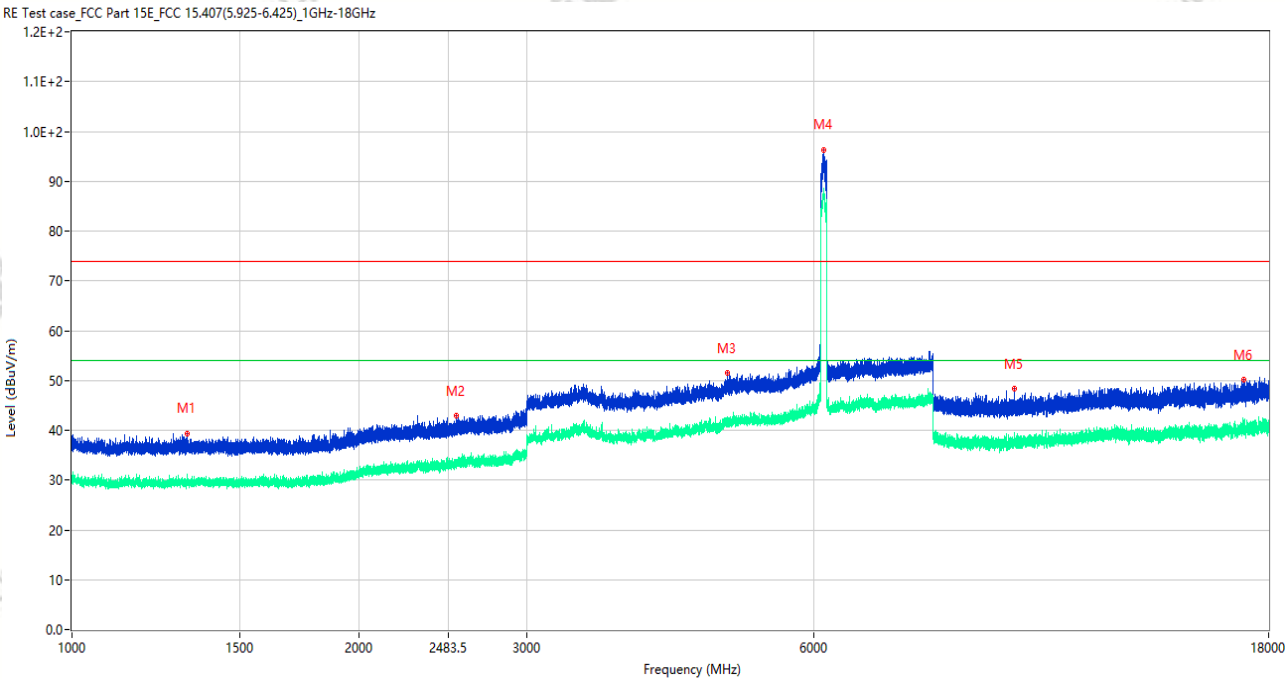

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1321.500	39.43	-15.89	74.0	34.57	Peak	359.00	150	Vertical	Pass
1**	1321.500	30.51	-15.89	54.0	23.49	AV	359.00	150	Vertical	Pass
2	2532.500	42.95	-11.23	74.0	31.05	Peak	161.00	150	Vertical	Pass
2**	2532.500	34.02	-11.23	54.0	19.98	AV	161.00	150	Vertical	Pass
3	4866.500	51.46	-2.10	74.0	22.54	Peak	274.00	150	Vertical	Pass
3**	4866.500	41.63	-2.10	54.0	12.37	AV	274.00	150	Vertical	Pass
4	6152.500	96.38	-0.20	74.0	-22.38	Peak	241.00	150	Vertical	N/A
4**	6152.500	86.48	-0.20	54.0	-32.48	AV	241.00	150	Vertical	N/A
5	9733.512	48.34	-4.10	74.0	25.66	Peak	147.00	150	Vertical	Pass
5**	9733.512	38.47	-4.10	54.0	15.53	AV	147.00	150	Vertical	Pass
6	16960.500	50.20	-0.93	74.0	23.80	Peak	0.00	150	Vertical	Pass
6**	16960.500	40.63	-0.93	54.0	13.37	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-19_20.51.34

EUT Name: Tablet

Temp.(°C): 23.3

Model Number: Inventus SD1

Humidity (%RH): 52

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 ax80 CH39 P=9.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT7

RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

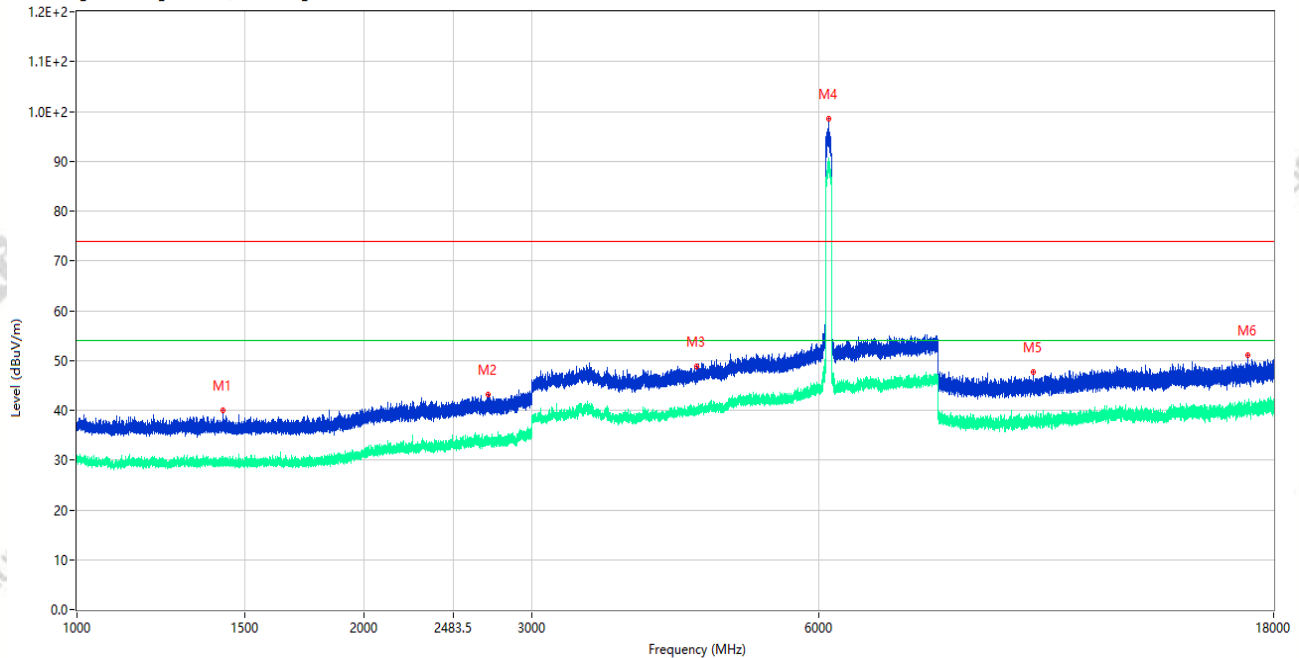

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1422.800	39.91	-15.94	74.0	34.09	Peak	284.00	150	Horizontal	Pass
1**	1422.800	29.00	-15.94	54.0	25.00	AV	284.00	150	Horizontal	Pass
2	2700.300	43.07	-10.52	74.0	30.93	Peak	0.00	150	Horizontal	Pass
2**	2700.300	34.11	-10.52	54.0	19.89	AV	0.00	150	Horizontal	Pass
3	4463.000	48.87	-3.58	74.0	25.13	Peak	12.00	150	Horizontal	Pass
3**	4463.000	40.34	-3.58	54.0	13.66	AV	12.00	150	Horizontal	Pass
4	6150.750	98.57	-0.17	74.0	-24.57	Peak	144.00	150	Horizontal	N/A
4**	6150.750	89.64	-0.17	54.0	-35.64	AV	144.00	150	Horizontal	N/A
5	10081.212	47.77	-3.83	74.0	26.23	Peak	240.00	150	Horizontal	Pass
5**	10081.212	37.63	-3.83	54.0	16.37	AV	240.00	150	Horizontal	Pass
6	16909.838	50.96	-0.58	74.0	23.04	Peak	346.00	150	Horizontal	Pass
6**	16909.838	41.48	-0.58	54.0	12.52	AV	346.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-19_21.01.11

EUT Name: Tablet

Temp.(°C): 23.3

Model Number: Inventus SD1

Humidity (%RH): 52

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 ax160 CH47 P=13


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT7

RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

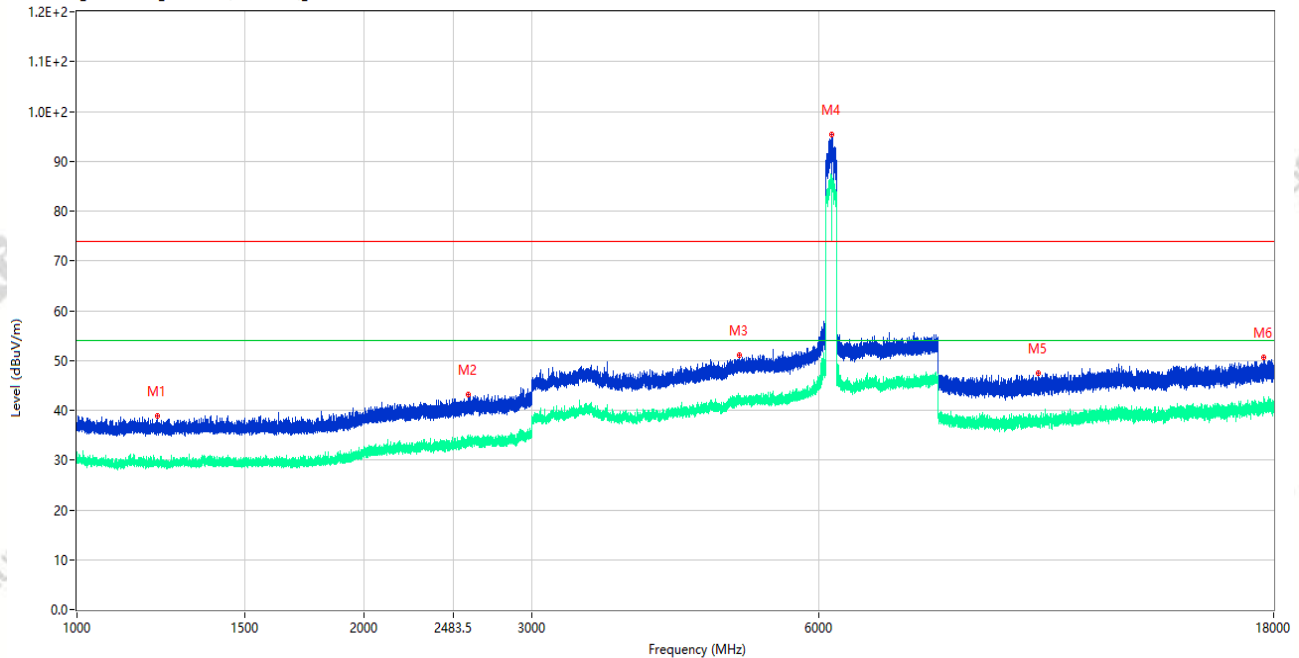


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1215.800	38.88	-15.97	74.0	35.12	Peak	263.00	150	Vertical	Pass
1**	1215.800	29.76	-15.97	54.0	24.24	AV	263.00	150	Vertical	Pass
2	2575.600	43.14	-10.71	74.0	30.86	Peak	172.00	150	Vertical	Pass
2**	2575.600	34.47	-10.71	54.0	19.53	AV	172.00	150	Vertical	Pass
3	4955.500	50.97	-1.75	74.0	23.03	Peak	313.00	150	Vertical	Pass
3**	4955.500	42.46	-1.75	54.0	11.54	AV	313.00	150	Vertical	Pass
4	6187.500	95.26	-0.67	74.0	-21.26	Peak	245.00	150	Vertical	N/A
4**	6187.500	86.65	-0.67	54.0	-32.65	AV	245.00	150	Vertical	N/A
5	10194.975	47.38	-3.44	74.0	26.62	Peak	170.00	150	Vertical	Pass
5**	10194.975	37.42	-3.44	54.0	16.58	AV	170.00	150	Vertical	Pass
6	17592.863	50.53	0.66	74.0	23.47	Peak	245.00	150	Vertical	Pass
6**	17592.863	41.43	0.66	54.0	12.57	AV	245.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547
Test Time: 2026-07-19_21.05.01

EUT Name:	Tablet	Temp.(°C):	23.3
Model Number:	Inventus SD1	Humidity (%RH):	52
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII5 ax160 CH47 P=13
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT7

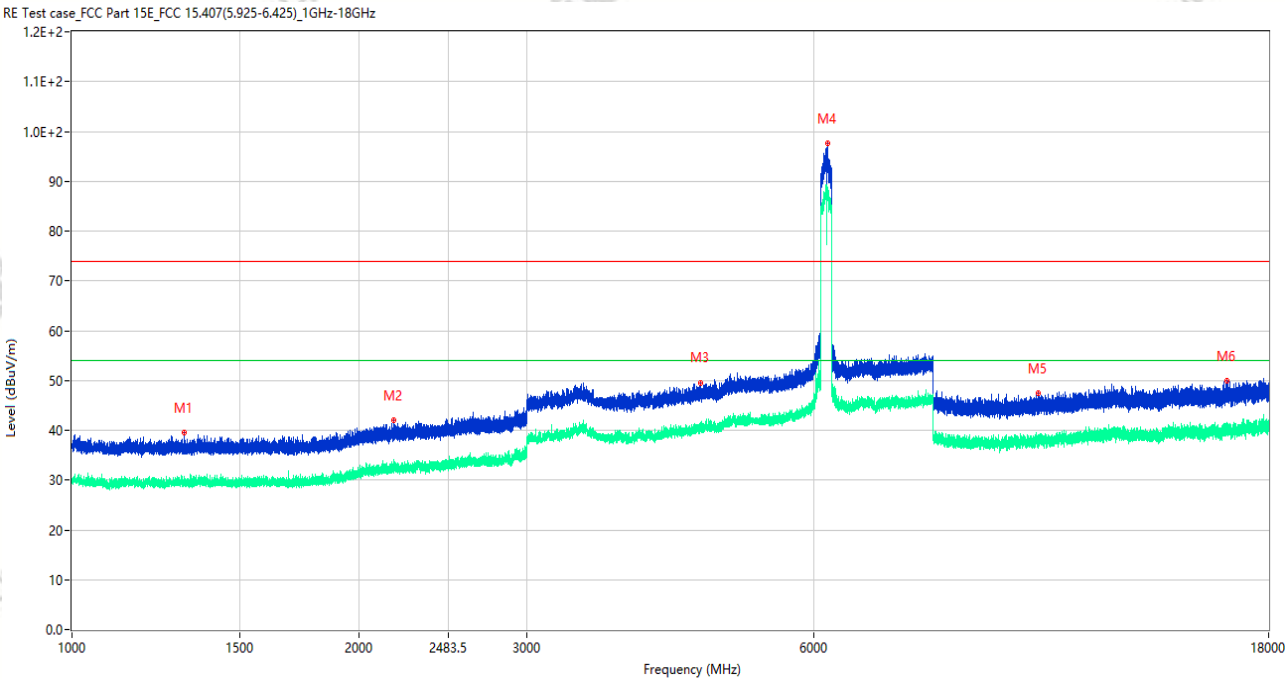

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1312.400	39.63	-15.82	74.0	34.37	Peak	224.00	150	Horizontal	Pass
1**	1312.400	29.35	-15.82	54.0	24.65	AV	224.00	150	Horizontal	Pass
2	2174.900	41.98	-12.93	74.0	32.02	Peak	241.00	150	Horizontal	Pass
2**	2174.900	34.09	-12.93	54.0	19.91	AV	241.00	150	Horizontal	Pass
3	4559.500	49.60	-2.70	74.0	24.40	Peak	313.00	150	Horizontal	Pass
3**	4559.500	41.26	-2.70	54.0	12.74	AV	313.00	150	Horizontal	Pass
4	6205.500	97.54	-0.83	74.0	-23.54	Peak	193.00	150	Horizontal	N/A
4**	6205.500	87.21	-0.83	54.0	-33.21	AV	193.00	150	Horizontal	N/A
5	10329.400	47.36	-3.18	74.0	26.64	Peak	351.00	150	Horizontal	Pass
5**	10329.400	39.06	-3.18	54.0	14.94	AV	351.00	150	Horizontal	Pass
6	16287.188	49.98	-1.38	74.0	24.02	Peak	9.00	150	Horizontal	Pass
6**	16287.188	41.19	-1.38	54.0	12.81	AV	9.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_17.44.58

EUT Name:	Tablet	Temp.(°C):	23.1
Model Number:	Inventus SD1	Humidity (%RH):	54
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII5 be20 CH45 P=4.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT7

RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

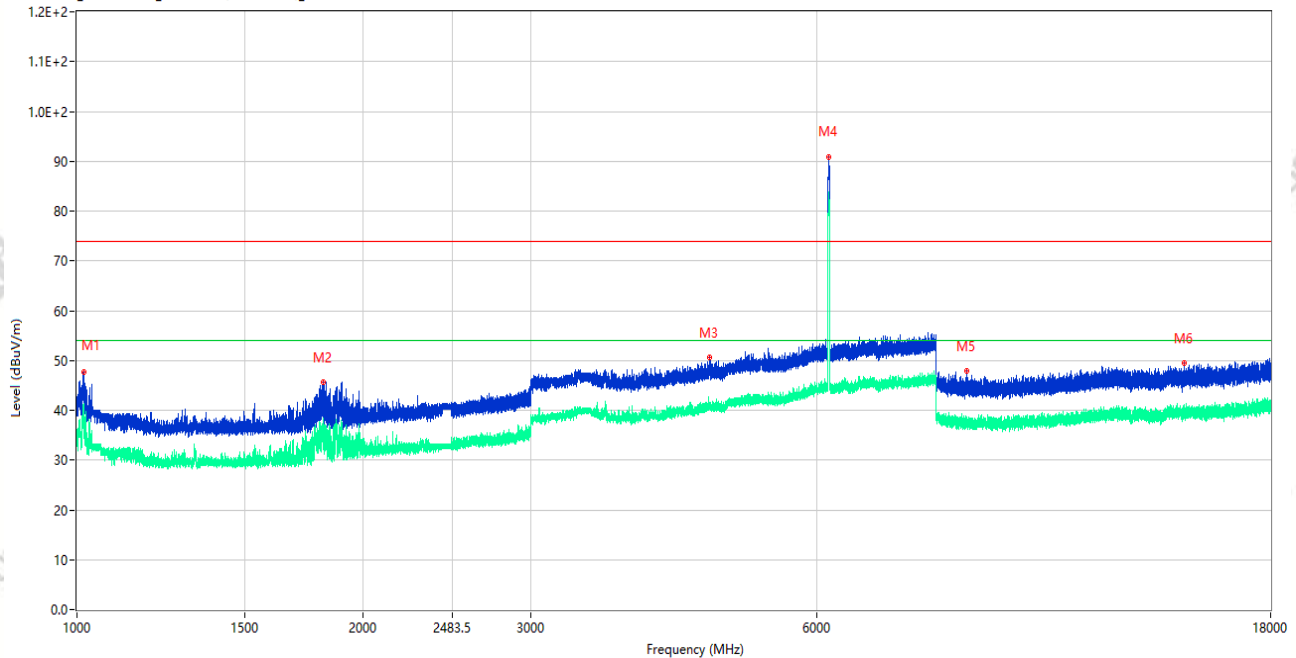

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1016.300	47.62	-14.77	74.0	26.38	Peak	65.00	150	Vertical	Pass
1**	1016.300	39.42	-14.77	54.0	14.58	AV	65.00	150	Vertical	Pass
2	1816.500	45.69	-16.01	74.0	28.31	Peak	187.00	150	Vertical	Pass
2**	1816.500	33.42	-16.01	54.0	20.58	AV	187.00	150	Vertical	Pass
3	4630.500	50.51	-2.65	74.0	23.49	Peak	279.00	150	Vertical	Pass
3**	4630.500	41.29	-2.65	54.0	12.71	AV	279.00	150	Vertical	Pass
4	6171.750	90.96	-0.42	74.0	-16.96	Peak	246.00	150	Vertical	N/A
4**	6171.750	81.74	-0.42	54.0	-27.74	AV	246.00	150	Vertical	N/A
5	8628.662	47.85	-5.49	74.0	26.15	Peak	0.00	150	Vertical	Pass
5**	8628.662	37.85	-5.49	54.0	16.15	AV	0.00	150	Vertical	Pass
6	14594.588	49.48	-2.26	74.0	24.52	Peak	180.00	150	Vertical	Pass
6**	14594.588	40.43	-2.26	54.0	13.57	AV	180.00	150	Vertical	Pass


Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_17.40.46

EUT Name:	Tablet	Temp.(°C):	23.1
Model Number:	Inventus SD1	Humidity (%RH):	54
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII5 be20 CH45 P=4.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT7

RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

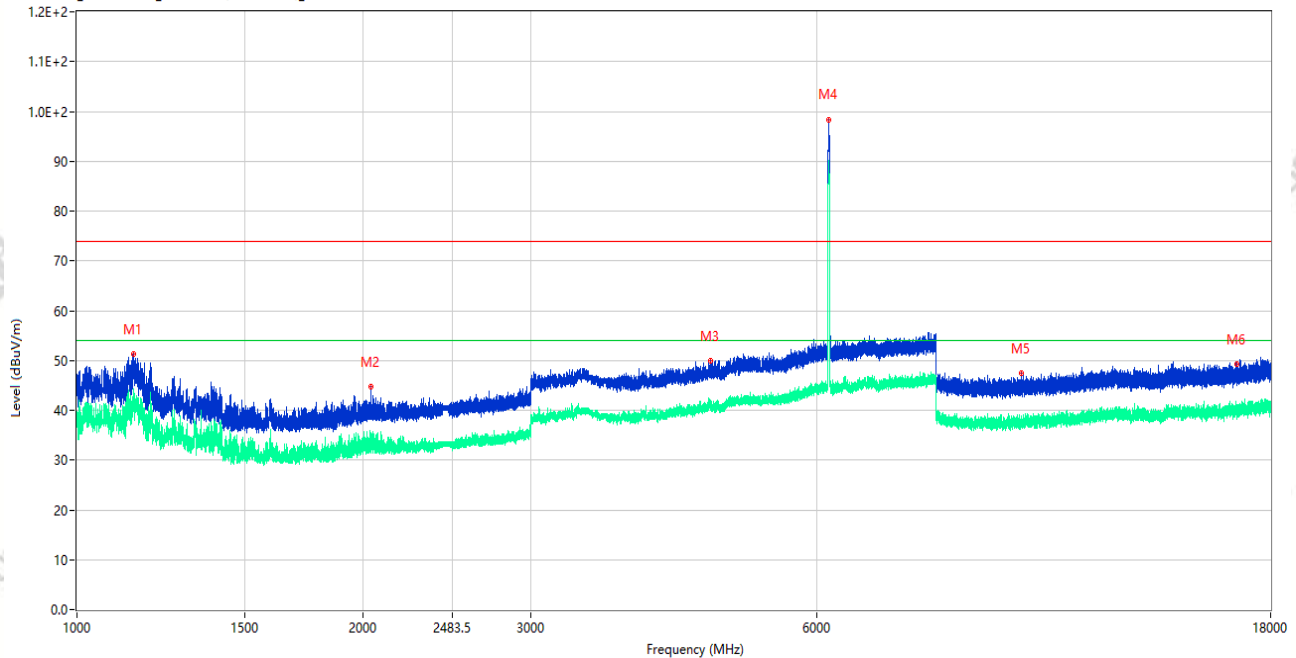

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1147.200	51.33	-15.67	74.0	22.67	Peak	65.00	150	Horizontal	Pass
1**	1147.200	41.01	-15.67	54.0	12.99	AV	65.00	150	Horizontal	Pass
2	2038.900	44.64	-13.27	74.0	29.36	Peak	149.00	150	Horizontal	Pass
2**	2038.900	35.23	-13.27	54.0	18.77	AV	149.00	150	Horizontal	Pass
3	4640.750	49.98	-3.12	74.0	24.02	Peak	360.00	150	Horizontal	Pass
3**	4640.750	39.89	-3.12	54.0	14.11	AV	360.00	150	Horizontal	Pass
4	6171.750	98.40	-0.42	74.0	-24.40	Peak	211.00	150	Horizontal	N/A
4**	6171.750	88.98	-0.42	54.0	-34.98	AV	211.00	150	Horizontal	N/A
5	9849.413	47.39	-4.07	74.0	26.61	Peak	120.00	150	Horizontal	Pass
5**	9849.413	37.79	-4.07	54.0	16.21	AV	120.00	150	Horizontal	Pass
6	16572.787	49.30	-0.73	74.0	24.70	Peak	310.00	150	Horizontal	Pass
6**	16572.787	39.76	-0.73	54.0	14.24	AV	310.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_17.24.03

EUT Name: Tablet

Temp.(°C): 23.1

Model Number: Inventus SD1

Humidity (%RH): 54

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 be40 CH43 P=6


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT7

RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

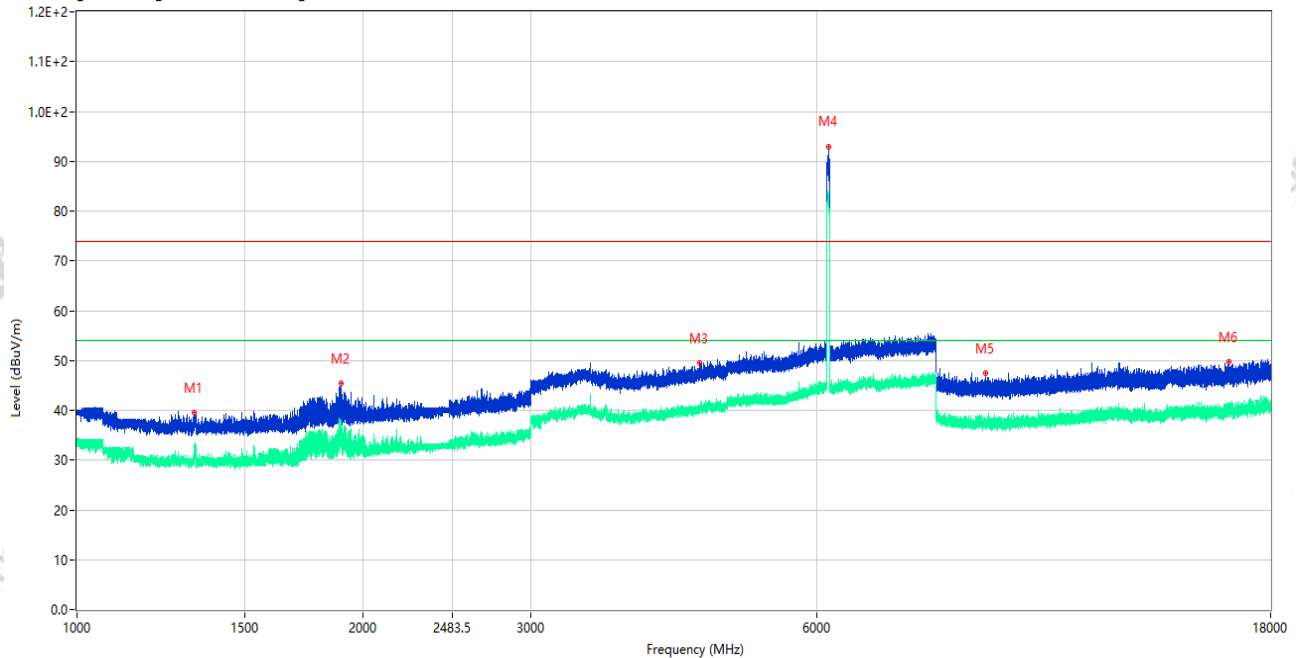

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.600	39.44	-15.92	74.0	34.56	Peak	185.00	150	Vertical	Pass
1**	1327.600	31.33	-15.92	54.0	22.67	AV	185.00	150	Vertical	Pass
2	1894.300	45.32	-15.42	74.0	28.68	Peak	206.00	150	Vertical	Pass
2**	1894.300	34.49	-15.42	54.0	19.51	AV	206.00	150	Vertical	Pass
3	4511.250	49.42	-3.15	74.0	24.58	Peak	264.00	150	Vertical	Pass
3**	4511.250	40.11	-3.15	54.0	13.89	AV	264.00	150	Vertical	Pass
4	6169.000	92.98	-0.38	74.0	-18.98	Peak	313.00	150	Vertical	N/A
4**	6169.000	83.35	-0.38	54.0	-29.35	AV	313.00	150	Vertical	N/A
5	9024.338	47.35	-4.30	74.0	26.65	Peak	6.00	150	Vertical	Pass
5**	9024.338	38.13	-4.30	54.0	15.87	AV	6.00	150	Vertical	Pass
6	16268.812	49.70	-1.78	74.0	24.30	Peak	0.00	150	Vertical	Pass
6**	16268.812	40.01	-1.78	54.0	13.99	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_17.31.24

EUT Name: Tablet

Temp.(°C): 23.1

Model Number: Inventus SD1

Humidity (%RH): 54

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 be40 CH43 P=6

Test Site: 966#2


Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08

ANT7

RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

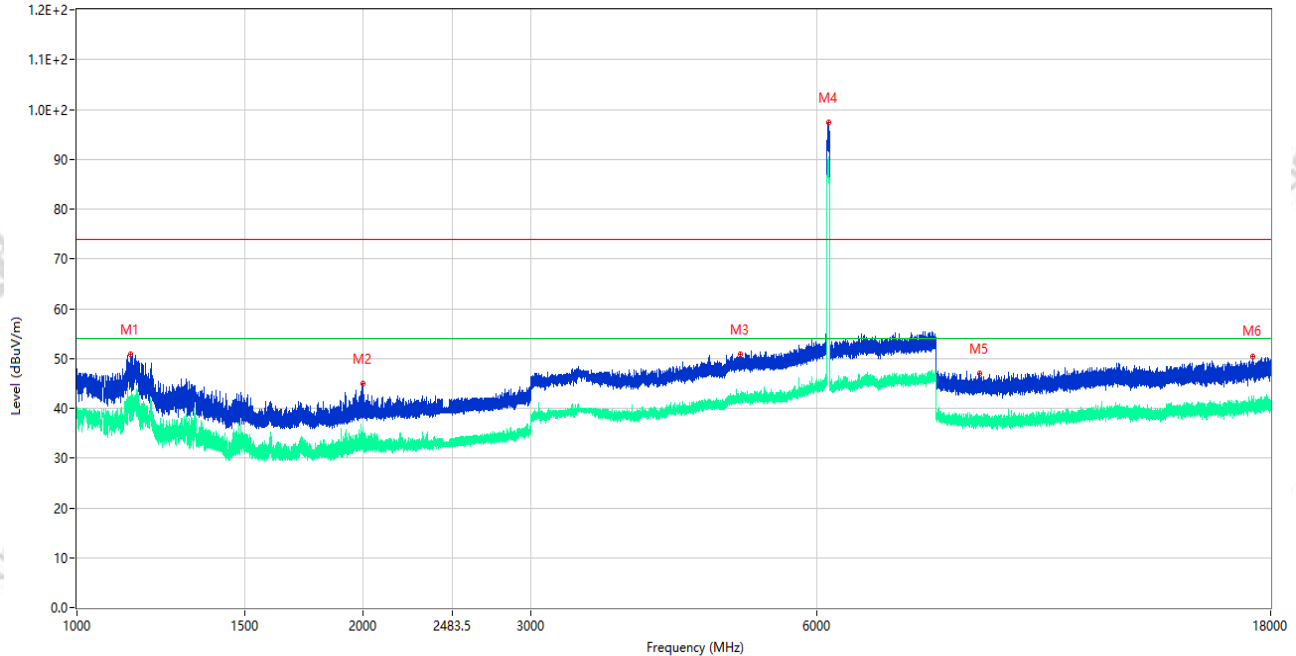

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1138.900	50.80	-15.54	74.0	23.20	Peak	258.00	150	Horizontal	Pass
1**	1138.900	40.42	-15.54	54.0	13.58	AV	258.00	150	Horizontal	Pass
2	1999.400	44.86	-14.32	74.0	29.14	Peak	146.00	150	Horizontal	Pass
2**	1999.400	32.11	-14.32	54.0	21.89	AV	146.00	150	Horizontal	Pass
3	4978.500	50.81	-2.56	74.0	23.19	Peak	248.00	150	Horizontal	Pass
3**	4978.500	42.12	-2.56	54.0	11.88	AV	248.00	150	Horizontal	Pass
4	6167.500	97.46	-0.36	74.0	-23.46	Peak	148.00	150	Horizontal	N/A
4**	6167.500	90.31	-0.36	54.0	-36.31	AV	148.00	150	Horizontal	N/A
5	8897.750	47.03	-4.84	74.0	26.97	Peak	0.00	150	Horizontal	Pass
5**	8897.750	37.24	-4.84	54.0	16.76	AV	0.00	150	Horizontal	Pass
6	17256.073	50.32	-0.97	74.0	23.68	Peak	173.00	150	Horizontal	Pass
6**	17256.073	40.95	-0.97	54.0	13.05	AV	173.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_17.51.02

EUT Name: Tablet

Temp.(°C): 23.1

Model Number: Inventus SD1

Humidity (%RH): 54

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 be80 CH39 P=9

Test Site: 966#2


Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08

ANT7

RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

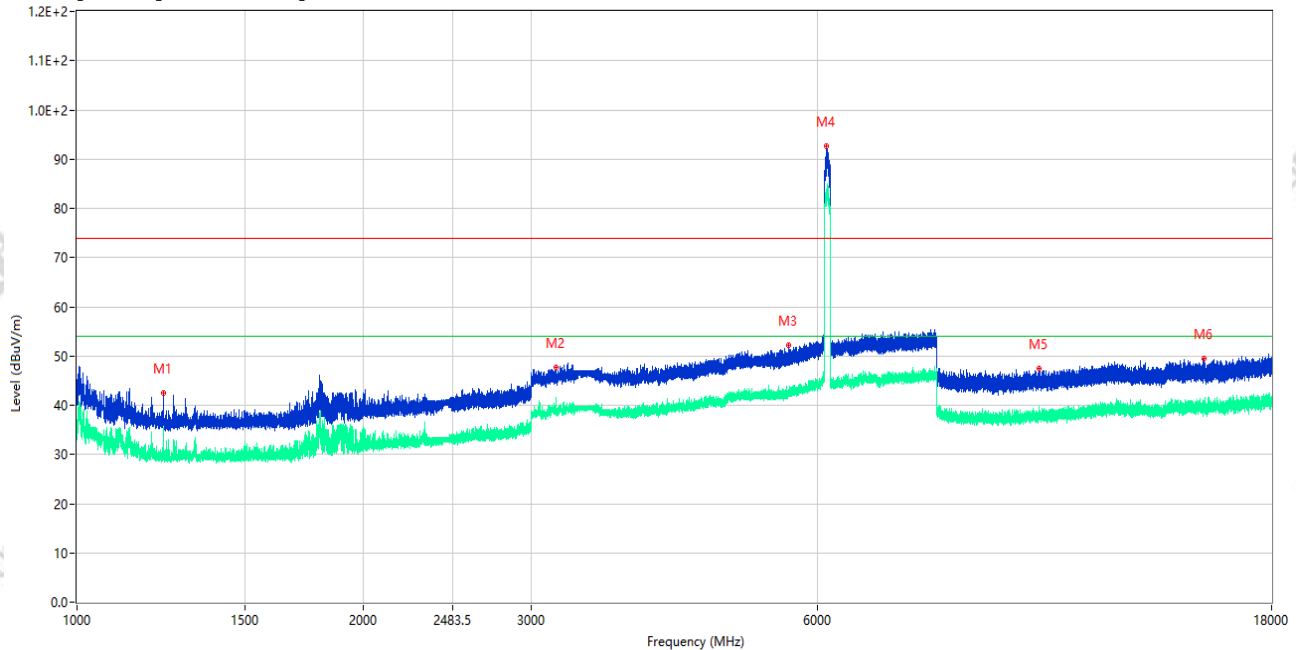

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1232.900	42.45	-15.99	74.0	31.55	Peak	221.00	150	Vertical	Pass
1**	1232.900	35.32	-15.99	54.0	18.68	AV	221.00	150	Vertical	Pass
2	3184.750	47.60	-7.55	74.0	26.40	Peak	75.00	150	Vertical	Pass
2**	3184.750	38.25	-7.55	54.0	15.75	AV	75.00	150	Vertical	Pass
3	5599.750	52.10	-2.77	74.0	21.90	Peak	12.00	150	Vertical	Pass
3**	5599.750	43.08	-2.77	54.0	10.92	AV	12.00	150	Vertical	Pass
4	6136.750	92.63	-0.43	74.0	-18.63	Peak	295.00	150	Vertical	N/A
4**	6136.750	83.12	-0.43	54.0	-29.12	AV	295.00	150	Vertical	N/A
5	10252.925	47.53	-3.17	74.0	26.47	Peak	123.00	150	Vertical	Pass
5**	10252.925	38.26	-3.17	54.0	15.74	AV	123.00	150	Vertical	Pass
6	15280.238	49.57	-1.69	74.0	24.43	Peak	210.00	150	Vertical	Pass
6**	15280.238	39.51	-1.69	54.0	14.49	AV	210.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_17.55.15

EUT Name: Tablet

Temp.(°C): 23.1

Model Number: Inventus SD1

Humidity (%RH): 54

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 be80 CH39 P=9

Test Site: 966#2


Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08

ANT7

RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

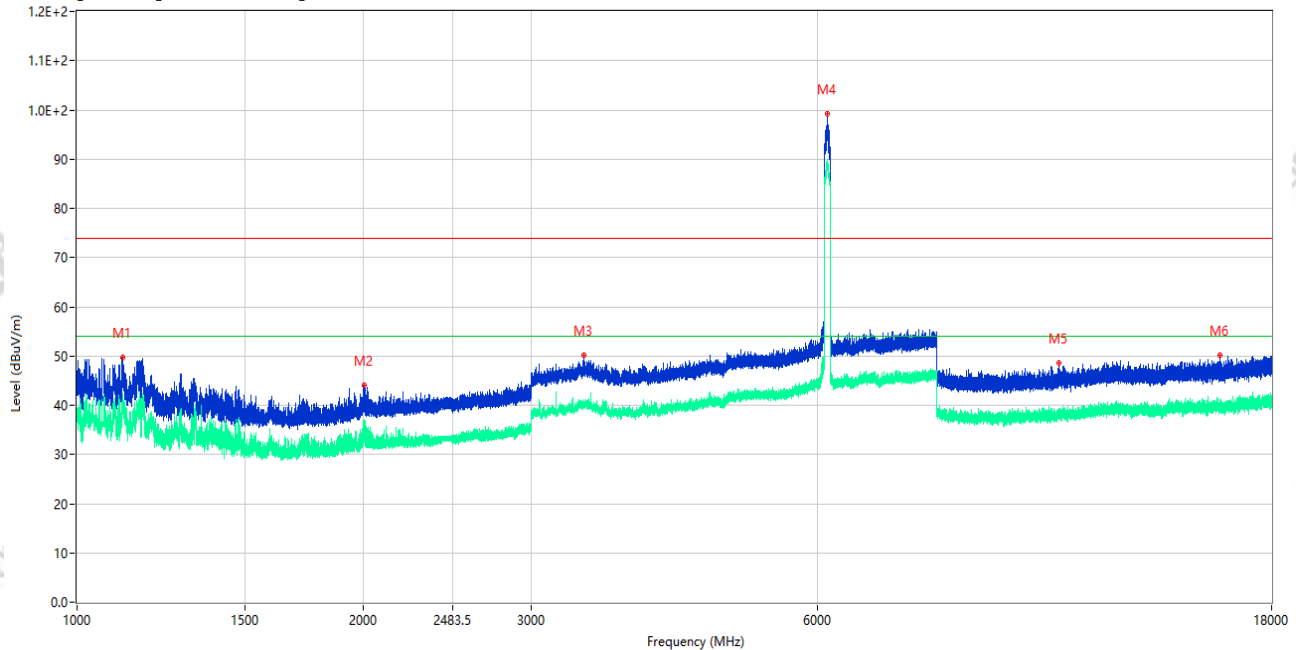

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1117.000	49.70	-15.79	74.0	24.30	Peak	72.00	150	Horizontal	Pass
1**	1117.000	39.75	-15.79	54.0	14.25	AV	72.00	150	Horizontal	Pass
2	2003.300	44.00	-14.22	74.0	30.00	Peak	137.00	150	Horizontal	Pass
2**	2003.300	35.47	-14.22	54.0	18.53	AV	137.00	150	Horizontal	Pass
3	3408.500	50.16	-5.36	74.0	23.84	Peak	1.00	150	Horizontal	Pass
3**	3408.500	40.28	-5.36	54.0	13.72	AV	1.00	150	Horizontal	Pass
4	6146.500	99.17	-0.22	74.0	-25.17	Peak	162.00	150	Horizontal	N/A
4**	6146.500	88.74	-0.22	54.0	-34.74	AV	162.00	150	Horizontal	N/A
5	10765.924	48.54	-3.49	74.0	25.46	Peak	359.00	150	Horizontal	Pass
5**	10765.924	37.75	-3.49	54.0	16.25	AV	359.00	150	Horizontal	Pass
6	15882.675	50.11	-1.45	74.0	23.89	Peak	278.00	150	Horizontal	Pass
6**	15882.675	40.43	-1.45	54.0	13.57	AV	278.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_18.06.17

EUT Name:	Tablet	Temp.(°C):	23.1
Model Number:	Inventus SD1	Humidity (%RH):	54
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII5 be160 CH47 P=13
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT7

RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

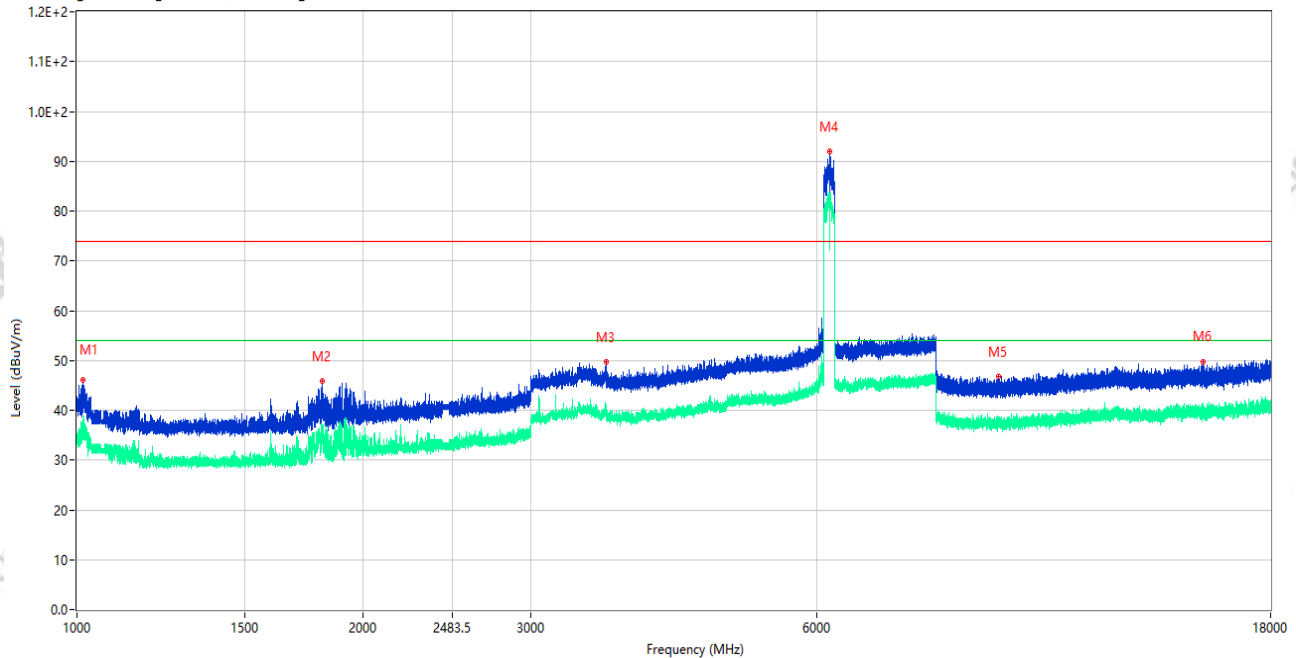

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1015.300	46.04	-14.66	74.0	27.96	Peak	88.00	150	Vertical	Pass
1**	1015.300	37.65	-14.66	54.0	16.35	AV	88.00	150	Vertical	Pass
2	1812.700	45.79	-16.01	74.0	28.21	Peak	182.00	150	Vertical	Pass
2**	1812.700	35.60	-16.01	54.0	18.40	AV	182.00	150	Vertical	Pass
3	3599.750	49.65	-4.98	74.0	24.35	Peak	144.00	150	Vertical	Pass
3**	3599.750	40.40	-4.98	54.0	13.60	AV	144.00	150	Vertical	Pass
4	6187.250	91.90	-0.68	74.0	-17.90	Peak	312.00	150	Vertical	N/A
4**	6187.250	83.34	-0.68	54.0	-29.34	AV	312.00	150	Vertical	N/A
5	9303.875	46.85	-5.42	74.0	27.15	Peak	124.00	150	Vertical	Pass
5**	9303.875	37.60	-5.42	54.0	16.40	AV	124.00	150	Vertical	Pass
6	15298.088	49.82	-1.85	74.0	24.18	Peak	245.00	150	Vertical	Pass
6**	15298.088	40.05	-1.85	54.0	13.95	AV	245.00	150	Vertical	Pass


Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_18.00.32

EUT Name:	Tablet	Temp.(°C):	23.1
Model Number:	Inventus SD1	Humidity (%RH):	54
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII5 be160 CH47 P=13
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT7

RE Test case FCC Part 15E FCC 15.407(5.925-6.425)_1GHz-18GHz

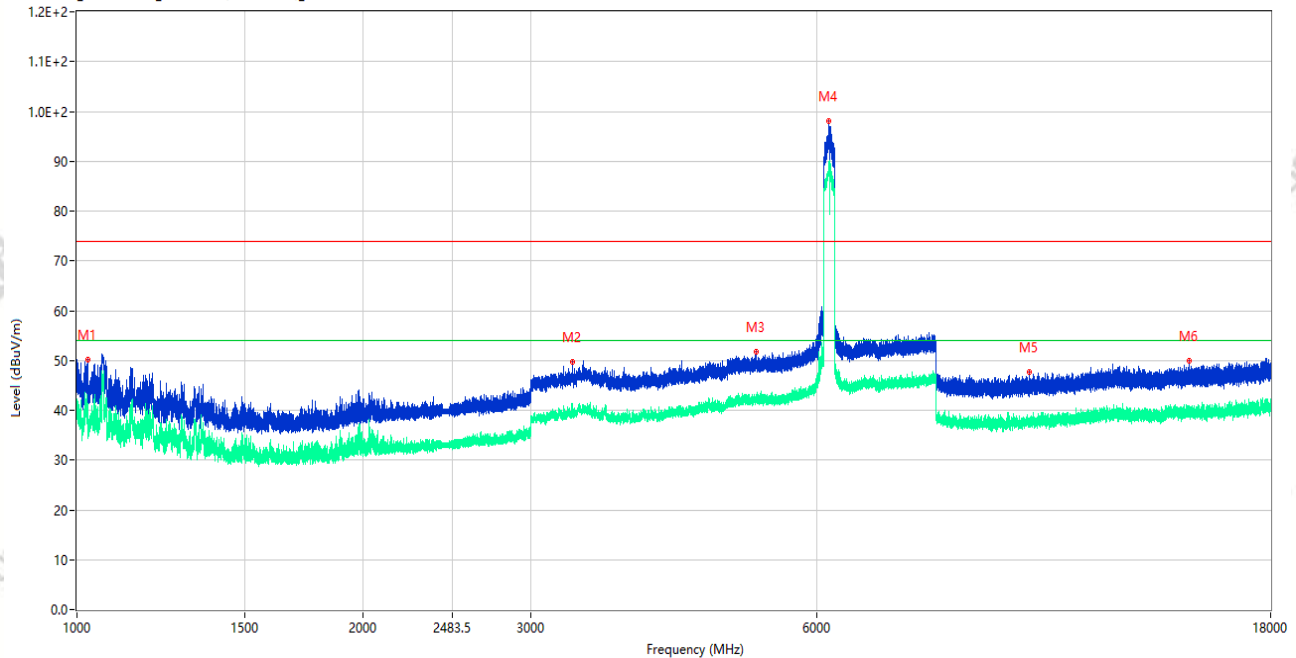

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1026.000	50.09	-15.36	74.0	23.91	Peak	102.00	150	Horizontal	Pass
1**	1026.000	38.15	-15.36	54.0	15.85	AV	102.00	150	Horizontal	Pass
2	3316.500	49.65	-6.38	74.0	24.35	Peak	126.00	150	Horizontal	Pass
2**	3316.500	40.99	-6.38	54.0	13.01	AV	126.00	150	Horizontal	Pass
3	5181.500	51.65	-2.34	74.0	22.35	Peak	358.00	150	Horizontal	Pass
3**	5181.500	41.87	-2.34	54.0	12.13	AV	358.00	150	Horizontal	Pass
4	6178.750	98.03	-0.63	74.0	-24.03	Peak	144.00	150	Horizontal	N/A
4**	6178.750	87.65	-0.63	54.0	-33.65	AV	144.00	150	Horizontal	N/A
5	10028.724	47.62	-4.23	74.0	26.38	Peak	169.00	150	Horizontal	Pass
5**	10028.724	37.51	-4.23	54.0	16.49	AV	169.00	150	Horizontal	Pass
6	14775.975	49.90	-0.82	74.0	24.10	Peak	0.00	150	Horizontal	Pass
6**	14775.975	40.19	-0.82	54.0	13.81	AV	0.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_18.12.08

EUT Name:	Tablet	Temp.(°C):	23.1
Model Number:	Inventus SD1	Humidity (%RH):	54
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII5 be320 CH63 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT7

RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

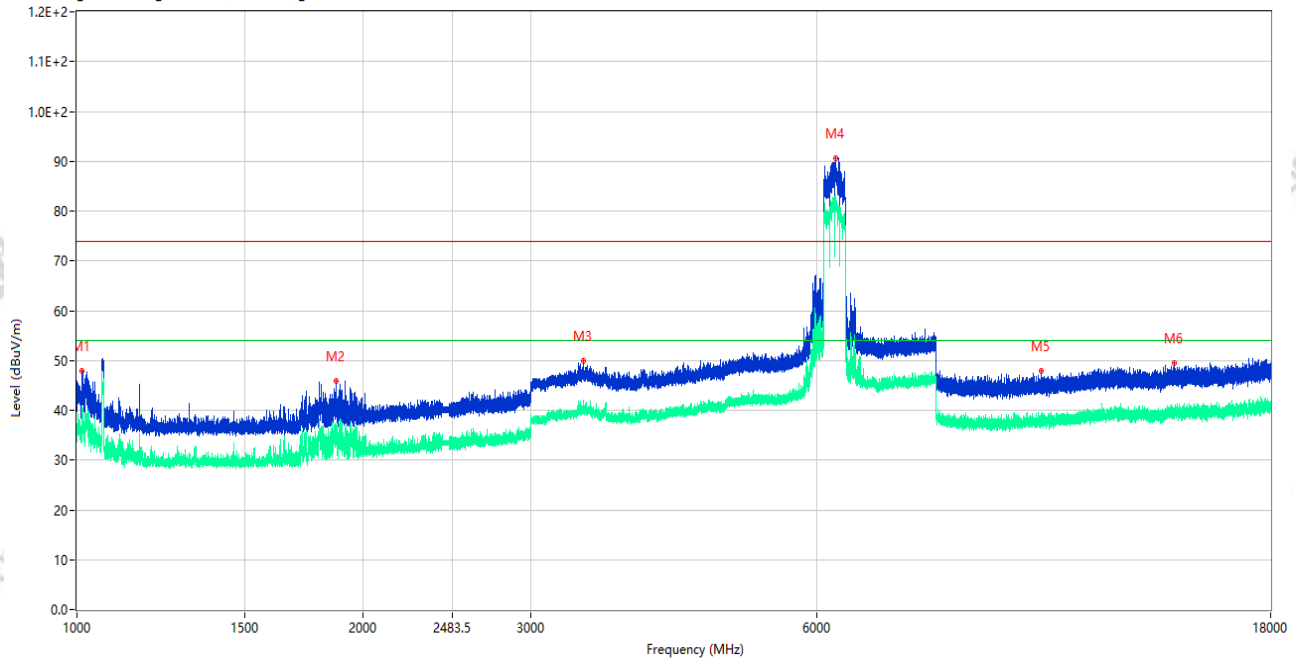

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1012.300	47.82	-14.40	74.0	26.18	Peak	75.00	150	Vertical	Pass
1**	1012.300	37.24	-14.40	54.0	16.76	AV	75.00	150	Vertical	Pass
2	1875.200	45.84	-15.50	74.0	28.16	Peak	181.00	150	Vertical	Pass
2**	1875.200	33.00	-15.50	54.0	21.00	AV	181.00	150	Vertical	Pass
3	3407.750	49.84	-5.34	74.0	24.16	Peak	1.00	150	Vertical	Pass
3**	3407.750	41.13	-5.34	54.0	12.87	AV	1.00	150	Vertical	Pass
4	6273.000	90.59	-0.56	74.0	-16.59	Peak	312.00	150	Vertical	N/A
4**	6273.000	81.22	-0.56	54.0	-27.22	AV	312.00	150	Vertical	N/A
5	10333.200	47.93	-3.23	74.0	26.07	Peak	264.00	150	Vertical	Pass
5**	10333.200	37.72	-3.23	54.0	16.28	AV	264.00	150	Vertical	Pass
6	14244.150	49.49	-2.38	74.0	24.51	Peak	345.00	150	Vertical	Pass
6**	14244.150	39.16	-2.38	54.0	14.84	AV	345.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_18.16.26

EUT Name: Tablet

Temp.(°C): 23.1

Model Number: Inventus SD1

Humidity (%RH): 54

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 be320 CH63 P=16

Test Site: 966#2


Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08

ANT7

RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

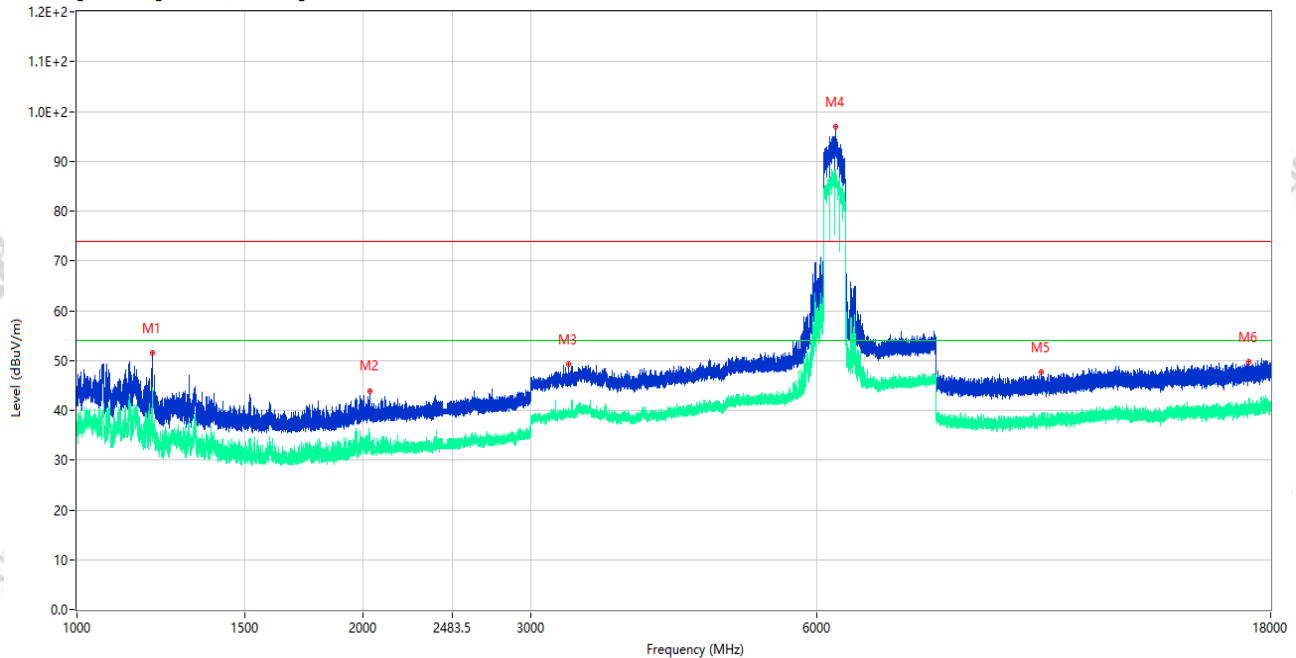

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1199.100	51.42	-15.75	74.0	22.58	Peak	268.00	150	Horizontal	Pass
1**	1199.100	39.08	-15.75	54.0	14.92	AV	268.00	150	Horizontal	Pass
2	2033.300	43.93	-13.44	74.0	30.07	Peak	310.00	150	Horizontal	Pass
2**	2033.300	35.34	-13.44	54.0	18.66	AV	310.00	150	Horizontal	Pass
3	3287.000	49.28	-6.80	74.0	24.72	Peak	296.00	150	Horizontal	Pass
3**	3287.000	39.51	-6.80	54.0	14.49	AV	296.00	150	Horizontal	Pass
4	6273.750	96.90	-0.54	74.0	-22.90	Peak	196.00	150	Horizontal	N/A
4**	6273.750	87.38	-0.54	54.0	-33.38	AV	196.00	150	Horizontal	N/A
5	10324.412	47.76	-3.27	74.0	26.24	Peak	0.00	150	Horizontal	Pass
5**	10324.412	38.25	-3.27	54.0	15.75	AV	0.00	150	Horizontal	Pass
6	17091.750	49.64	-0.67	74.0	24.36	Peak	277.00	150	Horizontal	Pass
6**	17091.750	40.45	-0.67	54.0	13.55	AV	277.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-23_09.43.11

EUT Name: Tablet

Temp.(°C): 23.5

Model Number: Inventus SD1

Humidity (%RH): 46

Sample Number: CC26060330-001-S07

Pressure(kPa): 101


Test Standard: 47 CFR Part 15E

Work Mode: Normal working Link(6G)

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

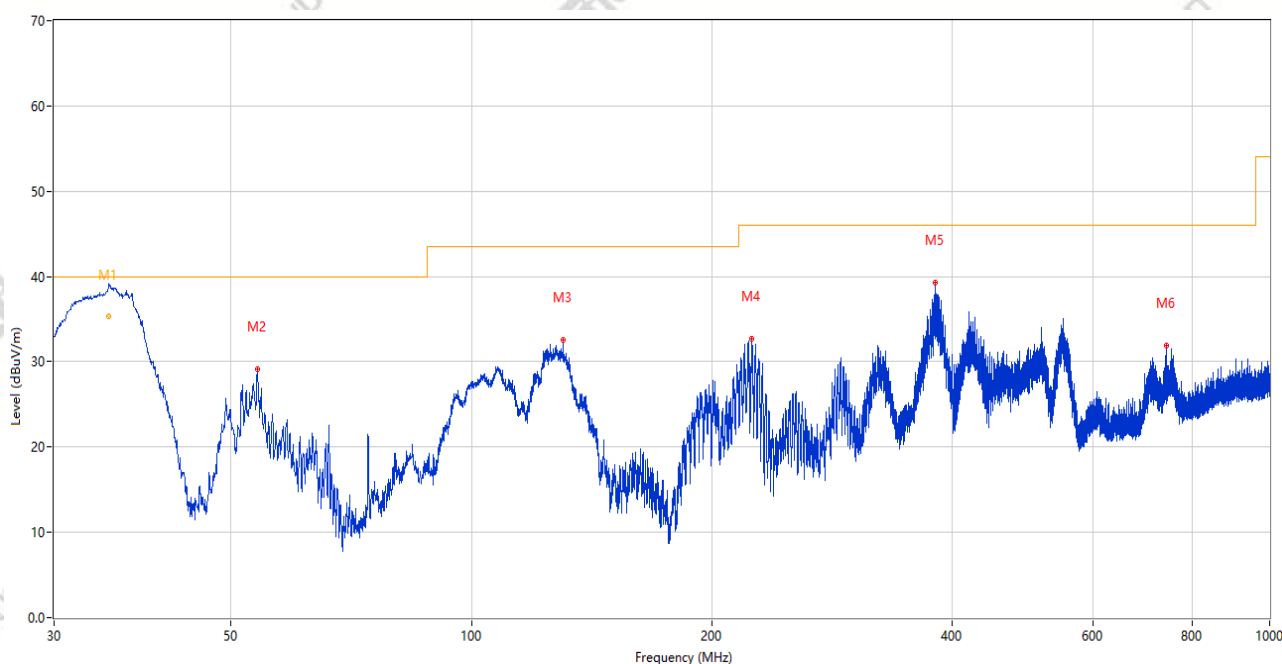Remark: 适配器: A01+数据线: A08
ANT7

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	35.162	37.73	-27.77	40.0	2.27	Peak	125.00	100	Vertical	Pass
1*	35.162	35.39	-27.77	40.0	4.61	QP	125.00	100	Vertical	Pass
2	53.959	29.09	-25.08	40.0	10.91	Peak	200.00	200	Vertical	Pass
3	130.249	32.60	-29.29	43.5	10.90	Peak	316.00	100	Vertical	Pass
4	224.388	32.66	-25.66	46.0	13.34	Peak	25.00	200	Vertical	Pass
5	381.140	39.30	-21.33	46.0	6.70	Peak	243.00	100	Vertical	Pass
6	743.386	31.86	-12.61	46.0	14.14	Peak	94.00	100	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-23_09.45.12

EUT Name: Tablet

Temp.(°C): 23.5

Model Number: Inventus SD1

Humidity (%RH): 46

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: Normal working Link(6G)


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 适配器: A01+数据线: A08

ANT7

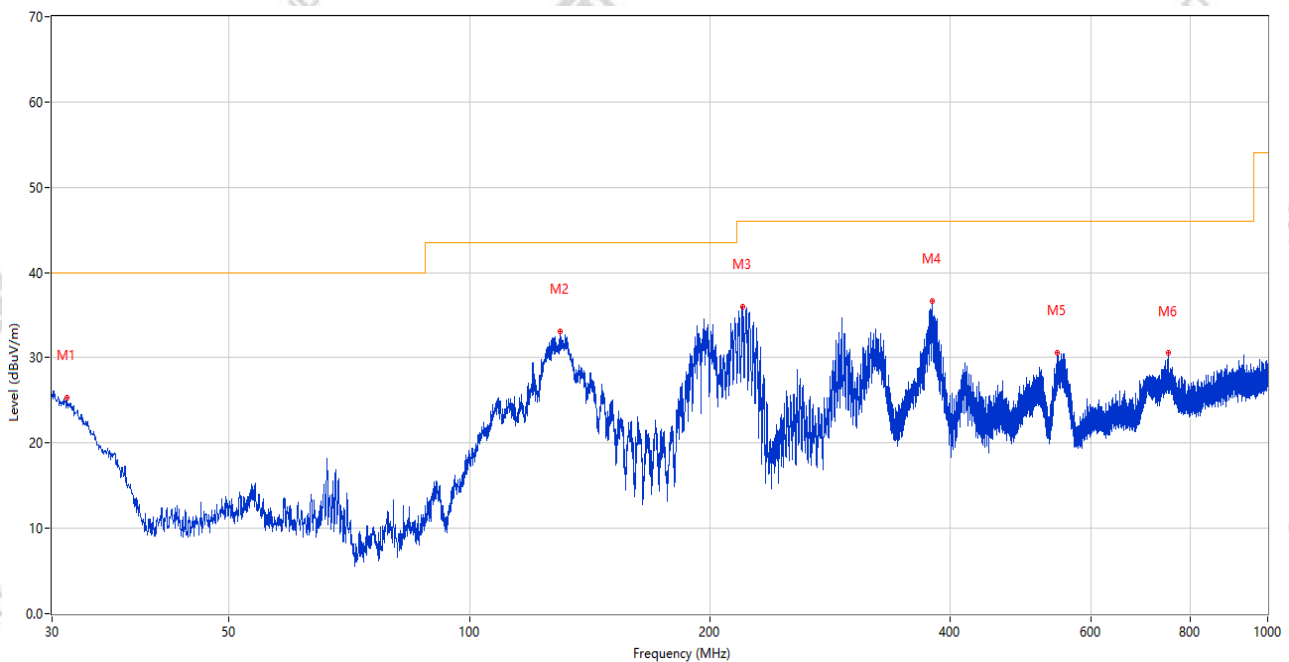

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	31.358	25.31	-29.08	40.0	14.69	Peak	3.00	100	Horizontal	Pass
2	130.055	33.13	-29.29	43.5	10.37	Peak	231.00	200	Horizontal	Pass
3	219.780	35.95	-26.01	46.0	10.05	Peak	238.00	200	Horizontal	Pass
4	379.976	36.63	-21.38	46.0	9.37	Peak	87.00	100	Horizontal	Pass
5	545.264	30.59	-17.45	46.0	15.41	Peak	106.00	100	Horizontal	Pass
6	751.777	30.64	-12.66	46.0	15.36	Peak	0.00	100	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_18.41.01

EUT Name: Tablet

Temp.(°C): 23.4

Model Number: Inventus SD1

Humidity (%RH): 49

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 ax20 CH213 P=7


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT7

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

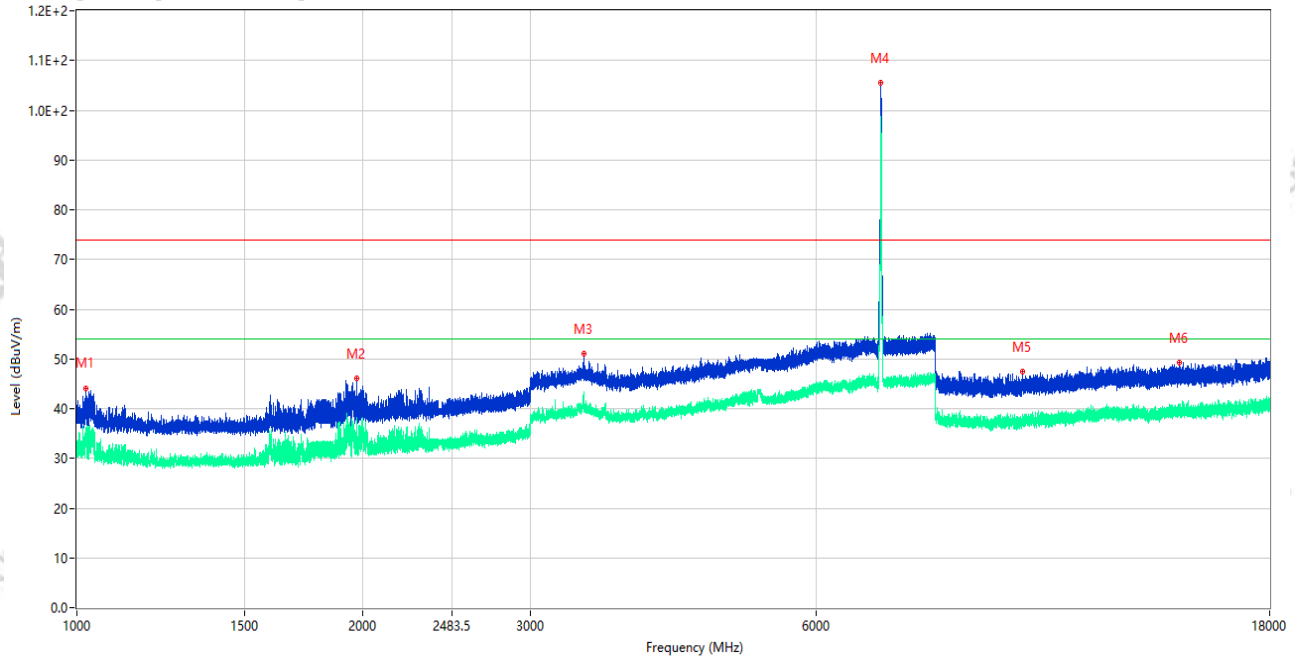

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1021.400	44.16	-15.24	74.0	29.84	Peak	208.00	150	Vertical	Pass
1**	1021.400	35.46	-15.24	54.0	18.54	AV	208.00	150	Vertical	Pass
2	1969.000	46.02	-14.83	74.0	27.98	Peak	103.00	150	Vertical	Pass
2**	1969.000	32.29	-14.83	54.0	21.71	AV	103.00	150	Vertical	Pass
3	3420.250	51.01	-5.00	74.0	22.99	Peak	149.00	150	Vertical	Pass
3**	3420.250	40.46	-5.00	54.0	13.54	AV	149.00	150	Vertical	Pass
4	7016.250	105.47	0.59	74.0	-31.47	Peak	301.00	150	Vertical	N/A
4**	7016.250	97.93	0.59	54.0	-43.93	AV	301.00	150	Vertical	N/A
5	9894.062	47.35	-4.29	74.0	26.65	Peak	2.00	150	Vertical	Pass
5**	9894.062	38.97	-4.29	54.0	15.03	AV	2.00	150	Vertical	Pass
6	14459.924	49.27	-2.61	74.0	24.73	Peak	319.00	150	Vertical	Pass
6**	14459.924	40.32	-2.61	54.0	13.68	AV	319.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_18.46.27

EUT Name: Tablet

Temp.(°C): 23.4

Model Number: Inventus SD1

Humidity (%RH): 49

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 ax20 CH213 P=7


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT7

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

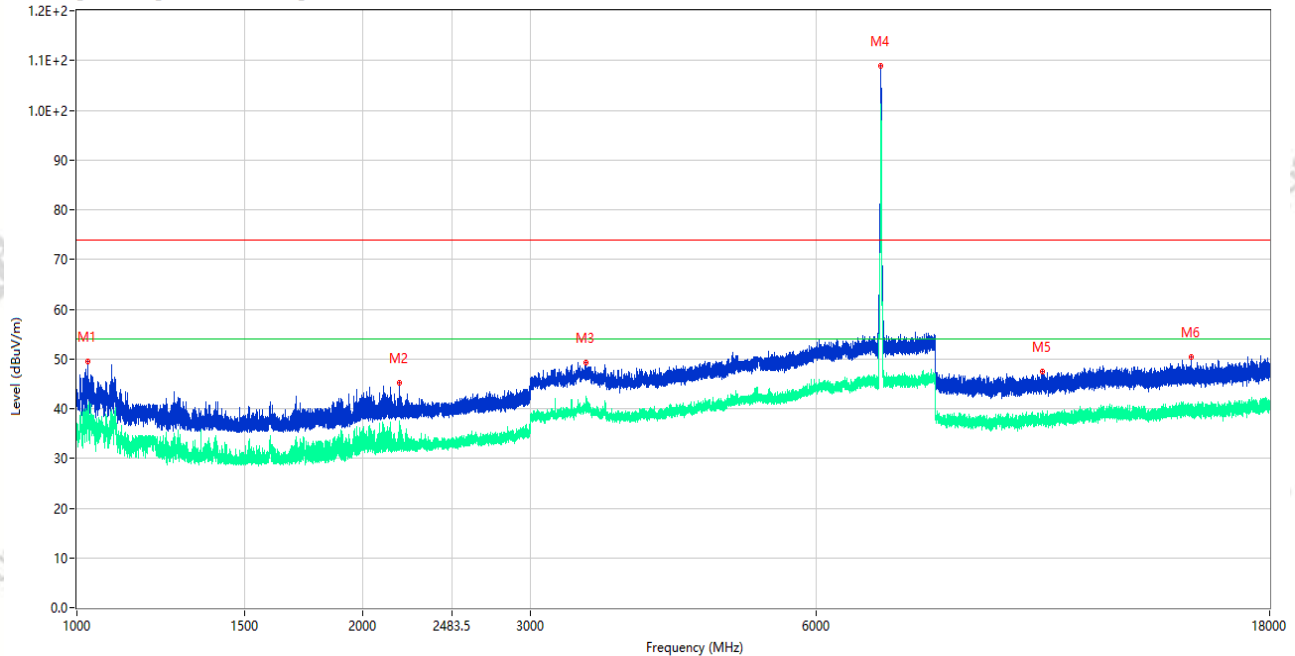

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1027.000	49.53	-15.39	74.0	24.47	Peak	207.00	150	Horizontal	Pass
1**	1027.000	38.91	-15.39	54.0	15.09	AV	207.00	150	Horizontal	Pass
2	2184.100	45.25	-13.08	74.0	28.75	Peak	146.00	150	Horizontal	Pass
2**	2184.100	34.91	-13.08	54.0	19.09	AV	146.00	150	Horizontal	Pass
3	3434.750	49.26	-5.19	74.0	24.74	Peak	167.00	150	Horizontal	Pass
3**	3434.750	39.60	-5.19	54.0	14.40	AV	167.00	150	Horizontal	Pass
4	7014.000	108.85	0.56	74.0	-34.85	Peak	184.00	150	Horizontal	N/A
4**	7014.000	100.81	0.56	54.0	-46.81	AV	184.00	150	Horizontal	N/A
5	10366.687	47.35	-3.23	74.0	26.65	Peak	119.00	150	Horizontal	Pass
5**	10366.687	37.43	-3.23	54.0	16.57	AV	119.00	150	Horizontal	Pass
6	14898.825	50.37	-1.90	74.0	23.63	Peak	359.00	150	Horizontal	Pass
6**	14898.825	39.16	-1.90	54.0	14.84	AV	359.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_18.35.18

EUT Name: Tablet

Temp.(°C): 23.4

Model Number: Inventus SD1

Humidity (%RH): 49

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 ax40 CH211 P=8.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT7

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

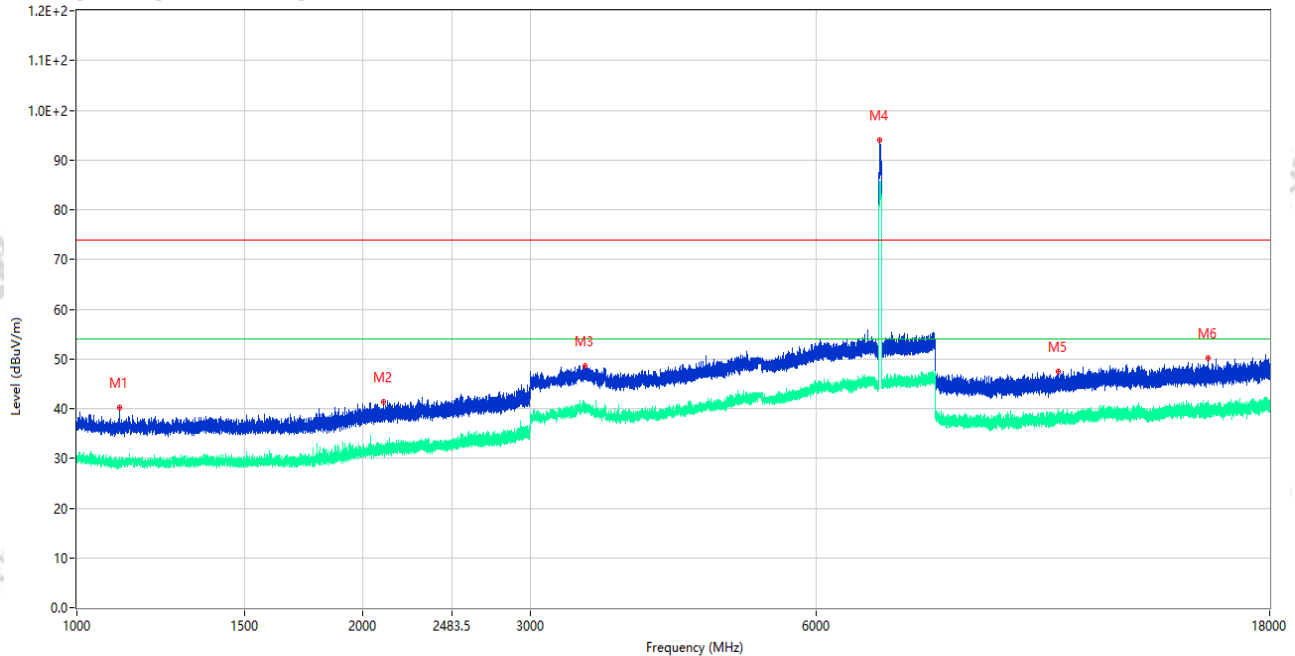

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1109.500	40.22	-15.77	74.0	33.78	Peak	302.00	150	Vertical	Pass
1**	1109.500	28.93	-15.77	54.0	25.07	AV	302.00	150	Vertical	Pass
2	2102.100	41.36	-13.54	74.0	32.64	Peak	13.00	150	Vertical	Pass
2**	2102.100	32.14	-13.54	54.0	21.86	AV	13.00	150	Vertical	Pass
3	3423.250	48.68	-4.92	74.0	25.32	Peak	360.00	150	Vertical	Pass
3**	3423.250	39.60	-4.92	54.0	14.40	AV	360.00	150	Vertical	Pass
4	7003.000	94.04	0.21	74.0	-20.04	Peak	286.00	150	Vertical	N/A
4**	7003.000	84.30	0.21	54.0	-30.30	AV	286.00	150	Vertical	N/A
5	10772.813	47.43	-3.11	74.0	26.57	Peak	8.00	150	Vertical	Pass
5**	10772.813	38.11	-3.11	54.0	15.89	AV	8.00	150	Vertical	Pass
6	15501.000	50.07	-2.16	74.0	23.93	Peak	83.00	150	Vertical	Pass
6**	15501.000	40.13	-2.16	54.0	13.87	AV	83.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_18.24.16

EUT Name: Tablet

Temp.(°C): 23.4

Model Number: Inventus SD1

Humidity (%RH): 49

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 ax40 CH211 P=8.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT7

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

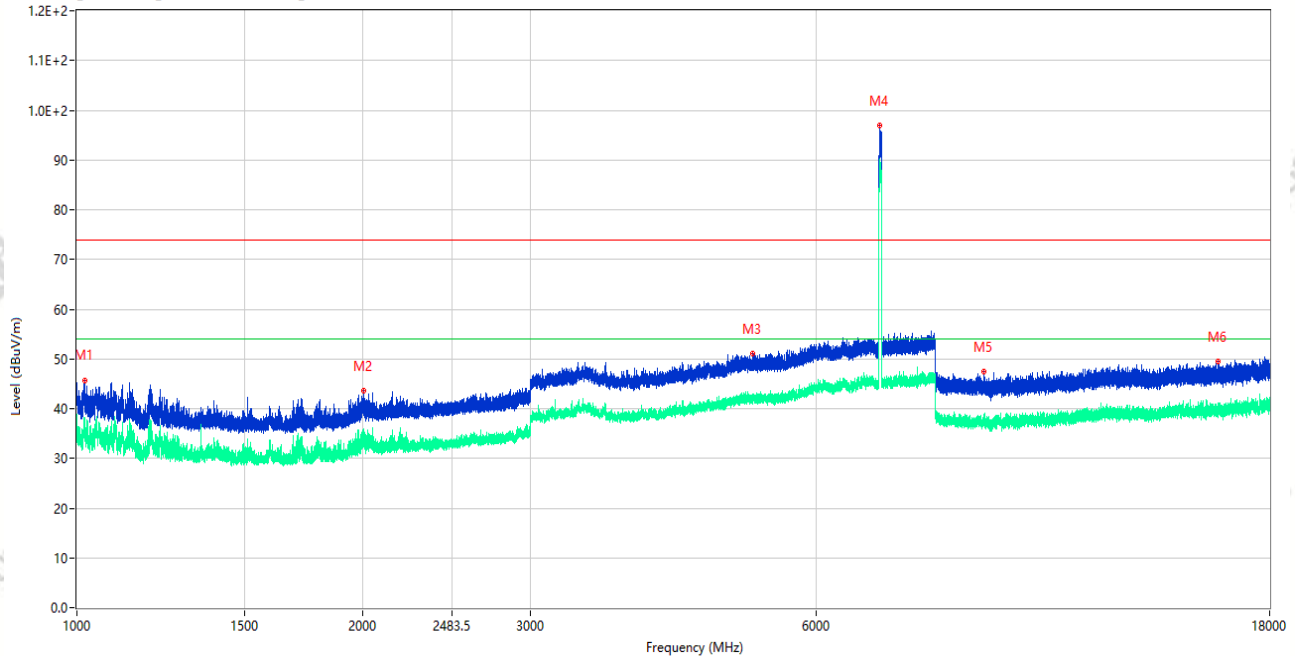

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1019.600	45.75	-15.08	74.0	28.25	Peak	203.00	150	Horizontal	Pass
1**	1019.600	35.15	-15.08	54.0	18.85	AV	203.00	150	Horizontal	Pass
2	2004.800	43.68	-14.21	74.0	30.32	Peak	160.00	150	Horizontal	Pass
2**	2004.800	35.62	-14.21	54.0	18.38	AV	160.00	150	Horizontal	Pass
3	5148.750	50.98	-2.10	74.0	23.02	Peak	360.00	150	Horizontal	Pass
3**	5148.750	42.94	-2.10	54.0	11.06	AV	360.00	150	Horizontal	Pass
4	7002.250	96.97	0.21	74.0	-22.97	Peak	230.00	150	Horizontal	N/A
4**	7002.250	87.58	0.21	54.0	-33.58	AV	230.00	150	Horizontal	N/A
5	8998.925	47.44	-4.51	74.0	26.56	Peak	355.00	150	Horizontal	Pass
5**	8998.925	37.53	-4.51	54.0	16.47	AV	355.00	150	Horizontal	Pass
6	15892.650	49.41	-1.58	74.0	24.59	Peak	284.00	150	Horizontal	Pass
6**	15892.650	40.23	-1.58	54.0	13.77	AV	284.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_18.11.34

EUT Name: Tablet

Temp.(°C): 23.4

Model Number: Inventus SD1

Humidity (%RH): 49

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 ax80 CH199 P=13


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT7

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

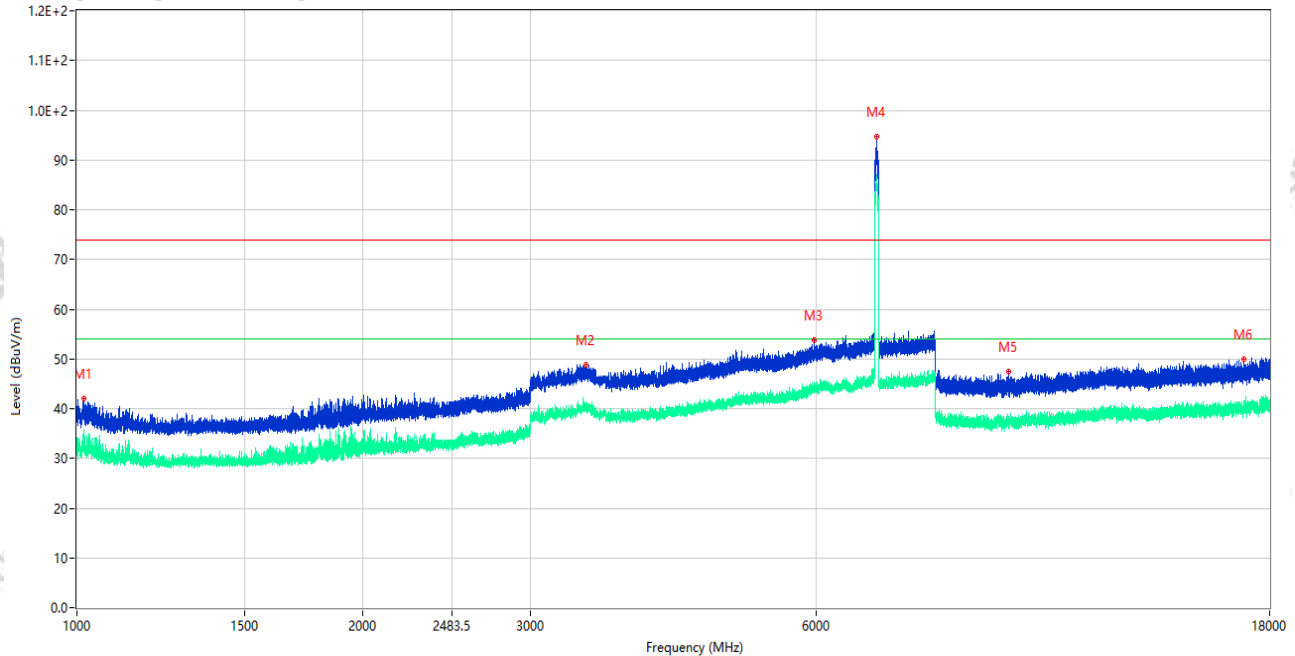

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1016.300	42.11	-14.77	74.0	31.89	Peak	203.00	150	Vertical	Pass
1**	1016.300	32.79	-14.77	54.0	21.21	AV	203.00	150	Vertical	Pass
2	3433.000	48.89	-5.12	74.0	25.11	Peak	360.00	150	Vertical	Pass
2**	3433.000	40.64	-5.12	54.0	13.36	AV	360.00	150	Vertical	Pass
3	5965.750	53.80	-0.27	74.0	20.20	Peak	0.00	150	Vertical	Pass
3**	5965.750	43.87	-0.27	54.0	10.13	AV	0.00	150	Vertical	Pass
4	6943.250	94.66	-0.05	74.0	-20.66	Peak	303.00	150	Vertical	N/A
4**	6943.250	85.28	-0.05	54.0	-31.28	AV	303.00	150	Vertical	N/A
5	9553.487	47.35	-2.58	74.0	26.65	Peak	286.00	150	Vertical	Pass
5**	9553.487	37.68	-2.58	54.0	16.32	AV	286.00	150	Vertical	Pass
6	16893.038	50.03	-0.50	74.0	23.97	Peak	253.00	150	Vertical	Pass
6**	16893.038	40.59	-0.50	54.0	13.41	AV	253.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_18.17.01

EUT Name: Tablet

Temp.(°C): 23.4

Model Number: Inventus SD1

Humidity (%RH): 49

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 ax80 CH199 P=13


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT7

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

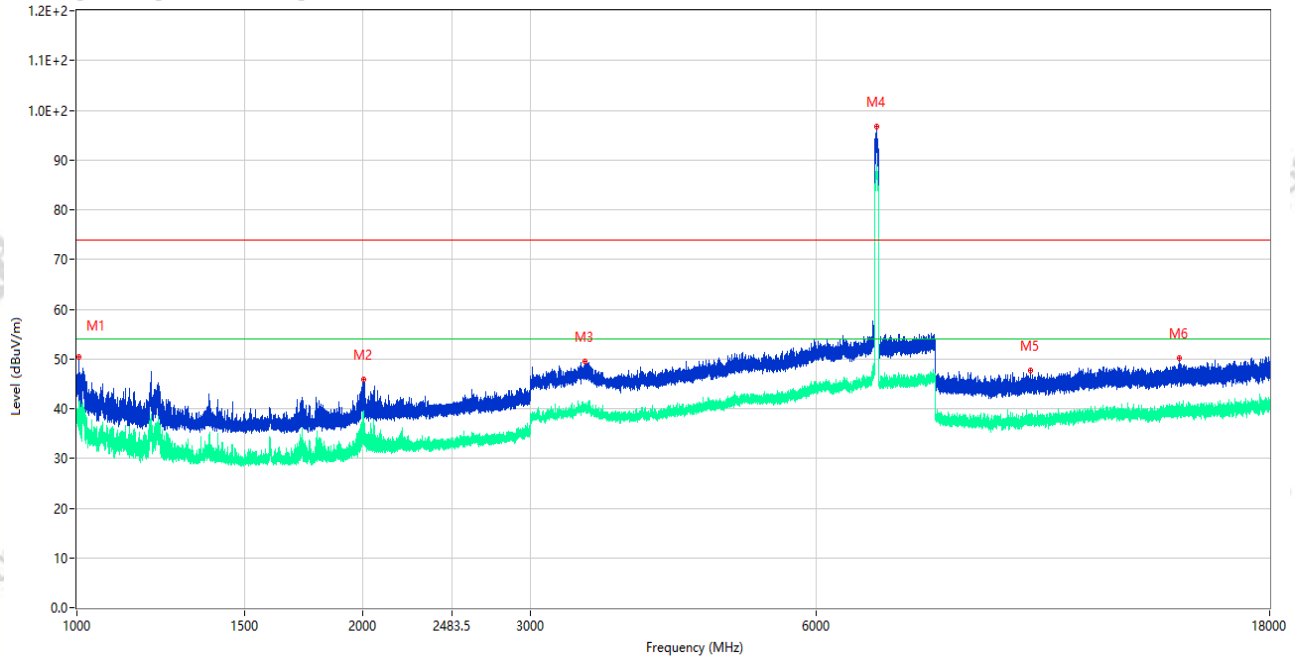

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1003.800	50.39	-14.33	74.0	23.61	Peak	206.00	150	Horizontal	Pass
1**	1003.800	38.03	-14.33	54.0	15.97	AV	206.00	150	Horizontal	Pass
2	2002.100	45.80	-14.25	74.0	28.20	Peak	170.00	150	Horizontal	Pass
2**	2002.100	35.00	-14.25	54.0	19.00	AV	170.00	150	Horizontal	Pass
3	3422.000	49.48	-4.91	74.0	24.52	Peak	99.00	150	Horizontal	Pass
3**	3422.000	39.84	-4.91	54.0	14.16	AV	99.00	150	Horizontal	Pass
4	6952.500	96.74	-0.03	74.0	-22.74	Peak	182.00	150	Horizontal	N/A
4**	6952.500	87.70	-0.03	54.0	-33.70	AV	182.00	150	Horizontal	N/A
5	10072.188	47.76	-3.86	74.0	26.24	Peak	95.00	150	Horizontal	Pass
5**	10072.188	37.70	-3.86	54.0	16.30	AV	95.00	150	Horizontal	Pass
6	14452.838	50.12	-2.63	74.0	23.88	Peak	360.00	150	Horizontal	Pass
6**	14452.838	39.53	-2.63	54.0	14.47	AV	360.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_17.52.48

EUT Name:	Tablet	Temp.(°C):	23.4
Model Number:	Inventus SD1	Humidity (%RH):	49
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII8 ax160 CH207 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT7

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

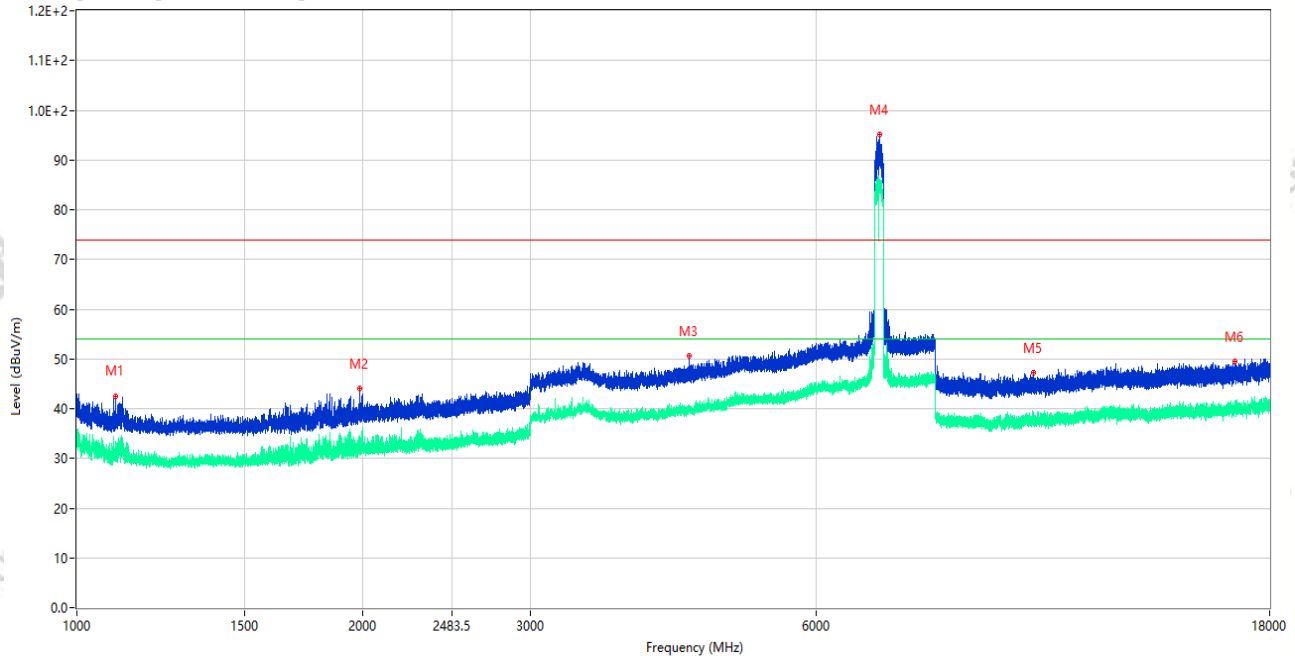

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1097.200	42.38	-15.75	74.0	31.62	Peak	280.00	150	Vertical	Pass
1**	1097.200	30.19	-15.75	54.0	23.81	AV	280.00	150	Vertical	Pass
2	1982.800	44.02	-14.86	74.0	29.98	Peak	83.00	150	Vertical	Pass
2**	1982.800	31.84	-14.86	54.0	22.16	AV	83.00	150	Vertical	Pass
3	4412.000	50.52	-2.88	74.0	23.48	Peak	360.00	150	Vertical	Pass
3**	4412.000	39.86	-2.88	54.0	14.14	AV	360.00	150	Vertical	Pass
4	6987.750	95.03	0.25	74.0	-21.03	Peak	301.00	150	Vertical	N/A
4**	6987.750	85.99	0.25	54.0	-31.99	AV	301.00	150	Vertical	N/A
5	10144.388	47.19	-4.23	74.0	26.81	Peak	284.00	150	Vertical	Pass
5**	10144.388	37.54	-4.23	54.0	16.46	AV	284.00	150	Vertical	Pass
6	16559.137	49.53	-0.95	74.0	24.47	Peak	81.00	150	Vertical	Pass
6**	16559.137	40.16	-0.95	54.0	13.84	AV	81.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_17.58.20

EUT Name: Tablet

Temp.(°C): 23.4

Model Number: Inventus SD1

Humidity (%RH): 49

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 ax160 CH207 P=15

Test Site: 966#2


Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08

ANT7

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

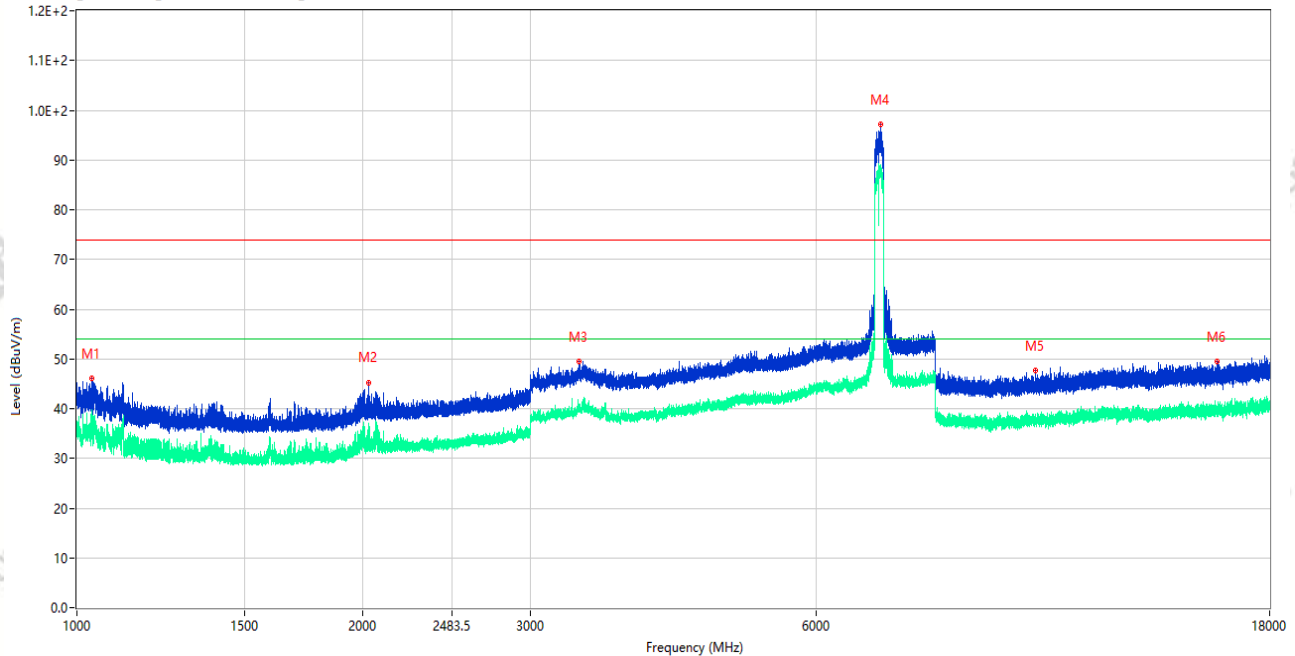


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1037.200	46.01	-15.36	74.0	27.99	Peak	208.00	150	Horizontal	Pass
1**	1037.200	37.28	-15.36	54.0	16.72	AV	208.00	150	Horizontal	Pass
2	2028.800	45.30	-13.74	74.0	28.70	Peak	172.00	150	Horizontal	Pass
2**	2028.800	37.01	-13.74	54.0	16.99	AV	172.00	150	Horizontal	Pass
3	3380.000	49.56	-5.11	74.0	24.44	Peak	47.00	150	Horizontal	Pass
3**	3380.000	40.30	-5.11	54.0	13.70	AV	47.00	150	Horizontal	Pass
4	7005.500	97.26	0.28	74.0	-23.26	Peak	215.00	150	Horizontal	N/A
4**	7005.500	87.37	0.28	54.0	-33.37	AV	215.00	150	Horizontal	N/A
5	10200.438	47.62	-3.45	74.0	26.38	Peak	192.00	150	Horizontal	Pass
5**	10200.438	37.64	-3.45	54.0	16.36	AV	192.00	150	Horizontal	Pass
6	15850.387	49.51	-1.00	74.0	24.49	Peak	286.00	150	Horizontal	Pass
6**	15850.387	39.29	-1.00	54.0	14.71	AV	286.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547
Test Time: 2026-07-21_17.45.18

EUT Name:	Tablet	Temp.(°C):	23.4
Model Number:	Inventus SD1	Humidity (%RH):	49
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII8 be20 CH213 P=7
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT7

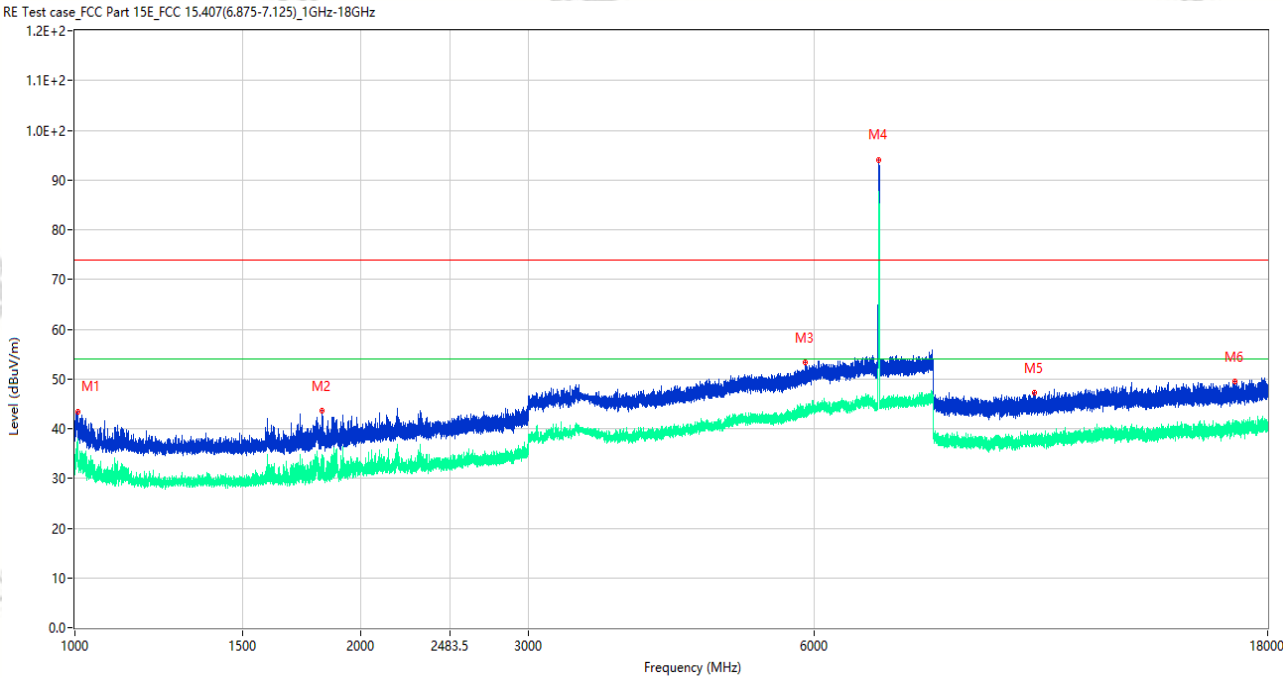

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1006.300	43.44	-14.21	74.0	30.56	Peak	204.00	150	Vertical	Pass
1**	1006.300	38.06	-14.21	54.0	15.94	AV	204.00	150	Vertical	Pass
2	1820.700	43.55	-16.06	74.0	30.45	Peak	136.00	150	Vertical	Pass
2**	1820.700	33.98	-16.06	54.0	20.02	AV	136.00	150	Vertical	Pass
3	5873.750	53.41	-1.07	74.0	20.59	Peak	249.00	150	Vertical	Pass
3**	5873.750	42.83	-1.07	54.0	11.17	AV	249.00	150	Vertical	Pass
4	7014.500	94.11	0.59	74.0	-20.11	Peak	302.00	150	Vertical	N/A
4**	7014.500	87.17	0.59	54.0	-33.17	AV	302.00	150	Vertical	N/A
5	10217.775	47.26	-3.02	74.0	26.74	Peak	239.00	150	Vertical	Pass
5**	10217.775	37.68	-3.02	54.0	16.32	AV	239.00	150	Vertical	Pass
6	16644.187	49.51	-1.12	74.0	24.49	Peak	14.00	150	Vertical	Pass
6**	16644.187	40.32	-1.12	54.0	13.68	AV	14.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_17.39.33

EUT Name: Tablet

Temp.(°C): 23.4

Model Number: Inventus SD1

Humidity (%RH): 49

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 be20 CH213 P=7


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT7

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

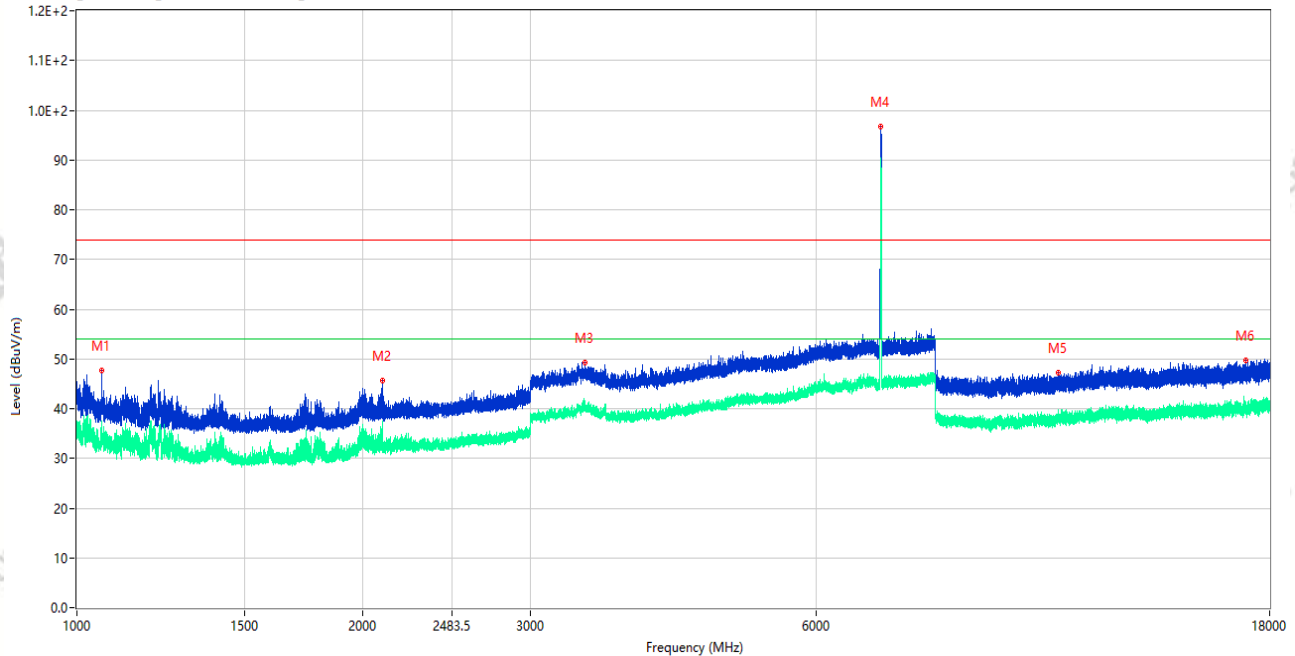

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1061.600	47.61	-15.26	74.0	26.39	Peak	360.00	150	Horizontal	Pass
1**	1061.600	32.57	-15.26	54.0	21.43	AV	360.00	150	Horizontal	Pass
2	2094.800	45.66	-13.62	74.0	28.34	Peak	175.00	150	Horizontal	Pass
2**	2094.800	36.58	-13.62	54.0	17.42	AV	175.00	150	Horizontal	Pass
3	3426.000	49.22	-4.91	74.0	24.78	Peak	47.00	150	Horizontal	Pass
3**	3426.000	39.84	-4.91	54.0	14.16	AV	47.00	150	Horizontal	Pass
4	7010.250	96.78	0.58	74.0	-22.78	Peak	230.00	150	Horizontal	N/A
4**	7010.250	87.46	0.58	54.0	-33.46	AV	230.00	150	Horizontal	N/A
5	10796.325	47.13	-3.28	74.0	26.87	Peak	26.00	150	Horizontal	Pass
5**	10796.325	38.06	-3.28	54.0	15.94	AV	26.00	150	Horizontal	Pass
6	16976.250	49.79	-1.19	74.0	24.21	Peak	15.00	150	Horizontal	Pass
6**	16976.250	39.47	-1.19	54.0	14.53	AV	15.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_17.26.32

EUT Name: Tablet

Temp.(°C): 23.4

Model Number: Inventus SD1

Humidity (%RH): 49

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 be40 CH211 P=8.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT7

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

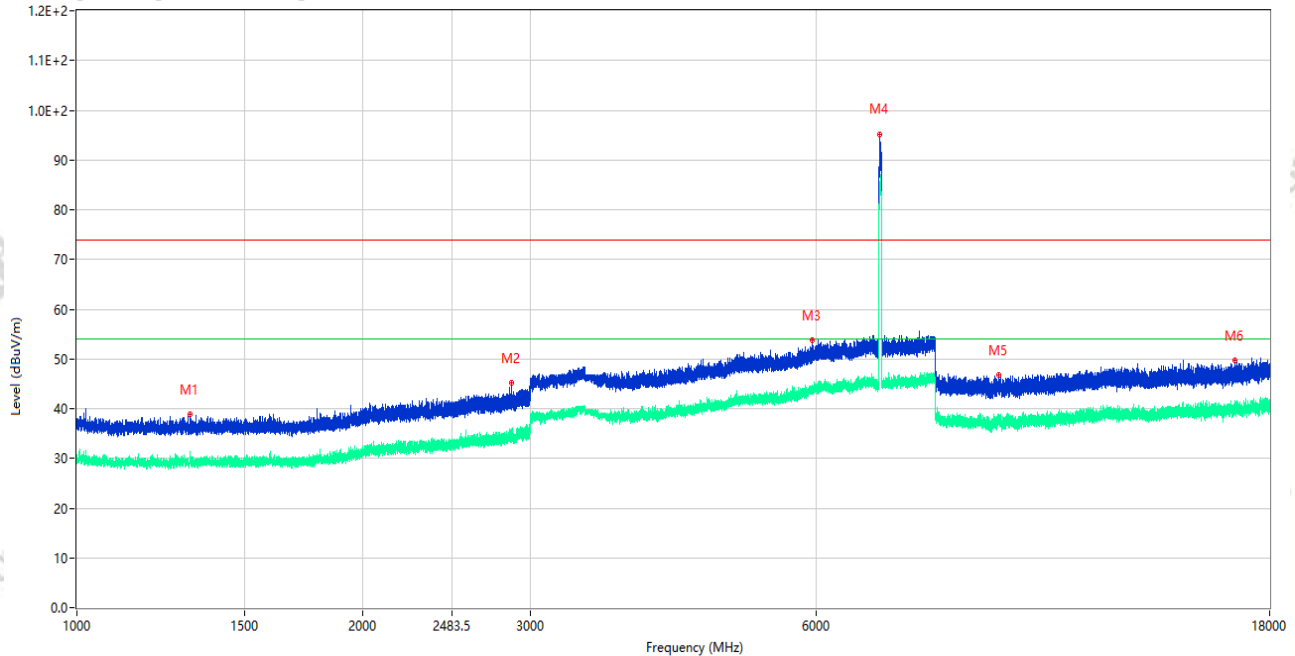

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1316.900	38.93	-15.89	74.0	35.07	Peak	25.00	150	Vertical	Pass
1**	1316.900	29.74	-15.89	54.0	24.26	AV	25.00	150	Vertical	Pass
2	2864.100	45.12	-9.68	74.0	28.88	Peak	323.00	150	Vertical	Pass
2**	2864.100	34.69	-9.68	54.0	19.31	AV	323.00	150	Vertical	Pass
3	5936.250	53.80	-0.07	74.0	20.20	Peak	333.00	150	Vertical	Pass
3**	5936.250	43.09	-0.07	54.0	10.91	AV	333.00	150	Vertical	Pass
4	7003.000	95.24	0.21	74.0	-21.24	Peak	300.00	150	Vertical	N/A
4**	7003.000	85.36	0.21	54.0	-31.36	AV	300.00	150	Vertical	N/A
5	9338.075	46.89	-5.14	74.0	27.11	Peak	168.00	150	Vertical	Pass
5**	9338.075	37.21	-5.14	54.0	16.79	AV	168.00	150	Vertical	Pass
6	16560.187	49.69	-0.99	74.0	24.31	Peak	83.00	150	Vertical	Pass
6**	16560.187	39.92	-0.99	54.0	14.08	AV	83.00	150	Vertical	Pass


Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_17.33.35

EUT Name:	Tablet	Temp.(°C):	23.4
Model Number:	Inventus SD1	Humidity (%RH):	49
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII8 be40 CH211 P=8.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT7

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

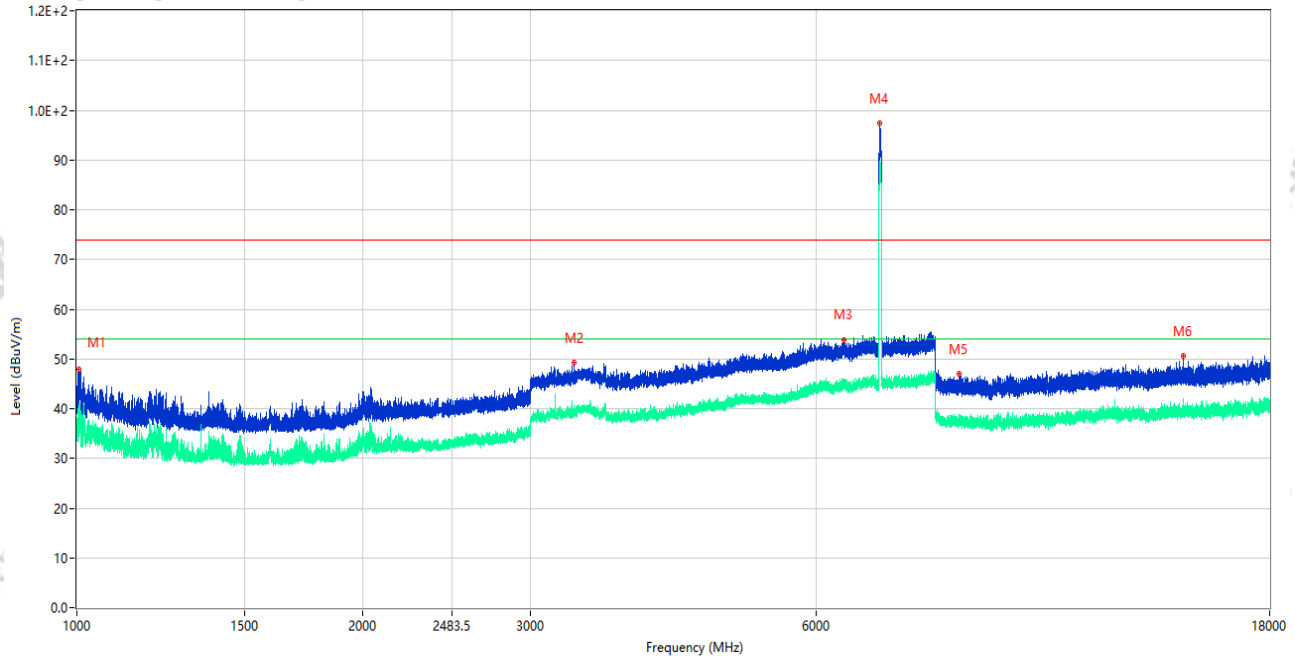

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1005.600	47.81	-14.24	74.0	26.19	Peak	209.00	150	Horizontal	Pass
1**	1005.600	38.20	-14.24	54.0	15.80	AV	209.00	150	Horizontal	Pass
2	3339.000	49.32	-6.01	74.0	24.68	Peak	2.00	150	Horizontal	Pass
2**	3339.000	39.28	-6.01	54.0	14.72	AV	2.00	150	Horizontal	Pass
3	6414.250	53.73	0.25	74.0	20.27	Peak	112.00	150	Horizontal	Pass
3**	6414.250	45.04	0.25	54.0	8.96	AV	112.00	150	Horizontal	Pass
4	6999.750	97.32	0.15	74.0	-23.32	Peak	230.00	150	Horizontal	N/A
4**	6999.750	87.33	0.15	54.0	-33.33	AV	230.00	150	Horizontal	N/A
5	8482.125	47.01	-4.81	74.0	26.99	Peak	143.00	150	Horizontal	Pass
5**	8482.125	37.84	-4.81	54.0	16.16	AV	143.00	150	Horizontal	Pass
6	14594.326	50.60	-2.25	74.0	23.40	Peak	0.00	150	Horizontal	Pass
6**	14594.326	40.41	-2.25	54.0	13.59	AV	0.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_17.18.41

EUT Name:	Tablet	Temp.(°C):	23.4
Model Number:	Inventus SD1	Humidity (%RH):	49
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII8 be80 CH199 P=13
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT7

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

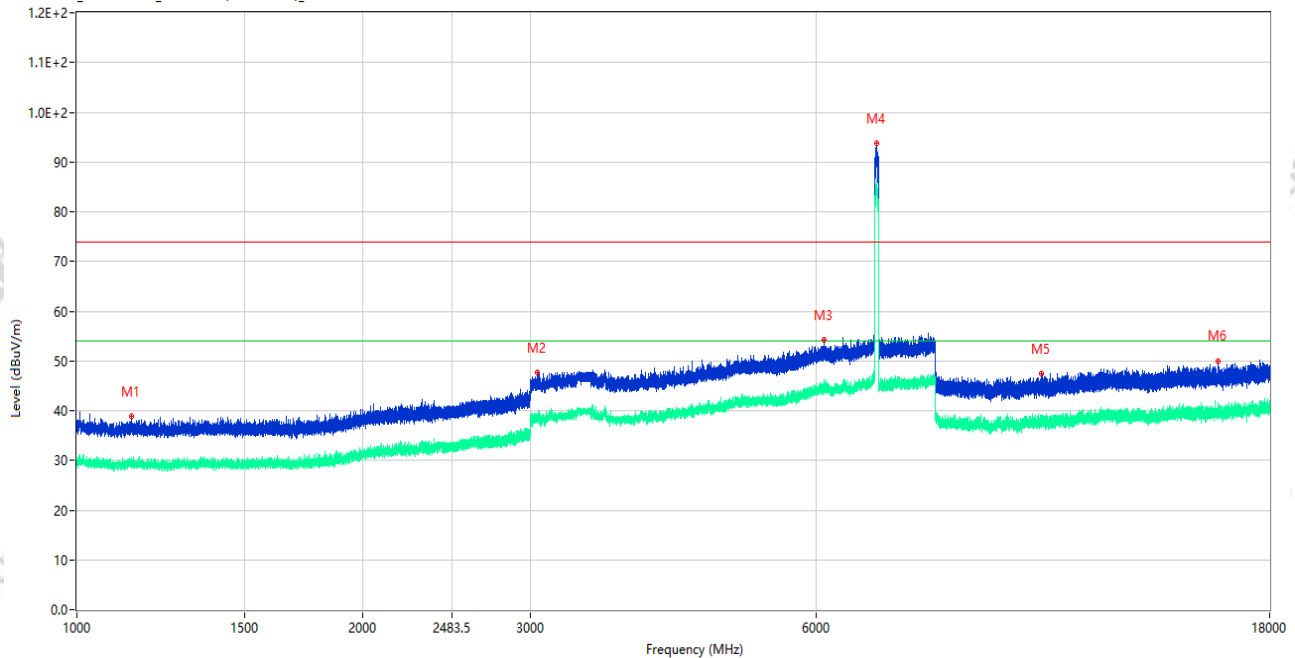

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1142.600	38.93	-15.58	74.0	35.07	Peak	45.00	150	Vertical	Pass
1**	1142.600	28.92	-15.58	54.0	25.08	AV	45.00	150	Vertical	Pass
2	3055.500	47.75	-7.40	74.0	26.25	Peak	320.00	150	Vertical	Pass
2**	3055.500	38.31	-7.40	54.0	15.69	AV	320.00	150	Vertical	Pass
3	6114.250	54.18	-0.11	74.0	19.82	Peak	184.00	150	Vertical	Pass
3**	6114.250	46.22	-0.11	54.0	7.78	AV	184.00	150	Vertical	Pass
4	6948.500	93.82	0.05	74.0	-19.82	Peak	303.00	150	Vertical	N/A
4**	6948.500	84.77	0.05	54.0	-30.77	AV	303.00	150	Vertical	N/A
5	10361.700	47.36	-3.12	74.0	26.64	Peak	360.00	150	Vertical	Pass
5**	10361.700	37.51	-3.12	54.0	16.49	AV	360.00	150	Vertical	Pass
6	15887.400	50.05	-1.49	74.0	23.95	Peak	14.00	150	Vertical	Pass
6**	15887.400	41.66	-1.49	54.0	12.34	AV	14.00	150	Vertical	Pass


Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_17.14.07

EUT Name:	Tablet	Temp.(°C):	23.4
Model Number:	Inventus SD1	Humidity (%RH):	49
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII8 be80 CH199 P=13
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT7

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

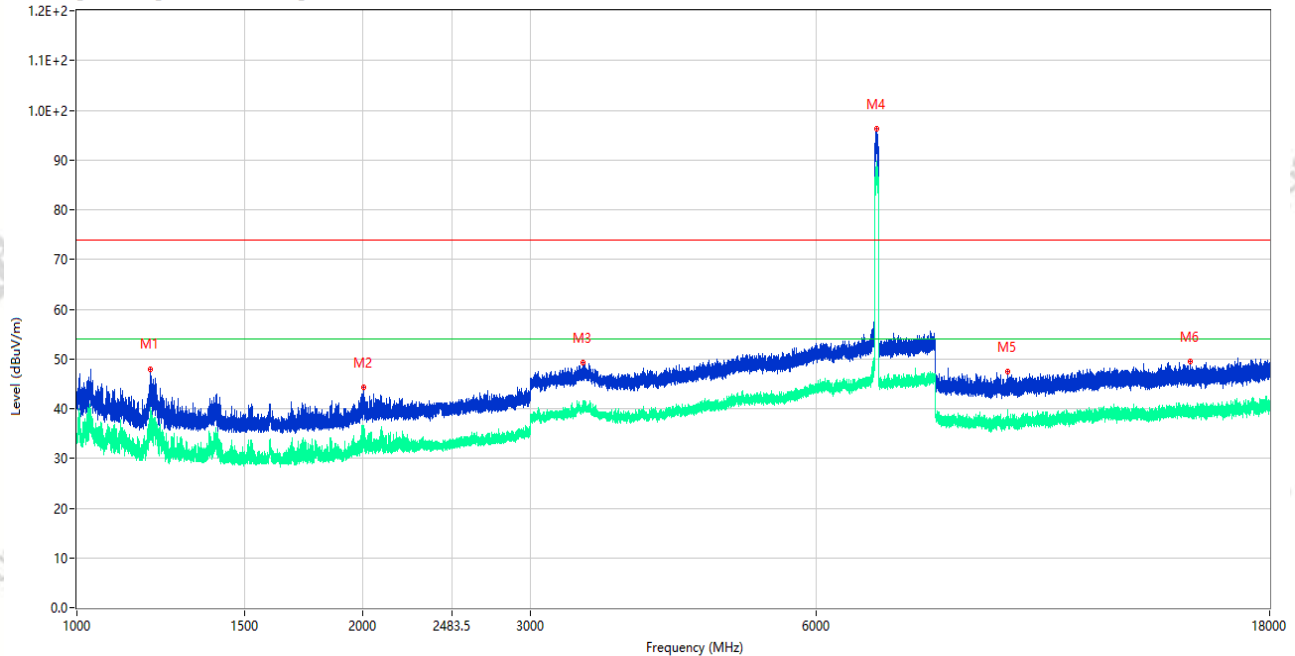

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1195.100	48.00	-15.75	74.0	26.00	Peak	230.00	150	Horizontal	Pass
1**	1195.100	40.27	-15.75	54.0	13.73	AV	230.00	150	Horizontal	Pass
2	2001.300	44.30	-14.27	74.0	29.70	Peak	147.00	150	Horizontal	Pass
2**	2001.300	36.37	-14.27	54.0	17.63	AV	147.00	150	Horizontal	Pass
3	3408.000	49.34	-5.34	74.0	24.66	Peak	0.00	150	Horizontal	Pass
3**	3408.000	41.49	-5.34	54.0	12.51	AV	0.00	150	Horizontal	Pass
4	6948.500	96.30	0.05	74.0	-22.30	Peak	181.00	150	Horizontal	N/A
4**	6948.500	89.52	0.05	54.0	-35.52	AV	181.00	150	Horizontal	N/A
5	9547.076	47.42	-2.53	74.0	26.58	Peak	308.00	150	Horizontal	Pass
5**	9547.076	38.05	-2.53	54.0	15.95	AV	308.00	150	Horizontal	Pass
6	14840.287	49.41	-0.27	74.0	24.59	Peak	360.00	150	Horizontal	Pass
6**	14840.287	39.85	-0.27	54.0	14.15	AV	360.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_17.03.46

EUT Name:	Tablet	Temp.(°C):	23.4
Model Number:	Inventus SD1	Humidity (%RH):	49
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII8 be160 CH207 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT7

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

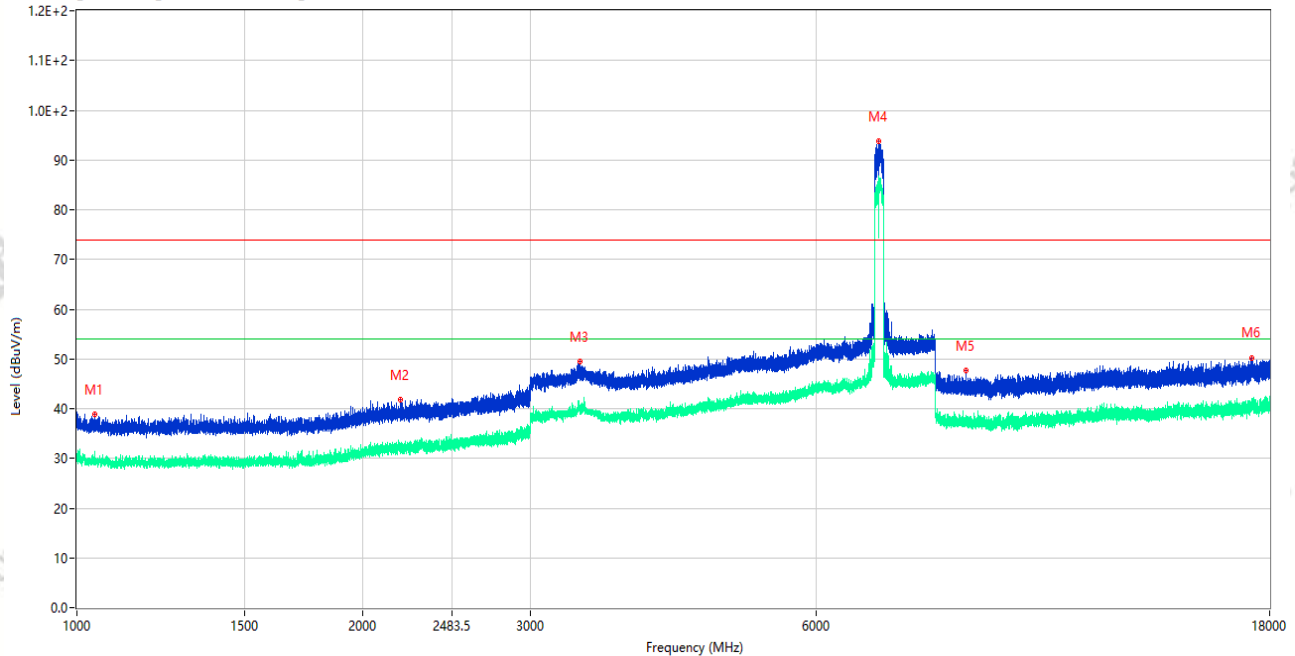

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1045.300	38.91	-15.41	74.0	35.09	Peak	6.00	150	Vertical	Pass
1**	1045.300	29.95	-15.41	54.0	24.05	AV	6.00	150	Vertical	Pass
2	2189.600	41.77	-13.31	74.0	32.23	Peak	111.00	150	Vertical	Pass
2**	2189.600	32.19	-13.31	54.0	21.81	AV	111.00	150	Vertical	Pass
3	3382.500	49.50	-5.25	74.0	24.50	Peak	355.00	150	Vertical	Pass
3**	3382.500	40.36	-5.25	54.0	13.64	AV	355.00	150	Vertical	Pass
4	6987.000	93.76	0.25	74.0	-19.76	Peak	301.00	150	Vertical	N/A
4**	6987.000	86.80	0.25	54.0	-32.80	AV	301.00	150	Vertical	N/A
5	8622.250	47.78	-5.35	74.0	26.22	Peak	142.00	150	Vertical	Pass
5**	8622.250	36.51	-5.35	54.0	17.49	AV	142.00	150	Vertical	Pass
6	17240.850	50.26	-0.98	74.0	23.74	Peak	121.00	150	Vertical	Pass
6**	17240.850	40.80	-0.98	54.0	13.20	AV	121.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_17.08.06

EUT Name: Tablet

Temp.(°C): 23.4

Model Number: Inventus SD1

Humidity (%RH): 49

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 be160 CH207 P=15


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT7

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

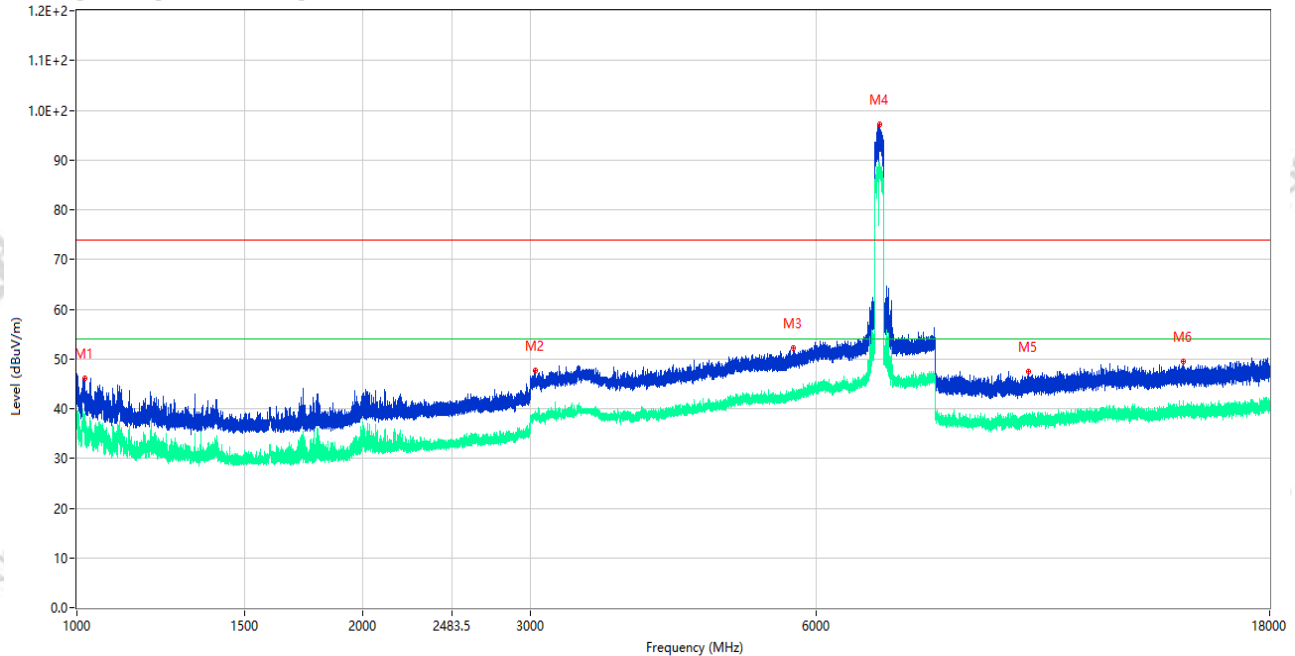

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1018.200	46.09	-14.95	74.0	27.91	Peak	202.00	150	Horizontal	Pass
1**	1018.200	38.27	-14.95	54.0	15.73	AV	202.00	150	Horizontal	Pass
2	3035.000	47.71	-8.03	74.0	26.29	Peak	248.00	150	Horizontal	Pass
2**	3035.000	38.21	-8.03	54.0	15.79	AV	248.00	150	Horizontal	Pass
3	5680.750	52.13	-2.07	74.0	21.87	Peak	265.00	150	Horizontal	Pass
3**	5680.750	42.90	-2.07	54.0	11.10	AV	265.00	150	Horizontal	Pass
4	6997.750	97.17	0.21	74.0	-23.17	Peak	231.00	150	Horizontal	N/A
4**	6997.750	88.23	0.21	54.0	-34.23	AV	231.00	150	Horizontal	N/A
5	10044.637	47.44	-3.91	74.0	26.56	Peak	1.00	150	Horizontal	Pass
5**	10044.637	38.21	-3.91	54.0	15.79	AV	1.00	150	Horizontal	Pass
6	14595.375	49.48	-2.22	74.0	24.52	Peak	286.00	150	Horizontal	Pass
6**	14595.375	40.07	-2.22	54.0	13.93	AV	286.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_16.46.55

EUT Name: Tablet

Temp.(°C): 23.4

Model Number: Inventus SD1

Humidity (%RH): 49

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 be320 CH191 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT7

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

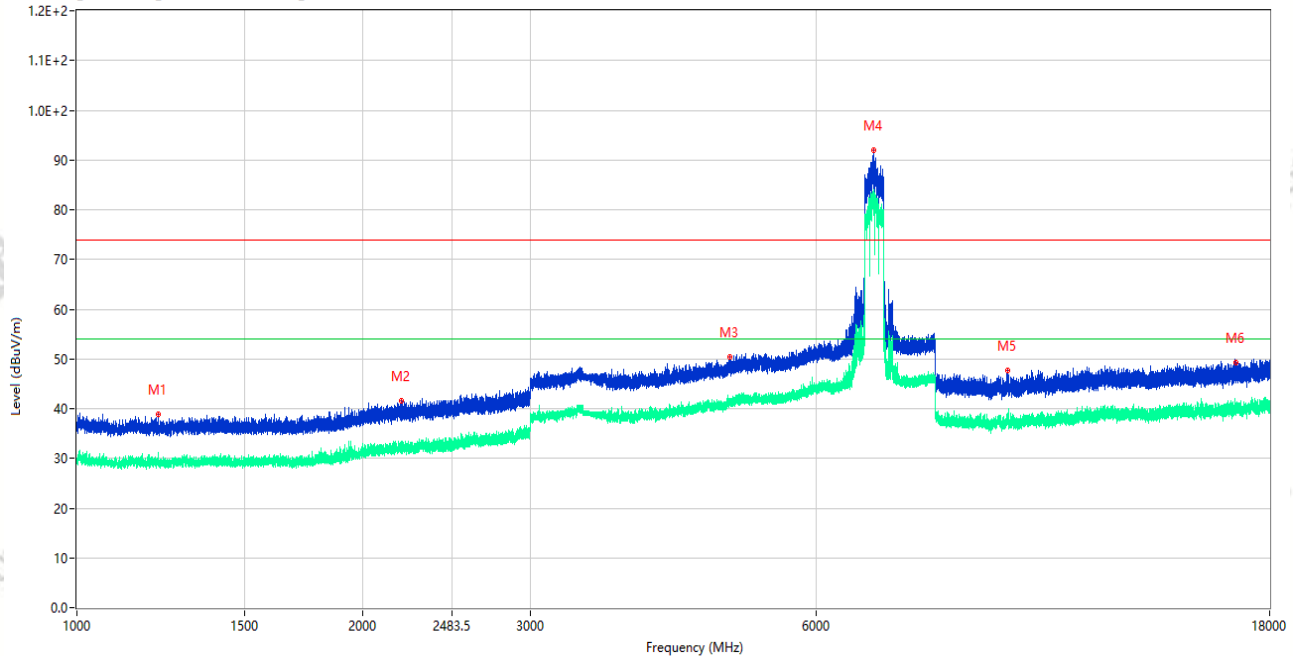

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1217.900	38.76	-15.96	74.0	35.24	Peak	360.00	150	Vertical	Pass
1**	1217.900	28.77	-15.96	54.0	25.23	AV	360.00	150	Vertical	Pass
2	2196.000	41.53	-13.32	74.0	32.47	Peak	294.00	150	Vertical	Pass
2**	2196.000	32.14	-13.32	54.0	21.86	AV	294.00	150	Vertical	Pass
3	4868.750	50.37	-2.15	74.0	23.63	Peak	167.00	150	Vertical	Pass
3**	4868.750	41.30	-2.15	54.0	12.70	AV	167.00	150	Vertical	Pass
4	6897.000	91.87	0.65	74.0	-17.87	Peak	300.00	150	Vertical	N/A
4**	6897.000	82.04	0.65	54.0	-28.04	AV	300.00	150	Vertical	N/A
5	9550.638	47.58	-2.51	74.0	26.42	Peak	360.00	150	Vertical	Pass
5**	9550.638	38.19	-2.51	54.0	15.81	AV	360.00	150	Vertical	Pass
6	16572.261	49.16	-0.74	74.0	24.84	Peak	15.00	150	Vertical	Pass
6**	16572.261	39.80	-0.74	54.0	14.20	AV	15.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_16.42.59

EUT Name: Tablet

Temp.(°C): 23.4

Model Number: Inventus SD1

Humidity (%RH): 49

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 be320 CH191 P=16

Test Site: 966#2


Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08

ANT7

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

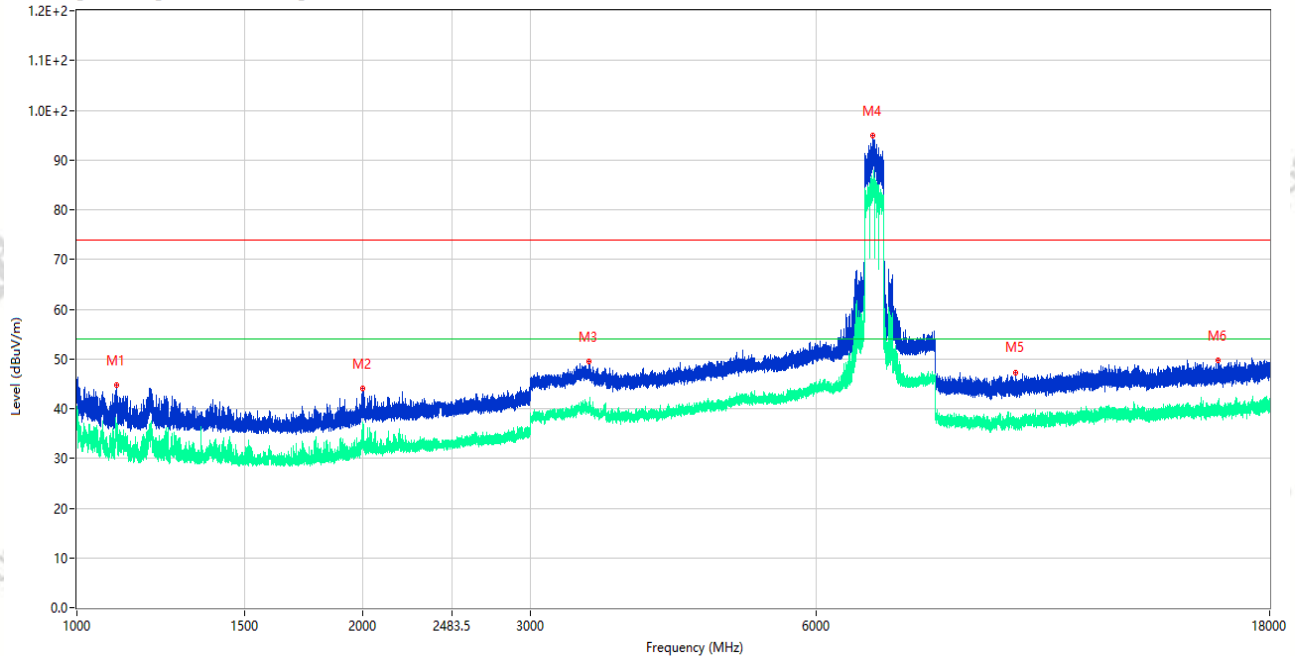

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1101.200	44.74	-15.73	74.0	29.26	Peak	163.00	150	Horizontal	Pass
1**	1101.200	35.61	-15.73	54.0	18.39	AV	163.00	150	Horizontal	Pass
2	1998.200	44.13	-14.38	74.0	29.87	Peak	170.00	150	Horizontal	Pass
2**	1998.200	34.38	-14.38	54.0	19.62	AV	170.00	150	Horizontal	Pass
3	3454.750	49.46	-4.91	74.0	24.54	Peak	354.00	150	Horizontal	Pass
3**	3454.750	39.88	-4.91	54.0	14.12	AV	354.00	150	Horizontal	Pass
4	6877.500	94.85	0.61	74.0	-20.85	Peak	181.00	150	Horizontal	N/A
4**	6877.500	84.37	0.61	54.0	-30.37	AV	181.00	150	Horizontal	N/A
5	9730.900	47.33	-4.21	74.0	26.67	Peak	360.00	150	Horizontal	Pass
5**	9730.900	36.78	-4.21	54.0	17.22	AV	360.00	150	Horizontal	Pass
6	15889.500	49.77	-1.54	74.0	24.23	Peak	151.00	150	Horizontal	Pass
6**	15889.500	40.43	-1.54	54.0	13.57	AV	151.00	150	Horizontal	Pass

Aux. Antenna Test Result

Project Number: P-CC26060547

Test Time: 2026-07-19_22.39.58

EUT Name: Tablet

Temp.(°C): 23.3

Model Number: Inventus SD1

Humidity (%RH): 52

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 ax20 CH45 P=5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo


Remark: 适配器: A01+数据线: A08
ANT8

RE Test case FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

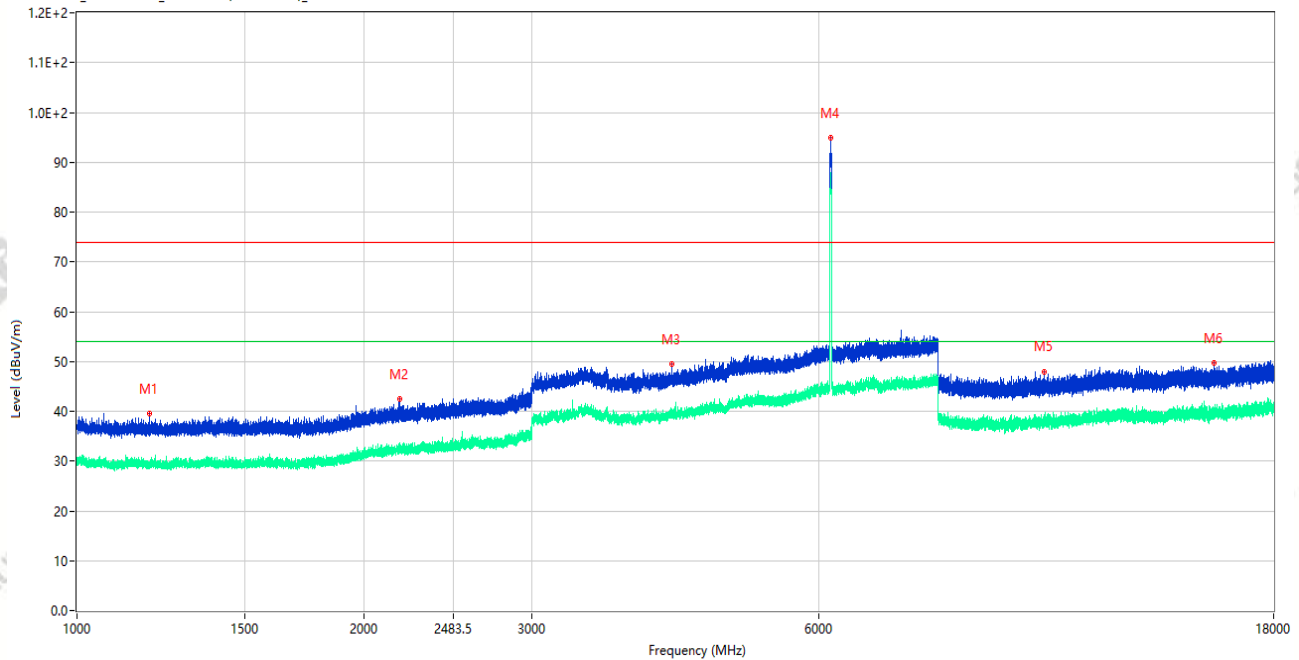

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1192.500	39.59	-15.81	74.0	34.41	Peak	2.00	150	Vertical	Pass
1**	1192.500	28.60	-15.81	54.0	25.40	AV	2.00	150	Vertical	Pass
2	2182.600	42.49	-13.03	74.0	31.51	Peak	214.00	150	Vertical	Pass
2**	2182.600	33.28	-13.03	54.0	20.72	AV	214.00	150	Vertical	Pass
3	4209.000	49.43	-3.23	74.0	24.57	Peak	360.00	150	Vertical	Pass
3**	4209.000	40.10	-3.23	54.0	13.90	AV	360.00	150	Vertical	Pass
4	6174.500	94.81	-0.52	74.0	-20.81	Peak	245.00	150	Vertical	N/A
4**	6174.500	87.11	-0.52	54.0	-33.11	AV	245.00	150	Vertical	N/A
5	10331.775	48.01	-3.20	74.0	25.99	Peak	28.00	150	Vertical	Pass
5**	10331.775	37.83	-3.20	54.0	16.17	AV	28.00	150	Vertical	Pass
6	15592.088	49.64	-2.52	74.0	24.36	Peak	12.00	150	Vertical	Pass
6**	15592.088	39.17	-2.52	54.0	14.83	AV	12.00	150	Vertical	Pass

Remark: 适配器: A01+数据线: A08
ANT8



Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_21.03.25

EUT Name: Tablet

Temp.(°C): 23.1

Model Number: Inventus SD1

Humidity (%RH): 54

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 ax40 CH43 P=6


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

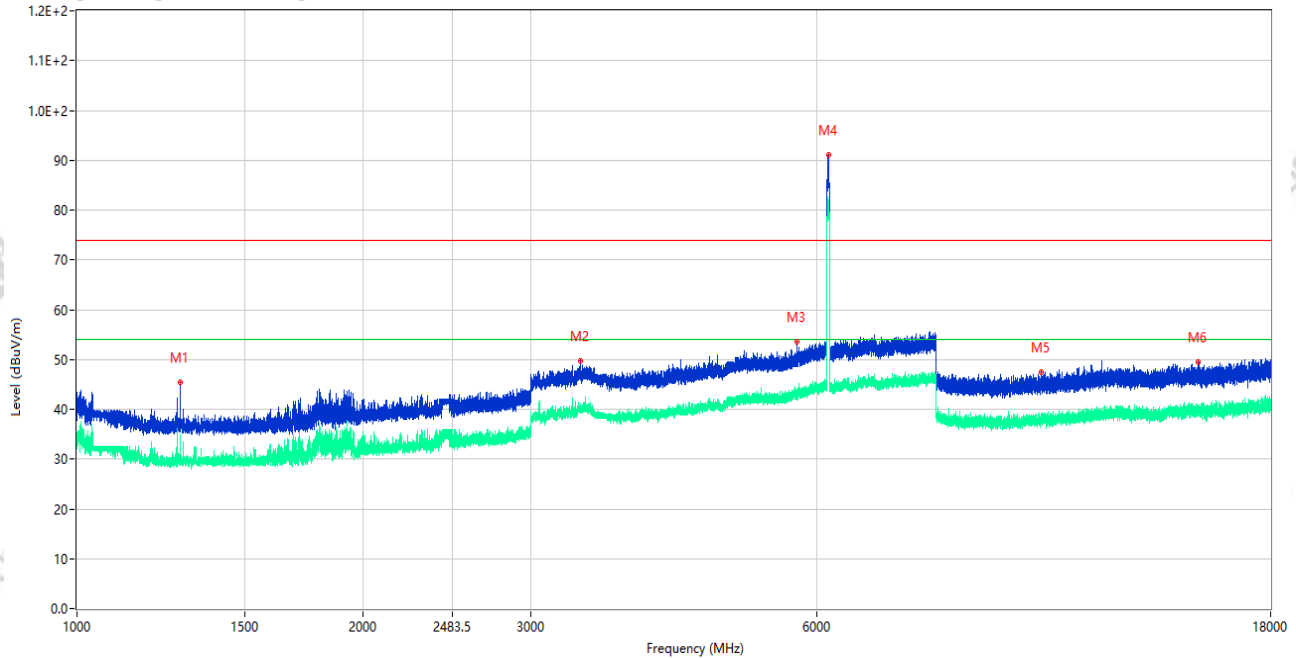

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1284.600	45.39	-15.92	74.0	28.61	Peak	225.00	150	Vertical	Pass
1**	1284.600	32.21	-15.92	54.0	21.79	AV	225.00	150	Vertical	Pass
2	3381.000	49.61	-5.16	74.0	24.39	Peak	215.00	150	Vertical	Pass
2**	3381.000	40.57	-5.16	54.0	13.43	AV	215.00	150	Vertical	Pass
3	5716.500	53.54	-2.31	74.0	20.46	Peak	231.00	150	Vertical	Pass
3**	5716.500	42.65	-2.31	54.0	11.35	AV	231.00	150	Vertical	Pass
4	6168.750	91.04	-0.38	74.0	-17.04	Peak	265.00	150	Vertical	N/A
4**	6168.750	81.72	-0.38	54.0	-27.72	AV	265.00	150	Vertical	N/A
5	10321.087	47.50	-3.31	74.0	26.50	Peak	308.00	150	Vertical	Pass
5**	10321.087	38.20	-3.31	54.0	15.80	AV	308.00	150	Vertical	Pass
6	15093.599	49.49	-2.01	74.0	24.51	Peak	0.00	150	Vertical	Pass
6**	15093.599	39.81	-2.01	54.0	14.19	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_21.07.40

EUT Name: Tablet

Temp.(°C): 23.1

Model Number: Inventus SD1

Humidity (%RH): 54

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 ax40 CH43 P=6


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

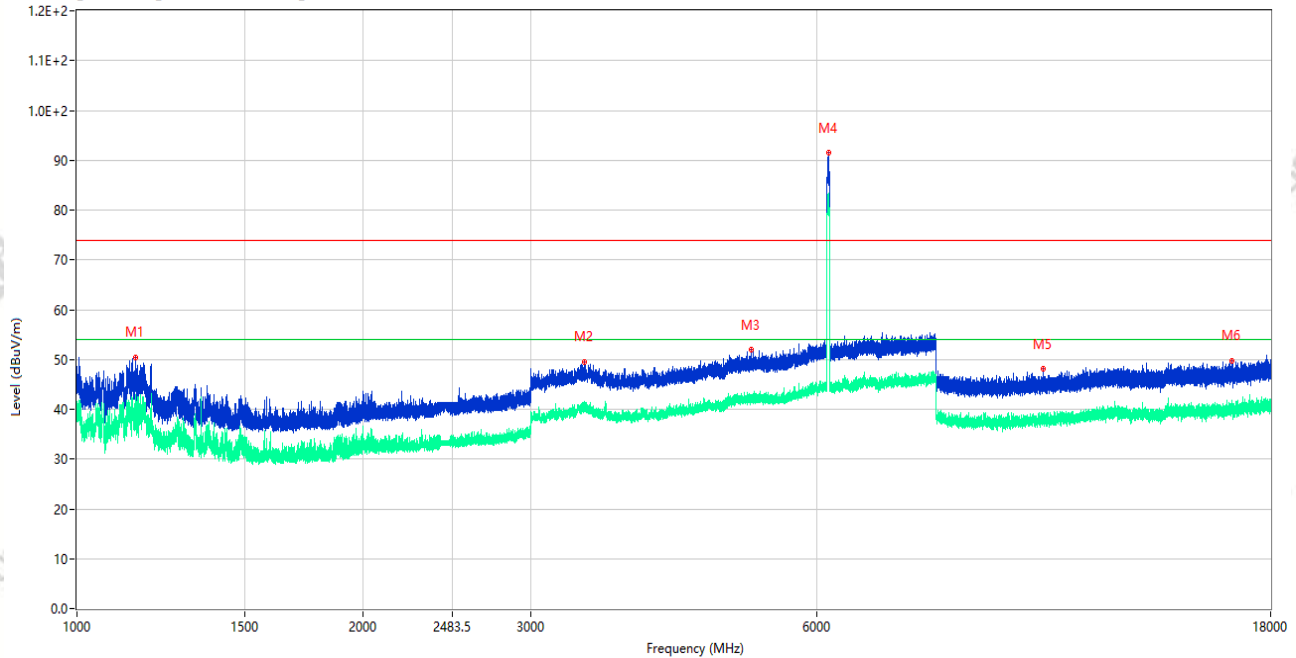

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1151.900	50.32	-15.65	74.0	23.68	Peak	260.00	150	Horizontal	Pass
1**	1151.900	42.67	-15.65	54.0	11.33	AV	260.00	150	Horizontal	Pass
2	3414.000	49.49	-5.27	74.0	24.51	Peak	359.00	150	Horizontal	Pass
2**	3414.000	40.83	-5.27	54.0	13.17	AV	359.00	150	Horizontal	Pass
3	5121.000	51.98	-2.24	74.0	22.02	Peak	0.00	150	Horizontal	Pass
3**	5121.000	42.17	-2.24	54.0	11.83	AV	0.00	150	Horizontal	Pass
4	6169.750	91.42	-0.40	74.0	-17.42	Peak	113.00	150	Horizontal	N/A
4**	6169.750	82.91	-0.40	54.0	-28.91	AV	113.00	150	Horizontal	N/A
5	10379.987	48.05	-3.39	74.0	25.95	Peak	169.00	150	Horizontal	Pass
5**	10379.987	37.59	-3.39	54.0	16.41	AV	169.00	150	Horizontal	Pass
6	16393.762	49.82	-1.09	74.0	24.18	Peak	48.00	150	Horizontal	Pass
6**	16393.762	40.79	-1.09	54.0	13.21	AV	48.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_20.42.30

EUT Name:	Tablet	Temp.(°C):	23.1
Model Number:	Inventus SD1	Humidity (%RH):	54
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII5 ax80 CH39 P=9.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT8

RE Test case FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

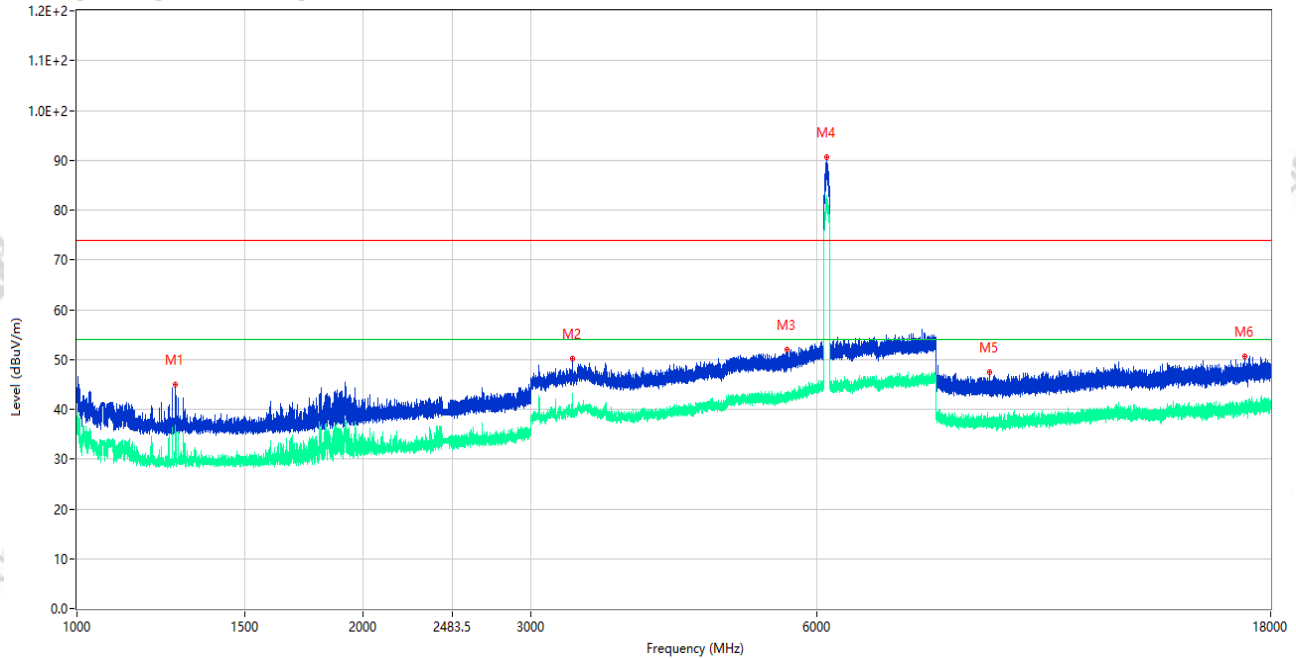

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1268.000	44.98	-15.94	74.0	29.02	Peak	210.00	150	Vertical	Pass
1**	1268.000	35.03	-15.94	54.0	18.97	AV	210.00	150	Vertical	Pass
2	3316.500	50.22	-6.38	74.0	23.78	Peak	0.00	150	Vertical	Pass
2**	3316.500	43.21	-6.38	54.0	10.79	AV	0.00	150	Vertical	Pass
3	5579.500	52.08	-2.86	74.0	21.92	Peak	360.00	150	Vertical	Pass
3**	5579.500	41.79	-2.86	54.0	12.21	AV	360.00	150	Vertical	Pass
4	6143.750	90.60	-0.28	74.0	-16.60	Peak	267.00	150	Vertical	N/A
4**	6143.750	81.80	-0.28	54.0	-27.80	AV	267.00	150	Vertical	N/A
5	9104.850	47.46	-4.95	74.0	26.54	Peak	284.00	150	Vertical	Pass
5**	9104.850	37.78	-4.95	54.0	16.22	AV	284.00	150	Vertical	Pass
6	16915.875	50.65	-0.79	74.0	23.35	Peak	185.00	150	Vertical	Pass
6**	16915.875	40.39	-0.79	54.0	13.61	AV	185.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_20.46.56

EUT Name: Tablet

Temp.(°C): 23.1

Model Number: Inventus SD1

Humidity (%RH): 54

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 ax80 CH39 P=9.5

Test Site: 966#2


Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08

ANT8

RE Test case FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

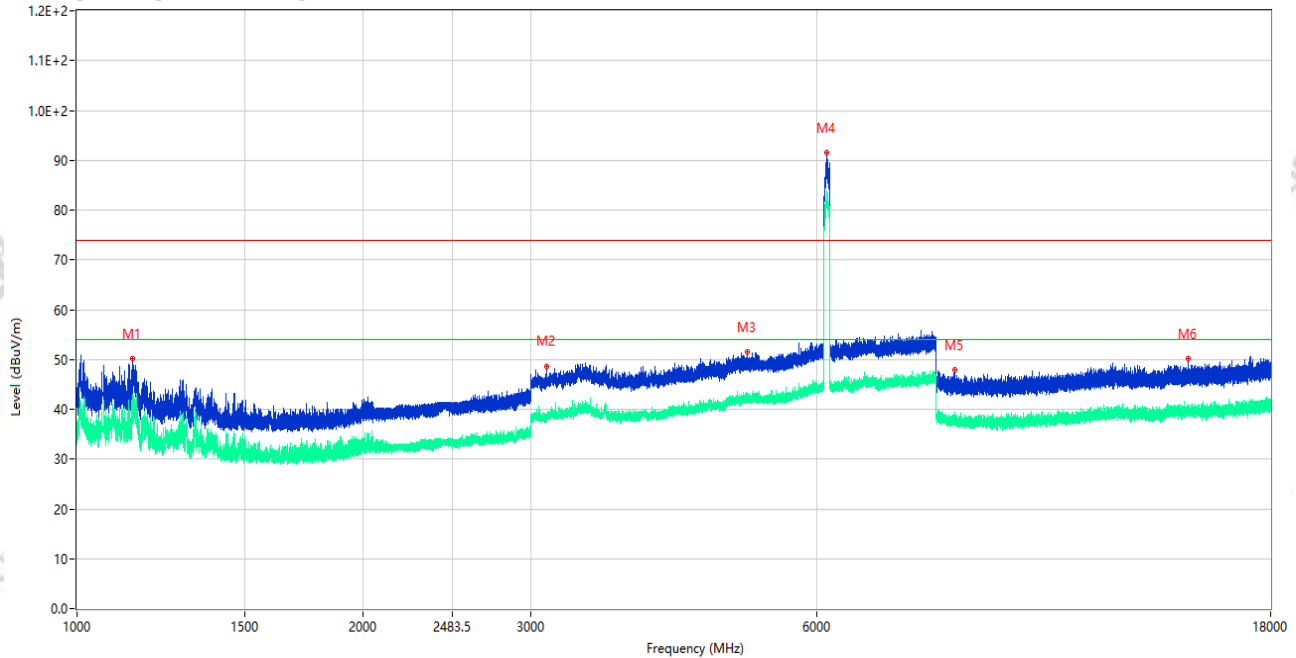

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1143.700	50.08	-15.60	74.0	23.92	Peak	254.00	150	Horizontal	Pass
1**	1143.700	37.10	-15.60	54.0	16.90	AV	254.00	150	Horizontal	Pass
2	3118.750	48.59	-7.73	74.0	25.41	Peak	346.00	150	Horizontal	Pass
2**	3118.750	38.46	-7.73	54.0	15.54	AV	346.00	150	Horizontal	Pass
3	5070.000	51.51	-2.51	74.0	22.49	Peak	82.00	150	Horizontal	Pass
3**	5070.000	42.39	-2.51	54.0	11.61	AV	82.00	150	Horizontal	Pass
4	6148.500	91.42	-0.22	74.0	-17.42	Peak	99.00	150	Horizontal	N/A
4**	6148.500	82.99	-0.22	54.0	-28.99	AV	99.00	150	Horizontal	N/A
5	8377.862	47.81	-4.55	74.0	26.19	Peak	0.00	150	Horizontal	Pass
5**	8377.862	37.52	-4.55	54.0	16.48	AV	0.00	150	Horizontal	Pass
6	14746.050	50.07	-1.69	74.0	23.93	Peak	254.00	150	Horizontal	Pass
6**	14746.050	39.66	-1.69	54.0	14.34	AV	254.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_20.56.53

EUT Name: Tablet

Temp.(°C): 23.1

Model Number: Inventus SD1

Humidity (%RH): 54

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 ax160 CH47 P=13


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

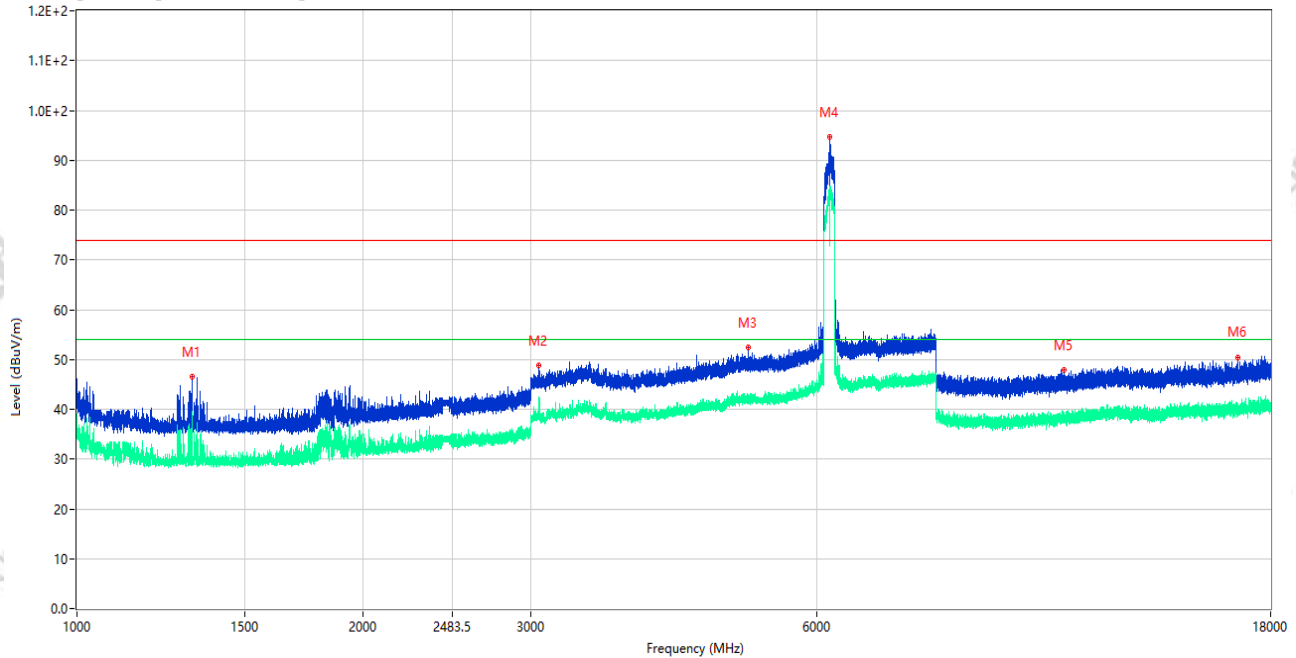

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1321.300	46.61	-15.90	74.0	27.39	Peak	202.00	150	Vertical	Pass
1**	1321.300	35.56	-15.90	54.0	18.44	AV	202.00	150	Vertical	Pass
2	3062.750	48.88	-7.38	74.0	25.12	Peak	0.00	150	Vertical	Pass
2**	3062.750	42.47	-7.38	54.0	11.53	AV	0.00	150	Vertical	Pass
3	5084.500	52.43	-2.49	74.0	21.57	Peak	0.00	150	Vertical	Pass
3**	5084.500	41.76	-2.49	54.0	12.24	AV	0.00	150	Vertical	Pass
4	6194.000	94.75	-0.71	74.0	-20.75	Peak	267.00	150	Vertical	N/A
4**	6194.000	83.73	-0.71	54.0	-29.73	AV	267.00	150	Vertical	N/A
5	10907.475	47.85	-3.19	74.0	26.15	Peak	26.00	150	Vertical	Pass
5**	10907.475	38.29	-3.19	54.0	15.71	AV	26.00	150	Vertical	Pass
6	16613.738	50.48	-1.21	74.0	23.52	Peak	360.00	150	Vertical	Pass
6**	16613.738	39.41	-1.21	54.0	14.59	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_20.52.03

EUT Name: Tablet

Temp.(°C): 23.1

Model Number: Inventus SD1

Humidity (%RH): 54

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 ax160 CH47 P=13


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

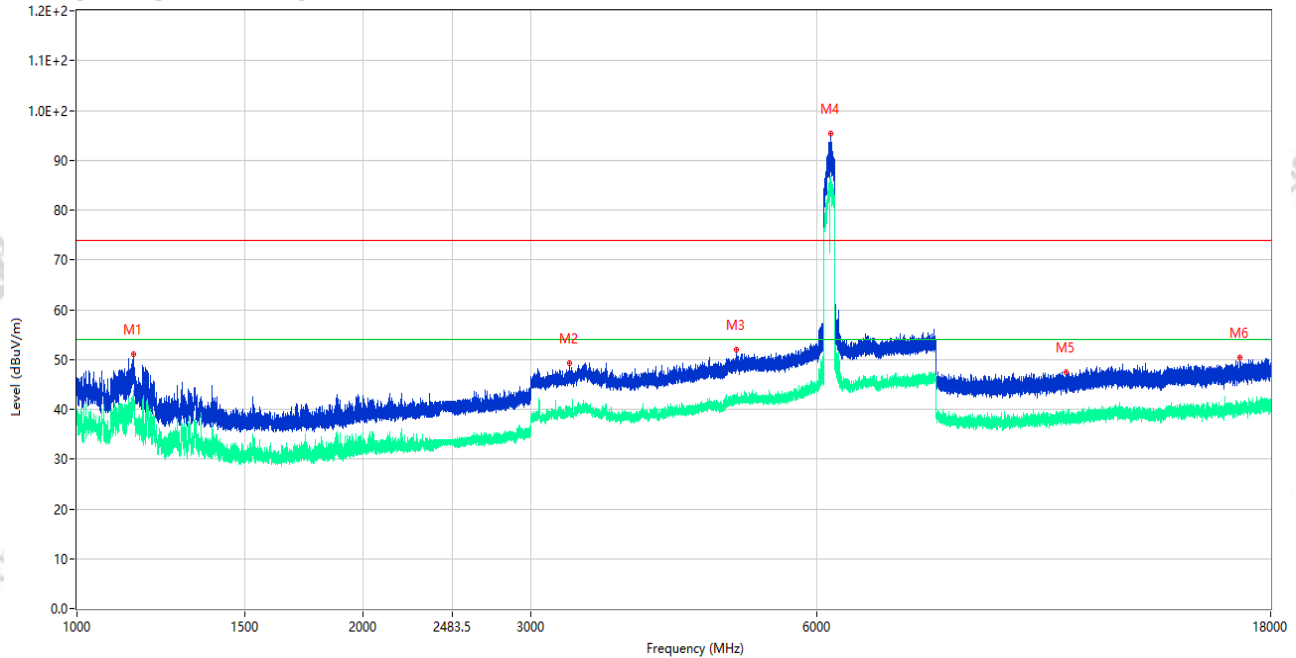

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1146.000	51.02	-15.65	74.0	22.98	Peak	71.00	150	Horizontal	Pass
1**	1146.000	42.62	-15.65	54.0	11.38	AV	71.00	150	Horizontal	Pass
2	3296.000	49.20	-6.83	74.0	24.80	Peak	250.00	150	Horizontal	Pass
2**	3296.000	38.97	-6.83	54.0	15.03	AV	250.00	150	Horizontal	Pass
3	4942.500	52.01	-1.75	74.0	21.99	Peak	284.00	150	Horizontal	Pass
3**	4942.500	42.86	-1.75	54.0	11.14	AV	284.00	150	Horizontal	Pass
4	6198.500	95.27	-0.74	74.0	-21.27	Peak	81.00	150	Horizontal	N/A
4**	6198.500	85.45	-0.74	54.0	-31.45	AV	81.00	150	Horizontal	N/A
5	10957.112	47.47	-3.34	74.0	26.53	Peak	285.00	150	Horizontal	Pass
5**	10957.112	38.32	-3.34	54.0	15.68	AV	285.00	150	Horizontal	Pass
6	16715.062	50.39	-1.63	74.0	23.61	Peak	0.00	150	Horizontal	Pass
6**	16715.062	40.53	-1.63	54.0	13.47	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_20.35.57

EUT Name: Tablet

Temp.(°C): 23.1

Model Number: Inventus SD1

Humidity (%RH): 54

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 be20 CH45 P=4.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

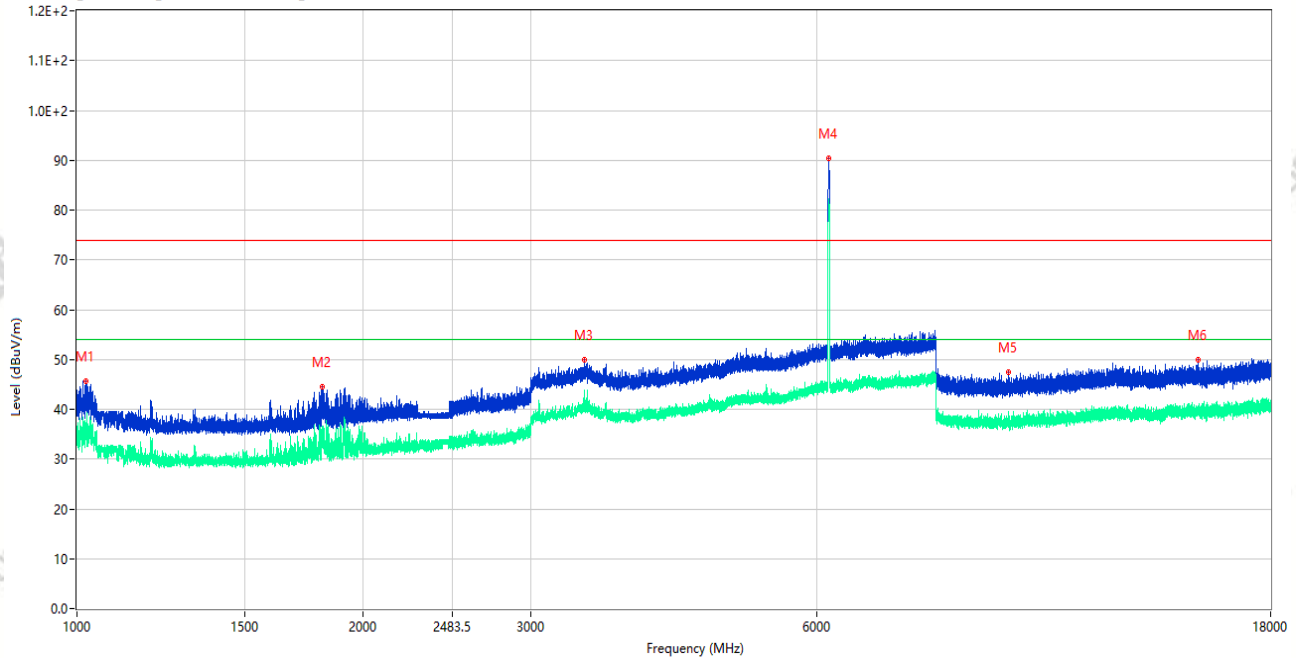

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1021.400	45.59	-15.24	74.0	28.41	Peak	70.00	150	Vertical	Pass
1**	1021.400	36.57	-15.24	54.0	17.43	AV	70.00	150	Vertical	Pass
2	1812.900	44.42	-16.01	74.0	29.58	Peak	188.00	150	Vertical	Pass
2**	1812.900	36.20	-16.01	54.0	17.80	AV	188.00	150	Vertical	Pass
3	3414.750	49.86	-5.21	74.0	24.14	Peak	360.00	150	Vertical	Pass
3**	3414.750	42.77	-5.21	54.0	11.23	AV	360.00	150	Vertical	Pass
4	6178.000	90.39	-0.62	74.0	-16.39	Peak	233.00	150	Vertical	N/A
4**	6178.000	81.22	-0.62	54.0	-27.22	AV	233.00	150	Vertical	N/A
5	9549.688	47.48	-2.51	74.0	26.52	Peak	72.00	150	Vertical	Pass
5**	9549.688	37.03	-2.51	54.0	16.97	AV	72.00	150	Vertical	Pass
6	15084.151	49.91	-1.74	74.0	24.09	Peak	47.00	150	Vertical	Pass
6**	15084.151	39.84	-1.74	54.0	14.16	AV	47.00	150	Vertical	Pass


Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_20.29.13

EUT Name:	Tablet	Temp.(°C):	23.1
Model Number:	Inventus SD1	Humidity (%RH):	54
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII5 be20 CH45 P=4.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT8

RE Test case FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

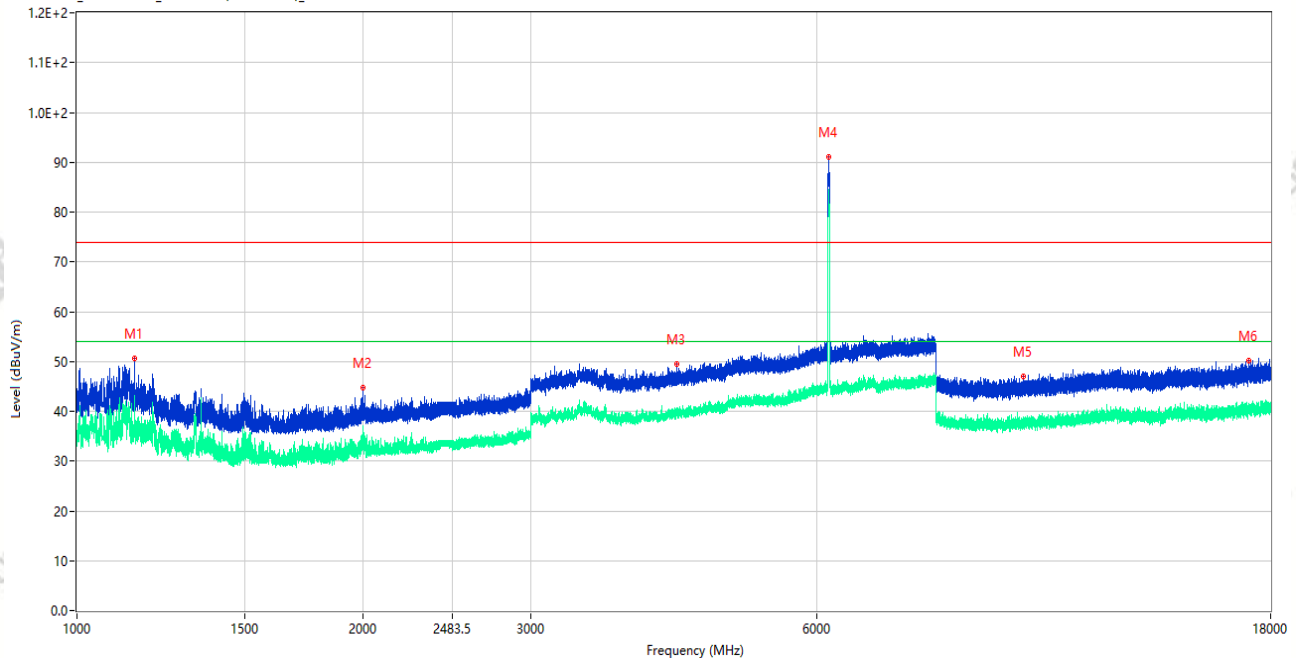

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1150.600	50.60	-15.65	74.0	23.40	Peak	254.00	150	Horizontal	Pass
1**	1150.600	41.87	-15.65	54.0	12.13	AV	254.00	150	Horizontal	Pass
2	2000.900	44.72	-14.29	74.0	29.28	Peak	136.00	150	Horizontal	Pass
2**	2000.900	33.90	-14.29	54.0	20.10	AV	136.00	150	Horizontal	Pass
3	4271.000	49.41	-3.33	74.0	24.59	Peak	250.00	150	Horizontal	Pass
3**	4271.000	39.56	-3.33	54.0	14.44	AV	250.00	150	Horizontal	Pass
4	6173.500	91.13	-0.48	74.0	-17.13	Peak	98.00	150	Horizontal	N/A
4**	6173.500	82.95	-0.48	54.0	-28.95	AV	98.00	150	Horizontal	N/A
5	9890.737	46.95	-4.22	74.0	27.05	Peak	333.00	150	Horizontal	Pass
5**	9890.737	37.78	-4.22	54.0	16.22	AV	333.00	150	Horizontal	Pass
6	17088.074	50.10	-0.76	74.0	23.90	Peak	82.00	150	Horizontal	Pass
6**	17088.074	40.64	-0.76	54.0	13.36	AV	82.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-19_22.55.05

EUT Name: Tablet

Temp.(°C): 23.3

Model Number: Inventus SD1

Humidity (%RH): 52

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 be40 CH43 P=6


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

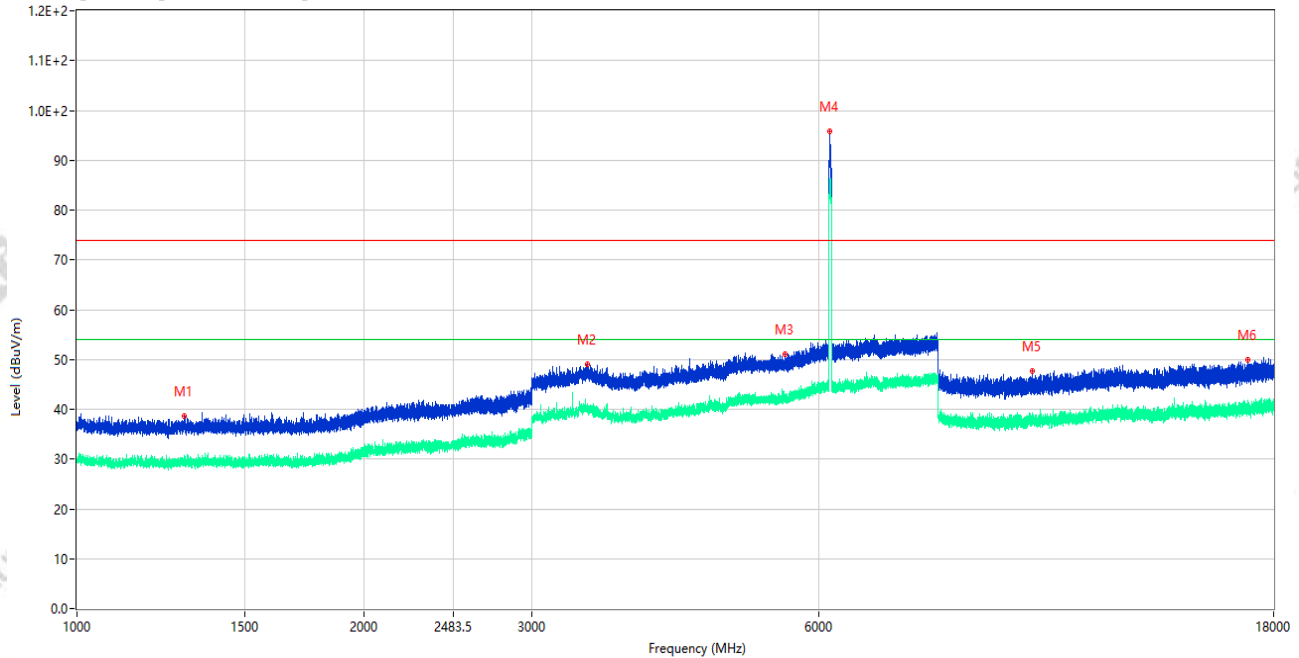

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1296.900	38.71	-15.68	74.0	35.29	Peak	303.00	150	Vertical	Pass
1**	1296.900	29.37	-15.68	54.0	24.63	AV	303.00	150	Vertical	Pass
2	3434.000	48.93	-5.17	74.0	25.07	Peak	360.00	150	Vertical	Pass
2**	3434.000	39.48	-5.17	54.0	14.52	AV	360.00	150	Vertical	Pass
3	5529.750	51.11	-2.50	74.0	22.89	Peak	314.00	150	Vertical	Pass
3**	5529.750	42.21	-2.50	54.0	11.79	AV	314.00	150	Vertical	Pass
4	6161.500	95.75	-0.28	74.0	-21.75	Peak	245.00	150	Vertical	N/A
4**	6161.500	84.13	-0.28	54.0	-30.13	AV	245.00	150	Vertical	N/A
5	10053.188	47.73	-3.96	74.0	26.27	Peak	123.00	150	Vertical	Pass
5**	10053.188	37.69	-3.96	54.0	16.31	AV	123.00	150	Vertical	Pass
6	16900.650	49.85	-0.92	74.0	24.15	Peak	360.00	150	Vertical	Pass
6**	16900.650	40.10	-0.92	54.0	13.90	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-19_22.50.46

EUT Name: Tablet

Temp.(°C): 23.3

Model Number: Inventus SD1

Humidity (%RH): 52

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 be40 CH43 P=6


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

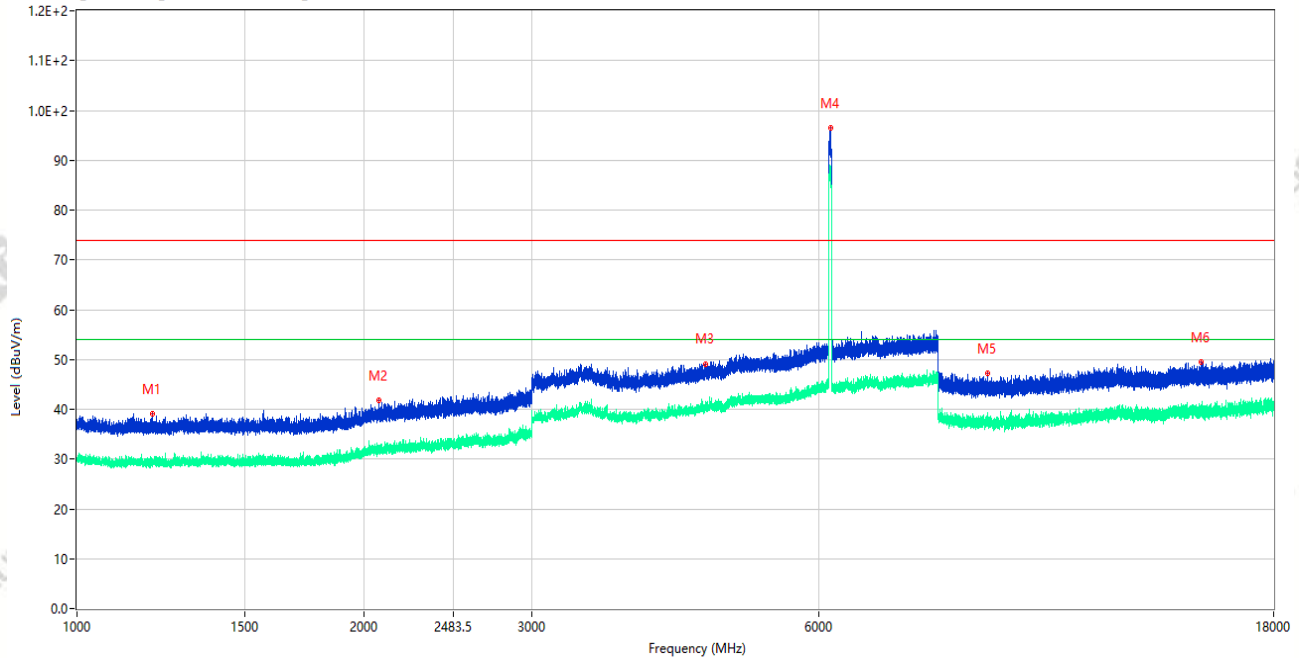

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1199.500	39.08	-15.75	74.0	34.92	Peak	263.00	150	Horizontal	Pass
1**	1199.500	28.94	-15.75	54.0	25.06	AV	263.00	150	Horizontal	Pass
2	2071.100	41.80	-13.74	74.0	32.20	Peak	0.00	150	Horizontal	Pass
2**	2071.100	31.98	-13.74	54.0	22.02	AV	0.00	150	Horizontal	Pass
3	4560.000	49.15	-2.68	74.0	24.85	Peak	58.00	150	Horizontal	Pass
3**	4560.000	41.10	-2.68	54.0	12.90	AV	58.00	150	Horizontal	Pass
4	6169.000	96.50	-0.38	74.0	-22.50	Peak	194.00	150	Horizontal	N/A
4**	6169.000	88.53	-0.38	54.0	-34.53	AV	194.00	150	Horizontal	N/A
5	9014.362	47.21	-4.67	74.0	26.79	Peak	100.00	150	Horizontal	Pass
5**	9014.362	37.60	-4.67	54.0	16.40	AV	100.00	150	Horizontal	Pass
6	15090.975	49.46	-1.93	74.0	24.54	Peak	210.00	150	Horizontal	Pass
6**	15090.975	40.46	-1.93	54.0	13.54	AV	210.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_19.52.12

EUT Name: Tablet

Temp.(°C): 23.1

Model Number: Inventus SD1

Humidity (%RH): 54

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 be80 CH39 P=9.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

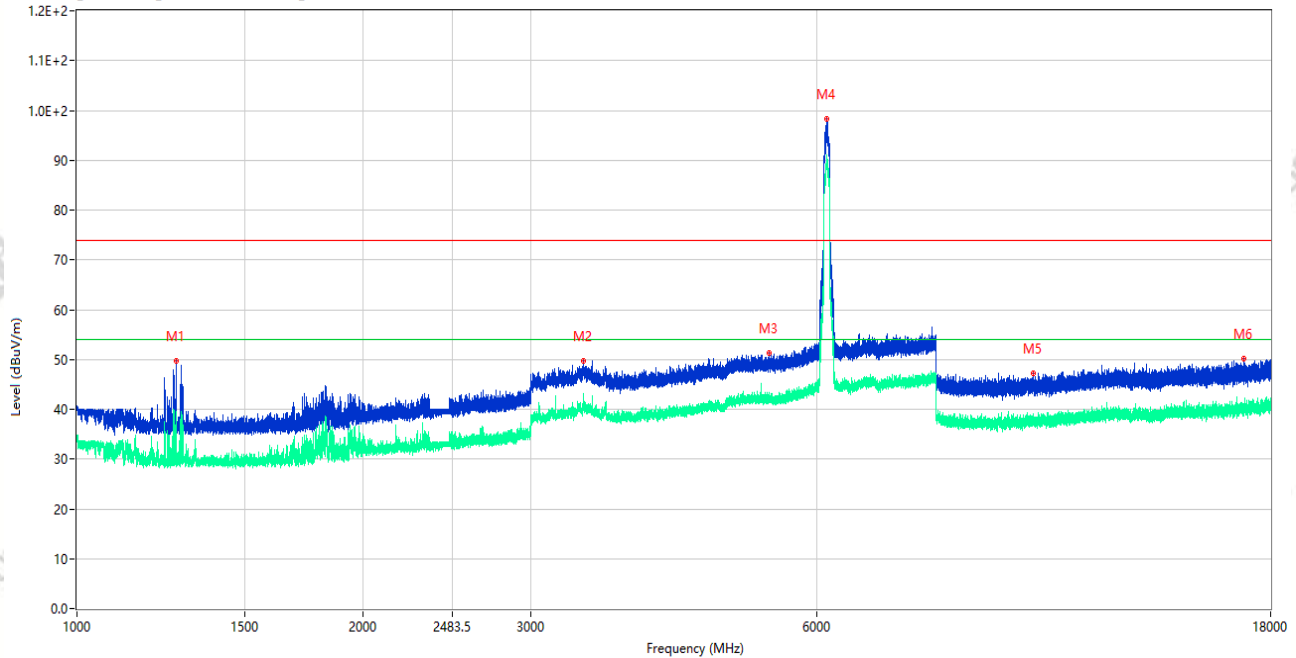

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1271.100	49.80	-15.88	74.0	24.20	Peak	235.00	150	Vertical	Pass
1**	1271.100	36.37	-15.88	54.0	17.63	AV	235.00	150	Vertical	Pass
2	3408.250	49.80	-5.35	74.0	24.20	Peak	1.00	150	Vertical	Pass
2**	3408.250	40.85	-5.35	54.0	13.15	AV	1.00	150	Vertical	Pass
3	5344.500	51.28	-2.00	74.0	22.72	Peak	129.00	150	Vertical	Pass
3**	5344.500	42.48	-2.00	54.0	11.52	AV	129.00	150	Vertical	Pass
4	6146.500	98.21	-0.22	74.0	-24.21	Peak	264.00	150	Vertical	N/A
4**	6146.500	89.92	-0.22	54.0	-35.92	AV	264.00	150	Vertical	N/A
5	10132.275	47.19	-3.90	74.0	26.81	Peak	0.00	150	Vertical	Pass
5**	10132.275	37.47	-3.90	54.0	16.53	AV	0.00	150	Vertical	Pass
6	16848.412	50.10	-1.10	74.0	23.90	Peak	247.00	150	Vertical	Pass
6**	16848.412	40.17	-1.10	54.0	13.83	AV	247.00	150	Vertical	Pass


Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_19.48.00

EUT Name:	Tablet	Temp.(°C):	23.1
Model Number:	Inventus SD1	Humidity (%RH):	54
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII5 be80 CH39 P=9.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT8

RE Test case FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

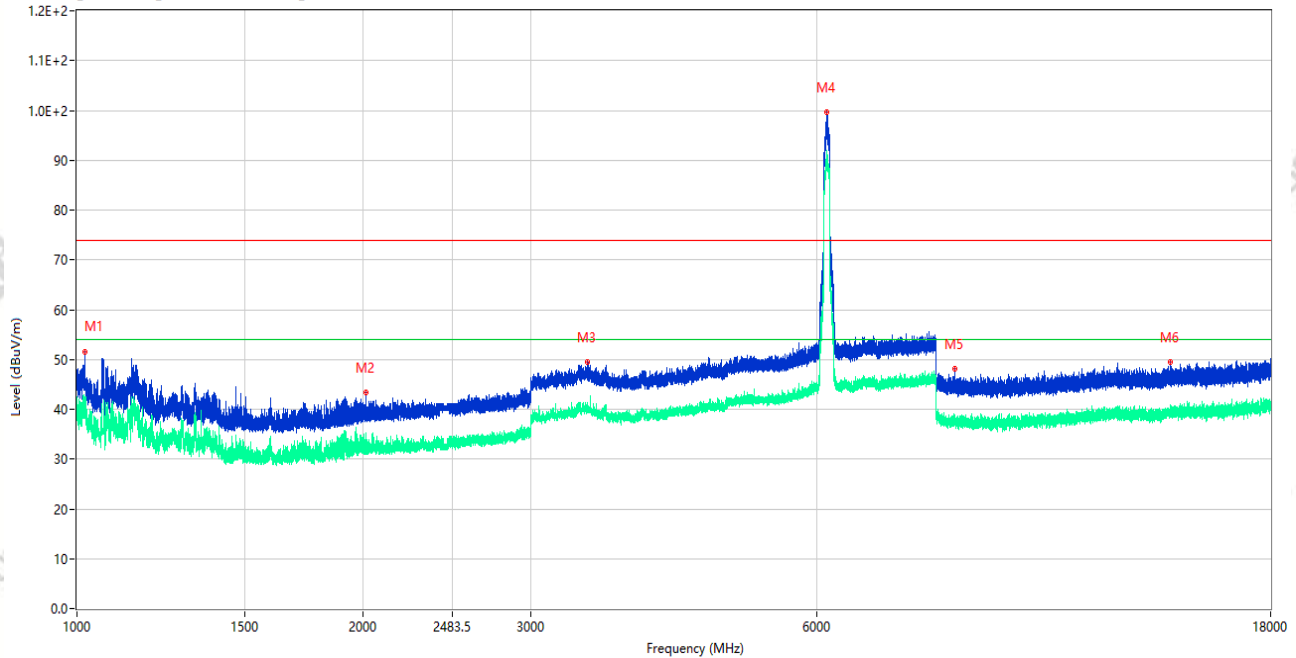

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1018.400	51.63	-14.97	74.0	22.37	Peak	100.00	150	Horizontal	Pass
1**	1018.400	39.05	-14.97	54.0	14.95	AV	100.00	150	Horizontal	Pass
2	2012.500	43.32	-14.22	74.0	30.68	Peak	304.00	150	Horizontal	Pass
2**	2012.500	32.19	-14.22	54.0	21.81	AV	304.00	150	Horizontal	Pass
3	3439.750	49.49	-5.28	74.0	24.51	Peak	358.00	150	Horizontal	Pass
3**	3439.750	39.60	-5.28	54.0	14.40	AV	358.00	150	Horizontal	Pass
4	6147.500	99.61	-0.23	74.0	-25.61	Peak	112.00	150	Horizontal	N/A
4**	6147.500	91.04	-0.23	54.0	-37.04	AV	112.00	150	Horizontal	N/A
5	8370.500	48.05	-4.44	74.0	25.95	Peak	360.00	150	Horizontal	Pass
5**	8370.500	37.55	-4.44	54.0	16.45	AV	360.00	150	Horizontal	Pass
6	14108.174	49.41	-1.49	74.0	24.59	Peak	0.00	150	Horizontal	Pass
6**	14108.174	38.90	-1.49	54.0	15.10	AV	0.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_20.10.10

EUT Name:	Tablet	Temp.(°C):	23.1
Model Number:	Inventus SD1	Humidity (%RH):	54
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII5 be160 CH47 P=13
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT8

RE Test case FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

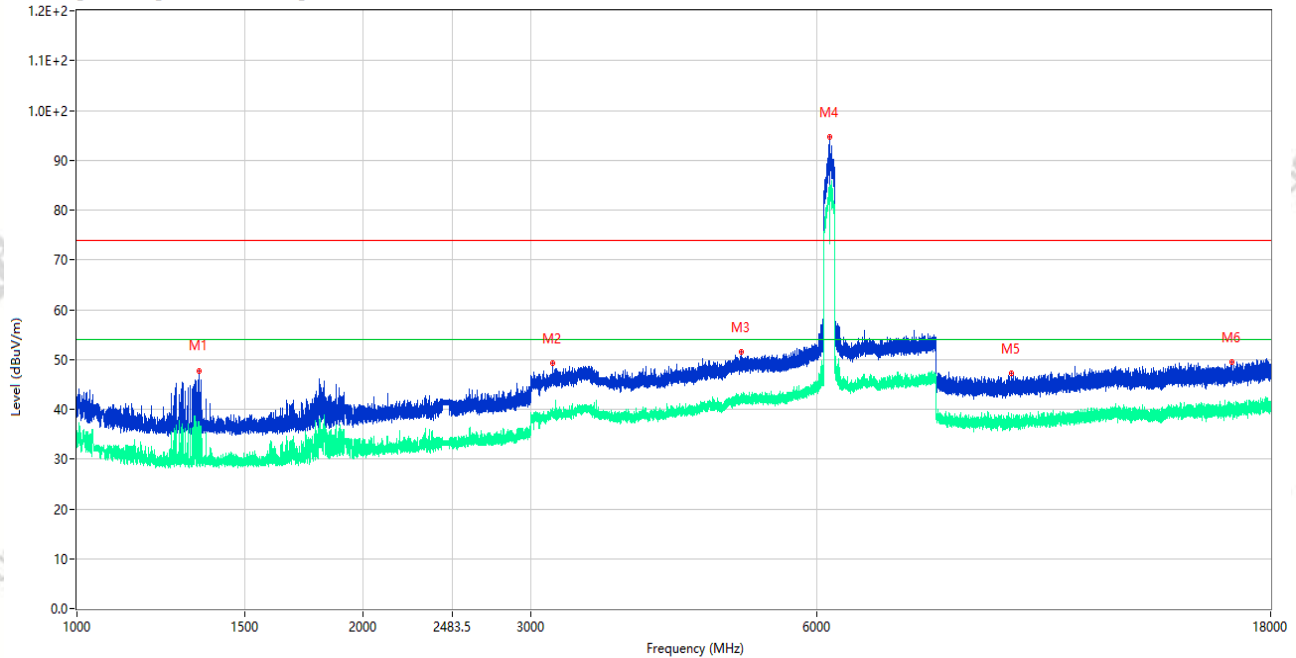

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1343.900	47.77	-16.05	74.0	26.23	Peak	201.00	150	Vertical	Pass
1**	1343.900	36.83	-16.05	54.0	17.17	AV	201.00	150	Vertical	Pass
2	3163.250	49.34	-7.11	74.0	24.66	Peak	1.00	150	Vertical	Pass
2**	3163.250	39.21	-7.11	54.0	14.79	AV	1.00	150	Vertical	Pass
3	4991.750	51.62	-2.34	74.0	22.38	Peak	228.00	150	Vertical	Pass
3**	4991.750	41.46	-2.34	54.0	12.54	AV	228.00	150	Vertical	Pass
4	6191.250	94.76	-0.65	74.0	-20.76	Peak	261.00	150	Vertical	N/A
4**	6191.250	83.02	-0.65	54.0	-29.02	AV	261.00	150	Vertical	N/A
5	9614.050	47.17	-3.30	74.0	26.83	Peak	360.00	150	Vertical	Pass
5**	9614.050	37.91	-3.30	54.0	16.09	AV	360.00	150	Vertical	Pass
6	16394.812	49.46	-1.18	74.0	24.54	Peak	211.00	150	Vertical	Pass
6**	16394.812	41.22	-1.18	54.0	12.78	AV	211.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_20.05.40

EUT Name: Tablet

Temp.(°C): 23.1

Model Number: Inventus SD1

Humidity (%RH): 54

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 be160 CH47 P=13


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

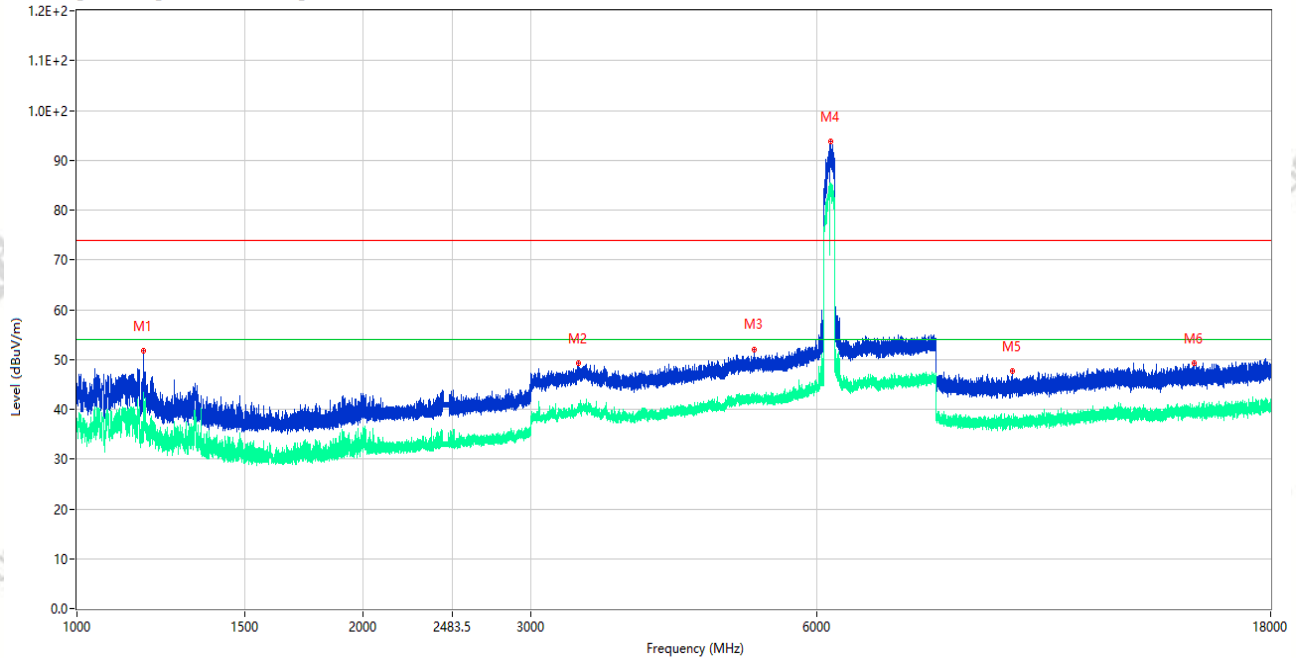

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1174.900	51.82	-15.64	74.0	22.18	Peak	264.00	150	Horizontal	Pass
1**	1174.900	40.47	-15.64	54.0	13.53	AV	264.00	150	Horizontal	Pass
2	3366.000	49.17	-5.08	74.0	24.83	Peak	360.00	150	Horizontal	Pass
2**	3366.000	40.61	-5.08	54.0	13.39	AV	360.00	150	Horizontal	Pass
3	5157.500	51.90	-2.05	74.0	22.10	Peak	27.00	150	Horizontal	Pass
3**	5157.500	41.57	-2.05	54.0	12.43	AV	27.00	150	Horizontal	Pass
4	6208.250	93.78	-0.76	74.0	-19.78	Peak	94.00	150	Horizontal	N/A
4**	6208.250	84.72	-0.76	54.0	-30.72	AV	94.00	150	Horizontal	N/A
5	9641.125	47.62	-3.26	74.0	26.38	Peak	192.00	150	Horizontal	Pass
5**	9641.125	36.86	-3.26	54.0	17.14	AV	192.00	150	Horizontal	Pass
6	14950.537	49.26	-1.41	74.0	24.74	Peak	213.00	150	Horizontal	Pass
6**	14950.537	39.79	-1.41	54.0	14.21	AV	213.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_20.17.36

EUT Name: Tablet

Temp.(°C): 23.1

Model Number: Inventus SD1

Humidity (%RH): 54

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII5 be320 CH63 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

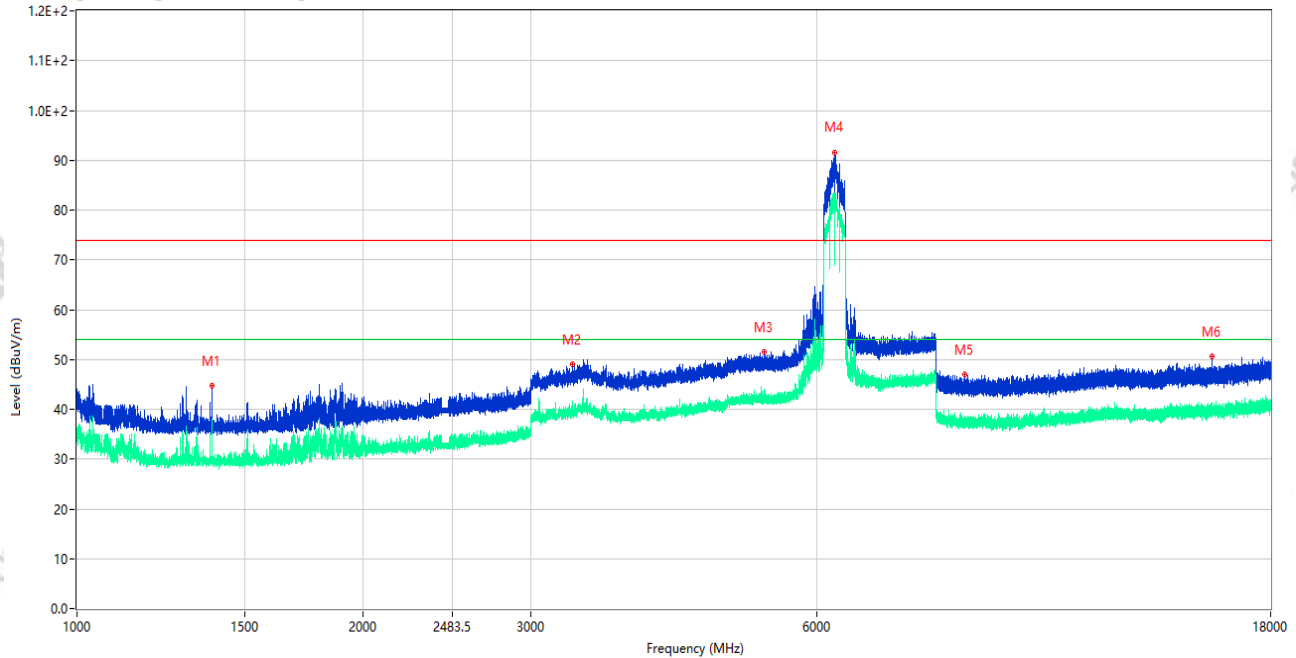

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1387.200	44.68	-15.99	74.0	29.32	Peak	204.00	150	Vertical	Pass
1**	1387.200	32.92	-15.99	54.0	21.08	AV	204.00	150	Vertical	Pass
2	3316.250	49.08	-6.39	74.0	24.92	Peak	193.00	150	Vertical	Pass
2**	3316.250	40.22	-6.39	54.0	13.78	AV	193.00	150	Vertical	Pass
3	5285.250	51.42	-2.14	74.0	22.58	Peak	260.00	150	Vertical	Pass
3**	5285.250	42.81	-2.14	54.0	11.19	AV	260.00	150	Vertical	Pass
4	6259.500	91.63	-0.94	74.0	-17.63	Peak	260.00	150	Vertical	N/A
4**	6259.500	82.57	-0.94	54.0	-28.57	AV	260.00	150	Vertical	N/A
5	8585.675	47.00	-5.17	74.0	27.00	Peak	194.00	150	Vertical	Pass
5**	8585.675	36.83	-5.17	54.0	17.17	AV	194.00	150	Vertical	Pass
6	15625.162	50.63	-1.57	74.0	23.37	Peak	108.00	150	Vertical	Pass
6**	15625.162	39.95	-1.57	54.0	14.05	AV	108.00	150	Vertical	Pass


Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_20.22.39

EUT Name:	Tablet	Temp.(°C):	23.1
Model Number:	Inventus SD1	Humidity (%RH):	54
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII5 be320 CH63 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT8

RE Test case FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

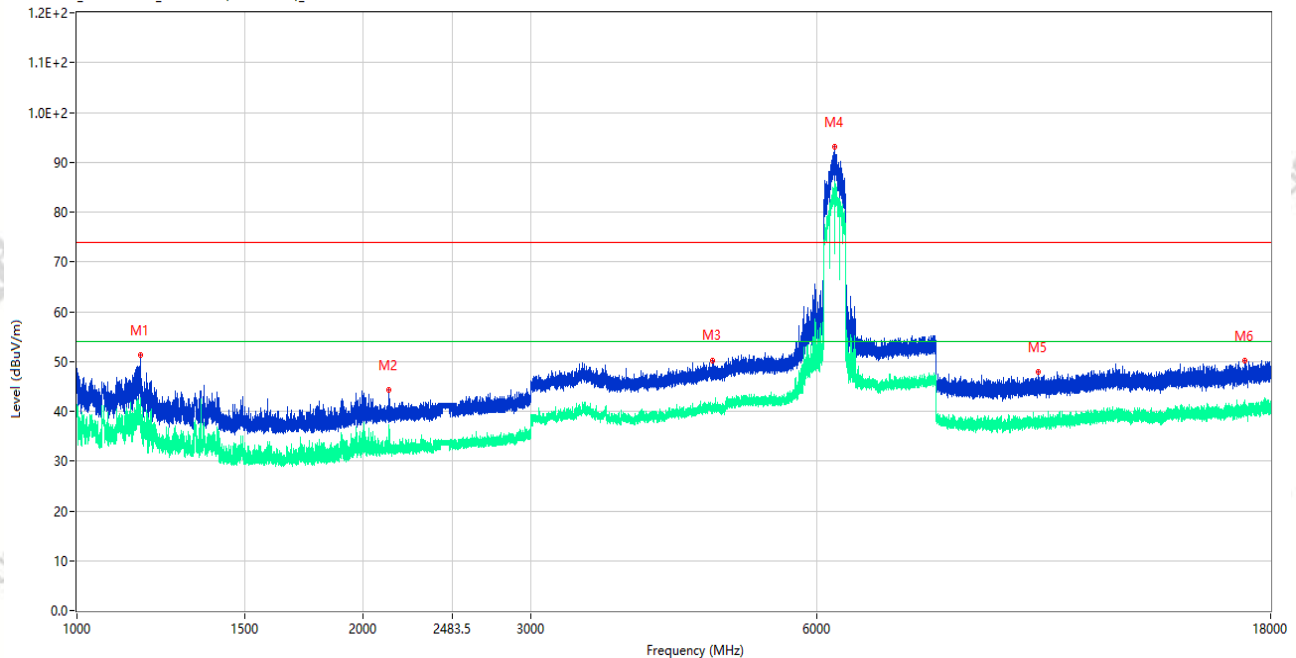

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1166.000	51.33	-15.45	74.0	22.67	Peak	253.00	150	Horizontal	Pass
1**	1166.000	39.22	-15.45	54.0	14.78	AV	253.00	150	Horizontal	Pass
2	2127.600	44.24	-13.26	74.0	29.76	Peak	139.00	150	Horizontal	Pass
2**	2127.600	31.99	-13.26	54.0	22.01	AV	139.00	150	Horizontal	Pass
3	4661.750	50.28	-3.42	74.0	23.72	Peak	213.00	150	Horizontal	Pass
3**	4661.750	40.07	-3.42	54.0	13.93	AV	213.00	150	Horizontal	Pass
4	6262.000	93.16	-0.92	74.0	-19.16	Peak	80.00	150	Horizontal	N/A
4**	6262.000	83.89	-0.92	54.0	-29.89	AV	80.00	150	Horizontal	N/A
5	10257.200	47.83	-3.16	74.0	26.17	Peak	214.00	150	Horizontal	Pass
5**	10257.200	37.78	-3.16	54.0	16.22	AV	214.00	150	Horizontal	Pass
6	16894.088	50.24	-0.52	74.0	23.76	Peak	80.00	150	Horizontal	Pass
6**	16894.088	40.71	-0.52	54.0	13.29	AV	80.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-23_09.48.21

EUT Name: Tablet

Temp.(°C): 23.5

Model Number: Inventus SD1

Humidity (%RH): 46

Sample Number: CC26060330-001-S07

Pressure(kPa): 101


Test Standard: 47 CFR Part 15E

Work Mode: Normal working Link(6G)

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

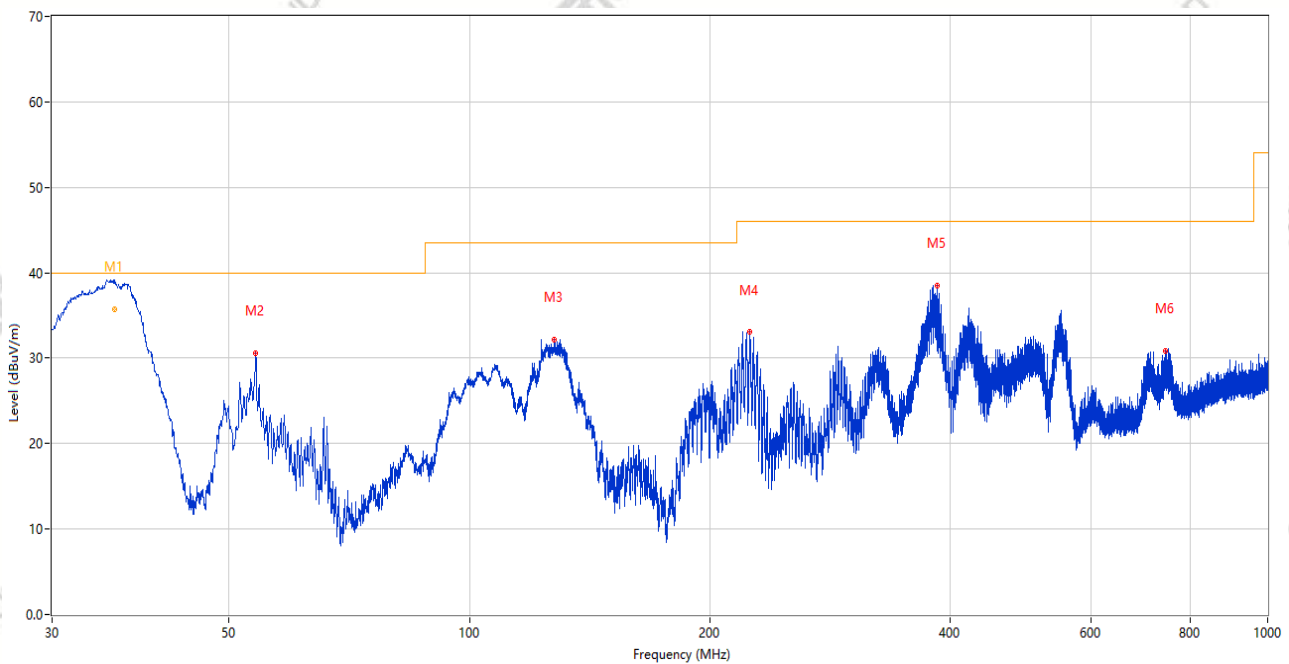Remark: 适配器: A01+数据线: A08
ANT8

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	35.917	39.21	-27.52	40.0	0.79	Peak	129.00	100	Vertical	Pass
1*	35.917	35.72	-27.52	40.0	4.28	QP	129.00	100	Vertical	Pass
2	54.008	30.58	-25.08	40.0	9.42	Peak	207.00	100	Vertical	Pass
3	127.631	32.17	-29.11	43.5	11.33	Peak	307.00	100	Vertical	Pass
4	224.582	33.03	-25.65	46.0	12.97	Peak	31.00	200	Vertical	Pass
5	385.117	38.51	-21.19	46.0	7.49	Peak	234.00	200	Vertical	Pass
6	744.890	30.82	-12.57	46.0	15.18	Peak	129.00	100	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-23_09.46.56

EUT Name: Tablet

Temp.(°C): 23.5

Model Number: Inventus SD1

Humidity (%RH): 46

Sample Number: CC26060330-001-S07

Pressure(kPa): 101


Test Standard: 47 CFR Part 15E

Work Mode: Normal working Link(6G)

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

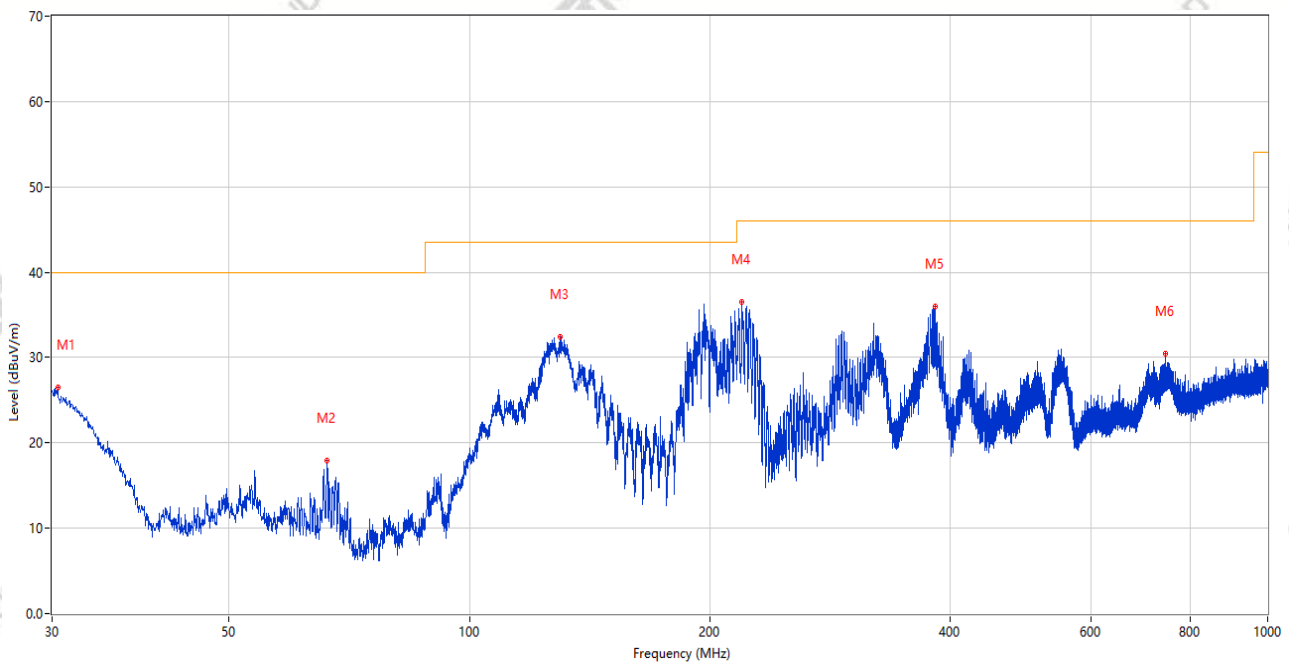Remark: 适配器: A01+数据线: A08
ANT8

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.485	26.51	-29.06	40.0	13.49	Peak	302.00	200	Horizontal	Pass
2	66.326	17.98	-27.91	40.0	22.02	Peak	191.00	100	Horizontal	Pass
3	130.055	32.49	-29.29	43.5	11.01	Peak	252.00	100	Horizontal	Pass
4	219.441	36.47	-26.02	46.0	9.53	Peak	227.00	100	Horizontal	Pass
5	382.789	36.02	-21.28	46.0	9.98	Peak	77.00	100	Horizontal	Pass
6	744.162	30.47	-12.59	46.0	15.53	Peak	7.00	200	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_22.19.46

EUT Name: Tablet

Temp.(°C): 23.1

Model Number: Inventus SD1

Humidity (%RH): 54

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 ax20 CH213 P=7


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

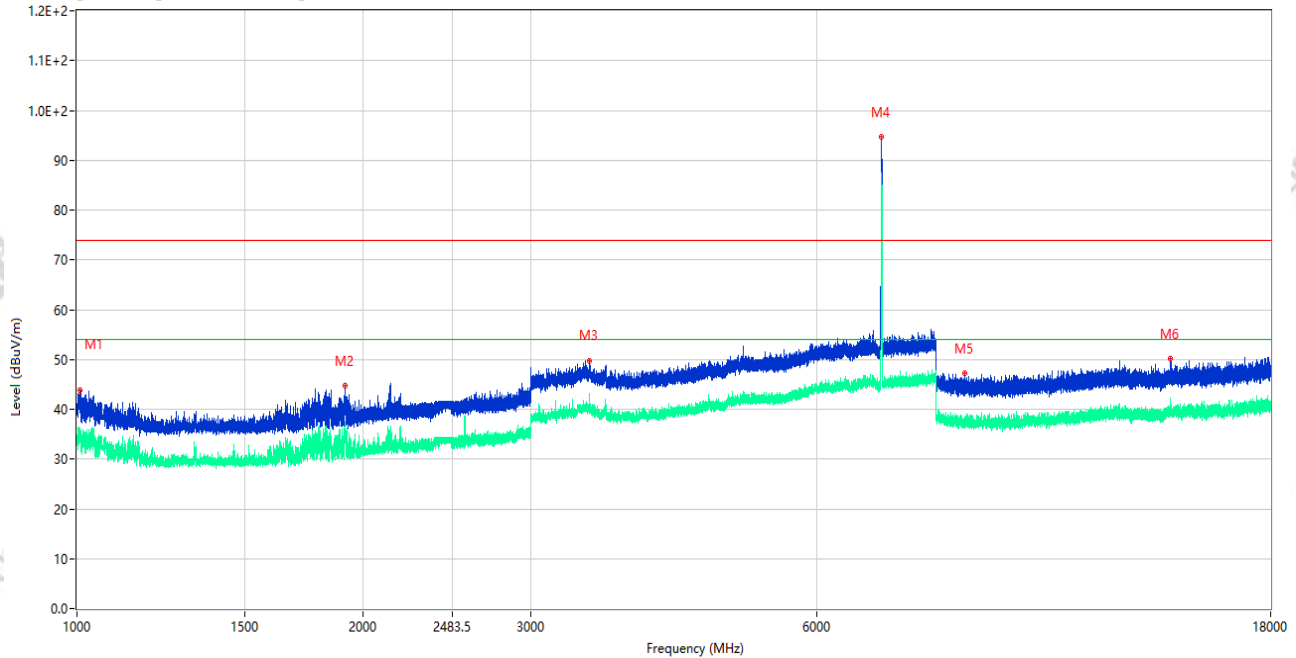

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1007.000	43.95	-14.20	74.0	30.05	Peak	11.00	150	Vertical	Pass
1**	1007.000	33.86	-14.20	54.0	20.14	AV	11.00	150	Vertical	Pass
2	1913.300	44.67	-15.46	74.0	29.33	Peak	185.00	150	Vertical	Pass
2**	1913.300	36.39	-15.46	54.0	17.61	AV	185.00	150	Vertical	Pass
3	3460.750	49.83	-4.96	74.0	24.17	Peak	360.00	150	Vertical	Pass
3**	3460.750	42.31	-4.96	54.0	11.69	AV	360.00	150	Vertical	Pass
4	7014.250	94.77	0.57	74.0	-20.77	Peak	280.00	150	Vertical	N/A
4**	7014.250	86.90	0.57	54.0	-32.90	AV	280.00	150	Vertical	N/A
5	8590.900	47.14	-4.89	74.0	26.86	Peak	360.00	150	Vertical	Pass
5**	8590.900	37.01	-4.89	54.0	16.99	AV	360.00	150	Vertical	Pass
6	14112.113	50.18	-1.16	74.0	23.82	Peak	143.00	150	Vertical	Pass
6**	14112.113	39.50	-1.16	54.0	14.50	AV	143.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_22.15.30

EUT Name: Tablet

Temp.(°C): 23.1

Model Number: Inventus SD1

Humidity (%RH): 54

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 ax20 CH213 P=7


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

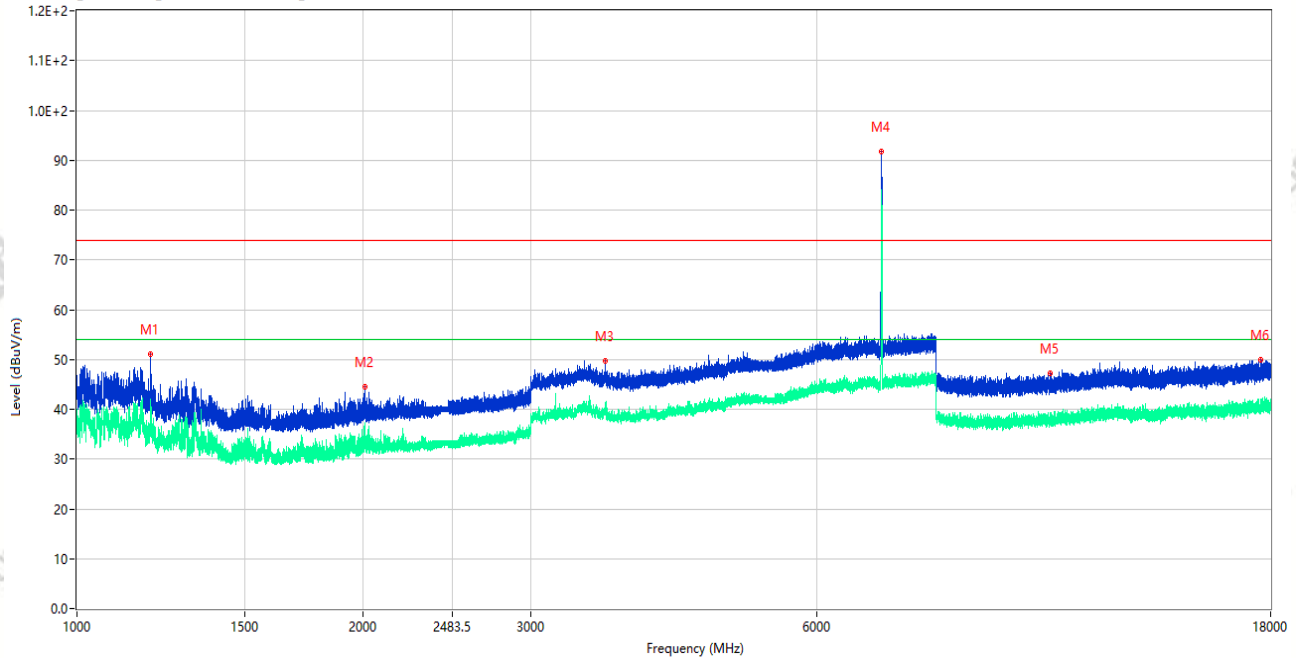

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1195.000	51.09	-15.75	74.0	22.91	Peak	256.00	150	Horizontal	Pass
1**	1195.000	37.73	-15.75	54.0	16.27	AV	256.00	150	Horizontal	Pass
2	2006.600	44.53	-14.22	74.0	29.47	Peak	137.00	150	Horizontal	Pass
2**	2006.600	34.67	-14.22	54.0	19.33	AV	137.00	150	Horizontal	Pass
3	3598.000	49.70	-5.09	74.0	24.30	Peak	144.00	150	Horizontal	Pass
3**	3598.000	40.69	-5.09	54.0	13.31	AV	144.00	150	Horizontal	Pass
4	7014.250	91.66	0.57	74.0	-17.66	Peak	111.00	150	Horizontal	N/A
4**	7014.250	83.86	0.57	54.0	-29.86	AV	111.00	150	Horizontal	N/A
5	10565.238	47.19	-3.21	74.0	26.81	Peak	360.00	150	Horizontal	Pass
5**	10565.238	38.39	-3.21	54.0	15.61	AV	360.00	150	Horizontal	Pass
6	17592.074	50.02	0.70	74.0	23.98	Peak	345.00	150	Horizontal	Pass
6**	17592.074	40.41	0.70	54.0	13.59	AV	345.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_22.39.36

EUT Name:	Tablet	Temp.(°C):	23.1
Model Number:	Inventus SD1	Humidity (%RH):	54
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII8 ax40 CH211 P=8.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT8

RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

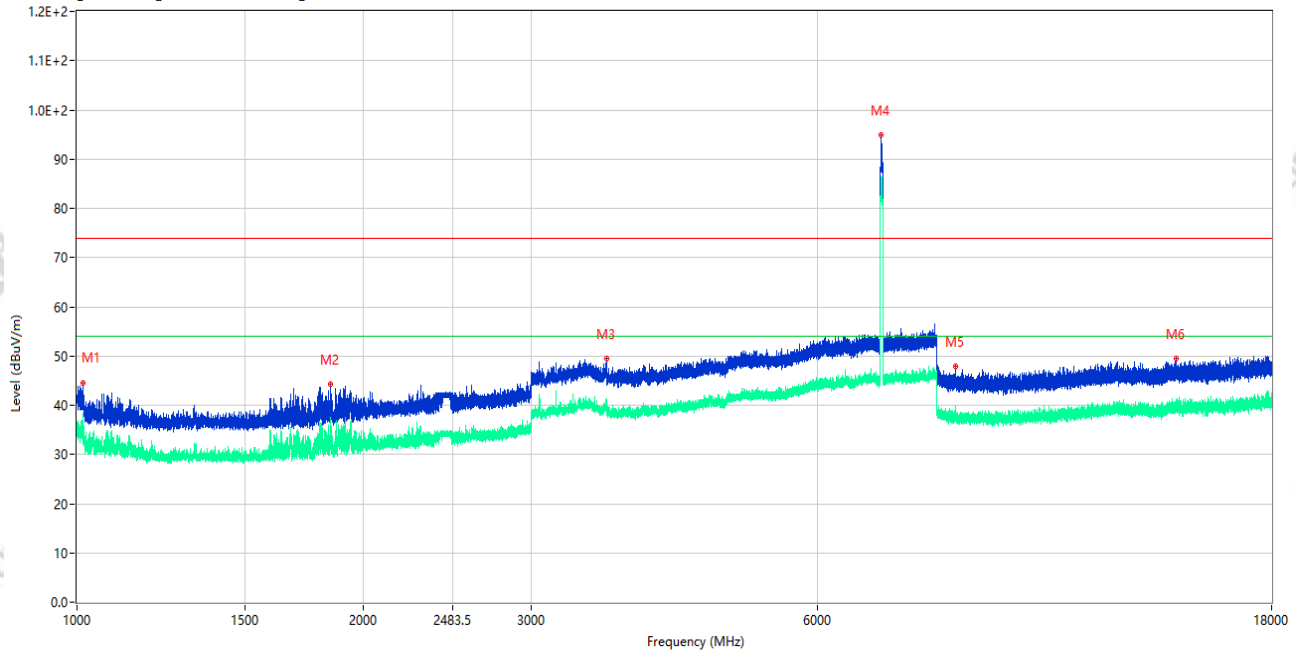

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1015.000	44.52	-14.62	74.0	29.48	Peak	82.00	150	Vertical	Pass
1**	1015.000	35.74	-14.62	54.0	18.26	AV	82.00	150	Vertical	Pass
2	1847.000	44.18	-15.79	74.0	29.82	Peak	181.00	150	Vertical	Pass
2**	1847.000	35.66	-15.79	54.0	18.34	AV	181.00	150	Vertical	Pass
3	3599.500	49.47	-4.99	74.0	24.53	Peak	360.00	150	Vertical	Pass
3**	3599.500	41.30	-4.99	54.0	12.70	AV	360.00	150	Vertical	Pass
4	7001.250	94.96	0.19	74.0	-20.96	Peak	261.00	150	Vertical	N/A
4**	7001.250	85.17	0.19	54.0	-31.17	AV	261.00	150	Vertical	N/A
5	8373.112	47.83	-4.42	74.0	26.17	Peak	240.00	150	Vertical	Pass
5**	8373.112	38.21	-4.42	54.0	15.79	AV	240.00	150	Vertical	Pass
6	14293.238	49.43	-2.70	74.0	24.57	Peak	11.00	150	Vertical	Pass
6**	14293.238	39.96	-2.70	54.0	14.04	AV	11.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_22.44.27

EUT Name: Tablet

Temp.(°C): 23.1

Model Number: Inventus SD1

Humidity (%RH): 54

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 ax40 CH211 P=8.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

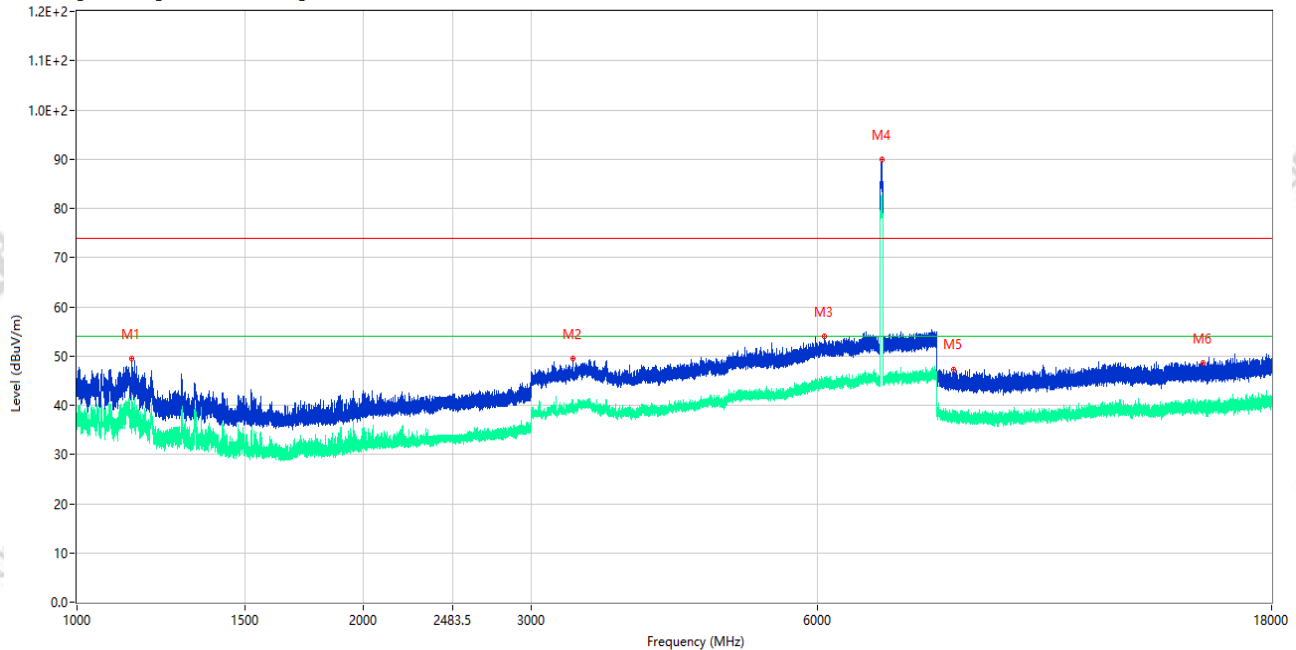

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1140.200	49.51	-15.58	74.0	24.49	Peak	253.00	150	Horizontal	Pass
1**	1140.200	37.92	-15.58	54.0	16.08	AV	253.00	150	Horizontal	Pass
2	3317.250	49.50	-6.37	74.0	24.50	Peak	176.00	150	Horizontal	Pass
2**	3317.250	39.38	-6.37	54.0	14.62	AV	176.00	150	Horizontal	Pass
3	6098.250	53.93	-0.41	74.0	20.07	Peak	360.00	150	Horizontal	Pass
3**	6098.250	44.84	-0.41	54.0	9.16	AV	360.00	150	Horizontal	Pass
4	7009.250	89.95	0.47	74.0	-15.95	Peak	92.00	150	Horizontal	N/A
4**	7009.250	82.94	0.47	54.0	-28.94	AV	92.00	150	Horizontal	N/A
5	8346.513	47.34	-4.43	74.0	26.66	Peak	286.00	150	Horizontal	Pass
5**	8346.513	37.52	-4.43	54.0	16.48	AV	286.00	150	Horizontal	Pass
6	15266.062	48.62	-1.02	74.0	25.38	Peak	277.00	150	Horizontal	Pass
6**	15266.062	39.51	-1.02	54.0	14.49	AV	277.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_22.58.16

EUT Name:	Tablet	Temp.(°C):	23.1
Model Number:	Inventus SD1	Humidity (%RH):	54
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII8 ax80 CH199 P=13
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT8

RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

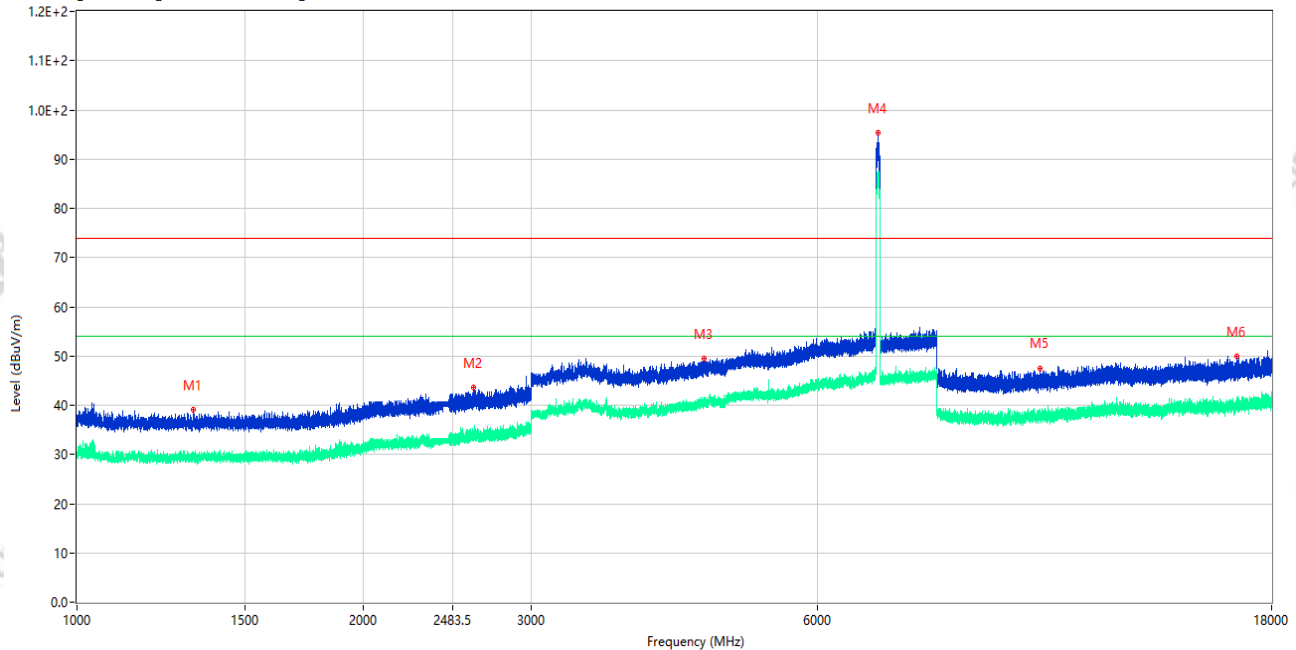

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1324.700	39.18	-15.89	74.0	34.82	Peak	352.00	150	Vertical	Pass
1**	1324.700	30.28	-15.89	54.0	23.72	AV	352.00	150	Vertical	Pass
2	2607.500	43.55	-11.04	74.0	30.45	Peak	233.00	150	Vertical	Pass
2**	2607.500	33.44	-11.04	54.0	20.56	AV	233.00	150	Vertical	Pass
3	4557.250	49.40	-2.77	74.0	24.60	Peak	59.00	150	Vertical	Pass
3**	4557.250	40.76	-2.77	54.0	13.24	AV	59.00	150	Vertical	Pass
4	6947.750	95.33	0.05	74.0	-21.33	Peak	277.00	150	Vertical	N/A
4**	6947.750	86.12	0.05	54.0	-32.12	AV	277.00	150	Vertical	N/A
5	10268.599	47.56	-2.96	74.0	26.44	Peak	289.00	150	Vertical	Pass
5**	10268.599	38.06	-2.96	54.0	15.94	AV	289.00	150	Vertical	Pass
6	16546.012	49.90	-1.27	74.0	24.10	Peak	243.00	150	Vertical	Pass
6**	16546.012	40.77	-1.27	54.0	13.23	AV	243.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_22.51.49

EUT Name: Tablet

Temp.(°C): 23.1

Model Number: Inventus SD1

Humidity (%RH): 54

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 ax80 CH199 P=13


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

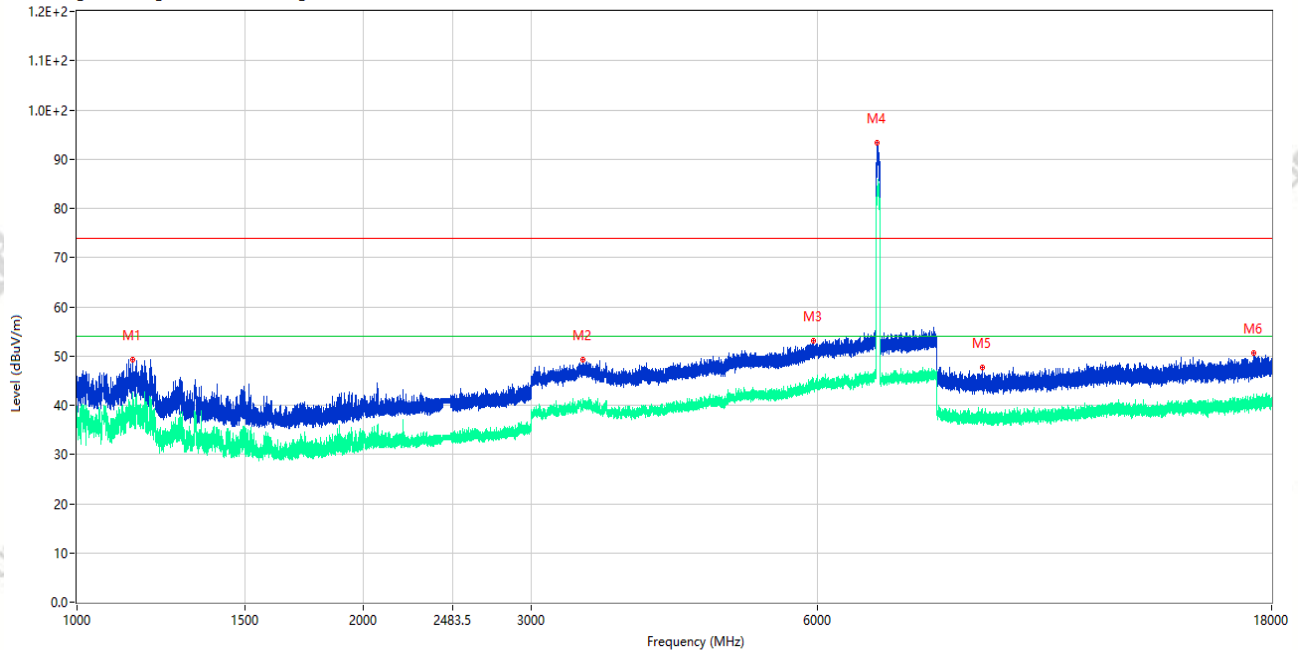

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1143.300	49.34	-15.60	74.0	24.66	Peak	253.00	150	Horizontal	Pass
1**	1143.300	39.37	-15.60	54.0	14.63	AV	253.00	150	Horizontal	Pass
2	3397.000	49.31	-5.81	74.0	24.69	Peak	225.00	150	Horizontal	Pass
2**	3397.000	40.77	-5.81	54.0	13.23	AV	225.00	150	Horizontal	Pass
3	5934.250	53.09	-0.00	74.0	20.91	Peak	278.00	150	Horizontal	Pass
3**	5934.250	43.51	-0.00	54.0	10.49	AV	278.00	150	Horizontal	Pass
4	6932.250	93.24	-0.04	74.0	-19.24	Peak	90.00	150	Horizontal	N/A
4**	6932.250	83.03	-0.04	54.0	-29.03	AV	90.00	150	Horizontal	N/A
5	8937.888	47.66	-4.32	74.0	26.34	Peak	262.00	150	Horizontal	Pass
5**	8937.888	37.60	-4.32	54.0	16.40	AV	262.00	150	Horizontal	Pass
6	17250.562	50.51	-0.59	74.0	23.49	Peak	75.00	150	Horizontal	Pass
6**	17250.562	40.79	-0.59	54.0	13.21	AV	75.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_23.04.17

EUT Name: Tablet

Temp.(°C): 23.1

Model Number: Inventus SD1

Humidity (%RH): 54

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 ax160 CH207 P=15

Test Site: 966#2


Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08

ANT8

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

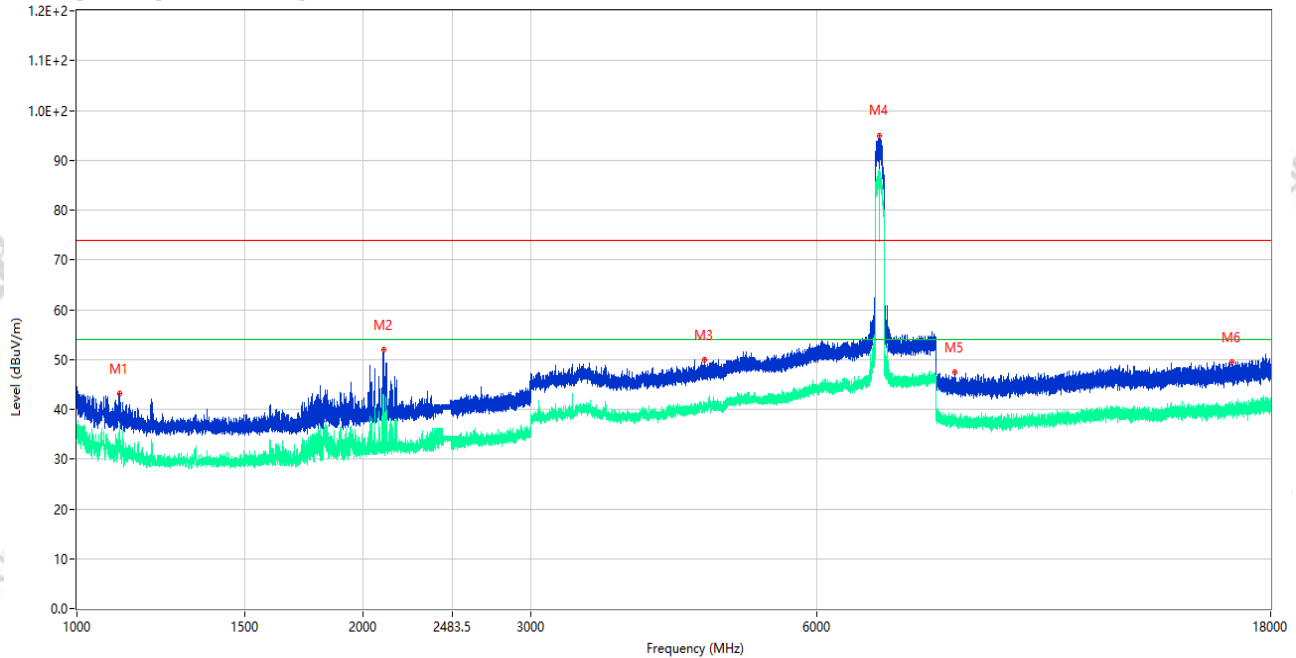

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1107.900	43.08	-15.76	74.0	30.92	Peak	33.00	150	Vertical	Pass
1**	1107.900	34.86	-15.76	54.0	19.14	AV	33.00	150	Vertical	Pass
2	2104.700	52.04	-13.55	74.0	21.96	Peak	210.00	150	Vertical	Pass
2**	2104.700	42.17	-13.55	54.0	11.83	AV	210.00	150	Vertical	Pass
3	4572.500	49.98	-3.31	74.0	24.02	Peak	196.00	150	Vertical	Pass
3**	4572.500	40.31	-3.31	54.0	13.69	AV	196.00	150	Vertical	Pass
4	6980.750	95.03	0.27	74.0	-21.03	Peak	262.00	150	Vertical	N/A
4**	6980.750	86.46	0.27	54.0	-32.46	AV	262.00	150	Vertical	N/A
5	8375.487	47.45	-4.46	74.0	26.55	Peak	6.00	150	Vertical	Pass
5**	8375.487	38.03	-4.46	54.0	15.97	AV	6.00	150	Vertical	Pass
6	16369.087	49.53	-1.69	74.0	24.47	Peak	107.00	150	Vertical	Pass
6**	16369.087	39.89	-1.69	54.0	14.11	AV	107.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-20_23.08.25

EUT Name: Tablet

Temp.(°C): 23.1

Model Number: Inventus SD1

Humidity (%RH): 54

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 ax160 CH207 P=15


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

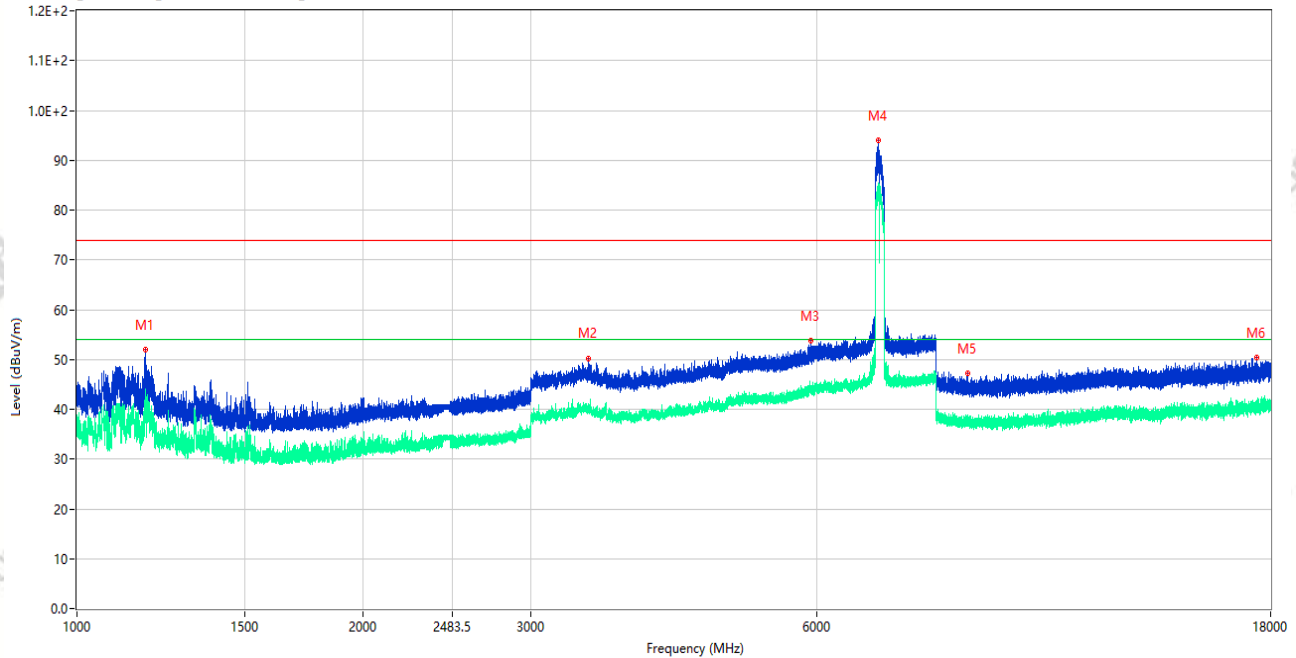

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1180.000	51.92	-15.78	74.0	22.08	Peak	262.00	150	Horizontal	Pass
1**	1180.000	41.10	-15.78	54.0	12.90	AV	262.00	150	Horizontal	Pass
2	3450.500	50.27	-4.98	74.0	23.73	Peak	347.00	150	Horizontal	Pass
2**	3450.500	39.55	-4.98	54.0	14.45	AV	347.00	150	Horizontal	Pass
3	5909.500	53.77	-0.33	74.0	20.23	Peak	44.00	150	Horizontal	Pass
3**	5909.500	43.96	-0.33	54.0	10.04	AV	44.00	150	Horizontal	Pass
4	6962.500	94.05	-0.32	74.0	-20.05	Peak	94.00	150	Horizontal	N/A
4**	6962.500	82.57	-0.32	54.0	-28.57	AV	94.00	150	Horizontal	N/A
5	8647.425	47.14	-5.67	74.0	26.86	Peak	335.00	150	Horizontal	Pass
5**	8647.425	36.80	-5.67	54.0	17.20	AV	335.00	150	Horizontal	Pass
6	17415.412	50.30	0.15	74.0	23.70	Peak	346.00	150	Horizontal	Pass
6**	17415.412	40.42	0.15	54.0	13.58	AV	346.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_15.30.23

EUT Name:	Tablet	Temp.(°C):	23.4
Model Number:	Inventus SD1	Humidity (%RH):	49
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII8 be20 CH213 P=7
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT8

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

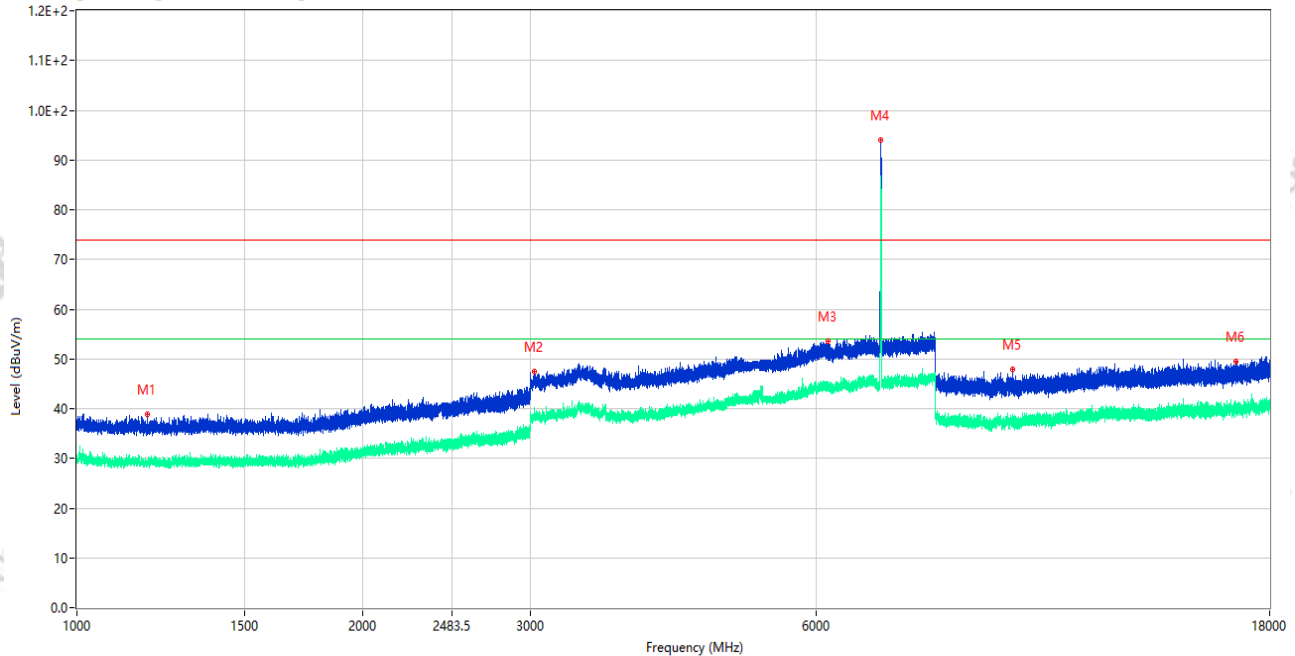

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1185.800	38.94	-15.88	74.0	35.06	Peak	146.00	150	Vertical	Pass
1**	1185.800	28.97	-15.88	54.0	25.03	AV	146.00	150	Vertical	Pass
2	3027.000	47.45	-7.56	74.0	26.55	Peak	117.00	150	Vertical	Pass
2**	3027.000	38.93	-7.56	54.0	15.07	AV	117.00	150	Vertical	Pass
3	6171.000	53.66	-0.42	74.0	20.34	Peak	14.00	150	Vertical	Pass
3**	6171.000	45.34	-0.42	54.0	8.66	AV	14.00	150	Vertical	Pass
4	7016.500	94.04	0.59	74.0	-20.04	Peak	285.00	150	Vertical	N/A
4**	7016.500	86.68	0.59	54.0	-32.68	AV	285.00	150	Vertical	N/A
5	9662.262	47.85	-3.15	74.0	26.15	Peak	2.00	150	Vertical	Pass
5**	9662.262	37.70	-3.15	54.0	16.30	AV	2.00	150	Vertical	Pass
6	16576.463	49.47	-0.73	74.0	24.53	Peak	254.00	150	Vertical	Pass
6**	16576.463	40.83	-0.73	54.0	13.17	AV	254.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_15.34.47

EUT Name: Tablet

Temp.(°C): 23.4

Model Number: Inventus SD1

Humidity (%RH): 49

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 be20 CH213 P=7


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

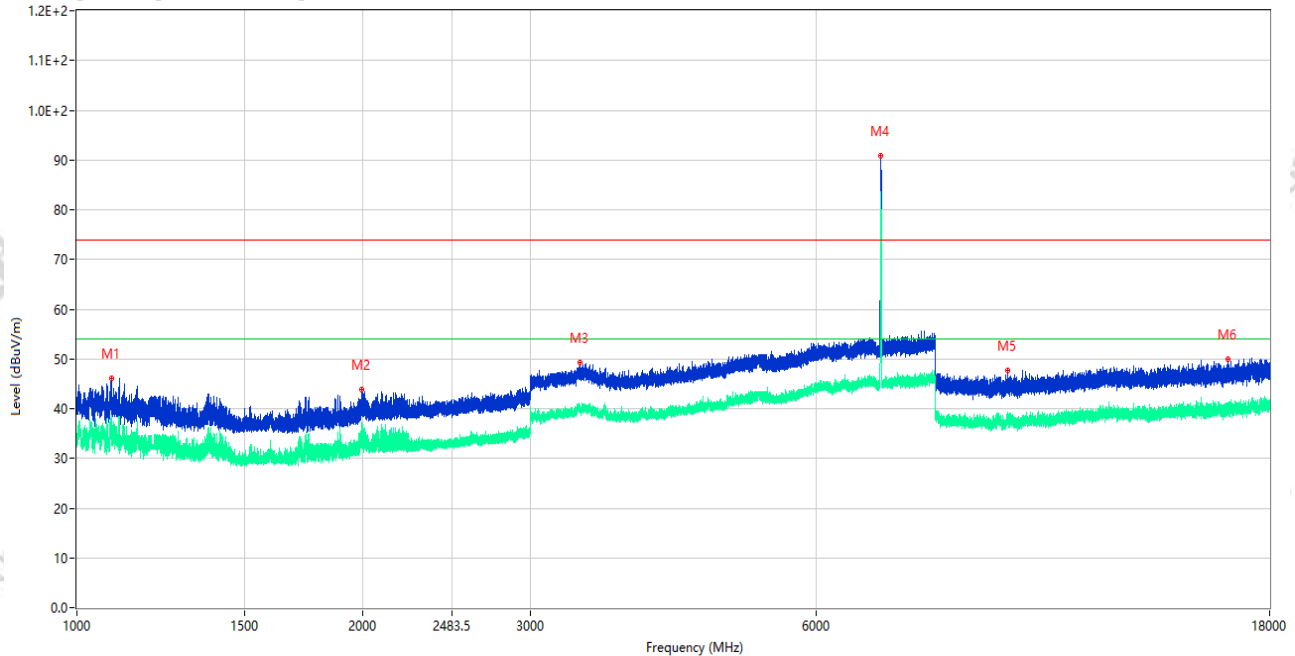

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1086.900	46.10	-15.78	74.0	27.90	Peak	154.00	150	Horizontal	Pass
1**	1086.900	37.59	-15.78	54.0	16.41	AV	154.00	150	Horizontal	Pass
2	1994.000	43.74	-14.60	74.0	30.26	Peak	175.00	150	Horizontal	Pass
2**	1994.000	36.10	-14.60	54.0	17.90	AV	175.00	150	Horizontal	Pass
3	3382.500	49.28	-5.25	74.0	24.72	Peak	14.00	150	Horizontal	Pass
3**	3382.500	39.66	-5.25	54.0	14.34	AV	14.00	150	Horizontal	Pass
4	7017.250	90.76	0.55	74.0	-16.76	Peak	117.00	150	Horizontal	N/A
4**	7017.250	83.36	0.55	54.0	-29.36	AV	117.00	150	Horizontal	N/A
5	9539.237	47.67	-3.04	74.0	26.33	Peak	285.00	150	Horizontal	Pass
5**	9539.237	37.56	-3.04	54.0	16.44	AV	285.00	150	Horizontal	Pass
6	16252.013	49.94	-1.47	74.0	24.06	Peak	359.00	150	Horizontal	Pass
6**	16252.013	38.95	-1.47	54.0	15.05	AV	359.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_15.47.31

EUT Name:	Tablet	Temp.(°C):	23.4
Model Number:	Inventus SD1	Humidity (%RH):	49
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII8 be40 CH211 P=8.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT8

RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

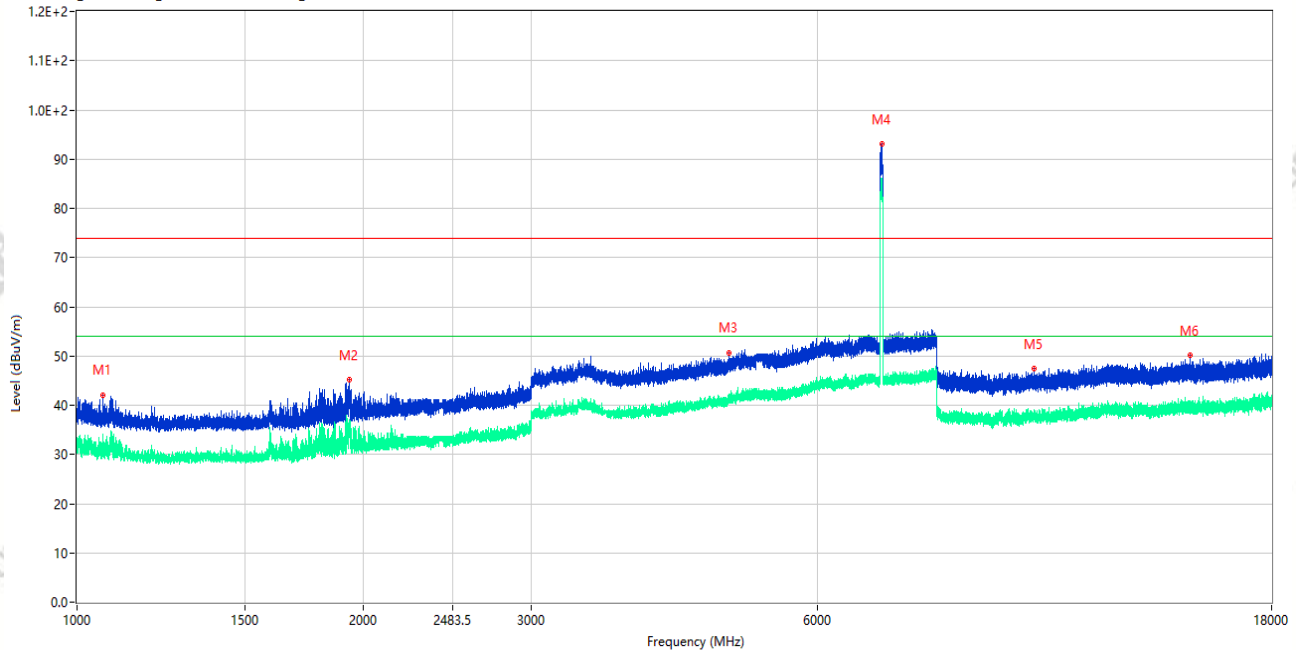

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1064.400	42.12	-15.20	74.0	31.88	Peak	252.00	150	Vertical	Pass
1**	1064.400	30.81	-15.20	54.0	23.19	AV	252.00	150	Vertical	Pass
2	1932.900	45.18	-15.31	74.0	28.82	Peak	125.00	150	Vertical	Pass
2**	1932.900	36.10	-15.31	54.0	17.90	AV	125.00	150	Vertical	Pass
3	4844.750	50.57	-1.87	74.0	23.43	Peak	359.00	150	Vertical	Pass
3**	4844.750	41.62	-1.87	54.0	12.38	AV	359.00	150	Vertical	Pass
4	7007.000	93.17	0.36	74.0	-19.17	Peak	280.00	150	Vertical	N/A
4**	7007.000	85.58	0.36	54.0	-31.58	AV	280.00	150	Vertical	N/A
5	10129.188	47.39	-3.93	74.0	26.61	Peak	332.00	150	Vertical	Pass
5**	10129.188	37.41	-3.93	54.0	16.59	AV	332.00	150	Vertical	Pass
6	14782.276	50.15	-0.94	74.0	23.85	Peak	150.00	150	Vertical	Pass
6**	14782.276	39.26	-0.94	54.0	14.74	AV	150.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_15.43.02

EUT Name: Tablet

Temp.(°C): 23.4

Model Number: Inventus SD1

Humidity (%RH): 49

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 be40 CH211 P=8.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

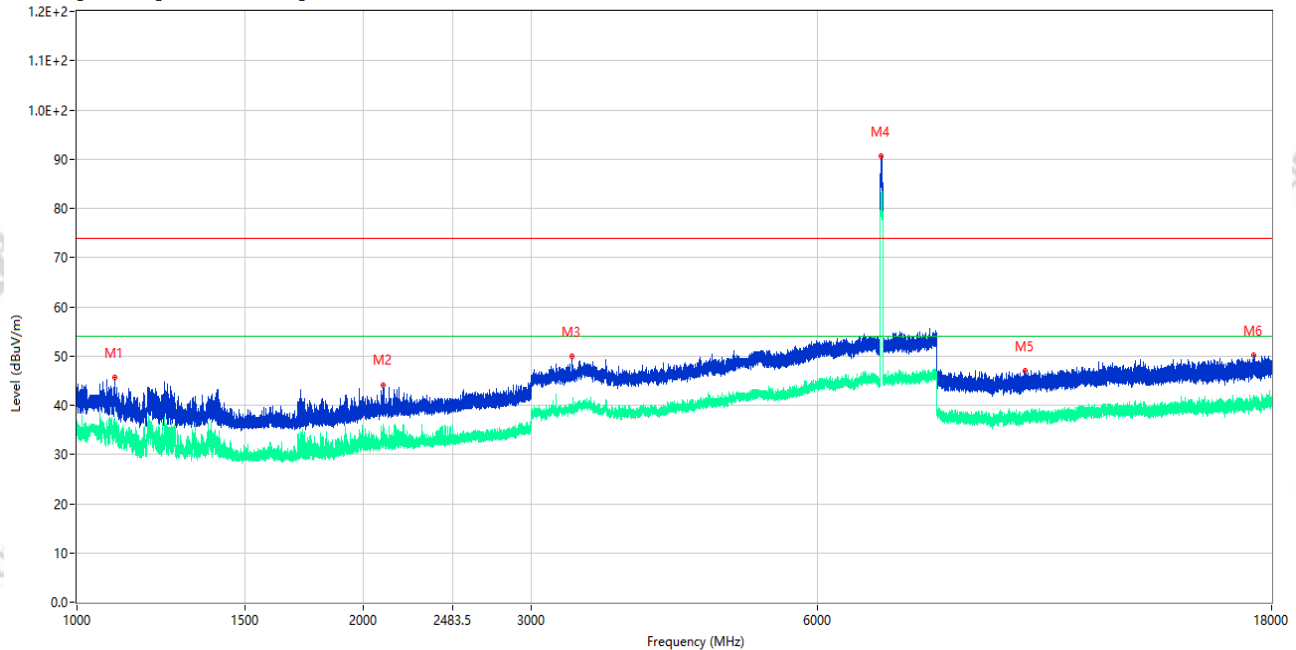

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1096.200	45.70	-15.78	74.0	28.30	Peak	71.00	150	Horizontal	Pass
1**	1096.200	35.62	-15.78	54.0	18.38	AV	71.00	150	Horizontal	Pass
2	2099.400	44.16	-13.53	74.0	29.84	Peak	149.00	150	Horizontal	Pass
2**	2099.400	32.69	-13.53	54.0	21.31	AV	149.00	150	Horizontal	Pass
3	3311.750	49.84	-6.59	74.0	24.16	Peak	46.00	150	Horizontal	Pass
3**	3311.750	39.09	-6.59	54.0	14.91	AV	46.00	150	Horizontal	Pass
4	7004.250	90.69	0.23	74.0	-16.69	Peak	96.00	150	Horizontal	N/A
4**	7004.250	82.47	0.23	54.0	-28.47	AV	96.00	150	Horizontal	N/A
5	9915.437	46.99	-4.38	74.0	27.01	Peak	31.00	150	Horizontal	Pass
5**	9915.437	36.98	-4.38	54.0	17.02	AV	31.00	150	Horizontal	Pass
6	17246.364	50.14	-0.70	74.0	23.86	Peak	250.00	150	Horizontal	Pass
6**	17246.364	41.05	-0.70	54.0	12.95	AV	250.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_15.54.49

EUT Name: Tablet

Temp.(°C): 23.4

Model Number: Inventus SD1

Humidity (%RH): 49

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 be80 CH199 P=13


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

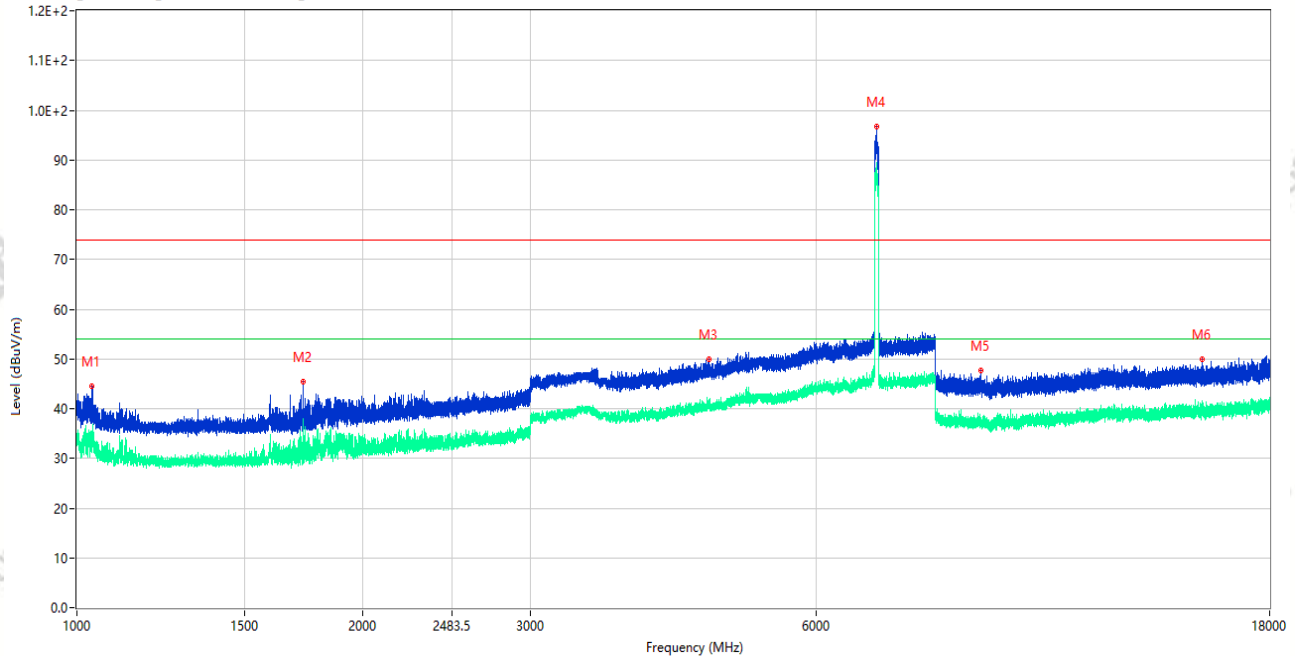

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1036.700	44.45	-15.36	74.0	29.55	Peak	309.00	150	Vertical	Pass
1**	1036.700	34.84	-15.36	54.0	19.16	AV	309.00	150	Vertical	Pass
2	1731.100	45.42	-16.20	74.0	28.58	Peak	274.00	150	Vertical	Pass
2**	1731.100	35.66	-16.20	54.0	18.34	AV	274.00	150	Vertical	Pass
3	4631.000	49.85	-2.68	74.0	24.15	Peak	249.00	150	Vertical	Pass
3**	4631.000	40.94	-2.68	54.0	13.06	AV	249.00	150	Vertical	Pass
4	6942.250	96.61	-0.11	74.0	-22.61	Peak	283.00	150	Vertical	N/A
4**	6942.250	87.80	-0.11	54.0	-33.80	AV	283.00	150	Vertical	N/A
5	8937.175	47.61	-4.31	74.0	26.39	Peak	308.00	150	Vertical	Pass
5**	8937.175	37.67	-4.31	54.0	16.33	AV	308.00	150	Vertical	Pass
6	15270.525	50.01	-1.28	74.0	23.99	Peak	0.00	150	Vertical	Pass
6**	15270.525	39.78	-1.28	54.0	14.22	AV	0.00	150	Vertical	Pass


Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_16.03.20

EUT Name:	Tablet	Temp.(°C):	23.4
Model Number:	Inventus SD1	Humidity (%RH):	49
Sample Number:	CC26060330-001-S07	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G UNII8 be80 CH199 P=13
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A01+数据线: A08 ANT8

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

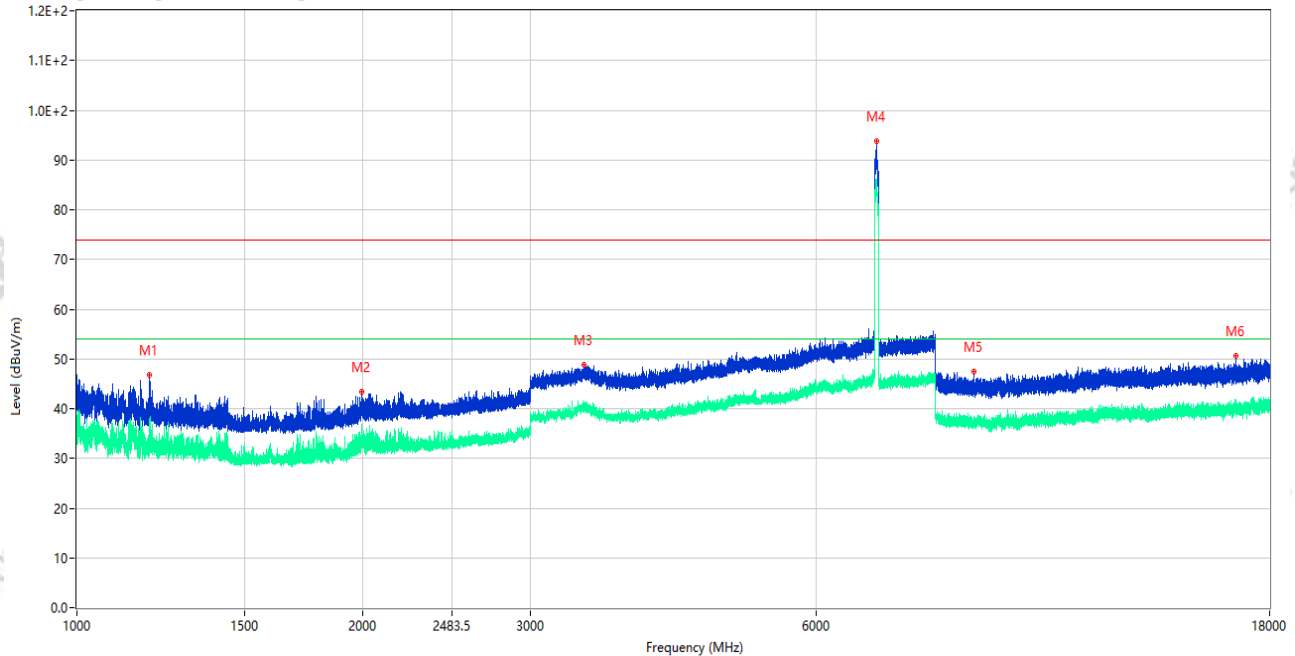

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1192.400	46.78	-15.81	74.0	27.22	Peak	225.00	150	Horizontal	Pass
1**	1192.400	36.29	-15.81	54.0	17.71	AV	225.00	150	Horizontal	Pass
2	1995.700	43.30	-14.52	74.0	30.70	Peak	41.00	150	Horizontal	Pass
2**	1995.700	33.67	-14.52	54.0	20.33	AV	41.00	150	Horizontal	Pass
3	3416.250	48.81	-5.14	74.0	25.19	Peak	133.00	150	Horizontal	Pass
3**	3416.250	41.10	-5.14	54.0	12.90	AV	133.00	150	Horizontal	Pass
4	6943.500	93.83	-0.03	74.0	-19.83	Peak	100.00	150	Horizontal	N/A
4**	6943.500	84.25	-0.03	54.0	-30.25	AV	100.00	150	Horizontal	N/A
5	8799.425	47.37	-5.01	74.0	26.63	Peak	239.00	150	Horizontal	Pass
5**	8799.425	37.85	-5.01	54.0	16.15	AV	239.00	150	Horizontal	Pass
6	16577.511	50.58	-0.75	74.0	23.42	Peak	15.00	150	Horizontal	Pass
6**	16577.511	40.40	-0.75	54.0	13.60	AV	15.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_16.16.16

EUT Name: Tablet

Temp.(°C): 23.4

Model Number: Inventus SD1

Humidity (%RH): 49

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 be160 CH207 P=15


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

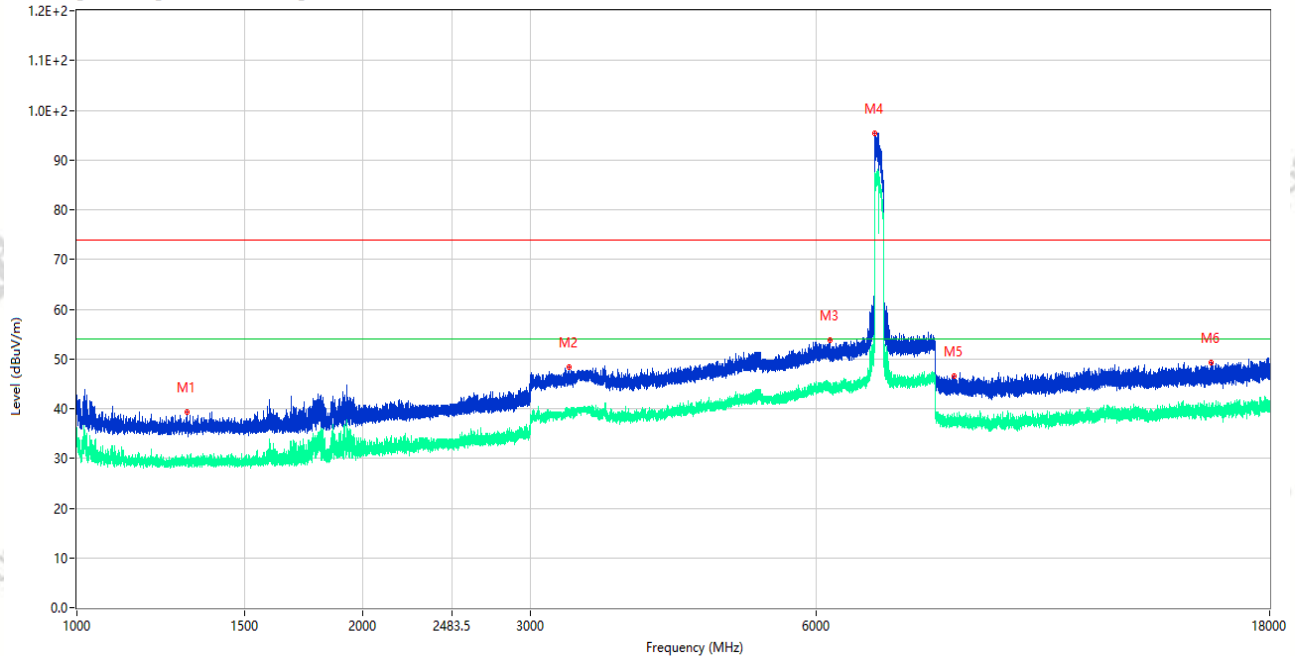

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1305.400	39.38	-15.60	74.0	34.62	Peak	360.00	150	Vertical	Pass
1**	1305.400	28.72	-15.60	54.0	25.28	AV	360.00	150	Vertical	Pass
2	3299.000	48.47	-6.88	74.0	25.53	Peak	317.00	150	Vertical	Pass
2**	3299.000	39.94	-6.88	54.0	14.06	AV	317.00	150	Vertical	Pass
3	6197.750	53.70	-0.73	74.0	20.30	Peak	3.00	150	Vertical	Pass
3**	6197.750	44.19	-0.73	54.0	9.81	AV	3.00	150	Vertical	Pass
4	6910.500	95.44	0.13	74.0	-21.44	Peak	282.00	150	Vertical	N/A
4**	6910.500	84.49	0.13	54.0	-30.49	AV	282.00	150	Vertical	N/A
5	8384.513	46.56	-4.82	74.0	27.44	Peak	360.00	150	Vertical	Pass
5**	8384.513	37.30	-4.82	54.0	16.70	AV	360.00	150	Vertical	Pass
6	15622.275	49.33	-1.75	74.0	24.67	Peak	82.00	150	Vertical	Pass
6**	15622.275	38.98	-1.75	54.0	15.02	AV	82.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_16.10.26

EUT Name: Tablet

Temp.(°C): 23.4

Model Number: Inventus SD1

Humidity (%RH): 49

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 be160 CH207 P=15


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

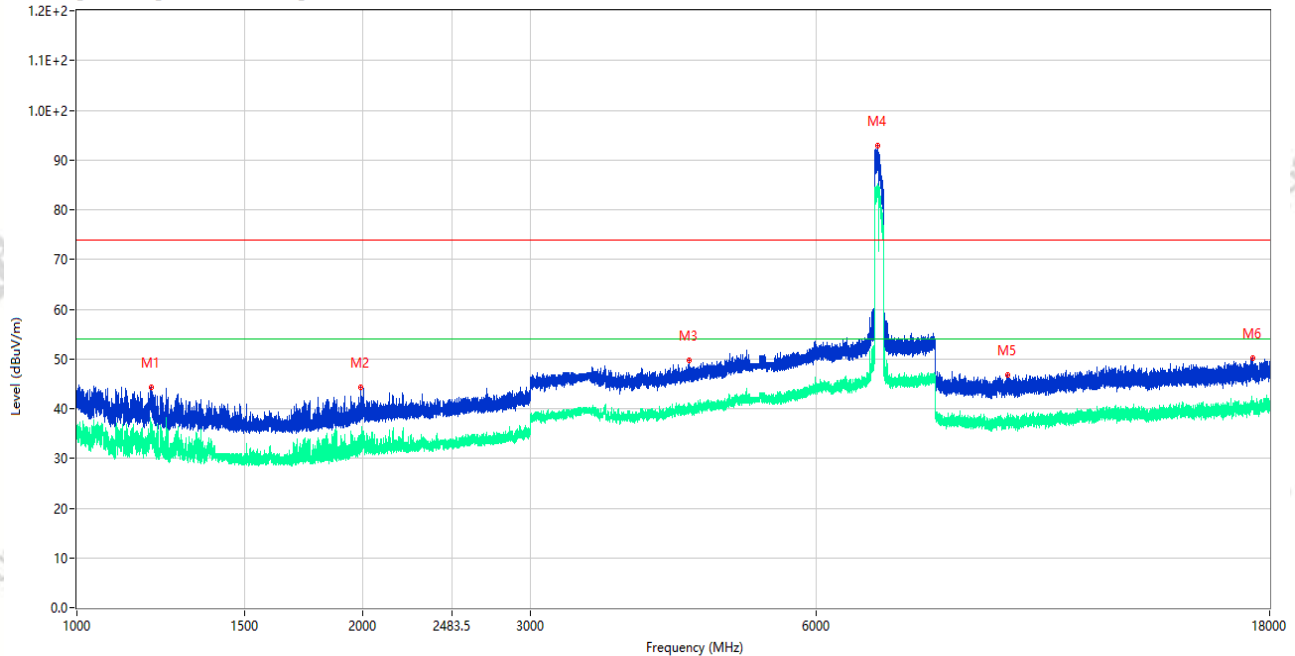

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1198.000	44.36	-15.73	74.0	29.64	Peak	225.00	150	Horizontal	Pass
1**	1198.000	37.19	-15.73	54.0	16.81	AV	225.00	150	Horizontal	Pass
2	1991.200	44.36	-14.71	74.0	29.64	Peak	121.00	150	Horizontal	Pass
2**	1991.200	33.87	-14.71	54.0	20.13	AV	121.00	150	Horizontal	Pass
3	4412.000	49.63	-2.88	74.0	24.37	Peak	359.00	150	Horizontal	Pass
3**	4412.000	39.74	-2.88	54.0	14.26	AV	359.00	150	Horizontal	Pass
4	6957.000	92.80	-0.26	74.0	-18.80	Peak	98.00	150	Horizontal	N/A
4**	6957.000	82.95	-0.26	54.0	-28.95	AV	98.00	150	Horizontal	N/A
5	9539.951	46.81	-3.03	74.0	27.19	Peak	333.00	150	Horizontal	Pass
5**	9539.951	37.67	-3.03	54.0	16.33	AV	333.00	150	Horizontal	Pass
6	17277.338	50.09	-0.96	74.0	23.91	Peak	185.00	150	Horizontal	Pass
6**	17277.338	40.89	-0.96	54.0	13.11	AV	185.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_16.31.26

EUT Name: Tablet

Temp.(°C): 23.4

Model Number: Inventus SD1

Humidity (%RH): 49

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 be320 CH191 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

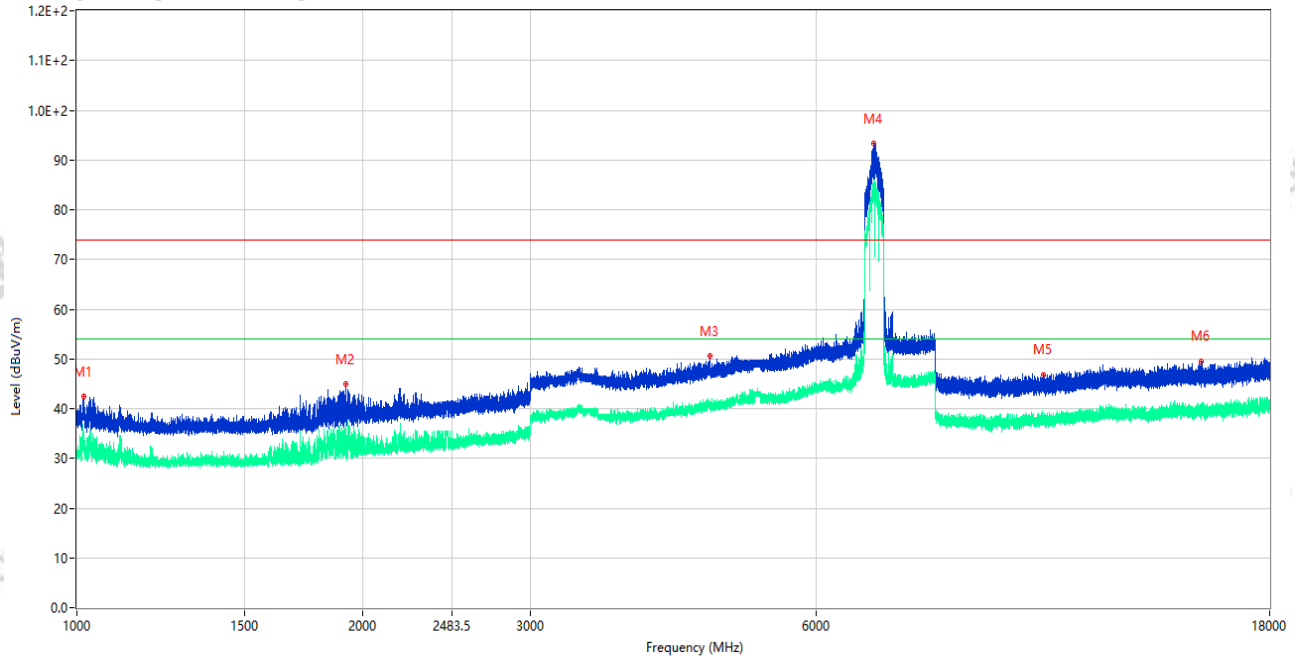

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1016.200	42.43	-14.76	74.0	31.57	Peak	259.00	150	Vertical	Pass
1**	1016.200	34.78	-14.76	54.0	19.22	AV	259.00	150	Vertical	Pass
2	1917.400	44.95	-15.50	74.0	29.05	Peak	124.00	150	Vertical	Pass
2**	1917.400	33.32	-15.50	54.0	20.68	AV	124.00	150	Vertical	Pass
3	4634.500	50.60	-2.89	74.0	23.40	Peak	250.00	150	Vertical	Pass
3**	4634.500	41.46	-2.89	54.0	12.54	AV	250.00	150	Vertical	Pass
4	6900.000	93.27	0.64	74.0	-19.27	Peak	283.00	150	Vertical	N/A
4**	6900.000	84.76	0.64	54.0	-30.76	AV	283.00	150	Vertical	N/A
5	10393.525	46.88	-3.50	74.0	27.12	Peak	353.00	150	Vertical	Pass
5**	10393.525	37.16	-3.50	54.0	16.84	AV	353.00	150	Vertical	Pass
6	15257.662	49.58	-1.08	74.0	24.42	Peak	117.00	150	Vertical	Pass
6**	15257.662	39.80	-1.08	54.0	14.20	AV	117.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060547

Test Time: 2026-07-21_16.35.34

EUT Name: Tablet

Temp.(°C): 23.4

Model Number: Inventus SD1

Humidity (%RH): 49

Sample Number: CC26060330-001-S07

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G UNII8 be320 CH191 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A01+数据线: A08
ANT8

RE Test case FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

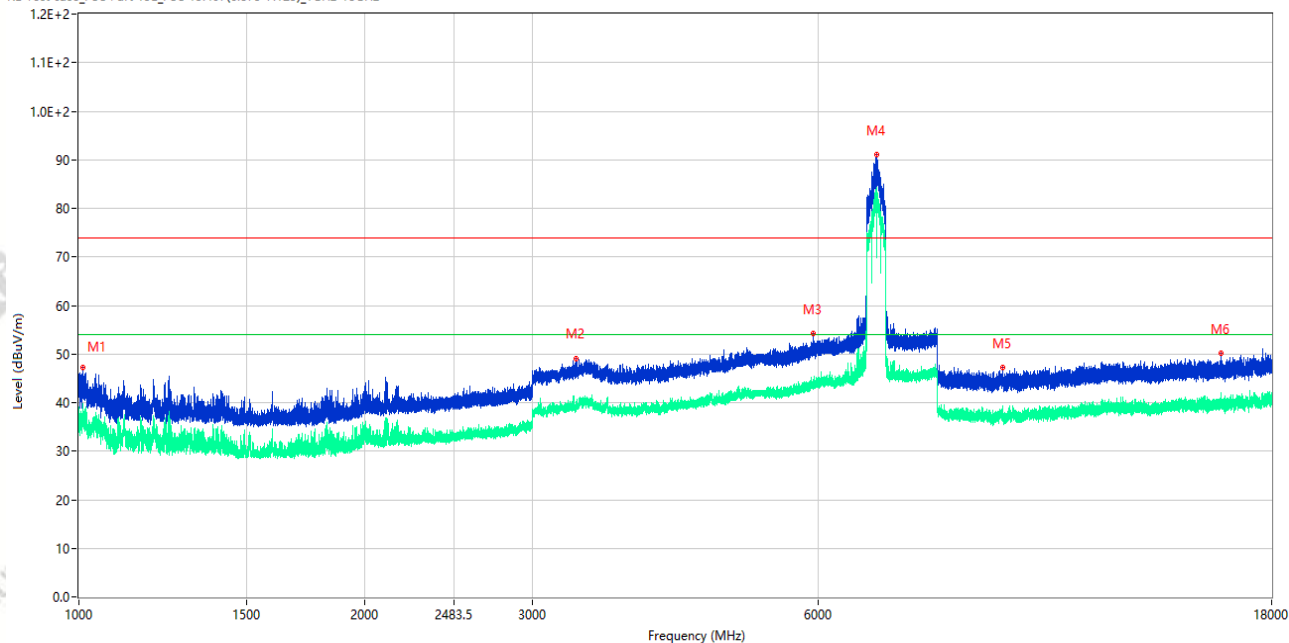

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1008.600	47.24	-14.23	74.0	26.76	Peak	210.00	150	Horizontal	Pass
1**	1008.600	37.80	-14.23	54.0	16.20	AV	210.00	150	Horizontal	Pass
2	3332.000	49.00	-6.41	74.0	25.00	Peak	151.00	150	Horizontal	Pass
2**	3332.000	38.55	-6.41	54.0	15.45	AV	151.00	150	Horizontal	Pass
3	5921.500	54.17	-0.38	74.0	19.83	Peak	184.00	150	Horizontal	Pass
3**	5921.500	43.07	-0.38	54.0	10.93	AV	184.00	150	Horizontal	Pass
4	6913.750	90.97	0.18	74.0	-16.97	Peak	101.00	150	Horizontal	N/A
4**	6913.750	82.15	0.18	54.0	-28.15	AV	101.00	150	Horizontal	N/A
5	9376.787	47.13	-4.71	74.0	26.87	Peak	166.00	150	Horizontal	Pass
5**	9376.787	37.15	-4.71	54.0	16.85	AV	166.00	150	Horizontal	Pass
6	15916.276	50.18	-2.33	74.0	23.82	Peak	48.00	150	Horizontal	Pass
6**	15916.276	39.18	-2.33	54.0	14.82	AV	48.00	150	Horizontal	Pass