FCC RF Test Report

APPLICANT	:	FCNT LLC.
EQUIPMENT	:	Mobile cellular phone
BRAND NAME	:	Raku-Raku smartphone a
MODEL NAME	:	A401FC
FCC ID	:	2BEPUFMP198
STANDARD	:	47 CFR Part 2, Part 27 Subpart Q
CLASSIFICATION	:	PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S)	:	Apr. 24, 2024 ~ Jun. 03, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia

ACCREDITED
Cert #5145.02

Sporton International Inc. (Kunshan)
No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China

TABLE OF CONTENTS

REVISION HISTORY **3**
SUMMARY OF TEST RESULT **4**
1 GENERAL DESCRIPTION **5**
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 5
1.5 Modification of EUT 5
1.6 Maximum EIRP Power and Emission Designator 6
1.7 Testing Site 6
1.8 Test Software 7
1.9 Applied Standards 7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST **8**
2.1 Test Mode 8
2.2 Connection Diagram of Test System 9
2.3 Support Unit used in test configuration and system 9
2.4 Measurement Results Explanation Example 9
2.5 Frequency List of Low/Middle/High Channels 10
3 CONDUCTED TEST ITEMS **11**
3.1 Measuring Instruments 11
3.2 Test Setup 11
3.3 Test Result of Conducted Test 11
3.4 Conducted Output Power Measurement 12
3.5 Peak-to-Average Ratio 13
3.6 EIRP 14
3.7 Occupied Bandwidth 15
3.8 Conducted Band Edge Measurement 16
3.9 Conducted Spurious Emission Measurement 17
3.10 Frequency Stability Measurement 18
4 RADIATED TEST ITEMS **19**
4.1 Measuring Instruments 19
4.2 Test Setup 19
4.3 Test Result of Radiated Test 20
4.4 Radiated Spurious Emission Measurement 21
5 LIST OF MEASURING EQUIPMENT **22**
6 MEASUREMENT UNCERTAINTY **23**
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG422914C	Rev. 01	Initial issue of report	Jul. 18, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
3.5	§27.50 (k)(4)	Peak-to-Average Ratio	<13dB	PASS	
3.6	§27.50 (k)(3)	EIRP	EIRP < 1W (30dBm)	PASS	-
3.7	§2.1049	Occupied Bandwidth	—	Report Only	-
3.8	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement	-13dBm/MHz	PASS	-
3.9	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission	-13dBm/MHz	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission	-13dBm/MHz	PASS	Under limit 39.60 dB at 13964.00 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section “Measurement Uncertainty”

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

FCNT LLC.
Sanki Yamato Bldg. 3F, 7-10-1, Chuorinkan, Yamato-shi, Kanagawa, 242-0007, Japan

1.2 Manufacturer

FCNT LLC.
Sanki Yamato Bldg. 3F, 7-10-1, Chuorinkan, Yamato-shi, Kanagawa, 242-0007, Japan

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile cellular phone
Brand Name	Raku-Raku smartphone a
Model Name	A401FC
FCC ID	2BEPUFMP198
IMEI Code	Conducted : 354401310043544/354401310043554 Radiation : 354401310039765/354401310039773
HW Version	V4
SW Version	FAC V006
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Product Feature	
Tx/Rx Frequency	LTE Band 42: 3450 MHz ~ 3550 MHz
Bandwidth	5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 42 : 14.88 dBm
Antenna Gain	LTE Band 42 : -1.8 dBi
Type of Modulation	QPSK / 16QAM / 64QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP Power and Emission Designator

LTE Band 42		QPSK		16QAM/64QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	3452.5 ~ 3547.5	0.0200	4M50G7D	0.0192	4M48W7D
10	3455 ~ 3545	0.0202	9M05G7D	0.0194	8M99W7D
15	3457.5 ~ 3542.5	0.0195	13M4G7D	0.0200	13M4W7D
20	3460 ~ 3540	0.0203	17M9G7D	0.0197	18M0W7D

1.7 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	**Sporton Site No.**	**FCC Designation No.**	**FCC Test Firm Registration No.**
	TH01-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	**Sporton Site No.**	**FCC Designation No.**	**FCC Test Firm Registration No.**
	03CH04-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	SPORTON	FCC LTE_Ver2.0 Auto_china_210503	2.0
2.	03CH04-SZ	AUDIX	E3	6.2009-8-24

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, Part 27 Subpart Q
- ANSI C63.26-2015
- FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01
-

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (Z Plane)

Test Cases	Band	Bandwidth (MHz)	Modulation	RB #	Test Channel
		eg. 5M, 10M, 15M, 20M	eg. QPSK, 16QAM, 64QAM	1RB, Partial RB, Full RB	L/M/H
Max. Output Power	LTE Band 42	5M, 10M, 15M, 20M	QPSK, 16QAM, 64QAM	1RB, Partial RB, Full RB	L, M, H
Peak-to-Average Ratio	LTE Band 42	20M	QPSK, 16QAM, 64QAM	Full RB	M
E.I.R.P	LTE Band 42	5M, 10M, 15M, 20M	QPSK, 16QAM, 64QAM	1RB, Partial RB, Full RB	L, M, H
26dB and 99% Bandwidth	LTE Band 42	20M	QPSK, 16QAM	Full RB	M
Conducted Band Edge	LTE Band 42	5M, 10M, 15M, 20M	QPSK, 16QAM, 64QAM	1RB, Full RB	L, H
Conducted Spurious Emission	LTE Band 42	5M, 10M, 15M, 20M	QPSK	1RB	L, M, H
Frequency Stability	LTE Band 42	10M	QPSK	1RB	M
Radiated Spurious Emission	LTE Band 42	Worst case from maximum power			M

Note:
The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

2.2 Connection Diagram of Test System

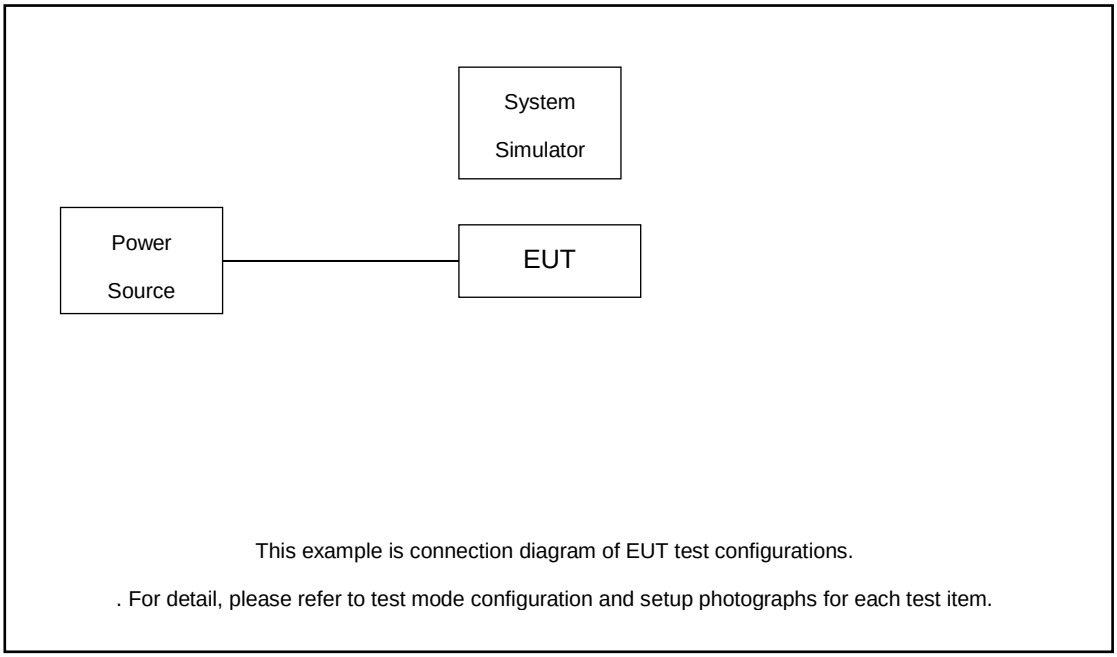

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	Adapter	Lenovo	N/A	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6.5 dB.

Example :

Offset(dB) = RF cable loss(dB)

= 6.5 (dB)

2.5 Frequency List of Low/Middle/High Channels

LTE Band 42 Channel and Frequency List				
BW [MHz]	**Channel/Frequency(MHz)**	**Lowest**	**Middle**	**Highest**
20	Channel	42190	42590	42990
	Frequency	3460	3500	3540
15	Channel	42165	42590	43015
	Frequency	3457.5	3500	3542.5
10	Channel	42140	42590	43040
	Frequency	3455	3500	3545
5	Channel	42115	42590	43065
	Frequency	3452.5	3500	3547.5

3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power

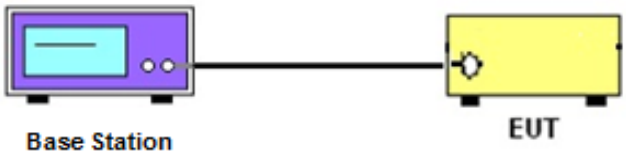

3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth ,Band-Edge and Conducted Spurious Emission

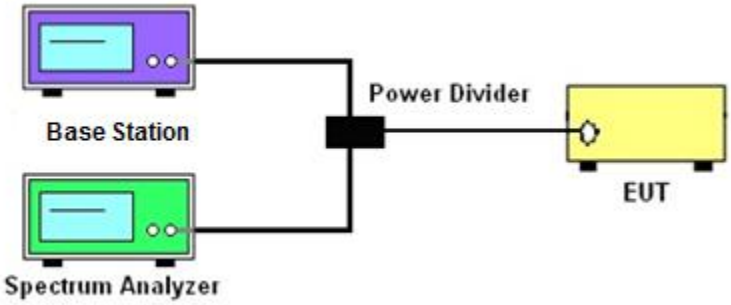

3.2.3 Frequency Stability

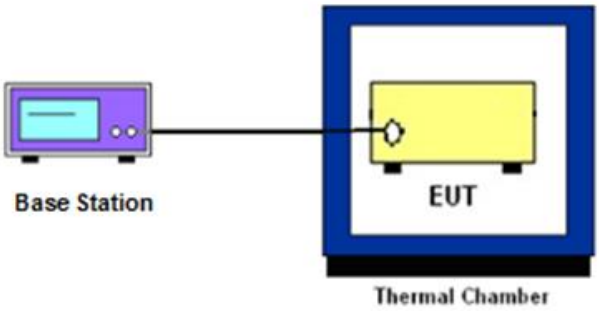

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 EIRP

3.6.1 Description of EIRP Limit

§ 27.50 (k)(3)

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications

3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2. EIRP = $P_T + G_T – L_C$, ERP = EIRP -2.15, where

   P_T = transmitter output power in dBm

   G_T = gain of the transmitting antenna in dBi

   L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.7 Occupied Bandwidth

3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
   (this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “–X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.8 Conducted Band Edge Measurement

3.8.1 Description of Conducted Band Edge Measurement

§ 27.53 (n)(2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed −13 dBm/MHz.

Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW ≥ 1% EBW but limited to a maximum of 200 kHz in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz and 5 MHz removed from the band edge, set RBW ≥ 500KHz.
6. Beyond the 5 MHz removed from the band edge, set RBW = 1MHz.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

3.9 Conducted Spurious Emission Measurement

3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges shall not exceed −13 dBm/MHz.

It is measured by means of a calibrated spectrum analyzer and scanned from 9 kHz up to a frequency including its 10th harmonic.

3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. Checked that all the results comply with the emission limit line.

3.10 Frequency Stability Measurement

3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

4 Radiated Test Items

4.1 Measuring Instruments

See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test below 30MHz

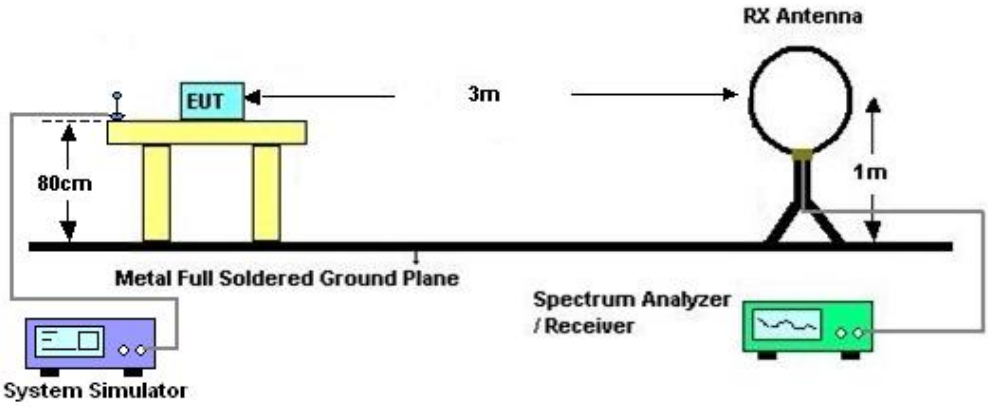

4.2.2 For radiated test from 30MHz to 1GHz

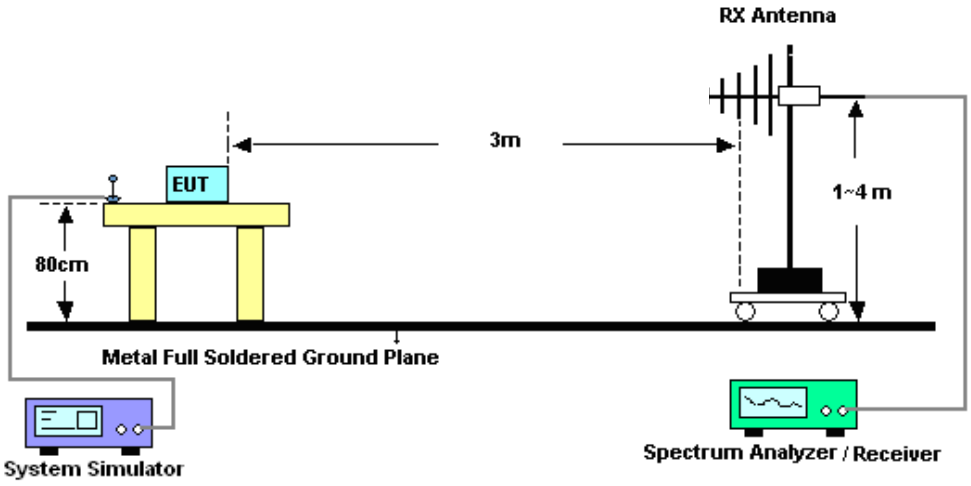

4.2.3 For radiated test above 1GHz

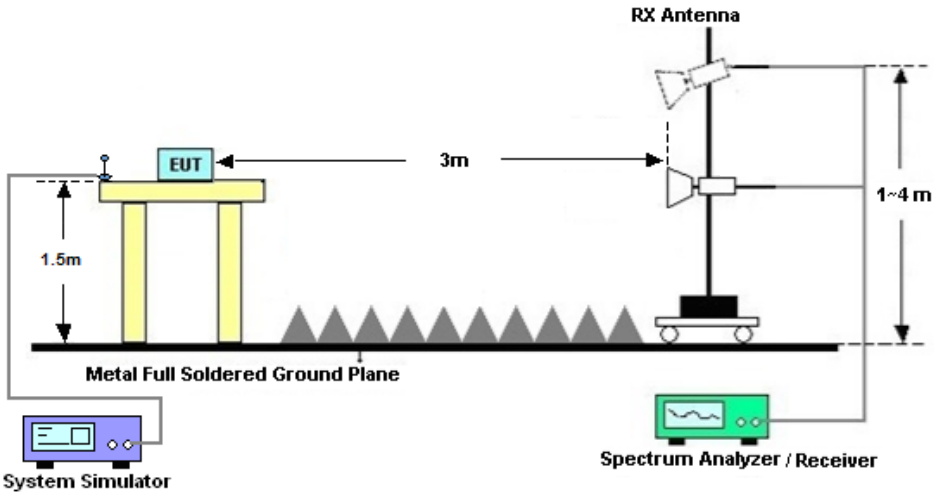

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission outside of the authorized operating frequency ranges shall not exceed −13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
   EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
   ERP (dBm) = EIRP - 2.15
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Apr. 24, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Apr. 24, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 06, 2023	Apr. 24, 2024	Jul. 05, 2024	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 18, 2023	May 31, 2024~ Jun. 03, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2023	May 31, 2024~ Jun. 03, 2024	Jul. 06, 2024	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 28, 2022	May 31, 2024~ Jun. 03, 2024	Jun. 27, 2024	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May 09, 2024	May 31, 2024~ Jun. 03, 2024	May 08, 2025	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Jul. 07, 2023	May 31, 2024~ Jun. 03, 2024	Jul. 06, 2024	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 08, 2023	May 31, 2024~ Jun. 03, 2024	Jul. 07, 2024	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 18, 2023	May 31, 2024~ Jun. 03, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1	1943528	1GHz~18GHz	Oct. 18, 2023	May 31, 2024~ Jun. 03, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 07, 2023	May 31, 2024~ Jun. 03, 2024	Jul. 06, 2024	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY57280136	500MHz~26.5GHz	Aug. 21, 2023	May 31, 2024~ Jun. 03, 2024	Aug. 20, 2024	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Oct. 18, 2023	May 31, 2024~ Jun. 03, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	May 31, 2024~ Jun. 03, 2024	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	May 31, 2024~ Jun. 03, 2024	NCR	Radiation (03CH04-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	**±2.26 dB**
Occupied Channel Bandwidth	**±0.1%**
Conducted Power	**±0.46 dB**
Peak to Average Ratio	**±0.46 dB**
Frequency Stability	**±0.4 Hz**

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**2.8 dB**

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**3.1 dB**

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**3.9 dB**

---------- THE END ----------

Appendix A. Test Results of Conducted Test

Test Engineer :	Smile Wang	Temperature :	22~23℃
		Relative Humidity :	40~42%

Conducted Output Power(Average power) and EIRP

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP(W)		
Channel				42190	42590	42990			
Frequency (MHz)				3460	3500	3540	L	M	H
20	QPSK	1	0	14.70	14.88	14.70	0.0195	0.0203	0.0195
20	QPSK	1	49	14.61	14.73	14.77	0.0191	0.0196	0.0198
20	QPSK	1	99	14.69	14.87	14.77	0.0195	0.0203	0.0198
20	QPSK	50	0	14.67	14.86	14.77	0.0194	0.0202	0.0198
20	QPSK	50	24	14.61	14.72	14.57	0.0191	0.0196	0.0189
20	QPSK	50	50	14.52	14.81	14.49	0.0187	0.0200	0.0186
20	QPSK	100	0	14.58	14.79	14.38	0.0190	0.0199	0.0181
20	16QAM	1	0	14.63	14.74	14.37	0.0192	0.0197	0.0181
20	64QAM	1	0	14.68	14.69	14.55	0.0194	0.0195	0.0188
Channel				42165	42590	43015	EIRP(W)		
Frequency (MHz)				3457.5	3500	3542.5	L	M	H
15	QPSK	1	0	14.62	14.67	14.69	0.0191	0.0194	0.0195
15	16QAM	1	0	14.52	14.74	14.80	0.0187	0.0197	0.0200
Channel				42140	42590	43040	EIRP(W)		
Frequency (MHz)				3455	3500	3545	L	M	H
10	QPSK	1	0	14.49	14.86	14.49	0.0186	0.0202	0.0186
10	16QAM	1	0	14.65	14.68	14.39	0.0193	0.0194	0.0182
Channel				42115	42590	43065	EIRP(W)		
Frequency (MHz)				3452.5	3500	3547.5	L	M	H
5	QPSK	1	0	14.60	14.82	14.59	0.0191	0.0200	0.0190
5	16QAM	1	0	14.64	14.62	14.37	0.0192	0.0191	0.0181

Peak-to-Average Ratio

Mode	LTE Band 42 / 20MHz			
Mod.	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Result
Middle CH	5.07	6.03	6.23	PASS

LTE Band 42/ 20MHz

Middle Channel / Full RB / QPSK

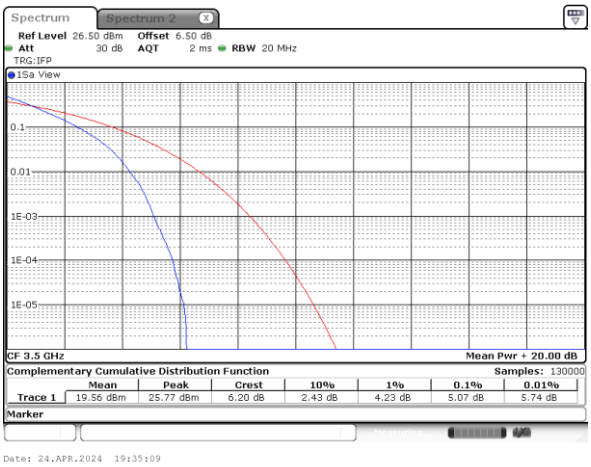

Middle Channel / Full RB / 16QAM

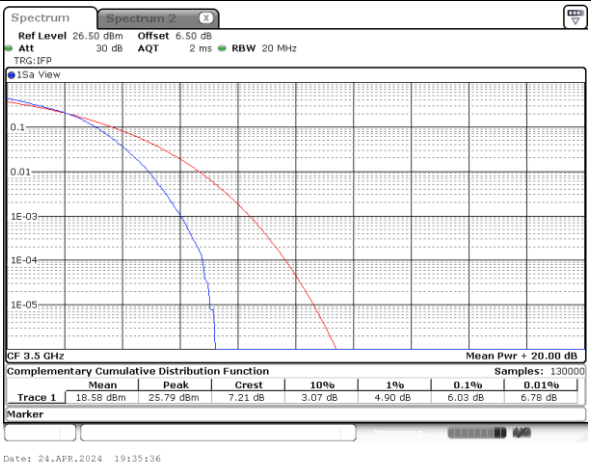

Middle Channel / Full RB / 64QAM

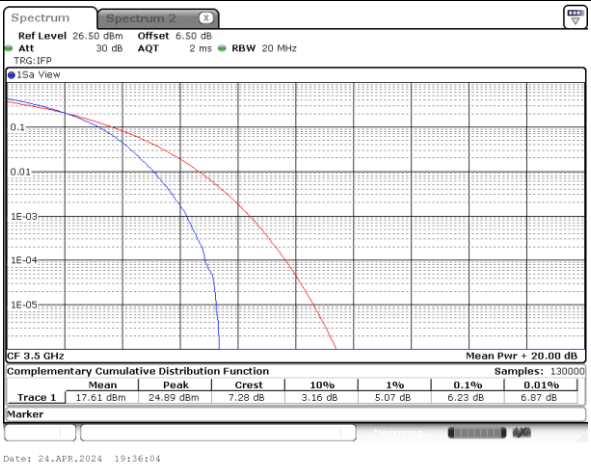

26dB Bandwidth

Mode	LTE Band 42 : 26dB BW(MHz)	
BW	5MHz	
Mod.	QPSK	16QAM
Middle CH	4.85	4.81
BW	10MHz	
Mod.	QPSK	16QAM
Middle CH	9.63	9.79
BW	15MHz	
Mod.	QPSK	16QAM
Middle CH	14.36	14.33
BW	20MHz	
Mod.	QPSK	16QAM
Middle CH	18.62	19.22

LTE Band 42	
Middle Channel / 5MHz / QPSK	Middle Channel / 5MHz / 16QAM
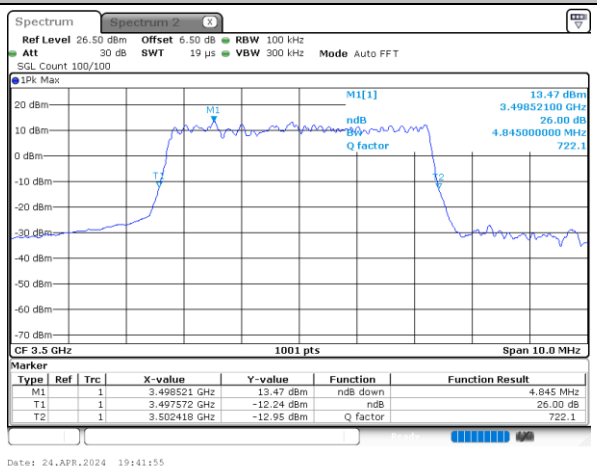	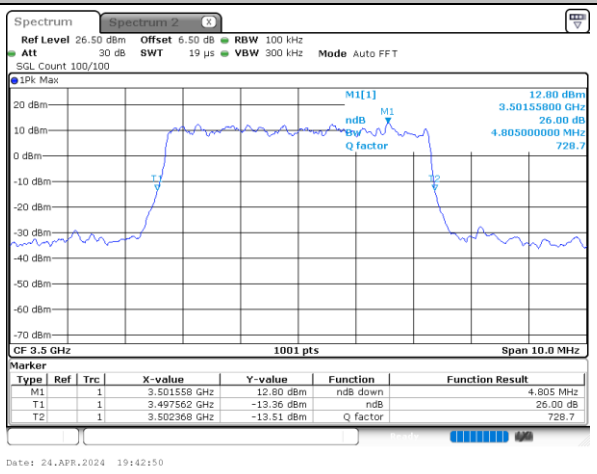

Middle Channel / 10MHz / QPSK

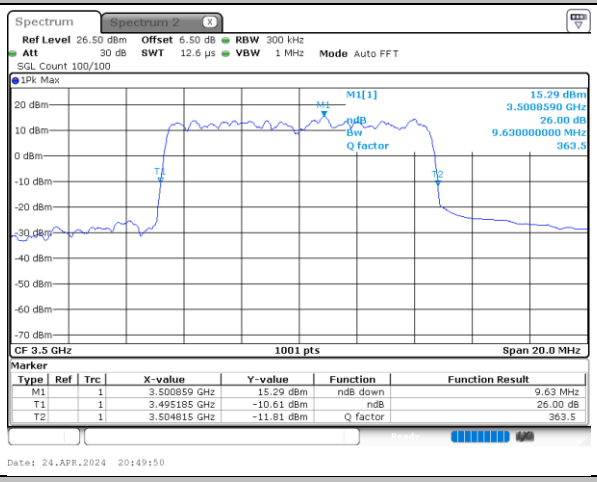

Middle Channel / 10MHz / 16QAM

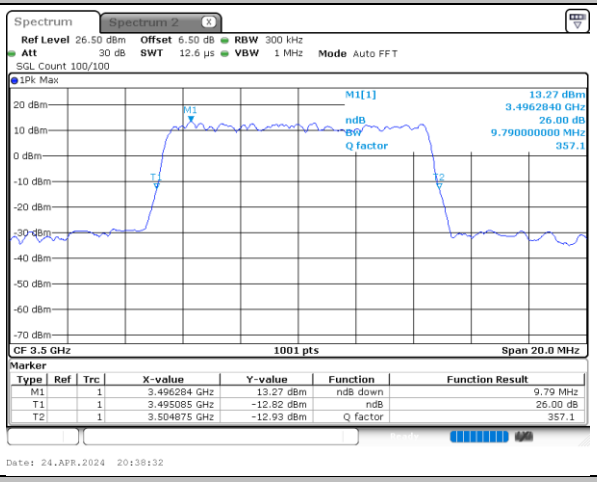

Middle Channel / 15MHz / QPSK

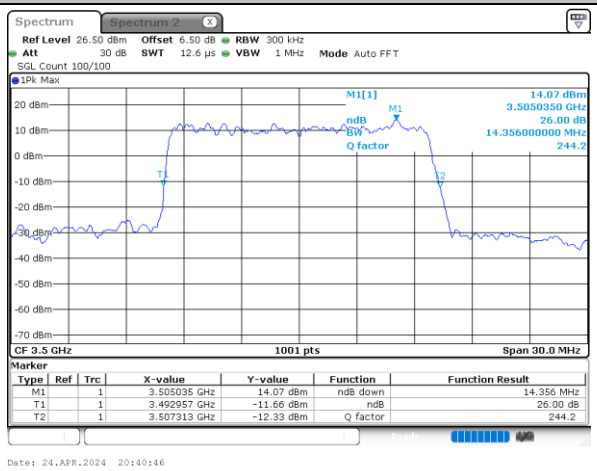

Middle Channel / 15MHz / 16QAM

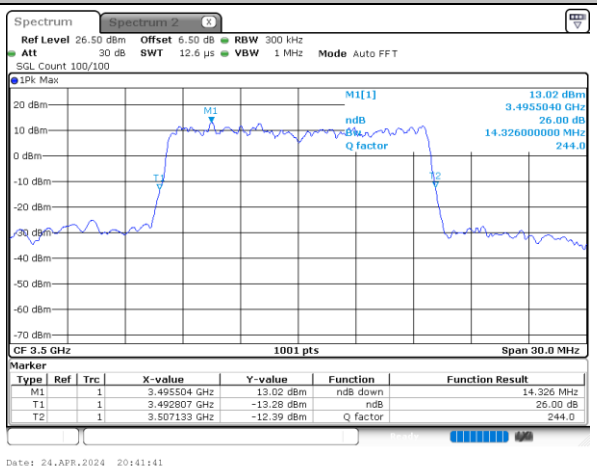

Middle Channel / 20MHz / QPSK

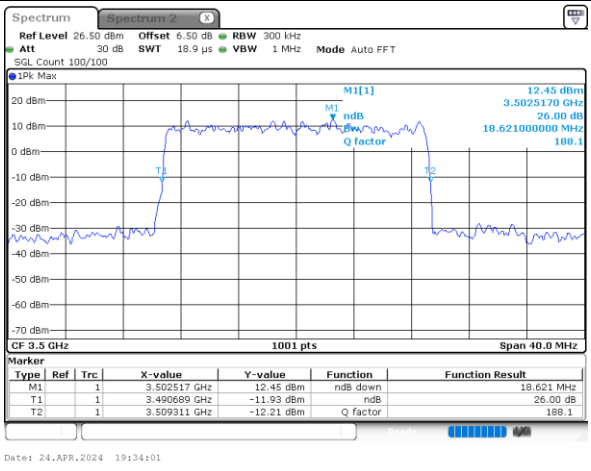

Middle Channel / 20MHz / 16QAM

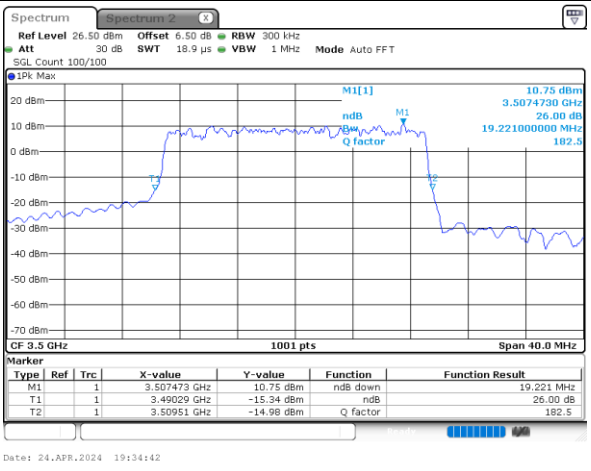

Occupied Bandwidth

Mode	LTE Band 42: 99%OBW(MHz)	
BW	5MHz	
Mod.	QPSK	16QAM
Middle CH	4.50	4.48
BW	10MHz	
Mod.	QPSK	16QAM
Middle CH	9.05	8.99
BW	15MHz	
Mod.	QPSK	16QAM
Middle CH	13.40	13.43
BW	20MHz	
Mod.	QPSK	16QAM
Middle CH	17.86	17.98

LTE Band 42	
Middle Channel / 5MHz / QPSK	Middle Channel / 5MHz / 16QAM

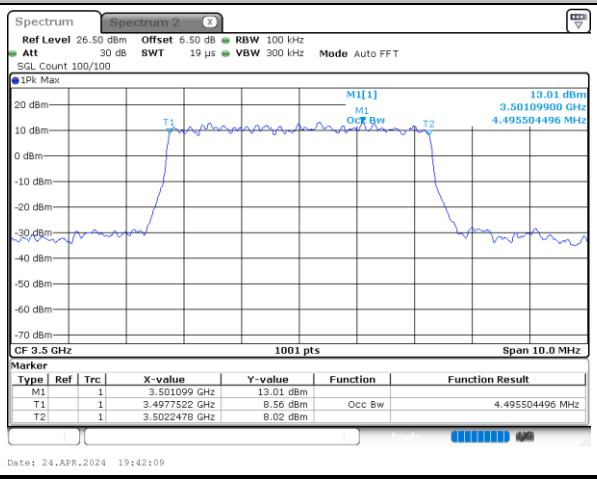

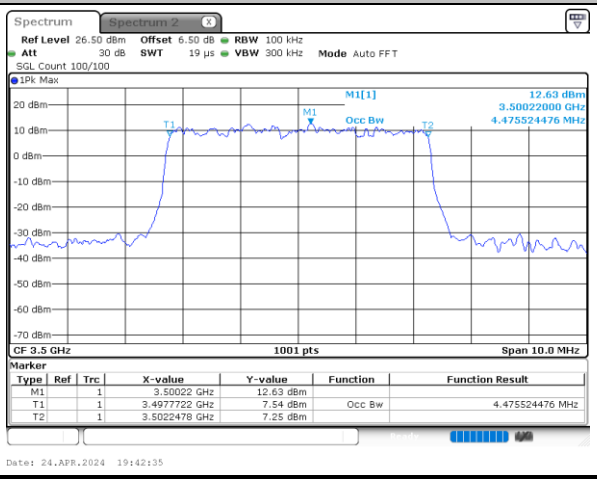

Middle Channel / 10MHz / QPSK

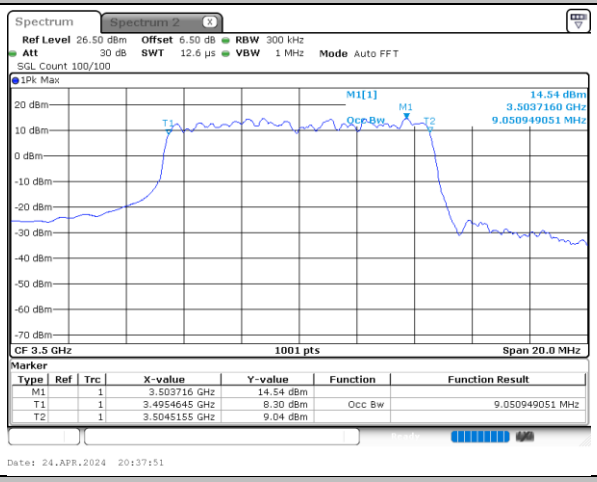

Date: 24.APR.2024 20:37:51

Middle Channel / 10MHz / 16QAM

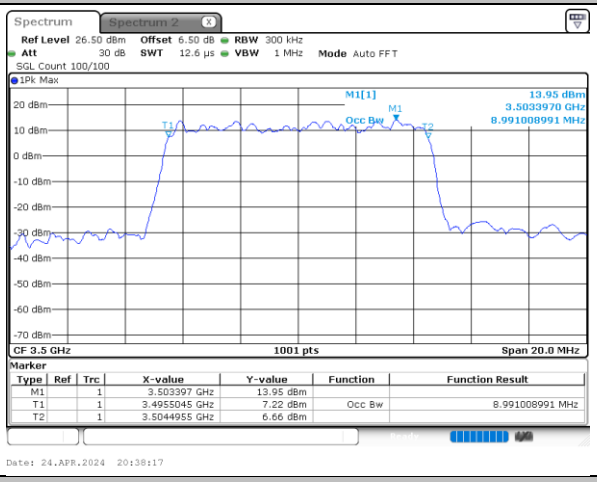

Date: 24.APR.2024 20:38:17

Middle Channel / 15MHz / QPSK

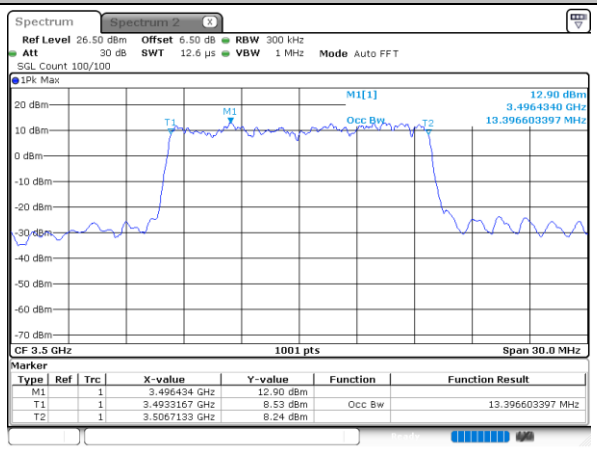

Date: 24.APR.2024 20:41:01

Middle Channel / 15MHz / 16QAM

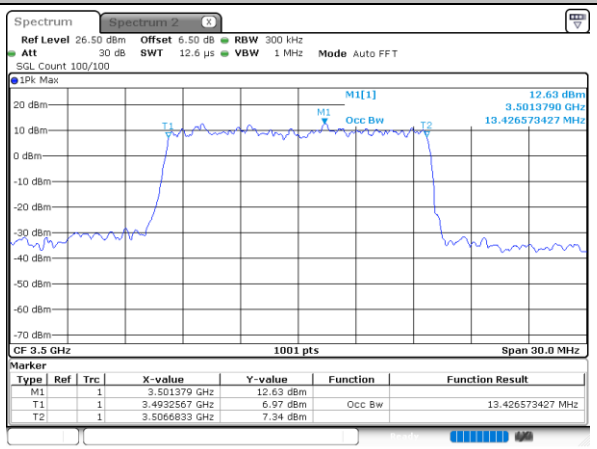

Date: 24.APR.2024 20:41:27

Middle Channel / 20MHz / QPSK

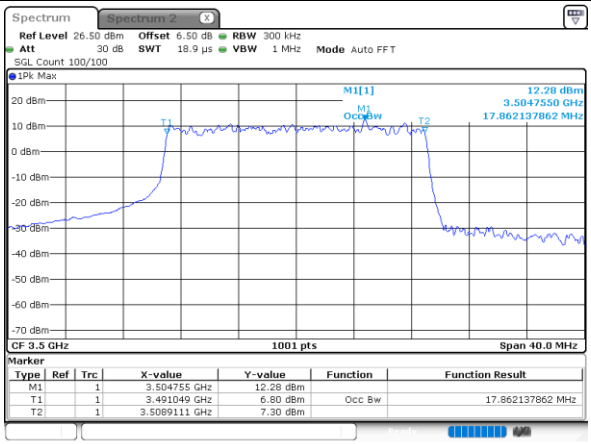

Date: 24.APR.2024 19:33:46

Middle Channel / 20MHz / 16QAM

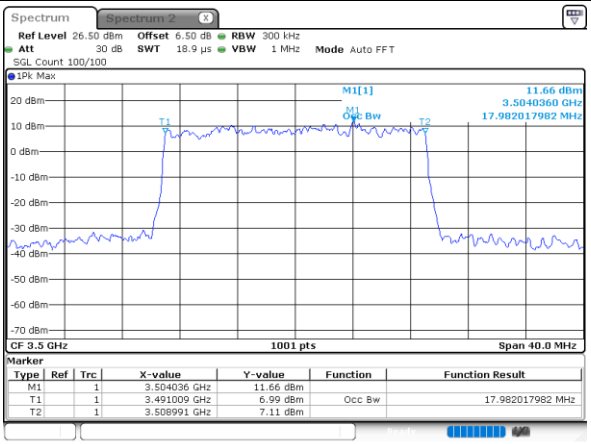

Date: 24.APR.2024 19:34:27

Conducted Band Edge

LTE Band 42 / 5MHz / QPSK

Lowest Band Edge / 1 RB

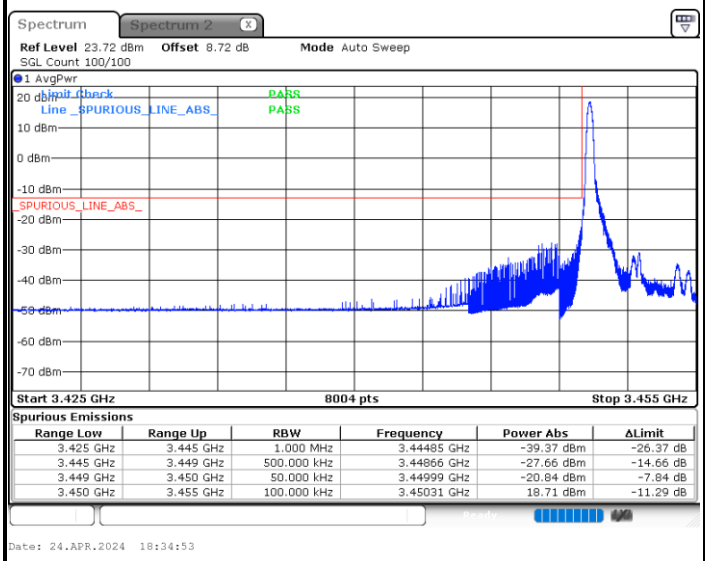

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44485 GHz	-39.37 dBm	-26.37 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44866 GHz	-27.66 dBm	-14.66 dB
3.449 GHz	3.450 GHz	50.000 kHz	3.44999 GHz	-20.84 dBm	-7.84 dB
3.450 GHz	3.455 GHz	100.000 kHz	3.45031 GHz	18.71 dBm	-11.29 dB

Date: 24.APR.2024 18:34:53

Highest Band Edge / 1 RB

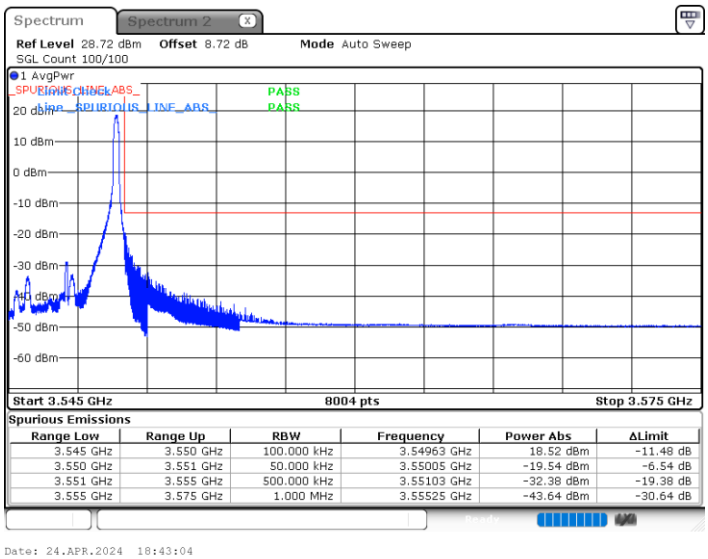

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.545 GHz	3.550 GHz	100.000 kHz	3.54963 GHz	18.52 dBm	-11.48 dB
3.550 GHz	3.551 GHz	50.000 kHz	3.55005 GHz	-19.54 dBm	-6.54 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55103 GHz	-32.38 dBm	-19.38 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55525 GHz	-43.64 dBm	-30.64 dB

Date: 24.APR.2024 18:43:04

Lowest Band Edge / Full RB

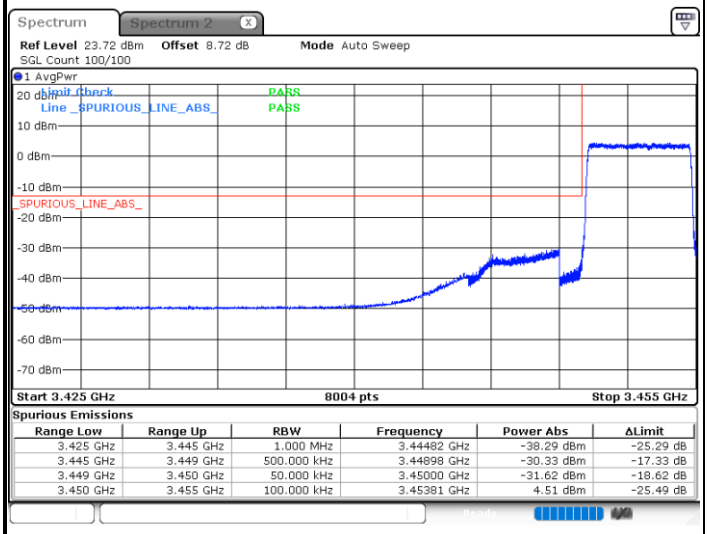

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44482 GHz	-38.29 dBm	-25.29 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44898 GHz	-30.33 dBm	-17.33 dB
3.449 GHz	3.450 GHz	50.000 kHz	3.45000 GHz	-31.62 dBm	-18.62 dB
3.450 GHz	3.455 GHz	100.000 kHz	3.45381 GHz	4.51 dBm	-25.49 dB

Date: 24.APR.2024 18:37:28

Highest Band Edge / Full RB

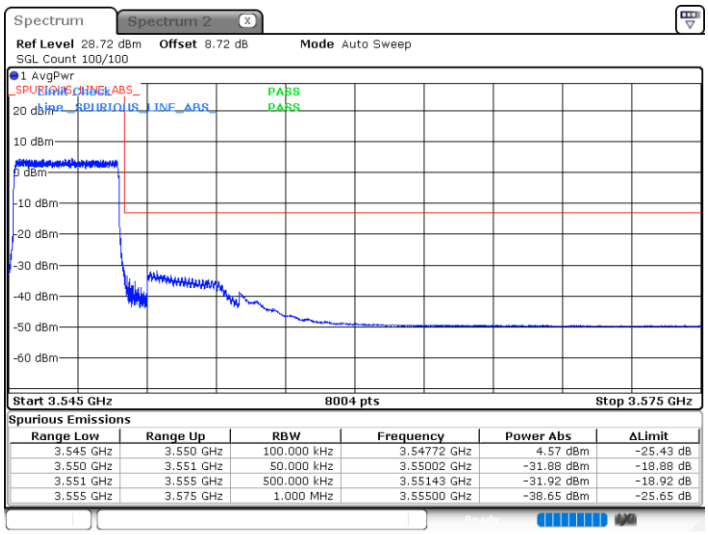

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.545 GHz	3.550 GHz	100.000 kHz	3.54772 GHz	4.57 dBm	-25.43 dB
3.550 GHz	3.551 GHz	50.000 kHz	3.55002 GHz	-31.88 dBm	-18.88 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55143 GHz	-31.92 dBm	-18.92 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55500 GHz	-38.65 dBm	-25.65 dB

Date: 24.APR.2024 18:45:37

LTE Band 42 / 5MHz / 16QAM

Lowest Band Edge / 1RB

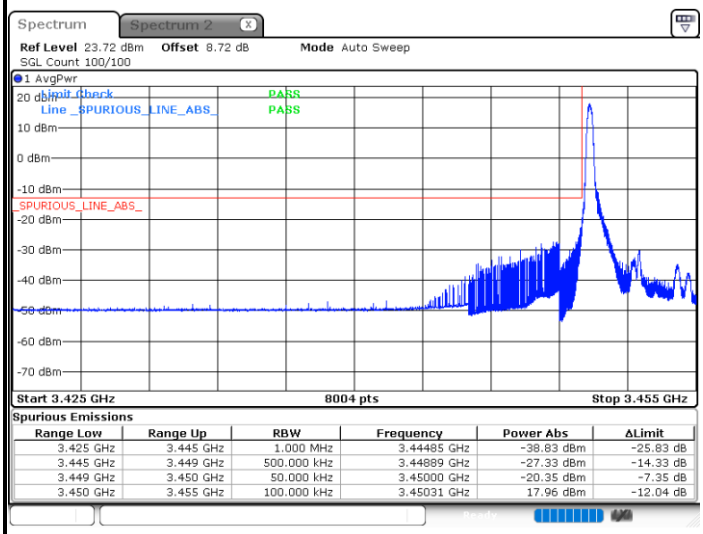

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44485 GHz	-38.83 dBm	-25.83 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44889 GHz	-27.33 dBm	-14.33 dB
3.449 GHz	3.450 GHz	50.000 kHz	3.45000 GHz	-20.35 dBm	-7.35 dB
3.450 GHz	3.455 GHz	100.000 kHz	3.45031 GHz	17.96 dBm	-12.04 dB

Date: 24.APR.2024 18:35:45

Highest Band Edge / 1 RB

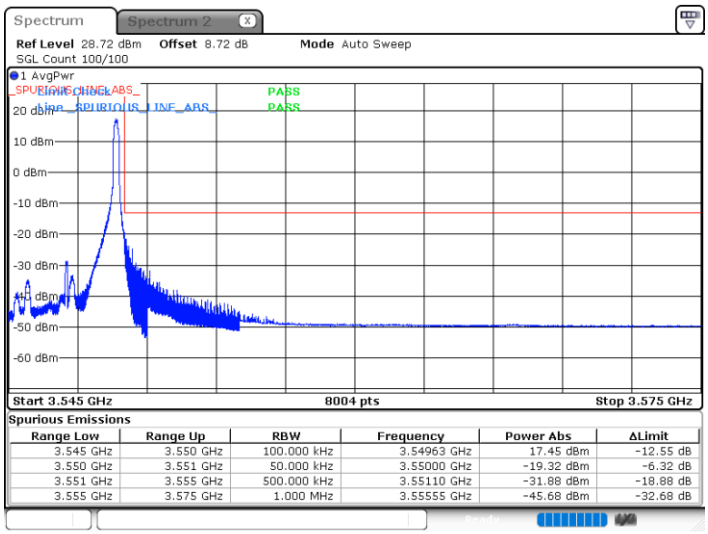

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.545 GHz	3.550 GHz	100.000 kHz	3.54963 GHz	17.45 dBm	-12.55 dB
3.550 GHz	3.551 GHz	50.000 kHz	3.55000 GHz	-19.32 dBm	-6.32 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55110 GHz	-31.88 dBm	-18.88 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55555 GHz	-45.68 dBm	-32.68 dB

Date: 24.APR.2024 18:43:55

Lowest Band Edge / Full RB

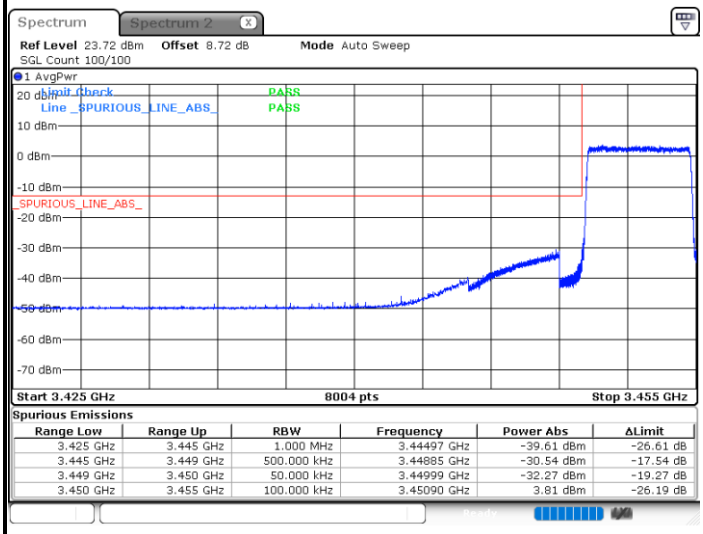

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44497 GHz	-39.61 dBm	-26.61 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44885 GHz	-30.54 dBm	-17.54 dB
3.449 GHz	3.450 GHz	50.000 kHz	3.44999 GHz	-32.27 dBm	-19.27 dB
3.450 GHz	3.455 GHz	100.000 kHz	3.45090 GHz	3.81 dBm	-26.19 dB

Date: 24.APR.2024 18:38:19

Highest Band Edge / Full RB

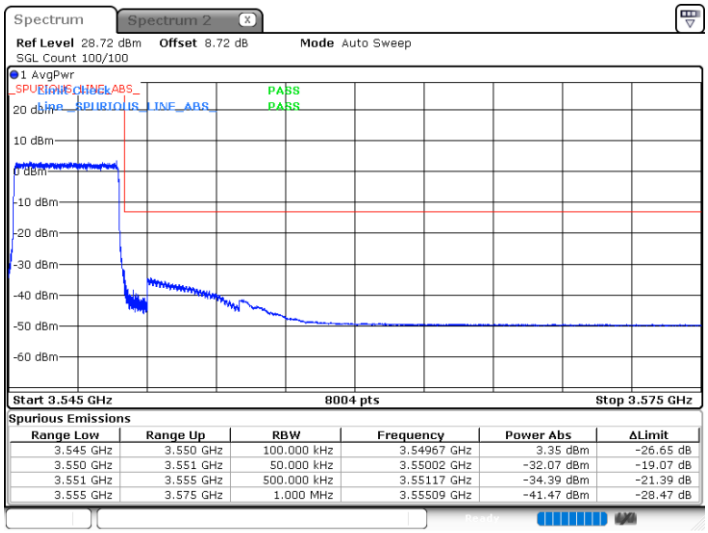

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.545 GHz	3.550 GHz	100.000 kHz	3.54967 GHz	3.35 dBm	-26.65 dB
3.550 GHz	3.551 GHz	50.000 kHz	3.55002 GHz	-32.07 dBm	-19.07 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55117 GHz	-34.39 dBm	-21.39 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55509 GHz	-41.47 dBm	-28.47 dB

Date: 24.APR.2024 18:46:28

LTE Band 42 / 5MHz / 64QAM

Lowest Band Edge / 1RB

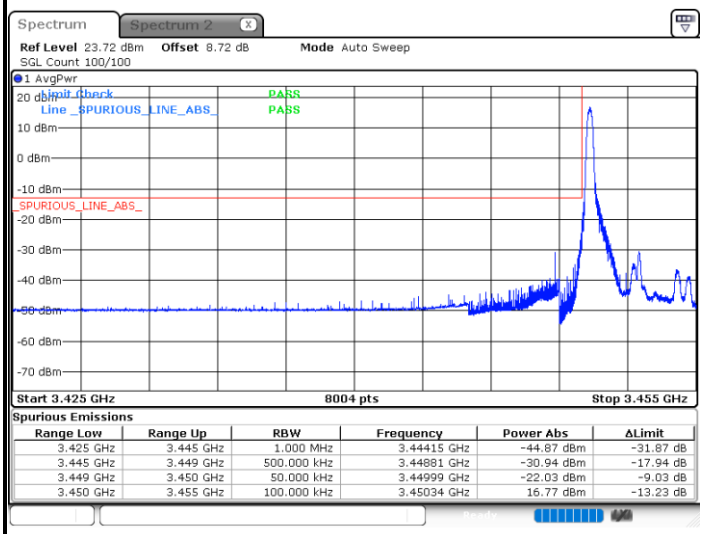

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44415 GHz	-44.87 dBm	-31.87 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44881 GHz	-30.94 dBm	-17.94 dB
3.449 GHz	3.450 GHz	50.000 kHz	3.44999 GHz	-22.03 dBm	-9.03 dB
3.450 GHz	3.455 GHz	100.000 kHz	3.45034 GHz	16.77 dBm	-13.23 dB

Date: 24.APR.2024 18:36:36

Highest Band Edge / 1 RB

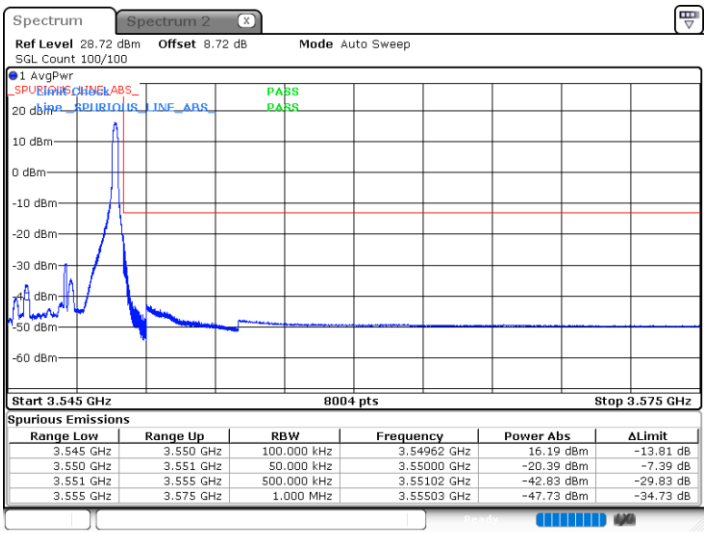

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.545 GHz	3.550 GHz	100.000 kHz	3.54962 GHz	16.19 dBm	-13.81 dB
3.550 GHz	3.551 GHz	50.000 kHz	3.55000 GHz	-20.39 dBm	-7.39 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55102 GHz	-42.83 dBm	-29.83 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55503 GHz	-47.73 dBm	-34.73 dB

Date: 24.APR.2024 18:44:46

Lowest Band Edge / Full RB

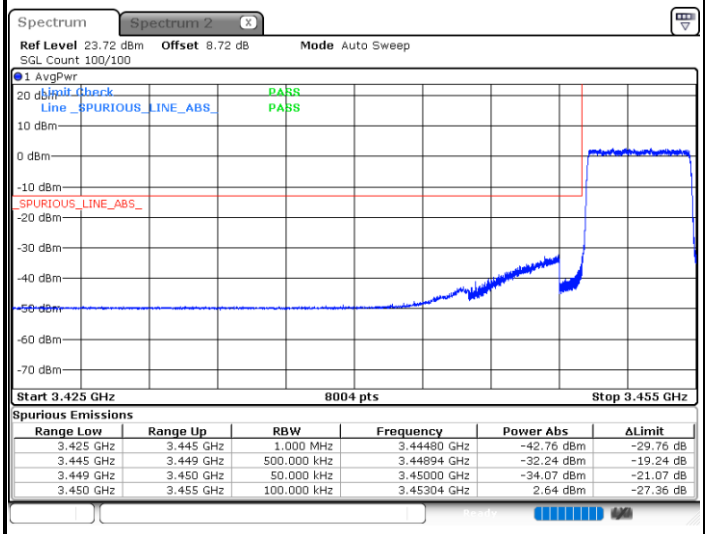

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44480 GHz	-42.76 dBm	-29.76 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44894 GHz	-32.24 dBm	-19.24 dB
3.449 GHz	3.450 GHz	50.000 kHz	3.45000 GHz	-34.07 dBm	-21.07 dB
3.450 GHz	3.455 GHz	100.000 kHz	3.45304 GHz	2.64 dBm	-27.36 dB

Date: 24.APR.2024 18:39:10

Highest Band Edge / Full RB

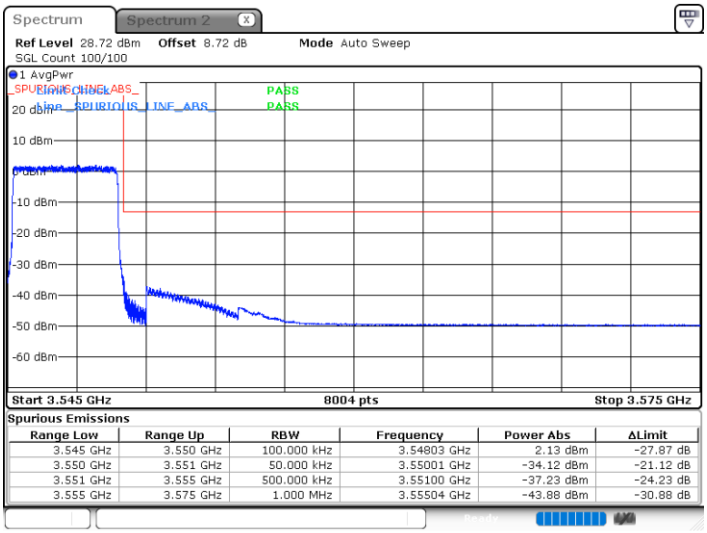

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.545 GHz	3.550 GHz	100.000 kHz	3.54803 GHz	2.13 dBm	-27.87 dB
3.550 GHz	3.551 GHz	50.000 kHz	3.55001 GHz	-34.12 dBm	-21.12 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55100 GHz	-37.23 dBm	-24.23 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55504 GHz	-43.88 dBm	-30.88 dB

Date: 24.APR.2024 18:47:20

LTE Band 42 / 10MHz / QPSK

Lowest Band Edge / 1 RB

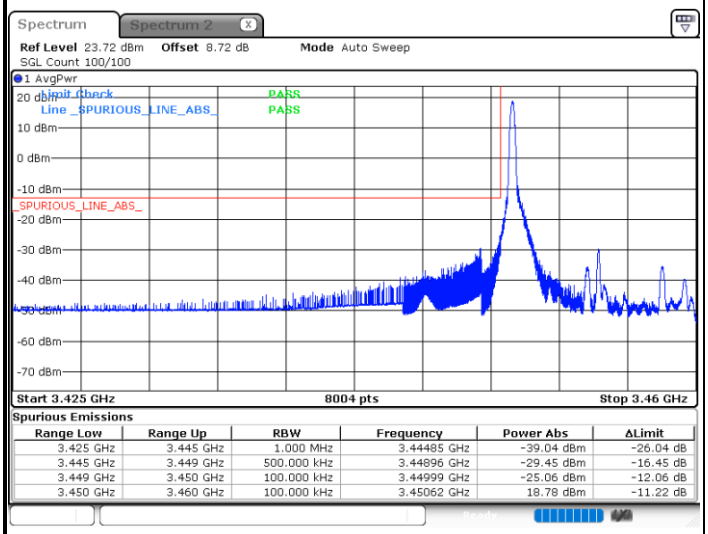

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44485 GHz	-39.04 dBm	-26.04 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44896 GHz	-29.45 dBm	-16.45 dB
3.449 GHz	3.450 GHz	100.000 kHz	3.44999 GHz	-25.06 dBm	-12.06 dB
3.450 GHz	3.460 GHz	100.000 kHz	3.45062 GHz	18.78 dBm	-11.22 dB

Date: 24.APR.2024 18:50:14

Highest Band Edge / 1 RB

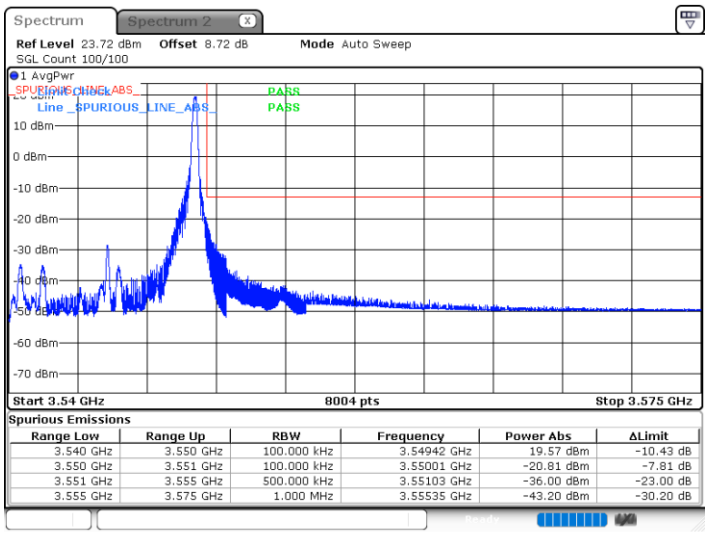

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.540 GHz	3.550 GHz	100.000 kHz	3.54942 GHz	19.57 dBm	-10.43 dB
3.550 GHz	3.551 GHz	100.000 kHz	3.55001 GHz	-20.81 dBm	-7.81 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55103 GHz	-36.00 dBm	-23.00 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55535 GHz	-43.20 dBm	-30.20 dB

Date: 24.APR.2024 18:58:23

Lowest Band Edge / Full RB

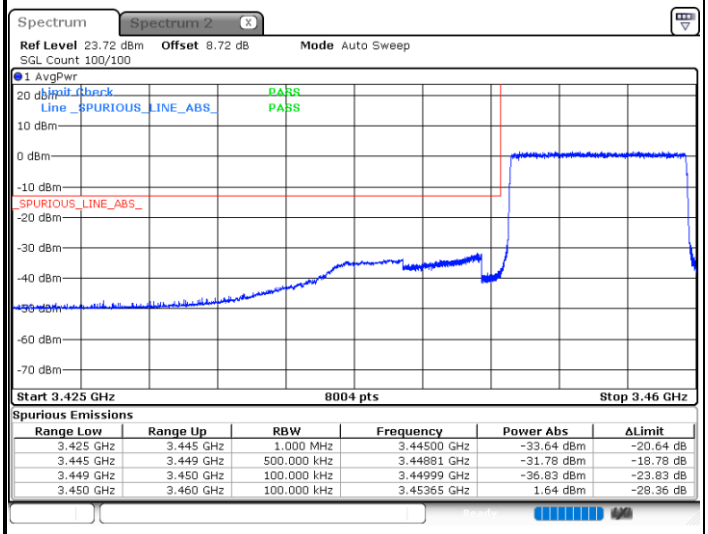

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44500 GHz	-33.64 dBm	-20.64 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44881 GHz	-31.78 dBm	-18.78 dB
3.449 GHz	3.450 GHz	100.000 kHz	3.44999 GHz	-36.83 dBm	-23.83 dB
3.450 GHz	3.460 GHz	100.000 kHz	3.45365 GHz	1.64 dBm	-28.36 dB

Date: 24.APR.2024 18:52:47

Highest Band Edge / Full RB

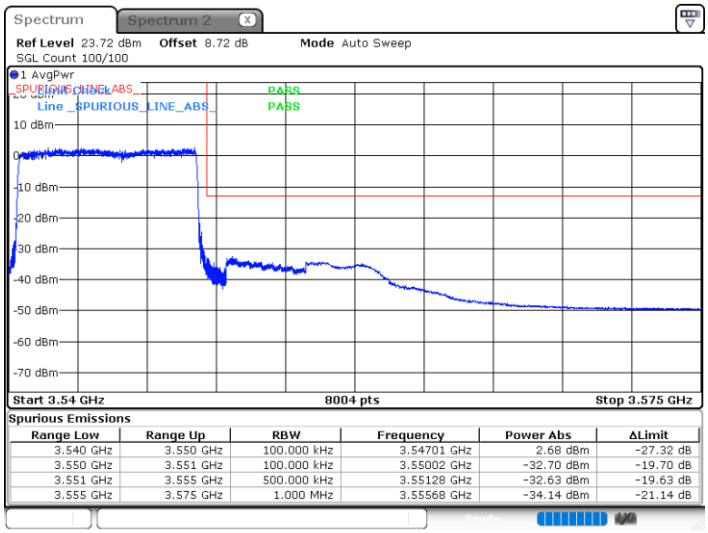

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.540 GHz	3.550 GHz	100.000 kHz	3.54701 GHz	2.68 dBm	-27.32 dB
3.550 GHz	3.551 GHz	100.000 kHz	3.55002 GHz	-32.70 dBm	-19.70 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55128 GHz	-32.63 dBm	-19.63 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55568 GHz	-34.14 dBm	-21.14 dB

Date: 24.APR.2024 19:00:57

LTE Band 42 / 10MHz / 16QAM

Lowest Band Edge / 1 RB

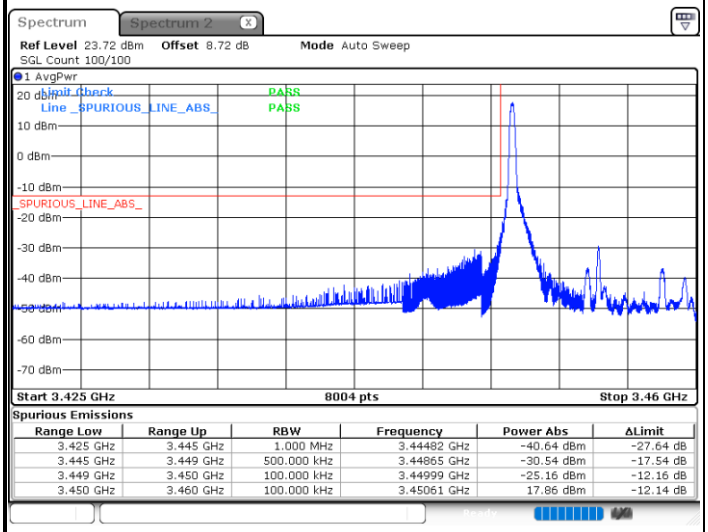

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44482 GHz	-40.64 dBm	-27.64 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44865 GHz	-30.54 dBm	-17.54 dB
3.449 GHz	3.450 GHz	100.000 kHz	3.44999 GHz	-25.16 dBm	-12.16 dB
3.450 GHz	3.460 GHz	100.000 kHz	3.45061 GHz	17.86 dBm	-12.14 dB

Date: 24.APR.2024 18:51:05

Highest Band Edge / 1 RB

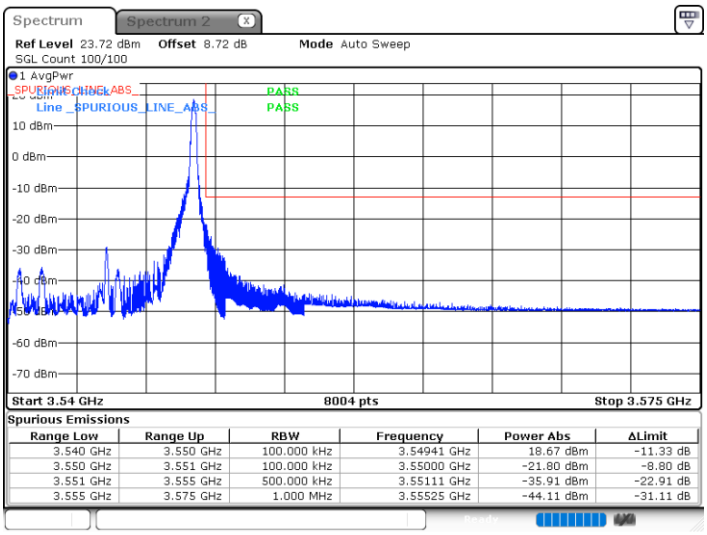

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.540 GHz	3.550 GHz	100.000 kHz	3.54941 GHz	18.67 dBm	-11.33 dB
3.550 GHz	3.551 GHz	100.000 kHz	3.55000 GHz	-21.80 dBm	-8.80 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55111 GHz	-35.91 dBm	-22.91 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55525 GHz	-44.11 dBm	-31.11 dB

Date: 24.APR.2024 18:59:14

Lowest Band Edge / Full RB

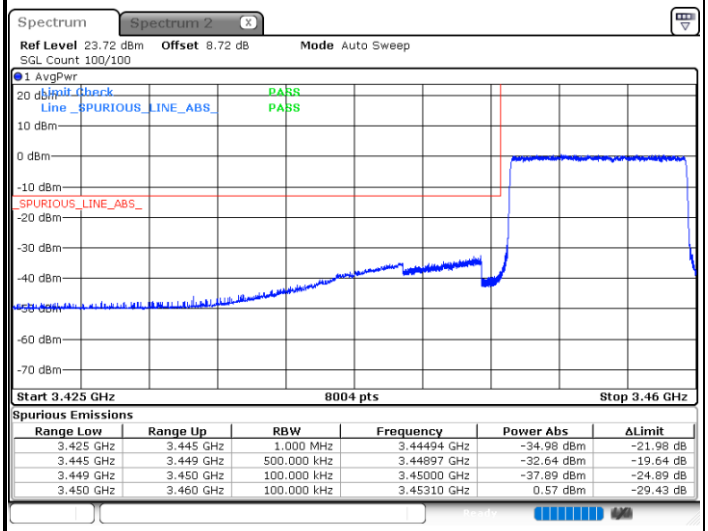

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44494 GHz	-34.98 dBm	-21.98 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44897 GHz	-32.64 dBm	-19.64 dB
3.449 GHz	3.450 GHz	100.000 kHz	3.45000 GHz	-37.89 dBm	-24.89 dB
3.450 GHz	3.460 GHz	100.000 kHz	3.45310 GHz	0.57 dBm	-29.43 dB

Date: 24.APR.2024 18:53:39

Highest Band Edge / Full RB

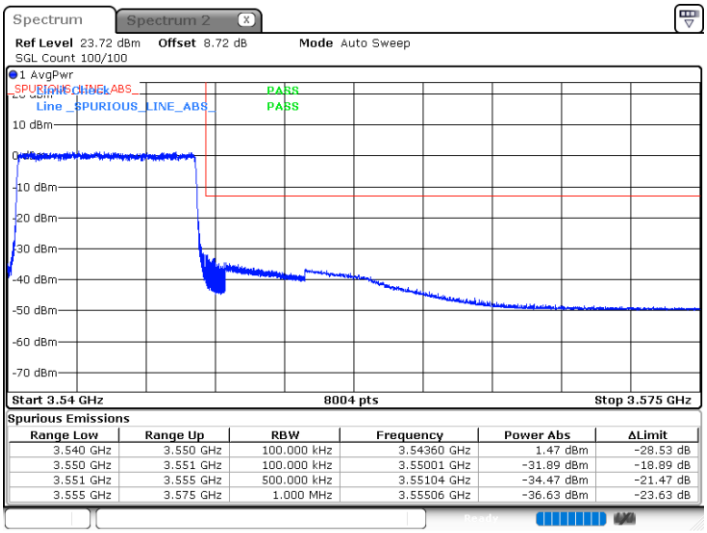

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.540 GHz	3.550 GHz	100.000 kHz	3.54360 GHz	1.47 dBm	-28.53 dB
3.550 GHz	3.551 GHz	100.000 kHz	3.55001 GHz	-31.89 dBm	-18.89 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55104 GHz	-34.47 dBm	-21.47 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55506 GHz	-36.63 dBm	-23.63 dB

Date: 24.APR.2024 19:01:48

LTE Band 42/ 10MHz / 64QAM

Lowest Band Edge / 1 RB

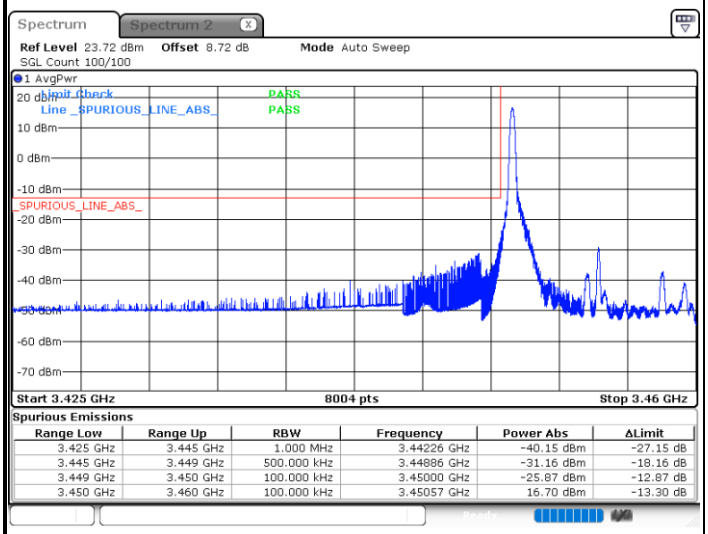

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44226 GHz	-40.15 dBm	-27.15 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44886 GHz	-31.16 dBm	-18.16 dB
3.449 GHz	3.450 GHz	100.000 kHz	3.45000 GHz	-25.87 dBm	-12.87 dB
3.450 GHz	3.460 GHz	100.000 kHz	3.45057 GHz	16.70 dBm	-13.30 dB

Date: 24.APR.2024 18:51:56

Highest Band Edge / 1 RB

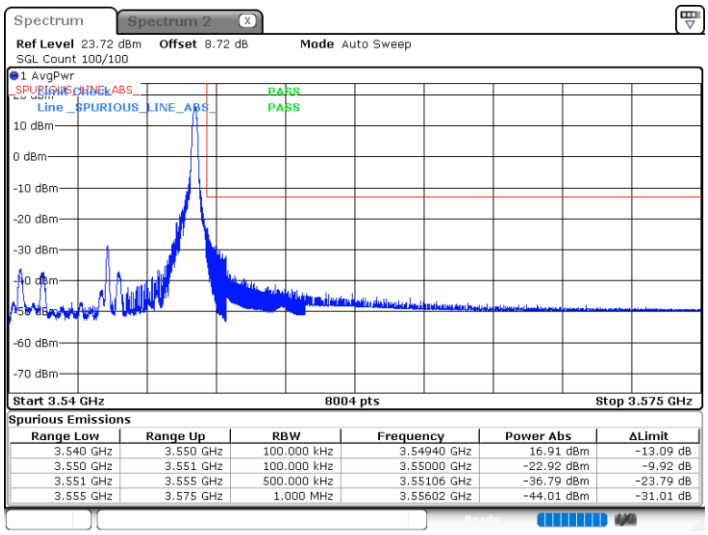

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.540 GHz	3.550 GHz	100.000 kHz	3.54940 GHz	16.91 dBm	-13.09 dB
3.550 GHz	3.551 GHz	100.000 kHz	3.55000 GHz	-22.92 dBm	-9.92 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55106 GHz	-36.79 dBm	-23.79 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55602 GHz	-44.01 dBm	-31.01 dB

Date: 24.APR.2024 19:00:05

Lowest Band Edge / Full RB

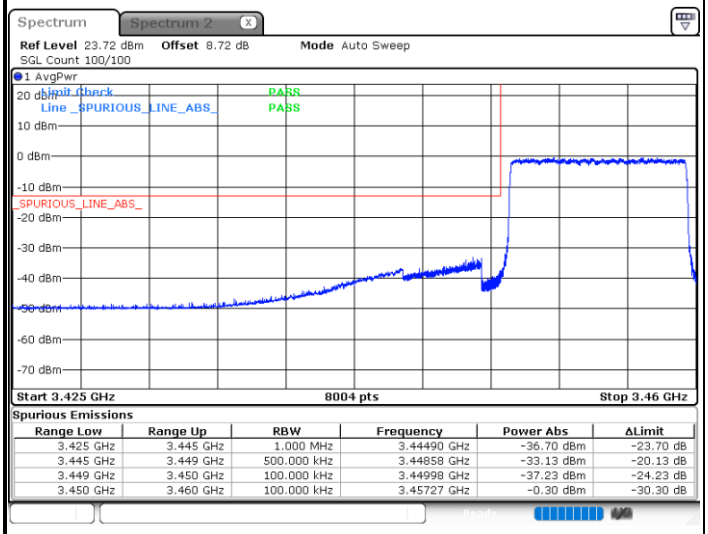

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44490 GHz	-36.70 dBm	-23.70 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44858 GHz	-33.13 dBm	-20.13 dB
3.449 GHz	3.450 GHz	100.000 kHz	3.44998 GHz	-37.23 dBm	-24.23 dB
3.450 GHz	3.460 GHz	100.000 kHz	3.45727 GHz	-0.30 dBm	-30.30 dB

Date: 24.APR.2024 18:54:30

Highest Band Edge / Full RB

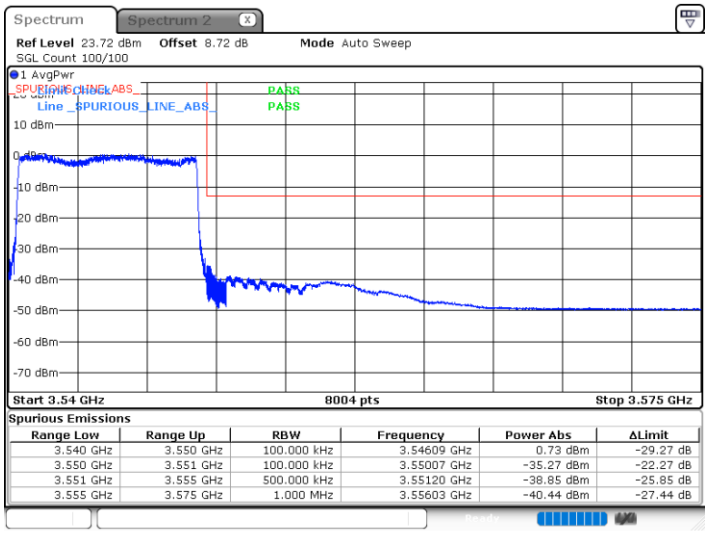

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.540 GHz	3.550 GHz	100.000 kHz	3.54609 GHz	0.73 dBm	-29.27 dB
3.550 GHz	3.551 GHz	100.000 kHz	3.55007 GHz	-35.27 dBm	-22.27 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55120 GHz	-38.85 dBm	-25.85 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55603 GHz	-40.44 dBm	-27.44 dB

Date: 24.APR.2024 19:02:39

LTE Band 42 / 15MHz / QPSK

Lowest Band Edge / 1 RB

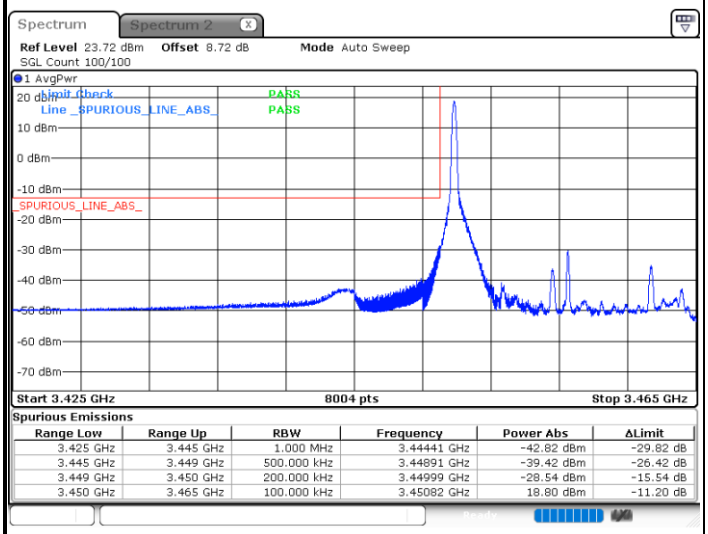

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44441 GHz	-42.82 dBm	-29.82 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44891 GHz	-39.42 dBm	-26.42 dB
3.449 GHz	3.450 GHz	200.000 kHz	3.44999 GHz	-28.54 dBm	-15.54 dB
3.450 GHz	3.465 GHz	100.000 kHz	3.45082 GHz	18.80 dBm	-11.20 dB

Date: 24.APR.2024 19:05:33

Highest Band Edge / 1 RB

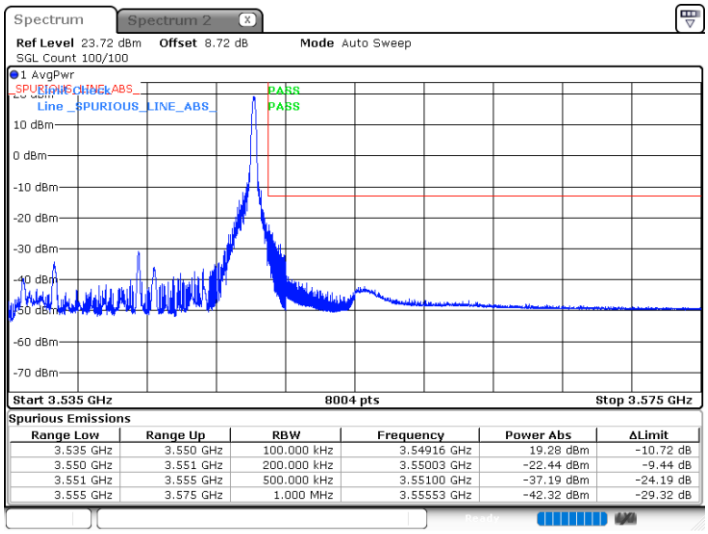

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.535 GHz	3.550 GHz	100.000 kHz	3.54916 GHz	19.28 dBm	-10.72 dB
3.550 GHz	3.551 GHz	200.000 kHz	3.55003 GHz	-22.44 dBm	-9.44 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55100 GHz	-37.19 dBm	-24.19 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55553 GHz	-42.32 dBm	-29.32 dB

Date: 24.APR.2024 19:13:42

Lowest Band Edge / Full RB

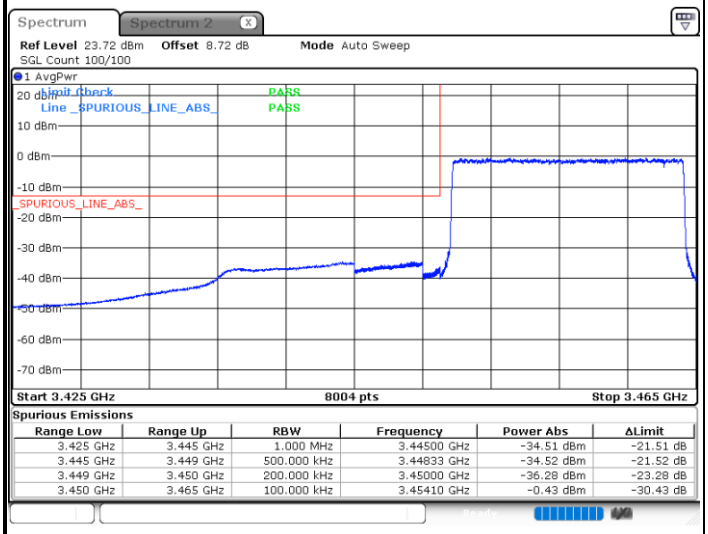

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44500 GHz	-34.51 dBm	-21.51 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44833 GHz	-34.52 dBm	-21.52 dB
3.449 GHz	3.450 GHz	200.000 kHz	3.45000 GHz	-36.28 dBm	-23.28 dB
3.450 GHz	3.465 GHz	100.000 kHz	3.45410 GHz	-0.43 dBm	-30.43 dB

Date: 24.APR.2024 19:08:06

Highest Band Edge / Full RB

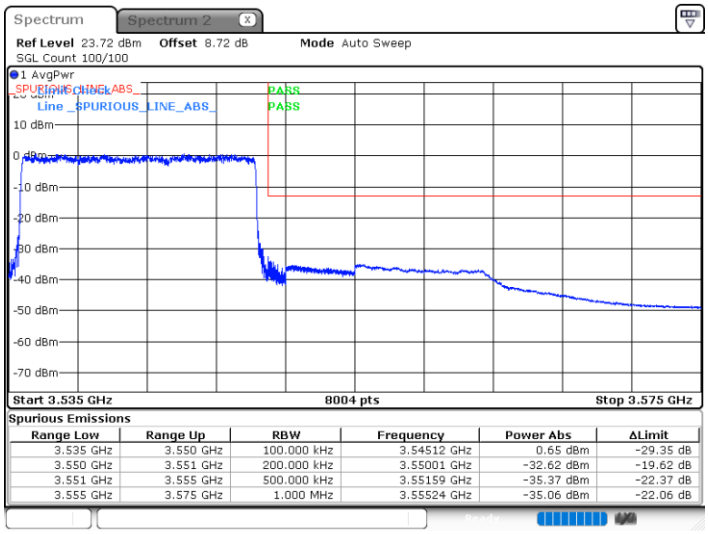

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.535 GHz	3.550 GHz	100.000 kHz	3.54512 GHz	0.65 dBm	-29.35 dB
3.550 GHz	3.551 GHz	200.000 kHz	3.55001 GHz	-32.62 dBm	-19.62 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55159 GHz	-35.37 dBm	-22.37 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55524 GHz	-35.06 dBm	-22.06 dB

Date: 24.APR.2024 19:16:16

LTE Band 42 / 15MHz / 16QAM

Lowest Band Edge / 1 RB

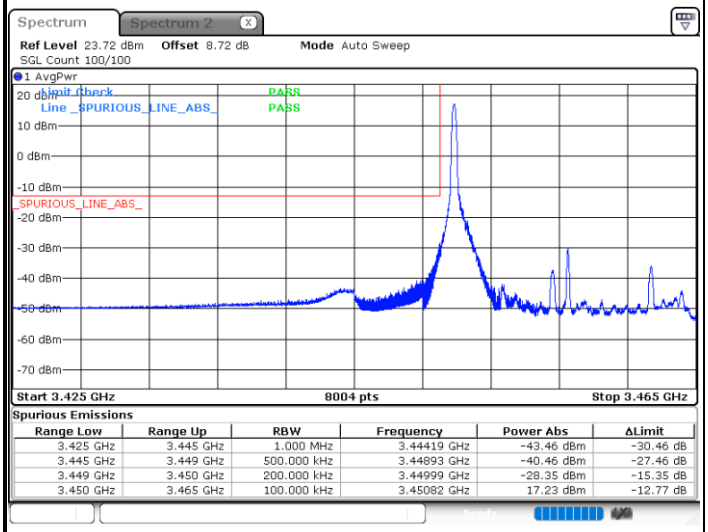

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44419 GHz	-43.46 dBm	-30.46 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44893 GHz	-40.46 dBm	-27.46 dB
3.449 GHz	3.450 GHz	200.000 kHz	3.44999 GHz	-28.35 dBm	-15.35 dB
3.450 GHz	3.465 GHz	100.000 kHz	3.45082 GHz	17.23 dBm	-12.77 dB

Date: 24.APR.2024 19:06:24

Highest Band Edge / 1 RB

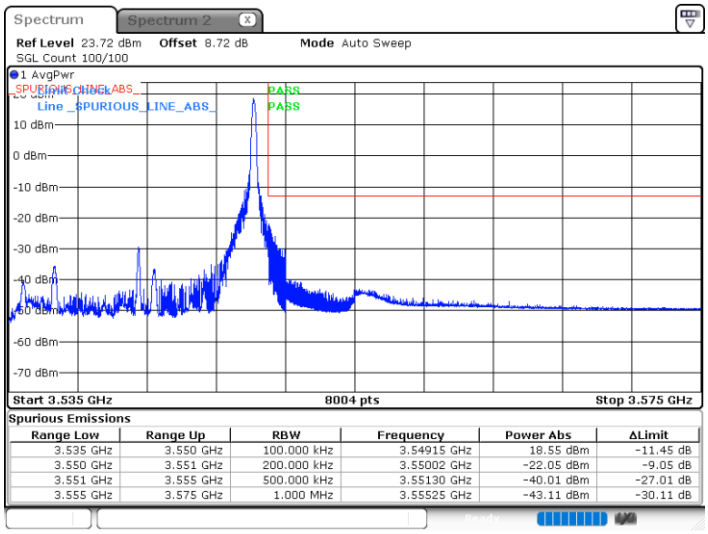

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.535 GHz	3.550 GHz	100.000 kHz	3.54915 GHz	18.55 dBm	-11.45 dB
3.550 GHz	3.551 GHz	200.000 kHz	3.55002 GHz	-22.05 dBm	-9.05 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55130 GHz	-40.01 dBm	-27.01 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55525 GHz	-43.11 dBm	-30.11 dB

Date: 24.APR.2024 19:14:34

Lowest Band Edge / Full RB

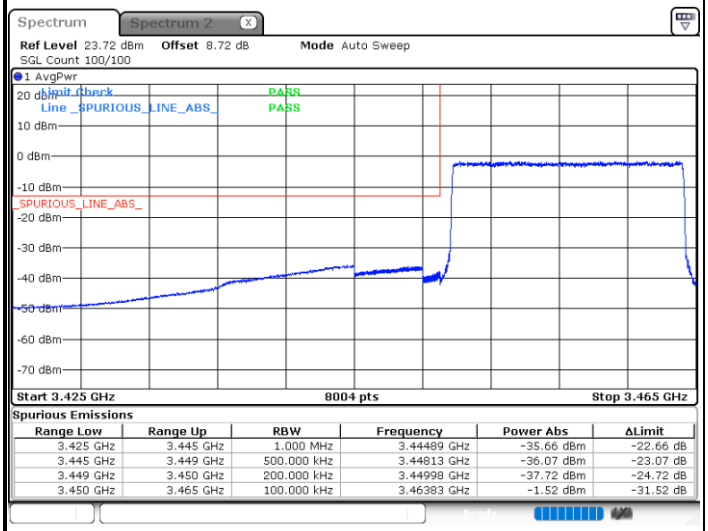

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44489 GHz	-35.66 dBm	-22.66 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44813 GHz	-36.07 dBm	-23.07 dB
3.449 GHz	3.450 GHz	200.000 kHz	3.44998 GHz	-37.72 dBm	-24.72 dB
3.450 GHz	3.465 GHz	100.000 kHz	3.46383 GHz	-1.52 dBm	-31.52 dB

Date: 24.APR.2024 19:08:57

Highest Band Edge / Full RB

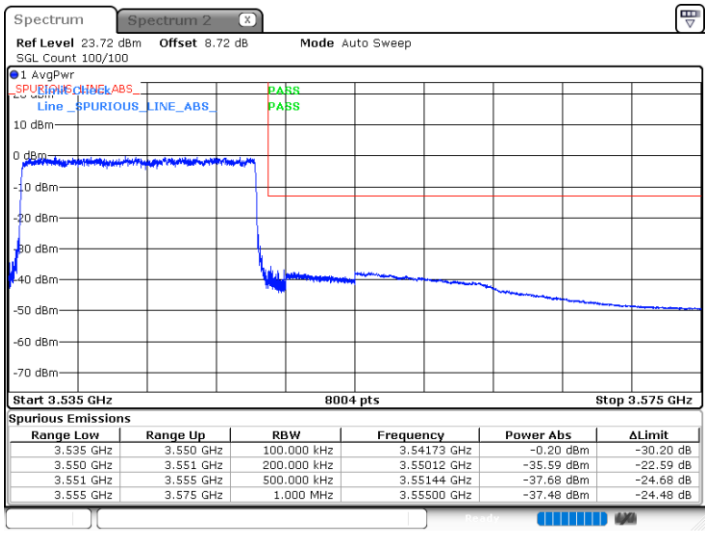

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.535 GHz	3.550 GHz	100.000 kHz	3.54173 GHz	-0.20 dBm	-30.20 dB
3.550 GHz	3.551 GHz	200.000 kHz	3.55012 GHz	-35.59 dBm	-22.59 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55144 GHz	-37.68 dBm	-24.68 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55500 GHz	-37.48 dBm	-24.48 dB

Date: 24.APR.2024 19:17:07

LTE Band 42 / 15MHz / 64QAM

Lowest Band Edge / 1 RB

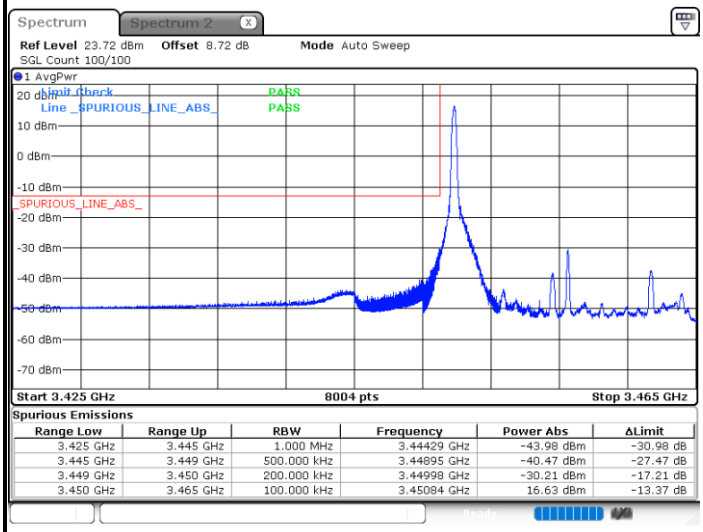

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44429 GHz	-43.98 dBm	-30.98 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44895 GHz	-40.47 dBm	-27.47 dB
3.449 GHz	3.450 GHz	200.000 kHz	3.44998 GHz	-30.21 dBm	-17.21 dB
3.450 GHz	3.465 GHz	100.000 kHz	3.45084 GHz	16.63 dBm	-13.37 dB

Date: 24.APR.2024 19:07:15

Highest Band Edge / 1 RB

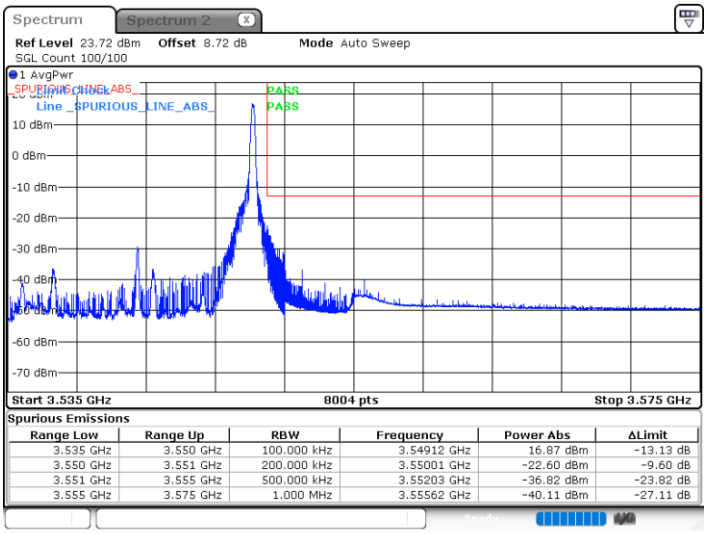

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.535 GHz	3.550 GHz	100.000 kHz	3.54912 GHz	16.87 dBm	-13.13 dB
3.550 GHz	3.551 GHz	200.000 kHz	3.55001 GHz	-22.60 dBm	-9.60 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55203 GHz	-36.82 dBm	-23.82 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55562 GHz	-40.11 dBm	-27.11 dB

Date: 24.APR.2024 19:15:25

Lowest Band Edge / Full RB

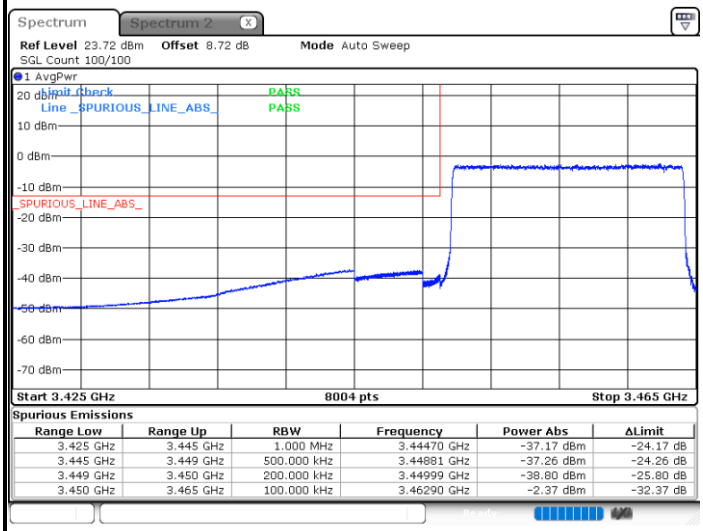

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44470 GHz	-37.17 dBm	-24.17 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44881 GHz	-37.26 dBm	-24.26 dB
3.449 GHz	3.450 GHz	200.000 kHz	3.44999 GHz	-38.80 dBm	-25.80 dB
3.450 GHz	3.465 GHz	100.000 kHz	3.46290 GHz	-2.37 dBm	-32.37 dB

Date: 24.APR.2024 19:09:48

Highest Band Edge / Full RB

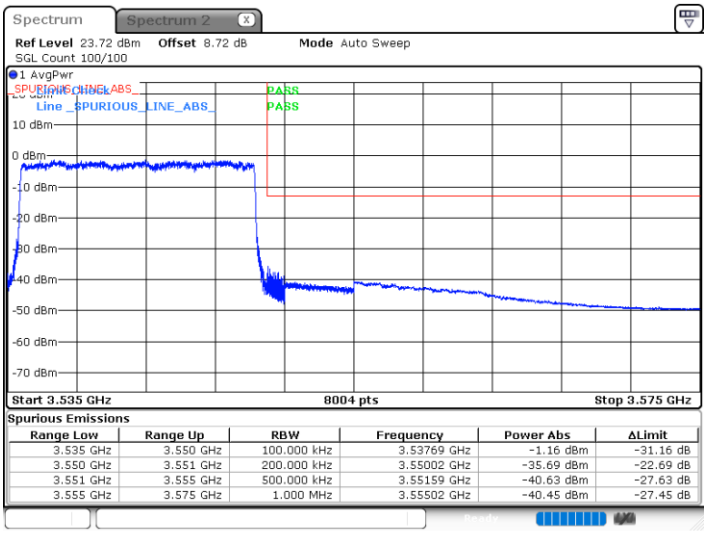

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.535 GHz	3.550 GHz	100.000 kHz	3.53769 GHz	-1.16 dBm	-31.16 dB
3.550 GHz	3.551 GHz	200.000 kHz	3.55002 GHz	-35.69 dBm	-22.69 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55159 GHz	-40.63 dBm	-27.63 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55502 GHz	-40.45 dBm	-27.45 dB

Date: 24.APR.2024 19:17:58

LTE Band 42 / 20MHz / QPSK

Lowest Band Edge / 1 RB

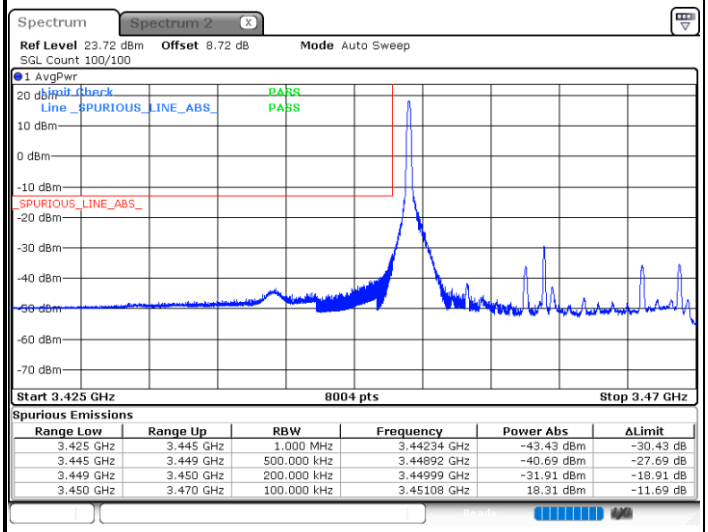

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44234 GHz	-43.43 dBm	-30.43 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44892 GHz	-40.69 dBm	-27.69 dB
3.449 GHz	3.450 GHz	200.000 kHz	3.44999 GHz	-31.91 dBm	-18.91 dB
3.450 GHz	3.470 GHz	100.000 kHz	3.45108 GHz	18.31 dBm	-11.69 dB

Date: 24.APR.2024 19:20:53

Highest Band Edge / 1 RB

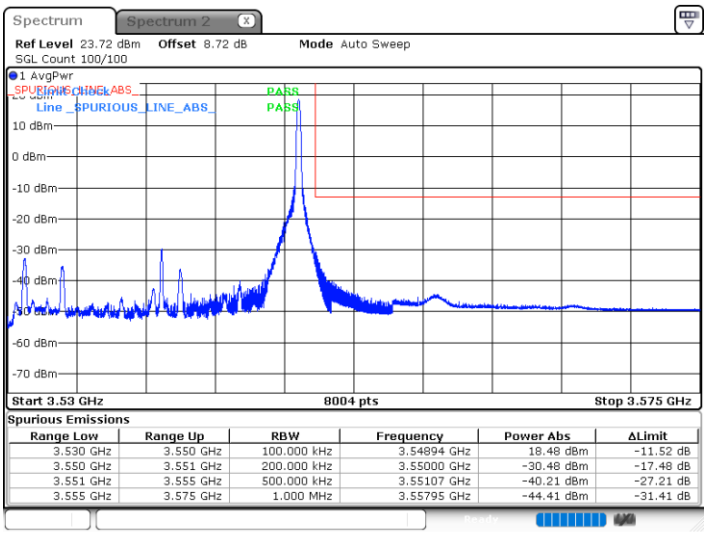

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.530 GHz	3.550 GHz	100.000 kHz	3.54894 GHz	18.48 dBm	-11.52 dB
3.550 GHz	3.551 GHz	200.000 kHz	3.55000 GHz	-30.48 dBm	-17.48 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55107 GHz	-40.21 dBm	-27.21 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55795 GHz	-44.41 dBm	-31.41 dB

Date: 24.APR.2024 19:29:02

Lowest Band Edge / Full RB

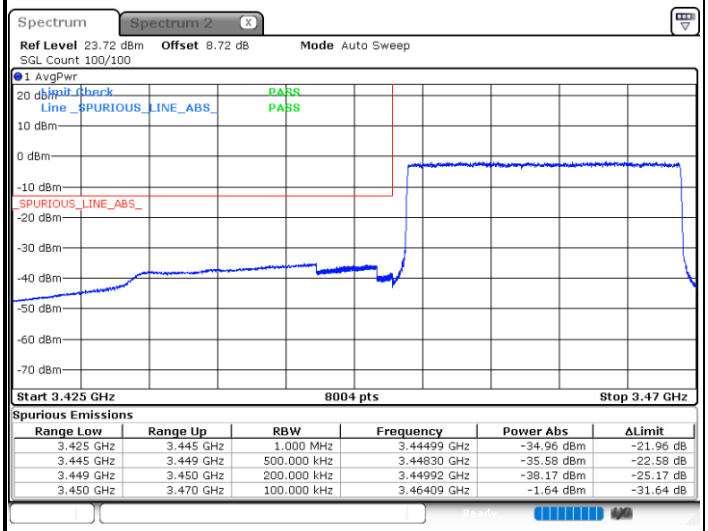

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44499 GHz	-34.96 dBm	-21.96 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44830 GHz	-35.58 dBm	-22.58 dB
3.449 GHz	3.450 GHz	200.000 kHz	3.44992 GHz	-38.17 dBm	-25.17 dB
3.450 GHz	3.470 GHz	100.000 kHz	3.46409 GHz	-1.64 dBm	-31.64 dB

Date: 24.APR.2024 19:23:26

Highest Band Edge / Full RB

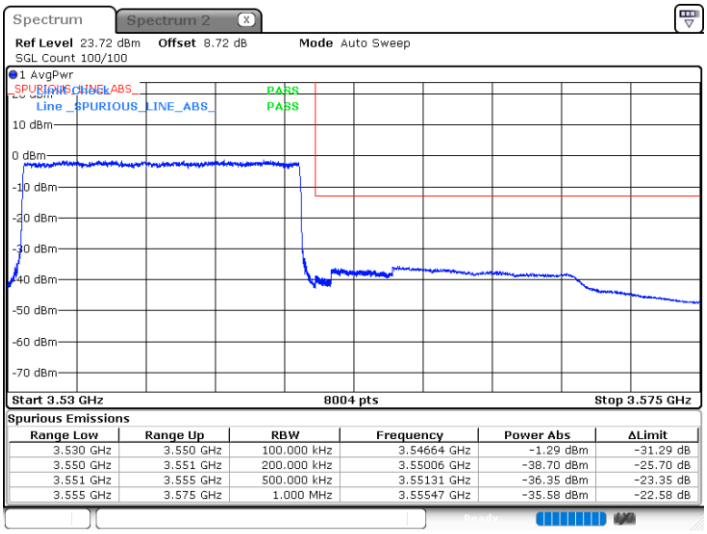

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.530 GHz	3.550 GHz	100.000 kHz	3.54664 GHz	-1.29 dBm	-31.29 dB
3.550 GHz	3.551 GHz	200.000 kHz	3.55006 GHz	-38.70 dBm	-25.70 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55131 GHz	-36.35 dBm	-23.35 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55547 GHz	-35.58 dBm	-22.58 dB

Date: 24.APR.2024 19:31:37

LTE Band 42 / 20MHz / 16QAM

Lowest Band Edge / 1 RB

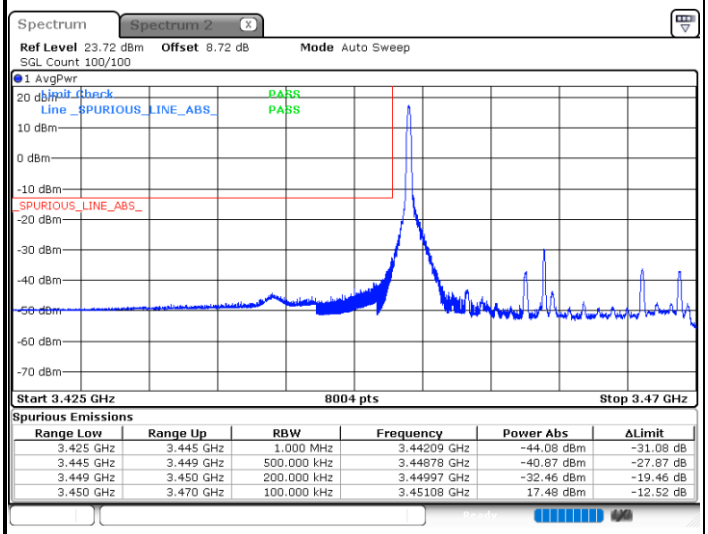

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44209 GHz	-44.08 dBm	-31.08 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44878 GHz	-40.87 dBm	-27.87 dB
3.449 GHz	3.450 GHz	200.000 kHz	3.44997 GHz	-32.46 dBm	-19.46 dB
3.450 GHz	3.470 GHz	100.000 kHz	3.45108 GHz	17.48 dBm	-12.52 dB

Date: 24.APR.2024 19:21:44

Highest Band Edge / 1 RB

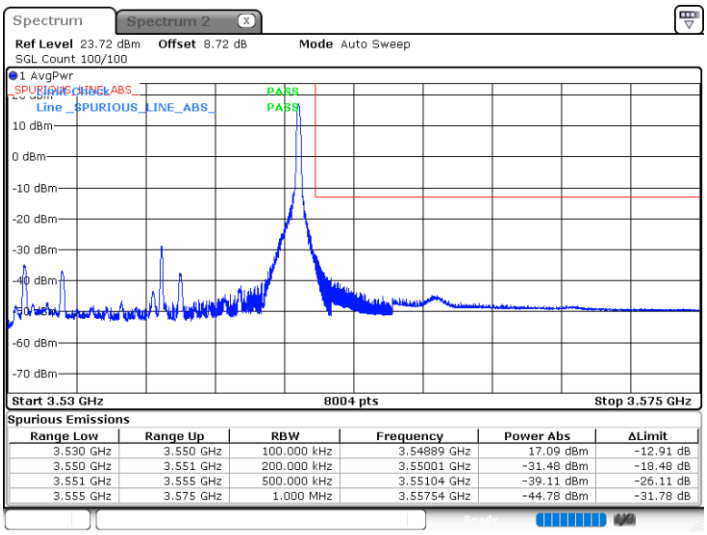

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.530 GHz	3.550 GHz	100.000 kHz	3.54889 GHz	17.09 dBm	-12.91 dB
3.550 GHz	3.551 GHz	200.000 kHz	3.55001 GHz	-31.48 dBm	-18.48 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55104 GHz	-39.11 dBm	-26.11 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55754 GHz	-44.78 dBm	-31.78 dB

Date: 24.APR.2024 19:29:53

Lowest Band Edge / Full RB

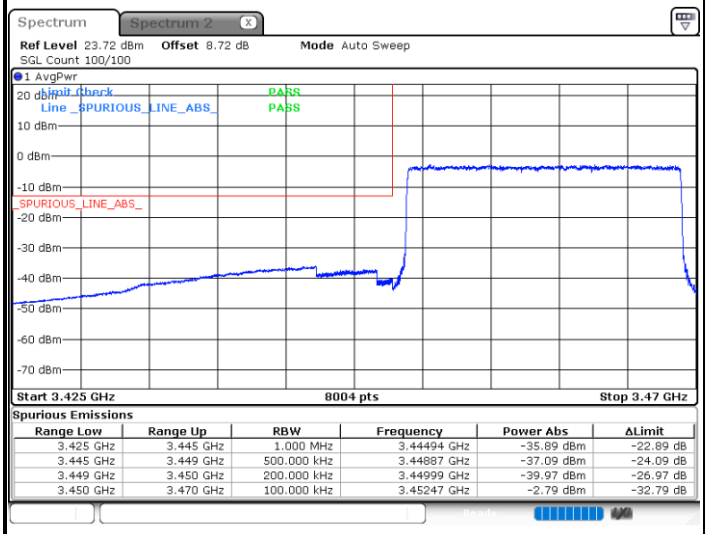

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44494 GHz	-35.89 dBm	-22.89 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44887 GHz	-37.09 dBm	-24.09 dB
3.449 GHz	3.450 GHz	200.000 kHz	3.44999 GHz	-39.97 dBm	-26.97 dB
3.450 GHz	3.470 GHz	100.000 kHz	3.45247 GHz	-2.79 dBm	-32.79 dB

Date: 24.APR.2024 19:24:17

Highest Band Edge / Full RB

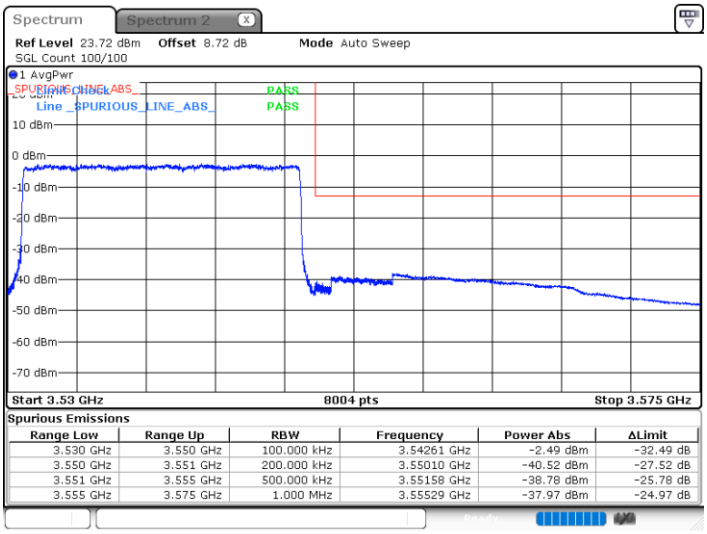

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.530 GHz	3.550 GHz	100.000 kHz	3.54261 GHz	-2.49 dBm	-32.49 dB
3.550 GHz	3.551 GHz	200.000 kHz	3.55010 GHz	-40.52 dBm	-27.52 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55158 GHz	-38.78 dBm	-25.78 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55529 GHz	-37.97 dBm	-24.97 dB

Date: 24.APR.2024 19:32:28

LTE Band 42 / 20MHz / 64QAM

Lowest Band Edge / 1 RB

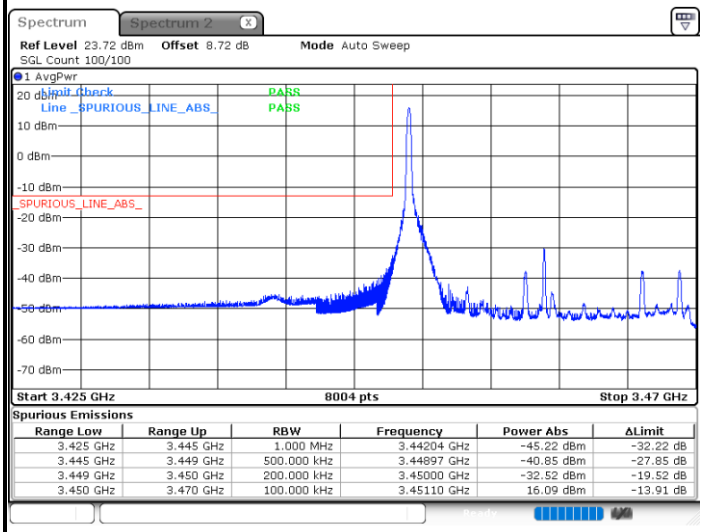

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44204 GHz	-45.22 dBm	-32.22 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44897 GHz	-40.85 dBm	-27.85 dB
3.449 GHz	3.450 GHz	200.000 kHz	3.45000 GHz	-32.52 dBm	-19.52 dB
3.450 GHz	3.470 GHz	100.000 kHz	3.45110 GHz	16.09 dBm	-13.91 dB

Date: 24.APR.2024 19:22:35

Highest Band Edge / 1 RB

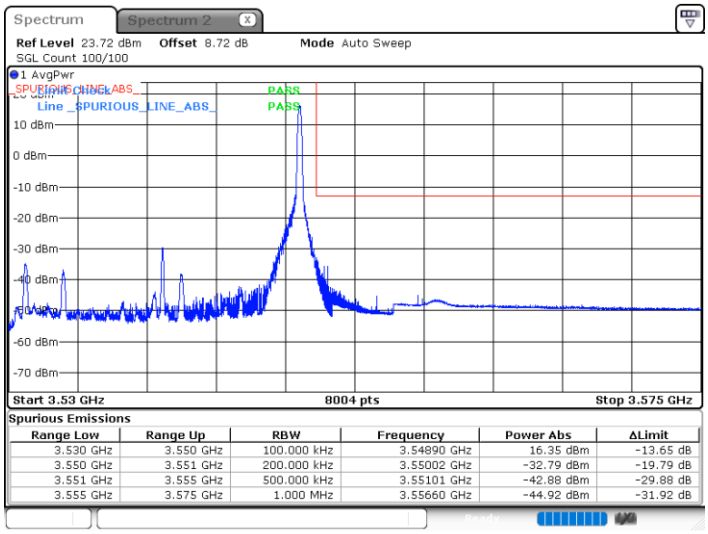

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.530 GHz	3.550 GHz	100.000 kHz	3.54890 GHz	16.35 dBm	-13.65 dB
3.550 GHz	3.551 GHz	200.000 kHz	3.55002 GHz	-32.79 dBm	-19.79 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55101 GHz	-42.88 dBm	-29.88 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55660 GHz	-44.92 dBm	-31.92 dB

Date: 24.APR.2024 19:30:45

Lowest Band Edge / Full RB

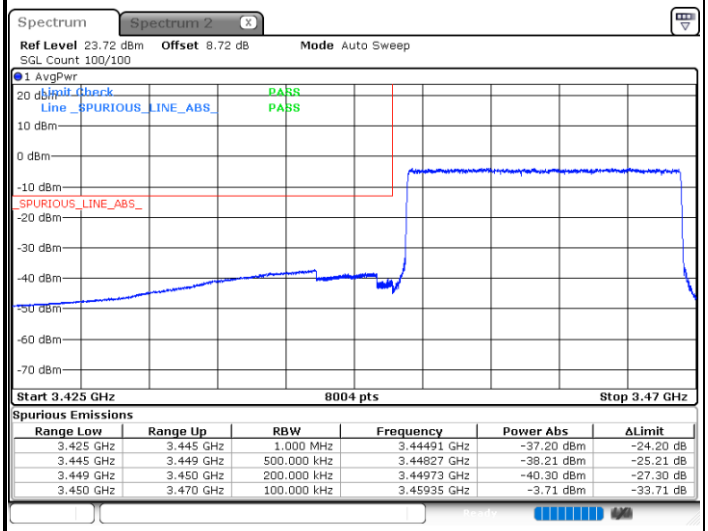

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.425 GHz	3.445 GHz	1.000 MHz	3.44491 GHz	-37.20 dBm	-24.20 dB
3.445 GHz	3.449 GHz	500.000 kHz	3.44827 GHz	-38.21 dBm	-25.21 dB
3.449 GHz	3.450 GHz	200.000 kHz	3.44973 GHz	-40.30 dBm	-27.30 dB
3.450 GHz	3.470 GHz	100.000 kHz	3.45935 GHz	-3.71 dBm	-33.71 dB

Date: 24.APR.2024 19:25:08

Highest Band Edge / Full RB

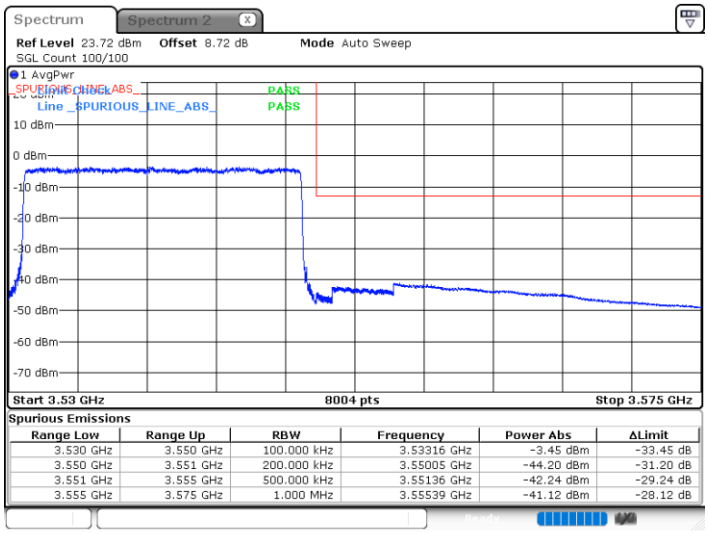

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.530 GHz	3.550 GHz	100.000 kHz	3.53316 GHz	-3.45 dBm	-33.45 dB
3.550 GHz	3.551 GHz	200.000 kHz	3.55005 GHz	-44.20 dBm	-31.20 dB
3.551 GHz	3.555 GHz	500.000 kHz	3.55136 GHz	-42.24 dBm	-29.24 dB
3.555 GHz	3.575 GHz	1.000 MHz	3.55539 GHz	-41.12 dBm	-28.12 dB

Date: 24.APR.2024 19:33:19

Conducted Spurious Emission

LTE Band 42 / 5MHz

Lowest Channel / QPSK

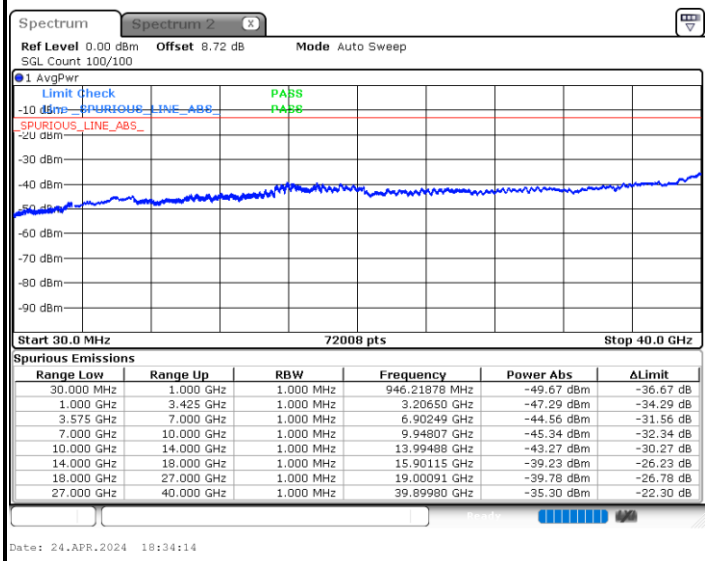

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	1.000 GHz	1.000 MHz	946.21878 MHz	-49.67 dBm	-36.67 dB
1.000 GHz	3.425 GHz	1.000 MHz	3.20650 GHz	-47.29 dBm	-34.29 dB
3.575 GHz	7.000 GHz	1.000 MHz	6.90249 GHz	-44.56 dBm	-31.56 dB
7.000 GHz	10.000 GHz	1.000 MHz	9.94807 GHz	-45.34 dBm	-32.34 dB
10.000 GHz	14.000 GHz	1.000 MHz	13.99488 GHz	-43.27 dBm	-30.27 dB
14.000 GHz	18.000 GHz	1.000 MHz	15.90115 GHz	-39.23 dBm	-26.23 dB
18.000 GHz	27.000 GHz	1.000 MHz	19.00091 GHz	-39.78 dBm	-26.78 dB
27.000 GHz	40.000 GHz	1.000 MHz	39.89980 GHz	-35.30 dBm	-22.30 dB

Date: 24.APR.2024 18:34:14

Middle Channel / QPSK

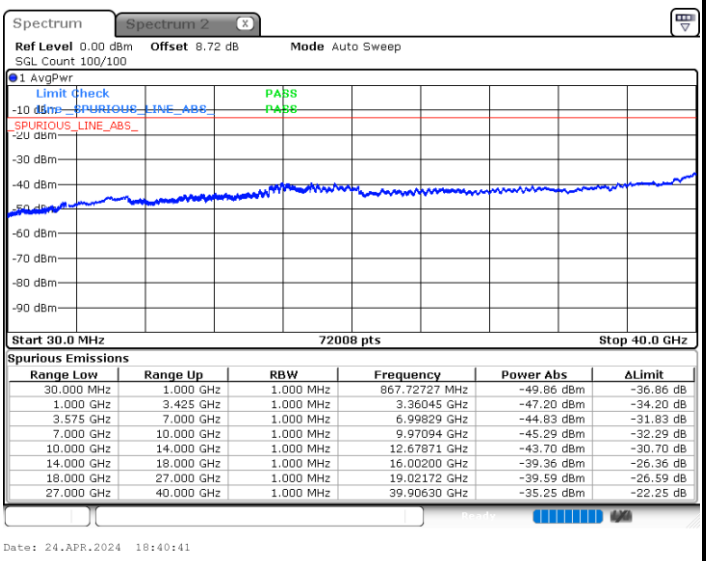

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	1.000 GHz	1.000 MHz	867.72727 MHz	-49.86 dBm	-36.86 dB
1.000 GHz	3.425 GHz	1.000 MHz	3.36045 GHz	-47.20 dBm	-34.20 dB
3.575 GHz	7.000 GHz	1.000 MHz	6.99829 GHz	-44.83 dBm	-31.83 dB
7.000 GHz	10.000 GHz	1.000 MHz	9.97094 GHz	-45.29 dBm	-32.29 dB
10.000 GHz	14.000 GHz	1.000 MHz	12.67871 GHz	-43.70 dBm	-30.70 dB
14.000 GHz	18.000 GHz	1.000 MHz	16.00200 GHz	-39.36 dBm	-26.36 dB
18.000 GHz	27.000 GHz	1.000 MHz	19.02172 GHz	-39.59 dBm	-26.59 dB
27.000 GHz	40.000 GHz	1.000 MHz	39.90630 GHz	-35.25 dBm	-22.25 dB

Date: 24.APR.2024 18:40:41

Highest Channel / QPSK

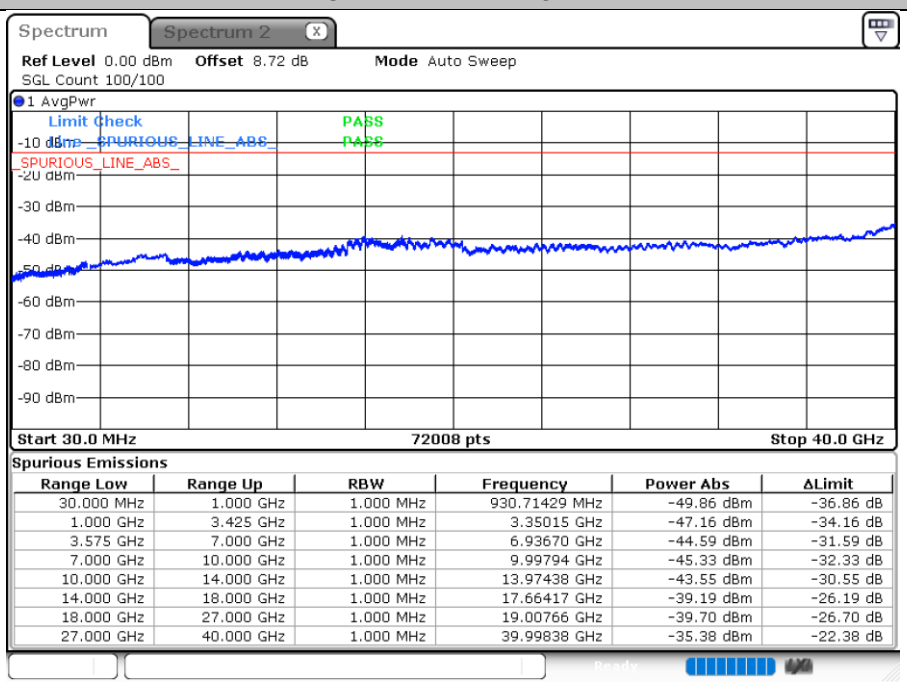

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	1.000 GHz	1.000 MHz	930.71429 MHz	-49.86 dBm	-36.86 dB
1.000 GHz	3.425 GHz	1.000 MHz	3.35015 GHz	-47.16 dBm	-34.16 dB
3.575 GHz	7.000 GHz	1.000 MHz	6.93670 GHz	-44.59 dBm	-31.59 dB
7.000 GHz	10.000 GHz	1.000 MHz	9.99794 GHz	-45.33 dBm	-32.33 dB
10.000 GHz	14.000 GHz	1.000 MHz	13.97438 GHz	-43.55 dBm	-30.55 dB
14.000 GHz	18.000 GHz	1.000 MHz	17.66417 GHz	-39.19 dBm	-26.19 dB
18.000 GHz	27.000 GHz	1.000 MHz	19.00766 GHz	-39.70 dBm	-26.70 dB
27.000 GHz	40.000 GHz	1.000 MHz	39.99838 GHz	-35.38 dBm	-22.38 dB

Date: 24.APR.2024 18:42:13

LTE Band 42 / 10MHz

Lowest Channel / QPSK

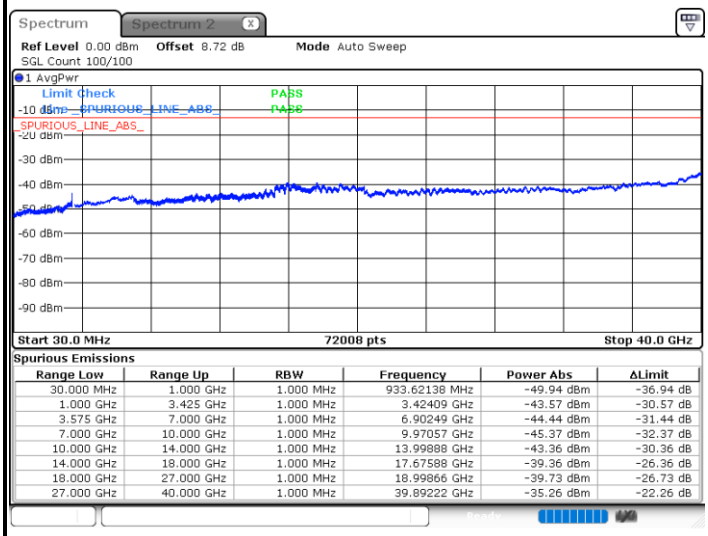

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	1.000 GHz	1.000 MHz	933.62138 MHz	-49.94 dBm	-36.94 dB
1.000 GHz	3.425 GHz	1.000 MHz	3.42409 GHz	-43.57 dBm	-30.57 dB
3.575 GHz	7.000 GHz	1.000 MHz	6.90249 GHz	-44.44 dBm	-31.44 dB
7.000 GHz	10.000 GHz	1.000 MHz	9.97057 GHz	-45.37 dBm	-32.37 dB
10.000 GHz	14.000 GHz	1.000 MHz	13.99888 GHz	-43.36 dBm	-30.36 dB
14.000 GHz	18.000 GHz	1.000 MHz	17.67588 GHz	-39.36 dBm	-26.36 dB
18.000 GHz	27.000 GHz	1.000 MHz	18.99866 GHz	-39.73 dBm	-26.73 dB
27.000 GHz	40.000 GHz	1.000 MHz	39.89222 GHz	-35.26 dBm	-22.26 dB

Date: 24.APR.2024 18:49:35

Middle Channel / QPSK

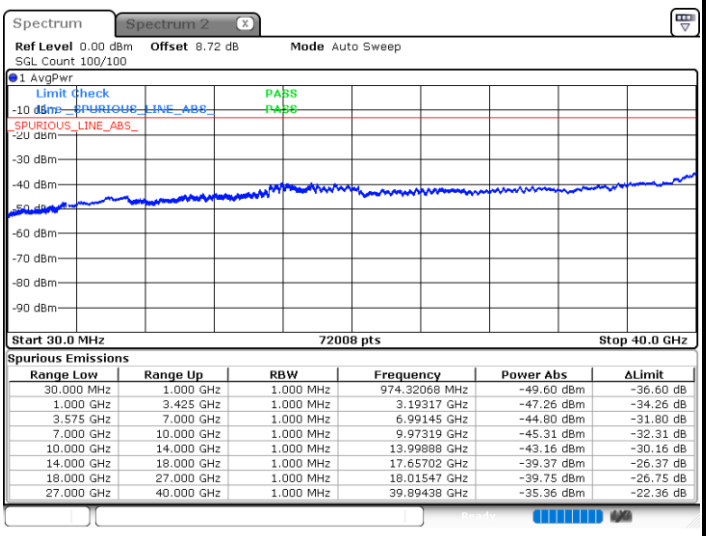

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	1.000 GHz	1.000 MHz	974.32068 MHz	-49.60 dBm	-36.60 dB
1.000 GHz	3.425 GHz	1.000 MHz	3.19317 GHz	-47.26 dBm	-34.26 dB
3.575 GHz	7.000 GHz	1.000 MHz	6.99145 GHz	-44.80 dBm	-31.80 dB
7.000 GHz	10.000 GHz	1.000 MHz	9.97319 GHz	-45.31 dBm	-32.31 dB
10.000 GHz	14.000 GHz	1.000 MHz	13.99888 GHz	-43.16 dBm	-30.16 dB
14.000 GHz	18.000 GHz	1.000 MHz	17.65702 GHz	-39.37 dBm	-26.37 dB
18.000 GHz	27.000 GHz	1.000 MHz	18.01547 GHz	-39.75 dBm	-26.75 dB
27.000 GHz	40.000 GHz	1.000 MHz	39.89438 GHz	-35.36 dBm	-22.36 dB

Date: 24.APR.2024 18:56:01

Highest Channel / QPSK

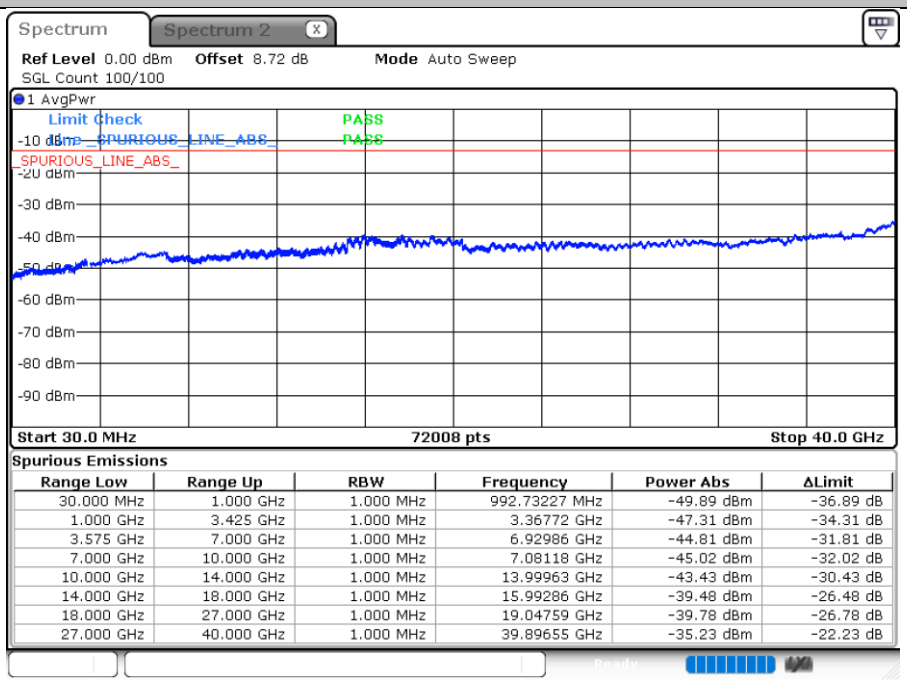

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	1.000 GHz	1.000 MHz	992.73227 MHz	-49.89 dBm	-36.89 dB
1.000 GHz	3.425 GHz	1.000 MHz	3.36772 GHz	-47.31 dBm	-34.31 dB
3.575 GHz	7.000 GHz	1.000 MHz	6.92986 GHz	-44.81 dBm	-31.81 dB
7.000 GHz	10.000 GHz	1.000 MHz	7.08118 GHz	-45.02 dBm	-32.02 dB
10.000 GHz	14.000 GHz	1.000 MHz	13.99963 GHz	-43.43 dBm	-30.43 dB
14.000 GHz	18.000 GHz	1.000 MHz	15.99286 GHz	-39.48 dBm	-26.48 dB
18.000 GHz	27.000 GHz	1.000 MHz	19.04759 GHz	-39.78 dBm	-26.78 dB
27.000 GHz	40.000 GHz	1.000 MHz	39.89655 GHz	-35.23 dBm	-22.23 dB

Date: 24.APR.2024 18:57:32

LTE Band 42 / 15MHz

Lowest Channel / QPSK

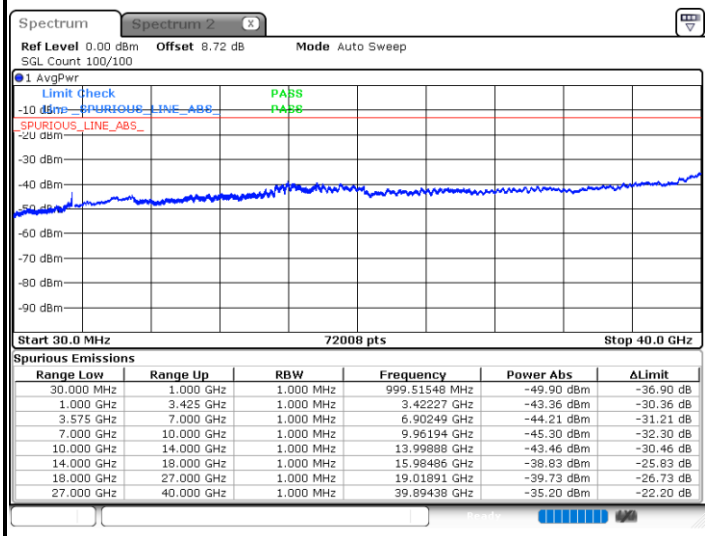

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	1.000 GHz	1.000 MHz	999.51548 MHz	-49.90 dBm	-36.90 dB
1.000 GHz	3.425 GHz	1.000 MHz	3.42227 GHz	-43.36 dBm	-30.36 dB
3.575 GHz	7.000 GHz	1.000 MHz	6.90249 GHz	-44.21 dBm	-31.21 dB
7.000 GHz	10.000 GHz	1.000 MHz	9.96194 GHz	-45.30 dBm	-32.30 dB
10.000 GHz	14.000 GHz	1.000 MHz	13.99888 GHz	-43.46 dBm	-30.46 dB
14.000 GHz	18.000 GHz	1.000 MHz	15.98486 GHz	-38.83 dBm	-25.83 dB
18.000 GHz	27.000 GHz	1.000 MHz	19.01891 GHz	-39.73 dBm	-26.73 dB
27.000 GHz	40.000 GHz	1.000 MHz	39.89438 GHz	-35.20 dBm	-22.20 dB

Date: 24.APR.2024 19:04:53

Middle Channel / QPSK

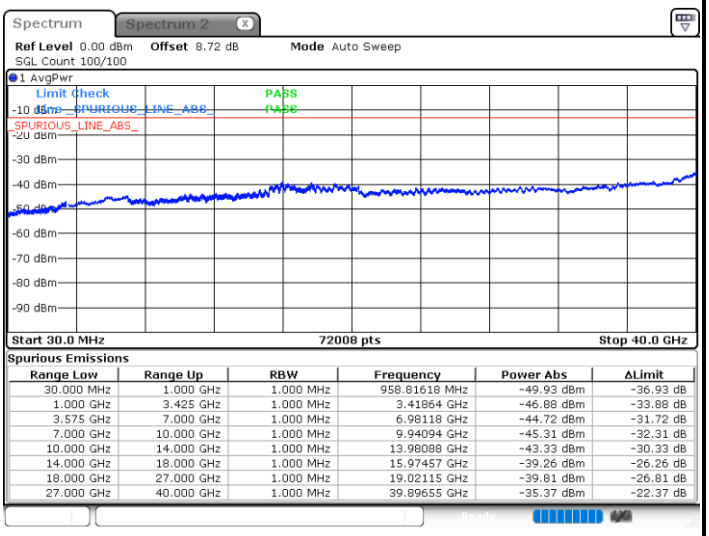

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	1.000 GHz	1.000 MHz	958.81618 MHz	-49.93 dBm	-36.93 dB
1.000 GHz	3.425 GHz	1.000 MHz	3.41864 GHz	-46.88 dBm	-33.88 dB
3.575 GHz	7.000 GHz	1.000 MHz	6.98118 GHz	-44.72 dBm	-31.72 dB
7.000 GHz	10.000 GHz	1.000 MHz	9.94094 GHz	-45.31 dBm	-32.31 dB
10.000 GHz	14.000 GHz	1.000 MHz	13.98088 GHz	-43.33 dBm	-30.33 dB
14.000 GHz	18.000 GHz	1.000 MHz	15.97457 GHz	-39.26 dBm	-26.26 dB
18.000 GHz	27.000 GHz	1.000 MHz	19.02115 GHz	-39.81 dBm	-26.81 dB
27.000 GHz	40.000 GHz	1.000 MHz	39.89655 GHz	-35.37 dBm	-22.37 dB

Date: 24.APR.2024 19:11:20

Highest Channel / QPSK

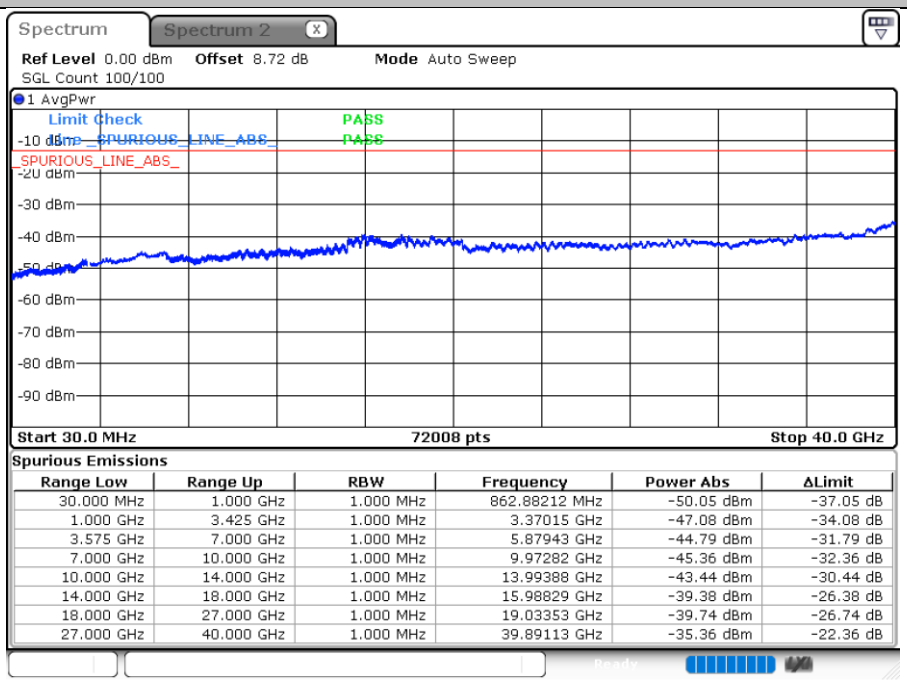

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	1.000 GHz	1.000 MHz	862.88212 MHz	-50.05 dBm	-37.05 dB
1.000 GHz	3.425 GHz	1.000 MHz	3.37015 GHz	-47.08 dBm	-34.08 dB
3.575 GHz	7.000 GHz	1.000 MHz	5.87943 GHz	-44.79 dBm	-31.79 dB
7.000 GHz	10.000 GHz	1.000 MHz	9.97282 GHz	-45.36 dBm	-32.36 dB
10.000 GHz	14.000 GHz	1.000 MHz	13.99388 GHz	-43.44 dBm	-30.44 dB
14.000 GHz	18.000 GHz	1.000 MHz	15.98829 GHz	-39.38 dBm	-26.38 dB
18.000 GHz	27.000 GHz	1.000 MHz	19.03353 GHz	-39.74 dBm	-26.74 dB
27.000 GHz	40.000 GHz	1.000 MHz	39.89113 GHz	-35.36 dBm	-22.36 dB

Date: 24.APR.2024 19:12:51

LTE Band 42 / 20MHz

Lowest Channel / QPSK

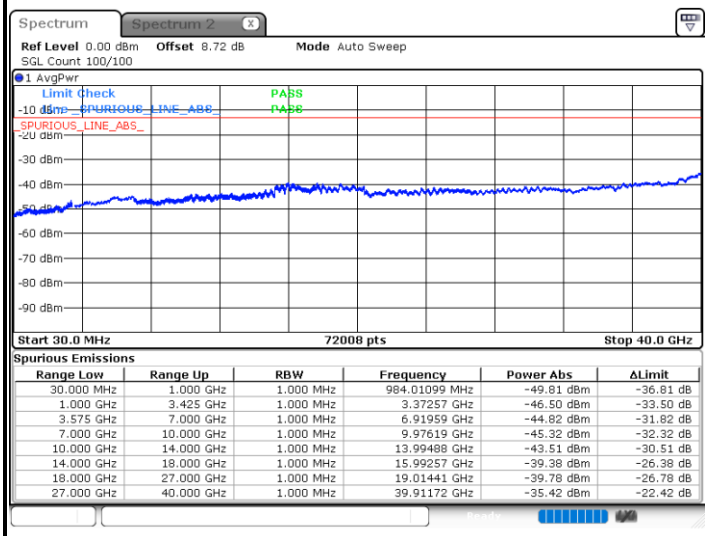

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	1.000 GHz	1.000 MHz	984.01099 MHz	-49.81 dBm	-36.81 dB
1.000 GHz	3.425 GHz	1.000 MHz	3.37257 GHz	-46.50 dBm	-33.50 dB
3.575 GHz	7.000 GHz	1.000 MHz	6.91959 GHz	-44.82 dBm	-31.82 dB
7.000 GHz	10.000 GHz	1.000 MHz	9.97619 GHz	-45.32 dBm	-32.32 dB
10.000 GHz	14.000 GHz	1.000 MHz	13.99488 GHz	-43.51 dBm	-30.51 dB
14.000 GHz	18.000 GHz	1.000 MHz	15.99257 GHz	-39.38 dBm	-26.38 dB
18.000 GHz	27.000 GHz	1.000 MHz	19.01441 GHz	-39.78 dBm	-26.78 dB
27.000 GHz	40.000 GHz	1.000 MHz	39.91172 GHz	-35.42 dBm	-22.42 dB

Date: 24.APR.2024 19:20:13

Middle Channel / QPSK

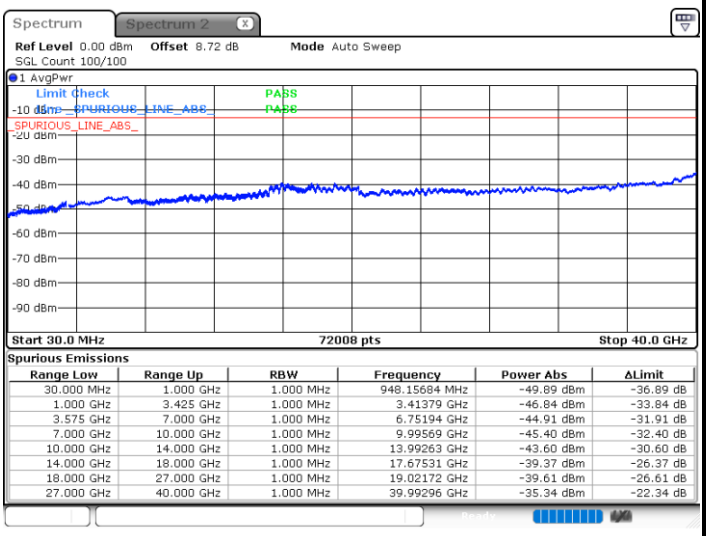

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	1.000 GHz	1.000 MHz	948.15684 MHz	-49.89 dBm	-36.89 dB
1.000 GHz	3.425 GHz	1.000 MHz	3.41379 GHz	-46.84 dBm	-33.84 dB
3.575 GHz	7.000 GHz	1.000 MHz	6.75194 GHz	-44.91 dBm	-31.91 dB
7.000 GHz	10.000 GHz	1.000 MHz	9.99569 GHz	-45.40 dBm	-32.40 dB
10.000 GHz	14.000 GHz	1.000 MHz	13.99263 GHz	-43.60 dBm	-30.60 dB
14.000 GHz	18.000 GHz	1.000 MHz	17.67531 GHz	-39.37 dBm	-26.37 dB
18.000 GHz	27.000 GHz	1.000 MHz	19.02172 GHz	-39.61 dBm	-26.61 dB
27.000 GHz	40.000 GHz	1.000 MHz	39.99296 GHz	-35.34 dBm	-22.34 dB

Date: 24.APR.2024 19:26:39

Highest Channel / QPSK

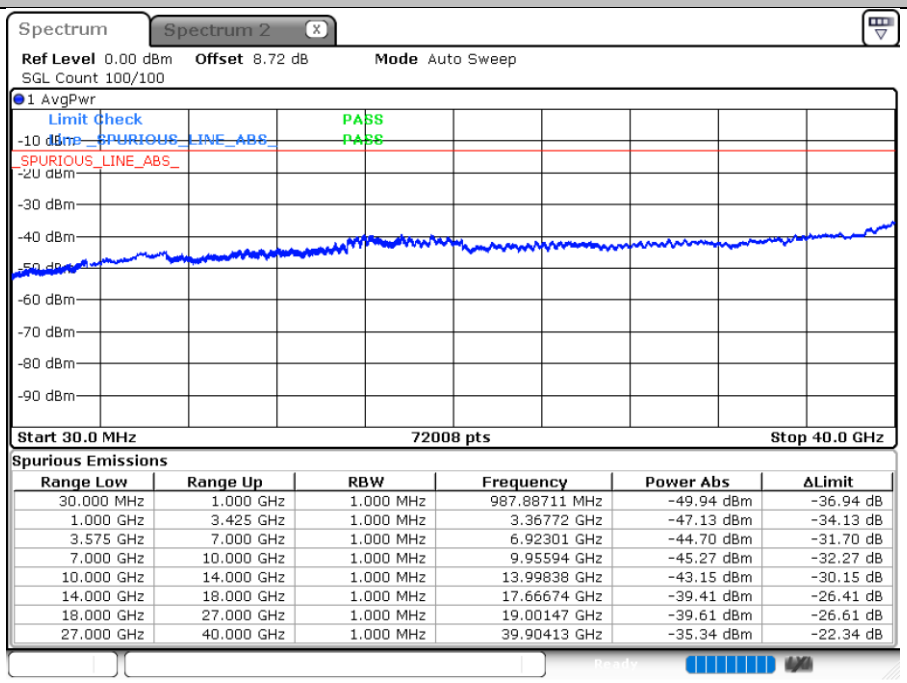

Spurious Emissions

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
30.000 MHz	1.000 GHz	1.000 MHz	987.88711 MHz	-49.94 dBm	-36.94 dB
1.000 GHz	3.425 GHz	1.000 MHz	3.36772 GHz	-47.13 dBm	-34.13 dB
3.575 GHz	7.000 GHz	1.000 MHz	6.92301 GHz	-44.70 dBm	-31.70 dB
7.000 GHz	10.000 GHz	1.000 MHz	9.95594 GHz	-45.27 dBm	-32.27 dB
10.000 GHz	14.000 GHz	1.000 MHz	13.99838 GHz	-43.15 dBm	-30.15 dB
14.000 GHz	18.000 GHz	1.000 MHz	17.66674 GHz	-39.41 dBm	-26.41 dB
18.000 GHz	27.000 GHz	1.000 MHz	19.00147 GHz	-39.61 dBm	-26.61 dB
27.000 GHz	40.000 GHz	1.000 MHz	39.90413 GHz	-35.34 dBm	-22.34 dB

Date: 24.APR.2024 19:28:11

Frequency Stability

Test Conditions		LTE Band 42(QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0031	PASS
40	Normal Voltage	0.0029	
30	Normal Voltage	0.0046	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0044	
0	Normal Voltage	0.0013	
-10	Normal Voltage	0.0063	
-20	Normal Voltage	0.0067	
-30	Normal Voltage	0.0054	
20	Maximum Voltage	0.0058	
20	Normal Voltage	0.0016	
20	Battery End Point	0.0008	

Note:

1. Normal Voltage =3.91 V. ; Battery End Point (BEP) =3.4 V. ; Maximum Voltage =4.48 V.
2. Note: The frequency fundamental emissions stay within the authorized frequency block.

Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Reid Huang	Temperature :	22~25℃
		Relative Humidity :	48~52%

LTE Band 42 / 20MHz / QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	6982.00	-60.90	-13	-47.90	-56.51	-64.20	8.30	11.60	H
	10473.00	-54.88	-13	-41.88	-56.07	-56.40	10.48	12.00	H
	13964.00	-52.60	-13	-39.60	-58.79	-54.30	11.80	13.50	H
	6982.00	-59.44	-13	-46.44	-55.21	-62.74	8.30	11.60	V
	10473.00	-54.82	-13	-41.82	-55.93	-56.34	10.48	12.00	V
	13964.00	-52.65	-13	-39.65	-58.47	-54.35	11.80	13.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.