

Appendix A. Test Result of AC Power Line Conducted Emission

For Adapter

TX 915.000 MHz Line

Site :HY-SR01
Condition :Line
Mode :TX 915MHz
test by :Neko

Level (dBuV)

100
87.5
75.0
62.5
50.0
37.5
25.0
12.5
0

0.15 0.2 0.5 1 2 5 10 20 30

Frequency (MHz)

Conduction(QP)
Conduction(AV)

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.158	57.81	65.57	-7.76	48.24	9.57	QP
2	0.158	38.76	55.57	-16.81	29.19	9.57	Average
3	0.296	47.67	60.36	-12.69	38.09	9.58	QP
4	0.296	29.41	58.36	-28.95	19.83	9.58	Average
5	0.459	38.40	56.71	-18.31	28.81	9.59	QP
6	0.459	24.11	46.71	-22.60	14.52	9.59	Average
7	0.661	28.95	56.00	-27.05	19.34	9.61	QP
8	0.661	12.40	46.00	-33.60	2.79	9.61	Average
9	5.311	25.20	60.00	-34.80	15.13	10.07	QP
10	5.311	17.54	50.00	-32.46	7.47	10.07	Average
11	23.280	28.24	60.00	-31.76	18.38	9.86	QP
12	23.280	24.64	50.00	-25.36	14.78	9.86	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

TX 915.000MHz Neutral

Site :HY-SR01
Condition :Neutral
Mode :TX 915MHz
test by :Neko

Level (dBuV)

100
87.5
75.0
62.5
50.0
37.5
25.0
12.5
0

0.15 0.2 0.5 1 2 5 10 20 30

Frequency (MHz)


Conduction(QP)
Conduction(AV)

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.160	58.15	65.48	-7.33	48.59	9.56	QP
2	0.160	38.77	55.48	-16.71	29.21	9.56	Average
3	0.325	48.10	59.57	-11.47	38.52	9.58	QP
4	0.325	28.14	49.57	-21.43	18.56	9.58	Average
5	0.455	37.44	56.78	-19.34	27.85	9.59	QP
6	0.455	22.57	46.78	-24.21	12.98	9.59	Average
7	0.659	28.46	56.00	-27.54	18.85	9.61	QP
8	0.659	12.56	46.00	-33.44	2.95	9.61	Average
9	5.718	22.60	60.00	-37.40	12.50	10.10	QP
10	5.718	14.73	50.00	-35.27	4.63	10.10	Average
11	15.160	31.98	60.00	-28.02	22.13	9.85	QP
12	15.160	25.40	50.00	-24.60	15.55	9.85	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

For PoE


TX 915.000 MHz Line

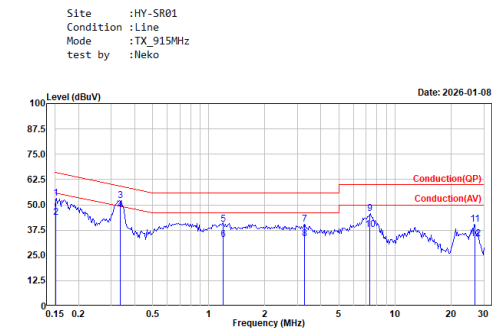

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.151	53.13	65.96	-12.83	43.56	9.57	QP
2	0.151	43.96	55.96	-12.00	34.39	9.57	Average
3	0.335	52.84	59.34	-7.30	42.46	9.58	QP
4	0.335	47.65	49.34	-1.69	38.07	9.58	Average
5	1.196	40.32	56.00	-15.68	30.68	9.64	QP
6	1.196	32.96	46.00	-13.04	23.32	9.64	Average
7	3.270	40.37	56.00	-15.63	30.49	9.88	QP
8	3.270	33.14	46.00	-12.86	23.26	9.88	Average
9	7.305	45.76	60.00	-14.24	35.64	10.12	QP
10	7.305	37.69	50.00	-12.31	27.57	10.12	Average
11	26.841	40.26	60.00	-19.74	30.45	9.81	QP
12	26.841	33.26	50.00	-16.74	23.45	9.81	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

TX 915.000 MHz Neutral

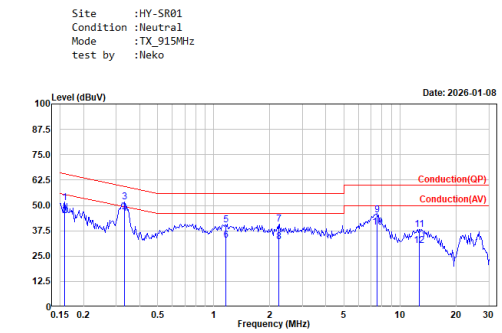


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.158	51.39	65.55	-14.16	41.83	9.56	QP
2	0.158	44.80	55.55	-10.75	35.24	9.56	Average
3	0.332	51.52	59.40	-7.88	41.94	9.58	QP
4	0.332	45.96	49.40	-3.44	36.38	9.58	Average
5	1.161	40.29	56.00	-15.71	30.65	9.64	QP
6	1.161	33.01	46.00	-12.99	23.37	9.64	Average
7	2.239	40.63	56.00	-15.37	30.89	9.74	QP
8	2.239	32.06	46.00	-13.94	22.32	9.74	Average
9	7.513	45.38	60.00	-14.62	35.22	10.16	QP
10	7.513	39.27	50.00	-10.73	29.11	10.16	Average
11	12.627	38.16	60.00	-21.84	28.13	10.03	QP
12	12.627	30.23	50.00	-19.77	20.20	10.03	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Appendix B. Test Result of 20dB Bandwidth


Modulation	Frequency (MHz)	Measure Level (kHz)	Limit (kHz)
FHSS	902.106	48.0	-
	915.000	48.0	-
	927.398	48.0	-

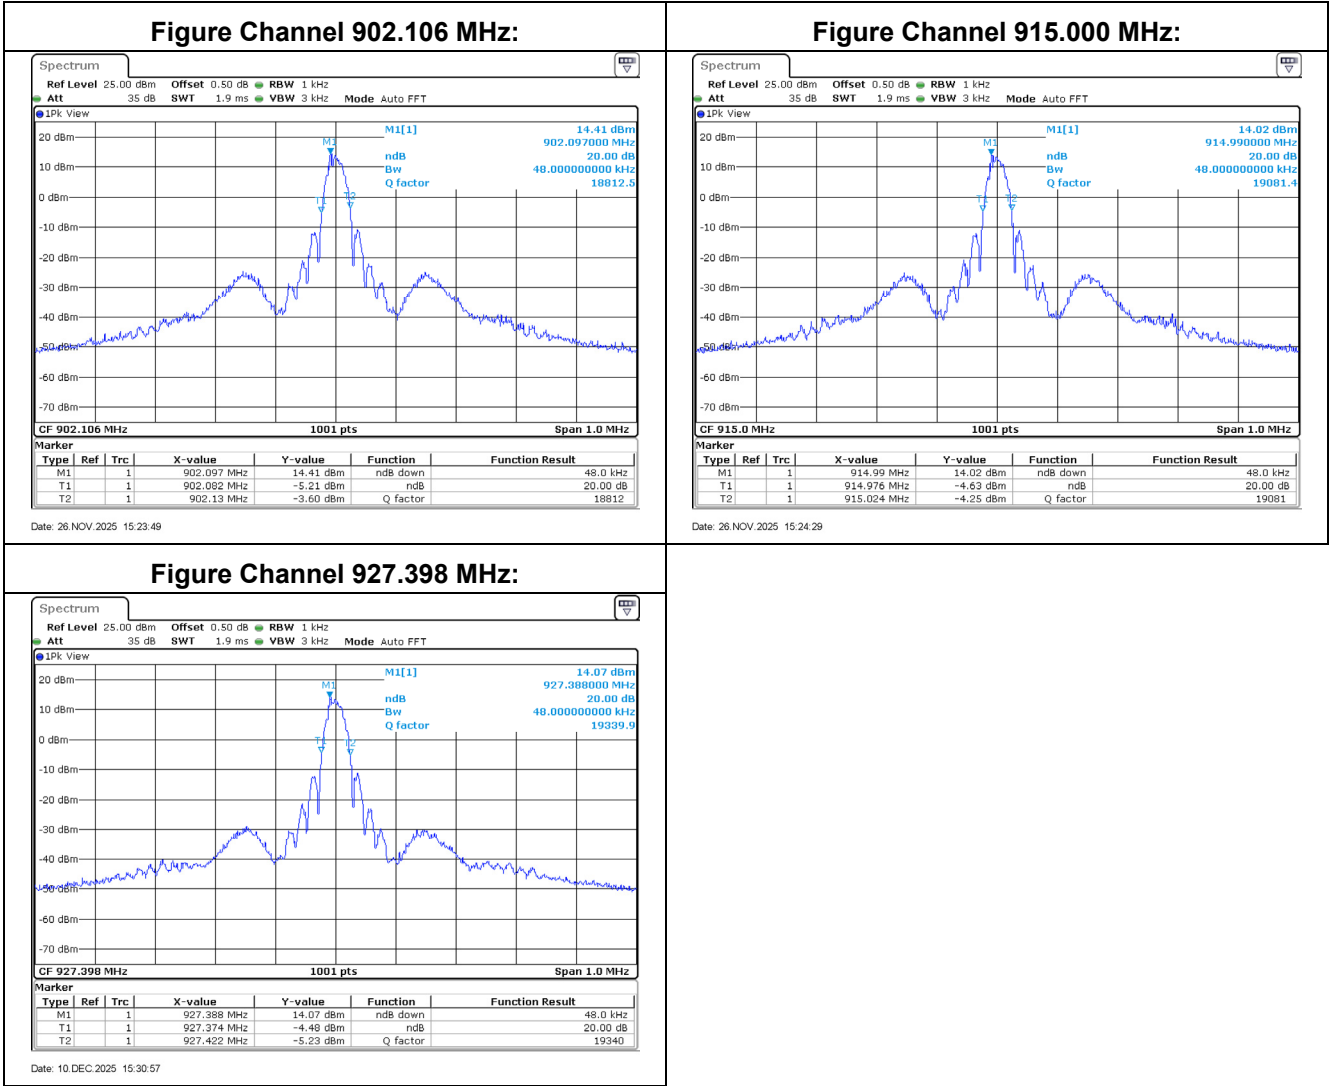

Appendix C. Test Result of Carrier Frequency Separation


Modulation	Frequency (MHz)	Measure Level (kHz)	Limit (kHz)	Limit of 20dB Bandwidth (kHz)
FHSS	902.106	79.9	>25	48.0
	915.000	79.9	>25	48.0
	927.398	95.9	>25	48.0

Figure Channel 902.106 MHz:

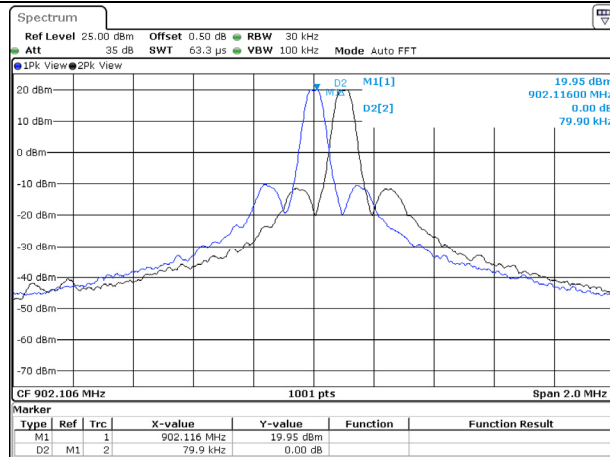


Date: 26 NOV 2025 15:43:44

Figure Channel 915.000 MHz:

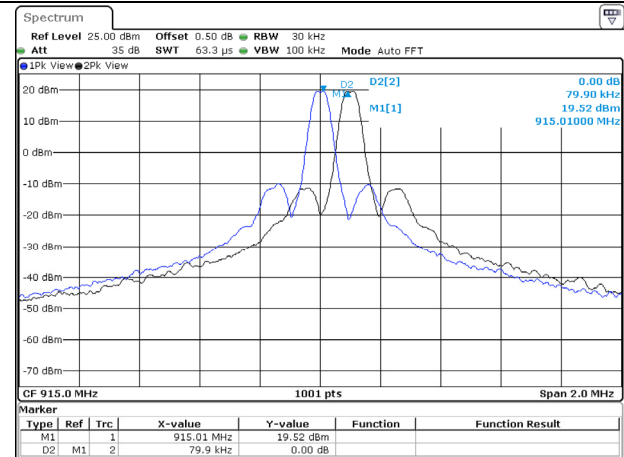

Date: 26 NOV 2025 15:44:37

Figure Channel 927.398 MHz:

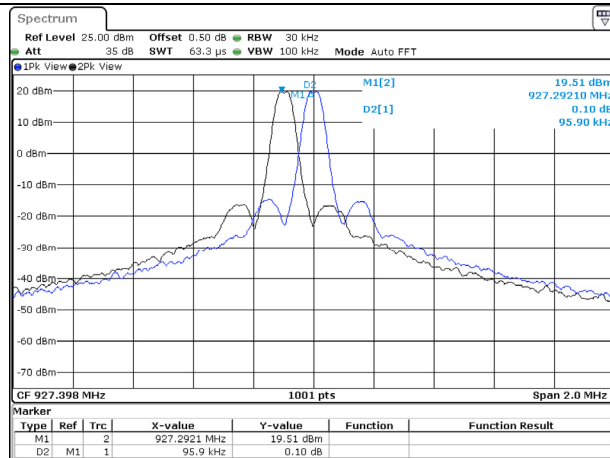


Date: 10 DEC 2025 15:47:30

Appendix D. Test Result of Maximum Peak Conducted Output Power

Modulation	Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)	Limit (dBm)
FHSS	902.106	19.99	28
	915.000	20.28	28
	927.398	19.97	28

Modulation	Frequency Range (MHz)	Measure Level (Channels)	Limit (Channels)
FHSS	902.106 – 927.398	256	≥ 50

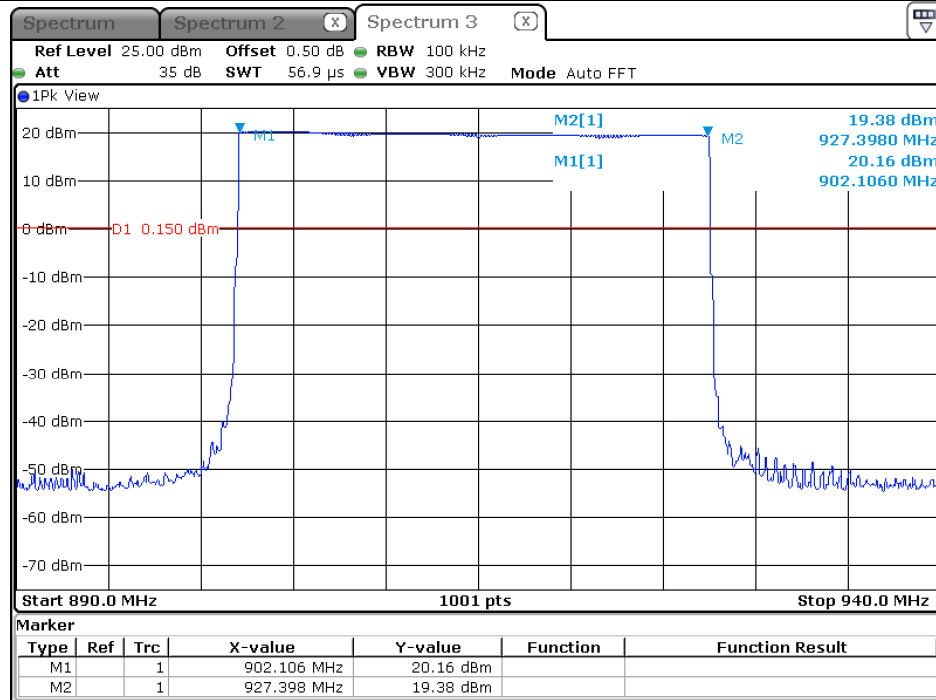


Date: 26.NOV.2025 16:06:42

Appendix F. Test Result of Dwell Time

Modulation	Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Dwell Time (ms)	Limit (ms)
FHSS	902.106	7.200	5	20000	36.000	400
	915.000	7.200	5	20000	36.000	400
	927.398	7.000	2	20000	14.000	400


Note: Dwell time = Time slot length * Hopping of Number

CH 902.106 MHz Time slot length:

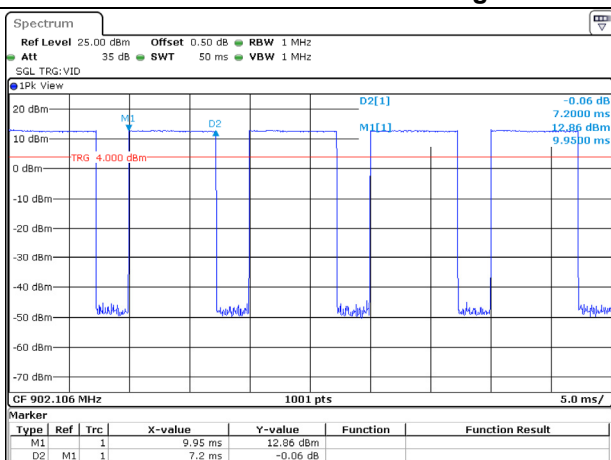


Date: 26 NOV 2025 15:48:22

CH 902.106 MHz Time slot length:

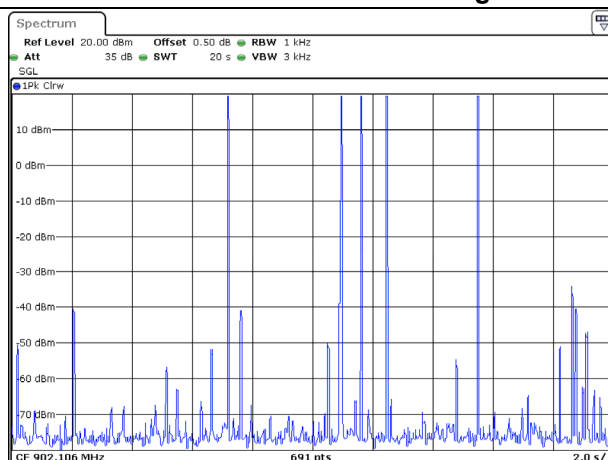


Date: 8 JAN 2026 18:15:26

CH 915 MHz Time slot length:

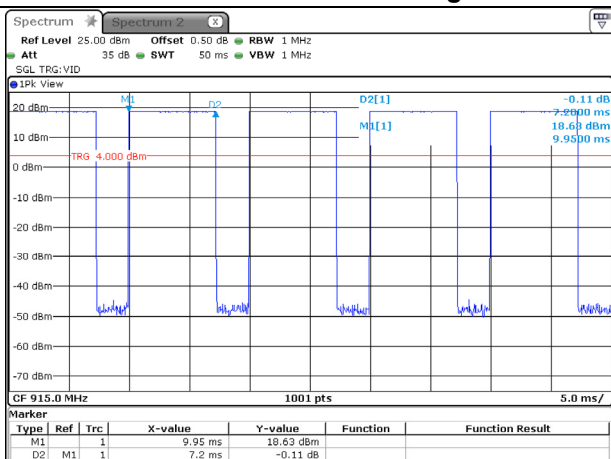


Date: 26 NOV 2025 15:56:12


CH 915 MHz Time slot length:

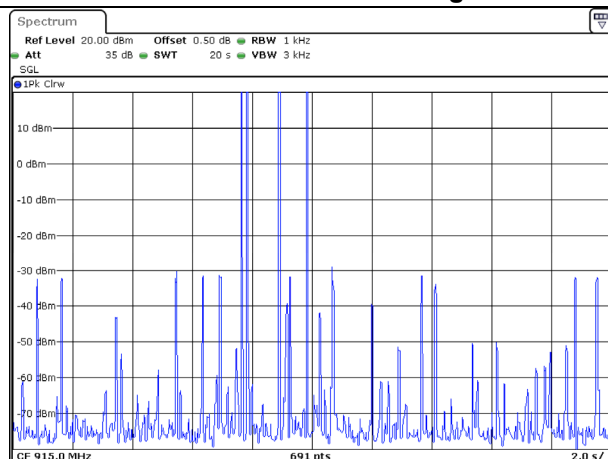

Date: 8 JAN 2026 18:17:51


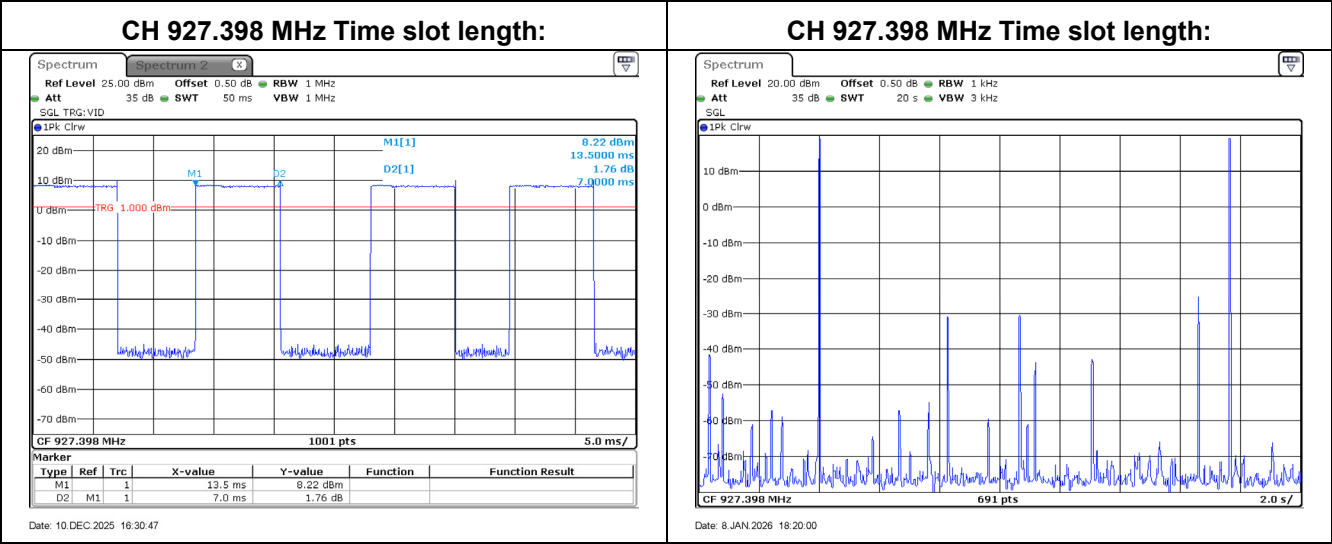




Appendix G. Test Result of Antenna Port Conducted Emission

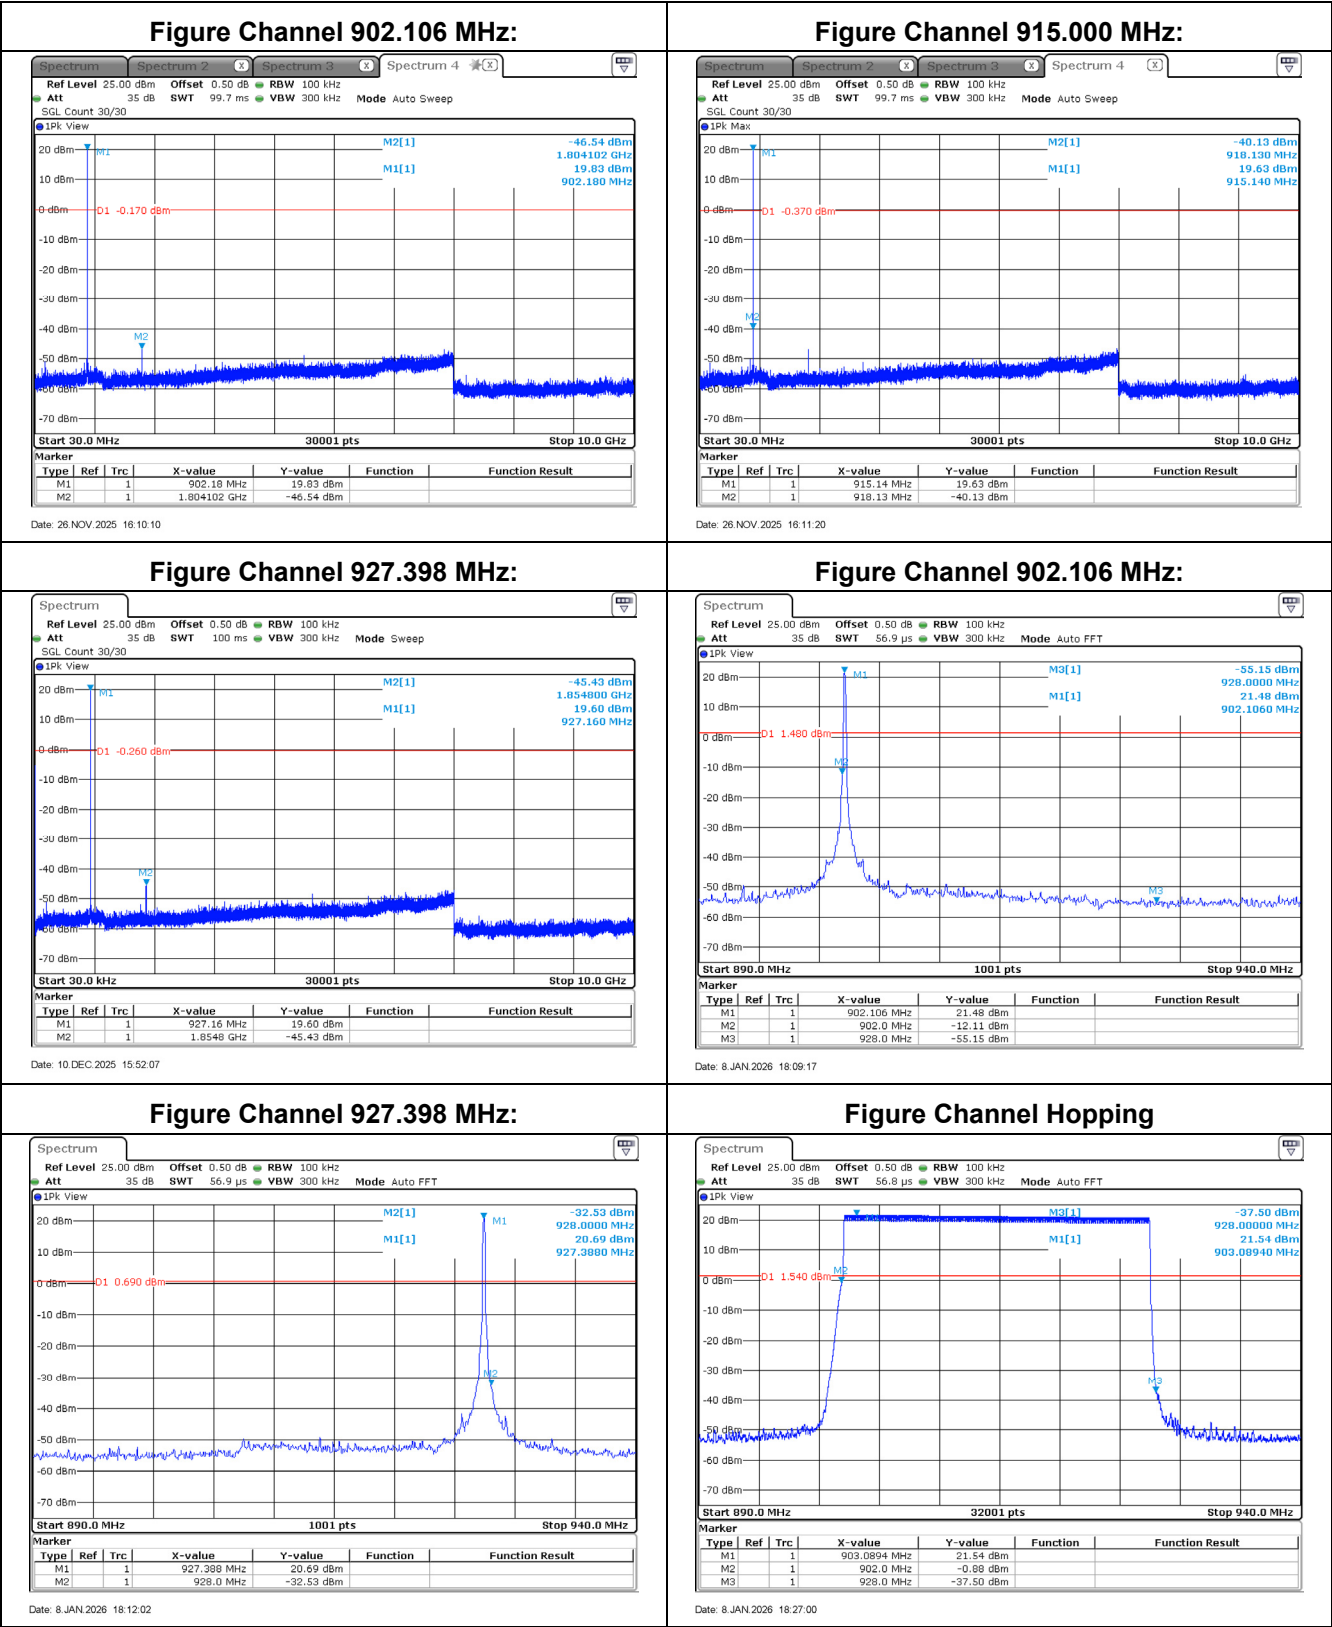

Appendix H. Test Result of Radiated Emission

Dipole

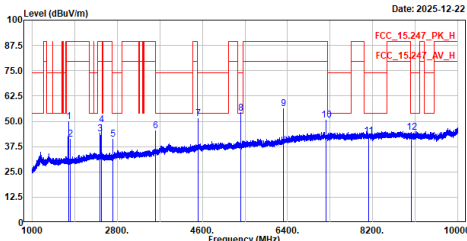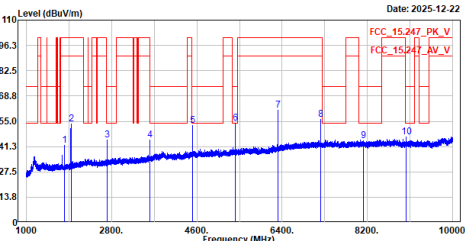TX 902.106MHz H							TX 902.106MHz V								
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_902.106MHz Test BY :Ashton							Site :HY-CB03 Condition :3m ,Vertical Mode :TX_902.106MHz Test BY :Ashton								
															
No.	Frequency	Level	Limit	Over	Read	Factor	Remark	No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1767.021	49.72	89.44	-39.72	75.08	-25.36	Peak	1	1804.212	41.75	100.55	-58.80	67.12	-25.37	Peak
2	1804.212	41.12	89.44	-48.32	66.49	-25.37	Peak	2	1953.276	53.62	100.55	-46.93	78.28	-24.66	Peak
3	2430.290	43.84	89.44	-45.60	67.52	-23.68	Peak	3	2706.318	44.99	74.00	-29.01	67.88	-22.89	Peak
4	2458.791	48.45	89.44	-40.99	72.16	-23.71	Peak	4	3608.424	44.92	74.00	-29.08	65.16	-20.24	Peak
5	2706.318	40.98	74.00	-33.02	63.87	-22.89	Peak	5	4510.530	52.74	74.00	-21.26	68.99	-16.25	Peak
6	3608.424	45.12	74.00	-28.88	65.36	-20.24	Peak	6	5412.636	53.85	74.00	-20.15	67.20	-13.35	Peak
7	4510.530	51.38	74.00	-22.62	67.63	-16.25	Peak	7	6314.742	60.91	100.55	-39.64	70.29	-9.38	Peak
8	5412.636	54.14	74.00	-19.86	67.49	-13.35	Peak	8	7216.848	56.09	100.55	-44.46	63.34	-7.25	Peak
9	6314.742	56.05	89.44	-33.39	65.43	-9.38	Peak	9	8118.954	44.46	74.00	-29.54	52.03	-7.57	Peak
10	7216.848	50.40	89.44	-39.04	57.65	-7.25	Peak	10	9021.060	46.53	74.00	-27.47	53.37	-6.84	Peak
11	8118.954	42.63	74.00	-31.37	50.20	-7.57	Peak								
12	9021.060	44.60	74.00	-29.40	51.44	-6.84	Peak								
Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.							Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.								

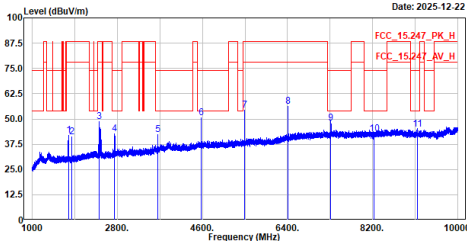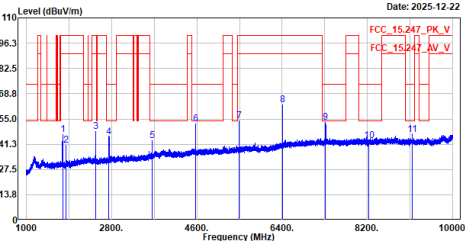
TX 915.000MHz H							TX 915.000MHz V								
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_915MHz Test BY :Ashton							Site :HY-CB03 Condition :3m ,Vertical Mode :TX_915MHz Test BY :Ashton								
															
No.	Frequency	Level	Limit	Over	Read	Factor	Remark	No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1769.271	42.02	88.30	-46.28	67.38	-25.36	Peak	1	1767.021	46.54	100.53	-53.99	71.90	-25.36	Peak
2	1830.000	41.20	88.30	-47.10	66.47	-25.27	Peak	2	1830.000	40.70	100.53	-59.83	65.97	-25.27	Peak
3	2415.039	40.58	88.30	-39.72	72.15	-23.57	Peak	3	2463.041	48.06	100.53	-52.47	71.80	-23.74	Peak
4	2745.000	42.50	74.00	-31.50	65.22	-22.72	Peak	4	2745.000	45.45	74.00	-28.55	68.17	-22.72	Peak
5	3660.000	42.42	74.00	-31.58	62.18	-19.76	Peak	5	3660.000	43.08	74.00	-30.92	62.84	-19.76	Peak
6	4575.000	50.48	74.00	-23.52	66.48	-16.00	Peak	6	4575.000	52.46	74.00	-21.54	68.46	-16.00	Peak
7	5490.000	54.22	88.30	-34.08	67.43	-13.21	Peak	7	5490.000	53.94	100.53	-46.59	67.15	-13.21	Peak
8	6405.000	56.11	88.30	-32.19	64.83	-8.72	Peak	8	6405.000	62.72	100.53	-37.81	71.44	-8.72	Peak
9	7320.000	48.03	74.00	-25.97	54.95	-6.92	Peak	9	7320.000	53.26	74.00	-20.74	60.18	-6.92	Peak
10	8235.000	42.82	74.00	-31.18	50.23	-7.41	Peak	10	8235.000	43.24	74.00	-30.76	50.65	-7.41	Peak
11	9150.000	44.98	74.00	-29.02	51.89	-6.91	Peak	11	9150.000	46.66	74.00	-27.34	53.57	-6.91	Peak
Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.							Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.								

TX_927.398MHz_H				TX_927.398MHz_V																																																																																																																																																																																																											
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_927.398MHz Test BY :Ashton				Site :HY-CB03 Condition :3m ,Vertical Mode :TX_927.398MHz Test BY :Ashton																																																																																																																																																																																																											
Level (dBuV/m) Date: 2025-12-22				Level (dBuV/m) Date: 2025-12-22																																																																																																																																																																																																											
<table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>1854.796</td><td>42.73</td><td>88.40</td><td>-45.67</td><td>67.86</td><td>-25.13</td><td>Peak</td></tr><tr><td>2</td><td>2421.290</td><td>47.94</td><td>88.40</td><td>-40.46</td><td>71.52</td><td>-23.58</td><td>Peak</td></tr><tr><td>3</td><td>2448.040</td><td>47.83</td><td>88.40</td><td>-40.57</td><td>71.63</td><td>-23.80</td><td>Peak</td></tr><tr><td>4</td><td>2782.194</td><td>44.06</td><td>74.00</td><td>-29.94</td><td>66.43</td><td>-22.37</td><td>Peak</td></tr><tr><td>5</td><td>3789.592</td><td>42.11</td><td>74.00</td><td>-31.89</td><td>61.40</td><td>-19.29</td><td>Peak</td></tr><tr><td>6</td><td>4636.990</td><td>48.53</td><td>74.00</td><td>-25.47</td><td>64.22</td><td>-15.69</td><td>Peak</td></tr><tr><td>7</td><td>5564.388</td><td>55.42</td><td>88.40</td><td>-32.98</td><td>68.10</td><td>-12.68</td><td>Peak</td></tr><tr><td>8</td><td>6491.786</td><td>56.99</td><td>88.40</td><td>-31.41</td><td>65.45</td><td>-8.46</td><td>Peak</td></tr><tr><td>9</td><td>7419.184</td><td>47.91</td><td>74.00</td><td>-26.09</td><td>54.87</td><td>-6.96</td><td>Peak</td></tr><tr><td>10</td><td>8346.582</td><td>41.75</td><td>74.00</td><td>-32.25</td><td>48.97</td><td>-7.22</td><td>Peak</td></tr><tr><td>11</td><td>9273.980</td><td>44.57</td><td>88.40</td><td>-43.83</td><td>51.50</td><td>-6.93</td><td>Peak</td></tr></table>				No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	1854.796	42.73	88.40	-45.67	67.86	-25.13	Peak	2	2421.290	47.94	88.40	-40.46	71.52	-23.58	Peak	3	2448.040	47.83	88.40	-40.57	71.63	-23.80	Peak	4	2782.194	44.06	74.00	-29.94	66.43	-22.37	Peak	5	3789.592	42.11	74.00	-31.89	61.40	-19.29	Peak	6	4636.990	48.53	74.00	-25.47	64.22	-15.69	Peak	7	5564.388	55.42	88.40	-32.98	68.10	-12.68	Peak	8	6491.786	56.99	88.40	-31.41	65.45	-8.46	Peak	9	7419.184	47.91	74.00	-26.09	54.87	-6.96	Peak	10	8346.582	41.75	74.00	-32.25	48.97	-7.22	Peak	11	9273.980	44.57	88.40	-43.83	51.50	-6.93	Peak	<table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>1854.796</td><td>42.63</td><td>99.35</td><td>-56.72</td><td>67.76</td><td>-25.13</td><td>Peak</td></tr><tr><td>2</td><td>2450.540</td><td>39.82</td><td>99.35</td><td>-59.53</td><td>63.61</td><td>-23.79</td><td>Peak</td></tr><tr><td>3</td><td>2782.194</td><td>46.79</td><td>74.00</td><td>-27.21</td><td>69.16</td><td>-22.37</td><td>Peak</td></tr><tr><td>4</td><td>3789.592</td><td>43.27</td><td>74.00</td><td>-30.73</td><td>62.56</td><td>-19.29</td><td>Peak</td></tr><tr><td>5</td><td>4636.990</td><td>53.88</td><td>74.00</td><td>-20.12</td><td>69.57</td><td>-15.69</td><td>Peak</td></tr><tr><td>6</td><td>5564.388</td><td>53.60</td><td>99.35</td><td>-45.75</td><td>66.28</td><td>-12.68</td><td>Peak</td></tr><tr><td>7</td><td>6491.786</td><td>61.77</td><td>99.35</td><td>-37.58</td><td>70.23</td><td>-8.46</td><td>Peak</td></tr><tr><td>8</td><td>7419.184</td><td>50.27</td><td>74.00</td><td>-23.73</td><td>57.23</td><td>-6.96</td><td>Peak</td></tr><tr><td>9</td><td>8346.582</td><td>45.96</td><td>74.00</td><td>-28.04</td><td>53.18</td><td>-7.22</td><td>Peak</td></tr><tr><td>10</td><td>9273.980</td><td>46.20</td><td>99.35</td><td>-53.15</td><td>53.13</td><td>-6.93</td><td>Peak</td></tr></table>				No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	1854.796	42.63	99.35	-56.72	67.76	-25.13	Peak	2	2450.540	39.82	99.35	-59.53	63.61	-23.79	Peak	3	2782.194	46.79	74.00	-27.21	69.16	-22.37	Peak	4	3789.592	43.27	74.00	-30.73	62.56	-19.29	Peak	5	4636.990	53.88	74.00	-20.12	69.57	-15.69	Peak	6	5564.388	53.60	99.35	-45.75	66.28	-12.68	Peak	7	6491.786	61.77	99.35	-37.58	70.23	-8.46	Peak	8	7419.184	50.27	74.00	-23.73	57.23	-6.96	Peak	9	8346.582	45.96	74.00	-28.04	53.18	-7.22	Peak	10	9273.980	46.20	99.35	-53.15	53.13	-6.93	Peak
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																																																																																																									
1	1854.796	42.73	88.40	-45.67	67.86	-25.13	Peak																																																																																																																																																																																																								
2	2421.290	47.94	88.40	-40.46	71.52	-23.58	Peak																																																																																																																																																																																																								
3	2448.040	47.83	88.40	-40.57	71.63	-23.80	Peak																																																																																																																																																																																																								
4	2782.194	44.06	74.00	-29.94	66.43	-22.37	Peak																																																																																																																																																																																																								
5	3789.592	42.11	74.00	-31.89	61.40	-19.29	Peak																																																																																																																																																																																																								
6	4636.990	48.53	74.00	-25.47	64.22	-15.69	Peak																																																																																																																																																																																																								
7	5564.388	55.42	88.40	-32.98	68.10	-12.68	Peak																																																																																																																																																																																																								
8	6491.786	56.99	88.40	-31.41	65.45	-8.46	Peak																																																																																																																																																																																																								
9	7419.184	47.91	74.00	-26.09	54.87	-6.96	Peak																																																																																																																																																																																																								
10	8346.582	41.75	74.00	-32.25	48.97	-7.22	Peak																																																																																																																																																																																																								
11	9273.980	44.57	88.40	-43.83	51.50	-6.93	Peak																																																																																																																																																																																																								
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																																																																																																									
1	1854.796	42.63	99.35	-56.72	67.76	-25.13	Peak																																																																																																																																																																																																								
2	2450.540	39.82	99.35	-59.53	63.61	-23.79	Peak																																																																																																																																																																																																								
3	2782.194	46.79	74.00	-27.21	69.16	-22.37	Peak																																																																																																																																																																																																								
4	3789.592	43.27	74.00	-30.73	62.56	-19.29	Peak																																																																																																																																																																																																								
5	4636.990	53.88	74.00	-20.12	69.57	-15.69	Peak																																																																																																																																																																																																								
6	5564.388	53.60	99.35	-45.75	66.28	-12.68	Peak																																																																																																																																																																																																								
7	6491.786	61.77	99.35	-37.58	70.23	-8.46	Peak																																																																																																																																																																																																								
8	7419.184	50.27	74.00	-23.73	57.23	-6.96	Peak																																																																																																																																																																																																								
9	8346.582	45.96	74.00	-28.04	53.18	-7.22	Peak																																																																																																																																																																																																								
10	9273.980	46.20	99.35	-53.15	53.13	-6.93	Peak																																																																																																																																																																																																								
Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.				Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.																																																																																																																																																																																																											

For Adapter

TX_902.106MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_902.106MHz
Test BY :Rock

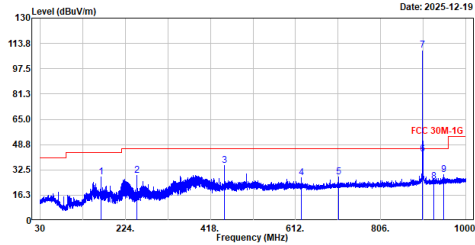


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	168.031	28.03	43.50	-15.47	52.45	-24.42	QP
2	249.996	29.14	46.00	-16.86	54.15	-25.01	QP
3	450.010	35.35	46.00	-10.65	54.48	-19.13	QP
4	625.095	27.58	46.00	-18.42	42.93	-15.35	QP
5	710.164	27.82	46.00	-18.18	41.94	-14.12	QP
6	902.000	42.85	46.00	-3.15	54.59	-11.74	QP
7	902.106	109.44	-----	-----	121.18	-11.74	QP
8	928.000	24.81	46.00	-21.19	36.01	-11.20	QP
9	950.239	29.36	46.00	-16.64	40.18	-10.82	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_902.106MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_902.106MHz
Test BY :Rock

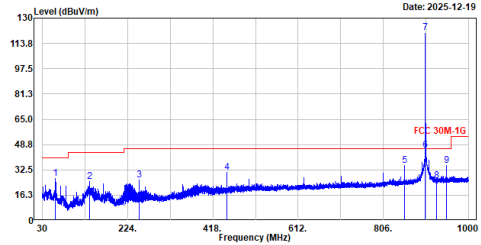


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	59.973	26.87	40.00	-13.13	51.14	-24.27	QP
2	136.894	24.82	43.50	-18.68	49.69	-24.87	QP
3	249.996	26.18	46.00	-19.82	51.19	-25.01	QP
4	450.010	30.96	46.00	-15.04	50.09	-19.13	QP
5	854.209	35.14	46.00	-10.86	47.36	-12.22	QP
6	902.000	45.07	46.00	-0.93	56.81	-11.74	QP
7	902.106	120.55	-----	-----	132.29	-11.74	QP
8	928.000	25.64	46.00	-20.36	36.84	-11.20	QP
9	950.142	35.14	46.00	-10.86	45.96	-10.82	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_915.000MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_915MHz
Test BY :Rock

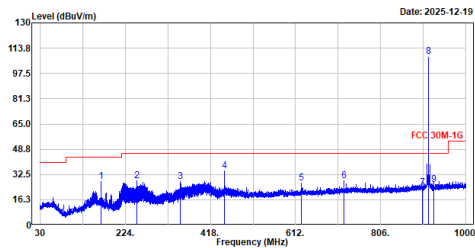


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	168.031	27.81	43.50	-15.69	52.23	-24.42	QP
2	249.996	28.55	46.00	-17.45	53.56	-25.01	QP
3	350.003	28.18	46.00	-17.82	50.30	-22.12	QP
4	450.010	34.72	46.00	-11.28	53.85	-19.13	QP
5	624.998	26.81	46.00	-19.19	42.16	-15.35	QP
6	723.065	28.45	46.00	-17.55	42.26	-13.81	QP
7	902.000	24.11	46.00	-21.89	35.85	-11.74	QP
8	915.000	108.30	-----	-----	119.74	-11.44	QP
9	928.000	25.86	46.00	-20.14	37.06	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_915.000MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_915MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	59.973	27.74	40.00	-12.26	52.01	-24.27	QP
2	219.635	25.91	46.00	-20.09	52.64	-26.73	QP
3	450.010	30.95	46.00	-15.05	50.00	-19.13	QP
4	723.065	30.58	46.00	-15.42	44.39	-13.81	QP
5	867.110	33.91	46.00	-12.09	46.04	-12.13	QP
6	902.000	28.20	46.00	-17.80	39.94	-11.74	QP
7	915.000	120.53	-----	-----	131.97	-11.44	QP
8	928.000	27.13	46.00	-18.87	38.33	-11.20	QP
9	963.140	35.92	54.00	-18.08	46.66	-18.74	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_927.398MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_927.398MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	168.031	26.41	43.50	-17.09	50.83	-24.42	QP
2	249.996	30.21	46.00	-15.79	55.22	-25.01	QP
3	450.010	34.41	46.00	-11.59	53.54	-19.13	QP
4	625.095	27.84	46.00	-18.16	43.19	-15.35	QP
5	735.481	28.48	46.00	-17.52	41.91	-13.43	QP
6	879.429	28.07	46.00	-17.93	40.03	-11.96	QP
7	902.000	22.78	46.00	-23.22	34.52	-11.74	QP
8	927.398	108.40	-----	-----	119.60	-11.20	QP
9	928.000	32.70	46.00	-13.30	43.90	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_927.398MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_927.398MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	59.973	32.32	40.00	-7.68	56.59	-24.27	QP
2	225.261	25.43	46.00	-20.57	52.12	-26.69	QP
3	450.010	31.33	46.00	-14.67	50.46	-19.13	QP
4	831.511	30.57	46.00	-15.43	43.18	-12.61	QP
5	879.429	34.50	46.00	-11.50	46.46	-11.96	QP
6	902.000	25.20	46.00	-20.80	36.94	-11.74	QP
7	927.398	119.35	-----	-----	130.55	-11.20	QP
8	928.000	44.33	46.00	-1.67	55.53	-11.20	QP
9	975.459	34.19	54.00	-19.81	44.82	-10.63	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

For PoE

TX_902.106MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_902.106MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	171.038	33.99	43.50	-9.51	58.59	-24.60	QP
2	216.337	45.02	46.00	-0.98	71.71	-26.69	QP
3	350.003	40.25	46.00	-5.75	62.37	-22.12	QP
4	450.010	40.42	46.00	-5.58	59.55	-19.13	QP
5	625.095	33.86	46.00	-12.14	49.21	-15.35	QP
6	750.128	35.77	46.00	-10.23	48.97	-13.20	QP
7	902.000	43.37	46.00	-2.63	55.11	-11.74	QP
8	902.106	109.32	-----	-----	121.06	-11.74	QP
9	928.000	24.55	46.00	-21.45	35.75	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_902.106MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_902.106MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	35.432	37.11	40.00	-2.89	61.85	-24.74	QP
2	130.007	38.70	43.50	-4.80	64.10	-25.40	QP
3	171.426	38.77	43.50	-4.73	63.37	-24.60	QP
4	229.432	44.78	46.00	-1.22	70.95	-26.17	QP
5	500.062	39.04	46.00	-6.96	57.45	-18.41	QP
6	625.095	36.77	46.00	-9.23	52.12	-15.35	QP
7	902.000	44.17	46.00	-1.83	55.91	-11.74	QP
8	902.106	120.25	-----	-----	131.99	-11.74	QP
9	928.000	23.12	46.00	-22.88	34.32	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX 915.000MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_915MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	170.941	34.55	43.50	-8.95	59.14	-24.59	QP
2	213.136	42.30	43.50	-1.20	68.97	-26.67	QP
3	350.003	41.28	46.00	-4.72	63.40	-22.12	QP
4	450.010	40.23	46.00	-5.77	59.36	-19.13	QP
5	500.062	36.11	46.00	-9.89	54.52	-18.41	QP
6	750.128	36.93	46.00	-9.07	50.13	-13.20	QP
7	902.000	23.37	46.00	-22.63	35.11	-11.74	QP
8	915.000	108.11	-----	-----	119.55	-11.44	QP
9	928.000	24.42	46.00	-21.58	35.62	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX 915.000MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_915MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	35.723	37.01	40.00	-2.99	61.70	-24.69	QP
2	133.596	38.57	43.50	-4.93	63.74	-25.17	QP
3	171.038	38.44	43.50	-5.06	63.04	-24.60	QP
4	228.559	44.35	46.00	-1.65	70.63	-26.28	QP
5	500.062	39.95	46.00	-6.05	58.36	-18.41	QP
6	625.095	36.29	46.00	-9.71	51.64	-15.35	QP
7	902.000	22.73	46.00	-23.27	34.47	-11.74	QP
8	915.000	120.34	-----	-----	131.78	-11.44	QP
9	928.000	24.18	46.00	-21.82	35.38	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX 927.398MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_927.398MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	132.626	33.30	43.50	-10.20	58.59	-25.29	QP
2	214.688	42.37	43.50	-1.13	69.03	-26.66	QP
3	350.003	39.97	46.00	-6.03	62.09	-22.12	QP
4	450.010	40.68	46.00	-5.32	59.81	-19.13	QP
5	625.095	32.83	46.00	-13.17	48.18	-15.35	QP
6	750.128	35.86	46.00	-10.14	49.06	-13.20	QP
7	902.000	29.87	46.00	-16.13	41.61	-11.74	QP
8	927.398	108.12	-----	-----	119.32	-11.20	QP
9	928.000	23.97	46.00	-22.03	35.17	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX 927.398MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_927.398MHz
Test BY :Rock

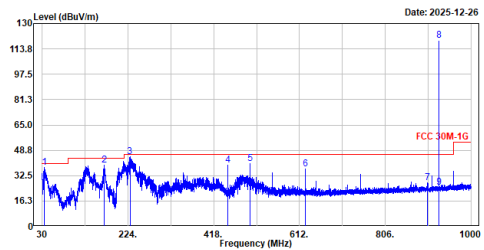


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	35.044	37.80	40.00	-2.20	62.62	-24.82	QP
2	170.747	39.35	43.50	-4.15	63.92	-24.57	QP
3	228.559	44.41	46.00	-1.59	70.69	-26.28	QP
4	450.010	39.18	46.00	-6.82	58.31	-19.13	QP
5	500.062	40.38	46.00	-5.62	58.79	-18.41	QP
6	625.095	36.71	46.00	-9.29	52.06	-15.35	QP
7	902.000	28.05	46.00	-17.95	39.79	-11.74	QP
8	927.398	119.12	-----	-----	130.32	-11.20	QP
9	928.000	25.09	46.00	-20.91	36.29	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Panel

TX 902.106MHz H

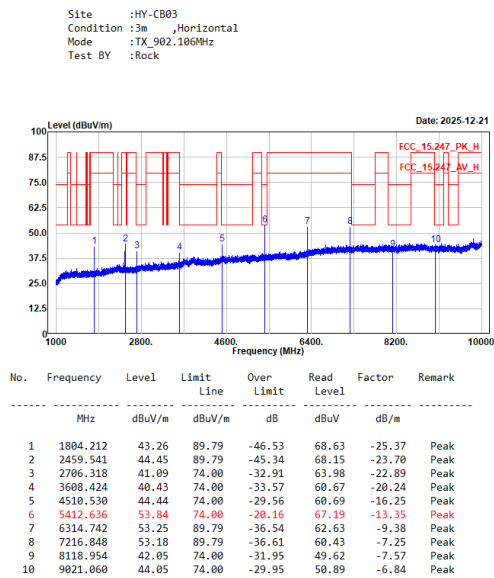


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX 902.106MHz V

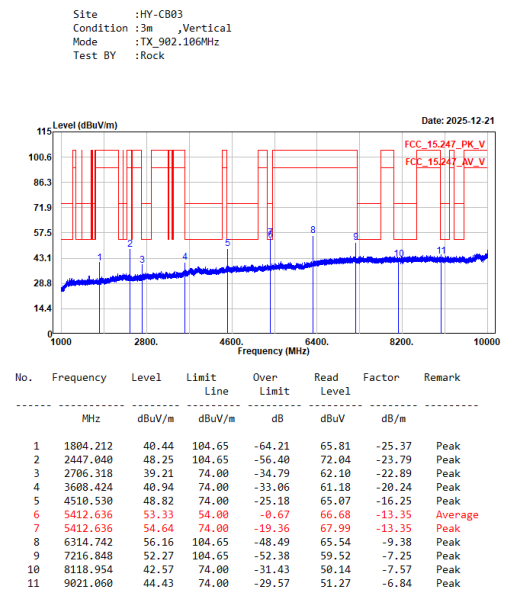


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX 915.000MHz H

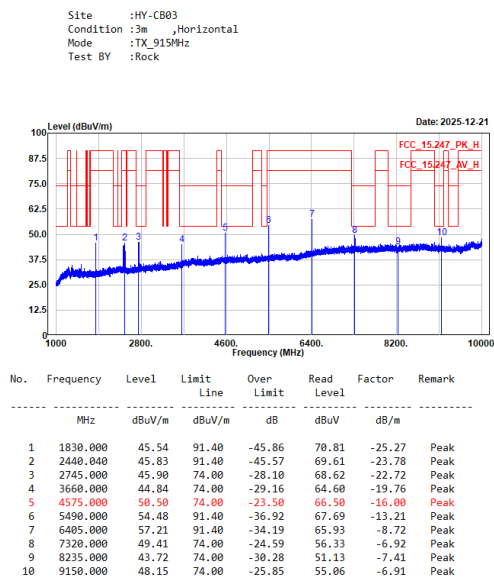

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX 915.000MHz V

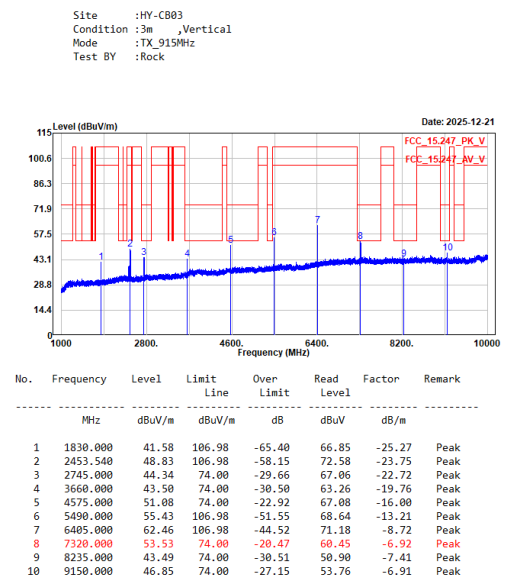

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_927.398MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_927.398MHz
Test BY :Rock

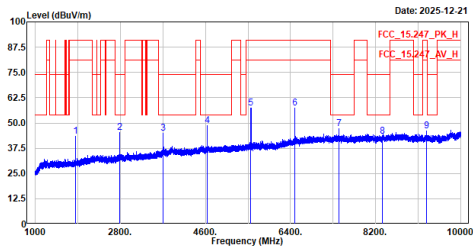


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1854.796	43.38	91.02	-47.64	68.51	-25.13	Peak
2	2782.194	45.14	74.00	-28.86	67.51	-22.37	Peak
3	3709.592	44.90	74.00	-29.10	64.19	-19.29	Peak
4	4636.990	48.60	74.00	-25.40	64.29	-15.69	Peak
5	5564.388	57.38	91.02	-33.64	70.06	-12.68	Peak
6	6491.786	57.54	91.02	-33.48	66.00	-8.46	Peak
7	7419.184	47.25	74.00	-26.75	54.21	-6.96	Peak
8	8346.582	43.57	74.00	-30.43	50.79	-7.22	Peak
9	9273.980	46.02	91.02	-45.00	52.95	-6.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_927.398MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_927.398MHz
Test BY :Rock

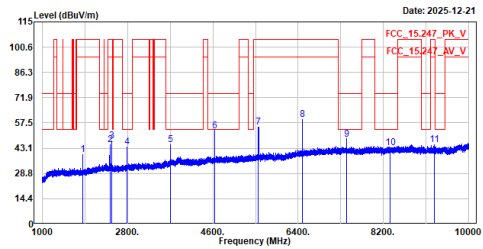


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	1854.796	39.42	105.12	-65.70	64.55	-25.13	Peak
2	2425.790	45.28	105.12	-59.84	68.91	-23.63	Peak
3	2463.791	47.35	105.12	-57.77	71.10	-23.75	Peak
4	2782.194	43.70	74.00	-30.30	66.07	-22.37	Peak
5	3709.592	45.25	74.00	-28.75	64.54	-19.29	Peak
6	4636.990	53.11	74.00	-20.89	68.80	-15.69	Peak
7	5564.388	55.10	105.12	-50.02	67.78	-12.68	Peak
8	6491.786	59.42	105.12	-45.70	67.88	-8.46	Peak
9	7419.184	48.04	74.00	-25.96	55.00	-6.96	Peak
10	8346.582	43.29	74.00	-30.71	50.51	-7.22	Peak
11	9273.980	45.21	105.12	-59.91	52.14	-6.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


For Adapter

TX_902.106MHz_H

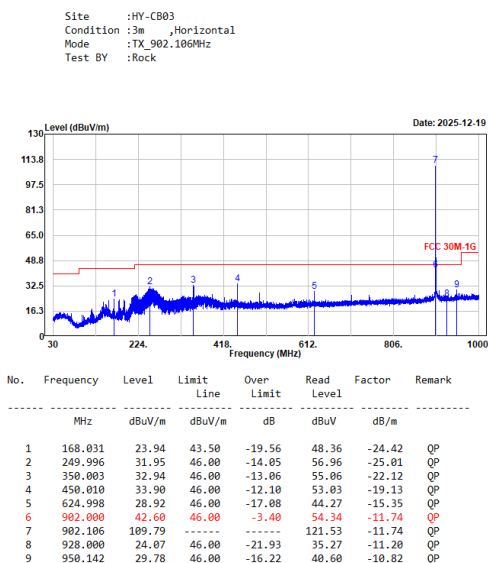


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_902.106MHz_V

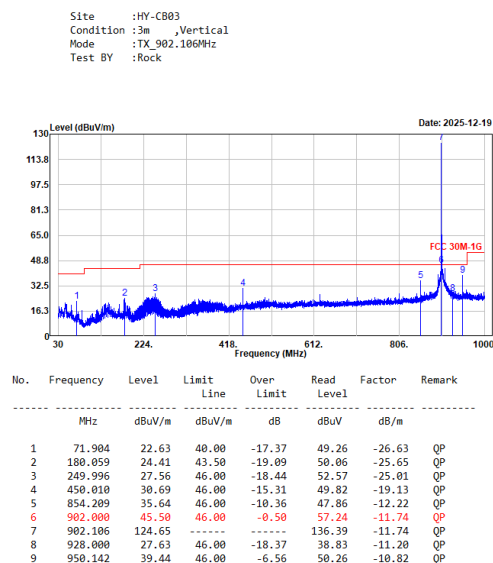


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_915.000MHz_H

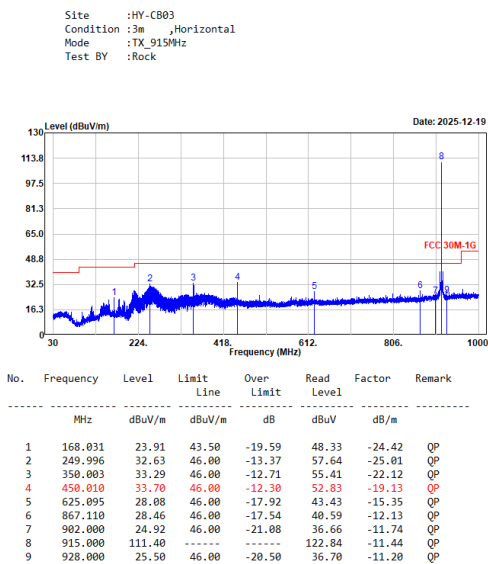

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


TX_915.000MHz_V

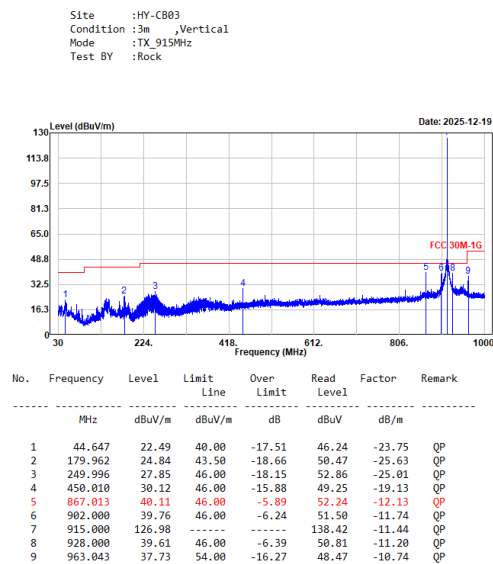

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_927.398MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_927.398MHz
Test BY :Rock

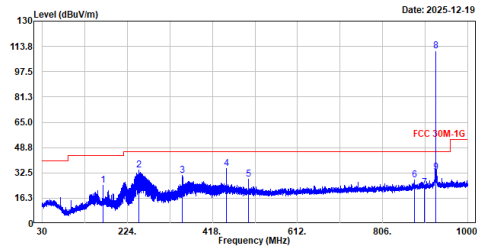


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	168.031	24.30	43.50	-19.20	48.72	-24.42	QP
2	249.996	34.10	46.00	-11.90	59.11	-25.01	QP
3	350.003	30.86	46.00	-15.14	52.98	-22.12	QP
4	450.010	35.17	46.00	-10.83	54.30	-19.13	QP
5	500.062	28.39	46.00	-17.61	46.80	-18.41	QP
6	879.429	27.84	46.00	-18.16	39.80	-11.96	QP
7	902.000	22.83	46.00	-23.17	34.57	-11.74	QP
8	927.398	111.02	-----	-----	122.22	-11.20	QP
9	928.000	32.62	46.00	-13.18	44.02	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_927.398MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_927.398MHz
Test BY :Rock

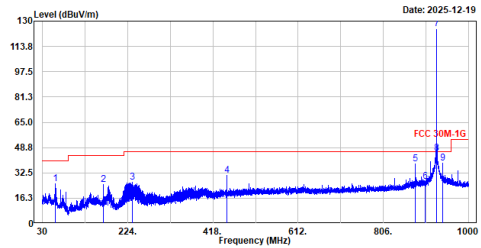


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	59.973	25.51	40.00	-14.49	49.78	-24.27	QP
2	168.031	25.01	43.50	-18.49	49.43	-24.42	QP
3	233.804	26.42	46.00	-19.58	52.10	-25.68	QP
4	450.010	30.75	46.00	-15.25	49.88	-19.13	QP
5	879.429	38.49	46.00	-7.51	50.45	-11.96	QP
6	902.000	27.06	46.00	-18.94	38.80	-11.74	QP
7	927.398	125.12	-----	-----	136.32	-11.20	QP
8	928.000	45.05	46.00	-0.95	56.25	-11.20	QP
9	941.121	38.65	46.00	-7.35	49.71	-11.06	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

For PoE

TX_902.106MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_902.106MHz
Test BY :Rock

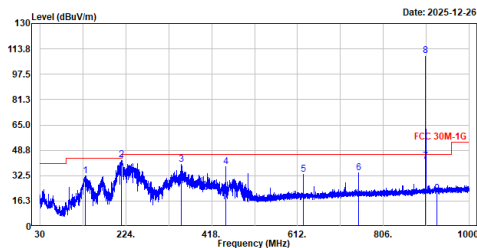


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	131.462	32.31	43.50	-11.19	57.72	-25.41	QP
2	214.494	42.74	43.50	-0.76	69.40	-26.66	QP
3	350.003	39.67	46.00	-6.33	61.79	-22.12	QP
4	450.010	38.87	46.00	-7.93	57.20	-19.13	QP
5	625.095	33.40	46.00	-12.60	48.75	-15.35	QP
6	750.128	34.23	46.00	-11.77	47.43	-13.20	QP
7	902.000	41.50	46.00	-4.50	53.24	-11.74	QP
8	902.127	109.24	-----	-----	120.98	-11.74	QP
9	928.000	20.90	46.00	-25.10	32.10	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_902.106MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_902.106MHz
Test BY :Rock

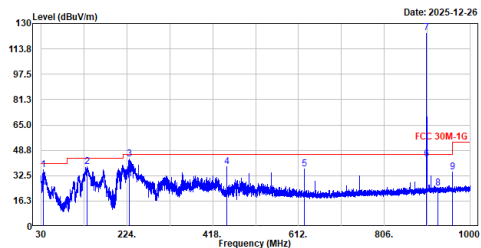


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	35.432	36.15	40.00	-3.85	60.89	-24.74	QP
2	133.984	38.14	43.50	-5.36	63.22	-25.08	QP
3	230.014	42.94	46.00	-3.06	69.04	-26.10	QP
4	450.010	38.50	46.00	-7.50	57.63	-19.13	QP
5	625.095	36.77	46.00	-9.23	52.12	-15.35	QP
6	902.000	43.06	46.00	-2.94	54.80	-11.74	QP
7	902.106	124.32	-----	-----	136.06	-11.74	QP
8	928.000	24.36	46.00	-21.64	35.56	-11.20	QP
9	960.133	34.61	54.00	-19.39	45.36	-10.75	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX 915.000MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_915MHz
Test BY :Rock

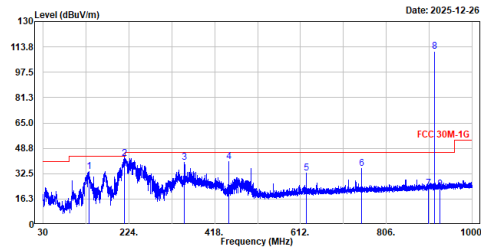


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	133.208	33.69	43.50	-9.81	58.94	-25.25	QP
2	214.300	42.01	43.50	-1.49	68.67	-26.66	QP
3	350.003	39.71	46.00	-6.29	61.83	-22.12	QP
4	450.010	40.20	46.00	-5.80	59.33	-19.13	QP
5	625.095	32.99	46.00	-13.01	48.34	-15.35	QP
6	750.128	35.99	46.00	-10.01	49.19	-13.20	QP
7	902.000	22.83	46.00	-23.17	34.57	-11.74	QP
8	915.000	111.02	-----	-----	122.46	-11.44	QP
9	928.000	22.69	46.00	-23.31	33.89	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX 915.000MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_915MHz
Test BY :Rock

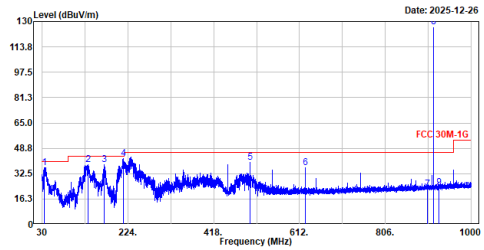


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	35.432	36.34	40.00	-3.66	61.08	-24.74	QP
2	133.693	38.49	43.50	-5.01	63.64	-25.15	QP
3	170.068	38.40	43.50	-5.10	62.92	-24.52	QP
4	213.621	42.26	43.50	-1.24	68.93	-26.67	QP
5	500.062	39.53	46.00	-6.47	57.94	-18.41	QP
6	625.095	36.28	46.00	-9.72	51.63	-15.35	QP
7	902.000	22.75	46.00	-23.25	34.49	-11.74	QP
8	915.000	126.64	-----	-----	138.08	-11.44	QP
9	928.000	23.55	46.00	-22.45	34.75	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX 927.398MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_927.398MHz
Test BY :Rock

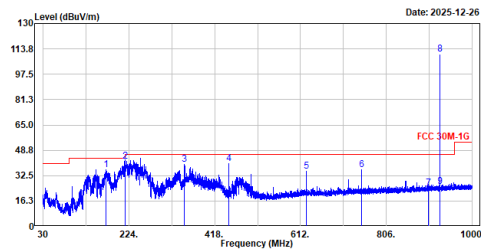


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	172.396	36.36	43.50	-7.14	61.83	-24.67	QP
2	215.464	41.85	43.50	-1.65	68.52	-26.67	QP
3	350.003	39.62	46.00	-6.38	61.74	-22.12	QP
4	450.010	39.99	46.00	-6.01	59.12	-19.13	QP
5	625.095	35.44	46.00	-10.56	50.79	-15.35	QP
6	750.128	36.47	46.00	-9.53	49.67	-13.20	QP
7	902.000	24.74	46.00	-21.26	36.48	-11.74	QP
8	927.398	110.58	-----	-----	121.78	-11.20	QP
9	928.000	25.40	46.00	-20.60	36.60	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX 927.398MHz_V



Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_927.398MHz
Test BY :Rock


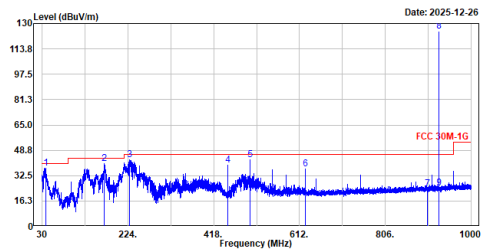


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	38.148	37.45	40.00	-2.55	61.78	-24.33	QP
2	170.844	40.40	43.50	-3.10	64.98	-24.58	QP
3	227.686	42.89	46.00	-3.11	69.28	-26.39	QP
4	450.010	39.26	46.00	-6.74	58.39	-19.13	QP
5	500.062	42.79	46.00	-3.21	61.20	-18.41	QP
6	625.095	36.69	46.00	-9.31	52.04	-15.35	QP
7	902.000	24.05	46.00	-21.95	35.79	-11.74	QP
8	927.398	124.89	-----	-----	136.09	-11.20	QP
9	928.000	24.65	46.00	-21.35	35.85	-11.20	QP



Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Appendix I. Test Result of Radiated Emissions Co-location

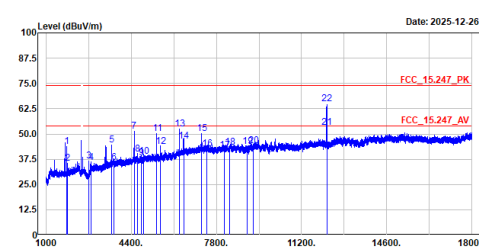
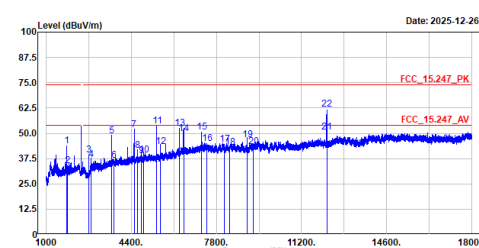
TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz_H								TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz_H_002.png																																																																																																																																																																																																																							
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz Test BY :Rock  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>1804.212</td><td>43.86</td><td>74.00</td><td>-30.14</td><td>69.23</td><td>-25.37</td><td>Peak</td></tr><tr><td>2</td><td>1853.802</td><td>35.35</td><td>74.00</td><td>-38.65</td><td>60.49</td><td>-25.14</td><td>Peak</td></tr><tr><td>3</td><td>2706.318</td><td>36.68</td><td>74.00</td><td>-37.32</td><td>59.57</td><td>-22.89</td><td>Peak</td></tr><tr><td>4</td><td>2780.703</td><td>35.86</td><td>74.00</td><td>-38.14</td><td>58.24</td><td>-22.38</td><td>Peak</td></tr><tr><td>5</td><td>3608.424</td><td>44.40</td><td>74.00</td><td>-29.60</td><td>64.64</td><td>-20.24</td><td>Peak</td></tr><tr><td>6</td><td>3707.604</td><td>35.75</td><td>74.00</td><td>-38.25</td><td>55.06</td><td>-19.31</td><td>Peak</td></tr><tr><td>7</td><td>4510.530</td><td>51.46</td><td>74.00</td><td>-22.54</td><td>67.71</td><td>-16.25</td><td>Peak</td></tr><tr><td>8</td><td>4634.505</td><td>40.00</td><td>74.00</td><td>-34.00</td><td>55.70</td><td>-15.70</td><td>Peak</td></tr><tr><td>9</td><td>4810.000</td><td>38.20</td><td>74.00</td><td>-35.80</td><td>53.13</td><td>-14.93</td><td>Peak</td></tr><tr><td>10</td><td>4884.000</td><td>39.01</td><td>74.00</td><td>-34.99</td><td>53.57</td><td>-14.56</td><td>Peak</td></tr><tr><td>11</td><td>5412.636</td><td>50.14</td><td>74.00</td><td>-23.86</td><td>63.49</td><td>-13.35</td><td>Peak</td></tr><tr><td>12</td><td>5561.406</td><td>43.85</td><td>74.00</td><td>-30.15</td><td>56.55</td><td>-12.70</td><td>Peak</td></tr><tr><td>13</td><td>6314.742</td><td>52.34</td><td>74.00</td><td>-21.66</td><td>61.72</td><td>-9.38</td><td>Peak</td></tr><tr><td>14</td><td>6488.307</td><td>46.30</td><td>74.00</td><td>-27.70</td><td>54.77</td><td>-8.47</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.								No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	1804.212	43.86	74.00	-30.14	69.23	-25.37	Peak	2	1853.802	35.35	74.00	-38.65	60.49	-25.14	Peak	3	2706.318	36.68	74.00	-37.32	59.57	-22.89	Peak	4	2780.703	35.86	74.00	-38.14	58.24	-22.38	Peak	5	3608.424	44.40	74.00	-29.60	64.64	-20.24	Peak	6	3707.604	35.75	74.00	-38.25	55.06	-19.31	Peak	7	4510.530	51.46	74.00	-22.54	67.71	-16.25	Peak	8	4634.505	40.00	74.00	-34.00	55.70	-15.70	Peak	9	4810.000	38.20	74.00	-35.80	53.13	-14.93	Peak	10	4884.000	39.01	74.00	-34.99	53.57	-14.56	Peak	11	5412.636	50.14	74.00	-23.86	63.49	-13.35	Peak	12	5561.406	43.85	74.00	-30.15	56.55	-12.70	Peak	13	6314.742	52.34	74.00	-21.66	61.72	-9.38	Peak	14	6488.307	46.30	74.00	-27.70	54.77	-8.47	Peak	<table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>15</td><td>7216.848</td><td>50.01</td><td>74.00</td><td>-23.99</td><td>57.26</td><td>-7.25</td><td>Peak</td></tr><tr><td>16</td><td>7415.208</td><td>42.72</td><td>74.00</td><td>-31.28</td><td>49.66</td><td>-6.94</td><td>Peak</td></tr><tr><td>17</td><td>8118.954</td><td>41.94</td><td>74.00</td><td>-32.06</td><td>49.51</td><td>-7.57</td><td>Peak</td></tr><tr><td>18</td><td>8342.109</td><td>43.52</td><td>74.00</td><td>-30.48</td><td>50.76</td><td>-7.24</td><td>Peak</td></tr><tr><td>19</td><td>9021.060</td><td>43.61</td><td>74.00</td><td>-30.39</td><td>50.45</td><td>-6.84</td><td>Peak</td></tr><tr><td>20</td><td>9269.010</td><td>44.11</td><td>74.00</td><td>-29.89</td><td>51.04</td><td>-6.93</td><td>Peak</td></tr><tr><td>21</td><td>12210.000</td><td>53.24</td><td>54.00</td><td>-0.76</td><td>54.42</td><td>-1.18</td><td>Average</td></tr><tr><td>22</td><td>12210.000</td><td>64.89</td><td>74.00</td><td>-9.11</td><td>66.07</td><td>-1.18</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.								No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		15	7216.848	50.01	74.00	-23.99	57.26	-7.25	Peak	16	7415.208	42.72	74.00	-31.28	49.66	-6.94	Peak	17	8118.954	41.94	74.00	-32.06	49.51	-7.57	Peak	18	8342.109	43.52	74.00	-30.48	50.76	-7.24	Peak	19	9021.060	43.61	74.00	-30.39	50.45	-6.84	Peak	20	9269.010	44.11	74.00	-29.89	51.04	-6.93	Peak	21	12210.000	53.24	54.00	-0.76	54.42	-1.18	Average	22	12210.000	64.89	74.00	-9.11	66.07	-1.18	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																																																																																																																									
1	1804.212	43.86	74.00	-30.14	69.23	-25.37	Peak																																																																																																																																																																																																																								
2	1853.802	35.35	74.00	-38.65	60.49	-25.14	Peak																																																																																																																																																																																																																								
3	2706.318	36.68	74.00	-37.32	59.57	-22.89	Peak																																																																																																																																																																																																																								
4	2780.703	35.86	74.00	-38.14	58.24	-22.38	Peak																																																																																																																																																																																																																								
5	3608.424	44.40	74.00	-29.60	64.64	-20.24	Peak																																																																																																																																																																																																																								
6	3707.604	35.75	74.00	-38.25	55.06	-19.31	Peak																																																																																																																																																																																																																								
7	4510.530	51.46	74.00	-22.54	67.71	-16.25	Peak																																																																																																																																																																																																																								
8	4634.505	40.00	74.00	-34.00	55.70	-15.70	Peak																																																																																																																																																																																																																								
9	4810.000	38.20	74.00	-35.80	53.13	-14.93	Peak																																																																																																																																																																																																																								
10	4884.000	39.01	74.00	-34.99	53.57	-14.56	Peak																																																																																																																																																																																																																								
11	5412.636	50.14	74.00	-23.86	63.49	-13.35	Peak																																																																																																																																																																																																																								
12	5561.406	43.85	74.00	-30.15	56.55	-12.70	Peak																																																																																																																																																																																																																								
13	6314.742	52.34	74.00	-21.66	61.72	-9.38	Peak																																																																																																																																																																																																																								
14	6488.307	46.30	74.00	-27.70	54.77	-8.47	Peak																																																																																																																																																																																																																								
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																																																																																																																									
15	7216.848	50.01	74.00	-23.99	57.26	-7.25	Peak																																																																																																																																																																																																																								
16	7415.208	42.72	74.00	-31.28	49.66	-6.94	Peak																																																																																																																																																																																																																								
17	8118.954	41.94	74.00	-32.06	49.51	-7.57	Peak																																																																																																																																																																																																																								
18	8342.109	43.52	74.00	-30.48	50.76	-7.24	Peak																																																																																																																																																																																																																								
19	9021.060	43.61	74.00	-30.39	50.45	-6.84	Peak																																																																																																																																																																																																																								
20	9269.010	44.11	74.00	-29.89	51.04	-6.93	Peak																																																																																																																																																																																																																								
21	12210.000	53.24	54.00	-0.76	54.42	-1.18	Average																																																																																																																																																																																																																								
22	12210.000	64.89	74.00	-9.11	66.07	-1.18	Peak																																																																																																																																																																																																																								
TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz_V								TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz_V_002.png																																																																																																																																																																																																																							
Site :HY-CB03 Condition :3m ,Vertical Mode :TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz Test BY :Rock  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>1804.212</td><td>43.84</td><td>74.00</td><td>-30.16</td><td>69.21</td><td>-25.37</td><td>Peak</td></tr><tr><td>2</td><td>1853.802</td><td>34.00</td><td>74.00</td><td>-40.00</td><td>59.14</td><td>-25.14</td><td>Peak</td></tr><tr><td>3</td><td>2706.318</td><td>39.19</td><td>74.00</td><td>-34.81</td><td>62.08</td><td>-22.89</td><td>Peak</td></tr><tr><td>4</td><td>2780.703</td><td>36.92</td><td>74.00</td><td>-37.08</td><td>59.30</td><td>-22.38</td><td>Peak</td></tr><tr><td>5</td><td>3608.424</td><td>48.69</td><td>74.00</td><td>-25.31</td><td>68.93</td><td>-20.24</td><td>Peak</td></tr><tr><td>6</td><td>3707.604</td><td>36.43</td><td>74.00</td><td>-37.57</td><td>55.74</td><td>-19.31</td><td>Peak</td></tr><tr><td>7</td><td>4510.530</td><td>51.78</td><td>74.00</td><td>-22.22</td><td>68.03</td><td>-16.25</td><td>Peak</td></tr><tr><td>8</td><td>4634.505</td><td>41.62</td><td>74.00</td><td>-32.38</td><td>57.32</td><td>-15.70</td><td>Peak</td></tr><tr><td>9</td><td>4810.000</td><td>38.70</td><td>74.00</td><td>-35.30</td><td>53.63</td><td>-14.93</td><td>Peak</td></tr><tr><td>10</td><td>4884.000</td><td>39.13</td><td>74.00</td><td>-34.87</td><td>53.69</td><td>-14.56</td><td>Peak</td></tr><tr><td>11</td><td>5412.636</td><td>53.45</td><td>74.00</td><td>-20.55</td><td>66.80</td><td>-13.35</td><td>Peak</td></tr><tr><td>12</td><td>5561.406</td><td>43.27</td><td>74.00</td><td>-30.73</td><td>55.97</td><td>-12.70</td><td>Peak</td></tr><tr><td>13</td><td>6314.742</td><td>52.55</td><td>74.00</td><td>-21.45</td><td>61.93</td><td>-9.38</td><td>Peak</td></tr><tr><td>14</td><td>6488.307</td><td>49.75</td><td>74.00</td><td>-24.25</td><td>58.22</td><td>-8.47</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.								No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	1804.212	43.84	74.00	-30.16	69.21	-25.37	Peak	2	1853.802	34.00	74.00	-40.00	59.14	-25.14	Peak	3	2706.318	39.19	74.00	-34.81	62.08	-22.89	Peak	4	2780.703	36.92	74.00	-37.08	59.30	-22.38	Peak	5	3608.424	48.69	74.00	-25.31	68.93	-20.24	Peak	6	3707.604	36.43	74.00	-37.57	55.74	-19.31	Peak	7	4510.530	51.78	74.00	-22.22	68.03	-16.25	Peak	8	4634.505	41.62	74.00	-32.38	57.32	-15.70	Peak	9	4810.000	38.70	74.00	-35.30	53.63	-14.93	Peak	10	4884.000	39.13	74.00	-34.87	53.69	-14.56	Peak	11	5412.636	53.45	74.00	-20.55	66.80	-13.35	Peak	12	5561.406	43.27	74.00	-30.73	55.97	-12.70	Peak	13	6314.742	52.55	74.00	-21.45	61.93	-9.38	Peak	14	6488.307	49.75	74.00	-24.25	58.22	-8.47	Peak	<table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>15</td><td>7216.848</td><td>50.74</td><td>74.00</td><td>-23.26</td><td>57.99</td><td>-7.25</td><td>Peak</td></tr><tr><td>16</td><td>7415.208</td><td>44.92</td><td>74.00</td><td>-29.08</td><td>51.86</td><td>-6.94</td><td>Peak</td></tr><tr><td>17</td><td>8118.954</td><td>44.47</td><td>74.00</td><td>-29.53</td><td>52.04</td><td>-7.57</td><td>Peak</td></tr><tr><td>18</td><td>8342.109</td><td>42.99</td><td>74.00</td><td>-31.01</td><td>50.23</td><td>-7.24</td><td>Peak</td></tr><tr><td>19</td><td>9021.060</td><td>46.61</td><td>74.00</td><td>-27.39</td><td>53.45</td><td>-6.84</td><td>Peak</td></tr><tr><td>20</td><td>9269.010</td><td>43.42</td><td>74.00</td><td>-30.58</td><td>50.35</td><td>-6.93</td><td>Peak</td></tr><tr><td>21</td><td>12210.000</td><td>50.67</td><td>54.00</td><td>-3.33</td><td>51.85</td><td>-1.18</td><td>Average</td></tr><tr><td>22</td><td>12210.000</td><td>62.06</td><td>74.00</td><td>-11.94</td><td>63.24</td><td>-1.18</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.								No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		15	7216.848	50.74	74.00	-23.26	57.99	-7.25	Peak	16	7415.208	44.92	74.00	-29.08	51.86	-6.94	Peak	17	8118.954	44.47	74.00	-29.53	52.04	-7.57	Peak	18	8342.109	42.99	74.00	-31.01	50.23	-7.24	Peak	19	9021.060	46.61	74.00	-27.39	53.45	-6.84	Peak	20	9269.010	43.42	74.00	-30.58	50.35	-6.93	Peak	21	12210.000	50.67	54.00	-3.33	51.85	-1.18	Average	22	12210.000	62.06	74.00	-11.94	63.24	-1.18	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																																																																																																																									
1	1804.212	43.84	74.00	-30.16	69.21	-25.37	Peak																																																																																																																																																																																																																								
2	1853.802	34.00	74.00	-40.00	59.14	-25.14	Peak																																																																																																																																																																																																																								
3	2706.318	39.19	74.00	-34.81	62.08	-22.89	Peak																																																																																																																																																																																																																								
4	2780.703	36.92	74.00	-37.08	59.30	-22.38	Peak																																																																																																																																																																																																																								
5	3608.424	48.69	74.00	-25.31	68.93	-20.24	Peak																																																																																																																																																																																																																								
6	3707.604	36.43	74.00	-37.57	55.74	-19.31	Peak																																																																																																																																																																																																																								
7	4510.530	51.78	74.00	-22.22	68.03	-16.25	Peak																																																																																																																																																																																																																								
8	4634.505	41.62	74.00	-32.38	57.32	-15.70	Peak																																																																																																																																																																																																																								
9	4810.000	38.70	74.00	-35.30	53.63	-14.93	Peak																																																																																																																																																																																																																								
10	4884.000	39.13	74.00	-34.87	53.69	-14.56	Peak																																																																																																																																																																																																																								
11	5412.636	53.45	74.00	-20.55	66.80	-13.35	Peak																																																																																																																																																																																																																								
12	5561.406	43.27	74.00	-30.73	55.97	-12.70	Peak																																																																																																																																																																																																																								
13	6314.742	52.55	74.00	-21.45	61.93	-9.38	Peak																																																																																																																																																																																																																								
14	6488.307	49.75	74.00	-24.25	58.22	-8.47	Peak																																																																																																																																																																																																																								
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																																																																																																																									
15	7216.848	50.74	74.00	-23.26	57.99	-7.25	Peak																																																																																																																																																																																																																								
16	7415.208	44.92	74.00	-29.08	51.86	-6.94	Peak																																																																																																																																																																																																																								
17	8118.954	44.47	74.00	-29.53	52.04	-7.57	Peak																																																																																																																																																																																																																								
18	8342.109	42.99	74.00	-31.01	50.23	-7.24	Peak																																																																																																																																																																																																																								
19	9021.060	46.61	74.00	-27.39	53.45	-6.84	Peak																																																																																																																																																																																																																								
20	9269.010	43.42	74.00	-30.58	50.35	-6.93	Peak																																																																																																																																																																																																																								
21	12210.000	50.67	54.00	-3.33	51.85	-1.18	Average																																																																																																																																																																																																																								
22	12210.000	62.06	74.00	-11.94	63.24	-1.18	Peak																																																																																																																																																																																																																								

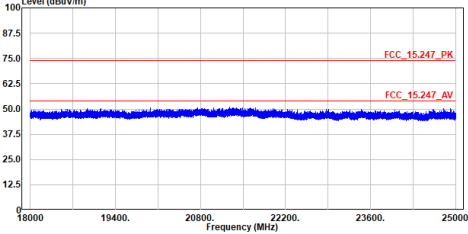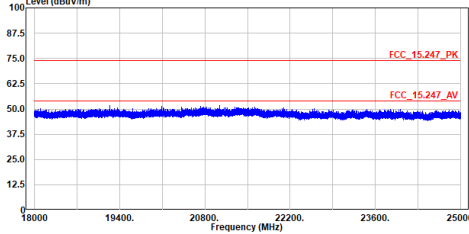TX 926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz H	TX 926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz V
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz Test BY :Rock Level (dBuV/m) Date: 2025-12-26 	Site :HY-CB03 Condition :3m ,Vertical Mode :TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz Test BY :Rock Level (dBuV/m) Date: 2025-12-26 

For Adapter

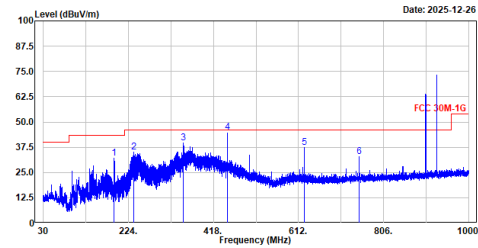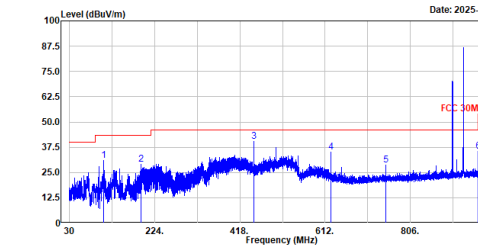TX 926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz_H								TX 926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz_V							
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz Test BY :Rock								Site :HY-CB03 Condition :3m ,Vertical Mode :TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz Test BY :Rock							
															
No.	Frequency	Level	Limit	Over	Read	Factor	Remark	No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	191.990	31.94	43.50	-11.56	58.63	-26.69	QP	1	107.988	30.98	43.50	-12.52	58.23	-27.25	QP
2	235.543	35.19	46.00	-10.81	60.73	-25.54	QP	2	192.572	28.97	43.50	-14.53	55.76	-26.79	QP
3	350.003	39.46	46.00	-6.54	61.58	-22.12	QP	3	450.010	40.49	46.00	-5.51	59.62	-19.13	QP
4	450.010	44.99	46.00	-1.01	64.12	-19.13	QP	4	625.095	35.00	46.00	-11.00	50.35	-15.35	QP
5	625.095	37.49	46.00	-8.51	52.84	-15.35	QP	5	750.128	28.76	46.00	-17.24	41.96	-13.20	QP
6	750.128	32.94	46.00	-13.06	46.14	-13.20	QP	6	960.133	35.65	54.00	-18.35	46.40	-18.75	QP
Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.								Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.							

For PoE

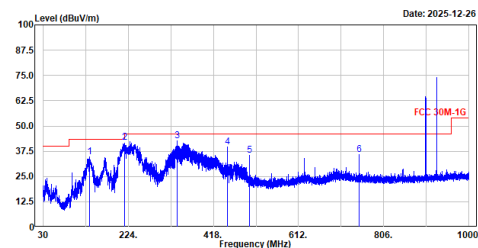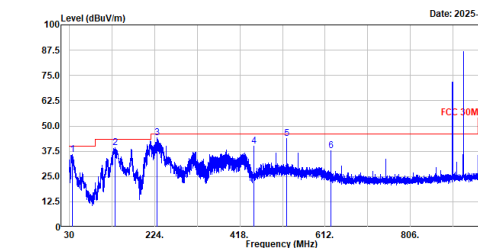TX 926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz_H								TX 926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz_V							
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz Test BY :Rock								Site :HY-CB03 Condition :3m ,Vertical Mode :TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz Test BY :Rock							
															
No.	Frequency	Level	Limit	Over	Read	Factor	Remark	No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	134.954	34.59	43.50	-8.91	59.48	-24.89	QP	1	36.014	35.73	40.00	-4.27	60.36	-24.63	QP
2	215.076	41.94	43.50	-1.56	68.60	-26.66	QP	2	133.790	39.24	43.50	-4.26	64.37	-25.13	QP
3	334.580	42.53	46.00	-3.47	64.70	-22.17	QP	3	229.917	44.15	46.00	-1.85	70.26	-26.11	QP
4	450.010	39.62	46.00	-6.38	58.75	-19.13	QP	4	450.010	40.03	46.00	-5.97	59.16	-19.13	QP
5	500.062	35.60	46.00	-10.40	54.01	-18.41	QP	5	524.991	43.78	46.00	-2.22	61.59	-17.81	QP
6	750.128	35.67	46.00	-10.33	48.87	-13.20	QP	6	625.095	37.80	46.00	-8.20	53.15	-15.35	QP
Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.								Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.							