


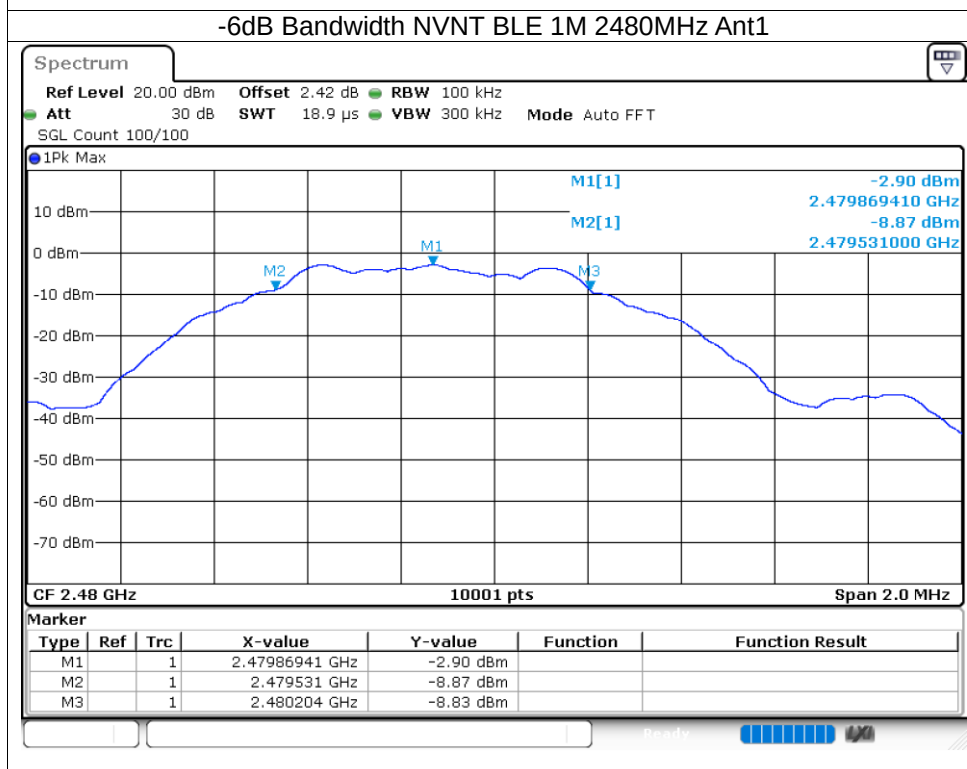
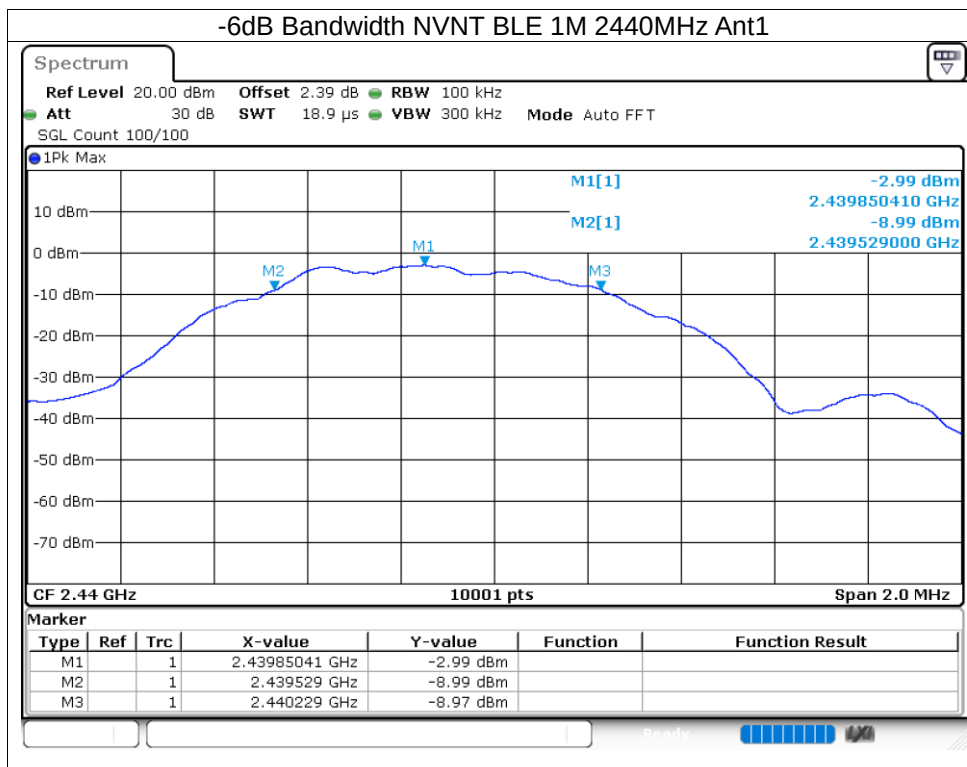


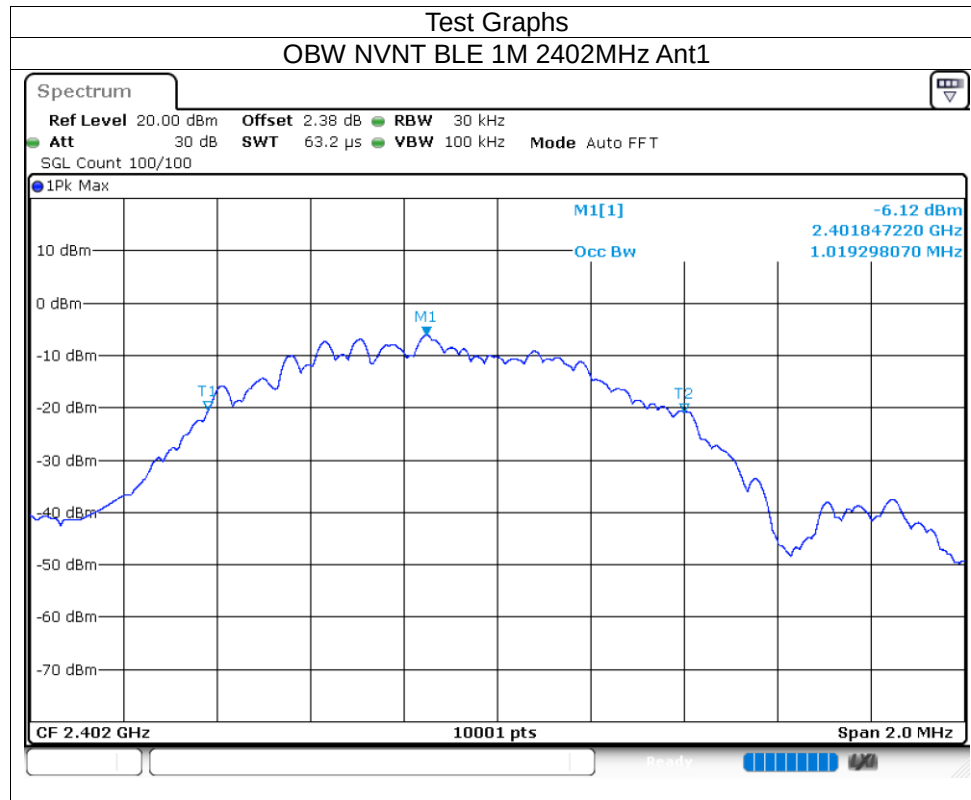

8.1.4 Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.019
NVNT	BLE 1M	2440	Ant1	1.022
NVNT	BLE 1M	2480	Ant1	1.021


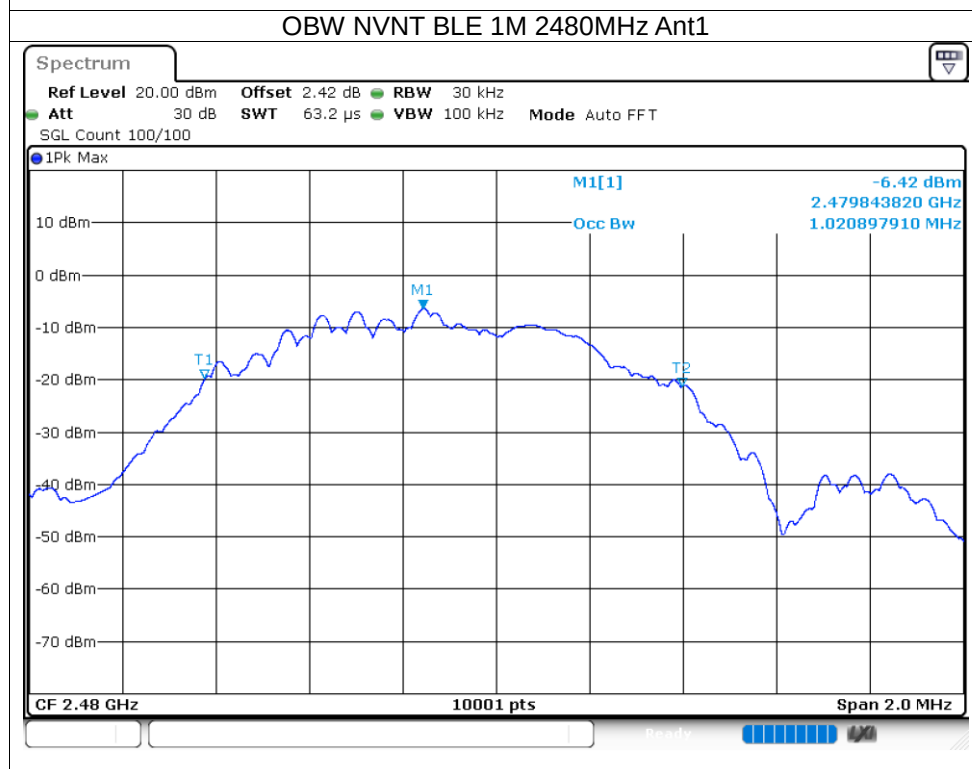


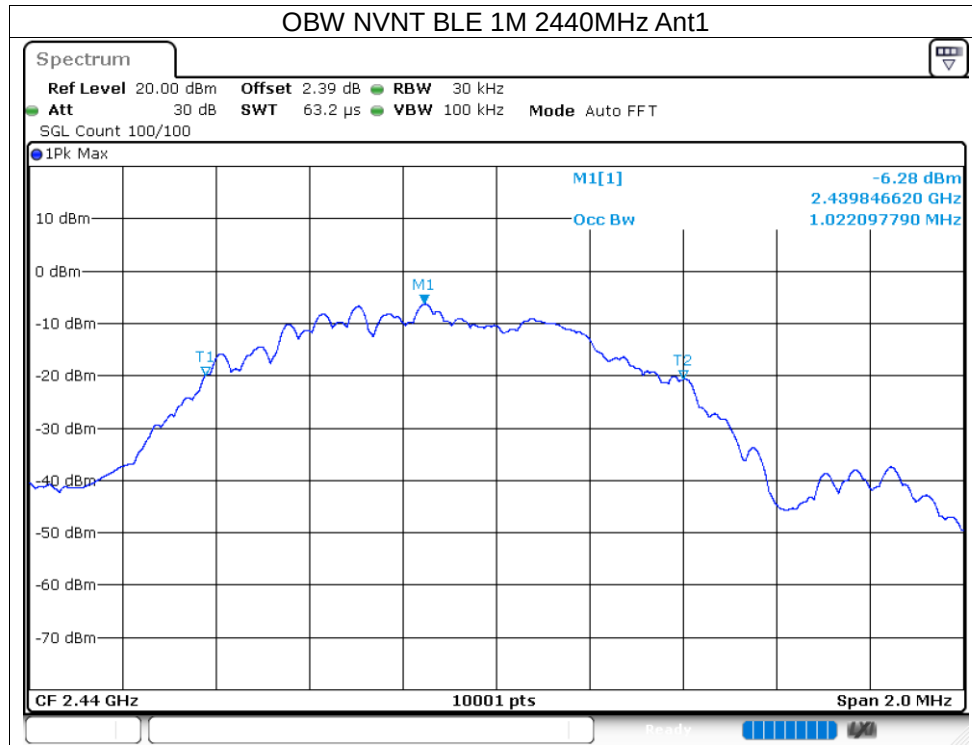

8.1.5 Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-17.27	8	Pass
NVNT	BLE 1M	2440	Ant1	-17.37	8	Pass
NVNT	BLE 1M	2480	Ant1	-17.64	8	Pass

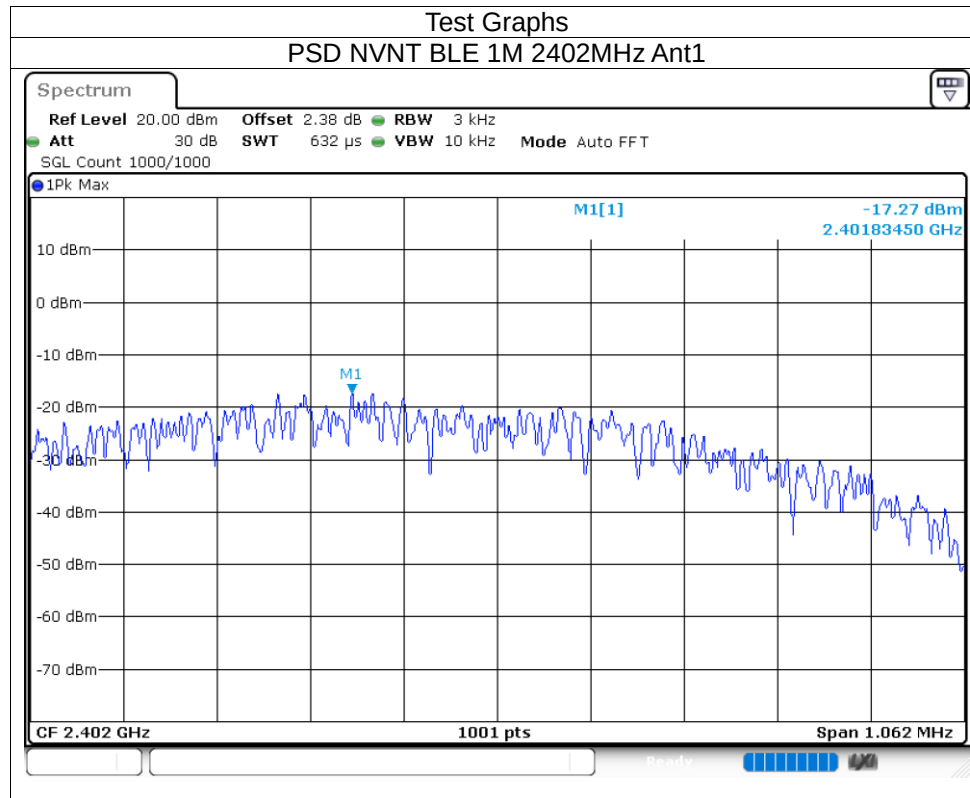


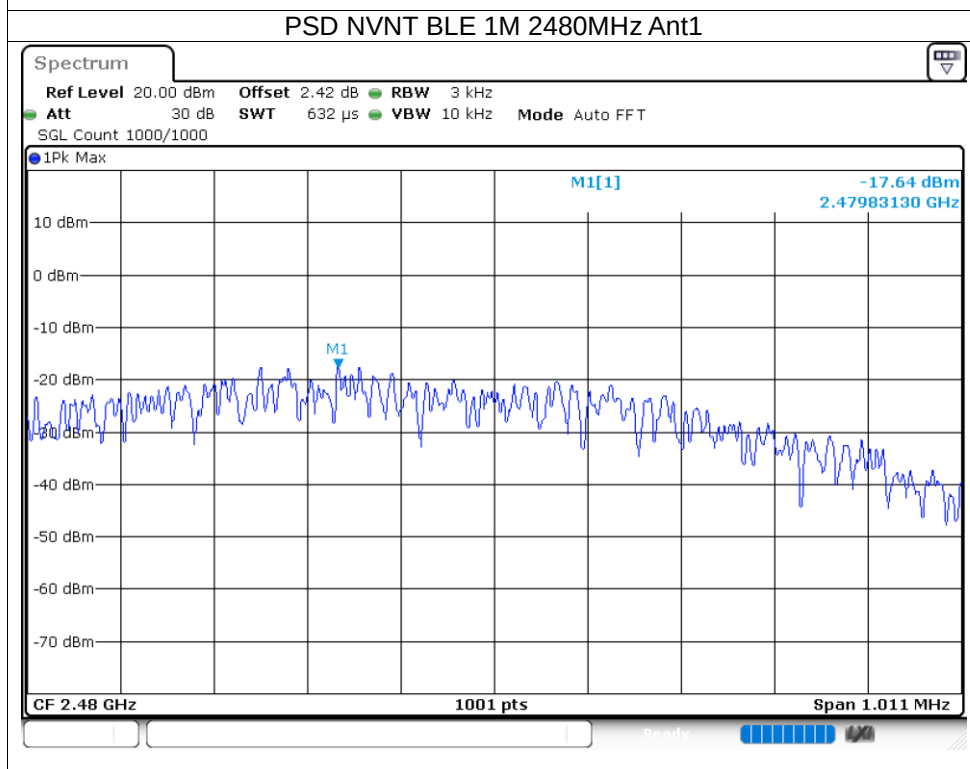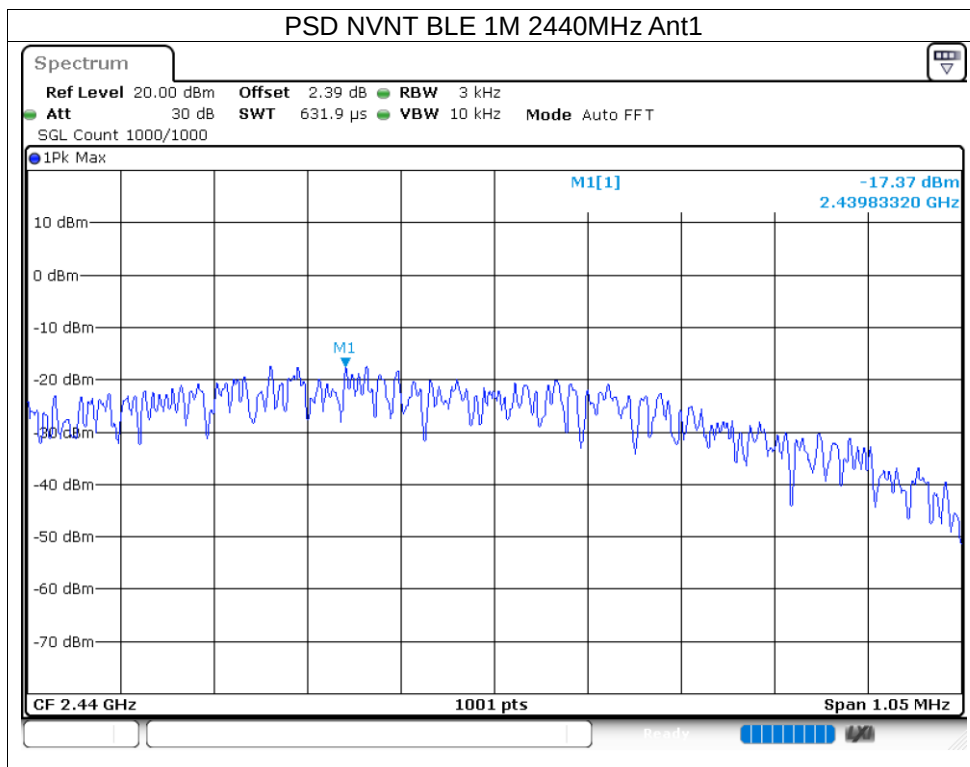

8.1.6 Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-54.24	-20	Pass
NVNT	BLE 1M	2480	Ant1	-45.03	-20	Pass

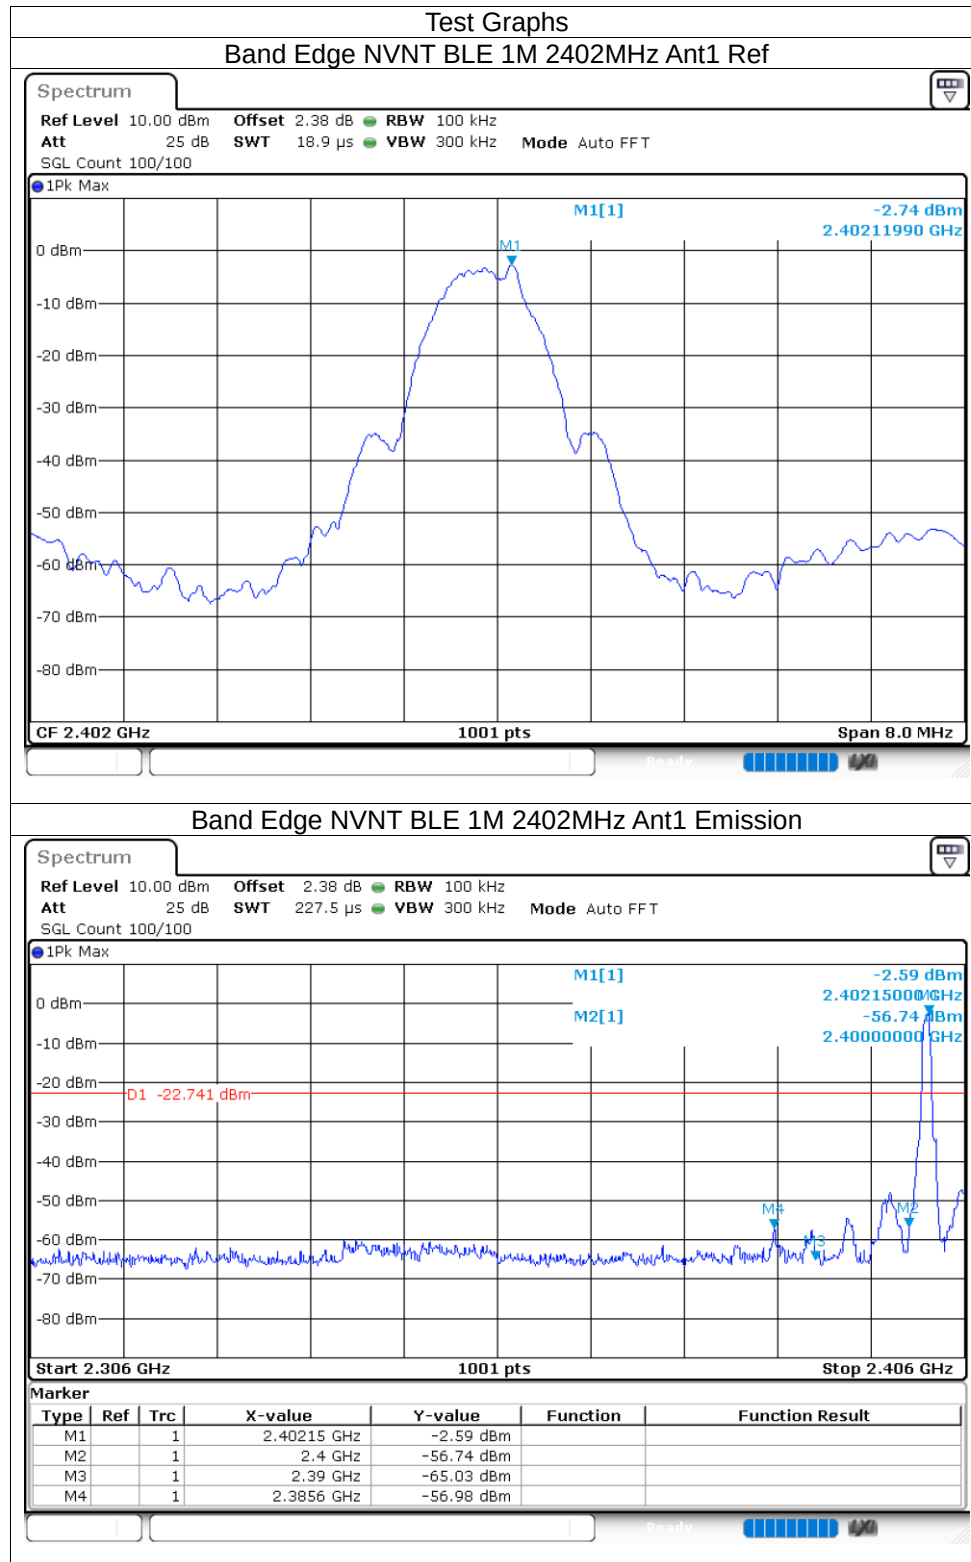



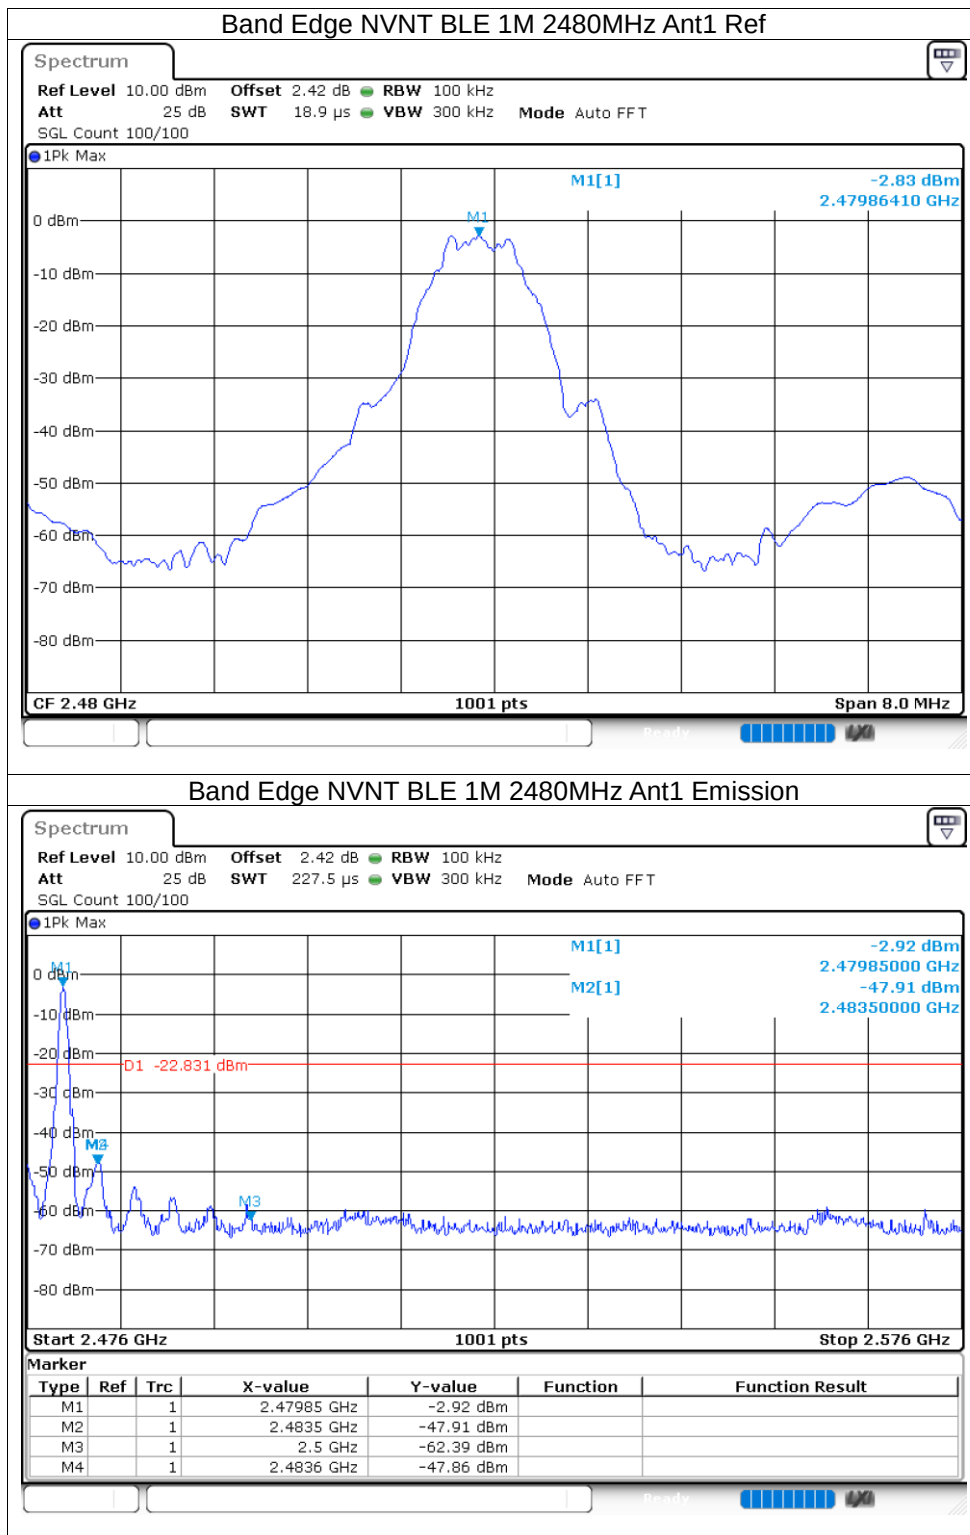


8.1.7 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-38.9	-20	Pass
NVNT	BLE 1M	2440	Ant1	-43.43	-20	Pass
NVNT	BLE 1M	2480	Ant1	-41	-20	Pass

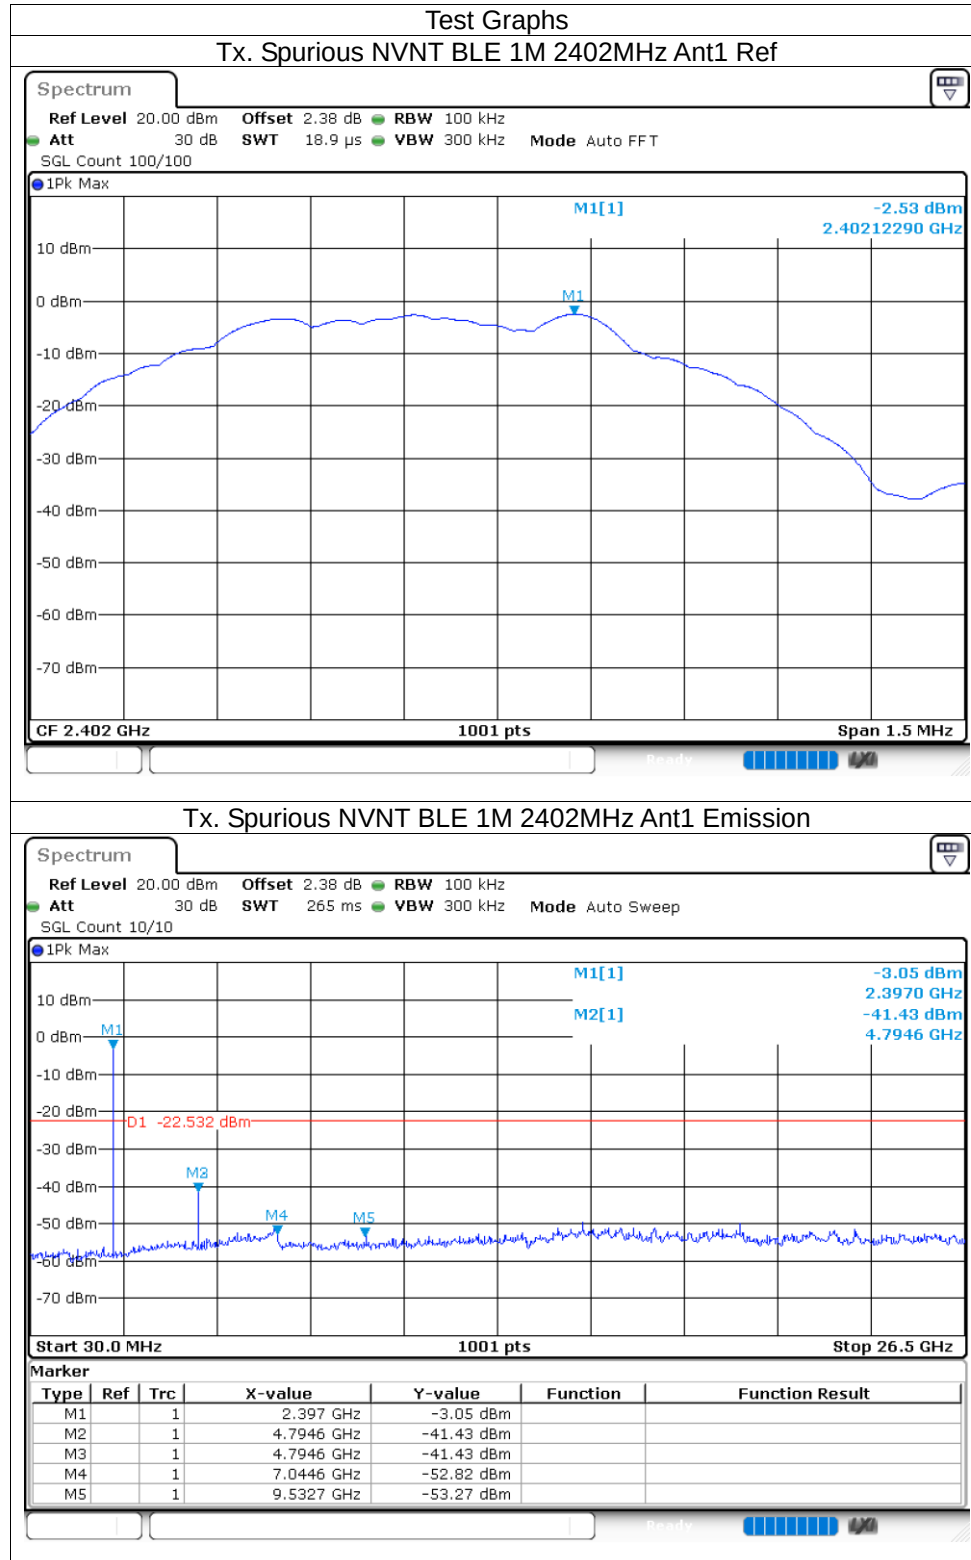

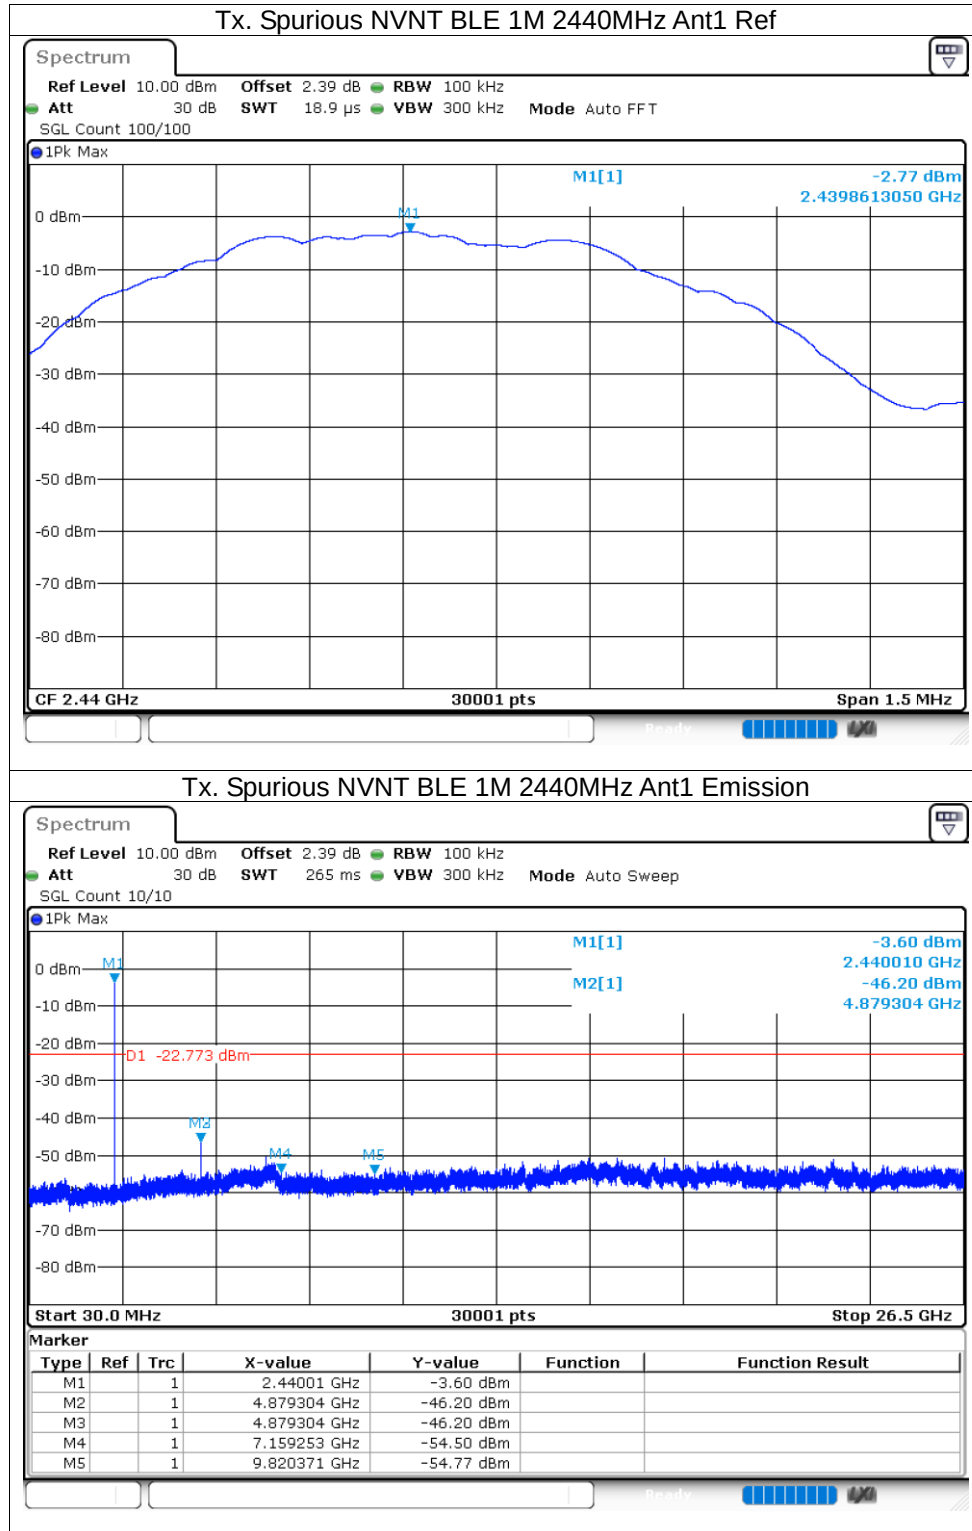


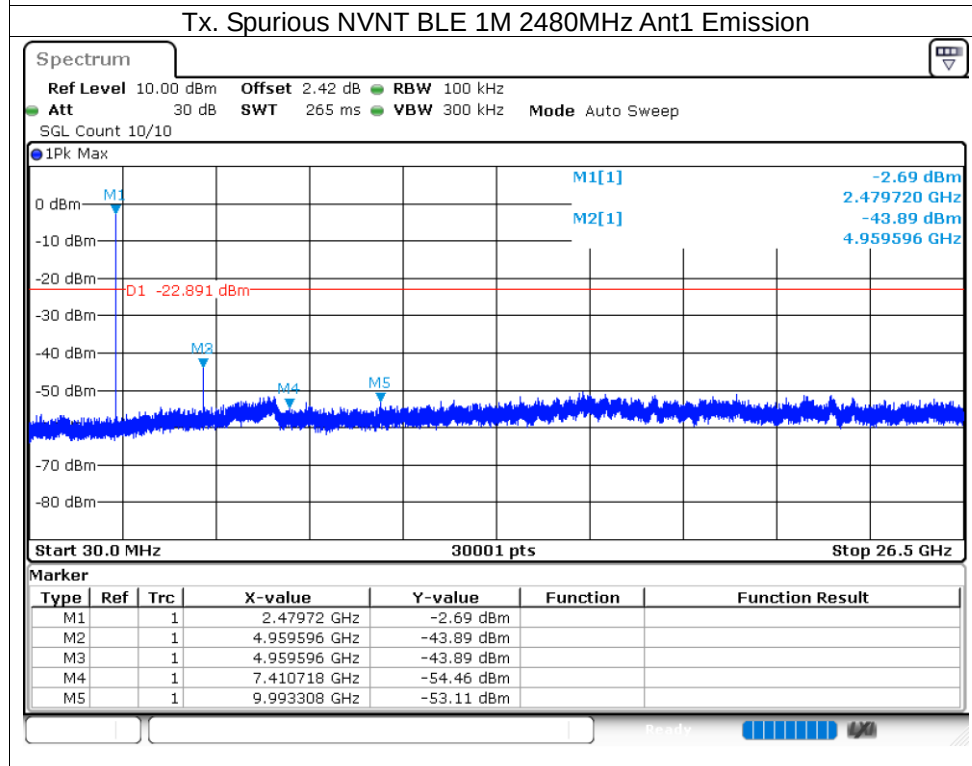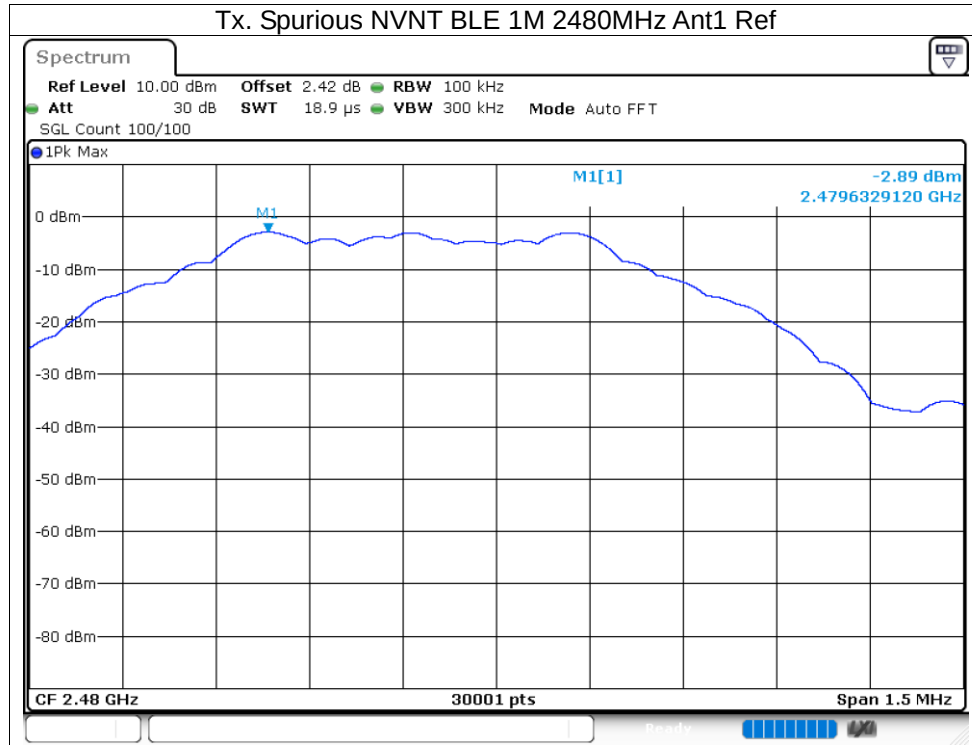



8.2 R

8.2.1 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	62.39	2.05	2.63
NVNT	BLE 1M	2440	Ant1	62.62	2.03	2.63
NVNT	BLE 1M	2480	Ant1	62.4	2.05	2.63

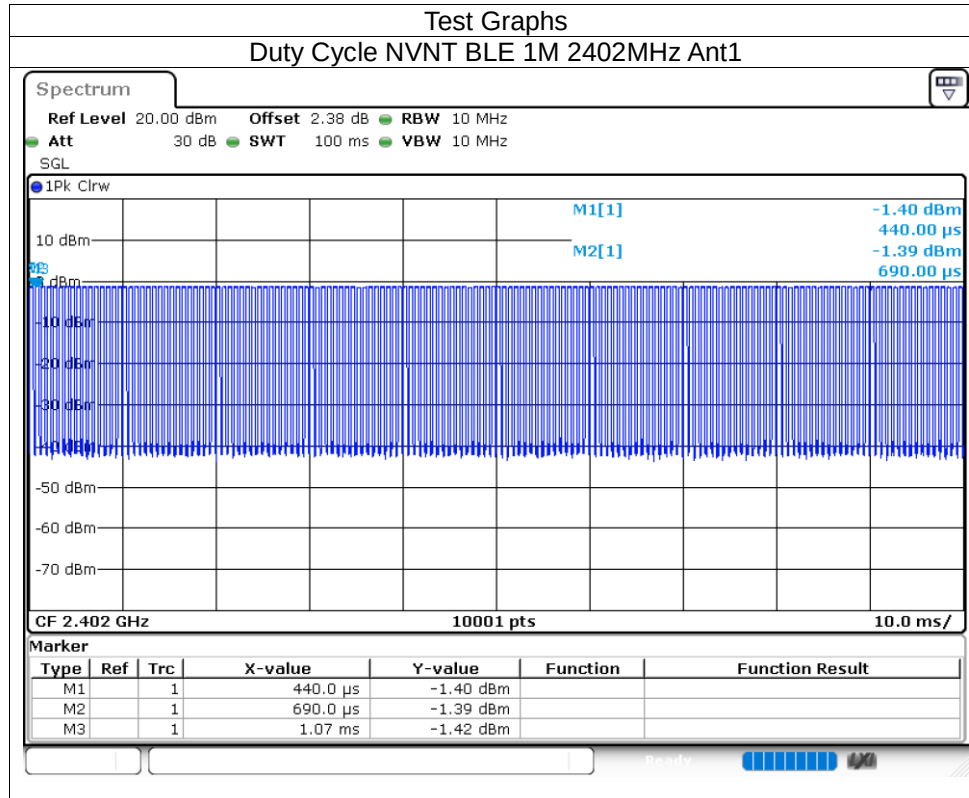


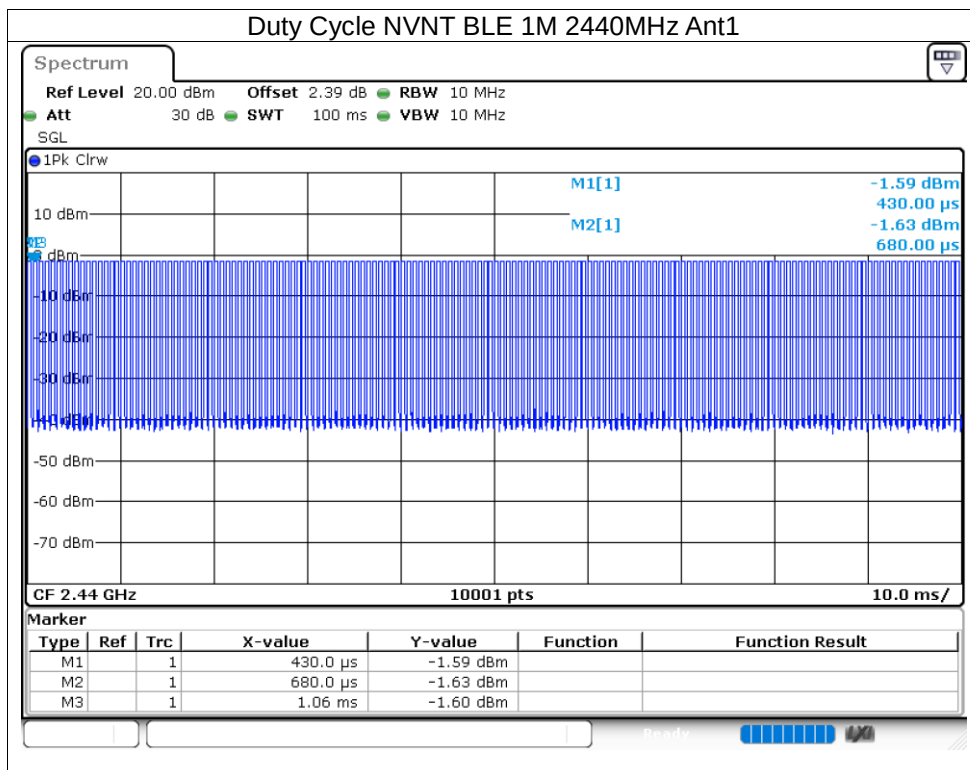


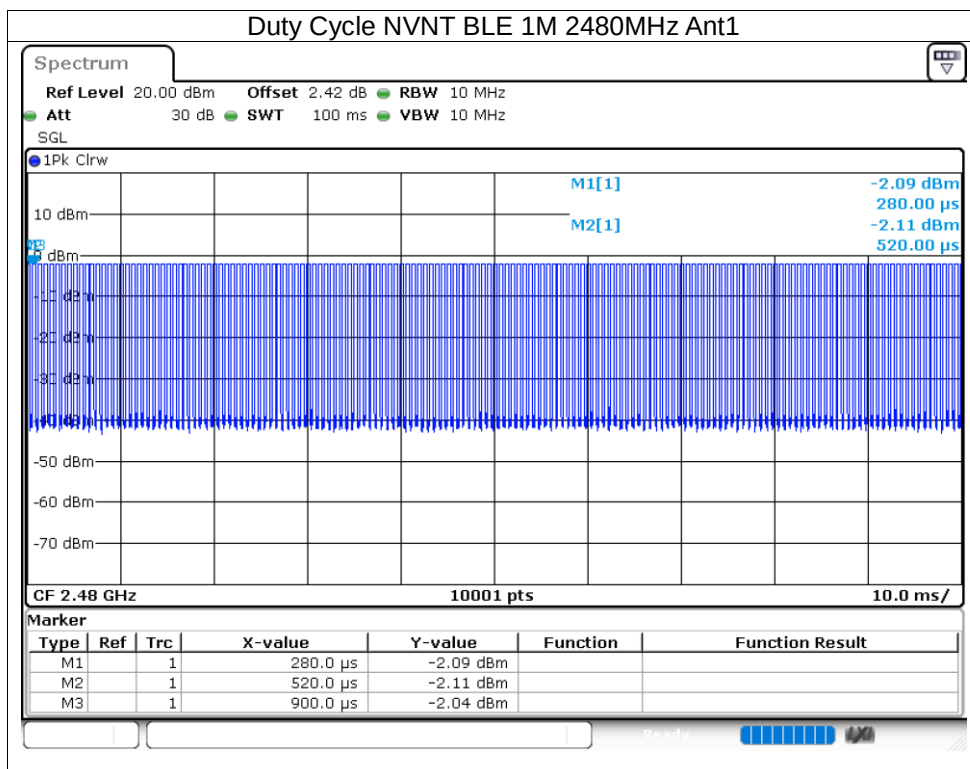


8.2.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-1.4	30	Pass
NVNT	BLE 1M	2440	Ant1	-1.61	30	Pass
NVNT	BLE 1M	2480	Ant1	-2.06	30	Pass

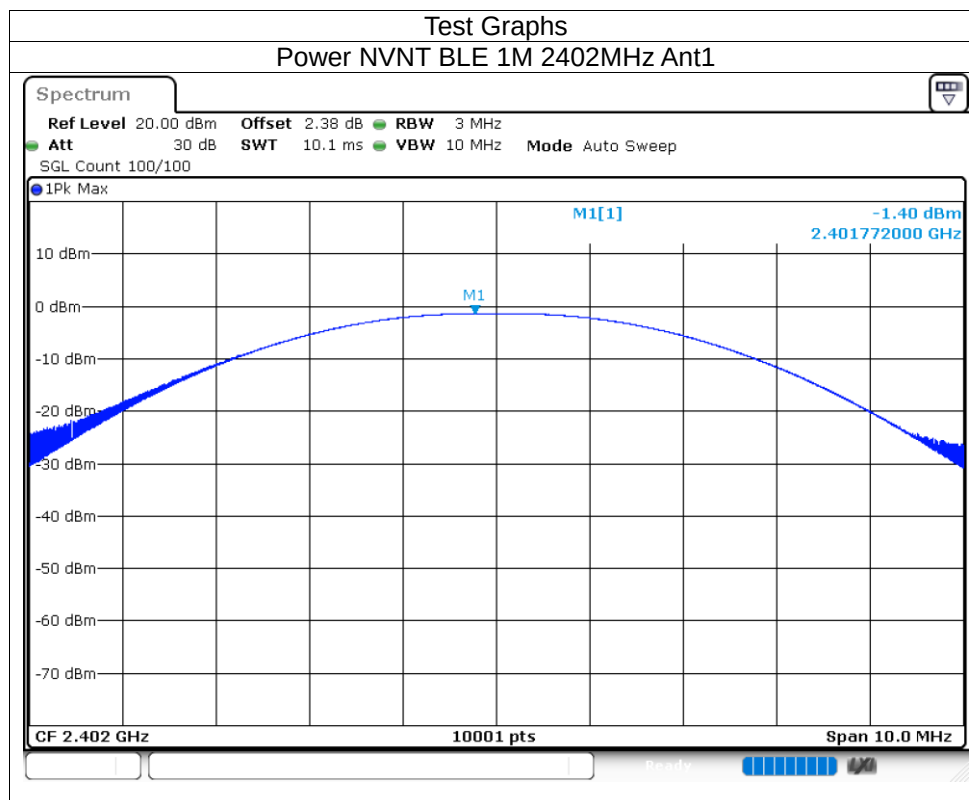



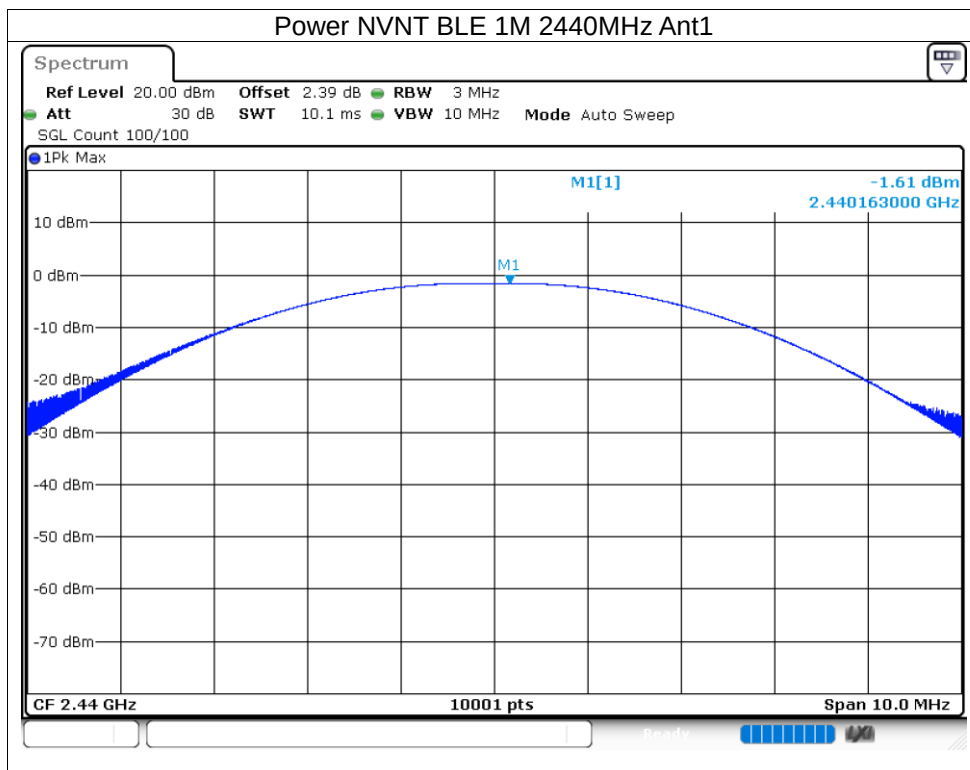


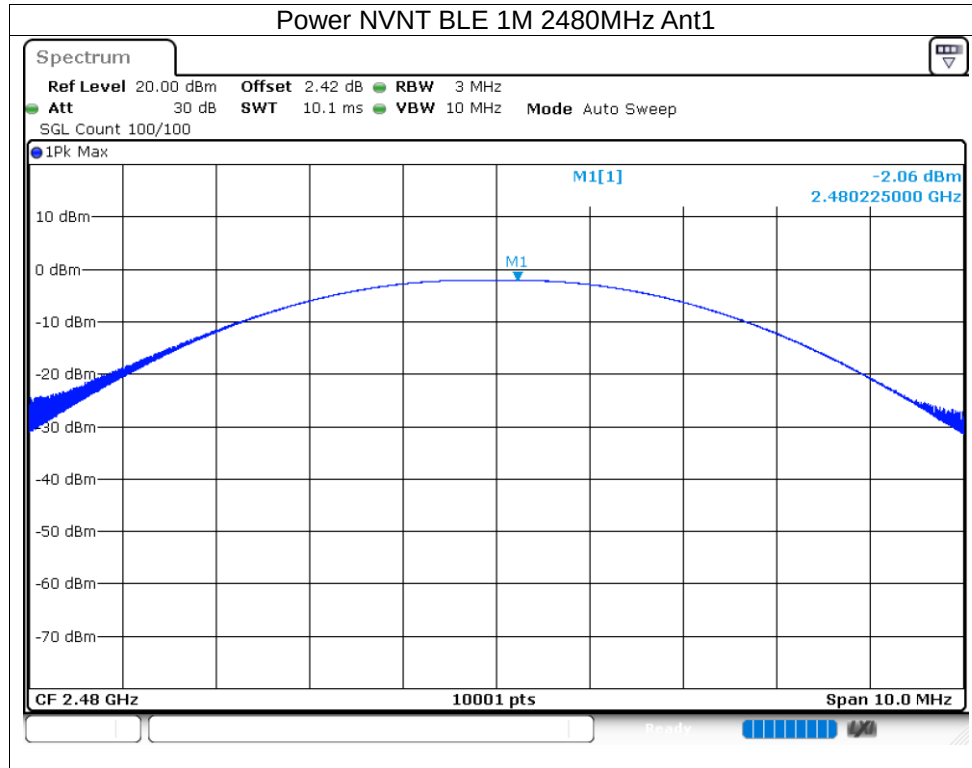

8.2.3 -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.692	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.711	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.716	0.5	Pass


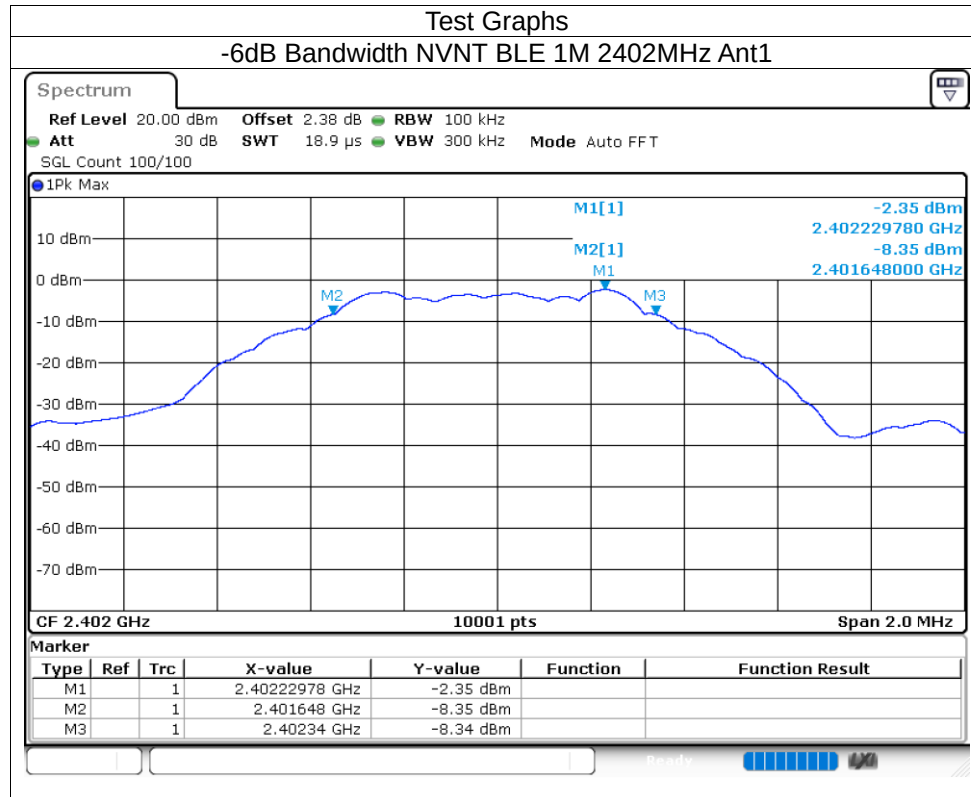


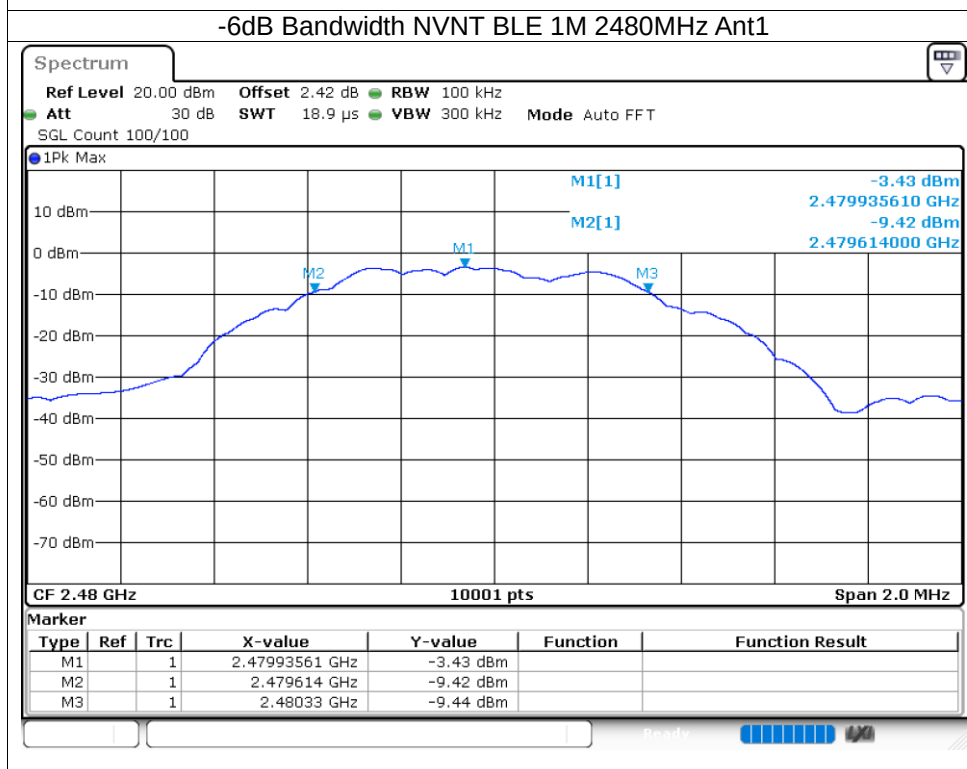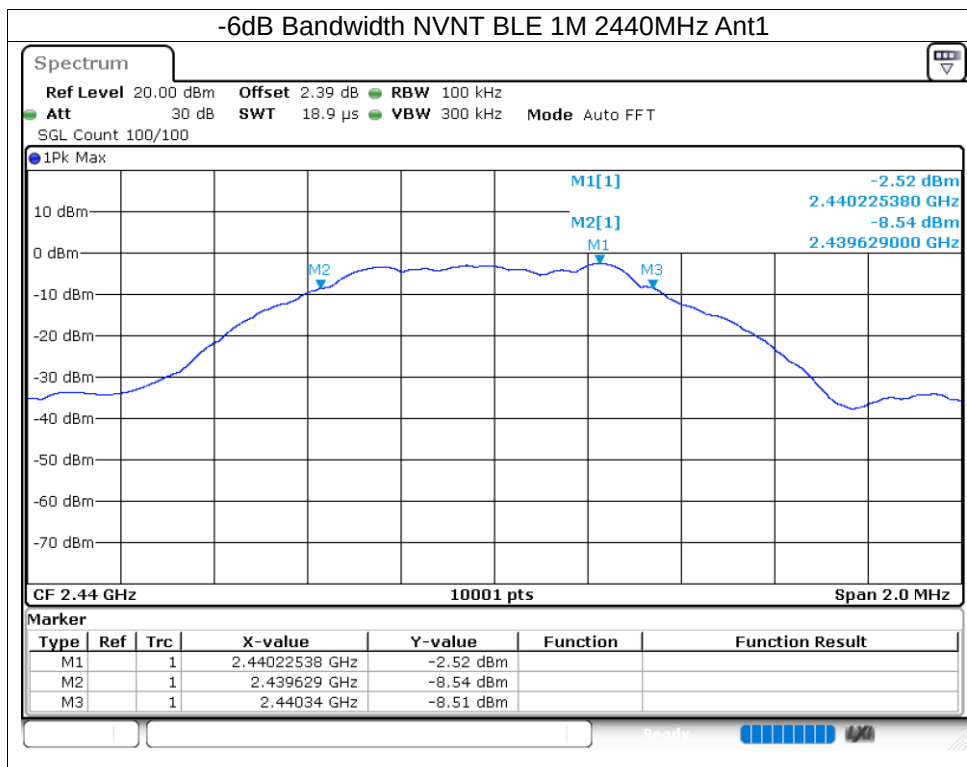

8.2.4 Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.015
NVNT	BLE 1M	2440	Ant1	1.021
NVNT	BLE 1M	2480	Ant1	1.019


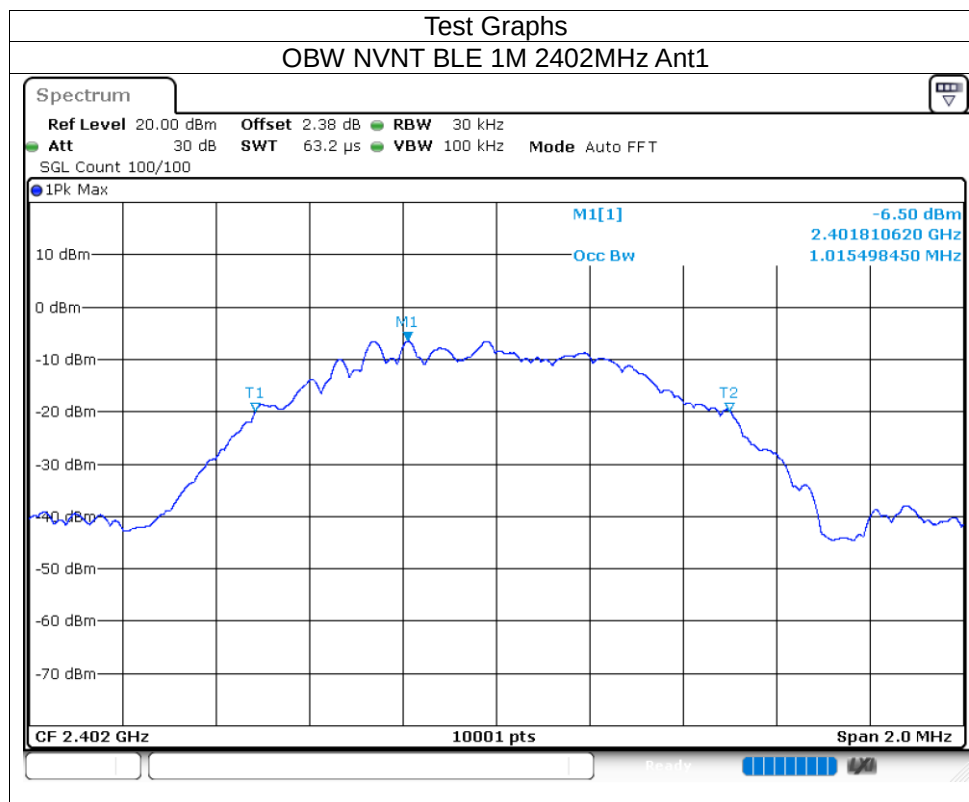


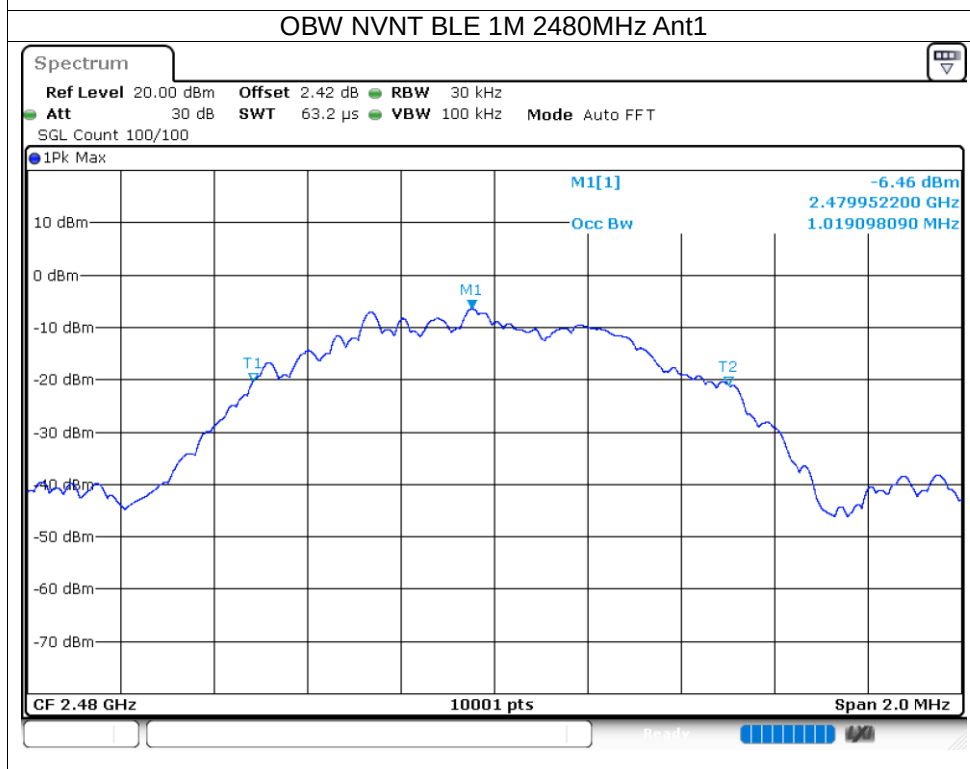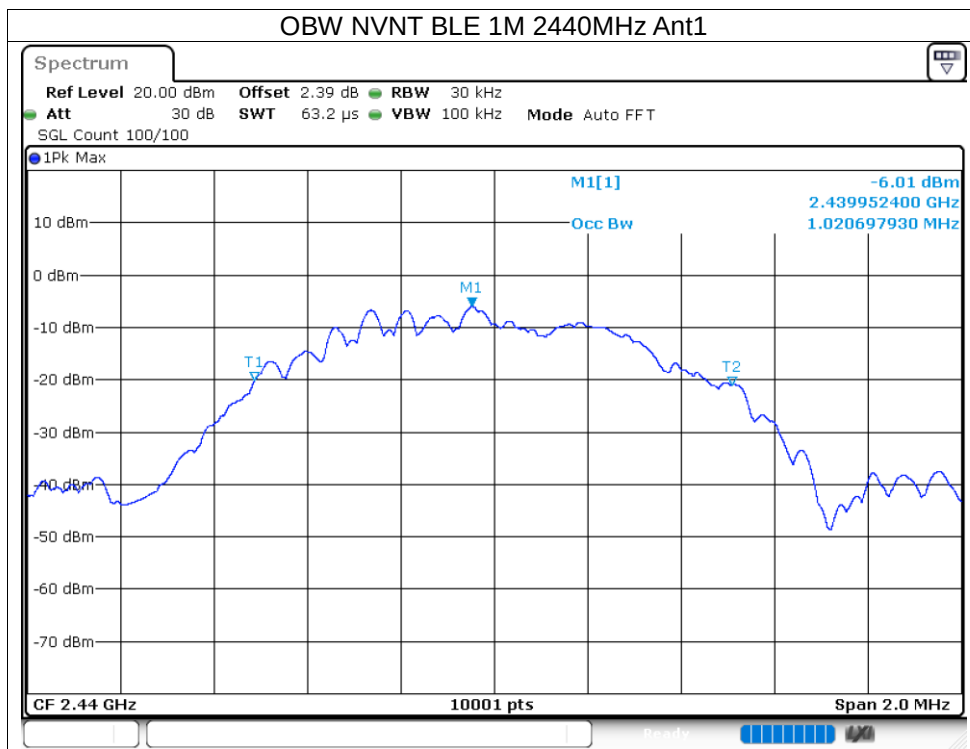

8.2.5 Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-16.96	8	Pass
NVNT	BLE 1M	2440	Ant1	-17.16	8	Pass
NVNT	BLE 1M	2480	Ant1	-17.58	8	Pass


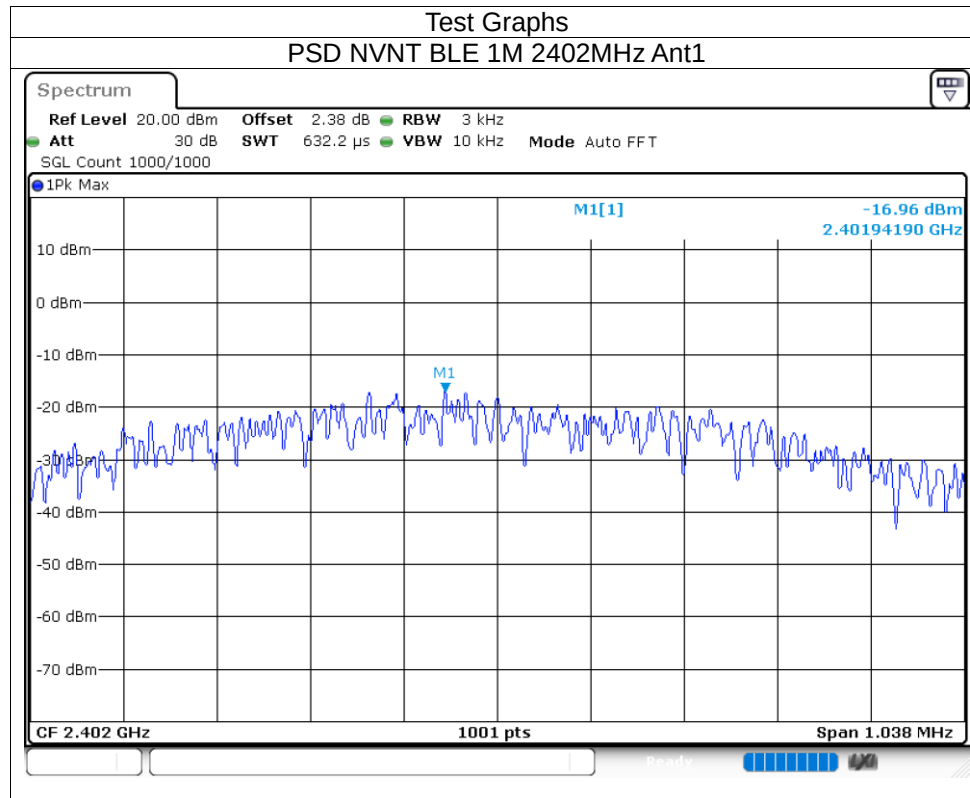


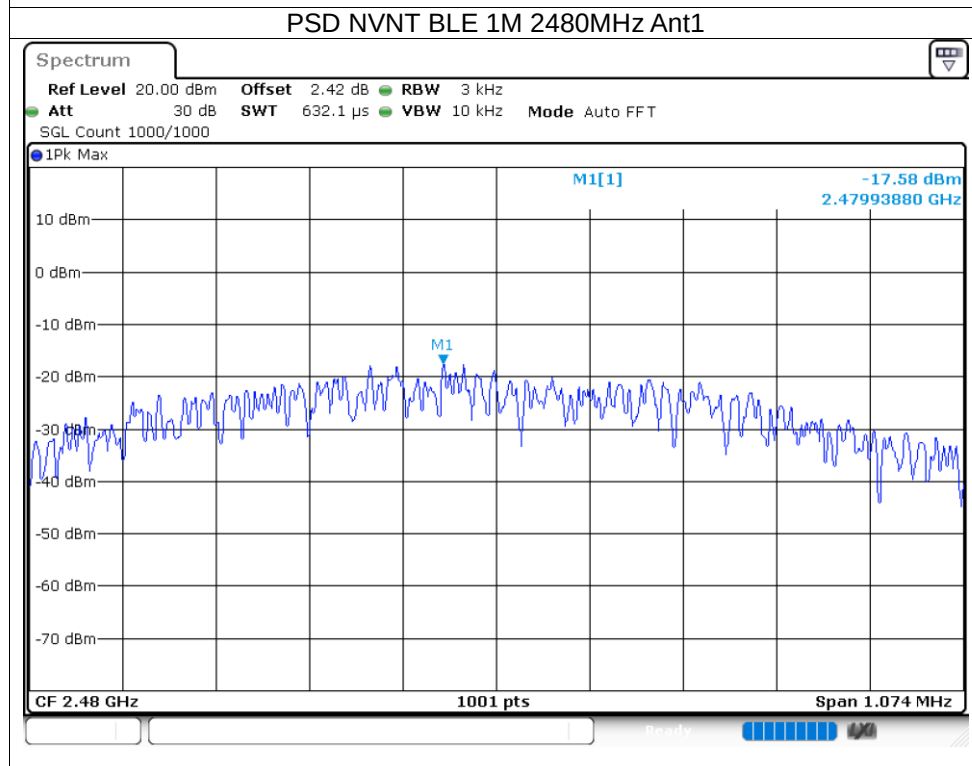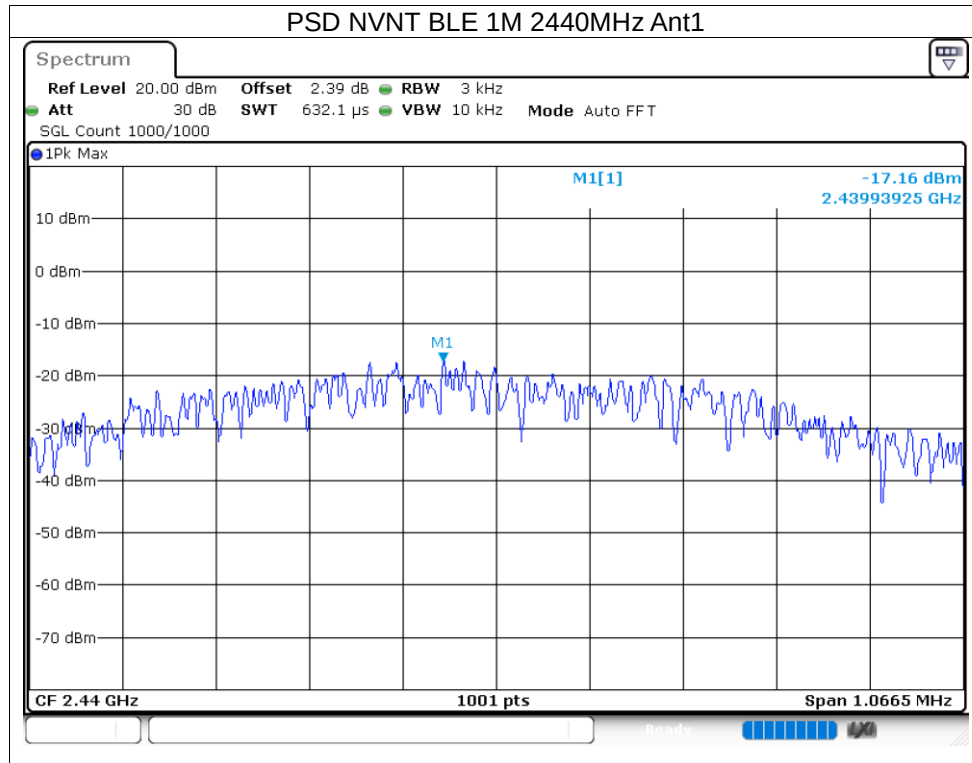

8.2.6 Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-56.53	-20	Pass
NVNT	BLE 1M	2480	Ant1	-45.03	-20	Pass


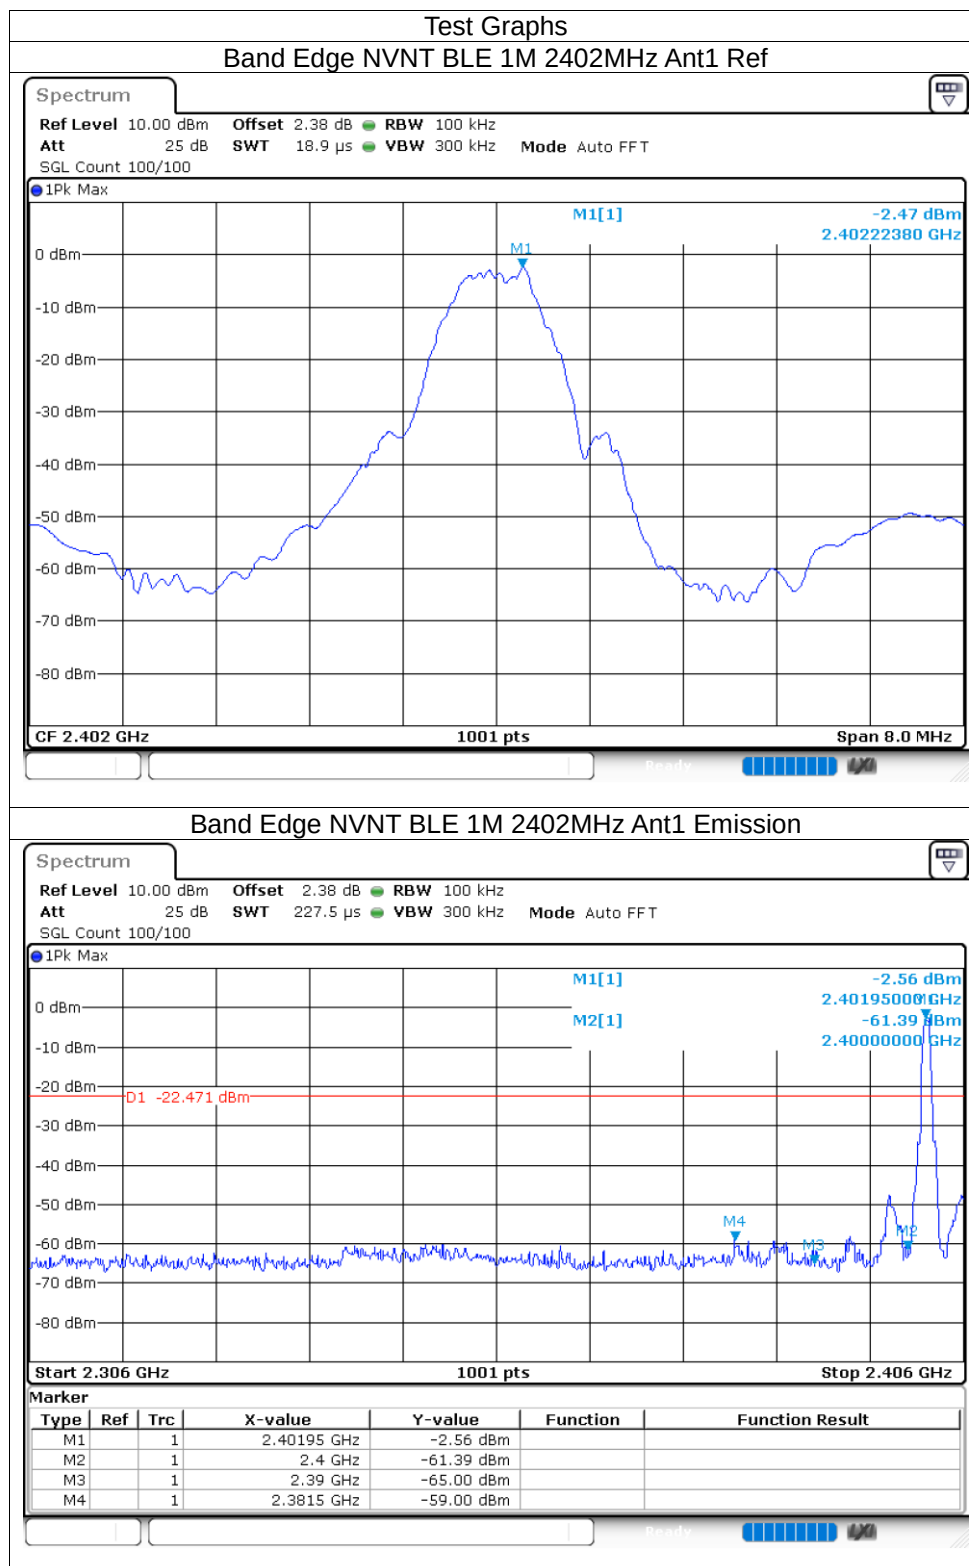


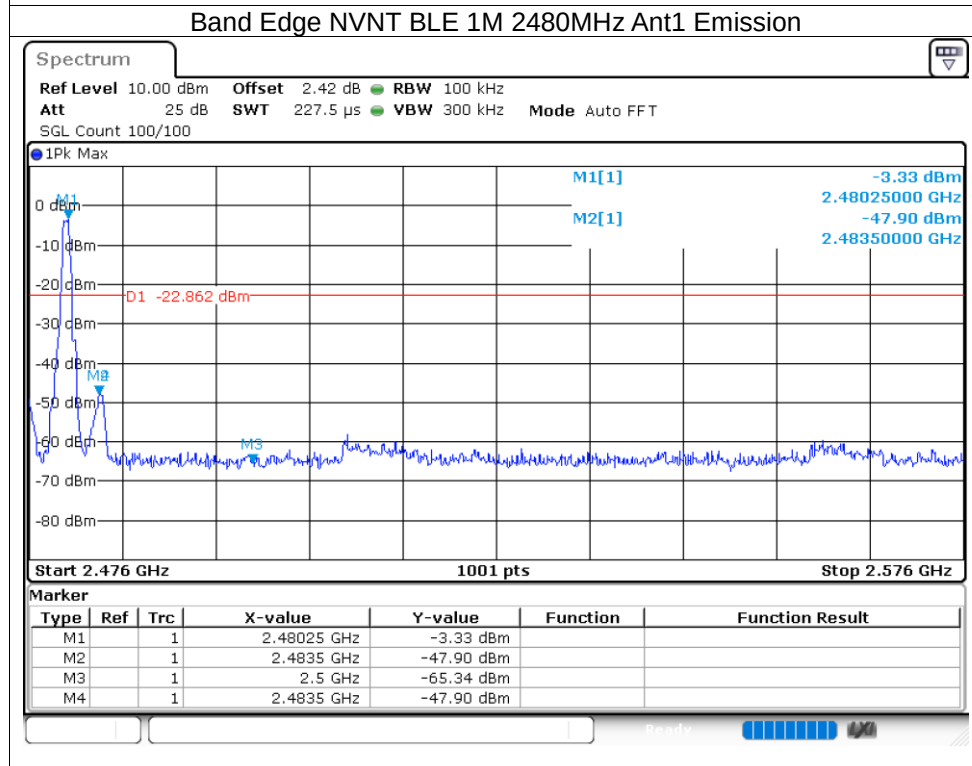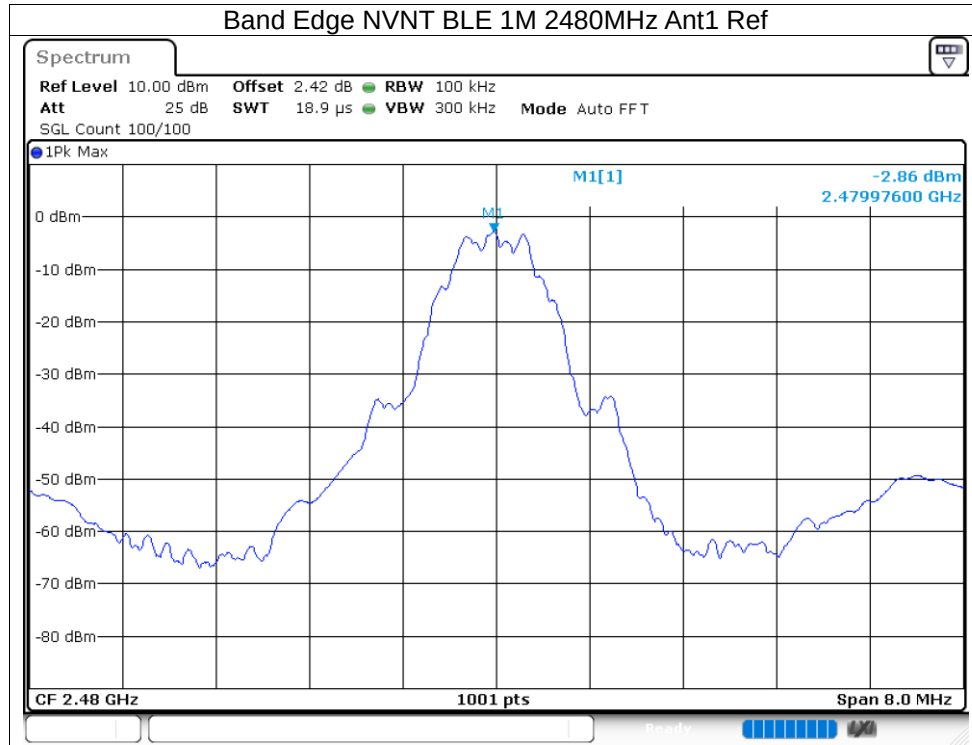


8.2.7 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-48.68	-20	Pass
NVNT	BLE 1M	2440	Ant1	-47.25	-20	Pass
NVNT	BLE 1M	2480	Ant1	-47.44	-20	Pass

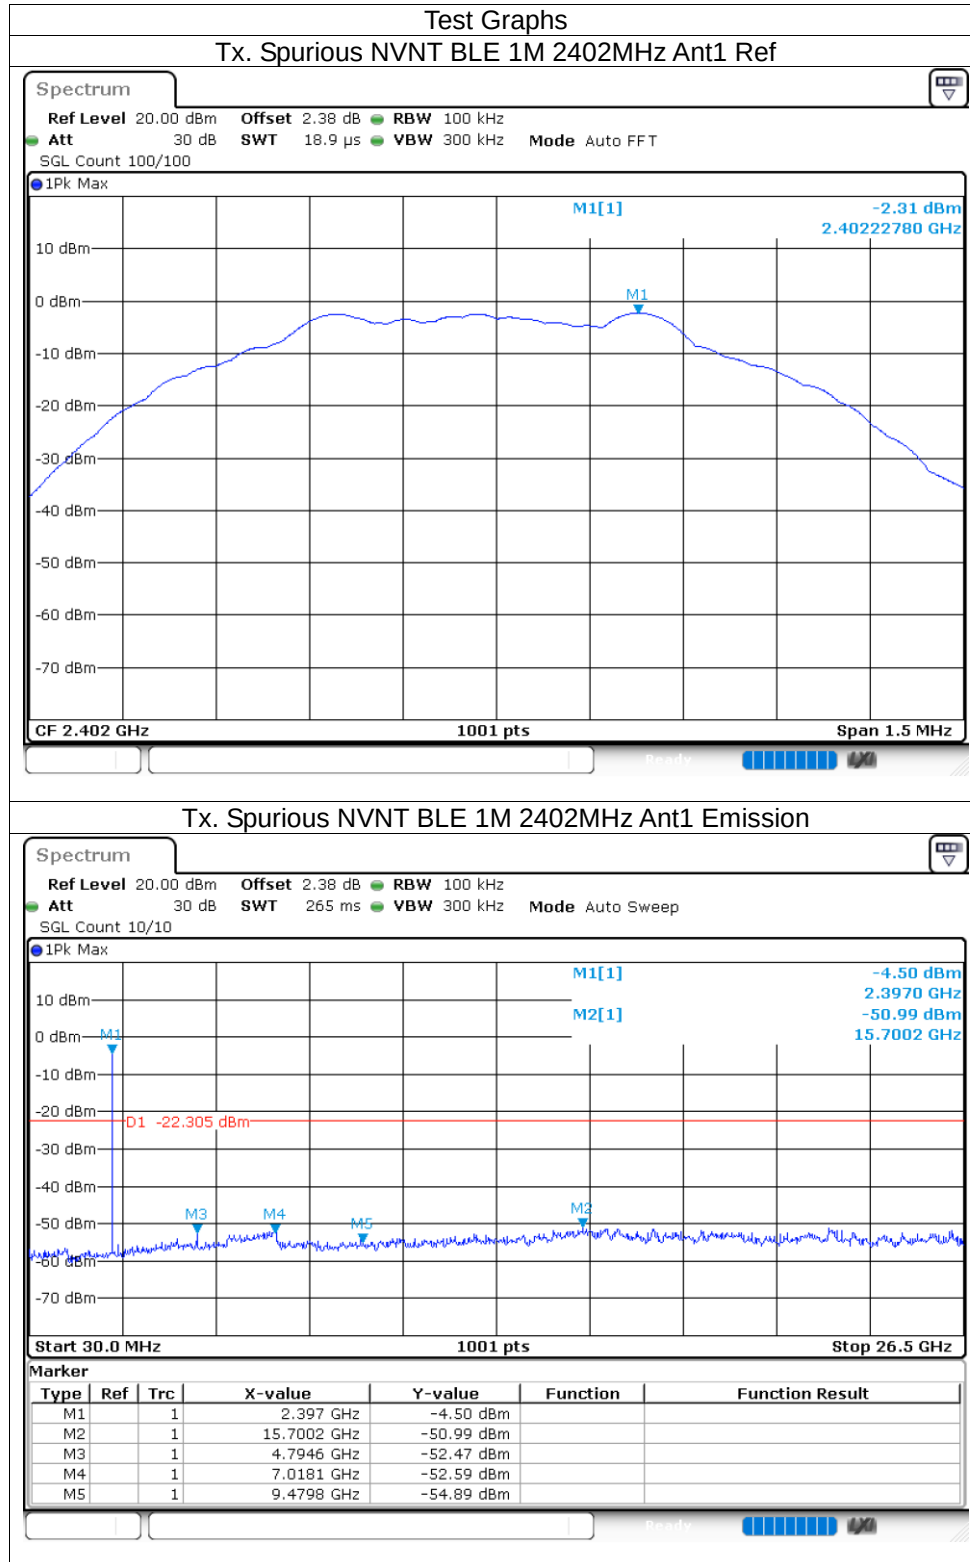

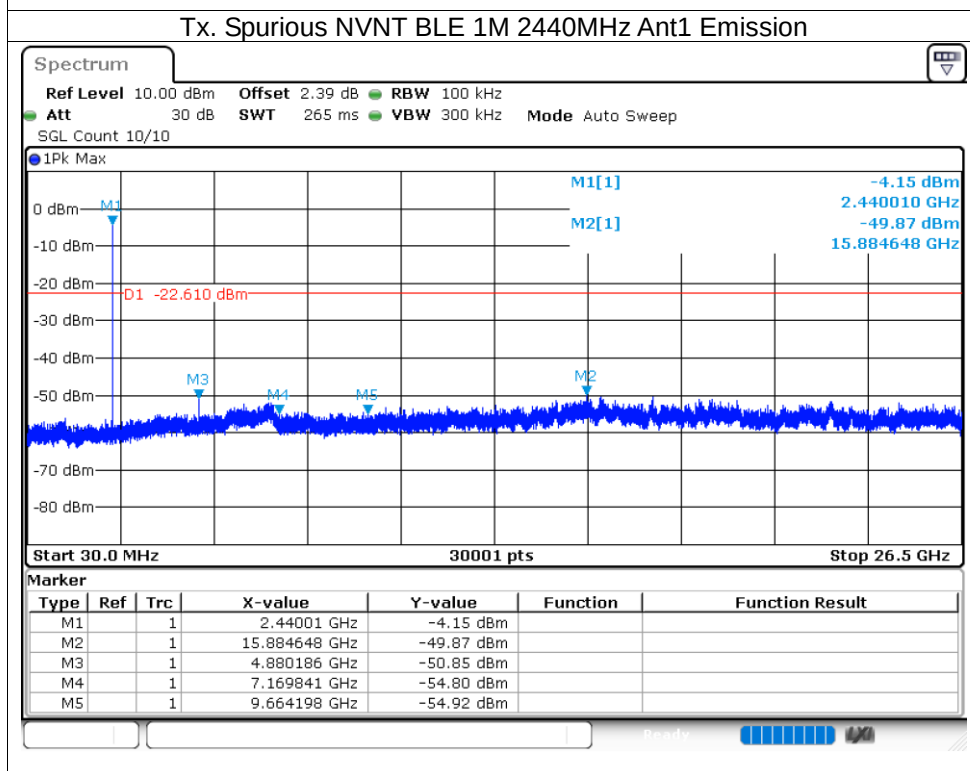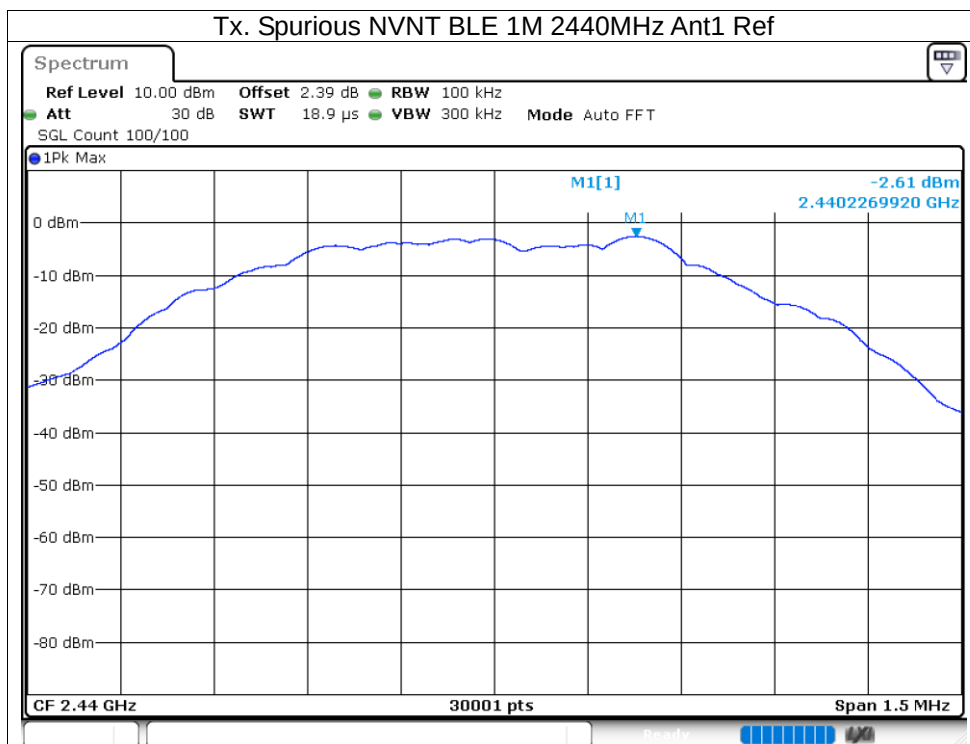

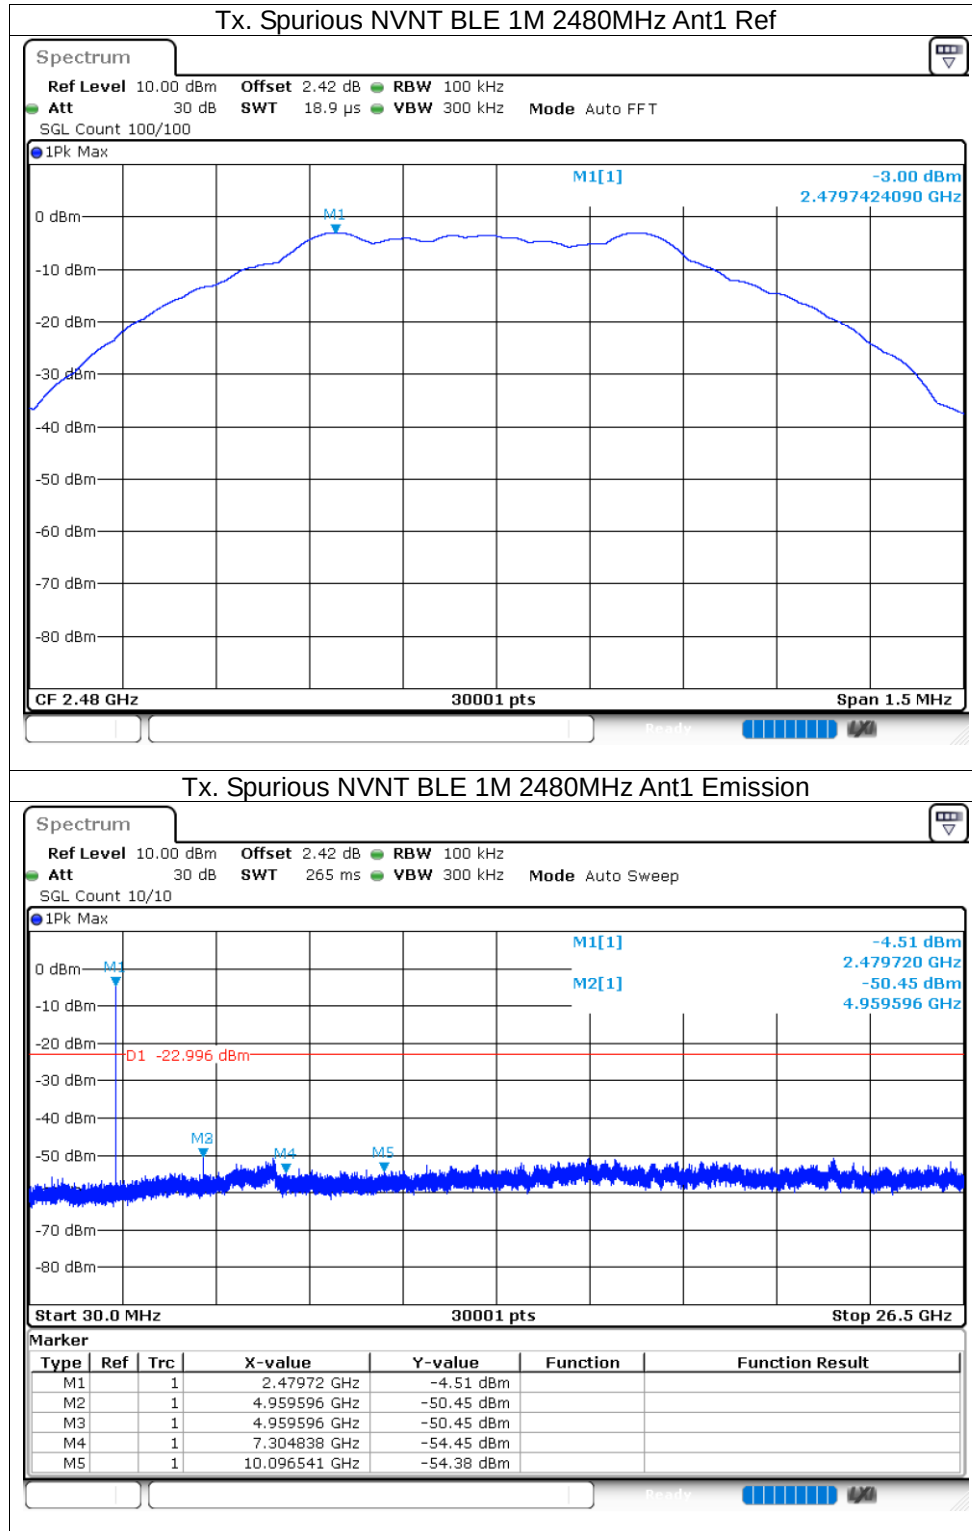

END OF REPORT