

承认书

SPECIFICATION FOR APPROVEAL

客户名称(CUSTOMER): ZLGD-A1-0325

客户料号(PART NO.): ZLGD-Y13×39.5-5-FR

品名(DESCRIPTION): 线圈+磁片 Coil + diskette

规格(SPECIFICATION): 13x39.5,0.08×105P, The magnetic edge is 5MM

日期 DATE: 20240422

本公司确认 (TRX APPROVAL)		
制作 manufacture	审核 examine	承认日期 date
曾小仙	邱志辉	20240422
客户确认 (CUSTOMER APPROVAL)		
工程 ENGINEERING	批准 Give permission to	承认日期 date
确认结果(Result): ☐ 合格 ☐ 不合格 ☐ 其它		

东莞市德弗力五金电子材料有限公司

Dongguan city DFL Electronic Technology Co.,LTD

东莞市石碣镇新风西路107号


电话: 0769-86016320 传真: 0769-86372427

东莞市德弗力五金电子材料有限公司
Dongguan city DFL Electronic Technology Co.,LTD

SPECIFICATION

产品型号: DESC	ZLGD-Y13×39.5-5-FR	版本 Rev:A	Customer:	ZLGD-A1-0325
			Description:	线圈+磁片
			Date:	20240422

一、尺寸DIMENSION:(mm)

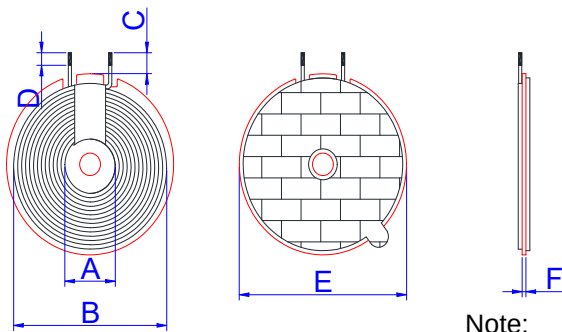

A	13.0±1.0
B	39.5±1.5
C	5.0±2.0
D	3.0±2.0
E	43.2MAX
F	0.8±0.15
G	
H	
I	
J	
K	
L	
M	
N	
O	
P	

Note:

1. The coil is attached with G43.2MAX*0.8 hard magnetic
2. Wrap 8MM of high-temperature tape around the cable outlet position
3. Attach double-sided tape with ear on the back of the magnetic disc
4. Coil can not be loosened, press the wire

二、天线增益Antenna gain :

Operation frequency:	113kHz-205kHz
Antenna Type:	Loop coil Antenna
Antenna gain:	0dBi

三、绕线参数(Winding Specification:)

序号 NO.	端子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1		0.08×105P丝包线	13TS	逆时针

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C,湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.		7.4uH±10%加磁片	100KHz/1.0V	SHDA 1062
2	IND.				
3	Q值				
4	DCR				

拟制/日期PREPARED BY/DATE	审核/日期CHECKED BY/DATE	客户/日期CUSTOMER/DATE