






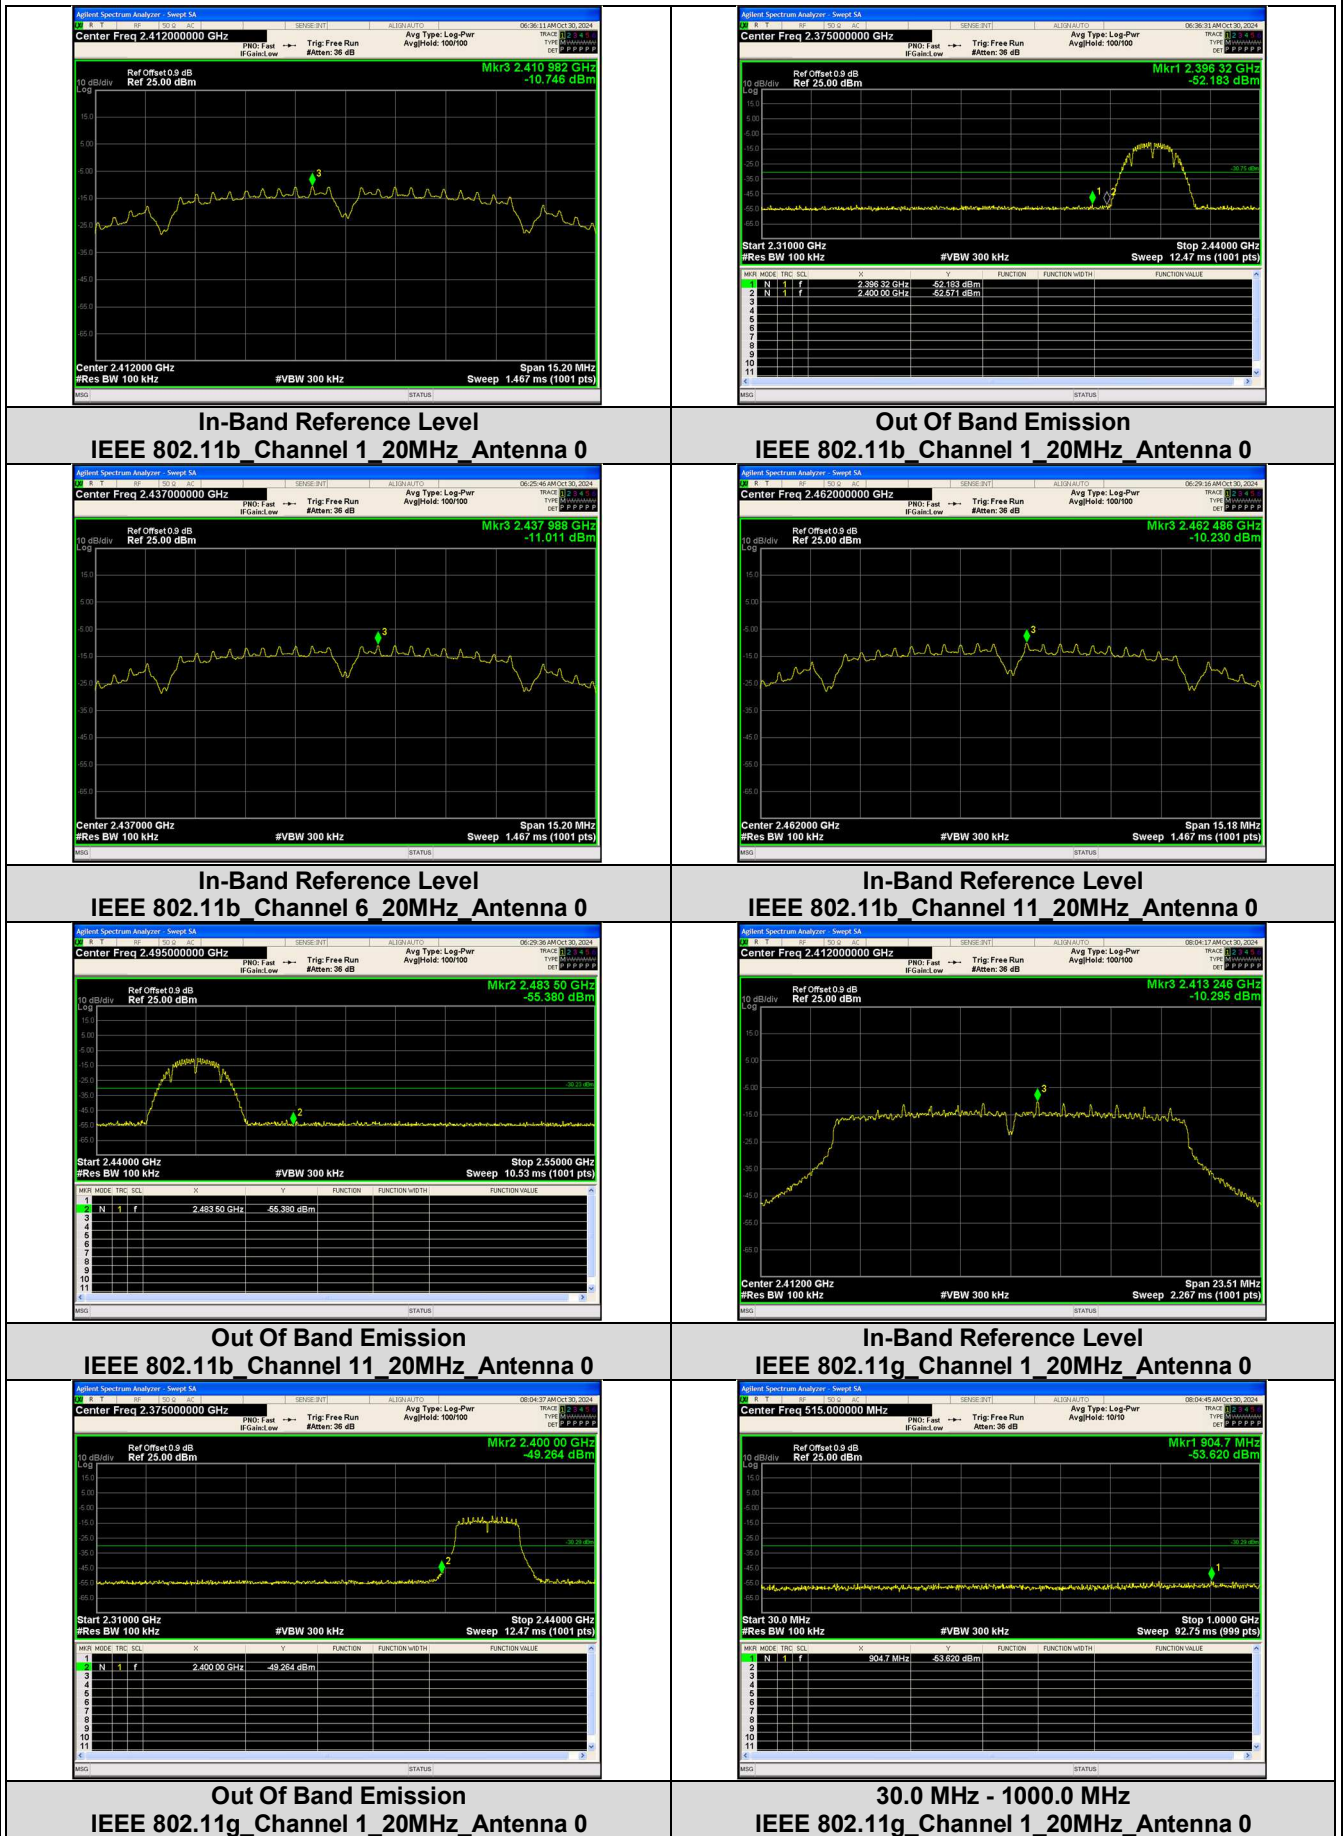

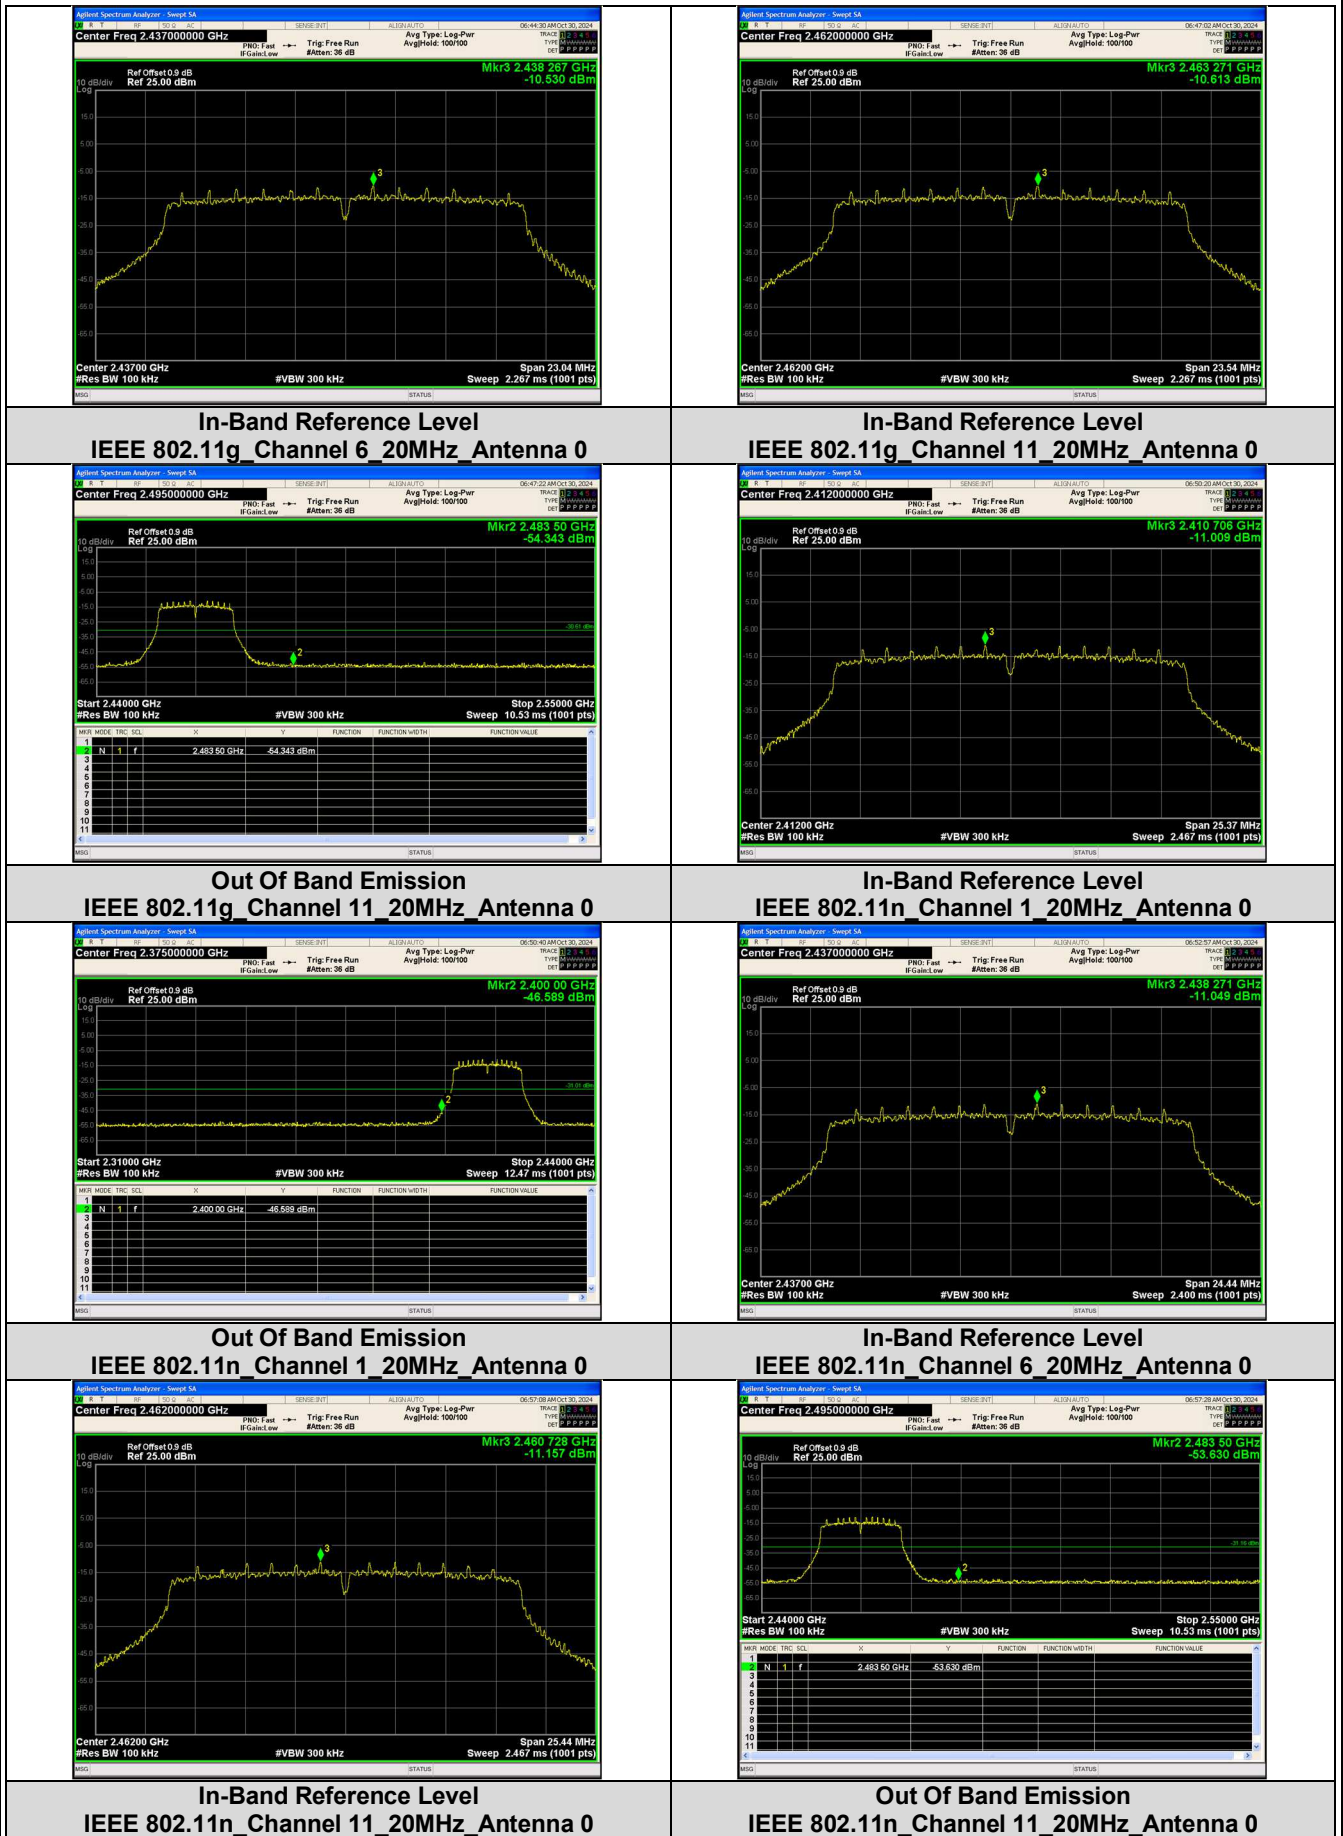

In-Band Reference Level
IEEE 802.11n Channel 3 40MHz Antenna 0

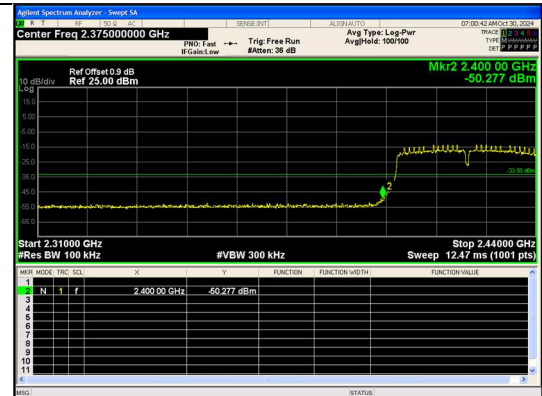


Out Of Band Emission
IEEE 802.11n Channel 3 40MHz Antenna 0



In-Band Reference Level
IEEE 802.11n Channel 6 40MHz Antenna 0



In-Band Reference Level
IEEE 802.11n Channel 9 40MHz Antenna 0

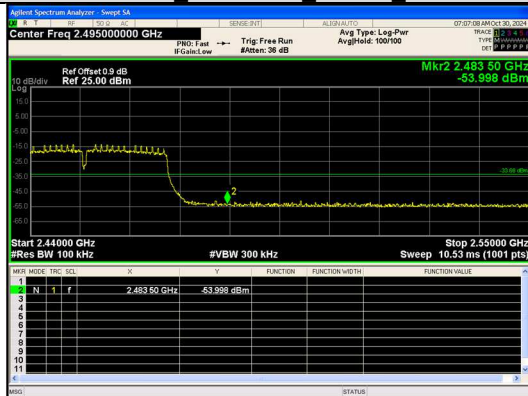

Out Of Band Emission
IEEE 802.11n Channel 9 40MHz Antenna 0

Appendix B.5: Test Results of Power Spectral Density


Test Result


Mode	Channel	PSD (dBm/3kHz) Ant. 0	PSD (dBm/3kHz) Ant. 1	PSD (dBm/3kHz) Ant. MIMO	Limit (dBm/3kHz)	Result
IEEE 802.11b	1	-24.973	-28.256	-23.301	≤8	PASS
	6	-24.993	-29.332	-23.631		PASS
	11	-23.429	-29.116	-22.391		PASS
IEEE 802.11g	1	-25.012	-25.116	-22.053		PASS
	6	-24.279	-26.214	-22.129		PASS
	11	-24.320	-27.133	-22.492		PASS
IEEE 802.11n_20	1	-24.524	-25.110	-21.797		PASS
	6	-25.338	-26.276	-22.771		PASS
	11	-25.124	-26.787	-22.866		PASS
IEEE 802.11n_40	3	-25.229	-28.796	-23.646		PASS
	6	-27.920	-29.872	-25.777		PASS
	9	-27.135	-29.998	-25.324		PASS


Test Result

Mode	Channel	PSD (dBm/3kHz) Ant. 0	Limit (dBm/3kHz)	Result
IEEE 802.11b	1	-24.973	≤8	PASS
	6	-24.993		PASS
	11	-23.429		PASS
IEEE 802.11g	1	-25.012		PASS
	6	-24.279		PASS
	11	-24.320		PASS
IEEE 802.11n_20	1	-24.524		PASS
	6	-25.338		PASS
	11	-25.124		PASS
IEEE 802.11n_40	3	-25.229		PASS
	6	-27.920		PASS
	9	-27.135		PASS

Test Graphs

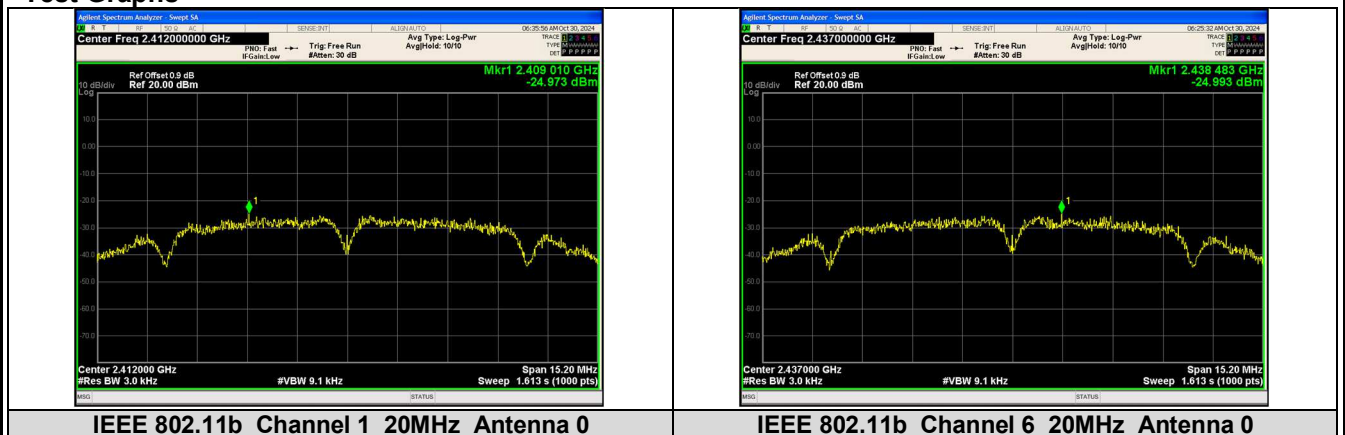

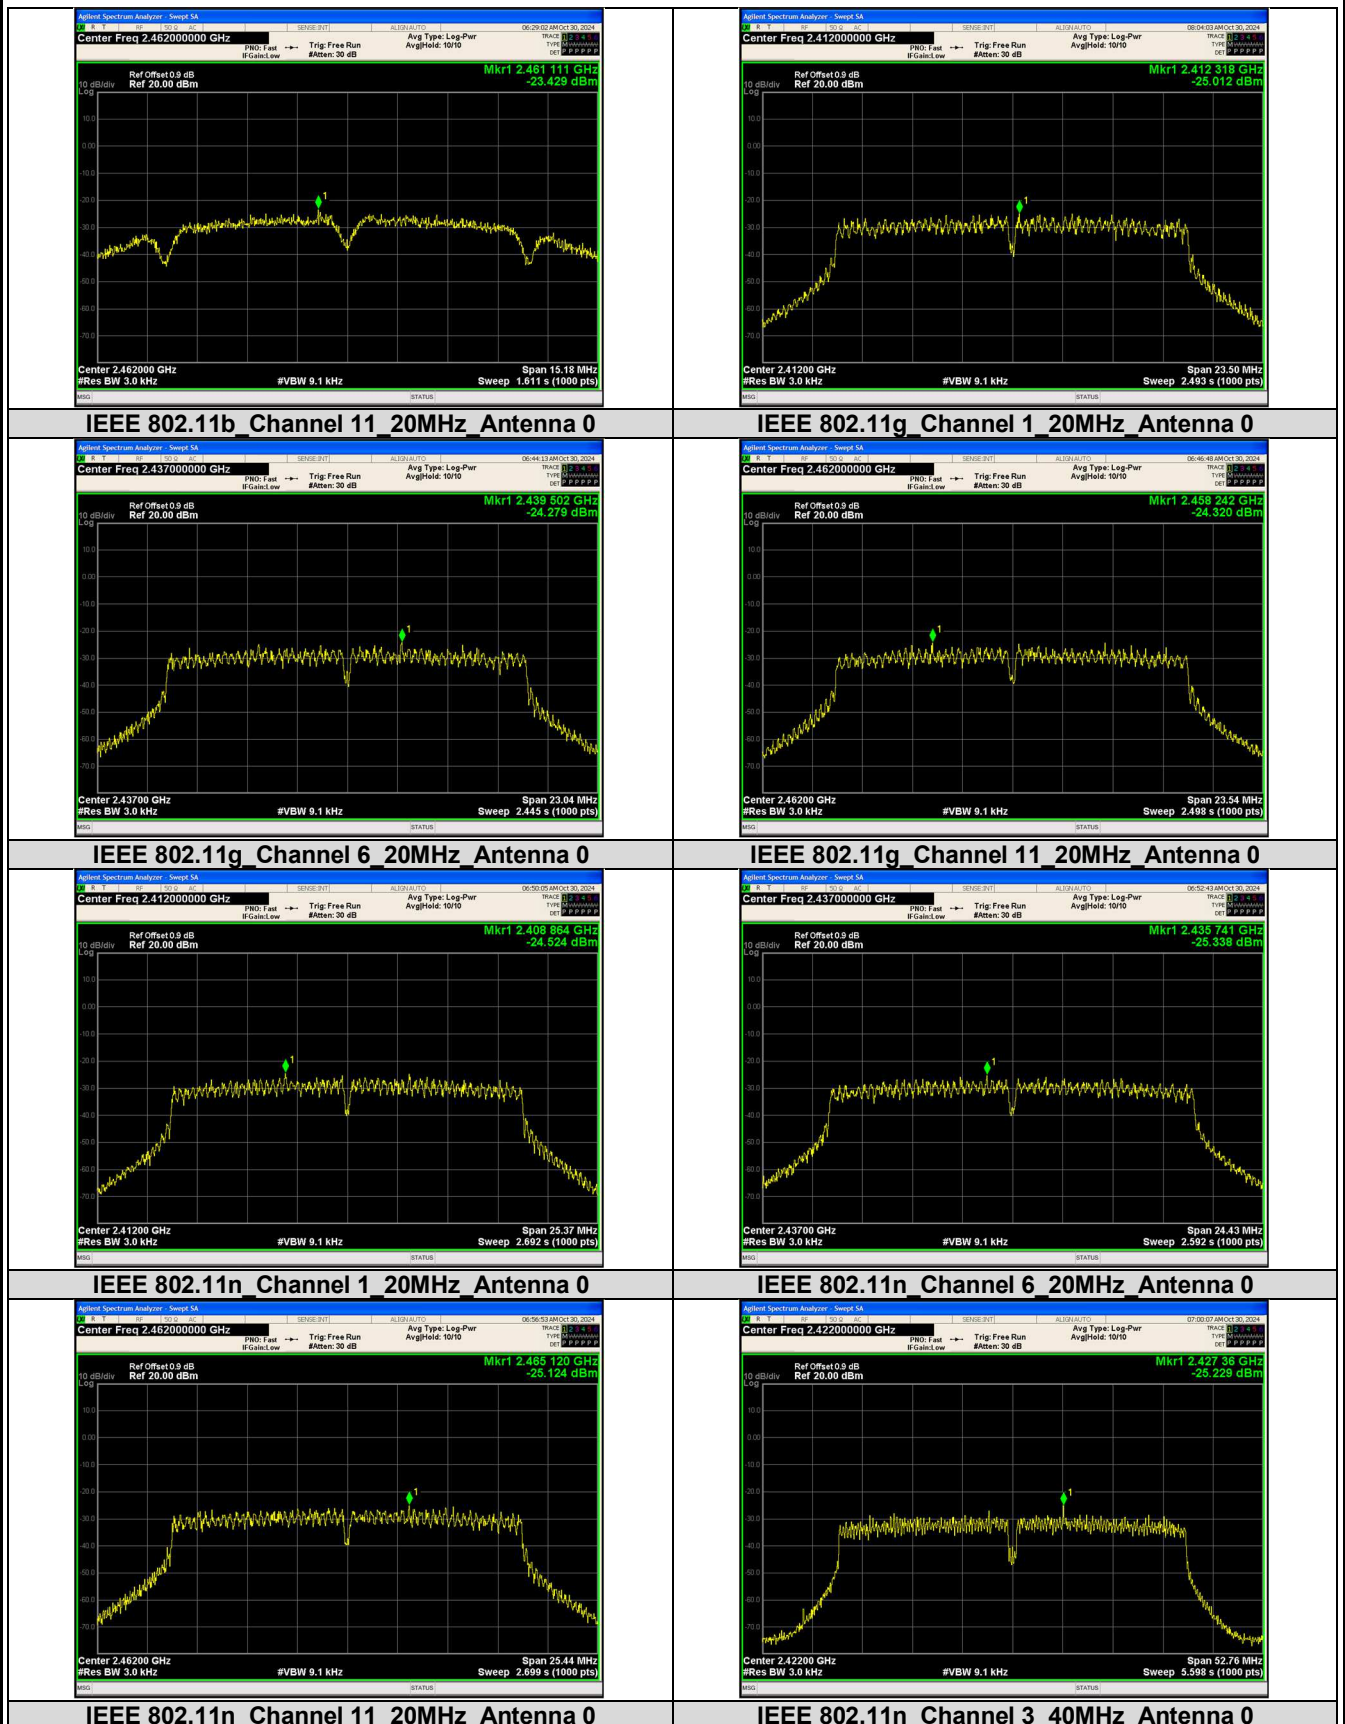


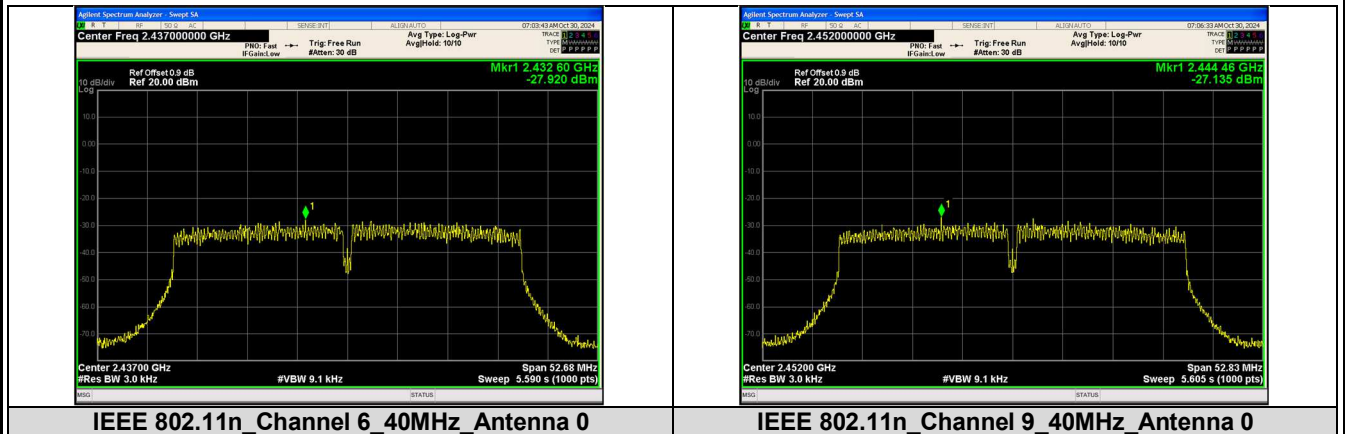


Test Result

Mode	Channel	PSD (dBm/3kHz) Ant. 1	Limit (dBm/3kHz)	Result
IEEE 802.11b	1	-28.256	≤8	PASS
	6	-29.332		PASS
	11	-29.116		PASS
IEEE 802.11g	1	-25.116		PASS
	6	-26.214		PASS
	11	-27.133		PASS
IEEE 802.11n_20	1	-25.110		PASS
	6	-26.276		PASS
	11	-26.787		PASS
IEEE 802.11n_40	3	-28.796		PASS
	6	-29.872		PASS
	9	-29.998		PASS

Test Graphs

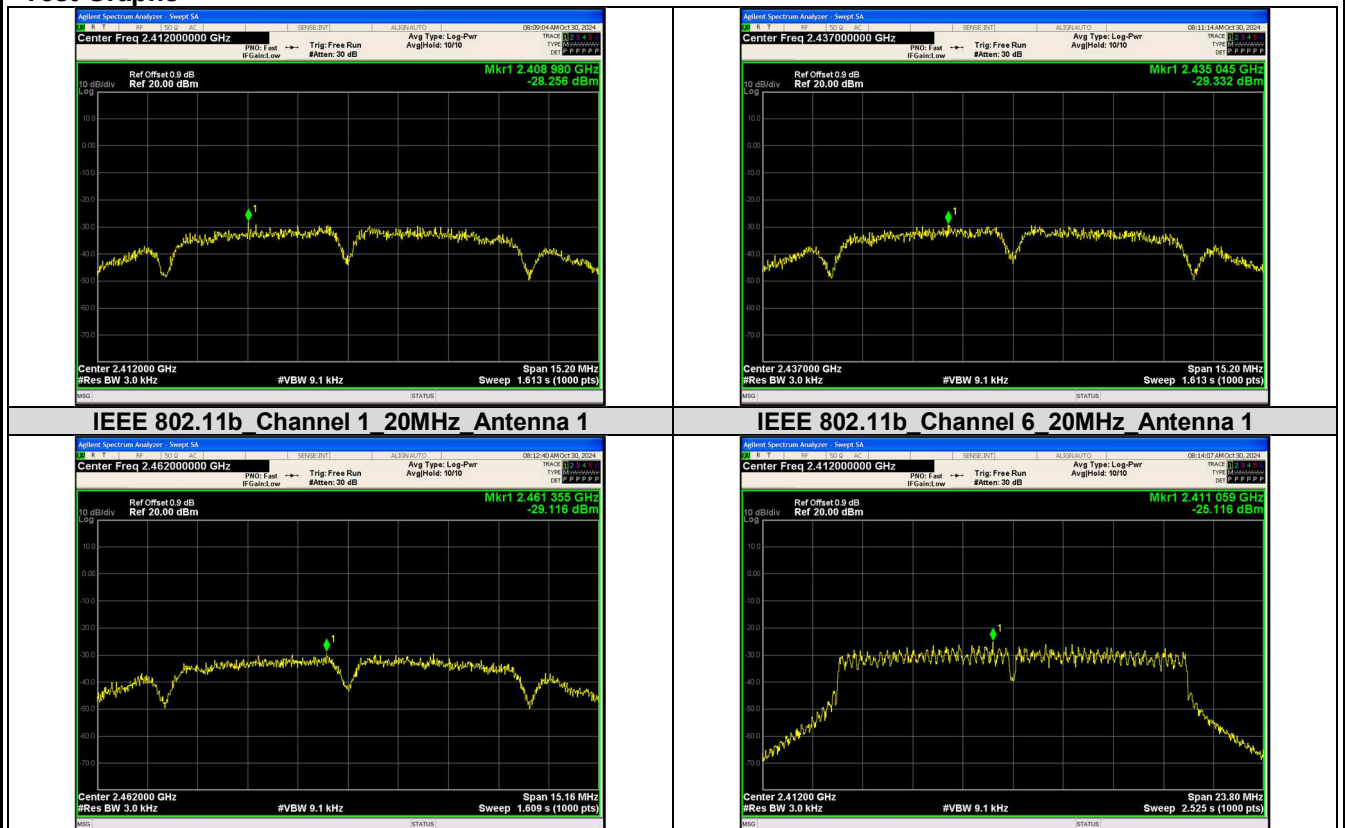

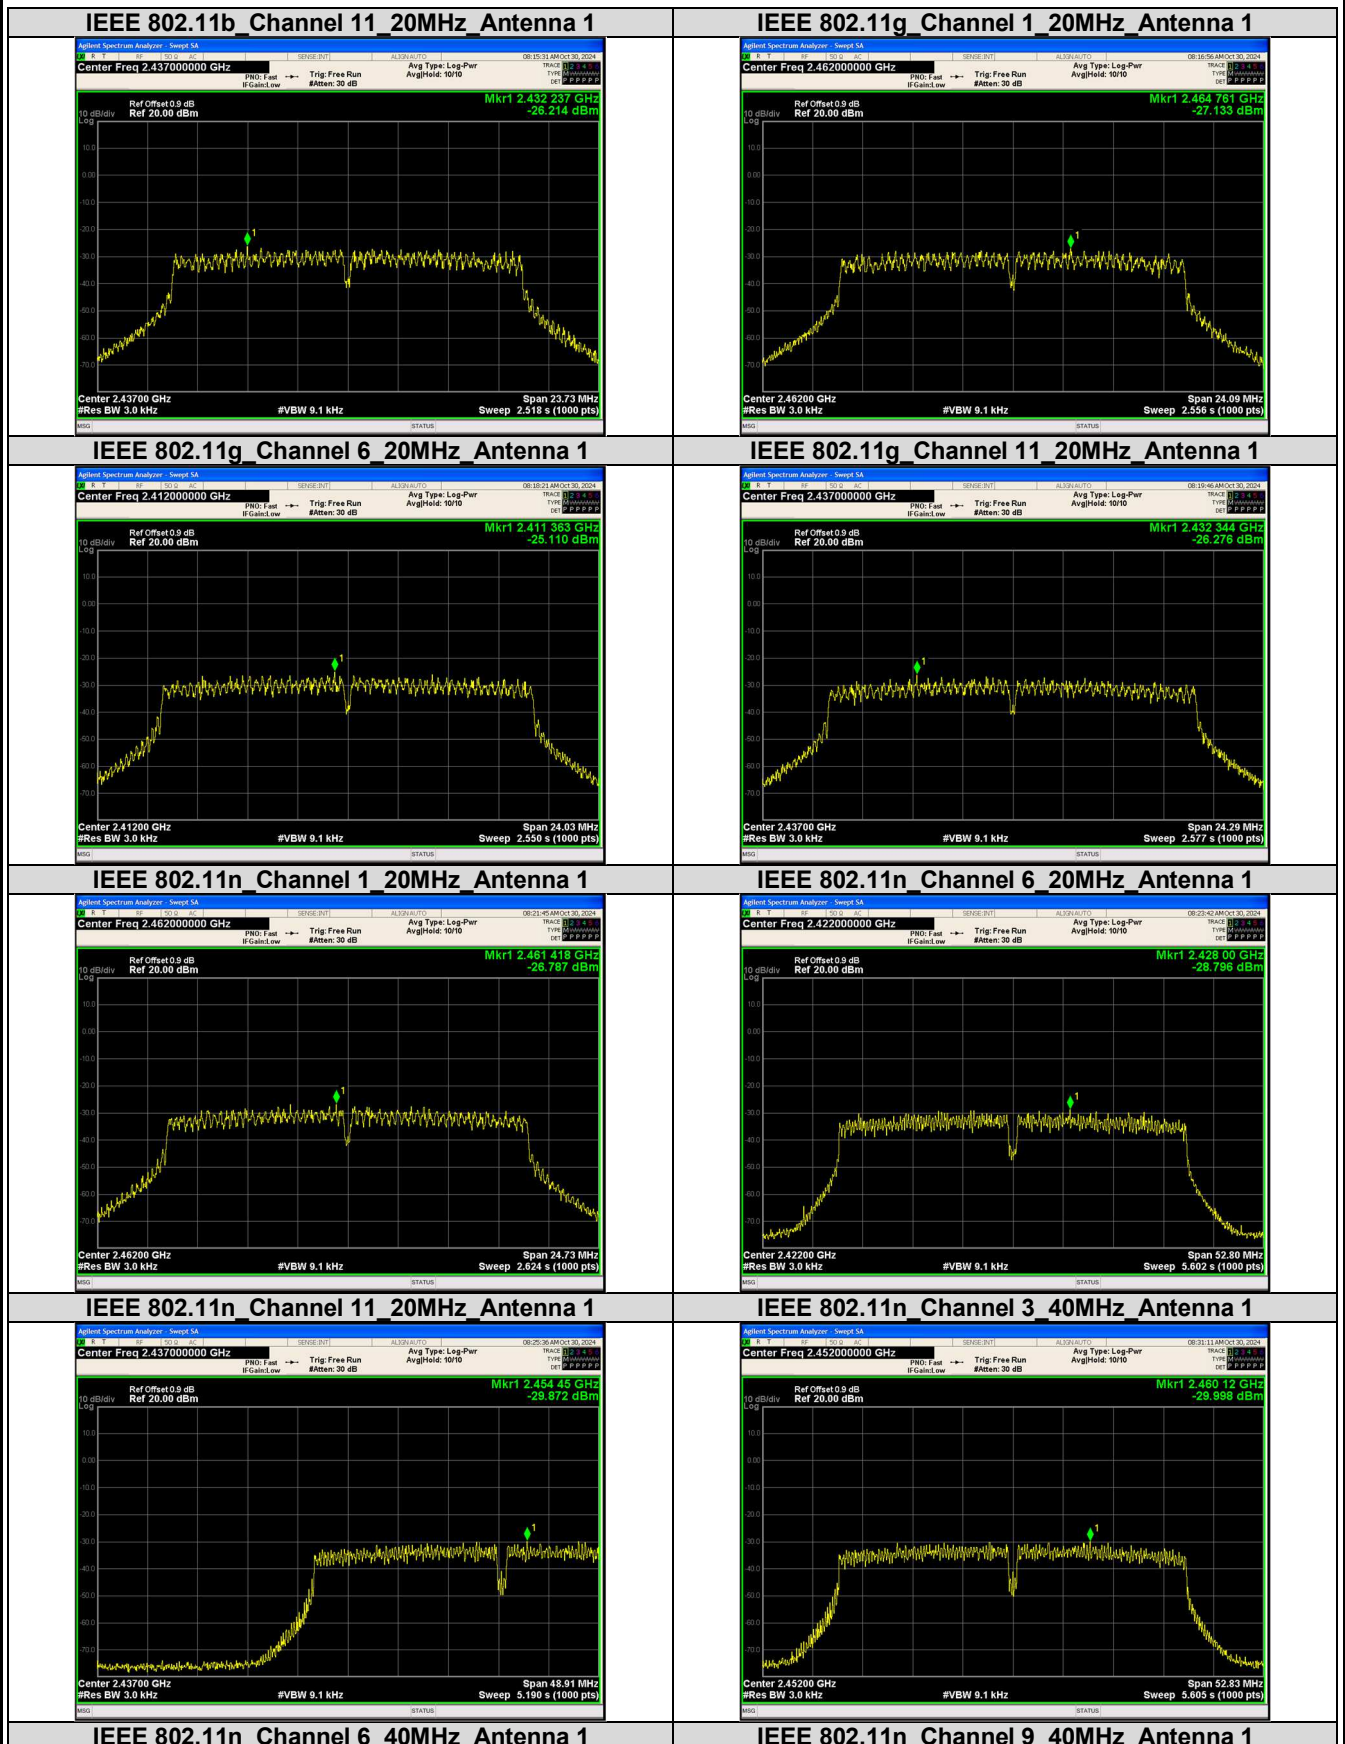


Appendix B.6: Test Results of Radiated Spurious Emissions

Note:

- 1) This testing was carried out on different modulations and channels, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.


30 MHz - 1GHz

802.11 b, ANT Polarization: Horizontal

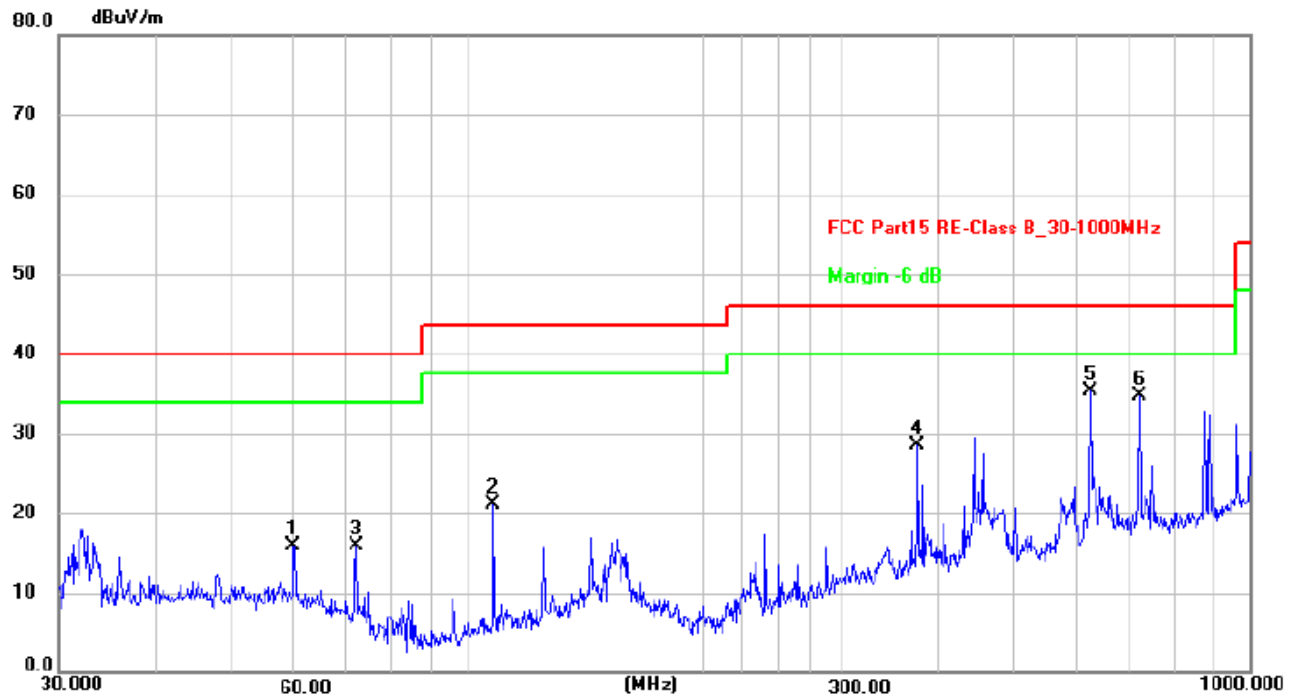

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	59.8588	45.21	-29.36	15.85	40.00	-24.15	peak	150	360	P	
2	107.8877	53.56	-32.48	21.08	43.50	-22.42	peak	150	360	P	
3	72.0843	47.61	-31.77	15.84	40.00	-24.16	peak	150	360	P	
4	375.9385	55.25	-26.72	28.53	46.00	-17.47	peak	150	360	P	
5 *	625.0780	56.17	-20.84	35.33	46.00	-10.67	peak	150	360	P	
6	721.7259	53.83	-19.16	34.67	46.00	-11.33	peak	150	360	P	

802.11 b, ANT Polarization: Vertical

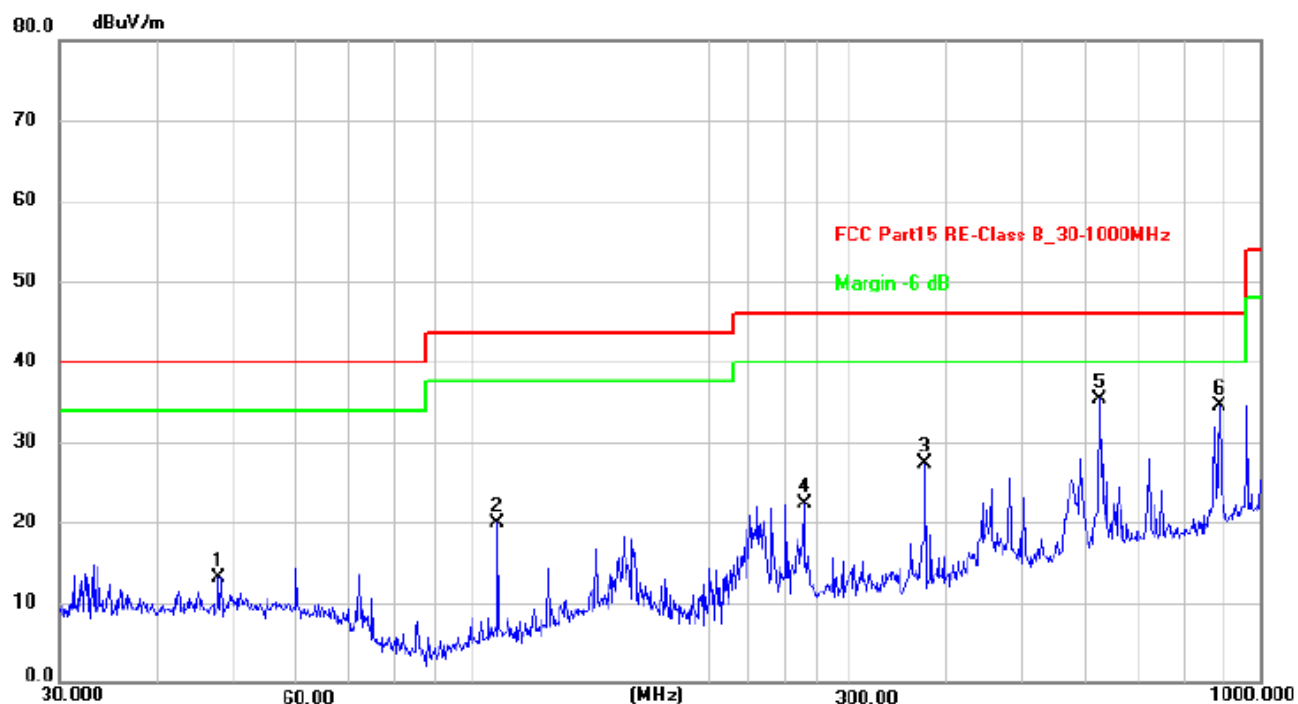


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	47.8260	42.12	-28.99	13.13	40.00	-26.87	peak	150	0	P	
2	107.8877	52.41	-32.48	19.93	43.50	-23.57	peak	150	0	P	
3	375.9385	54.02	-26.72	27.30	46.00	-18.70	peak	150	0	P	
4	263.8190	52.18	-29.83	22.35	46.00	-23.65	peak	150	0	P	
5 *	625.0780	56.18	-20.84	35.34	46.00	-10.66	peak	150	0	P	
6	887.6099	51.41	-16.99	34.42	46.00	-11.58	peak	150	0	P	

1GHz - 18GHz


Note: The highest waveform in the figure is Fundamental.

802.11 b, ANT Polarization: Horizontal

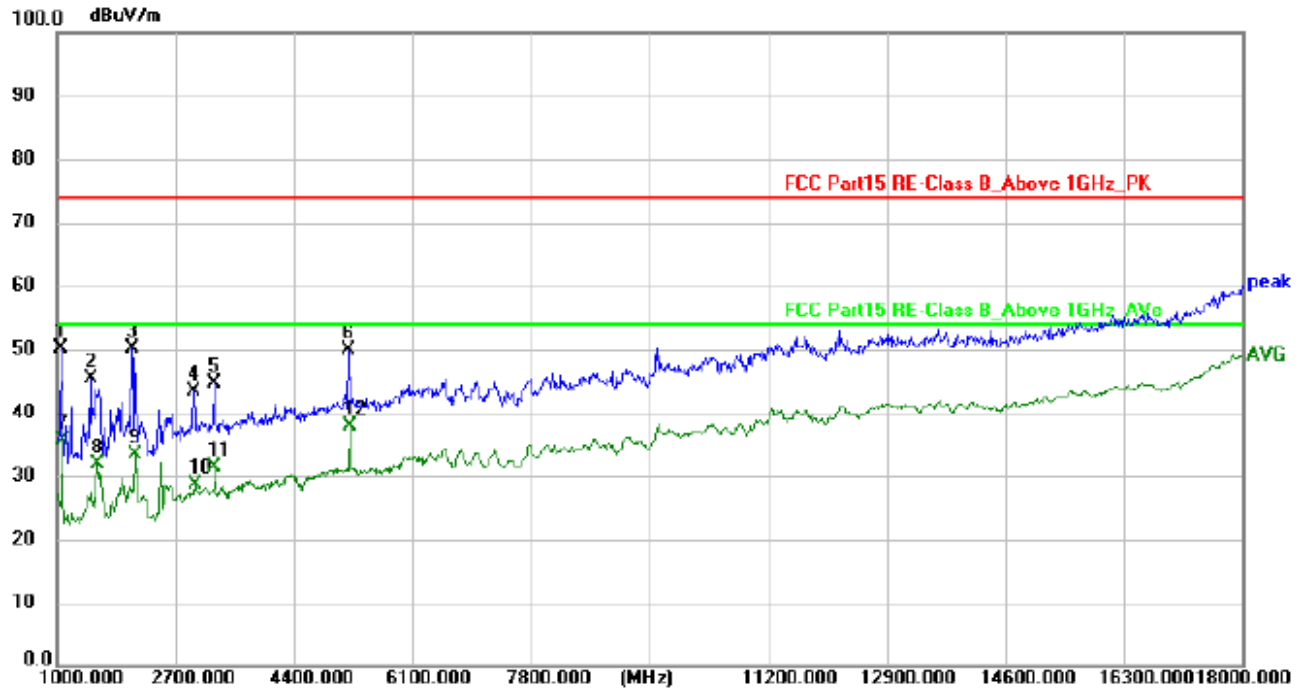


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1051.000	71.15	-20.99	50.16	74.00	-23.84	peak	150	0	P	
2	1476.000	65.10	-19.81	45.29	74.00	-28.71	peak	150	0	P	
3	2071.000	67.08	-16.94	50.14	74.00	-23.86	peak	150	0	P	
4	2955.000	56.15	-12.80	43.35	74.00	-30.65	peak	150	0	P	
5	3244.000	56.39	-11.77	44.62	74.00	-29.38	peak	150	0	P	
6	5182.000	54.55	-4.78	49.77	74.00	-24.23	peak	150	0	P	
7	1068.000	56.53	-20.91	35.62	54.00	-18.38	AVG	150	0	P	
8	1578.000	51.77	-19.83	31.94	54.00	-22.06	AVG	150	0	P	
9	2122.000	49.99	-16.71	33.28	54.00	-20.72	AVG	150	0	P	
10	2972.000	41.29	-12.66	28.63	54.00	-25.37	AVG	150	0	P	
11	3261.000	43.08	-11.78	31.30	54.00	-22.70	AVG	150	0	P	
12 *	5199.000	42.74	-4.74	38.00	54.00	-16.00	AVG	150	0	P	

802.11 b, ANT Polarization: Vertical

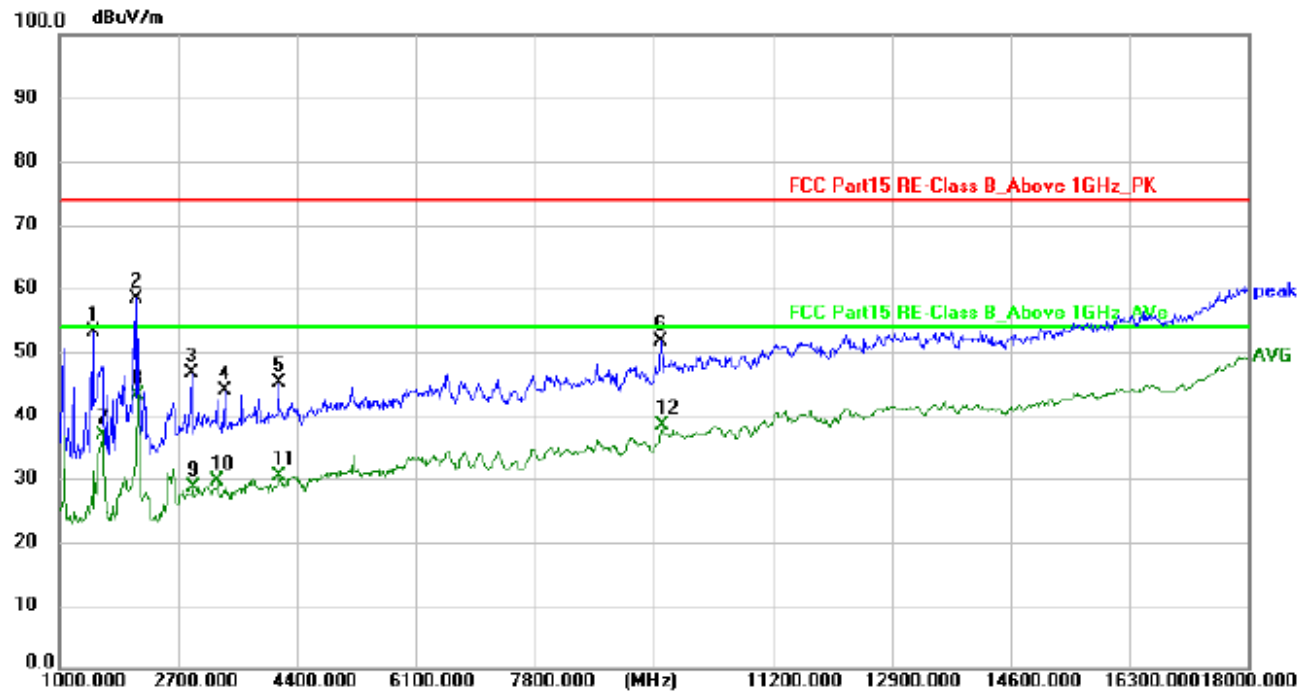


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1476.000	72.94	-19.81	53.13	74.00	-20.87	peak	150	360	P	
2	2105.000	75.21	-16.79	58.42	74.00	-15.58	peak	150	360	P	
3	2887.000	59.87	-13.35	46.52	74.00	-27.48	peak	150	360	P	
4	3363.000	55.66	-11.81	43.85	74.00	-30.15	peak	150	360	P	
5	4128.000	53.90	-8.77	45.13	74.00	-28.87	peak	150	360	P	
6	9602.000	47.18	4.38	51.56	74.00	-22.44	peak	150	360	P	
7	1612.000	56.78	-19.80	36.98	54.00	-17.02	AVG	150	360	P	
8 *	2122.000	59.94	-16.71	43.23	54.00	-10.77	AVG	150	360	P	
9	2904.000	41.86	-13.21	28.65	54.00	-25.35	AVG	150	360	P	
10	3261.000	41.52	-11.78	29.74	54.00	-24.26	AVG	150	360	P	
11	4145.000	39.19	-8.76	30.43	54.00	-23.57	AVG	150	360	P	
12	9619.000	34.00	4.41	38.41	54.00	-15.59	AVG	150	360	P	

802.11 g, ANT Polarization: Horizontal

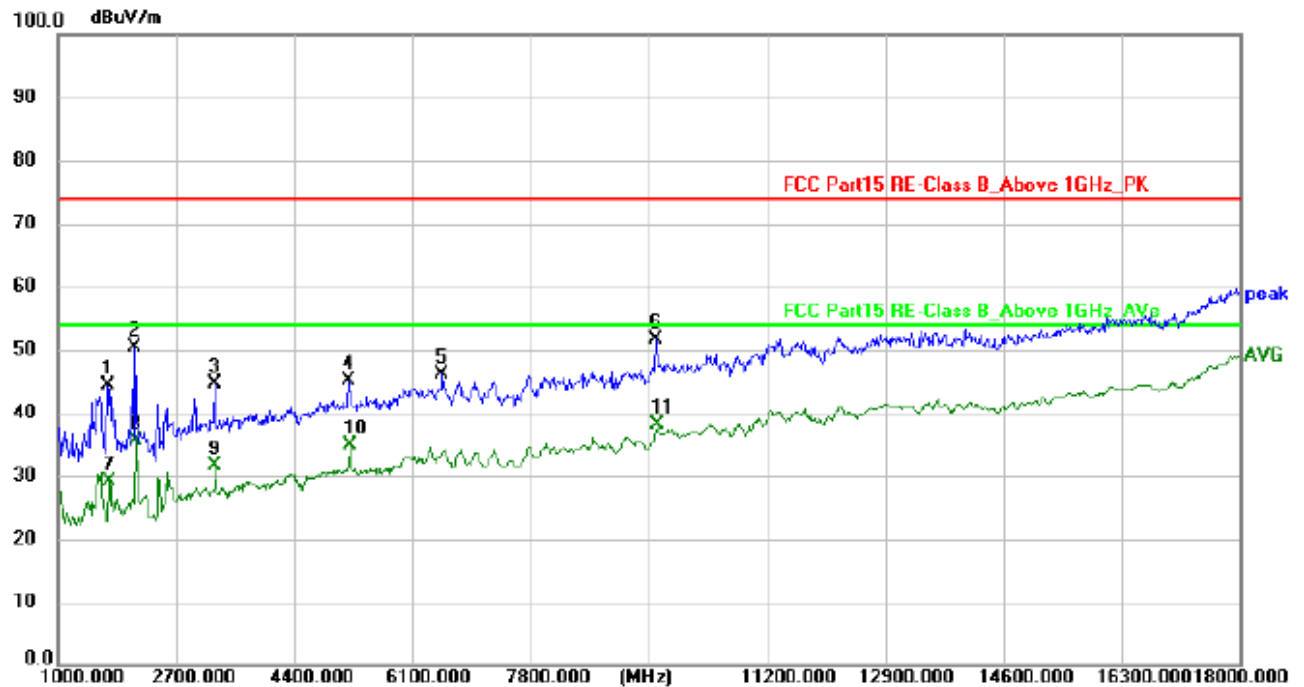


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1714.000	64.08	-19.61	44.47	74.00	-29.53	peak	150	360	P	
2	2105.000	67.16	-16.79	50.37	74.00	-23.63	peak	150	360	P	
3	3244.000	56.48	-11.77	44.71	74.00	-29.29	peak	150	360	P	
4	5182.000	49.93	-4.78	45.15	74.00	-28.85	peak	150	360	P	
5	6525.000	47.20	-1.06	46.14	74.00	-27.86	peak	150	360	P	
6	9602.000	47.26	4.38	51.64	74.00	-22.36	peak	150	360	P	
7	1731.000	48.80	-19.58	29.22	54.00	-24.78	AVG	150	360	P	
8	2122.000	52.40	-16.71	35.69	54.00	-18.31	AVG	150	360	P	
9	3261.000	43.34	-11.78	31.56	54.00	-22.44	AVG	150	360	P	
10	5199.000	39.56	-4.74	34.82	54.00	-19.18	AVG	150	360	P	
11 *	9619.000	33.84	4.41	38.25	54.00	-15.75	AVG	150	360	P	

802.11 g, ANT Polarization: Vertical

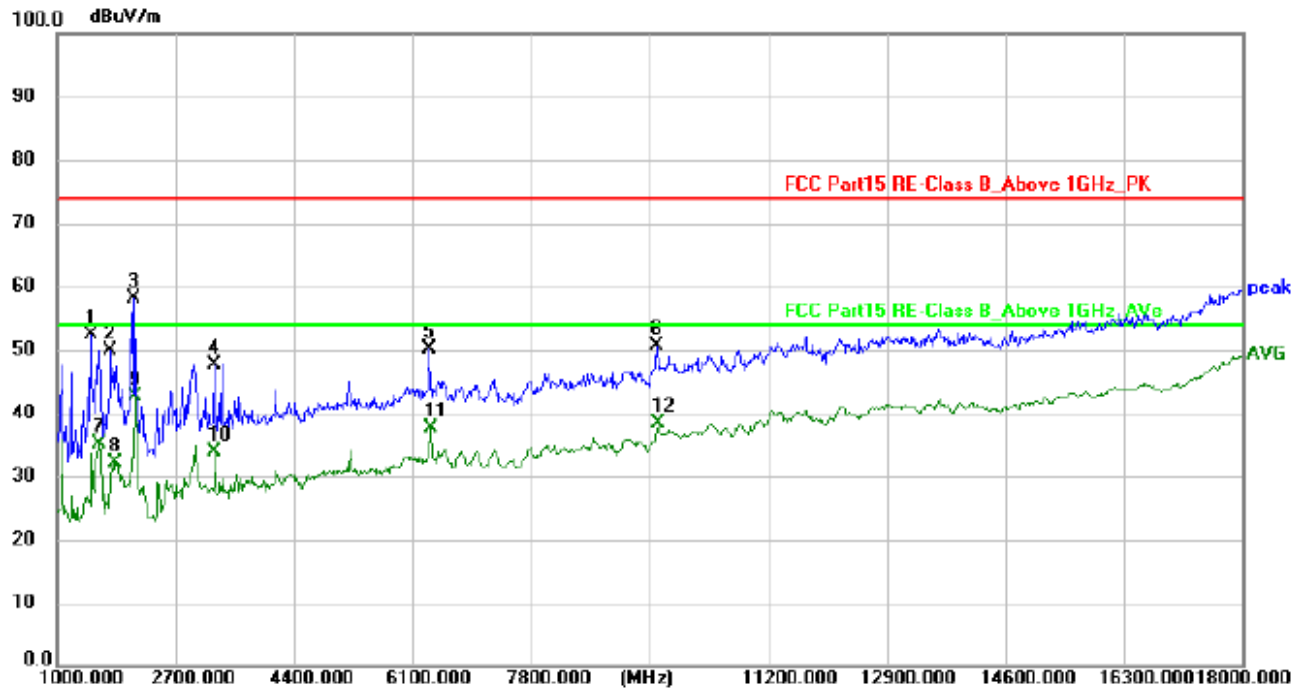


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1476.000	72.13	-19.81	52.32	74.00	-21.68	peak	150	360	P	
2	1765.000	69.46	-19.51	49.95	74.00	-24.05	peak	150	360	P	
3	2105.000	74.88	-16.79	58.09	74.00	-15.91	peak	150	360	P	
4	3244.000	59.33	-11.77	47.56	74.00	-26.44	peak	150	360	P	
5	6338.000	51.79	-1.55	50.24	74.00	-23.76	peak	150	360	P	
6	9602.000	46.32	4.38	50.70	74.00	-23.30	peak	150	360	P	
7	1595.000	54.83	-19.82	35.01	54.00	-18.99	AVG	150	360	P	
8	1833.000	51.17	-19.08	32.09	54.00	-21.91	AVG	150	360	P	
9 *	2122.000	59.43	-16.71	42.72	54.00	-11.28	AVG	150	360	P	
10	3261.000	45.63	-11.78	33.85	54.00	-20.15	AVG	150	360	P	
11	6355.000	39.06	-1.51	37.55	54.00	-16.45	AVG	150	360	P	
12	9619.000	33.88	4.41	38.29	54.00	-15.71	AVG	150	360	P	

802.11 n-HT20, ANT Polarization: Horizontal

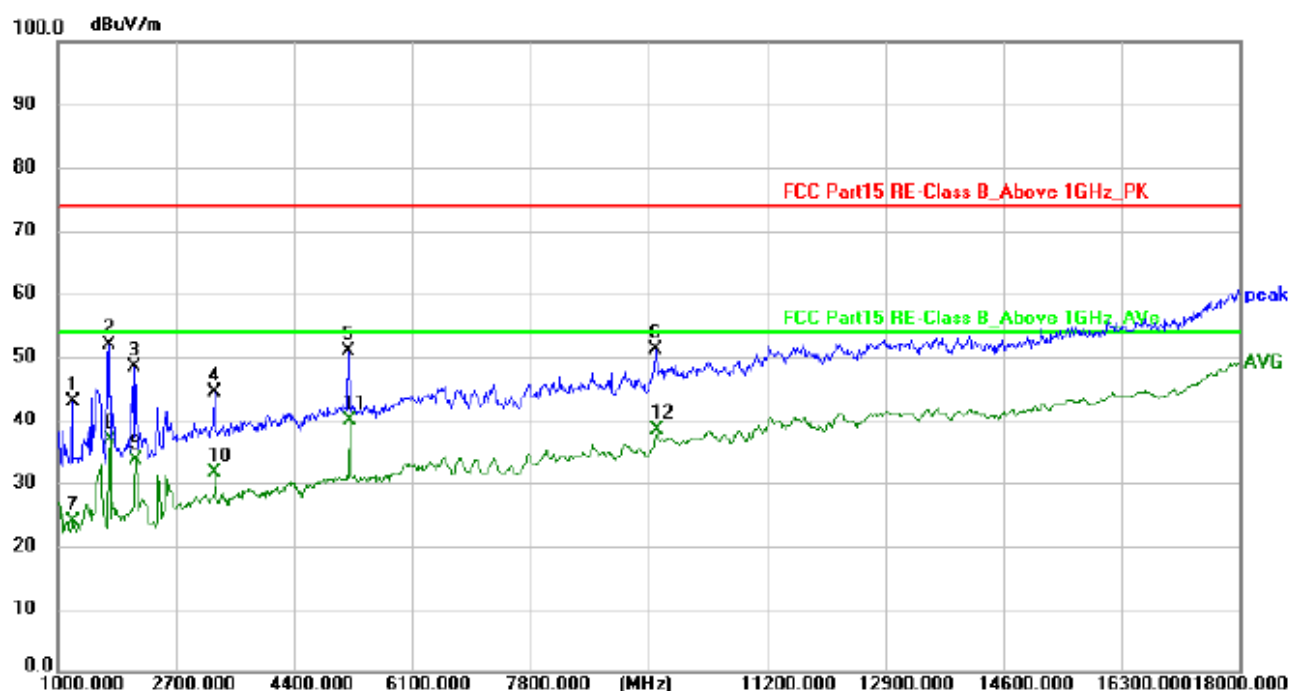


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1204.000	63.23	-20.31	42.92	74.00	-31.08	peak	150	0	P	
2	1731.000	71.56	-19.58	51.98	74.00	-22.02	peak	150	0	P	
3	2105.000	65.06	-16.79	48.27	74.00	-25.73	peak	150	0	P	
4	3244.000	56.14	-11.77	44.37	74.00	-29.63	peak	150	0	P	
5	5182.000	55.75	-4.78	50.97	74.00	-23.03	peak	150	0	P	
6	9602.000	46.66	4.38	51.04	74.00	-22.96	peak	150	0	P	
7	1221.000	44.20	-20.26	23.94	54.00	-30.06	AVG	150	0	P	
8	1748.000	56.45	-19.55	36.90	54.00	-17.10	AVG	150	0	P	
9	2122.000	50.33	-16.71	33.62	54.00	-20.38	AVG	150	0	P	
10	3261.000	43.31	-11.78	31.53	54.00	-22.47	AVG	150	0	P	
11 *	5199.000	44.50	-4.74	39.76	54.00	-14.24	AVG	150	0	P	
12	9619.000	33.87	4.41	38.28	54.00	-15.72	AVG	150	0	P	

802.11 n-HT20, ANT Polarization: Vertical

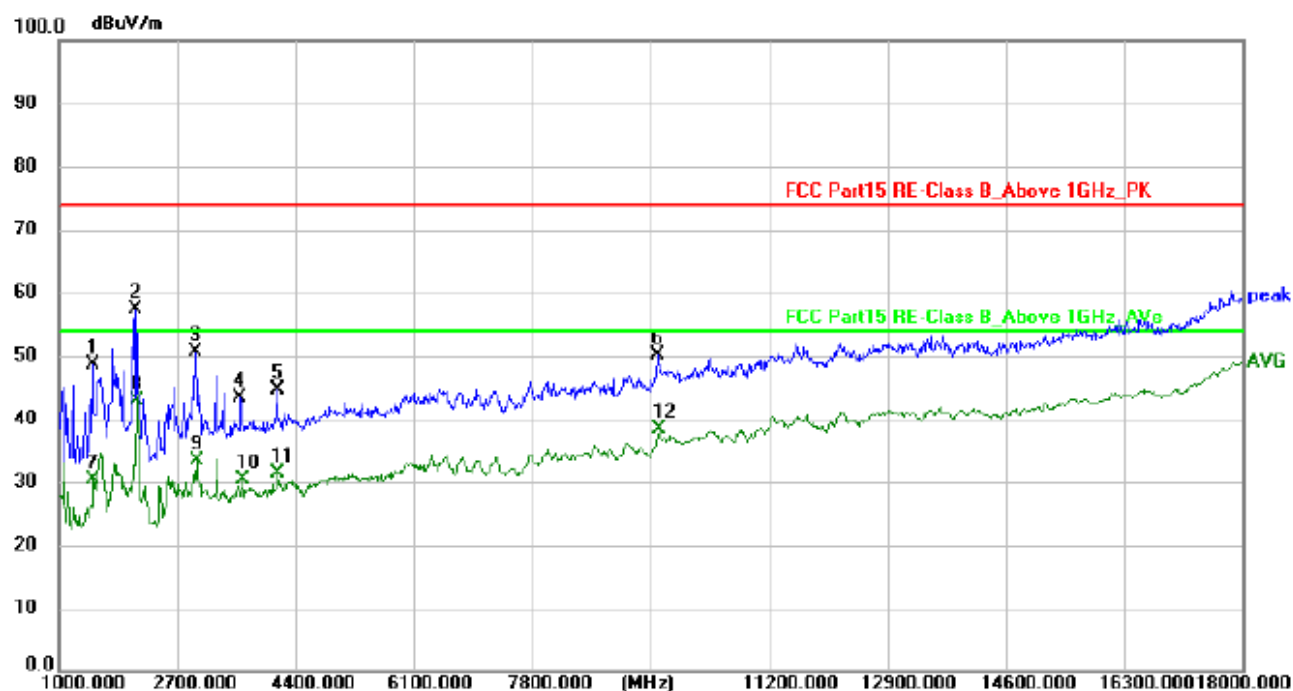


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1476.000	68.53	-19.81	48.72	74.00	-25.28	peak	150	348	P	
2	2105.000	74.21	-16.79	57.42	74.00	-16.58	peak	150	348	P	
3	2955.000	63.45	-12.80	50.65	74.00	-23.35	peak	150	348	P	
4	3601.000	54.41	-10.99	43.42	74.00	-30.58	peak	150	348	P	
5	4128.000	53.36	-8.77	44.59	74.00	-29.41	peak	150	348	P	
6	9602.000	45.63	4.38	50.01	74.00	-23.99	peak	150	348	P	
7	1493.000	50.10	-19.81	30.29	54.00	-23.71	AVG	150	348	P	
8 *	2122.000	59.61	-16.71	42.90	54.00	-11.10	AVG	150	348	P	
9	2972.000	46.13	-12.66	33.47	54.00	-20.53	AVG	150	348	P	
10	3635.000	41.05	-10.72	30.33	54.00	-23.67	AVG	150	348	P	
11	4145.000	40.15	-8.76	31.39	54.00	-22.61	AVG	150	348	P	
12	9619.000	33.85	4.41	38.26	54.00	-15.74	AVG	150	348	P	

802.11 n-HT40, ANT Polarization: Horizontal

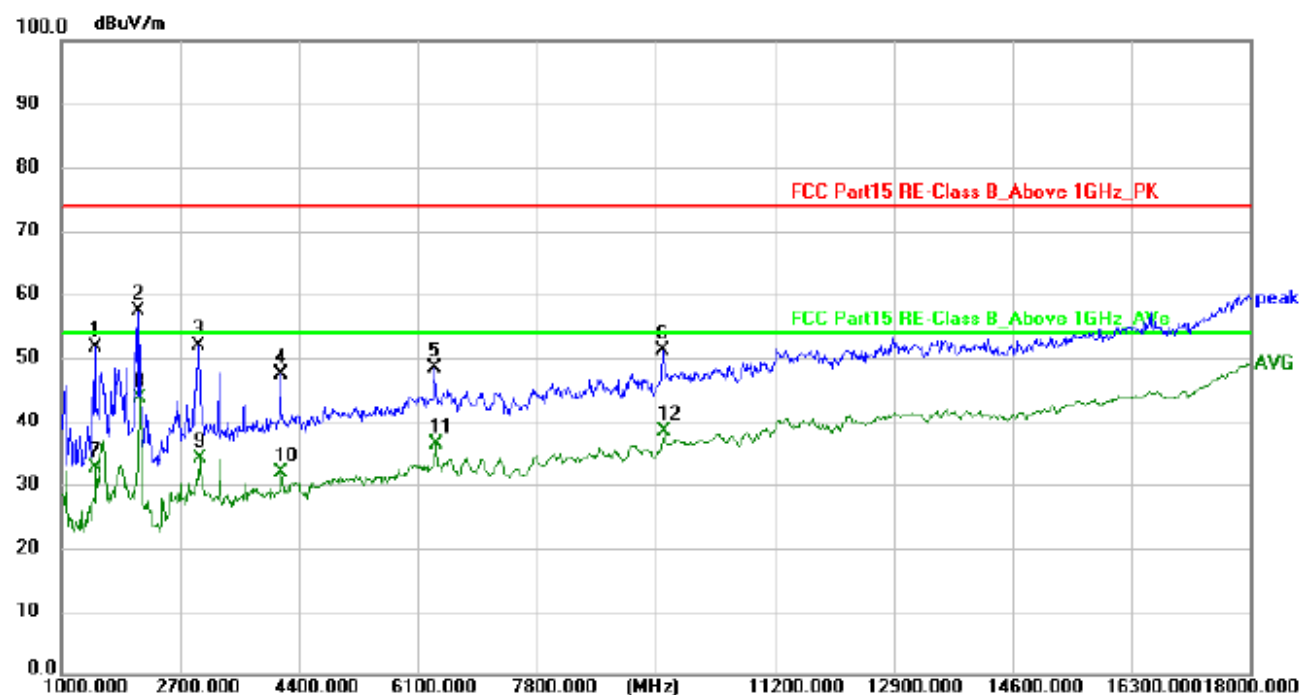

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1476.000	71.40	-19.81	51.59	74.00	-22.41	peak	150	0	P	
2	2105.000	74.16	-16.79	57.37	74.00	-16.63	peak	150	0	P	
3	2955.000	64.74	-12.80	51.94	74.00	-22.06	peak	150	0	P	
4	4128.000	56.03	-8.77	47.26	74.00	-26.74	peak	150	0	P	
5	6338.000	49.87	-1.55	48.32	74.00	-25.68	peak	150	0	P	
6	9602.000	46.72	4.38	51.10	74.00	-22.90	peak	150	0	P	
7	1493.000	52.54	-19.81	32.73	54.00	-21.27	AVG	150	0	P	
8 *	2122.000	60.26	-16.71	43.55	54.00	-10.45	AVG	150	0	P	
9	2972.000	46.69	-12.66	34.03	54.00	-19.97	AVG	150	0	P	
10	4145.000	40.59	-8.76	31.83	54.00	-22.17	AVG	150	0	P	
11	6355.000	37.86	-1.51	36.35	54.00	-17.65	AVG	150	0	P	
12	9619.000	33.90	4.41	38.31	54.00	-15.69	AVG	150	0	P	


802.11 n-HT40, ANT Polarization: Vertical

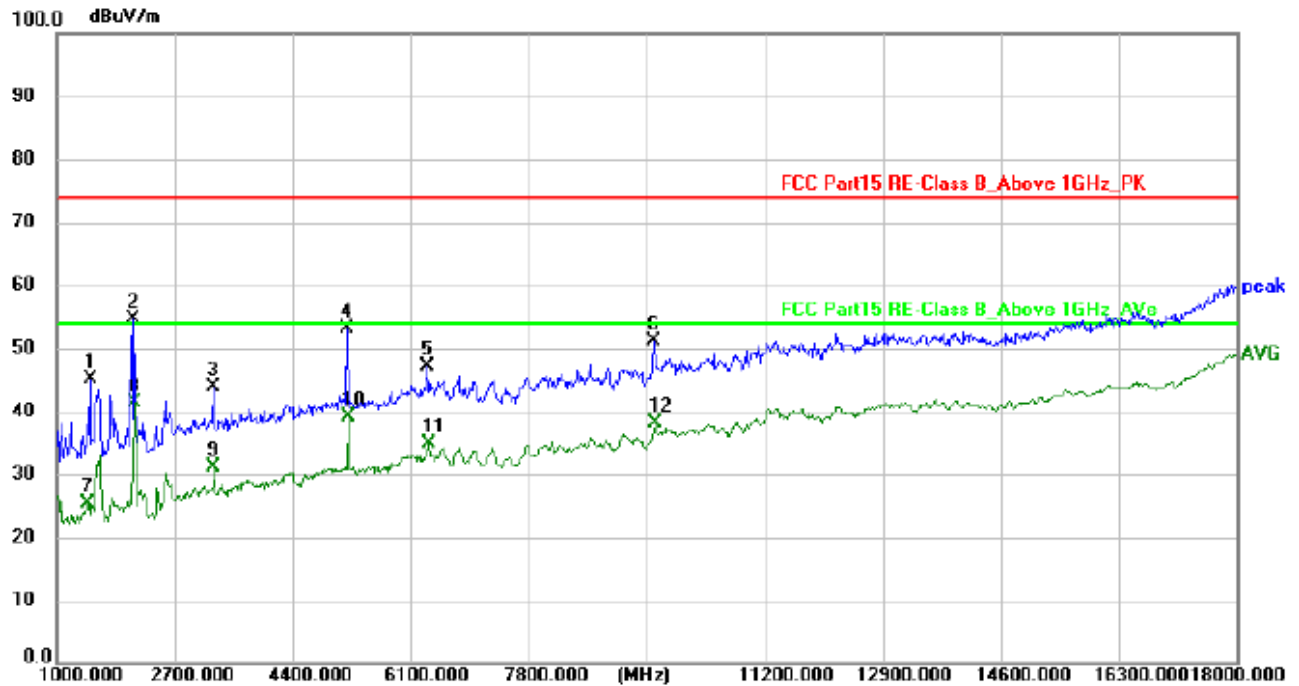

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1476.000	64.96	-19.81	45.15	74.00	-28.85	peak	150	0	P	
2	2105.000	71.34	-16.79	54.55	74.00	-19.45	peak	150	0	P	
3	3244.000	55.62	-11.77	43.85	74.00	-30.15	peak	150	0	P	
4	5182.000	57.88	-4.78	53.10	74.00	-20.90	peak	150	0	P	
5	6338.000	48.79	-1.55	47.24	74.00	-26.76	peak	150	0	P	
6	9602.000	46.65	4.38	51.03	74.00	-22.97	peak	150	0	P	
7	1442.000	45.08	-19.79	25.29	54.00	-28.71	AVG	150	0	P	
8 *	2122.000	57.97	-16.71	41.26	54.00	-12.74	AVG	150	0	P	
9	3261.000	42.98	-11.78	31.20	54.00	-22.80	AVG	150	0	P	
10	5199.000	43.90	-4.74	39.16	54.00	-14.84	AVG	150	0	P	
11	6355.000	36.30	-1.51	34.79	54.00	-19.21	AVG	150	0	P	
12	9619.000	33.65	4.41	38.06	54.00	-15.94	AVG	150	0	P	


Appendix B.7: Test Results of Radiated Emissions in Restricted Bands

802.11 b 2412MHz, ANT Polarization: Horizontal

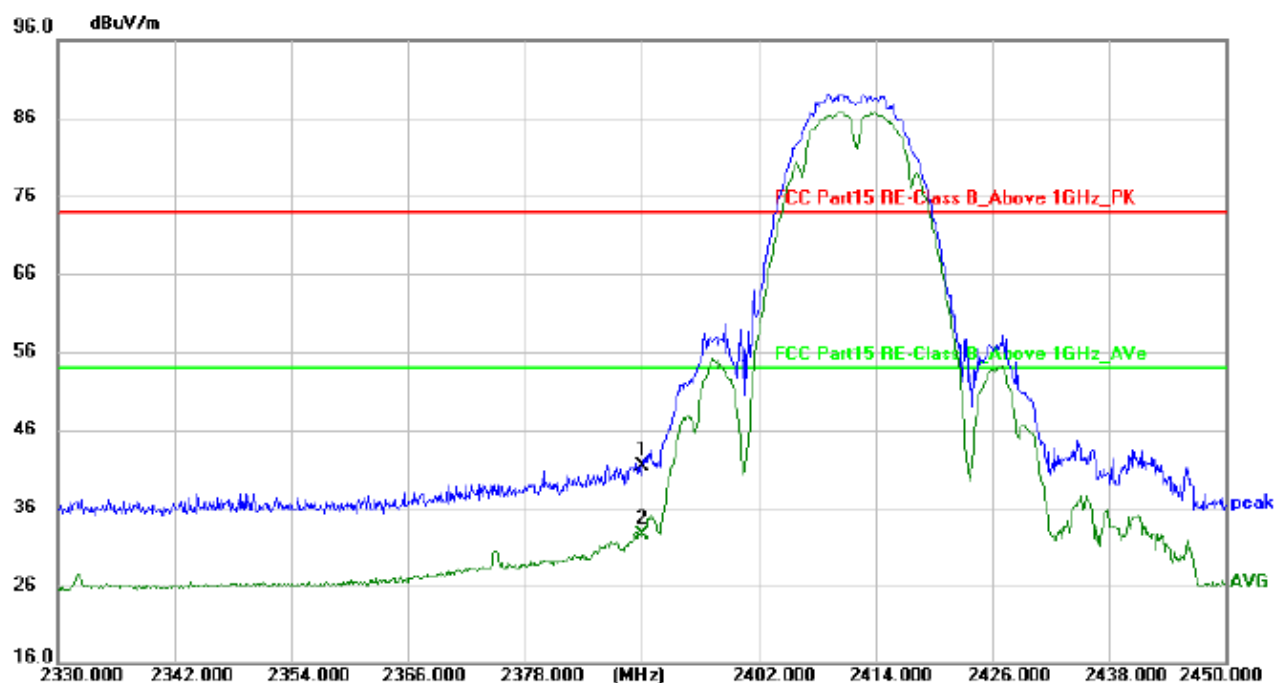


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2390.000	64.83	-23.61	41.22	74.00	-32.78	peak			P	
2 *	2390.000	56.20	-23.61	32.59	54.00	-21.41	AVG			P	

802.11 b 2412MHz, ANT Polarization: Vertical

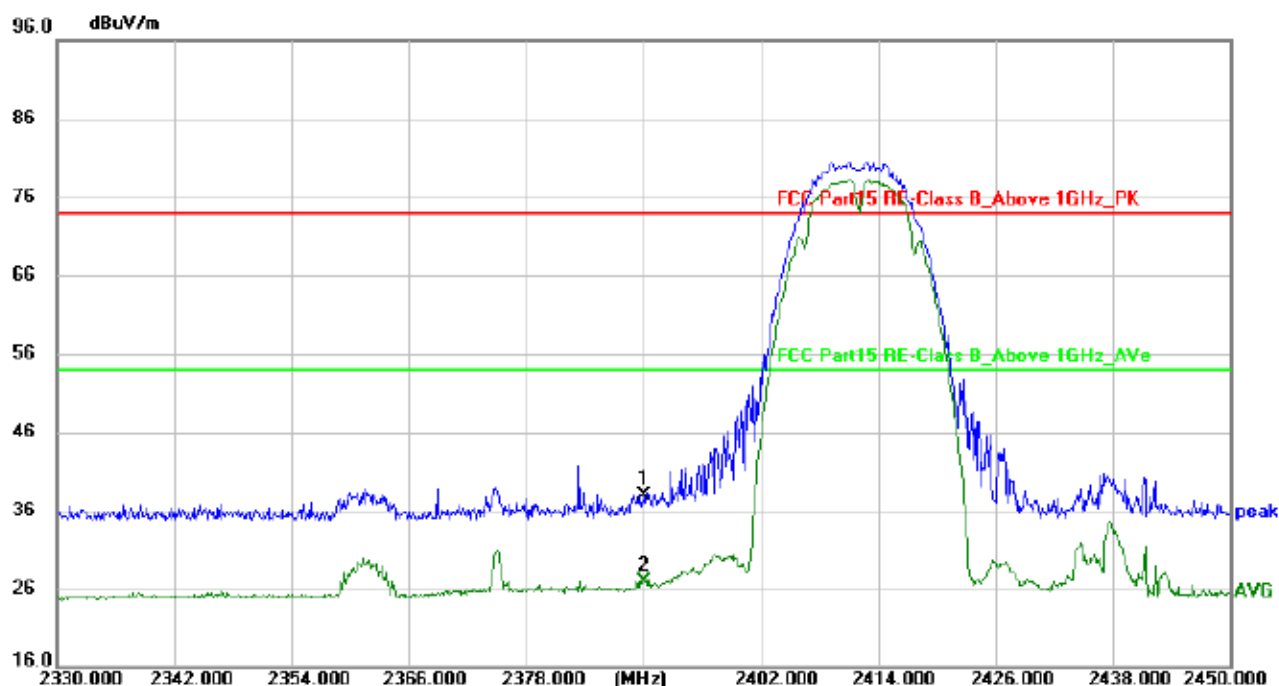


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2390.000	61.60	-23.61	37.99	74.00	-36.01	peak	150	360	P	
2 *	2390.000	50.48	-23.61	26.87	54.00	-27.13	AVG	150	360	P	

802.11 b 2462MHz, ANT Polarization: Horizontal

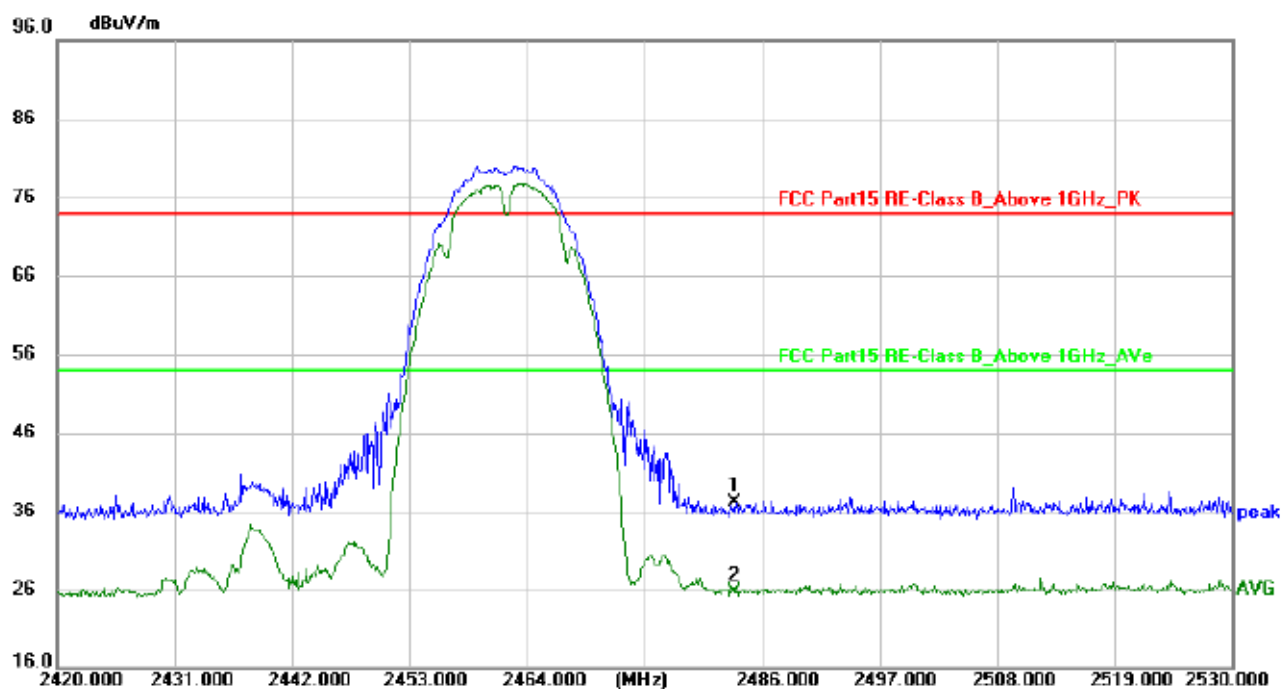


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2462.500	60.38	-23.23	37.15	74.00	-36.85	peak	150	0	P	
2 *	2462.500	48.98	-23.23	25.75	54.00	-28.25	AVG	150	0	P	

802.11 b 2462MHz, ANT Polarization: Vertical

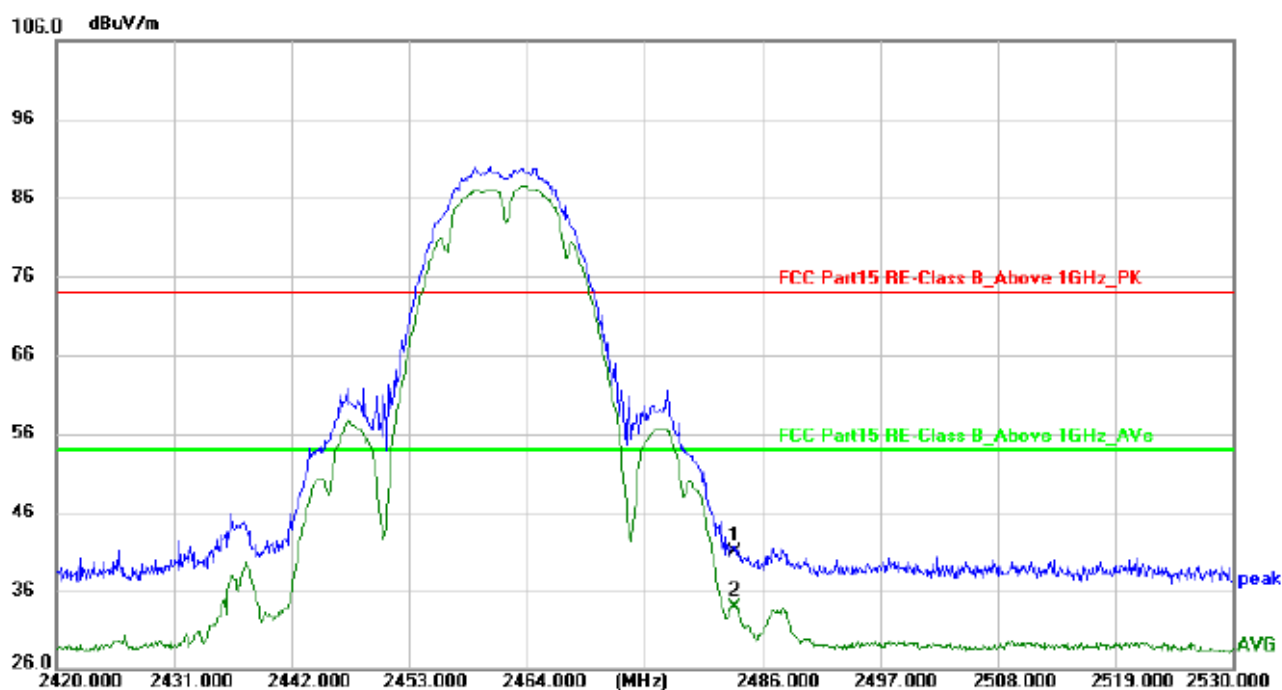


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	64.08	-23.23	40.85	74.00	-33.15	peak	150	0	P	
2 *	2483.500	57.13	-23.23	33.90	54.00	-20.10	AVG	150	0	P	

802.11 g 2412MHz, ANT Polarization: Horizontal

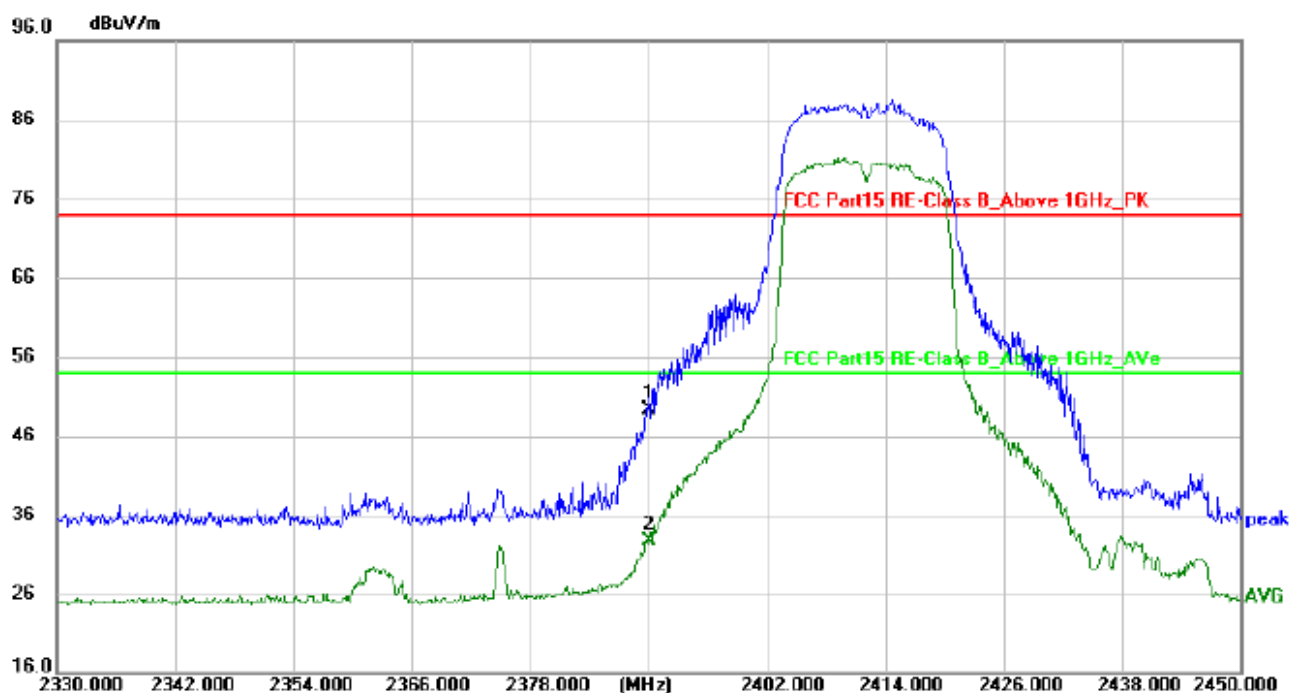


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2390.000	72.93	-23.61	49.32	74.00	-24.68	peak	150	360	P	
2 *	2390.000	56.26	-23.61	32.65	54.00	-21.35	AVG	150	360	P	

802.11 g 2412MHz, ANT Polarization: Vertical

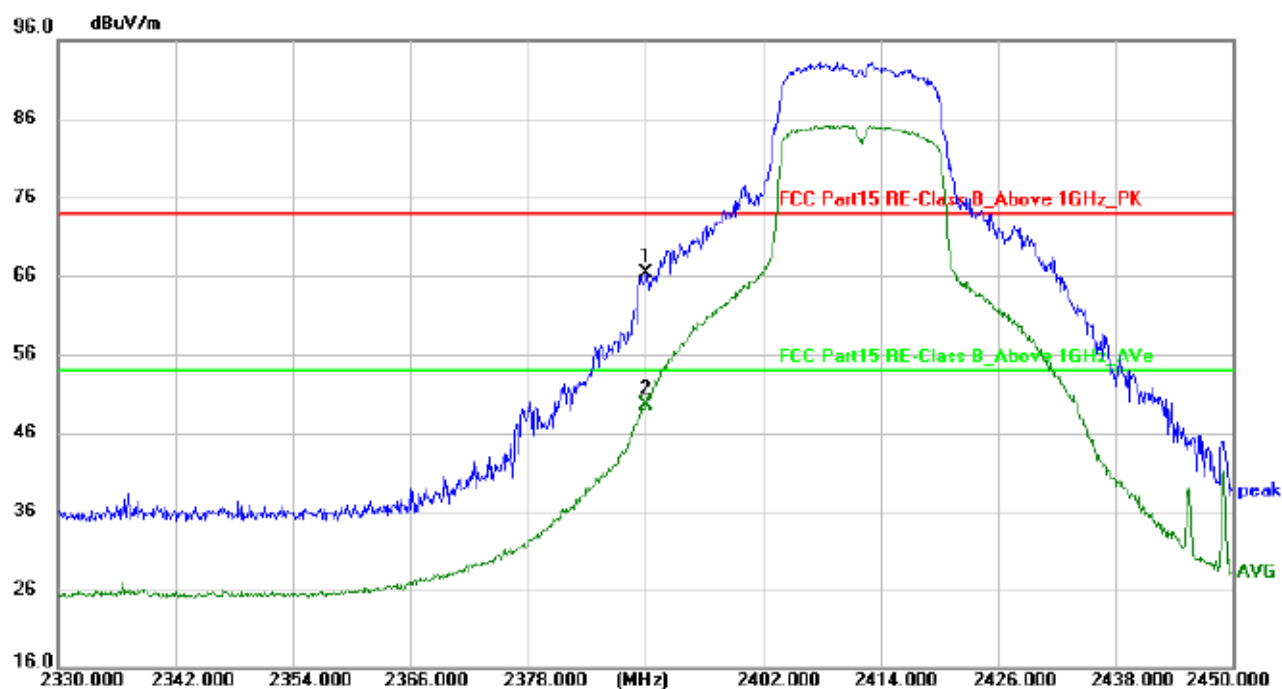


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2390.000	89.87	-23.61	66.26	74.00	-7.74	peak	150	360	P	
2 *	2390.000	73.08	-23.61	49.47	54.00	-4.53	AVG	150	360	P	

802.11 n-HT20 2412MHz, ANT Polarization: Horizontal

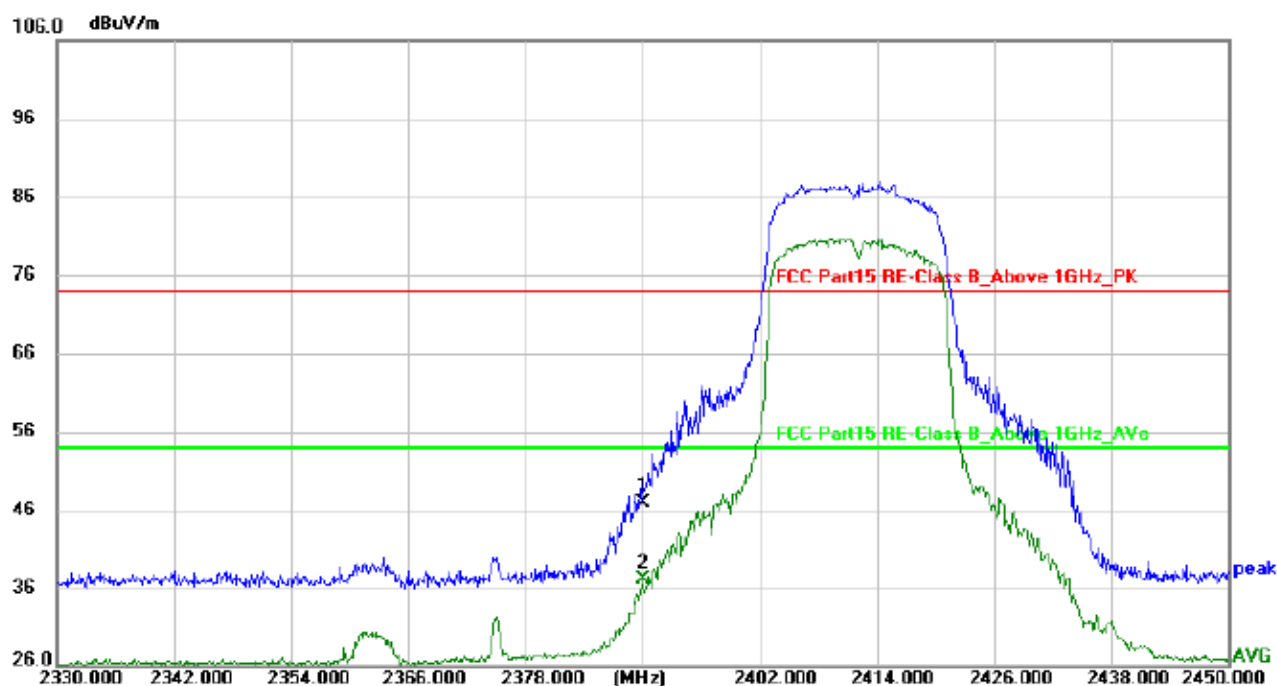


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2390.000	70.61	-23.61	47.00	74.00	-27.00	peak			P	
2 *	2390.000	60.64	-23.61	37.03	54.00	-16.97	AVG			P	

802.11 n-HT20 2412MHz, ANT Polarization: Vertical

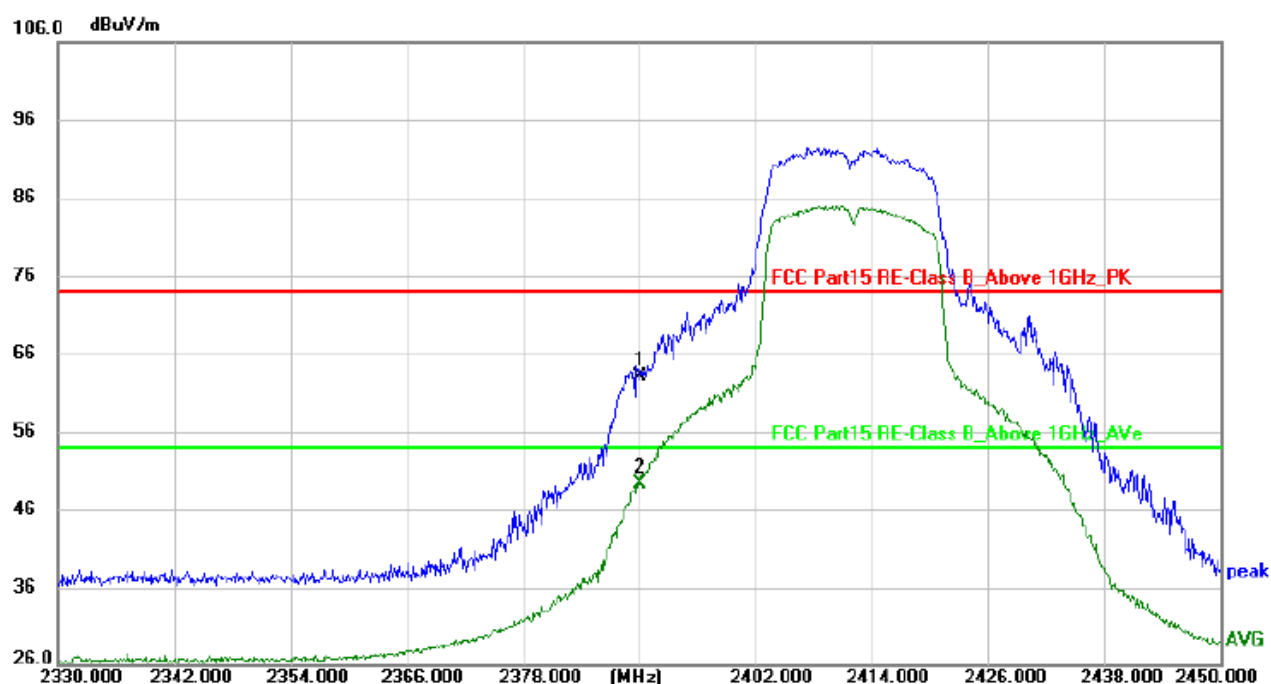


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2390.000	86.65	-23.61	63.04	74.00	-10.96	peak	150	360	P	
2 *	2390.000	72.97	-23.61	49.36	54.00	-4.64	AVG	150	360	P	

802.11 n-HT20 2462MHz, ANT Polarization: Horizontal

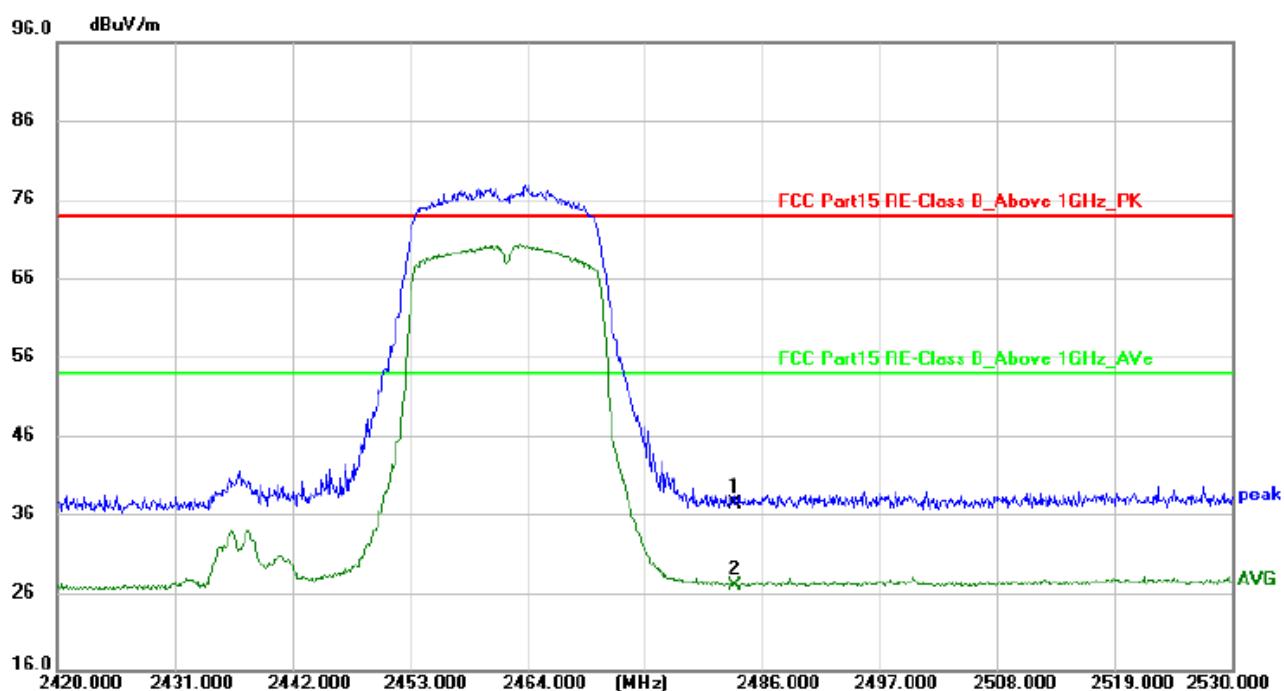


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	60.43	-23.23	37.20	74.00	-36.80	peak	150	0	P	
2 *	2483.500	50.19	-23.23	26.96	54.00	-27.04	AVG	150	0	P	

802.11 n-HT20 2462MHz, ANT Polarization: Vertical

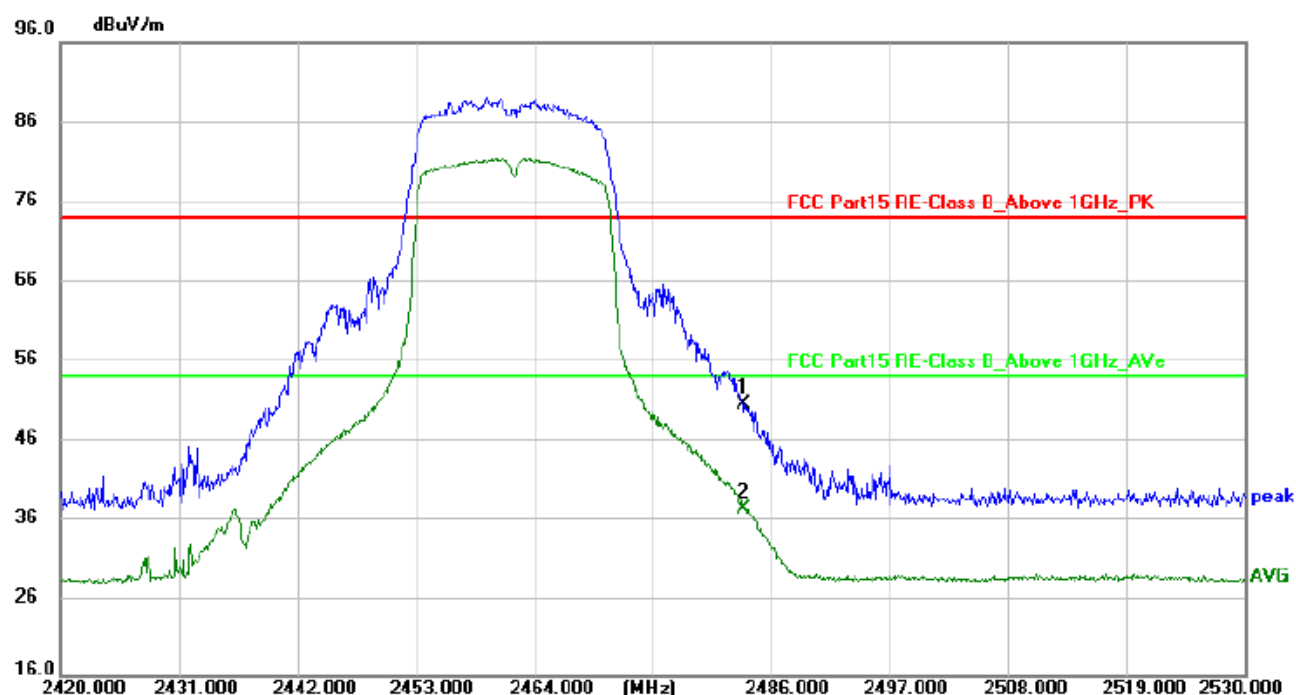


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	73.55	-23.23	50.32	74.00	-23.68	peak	150	0	P	
2 *	2483.500	60.34	-23.23	37.11	54.00	-16.89	AVG	150	0	P	

802.11 n-HT40 2422MHz, ANT Polarization: Horizontal

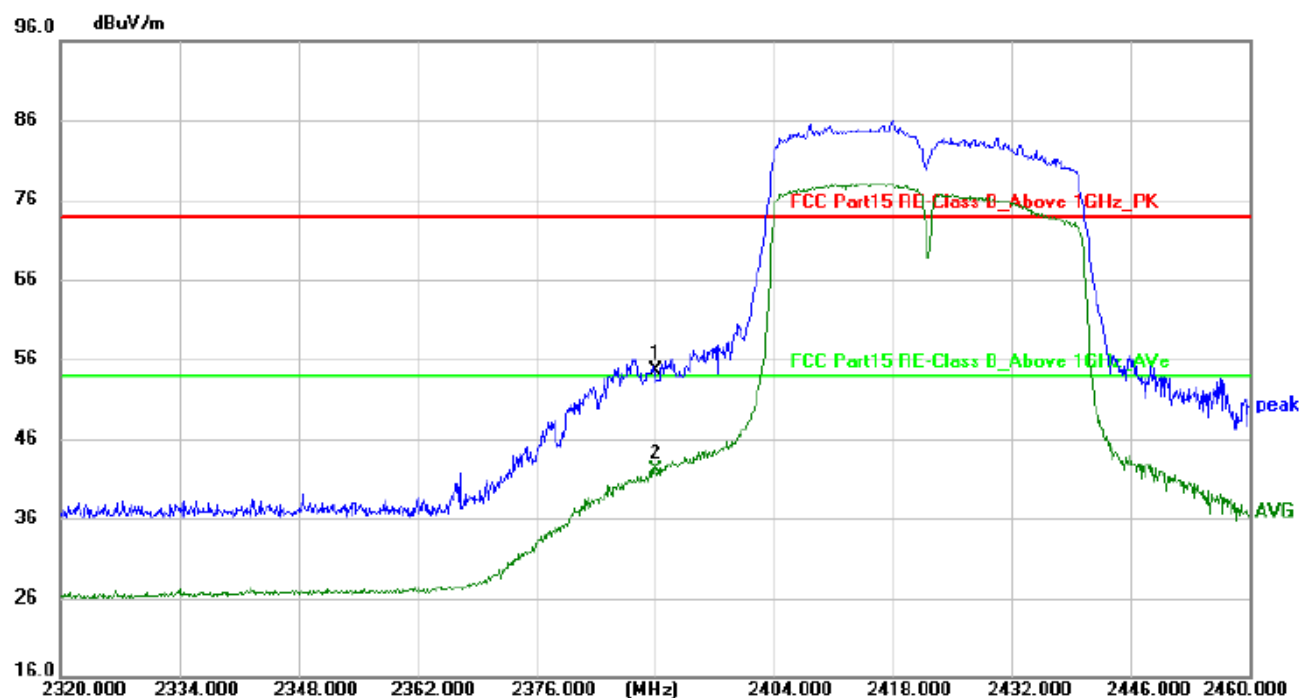


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2390.000	78.13	-23.61	54.52	74.00	-19.48	peak			P	
2 *	2390.000	65.69	-23.61	42.08	54.00	-11.92	AVG			P	

802.11 n-HT40 2422MHz, ANT Polarization: Vertical

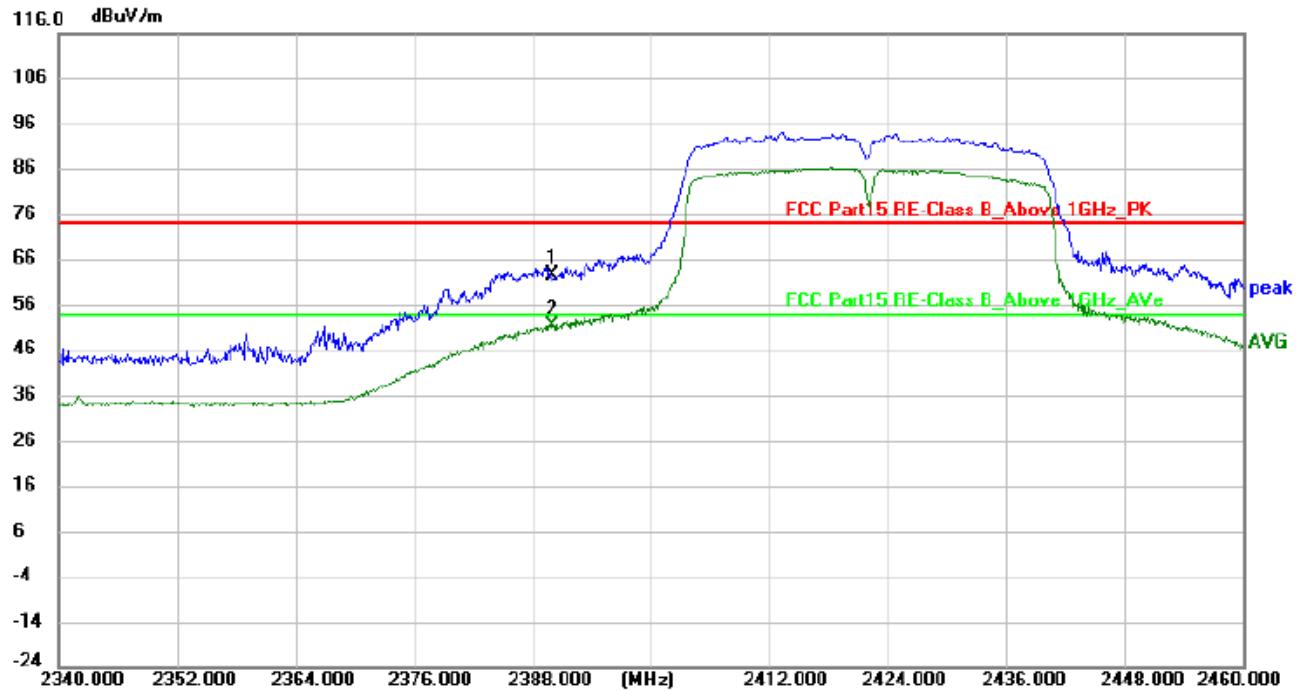


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2390.000	78.45	-15.88	62.57	74.00	-11.43	peak	150	0	P	
2 *	2390.000	67.16	-15.88	51.28	54.00	-2.72	AVG	150	0	P	

802.11 n-HT40 2452MHz, ANT Polarization: Horizontal

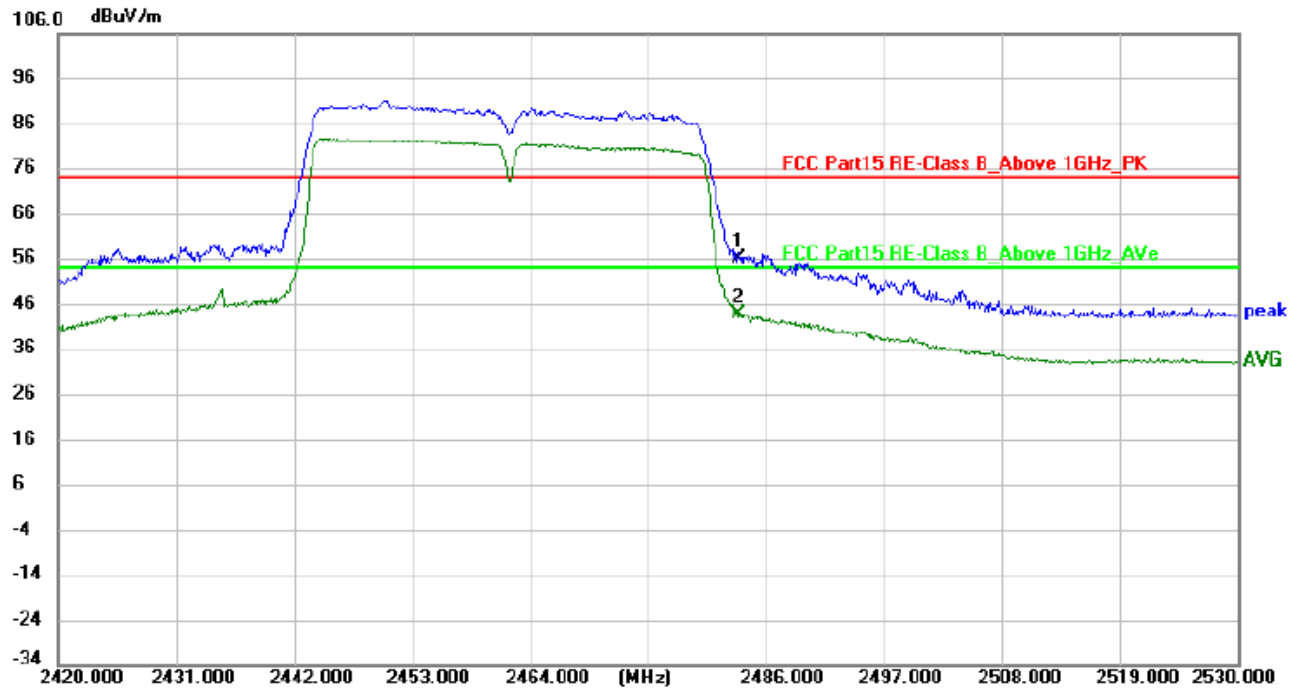


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	71.42	-15.30	56.12	74.00	-17.88	peak	150	0	P	
2 *	2483.500	59.08	-15.30	43.78	54.00	-10.22	AVG	150	0	P	

802.11 n-HT40 2452MHz, ANT Polarization: Vertical

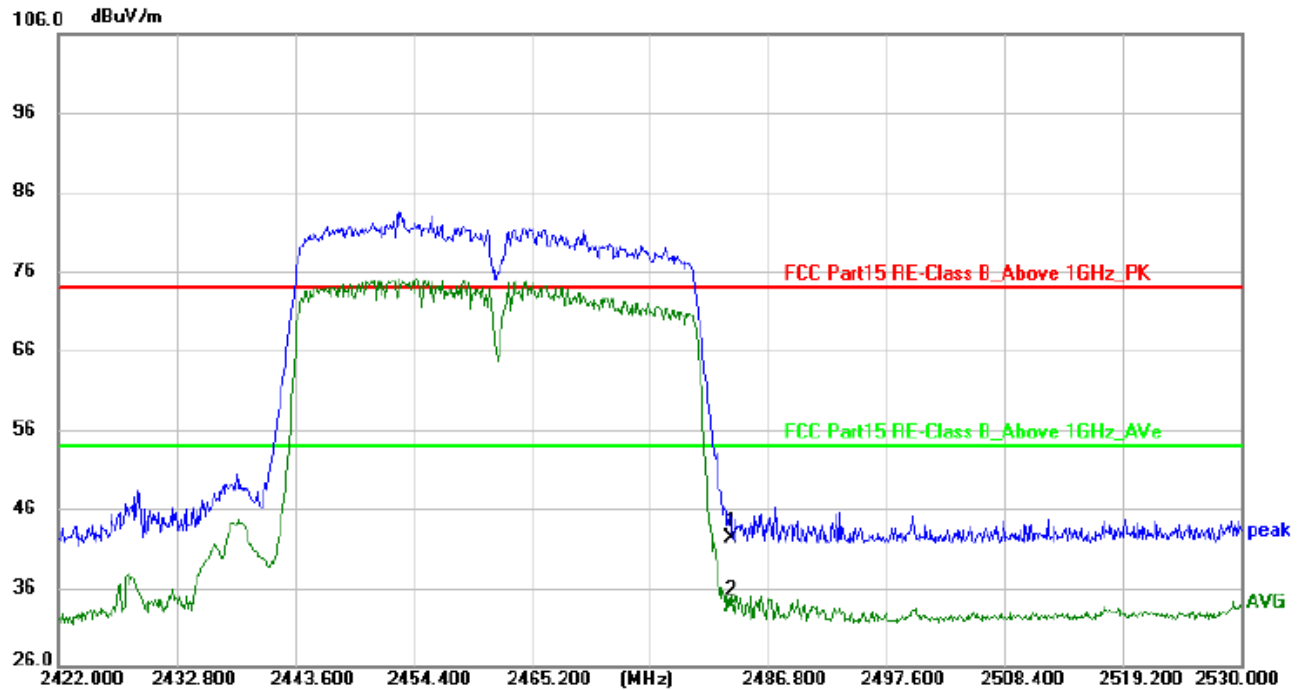


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	57.61	-15.30	42.31	74.00	-31.69	peak	150	360	P	
2 *	2483.500	48.96	-15.30	33.66	54.00	-20.34	AVG	150	360	P	

Appendix B.8: Test Plots of Conducted Emission on AC Mains

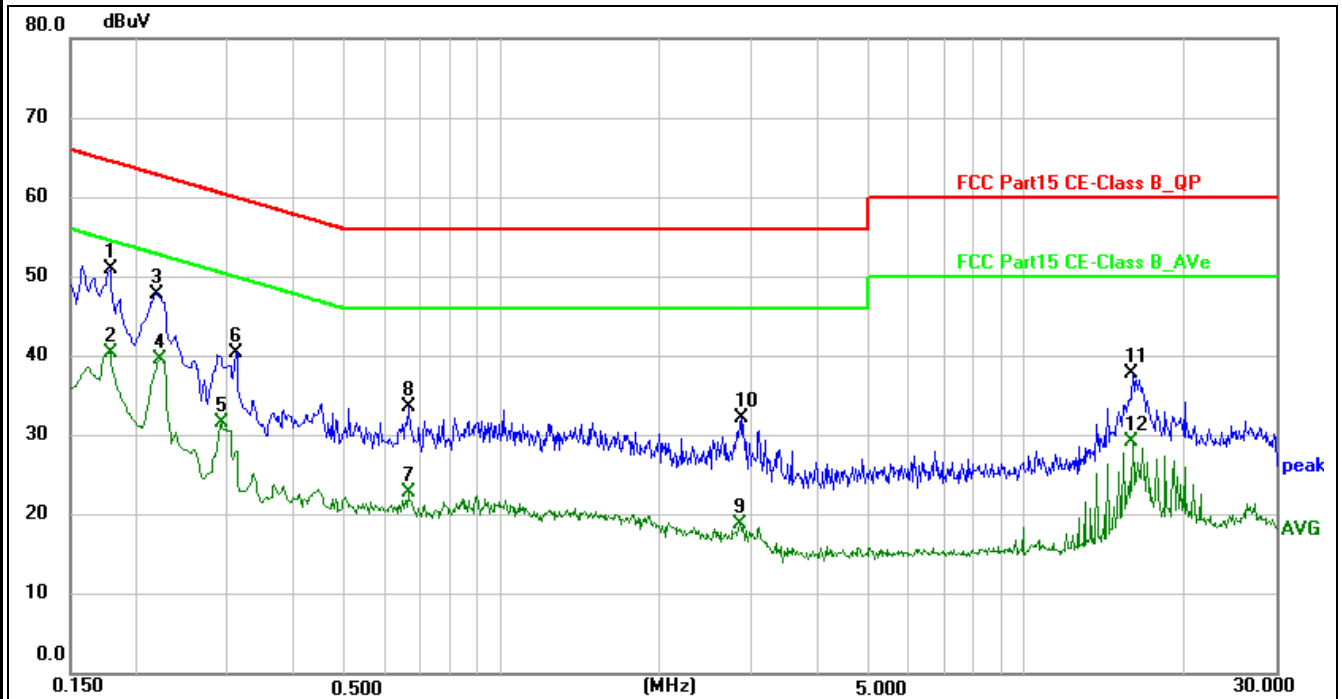

Site:		Phase:N	Temperature(C):22(C)
Limit:	FCC Part15 CE-Class B_QP		Humidity(%):51%
EUT:	Portable Recording and Broadcasting Host	Test Time:	2024/8/2 10:06:07
M/N.:	WX-AX60	Power Rating:	AC120V/60Hz
Mode:	On, Wireless link	Test Engineer:	Neou

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1780	31.65	19.33	50.98	64.58	-13.60	peak
2	0.1780	21.13	19.33	40.46	54.58	-14.12	AVG
3	0.2180	28.55	19.33	47.88	62.89	-15.01	peak
4 *	0.2220	20.32	19.33	39.65	52.74	-13.09	AVG
5	0.2900	12.27	19.37	31.64	50.52	-18.88	AVG
6	0.3100	20.96	19.37	40.33	59.97	-19.64	peak
7	0.6620	3.36	19.39	22.75	46.00	-23.25	AVG
8	0.6660	14.30	19.39	33.69	56.00	-22.31	peak
9	2.8460	-0.68	19.45	18.77	46.00	-27.23	AVG
10	2.8580	12.80	19.45	32.25	56.00	-23.75	peak
11	16.0459	18.16	19.57	37.73	60.00	-22.27	peak
12	16.0459	9.67	19.57	29.24	50.00	-20.76	AVG

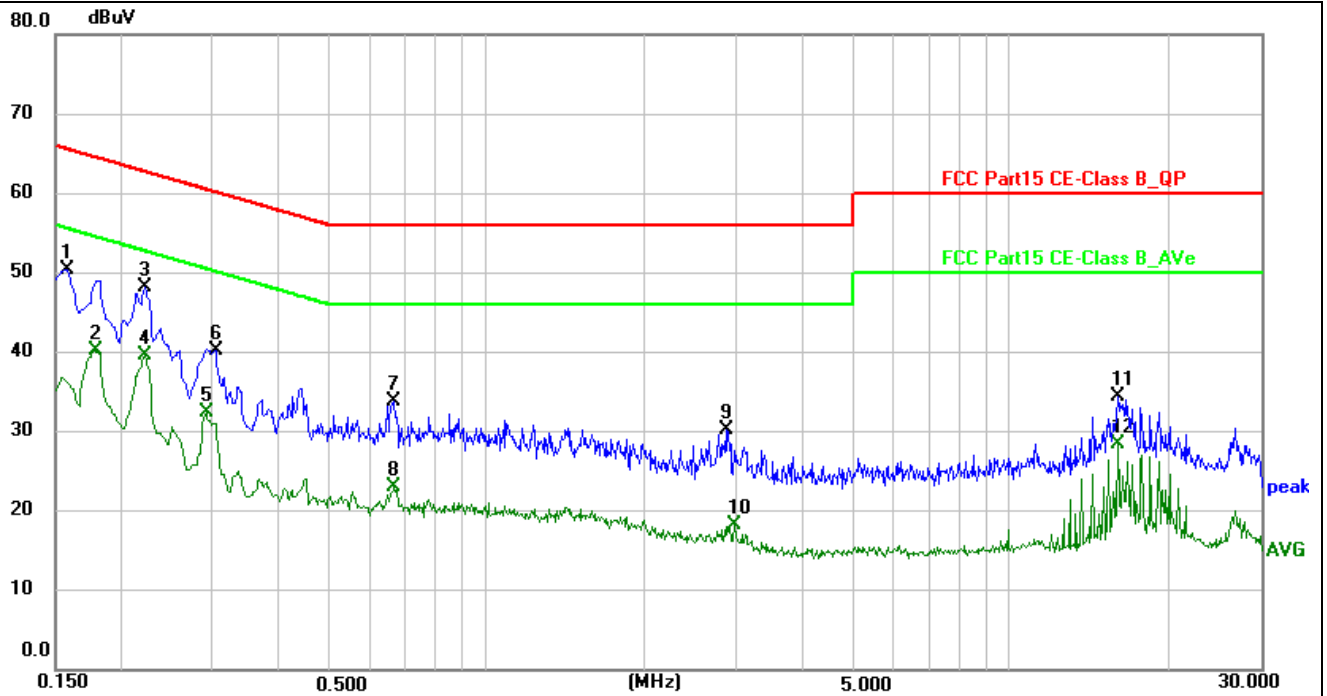

Site:	FCC Part15 CE-Class B_QP	Phase:N	Temperature(C):22(C)
Limit:	Portable Recording and	Test Time:	Humidity(%):51%
EUT:	Broadcasting Host		2024/8/2 10:06:07
M/N.:	WX-AX60	Power Rating:	AC120V/60Hz
Mode:	On, Wireless link	Test Engineer:	Neou

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	31.09	19.32	50.41	65.57	-15.16	peak
2	0.1780	20.86	19.32	40.18	54.58	-14.40	AVG
3	0.2220	28.84	19.32	48.16	62.74	-14.58	peak
4 *	0.2220	20.24	19.32	39.56	52.74	-13.18	AVG
5	0.2900	13.07	19.33	32.40	50.52	-18.12	AVG
6	0.3020	20.83	19.33	40.16	60.19	-20.03	peak
7	0.6660	14.50	19.39	33.89	56.00	-22.11	peak
8	0.6660	3.71	19.39	23.10	46.00	-22.90	AVG
9	2.8620	10.72	19.43	30.15	56.00	-25.85	peak
10	2.9700	-1.16	19.43	18.27	46.00	-27.73	AVG
11	16.0500	14.87	19.59	34.46	60.00	-25.54	peak
12	16.0500	8.81	19.59	28.40	50.00	-21.60	AVG