

Shenzhen Xinxiang Culture Technology Co., Ltd.
RoomD1001, Building A3, No. 2533 Guanguang Road, Fenghuang Community,
Fenghuang Street, Guangming District, Shenzhen, China


Antenna specification

APPlications

※Bluetooth Home RF

※ISM band 2.4GHz applications


1.Dimensions

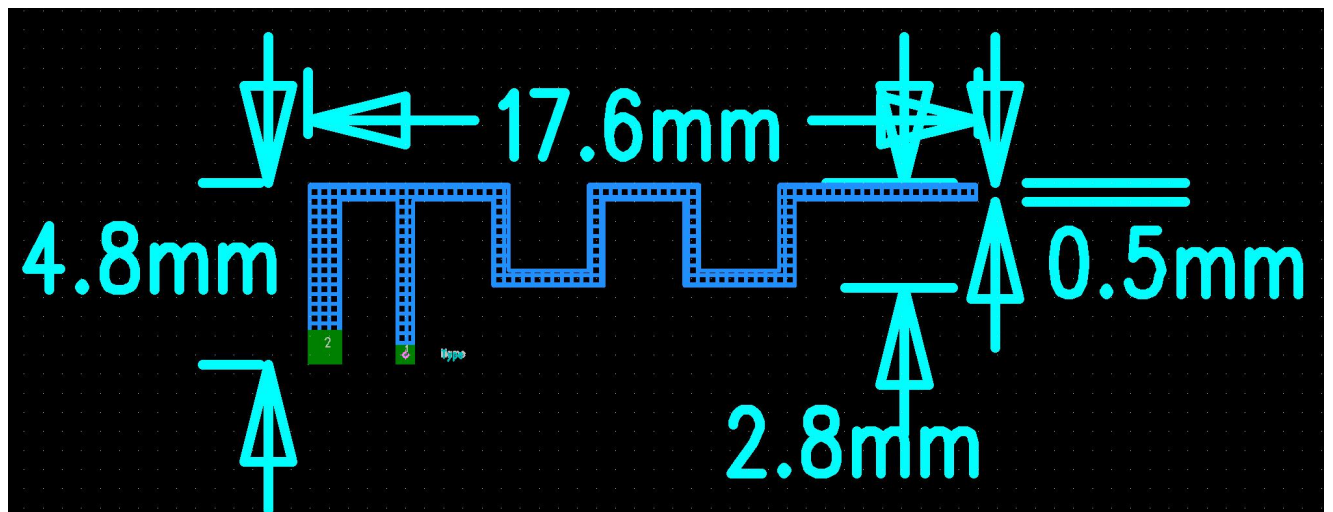


2.Specifications

number	Item	Specifications
1	Working Central Frequency	2441 MHz
2	Band Width	(2402-2480)MHz
3	Gain	2.64dBi (Max)
4	VSWR	≤ 2.0
5	Antenna type	PCB antenna
6	Azimuth Beam width	Omni - directional
7	Impedance	50 欧姆
8	Model	2.4G PCB ANT

Fred(MHz)	Effi(dB)	Cain(dBi)
2400	-5.79	1.6
2410	-5.49	1.65
2420	-4.67	2.45
2430	-4.35	2.46
2440	-4.09	2.64
2450	-4.36	2.52
2460	-4.71	2.32
2470	-4.96	2.18
2480	-5.41	1.58
2490	-5.47	1.26
2500	-5.87	0.56

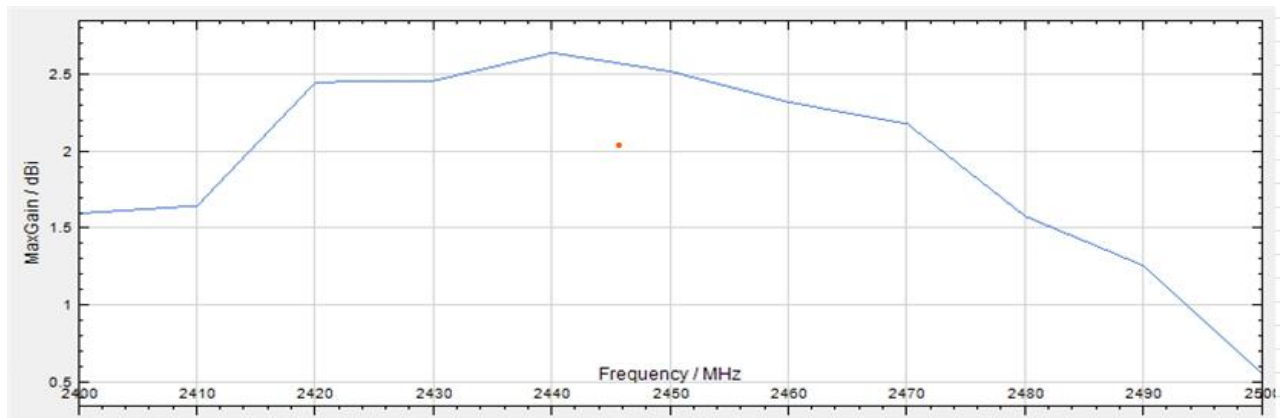


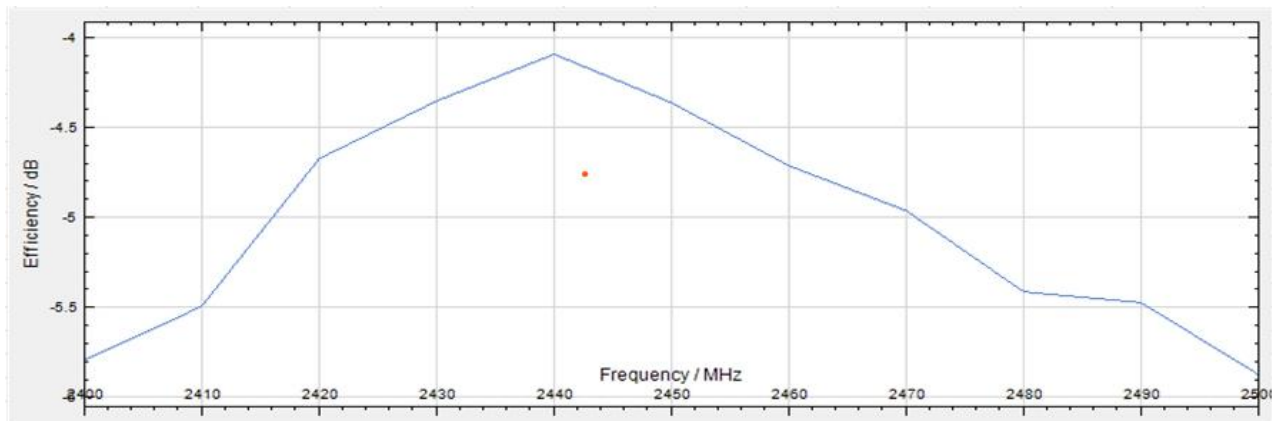

3. Instrument testing, software simulation parameters


① VSWR

Mkr1: 2397MHz 1.47 Mkr2: 2450MHz 1.51 Mkr3: 2482 MHz 1.59

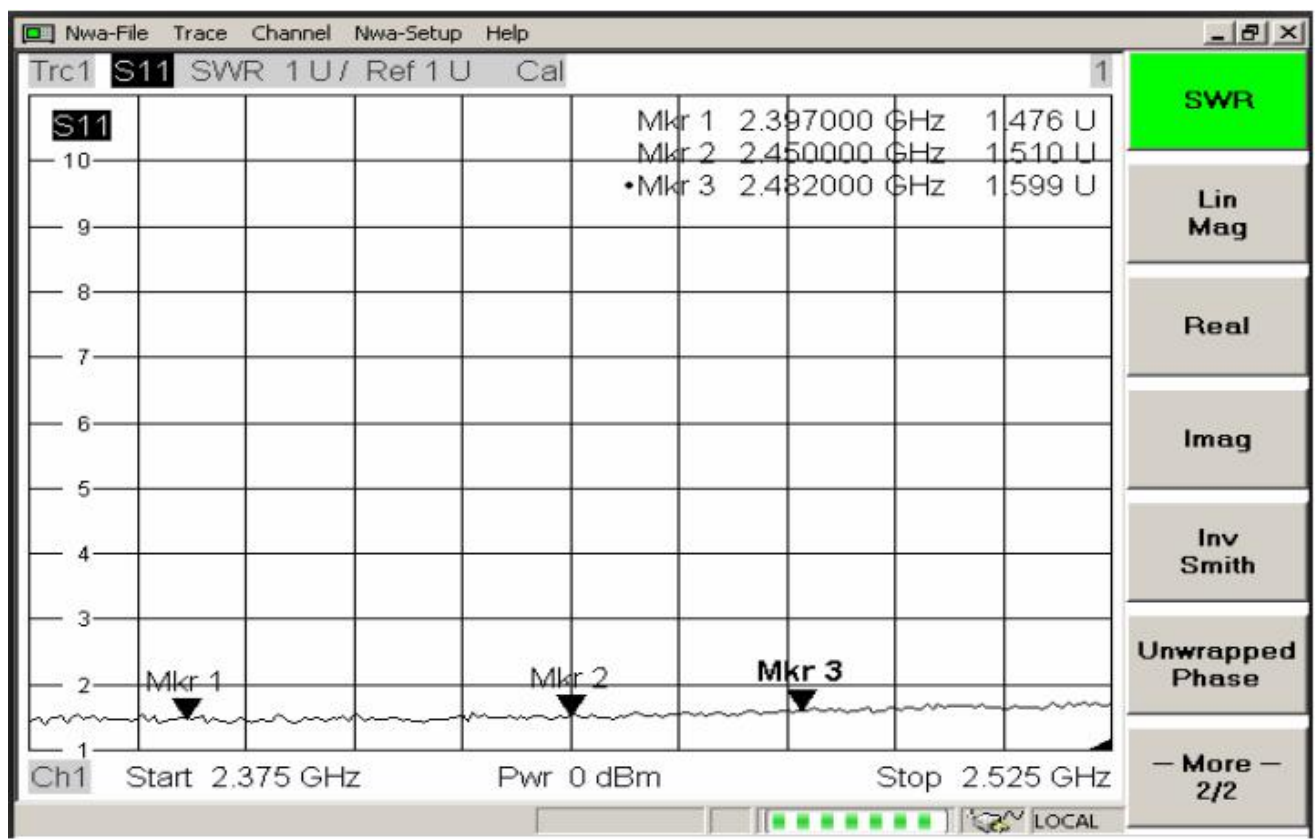


②Smith Char

Mkr1: 2397MHz 73.4 Mkr2: 2450MHz 62.7 Mkr3: 2482MHz 66.8

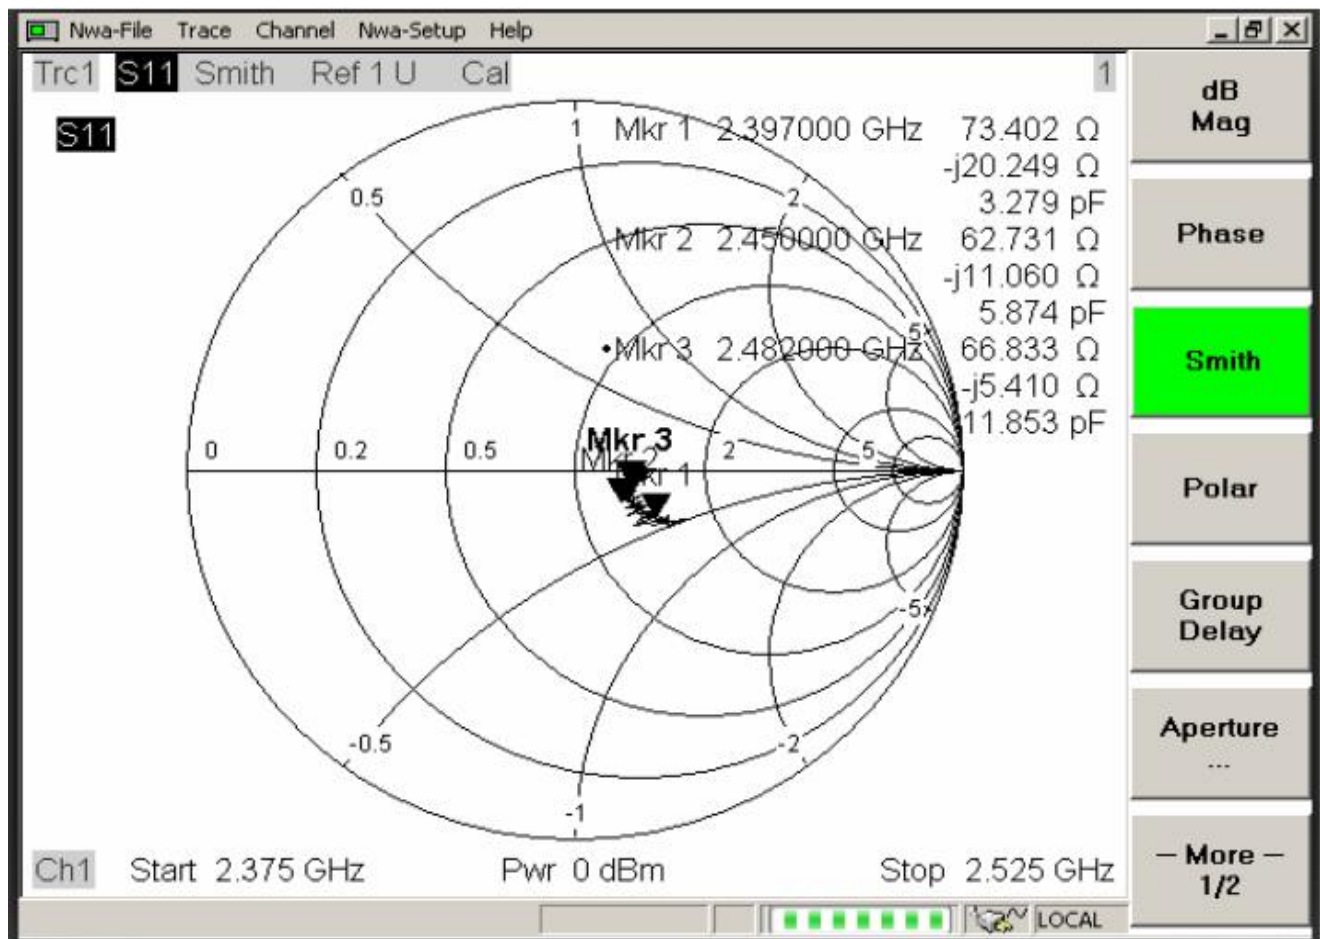


③Return Loss

Mkr1: 2397MHz -15 Mkr2: 2450MHz -18 Mkr3: 2482 MHz -16

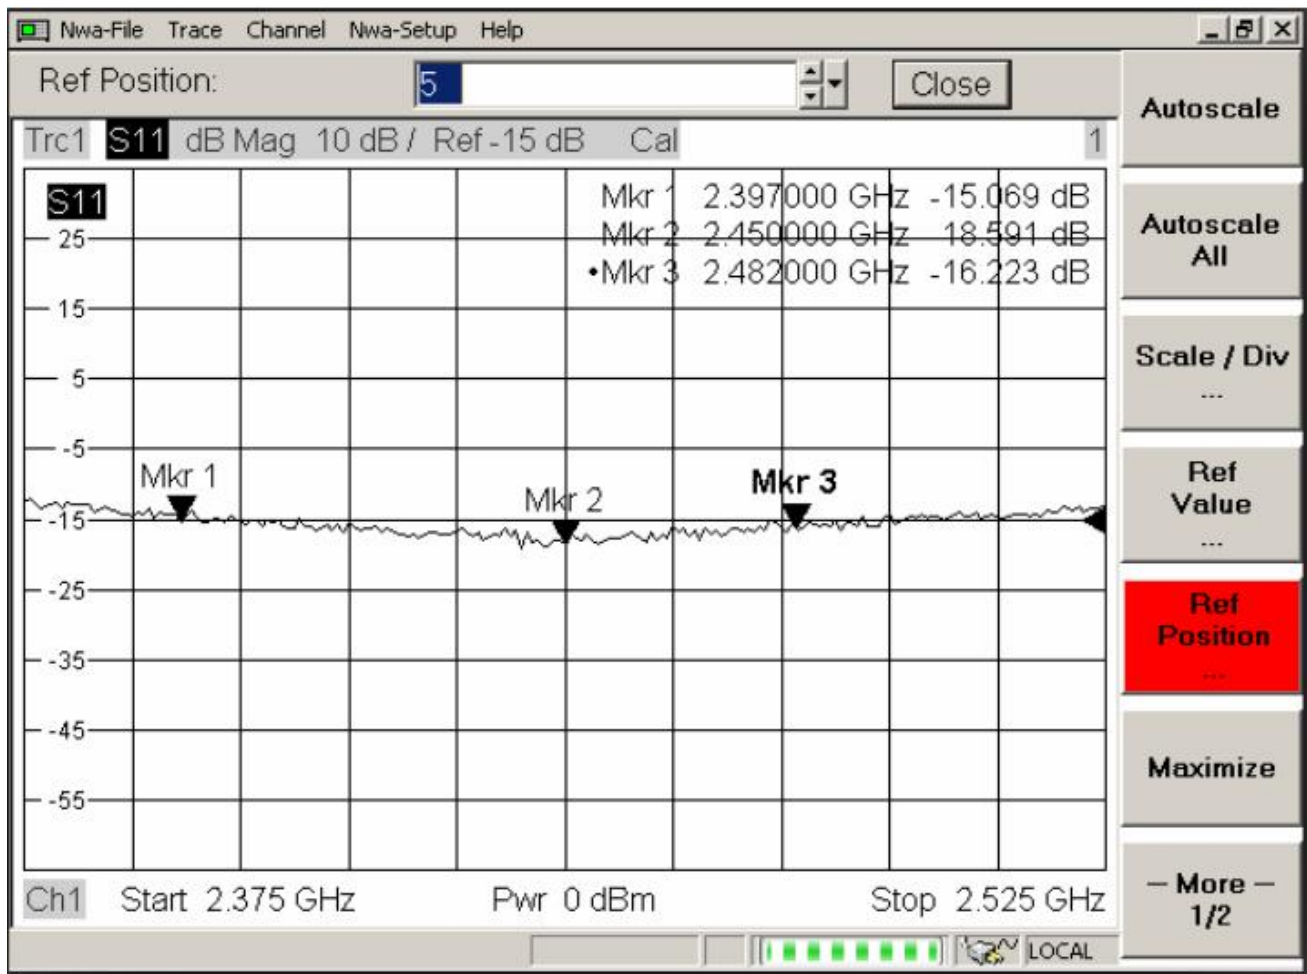


④Smith Char The simulation

Mkr1: 2400MHz 1.234 Mkr2: 2500MHz 1.051 Mkr3: 2600MHz 1.322

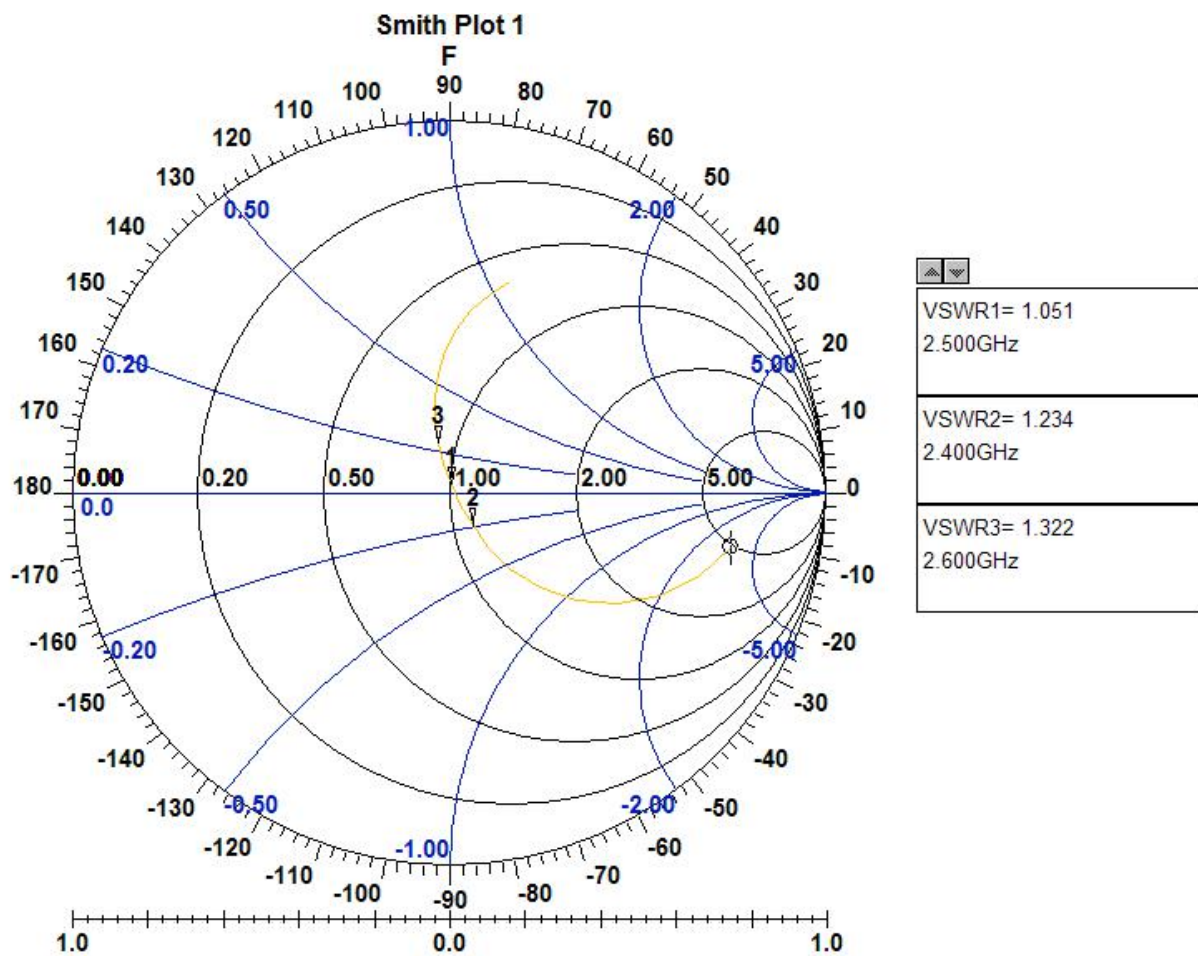


⑤Return Loss The simulation

Mkr1: 2400MHz -19.59 Mkr2: 2450MHz -27.70 Mkr3: 2500MHz -31.97
Mkr4: 2550MHz -21.83

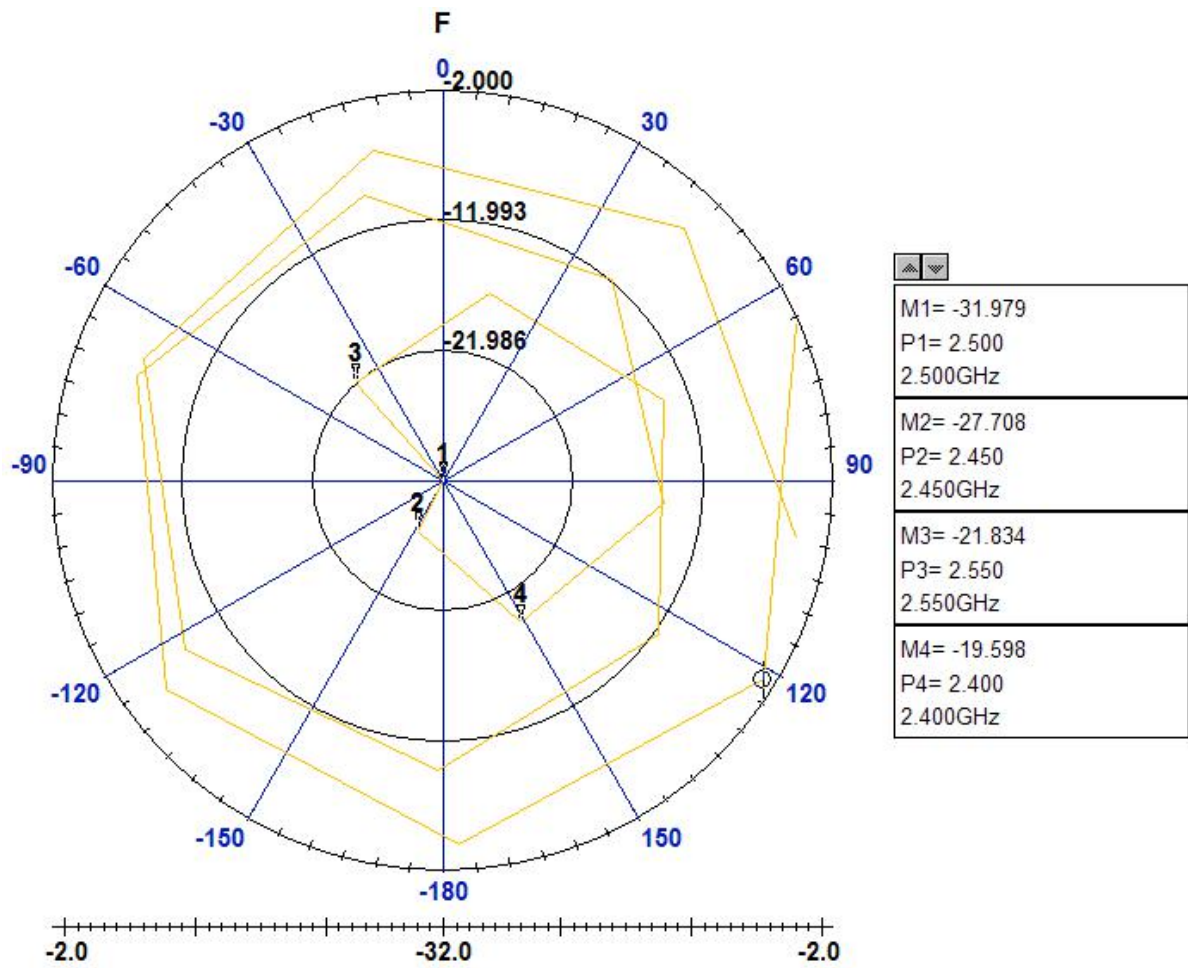


⑥Phase The simulation


Mkr1: 2400MHz -54.89 Mkr2: 2500MHz -82.03 Mkr3: 2600MHz -102.6

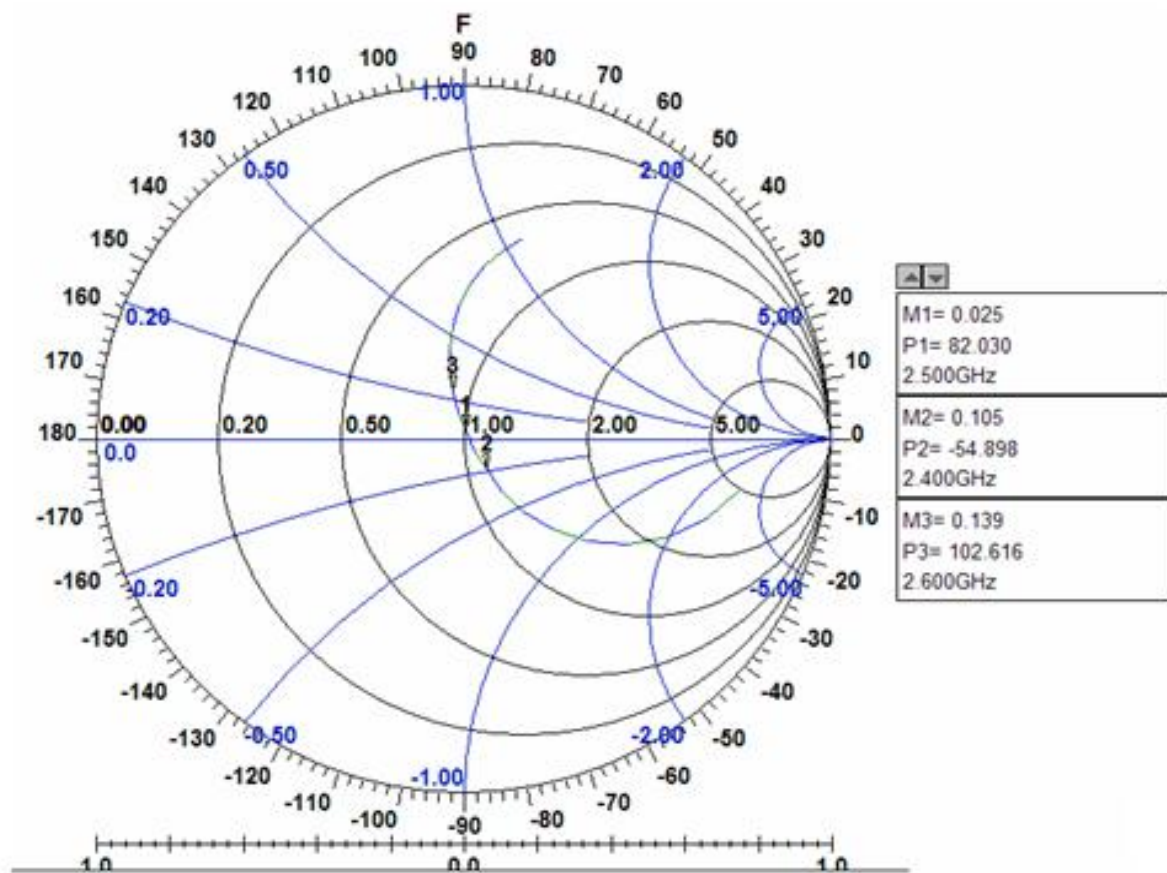


4. Radiation Patterns XY-plane

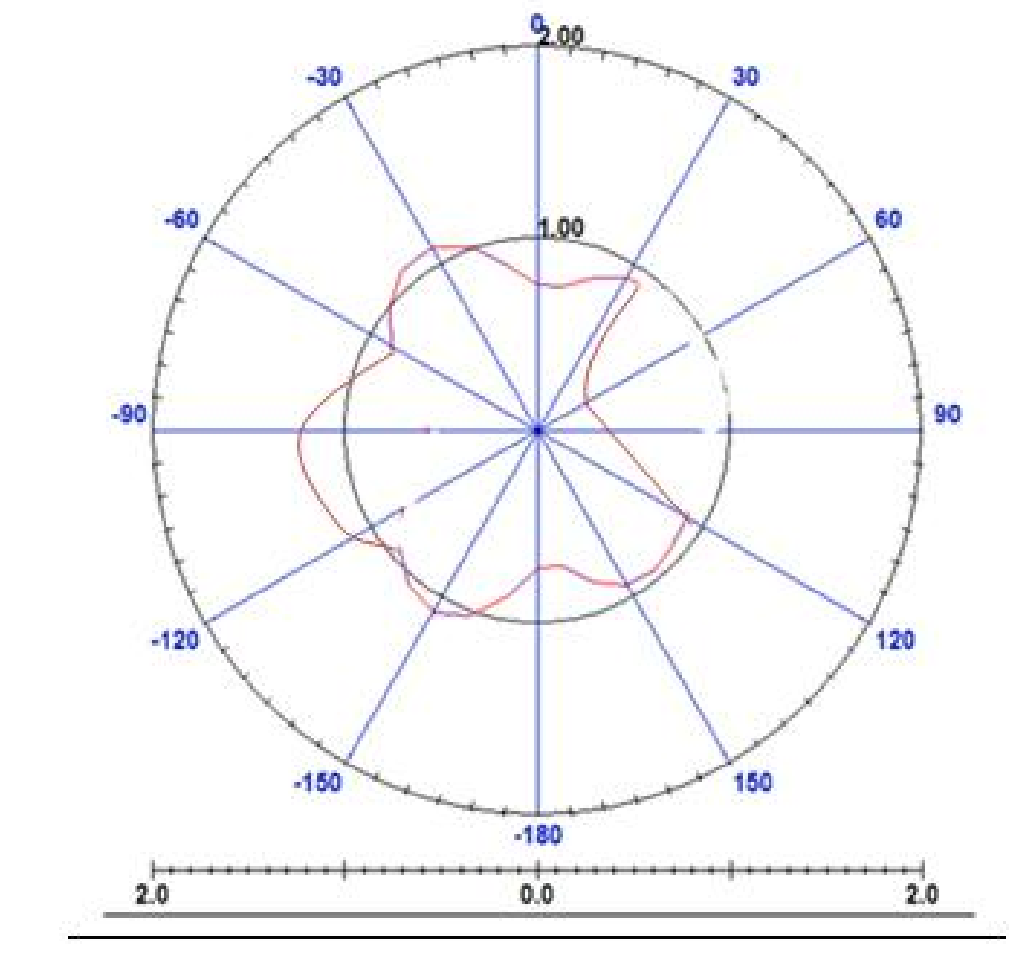

XZ-plane

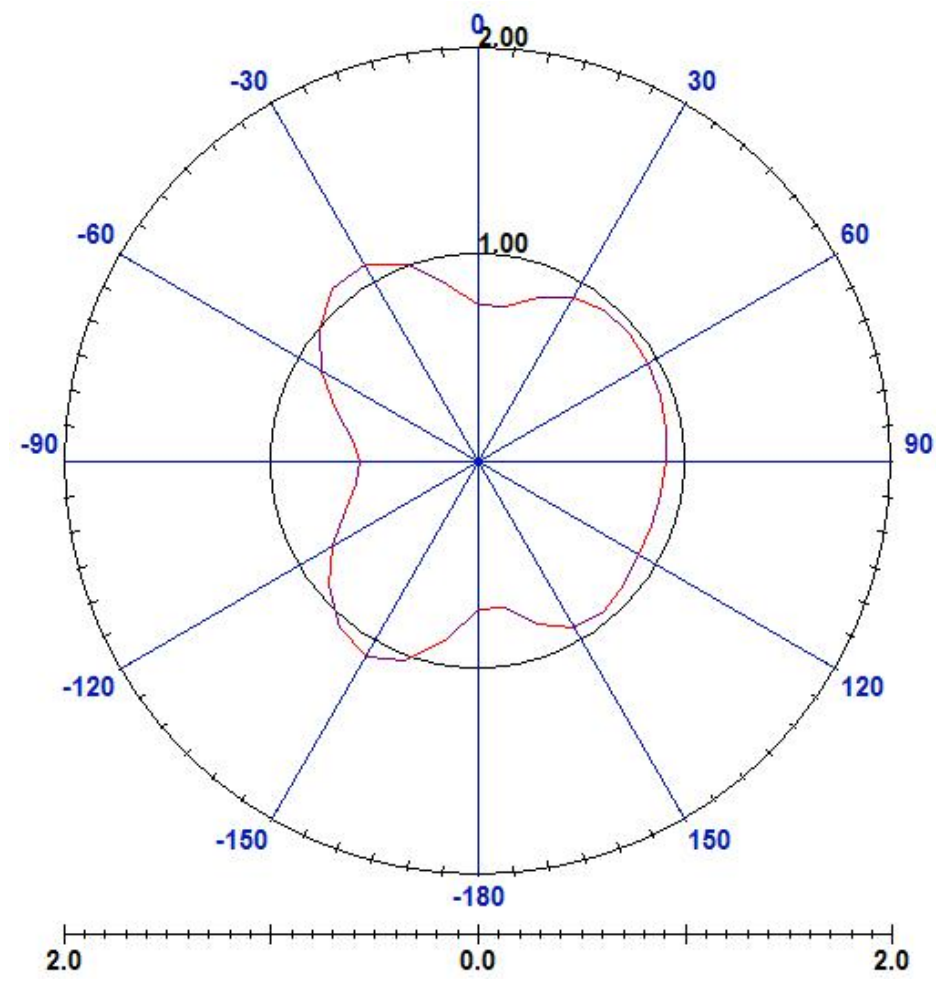

YZ-plane

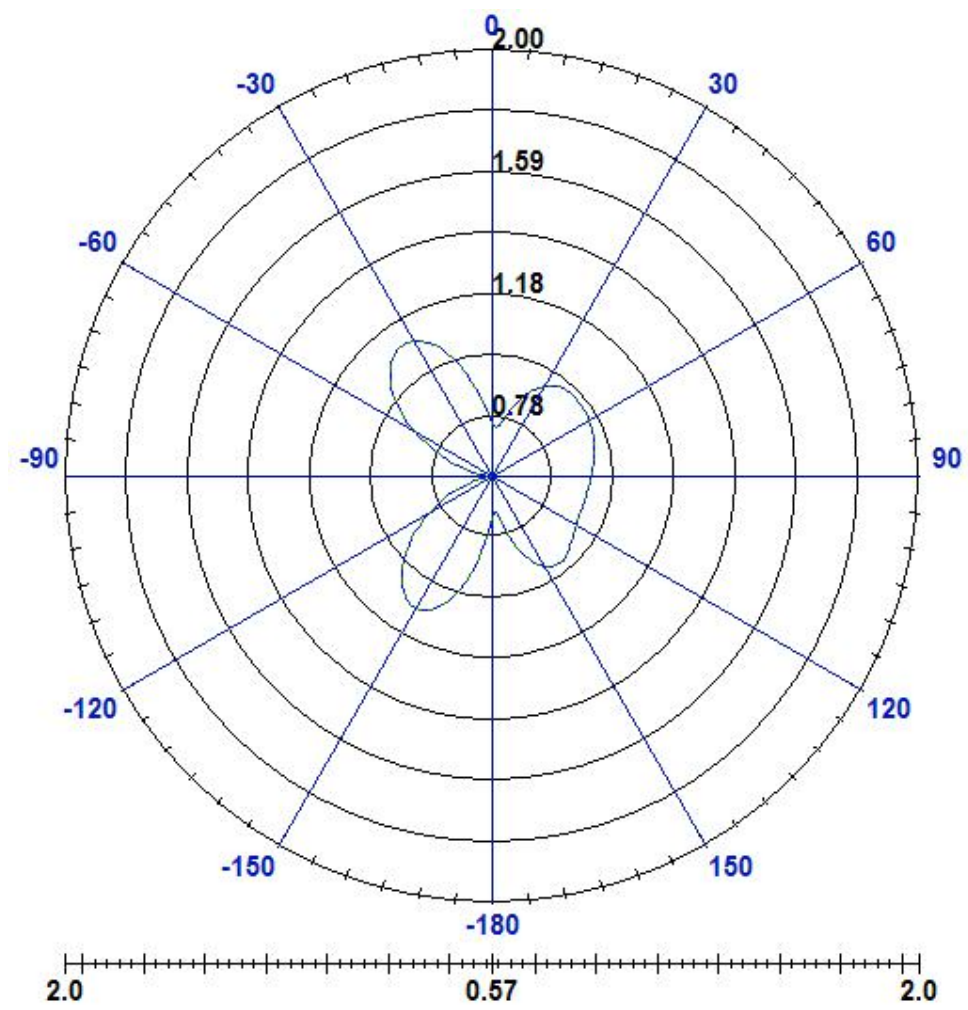

3D Radiation field type

