

Appendix B_Radiated Spurious Emission Data for 5GHz WIFI:

1.Radiated Spurious Emission and Restricted Band

For 9 kHz ~ 30 MHz

Note:

- 1.The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.
- 2.The all data rate modes had been test, but only worse test data was recorded in the test report.


Below 1GHz:

Note:


- 1.All modes have been tested, only worst (MIMO 802.11ax40-TX Channel 159)mode was recorded in the test report.
- 2.Emission Level (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).
- 3.Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)-Amplifier Gain.
- 4.The emission levels of other frequencies were less than 20dB margin against the limit.
- 5.Margin value = Emission level-Limit value.

Radiated Spurious Emission:

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Horizontal	Mode	802.11ax40-TX Channel 159 MIMO

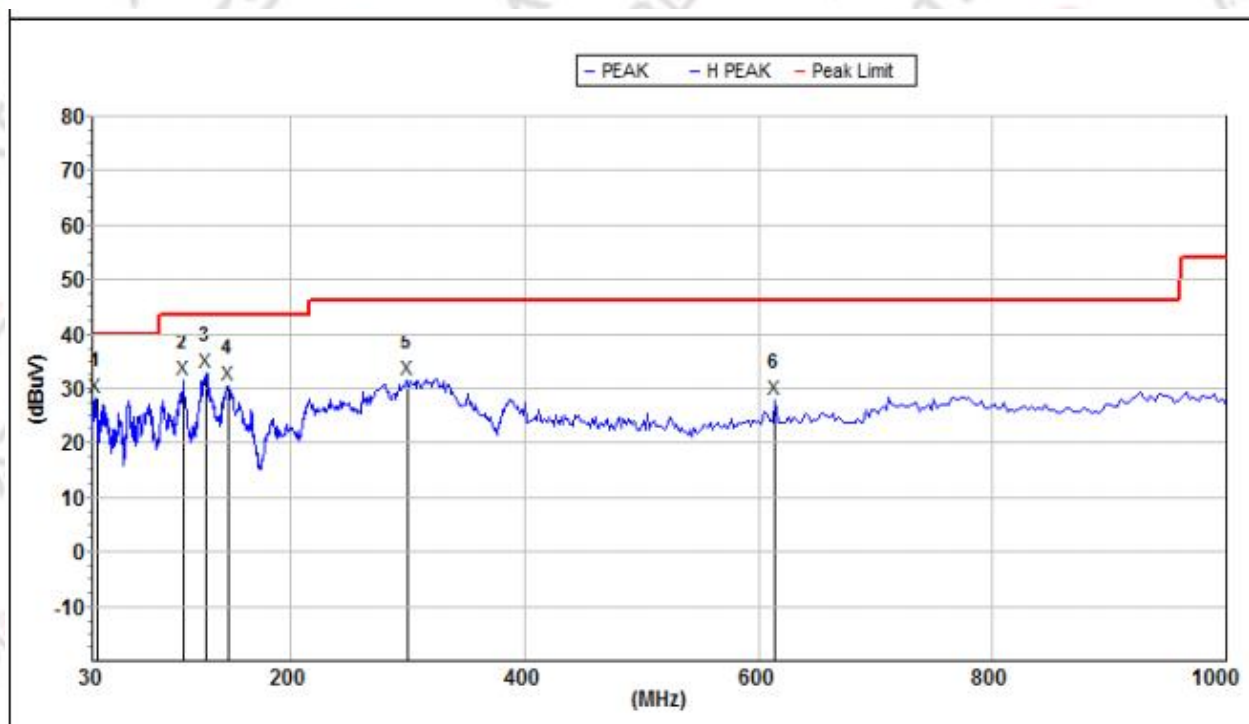

Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	32.979	70.3	-42.0	28.3	40.0	11.7	H
2	107.888	69.7	-38.1	31.6	43.5	11.9	H
3	126.772	67.1	-34.1	33.0	43.5	10.5	H
4	146.373	65.0	-34.2	30.8	43.5	12.7	H
5	299.316	59.0	-27.2	31.8	46.0	14.2	H
6	614.214	48.9	-20.9	28.0	46.0	18.0	H

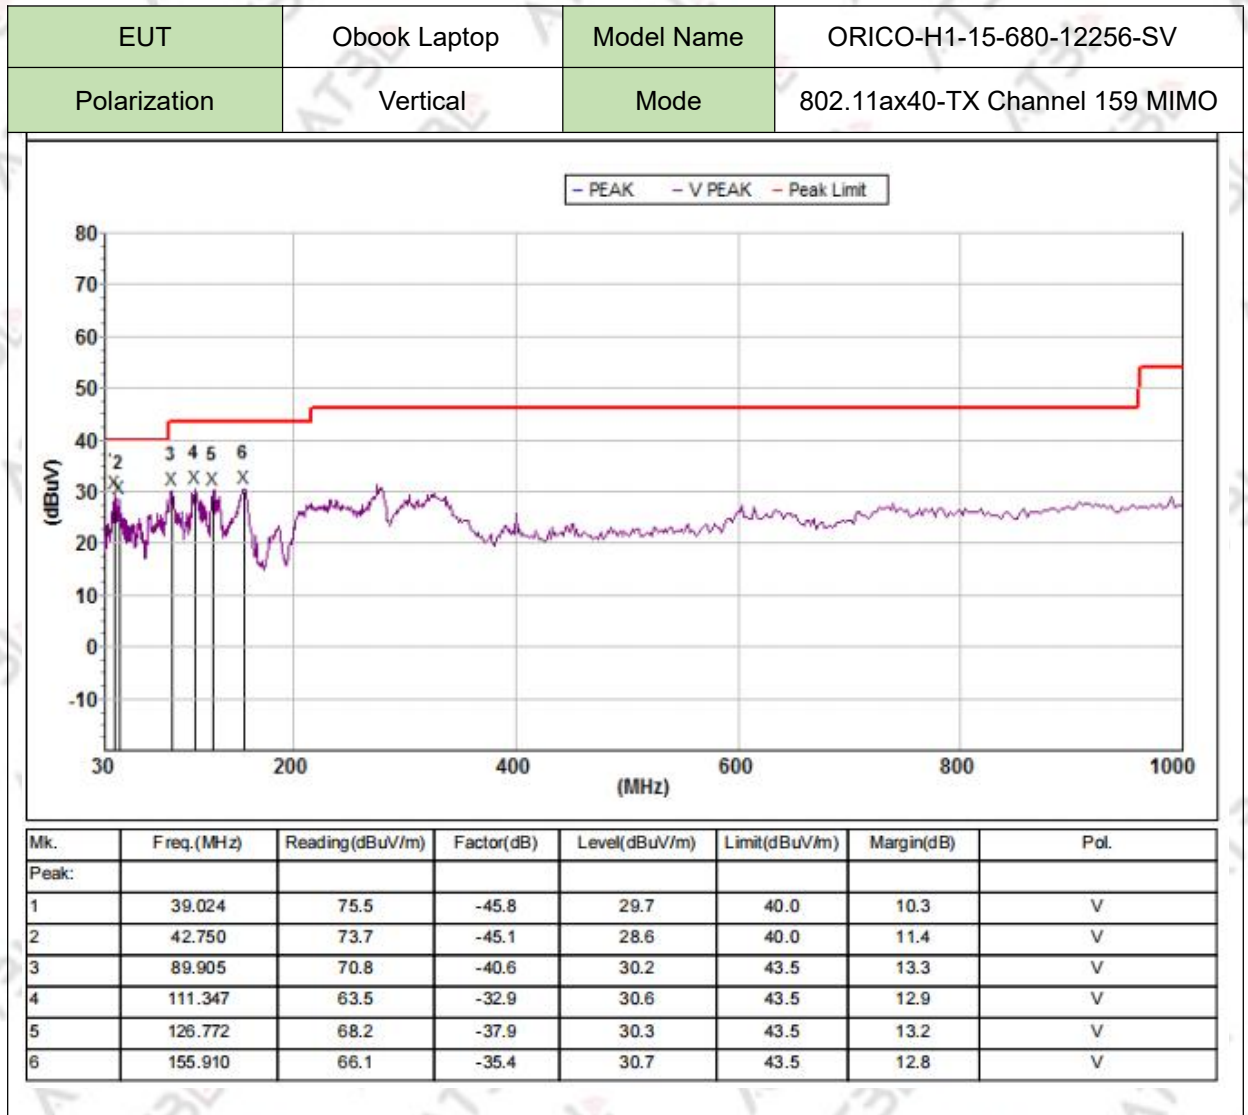


Above 1GHz:

Note:

- 1.All the modes have been tested. The report only records the worst data, performance in the (Antenna 1_802.11A) mode.
- 2.We used the filter to test and the main frequency was filtered out.
- 3.Emission Level (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).
4. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)-Amplifier Gain.
5. Margin value = Emission level-Limit value.
- 6.While performing the testing, the notch filter is used for avoiding test instrument overload.


For U-NII-1:

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Horizontal	Test Mode	Antenna 1_802.11a-TX Channel 36

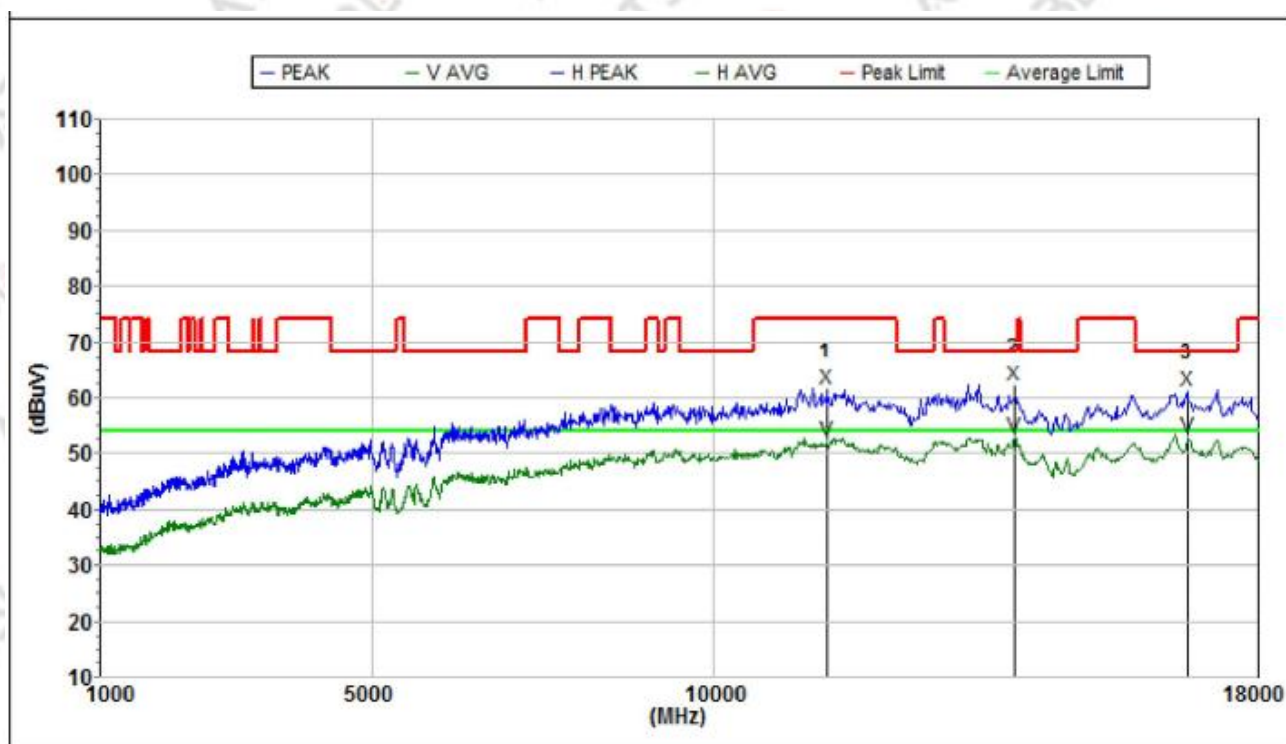


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	11676.000	59.1	2.6	61.7	74.0	12.3	H
2	14413.000	60.0	2.3	62.3	68.2	5.9	H
3	16954.500	57.3	4.0	61.3	68.2	6.9	H
Avg							
1	11676.000	49.9	2.6	52.5	54.0	1.5	H
2	14413.000	50.8	2.3	53.1	54.0	0.9	H
3	16954.500	49.0	4.0	53.0	54.0	1.0	H

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Vertical	Test Mode	Antenna 1_802.11a-TX Channel 36

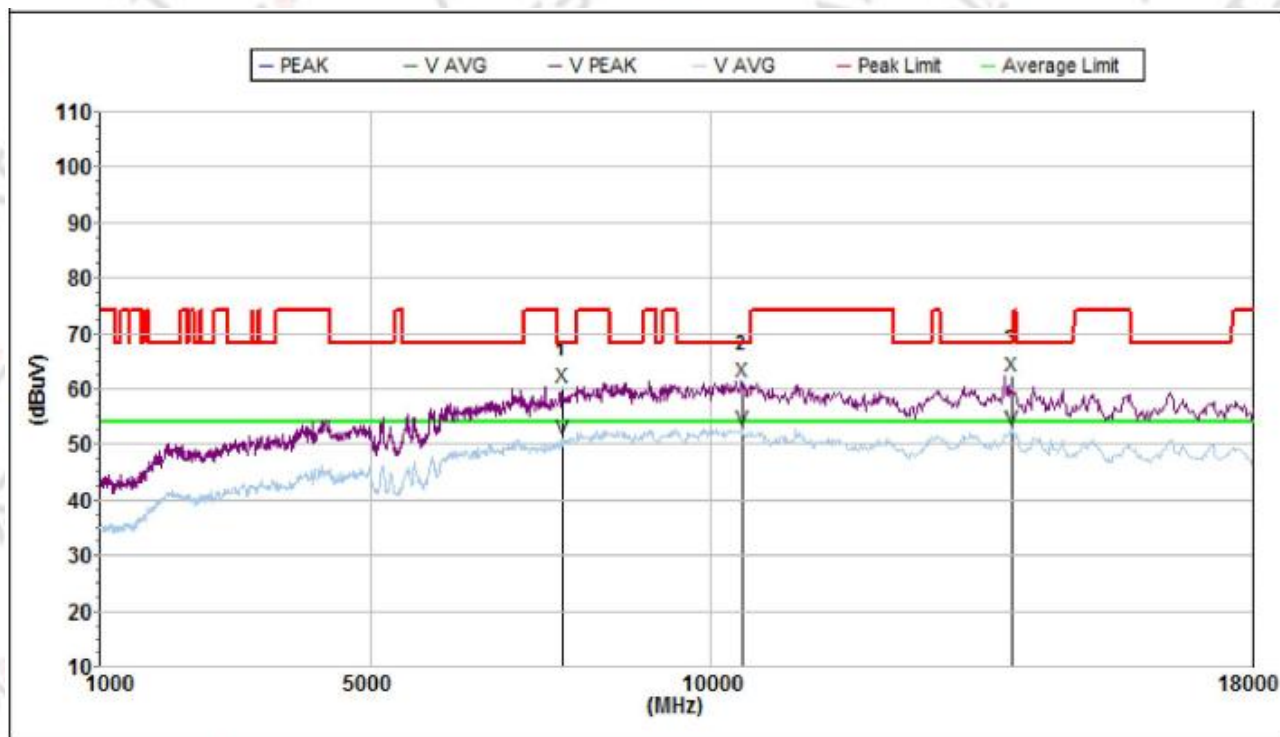


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	7825.500	58.6	1.6	60.2	68.2	8.0	V
2	10460.500	58.0	3.3	61.3	68.2	6.9	V
3	14438.500	59.8	2.4	62.2	68.2	6.0	V
Avg							
1	7825.500	49.4	1.6	51.0	54.0	3.0	V
2	10460.500	49.3	3.3	52.6	54.0	1.4	V
3	14438.500	50.2	2.4	52.6	54.0	1.4	V

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Horizontal	Mode	Antenna 1_802.11a-TX Channel 40

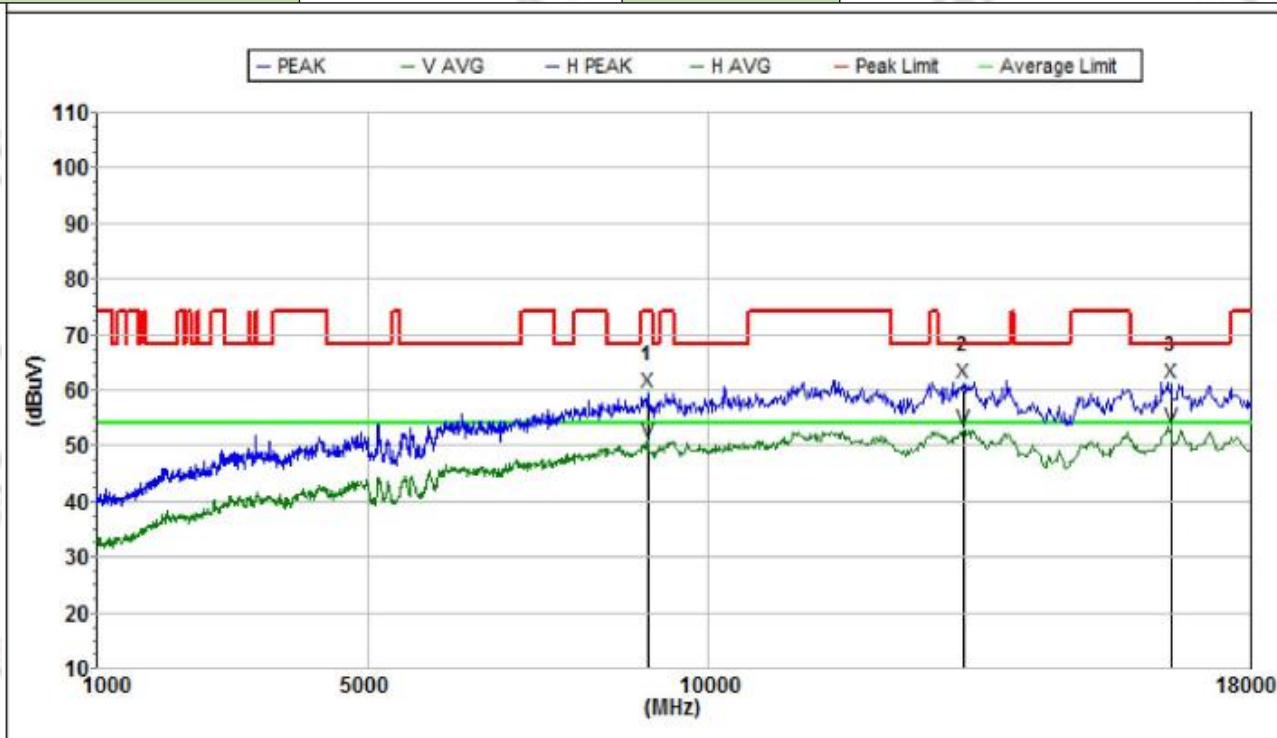


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	9117.500	59.6	0.0	59.6	74.0	14.4	H
2	13767.000	58.6	2.7	61.3	68.2	6.9	H
3	16827.000	57.5	3.9	61.4	68.2	6.8	H
Avg							
1	9117.500	50.7	0.0	50.7	54.0	3.3	H
2	13767.000	50.3	2.7	53.0	54.0	1.0	H
3	16827.000	49.6	3.9	53.5	54.0	0.5	H

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Vertical	Mode	Antenna 1_802.11a-TX Channel 40

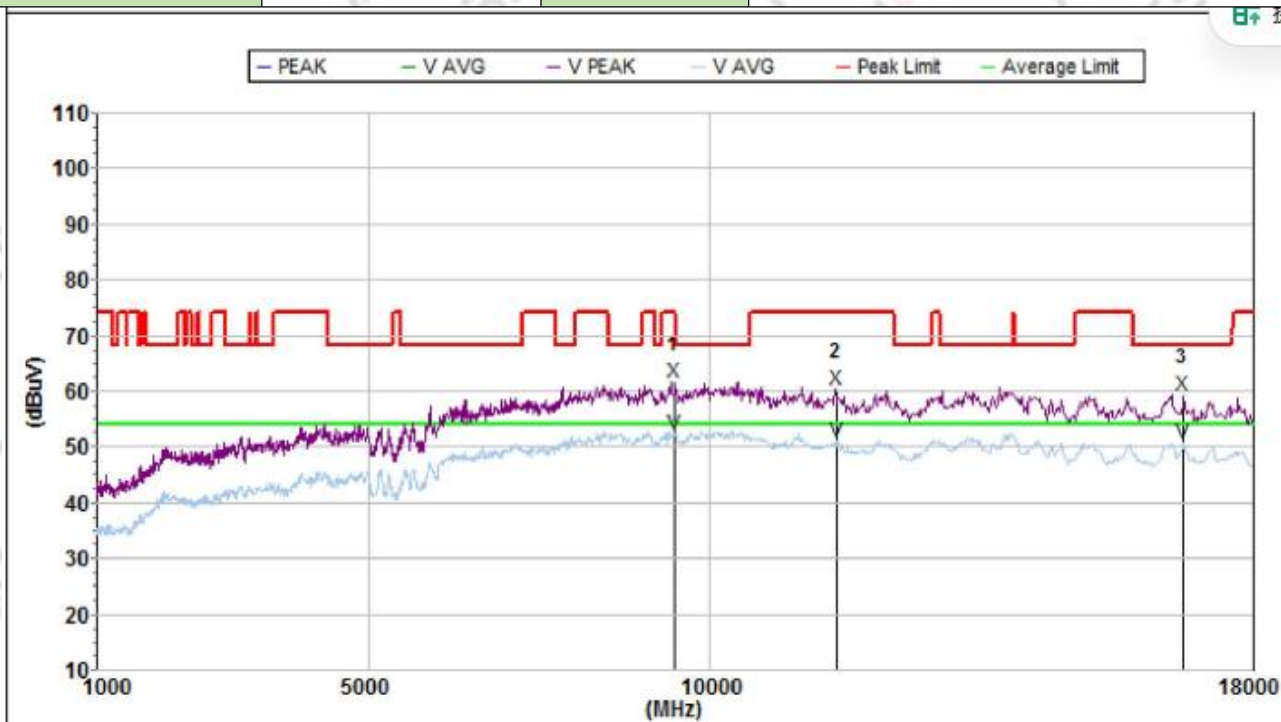


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	9474.500	59.4	2.3	61.7	74.0	12.3	V
2	11871.500	59.3	1.1	60.4	74.0	13.6	V
3	16971.500	57.9	1.6	59.5	68.2	8.7	V
Avg							
1	9474.500	50.1	2.3	52.4	54.0	1.6	V
2	11871.500	49.9	1.1	51.0	54.0	3.0	V
3	16971.500	49.2	1.6	50.8	54.0	3.2	V

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Horizontal	Mode	Antenna 1_802.11a-TX Channel 48

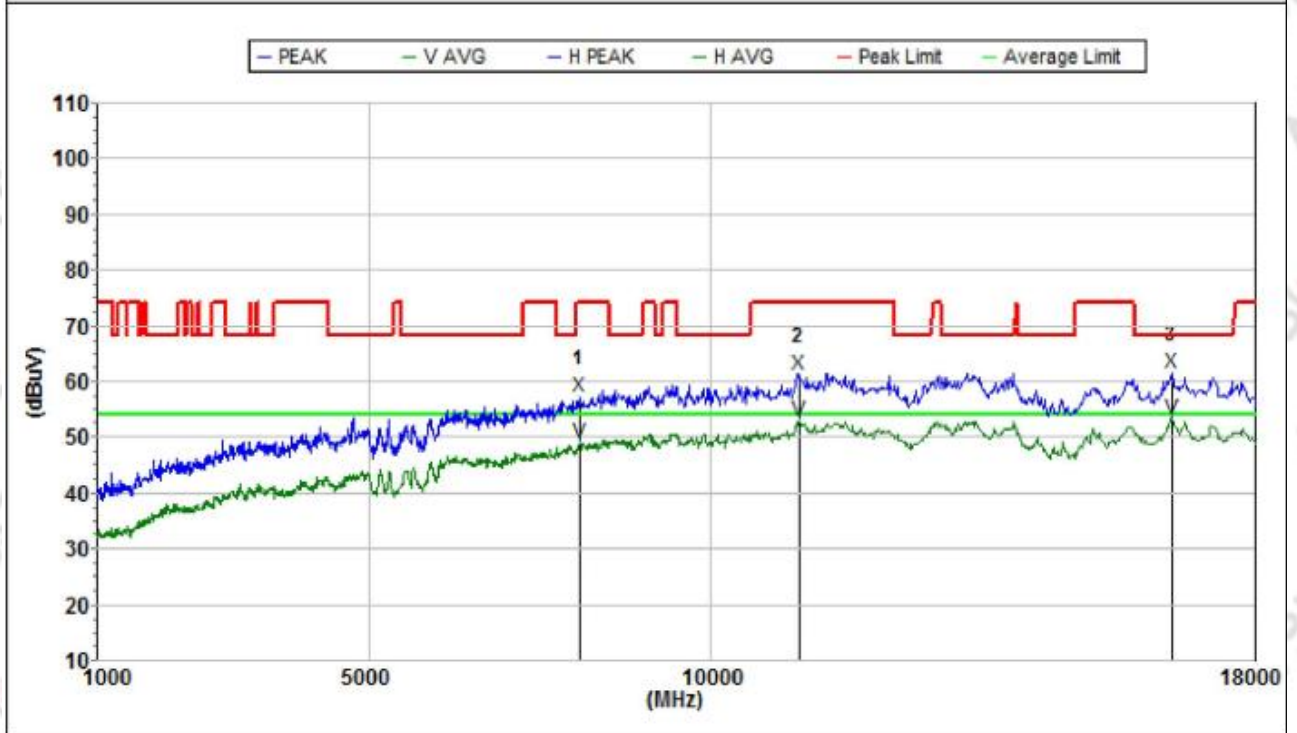


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	8080.500	58.2	-0.9	57.3	74.0	16.7	H
2	11302.000	59.1	2.1	61.2	74.0	12.8	H
3	16776.000	57.8	3.8	61.6	68.2	6.6	H
Avg							
1	8080.500	50.1	-0.9	49.2	54.0	4.8	H
2	11302.000	50.9	2.1	53.0	54.0	1.0	H
3	16776.000	49.6	3.8	53.4	54.0	0.6	H

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Vertical	Mode	Antenna 1_802.11a-TX Channel 48

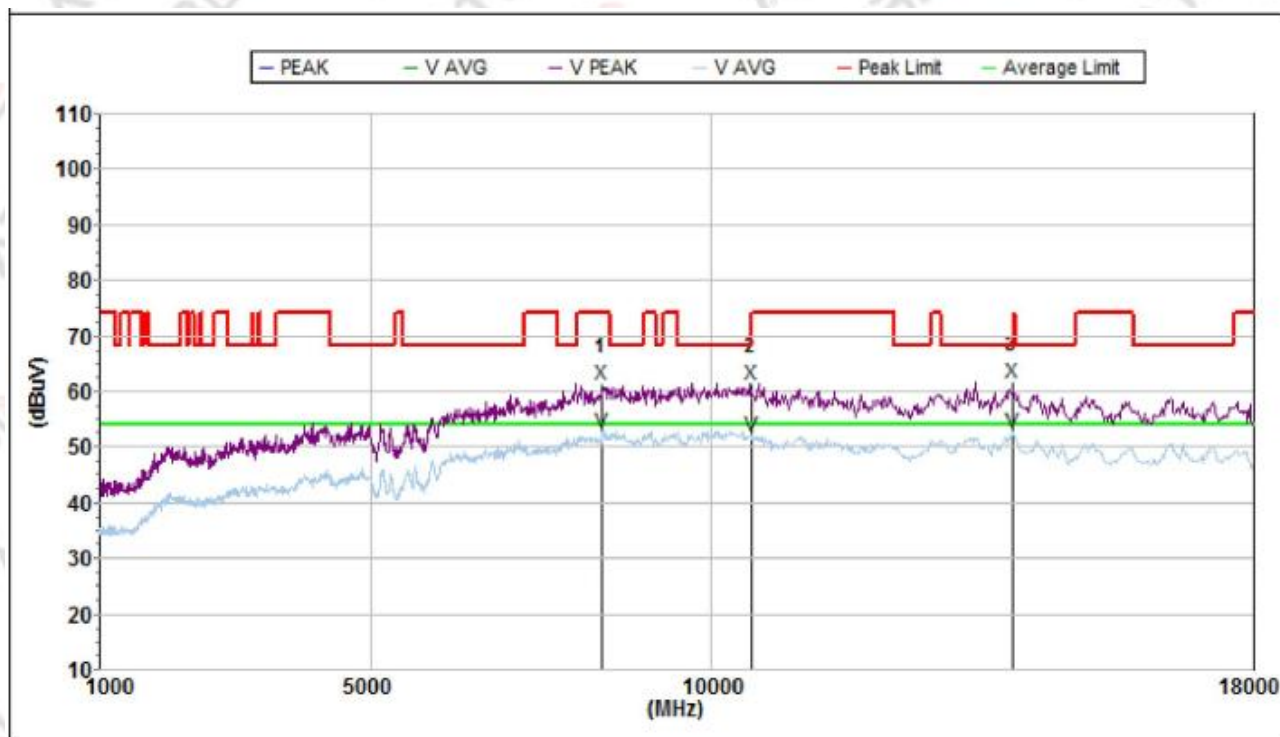


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	8403.500	58.8	2.4	61.2	74.0	12.8	V
2	10613.500	58.3	3.1	61.4	74.0	12.6	V
3	14455.500	59.0	2.5	61.5	68.2	6.7	V
Avg							
1	8403.500	50.4	2.4	52.8	54.0	1.2	V
2	10613.500	48.9	3.1	52.0	54.0	2.0	V
3	14455.500	50.3	2.5	52.8	54.0	1.2	V

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Horizontal	Mode	Antenna 1_802.11a-TX Channel 149

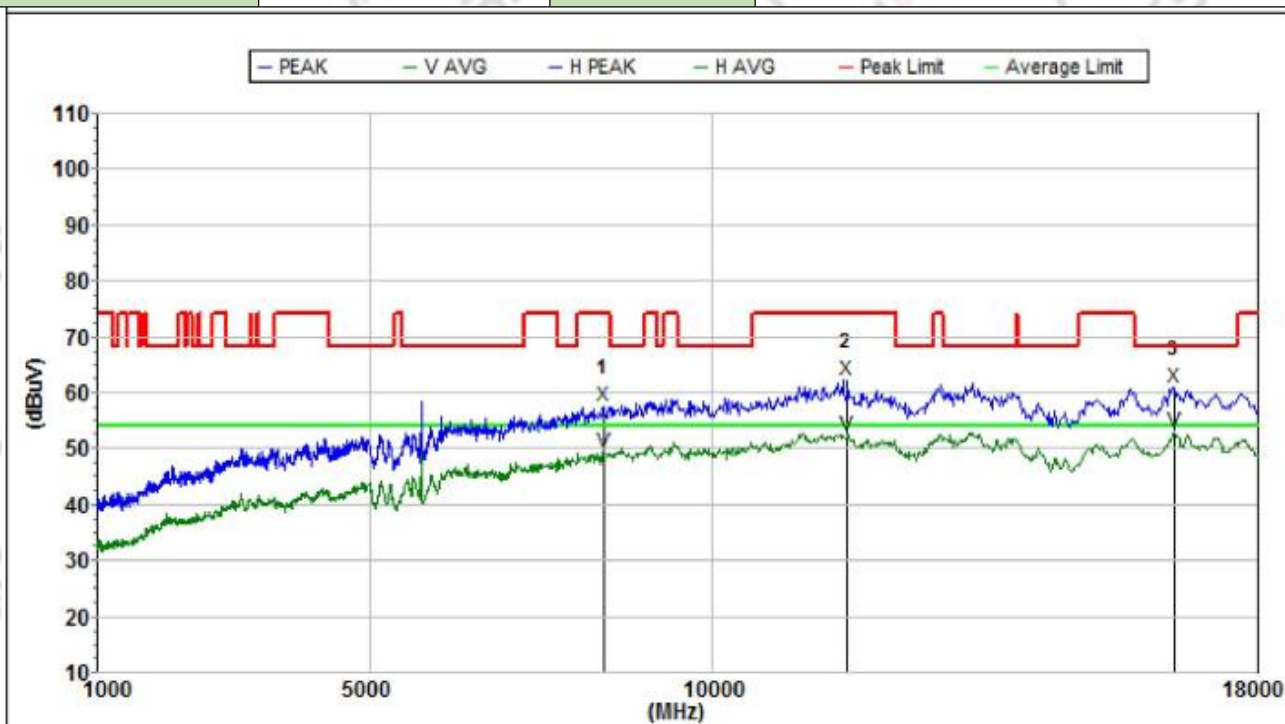


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	8412.000	58.2	-0.6	57.6	74.0	16.4	H
2	11990.500	59.1	3.1	62.2	74.0	11.8	H
3	16776.000	57.2	3.8	61.0	68.2	7.2	H
Avg							
1	8412.000	50.0	-0.6	49.4	54.0	4.6	H
2	11990.500	49.2	3.1	52.3	54.0	1.7	H
3	16776.000	49.4	3.8	53.2	54.0	0.8	H

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Vertical	Mode	Antenna 1_802.11a-TX Channel 149

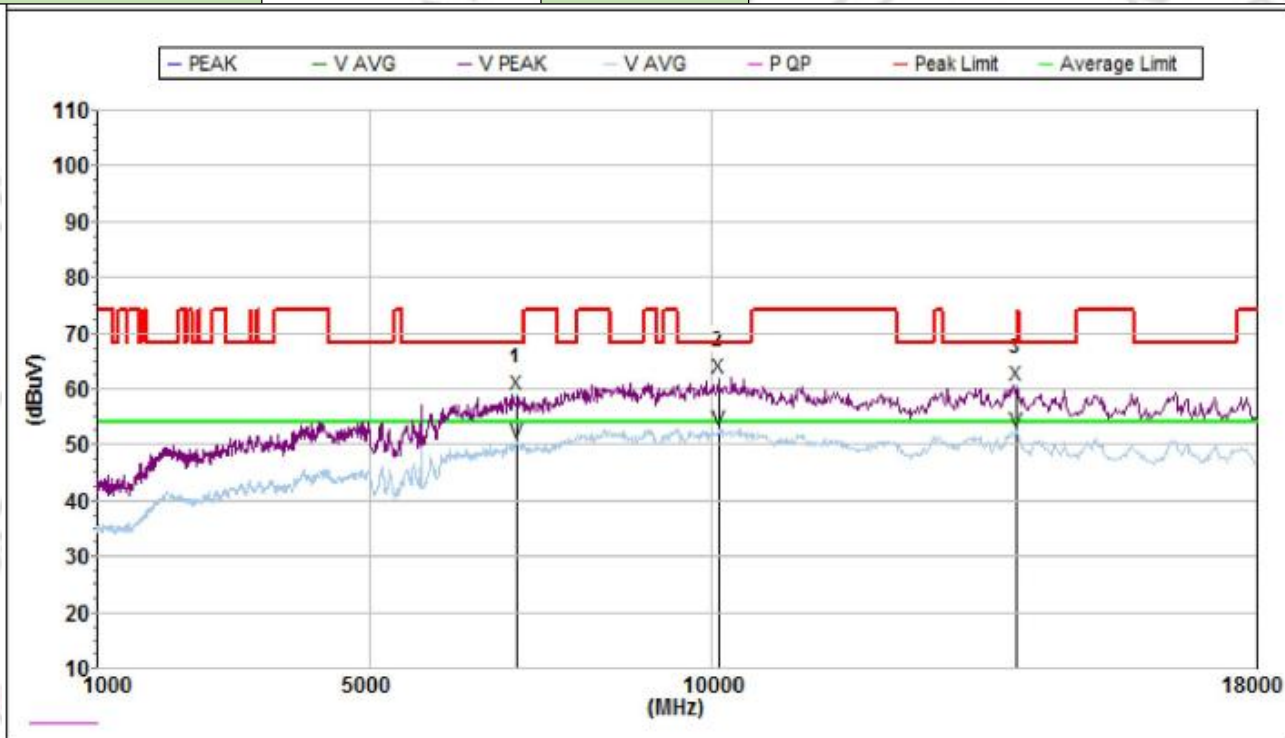


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	7162.500	58.3	0.7	59.0	68.2	9.2	V
2	10120.500	59.0	3.1	62.1	68.2	6.1	V
3	14464.000	58.2	2.5	60.7	68.2	7.5	V
Avg							
1	7162.500	49.8	0.7	50.5	54.0	3.5	V
2	10120.500	49.8	3.1	52.9	54.0	1.1	V
3	14464.000	49.8	2.5	52.3	54.0	1.7	V

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Horizontal	Mode	Antenna 1_802.11a-TX Channel 157

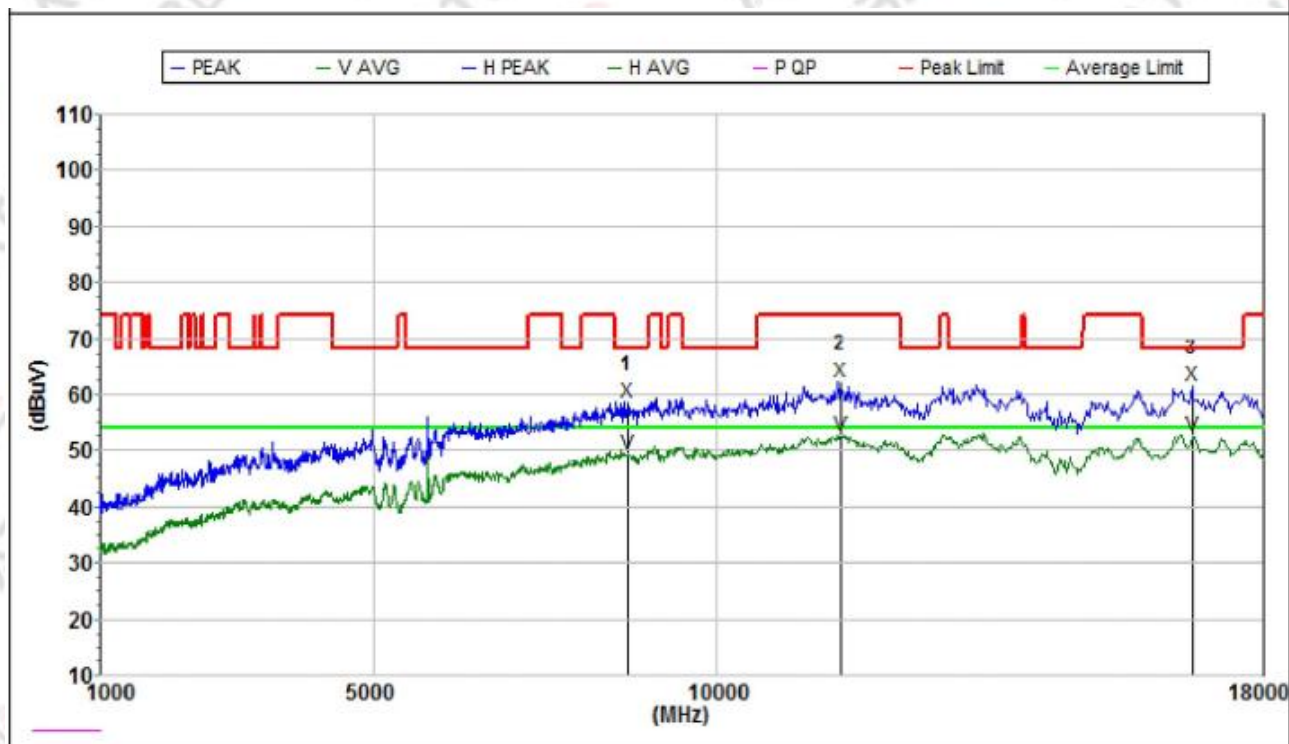


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	8709.500	59.2	-0.4	58.8	68.2	9.4	H
2	11829.000	59.5	2.9	62.4	74.0	11.6	H
3	16963.000	57.6	4.0	61.6	68.2	6.6	H
Avg							
1	8709.500	50.0	-0.4	49.6	54.0	4.4	H
2	11829.000	49.8	2.9	52.7	54.0	1.3	H
3	16963.000	48.8	4.0	52.8	54.0	1.2	H

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Vertical	Mode	Antenna 1_802.11a-TX Channel 157

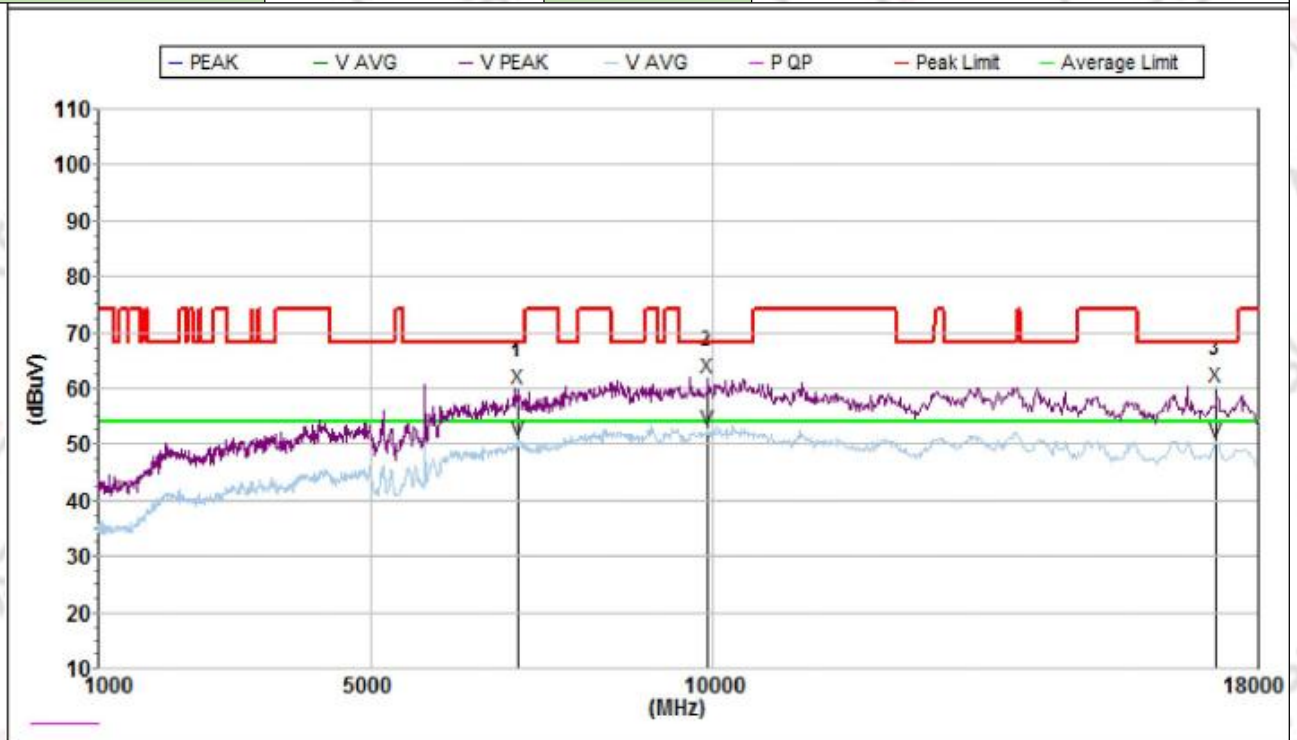


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	7154.000	59.2	0.7	59.9	68.2	8.3	V
2	9916.500	59.1	2.9	62.0	68.2	6.2	V
3	17388.000	59.0	1.3	60.3	68.2	7.9	V
Avg							
1	7154.000	50.1	0.7	50.8	54.0	3.2	V
2	9916.500	49.8	2.9	52.7	54.0	1.3	V
3	17388.000	49.3	1.3	50.6	54.0	3.4	V

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Horizontal	Mode	Antenna 1_802.11a-TX Channel 165

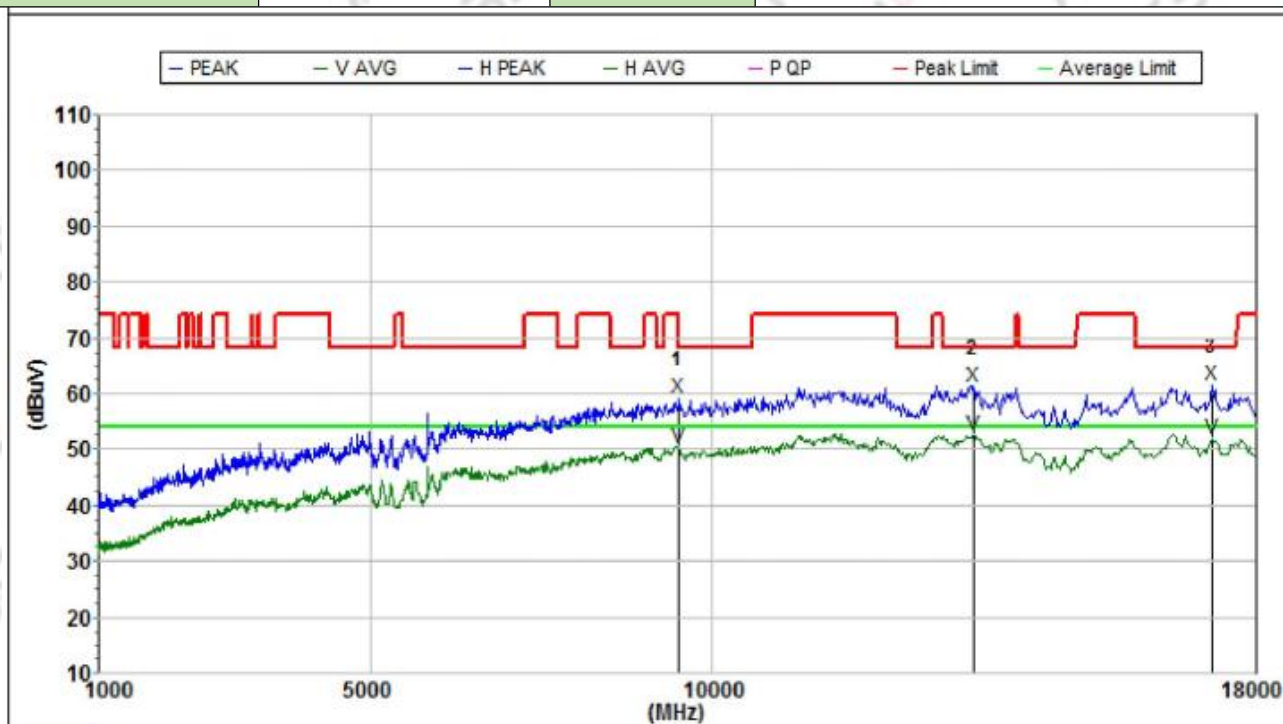

Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	9508.500	58.9	0.5	59.4	68.2	8.8	H
2	13852.000	58.9	2.5	61.4	68.2	6.8	H
3	17354.000	58.3	3.5	61.8	68.2	6.4	H
Avg							
1	9508.500	50.1	0.5	50.6	54.0	3.4	H
2	13852.000	50.1	2.5	52.6	54.0	1.4	H
3	17354.000	48.6	3.5	52.1	54.0	1.9	H

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Vertical	Mode	Antenna 1_802.11a-TX Channel 165

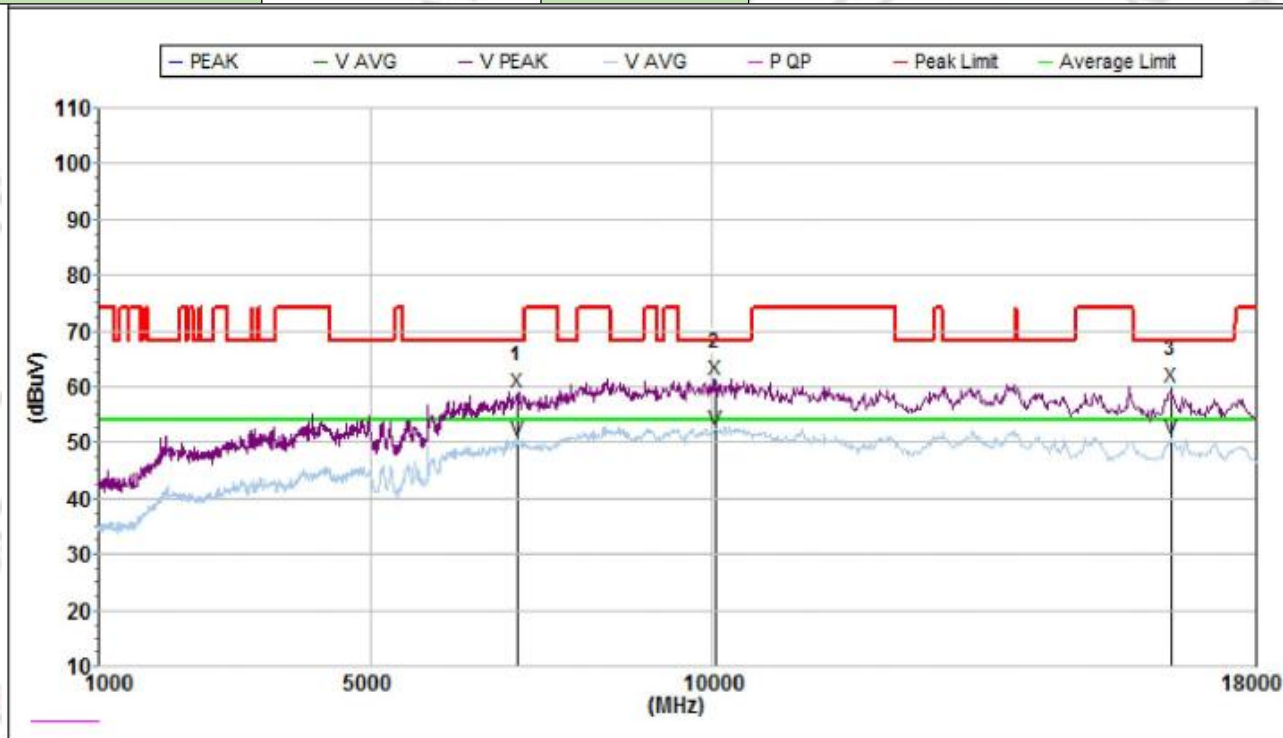


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	7162.500	58.4	0.7	59.1	68.2	9.1	V
2	10061.000	58.1	3.1	61.2	68.2	7.0	V
3	16750.500	58.3	1.7	60.0	68.2	8.2	V
Avg							
1	7162.500	49.8	0.7	50.5	54.0	3.5	V
2	10061.000	49.4	3.1	52.5	54.0	1.5	V
3	16750.500	49.0	1.7	50.7	54.0	3.3	V

18GHz~40GHz

Note:


All modes have been tested, only worst (MIMO 802.11ax40-TX Channel 159)mode was recorded in the test report.

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Horizontal	Mode	802.11ax40-TX Channel 159 MIMO

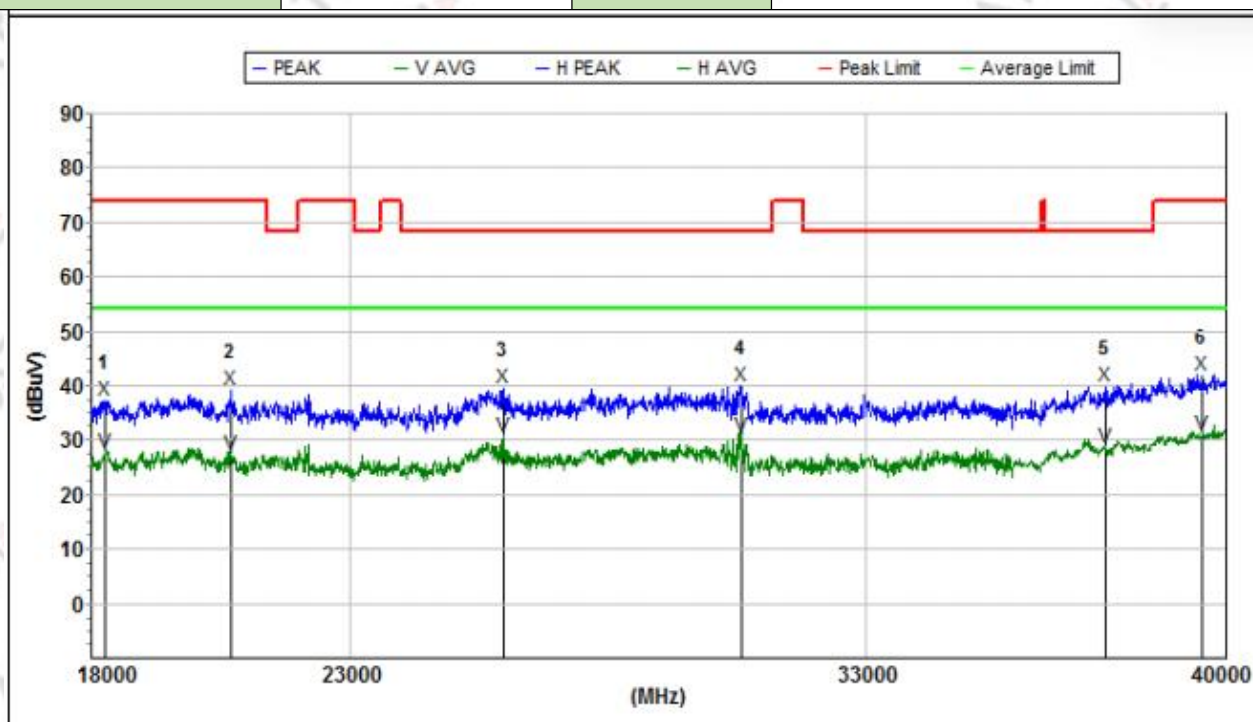

Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	18275.000	59.4	-21.9	37.5	74.0	36.5	H
2	20706.000	60.4	-20.9	39.5	74.0	34.5	H
3	25997.000	57.3	-17.6	39.7	68.2	28.5	H
4	30595.000	57.1	-17.1	40.0	68.2	28.2	H
5	37668.000	56.7	-16.6	40.1	68.2	28.1	H
6	39538.000	57.4	-15.3	42.1	74.0	31.9	H
Avg							
1	18275.000	49.7	-21.9	27.8	54.0	26.2	H
2	20706.000	48.4	-20.9	27.5	54.0	26.5	H
3	25997.000	48.3	-17.6	30.7	54.0	23.3	H
4	30595.000	47.9	-17.1	30.8	54.0	23.2	H
5	37668.000	45.4	-16.6	28.8	54.0	25.2	H
6	39538.000	46.5	-15.3	31.2	54.0	22.8	H

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Horizontal	Mode	802.11ax40-TX Channel 159 MIMO

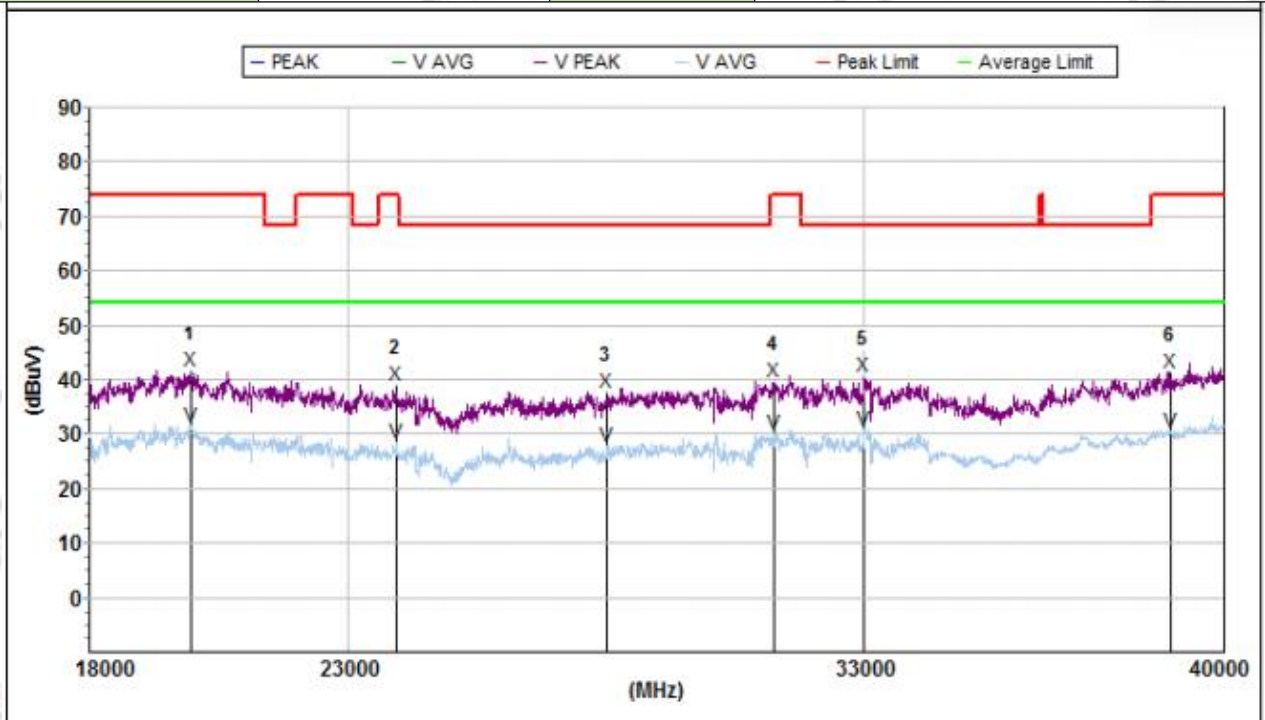

Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	19980.000	58.1	-16.5	41.6	74.0	32.4	V
2	23951.000	55.4	-16.4	39.0	74.0	35.0	V
3	28043.000	54.6	-17.0	37.6	68.2	30.6	V
4	31266.000	56.7	-16.9	39.8	74.0	34.2	V
5	33015.000	57.3	-16.5	40.8	68.2	27.4	V
6	38955.000	56.8	-15.4	41.4	74.0	32.6	V
Avg							
1	19980.000	48.1	-16.5	31.6	54.0	22.4	V
2	23951.000	44.9	-16.4	28.5	54.0	25.5	V
3	28043.000	44.8	-17.0	27.8	54.0	26.2	V
4	31266.000	47.0	-16.9	30.1	54.0	23.9	V
5	33015.000	47.3	-16.5	30.8	54.0	23.2	V
6	38955.000	46.0	-15.4	30.6	54.0	23.4	V

Restricted Band:

Test Result of Restricted Band


Note:

1.Only the worst MIMO 802.11ax data is represented in the report.

2.Margin=Level-Limit=Reading+factor-Limit


For 5150MHz~5250MHz:

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Horizontal	Mode	802.11ax20-TX Channel 36 MIMO

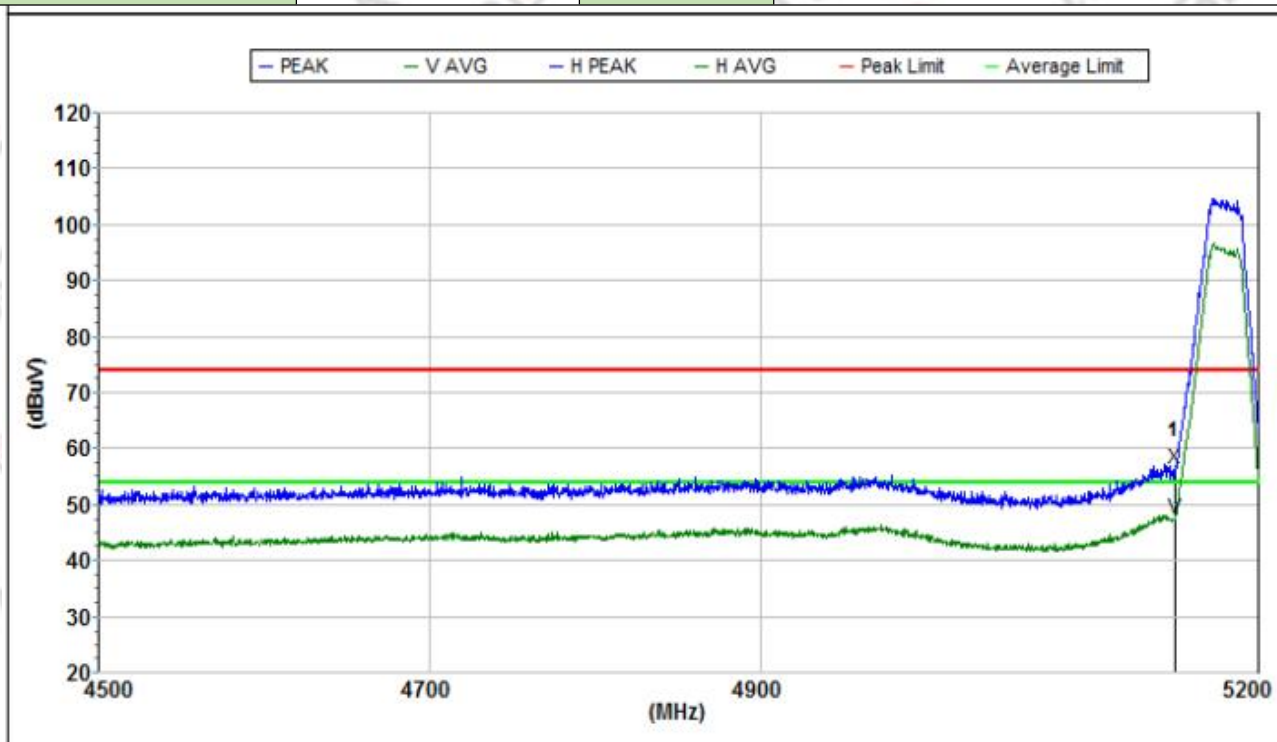


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	5150.000	59.4	-2.8	56.6	74.0	17.4	H
Avg							
1	5150.000	50.5	-2.8	47.7	54.0	6.3	H

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Vertical	Mode	802.11ax20-TX Channel 36 MIMO

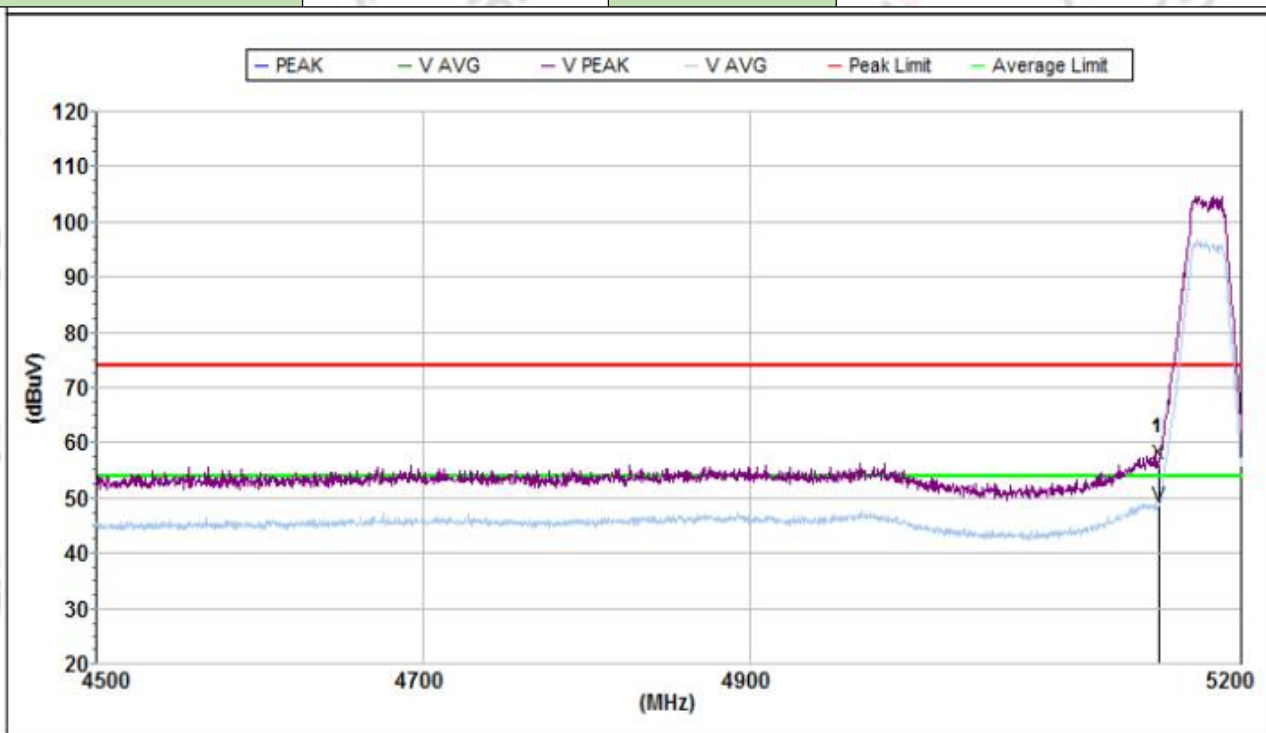


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	5150.000	57.7	-1.4	56.3	74.0	17.7	V
Avg							
1	5150.000	50.0	-1.4	48.6	54.0	5.4	V

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Horizontal	Mode	802.11ax40-TX Channel 38 MIMO

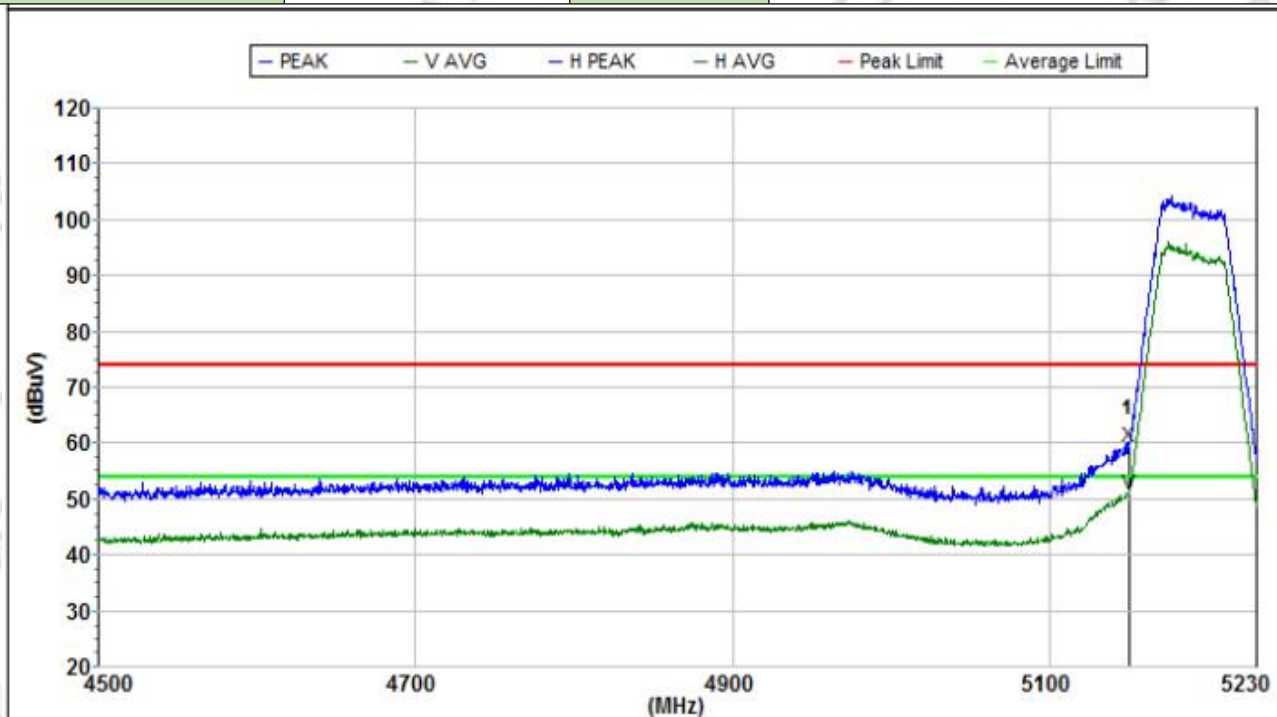


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	5150.000	58.9	0.6	59.5	74.0	14.5	H
Avg							
1	5150.000	50.3	0.6	50.9	54.0	3.1	H

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Vertical	Mode	802.11ax40-TX Channel 38 MIMO

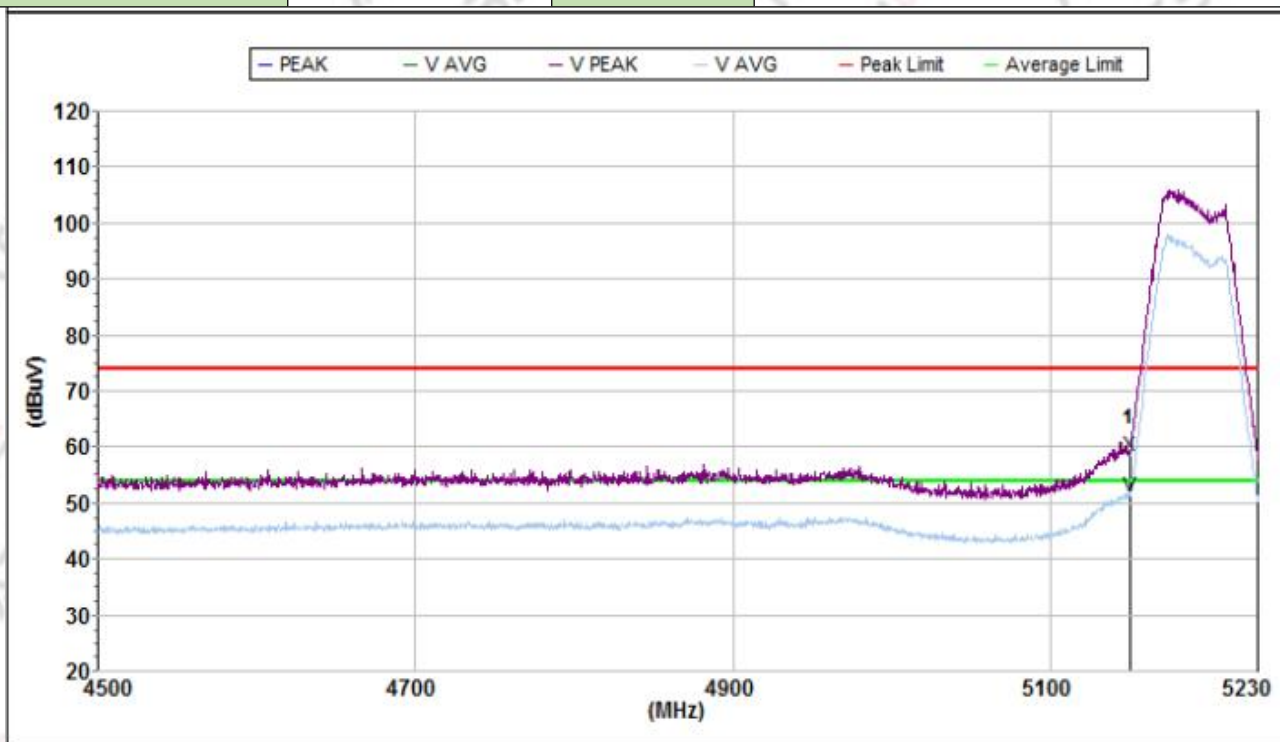


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	5150.000	57.5	1.1	58.6	74.0	15.4	V
Avg							
1	5150.000	50.0	1.1	51.1	54.0	2.9	V

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Horizontal	Mode	802.11ax80-TX Channel 42 MIMO

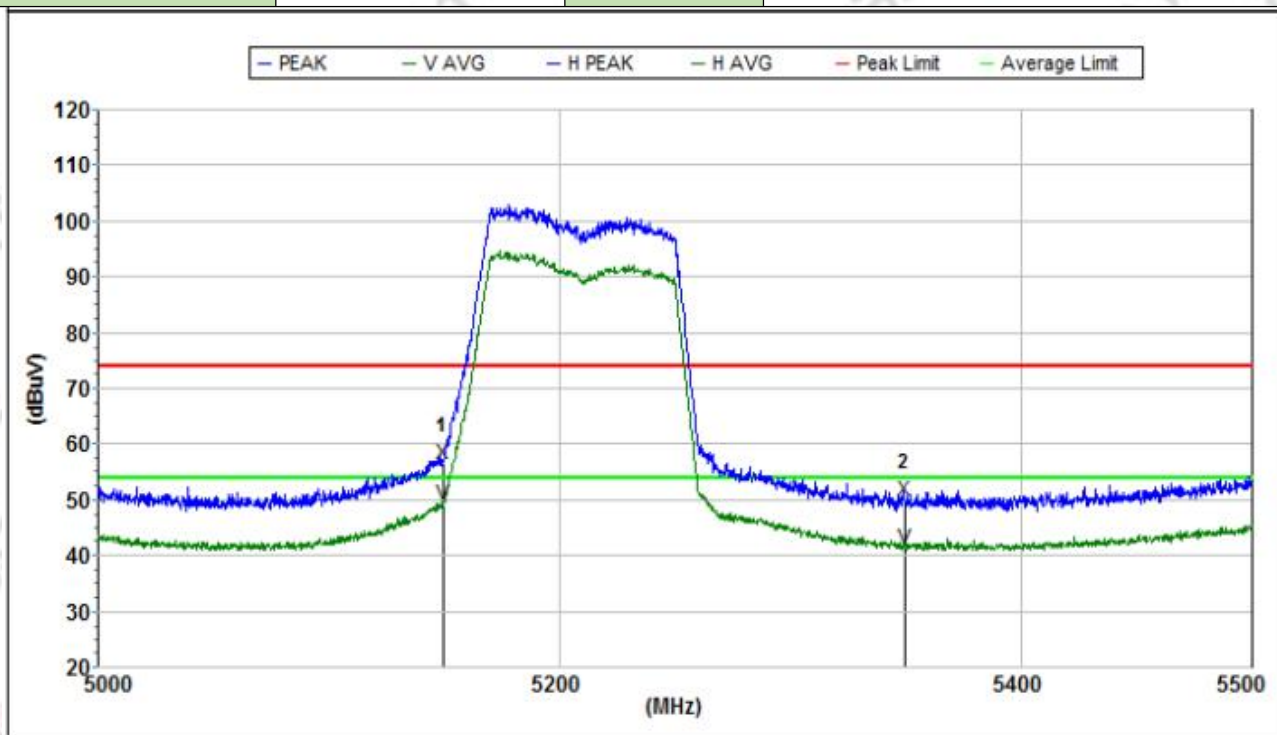

Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	5150.000	56.9	-0.4	56.5	74.0	17.5	H
2	5350.000	54.4	-4.6	49.8	74.0	24.2	H
Avg							
1	5150.000	49.6	-0.4	49.2	54.0	4.8	H
2	5350.000	45.9	-4.6	41.3	54.0	12.7	H


EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Vertical	Mode	802.11ax80-TX Channel 42 MIMO

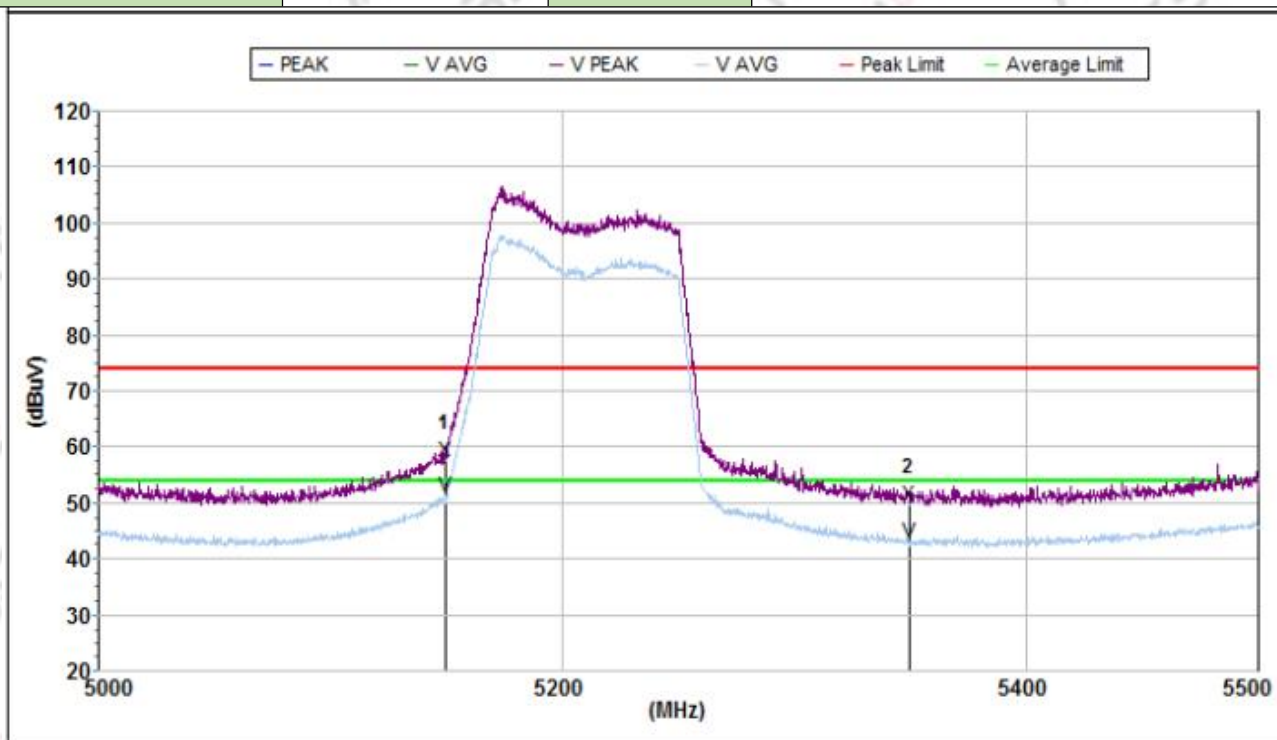

Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	5150.000	56.4	1.0	57.4	74.0	16.6	V
2	5350.000	52.9	-3.2	49.7	74.0	24.3	V
Avg							
1	5150.000	50.4	1.0	51.4	54.0	2.6	V
2	5350.000	46.2	-3.2	43.0	54.0	11.0	V


For (5725-5875MHz)

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Horizontal	Mode	802.11ax20-TX Channel 149 MIMO

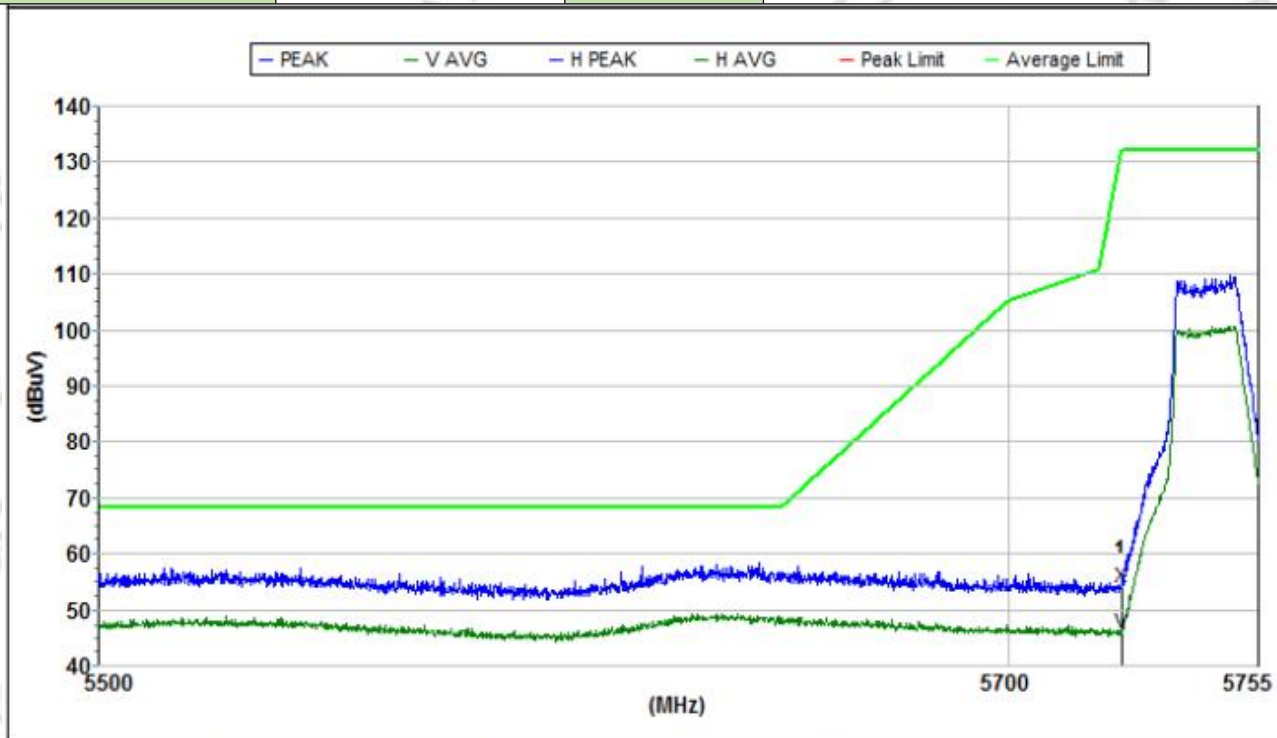


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	5725.000	54.7	-0.6	54.1	132.0	77.9	H
Avg							
1	5725.000	46.5	-0.6	45.9	132.0	86.1	H

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Vertical	Mode	802.11ax20-TX Channel 149 MIMO

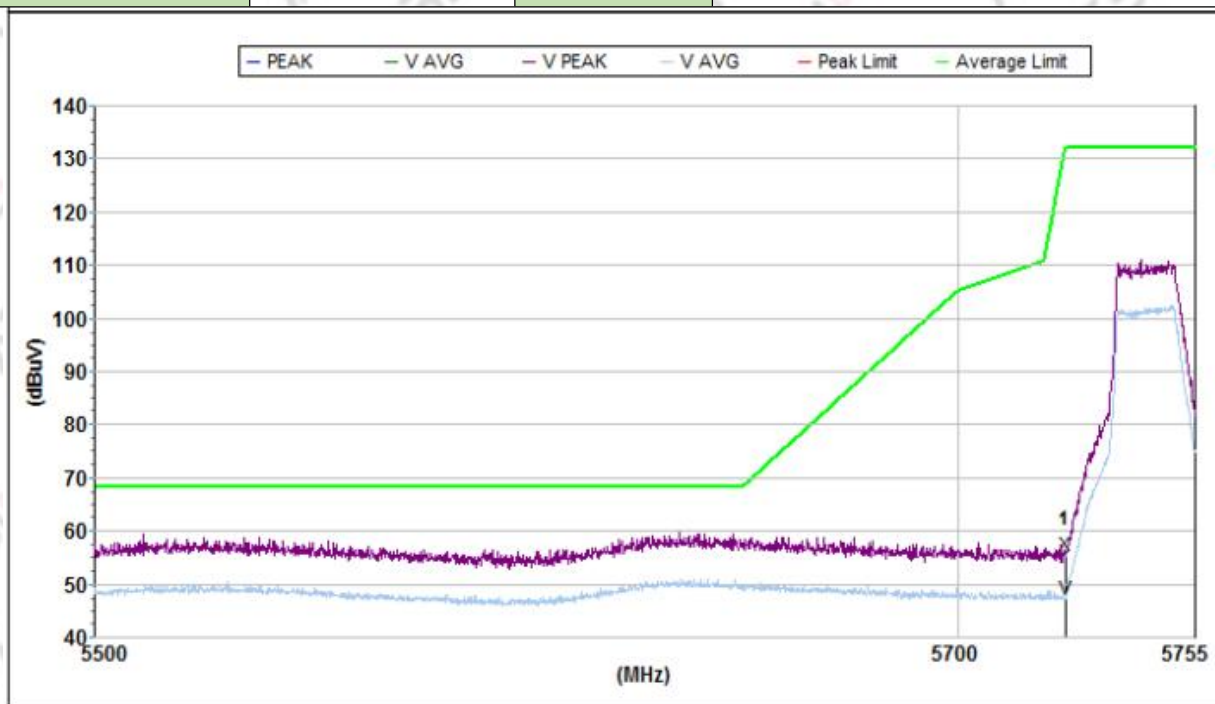


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	5725.000	54.3	1.1	55.4	132.0	76.6	V
Avg							
1	5725.000	46.1	1.1	47.2	132.0	84.8	V

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Horizontal	Mode	802.11ax20-TX Channel 165 MIMO

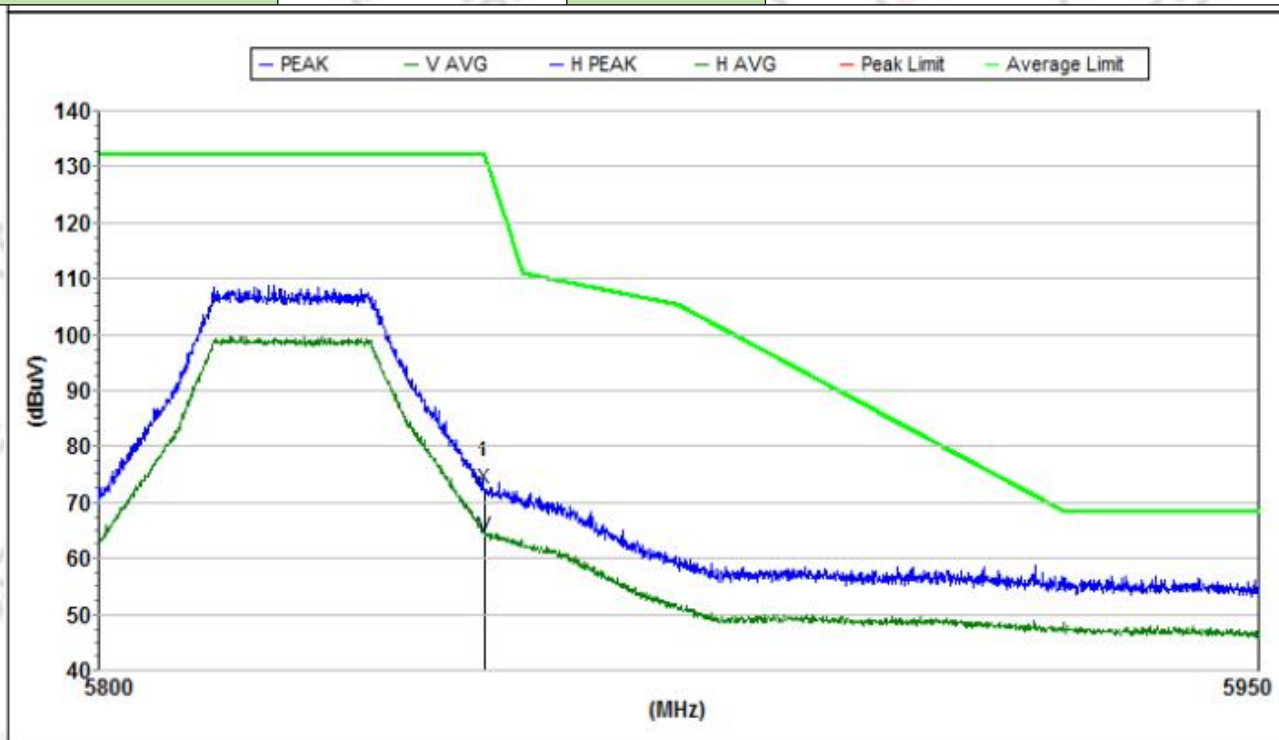


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	5850.000	55.6	16.9	72.5	132.0	59.5	H
Avg							
1	5850.000	47.2	16.9	64.1	132.0	67.9	H

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Vertical	Mode	802.11ax20-TX Channel 165 MIMO

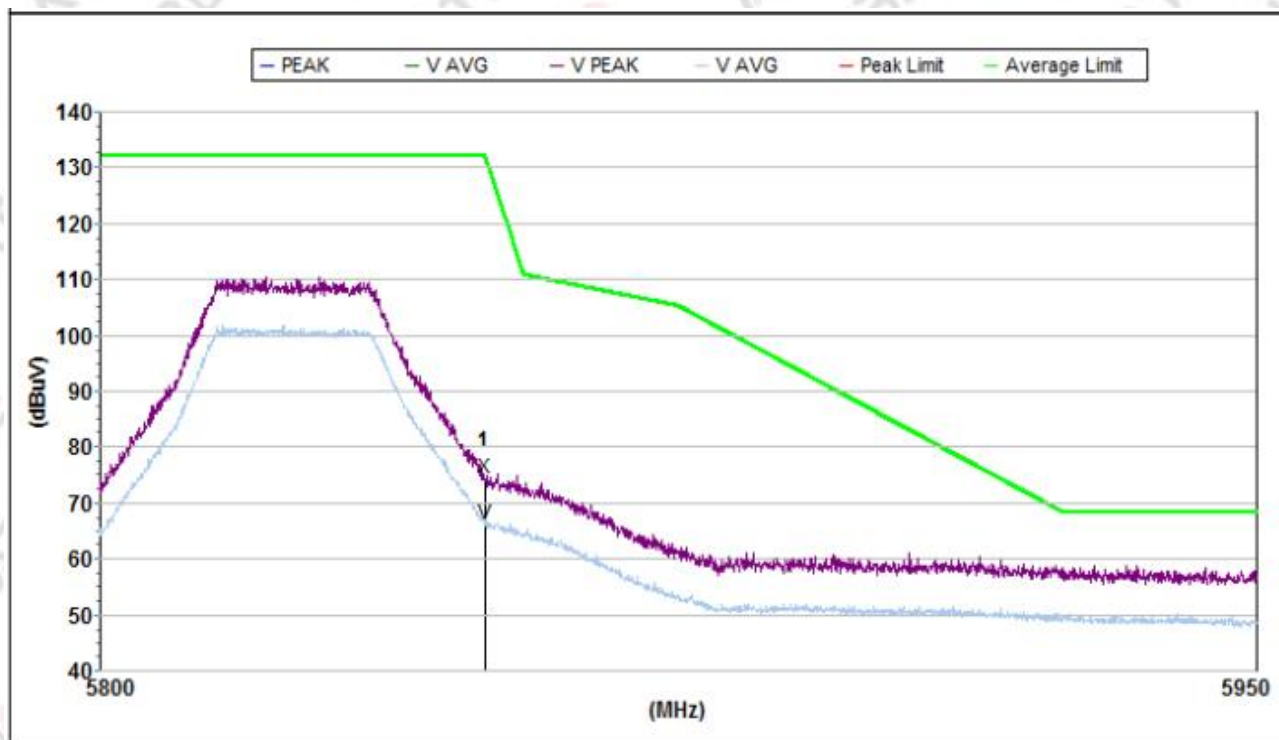


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	5850.000	55.8	18.7	74.5	132.0	57.5	V
Avg							
1	5850.000	47.7	18.7	66.4	132.0	65.6	V

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Horizontal	Mode	802.11ax40-TX Channel 151 MIMO

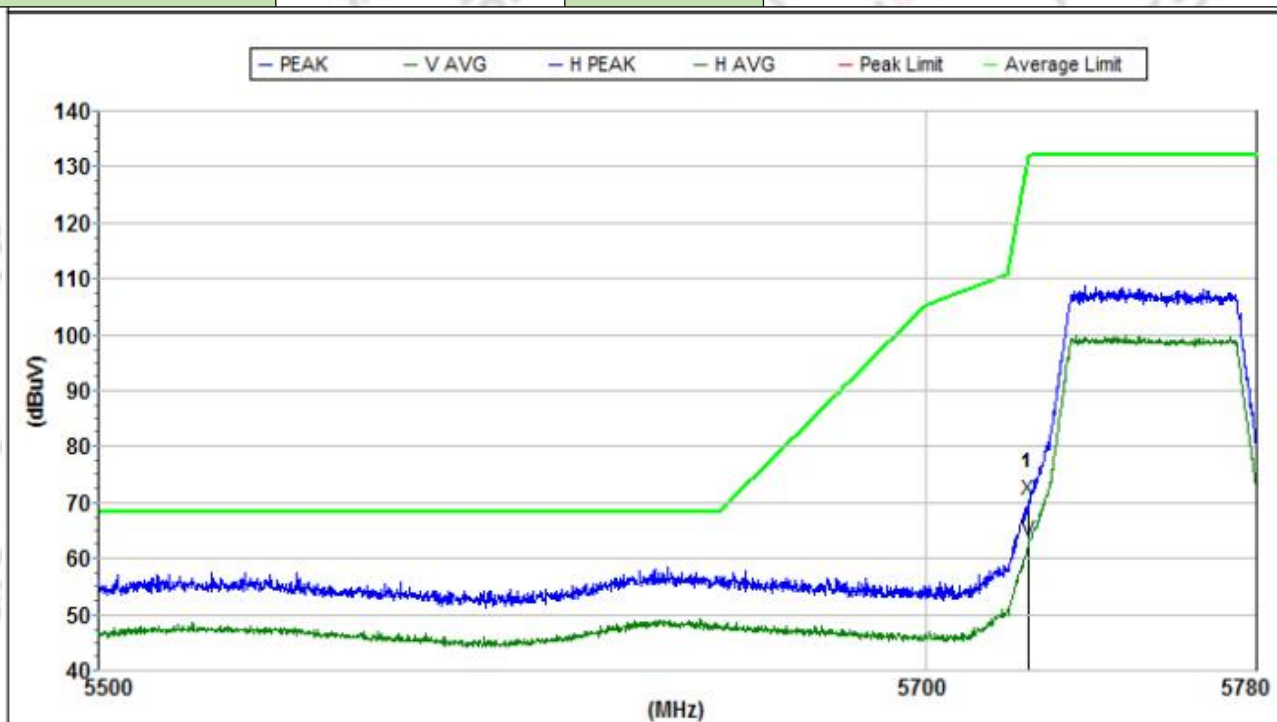


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	5725.000	54.1	16.5	70.6	132.0	61.4	H
Avg							
1	5725.000	46.7	16.5	63.2	132.0	68.8	H

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Vertical	Mode	802.11ax40-TX Channel 151 MIMO

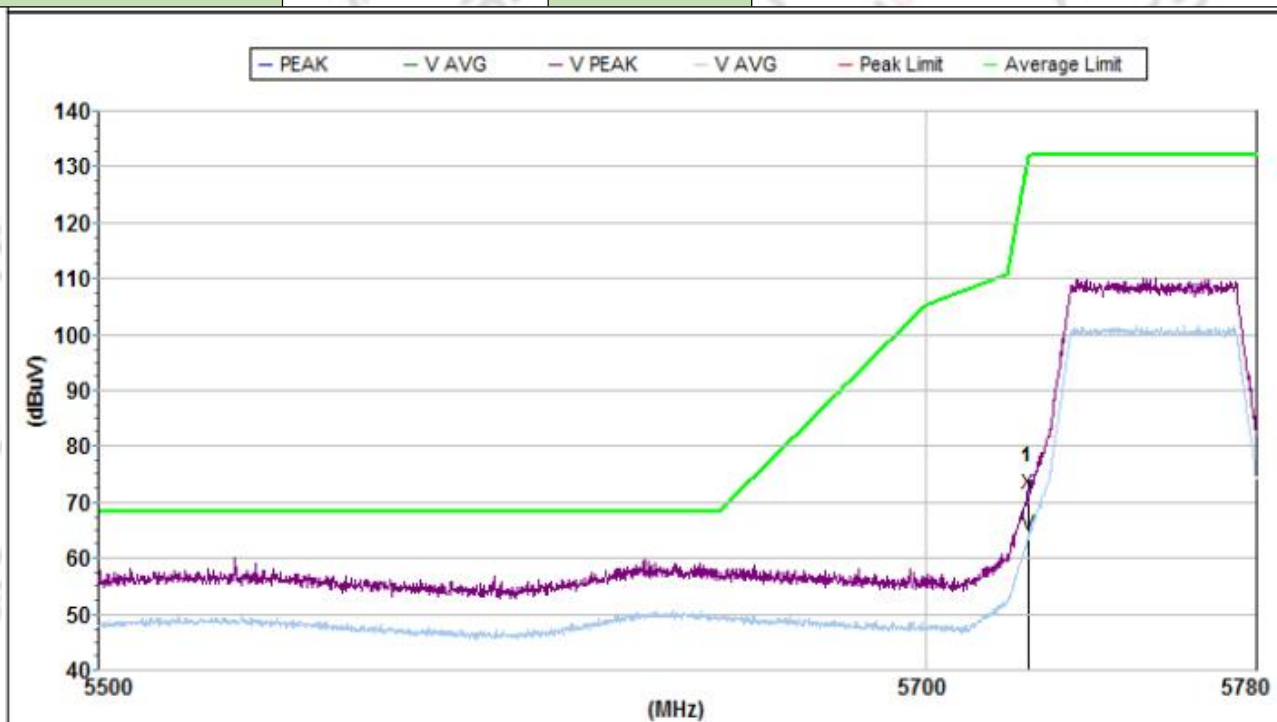


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	5725.000	53.5	18.2	71.7	132.0	60.3	V
Avg							
1	5725.000	46.3	18.2	64.5	132.0	67.5	V

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Horizontal	Mode	802.11ax40-TX Channel 159 MIMO

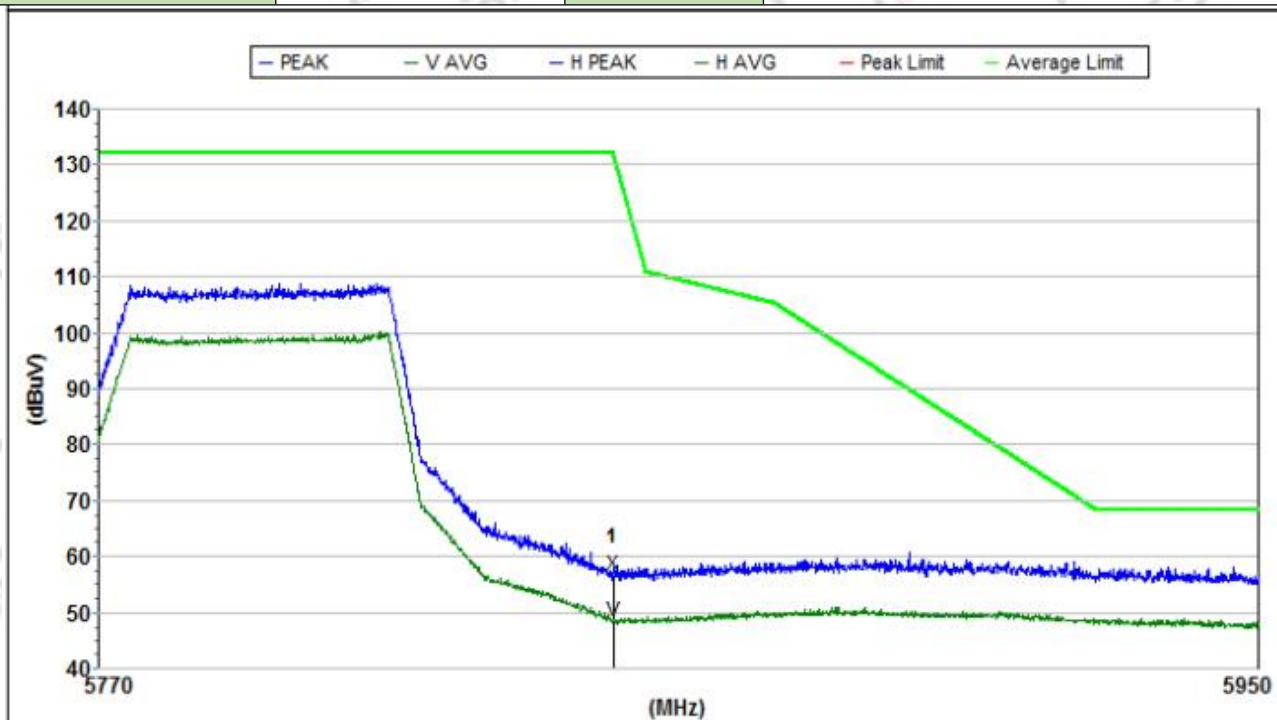


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	5850.000	56.6	0.2	56.8	132.0	75.2	H
Avg							
1	5850.000	48.2	0.2	48.4	132.0	83.6	H

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Vertical	Mode	802.11ax40-TX Channel 159 MIMO

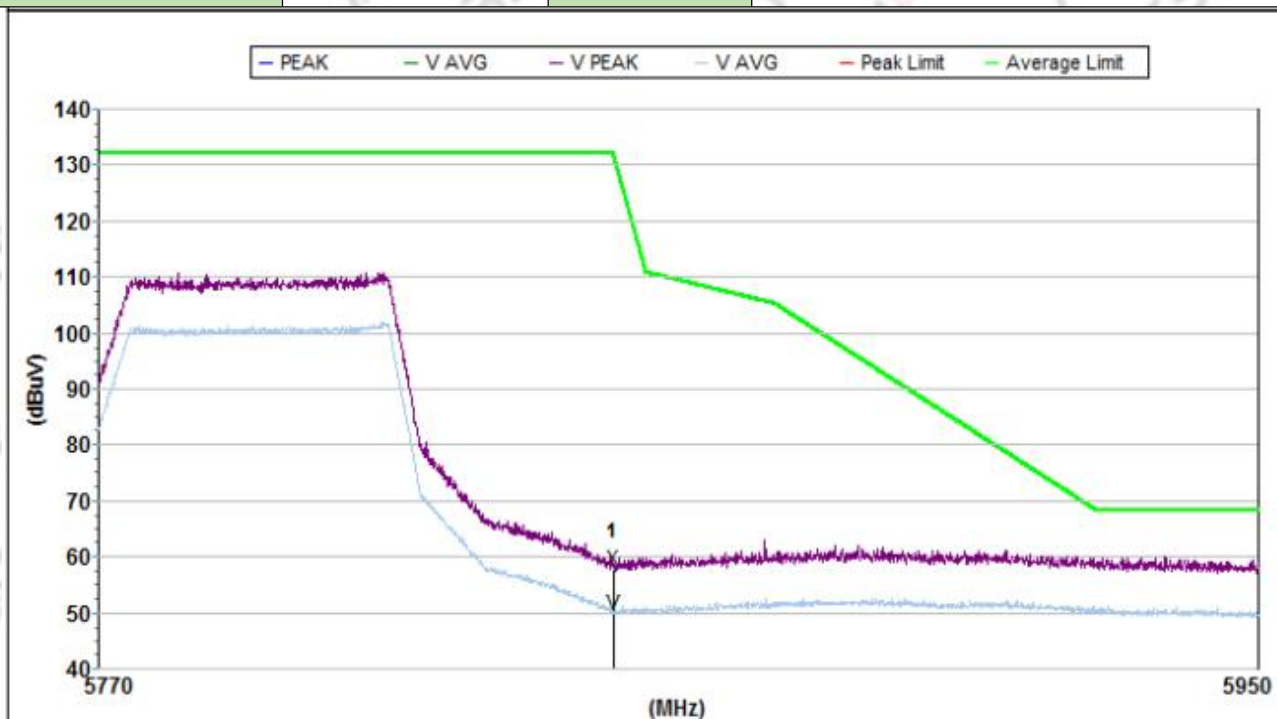


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	5850.000	55.8	2.0	57.8	132.0	74.2	V
Avg							
1	5850.000	48.0	2.0	50.0	132.0	82.0	V

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Horizontal	Mode	802.11ax80-TX Channel 155 MIMO

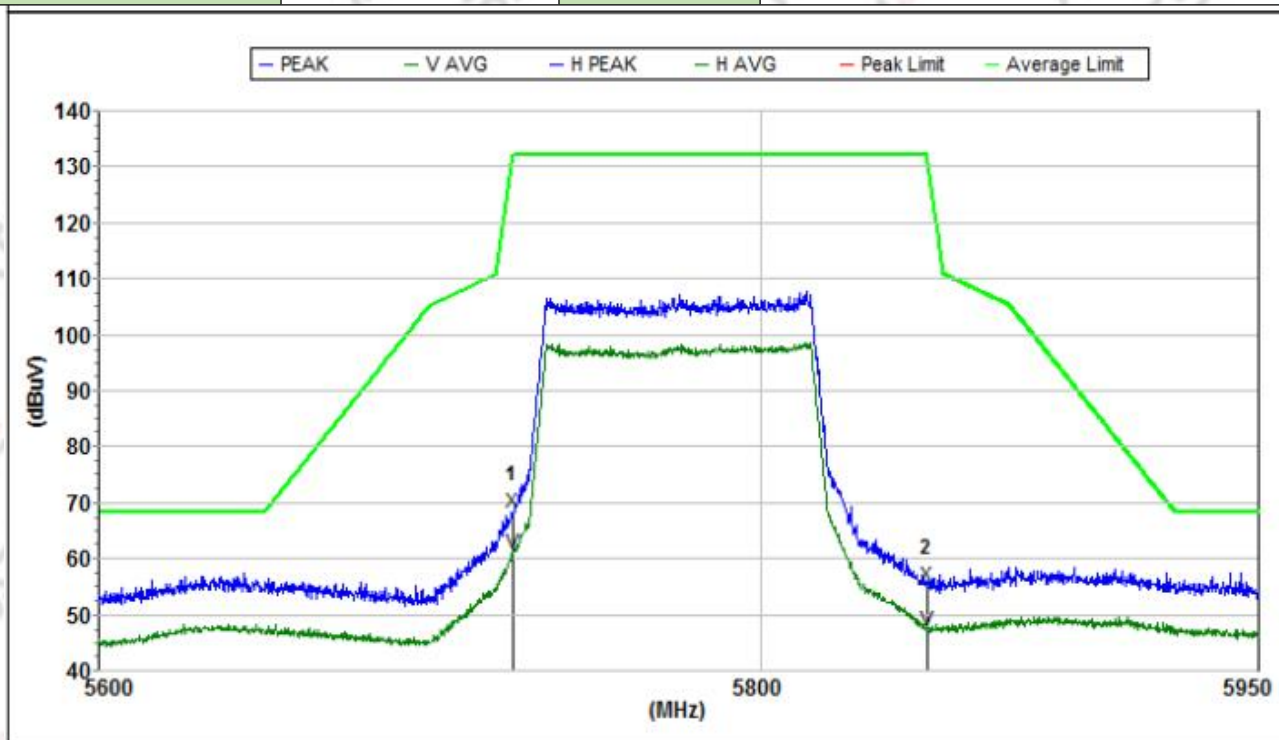

Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	5725.000	53.2	15.2	68.4	132.0	63.6	H
2	5850.000	55.0	0.2	55.2	132.0	76.8	H
Avg							
1	5725.000	45.8	15.2	61.0	132.0	71.0	H
2	5850.000	47.1	0.2	47.3	132.0	84.7	H

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	Vertical	Mode	802.11ax80-TX Channel 155 MIMO

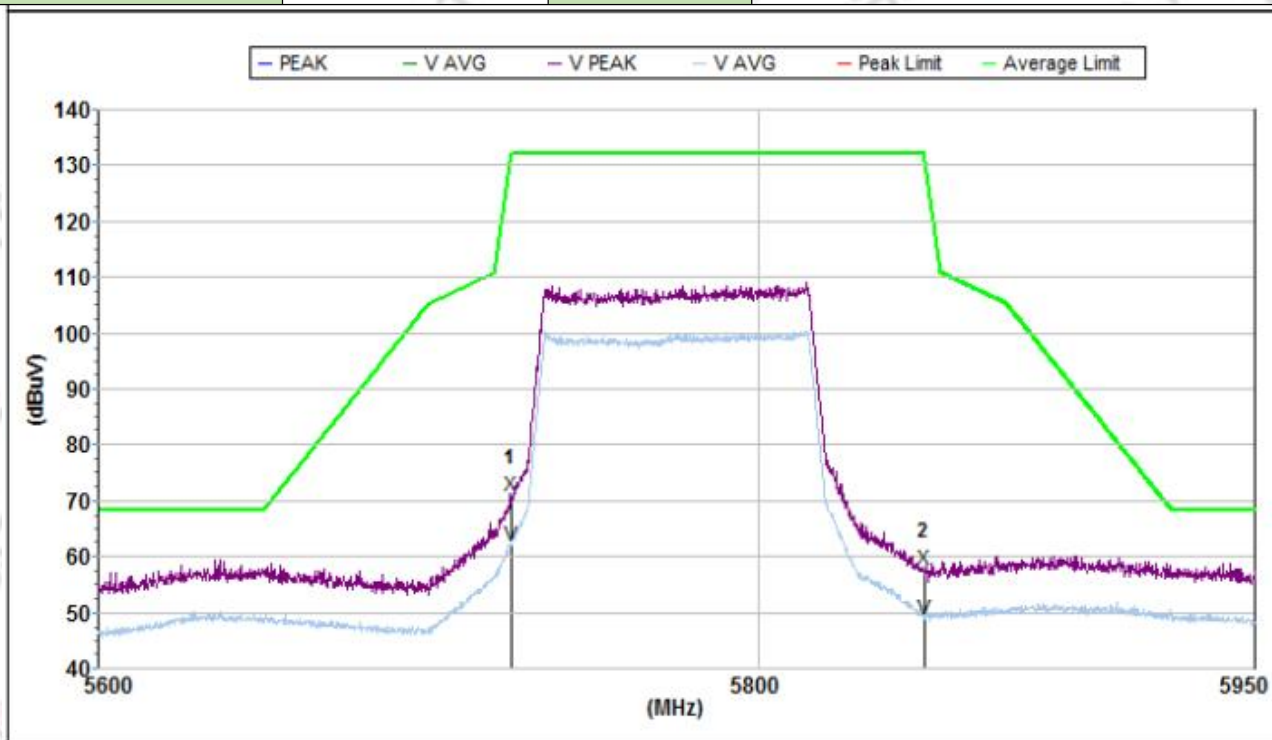


Mk.	Freq.(MHz)	Reading(dBuV/m)	Factor(dB)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Pol.
Peak:							
1	5725.000	53.9	16.9	70.8	132.0	61.2	V
2	5850.000	55.7	2.0	57.7	132.0	74.3	V
Avg							
1	5725.000	45.3	16.9	62.2	132.0	69.8	V
2	5850.000	46.8	2.0	48.8	132.0	83.2	V

2.AC Power-Line Conducted Emission

Note:


- 1.All modes have been tested, only worst mode(MIMO 802.11ax-TX Channel 159) was recorded in the test report.
- 2.Emission Level = Reading Value + Correction Factor .
3. Correction Factor = Insertion loss + Cable loss.
4. The emission levels of other frequencies were less than 20dB margin against the limit.
5. Margin value = Emission level-Limit value.

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	N	Test Mode	802.11ax-TX Channel 159 MIMO

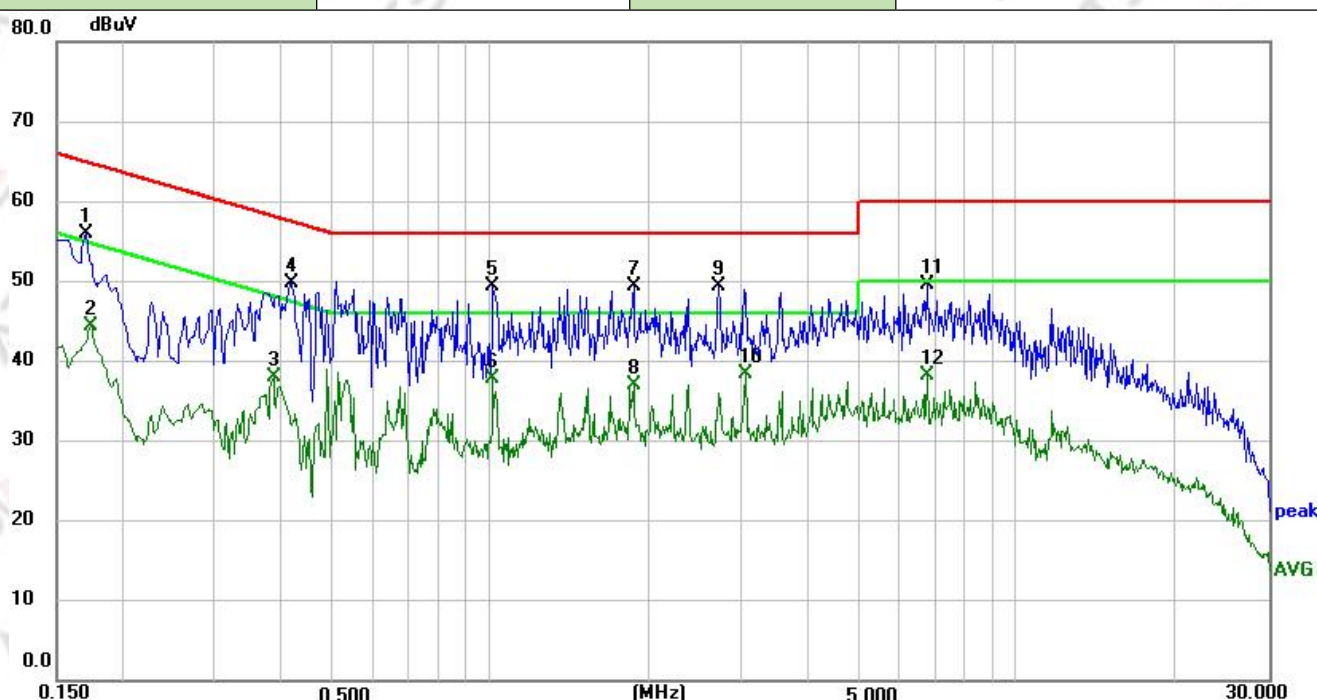

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1700	36.41	19.58	55.99	64.96	-8.97	peak
2	0.1740	24.89	19.59	44.48	54.77	-10.29	AVG
3	0.3860	18.42	19.53	37.95	48.15	-10.20	AVG
4	0.4180	30.23	19.50	49.73	57.49	-7.76	peak
5	1.0140	29.75	19.56	49.31	56.00	-6.69	peak
6	1.0140	18.30	19.56	37.86	46.00	-8.14	AVG
7	1.8700	29.75	19.57	49.32	56.00	-6.68	peak
8	1.8700	17.49	19.57	37.06	46.00	-8.94	AVG
9 *	2.7180	29.89	19.58	49.47	56.00	-6.53	peak
10	3.0540	18.84	19.58	38.42	46.00	-7.58	AVG
11	6.7340	30.01	19.51	49.52	60.00	-10.48	peak
12	6.7340	18.75	19.51	38.26	50.00	-11.74	AVG

EUT	Obook Laptop	Model Name	ORICO-H1-15-680-12256-SV
Polarization	L1	Test Mode	802.11ax-TX Channel 159 MIMO

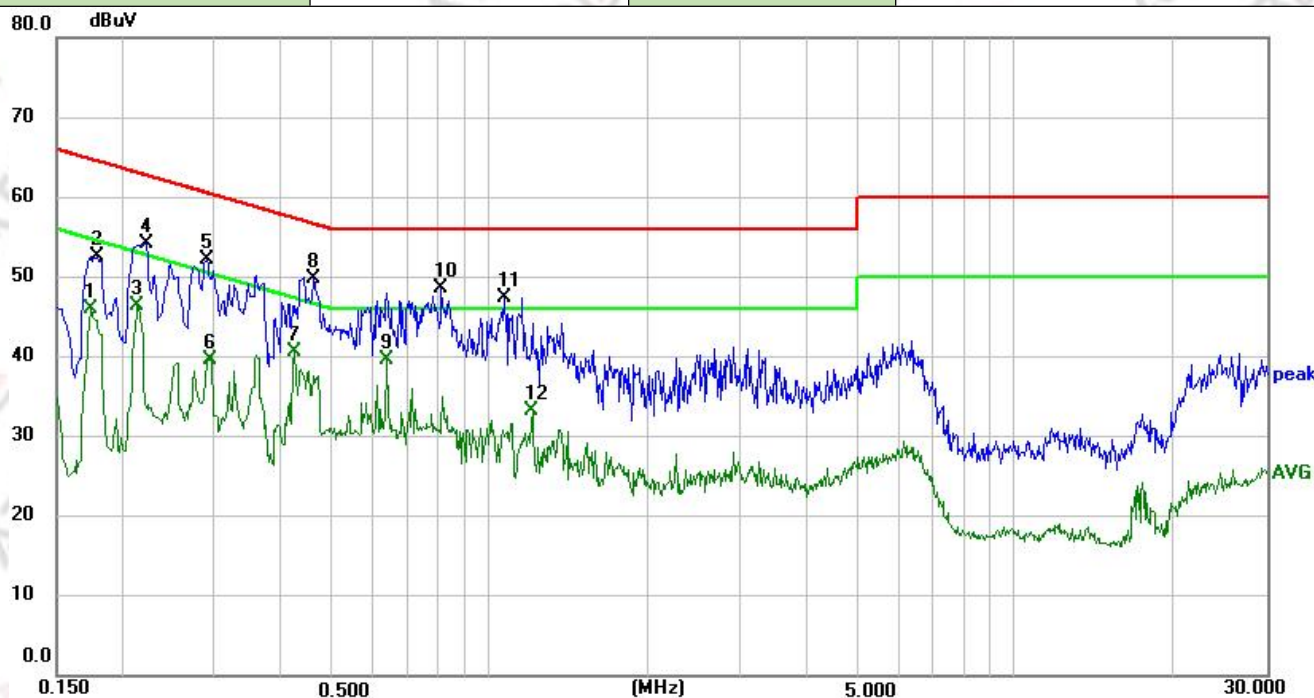

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1740	26.42	19.59	46.01	54.77	-8.76	AVG
2	0.1796	32.92	19.59	52.51	64.50	-11.99	peak
3	0.2140	26.86	19.61	46.47	53.05	-6.58	AVG
4	0.2220	34.59	19.61	54.20	62.74	-8.54	peak
5	0.2893	32.59	19.59	52.18	60.54	-8.36	peak
6	0.2940	19.94	19.60	39.54	50.41	-10.87	AVG
7	0.4260	21.04	19.50	40.54	47.33	-6.79	AVG
8	0.4620	30.33	19.48	49.81	56.66	-6.85	peak
9 *	0.6380	20.21	19.38	39.59	46.00	-6.41	AVG
10	0.8100	29.20	19.42	48.62	56.00	-7.38	peak
11	1.0660	27.82	19.57	47.39	56.00	-8.61	peak
12	1.2059	13.59	19.58	33.17	46.00	-12.83	AVG

*****END*****