


Inverted F Antenna Specification

Summary

ITEM	ANT SPEC					
Model Name	2.4G ANT					
Center Frequency	Horizontal			Vertical		
	2400MHz	2450MHz	2500MHz	2400MHz	2450MHz	2500MHz
	-1.27	-0.92	-0.58	-5.22	-2.54	-1.18
MAX. Gain	-0.58dBi					
Polarization	Horizontal and Vertical					
Azimuth Beam Pattern	Omni-directional					
Impedance	50 Ohm					
Antenna Length	38.20mm					
Antenna Manufacture	Shenzhen JLC Technology Group Co., Ltd.					

Antenna Photo & Length (mm)

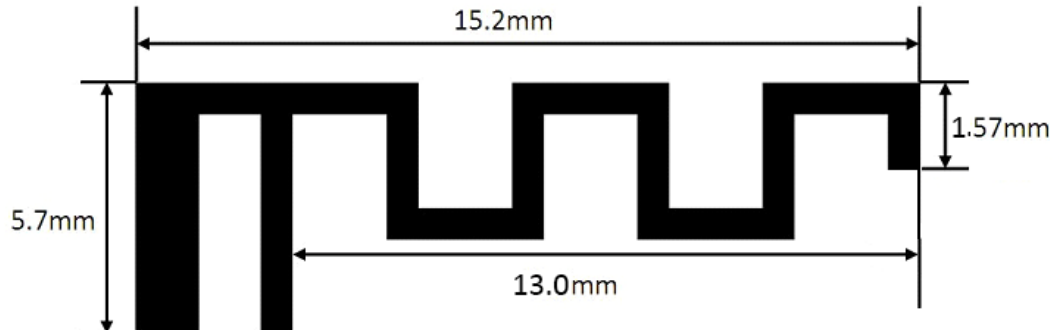

Horizontal: 2400 MHz 2450 MHz 2500 MHz

Gain (dBi)

Max: 0 Min: -40 Scale: 5/div



Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	-1.2702	-31.2471	-7.1594
2450	-0.9161	-37.5312	-7.2294
2500	-0.5812	-22.0781	-6.3841

Vertical: 2400 MHz 2450 MHz 2500 MHz

Gain (dBi)

Max: 0 Min: -30 Scale: 5/div



Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	-5.2186	-25.1531	-13.4294
2450	-2.5407	-23.5789	-17.4351
2500	-1.1831	-28.6630	-9.2340

ANT Test Labs: Attestation of Global Compliance Co., Ltd.