RF Test Data for 2.4G WiFi (Conducted Measurements)

General Description of EUT	
Product Name:	**AIR PURIFIER**
Test Model:	**AZ5100VC**
Sample ID:	**HC-C-202503-0229-01-02#**
Environmental Conditions	
Temperature:	**25℃**
Relative Humidity:	**55%**
Test Voltage:	**AC 120V/60Hz**
Test Engineer:	**Gold Zhang**
Note: For a more detailed features description, please refer to the report TBR-C-202503-0229-21 The report only show the worst case data.	

Contents

1.Duty Cycle....3
2.Maximum Conducted Output Power....9
3.-6dB Bandwidth....10
4.Occupied Channel Bandwidth....16
5.Maximum Power Spectral Density Level....22
6.Band Edge....28
7.Conducted RF Spurious Emission....35
8.Restrict Band....45

1.Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	98.96	0.05	0.08
NVNT	b	2437	Ant1	98.96	0.05	0.08
NVNT	b	2462	Ant1	98.96	0.05	0.08
NVNT	g	2412	Ant1	94.09	0.26	0.48
NVNT	g	2437	Ant1	94.09	0.26	0.48
NVNT	g	2462	Ant1	94.09	0.26	0.48
NVNT	n(HT20)	2412	Ant1	93.66	0.28	0.52
NVNT	n(HT20)	2437	Ant1	93.66	0.28	0.52
NVNT	n(HT20)	2462	Ant1	93.66	0.28	0.52

Test Graphs

Duty Cycle NVNT b 2412MHz Ant1

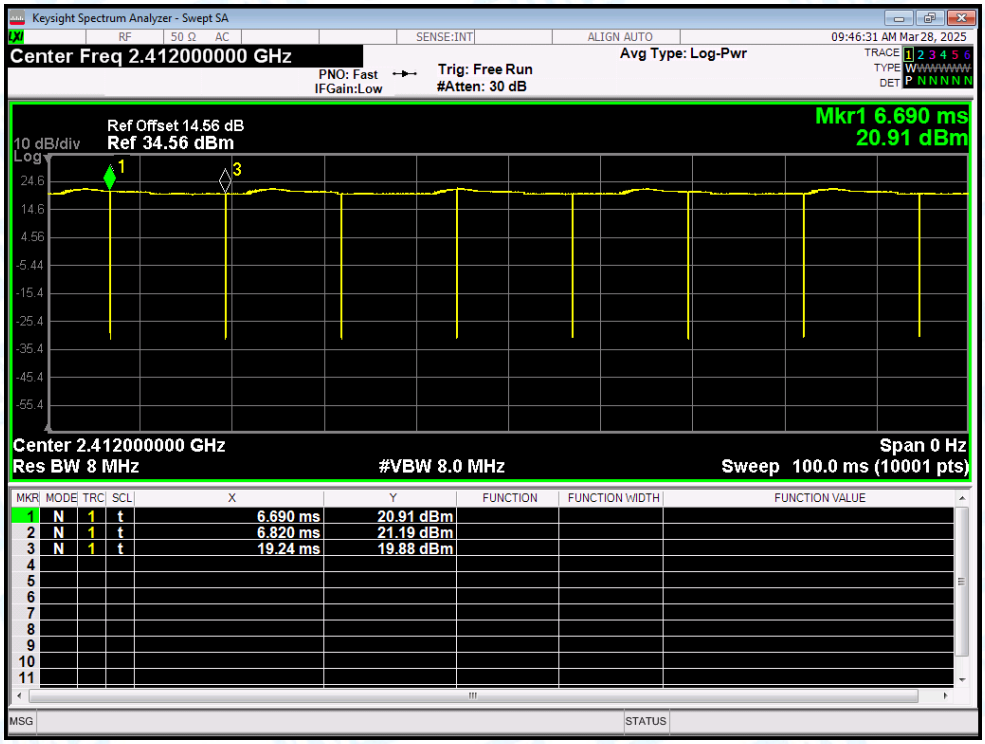

Duty Cycle NVNT b 2437MHz Ant1

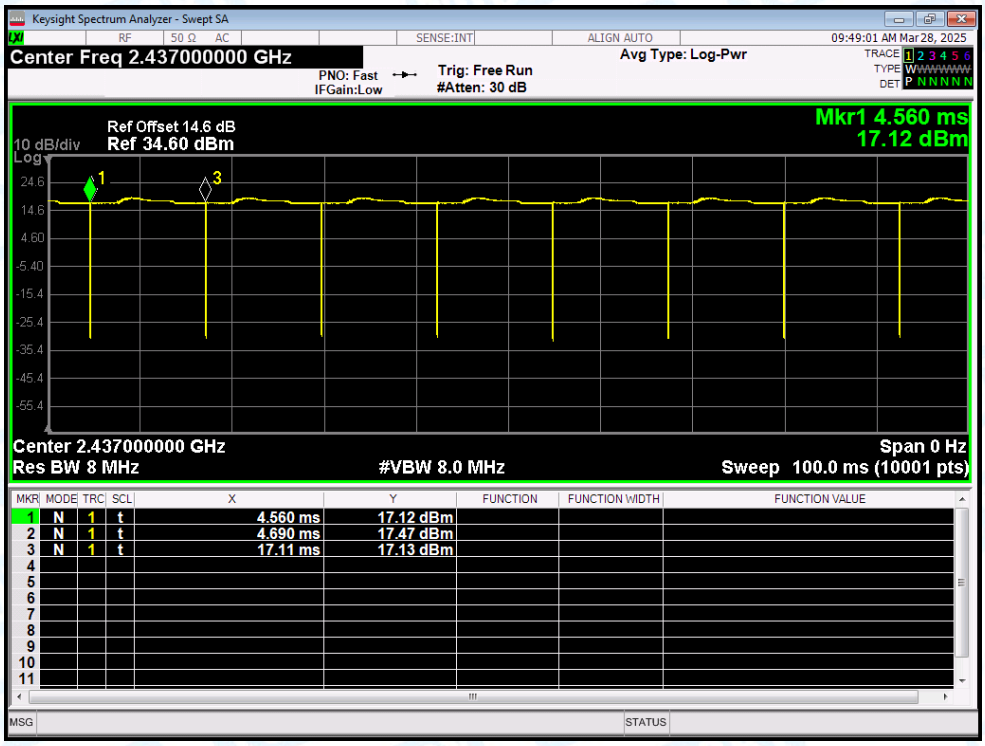

Duty Cycle NVNT b 2462MHz Ant1

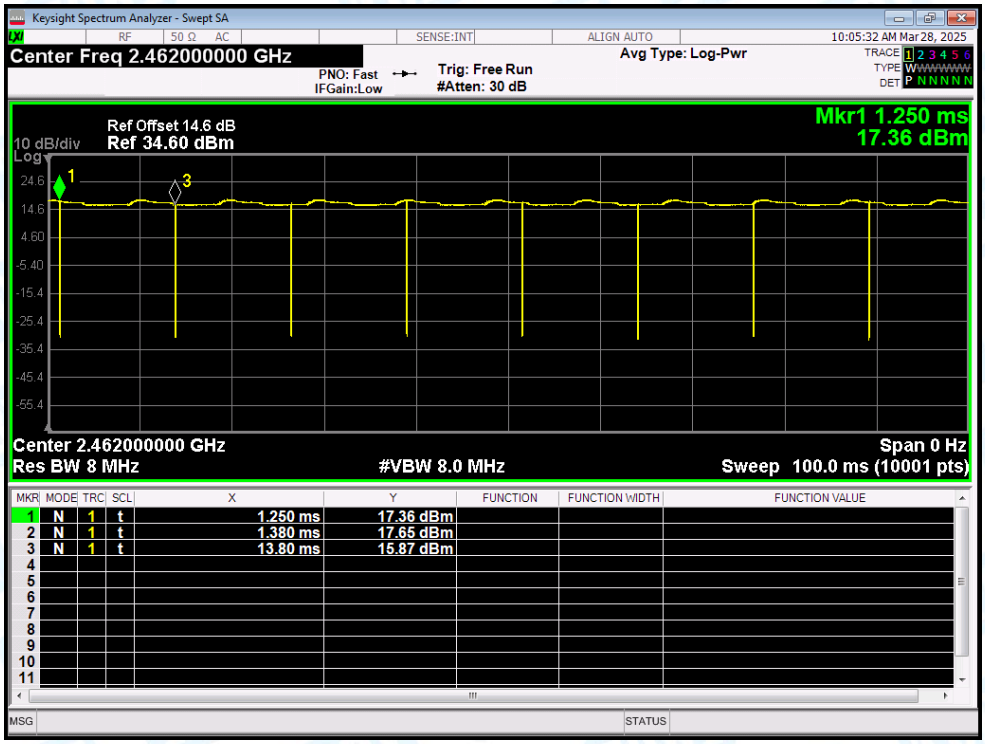

Duty Cycle NVNT g 2412MHz Ant1

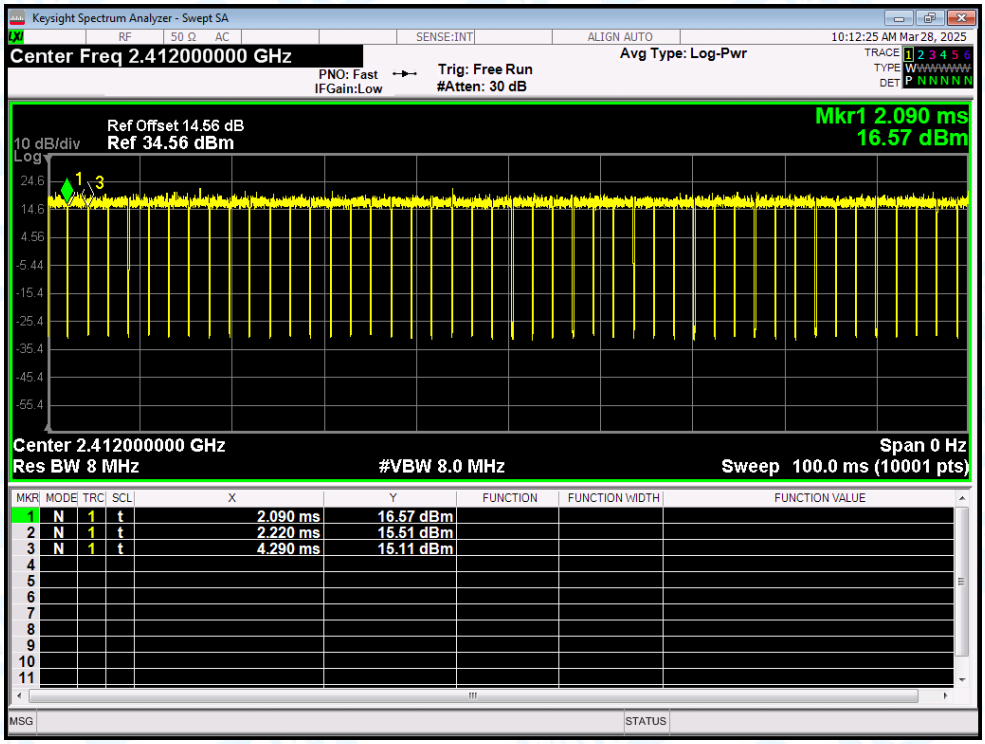

Duty Cycle NVNT g 2437MHz Ant1

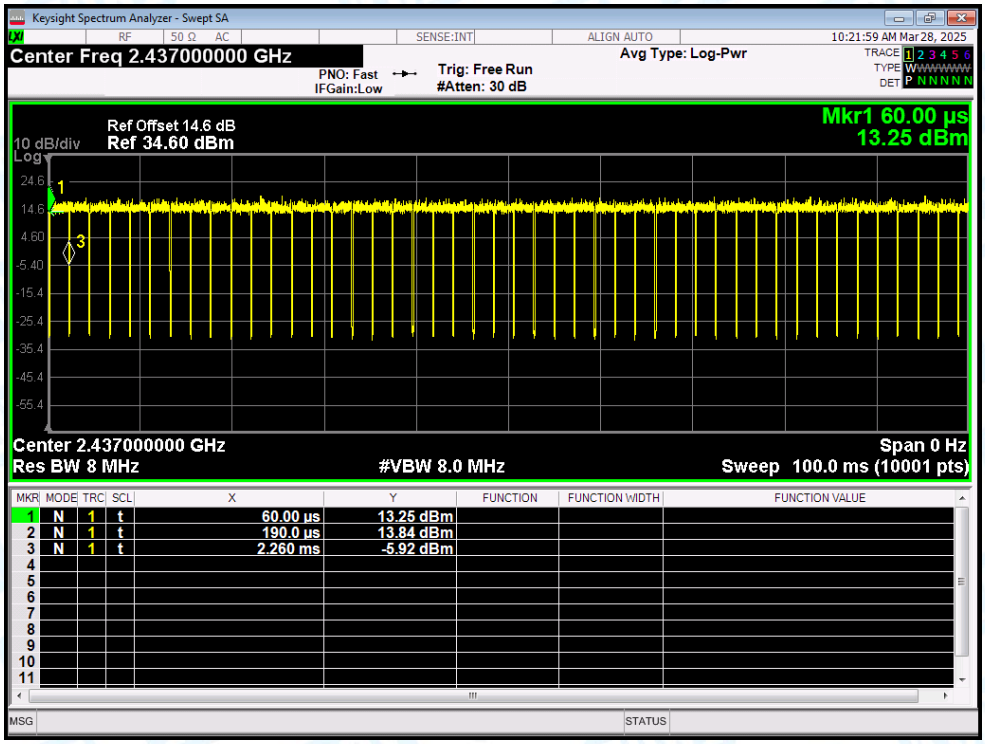

Duty Cycle NVNT g 2462MHz Ant1

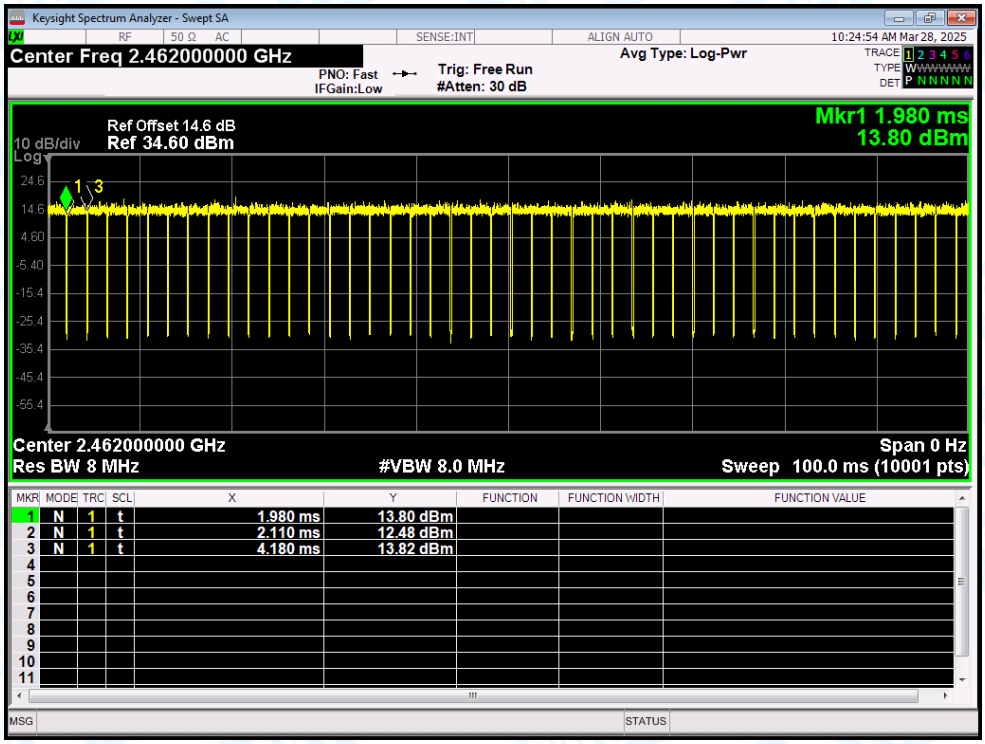

Duty Cycle NVNT n(HT20) 2412MHz Ant1

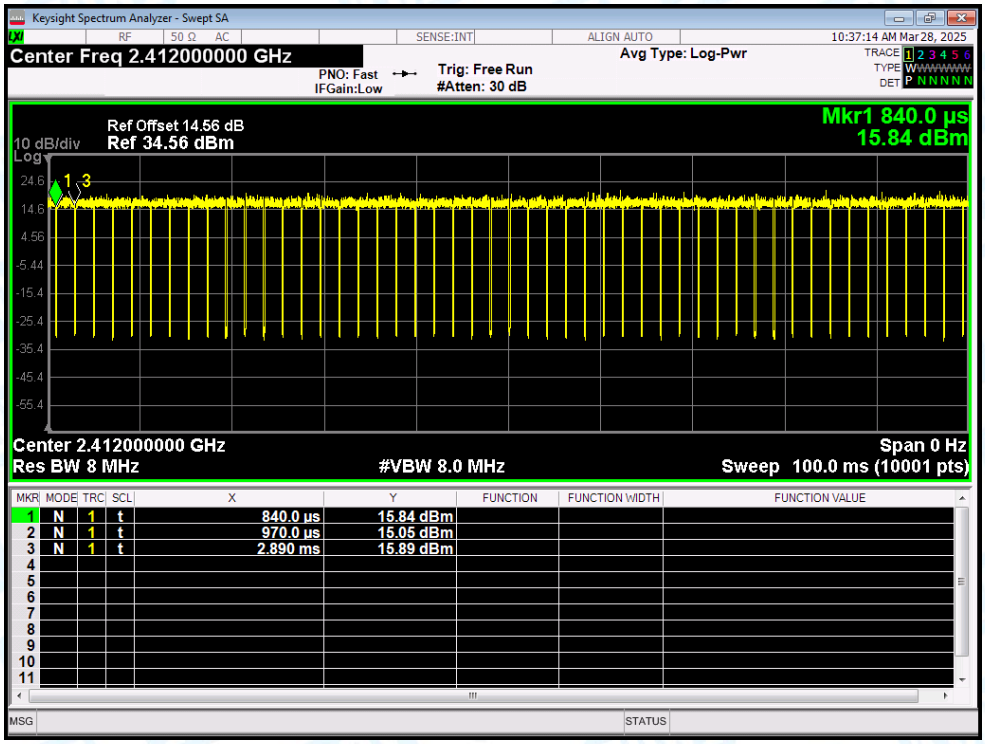

Duty Cycle NVNT n(HT20) 2437MHz Ant1

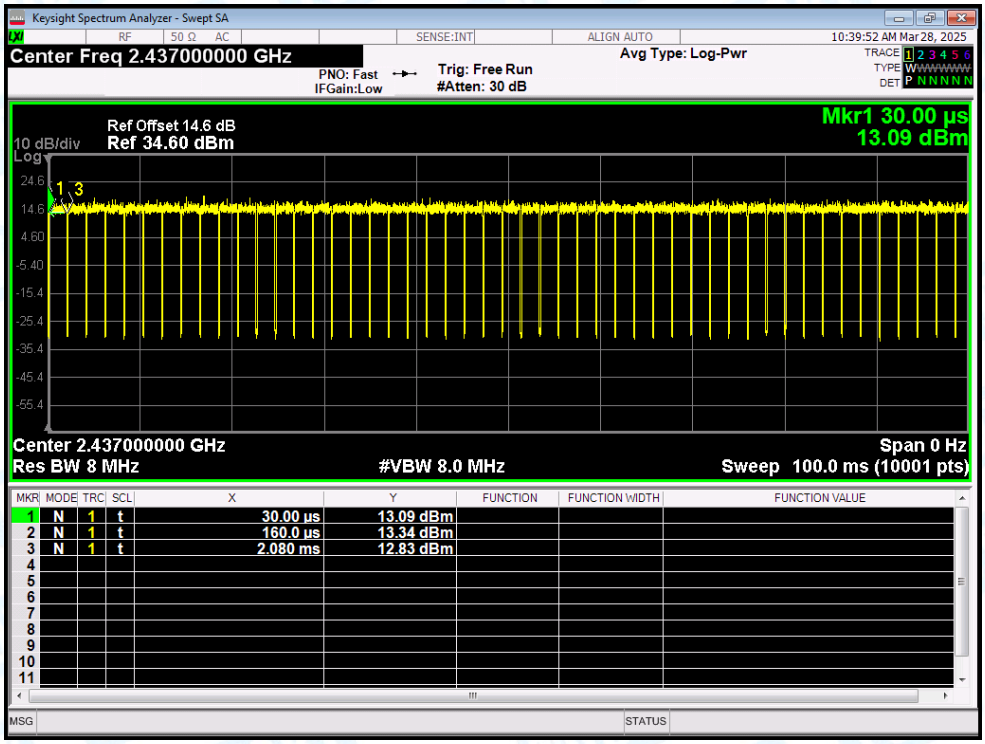

Duty Cycle NVNT n(HT20) 2462MHz Ant1

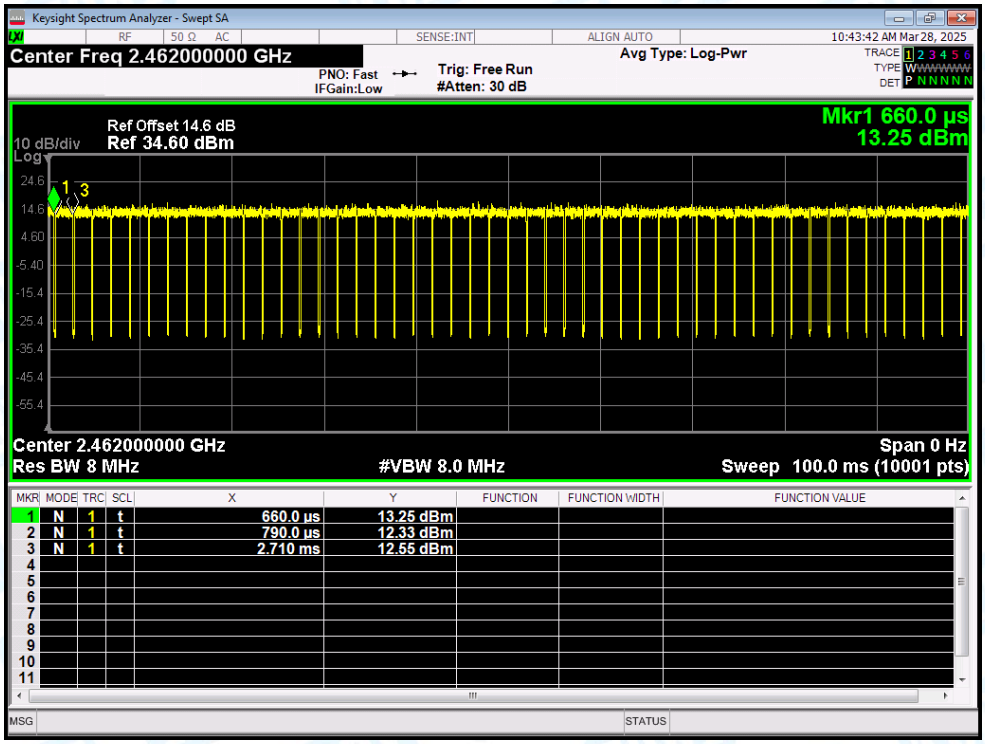

2.Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	16.11	30	Pass
NVNT	b	2437	Ant1	13.39	30	Pass
NVNT	b	2462	Ant1	12.75	30	Pass
NVNT	g	2412	Ant1	13.51	30	Pass
NVNT	g	2437	Ant1	11.16	30	Pass
NVNT	g	2462	Ant1	9.76	30	Pass
NVNT	n(HT20)	2412	Ant1	12.82	30	Pass
NVNT	n(HT20)	2437	Ant1	10.77	30	Pass
NVNT	n(HT20)	2462	Ant1	9.08	30	Pass

Note: The duty factor has been compensated into the result.

3.-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	8.53	0.5	Pass
NVNT	b	2437	Ant1	9.08	0.5	Pass
NVNT	b	2462	Ant1	9.02	0.5	Pass
NVNT	g	2412	Ant1	16.33	0.5	Pass
NVNT	g	2437	Ant1	16.32	0.5	Pass
NVNT	g	2462	Ant1	16.32	0.5	Pass
NVNT	n(HT20)	2412	Ant1	17.63	0.5	Pass
NVNT	n(HT20)	2437	Ant1	17.19	0.5	Pass
NVNT	n(HT20)	2462	Ant1	17.58	0.5	Pass

Test Graphs

-6dB Bandwidth NVNT b 2412MHz Ant1

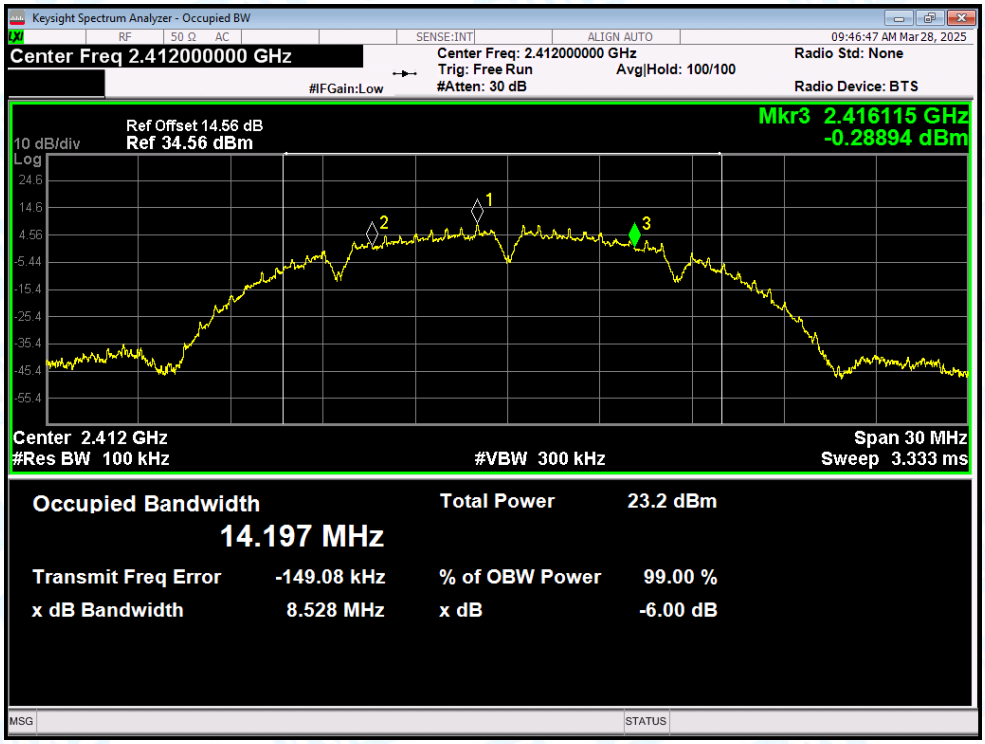

-6dB Bandwidth NVNT b 2437MHz Ant1

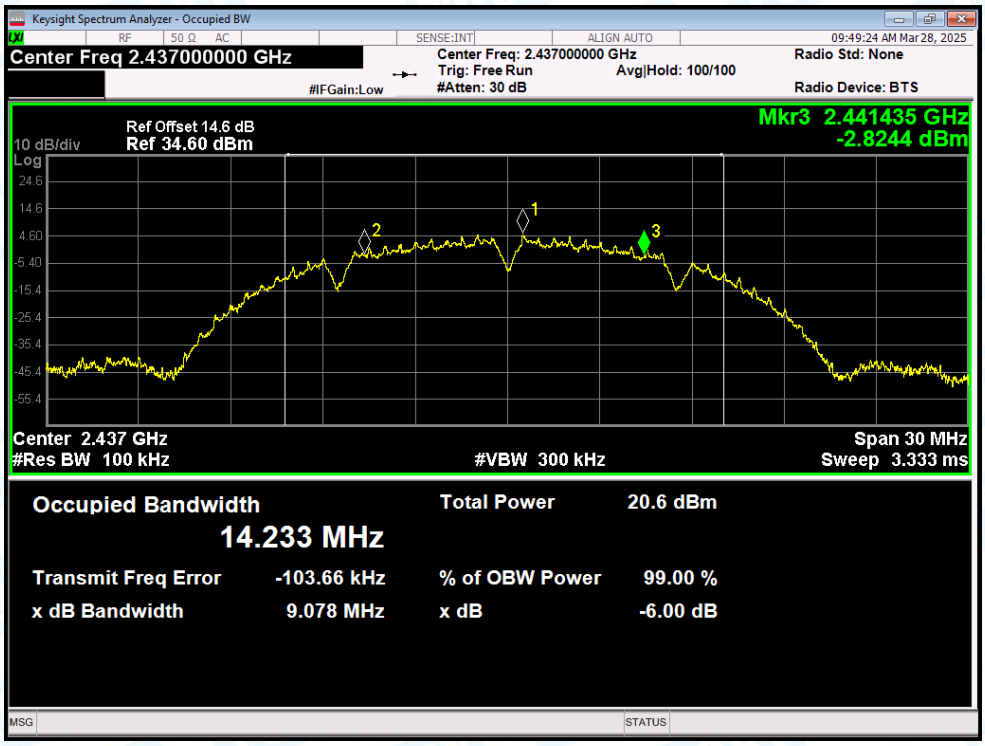

-6dB Bandwidth NVNT b 2462MHz Ant1

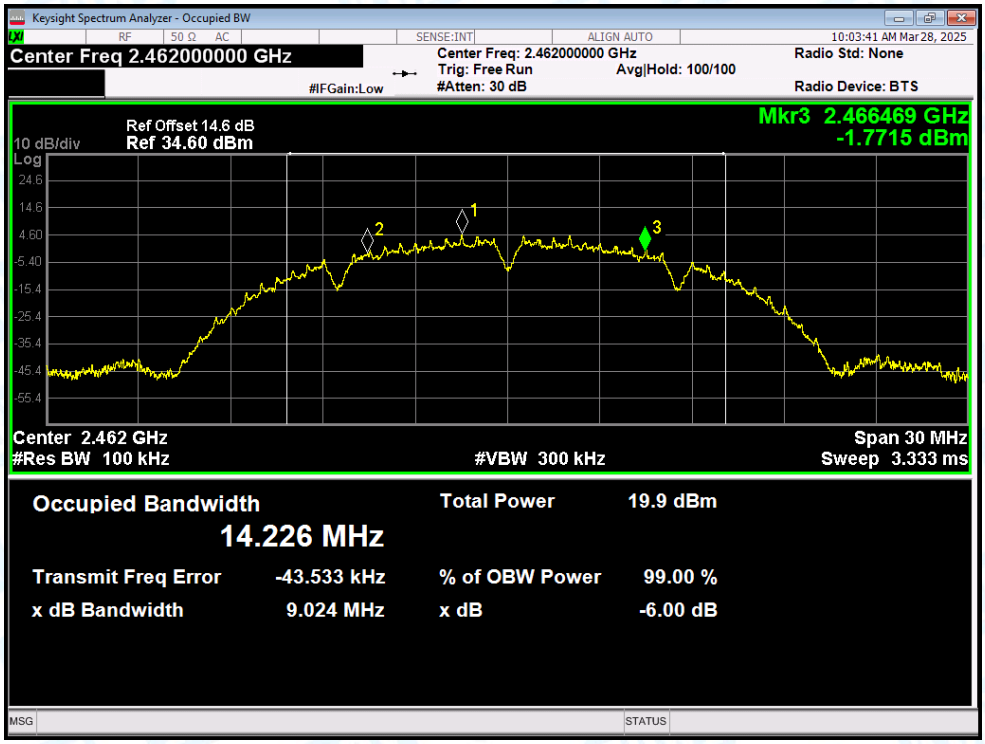

-6dB Bandwidth NVNT g 2412MHz Ant1

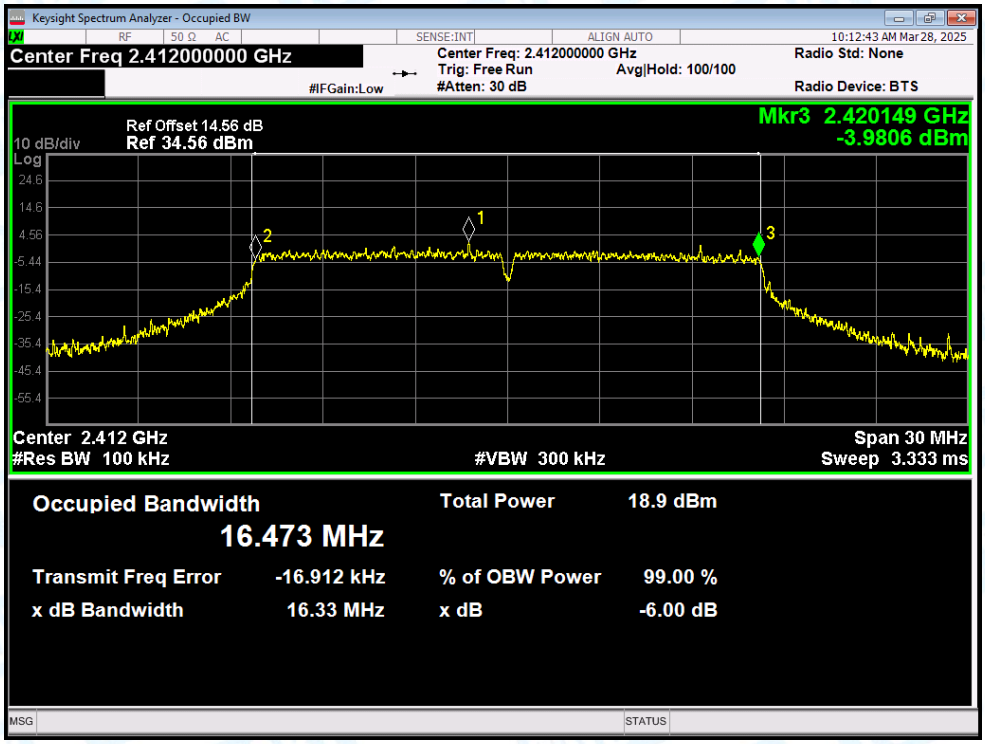

-6dB Bandwidth NVNT g 2437MHz Ant1

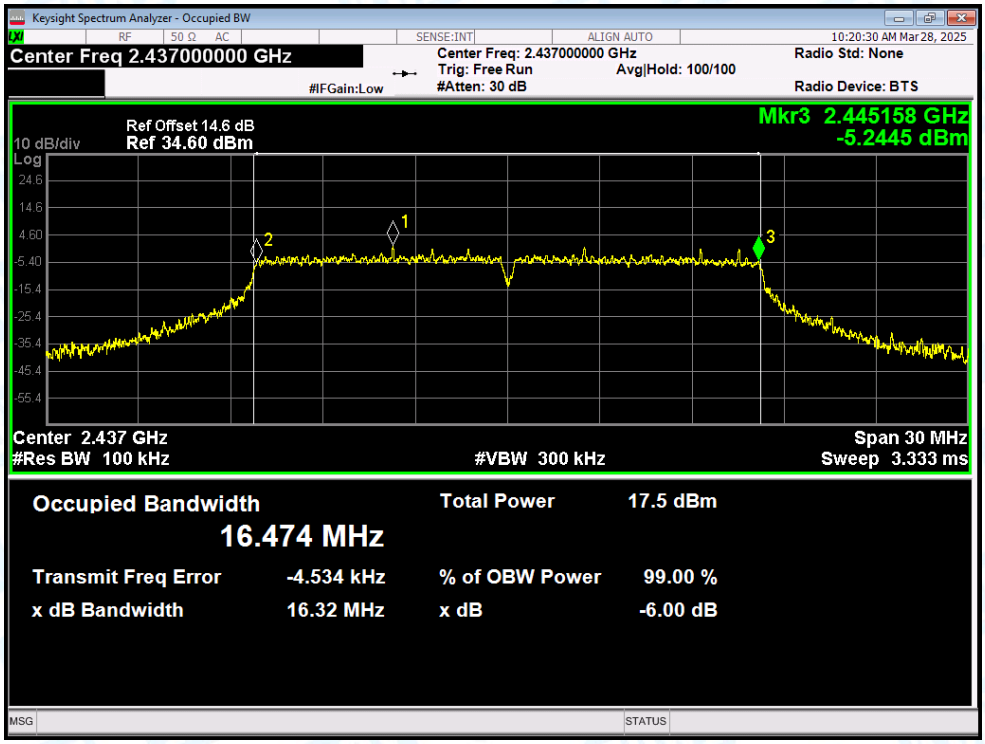

-6dB Bandwidth NVNT g 2462MHz Ant1

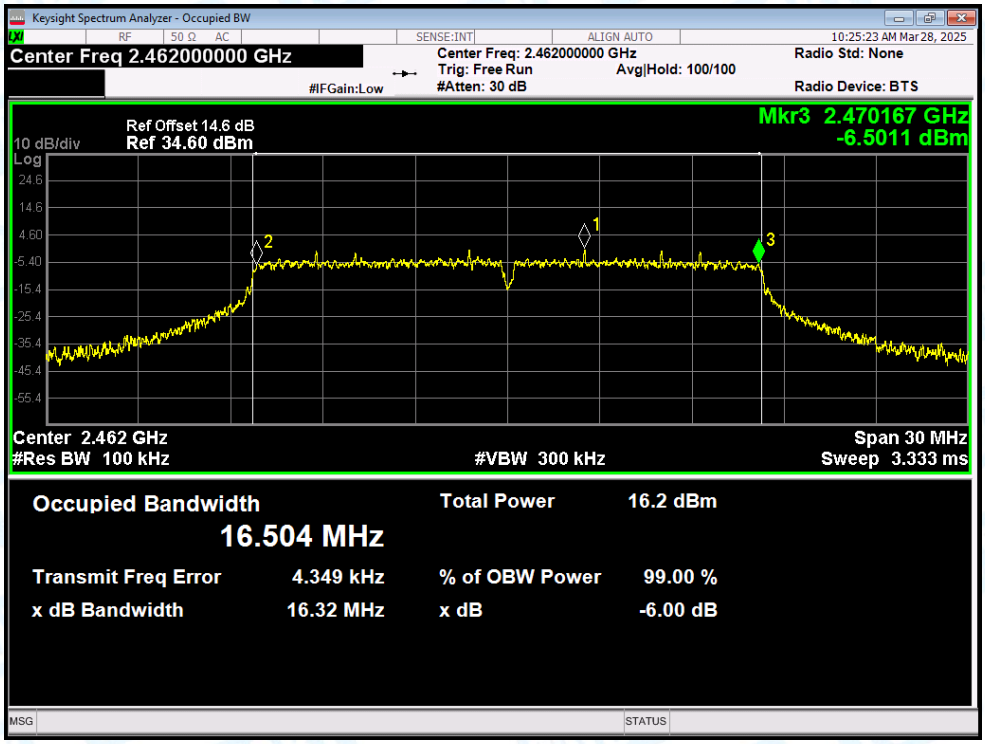

-6dB Bandwidth NVNT n(HT20) 2412MHz Ant1

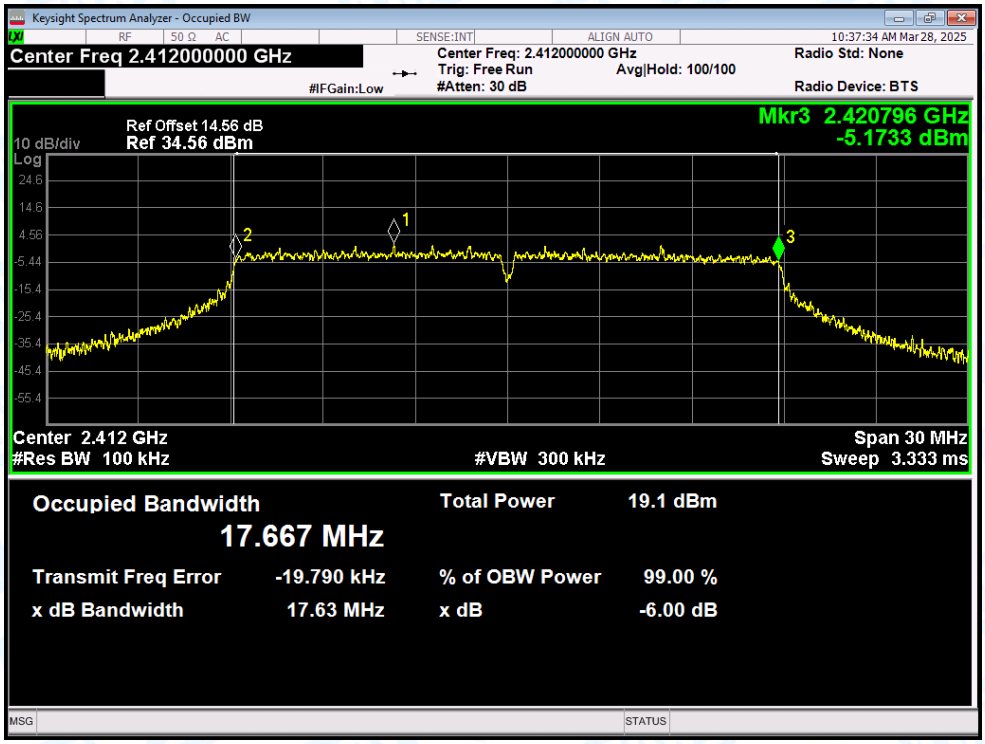

-6dB Bandwidth NVNT n(HT20) 2437MHz Ant1

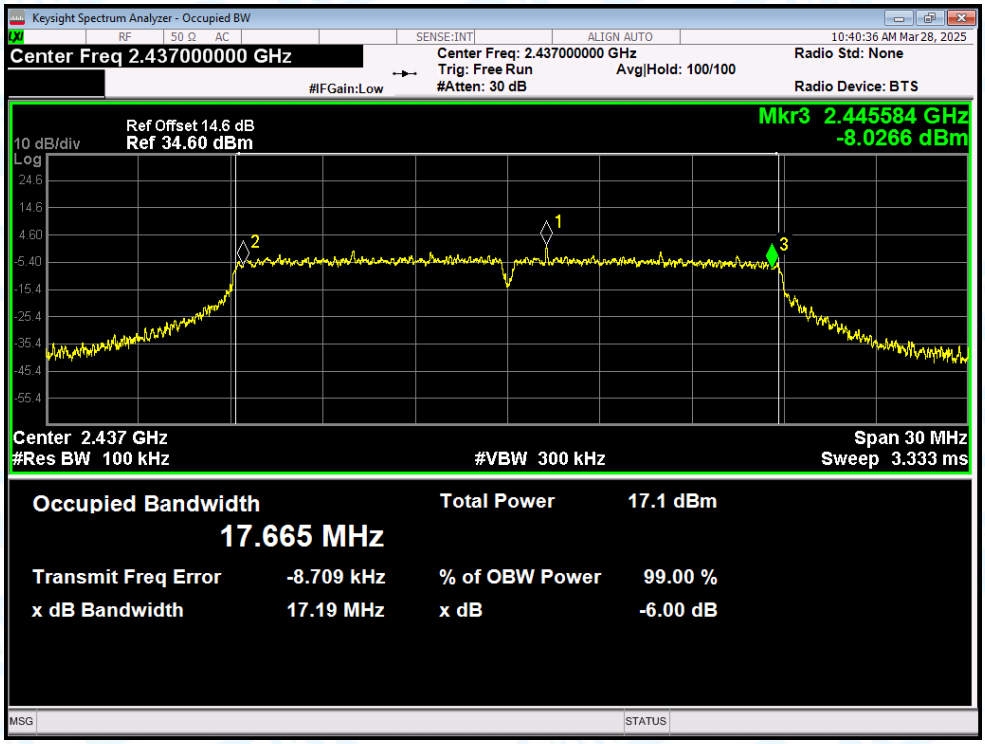

-6dB Bandwidth NVNT n(HT20) 2462MHz Ant1

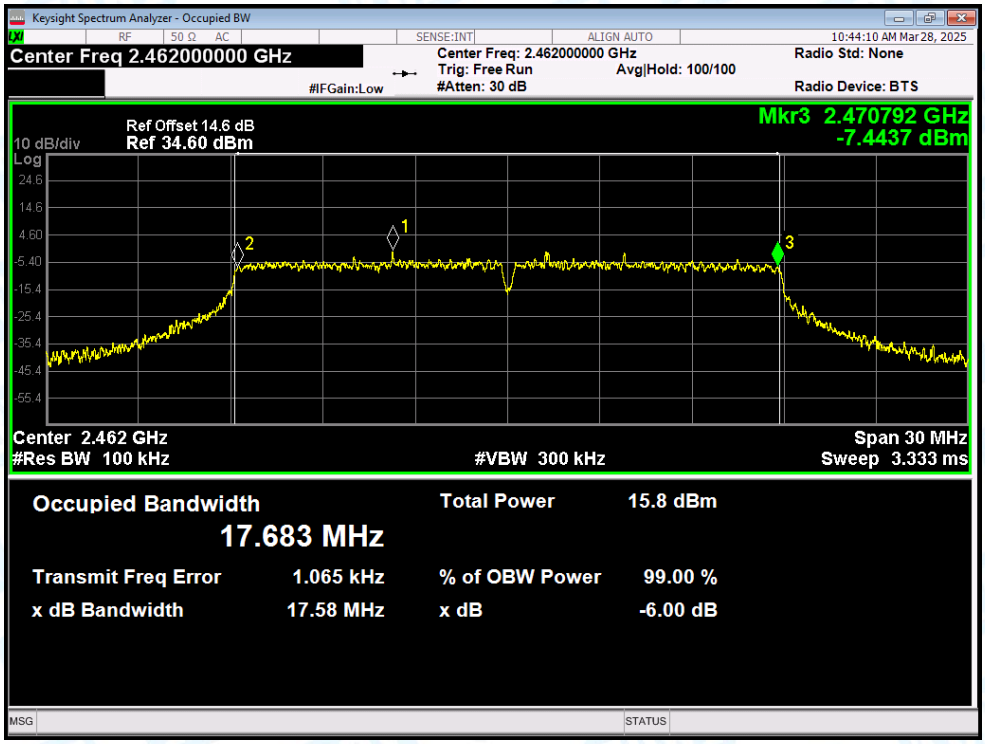

4.Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	14.237
NVNT	b	2437	Ant1	14.229
NVNT	b	2462	Ant1	14.177
NVNT	g	2412	Ant1	16.635
NVNT	g	2437	Ant1	16.64
NVNT	g	2462	Ant1	16.62
NVNT	n(HT20)	2412	Ant1	17.753
NVNT	n(HT20)	2437	Ant1	17.774
NVNT	n(HT20)	2462	Ant1	17.788

Test Graphs

OBW NVNT b 2412MHz Ant1

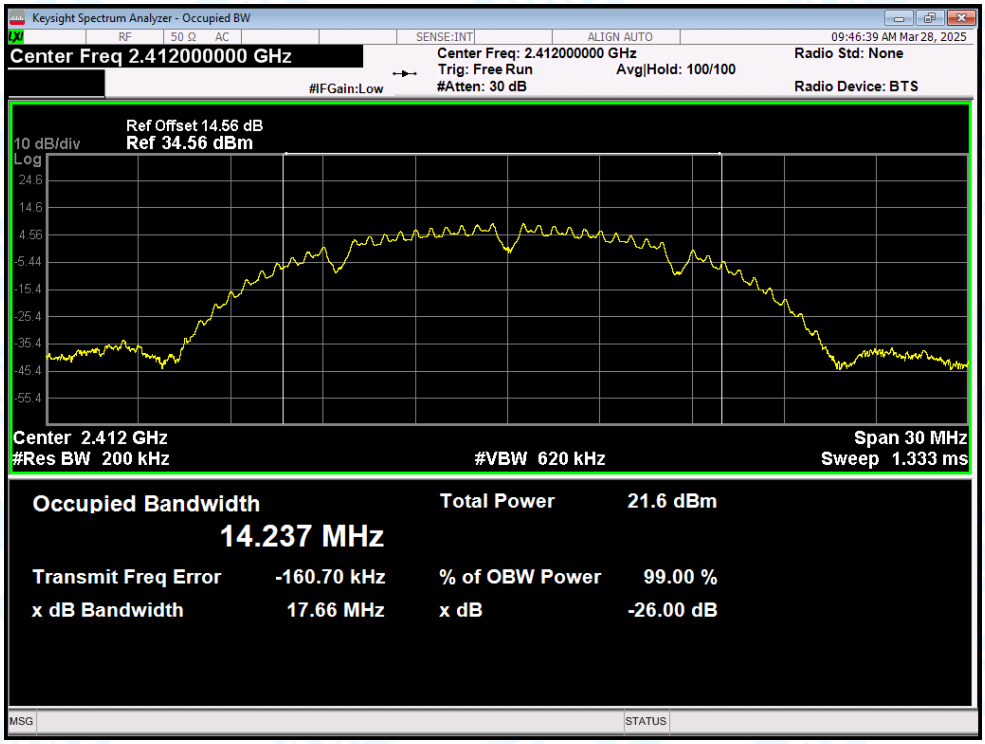

OBW NVNT b 2437MHz Ant1

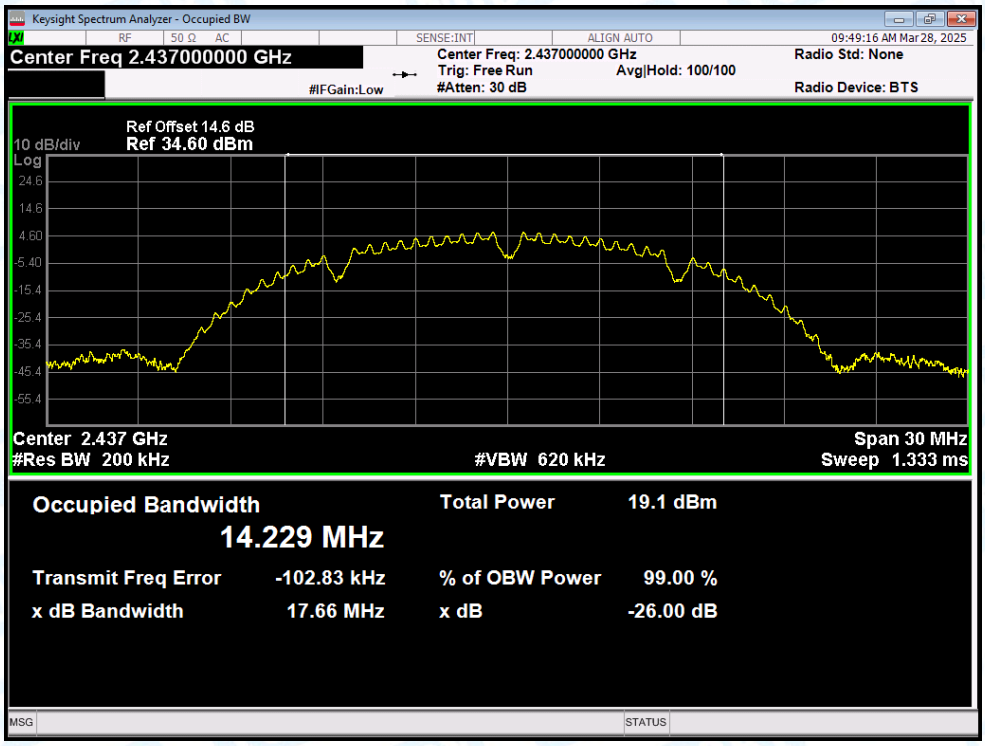

OBW NVNT b 2462MHz Ant1

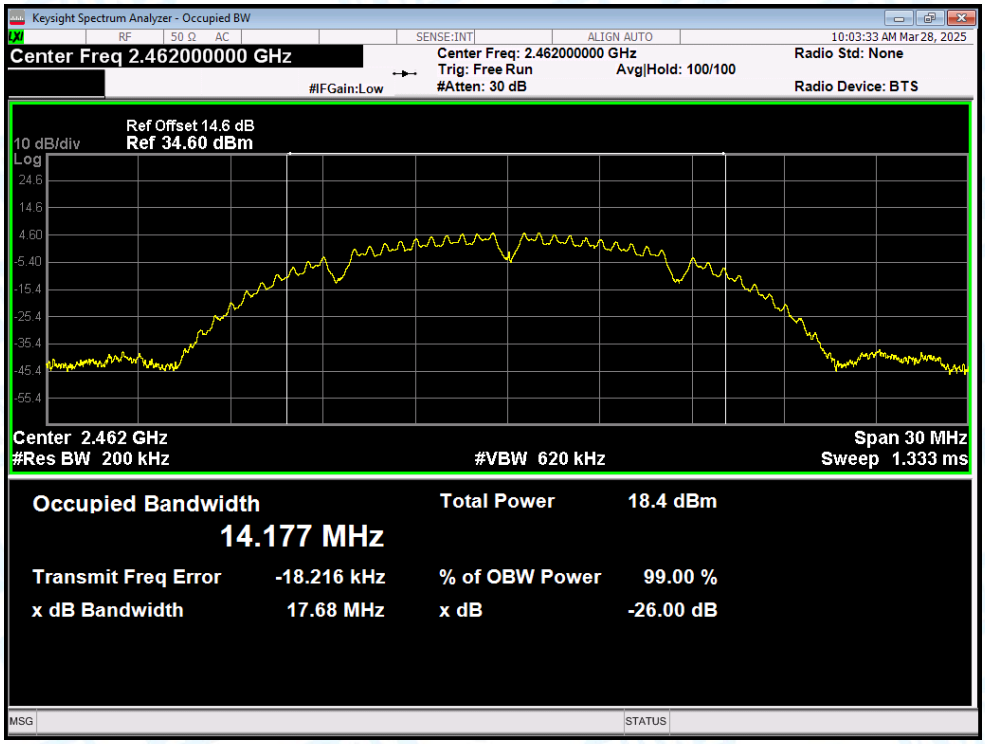

OBW NVNT g 2412MHz Ant1

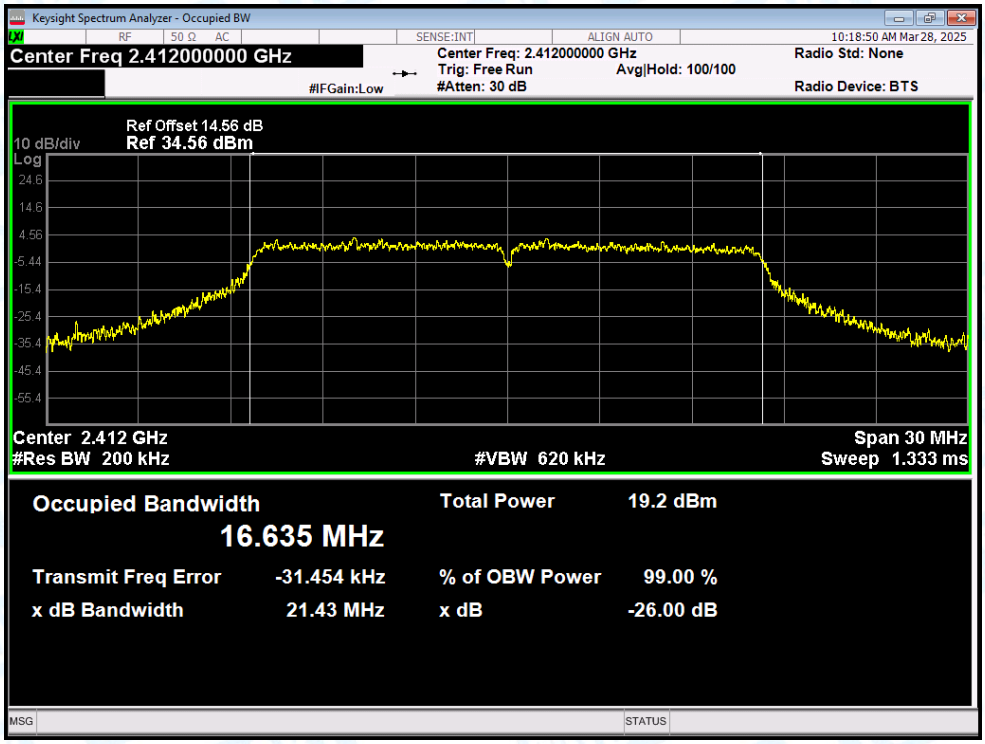

OBW NVNT g 2437MHz Ant1

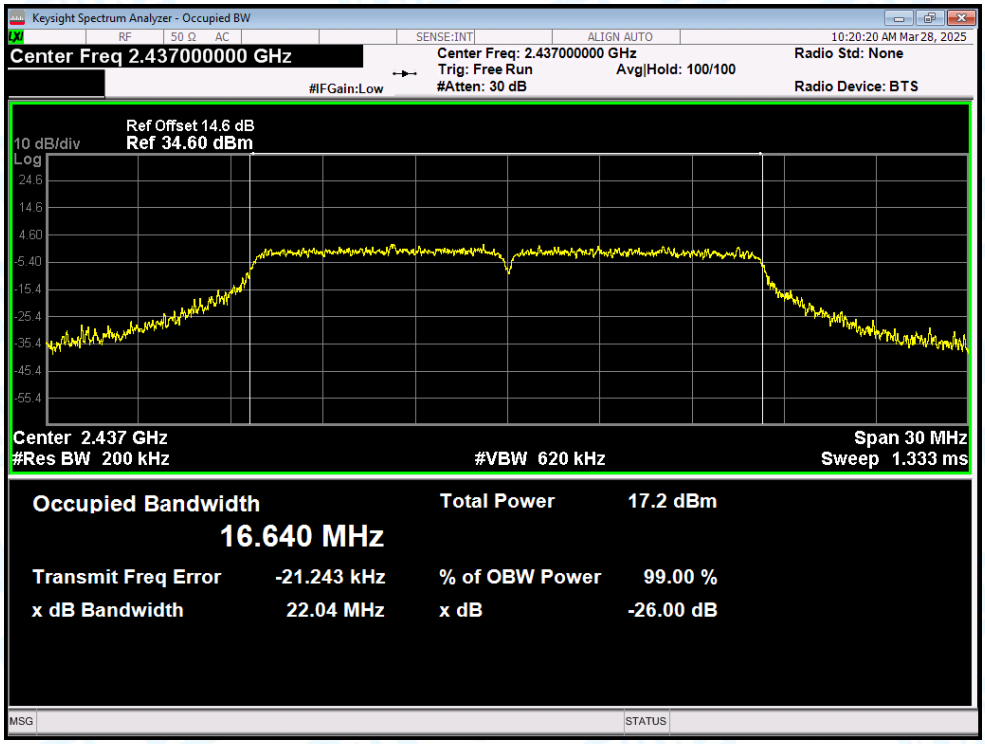

OBW NVNT g 2462MHz Ant1

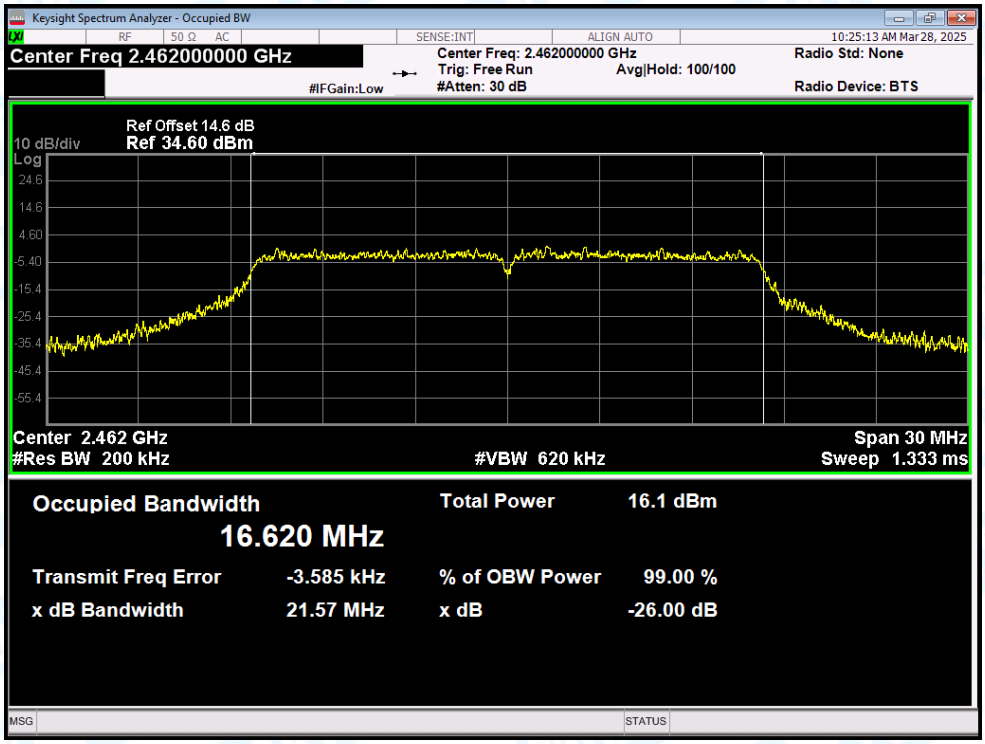

OBW NVNT n(HT20) 2412MHz Ant1

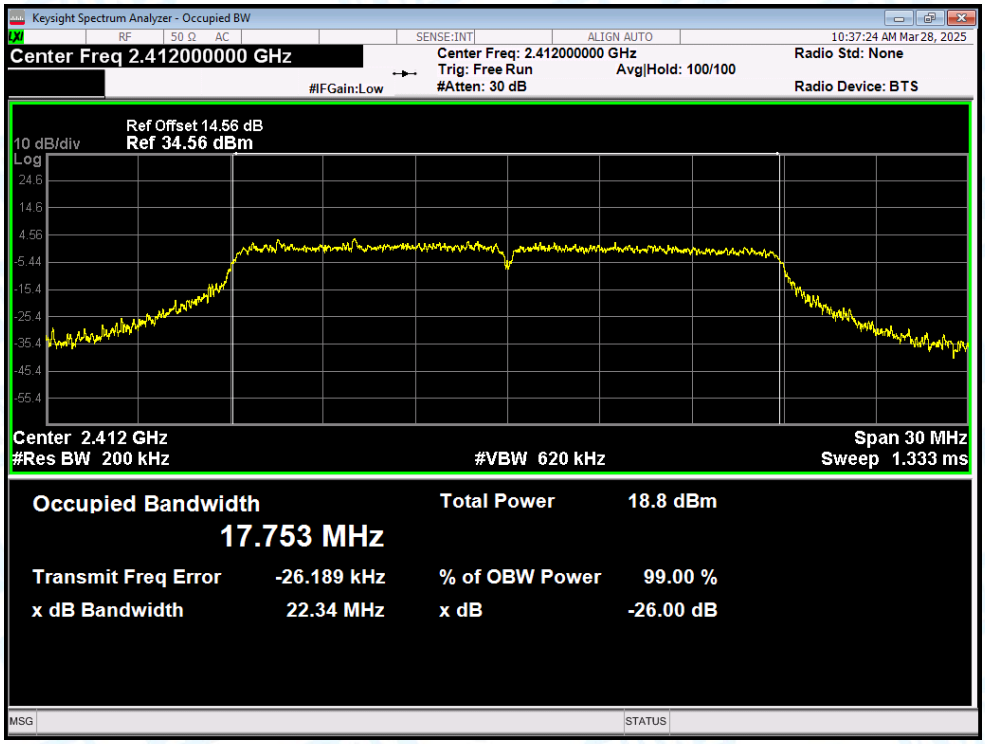

OBW NVNT n(HT20) 2437MHz Ant1

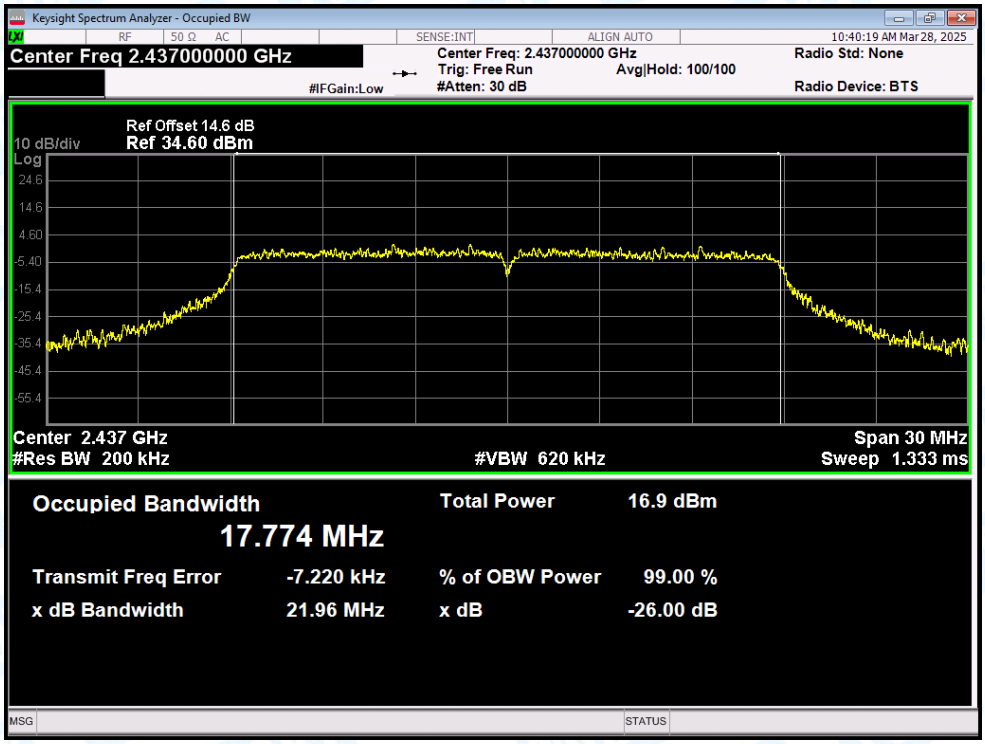

OBW NVNT n(HT20) 2462MHz Ant1

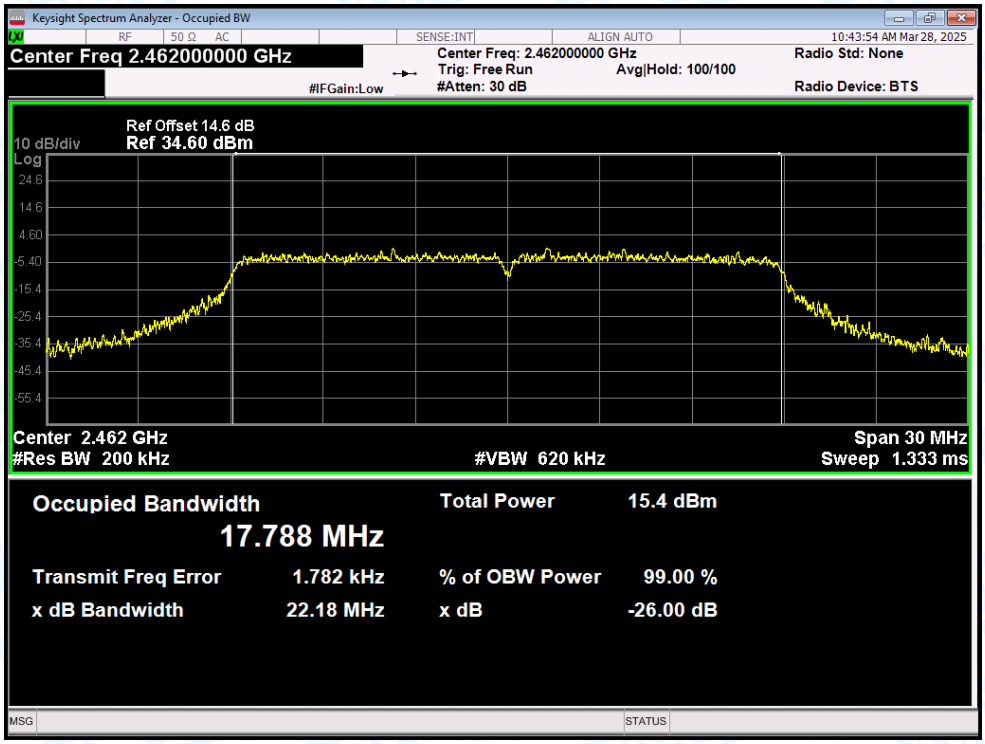

5.Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	-15.482	8	Pass
NVNT	b	2437	Ant1	-17.492	8	Pass
NVNT	b	2462	Ant1	-18.282	8	Pass
NVNT	g	2412	Ant1	-21.5	8	Pass
NVNT	g	2437	Ant1	-22.959	8	Pass
NVNT	g	2462	Ant1	-23.952	8	Pass
NVNT	n(HT20)	2412	Ant1	-21.484	8	Pass
NVNT	n(HT20)	2437	Ant1	-23.436	8	Pass
NVNT	n(HT20)	2462	Ant1	-24.916	8	Pass

Test Graphs

PSD NVNT b 2412MHz Ant1

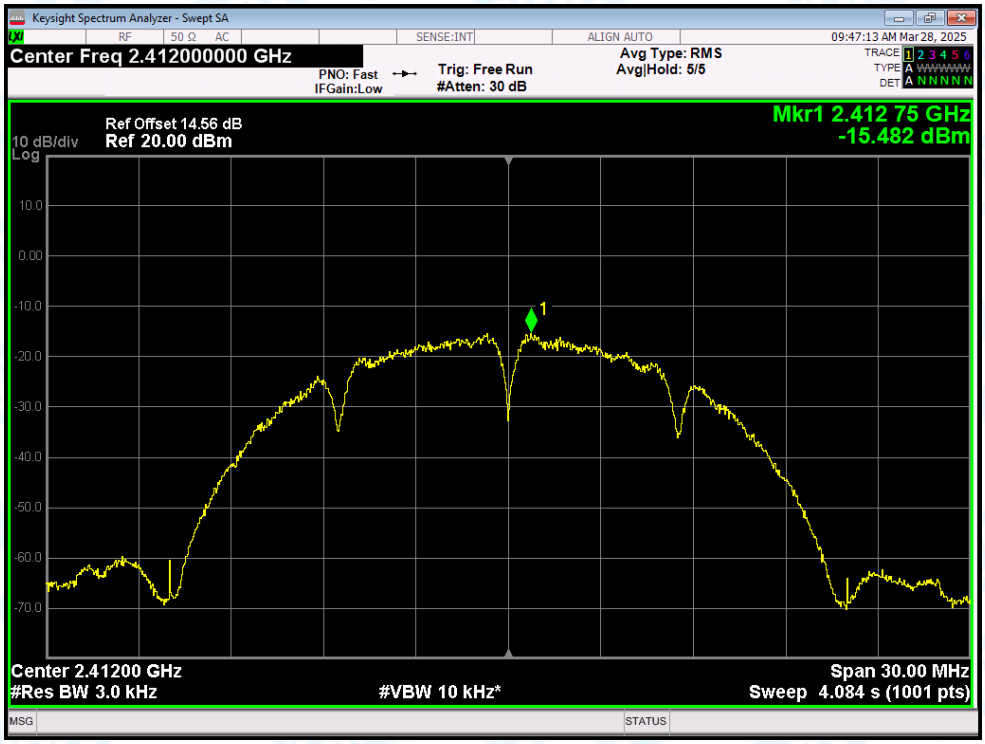

PSD NVNT b 2437MHz Ant1

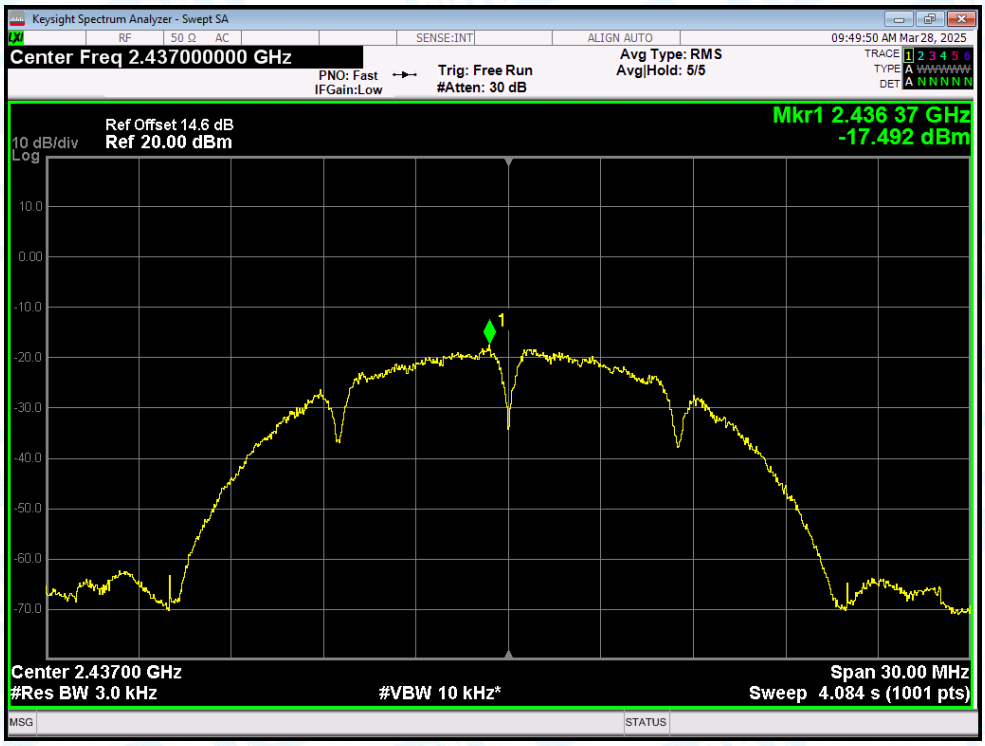

PSD NVNT b 2462MHz Ant1

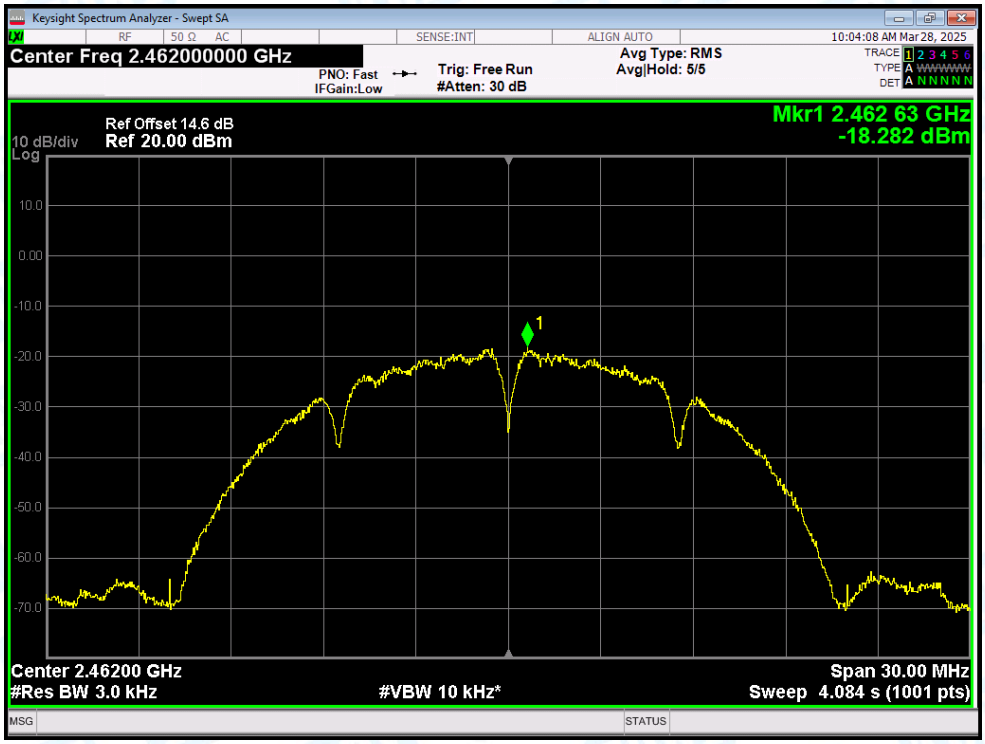

PSD NVNT g 2412MHz Ant1

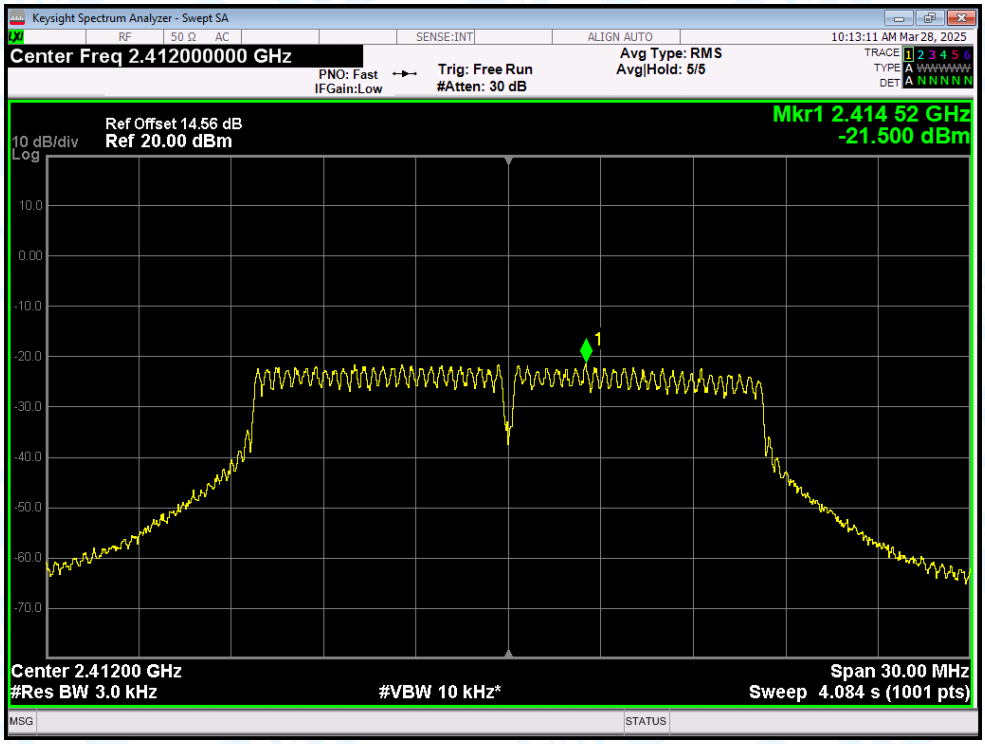

PSD NVNT g 2437MHz Ant1

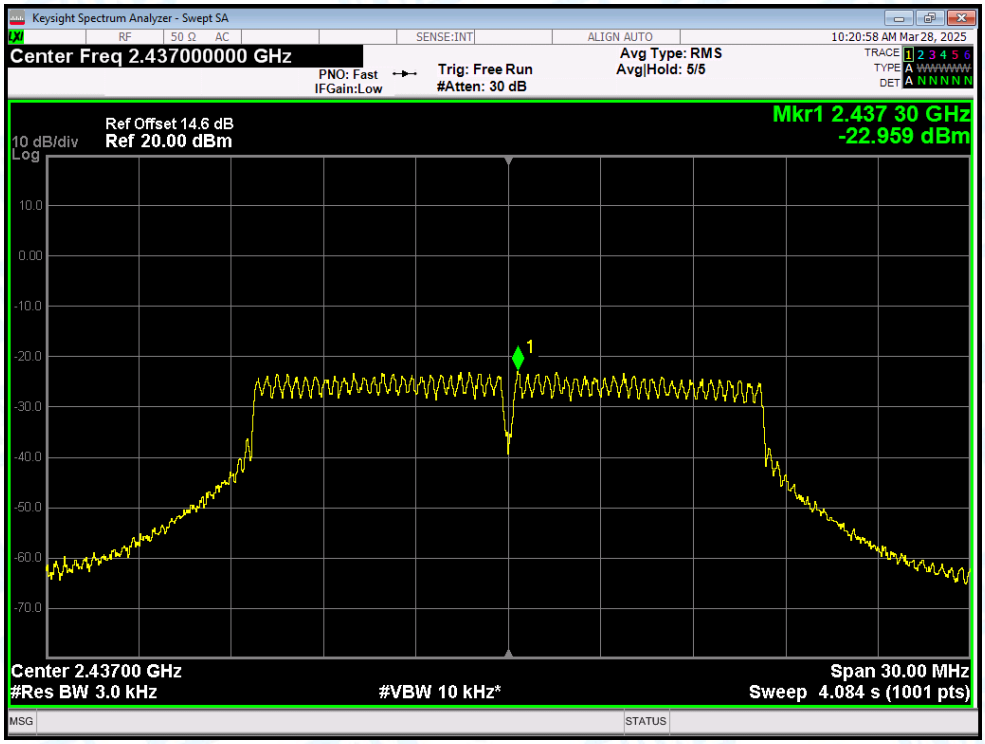

PSD NVNT g 2462MHz Ant1

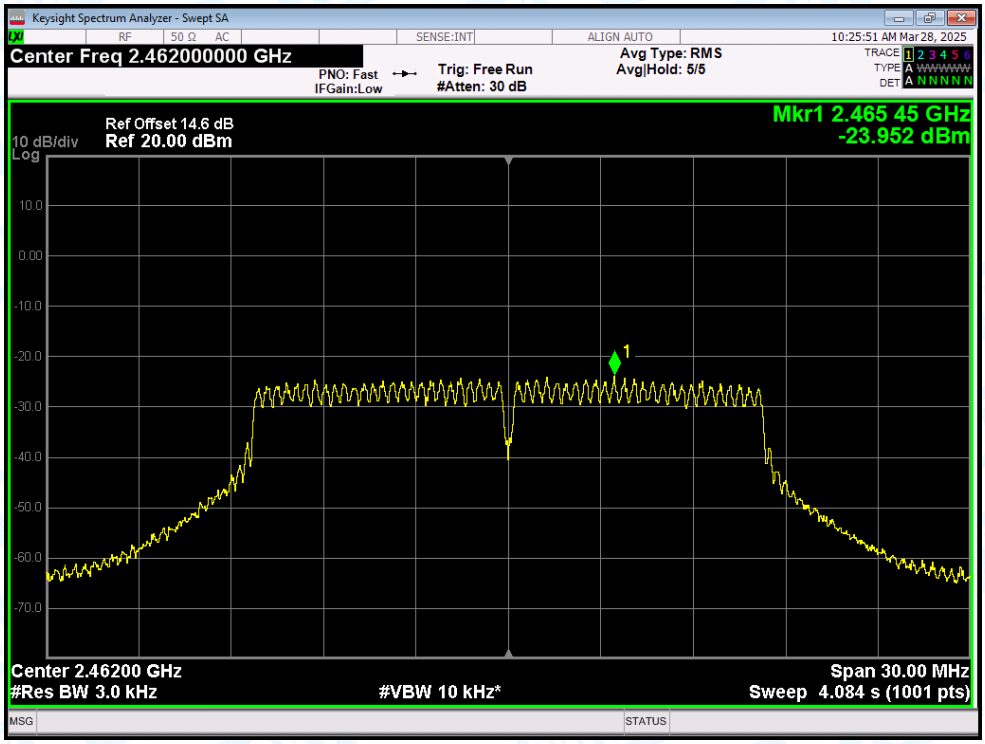

PSD NVNT n(HT20) 2412MHz Ant1

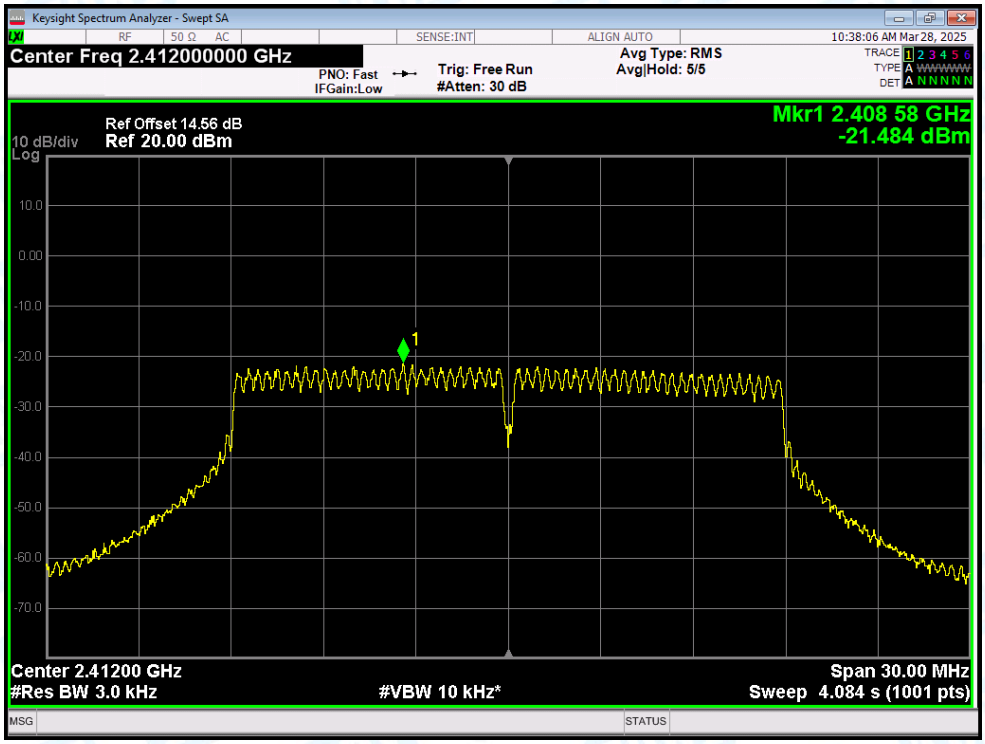

PSD NVNT n(HT20) 2437MHz Ant1

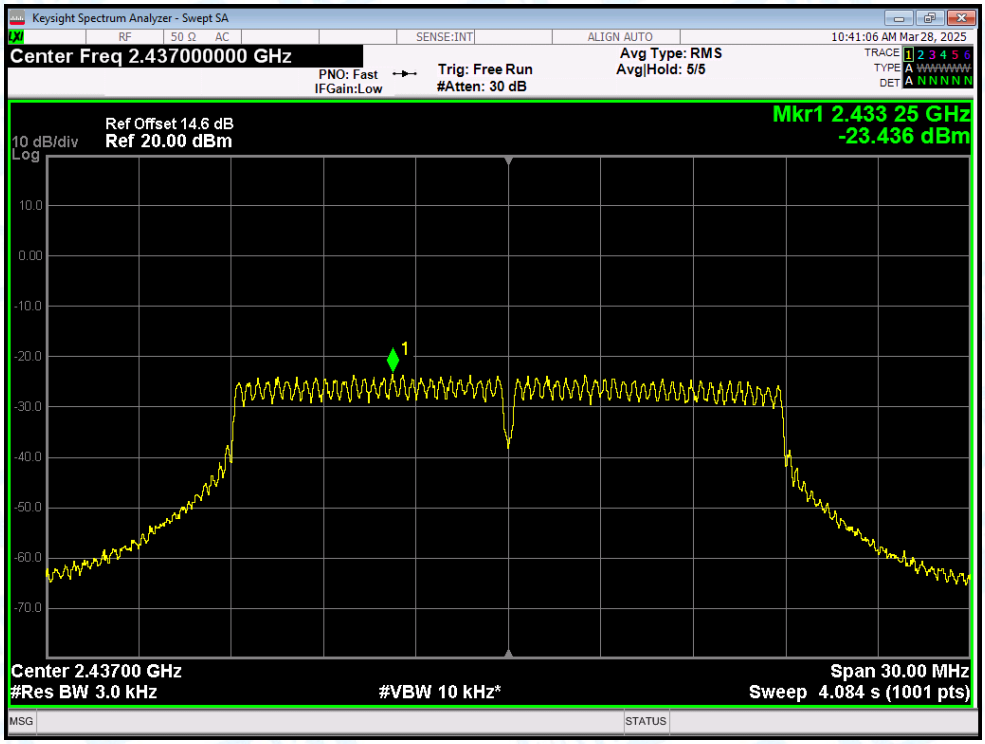

PSD NVNT n(HT20) 2462MHz Ant1

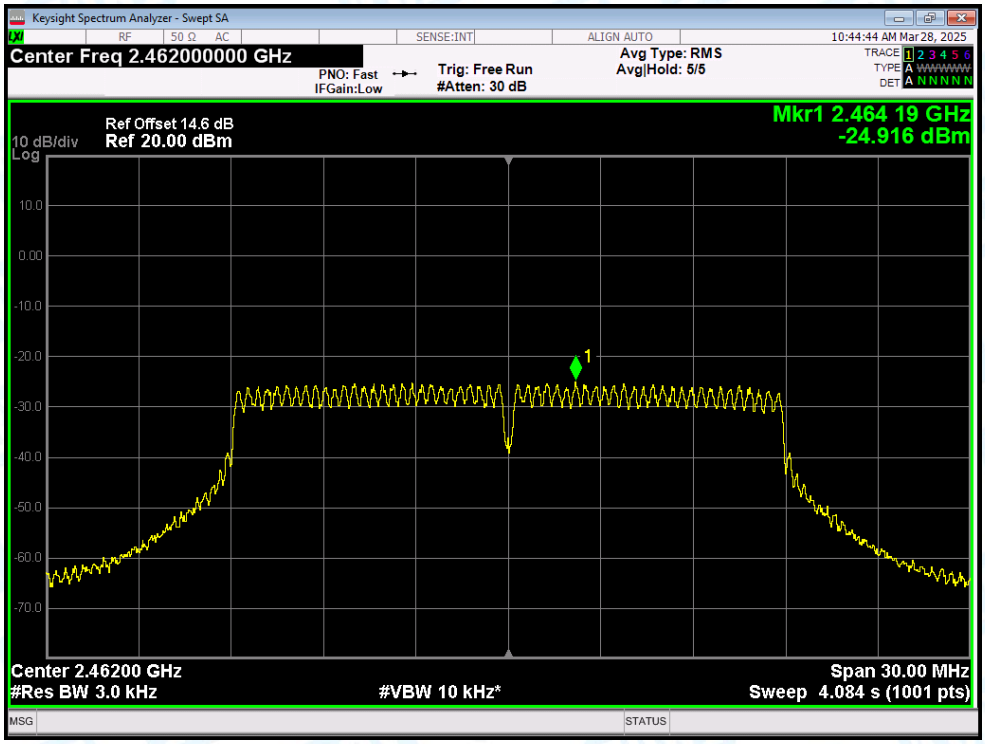

6.Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-50.9	-30	Pass
NVNT	b	2462	Ant1	-49.08	-30	Pass
NVNT	g	2412	Ant1	-43.05	-30	Pass
NVNT	g	2462	Ant1	-41.91	-30	Pass
NVNT	n(HT20)	2412	Ant1	-43.4	-30	Pass
NVNT	n(HT20)	2462	Ant1	-41.28	-30	Pass

Test Graphs

Band Edge NVNT b 2412MHz Ant1 Ref

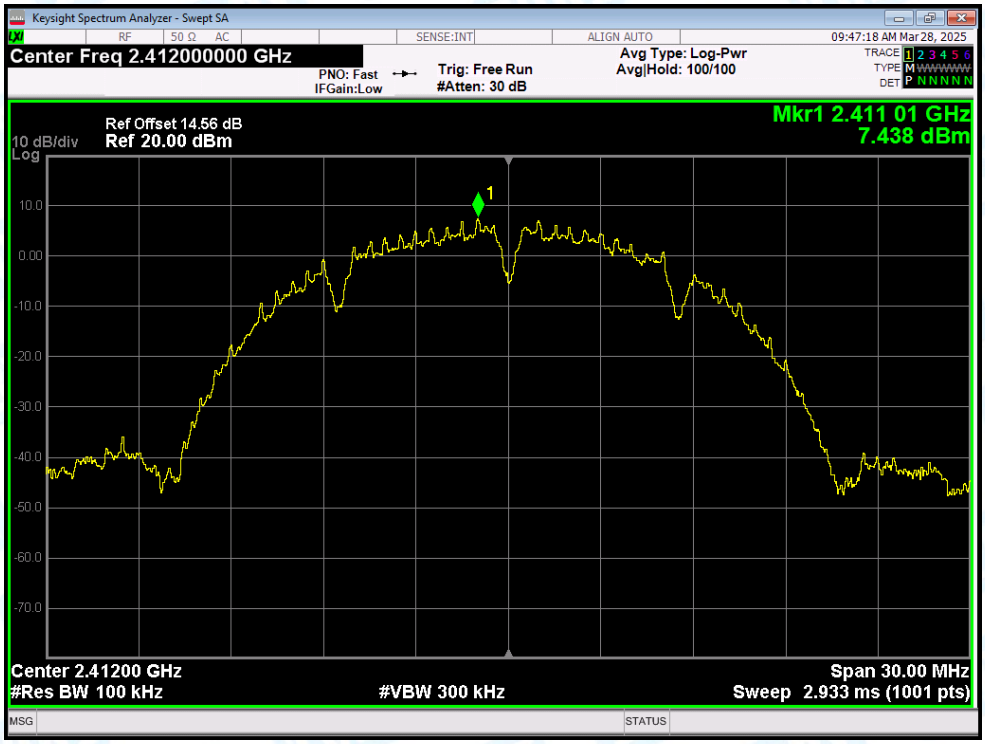

Band Edge NVNT b 2412MHz Ant1 Emission

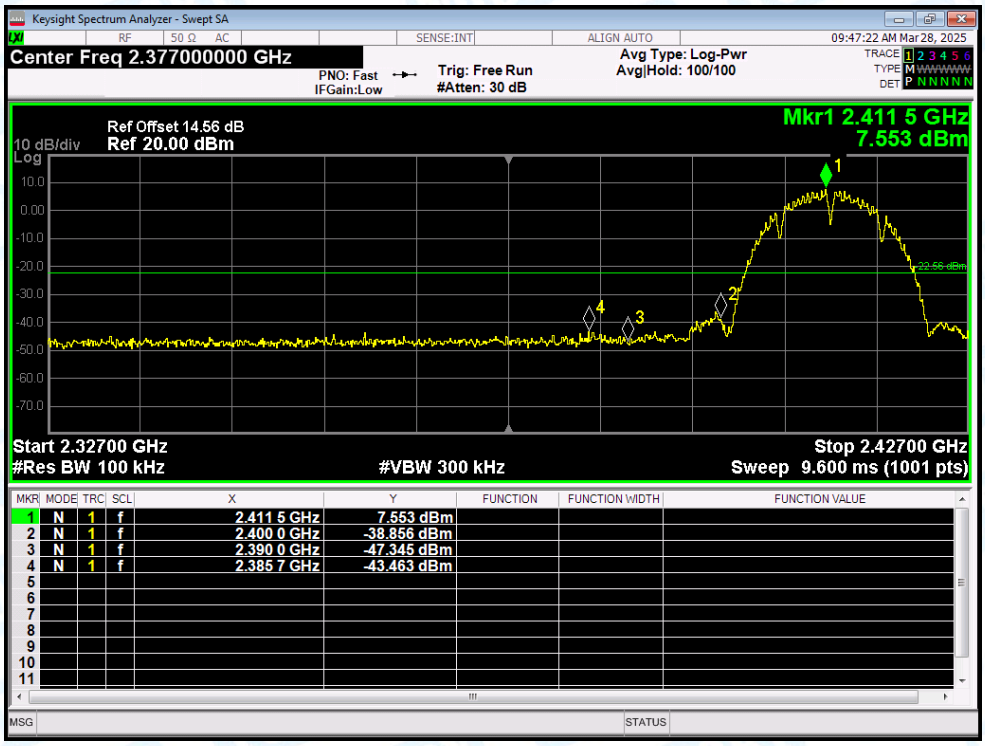

Band Edge NVNT b 2462MHz Ant1 Ref

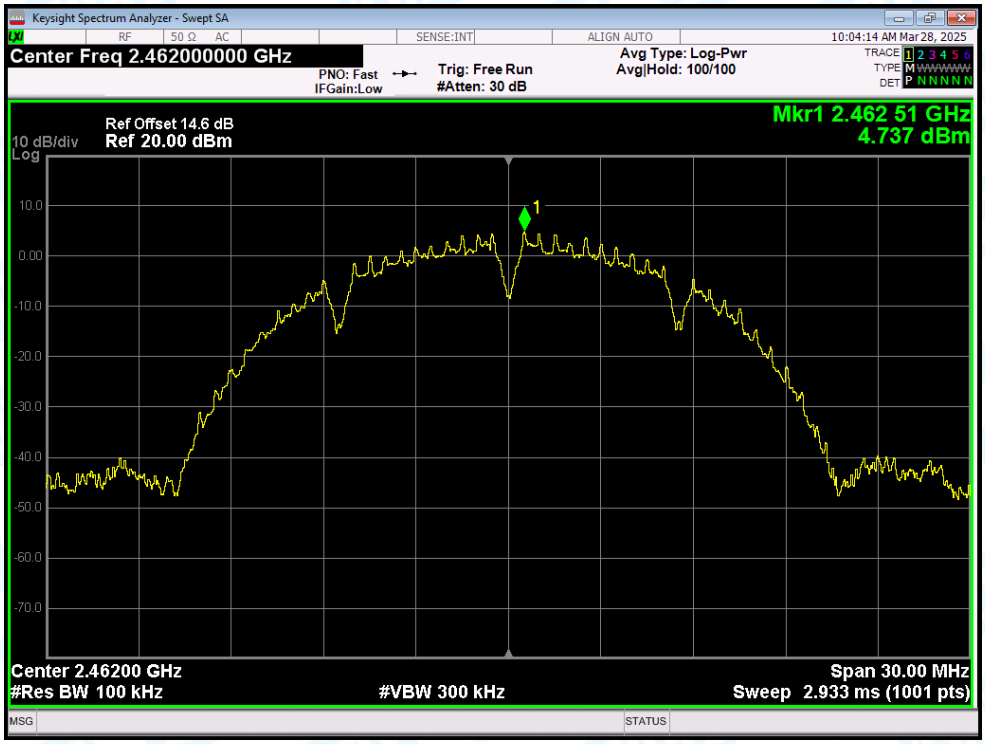

Band Edge NVNT b 2462MHz Ant1 Emission

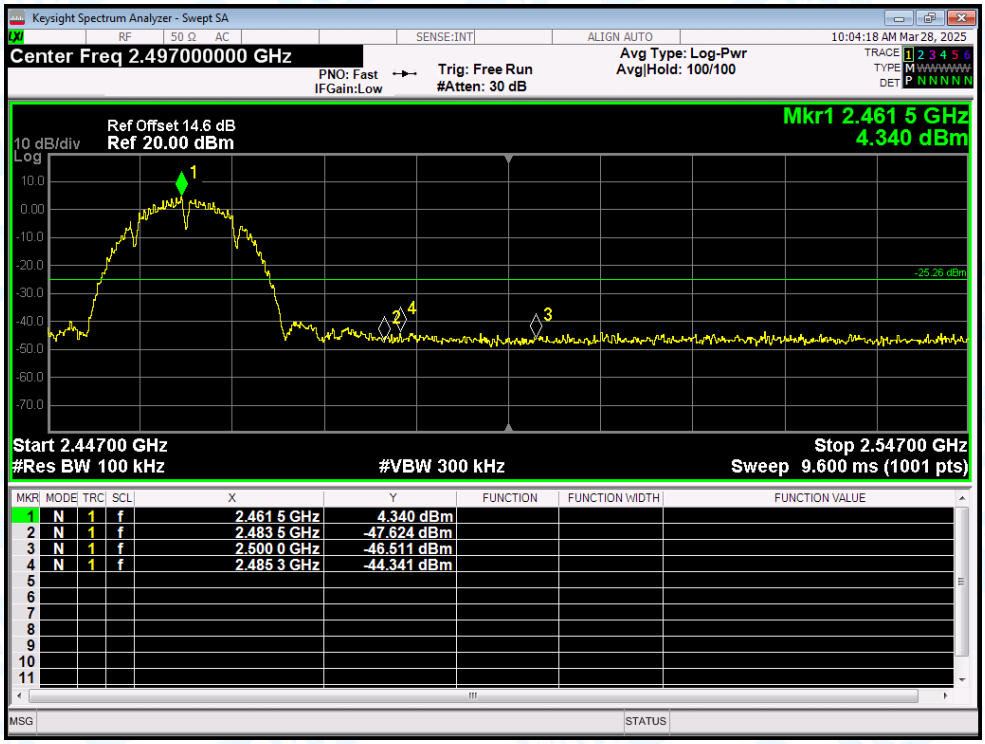

Band Edge NVNT g 2412MHz Ant1 Ref

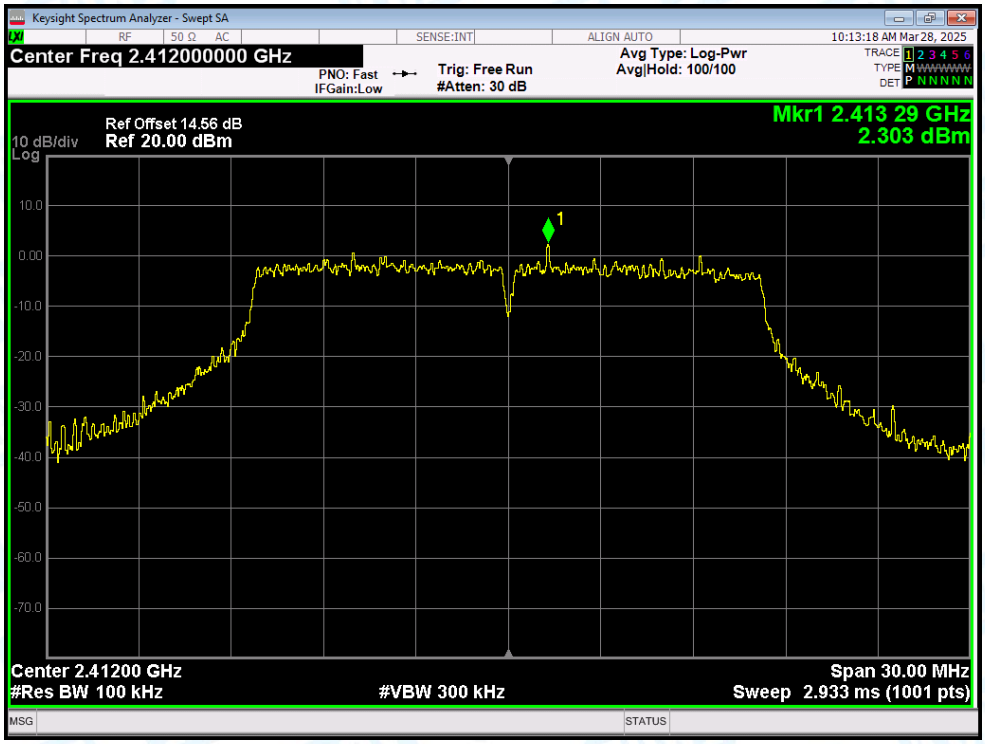

Band Edge NVNT g 2412MHz Ant1 Emission

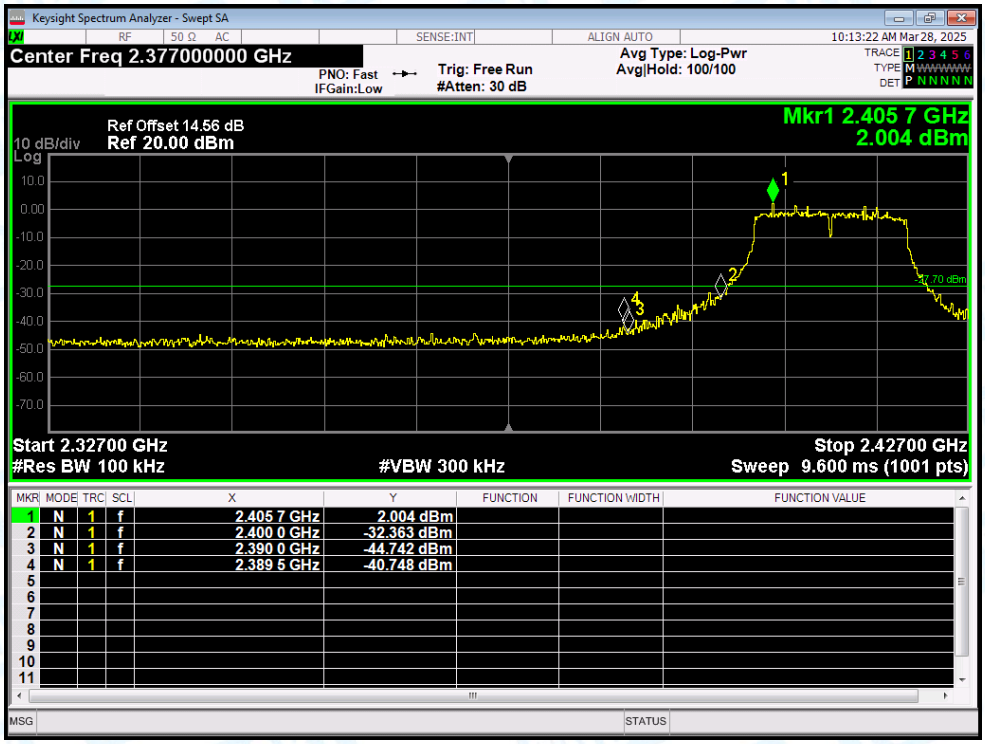

Band Edge NVNT g 2462MHz Ant1 Ref

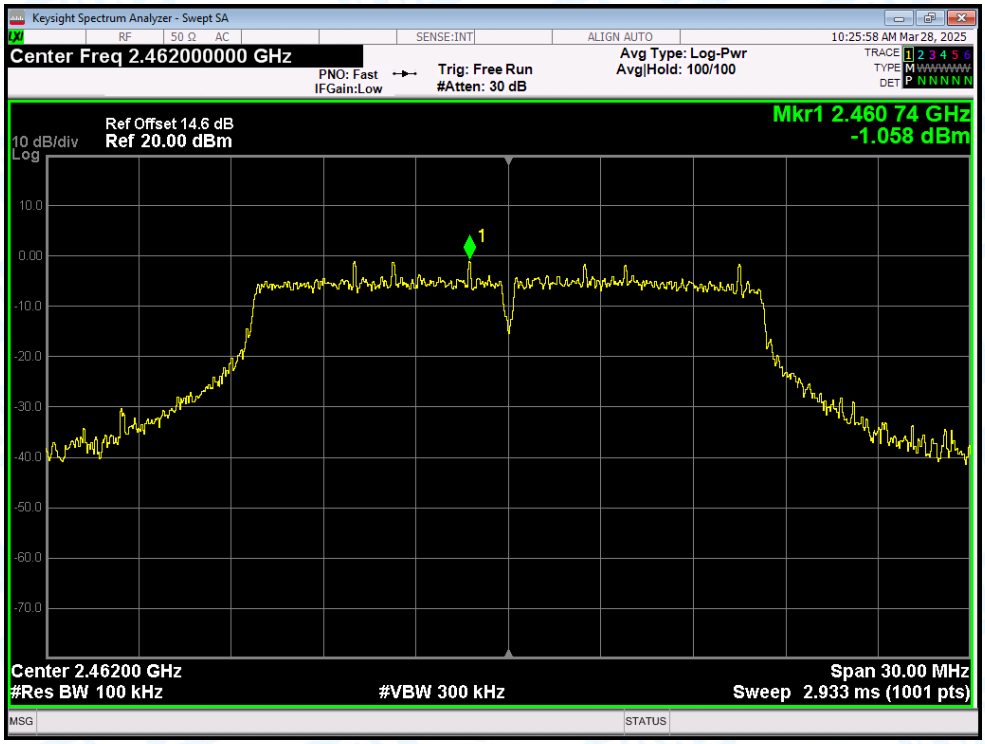

Band Edge NVNT g 2462MHz Ant1 Emission

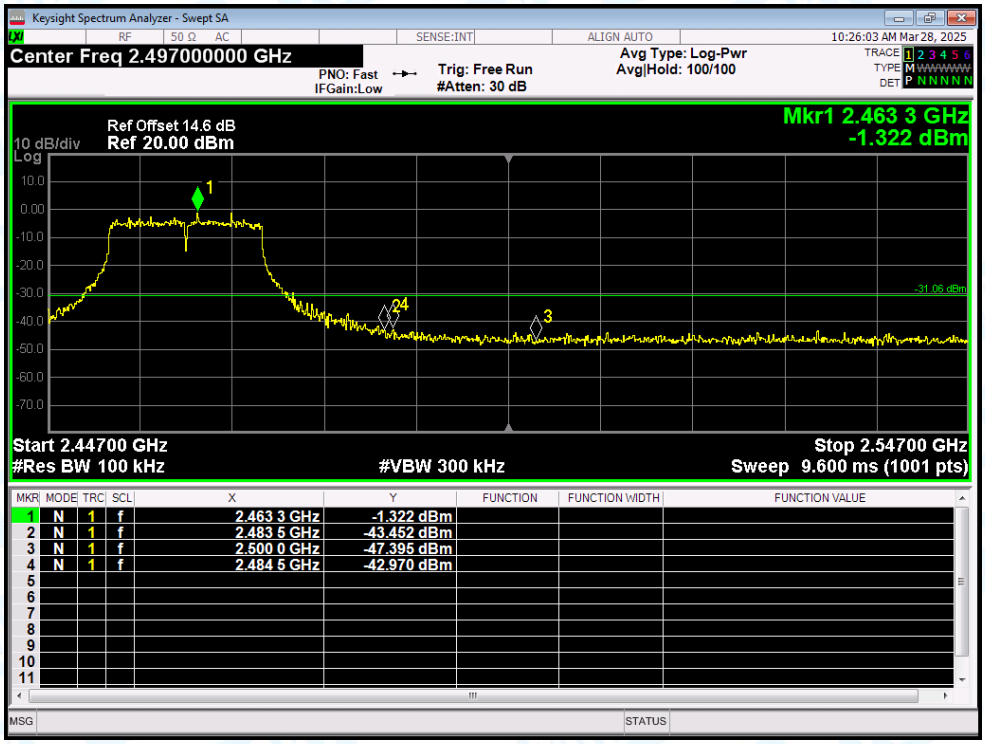

Band Edge NVNT n(HT20) 2412MHz Ant1 Ref

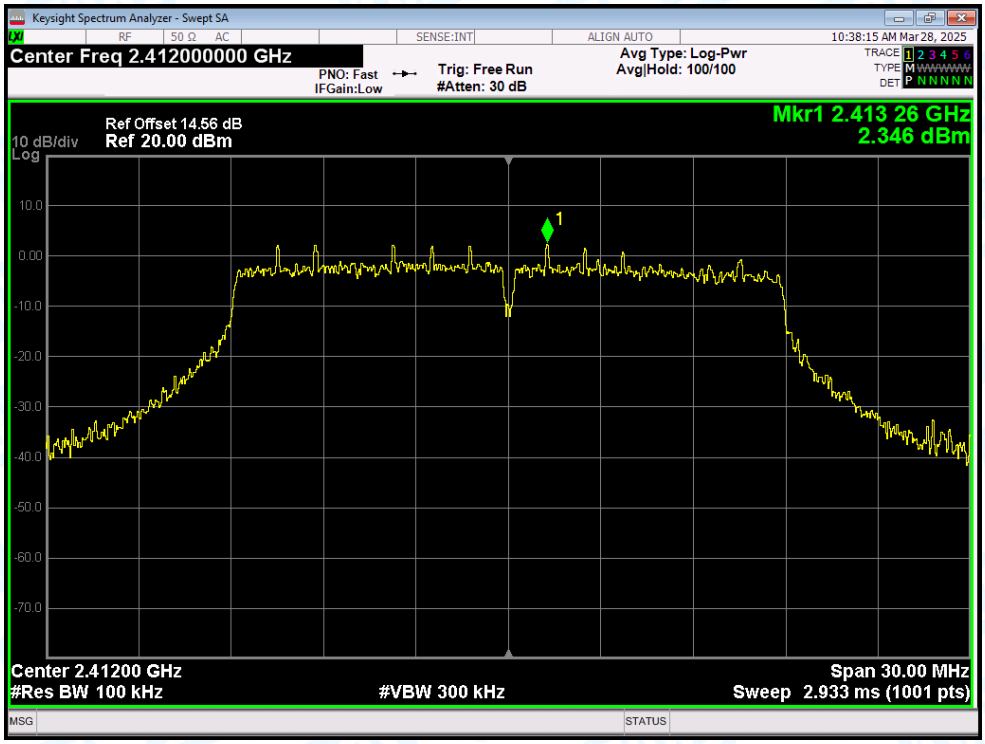

Band Edge NVNT n(HT20) 2412MHz Ant1 Emission

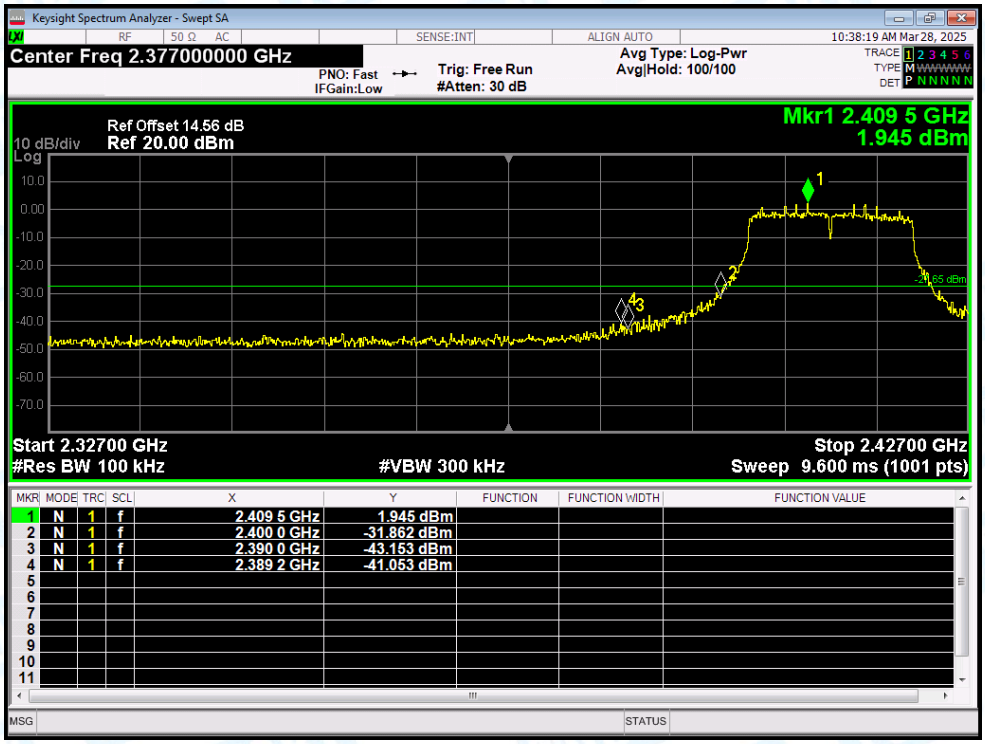

Band Edge NVNT n(HT20) 2462MHz Ant1 Ref

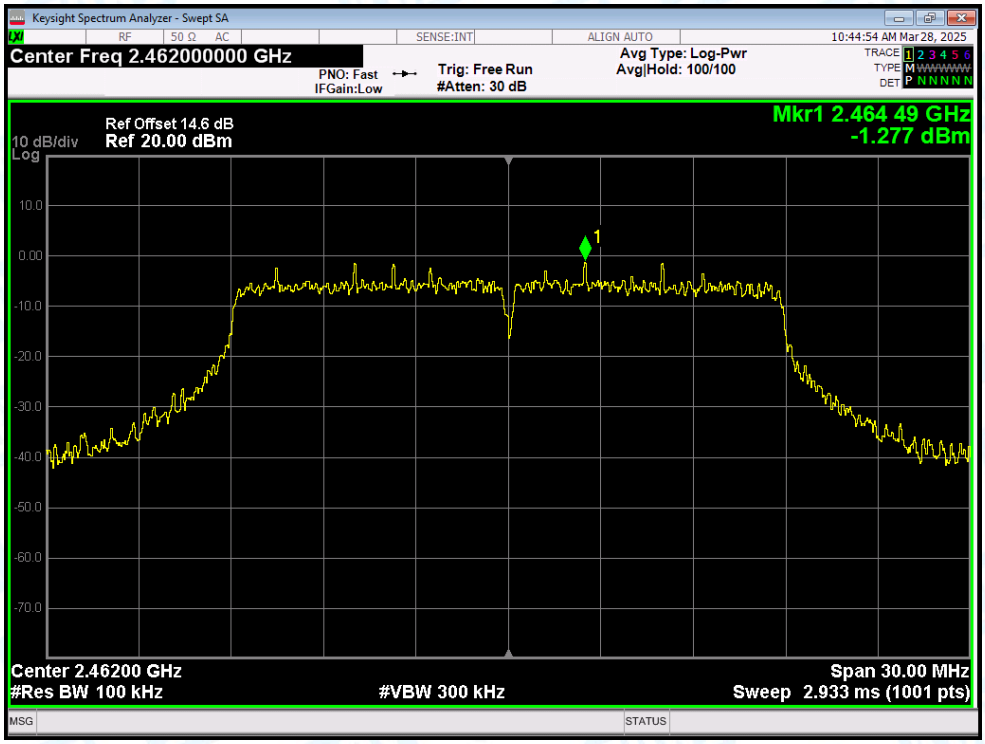

Band Edge NVNT n(HT20) 2462MHz Ant1 Emission

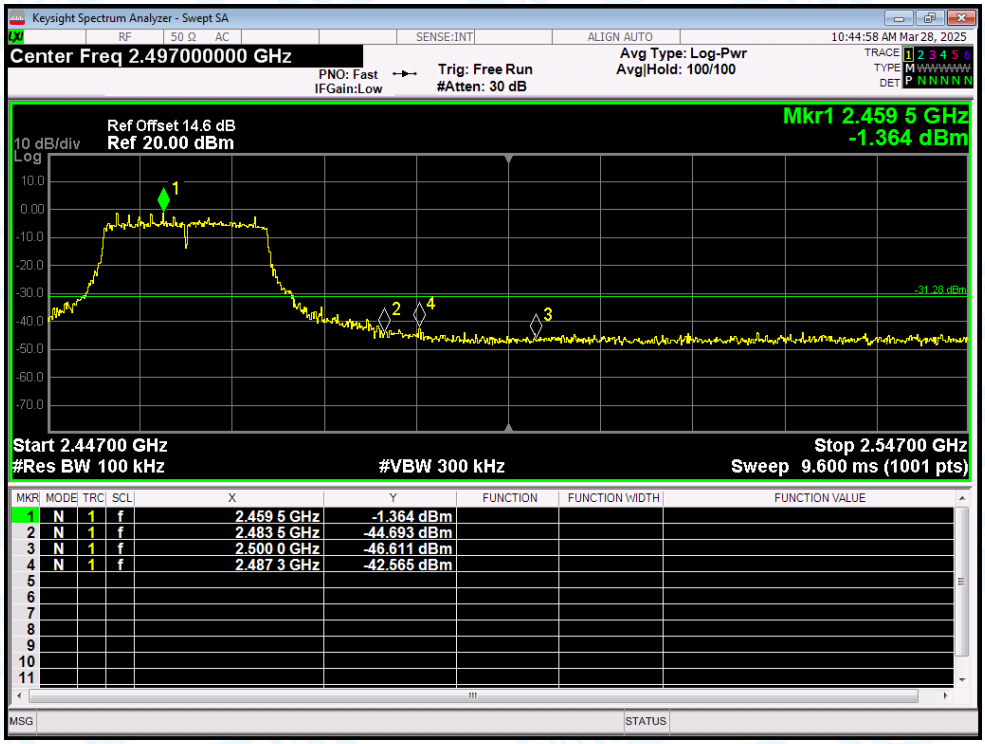

7.Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-52.61	-30	Pass
NVNT	b	2437	Ant1	-50.48	-30	Pass
NVNT	b	2462	Ant1	-49.03	-30	Pass
NVNT	g	2412	Ant1	-47.41	-30	Pass
NVNT	g	2437	Ant1	-45.41	-30	Pass
NVNT	g	2462	Ant1	-44.5	-30	Pass
NVNT	n(HT20)	2412	Ant1	-46.21	-30	Pass
NVNT	n(HT20)	2437	Ant1	-44.78	-30	Pass
NVNT	n(HT20)	2462	Ant1	-43.59	-30	Pass

Test Graphs

Tx. Spurious NVNT b 2412MHz Ant1 Ref

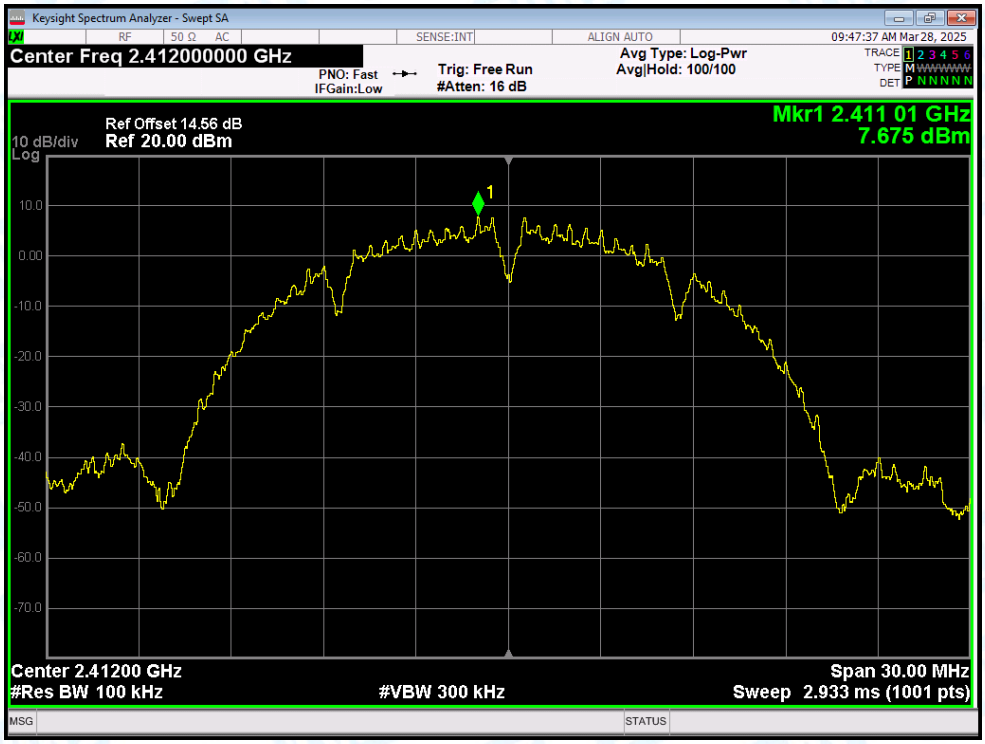

Tx. Spurious NVNT b 2412MHz Ant1 Emission

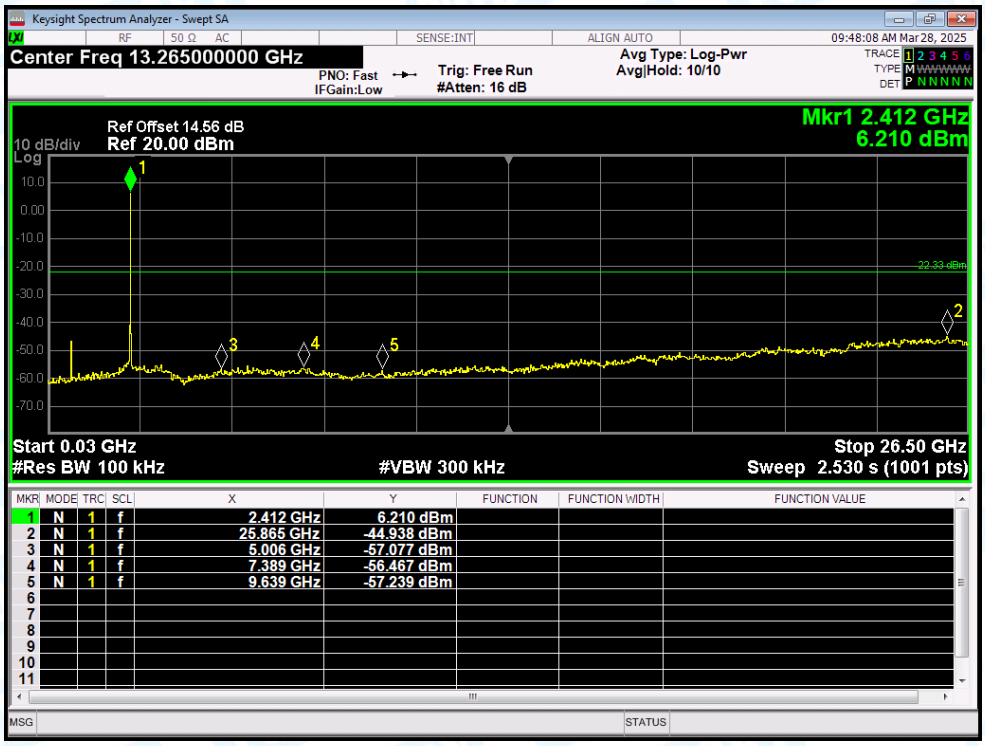

Tx. Spurious NVNT b 2437MHz Ant1 Ref

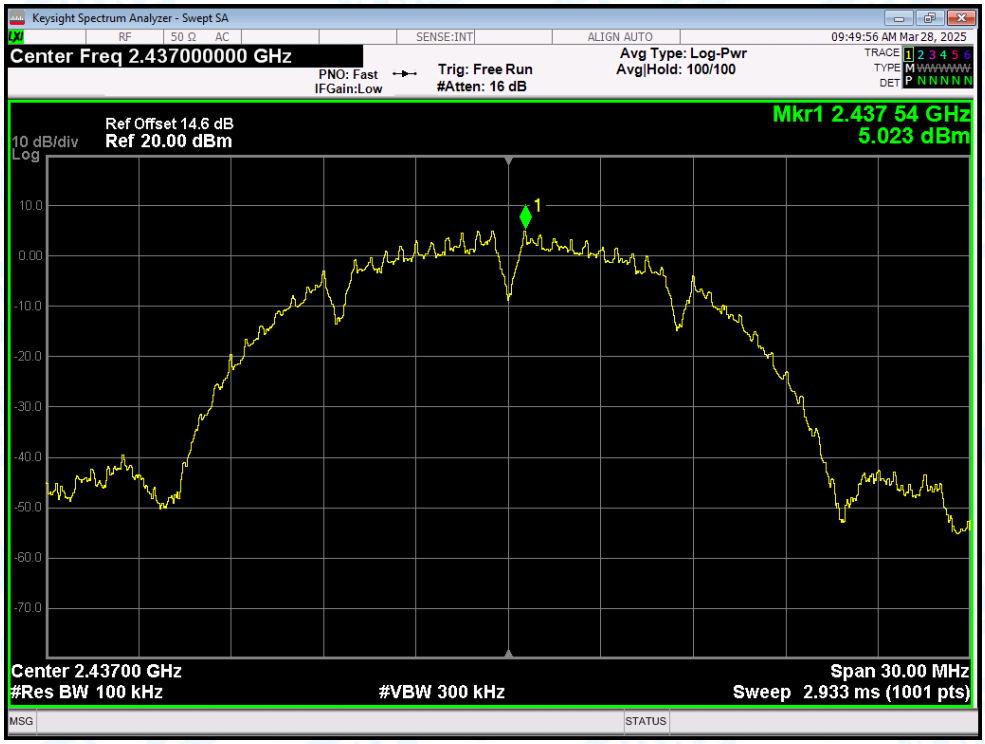

Tx. Spurious NVNT b 2437MHz Ant1 Emission

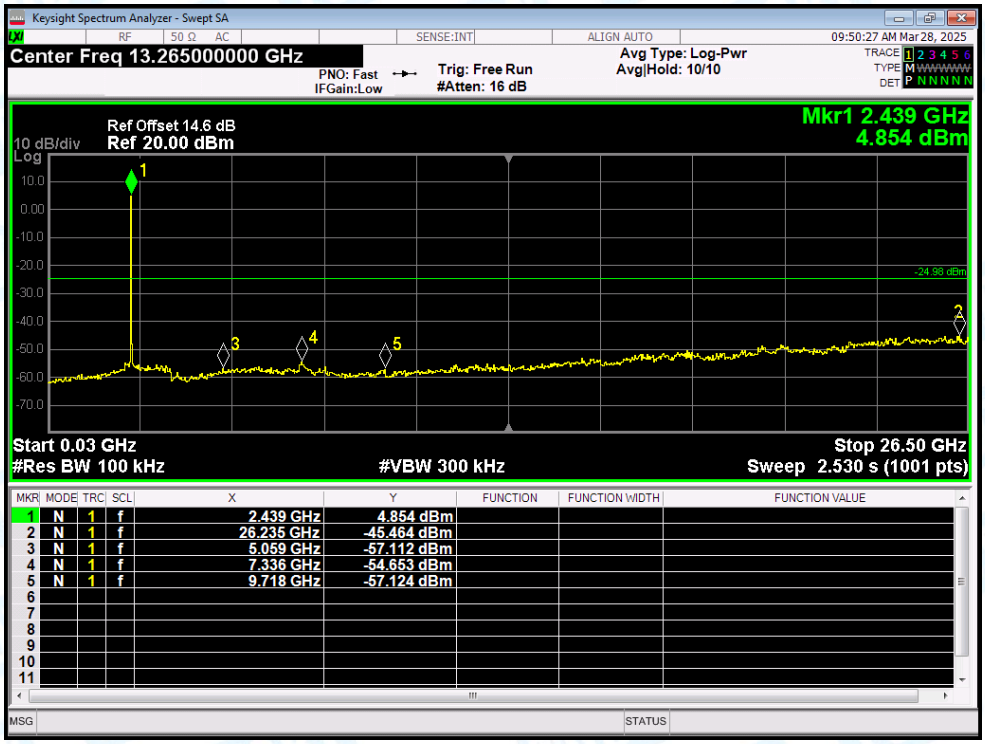

Tx. Spurious NVNT b 2462MHz Ant1 Ref

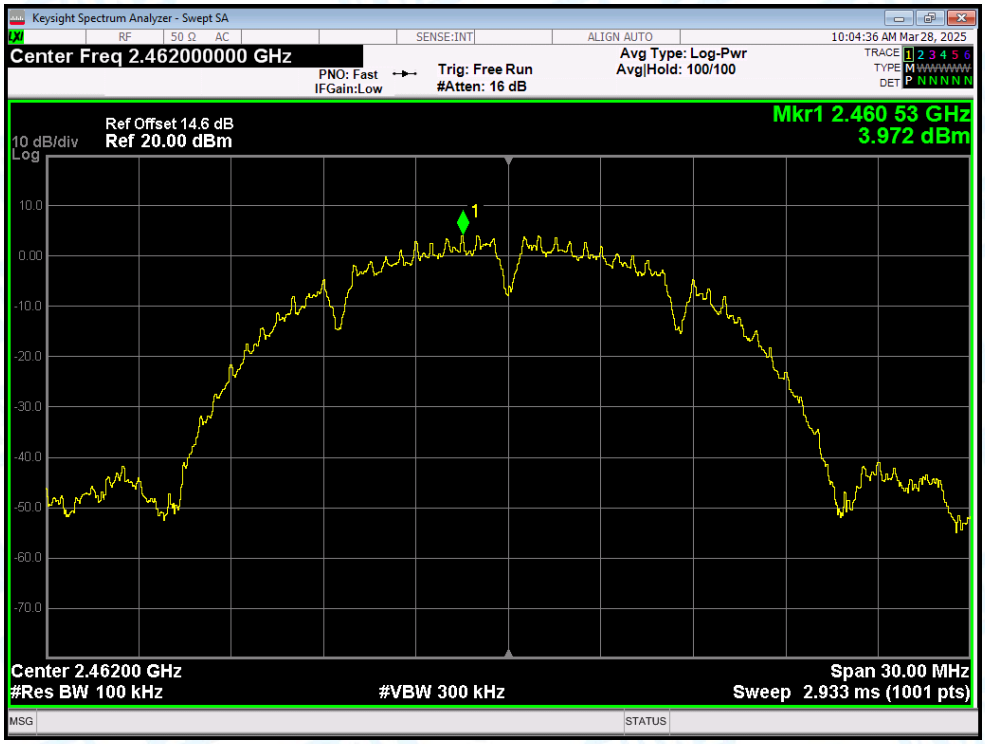

Tx. Spurious NVNT b 2462MHz Ant1 Emission

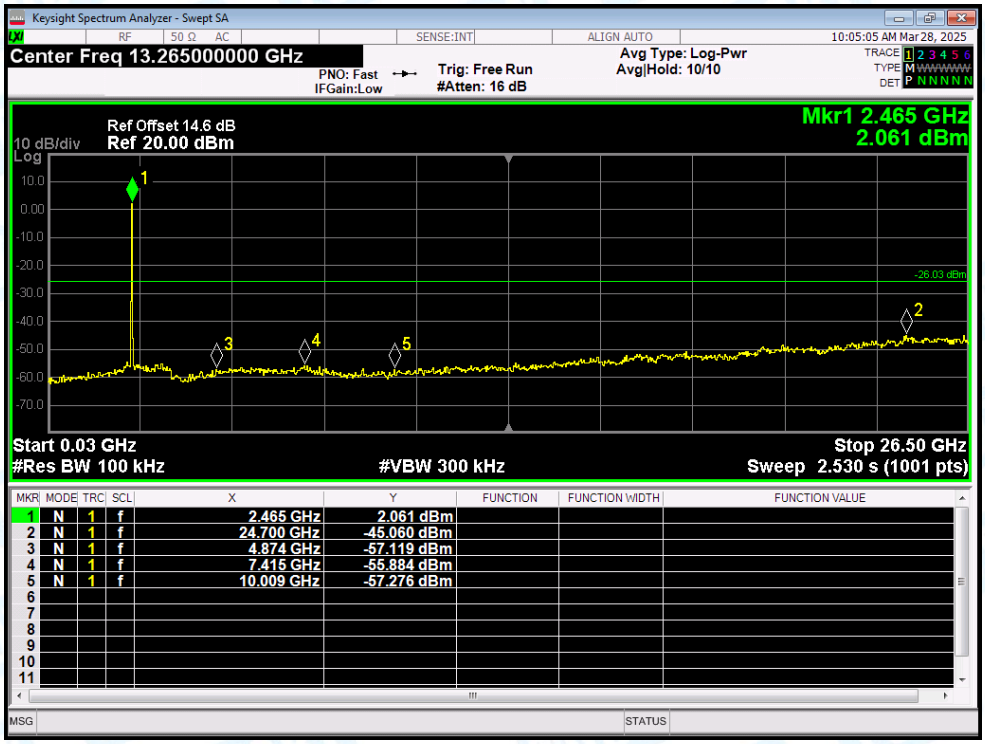

Tx. Spurious NVNT g 2412MHz Ant1 Ref

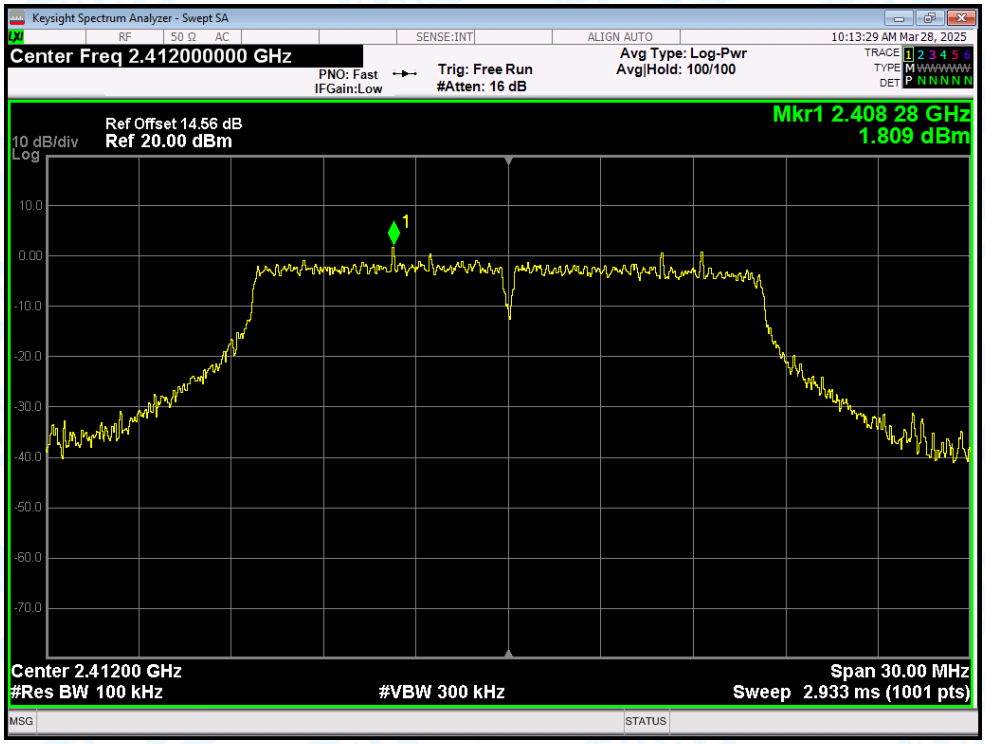

Tx. Spurious NVNT g 2412MHz Ant1 Emission

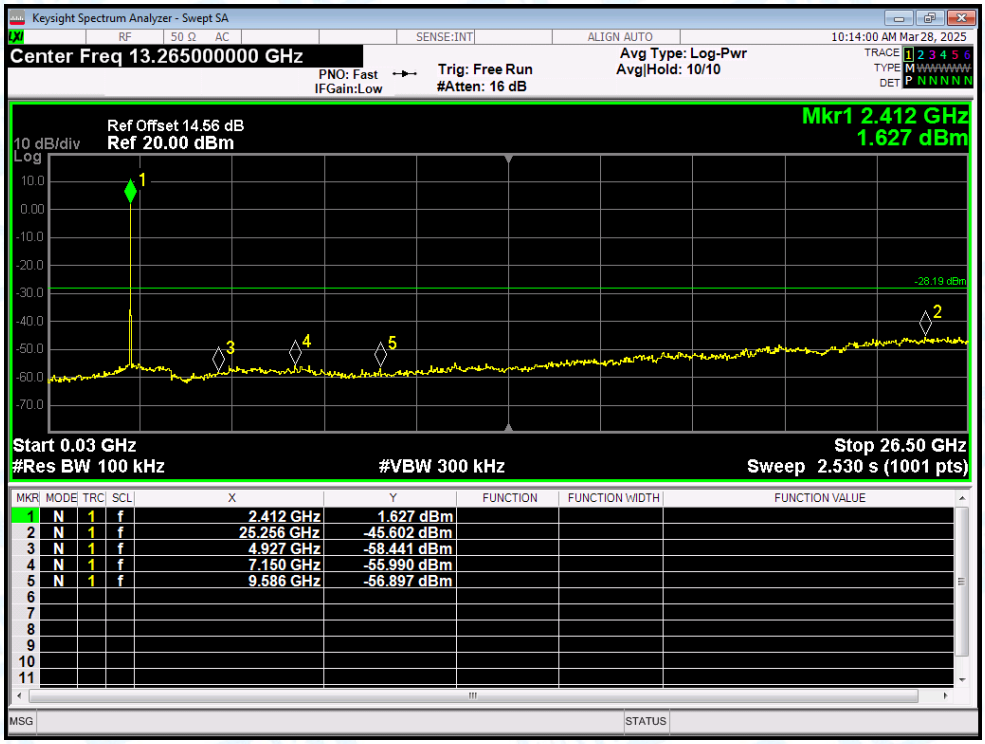

Tx. Spurious NVNT g 2437MHz Ant1 Ref

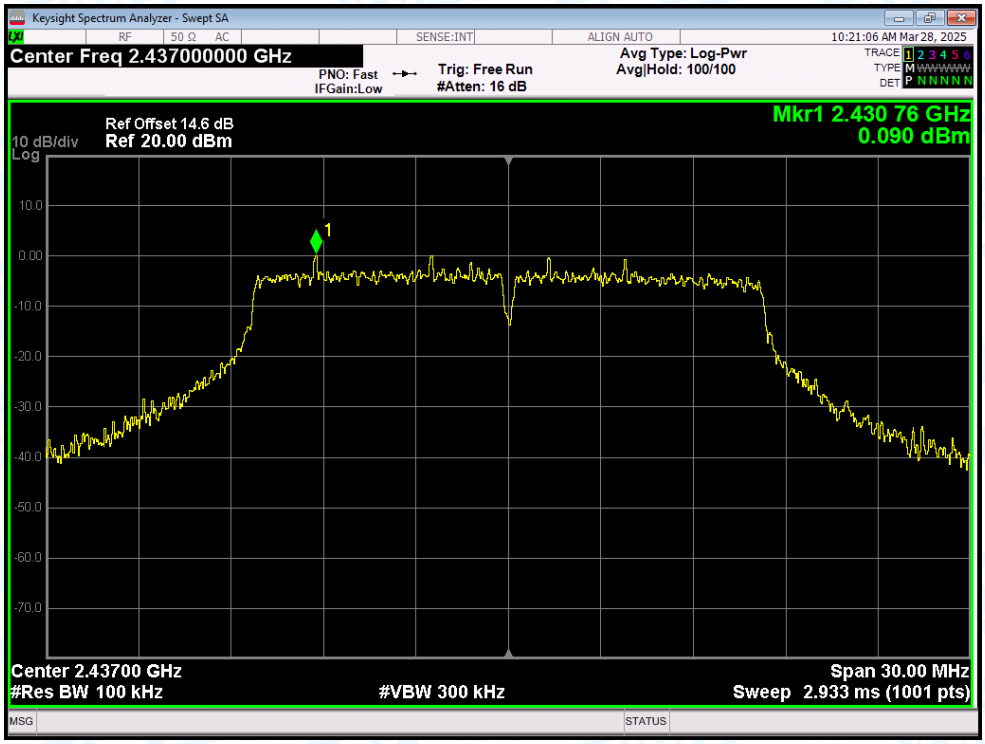

Tx. Spurious NVNT g 2437MHz Ant1 Emission

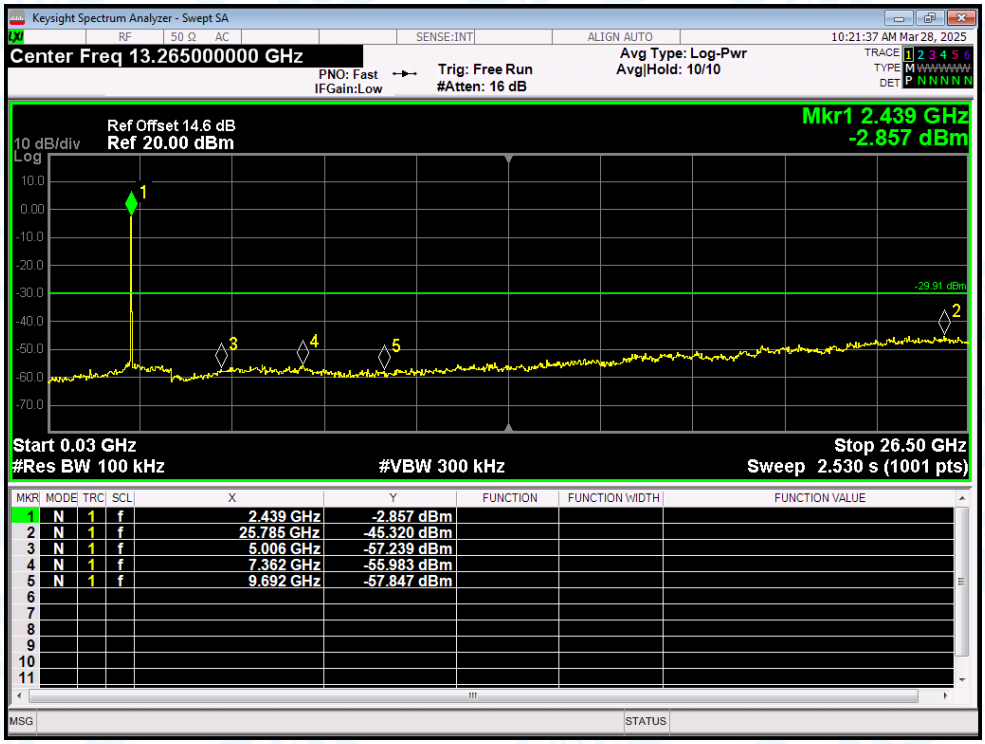

Tx. Spurious NVNT g 2462MHz Ant1 Ref

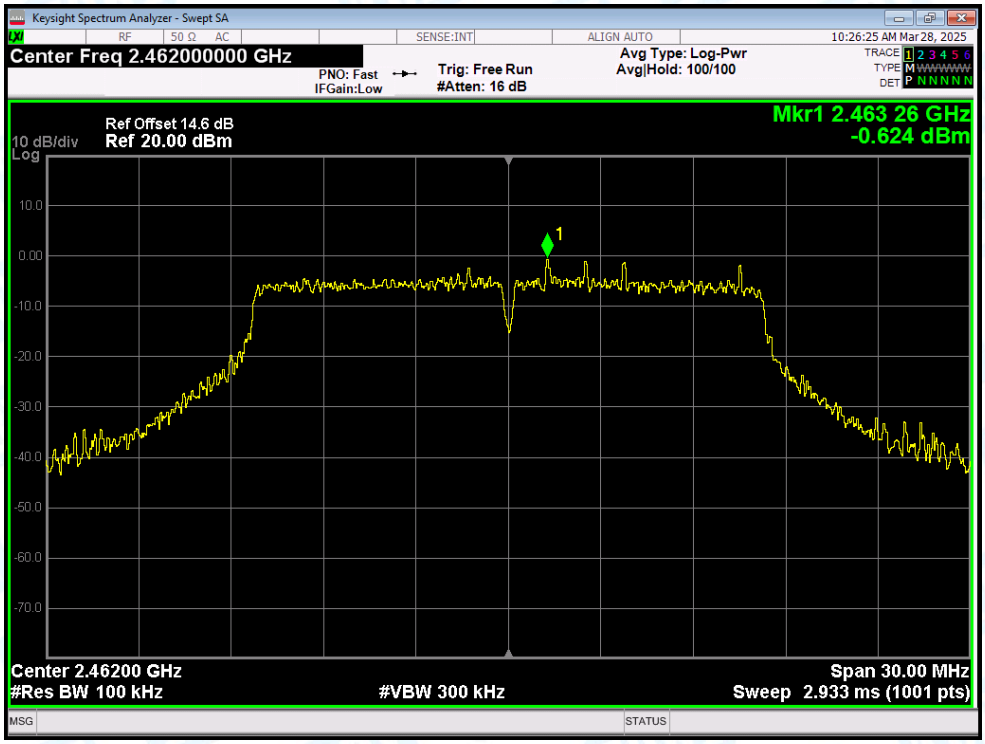

Tx. Spurious NVNT g 2462MHz Ant1 Emission

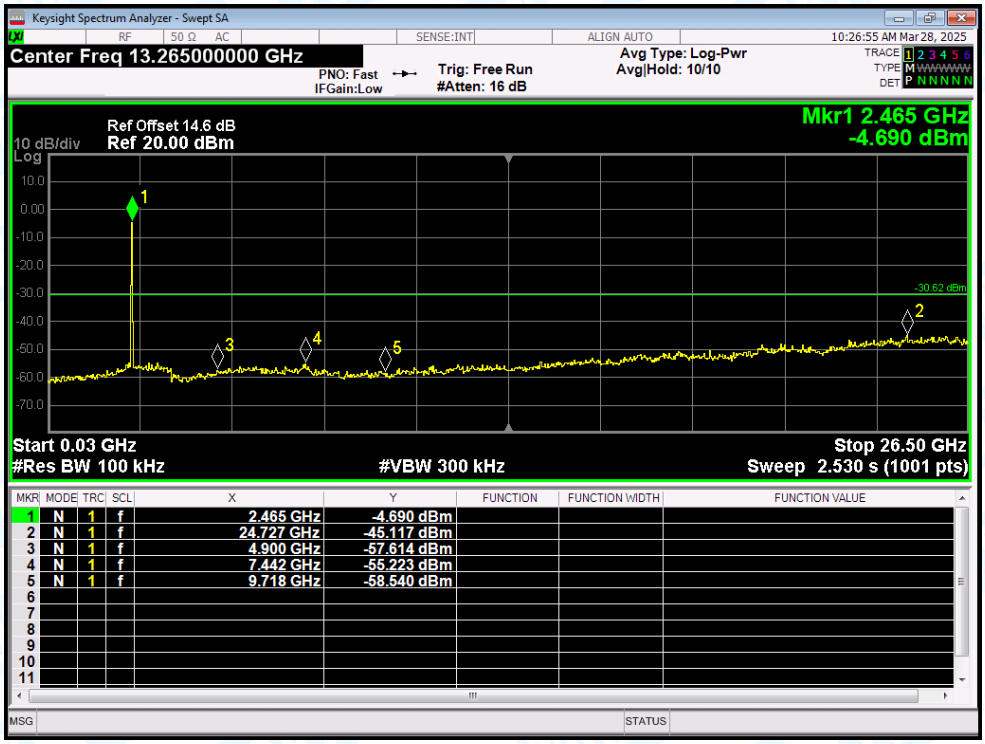

Tx. Spurious NVNT n(HT20) 2412MHz Ant1 Ref

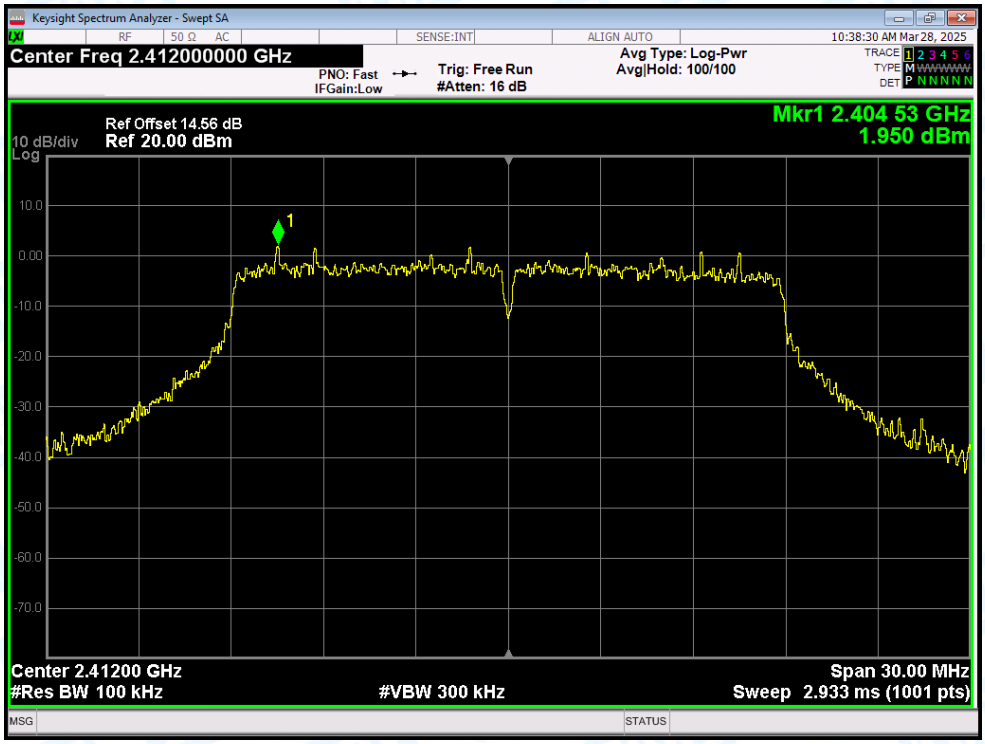

Tx. Spurious NVNT n(HT20) 2412MHz Ant1 Emission

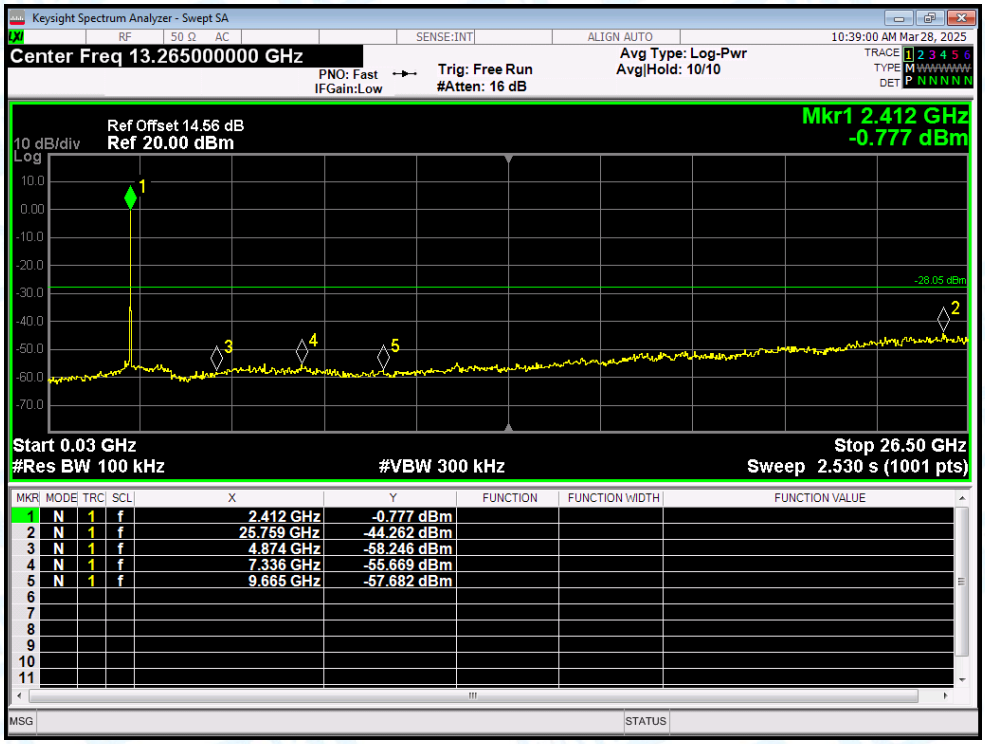

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.412 GHz	-0.777 dBm			
2	N	1	f	25.759 GHz	-44.262 dBm			
3	N	1	f	4.874 GHz	-58.246 dBm			
4	N	1	f	7.336 GHz	-55.669 dBm			
5	N	1	f	9.665 GHz	-57.682 dBm			
6								
7								
8								
9								
10								
11								

Tx. Spurious NVNT n(HT20) 2437MHz Ant1 Ref

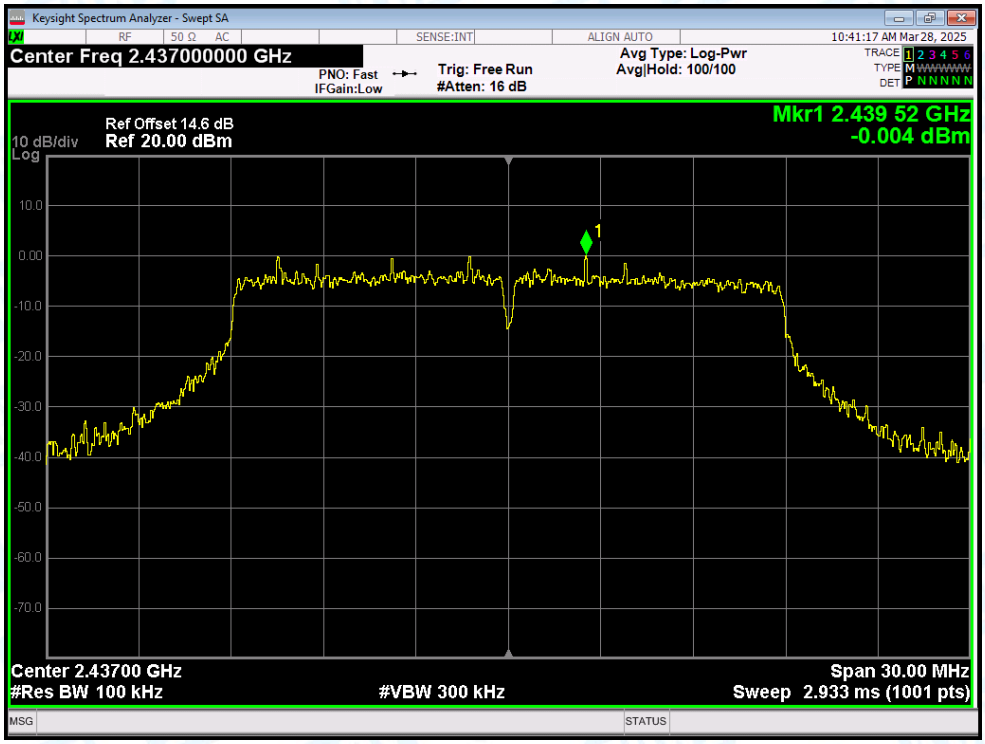

Tx. Spurious NVNT n(HT20) 2437MHz Ant1 Emission

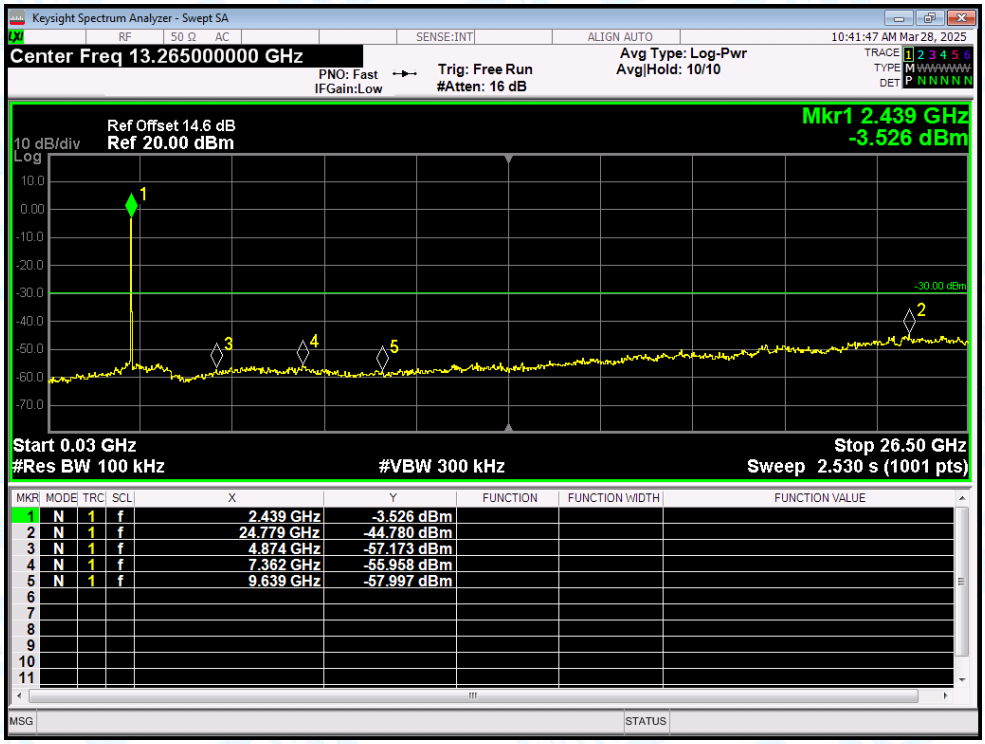

Tx. Spurious NVNT n(HT20) 2462MHz Ant1 Ref

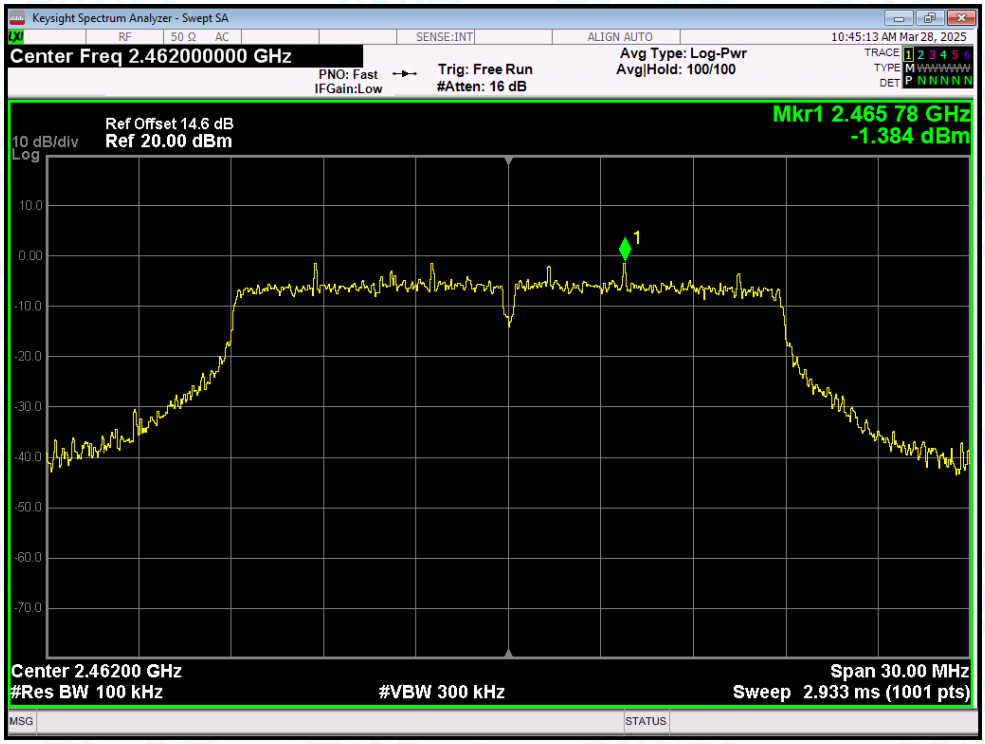

Tx. Spurious NVNT n(HT20) 2462MHz Ant1 Emission

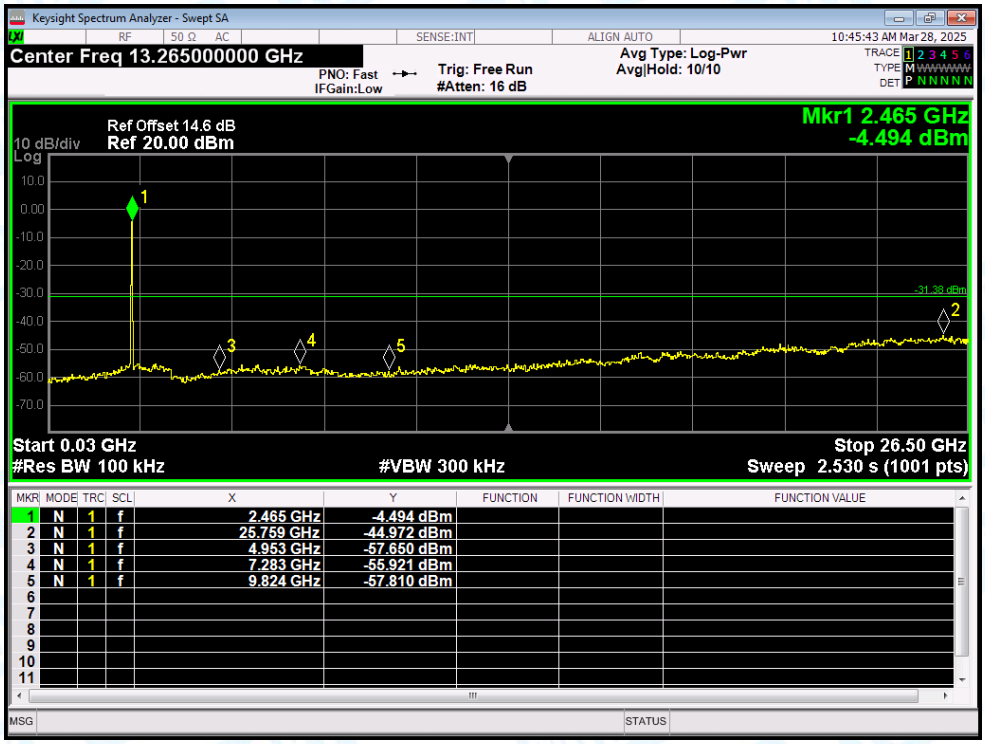

8.Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	b	2412	Ant1	2310	-48.65	2.54	-	49.15	Peak	74	Pass
NVNT	b	2412	Ant1	2310	-55.26	2.54	0.05	42.59	Average	54	Pass
NVNT	b	2412	Ant1	2368.032	-41.54	2.54	-	56.26	Peak	74	Pass
NVNT	b	2412	Ant1	2386.518	-48.71	2.54	0.05	49.14	Average	54	Pass
NVNT	b	2412	Ant1	2390	-44.02	2.54	-	53.78	Peak	74	Pass
NVNT	b	2412	Ant1	2390	-52.51	2.54	0.05	45.34	Average	54	Pass
NVNT	b	2462	Ant1	2483.5	-46.48	2.54	-	51.32	Peak	74	Pass
NVNT	b	2462	Ant1	2483.5	-52.48	2.54	0.05	45.37	Average	54	Pass
NVNT	b	2462	Ant1	2488.075	-43.38	2.54	-	54.42	Peak	74	Pass
NVNT	b	2462	Ant1	2487.386	-49.95	2.54	0.05	47.9	Average	54	Pass
NVNT	b	2462	Ant1	2500	-49.7	2.54	-	48.1	Peak	74	Pass
NVNT	b	2462	Ant1	2500	-57.57	2.54	0.05	40.28	Average	54	Pass
NVNT	g	2412	Ant1	2310	-49.79	2.54	-	48.01	Peak	74	Pass
NVNT	g	2412	Ant1	2310	-57.18	2.54	0.26	40.88	Average	54	Pass
NVNT	g	2412	Ant1	2389.443	-30.04	2.54	-	67.76	Peak	74	Pass
NVNT	g	2412	Ant1	2388.975	-44.49	2.54	0.26	53.57	Average	54	Pass
NVNT	g	2412	Ant1	2390	-31.6	2.54	-	66.2	Peak	74	Pass
NVNT	g	2412	Ant1	2390	-44.8	2.54	0.26	53.26	Average	54	Pass
NVNT	g	2462	Ant1	2483.5	-35.63	2.54	-	62.17	Peak	74	Pass
NVNT	g	2462	Ant1	2483.5	-47.24	2.54	0.26	50.82	Average	54	Pass
NVNT	g	2462	Ant1	2483.835	-29.18	2.54	-	68.62	Peak	74	Pass
NVNT	g	2462	Ant1	2483.623	-45.82	2.54	0.26	52.24	Average	54	Pass
NVNT	g	2462	Ant1	2500	-47.97	2.54	-	49.83	Peak	74	Pass
NVNT	g	2462	Ant1	2500	-58.42	2.54	0.26	39.64	Average	54	Pass
NVNT	n(HT20)	2412	Ant1	2310	-48.99	2.54	-	48.81	Peak	74	Pass
NVNT	n(HT20)	2412	Ant1	2310	-56.96	2.54	0	40.84	Average	54	Pass
NVNT	n(HT20)	2412	Ant1	2388.975	-28.56	2.54	-	69.24	Peak	74	Pass
NVNT	n(HT20)	2412	Ant1	2389.911	-44.18	2.54	0	53.62	Average	54	Pass
NVNT	n(HT20)	2412	Ant1	2390	-34.49	2.54	-	63.31	Peak	74	Pass
NVNT	n(HT20)	2412	Ant1	2390	-44.06	2.54	0	53.74	Average	54	Pass
NVNT	n(HT20)	2462	Ant1	2483.5	-32.55	2.54	-	65.25	Peak	74	Pass
NVNT	n(HT20)	2462	Ant1	2483.5	-45.81	2.54	0	51.99	Average	54	Pass
NVNT	n(HT20)	2462	Ant1	2484.895	-30.84	2.54	-	66.96	Peak	74	Pass
NVNT	n(HT20)	2462	Ant1	2484.1	-45.25	2.54	0	52.55	Average	54	Pass
NVNT	n(HT20)	2462	Ant1	2500	-48.41	2.54	-	49.39	Peak	74	Pass
NVNT	n(HT20)	2462	Ant1	2500	-57.78	2.54	0	40.02	Average	54	Pass

Test Graphs

Restrict Band NVNT b 2412MHz Ant1 Peak

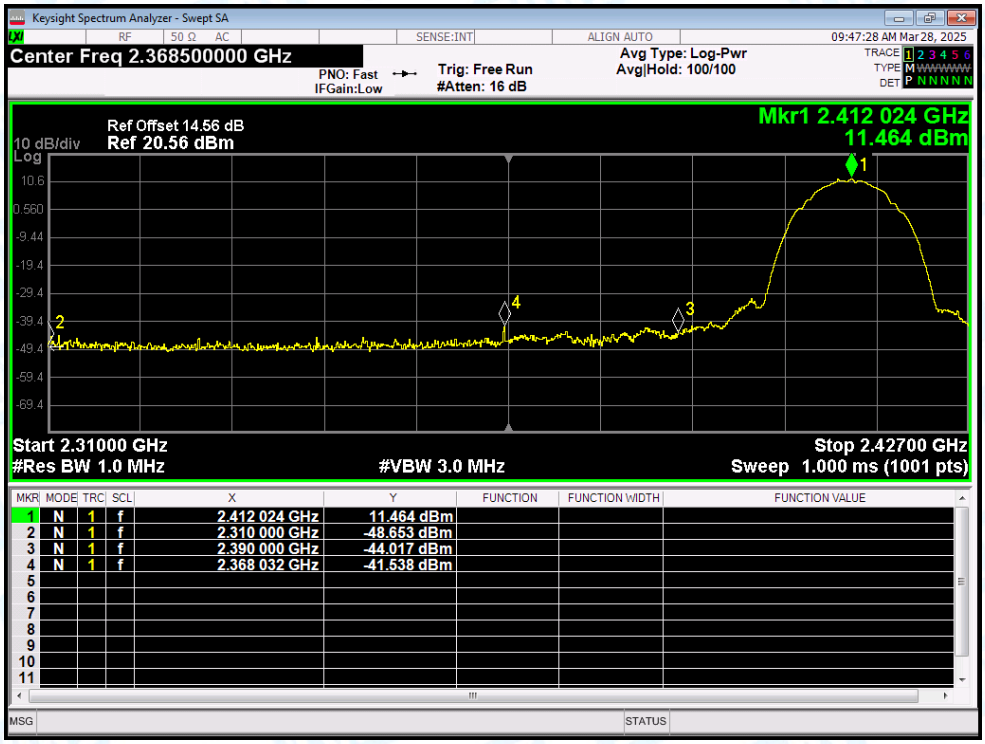

Restrict Band NVNT b 2412MHz Ant1 Average

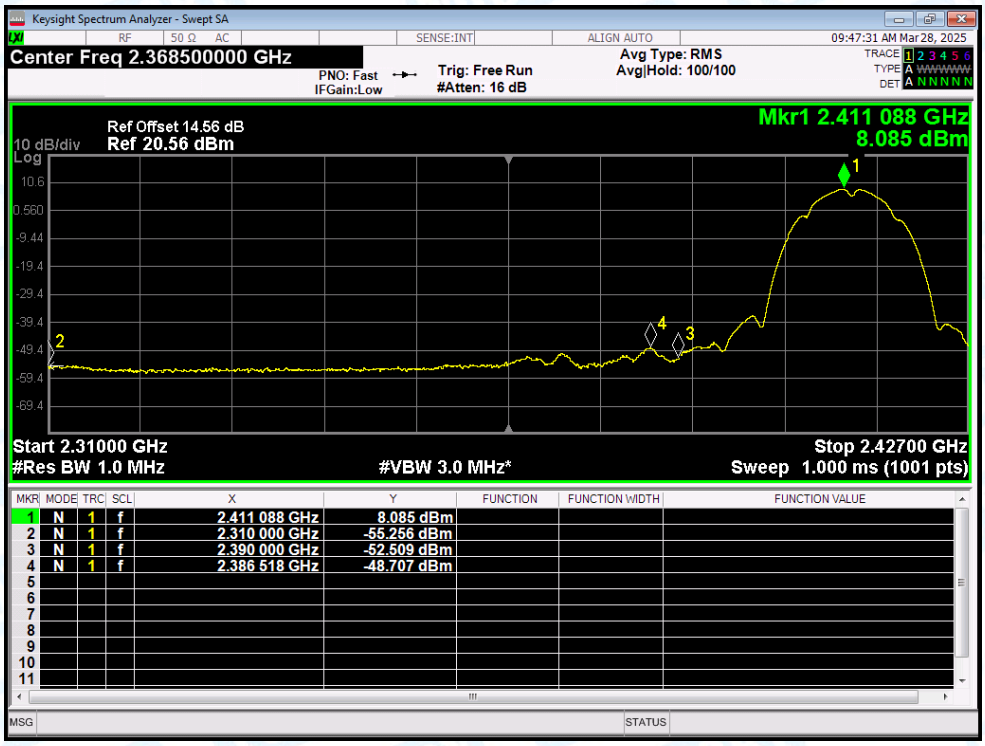

Restrict Band NVNT b 2462MHz Ant1 Peak

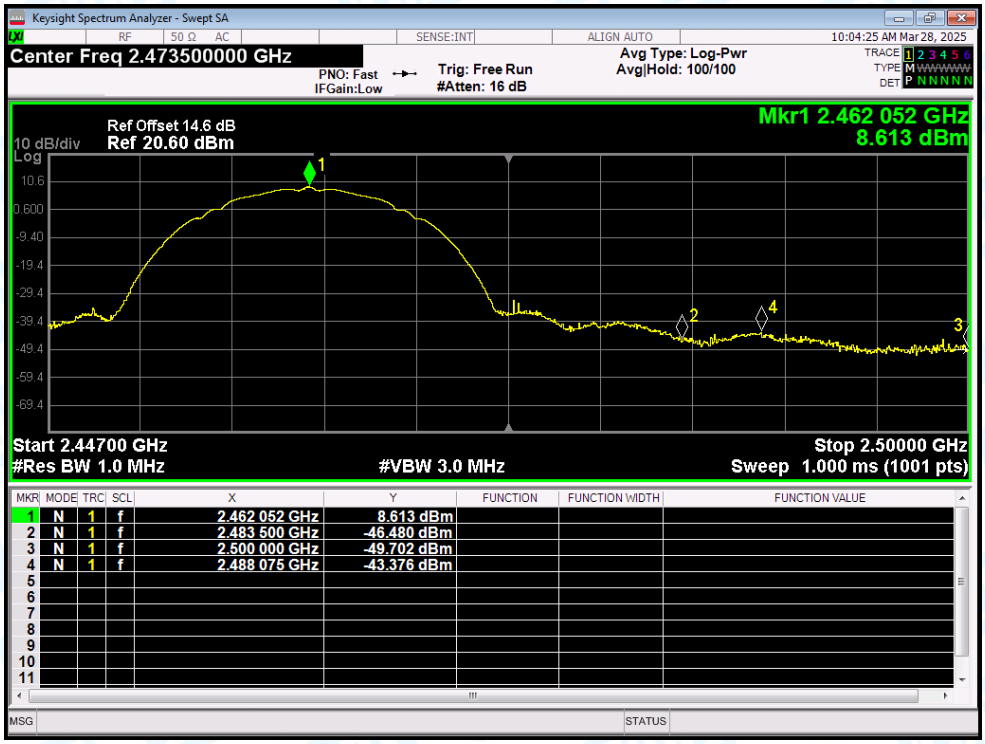

Restrict Band NVNT b 2462MHz Ant1 Average

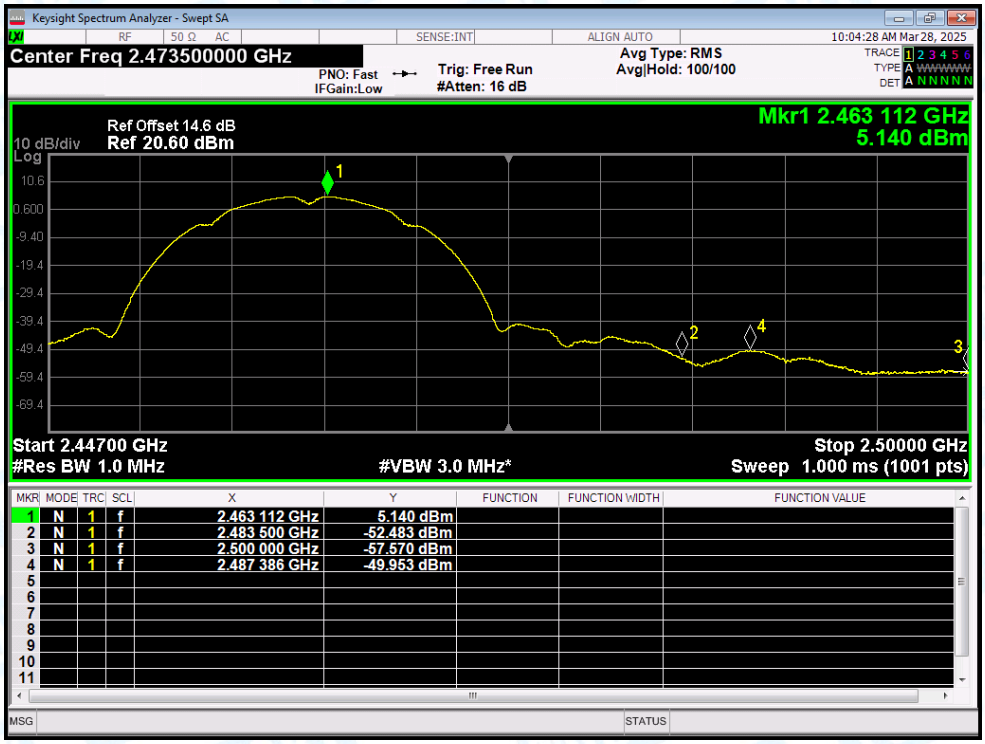

Restrict Band NVNT g 2412MHz Ant1 Peak

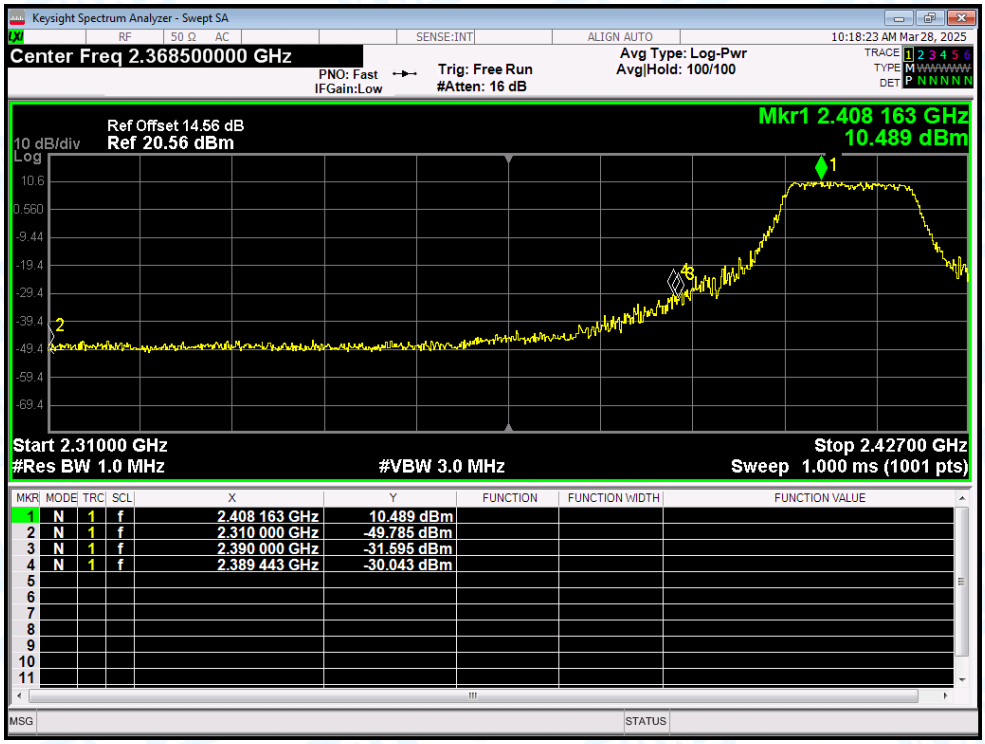

Restrict Band NVNT g 2412MHz Ant1 Average

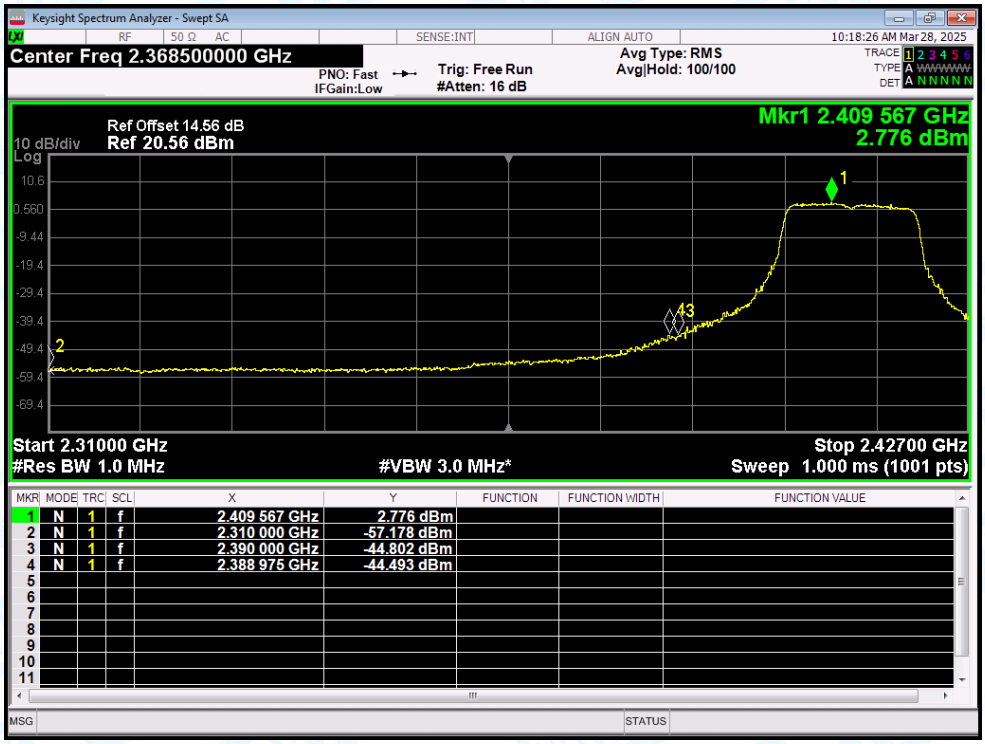

Restrict Band NVNT g 2462MHz Ant1 Peak

Restrict Band NVNT g 2462MHz Ant1 Average

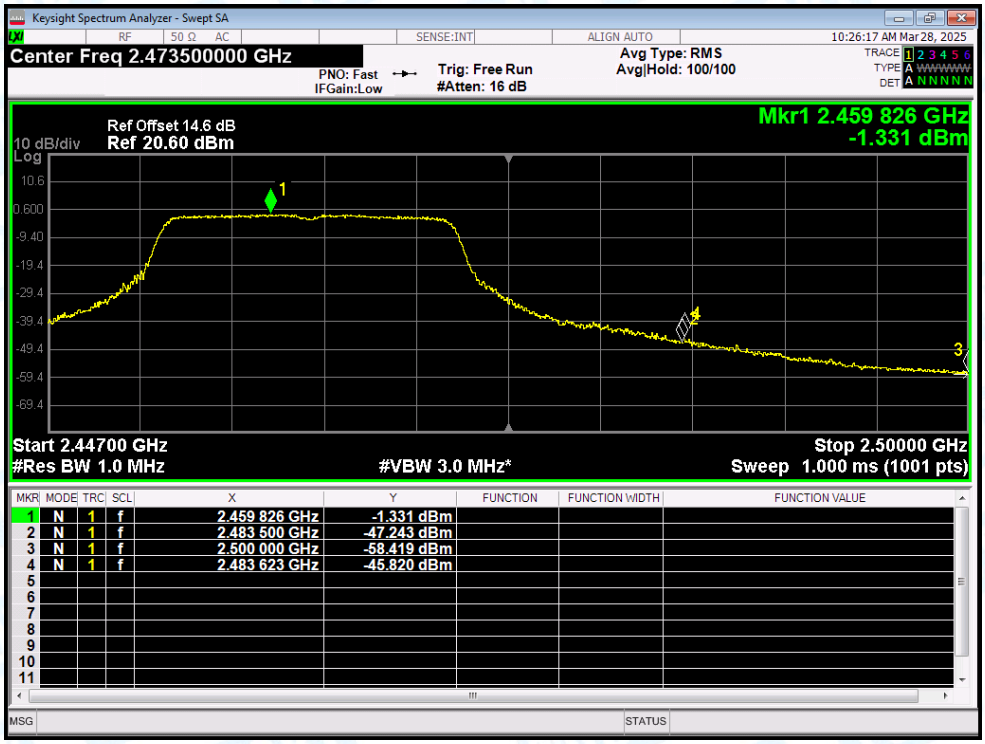

Restrict Band NVNT n(HT20) 2412MHz Ant1 Peak

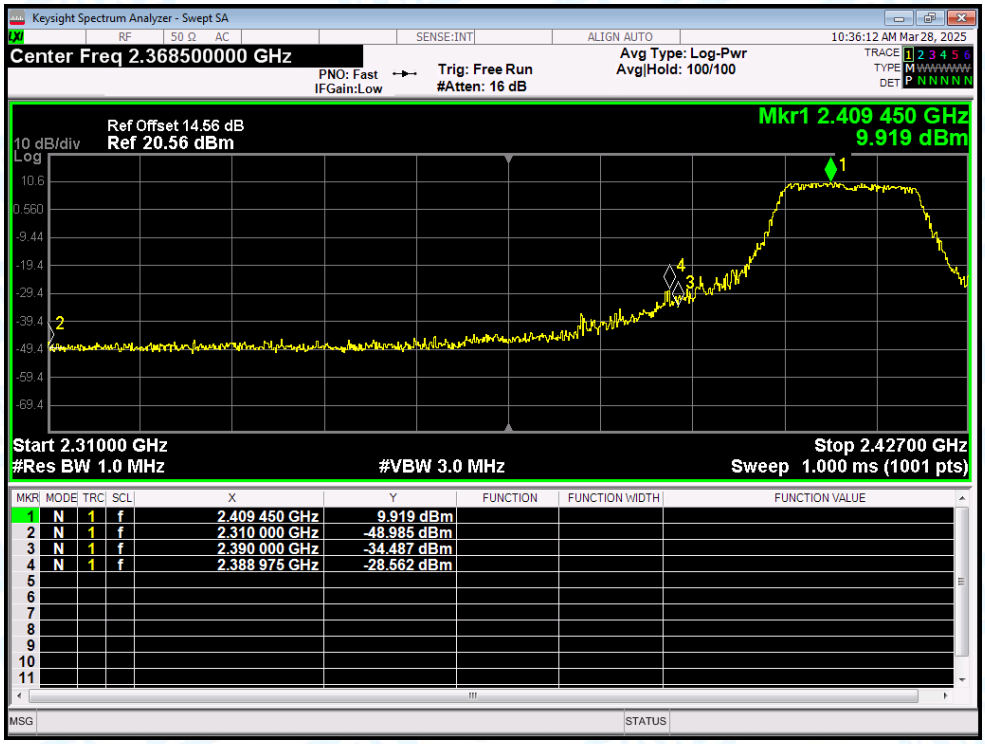

Restrict Band NVNT n(HT20) 2412MHz Ant1 Average

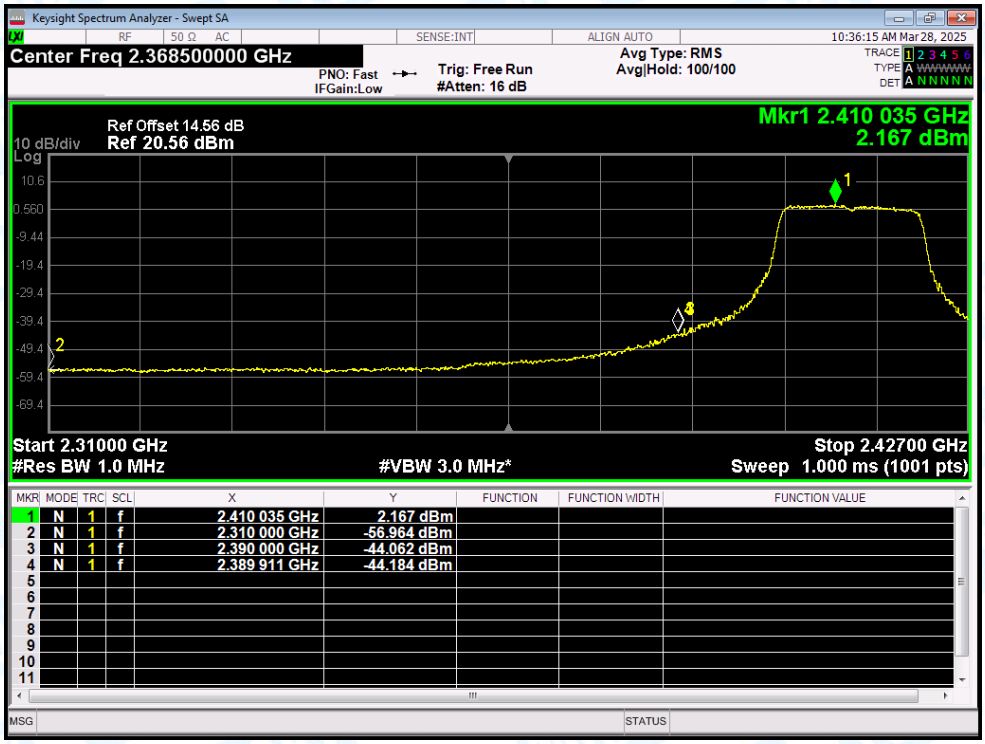

Restrict Band NVNT n(HT20) 2462MHz Ant1 Peak

Restrict Band NVNT n(HT20) 2462MHz Ant1 Average

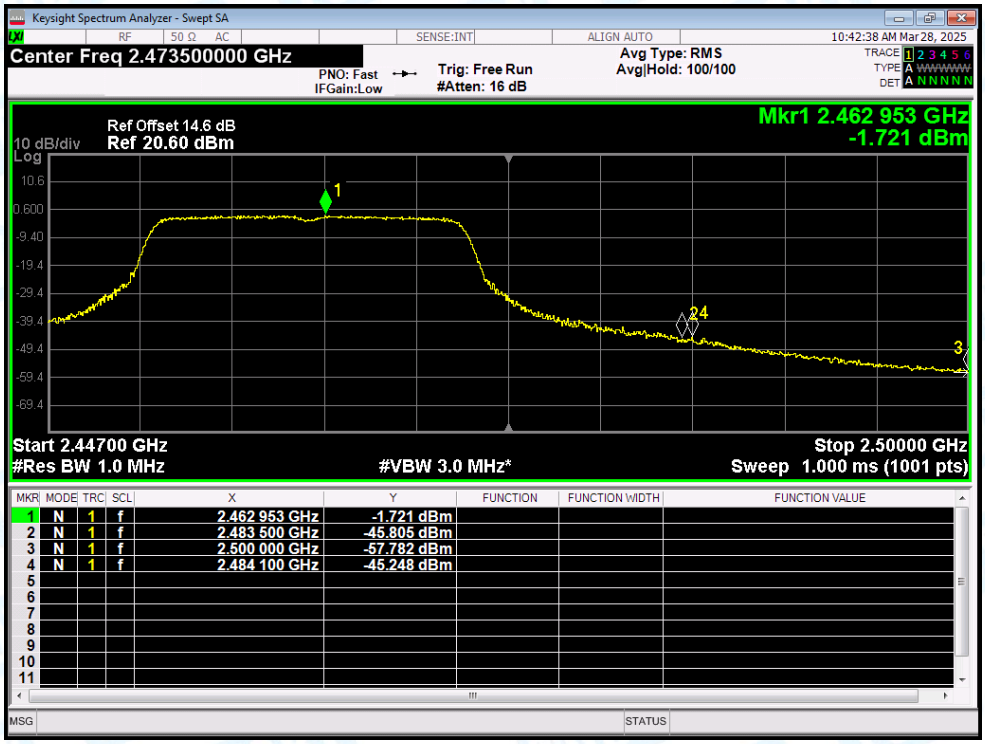

-----END OF REPORT-----