Appendix A

RF Test Data for BT (Conducted Measurement)

Product Name: LAWK City AI Glasses

Test Model: Lawk City

Environmental Conditions

Temperature:	24.1℃
Relative Humidity:	52.7%
ATM Pressure:	100.0 kPa
Test Engineer:	Andre Tan
Supervised by:	Nick Peng

A.1 -20dB Bandwidth

Left eye:

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.960	/	Pass
		2441	DH5	1	0.959	/	Pass
		2480	DH5	1	0.960	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.285	/	Pass
		2441	2DH5	1	1.287	/	Pass
		2480	2DH5	1	1.287	/	Pass
8DPSK	SISO	2402	3DH5	1	1.306	/	Pass
		2441	3DH5	1	1.307	/	Pass
		2480	3DH5	1	1.308	/	Pass

GFSK_DH5_LCH_2402MHz_Ant1_NTNV

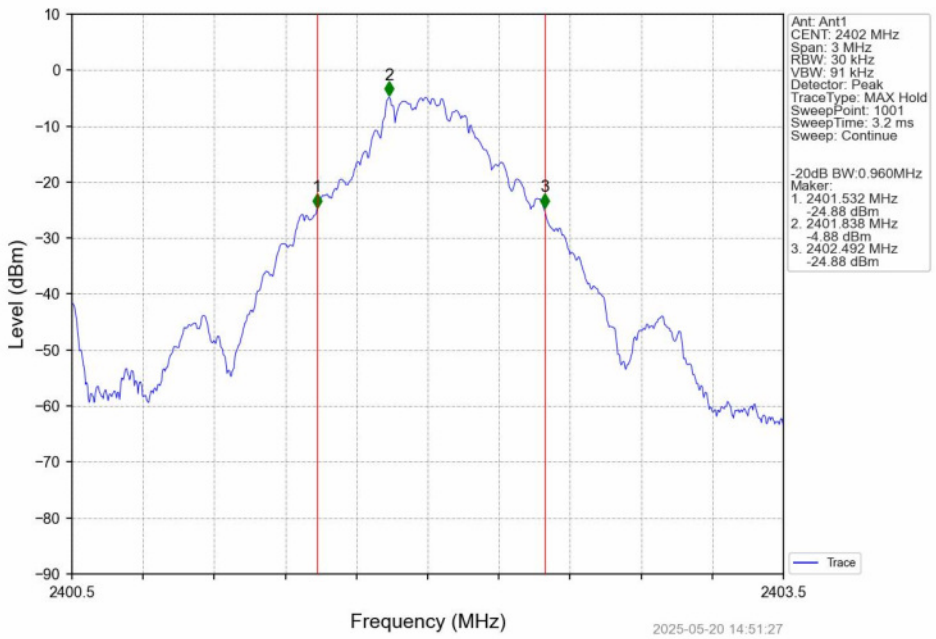

GFSK_DH5_MCH_2441MHz_Ant1_NTNV

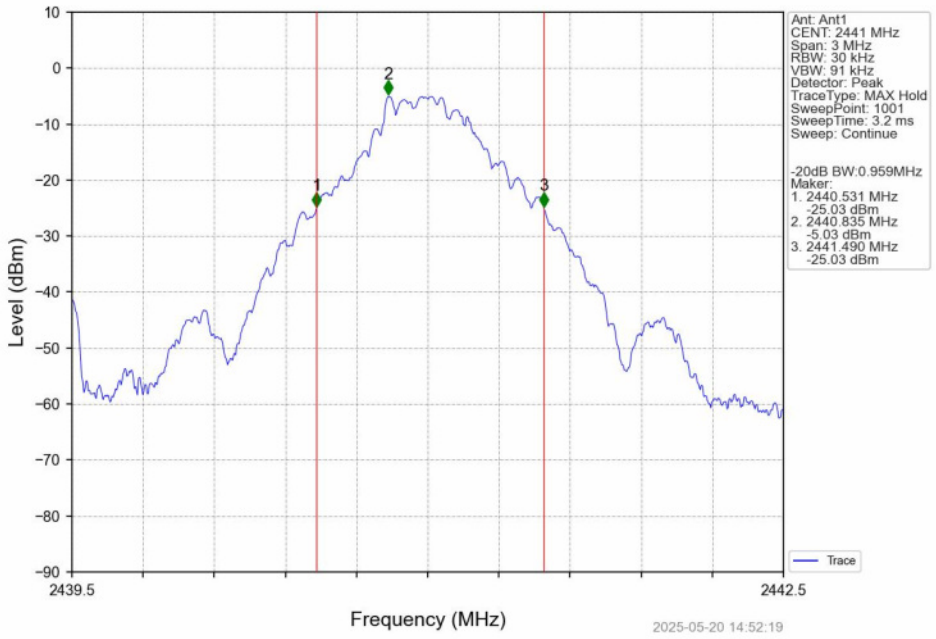

GFSK_DH5_HCH_2480MHz_Ant1_NTNV

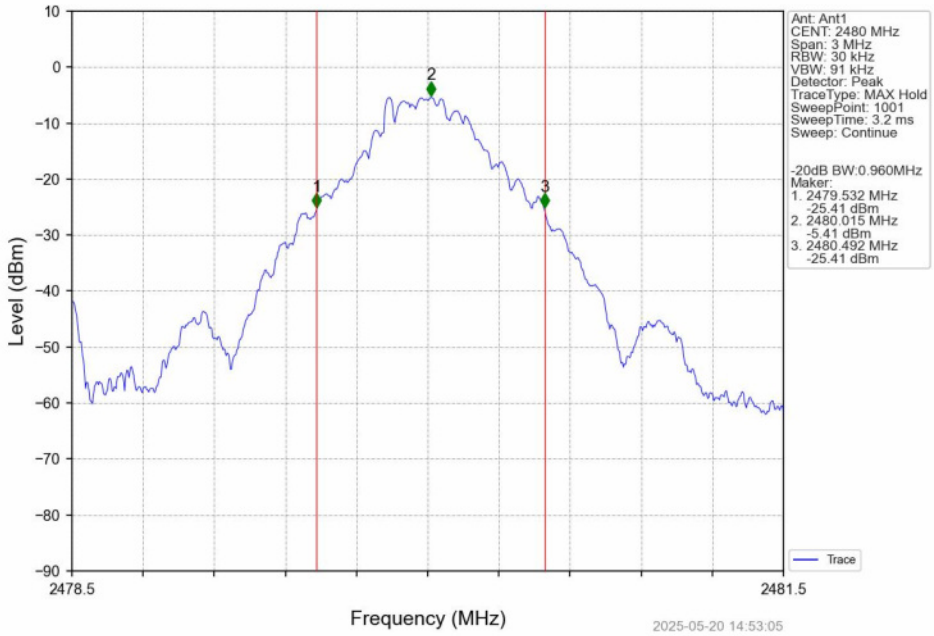

Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

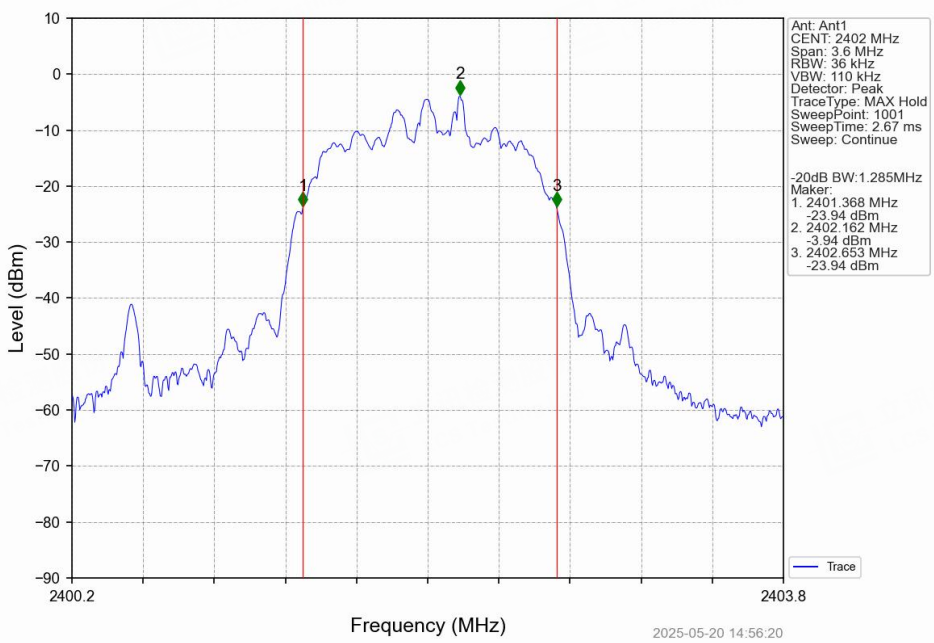

Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

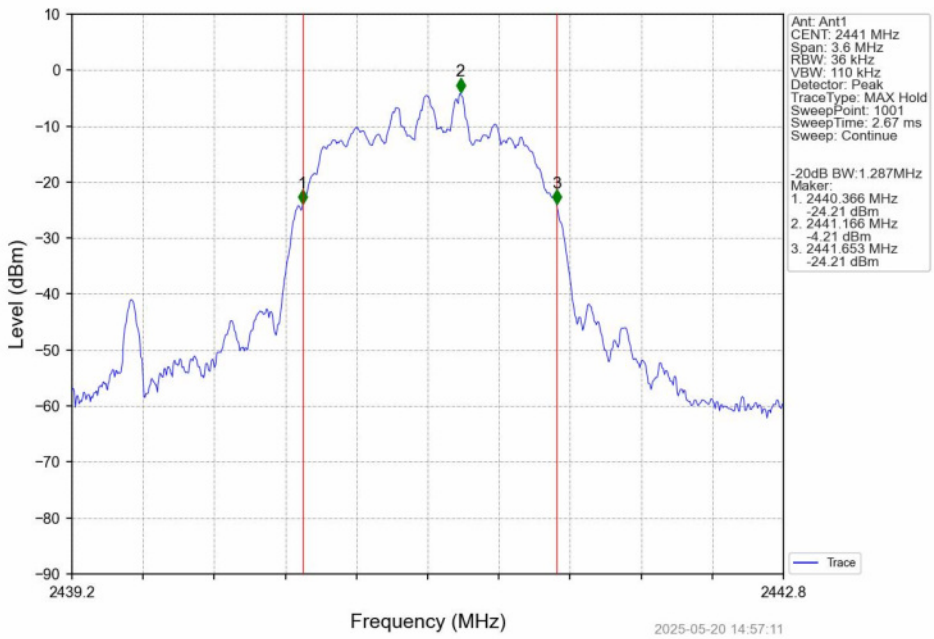

Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

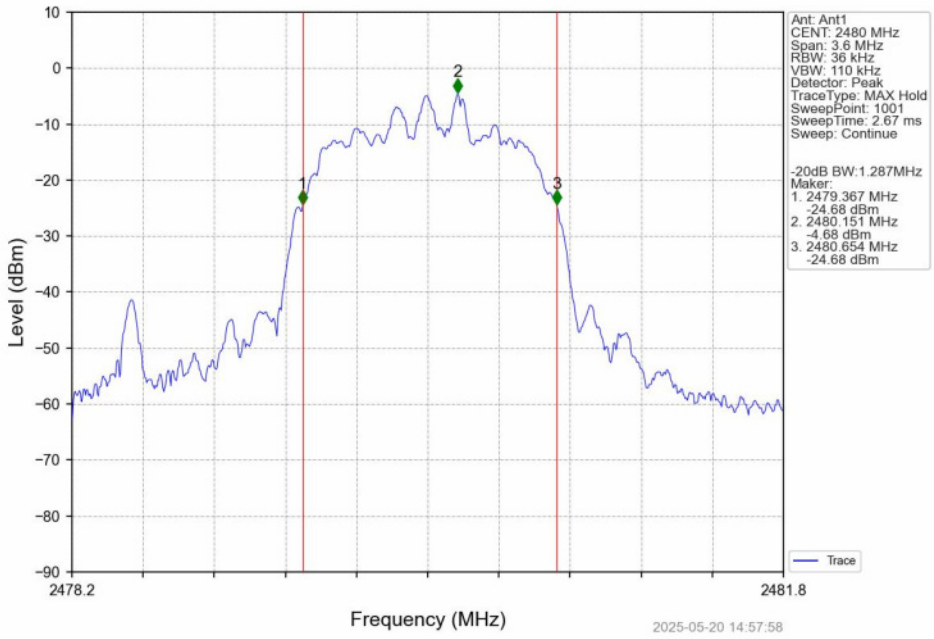

8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

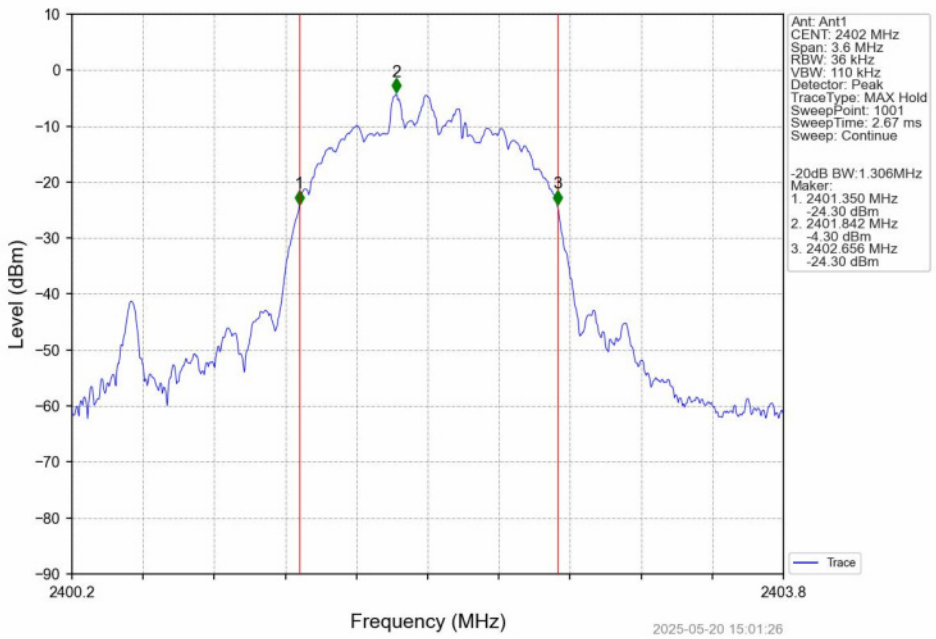

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

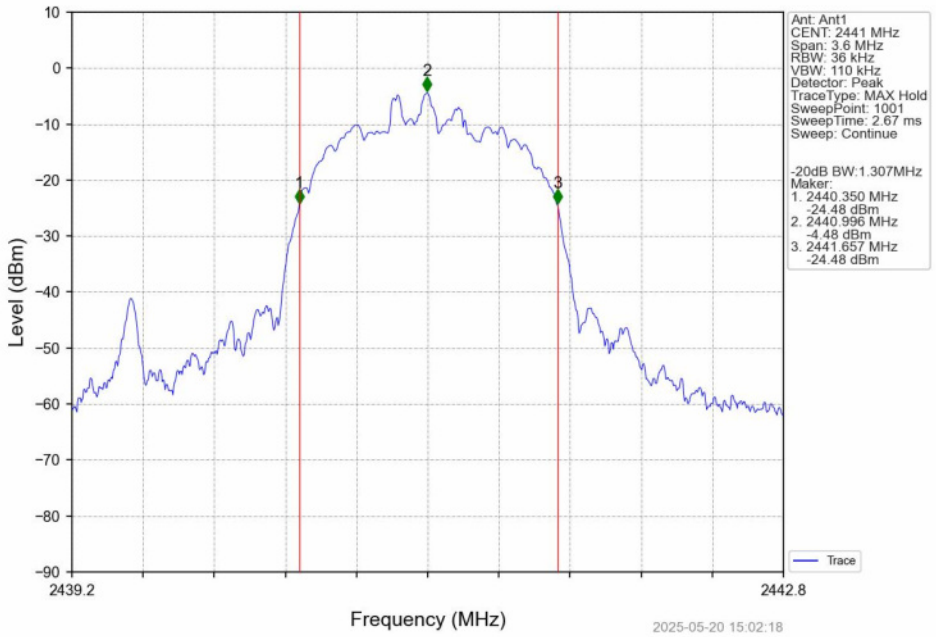

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

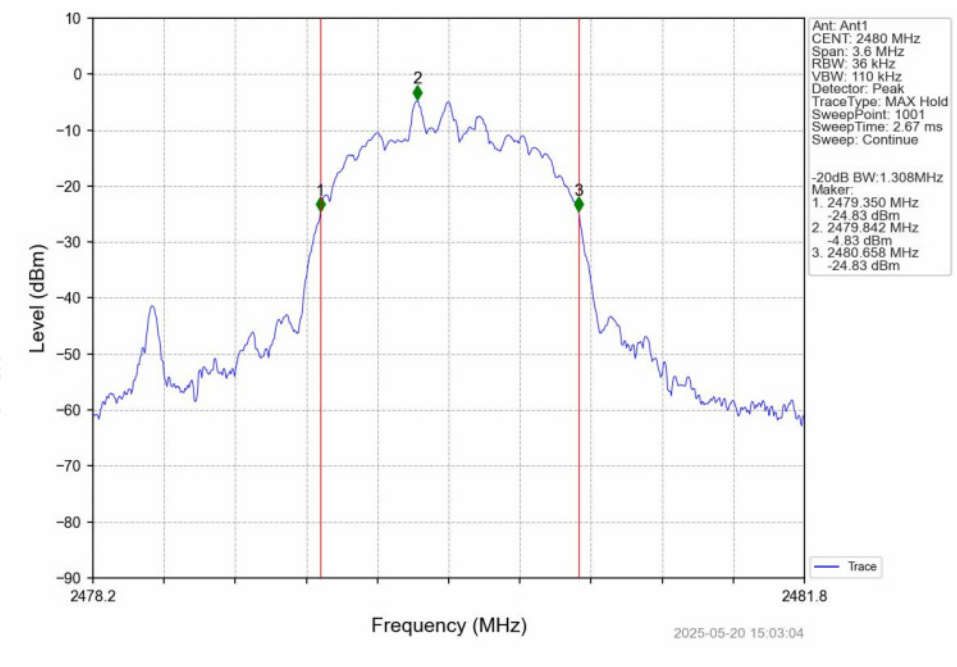

Right eye:

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.954	/	Pass
		2441	DH5	1	0.956	/	Pass
		2480	DH5	1	0.954	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.280	/	Pass
		2441	2DH5	1	1.283	/	Pass
		2480	2DH5	1	1.281	/	Pass
8DPSK	SISO	2402	3DH5	1	1.307	/	Pass
		2441	3DH5	1	1.307	/	Pass
		2480	3DH5	1	1.307	/	Pass

GFSK_DH5_LCH_2402MHz_Ant1_NTNV

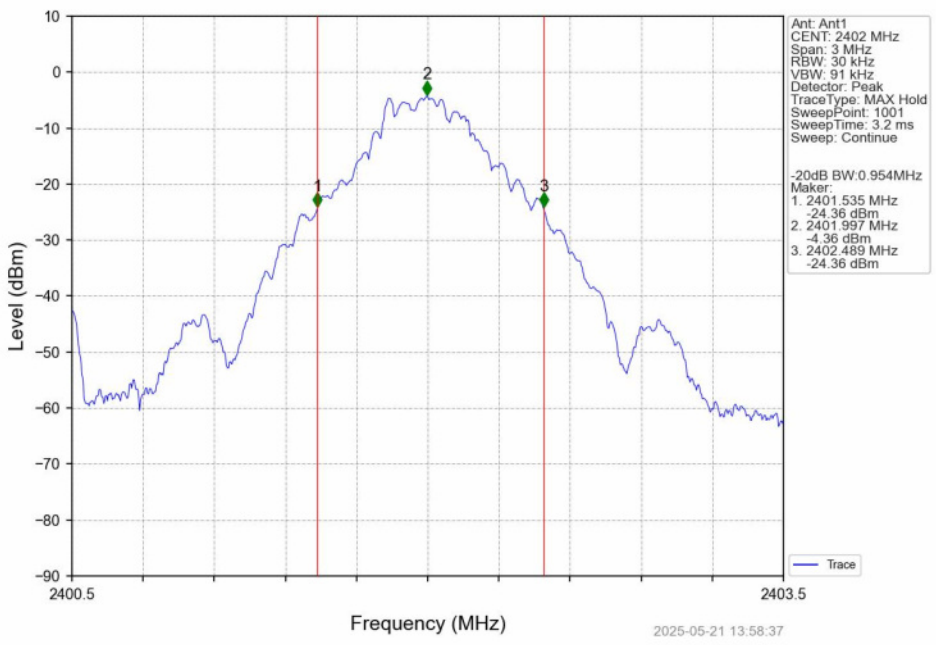

GFSK_DH5_MCH_2441MHz_Ant1_NTNV

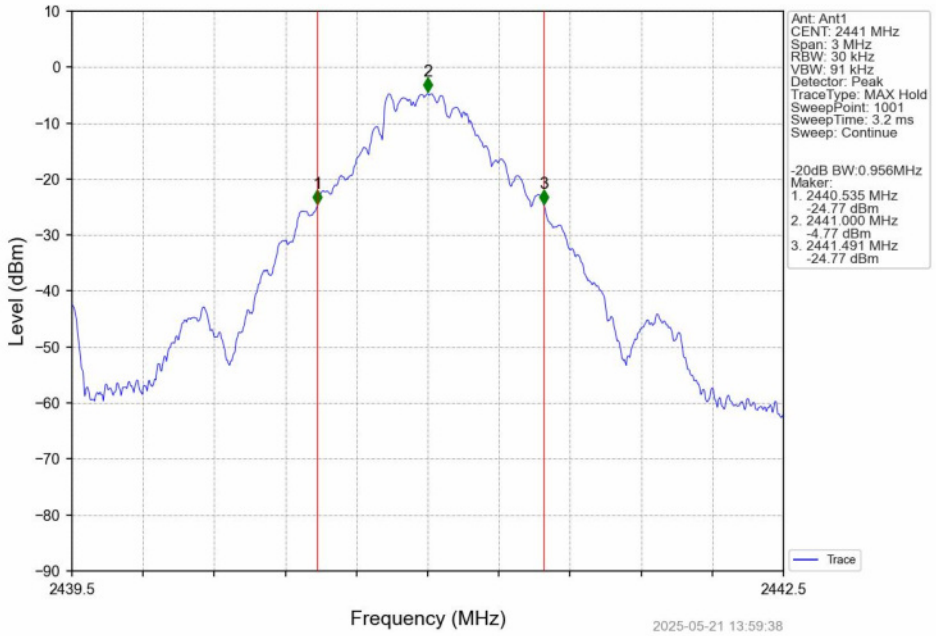

GFSK_DH5_HCH_2480MHz_Ant1_NTNV

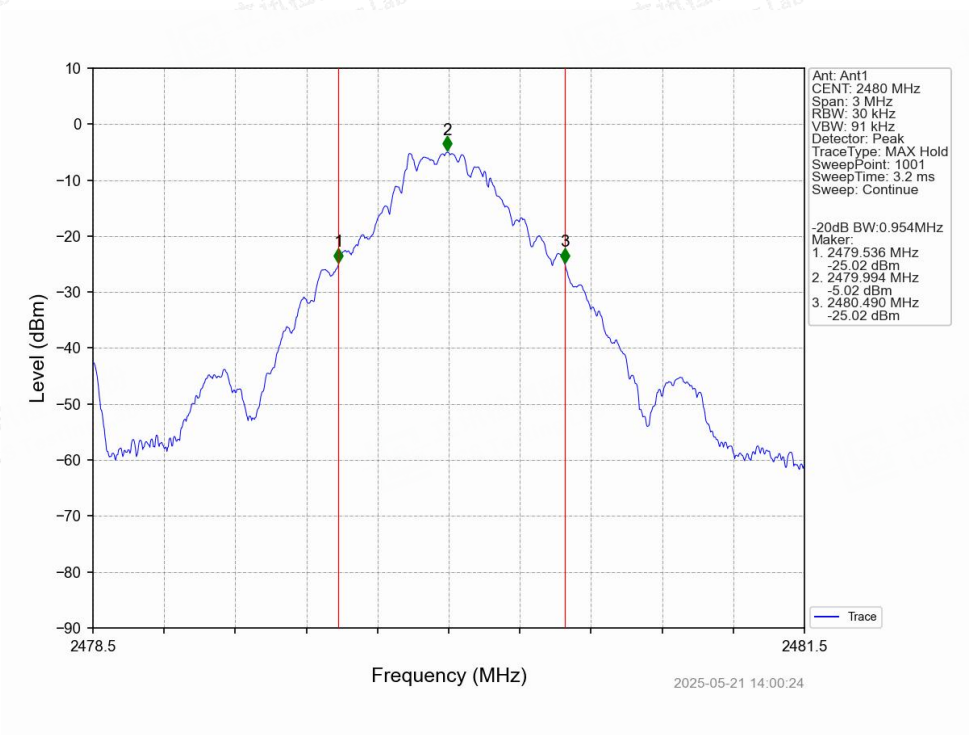

Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

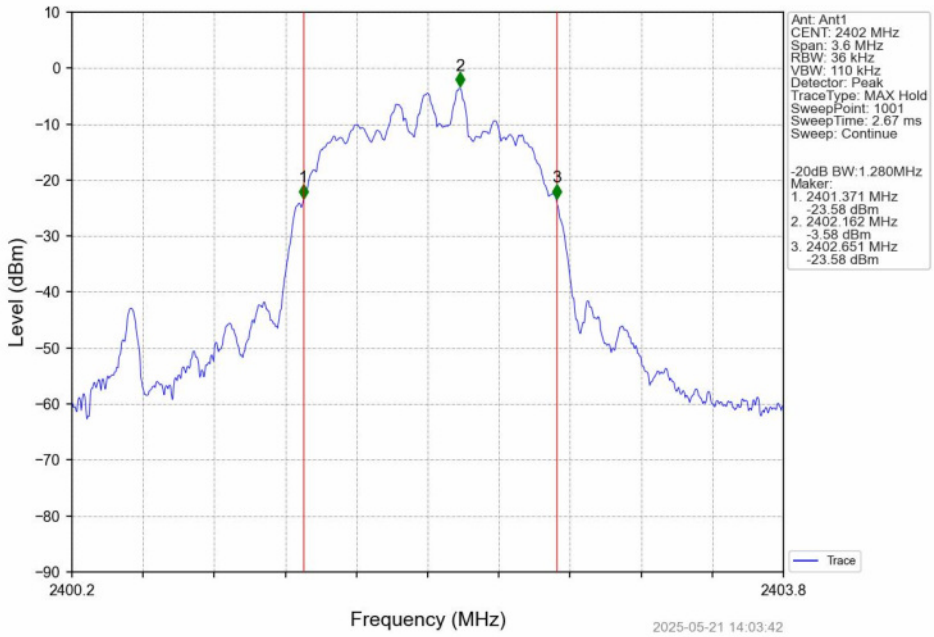

Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

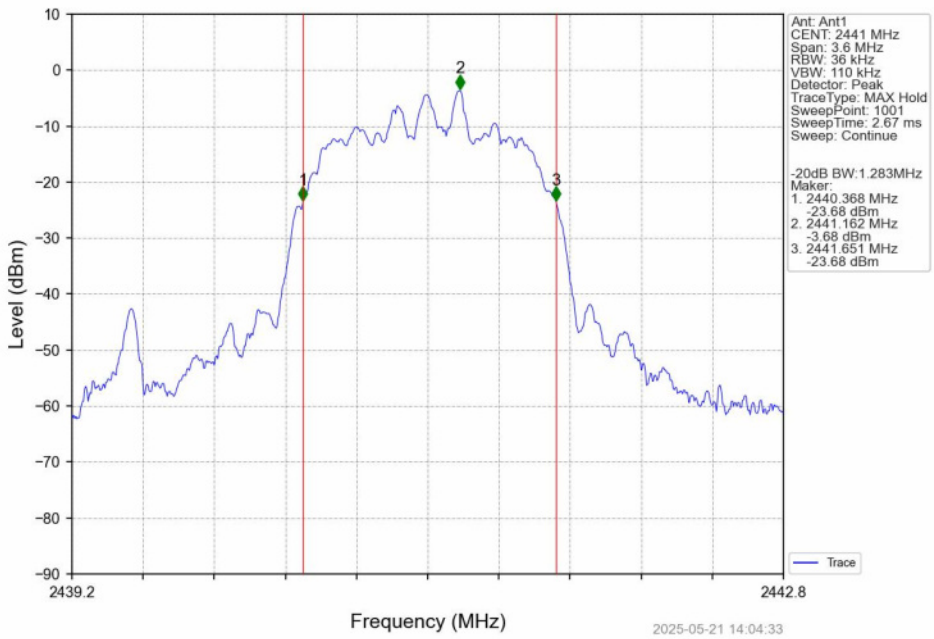

Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

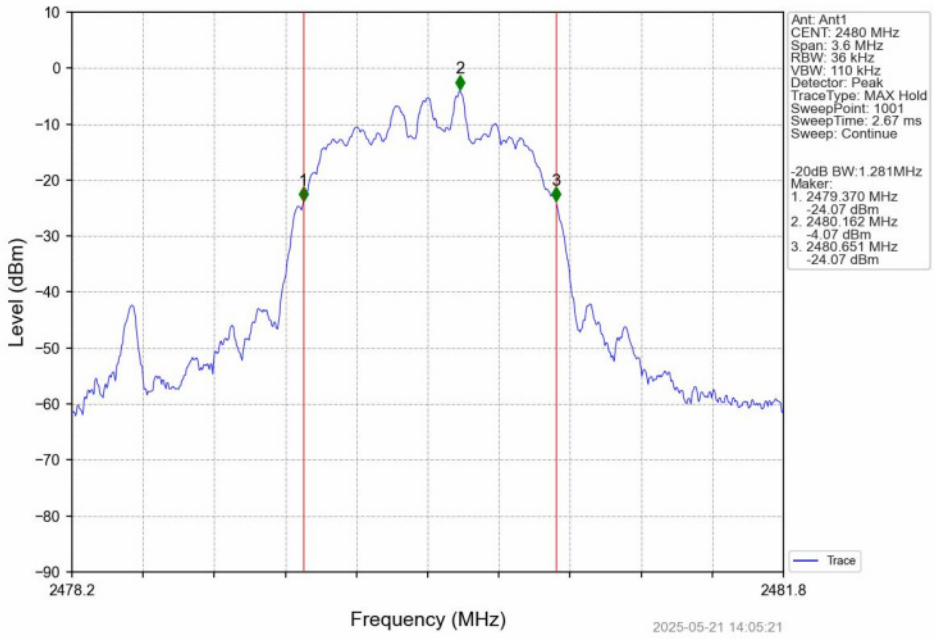

8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

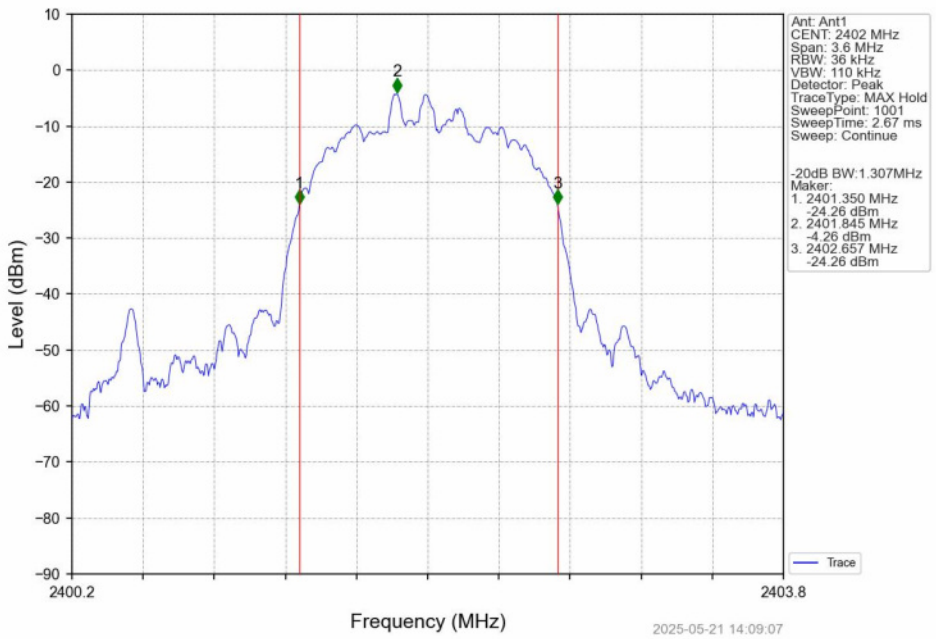

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

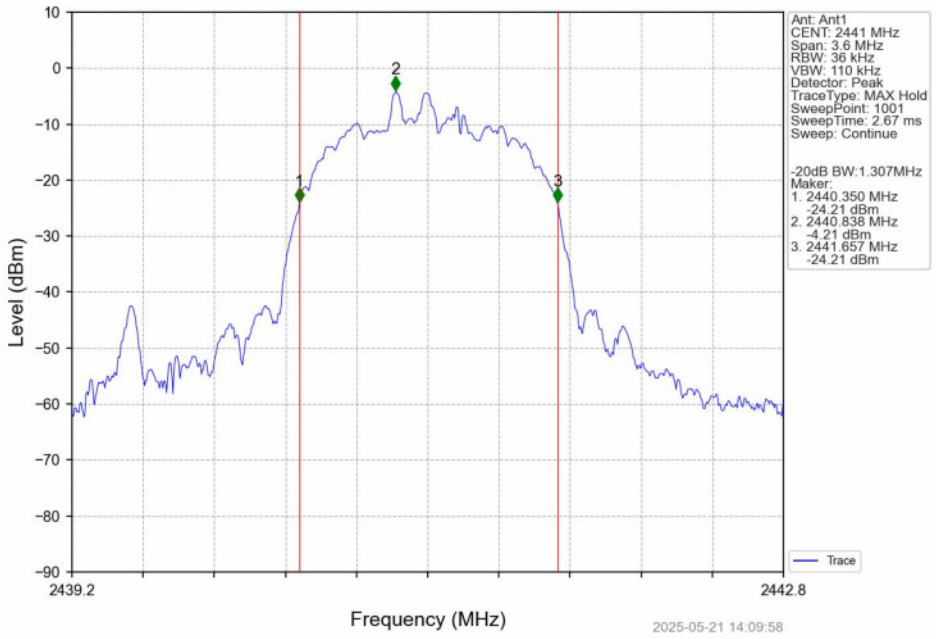

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

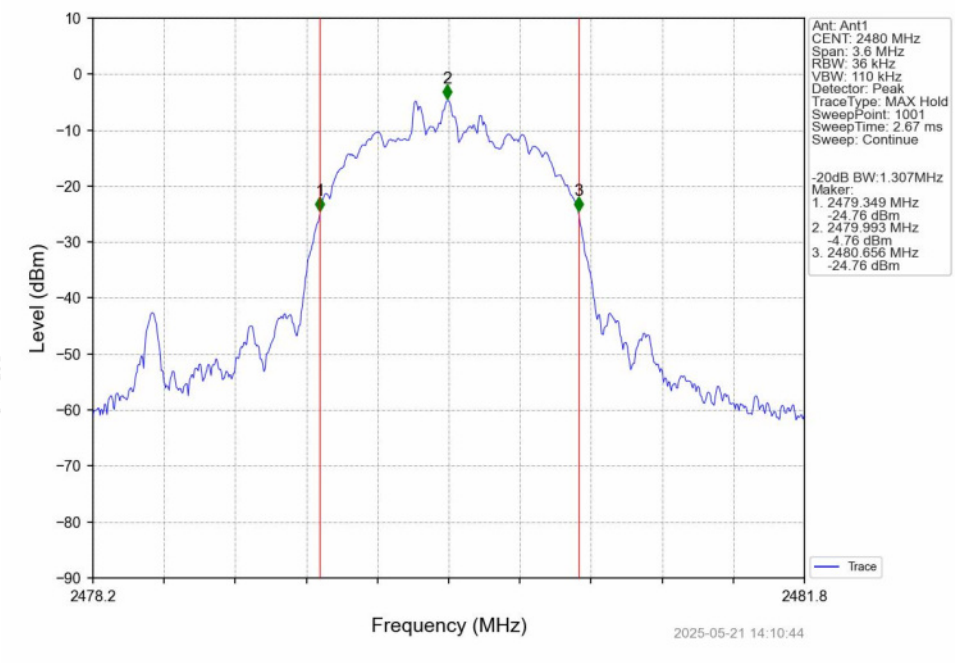

A.2 Maximum Peak Conducted Output Power

Left eye:

Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	-2.45	<=30	Pass
		2441	DH5	-2.55	<=30	Pass
		2480	DH5	-2.96	<=30	Pass
Pi/4DQPSK	SISO	2402	2DH5	-1.47	<=20.97	Pass
		2441	2DH5	-1.58	<=20.97	Pass
		2480	2DH5	-2.00	<=20.97	Pass
8DPSK	SISO	2402	3DH5	-1.09	<=20.97	Pass
		2441	3DH5	-1.20	<=20.97	Pass
		2480	3DH5	-1.63	<=20.97	Pass

GFSK_DH5_LCH_2402MHz_Ant1_NTNV

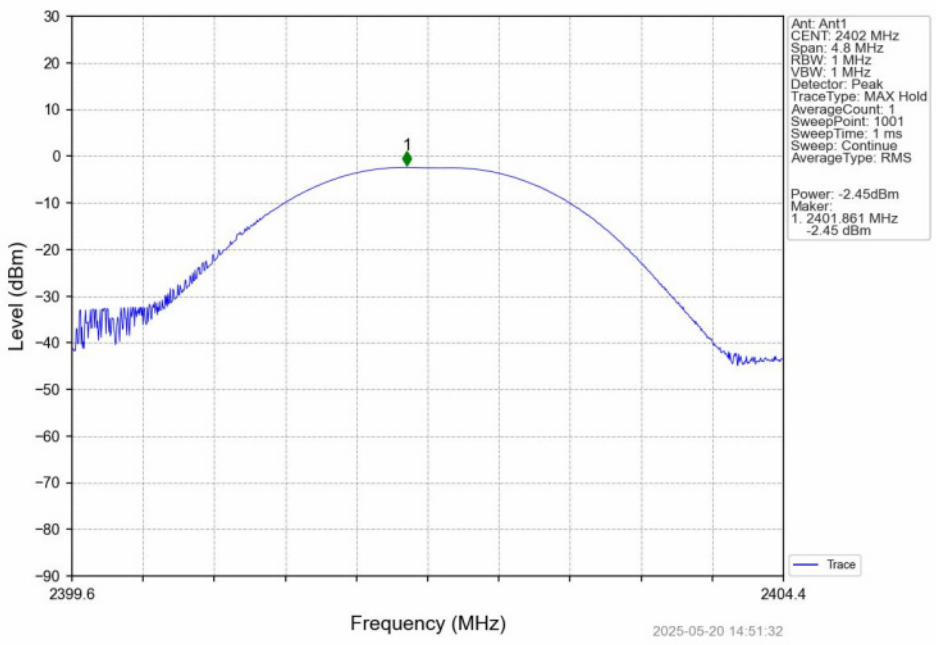

GFSK_DH5_MCH_2441MHz_Ant1_NTNV

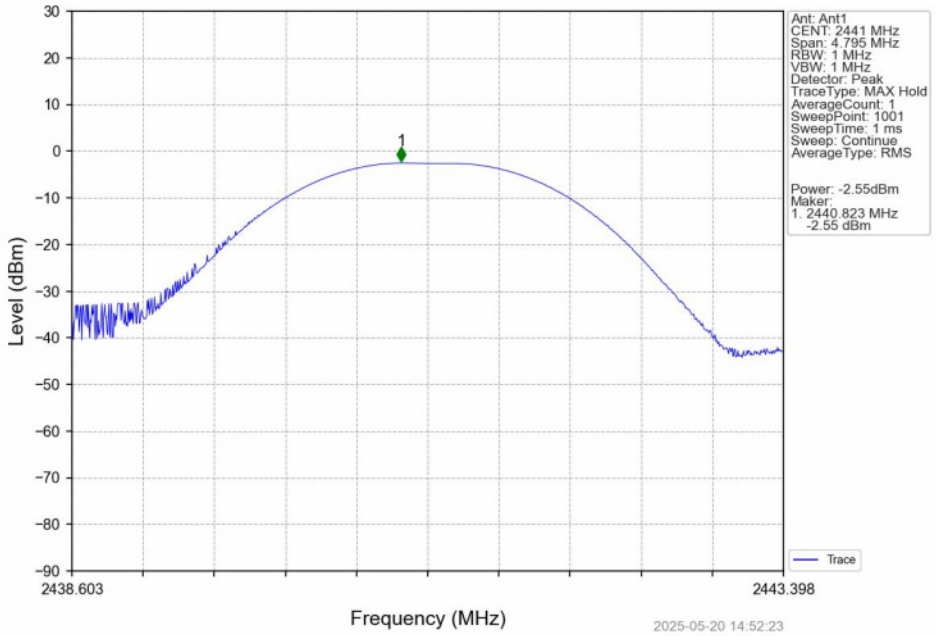

GFSK_DH5_HCH_2480MHz_Ant1_NTNV

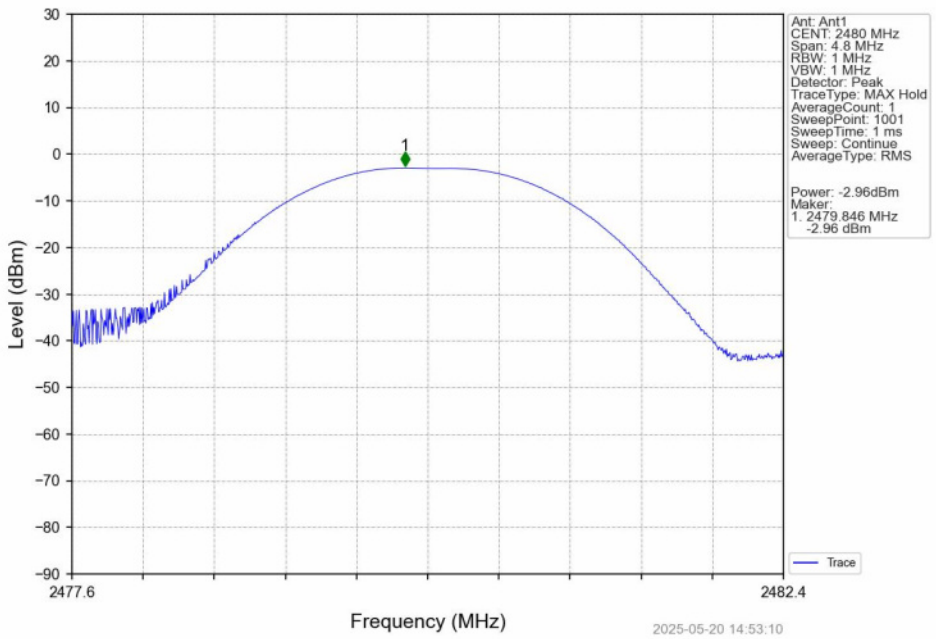

Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

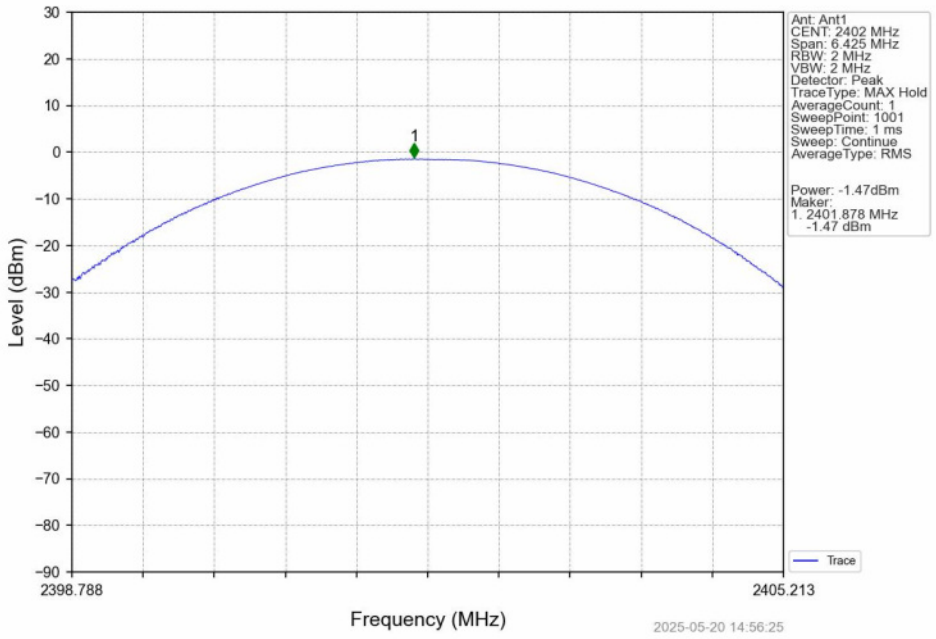

Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

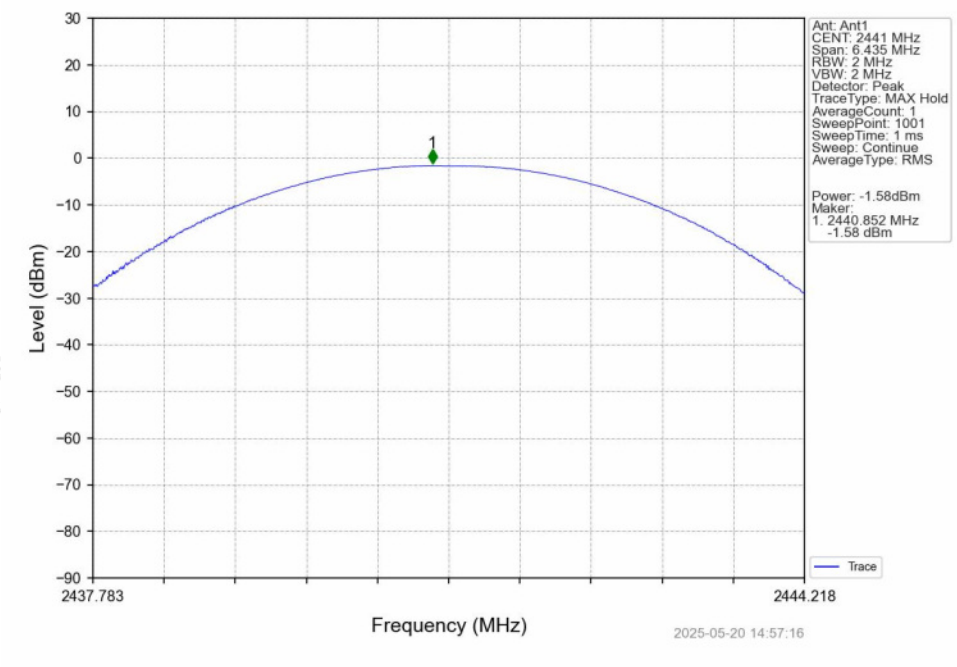

Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

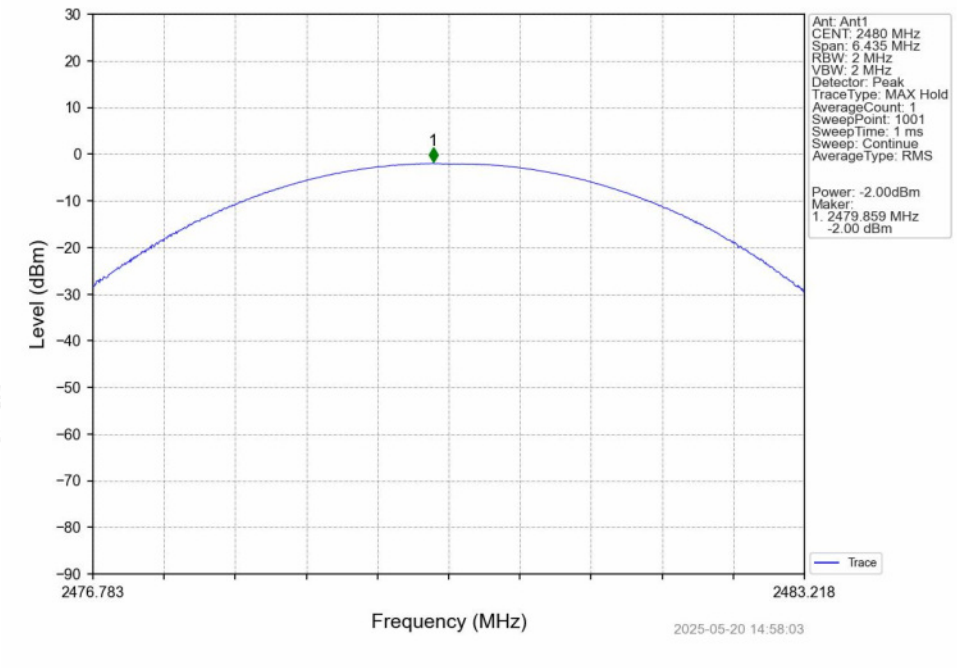

8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

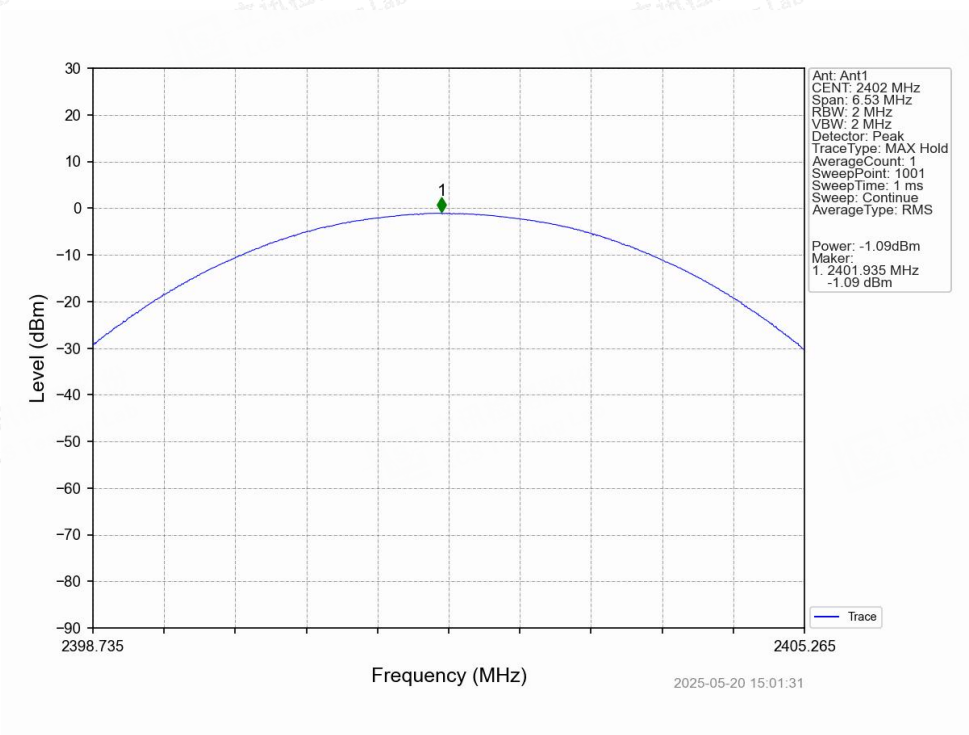

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

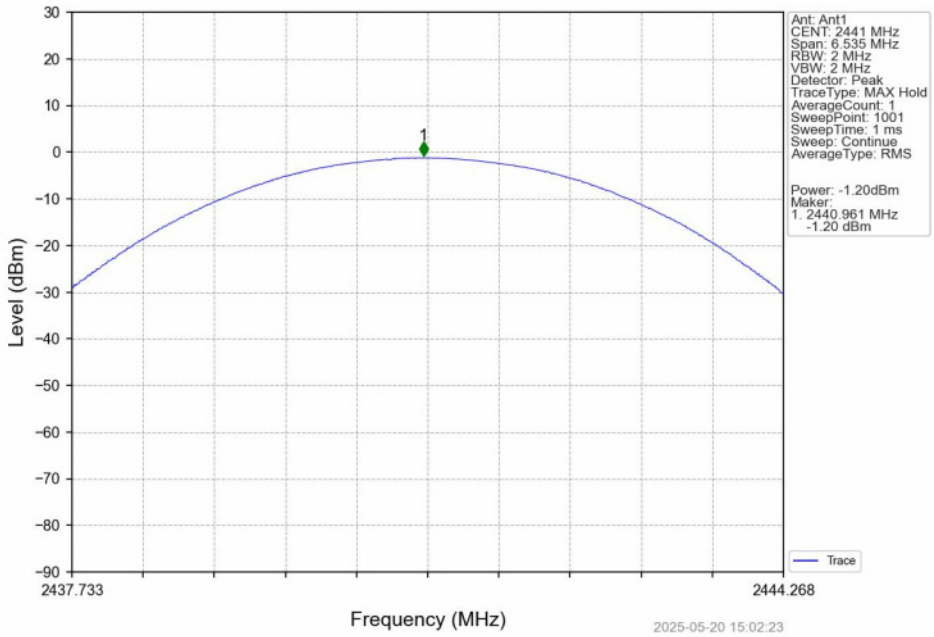

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

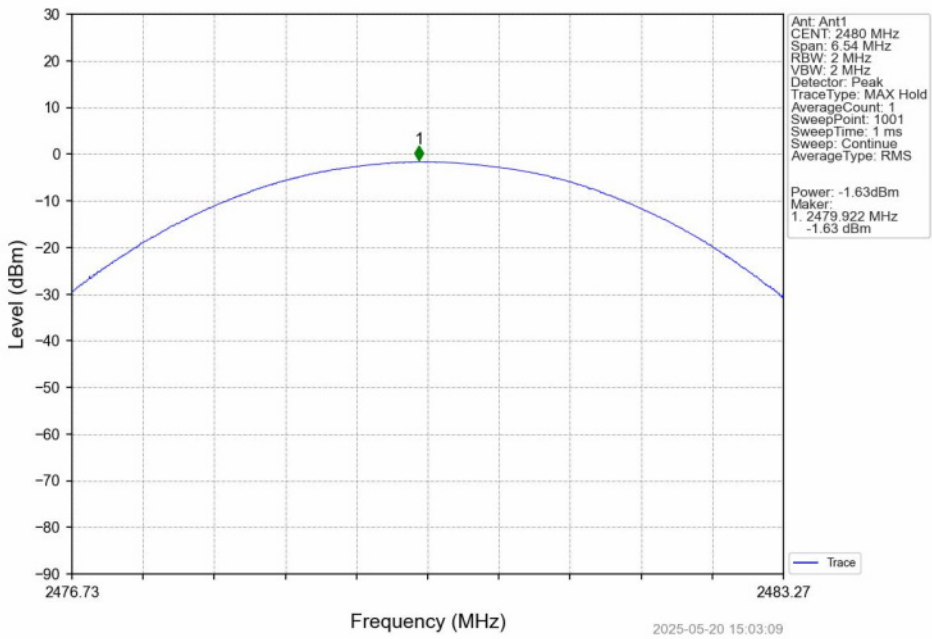

Right eye:

Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	-2.24	<=30	Pass
		2441	DH5	-2.38	<=30	Pass
		2480	DH5	-2.82	<=30	Pass
Pi/4DQPSK	SISO	2402	2DH5	-1.35	<=20.97	Pass
		2441	2DH5	-1.45	<=20.97	Pass
		2480	2DH5	-1.87	<=20.97	Pass
8DPSK	SISO	2402	3DH5	-0.94	<=20.97	Pass
		2441	3DH5	-1.06	<=20.97	Pass
		2480	3DH5	-1.45	<=20.97	Pass

GFSK_DH5_LCH_2402MHz_Ant1_NTNV

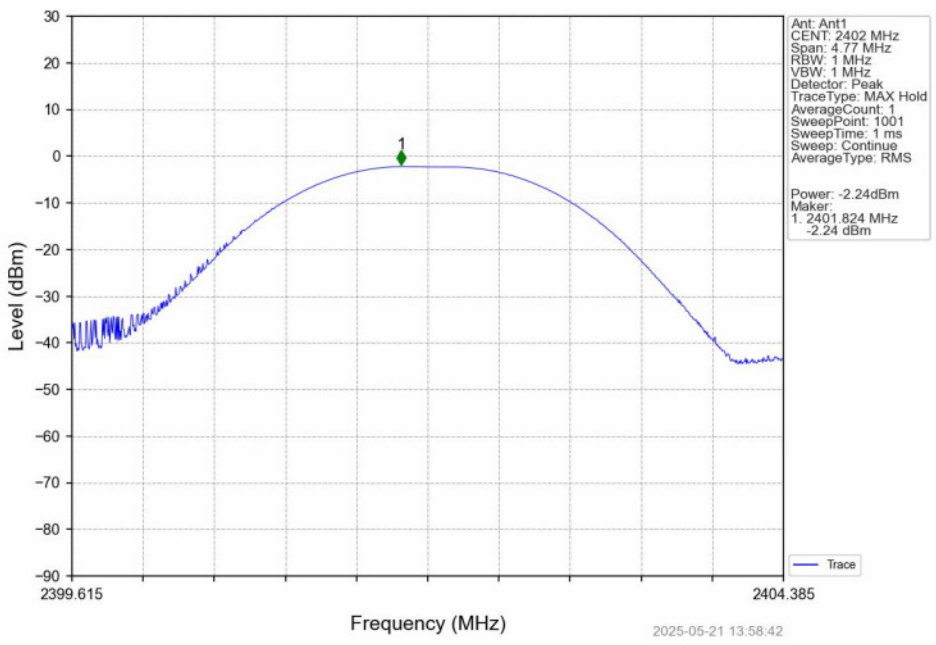

GFSK_DH5_MCH_2441MHz_Ant1_NTNV

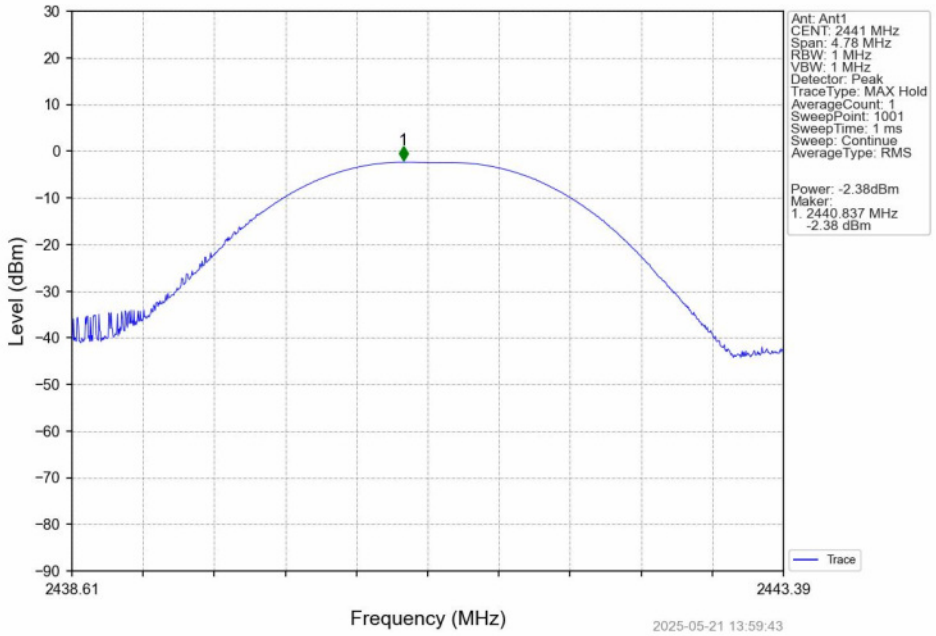

GFSK_DH5_HCH_2480MHz_Ant1_NTNV

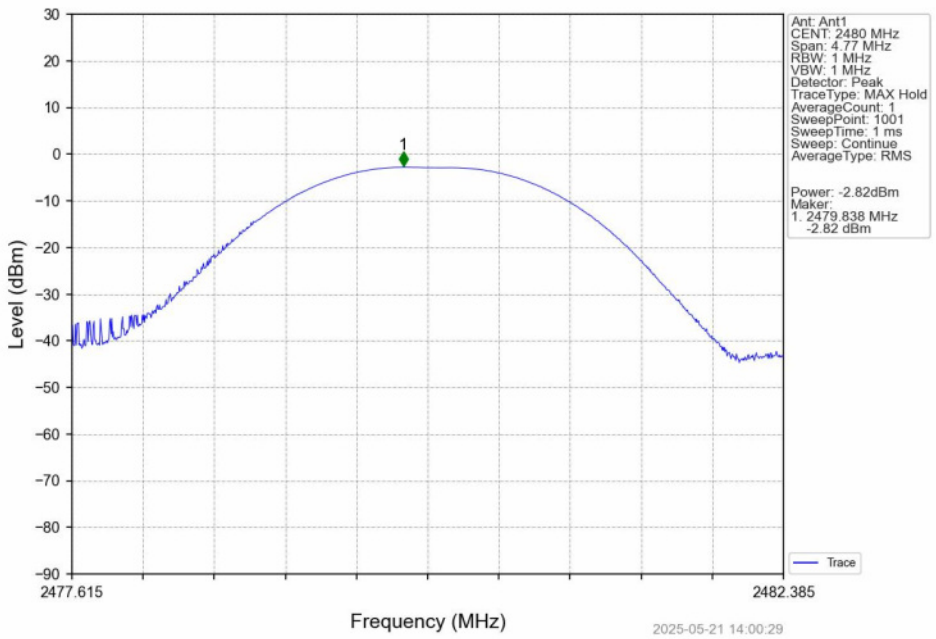

Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

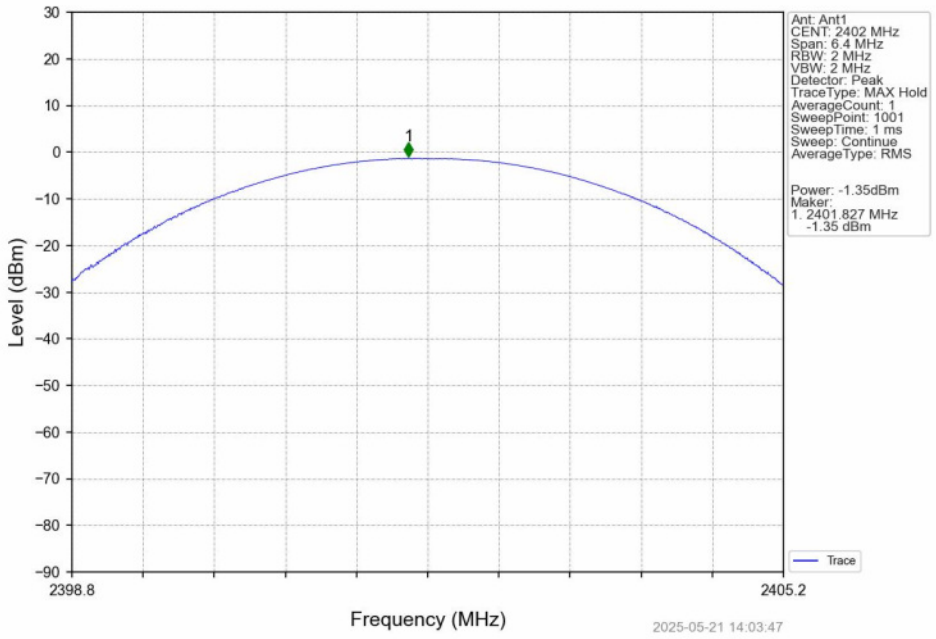

Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

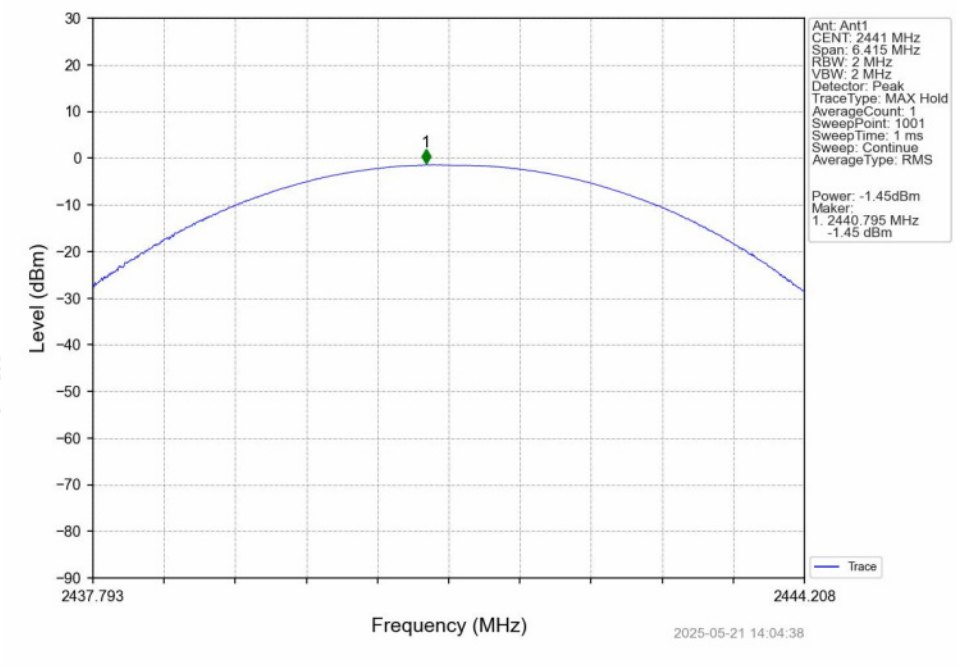

Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

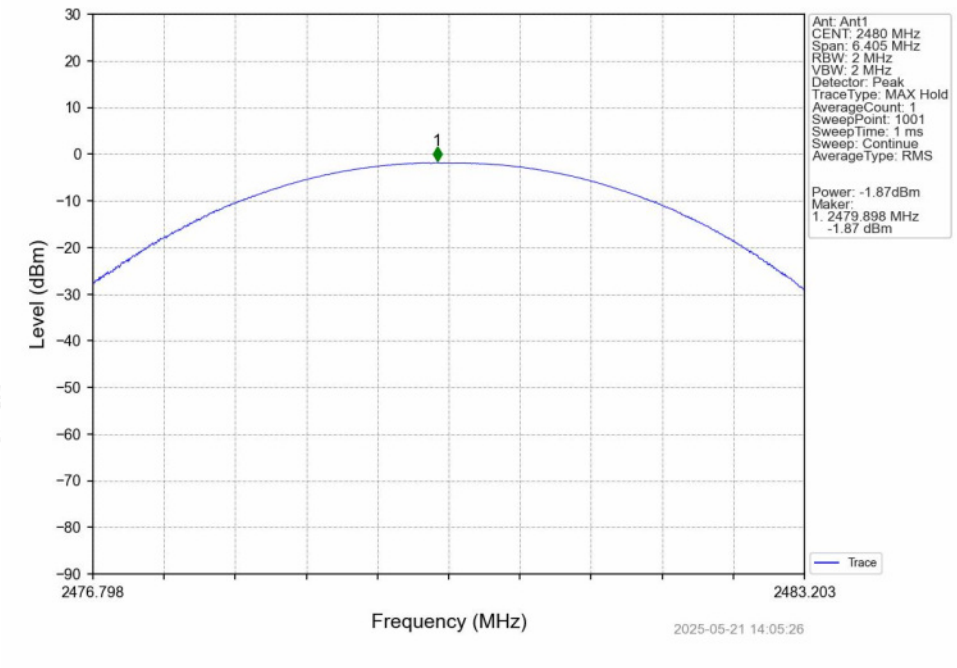

8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

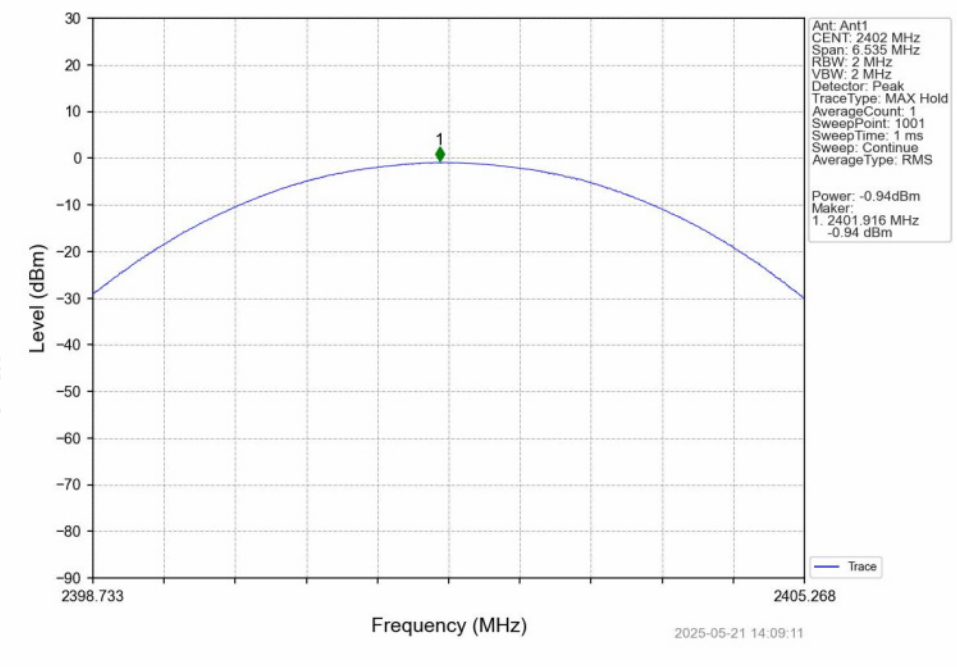

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

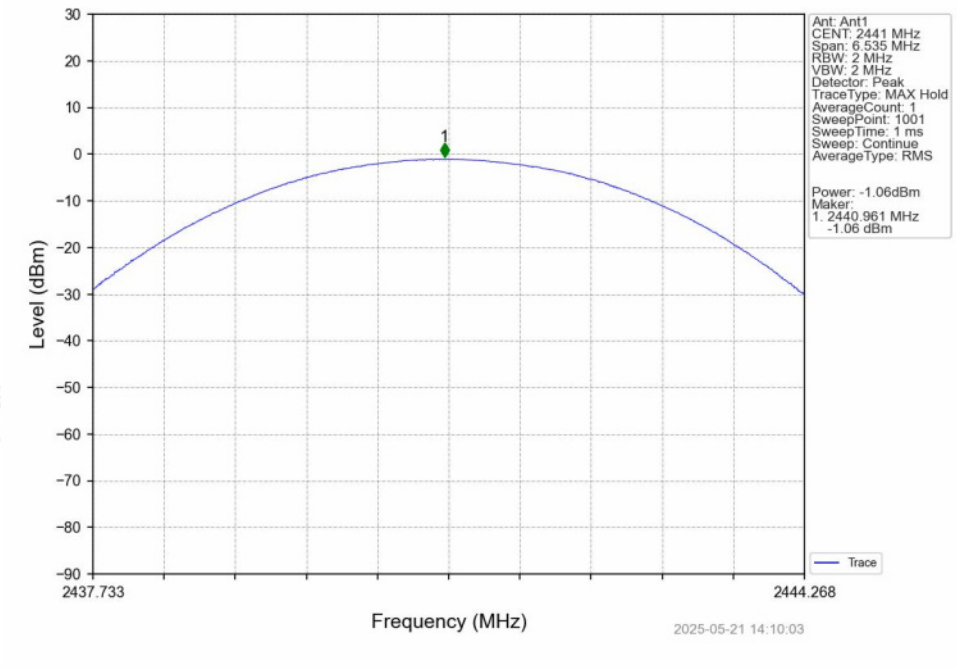

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

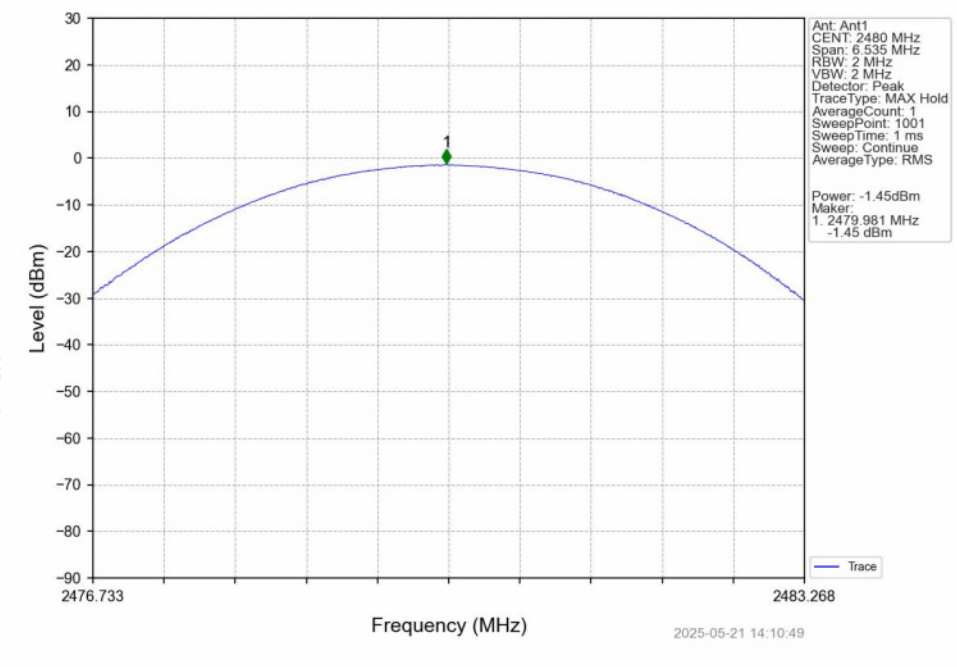

A.3 Carrier Frequencies Separation

Left eye:

Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	0.992	0.960	>=0.96	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	0.991	1.287	>=0.858	Pass
8DPSK	SISO	HOPP	3DH5	0.991	1.308	>=0.872	Pass

GFSK_DH5_HOPP_Ant1_NTNV

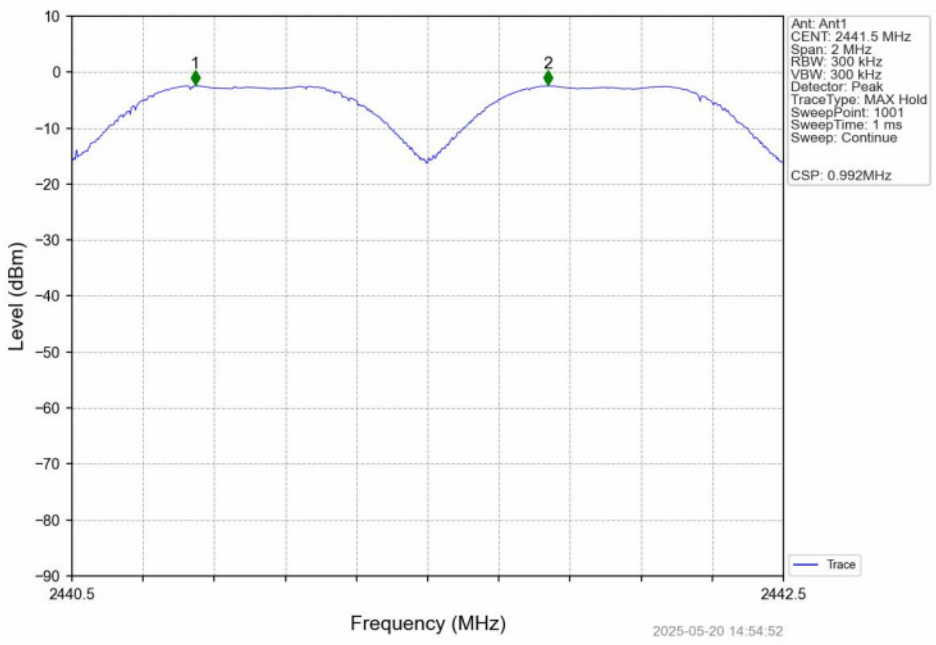

Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

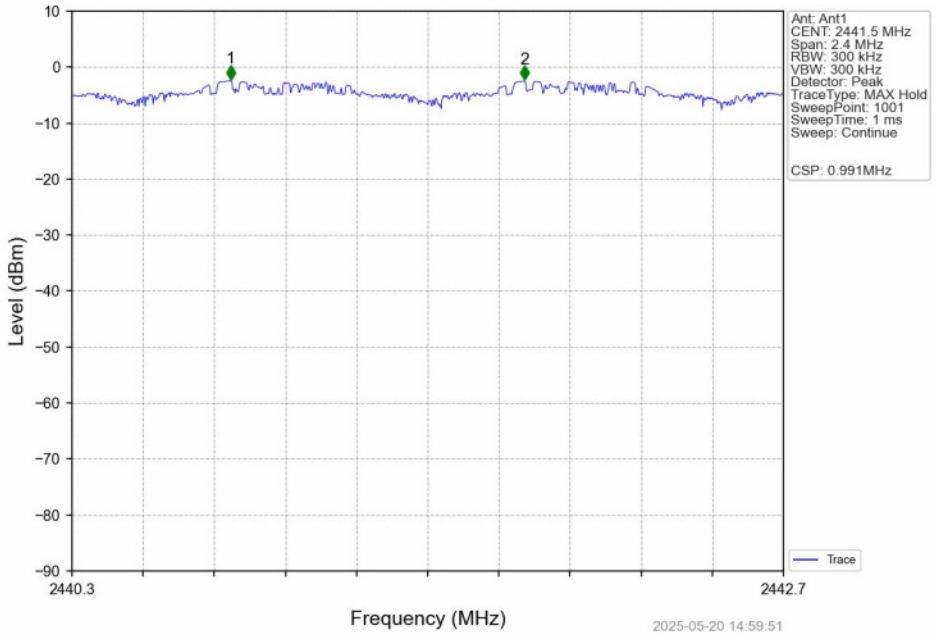

8DPSK_3DH5_HOPP_Ant1_NTNV

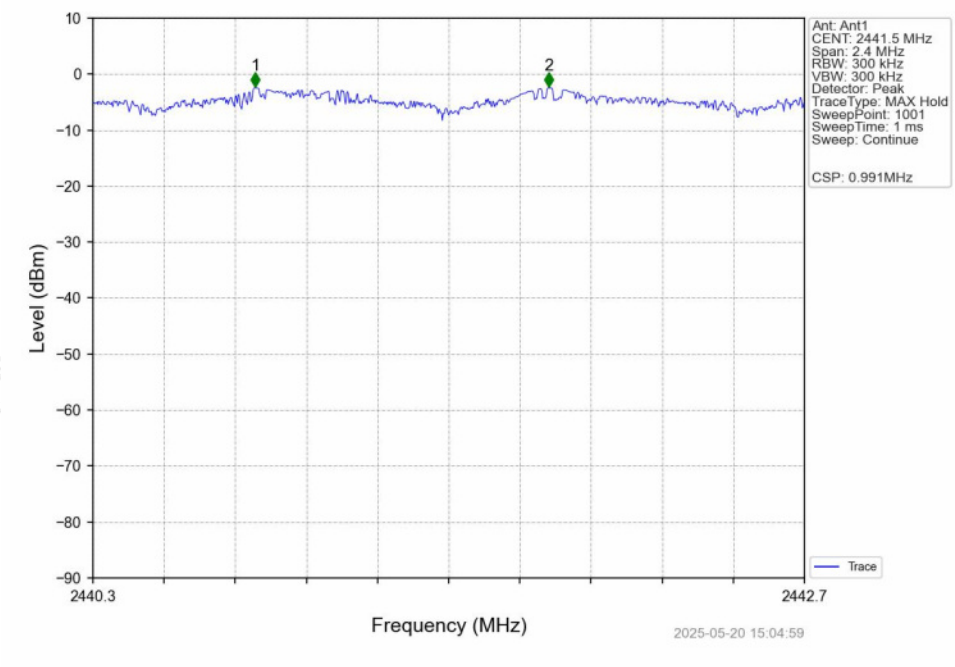

Right eye:

Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	0.998	0.956	>=0.956	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.049	1.283	>=0.855	Pass
8DPSK	SISO	HOPP	3DH5	0.996	1.307	>=0.871	Pass

GFSK_DH5_HOPP_Ant1_NTNV

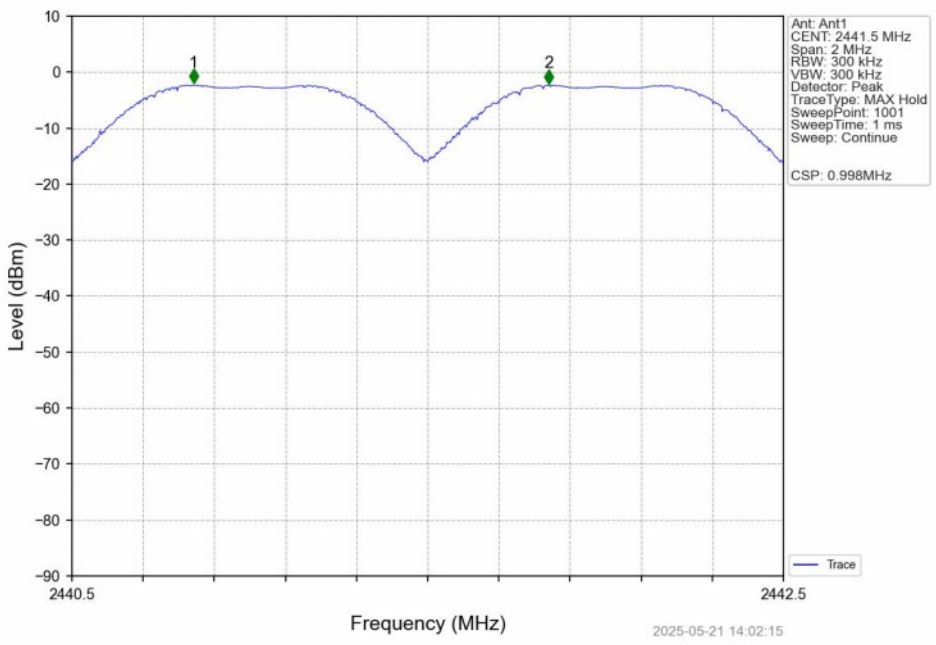

Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

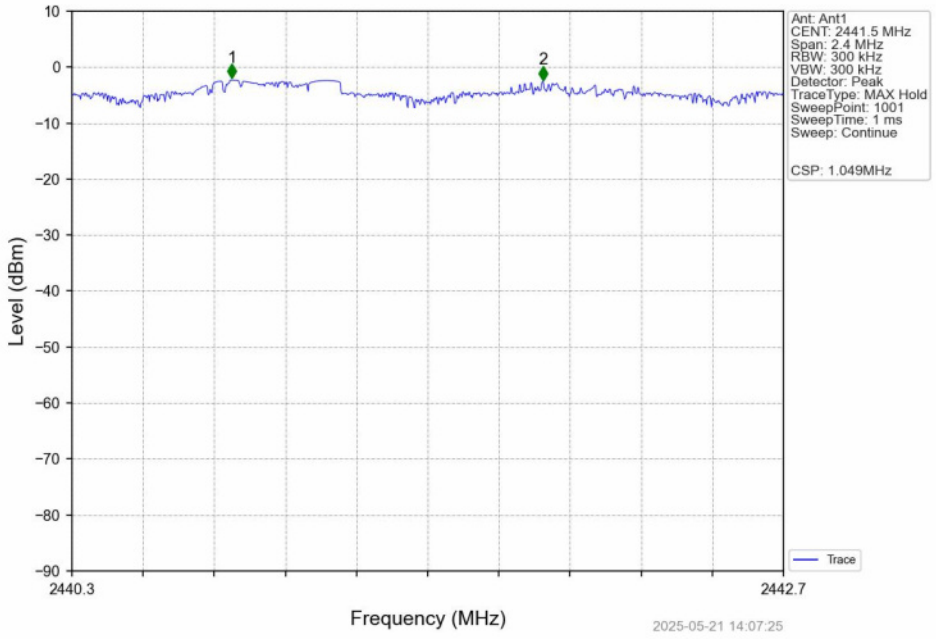

8DPSK_3DH5_HOPP_Ant1_NTNV

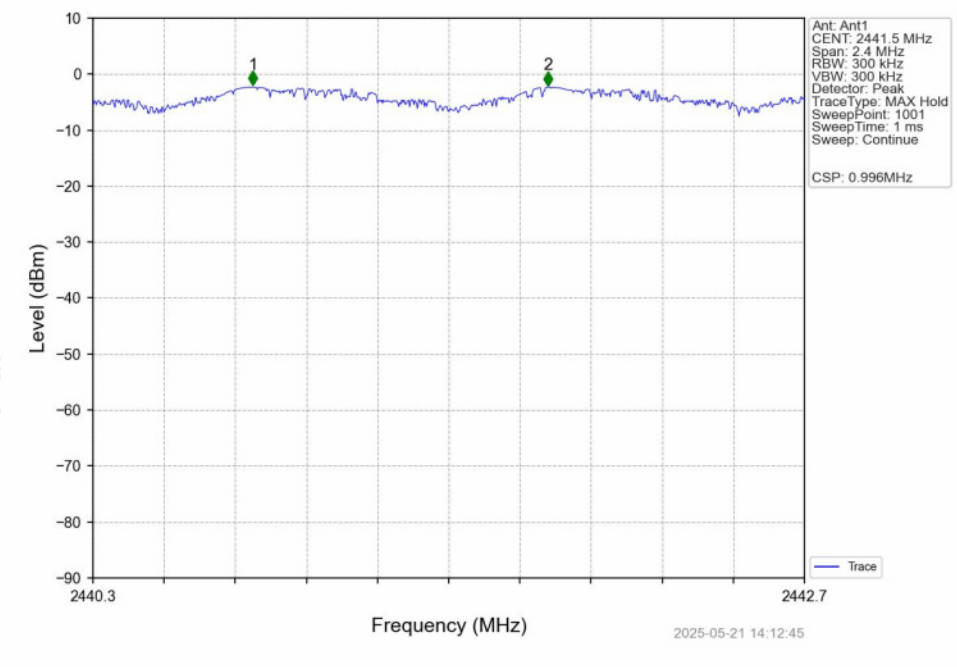

A.4 Dwell Time

Left eye:

Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH5	2.888	31.600	114	329.232	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	2.894	31.600	108	312.552	<=400	Pass
8DPSK	SISO	HOPP	3DH5	2.894	31.600	101	292.294	<=400	Pass

GFSK_DH5_HOPP_Ant1_NTNV

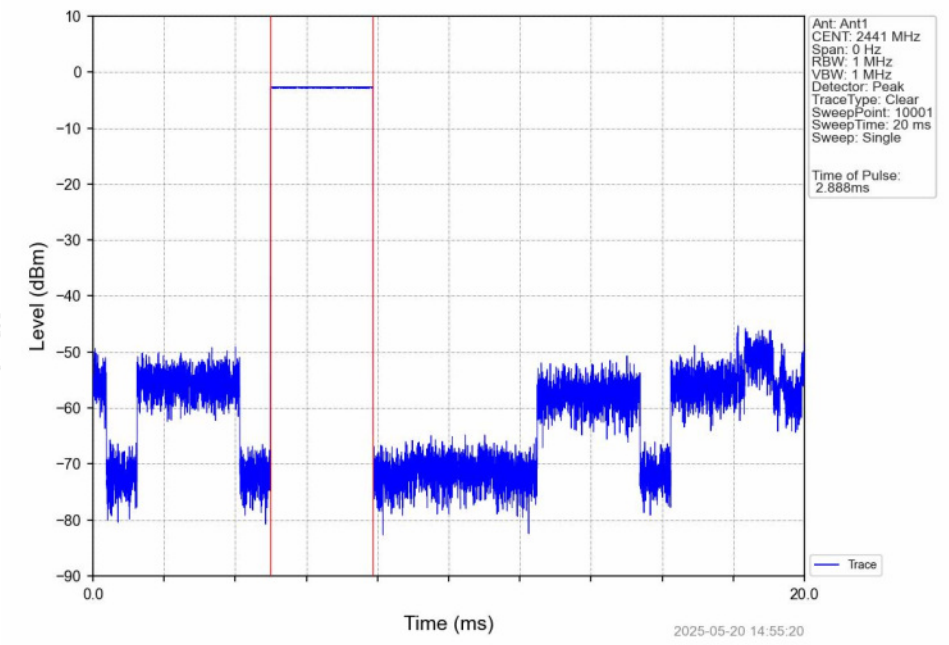

GFSK_DH5_HOPP_Ant1_NTNV

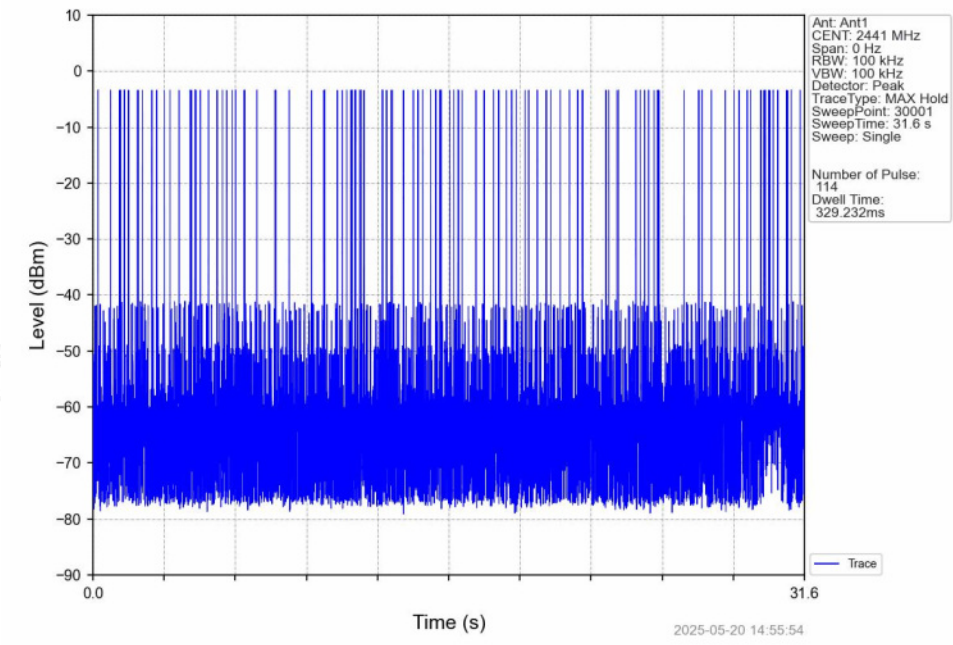

Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

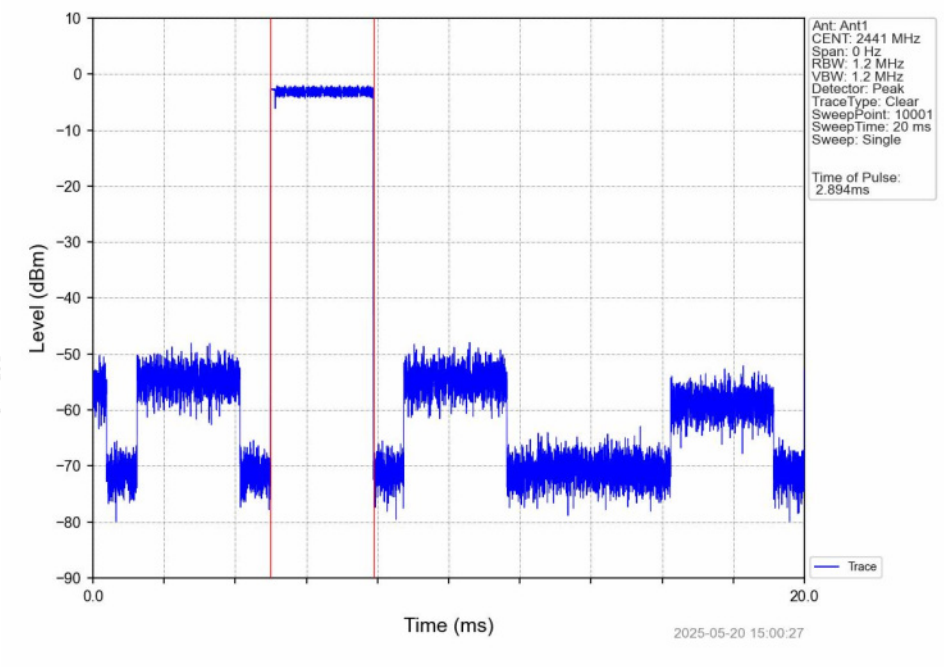

Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

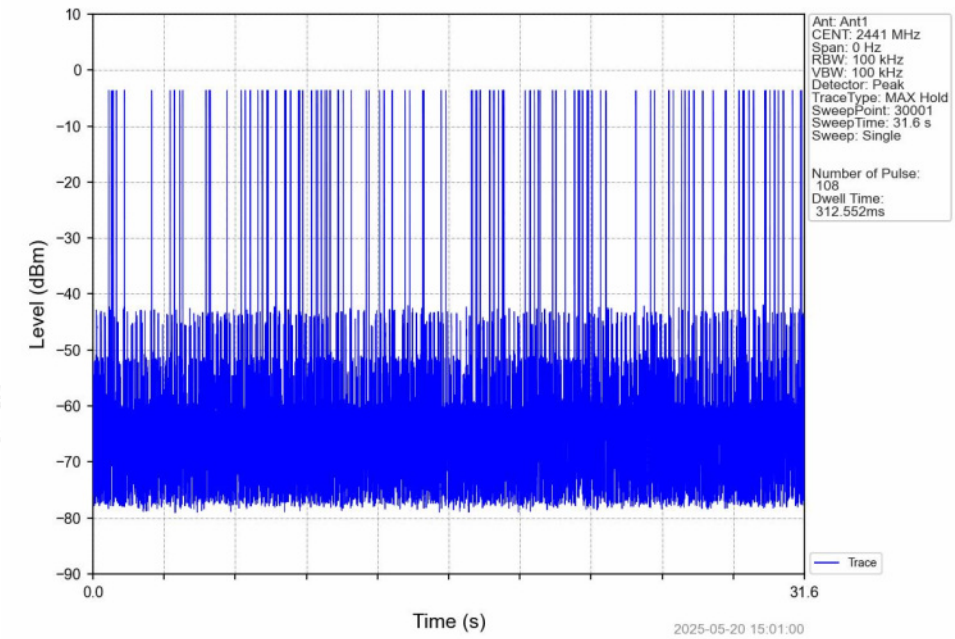

8DPSK_3DH5_HOPP_Ant1_NTNV

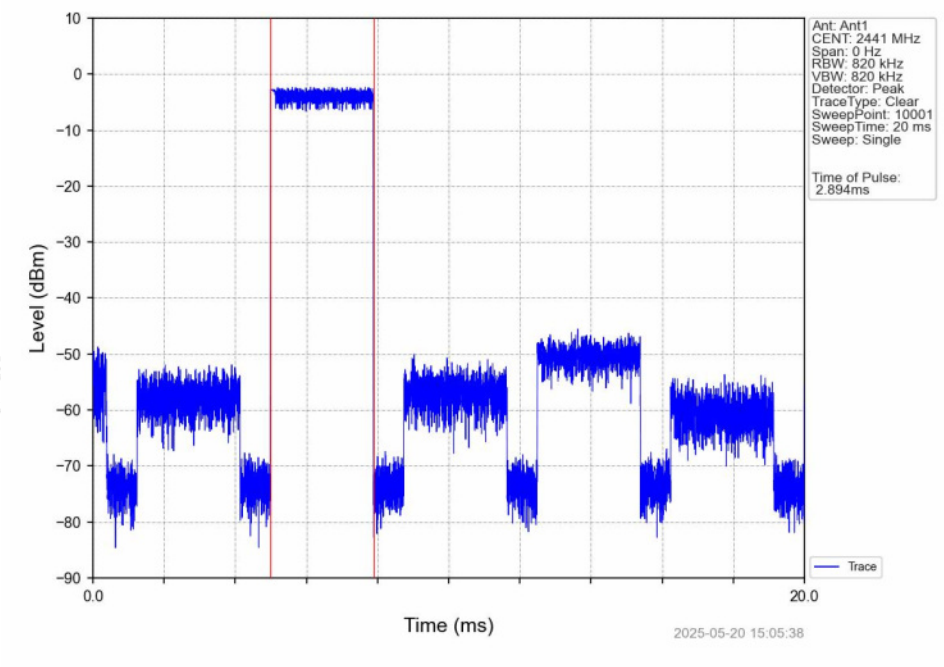

8DPSK_3DH5_HOPP_Ant1_NTNV

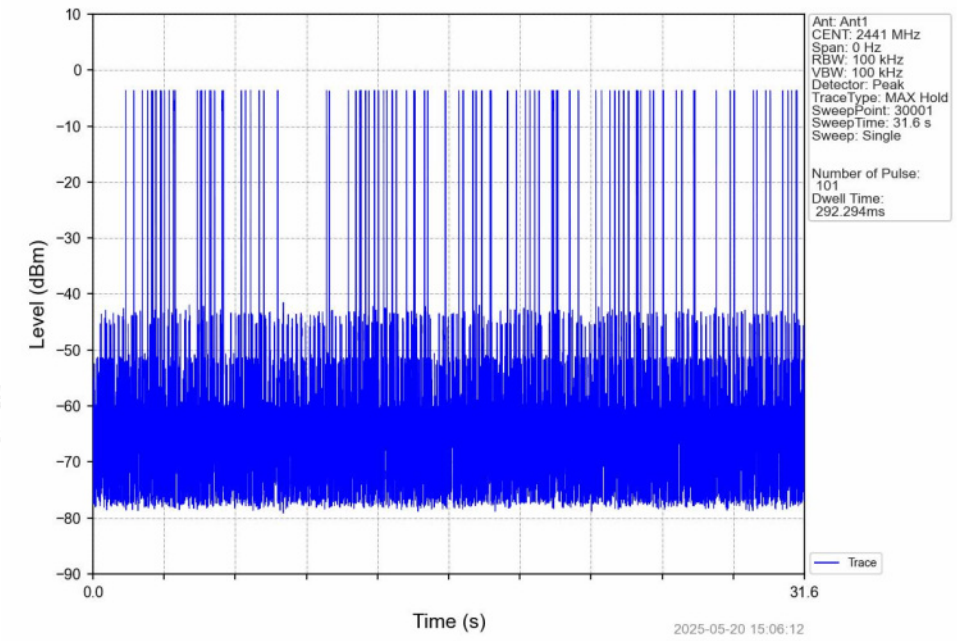

Right eye:

Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH5	2.888	31.600	103	297.464	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	2.896	31.600	130	376.480	<=400	Pass
8DPSK	SISO	HOPP	3DH5	2.892	31.600	111	321.012	<=400	Pass

GFSK_DH5_HOPP_Ant1_NTNV

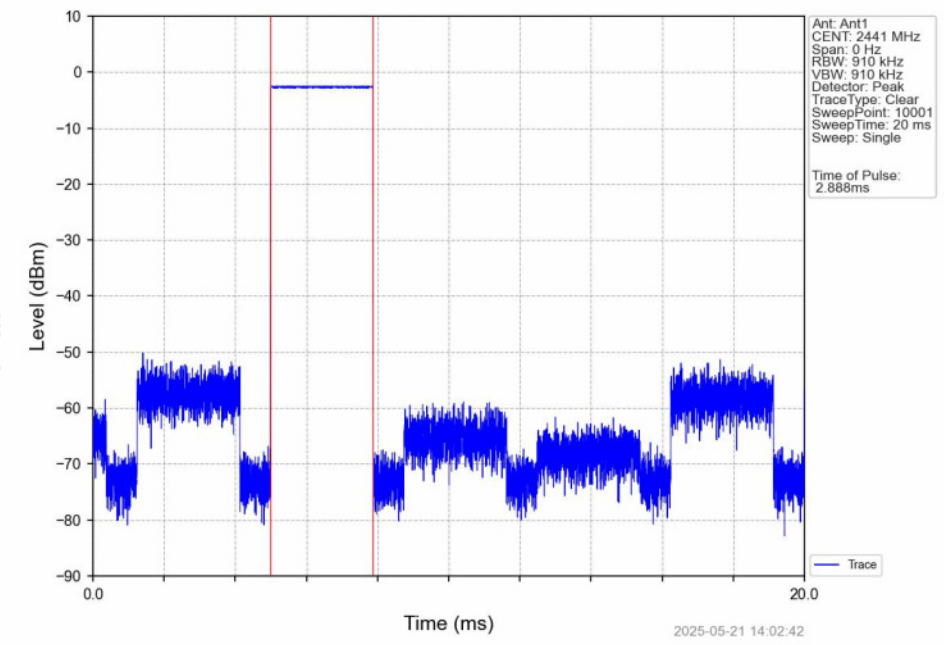

GFSK_DH5_HOPP_Ant1_NTNV

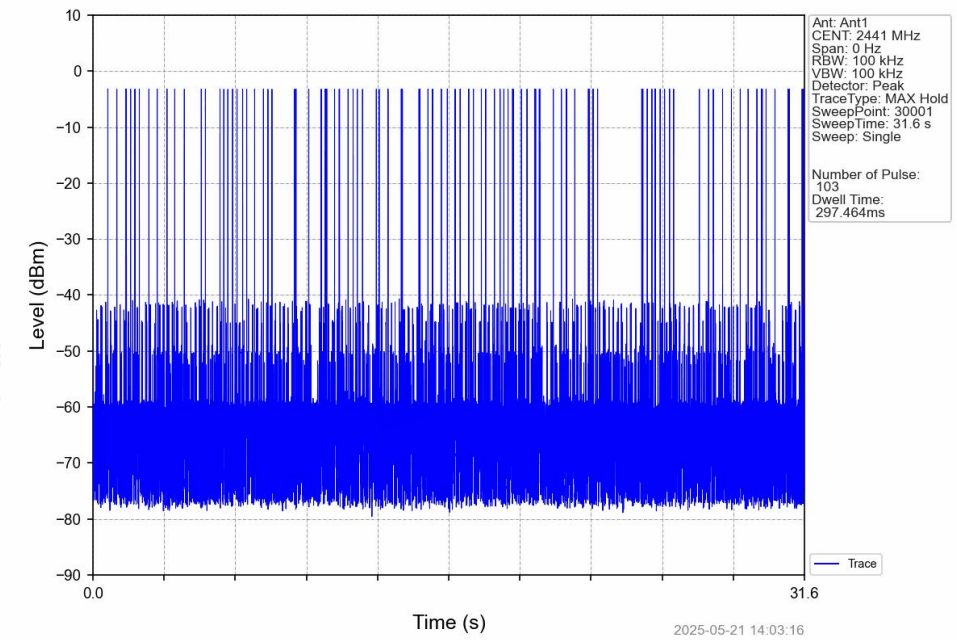

Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

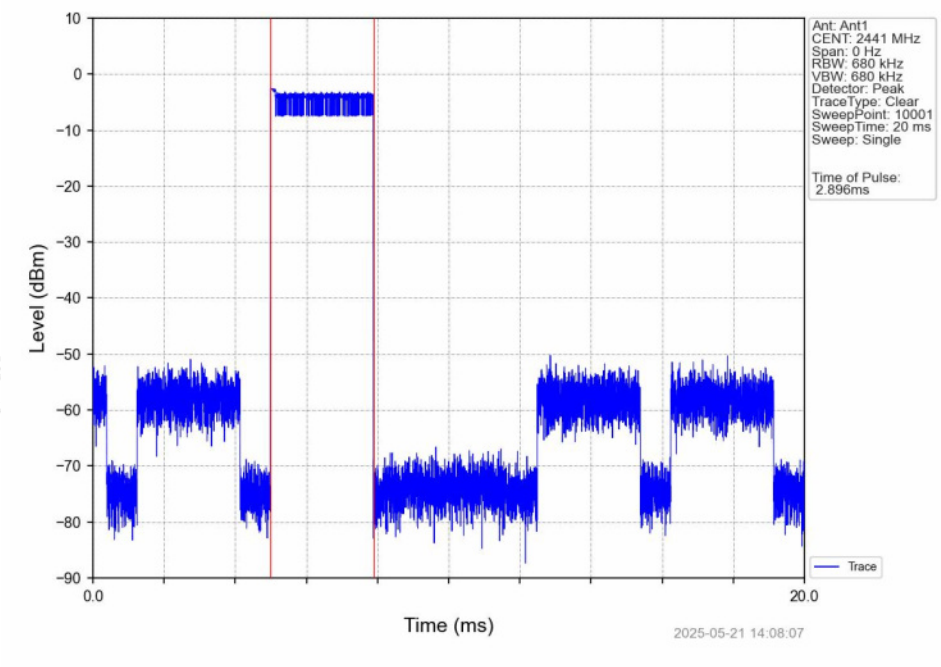

Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

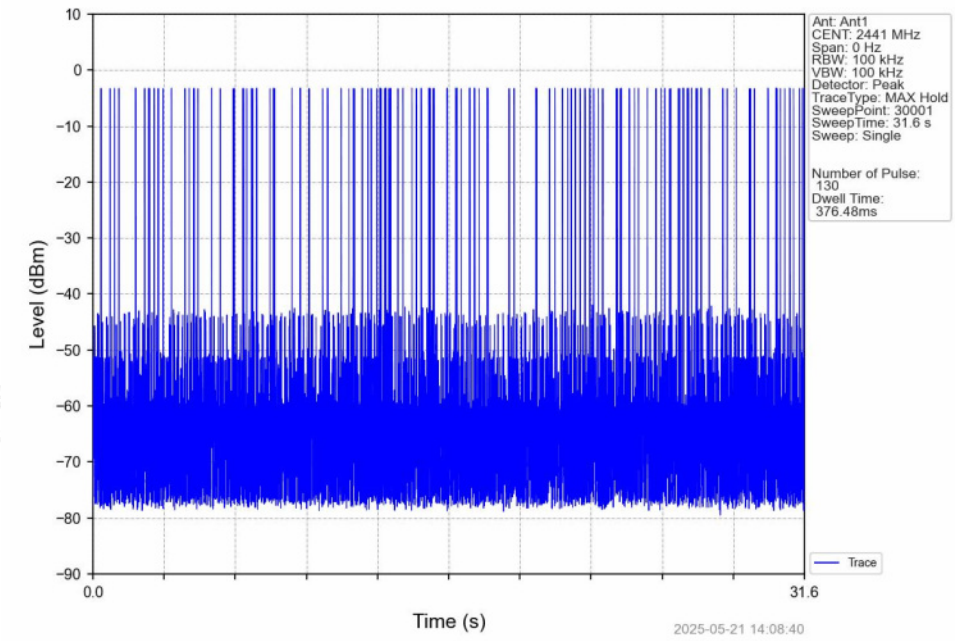

8DPSK_3DH5_HOPP_Ant1_NTNV

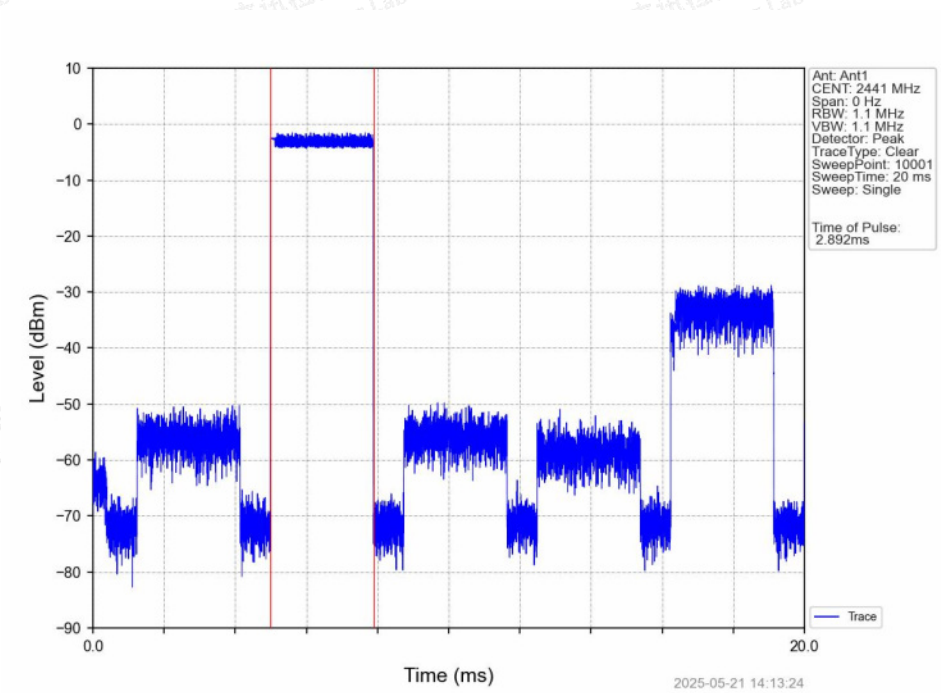

8DPSK_3DH5_HOPP_Ant1_NTNV

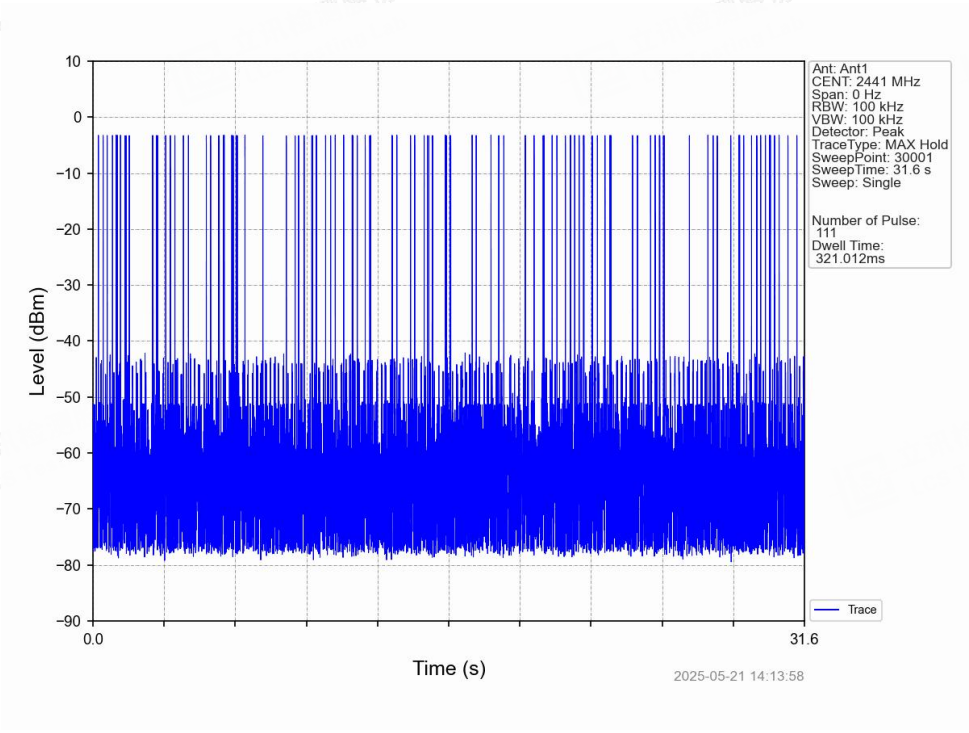

A.5 Number of Hopping Channel

Left eye:

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	>=15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	>=15	Pass
8DPSK	SISO	HOPP	3DH5	79	>=15	Pass

GFSK_DH5_HOPP_Ant1_NTNV

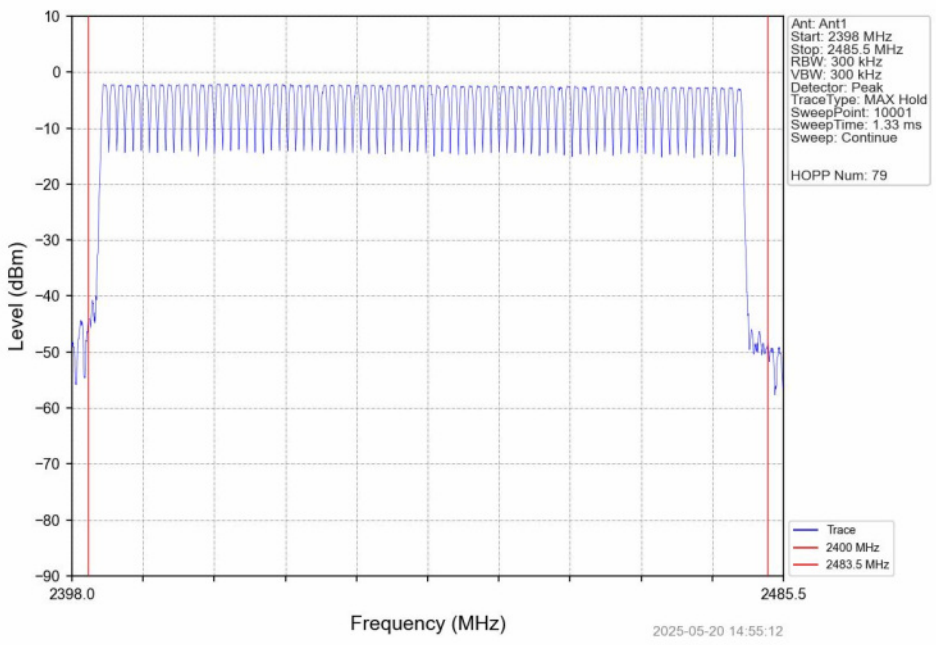

Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

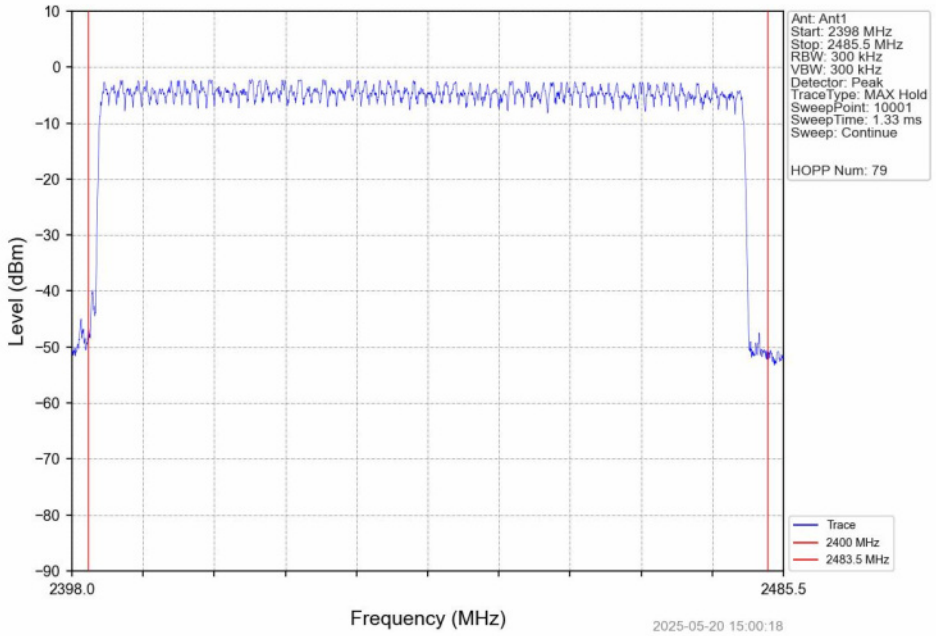

8DPSK_3DH5_HOPP_Ant1_NTNV

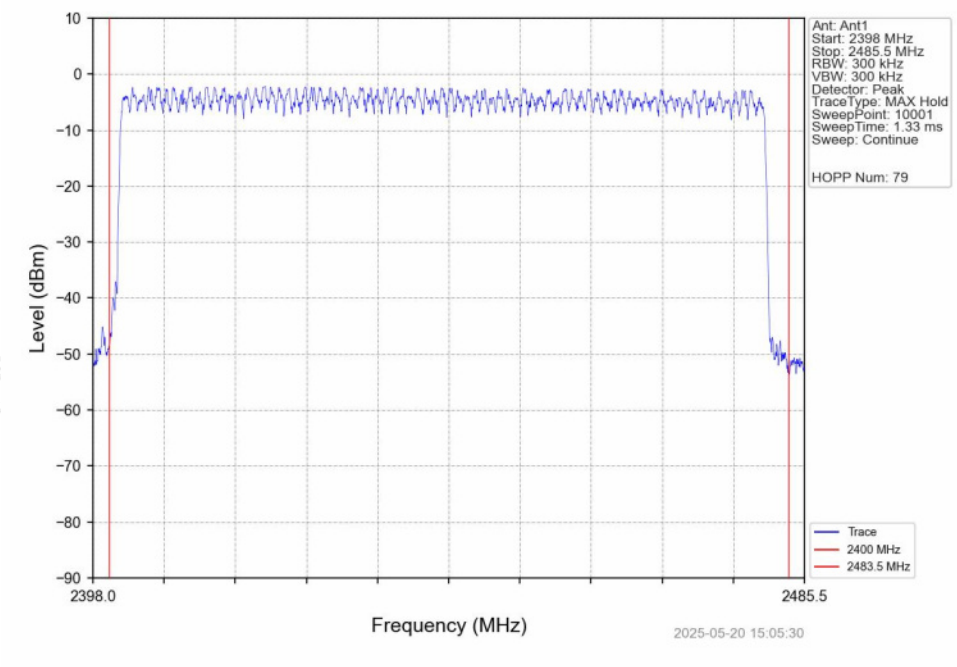

Right eye:

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	>=15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	>=15	Pass
8DPSK	SISO	HOPP	3DH5	79	>=15	Pass

GFSK_DH5_HOPP_Ant1_NTNV

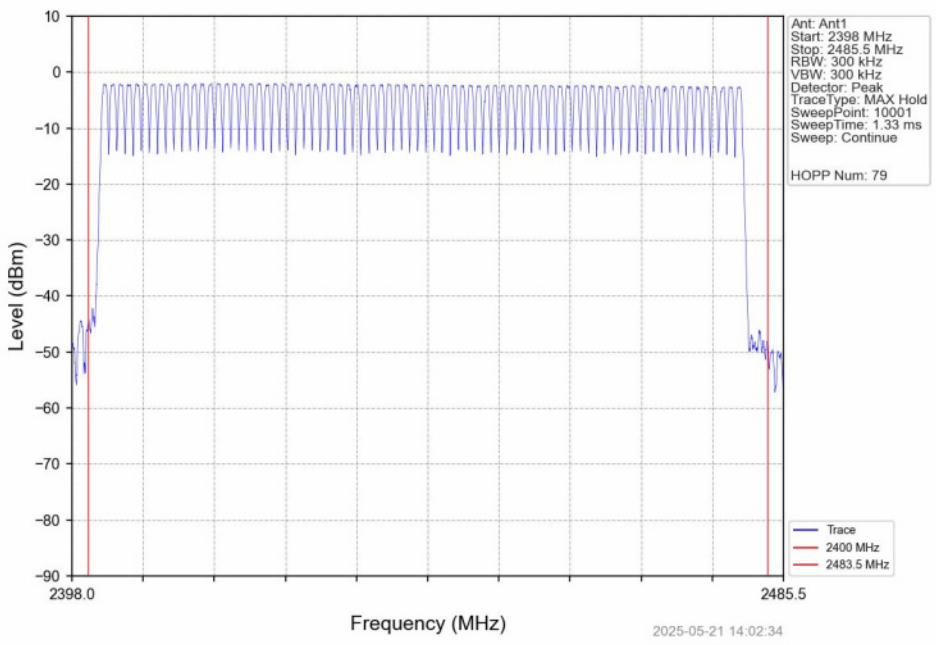

Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

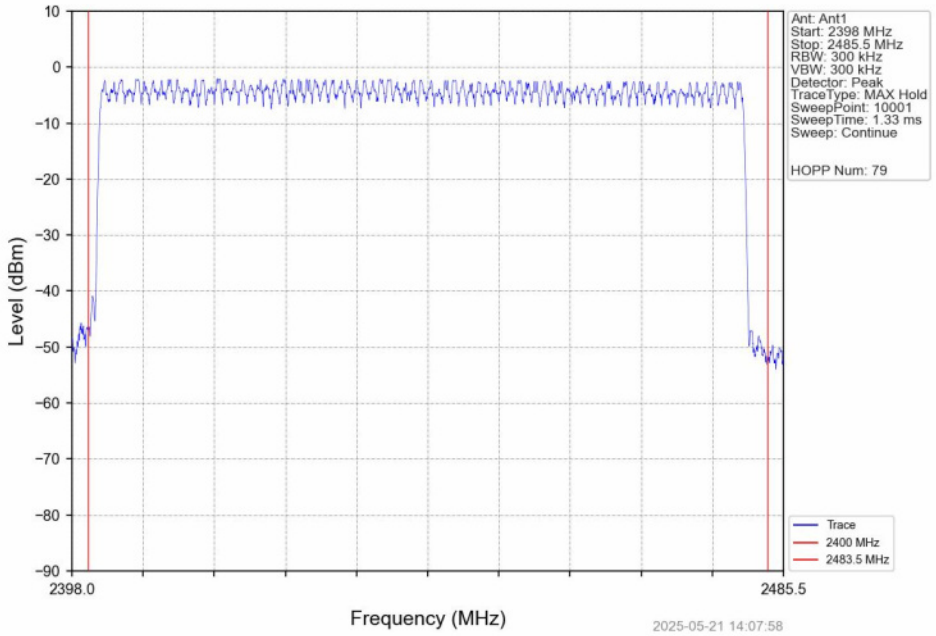

8DPSK_3DH5_HOPP_Ant1_NTNV

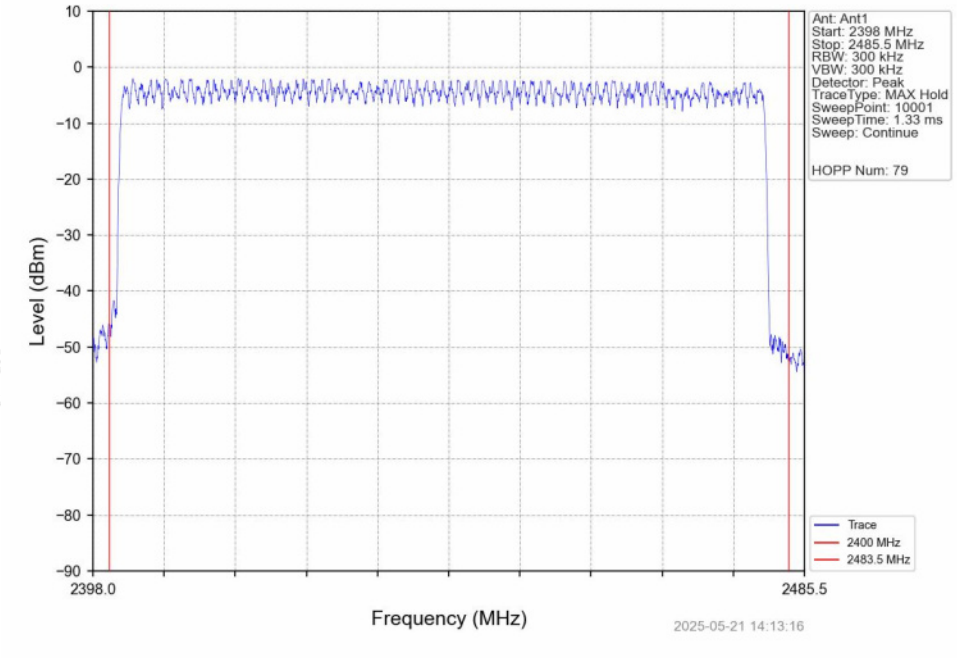

A.6 Band Edge

Left eye:

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	-2.47	-22.47	Pass
		2441	DH5	1	-2.47	-22.47	Pass
		2480	DH5	1	-2.47	-22.47	Pass
		HOPP	DH5	1	-2.47	-22.47	Pass
					-2.47	-22.47	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	-2.53	-22.53	Pass
		2441	2DH5	1	-2.53	-22.53	Pass
		2480	2DH5	1	-2.53	-22.53	Pass
		HOPP	2DH5	1	-2.53	-22.53	Pass
					-2.53	-22.53	Pass
8DPSK	SISO	2402	3DH5	1	-2.60	-22.60	Pass
		2441	3DH5	1	-2.60	-22.60	Pass
		2480	3DH5	1	-2.60	-22.60	Pass
		HOPP	3DH5	1	-2.60	-22.60	Pass
					-2.60	-22.60	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.							