






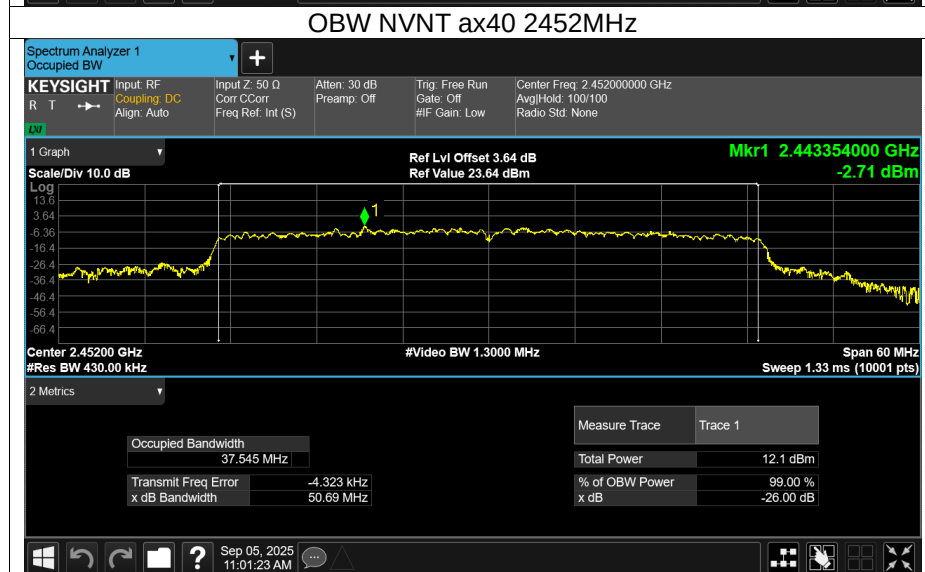


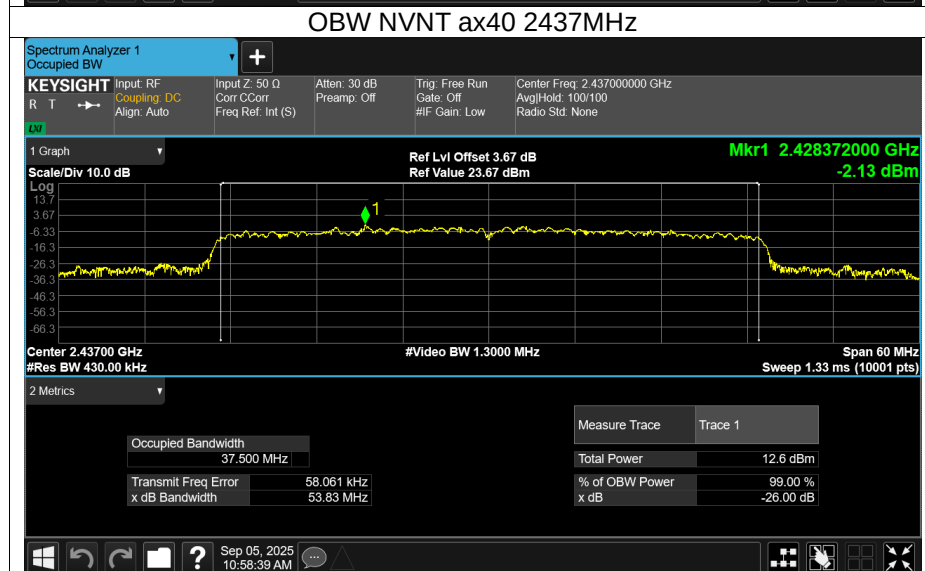



Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	-9.13	8	Pass
NVNT	b	2437	-7.95	8	Pass
NVNT	b	2462	-9.07	8	Pass
NVNT	g	2412	-13.62	8	Pass
NVNT	g	2437	-17.84	8	Pass
NVNT	g	2462	-17.18	8	Pass
NVNT	n20	2412	-16.2	8	Pass
NVNT	n20	2437	-16.53	8	Pass
NVNT	n20	2462	-16.63	8	Pass
NVNT	n40	2422	-19.83	8	Pass
NVNT	n40	2437	-20	8	Pass
NVNT	n40	2452	-20.58	8	Pass
NVNT	ax20	2412	-16.69	8	Pass
NVNT	ax20	2437	-16.57	8	Pass
NVNT	ax20	2462	-16.9	8	Pass
NVNT	ax40	2422	-18.41	8	Pass
NVNT	ax40	2437	-19.87	8	Pass
NVNT	ax40	2452	-20.3	8	Pass

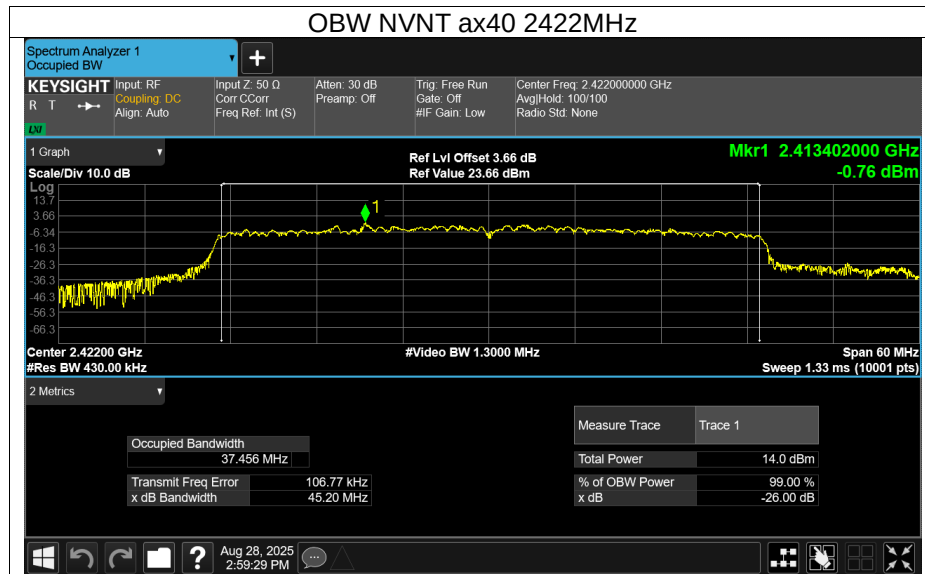


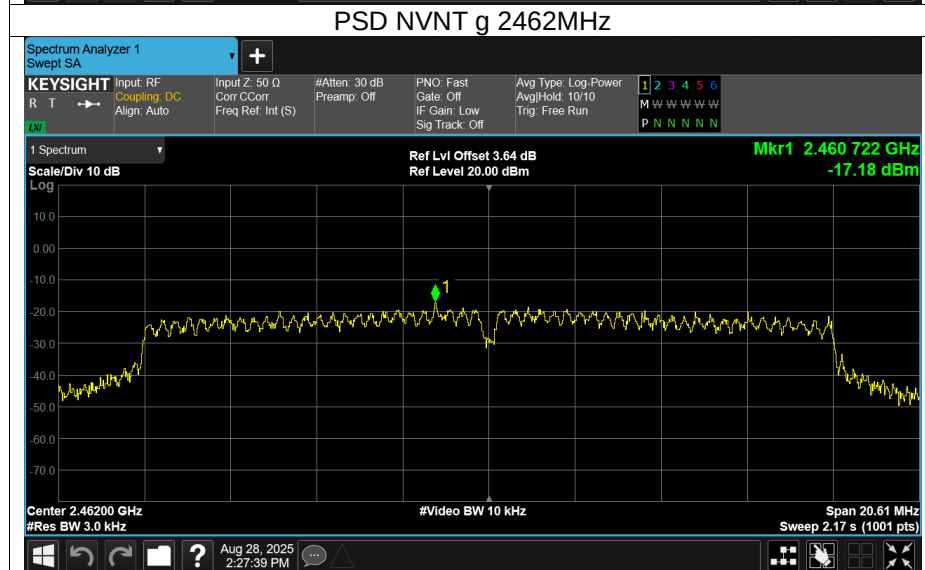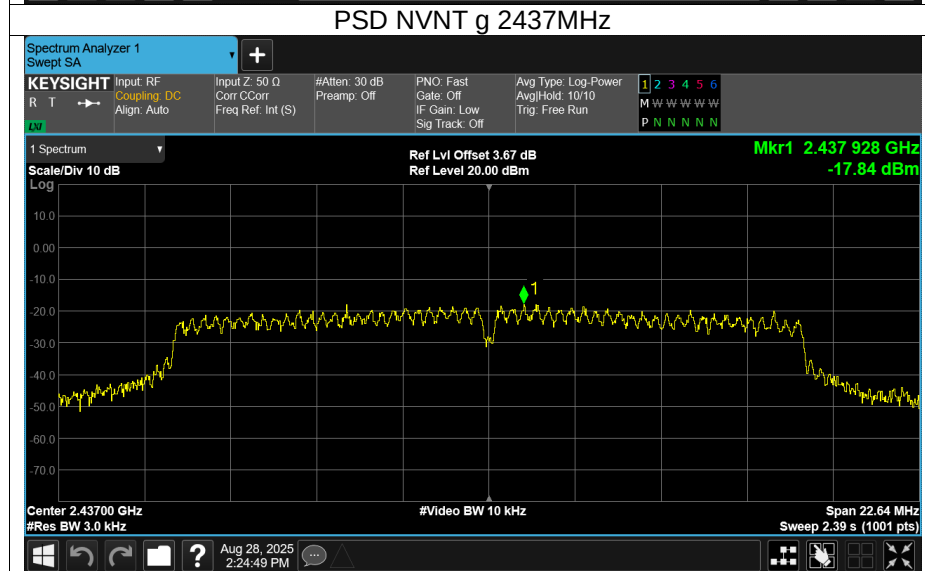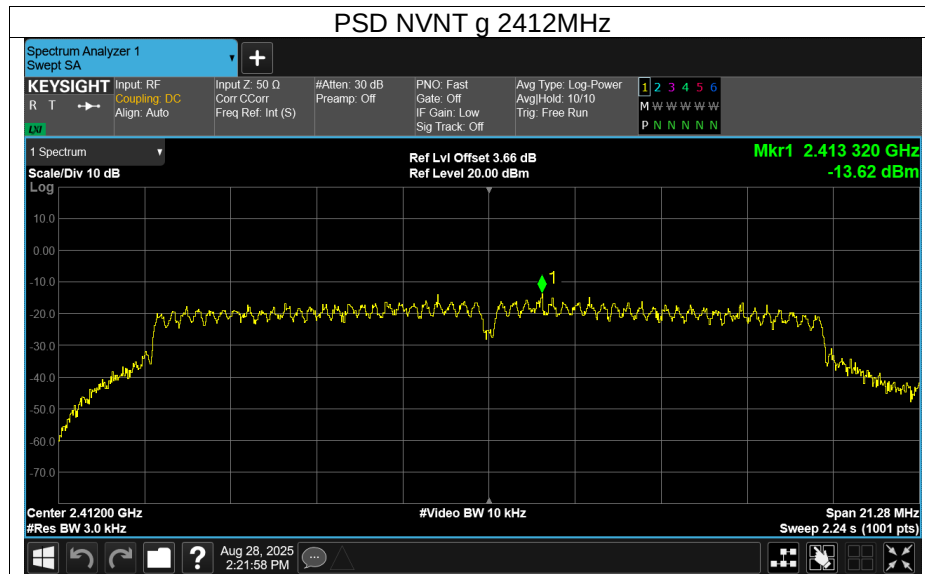

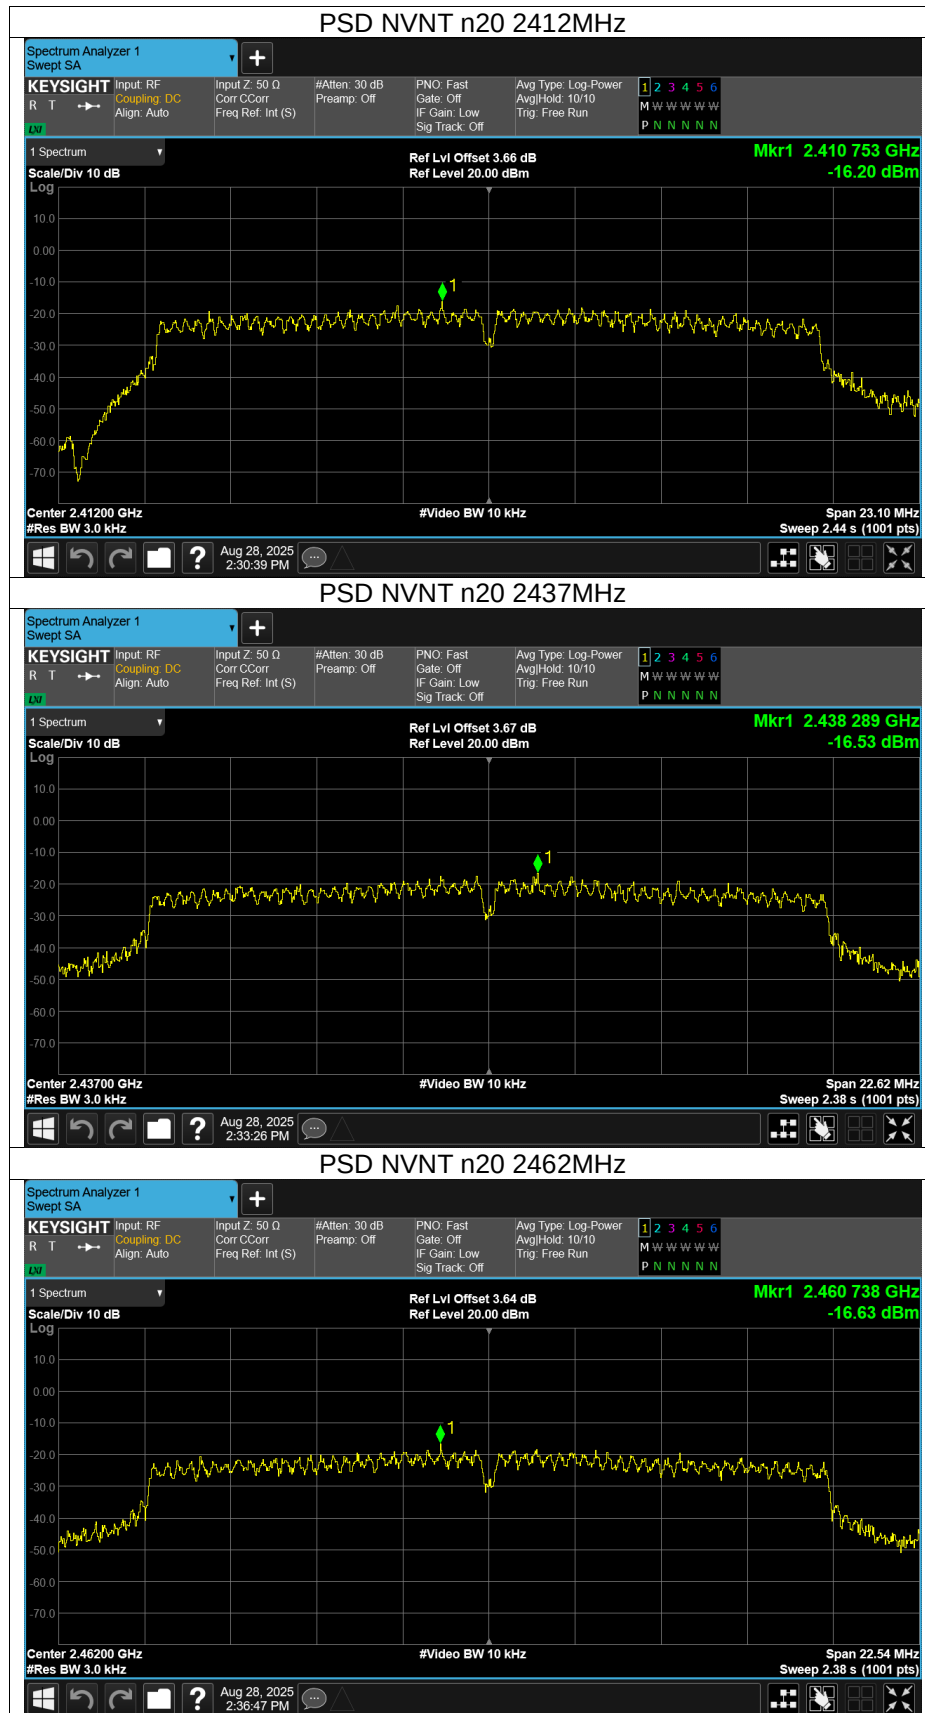

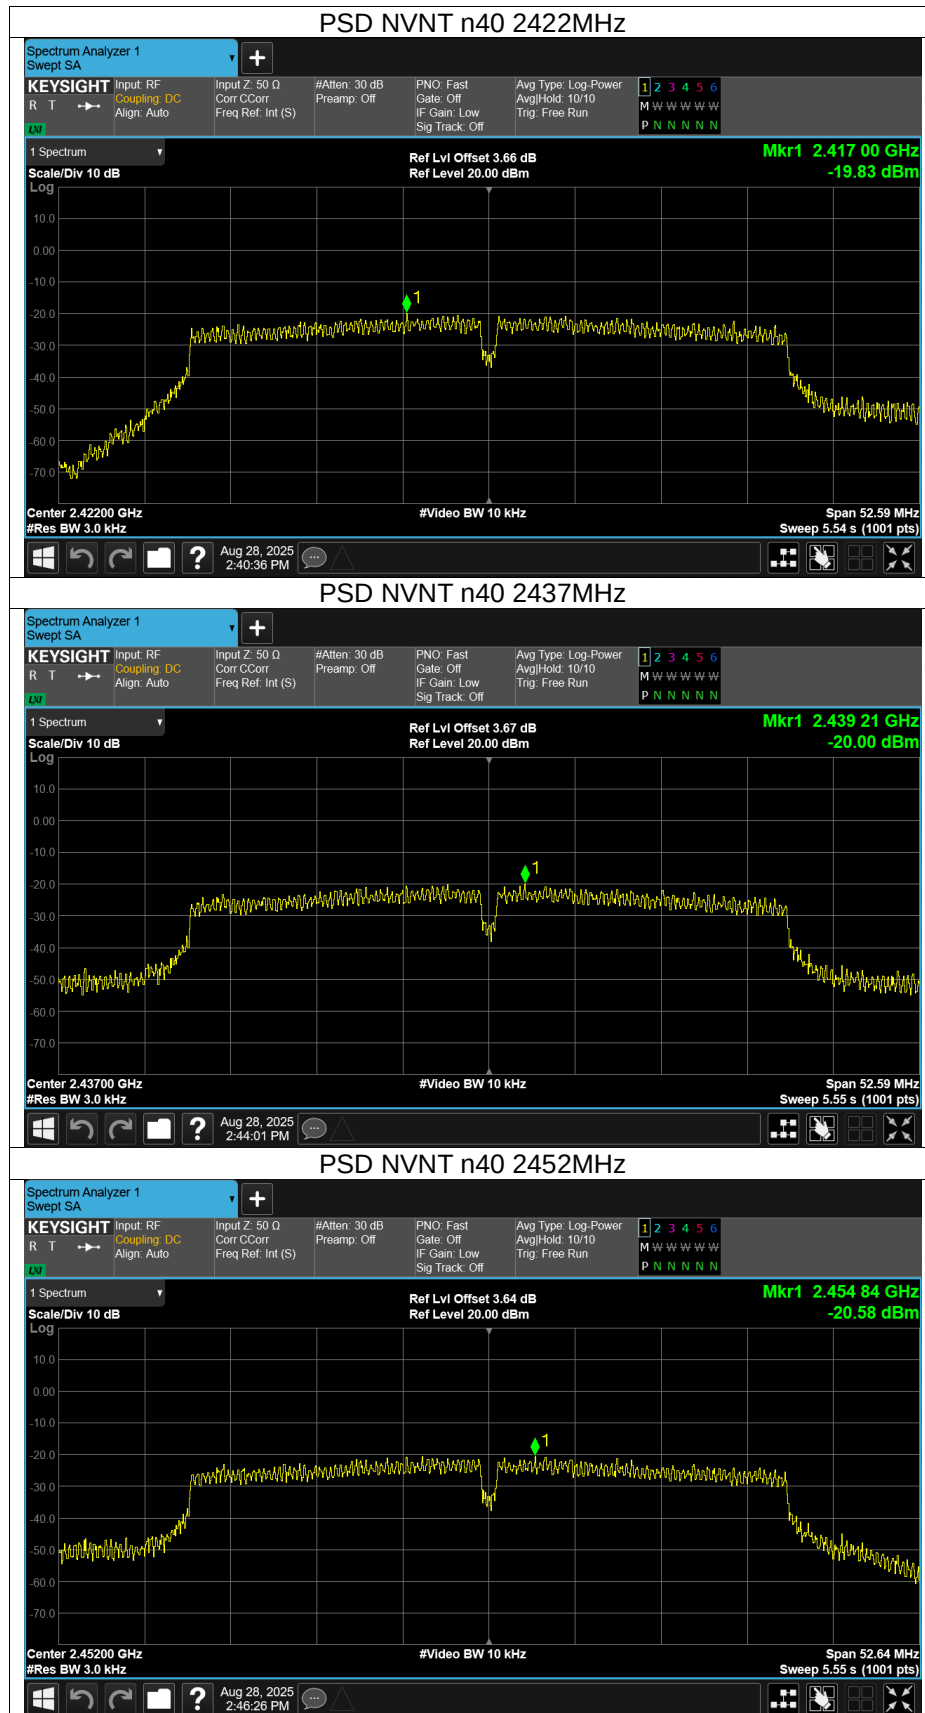

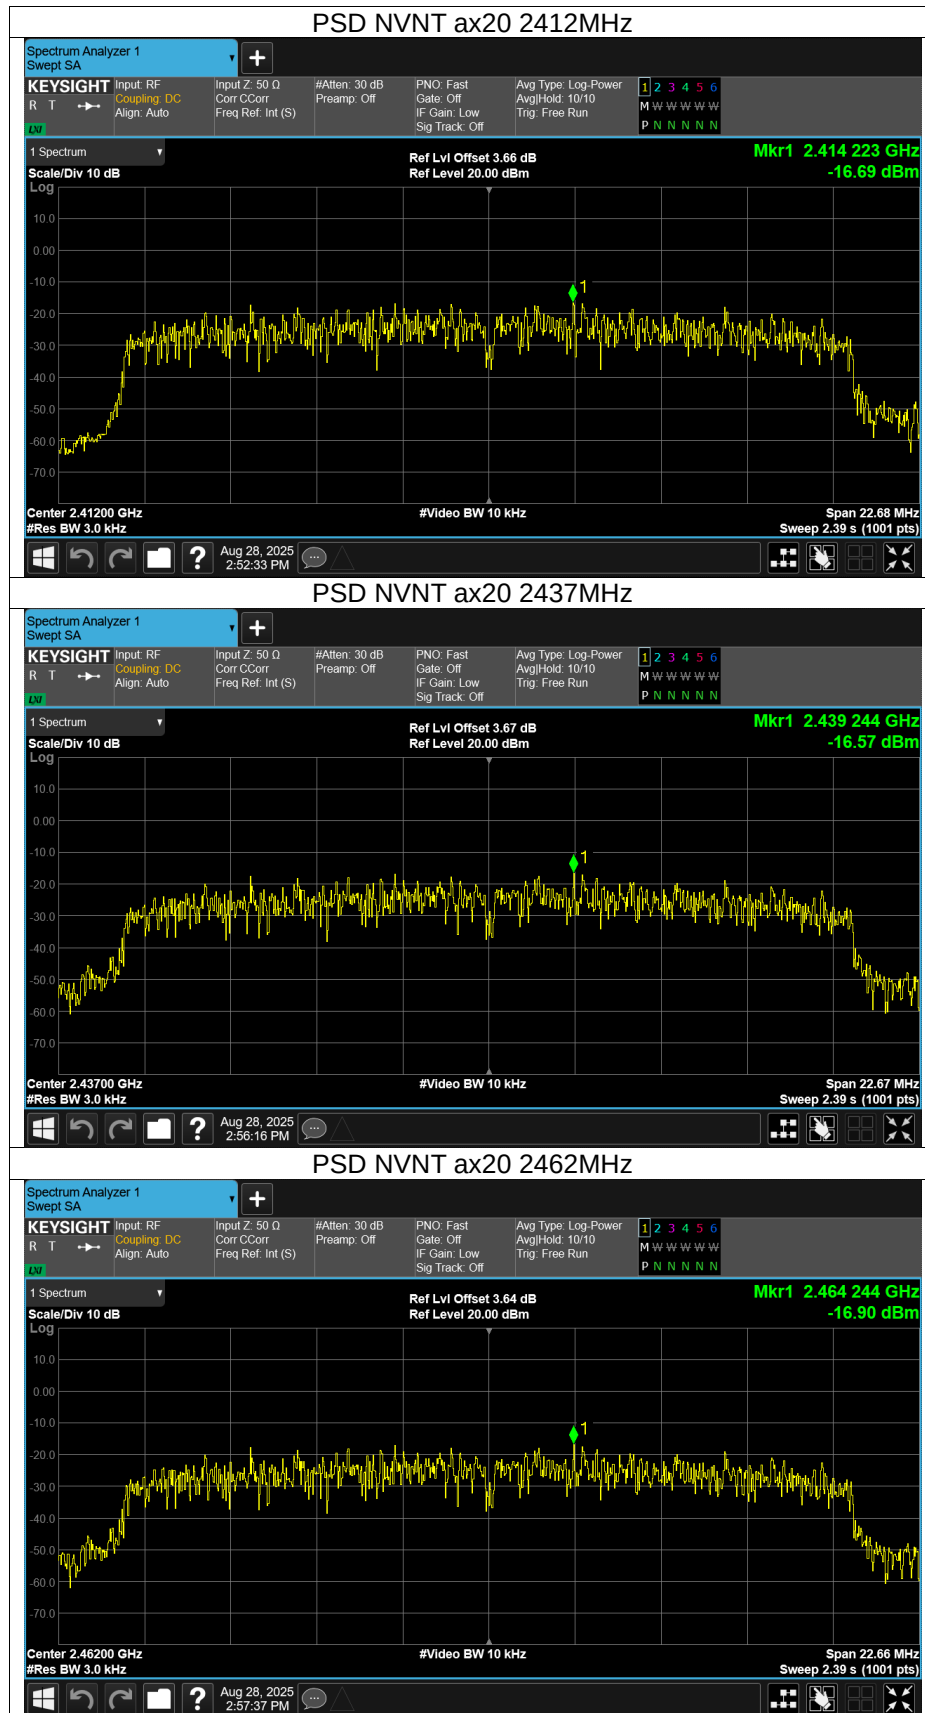




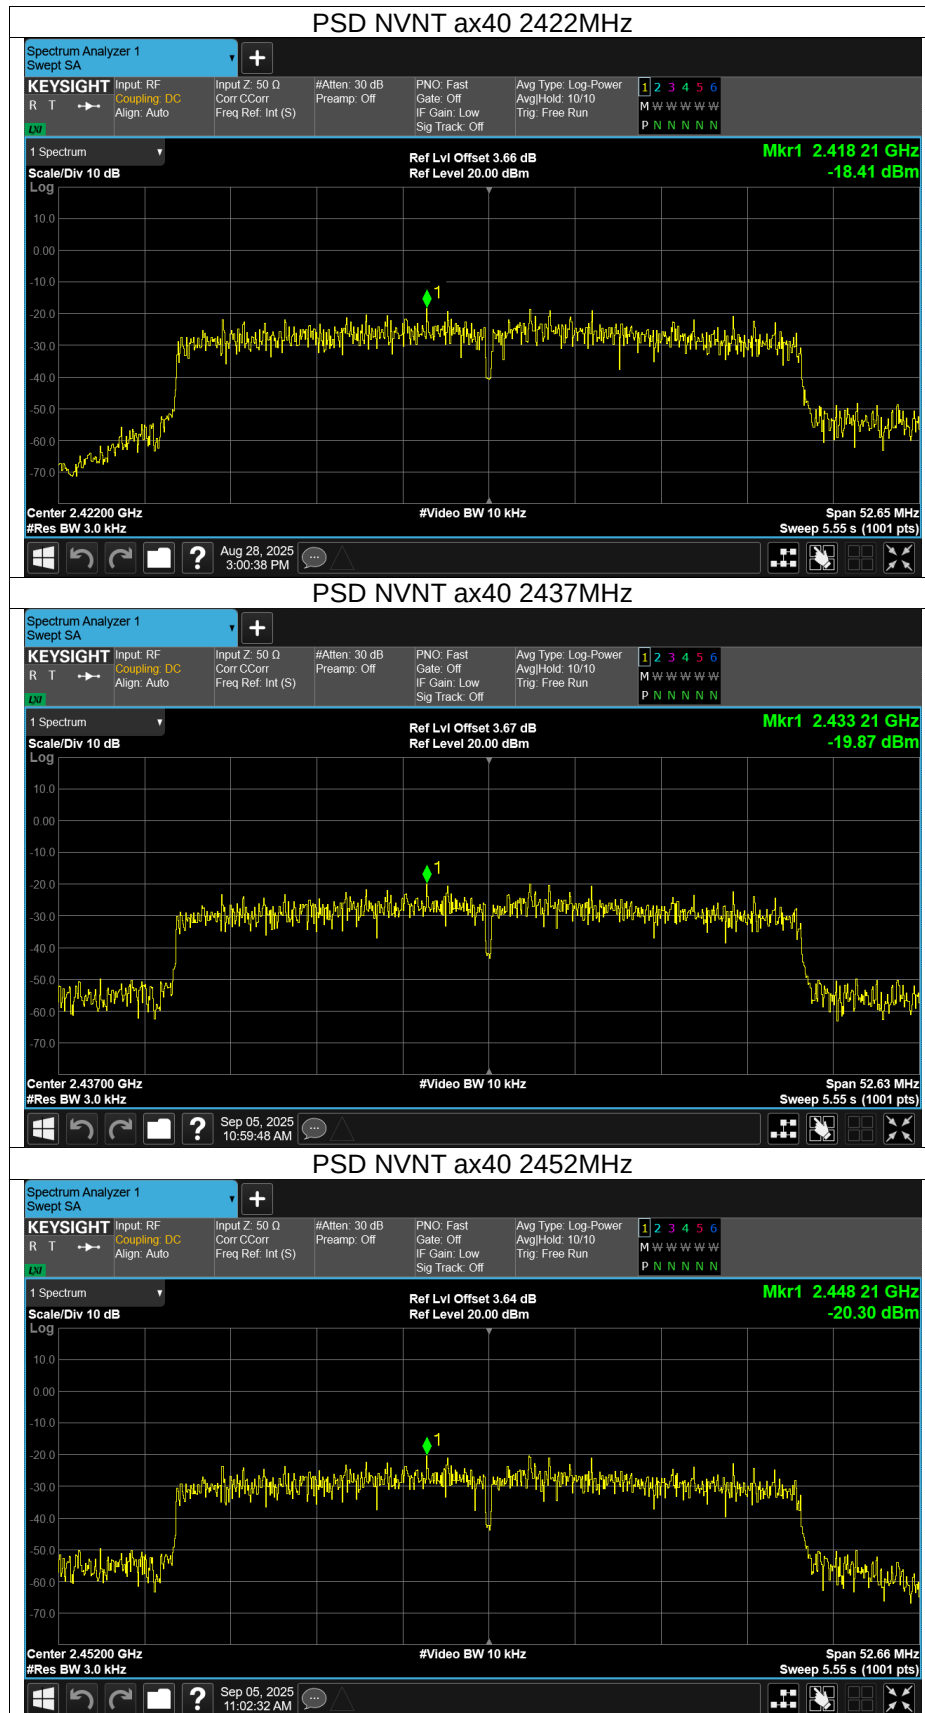










Band Edge


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	-54.22	-20	Pass
NVNT	b	2462	-62.08	-20	Pass
NVNT	g	2412	-46.12	-20	Pass
NVNT	g	2462	-53.7	-20	Pass
NVNT	n20	2412	-46.57	-20	Pass
NVNT	n20	2462	-53.9	-20	Pass
NVNT	n40	2422	-38.02	-20	Pass
NVNT	n40	2452	-49.71	-20	Pass
NVNT	ax20	2412	-40.15	-20	Pass
NVNT	ax20	2462	-52.51	-20	Pass
NVNT	ax40	2422	-35.99	-20	Pass
NVNT	ax40	2452	-45.72	-20	Pass



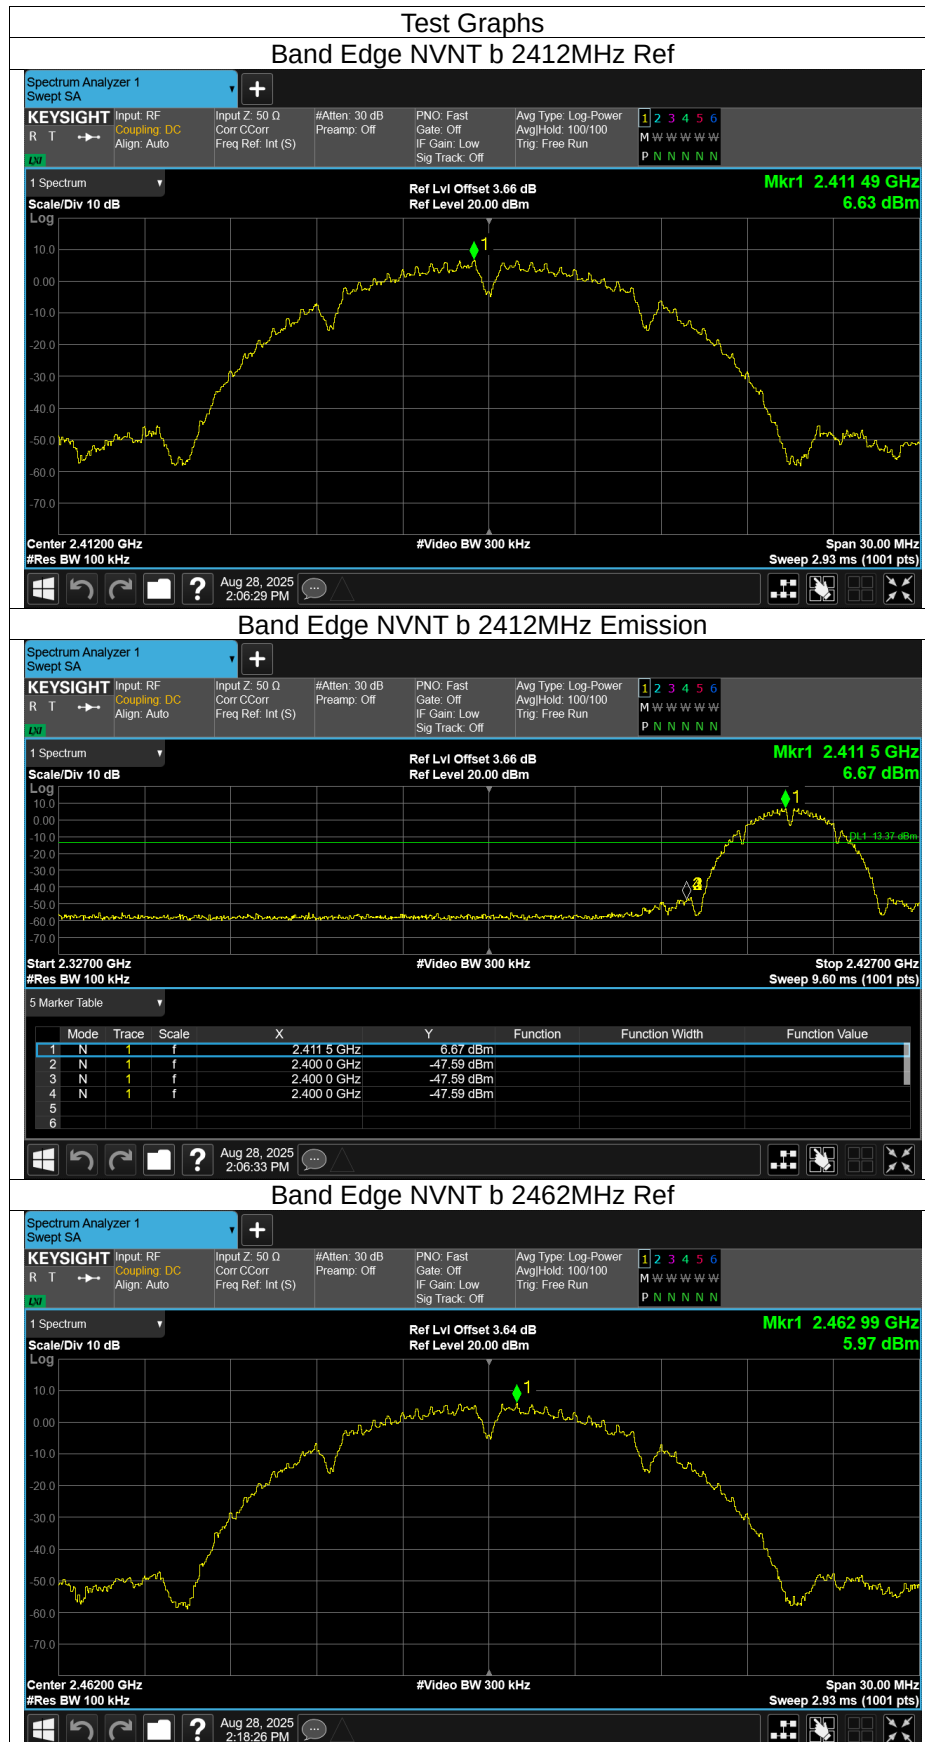


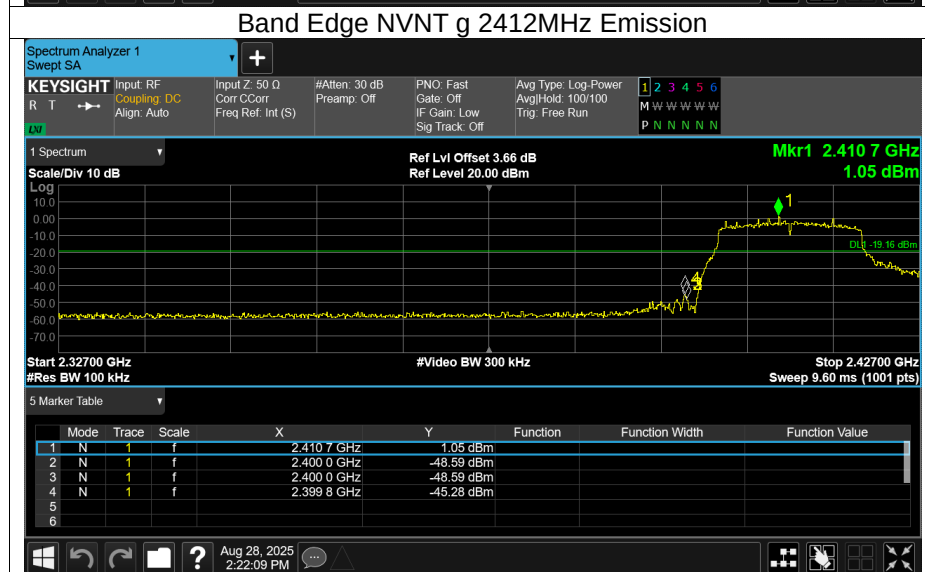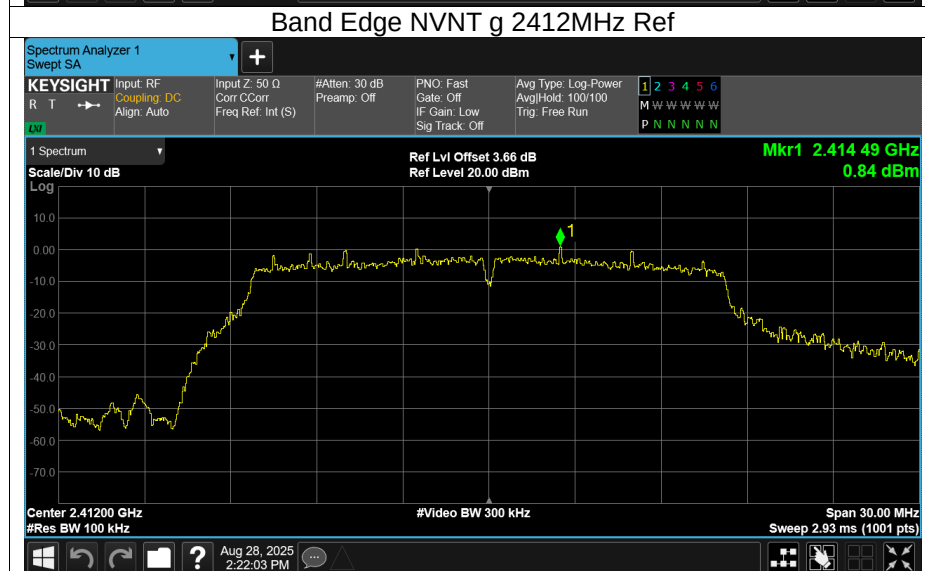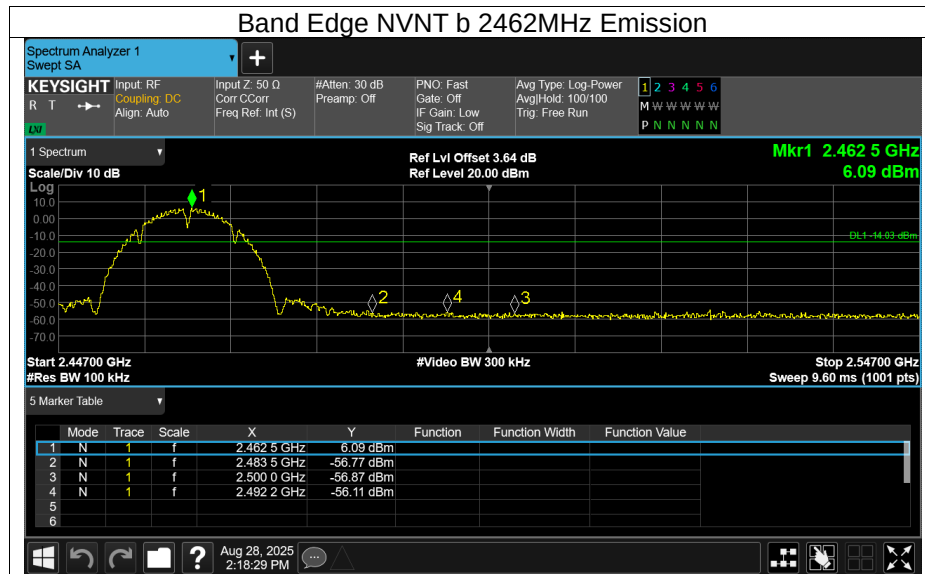


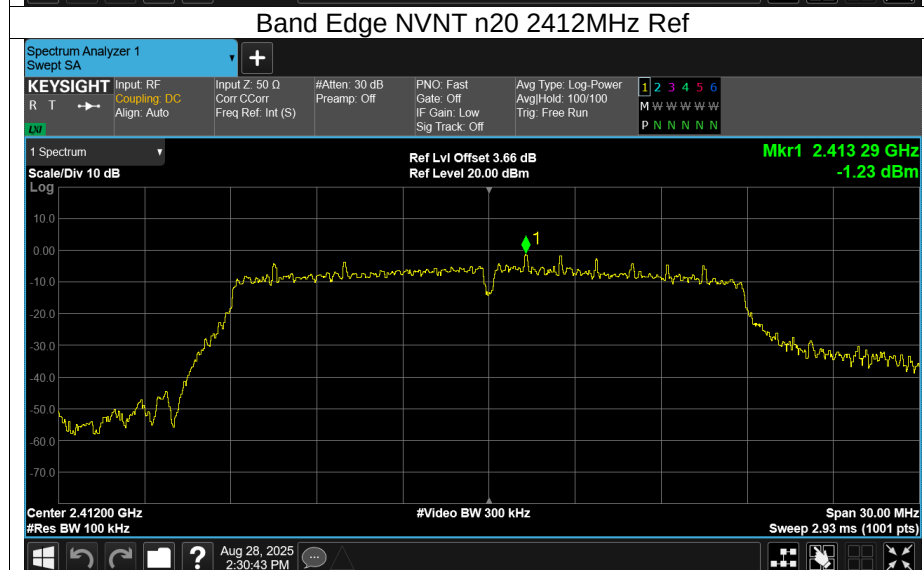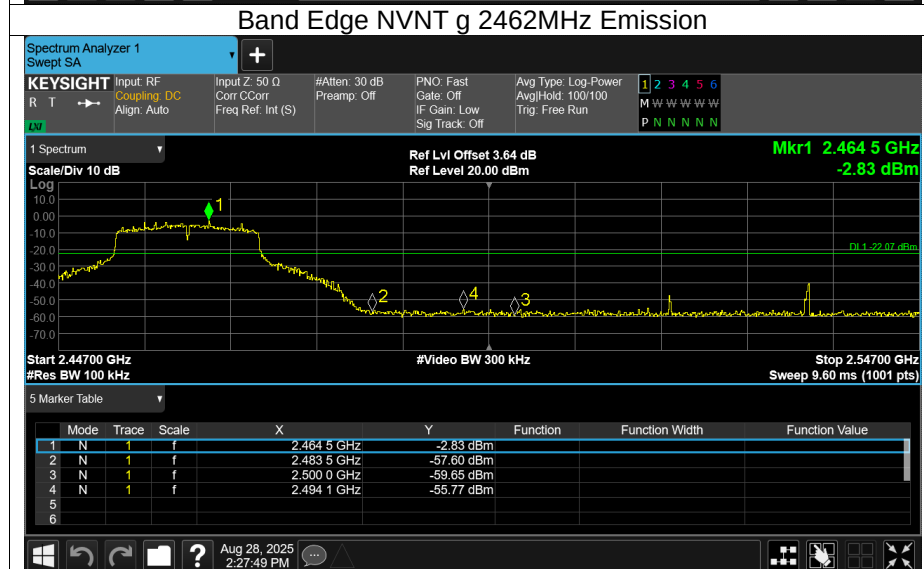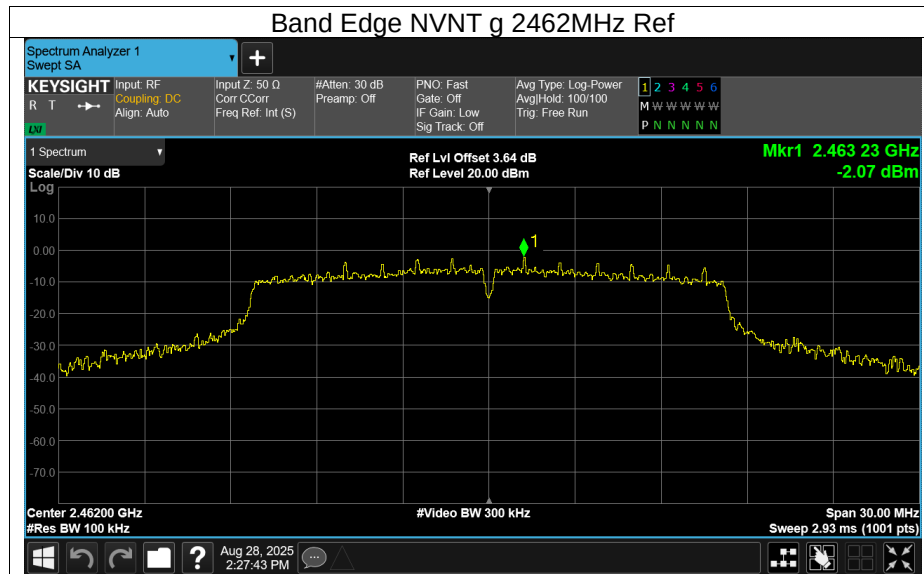


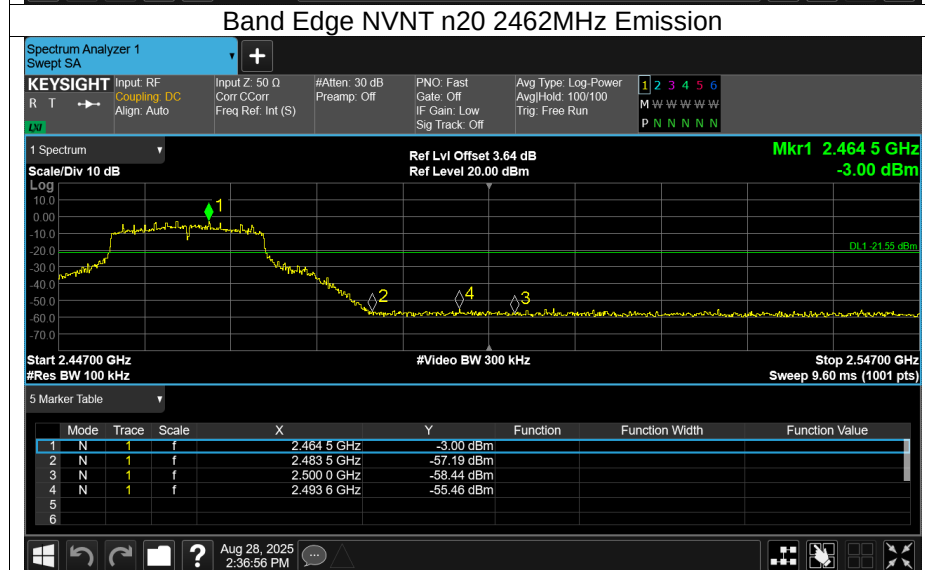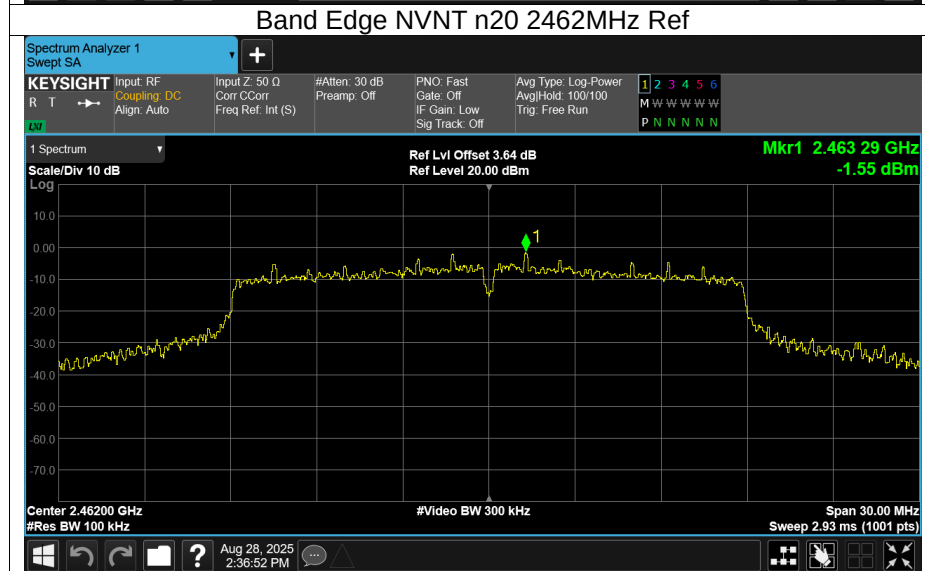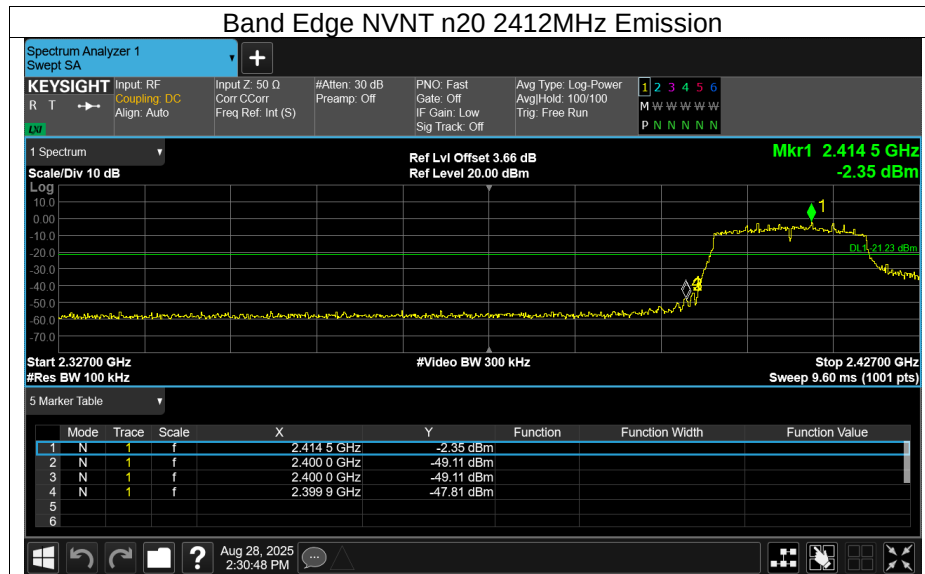

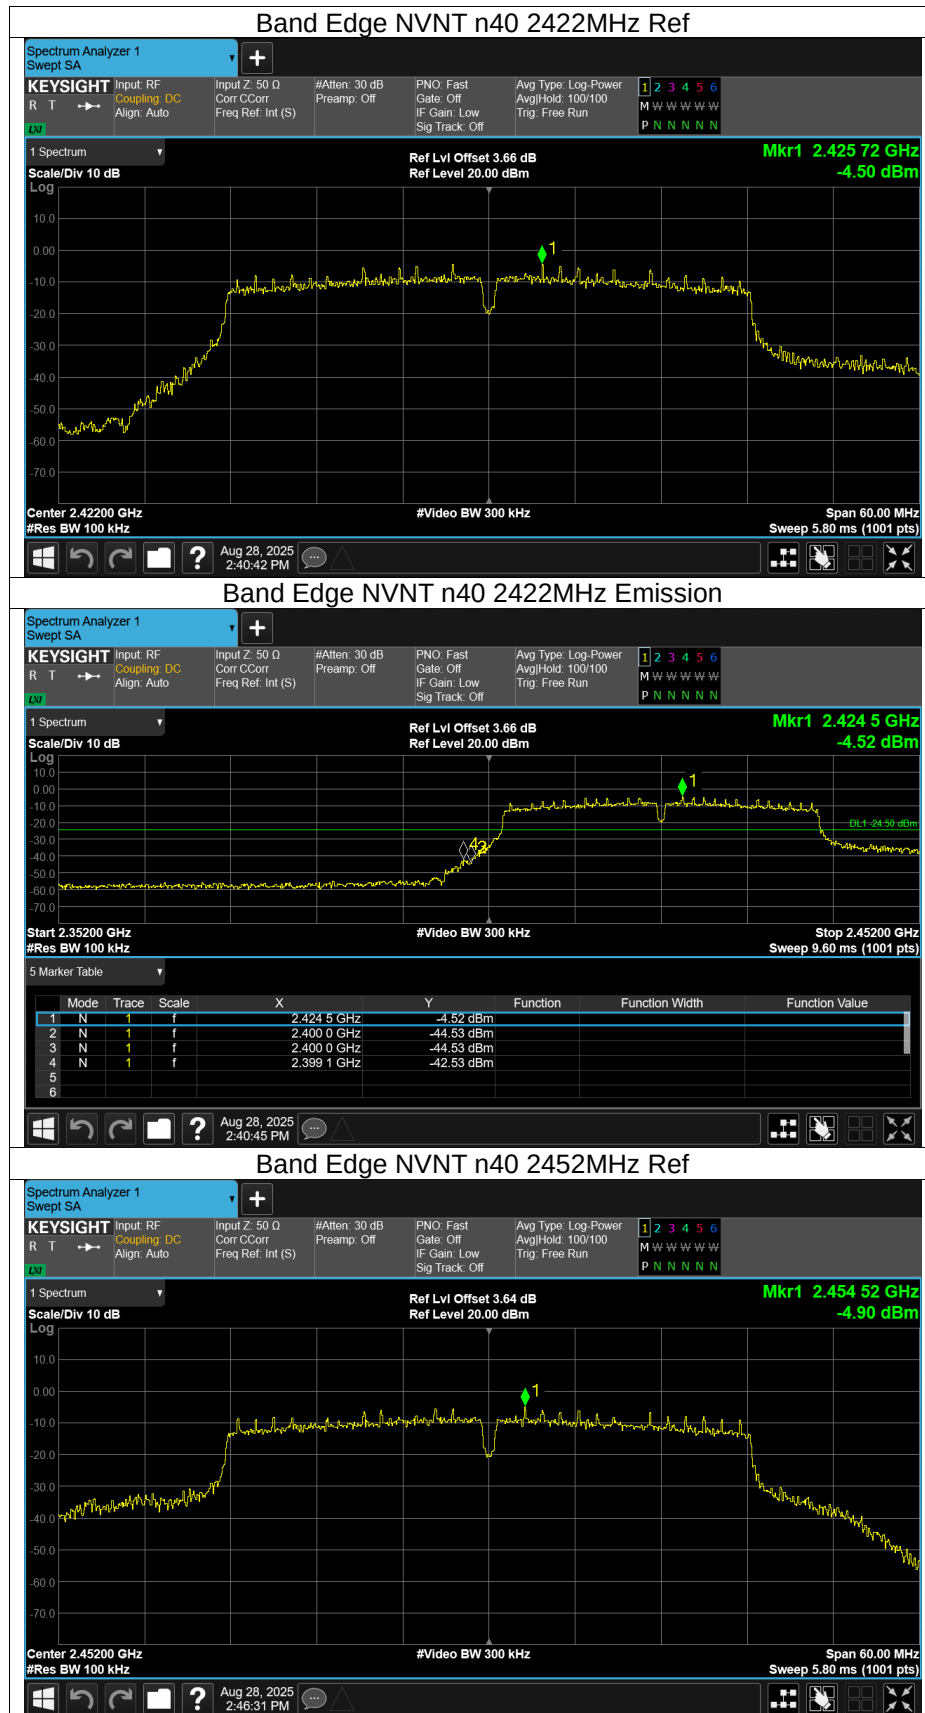

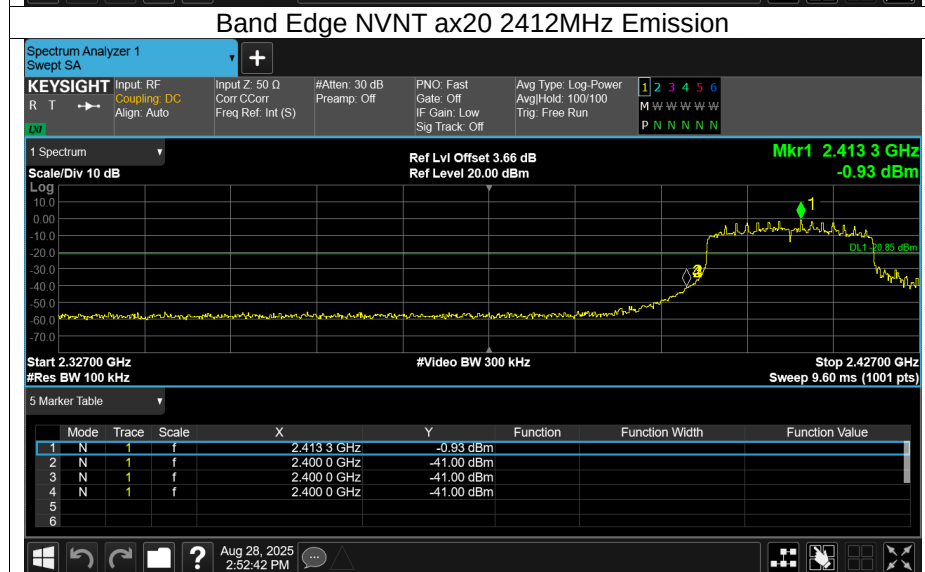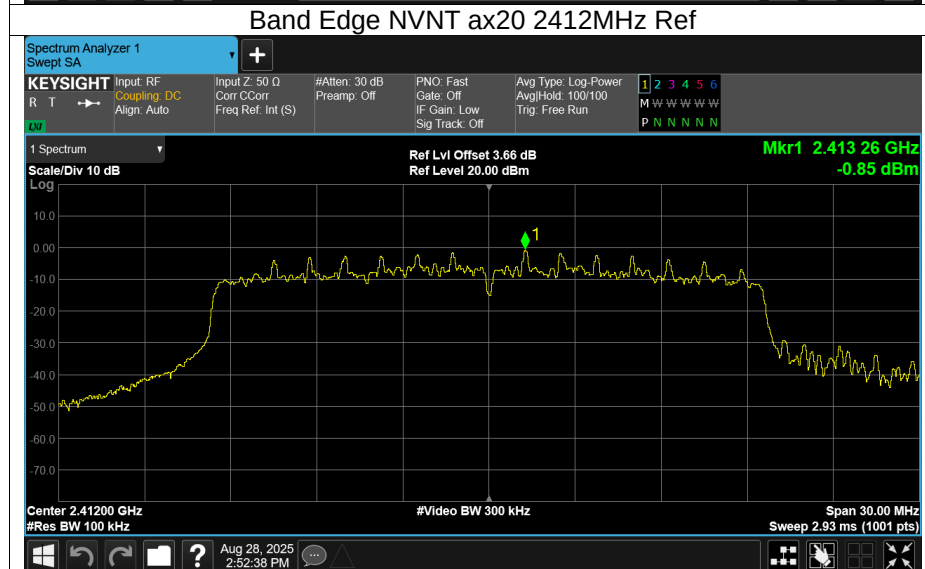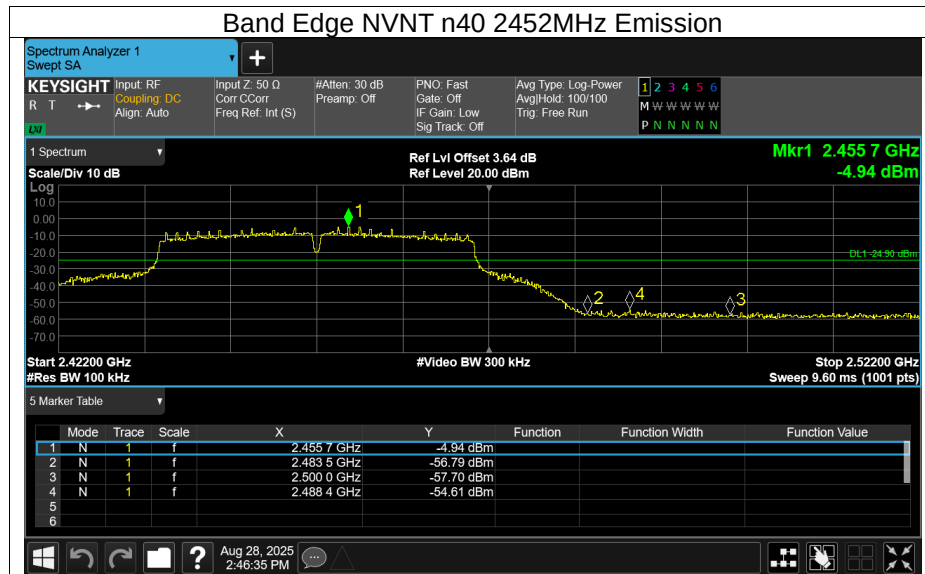

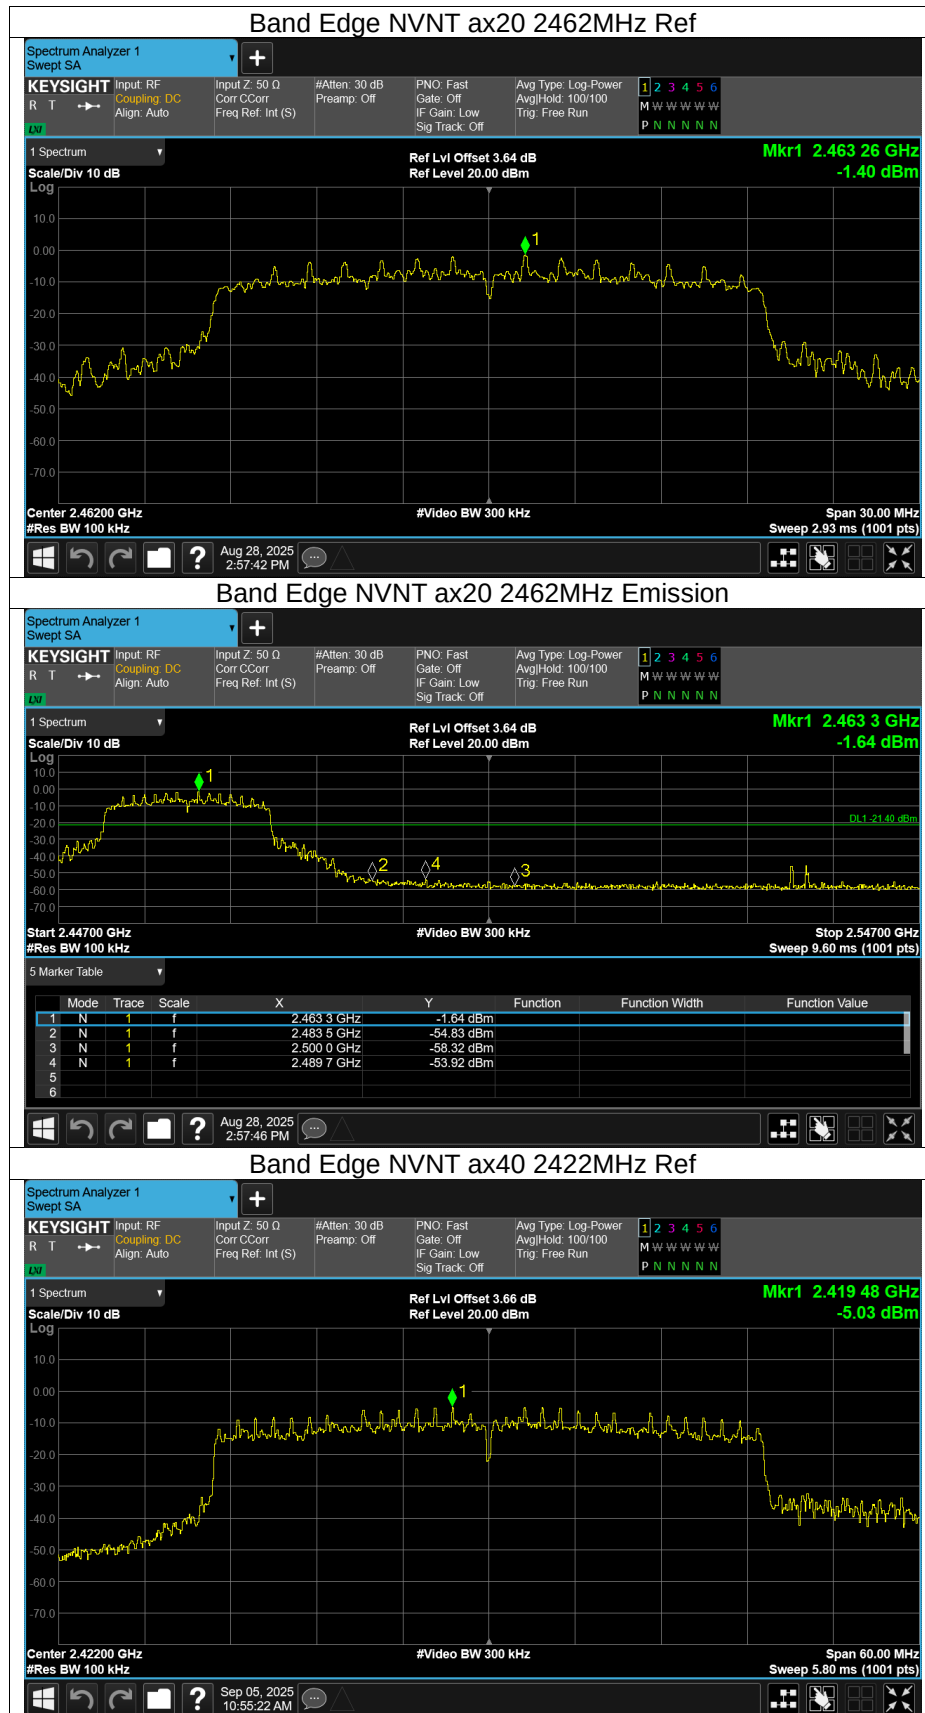




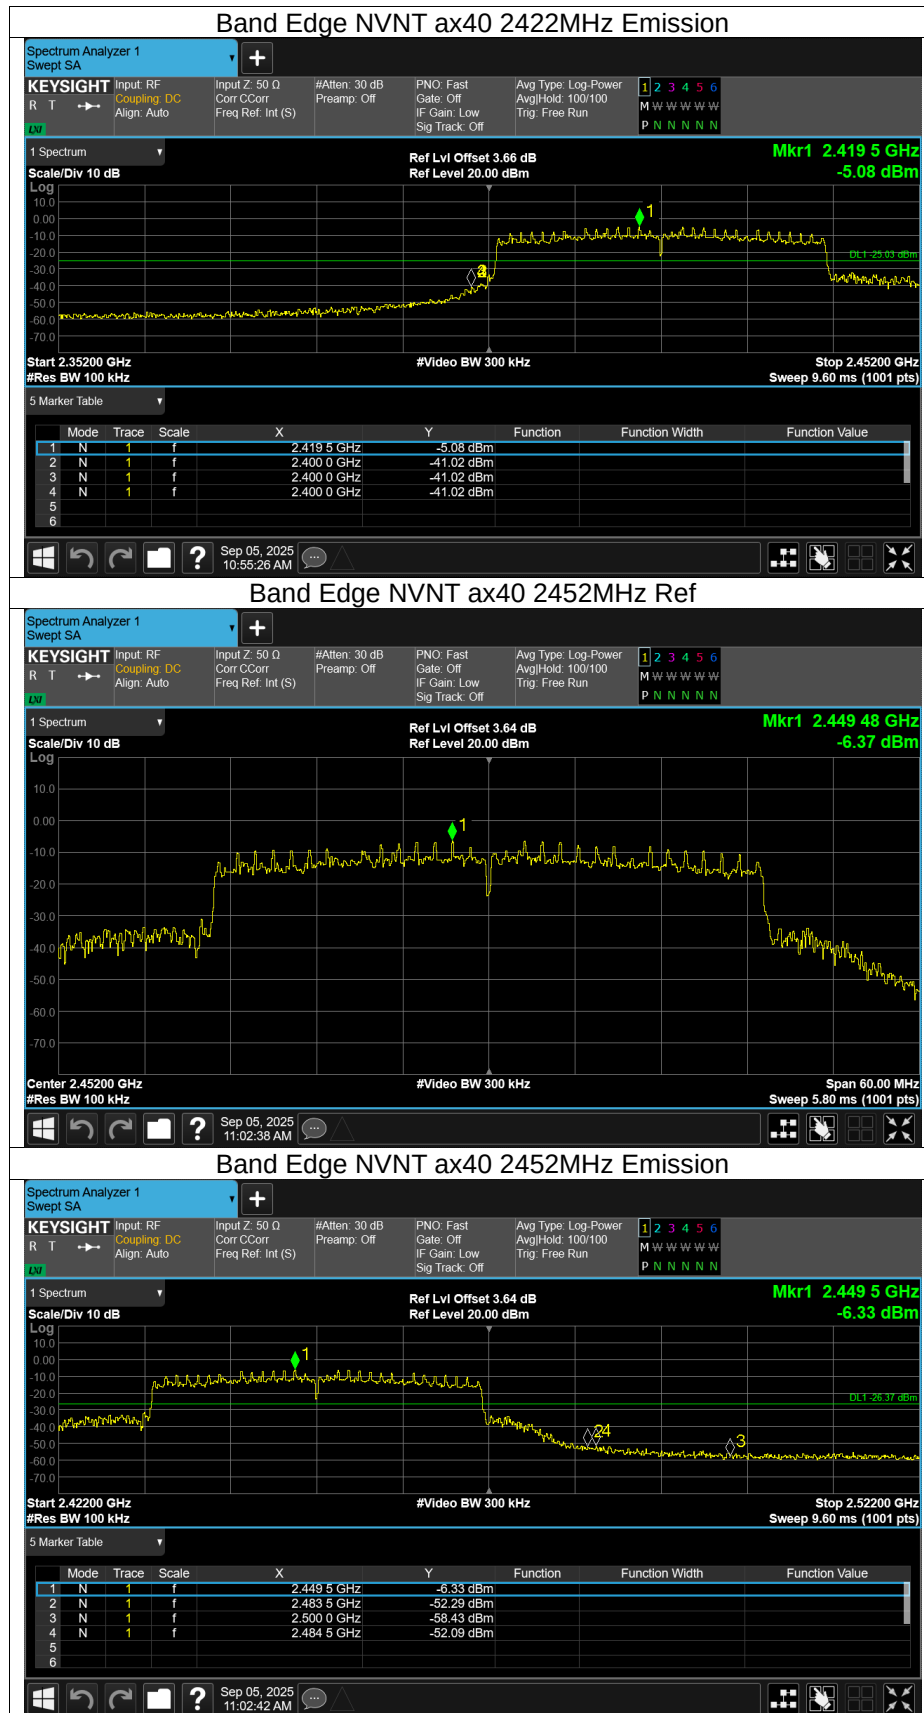








Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	-53.88	-20	Pass
NVNT	b	2437	-53.83	-20	Pass
NVNT	b	2462	-53.38	-20	Pass
NVNT	g	2412	-47.68	-20	Pass
NVNT	g	2437	-45.68	-20	Pass
NVNT	g	2462	-44.06	-20	Pass
NVNT	n20	2412	-44.7	-20	Pass
NVNT	n20	2437	-44.16	-20	Pass
NVNT	n20	2462	-45.31	-20	Pass
NVNT	n40	2422	-42.57	-20	Pass
NVNT	n40	2437	-42.42	-20	Pass
NVNT	n40	2452	-42.05	-20	Pass
NVNT	ax20	2412	-46.36	-20	Pass
NVNT	ax20	2437	-46.12	-20	Pass
NVNT	ax20	2462	-45.83	-20	Pass
NVNT	ax40	2422	-41.25	-20	Pass
NVNT	ax40	2437	-40.86	-20	Pass
NVNT	ax40	2452	-41.45	-20	Pass



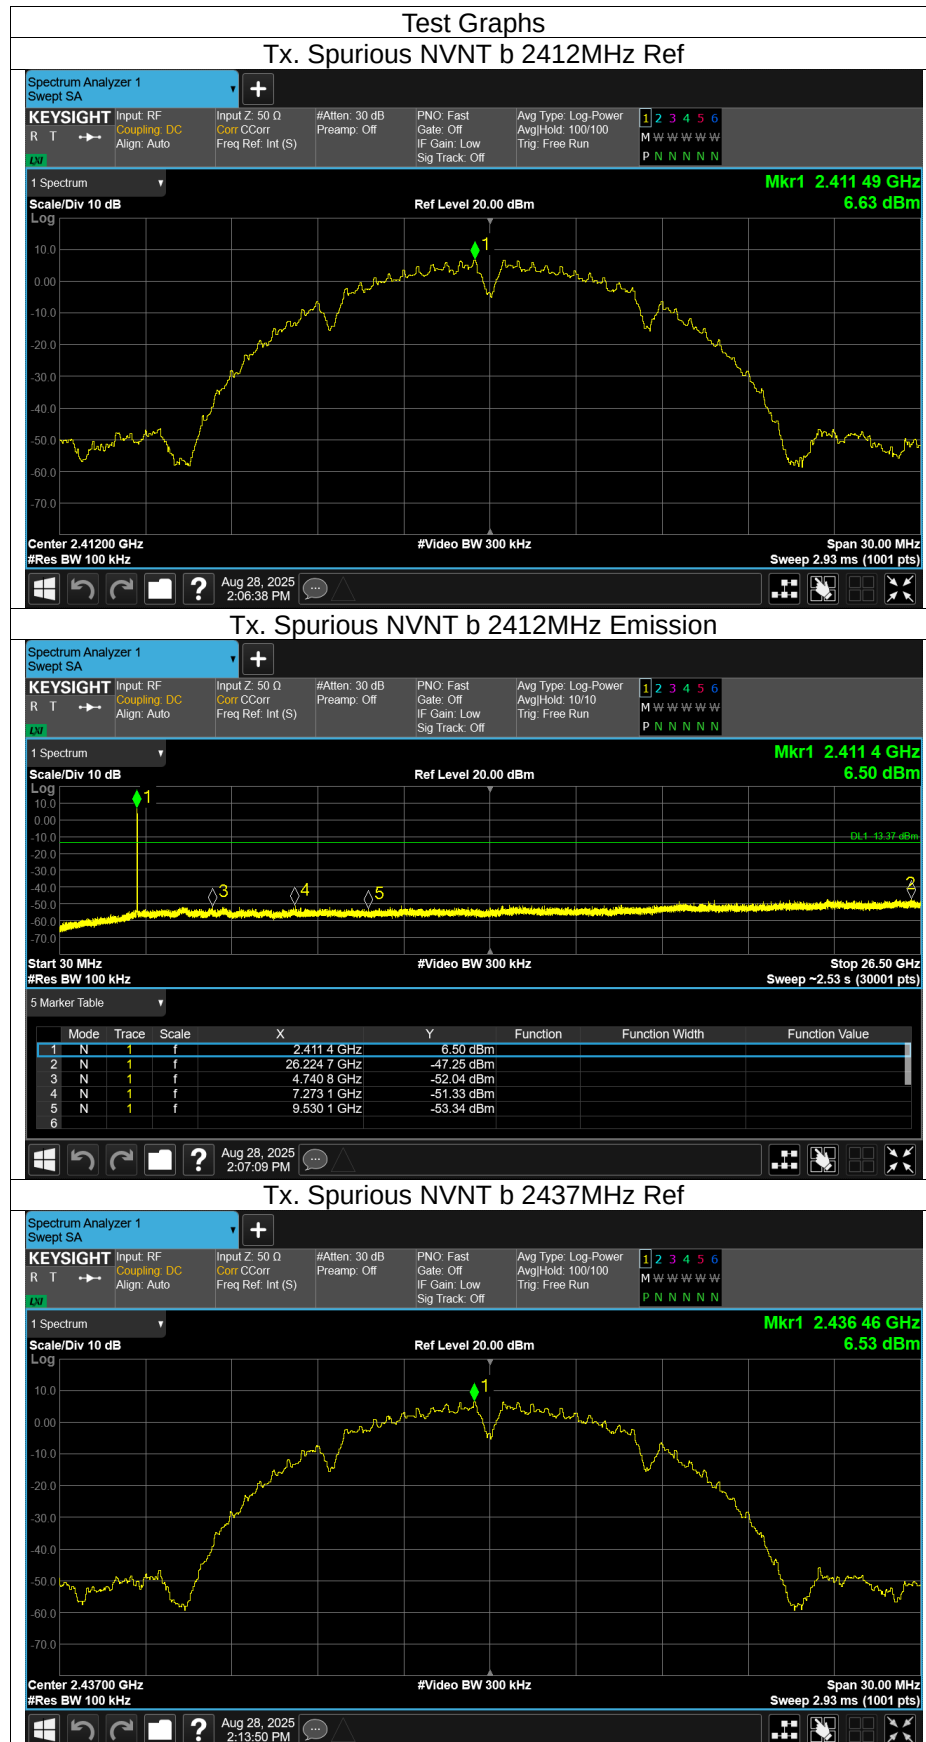


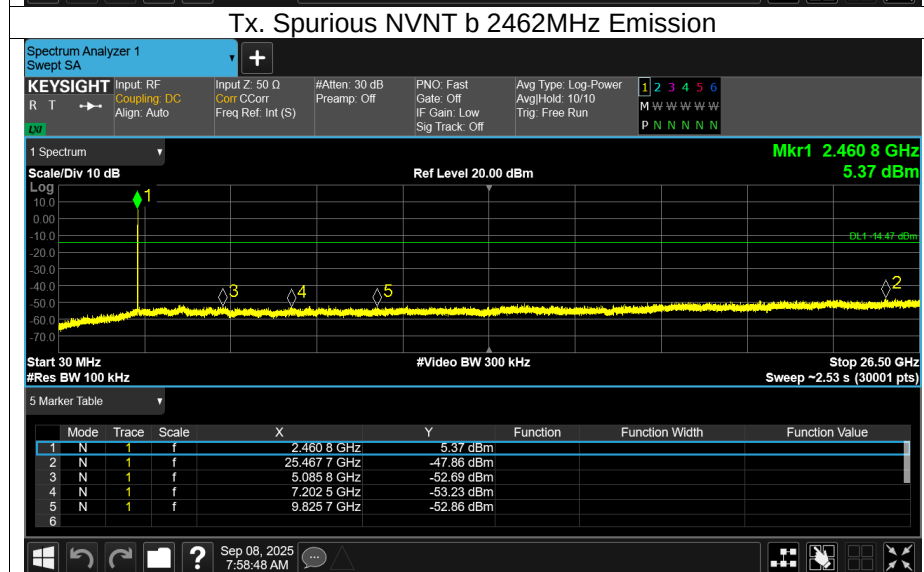
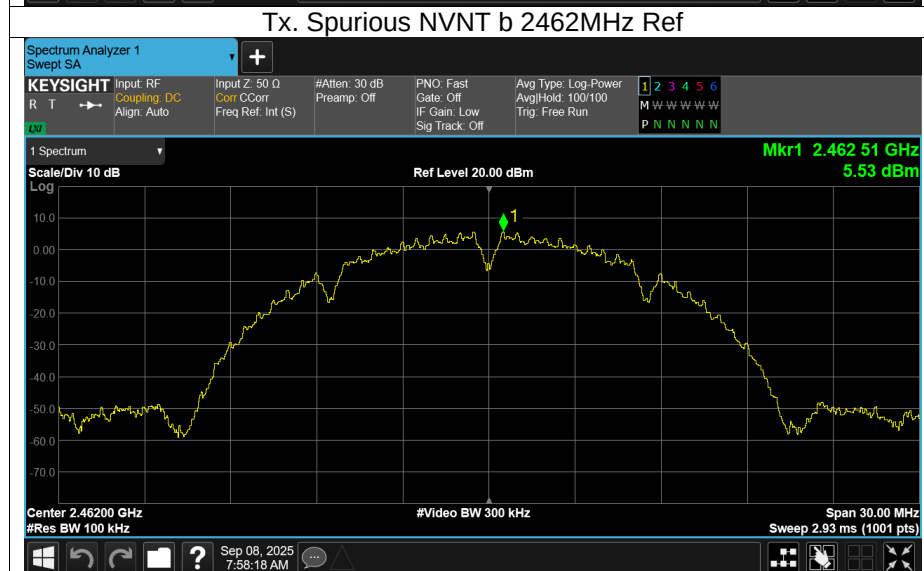
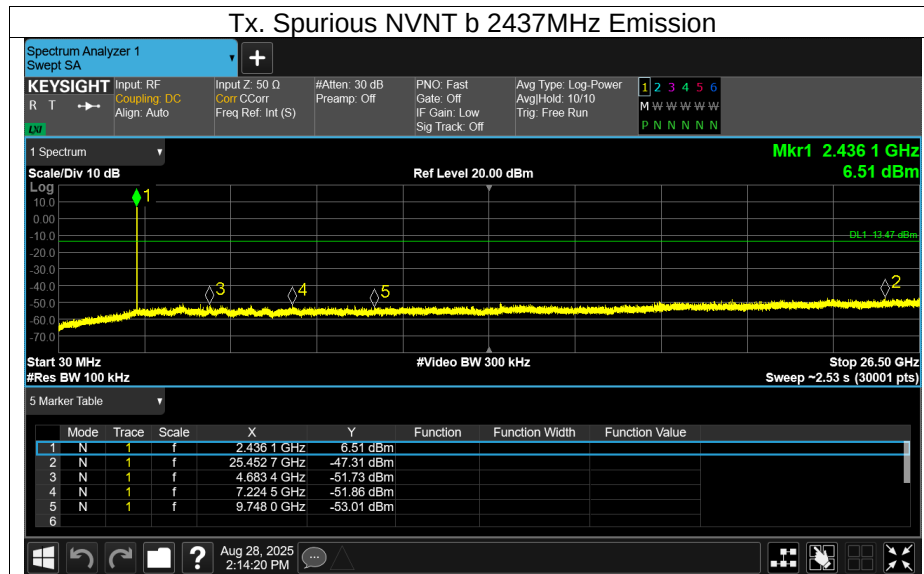




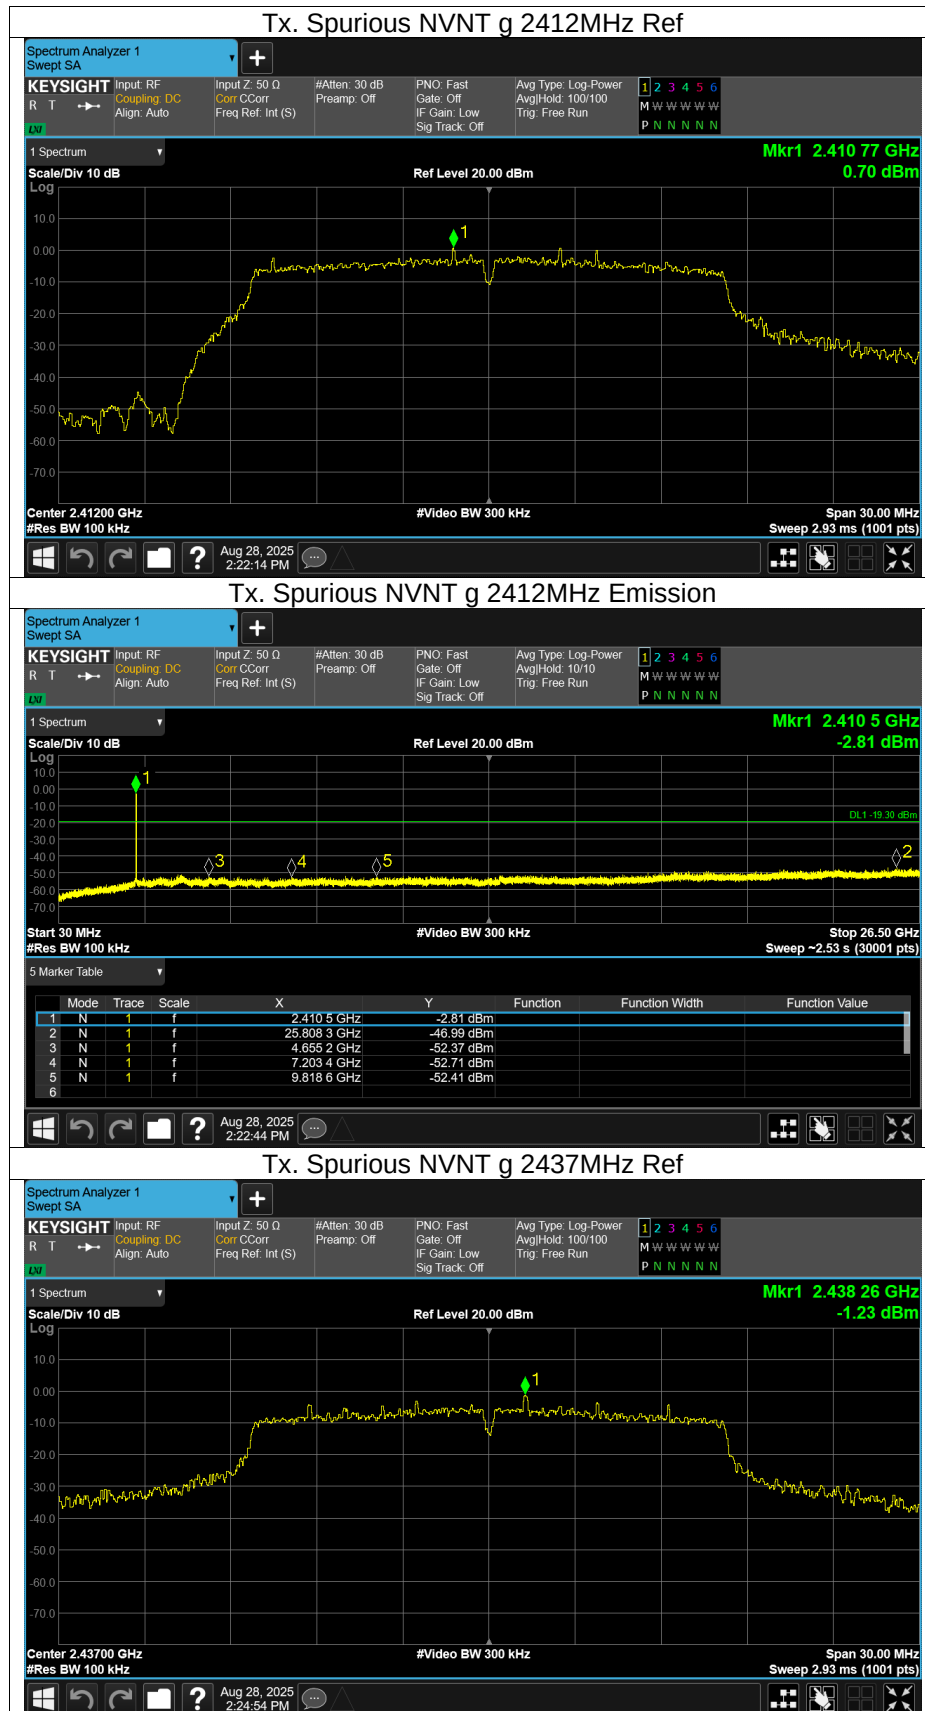


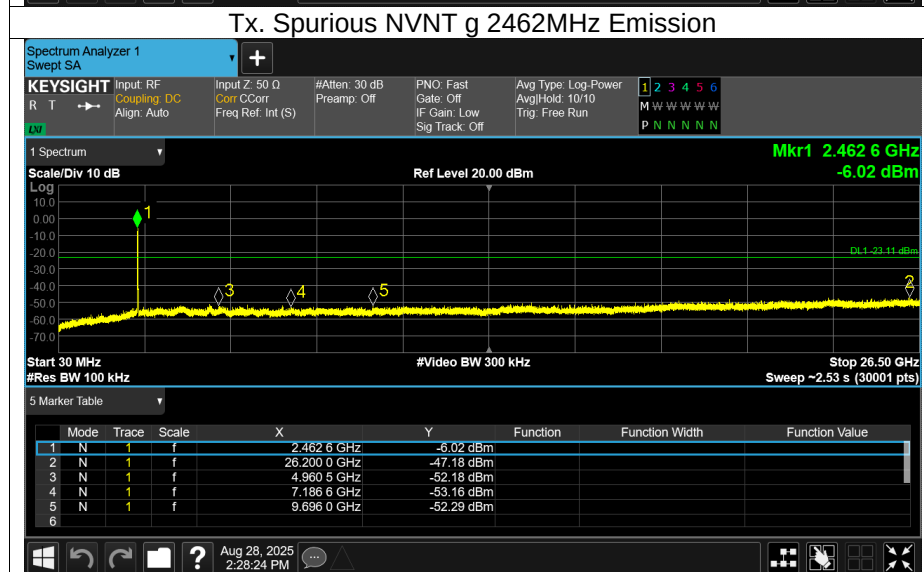
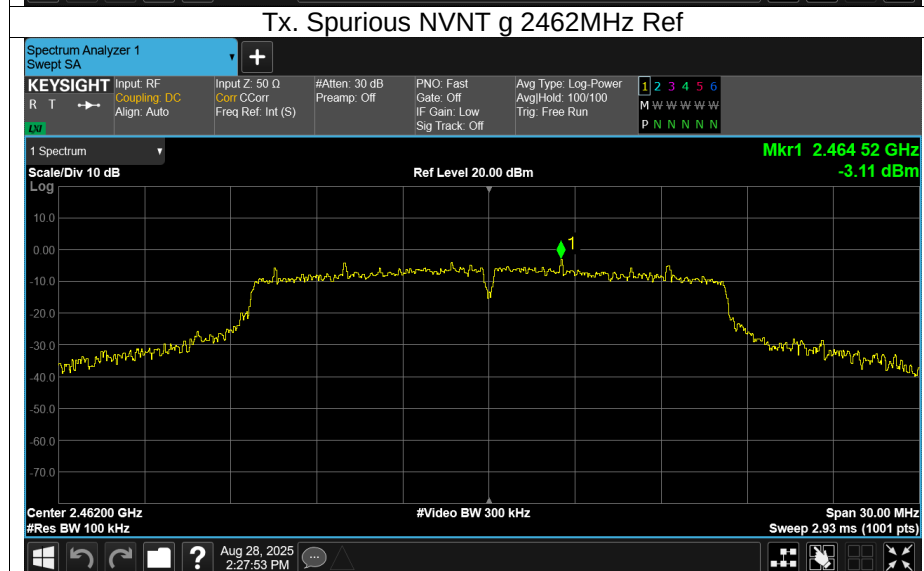
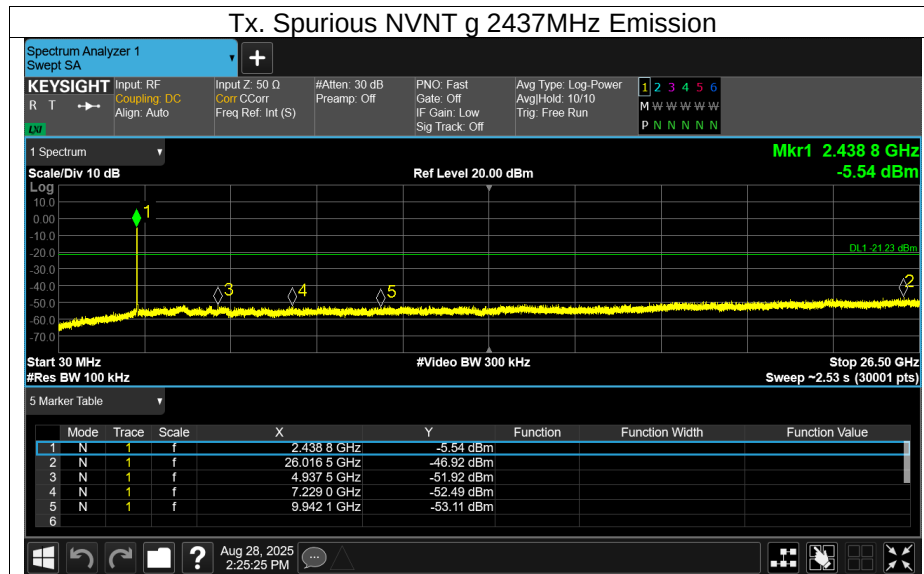


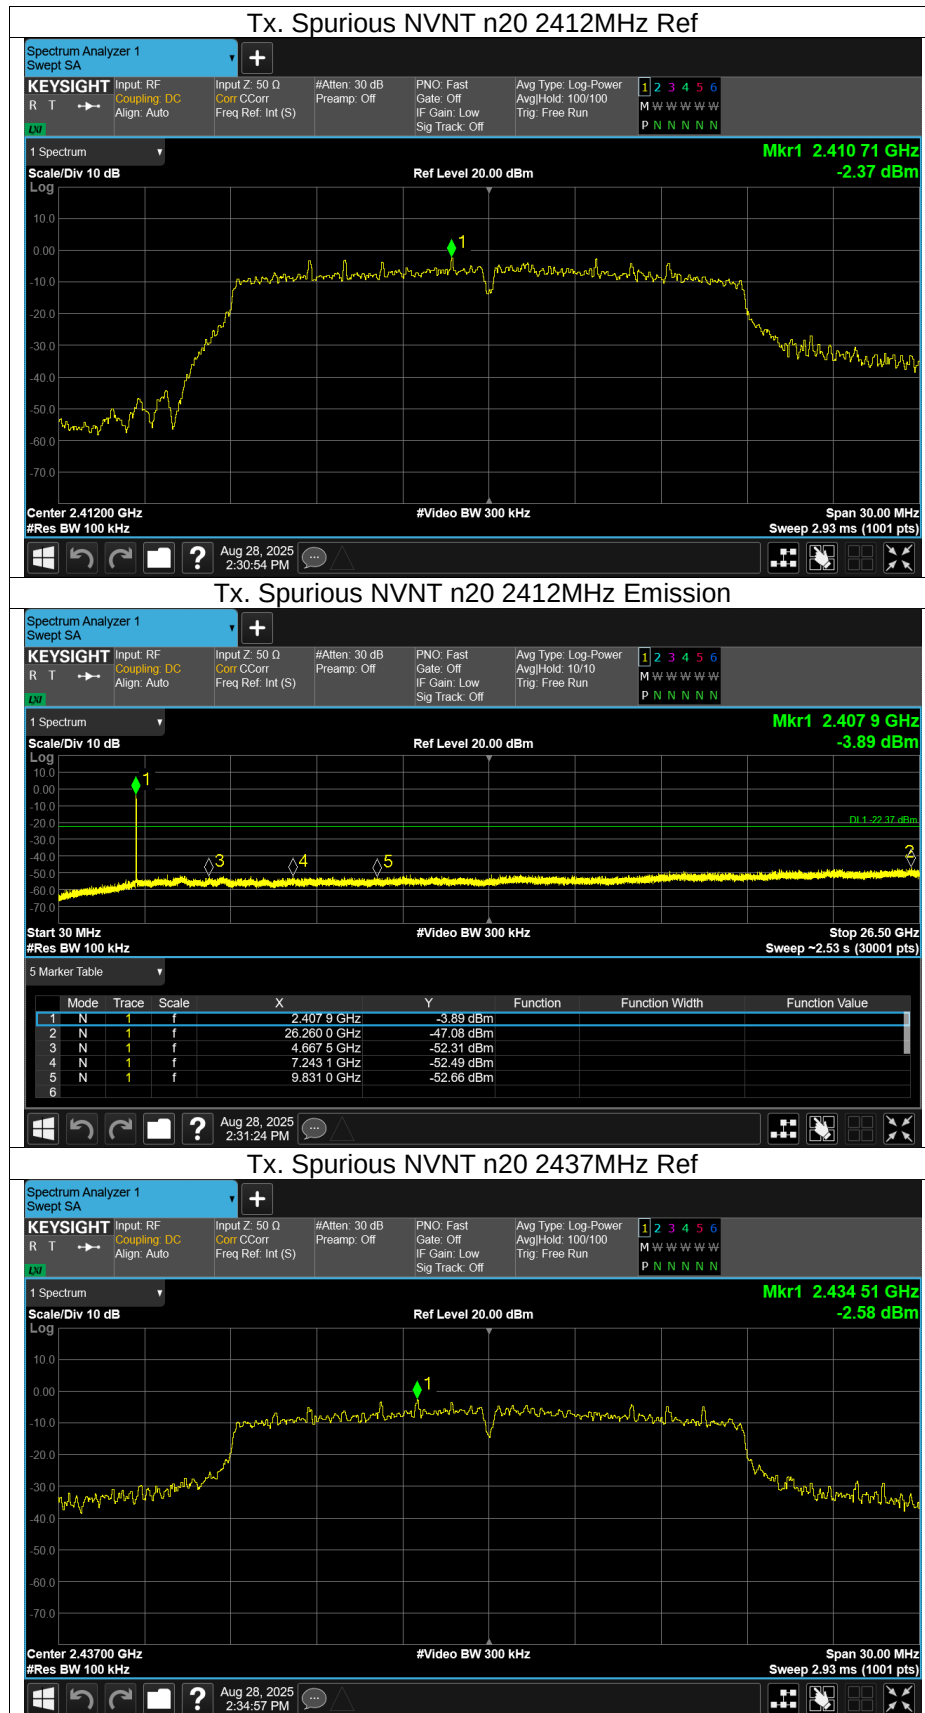


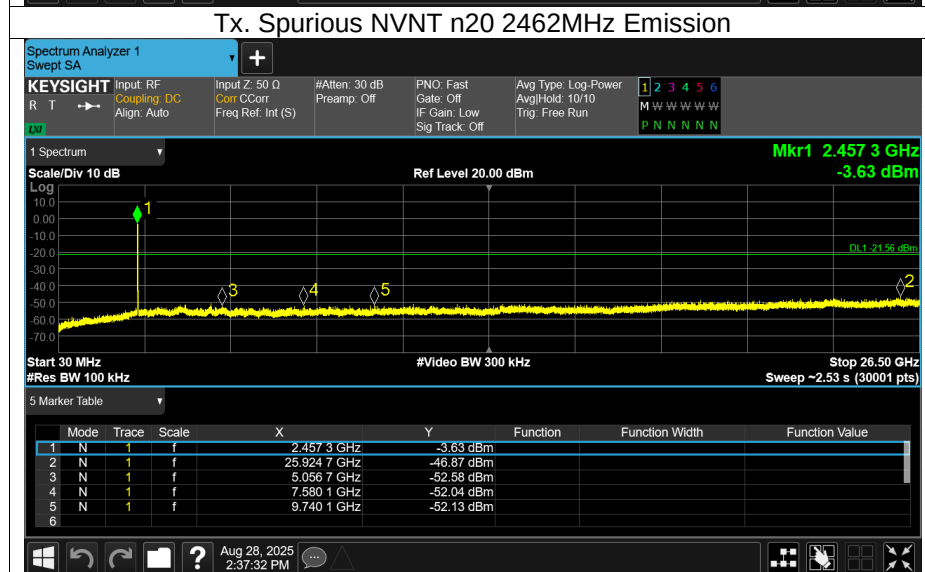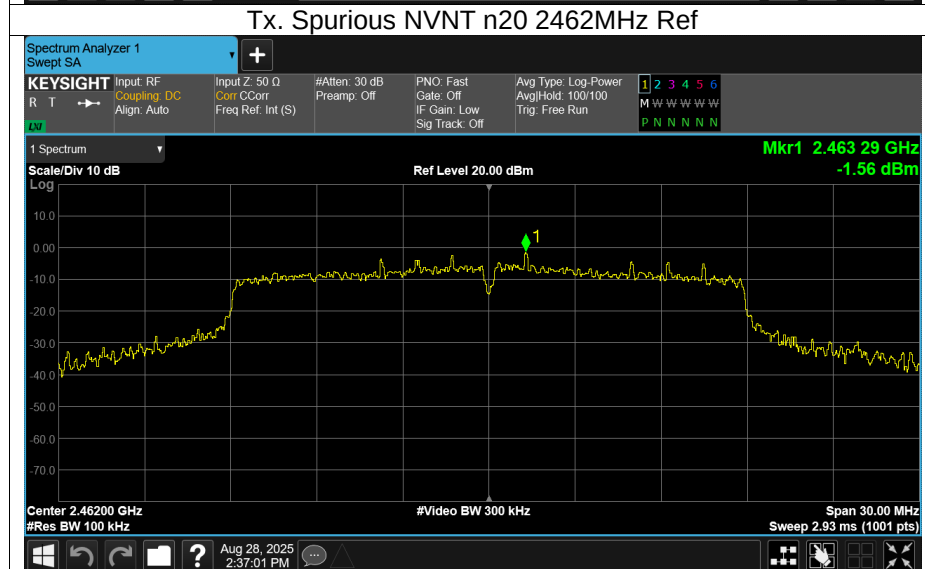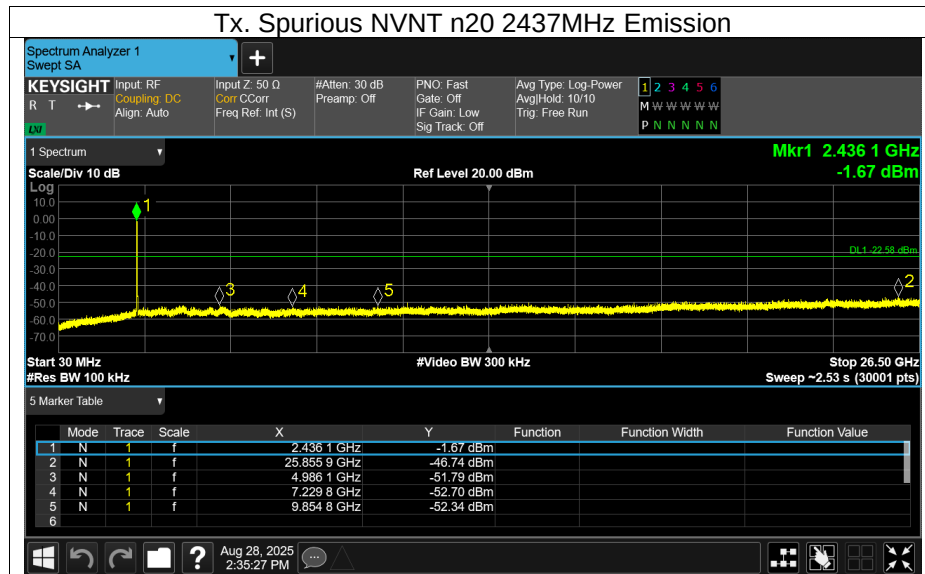


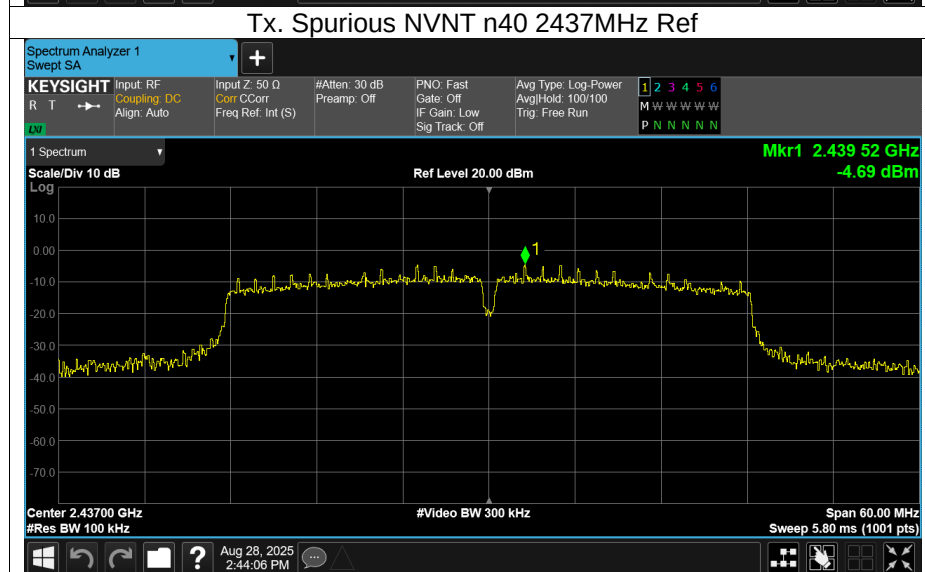
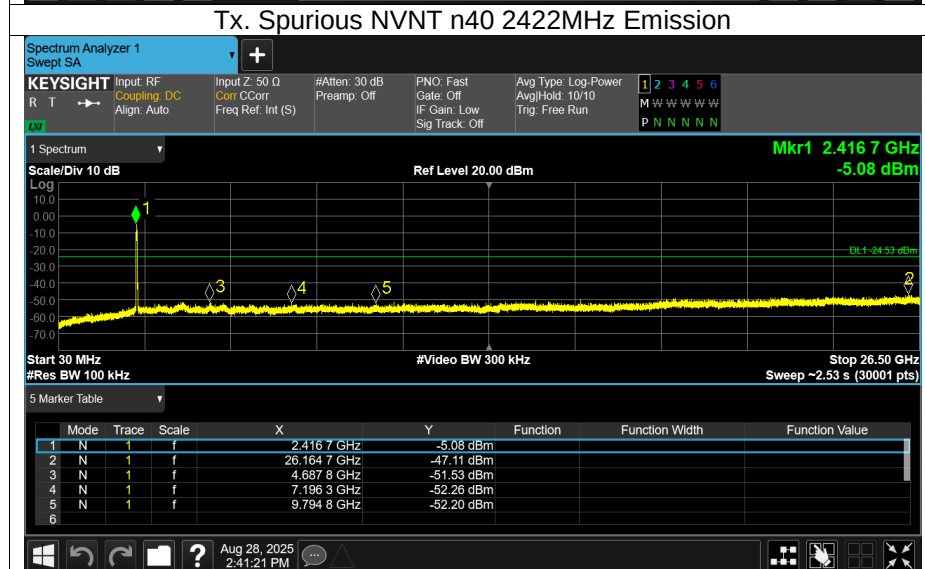
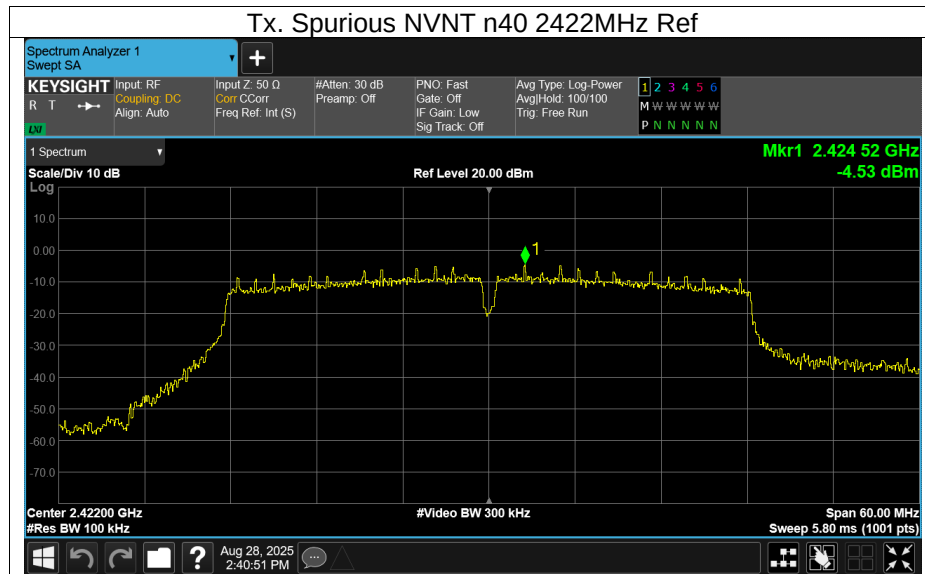


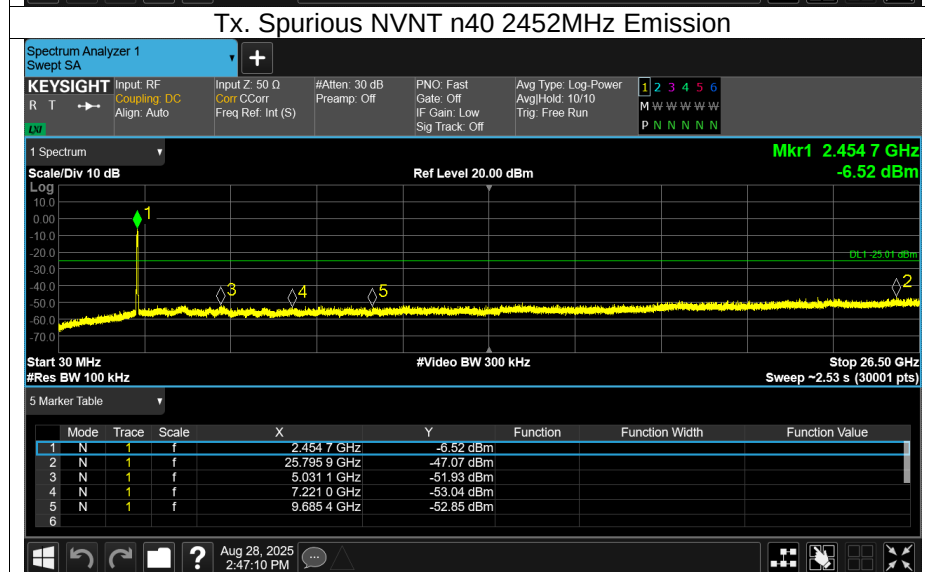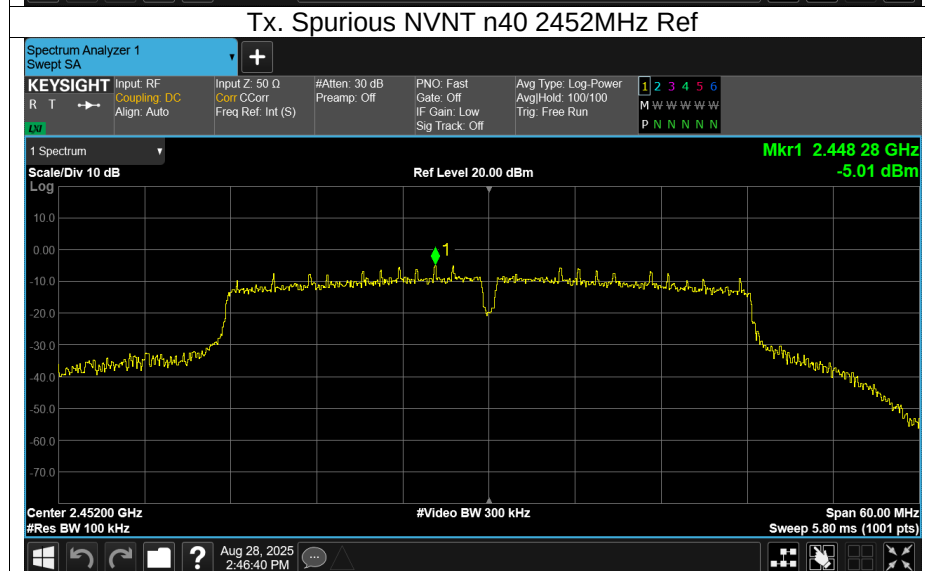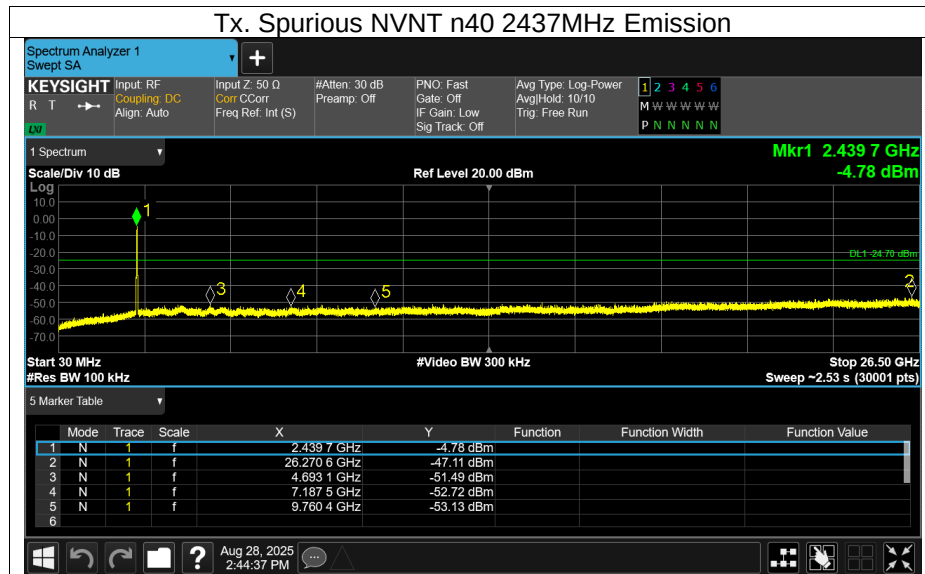

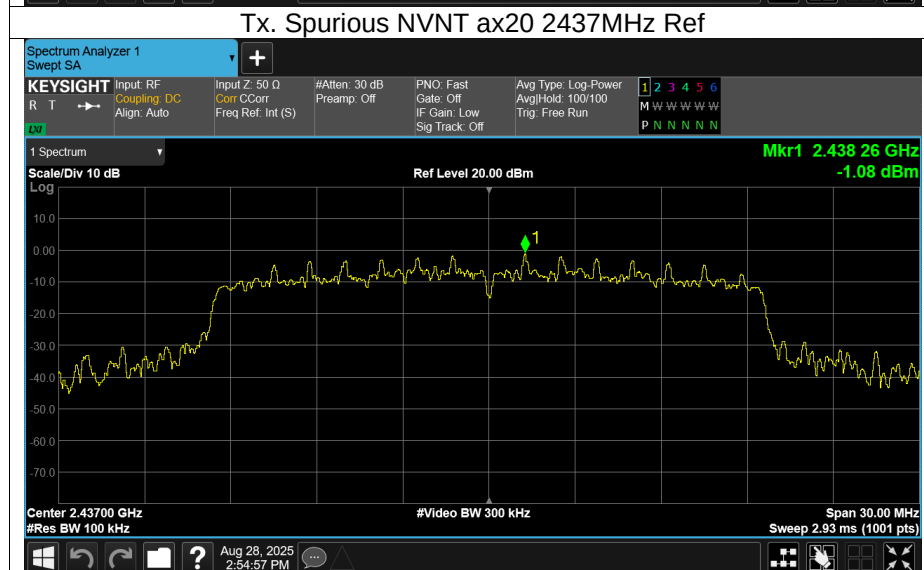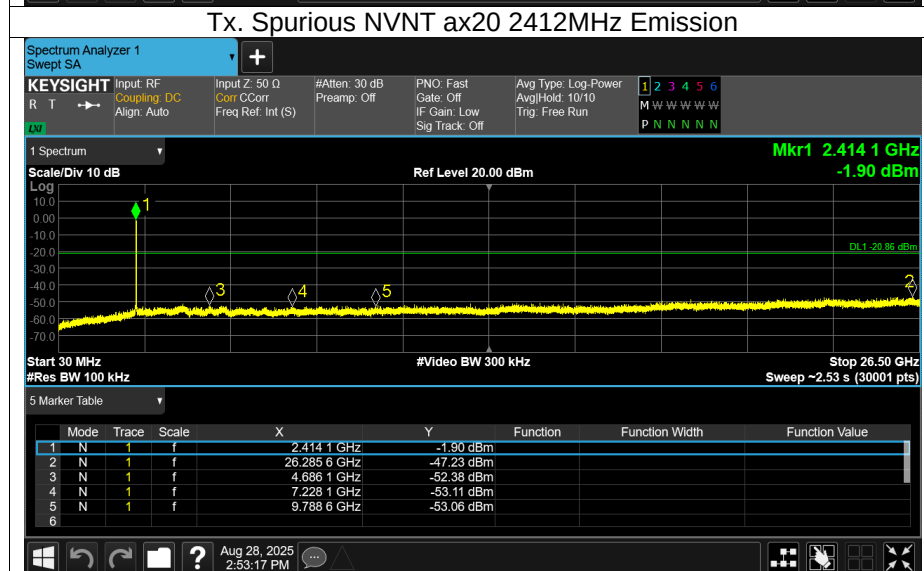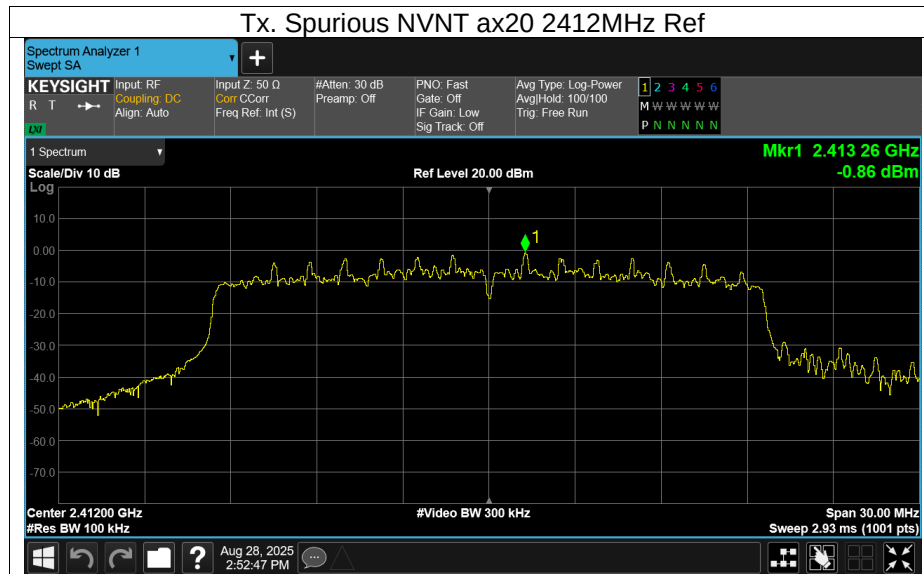

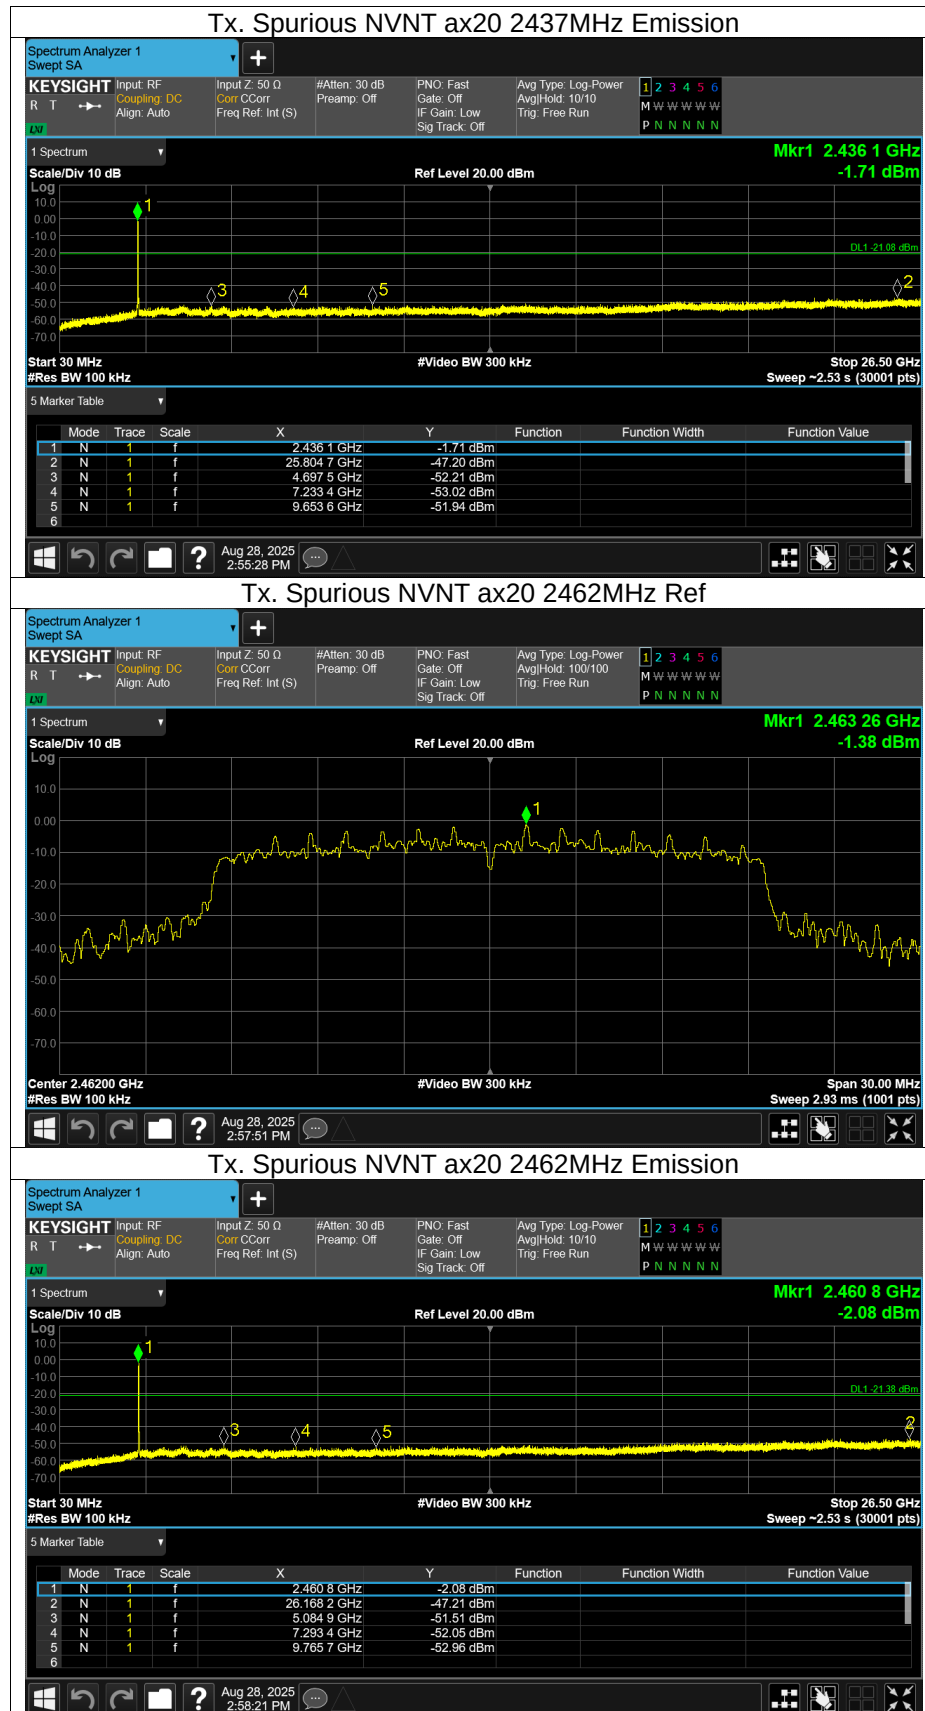

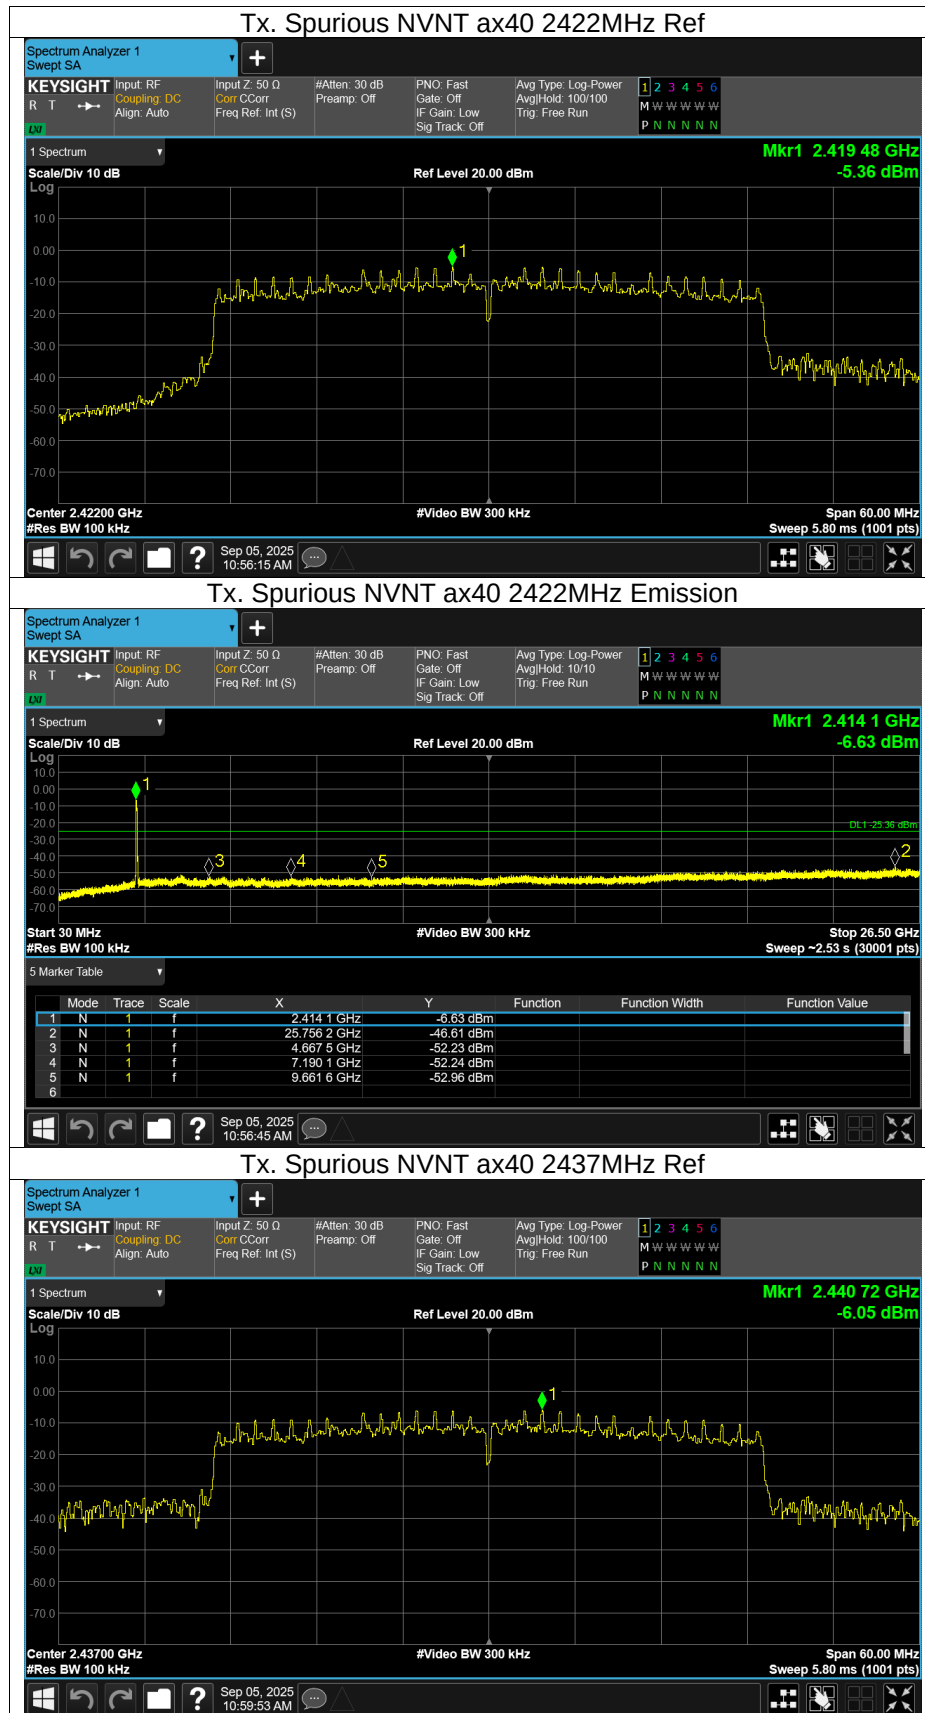

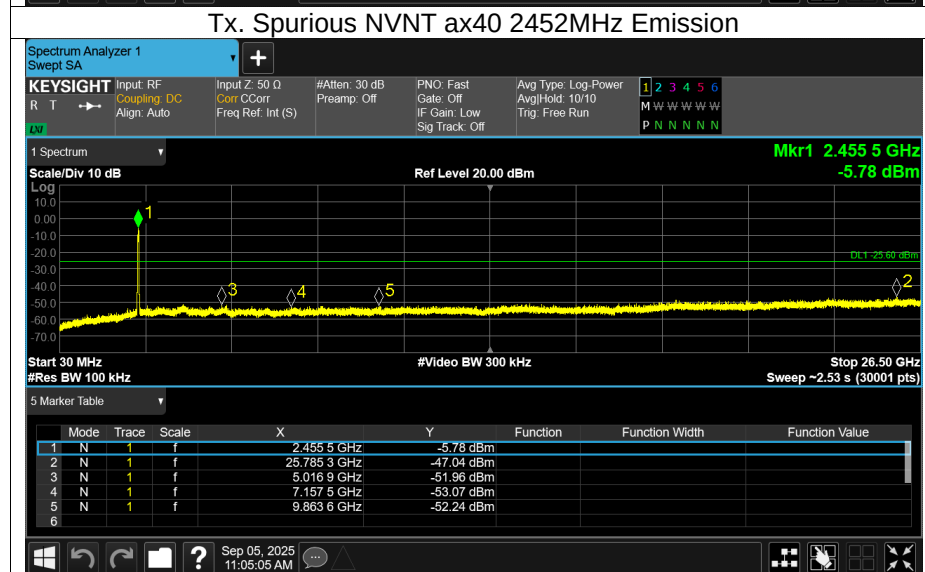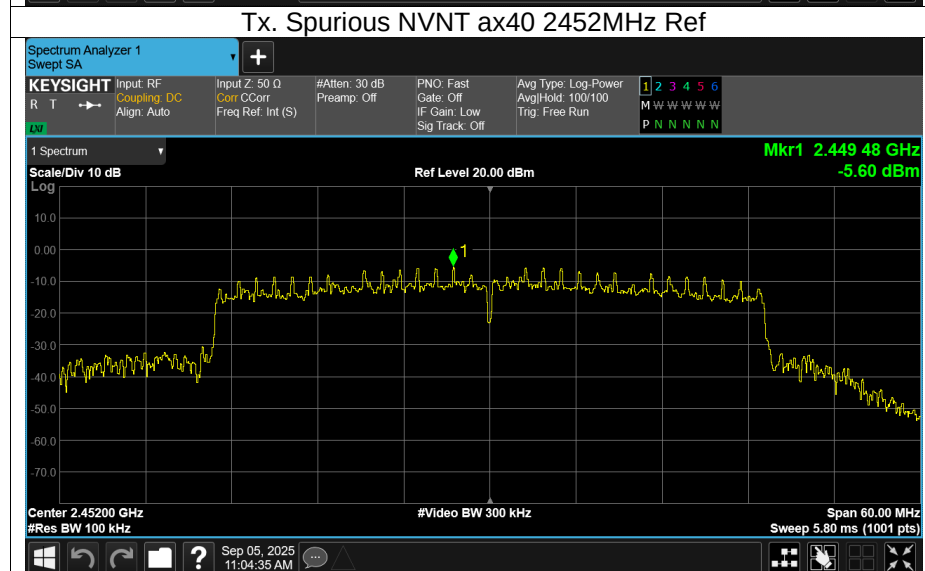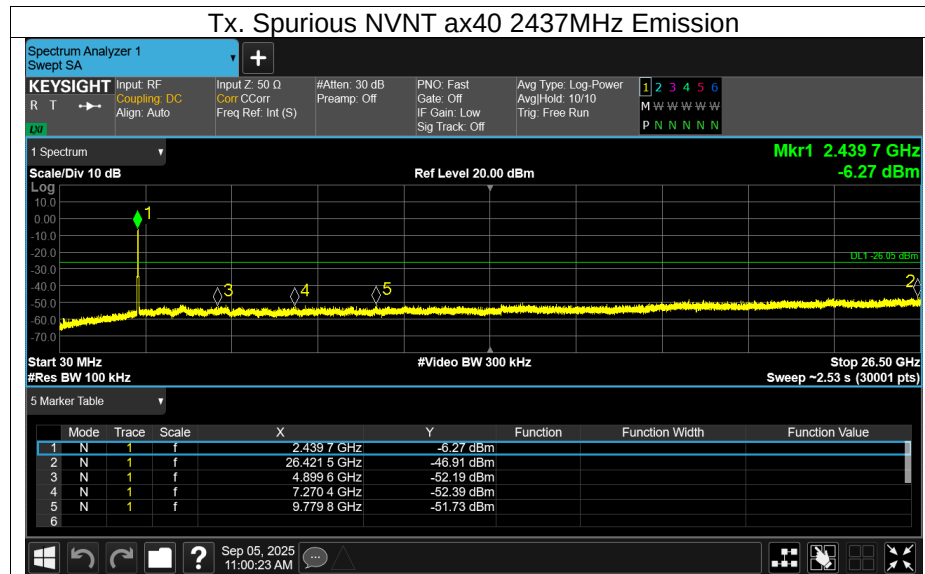



Restrict Band

Condition	Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	b	2412	2310	-47.41	2	49.85	Peak	74	Pass
NVNT	b	2412	2310	-57.14	2	40.12	Average	54	Pass
NVNT	b	2412	2367.915	-43.12	2	54.14	Peak	74	Pass
NVNT	b	2412	2389.677	-56.42	2	40.84	Average	54	Pass
NVNT	b	2412	2390	-47.24	2	50.02	Peak	74	Pass
NVNT	b	2412	2390	-56.41	2	40.85	Average	54	Pass
NVNT	b	2462	2483.5	-44.94	2	52.32	Peak	74	Pass
NVNT	b	2462	2483.5	-56.46	2	40.8	Average	54	Pass
NVNT	b	2462	2490.036	-44.25	2	53.01	Peak	74	Pass
NVNT	b	2462	2483.517	-56.46	2	40.8	Average	54	Pass
NVNT	b	2462	2500	-45.58	2	51.68	Peak	74	Pass
NVNT	b	2462	2500	-56.89	2	40.37	Average	54	Pass
NVNT	g	2412	2310	-47.26	2	50	Peak	74	Pass
NVNT	g	2412	2310	-56.85	2	40.41	Average	54	Pass
NVNT	g	2412	2382.54	-43.68	2	53.58	Peak	74	Pass
NVNT	g	2412	2389.209	-55.65	2	41.61	Average	54	Pass
NVNT	g	2412	2390	-47.18	2	50.08	Peak	74	Pass
NVNT	g	2412	2390	-55.66	2	41.6	Average	54	Pass
NVNT	g	2462	2483.5	-46.89	2	50.37	Peak	74	Pass
NVNT	g	2462	2483.5	-55.88	2	41.38	Average	54	Pass
NVNT	g	2462	2487.81	-44.33	2	52.93	Peak	74	Pass
NVNT	g	2462	2483.57	-55.85	2	41.41	Average	54	Pass
NVNT	g	2462	2500	-46.8	2	50.46	Peak	74	Pass
NVNT	g	2462	2500	-56.42	2	40.84	Average	54	Pass
NVNT	n20	2412	2310	-47.21	2	50.05	Peak	74	Pass
NVNT	n20	2412	2310	-56.95	2	40.31	Average	54	Pass
NVNT	n20	2412	2329.539	-43.94	2	53.32	Peak	74	Pass
NVNT	n20	2412	2389.677	-55.54	2	41.72	Average	54	Pass
NVNT	n20	2412	2390	-46.86	2	50.4	Peak	74	Pass
NVNT	n20	2412	2390	-55.66	2	41.6	Average	54	Pass
NVNT	n20	2462	2483.5	-46.1	2	51.16	Peak	74	Pass
NVNT	n20	2462	2483.5	-55.61	2	41.65	Average	54	Pass
NVNT	n20	2462	2483.941	-44.36	2	52.9	Peak	74	Pass
NVNT	n20	2462	2483.517	-55.61	2	41.65	Average	54	Pass
NVNT	n20	2462	2500	-48.95	2	48.31	Peak	74	Pass
NVNT	n20	2462	2500	-56.54	2	40.72	Average	54	Pass
NVNT	n40	2422	2310	-46.53	2	50.73	Peak	74	Pass
NVNT	n40	2422	2310	-56.77	2	40.49	Average	54	Pass
NVNT	n40	2422	2381.142	-43.22	2	54.04	Peak	74	Pass
NVNT	n40	2422	2389.946	-54.04	2	43.22	Average	54	Pass
NVNT	n40	2422	2390	-45.45	2	51.81	Peak	74	Pass
NVNT	n40	2422	2390	-54.47	2	42.79	Average	54	Pass
NVNT	n40	2452	2483.5	-43.76	2	53.5	Peak	74	Pass
NVNT	n40	2452	2483.5	-55.08	2	42.18	Average	54	Pass
NVNT	n40	2452	2485.336	-43.5	2	53.76	Peak	74	Pass
NVNT	n40	2452	2484.166	-54.67	2	42.59	Average	54	Pass
NVNT	n40	2452	2500	-47.68	2	49.58	Peak	74	Pass
NVNT	n40	2452	2500	-56.09	2	41.17	Average	54	Pass
NVNT	ax20	2412	2310	-48.46	2	48.8	Peak	74	Pass
NVNT	ax20	2412	2310	-54.74	2	42.52	Average	54	Pass
NVNT	ax20	2412	2388.156	-41.87	2	55.39	Peak	74	Pass
NVNT	ax20	2412	2387.103	-53.44	2	43.82	Average	54	Pass
NVNT	ax20	2412	2390	-39.72	2	57.54	Peak	74	Pass
NVNT	ax20	2412	2390	-53.9	2	43.36	Average	54	Pass
NVNT	ax20	2462	2483.5	-37.75	2	59.51	Peak	74	Pass
NVNT	ax20	2462	2483.5	-54	2	43.26	Average	54	Pass
NVNT	ax20	2462	2483.941	-35.57	2	61.69	Peak	74	Pass
NVNT	ax20	2462	2484.153	-53.42	2	43.84	Average	54	Pass
NVNT	ax20	2462	2500	-47.76	2	49.5	Peak	74	Pass



NVNT	ax20	2462	2500	-55.46	2	41.8	Average	54	Pass
NVNT	ax40	2422	2310	-47	2	50.26	Peak	74	Pass
NVNT	ax40	2422	2310	-55.29	2	41.97	Average	54	Pass
NVNT	ax40	2422	2389.804	-33.37	2	63.89	Peak	74	Pass
NVNT	ax40	2422	2389.236	-51.96	2	45.3	Average	54	Pass
NVNT	ax40	2422	2390	-43.99	2	53.27	Peak	74	Pass
NVNT	ax40	2422	2390	-52.58	2	44.68	Average	54	Pass