





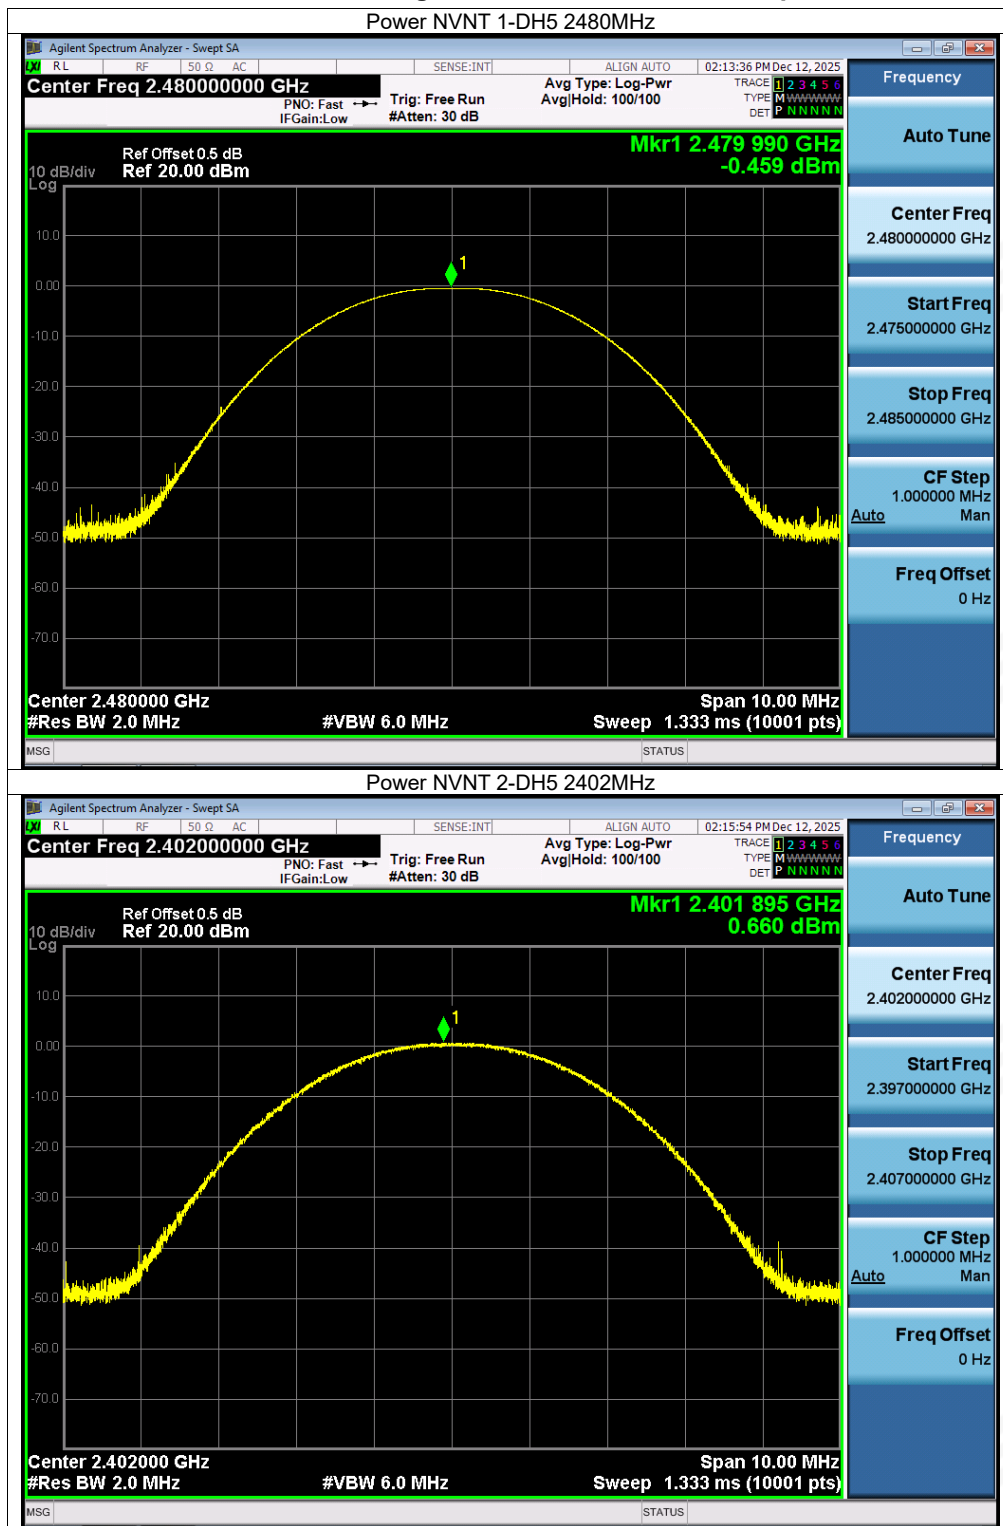

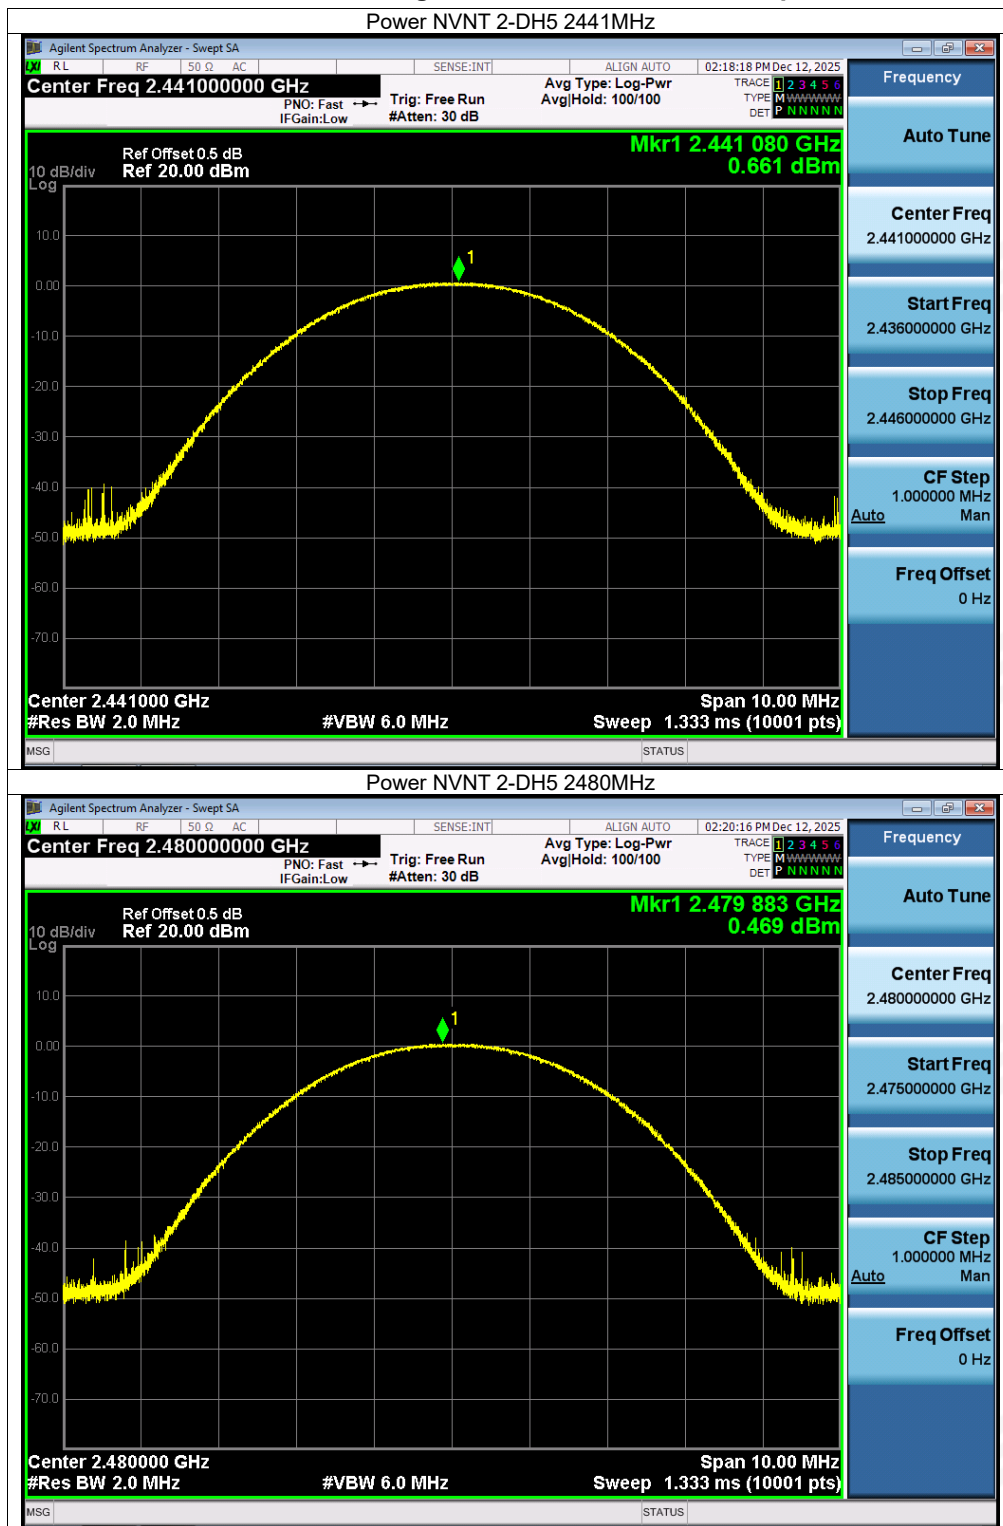

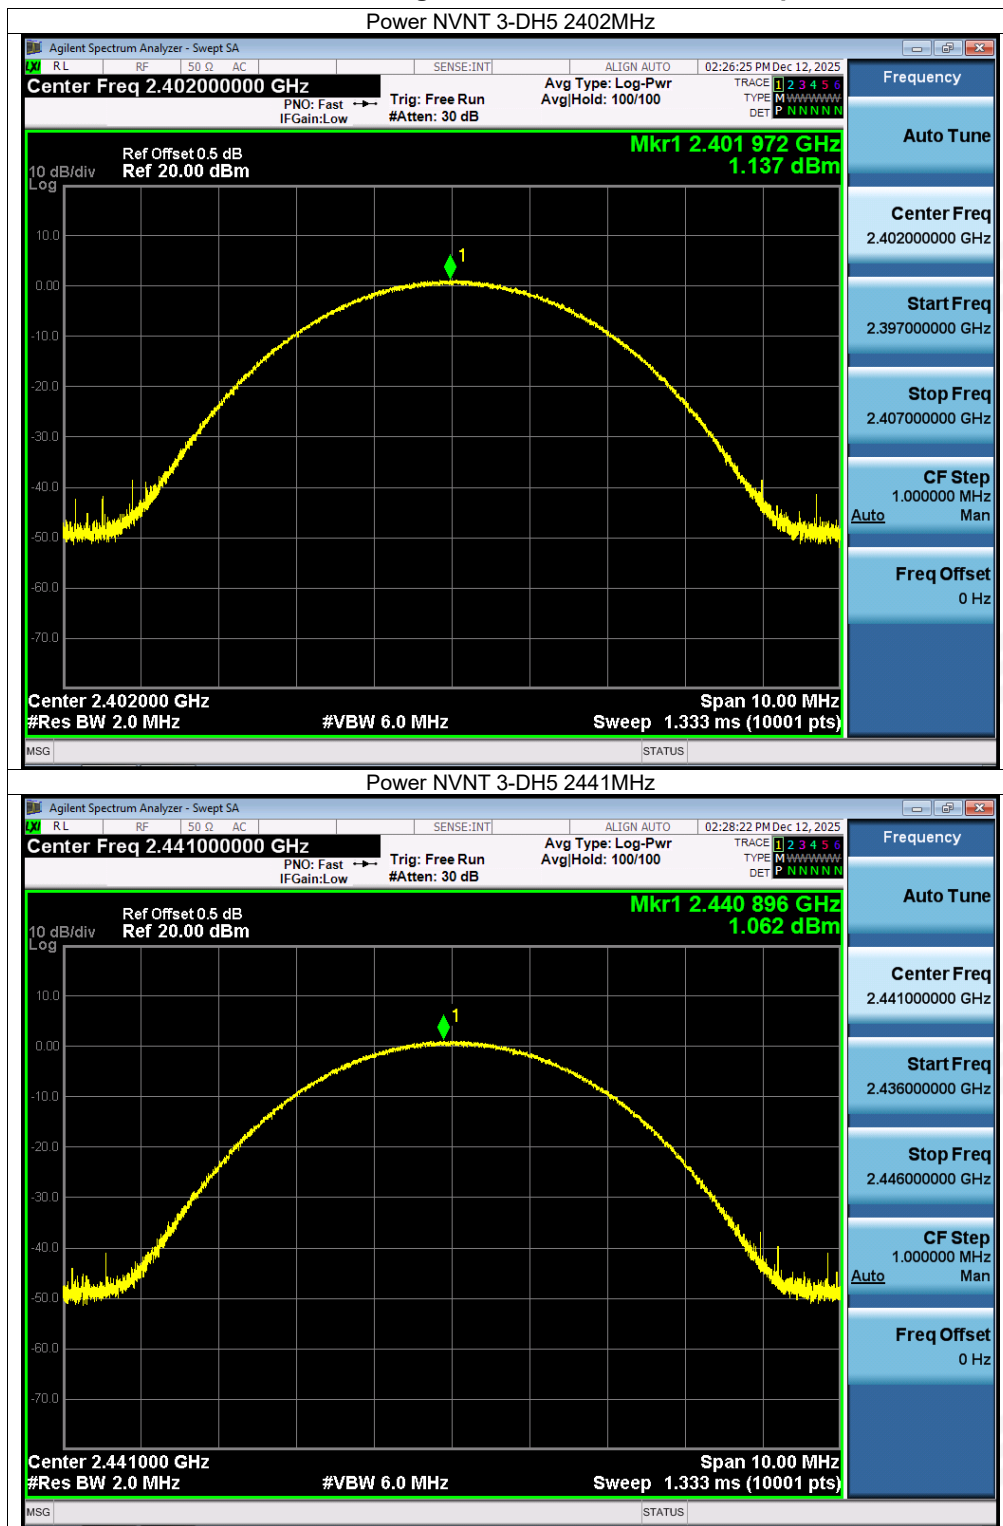

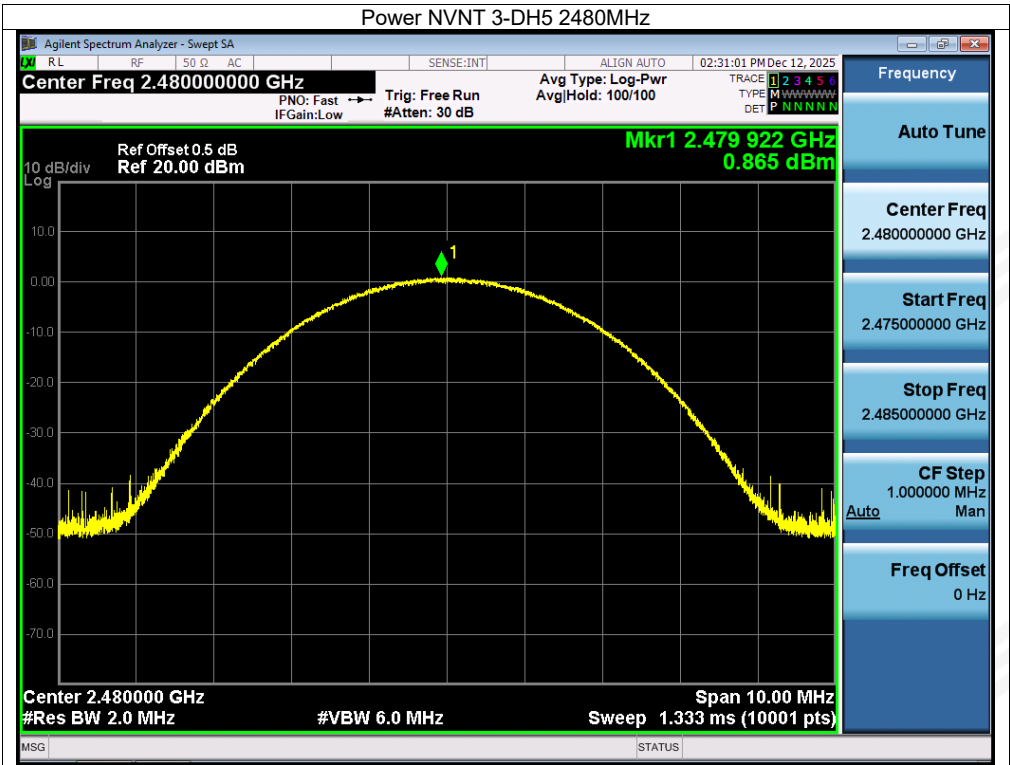

**-20dB Bandwidth**

Condition	Mode	Frequency (MHz)	-20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	1.015	Pass
NVNT	1-DH5	2441	1.021	Pass
NVNT	1-DH5	2480	0.987	Pass
NVNT	2-DH5	2402	1.28	Pass
NVNT	2-DH5	2441	1.28	Pass
NVNT	2-DH5	2480	1.276	Pass
NVNT	3-DH5	2402	1.296	Pass
NVNT	3-DH5	2441	1.302	Pass
NVNT	3-DH5	2480	1.291	Pass





Test Graphs







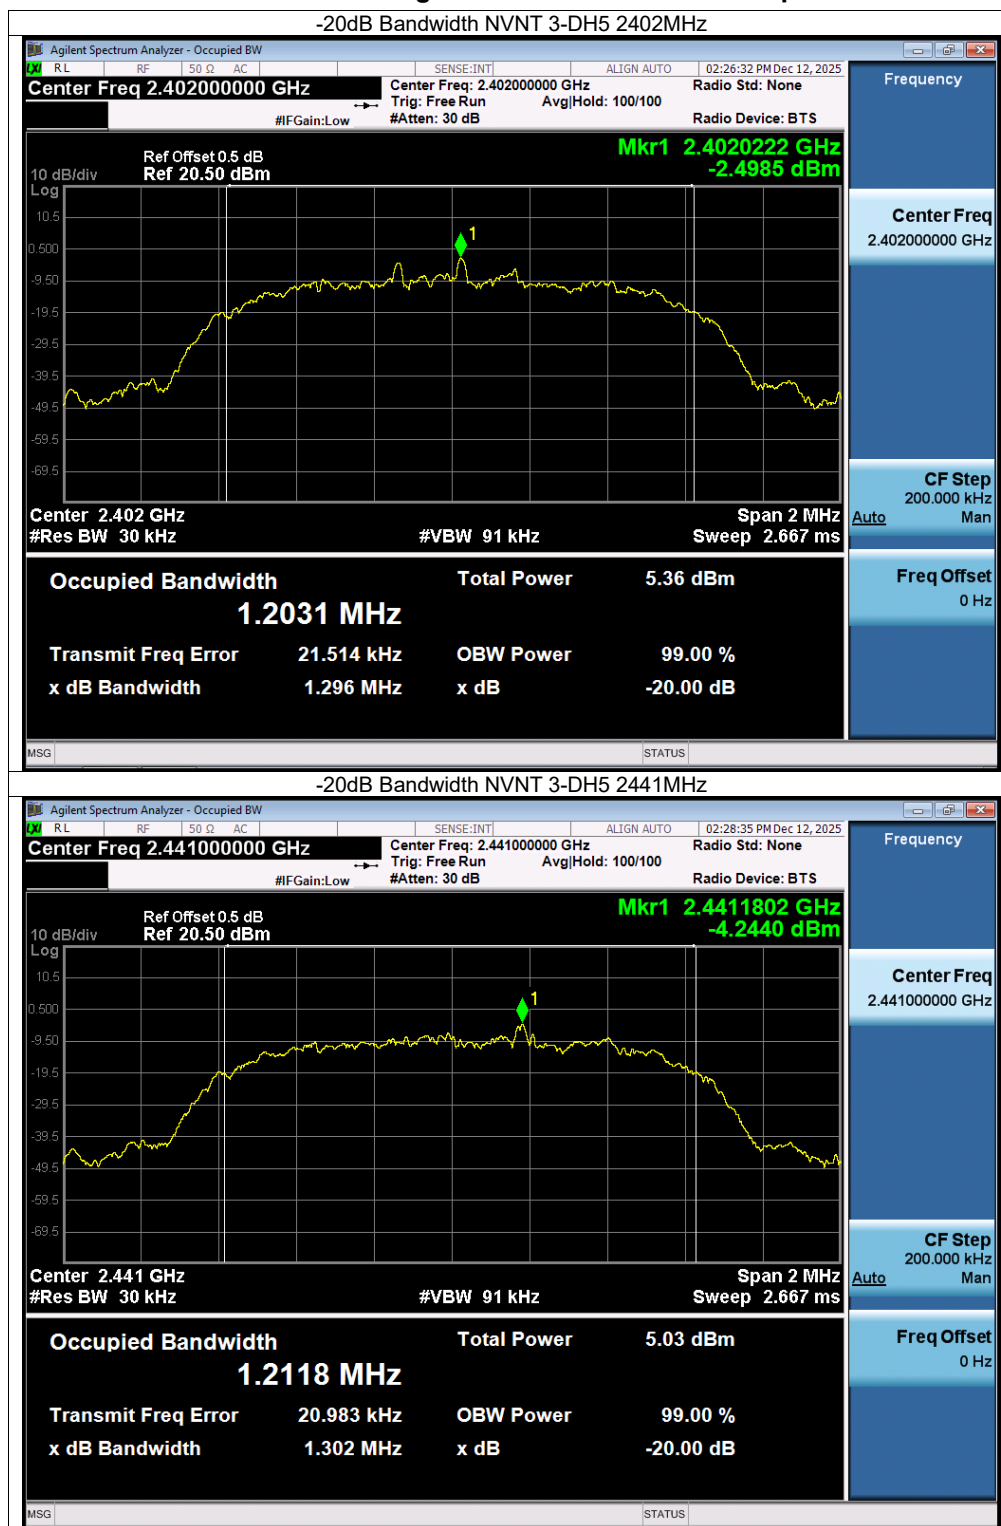

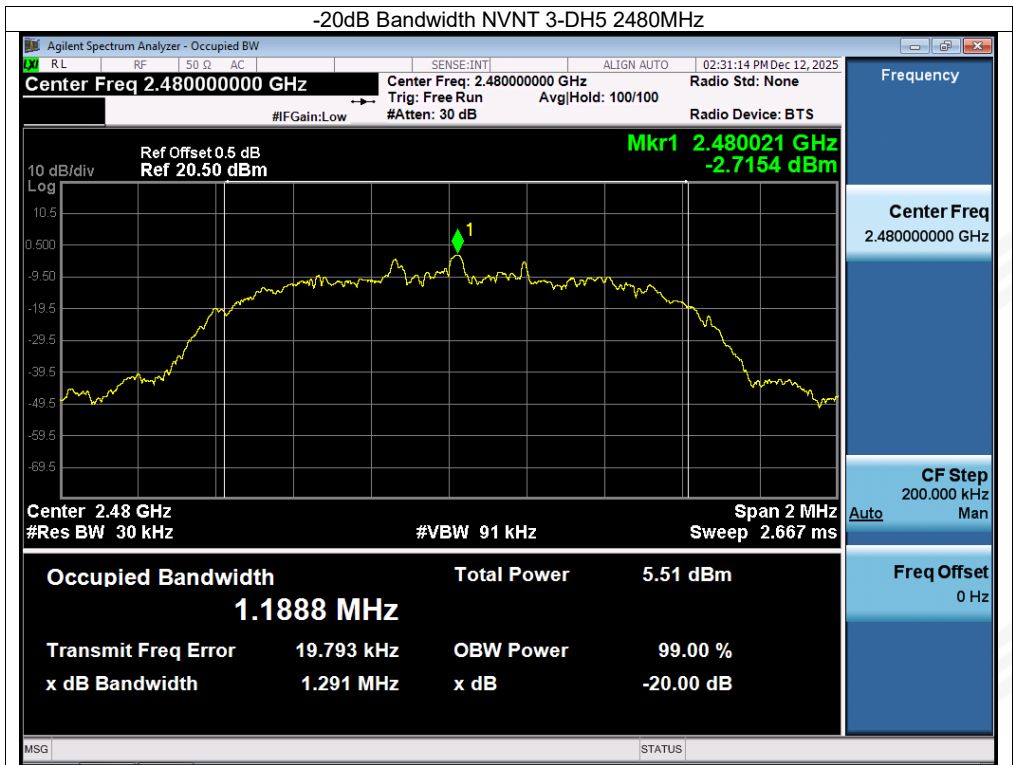





Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	1-DH5	2402	0.878
NVNT	1-DH5	2441	0.883
NVNT	1-DH5	2480	0.872
NVNT	2-DH5	2402	1.196
NVNT	2-DH5	2441	1.185
NVNT	2-DH5	2480	1.184
NVNT	3-DH5	2402	1.192
NVNT	3-DH5	2441	1.192
NVNT	3-DH5	2480	1.201




Test Graphs

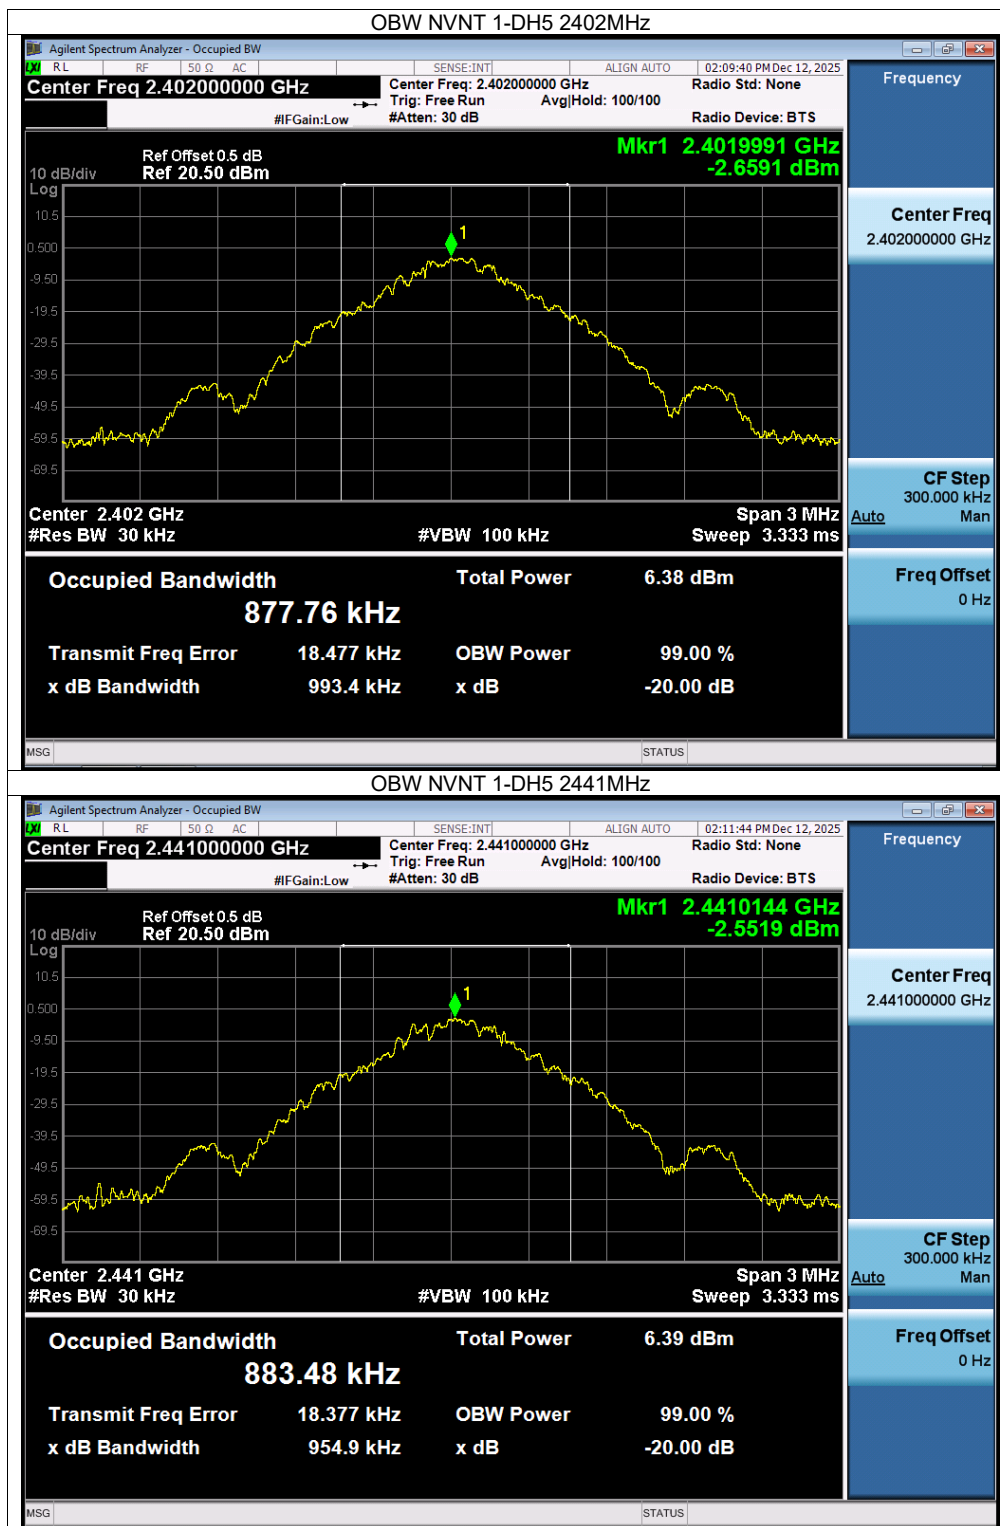

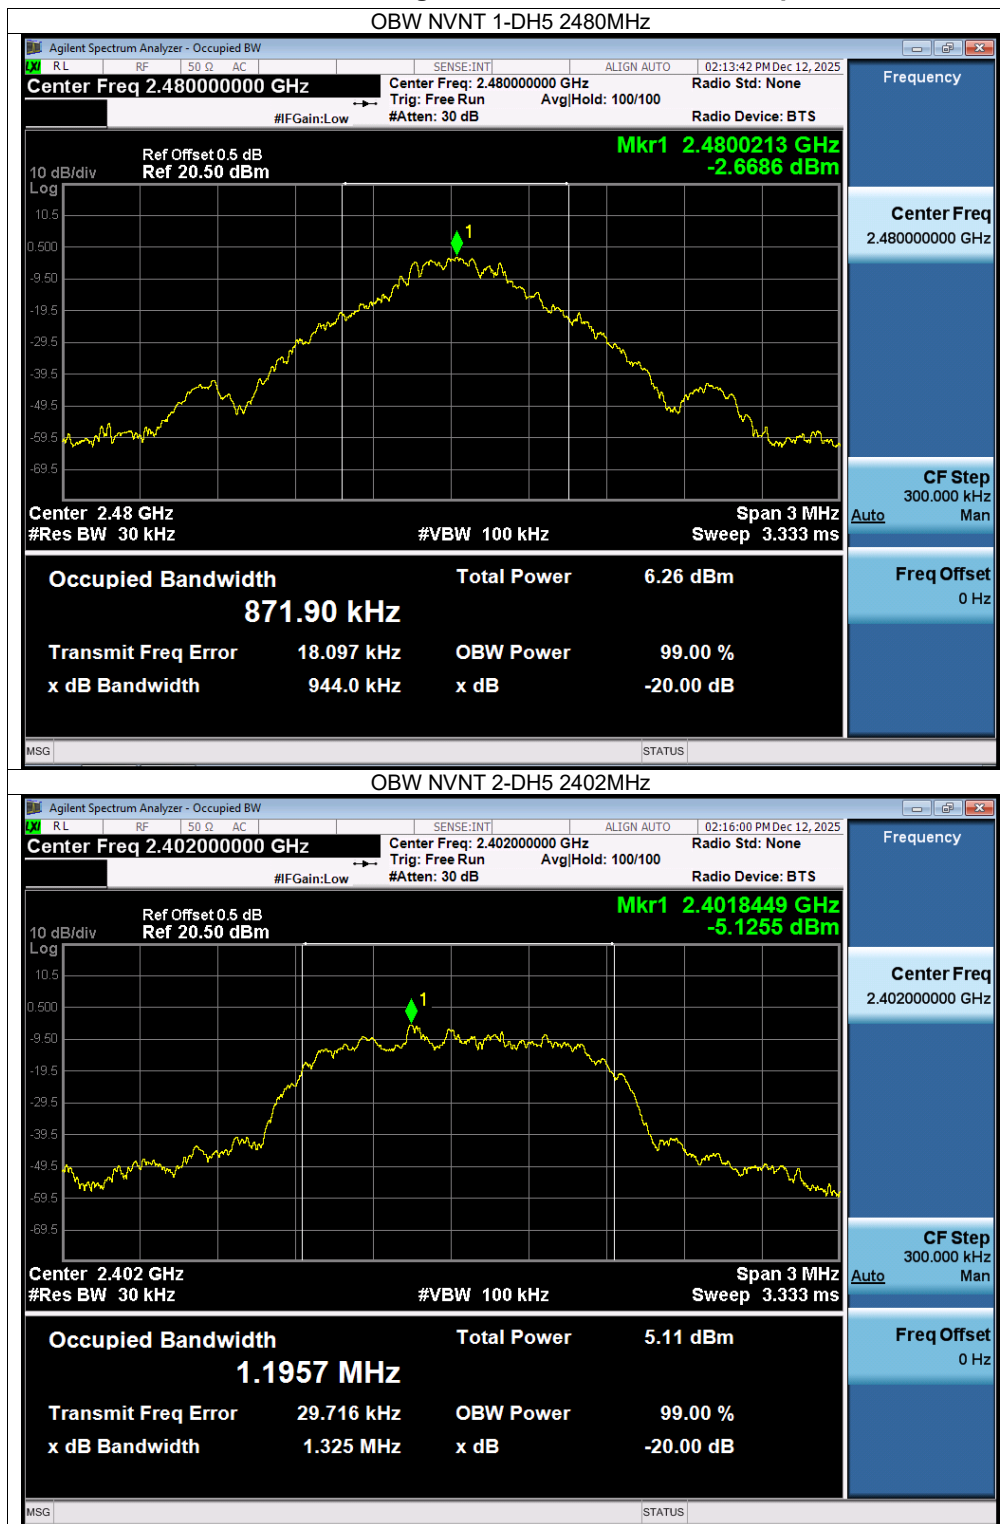





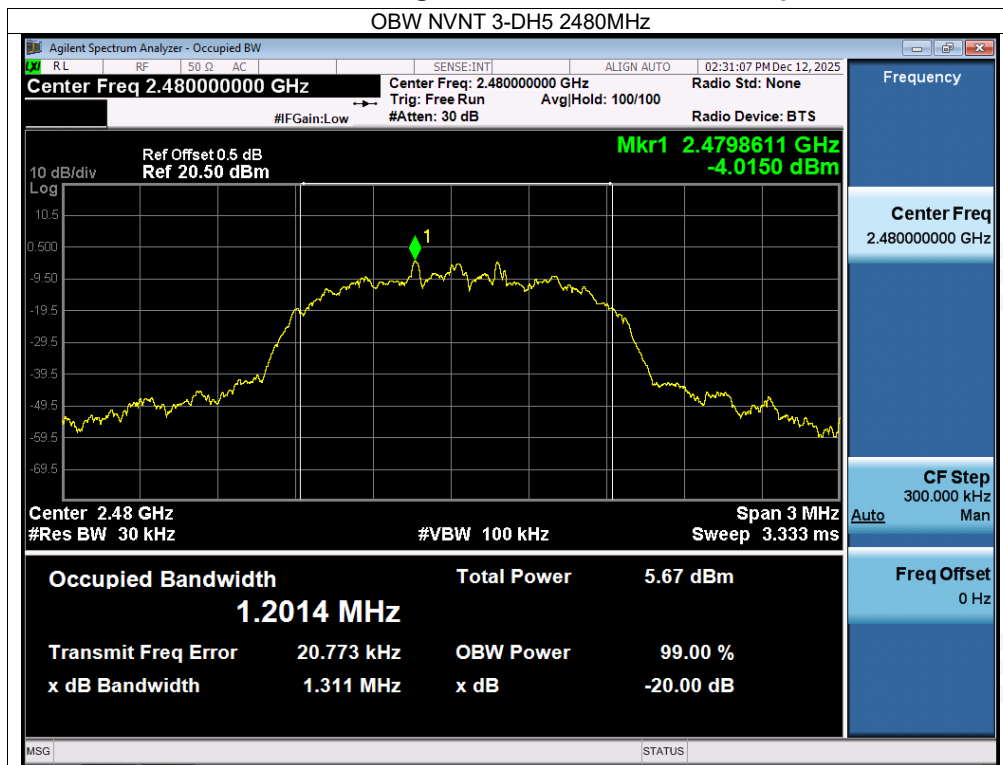





Carrier Frequencies Separation


Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	2402.014	2403.016	1.002	≥ 0.677	Pass
NVNT	1-DH5	2441.02	2442.02	1	≥ 0.681	Pass
NVNT	1-DH5	2479.02	2480.02	1	≥ 0.658	Pass
NVNT	2-DH5	2402.016	2403.014	0.998	≥ 0.853	Pass
NVNT	2-DH5	2441.014	2442.018	1.004	≥ 0.853	Pass
NVNT	2-DH5	2479.02	2480.022	1.002	≥ 0.851	Pass
NVNT	3-DH5	2402.016	2403.014	0.998	≥ 0.864	Pass
NVNT	3-DH5	2441.018	2442.018	1	≥ 0.868	Pass
NVNT	3-DH5	2479.024	2480.022	0.998	≥ 0.861	Pass




Test Graphs

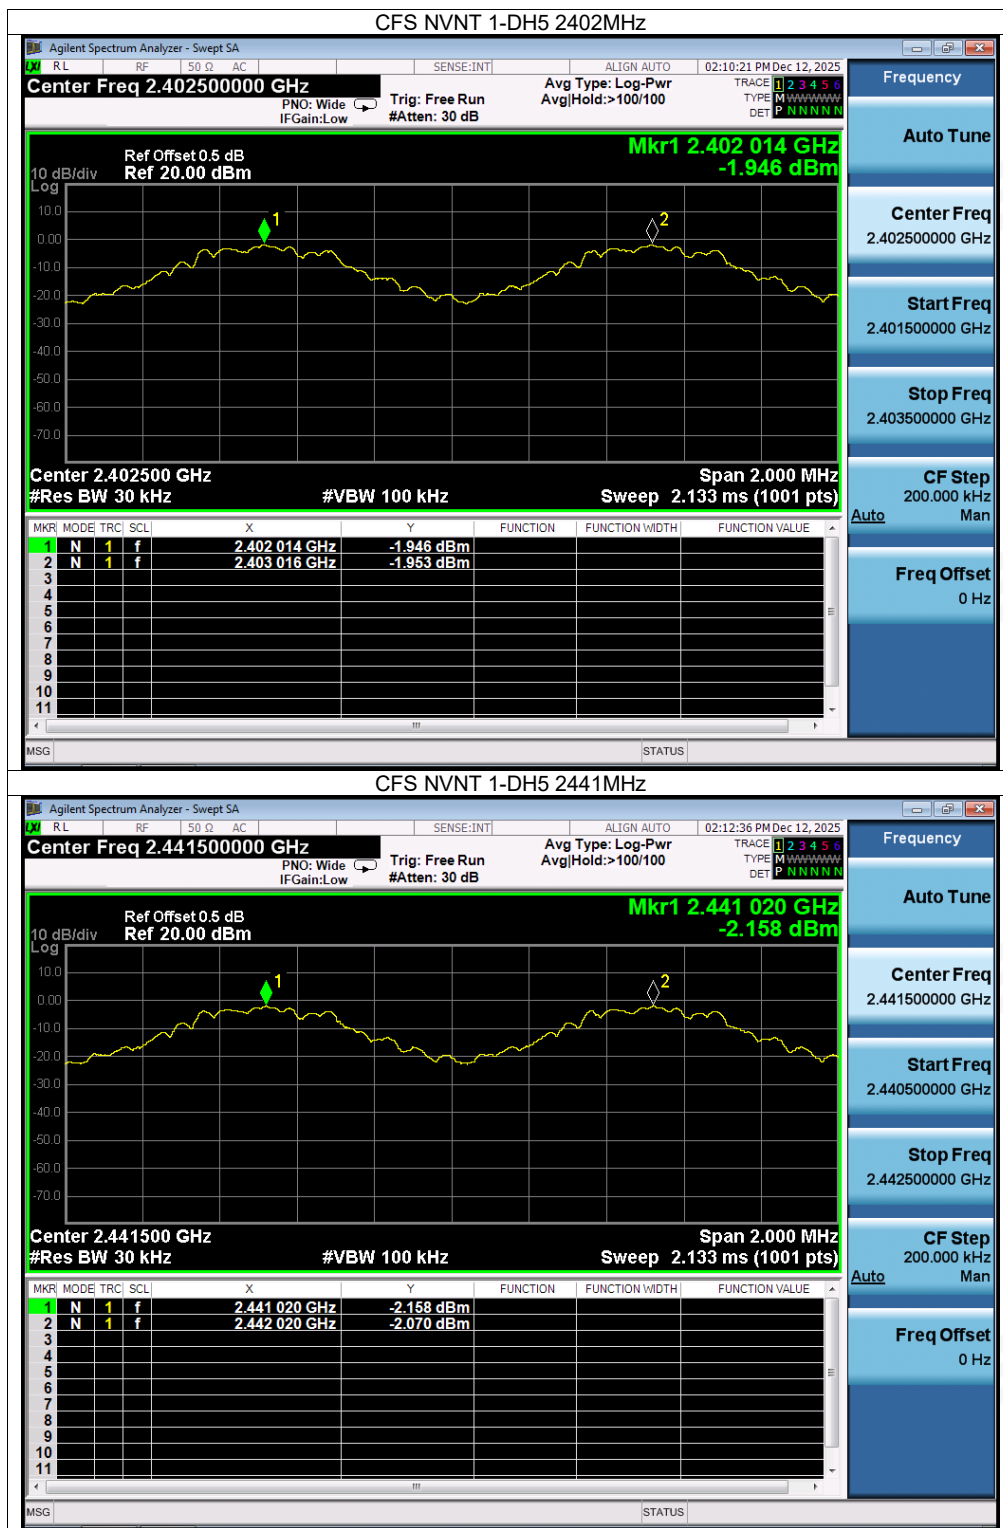

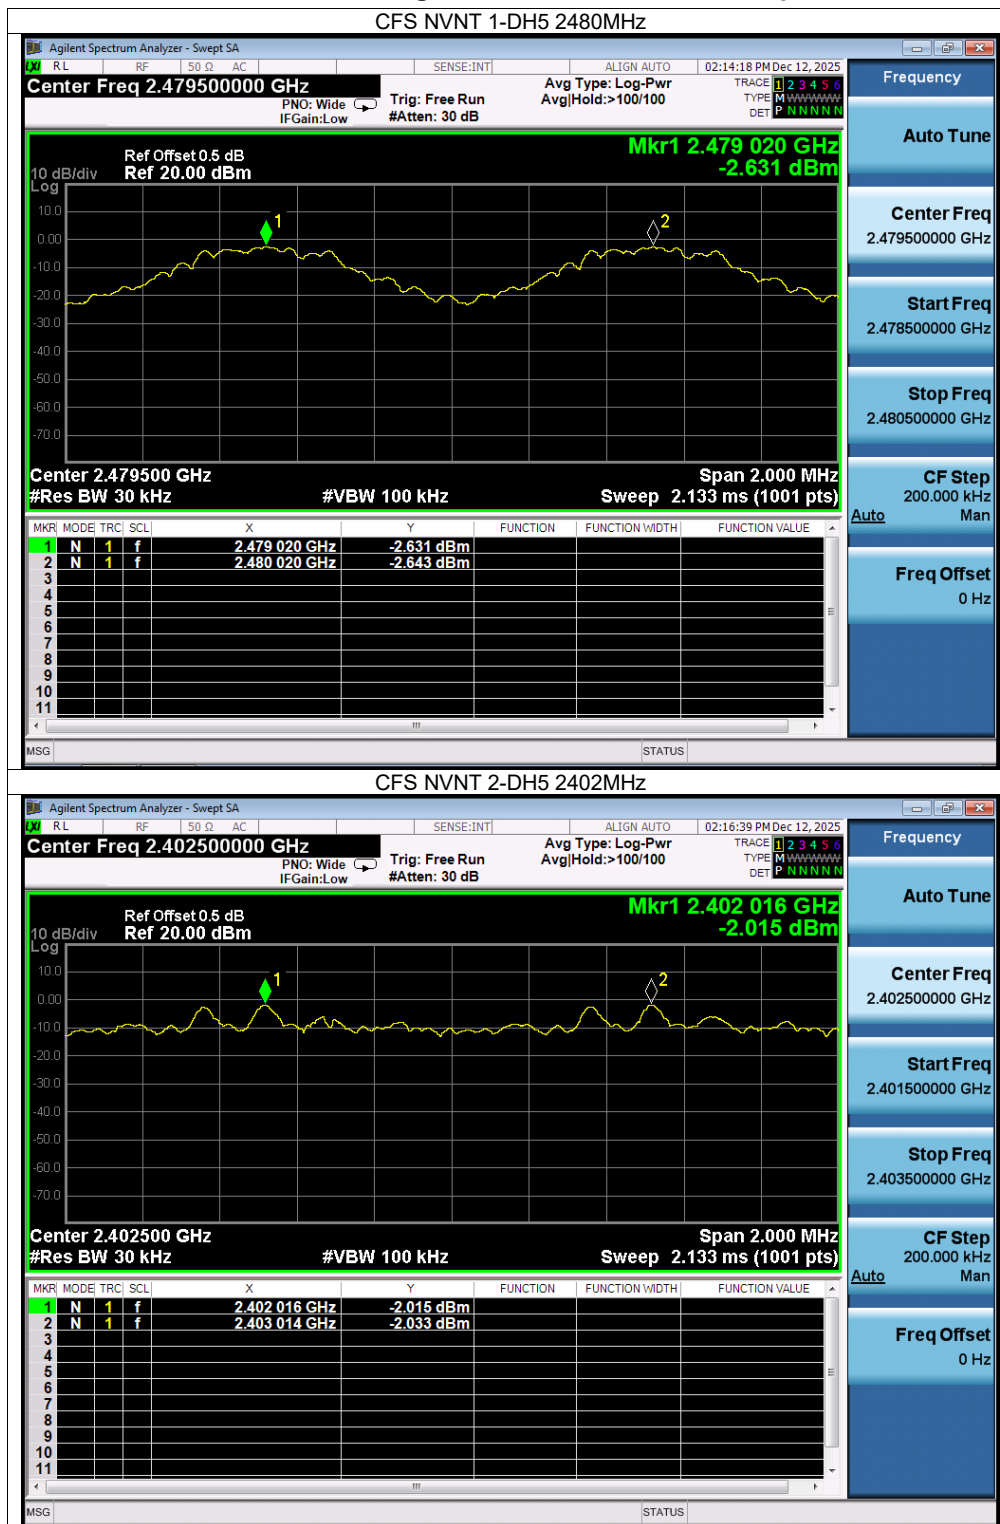

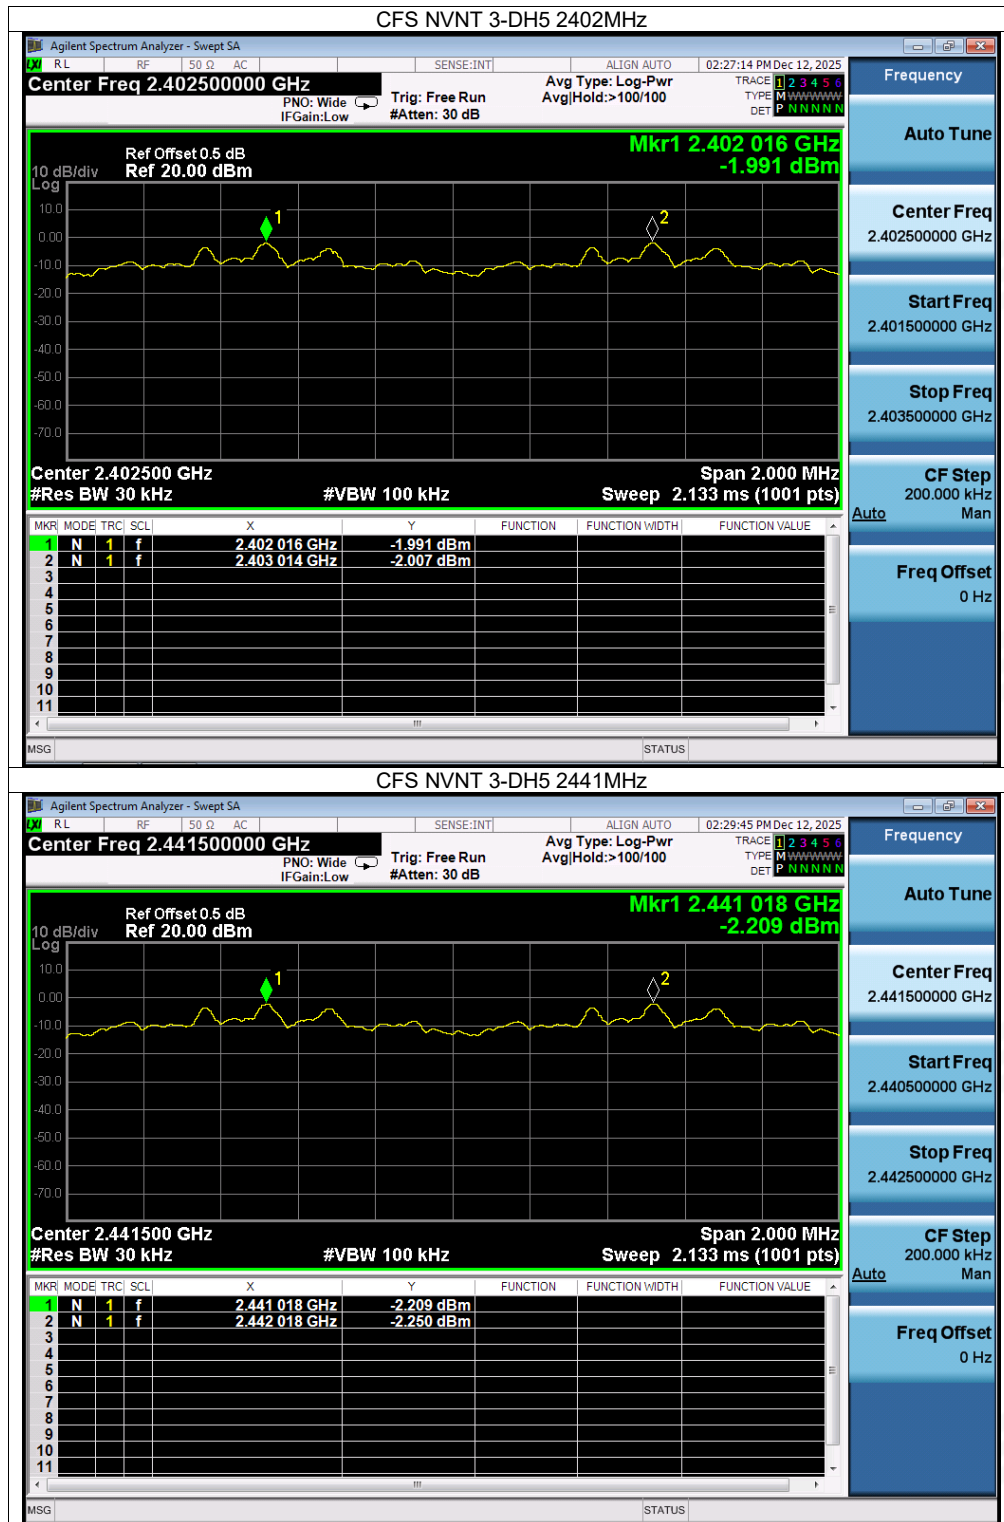


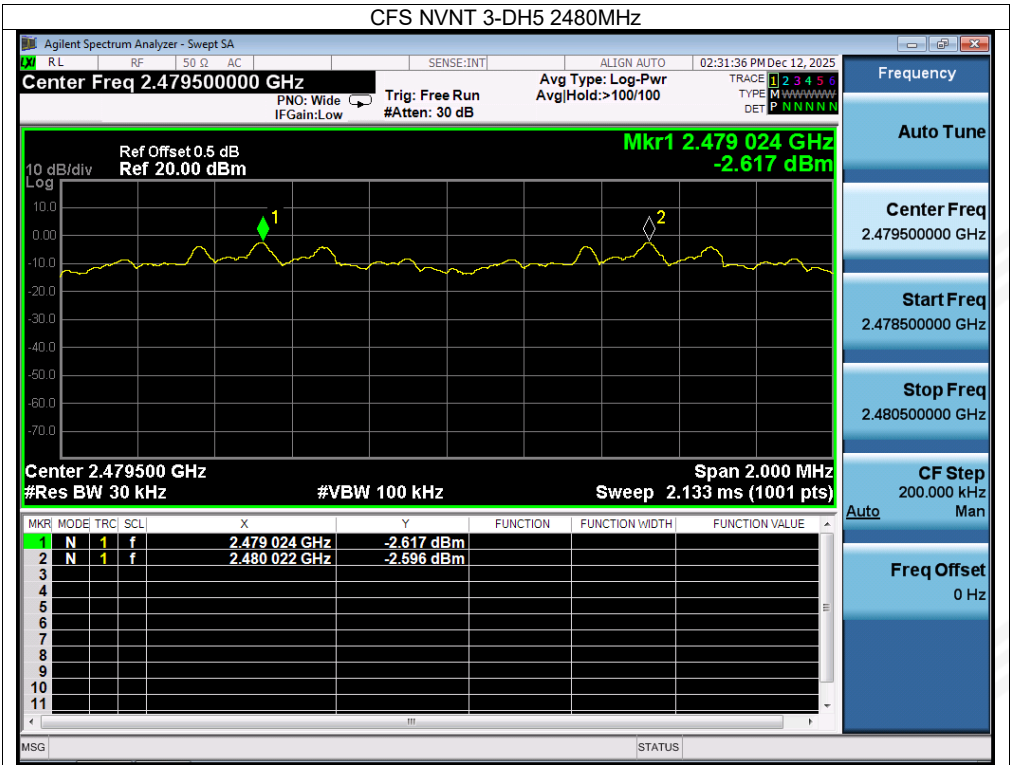




Number of Hopping Channel

Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH5	79	≥ 15	Pass
NVNT	2-DH5	79	≥ 15	Pass
NVNT	3-DH5	79	≥ 15	Pass

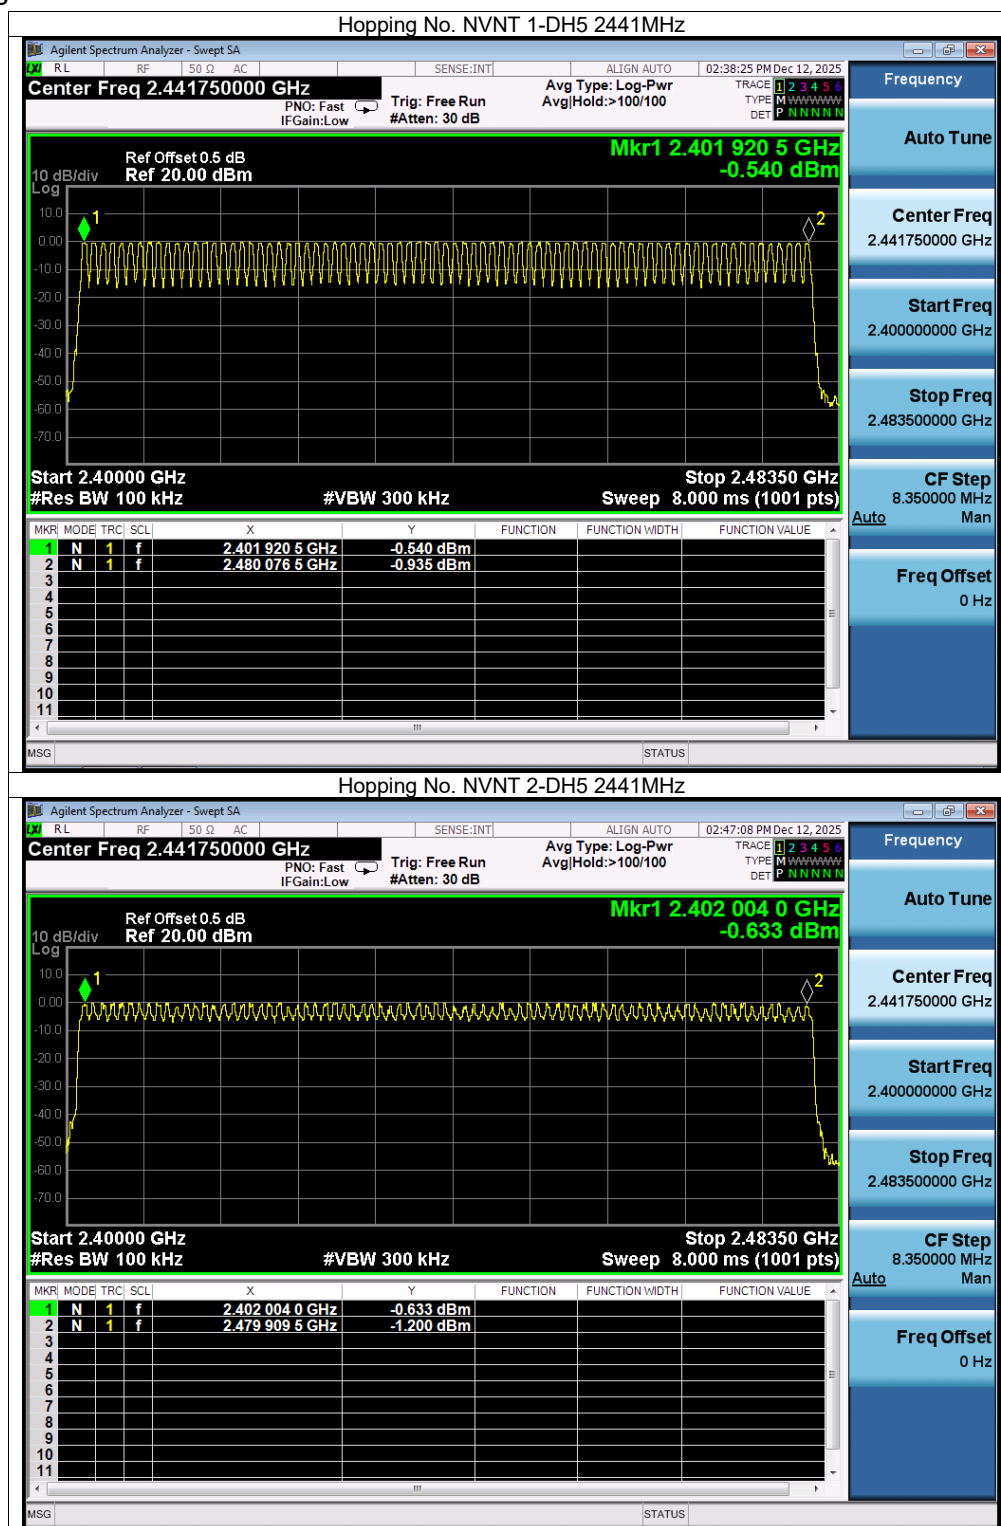


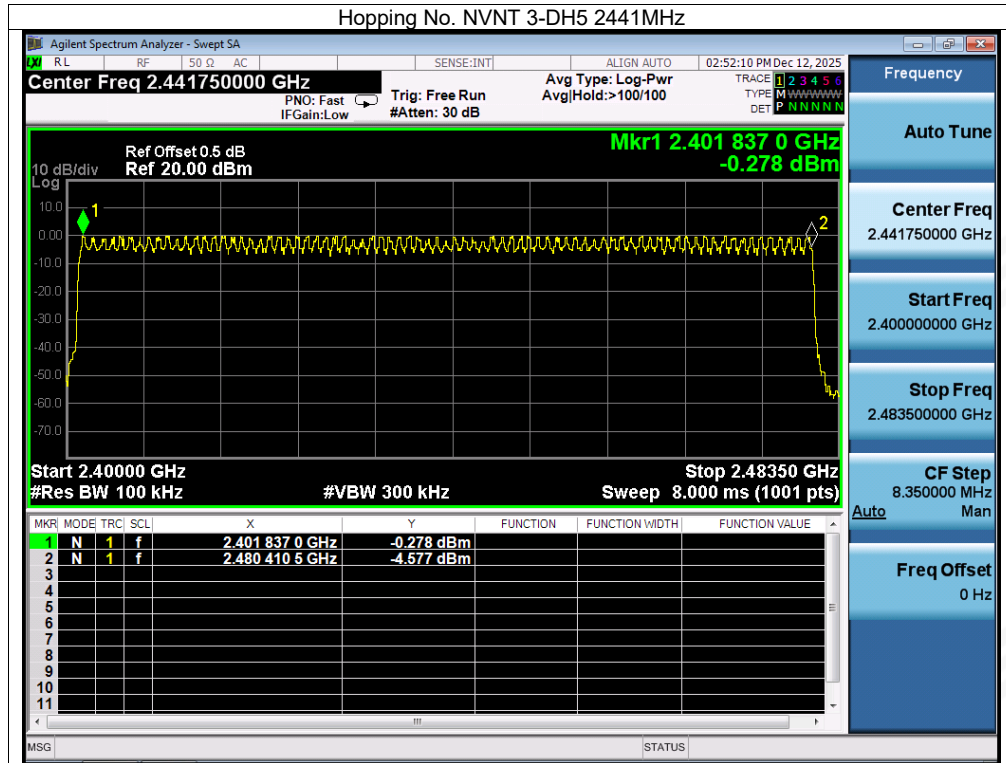






Band Edge


Condition	Mode	Frequency (MHz)	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	No-Hopping	-55.32	≤ -20	Pass
NVNT	1-DH5	2480	No-Hopping	-57.52	≤ -20	Pass
NVNT	2-DH5	2402	No-Hopping	-52.94	≤ -20	Pass
NVNT	2-DH5	2480	No-Hopping	-56.22	≤ -20	Pass
NVNT	3-DH5	2402	No-Hopping	-51.93	≤ -20	Pass
NVNT	3-DH5	2480	No-Hopping	-55.78	≤ -20	Pass

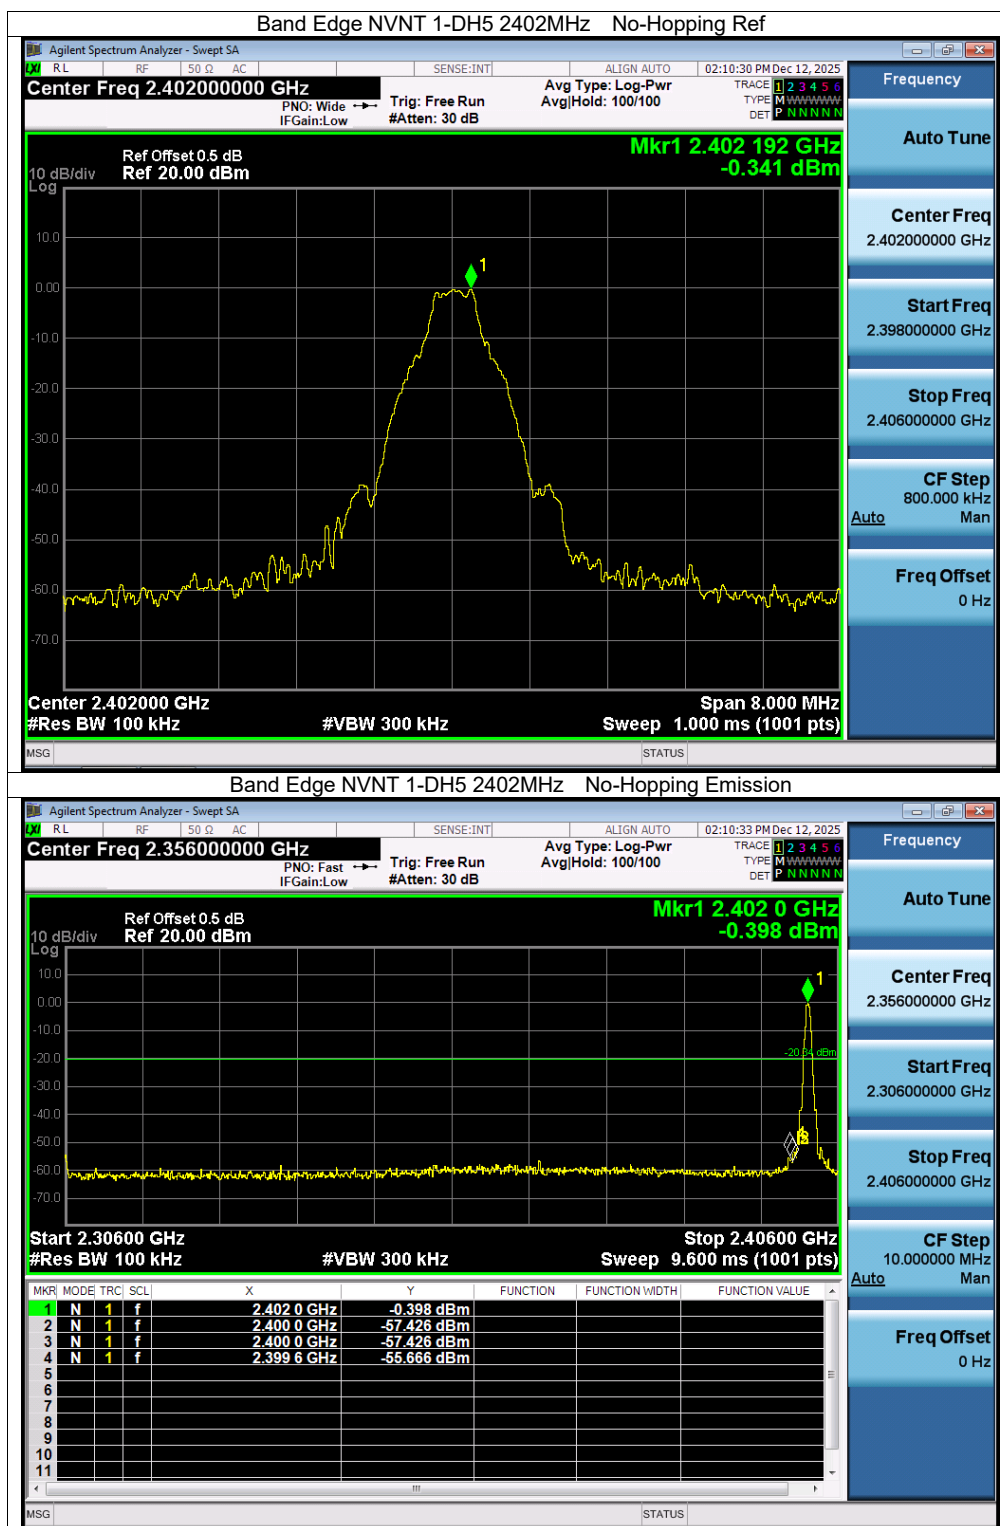


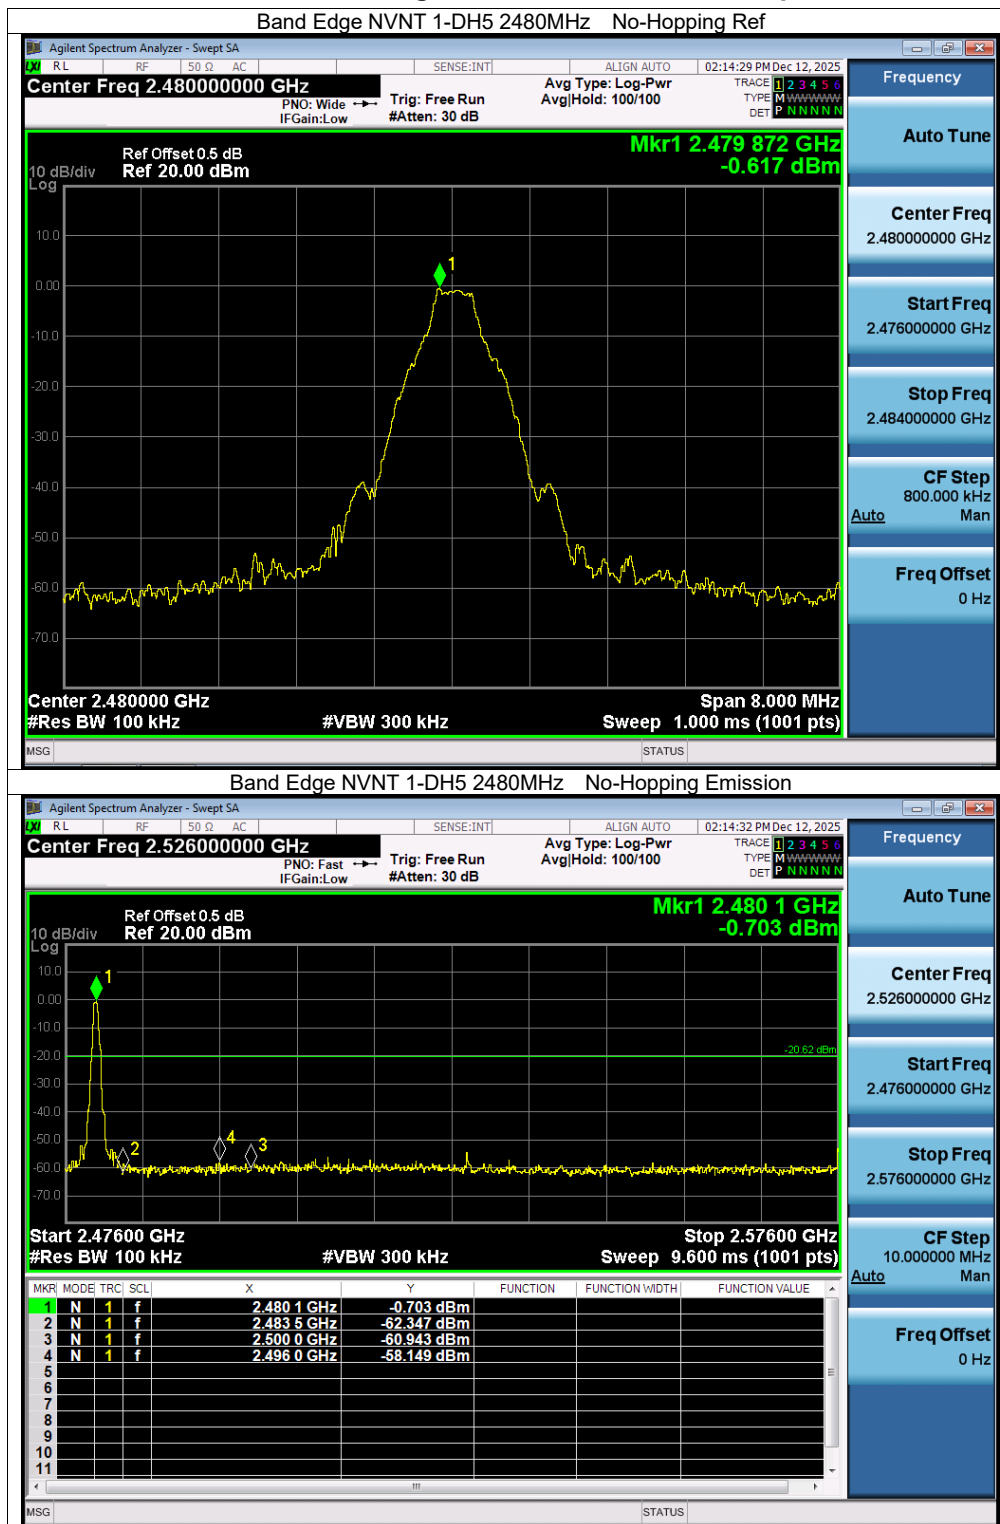

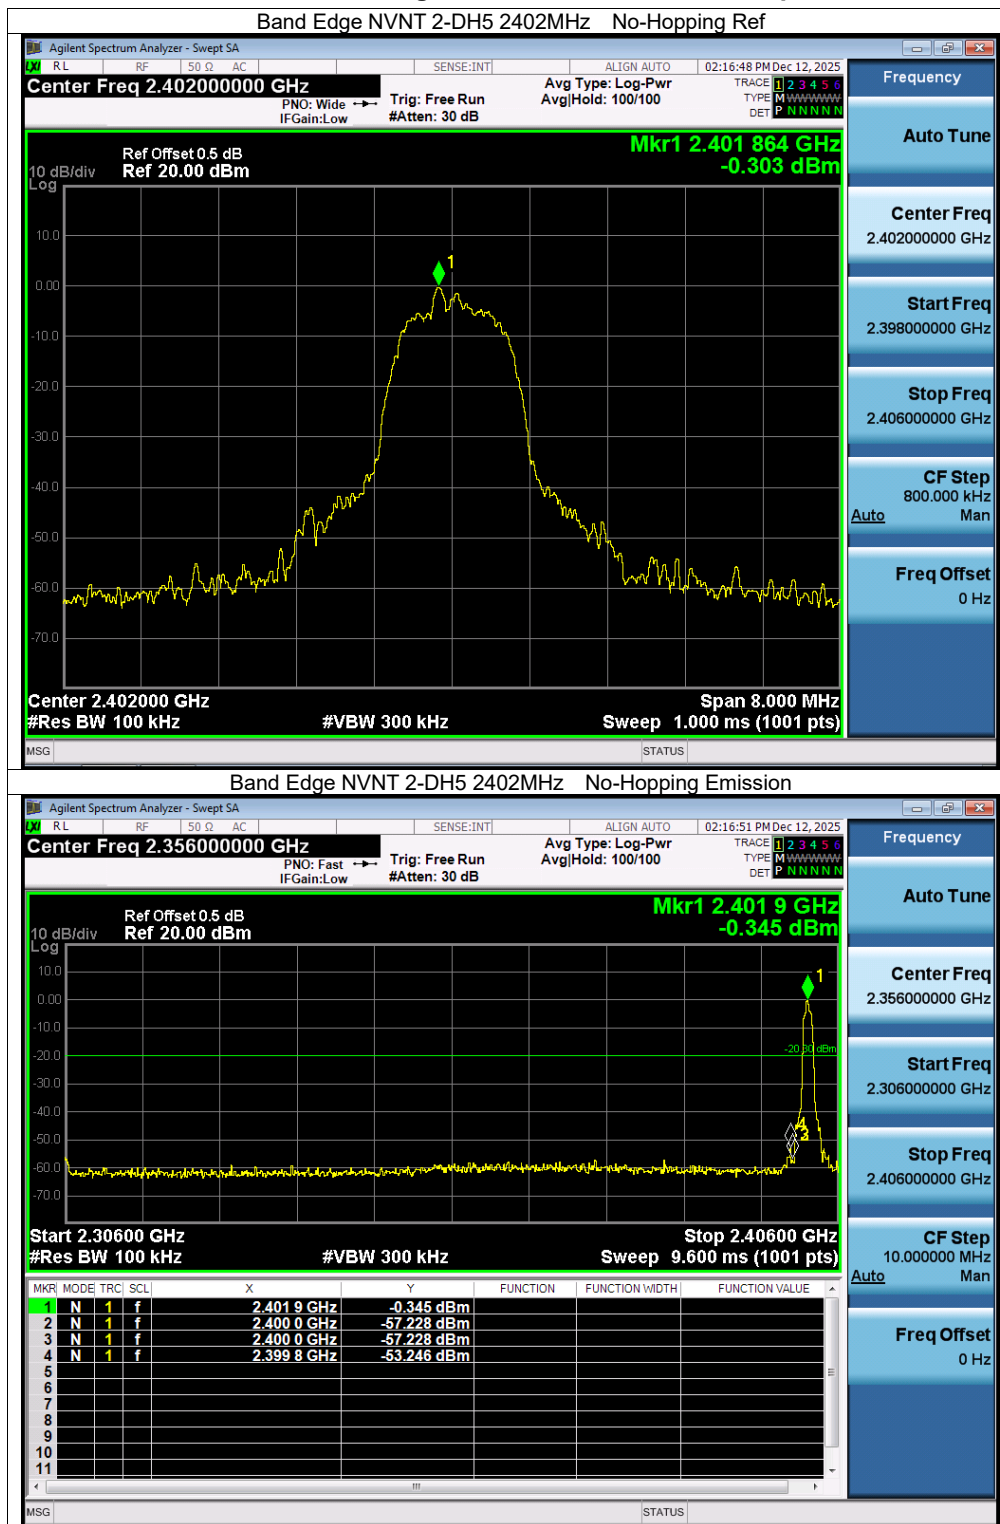

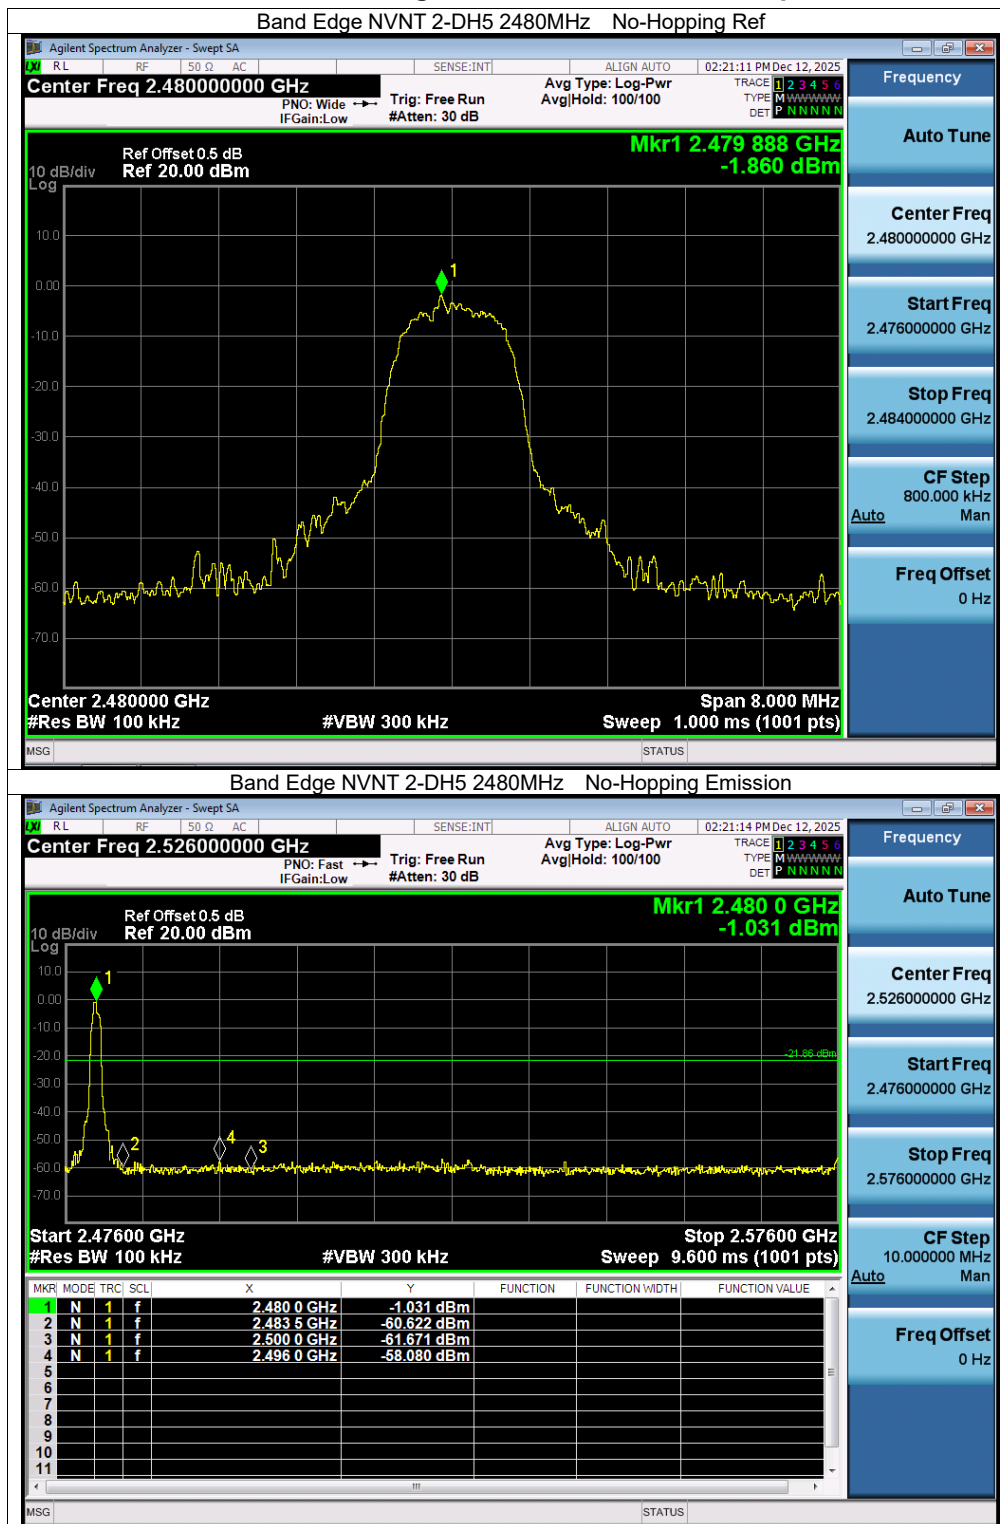

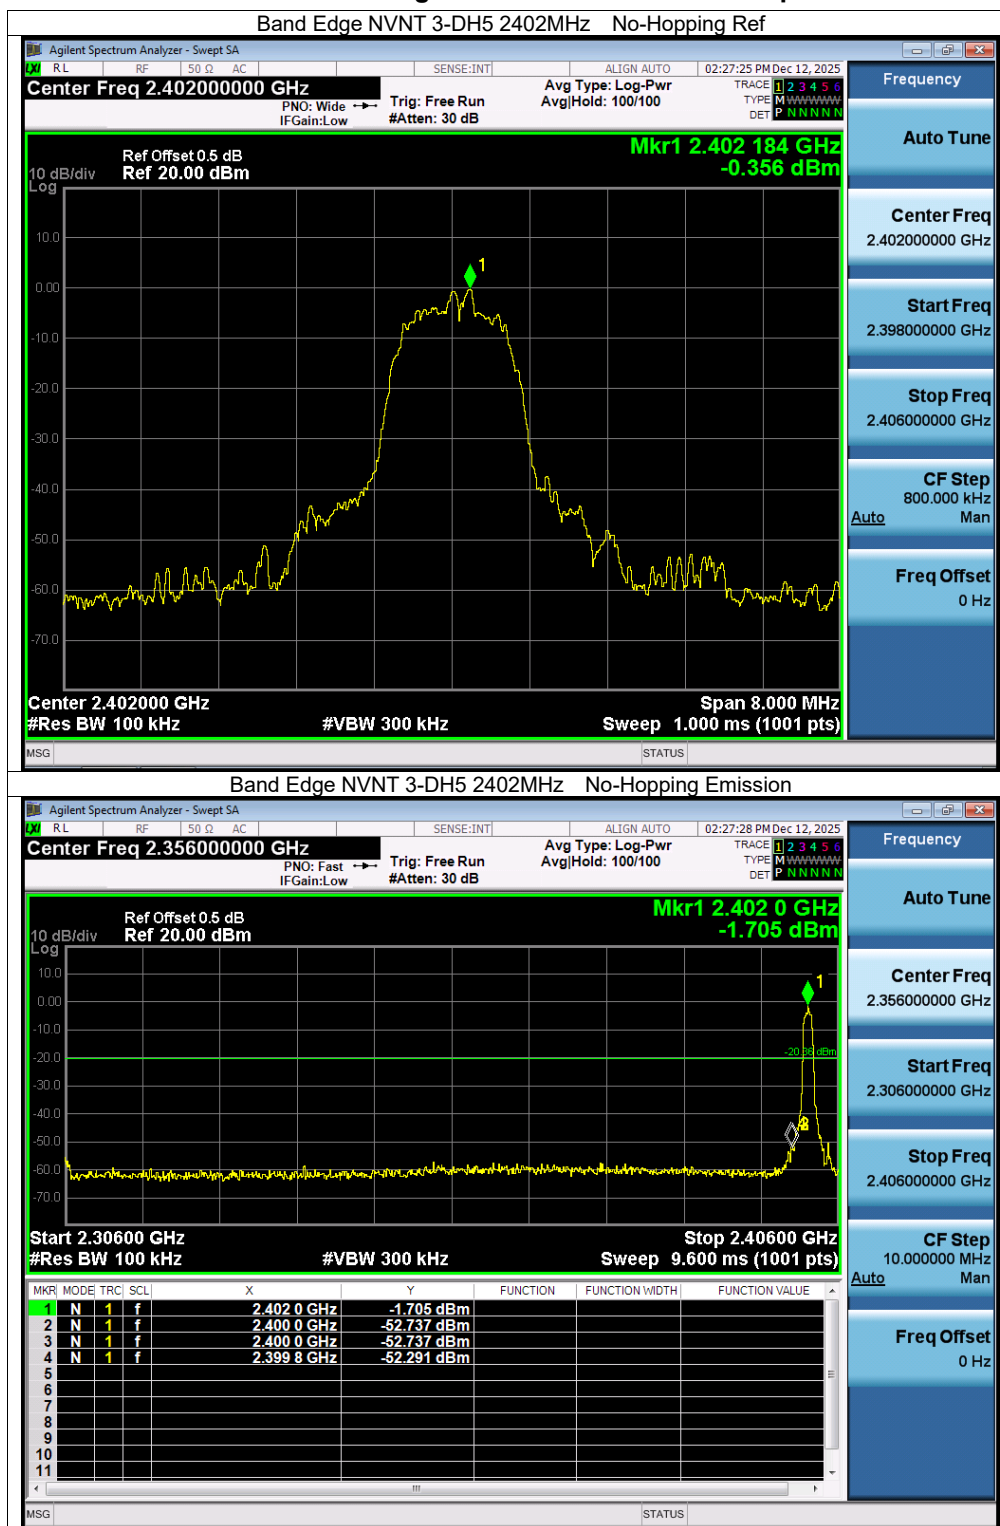

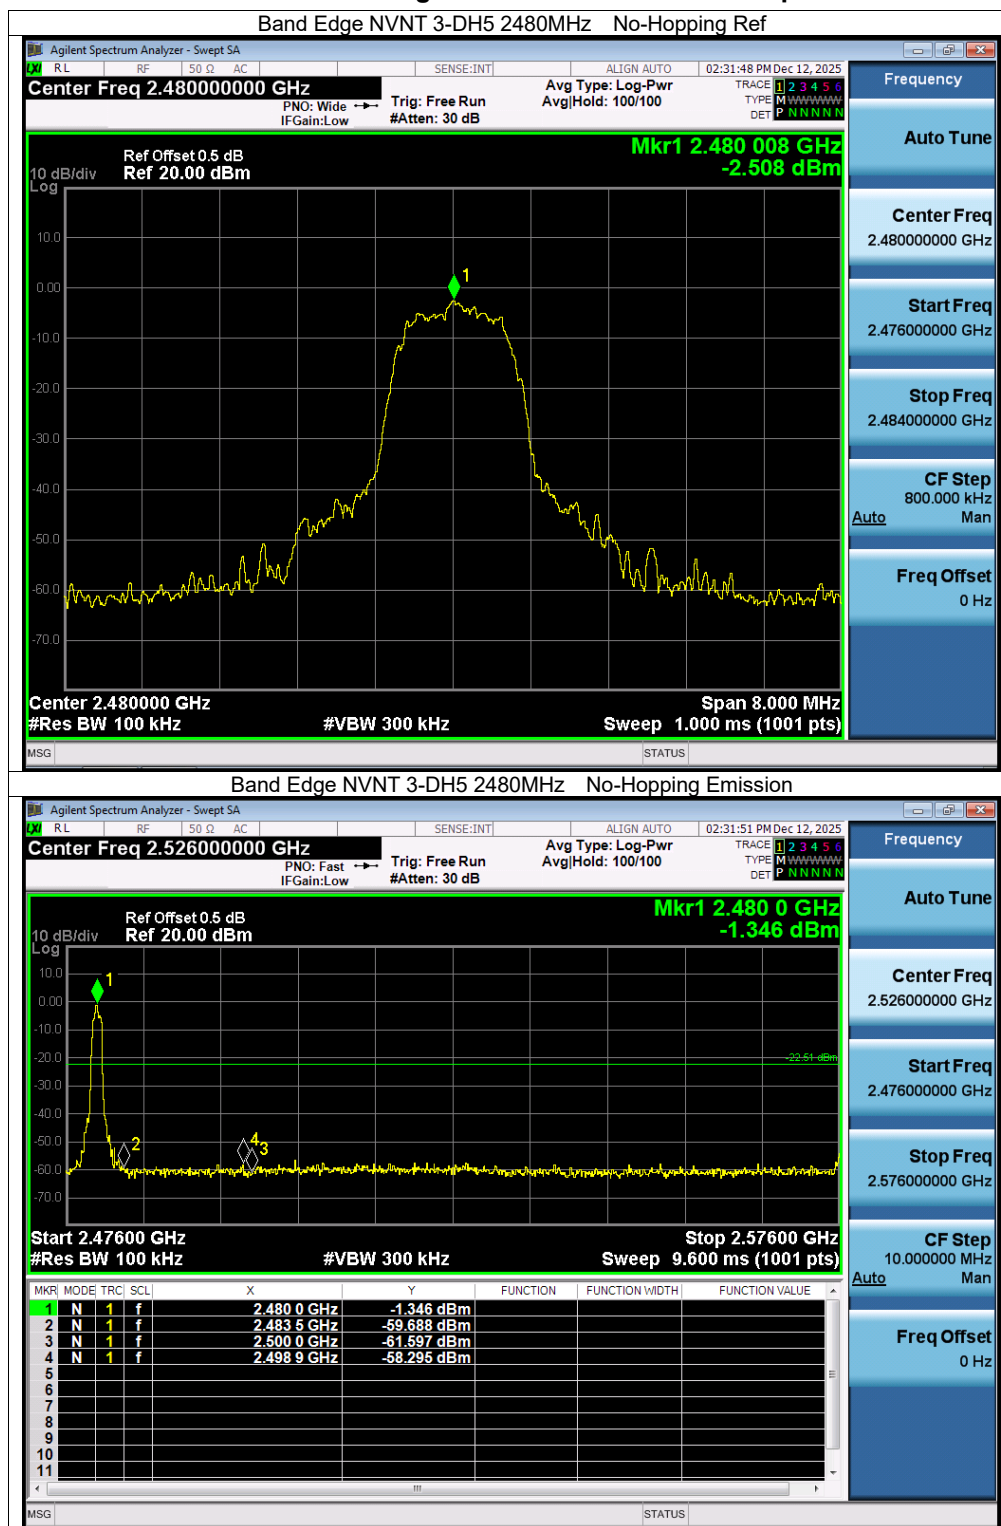




Band Edge(Hopping)


Condition	Mode	Frequency (MHz)	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Hopping	-52.26	<=-20	Pass
NVNT	1-DH5	2480	Hopping	-51.74	<=-20	Pass
NVNT	2-DH5	2402	Hopping	-53.31	<=-20	Pass
NVNT	2-DH5	2480	Hopping	-52.68	<=-20	Pass
NVNT	3-DH5	2402	Hopping	-53.29	<=-20	Pass
NVNT	3-DH5	2480	Hopping	-52.55	<=-20	Pass



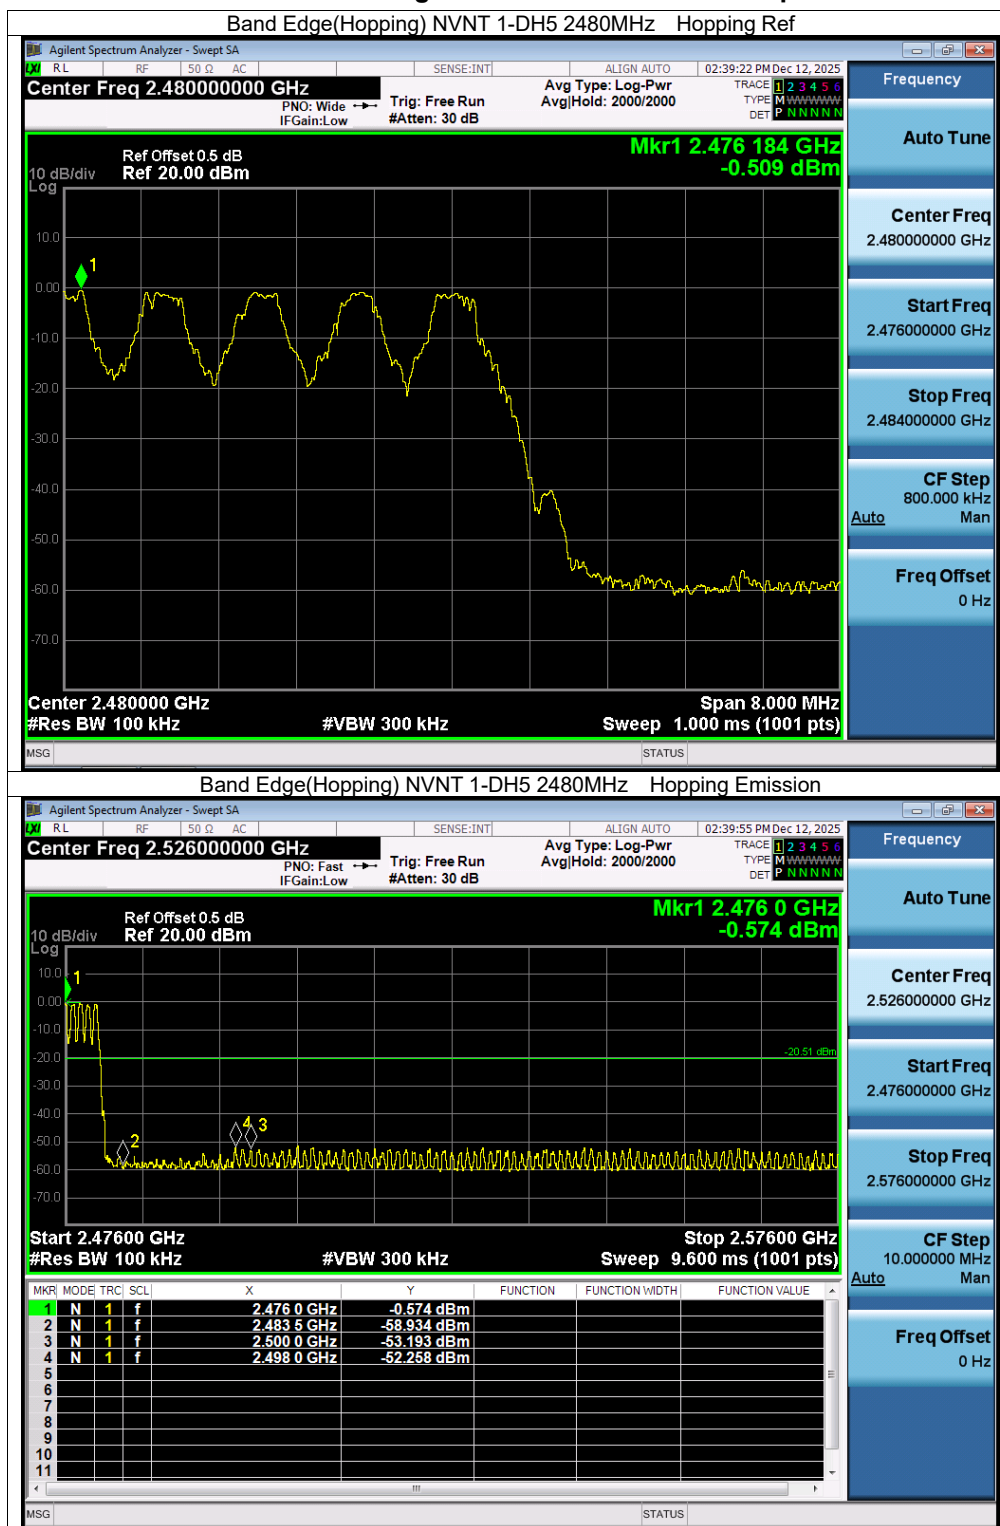





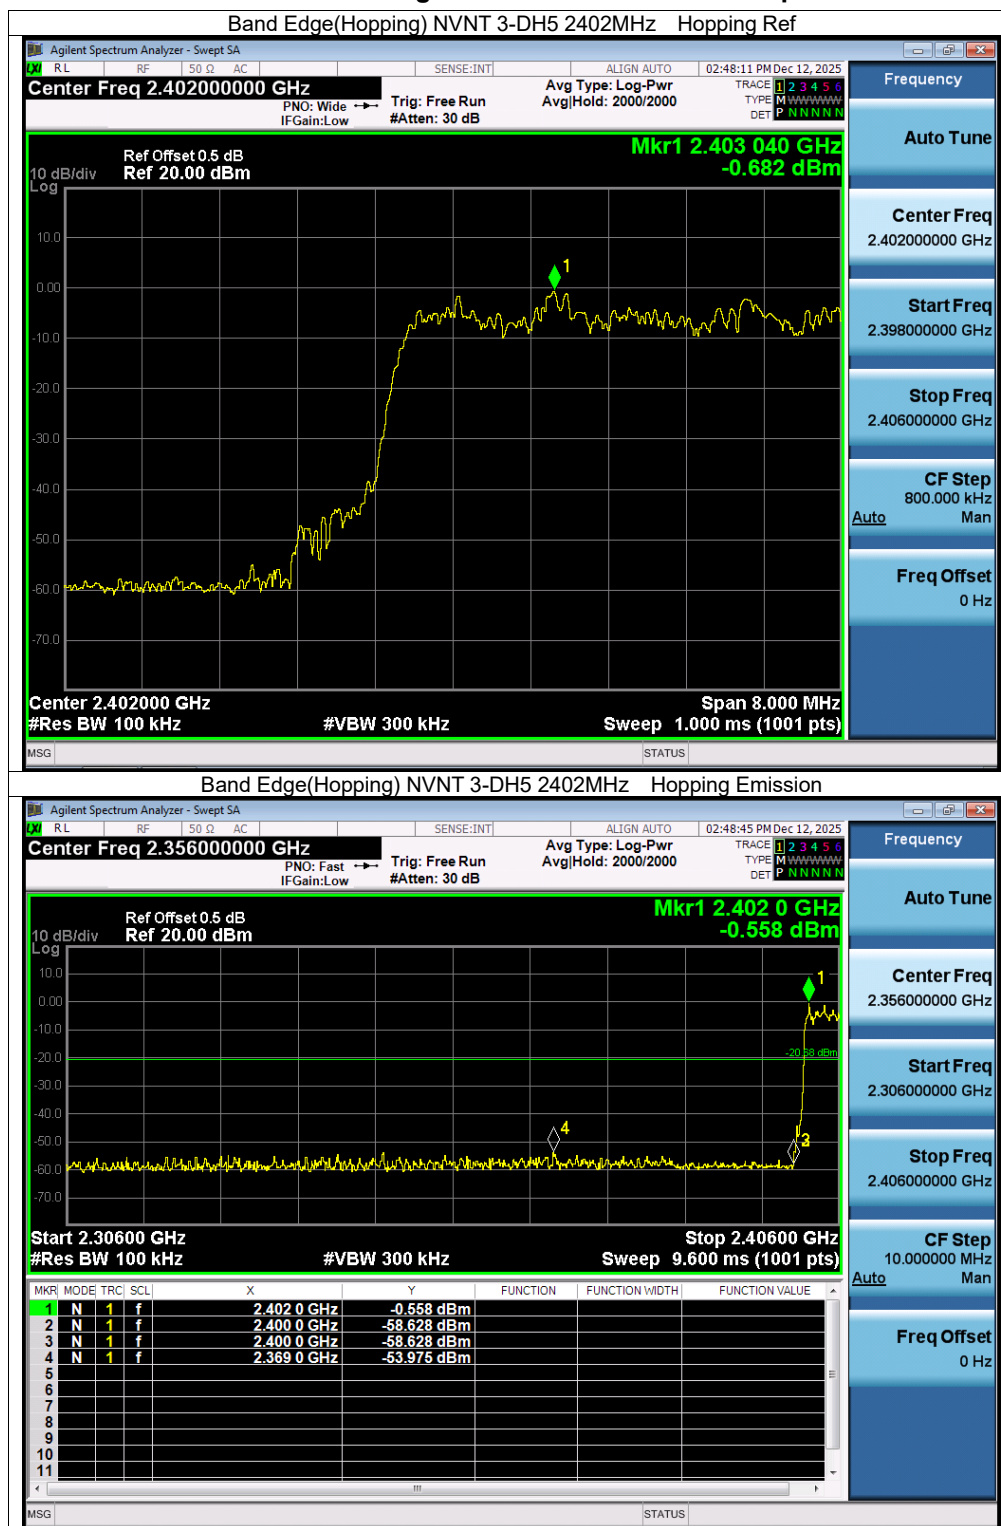







Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	-40.48	<=-20	Pass
NVNT	1-DH5	2480	-42.52	<=-20	Pass
NVNT	1-DH5	2480	-42.38	<=-20	Pass
NVNT	2-DH5	2402	-40.03	<=-20	Pass
NVNT	2-DH5	2441	-42.12	<=-20	Pass
NVNT	2-DH5	2480	-41.45	<=-20	Pass
NVNT	3-DH5	2402	-39.95	<=-20	Pass
NVNT	3-DH5	2441	-41.16	<=-20	Pass
NVNT	3-DH5	2480	-42.32	<=-20	Pass





Test Graphs

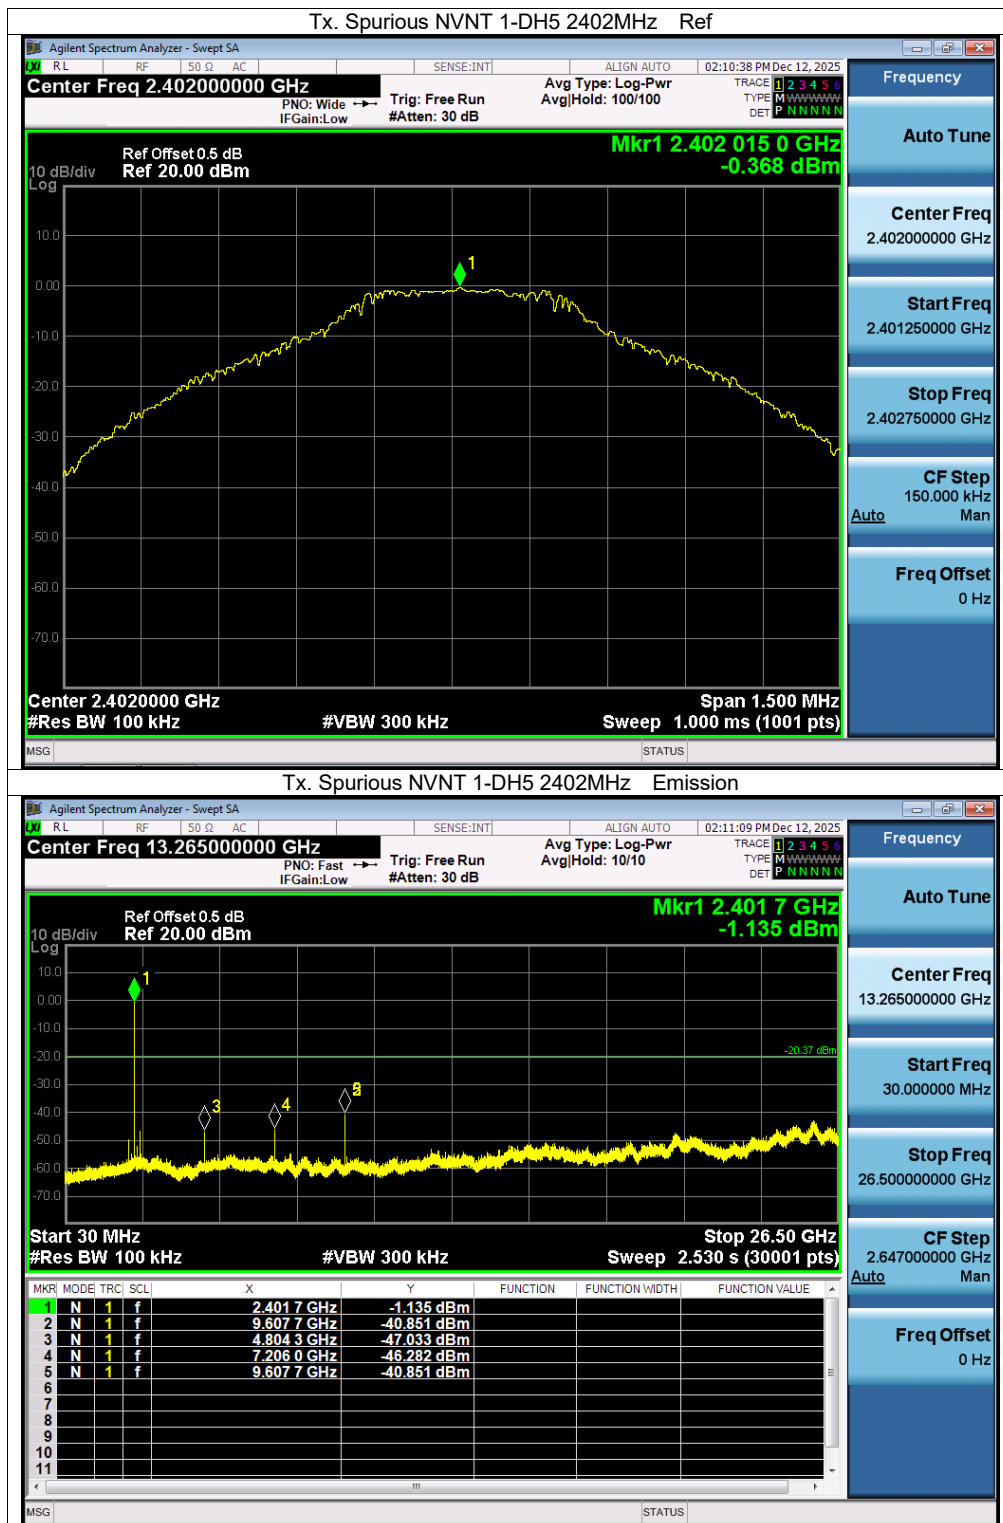


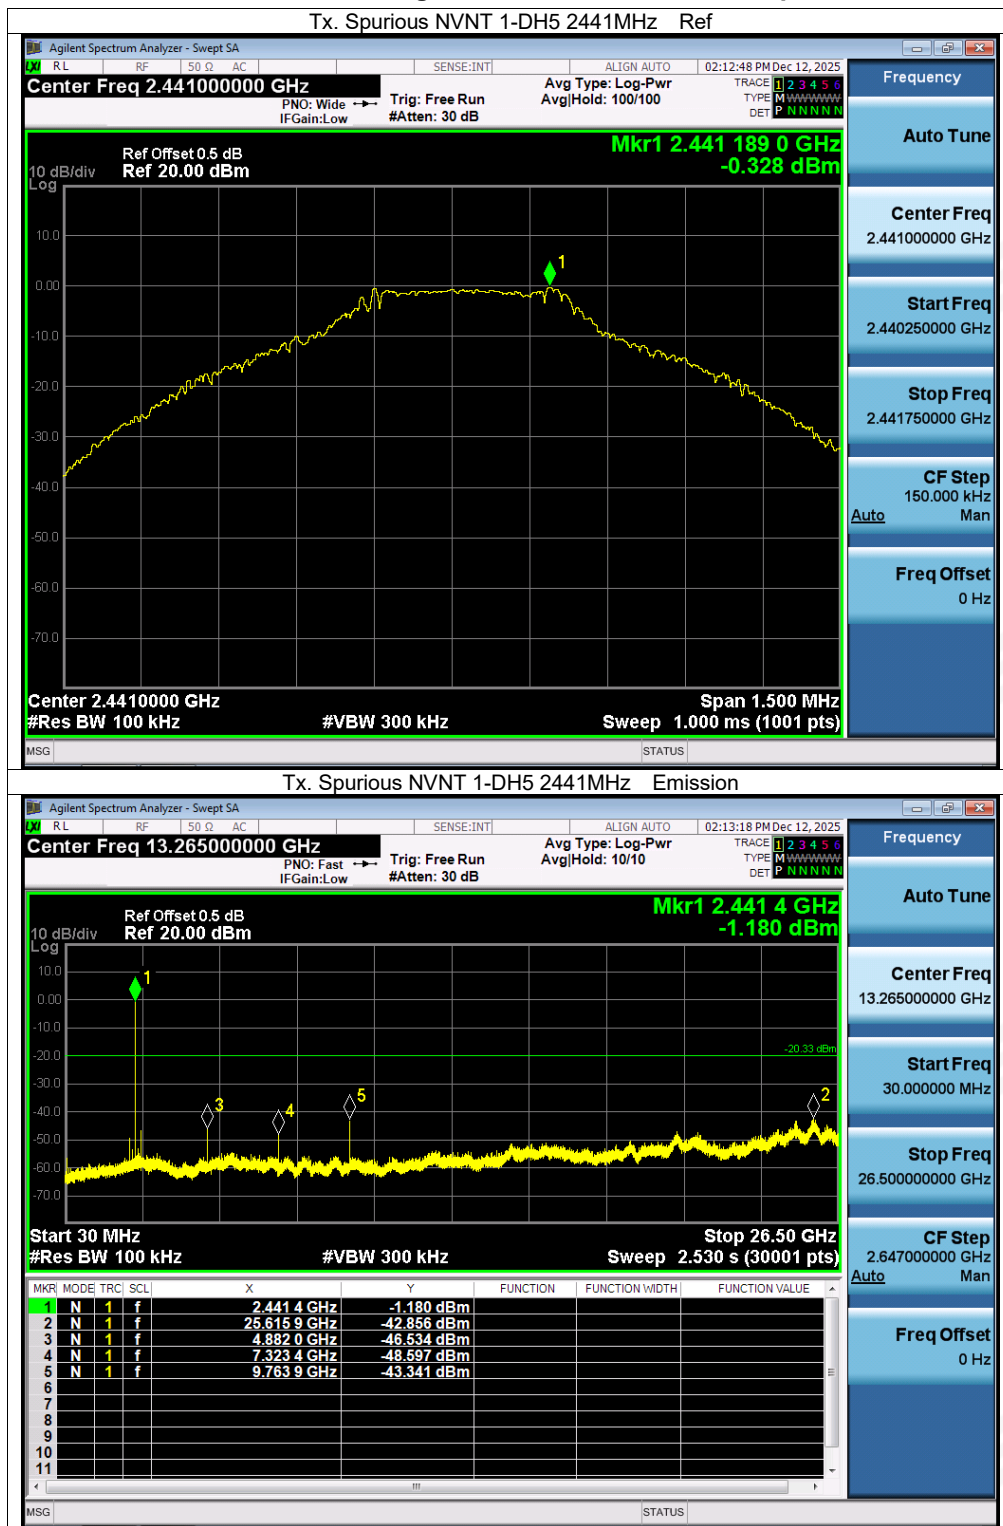


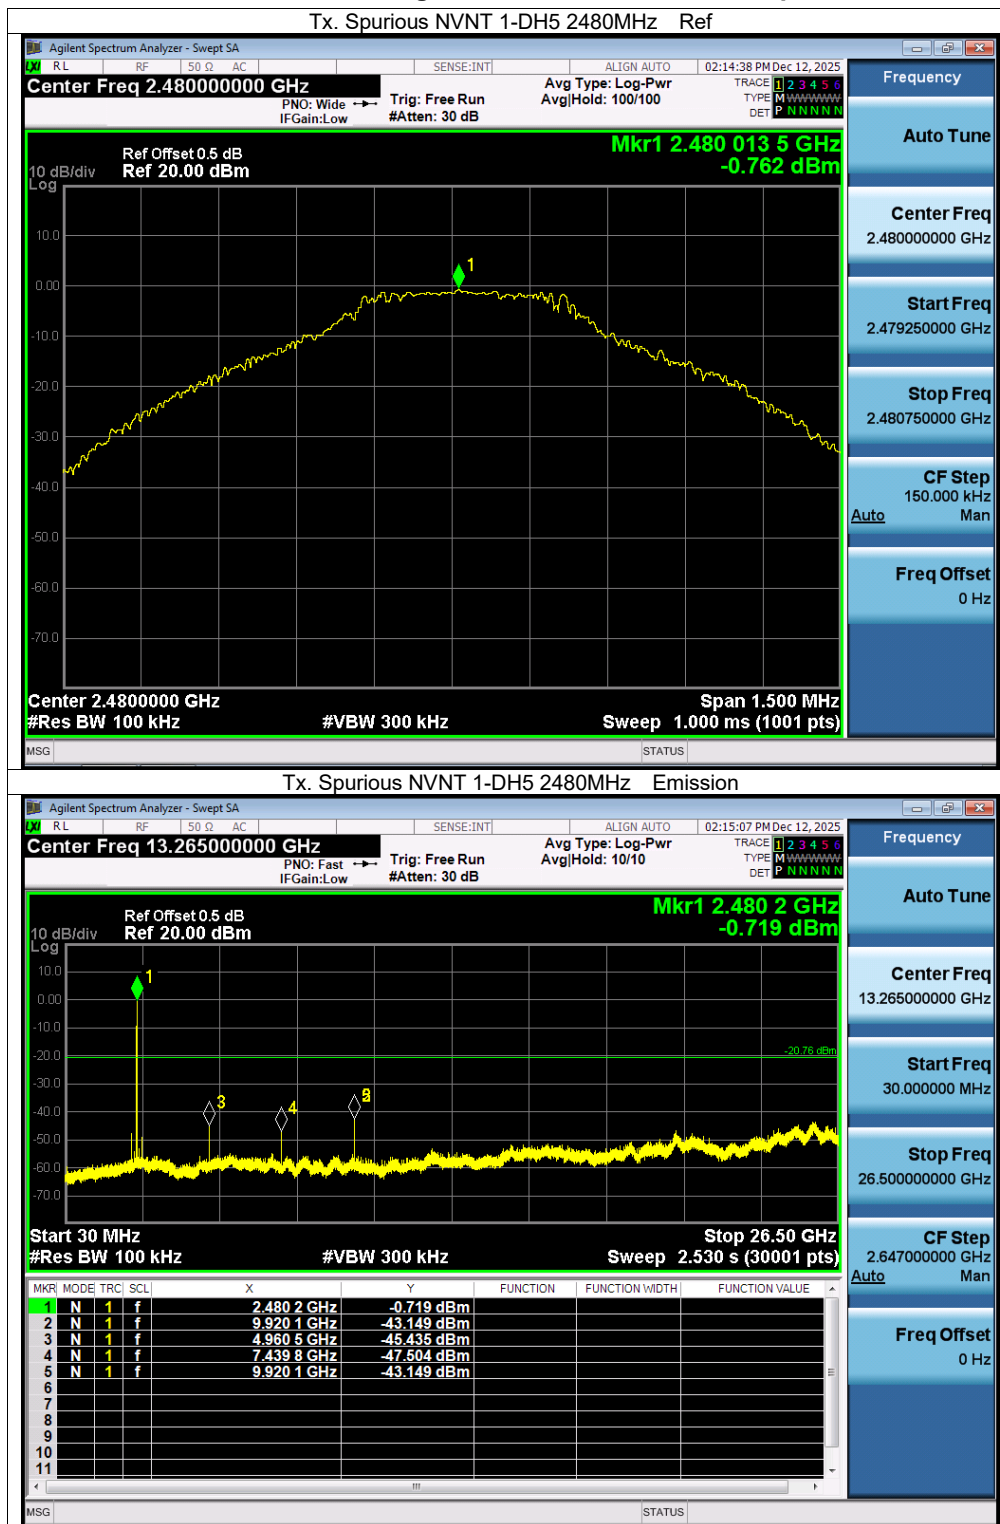


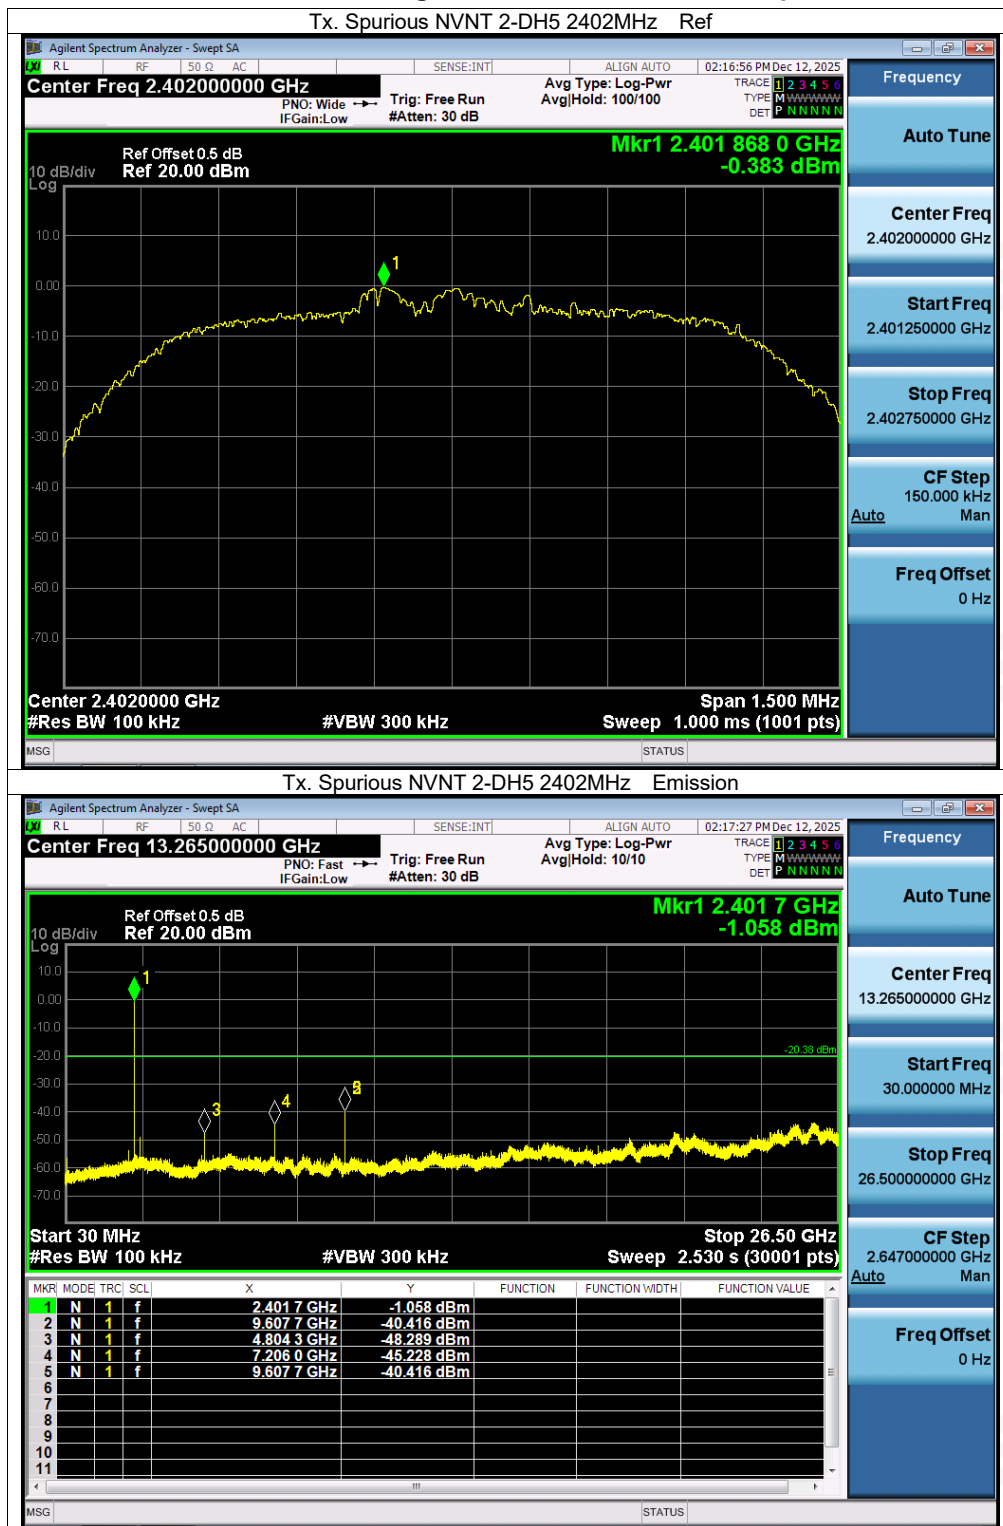


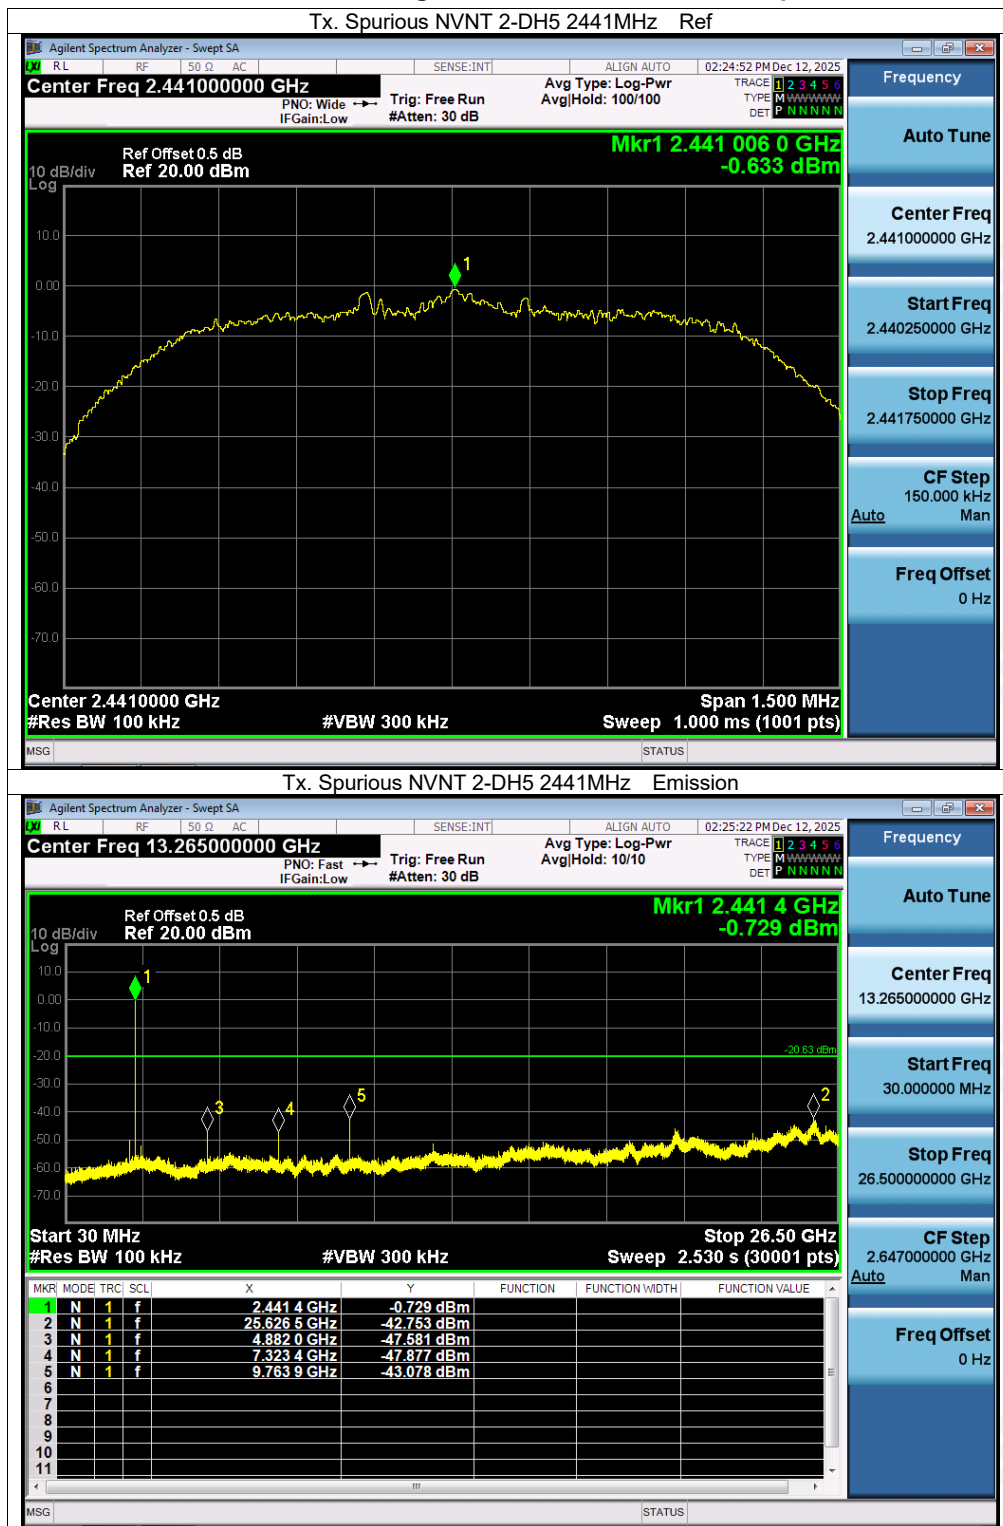

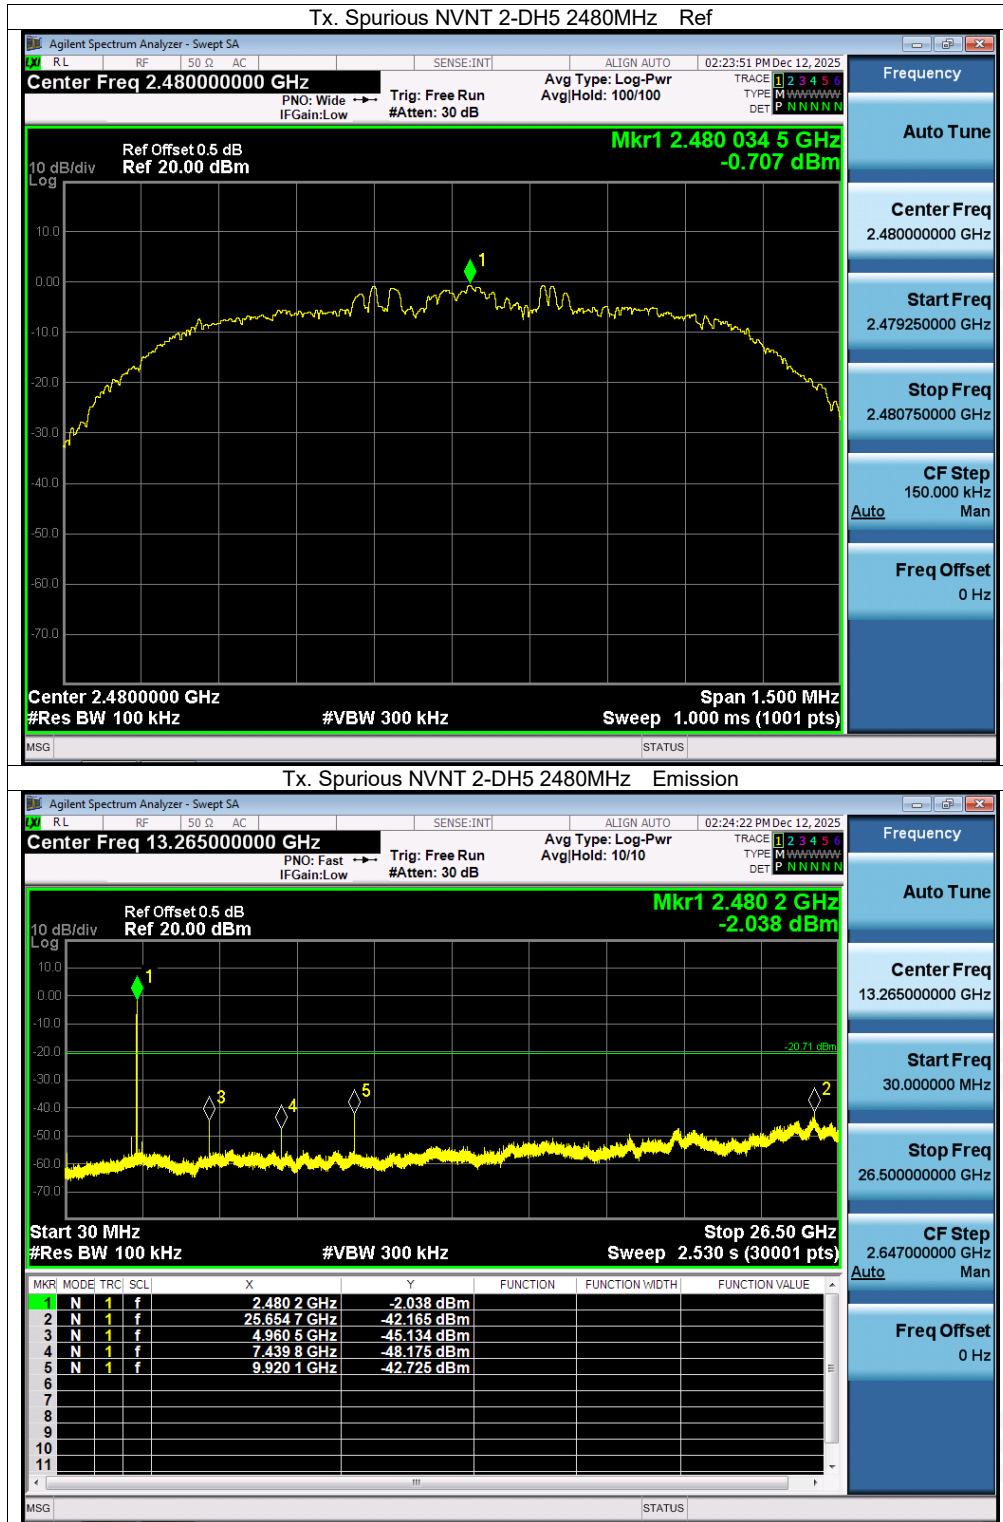

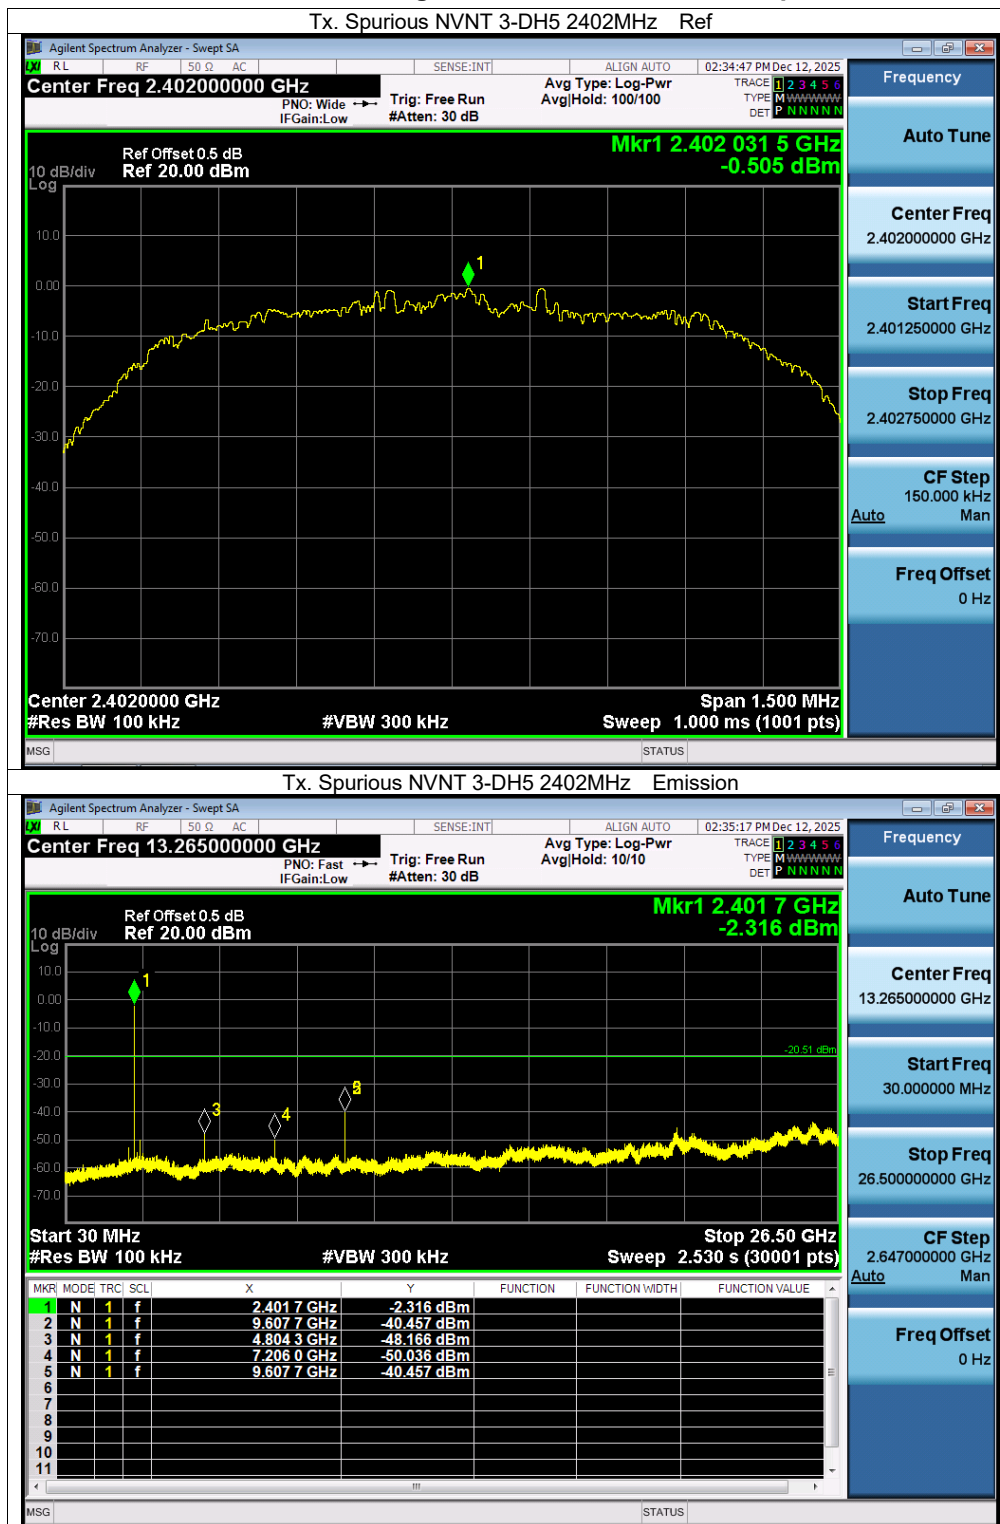

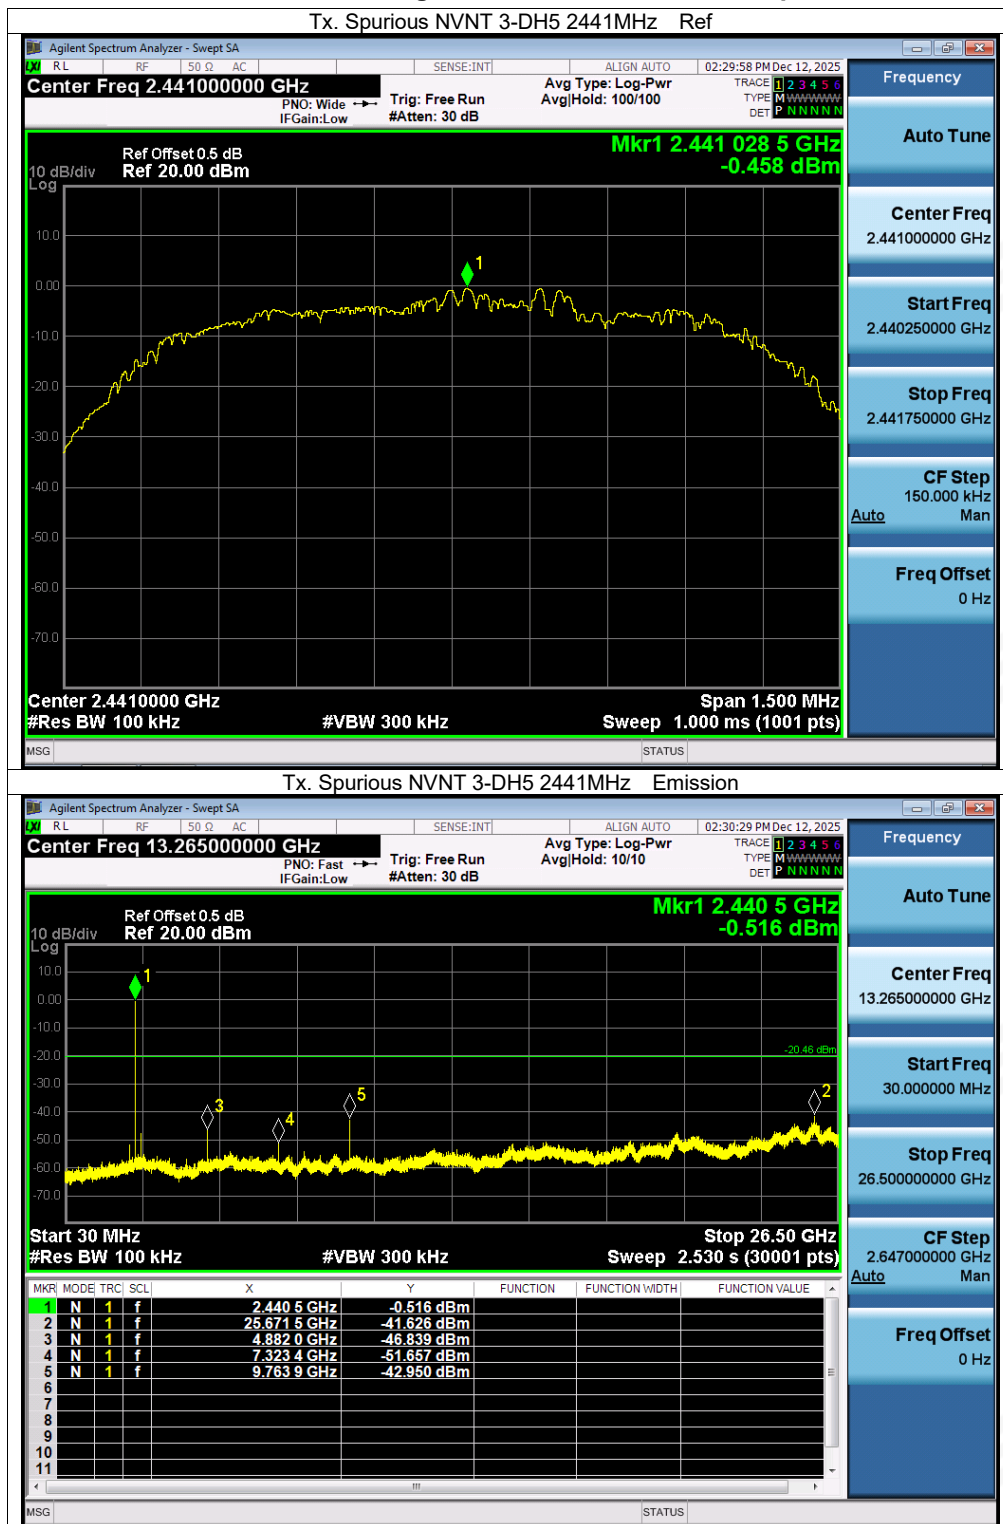

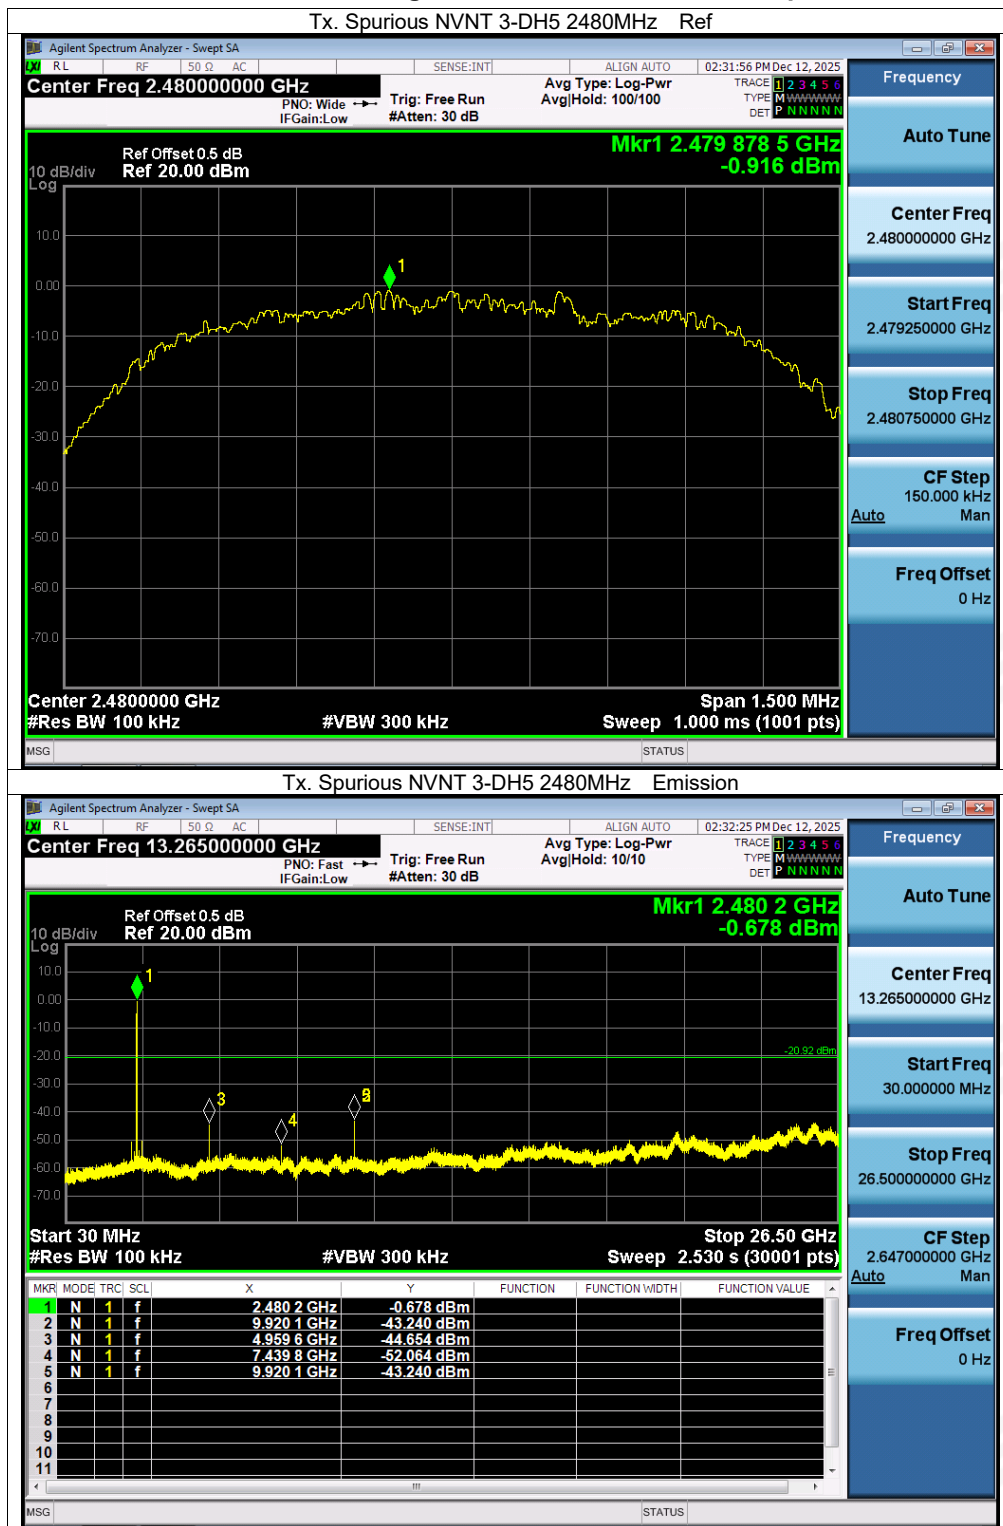



APPENDIX 2-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****