

RF TEST REPORT

FCC ID: 2BTG5-SYBRAN

Test Report No.....: RF260618001-03-002

Product(s) Name.....: CODE27 Companion Hub

Model(s).....: SyBran-01

Trade Mark.....: CODE27

Applicant.....: SyBran Innovation Co., Ltd.

Address.....: 804, Bldg 5A, Block C, Chuangzhiyuncheng Phase II, Xingke 1st Rd,
Xili St Nanshan, Shenzhen, China

Receipt Date.....: 2026.06.18

Test Date.....: 2026.06.22 ~ 2026.07.02

Issued Date.....: 2026.07.03

Standards.....: 47 CFR FCC Part 15, Subpart E(Section 15.407);
ANSI C63.10-2020+Cor. 1-2023

Testing Laboratory.....: Shenzhen Haiyun Standard Technical Co., Ltd.

Prepared By:	Checked By:	Approved By:	
Jason Huang	Black Ding	Tim Zhang	
<i>Jason Huang</i>	<i>Black Ding</i>	<i>Tim Zhang</i>	

Table of Contents

History of this test report.....	4
1. General Information	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Basic Description of Equipment Under Test	5
1.4 Transmit Operating Mode	6
2. Summary of Test Results	7
2.1 Summary of Test Items	7
2.2 Application of Standard	7
2.3 Test Instruments	8
2.4 Operation Mode	9
2.5 Test Condition	9
2.6 Duty Cycle of Test Signal	9
2.7 Measurement Uncertainty	13
2.8 Test Location	13
2.9 SUPPORT UNITS	13
3. Test Procedure And Results	14
3.1 AC Power Line Conducted Emission	14
3.1.1 Limit	14
3.1.2 Test Procedure	14
3.1.3 Test Setup	14
3.1.4 Test Result	15
3.2 Radiated Emission	19
3.2.1 Limit	19
3.2.2 Test Procedure	20
3.2.3 Test Setup	21
3.2.4 Test Result	22
3.3 Spectrum Bandwidth	153
3.3.1 Limit	153
3.3.2 Test Procedure	153
3.3.3 Test Setup	154
3.3.4 Test Result	154

3.4	Conducted Output Power.....	354
3.4.1	Limit.....	354
3.4.2	Test Procedure	354
3.4.3	Test Setup	354
3.4.4	Table of Parameters of Text Software Setting.....	355
3.4.5	The Result.....	357
3.5	Power Spectral Density.....	363
3.5.1	Limit.....	363
3.5.2	Test Procedure	363
3.5.3	Test Setup	364
3.5.4	The Result.....	364

History of this test report

Original Report Issue Date: 2026.07.03

- No additional attachment
- Additional attachments were issued following record

Attachment No.	Issue Date	Description

1. General Information

1.1 Applicant

SyBran Innovation Co., Ltd.

804, Bldg 5A, Block C, Chuangzhiyuncheng Phase II, Xingke 1st Rd, Xili St Nanshan, Shenzhen, China

1.2 Manufacturer

SyBran Innovation Co., Ltd.

804, Bldg 5A, Block C, Chuangzhiyuncheng Phase II, Xingke 1st Rd, Xili St Nanshan, Shenzhen, China

1.3 Basic Description of Equipment Under Test

Sample No.	POC260618001-S001	
Product name	CODE27 Companion Hub	
Model name	SyBran-01	
Trade Mark	CODE27	
Power supply	DC 20V from adapter	
Adapter1 information	Model name: A849-200225C-US1 Input: 100-240V~, 50/60Hz, 1.5A Output: 5V===3A, 9V===3A, 12V===3A, 15V===3A, 20V===2.25A, 3.3-16V===3A 45W Max, 3.3-21V===2.25A 45W Max	
Adapter2 information	Model name: TEKA-PC1A45WUS Input: 100-240V~, 50/60Hz, 1.2A MAX Output: 5.0V===3.0A 15.0W, 9.0V===3.0A 27.0W, 12.0V===3.0A 36.0W, 15.0V===3.0A 45.0W, 20.0V===2.25A 45.0W	
Operate temperature	0℃-45℃	
EUT Stage	○ Product Unit	● Final-Sample
Operating Band & Max Conducted Output Power	5150MHz ~5250MHz	802.11ac80: 16.06dBm(0.040W)
	5250MHz ~5350MHz	802.11ax40: 16.59dBm(0.046W)
	5470MHz ~5725MHz	802.11ax40: 17.40dBm(0.055W)
	5725MHz ~5850MHz	802.11ac80: 17.24dBm(0.053W)
Product Type	IEEE 802.11a/n/ac/ax: WLAN (MIMO)	
Nominal Bandwidth	20MHz / 40MHz / 80MHz	
Modulation	OFDM, OFDMA	
Antenna gain	ANT1: 5.56dBi; ANT2: 5.56dBi	
Antenna type	FPC Antenna	
Data Rate (Mbps)	IEEE 802.11a mode: 6/9/12/18/24/36/48/54 IEEE 802.11n mode: up to 300 IEEE 802.11ac mode: up to 866.6 IEEE 802.11ax mode: up to 1201	
Type of Device	Slaver device	

Channel Information			
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	802.11a /n /ac /ax (20MHz)	5180-5240	36-48
5250-5350		5260-5320	52-64
5470-5725		5500-5700	100-140
5725-5850		5745-5825	149-165
5150-5250	802.11n /ac /ax (40MHz)	5190-5230	38-46
5250-5350		5270-5310	54-62
5470-5725		5510-5670	102-134
5725-5850		5755-5795	151-159
5150-5250	802.11ac /ax (80MHz)	5210	42
5250-5350		5290	58
5470-5725		5530-5610	106-122
5725-5850		5775	155

Note: For 802.11ax mode only support full RU mode.

1.4 Transmit Operating Mode

Transmit Operating Mode					Transmit Multiple Antennas					
☐	Operating mode 1 (single antenna)				☐	1TX				
☒	Operating mode 2 (multiple antenna, no beam forming)				☒	2TX	☐	3TX	☐	4TX
☐	Operating mode 3 (multiple antenna, with beam forming)				☐	2TX	☐	3TX	☐	4TX
☒	802.11a	Operating mode	☐	1TX	☒	2TX	☐	3TX	☐	4TX
☒	802.11n(20MHz)	Operating mode	☐	1TX	☒	2TX	☐	3TX	☐	4TX
☒	802.11n(40MHz)	Operating mode	☐	1TX	☒	2TX	☐	3TX	☐	4TX
☒	802.11ac(20MHz)	Operating mode	☐	1TX	☒	2TX	☐	3TX	☐	4TX
☒	802.11ac(40MHz)	Operating mode	☐	1TX	☒	2TX	☐	3TX	☐	4TX
☒	802.11ac(80MHz)	Operating mode	☐	1TX	☒	2TX	☐	3TX	☐	4TX
☒	802.11ax(20MHz)	Operating mode	☐	1TX	☒	2TX	☐	3TX	☐	4TX
☒	802.11ax(40MHz)	Operating mode	☐	1TX	☒	2TX	☐	3TX	☐	4TX
☒	802.11ax(80MHz)	Operating mode	☐	1TX	☒	2TX	☐	3TX	☐	4TX

2. Summary of Test Results

2.1 Summary of Test Items

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Test item	Standard	Results	Remarks
AC Power Conducted Emission	15.207 15.407(b)	Pass	Meet the requirement of the limit
Radiated Emission	15.205(a) 15.209(a) 15.407(b)	Pass	Meet the requirement of the limit
Antenna Requirements	15.203	Compliance	Note 1
Spectrum Bandwidth	15.407(a) 15.407(e)	Pass	Meet the requirement of the limit
Conducted Output Power	15.407(a)	Pass	Meet the requirement of the limit
Power Spectral Density	15.407(a)	Pass	Meet the requirement of the limit
Frequency Stability	15.407(g)	---	Note 2
Note: 1. The EUT has two FPC antennas arrangement which was permanently attached. 2. The item is declared by the manufacturer.			

2.2 Application of Standard

47 CFR FCC Part 15, Subpart E

KDB 662911 D01 Multiple Transmitter Output v02r01

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

ANSI C63.10-2020+Cor. 1-2023

2.3 Test Instruments

No.	Name of Equipment	Manufacturer	Model Number	Serial Number	Inventory No.	Last Calibration	Due Calibration
Radiated Emission							
1	Test receiver	Rohde&Schwarz	ESU	100184	JLE011	2026/2/27	2027/2/26
2	Log periodic antenna	Schwarzbeck	VULB 9168	1151	JLE012	2025/4/12	2028/4/11
3	Low frequency amplifier	/	LNA 0920N	2014	JLE023	2026/2/27	2027/2/26
4	High frequency amplifier	Schwarzbeck	BBV 9718	9718-284	JLE024	2026/2/27	2027/2/26
5	Horn Antenna	SCHWARZBECK	BBHA 9120 D	02670	JLE028	2025/4/12	2028/4/11
6	Temp&Humidity Recorder	Meideshi	JR900	/	JLE021	2026/4/8	2027/4/7
7	Horn Antenna	SCHWARZBECK	BBHA 9170	9170#685	JLE029	2024/7/15	2027/7/14
8	Loop Antenna	SCHWARZBECK	FMZB1519B	00029	JLE030	2024/7/15	2027/7/14
9	Broadband preamplifier	Schwarzbeck	BBV9721	9721-019	JLE025	2026/2/27	2027/2/26
10	Filter	dsusoft	ZBSF6-C5170-5330-544	07227557	/	N/A	N/A
11	Filter	dsusoft	ZBSF6-C5495-5705-1309	07227558	/	N/A	N/A
12	Filter	dsusoft	ZBSF6-C5745-5830-1310	07227559	/	N/A	N/A
13	Filter	dsusoft	ZBSF6-C2400-2483.5-543	07227559	/	N/A	N/A
14	10dB attenuator	dsusoft	10dB	/	/	N/A	N/A
15	Filter	dsusoft	ZBSF6-C3000-18000-174	07227597	/	N/A	N/A
16	Filter	dsusoft	ZBSF6-C6500-18000-547	07227595	/	N/A	N/A
17	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2				
Conducted Emission							
1	LISN	Rohde&Schwarz	ENV216	100075	JLE002	2026/2/27	2027/2/26
2	ISN	Schwarzbeck	CATE 5 8158	#171	JLE003	2026/2/27	2027/2/26
3	ISN	Schwarzbeck	CAT 3 8158	00187	JLE032	2026/2/27	2027/2/26
4	Test receiver	Rohde&Schwarz	ESCI	100718	JLE010	2026/2/27	2027/2/26
5	Pulse limiter	Rohde&Schwarz	ESH3-Z2	102299	JLE047	2026/2/27	2027/2/26
6	Temp&Humidity Recorder	Meideshi	JR900	/	JLE020	2026/4/8	2027/4/7
7	Test software	Farad Technology Co., Ltd	EZ-EMC Ver.TW-03A2				
RF Conducted Emissions							
1	MXA Signal Analyzer	Keysight	N9010A	MY51440158	JLE087	2025/9/15	2026/9/14
2	Spectrum Analyzer	Rohde&Schwarz	FSV40-N	6625-01-588-5515	JLE120	2026/1/19	2027/1/18
3	RF Control Unit	dsusoft	JS0806-2	21G8060449	JLE053	2026/2/27	2027/2/26
4	power supply unit	dsusoft	JS0806-4ADC	N/A	JLE055	2026/2/27	2027/2/26
5	VXG Signal Generator	Keysight	N5182B	MY59100855	JLE068	2026/4/8	2027/4/7
6	EXG Analog Signal Generator	Keysight	N5173B	MY59101282	JLE052	2026/2/27	2027/2/26
7	Wideband Radio Communication Tester	Rohde&Schwarz	CMW500	1201.0002K5 0-116064-Dt	JLE054	2026/2/27	2027/2/26
8	Test software	dsusoft	JS1120-3 Ver.3.2.22.0				

2.4 Operation Mode

The EUT was supplied by and it was run in TX mode that was controlled by Master provided RF testing program. The worst case test result was showed in the report.

2.5 Test Condition

Test Item	Environmental conditions	Input Power	Tested by
AC Power Conducted Emission	22.8°C, 54% RH	AC 120V/60Hz	Keith Huang
Radiated Emission	24.1°C, 56% RH	AC 120V/60Hz	Lemon He
Spectrum Bandwidth	23.5°C, 52% RH	DC 20V	Elio Lin
Conducted Power	23.5°C, 52% RH	DC 20V	Elio Lin
Power Spectral Density	23.5°C, 52% RH	DC 20V	Elio Lin

Note: Adapter supply voltage AC 120V/60Hz.

The applicant declare the operating environment of EUT as below:

Normal conditions: 20V DC, 0~45°C

2.6 Duty Cycle of Test Signal

If duty cycle is $\geq 98\%$, duty factor is not required.


If duty cycle is $< 98\%$, duty factor shall be considered.

All the duty factor of other test mode have been considered.


Test Mode	Freq(MHz)	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11A-CDD	5180	1.38	2.01	68.66
11N20MIMO	5180	1.30	1.93	67.36
11N40MIMO	5190	0.65	1.28	50.78
11AC20MIMO	5180	0.68	1.32	51.52
11AC40MIMO	5190	0.35	0.98	35.71
11AC80MIMO	5210	0.18	0.81	22.22
11AX20MIMO	5180	0.55	1.18	46.61
11AX40MIMO	5190	0.32	0.95	33.68
11AX80MIMO	5210	0.19	0.83	22.89

Test Graphs


11A-CDD_5180

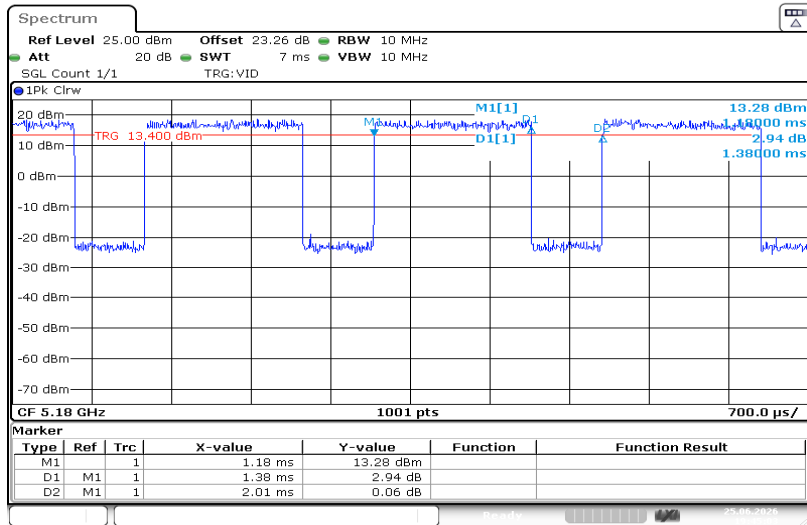


NTNV-11N20MIMO-5180

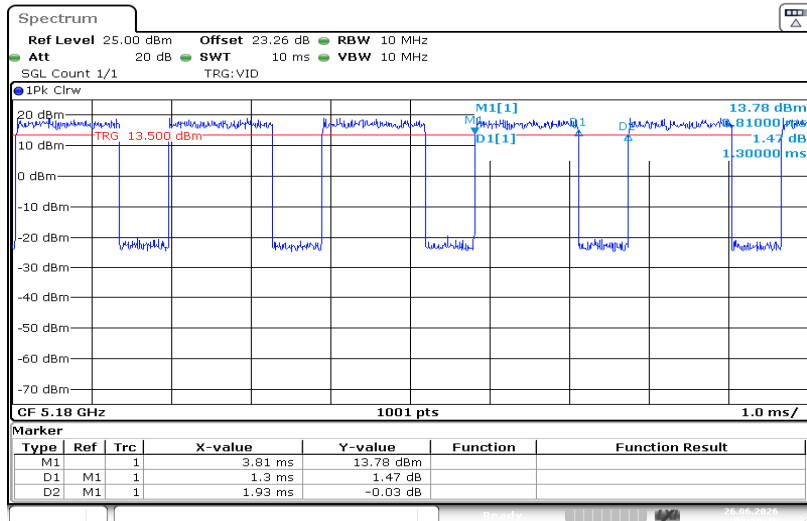


NTNV-11N40MIMO-5190

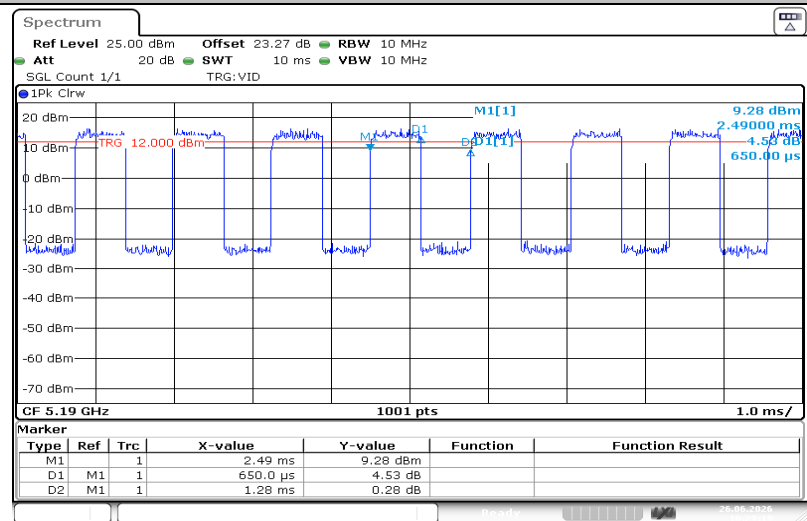


NTNV-11AC20MIMO-5180

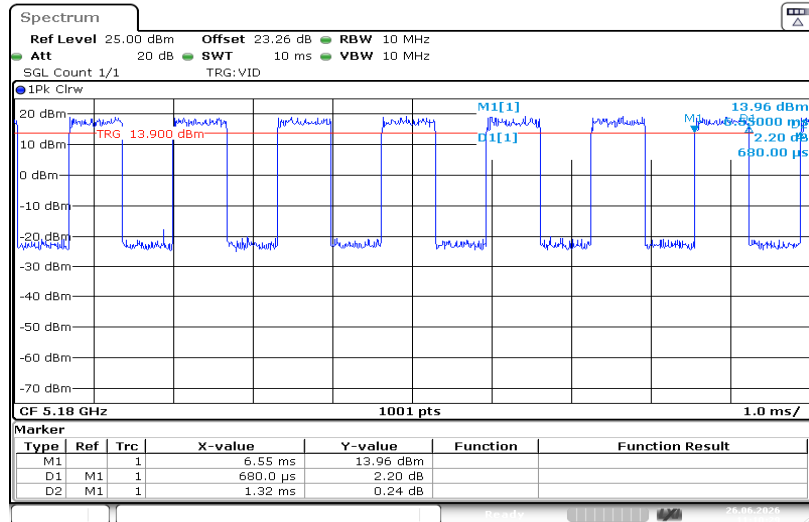


NTNV-11AC40MIMO-5190

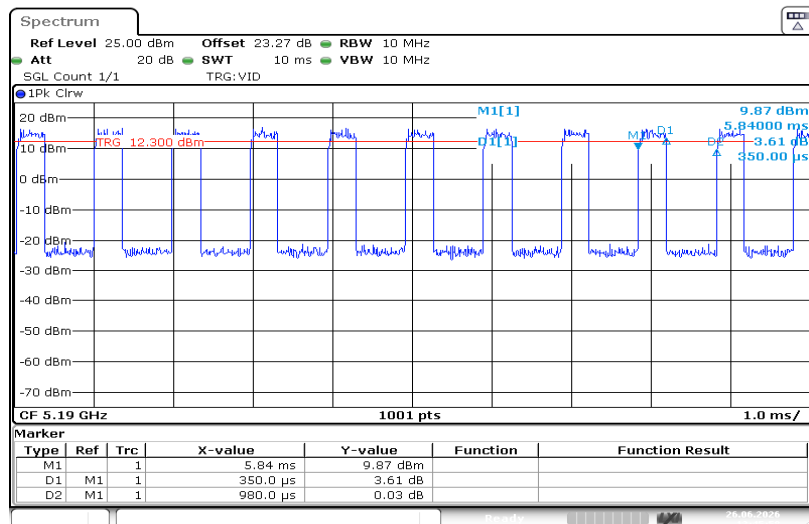


NTNV-11AC80MIMO-5210

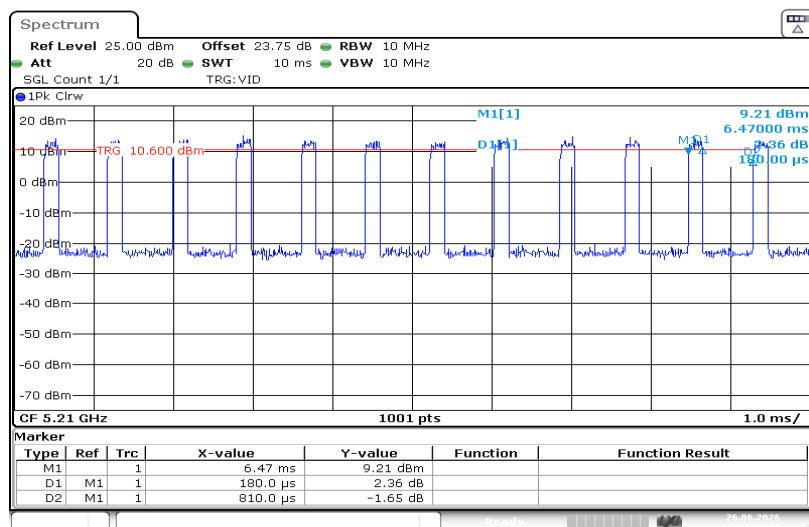


NTNV-11AX20MIMO-5180

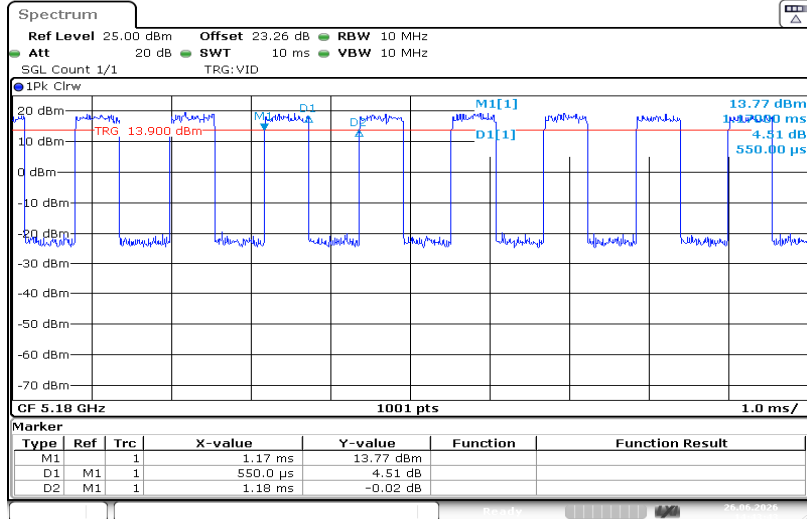

NTNV-11AX40MIMO-5190

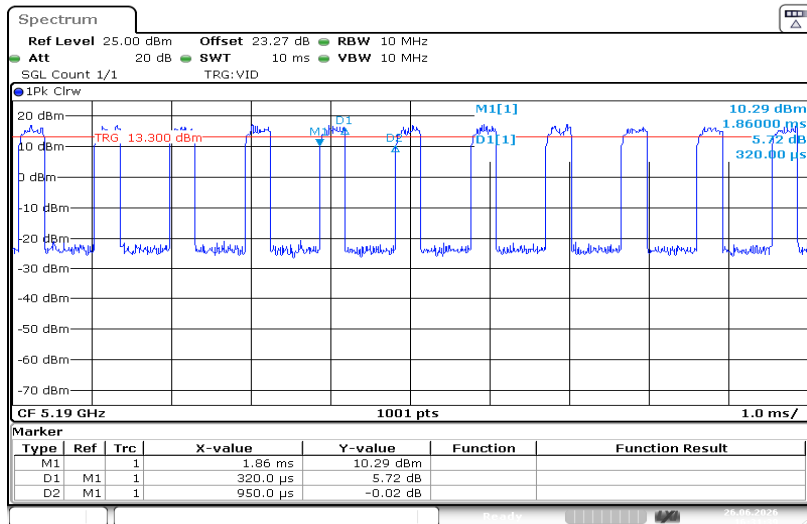

NTNV-11AX80MIMO-5210

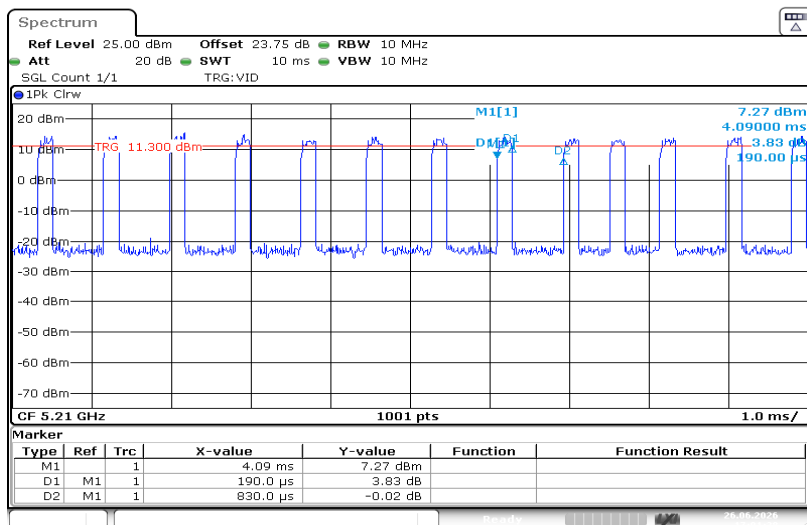

2.7 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 102\text{kHz}$
Power Spectral Density	$\pm 0.243\text{dB}$
Conducted Spurious Emission	$\pm 0.743\text{dB}$
RF power conducted	$\pm 1.328\text{dB}$
Conducted emission(9kHz~30MHz) AC main	$\pm 2.68\text{dB}$
Radiated emission(9kHz~30MHz)	$\pm 3.50\text{dB}$
Radiated emission (30MHz~1GHz)	$\pm 4.20\text{dB}$
Radiated emission (1GHz~18GHz)	$\pm 5.10\text{dB}$
Radiated emission (18GHz~40GHz)	$\pm 5.26\text{dB}$

2.8 Test Location

Company:	Shenzhen Haiyun Standard Technical Co., Ltd.
Address:	No. 110-113, 115, 116, Block B, Jinyuan Business Building, Bao'an District, Shenzhen, China
CNAS Registration Number:	CNAS L18252
CAB identifier:	CN0145
A2LA Certificate Number:	6823.01

2.9 SUPPORT UNITS

No.	Equipment	Model	Manufacturer	Series No
1	TF Card	4GB	Kingston	/
2	Earphone	E1	/	/

3. Test Procedure And Results

3.1 AC Power Line Conducted Emission

3.1.1 Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.


2. The lower limit shall apply at the transition frequencies.

3.1.2 Test Procedure

Test Method	
●Conducted Measurement	○Radiated Measurement
Test Channels	
○ Lowest, Middle and Highest Channel	○ Lowest and Highest Channel
Environmental conditions	
●Normal	○Normal and Extreme
Note:●:Test ○:No Test	

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

3.1.3 Test Setup

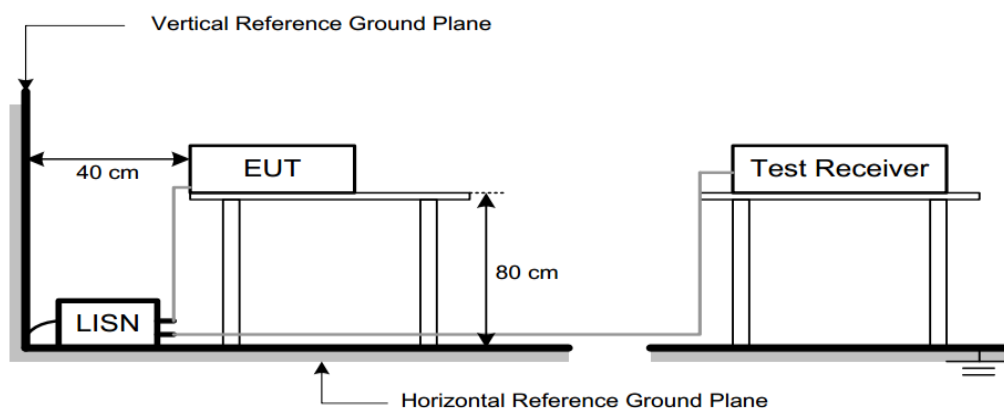

3.1.4 Test Result


Note:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Measurement = Reading + Correct Factor.
3. Over = Measurement – Limit
4. The TX 11AX40MIMO Mode Channel 110 is found to be the worst case and recorded.

For adapter1


150kHz~30MHz	TX 11AX40MIMO Mode Channel 110
--------------	--------------------------------

Line

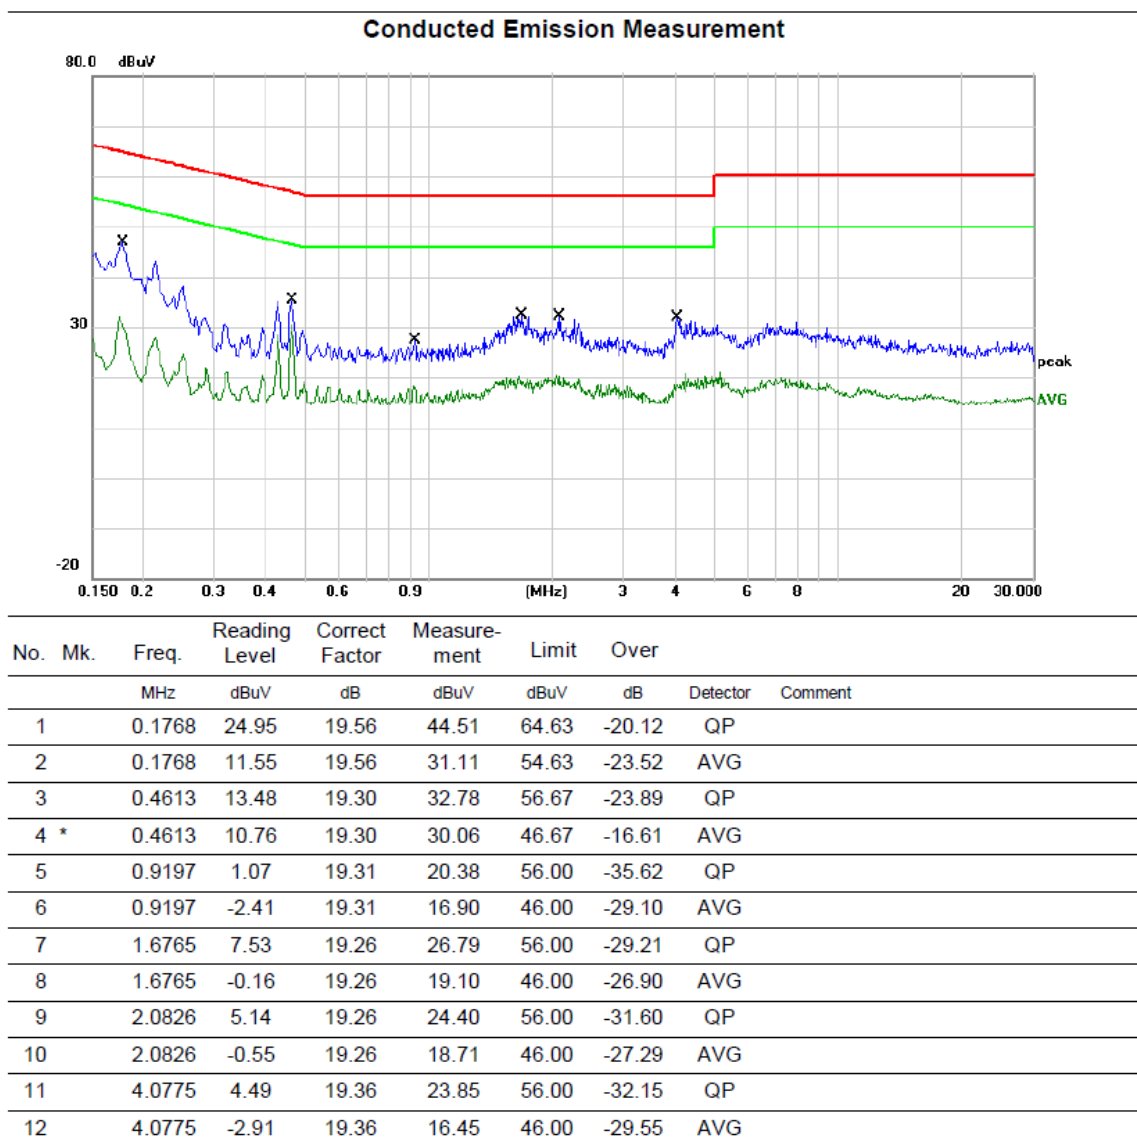

Neutral

Conducted Emission Measurement

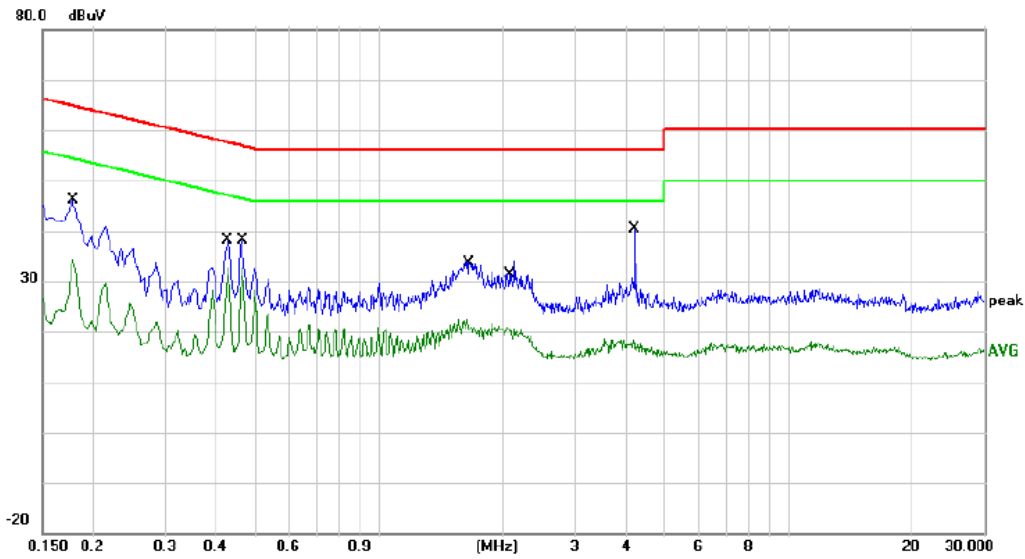


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1785	24.34	19.52	43.86	64.56	-20.70	QP	
2		0.1785	11.21	19.52	30.73	54.56	-23.83	AVG	
3		0.4257	16.75	19.56	36.31	57.34	-21.03	QP	
4	*	0.4257	13.96	19.56	33.52	47.34	-13.82	AVG	
5		0.4620	15.38	19.56	34.94	56.66	-21.72	QP	
6		0.4620	12.56	19.56	32.12	46.66	-14.54	AVG	
7		1.6602	9.15	19.53	28.68	56.00	-27.32	QP	
8		1.6602	0.53	19.53	20.06	46.00	-25.94	AVG	
9		2.1133	5.61	19.55	25.16	56.00	-30.84	QP	
10		2.1133	-0.60	19.55	18.95	46.00	-27.05	AVG	
11		4.1946	2.99	19.45	22.44	56.00	-33.56	QP	
12		4.1946	-3.20	19.45	16.25	46.00	-29.75	AVG	

For adapter2


150kHz~30MHz	TX 11AX40MIMO Mode Channel 110
--------------	--------------------------------

Line

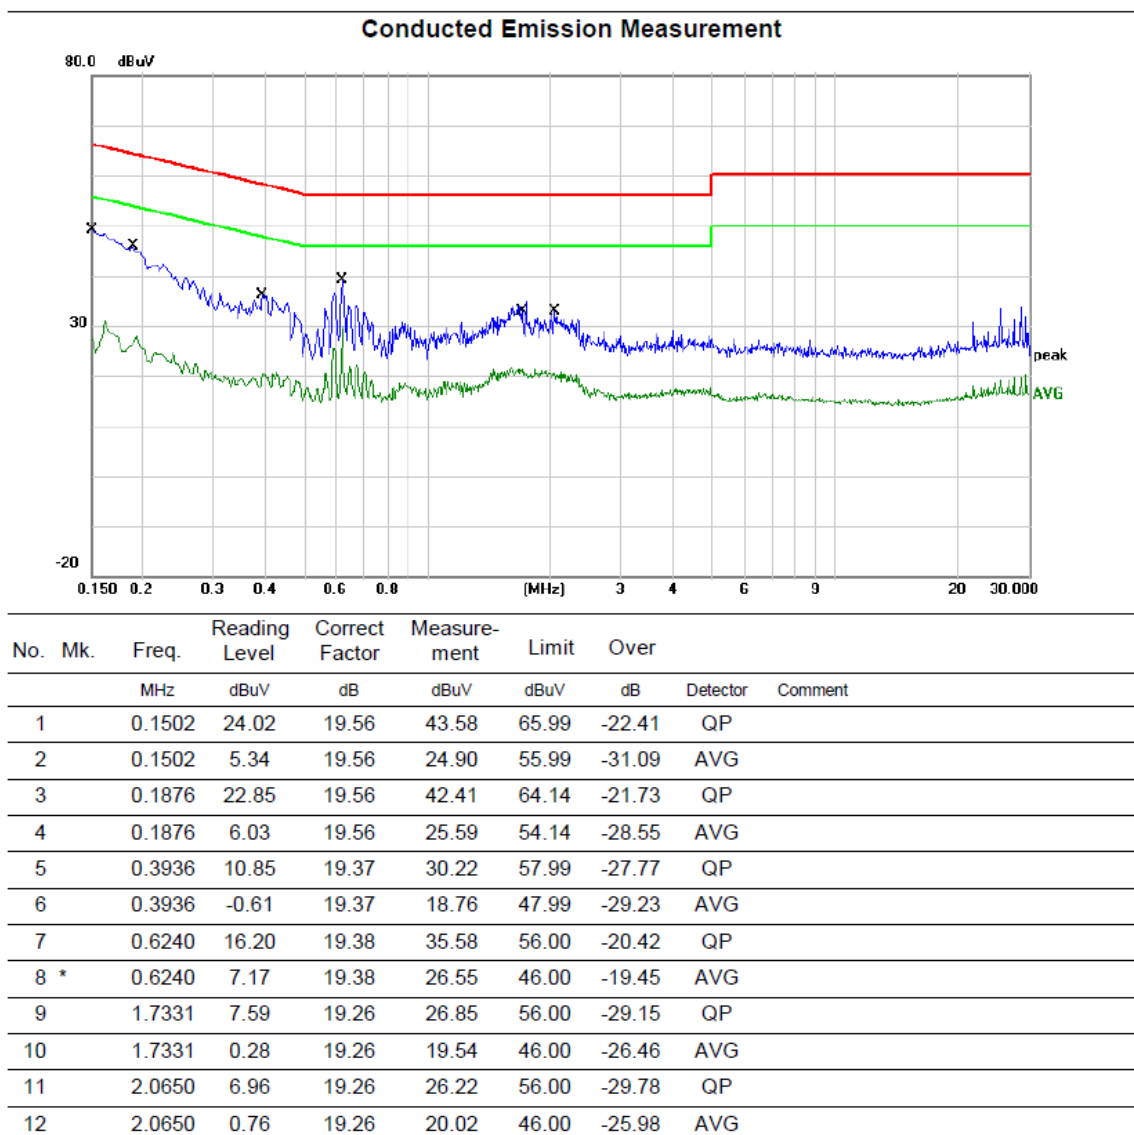

Neutral

Conducted Emission Measurement

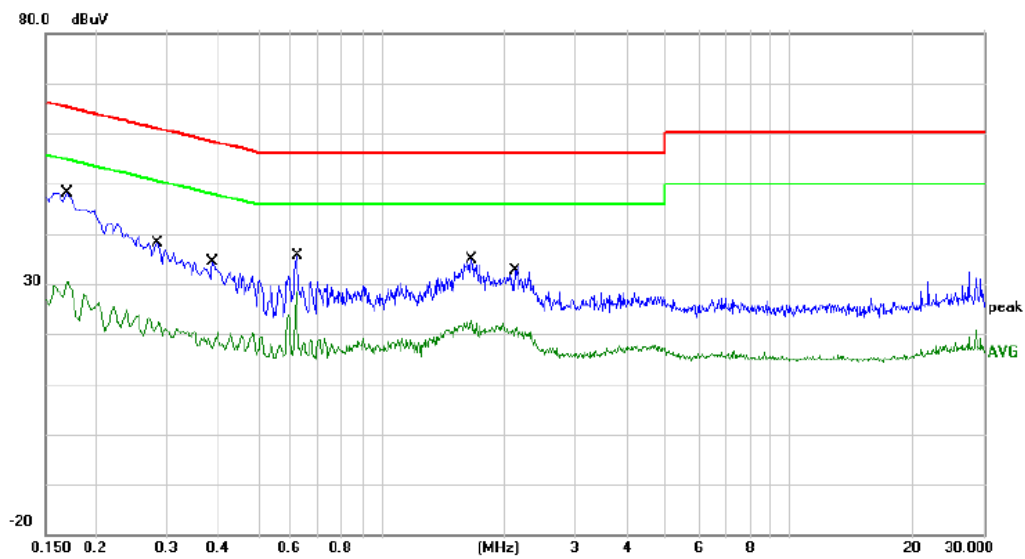

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1690	25.43	19.50	44.93	65.01	-20.08	QP	
2		0.1690	8.35	19.50	27.85	55.01	-27.16	AVG	
3		0.2807	13.82	19.56	33.38	60.80	-27.42	QP	
4		0.2807	0.85	19.56	20.41	50.80	-30.39	AVG	
5		0.3870	6.48	19.56	26.04	58.13	-32.09	QP	
6		0.3870	-2.24	19.56	17.32	48.13	-30.81	AVG	
7		0.6156	12.33	19.50	31.83	56.00	-24.17	QP	
8		0.6156	5.24	19.50	24.74	46.00	-21.26	AVG	
9		1.6607	9.37	19.53	28.90	56.00	-27.10	QP	
10		1.6607	1.60	19.53	21.13	46.00	-24.87	AVG	
11		2.1384	6.91	19.55	26.46	56.00	-29.54	QP	
12		2.1384	0.59	19.55	20.14	46.00	-25.86	AVG	

3.2 Radiated Emission

3.2.1 Limit

1) Limit of radiated emission measurement:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequency (MHz)	Distance Meters(m)	Field Strength Limit	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 – 0.49	300	$2400/\text{F}(\text{kHz})$	-
0.490 – 1.705	30	$24000/\text{F}(\text{kHz})$	-
1.705 – 30	30	30	-
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

2) Limit of unwanted emission out of the restricted bands:

Frequency(MHz)	EIRP Limit(dBm/MHz)	Equivalent Field Strength at 3m($\text{dB}\mu\text{V}/\text{m}$)
5150-5250	-27	68.2
5250-5350	-27	68.2
5470-5725	-27	68.2
5725-5850	-27 NOTE (2)	68.2
	10 NOTE (2)	105.2
	15.6 NOTE (2)	110.8
	27 NOTE (2)	122.2

Note: (1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength: $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d=3\text{m}$

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


3.2.2 Test Procedure

Test Method	
○Conducted Measurement	●Radiated Measurement
Test Channels	
●Lowest, Middle and Highest Channel	○ Lowest and Highest Channel
Environmental conditions	
●Normal	○Normal and Extreme
Note:●:Test ○:No Test	


- a) The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. (below 1 GHz)
- b) The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. (above 1GHz)
- c) The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e) The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f) The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g) All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h) All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i) For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.2.3 Test Setup


(A) Radiated Emission Test Set-Up Frequency Below 30 MHz

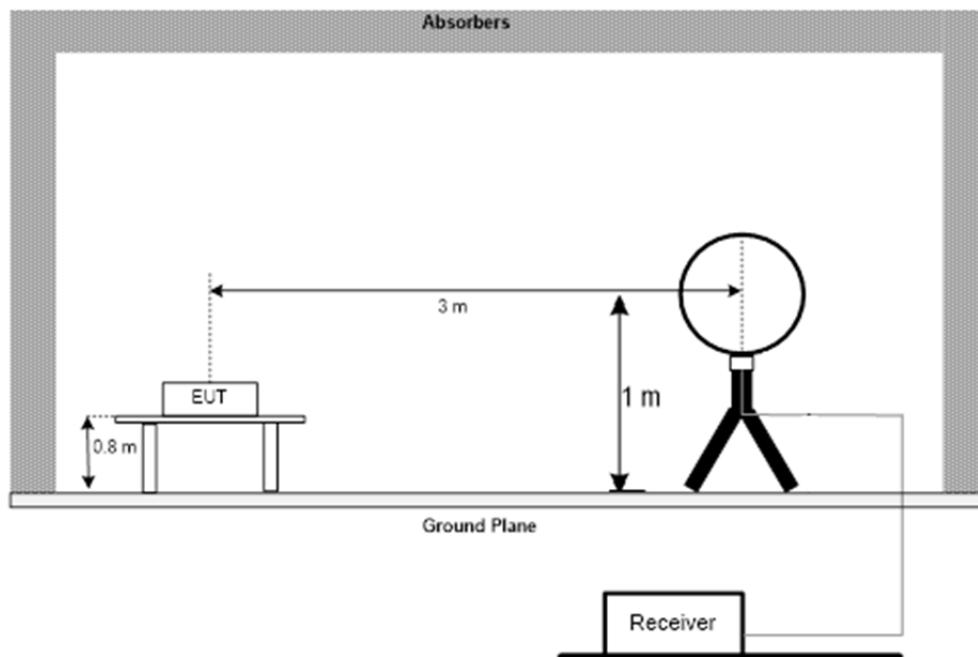

(B) Radiated Emission Test Set-Up Frequency 30 MHz-1000 MHz

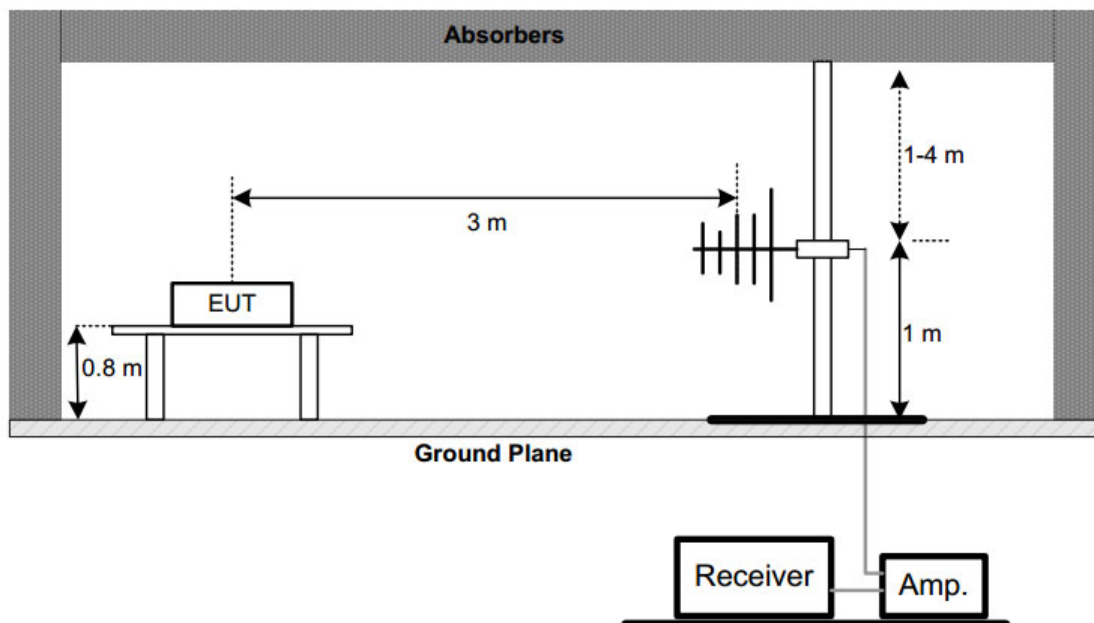

(C) Radiated Emission Test Set-Up Frequency Above 1 GHz

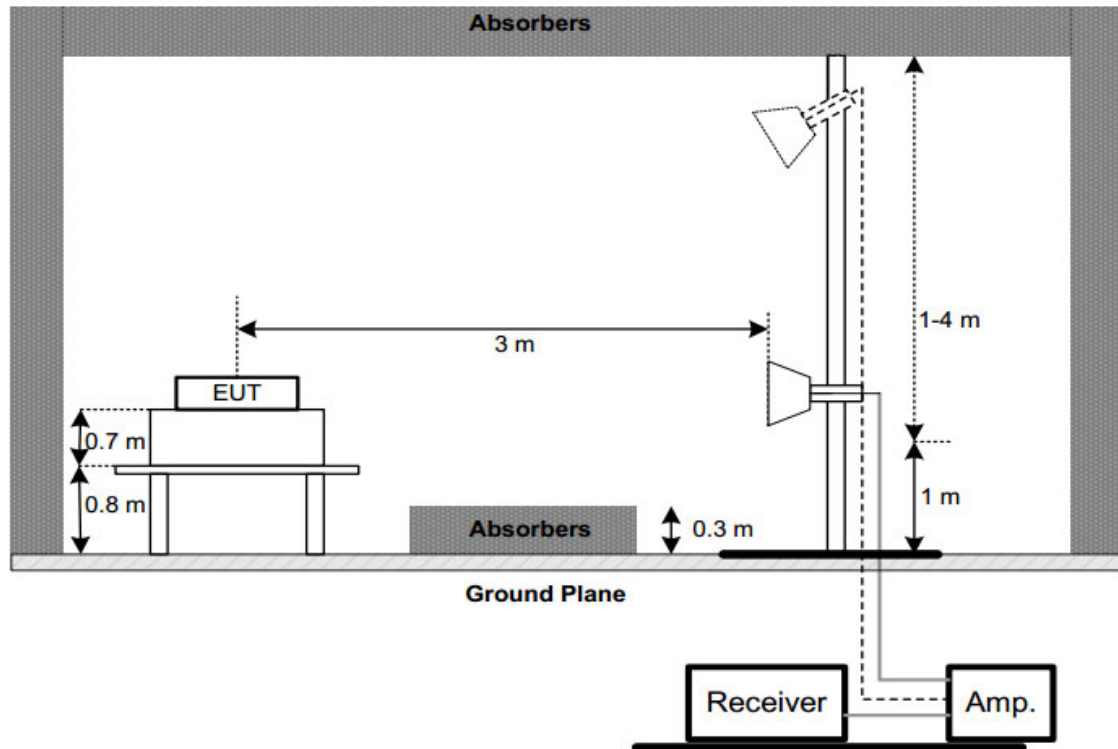

3.2.4 Test Result

1) Radiated emission: 9kHz-30MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not recorded in this report.

2) Radiated emission: 30MHz-1GHz

Note:


1. Measurement = Reading + Correct Factor.
2. Over = Measurement – Limit
3. The TX 11AX40MIMO Mode Channel 110 is found to be the worst case and recorded.

For adapter1


Below 1GHz (30MHz~1GHz)

TX 11AX40MIMO Mode Channel 110

VERTICAL

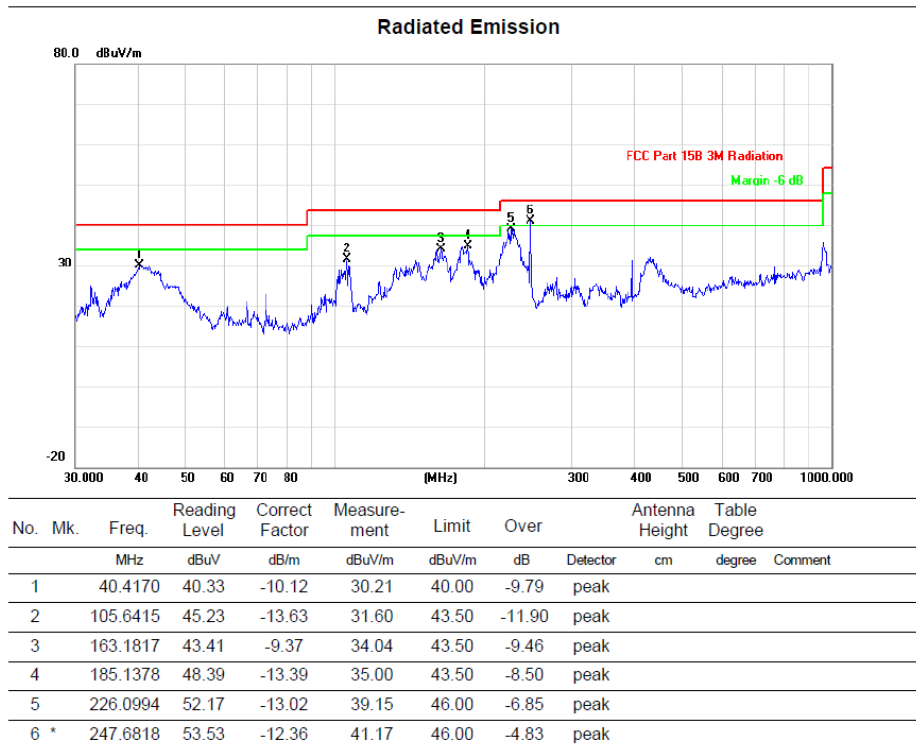


HORIZONTAL

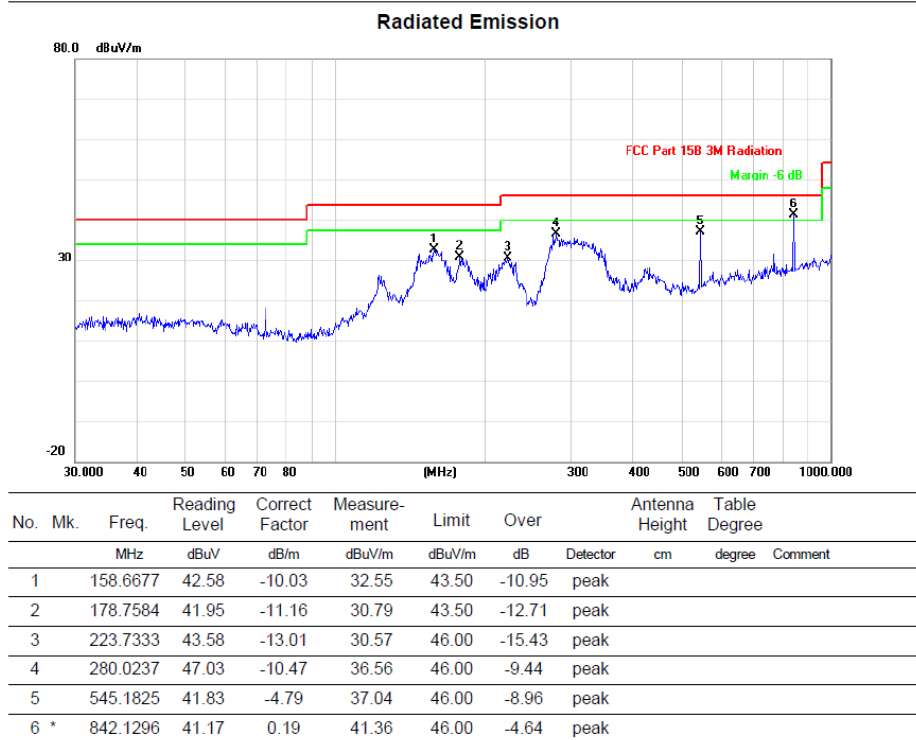

VERTICAL


Radiated Emission

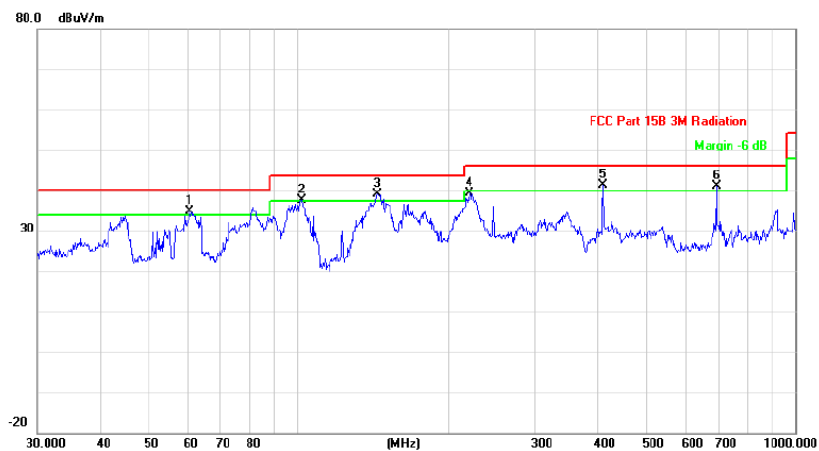

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	I	60.7043	46.67	-11.75	34.92	40.00	-5.08	peak		
2	I	101.6443	50.87	-13.21	37.66	43.50	-5.84	peak		
3	*	144.3343	49.42	-10.19	39.23	43.50	-4.27	peak		
4		221.3920	52.17	-12.78	39.39	46.00	-6.61	peak		
5	I	410.3824	48.84	-7.53	41.31	46.00	-4.69	peak		
6	I	694.4174	43.02	-1.91	41.11	46.00	-4.89	peak		

HORIZONTAL

Radiated Emission

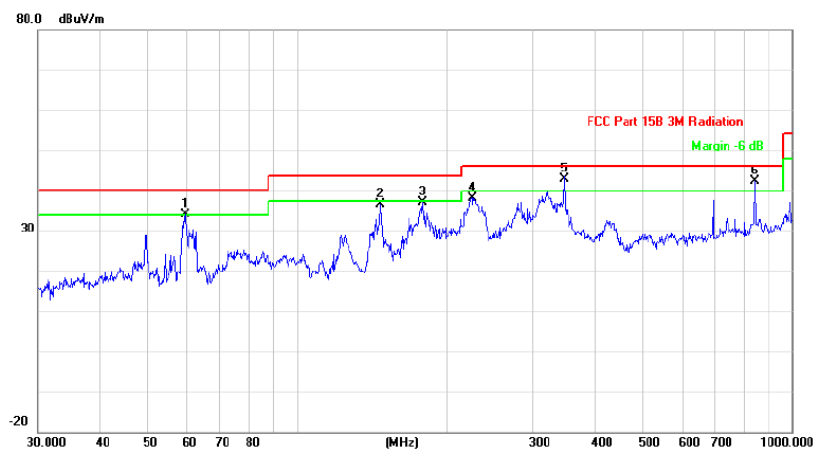

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	I	59.4405	44.99	-10.92	34.07	40.00	-5.93	peak		
2		147.4036	46.73	-10.20	36.53	43.50	-6.97	peak		
3		179.3863	48.87	-11.63	37.24	43.50	-6.26	peak		
4		226.0994	51.24	-13.02	38.22	46.00	-7.78	peak		
5	*	346.8091	51.78	-8.78	43.00	46.00	-3.00	QP		
6	I	842.1295	42.23	0.19	42.42	46.00	-3.58	peak		



3) Radiated emission: Above 1GHz

Note:

1. Measurement = Reading + Correct Factor.
2. Over = Measurement – Limit


Above 1GHz (1GHz~18GHz)	Test mode:11A-CDD	Test Channel:36
-------------------------	-------------------	-----------------

VERTICAL

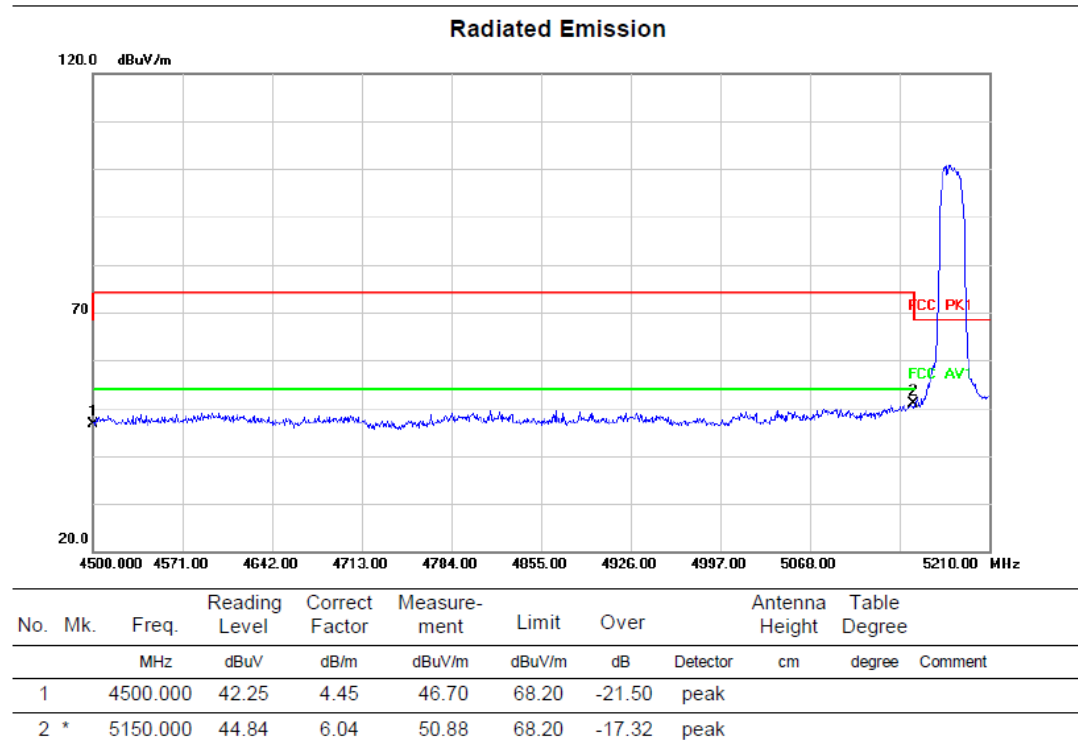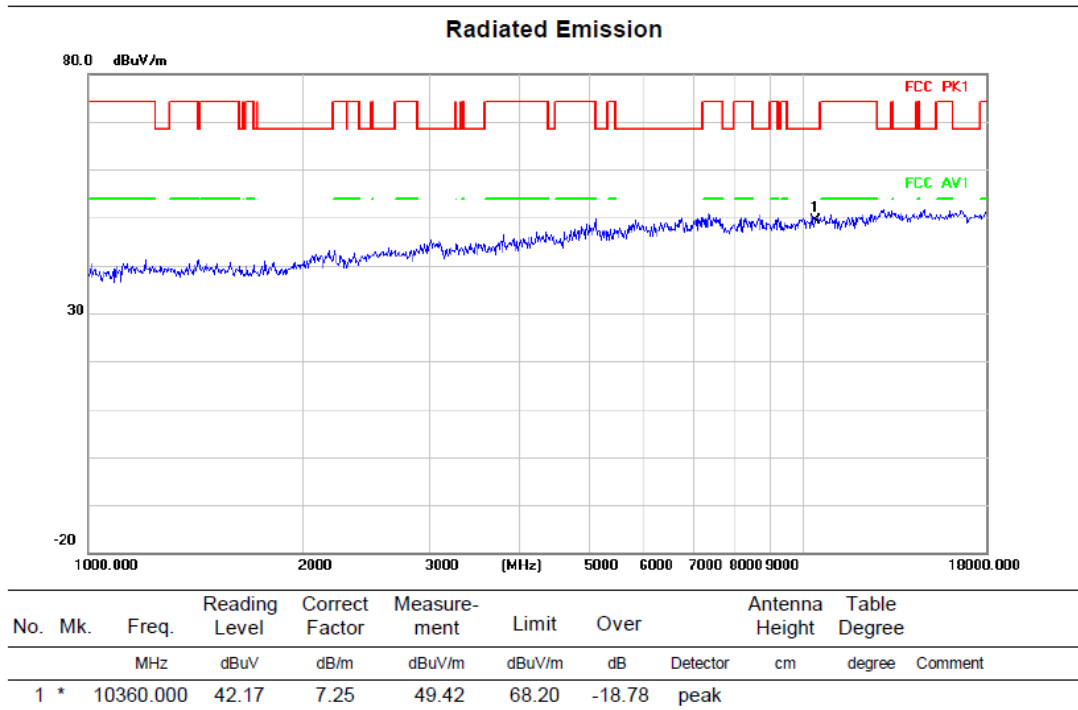


HORIZONTAL

Radiated Emission

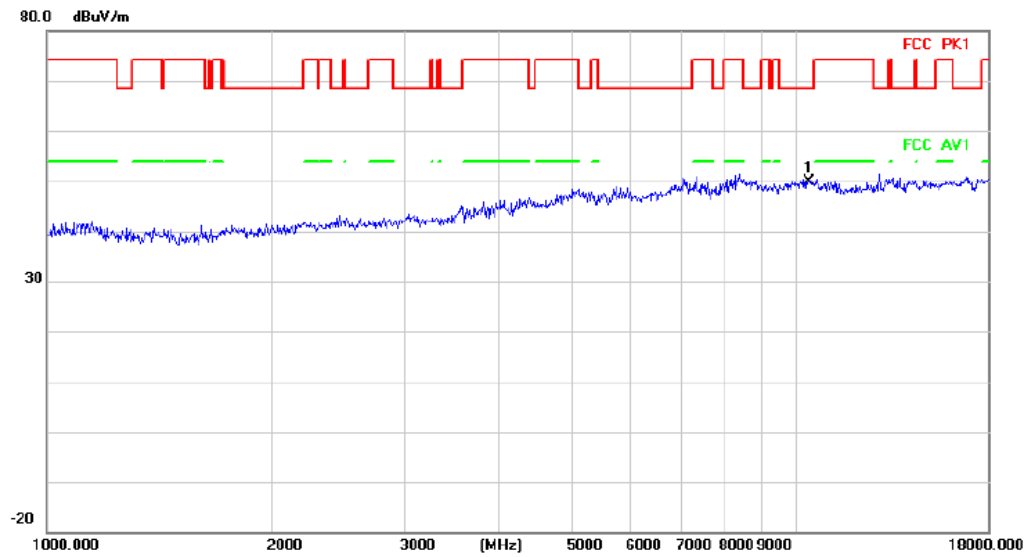

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10360.000	42.54	7.25	49.79	68.20	-18.41	peak		


Radiated Emission

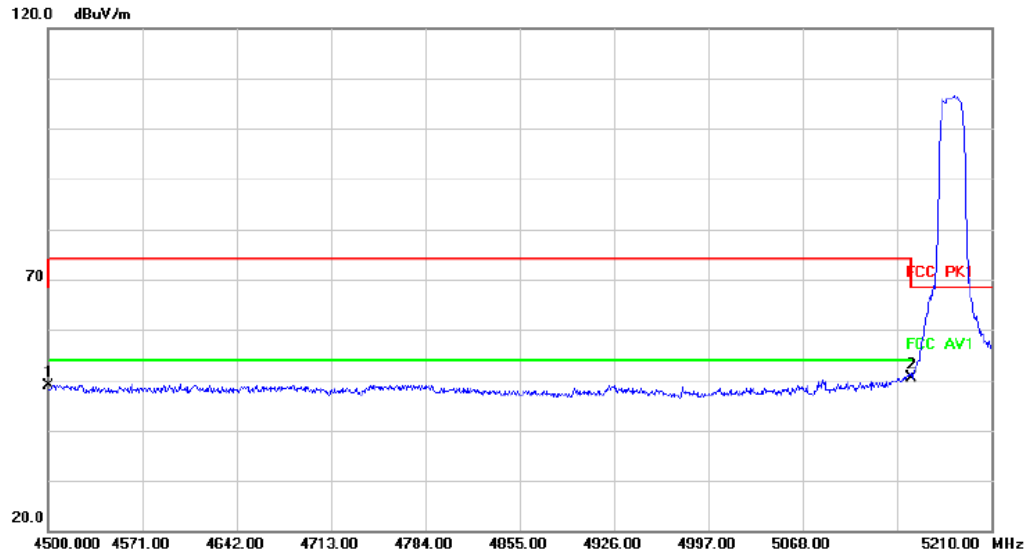

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4500.000	44.36	4.45	48.81	68.20	-19.39	peak		
2	*	5150.000	44.46	6.04	50.50	68.20	-17.70	peak		

VERTICAL


Radiated Emission

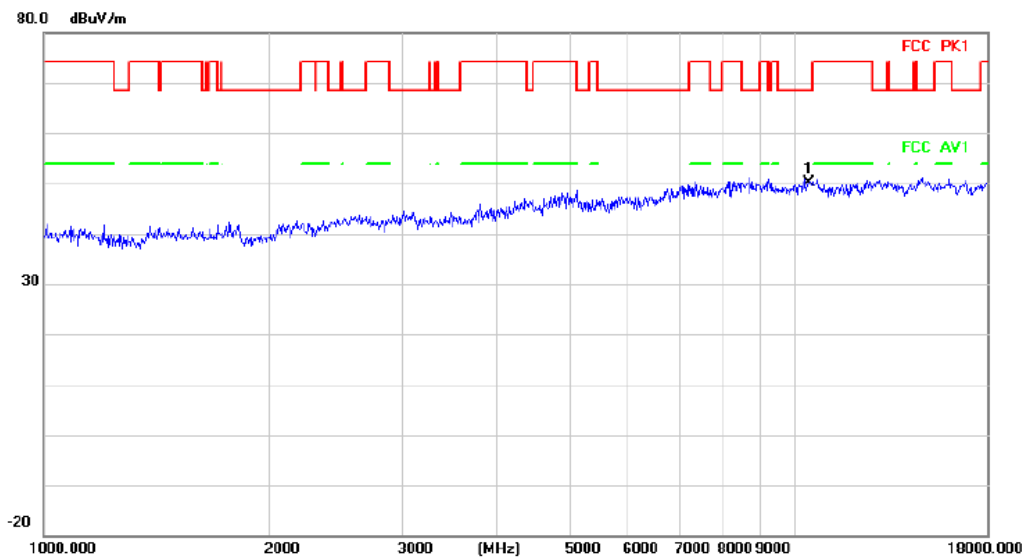

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	10400.000	42.63	7.39	50.02	68.20	-18.18	peak	

HORIZONTAL


Radiated Emission

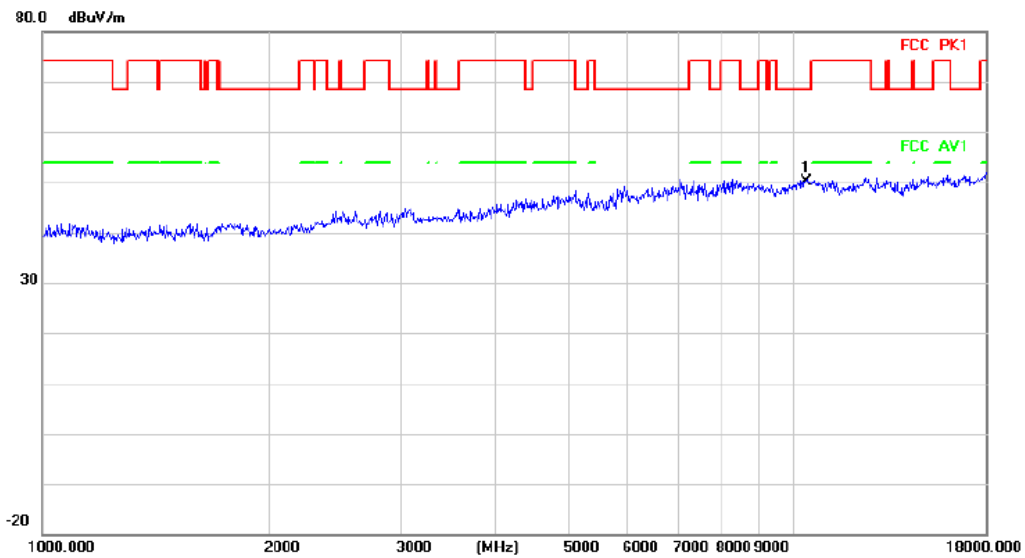

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	10400.000	42.82	7.39	50.21	68.20	-17.99	peak	

VERTICAL


Radiated Emission

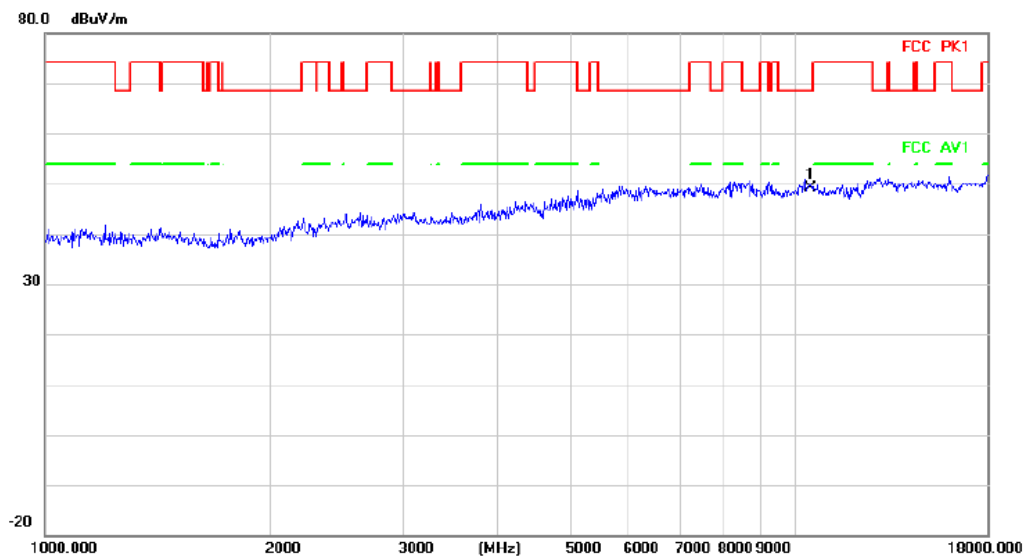

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10480.000	41.50	7.60	49.10	68.20	-19.10	peak		Comment

HORIZONTAL


Radiated Emission

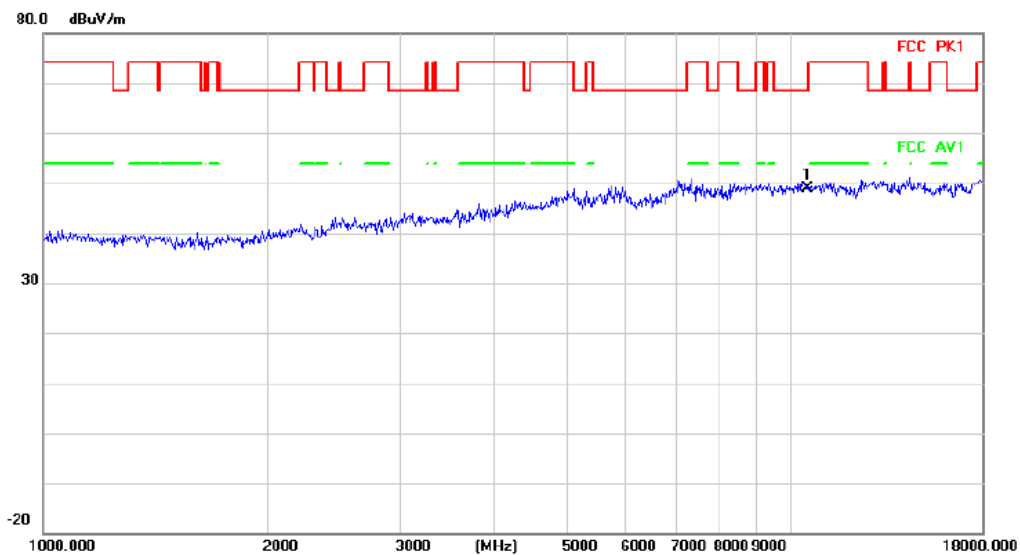

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10480.000	41.34	7.60	48.94	68.20	-19.26	peak		Comment

VERTICAL


Radiated Emission

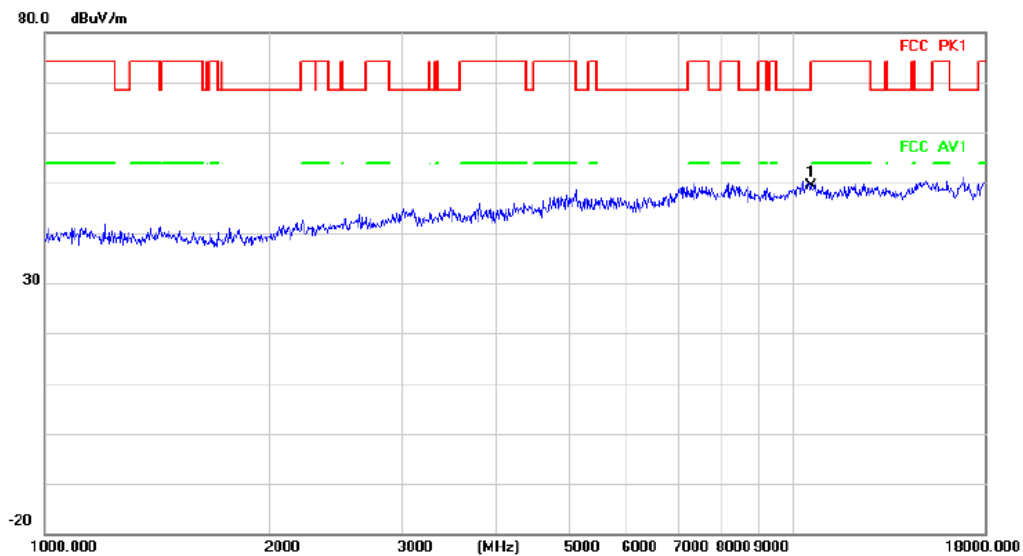

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10520.000	41.64	7.71	49.35	68.20	-18.85	peak		Comment

HORIZONTAL


Radiated Emission

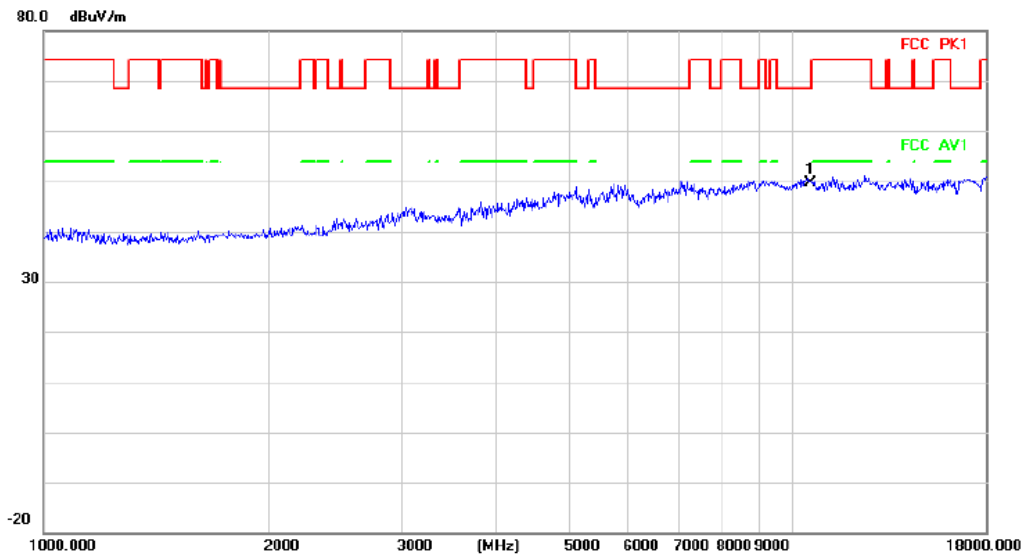

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10520.000	42.01	7.71	49.72	68.20	-18.48	peak		Comment

VERTICAL


Radiated Emission

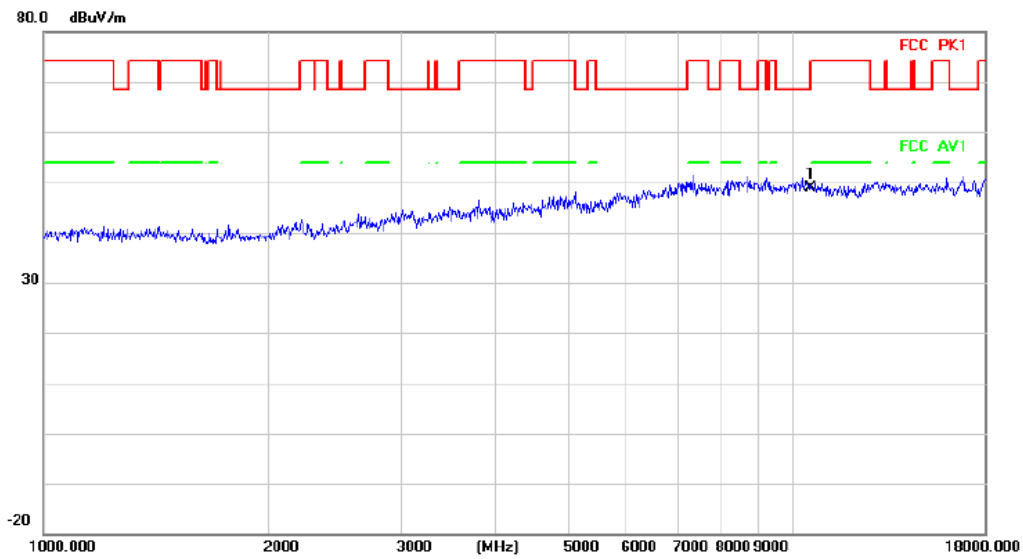

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10560.000	41.13	7.81	48.94	68.20	-19.26	peak		Comment

HORIZONTAL


Radiated Emission

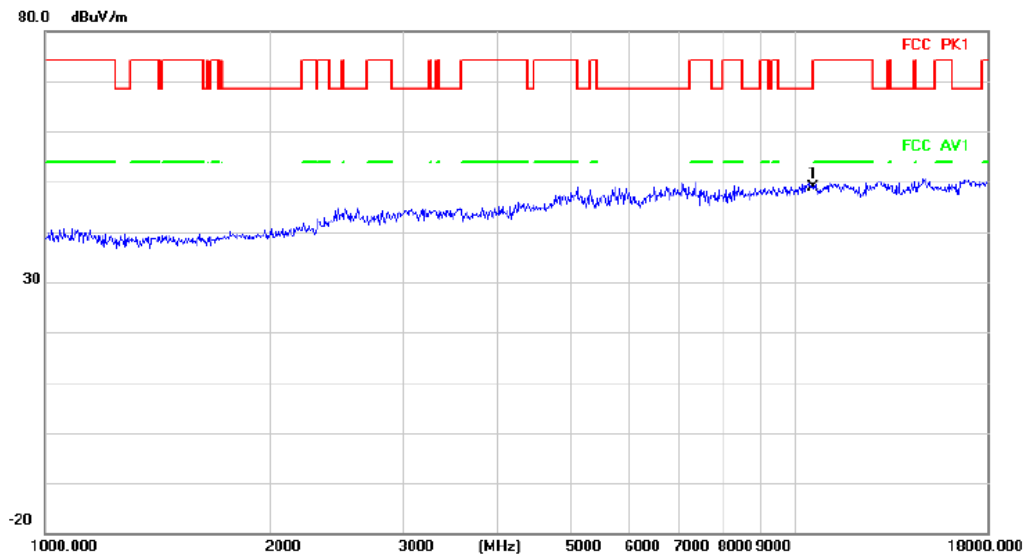

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10560.000	41.02	7.81	48.83	68.20	-19.37	peak		Comment


VERTICAL

Radiated Emission

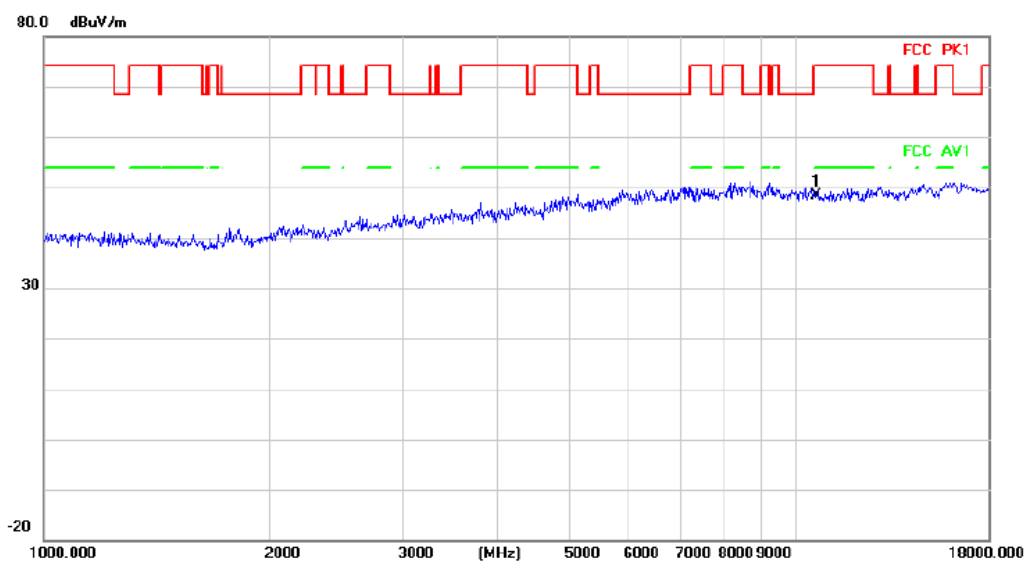

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10640.000	40.51	7.87	48.38	74.00	-25.62	peak		


Radiated Emission

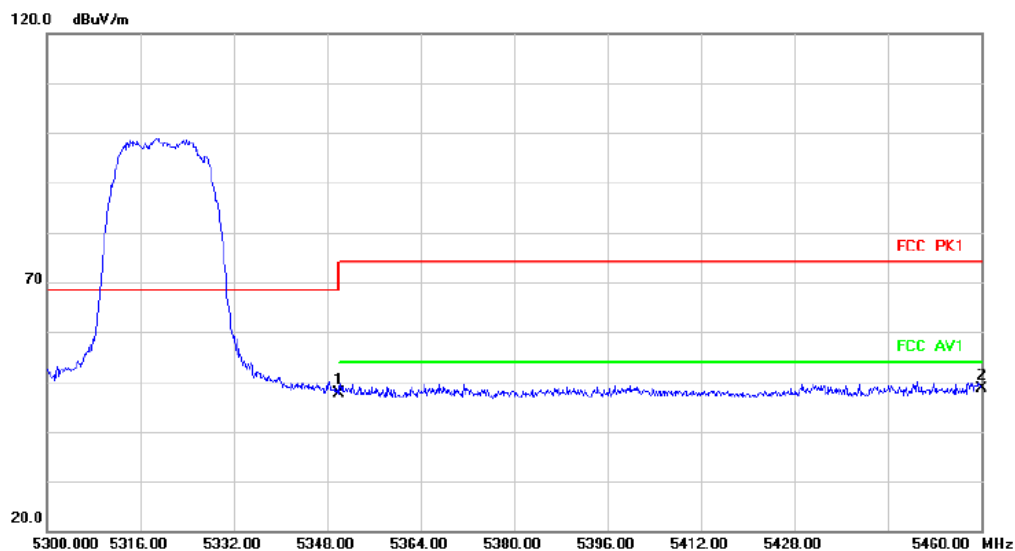

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5350.000	42.49	5.25	47.74	68.20	-20.46	peak		
2	*	5460.000	43.67	5.03	48.70	68.20	-19.50	peak		


HORIZONTAL

Radiated Emission

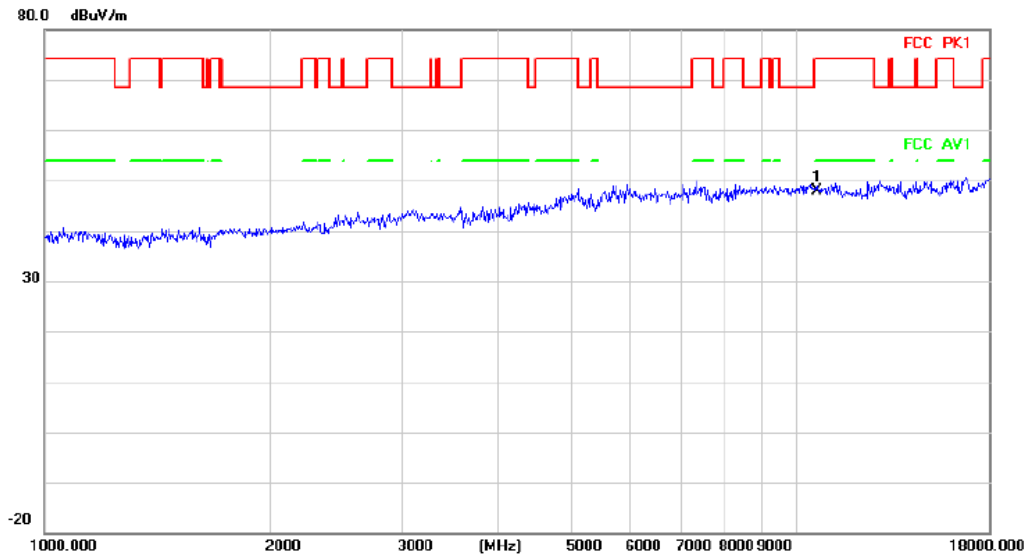

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	10640.000	40.11	7.87	47.98	74.00	-26.02	peak	


Radiated Emission

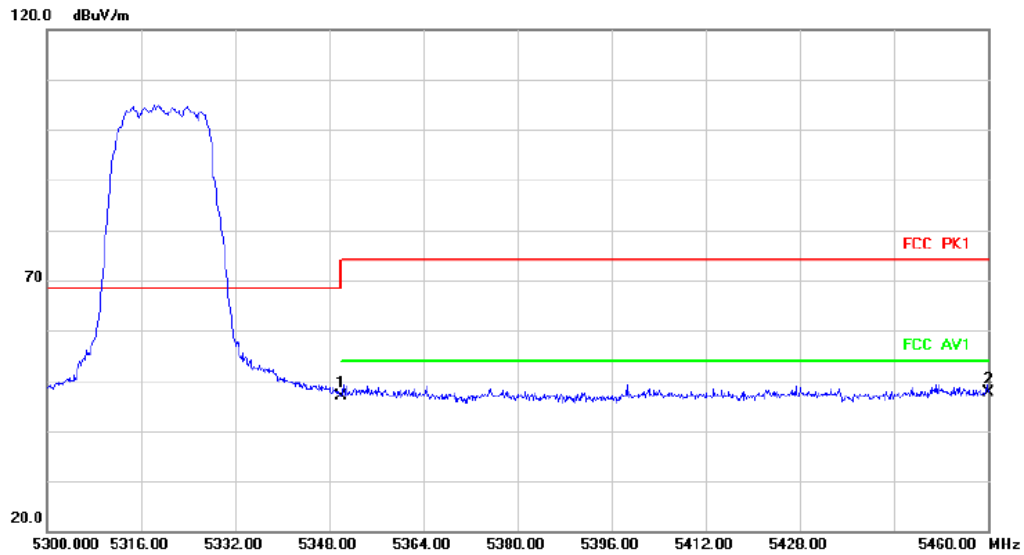

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		5350.000	41.69	5.25	46.94	68.20	-21.26	peak	
2	*	5460.000	42.56	5.03	47.59	68.20	-20.61	peak	


VERTICAL

Radiated Emission

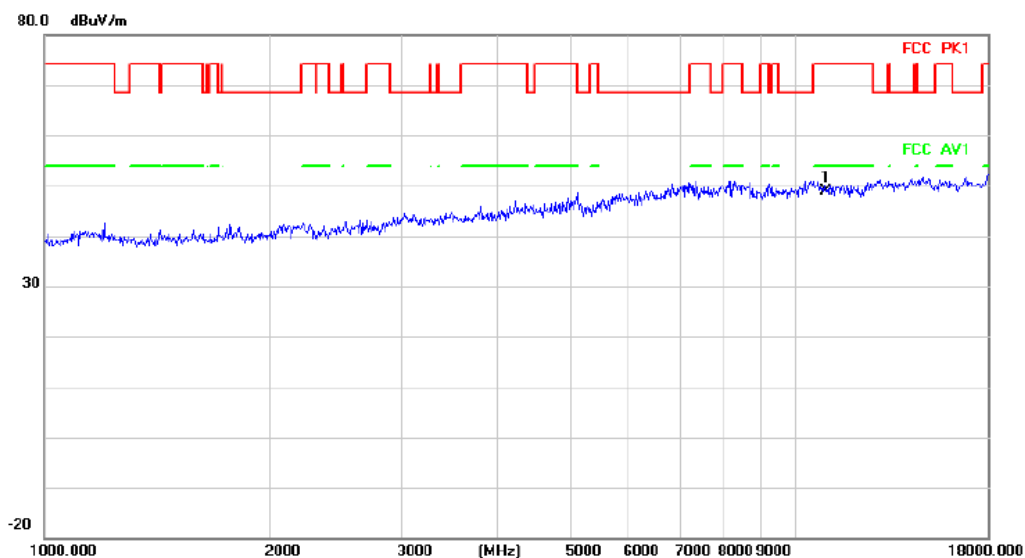

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11000.000	41.45	7.38	48.83	74.00	-25.17	peak		Comment


Radiated Emission

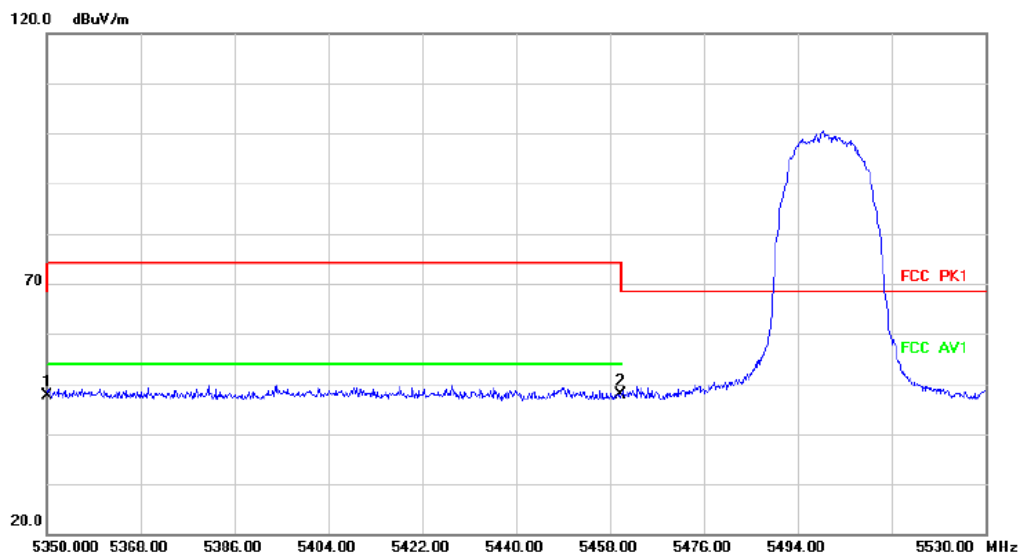


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5350.000	42.38	5.25	47.63	68.20	-20.57	peak		Comment
2	*	5460.000	42.88	5.03	47.91	68.20	-20.29	peak		Comment

HORIZONTAL

Radiated Emission

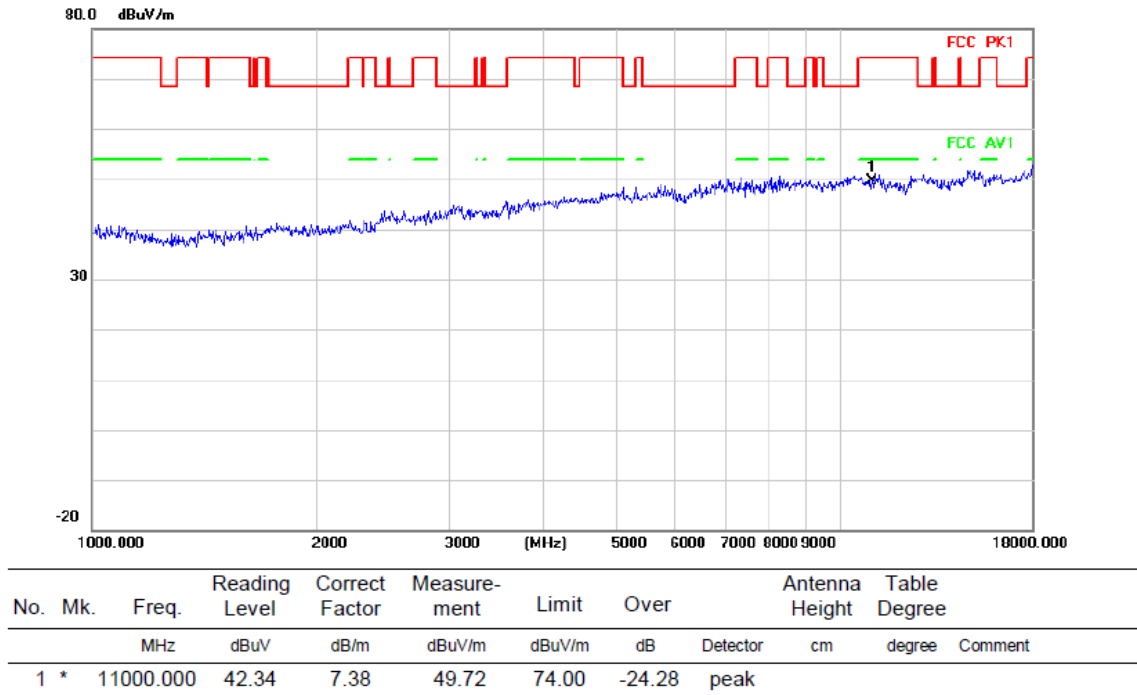


Radiated Emission

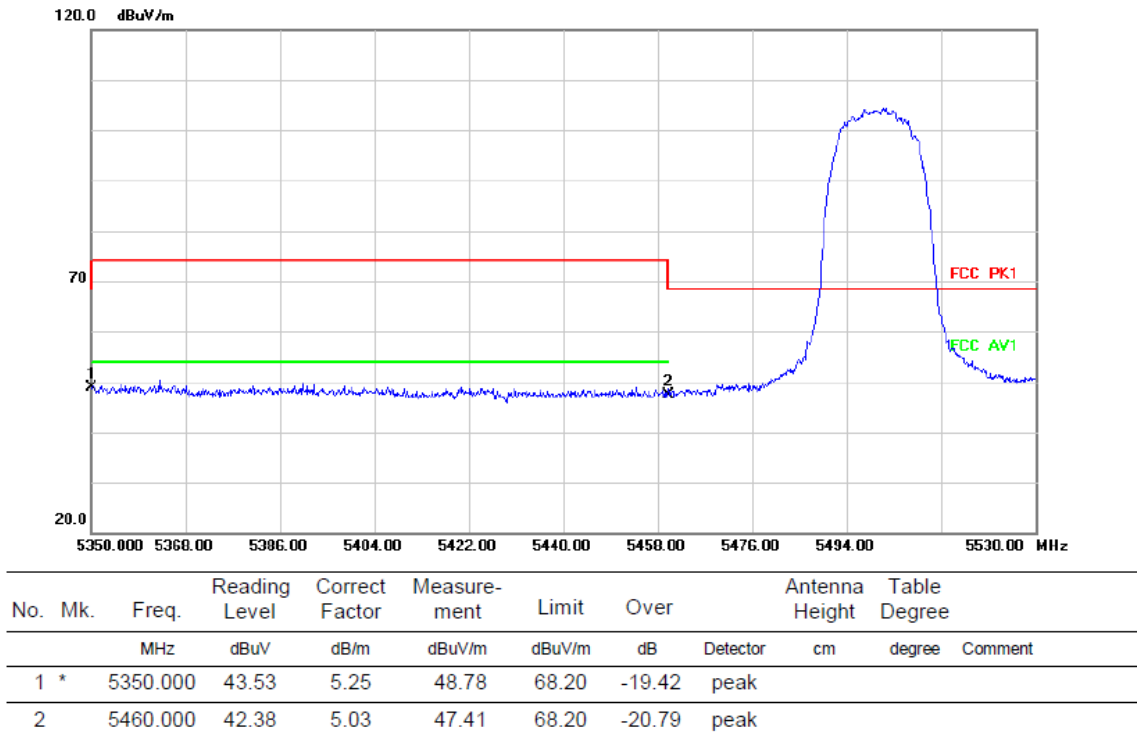

VERTICAL


Radiated Emission

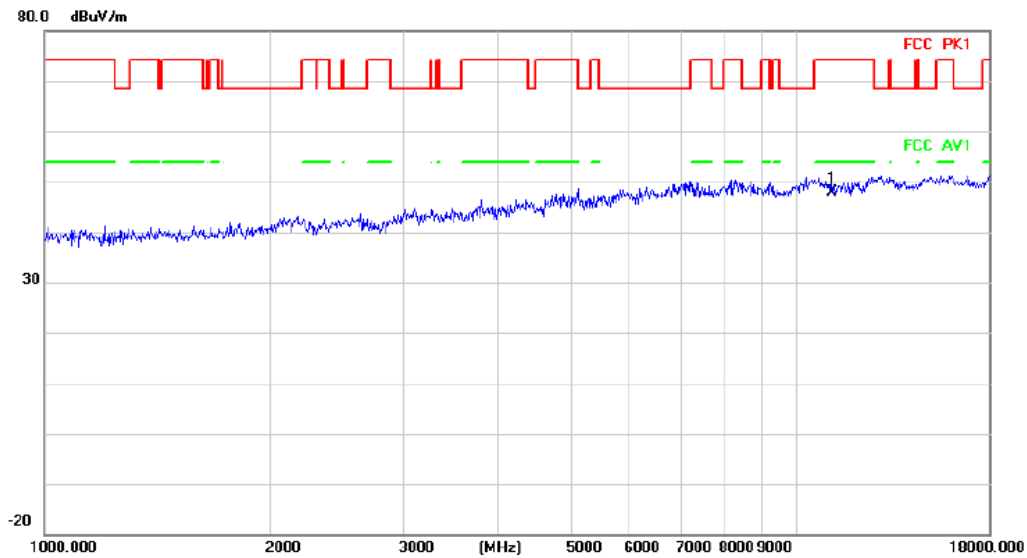

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11160.000	40.44	7.54	47.98	74.00	-26.02	peak		Comment

HORIZONTAL


Radiated Emission

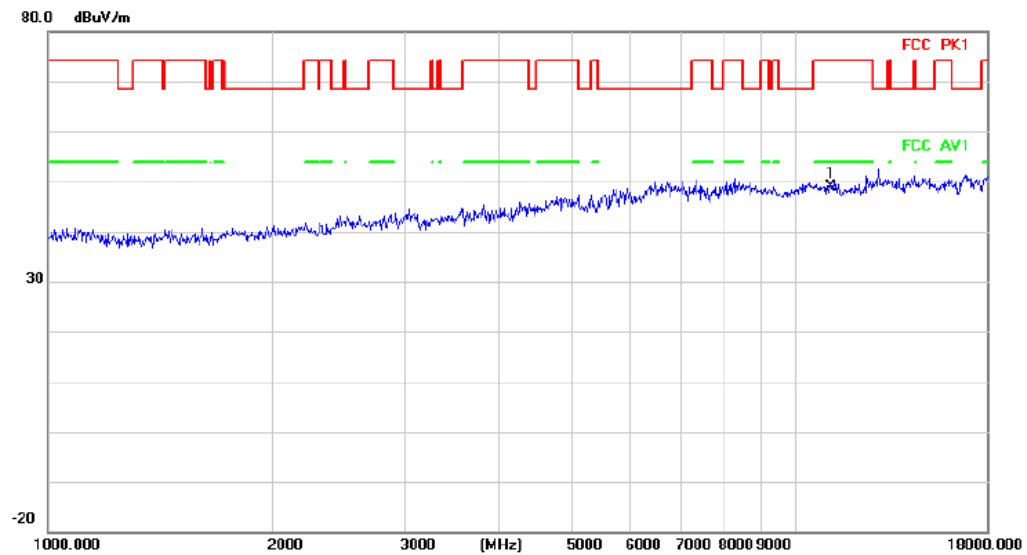

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11160.000	41.23	7.54	48.77	74.00	-25.23	peak		Comment

VERTICAL


Radiated Emission

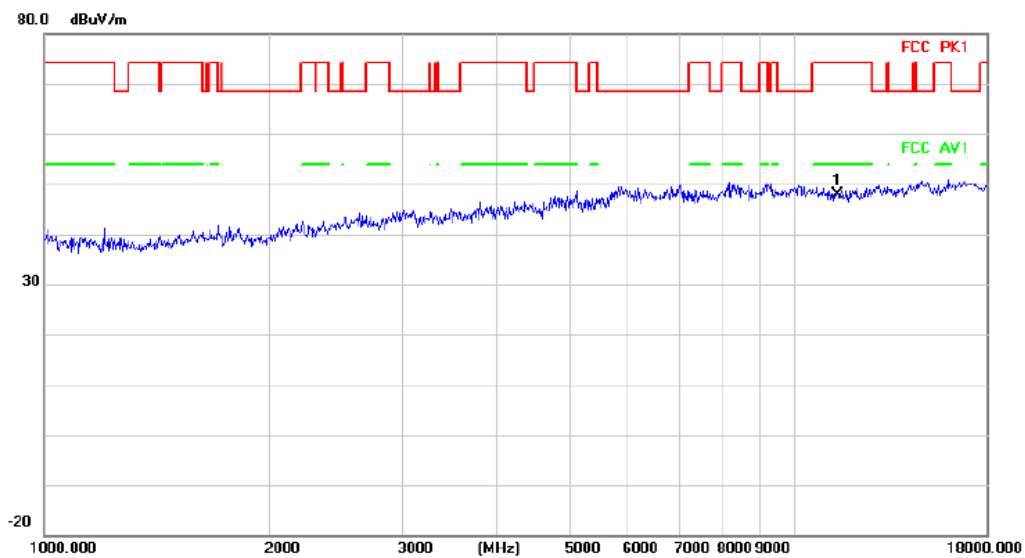

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11400.000	40.26	7.54	47.80	74.00	-26.20	peak		Comment

HORIZONTAL


Radiated Emission

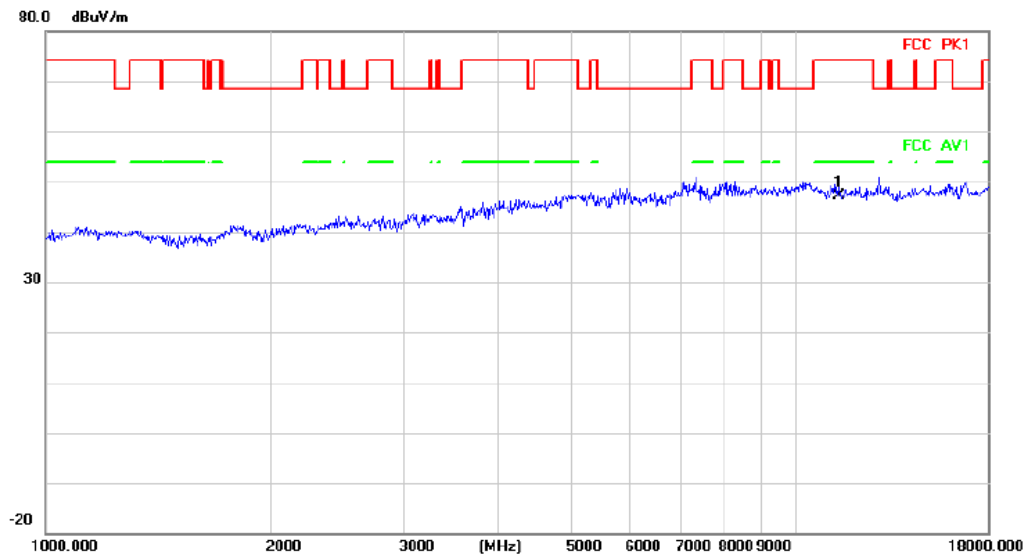

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11400.000	39.52	7.54	47.06	74.00	-26.94	peak		Comment


VERTICAL

Radiated Emission

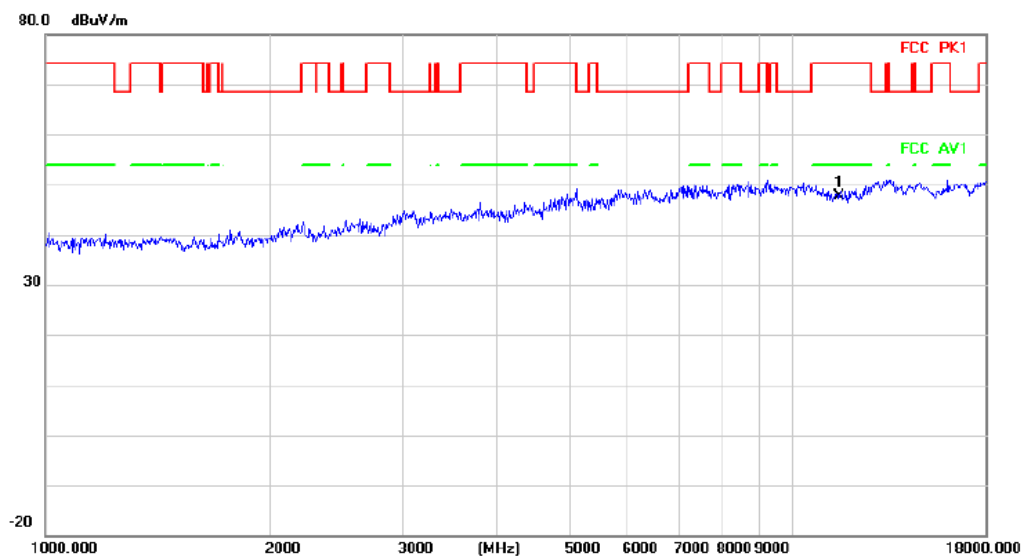

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11490.000	39.86	7.76	47.62	74.00	-26.38	peak		Comment


Radiated Emission

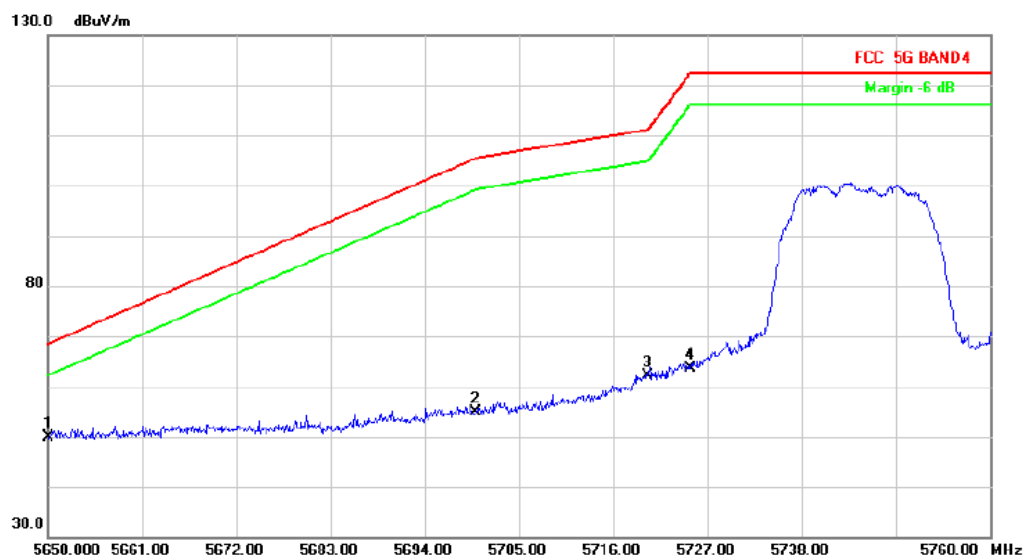

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5650.000	44.23	5.72	49.95	68.20	-18.25	peak		Comment
2		5700.000	48.79	6.00	54.79	105.20	-50.41	peak		
3		5720.000	56.27	5.82	62.09	110.80	-48.71	peak		
4		5725.000	57.76	5.78	63.54	122.20	-58.66	peak		


HORIZONTAL

Radiated Emission

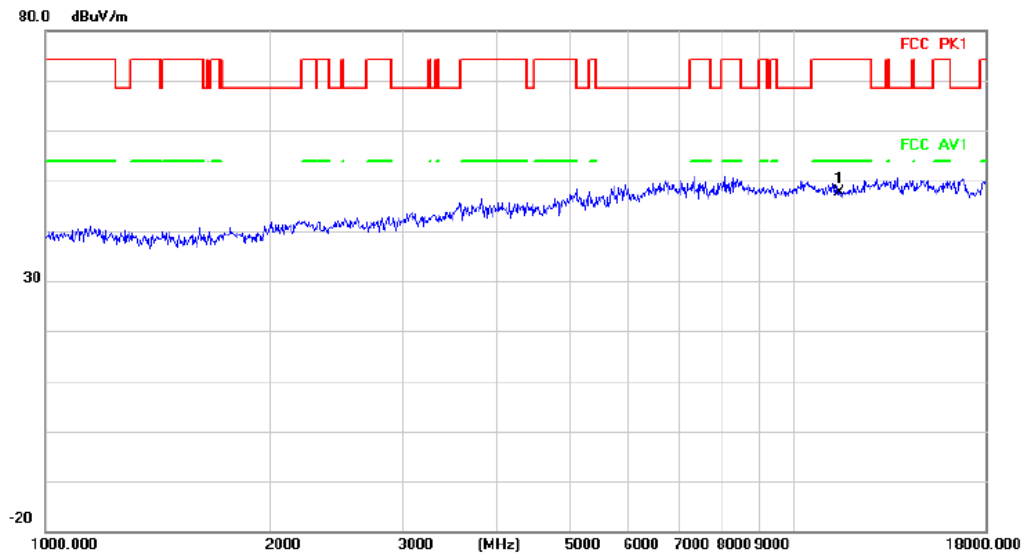

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11490.000	39.78	7.76	47.54	74.00	-26.46	peak	


Radiated Emission

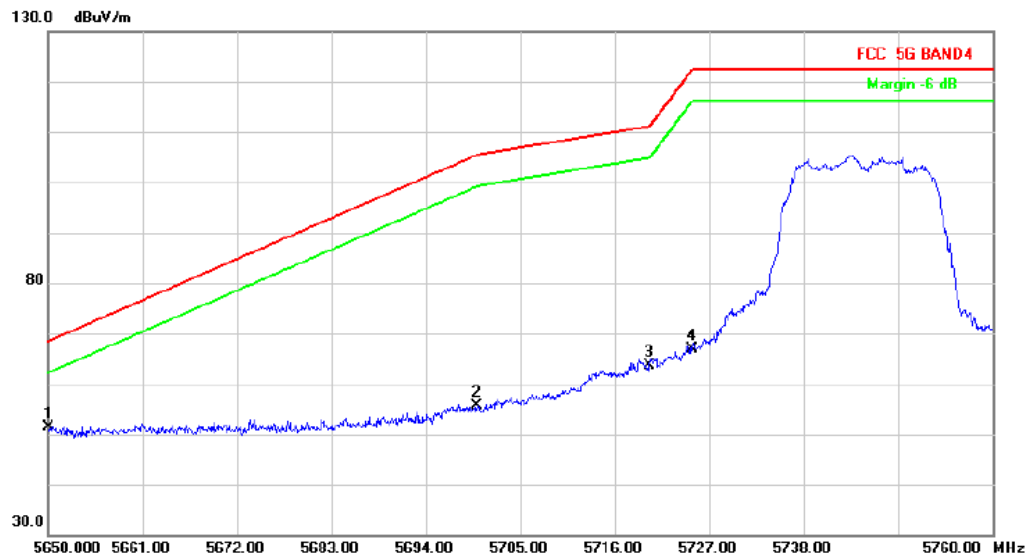

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	5650.000	45.54	5.72	51.26	68.20	-16.94	peak	
2		5700.000	49.52	6.00	55.52	105.20	-49.68	peak	
3		5720.000	57.78	5.82	63.60	110.80	-47.20	peak	
4		5725.000	61.11	5.78	66.89	122.20	-55.31	peak	

VERTICAL


Radiated Emission

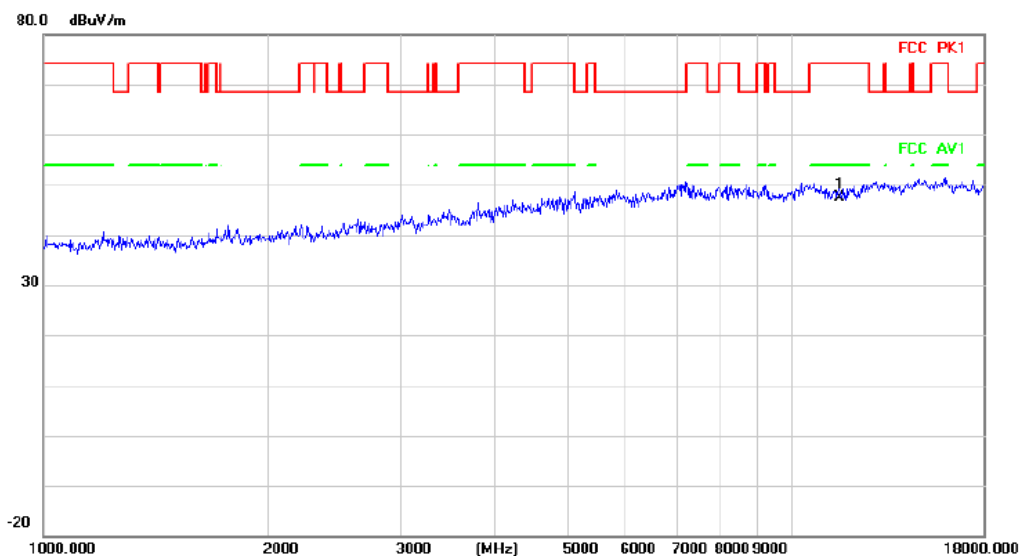

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11570.000	39.87	7.60	47.47	74.00	-26.53	peak		Comment

HORIZONTAL


Radiated Emission

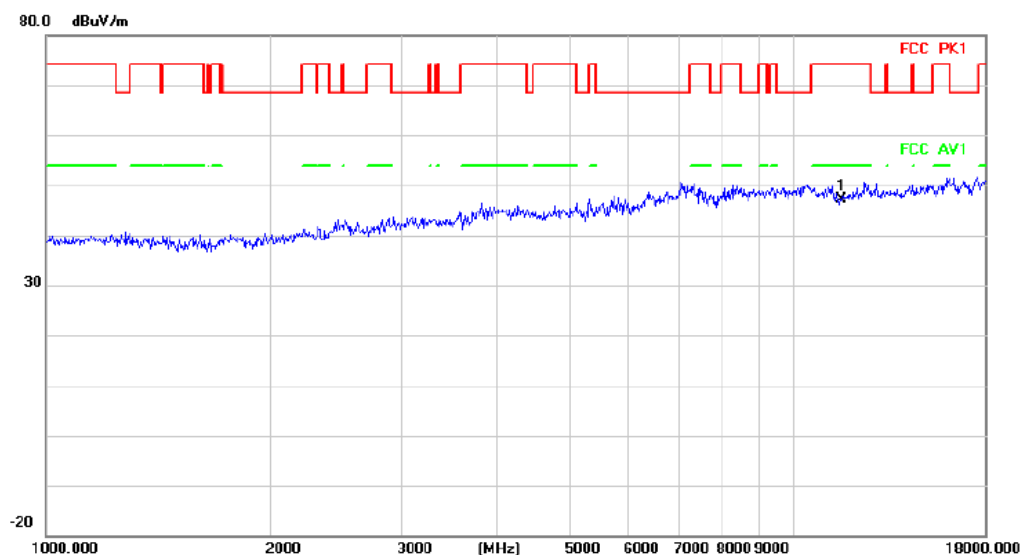

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11570.000	39.63	7.60	47.23	74.00	-26.77	peak		Comment


VERTICAL

Radiated Emission

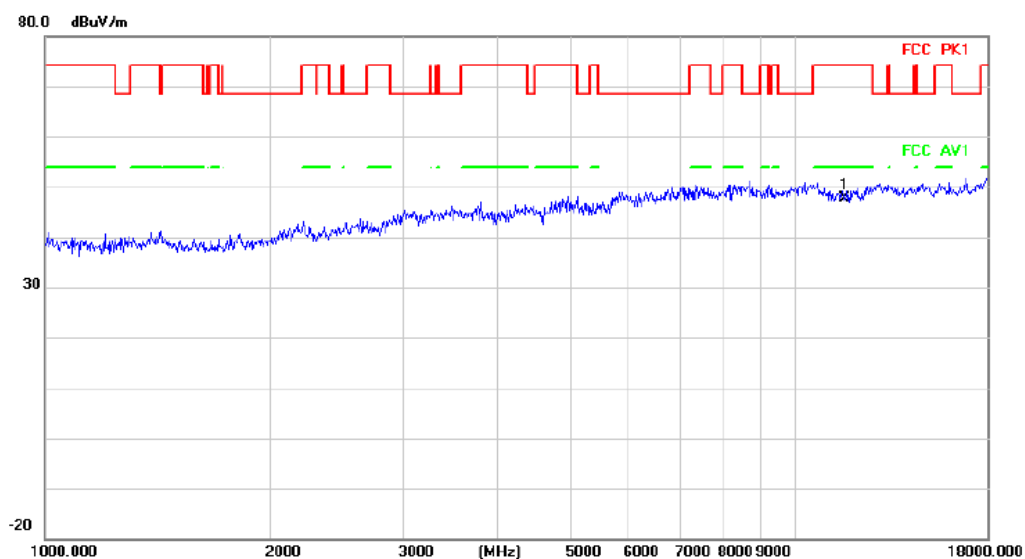

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11650.000	40.28	7.45	47.73	74.00	-26.27	peak		


Radiated Emission

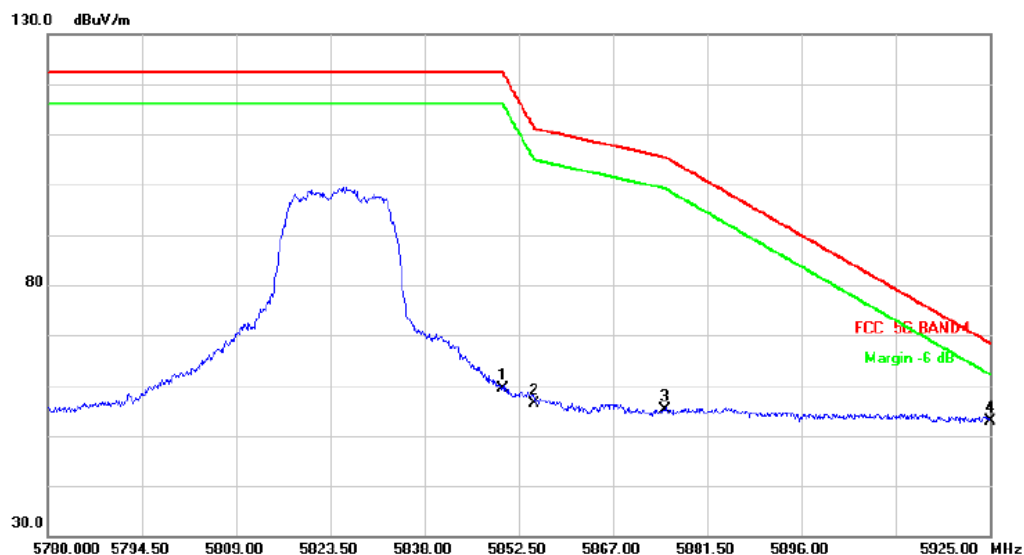

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.000	52.68	6.79	59.47	122.20	-62.73	peak		
2		5855.000	49.78	6.72	56.50	110.80	-54.30	peak		
3		5875.000	48.65	6.46	55.11	105.20	-50.09	peak		
4	*	5925.000	46.41	6.46	52.87	68.20	-15.33	peak		


HORIZONTAL

Radiated Emission

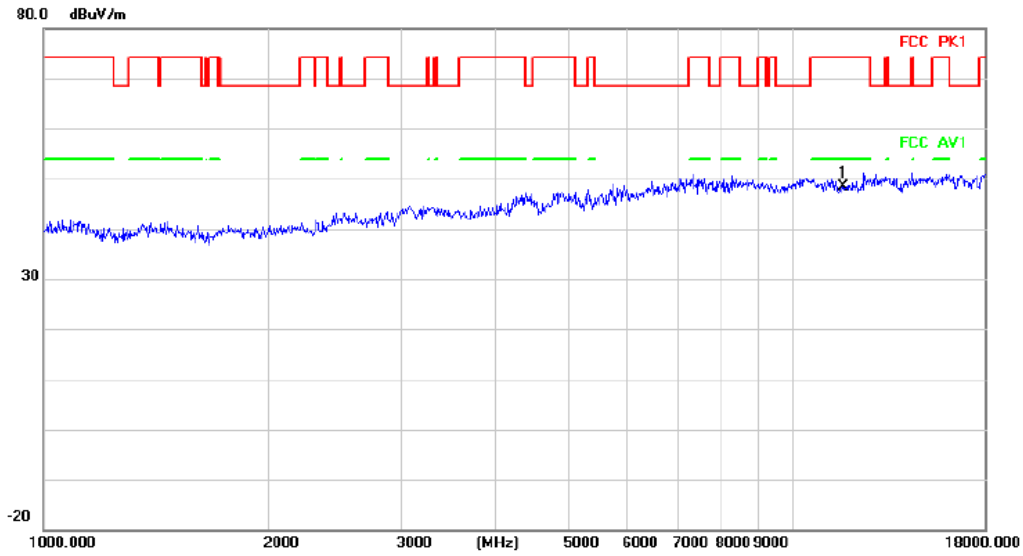

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11650.000	41.03	7.45	48.48	74.00	-25.52	peak	


Radiated Emission

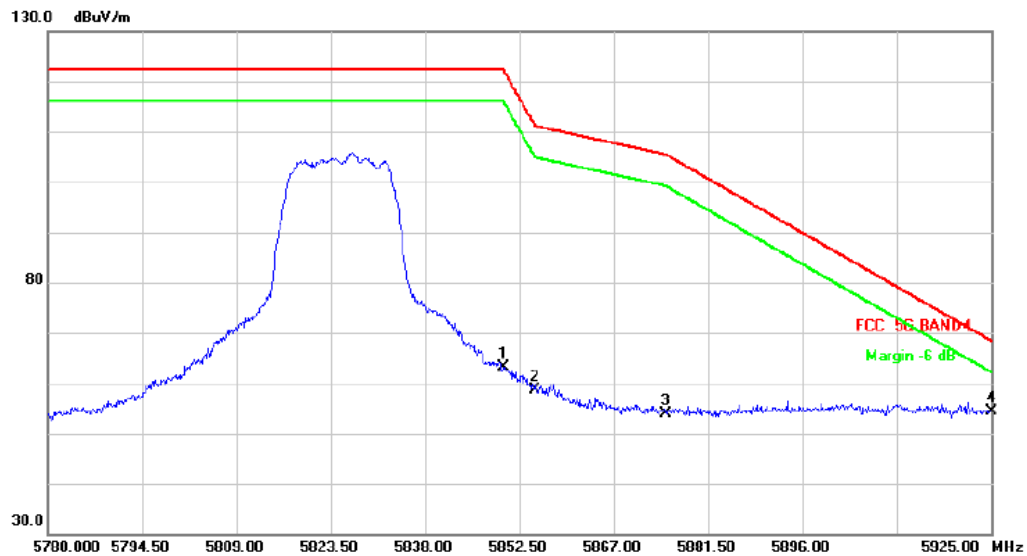

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		5850.000	56.36	6.79	63.15	122.20	-59.05	peak	
2		5855.000	51.81	6.72	58.53	110.80	-52.27	peak	
3		5875.000	47.42	6.46	53.88	105.20	-51.32	peak	
4	*	5925.000	47.89	6.46	54.35	68.20	-13.85	peak	


VERTICAL

Radiated Emission

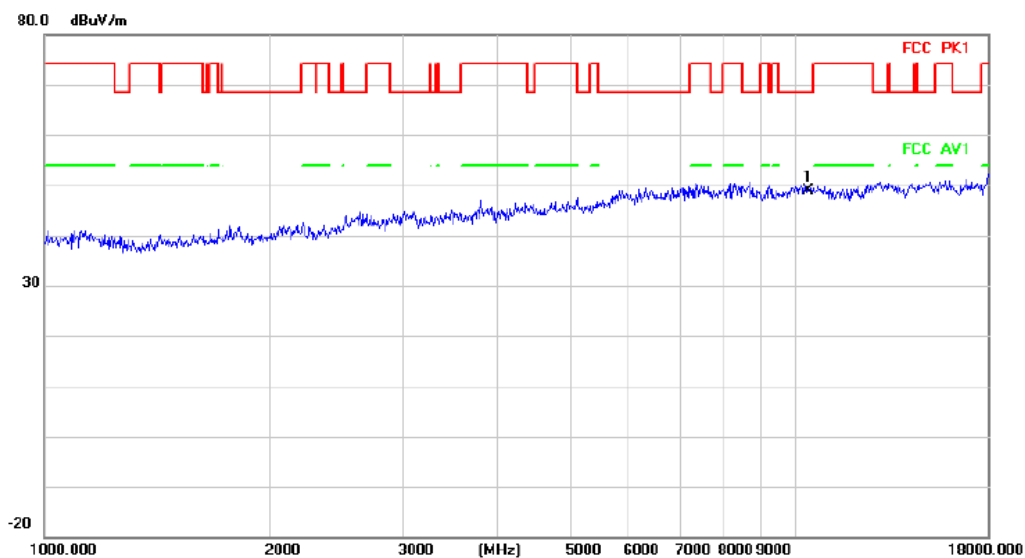

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10360.000	41.67	7.25	48.92	68.20	-19.28	peak		Comment


Radiated Emission

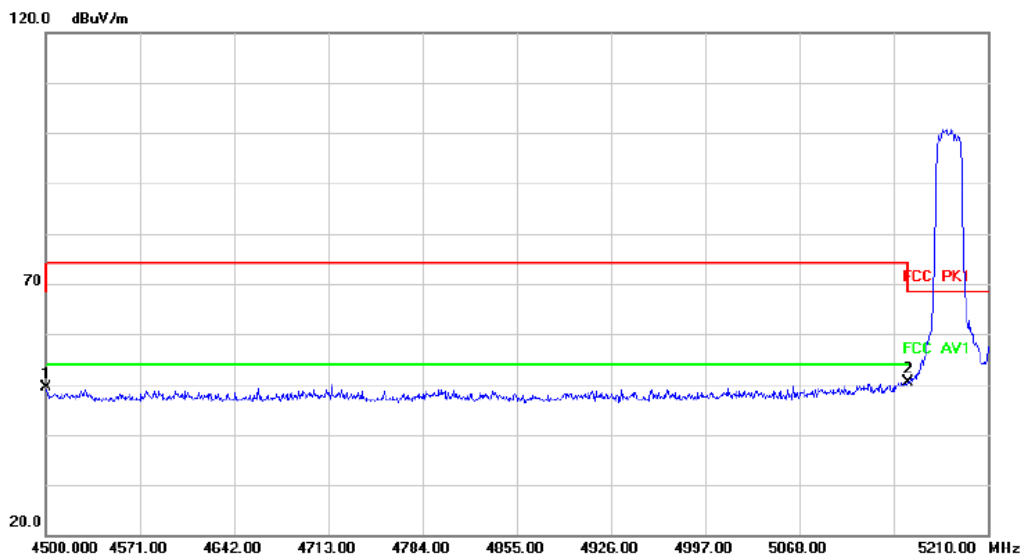

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4500.000	44.84	4.45	49.29	68.20	-18.91	peak		Comment
2	*	5150.000	44.29	6.04	50.33	68.20	-17.87	peak		Comment


HORIZONTAL

Radiated Emission

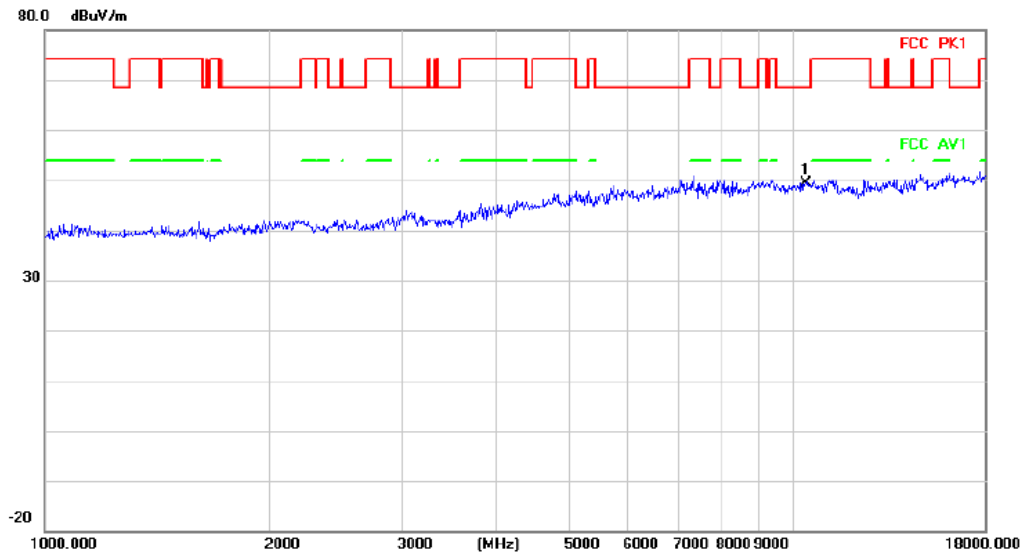

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10360.000	42.04	7.25	49.29	68.20	-18.91	peak		


Radiated Emission

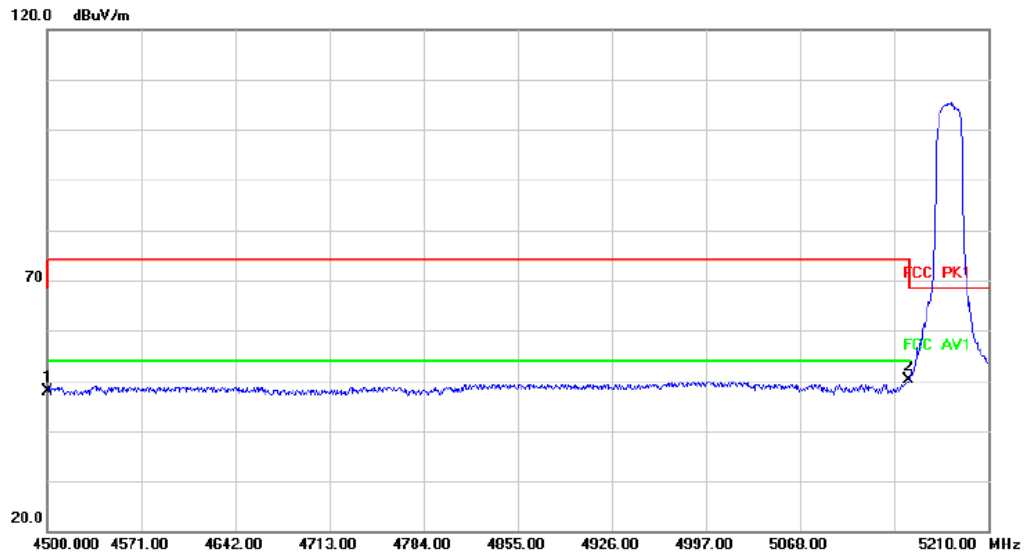

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4500.000	43.48	4.45	47.93	68.20	-20.27	peak		
2	*	5150.000	44.03	6.04	50.07	68.20	-18.13	peak		

VERTICAL


Radiated Emission

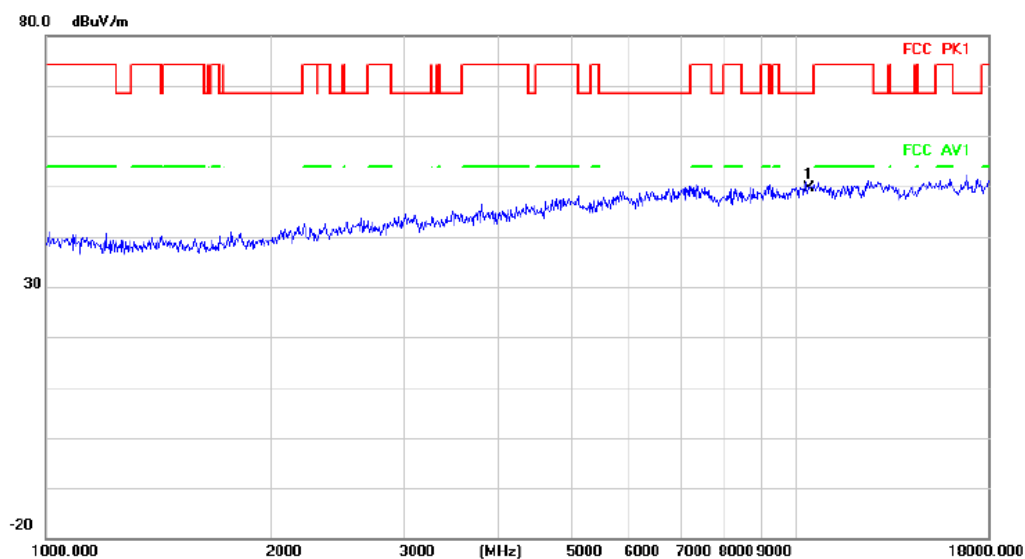

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10400.000	42.13	7.39	49.52	68.20	-18.68	peak		Comment

HORIZONTAL


Radiated Emission

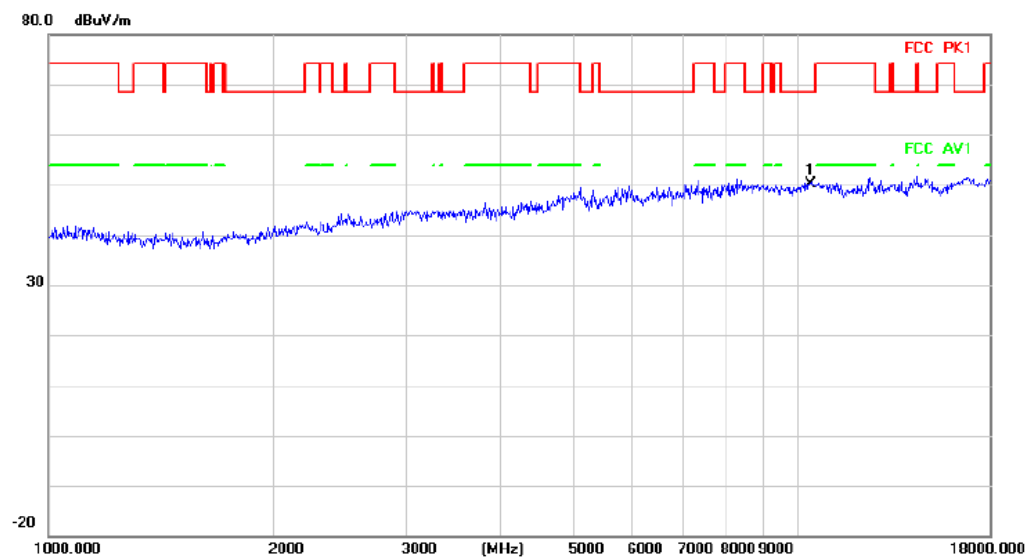

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10400.000	42.82	7.39	50.21	68.20	-17.99	peak		Comment

VERTICAL


Radiated Emission

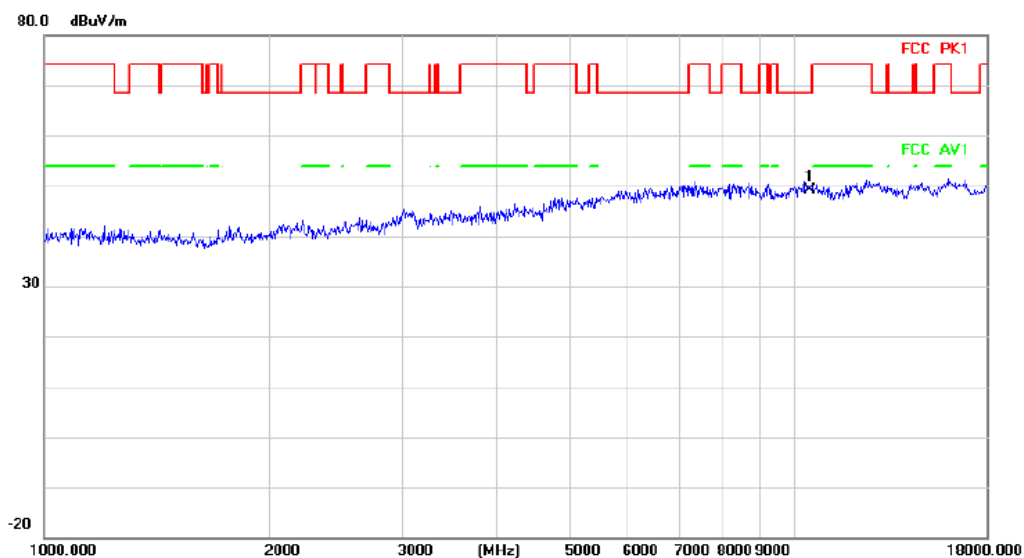

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10480.000	41.50	7.60	49.10	68.20	-19.10	peak		Comment

HORIZONTAL


Radiated Emission

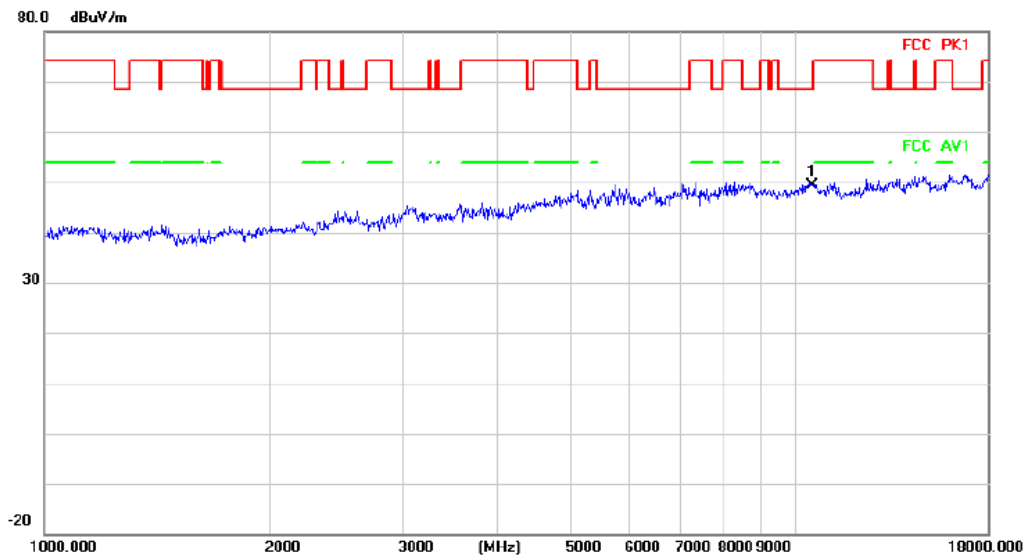

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10480.000	41.84	7.60	49.44	68.20	-18.76	peak		Comment

VERTICAL


Radiated Emission

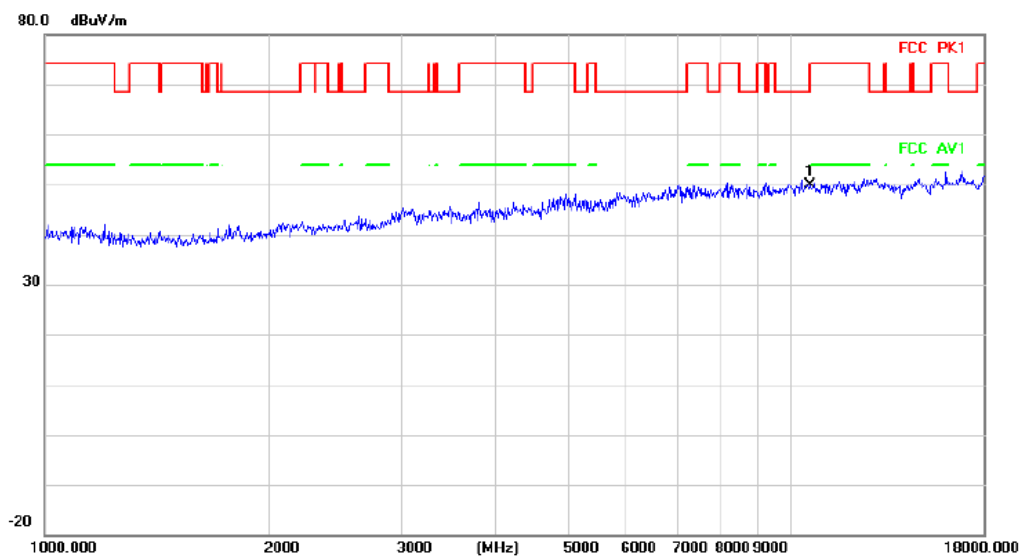

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10520.000	42.14	7.71	49.85	68.20	-18.35	peak		Comment

HORIZONTAL


Radiated Emission

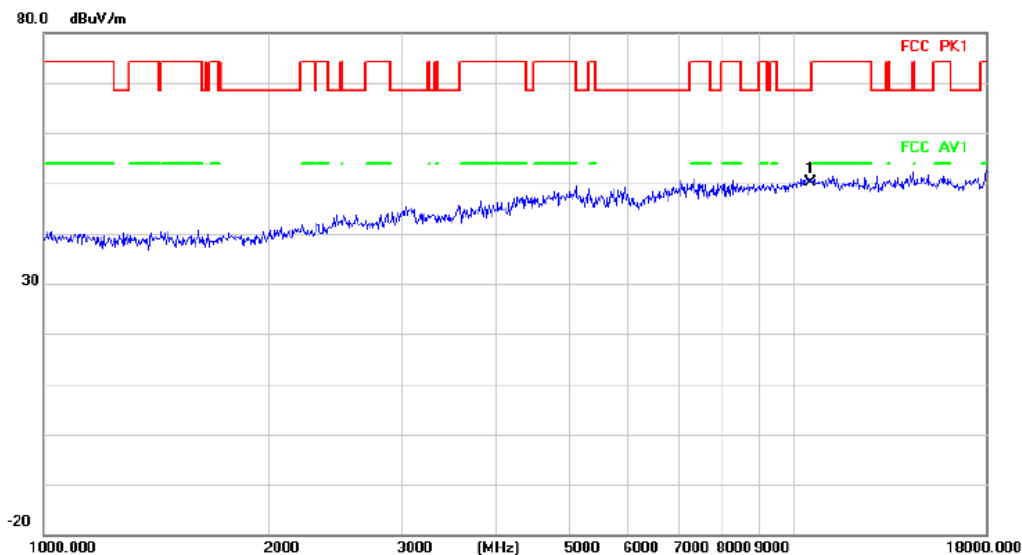

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10520.000	42.51	7.71	50.22	68.20	-17.98	peak		Comment

VERTICAL


Radiated Emission

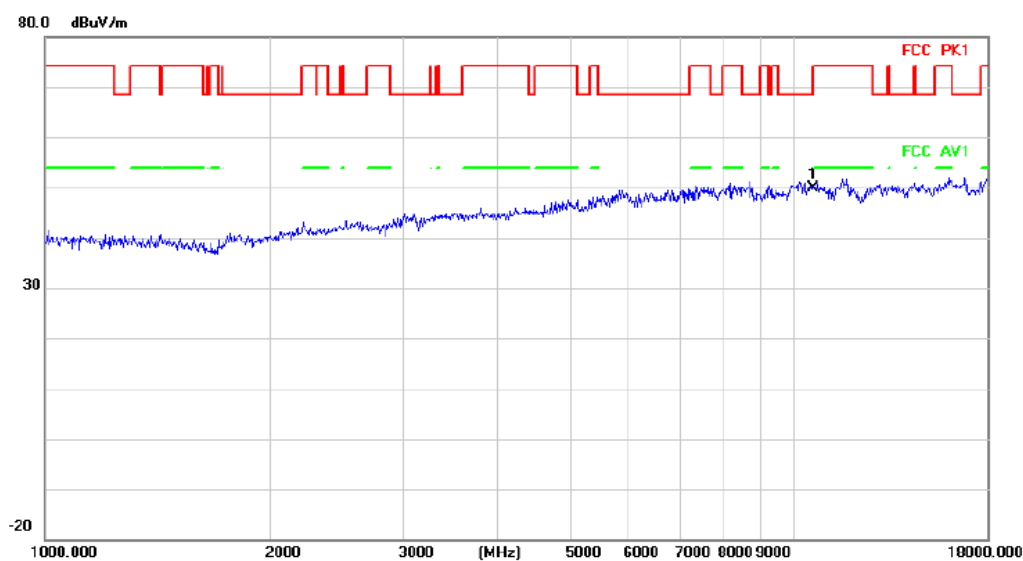

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10560.000	42.13	7.81	49.94	68.20	-18.26	peak		Comment

HORIZONTAL


Radiated Emission

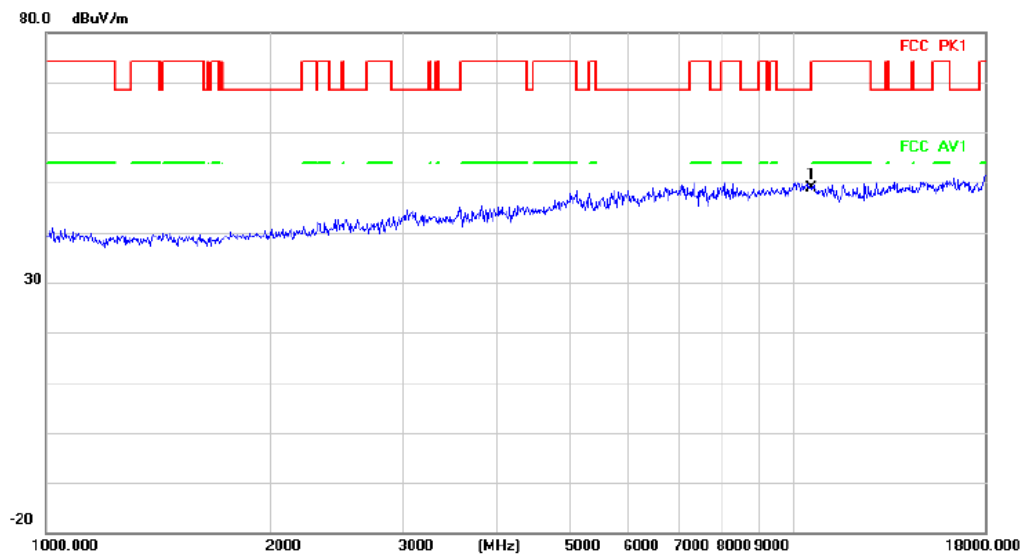

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10560.000	41.02	7.81	48.83	68.20	-19.37	peak		Comment


VERTICAL

Radiated Emission

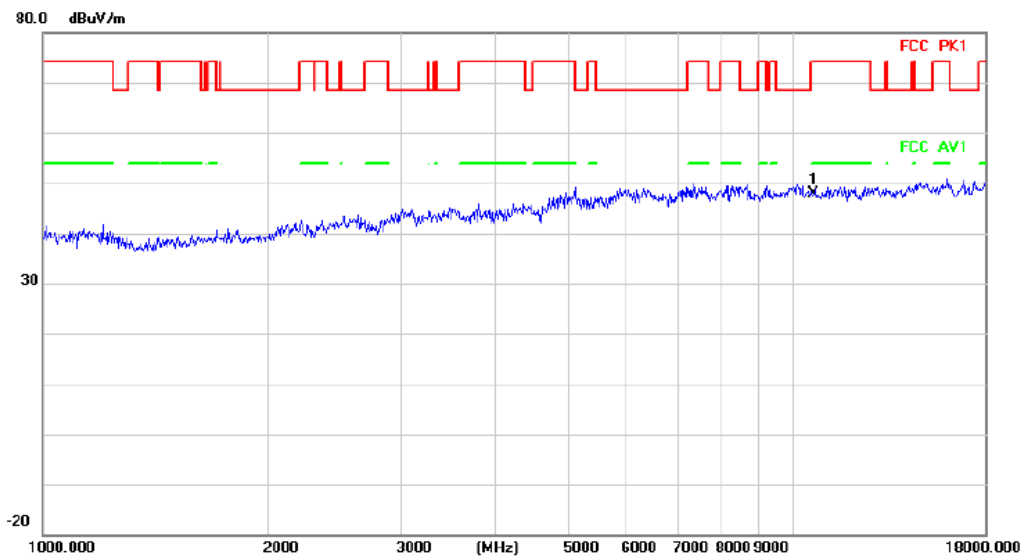

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	10640.000	40.01	7.87	47.88	74.00	-26.12	peak	


Radiated Emission

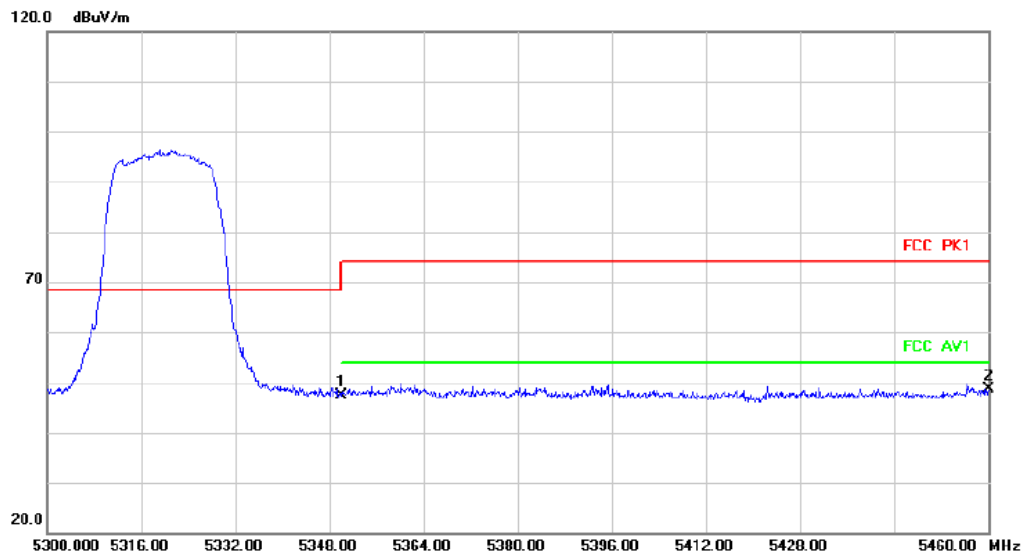

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		5350.000	42.21	5.25	47.46	68.20	-20.74	peak	
2	*	5460.000	43.50	5.03	48.53	68.20	-19.67	peak	


HORIZONTAL

Radiated Emission

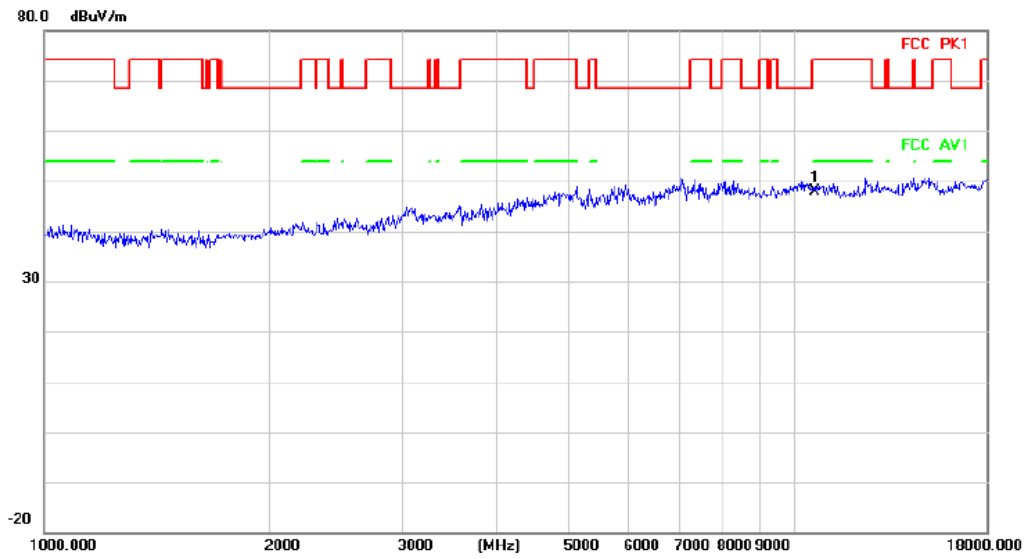

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10640.000	40.11	7.87	47.98	74.00	-26.02	peak		


Radiated Emission

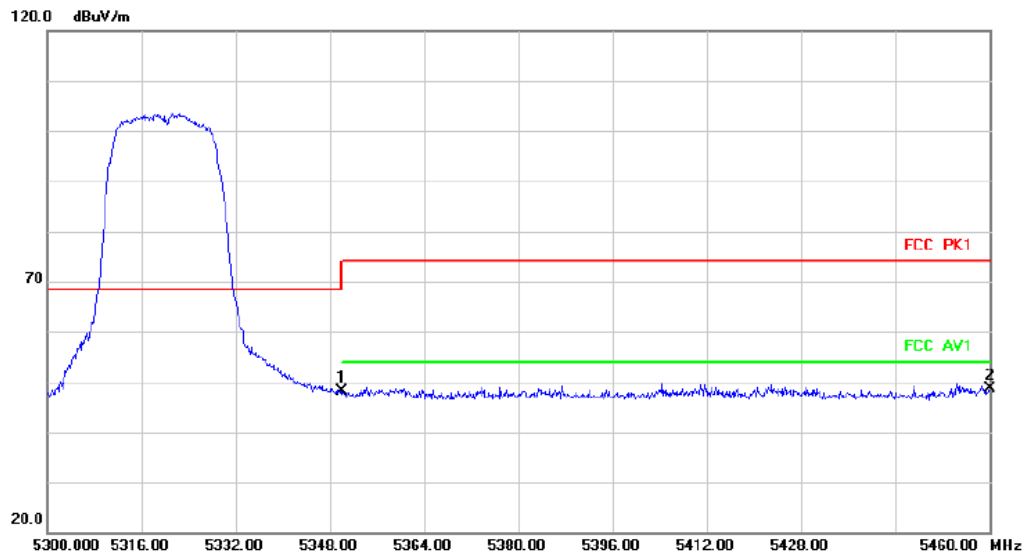

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5350.000	42.89	5.25	48.14	68.20	-20.06	peak		
2	*	5460.000	43.52	5.03	48.55	68.20	-19.65	peak		


VERTICAL

Radiated Emission

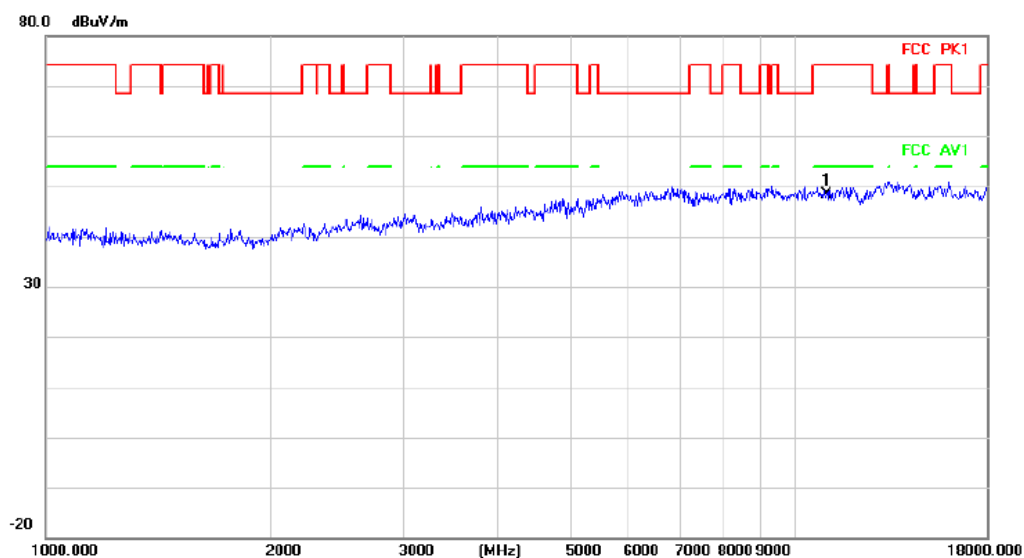

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11000.000	40.95	7.38	48.33	74.00	-25.67	peak		Comment


Radiated Emission

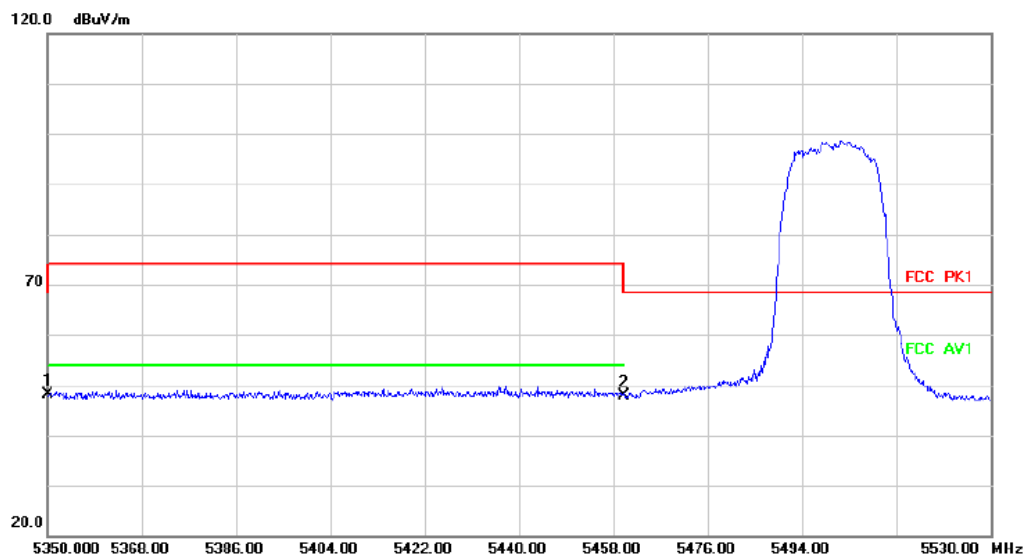

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5350.000	42.84	5.25	48.09	68.20	-20.11	peak		Comment
2		5460.000	42.86	5.03	47.89	68.20	-20.31	peak		


HORIZONTAL

Radiated Emission

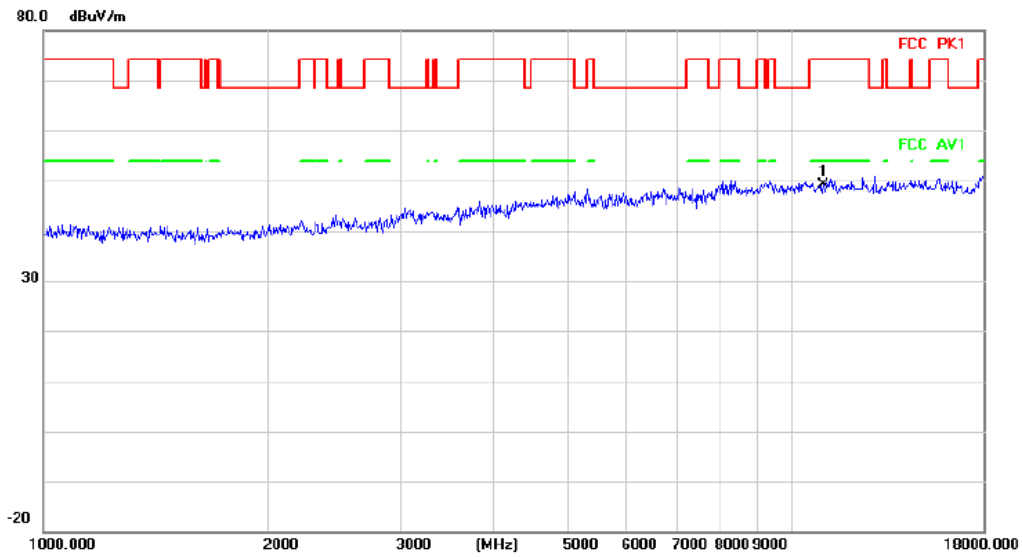

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11000.000	41.84	7.38	49.22	74.00	-24.78	peak		


Radiated Emission

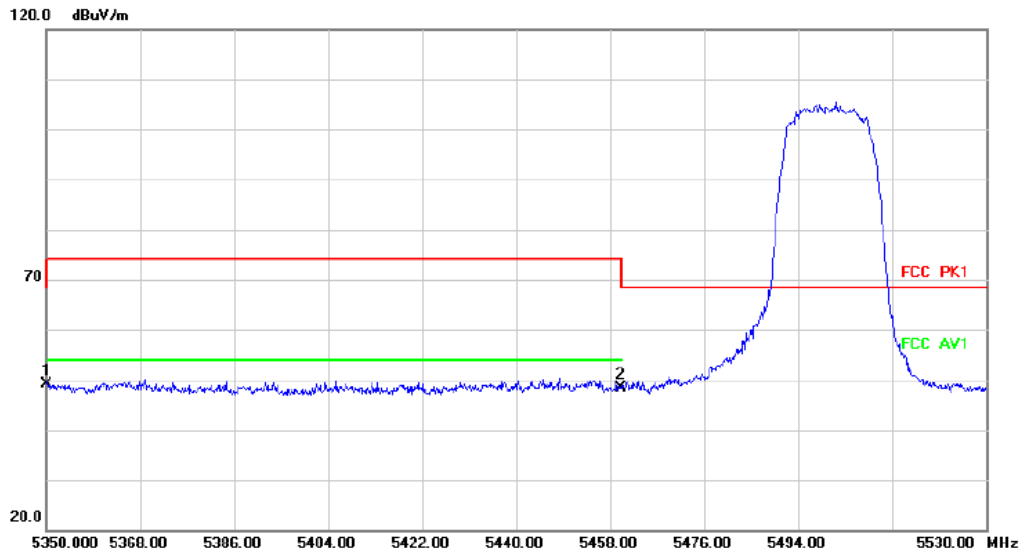

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5350.000	43.88	5.25	49.13	68.20	-19.07	peak		
2		5460.000	43.42	5.03	48.45	68.20	-19.75	peak		

VERTICAL


Radiated Emission

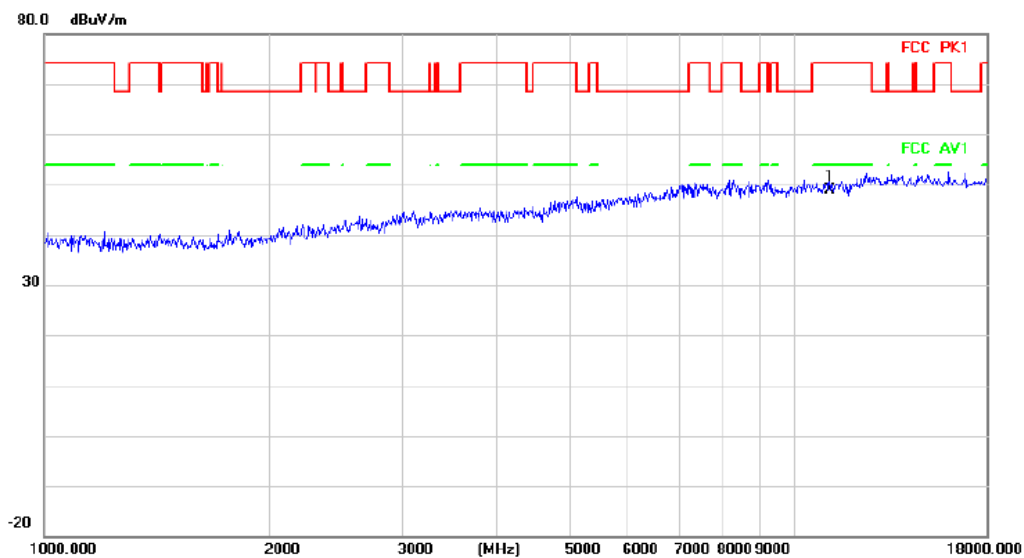

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11160.000	41.44	7.54	48.98	74.00	-25.02	peak		Comment

HORIZONTAL


Radiated Emission

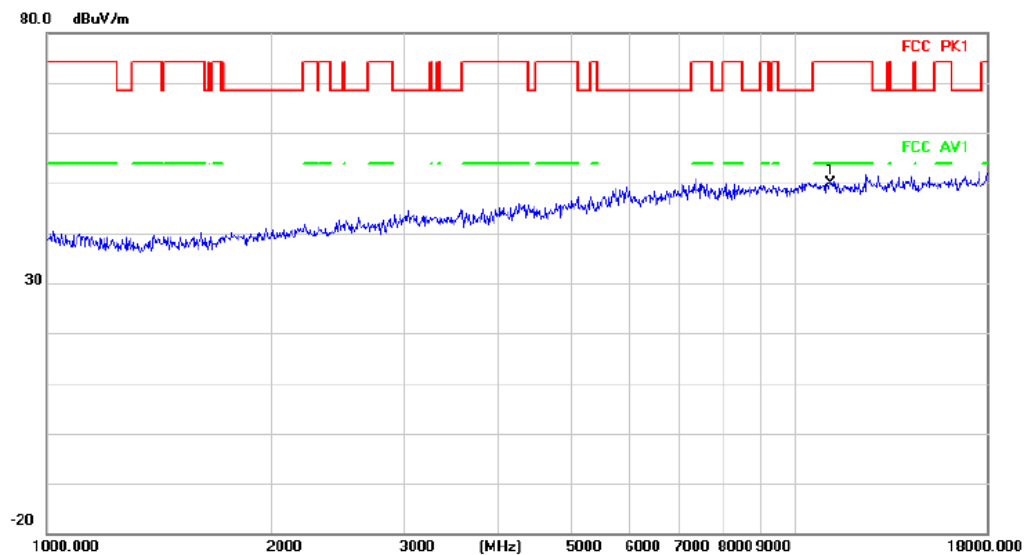

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11160.000	42.23	7.54	49.77	74.00	-24.23	peak		Comment

VERTICAL


Radiated Emission

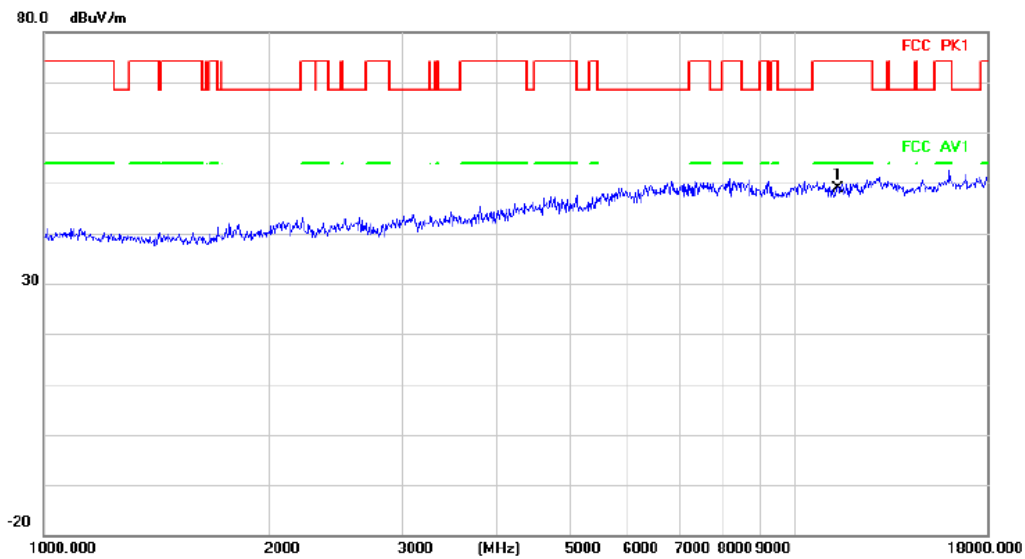

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11400.000	41.26	7.54	48.80	74.00	-25.20	peak		

HORIZONTAL


Radiated Emission

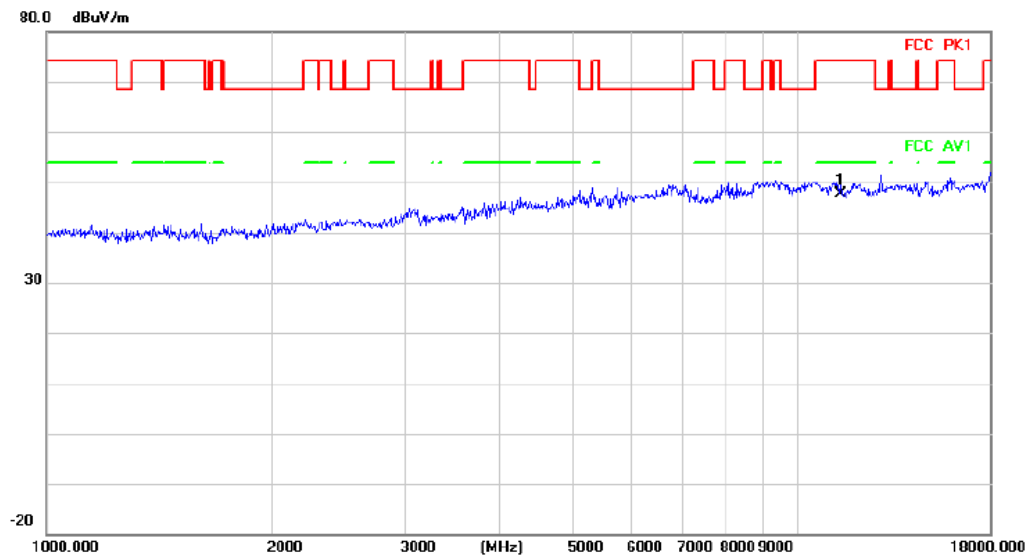

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11400.000	40.02	7.54	47.56	74.00	-26.44	peak		


VERTICAL

Radiated Emission

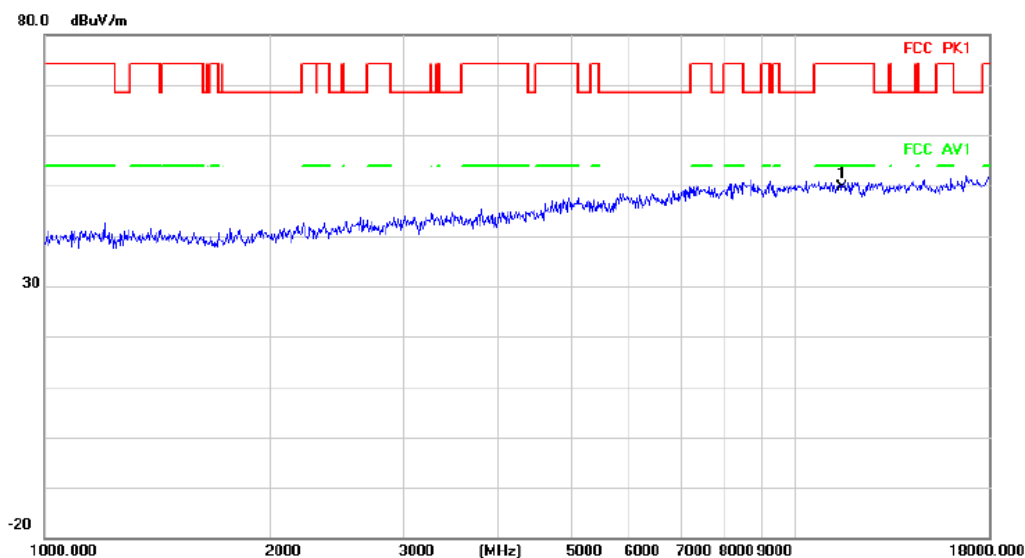

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11490.000	41.86	7.76	49.62	74.00	-24.38	peak		Comment


Radiated Emission

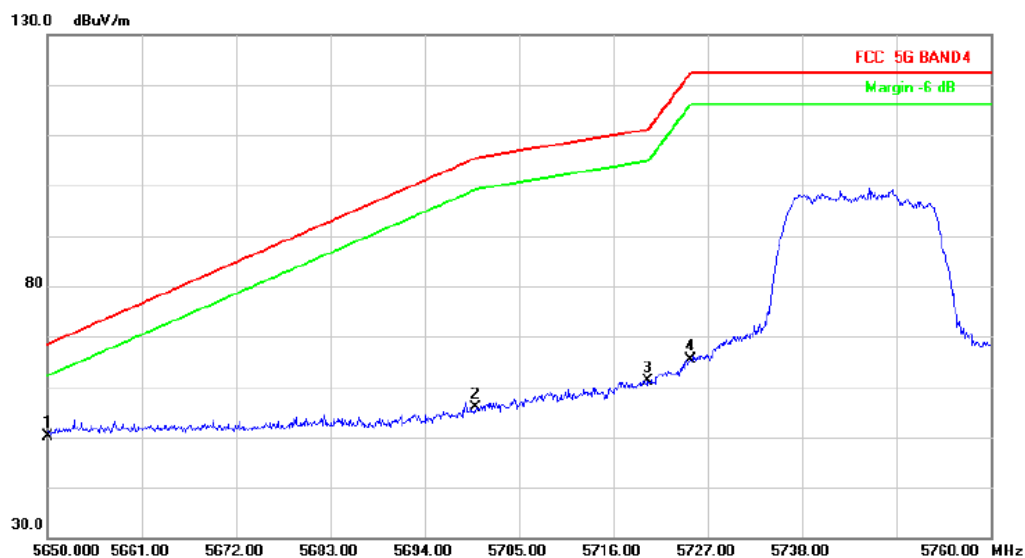

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5650.000	44.52	5.72	50.24	68.20	-17.96	peak		Comment
2		5700.000	49.85	6.00	55.85	105.20	-49.35	peak		
3		5720.000	55.40	5.82	61.22	110.80	-49.58	peak		
4		5725.000	59.64	5.78	65.42	122.20	-56.78	peak		


HORIZONTAL

Radiated Emission

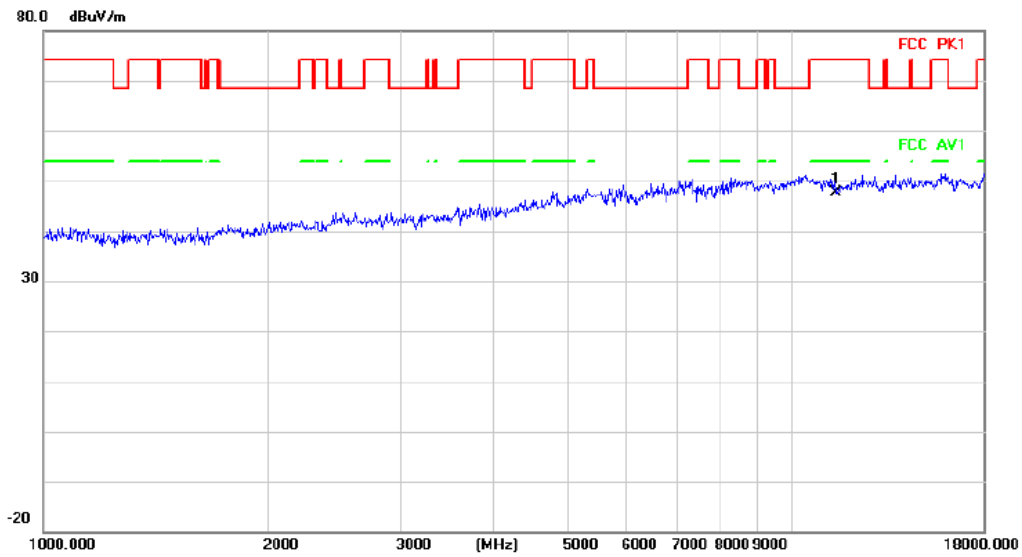

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11490.000	39.78	7.76	47.54	74.00	-26.46	peak	


Radiated Emission

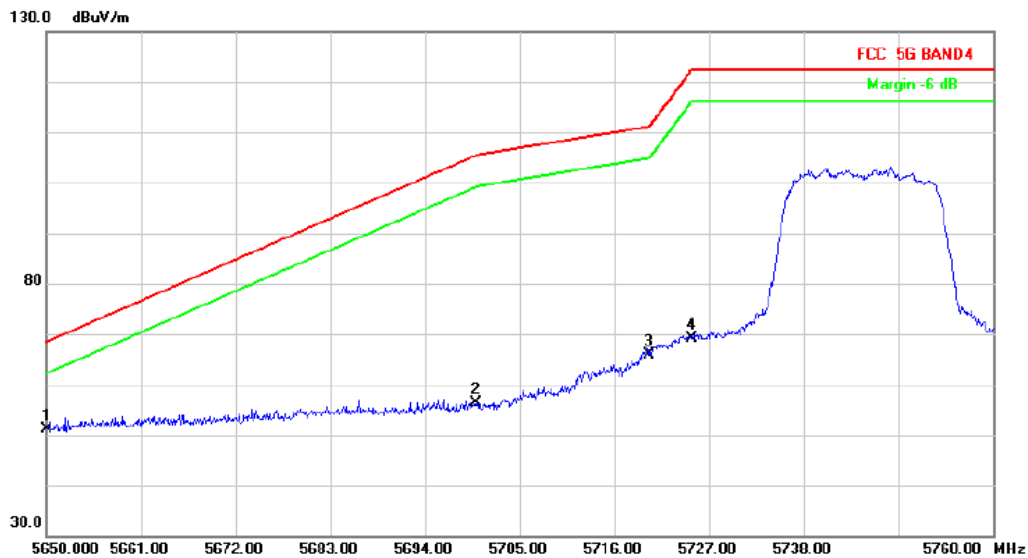

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	5650.000	45.44	5.72	51.16	68.20	-17.04	peak	
2		5700.000	50.47	6.00	56.47	105.20	-48.73	peak	
3		5720.000	60.15	5.82	65.97	110.80	-44.83	peak	
4		5725.000	63.41	5.78	69.19	122.20	-53.01	peak	

VERTICAL


Radiated Emission

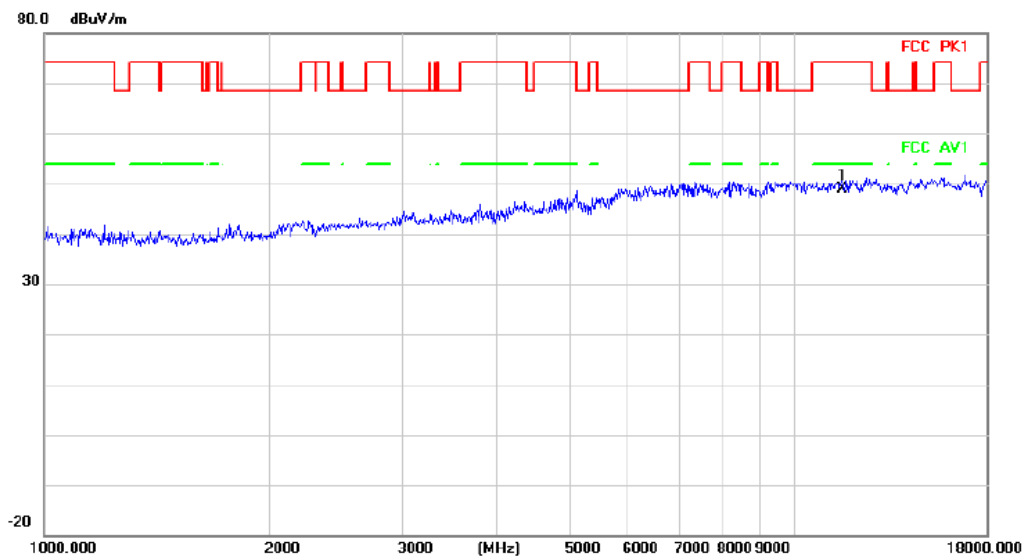

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11570.000	41.37	7.60	48.97	74.00	-25.03	peak		Comment

HORIZONTAL


Radiated Emission

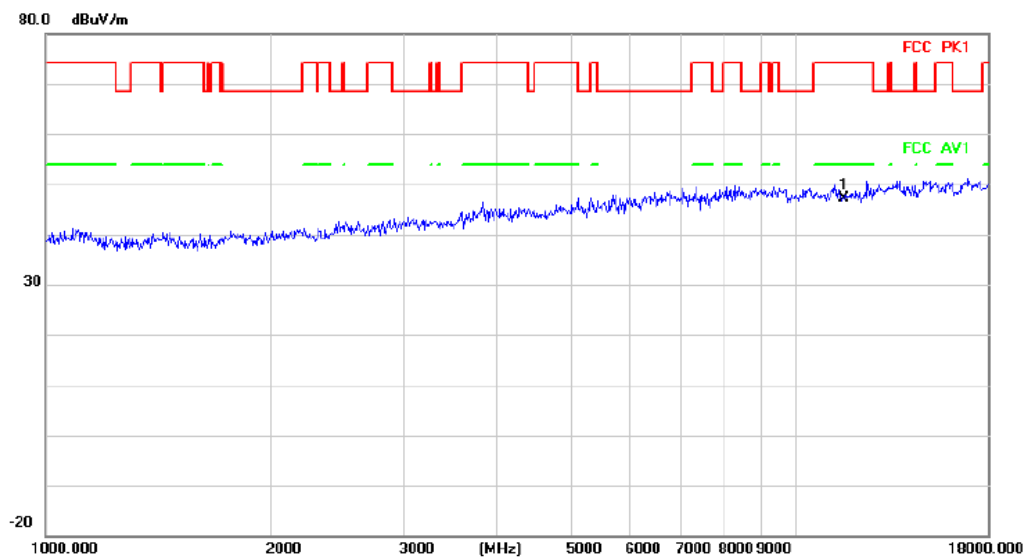

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11570.000	39.63	7.60	47.23	74.00	-26.77	peak		Comment


VERTICAL

Radiated Emission

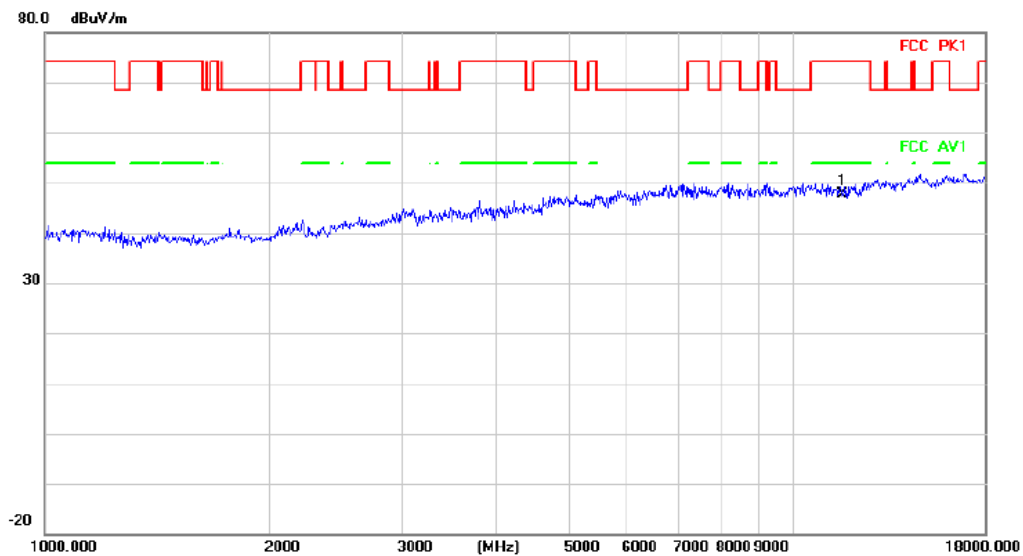

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11650.000	40.28	7.45	47.73	74.00	-26.27	peak		


Radiated Emission

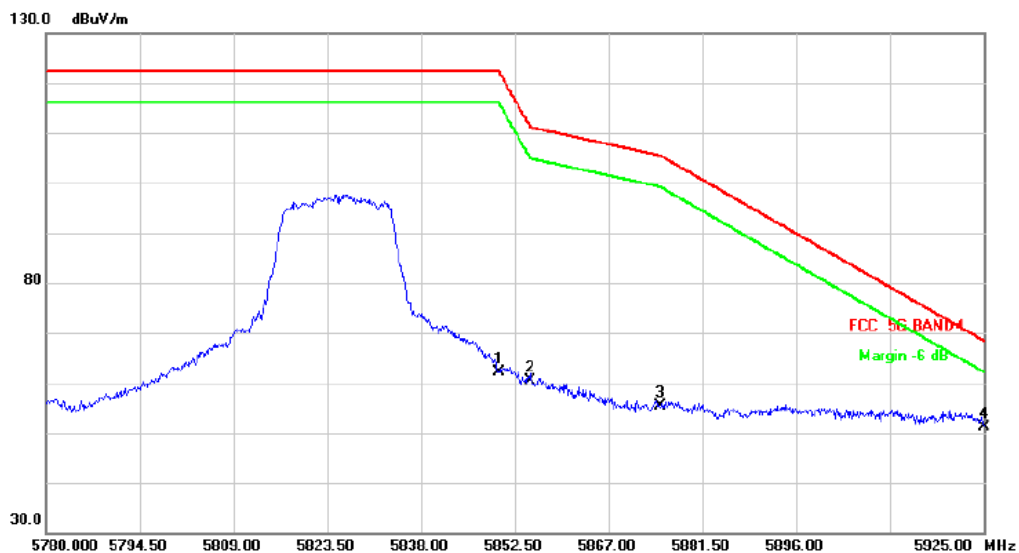

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.000	55.28	6.79	62.07	122.20	-60.13	peak		
2		5855.000	53.59	6.72	60.31	110.80	-50.49	peak		
3		5875.000	48.81	6.46	55.27	105.20	-49.93	peak		
4	*	5925.000	44.58	6.46	51.04	68.20	-17.16	peak		


HORIZONTAL

Radiated Emission

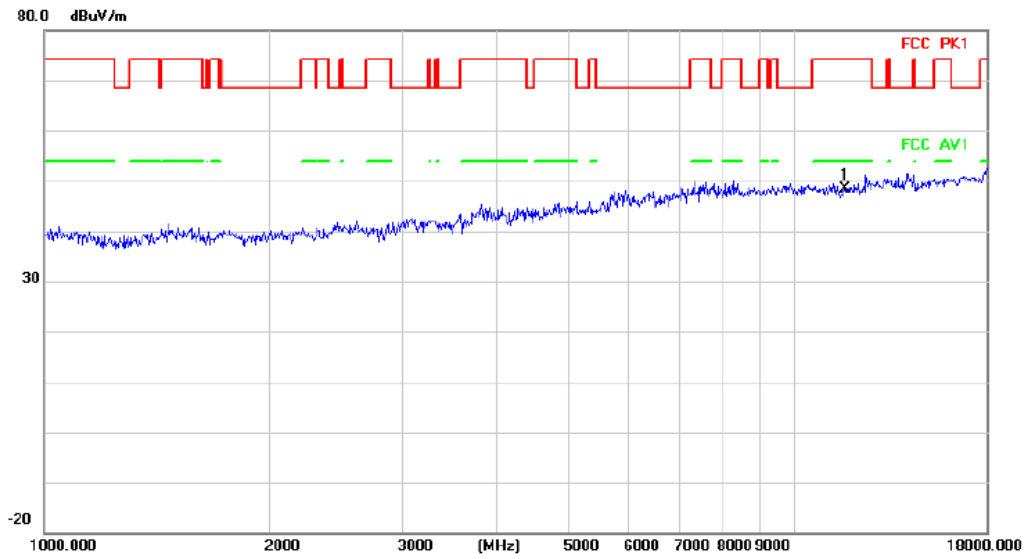

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11650.000	41.03	7.45	48.48	74.00	-25.52	peak		


Radiated Emission

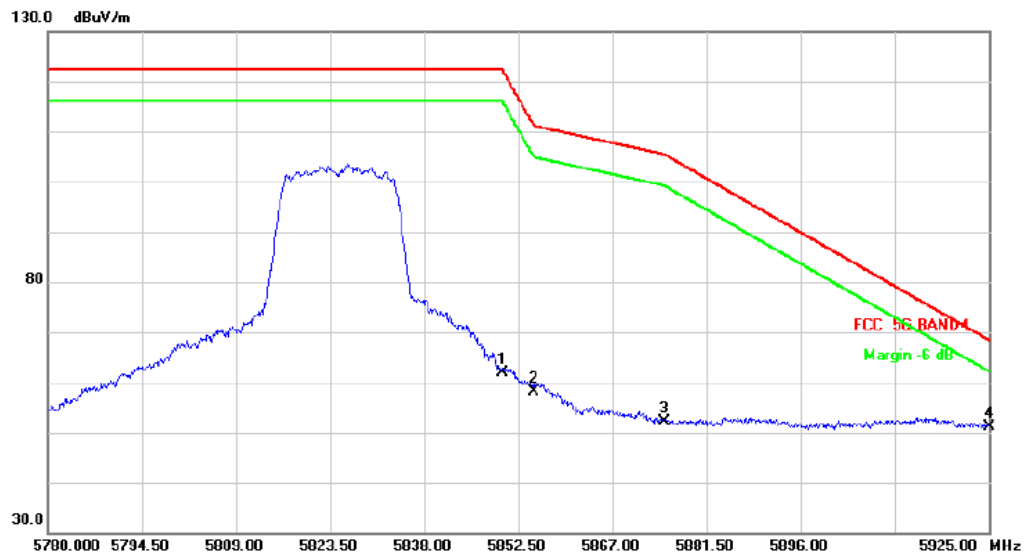

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5850.000	55.15	6.79	61.94	122.20	-60.26	peak		
2		5855.000	51.29	6.72	58.01	110.80	-52.79	peak		
3		5875.000	45.55	6.46	52.01	105.20	-53.19	peak		
4	*	5925.000	44.65	6.46	51.11	68.20	-17.09	peak		


VERTICAL

Radiated Emission

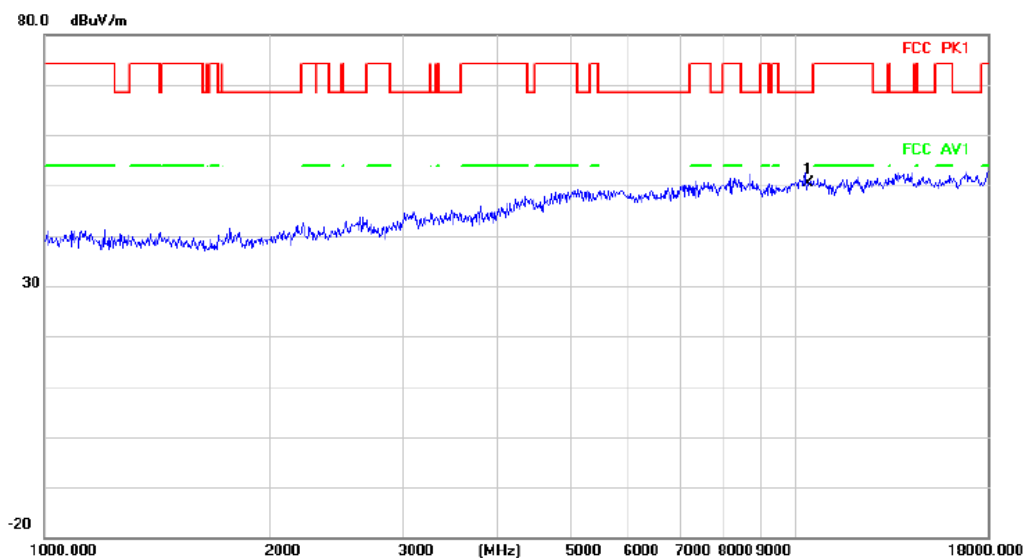

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10380.000	43.10	7.32	50.42	68.20	-17.78	peak		Comment


Radiated Emission

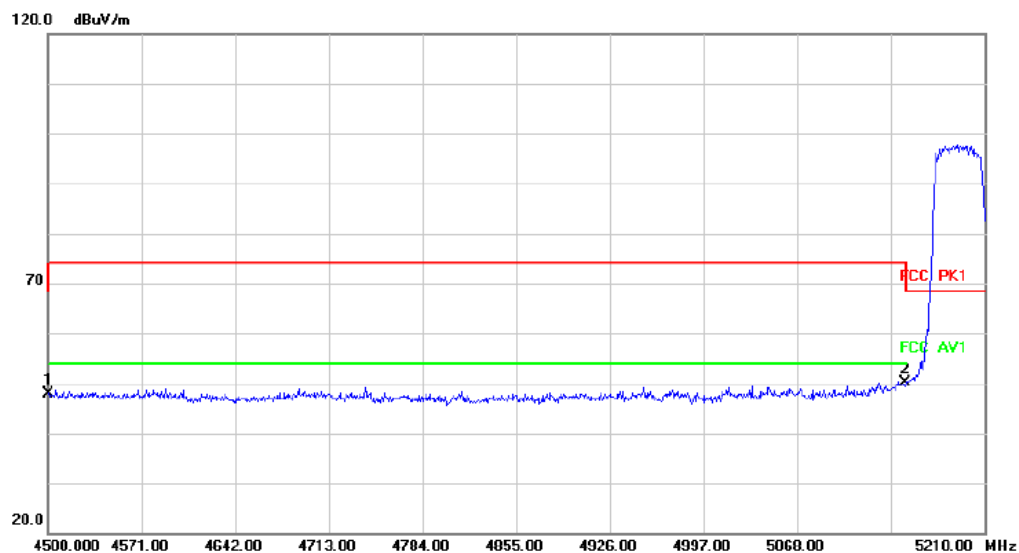

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4500.000	43.43	4.45	47.88	68.20	-20.32	peak		Comment
2	*	5150.000	44.19	6.04	50.23	68.20	-17.97	peak		Comment


HORIZONTAL

Radiated Emission

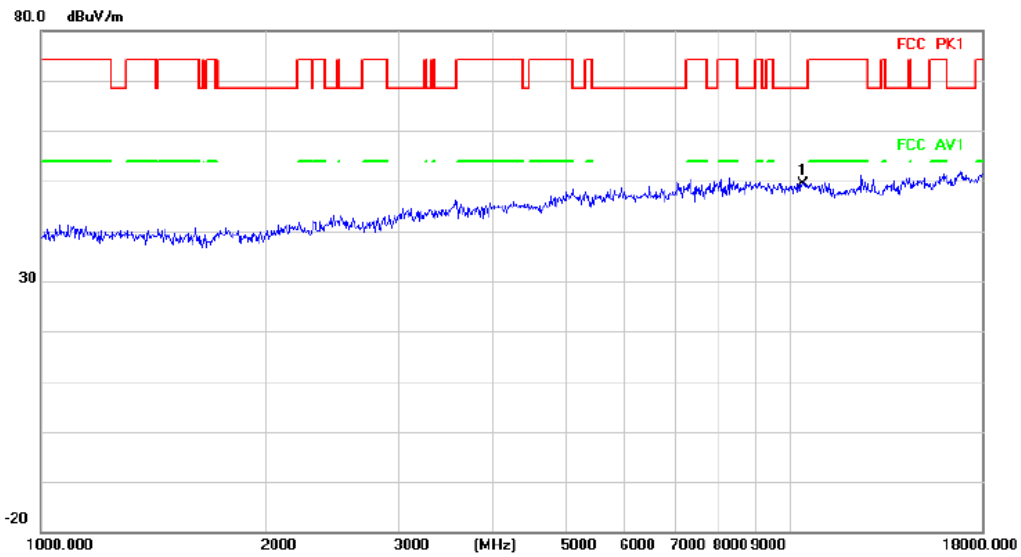


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10380.000	41.97	7.32	49.29	68.20	-18.91	peak		

Radiated Emission

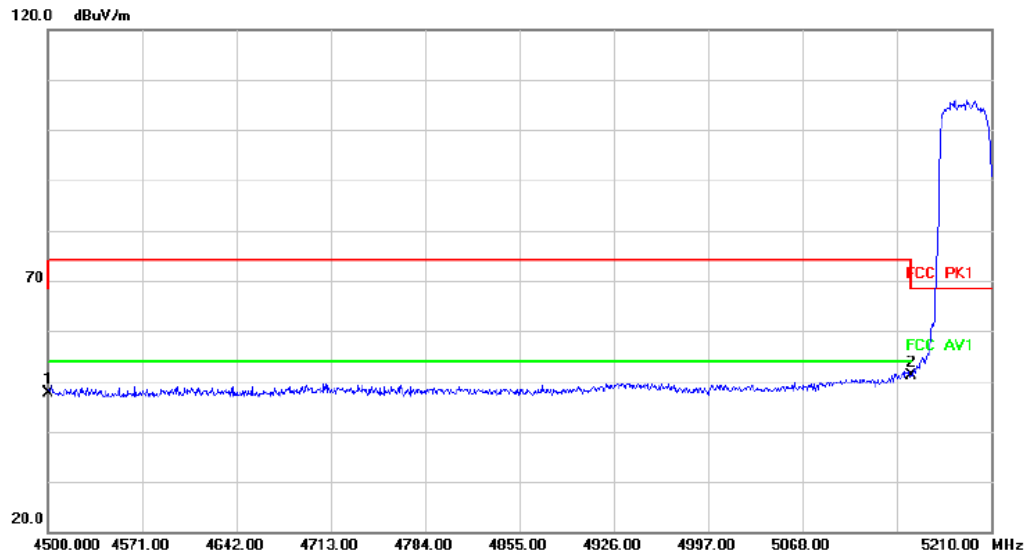


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4500.000	43.21	4.45	47.66	68.20	-20.54	peak		
2	*	5150.000	45.01	6.04	51.05	68.20	-17.15	peak		

VERTICAL

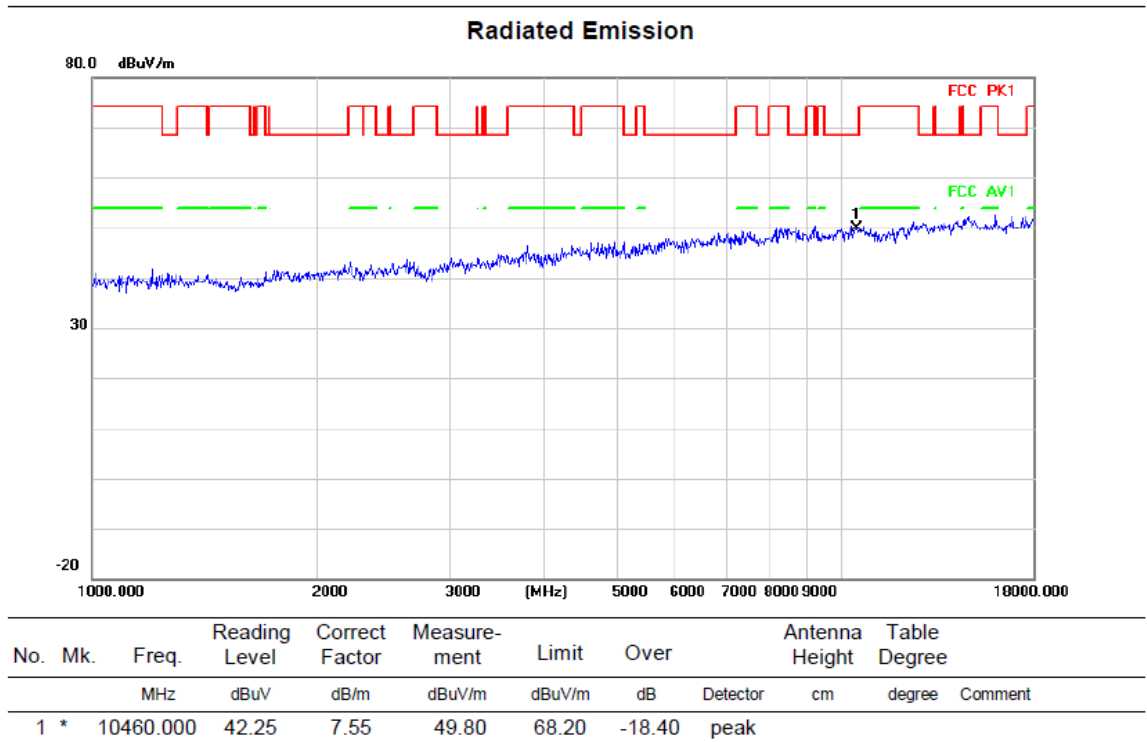


HORIZONTAL

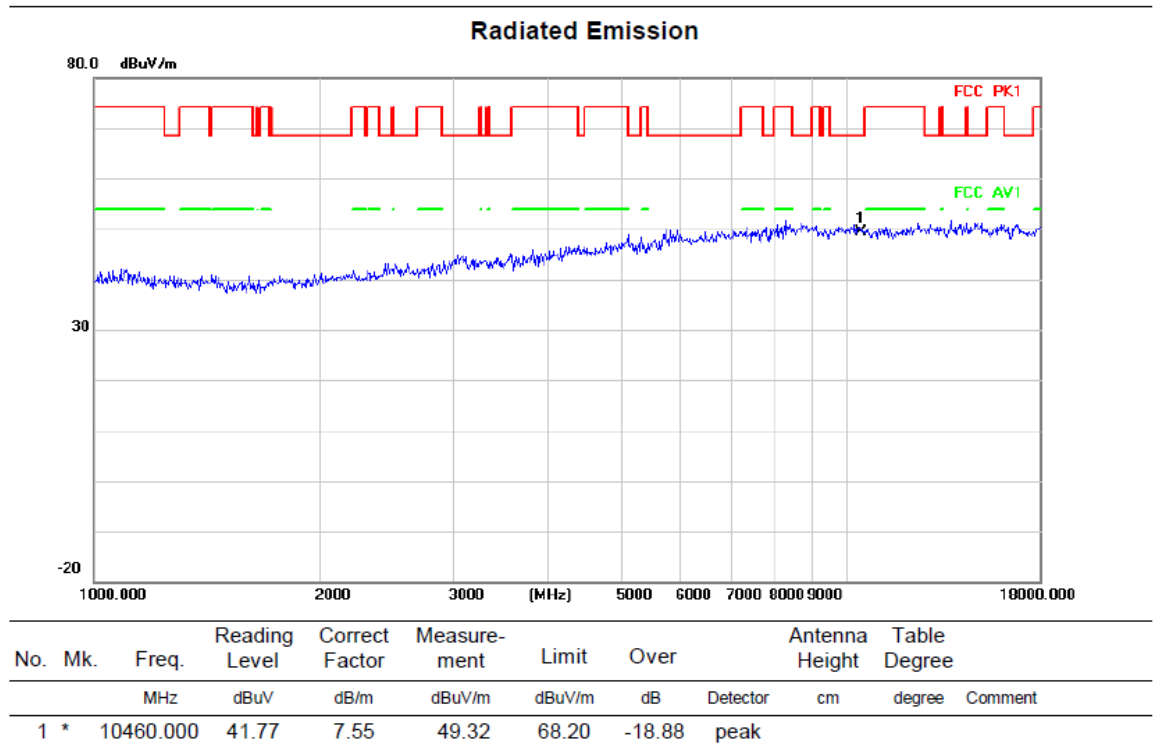

VERTICAL


Radiated Emission

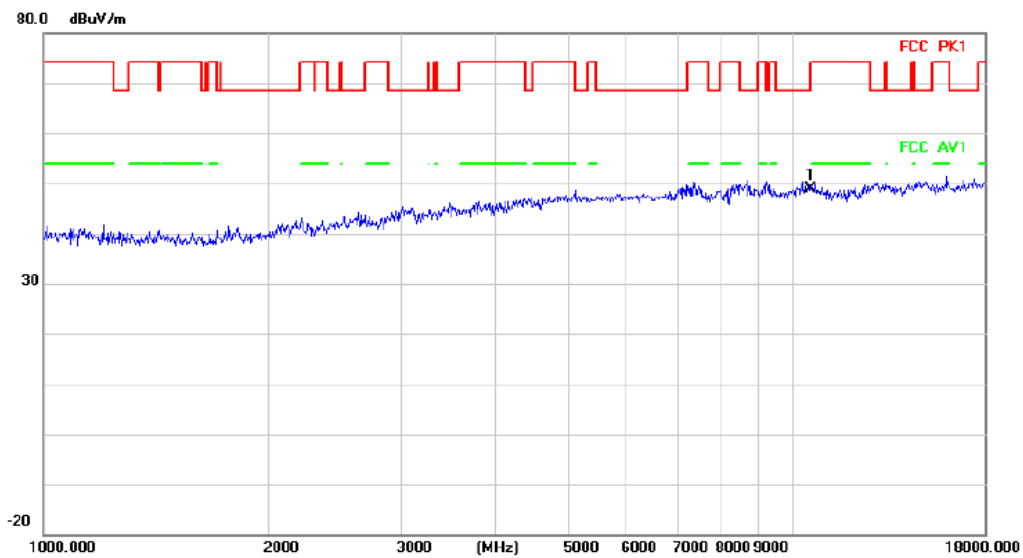

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10540.000	41.18	7.76	48.94	68.20	-19.26	peak		Comment

HORIZONTAL


Radiated Emission

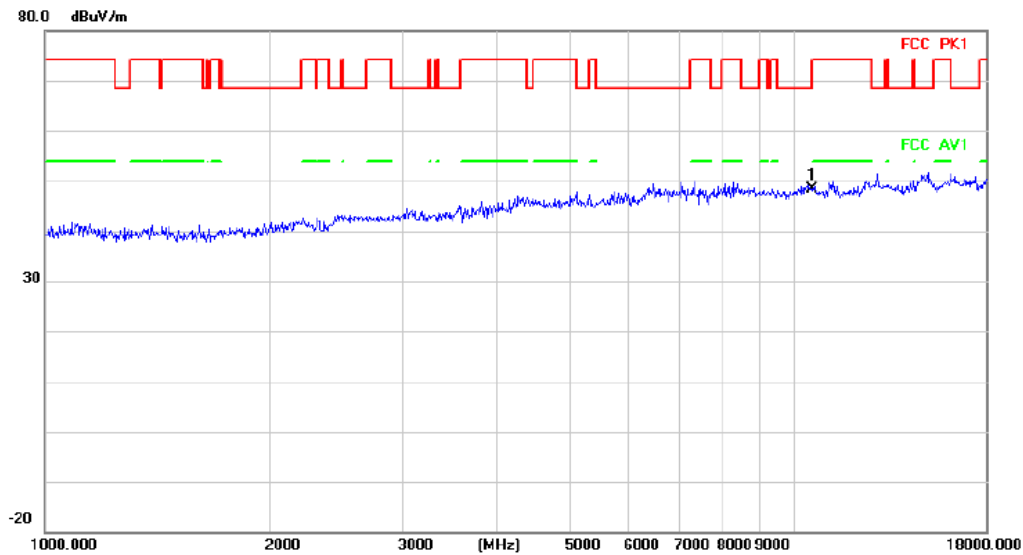

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10540.000	40.57	7.76	48.33	68.20	-19.87	peak		Comment


VERTICAL

Radiated Emission

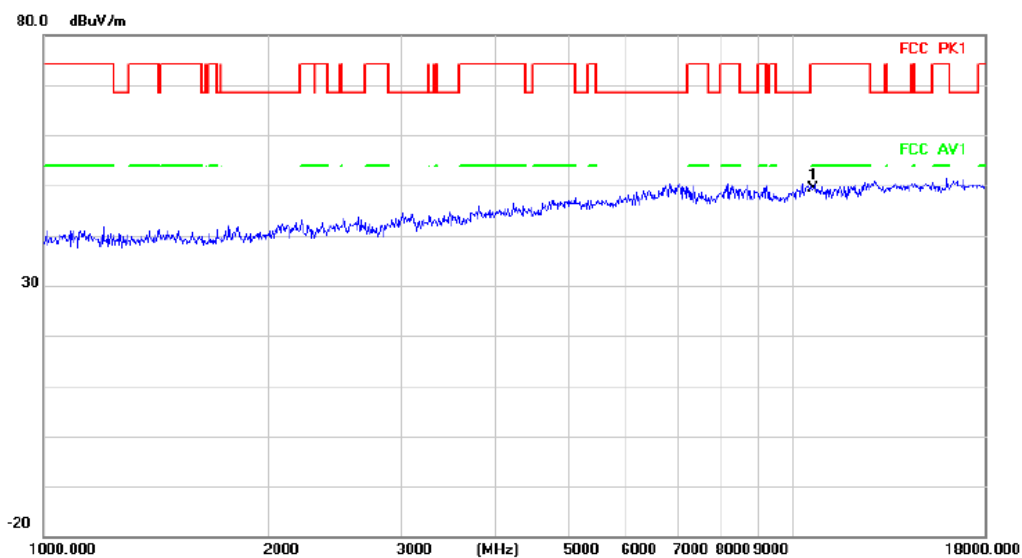

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10620.000	41.51	7.89	49.40	74.00	-24.60	peak		Comment


Radiated Emission

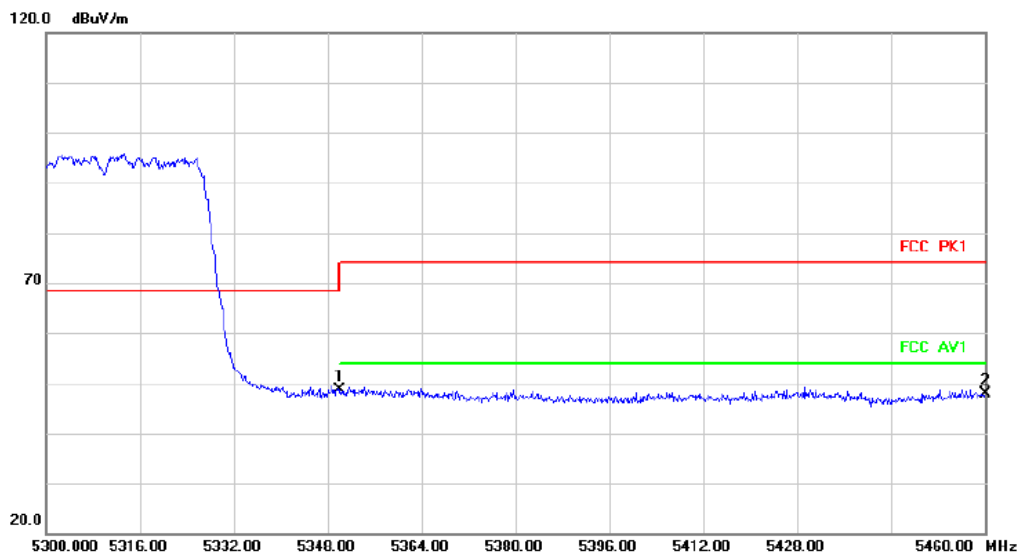


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5350.000	43.48	5.25	48.73	68.20	-19.47	peak		Comment
2		5460.000	42.74	5.03	47.77	68.20	-20.43	peak		

HORIZONTAL

Radiated Emission

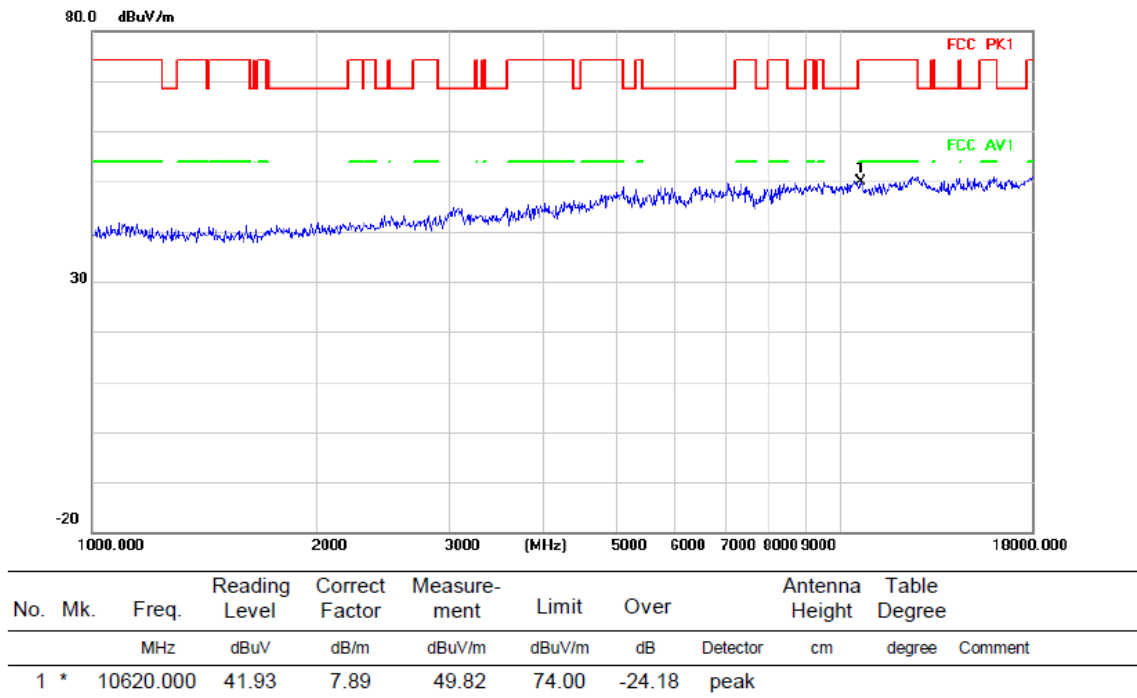


Radiated Emission

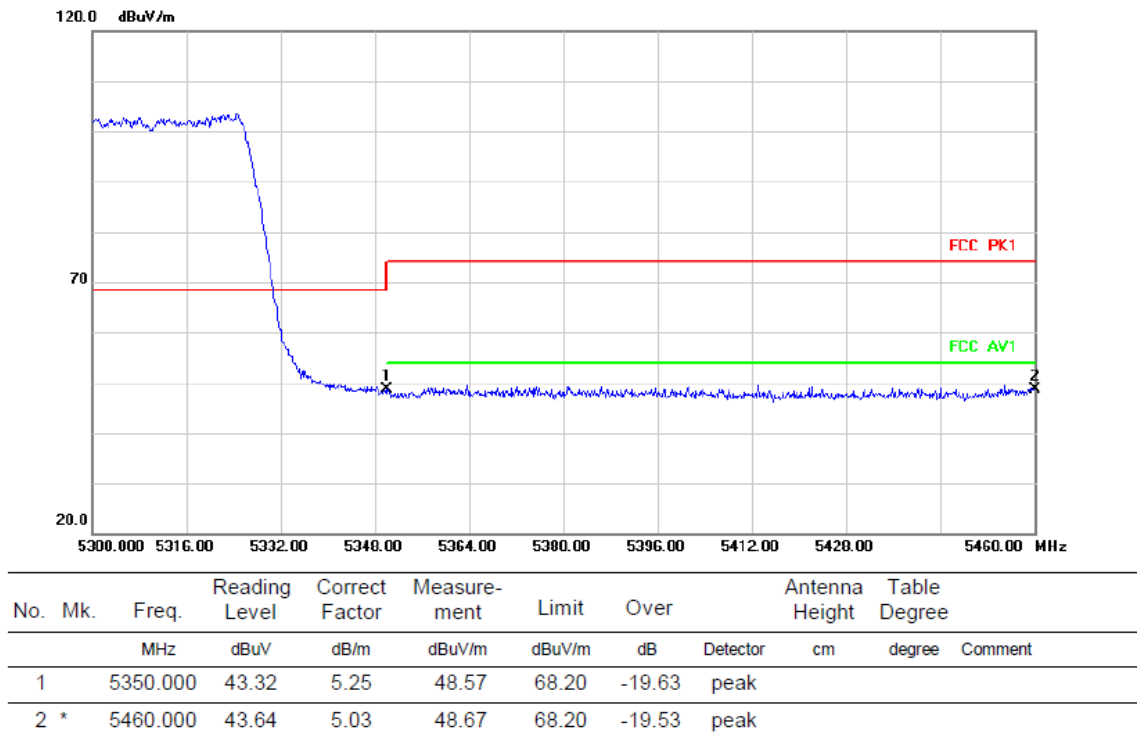


VERTICAL

Radiated Emission

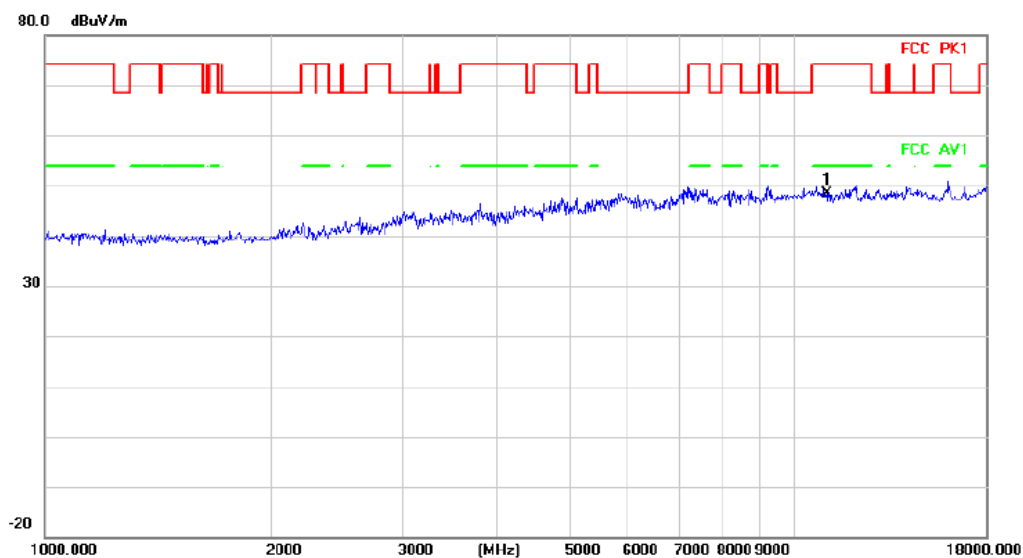

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11020.000	40.85	7.42	48.27	74.00	-25.73	peak		Comment


Radiated Emission

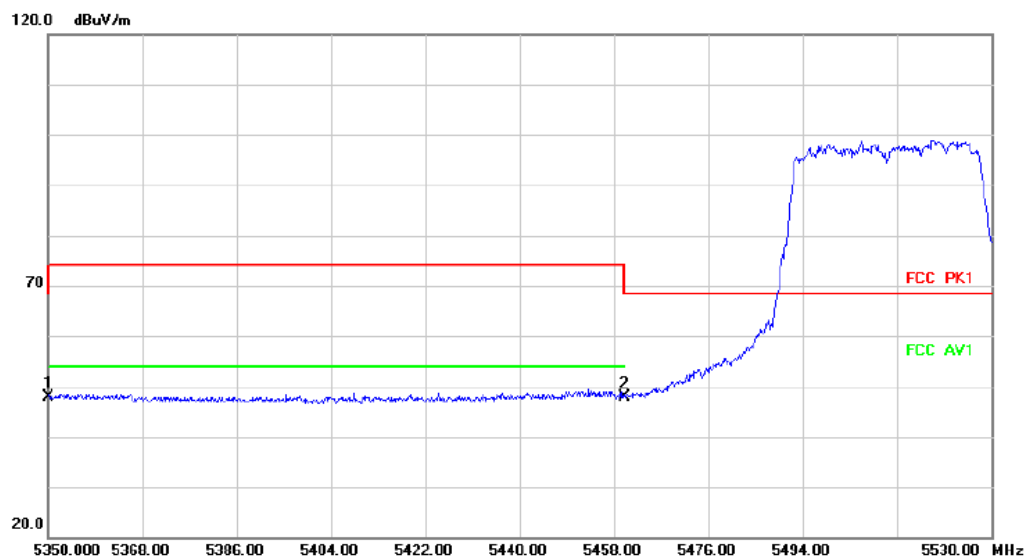

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5350.000	42.74	5.25	47.99	68.20	-20.21	peak		Comment
2		5460.000	42.96	5.03	47.99	68.20	-20.21	peak		


HORIZONTAL

Radiated Emission

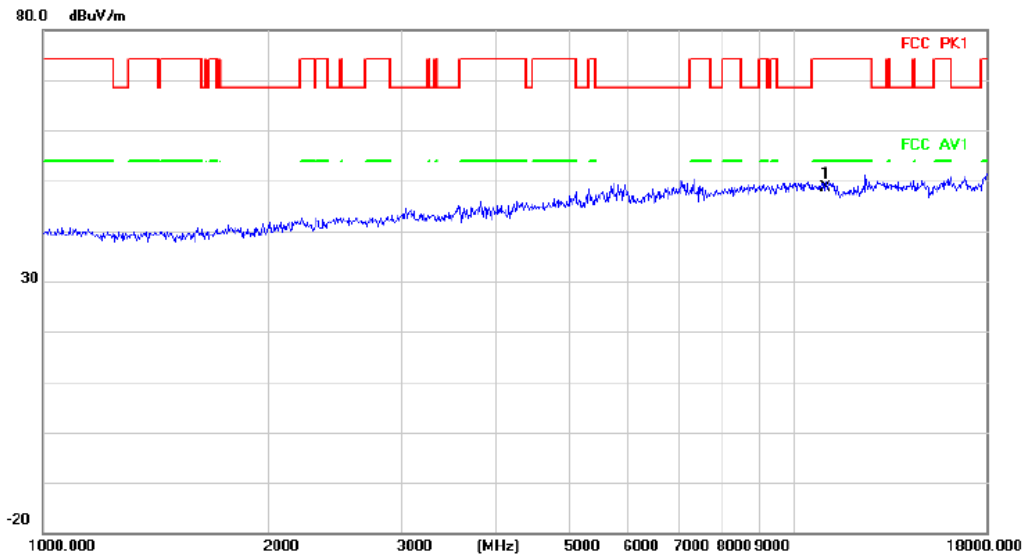

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11020.000	41.11	7.42	48.53	74.00	-25.47	peak		


Radiated Emission

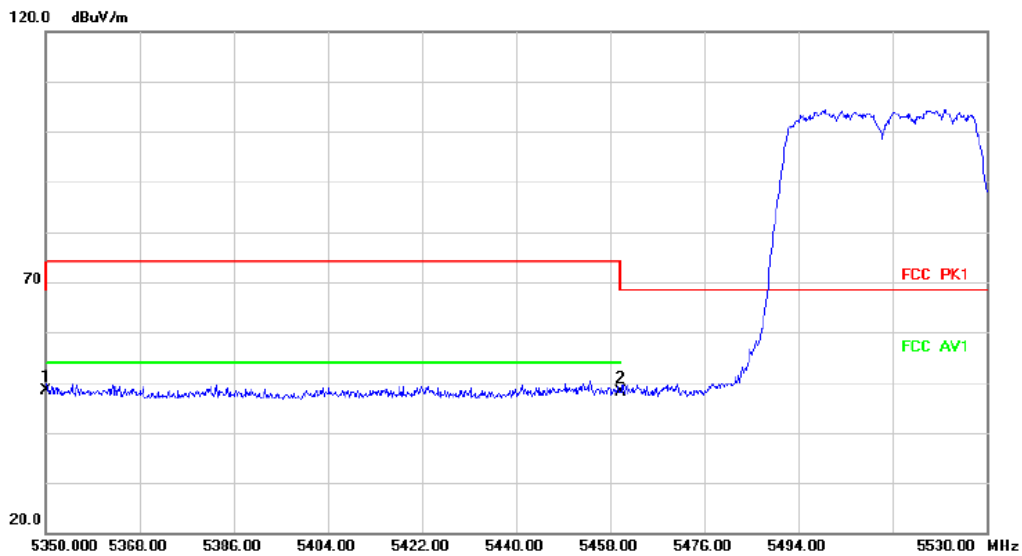

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5350.000	43.04	5.25	48.29	68.20	-19.91	peak		
2		5460.000	43.06	5.03	48.09	68.20	-20.11	peak		

VERTICAL


Radiated Emission

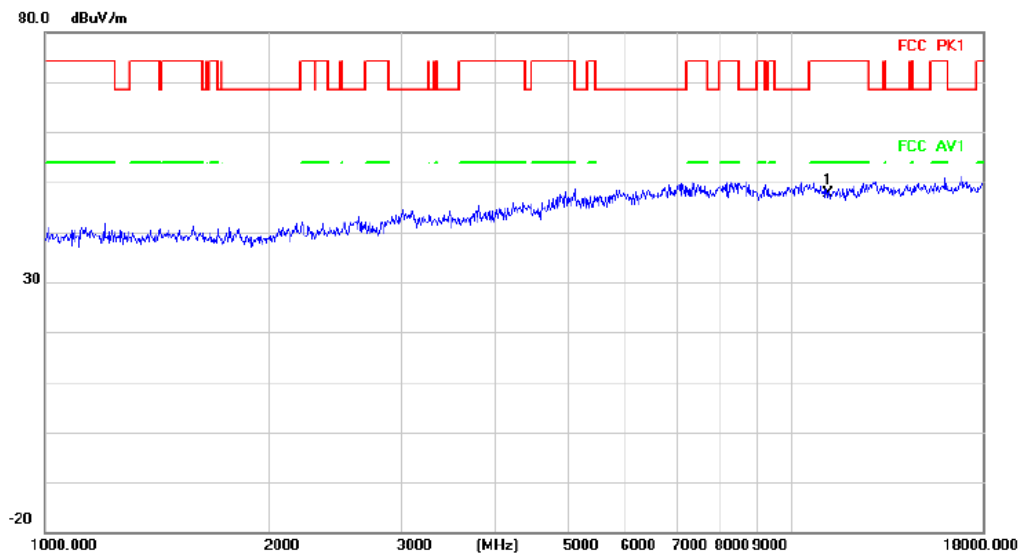

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11100.000	40.10	7.53	47.63	74.00	-26.37	peak		Comment

HORIZONTAL


Radiated Emission

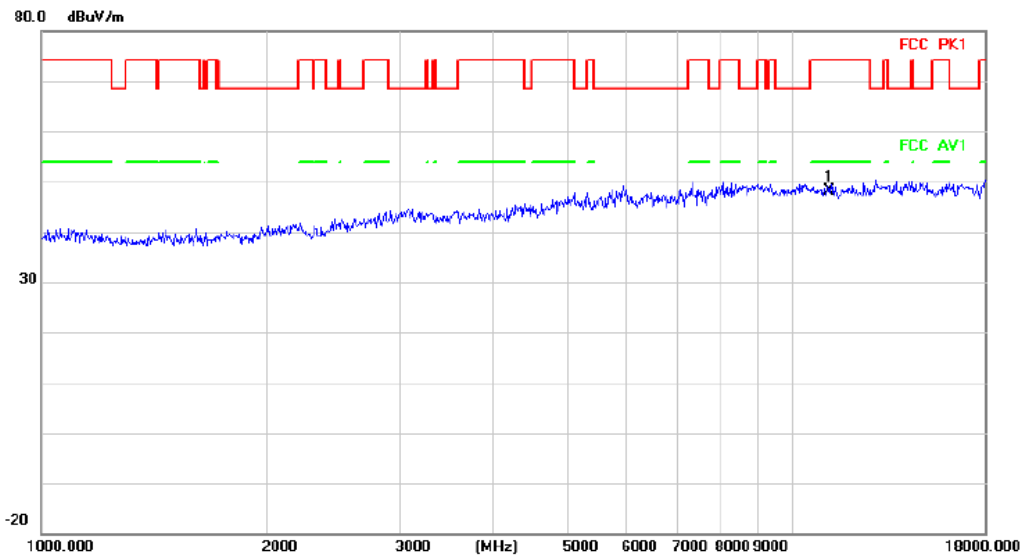

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11100.000	40.53	7.53	48.06	74.00	-25.94	peak		Comment

VERTICAL


Radiated Emission

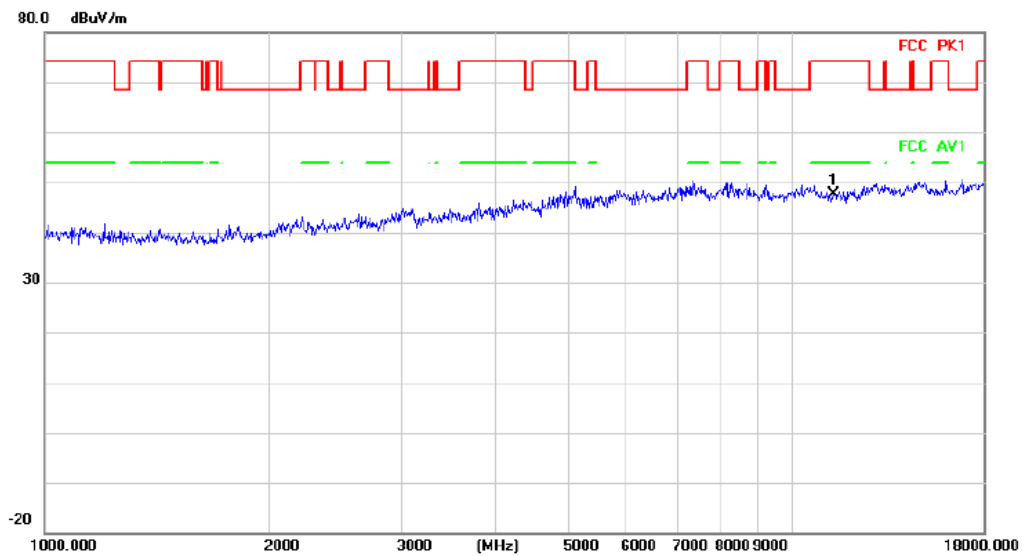

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11340.000	39.82	7.77	47.59	74.00	-26.41	peak		Comment

HORIZONTAL


Radiated Emission

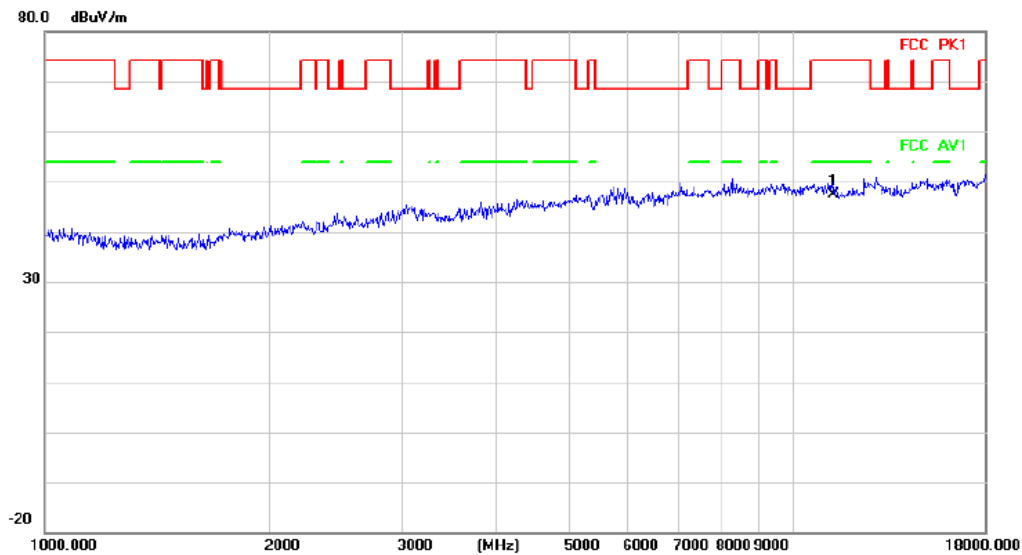

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11340.000	39.60	7.77	47.37	74.00	-26.63	peak		Comment


VERTICAL

Radiated Emission

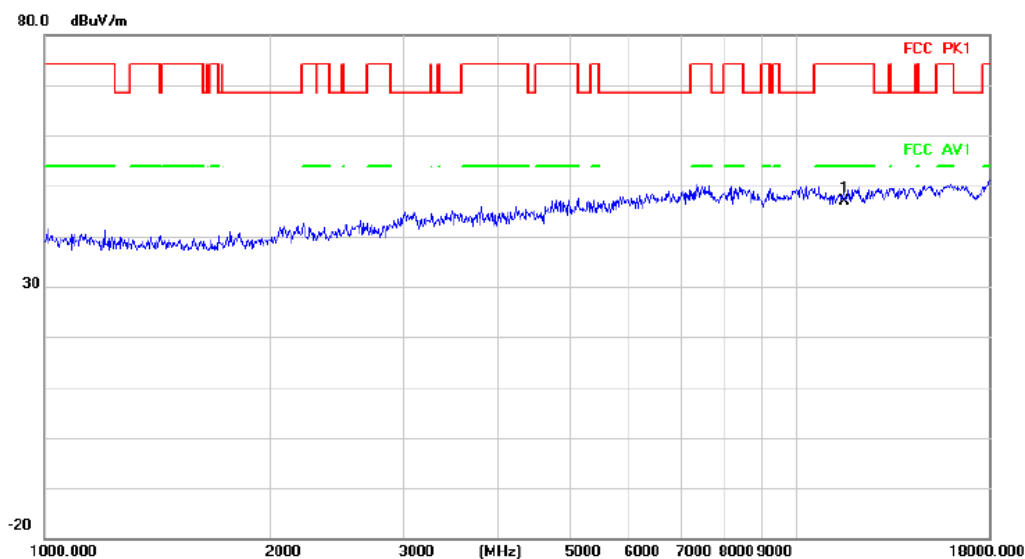

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11570.000	39.37	7.60	46.97	74.00	-27.03	peak		


Radiated Emission

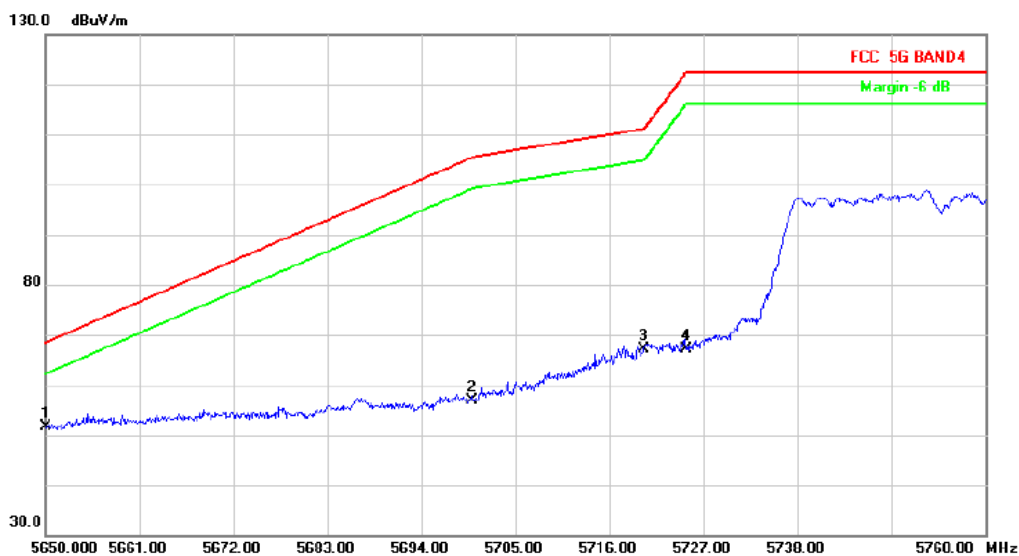

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5650.000	45.95	5.72	51.67	68.20	-16.53	peak		
2		5700.000	50.79	6.00	56.79	105.20	-48.41	peak		
3		5720.000	61.21	5.82	67.03	110.80	-43.77	peak		
4		5725.000	61.34	5.78	67.12	122.20	-55.08	peak		


HORIZONTAL

Radiated Emission

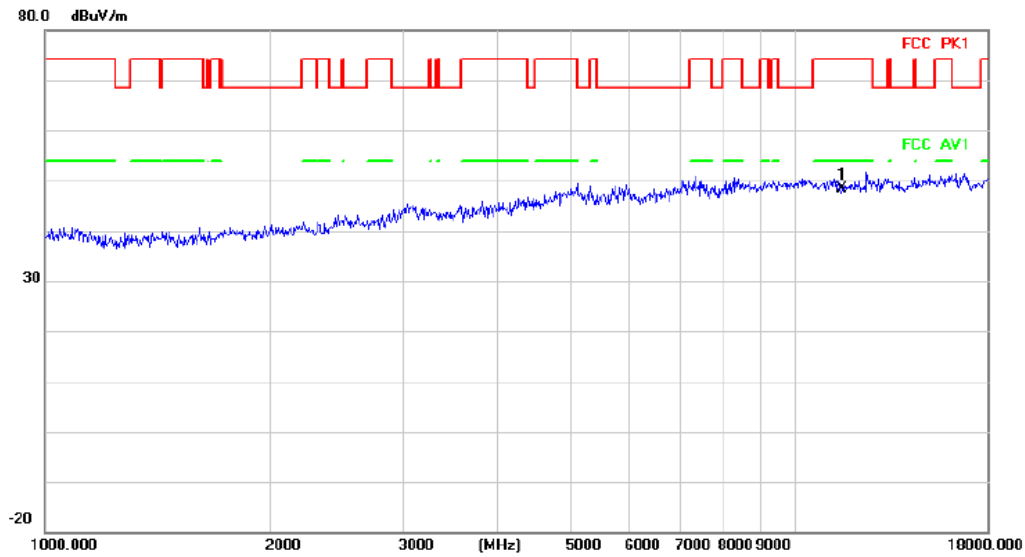

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11510.000	40.74	7.76	48.50	74.00	-25.50	peak		


Radiated Emission

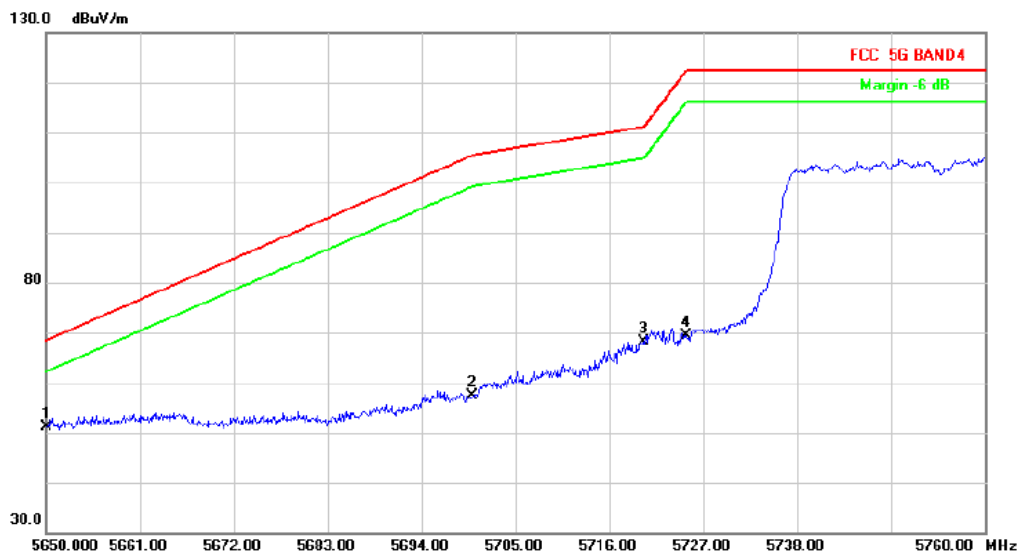

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5650.000	45.38	5.72	51.10	68.20	-17.10	peak		
2		5700.000	51.33	6.00	57.33	105.20	-47.87	peak		
3		5720.000	62.21	5.82	68.03	110.80	-42.77	peak		
4		5725.000	63.58	5.78	69.36	122.20	-52.84	peak		


VERTICAL

Radiated Emission

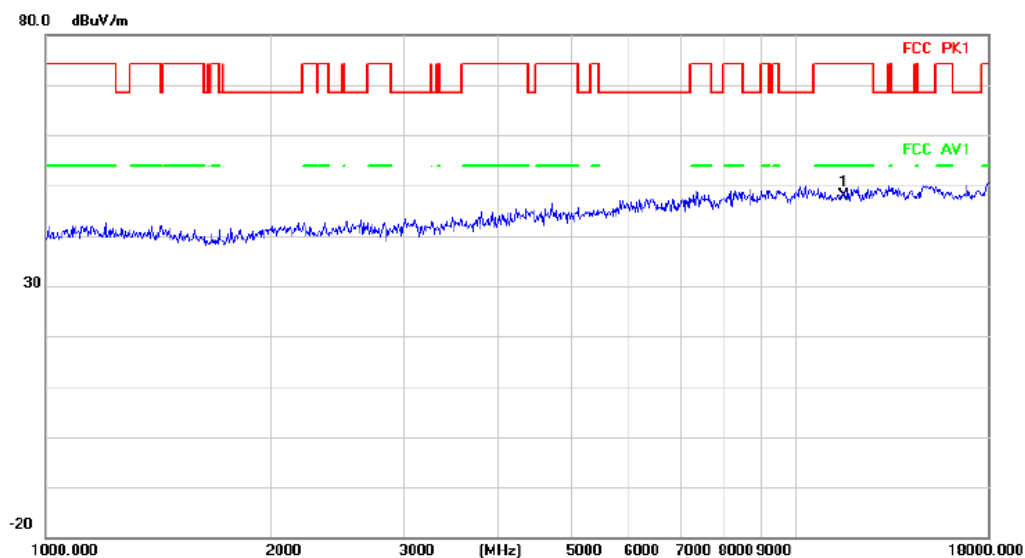

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11590.000	40.41	7.56	47.97	74.00	-26.03	peak		


Radiated Emission

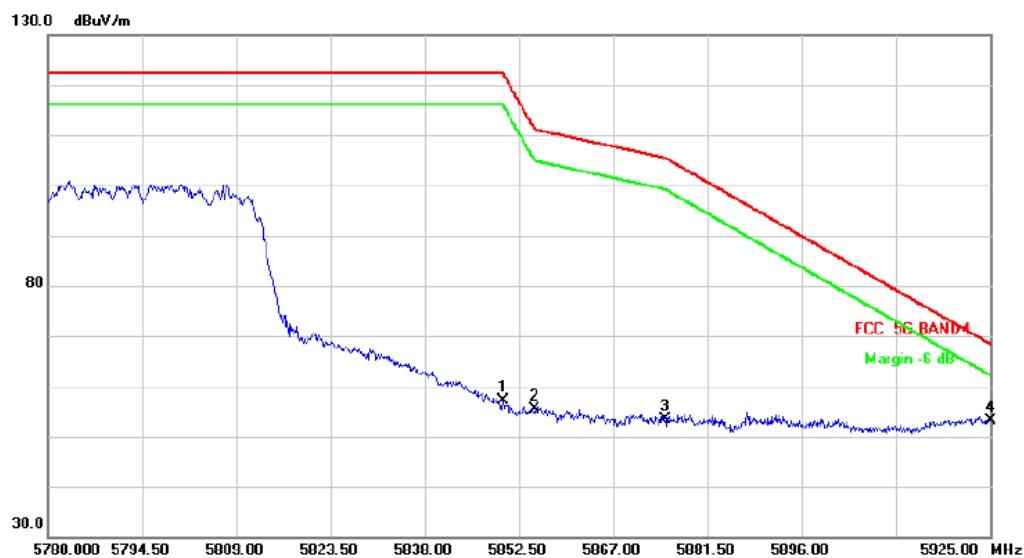

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5850.000	50.42	6.79	57.21	122.20	-64.99	peak		
2		5855.000	48.58	6.72	55.30	110.80	-55.50	peak		
3		5875.000	46.84	6.46	53.30	105.20	-51.90	peak		
4	*	5925.000	46.72	6.46	53.18	68.20	-15.02	peak		


HORIZONTAL

Radiated Emission

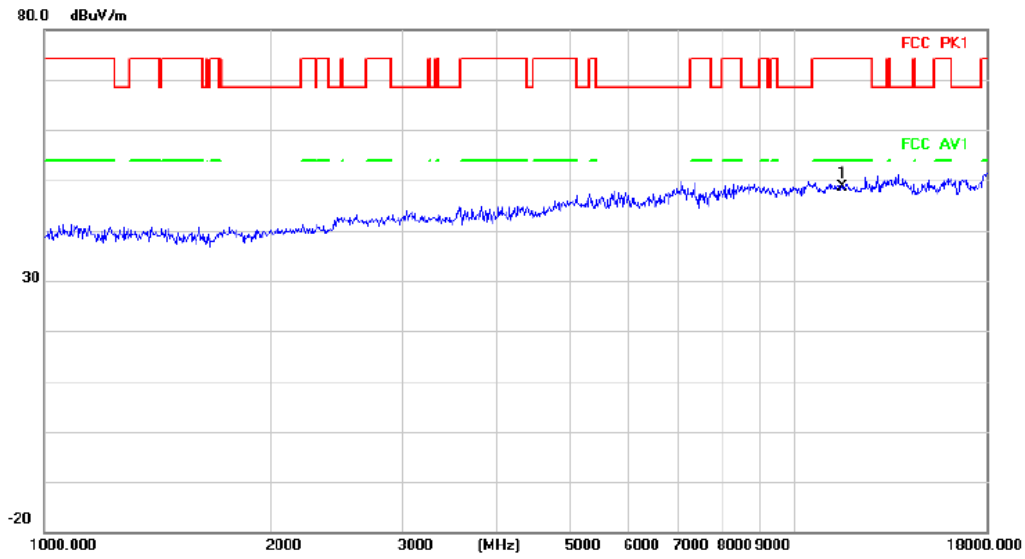

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11590.000	41.17	7.56	48.73	74.00	-25.27	peak		


Radiated Emission

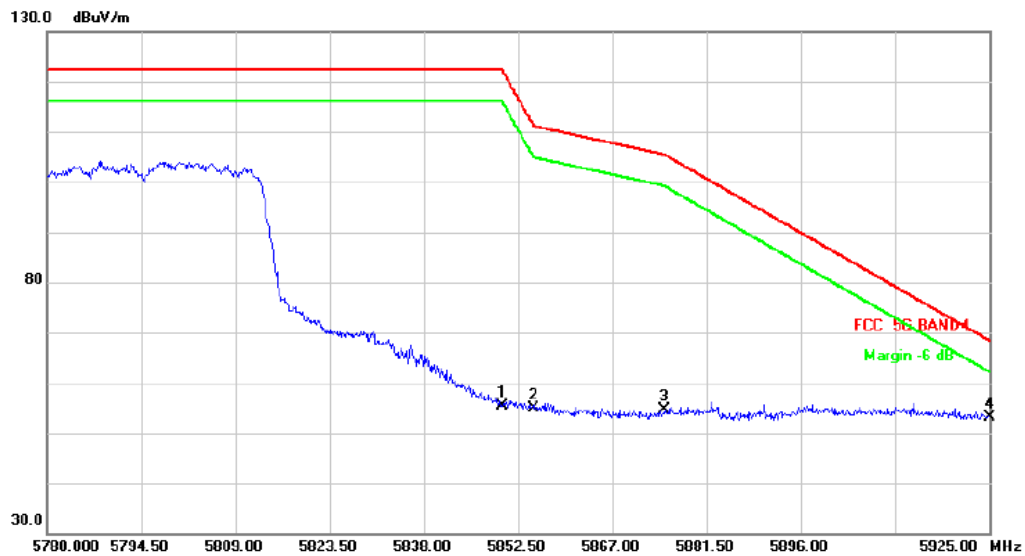

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.000	48.71	6.79	55.50	122.20	-66.70	peak		
2		5855.000	48.04	6.72	54.76	110.80	-56.04	peak		
3		5875.000	48.07	6.46	54.53	105.20	-50.67	peak		
4	*	5925.000	46.59	6.46	53.05	68.20	-15.15	peak		


VERTICAL

Radiated Emission

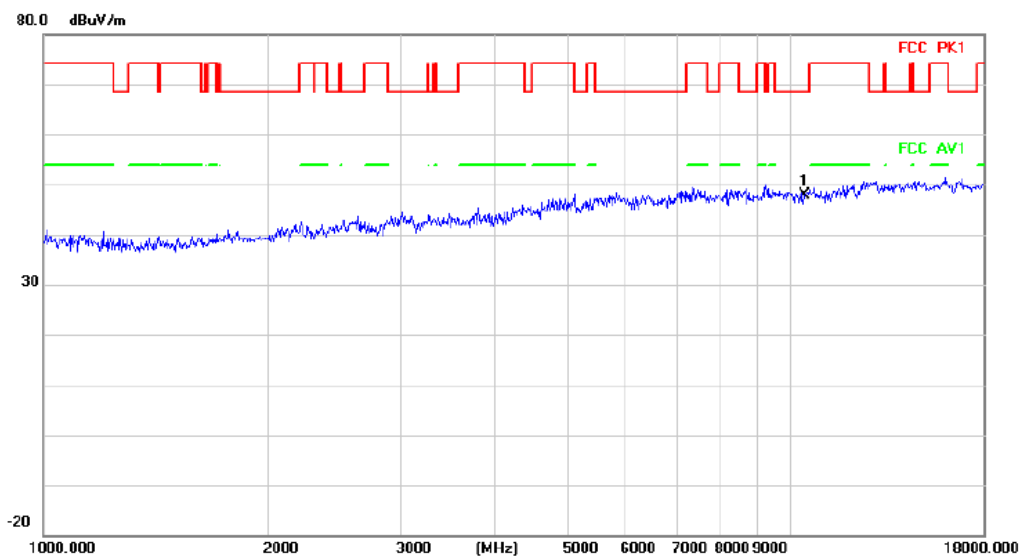

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10360.000	40.67	7.25	47.92	68.20	-20.28	peak		


Radiated Emission

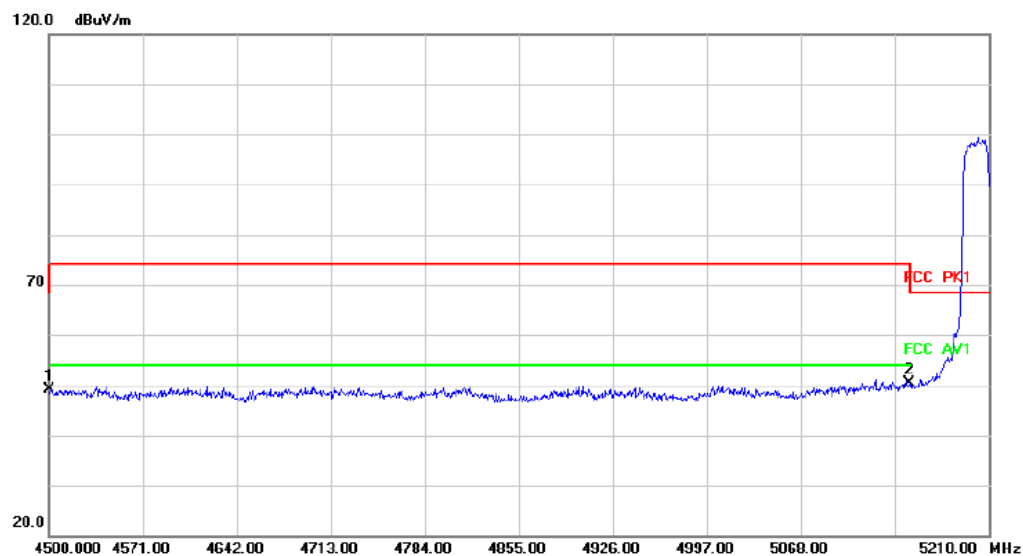

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4500.000	44.57	4.45	49.02	68.20	-19.18	peak		
2	*	5150.000	44.24	6.04	50.28	68.20	-17.92	peak		


HORIZONTAL

Radiated Emission

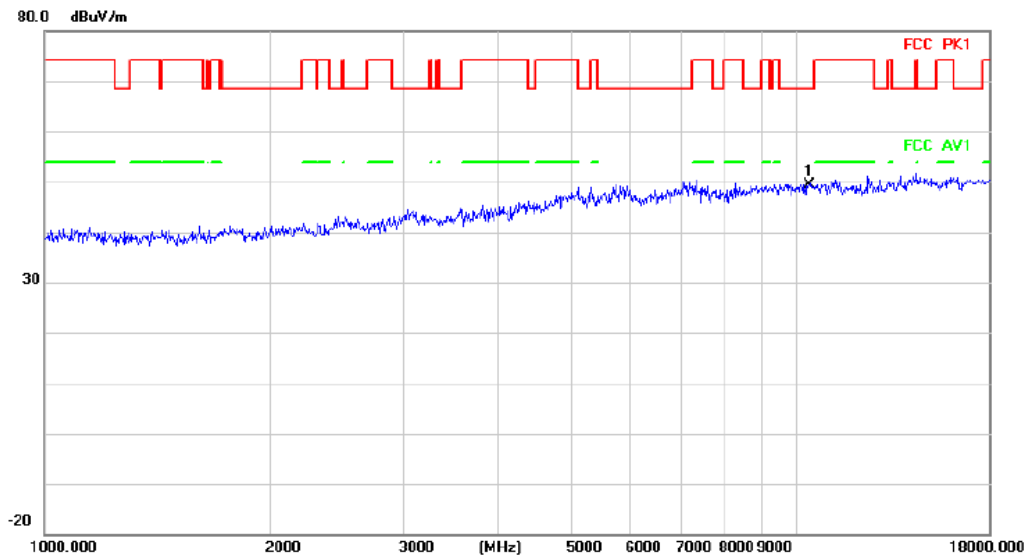

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10360.000	42.04	7.25	49.29	68.20	-18.91	peak		


Radiated Emission

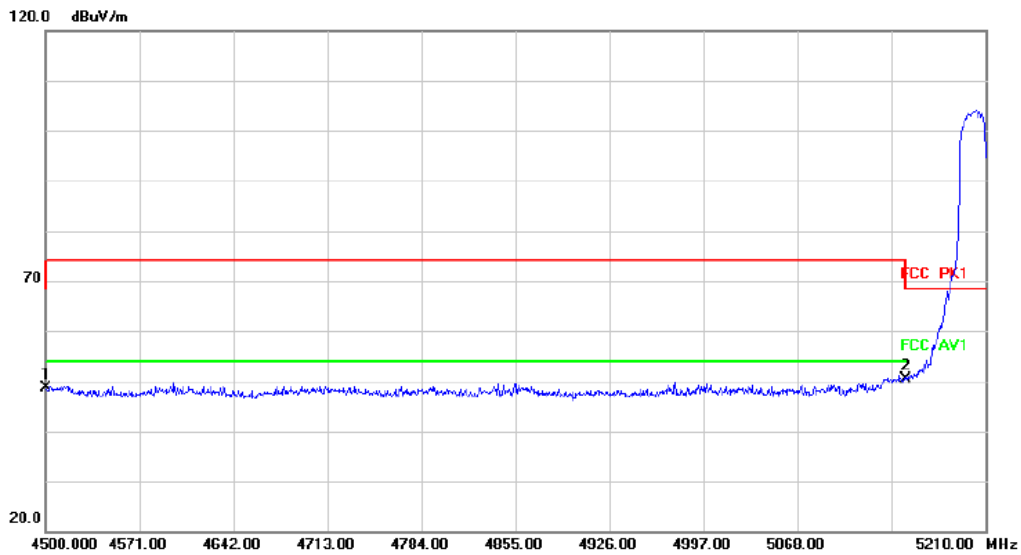

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4500.000	44.07	4.45	48.52	68.20	-19.68	peak		
2	*	5150.000	44.37	6.04	50.41	68.20	-17.79	peak		

VERTICAL


Radiated Emission

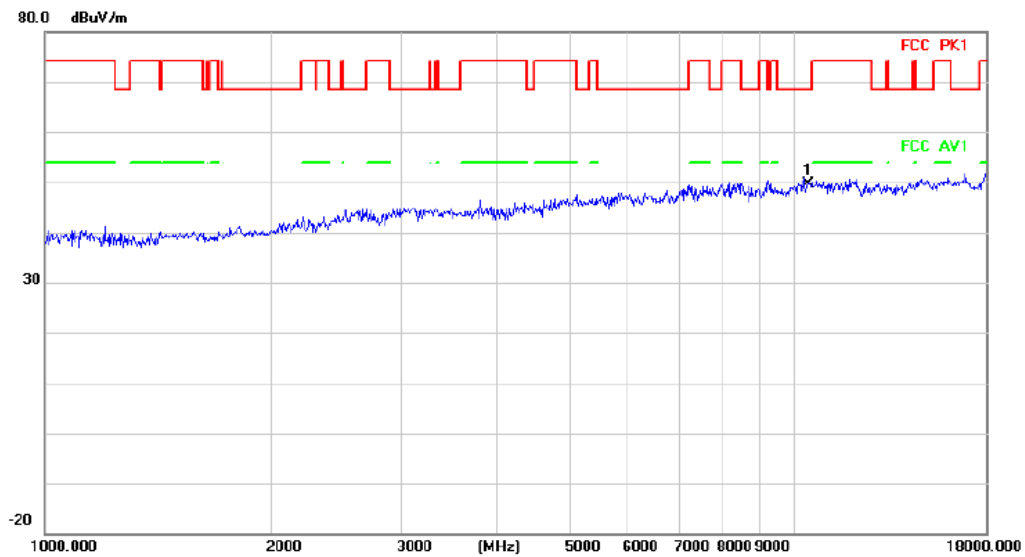

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10400.000	42.13	7.39	49.52	68.20	-18.68	peak		Comment

HORIZONTAL


Radiated Emission

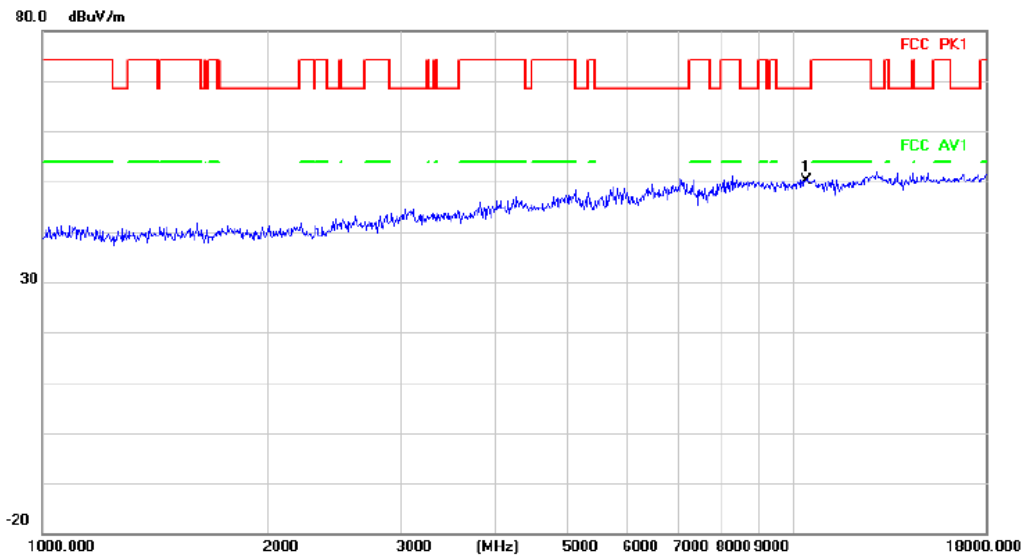

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10400.000	42.82	7.39	50.21	68.20	-17.99	peak		Comment

VERTICAL


Radiated Emission

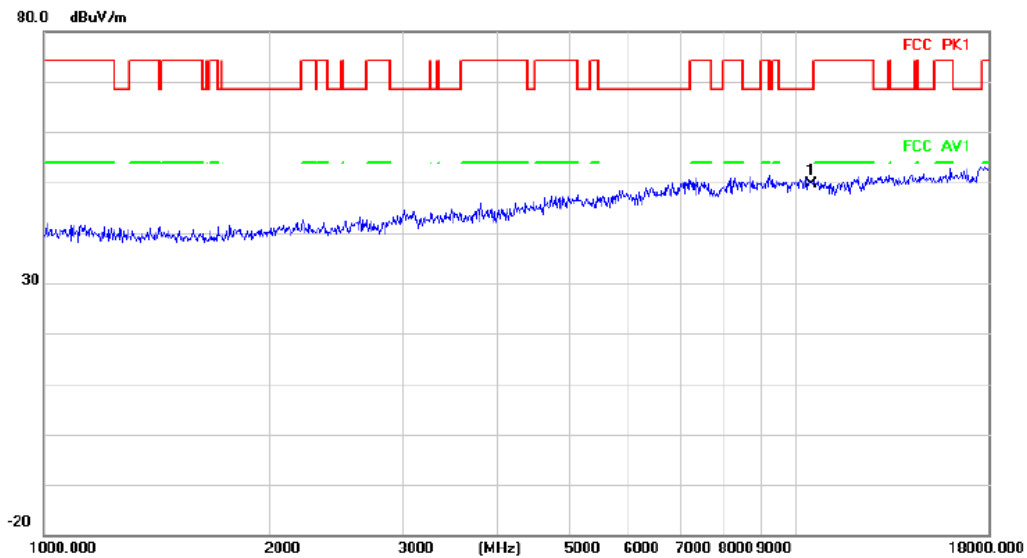

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10480.000	42.00	7.60	49.60	68.20	-18.60	peak		Comment

HORIZONTAL


Radiated Emission

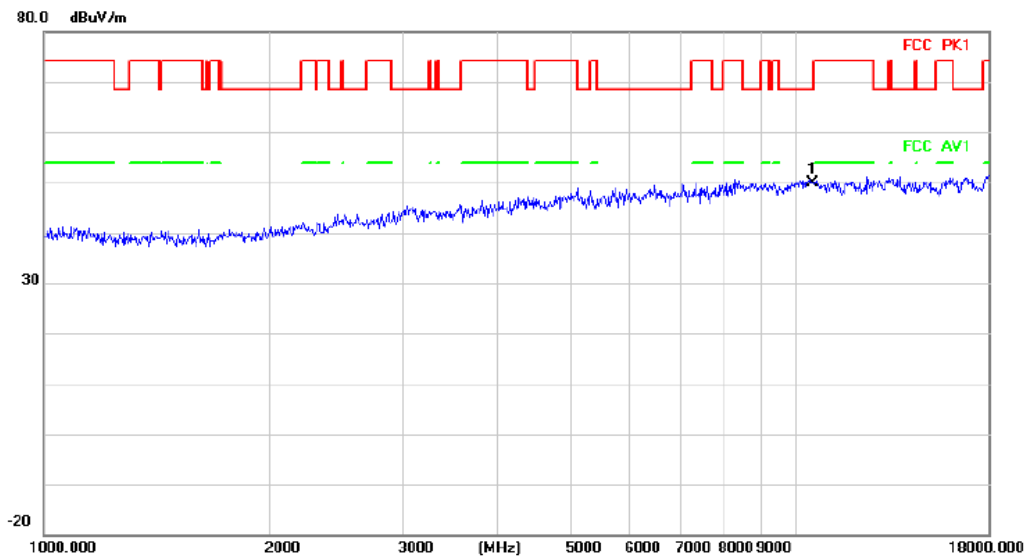

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10480.000	42.34	7.60	49.94	68.20	-18.26	peak		Comment

VERTICAL


Radiated Emission

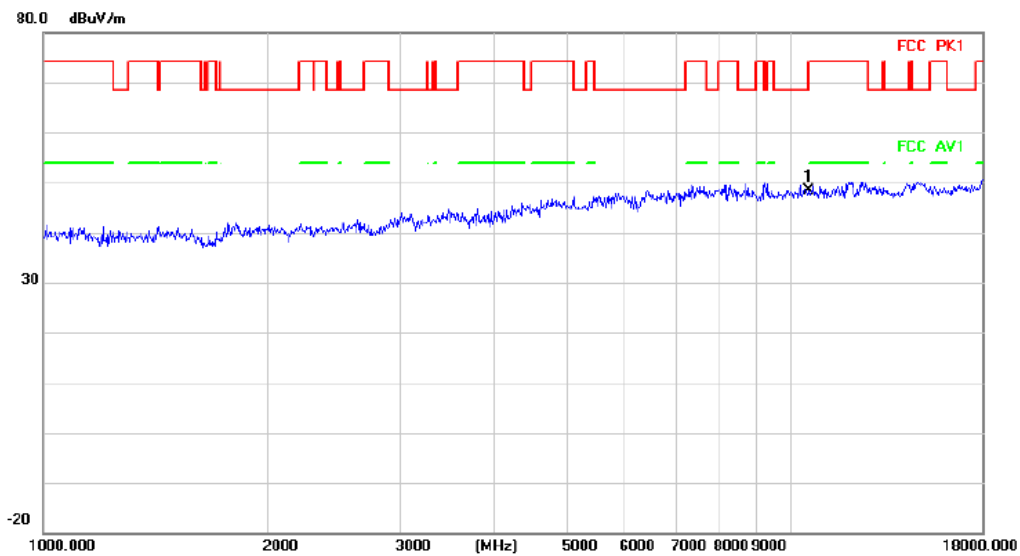

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10520.000	40.64	7.71	48.35	68.20	-19.85	peak		Comment

HORIZONTAL


Radiated Emission

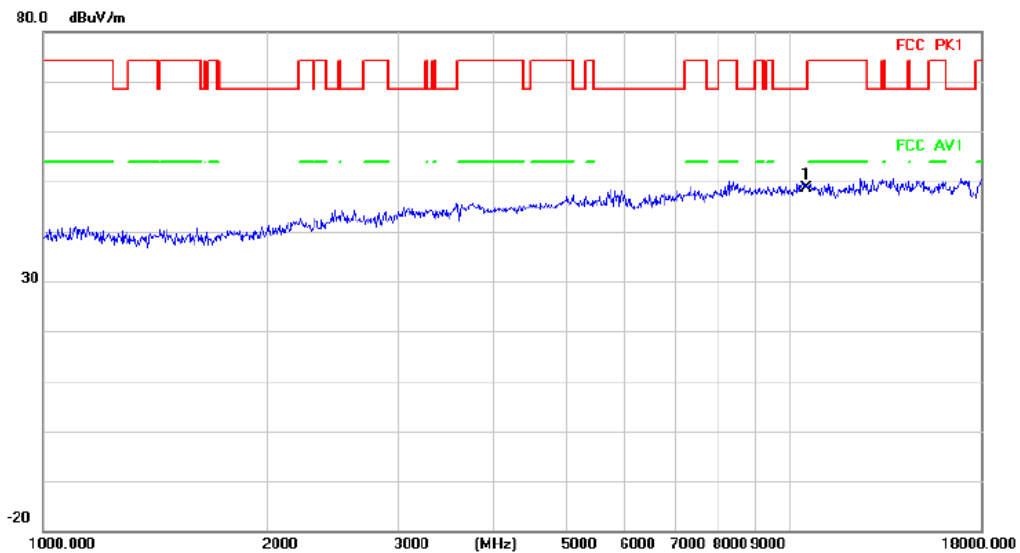

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10520.000	41.01	7.71	48.72	68.20	-19.48	peak		Comment

VERTICAL


Radiated Emission

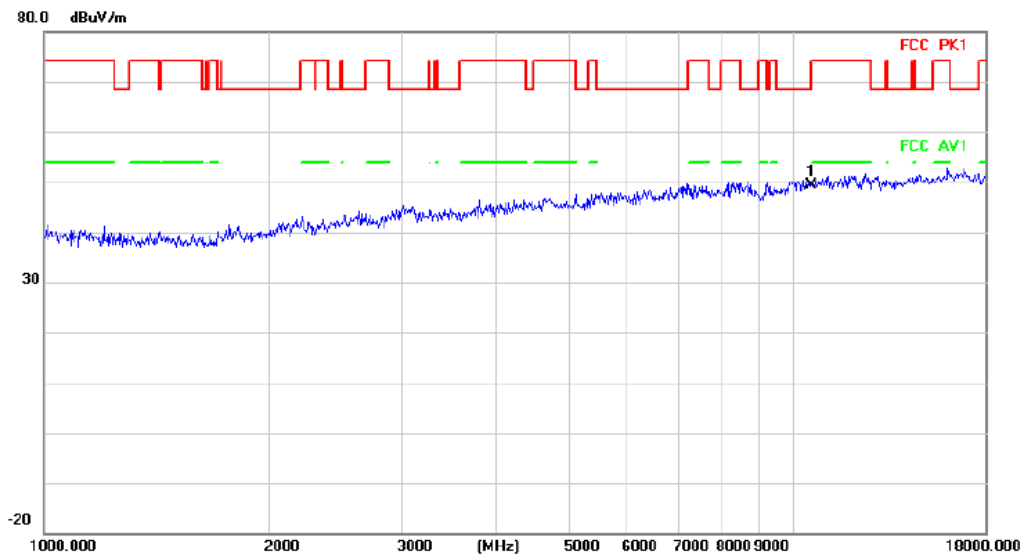

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10560.000	41.63	7.81	49.44	68.20	-18.76	peak		Comment

HORIZONTAL


Radiated Emission

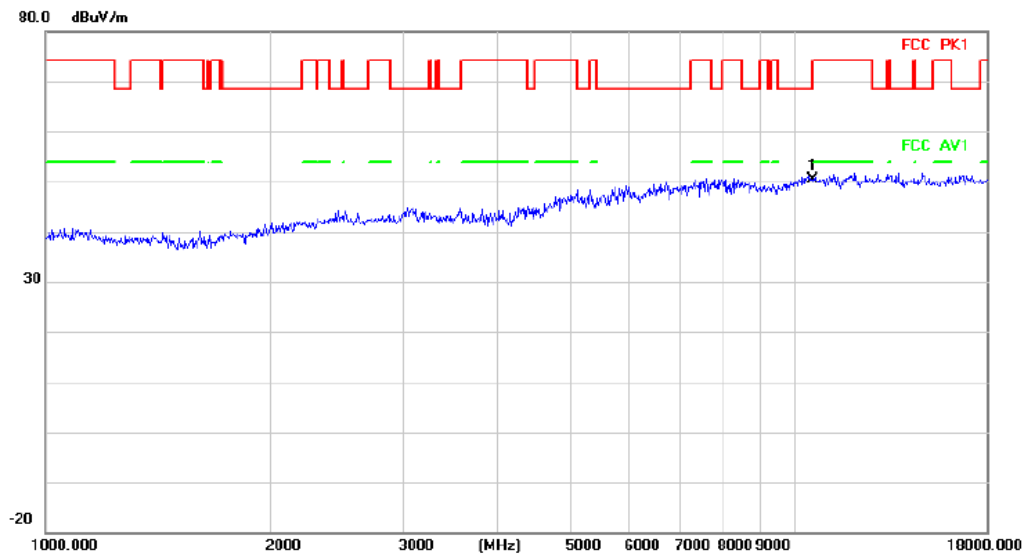

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10560.000	42.52	7.81	50.33	68.20	-17.87	peak		Comment


VERTICAL

Radiated Emission

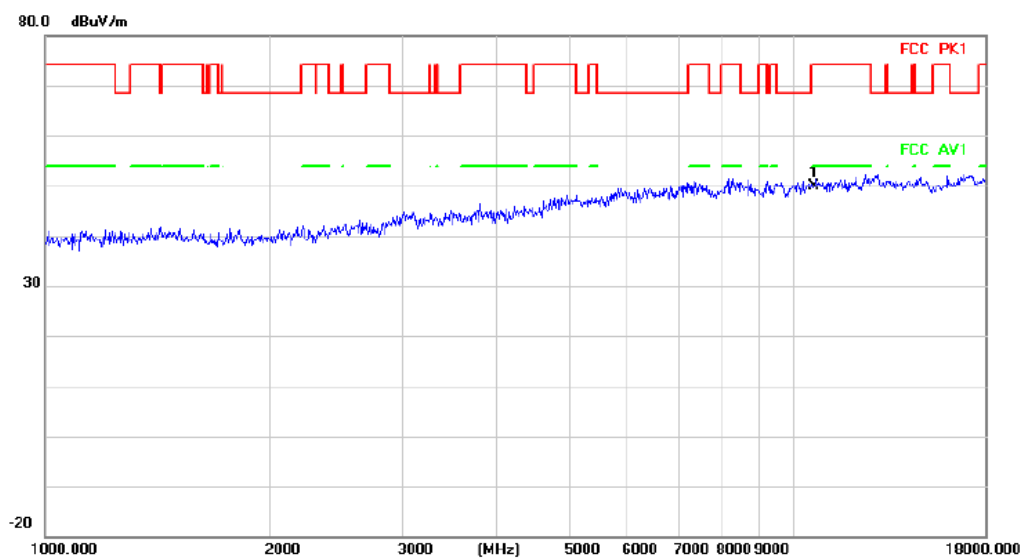

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10640.000	42.01	7.87	49.88	74.00	-24.12	peak		Comment


Radiated Emission

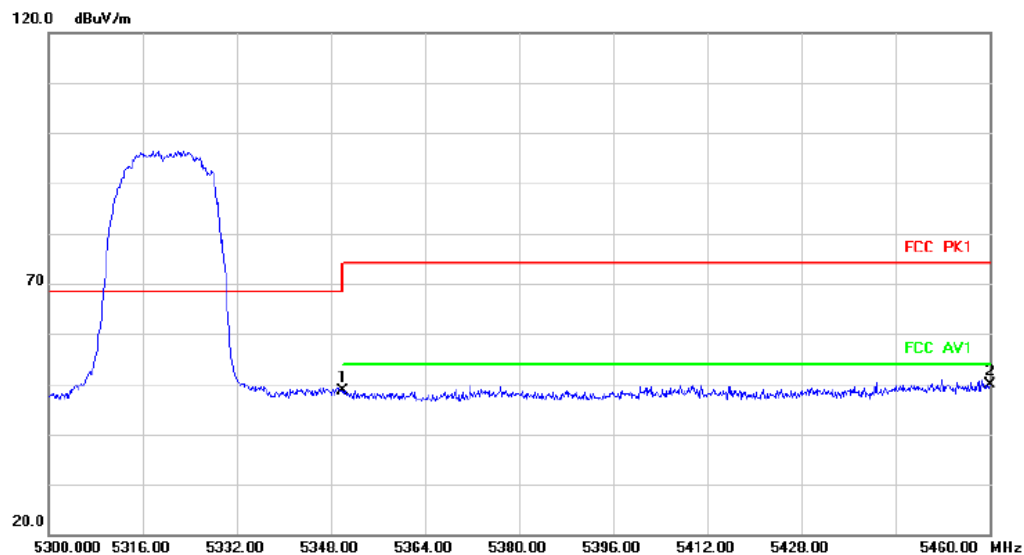

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5350.000	43.44	5.25	48.69	68.20	-19.51	peak		Comment
2	*	5460.000	44.74	5.03	49.77	68.20	-18.43	peak		Comment


HORIZONTAL

Radiated Emission

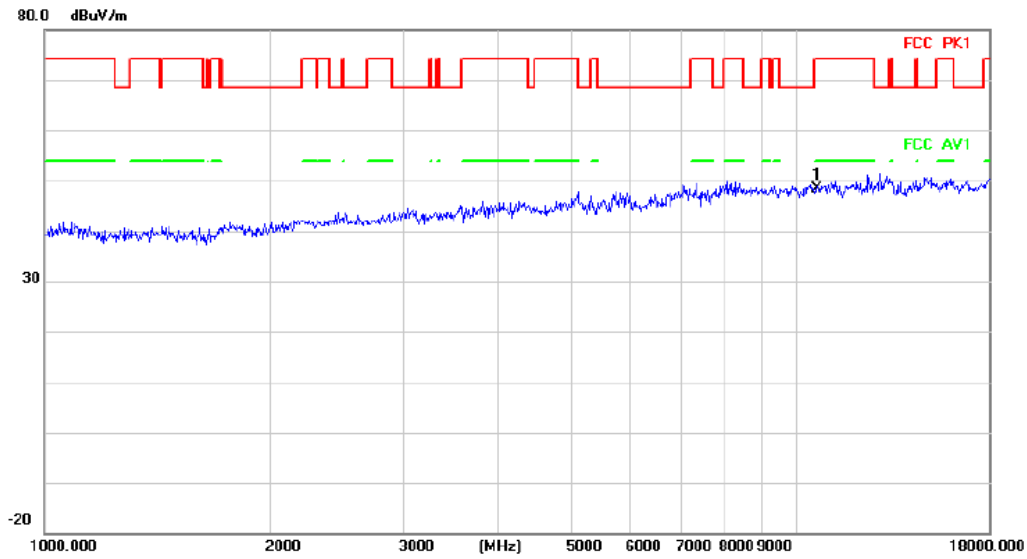

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10640.000	40.61	7.87	48.48	74.00	-25.52	peak		


Radiated Emission

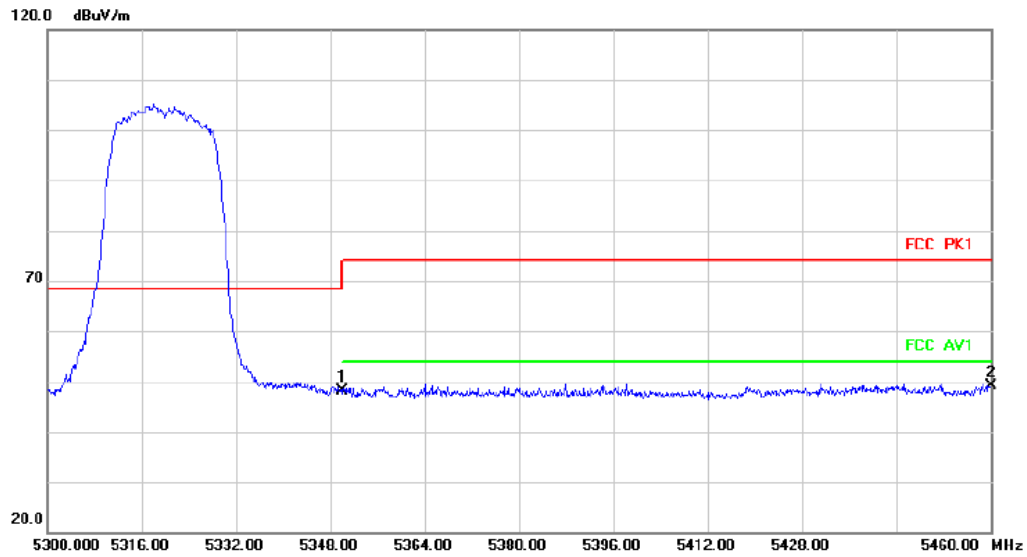

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5350.000	42.90	5.25	48.15	68.20	-20.05	peak		
2	*	5460.000	44.16	5.03	49.19	68.20	-19.01	peak		


VERTICAL

Radiated Emission

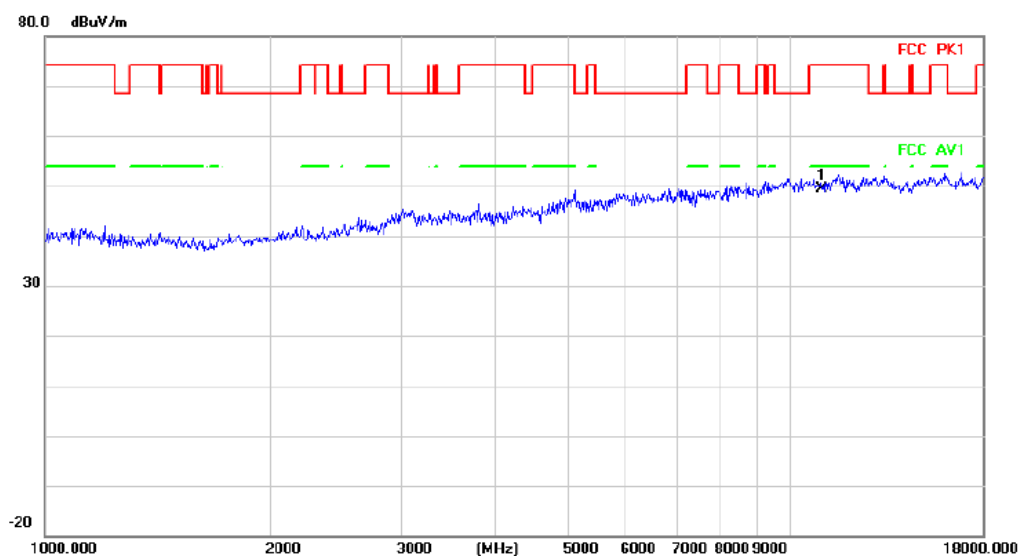

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11000.000	41.95	7.38	49.33	74.00	-24.67	peak		Comment


Radiated Emission

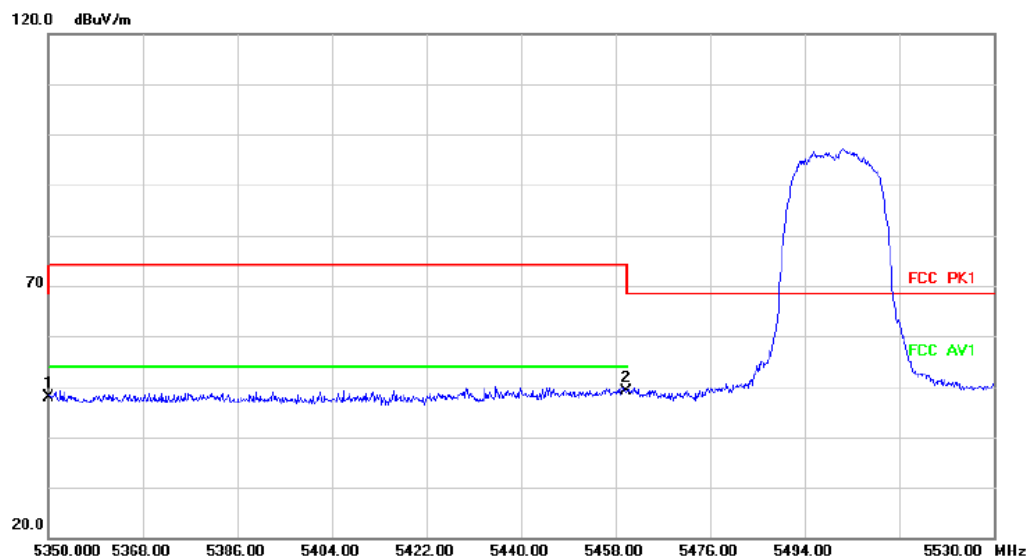

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5350.000	42.66	5.25	47.91	68.20	-20.29	peak		Comment
2	*	5460.000	44.04	5.03	49.07	68.20	-19.13	peak		Comment


HORIZONTAL

Radiated Emission

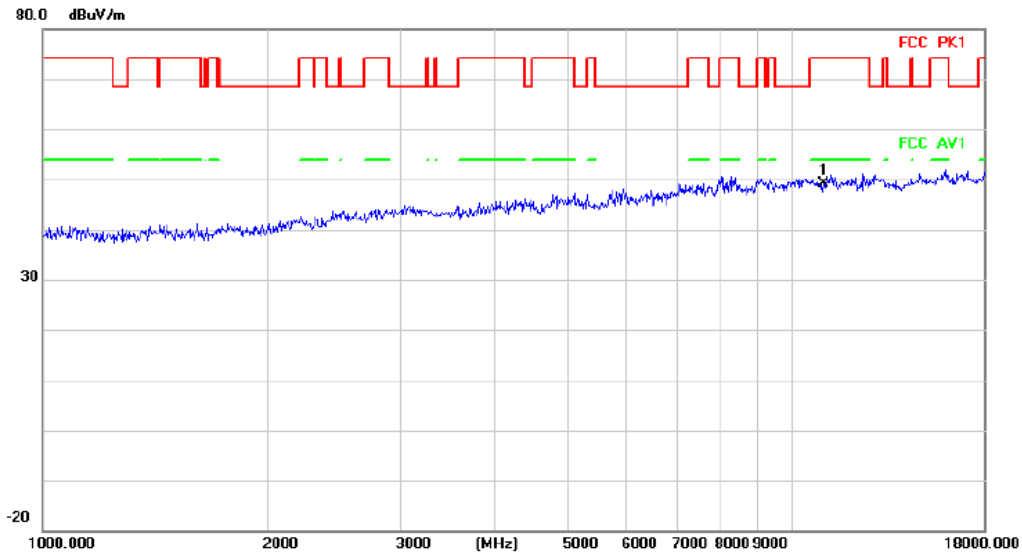

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11000.000	41.84	7.38	49.22	74.00	-24.78	peak	


Radiated Emission

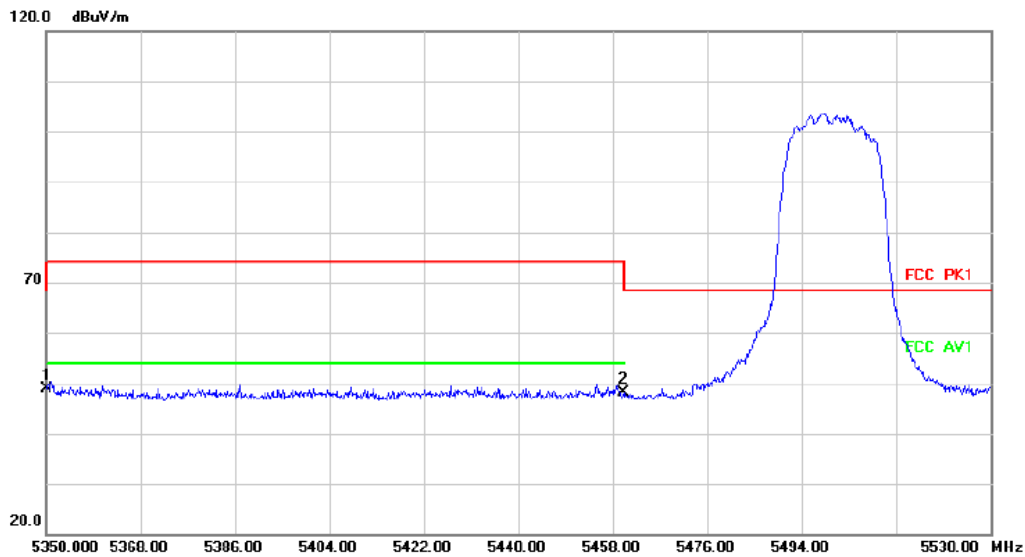

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	5350.000	43.54	5.25	48.79	68.20	-19.41	peak	
2		5460.000	43.02	5.03	48.05	68.20	-20.15	peak	

VERTICAL


Radiated Emission

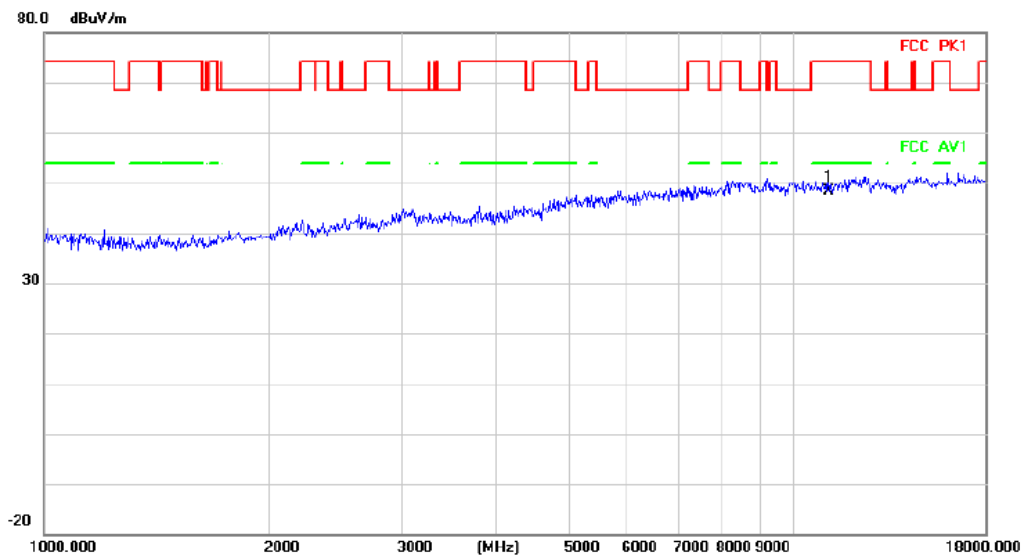

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11160.000	40.94	7.54	48.48	74.00	-25.52	peak	

HORIZONTAL


Radiated Emission

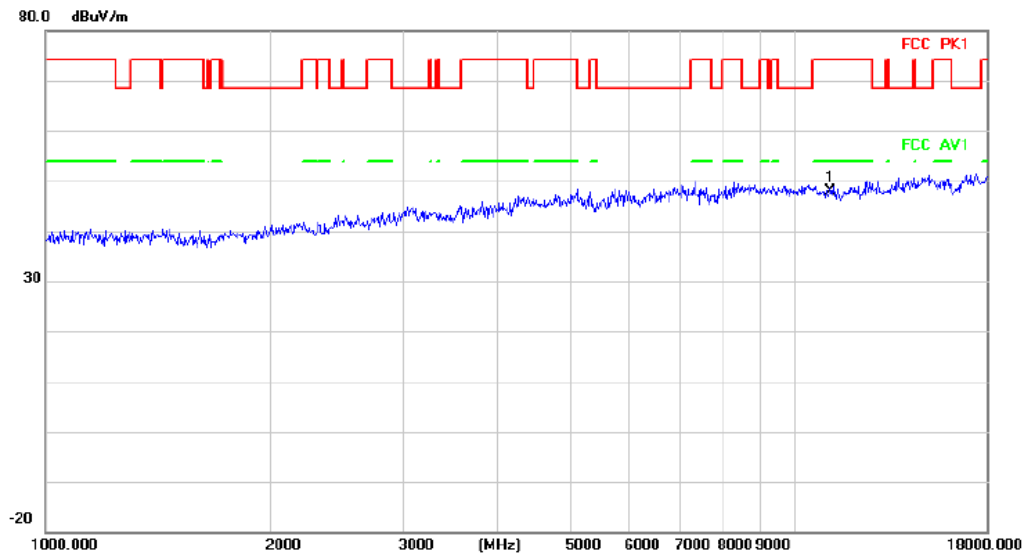

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11160.000	40.23	7.54	47.77	74.00	-26.23	peak	

VERTICAL


Radiated Emission

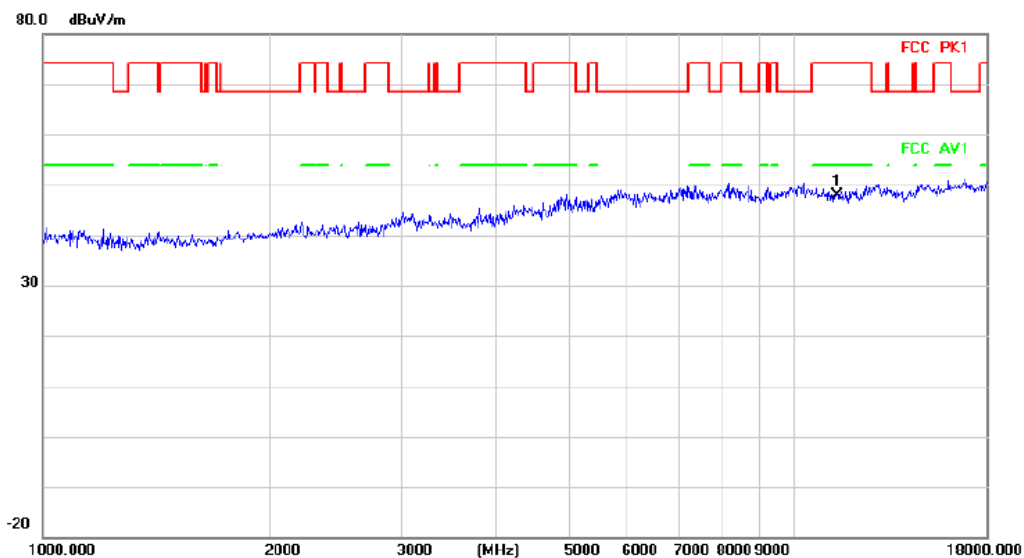

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11400.000	40.26	7.54	47.80	74.00	-26.20	peak		Comment

HORIZONTAL


Radiated Emission

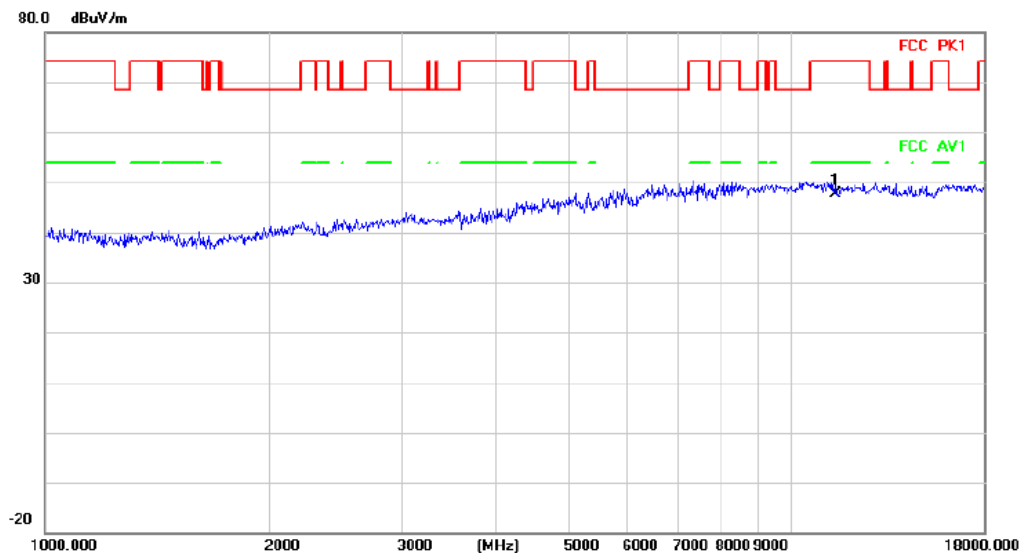

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11400.000	40.02	7.54	47.56	74.00	-26.44	peak		Comment


VERTICAL

Radiated Emission

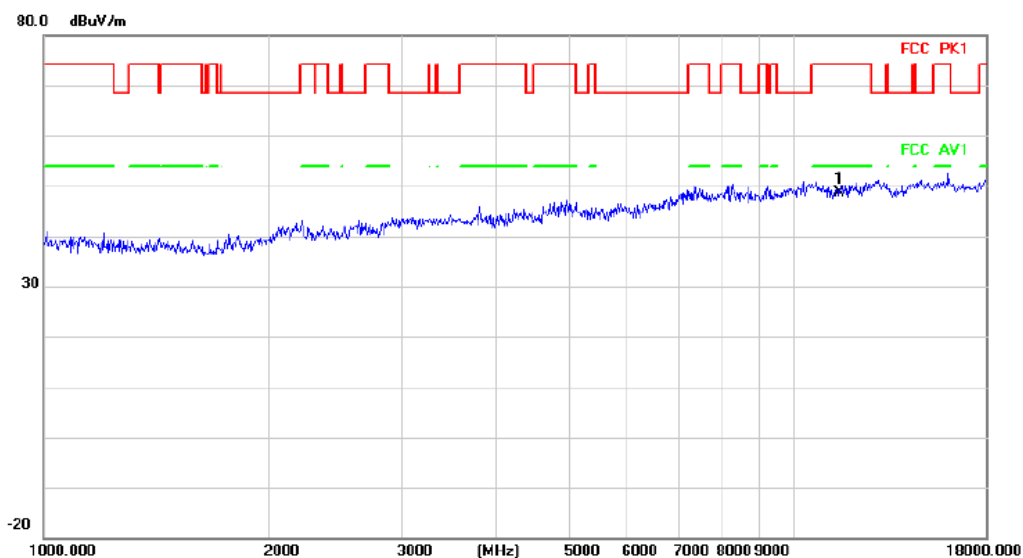

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11490.000	40.86	7.76	48.62	74.00	-25.38	peak		


Radiated Emission

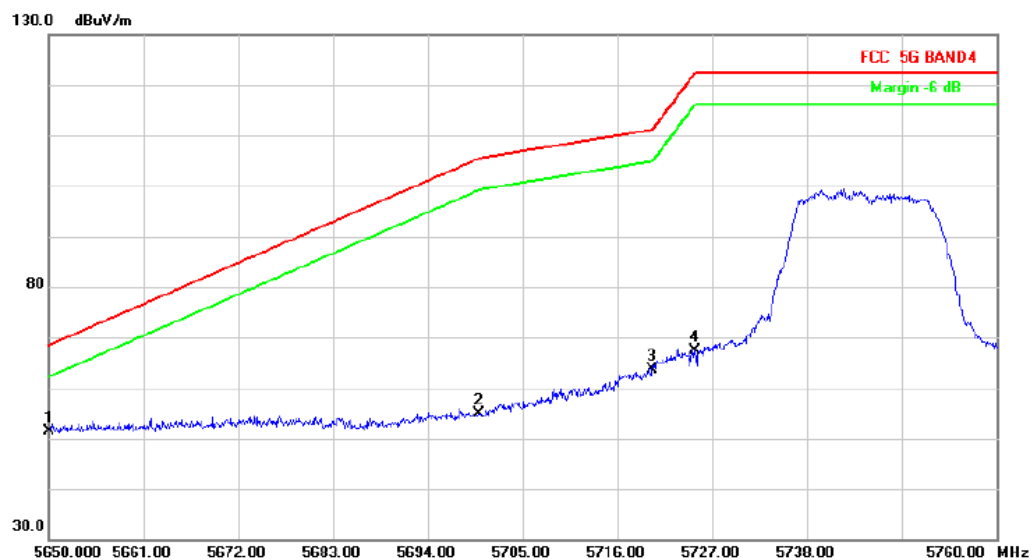

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5650.000	45.55	5.72	51.27	68.20	-16.93	peak		
2		5700.000	48.89	6.00	54.89	105.20	-50.31	peak		
3		5720.000	57.74	5.82	63.56	110.80	-47.24	peak		
4		5725.000	61.61	5.78	67.39	122.20	-54.81	peak		


HORIZONTAL

Radiated Emission

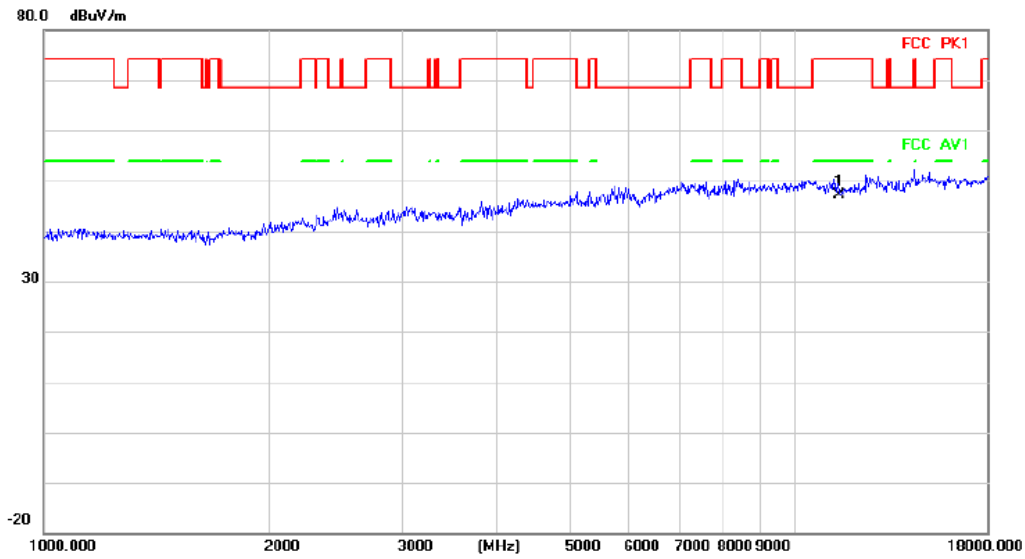

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11490.000	39.28	7.76	47.04	74.00	-26.96	peak	


Radiated Emission

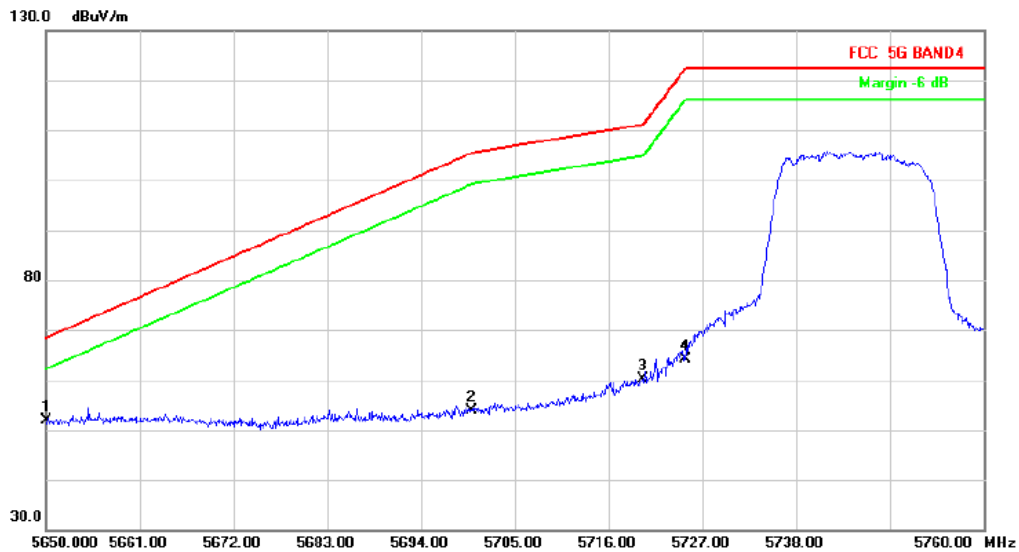

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	5650.000	46.07	5.72	51.79	68.20	-16.41	peak	
2		5700.000	47.82	6.00	53.82	105.20	-51.38	peak	
3		5720.000	54.20	5.82	60.02	110.80	-50.78	peak	
4		5725.000	58.39	5.78	64.17	122.20	-58.03	peak	

VERTICAL


Radiated Emission

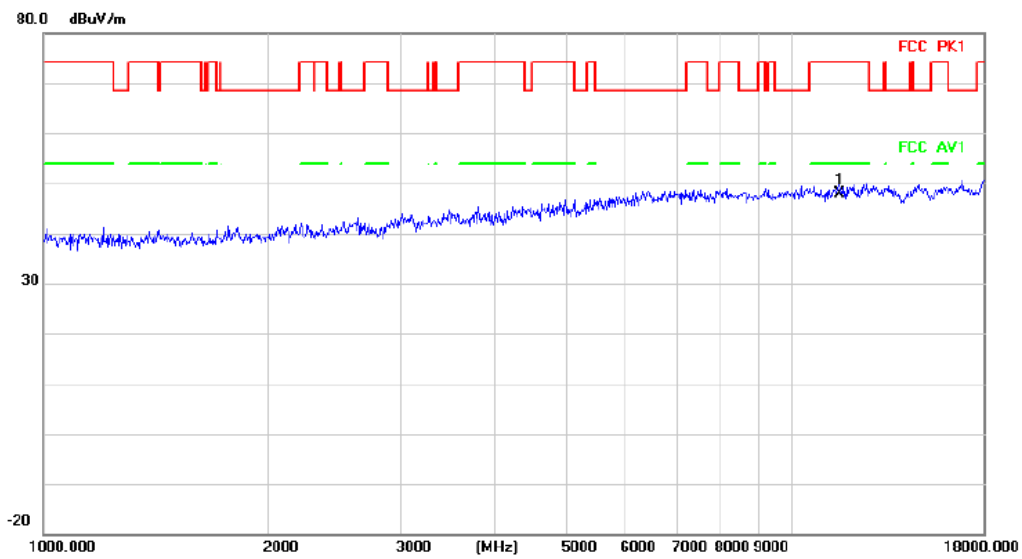

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11570.000	40.37	7.60	47.97	74.00	-26.03	peak		Comment

HORIZONTAL


Radiated Emission

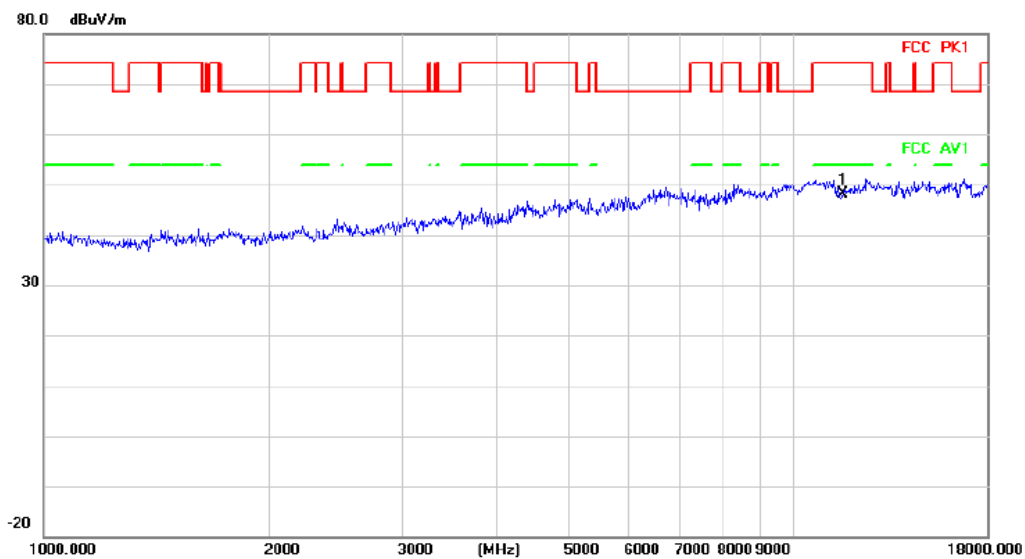

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11570.000	40.63	7.60	48.23	74.00	-25.77	peak		Comment


VERTICAL

Radiated Emission

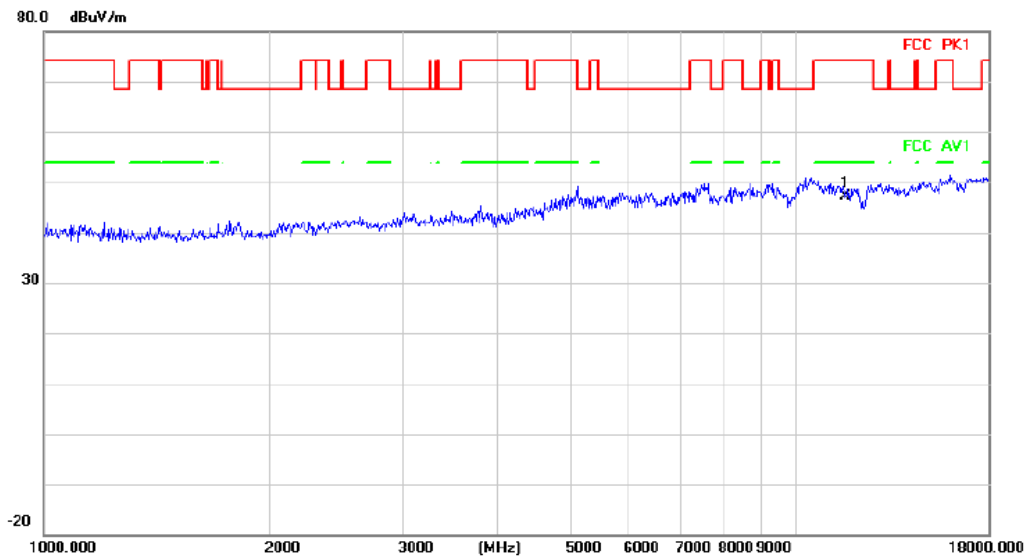

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11650.000	39.78	7.45	47.23	74.00	-26.77	peak		


Radiated Emission

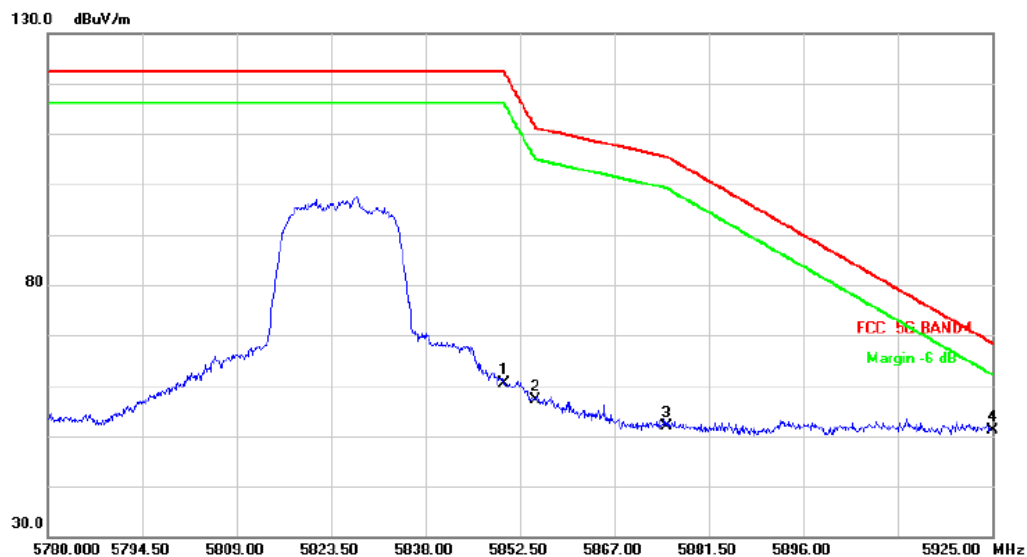

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5850.000	53.71	6.79	60.50	122.20	-61.70	peak		
2		5855.000	50.33	6.72	57.05	110.80	-53.75	peak		
3		5875.000	45.48	6.46	51.94	105.20	-53.26	peak		
4	*	5925.000	44.74	6.46	51.20	68.20	-17.00	peak		


HORIZONTAL

Radiated Emission

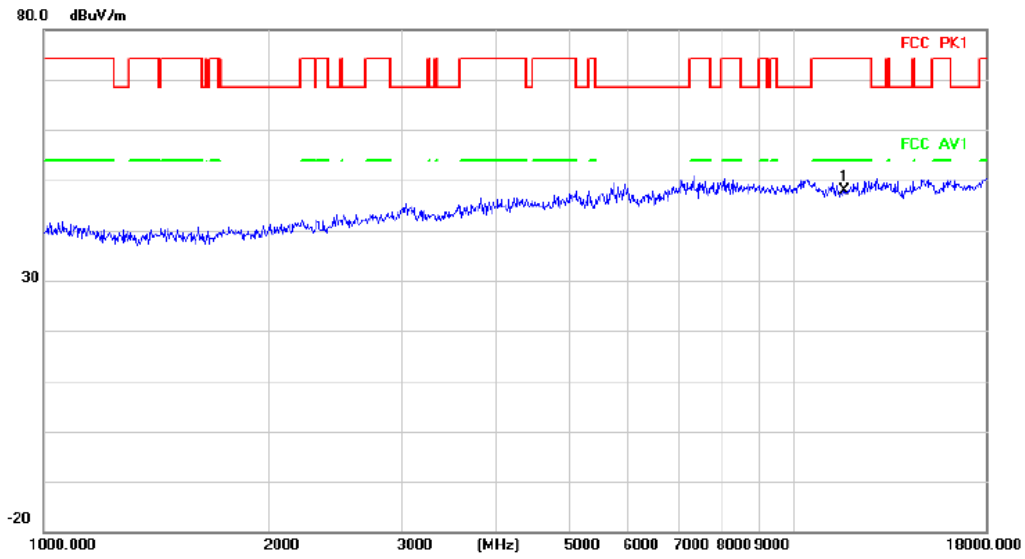

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11650.000	40.53	7.45	47.98	74.00	-26.02	peak	


Radiated Emission

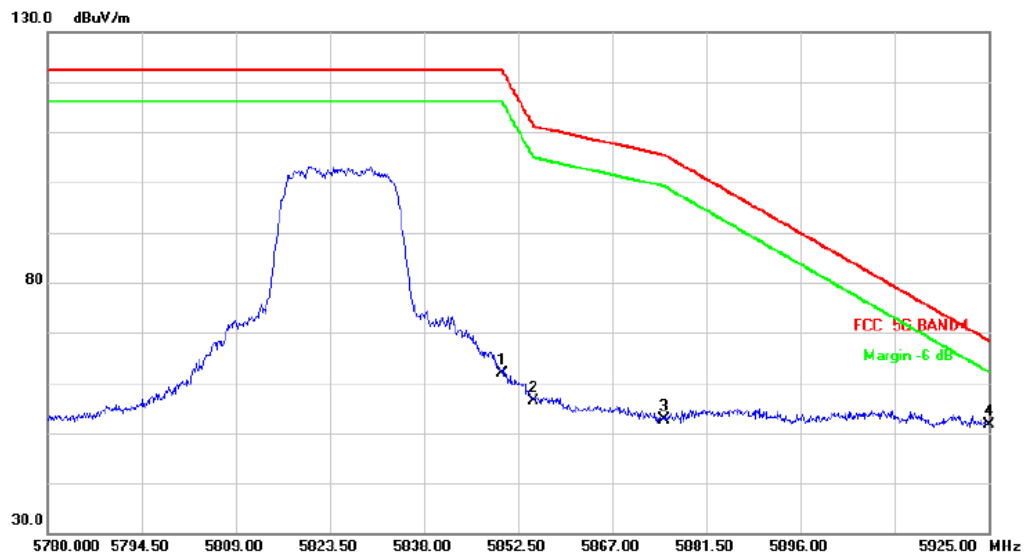

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		5850.000	55.02	6.79	61.81	122.20	-60.39	peak	
2		5855.000	49.59	6.72	56.31	110.80	-54.49	peak	
3		5875.000	46.06	6.46	52.52	105.20	-52.68	peak	
4	*	5925.000	45.05	6.46	51.51	68.20	-16.69	peak	


VERTICAL

Radiated Emission

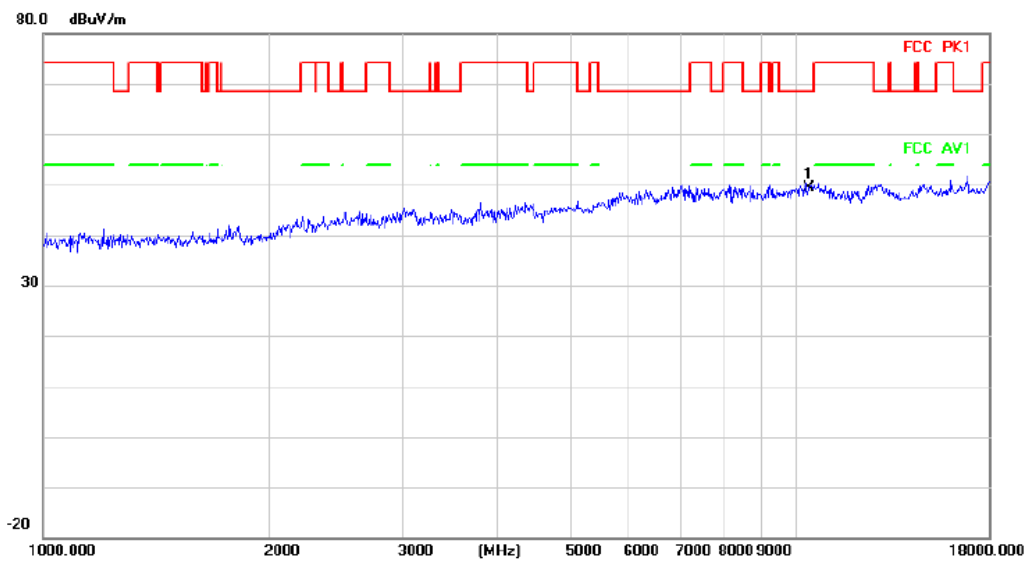

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	10380.000	42.10	7.32	49.42	68.20	-18.78	peak	


Radiated Emission

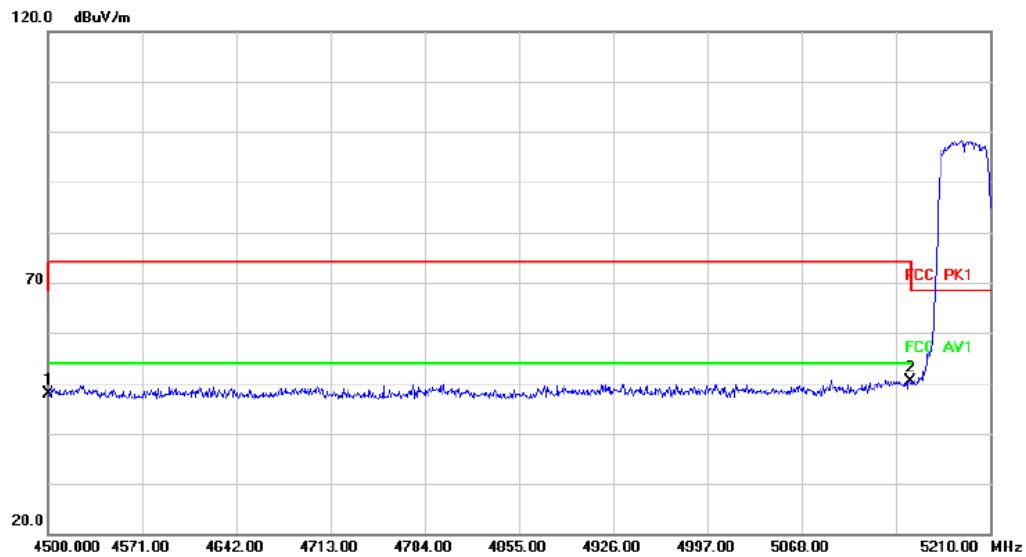

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		4500.000	43.50	4.45	47.95	68.20	-20.25	peak	
2	*	5150.000	44.26	6.04	50.30	68.20	-17.90	peak	


HORIZONTAL

Radiated Emission

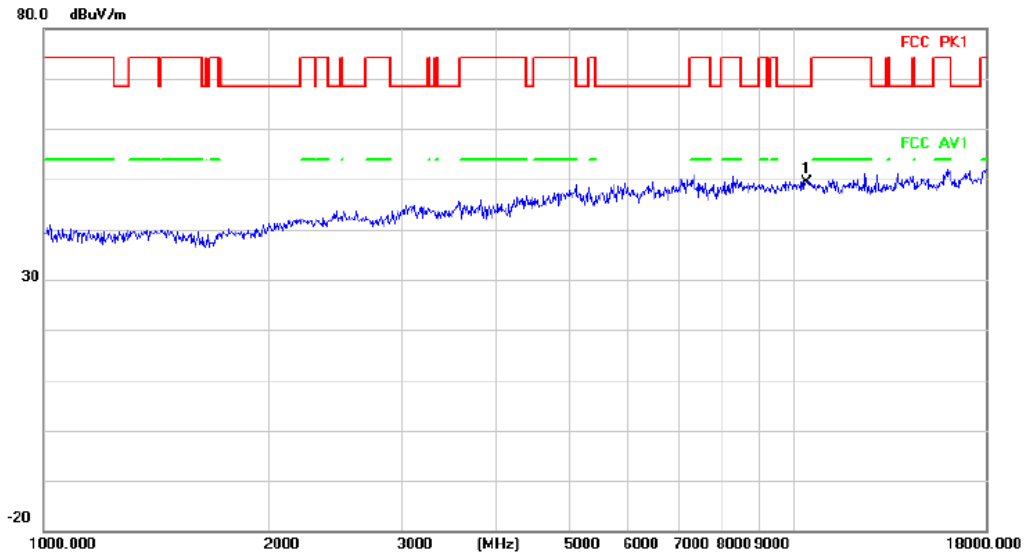

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	10380.000	41.97	7.32	49.29	68.20	-18.91	peak	


Radiated Emission

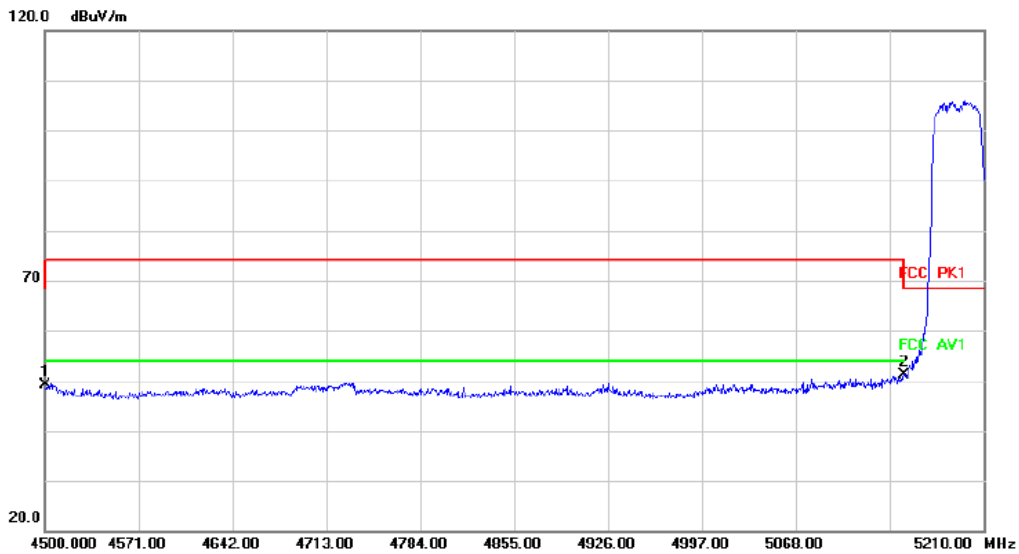

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		4500.000	44.58	4.45	49.03	68.20	-19.17	peak	
2	*	5150.000	45.17	6.04	51.21	68.20	-16.99	peak	

VERTICAL


Radiated Emission

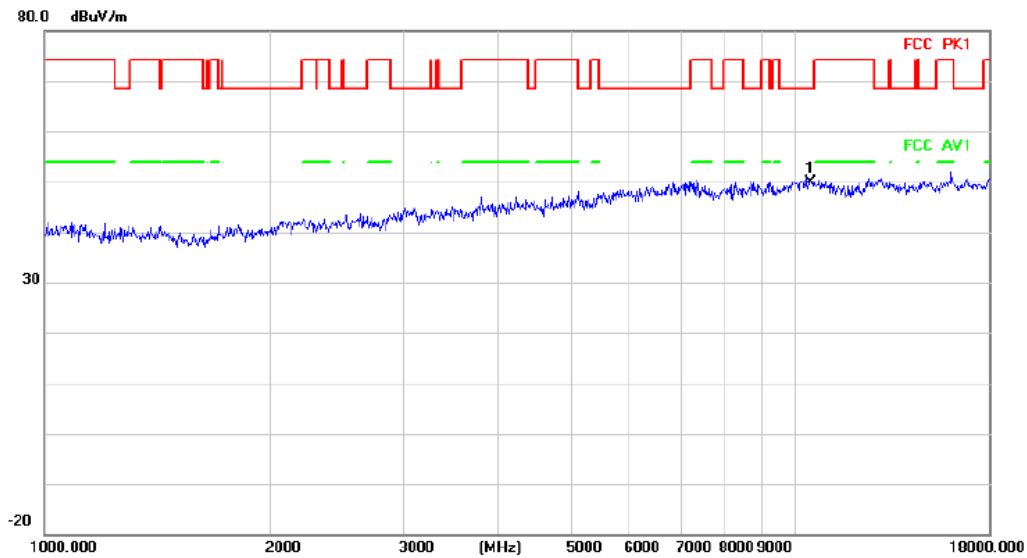

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10460.000	42.25	7.55	49.80	68.20	-18.40	peak		Comment

HORIZONTAL


Radiated Emission

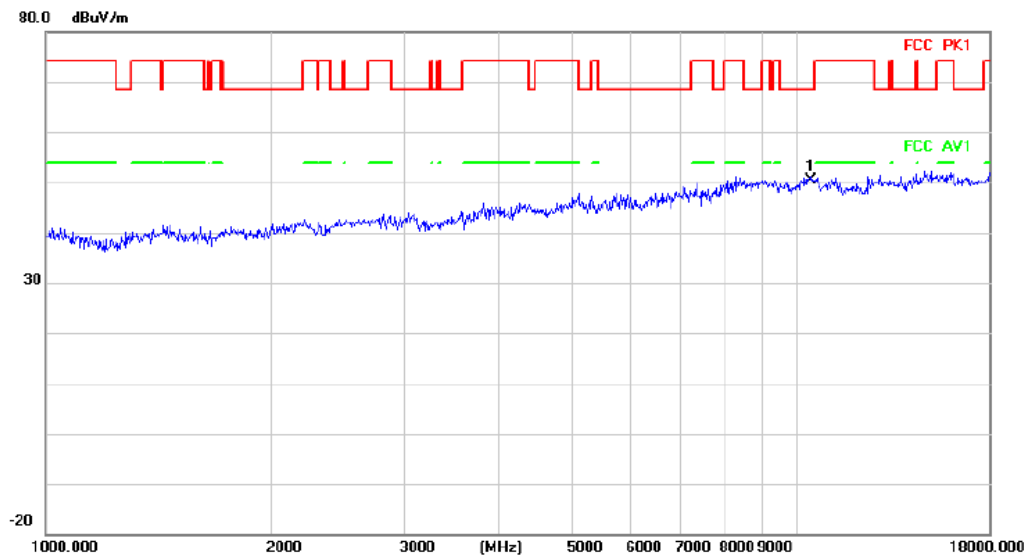

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10460.000	42.77	7.55	50.32	68.20	-17.88	peak		Comment

VERTICAL


Radiated Emission

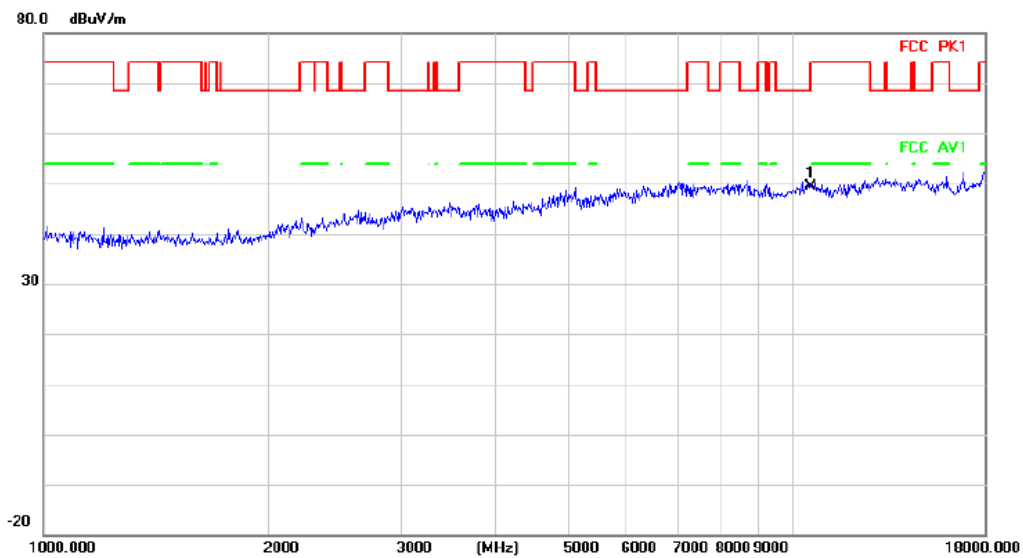

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10540.000	41.68	7.76	49.44	68.20	-18.76	peak		Comment

HORIZONTAL


Radiated Emission

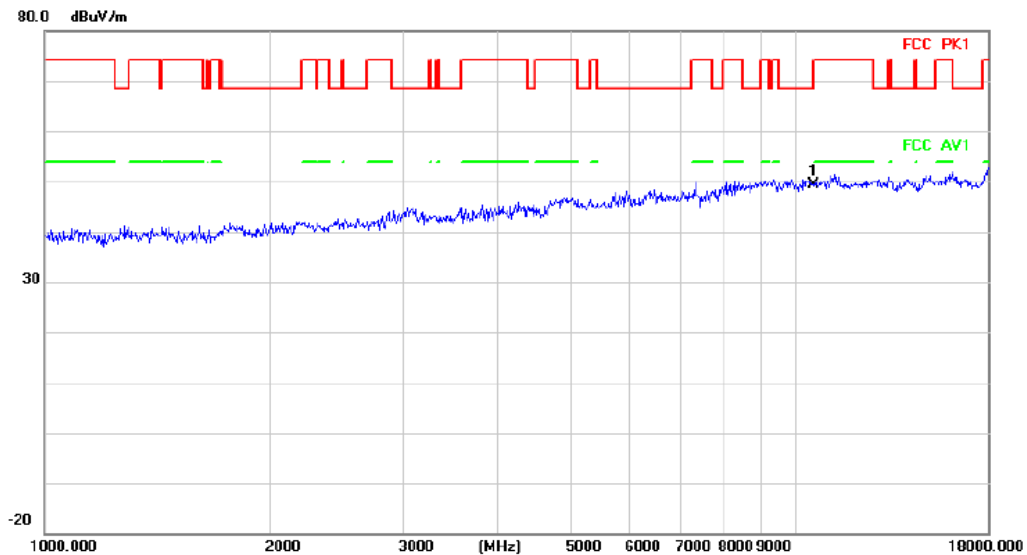

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10540.000	41.57	7.76	49.33	68.20	-18.87	peak		Comment


VERTICAL

Radiated Emission

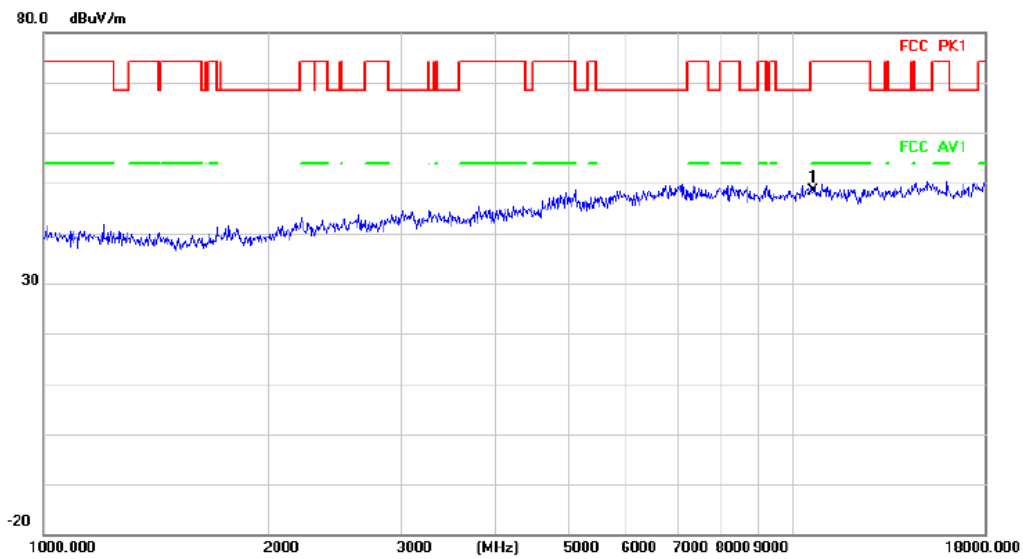

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10620.000	40.51	7.89	48.40	74.00	-25.60	peak		Comment


Radiated Emission

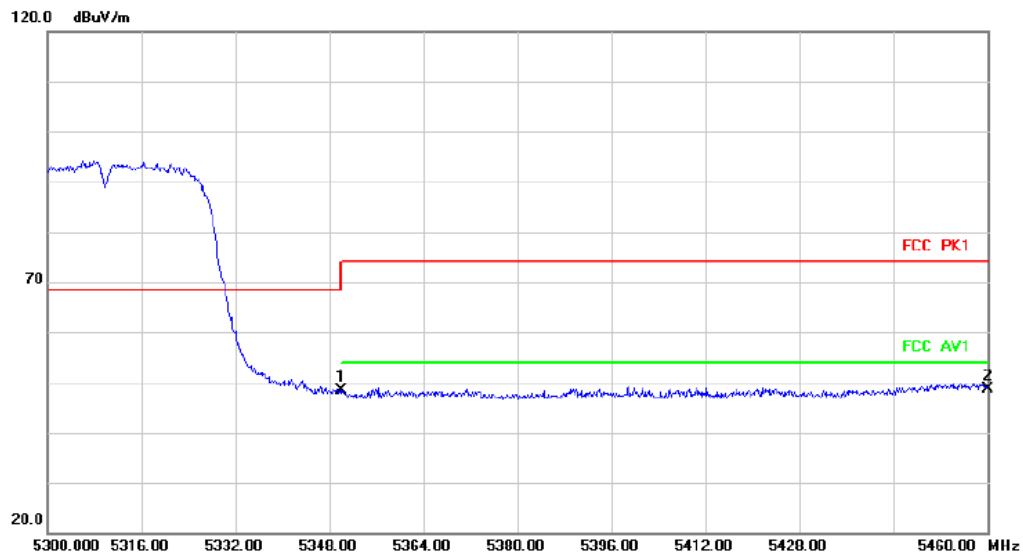

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5350.000	43.02	5.25	48.27	68.20	-19.93	peak		Comment
2	*	5460.000	43.51	5.03	48.54	68.20	-19.66	peak		Comment


HORIZONTAL

Radiated Emission

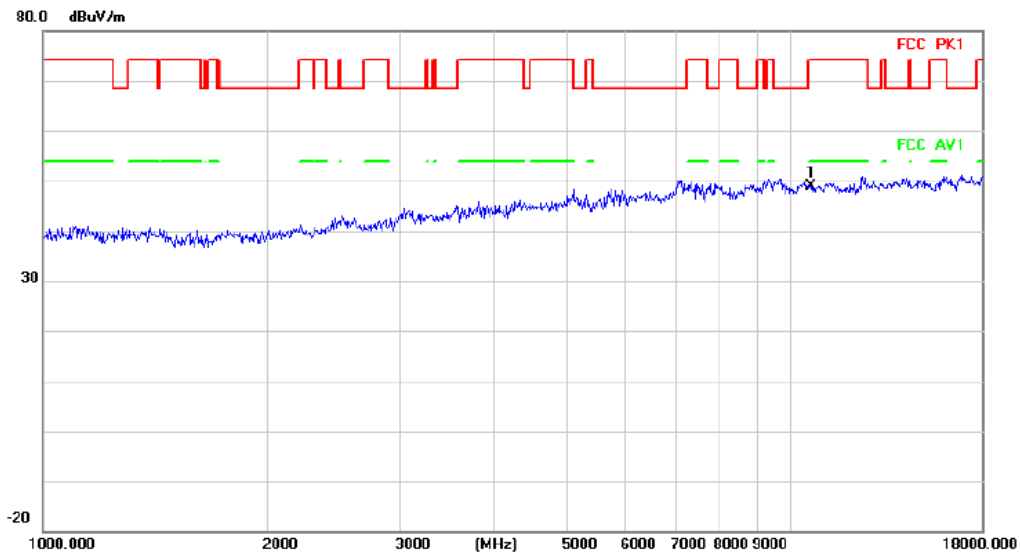

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10620.000	40.93	7.89	48.82	74.00	-25.18	peak		


Radiated Emission

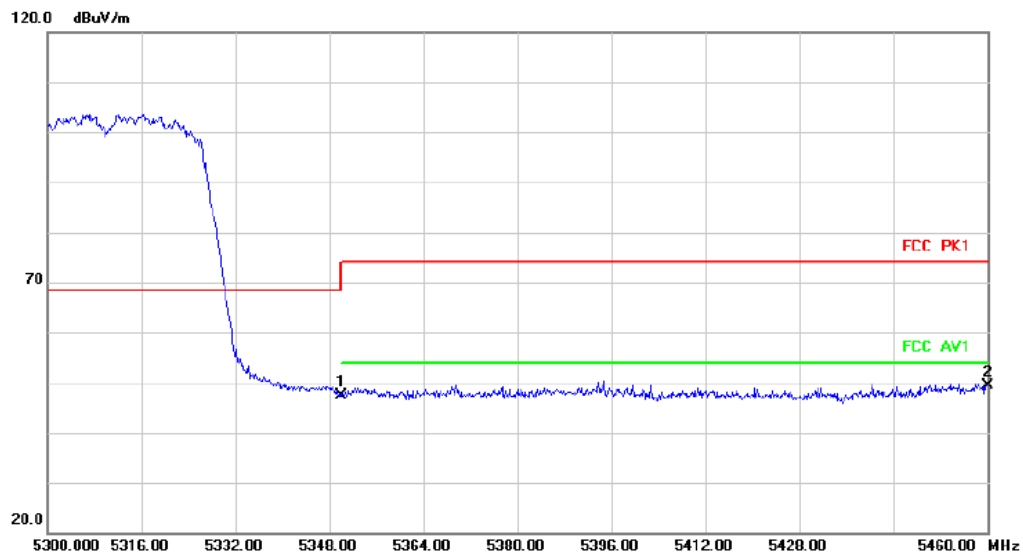

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5350.000	42.16	5.25	47.41	68.20	-20.79	peak		
2	*	5460.000	44.36	5.03	49.39	68.20	-18.81	peak		


VERTICAL

Radiated Emission

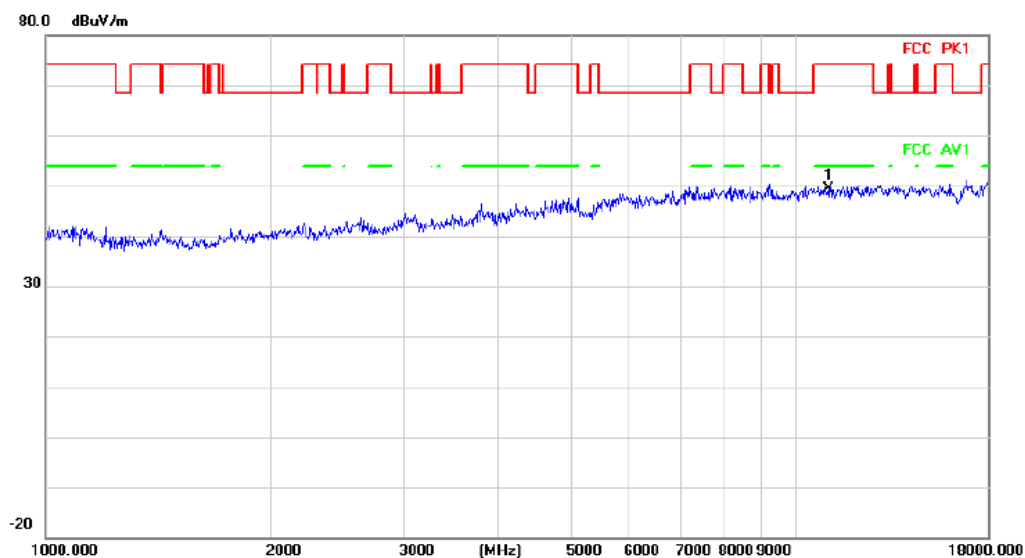

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11020.000	41.85	7.42	49.27	74.00	-24.73	peak		


Radiated Emission

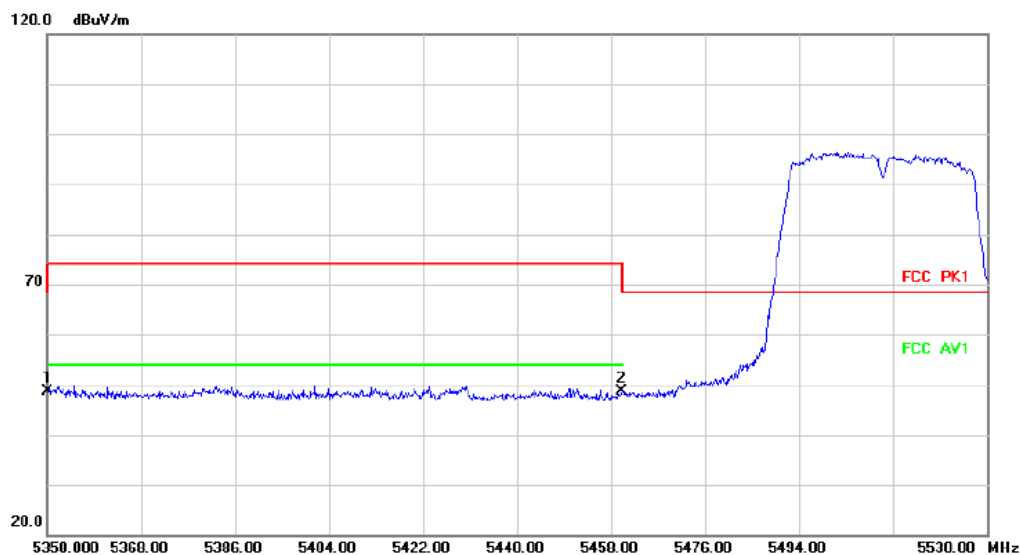


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5350.000	43.44	5.25	48.69	68.20	-19.51	peak		
2		5460.000	43.62	5.03	48.65	68.20	-19.55	peak		

HORIZONTAL

Radiated Emission

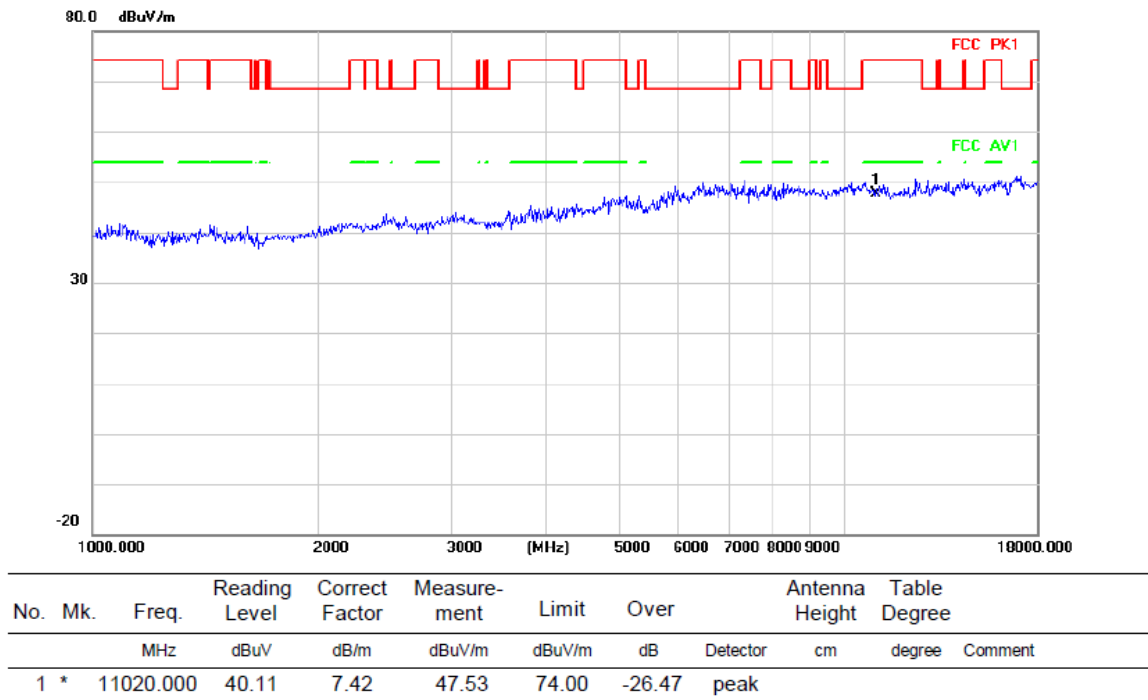


Radiated Emission

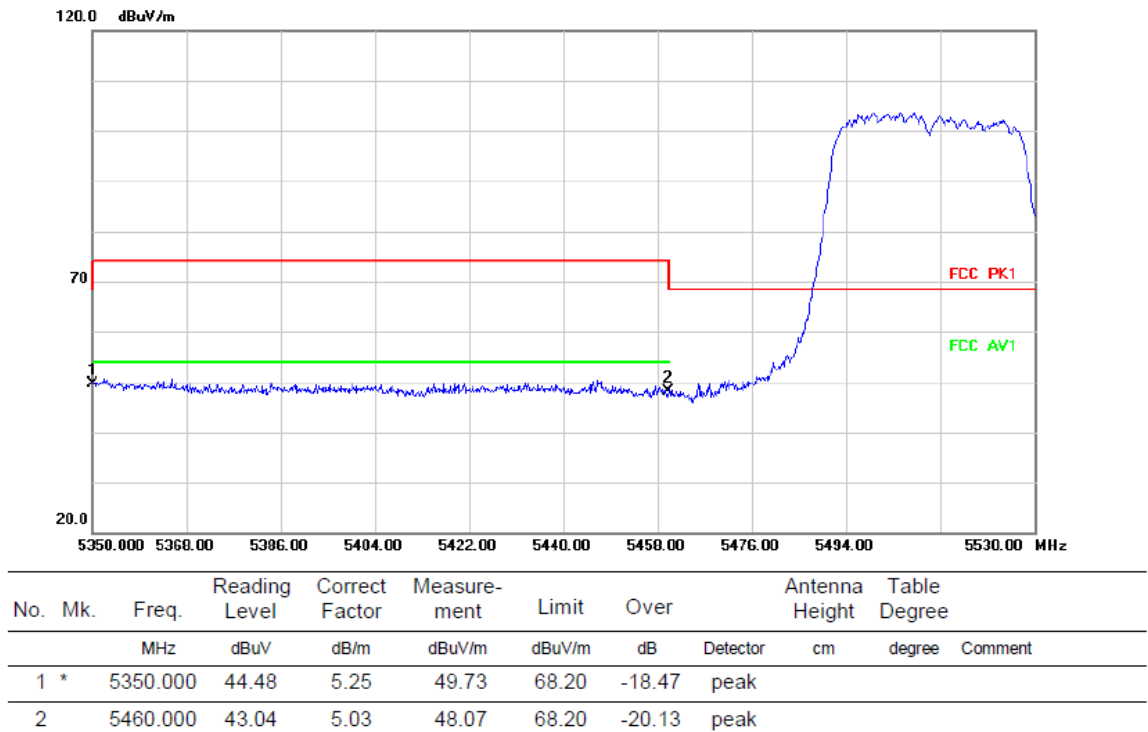

VERTICAL


Radiated Emission

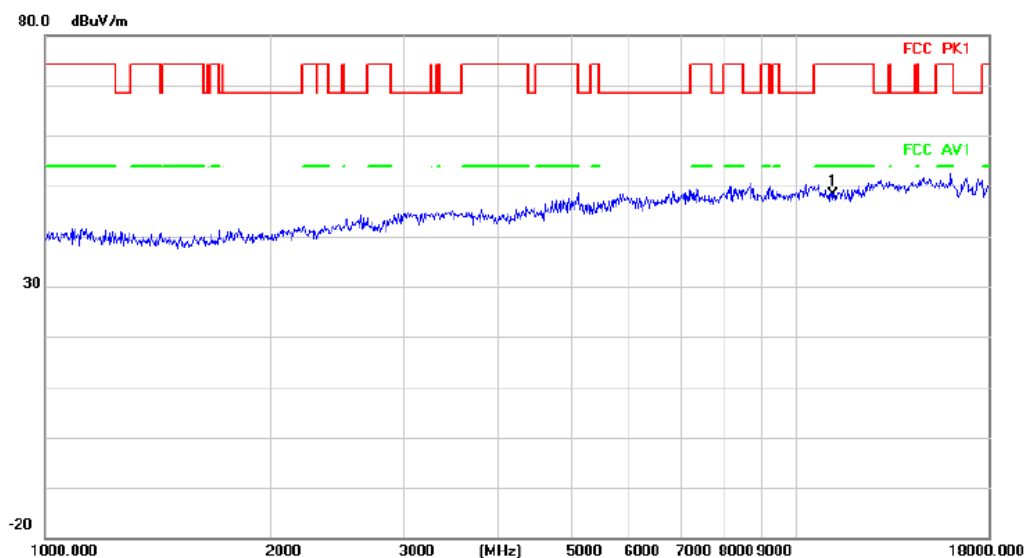

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11100.000	40.60	7.53	48.13	74.00	-25.87	peak		

HORIZONTAL


Radiated Emission

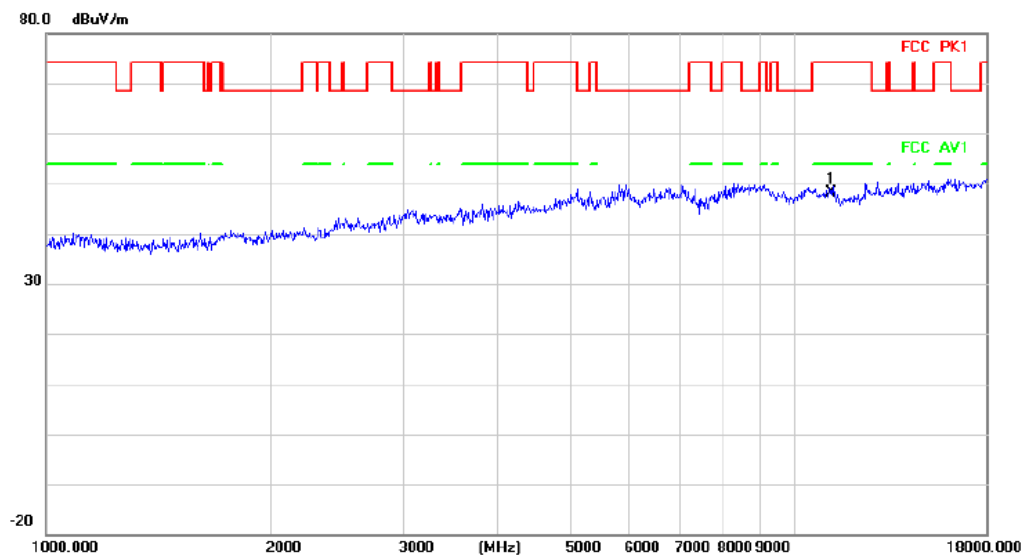

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11100.000	40.53	7.53	48.06	74.00	-25.94	peak		

VERTICAL


Radiated Emission

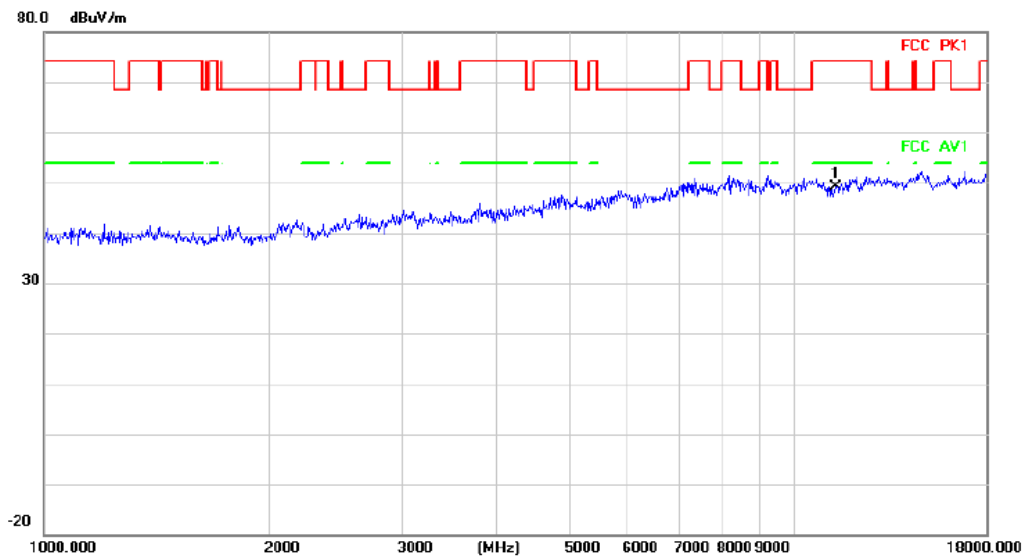

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11340.000	41.32	7.77	49.09	74.00	-24.91	peak	

HORIZONTAL


Radiated Emission

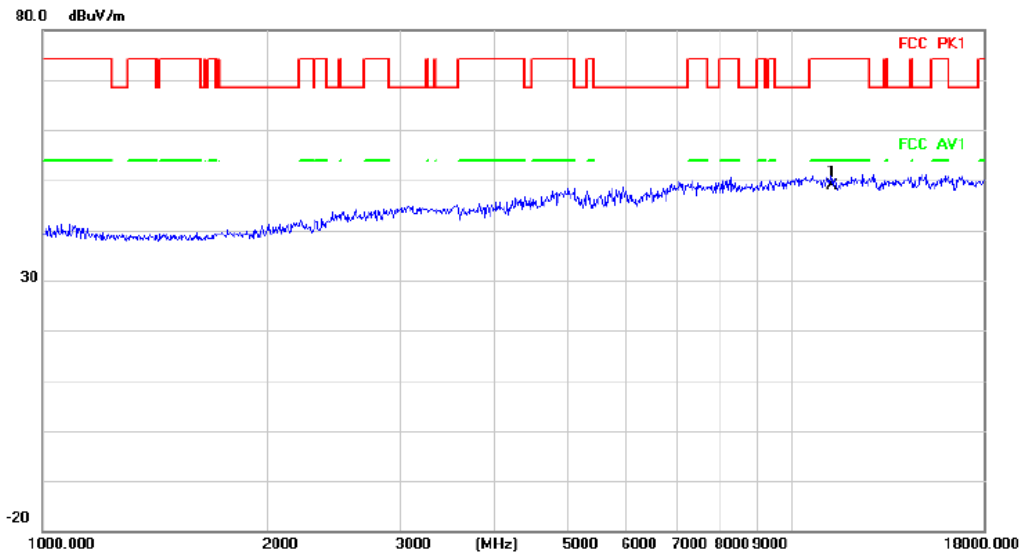

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11340.000	41.10	7.77	48.87	74.00	-25.13	peak	


VERTICAL

Radiated Emission

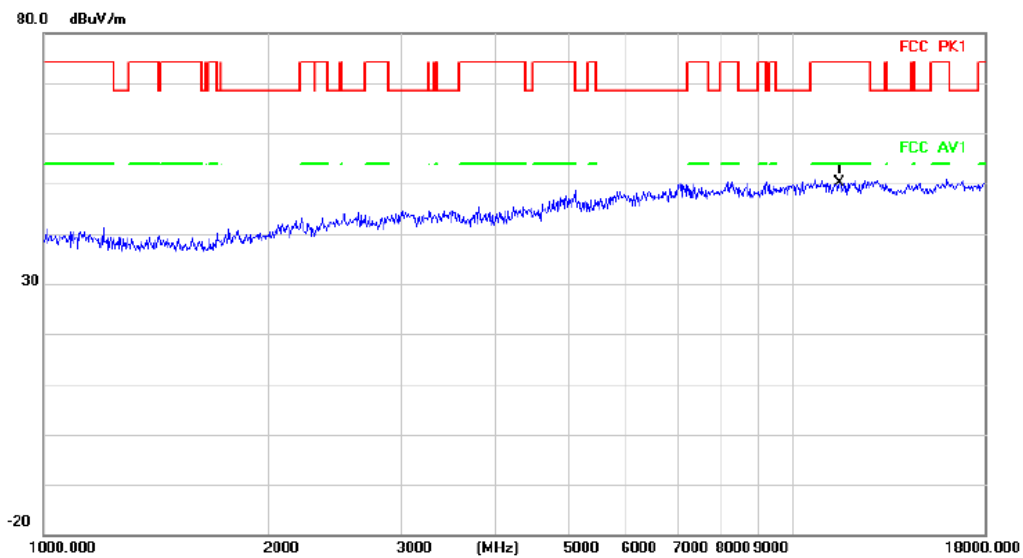

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11510.000	42.28	7.76	50.04	74.00	-23.96	peak		Comment


Radiated Emission

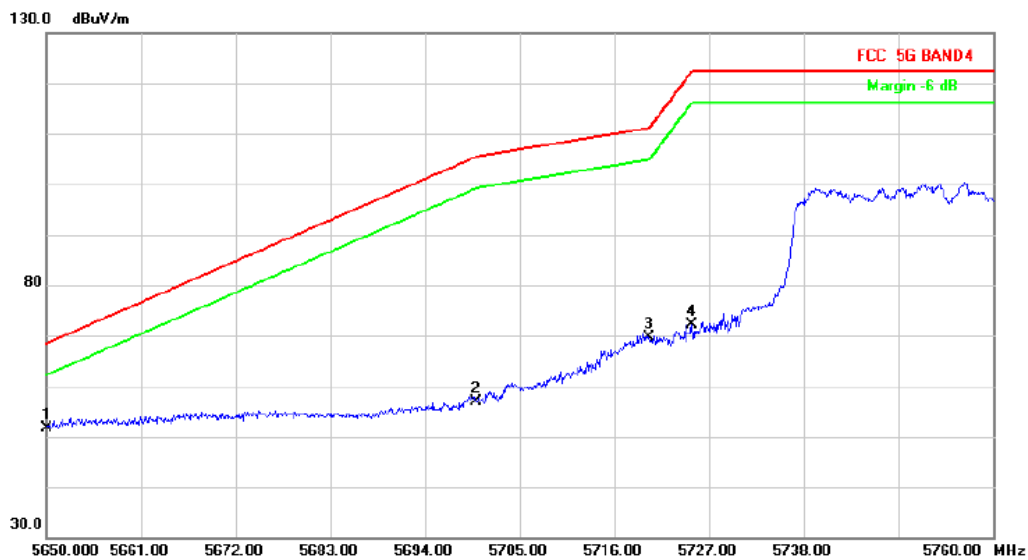

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5650.000	45.95	5.72	51.67	68.20	-16.53	peak		Comment
2		5700.000	50.84	6.00	56.84	105.20	-48.36	peak		
3		5720.000	63.84	5.82	69.66	110.80	-41.14	peak		
4		5725.000	66.47	5.78	72.25	122.20	-49.95	peak		


HORIZONTAL

Radiated Emission

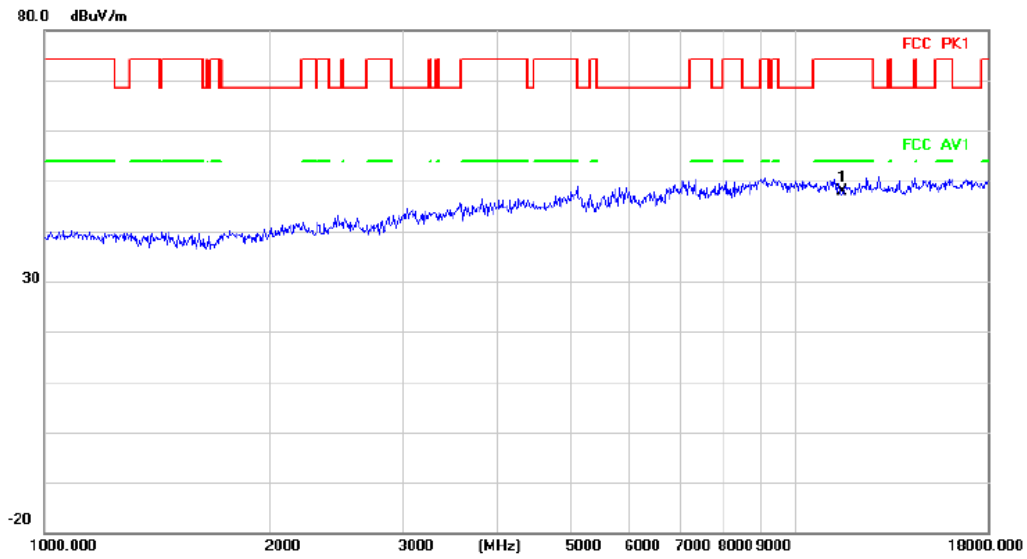

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11510.000	40.24	7.76	48.00	74.00	-26.00	peak	


Radiated Emission

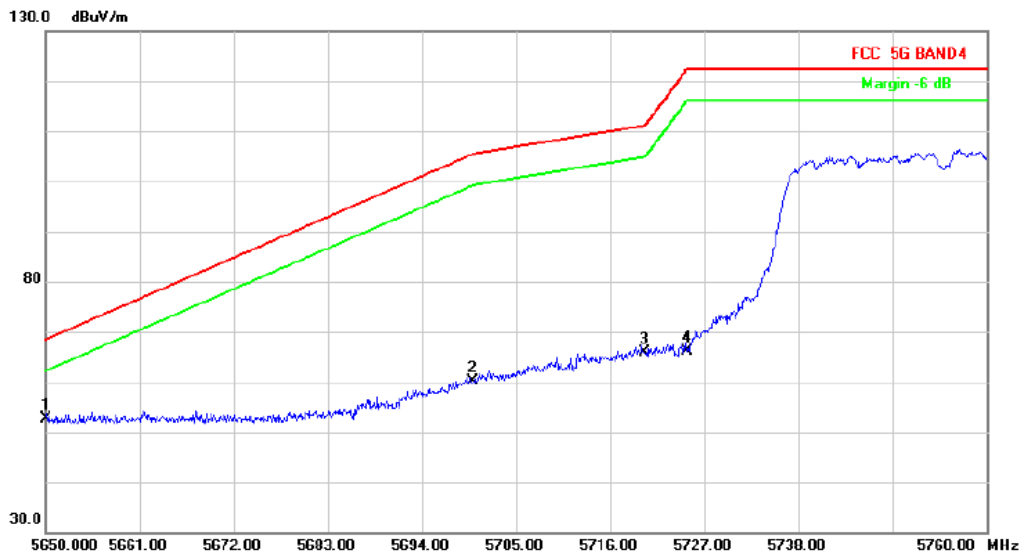

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	5650.000	46.81	5.72	52.53	68.20	-15.67	peak	
2		5700.000	54.25	6.00	60.25	105.20	-44.95	peak	
3		5720.000	60.01	5.82	65.83	110.80	-44.97	peak	
4		5725.000	60.40	5.78	66.18	122.20	-56.02	peak	


VERTICAL

Radiated Emission

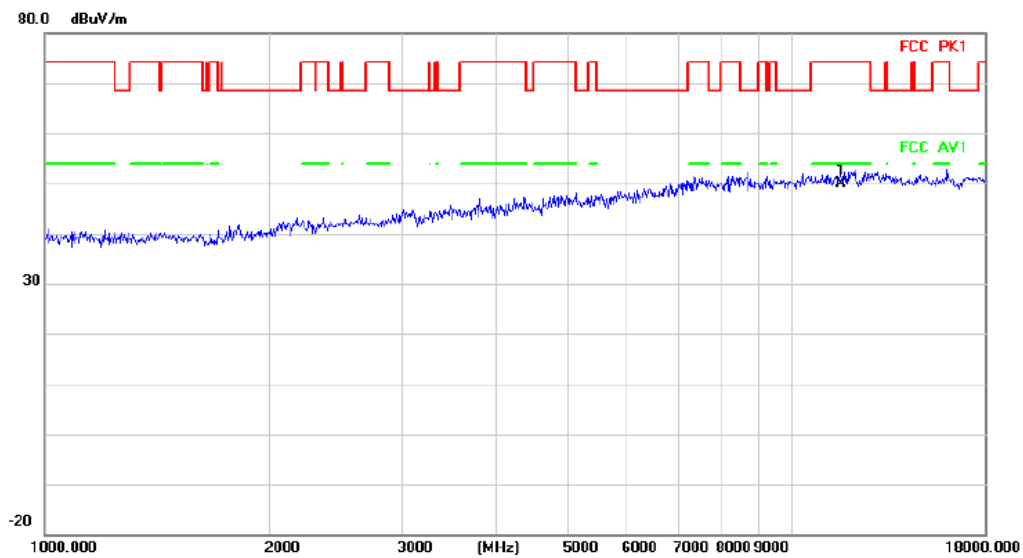

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11590.000	42.41	7.56	49.97	74.00	-24.03	peak		


Radiated Emission

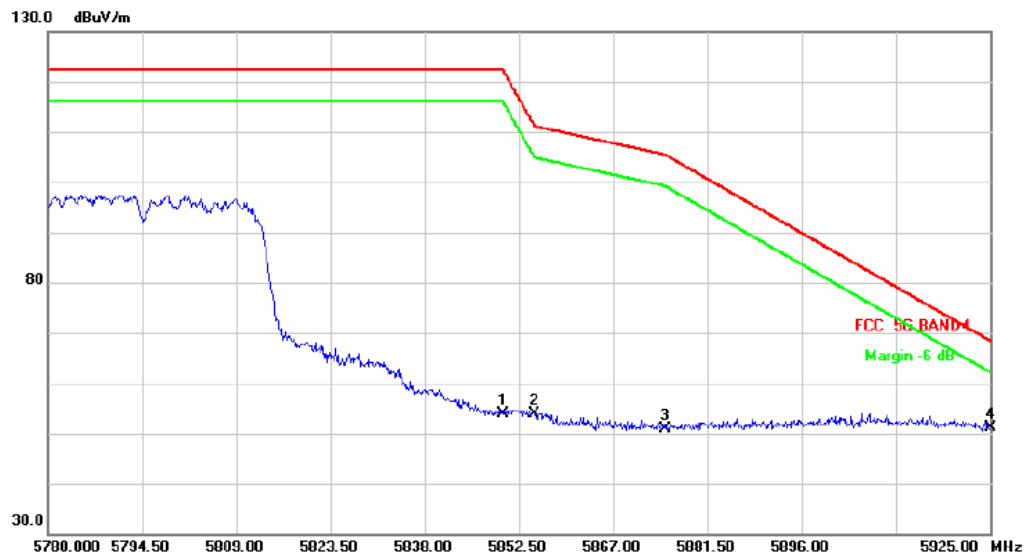

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.000	47.00	6.79	53.79	122.20	-68.41	peak		
2		5855.000	47.04	6.72	53.76	110.80	-57.04	peak		
3		5875.000	44.49	6.46	50.95	105.20	-54.25	peak		
4	*	5925.000	44.56	6.46	51.02	68.20	-17.18	peak		


HORIZONTAL

Radiated Emission

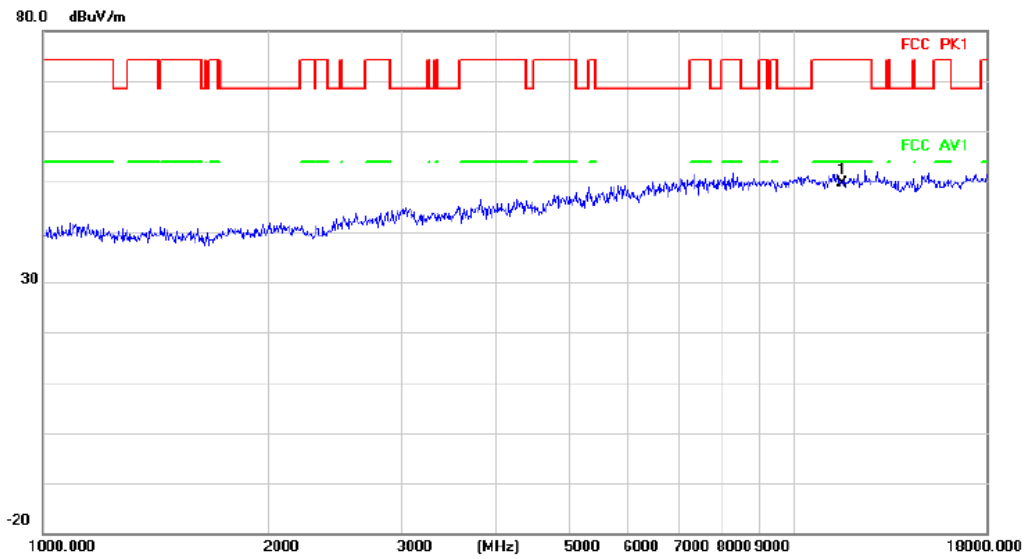

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11590.000	42.17	7.56	49.73	74.00	-24.27	peak	


Radiated Emission

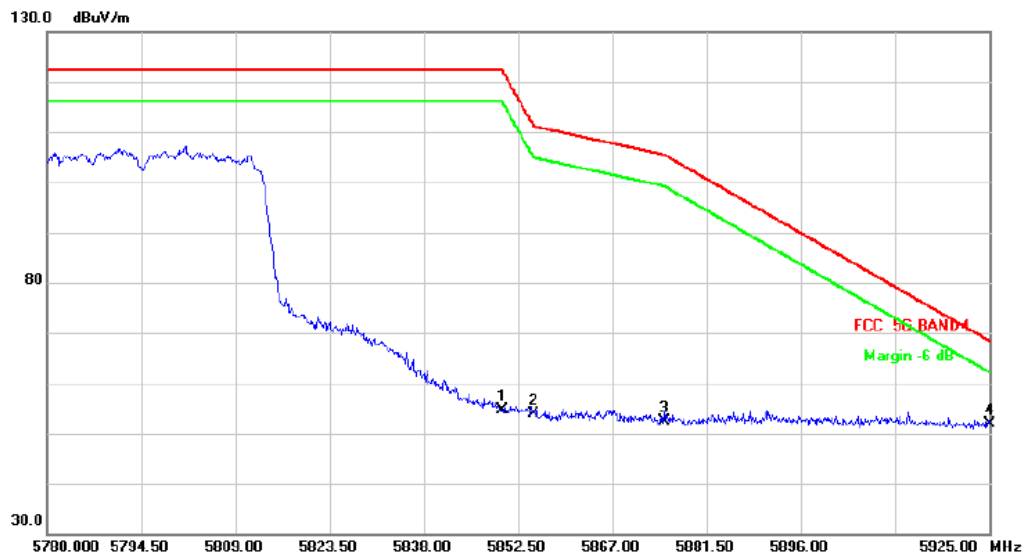

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		5850.000	47.75	6.79	54.54	122.20	-67.66	peak	
2		5855.000	47.27	6.72	53.99	110.80	-56.81	peak	
3		5875.000	45.98	6.46	52.44	105.20	-52.76	peak	
4	*	5925.000	45.45	6.46	51.91	68.20	-16.29	peak	


VERTICAL

Radiated Emission

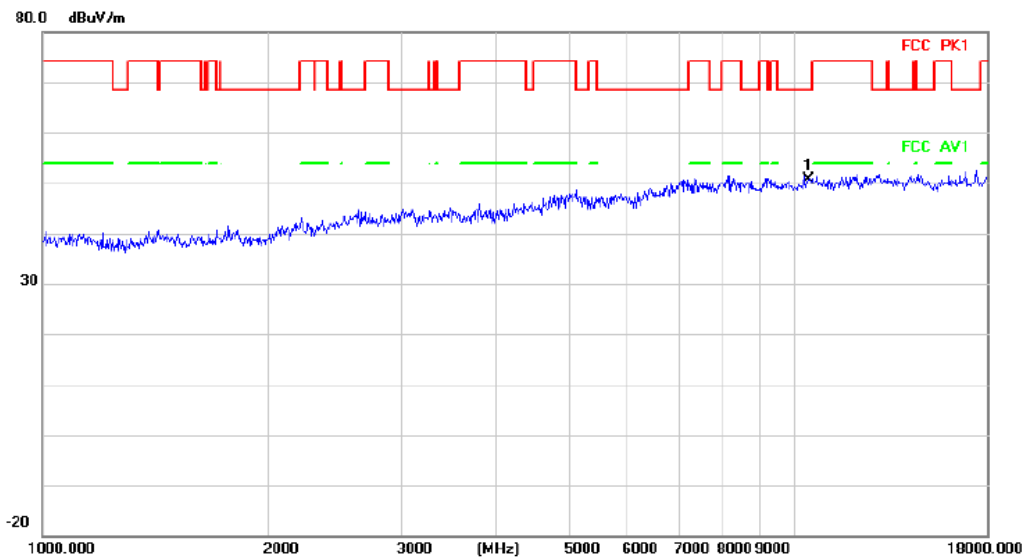

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10420.000	43.11	7.45	50.56	68.20	-17.64	peak		Comment


Radiated Emission

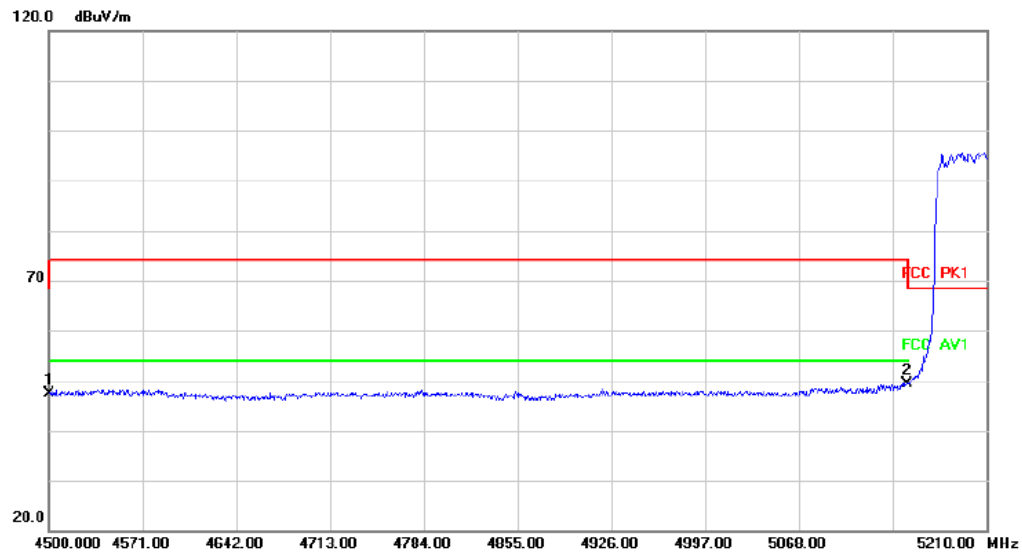

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4500.000	42.82	4.45	47.27	68.20	-20.93	peak		Comment
2	*	5150.000	43.44	6.04	49.48	68.20	-18.72	peak		Comment


HORIZONTAL

Radiated Emission

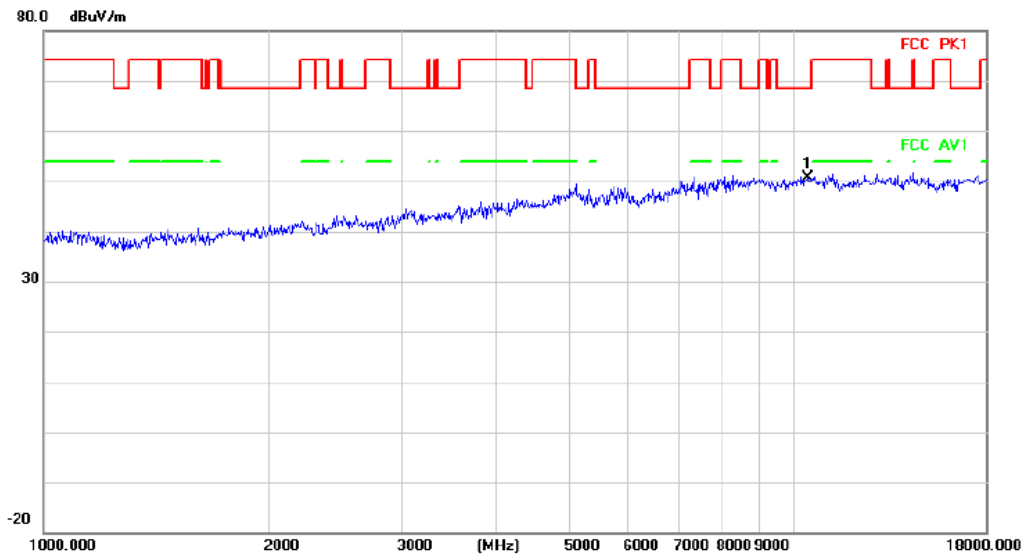

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10420.000	43.23	7.45	50.68	68.20	-17.52	peak		


Radiated Emission

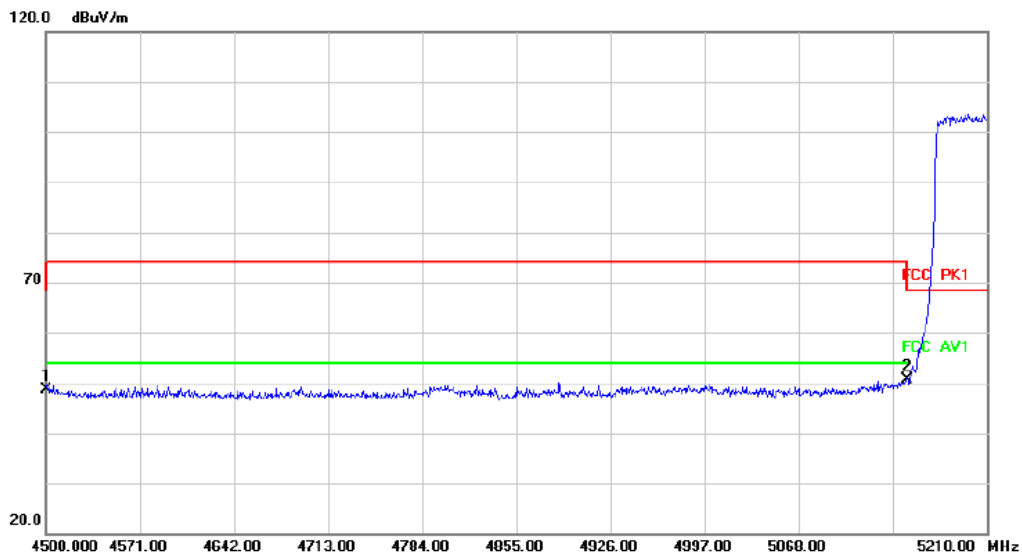

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4500.000	44.15	4.45	48.60	68.20	-19.60	peak		
2	*	5150.000	44.48	6.04	50.52	68.20	-17.68	peak		


VERTICAL

Radiated Emission

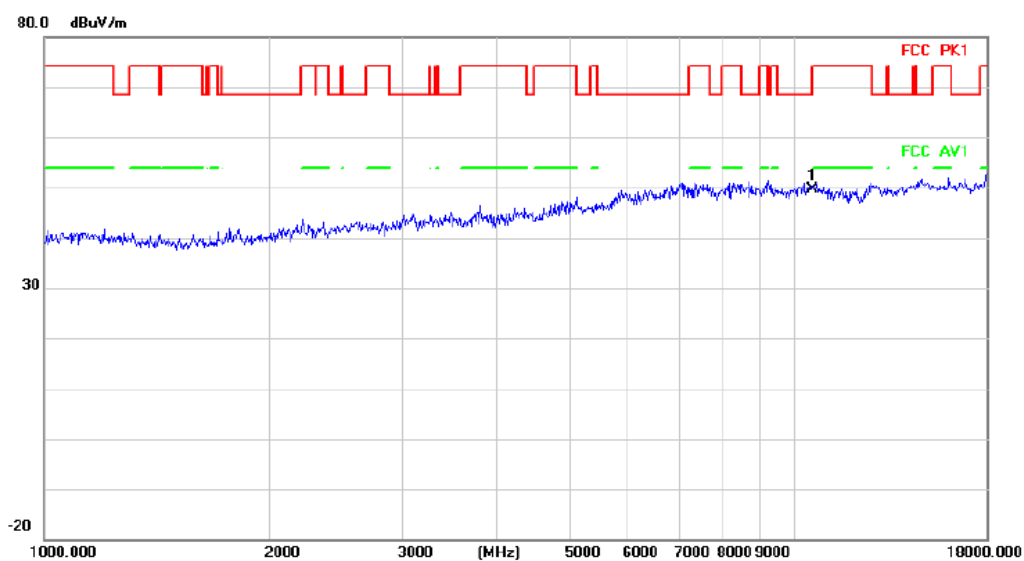

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10580.000	41.77	7.87	49.64	68.20	-18.56	peak		Comment


Radiated Emission

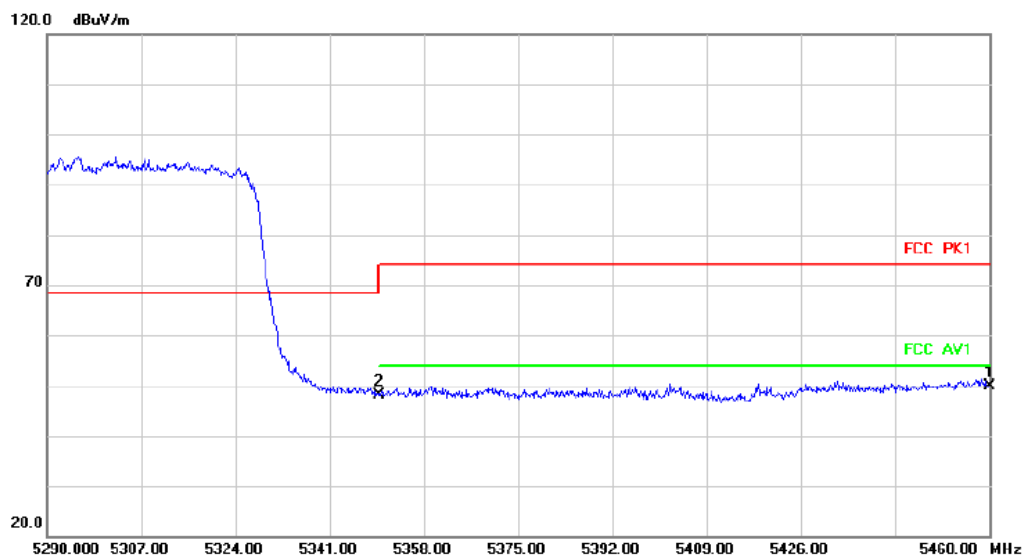

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5460.000	44.92	5.03	49.95	68.20	-18.25	peak		Comment
2		5350.000	42.99	5.25	48.24	68.20	-19.96	peak		


HORIZONTAL

Radiated Emission

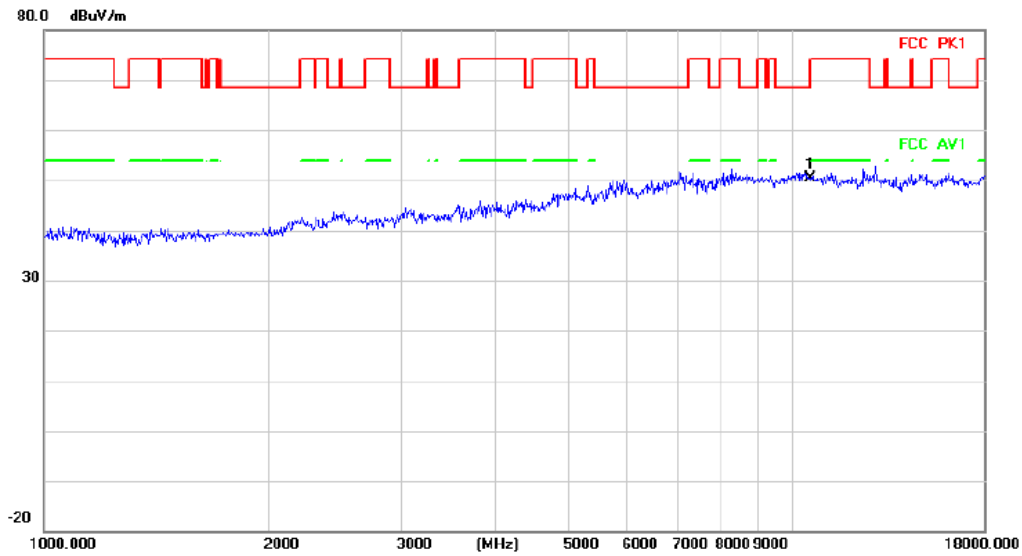

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10580.000	42.39	7.87	50.26	68.20	-17.94	peak		


Radiated Emission

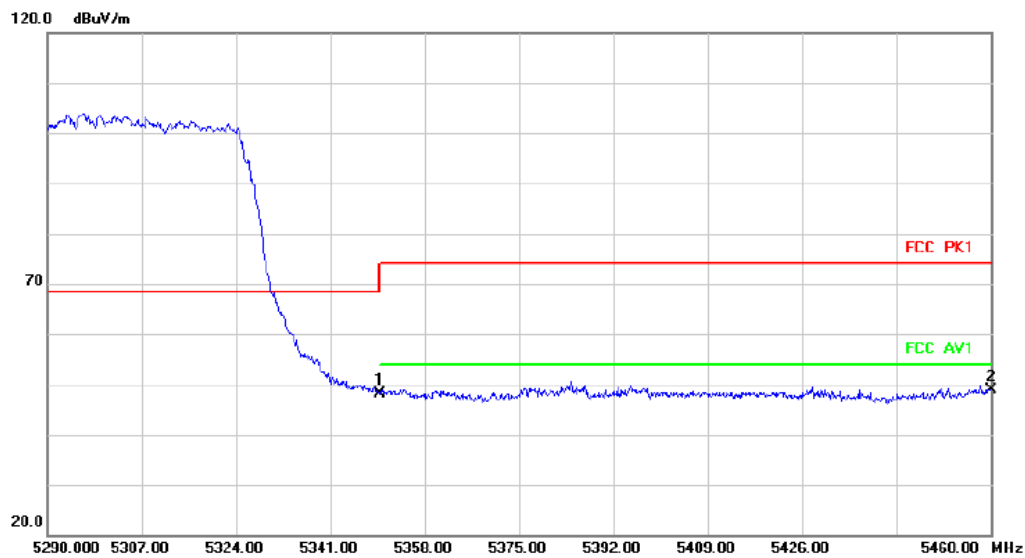

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5350.000	42.80	5.25	48.05	68.20	-20.15	peak		
2	*	5460.000	43.74	5.03	48.77	68.20	-19.43	peak		


VERTICAL

Radiated Emission

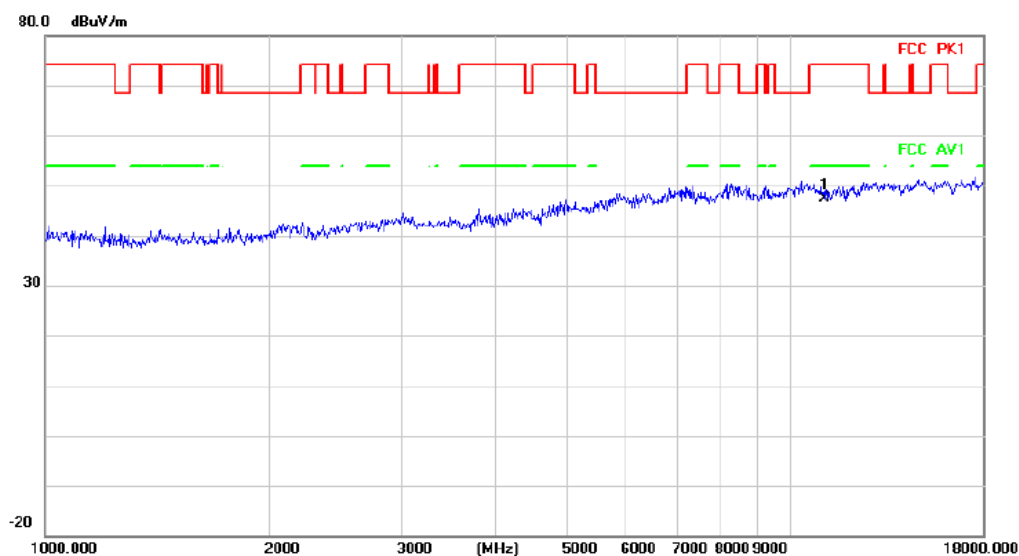

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11060.000	39.93	7.51	47.44	74.00	-26.56	peak		


Radiated Emission

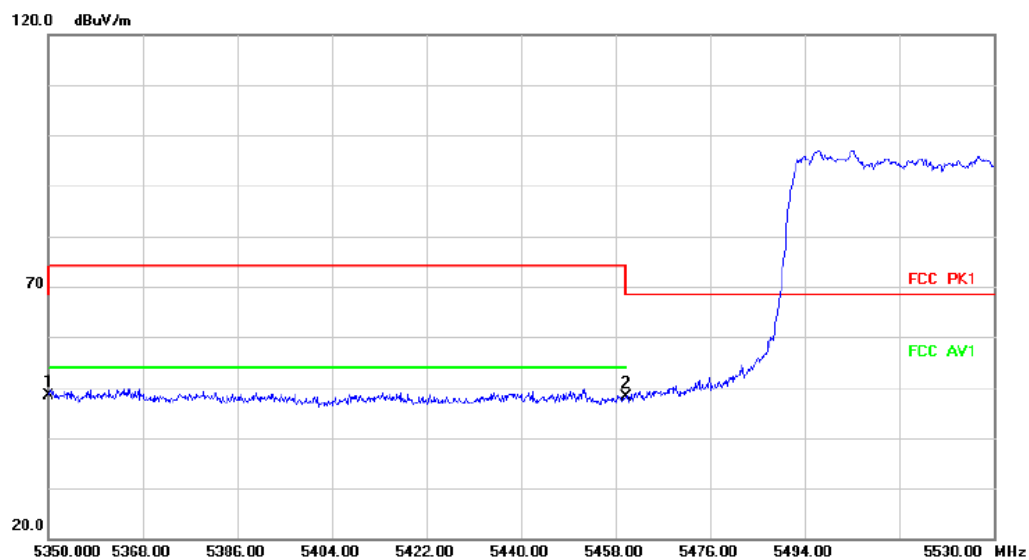

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5350.000	43.13	5.25	48.38	68.20	-19.82	peak		
2		5460.000	43.03	5.03	48.06	68.20	-20.14	peak		


HORIZONTAL

Radiated Emission

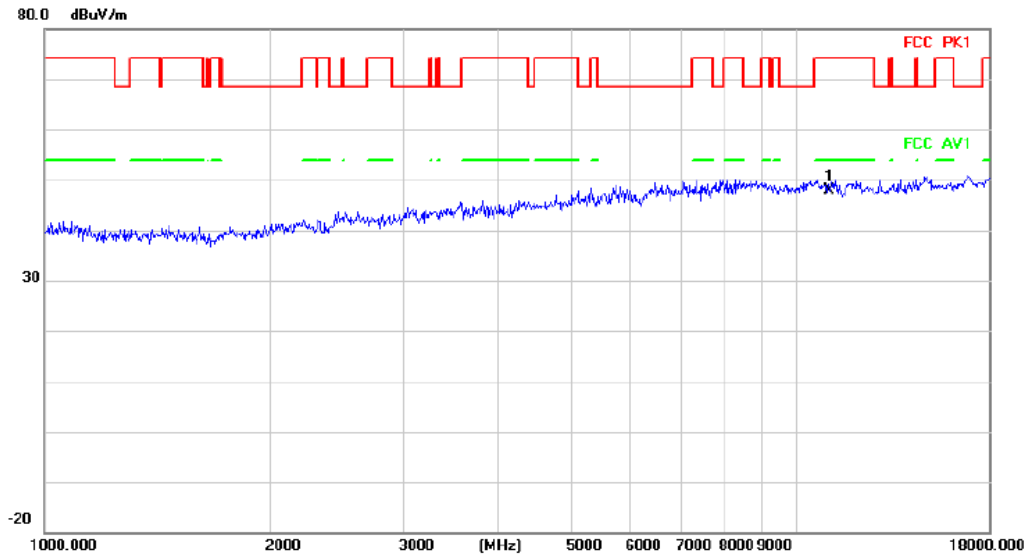

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11060.000	40.46	7.51	47.97	74.00	-26.03	peak		


Radiated Emission

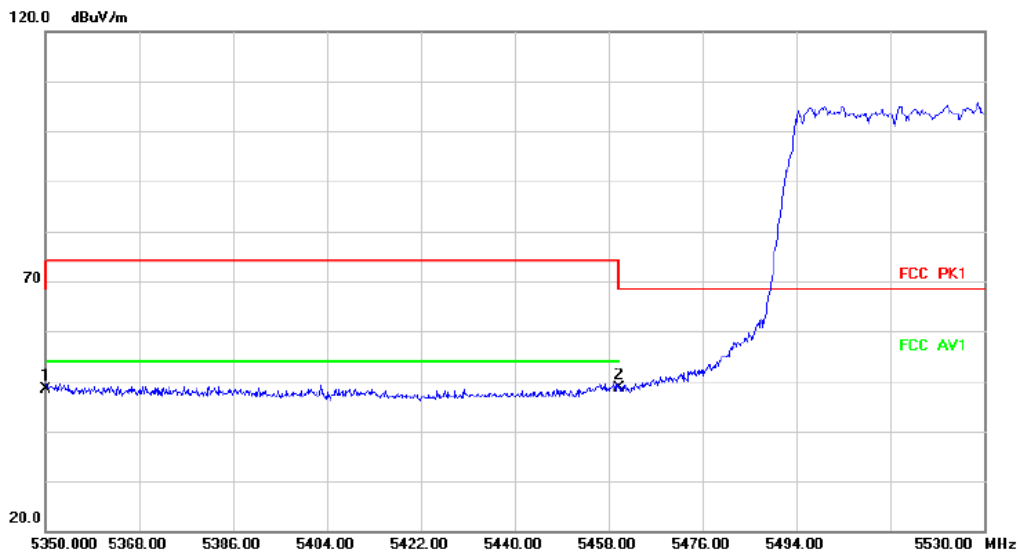

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5350.000	43.14	5.25	48.39	68.20	-19.81	peak		
2	*	5460.000	43.53	5.03	48.56	68.20	-19.64	peak		

VERTICAL


Radiated Emission

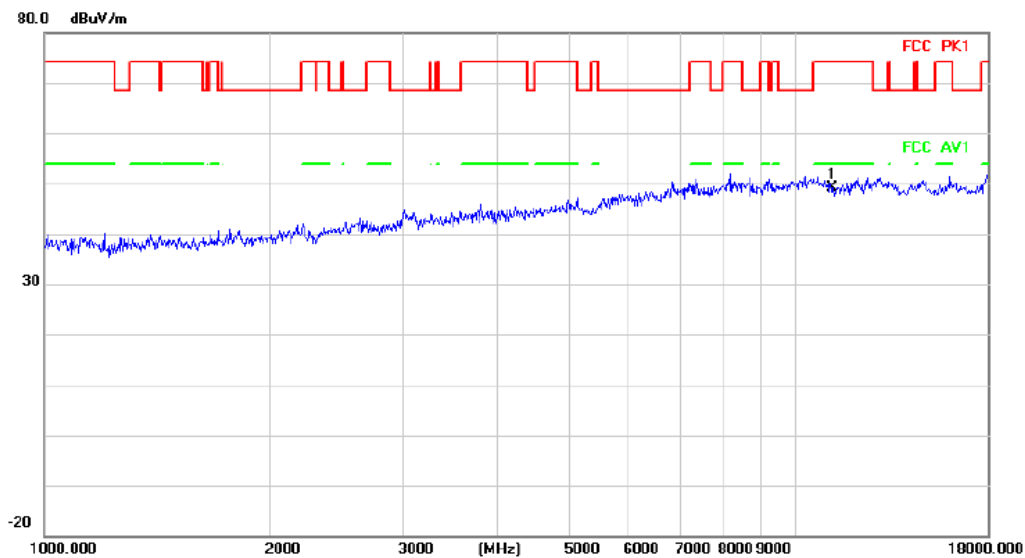

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11220.000	41.53	7.59	49.12	74.00	-24.88	peak		Comment

HORIZONTAL


Radiated Emission

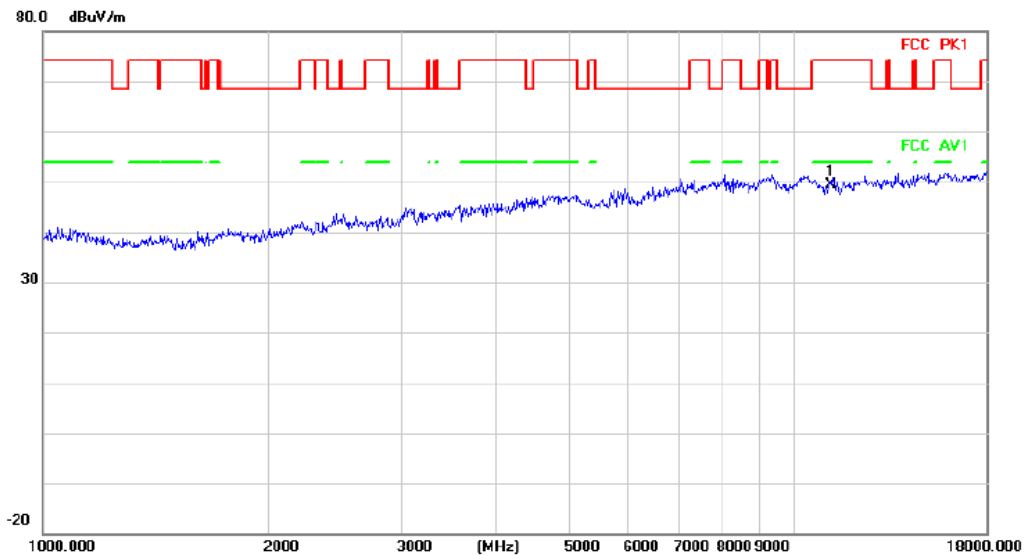


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11220.000	41.91	7.59	49.50	74.00	-24.50	peak		Comment

VERTICAL

Radiated Emission

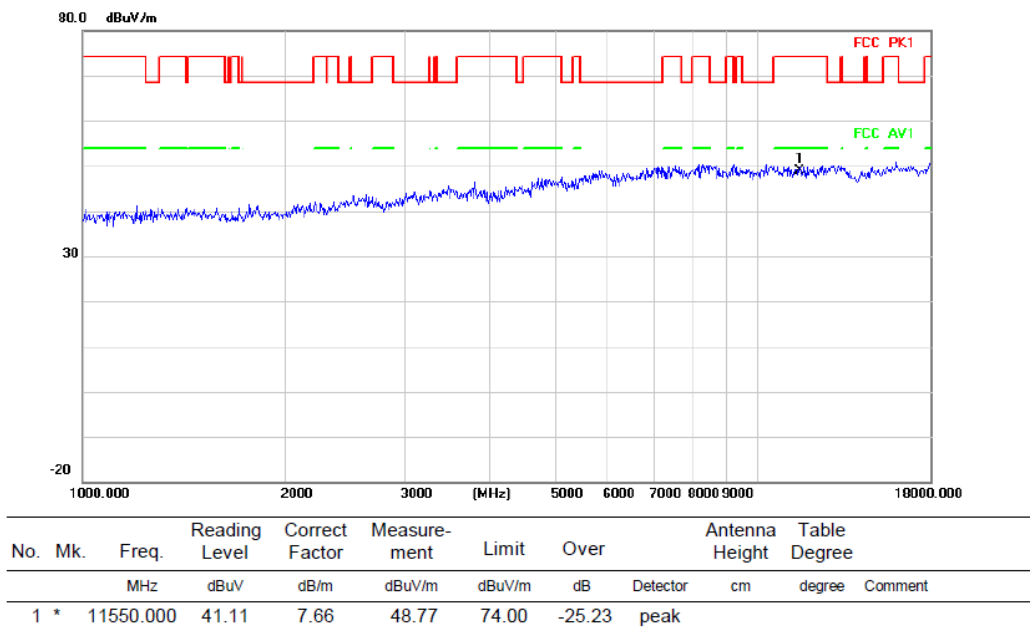


Radiated Emission

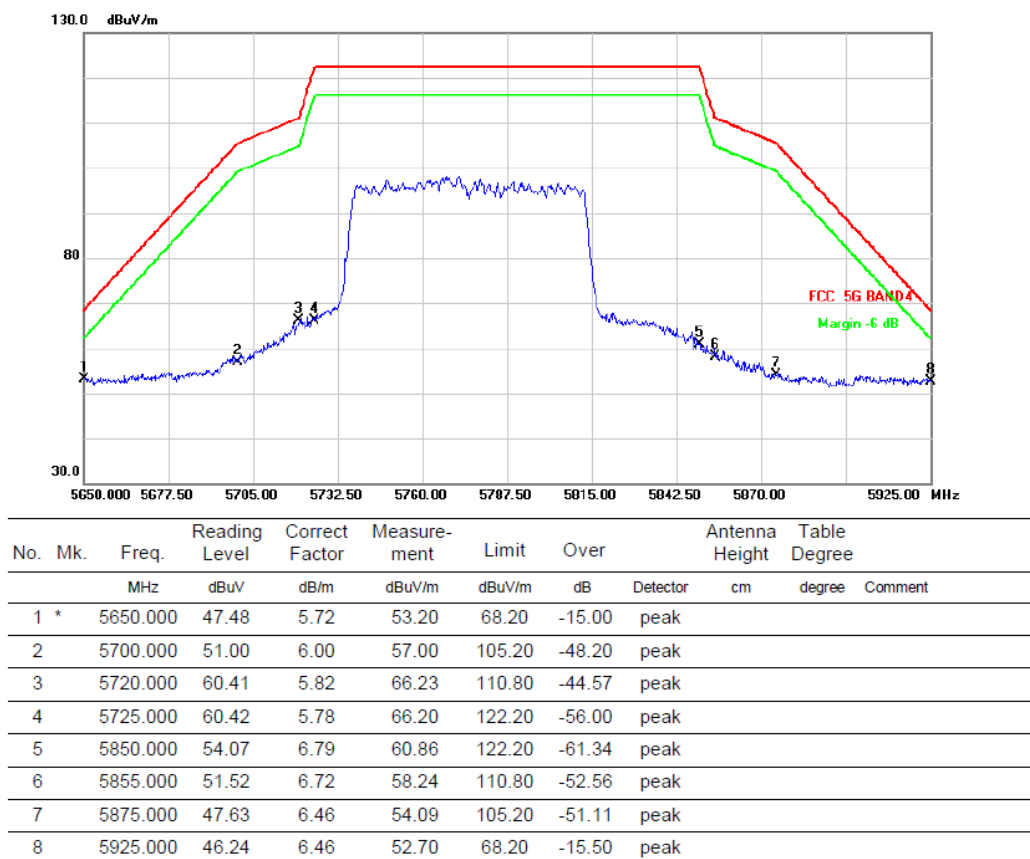


HORIZONTAL

Radiated Emission

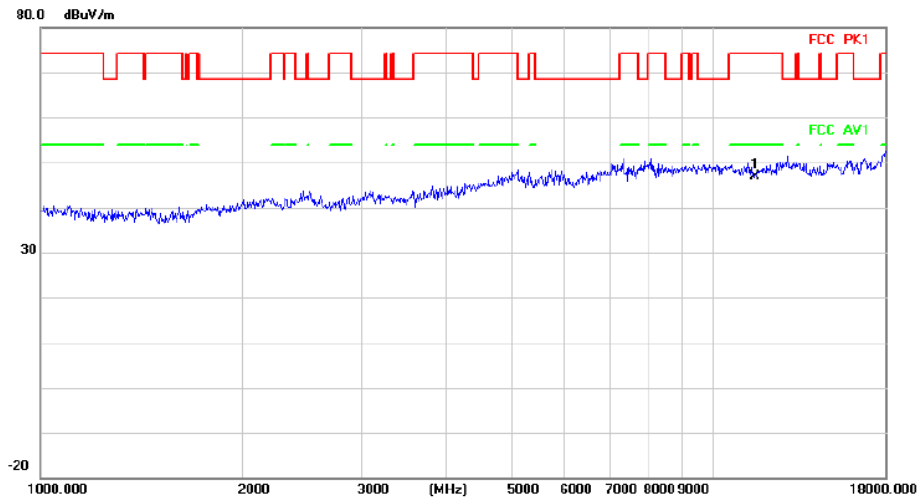

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11550.000	39.32	7.66	46.98	74.00	-27.02	peak		Comment


Radiated Emission

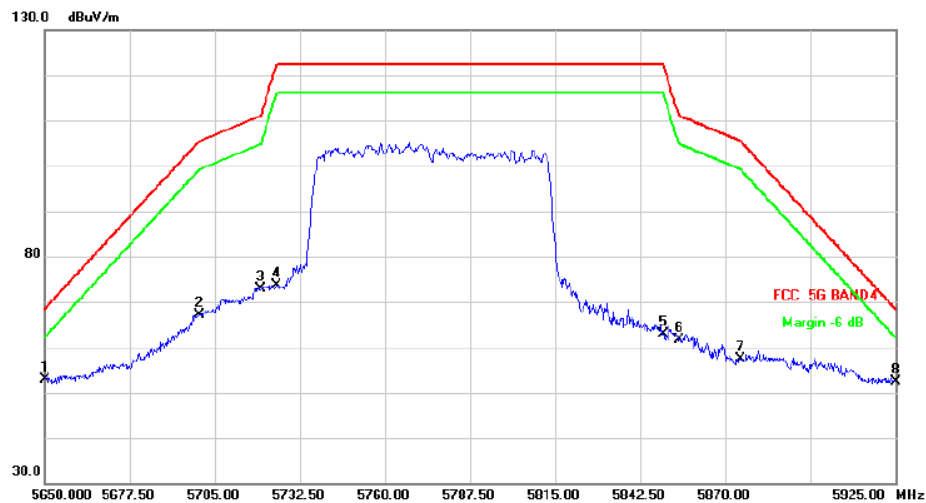

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5650.000	47.09	5.72	52.81	68.20	-15.39	peak		Comment
2		5700.000	61.01	6.00	67.01	105.20	-38.19	peak		
3		5720.000	67.15	5.82	72.97	110.80	-37.83	peak		
4		5725.000	67.84	5.78	73.62	122.20	-48.58	peak		
5		5850.000	56.09	6.79	62.88	122.20	-59.32	peak		
6		5855.000	54.82	6.72	61.54	110.80	-49.26	peak		
7		5875.000	50.92	6.46	57.38	105.20	-47.82	peak		
8		5925.000	45.81	6.46	52.27	68.20	-15.93	peak		


VERTICAL

Radiated Emission

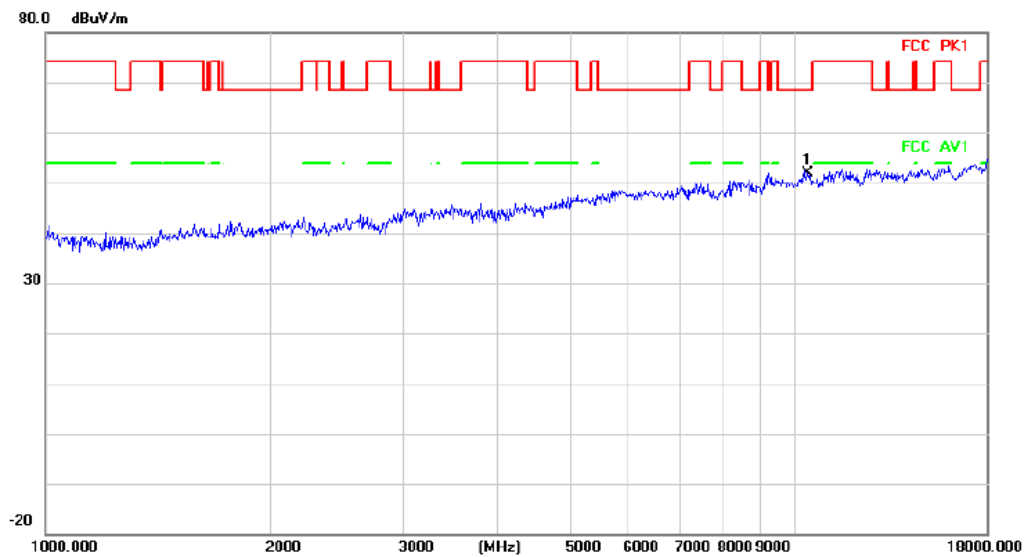

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	10360.000	44.67	7.25	51.92	68.20	-16.28	peak	


Radiated Emission

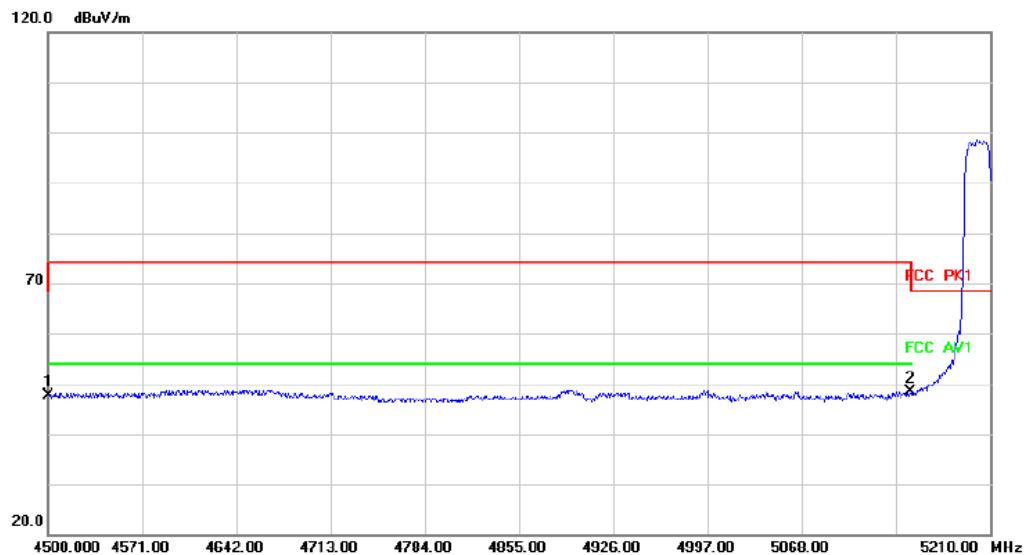

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		4500.000	43.07	4.45	47.52	68.20	-20.68	peak	
2	*	5150.000	42.24	6.04	48.28	68.20	-19.92	peak	


HORIZONTAL

Radiated Emission

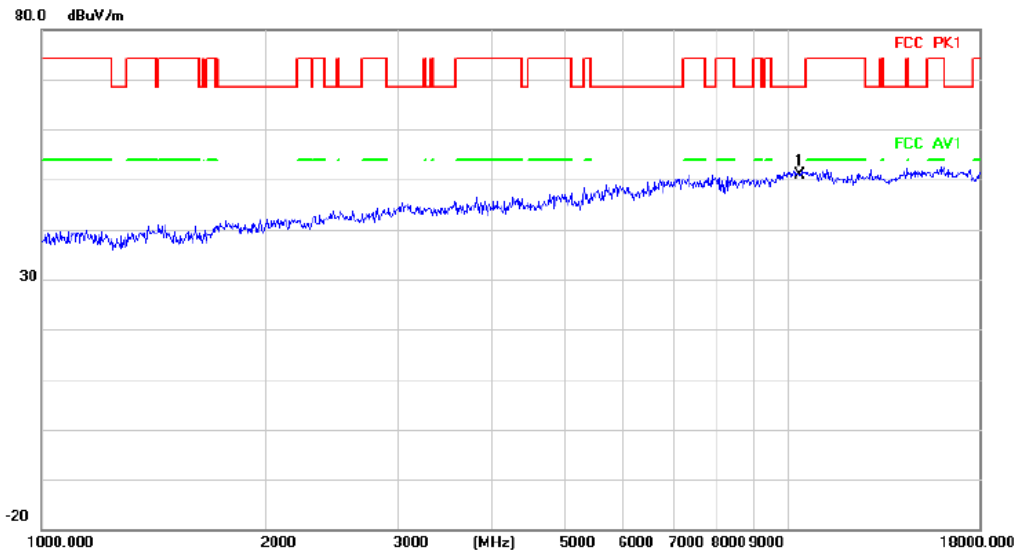

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	10360.000	43.54	7.25	50.79	68.20	-17.41	peak	


Radiated Emission

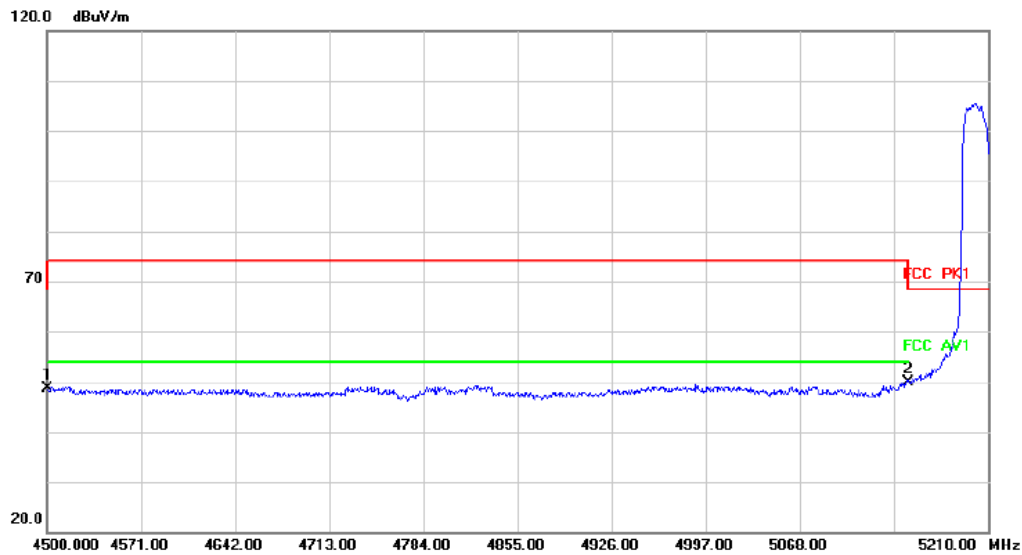

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		4500.000	44.07	4.45	48.52	68.20	-19.68	peak	
2	*	5150.000	43.87	6.04	49.91	68.20	-18.29	peak	

VERTICAL


Radiated Emission

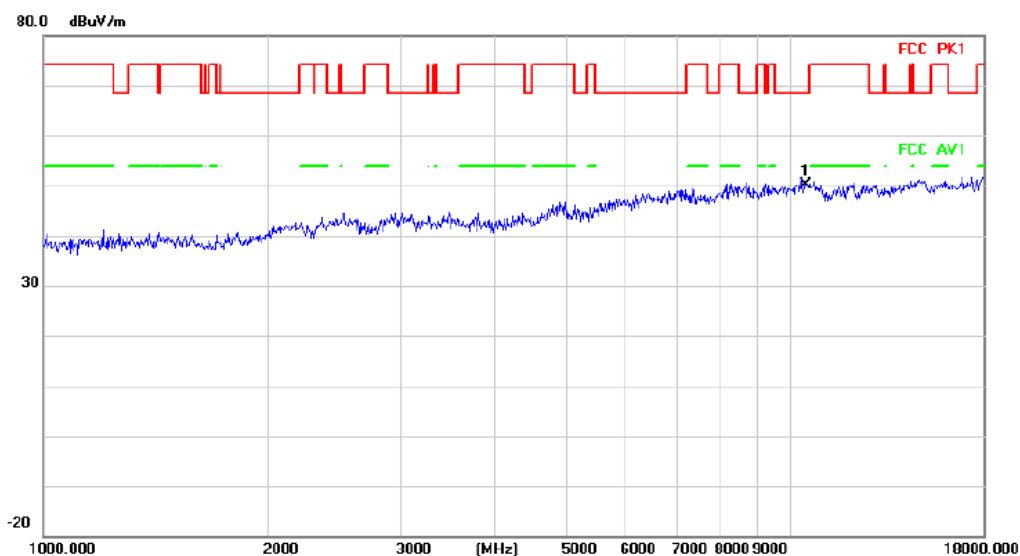

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10400.000	42.63	7.39	50.02	68.20	-18.18	peak		Comment

HORIZONTAL


Radiated Emission

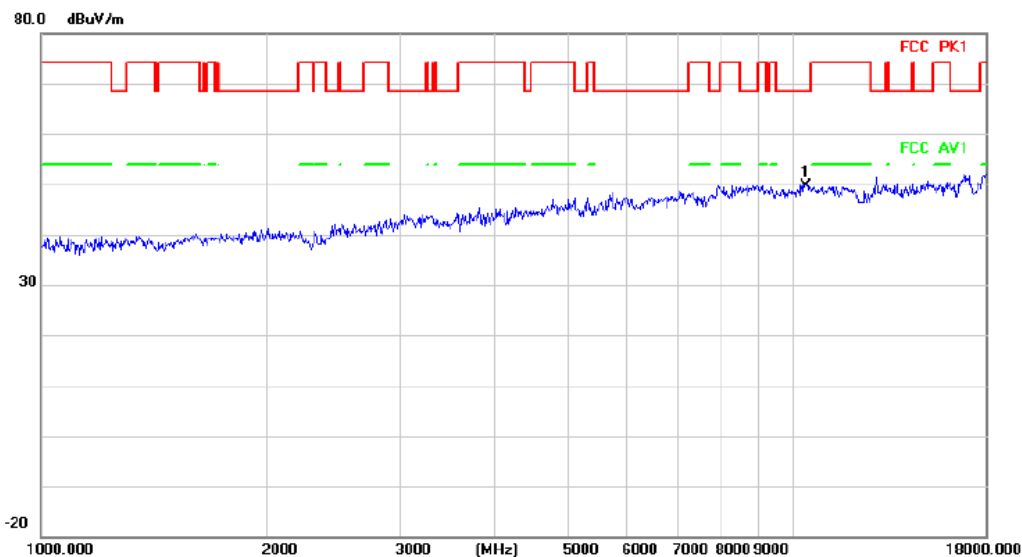

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10400.000	42.32	7.39	49.71	68.20	-18.49	peak		Comment

VERTICAL


Radiated Emission

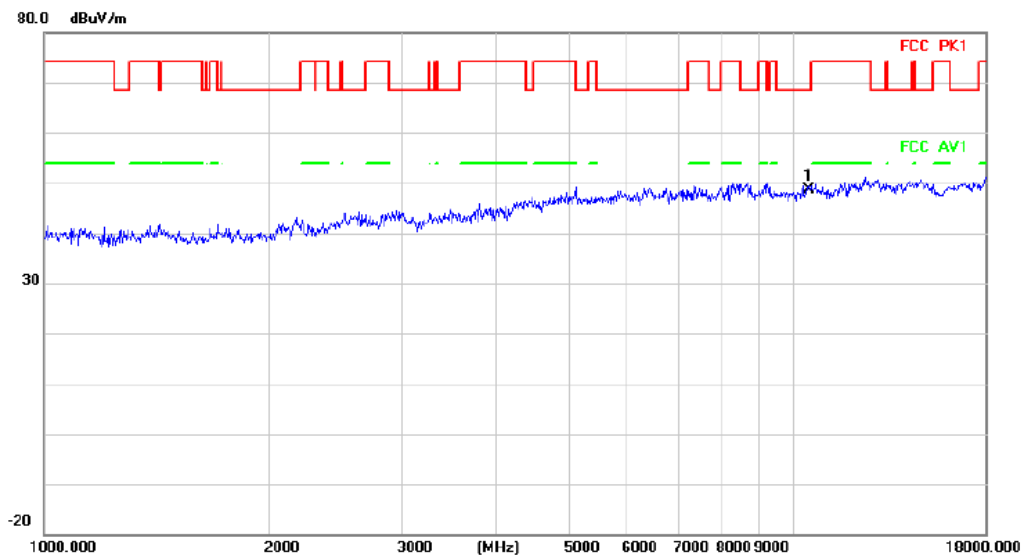

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10480.000	41.00	7.60	48.60	68.20	-19.60	peak		Comment

HORIZONTAL


Radiated Emission

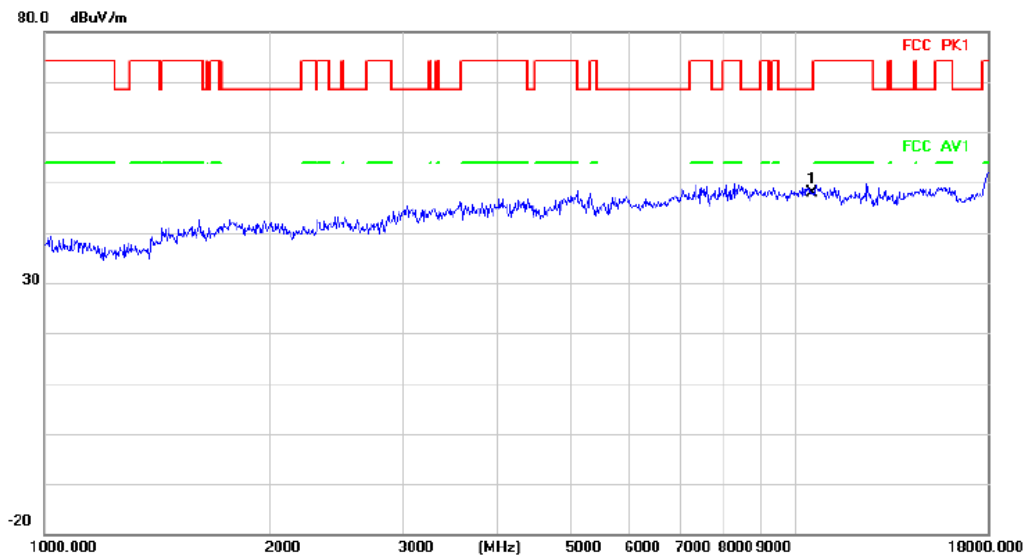

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10480.000	40.34	7.60	47.94	68.20	-20.26	peak		Comment

VERTICAL


Radiated Emission

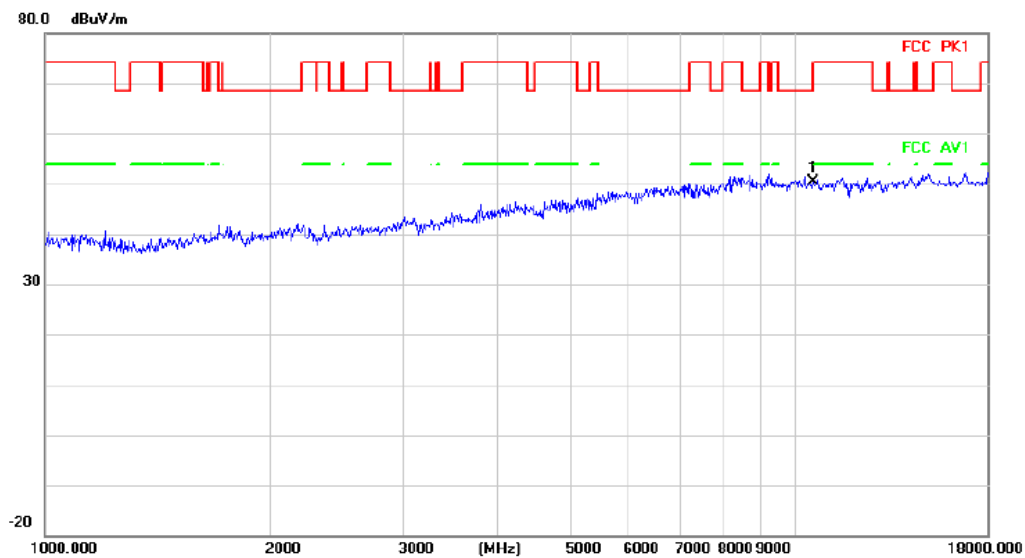

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10520.000	42.64	7.71	50.35	68.20	-17.85	peak		Comment

HORIZONTAL


Radiated Emission

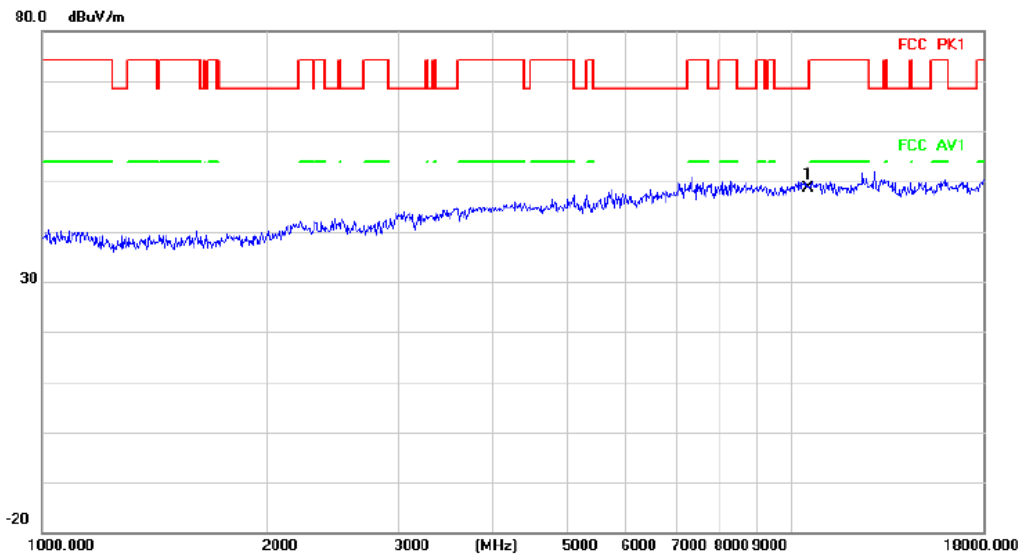

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10520.000	41.01	7.71	48.72	68.20	-19.48	peak		Comment

VERTICAL


Radiated Emission

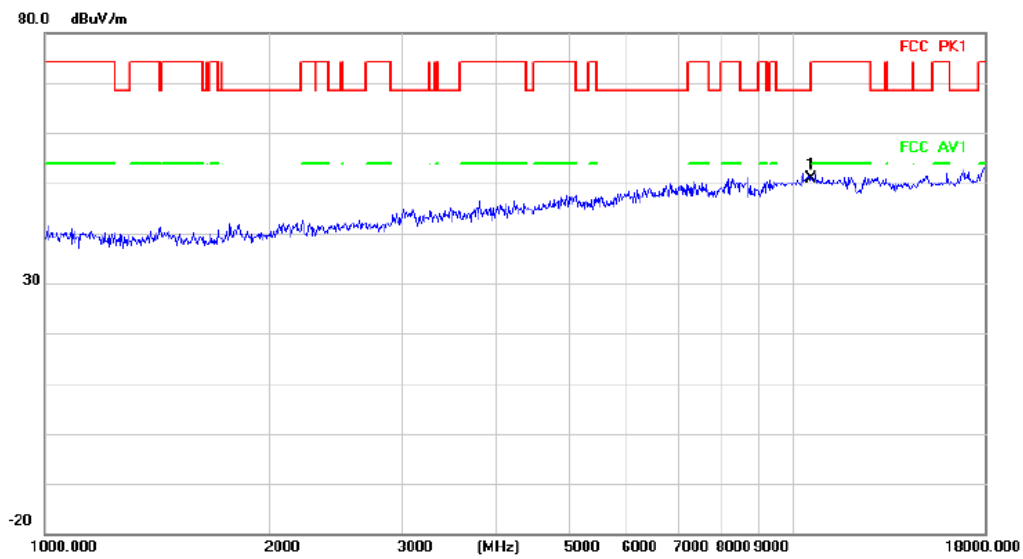

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10560.000	43.13	7.81	50.94	68.20	-17.26	peak		Comment

HORIZONTAL


Radiated Emission

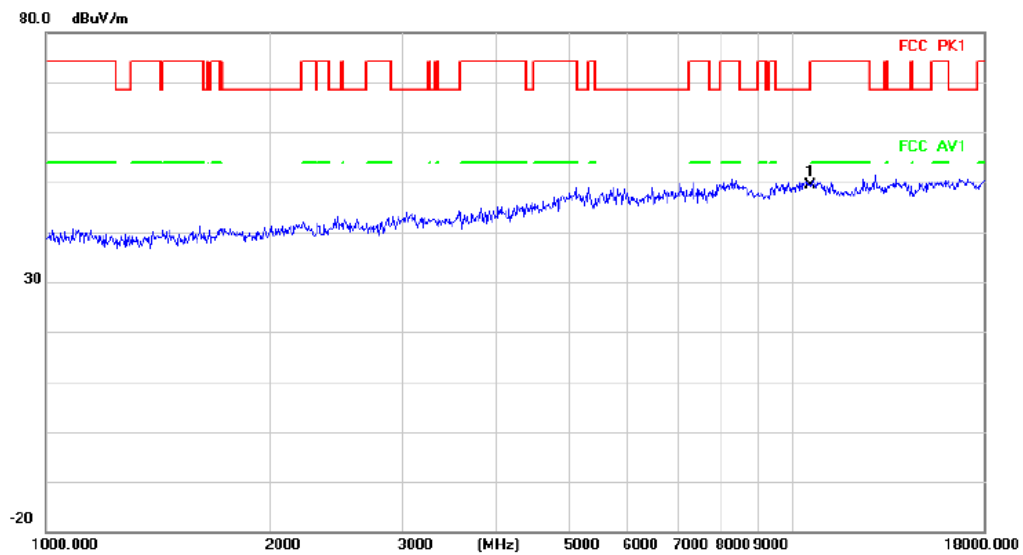

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10560.000	41.52	7.81	49.33	68.20	-18.87	peak		Comment


VERTICAL

Radiated Emission

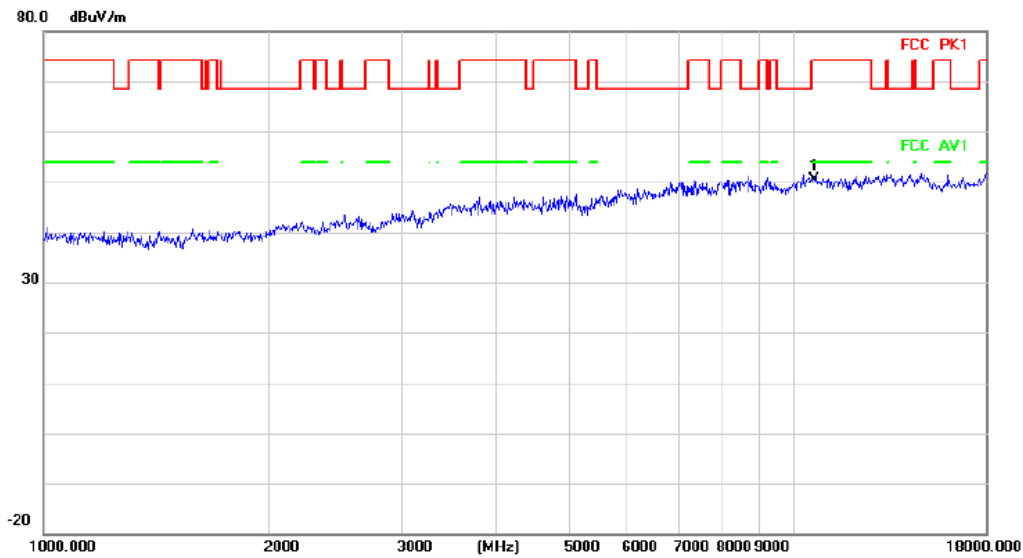

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10640.000	42.51	7.87	50.38	74.00	-23.62	peak		Comment


Radiated Emission

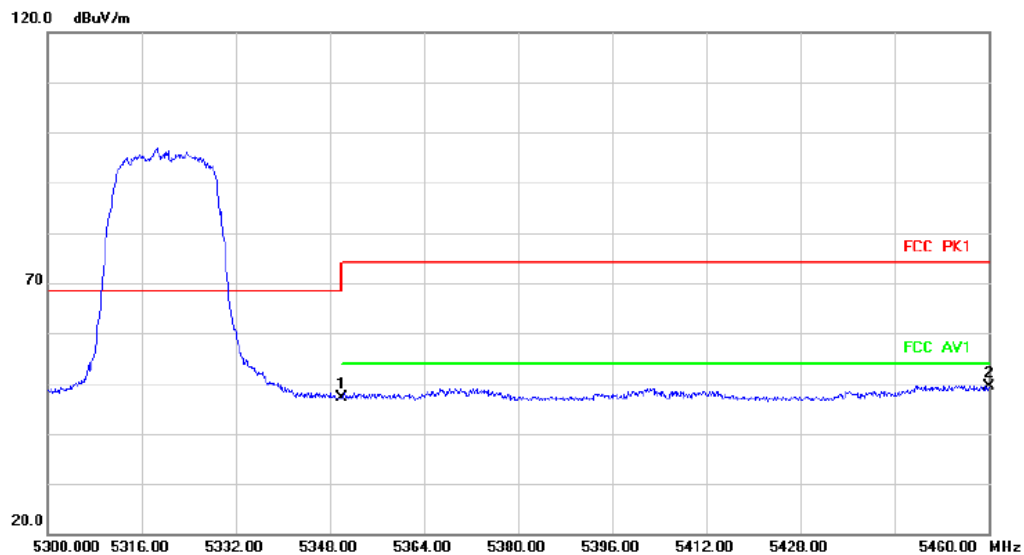


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5350.000	41.94	5.25	47.19	68.20	-21.01	peak		Comment
2	*	5460.000	44.24	5.03	49.27	68.20	-18.93	peak		Comment

HORIZONTAL

Radiated Emission

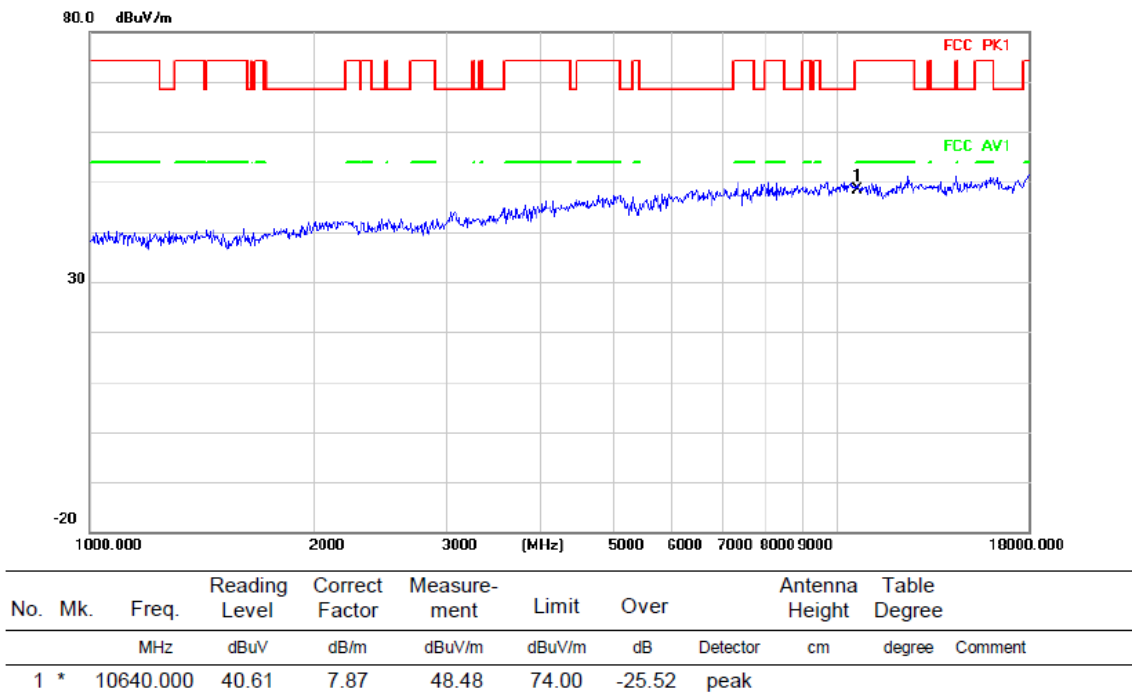


Radiated Emission

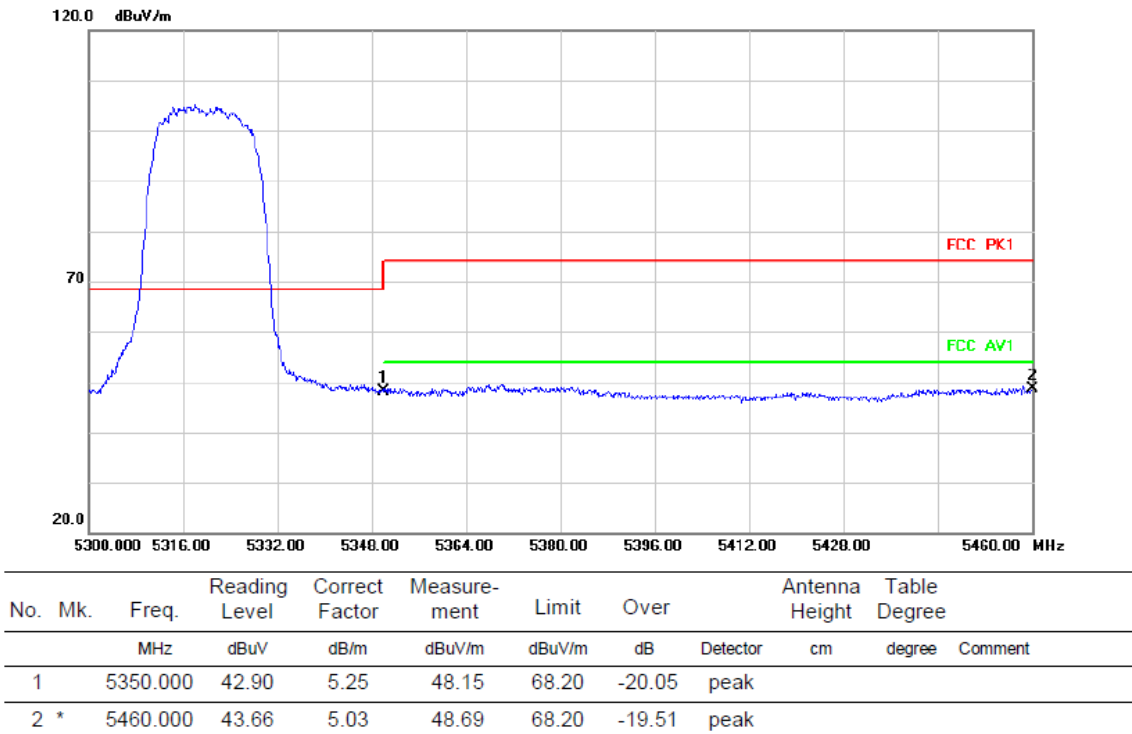


VERTICAL

Radiated Emission

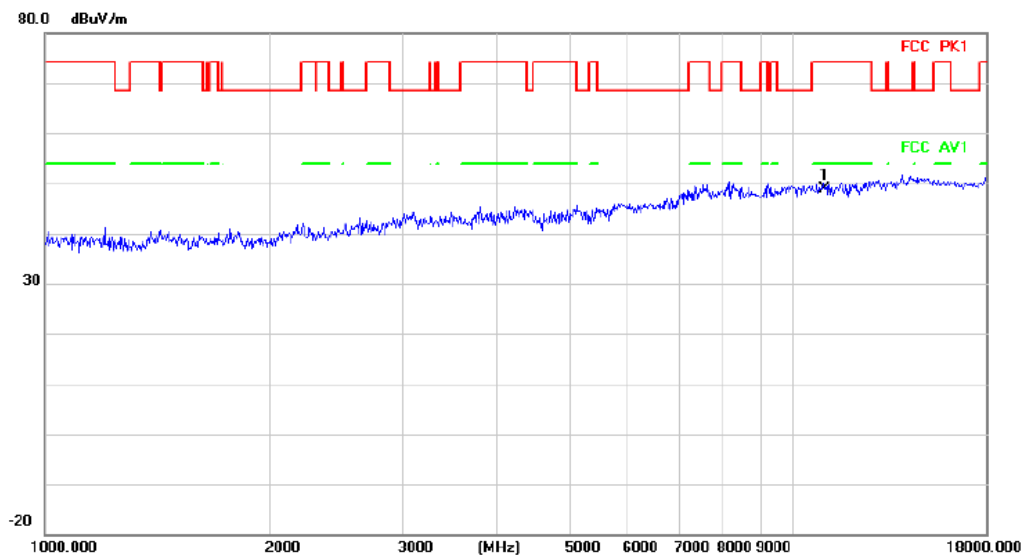

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11000.000	41.45	7.38	48.83	74.00	-25.17	peak		Comment


Radiated Emission

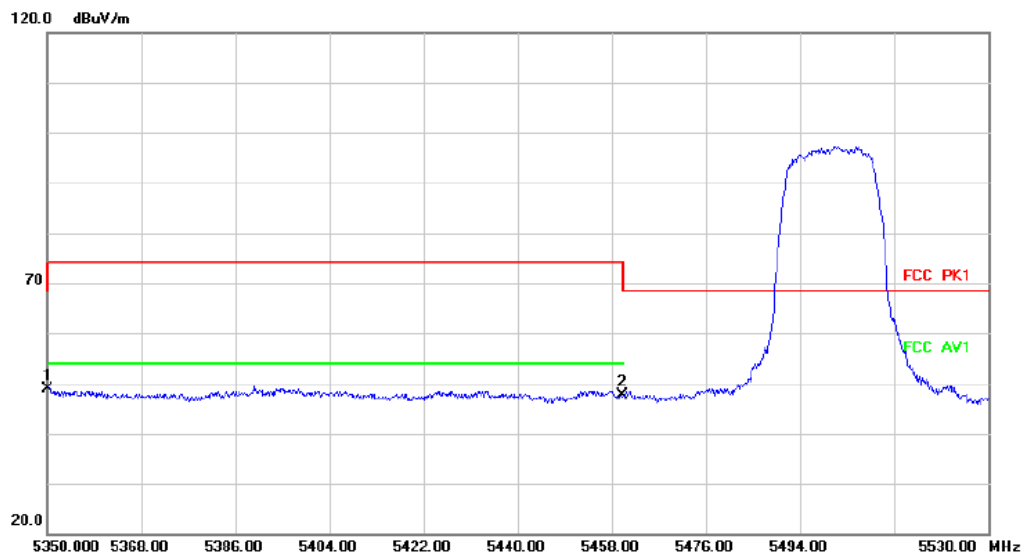

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5350.000	43.66	5.25	48.91	68.20	-19.29	peak		Comment
2		5460.000	42.54	5.03	47.57	68.20	-20.63	peak		Comment


HORIZONTAL

Radiated Emission

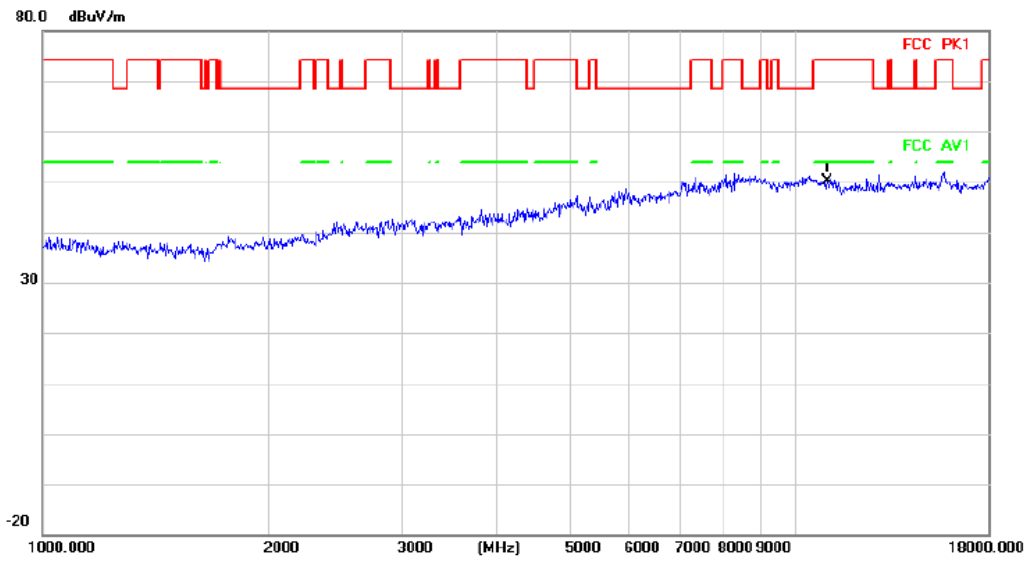

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11000.000	42.84	7.38	50.22	74.00	-23.78	peak		


Radiated Emission

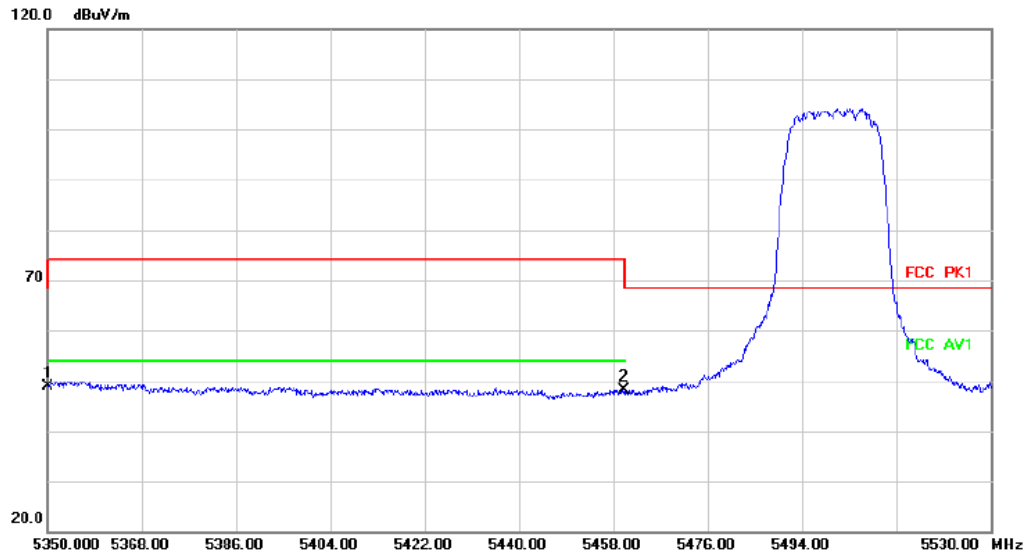

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5350.000	43.54	5.25	48.79	68.20	-19.41	peak		
2		5460.000	43.02	5.03	48.05	68.20	-20.15	peak		

VERTICAL


Radiated Emission

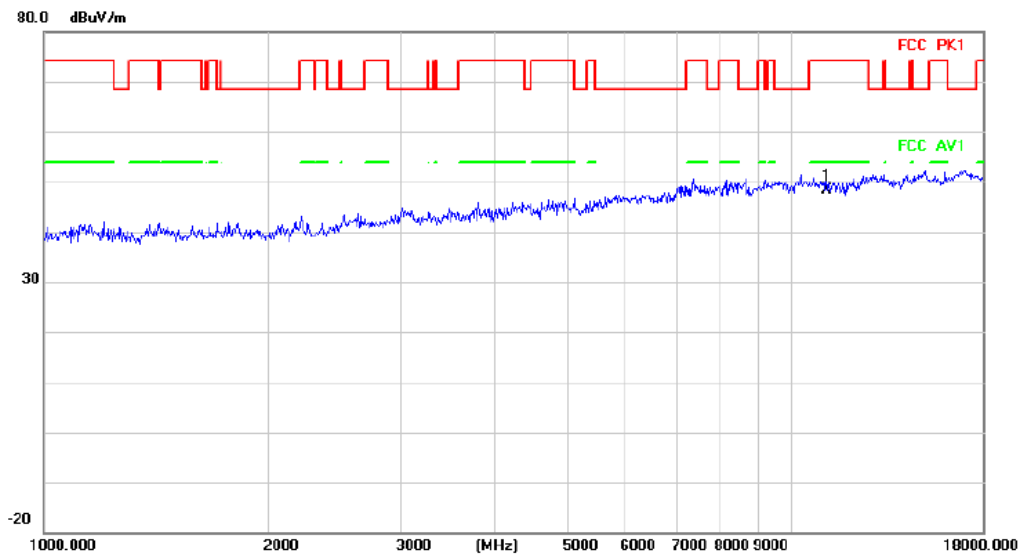

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11160.000	40.94	7.54	48.48	74.00	-25.52	peak		Comment

HORIZONTAL


Radiated Emission

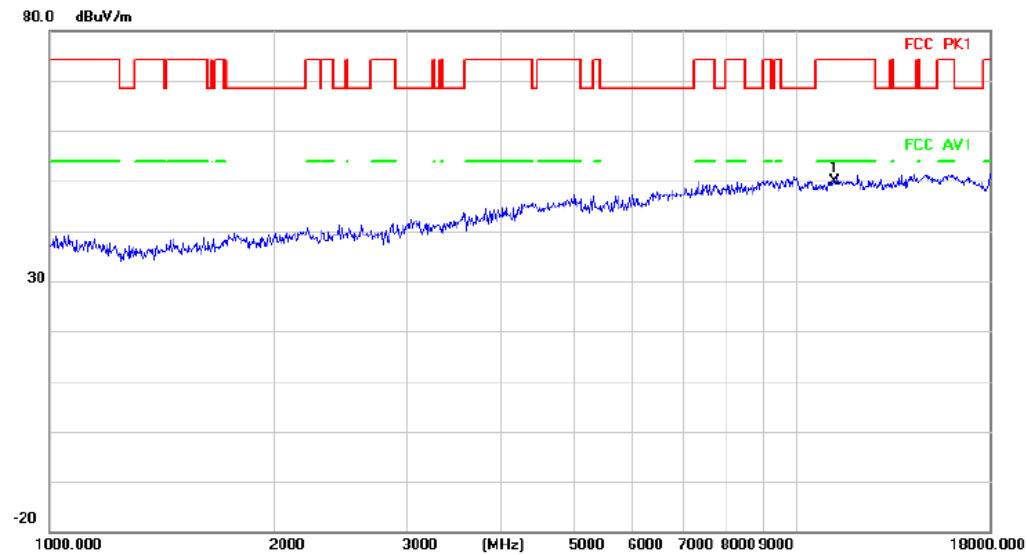

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11160.000	42.23	7.54	49.77	74.00	-24.23	peak		Comment

VERTICAL


Radiated Emission

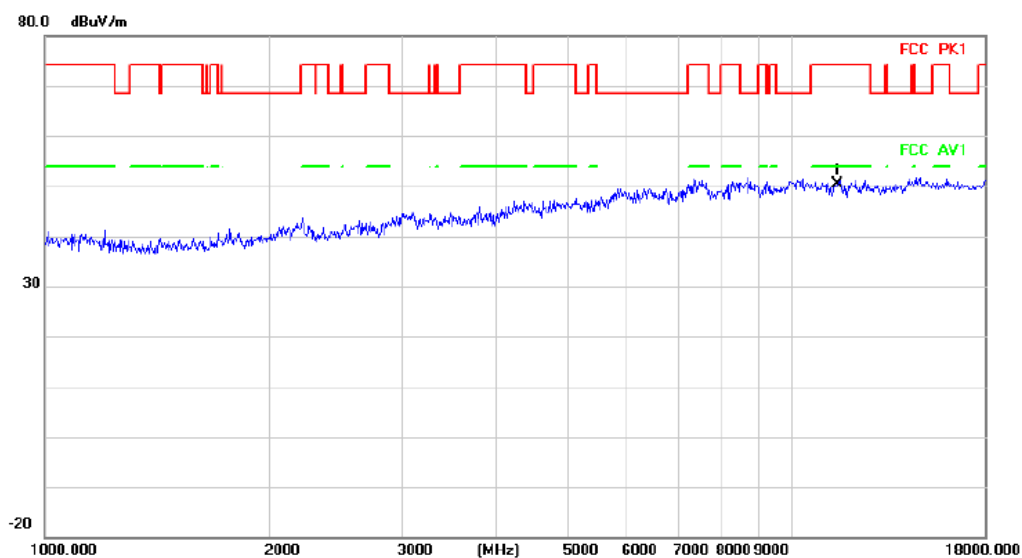

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11400.000	42.76	7.54	50.30	74.00	-23.70	peak		Comment

HORIZONTAL


Radiated Emission

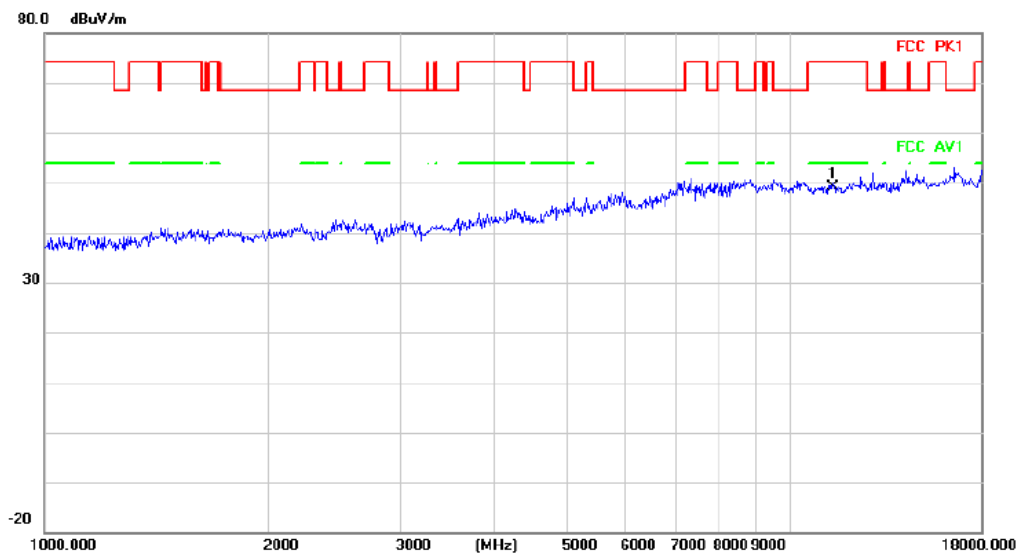

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11400.000	41.52	7.54	49.06	74.00	-24.94	peak		Comment


VERTICAL

Radiated Emission

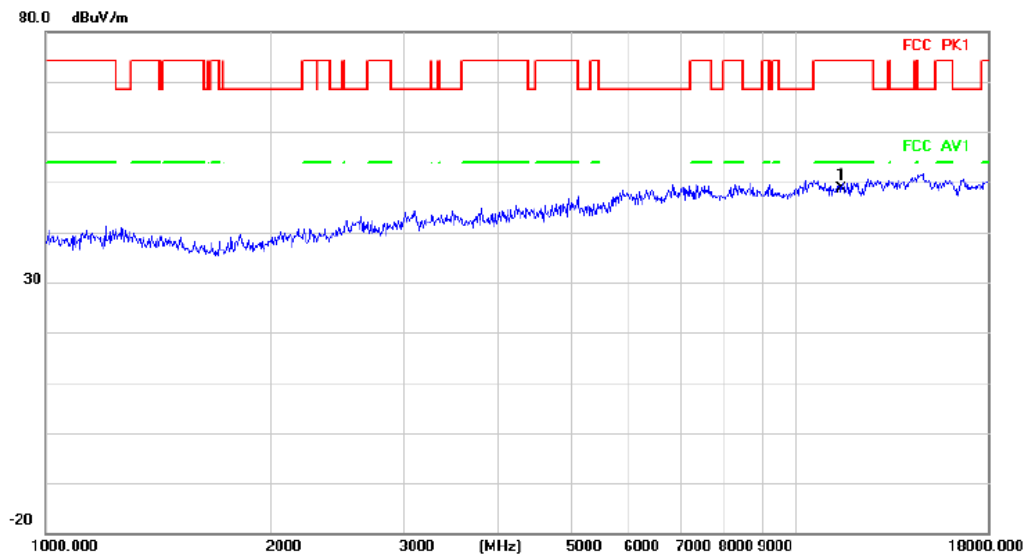

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11490.000	40.86	7.76	48.62	74.00	-25.38	peak		Comment


Radiated Emission

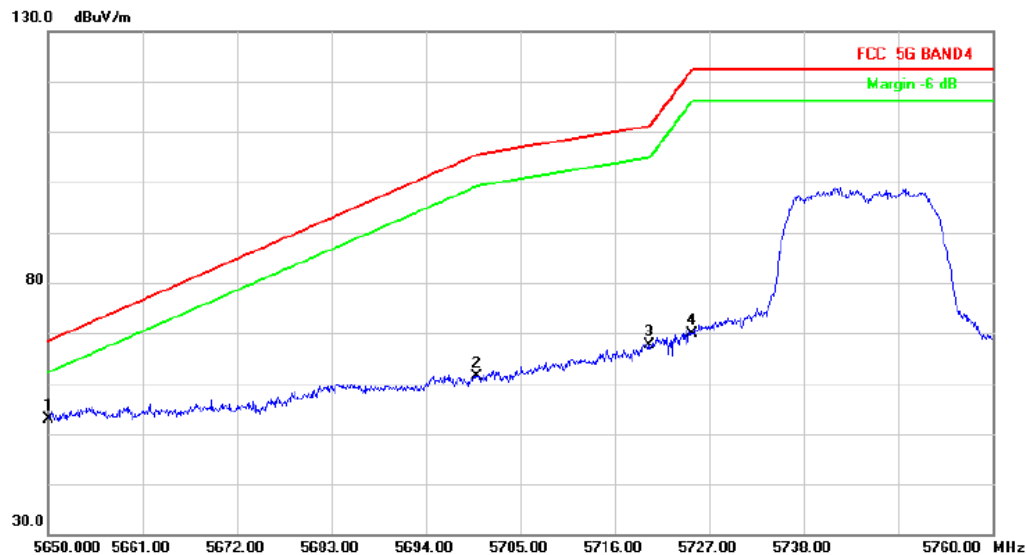

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5650.000	47.05	5.72	52.77	68.20	-15.43	peak		Comment
2		5700.000	55.39	6.00	61.39	105.20	-43.81	peak		
3		5720.000	61.74	5.82	67.56	110.80	-43.24	peak		
4		5725.000	64.11	5.78	69.89	122.20	-52.31	peak		


HORIZONTAL

Radiated Emission

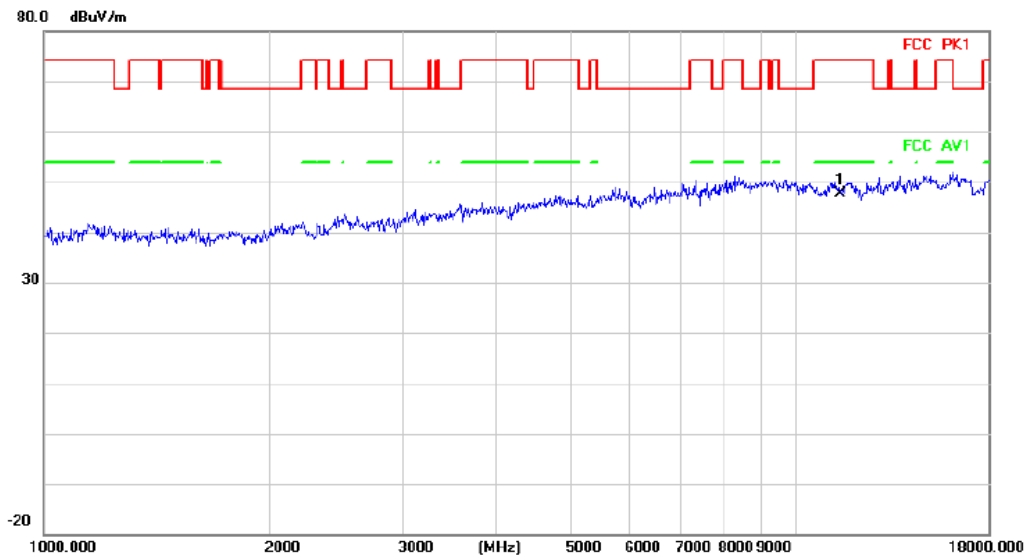

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	11490.000	39.78	7.76	47.54	74.00	-26.46	peak		


Radiated Emission

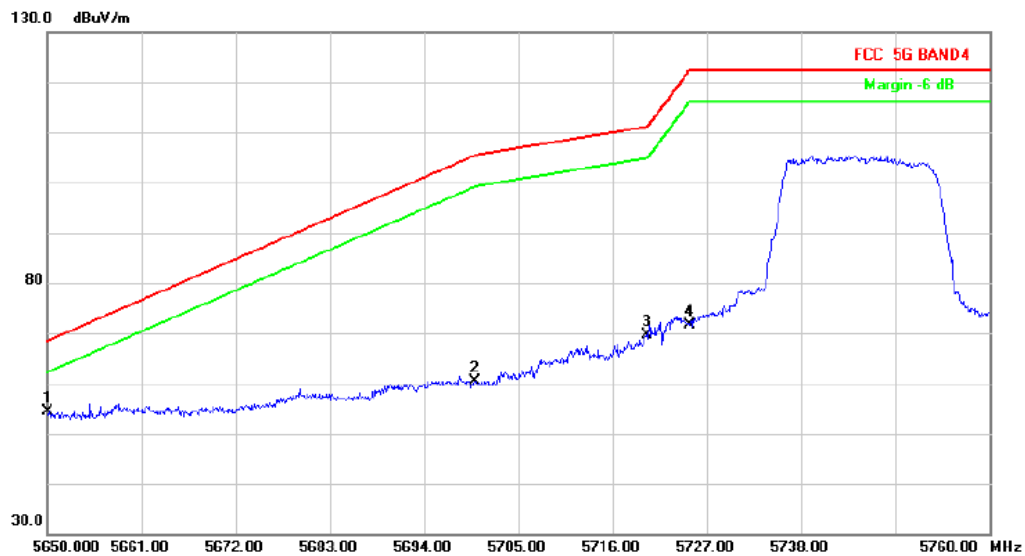

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5650.000	48.57	5.72	54.29	68.20	-13.91	peak		
2		5700.000	54.32	6.00	60.32	105.20	-44.88	peak		
3		5720.000	63.70	5.82	69.52	110.80	-41.28	peak		
4		5725.000	65.89	5.78	71.67	122.20	-50.53	peak		

VERTICAL


Radiated Emission

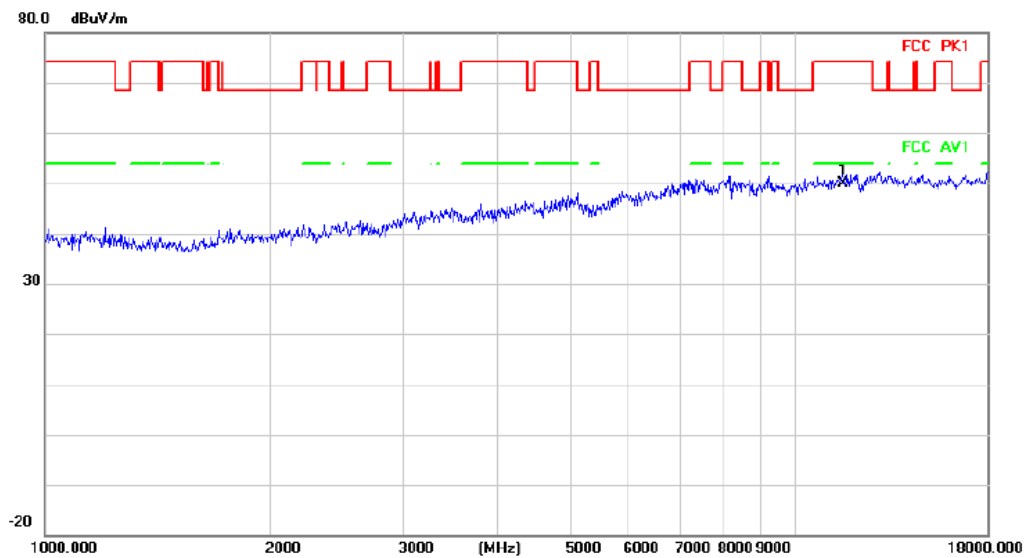

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11570.000	42.37	7.60	49.97	74.00	-24.03	peak		

HORIZONTAL


Radiated Emission

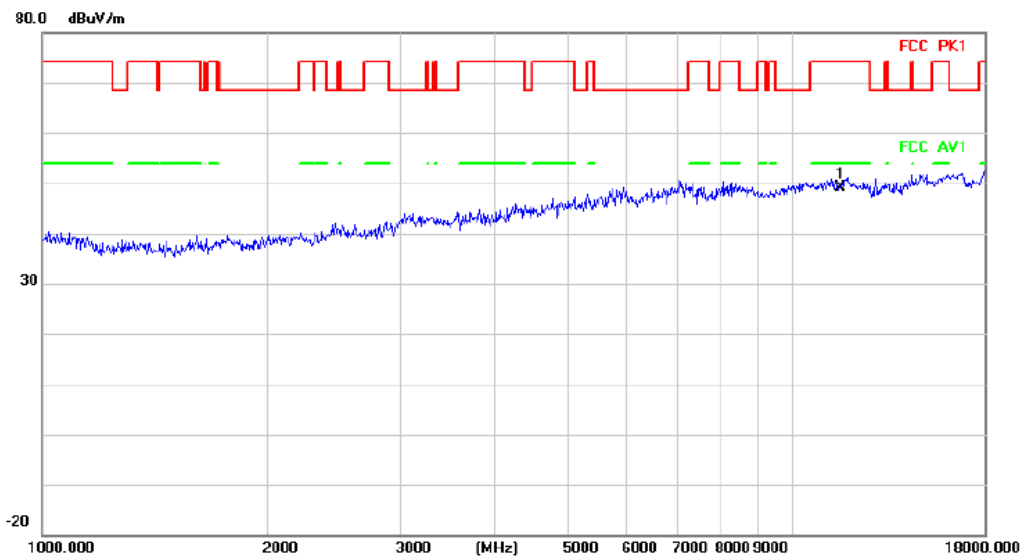

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11570.000	41.63	7.60	49.23	74.00	-24.77	peak		


VERTICAL

Radiated Emission

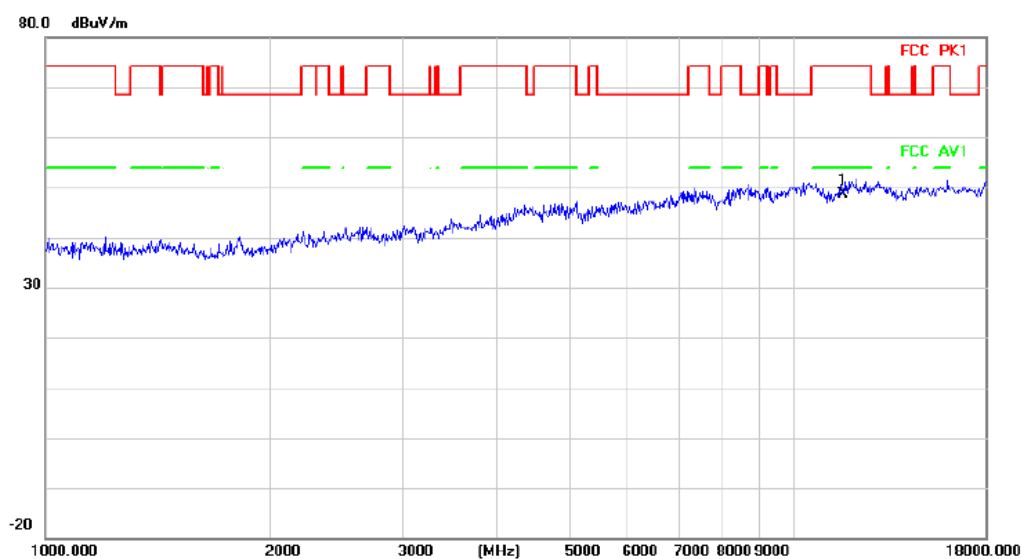

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11650.000	41.28	7.45	48.73	74.00	-25.27	peak		


Radiated Emission

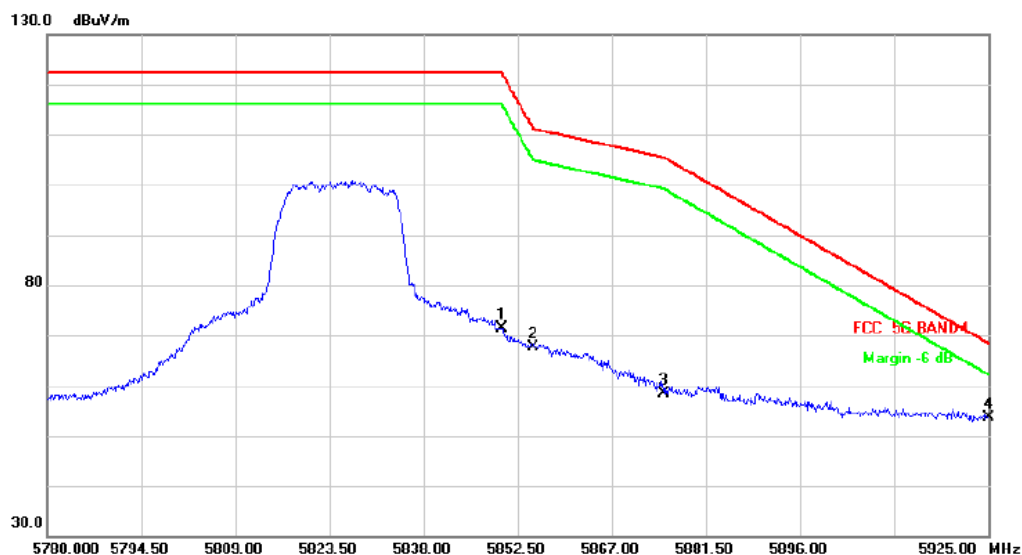

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.000	64.71	6.79	71.50	122.20	-50.70	peak		
2		5855.000	60.83	6.72	67.55	110.80	-43.25	peak		
3		5875.000	51.98	6.46	58.44	105.20	-46.76	peak		
4	*	5925.000	47.24	6.46	53.70	68.20	-14.50	peak		


HORIZONTAL

Radiated Emission

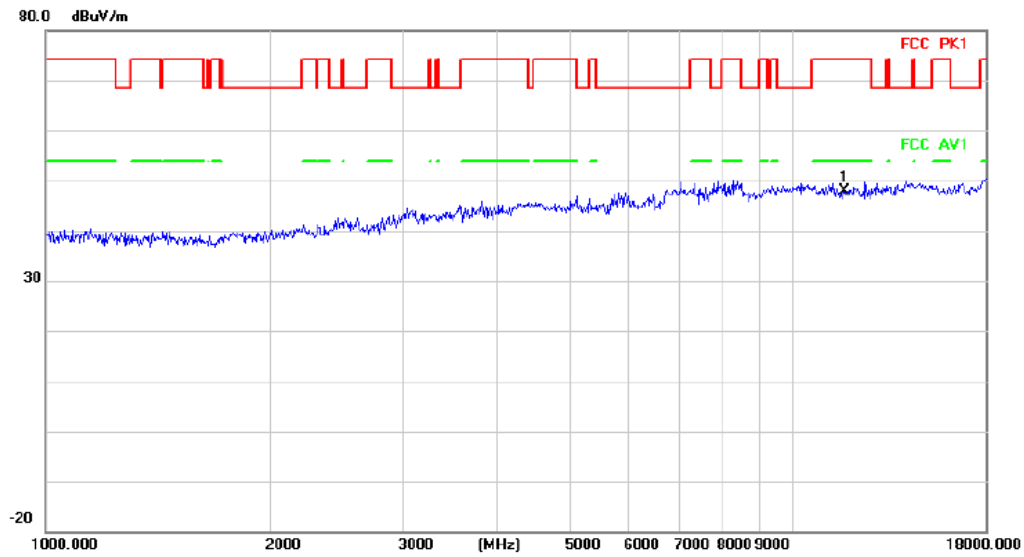

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	11650.000	40.53	7.45	47.98	74.00	-26.02	peak	


Radiated Emission

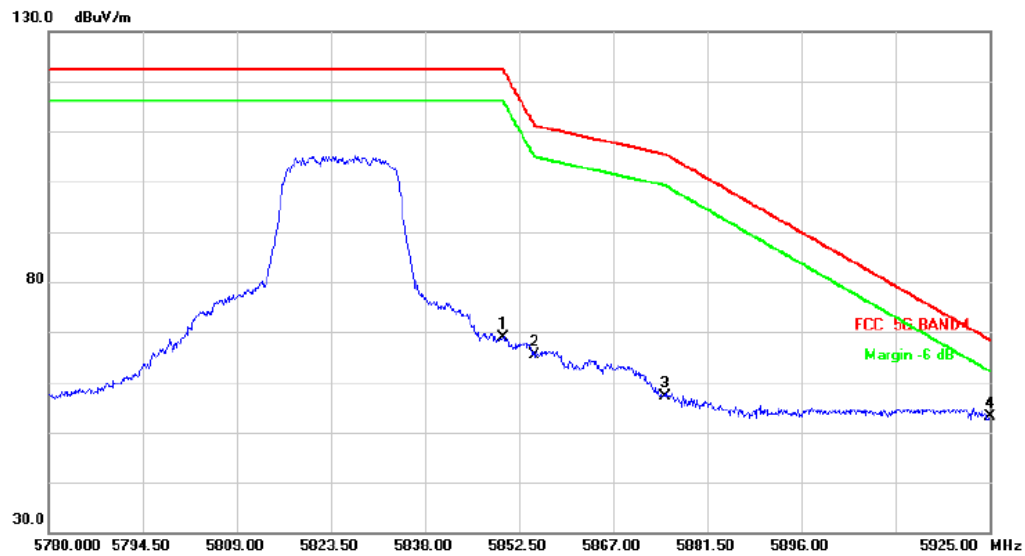

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		5850.000	62.02	6.79	68.81	122.20	-53.39	peak	
2		5855.000	58.59	6.72	65.31	110.80	-45.49	peak	
3		5875.000	50.56	6.46	57.02	105.20	-48.18	peak	
4	*	5925.000	46.55	6.46	53.01	68.20	-15.19	peak	


VERTICAL

Radiated Emission

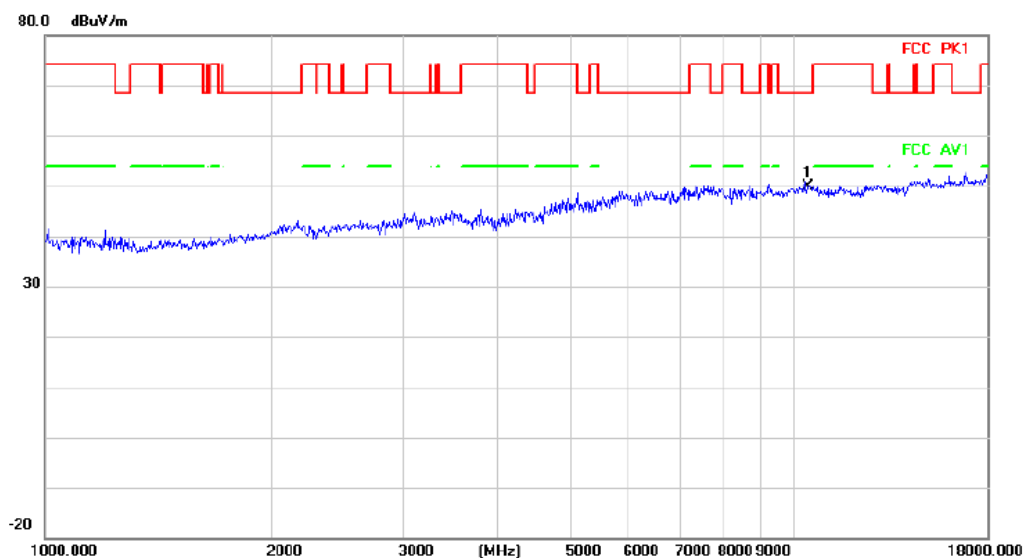

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10380.000	42.60	7.32	49.92	68.20	-18.28	peak		Comment

Radiated Emission

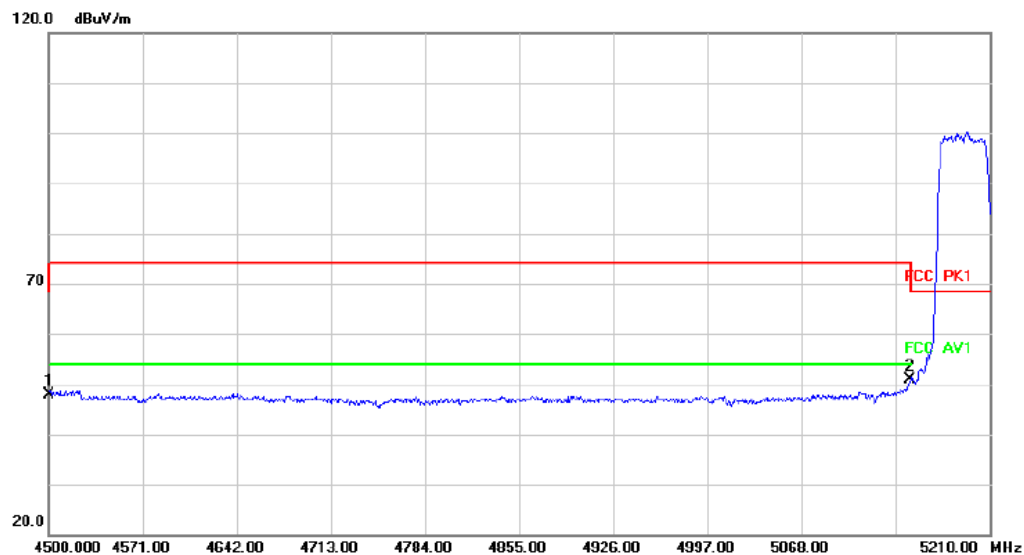

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4500.000	43.50	4.45	47.95	68.20	-20.25	peak		Comment
2	*	5150.000	44.76	6.04	50.80	68.20	-17.40	peak		Comment