

Appendix C of data

C1.Maximum Peak conducted output power


Test Result

Mode	Channel	Ant. 0 (dBm)	Limit (dBm)	Result
IEEE 802.11b	1	13.21	≤30	PASS
	6	13.16	≤30	PASS
	11	13.15	≤30	PASS
IEEE 802.11g	1	12.69	≤30	PASS
	6	12.68	≤30	PASS
	11	12.57	≤30	PASS
IEEE 802.11n_20	1	14.36	≤30	PASS
	6	14.19	≤30	PASS
	11	14.23	≤30	PASS
IEEE 802.11n_40	3	13.36	≤30	PASS
	6	13.58	≤30	PASS
	9	13.23	≤30	PASS


Test Result

Mode	Data rates	Channel	Antenna	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle (linear)	Duty Cycle Factor (dB)
IEEE 802.11b	1	1	1	8.224	8.282	99.30	0.9930	0.0305
		6		8.225	8.281	99.32	0.9932	0.0296
		11		8.224	8.282	99.30	0.9930	0.0305
IEEE 802.11g	6	1		1.367	1.419	96.33	0.9633	0.1624
		6		1.368	1.419	96.41	0.9641	0.1588
		11		1.368	1.419	96.41	0.9641	0.1588
IEEE 802.11n_20	MCS 0	1		1.155	1.207	95.69	0.9569	0.1913
		6		1.155	1.207	95.69	0.9569	0.1913
		11		1.155	1.207	95.69	0.9569	0.1913
IEEE 802.11n_40		3		0.578	0.631	91.68	0.9168	0.3773
		6		0.577	0.631	91.59	0.9159	0.3815
		9		0.578	0.630	91.68	0.9168	0.3773


Test Graphs

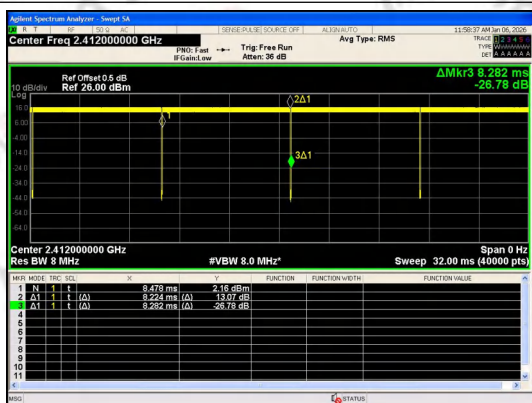


IEEE 802.11b_20MHz_Channel 1

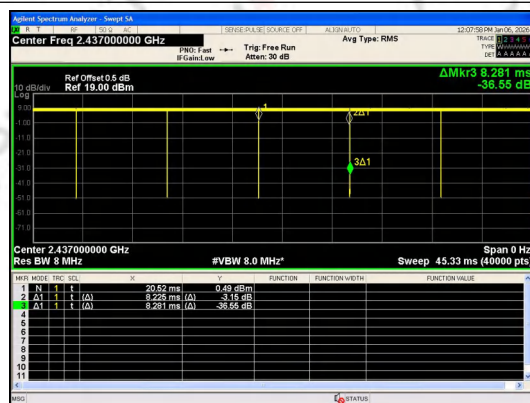


IEEE 802.11b_20MHz_Channel 6

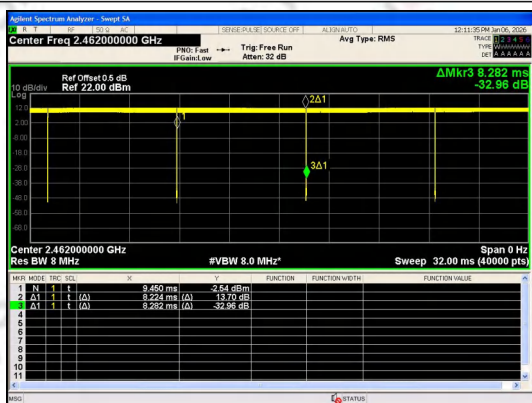


IEEE 802.11b_20MHz_Channel 11

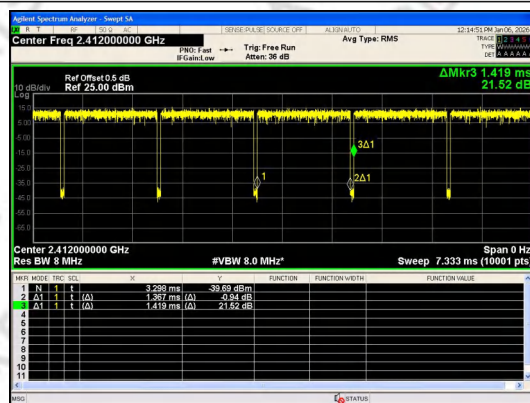


IEEE 802.11g_20MHz_Channel 1

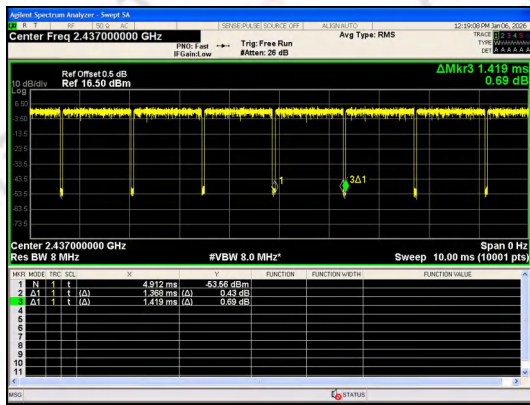


IEEE 802.11g_20MHz_Channel 6

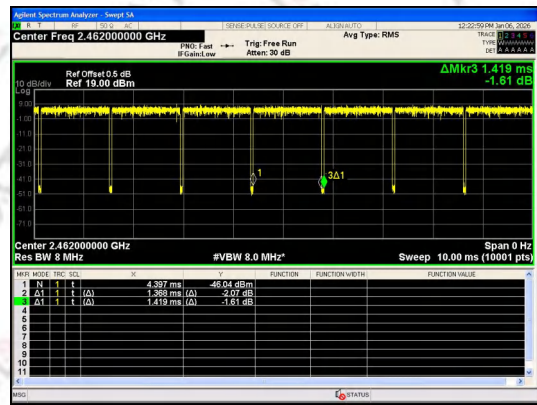


IEEE 802.11g_20MHz_Channel 11

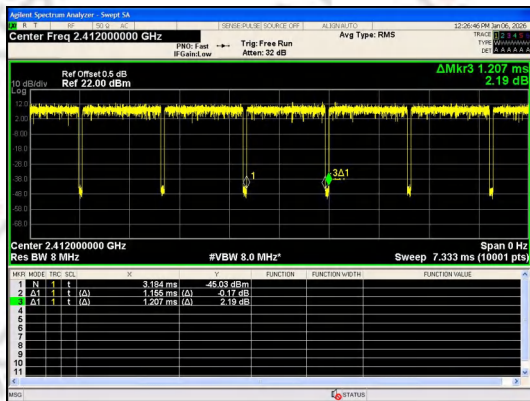


IEEE 802.11n_20MHz_Channel 1

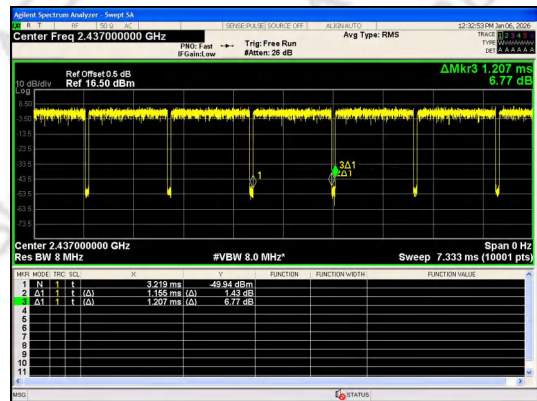


IEEE 802.11n_20MHz_Channel 6

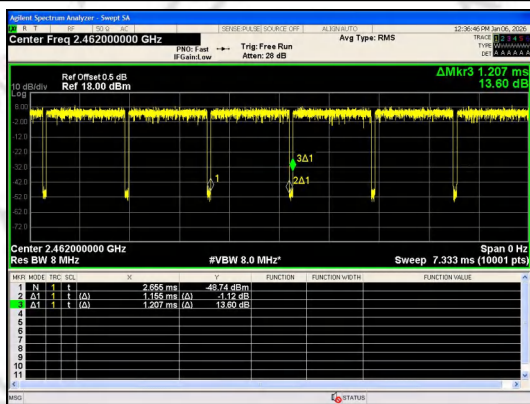


IEEE 802.11n_20MHz_Channel 11

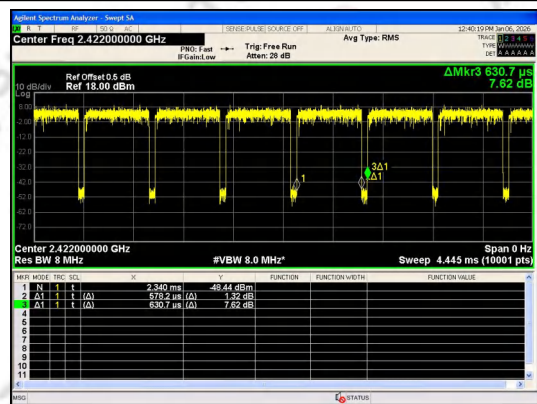

IEEE 802.11n_40MHz_Channel 3

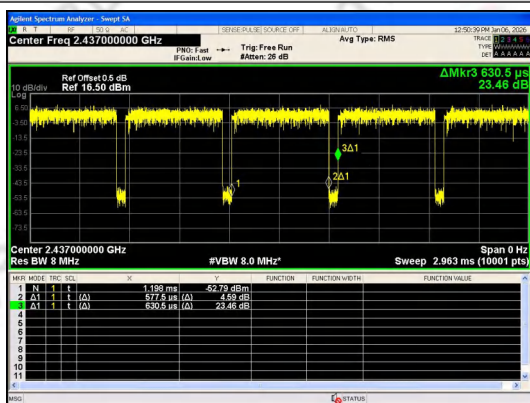

IEEE 802.11n_40MHz_Channel 6

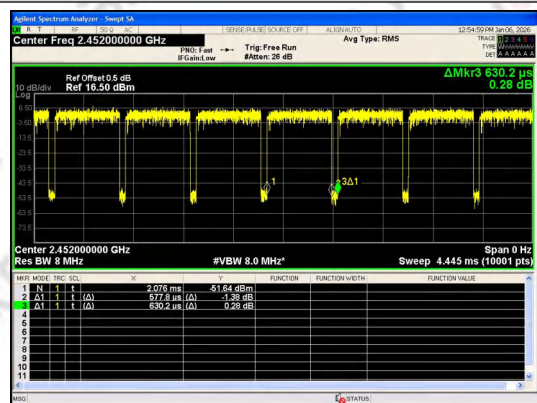

IEEE 802.11n_40MHz_Channel 9

C3.6dB Bandwidth


Test Result

Mode	Channel	Ant.	Center Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
IEEE 802.11b	1	0	2412	8.160	≥0.5	PASS
	6		2437	8.620		PASS
	11		2462	8.630		PASS
IEEE 802.11g	1		2412	15.85		PASS
	6		2437	17.41		PASS
	11		2462	16.49		PASS
IEEE 802.11n_20	1		2412	15.89		PASS
	6		2437	17.36		PASS
	11		2462	16.11		PASS
IEEE 802.11n_40	3		2422	35.76		PASS
	6		2437	35.41		PASS
	9		2452	29.40		PASS


Test Graphs




IEEE 802.11b_Channel 1_20MHz_Antenna 0

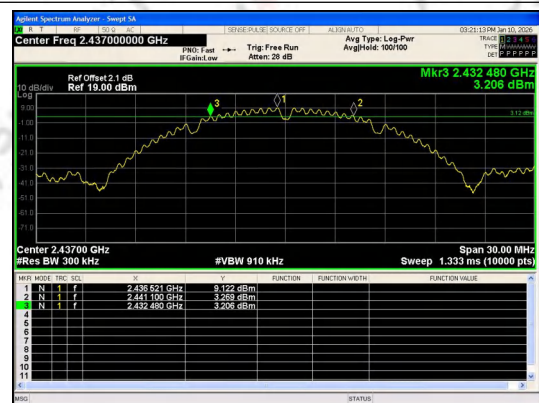


IEEE 802.11b_Channel 6_20MHz_Antenna 0

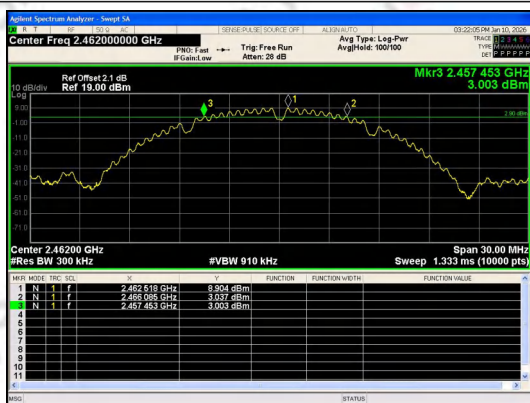


IEEE 802.11b_Channel 11_20MHz_Antenna 0

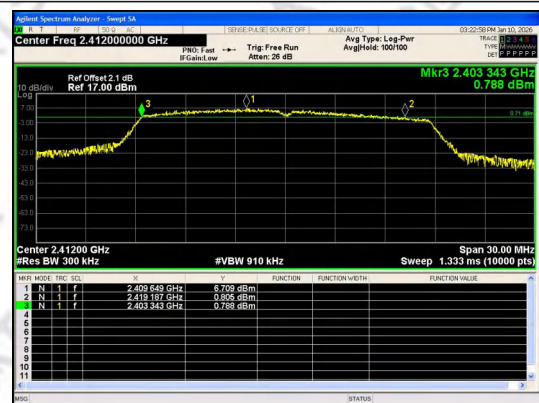

IEEE 802.11g_Channel 1_20MHz_Antenna 0

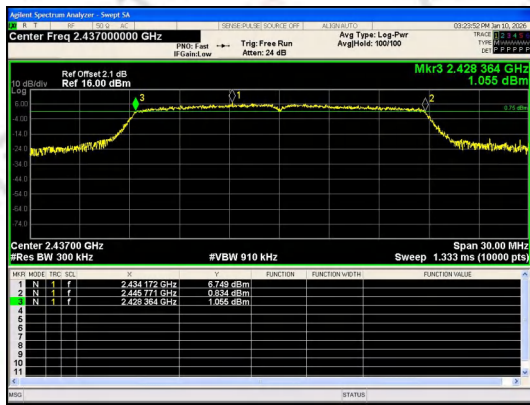

IEEE 802.11g_Channel 6_20MHz_Antenna 0

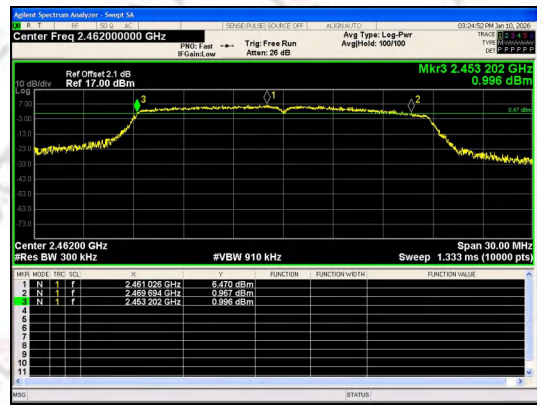


IEEE 802.11g_Channel 11_20MHz_Antenna 0




IEEE 802.11n_Channel 1_20MHz_Antenna 0




IEEE 802.11n_Channel 6_20MHz_Antenna 0

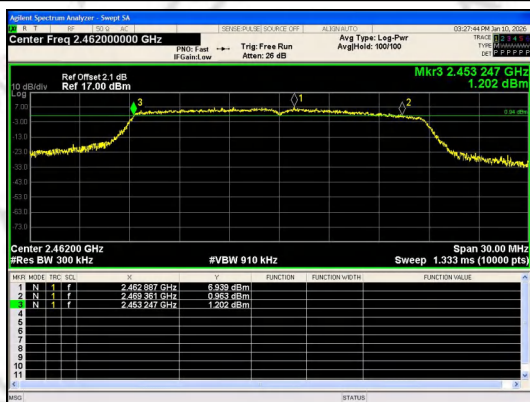


IEEE 802.11n_Channel 11_20MHz_Antenna 0

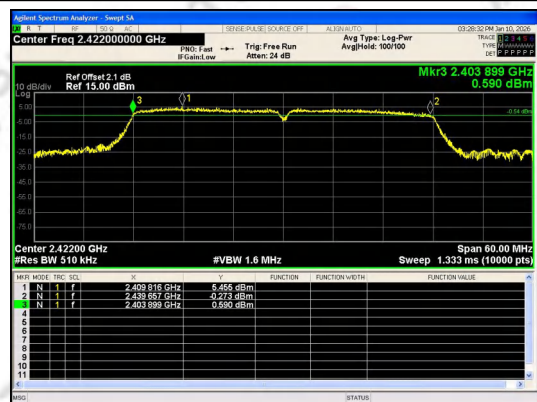

IEEE 802.11n_Channel 3_40MHz_Antenna 0

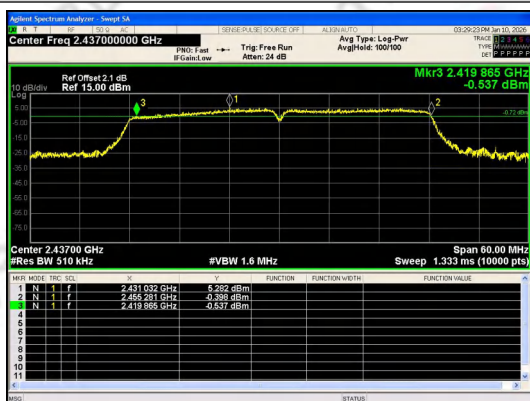

IEEE 802.11n_Channel 6_40MHz_Antenna 0

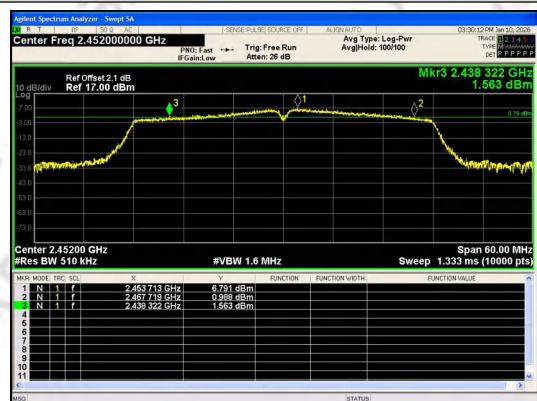


IEEE 802.11n_Channel 9_40MHz_Antenna 0

C4.Power Spectral Density

Test Result


Mode	Channel	PSD (dBm/3kHz) Ant. 0	Limit (dBm/3kHz)	Result
IEEE 802.11b	1	-4.130	≤8	PASS
	6	-12.610		PASS
	11	-8.910		PASS
IEEE 802.11g	1	-12.880		PASS
	6	-20.390		PASS
	11	-17.300		PASS
IEEE 802.11n_20	1	-12.270		PASS
	6	-20.260		PASS
	11	-17.370		PASS
IEEE 802.11n_40	3	-17.060		PASS
	6	-18.820		PASS
	9	-19.360		PASS

Test Graphs

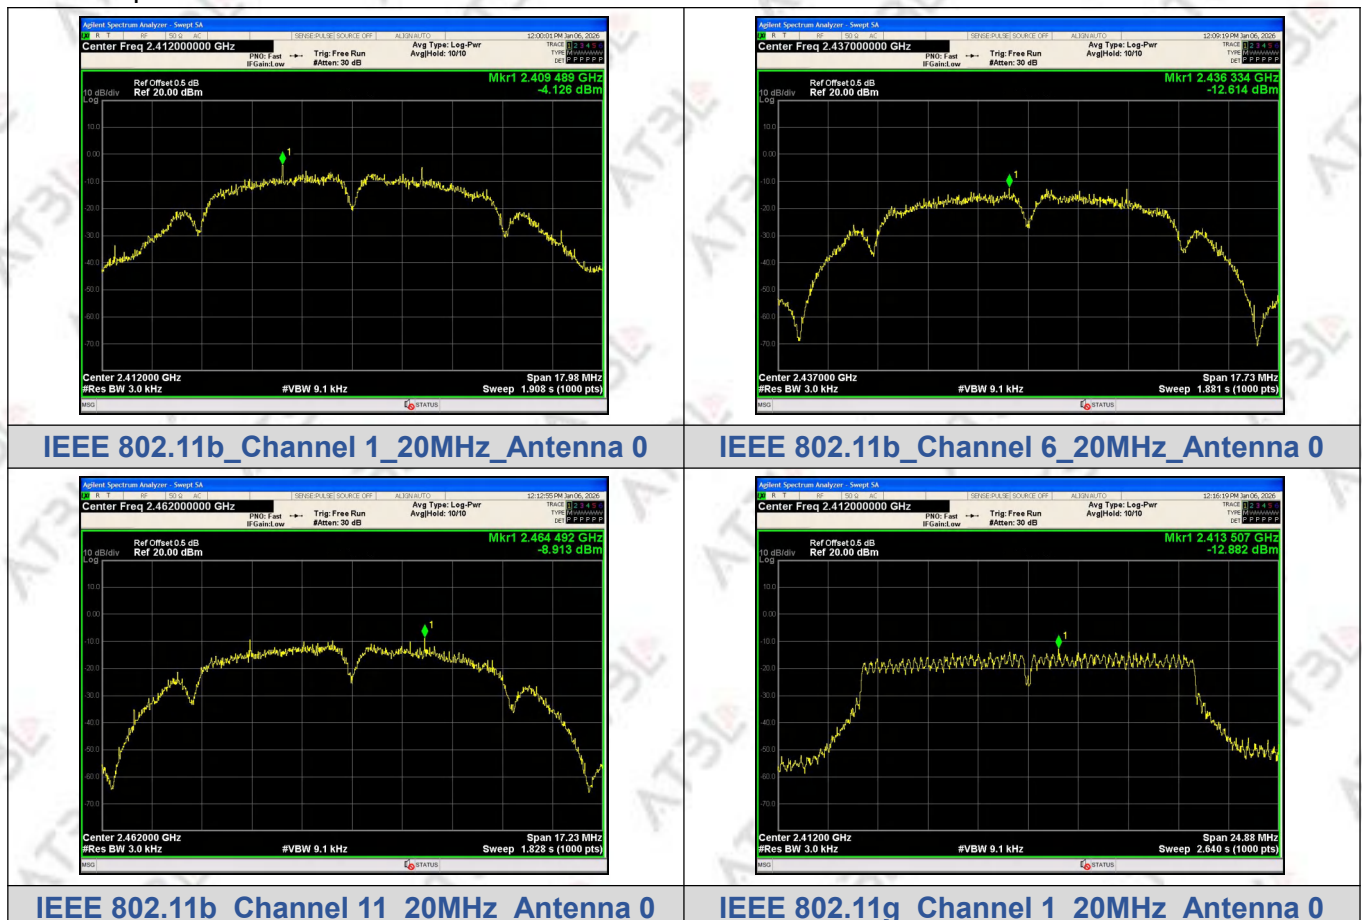





IEEE 802.11g_Channel 6_20MHz_Antenna 0

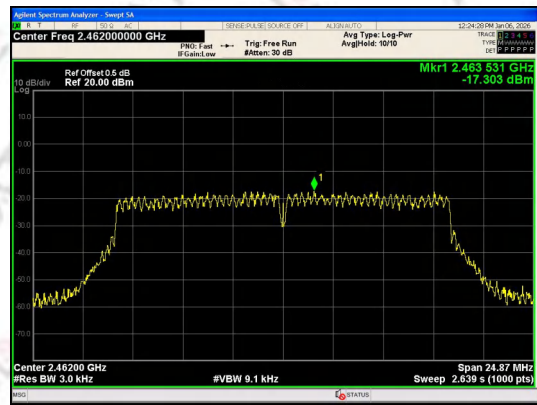


IEEE 802.11g_Channel 11_20MHz_Antenna 0

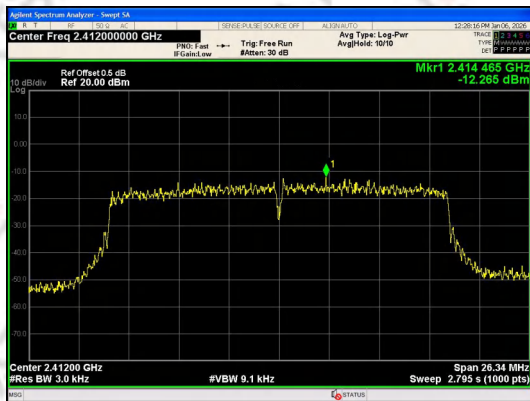


IEEE 802.11n_Channel 1_20MHz_Antenna 0

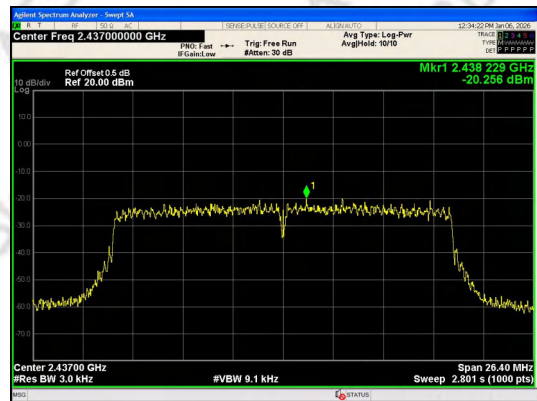


IEEE 802.11n_Channel 6_20MHz_Antenna 0

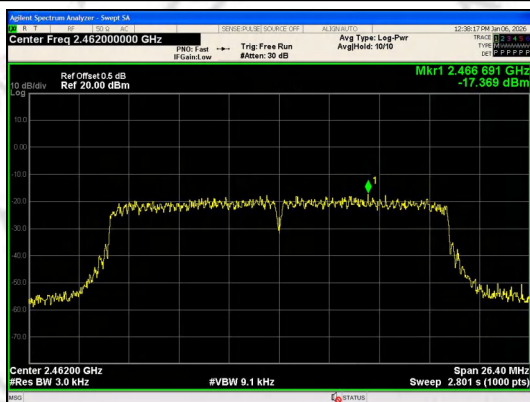


IEEE 802.11n_Channel 11_20MHz_Antenna 0

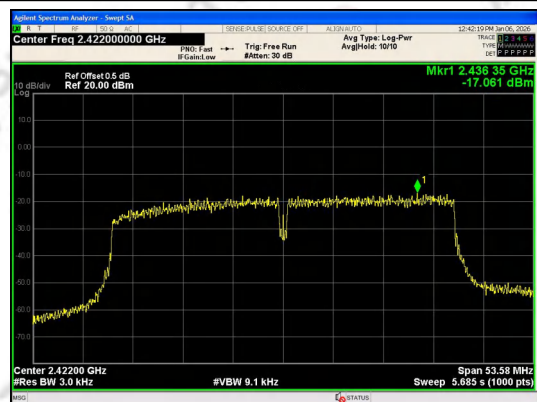

IEEE 802.11n_Channel 3_40MHz_Antenna 0

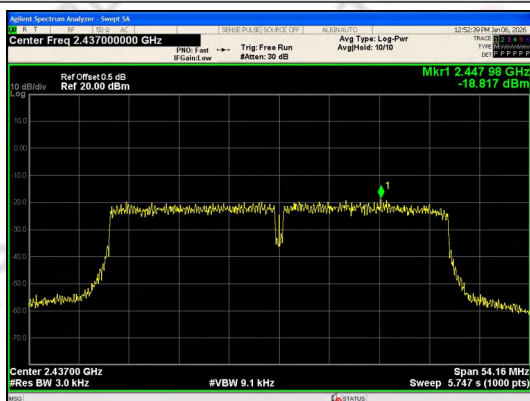

IEEE 802.11n_Channel 6_40MHz_Antenna 0

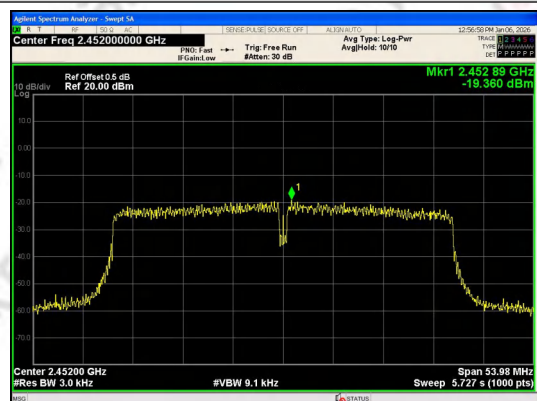

IEEE 802.11n_Channel 9_40MHz_Antenna 0


C5.Conducted Band Edge and Conducted Spurious Emission

Test Result


Mode	Channel	Ant.	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	
IEEE 802.11b	1	0	2400.00	-31.284	-12.29	-18.994	PASS	
			23737.8	-38.858	-12.29	-26.569	PASS	
	6		23700.3	-38.711	-19.38	-19.331	PASS	
	11		2483.50	-48.979	-16.26	-32.719	PASS	
			24559.3	-37.750	-16.26	-21.490	PASS	
IEEE 802.11g	1		2398.92	-34.432	-18.94	-15.492	PASS	
			2400.00	-34.662	-18.94	-15.722	PASS	
			23624.2	-38.258	-18.94	-19.318	PASS	
	6		23694.1	-38.443	-25.73	-12.713	PASS	
			11	2483.50	-42.091	-22.26	-19.831	PASS
				23725.9	-38.359	-22.26	-16.099	PASS
IEEE 802.11n_20	1	2400.00	-31.837	-19.03	-12.807	PASS		
		23686.0	-38.838	-19.03	-19.808	PASS		
	6	24076.7	-38.943	-26.48	-12.463	PASS		
	11	2483.50	-42.405	-23.29	-19.115	PASS		
		24539.9	-38.831	-23.29	-15.541	PASS		
IEEE 802.11n_40	3	2398.53	-40.525	-22.5	-18.025	PASS		
		2400.00	-42.884	-22.5	-20.384	PASS		
		24209.7	-37.593	-22.5	-15.093	PASS		
	6	24051.8	-38.909	-24.73	-14.179	PASS		
	9	2483.50	-43.113	-24.81	-18.303	PASS		
		23680.3	-37.642	-24.81	-12.832	PASS		
Note: input compensation coefficient (dB)= Cable Loss (dB)								

Note: input compensation coefficient (dB)= Cable Loss (dB)


Test Graphs

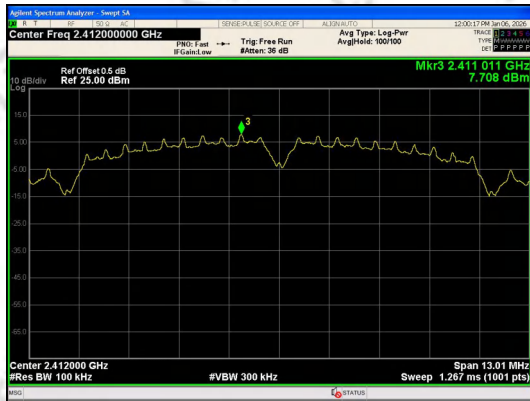


In-Band Reference Level
IEEE 802.11b_Channel 1_20MHz_Antenna 0

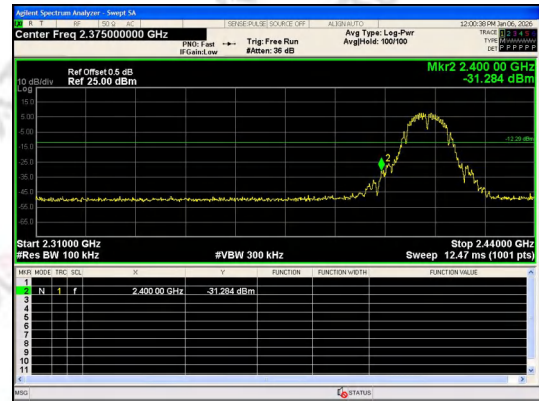


Out Of Band Emission
IEEE 802.11b_Channel 1_20MHz_Antenna 0

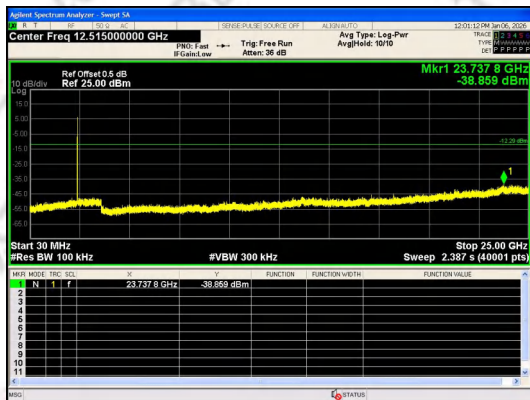

30.0 MHz - 25000.0 MHz
IEEE 802.11b_Channel 1_20MHz_Antenna 0

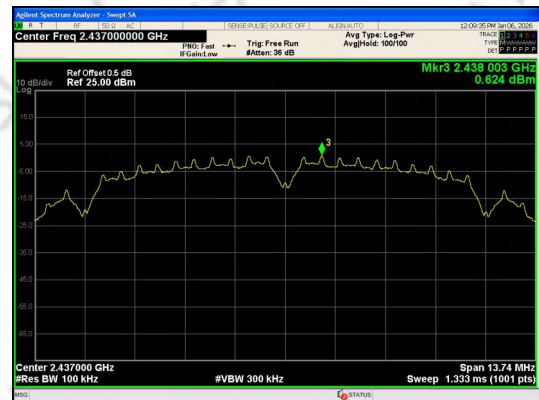


In-Band Reference Level
IEEE 802.11b_Channel 6_20MHz_Antenna 0

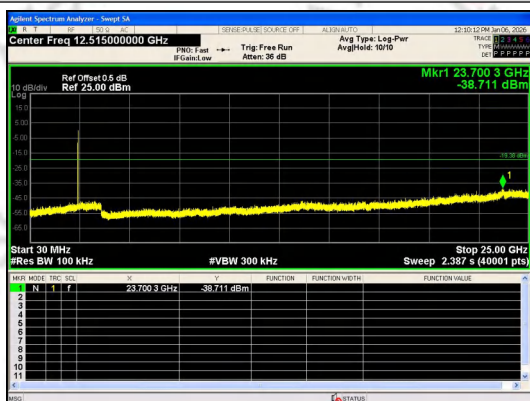


30.0 MHz - 25000.0 MHz
IEEE 802.11b_Channel 6_20MHz_Antenna 0



In-Band Reference Level
IEEE 802.11b_Channel 11_20MHz_Antenna 0

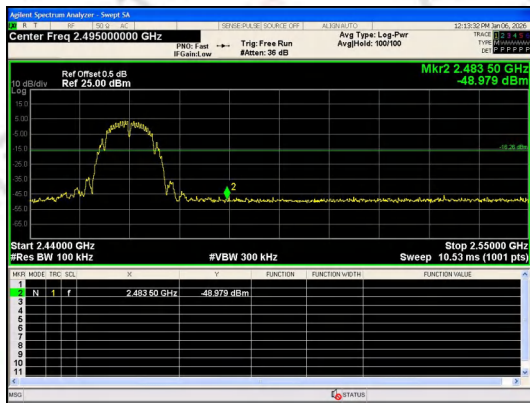


Out Of Band Emission
IEEE 802.11b_Channel 11_20MHz_Antenna 0

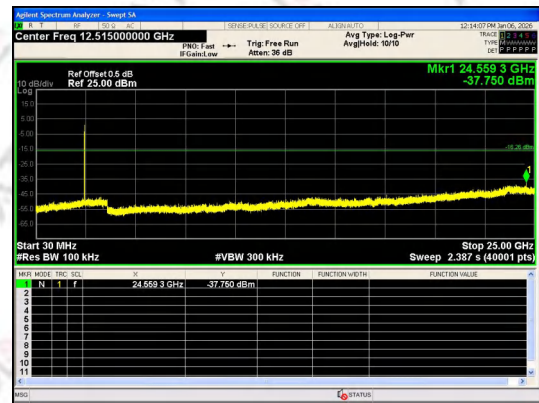


30.0 MHz - 25000.0 MHz
IEEE 802.11b_Channel 11_20MHz_Antenna 0




In-Band Reference Level
IEEE 802.11g_Channel 1_20MHz_Antenna 0

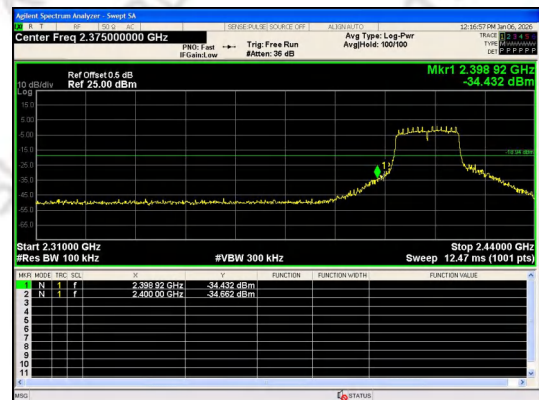


Out Of Band Emission
IEEE 802.11g_Channel 1_20MHz_Antenna 0

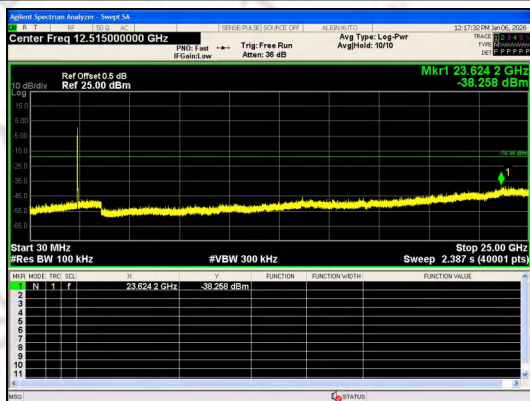


30.0 MHz - 25000.0 MHz
IEEE 802.11g_Channel 1_20MHz_Antenna 0

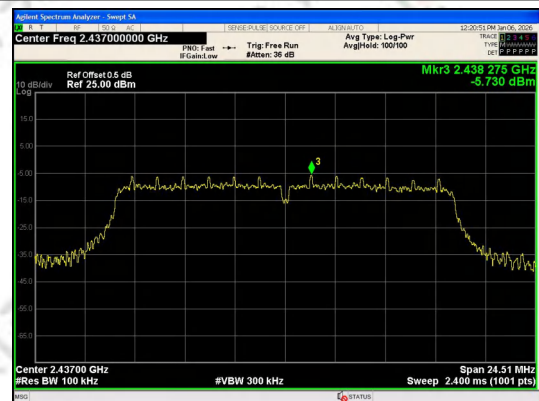


In-Band Reference Level
IEEE 802.11g_Channel 6_20MHz_Antenna 0

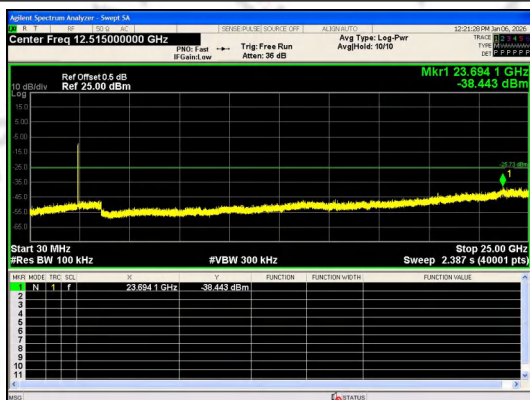

30.0 MHz - 25000.0 MHz IEEE 802.11g_Channel 6_20MHz_Antenna 0

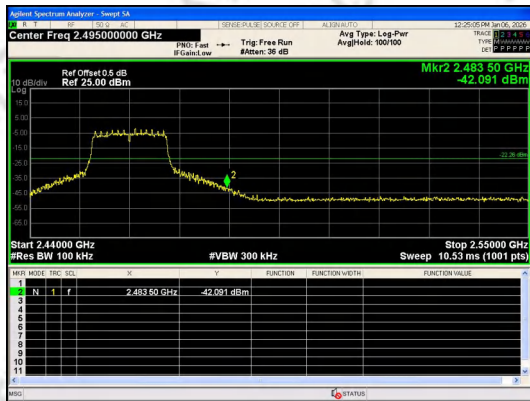


In-Band Reference Level IEEE 802.11g_Channel 11_20MHz_Antenna 0

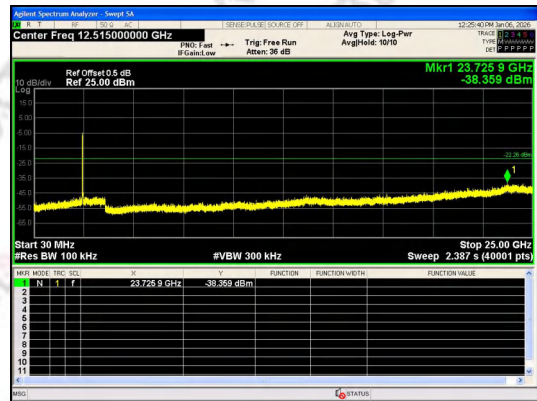


Out Of Band Emission IEEE 802.11g_Channel 11_20MHz_Antenna 0



30.0 MHz - 25000.0 MHz IEEE 802.11g_Channel 11_20MHz_Antenna 0

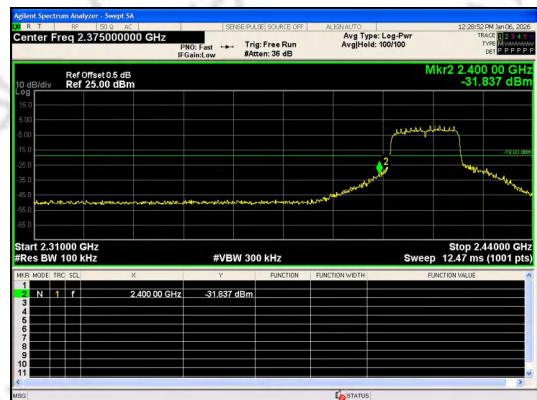

In-Band Reference Level IEEE 802.11n_Channel 1_20MHz_Antenna 0

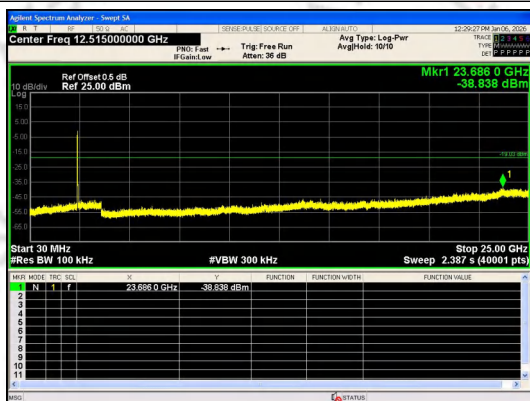


Out Of Band Emission IEEE 802.11n_Channel 1_20MHz_Antenna 0




30.0 MHz - 25000.0 MHz IEEE 802.11n_Channel 1_20MHz_Antenna 0


In-Band Reference Level IEEE 802.11n_Channel 6_20MHz_Antenna 0

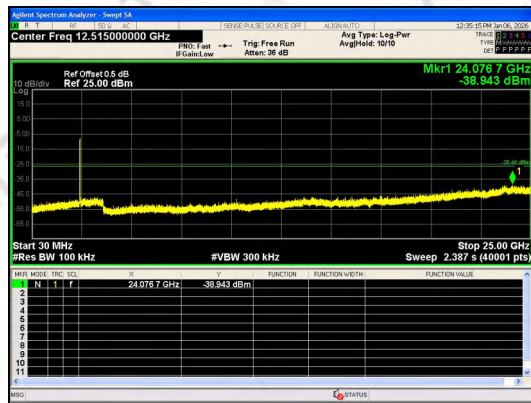


30.0 MHz - 25000.0 MHz
IEEE 802.11n_Channel 6_20MHz_Antenna 0

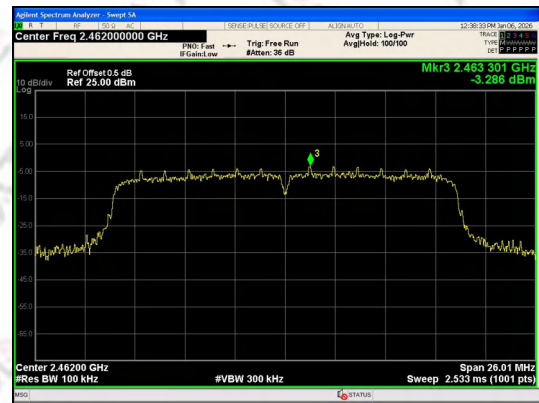


In-Band Reference Level
IEEE 802.11n_Channel 11_20MHz_Antenna 0

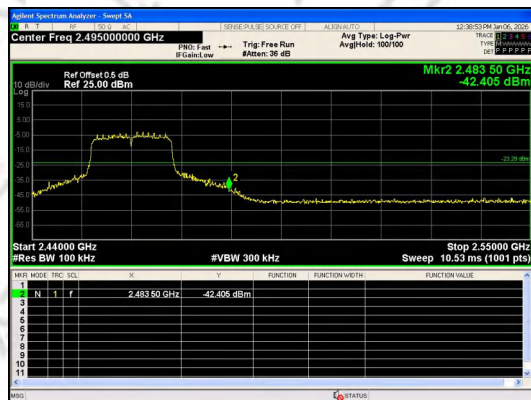


Out Of Band Emission
IEEE 802.11n_Channel 11_20MHz_Antenna 0

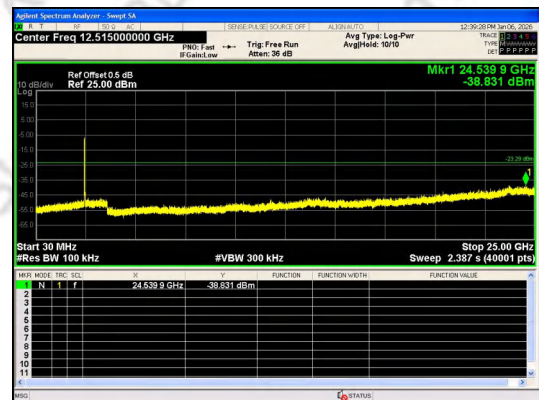


30.0 MHz - 25000.0 MHz
IEEE 802.11n_Channel 11_20MHz_Antenna 0

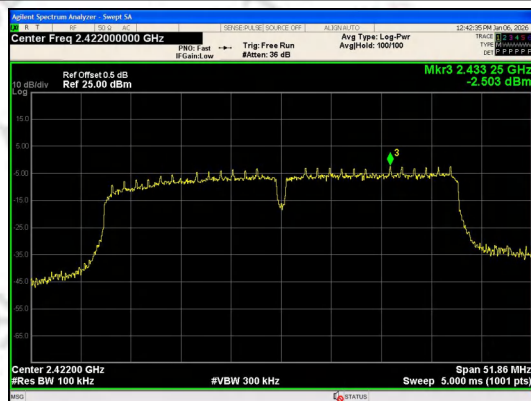


In-Band Reference Level
IEEE 802.11n_Channel 3_40MHz_Antenna 0

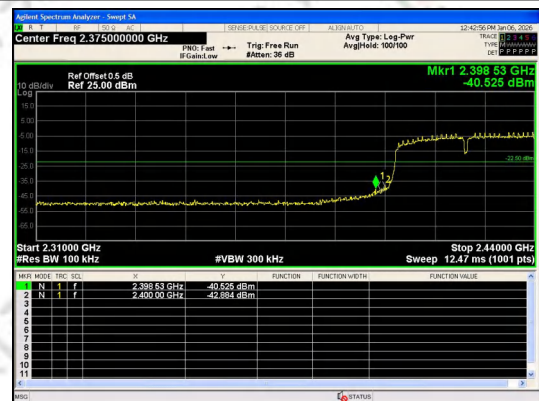

Out Of Band Emission
IEEE 802.11n_Channel 3_40MHz_Antenna 0

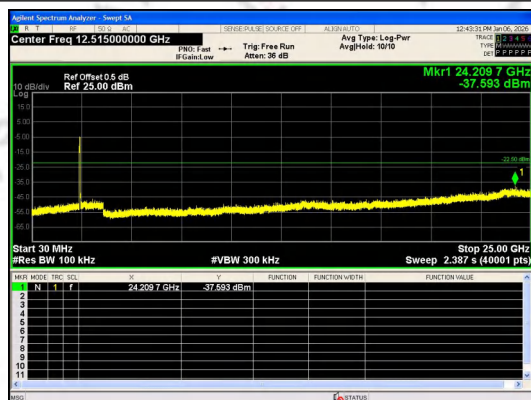


30.0 MHz - 25000.0 MHz IEEE 802.11n_Channel 3_40MHz_Antenna 0

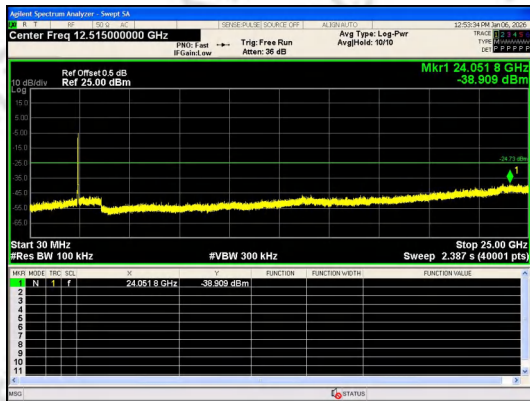


In-Band Reference Level IEEE 802.11n_Channel 6_40MHz_Antenna 0



30.0 MHz - 25000.0 MHz IEEE 802.11n_Channel 6_40MHz_Antenna 0

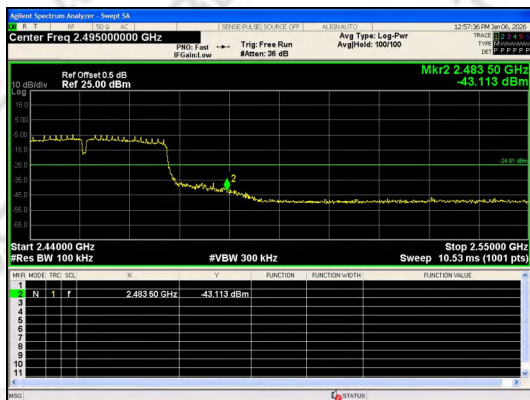

In-Band Reference Level IEEE 802.11n_Channel 9_40MHz_Antenna 0

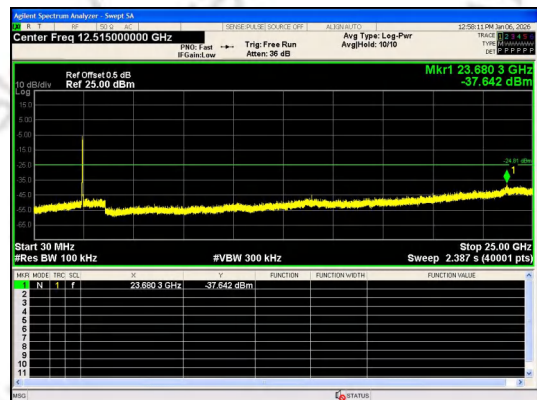

Out Of Band Emission IEEE 802.11n_Channel 9_40MHz_Antenna 0

30.0 MHz - 25000.0 MHz IEEE 802.11n_Channel 9_40MHz_Antenna 0

C6.Radiated Spurious Emission and Restricted Band

For 9 kHz ~ 30 MHz


Note:


- 1.The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.
- 2.The all data rate modes had been test, but only worse test data was recorded in the test report.

Below 1GHz:

Note:

- 1.All modes have been tested, only worst (802.11n20-TX Channel 1)mode was recorded in the test report.
- 2.Emission Level (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).
- 3.Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)-Amplifier Gain.
- 4.The emission levels of other frequencies were less than 20dB margin against the limit.
- 5.Margin value = Emission level-Limit value.

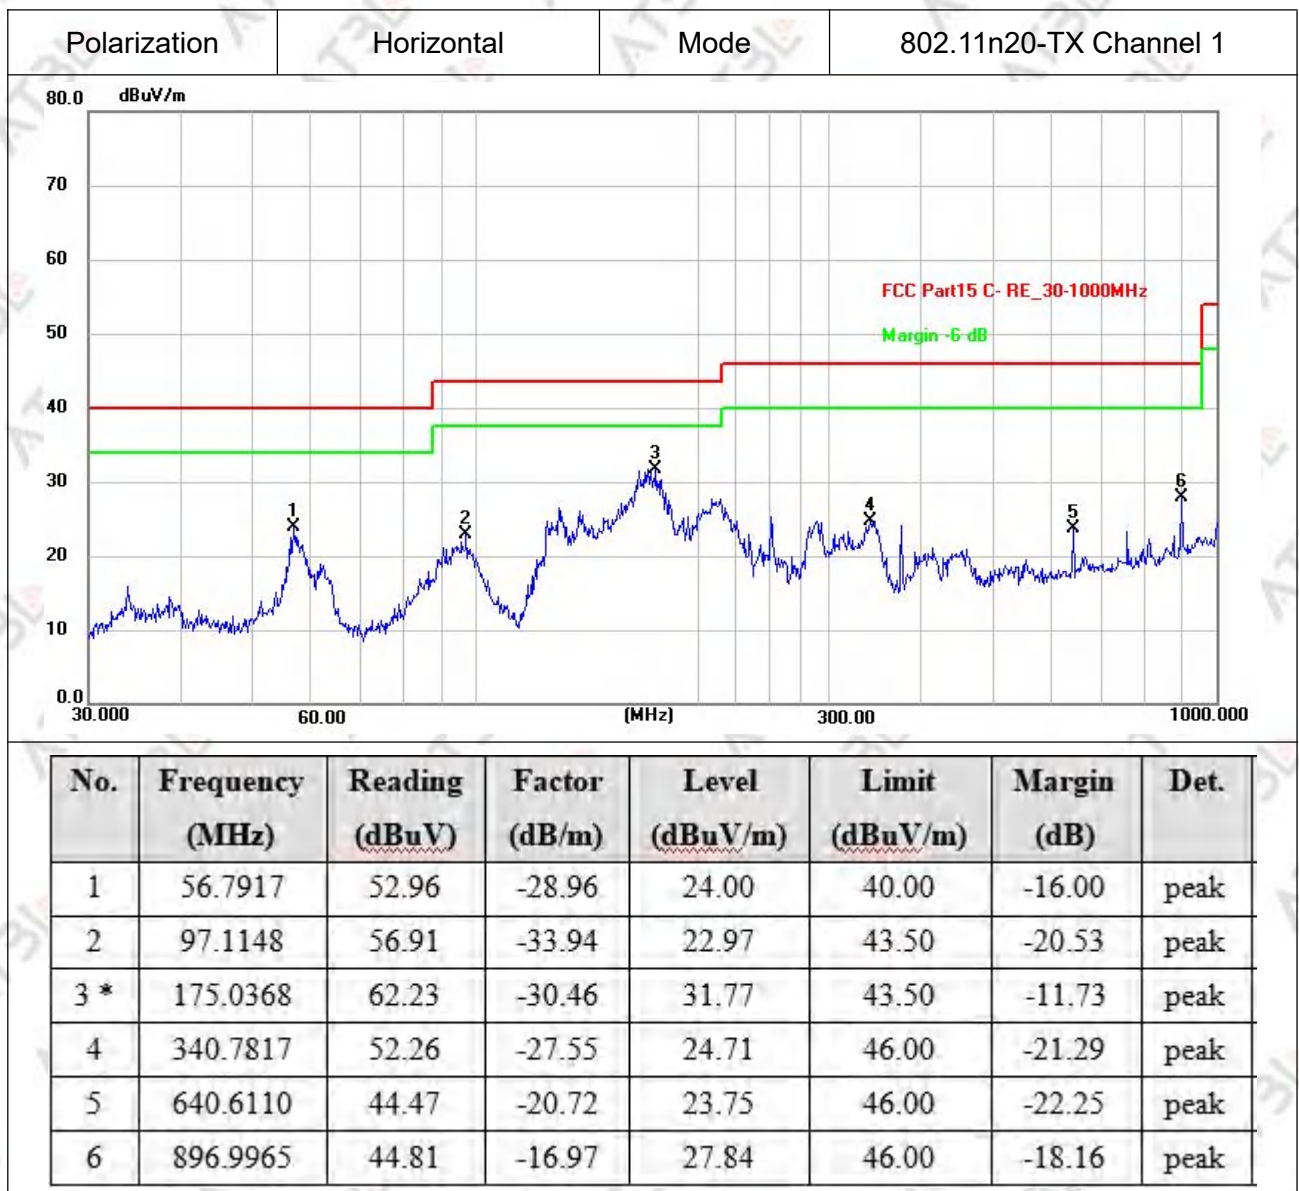

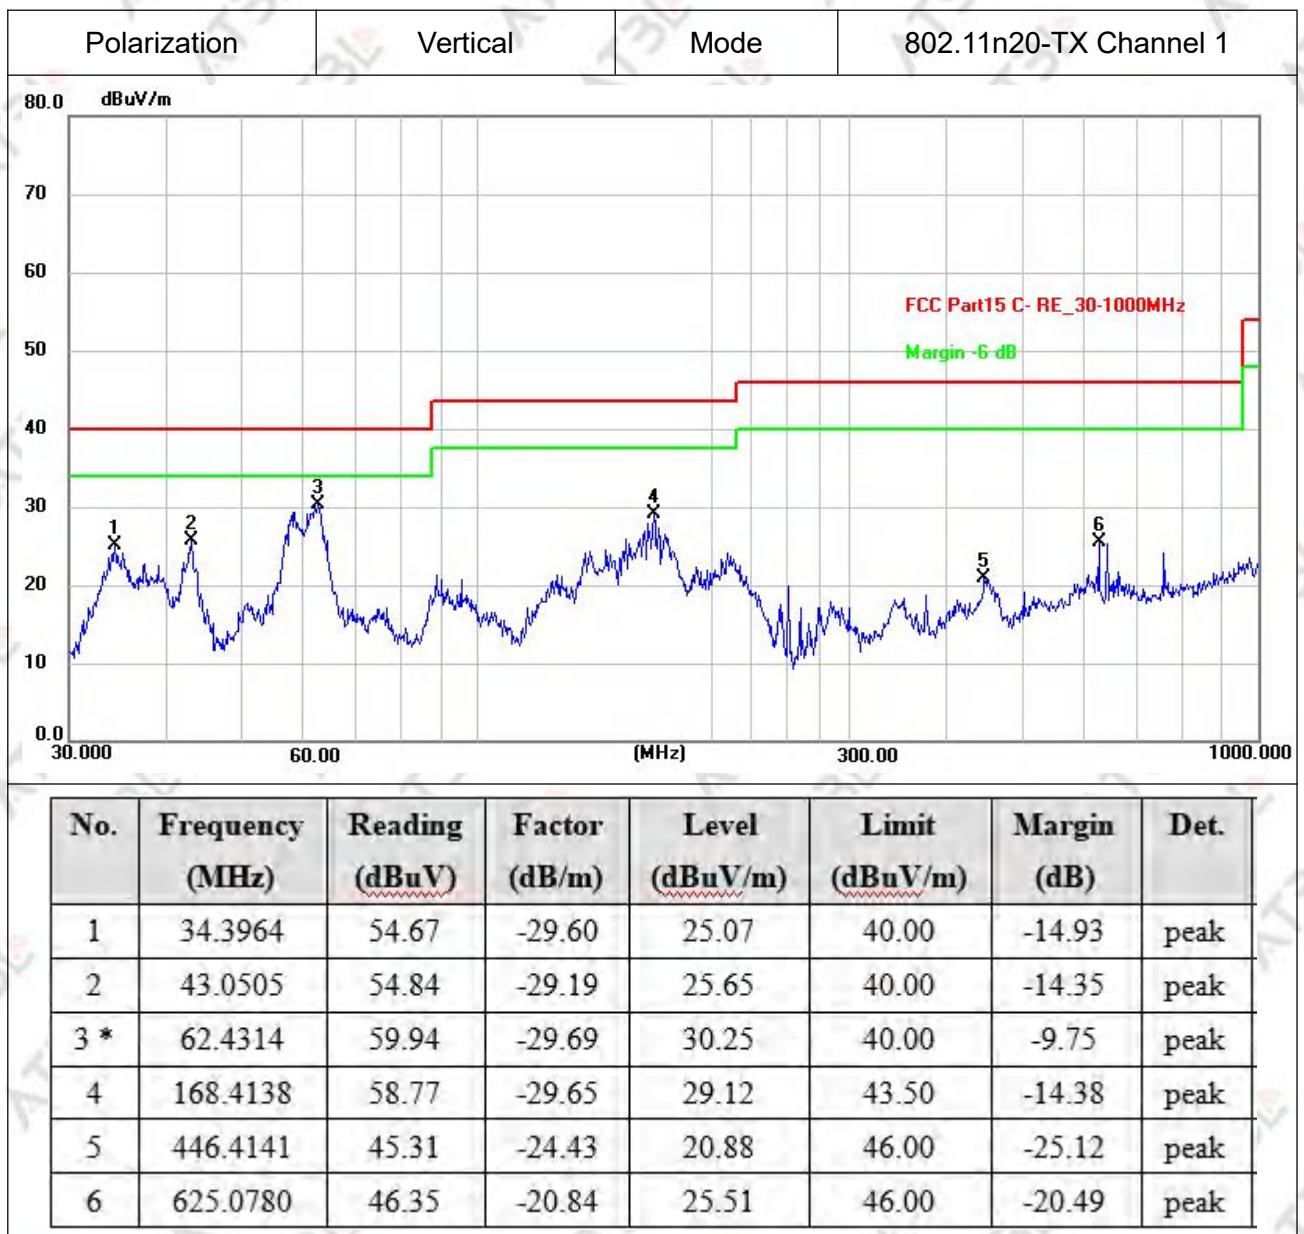

Above 1GHz:

Note:

1. All modes have been tested, only worst (802.11n20 and 802.11n40)mode was recorded in the test report.
2. In frequency ranges 18 ~25GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.
3. We used the filter to test and the main frequency was filtered out.
4. Emission Level (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).
5. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)-Amplifier Gain.
6. Margin value = Emission level-Limit value.

Test Mode: 802.11n20							
Test Channel:Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4824.000	59.84	-1.21	58.63	74	-15.37	peak	Pass
4824.000	49.77	-1.21	48.56	54	-5.44	AV	Pass
7326.000	50.20	4.89	55.09	74	-18.91	peak	Pass
7326.000	34.24	4.89	39.13	54	-14.87	AV	Pass
Test Channel:Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4824.000	60.26	-1.21	59.05	74	-14.95	peak	Pass
4824.000	50.21	-1.21	49	54	-5	AV	Pass
7326.000	50.64	4.89	55.53	74	-18.47	peak	Pass
7326.000	34.98	4.89	39.87	54	-14.13	AV	Pass
Test Channel:Middle channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4874.000	59.32	-2.06	57.26	74	-16.74	peak	Pass
4874.000	49.14	-2.06	47.08	54	-6.92	AV	Pass
7311.000	50.20	5.49	55.69	74	-18.31	peak	Pass
7311.000	33.75	5.49	39.24	54	-14.76	AV	Pass
Test Channel: Middle channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4874.000	59.88	-2.06	57.82	74	-16.18	peak	Pass
4874.000	49.41	-2.06	47.35	54	-6.65	AV	Pass

7311.000	50.34	5.49	55.83	74	-18.17	peak	Pass
7311.000	34.71	5.49	40.20	54	-13.80	AV	Pass
Test Channel:Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4924.000	59.33	-1.38	57.95	74	-16.05	peak	Pass
4924.000	49.43	-1.38	48.05	54	-5.95	AV	Pass
7386.000	49.41	5.37	54.78	74	-19.22	peak	Pass
7386.000	34.40	5.37	39.77	54	-14.23	AV	Pass
Test Channel:Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4924.000	60.13	-1.38	58.75	74	-15.25	peak	Pass
4924.000	49.97	-1.38	48.59	54	-5.41	AV	Pass
7386.000	49.95	5.37	55.32	74	-18.68	peak	Pass
7386.000	34.74	5.37	40.11	54	-13.89	AV	Pass

Test Mode: 802.11n40
Test Channel:Lowest channel, Test Polarization: Vertical

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4844.000	60.42	-1.21	59.21	74	-14.79	peak	Pass
4844.000	50.17	-1.21	48.96	54	-5.04	AV	Pass
7266.000	51.59	4.89	56.48	74	-17.52	peak	Pass
7266.000	36.11	4.89	41.00	54	-13.00	AV	Pass

Test Channel:Lowest channel, Test Polarization: Horizontal

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4844.000	61.32	-1.21	60.11	74	-13.89	peak	Pass
4844.000	50.87	-1.21	49.66	54	-4.34	AV	Pass
7266.000	51.65	4.89	56.54	74	-17.46	peak	Pass
7266.000	36.87	4.89	41.76	54	-12.24	AV	Pass

Test Channel:Middle channel, Test Polarization: Vertical

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4874.000	60.65	-2.06	58.59	74	-15.41	peak	Pass
4874.000	49.65	-2.06	47.59	54	-6.41	AV	Pass
7311.000	51.62	5.49	57.11	74	-16.89	peak	Pass
7311.000	36.38	5.49	41.87	54	-12.13	AV	Pass

Test Channel: Middle channel, Test Polarization: Horizontal

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4874.000	60.65	-2.06	58.59	74	-15.41	peak	Pass
4874.000	50.35	-2.06	48.29	54	-5.71	AV	Pass
7311.000	51.63	5.49	57.12	74	-16.88	peak	Pass
7311.000	36.81	5.49	42.30	54	-11.70	AV	Pass

Test Channel:Highest channel, Test Polarization: Vertical

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4904.000	59.64	-1.38	58.26	74	-15.74	peak	Pass
4904.000	50.46	-1.38	49.08	54	-4.92	AV	Pass
7356.000	51.34	5.37	56.71	74	-17.29	peak	Pass
7356.000	35.55	5.37	40.92	54	-13.08	AV	Pass

Test Channel:Highest channel, Test Polarization: Horizontal

Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4904.000	60.32	-1.38	58.94	74	-15.06	peak	Pass
4904.000	50.73	-1.38	49.35	54	-4.65	AV	Pass
7356.000	51.44	5.37	56.81	74	-17.19	peak	Pass
7356.000	36.52	5.37	41.89	54	-12.11	AV	Pass

Test Result of Restricted Band

Test Mode: 802.11n20							
Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2310.000	51.25	-10.95	40.30	74	-33.70	peak	Pass
2310.000	41.33	-10.95	30.38	54	-23.62	AV	Pass
2390.000	50.78	-10.86	39.92	74	-34.08	peak	Pass
2390.000	39.47	-10.86	28.61	54	-25.39	AV	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2310.000	52.14	-10.95	41.19	74	-32.81	peak	Pass
2310.000	41.65	-10.95	30.7	54	-23.3	AV	Pass
2390.000	50.98	-10.86	40.12	74	-33.88	peak	Pass
2390.000	39.56	-10.86	28.7	54	-25.3	AV	Pass
Test Channel: Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2483.500	51.11	-10.34	40.77	74	-33.23	peak	Pass
2483.500	40.84	-10.34	30.50	54	-23.50	AV	Pass
2500.000	50.40	-10.24	40.16	74	-33.84	peak	Pass
2500.000	38.88	-10.24	28.64	54	-25.36	AV	Pass
Test Channel: Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2483.500	51.39	-10.34	41.05	74	-32.95	peak	Pass
2483.500	40.87	-10.34	30.53	54	-23.47	AV	Pass
2500.000	50.77	-10.24	40.53	74	-33.47	peak	Pass
2500.000	39.16	-10.24	28.92	54	-25.08	AV	Pass

Note:Margin=Level-Limit=Reading+factor-Limit


Test Mode: 802.11n40							
Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2310.000	51.63	-10.95	40.68	74	-33.32	peak	Pass
2310.000	39.37	-10.95	28.42	54	-25.58	AV	Pass
2390.000	49.09	-10.86	38.23	74	-35.77	peak	Pass
2390.000	37.85	-10.86	26.99	54	-27.01	AV	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2310.000	51.65	-10.95	40.7	74	-33.3	peak	Pass
2310.000	40.11	-10.95	29.16	54	-24.84	AV	Pass
2390.000	49.68	-10.86	38.82	74	-35.18	peak	Pass
2390.000	38.56	-10.86	27.7	54	-26.3	AV	Pass
Test Channel: Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2483.500	51.33	-10.34	40.99	74	-33.01	peak	Pass
2483.500	39.41	-10.34	29.07	54	-24.93	AV	Pass
2500.000	48.59	-10.24	38.35	74	-35.65	peak	Pass
2500.000	36.96	-10.24	26.72	54	-27.28	AV	Pass
Test Channel: Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2483.500	51.38	-10.34	41.04	74	-32.96	peak	Pass
2483.500	39.66	-10.34	29.32	54	-24.68	AV	Pass
2500.000	48.97	-10.24	38.73	74	-35.27	peak	Pass
2500.000	37.73	-10.24	27.49	54	-26.51	AV	Pass


Note:Margin=Level-Limit=Reading+factor-Limit

C7.AC Power-Line Conducted Emission

Note:

- 1.All modes have been tested, only worst mode(802.11n20-TX Channel 1) was recorded in the test report.
- 2.Emission Level = Reading Value + Correction Factor .
3. Correction Factor = Insertion loss + Cable loss.
4. The emission levels of other frequencies were less than 20dB margin against the limit.
5. Margin value = Emission level-Limit value.

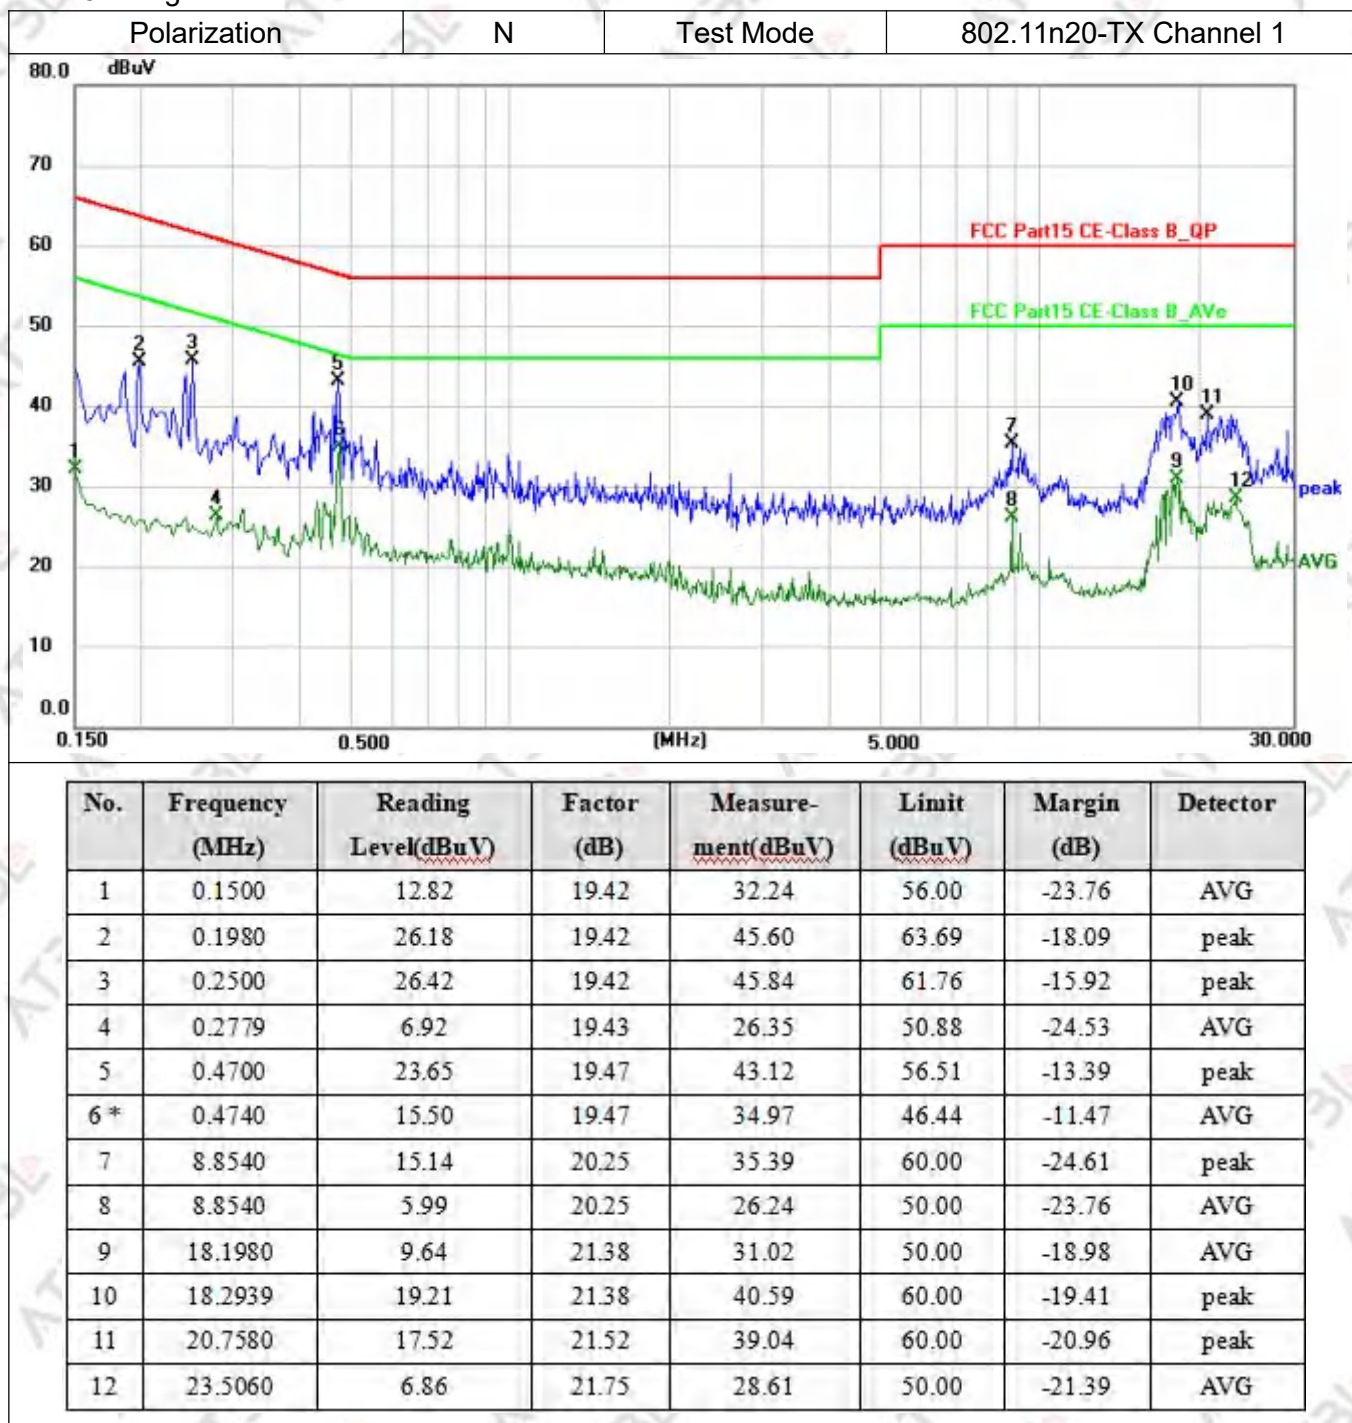

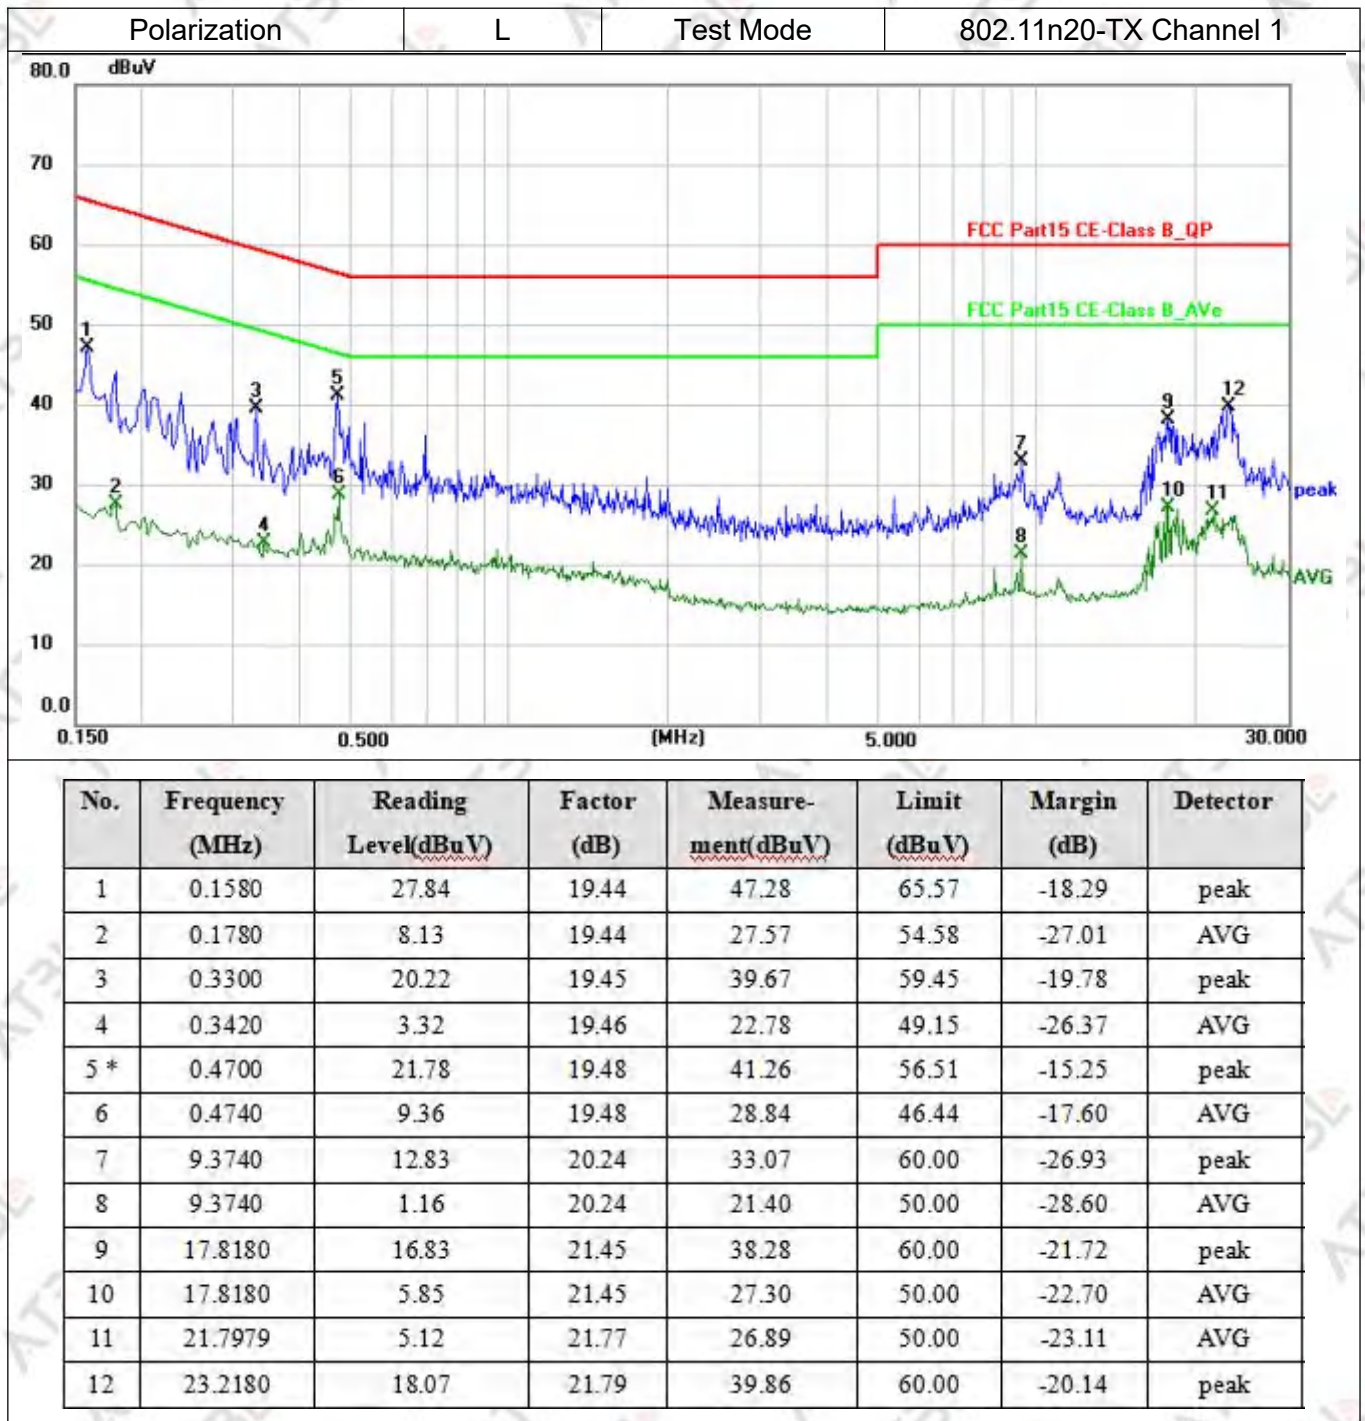

*****END*****