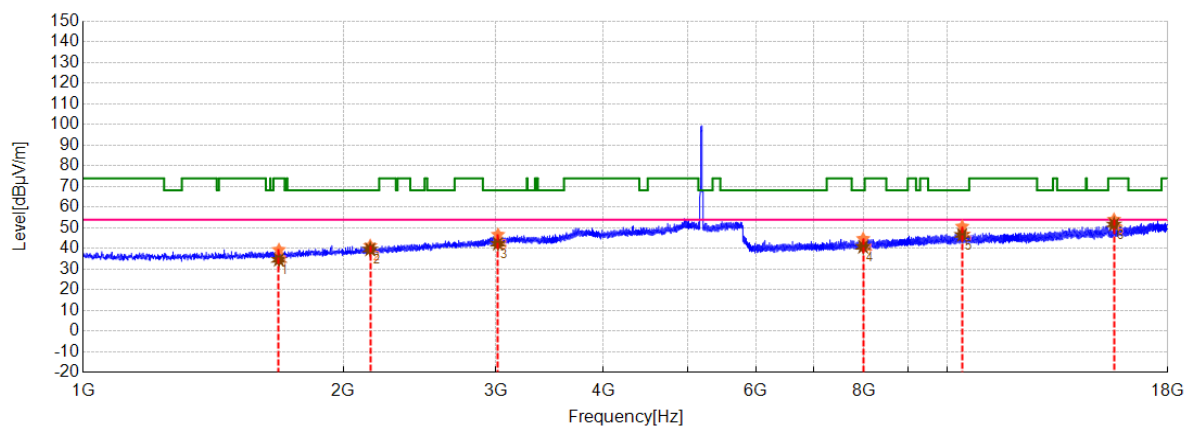


Mode: AC20

Channel: 5200 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

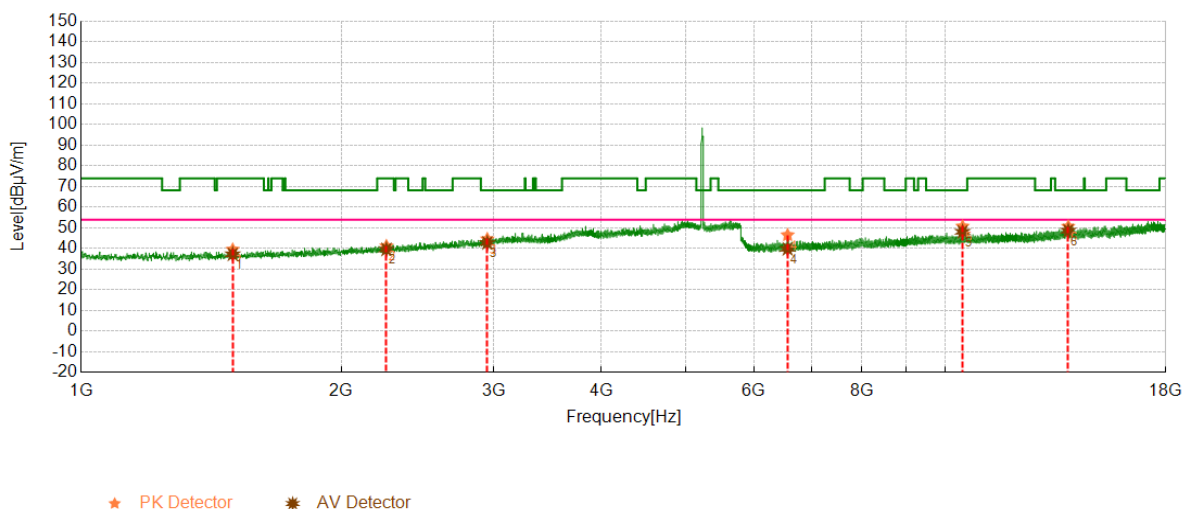
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1684.0000	0.51	38.94	39.45	74.00	34.55	34.10	34.61	54.00	19.39	150	214	Horizontal	PASS
2	2147.8000	2.37	39.06	41.43	68.23	26.80	37.23	39.60	54.00	14.40	150	189	Horizontal	PASS
3	3019.6000	6.09	40.69	46.78	68.23	21.45	36.28	42.37	54.00	11.63	150	322	Horizontal	PASS
4	7990.5100	-7.44	52.22	44.78	68.23	23.45	48.31	40.87	54.00	13.13	150	239	Horizontal	PASS
5	10403.060	-3.87	54.59	50.72	68.23	17.51	50.48	46.61	54.00	7.39	150	351	Horizontal	PASS
6	15592.330	3.02	51.03	54.05	74.00	19.95	48.68	51.70	54.00	2.30	150	360	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AC20

Channel: 5240 MHz

Test Graph

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1496.8000	-0.07	39.64	39.57	74.00	34.43	37.34	37.27	54.00	16.73	150	0	Vertical	PASS
2	2254.6000	2.72	38.52	41.24	74.00	32.76	36.90	39.62	54.00	14.38	150	326	Vertical	PASS
3	2950.0000	5.77	38.83	44.60	68.23	23.63	36.99	42.76	54.00	11.24	150	193	Vertical	PASS
4	6567.9900	-10.04	56.63	46.59	68.23	21.64	49.93	39.89	54.00	14.11	150	151	Vertical	PASS
5	10470.160	-3.73	54.51	50.78	68.23	17.45	51.89	48.16	54.00	5.84	150	18	Vertical	PASS
6	13877.620	1.48	49.22	50.70	68.23	17.53	47.20	48.68	54.00	5.32	150	30	Vertical	PASS

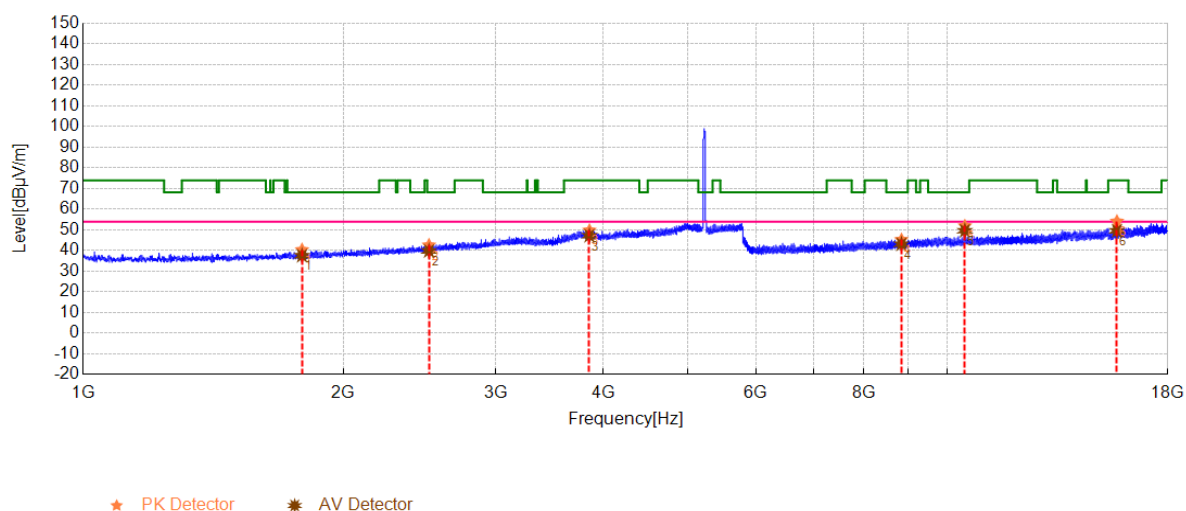
Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AC20

Channel: 5240 MHz

Test Graph



Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1790.8000	0.99	39.39	40.38	68.23	27.85	36.55	37.54	54.00	16.46	150	211	Horizontal	PASS
2	2512.0000	3.76	38.87	42.63	68.23	25.60	36.10	39.86	54.00	14.14	150	277	Horizontal	PASS
3	3852.4000	9.01	40.82	49.83	74.00	24.17	38.22	47.23	54.00	6.77	150	59	Horizontal	PASS
4	8848.7800	-6.77	52.05	45.28	68.23	22.95	49.87	43.10	54.00	10.90	150	25	Horizontal	PASS
5	10478.700	-3.72	55.65	51.93	68.23	16.30	53.35	49.63	54.00	4.37	150	10	Horizontal	PASS
6	15716.770	2.24	51.91	54.15	74.00	19.85	47.38	49.62	54.00	4.38	150	25	Horizontal	PASS

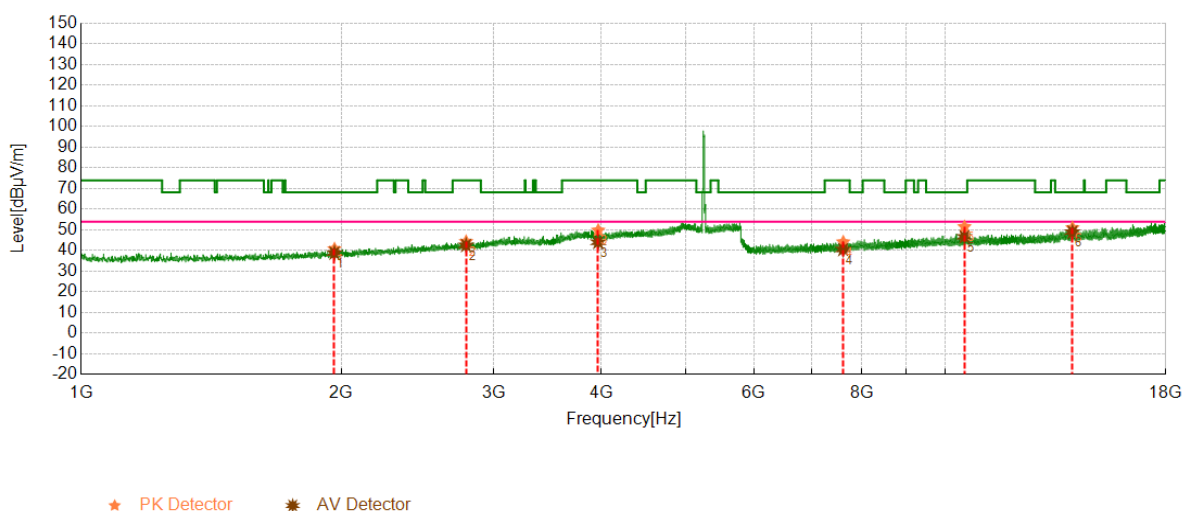
Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC20

Channel: 5260 MHz

Test Graph



Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1963.0000	1.75	39.1	40.85	68.23	27.38	37.10	38.85	54.00	15.15	150	157	Vertical	PASS
2	2788.0000	4.93	39.42	44.35	74.00	29.65	37.59	42.52	54.00	11.48	150	343	Vertical	PASS
3	3964.6000	9.20	40.63	49.83	74.00	24.17	34.85	44.05	54.00	9.95	150	207	Vertical	PASS
4	7617.1900	-8.94	53.09	44.15	74.00	29.85	49.51	40.57	54.00	13.43	150	171	Vertical	PASS
5	10522.620	-3.55	55.11	51.56	68.23	16.67	50.26	46.71	54.00	7.29	150	10	Vertical	PASS
6	14031.950	1.85	49.18	51.03	68.23	17.20	47.13	48.98	54.00	5.02	150	160	Vertical	PASS

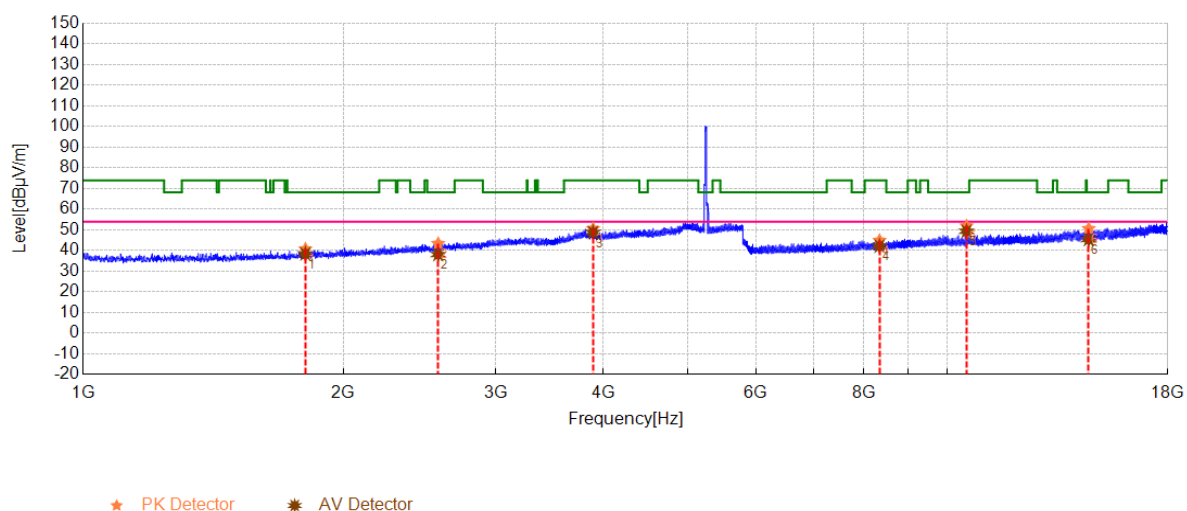
Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AC20

Channel: 5260 MHz

Test Graph



Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1807.0000	1.01	39.77	40.78	68.23	27.45	37.40	38.41	54.00	15.59	150	250	Horizontal	PASS
2	2574.4000	4.06	39.37	43.43	68.23	24.80	34.06	38.12	54.00	15.88	150	258	Horizontal	PASS
3	3889.6000	9.24	41.39	50.63	74.00	23.37	39.55	48.79	54.00	5.21	150	238	Horizontal	PASS
4	8346.1400	-7.58	52.51	44.93	74.00	29.07	49.76	42.18	54.00	11.82	150	181	Horizontal	PASS
5	10525.060	-3.57	55.5	51.93	68.23	16.30	52.96	49.39	54.00	4.61	150	10	Horizontal	PASS
6	14574.850	2.25	48.4	50.65	68.23	17.58	43.14	45.39	54.00	8.61	150	44	Horizontal	PASS

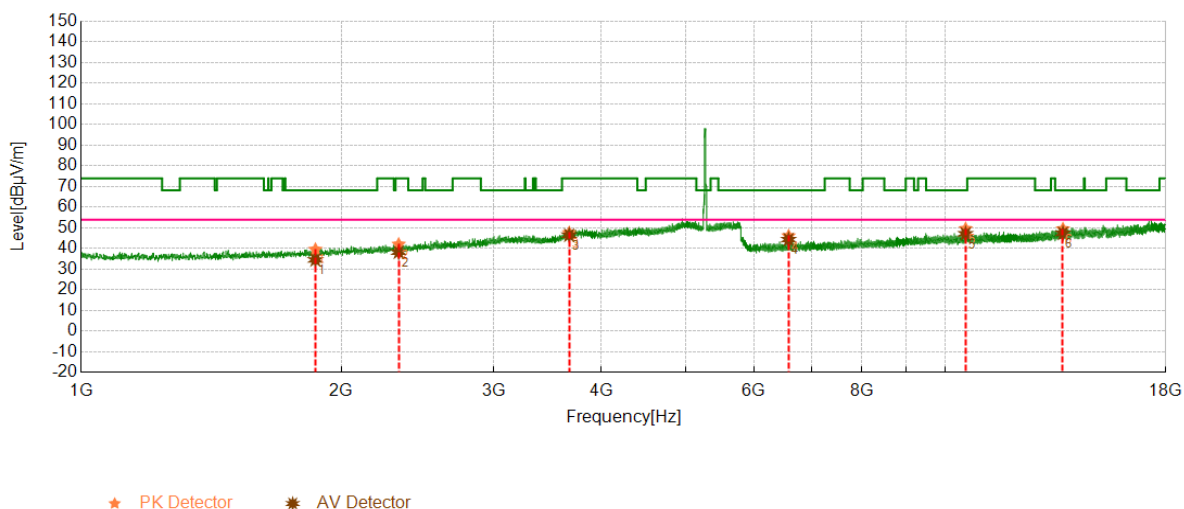
Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AC20

Channel: 5280 MHz

Test Graph



Final Data List

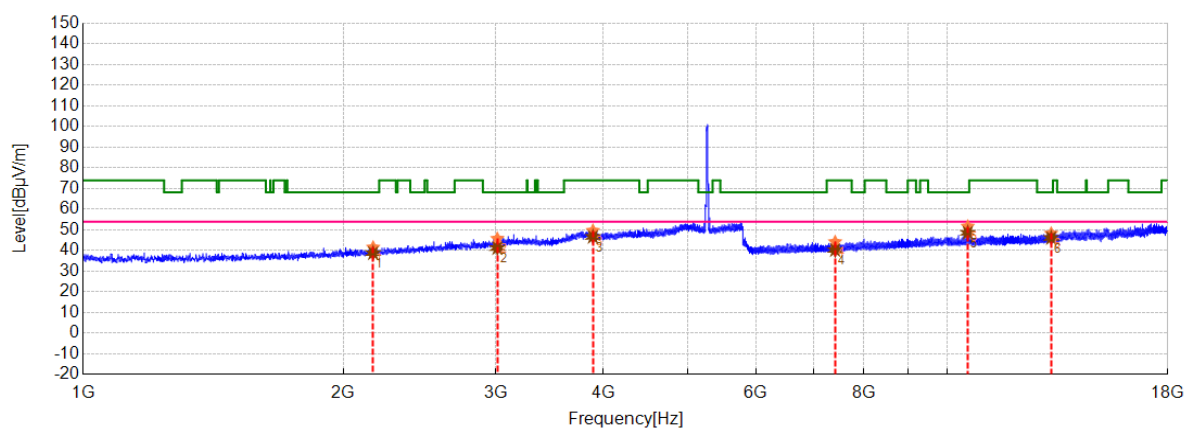
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1865.8000	1.34	38.25	39.59	68.23	28.64	33.20	34.54	54.00	19.46	150	234	Vertical	PASS
2	2329.6000	2.82	39.27	42.09	74.00	31.91	35.46	38.28	54.00	15.72	150	205	Vertical	PASS
3	3669.4000	8.03	39.65	47.68	74.00	26.32	38.45	46.48	54.00	7.52	150	335	Vertical	PASS
4	6585.0700	-10.14	56.27	46.13	68.23	22.10	54.51	44.37	54.00	9.63	150	147	Vertical	PASS
5	10554.950	-3.34	52.96	49.62	68.23	18.61	50.53	47.19	54.00	6.81	150	349	Vertical	PASS
6	13681.200	0.41	49.1	49.51	68.23	18.72	47.01	47.42	54.00	6.58	150	279	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC20

Channel: 5280 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

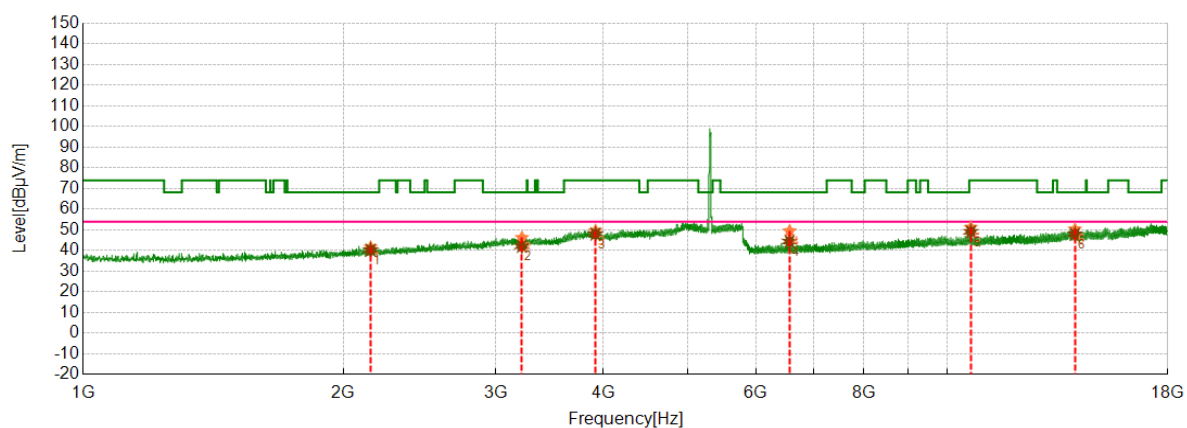
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2164.6000	2.24	39.33	41.57	68.23	26.66	36.54	38.78	54.00	15.22	150	137	Horizontal	PASS
2	3014.2000	6.04	39.77	45.81	68.23	22.42	35.22	41.26	54.00	12.74	150	208	Horizontal	PASS
3	3888.4000	9.21	40.49	49.70	74.00	24.30	37.45	46.66	54.00	7.34	150	166	Horizontal	PASS
4	7415.2800	-8.81	53.03	44.22	74.00	29.78	49.11	40.30	54.00	13.70	150	75	Horizontal	PASS
5	10560.440	-3.21	54.95	51.74	68.23	16.49	51.84	48.63	54.00	5.37	150	308	Horizontal	PASS
6	13188.930	-0.08	48.39	48.31	68.23	19.92	46.21	46.13	54.00	7.87	150	38	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AC20

Channel: 5320 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2150.2000	2.44	39.24	41.68	68.23	26.55	37.79	40.23	54.00	13.77	150	113	Vertical	PASS
2	3218.2000	6.44	39.82	46.26	68.23	21.97	35.70	42.14	54.00	11.86	150	17	Vertical	PASS
3	3915.4000	9.23	40.38	49.61	74.00	24.39	38.79	48.02	54.00	5.98	150	322	Vertical	PASS
4	6567.3800	-10.05	59.56	49.51	68.23	18.72	54.47	44.42	54.00	9.58	150	150	Vertical	PASS
5	10646.450	-3.32	54.49	51.17	74.00	22.83	52.46	49.14	54.00	4.86	150	68	Vertical	PASS
6	14050.860	1.77	48.58	50.35	68.23	17.88	46.21	47.98	54.00	6.02	150	103	Vertical	PASS

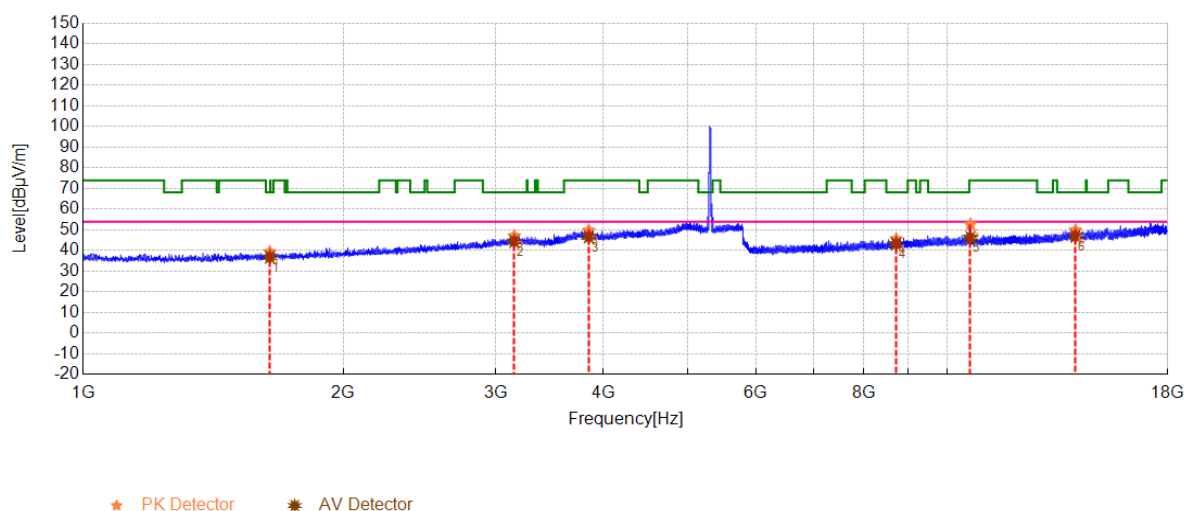
Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC20

Channel: 5320 MHz

Test Graph



Final Data List

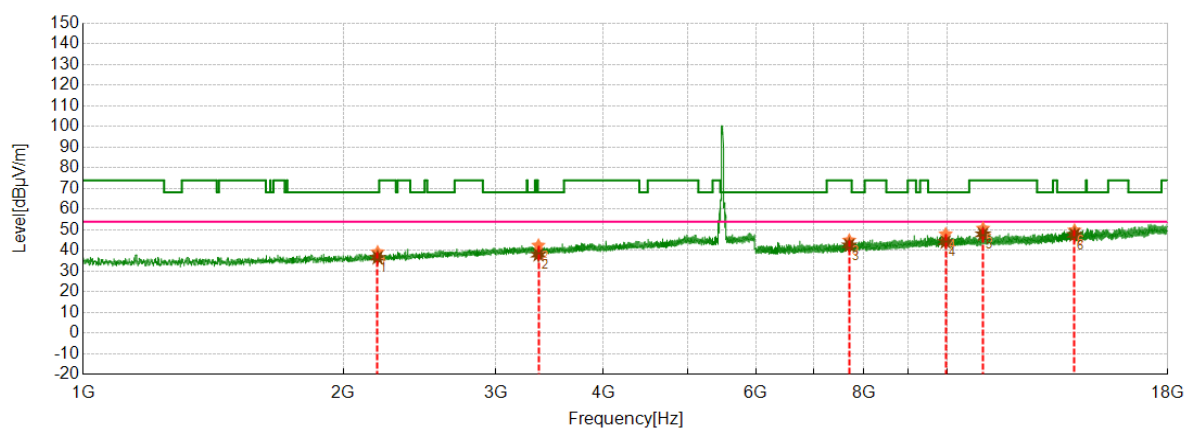
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBµV/m]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	AV Reading [dBµV/m]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1643.8000	0.34	39.07	39.41	68.23	28.82	36.48	36.82	54.00	17.18	150	306	Horizontal	PASS
2	3153.4000	6.42	40.7	47.12	68.23	21.11	38.00	44.42	54.00	9.58	150	22	Horizontal	PASS
3	3845.8000	9.11	40.71	49.82	74.00	24.18	37.55	46.66	54.00	7.34	150	55	Horizontal	PASS
4	8724.9500	-6.90	52.47	45.57	68.23	22.66	50.19	43.29	54.00	10.71	150	94	Horizontal	PASS
5	10636.690	-3.40	56.1	52.70	74.00	21.30	49.76	46.36	54.00	7.64	150	63	Horizontal	PASS
6	14072.210	1.57	48.35	49.92	68.23	18.31	45.41	46.98	54.00	7.02	150	360	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC20

Channel: 5500 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2190.6250	2.37	36.92	39.29	68.23	28.94	34.23	36.60	54.00	17.40	150	315	Vertical	PASS
2	3363.1250	6.78	35.72	42.50	68.23	25.73	31.25	38.03	54.00	15.97	150	297	Vertical	PASS
3	7699.8000	-8.46	53.43	44.97	74.00	29.03	51.06	42.60	54.00	11.40	150	318	Vertical	PASS
4	9955.8000	-3.69	51.66	47.97	68.23	20.26	47.88	44.19	54.00	9.81	150	47	Vertical	PASS
5	10997.400	-3.00	53.75	50.75	74.00	23.25	50.93	47.93	54.00	6.07	150	77	Vertical	PASS
6	14036.400	2.02	47.83	49.85	68.23	18.38	45.63	47.65	54.00	6.35	150	60	Vertical	PASS

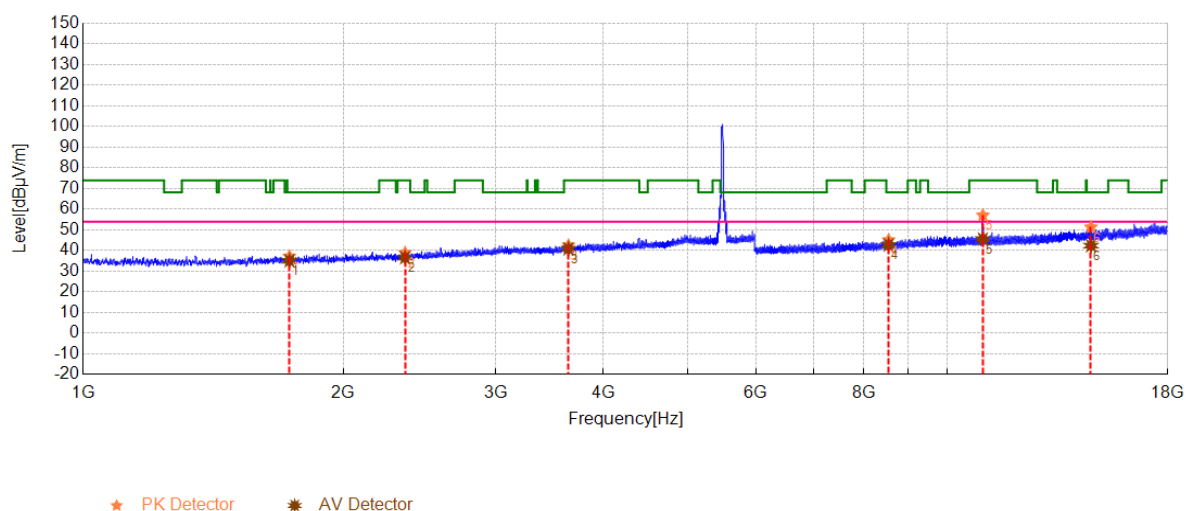
Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC20

Channel: 5500 MHz

Test Graph



Final Data List

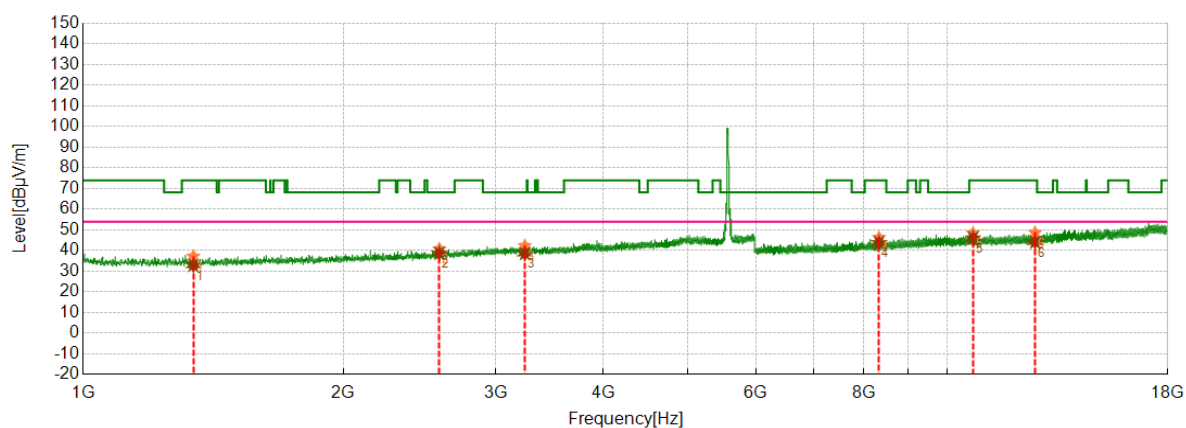
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1731.8750	0.68	36.57	37.25	68.23	30.98	34.45	35.13	54.00	18.87	150	247	Horizontal	PASS
2	2356.8750	2.96	36.01	38.97	74.00	35.03	33.64	36.60	54.00	17.40	150	38	Horizontal	PASS
3	3643.1250	7.93	34.65	42.58	74.00	31.42	32.96	40.89	54.00	13.11	150	214	Horizontal	PASS
4	8551.8000	-7.00	52.13	45.13	68.23	23.10	49.74	42.74	54.00	11.26	150	71	Horizontal	PASS
5	10991.960	-3.04	60.15	57.11	74.00	16.89	48.64	45.60	54.00	8.40	150	122	Horizontal	PASS
6	14665.800	1.77	49.59	51.36	68.23	16.87	40.63	42.40	54.00	11.60	150	246	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC20

Channel: 5580 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

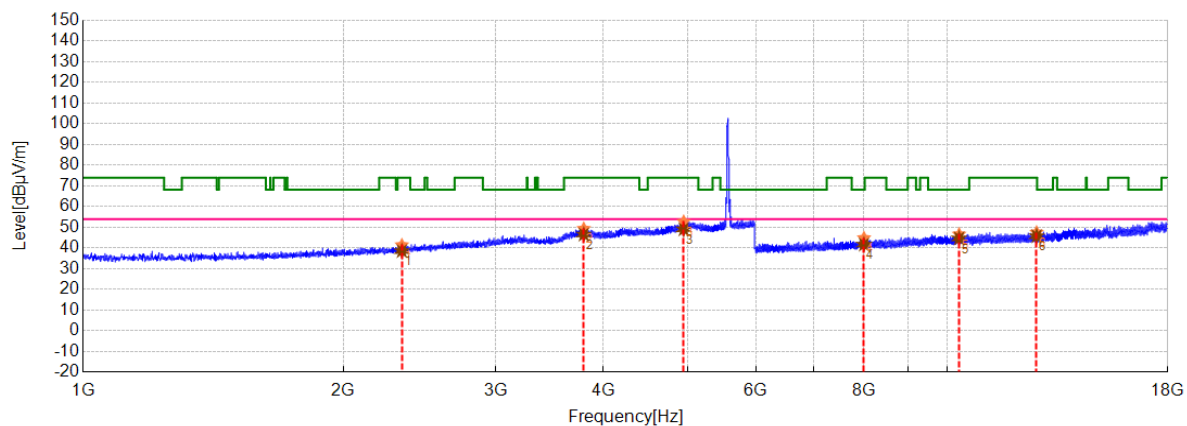
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1340.6250	-0.38	37.61	37.23	74.00	36.77	33.28	32.90	54.00	21.10	150	266	Vertical	PASS
2	2582.5000	4.04	36.78	40.82	68.23	27.41	34.61	38.65	54.00	15.35	150	136	Vertical	PASS
3	3243.1250	6.63	35.73	42.36	68.23	25.87	31.95	38.58	54.00	15.42	150	71	Vertical	PASS
4	8335.8000	-7.64	53.95	46.31	74.00	27.69	51.42	43.78	54.00	10.22	150	230	Vertical	PASS
5	10708.800	-3.46	51.91	48.45	74.00	25.55	49.50	46.04	54.00	7.96	150	287	Vertical	PASS
6	12633.600	-1.13	49.85	48.72	74.00	25.28	45.23	44.10	54.00	9.90	150	254	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AC20

Channel: 5580 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2336.8750	2.81	38.7	41.51	74.00	32.49	35.77	38.58	54.00	15.42	150	170	Horizonta	PASS
2	3795.0000	8.42	40.98	49.40	74.00	24.60	38.14	46.56	54.00	7.44	150	124	Horizonta	PASS
3	4952.5000	13.36	39.42	52.78	74.00	21.22	35.73	49.09	54.00	4.91	150	358	Horizonta	PASS
4	8007.6000	-7.63	52.53	44.90	68.23	23.33	49.35	41.72	54.00	12.28	150	208	Horizonta	PASS
5	10318.800	-3.20	49.89	46.69	68.23	21.54	47.89	44.69	54.00	9.31	150	214	Horizonta	PASS
6	12687.600	-0.62	48.23	47.61	74.00	26.39	46.38	45.76	54.00	8.24	150	122	Horizonta	PASS

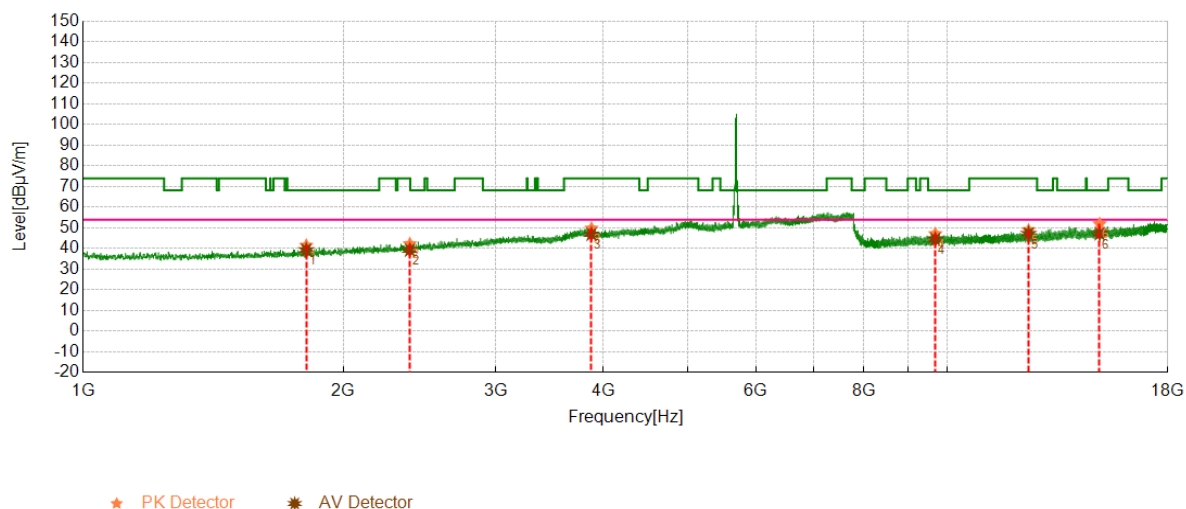
Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AC20

Channel: 5700 MHz

Test Graph



Final Data List

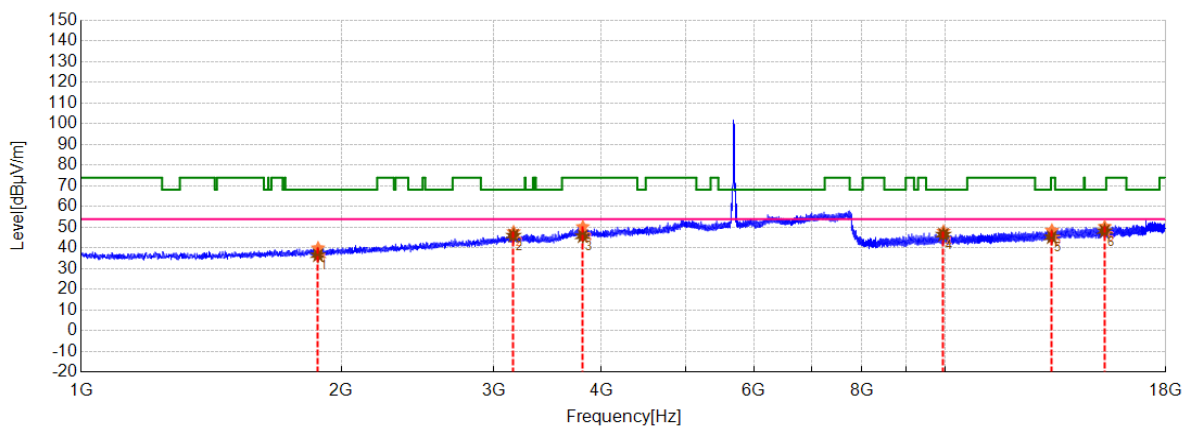
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1811.2400	1.02	40.48	41.50	68.23	26.73	38.30	39.32	54.00	14.68	150	360	Vertical	PASS
2	2387.2000	2.95	39.33	42.28	74.00	31.72	36.37	39.32	54.00	14.68	150	187	Vertical	PASS
3	3873.6800	8.97	40.85	49.82	74.00	24.18	37.99	46.96	54.00	7.04	150	183	Vertical	PASS
4	9683.9400	-4.64	51.78	47.14	68.23	21.09	49.10	44.46	54.00	9.54	150	160	Vertical	PASS
5	12417.540	-1.16	50.1	48.94	74.00	25.06	48.40	47.24	54.00	6.76	150	319	Vertical	PASS
6	15006.810	2.21	49.75	51.96	68.23	16.27	45.01	47.22	54.00	6.78	150	59	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC20

Channel: 5700 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1879.2400	1.44	38.57	40.01	68.23	28.22	35.13	36.57	54.00	17.43	150	140	Horizonta	PASS
2	3164.4400	6.37	41.43	47.80	68.23	20.43	39.68	46.05	54.00	7.95	150	9	Horizonta	PASS
3	3805.6800	8.78	41.48	50.26	74.00	23.74	36.97	45.75	54.00	8.25	150	240	Horizonta	PASS
4	9950.1600	-4.36	52.46	48.10	68.23	20.13	50.85	46.49	54.00	7.51	150	93	Horizonta	PASS
5	13284.030	0.66	47.87	48.53	74.00	25.47	44.62	45.28	54.00	8.72	150	286	Horizonta	PASS
6	15291.390	2.63	47.71	50.34	68.23	17.89	45.59	48.22	54.00	5.78	150	240	Horizonta	PASS

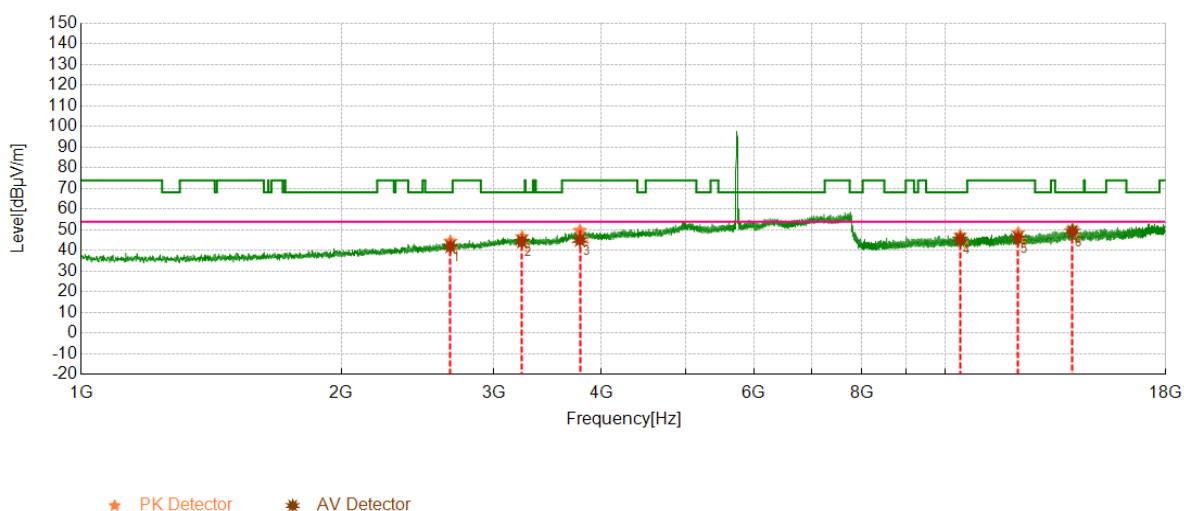
Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AC20

Channel: 5745 MHz

Test Graph



Final Data List

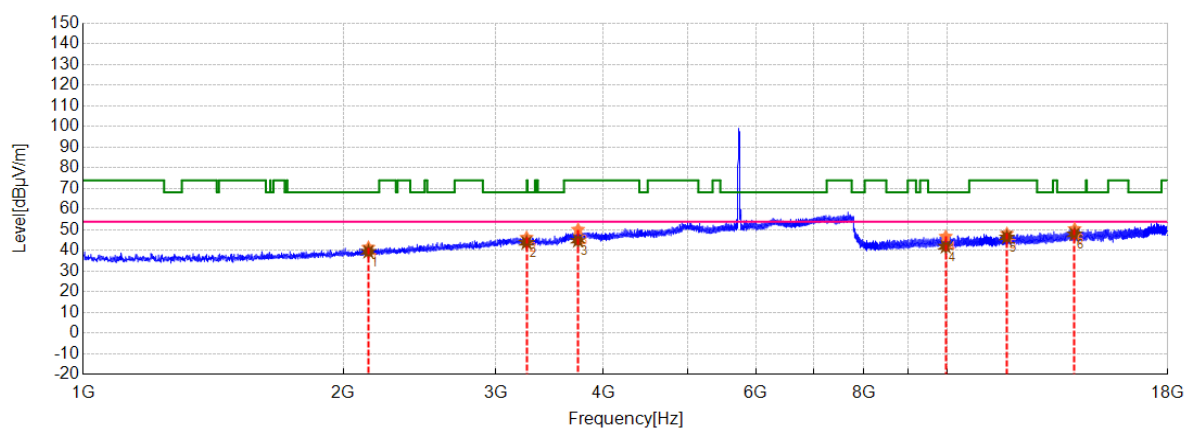
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2674.1600	4.33	40.15	44.48	68.23	23.75	37.65	41.98	54.00	12.02	150	347	Vertical	PASS
2	3236.5200	6.61	40.07	46.68	68.23	21.55	37.70	44.31	54.00	9.69	150	68	Vertical	PASS
3	3775.7600	8.74	40.99	49.73	74.00	24.27	36.37	45.11	54.00	8.89	150	18	Vertical	PASS
4	10404.060	-3.61	50.96	47.35	68.23	20.88	49.14	45.53	54.00	8.47	150	186	Vertical	PASS
5	12141.630	-1.12	49.66	48.54	74.00	25.46	47.16	46.04	54.00	7.96	150	38	Vertical	PASS
6	14031.690	1.83	48.63	50.46	68.23	17.77	47.46	49.29	54.00	4.71	150	104	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC20

Channel: 5745 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2137.6400	2.14	39.35	41.49	68.23	26.74	37.35	39.49	54.00	14.51	150	71	Horizontal	PASS
2	3258.2800	6.63	39.69	46.32	68.23	21.91	37.16	43.79	54.00	10.21	150	321	Horizontal	PASS
3	3737.6800	8.53	41.67	50.20	74.00	23.80	36.26	44.79	54.00	9.21	150	200	Horizontal	PASS
4	9956.7900	-4.33	51.16	46.83	68.23	21.40	46.24	41.91	54.00	12.09	150	48	Horizontal	PASS
5	11720.370	-1.83	50.06	48.23	74.00	25.77	48.26	46.43	54.00	7.57	150	335	Horizontal	PASS
6	14037.810	2.07	48.44	50.51	68.23	17.72	45.87	47.94	54.00	6.06	150	100	Horizontal	PASS

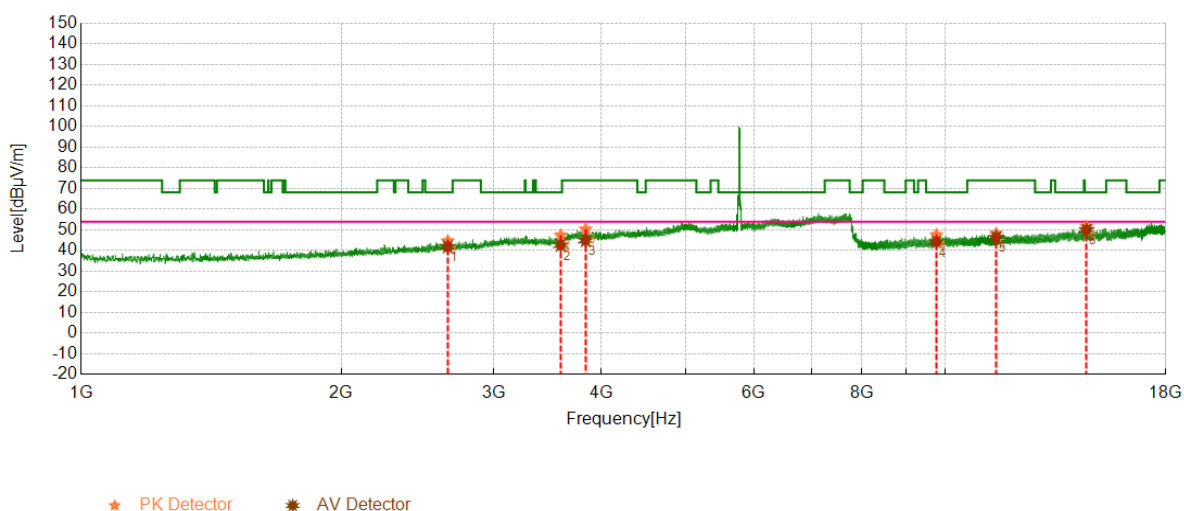
Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC20

Channel: 5785 MHz

Test Graph



Final Data List

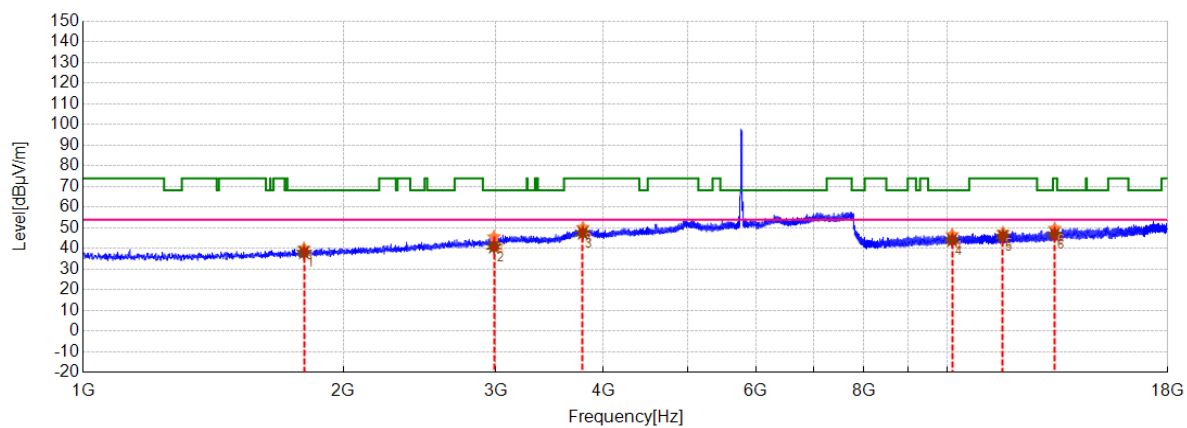
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBµV/m]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	AV Reading [dBµV/m]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2655.1200	4.36	40.34	44.70	68.23	23.53	37.42	41.78	54.00	12.22	150	42	Vertical	PASS
2	3588.0800	7.64	39.8	47.44	68.23	20.79	34.93	42.57	54.00	11.43	150	326	Vertical	PASS
3	3834.2400	8.92	41.43	50.35	74.00	23.65	35.95	44.87	54.00	9.13	150	253	Vertical	PASS
4	9765.0300	-4.48	52.11	47.63	68.23	20.60	48.62	44.14	54.00	9.86	150	228	Vertical	PASS
5	11452.110	-2.25	50.4	48.15	74.00	25.85	48.58	46.33	54.00	7.67	150	47	Vertical	PASS
6	14572.800	2.33	49.19	51.52	68.23	16.71	47.63	49.96	54.00	4.04	150	85	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC20

Channel: 5785 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

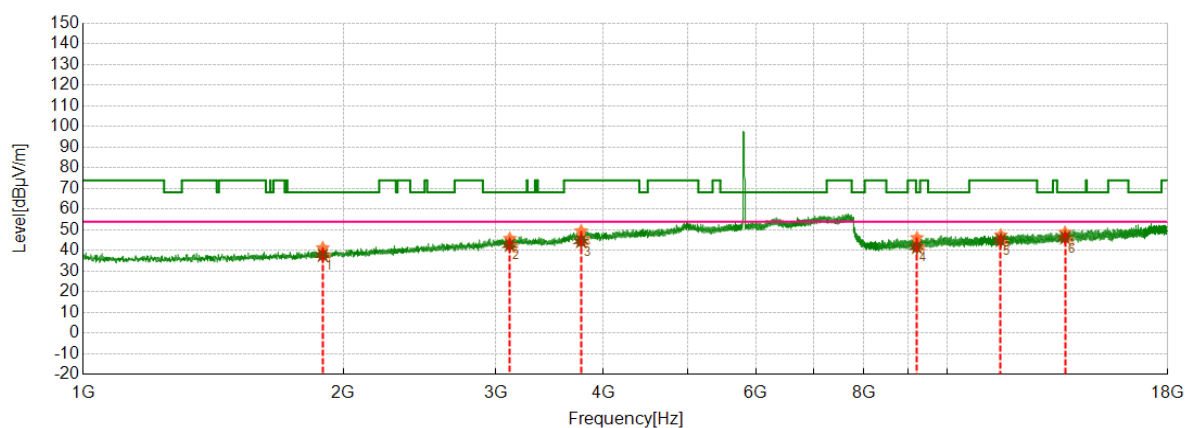
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1800.3600	1.03	39.06	40.09	68.23	28.14	37.10	38.13	54.00	15.87	150	281	Horizontal	PASS
2	2986.9600	6.02	39.66	45.68	68.23	22.55	34.85	40.87	54.00	13.13	150	32	Horizontal	PASS
3	3785.9600	8.52	41.64	50.16	74.00	23.84	39.03	47.55	54.00	6.45	150	27	Horizontal	PASS
4	10129.680	-4.04	50.74	46.70	68.23	21.53	48.13	44.09	54.00	9.91	150	293	Horizontal	PASS
5	11598.990	-2.13	49.85	47.72	74.00	26.28	48.09	45.96	54.00	8.04	150	94	Horizontal	PASS
6	13313.100	0.32	49.43	49.75	74.00	24.25	46.55	46.87	54.00	7.13	150	113	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC20

Channel: 5825 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

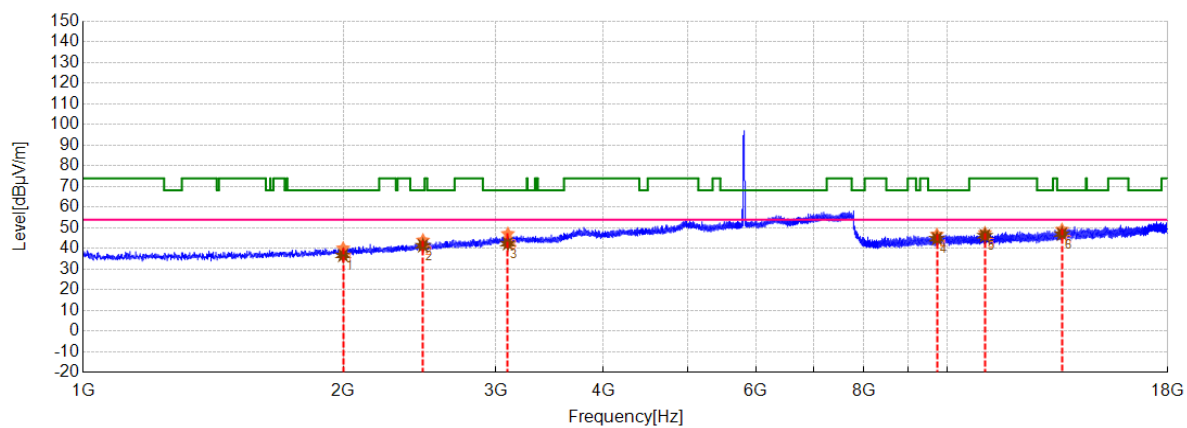
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBµV/m]	PK Value [dBµV/m]	PK Limit [dBµV/m]	PK Margin [dB]	AV Reading [dBµV/m]	AV Value [dBµV/m]	AV Limit [dBµV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1892.8400	1.45	39.83	41.28	68.23	26.95	36.33	37.78	54.00	16.22	150	47	Vertical	PASS
2	3116.1600	6.38	39.43	45.81	68.23	22.42	36.27	42.65	54.00	11.35	150	349	Vertical	PASS
3	3768.2800	8.64	40.84	49.48	74.00	24.52	35.87	44.51	54.00	9.49	150	156	Vertical	PASS
4	9221.8800	-4.52	50.7	46.18	68.23	22.05	46.17	41.65	54.00	12.35	150	74	Vertical	PASS
5	11534.220	-2.28	49.79	47.51	74.00	26.49	47.28	45.00	54.00	9.00	150	157	Vertical	PASS
6	13686.420	0.59	48.24	48.83	68.23	19.40	45.62	46.21	54.00	7.79	150	0	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC20

Channel: 5825 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

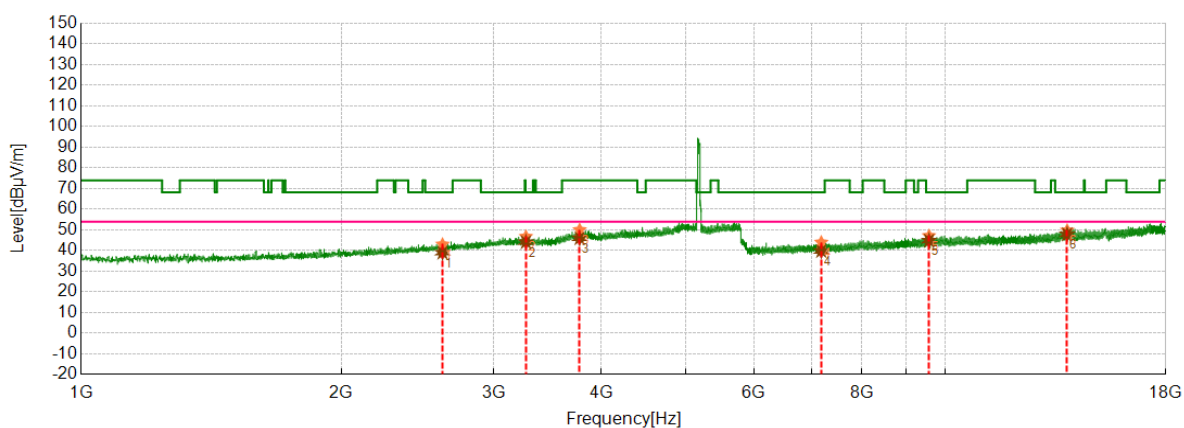
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1998.2400	1.65	38.54	40.19	68.23	28.04	35.07	36.72	54.00	17.28	150	69	Horizontal	PASS
2	2472.2000	3.44	40.59	44.03	68.23	24.20	37.97	41.41	54.00	12.59	150	73	Horizontal	PASS
3	3099.8400	6.51	40.68	47.19	68.23	21.04	35.90	42.41	54.00	11.59	150	347	Horizontal	PASS
4	9726.2700	-4.59	51.43	46.84	68.23	21.39	49.38	44.79	54.00	9.21	150	238	Horizontal	PASS
5	11054.820	-2.59	50.2	47.61	74.00	26.39	48.85	46.26	54.00	7.74	150	350	Horizontal	PASS
6	13572.690	0.79	48.41	49.20	68.23	19.03	46.27	47.06	54.00	6.94	150	318	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC40

Channel: 5190 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

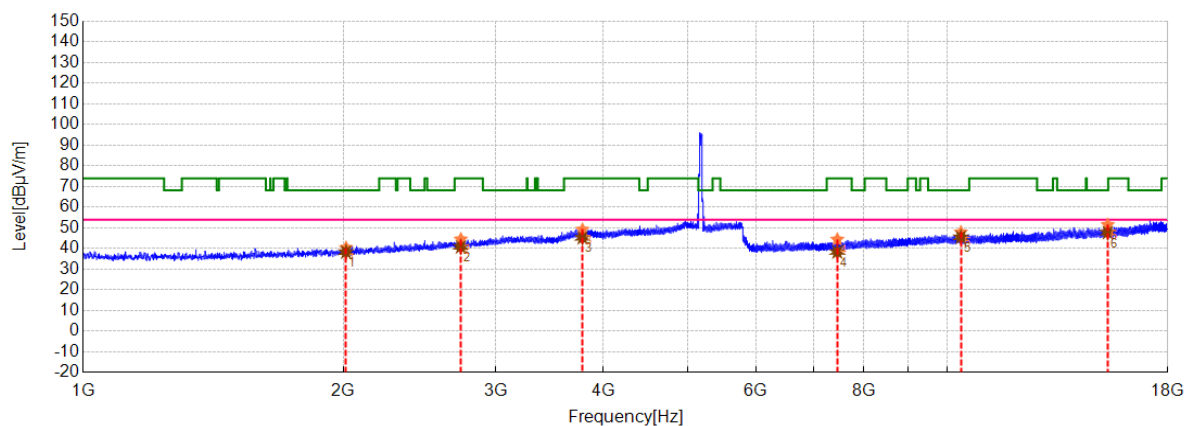
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2618.2000	4.17	38.88	43.05	68.23	25.18	34.84	39.01	54.00	14.99	150	17	Vertical	PASS
2	3269.8000	6.65	40.15	46.80	68.23	21.43	37.47	44.12	54.00	9.88	150	215	Vertical	PASS
3	3773.2000	8.73	41.34	50.07	74.00	23.93	37.25	45.98	54.00	8.02	150	333	Vertical	PASS
4	7184.7000	-9.59	53.61	44.02	68.23	24.21	49.41	39.82	54.00	14.18	150	292	Vertical	PASS
5	9575.2900	-4.27	51.46	47.19	68.23	21.04	49.14	44.87	54.00	9.13	150	58	Vertical	PASS
6	13836.140	1.51	48.33	49.84	68.23	18.39	46.38	47.89	54.00	6.11	150	14	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AC40

Channel: 5190 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

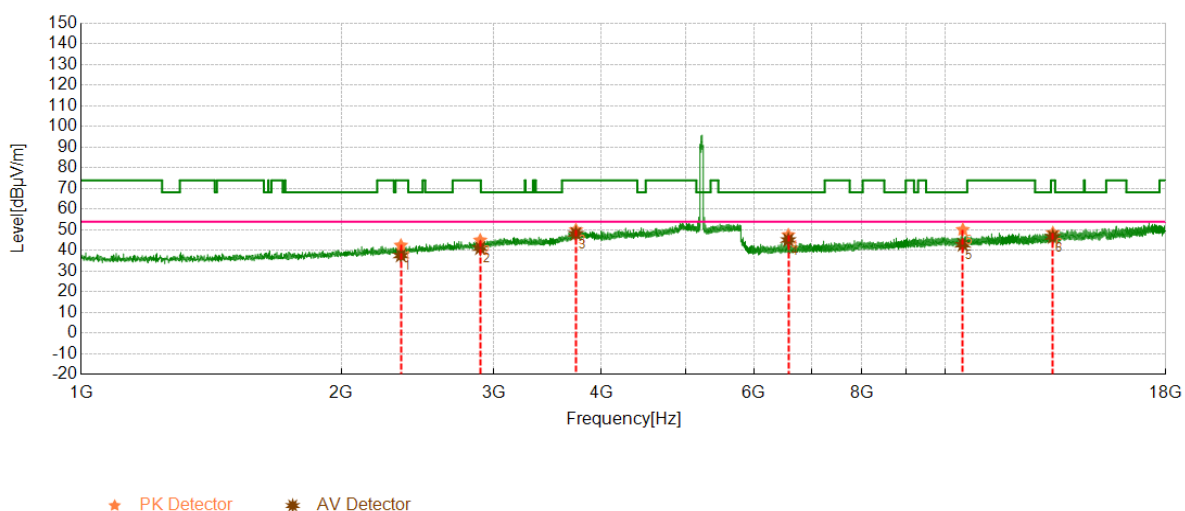
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2014.0000	1.83	38.62	40.45	68.23	27.78	36.48	38.31	54.00	15.69	150	207	Horizonta	PASS
2	2734.6000	4.71	39.83	44.54	74.00	29.46	36.13	40.84	54.00	13.16	150	180	Horizonta	PASS
3	3781.6000	8.68	40.59	49.27	74.00	24.73	36.56	45.24	54.00	8.76	150	111	Horizonta	PASS
4	7457.9800	-9.12	53.57	44.45	74.00	29.55	47.48	38.36	54.00	15.64	150	198	Horizonta	PASS
5	10367.070	-3.87	51.81	47.94	68.23	20.29	49.36	45.49	54.00	8.51	150	356	Horizonta	PASS
6	15334.300	3.37	48.21	51.58	68.23	16.65	44.40	47.77	54.00	6.23	150	120	Horizonta	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC40

Channel: 5230 MHz

Test Graph

Final Data List

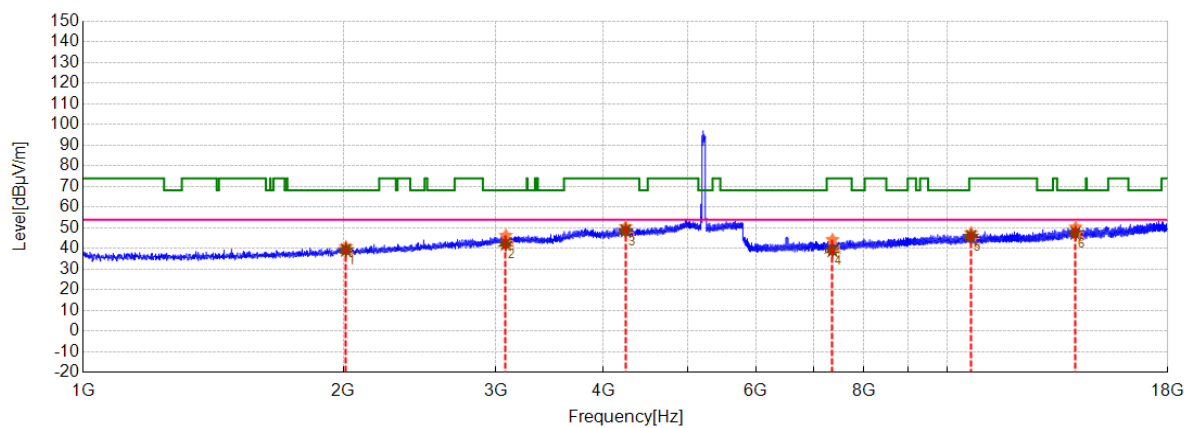
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2343.4000	2.93	39.6	42.53	74.00	31.47	34.71	37.64	54.00	16.36	150	151	Vertical	PASS
2	2894.8000	5.22	39.8	45.02	74.00	28.98	35.98	41.20	54.00	12.80	150	156	Vertical	PASS
3	3736.0000	8.45	41.54	49.99	74.00	24.01	39.72	48.17	54.00	5.83	150	358	Vertical	PASS
4	6580.8000	-10.17	57.73	47.56	68.23	20.67	55.32	45.15	54.00	8.85	150	138	Vertical	PASS
5	10476.870	-3.73	53.87	50.14	68.23	18.09	46.57	42.84	54.00	11.16	150	1	Vertical	PASS
6	13317.030	0.37	48.2	48.57	74.00	25.43	46.27	46.64	54.00	7.36	150	302	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC40

Channel: 5230 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

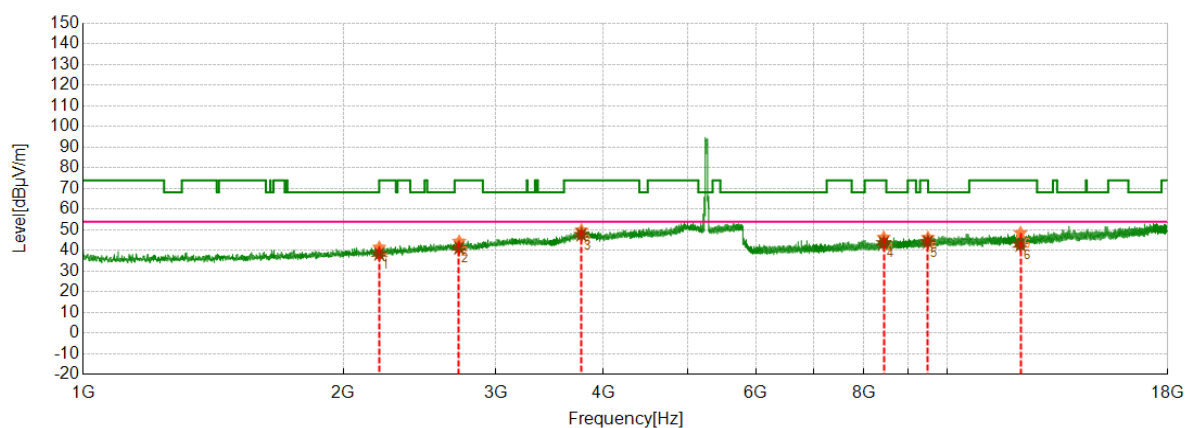
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2013.4000	1.84	39.01	40.85	68.23	27.38	37.50	39.34	54.00	14.66	150	65	Horizonta	PASS
2	3083.2000	6.20	40.14	46.34	68.23	21.89	36.05	42.25	54.00	11.75	150	30	Horizonta	PASS
3	4243.0000	10.24	40.27	50.51	74.00	23.49	38.39	48.63	54.00	5.37	150	260	Horizonta	PASS
4	7363.4300	-9.44	53.74	44.30	74.00	29.70	48.55	39.11	54.00	14.89	150	292	Horizonta	PASS
5	10653.160	-3.21	50.76	47.55	74.00	26.45	49.07	45.86	54.00	8.14	150	161	Horizonta	PASS
6	14077.090	1.61	48.74	50.35	68.23	17.88	45.88	47.49	54.00	6.51	150	175	Horizonta	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AC40

Channel: 5270 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

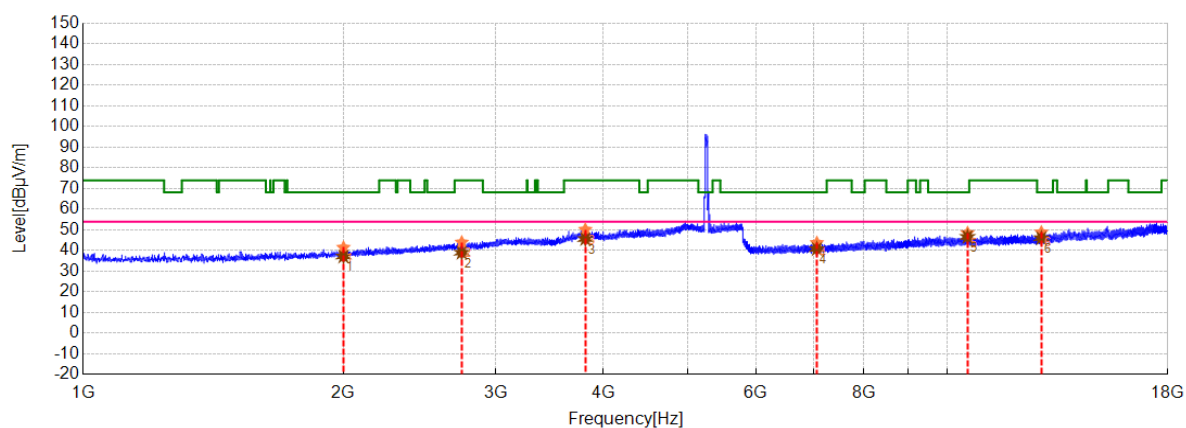
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2200.6000	2.41	39.16	41.57	74.00	32.43	35.95	38.36	54.00	15.64	150	79	Vertical	PASS
2	2722.6000	4.57	39.89	44.46	74.00	29.54	36.73	41.30	54.00	12.70	150	165	Vertical	PASS
3	3770.8000	8.73	41.15	49.88	74.00	24.12	38.96	47.69	54.00	6.31	150	208	Vertical	PASS
4	8440.6900	-6.98	53.36	46.38	74.00	27.62	50.73	43.75	54.00	10.25	150	0	Vertical	PASS
5	9496.6000	-4.78	51.05	46.27	74.00	27.73	48.96	44.18	54.00	9.82	150	73	Vertical	PASS
6	12153.150	-1.19	49.81	48.62	74.00	25.38	43.98	42.79	54.00	11.21	150	273	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC40

Channel: 5270 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

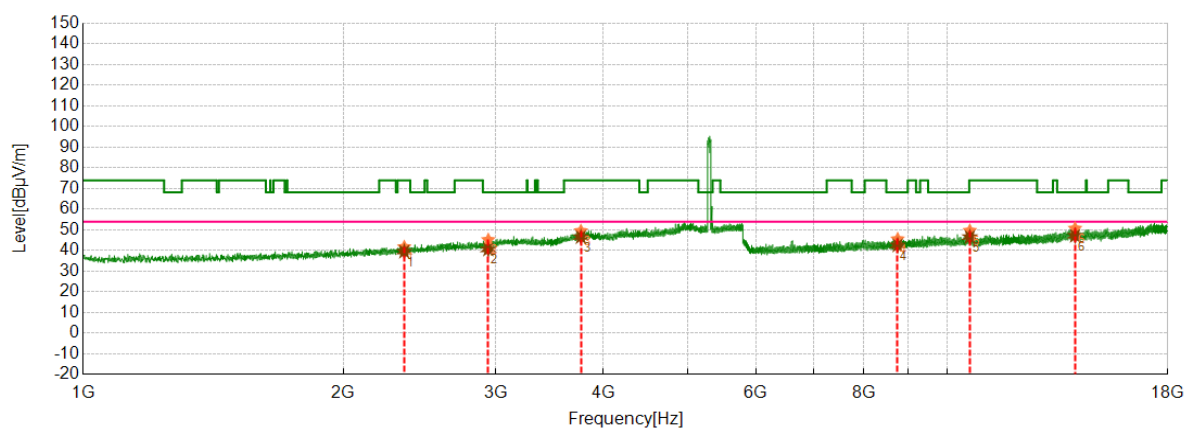
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2000.2000	1.60	39.91	41.51	68.23	26.72	35.58	37.18	54.00	16.82	150	288	Horizontal	PASS
2	2741.2000	4.76	39.24	44.00	74.00	30.00	34.24	39.00	54.00	15.00	150	134	Horizontal	PASS
3	3810.4000	9.00	41.2	50.20	74.00	23.80	36.63	45.63	54.00	8.37	150	4	Horizontal	PASS
4	7063.3100	-9.05	52.85	43.80	68.23	24.43	49.84	40.79	54.00	13.21	150	36	Horizontal	PASS
5	10553.730	-3.37	51.89	48.52	68.23	19.71	50.00	46.63	54.00	7.37	150	10	Horizontal	PASS
6	12847.940	-0.53	49.42	48.89	68.23	19.34	46.58	46.05	54.00	7.95	150	262	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC40

Channel: 5310 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

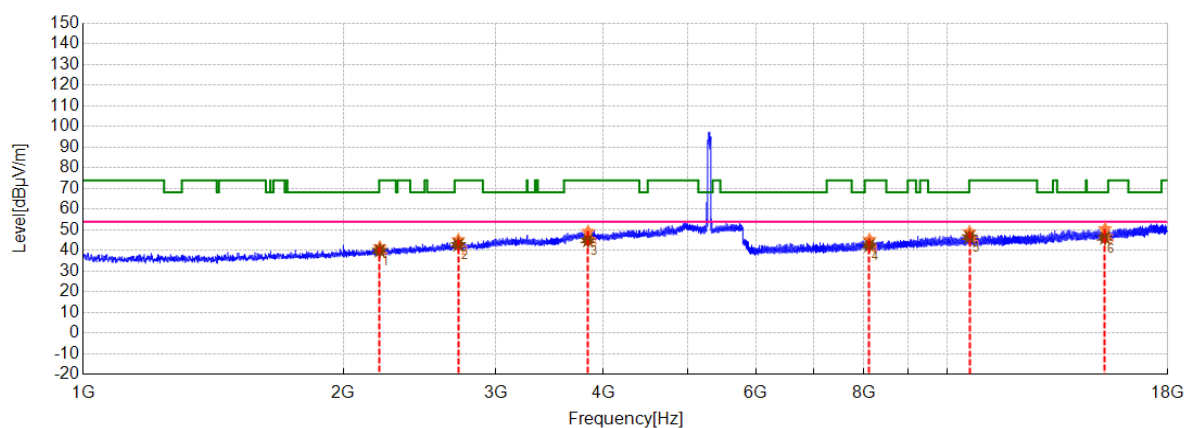
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2351.8000	2.97	38.78	41.75	74.00	32.25	36.55	39.52	54.00	14.48	150	200	Vertical	PASS
2	2942.2000	5.62	39.6	45.22	68.23	23.01	34.99	40.61	54.00	13.39	150	89	Vertical	PASS
3	3765.4000	8.50	41.07	49.57	74.00	24.43	38.07	46.57	54.00	7.43	150	4	Vertical	PASS
4	8759.7200	-6.75	52.35	45.60	68.23	22.63	49.30	42.55	54.00	11.45	150	76	Vertical	PASS
5	10617.780	-3.20	52.9	49.70	74.00	24.30	49.76	46.56	54.00	7.44	150	18	Vertical	PASS
6	14056.350	1.58	49.17	50.75	68.23	17.48	45.63	47.21	54.00	6.79	150	297	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC40

Channel: 5310 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

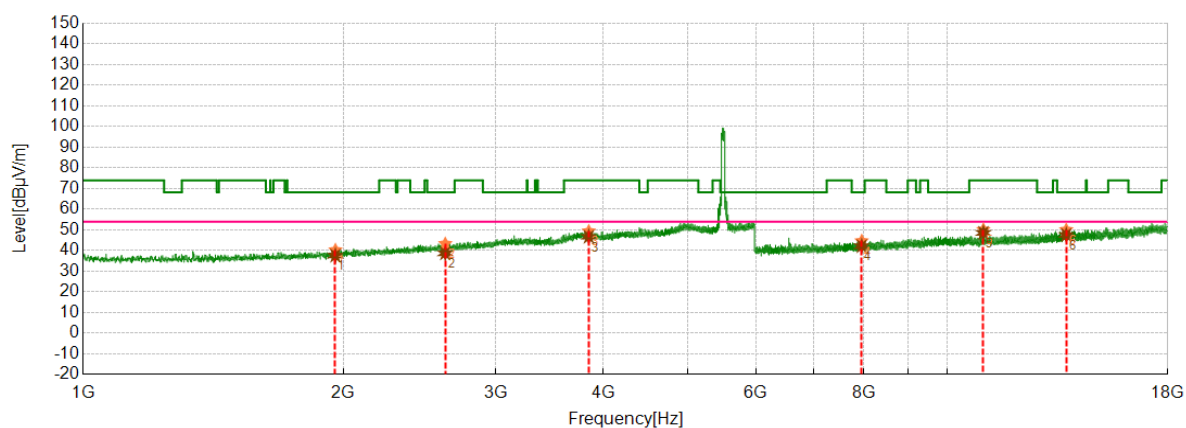
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2203.6000	2.47	39.17	41.64	74.00	32.36	37.50	39.97	54.00	14.03	150	224	Horizontal	PASS
2	2716.6000	4.79	40.34	45.13	74.00	28.87	38.04	42.83	54.00	11.17	150	62	Horizontal	PASS
3	3839.2000	9.15	40.05	49.20	74.00	24.80	35.77	44.92	54.00	9.08	150	284	Horizontal	PASS
4	8125.9300	-7.91	53.15	45.24	74.00	28.76	50.39	42.48	54.00	11.52	150	241	Horizontal	PASS
5	10608.630	-3.05	52.03	48.98	74.00	25.02	49.56	46.51	54.00	7.49	150	120	Horizontal	PASS
6	15223.890	2.65	47.82	50.47	68.23	17.76	43.53	46.18	54.00	7.82	150	259	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC40

Channel: 5510 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

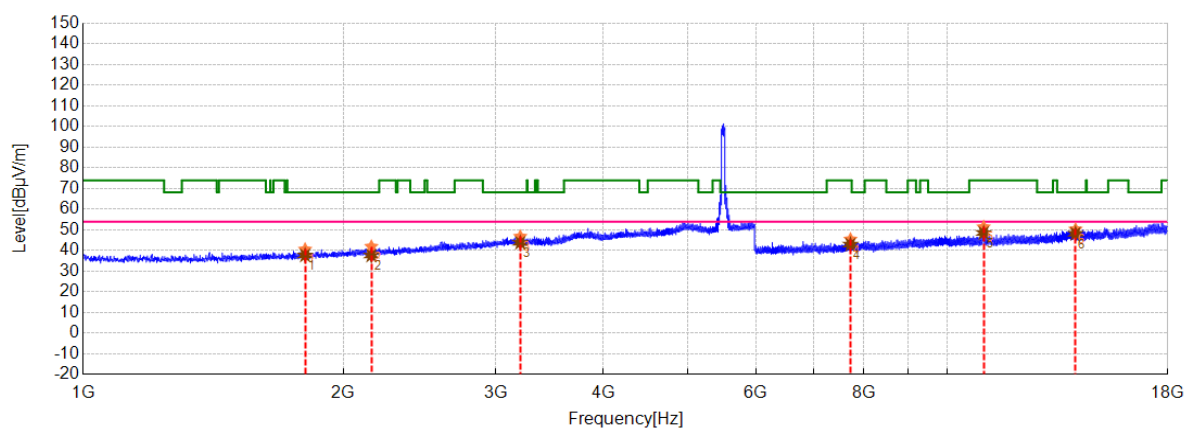
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1957.5000	1.70	38.59	40.29	68.23	27.94	35.87	37.57	54.00	16.43	150	191	Vertical	PASS
2	2623.1250	4.29	39.07	43.36	68.23	24.87	34.42	38.71	54.00	15.29	150	90	Vertical	PASS
3	3845.6250	9.12	40.32	49.44	74.00	24.56	37.59	46.71	54.00	7.29	150	281	Vertical	PASS
4	7959.6000	-7.62	52.31	44.69	68.23	23.54	49.79	42.17	54.00	11.83	150	152	Vertical	PASS
5	11008.200	-3.08	53.26	50.18	74.00	23.82	51.65	48.57	54.00	5.43	150	47	Vertical	PASS
6	13729.200	0.27	49.85	50.12	68.23	18.11	47.33	47.60	54.00	6.40	150	318	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC40

Channel: 5510 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

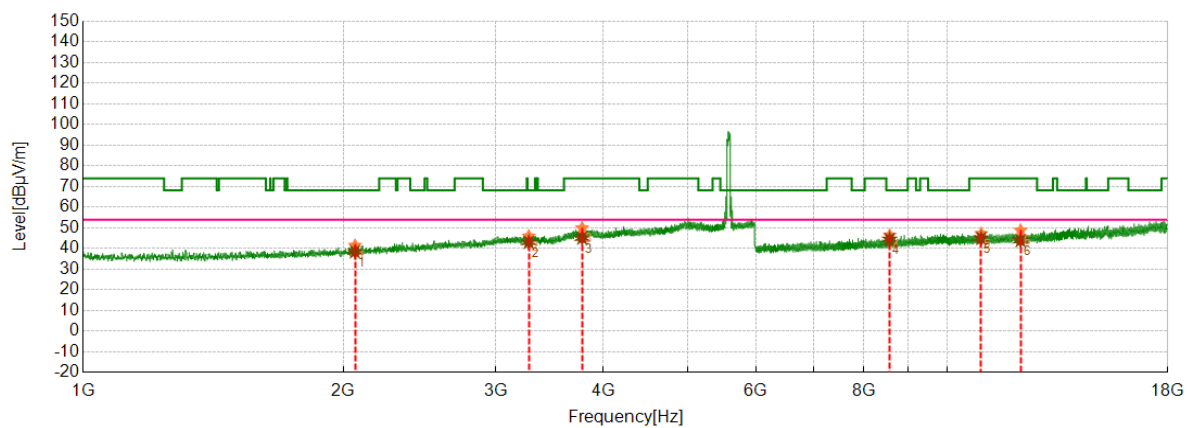
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1805.6250	1.02	39.58	40.60	68.23	27.63	36.68	37.70	54.00	16.30	150	114	Horizontal	PASS
2	2154.3750	2.38	39.59	41.97	68.23	26.26	35.26	37.64	54.00	16.36	150	255	Horizontal	PASS
3	3203.7500	6.47	40.36	46.83	68.23	21.40	37.31	43.78	54.00	10.22	150	35	Horizontal	PASS
4	7724.4000	-8.51	53.97	45.46	74.00	28.54	51.44	42.93	54.00	11.07	150	330	Horizontal	PASS
5	11015.400	-3.17	54.57	51.40	74.00	22.60	51.70	48.53	54.00	5.47	150	337	Horizontal	PASS
6	14072.400	1.57	48.77	50.34	68.23	17.89	46.62	48.19	54.00	5.81	150	208	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AC40

Channel: 5590 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2062.5000	1.85	39.66	41.51	68.23	26.72	36.63	38.48	54.00	15.52	150	346	Vertical	PASS
2	3277.5000	6.60	39.43	46.03	68.23	22.20	36.48	43.08	54.00	10.92	150	122	Vertical	PASS
3	3778.1250	8.73	41.27	50.00	74.00	24.00	36.35	45.08	54.00	8.92	150	266	Vertical	PASS
4	8574.6000	-7.22	53.67	46.45	68.23	21.78	51.71	44.49	54.00	9.51	150	173	Vertical	PASS
5	10945.800	-3.29	50.52	47.23	74.00	26.77	48.24	44.95	54.00	9.05	150	127	Vertical	PASS
6	12154.200	-1.17	50.03	48.86	74.00	25.14	45.03	43.86	54.00	10.14	150	303	Vertical	PASS

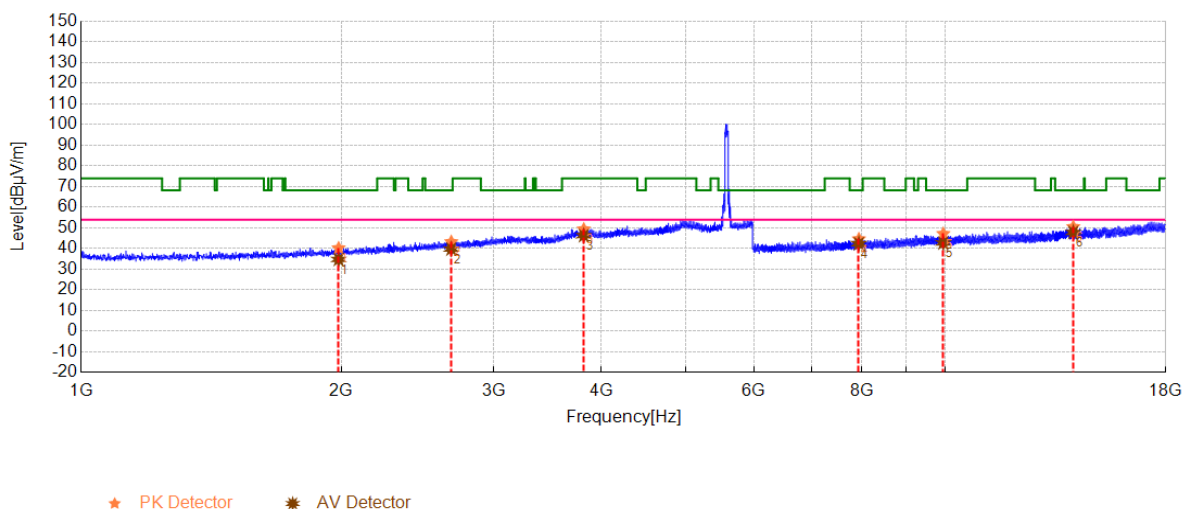
Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC40

Channel: 5590 MHz

Test Graph



Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1985.0000	1.82	38.47	40.29	68.23	27.94	32.96	34.78	54.00	19.22	150	188	Horizontal	PASS
2	2680.0000	4.46	38.82	43.28	68.23	24.95	35.35	39.81	54.00	14.19	150	275	Horizontal	PASS
3	3815.0000	8.81	40.62	49.43	74.00	24.57	37.48	46.29	54.00	7.71	150	127	Horizontal	PASS
4	7941.6000	-8.11	52.76	44.65	68.23	23.58	50.49	42.38	54.00	11.62	150	119	Horizontal	PASS
5	9945.0000	-3.89	51.1	47.21	68.23	21.02	46.64	42.75	54.00	11.25	150	141	Horizontal	PASS
6	14062.800	1.48	49.07	50.55	68.23	17.68	46.39	47.87	54.00	6.13	150	21	Horizontal	PASS

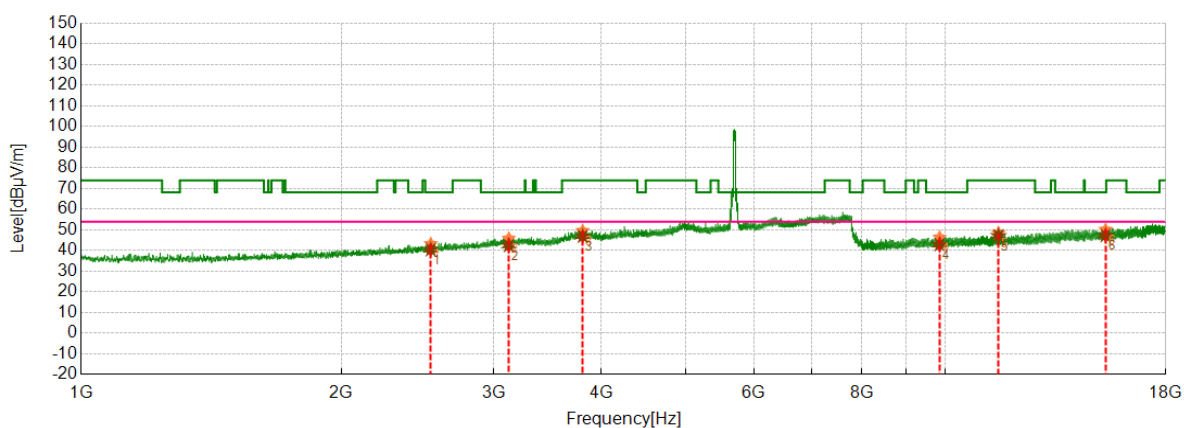
Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC40

Channel: 5710 MHz

Test Graph



★ PK Detector ★ AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2537.4800	3.68	39.64	43.32	68.23	24.91	36.75	40.43	54.00	13.57	150	360	Vertical	PASS
2	3124.3200	6.48	39.47	45.95	68.23	22.28	35.99	42.47	54.00	11.53	150	277	Vertical	PASS
3	3804.3200	8.70	41	49.70	74.00	24.30	38.24	46.94	54.00	7.06	150	263	Vertical	PASS
4	9847.6500	-4.13	50.57	46.44	68.23	21.79	47.04	42.91	54.00	11.09	150	188	Vertical	PASS
5	11521.980	-2.26	50.87	48.61	74.00	25.39	49.38	47.12	54.00	6.88	150	31	Vertical	PASS
6	15326.580	2.93	47.3	50.23	68.23	18.00	44.39	47.32	54.00	6.68	150	194	Vertical	PASS

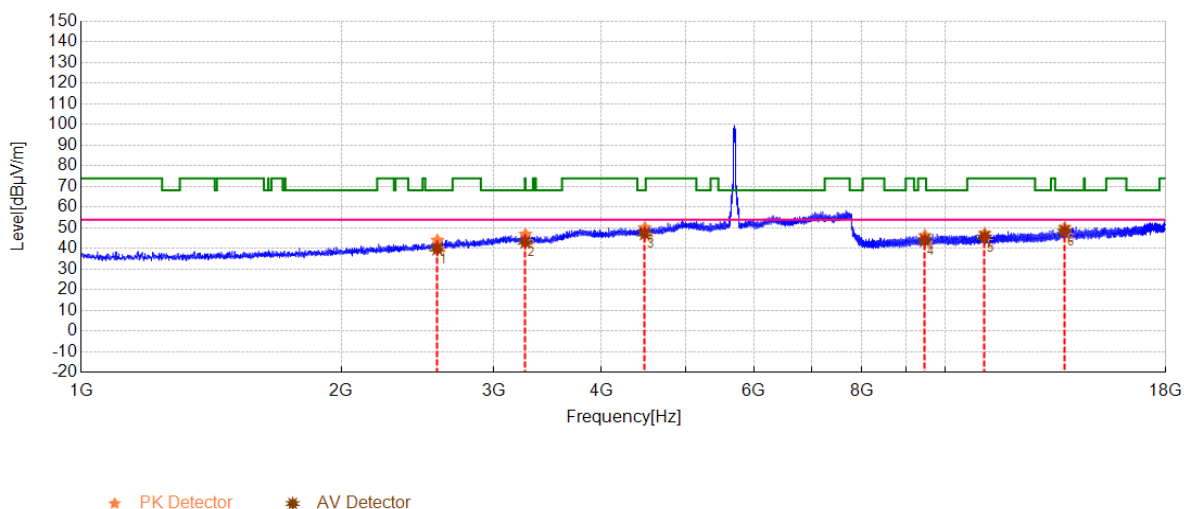
Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC40

Channel: 5710 MHz

Test Graph



Final Data List

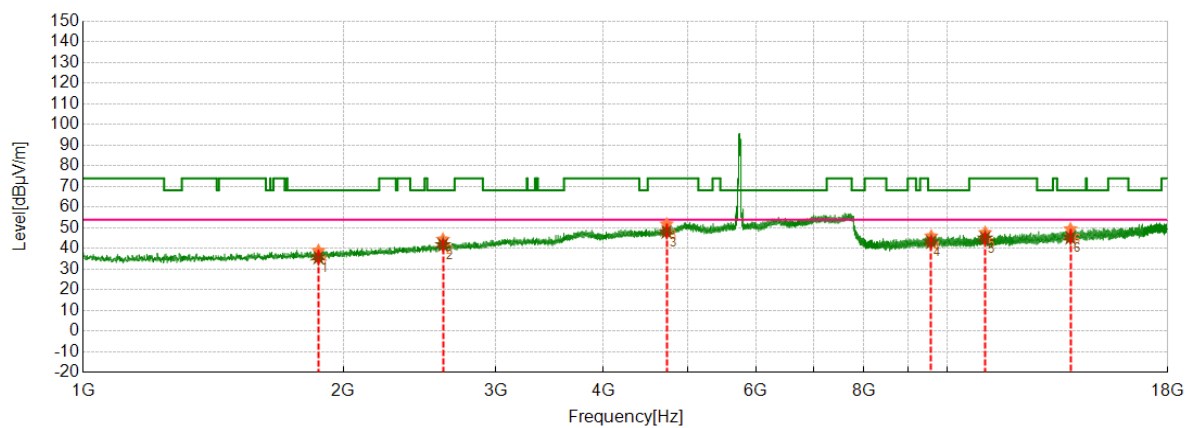
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2583.0400	4.01	39.98	43.99	68.23	24.24	35.96	39.97	54.00	14.03	150	349	Horizontal	PASS
2	3265.7600	6.66	40.23	46.89	74.00	27.11	36.59	43.25	54.00	10.75	150	100	Horizontal	PASS
3	4489.0800	11.45	38.64	50.09	68.23	18.14	35.85	47.30	54.00	6.70	150	349	Horizontal	PASS
4	9469.7400	-5.11	51.37	46.26	74.00	27.74	49.07	43.96	54.00	10.04	150	330	Horizontal	PASS
5	11105.820	-2.74	49.97	47.23	74.00	26.77	48.28	45.54	54.00	8.46	150	330	Horizontal	PASS
6	13744.560	0.22	49.93	50.15	68.23	18.08	48.14	48.36	54.00	5.64	150	32	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC40

Channel: 5755 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

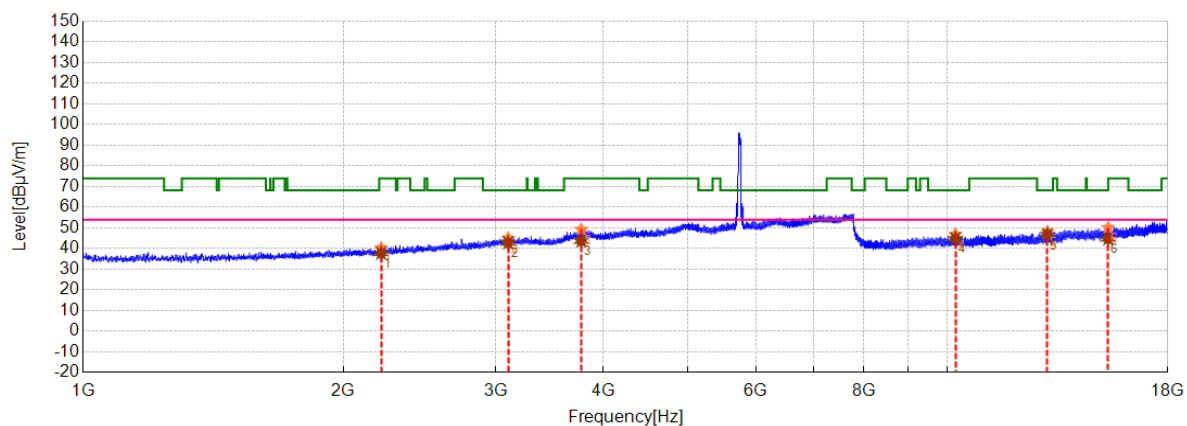
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1871.0800	1.44	37.63	39.07	68.23	29.16	34.21	35.65	54.00	18.35	150	50	Vertical	PASS
2	2607.5200	4.12	40.35	44.47	68.23	23.76	37.65	41.77	54.00	12.23	150	340	Vertical	PASS
3	4732.5200	12.25	39.61	51.86	74.00	22.14	35.86	48.11	54.00	5.89	150	130	Vertical	PASS
4	9579.3900	-4.72	50.75	46.03	68.23	22.20	47.91	43.19	54.00	10.81	150	4	Vertical	PASS
5	11059.920	-2.60	50.3	47.70	74.00	26.30	47.62	45.02	54.00	8.98	150	97	Vertical	PASS
6	13883.280	1.35	48.14	49.49	68.23	18.74	43.94	45.29	54.00	8.71	150	28	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AC40

Channel: 5755 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

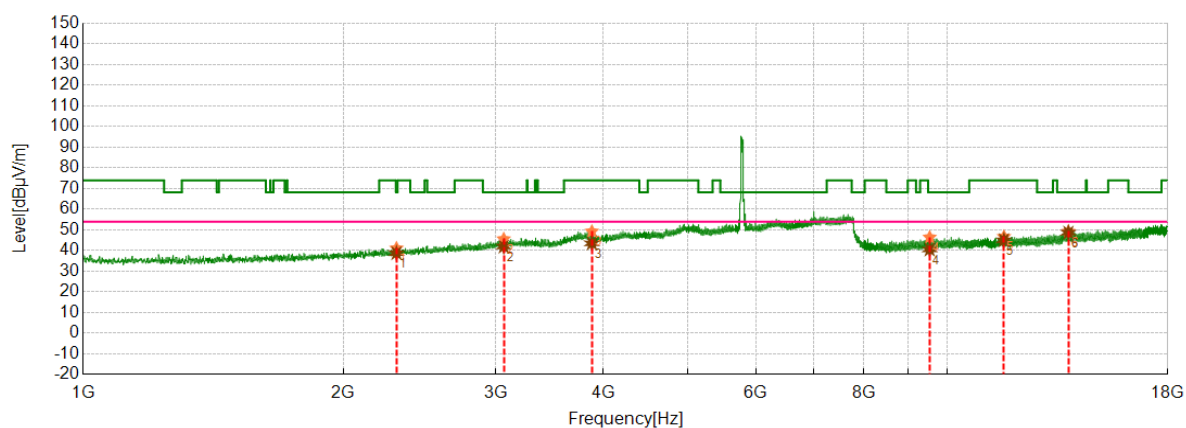
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2211.0800	2.58	37.7	40.28	74.00	33.72	35.13	37.71	54.00	16.29	150	262	Horizontal	PASS
2	3101.8800	6.43	38.56	44.99	68.23	23.24	36.36	42.79	54.00	11.21	150	146	Horizontal	PASS
3	3768.9600	8.68	40.59	49.27	74.00	24.73	35.00	43.68	54.00	10.32	150	240	Horizontal	PASS
4	10216.890	-4.04	50.95	46.91	68.23	21.32	48.83	44.79	54.00	9.21	150	350	Horizontal	PASS
5	13058.610	0.44	47.73	48.17	68.23	20.06	46.29	46.73	54.00	7.27	150	282	Horizontal	PASS
6	15353.610	2.81	47.33	50.14	74.00	23.86	41.92	44.73	54.00	9.27	150	360	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC40

Channel: 5795 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

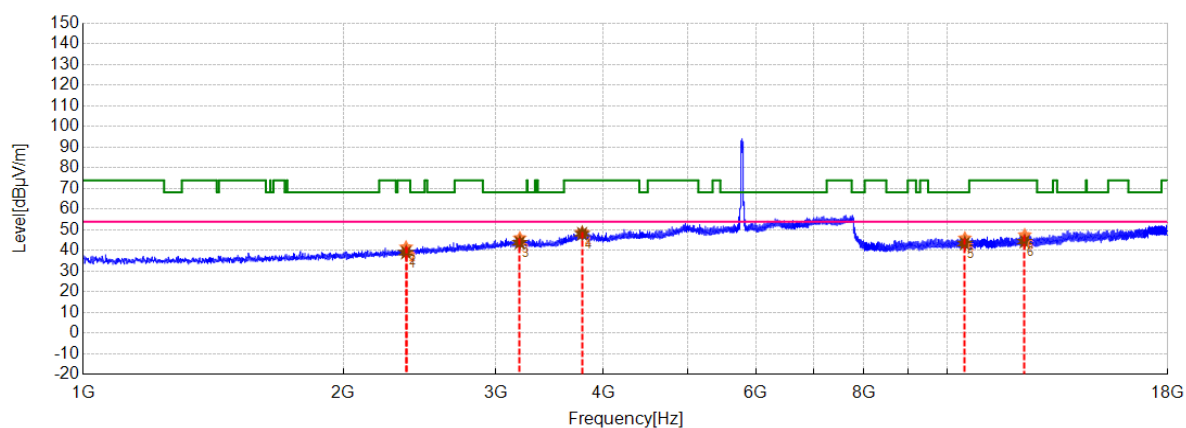
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2303.5600	2.66	38.48	41.14	68.23	27.09	36.12	38.78	54.00	15.22	150	72	Vertical	PASS
2	3065.8400	6.35	39.28	45.63	68.23	22.60	35.61	41.96	54.00	12.04	150	17	Vertical	PASS
3	3877.7600	8.98	40.34	49.32	74.00	24.68	34.54	43.52	54.00	10.48	150	93	Vertical	PASS
4	9540.1200	-4.60	51.06	46.46	68.23	21.77	45.15	40.55	54.00	13.45	150	84	Vertical	PASS
5	11627.550	-1.83	48.6	46.77	74.00	27.23	46.87	45.04	54.00	8.96	150	298	Vertical	PASS
6	13807.800	1.11	48.16	49.27	68.23	18.96	47.61	48.72	54.00	5.28	150	298	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AC40

Channel: 5795 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

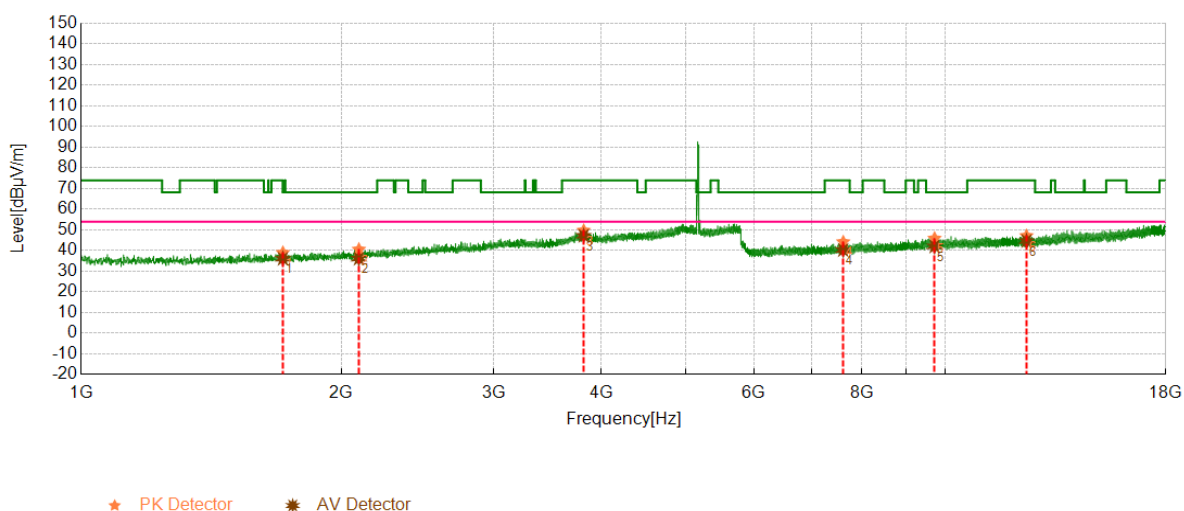
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2363.4000	2.93	38.72	41.65	74.00	32.35	36.12	39.05	54.00	14.95	150	241	Horizonta	PASS
2	2363.4000	2.93	38.72	41.65	74.00	32.35	37.24	40.17	54.00	13.83	150	241	Horizonta	PASS
3	3199.8000	6.40	39.68	46.08	68.23	22.15	37.45	43.85	54.00	10.15	150	244	Horizonta	PASS
4	3778.4800	8.74	40.12	48.86	74.00	25.14	39.45	48.19	54.00	5.81	150	307	Horizonta	PASS
5	10477.500	-3.69	49.73	46.04	68.23	22.19	47.12	43.43	54.00	10.57	150	205	Horizonta	PASS
6	12290.550	-1.25	48.82	47.57	74.00	26.43	45.64	44.39	54.00	9.61	150	54	Horizonta	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX20

Channel: 5180 MHz

Test Graph

Final Data List

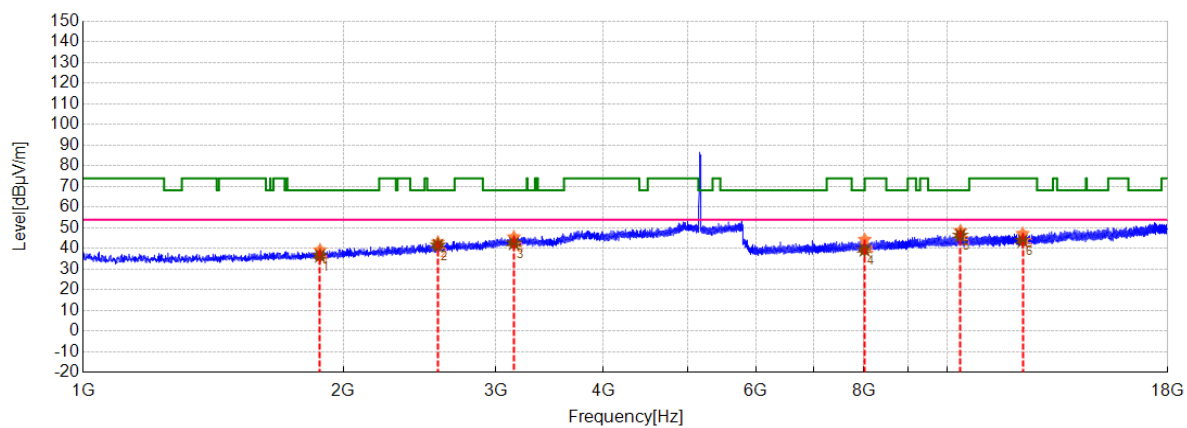
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1711.0000	0.71	38.29	39.00	68.23	29.23	35.38	36.09	54.00	17.91	150	330	Vertical	PASS
2	2095.0000	2.13	38.45	40.58	68.23	27.65	34.02	36.15	54.00	17.85	150	130	Vertical	PASS
3	3814.0000	8.85	40.89	49.74	74.00	24.26	38.36	47.21	54.00	6.79	150	20	Vertical	PASS
4	7617.1900	-8.94	53.13	44.19	74.00	29.81	49.25	40.31	54.00	13.69	150	30	Vertical	PASS
5	9717.4200	-4.70	50.59	45.89	68.23	22.34	46.75	42.05	54.00	11.95	150	150	Vertical	PASS
6	12415.450	-1.34	48.51	47.17	74.00	26.83	46.00	44.66	54.00	9.34	150	30	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5180 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

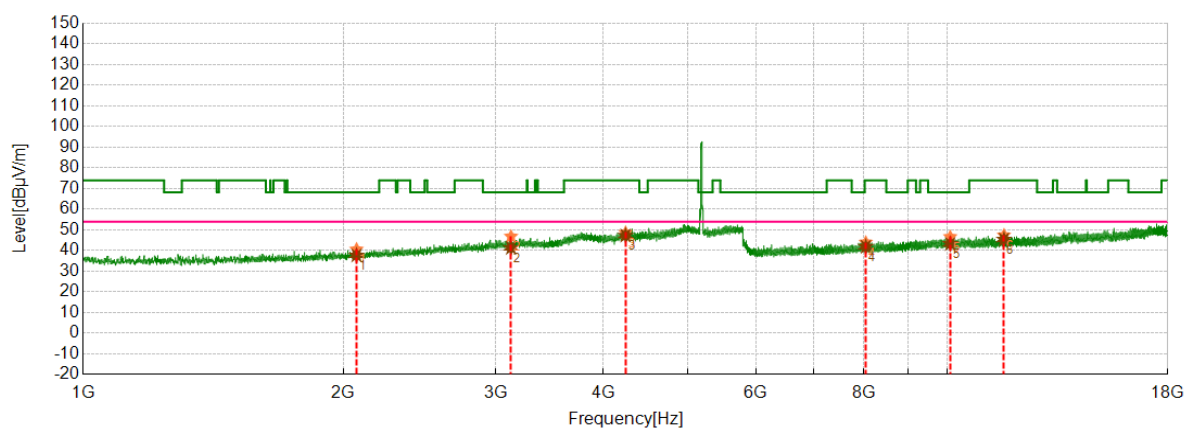
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1879.0000	1.44	37.9	39.34	68.23	28.89	35.04	36.48	54.00	17.52	150	80	Horizontal	PASS
2	2572.6000	3.98	39.09	43.07	68.23	25.16	37.51	41.49	54.00	12.51	150	340	Horizontal	PASS
3	3150.4000	6.46	39.16	45.62	68.23	22.61	36.08	42.54	54.00	11.46	150	240	Horizontal	PASS
4	8022.8400	-7.43	51.82	44.39	68.23	23.84	46.83	39.40	54.00	14.60	150	180	Horizontal	PASS
5	10354.870	-3.94	52.52	48.58	68.23	19.65	50.29	46.35	54.00	7.65	150	330	Horizontal	PASS
6	12223.300	-1.32	48.59	47.27	74.00	26.73	45.09	43.77	54.00	10.23	150	310	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX20

Channel: 5200 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2071.0000	2.06	38.57	40.63	68.23	27.60	35.66	37.72	54.00	16.28	150	110	Vertical	PASS
2	3125.8000	6.46	40.43	46.89	68.23	21.34	34.89	41.35	54.00	12.65	150	180	Vertical	PASS
3	4241.8000	10.20	38.52	48.72	74.00	25.28	37.14	47.34	54.00	6.66	150	230	Vertical	PASS
4	8047.2400	-7.84	51.85	44.01	74.00	29.99	49.73	41.89	54.00	12.11	150	200	Vertical	PASS
5	10077.320	-3.77	50.48	46.71	68.23	21.52	47.06	43.29	54.00	10.71	150	290	Vertical	PASS
6	11629.770	-2.03	49.51	47.48	74.00	26.52	47.44	45.41	54.00	8.59	150	120	Vertical	PASS

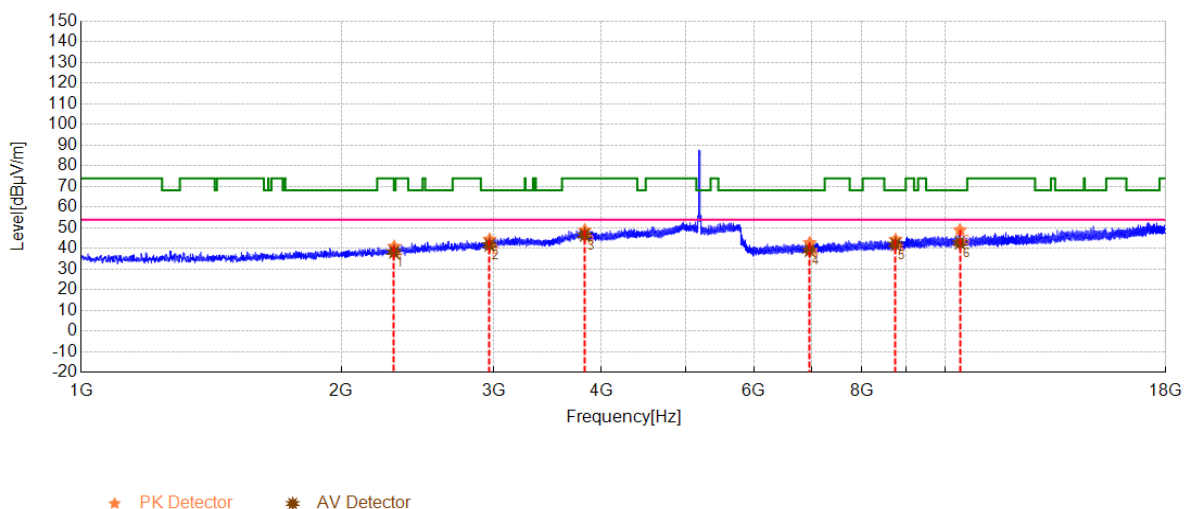
Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX20

Channel: 5200 MHz

Test Graph



Final Data List

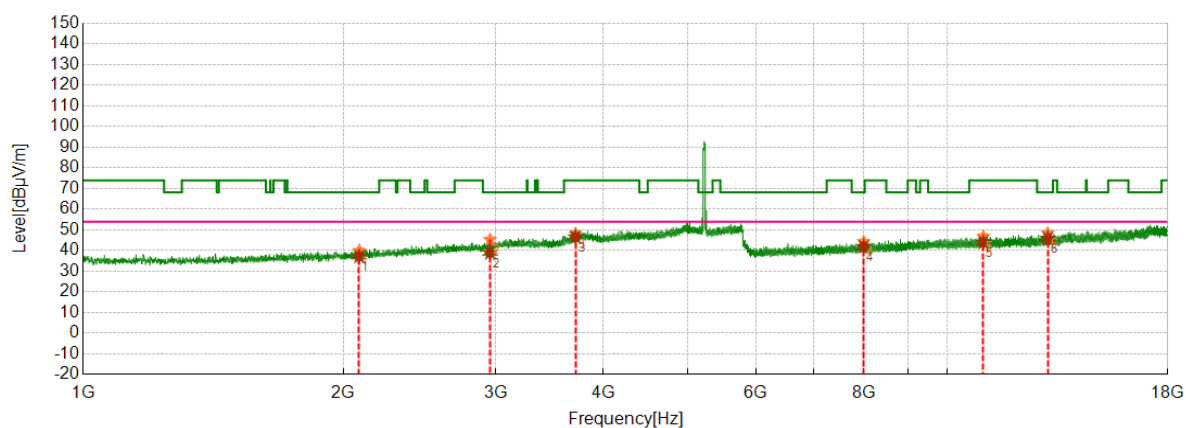
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2301.4000	2.70	38.3	41.00	68.23	27.23	35.59	38.29	54.00	15.71	150	130	Horizontal	PASS
2	2968.6000	5.82	38.61	44.43	68.23	23.80	35.93	41.75	54.00	12.25	150	120	Horizontal	PASS
3	3825.4000	8.68	40.22	48.90	74.00	25.10	37.83	46.51	54.00	7.49	150	300	Horizontal	PASS
4	6967.5400	-9.79	52.58	42.79	68.23	25.44	48.97	39.18	54.00	14.82	150	190	Horizontal	PASS
5	8757.2800	-6.77	51.15	44.38	68.23	23.85	48.74	41.97	54.00	12.03	150	320	Horizontal	PASS
6	10396.350	-3.89	52.87	48.98	68.23	19.25	46.64	42.75	54.00	11.25	150	300	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX20

Channel: 5240 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

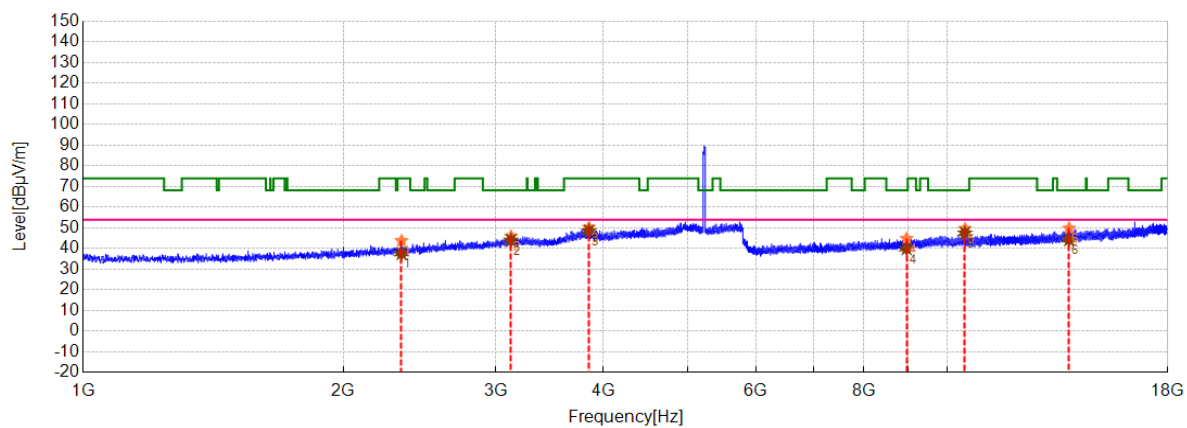
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2086.0000	2.02	38	40.02	68.23	28.21	35.11	37.13	54.00	16.87	150	100	Vertical	PASS
2	2956.0000	5.82	39.58	45.40	68.23	22.83	33.10	38.92	54.00	15.08	150	330	Vertical	PASS
3	3712.0000	8.31	39.84	48.15	74.00	25.85	38.25	46.56	54.00	7.44	150	260	Vertical	PASS
4	8002.1000	-7.74	52.03	44.29	68.23	23.94	49.60	41.86	54.00	12.14	150	260	Vertical	PASS
5	11006.350	-3.06	50	46.94	74.00	27.06	47.01	43.95	54.00	10.05	150	110	Vertical	PASS
6	13069.370	0.14	48.26	48.40	68.23	19.83	45.75	45.89	54.00	8.11	150	40	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5240 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2335.0000	2.81	41	43.81	74.00	30.19	34.84	37.65	54.00	16.35	150	150	Horizontal	PASS
2	3126.4000	6.45	39.54	45.99	68.23	22.24	37.55	44.00	54.00	10.00	150	100	Horizontal	PASS
3	3847.6000	9.09	41.15	50.24	74.00	23.76	39.37	48.46	54.00	5.54	150	130	Horizontal	PASS
4	8970.7800	-6.45	51.33	44.88	68.23	23.35	46.47	40.02	54.00	13.98	150	60	Horizontal	PASS
5	10481.140	-3.72	53.36	49.64	68.23	18.59	51.19	47.47	54.00	6.53	150	140	Horizontal	PASS
6	13831.260	1.50	48.36	49.86	68.23	18.37	42.82	44.32	54.00	9.68	150	20	Horizontal	PASS

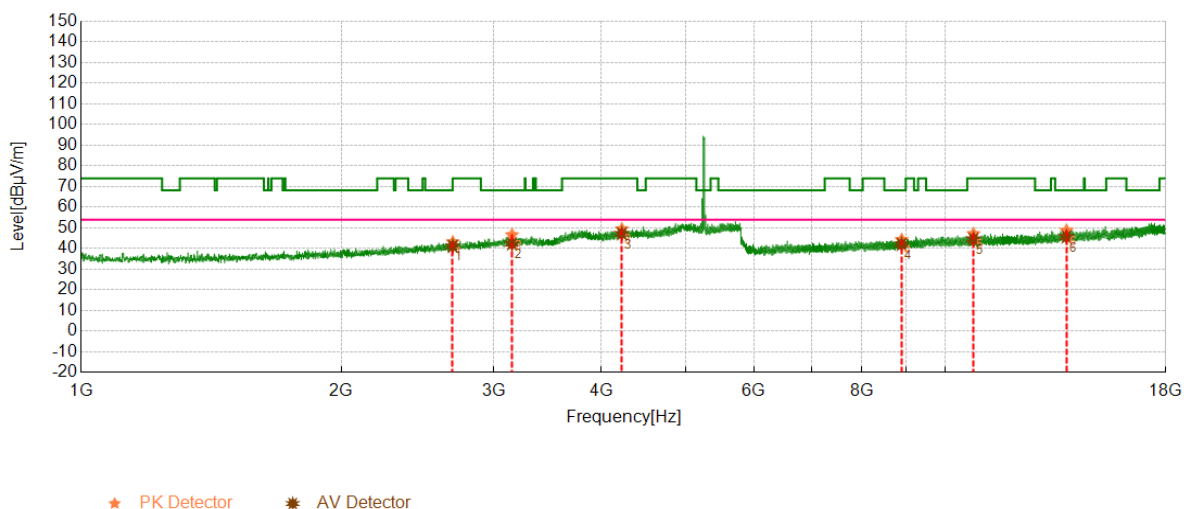
Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5260 MHz

Test Graph



Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2690.8000	4.52	38.64	43.16	74.00	30.84	36.65	41.17	54.00	12.83	150	260	Vertical	PASS
2	3151.0000	6.45	40.2	46.65	68.23	21.58	35.88	42.33	54.00	11.67	150	140	Vertical	PASS
3	4222.6000	10.40	39.07	49.47	74.00	24.53	36.83	47.23	54.00	6.77	150	300	Vertical	PASS
4	8900.6300	-6.53	50.81	44.28	68.23	23.95	48.63	42.10	54.00	11.90	150	220	Vertical	PASS
5	10779.430	-3.19	50.35	47.16	74.00	26.84	47.76	44.57	54.00	9.43	150	80	Vertical	PASS
6	13812.960	1.15	47.62	48.77	68.23	19.46	44.56	45.71	54.00	8.29	150	0	Vertical	PASS

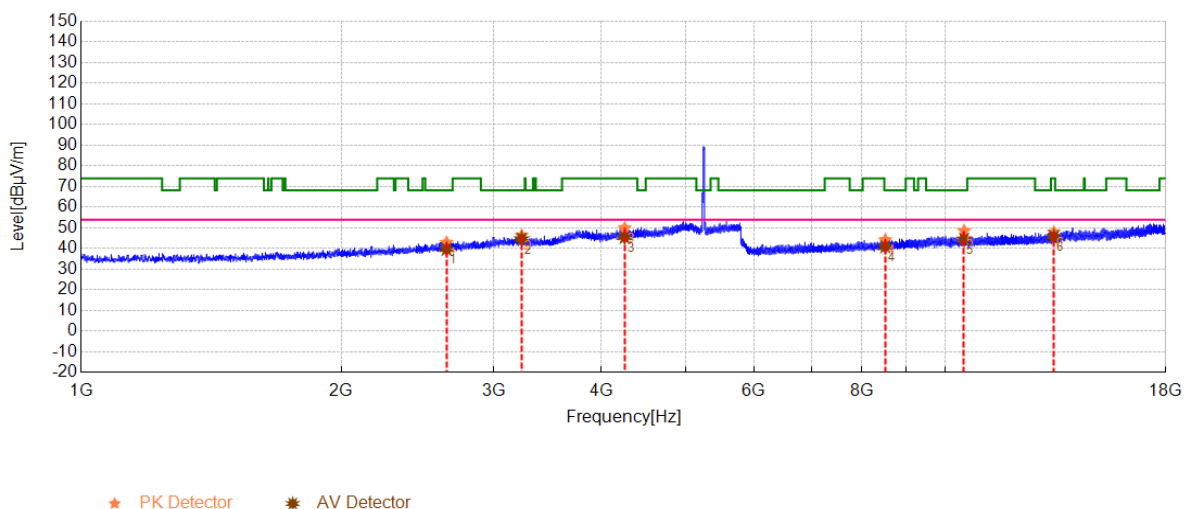
Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5260 MHz

Test Graph



Final Data List

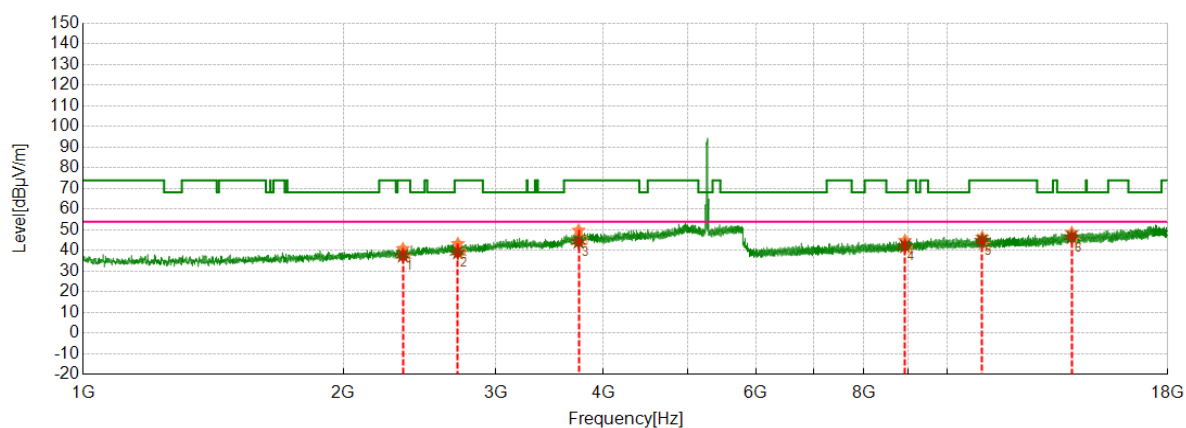
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2647.0000	4.29	38.67	42.96	68.23	25.27	35.45	39.74	54.00	14.26	150	100	Horizontal	PASS
2	3233.2000	6.54	39.8	46.34	68.23	21.89	38.14	44.68	54.00	9.32	150	290	Horizontal	PASS
3	4253.8000	10.35	39.61	49.96	74.00	24.04	35.16	45.51	54.00	8.49	150	290	Horizontal	PASS
4	8519.9900	-7.47	51.69	44.22	68.23	24.01	48.41	40.94	54.00	13.06	150	30	Horizontal	PASS
5	10514.080	-3.61	52.2	48.59	68.23	19.64	48.07	44.46	54.00	9.54	150	0	Horizontal	PASS
6	13356.680	0.74	47.25	47.99	74.00	26.01	45.06	45.80	54.00	8.20	150	260	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: AX20

Channel: 5280 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

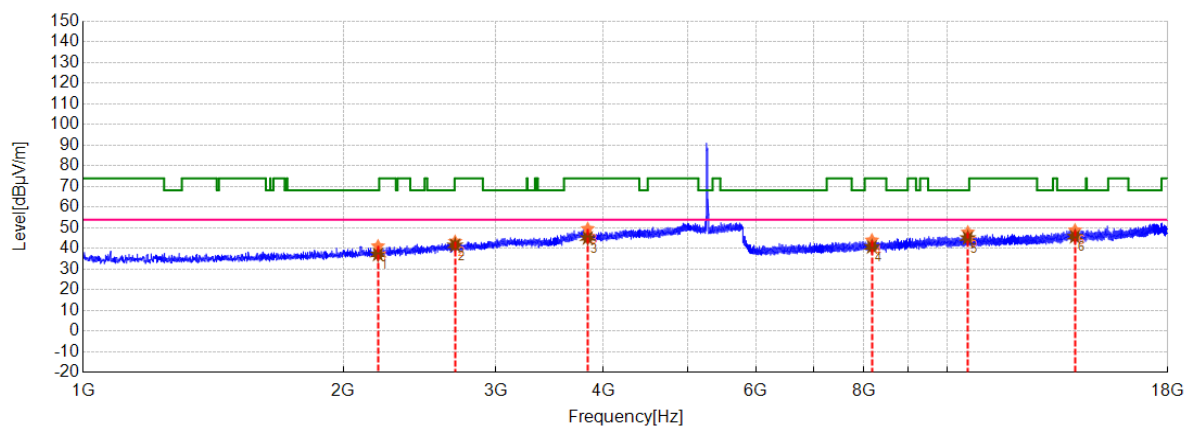
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2343.4000	2.93	37.98	40.91	74.00	33.09	34.60	37.53	54.00	16.47	150	340	Vertical	PASS
2	2713.6000	4.80	38.51	43.31	74.00	30.69	34.30	39.10	54.00	14.90	150	330	Vertical	PASS
3	3743.2000	8.65	41.14	49.79	74.00	24.21	35.58	44.23	54.00	9.77	150	30	Vertical	PASS
4	8932.9600	-6.25	51.06	44.81	68.23	23.42	48.43	42.18	54.00	11.82	150	310	Vertical	PASS
5	10974.630	-3.36	49.77	46.41	74.00	27.59	48.09	44.73	54.00	9.27	150	50	Vertical	PASS
6	13931.300	0.44	48.16	48.60	68.23	19.63	46.02	46.46	54.00	7.54	150	120	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5280 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

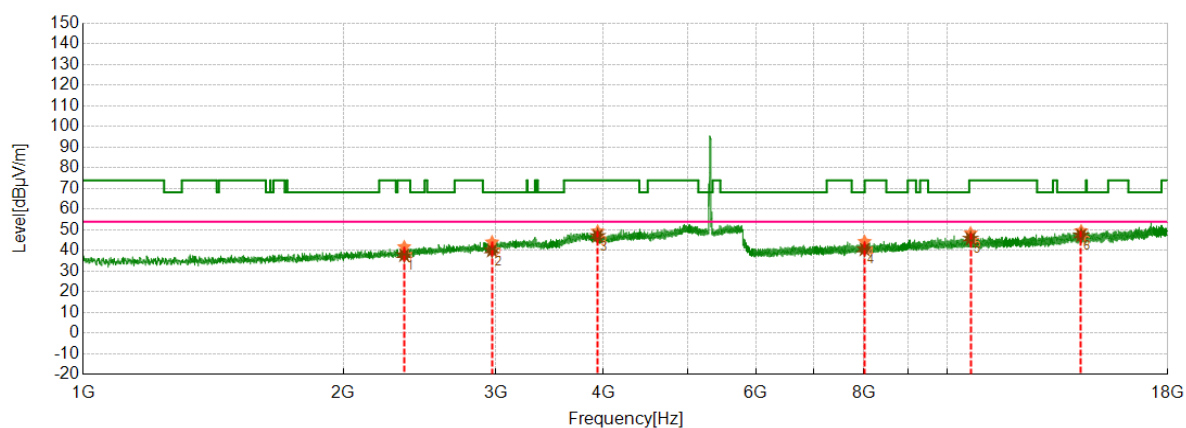
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2192.8000	2.37	38.84	41.21	68.23	27.02	34.82	37.19	54.00	16.81	150	190	Horizontal	PASS
2	2693.2000	4.38	39.05	43.43	74.00	30.57	37.22	41.60	54.00	12.40	150	30	Horizontal	PASS
3	3835.0000	8.96	40.66	49.62	74.00	24.38	36.18	45.14	54.00	8.86	150	280	Horizontal	PASS
4	8179.0000	-7.71	51.75	44.04	74.00	29.96	48.54	40.83	54.00	13.17	150	270	Horizontal	PASS
5	10561.050	-3.22	51.15	47.93	68.23	20.30	48.35	45.13	54.00	8.87	150	10	Horizontal	PASS
6	14051.470	1.75	47.17	48.92	68.23	19.31	44.05	45.80	54.00	8.20	150	210	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5320 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

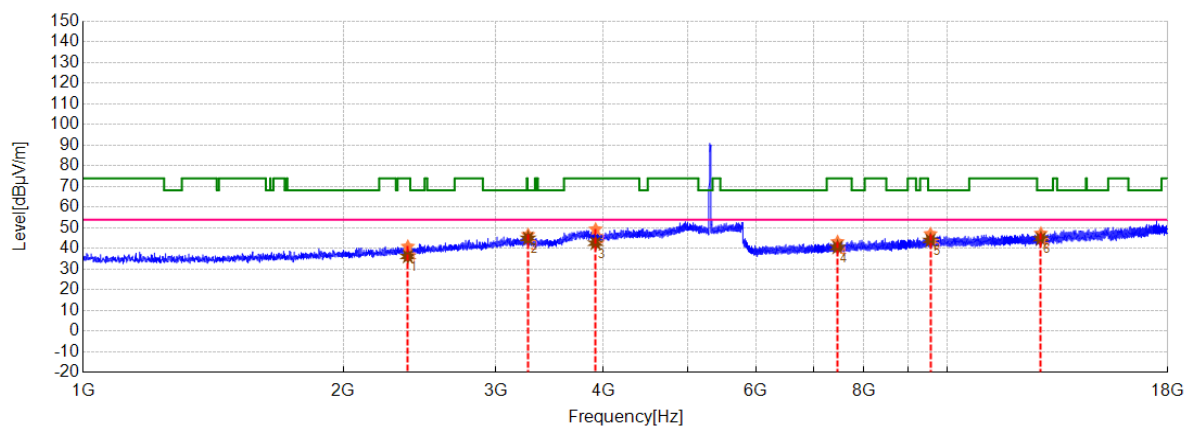
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2351.8000	2.97	38.82	41.79	74.00	32.21	34.84	37.81	54.00	16.19	150	180	Vertical	PASS
2	2971.6000	5.83	38.26	44.09	68.23	24.14	34.24	40.07	54.00	13.93	150	130	Vertical	PASS
3	3937.6000	9.08	40.25	49.33	74.00	24.67	38.02	47.10	54.00	6.90	150	100	Vertical	PASS
4	8021.6200	-7.41	51.75	44.34	68.23	23.89	48.03	40.62	54.00	13.38	150	240	Vertical	PASS
5	10640.350	-3.42	51.86	48.44	74.00	25.56	49.25	45.83	54.00	8.17	150	200	Vertical	PASS
6	14285.710	1.25	48.27	49.52	68.23	18.71	46.13	47.38	54.00	6.62	150	330	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: AX20

Channel: 5320 MHz

Test Graph


★ PK Detector ★ AV Detector

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2374.6000	2.99	38.05	41.04	74.00	32.96	33.23	36.22	54.00	17.78	150	60	Horizontal	PASS
2	3271.6000	6.64	40.06	46.70	68.23	21.53	38.32	44.96	54.00	9.04	150	340	Horizontal	PASS
3	3916.6000	9.27	40.12	49.39	74.00	24.61	33.36	42.63	54.00	11.37	150	150	Horizontal	PASS
4	7462.8600	-9.10	52.39	43.29	74.00	30.71	49.69	40.59	54.00	13.41	150	330	Horizontal	PASS
5	9560.0400	-4.22	51.35	47.13	68.23	21.10	48.23	44.01	54.00	9.99	150	280	Horizontal	PASS
6	12831.470	-0.47	47.81	47.34	68.23	20.89	45.25	44.78	54.00	9.22	150	80	Horizontal	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level