



SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

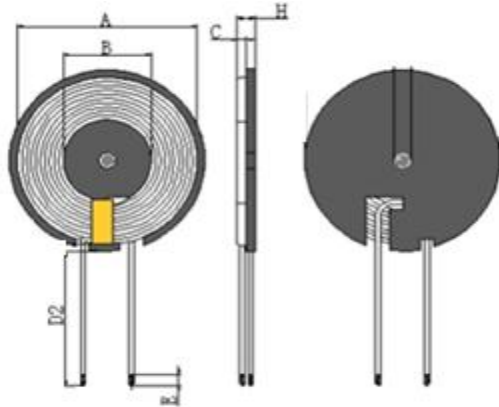

2. SCHEMATICS:



1. 线圈贴磁片，磁片尺寸
43.5mm, , 厚度为 0.8 ± 0.5 mm
开L线槽。

2. 线圈出线位置

缠胶纸 1-2Ts;

3, 磁片背面加9448/3M背胶

A	B	C	D2	E	H				I
43.5 $\pm$ 0.5	20 $\pm$ 1	0.8 $\pm$ 0.5	12 $\pm$ 3	3 $\pm$ 2	1.8MAX				

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	热风线 $\varnothing$ 0.08*24mm 2UEW	10TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR	L	Q值	HI-POT
TEST	线圈加磁片	S-F	单独线圈		
CON	100KHz, 0.25V	AT 25℃	100KHz, 0.25V		
SPEC	6.5uH $\pm$ 10%	80m Ω Max	3.8uH $\pm$ 15%		

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	0.08*24股	热风0.08*24*2P	NANJINGJINNINGCO,LTD	
2	无铅锡条	无铅锡条	QIAODO	
3	磁片	$\varnothing$ 43.5*0.8锰锌硬磁片开L槽	TAIYI CO.,LTD	
4	胶水	黄胶9999	LIANCHENG CO.,LTD	
5	高温胶纸	8mm宽高温胶纸	CUDAK CO.,LTD	
6	背胶	磁片背面加9448/3M背胶	CUDAK CO.,LTD	

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	G43.5开槽 /磁吸线圈
DRAWN BY	CHECKED BY		APPROVED BY
何伟华	韦立红		韦立红