



Mode	57																																																																																									
	Band Edge - L																																																																																									
	2400-2483.5_802.11be EHT40_CH03_2422MHz																																																																																									
ANT	8+9																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-07-22 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.63</td><td>62.04</td><td>74.00 -11.96</td><td>50.09</td><td>26.90</td><td>8.10</td><td>32.58</td><td>9.53</td><td>100</td><td>252 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.63	62.04	74.00 -11.96	50.09	26.90	8.10	32.58	9.53	100	252 Peak	Level (dBuV/m) Date: 2026-07-22 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2422.00</td><td>107.02</td><td>-----</td><td>94.91</td><td>27.00</td><td>8.19</td><td>32.61</td><td>9.53</td><td>100</td><td>252 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2422.00	107.02	-----	94.91	27.00	8.19	32.61	9.53	100	252 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.63	62.04	74.00 -11.96	50.09	26.90	8.10	32.58	9.53	100	252 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2422.00	107.02	-----	94.91	27.00	8.19	32.61	9.53	100	252 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-07-22 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.97</td><td>50.77</td><td>54.00 -3.23</td><td>38.82</td><td>26.90</td><td>8.10</td><td>32.58</td><td>9.53</td><td>100</td><td>252 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.97	50.77	54.00 -3.23	38.82	26.90	8.10	32.58	9.53	100	252 Average	Level (dBuV/m) Date: 2026-07-22 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2422.00</td><td>97.21</td><td>-----</td><td>85.11</td><td>27.00</td><td>8.18</td><td>32.61</td><td>9.53</td><td>100</td><td>252 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2422.00	97.21	-----	85.11	27.00	8.18	32.61	9.53	100	252 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.97	50.77	54.00 -3.23	38.82	26.90	8.10	32.58	9.53	100	252 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2422.00	97.21	-----	85.11	27.00	8.18	32.61	9.53	100	252 Average																																																																																	



Mode	57										
	Band Edge - R										
	2400-2483.5_802.11be EHT40_CH03_2422MHz										
ANT	8+9										
Pol.	Horizontal						Fundamental				
Peak											



Mode	57																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_802.11be EHT40_CH03_2422MHz																																																																																	
ANT	8+9																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2026-07-22 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2388.29</td><td>60.00</td><td>74.00 -14.00</td><td>48.05</td><td>26.90</td><td>8.10</td><td>32.58</td><td>9.53</td><td>100</td><td>347 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2388.29	60.00	74.00 -14.00	48.05	26.90	8.10	32.58	9.53	100	347 Peak	Level (dBuV/m) Date: 2026-07-22 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2422.00</td><td>105.54</td><td>-----</td><td>93.43</td><td>27.00</td><td>8.19</td><td>32.61</td><td>9.53</td><td>100</td><td>347 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2422.00	105.54	-----	93.43	27.00	8.19	32.61	9.53	100	347 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2388.29	60.00	74.00 -14.00	48.05	26.90	8.10	32.58	9.53	100	347 Peak																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2422.00	105.54	-----	93.43	27.00	8.19	32.61	9.53	100	347 Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-07-22 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.97</td><td>48.30</td><td>54.00 -5.70</td><td>36.35</td><td>26.90</td><td>8.10</td><td>32.58</td><td>9.53</td><td>100</td><td>347 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.97	48.30	54.00 -5.70	36.35	26.90	8.10	32.58	9.53	100	347 Average	Level (dBuV/m) Date: 2026-07-22 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2422.00</td><td>96.52</td><td>-----</td><td>84.42</td><td>27.00</td><td>8.18</td><td>32.61</td><td>9.53</td><td>100</td><td>347 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2422.00	96.52	-----	84.42	27.00	8.18	32.61	9.53	100	347 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2389.97	48.30	54.00 -5.70	36.35	26.90	8.10	32.58	9.53	100	347 Average																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2422.00	96.52	-----	84.42	27.00	8.18	32.61	9.53	100	347 Average																																																																									



Mode	57										
	Band Edge - R										
	2400-2483.5_802.11be EHT40_CH03_2422MHz										
ANT	8+9										
Pol.	Vertical							Fundamental			
Peak											



Mode	57																																																																																																											
	Harmonic																																																																																																											
	2400-2483.5_802.11be EHT40_CH03_2422MHz																																																																																																											
ANT	8+9																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	Date: 2026-07-22 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4844.00</td><td>45.39</td><td>74.00</td><td>-28.61</td><td>33.54</td><td>32.40</td><td>11.64</td><td>33.55</td><td>1.36</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4844.00	45.39	74.00	-28.61	33.54	32.40	11.64	33.55	1.36	--	Peak	Date: 2026-07-22 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4247.00</td><td>47.76</td><td>74.00</td><td>-26.24</td><td>38.98</td><td>30.31</td><td>10.92</td><td>33.53</td><td>1.08</td><td>100</td><td>360 Peak</td></tr><tr><td>2 4247.00</td><td>37.12</td><td>54.00</td><td>-16.88</td><td>28.34</td><td>30.31</td><td>10.92</td><td>33.53</td><td>1.08</td><td>100</td><td>360 Average</td></tr><tr><td>3 4844.00</td><td>45.31</td><td>74.00</td><td>-28.69</td><td>33.46</td><td>32.40</td><td>11.64</td><td>33.55</td><td>1.36</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4247.00	47.76	74.00	-26.24	38.98	30.31	10.92	33.53	1.08	100	360 Peak	2 4247.00	37.12	54.00	-16.88	28.34	30.31	10.92	33.53	1.08	100	360 Average	3 4844.00	45.31	74.00	-28.69	33.46	32.40	11.64	33.55	1.36	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																		
1 4844.00	45.39	74.00	-28.61	33.54	32.40	11.64	33.55	1.36	--	Peak																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																		
1 4247.00	47.76	74.00	-26.24	38.98	30.31	10.92	33.53	1.08	100	360 Peak																																																																																																		
2 4247.00	37.12	54.00	-16.88	28.34	30.31	10.92	33.53	1.08	100	360 Average																																																																																																		
3 4844.00	45.31	74.00	-28.69	33.46	32.40	11.64	33.55	1.36	--	Peak																																																																																																		



Mode	57	
	Harmonic	
	2400-2483.5_802.11be EHT40_CH03_2422MHz	
ANT	8+9	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-07-22 Frequency (MHz) Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL	Level (dBuV/m) Date: 2026-07-22 Frequency (MHz) Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL



Mode	58																																																																																									
	Band Edge - L																																																																																									
	2400-2483.5_802.11be EHT40_CH06_2437MHz																																																																																									
ANT	8+9																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-07-22 23102335.42360.82386.22411.62437 Frequency (MHz) Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2388.87</td><td>62.33</td><td>74.00 -11.67</td><td>50.38</td><td>26.90</td><td>8.10</td><td>32.58</td><td>9.53</td><td>104</td><td>94 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2388.87	62.33	74.00 -11.67	50.38	26.90	8.10	32.58	9.53	104	94 Peak	Level (dBuV/m) Date: 2026-07-22 10001400.1800.2200.2400.2600.3000 Frequency (MHz) Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2437.00</td><td>112.52</td><td>-----</td><td>100.41</td><td>27.00</td><td>8.19</td><td>32.61</td><td>9.53</td><td>104</td><td>94 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2437.00	112.52	-----	100.41	27.00	8.19	32.61	9.53	104	94 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2388.87	62.33	74.00 -11.67	50.38	26.90	8.10	32.58	9.53	104	94 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2437.00	112.52	-----	100.41	27.00	8.19	32.61	9.53	104	94 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-07-22 23102335.42360.82386.22411.62437 Frequency (MHz) Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.88</td><td>50.00</td><td>54.00 -4.00</td><td>38.05</td><td>26.90</td><td>8.10</td><td>32.58</td><td>9.53</td><td>104</td><td>94 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.88	50.00	54.00 -4.00	38.05	26.90	8.10	32.58	9.53	104	94 Average	Level (dBuV/m) Date: 2026-07-22 10001400.1800.2200.2400.2600.3000 Frequency (MHz) Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2437.00</td><td>103.01</td><td>-----</td><td>90.90</td><td>27.00</td><td>8.19</td><td>32.61</td><td>9.53</td><td>104</td><td>94 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2437.00	103.01	-----	90.90	27.00	8.19	32.61	9.53	104	94 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.88	50.00	54.00 -4.00	38.05	26.90	8.10	32.58	9.53	104	94 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2437.00	103.01	-----	90.90	27.00	8.19	32.61	9.53	104	94 Average																																																																																	



Mode	58																																														
	Band Edge - R																																														
	2400-2483.5_802.11be EHT40_CH06_2437MHz																																														
ANT	8+9																																														
Pol.	Horizontal						Fundamental																																								
Peak	Level (dBuV/m) Date: 2026-07-22 Frequency (MHz) Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.81</td><td>60.22</td><td>74.00</td><td>-13.78</td><td>47.87</td><td>27.16</td><td>8.29</td><td>32.64</td><td>9.54</td><td>104</td><td>94</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.81	60.22	74.00	-13.78	47.87	27.16	8.29	32.64	9.54	104	94	Peak	Blank				
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1 2483.81	60.22	74.00	-13.78	47.87	27.16	8.29	32.64	9.54	104	94	Peak																																				
Avg	Level (dBuV/m) Date: 2026-07-22 Frequency (MHz) Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.56</td><td>48.65</td><td>54.00</td><td>-5.35</td><td>36.30</td><td>27.16</td><td>8.29</td><td>32.64</td><td>9.54</td><td>104</td><td>94</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.56	48.65	54.00	-5.35	36.30	27.16	8.29	32.64	9.54	104	94	Average	Blank				
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1 2483.56	48.65	54.00	-5.35	36.30	27.16	8.29	32.64	9.54	104	94	Average																																				



Mode	58																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_802.11be EHT40_CH06_2437MHz																																																																																																			
ANT	8+9																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-07-22 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.38</td><td>59.78</td><td>74.00</td><td>-14.22</td><td>47.83</td><td>26.90</td><td>8.10</td><td>32.58</td><td>9.53</td><td>100</td><td>120</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.38	59.78	74.00	-14.22	47.83	26.90	8.10	32.58	9.53	100	120	Peak	Level (dBuV/m) Date: 2026-07-22 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>100.35</td><td>-----</td><td>-----</td><td>96.32</td><td>26.94</td><td>8.16</td><td>32.60</td><td>9.53</td><td>100</td><td>120</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	100.35	-----	-----	96.32	26.94	8.16	32.60	9.53	100	120	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.38	59.78	74.00	-14.22	47.83	26.90	8.10	32.58	9.53	100	120	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	100.35	-----	-----	96.32	26.94	8.16	32.60	9.53	100	120	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-07-22 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.88</td><td>46.63</td><td>54.00</td><td>-7.37</td><td>34.68</td><td>26.90</td><td>8.10</td><td>32.58</td><td>9.53</td><td>100</td><td>120</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.88	46.63	54.00	-7.37	34.68	26.90	8.10	32.58	9.53	100	120	Average	Level (dBuV/m) Date: 2026-07-22 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>98.61</td><td>-----</td><td>-----</td><td>86.50</td><td>27.00</td><td>8.19</td><td>32.61</td><td>9.53</td><td>100</td><td>120</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	98.61	-----	-----	86.50	27.00	8.19	32.61	9.53	100	120	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.88	46.63	54.00	-7.37	34.68	26.90	8.10	32.58	9.53	100	120	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	98.61	-----	-----	86.50	27.00	8.19	32.61	9.53	100	120	Average																																																																																								



Mode	58											
	Band Edge - R											
	2400-2483.5_802.11be EHT40_CH06_2437MHz											
ANT	8+9											
Pol.	Vertical						Fundamental					
Peak	<											



Mode	58																																																																																																																																																					
	Harmonic																																																																																																																																																					
	2400-2483.5_802.11be EHT40_CH06_2437MHz																																																																																																																																																					
ANT	8+9																																																																																																																																																					
Pol.	Horizontal					Vertical																																																																																																																																																
Peak Avg	Level (dBuV/m) Date: 2026-07-22 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4874.00</td><td>45.50</td><td>74.00</td><td>-28.50</td><td>33.65</td><td>32.45</td><td>11.66</td><td>33.55</td><td>1.29 -- -- Peak</td></tr><tr><td>2</td><td>7311.00</td><td>49.45</td><td>74.00</td><td>-24.55</td><td>33.09</td><td>37.24</td><td>14.07</td><td>36.03</td><td>1.08 -- -- Peak</td></tr><tr><td>3</td><td>7311.00</td><td>40.28</td><td>54.00</td><td>-13.72</td><td>23.92</td><td>37.24</td><td>14.07</td><td>36.03</td><td>1.08 -- -- Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4874.00	45.50	74.00	-28.50	33.65	32.45	11.66	33.55	1.29 -- -- Peak	2	7311.00	49.45	74.00	-24.55	33.09	37.24	14.07	36.03	1.08 -- -- Peak	3	7311.00	40.28	54.00	-13.72	23.92	37.24	14.07	36.03	1.08 -- -- Average	Level (dBuV/m) Date: 2026-07-22 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4245.00</td><td>46.57</td><td>74.00</td><td>-27.43</td><td>37.79</td><td>30.31</td><td>10.92</td><td>33.53</td><td>1.08 118 0 Peak</td></tr><tr><td>2</td><td>4245.00</td><td>37.04</td><td>54.00</td><td>-16.96</td><td>28.26</td><td>30.31</td><td>10.92</td><td>33.53</td><td>1.08 118 0 Average</td></tr><tr><td>3</td><td>4874.00</td><td>44.97</td><td>74.00</td><td>-29.03</td><td>33.12</td><td>32.45</td><td>11.66</td><td>33.55</td><td>1.29 -- -- Peak</td></tr><tr><td>4</td><td>7311.00</td><td>48.76</td><td>74.00</td><td>-25.24</td><td>32.40</td><td>37.24</td><td>14.07</td><td>36.03</td><td>1.08 -- -- Peak</td></tr><tr><td>5</td><td>7311.00</td><td>39.48</td><td>54.00</td><td>-14.52</td><td>23.12</td><td>37.24</td><td>14.07</td><td>36.03</td><td>1.08 -- -- Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4245.00	46.57	74.00	-27.43	37.79	30.31	10.92	33.53	1.08 118 0 Peak	2	4245.00	37.04	54.00	-16.96	28.26	30.31	10.92	33.53	1.08 118 0 Average	3	4874.00	44.97	74.00	-29.03	33.12	32.45	11.66	33.55	1.29 -- -- Peak	4	7311.00	48.76	74.00	-25.24	32.40	37.24	14.07	36.03	1.08 -- -- Peak	5	7311.00	39.48	54.00	-14.52	23.12	37.24	14.07	36.03	1.08 -- -- Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																													
1	4874.00	45.50	74.00	-28.50	33.65	32.45	11.66	33.55	1.29 -- -- Peak																																																																																																																																													
2	7311.00	49.45	74.00	-24.55	33.09	37.24	14.07	36.03	1.08 -- -- Peak																																																																																																																																													
3	7311.00	40.28	54.00	-13.72	23.92	37.24	14.07	36.03	1.08 -- -- Average																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																													
1	4245.00	46.57	74.00	-27.43	37.79	30.31	10.92	33.53	1.08 118 0 Peak																																																																																																																																													
2	4245.00	37.04	54.00	-16.96	28.26	30.31	10.92	33.53	1.08 118 0 Average																																																																																																																																													
3	4874.00	44.97	74.00	-29.03	33.12	32.45	11.66	33.55	1.29 -- -- Peak																																																																																																																																													
4	7311.00	48.76	74.00	-25.24	32.40	37.24	14.07	36.03	1.08 -- -- Peak																																																																																																																																													
5	7311.00	39.48	54.00	-14.52	23.12	37.24	14.07	36.03	1.08 -- -- Average																																																																																																																																													



Mode	58	
	Harmonic	
	2400-2483.5_802.11be EHT40_CH06_2437MHz	
ANT	8+9	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-07-22 Frequency (MHz) Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL	Level (dBuV/m) Date: 2026-07-22 Frequency (MHz) Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL



Mode	59																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_802.11be EHT40_CH09_2452MHz																																																																																	
ANT	8+9																																																																																	
Pol.	Horizontal					Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2026-07-22 1 Frequency (MHz) Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dB dB/dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2389.66 53.19 74.00 -20.81</td><td>41.24</td><td>26.90</td><td>8.10</td><td>32.58</td><td>9.53</td><td>100</td><td>267</td><td>Peak</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dB dB/dB	dBuV/m	dB/m	dB	dB	dB	cm	deg		1 2389.66 53.19 74.00 -20.81	41.24	26.90	8.10	32.58	9.53	100	267	Peak	Level (dBuV/m) Date: 2026-07-22 1 Frequency (MHz) Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dB dB/dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2452.00 110.04 -----</td><td>97.97</td><td>26.94</td><td>8.21</td><td>32.61</td><td>9.53</td><td>100</td><td>267</td><td>Peak</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dB dB/dB	dBuV/m	dB/m	dB	dB	dB	cm	deg		1 2452.00 110.04 -----	97.97	26.94	8.21	32.61	9.53	100	267	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																		
MHz dBuV/m dB dB/dB	dBuV/m	dB/m	dB	dB	dB	cm	deg																																																																											
1 2389.66 53.19 74.00 -20.81	41.24	26.90	8.10	32.58	9.53	100	267	Peak																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																		
MHz dBuV/m dB dB/dB	dBuV/m	dB/m	dB	dB	dB	cm	deg																																																																											
1 2452.00 110.04 -----	97.97	26.94	8.21	32.61	9.53	100	267	Peak																																																																										
Avg	Level (dBuV/m) Date: 2026-07-22 1 Frequency (MHz) Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dB dB/dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2389.95 42.39 54.00 -11.61</td><td>30.44</td><td>26.90</td><td>8.10</td><td>32.58</td><td>9.53</td><td>100</td><td>267</td><td>Average</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dB dB/dB	dBuV/m	dB/m	dB	dB	dB	cm	deg		1 2389.95 42.39 54.00 -11.61	30.44	26.90	8.10	32.58	9.53	100	267	Average	Level (dBuV/m) Date: 2026-07-22 1 Frequency (MHz) Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dB dB/dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2452.00 100.97 -----</td><td>88.90</td><td>26.94</td><td>8.21</td><td>32.61</td><td>9.53</td><td>100</td><td>267</td><td>Average</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dB dB/dB	dBuV/m	dB/m	dB	dB	dB	cm	deg		1 2452.00 100.97 -----	88.90	26.94	8.21	32.61	9.53	100	267	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																		
MHz dBuV/m dB dB/dB	dBuV/m	dB/m	dB	dB	dB	cm	deg																																																																											
1 2389.95 42.39 54.00 -11.61	30.44	26.90	8.10	32.58	9.53	100	267	Average																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																		
MHz dBuV/m dB dB/dB	dBuV/m	dB/m	dB	dB	dB	cm	deg																																																																											
1 2452.00 100.97 -----	88.90	26.94	8.21	32.61	9.53	100	267	Average																																																																										



Mode	59																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11be EHT40_CH09_2452MHz																																																							
ANT	8+9																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	Level (dBuV/m) Date: 2026-07-22 PEAK_BE_74 24522461.62471.22480.82490.42500 Frequency (MHz) Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.78</td><td>63.79</td><td>74.00</td><td>-10.21</td><td>51.44</td><td>27.16</td><td>8.29</td><td>32.64</td><td>9.54</td><td>100</td><td>267</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.78	63.79	74.00	-10.21	51.44	27.16	8.29	32.64	9.54	100	267	Peak	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.78	63.79	74.00	-10.21	51.44	27.16	8.29	32.64	9.54	100	267	Peak																																												
Avg	Level (dBuV/m) Date: 2026-07-22 AVG_BE_54 24522461.62471.22480.82490.42500 Frequency (MHz) Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.54</td><td>50.76</td><td>54.00</td><td>-3.24</td><td>38.41</td><td>27.16</td><td>8.29</td><td>32.64</td><td>9.54</td><td>100</td><td>267</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.54	50.76	54.00	-3.24	38.41	27.16	8.29	32.64	9.54	100	267	Average	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.54	50.76	54.00	-3.24	38.41	27.16	8.29	32.64	9.54	100	267	Average																																												



Mode	59																																																																																									
	Band Edge - L																																																																																									
	2400-2483.5_802.11be EHT40_CH09_2452MHz																																																																																									
ANT	8+9																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2026-07-22 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2388.10</td><td>52.51</td><td>74.00</td><td>-21.49</td><td>40.56</td><td>26.90</td><td>8.10</td><td>32.58</td><td>9.53</td><td>100</td><td></td><td>0 Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2388.10	52.51	74.00	-21.49	40.56	26.90	8.10	32.58	9.53	100		0 Peak	Level (dBuV/m) Date: 2026-07-22 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2452.00</td><td>107.61</td><td>-----</td><td>-----</td><td>95.53</td><td>27.12</td><td>8.25</td><td>32.63</td><td>9.54</td><td>100</td><td></td><td>0 Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2452.00	107.61	-----	-----	95.53	27.12	8.25	32.63	9.54	100		0 Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2388.10	52.51	74.00	-21.49	40.56	26.90	8.10	32.58	9.53	100		0 Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2452.00	107.61	-----	-----	95.53	27.12	8.25	32.63	9.54	100		0 Peak																																																																														
Avg	Level (dBuV/m) Date: 2026-07-22 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.66</td><td>40.72</td><td>54.00</td><td>-13.28</td><td>28.77</td><td>26.90</td><td>8.10</td><td>32.58</td><td>9.53</td><td>100</td><td></td><td>0 Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.66	40.72	54.00	-13.28	28.77	26.90	8.10	32.58	9.53	100		0 Average	Level (dBuV/m) Date: 2026-07-22 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2452.00</td><td>98.80</td><td>-----</td><td>-----</td><td>86.73</td><td>26.94</td><td>8.21</td><td>32.61</td><td>9.53</td><td>100</td><td></td><td>0 Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2452.00	98.80	-----	-----	86.73	26.94	8.21	32.61	9.53	100		0 Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2389.66	40.72	54.00	-13.28	28.77	26.90	8.10	32.58	9.53	100		0 Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2452.00	98.80	-----	-----	86.73	26.94	8.21	32.61	9.53	100		0 Average																																																																														



Mode	59																																																					
	Band Edge - R																																																					
	2400-2483.5_802.11be EHT40_CH09_2452MHz																																																					
ANT	8+9																																																					
Pol.	Vertical						Fundamental																																															
Peak	Level (dBuV/m) Date: 2026-07-22 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2452 2461.6 2471.2 2480.8 2490.4 2500 Frequency (MHz) PEAK_BE_74 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.35</td><td>59.05</td><td>74.00</td><td>-14.95</td><td>46.70</td><td>27.16</td><td>8.29</td><td>32.64</td><td>9.54</td><td>100</td><td>0 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2484.35	59.05	74.00	-14.95	46.70	27.16	8.29	32.64	9.54	100	0 Peak	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																												
1	2484.35	59.05	74.00	-14.95	46.70	27.16	8.29	32.64	9.54	100	0 Peak																																											
Avg	Level (dBuV/m) Date: 2026-07-22 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2452 2461.6 2471.2 2480.8 2490.4 2500 Frequency (MHz) AVG_BE_54 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.54</td><td>47.17</td><td>54.00</td><td>-6.83</td><td>34.82</td><td>27.16</td><td>8.29</td><td>32.64</td><td>9.54</td><td>100</td><td>0 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	2483.54	47.17	54.00	-6.83	34.82	27.16	8.29	32.64	9.54	100	0 Average	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																												
1	2483.54	47.17	54.00	-6.83	34.82	27.16	8.29	32.64	9.54	100	0 Average																																											







Mode	59																																																																																																																																																					
	Harmonic																																																																																																																																																					
	2400-2483.5_802.11be EHT40_CH09_2452MHz																																																																																																																																																					
ANT	8+9																																																																																																																																																					
Pol.	Horizontal					Vertical																																																																																																																																																
Peak Avg	Level (dBuV/m) Date: 2026-07-22 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) PEAK_74 AVG_54 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4904.00</td><td>46.25</td><td>74.00</td><td>-27.75</td><td>34.38</td><td>32.52</td><td>11.68</td><td>33.55</td><td>1.22</td><td>-- -- Peak</td></tr><tr><td>2 7356.00</td><td>49.77</td><td>74.00</td><td>-24.23</td><td>33.25</td><td>37.39</td><td>14.11</td><td>36.07</td><td>1.09</td><td>-- -- Peak</td></tr><tr><td>3 7356.00</td><td>40.66</td><td>54.00</td><td>-13.34</td><td>24.14</td><td>37.39</td><td>14.11</td><td>36.07</td><td>1.09</td><td>-- -- Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4904.00	46.25	74.00	-27.75	34.38	32.52	11.68	33.55	1.22	-- -- Peak	2 7356.00	49.77	74.00	-24.23	33.25	37.39	14.11	36.07	1.09	-- -- Peak	3 7356.00	40.66	54.00	-13.34	24.14	37.39	14.11	36.07	1.09	-- -- Average	Level (dBuV/m) Date: 2026-07-22 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) PEAK_74 AVG_54 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4245.00</td><td>47.94</td><td>74.00</td><td>-26.06</td><td>39.16</td><td>30.31</td><td>10.92</td><td>33.53</td><td>1.08</td><td>103 0 Peak</td></tr><tr><td>2 4245.00</td><td>37.03</td><td>54.00</td><td>-16.97</td><td>28.25</td><td>30.31</td><td>10.92</td><td>33.53</td><td>1.08</td><td>103 0 Average</td></tr><tr><td>3 4904.00</td><td>45.38</td><td>74.00</td><td>-28.62</td><td>33.51</td><td>32.52</td><td>11.68</td><td>33.55</td><td>1.22</td><td>-- -- Peak</td></tr><tr><td>4 7356.00</td><td>49.24</td><td>74.00</td><td>-24.76</td><td>32.72</td><td>37.39</td><td>14.11</td><td>36.07</td><td>1.09</td><td>-- -- Peak</td></tr><tr><td>5 7356.00</td><td>39.81</td><td>54.00</td><td>-14.19</td><td>23.29</td><td>37.39</td><td>14.11</td><td>36.07</td><td>1.09</td><td>-- -- Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4245.00	47.94	74.00	-26.06	39.16	30.31	10.92	33.53	1.08	103 0 Peak	2 4245.00	37.03	54.00	-16.97	28.25	30.31	10.92	33.53	1.08	103 0 Average	3 4904.00	45.38	74.00	-28.62	33.51	32.52	11.68	33.55	1.22	-- -- Peak	4 7356.00	49.24	74.00	-24.76	32.72	37.39	14.11	36.07	1.09	-- -- Peak	5 7356.00	39.81	54.00	-14.19	23.29	37.39	14.11	36.07	1.09	-- -- Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																													
1 4904.00	46.25	74.00	-27.75	34.38	32.52	11.68	33.55	1.22	-- -- Peak																																																																																																																																													
2 7356.00	49.77	74.00	-24.23	33.25	37.39	14.11	36.07	1.09	-- -- Peak																																																																																																																																													
3 7356.00	40.66	54.00	-13.34	24.14	37.39	14.11	36.07	1.09	-- -- Average																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																													
1 4245.00	47.94	74.00	-26.06	39.16	30.31	10.92	33.53	1.08	103 0 Peak																																																																																																																																													
2 4245.00	37.03	54.00	-16.97	28.25	30.31	10.92	33.53	1.08	103 0 Average																																																																																																																																													
3 4904.00	45.38	74.00	-28.62	33.51	32.52	11.68	33.55	1.22	-- -- Peak																																																																																																																																													
4 7356.00	49.24	74.00	-24.76	32.72	37.39	14.11	36.07	1.09	-- -- Peak																																																																																																																																													
5 7356.00	39.81	54.00	-14.19	23.29	37.39	14.11	36.07	1.09	-- -- Average																																																																																																																																													



Mode	59	
	Harmonic	
	2400-2483.5_802.11be EHT40_CH09_2452MHz	
ANT	8+9	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-07-22 Frequency (MHz) Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL	Level (dBuV/m) Date: 2026-07-22 Frequency (MHz) Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL

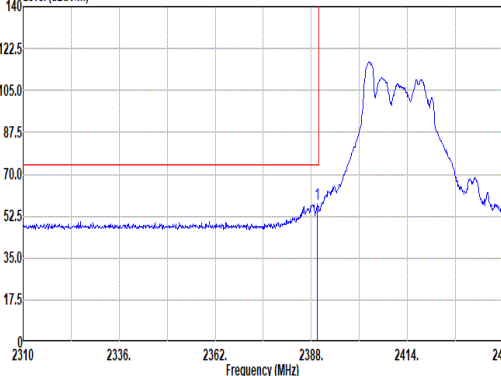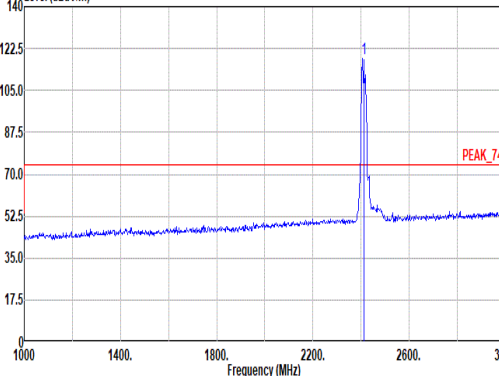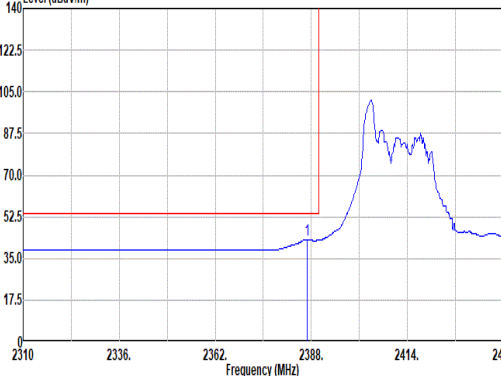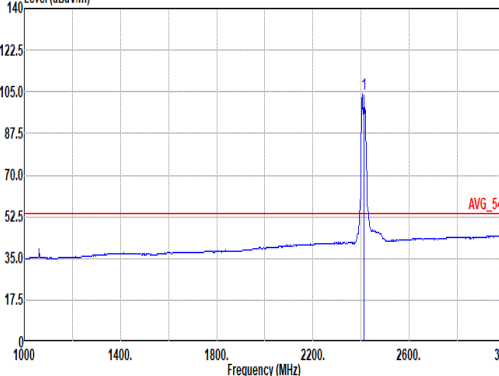

Mode	60																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11be EHT20_CH01_Partial RU_26/0_2412MHz																																																																																																	
ANT	8+9																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak	Level (dBuV/m) Date: 2026-07-27  Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.69</td><td>57.58</td><td>74.00</td><td>-16.42</td><td>45.63</td><td>26.90</td><td>8.10</td><td>32.58</td><td>9.53</td><td>100</td><td>59</td><td>Peak</td></tr></tbody></table> Level (dBuV/m) Date: 2026-07-27  Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>118.44</td><td>-----</td><td>-----</td><td>106.48</td><td>26.90</td><td>8.12</td><td>32.59</td><td>9.53</td><td>100</td><td>59</td><td>Peak</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2389.69	57.58	74.00	-16.42	45.63	26.90	8.10	32.58	9.53	100	59	Peak		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2412.00	118.44	-----	-----	106.48	26.90	8.12	32.59	9.53	100	59	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2389.69	57.58	74.00	-16.42	45.63	26.90	8.10	32.58	9.53	100	59	Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	118.44	-----	-----	106.48	26.90	8.12	32.59	9.53	100	59	Peak																																																																																						
Avg	Level (dBuV/m) Date: 2026-07-27  Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2386.96</td><td>42.91</td><td>54.00</td><td>-11.09</td><td>30.98</td><td>26.90</td><td>8.09</td><td>32.58</td><td>9.52</td><td>100</td><td>59</td><td>Average</td></tr></tbody></table> Level (dBuV/m) Date: 2026-07-27  Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>104.28</td><td>-----</td><td>-----</td><td>92.32</td><td>26.90</td><td>8.12</td><td>32.59</td><td>9.53</td><td>100</td><td>59</td><td>Average</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2386.96	42.91	54.00	-11.09	30.98	26.90	8.09	32.58	9.52	100	59	Average		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2412.00	104.28	-----	-----	92.32	26.90	8.12	32.59	9.53	100	59	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2386.96	42.91	54.00	-11.09	30.98	26.90	8.09	32.58	9.52	100	59	Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	104.28	-----	-----	92.32	26.90	8.12	32.59	9.53	100	59	Average																																																																																						



Mode	60																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11be EHT20_CH01_Partial RU_26/0_2412MHz																																																																																									
ANT	8+9																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2388.39</td><td>56.26</td><td>74.00 -17.74</td><td>44.31</td><td>26.90</td><td>8.10</td><td>32.58</td><td>9.53</td><td>100</td><td>118 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2388.39	56.26	74.00 -17.74	44.31	26.90	8.10	32.58	9.53	100	118 Peak	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2412.00</td><td>116.50</td><td>-----</td><td>104.54</td><td>26.90</td><td>8.12</td><td>32.59</td><td>9.53</td><td>100</td><td>118 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	116.50	-----	104.54	26.90	8.12	32.59	9.53	100	118 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2388.39	56.26	74.00 -17.74	44.31	26.90	8.10	32.58	9.53	100	118 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	116.50	-----	104.54	26.90	8.12	32.59	9.53	100	118 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2386.18</td><td>42.54</td><td>54.00 -11.46</td><td>30.60</td><td>26.90</td><td>8.09</td><td>32.57</td><td>9.52</td><td>100</td><td>118 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2386.18	42.54	54.00 -11.46	30.60	26.90	8.09	32.57	9.52	100	118 Average	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2412.00</td><td>107.37</td><td>-----</td><td>95.41</td><td>26.90</td><td>8.12</td><td>32.59</td><td>9.53</td><td>100</td><td>118 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	107.37	-----	95.41	26.90	8.12	32.59	9.53	100	118 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2386.18	42.54	54.00 -11.46	30.60	26.90	8.09	32.57	9.52	100	118 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	107.37	-----	95.41	26.90	8.12	32.59	9.53	100	118 Average																																																																																	



Mode	61																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11be EHT20_CH01_Partial RU_52/37_2412MHz																																																																																																			
ANT	8+9																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-07-28 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.43</td><td>54.40</td><td>74.00</td><td>-19.60</td><td>42.45</td><td>26.90</td><td>8.10</td><td>32.58</td><td>9.53</td><td>100</td><td>259</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.43	54.40	74.00	-19.60	42.45	26.90	8.10	32.58	9.53	100	259	Peak	Level (dBuV/m) Date: 2026-07-28 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>117.05</td><td>-----</td><td>-----</td><td>105.09</td><td>26.90</td><td>8.12</td><td>32.59</td><td>9.53</td><td>100</td><td>259</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	117.05	-----	-----	105.09	26.90	8.12	32.59	9.53	100	259	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.43	54.40	74.00	-19.60	42.45	26.90	8.10	32.58	9.53	100	259	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	117.05	-----	-----	105.09	26.90	8.12	32.59	9.53	100	259	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-07-28 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>42.03</td><td>54.00</td><td>-11.97</td><td>30.08</td><td>26.90</td><td>8.10</td><td>32.58</td><td>9.53</td><td>100</td><td>259</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	42.03	54.00	-11.97	30.08	26.90	8.10	32.58	9.53	100	259	Average	Level (dBuV/m) Date: 2026-07-28 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>109.37</td><td>-----</td><td>-----</td><td>97.41</td><td>26.90</td><td>8.12</td><td>32.59</td><td>9.53</td><td>100</td><td>259</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	109.37	-----	-----	97.41	26.90	8.12	32.59	9.53	100	259	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.69	42.03	54.00	-11.97	30.08	26.90	8.10	32.58	9.53	100	259	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	109.37	-----	-----	97.41	26.90	8.12	32.59	9.53	100	259	Average																																																																																								



Mode	61											
	Band Edge											
	2400-2483.5_802.11be EHT20_CH01_Partial RU_52/37_2412MHz											
ANT	8+9											
Pol.	Vertical						Fundamental					
Peak	Level (dBuV/m)											



Mode	62																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11be EHT20_CH01_Partial RU_106/53_2412MHz																																																																																									
ANT	8+9																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-07-28 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.30</td><td>59.98</td><td>74.00 -14.02</td><td>48.03</td><td>26.90</td><td>8.10</td><td>32.58</td><td>9.53</td><td>100</td><td>60 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.30	59.98	74.00 -14.02	48.03	26.90	8.10	32.58	9.53	100	60 Peak	Level (dBuV/m) Date: 2026-07-28 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2412.00</td><td>115.61</td><td>-----</td><td>103.64</td><td>26.90</td><td>8.13</td><td>32.59</td><td>9.53</td><td>100</td><td>60 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	115.61	-----	103.64	26.90	8.13	32.59	9.53	100	60 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.30	59.98	74.00 -14.02	48.03	26.90	8.10	32.58	9.53	100	60 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	115.61	-----	103.64	26.90	8.13	32.59	9.53	100	60 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-07-28 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:0.033kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.95</td><td>43.54</td><td>54.00 -10.46</td><td>31.59</td><td>26.90</td><td>8.10</td><td>32.58</td><td>9.53</td><td>100</td><td>60 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.95	43.54	54.00 -10.46	31.59	26.90	8.10	32.58	9.53	100	60 Average	Level (dBuV/m) Date: 2026-07-28 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:0.033kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2412.00</td><td>107.87</td><td>-----</td><td>95.90</td><td>26.90</td><td>8.13</td><td>32.59</td><td>9.53</td><td>100</td><td>60 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	107.87	-----	95.90	26.90	8.13	32.59	9.53	100	60 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.95	43.54	54.00 -10.46	31.59	26.90	8.10	32.58	9.53	100	60 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	107.87	-----	95.90	26.90	8.13	32.59	9.53	100	60 Average																																																																																	



Mode	62																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11be EHT20_CH01_Partial RU_106/53_2412MHz																																																																																																			
ANT	8+9																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-07-28 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.30</td><td>56.99</td><td>74.00</td><td>-17.01</td><td>45.04</td><td>26.90</td><td>8.10</td><td>32.58</td><td>9.53</td><td>108</td><td>110</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.30	56.99	74.00	-17.01	45.04	26.90	8.10	32.58	9.53	108	110	Peak	Level (dBuV/m) Date: 2026-07-28 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>110.19</td><td>-----</td><td>-----</td><td>90.23</td><td>26.90</td><td>8.12</td><td>32.59</td><td>9.53</td><td>108</td><td>110</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	110.19	-----	-----	90.23	26.90	8.12	32.59	9.53	108	110	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.30	56.99	74.00	-17.01	45.04	26.90	8.10	32.58	9.53	108	110	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	110.19	-----	-----	90.23	26.90	8.12	32.59	9.53	108	110	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-07-28 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:0.033kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>42.14</td><td>54.00</td><td>-11.86</td><td>30.19</td><td>26.90</td><td>8.10</td><td>32.58</td><td>9.53</td><td>108</td><td>110</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	42.14	54.00	-11.86	30.19	26.90	8.10	32.58	9.53	108	110	Average	Level (dBuV/m) Date: 2026-07-28 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:0.033kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>102.18</td><td>-----</td><td>-----</td><td>90.21</td><td>26.90</td><td>8.13</td><td>32.59</td><td>9.53</td><td>108</td><td>110</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	102.18	-----	-----	90.21	26.90	8.13	32.59	9.53	108	110	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.69	42.14	54.00	-11.86	30.19	26.90	8.10	32.58	9.53	108	110	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	102.18	-----	-----	90.21	26.90	8.13	32.59	9.53	108	110	Average																																																																																								



Mode	63																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11be EHT20_CH11_Partial RU_26/8_2462MHz																																																																																									
ANT	8+9																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>2483.55</td><td>61.60</td><td>74.00</td><td>-12.40</td><td>49.25</td><td>27.16</td><td>8.29</td><td>32.64</td><td>9.54 100 63 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg	1	2483.55	61.60	74.00	-12.40	49.25	27.16	8.29	32.64	9.54 100 63 Peak	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>2462.00</td><td>118.00</td><td>-----</td><td>-----</td><td>105.63</td><td>27.20</td><td>8.26</td><td>32.63</td><td>9.54 100 63 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg	1	2462.00	118.00	-----	-----	105.63	27.20	8.26	32.63	9.54 100 63 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg																																																																																	
1	2483.55	61.60	74.00	-12.40	49.25	27.16	8.29	32.64	9.54 100 63 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg																																																																																	
1	2462.00	118.00	-----	-----	105.63	27.20	8.26	32.63	9.54 100 63 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>2483.51</td><td>44.02</td><td>54.00</td><td>-9.98</td><td>31.67</td><td>27.16</td><td>8.29</td><td>32.64</td><td>9.54 100 63 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg	1	2483.51	44.02	54.00	-9.98	31.67	27.16	8.29	32.64	9.54 100 63 Average	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>2462.00</td><td>110.60</td><td>-----</td><td>-----</td><td>98.23</td><td>27.20</td><td>8.26</td><td>32.63</td><td>9.54 100 63 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg	1	2462.00	110.60	-----	-----	98.23	27.20	8.26	32.63	9.54 100 63 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg																																																																																	
1	2483.51	44.02	54.00	-9.98	31.67	27.16	8.29	32.64	9.54 100 63 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg																																																																																	
1	2462.00	110.60	-----	-----	98.23	27.20	8.26	32.63	9.54 100 63 Average																																																																																	



Mode	63																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11be EHT20_CH11_Partial RU_26/8_2462MHz																																																																																																			
ANT	8+9																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>57.95</td><td>74.00</td><td>-16.05</td><td>45.60</td><td>27.16</td><td>8.29</td><td>32.64</td><td>9.54</td><td>373</td><td>119</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	57.95	74.00	-16.05	45.60	27.16	8.29	32.64	9.54	373	119	Peak	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>117.44</td><td>-----</td><td>-----</td><td>105.07</td><td>27.20</td><td>8.26</td><td>32.63</td><td>9.54</td><td>373</td><td>119</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	117.44	-----	-----	105.07	27.20	8.26	32.63	9.54	373	119	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.51	57.95	74.00	-16.05	45.60	27.16	8.29	32.64	9.54	373	119	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	117.44	-----	-----	105.07	27.20	8.26	32.63	9.54	373	119	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>42.39</td><td>54.00</td><td>-11.61</td><td>30.04</td><td>27.16</td><td>8.29</td><td>32.64</td><td>9.54</td><td>373</td><td>119</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	42.39	54.00	-11.61	30.04	27.16	8.29	32.64	9.54	373	119	Average	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>110.62</td><td>-----</td><td>-----</td><td>98.25</td><td>27.20</td><td>8.26</td><td>32.63</td><td>9.54</td><td>373</td><td>119</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	110.62	-----	-----	98.25	27.20	8.26	32.63	9.54	373	119	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.51	42.39	54.00	-11.61	30.04	27.16	8.29	32.64	9.54	373	119	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	110.62	-----	-----	98.25	27.20	8.26	32.63	9.54	373	119	Average																																																																																								



Mode	64																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11be EHT20_CH11_Partial RU_52/40_2462MHz																																																																																									
ANT	8+9																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>2484.12</td><td>57.48</td><td>74.00</td><td>-16.52</td><td>45.13</td><td>27.16</td><td>8.29</td><td>32.64</td><td>9.54 100 67 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg	1	2484.12	57.48	74.00	-16.52	45.13	27.16	8.29	32.64	9.54 100 67 Peak	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>2462.00</td><td>118.23</td><td>-----</td><td>-----</td><td>105.86</td><td>27.20</td><td>8.26</td><td>32.63</td><td>9.54 100 67 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg	1	2462.00	118.23	-----	-----	105.86	27.20	8.26	32.63	9.54 100 67 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg																																																																																	
1	2484.12	57.48	74.00	-16.52	45.13	27.16	8.29	32.64	9.54 100 67 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg																																																																																	
1	2462.00	118.23	-----	-----	105.86	27.20	8.26	32.63	9.54 100 67 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>2483.51</td><td>44.68</td><td>54.00</td><td>-9.32</td><td>32.33</td><td>27.16</td><td>8.29</td><td>32.64</td><td>9.54 100 67 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg	1	2483.51	44.68	54.00	-9.32	32.33	27.16	8.29	32.64	9.54 100 67 Average	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>2462.00</td><td>109.86</td><td>-----</td><td>-----</td><td>97.54</td><td>27.16</td><td>8.25</td><td>32.63</td><td>9.54 100 67 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg	1	2462.00	109.86	-----	-----	97.54	27.16	8.25	32.63	9.54 100 67 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg																																																																																	
1	2483.51	44.68	54.00	-9.32	32.33	27.16	8.29	32.64	9.54 100 67 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm deg																																																																																	
1	2462.00	109.86	-----	-----	97.54	27.16	8.25	32.63	9.54 100 67 Average																																																																																	



Mode	64																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11be EHT20_CH11_Partial RU_52/40_2462MHz																																																																																									
ANT	8+9																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2483.55</td><td>57.62</td><td>74.00</td><td>-16.38</td><td>45.27</td><td>27.16</td><td>8.29</td><td>32.64</td><td>9.54</td><td>376 116 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2483.55	57.62	74.00	-16.38	45.27	27.16	8.29	32.64	9.54	376 116 Peak	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2462.00</td><td>117.64</td><td>-----</td><td>-----</td><td>105.27</td><td>27.20</td><td>8.26</td><td>32.63</td><td>9.54</td><td>376 116 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2462.00	117.64	-----	-----	105.27	27.20	8.26	32.63	9.54	376 116 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 2483.55	57.62	74.00	-16.38	45.27	27.16	8.29	32.64	9.54	376 116 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 2462.00	117.64	-----	-----	105.27	27.20	8.26	32.63	9.54	376 116 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2483.51</td><td>42.97</td><td>54.00</td><td>-11.03</td><td>30.62</td><td>27.16</td><td>8.29</td><td>32.64</td><td>9.54</td><td>376 116 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2483.51	42.97	54.00	-11.03	30.62	27.16	8.29	32.64	9.54	376 116 Average	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2462.00</td><td>109.02</td><td>-----</td><td>-----</td><td>96.65</td><td>27.20</td><td>8.26</td><td>32.63</td><td>9.54</td><td>376 116 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2462.00	109.02	-----	-----	96.65	27.20	8.26	32.63	9.54	376 116 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 2483.51	42.97	54.00	-11.03	30.62	27.16	8.29	32.64	9.54	376 116 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 2462.00	109.02	-----	-----	96.65	27.20	8.26	32.63	9.54	376 116 Average																																																																																	





Mode	65																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11be EHT20_CH11_Partial RU_106/54_2462MHz																																																																																									
ANT	8+9																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2484.23</td><td>57.64</td><td>74.00</td><td>-16.36</td><td>45.29</td><td>27.16</td><td>8.29</td><td>32.64</td><td>9.54</td><td>121 68 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm deg	1 2484.23	57.64	74.00	-16.36	45.29	27.16	8.29	32.64	9.54	121 68 Peak	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2462.00</td><td>118.28</td><td>-----</td><td>-----</td><td>106.05</td><td>27.08</td><td>8.24</td><td>32.63</td><td>9.54</td><td>121 68 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm deg	1 2462.00	118.28	-----	-----	106.05	27.08	8.24	32.63	9.54	121 68 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm deg																																																																																	
1 2484.23	57.64	74.00	-16.36	45.29	27.16	8.29	32.64	9.54	121 68 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm deg																																																																																	
1 2462.00	118.28	-----	-----	106.05	27.08	8.24	32.63	9.54	121 68 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:0.033kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2483.51</td><td>44.96</td><td>54.00</td><td>-9.04</td><td>32.61</td><td>27.16</td><td>8.29</td><td>32.64</td><td>9.54</td><td>121 68 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm deg	1 2483.51	44.96	54.00	-9.04	32.61	27.16	8.29	32.64	9.54	121 68 Average	Level (dBuV/m) Date: 2026-07-27 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 HORIZONTAL : RBW:1000.000kHz VBW:0.033kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2462.00</td><td>187.93</td><td>-----</td><td>-----</td><td>95.70</td><td>27.08</td><td>8.24</td><td>32.63</td><td>9.54</td><td>121 68 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm deg	1 2462.00	187.93	-----	-----	95.70	27.08	8.24	32.63	9.54	121 68 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm deg																																																																																	
1 2483.51	44.96	54.00	-9.04	32.61	27.16	8.29	32.64	9.54	121 68 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm deg																																																																																	
1 2462.00	187.93	-----	-----	95.70	27.08	8.24	32.63	9.54	121 68 Average																																																																																	



Mode	65																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11be EHT20_CH11_Partial RU_106/54_2462MHz																																																																																									
ANT	8+9																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-07-27 PEAK_BE_74 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.93</td><td>55.08</td><td>74.00 -18.92</td><td>42.73</td><td>27.16</td><td>8.29</td><td>32.64</td><td>9.54</td><td>377</td><td>118 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.93	55.08	74.00 -18.92	42.73	27.16	8.29	32.64	9.54	377	118 Peak	Level (dBuV/m) Date: 2026-07-27 PEAK_74 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>114.14</td><td>-----</td><td>101.77</td><td>27.20</td><td>8.26</td><td>32.63</td><td>9.54</td><td>377</td><td>118 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2462.00	114.14	-----	101.77	27.20	8.26	32.63	9.54	377	118 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2483.93	55.08	74.00 -18.92	42.73	27.16	8.29	32.64	9.54	377	118 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2462.00	114.14	-----	101.77	27.20	8.26	32.63	9.54	377	118 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-07-27 AVG_BE_54 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:0.033kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.51</td><td>43.13</td><td>54.00 -10.87</td><td>30.78</td><td>27.16</td><td>8.29</td><td>32.64</td><td>9.54</td><td>377</td><td>118 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.51	43.13	54.00 -10.87	30.78	27.16	8.29	32.64	9.54	377	118 Average	Level (dBuV/m) Date: 2026-07-27 AVG_54 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_260520 VERTICAL : RBW:1000.000kHz VBW:0.033kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>104.58</td><td>-----</td><td>92.26</td><td>27.16</td><td>8.25</td><td>32.63</td><td>9.54</td><td>377</td><td>118 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2462.00	104.58	-----	92.26	27.16	8.25	32.63	9.54	377	118 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2483.51	43.13	54.00 -10.87	30.78	27.16	8.29	32.64	9.54	377	118 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2462.00	104.58	-----	92.26	27.16	8.25	32.63	9.54	377	118 Average																																																																																	

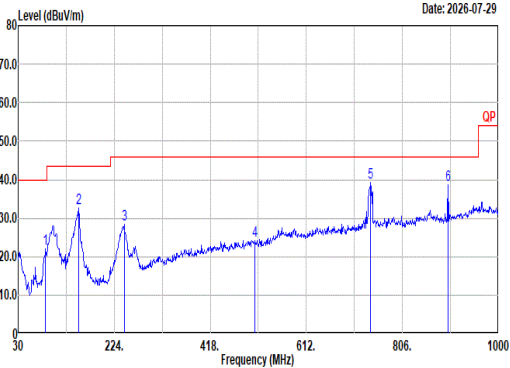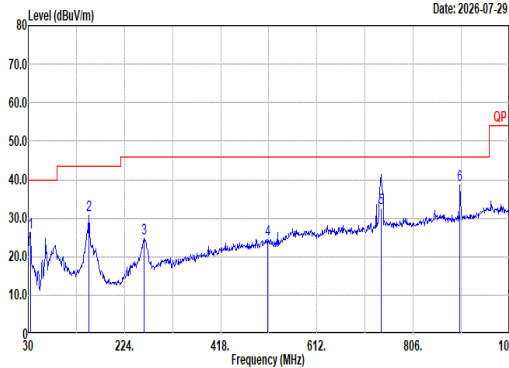

Mode	68																																																																																																																																																																																												
	LF																																																																																																																																																																																												
	2400-2483.5_802.11be EHT40_CH03_2422MHz																																																																																																																																																																																												
ANT	8+9																																																																																																																																																																																												
Pol.	Horizontal					Vertical																																																																																																																																																																																							
QP/ Peak																																																																																																																																																																																													
	Site : 03CH22-HY Condition: QP 3m Bilog_63304_251126 HORIZONTAL					Site : 03CH22-HY Condition: QP 3m Bilog_63304_251126 VERTICAL																																																																																																																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>85.29</td><td>22.00</td><td>40.00</td><td>-18.00</td><td>38.90</td><td>14.00</td><td>1.48</td><td>32.62</td><td>0.16 -- -- Peak</td></tr><tr><td>2</td><td>152.22</td><td>32.64</td><td>43.50</td><td>-10.86</td><td>46.04</td><td>17.01</td><td>2.02</td><td>32.61</td><td>0.18 -- -- Peak</td></tr><tr><td>3</td><td>244.37</td><td>28.44</td><td>46.00</td><td>-17.56</td><td>40.61</td><td>17.71</td><td>2.57</td><td>32.60</td><td>0.15 -- -- Peak</td></tr><tr><td>4</td><td>508.21</td><td>24.07</td><td>46.00</td><td>-21.93</td><td>28.73</td><td>24.12</td><td>3.71</td><td>32.75</td><td>0.26 -- -- Peak</td></tr><tr><td>5</td><td>741.98</td><td>39.34</td><td>46.00</td><td>-6.66</td><td>39.24</td><td>27.91</td><td>4.49</td><td>32.56</td><td>0.26 -- -- Peak</td></tr><tr><td>6</td><td>898.15</td><td>38.65</td><td>46.00</td><td>-7.35</td><td>36.35</td><td>28.85</td><td>4.94</td><td>31.72</td><td>0.23 -- -- Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	85.29	22.00	40.00	-18.00	38.90	14.00	1.48	32.62	0.16 -- -- Peak	2	152.22	32.64	43.50	-10.86	46.04	17.01	2.02	32.61	0.18 -- -- Peak	3	244.37	28.44	46.00	-17.56	40.61	17.71	2.57	32.60	0.15 -- -- Peak	4	508.21	24.07	46.00	-21.93	28.73	24.12	3.71	32.75	0.26 -- -- Peak	5	741.98	39.34	46.00	-6.66	39.24	27.91	4.49	32.56	0.26 -- -- Peak	6	898.15	38.65	46.00	-7.35	36.35	28.85	4.94	31.72	0.23 -- -- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>34.85</td><td>26.26</td><td>40.00</td><td>-13.74</td><td>36.02</td><td>21.74</td><td>0.93</td><td>32.61</td><td>0.18 -- -- Peak</td></tr><tr><td>2</td><td>152.22</td><td>30.86</td><td>43.50</td><td>-12.64</td><td>44.26</td><td>17.01</td><td>2.02</td><td>32.61</td><td>0.18 -- -- Peak</td></tr><tr><td>3</td><td>262.80</td><td>24.76</td><td>46.00</td><td>-21.24</td><td>34.46</td><td>20.09</td><td>2.67</td><td>32.61</td><td>0.15 -- -- Peak</td></tr><tr><td>4</td><td>512.09</td><td>24.43</td><td>46.00</td><td>-21.57</td><td>29.08</td><td>24.10</td><td>3.73</td><td>32.75</td><td>0.27 -- -- Peak</td></tr><tr><td>5</td><td>741.01</td><td>32.63</td><td>46.00</td><td>-13.37</td><td>32.52</td><td>27.93</td><td>4.49</td><td>32.56</td><td>0.25 138 166 QP</td></tr><tr><td>6</td><td>900.09</td><td>38.61</td><td>46.00</td><td>-7.39</td><td>36.21</td><td>28.94</td><td>4.94</td><td>31.71</td><td>0.23 -- -- Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	34.85	26.26	40.00	-13.74	36.02	21.74	0.93	32.61	0.18 -- -- Peak	2	152.22	30.86	43.50	-12.64	44.26	17.01	2.02	32.61	0.18 -- -- Peak	3	262.80	24.76	46.00	-21.24	34.46	20.09	2.67	32.61	0.15 -- -- Peak	4	512.09	24.43	46.00	-21.57	29.08	24.10	3.73	32.75	0.27 -- -- Peak	5	741.01	32.63	46.00	-13.37	32.52	27.93	4.49	32.56	0.25 138 166 QP	6	900.09	38.61	46.00	-7.39	36.21	28.94	4.94	31.71
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																																				
1	85.29	22.00	40.00	-18.00	38.90	14.00	1.48	32.62	0.16 -- -- Peak																																																																																																																																																																																				
2	152.22	32.64	43.50	-10.86	46.04	17.01	2.02	32.61	0.18 -- -- Peak																																																																																																																																																																																				
3	244.37	28.44	46.00	-17.56	40.61	17.71	2.57	32.60	0.15 -- -- Peak																																																																																																																																																																																				
4	508.21	24.07	46.00	-21.93	28.73	24.12	3.71	32.75	0.26 -- -- Peak																																																																																																																																																																																				
5	741.98	39.34	46.00	-6.66	39.24	27.91	4.49	32.56	0.26 -- -- Peak																																																																																																																																																																																				
6	898.15	38.65	46.00	-7.35	36.35	28.85	4.94	31.72	0.23 -- -- Peak																																																																																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																																				
1	34.85	26.26	40.00	-13.74	36.02	21.74	0.93	32.61	0.18 -- -- Peak																																																																																																																																																																																				
2	152.22	30.86	43.50	-12.64	44.26	17.01	2.02	32.61	0.18 -- -- Peak																																																																																																																																																																																				
3	262.80	24.76	46.00	-21.24	34.46	20.09	2.67	32.61	0.15 -- -- Peak																																																																																																																																																																																				
4	512.09	24.43	46.00	-21.57	29.08	24.10	3.73	32.75	0.27 -- -- Peak																																																																																																																																																																																				
5	741.01	32.63	46.00	-13.37	32.52	27.93	4.49	32.56	0.25 138 166 QP																																																																																																																																																																																				
6	900.09	38.61	46.00	-7.39	36.21	28.94	4.94	31.71	0.23 -- -- Peak																																																																																																																																																																																				




Mode	69																																																																																																	
	SHF																																																																																																	
	2400-2483.5_802.11be EHT40_CH03_2422MHz																																																																																																	
ANT	8+9																																																																																																	
Pol.	Horizontal						Vertical																																																																																											
Peak	Date: 2026-07-28 Site : 03CH22-HY Condition: PEAK_74 1m SHF_00994_268123 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>23636.21</td><td>39.70</td><td>74.00</td><td>-34.30</td><td>45.18</td><td>39.20</td><td>25.93</td><td>61.07</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	23636.21	39.70	74.00	-34.30	45.18	39.20	25.93	61.07	-9.54	--	--	PEAK	Date: 2026-07-28 Site : 03CH22-HY Condition: PEAK_74 1m SHF_00994_268123 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>24850.63</td><td>39.35</td><td>74.00</td><td>-34.65</td><td>43.64</td><td>39.70</td><td>26.50</td><td>60.95</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	24850.63	39.35	74.00	-34.65	43.64	39.70	26.50	60.95	-9.54	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	23636.21	39.70	74.00	-34.30	45.18	39.20	25.93	61.07	-9.54	--	--	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	24850.63	39.35	74.00	-34.65	43.64	39.70	26.50	60.95	-9.54	--	--	PEAK																																																																																						




Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting
8+9	802.11b	100.00	-	-	10Hz
8+9	802.11g	98.87	-	-	10Hz
8+9	802.11be EHT20	99.52	-	-	10Hz
8+9	802.11be EHT40	100.00	-	-	10Hz
8+9	802.11be EHT20 RU_26	98.10	-	-	10Hz
8+9	802.11be EHT20 RU_52	98.03	-	-	10Hz
8+9	802.11be EHT20 RU_160	97.97	32850	0.03	33Hz

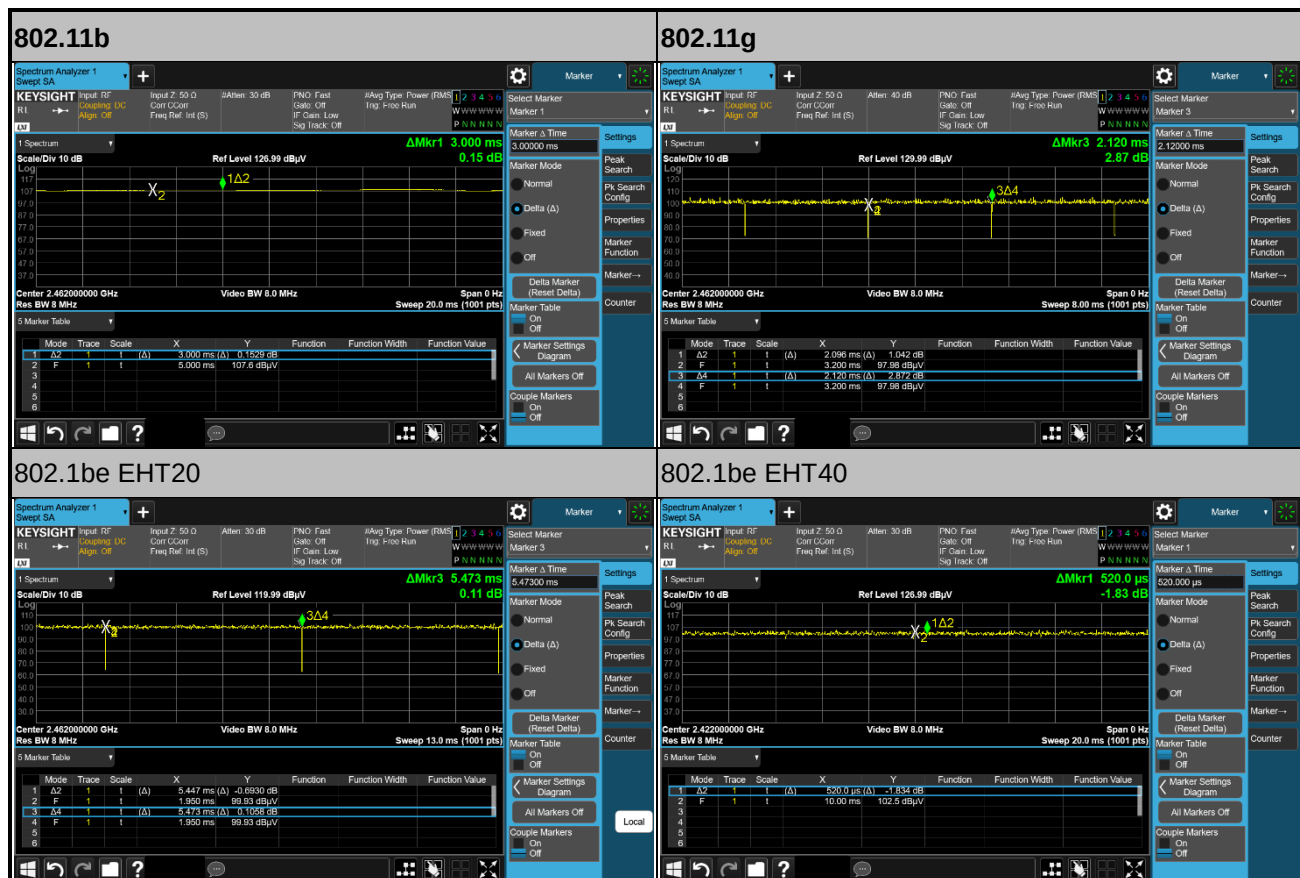




802.1be EHT20 RU_26

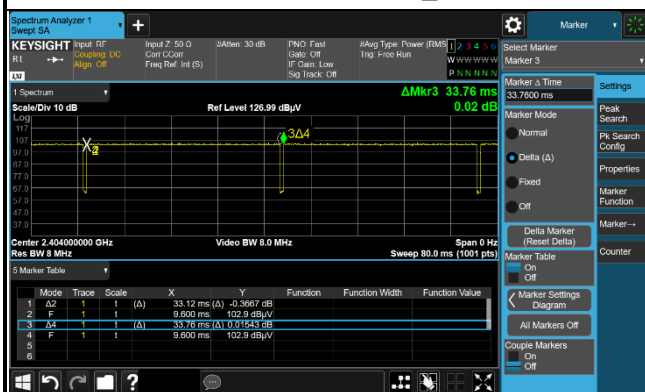

802.1be EHT20 RU_52

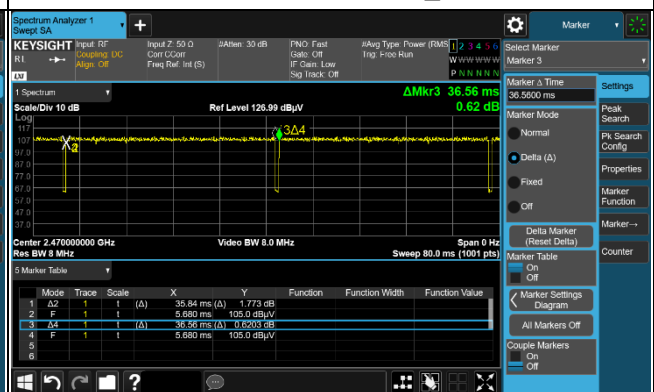

802.1be EHT20 RU_106

