


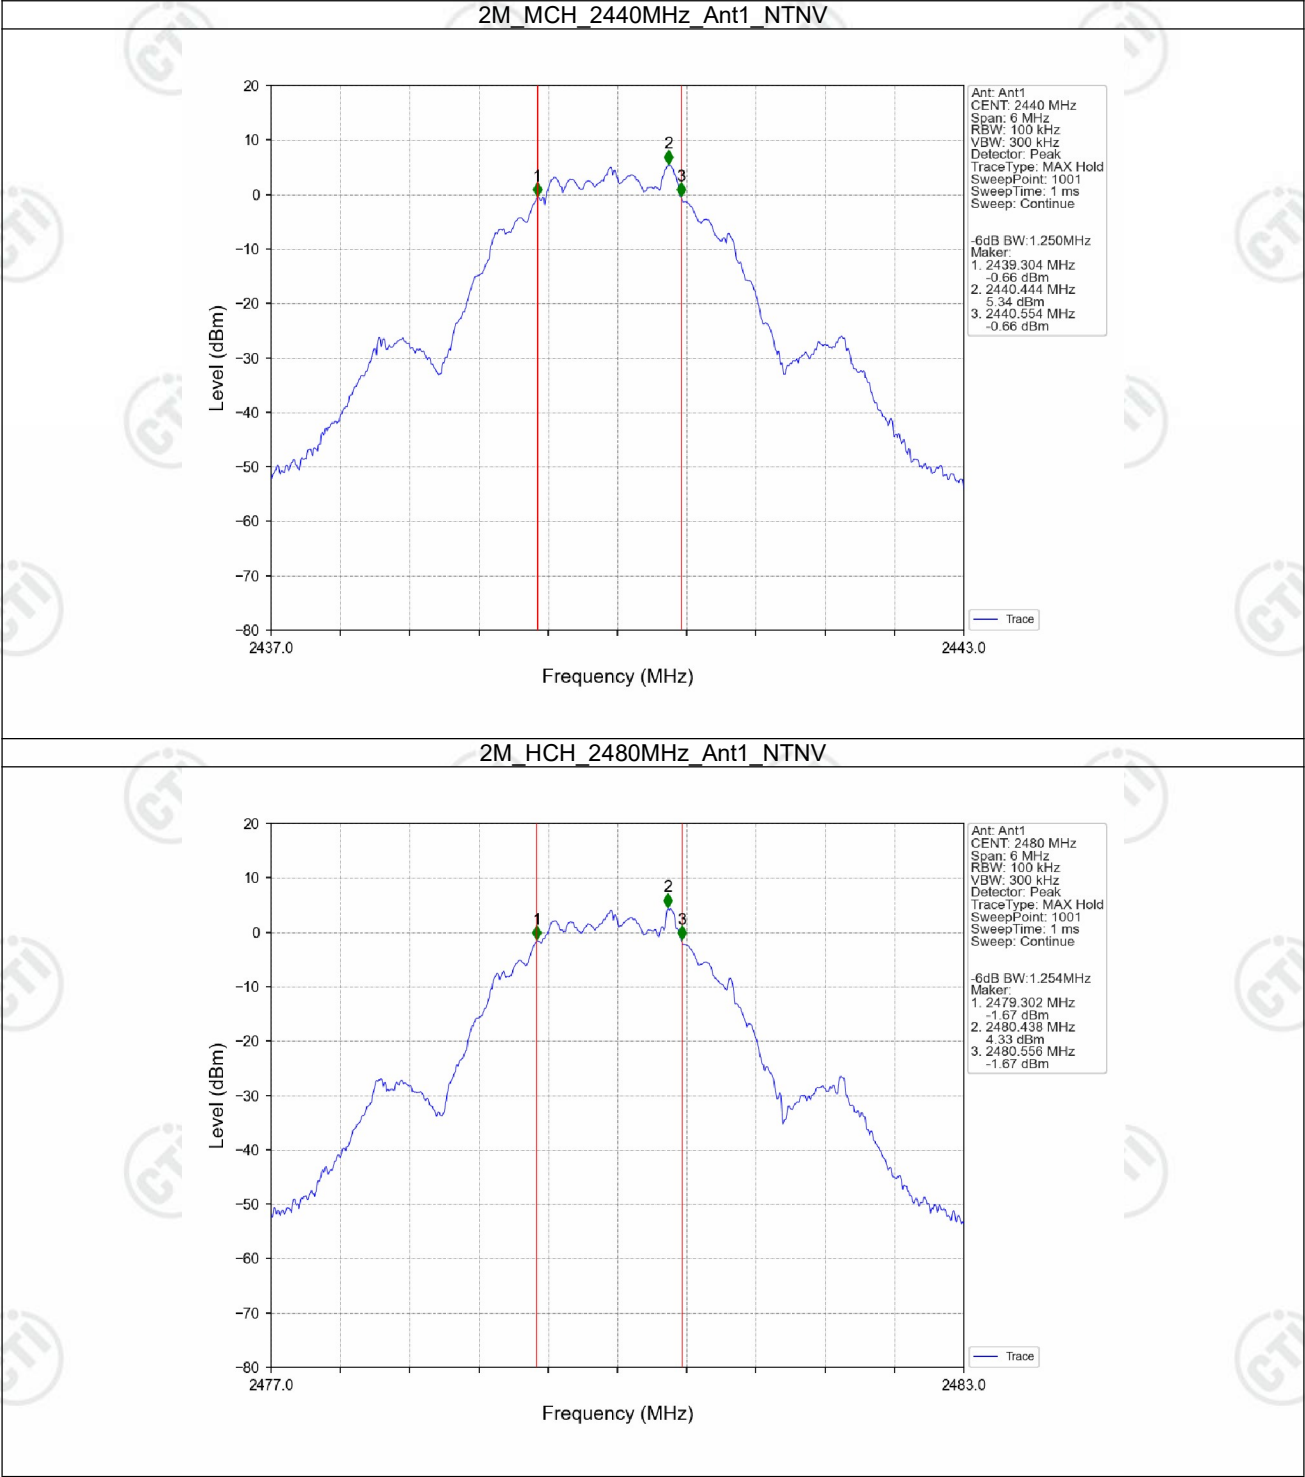

3. Maximum Conducted Output Power

3.1 Test Result


3.1.1 Power


Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	6.98	<=30	Pass
		2440	6.79	<=30	Pass
		2480	5.80	<=30	Pass
2M	SISO	2402	7.02	<=30	Pass
		2440	6.82	<=30	Pass
		2480	5.87	<=30	Pass


Note1: Antenna Gain: Ant1: 1.47dBi;

3.2 Test Graph

3.2.1 Power

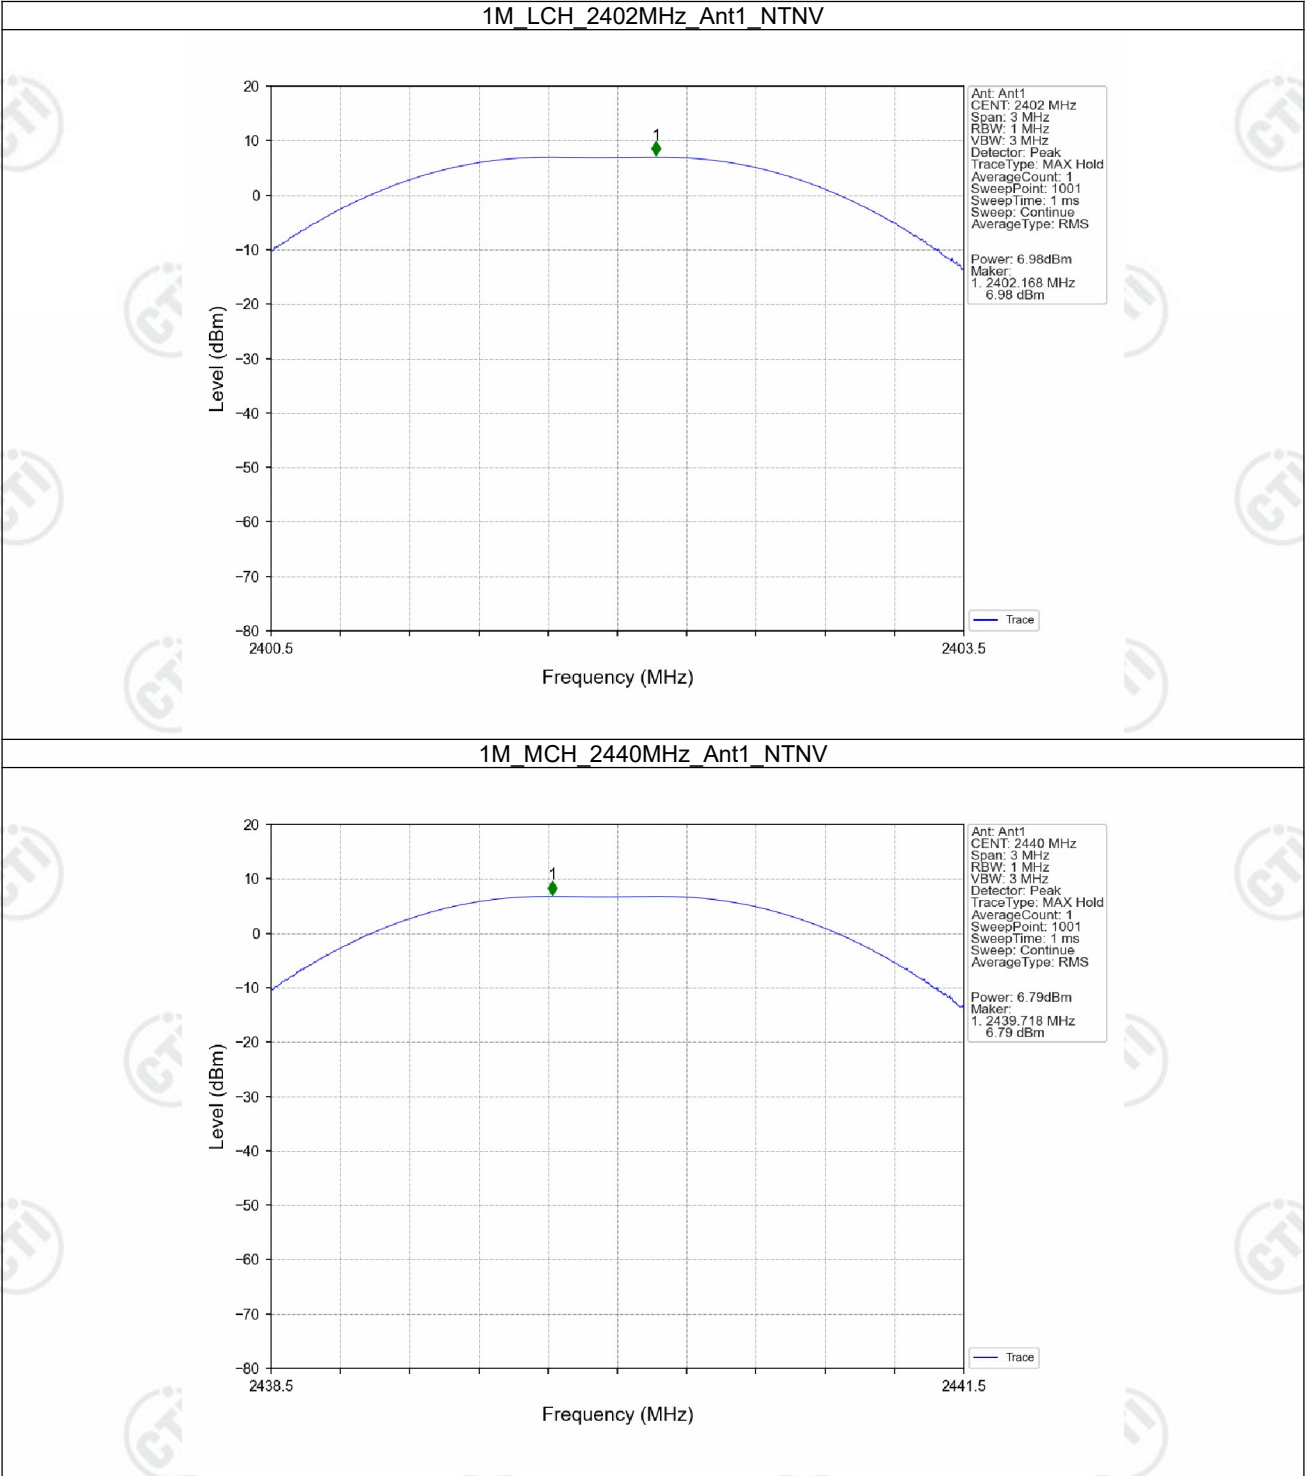

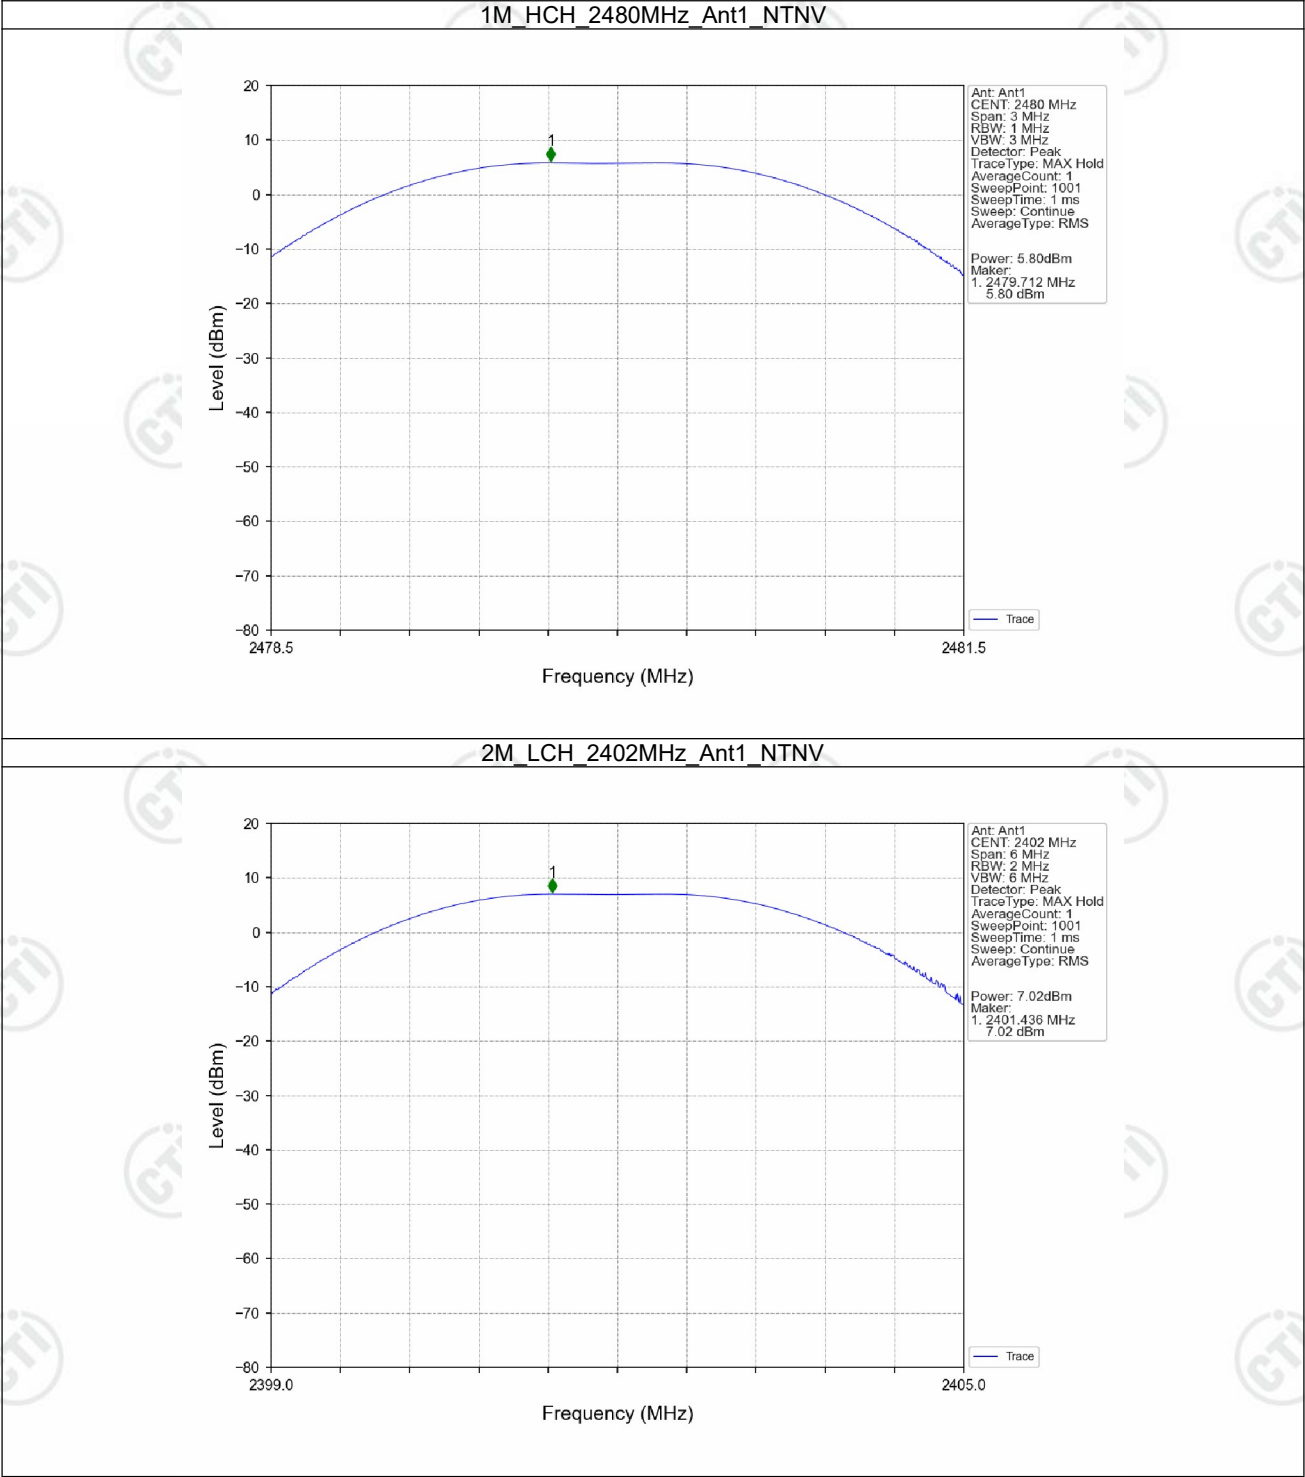

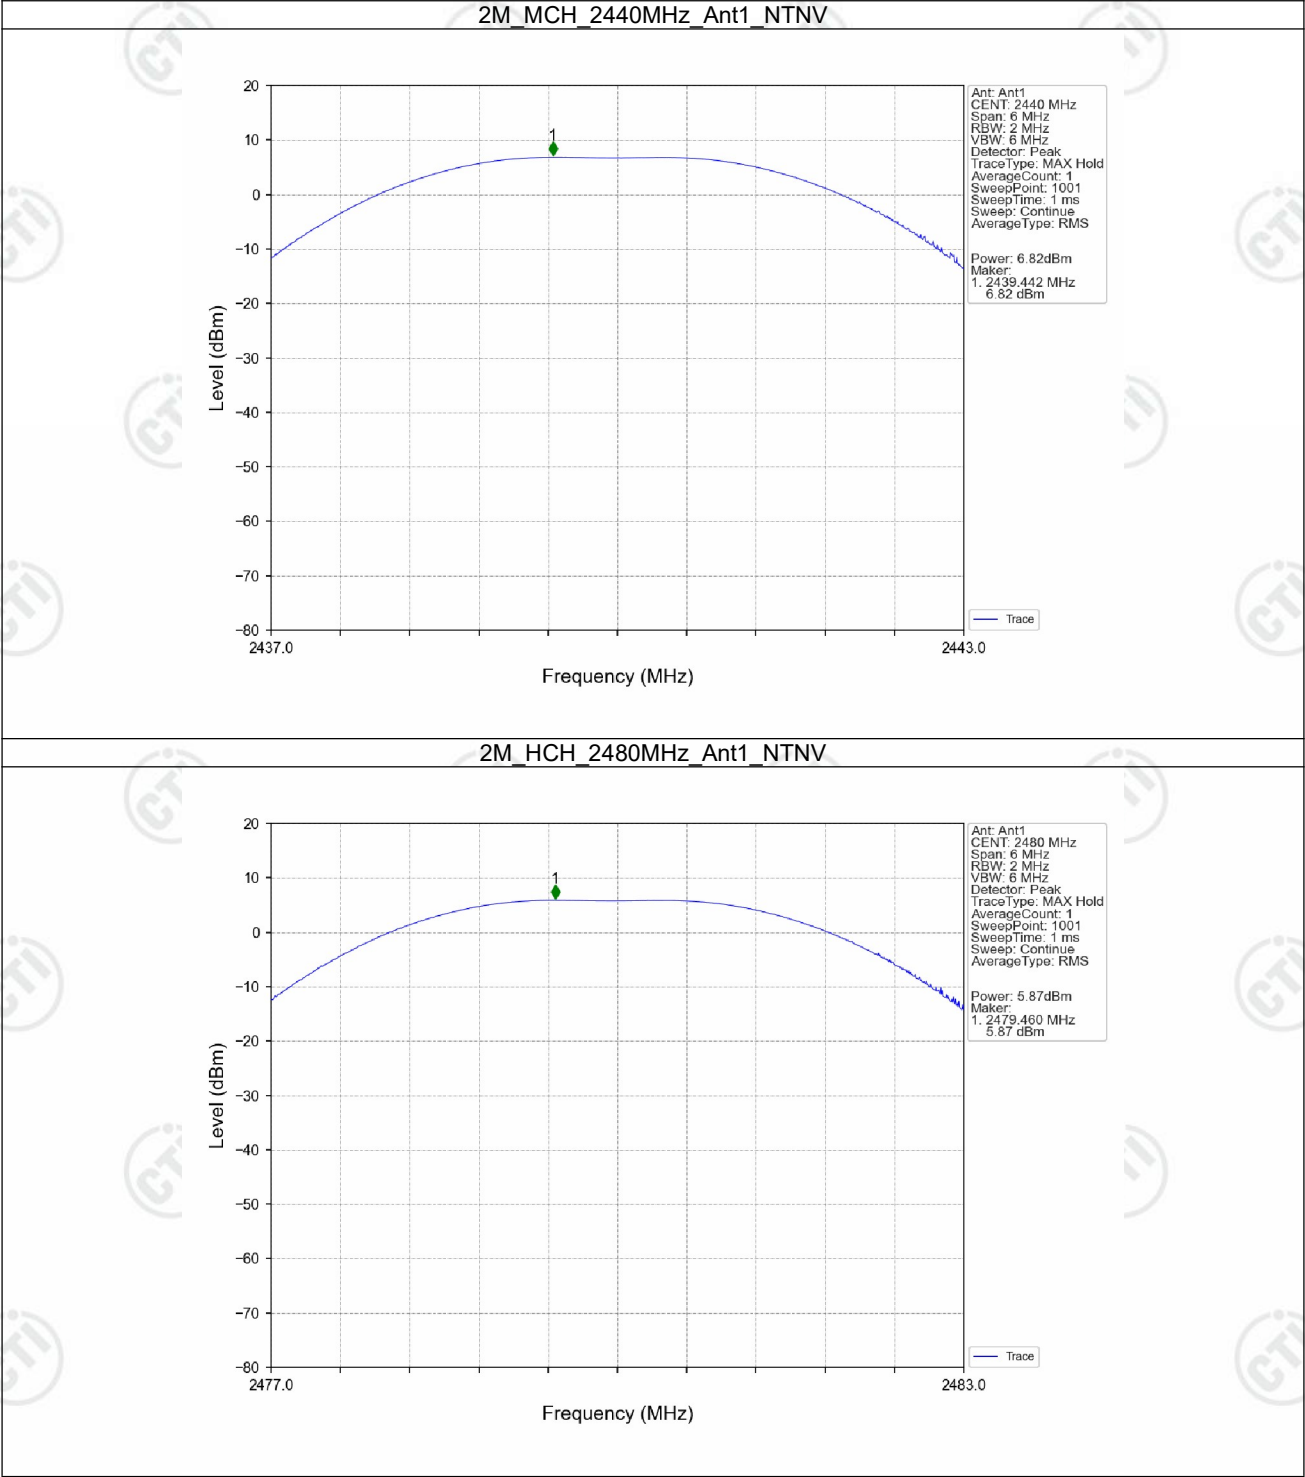

4. Maximum Power Spectral Density

4.1 Test Result


4.1.1 PSD


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit(dBm/3kHz)	
1M	SISO	2402	-8.15dBm/3kHz	<=8	Pass
		2440	-8.54dBm/3kHz	<=8	Pass
		2480	-9.60dBm/3kHz	<=8	Pass
2M	SISO	2402	-12.03dBm/3kHz	<=8	Pass
		2440	-12.53dBm/3kHz	<=8	Pass
		2480	-13.26dBm/3kHz	<=8	Pass


Note1: Antenna Gain: Ant1: 1.47dBi;

4.2 Test Graph

4.2.1 PSD

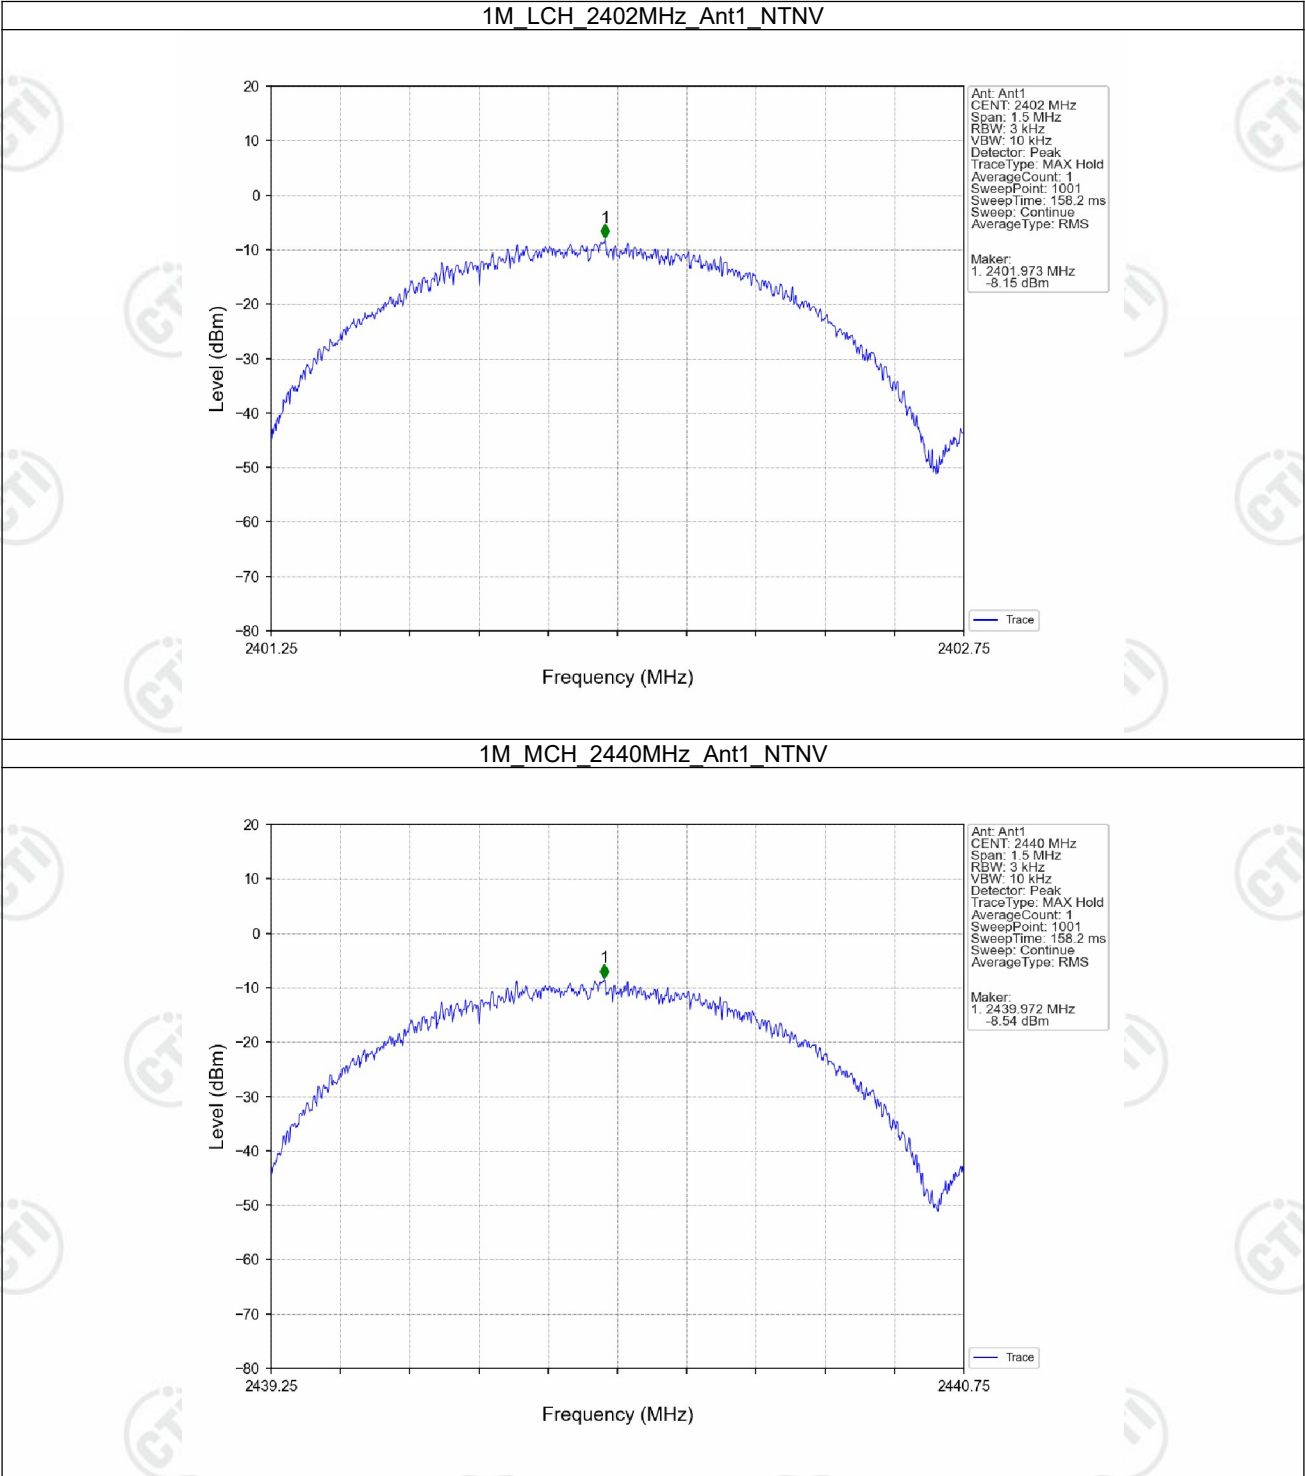

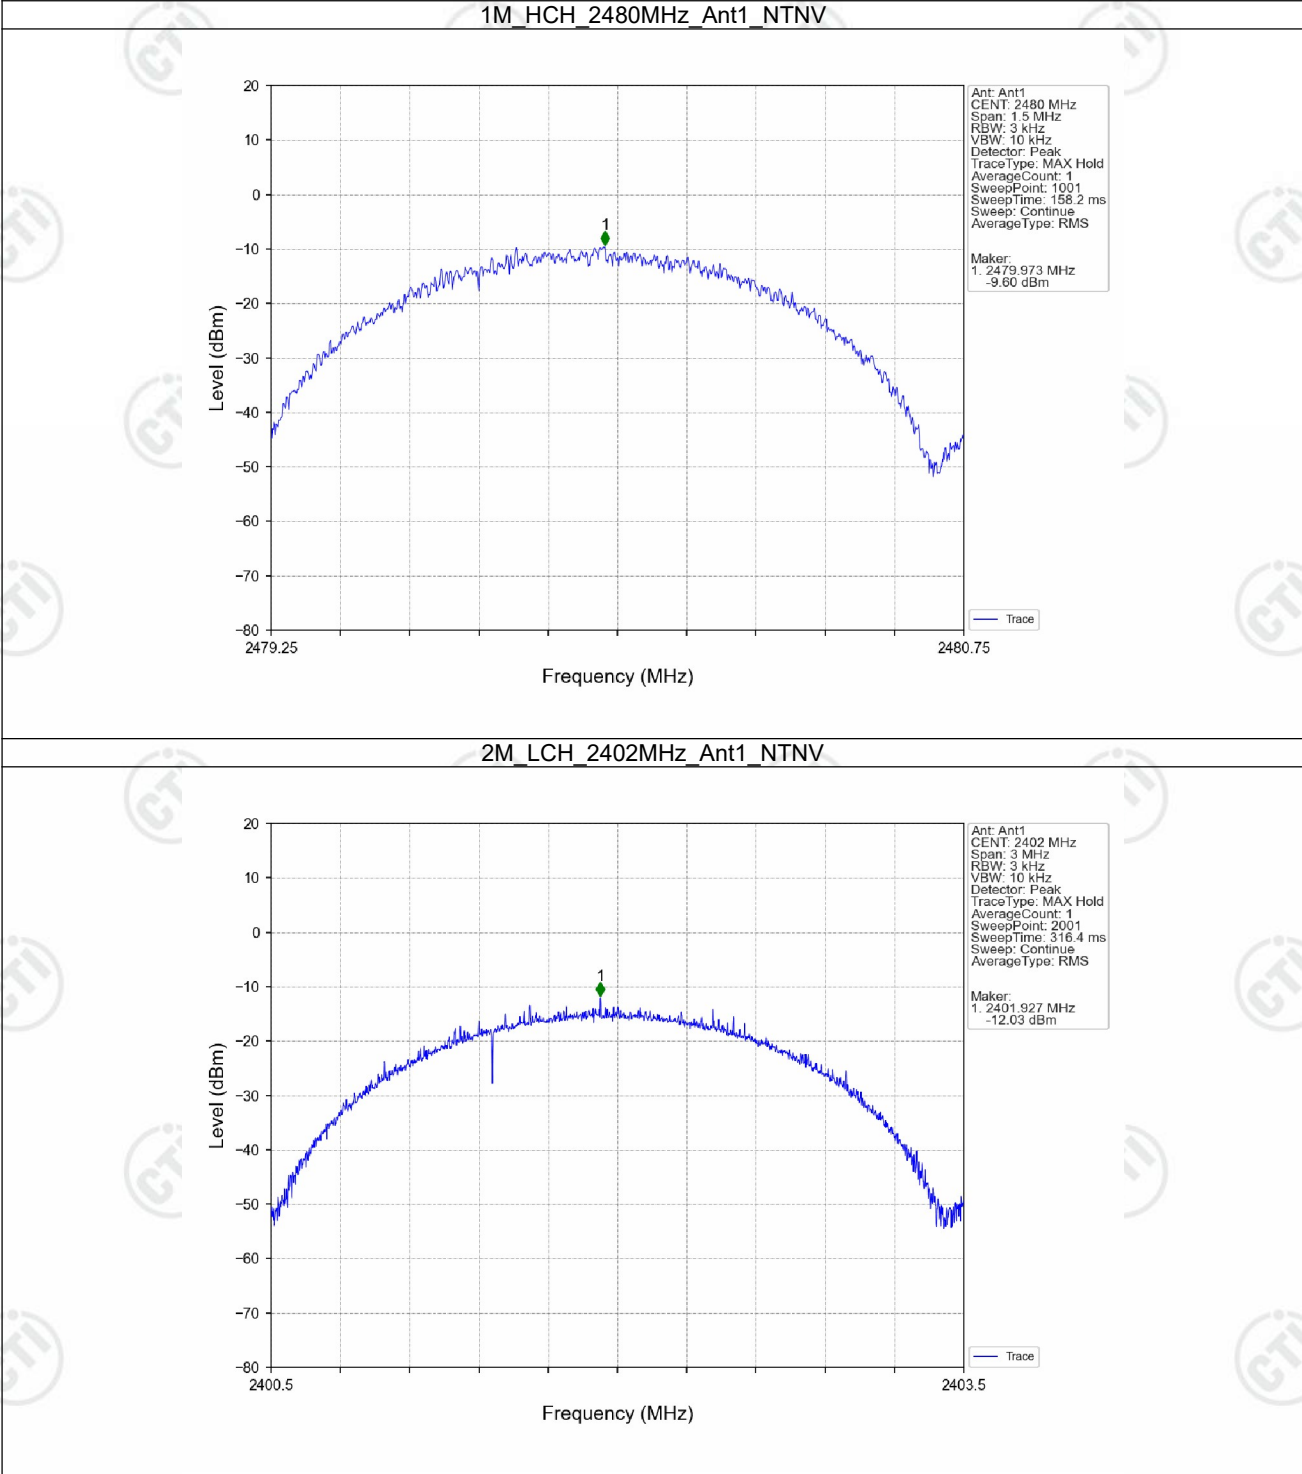

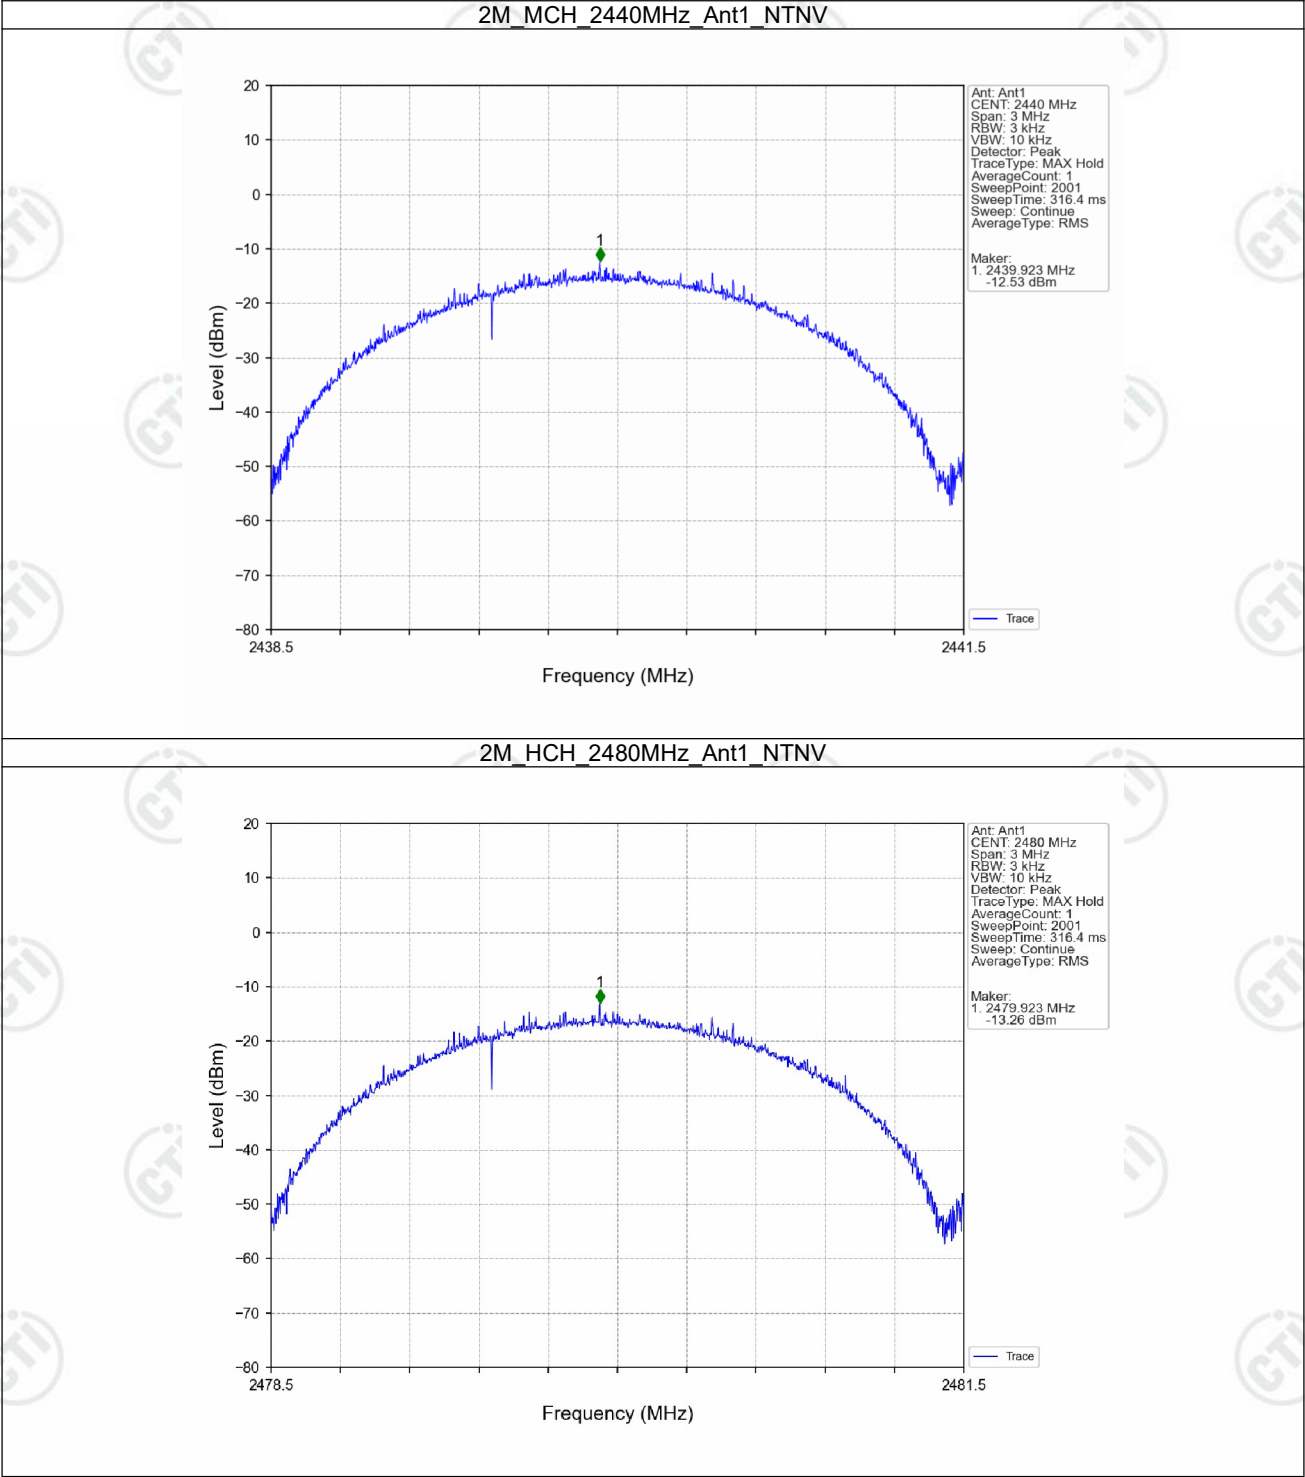

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	6.54
		2440	1	6.34
		2480	1	5.12
2M	SISO	2402	1	5.50
		2440	1	5.29
		2480	1	4.31

5.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	6.54	-13.46	Pass
		2440	1	6.54	-13.46	Pass
		2480	1	6.54	-13.46	Pass
2M	SISO	2402	1	5.50	-14.50	Pass
		2440	1	5.50	-14.50	Pass
		2480	1	5.50	-14.50	Pass

5.2 Test Graph

5.2.1 Ref

