


Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	\	Test_Date	2026/7/24


Test Graph

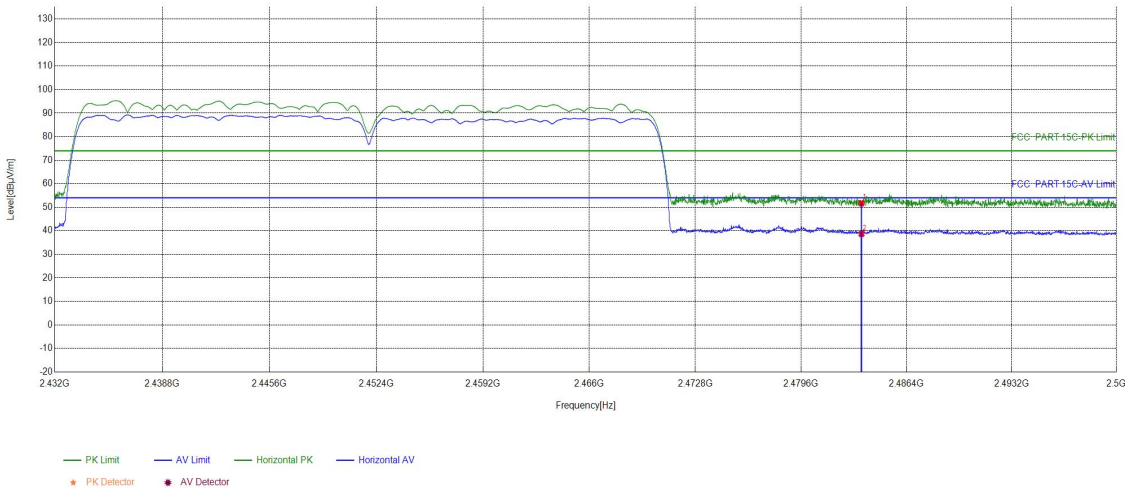

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.41	51.70	74.00	22.30	PASS	Horizontal	PK
2	2483.5	16.29	22.40	38.69	54.00	15.31	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	\	Test_Date	2026/7/24


Test Graph

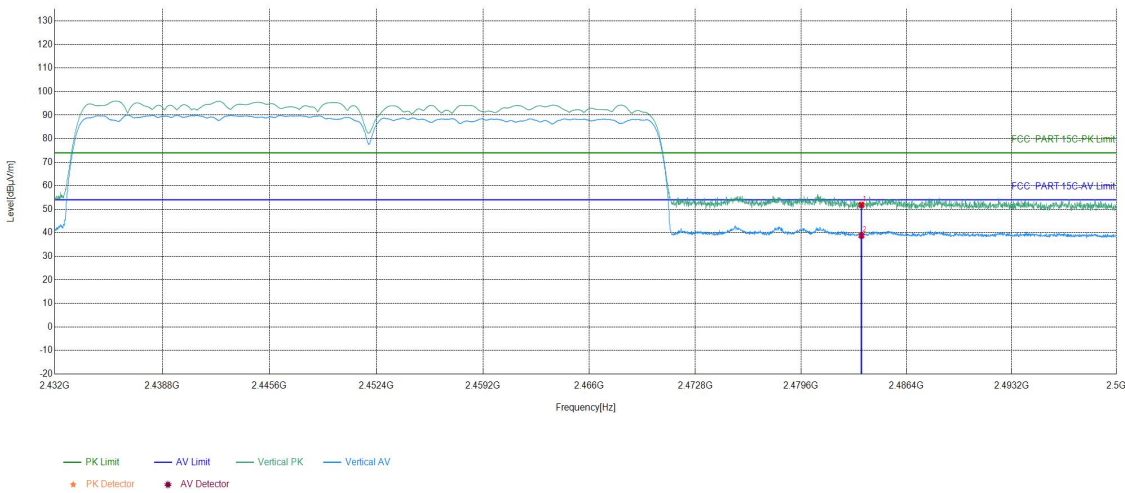

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.55	51.84	74.00	22.16	PASS	Vertical	PK
2	2483.5	16.29	22.53	38.82	54.00	15.18	PASS	Vertical	AV

Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/7/24


Test Graph

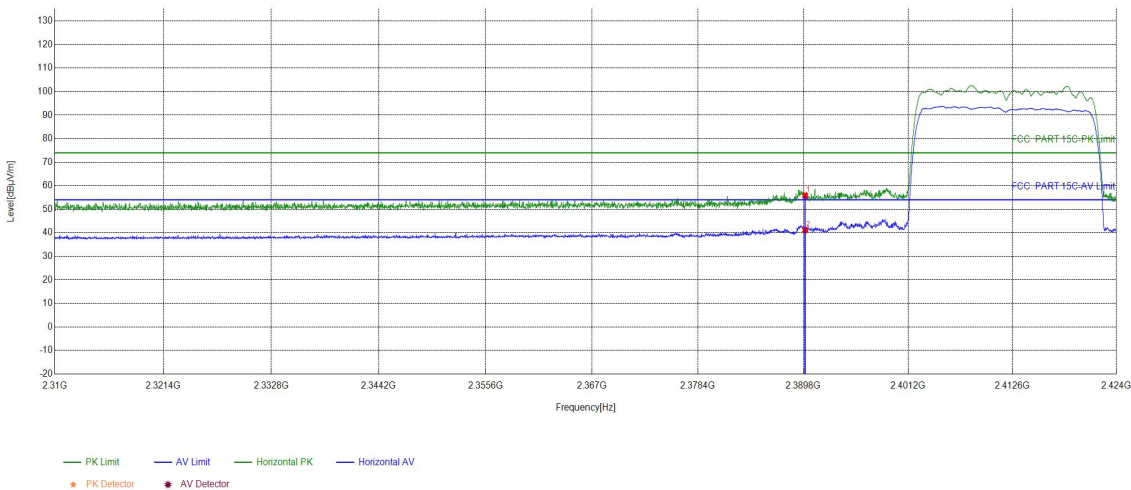

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	39.82	55.78	74.00	18.22	PASS	Horizontal	PK
2	2390	15.96	25.16	41.12	54.00	12.88	PASS	Horizontal	AV

Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/7/24


Test Graph

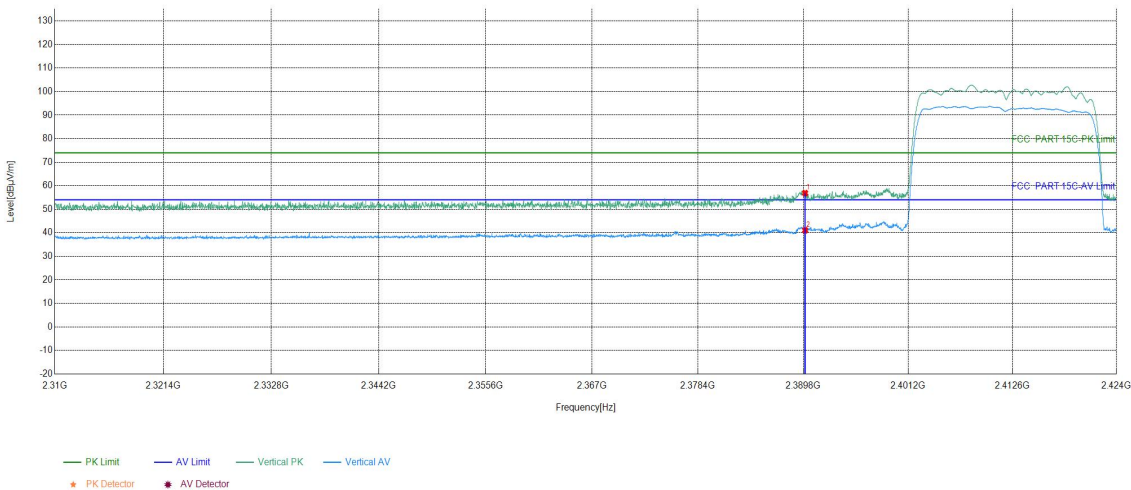

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	40.89	56.85	74.00	17.15	PASS	Vertical	PK
2	2390	15.96	25.08	41.04	54.00	12.96	PASS	Vertical	AV

Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/7/24


Test Graph

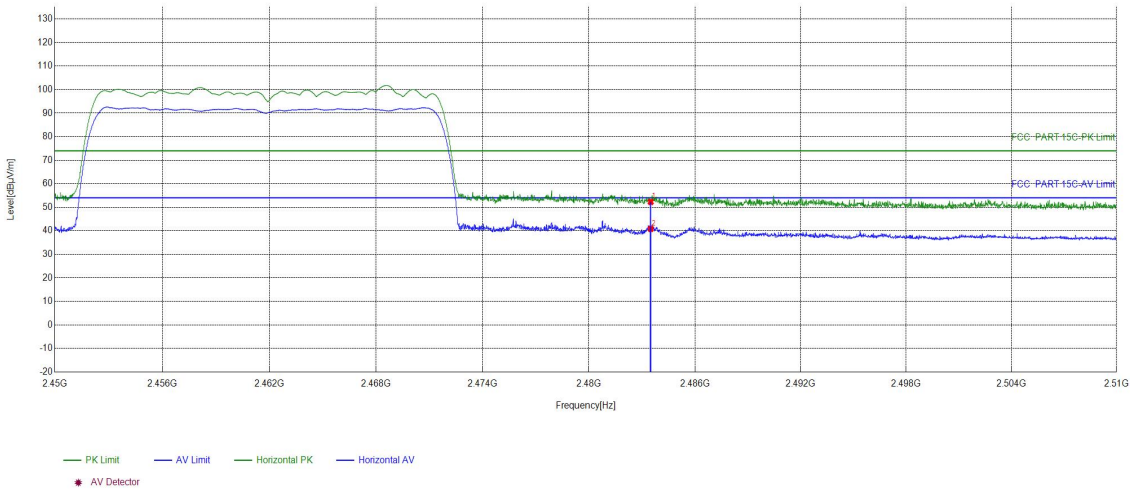

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.98	52.27	74.00	21.73	PASS	Horizontal	PK
2	2483.5	16.29	24.51	40.80	54.00	13.20	PASS	Horizontal	AV

Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/7/24


Test Graph

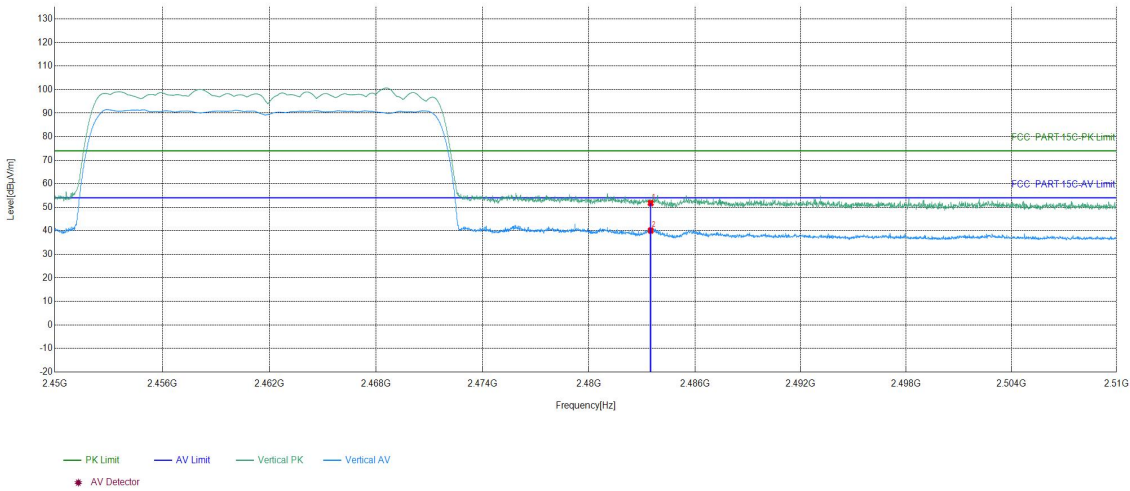

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.44	51.73	74.00	22.27	PASS	Vertical	PK
2	2483.5	16.29	23.82	40.11	54.00	13.89	PASS	Vertical	AV

Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	\	Test_Date	2026/7/24


Test Graph

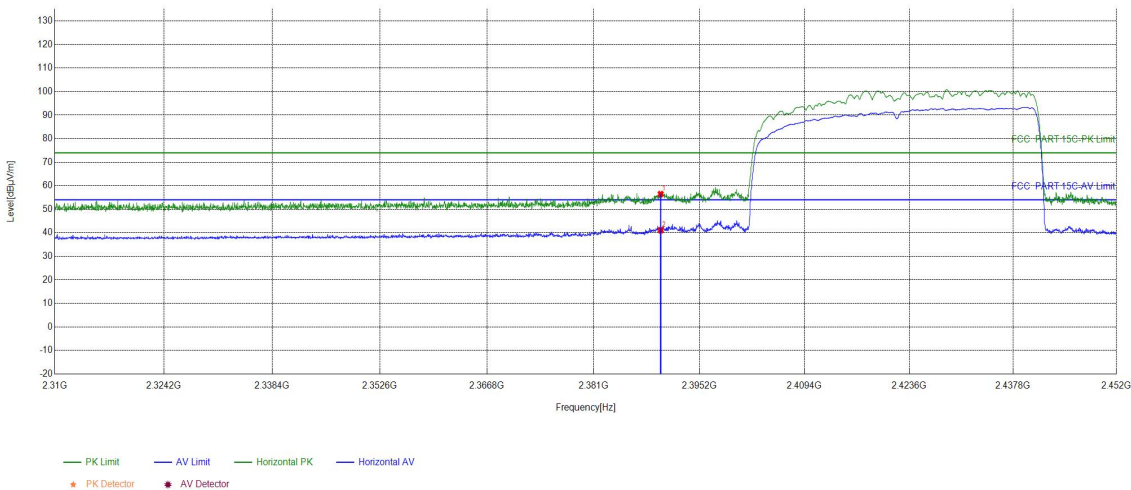

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	40.50	56.46	74.00	17.54	PASS	Horizontal	PK
2	2390	15.96	25.11	41.07	54.00	12.93	PASS	Horizontal	AV

Test_Mode	802.11 ax(HE40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	\	Test_Date	2026/7/24

Test Graph

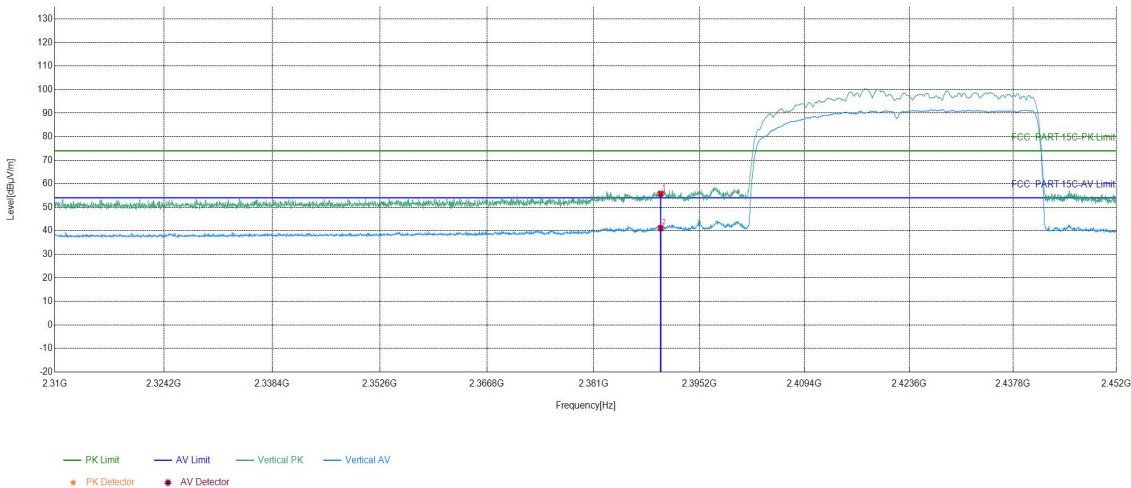

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	39.78	55.74	74.00	18.26	PASS	Vertical	PK
2	2390	15.96	25.17	41.13	54.00	12.87	PASS	Vertical	AV