



Duty Cycle

Condition	Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)	Max Variation (%)
NVNT	a	5500	0.789	0.834	94.6	0.24	1.27	0.19
NVNT	a	5580	0.789	0.837	94.27	0.26	1.27	0.18
NVNT	a	5700	0.789	0.837	94.27	0.26	1.27	0.16

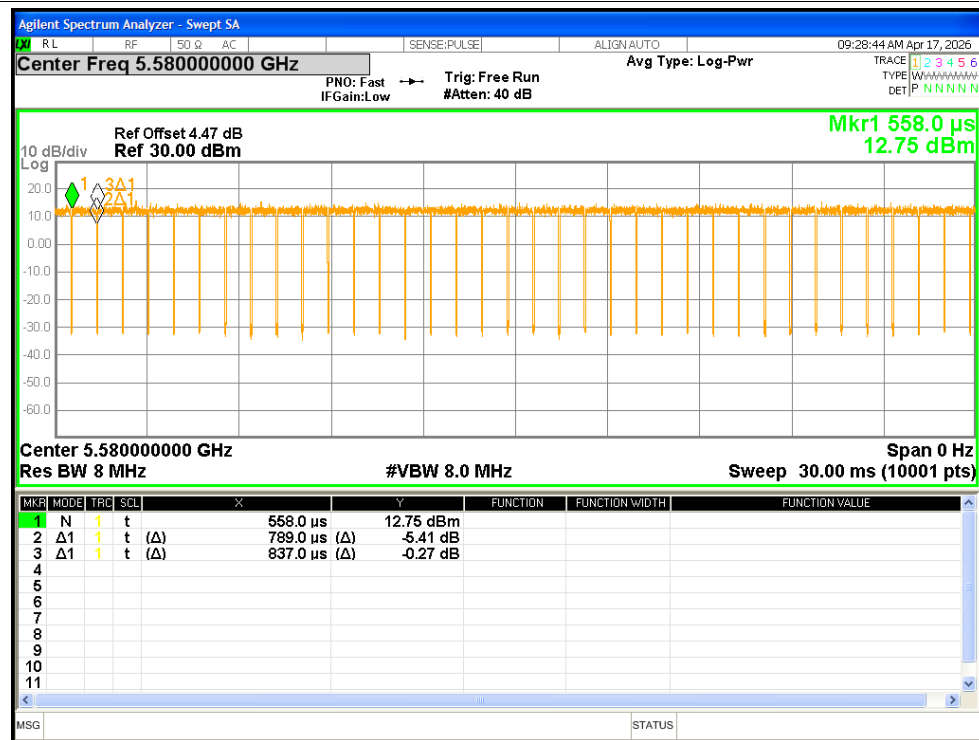

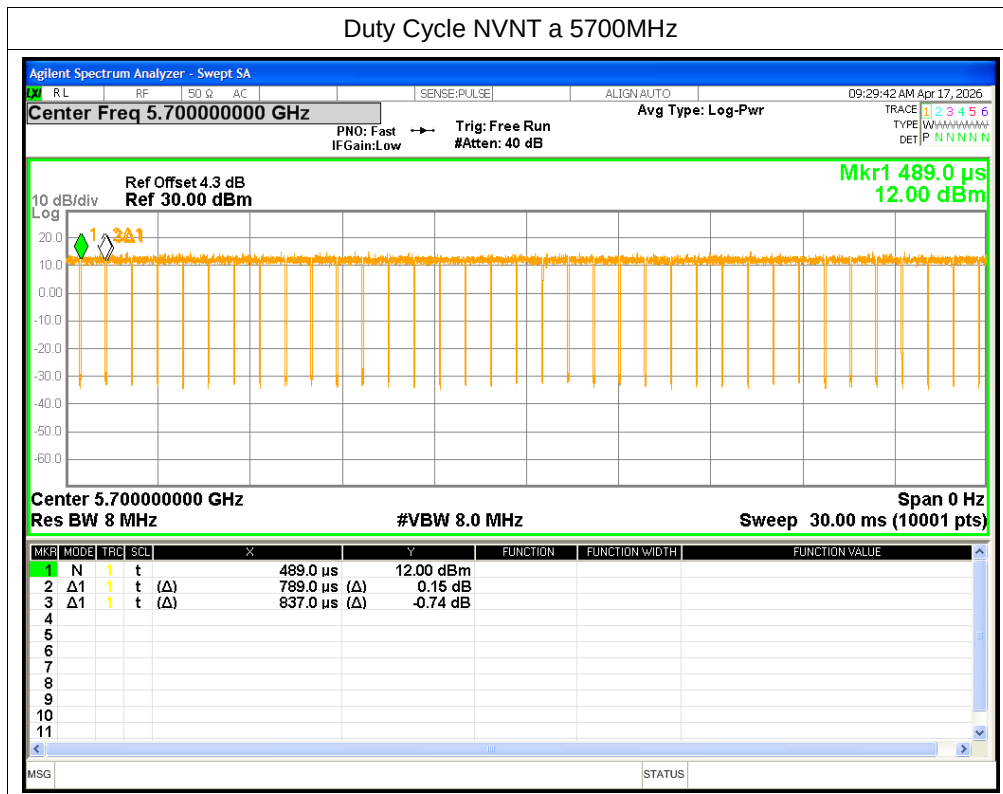


Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5500	11.29	0.24	11.53	<=24	Pass
NVNT	a	5580	11.5	0.26	11.76	<=24	Pass
NVNT	a	5700	11.29	0.26	11.55	<=24	Pass


Test Graphs

Power NVNT a 5500MHz

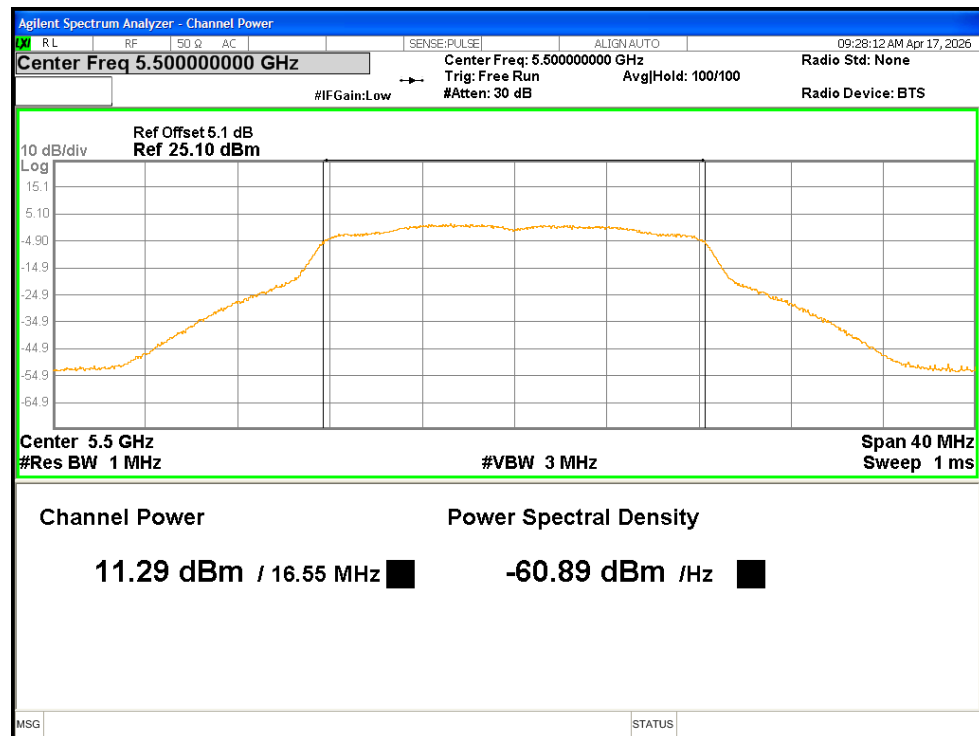

Power NVNT a 5580MHz

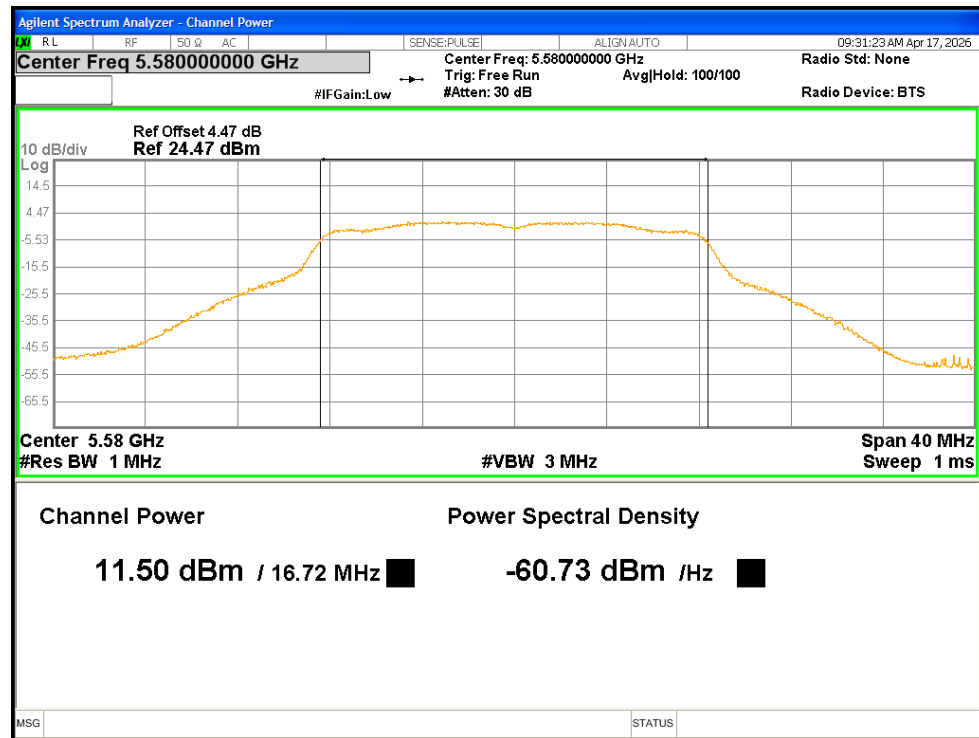

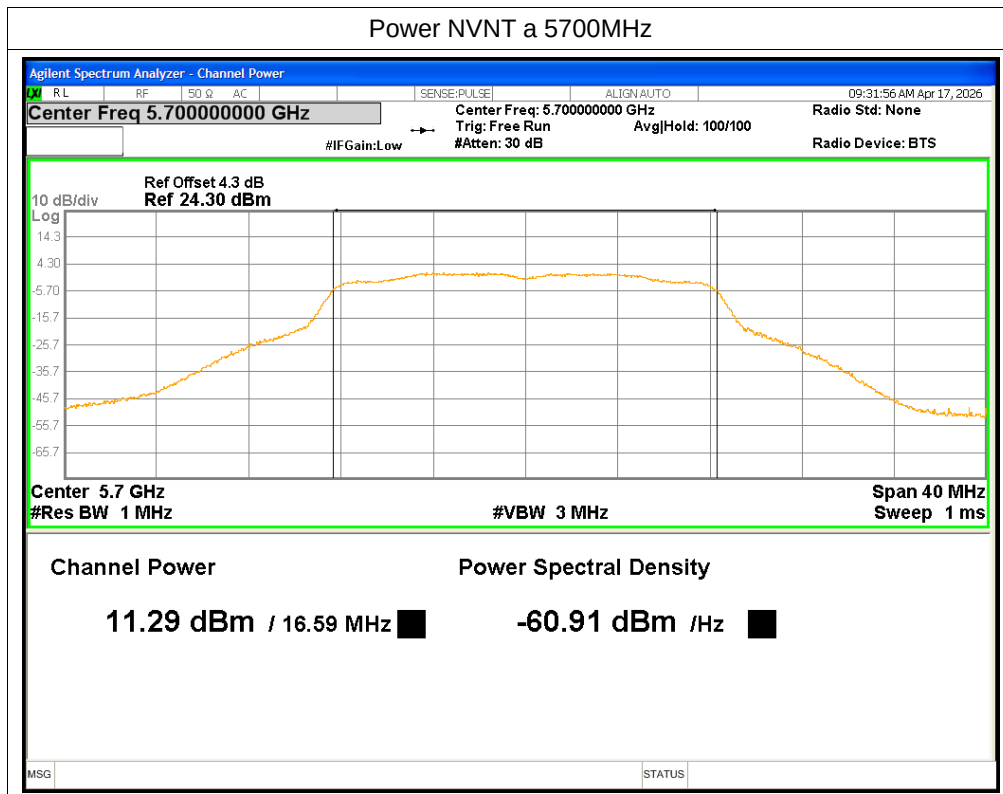


-26dB Bandwidth


Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5500	23.49	Pass
NVNT	a	5580	23.7	Pass
NVNT	a	5700	23.57	Pass


Test Graphs

-26dB Bandwidth NVNT a 5500MHz

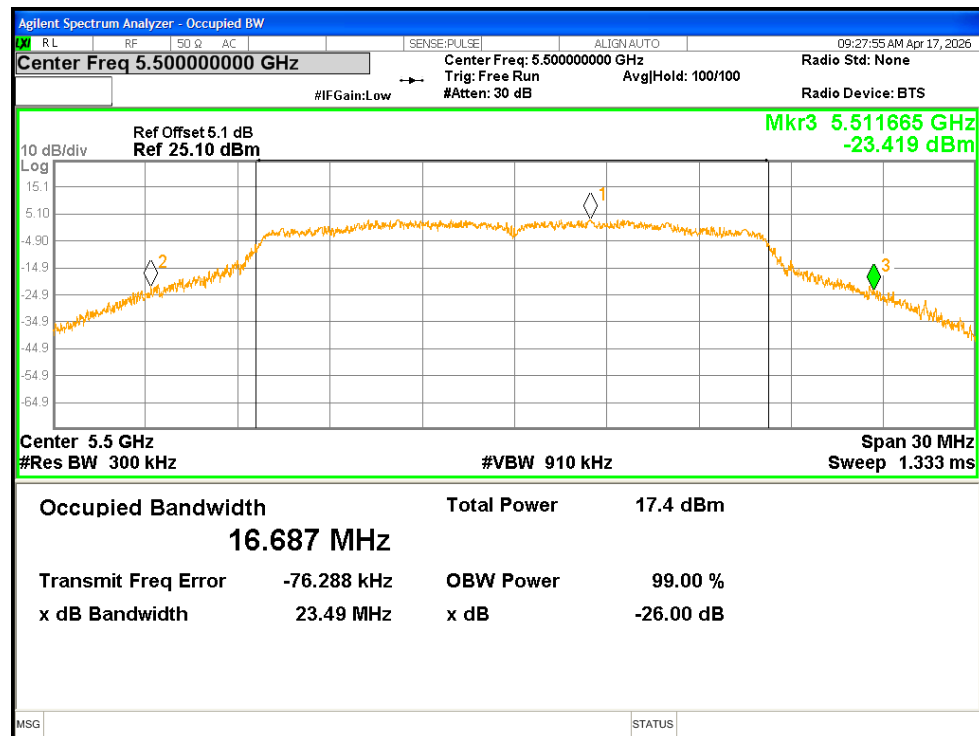

-26dB Bandwidth NVNT a 5580MHz

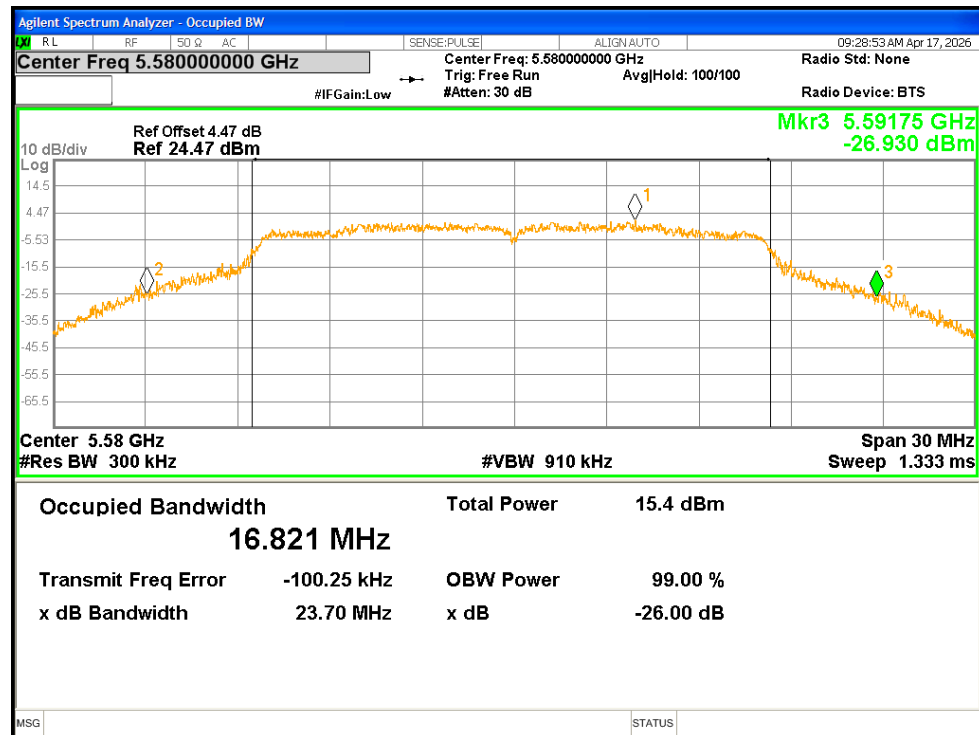

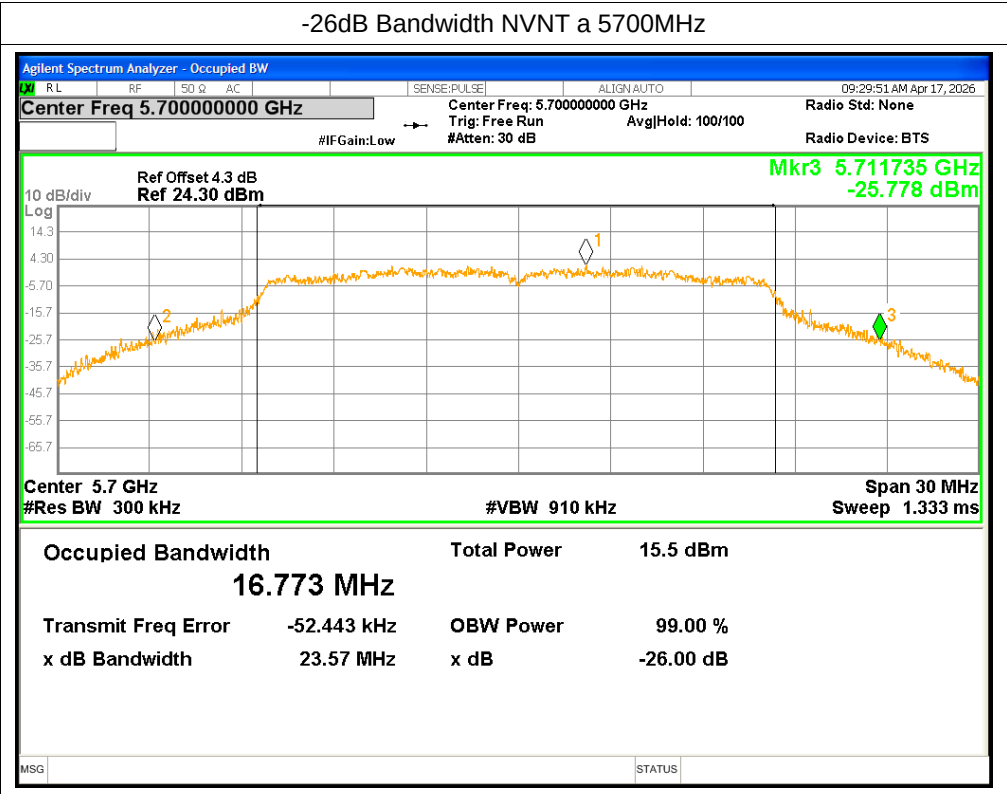


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5500	16.547
NVNT	a	5580	16.715
NVNT	a	5700	16.588


Test Graphs

OBW NVNT a 5500MHz

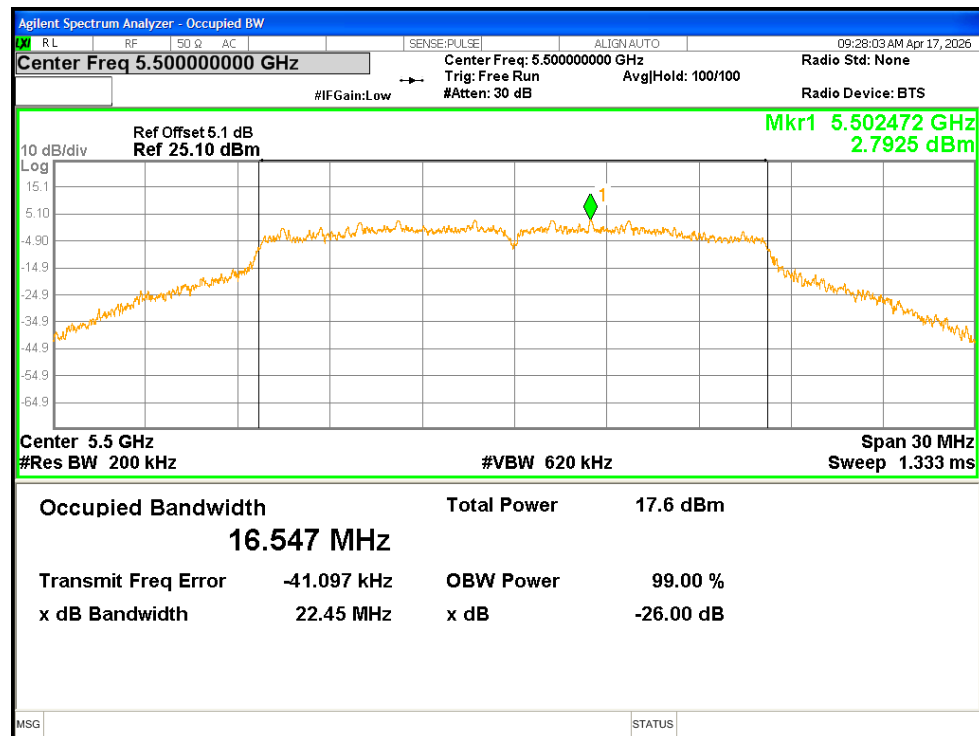

OBW NVNT a 5580MHz

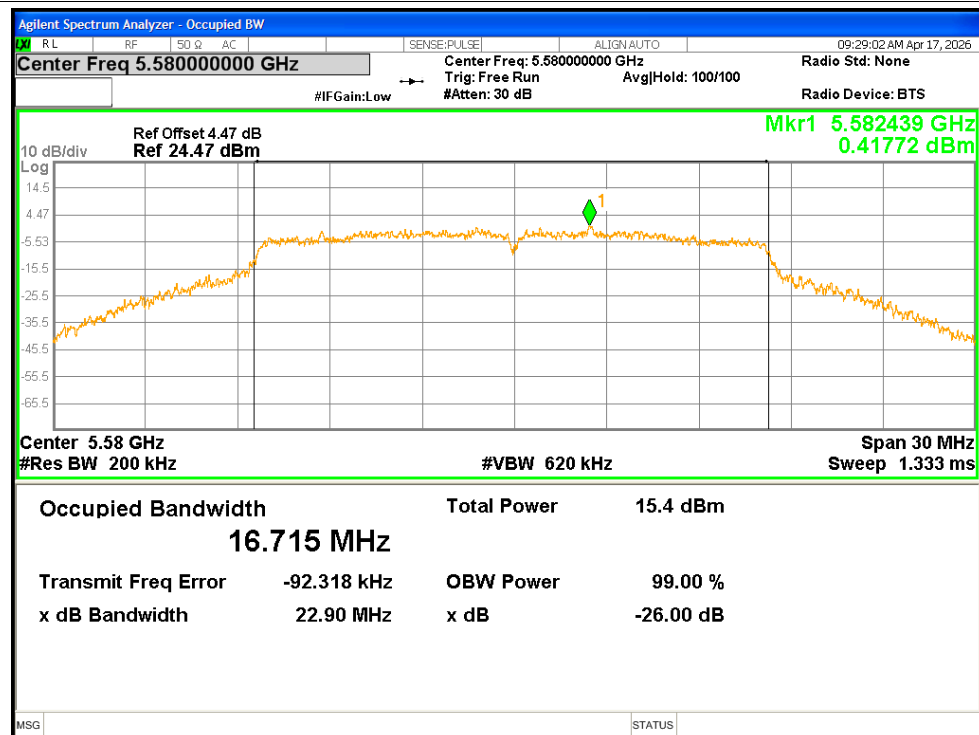

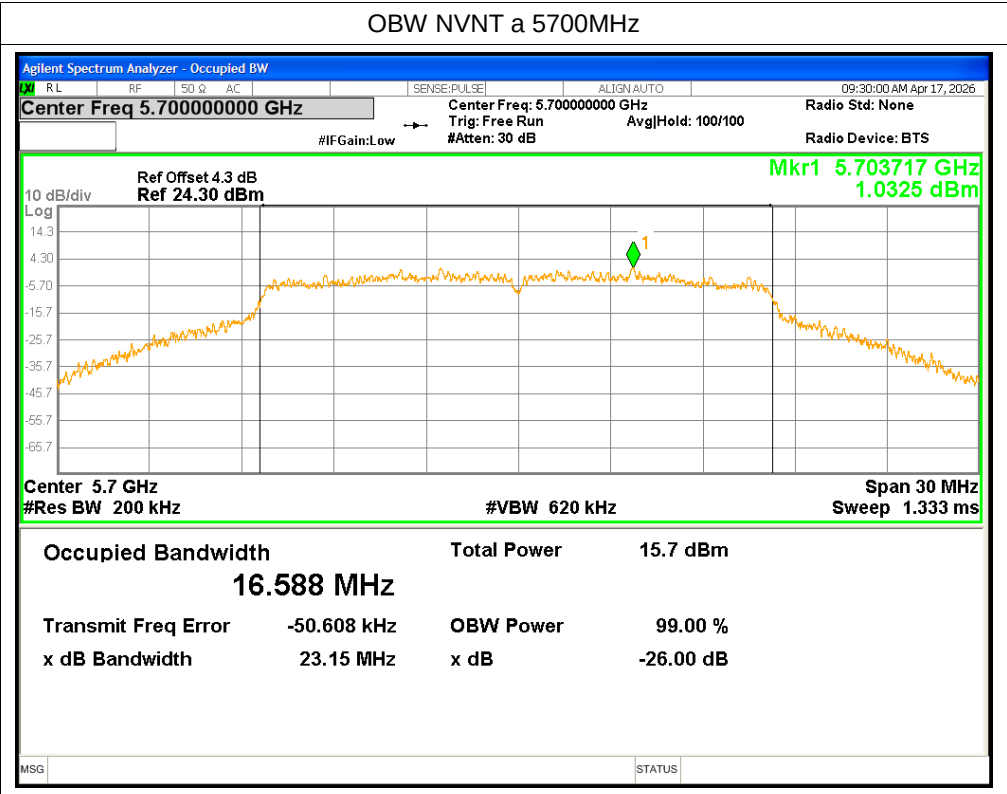


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5500	1.561	0.24	1.801	<=11	Pass
NVNT	a	5580	1.747	0.26	2.007	<=11	Pass
NVNT	a	5700	1.451	0.26	1.711	<=11	Pass

Test Graphs

PSD NVNT a 5500MHz

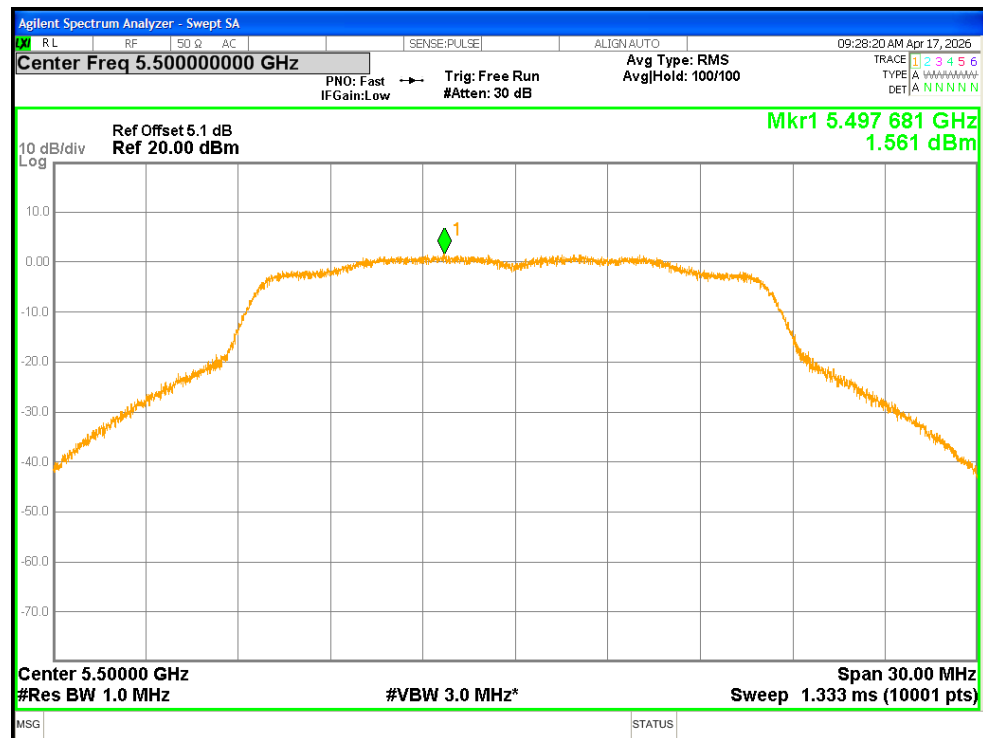

PSD NVNT a 5580MHz

