

**CFR 47 FCC PART 2  
CFR 47 FCC PART 22 H, RSS-132 Issue 4  
CFR 47 FCC PART 24 E, RSS-133 Issue 7  
CFR 47 FCC PART 27 C, RSS-130 Issue 2, RSS-139 Issue 4  
CFR 47 FCC PART 90 S**

**TEST REPORT**

*For*

**Solar Luminaire Controller**

**MODEL NUMBER: 26-0015**

**REPORT NUMBER: E04A26041200F00201**

**ISSUE DATE: August 14, 2026**

**FCC ID: 2BVVH260015ASTD**

**IC: 35525-260015ASTD**

*Prepared for*

**FCC: FIRST LIGHT TECHNOLOGIES LTD.**

**ISED: FirstLight Technologies**

**FCC/ISED: 2330 Government Street, Victoria, BC, V8T 5G5, Canada**

*Prepared by*

**Guangdong Global Testing Technology Co., Ltd.**

**Room 101-105, 203-210, Building 1, No.2, Keji 8 Road, Songshan Lake Park,  
Dongguan city, Guangdong, People's Republic of China, 523808**

**This report is based on a single evaluation of the submitted sample(s) of the above mentioned product, it does not imply an assessment of the production of the products.**

**This report shall not be reproduced, except in full, without the written approval of  
Guangdong Global Testing Technology Co., Ltd.**

Revision History

| Rev. | Issue Date      | Revisions     | Revised By |
|------|-----------------|---------------|------------|
| V0   | August 14, 2026 | Initial Issue |            |

| Summary of Test Results                                                                                                                                                                                                                                               |                                              |                                                                                                       |        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|-------------------------------------------------------------------------------------------------------|--------|
| N0.                                                                                                                                                                                                                                                                   | Test Case                                    | Clause in FCC rules                                                                                   | Result |
| 1                                                                                                                                                                                                                                                                     | RF Power Output and Effective Radiated Power | 2.1046,<br>22.913(a)(5),<br>24.232(c),<br>27.50(d)(4),<br>27.50(b)(10),<br>27.50(c)(10),<br>90.635(b) | PASS   |
| 2                                                                                                                                                                                                                                                                     | Occupied Bandwidth                           | 2.1049,<br>90.209                                                                                     | Note 1 |
| 3                                                                                                                                                                                                                                                                     | Band Edge Compliance                         | 2.1051,<br>22.917(a),<br>24.238(a),<br>27.53(h),<br>27.53(g),<br>27.53(f),<br>27.53(c),<br>90.691     | Note 1 |
| 4                                                                                                                                                                                                                                                                     | Peak-to-Average Power Ratio                  | 22.913(d),<br>24.232,<br>27.50(d),<br>KDB 971168 D01(5.7)                                             | Note 1 |
| 5                                                                                                                                                                                                                                                                     | Frequency Stability                          | 2.1055,<br>22.355,<br>24.235,<br>27.54,<br>90.213                                                     | Note 1 |
| 6                                                                                                                                                                                                                                                                     | Spurious Emissions at Antenna Terminals      | 2.1051,<br>22.917(a),<br>24.238(a),<br>27.53(h),<br>27.53(g),<br>27.53(f),<br>27.53(c),<br>90.691     | Note 1 |
| 7                                                                                                                                                                                                                                                                     | Radiated Spurious Emissions                  | 2.1053,<br>22.917 (a),<br>24.238(a),<br>27.53(h),<br>27.53(g),<br>27.53(f),<br>27.53(c),<br>90.691    | PASS   |
| Note:<br>1. Please refer to the report: <b>R2301A0022-R1V1, R2301A0022-R2V1, R2301A0022-R3V1, R2301A0022-R4V1, R2301A0022-R5V1, R2301A0022-R6V1, R2301A0022-R7V1, R2301A0022-R8V1.</b><br><b>LTE Module FCC ID: XMR2021BG950AGL, Issue Date of Grant: 05/12/2023.</b> |                                              |                                                                                                       |        |

**The 4G module antenna type has been changed from external rod to internal SMD, and the antenna gain is slightly higher compared to the original module's certification.**

2. This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

3. The measurement result for the sample received is <Pass> according to < CFR 47 FCC Part 2, Part 22 H, Part 24 E, Part 27 C, Part 90 S > when <Accuracy Method> decision rule is applied.

| Summary of Test Results |                                              |                                                                                  |        |
|-------------------------|----------------------------------------------|----------------------------------------------------------------------------------|--------|
| N0.                     | Test Case                                    | Clause in IC rules                                                               | Result |
| 1                       | RF Power Output and Effective Radiated Power | RSS-130: 4.6,<br>RSS-132: 5.4,<br>RSS-133: 6.4,<br>RSS-139: 6.5                  | PASS   |
| 2                       | Occupied Bandwidth                           | RSS-Gen: 6.7,<br>RSS-196 4.3                                                     | Note 1 |
| 3                       | Band Edge Compliance                         | RSS-130: 4.7,<br>RSS-132: 5.5,<br>RSS-133: 6.5,<br>RSS-139: 6.6                  | Note 1 |
| 4                       | Peak-to-Average Power Ratio                  | RSS-130: 4.6,<br>RSS-132: 5.4,<br>RSS-133: 6.4,<br>RSS-139 6.5                   | Note 1 |
| 5                       | Frequency Stability                          | RSS-130: 4.5,<br>RSS-132: 5.3,<br>RSS-133: 6.3,<br>RSS-139: 6.4,<br>RSS-Gen 6.11 | Note 1 |
| 6                       | Spurious Emissions at Antenna Terminals      | RSS-130: 4.7,<br>RSS-132: 5.5,<br>RSS-133: 6.5,<br>RSS-139: 6.6                  | Note 1 |
| 7                       | Radiated Spurious Emissions                  | RSS-130 4.7,<br>RSS-132: 5.5,<br>RSS-133: 6.5,<br>RSS-139: 6.6                   | PASS   |
| 8                       | Receiver Spurious Emissions                  | RSS-Gen 7.3                                                                      | PASS   |
| 9                       | AC Power Line Conducted Emissions            | RSS-Gen 7.2                                                                      | N/A    |

Note:

1. Please refer to the report: **R2301A0023-R1V2, R2301A0023-R2V1, R2301A0023-R3V2, R2301A0023-R4V2, R2301A0023-R5V1, R2301A0023-R6V2, R2301A0023-R7V2.**

**LTE Module IC: 10224A-2021BG950A, Issue Date of Grant: 17 May 2023.**

**The 4G module antenna type has been changed from external rod to internal SMD, and the antenna gain is slightly higher compared to the original module's certification.**

2. N/A: In this whole report not applicable.

3. This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

4. The measurement result for the sample received is <Pass> according to < RSS-130 Issue 2, RSS-132 Issue 4 , RSS-133 Issue 7, RSS-139 Issue 4, RSS-Gen Issue 5> when <Accuracy Method> decision rule is applied.

## TABLE OF CONTENTS

|                                                             |            |
|-------------------------------------------------------------|------------|
| <b>1. ATTESTATION OF TEST RESULTS .....</b>                 | <b>7</b>   |
| <b>2. TEST METHODOLOGY .....</b>                            | <b>9</b>   |
| <b>3. FACILITIES AND ACCREDITATION .....</b>                | <b>9</b>   |
| <b>4. CALIBRATION AND UNCERTAINTY .....</b>                 | <b>10</b>  |
| 4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>          | <i>10</i>  |
| 4.2. <i>MEASUREMENT UNCERTAINTY.....</i>                    | <i>10</i>  |
| <b>5. EQUIPMENT UNDER TEST .....</b>                        | <b>11</b>  |
| 5.1. <i>DESCRIPTION OF EUT .....</i>                        | <i>11</i>  |
| 5.2. <i>SUPPORT UNITS FOR SYSTEM TEST.....</i>              | <i>13</i>  |
| 5.3. <i>SETUP DIAGRAM .....</i>                             | <i>15</i>  |
| <b>6. MEASURING INSTRUMENT AND SOFTWARE USED .....</b>      | <b>16</b>  |
| <b>7. Test Case Results .....</b>                           | <b>17</b>  |
| 7.1. <i>Power Output and Effective Radiated Power .....</i> | <i>17</i>  |
| 7.2. <i>Radiated Spurious Emissions .....</i>               | <i>31</i>  |
| 7.3. <i>Receiver Spurious Emissions .....</i>               | <i>228</i> |

## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: FCC: FIRST LIGHT TECHNOLOGIES LTD.  
ISED: FirstLight Technologies  
Address: FCC/ISED: 2330 Government Street, Victoria, BC, V8T 5G5,  
Canada

### Manufacturer Information

Company Name: FCC: FIRST LIGHT TECHNOLOGIES LTD.  
ISED: FirstLight Technologies  
Address: FCC/ISED: 2330 Government Street, Victoria, BC, V8T 5G5,  
Canada

### EUT Information

Product Description: Solar Luminaire Controller  
Model: 26-0015  
Series Model: /  
Brand: /  
Sample Received Date: April 28, 2026  
Sample Status: Normal  
Sample ID: A26041200 001  
Date of Tested: April 28, 2026 to July 6, 2026

| APPLICABLE STANDARDS                                      |              |
|-----------------------------------------------------------|--------------|
| STANDARD                                                  | TEST RESULTS |
| CFR 47 FCC PART 2                                         | PASS         |
| CFR 47 FCC PART 22 H, RSS-132 Issue 4                     | PASS         |
| CFR 47 FCC PART 24 E, RSS-133 Issue 7                     | PASS         |
| CFR 47 FCC PART 27 C, RSS-130 Issue 2,<br>RSS-139 Issue 4 | PASS         |
| CFR 47 FCC PART 90 S                                      | PASS         |

Prepared By:

Win Huang

Win Huang

Project Engineer

Checked By:

Alan He

Alan He

Laboratory Manager

Approved By:

Alan He

Alan He

Laboratory Manager



## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2014, ANSI C63.26-2015, 971168 D01 Power Meas License Digital Systems v03r01, 971168 D02 Misc Rev Approve License Devices v02r01, 412172 D01 v01r01 Determining ERP and EIRP, CFR 47 FCC Part 2, Part 22 H, Part 24 E, Part 27 C, Part 90 S, RSS-130 Issue 2, RSS-132 Issue 4, RSS-133 Issue 7, RSS-139 Issue 4, RSS-Gen Issue 5.

## 3. FACILITIES AND ACCREDITATION

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Accreditation Certificate | <p><b>A2LA (Certificate No.: 6947.01)</b><br/>Guangdong Global Testing Technology Co., Ltd.<br/>has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1343)</b><br/>Guangdong Global Testing Technology Co., Ltd.<br/>has been recognized to perform compliance testing on equipment<br/>subject to Supplier's Declaration of Conformity (SDoC) and<br/>Certification rules</p> <p><b>ISED (Company No.: 30714)</b><br/>Guangdong Global Testing Technology Co., Ltd.<br/>has been registered and fully described in a report filed with ISED.<br/>The Company Number is 30714 and the test lab Conformity<br/>Assessment Body Identifier (CABID) is CN0148.</p> |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Note: All tests measurement facilities use to collect the measurement data are located at Room 101-105, 203-210, Building 1, No.2, Keji 8 Road, Songshan Lake Park, Dongguan city, Guangdong, People's Republic of China, 523808

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Test Items                                                                                                                                    | k | Uncertainty                                                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------|---|---------------------------------------------------------------------------------|
| Occupied Bandwidth                                                                                                                            | 2 | ±0.3 dB                                                                         |
| Effective (Isotropic) Radiated Power Output Data                                                                                              | 2 | ±0.3 dB                                                                         |
| Conducted Spurious Emission                                                                                                                   | 2 | 9 kHz-1 GHz: ± 0.2 dB<br>1GHz-12.75GHz: ± 0.3 dB<br>12.75 GHz-26.5 GHz: ± 0.5dB |
| Frequency Stability                                                                                                                           | 2 | ±9.0 PPM                                                                        |
| Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. |   |                                                                                 |

| Test Item                                                                                                                                     | Frequency Range  | k | U(dB) |
|-----------------------------------------------------------------------------------------------------------------------------------------------|------------------|---|-------|
| Conducted emissions from the AC mains power ports (AMN)                                                                                       | 150 kHz ~ 30 MHz | 2 | 3.37  |
| Radiated emissions                                                                                                                            | 9 kHz ~ 30 MHz   | 2 | 4.16  |
| Radiated emissions                                                                                                                            | 30 MHz ~ 1 GHz   | 2 | 3.79  |
| Radiated emissions                                                                                                                            | 1 GHz ~ 18 GHz   | 2 | 5.62  |
| Radiated emissions                                                                                                                            | 18 GHz ~ 40 GHz  | 2 | 5.54  |
| Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. |                  |   |       |

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

|                  |         |                            |
|------------------|---------|----------------------------|
| EUT Name         |         | Solar Luminaire Controller |
| Model            |         | 26-0015                    |
| Series Model     |         | /                          |
| Model Difference |         | /                          |
| Hardware Version |         | B                          |
| Software Version |         | 3                          |
| Ratings          |         | 0-50VDC, 0-7.5A            |
| Power Supply     | AC      | /                          |
|                  | DC      | 12V                        |
|                  | Battery | /                          |

| Antenna Gain | Mode              | Frequency (MHz) | Gain (dBi) |
|--------------|-------------------|-----------------|------------|
|              | NB-IoT Band 5     | 820             | 1.6        |
|              |                   | 830             | 1.6        |
|              |                   | 840             | 1.6        |
|              |                   | 850             | 1.6        |
|              | NB-IoT Band 2/25  | 1840            | 3.1        |
|              |                   | 1860            | 3.1        |
|              |                   | 1880            | 3.1        |
|              |                   | 1900            | 3.1        |
|              |                   | 1920            | 3.1        |
|              | NB-IoT Band 4     | 1700            | 4.2        |
|              |                   | 1720            | 4.2        |
|              |                   | 1740            | 4.2        |
|              |                   | 1760            | 4.2        |
|              | NB-IoT Band12/17  | 700             | -3.1       |
|              |                   | 710             | -3.1       |
|              |                   | 720             | -3.1       |
|              | NB-IoT Band 13    | 770             | 1.6        |
|              |                   | 780             | 1.6        |
|              |                   | 790             | 1.6        |
|              | NB-IoT Band 66    | 1700            | 4.2        |
|              |                   | 1720            | 4.2        |
|              |                   | 1740            | 4.2        |
|              |                   | 1760            | 4.2        |
|              |                   | 1780            | 4.2        |
|              | LTE eMTC Band 26  | 820             | 1.6        |
|              |                   | 830             | 1.6        |
|              |                   | 840             | 1.6        |
|              |                   | 850             | 1.6        |
|              | LTE eMTC Band2/25 | 1840            | 3.1        |
|              |                   | 1860            | 3.1        |
|              |                   | 1880            | 3.1        |

|                     |                                                                         |          |      |
|---------------------|-------------------------------------------------------------------------|----------|------|
|                     |                                                                         | 1900     | 3.1  |
|                     |                                                                         | 1920     | 3.1  |
|                     | LTE eMTC Band 4                                                         | 1700     | 4.2  |
|                     |                                                                         | 1720     | 4.2  |
|                     |                                                                         | 1740     | 4.2  |
|                     |                                                                         | 1760     | 4.2  |
|                     | LTE eMTC Band 12                                                        | 700      | -3.1 |
|                     |                                                                         | 710      | -3.1 |
|                     |                                                                         | 720      | -3.1 |
|                     | LTE eMTC Band 13                                                        | 770      | 1.6  |
|                     |                                                                         | 780      | 1.6  |
|                     |                                                                         | 790      | 1.6  |
|                     | LTE eMTC Band 66                                                        | 1700     | 4.2  |
|                     |                                                                         | 1720     | 4.2  |
|                     |                                                                         | 1740     | 4.2  |
|                     |                                                                         | 1760     | 4.2  |
|                     |                                                                         | 180      | 4.2  |
|                     | LTE eMTC Band 26                                                        | 810      | 1.6  |
|                     |                                                                         | 820      | 1.6  |
|                     | LTE eMTC Band 5                                                         | 820      | 1.6  |
|                     |                                                                         | 830      | 1.6  |
|                     |                                                                         | 840      | 1.6  |
|                     |                                                                         | 850      | 1.6  |
| Test Mode(s)        | NB-IoT Band 2/4/5/12/13/25/26/66,<br>LTE eMTC Band 2/4/5/12/13/25/26/66 |          |      |
| Test Modulation     | BPSK, QPSK, 16QAM                                                       |          |      |
| Category            | NB2, M1                                                                 |          |      |
| Deployment          | standalone, in-band, guard-band                                         |          |      |
| Sub-carrier spacing | 3.75KHz,15KHz                                                           |          |      |
| Ntones:             | single-tone, multi-tone                                                 |          |      |
| Maximum ERP/EIRP    | NB-IoT Band5                                                            | 23.12dBm |      |
|                     | NB-IoT Band 2:                                                          | 26.67dBm |      |
|                     | NB-IoT Band 25:                                                         | 26.76dBm |      |
|                     | NB-IoT Band 4                                                           | 28.17dBm |      |
|                     | NB-IoT Band 12                                                          | 18.24dBm |      |
|                     | NB-IoT Band 13                                                          | 23.07dBm |      |
|                     | NB-IoT Band 17                                                          | 18.24dBm |      |
|                     | NB-IoT Band 66                                                          | 28.17dBm |      |
|                     | LTE eMTC Band 26                                                        | 23.43dBm |      |
|                     | LTE eMTC Band 2                                                         | 27.03dBm |      |
|                     | LTE eMTC Band 25                                                        | 27.09dBm |      |
|                     | LTE eMTC Band 4                                                         | 28.19dBm |      |
|                     | LTE eMTC Band 12                                                        | 23.05dBm |      |

|                    |                                                                                                                                                                                                                                                                 |             |             |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------|
|                    | LTE eMTC Band 13                                                                                                                                                                                                                                                |             | 27.99dBm    |
|                    | LTE eMTC Band 66                                                                                                                                                                                                                                                |             | 28.19dBm    |
|                    | LTE eMTC Band 26                                                                                                                                                                                                                                                |             | 23.44dBm    |
|                    | LTE eMTC Band 5                                                                                                                                                                                                                                                 |             | 23.43dBm    |
| Frequency Range(s) | Band                                                                                                                                                                                                                                                            | TX (MHz)    | Rx (MHz)    |
|                    | NB-IoT Band5                                                                                                                                                                                                                                                    | 824~ 849    | 869~894     |
|                    | NB-IoT Band 2                                                                                                                                                                                                                                                   | 1850 ~ 1910 | 1930 ~ 1990 |
|                    | NB-IoT Band 25                                                                                                                                                                                                                                                  | 1850 ~ 1915 | 1930 ~ 1995 |
|                    | NB-IoT Band 4                                                                                                                                                                                                                                                   | 1710 ~ 1755 | 2110~ 2155  |
|                    | NB-IoT Band 12                                                                                                                                                                                                                                                  | 699 ~ 716   | 729~ 746    |
|                    | NB-IoT Band 13                                                                                                                                                                                                                                                  | 777~787     | 746 ~ 756   |
|                    | NB-IoT Band 17                                                                                                                                                                                                                                                  | 704~716     | 734~ 746    |
|                    | NB-IoT Band 66                                                                                                                                                                                                                                                  | 1710~1780   | 2110~2180   |
|                    | LTE eMTC Band 26                                                                                                                                                                                                                                                | 824~ 849    | 869~894     |
|                    | LTE eMTC Band 2                                                                                                                                                                                                                                                 | 1850 ~ 1910 | 1930 ~ 1990 |
|                    | LTE eMTC Band 25                                                                                                                                                                                                                                                | 1850 ~ 1915 | 1930 ~ 1995 |
|                    | LTE eMTC Band 4                                                                                                                                                                                                                                                 | 1710 ~ 1755 | 2110~ 2155  |
|                    | LTE eMTC Band 12                                                                                                                                                                                                                                                | 699 ~ 716   | 729~ 746    |
|                    | LTE eMTC Band 13                                                                                                                                                                                                                                                | 777~787     | 746 ~ 756   |
|                    | LTE eMTC Band 66                                                                                                                                                                                                                                                | 1710~1780   | 2110~2180   |
|                    | LTE eMTC Band 26                                                                                                                                                                                                                                                | 814~ 824    | 859~869     |
|                    | LTE eMTC Band 5                                                                                                                                                                                                                                                 | 824~ 849    | 869~894     |
| Antenna Type       | Integral Antenna                                                                                                                                                                                                                                                |             |             |
| Note               | 1. The Antenna Gain was provided by customer, and this information may affect the validity of the results, customer should be responsible for this.<br>2. The Tune Up Procedure is completely consistent with the settings applied during module certification. |             |             |

## 5.2. SUPPORT UNITS FOR SYSTEM TEST

The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | Series No. | Note        |
|------|-----------|-----------|----------------|------------|-------------|
| E-1  | SIN Card  | N/A       | N/A            | N/A        | GTG Support |
| E-2  | DC power  | N/A       | N/A            | N/A        | GTG Support |
| E-3  | Antenna   | N/A       | N/A            | N/A        | GTG Support |

The following cables were used to form a representative test configuration during the tests.


| Item | Type of cable | Shielded Type | Ferrite Core    | Length |
|------|---------------|---------------|-----------------|--------|
| C-1  | DC cable      | Unshielded    | without ferrite | 1.5 m  |

---

|     |          |            |                 |       |
|-----|----------|------------|-----------------|-------|
| C-2 | DC cable | Unshielded | without ferrite | 0.6 m |
|-----|----------|------------|-----------------|-------|

### 5.3. SETUP DIAGRAM

Radiated Emission:



## 6. MEASURING INSTRUMENT AND SOFTWARE USED

| Test Equipment of Radiated emissions below 1GHz |                 |                         |            |            |            |
|-------------------------------------------------|-----------------|-------------------------|------------|------------|------------|
| Equipment                                       | Manufacturer    | Model No.               | Serial No. | Last Cal.  | Due Date   |
| 3m Semi-anechoic Chamber                        | ETS             | 9m*6m*6m                | Q2146      | 2025/08/23 | 2026/08/22 |
| EMI Test Receiver                               | Rohde & Schwarz | ESCI3                   | 101144     | 2025/08/23 | 2026/08/22 |
| Pre-Amplifier                                   | HzEMC           | HPA-9K0130              | HYP A21001 | 2025/08/23 | 2026/08/22 |
| Biconilog Antenna                               | Schwarzbeck     | VULB 9168               | 01315      | 2022/10/10 | 2025/10/09 |
| Biconilog Antenna                               | ETS             | 3142E                   | 00243651   | 2025/02/22 | 2028/02/21 |
| Loop Antenna                                    | ETS             | 6502                    | 00243668   | 2025/02/22 | 2028/02/21 |
| Wideband Radio Communication Tester             | Rohde & Schwarz | CMW500                  | 103235     | 2025/08/25 | 2026/08/24 |
| RF Cable                                        | TIMES Microwave | LMR240UF-NMNM-14M       | N/A        | 2025/08/23 | 2026/08/22 |
| RF Cable                                        | TIMES Microwave | HF205-NMNM-11.00M       | N/A        | 2025/08/23 | 2026/08/22 |
| RF Cable                                        | JCT             | JCT-06S-NJ-NJ-2.5M      | N/A        | 2025/08/23 | 2026/08/22 |
| Test Software                                   | Farad           | EZ-EMC (Ver.FA-03A2 RE) | N/A        | N/A        | N/A        |

| Test Equipment of Radiated emissions above 1GHz |                 |                          |             |            |            |
|-------------------------------------------------|-----------------|--------------------------|-------------|------------|------------|
| Equipment                                       | Manufacturer    | Model No.                | Serial No.  | Last Cal.  | Due Date   |
| 3m Semi-anechoic Chamber                        | ETS             | 9m*6m*6m                 | Q2149       | 2025/08/23 | 2026/08/22 |
| Spectrum Analyzer                               | Rohde & Schwarz | FSV40                    | 101413      | 2025/08/23 | 2026/08/22 |
| Pre-Amplifier                                   | HzEMC           | HPA-1G1850               | HYP A21003  | 2025/08/23 | 2026/08/22 |
| Horn antenna                                    | ETS             | 3117                     | 00246069    | 2025/02/22 | 2028/02/21 |
| Pre-Amplifier                                   | HzEMC           | HPA-184057               | HYP A21004  | 2025/08/23 | 2026/08/22 |
| Horn antenna                                    | ETS             | 3116C                    | 00246265    | 2025/02/22 | 2028/02/21 |
| RF Filter Bank                                  | HzEMC           | HSW-F18                  | HSWF2218E01 | 2025/08/23 | 2026/08/22 |
| RF Filter Bank                                  | HzEMC           | HPF18                    | HPF2218E02  | 2025/08/23 | 2026/08/22 |
| Wideband Radio Communication Tester             | Rohde & Schwarz | CMW500                   | 103235      | 2025/08/25 | 2026/08/24 |
| RF Cable                                        | TIMES Microwave | HF205-NMNM-7.00M         | N/A         | 2025/08/23 | 2026/08/22 |
| RF Cable                                        | TIMES Microwave | HF205-NMNM-2.50M         | N/A         | 2025/08/23 | 2026/08/22 |
| Test Software                                   | Farad           | EZ-EMC (Ver.FA-03A2 RE+) | N/A         | N/A        | N/A        |

## 7. Test Case Results

### 7.1. Power Output and Effective Radiated Power

#### RULE PART(S)

FCC: §2.1046, §22.913(a)(5), §24.232(c), §27.50(d)(4), §27.50(b)(10), §27.50(c)(10), §90.635(b)

ISED: RSS-130: 4.6, RSS-132: 5.4, RSS-133: 6.4, RSS-139: 6.5

#### LIMITS

Rule Part 22.913(a)(5) specifies that "Mobile/portable stations are limited to 7 watts( $\leq 38.45$  dBm) ERP".

Rule Part 24.232(c) Mobile and portable stations are limited to 2 watts( $\leq 33$  dBm) EIRP.

Rule Part 24.232(e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an mms-equivalent voltage.

Rule Part 27.50(b)(10) specifies that "Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts( $\leq 34.77$  dBm) ERP".

Rule Part 27.50(c)(10) specifies that "Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts( $\leq 34.77$  dBm) ERP".

Rule Part 27.50(d)(4) specifies that "Fixed, mobile and portable (hand-held) stations operating in the 1710-1755 MHz band are limited to 1 watts( $\leq 30$  dBm) EIRP".

Part 90.635 (b) the maximum output power of the transmitter for mobile stations is 100 watts( $\leq 50$  dBm).

Rule Part 90.635 (b) specifies that "The maximum output power of the transmitter for mobile stations is 100 watts( $\leq 50$  dBm).

Rule RSS-130(4.6.2) specifies that "For Frequency bands 617-652 MHz and 663-698 MHz. The e.r.p. shall not exceed 3 watts( $\leq 34.7$  dBm) for mobile equipment, fixed subscriber equipment and portable equipment."

Rule RSS-130(4.6.3) specifies that "For Frequency bands 698-756 MHz and 777-787 MHz. The e.r.p. shall not exceed 30 watts( $\leq 44.7$  dBm) for mobile equipment and outdoor fixed subscriber equipment. The e.r.p. shall not exceed 3 watts( $\leq 34.7$  dBm) for portable equipment and indoor fixed subscriber equipment."


Rule RSS-139(6.5) specifies that "The equivalent isotropically radiated power (e.i.r.p.) for mobile and portable transmitters shall not exceed one watt( $\leq 30$  dBm)."

Rule RSS 132 5.4 specifies that "The transmitter output power shall be measured in terms of average power. The equivalent isotropically radiated power (e.i.r.p.) for mobile equipment shall not exceed 11.5 watts( $\leq 40.6$  dBm)."

Rule RSS-133 6.4 specifies that " Mobile stations and hand-held portables are limited to 2 watts( $\leq 33$  dBm) maximum e.i.r.p. The equipment shall employ means to limit the power to the minimum necessary for successful communication"

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

### **TEST SETUP**

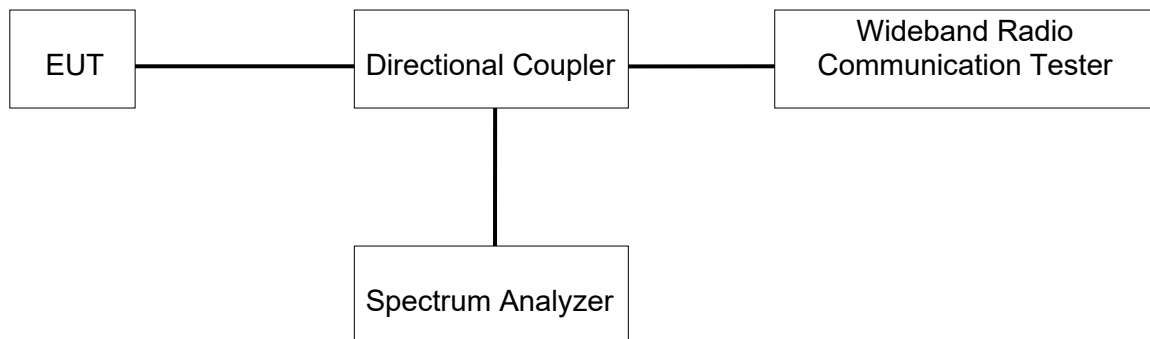

### **TEST PROCEDURE**

Refer to ANSI C63.26:2015 and KDB 971168 D01 Power Meas License Digital Systems vO3r01

$$\text{ERP/ EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where:

ERP or EIRP = effective or equivalent isotropically radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB

The transmitter has a maximum radiated ERP / EIRP output powers as follows:

### **TEST ENVIRONMENT**

|                     |        |                   |     |
|---------------------|--------|-------------------|-----|
| Temperature         | 21.8°C | Relative Humidity | 53% |
| Atmosphere Pressure | 101kPa |                   |     |

**RESULTS**

| Mode          | Modulation | Sub-carrier spacing (KHz) | Ntones | Maximum output Power (dBm) for low/mid/high channel |              |              | ERP (dBm)    |              |              |
|---------------|------------|---------------------------|--------|-----------------------------------------------------|--------------|--------------|--------------|--------------|--------------|
|               |            |                           |        | 20402 /824.2                                        | 20525 /836.5 | 20648 /848.8 | 20402 /824.2 | 20525 /836.5 | 20648 /848.8 |
| NB-IoT Band 5 | BPSK       | 3.75                      | 1@0    | 23.14                                               | 23.30        | 23.39        | 22.59        | 22.75        | 22.84        |
|               |            |                           | 1@47   | 23.07                                               | 23.24        | 23.37        | 22.52        | 22.69        | 22.82        |
|               |            | 15                        | 1@0    | 23.67                                               | 23.67        | 23.61        | 23.12        | 23.12        | 23.06        |
|               |            |                           | 1@11   | 23.62                                               | 23.59        | 23.57        | 23.07        | 23.04        | 23.02        |
|               | QPSK       | 3.75                      | 1@0    | 23.14                                               | 23.25        | 23.40        | 22.59        | 22.70        | 22.85        |
|               |            |                           | 1@47   | 23.09                                               | 23.21        | 23.39        | 22.54        | 22.66        | 22.84        |
|               |            | 15                        | 1@0    | 23.47                                               | 23.57        | 23.45        | 22.92        | 23.02        | 22.90        |
|               |            |                           | 1@11   | 23.64                                               | 23.61        | 23.47        | 23.09        | 23.06        | 22.92        |
|               |            | 15                        | 12@0   | 21.20                                               | 21.18        | 21.17        | 20.65        | 20.63        | 20.62        |
|               |            |                           |        |                                                     |              |              |              |              |              |

| Mode          | Modulation | Sub-carrier spacing (KHz) | Ntones | Maximum Output Power (dBm) for low/middle/high channel |                  |                  | EIRP (dBm)       |                  |                  |
|---------------|------------|---------------------------|--------|--------------------------------------------------------|------------------|------------------|------------------|------------------|------------------|
|               |            |                           |        | 18602 /1850.2MHz                                       | 18900 /1880.0MHz | 19198 /1909.8MHz | 18602 /1850.2MHz | 18900 /1880.0MHz | 19198 /1909.8MHz |
| NB-IoT Band 2 | BPSK       | 3.75                      | 1@0    | 23.28                                                  | 23.19            | 23.10            | 26.38            | 26.29            | 26.20            |
|               |            |                           | 1@47   | 23.26                                                  | 23.25            | 23.08            | 26.36            | 26.35            | 26.18            |
|               |            | 15                        | 1@0    | 23.43                                                  | 23.47            | 23.45            | 26.53            | 26.57            | 26.55            |
|               |            |                           | 1@11   | 23.45                                                  | 23.38            | 23.35            | 26.55            | 26.48            | 26.45            |
|               | QPSK       | 3.75                      | 1@0    | 23.27                                                  | 23.20            | 23.11            | 26.37            | 26.30            | 26.21            |
|               |            |                           | 1@47   | 23.26                                                  | 23.24            | 23.14            | 26.36            | 26.34            | 26.24            |
|               |            | 15                        | 1@0    | 23.57                                                  | 23.38            | 23.42            | 26.67            | 26.48            | 26.52            |
|               |            |                           | 1@11   | 23.42                                                  | 23.47            | 23.41            | 26.52            | 26.57            | 26.51            |
|               |            | 15                        | 12@0   | 21.09                                                  | 21.03            | 21.02            | 24.19            | 24.13            | 24.12            |
|               |            |                           |        |                                                        |                  |                  |                  |                  |                  |

| Mode           | Modulation | Sub-carrier spacing (KHz) | Ntones | Maximum Output Power (dBm) for low/middle/high channel |                  |                  | EIRP (dBm)       |                  |                  |
|----------------|------------|---------------------------|--------|--------------------------------------------------------|------------------|------------------|------------------|------------------|------------------|
|                |            |                           |        | 26042 /1850.2MHz                                       | 26365 /1882.5MHz | 26688 /1914.8MHz | 26042 /1850.2MHz | 26365 /1882.5MHz | 26688 /1914.8MHz |
| NB-IoT Band 25 | BPSK       | 3.75                      | 1@0    | 23.31                                                  | 23.18            | 23.13            | 26.41            | 26.28            | 26.23            |
|                |            |                           | 1@47   | 23.30                                                  | 23.16            | 23.11            | 26.40            | 26.26            | 26.21            |
|                |            | 15                        | 1@0    | 23.66                                                  | 23.51            | 23.55            | 26.76            | 26.61            | 26.65            |
|                |            |                           | 1@11   | 23.61                                                  | 23.46            | 23.47            | 26.71            | 26.56            | 26.57            |
|                | QPSK       | 3.75                      | 1@0    | 23.31                                                  | 21.20            | 23.12            | 26.41            | 24.30            | 26.22            |
|                |            |                           | 1@47   | 23.27                                                  | 23.20            | 23.11            | 26.37            | 26.30            | 26.21            |
|                |            | 15                        | 1@0    | 23.59                                                  | 23.42            | 23.54            | 26.69            | 26.52            | 26.64            |
|                |            |                           | 1@11   | 23.54                                                  | 23.48            | 23.59            | 26.64            | 26.58            | 26.69            |
|                |            | 15                        | 12@0   | 21.13                                                  | 21.12            | 21.09            | 24.23            | 24.22            | 24.19            |

| Mode          | Modulation | Sub-carrier spacing (KHz) | Ntones | Maximum Output Power (dBm) for low/middle/high channel |                   |                   | EIRP (dBm)       |                   |                   |
|---------------|------------|---------------------------|--------|--------------------------------------------------------|-------------------|-------------------|------------------|-------------------|-------------------|
|               |            |                           |        | 19952/ 1710.2MHz                                       | 20175/ 1732.5 MHz | 20398/ 1754.8 MHz | 19952/ 1710.2MHz | 20175/ 1732.5 MHz | 20398/ 1754.8 MHz |
| NB-IoT Band 4 | BPSK       | 3.75                      | 1@0    | 23.94                                                  | 23.65             | 23.44             | 28.14            | 27.85             | 27.64             |
|               |            |                           | 1@47   | 23.93                                                  | 23.62             | 23.37             | 28.13            | 27.82             | 27.57             |
|               |            | 15                        | 1@0    | 23.85                                                  | 23.73             | 23.59             | 28.05            | 27.93             | 27.79             |
|               |            |                           | 1@11   | 23.87                                                  | 23.62             | 23.60             | 28.07            | 27.82             | 27.80             |
|               | QPSK       | 3.75                      | 1@0    | 23.95                                                  | 23.67             | 23.40             | 28.15            | 27.87             | 27.60             |
|               |            |                           | 1@47   | 23.97                                                  | 23.61             | 23.38             | 28.17            | 27.81             | 27.58             |
|               |            | 15                        | 1@0    | 23.87                                                  | 23.70             | 23.57             | 28.07            | 27.90             | 27.77             |
|               |            |                           | 1@11   | 23.94                                                  | 23.77             | 23.61             | 28.14            | 27.97             | 27.81             |
|               |            | 15                        | 12@0   | 21.24                                                  | 21.31             | 21.23             | 25.44            | 25.51             | 25.43             |

| Mode              | Modulation | Sub-carrier spacing (KHz) | Ntones | Maximum Output Power (dBm) for low/middle/high channel |                     |                     | ERP (dBm)           |                     |                     |
|-------------------|------------|---------------------------|--------|--------------------------------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
|                   |            |                           |        | 23012/<br>699.2 MHz                                    | 23095/<br>707.5 MHz | 23178/<br>715.8 MHz | 23012/<br>699.2 MHz | 23095/<br>707.5 MHz | 23178/<br>715.8 MHz |
| NB-IoT<br>Band 12 | BPSK       | 3.75                      | 1@0    | 23.08                                                  | 23.17               | 23.32               | 17.83               | 17.92               | 18.07               |
|                   |            |                           | 1@47   | 23.04                                                  | 23.18               | 23.34               | 17.79               | 17.93               | 18.09               |
|                   |            | 15                        | 1@0    | 23.36                                                  | 23.45               | 23.42               | 18.11               | 18.20               | 18.17               |
|                   |            |                           | 1@11   | 23.29                                                  | 23.32               | 23.35               | 18.04               | 18.07               | 18.10               |
|                   | QPSK       | 3.75                      | 1@0    | 23.07                                                  | 23.21               | 23.36               | 17.82               | 17.96               | 18.11               |
|                   |            |                           | 1@47   | 23.03                                                  | 23.23               | 23.32               | 17.78               | 17.98               | 18.07               |
|                   |            | 15                        | 1@0    | 23.25                                                  | 23.36               | 23.34               | 18.00               | 18.11               | 18.09               |
|                   |            |                           | 1@11   | 23.31                                                  | 23.47               | 23.49               | 18.06               | 18.22               | 18.24               |
|                   |            | 15                        | 12@0   | 21.21                                                  | 21.24               | 21.26               | 15.96               | 15.99               | 16.01               |
|                   |            |                           |        |                                                        |                     |                     |                     |                     |                     |

| Mode              | Modulation | Sub-carrier spacing (KHz) | Ntones | Maximum Output Power (dBm) for low/middle/high channel |                  |                     | ERP (dBm)           |                  |                     |
|-------------------|------------|---------------------------|--------|--------------------------------------------------------|------------------|---------------------|---------------------|------------------|---------------------|
|                   |            |                           |        | 23182/<br>777.2 MHz                                    | 23230/<br>782MHz | 23278/<br>786.8 MHz | 23182/<br>777.2 MHz | 23230/<br>782MHz | 23278/<br>786.8 MHz |
| NB-IoT<br>Band 13 | BPSK       | 3.75                      | 1@0    | 23.16                                                  | 23.19            | 23.16               | 22.61               | 22.64            | 22.61               |
|                   |            |                           | 1@47   | 23.15                                                  | 23.12            | 23.12               | 22.60               | 22.57            | 22.57               |
|                   |            | 15                        | 1@0    | 23.52                                                  | 23.57            | 23.47               | 22.97               | 23.02            | 22.92               |
|                   |            |                           | 1@11   | 23.41                                                  | 23.42            | 23.50               | 22.86               | 22.87            | 22.95               |
|                   | QPSK       | 3.75                      | 1@0    | 23.18                                                  | 23.13            | 23.12               | 22.63               | 22.58            | 22.57               |
|                   |            |                           | 1@47   | 23.17                                                  | 23.14            | 23.08               | 22.62               | 22.59            | 22.53               |
|                   |            | 15                        | 1@0    | 23.32                                                  | 23.42            | 23.54               | 22.77               | 22.87            | 22.99               |
|                   |            |                           | 1@11   | 23.51                                                  | 23.56            | 23.62               | 22.96               | 23.01            | 23.07               |
|                   |            | 15                        | 12@0   | 21.21                                                  | 21.20            | 21.26               | 20.66               | 20.65            | 20.71               |
|                   |            |                           |        |                                                        |                  |                     |                     |                  |                     |

| Mode              | Modulation | Sub-carrier spacing (KHz) | Ntones | Maximum Output Power (dBm) for low/middle/high channel |                   |                     | ERP (dBm)           |                   |                     |
|-------------------|------------|---------------------------|--------|--------------------------------------------------------|-------------------|---------------------|---------------------|-------------------|---------------------|
|                   |            |                           |        | 23732/<br>704.2 MHz                                    | 23790/<br>710 MHz | 23848/<br>715.8 MHz | 23732/<br>704.2 MHz | 23790/<br>710 MHz | 23848/<br>715.8 MHz |
| NB-IoT<br>Band 17 | BPSK       | 3.75                      | 1@0    | 23.27                                                  | 23.28             | 23.38               | 18.02               | 18.03             | 18.13               |
|                   |            |                           | 1@47   | 23.18                                                  | 23.24             | 23.33               | 17.93               | 17.99             | 18.08               |
|                   |            | 15                        | 1@0    | 23.40                                                  | 23.42             | 23.45               | 18.15               | 18.17             | 18.20               |
|                   |            |                           | 1@11   | 23.34                                                  | 23.29             | 23.34               | 18.09               | 18.04             | 18.09               |
|                   | QPSK       | 3.75                      | 1@0    | 23.22                                                  | 23.21             | 23.31               | 17.97               | 17.96             | 18.06               |
|                   |            |                           | 1@47   | 23.20                                                  | 23.20             | 23.32               | 17.95               | 17.95             | 18.07               |
|                   |            | 15                        | 1@0    | 23.47                                                  | 23.46             | 23.49               | 18.22               | 18.21             | 18.24               |
|                   |            |                           | 1@11   | 23.38                                                  | 23.43             | 23.43               | 18.13               | 18.18             | 18.18               |
|                   |            | 15                        | 12@0   | 21.26                                                  | 21.25             | 21.25               | 16.01               | 16.00             | 16.00               |

| Mode              | Modulation | Sub-carrier spacing (KHz) | Ntones | Maximum Output Power (dBm) for low/middle/high channel |                     |                       | EIRP (dBm)            |                     |                       |
|-------------------|------------|---------------------------|--------|--------------------------------------------------------|---------------------|-----------------------|-----------------------|---------------------|-----------------------|
|                   |            |                           |        | 131974/<br>1710.2 MHz                                  | 132322/<br>1745 MHz | 132670/<br>1779.8 MHz | 131974/<br>1710.2 MHz | 132322/<br>1745 MHz | 132670/<br>1779.8 MHz |
| NB-IoT<br>Band 66 | BPSK       | 3.75                      | 1@0    | 23.96                                                  | 23.55               | 23.29                 | 28.16                 | 27.75               | 27.49                 |
|                   |            |                           | 1@47   | 23.95                                                  | 23.52               | 23.28                 | 28.15                 | 27.72               | 27.48                 |
|                   |            | 15                        | 1@0    | 23.92                                                  | 23.74               | 23.71                 | 28.12                 | 27.94               | 27.91                 |
|                   |            |                           | 1@11   | 23.91                                                  | 23.68               | 23.69                 | 28.11                 | 27.88               | 27.89                 |
|                   | QPSK       | 3.75                      | 1@0    | 23.97                                                  | 23.56               | 23.26                 | 28.17                 | 27.76               | 27.46                 |
|                   |            |                           | 1@47   | 23.96                                                  | 23.51               | 23.25                 | 28.16                 | 27.71               | 27.45                 |
|                   |            | 15                        | 1@0    | 23.92                                                  | 23.72               | 23.70                 | 28.12                 | 27.92               | 27.90                 |
|                   |            |                           | 1@11   | 23.85                                                  | 23.82               | 23.73                 | 28.05                 | 28.02               | 27.93                 |
|                   |            | 15                        | 12@0   | 21.29                                                  | 21.31               | 21.26                 | 25.49                 | 25.51               | 25.46                 |

| LTE eMTC<br>Band 26 | Channel/<br>Frequency(MHz) | Index | RB#<br>RB start |       | Maximum Output<br>Power (dBm) |       | ERP (dBm) |       |
|---------------------|----------------------------|-------|-----------------|-------|-------------------------------|-------|-----------|-------|
|                     |                            |       | QPSK            | 16QAM | QPSK                          | 16QAM | QPSK      | 16QAM |
| 1.4MHz              | 26797/824.7                | 0     | 1#0             | 1#0   | 23.73                         | 22.98 | 23.18     | 22.43 |
|                     |                            | 0     | 6#0             | 5#0   | 22.52                         | 22.08 | 21.97     | 21.53 |
|                     | 26915/836.5                | 0     | 1#0             | 1#0   | 23.87                         | 22.73 | 23.32     | 22.18 |
|                     |                            | 0     | 6#0             | 5#0   | 23.56                         | 22.07 | 23.01     | 21.52 |
|                     | 27033/848.3                | 0     | 1#5             | 1#5   | 23.83                         | 22.78 | 23.28     | 22.23 |
|                     |                            | 0     | 6#0             | 5#0   | 22.42                         | 21.95 | 21.87     | 21.40 |
| 3MHz                | 26805/825.5                | 0     | 1#0             | 1#0   | 23.52                         | 23.27 | 22.97     | 22.72 |
|                     |                            | 0     | 6#0             | 5#0   | 22.36                         | 22.09 | 21.81     | 21.54 |
|                     | 26915/836.5                | 0     | 1#0             | 1#0   | 23.62                         | 23.17 | 23.07     | 22.62 |
|                     |                            | 0     | 6#0             | 5#0   | 22.35                         | 22.10 | 21.80     | 21.55 |
|                     | 27025/847.5                | 1     | 1#5             | 1#5   | 23.70                         | 23.09 | 23.15     | 22.54 |
|                     |                            | 0     | 6#0             | 5#0   | 22.20                         | 21.95 | 21.65     | 21.40 |
| 5MHz                | 26815/826.5                | 3     | 1#0             | 1#0   | 22.77                         | 23.24 | 22.22     | 22.69 |
|                     |                            | 0     | 6#0             | 5#0   | 23.39                         | 22.03 | 22.84     | 21.48 |
|                     | 26915/836.5                | 0     | 1#0             | 1#0   | 23.98                         | 23.45 | 23.43     | 22.90 |
|                     |                            | 0     | 6#0             | 5#0   | 23.33                         | 22.04 | 22.78     | 21.49 |
|                     | 27015/846.5                | 0     | 1#5             | 1#5   | 23.66                         | 23.05 | 23.11     | 22.50 |
|                     |                            | 0     | 6#0             | 5#0   | 23.19                         | 21.94 | 22.64     | 21.39 |
| 10MHz               | 26840/829                  | 3     | 1#0             | 1#0   | 22.78                         | 23.26 | 22.23     | 22.71 |
|                     |                            | 0     | 4#0             | 4#0   | 23.12                         | 23.18 | 22.57     | 22.63 |
|                     | 26915/836.5                | 0     | 1#0             | 1#0   | 23.11                         | 23.97 | 22.56     | 23.42 |
|                     |                            | 0     | 4#0             | 4#0   | 23.32                         | 23.15 | 22.77     | 22.60 |
|                     | 26990/844                  | 4     | 1#5             | 1#5   | 23.72                         | 23.05 | 23.17     | 22.50 |
|                     |                            | 7     | 4#2             | 4#2   | 23.80                         | 22.22 | 23.25     | 21.67 |
| 15MHz               | 26865/831.5                | 3     | 1#0             | 1#0   | 22.76                         | 23.21 | 22.21     | 22.66 |
|                     |                            | 0     | 6#0             | 5#0   | 23.97                         | 22.91 | 23.42     | 22.36 |
|                     | 26915/836.5                | 0     | 1#0             | 1#0   | 23.69                         | 23.21 | 23.14     | 22.66 |
|                     |                            | 0     | 6#0             | 5#0   | 23.89                         | 22.88 | 23.34     | 22.33 |
|                     | 26965/841.5                | 8     | 1#5             | 1#5   | 23.56                         | 23.02 | 23.01     | 22.47 |
|                     |                            | 11    | 6#0             | 5#0   | 23.81                         | 23.96 | 23.26     | 23.41 |

| LTE<br>eMTC<br>Band 2 | Channel/<br>Frequency(MHz) | Index | RB#<br>RBstart |       | Maximum Output<br>Power (dBm) |       | EIRP (dBm) |       |
|-----------------------|----------------------------|-------|----------------|-------|-------------------------------|-------|------------|-------|
|                       |                            |       | QPSK           | 16QAM | QPSK                          | 16QAM | QPSK       | 16QAM |
| 1.4MHz                | 18607/1850.7               | 0     | 1#0            | 1#0   | 23.50                         | 22.63 | 26.60      | 25.73 |
|                       |                            | 0     | 6#0            | 5#0   | 22.57                         | 22.18 | 25.67      | 25.28 |
|                       | 18900/1880                 | 0     | 1#0            | 1#0   | 23.88                         | 22.35 | 26.98      | 25.45 |
|                       |                            | 0     | 6#0            | 5#0   | 23.39                         | 21.91 | 26.49      | 25.01 |
|                       | 19193/1909.3               | 0     | 1#5            | 1#5   | 23.78                         | 22.46 | 26.88      | 25.56 |
|                       |                            | 0     | 6#0            | 5#0   | 22.16                         | 21.88 | 25.26      | 24.98 |
| 3MHz                  | 18615/1851.5               | 0     | 1#0            | 1#0   | 23.40                         | 22.77 | 26.50      | 25.87 |
|                       |                            | 0     | 6#0            | 5#0   | 22.34                         | 22.15 | 25.44      | 25.25 |
|                       | 18900/1880                 | 0     | 1#0            | 1#0   | 23.34                         | 22.74 | 26.44      | 25.84 |
|                       |                            | 0     | 6#0            | 5#0   | 22.11                         | 21.94 | 25.21      | 25.04 |
|                       | 19185/1908.5               | 1     | 1#5            | 1#5   | 23.91                         | 22.57 | 27.01      | 25.67 |
|                       |                            | 0     | 6#0            | 5#0   | 21.90                         | 22.06 | 25.00      | 25.16 |
| 5MHz                  | 18625/1852.5               | 3     | 1#0            | 1#0   | 23.86                         | 23.80 | 26.96      | 26.90 |
|                       |                            | 0     | 6#0            | 5#0   | 23.24                         | 21.88 | 26.34      | 24.98 |
|                       | 18900/1880                 | 0     | 1#0            | 1#0   | 23.31                         | 23.93 | 26.41      | 27.03 |
|                       |                            | 0     | 6#0            | 5#0   | 23.15                         | 21.91 | 26.25      | 25.01 |
|                       | 19175/1907.5               | 0     | 1#5            | 1#5   | 23.68                         | 23.56 | 26.78      | 26.66 |
|                       |                            | 0     | 6#0            | 5#0   | 22.93                         | 21.54 | 26.03      | 24.64 |
| 10MHz                 | 18650/1855                 | 3     | 1#0            | 1#0   | 23.83                         | 23.86 | 26.93      | 26.96 |
|                       |                            | 0     | 4#0            | 4#0   | 23.81                         | 22.89 | 26.91      | 25.99 |
|                       | 18900/1880                 | 0     | 1#0            | 1#0   | 23.91                         | 23.60 | 27.01      | 26.70 |
|                       |                            | 0     | 4#0            | 4#0   | 23.02                         | 22.95 | 26.12      | 26.05 |
|                       | 19150/1905                 | 4     | 1#5            | 1#5   | 23.69                         | 23.60 | 26.79      | 26.70 |
|                       |                            | 7     | 4#2            | 4#2   | 23.44                         | 21.64 | 26.54      | 24.74 |
| 15MHz                 | 18675/1857.5               | 3     | 1#0            | 1#0   | 23.81                         | 23.82 | 26.91      | 26.92 |
|                       |                            | 0     | 6#0            | 5#0   | 23.65                         | 23.83 | 26.75      | 26.93 |
|                       | 18900/1880                 | 0     | 1#0            | 1#0   | 23.88                         | 23.65 | 26.98      | 26.75 |
|                       |                            | 0     | 6#0            | 5#0   | 23.54                         | 23.77 | 26.64      | 26.87 |
|                       | 19125/1902.5               | 8     | 1#5            | 1#5   | 23.69                         | 23.60 | 26.79      | 26.70 |
|                       |                            | 11    | 6#0            | 5#0   | 23.93                         | 23.55 | 27.03      | 26.65 |
| 20MHz                 | 18700/1860                 | 3     | 1#0            | 1#0   | 23.85                         | 23.82 | 26.95      | 26.92 |
|                       |                            | 0     | 6#0            | 5#0   | 23.58                         | 23.81 | 26.68      | 26.91 |
|                       | 18900/1880                 | 0     | 1#0            | 1#0   | 23.89                         | 23.71 | 26.99      | 26.81 |
|                       |                            | 0     | 6#0            | 5#0   | 23.58                         | 23.85 | 26.68      | 26.95 |
|                       | 19100/1900                 | 12    | 1#5            | 1#5   | 23.68                         | 23.59 | 26.78      | 26.69 |
|                       |                            | 15    | 6#0            | 5#0   | 23.65                         | 23.56 | 26.75      | 26.66 |

| LTE eMTC<br>Band 25 | Channel/<br>Frequency(MHz) | Index | RB#<br>RBstart |       | Maximum Output<br>Power (dBm) |       | EIRP (dBm) |       |
|---------------------|----------------------------|-------|----------------|-------|-------------------------------|-------|------------|-------|
|                     |                            |       | QPSK           | 16QAM | QPSK                          | 16QAM | QPSK       | 16QAM |
| 1.4MHz              | 26047/1850.7               | 0     | 1#0            | 1#0   | 23.84                         | 22.68 | 26.94      | 25.78 |
|                     |                            | 0     | 6#0            | 5#0   | 23.15                         | 22.02 | 26.25      | 25.12 |
|                     | 26365/1882.5               | 0     | 1#0            | 1#0   | 23.65                         | 22.52 | 26.75      | 25.62 |
|                     |                            | 0     | 6#0            | 5#0   | 23.23                         | 21.77 | 26.33      | 24.87 |
|                     | 26683/1914.3               | 0     | 1#5            | 1#5   | 23.60                         | 22.25 | 26.70      | 25.35 |
|                     |                            | 0     | 6#0            | 5#0   | 22.02                         | 21.59 | 25.12      | 24.69 |
| 3MHz                | 26055/1851.5               | 0     | 1#0            | 1#0   | 23.99                         | 23.04 | 27.09      | 26.14 |
|                     |                            | 0     | 6#0            | 5#0   | 22.25                         | 22.00 | 25.35      | 25.10 |
|                     | 26365/1882.5               | 0     | 1#0            | 1#0   | 23.71                         | 22.72 | 26.81      | 25.82 |
|                     |                            | 0     | 6#0            | 5#0   | 21.90                         | 21.75 | 25.00      | 24.85 |
|                     | 26675/1913.5               | 1     | 1#5            | 1#5   | 23.74                         | 22.65 | 26.84      | 25.75 |
|                     |                            | 0     | 6#0            | 5#0   | 21.93                         | 21.71 | 25.03      | 24.81 |
| 5MHz                | 26065/1852.5               | 3     | 1#0            | 1#0   | 23.88                         | 23.84 | 26.98      | 26.94 |
|                     |                            | 0     | 6#0            | 5#0   | 23.23                         | 21.91 | 26.33      | 25.01 |
|                     | 26365/1882.5               | 0     | 1#0            | 1#0   | 23.68                         | 23.71 | 26.78      | 26.81 |
|                     |                            | 0     | 6#0            | 5#0   | 22.85                         | 21.70 | 25.95      | 24.80 |
|                     | 26665/1912.5               | 0     | 1#5            | 1#5   | 23.69                         | 23.58 | 26.79      | 26.68 |
|                     |                            | 0     | 6#0            | 5#0   | 22.92                         | 21.62 | 26.02      | 24.72 |
| 10MHz               | 26090/1855                 | 3     | 1#0            | 1#0   | 23.88                         | 23.86 | 26.98      | 26.96 |
|                     |                            | 0     | 4#0            | 4#0   | 23.74                         | 22.93 | 26.84      | 26.03 |
|                     | 26365/1882.5               | 0     | 1#0            | 1#0   | 23.57                         | 23.71 | 26.67      | 26.81 |
|                     |                            | 0     | 4#0            | 4#0   | 23.91                         | 22.95 | 27.01      | 26.05 |
|                     | 26640/1910                 | 4     | 1#5            | 1#5   | 23.63                         | 23.56 | 26.73      | 26.66 |
|                     |                            | 7     | 4#2            | 4#2   | 23.46                         | 21.56 | 26.56      | 24.66 |
| 15MHz               | 26115/1857.5               | 3     | 1#0            | 1#0   | 23.87                         | 23.86 | 26.97      | 26.96 |
|                     |                            | 0     | 6#0            | 5#0   | 23.95                         | 23.88 | 27.05      | 26.98 |
|                     | 26365/1882.5               | 0     | 1#0            | 1#0   | 23.75                         | 23.71 | 26.85      | 26.81 |
|                     |                            | 0     | 6#0            | 5#0   | 23.90                         | 23.79 | 27.00      | 26.89 |
|                     | 26615/1907.5               | 8     | 1#5            | 1#5   | 23.71                         | 23.56 | 26.81      | 26.66 |
|                     |                            | 11    | 6#0            | 5#0   | 23.95                         | 23.63 | 27.05      | 26.73 |
| 20MHz               | 26140/1860                 | 3     | 1#0            | 1#0   | 23.90                         | 23.86 | 27.00      | 26.96 |
|                     |                            | 0     | 6#0            | 5#0   | 23.63                         | 23.84 | 26.73      | 26.94 |
|                     | 26365/1882.5               | 0     | 1#0            | 1#0   | 23.77                         | 23.58 | 26.87      | 26.68 |
|                     |                            | 0     | 6#0            | 5#0   | 23.92                         | 23.79 | 27.02      | 26.89 |
|                     | 26590/1905                 | 12    | 1#5            | 1#5   | 23.69                         | 23.60 | 26.79      | 26.70 |
|                     |                            | 15    | 6#0            | 5#0   | 23.88                         | 23.64 | 26.98      | 26.74 |

| LTE eMTC<br>Band 4 | Channel/<br>Frequency(MHz) | Index | RB#<br>RBstart |       | Maximum Output<br>Power(dBm) |       | EIRP (dBm) |       |
|--------------------|----------------------------|-------|----------------|-------|------------------------------|-------|------------|-------|
|                    |                            |       | QPSK           | 16QAM | QPSK                         | 16QAM | QPSK       | 16QAM |
| 1.4MHz             | 19957/1710.7               | 0     | 1#0            | 1#0   | 23.70                        | 22.58 | 27.90      | 26.78 |
|                    |                            | 0     | 6#0            | 5#0   | 22.31                        | 21.80 | 26.51      | 26.00 |
|                    | 20175/1732.5               | 0     | 1#0            | 1#0   | 23.67                        | 22.47 | 27.87      | 26.67 |
|                    |                            | 0     | 6#0            | 5#0   | 23.31                        | 21.81 | 27.51      | 26.01 |
|                    | 20393/1754.3               | 0     | 1#5            | 1#5   | 23.76                        | 22.70 | 27.96      | 26.90 |
|                    |                            | 0     | 6#0            | 5#0   | 23.50                        | 21.97 | 27.70      | 26.17 |
| 3MHz               | 19965/1711.5               | 0     | 1#0            | 1#0   | 23.82                        | 22.85 | 28.02      | 27.05 |
|                    |                            | 0     | 6#0            | 5#0   | 21.84                        | 21.51 | 26.04      | 25.71 |
|                    | 20175/1732.5               | 0     | 1#0            | 1#0   | 23.82                        | 22.78 | 28.02      | 26.98 |
|                    |                            | 0     | 6#0            | 5#0   | 22.14                        | 21.81 | 26.34      | 26.01 |
|                    | 20385/1753.5               | 1     | 1#5            | 1#5   | 23.68                        | 23.02 | 27.88      | 27.22 |
|                    |                            | 0     | 6#0            | 5#0   | 22.22                        | 21.96 | 26.42      | 26.16 |
| 5MHz               | 19975/1712.5               | 3     | 1#0            | 1#0   | 23.80                        | 23.81 | 28.00      | 28.01 |
|                    |                            | 0     | 6#0            | 5#0   | 23.22                        | 21.71 | 27.42      | 25.91 |
|                    | 20175/1732.5               | 0     | 1#0            | 1#0   | 23.86                        | 23.85 | 28.06      | 28.05 |
|                    |                            | 0     | 6#0            | 5#0   | 23.23                        | 21.79 | 27.43      | 25.99 |
|                    | 20375/1752.5               | 0     | 1#5            | 1#5   | 23.52                        | 23.94 | 27.72      | 28.14 |
|                    |                            | 0     | 6#0            | 5#0   | 23.36                        | 21.85 | 27.56      | 26.05 |
| 10MHz              | 20000/1715                 | 3     | 1#0            | 1#0   | 23.78                        | 23.80 | 27.98      | 28.00 |
|                    |                            | 0     | 4#0            | 4#0   | 23.96                        | 22.78 | 28.16      | 26.98 |
|                    | 20175/1732.5               | 0     | 1#0            | 1#0   | 23.83                        | 23.85 | 28.03      | 28.05 |
|                    |                            | 0     | 4#0            | 4#0   | 22.95                        | 22.89 | 27.15      | 27.09 |
|                    | 20350/1750                 | 4     | 1#5            | 1#5   | 23.59                        | 23.94 | 27.79      | 28.14 |
|                    |                            | 7     | 4#2            | 4#2   | 23.81                        | 22.06 | 28.01      | 26.26 |
| 15MHz              | 20025/1717.5               | 3     | 1#0            | 1#0   | 23.78                        | 23.84 | 27.98      | 28.04 |
|                    |                            | 0     | 6#0            | 5#0   | 23.61                        | 23.74 | 27.81      | 27.94 |
|                    | 20175/1732.5               | 0     | 1#0            | 1#0   | 23.78                        | 23.75 | 27.98      | 27.95 |
|                    |                            | 0     | 6#0            | 5#0   | 23.69                        | 23.70 | 27.89      | 27.90 |
|                    | 20325/1747.5               | 8     | 1#5            | 1#5   | 23.52                        | 23.99 | 27.72      | 28.19 |
|                    |                            | 11    | 6#0            | 5#0   | 23.81                        | 23.89 | 28.01      | 28.09 |
| 20MHz              | 20050/1720                 | 3     | 1#0            | 1#0   | 23.76                        | 23.78 | 27.96      | 27.98 |
|                    |                            | 0     | 6#0            | 5#0   | 23.62                        | 23.64 | 27.82      | 27.84 |
|                    | 20175/1732.5               | 0     | 1#0            | 1#0   | 23.77                        | 23.82 | 27.97      | 28.02 |
|                    |                            | 0     | 6#0            | 5#0   | 23.65                        | 23.72 | 27.85      | 27.92 |
|                    | 20300/1745                 | 12    | 1#5            | 1#5   | 23.58                        | 23.95 | 27.78      | 28.15 |
|                    |                            | 15    | 6#0            | 5#0   | 23.75                        | 23.90 | 27.95      | 28.10 |

| LTE eMTC<br>Band12 | Channel/<br>Frequency(MHz) | Index | RB#<br>RBstart |       | Maximum Output<br>Power(dBm) |       | ERP (dBm) |       |
|--------------------|----------------------------|-------|----------------|-------|------------------------------|-------|-----------|-------|
|                    |                            |       | QPSK           | 16QAM | QPSK                         | 16QAM | QPSK      | 16QAM |
| 1.4MHz             | 23017/699.7                | 0     | 1#0            | 1#0   | 23.78                        | 22.77 | 18.53     | 17.52 |
|                    |                            | 0     | 6#0            | 5#0   | 22.43                        | 22.02 | 17.18     | 16.77 |
|                    | 23095/707.5                | 0     | 1#0            | 1#0   | 23.43                        | 22.40 | 18.18     | 17.15 |
|                    |                            | 0     | 6#0            | 5#0   | 22.02                        | 21.57 | 16.77     | 16.32 |
|                    | 23173/715.3                | 0     | 1#5            | 1#5   | 23.19                        | 22.00 | 17.94     | 16.75 |
|                    |                            | 0     | 6#0            | 5#0   | 21.64                        | 21.16 | 16.39     | 15.91 |
| 3MHz               | 23025/700.5                | 0     | 1#0            | 1#0   | 23.93                        | 23.12 | 18.68     | 17.87 |
|                    |                            | 0     | 6#0            | 5#0   | 22.28                        | 22.01 | 17.03     | 16.76 |
|                    | 23095/707.5                | 0     | 1#0            | 1#0   | 23.57                        | 22.72 | 18.32     | 17.47 |
|                    |                            | 0     | 6#0            | 5#0   | 21.86                        | 21.58 | 16.61     | 16.33 |
|                    | 23165/714.5                | 1     | 1#5            | 1#5   | 22.35                        | 22.36 | 17.10     | 17.11 |
|                    |                            | 0     | 6#0            | 5#0   | 21.56                        | 21.29 | 16.31     | 16.04 |
| 5MHz               | 23035/701.5                | 3     | 1#0            | 1#0   | 23.77                        | 23.84 | 18.52     | 18.59 |
|                    |                            | 0     | 6#0            | 5#0   | 23.25                        | 22.03 | 18.00     | 16.78 |
|                    | 23095/707.5                | 0     | 1#0            | 1#0   | 23.62                        | 23.68 | 18.37     | 18.43 |
|                    |                            | 0     | 6#0            | 5#0   | 22.93                        | 21.74 | 17.68     | 16.49 |
|                    | 23155/713.5                | 0     | 1#5            | 1#5   | 23.44                        | 23.40 | 18.19     | 18.15 |
|                    |                            | 0     | 6#0            | 5#0   | 22.65                        | 21.44 | 17.40     | 16.19 |
| 10MHz              | 23060/704                  | 3     | 1#0            | 1#0   | 23.76                        | 23.82 | 18.51     | 18.57 |
|                    |                            | 0     | 4#0            | 4#0   | 23.04                        | 23.05 | 17.79     | 17.80 |
|                    | 23095/707.5                | 0     | 1#0            | 1#0   | 23.67                        | 23.80 | 18.42     | 18.55 |
|                    |                            | 0     | 4#0            | 4#0   | 23.97                        | 22.89 | 18.72     | 17.64 |
|                    | 23130/711                  | 4     | 1#5            | 1#5   | 23.44                        | 23.42 | 18.19     | 18.17 |
|                    |                            | 7     | 4#2            | 4#2   | 22.99                        | 21.36 | 17.74     | 16.11 |

| LTE eMTC<br>Band13 | Channel/<br>Frequency(MHz) | Index | RB#<br>RBstart |       | Maximum Output<br>Power(dBm) |       | ERP (dBm) |       |
|--------------------|----------------------------|-------|----------------|-------|------------------------------|-------|-----------|-------|
|                    |                            |       | QPSK           | 16QAM | QPSK                         | 16QAM | QPSK      | 16QAM |
| 5MHz               | 23205/779.5                | 3     | 1#0            | 1#0   | 23.55                        | 23.60 | 23.00     | 23.05 |
|                    |                            | 0     | 6#0            | 5#0   | 22.37                        | 21.51 | 21.82     | 20.96 |
|                    | 23230/782                  | 0     | 1#0            | 1#0   | 23.54                        | 23.62 | 22.99     | 23.07 |
|                    |                            | 0     | 6#0            | 5#0   | 22.82                        | 21.73 | 22.27     | 21.18 |
|                    | 23255/784.5                | 0     | 1#5            | 1#5   | 23.72                        | 23.61 | 23.17     | 23.06 |
|                    |                            | 0     | 6#0            | 5#0   | 22.91                        | 21.67 | 22.36     | 21.12 |
| 10MHz              | 23230/782                  | 0     | 1#0            | 1#0   | 23.53                        | 23.51 | 22.98     | 22.96 |
|                    |                            | 0     | 4#0            | 4#0   | 23.78                        | 22.62 | 23.23     | 22.07 |

| LTE eMTC<br>Band66 | Channel/<br>Frequency(MHz) | Index | RB#<br>RBstart |       | Maximum Output<br>Power(dBm) |       | EIRP (dBm) |       |
|--------------------|----------------------------|-------|----------------|-------|------------------------------|-------|------------|-------|
|                    |                            |       | QPSK           | 16QAM | QPSK                         | 16QAM | QPSK       | 16QAM |
| 1.4MHz             | 131979/1710.7              | 0     | 1#0            | 1#0   | 23.48                        | 22.31 | 27.68      | 26.51 |
|                    |                            | 0     | 6#0            | 5#0   | 23.22                        | 21.70 | 27.42      | 25.90 |
|                    | 132322/1745                | 0     | 1#0            | 1#0   | 23.60                        | 22.44 | 27.80      | 26.64 |
|                    |                            | 0     | 6#0            | 5#0   | 22.35                        | 21.81 | 26.55      | 26.01 |
|                    | 132665/1779.3              | 0     | 1#5            | 1#5   | 23.21                        | 22.81 | 27.41      | 27.01 |
|                    |                            | 0     | 6#0            | 5#0   | 22.62                        | 22.09 | 26.82      | 26.29 |
| 3MHz               | 131987/1711.5              | 0     | 1#0            | 1#0   | 23.69                        | 22.68 | 27.89      | 26.88 |
|                    |                            | 0     | 6#0            | 5#0   | 21.99                        | 21.72 | 26.19      | 25.92 |
|                    | 132322/1745                | 0     | 1#0            | 1#0   | 23.78                        | 22.74 | 27.98      | 26.94 |
|                    |                            | 0     | 6#0            | 5#0   | 22.08                        | 21.81 | 26.28      | 26.01 |
|                    | 132657/1778.5              | 1     | 1#5            | 1#5   | 23.02                        | 23.04 | 27.22      | 27.24 |
|                    |                            | 0     | 6#0            | 5#0   | 23.25                        | 22.13 | 27.45      | 26.33 |
| 5MHz               | 131997/1712.5              | 3     | 1#0            | 1#0   | 23.68                        | 23.65 | 27.88      | 27.85 |
|                    |                            | 0     | 6#0            | 5#0   | 23.05                        | 21.70 | 27.25      | 25.90 |
|                    | 132322/1745                | 0     | 1#0            | 1#0   | 23.79                        | 23.72 | 27.99      | 27.92 |
|                    |                            | 0     | 6#0            | 5#0   | 23.17                        | 21.76 | 27.37      | 25.96 |
|                    | 132647/1777.5              | 0     | 1#5            | 1#5   | 22.82                        | 23.90 | 27.02      | 28.10 |
|                    |                            | 0     | 6#0            | 5#0   | 23.41                        | 22.03 | 27.61      | 26.23 |
| 10MHz              | 132022/1715                | 3     | 1#0            | 1#0   | 23.65                        | 23.64 | 27.85      | 27.84 |
|                    |                            | 0     | 4#0            | 4#0   | 23.85                        | 22.65 | 28.05      | 26.85 |
|                    | 132322/1745                | 0     | 1#0            | 1#0   | 23.71                        | 23.72 | 27.91      | 27.92 |
|                    |                            | 0     | 4#0            | 4#0   | 23.77                        | 22.73 | 27.97      | 26.93 |
|                    | 132622/1775                | 4     | 1#5            | 1#5   | 22.93                        | 23.24 | 27.13      | 27.44 |
|                    |                            | 7     | 4#2            | 4#2   | 23.93                        | 22.10 | 28.13      | 26.30 |
| 15MHz              | 132047/1717.5              | 3     | 1#0            | 1#0   | 23.66                        | 23.65 | 27.86      | 27.85 |
|                    |                            | 0     | 6#0            | 5#0   | 23.65                        | 23.60 | 27.85      | 27.80 |
|                    | 132322/1745                | 0     | 1#0            | 1#0   | 23.70                        | 23.69 | 27.90      | 27.89 |
|                    |                            | 0     | 6#0            | 5#0   | 23.74                        | 23.67 | 27.94      | 27.87 |
|                    | 132597/1772.5              | 8     | 1#5            | 1#5   | 22.88                        | 23.97 | 27.08      | 28.17 |
|                    |                            | 11    | 6#0            | 5#0   | 23.10                        | 23.99 | 27.30      | 28.19 |
| 20MHz              | 132072/1720                | 3     | 1#0            | 1#0   | 23.92                        | 23.64 | 28.12      | 27.84 |
|                    |                            | 0     | 6#0            | 5#0   | 23.65                        | 23.59 | 27.85      | 27.79 |
|                    | 132322/1745                | 0     | 1#0            | 1#0   | 23.68                        | 23.69 | 27.88      | 27.89 |
|                    |                            | 0     | 6#0            | 5#0   | 23.68                        | 23.61 | 27.88      | 27.81 |
|                    | 132572/1770                | 12    | 1#5            | 1#5   | 23.12                        | 23.94 | 27.32      | 28.14 |
|                    |                            | 15    | 6#0            | 5#0   | 23.04                        | 23.99 | 27.24      | 28.19 |

| LTE eMTC<br>Band 26 | Channel/<br>Frequency(MHz) | Index | RB#<br>RBstart |       | Maximum Output<br>Power (dBm) |       | ERP (dBm) |       |
|---------------------|----------------------------|-------|----------------|-------|-------------------------------|-------|-----------|-------|
|                     |                            |       | QPSK           | 16QAM | QPSK                          | 16QAM | QPSK      | 16QAM |
| 1.4MHz              | 26697/814.7                | 0     | 1#0            | 1#0   | 23.84                         | 22.79 | 23.29     | 22.24 |
|                     |                            | 0     | 6#0            | 5#0   | 22.43                         | 22.02 | 21.88     | 21.47 |
|                     | 26740/819                  | 0     | 1#0            | 1#0   | 23.92                         | 22.87 | 23.37     | 22.32 |
|                     |                            | 0     | 6#0            | 5#0   | 22.39                         | 22.04 | 21.84     | 21.49 |
|                     | 26783/823.3                | 0     | 1#5            | 1#5   | 23.07                         | 22.89 | 22.52     | 22.34 |
|                     |                            | 0     | 6#0            | 5#0   | 22.41                         | 22.05 | 21.86     | 21.50 |
| 3MHz                | 26705/815.5                | 0     | 1#0            | 1#0   | 23.67                         | 23.10 | 23.12     | 22.55 |
|                     |                            | 0     | 6#0            | 5#0   | 22.25                         | 22.02 | 21.70     | 21.47 |
|                     | 26740/819                  | 0     | 1#0            | 1#0   | 23.69                         | 23.20 | 23.14     | 22.65 |
|                     |                            | 0     | 6#0            | 5#0   | 22.31                         | 21.87 | 21.76     | 21.32 |
|                     | 26775/822.5                | 1     | 1#5            | 1#5   | 22.97                         | 23.21 | 22.42     | 22.66 |
|                     |                            | 0     | 6#0            | 5#0   | 22.34                         | 22.12 | 21.79     | 21.57 |
| 5MHz                | 26715/816.5                | 3     | 1#0            | 1#0   | 23.95                         | 23.99 | 23.40     | 23.44 |
|                     |                            | 0     | 6#0            | 5#0   | 23.31                         | 22.00 | 22.76     | 21.45 |
|                     | 26740/819                  | 0     | 1#0            | 1#0   | 23.97                         | 23.46 | 23.42     | 22.91 |
|                     |                            | 0     | 6#0            | 5#0   | 23.15                         | 22.20 | 22.60     | 21.65 |
|                     | 26765/821.5                | 0     | 1#5            | 1#5   | 23.70                         | 23.14 | 23.15     | 22.59 |
|                     |                            | 0     | 6#0            | 5#0   | 23.24                         | 22.02 | 22.69     | 21.47 |
| 10MHz               | 26740/819                  | 0     | 1#0            | 1#0   | 22.76                         | 23.24 | 22.21     | 22.69 |
|                     |                            | 0     | 4#0            | 4#0   | 23.05                         | 23.12 | 22.50     | 22.57 |

| LTE<br>eMTC<br>Band 5 | Channel/<br>Frequency(MHz) | Index | RB#<br>RB start |       | Maximum Output<br>Power (dBm) |       | ERP (dBm) |       |
|-----------------------|----------------------------|-------|-----------------|-------|-------------------------------|-------|-----------|-------|
|                       |                            |       | QPSK            | 16QAM | QPSK                          | 16QAM | QPSK      | 16QAM |
| 1.4MHz                | 20407/824.7                | 0     | 1#0             | 1#0   | 23.94                         | 22.83 | 23.39     | 22.28 |
|                       |                            | 0     | 6#0             | 5#0   | 22.54                         | 22.15 | 21.99     | 21.60 |
|                       | 20525/836.5                | 0     | 1#0             | 1#0   | 23.91                         | 22.74 | 23.36     | 22.19 |
|                       |                            | 0     | 6#0             | 5#0   | 22.51                         | 22.01 | 21.96     | 21.46 |
|                       | 20643/848.3                | 0     | 1#5             | 1#5   | 23.82                         | 22.84 | 23.27     | 22.29 |
|                       |                            | 0     | 6#0             | 5#0   | 22.39                         | 22.03 | 21.84     | 21.48 |
| 3MHz                  | 20415/825.5                | 0     | 1#0             | 1#0   | 23.73                         | 23.25 | 23.18     | 22.70 |
|                       |                            | 0     | 6#0             | 5#0   | 22.35                         | 22.12 | 21.80     | 21.57 |
|                       | 20525/836.5                | 0     | 1#0             | 1#0   | 23.65                         | 23.22 | 23.10     | 22.67 |
|                       |                            | 0     | 6#0             | 5#0   | 22.33                         | 22.09 | 21.78     | 21.54 |
|                       | 20635/847.5                | 1     | 1#5             | 1#5   | 23.76                         | 23.05 | 23.21     | 22.50 |
|                       |                            | 0     | 6#0             | 5#0   | 22.25                         | 22.03 | 21.70     | 21.48 |
| 5MHz                  | 20425/826.5                | 3     | 1#0             | 1#0   | 22.80                         | 23.22 | 22.25     | 22.67 |
|                       |                            | 0     | 6#0             | 5#0   | 23.33                         | 22.08 | 22.78     | 21.53 |
|                       | 20525/836.5                | 0     | 1#0             | 1#0   | 23.03                         | 21.67 | 22.48     | 21.12 |
|                       |                            | 0     | 6#0             | 5#0   | 23.33                         | 21.99 | 22.78     | 21.44 |
|                       | 20625/846.5                | 0     | 1#5             | 1#5   | 23.70                         | 23.98 | 23.15     | 23.43 |
|                       |                            | 0     | 6#0             | 5#0   | 23.36                         | 21.97 | 22.81     | 21.42 |
| 10MHz                 | 20450/829                  | 3     | 1#0             | 1#0   | 22.82                         | 23.24 | 22.27     | 22.69 |
|                       |                            | 0     | 4#0             | 4#0   | 23.09                         | 23.11 | 22.54     | 22.56 |
|                       | 20525/836.5                | 0     | 1#0             | 1#0   | 22.98                         | 23.45 | 22.43     | 22.90 |
|                       |                            | 0     | 4#0             | 4#0   | 23.25                         | 23.04 | 22.70     | 22.49 |
|                       | 20600/844                  | 4     | 1#5             | 1#5   | 23.73                         | 23.04 | 23.18     | 22.49 |
|                       |                            | 7     | 4#2             | 4#2   | 23.77                         | 22.15 | 23.22     | 21.60 |

## 7.2. Radiated Spurious Emissions

### RULE PART(S)

FCC KDB 971168 v03r01 Section 7 and ANSI C63.26 (2015).

### LIMIT

#### §22.917(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

#### §24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

#### §27.53(c)

For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;
- (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

#### §27.53(f)

For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to  $-70$  dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and  $-80$  dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

#### §27.53(g)

For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz

bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

#### §27.53(h)

For operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

#### §90.691(a)

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

#### RSS-130 4.7

specifies that: The unwanted emissions in any 100 kHz bandwidth on any frequency outside the low frequency edge and the high frequency edge of each frequency block range(s), shall be attenuated below the transmitter power, P (dBW), by at least  $43 + 10 \log_{10} p$  (watts), dB. However, in the 100 kHz band immediately outside of the equipment's frequency block range, a resolution bandwidth of 30 kHz may be employed.

In addition to the limit outlined in section 4.7.1 above, equipment operating in the frequency bands 746-756 MHz and 777-787 MHz shall also comply with the following restrictions:

a. the power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P (dBW), by at least:

76 + 10 log<sub>10</sub> p (watts), dB, for base and fixed equipment and

65 + 10 log<sub>10</sub> p (watts), dB, for mobile and portable equipment

b. the e.i.r.p. in the band 1559-1610 MHz shall not exceed -70 dBW/MHz for wideband signal and -80 dBW for discrete emission with bandwidth less than 700 Hz.

#### RSS-132 5.5

specifies that:

- i. In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated below the transmitter output power P (dBW) by at least  $43 + 10 \log(p)$  dB.
- ii. After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated below the transmitter output power P (dBW) by at least  $43 + 10 \log(p)$  dB. If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required.

p is the output power specified in watts.

#### RSS-133 5.6

specifies that: Unwanted emissions shall be measured in terms of average values while the transmitter is operating at the manufacturer's rated power and modulated as specified in RSS-Gen.

Equipment shall meet the unwanted emission limits, specified in table 3, outside each frequency block group. For each channel bandwidth supported by the equipment under test, the unwanted

emissions shall be measured and reported for two channel frequencies: one located as close as possible to the low end and one located as close as possible to the high end of the equipment's operating frequency range.

For the unwanted emission limits, in the 1 MHz bands immediately outside and adjacent to the frequency block group, the power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth (OBW). Beyond these 1 MHz bands, a resolution bandwidth of 1 MHz shall be used. A narrower resolution bandwidth may be used, provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz, or 1% of the OBW, as applicable.

For all equipment, the TRP or total conducted power (sum of conducted power across all antenna connectors), where applicable, of the unwanted emissions outside the frequency block or frequency block group shall not exceed the limits shown in the table 3.

| Table 3: Unwanted emission limits for all equipment               |                         |
|-------------------------------------------------------------------|-------------------------|
| Offset frequency from the edge of the frequency block group (MHz) | Unwanted emission limit |
| $\leq 1$                                                          | -13 dBm/(1% of OBW)     |
| $> 1$                                                             | -13 dBm/MHz             |

#### RSS-139 6.6

For all equipment, the TRP or total conducted power (sum of conducted power across all antenna connectors) of the unwanted emissions outside the frequency block or frequency block group shall not exceed the limits shown in table 6.

| Table 6: Unwanted emission limits                                    |                          |
|----------------------------------------------------------------------|--------------------------|
| Offset from the edge of the frequency block or frequency block group | Unwanted emission limits |
| $\leq 1$ MHz                                                         | -13 dBm/(1% of OB*)      |
| $> 1$ MHz                                                            | -13 dBm/MHz              |

\*OB is the occupied bandwidth.

In addition to complying with the above limits, equipment operating in the band 2180-2200 MHz may require additional filtering (see SRSP-519).

## TEST PROCEDURE

### KDB 971168 D01 Section 7

Below 1GHz test procedure as below:

1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.

4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. Calculate power in dBm by the following formula:  

$$\text{ERP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

Where:

$P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g$  [dBm] – cable loss [dB]. The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13 dBm which is equivalent to the required minimum attenuation of  $43 + 10\log_{10}(\text{Power [Watts]})$ .

Above 1GHz test procedure as below:

1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. Calculate power in dBm by the following formula:  

$$\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$

$$\text{EIRP} = \text{ERP} + 2.15\text{dB}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $43 + 10\log(P)\text{dB}$  below the transmitter power  $P(\text{Watts})$   

$$= P(\text{W}) - [43 + 10\log(P)] (\text{dB})$$

$$= [30 + 10\log(P)] (\text{dBm}) - [43 + 10\log(P)] (\text{dB})$$


$$= -13\text{dBm}.$$

NOTE 1: Radiated spurious emissions were investigated below 30 MHz, 30 MHz – 1 GHz and above 1 GHz. There were no emissions found on below 30 MHz and 30 MHz – 1 GHz. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.


NOTE 2: Please refer to section 5.4 for bandwidth and RB setting about LTE bands.

## TEST SETUP

### Test Setup for Below 1 GHz

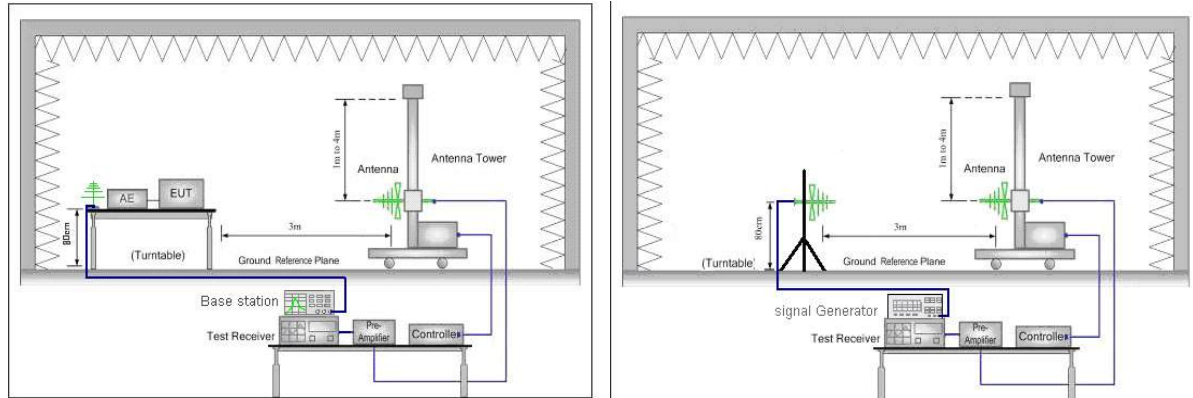

### Test Setup for Above 1 GHz

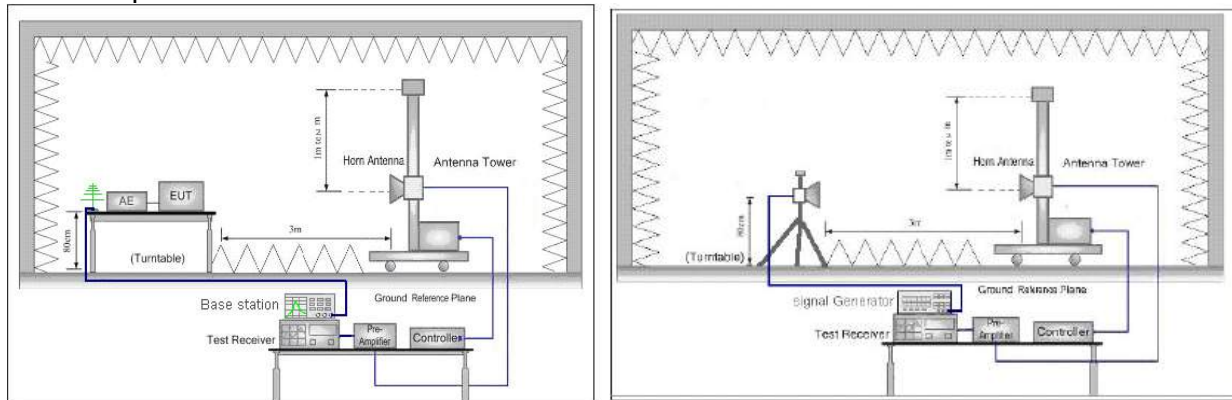


## TEST ENVIRONMENT

|                     |        |                   |     |
|---------------------|--------|-------------------|-----|
| Temperature         | 23.2°C | Relative Humidity | 54% |
| Atmosphere Pressure | 101kPa |                   |     |

**RESULTS**

Undesirable radiated Spurious Emission below 1GHz (30MHz to 1GHz)

All modes have been tested and the worst result as bellow:

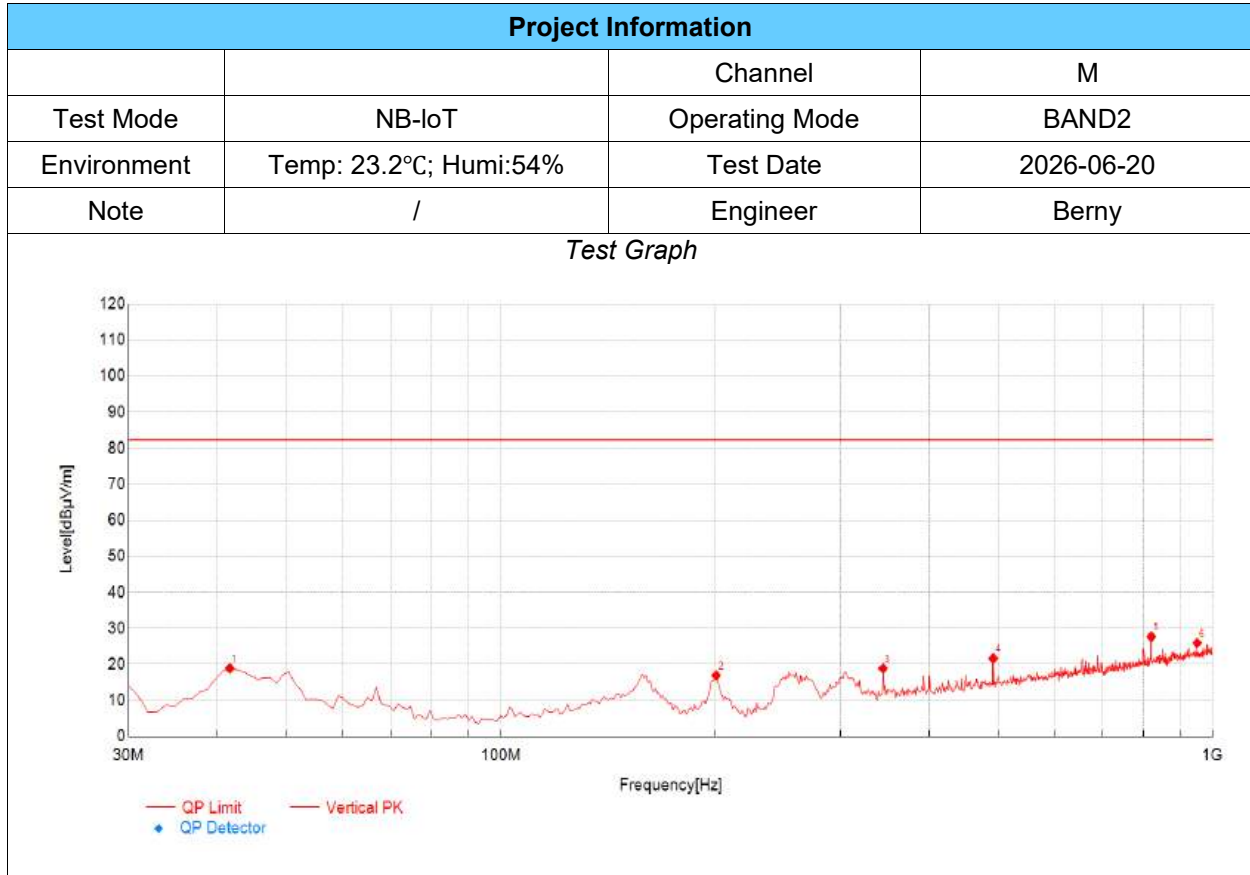**TX Radiated Test Result**


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBuV] | Level [dBuV/m] | Factor [dB/m] | Limit [dBuV/m] | Margin [dB] | Det | Poi      | Verdict |
| 1                   | 41.64           | 38.30          | 18.89          | -19.41        | 82.30          | 63.41       | PK  | Vertical | PASS    |
| 2                   | 200.72          | 39.30          | 16.94          | -22.36        | 82.30          | 65.36       | PK  | Vertical | PASS    |
| 3                   | 344.28          | 36.24          | 18.85          | -17.39        | 82.30          | 63.45       | PK  | Vertical | PASS    |
| 4                   | 491.72          | 34.94          | 21.66          | -13.28        | 82.30          | 60.64       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 34.59          | 27.68          | -6.91         | 82.30          | 54.62       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 30.25          | 25.93          | -4.32         | 82.30          | 56.37       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

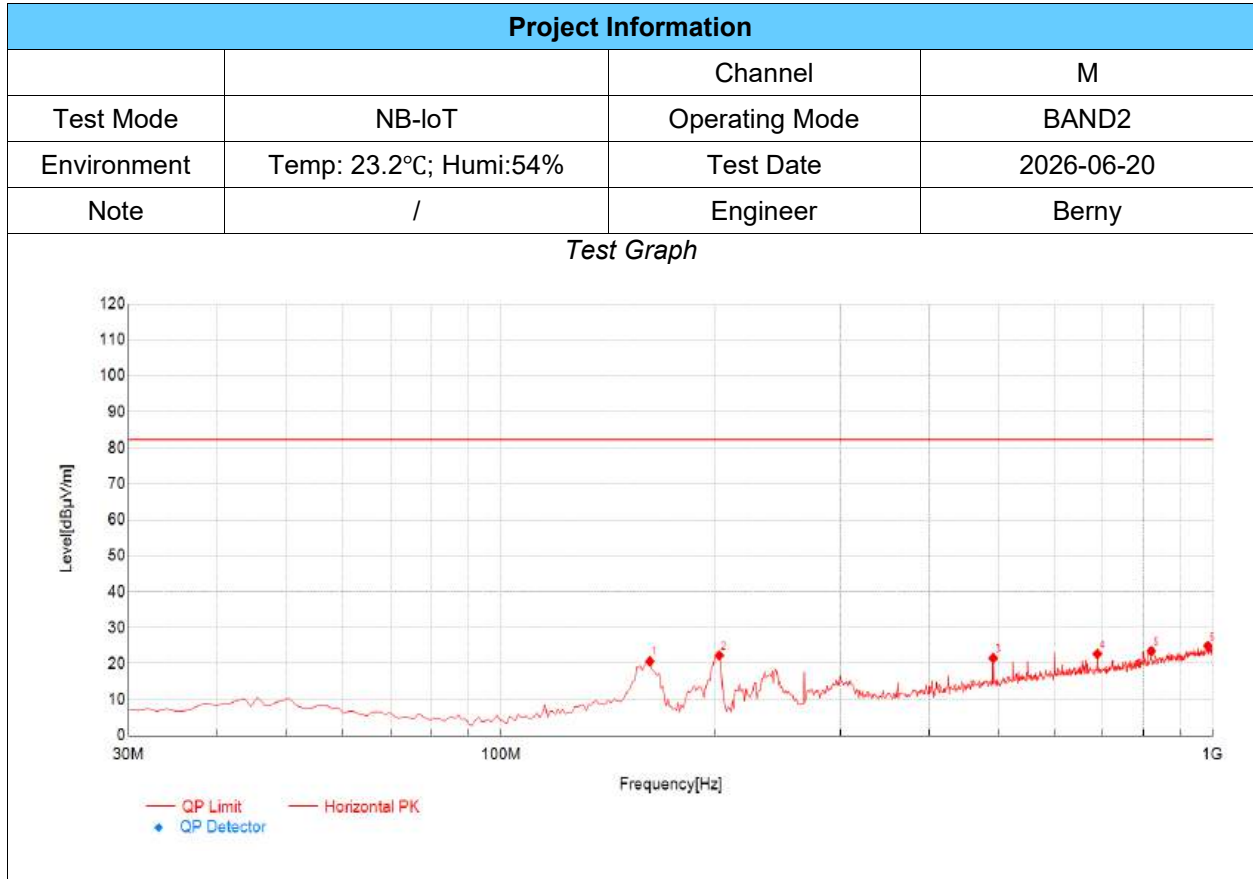

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 161.92          | 39.01          | 20.65          | -18.36        | 82.30          | 61.65       | PK  | Horizontal | PASS    |
| 2                   | 202.66          | 44.58          | 22.30          | -22.28        | 82.30          | 60.00       | PK  | Horizontal | PASS    |
| 3                   | 491.72          | 34.81          | 21.53          | -13.28        | 82.30          | 60.77       | PK  | Horizontal | PASS    |
| 4                   | 688.63          | 32.31          | 22.72          | -9.59         | 82.30          | 59.58       | PK  | Horizontal | PASS    |
| 5                   | 819.58          | 30.39          | 23.48          | -6.91         | 82.30          | 58.82       | PK  | Horizontal | PASS    |
| 6                   | 984.48          | 28.86          | 24.92          | -3.94         | 82.30          | 57.38       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | L          |
| Test Mode           | NB-IoT                 | Operating Mode | BAND2      |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

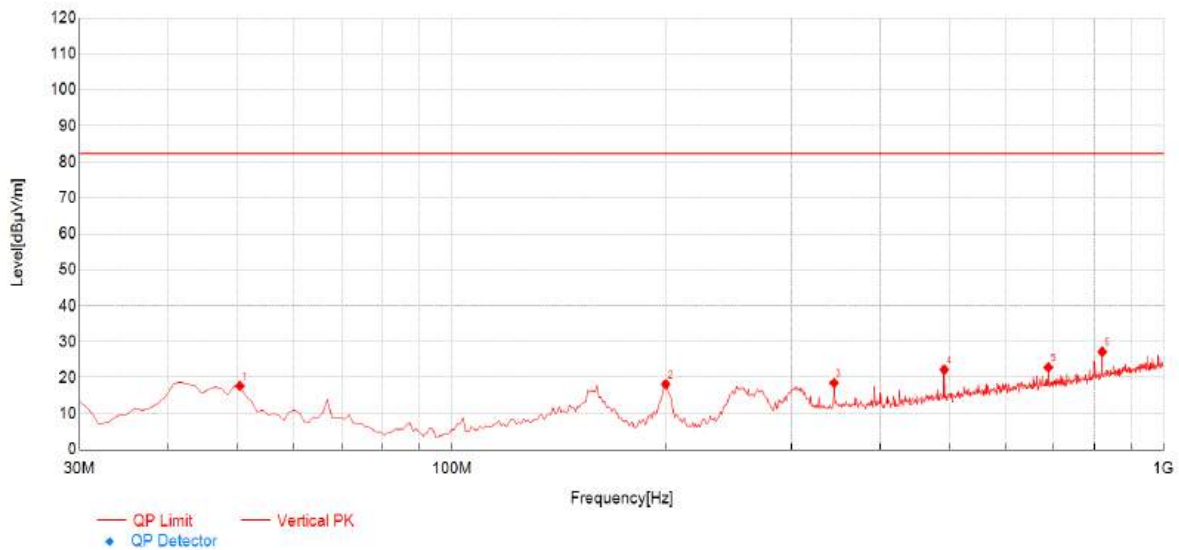


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 50.37           | 36.24          | 17.72          | -18.52        | 82.30          | 64.58       | PK  | Vertical | PASS    |
| 2                   | 199.75          | 40.49          | 18.17          | -22.32        | 82.30          | 64.13       | PK  | Vertical | PASS    |
| 3                   | 344.28          | 35.90          | 18.51          | -17.39        | 82.30          | 63.79       | PK  | Vertical | PASS    |
| 4                   | 491.72          | 35.53          | 22.25          | -13.28        | 82.30          | 60.05       | PK  | Vertical | PASS    |
| 5                   | 688.63          | 32.47          | 22.88          | -9.59         | 82.30          | 59.42       | PK  | Vertical | PASS    |
| 6                   | 819.58          | 34.12          | 27.21          | -6.91         | 82.30          | 55.09       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

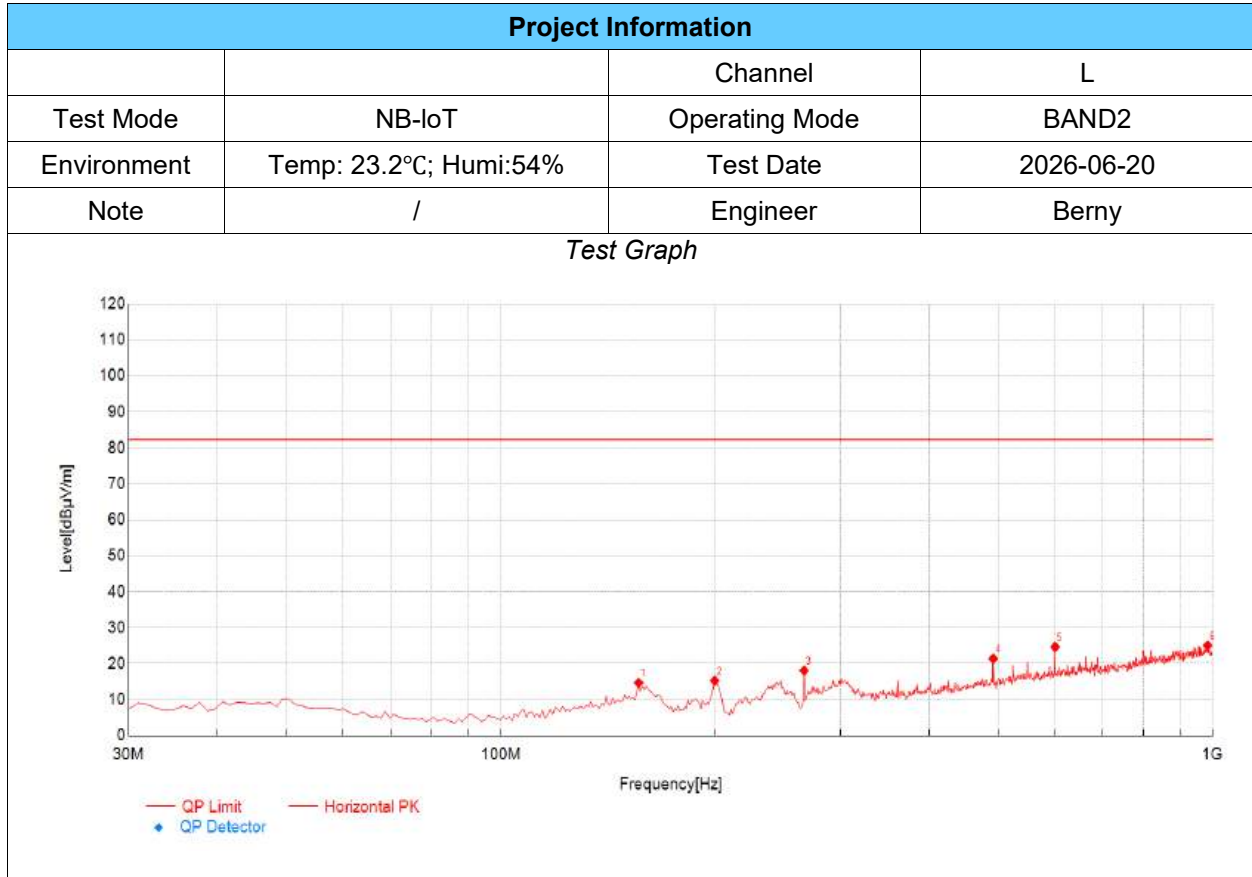


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 156.10          | 32.73          | 14.69          | -18.04        | 82.30          | 67.61       | PK  | Horizontal | PASS    |
| 2                   | 199.75          | 37.61          | 15.29          | -22.32        | 82.30          | 67.01       | PK  | Horizontal | PASS    |
| 3                   | 266.68          | 37.95          | 18.09          | -19.86        | 82.30          | 64.21       | PK  | Horizontal | PASS    |
| 4                   | 491.72          | 34.69          | 21.41          | -13.28        | 82.30          | 60.89       | PK  | Horizontal | PASS    |
| 5                   | 600.36          | 35.44          | 24.65          | -10.79        | 82.30          | 57.65       | PK  | Horizontal | PASS    |
| 6                   | 983.51          | 28.98          | 25.01          | -3.97         | 82.30          | 57.29       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

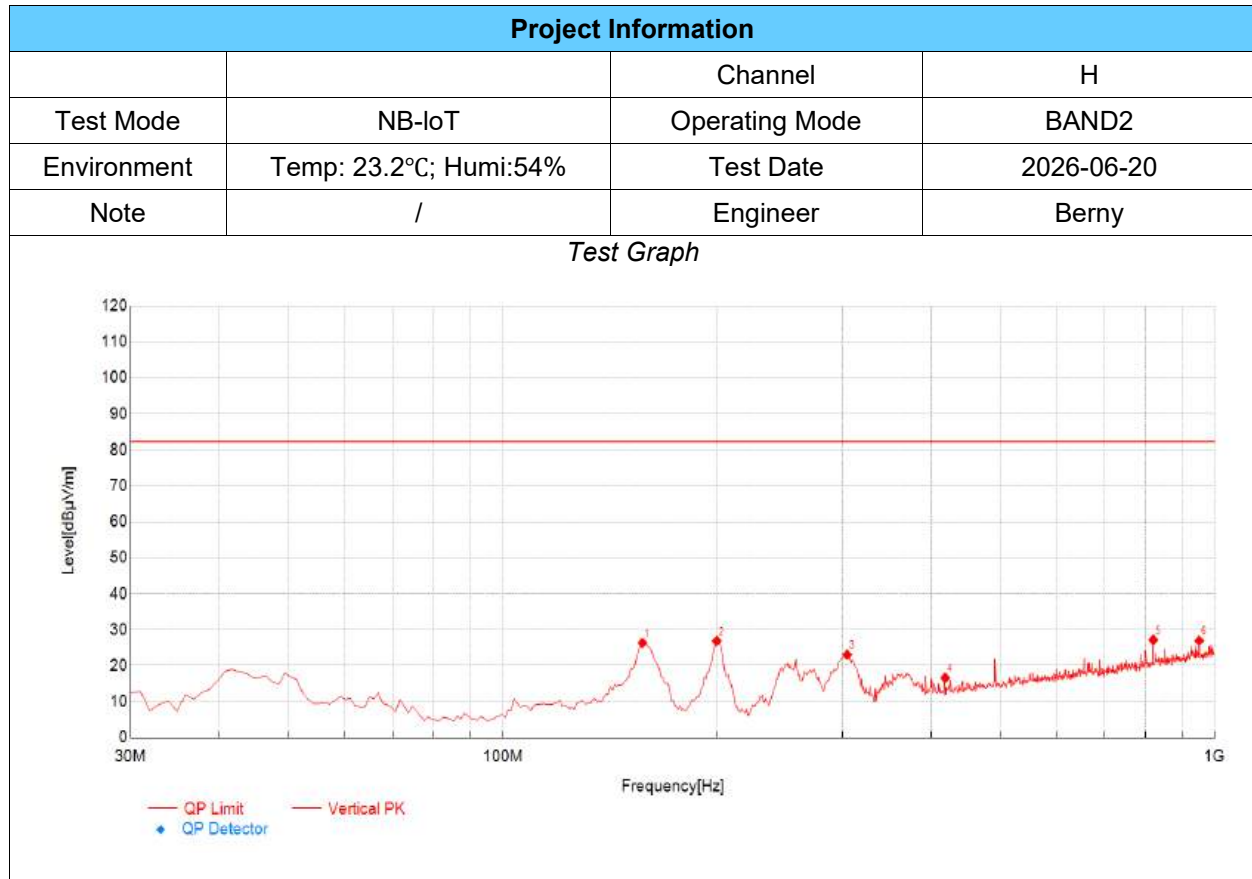


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 157.07          | 44.43          | 26.33          | -18.10        | 82.30          | 55.97       | PK  | Vertical | PASS    |
| 2                   | 199.75          | 49.22          | 26.90          | -22.32        | 82.30          | 55.40       | PK  | Vertical | PASS    |
| 3                   | 304.51          | 41.56          | 23.08          | -18.48        | 82.30          | 59.22       | PK  | Vertical | PASS    |
| 4                   | 418.00          | 31.82          | 16.63          | -15.19        | 82.30          | 65.67       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 34.09          | 27.18          | -6.91         | 82.30          | 55.12       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 31.29          | 26.97          | -4.32         | 82.30          | 55.33       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

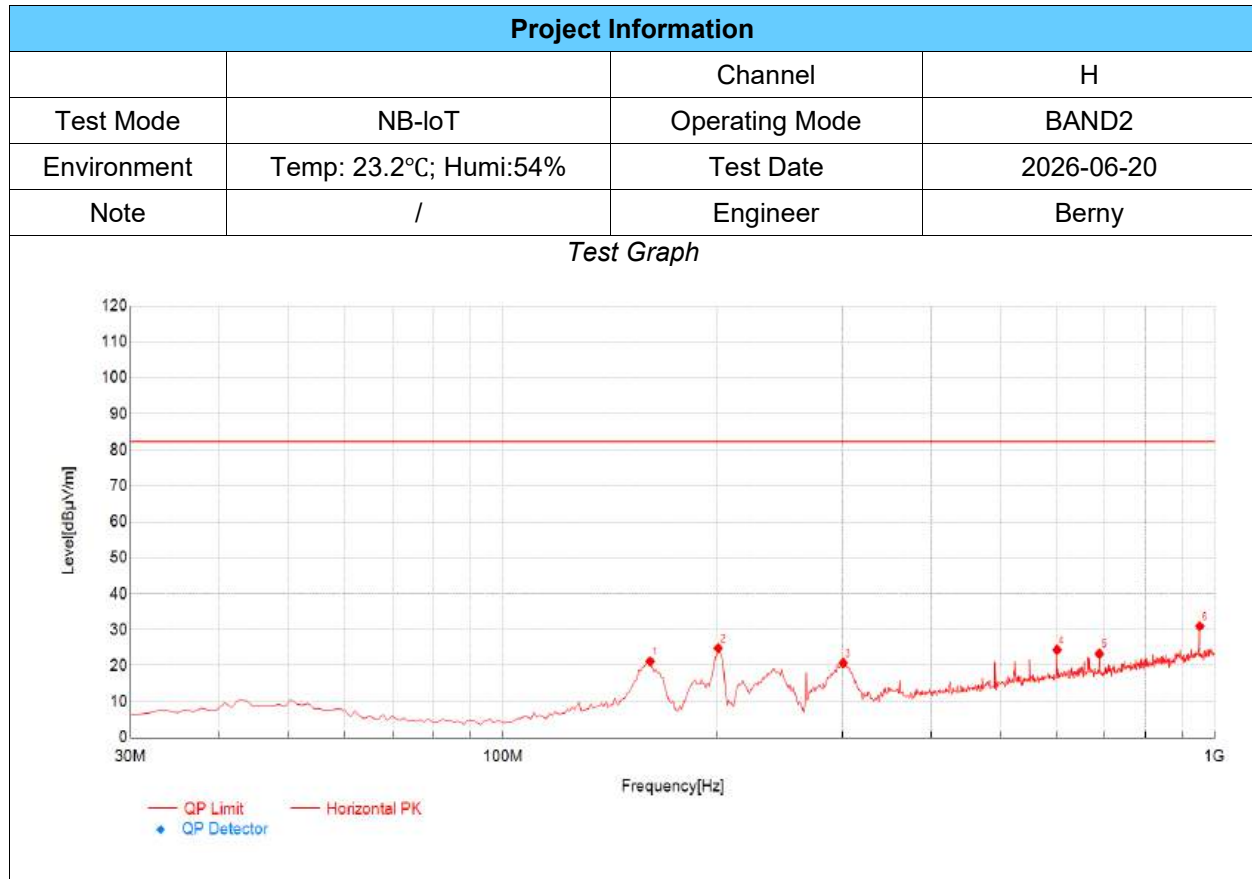


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 160.95          | 39.45          | 21.20          | -18.25        | 82.30          | 61.10       | PK  | Horizontal | PASS    |
| 2                   | 200.72          | 47.18          | 24.82          | -22.36        | 82.30          | 57.48       | PK  | Horizontal | PASS    |
| 3                   | 300.63          | 39.38          | 20.74          | -18.64        | 82.30          | 61.56       | PK  | Horizontal | PASS    |
| 4                   | 600.36          | 35.18          | 24.39          | -10.79        | 82.30          | 57.91       | PK  | Horizontal | PASS    |
| 5                   | 688.63          | 32.90          | 23.31          | -9.59         | 82.30          | 58.99       | PK  | Horizontal | PASS    |
| 6                   | 952.47          | 35.31          | 30.96          | -4.35         | 82.30          | 51.34       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

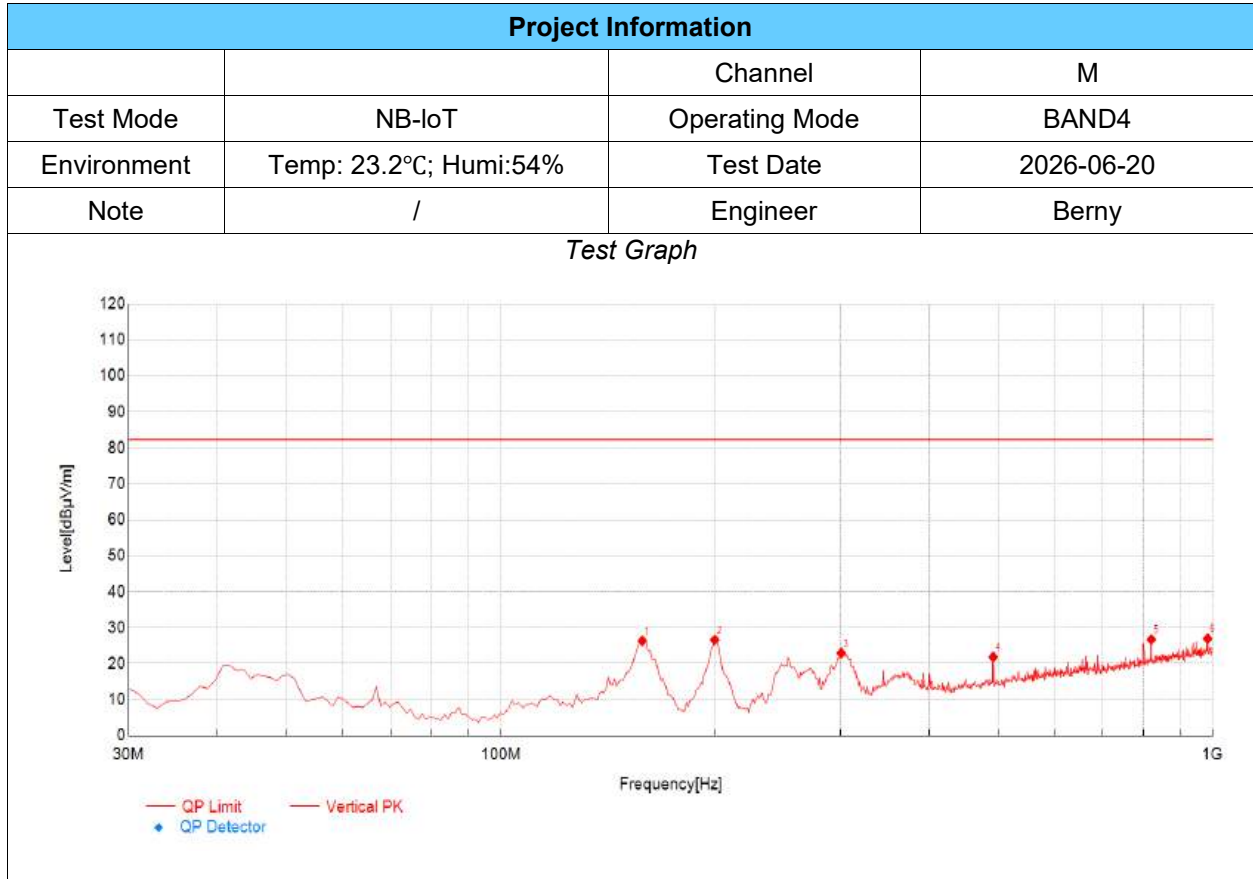


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 158.04          | 44.46          | 26.36          | -18.10        | 82.30          | 55.94       | PK  | Vertical | PASS    |
| 2                   | 199.75          | 48.95          | 26.63          | -22.32        | 82.30          | 55.67       | PK  | Vertical | PASS    |
| 3                   | 300.63          | 41.60          | 22.96          | -18.64        | 82.30          | 59.34       | PK  | Vertical | PASS    |
| 4                   | 491.72          | 35.18          | 21.90          | -13.28        | 82.30          | 60.40       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 33.63          | 26.72          | -6.91         | 82.30          | 55.58       | PK  | Vertical | PASS    |
| 6                   | 983.51          | 30.94          | 26.97          | -3.97         | 82.30          | 55.33       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

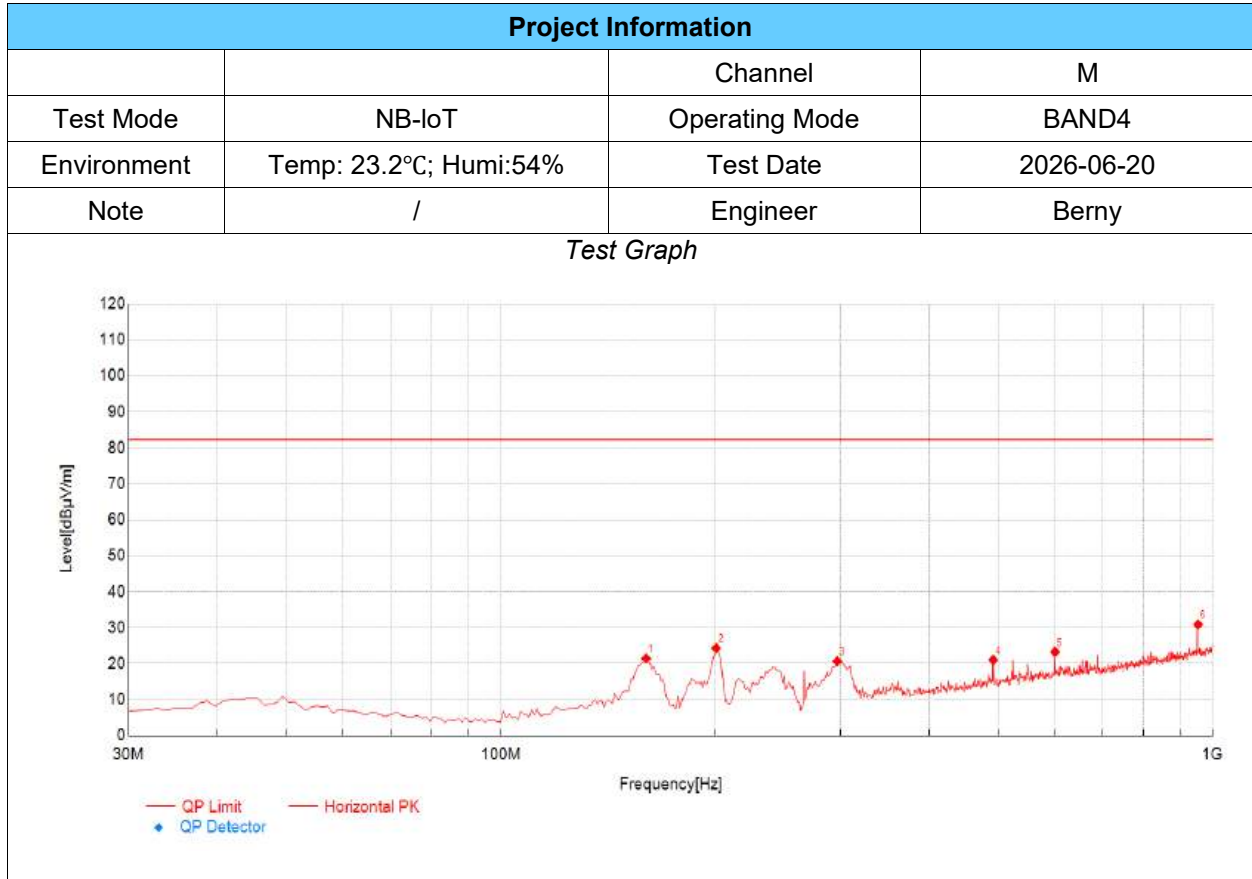


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 159.98          | 39.59          | 21.49          | -18.10        | 82.30          | 60.81       | PK  | Horizontal | PASS    |
| 2                   | 200.72          | 46.67          | 24.31          | -22.36        | 82.30          | 57.99       | PK  | Horizontal | PASS    |
| 3                   | 296.75          | 39.57          | 20.71          | -18.86        | 82.30          | 61.59       | PK  | Horizontal | PASS    |
| 4                   | 491.72          | 34.32          | 21.04          | -13.28        | 82.30          | 61.26       | PK  | Horizontal | PASS    |
| 5                   | 600.36          | 34.09          | 23.30          | -10.79        | 82.30          | 59.00       | PK  | Horizontal | PASS    |
| 6                   | 953.44          | 35.20          | 30.89          | -4.31         | 82.30          | 51.41       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

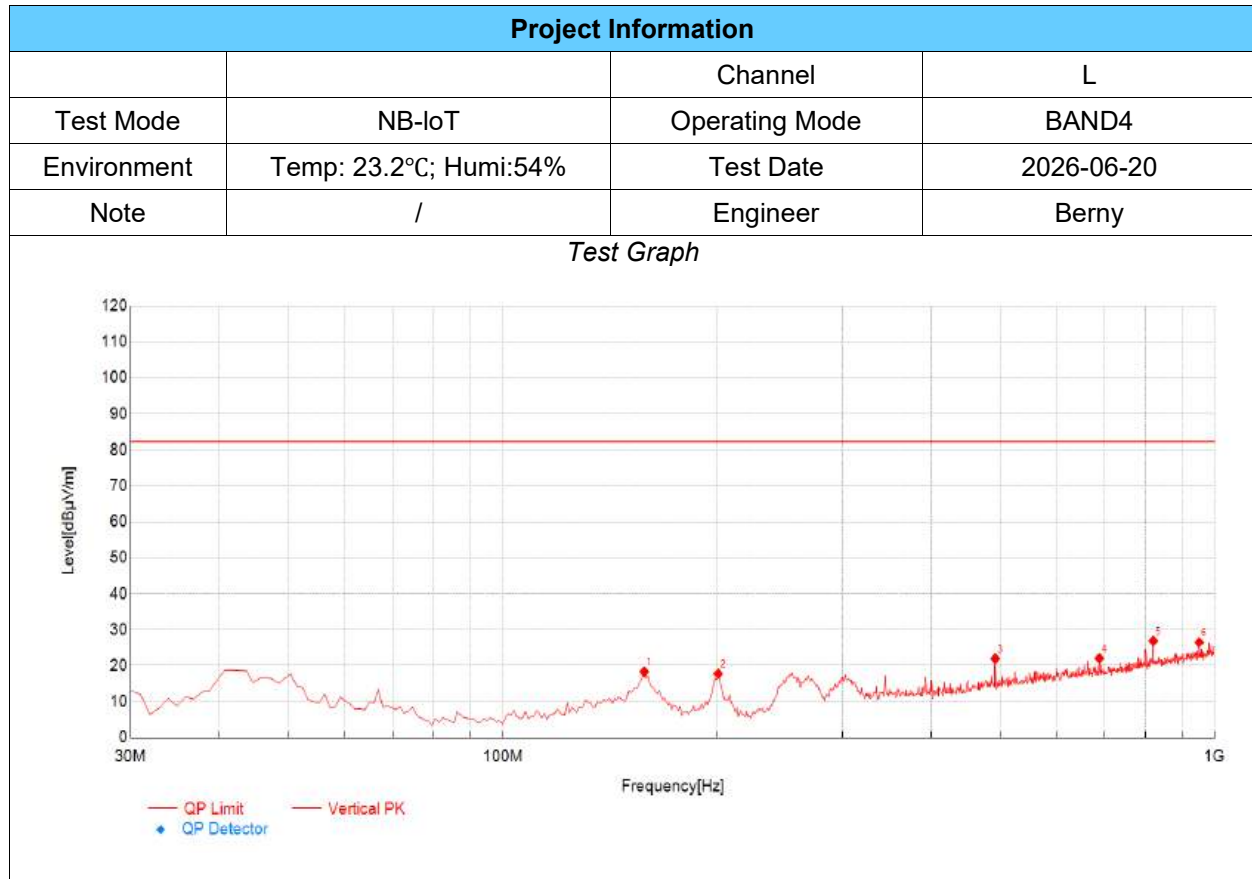


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 158.04          | 36.40          | 18.30          | -18.10        | 82.30          | 64.00       | PK  | Vertical | PASS    |
| 2                   | 200.72          | 40.15          | 17.79          | -22.36        | 82.30          | 64.51       | PK  | Vertical | PASS    |
| 3                   | 491.72          | 35.27          | 21.99          | -13.28        | 82.30          | 60.31       | PK  | Vertical | PASS    |
| 4                   | 688.63          | 31.66          | 22.07          | -9.59         | 82.30          | 60.23       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 33.79          | 26.88          | -6.91         | 82.30          | 55.42       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 30.80          | 26.48          | -4.32         | 82.30          | 55.82       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

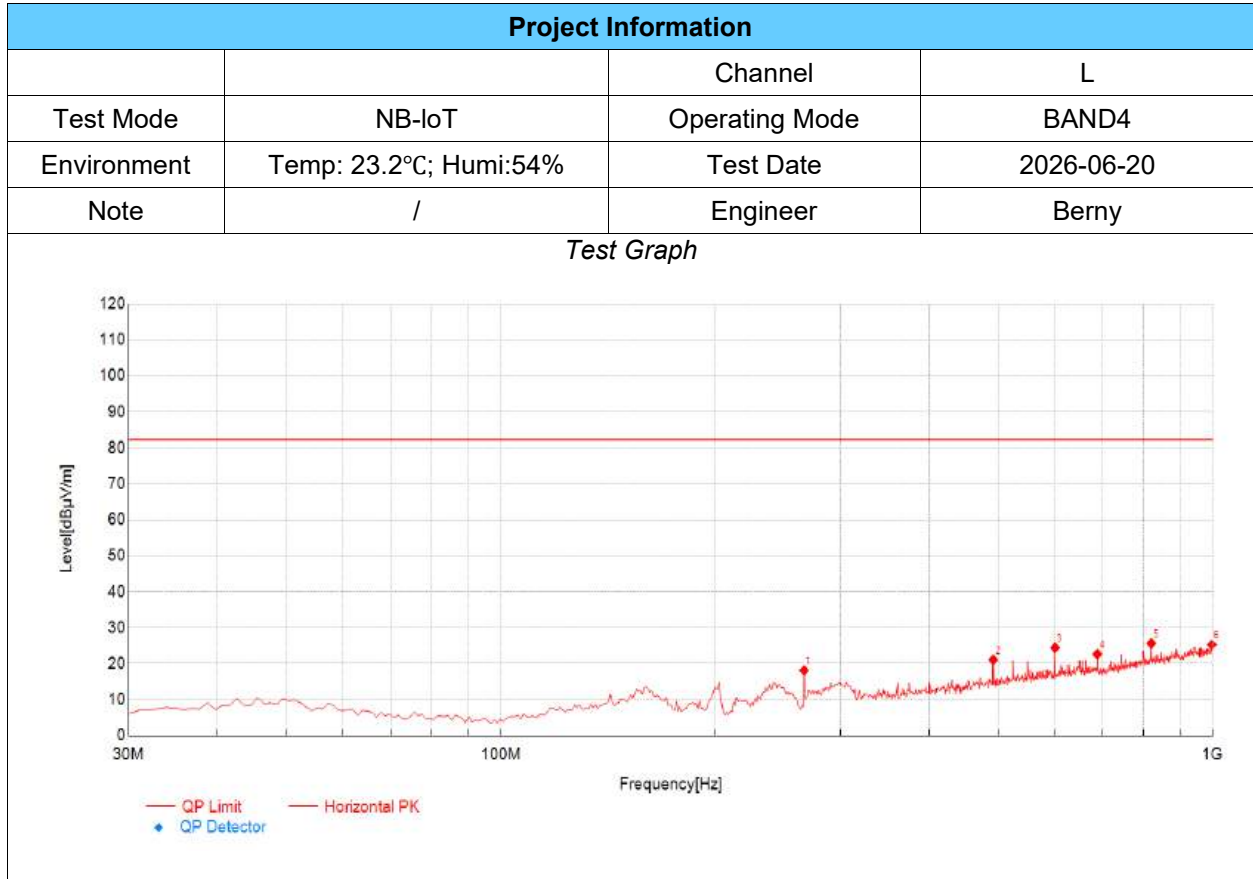

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 266.68          | 38.00          | 18.14          | -19.86        | 82.30          | 64.16       | PK  | Horizontal | PASS    |
| 2                   | 491.72          | 34.36          | 21.08          | -13.28        | 82.30          | 61.22       | PK  | Horizontal | PASS    |
| 3                   | 600.36          | 35.20          | 24.41          | -10.79        | 82.30          | 57.89       | PK  | Horizontal | PASS    |
| 4                   | 688.63          | 32.25          | 22.66          | -9.59         | 82.30          | 59.64       | PK  | Horizontal | PASS    |
| 5                   | 819.58          | 32.57          | 25.66          | -6.91         | 82.30          | 56.64       | PK  | Horizontal | PASS    |
| 6                   | 997.09          | 28.81          | 25.27          | -3.54         | 82.30          | 57.03       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | H          |
| Test Mode           | NB-IoT                 | Operating Mode | BAND4      |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

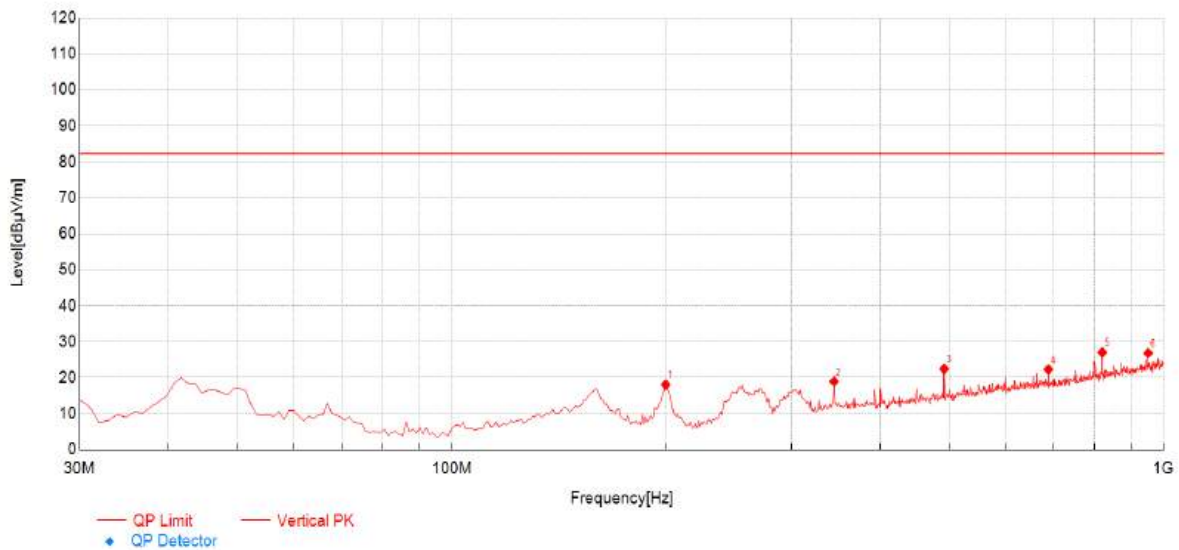


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 199.75          | 40.40          | 18.08          | -22.32        | 82.30          | 64.22       | PK  | Vertical | PASS    |
| 2                   | 344.28          | 36.32          | 18.93          | -17.39        | 82.30          | 63.37       | PK  | Vertical | PASS    |
| 3                   | 491.72          | 35.74          | 22.46          | -13.28        | 82.30          | 59.84       | PK  | Vertical | PASS    |
| 4                   | 688.63          | 31.90          | 22.31          | -9.59         | 82.30          | 59.99       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 33.94          | 27.03          | -6.91         | 82.30          | 55.27       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 31.15          | 26.83          | -4.32         | 82.30          | 55.47       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

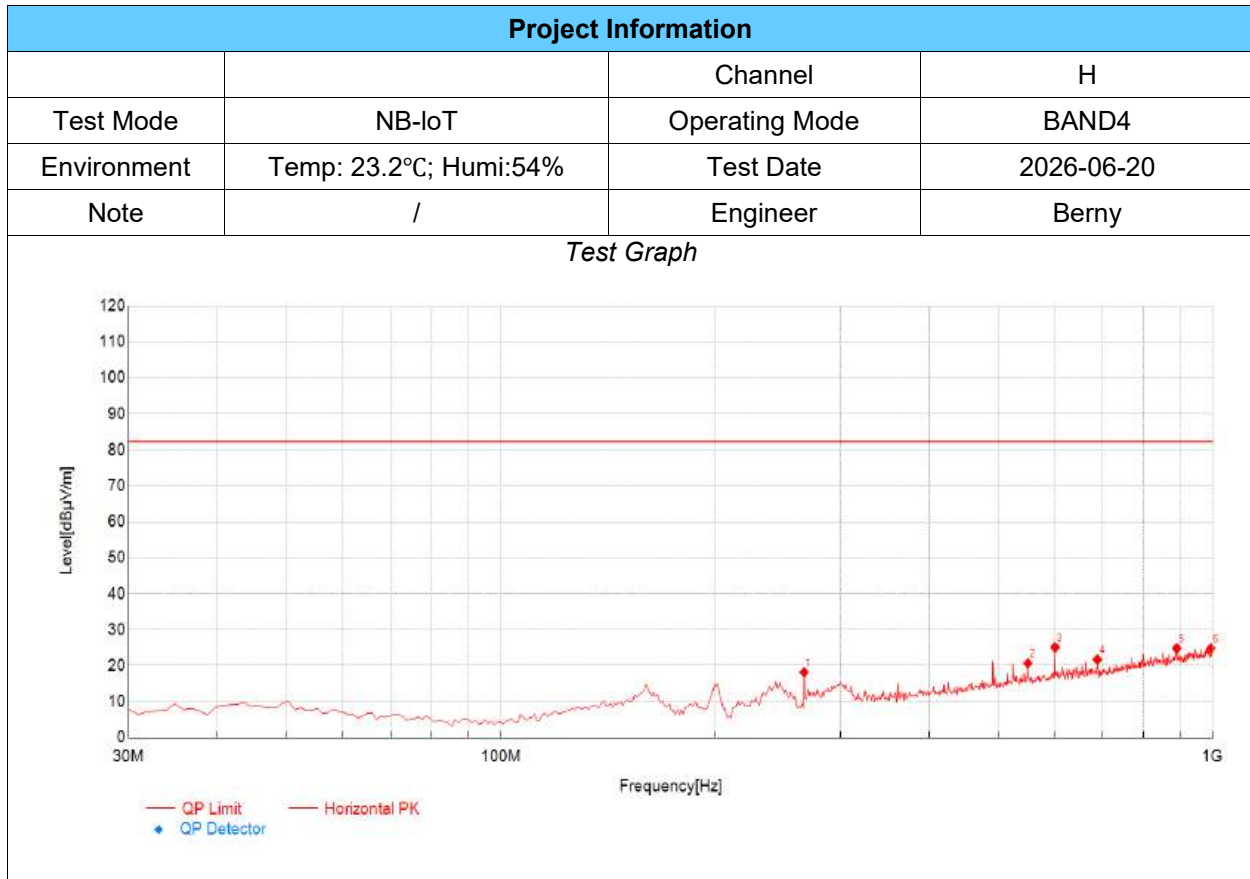


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 266.68          | 38.03          | 18.17          | -19.86        | 82.30          | 64.13       | PK  | Horizontal | PASS    |
| 2                   | 549.92          | 32.65          | 20.67          | -11.98        | 82.30          | 61.63       | PK  | Horizontal | PASS    |
| 3                   | 600.36          | 35.87          | 25.08          | -10.79        | 82.30          | 57.22       | PK  | Horizontal | PASS    |
| 4                   | 688.63          | 31.30          | 21.71          | -9.59         | 82.30          | 60.59       | PK  | Horizontal | PASS    |
| 5                   | 890.39          | 30.14          | 24.81          | -5.33         | 82.30          | 57.49       | PK  | Horizontal | PASS    |
| 6                   | 994.18          | 28.54          | 24.83          | -3.71         | 82.30          | 57.47       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

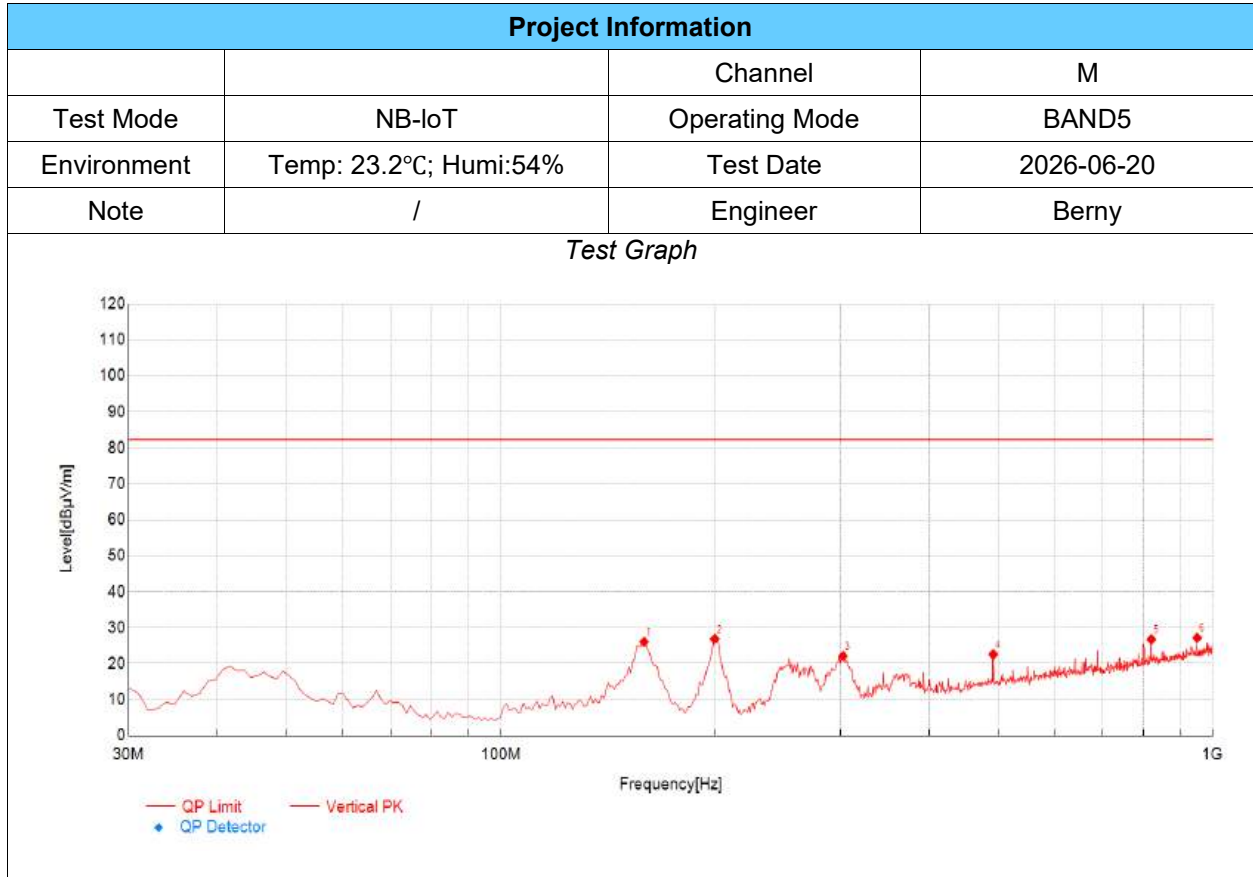


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 159.01          | 44.15          | 26.06          | -18.09        | 82.30          | 56.24       | PK  | Vertical | PASS    |
| 2                   | 199.75          | 49.22          | 26.90          | -22.32        | 82.30          | 55.40       | PK  | Vertical | PASS    |
| 3                   | 302.57          | 40.69          | 22.12          | -18.57        | 82.30          | 60.18       | PK  | Vertical | PASS    |
| 4                   | 491.72          | 35.88          | 22.60          | -13.28        | 82.30          | 59.70       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 33.67          | 26.76          | -6.91         | 82.30          | 55.54       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 31.53          | 27.21          | -4.32         | 82.30          | 55.09       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

## TX Radiated Test Result

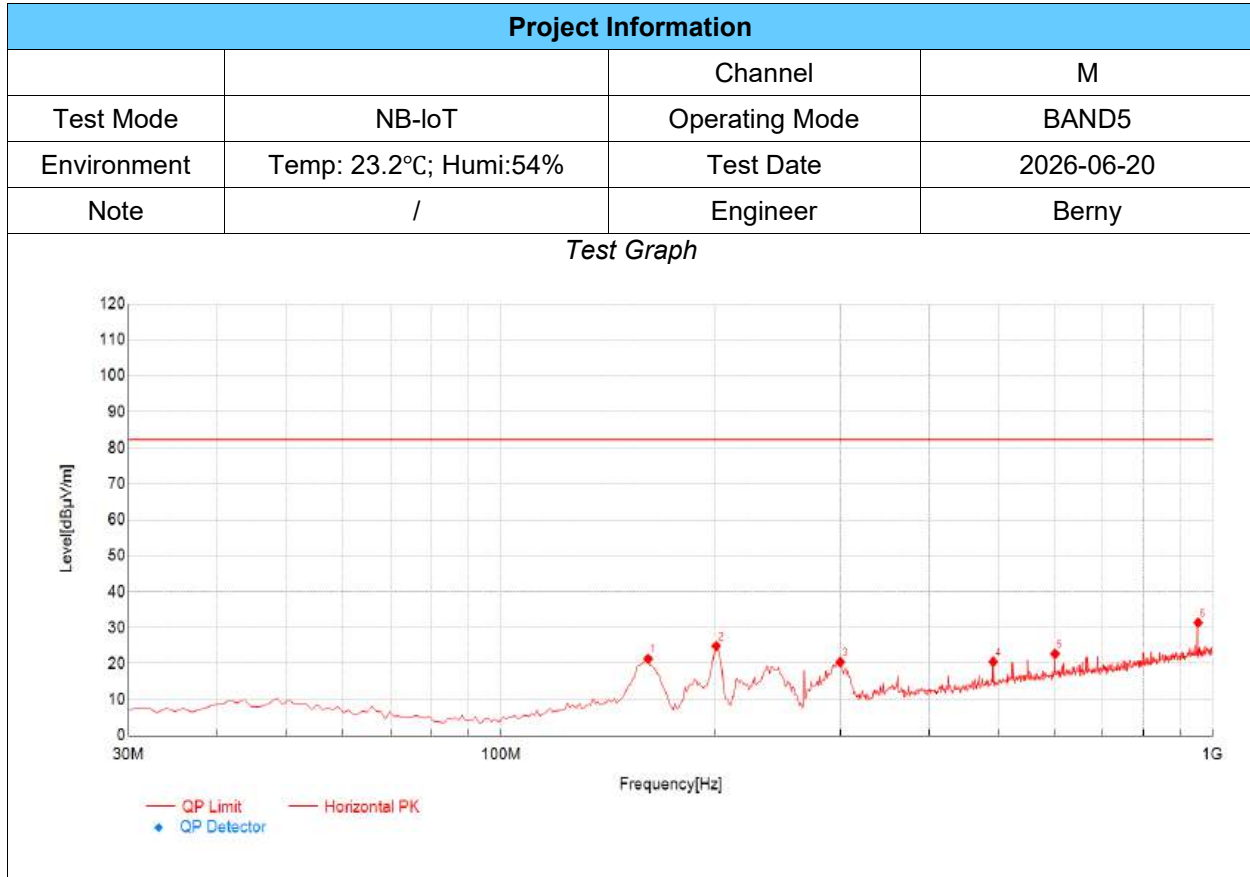


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 160.95          | 39.63          | 21.38          | -18.25        | 82.30          | 60.92       | PK  | Horizontal | PASS    |
| 2                   | 200.72          | 47.23          | 24.87          | -22.36        | 82.30          | 57.43       | PK  | Horizontal | PASS    |
| 3                   | 299.66          | 39.14          | 20.47          | -18.67        | 82.30          | 61.83       | PK  | Horizontal | PASS    |
| 4                   | 491.72          | 33.82          | 20.54          | -13.28        | 82.30          | 61.76       | PK  | Horizontal | PASS    |
| 5                   | 600.36          | 33.54          | 22.75          | -10.79        | 82.30          | 59.55       | PK  | Horizontal | PASS    |
| 6                   | 953.44          | 35.70          | 31.39          | -4.31         | 82.30          | 50.91       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

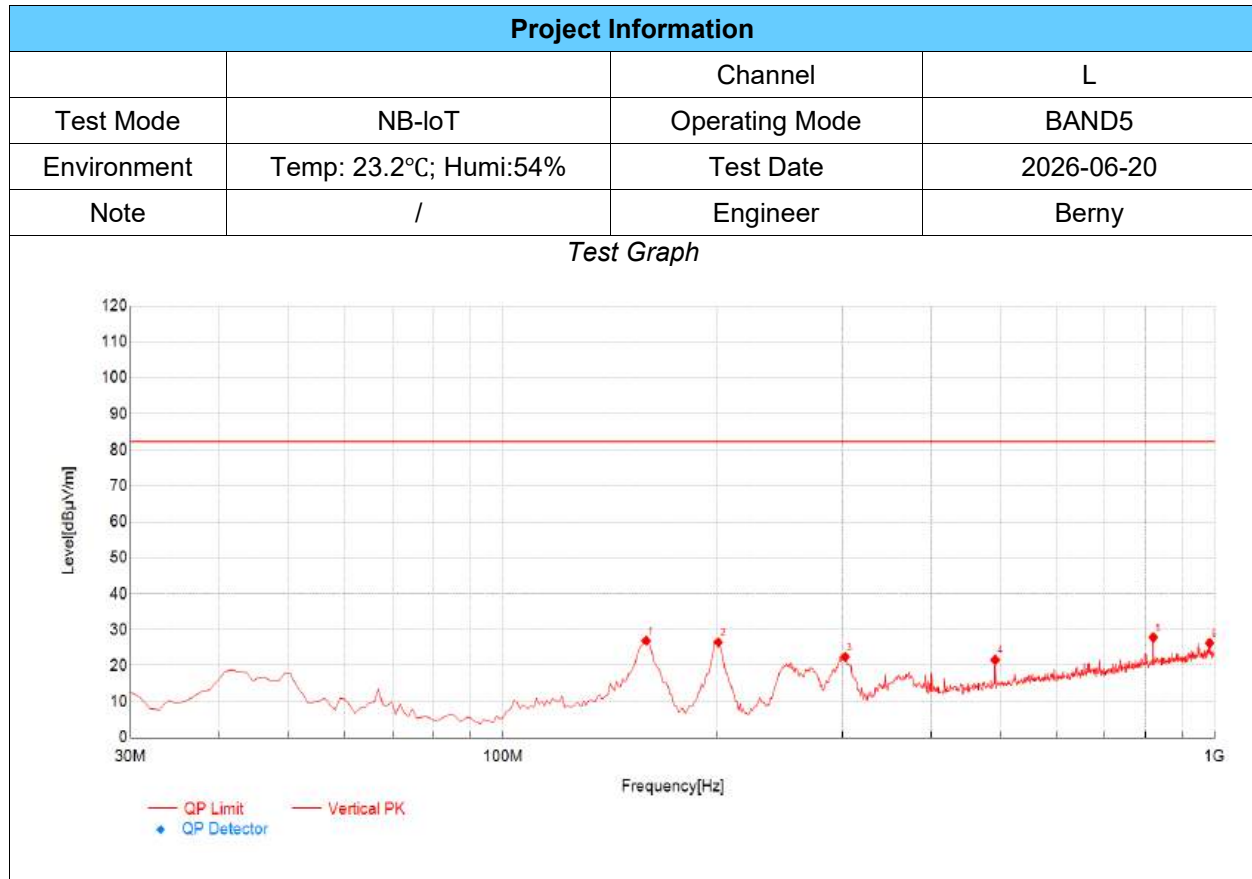


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 159.01          | 45.03          | 26.94          | -18.09        | 82.30          | 55.36       | PK  | Vertical | PASS    |
| 2                   | 200.72          | 48.86          | 26.50          | -22.36        | 82.30          | 55.80       | PK  | Vertical | PASS    |
| 3                   | 302.57          | 41.04          | 22.47          | -18.57        | 82.30          | 59.83       | PK  | Vertical | PASS    |
| 4                   | 491.72          | 34.89          | 21.61          | -13.28        | 82.30          | 60.69       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 34.79          | 27.88          | -6.91         | 82.30          | 54.42       | PK  | Vertical | PASS    |
| 6                   | 983.51          | 30.24          | 26.27          | -3.97         | 82.30          | 56.03       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

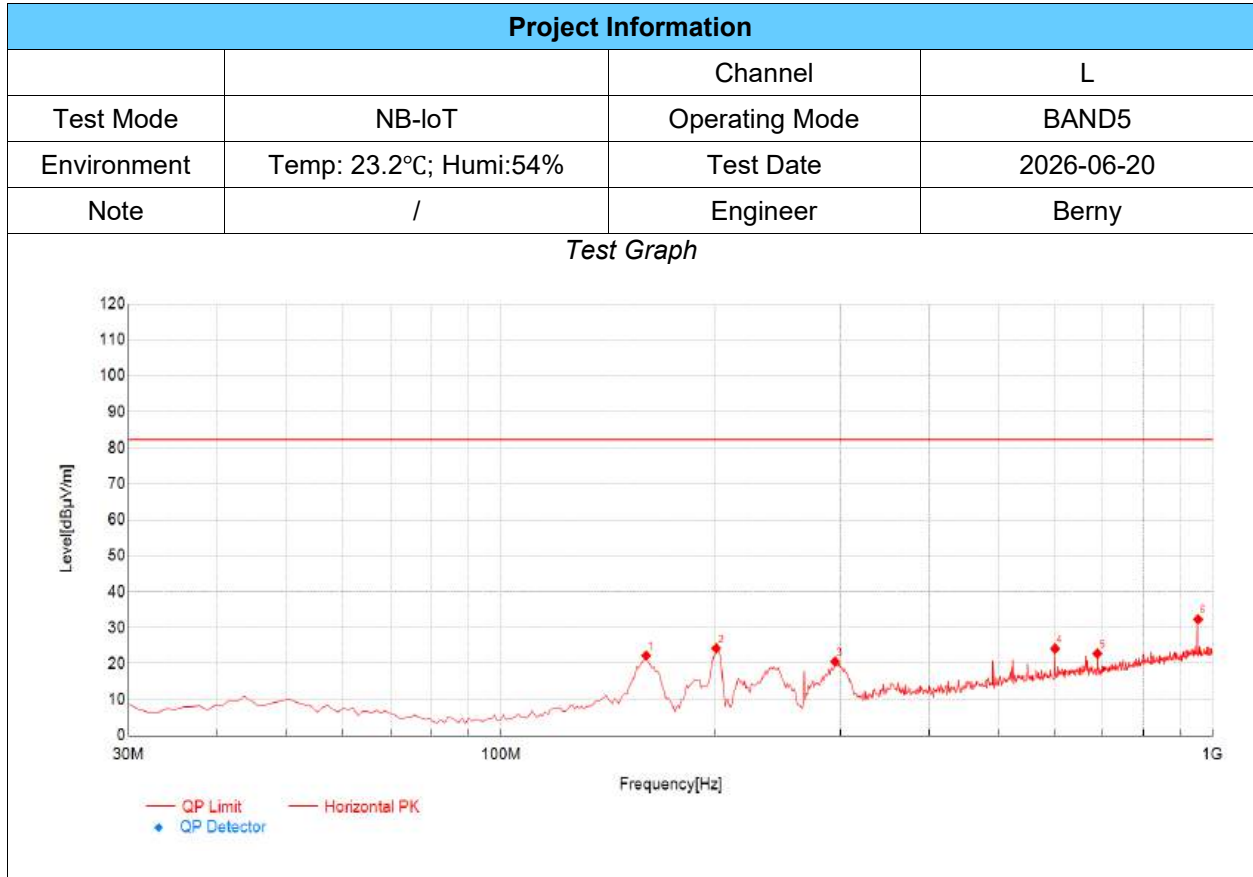


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 159.98          | 40.37          | 22.27          | -18.10        | 82.30          | 60.03       | PK  | Horizontal | PASS    |
| 2                   | 200.72          | 46.63          | 24.27          | -22.36        | 82.30          | 58.03       | PK  | Horizontal | PASS    |
| 3                   | 294.81          | 39.56          | 20.61          | -18.95        | 82.30          | 61.69       | PK  | Horizontal | PASS    |
| 4                   | 600.36          | 34.93          | 24.14          | -10.79        | 82.30          | 58.16       | PK  | Horizontal | PASS    |
| 5                   | 688.63          | 32.40          | 22.81          | -9.59         | 82.30          | 59.49       | PK  | Horizontal | PASS    |
| 6                   | 953.44          | 36.64          | 32.33          | -4.31         | 82.30          | 49.97       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

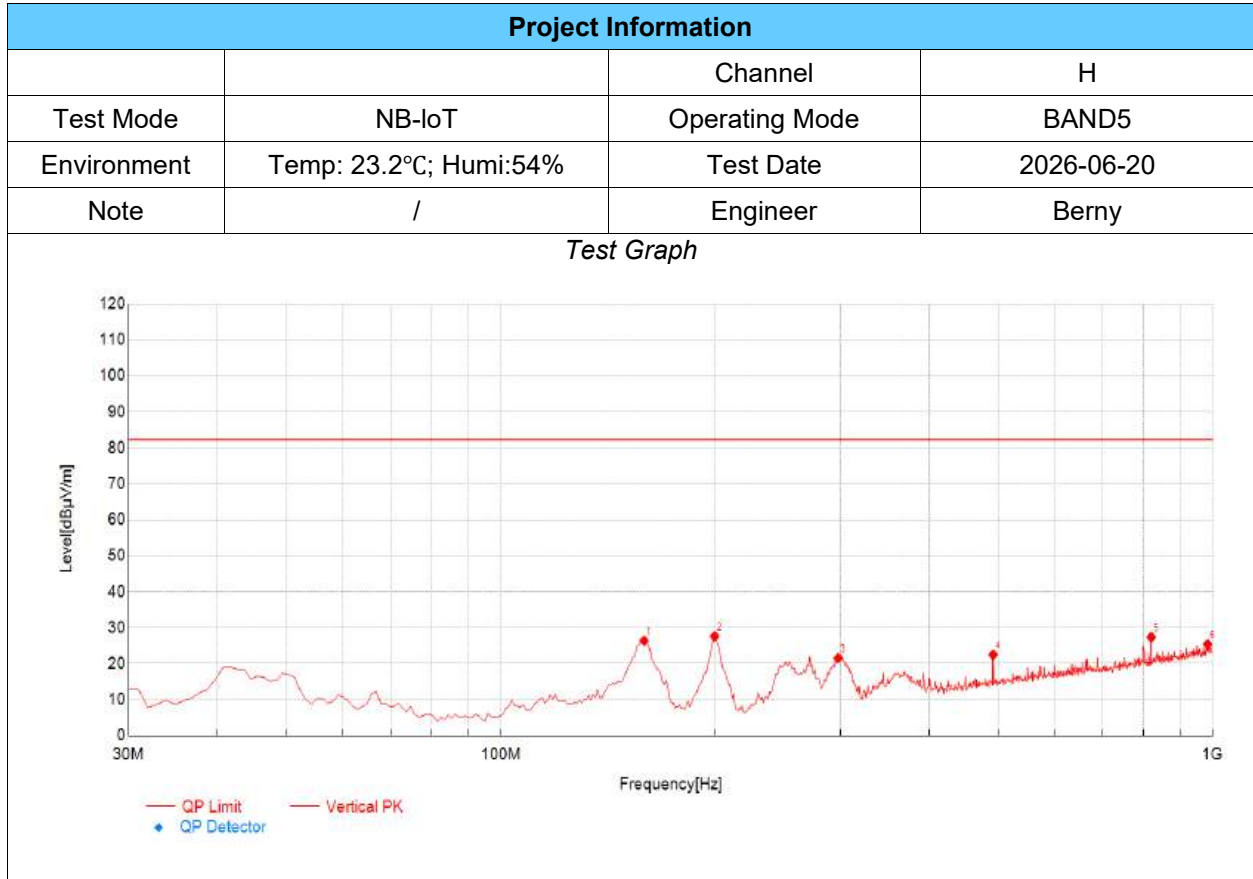

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 159.01          | 44.46          | 26.37          | -18.09        | 82.30          | 55.93       | PK  | Vertical | PASS    |
| 2                   | 199.75          | 49.96          | 27.64          | -22.32        | 82.30          | 54.66       | PK  | Vertical | PASS    |
| 3                   | 297.72          | 40.34          | 21.57          | -18.77        | 82.30          | 60.73       | PK  | Vertical | PASS    |
| 4                   | 491.72          | 35.77          | 22.49          | -13.28        | 82.30          | 59.81       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 34.30          | 27.39          | -6.91         | 82.30          | 54.91       | PK  | Vertical | PASS    |
| 6                   | 983.51          | 29.38          | 25.41          | -3.97         | 82.30          | 56.89       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

## TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | H          |
| Test Mode           | NB-IoT                 | Operating Mode | BAND5      |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

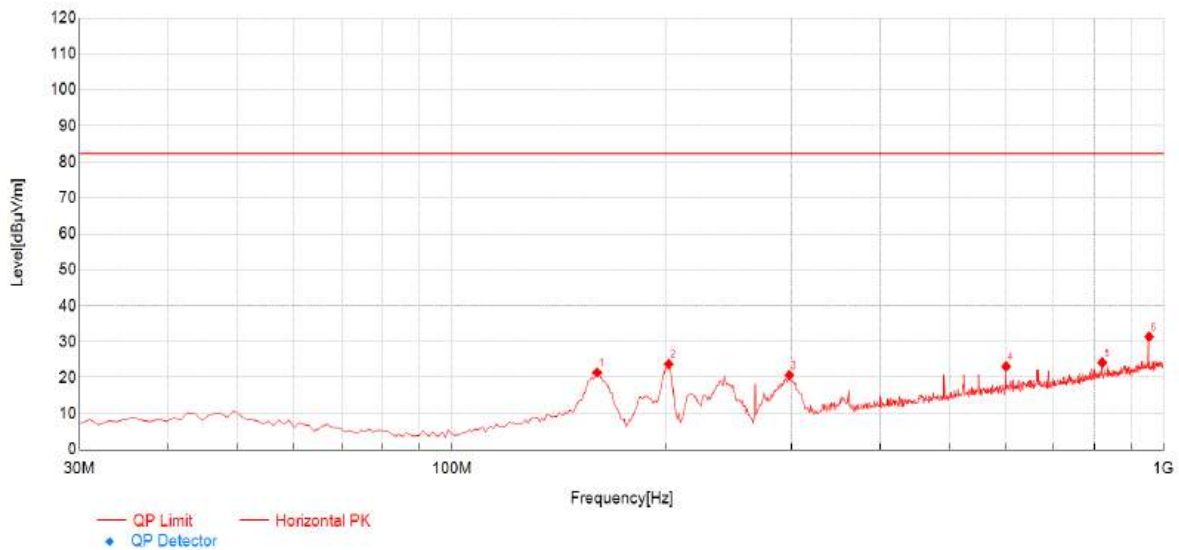


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 159.98          | 39.54          | 21.44          | -18.10        | 82.30          | 60.86       | PK  | Horizontal | PASS    |
| 2                   | 201.69          | 46.12          | 23.80          | -22.32        | 82.30          | 58.50       | PK  | Horizontal | PASS    |
| 3                   | 297.72          | 39.47          | 20.70          | -18.77        | 82.30          | 61.60       | PK  | Horizontal | PASS    |
| 4                   | 600.36          | 33.91          | 23.12          | -10.79        | 82.30          | 59.18       | PK  | Horizontal | PASS    |
| 5                   | 819.58          | 31.07          | 24.16          | -6.91         | 82.30          | 58.14       | PK  | Horizontal | PASS    |
| 6                   | 953.44          | 35.69          | 31.38          | -4.31         | 82.30          | 50.92       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

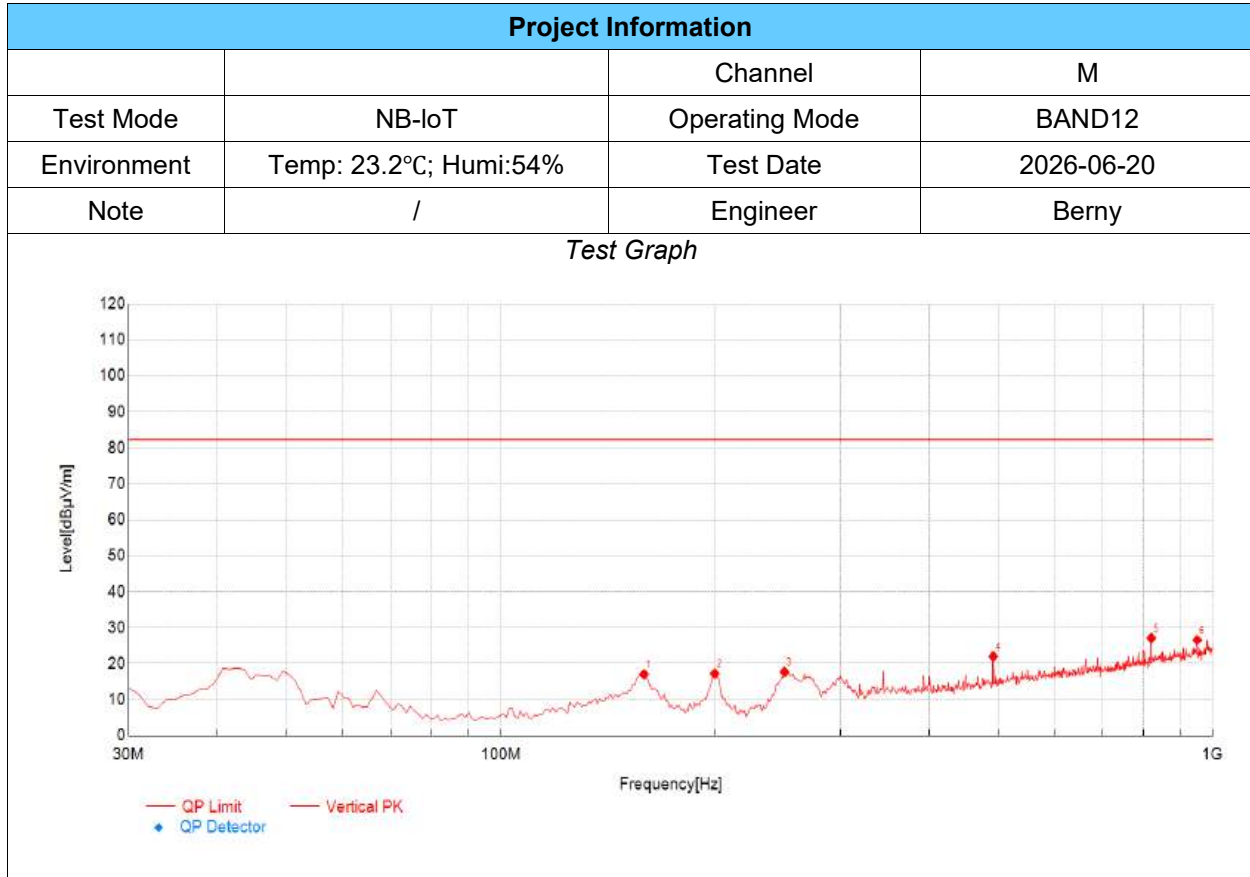

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 159.01          | 35.17          | 17.08          | -18.09        | 82.30          | 65.22       | PK  | Vertical | PASS    |
| 2                   | 199.75          | 39.58          | 17.26          | -22.32        | 82.30          | 65.04       | PK  | Vertical | PASS    |
| 3                   | 250.19          | 38.00          | 17.73          | -20.27        | 82.30          | 64.57       | PK  | Vertical | PASS    |
| 4                   | 491.72          | 35.33          | 22.05          | -13.28        | 82.30          | 60.25       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 34.04          | 27.13          | -6.91         | 82.30          | 55.17       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 30.88          | 26.56          | -4.32         | 82.30          | 55.74       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | M          |
| Test Mode           | NB-IoT                 | Operating Mode | BAND12     |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

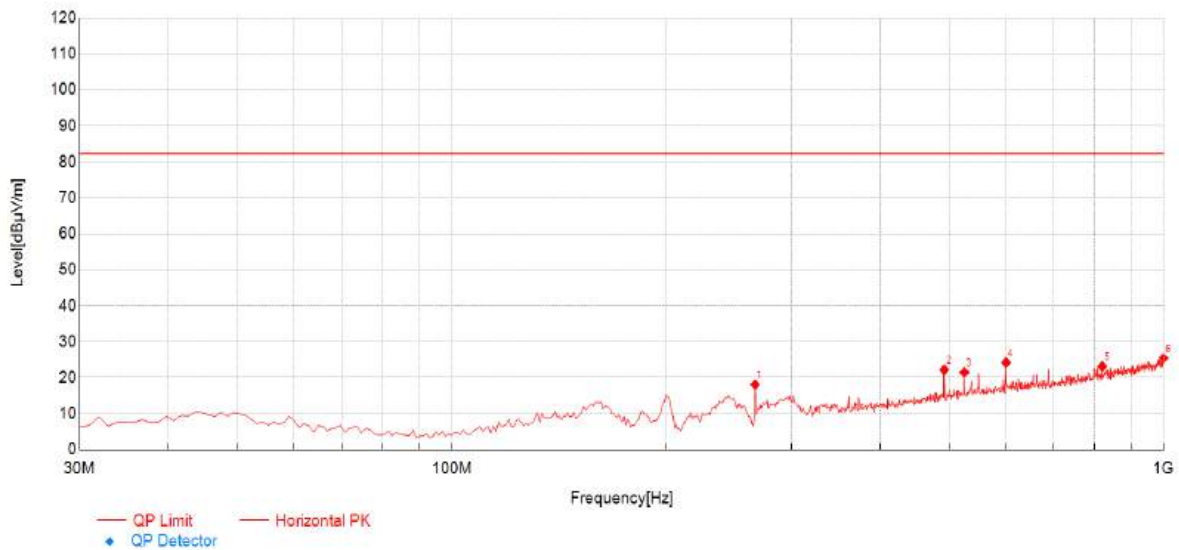


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 266.68          | 37.95          | 18.09          | -19.86        | 82.30          | 64.21       | PK  | Horizontal | PASS    |
| 2                   | 491.72          | 35.49          | 22.21          | -13.28        | 82.30          | 60.09       | PK  | Horizontal | PASS    |
| 3                   | 524.70          | 34.08          | 21.50          | -12.58        | 82.30          | 60.80       | PK  | Horizontal | PASS    |
| 4                   | 600.36          | 34.99          | 24.20          | -10.79        | 82.30          | 58.10       | PK  | Horizontal | PASS    |
| 5                   | 819.58          | 30.05          | 23.14          | -6.91         | 82.30          | 59.16       | PK  | Horizontal | PASS    |
| 6                   | 999.03          | 28.89          | 25.44          | -3.45         | 82.30          | 56.86       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

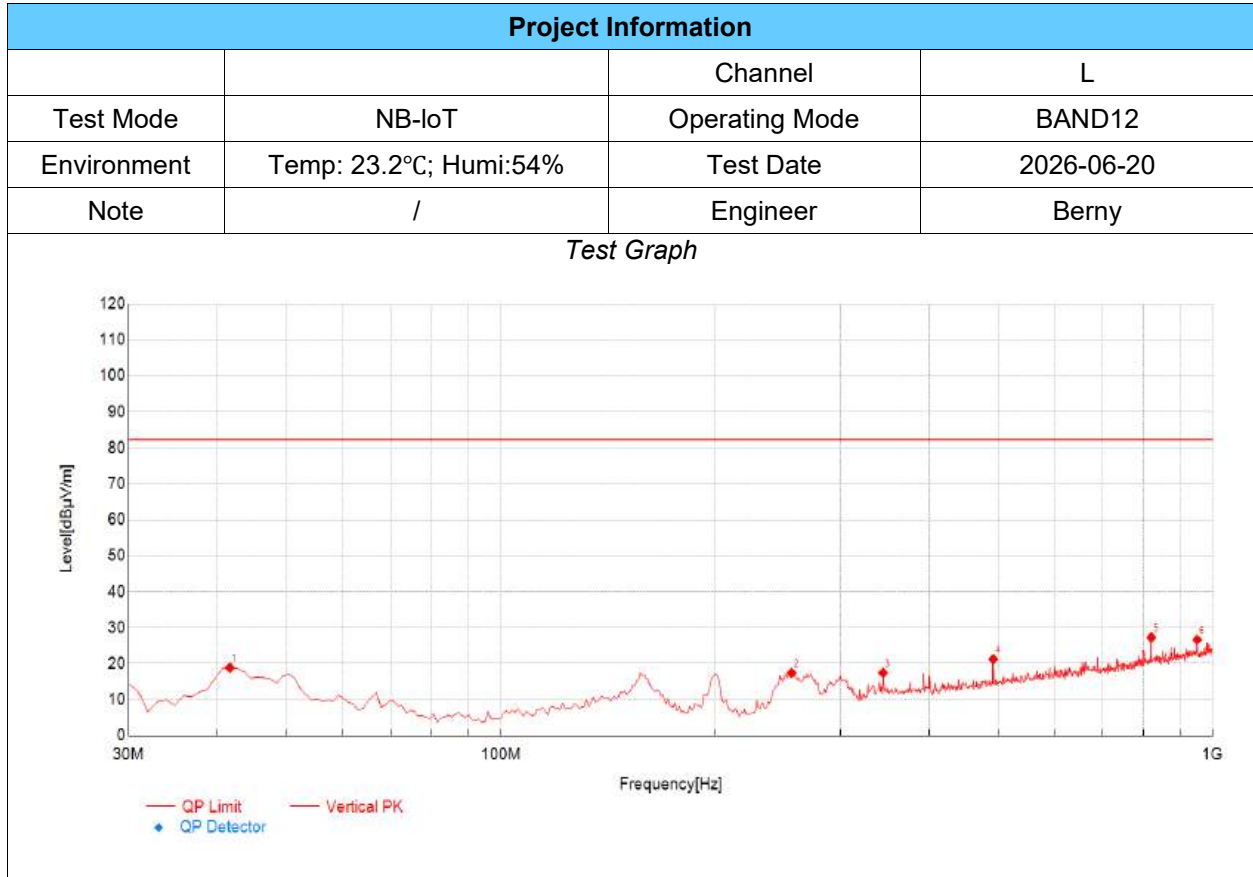

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 41.64           | 38.28          | 18.87          | -19.41        | 82.30          | 63.43       | PK  | Vertical | PASS    |
| 2                   | 256.01          | 37.57          | 17.41          | -20.16        | 82.30          | 64.89       | PK  | Vertical | PASS    |
| 3                   | 344.28          | 34.84          | 17.45          | -17.39        | 82.30          | 64.85       | PK  | Vertical | PASS    |
| 4                   | 491.72          | 34.54          | 21.26          | -13.28        | 82.30          | 61.04       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 34.23          | 27.32          | -6.91         | 82.30          | 54.98       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 30.96          | 26.64          | -4.32         | 82.30          | 55.66       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | L          |
| Test Mode           | NB-IoT                 | Operating Mode | BAND12     |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

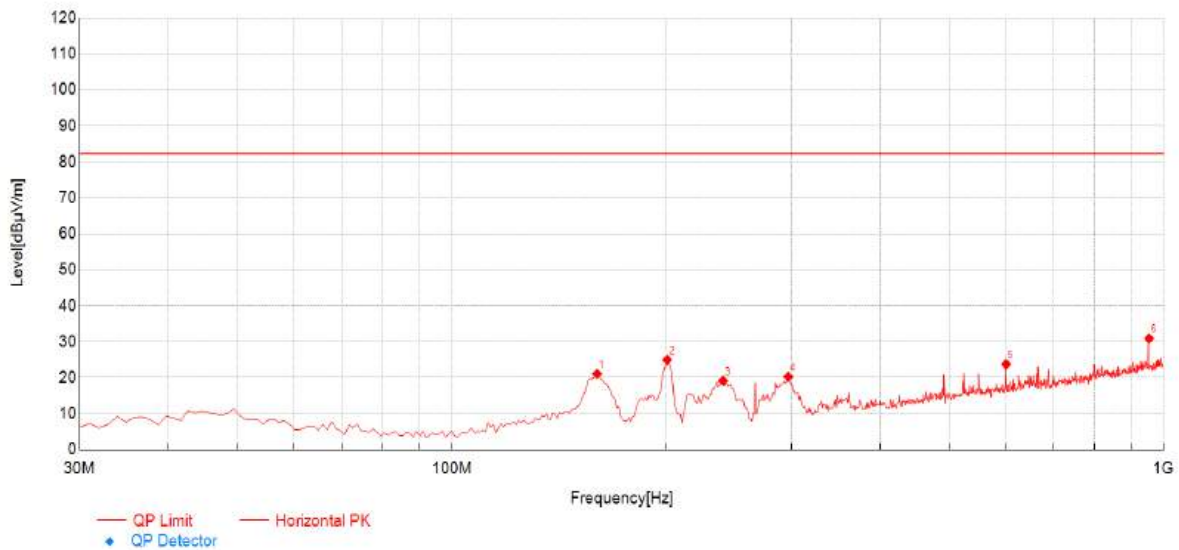


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 159.98          | 39.20          | 21.10          | -18.10        | 82.30          | 61.20       | PK  | Horizontal | PASS    |
| 2                   | 200.72          | 47.30          | 24.94          | -22.36        | 82.30          | 57.36       | PK  | Horizontal | PASS    |
| 3                   | 240.49          | 39.65          | 19.14          | -20.51        | 82.30          | 63.16       | PK  | Horizontal | PASS    |
| 4                   | 296.75          | 39.12          | 20.26          | -18.86        | 82.30          | 62.04       | PK  | Horizontal | PASS    |
| 5                   | 600.36          | 34.54          | 23.75          | -10.79        | 82.30          | 58.55       | PK  | Horizontal | PASS    |
| 6                   | 953.44          | 35.21          | 30.90          | -4.31         | 82.30          | 51.40       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

## TX Radiated Test Result

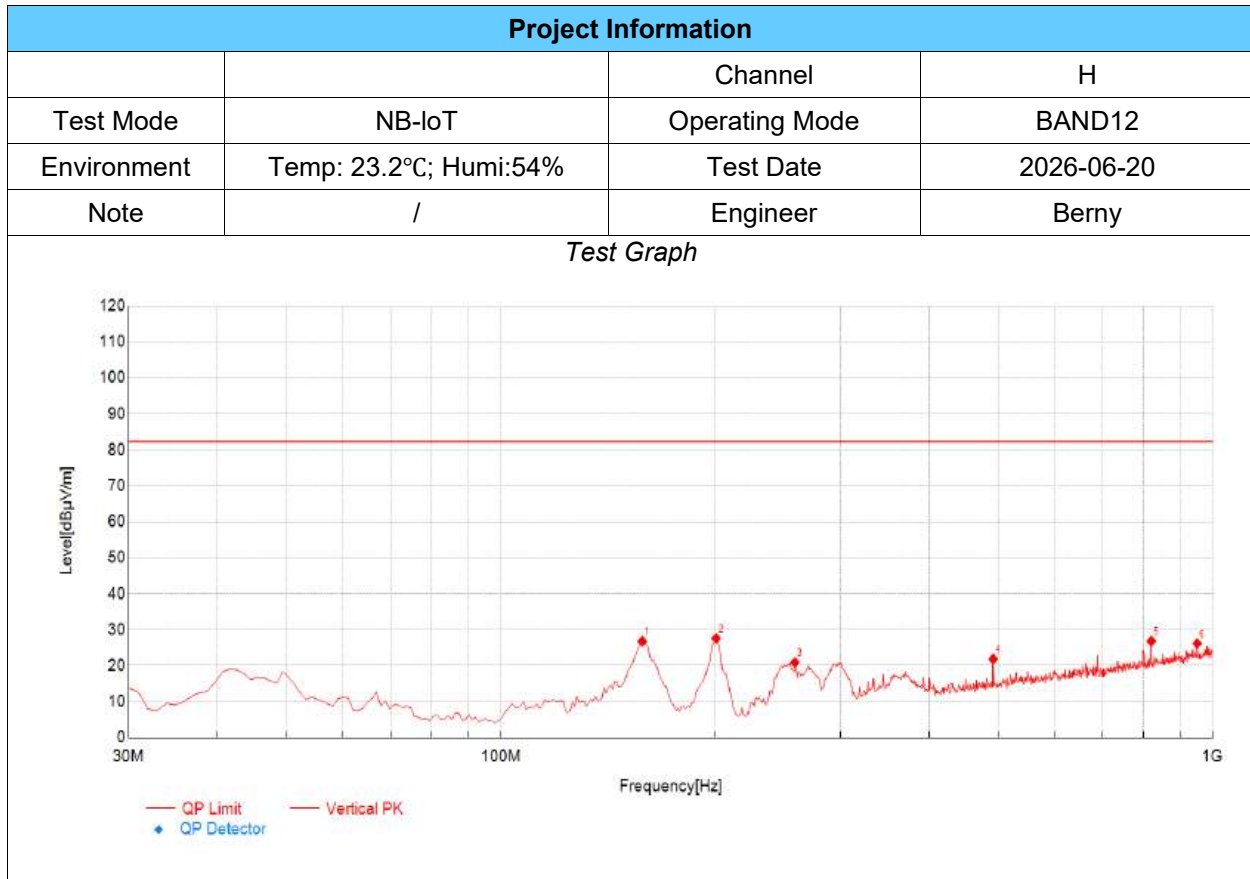

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 158.04          | 44.87          | 26.77          | -18.10        | 82.30          | 55.53       | PK  | Vertical | PASS    |
| 2                   | 200.72          | 49.96          | 27.60          | -22.36        | 82.30          | 54.70       | PK  | Vertical | PASS    |
| 3                   | 258.92          | 41.01          | 20.90          | -20.11        | 82.30          | 61.40       | PK  | Vertical | PASS    |
| 4                   | 491.72          | 35.16          | 21.88          | -13.28        | 82.30          | 60.42       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 33.74          | 26.83          | -6.91         | 82.30          | 55.47       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 30.48          | 26.16          | -4.32         | 82.30          | 56.14       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | H          |
| Test Mode           | NB-IoT                 | Operating Mode | BAND12     |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

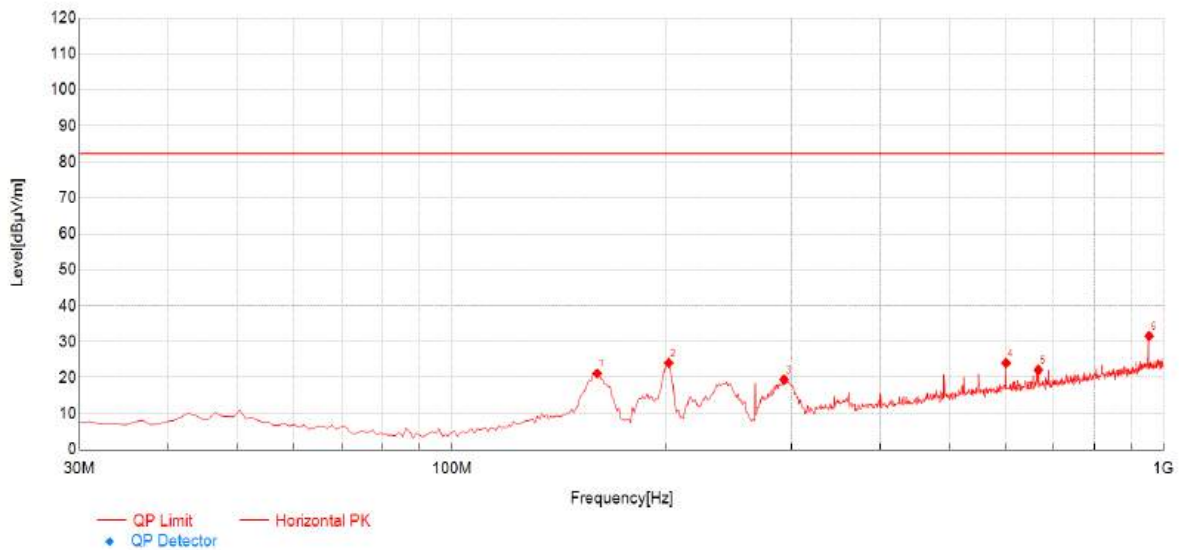


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 159.98          | 39.28          | 21.18          | -18.10        | 82.30          | 61.12       | PK  | Horizontal | PASS    |
| 2                   | 201.69          | 46.44          | 24.12          | -22.32        | 82.30          | 58.18       | PK  | Horizontal | PASS    |
| 3                   | 292.87          | 38.45          | 19.43          | -19.02        | 82.30          | 62.87       | PK  | Horizontal | PASS    |
| 4                   | 600.36          | 34.86          | 24.07          | -10.79        | 82.30          | 58.23       | PK  | Horizontal | PASS    |
| 5                   | 666.32          | 31.90          | 22.16          | -9.74         | 82.30          | 60.14       | PK  | Horizontal | PASS    |
| 6                   | 953.44          | 35.89          | 31.58          | -4.31         | 82.30          | 50.72       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

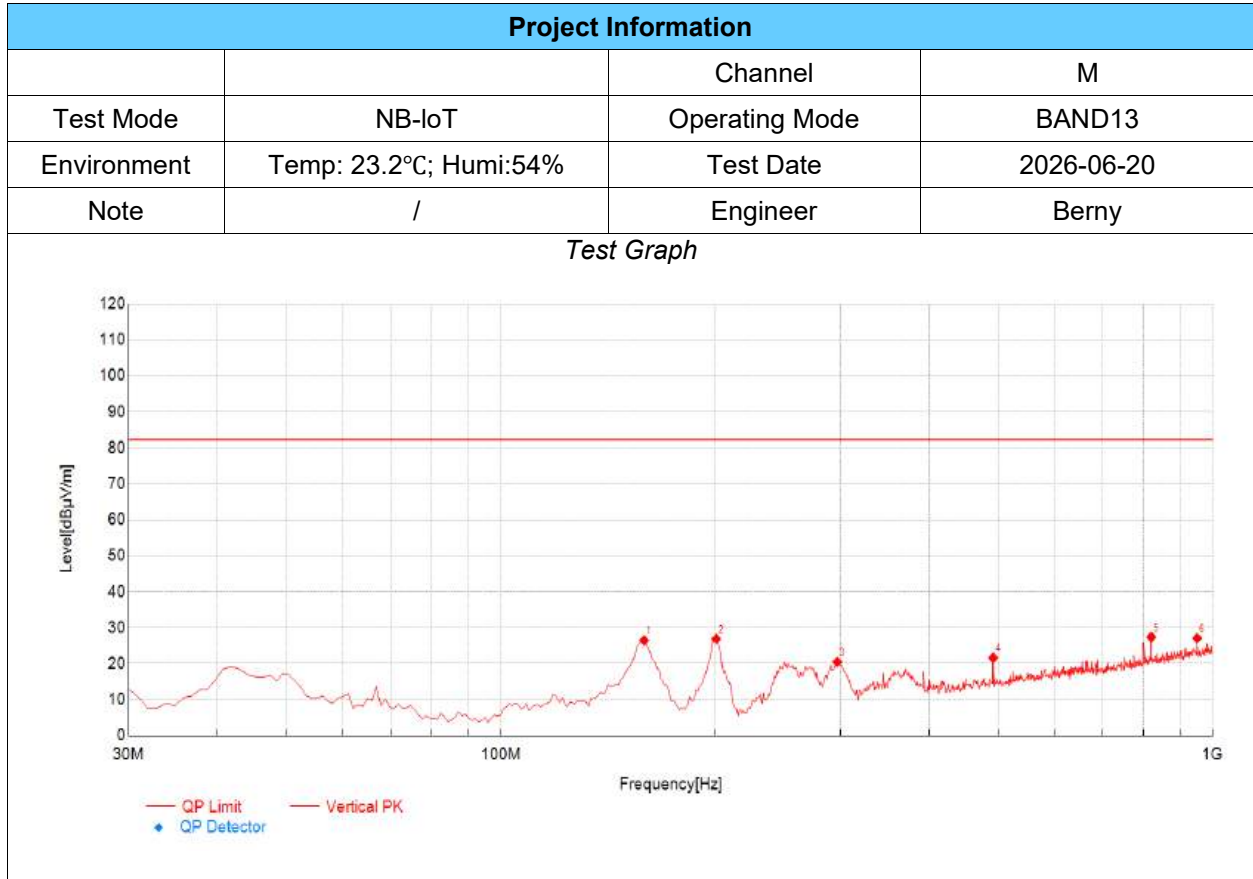


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 159.01          | 44.56          | 26.47          | -18.09        | 82.30          | 55.83       | PK  | Vertical | PASS    |
| 2                   | 200.72          | 49.26          | 26.90          | -22.36        | 82.30          | 55.40       | PK  | Vertical | PASS    |
| 3                   | 296.75          | 39.35          | 20.49          | -18.86        | 82.30          | 61.81       | PK  | Vertical | PASS    |
| 4                   | 491.72          | 34.92          | 21.64          | -13.28        | 82.30          | 60.66       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 34.33          | 27.42          | -6.91         | 82.30          | 54.88       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 31.40          | 27.08          | -4.32         | 82.30          | 55.22       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

## TX Radiated Test Result

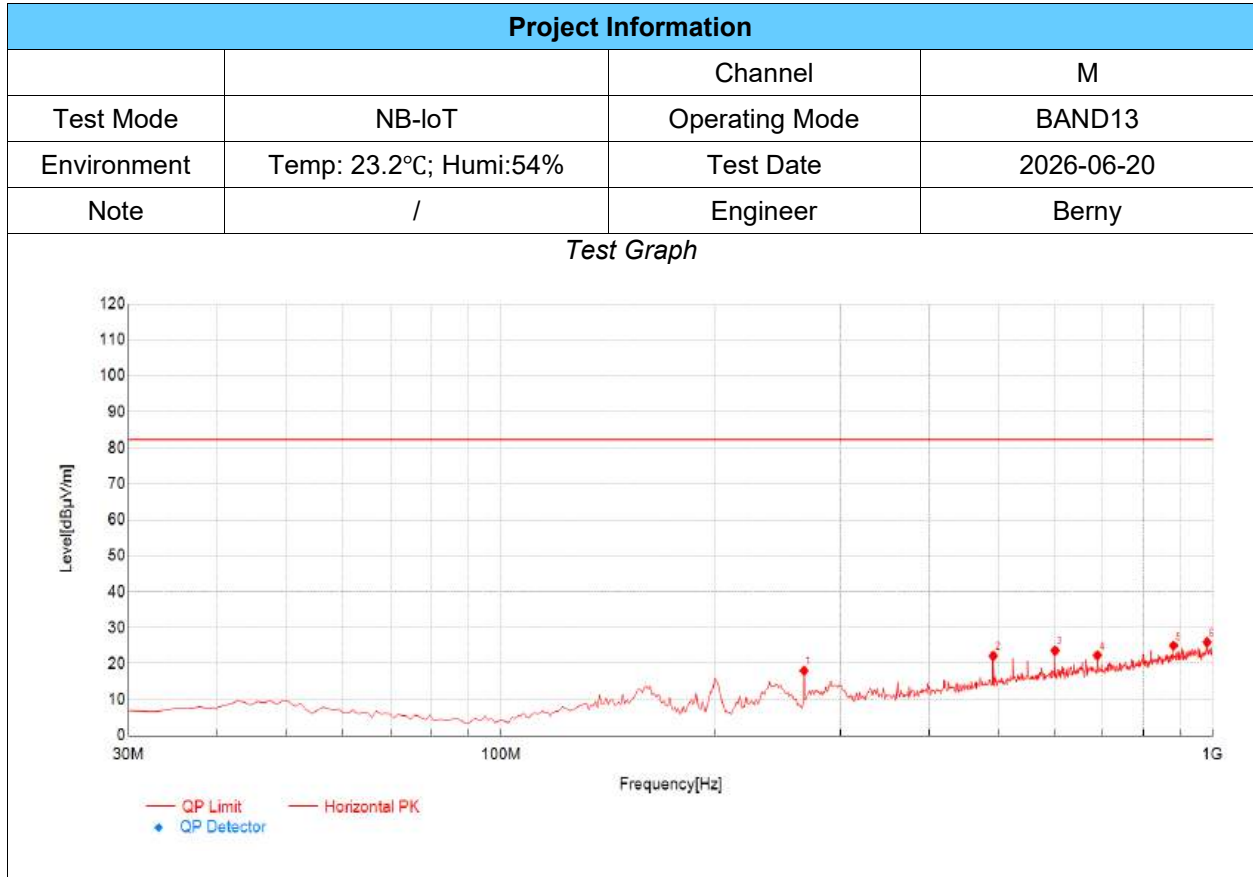


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 266.68          | 37.90          | 18.04          | -19.86        | 82.30          | 64.26       | PK  | Horizontal | PASS    |
| 2                   | 491.72          | 35.46          | 22.18          | -13.28        | 82.30          | 60.12       | PK  | Horizontal | PASS    |
| 3                   | 600.36          | 34.42          | 23.63          | -10.79        | 82.30          | 58.67       | PK  | Horizontal | PASS    |
| 4                   | 688.63          | 31.92          | 22.33          | -9.59         | 82.30          | 59.97       | PK  | Horizontal | PASS    |
| 5                   | 880.69          | 30.53          | 25.00          | -5.53         | 82.30          | 57.30       | PK  | Horizontal | PASS    |
| 6                   | 981.57          | 29.95          | 25.95          | -4.00         | 82.30          | 56.35       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

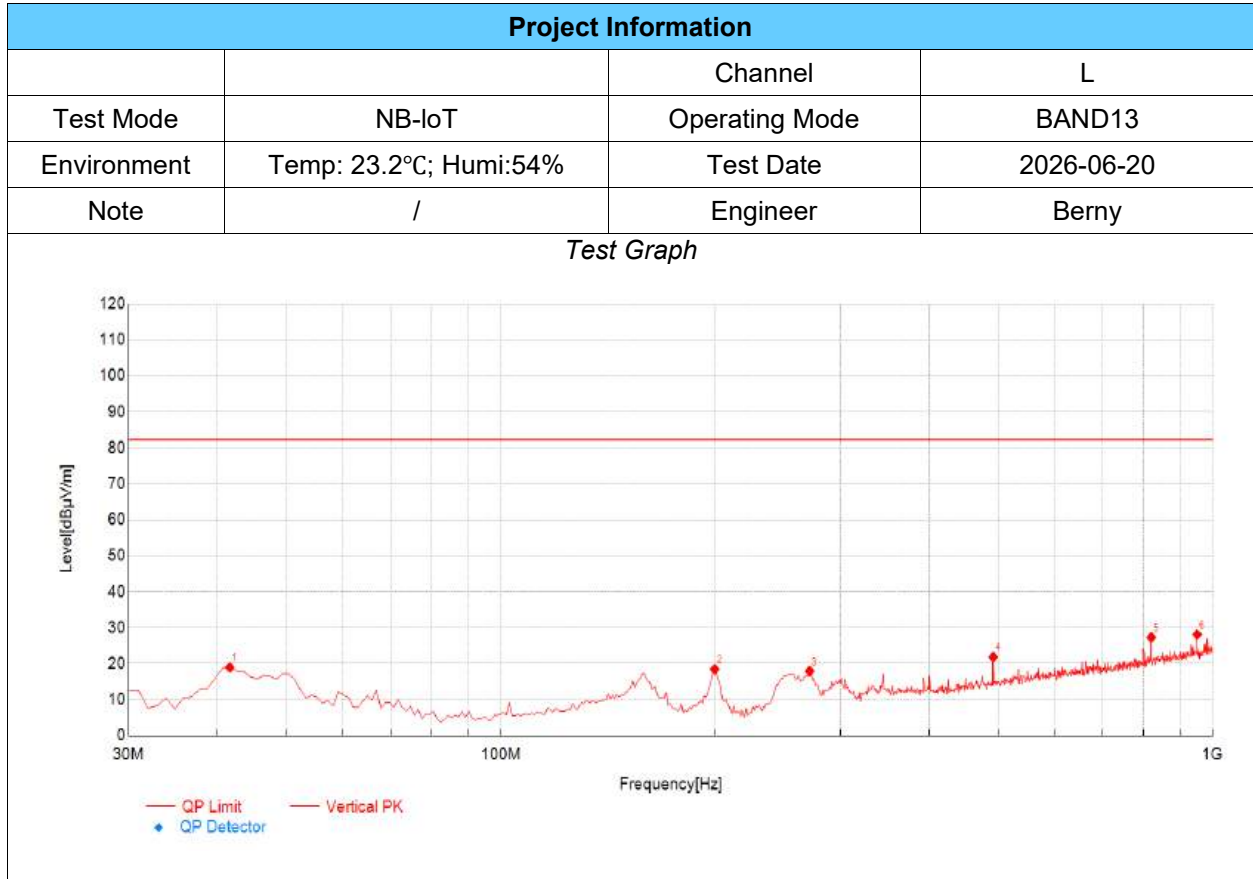


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 41.64           | 38.37          | 18.96          | -19.41        | 82.30          | 63.34       | PK  | Vertical | PASS    |
| 2                   | 199.75          | 40.80          | 18.48          | -22.32        | 82.30          | 63.82       | PK  | Vertical | PASS    |
| 3                   | 271.53          | 37.67          | 17.96          | -19.71        | 82.30          | 64.34       | PK  | Vertical | PASS    |
| 4                   | 491.72          | 35.14          | 21.86          | -13.28        | 82.30          | 60.44       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 34.25          | 27.34          | -6.91         | 82.30          | 54.96       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 32.44          | 28.12          | -4.32         | 82.30          | 54.18       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

## TX Radiated Test Result

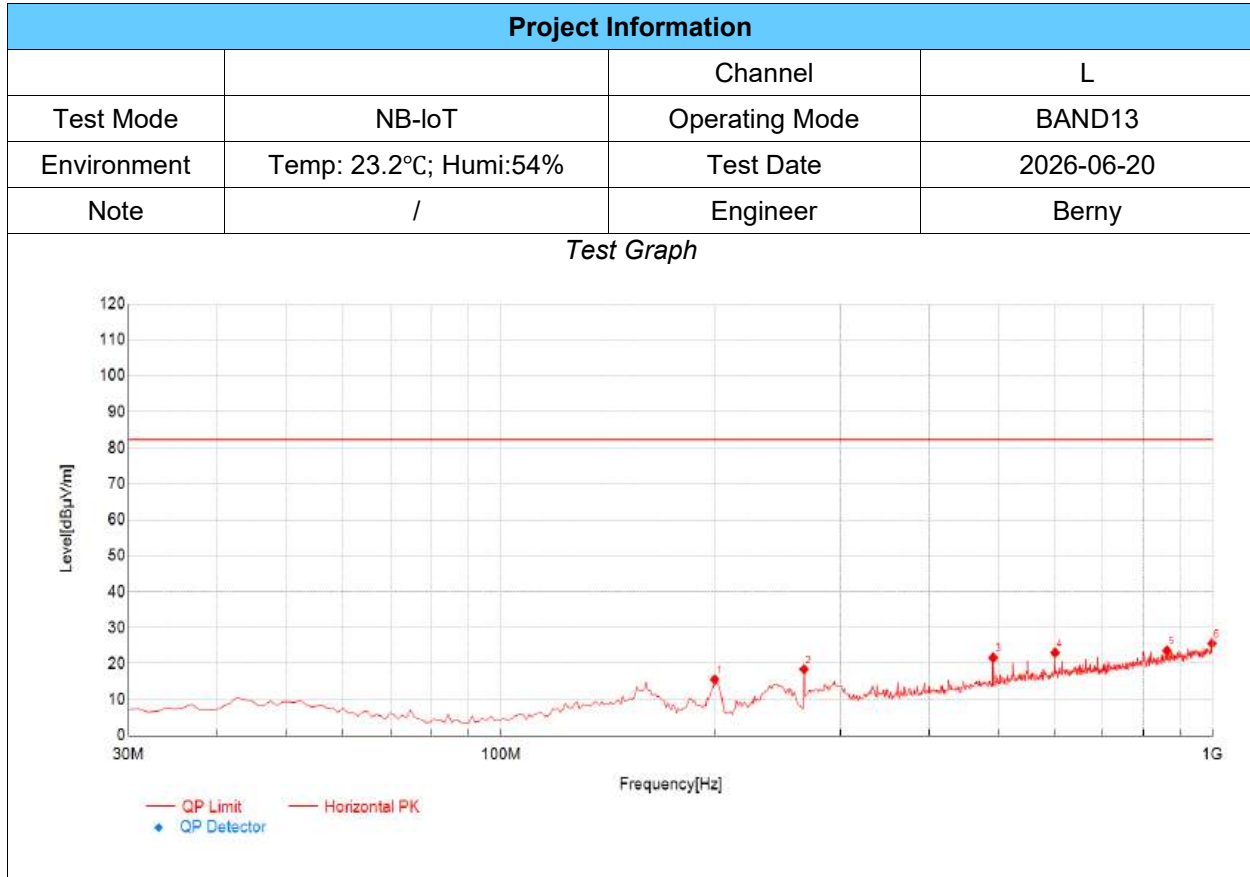


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 199.75          | 37.92          | 15.60          | -22.32        | 82.30          | 66.70       | PK  | Horizontal | PASS    |
| 2                   | 266.68          | 38.29          | 18.43          | -19.86        | 82.30          | 63.87       | PK  | Horizontal | PASS    |
| 3                   | 491.72          | 34.95          | 21.67          | -13.28        | 82.30          | 60.63       | PK  | Horizontal | PASS    |
| 4                   | 600.36          | 33.85          | 23.06          | -10.79        | 82.30          | 59.24       | PK  | Horizontal | PASS    |
| 5                   | 862.26          | 29.59          | 23.59          | -6.00         | 82.30          | 58.71       | PK  | Horizontal | PASS    |
| 6                   | 997.09          | 29.17          | 25.63          | -3.54         | 82.30          | 56.67       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

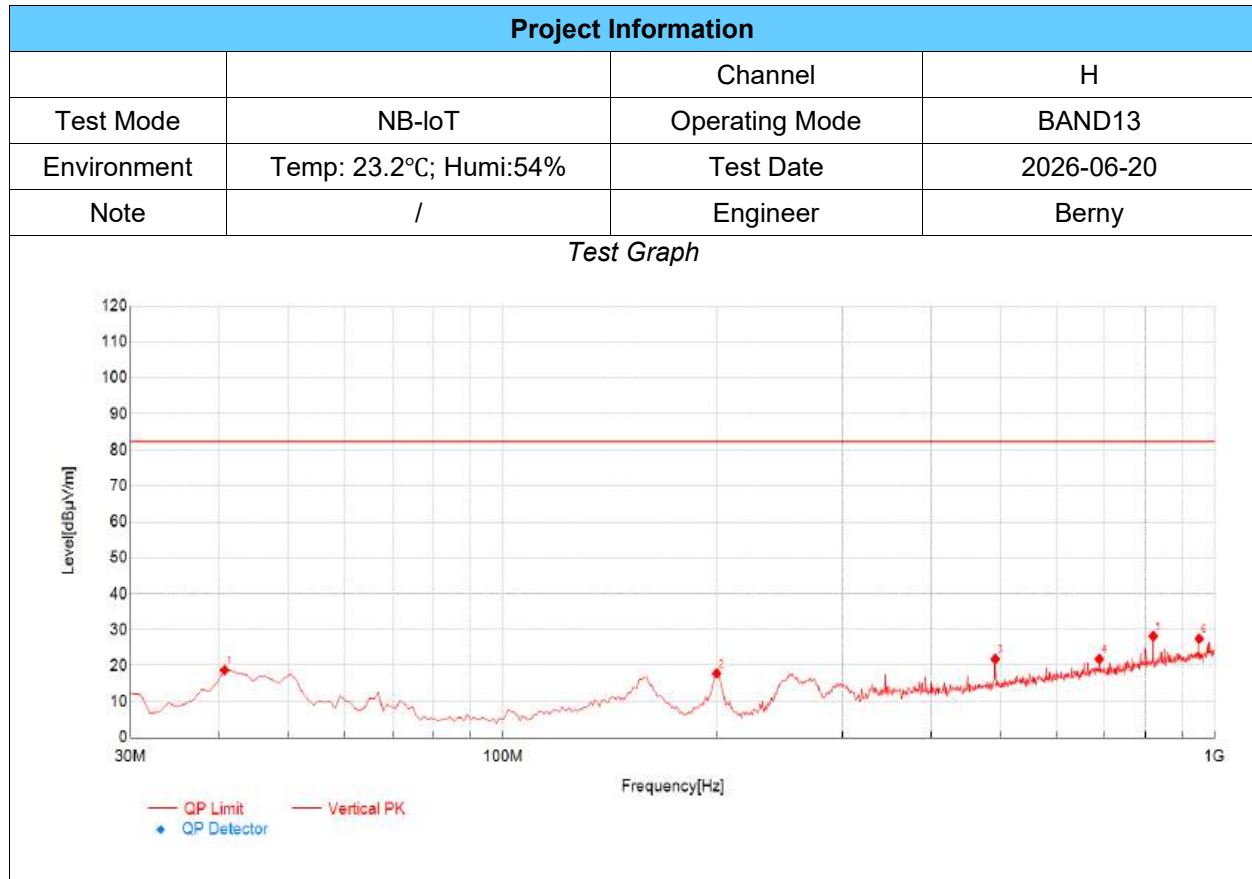

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 40.67           | 38.30          | 18.78          | -19.52        | 82.30          | 63.52       | PK  | Vertical | PASS    |
| 2                   | 199.75          | 40.16          | 17.84          | -22.32        | 82.30          | 64.46       | PK  | Vertical | PASS    |
| 3                   | 491.72          | 35.14          | 21.86          | -13.28        | 82.30          | 60.44       | PK  | Vertical | PASS    |
| 4                   | 688.63          | 31.44          | 21.85          | -9.59         | 82.30          | 60.45       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 35.12          | 28.21          | -6.91         | 82.30          | 54.09       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 31.80          | 27.48          | -4.32         | 82.30          | 54.82       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | H          |
| Test Mode           | NB-IoT                 | Operating Mode | BAND13     |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

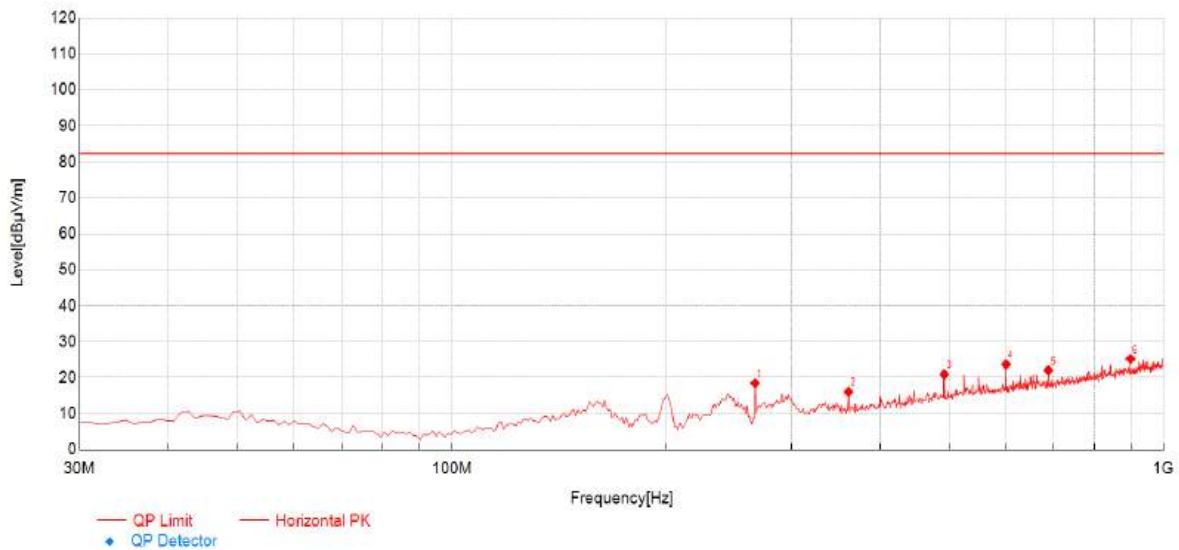

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 266.68          | 38.30          | 18.44          | -19.86        | 82.30          | 63.86       | PK  | Horizontal | PASS    |
| 2                   | 360.77          | 32.97          | 16.06          | -16.91        | 82.30          | 66.24       | PK  | Horizontal | PASS    |
| 3                   | 491.72          | 34.20          | 20.92          | -13.28        | 82.30          | 61.38       | PK  | Horizontal | PASS    |
| 4                   | 600.36          | 34.51          | 23.72          | -10.79        | 82.30          | 58.58       | PK  | Horizontal | PASS    |
| 5                   | 688.63          | 31.66          | 22.07          | -9.59         | 82.30          | 60.23       | PK  | Horizontal | PASS    |
| 6                   | 898.15          | 30.47          | 25.21          | -5.26         | 82.30          | 57.09       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | M          |
| Test Mode           | NB-IoT                 | Operating Mode | BAND17     |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

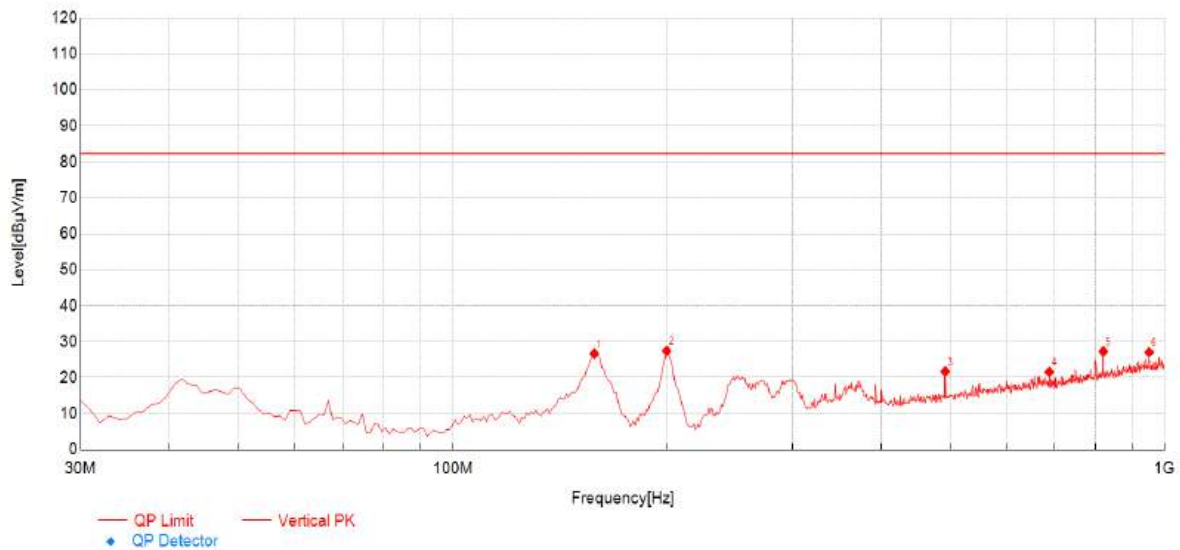


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 158.04          | 44.79          | 26.69          | -18.10        | 82.30          | 55.61       | PK  | Vertical | PASS    |
| 2                   | 199.75          | 49.78          | 27.46          | -22.32        | 82.30          | 54.84       | PK  | Vertical | PASS    |
| 3                   | 491.72          | 35.03          | 21.75          | -13.28        | 82.30          | 60.55       | PK  | Vertical | PASS    |
| 4                   | 688.63          | 31.20          | 21.61          | -9.59         | 82.30          | 60.69       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 34.22          | 27.31          | -6.91         | 82.30          | 54.99       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 31.39          | 27.07          | -4.32         | 82.30          | 55.23       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

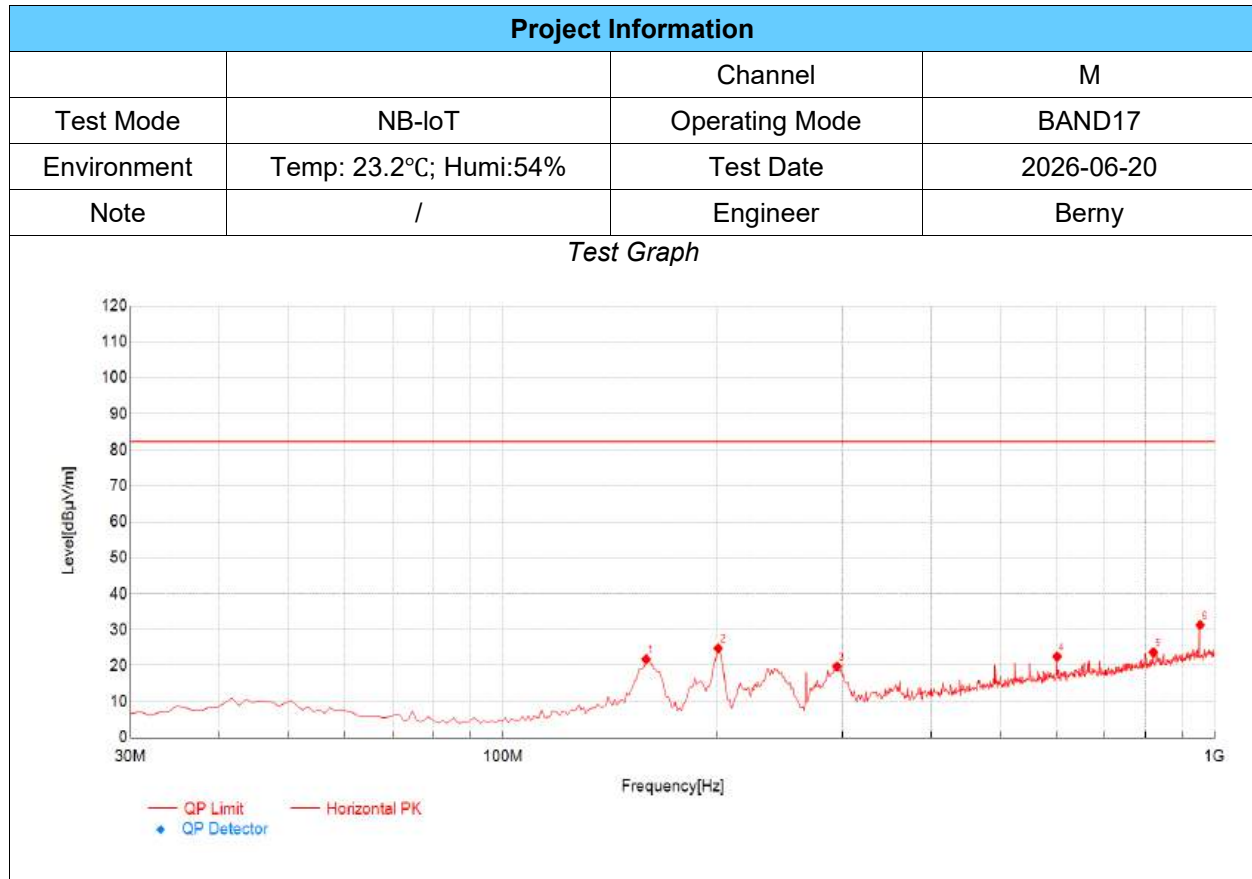


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 159.01          | 39.89          | 21.80          | -18.09        | 82.30          | 60.50       | PK  | Horizontal | PASS    |
| 2                   | 200.72          | 47.13          | 24.77          | -22.36        | 82.30          | 57.53       | PK  | Horizontal | PASS    |
| 3                   | 294.81          | 38.76          | 19.81          | -18.95        | 82.30          | 62.49       | PK  | Horizontal | PASS    |
| 4                   | 600.36          | 33.33          | 22.54          | -10.79        | 82.30          | 59.76       | PK  | Horizontal | PASS    |
| 5                   | 819.58          | 30.61          | 23.70          | -6.91         | 82.30          | 58.60       | PK  | Horizontal | PASS    |
| 6                   | 953.44          | 35.59          | 31.28          | -4.31         | 82.30          | 51.02       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

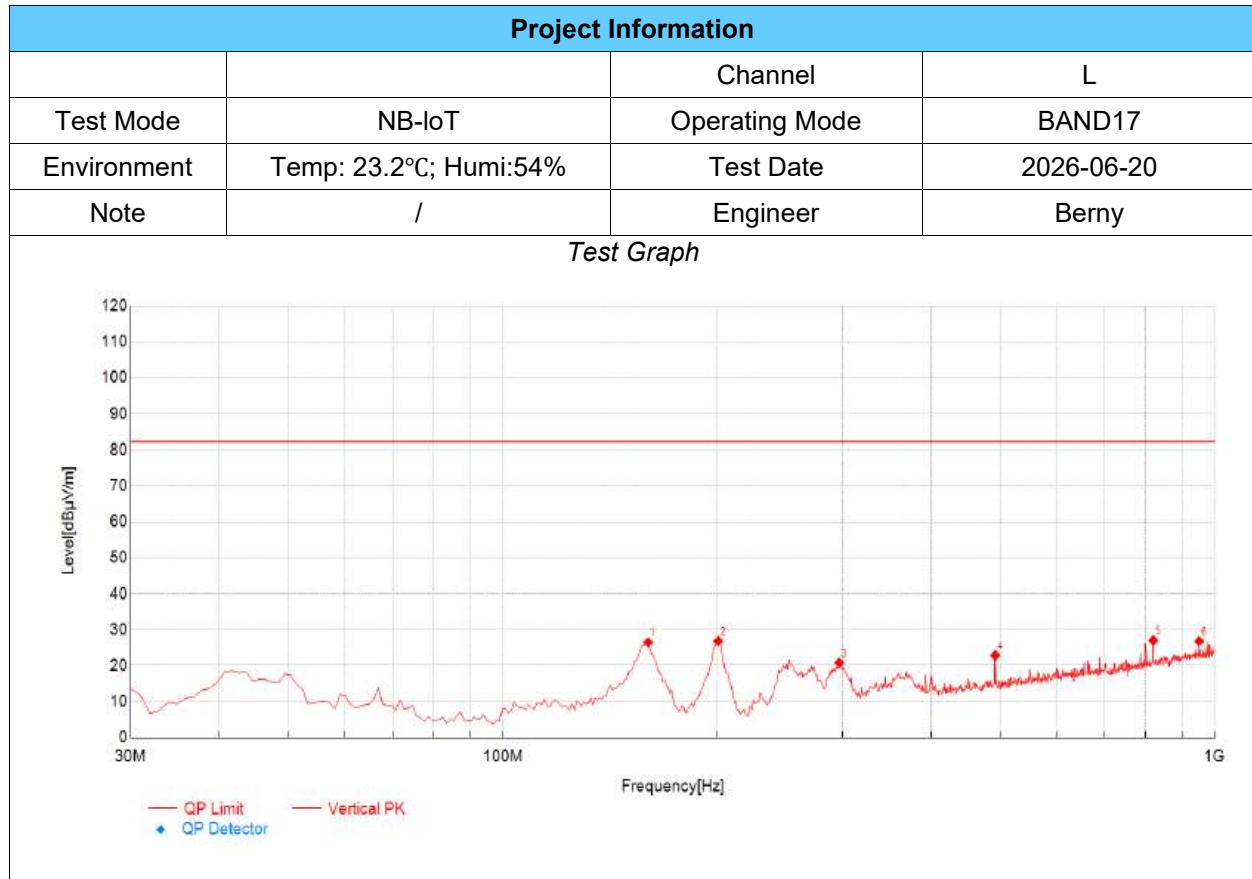

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 159.98          | 44.60          | 26.50          | -18.10        | 82.30          | 55.80       | PK  | Vertical | PASS    |
| 2                   | 200.72          | 49.22          | 26.86          | -22.36        | 82.30          | 55.44       | PK  | Vertical | PASS    |
| 3                   | 296.75          | 39.67          | 20.81          | -18.86        | 82.30          | 61.49       | PK  | Vertical | PASS    |
| 4                   | 491.72          | 36.16          | 22.88          | -13.28        | 82.30          | 59.42       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 33.94          | 27.03          | -6.91         | 82.30          | 55.27       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 31.13          | 26.81          | -4.32         | 82.30          | 55.49       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | L          |
| Test Mode           | NB-IoT                 | Operating Mode | BAND17     |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

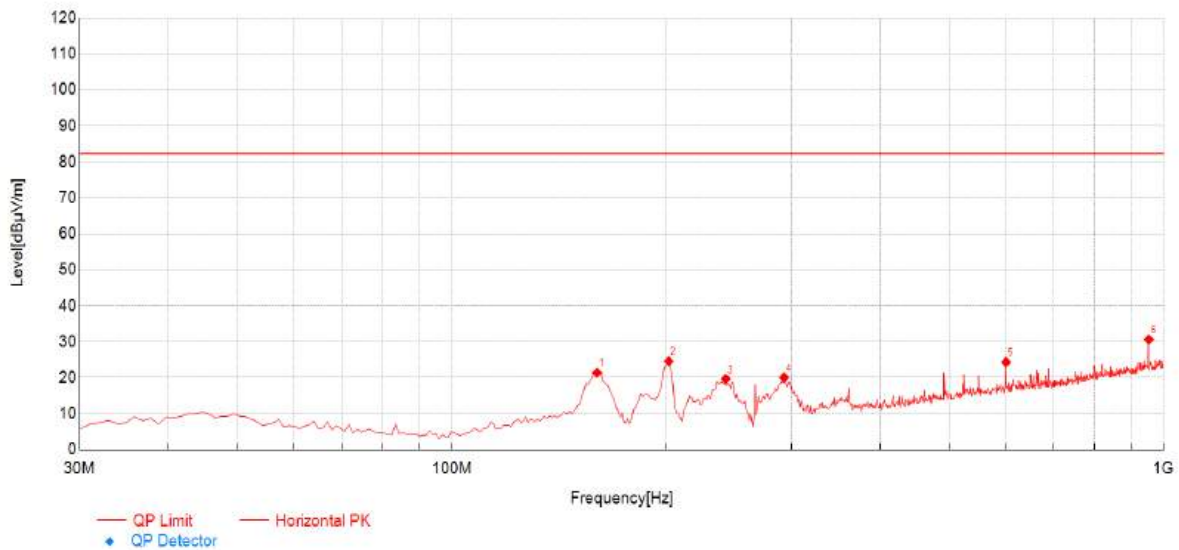


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 159.98          | 39.49          | 21.39          | -18.10        | 82.30          | 60.91       | PK  | Horizontal | PASS    |
| 2                   | 201.69          | 46.89          | 24.57          | -22.32        | 82.30          | 57.73       | PK  | Horizontal | PASS    |
| 3                   | 242.43          | 40.09          | 19.66          | -20.43        | 82.30          | 62.64       | PK  | Horizontal | PASS    |
| 4                   | 292.87          | 39.07          | 20.05          | -19.02        | 82.30          | 62.25       | PK  | Horizontal | PASS    |
| 5                   | 600.36          | 35.10          | 24.31          | -10.79        | 82.30          | 57.99       | PK  | Horizontal | PASS    |
| 6                   | 952.47          | 34.95          | 30.60          | -4.35         | 82.30          | 51.70       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

## TX Radiated Test Result

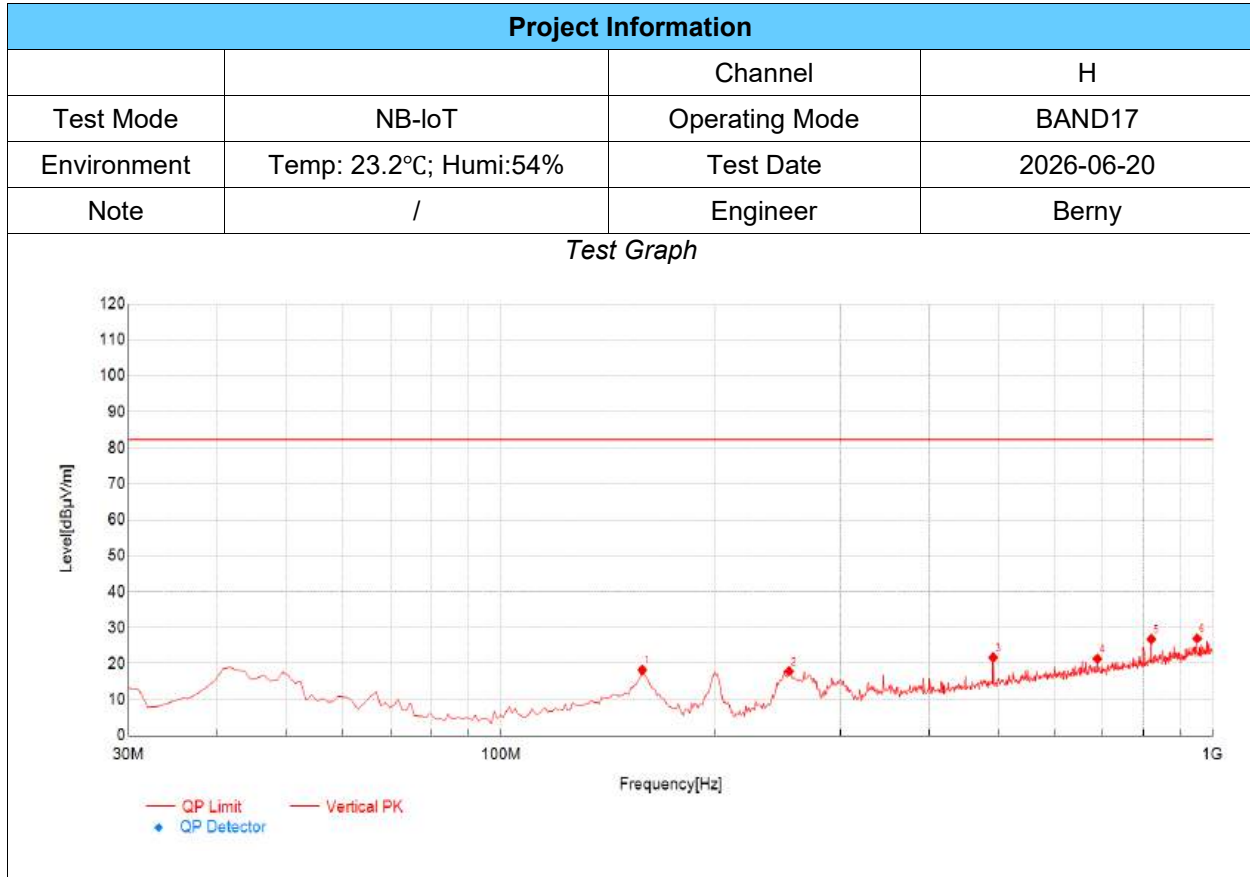

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 158.04          | 36.34          | 18.24          | -18.10        | 82.30          | 64.06       | PK  | Vertical | PASS    |
| 2                   | 254.07          | 38.13          | 17.91          | -20.22        | 82.30          | 64.39       | PK  | Vertical | PASS    |
| 3                   | 491.72          | 35.01          | 21.73          | -13.28        | 82.30          | 60.57       | PK  | Vertical | PASS    |
| 4                   | 688.63          | 30.97          | 21.38          | -9.59         | 82.30          | 60.92       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 33.74          | 26.83          | -6.91         | 82.30          | 55.47       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 31.31          | 26.99          | -4.32         | 82.30          | 55.31       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | H          |
| Test Mode           | NB-IoT                 | Operating Mode | BAND17     |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

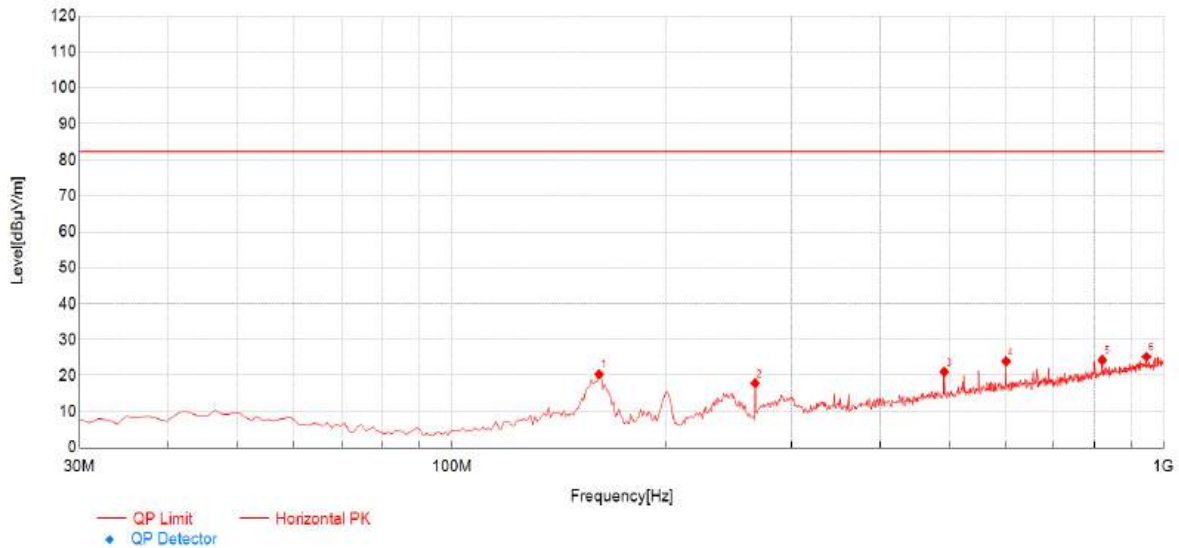


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 160.95          | 38.66          | 20.41          | -18.25        | 82.30          | 61.89       | PK  | Horizontal | PASS    |
| 2                   | 266.68          | 37.78          | 17.92          | -19.86        | 82.30          | 64.38       | PK  | Horizontal | PASS    |
| 3                   | 491.72          | 34.35          | 21.07          | -13.28        | 82.30          | 61.23       | PK  | Horizontal | PASS    |
| 4                   | 600.36          | 34.77          | 23.98          | -10.79        | 82.30          | 58.32       | PK  | Horizontal | PASS    |
| 5                   | 819.58          | 31.22          | 24.31          | -6.91         | 82.30          | 57.99       | PK  | Horizontal | PASS    |
| 6                   | 945.68          | 29.49          | 25.25          | -4.24         | 82.30          | 57.05       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

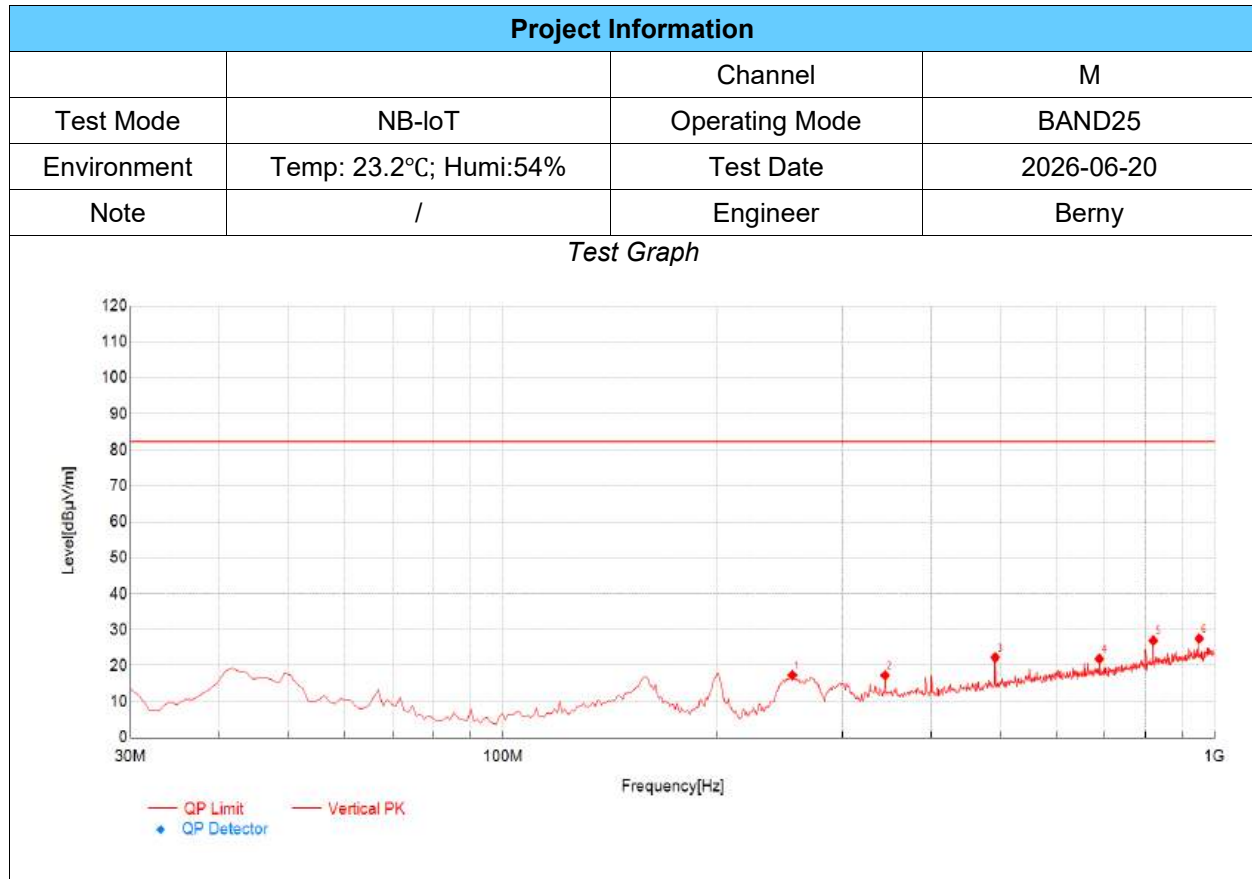


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 255.04          | 37.57          | 17.39          | -20.18        | 82.30          | 64.91       | PK  | Vertical | PASS    |
| 2                   | 344.28          | 34.70          | 17.31          | -17.39        | 82.30          | 64.99       | PK  | Vertical | PASS    |
| 3                   | 491.72          | 35.59          | 22.31          | -13.28        | 82.30          | 59.99       | PK  | Vertical | PASS    |
| 4                   | 688.63          | 31.51          | 21.92          | -9.59         | 82.30          | 60.38       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 33.88          | 26.97          | -6.91         | 82.30          | 55.33       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 31.86          | 27.54          | -4.32         | 82.30          | 54.76       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

## TX Radiated Test Result

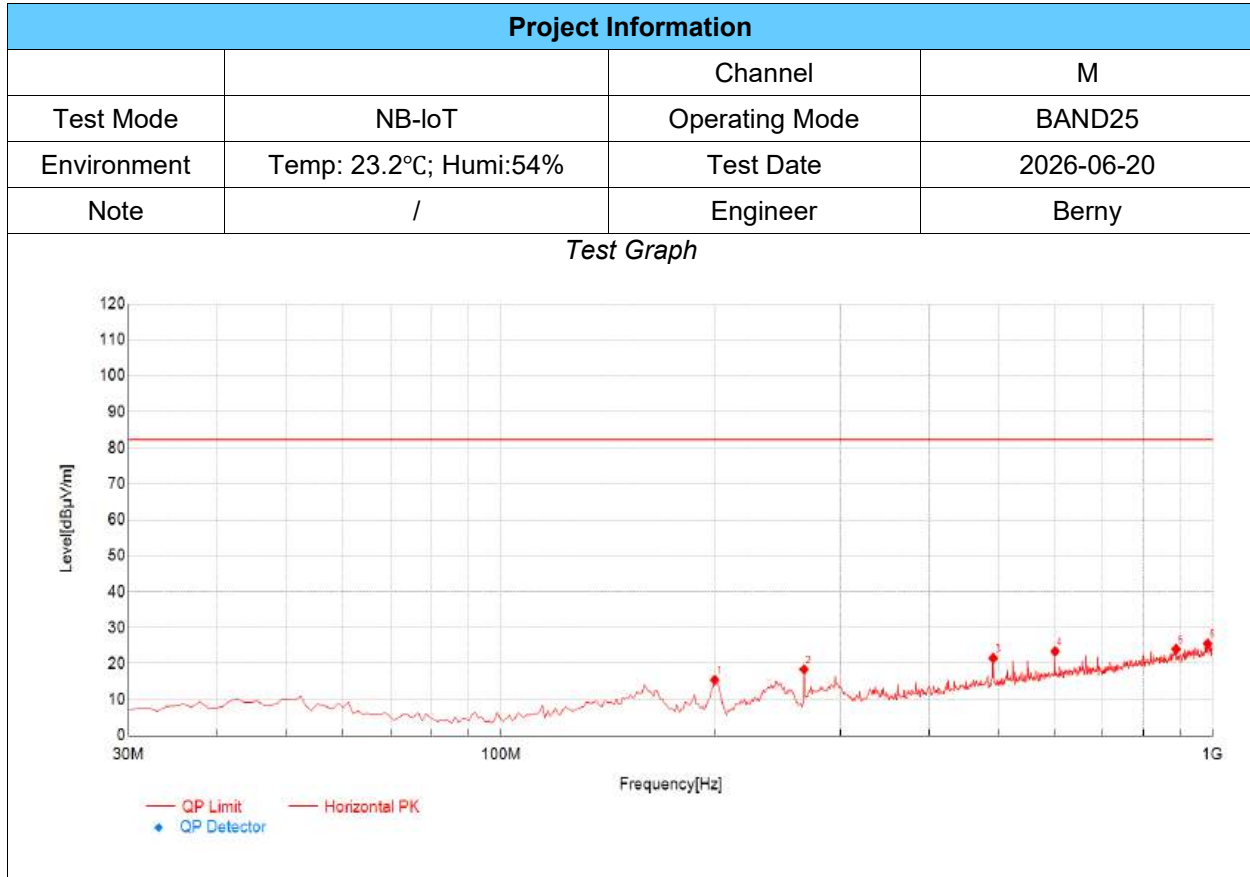


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 199.75          | 37.84          | 15.52          | -22.32        | 82.30          | 66.78       | PK  | Horizontal | PASS    |
| 2                   | 266.68          | 38.25          | 18.39          | -19.86        | 82.30          | 63.91       | PK  | Horizontal | PASS    |
| 3                   | 491.72          | 34.81          | 21.53          | -13.28        | 82.30          | 60.77       | PK  | Horizontal | PASS    |
| 4                   | 600.36          | 34.22          | 23.43          | -10.79        | 82.30          | 58.87       | PK  | Horizontal | PASS    |
| 5                   | 888.45          | 29.39          | 24.02          | -5.37         | 82.30          | 58.28       | PK  | Horizontal | PASS    |
| 6                   | 983.51          | 29.54          | 25.57          | -3.97         | 82.30          | 56.73       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

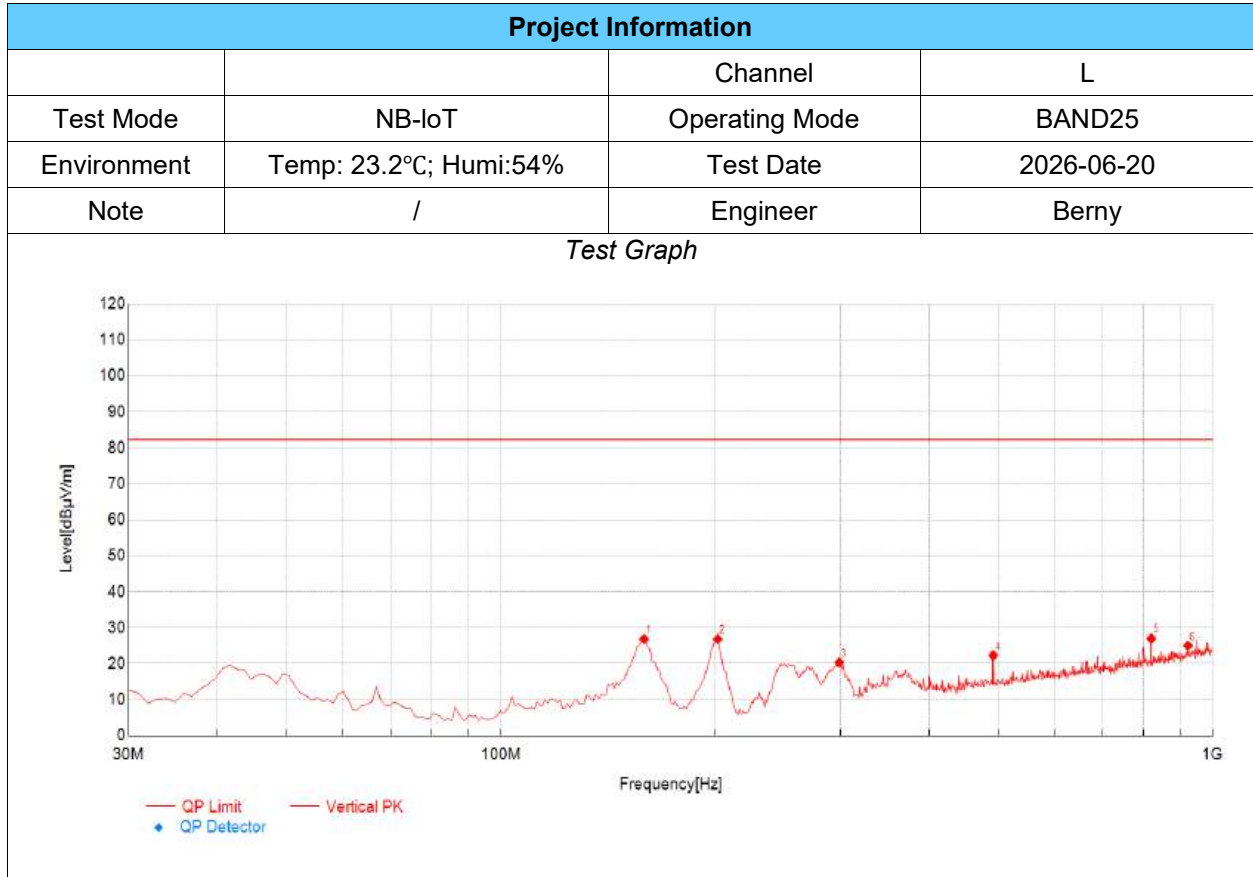


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 159.01          | 44.92          | 26.83          | -18.09        | 82.30          | 55.47       | PK  | Vertical | PASS    |
| 2                   | 201.69          | 49.15          | 26.83          | -22.32        | 82.30          | 55.47       | PK  | Vertical | PASS    |
| 3                   | 298.69          | 39.07          | 20.36          | -18.71        | 82.30          | 61.94       | PK  | Vertical | PASS    |
| 4                   | 491.72          | 35.60          | 22.32          | -13.28        | 82.30          | 59.98       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 33.88          | 26.97          | -6.91         | 82.30          | 55.33       | PK  | Vertical | PASS    |
| 6                   | 922.40          | 29.87          | 24.99          | -4.88         | 82.30          | 57.31       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

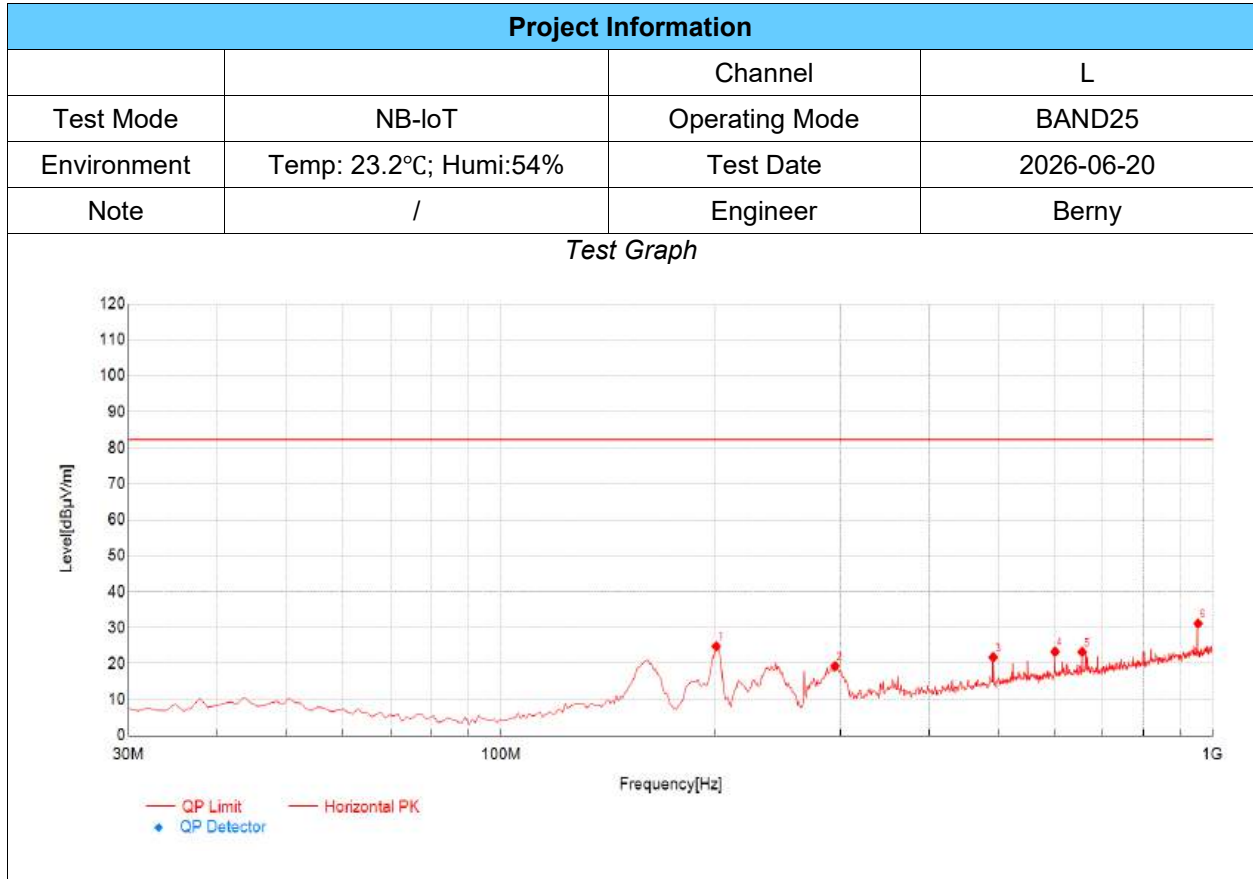


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 200.72          | 47.15          | 24.79          | -22.36        | 82.30          | 57.51       | PK  | Horizontal | PASS    |
| 2                   | 294.81          | 38.27          | 19.32          | -18.95        | 82.30          | 62.98       | PK  | Horizontal | PASS    |
| 3                   | 491.72          | 35.07          | 21.79          | -13.28        | 82.30          | 60.51       | PK  | Horizontal | PASS    |
| 4                   | 600.36          | 34.12          | 23.33          | -10.79        | 82.30          | 58.97       | PK  | Horizontal | PASS    |
| 5                   | 655.65          | 33.18          | 23.27          | -9.91         | 82.30          | 59.03       | PK  | Horizontal | PASS    |
| 6                   | 953.44          | 35.47          | 31.16          | -4.31         | 82.30          | 51.14       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

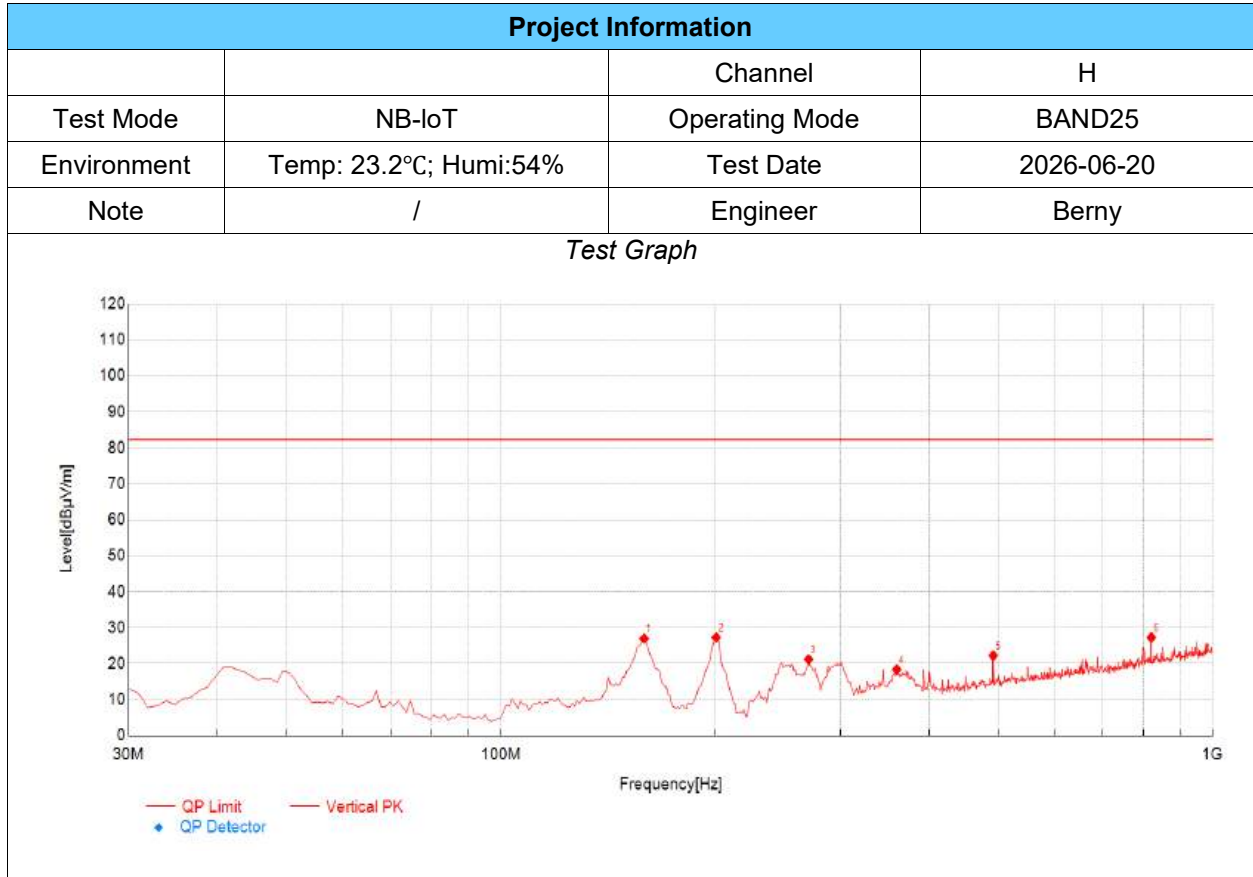

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 159.01          | 45.07          | 26.98          | -18.09        | 82.30          | 55.32       | PK  | Vertical | PASS    |
| 2                   | 200.72          | 49.69          | 27.33          | -22.36        | 82.30          | 54.97       | PK  | Vertical | PASS    |
| 3                   | 270.56          | 41.00          | 21.22          | -19.78        | 82.30          | 61.08       | PK  | Vertical | PASS    |
| 4                   | 359.80          | 35.31          | 18.37          | -16.94        | 82.30          | 63.93       | PK  | Vertical | PASS    |
| 5                   | 491.72          | 35.55          | 22.27          | -13.28        | 82.30          | 60.03       | PK  | Vertical | PASS    |
| 6                   | 819.58          | 34.22          | 27.31          | -6.91         | 82.30          | 54.99       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | H          |
| Test Mode           | NB-IoT                 | Operating Mode | BAND25     |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

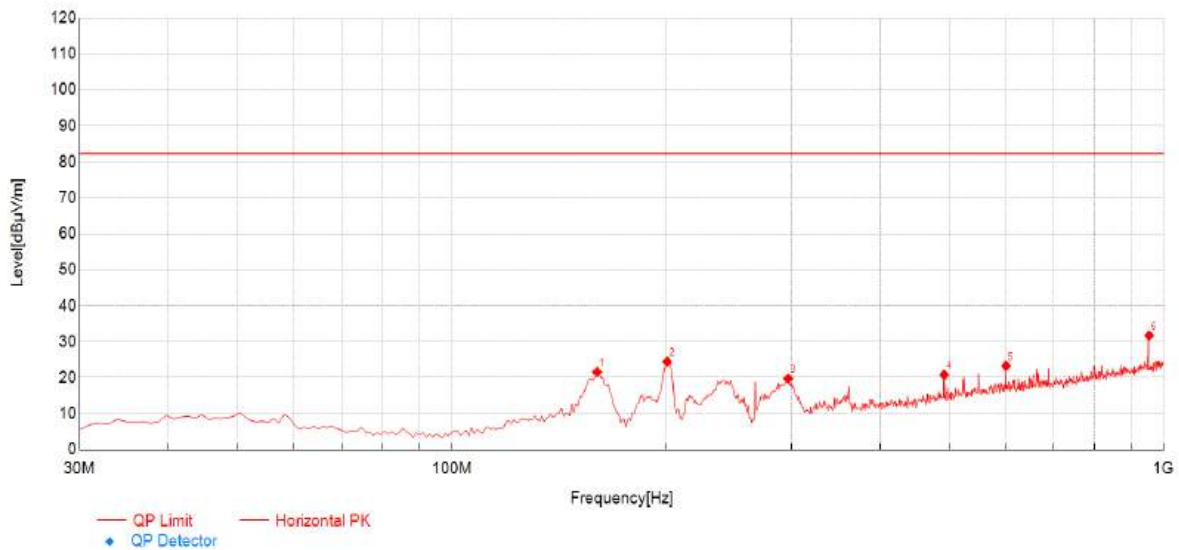


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 159.98          | 39.69          | 21.59          | -18.10        | 82.30          | 60.71       | PK  | Horizontal | PASS    |
| 2                   | 200.72          | 46.80          | 24.44          | -22.36        | 82.30          | 57.86       | PK  | Horizontal | PASS    |
| 3                   | 296.75          | 38.60          | 19.74          | -18.86        | 82.30          | 62.56       | PK  | Horizontal | PASS    |
| 4                   | 491.72          | 34.08          | 20.80          | -13.28        | 82.30          | 61.50       | PK  | Horizontal | PASS    |
| 5                   | 600.36          | 34.09          | 23.30          | -10.79        | 82.30          | 59.00       | PK  | Horizontal | PASS    |
| 6                   | 953.44          | 36.01          | 31.70          | -4.31         | 82.30          | 50.60       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

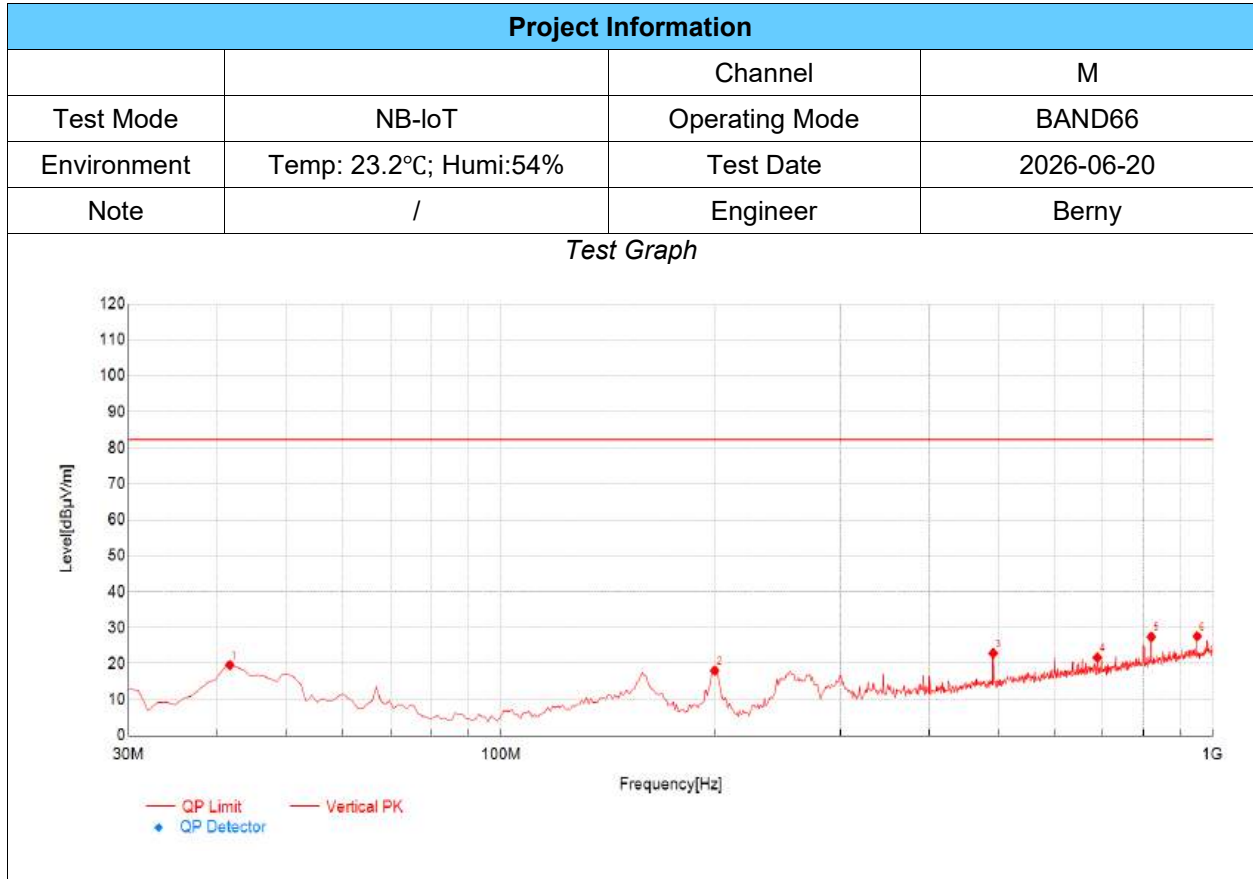


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 41.64           | 39.04          | 19.63          | -19.41        | 82.30          | 62.67       | PK  | Vertical | PASS    |
| 2                   | 199.75          | 40.39          | 18.07          | -22.32        | 82.30          | 64.23       | PK  | Vertical | PASS    |
| 3                   | 491.72          | 36.19          | 22.91          | -13.28        | 82.30          | 59.39       | PK  | Vertical | PASS    |
| 4                   | 688.63          | 31.30          | 21.71          | -9.59         | 82.30          | 60.59       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 34.36          | 27.45          | -6.91         | 82.30          | 54.85       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 31.95          | 27.63          | -4.32         | 82.30          | 54.67       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

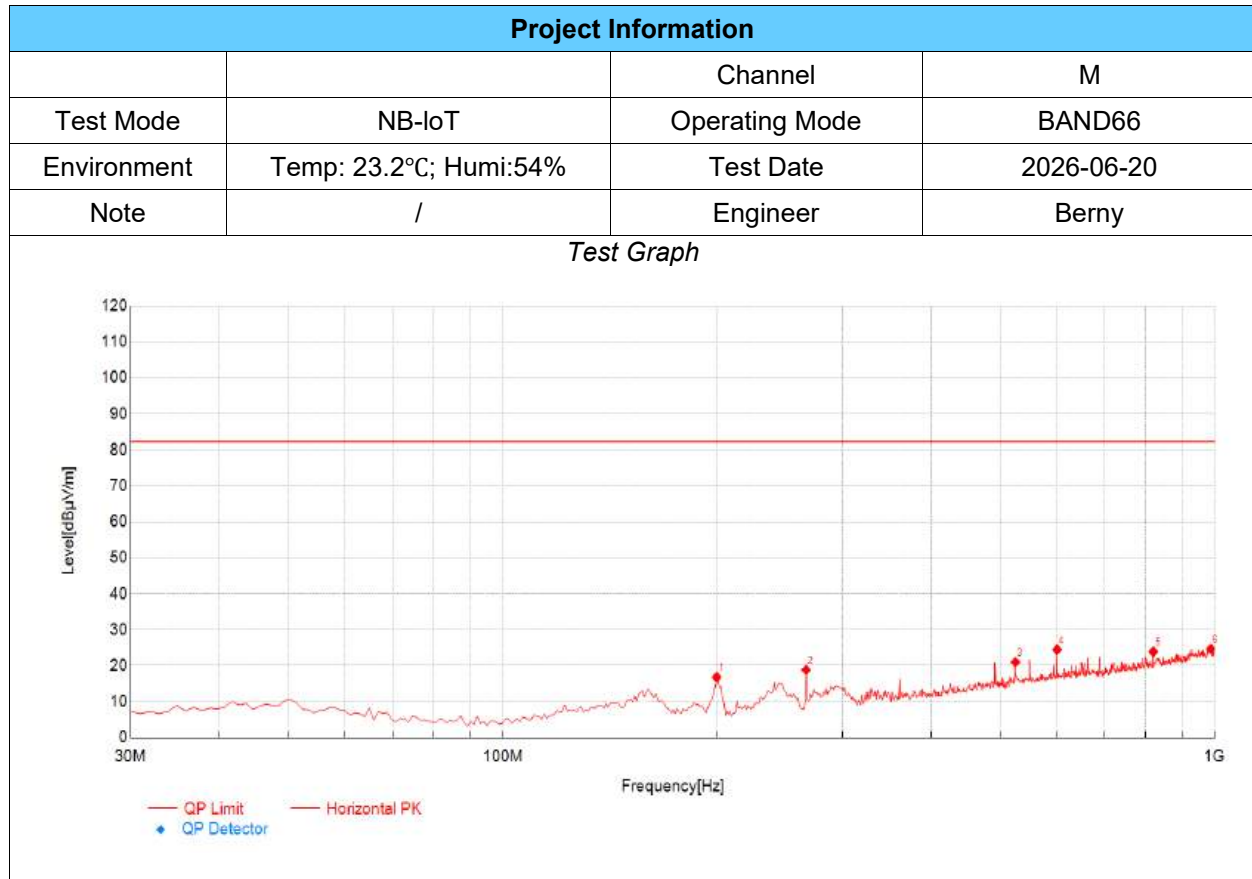


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 199.75          | 39.15          | 16.83          | -22.32        | 82.30          | 65.47       | PK  | Horizontal | PASS    |
| 2                   | 266.68          | 38.68          | 18.82          | -19.86        | 82.30          | 63.48       | PK  | Horizontal | PASS    |
| 3                   | 524.70          | 33.56          | 20.98          | -12.58        | 82.30          | 61.32       | PK  | Horizontal | PASS    |
| 4                   | 600.36          | 35.24          | 24.45          | -10.79        | 82.30          | 57.85       | PK  | Horizontal | PASS    |
| 5                   | 819.58          | 30.80          | 23.89          | -6.91         | 82.30          | 58.41       | PK  | Horizontal | PASS    |
| 6                   | 987.39          | 28.50          | 24.65          | -3.85         | 82.30          | 57.65       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

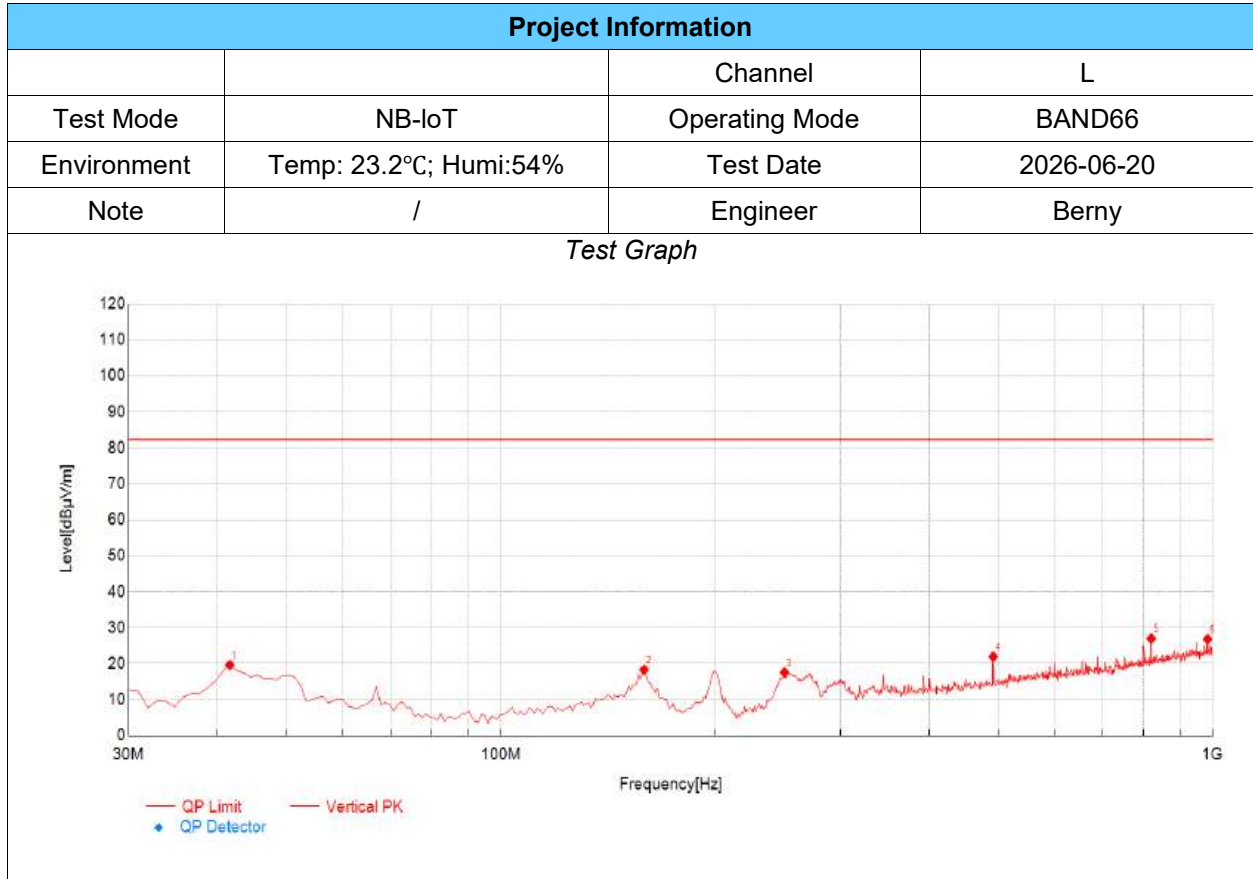


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 41.64           | 39.06          | 19.65          | -19.41        | 82.30          | 62.65       | PK  | Vertical | PASS    |
| 2                   | 159.01          | 36.42          | 18.33          | -18.09        | 82.30          | 63.97       | PK  | Vertical | PASS    |
| 3                   | 250.19          | 37.86          | 17.59          | -20.27        | 82.30          | 64.71       | PK  | Vertical | PASS    |
| 4                   | 491.72          | 35.28          | 22.00          | -13.28        | 82.30          | 60.30       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 33.90          | 26.99          | -6.91         | 82.30          | 55.31       | PK  | Vertical | PASS    |
| 6                   | 983.51          | 30.78          | 26.81          | -3.97         | 82.30          | 55.49       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

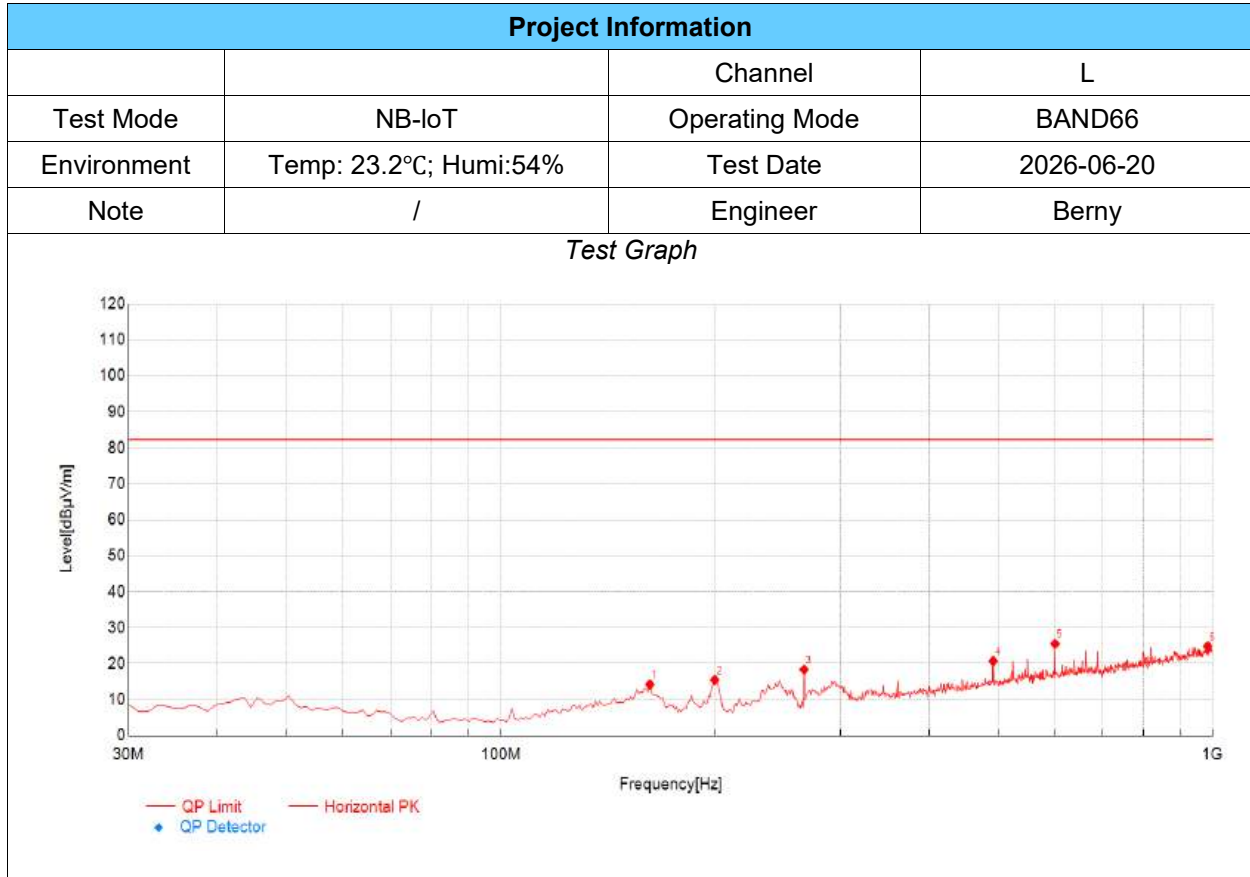


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 161.92          | 32.55          | 14.19          | -18.36        | 82.30          | 68.11       | PK  | Horizontal | PASS    |
| 2                   | 199.75          | 37.84          | 15.52          | -22.32        | 82.30          | 66.78       | PK  | Horizontal | PASS    |
| 3                   | 266.68          | 38.20          | 18.34          | -19.86        | 82.30          | 63.96       | PK  | Horizontal | PASS    |
| 4                   | 491.72          | 34.01          | 20.73          | -13.28        | 82.30          | 61.57       | PK  | Horizontal | PASS    |
| 5                   | 600.36          | 36.31          | 25.52          | -10.79        | 82.30          | 56.78       | PK  | Horizontal | PASS    |
| 6                   | 983.51          | 28.77          | 24.80          | -3.97         | 82.30          | 57.50       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

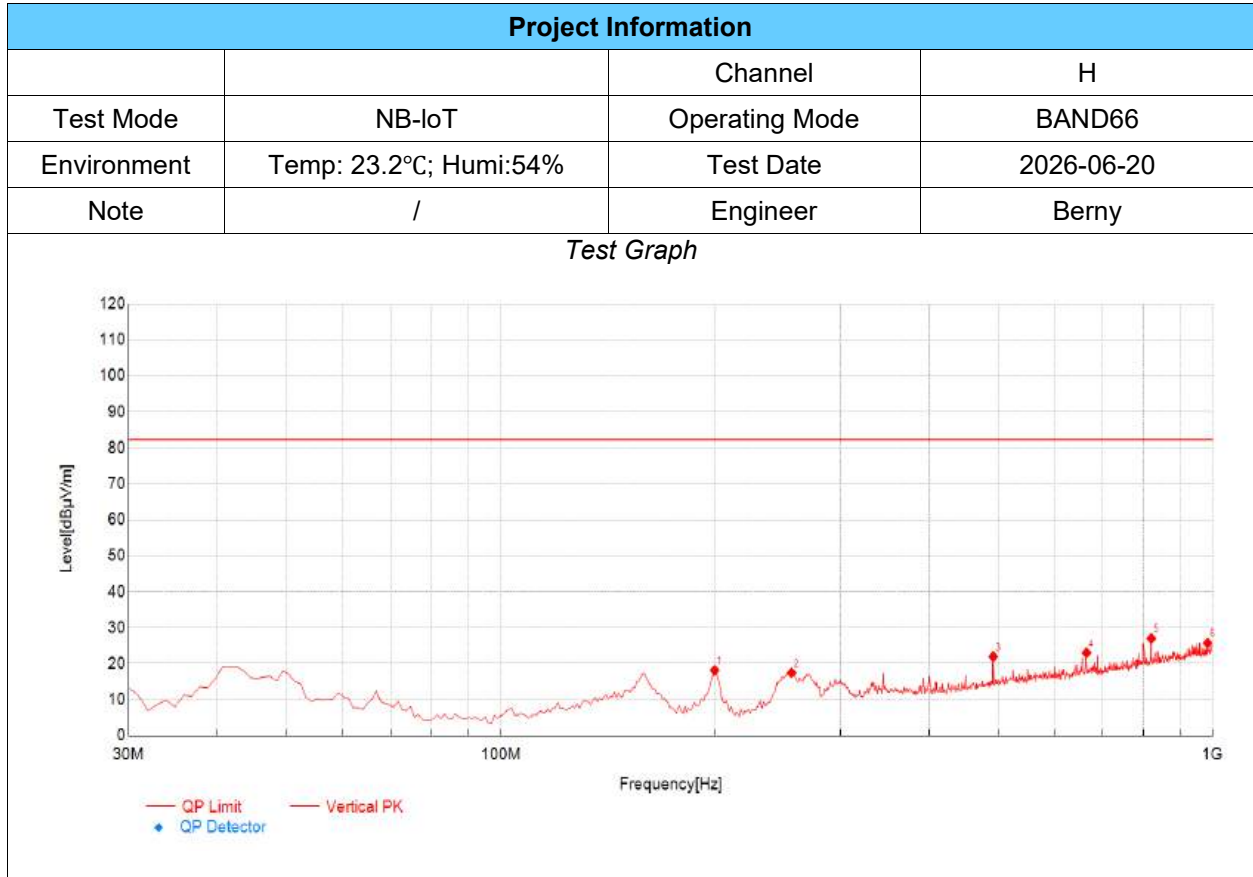

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 199.75          | 40.49          | 18.17          | -22.32        | 82.30          | 64.13       | PK  | Vertical | PASS    |
| 2                   | 256.01          | 37.63          | 17.47          | -20.16        | 82.30          | 64.83       | PK  | Vertical | PASS    |
| 3                   | 491.72          | 35.28          | 22.00          | -13.28        | 82.30          | 60.30       | PK  | Vertical | PASS    |
| 4                   | 664.38          | 32.81          | 23.02          | -9.79         | 82.30          | 59.28       | PK  | Vertical | PASS    |
| 5                   | 819.58          | 33.92          | 27.01          | -6.91         | 82.30          | 55.29       | PK  | Vertical | PASS    |
| 6                   | 983.51          | 29.71          | 25.74          | -3.97         | 82.30          | 56.56       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

All modes have been tested and the worst result as bellow:

## TX Radiated Test Result

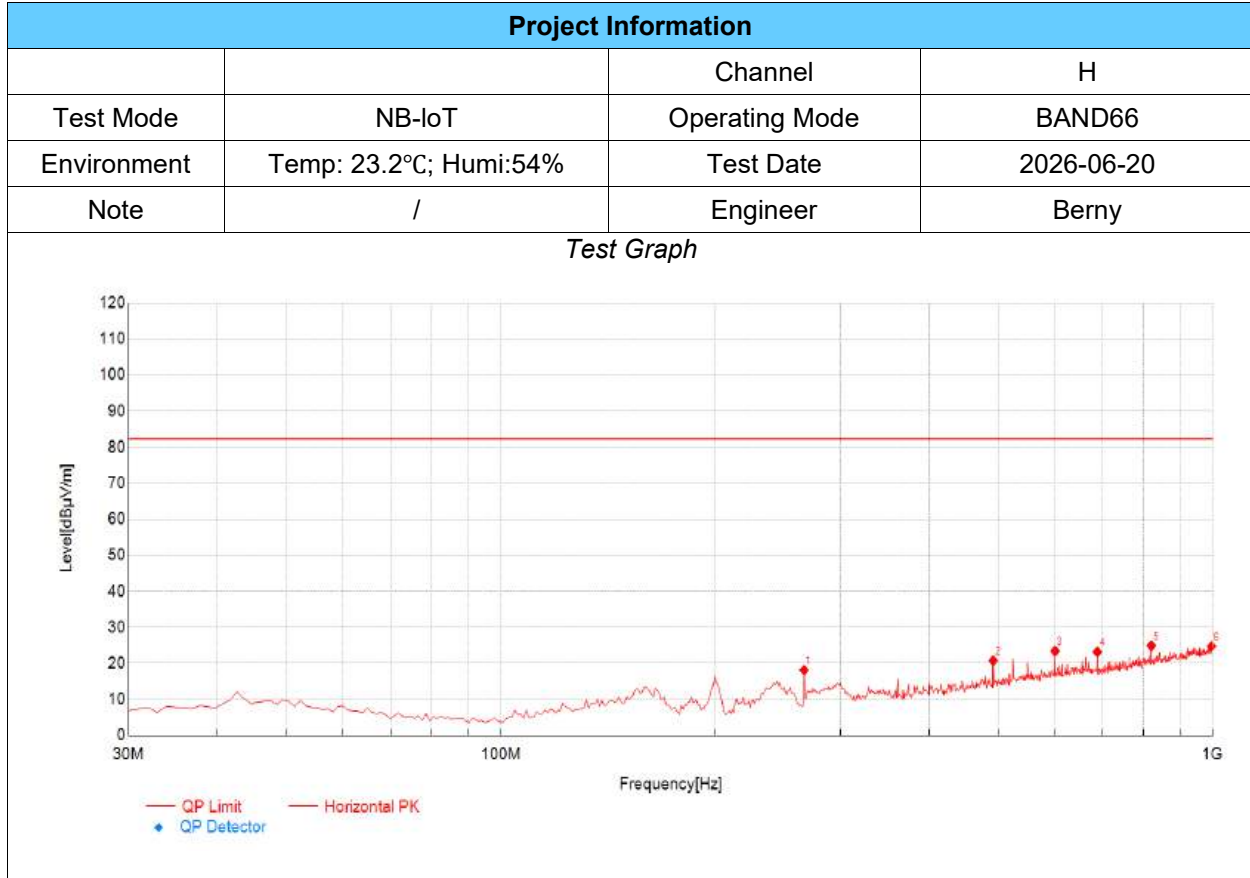


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 266.68          | 37.99          | 18.13          | -19.86        | 82.30          | 64.17       | PK  | Horizontal | PASS    |
| 2                   | 491.72          | 34.04          | 20.76          | -13.28        | 82.30          | 61.54       | PK  | Horizontal | PASS    |
| 3                   | 600.36          | 34.20          | 23.41          | -10.79        | 82.30          | 58.89       | PK  | Horizontal | PASS    |
| 4                   | 688.63          | 32.78          | 23.19          | -9.59         | 82.30          | 59.11       | PK  | Horizontal | PASS    |
| 5                   | 819.58          | 31.80          | 24.89          | -6.91         | 82.30          | 57.41       | PK  | Horizontal | PASS    |
| 6                   | 996.12          | 28.31          | 24.73          | -3.58         | 82.30          | 57.57       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

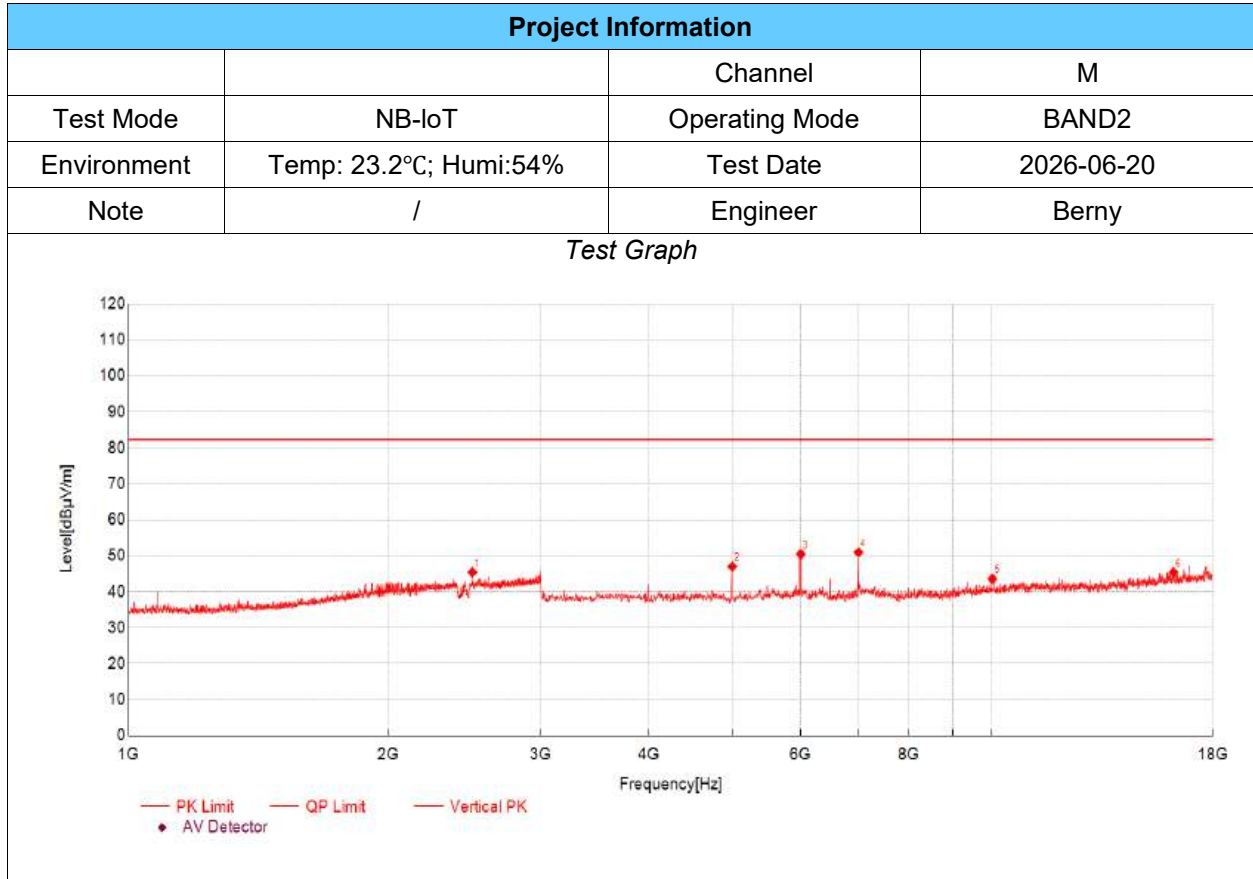

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2500.50         | 53.80          | 45.39          | -8.41         | 82.30          | 36.91       | PK  | Vertical | PASS    |
| 2                   | 5000.67         | 58.18          | 47.00          | -11.18        | 82.30          | 35.30       | PK  | Vertical | PASS    |
| 3                   | 6001.00         | 59.31          | 50.45          | -8.86         | 82.30          | 31.85       | PK  | Vertical | PASS    |
| 4                   | 7001.33         | 58.78          | 50.97          | -7.81         | 82.30          | 31.33       | PK  | Vertical | PASS    |
| 5                   | 10002.33        | 49.74          | 43.56          | -6.18         | 82.30          | 38.74       | PK  | Vertical | PASS    |
| 6                   | 16209.40        | 46.60          | 45.39          | -1.21         | 82.30          | 36.91       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | M          |
| Test Mode           | NB-IoT                 | Operating Mode | BAND2      |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

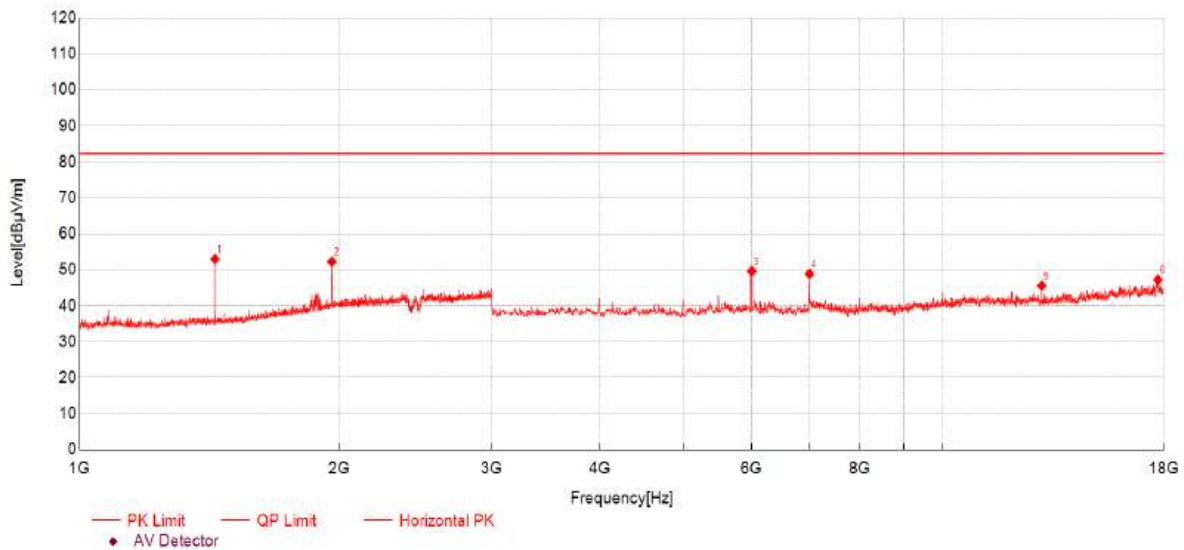


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 1434.81         | 66.86          | 53.00          | -13.86        | 82.30          | 29.30       | PK  | Horizontal | PASS    |
| 2                   | 1959.65         | 61.69          | 52.26          | -9.43         | 82.30          | 30.04       | PK  | Horizontal | PASS    |
| 3                   | 6001.00         | 58.48          | 49.62          | -8.86         | 82.30          | 32.68       | PK  | Horizontal | PASS    |
| 4                   | 7001.33         | 56.68          | 48.87          | -7.81         | 82.30          | 33.43       | PK  | Horizontal | PASS    |
| 5                   | 13003.33        | 50.04          | 45.55          | -4.49         | 82.30          | 36.75       | PK  | Horizontal | PASS    |
| 6                   | 17719.91        | 47.45          | 47.20          | -0.25         | 82.30          | 35.10       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

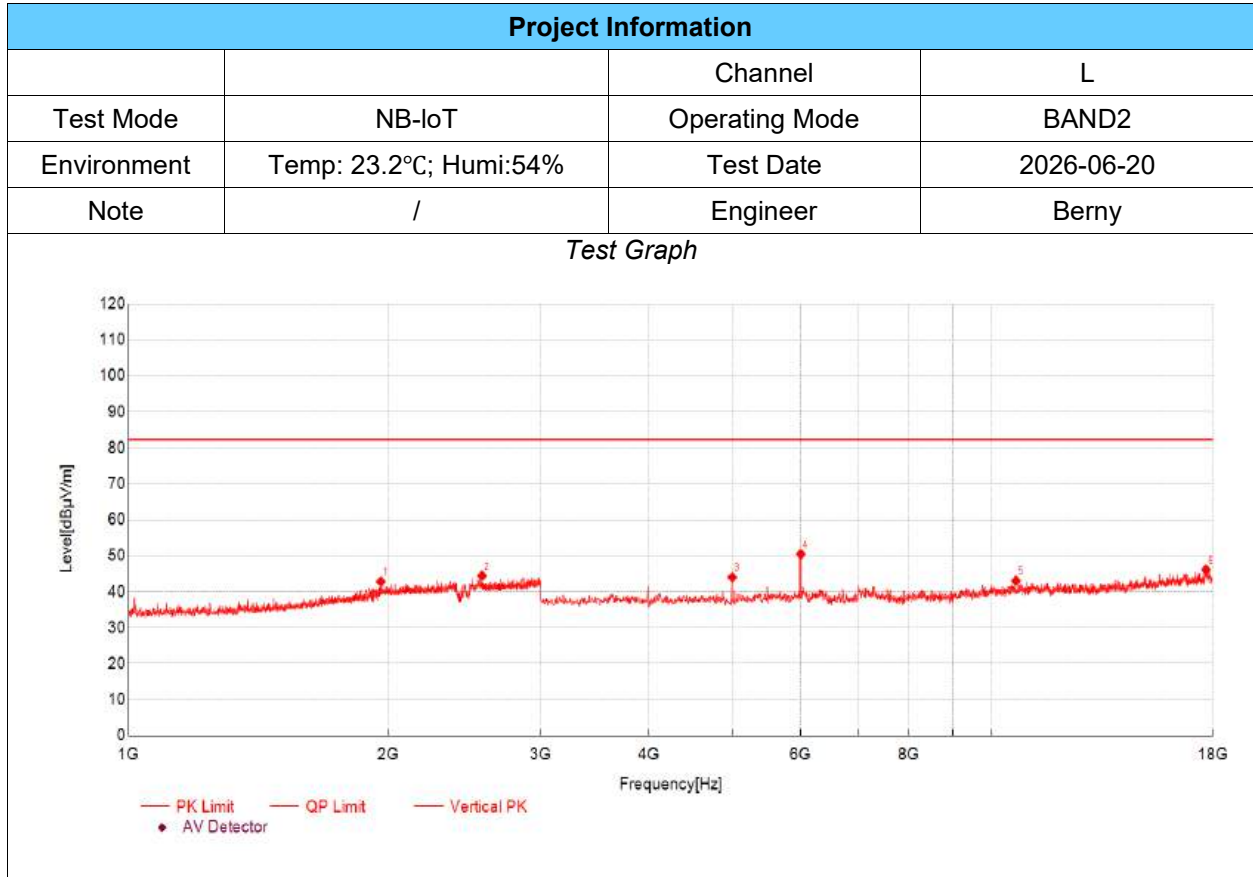


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1959.65         | 52.26          | 42.83          | -9.43         | 82.30          | 39.47       | PK  | Vertical | PASS    |
| 2                   | 2565.86         | 52.46          | 44.42          | -8.04         | 82.30          | 37.88       | PK  | Vertical | PASS    |
| 3                   | 5000.67         | 55.19          | 44.01          | -11.18        | 82.30          | 38.29       | PK  | Vertical | PASS    |
| 4                   | 6001.00         | 59.31          | 50.45          | -8.86         | 82.30          | 31.85       | PK  | Vertical | PASS    |
| 5                   | 10652.55        | 48.36          | 43.04          | -5.32         | 82.30          | 39.26       | PK  | Vertical | PASS    |
| 6                   | 17669.89        | 45.84          | 46.10          | 0.26          | 82.30          | 36.20       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

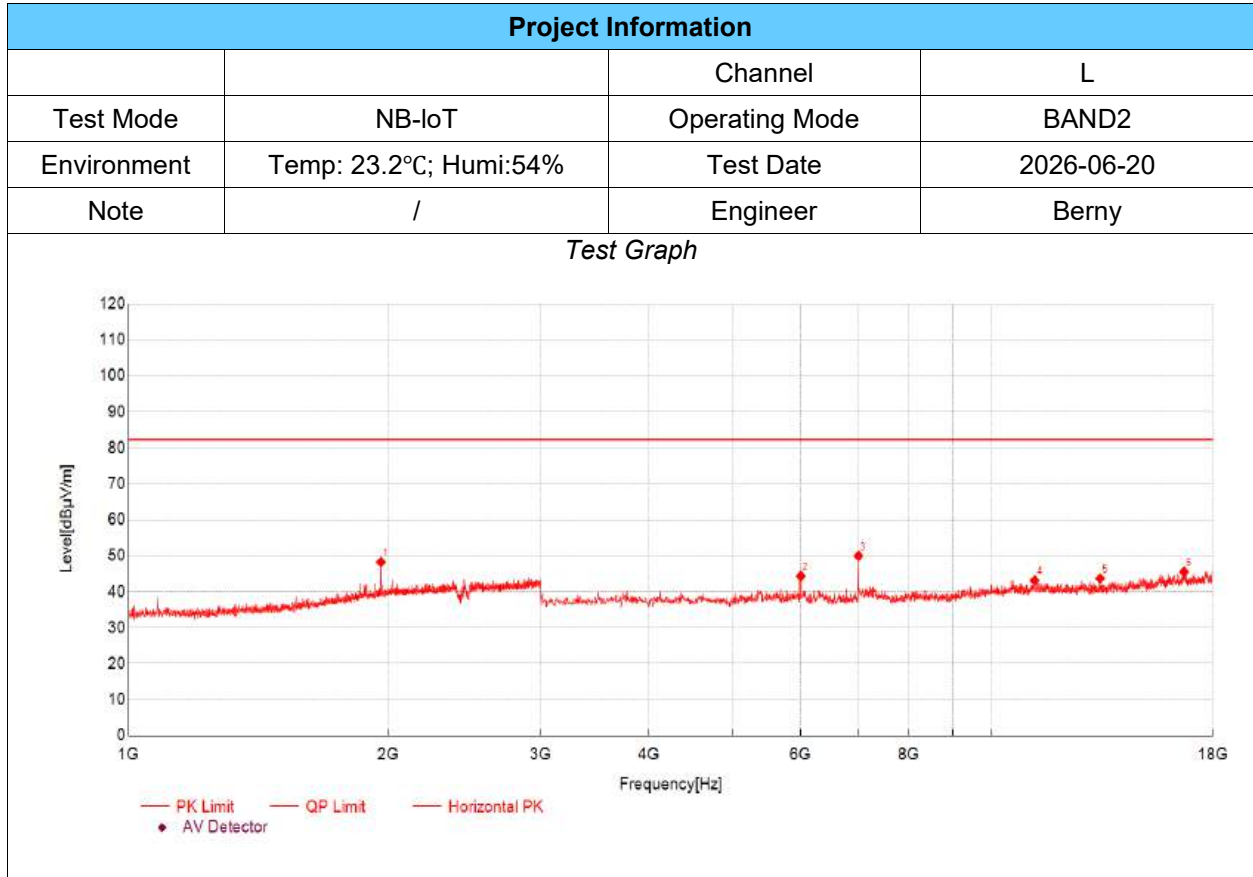


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 1960.32         | 57.67          | 48.26          | -9.41         | 82.30          | 34.04       | PK  | Horizontal | PASS    |
| 2                   | 6001.00         | 53.20          | 44.34          | -8.86         | 82.30          | 37.96       | PK  | Horizontal | PASS    |
| 3                   | 7001.33         | 57.79          | 49.98          | -7.81         | 82.30          | 32.32       | PK  | Horizontal | PASS    |
| 4                   | 11197.73        | 47.65          | 43.16          | -4.49         | 82.30          | 39.14       | PK  | Horizontal | PASS    |
| 5                   | 13328.44        | 48.29          | 43.69          | -4.60         | 82.30          | 38.61       | PK  | Horizontal | PASS    |
| 6                   | 16674.56        | 46.00          | 45.51          | -0.49         | 82.30          | 36.79       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

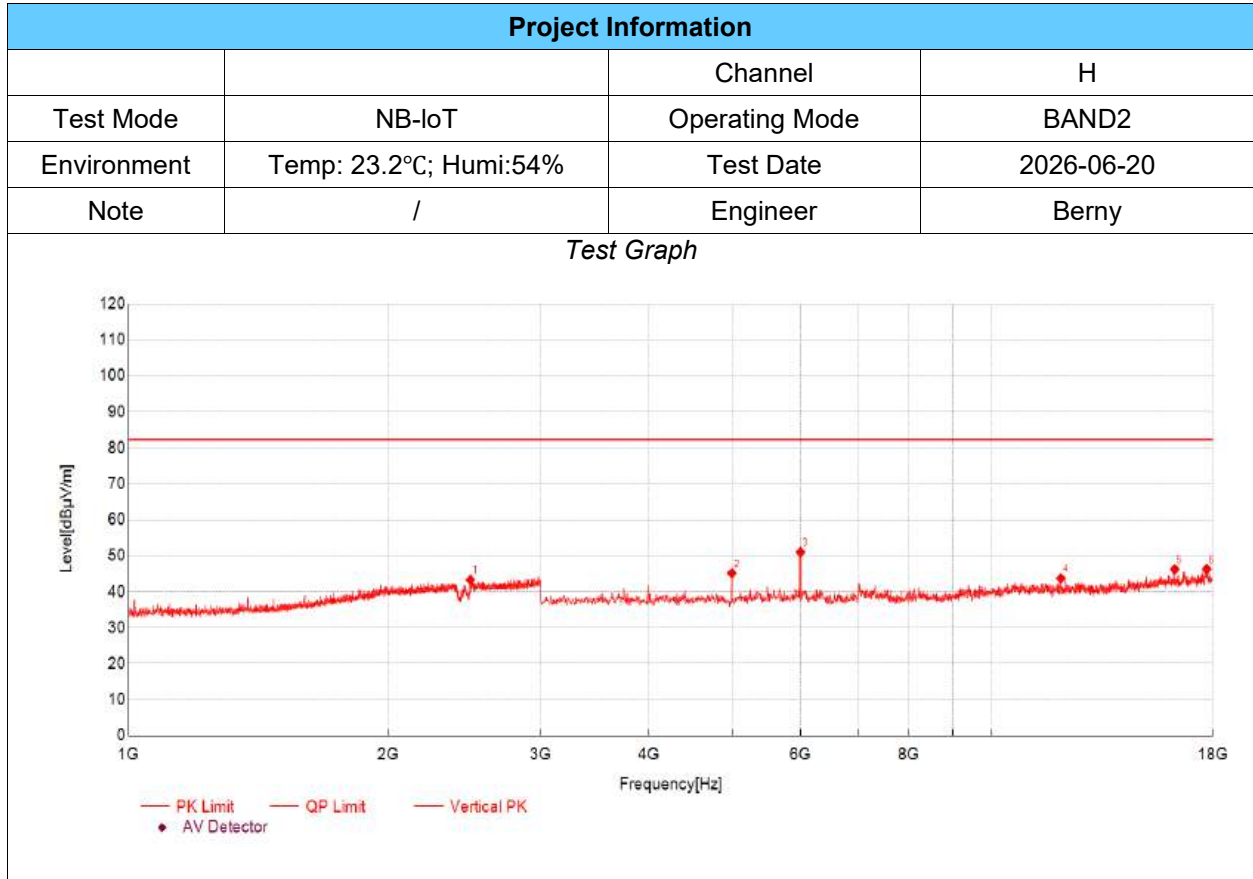


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2487.83         | 51.75          | 43.33          | -8.42         | 82.30          | 38.97       | PK  | Vertical | PASS    |
| 2                   | 4995.67         | 56.32          | 45.14          | -11.18        | 82.30          | 37.16       | PK  | Vertical | PASS    |
| 3                   | 5996.00         | 59.93          | 51.02          | -8.91         | 82.30          | 31.28       | PK  | Vertical | PASS    |
| 4                   | 12003.00        | 48.17          | 43.73          | -4.44         | 82.30          | 38.57       | PK  | Vertical | PASS    |
| 5                   | 16264.42        | 47.18          | 46.21          | -0.97         | 82.30          | 36.09       | PK  | Vertical | PASS    |
| 6                   | 17709.90        | 46.30          | 46.27          | -0.03         | 82.30          | 36.03       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

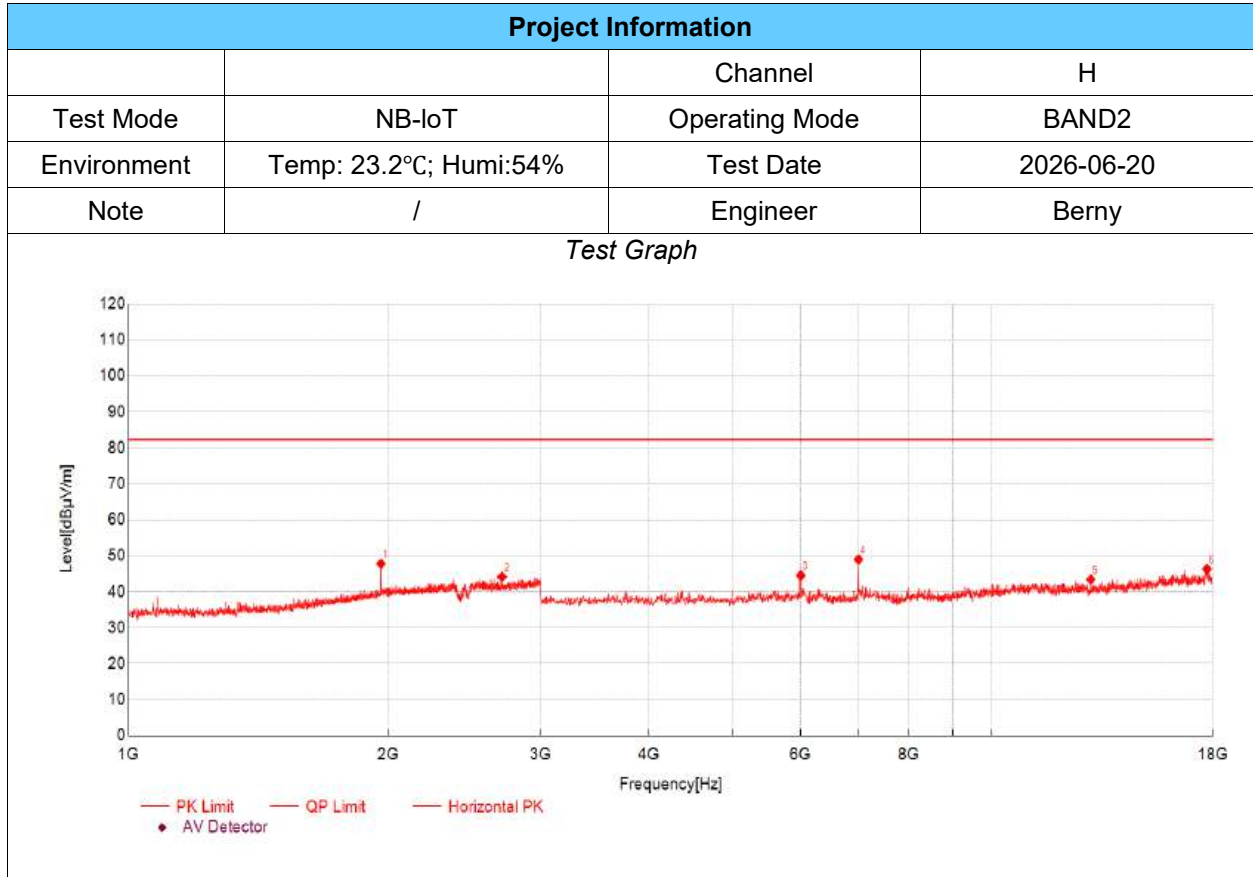


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 1960.32         | 57.17          | 47.76          | -9.41         | 82.30          | 34.54       | PK  | Horizontal | PASS    |
| 2                   | 2706.57         | 52.61          | 44.15          | -8.46         | 82.30          | 38.15       | PK  | Horizontal | PASS    |
| 3                   | 6001.00         | 53.40          | 44.54          | -8.86         | 82.30          | 37.76       | PK  | Horizontal | PASS    |
| 4                   | 7001.33         | 56.79          | 48.98          | -7.81         | 82.30          | 33.32       | PK  | Horizontal | PASS    |
| 5                   | 13003.33        | 47.90          | 43.41          | -4.49         | 82.30          | 38.89       | PK  | Horizontal | PASS    |
| 6                   | 17719.91        | 46.53          | 46.28          | -0.25         | 82.30          | 36.02       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

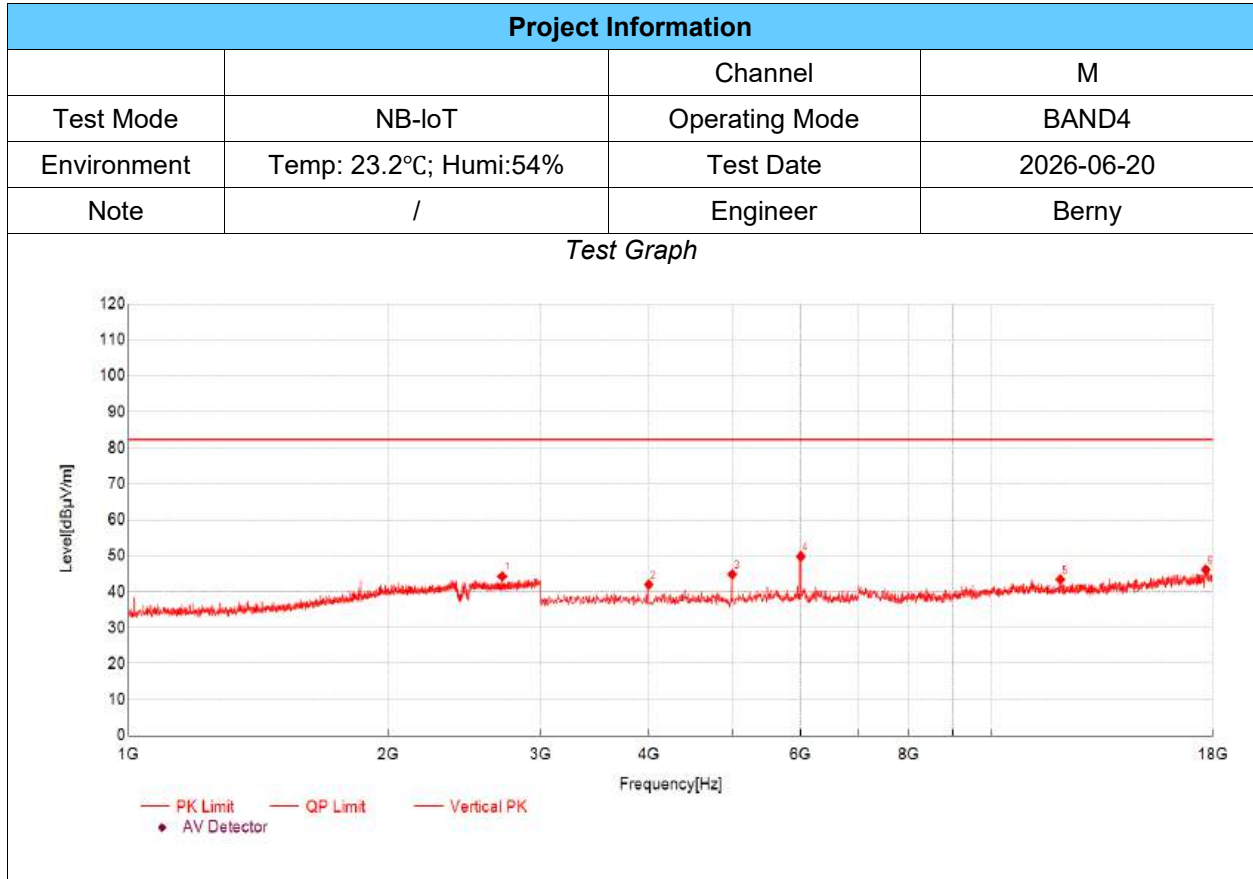


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2707.90         | 52.73          | 44.27          | -8.46         | 82.30          | 38.03       | PK  | Vertical | PASS    |
| 2                   | 4000.33         | 55.34          | 41.99          | -13.35        | 82.30          | 40.31       | PK  | Vertical | PASS    |
| 3                   | 5000.67         | 56.02          | 44.84          | -11.18        | 82.30          | 37.46       | PK  | Vertical | PASS    |
| 4                   | 6001.00         | 58.68          | 49.82          | -8.86         | 82.30          | 32.48       | PK  | Vertical | PASS    |
| 5                   | 11988.00        | 47.66          | 43.45          | -4.21         | 82.30          | 38.85       | PK  | Vertical | PASS    |
| 6                   | 17659.89        | 45.98          | 46.09          | 0.11          | 82.30          | 36.21       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

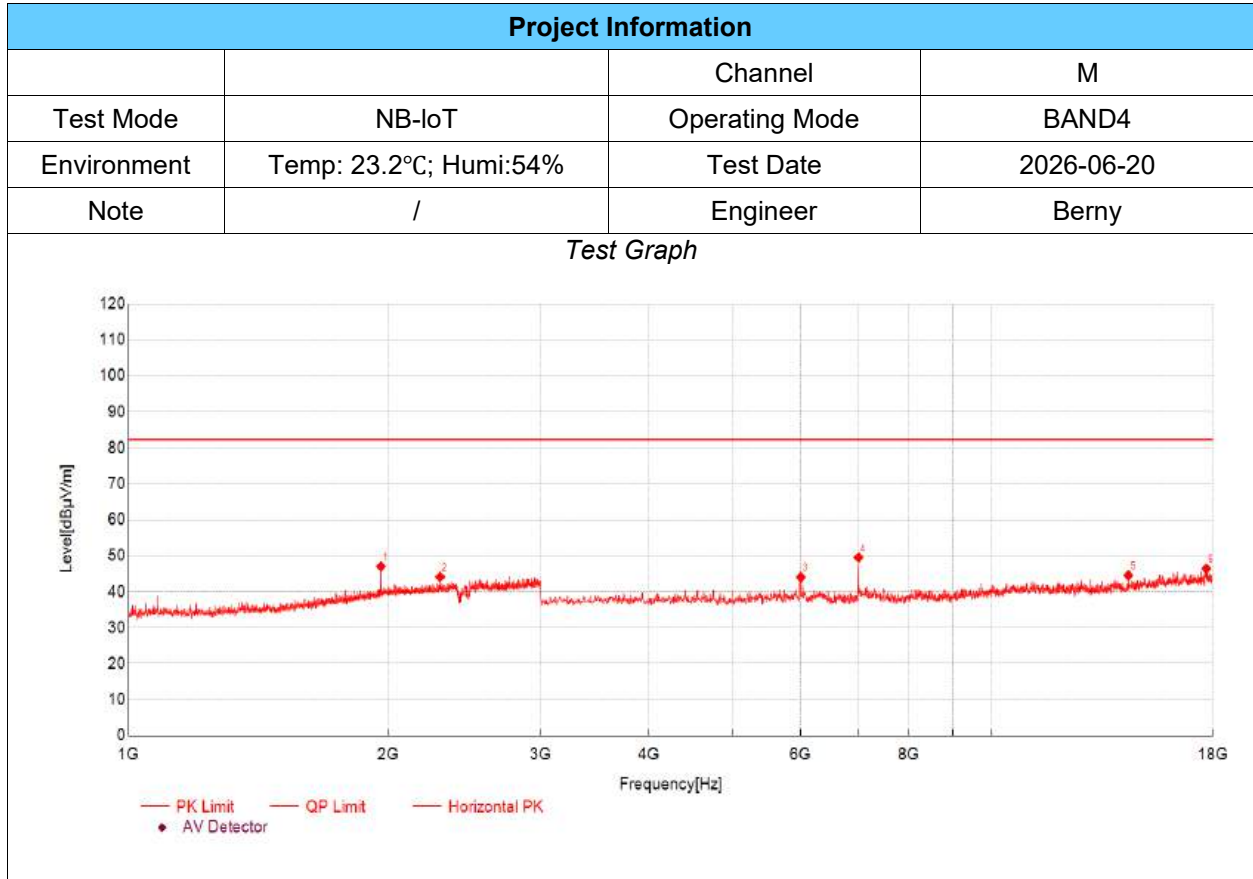


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 1960.32         | 56.46          | 47.05          | -9.41         | 82.30          | 35.25       | PK  | Horizontal | PASS    |
| 2                   | 2294.43         | 53.12          | 44.13          | -8.99         | 82.30          | 38.17       | PK  | Horizontal | PASS    |
| 3                   | 6001.00         | 52.91          | 44.05          | -8.86         | 82.30          | 38.25       | PK  | Horizontal | PASS    |
| 4                   | 7001.33         | 57.33          | 49.52          | -7.81         | 82.30          | 32.78       | PK  | Horizontal | PASS    |
| 5                   | 14373.79        | 47.63          | 44.56          | -3.07         | 82.30          | 37.74       | PK  | Horizontal | PASS    |
| 6                   | 17689.90        | 46.18          | 46.41          | 0.23          | 82.30          | 35.89       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

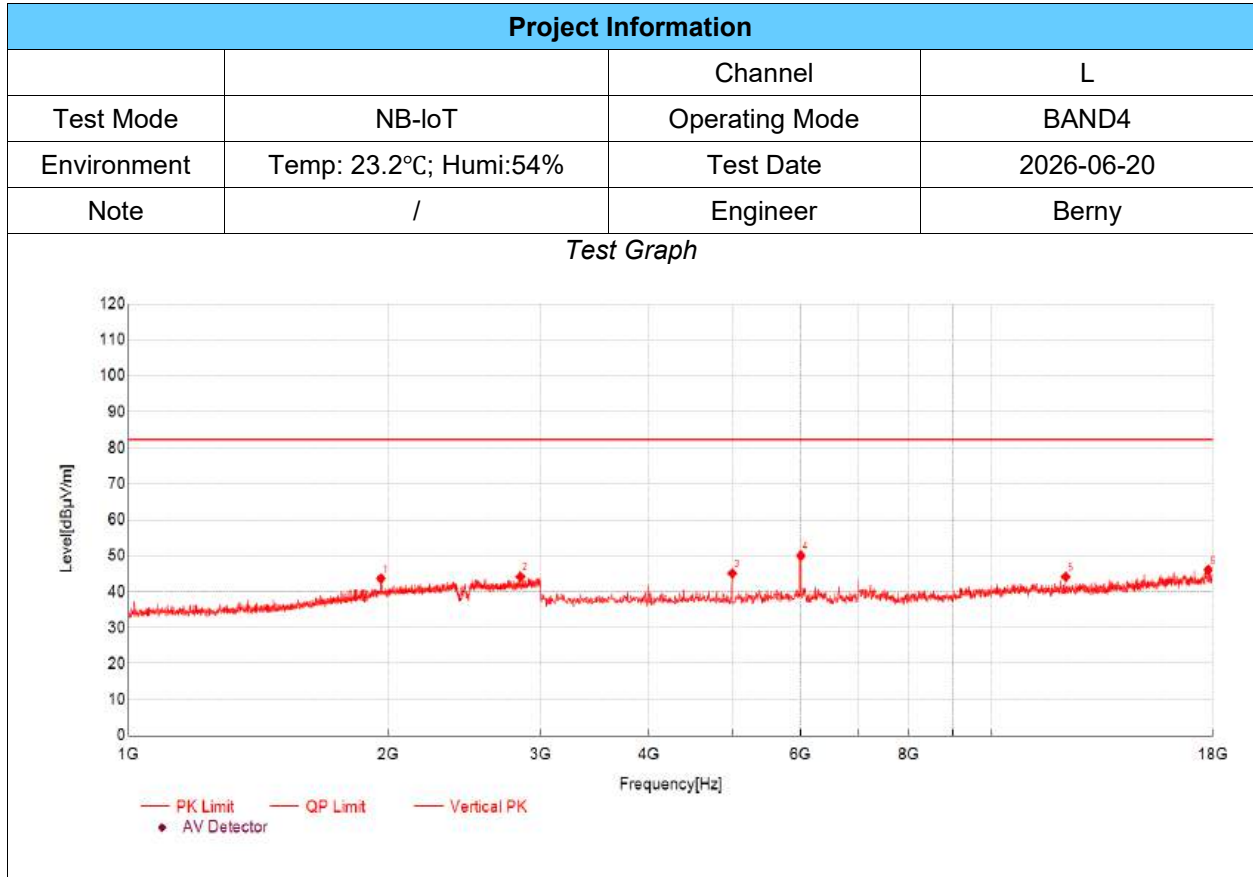


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1960.32         | 53.11          | 43.70          | -9.41         | 82.30          | 38.60       | PK  | Vertical | PASS    |
| 2                   | 2841.95         | 52.12          | 44.19          | -7.93         | 82.30          | 38.11       | PK  | Vertical | PASS    |
| 3                   | 5000.67         | 56.27          | 45.09          | -11.18        | 82.30          | 37.21       | PK  | Vertical | PASS    |
| 4                   | 6001.00         | 58.88          | 50.02          | -8.86         | 82.30          | 32.28       | PK  | Vertical | PASS    |
| 5                   | 12163.05        | 48.74          | 44.15          | -4.59         | 82.30          | 38.15       | PK  | Vertical | PASS    |
| 6                   | 17789.93        | 46.59          | 46.06          | -0.53         | 82.30          | 36.24       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

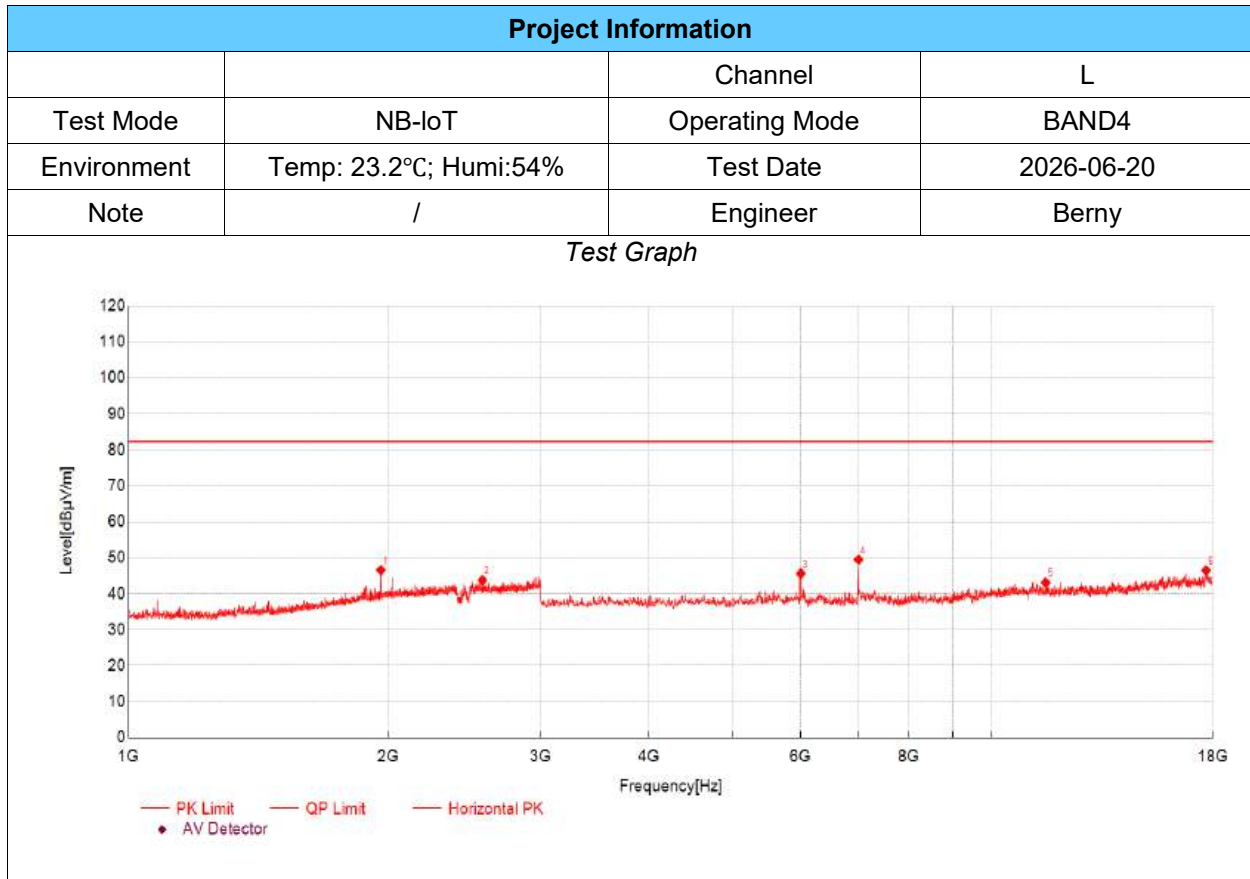


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 1959.65         | 55.98          | 46.55          | -9.43         | 82.30          | 35.75       | PK  | Horizontal | PASS    |
| 2                   | 2568.52         | 51.78          | 43.74          | -8.04         | 82.30          | 38.56       | PK  | Horizontal | PASS    |
| 3                   | 6001.00         | 54.47          | 45.61          | -8.86         | 82.30          | 36.69       | PK  | Horizontal | PASS    |
| 4                   | 7001.33         | 57.29          | 49.48          | -7.81         | 82.30          | 32.82       | PK  | Horizontal | PASS    |
| 5                   | 11522.84        | 47.59          | 43.12          | -4.47         | 82.30          | 39.18       | PK  | Horizontal | PASS    |
| 6                   | 17674.89        | 46.15          | 46.47          | 0.32          | 82.30          | 35.83       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

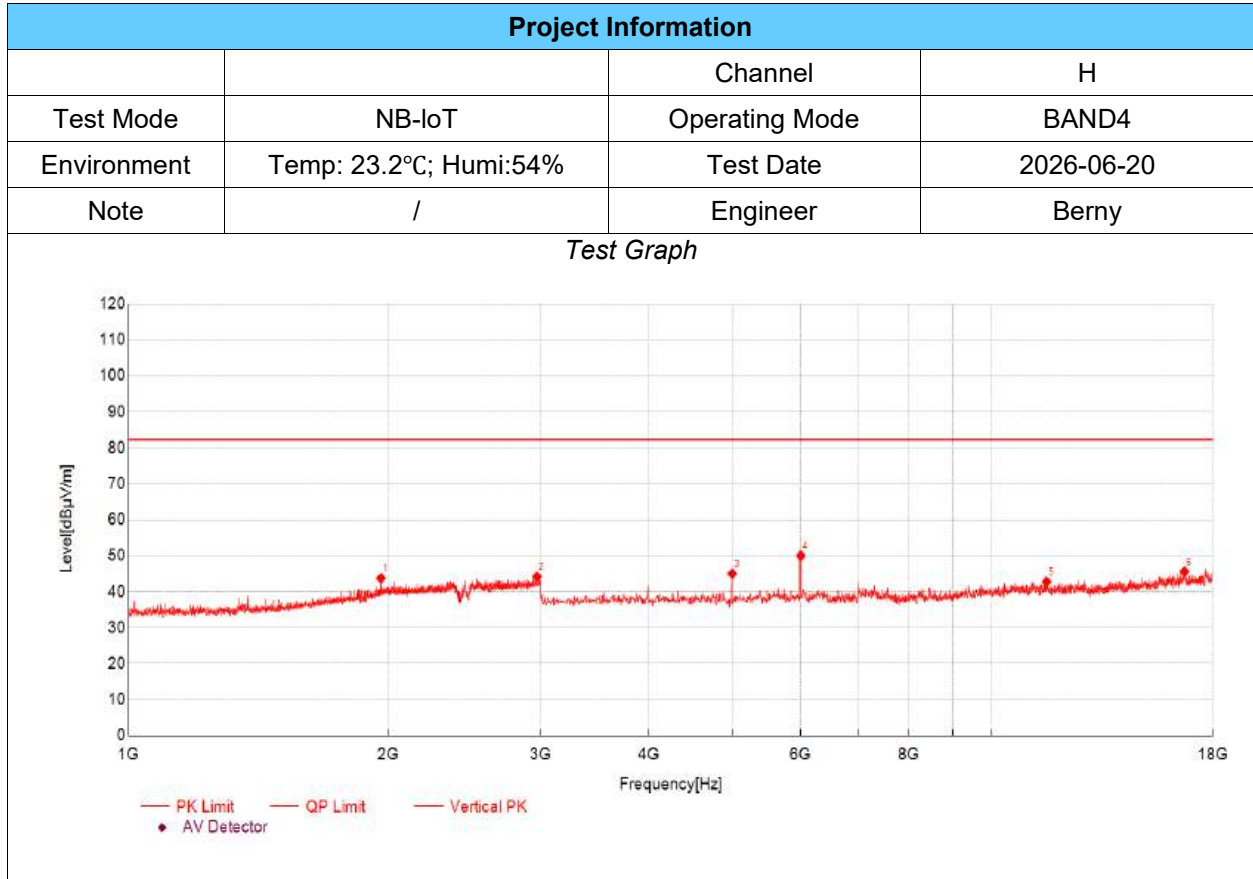


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1960.32         | 53.20          | 43.79          | -9.41         | 82.30          | 38.51       | PK  | Vertical | PASS    |
| 2                   | 2969.99         | 51.36          | 44.20          | -7.16         | 82.30          | 38.10       | PK  | Vertical | PASS    |
| 3                   | 5000.67         | 56.19          | 45.01          | -11.18        | 82.30          | 37.29       | PK  | Vertical | PASS    |
| 4                   | 6001.00         | 58.88          | 50.02          | -8.86         | 82.30          | 32.28       | PK  | Vertical | PASS    |
| 5                   | 11552.85        | 46.97          | 42.80          | -4.17         | 82.30          | 39.50       | PK  | Vertical | PASS    |
| 6                   | 16694.56        | 46.06          | 45.57          | -0.49         | 82.30          | 36.73       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

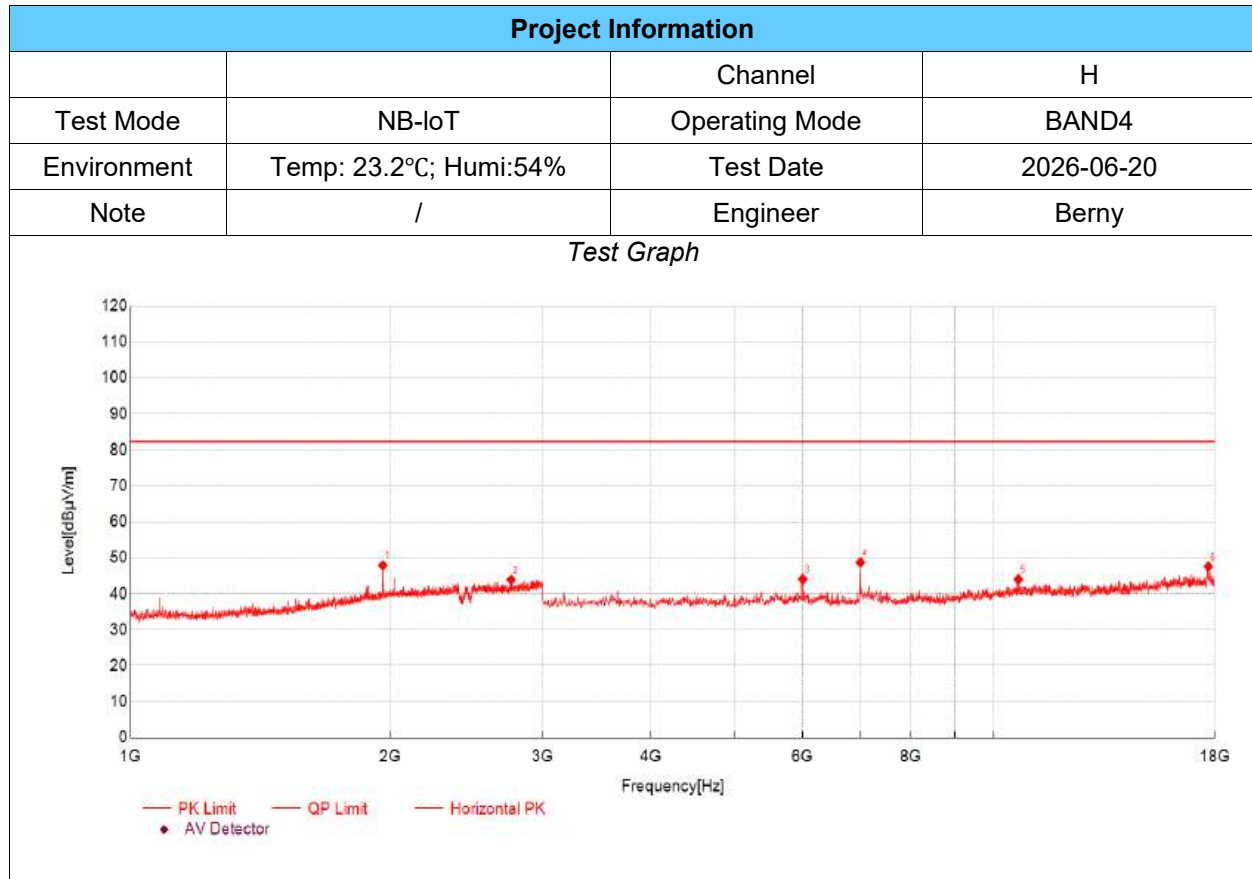


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 1959.65         | 57.30          | 47.87          | -9.43         | 82.30          | 34.43       | PK  | Horizontal | PASS    |
| 2                   | 2759.25         | 51.92          | 43.88          | -8.04         | 82.30          | 38.42       | PK  | Horizontal | PASS    |
| 3                   | 6001.00         | 52.90          | 44.04          | -8.86         | 82.30          | 38.26       | PK  | Horizontal | PASS    |
| 4                   | 7001.33         | 56.52          | 48.71          | -7.81         | 82.30          | 33.59       | PK  | Horizontal | PASS    |
| 5                   | 10662.55        | 49.21          | 43.98          | -5.23         | 82.30          | 38.32       | PK  | Horizontal | PASS    |
| 6                   | 17689.90        | 47.31          | 47.54          | 0.23          | 82.30          | 34.76       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

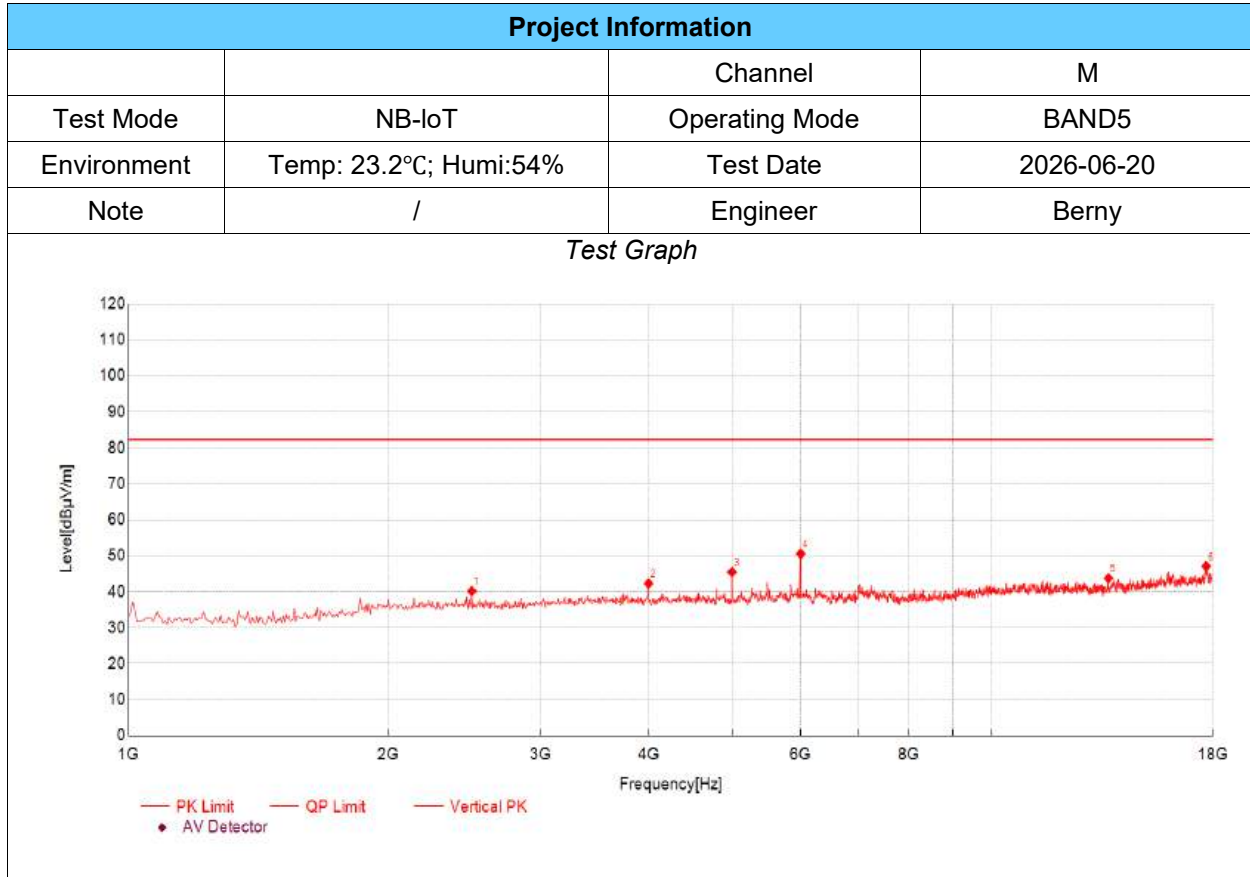


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2496.50         | 57.29          | 40.15          | -17.14        | 82.30          | 42.15       | PK  | Vertical | PASS    |
| 2                   | 3998.67         | 55.58          | 42.28          | -13.30        | 82.30          | 40.02       | PK  | Vertical | PASS    |
| 3                   | 4996.33         | 56.55          | 45.45          | -11.10        | 82.30          | 36.85       | PK  | Vertical | PASS    |
| 4                   | 5999.67         | 59.53          | 50.54          | -8.99         | 82.30          | 31.76       | PK  | Vertical | PASS    |
| 5                   | 13629.54        | 47.55          | 43.76          | -3.79         | 82.30          | 38.54       | PK  | Vertical | PASS    |
| 6                   | 17682.56        | 47.36          | 47.09          | -0.27         | 82.30          | 35.21       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

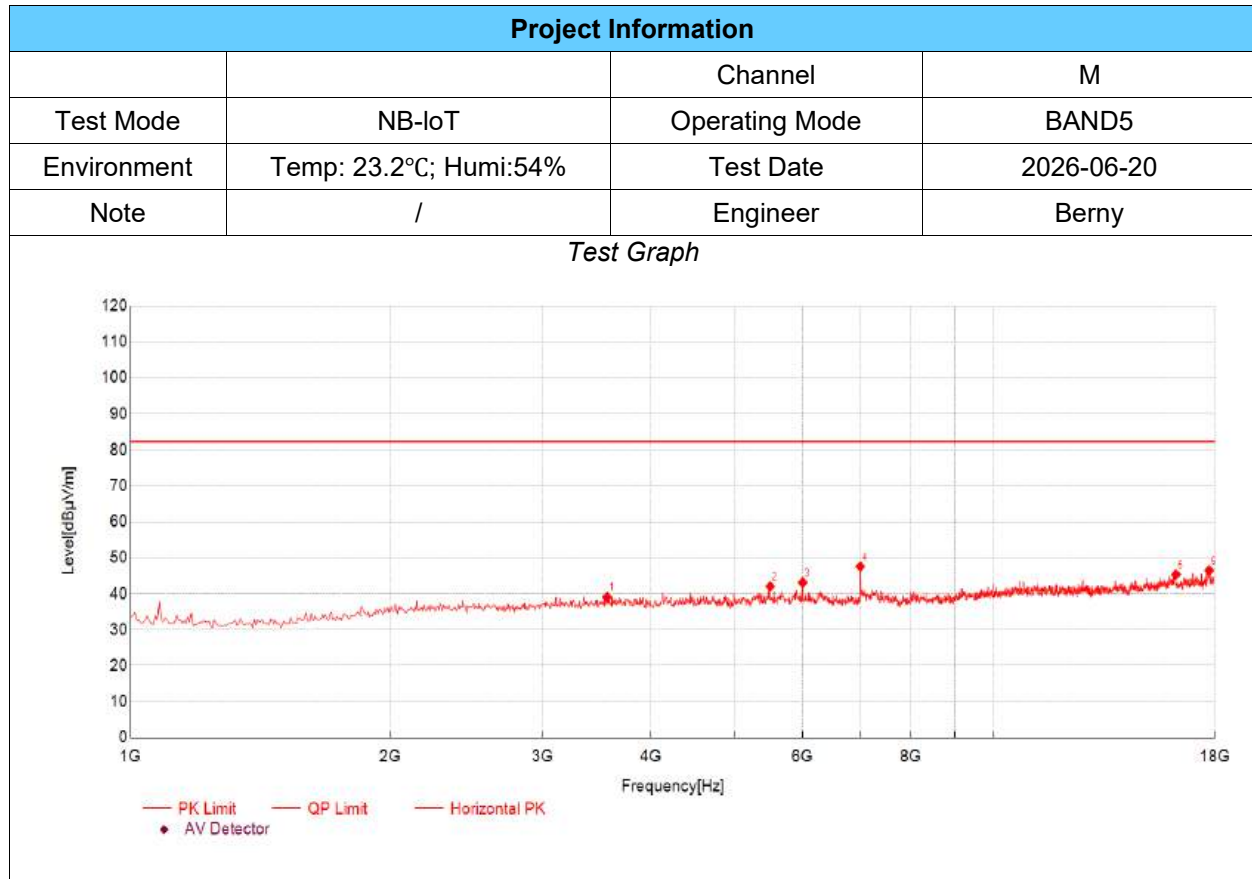


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 3562.19         | 53.18          | 39.09          | -14.09        | 82.30          | 43.21       | PK  | Horizontal | PASS    |
| 2                   | 5500.83         | 51.35          | 42.03          | -9.32         | 82.30          | 40.27       | PK  | Horizontal | PASS    |
| 3                   | 5999.67         | 52.11          | 43.12          | -8.99         | 82.30          | 39.18       | PK  | Horizontal | PASS    |
| 4                   | 6997.33         | 55.20          | 47.58          | -7.62         | 82.30          | 34.72       | PK  | Horizontal | PASS    |
| 5                   | 16231.41        | 45.99          | 45.34          | -0.65         | 82.30          | 36.96       | PK  | Horizontal | PASS    |
| 6                   | 17733.58        | 45.93          | 46.45          | 0.52          | 82.30          | 35.85       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

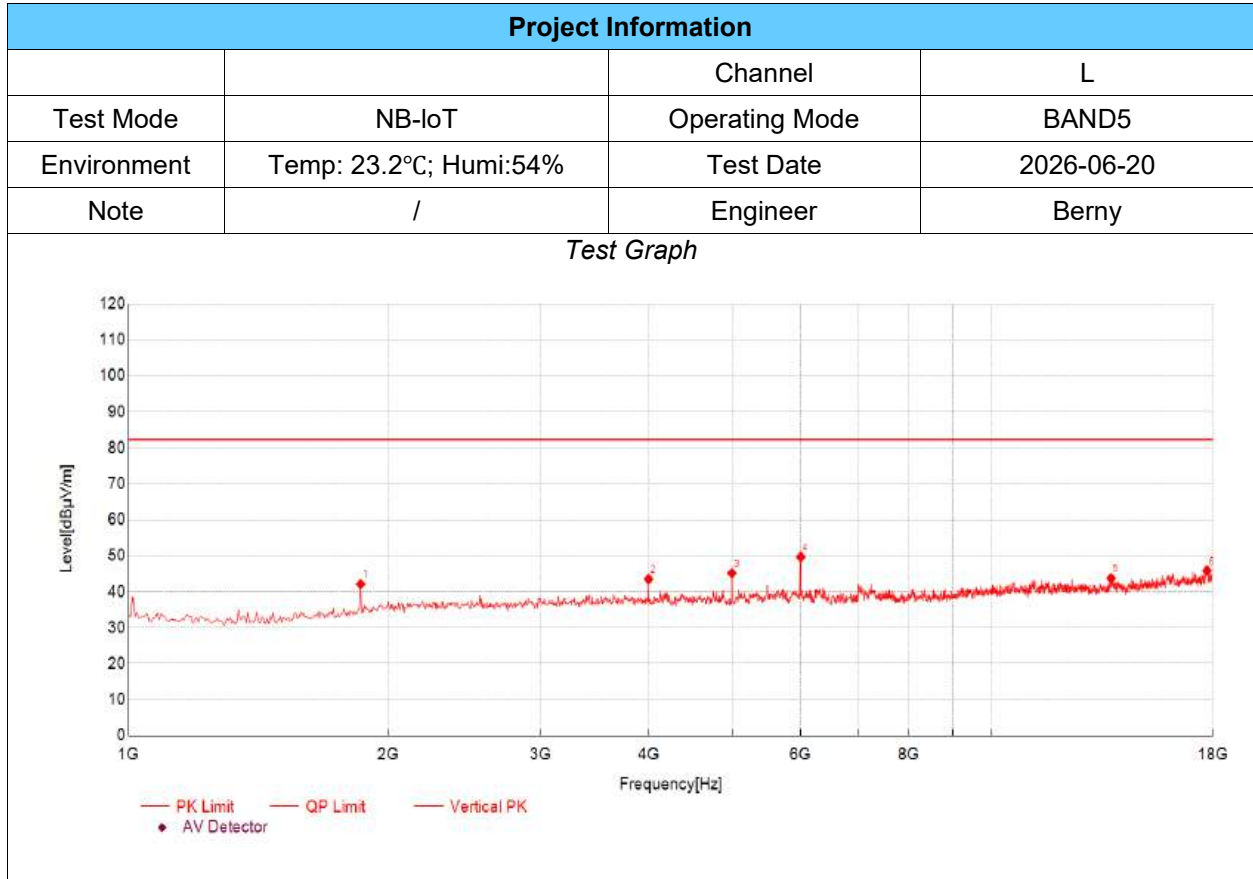

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1855.95         | 61.75          | 42.11          | -19.64        | 82.30          | 40.19       | PK  | Vertical | PASS    |
| 2                   | 3998.67         | 56.82          | 43.52          | -13.30        | 82.30          | 38.78       | PK  | Vertical | PASS    |
| 3                   | 4996.33         | 56.25          | 45.15          | -11.10        | 82.30          | 37.15       | PK  | Vertical | PASS    |
| 4                   | 5999.67         | 58.67          | 49.68          | -8.99         | 82.30          | 32.62       | PK  | Vertical | PASS    |
| 5                   | 13725.91        | 47.43          | 43.74          | -3.69         | 82.30          | 38.56       | PK  | Vertical | PASS    |
| 6                   | 17722.24        | 45.38          | 45.84          | 0.46          | 82.30          | 36.46       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | L          |
| Test Mode           | NB-IoT                 | Operating Mode | BAND5      |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

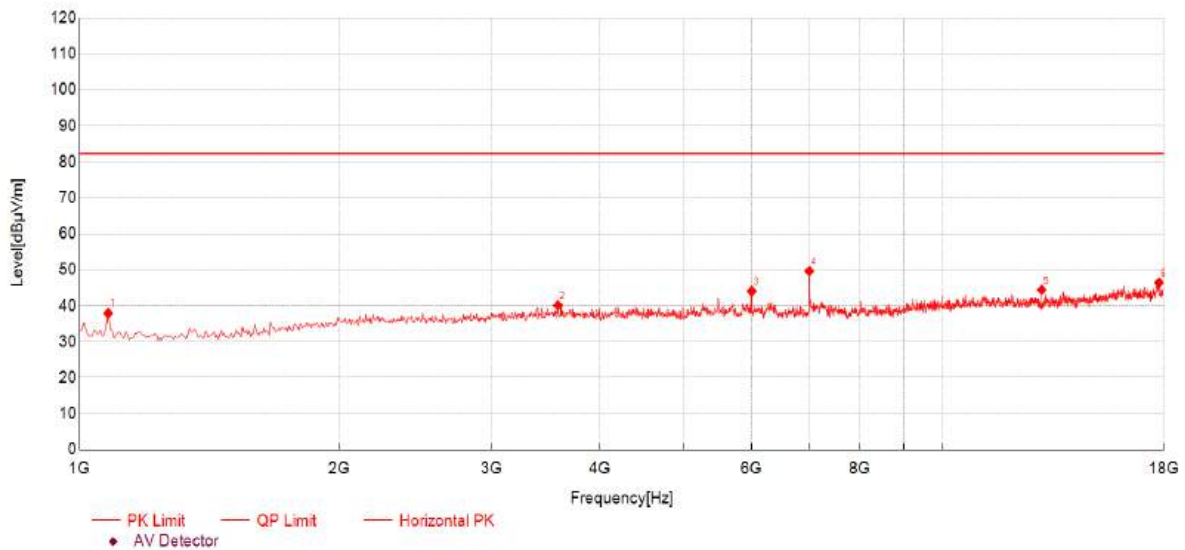


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 1079.36         | 60.47          | 37.95          | -22.52        | 82.30          | 44.35       | PK  | Horizontal | PASS    |
| 2                   | 3579.19         | 54.15          | 40.11          | -14.04        | 82.30          | 42.19       | PK  | Horizontal | PASS    |
| 3                   | 5999.67         | 53.05          | 44.06          | -8.99         | 82.30          | 38.24       | PK  | Horizontal | PASS    |
| 4                   | 6997.33         | 57.26          | 49.64          | -7.62         | 82.30          | 32.66       | PK  | Horizontal | PASS    |
| 5                   | 13000.33        | 48.99          | 44.43          | -4.56         | 82.30          | 37.87       | PK  | Horizontal | PASS    |
| 6                   | 17773.26        | 46.66          | 46.38          | -0.28         | 82.30          | 35.92       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

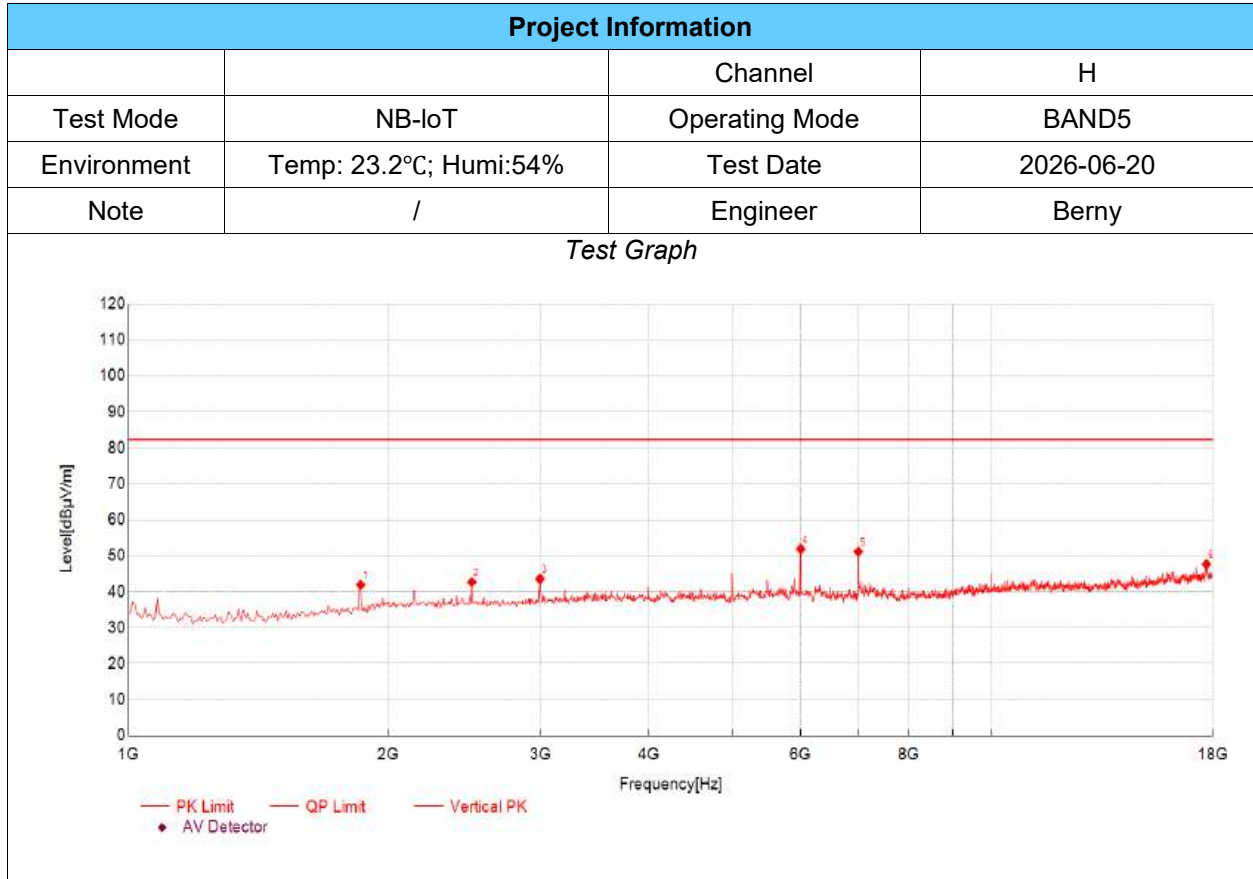

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1855.95         | 61.56          | 41.92          | -19.64        | 82.30          | 40.38       | PK  | Vertical | PASS    |
| 2                   | 2496.50         | 59.81          | 42.67          | -17.14        | 82.30          | 39.63       | PK  | Vertical | PASS    |
| 3                   | 2995.33         | 59.46          | 43.58          | -15.88        | 82.30          | 38.72       | PK  | Vertical | PASS    |
| 4                   | 5999.67         | 60.86          | 51.87          | -8.99         | 82.30          | 30.43       | PK  | Vertical | PASS    |
| 5                   | 6997.33         | 58.78          | 51.16          | -7.62         | 82.30          | 31.14       | PK  | Vertical | PASS    |
| 6                   | 17693.90        | 47.70          | 47.63          | -0.07         | 82.30          | 34.67       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m


# TX Radiated Test Result

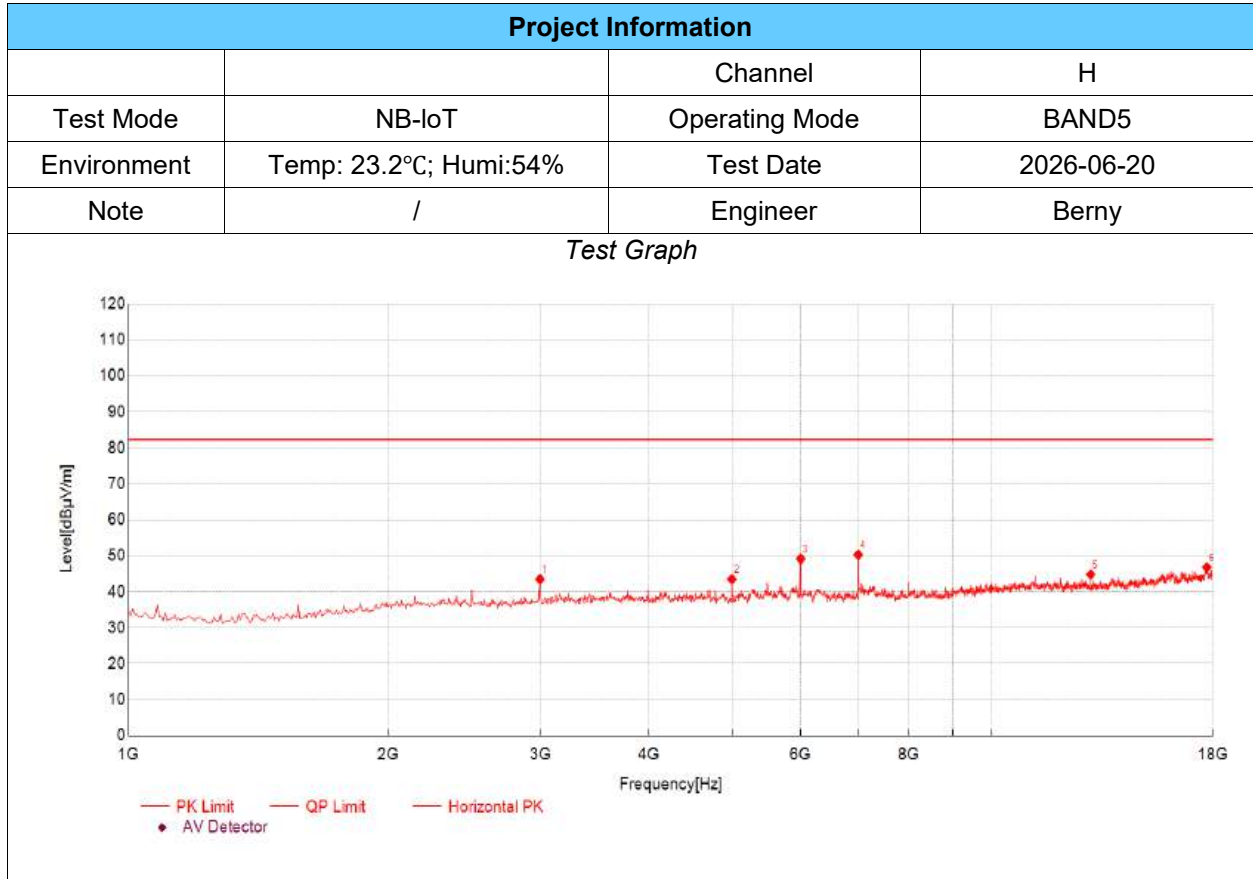

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2995.33         | 59.39          | 43.51          | -15.88        | 82.30          | 38.79       | PK  | Horizontal | PASS    |
| 2                   | 4996.33         | 54.59          | 43.49          | -11.10        | 82.30          | 38.81       | PK  | Horizontal | PASS    |
| 3                   | 5999.67         | 58.14          | 49.15          | -8.99         | 82.30          | 33.15       | PK  | Horizontal | PASS    |
| 4                   | 6997.33         | 57.88          | 50.26          | -7.62         | 82.30          | 32.04       | PK  | Horizontal | PASS    |
| 5                   | 13000.33        | 49.35          | 44.79          | -4.56         | 82.30          | 37.51       | PK  | Horizontal | PASS    |
| 6                   | 17716.57        | 46.41          | 46.77          | 0.36          | 82.30          | 35.53       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

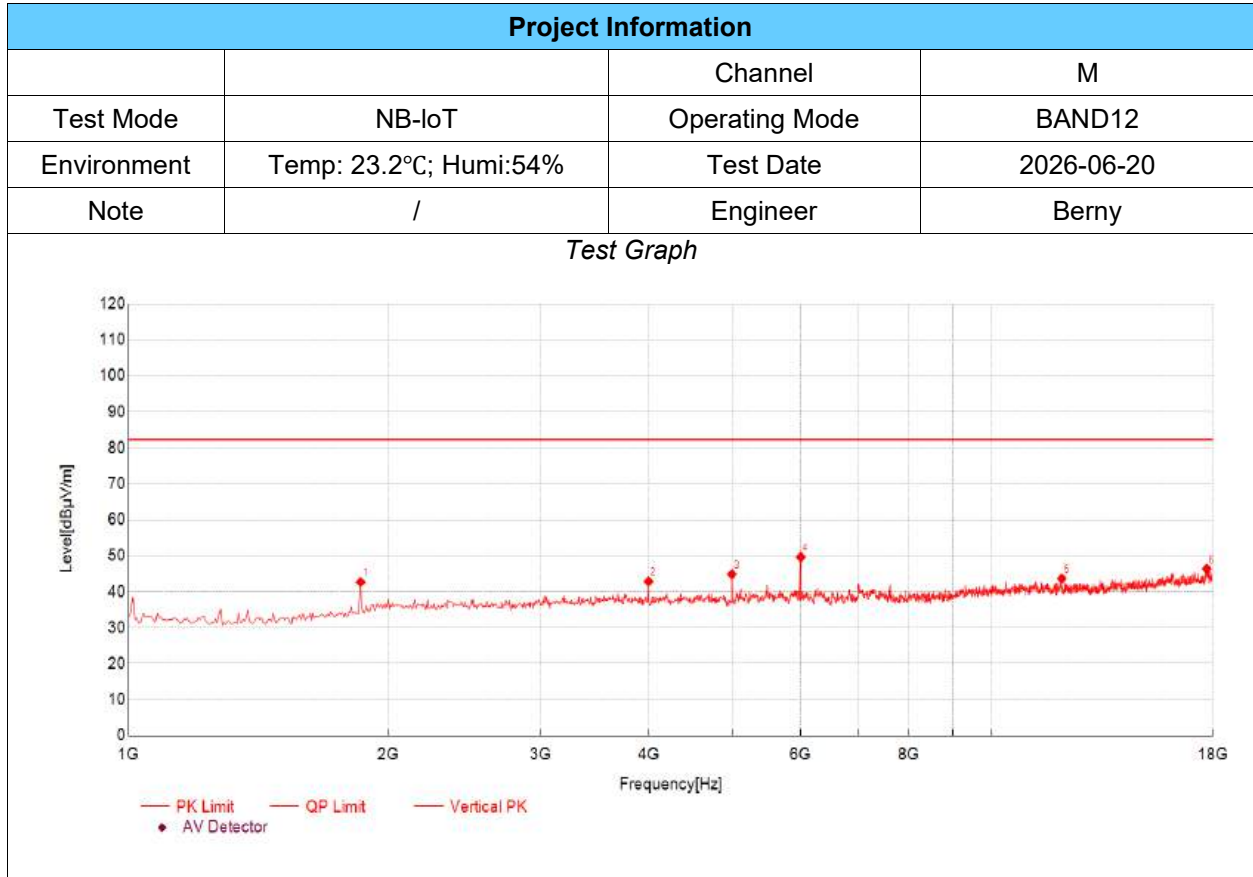


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1855.95         | 62.33          | 42.69          | -19.64        | 82.30          | 39.61       | PK  | Vertical | PASS    |
| 2                   | 3998.67         | 56.16          | 42.86          | -13.30        | 82.30          | 39.44       | PK  | Vertical | PASS    |
| 3                   | 4996.33         | 55.96          | 44.86          | -11.10        | 82.30          | 37.44       | PK  | Vertical | PASS    |
| 4                   | 5999.67         | 58.62          | 49.63          | -8.99         | 82.30          | 32.67       | PK  | Vertical | PASS    |
| 5                   | 12031.01        | 47.71          | 43.65          | -4.06         | 82.30          | 38.65       | PK  | Vertical | PASS    |
| 6                   | 17710.90        | 46.09          | 46.34          | 0.25          | 82.30          | 35.96       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

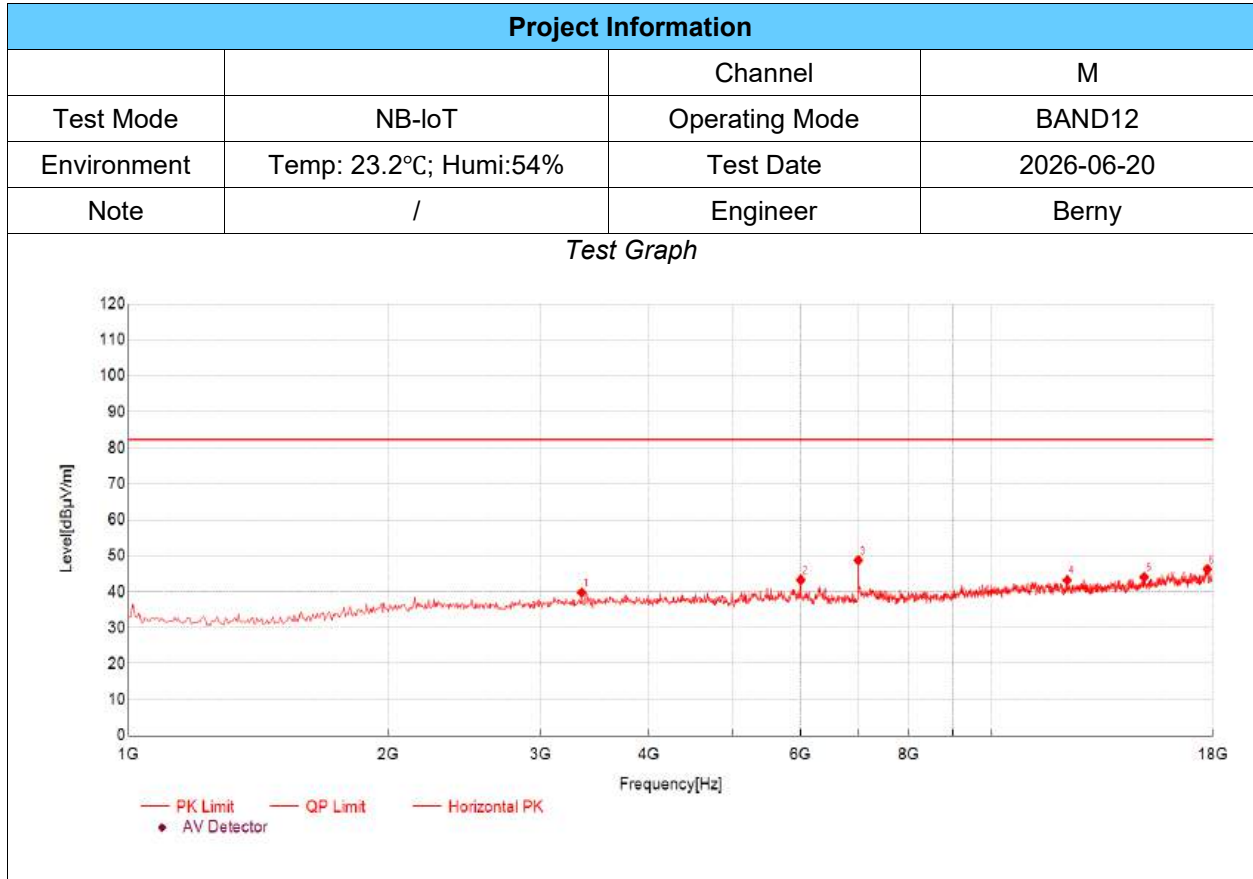


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 3346.78         | 54.47          | 39.77          | -14.70        | 82.30          | 42.53       | PK  | Horizontal | PASS    |
| 2                   | 5999.67         | 52.32          | 43.33          | -8.99         | 82.30          | 38.97       | PK  | Horizontal | PASS    |
| 3                   | 6997.33         | 56.38          | 48.76          | -7.62         | 82.30          | 33.54       | PK  | Horizontal | PASS    |
| 4                   | 12212.40        | 47.36          | 43.24          | -4.12         | 82.30          | 39.06       | PK  | Horizontal | PASS    |
| 5                   | 14990.00        | 46.94          | 44.05          | -2.89         | 82.30          | 38.25       | PK  | Horizontal | PASS    |
| 6                   | 17739.25        | 45.71          | 46.24          | 0.53          | 82.30          | 36.06       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

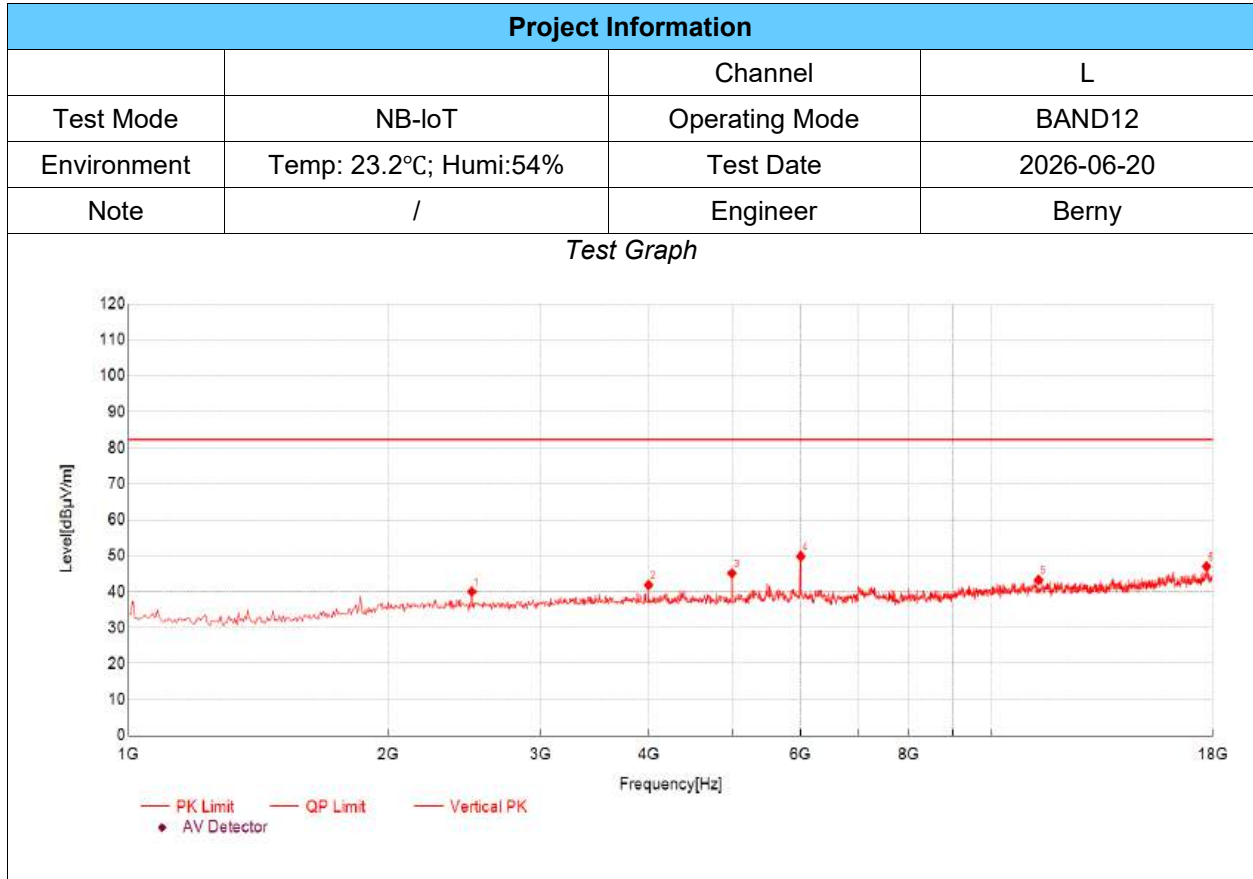


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2496.50         | 57.14          | 40.00          | -17.14        | 82.30          | 42.30       | PK  | Vertical | PASS    |
| 2                   | 3998.67         | 55.17          | 41.87          | -13.30        | 82.30          | 40.43       | PK  | Vertical | PASS    |
| 3                   | 4996.33         | 56.22          | 45.12          | -11.10        | 82.30          | 37.18       | PK  | Vertical | PASS    |
| 4                   | 5999.67         | 58.83          | 49.84          | -8.99         | 82.30          | 32.46       | PK  | Vertical | PASS    |
| 5                   | 11311.10        | 48.19          | 43.26          | -4.93         | 82.30          | 39.04       | PK  | Vertical | PASS    |
| 6                   | 17699.57        | 47.01          | 47.03          | 0.02          | 82.30          | 35.27       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

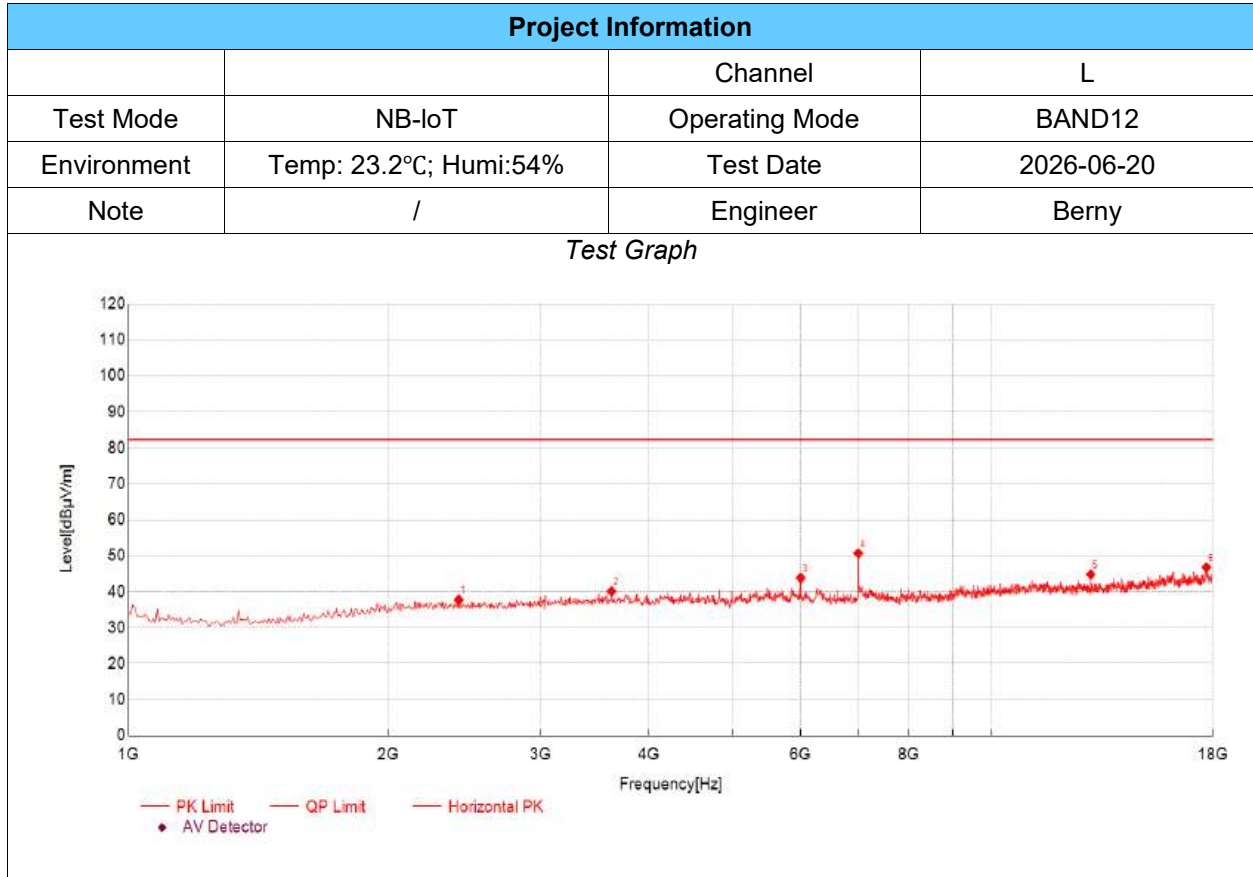


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2411.47         | 55.18          | 37.77          | -17.41        | 82.30          | 44.53       | PK  | Horizontal | PASS    |
| 2                   | 3624.54         | 53.89          | 40.11          | -13.78        | 82.30          | 42.19       | PK  | Horizontal | PASS    |
| 3                   | 5999.67         | 52.85          | 43.86          | -8.99         | 82.30          | 38.44       | PK  | Horizontal | PASS    |
| 4                   | 6997.33         | 58.31          | 50.69          | -7.62         | 82.30          | 31.61       | PK  | Horizontal | PASS    |
| 5                   | 13000.33        | 49.37          | 44.81          | -4.56         | 82.30          | 37.49       | PK  | Horizontal | PASS    |
| 6                   | 17693.90        | 46.85          | 46.78          | -0.07         | 82.30          | 35.52       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

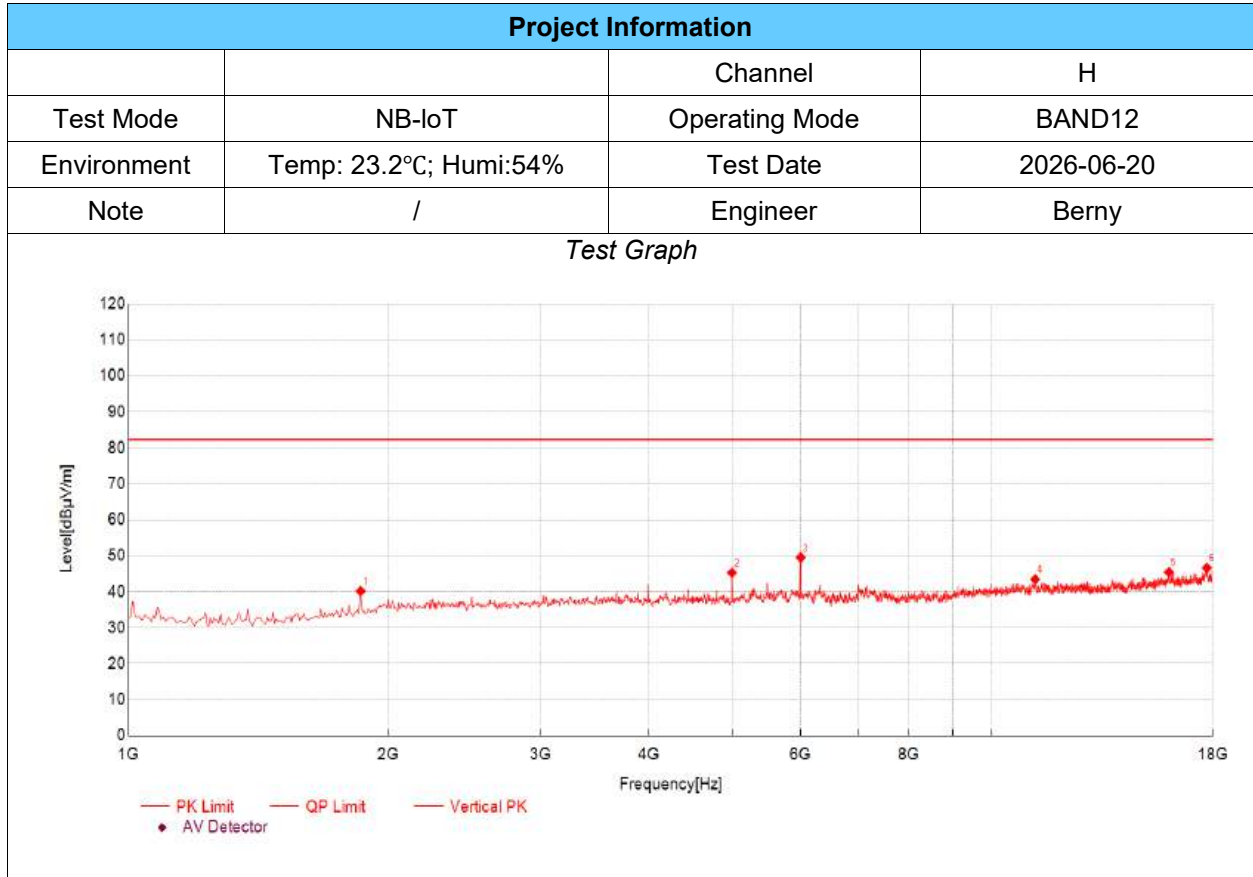

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1855.95         | 59.81          | 40.17          | -19.64        | 82.30          | 42.13       | PK  | Vertical | PASS    |
| 2                   | 4996.33         | 56.37          | 45.27          | -11.10        | 82.30          | 37.03       | PK  | Vertical | PASS    |
| 3                   | 5999.67         | 58.52          | 49.53          | -8.99         | 82.30          | 32.77       | PK  | Vertical | PASS    |
| 4                   | 11214.74        | 46.79          | 43.46          | -3.33         | 82.30          | 38.84       | PK  | Vertical | PASS    |
| 5                   | 16016.01        | 47.20          | 45.44          | -1.76         | 82.30          | 36.86       | PK  | Vertical | PASS    |
| 6                   | 17716.57        | 46.26          | 46.62          | 0.36          | 82.30          | 35.68       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | H          |
| Test Mode           | NB-IoT                 | Operating Mode | BAND12     |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

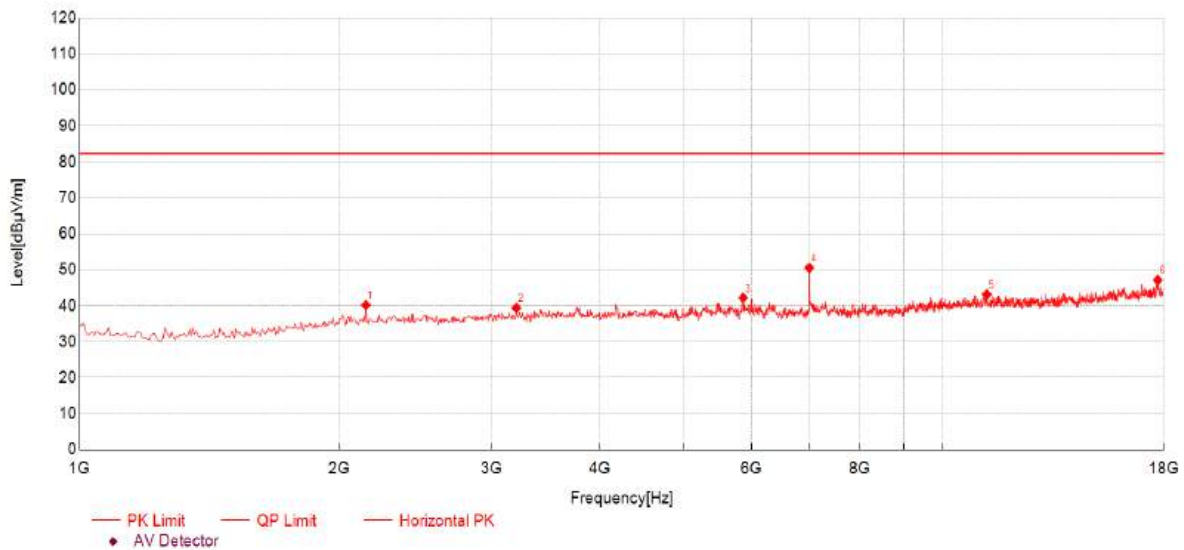


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2145.05         | 58.15          | 40.15          | -18.00        | 82.30          | 42.15       | PK  | Horizontal | PASS    |
| 2                   | 3205.07         | 54.45          | 39.39          | -15.06        | 82.30          | 42.91       | PK  | Horizontal | PASS    |
| 3                   | 5863.62         | 50.46          | 42.19          | -8.27         | 82.30          | 40.11       | PK  | Horizontal | PASS    |
| 4                   | 6997.33         | 58.16          | 50.54          | -7.62         | 82.30          | 31.76       | PK  | Horizontal | PASS    |
| 5                   | 11231.74        | 47.23          | 43.21          | -4.02         | 82.30          | 39.09       | PK  | Horizontal | PASS    |
| 6                   | 17710.90        | 46.86          | 47.11          | 0.25          | 82.30          | 35.19       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

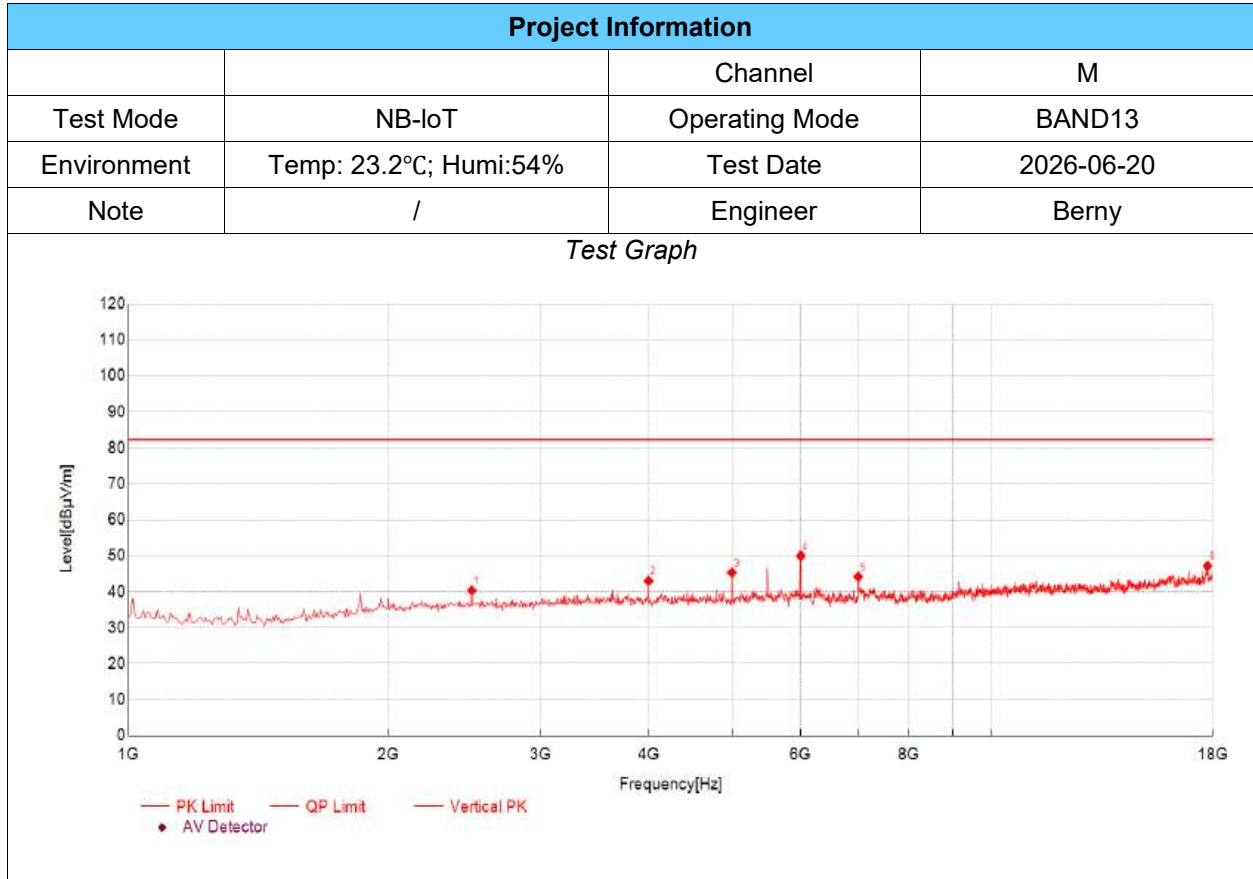


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2496.50         | 57.48          | 40.34          | -17.14        | 82.30          | 41.96       | PK  | Vertical | PASS    |
| 2                   | 3998.67         | 56.32          | 43.02          | -13.30        | 82.30          | 39.28       | PK  | Vertical | PASS    |
| 3                   | 4996.33         | 56.40          | 45.30          | -11.10        | 82.30          | 37.00       | PK  | Vertical | PASS    |
| 4                   | 5999.67         | 58.96          | 49.97          | -8.99         | 82.30          | 32.33       | PK  | Vertical | PASS    |
| 5                   | 6997.33         | 51.79          | 44.17          | -7.62         | 82.30          | 38.13       | PK  | Vertical | PASS    |
| 6                   | 17750.58        | 46.61          | 47.13          | 0.52          | 82.30          | 35.17       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

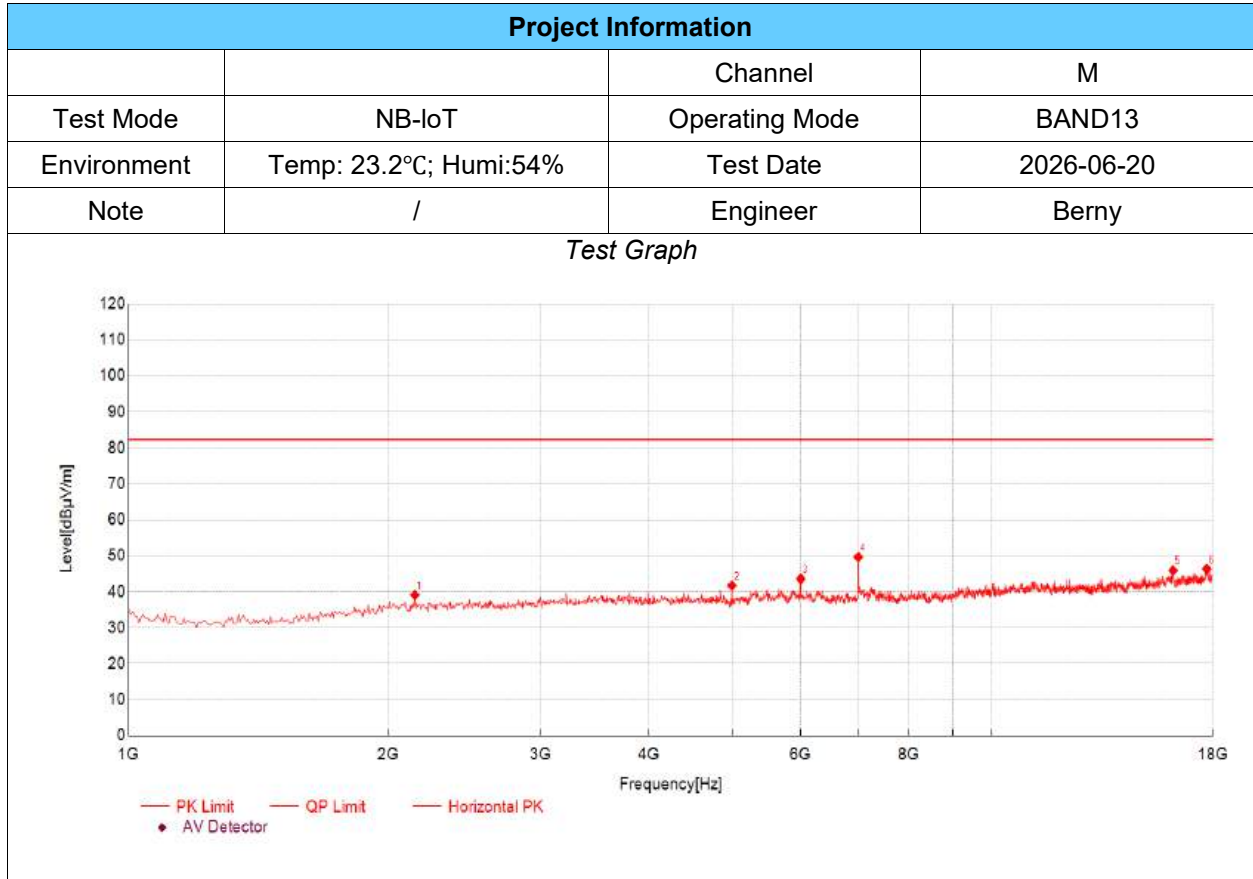


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2145.05         | 57.08          | 39.08          | -18.00        | 82.30          | 43.22       | PK  | Horizontal | PASS    |
| 2                   | 4996.33         | 52.83          | 41.73          | -11.10        | 82.30          | 40.57       | PK  | Horizontal | PASS    |
| 3                   | 5999.67         | 52.59          | 43.60          | -8.99         | 82.30          | 38.70       | PK  | Horizontal | PASS    |
| 4                   | 6997.33         | 57.26          | 49.64          | -7.62         | 82.30          | 32.66       | PK  | Horizontal | PASS    |
| 5                   | 16186.06        | 46.03          | 45.91          | -0.12         | 82.30          | 36.39       | PK  | Horizontal | PASS    |
| 6                   | 17710.90        | 46.06          | 46.31          | 0.25          | 82.30          | 35.99       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

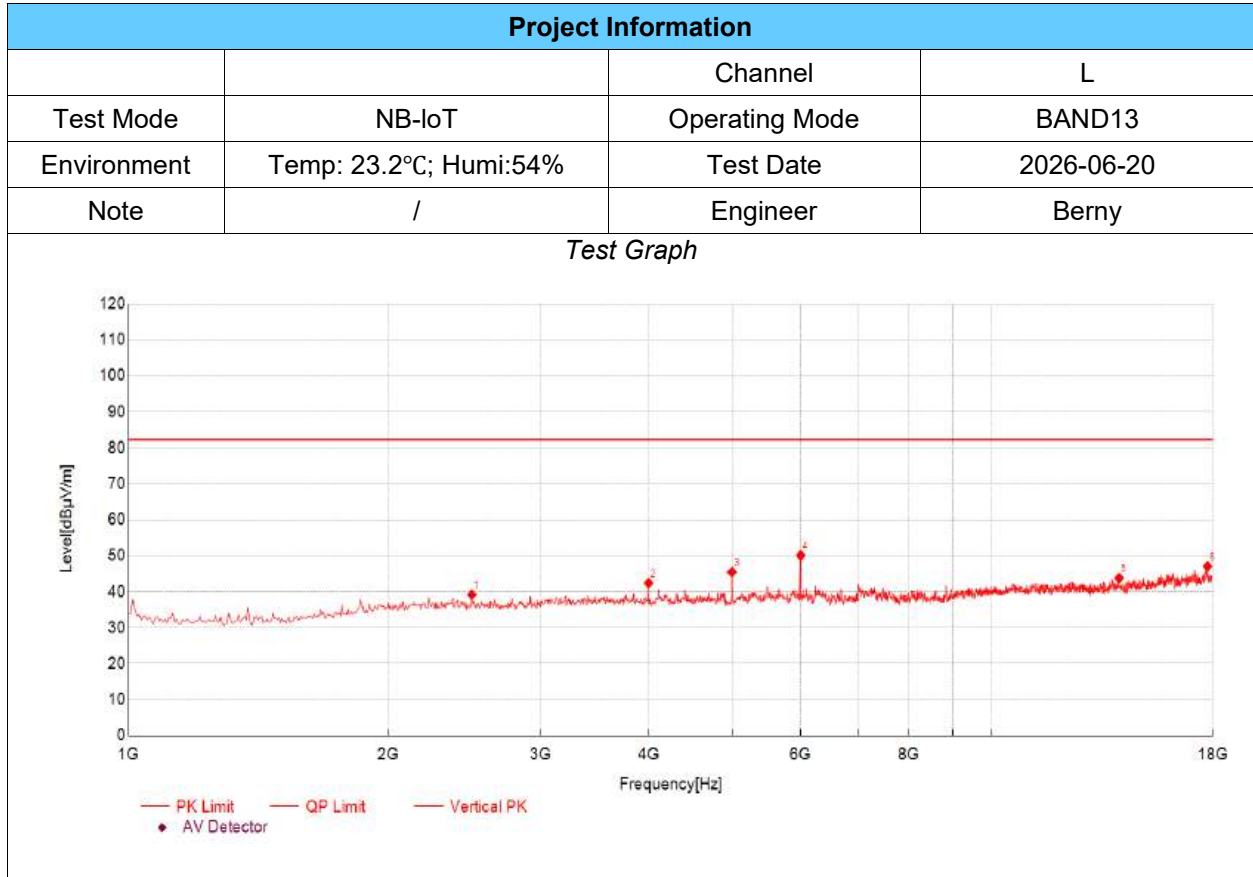


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2496.50         | 56.30          | 39.16          | -17.14        | 82.30          | 43.14       | PK  | Vertical | PASS    |
| 2                   | 3998.67         | 55.69          | 42.39          | -13.30        | 82.30          | 39.91       | PK  | Vertical | PASS    |
| 3                   | 4996.33         | 56.54          | 45.44          | -11.10        | 82.30          | 36.86       | PK  | Vertical | PASS    |
| 4                   | 5999.67         | 59.10          | 50.11          | -8.99         | 82.30          | 32.19       | PK  | Vertical | PASS    |
| 5                   | 14020.67        | 47.28          | 43.80          | -3.48         | 82.30          | 38.50       | PK  | Vertical | PASS    |
| 6                   | 17750.58        | 46.53          | 47.05          | 0.52          | 82.30          | 35.25       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

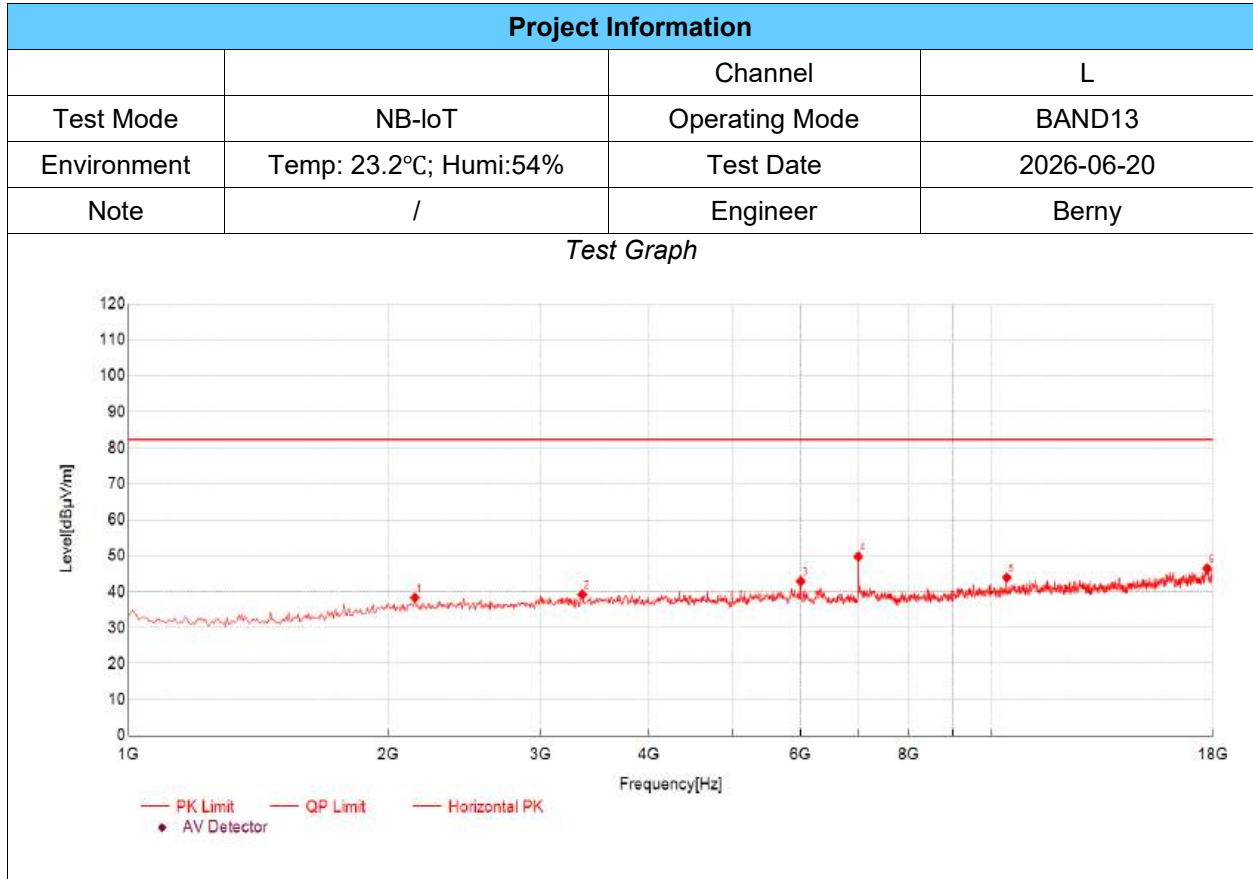

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2145.05         | 56.36          | 38.36          | -18.00        | 82.30          | 43.94       | PK  | Horizontal | PASS    |
| 2                   | 3352.45         | 53.89          | 39.21          | -14.68        | 82.30          | 43.09       | PK  | Horizontal | PASS    |
| 3                   | 5999.67         | 51.88          | 42.89          | -8.99         | 82.30          | 39.41       | PK  | Horizontal | PASS    |
| 4                   | 6997.33         | 57.40          | 49.78          | -7.62         | 82.30          | 32.52       | PK  | Horizontal | PASS    |
| 5                   | 10392.80        | 49.65          | 43.94          | -5.71         | 82.30          | 38.36       | PK  | Horizontal | PASS    |
| 6                   | 17727.91        | 45.89          | 46.40          | 0.51          | 82.30          | 35.90       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

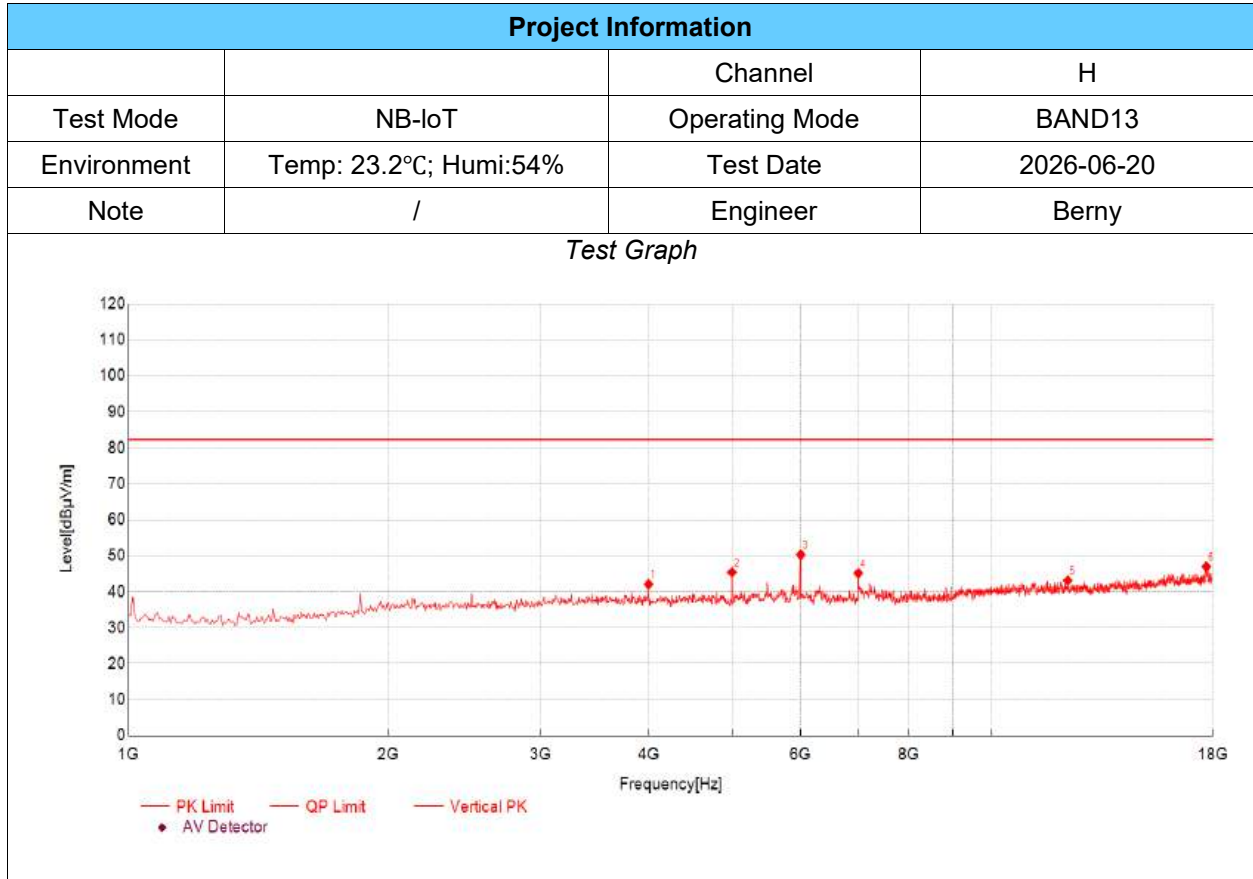


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 3998.67         | 55.38          | 42.08          | -13.30        | 82.30          | 40.22       | PK  | Vertical | PASS    |
| 2                   | 4996.33         | 56.49          | 45.39          | -11.10        | 82.30          | 36.91       | PK  | Vertical | PASS    |
| 3                   | 5999.67         | 59.27          | 50.28          | -8.99         | 82.30          | 32.02       | PK  | Vertical | PASS    |
| 4                   | 6997.33         | 52.77          | 45.15          | -7.62         | 82.30          | 37.15       | PK  | Vertical | PASS    |
| 5                   | 12229.41        | 47.53          | 43.14          | -4.39         | 82.30          | 39.16       | PK  | Vertical | PASS    |
| 6                   | 17688.23        | 47.15          | 46.98          | -0.17         | 82.30          | 35.32       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

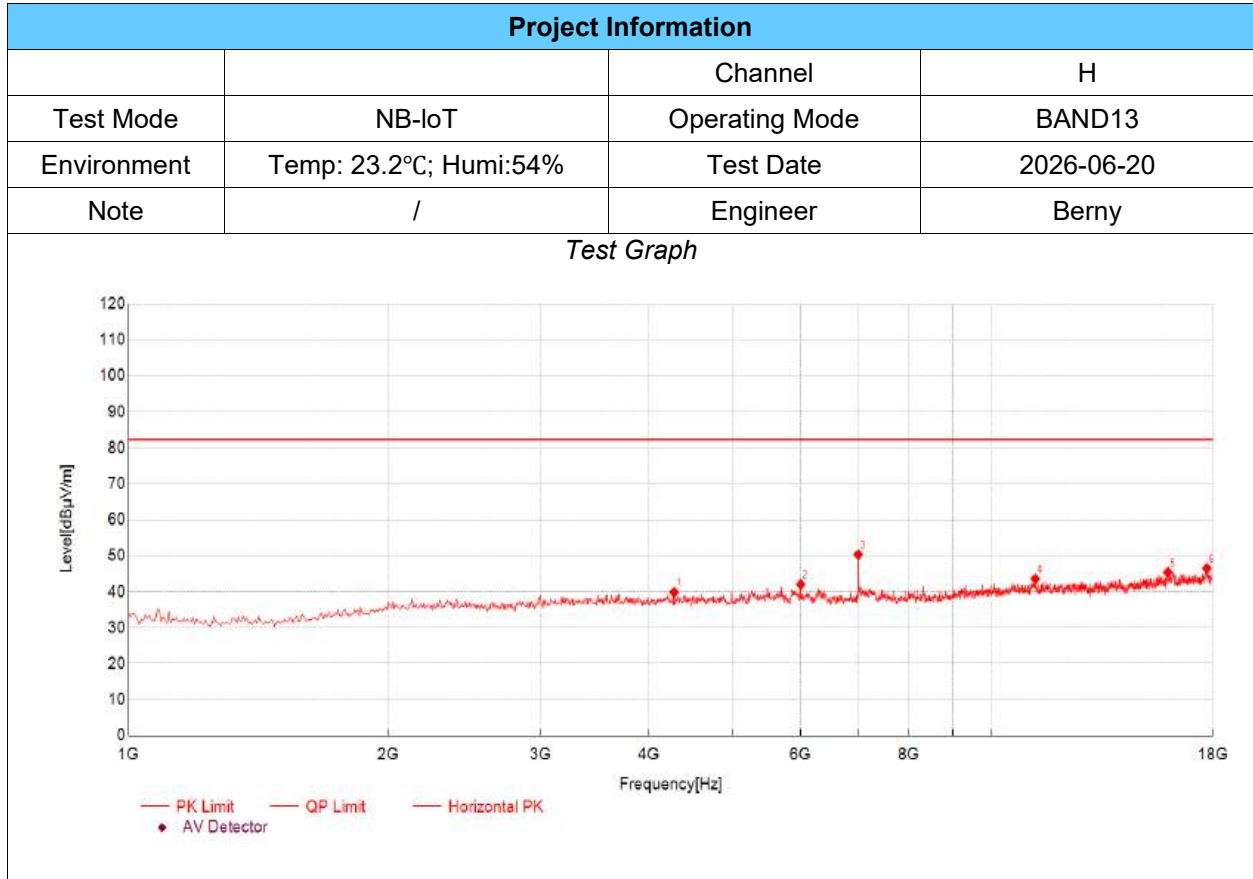


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 4282.09         | 52.57          | 39.83          | -12.74        | 82.30          | 42.47       | PK  | Horizontal | PASS    |
| 2                   | 5999.67         | 51.01          | 42.02          | -8.99         | 82.30          | 40.28       | PK  | Horizontal | PASS    |
| 3                   | 6997.33         | 57.94          | 50.32          | -7.62         | 82.30          | 31.98       | PK  | Horizontal | PASS    |
| 4                   | 11220.41        | 47.15          | 43.60          | -3.55         | 82.30          | 38.70       | PK  | Horizontal | PASS    |
| 5                   | 15970.66        | 46.77          | 45.37          | -1.40         | 82.30          | 36.93       | PK  | Horizontal | PASS    |
| 6                   | 17716.57        | 46.12          | 46.48          | 0.36          | 82.30          | 35.82       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

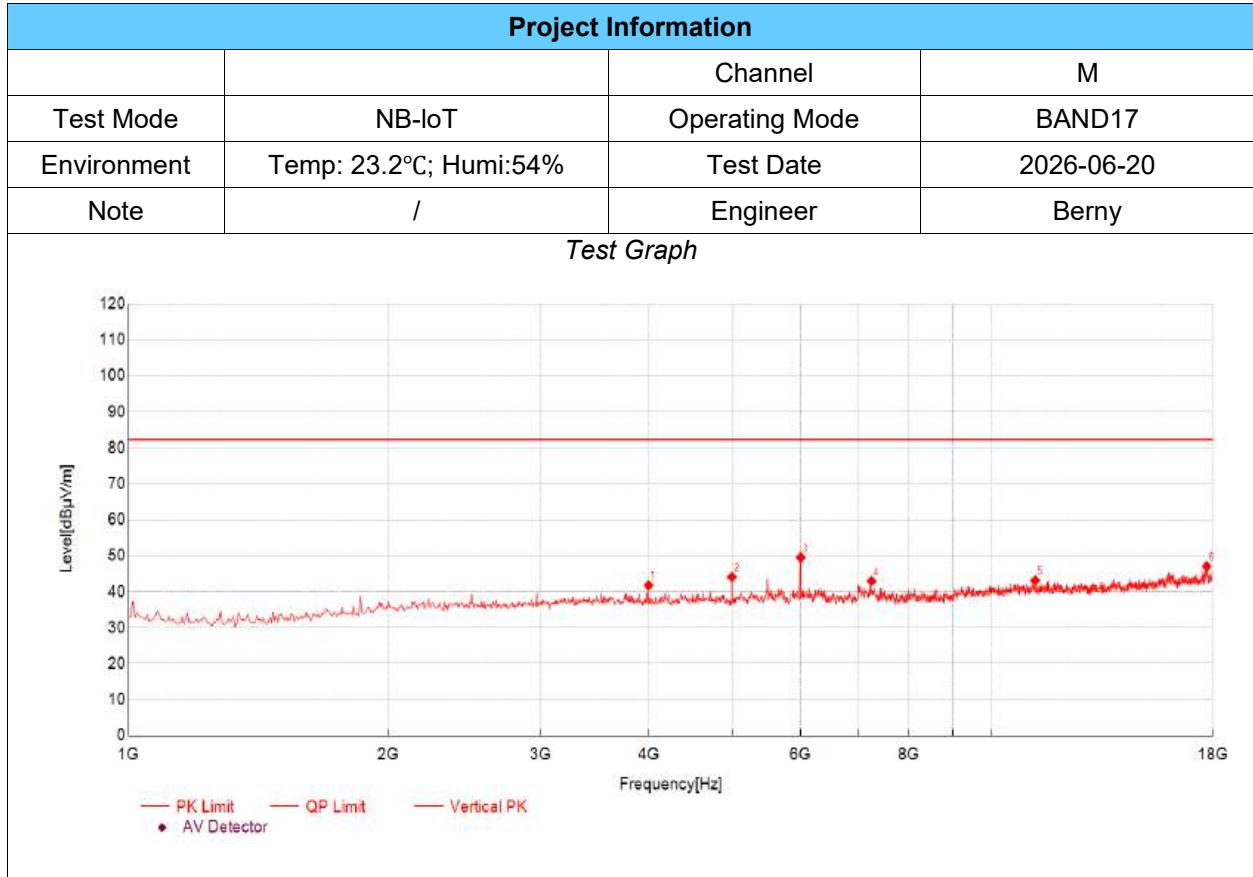


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 3998.67         | 55.08          | 41.78          | -13.30        | 82.30          | 40.52       | PK  | Vertical | PASS    |
| 2                   | 4996.33         | 55.20          | 44.10          | -11.10        | 82.30          | 38.20       | PK  | Vertical | PASS    |
| 3                   | 5999.67         | 58.50          | 49.51          | -8.99         | 82.30          | 32.79       | PK  | Vertical | PASS    |
| 4                   | 7246.75         | 50.55          | 42.96          | -7.59         | 82.30          | 39.34       | PK  | Vertical | PASS    |
| 5                   | 11214.74        | 46.49          | 43.16          | -3.33         | 82.30          | 39.14       | PK  | Vertical | PASS    |
| 6                   | 17705.24        | 46.91          | 47.05          | 0.14          | 82.30          | 35.25       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

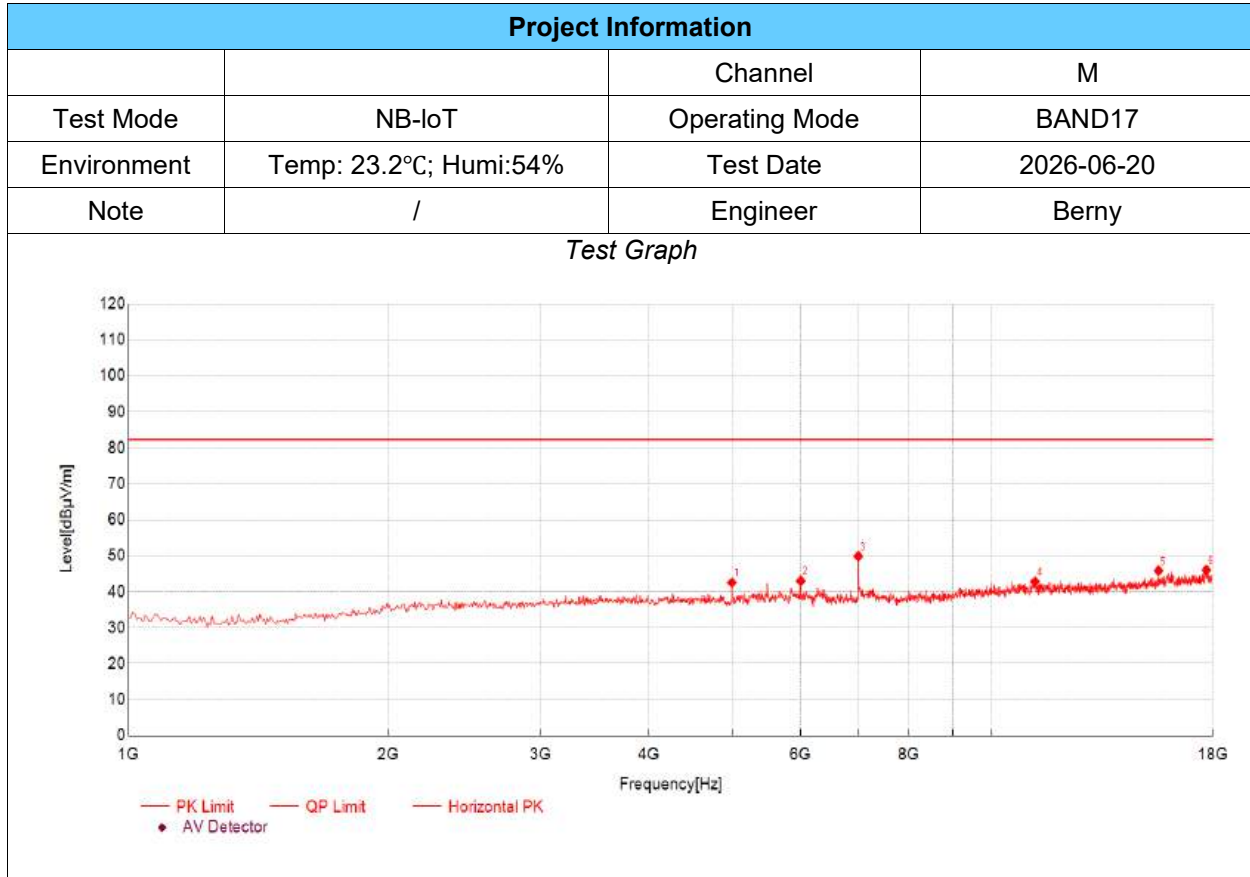


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 4996.33         | 53.62          | 42.52          | -11.10        | 82.30          | 39.78       | PK  | Horizontal | PASS    |
| 2                   | 5999.67         | 51.98          | 42.99          | -8.99         | 82.30          | 39.31       | PK  | Horizontal | PASS    |
| 3                   | 6997.33         | 57.51          | 49.89          | -7.62         | 82.30          | 32.41       | PK  | Horizontal | PASS    |
| 4                   | 11209.07        | 46.46          | 42.87          | -3.59         | 82.30          | 39.43       | PK  | Horizontal | PASS    |
| 5                   | 15573.86        | 48.55          | 45.84          | -2.71         | 82.30          | 36.46       | PK  | Horizontal | PASS    |
| 6                   | 17688.23        | 46.18          | 46.01          | -0.17         | 82.30          | 36.29       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

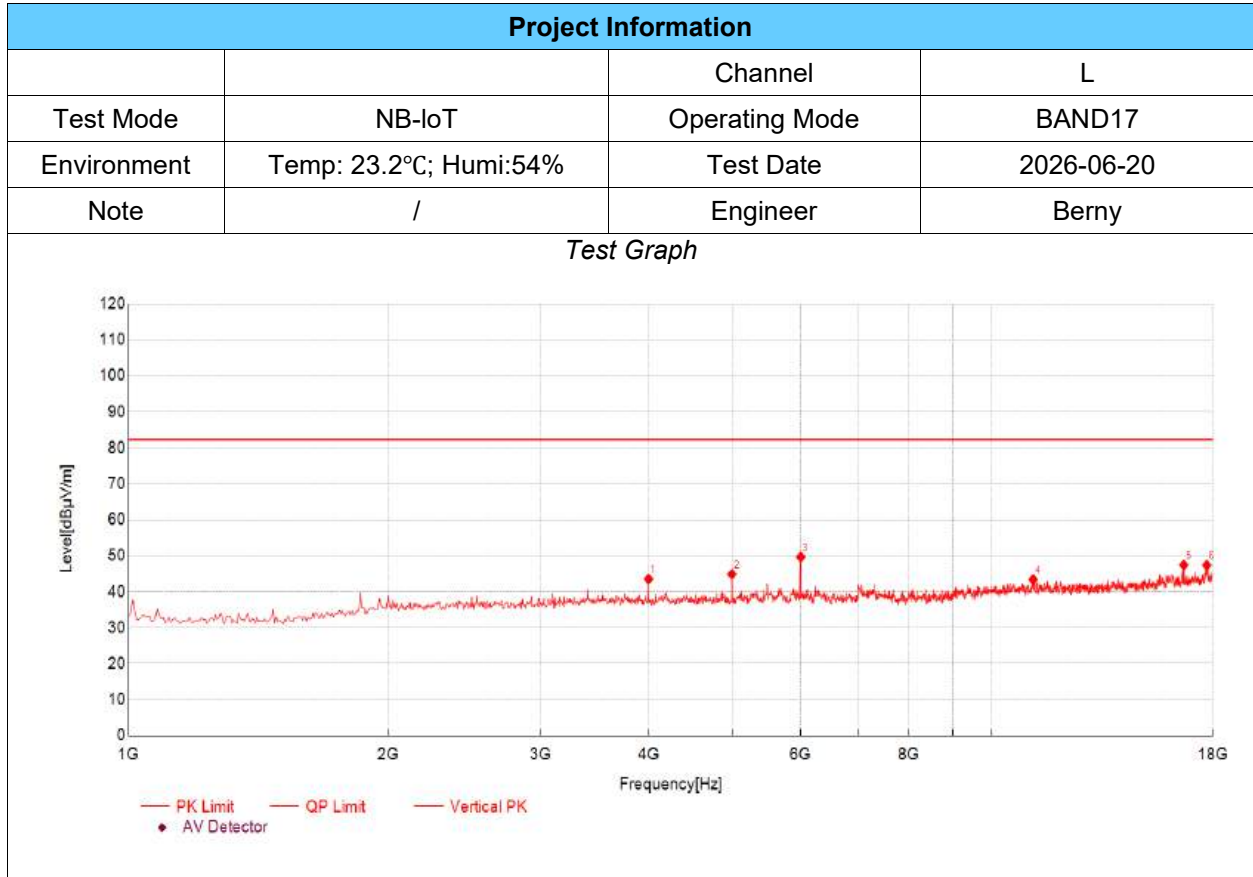


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 3998.67         | 56.83          | 43.53          | -13.30        | 82.30          | 38.77       | PK  | Vertical | PASS    |
| 2                   | 4996.33         | 55.98          | 44.88          | -11.10        | 82.30          | 37.42       | PK  | Vertical | PASS    |
| 3                   | 5999.67         | 58.65          | 49.66          | -8.99         | 82.30          | 32.64       | PK  | Vertical | PASS    |
| 4                   | 11152.38        | 47.50          | 43.42          | -4.08         | 82.30          | 38.88       | PK  | Vertical | PASS    |
| 5                   | 16662.22        | 48.72          | 47.42          | -1.30         | 82.30          | 34.88       | PK  | Vertical | PASS    |
| 6                   | 17710.90        | 47.11          | 47.36          | 0.25          | 82.30          | 34.94       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

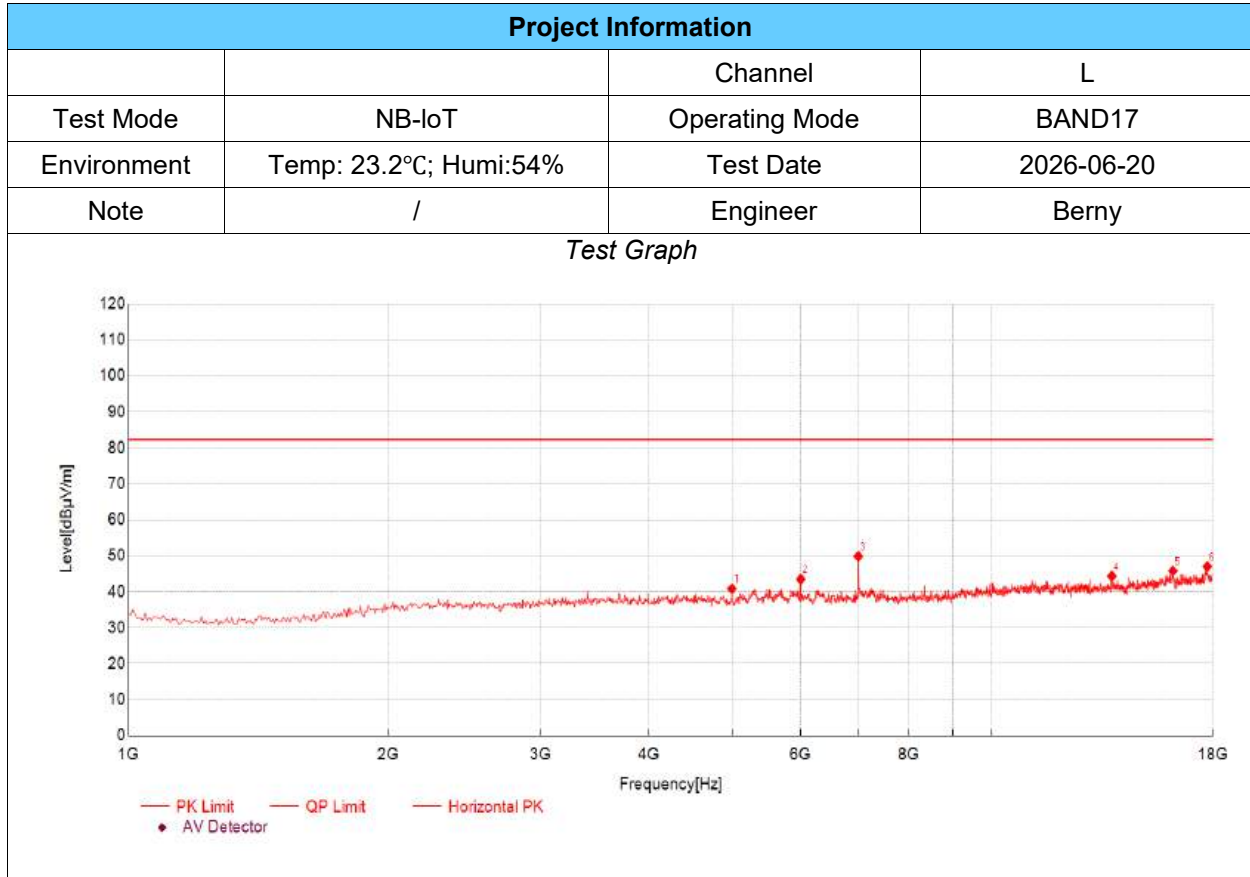


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 4996.33         | 51.91          | 40.81          | -11.10        | 82.30          | 41.49       | PK  | Horizontal | PASS    |
| 2                   | 5999.67         | 52.50          | 43.51          | -8.99         | 82.30          | 38.79       | PK  | Horizontal | PASS    |
| 3                   | 6997.33         | 57.49          | 49.87          | -7.62         | 82.30          | 32.43       | PK  | Horizontal | PASS    |
| 4                   | 13754.25        | 47.58          | 44.34          | -3.24         | 82.30          | 37.96       | PK  | Horizontal | PASS    |
| 5                   | 16180.39        | 45.76          | 45.77          | 0.01          | 82.30          | 36.53       | PK  | Horizontal | PASS    |
| 6                   | 17739.25        | 46.48          | 47.01          | 0.53          | 82.30          | 35.29       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

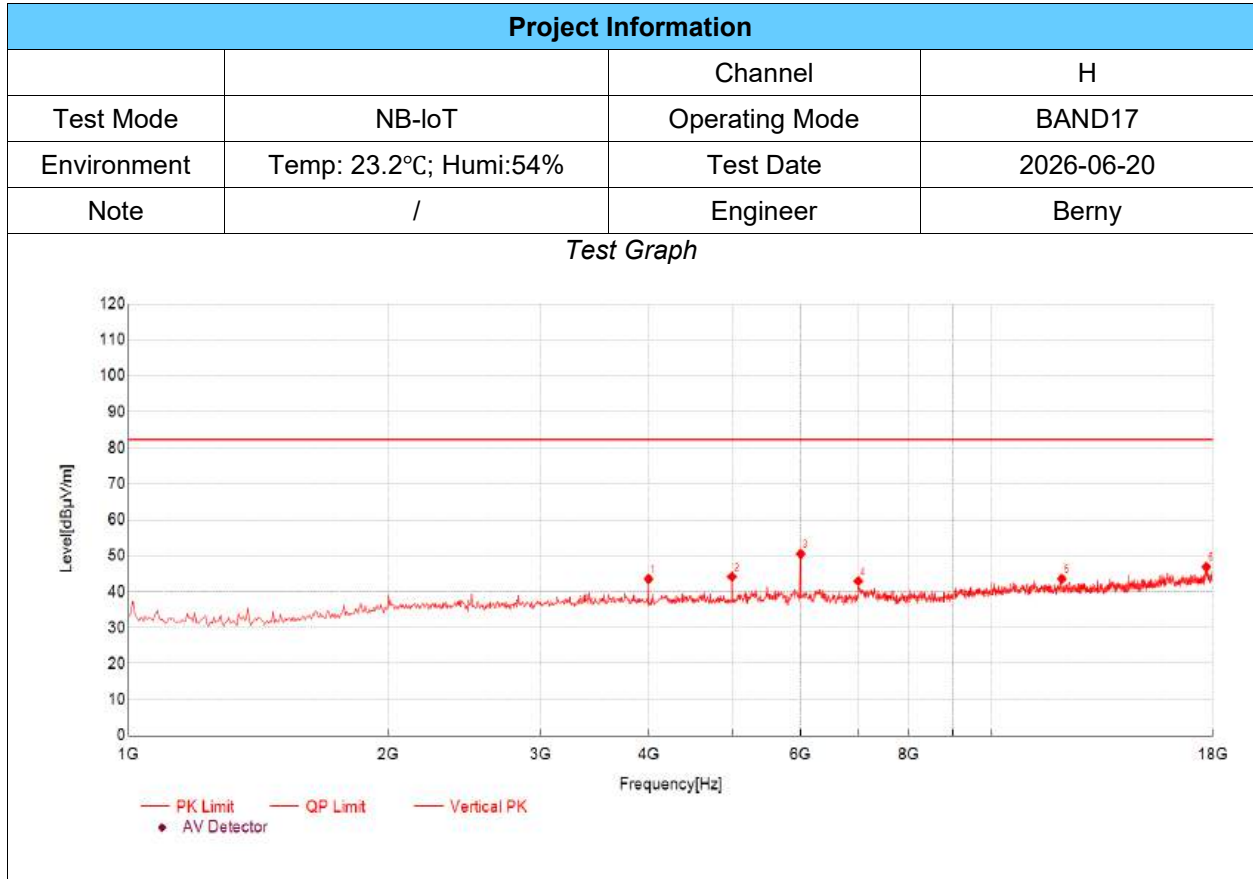


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 3998.67         | 56.87          | 43.57          | -13.30        | 82.30          | 38.73       | PK  | Vertical | PASS    |
| 2                   | 4996.33         | 55.28          | 44.18          | -11.10        | 82.30          | 38.12       | PK  | Vertical | PASS    |
| 3                   | 5999.67         | 59.50          | 50.51          | -8.99         | 82.30          | 31.79       | PK  | Vertical | PASS    |
| 4                   | 6997.33         | 50.58          | 42.96          | -7.62         | 82.30          | 39.34       | PK  | Vertical | PASS    |
| 5                   | 12031.01        | 47.67          | 43.61          | -4.06         | 82.30          | 38.69       | PK  | Vertical | PASS    |
| 6                   | 17688.23        | 47.07          | 46.90          | -0.17         | 82.30          | 35.40       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

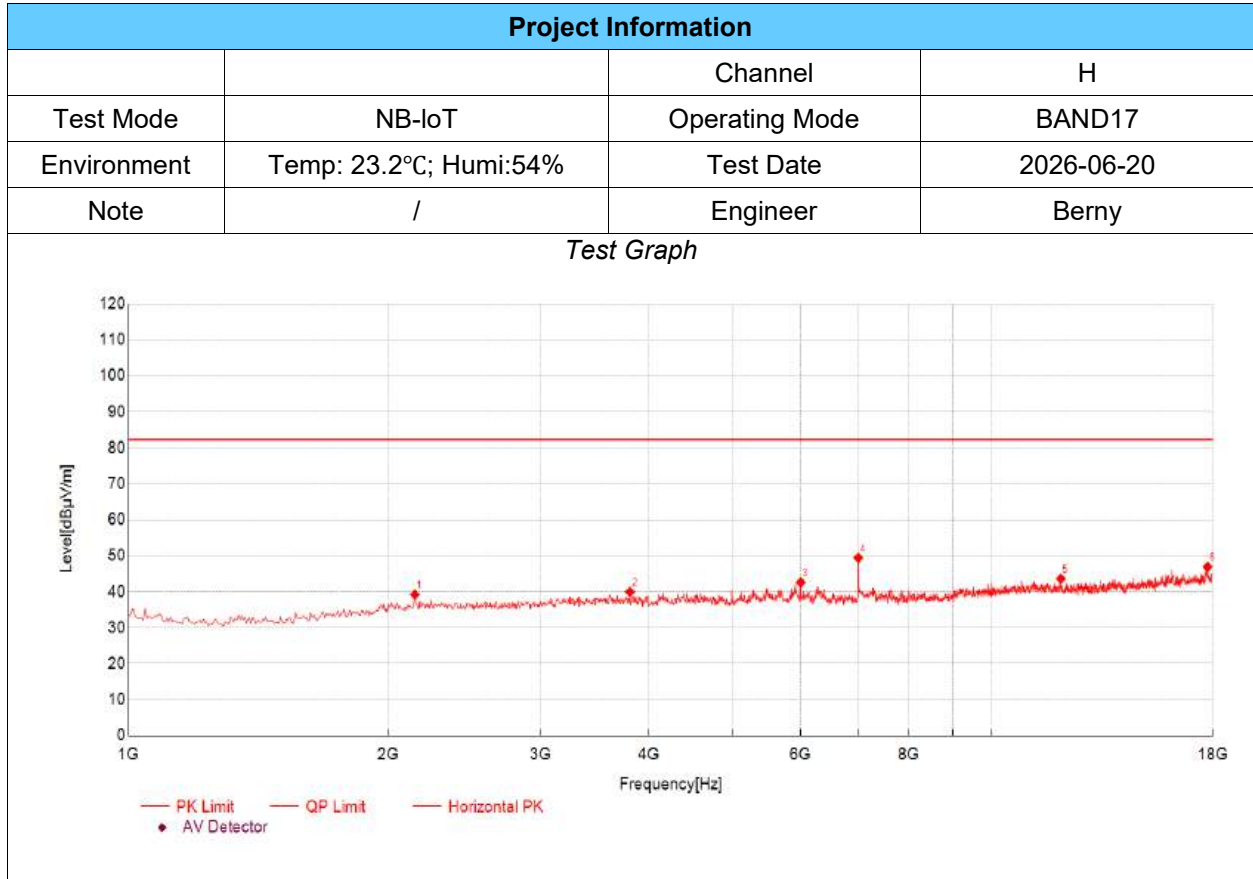

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2145.05         | 57.19          | 39.19          | -18.00        | 82.30          | 43.11       | PK  | Horizontal | PASS    |
| 2                   | 3805.94         | 53.56          | 39.94          | -13.62        | 82.30          | 42.36       | PK  | Horizontal | PASS    |
| 3                   | 5999.67         | 51.55          | 42.56          | -8.99         | 82.30          | 39.74       | PK  | Horizontal | PASS    |
| 4                   | 6997.33         | 57.04          | 49.42          | -7.62         | 82.30          | 32.88       | PK  | Horizontal | PASS    |
| 5                   | 12002.67        | 47.66          | 43.63          | -4.03         | 82.30          | 38.67       | PK  | Horizontal | PASS    |
| 6                   | 17750.58        | 46.38          | 46.90          | 0.52          | 82.30          | 35.40       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

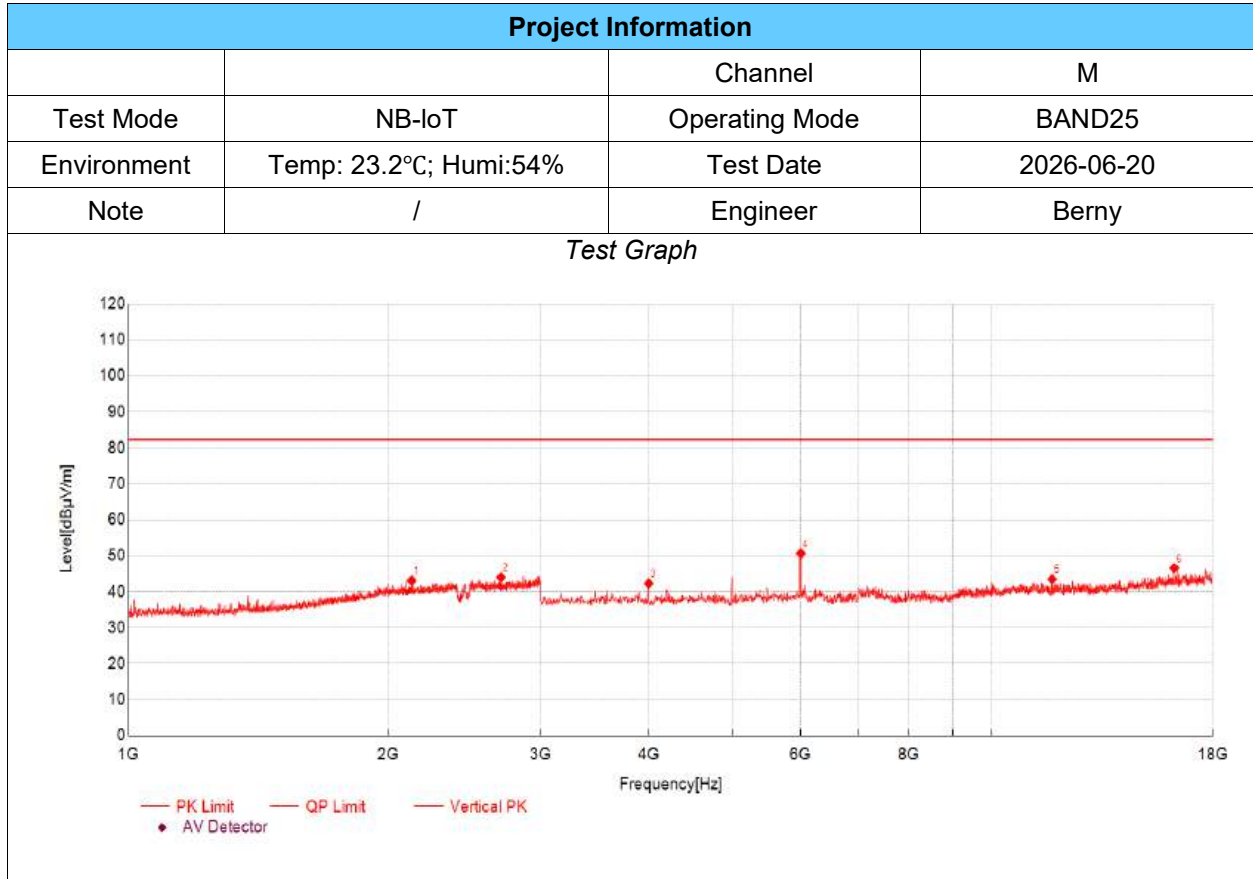


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2127.04         | 52.16          | 43.09          | -9.07         | 82.30          | 39.21       | PK  | Vertical | PASS    |
| 2                   | 2699.90         | 52.43          | 44.00          | -8.43         | 82.30          | 38.30       | PK  | Vertical | PASS    |
| 3                   | 4000.33         | 55.64          | 42.29          | -13.35        | 82.30          | 40.01       | PK  | Vertical | PASS    |
| 4                   | 6001.00         | 59.52          | 50.66          | -8.86         | 82.30          | 31.64       | PK  | Vertical | PASS    |
| 5                   | 11727.91        | 48.60          | 43.49          | -5.11         | 82.30          | 38.81       | PK  | Vertical | PASS    |
| 6                   | 16239.41        | 47.29          | 46.56          | -0.73         | 82.30          | 35.74       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

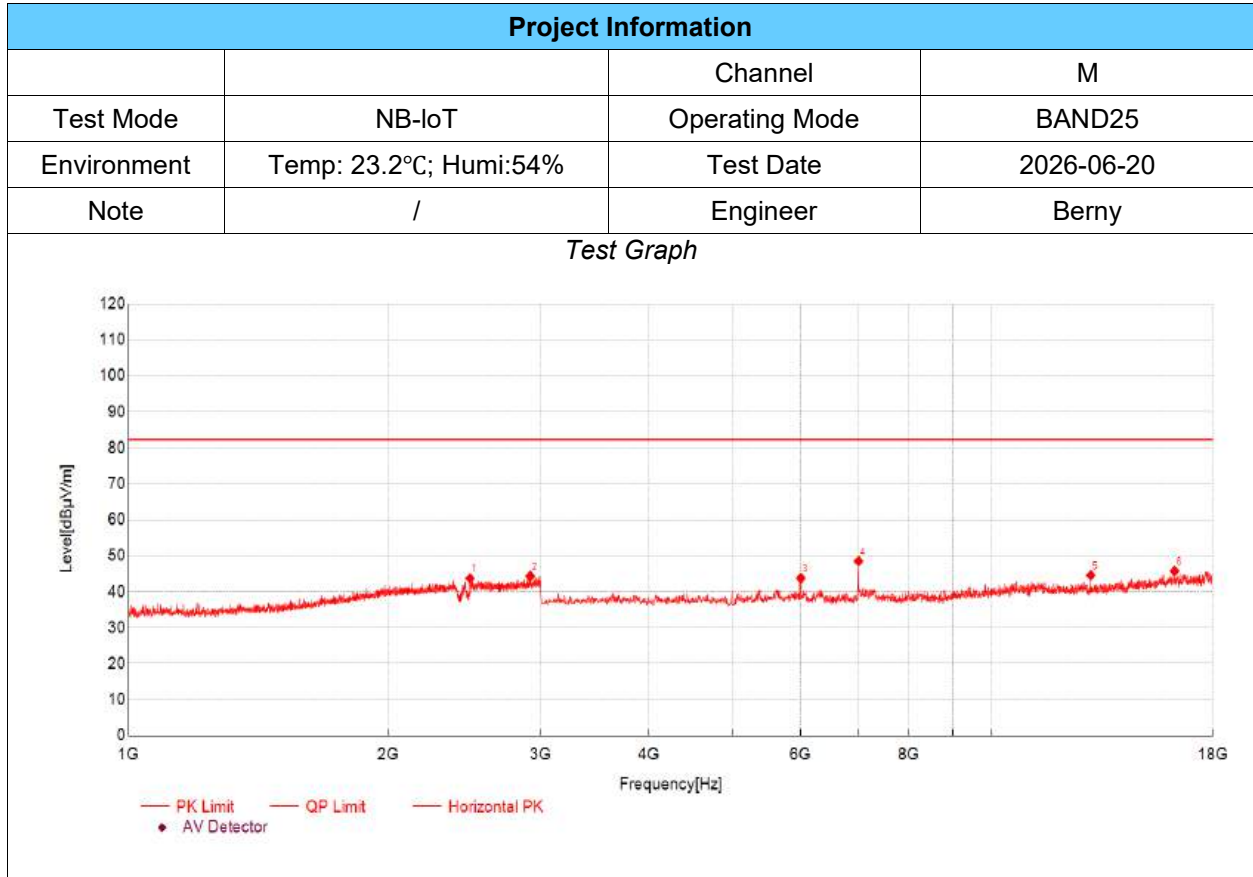

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2485.16         | 52.15          | 43.72          | -8.43         | 82.30          | 38.58       | PK  | Horizontal | PASS    |
| 2                   | 2917.31         | 51.97          | 44.34          | -7.63         | 82.30          | 37.96       | PK  | Horizontal | PASS    |
| 3                   | 6001.00         | 52.64          | 43.78          | -8.86         | 82.30          | 38.52       | PK  | Horizontal | PASS    |
| 4                   | 7001.33         | 56.33          | 48.52          | -7.81         | 82.30          | 33.78       | PK  | Horizontal | PASS    |
| 5                   | 13003.33        | 49.08          | 44.59          | -4.49         | 82.30          | 37.71       | PK  | Horizontal | PASS    |
| 6                   | 16254.42        | 46.42          | 45.73          | -0.69         | 82.30          | 36.57       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

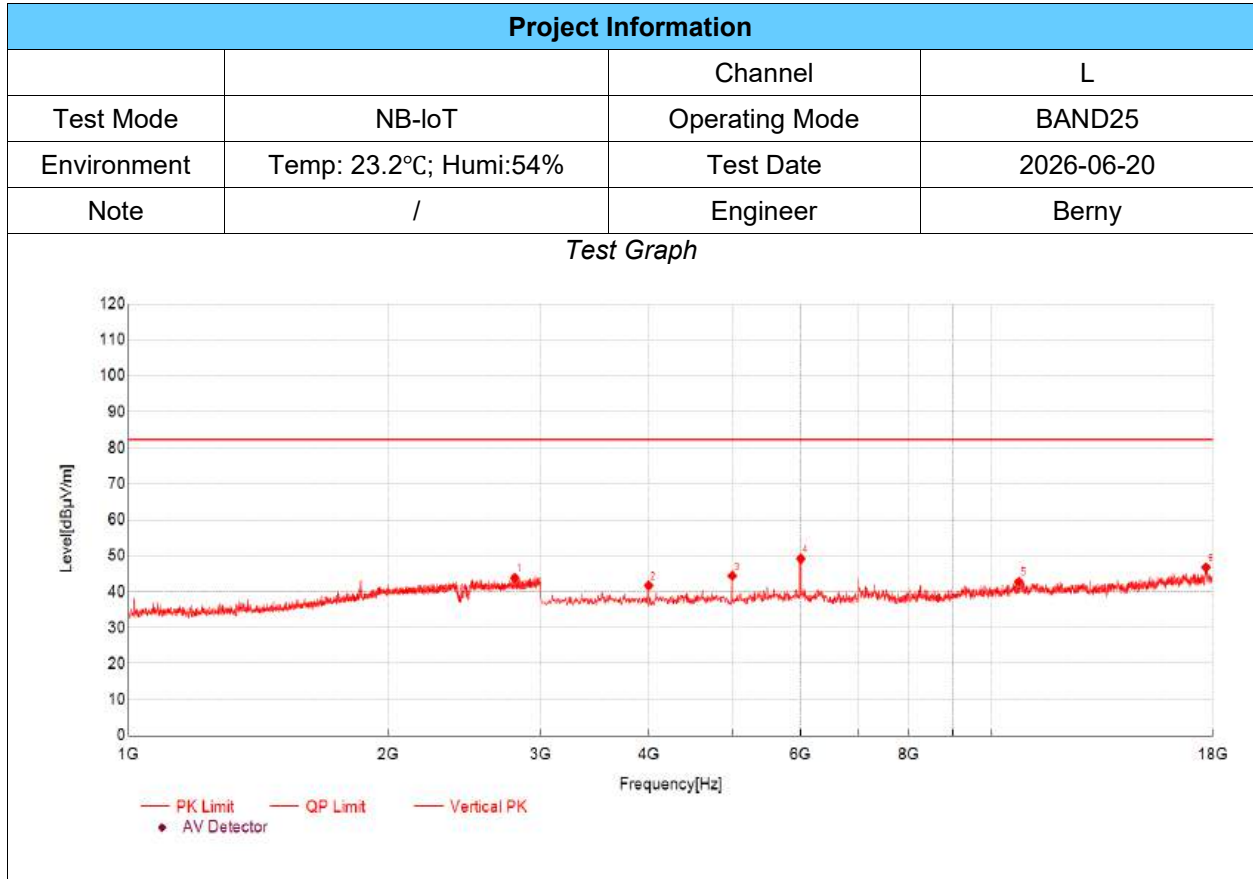

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2799.93         | 52.21          | 43.81          | -8.40         | 82.30          | 38.49       | PK  | Vertical | PASS    |
| 2                   | 4000.33         | 55.08          | 41.73          | -13.35        | 82.30          | 40.57       | PK  | Vertical | PASS    |
| 3                   | 5000.67         | 55.60          | 44.42          | -11.18        | 82.30          | 37.88       | PK  | Vertical | PASS    |
| 4                   | 6001.00         | 58.03          | 49.17          | -8.86         | 82.30          | 33.13       | PK  | Vertical | PASS    |
| 5                   | 10737.58        | 47.91          | 42.77          | -5.14         | 82.30          | 39.53       | PK  | Vertical | PASS    |
| 6                   | 17674.89        | 46.46          | 46.78          | 0.32          | 82.30          | 35.52       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m


# TX Radiated Test Result

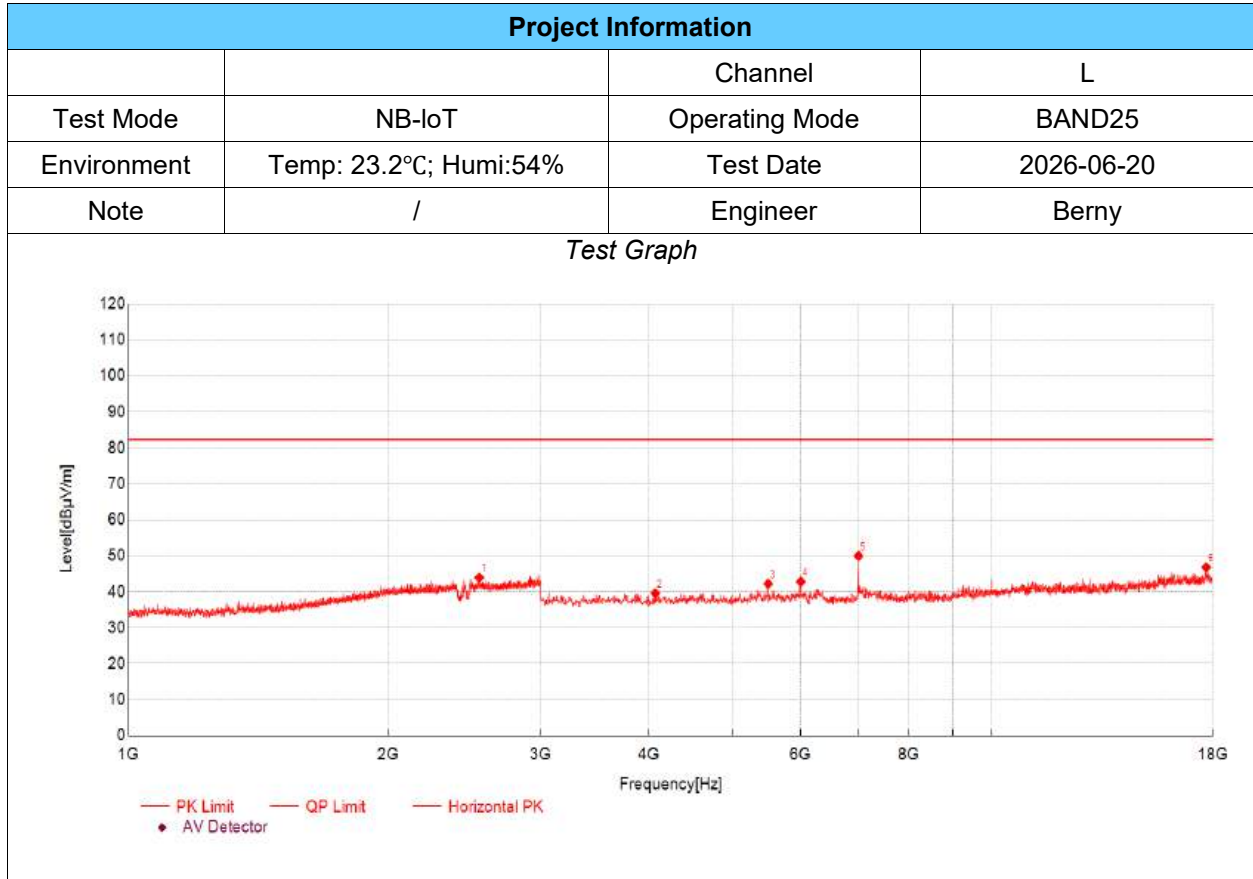

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2547.18         | 52.15          | 43.91          | -8.24         | 82.30          | 38.39       | PK  | Horizontal | PASS    |
| 2                   | 4070.36         | 52.39          | 39.55          | -12.84        | 82.30          | 42.75       | PK  | Horizontal | PASS    |
| 3                   | 5500.83         | 51.87          | 42.19          | -9.68         | 82.30          | 40.11       | PK  | Horizontal | PASS    |
| 4                   | 6001.00         | 51.64          | 42.78          | -8.86         | 82.30          | 39.52       | PK  | Horizontal | PASS    |
| 5                   | 7001.33         | 57.78          | 49.97          | -7.81         | 82.30          | 32.33       | PK  | Horizontal | PASS    |
| 6                   | 17684.89        | 46.52          | 46.78          | 0.26          | 82.30          | 35.52       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

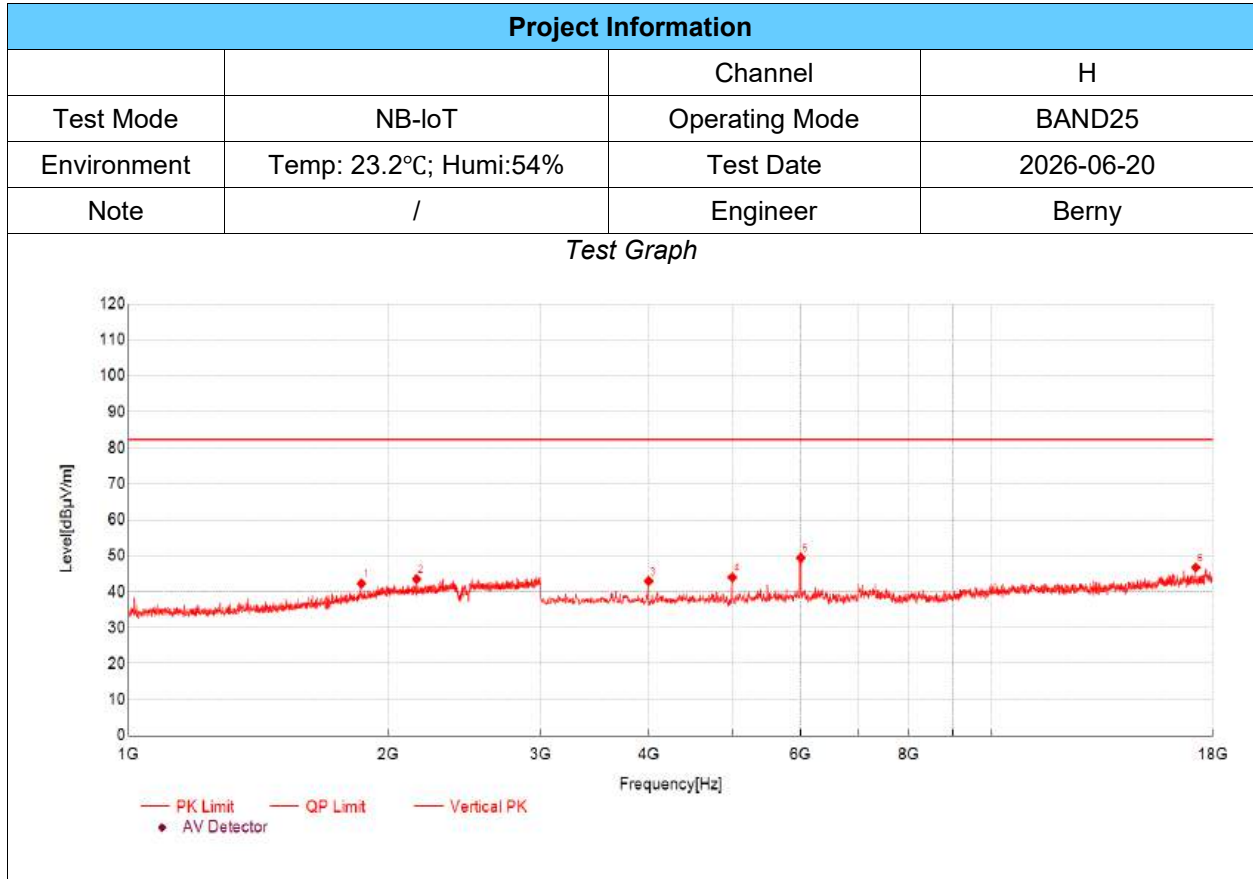


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1859.62         | 52.68          | 42.25          | -10.43        | 82.30          | 40.05       | PK  | Vertical | PASS    |
| 2                   | 2154.38         | 52.58          | 43.54          | -9.04         | 82.30          | 38.76       | PK  | Vertical | PASS    |
| 3                   | 4000.33         | 56.31          | 42.96          | -13.35        | 82.30          | 39.34       | PK  | Vertical | PASS    |
| 4                   | 5000.67         | 55.16          | 43.98          | -11.18        | 82.30          | 38.32       | PK  | Vertical | PASS    |
| 5                   | 6001.00         | 58.26          | 49.40          | -8.86         | 82.30          | 32.90       | PK  | Vertical | PASS    |
| 6                   | 17199.73        | 47.79          | 46.74          | -1.05         | 82.30          | 35.56       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


# TX Radiated Test Result

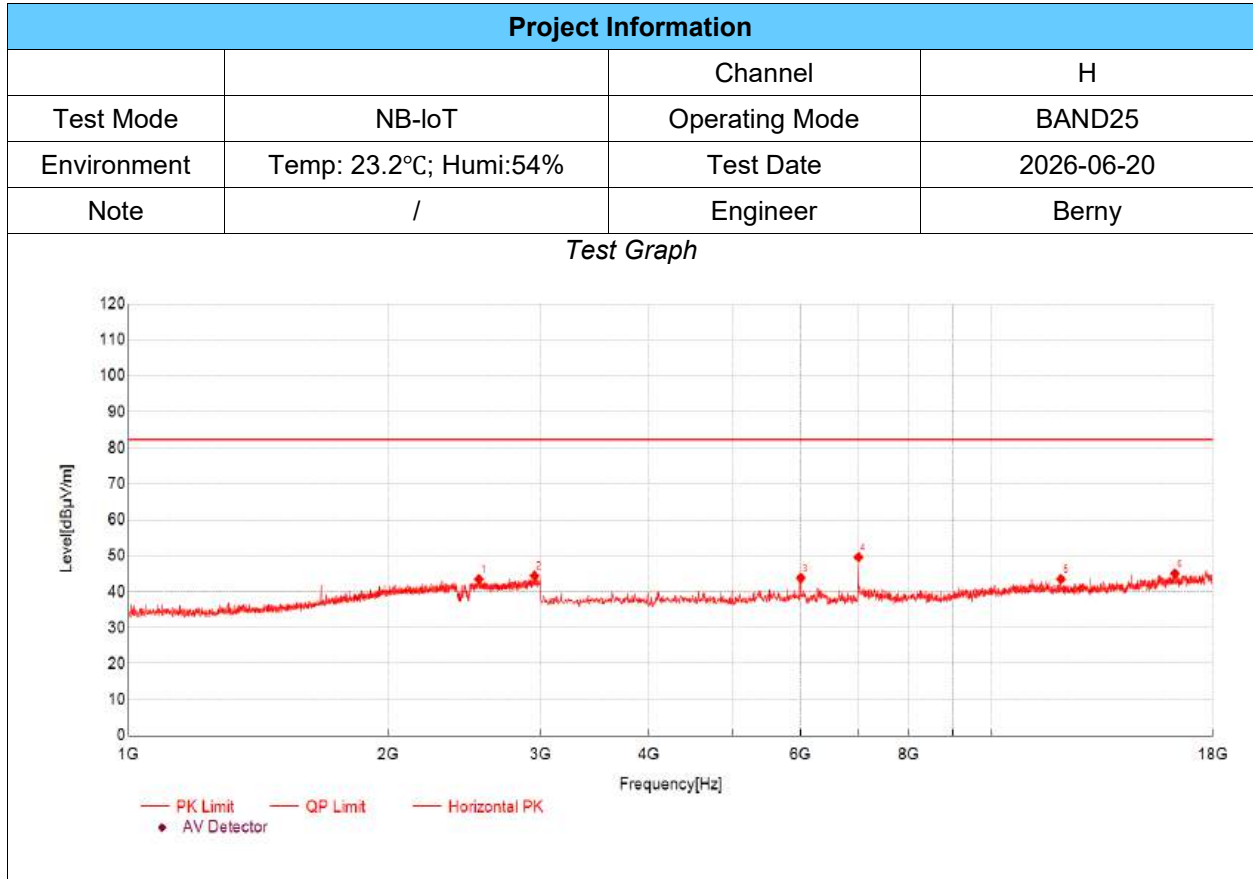

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2544.51         | 51.82          | 43.51          | -8.31         | 82.30          | 38.79       | PK  | Horizontal | PASS    |
| 2                   | 2951.32         | 51.86          | 44.44          | -7.42         | 82.30          | 37.86       | PK  | Horizontal | PASS    |
| 3                   | 6001.00         | 52.71          | 43.85          | -8.86         | 82.30          | 38.45       | PK  | Horizontal | PASS    |
| 4                   | 7001.33         | 57.41          | 49.60          | -7.81         | 82.30          | 32.70       | PK  | Horizontal | PASS    |
| 5                   | 12003.00        | 47.97          | 43.53          | -4.44         | 82.30          | 38.77       | PK  | Horizontal | PASS    |
| 6                   | 16269.42        | 46.14          | 45.03          | -1.11         | 82.30          | 37.27       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

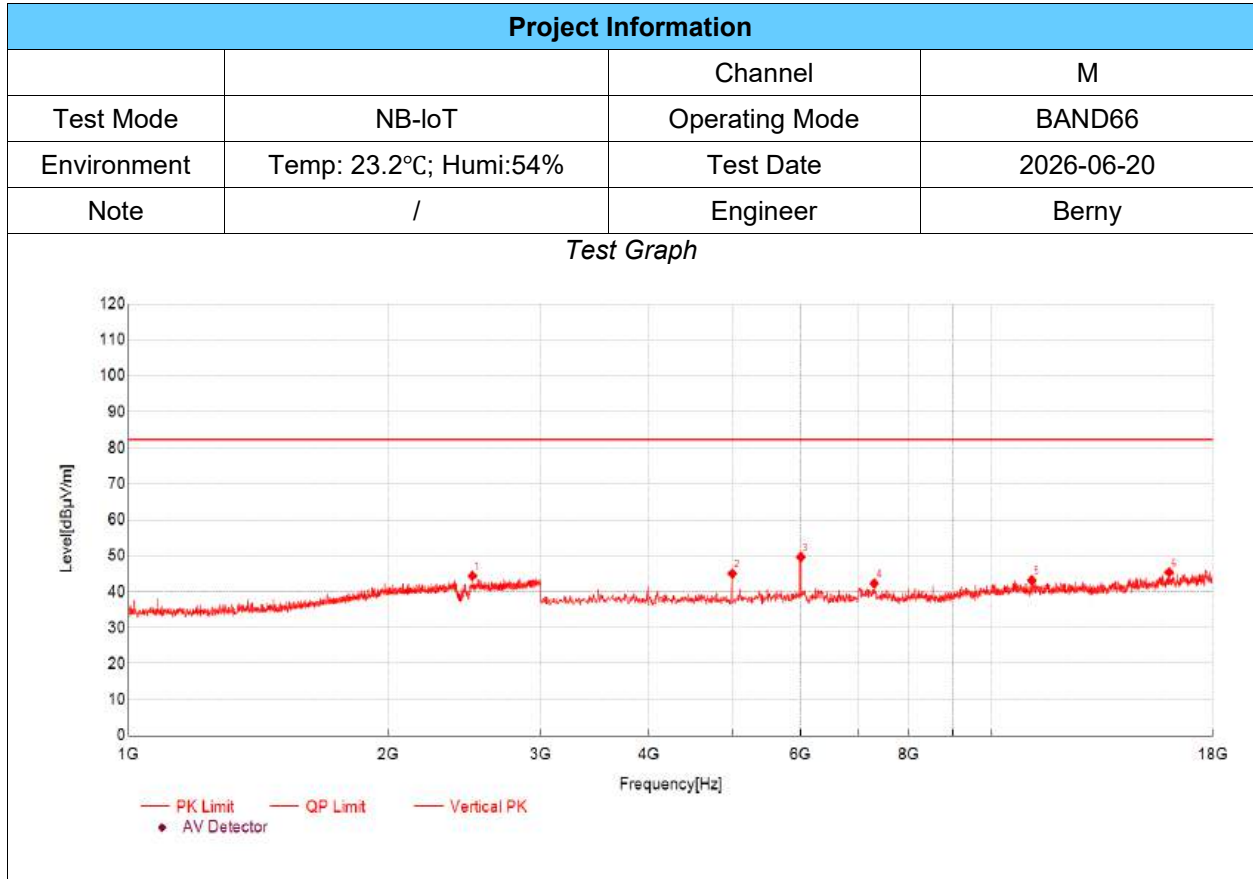


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2500.50         | 52.81          | 44.40          | -8.41         | 82.30          | 37.90       | PK  | Vertical | PASS    |
| 2                   | 5000.67         | 56.20          | 45.02          | -11.18        | 82.30          | 37.28       | PK  | Vertical | PASS    |
| 3                   | 6001.00         | 58.51          | 49.65          | -8.86         | 82.30          | 32.65       | PK  | Vertical | PASS    |
| 4                   | 7301.43         | 49.93          | 42.29          | -7.64         | 82.30          | 40.01       | PK  | Vertical | PASS    |
| 5                   | 11107.70        | 47.60          | 43.19          | -4.41         | 82.30          | 39.11       | PK  | Vertical | PASS    |
| 6                   | 16024.34        | 47.41          | 45.38          | -2.03         | 82.30          | 36.92       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


# TX Radiated Test Result

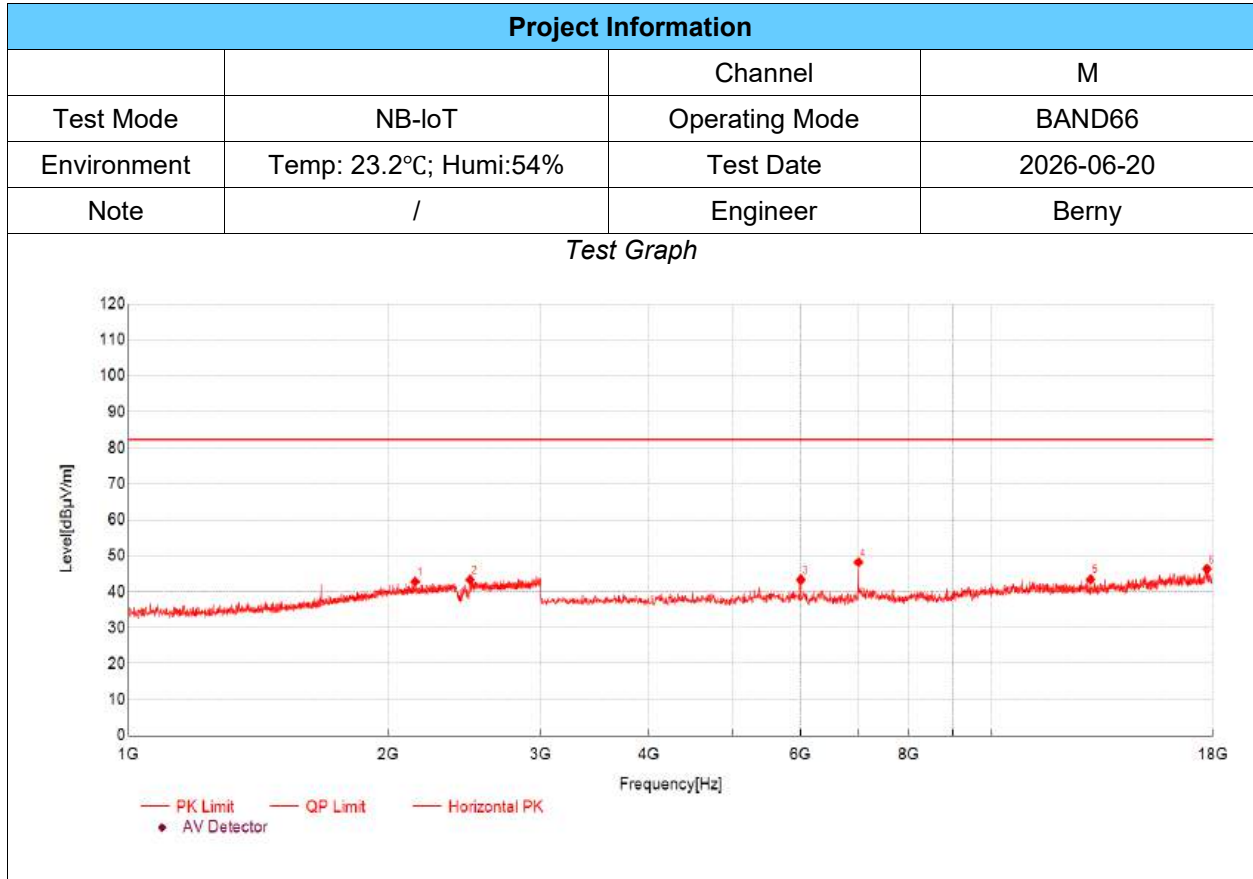

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2146.38         | 51.85          | 42.81          | -9.04         | 82.30          | 39.49       | PK  | Horizontal | PASS    |
| 2                   | 2485.83         | 51.78          | 43.35          | -8.43         | 82.30          | 38.95       | PK  | Horizontal | PASS    |
| 3                   | 6001.00         | 52.23          | 43.37          | -8.86         | 82.30          | 38.93       | PK  | Horizontal | PASS    |
| 4                   | 7001.33         | 56.00          | 48.19          | -7.81         | 82.30          | 34.11       | PK  | Horizontal | PASS    |
| 5                   | 12998.33        | 48.00          | 43.46          | -4.54         | 82.30          | 38.84       | PK  | Horizontal | PASS    |
| 6                   | 17719.91        | 46.56          | 46.31          | -0.25         | 82.30          | 35.99       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

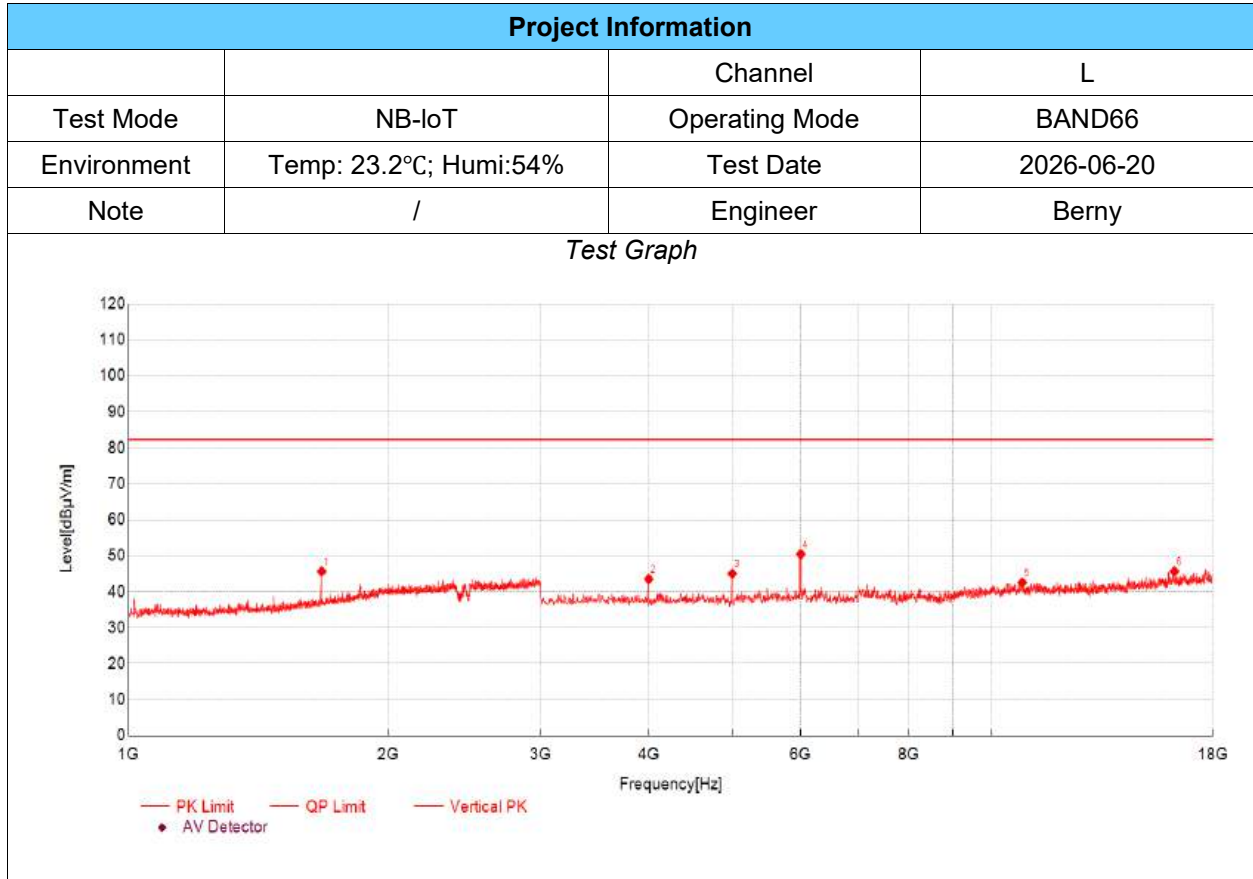


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1672.89         | 57.78          | 45.61          | -12.17        | 82.30          | 36.69       | PK  | Vertical | PASS    |
| 2                   | 4000.33         | 56.89          | 43.54          | -13.35        | 82.30          | 38.76       | PK  | Vertical | PASS    |
| 3                   | 5000.67         | 56.18          | 45.00          | -11.18        | 82.30          | 37.30       | PK  | Vertical | PASS    |
| 4                   | 6001.00         | 59.30          | 50.44          | -8.86         | 82.30          | 31.86       | PK  | Vertical | PASS    |
| 5                   | 10827.61        | 47.69          | 42.57          | -5.12         | 82.30          | 39.73       | PK  | Vertical | PASS    |
| 6                   | 16249.42        | 46.21          | 45.65          | -0.56         | 82.30          | 36.65       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

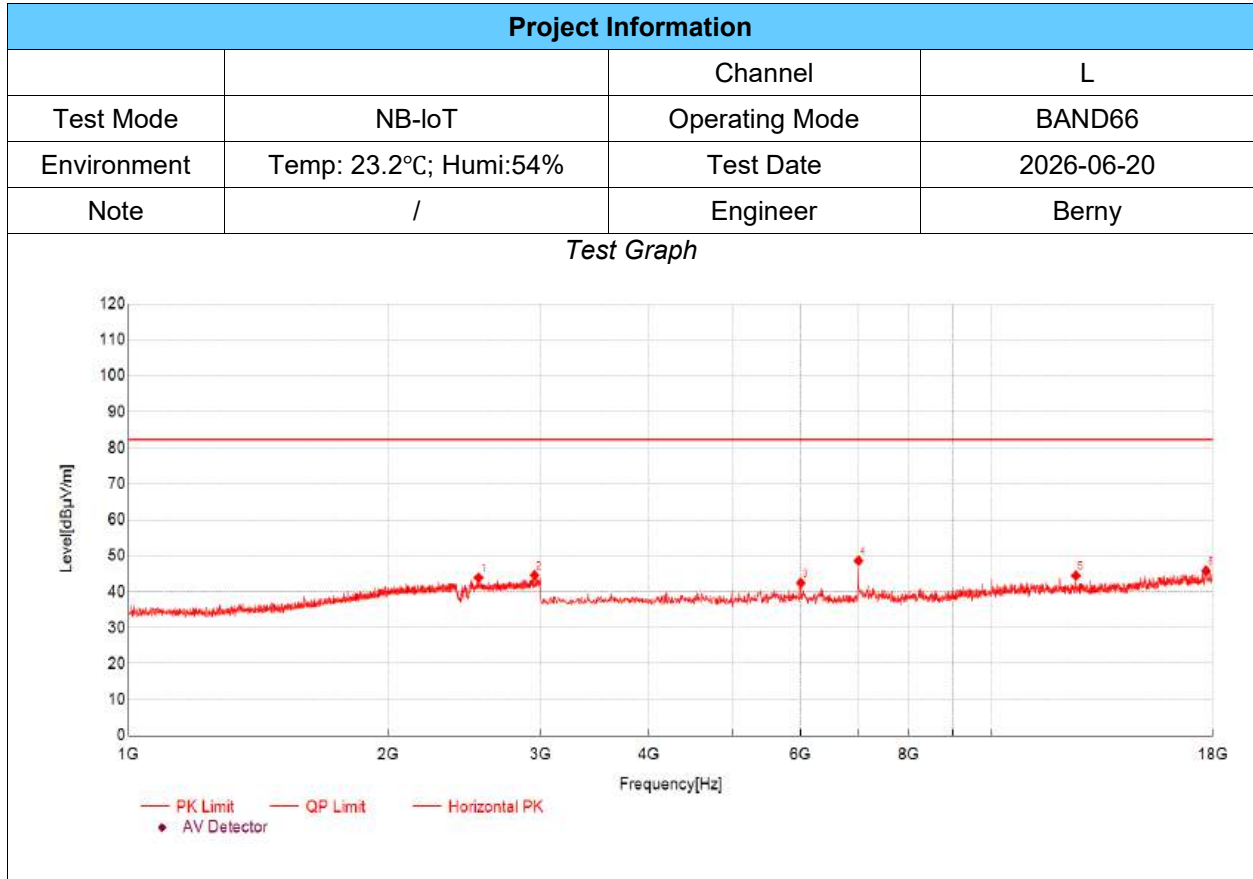

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2542.51         | 52.26          | 43.90          | -8.36         | 82.30          | 38.40       | PK  | Horizontal | PASS    |
| 2                   | 2951.32         | 52.05          | 44.63          | -7.42         | 82.30          | 37.67       | PK  | Horizontal | PASS    |
| 3                   | 6001.00         | 51.30          | 42.44          | -8.86         | 82.30          | 39.86       | PK  | Horizontal | PASS    |
| 4                   | 7001.33         | 56.44          | 48.63          | -7.81         | 82.30          | 33.67       | PK  | Horizontal | PASS    |
| 5                   | 12498.17        | 48.85          | 44.50          | -4.35         | 82.30          | 37.80       | PK  | Horizontal | PASS    |
| 6                   | 17674.89        | 45.45          | 45.77          | 0.32          | 82.30          | 36.53       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

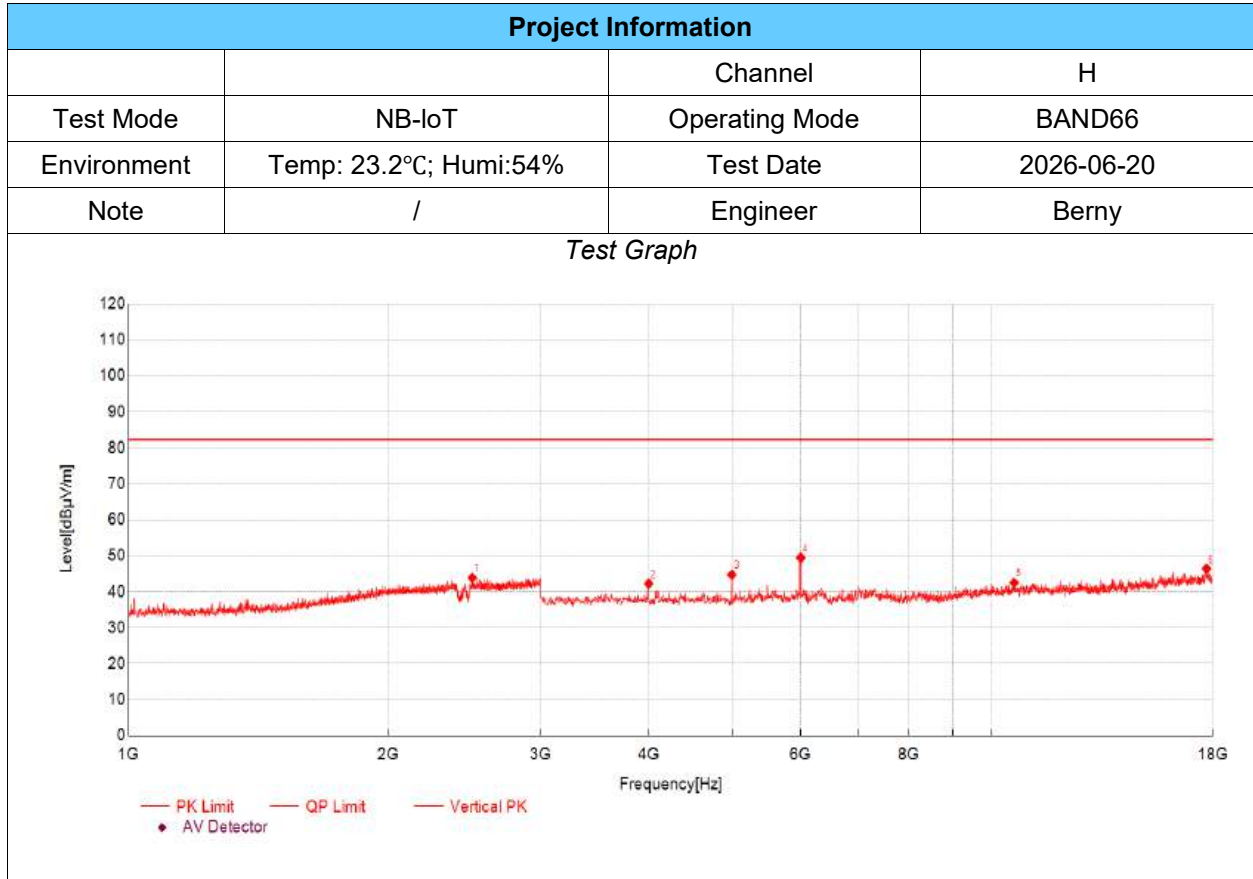

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2499.83         | 52.28          | 43.87          | -8.41         | 82.30          | 38.43       | PK  | Vertical | PASS    |
| 2                   | 4000.33         | 55.59          | 42.24          | -13.35        | 82.30          | 40.06       | PK  | Vertical | PASS    |
| 3                   | 4995.67         | 55.92          | 44.74          | -11.18        | 82.30          | 37.56       | PK  | Vertical | PASS    |
| 4                   | 6001.00         | 58.30          | 49.44          | -8.86         | 82.30          | 32.86       | PK  | Vertical | PASS    |
| 5                   | 10597.53        | 47.75          | 42.49          | -5.26         | 82.30          | 39.81       | PK  | Vertical | PASS    |
| 6                   | 17699.90        | 46.20          | 46.37          | 0.17          | 82.30          | 35.93       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

Undesirable radiated Spurious Emission below 1GHz (30MHz to 1GHz)

All modes have been tested and the worst result as bellow:

## TX Radiated Test Result

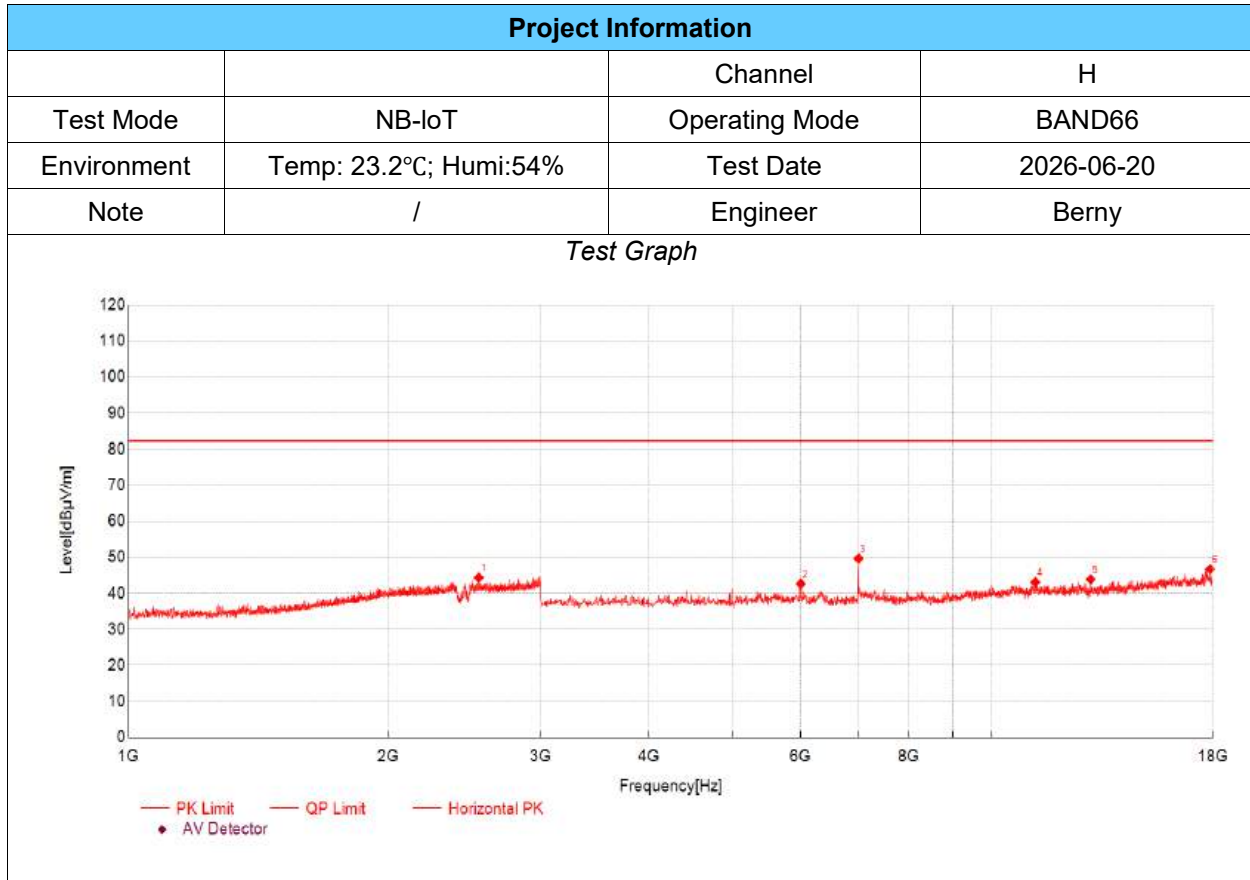


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2543.85         | 52.69          | 44.36          | -8.33         | 82.30          | 37.94       | PK  | Horizontal | PASS    |
| 2                   | 6001.00         | 51.51          | 42.65          | -8.86         | 82.30          | 39.65       | PK  | Horizontal | PASS    |
| 3                   | 7001.33         | 57.46          | 49.65          | -7.81         | 82.30          | 32.65       | PK  | Horizontal | PASS    |
| 4                   | 11217.74        | 47.29          | 43.11          | -4.18         | 82.30          | 39.19       | PK  | Horizontal | PASS    |
| 5                   | 12998.33        | 48.40          | 43.86          | -4.54         | 82.30          | 38.44       | PK  | Horizontal | PASS    |
| 6                   | 17874.96        | 46.15          | 46.70          | 0.55          | 82.30          | 35.60       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

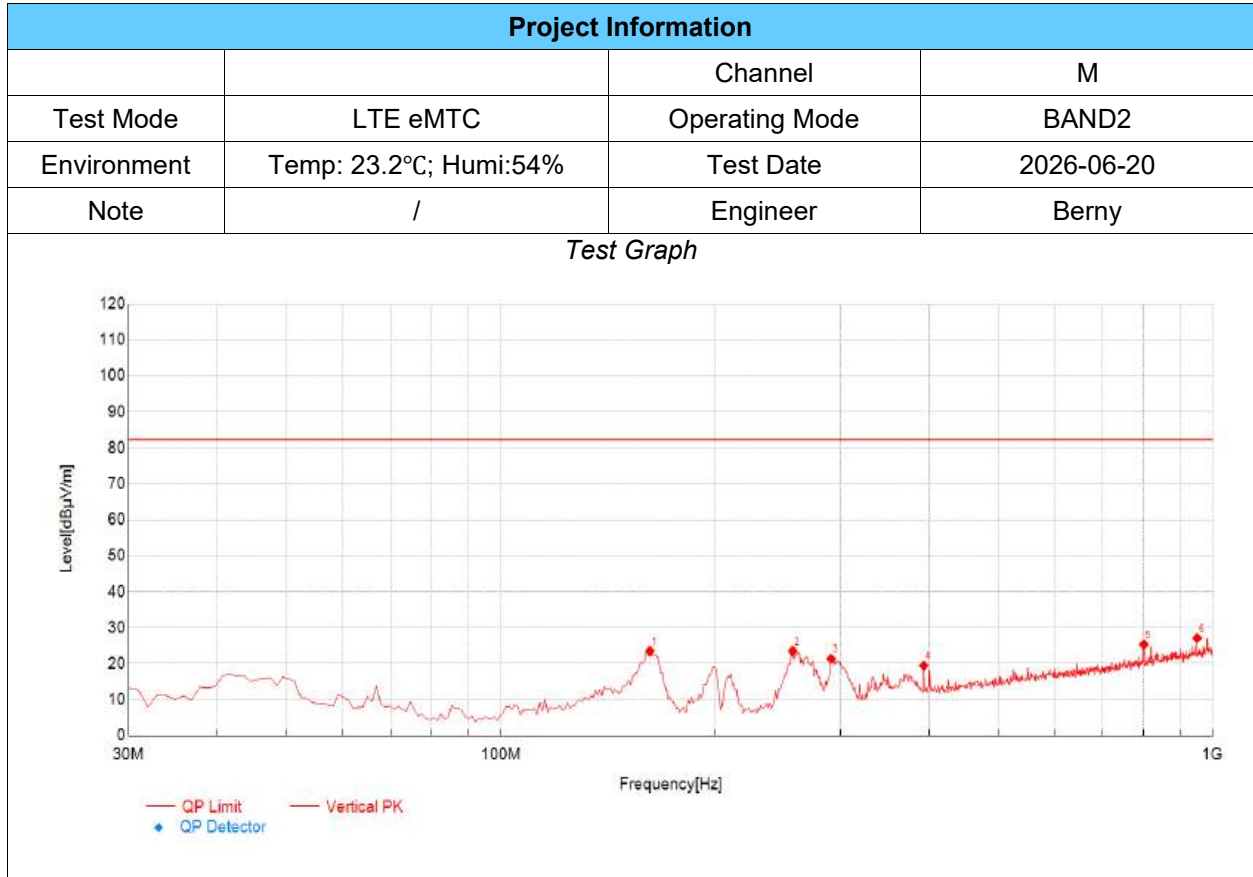

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 161.92          | 41.84          | 23.48          | -18.36        | 82.30          | 58.82       | PK  | Vertical | PASS    |
| 2                   | 256.98          | 43.63          | 23.49          | -20.14        | 82.30          | 58.81       | PK  | Vertical | PASS    |
| 3                   | 290.93          | 40.46          | 21.37          | -19.09        | 82.30          | 60.93       | PK  | Vertical | PASS    |
| 4                   | 392.78          | 35.26          | 19.44          | -15.82        | 82.30          | 62.86       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 32.60          | 25.34          | -7.26         | 82.30          | 56.96       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 31.43          | 27.11          | -4.32         | 82.30          | 55.19       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | M          |
| Test Mode           | LTE eMTC               | Operating Mode | BAND2      |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

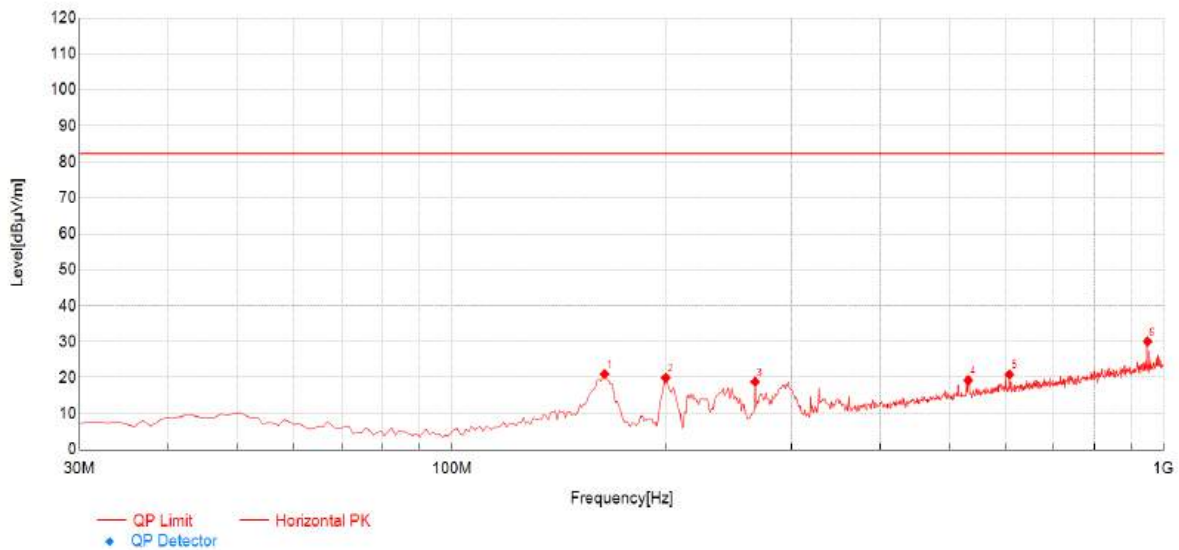


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 163.86          | 39.63          | 21.02          | -18.61        | 82.30          | 61.28       | PK  | Horizontal | PASS    |
| 2                   | 199.75          | 42.30          | 19.98          | -22.32        | 82.30          | 62.32       | PK  | Horizontal | PASS    |
| 3                   | 266.68          | 38.71          | 18.85          | -19.86        | 82.30          | 63.45       | PK  | Horizontal | PASS    |
| 4                   | 531.49          | 31.69          | 19.25          | -12.44        | 82.30          | 63.05       | PK  | Horizontal | PASS    |
| 5                   | 607.15          | 31.53          | 20.88          | -10.65        | 82.30          | 61.42       | PK  | Horizontal | PASS    |
| 6                   | 948.59          | 34.34          | 30.04          | -4.30         | 82.30          | 52.26       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

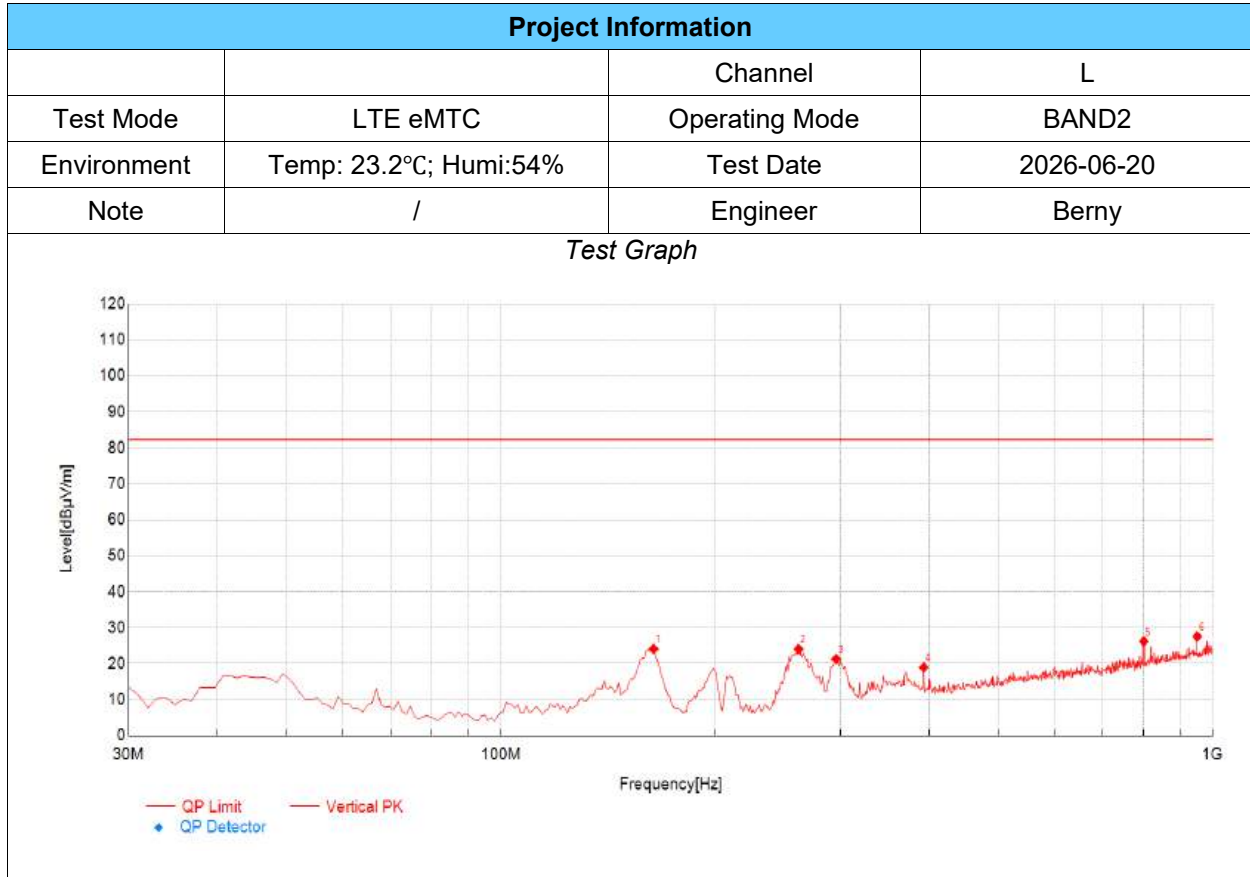

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 163.86          | 42.72          | 24.11          | -18.61        | 82.30          | 58.19       | PK  | Vertical | PASS    |
| 2                   | 261.83          | 44.10          | 24.05          | -20.05        | 82.30          | 58.25       | PK  | Vertical | PASS    |
| 3                   | 295.78          | 40.25          | 21.34          | -18.91        | 82.30          | 60.96       | PK  | Vertical | PASS    |
| 4                   | 392.78          | 34.79          | 18.97          | -15.82        | 82.30          | 63.33       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 33.47          | 26.21          | -7.26         | 82.30          | 56.09       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 31.91          | 27.59          | -4.32         | 82.30          | 54.71       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | L          |
| Test Mode           | LTE eMTC               | Operating Mode | BAND2      |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

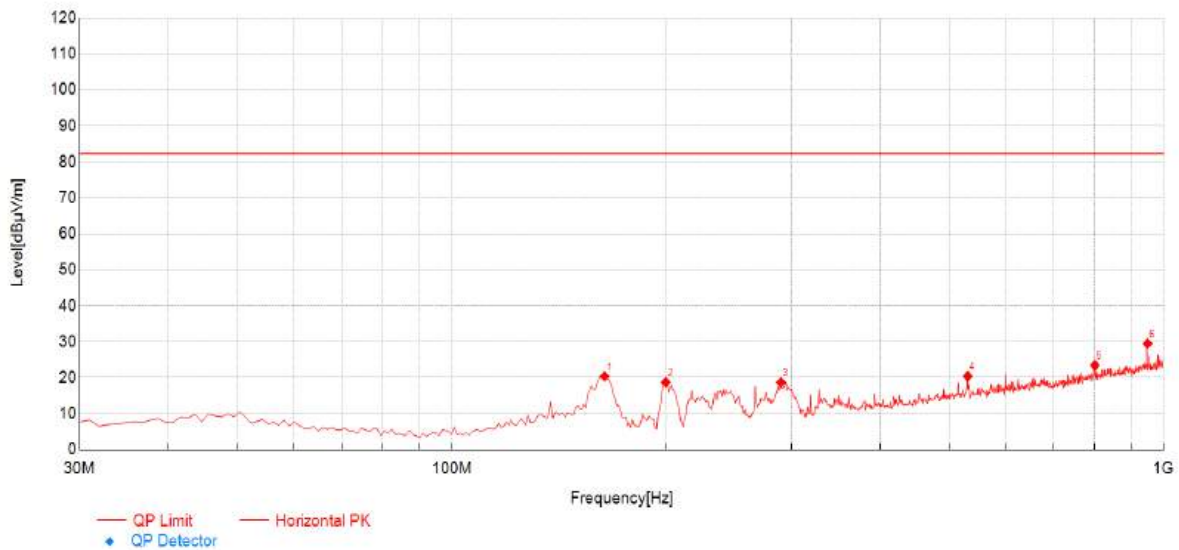


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 163.86          | 39.00          | 20.39          | -18.61        | 82.30          | 61.91       | PK  | Horizontal | PASS    |
| 2                   | 199.75          | 41.05          | 18.73          | -22.32        | 82.30          | 63.57       | PK  | Horizontal | PASS    |
| 3                   | 289.96          | 37.86          | 18.70          | -19.16        | 82.30          | 63.60       | PK  | Horizontal | PASS    |
| 4                   | 530.52          | 32.90          | 20.43          | -12.47        | 82.30          | 61.87       | PK  | Horizontal | PASS    |
| 5                   | 800.18          | 30.69          | 23.43          | -7.26         | 82.30          | 58.87       | PK  | Horizontal | PASS    |
| 6                   | 948.59          | 33.77          | 29.47          | -4.30         | 82.30          | 52.83       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

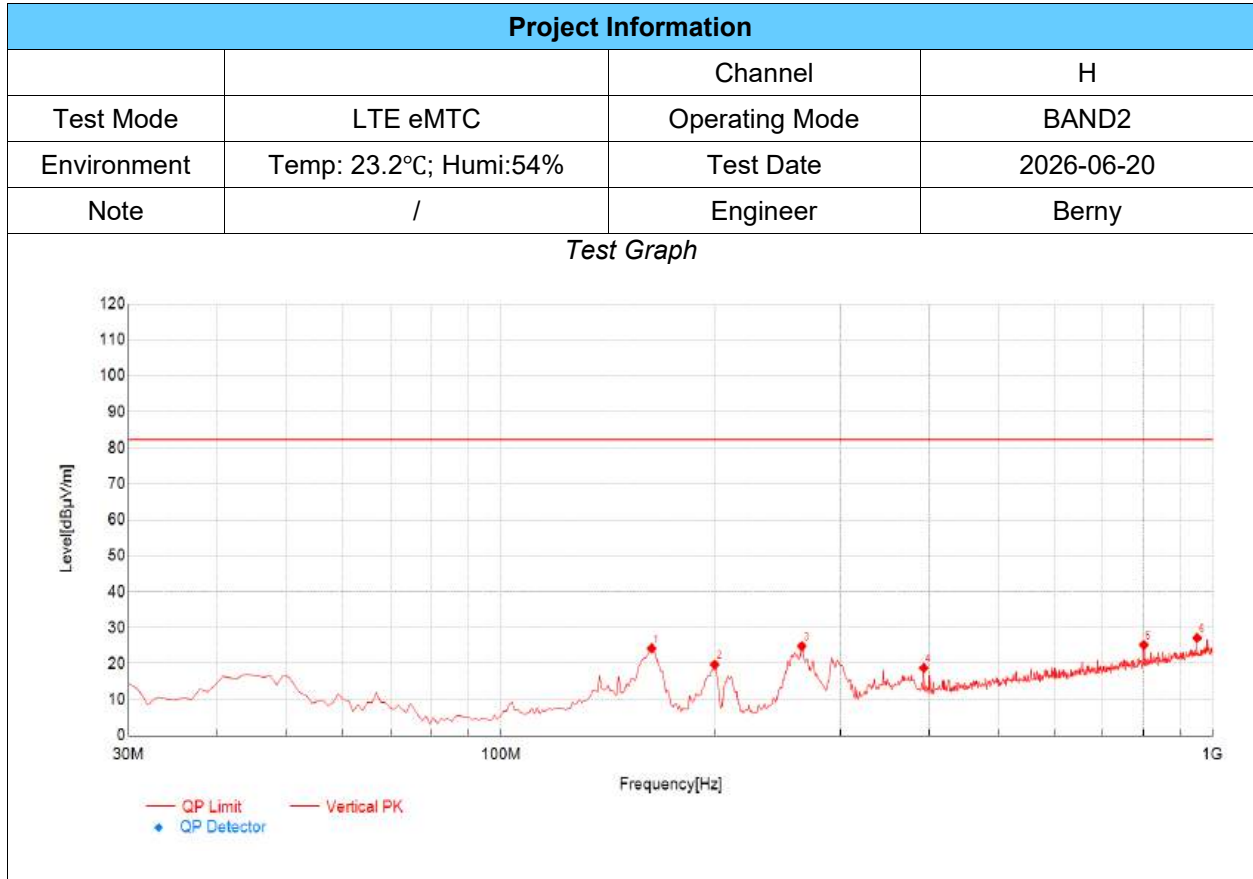

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 162.89          | 42.72          | 24.24          | -18.48        | 82.30          | 58.06       | PK  | Vertical | PASS    |
| 2                   | 199.75          | 42.04          | 19.72          | -22.32        | 82.30          | 62.58       | PK  | Vertical | PASS    |
| 3                   | 264.74          | 44.75          | 24.83          | -19.92        | 82.30          | 57.47       | PK  | Vertical | PASS    |
| 4                   | 392.78          | 34.63          | 18.81          | -15.82        | 82.30          | 63.49       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 32.47          | 25.21          | -7.26         | 82.30          | 57.09       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 31.50          | 27.18          | -4.32         | 82.30          | 55.12       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

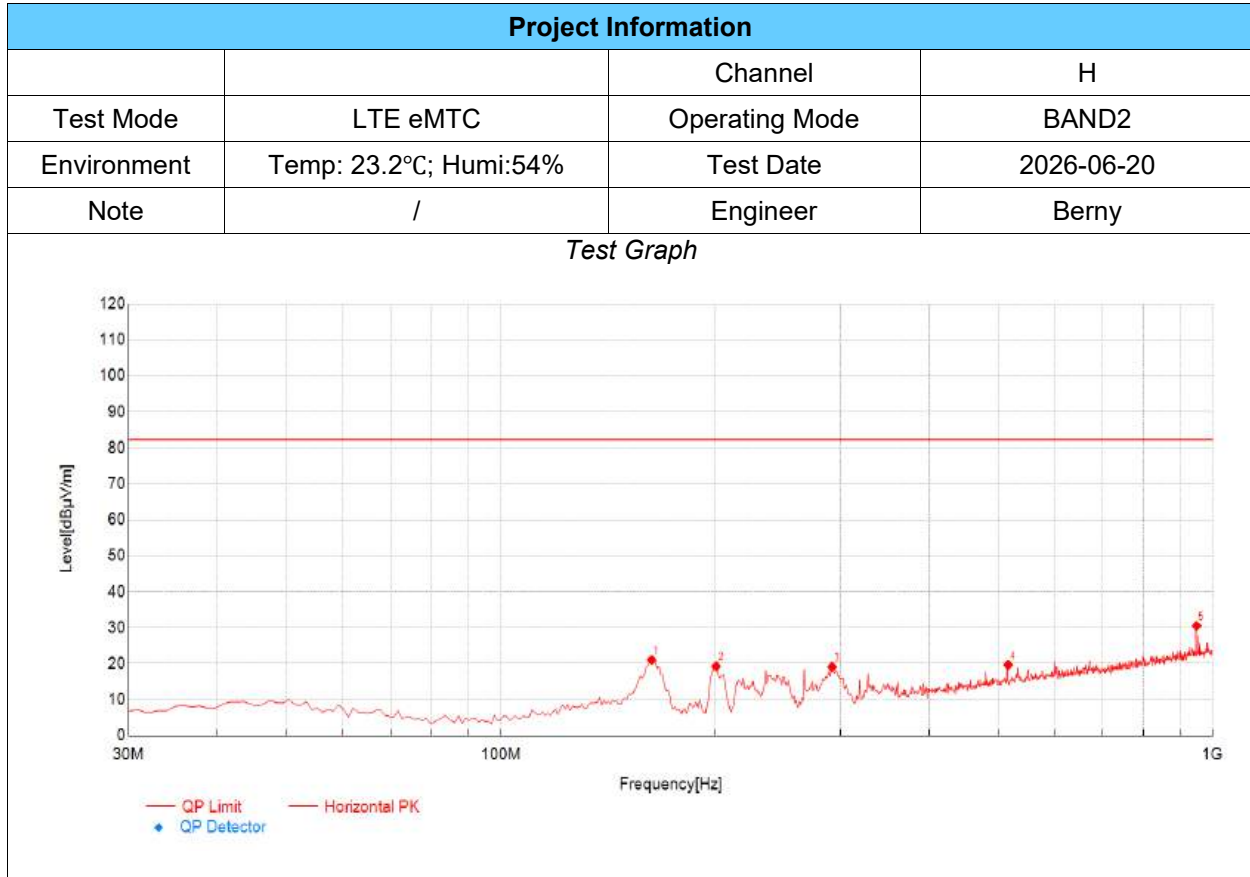


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 162.89          | 39.53          | 21.05          | -18.48        | 82.30          | 61.25       | PK  | Horizontal | PASS    |
| 2                   | 200.72          | 41.62          | 19.26          | -22.36        | 82.30          | 63.04       | PK  | Horizontal | PASS    |
| 3                   | 291.90          | 38.15          | 19.08          | -19.07        | 82.30          | 63.22       | PK  | Horizontal | PASS    |
| 4                   | 515.97          | 32.39          | 19.65          | -12.74        | 82.30          | 62.65       | PK  | Horizontal | PASS    |
| 5                   | 948.59          | 34.78          | 30.48          | -4.30         | 82.30          | 51.82       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

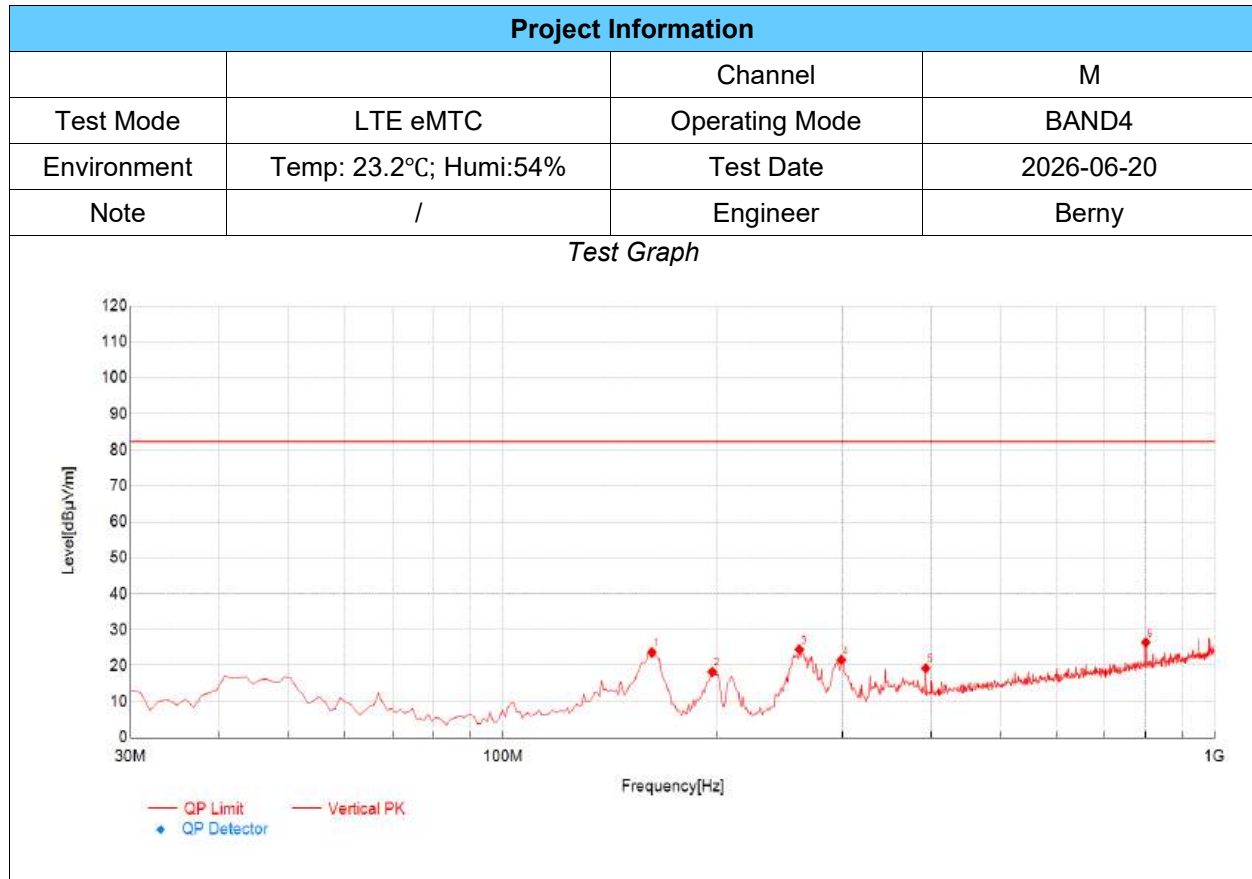


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 161.92          | 42.04          | 23.68          | -18.36        | 82.30          | 58.62       | PK  | Vertical | PASS    |
| 2                   | 196.84          | 40.44          | 18.27          | -22.17        | 82.30          | 64.03       | PK  | Vertical | PASS    |
| 3                   | 260.86          | 44.55          | 24.50          | -20.05        | 82.30          | 57.80       | PK  | Vertical | PASS    |
| 4                   | 298.69          | 40.29          | 21.58          | -18.71        | 82.30          | 60.72       | PK  | Vertical | PASS    |
| 5                   | 392.78          | 35.07          | 19.25          | -15.82        | 82.30          | 63.05       | PK  | Vertical | PASS    |
| 6                   | 800.18          | 33.70          | 26.44          | -7.26         | 82.30          | 55.86       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

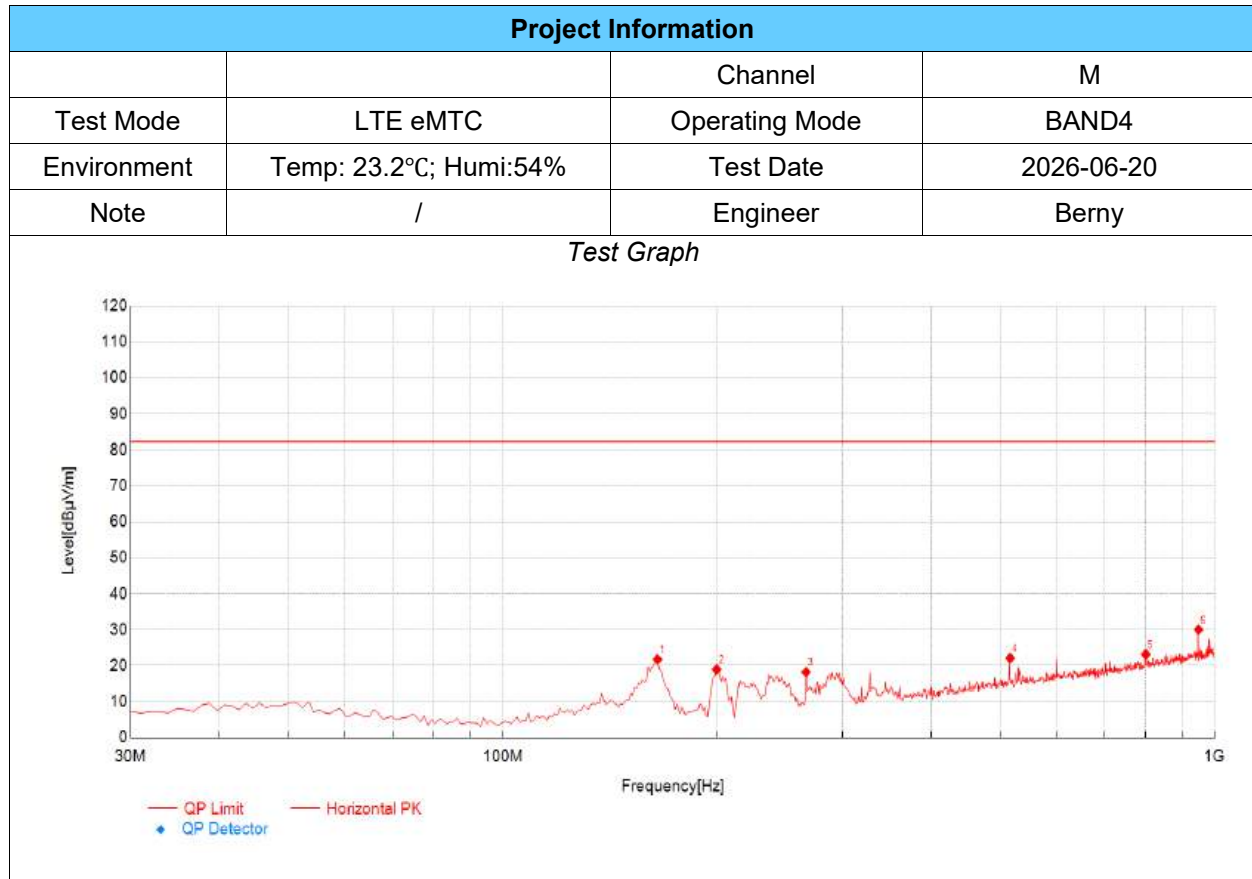


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 164.83          | 40.48          | 21.77          | -18.71        | 82.30          | 60.53       | PK  | Horizontal | PASS    |
| 2                   | 199.75          | 41.27          | 18.95          | -22.32        | 82.30          | 63.35       | PK  | Horizontal | PASS    |
| 3                   | 266.68          | 38.07          | 18.21          | -19.86        | 82.30          | 64.09       | PK  | Horizontal | PASS    |
| 4                   | 515.97          | 34.87          | 22.13          | -12.74        | 82.30          | 60.17       | PK  | Horizontal | PASS    |
| 5                   | 800.18          | 30.41          | 23.15          | -7.26         | 82.30          | 59.15       | PK  | Horizontal | PASS    |
| 6                   | 948.59          | 34.31          | 30.01          | -4.30         | 82.30          | 52.29       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

## TX Radiated Test Result

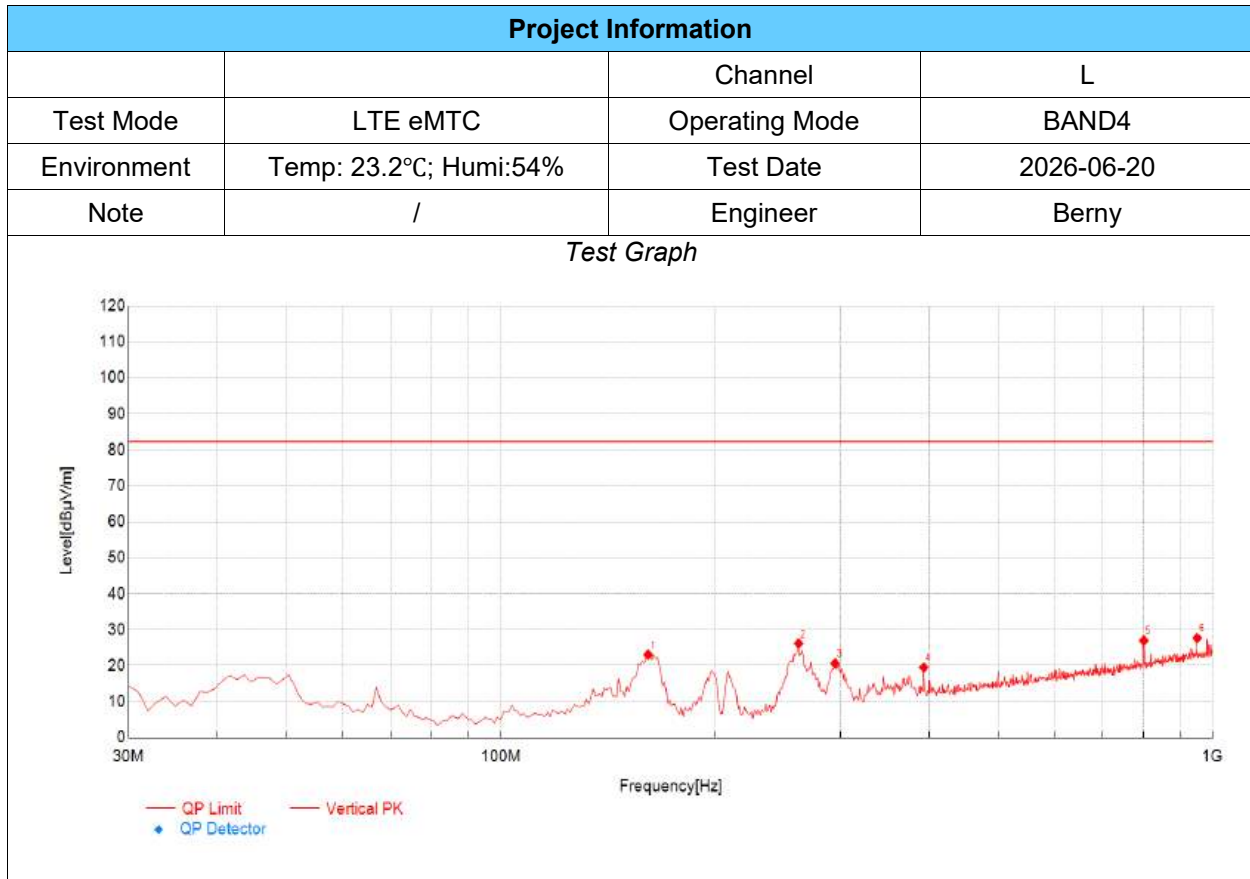


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 160.95          | 41.31          | 23.06          | -18.25        | 82.30          | 59.24       | PK  | Vertical | PASS    |
| 2                   | 261.83          | 46.22          | 26.17          | -20.05        | 82.30          | 56.13       | PK  | Vertical | PASS    |
| 3                   | 294.81          | 39.62          | 20.67          | -18.95        | 82.30          | 61.63       | PK  | Vertical | PASS    |
| 4                   | 392.78          | 35.30          | 19.48          | -15.82        | 82.30          | 62.82       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 34.25          | 26.99          | -7.26         | 82.30          | 55.31       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 32.01          | 27.69          | -4.32         | 82.30          | 54.61       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

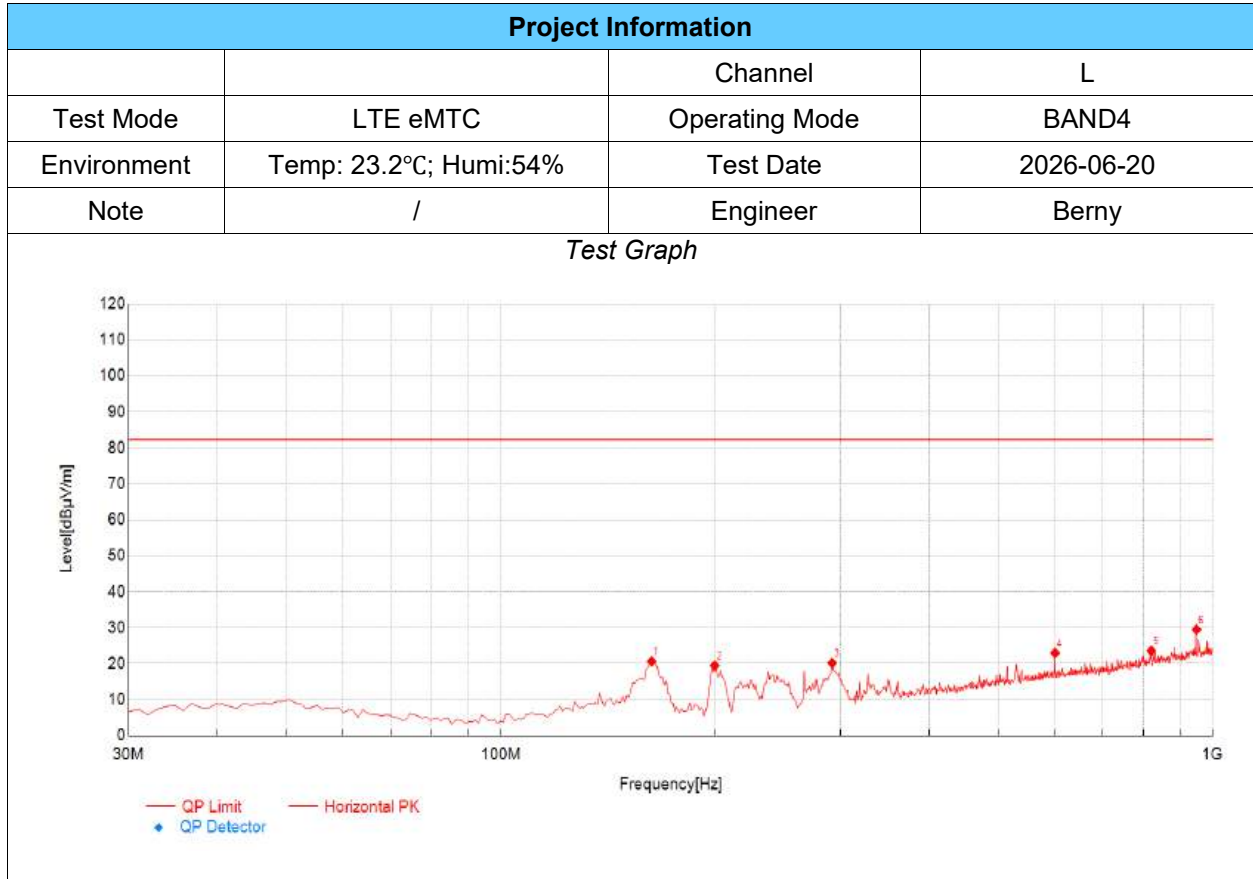

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 162.89          | 39.13          | 20.65          | -18.48        | 82.30          | 61.65       | PK  | Horizontal | PASS    |
| 2                   | 199.75          | 41.76          | 19.44          | -22.32        | 82.30          | 62.86       | PK  | Horizontal | PASS    |
| 3                   | 291.90          | 39.27          | 20.20          | -19.07        | 82.30          | 62.10       | PK  | Horizontal | PASS    |
| 4                   | 600.36          | 33.76          | 22.97          | -10.79        | 82.30          | 59.33       | PK  | Horizontal | PASS    |
| 5                   | 819.58          | 30.48          | 23.57          | -6.91         | 82.30          | 58.73       | PK  | Horizontal | PASS    |
| 6                   | 948.59          | 33.79          | 29.49          | -4.30         | 82.30          | 52.81       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

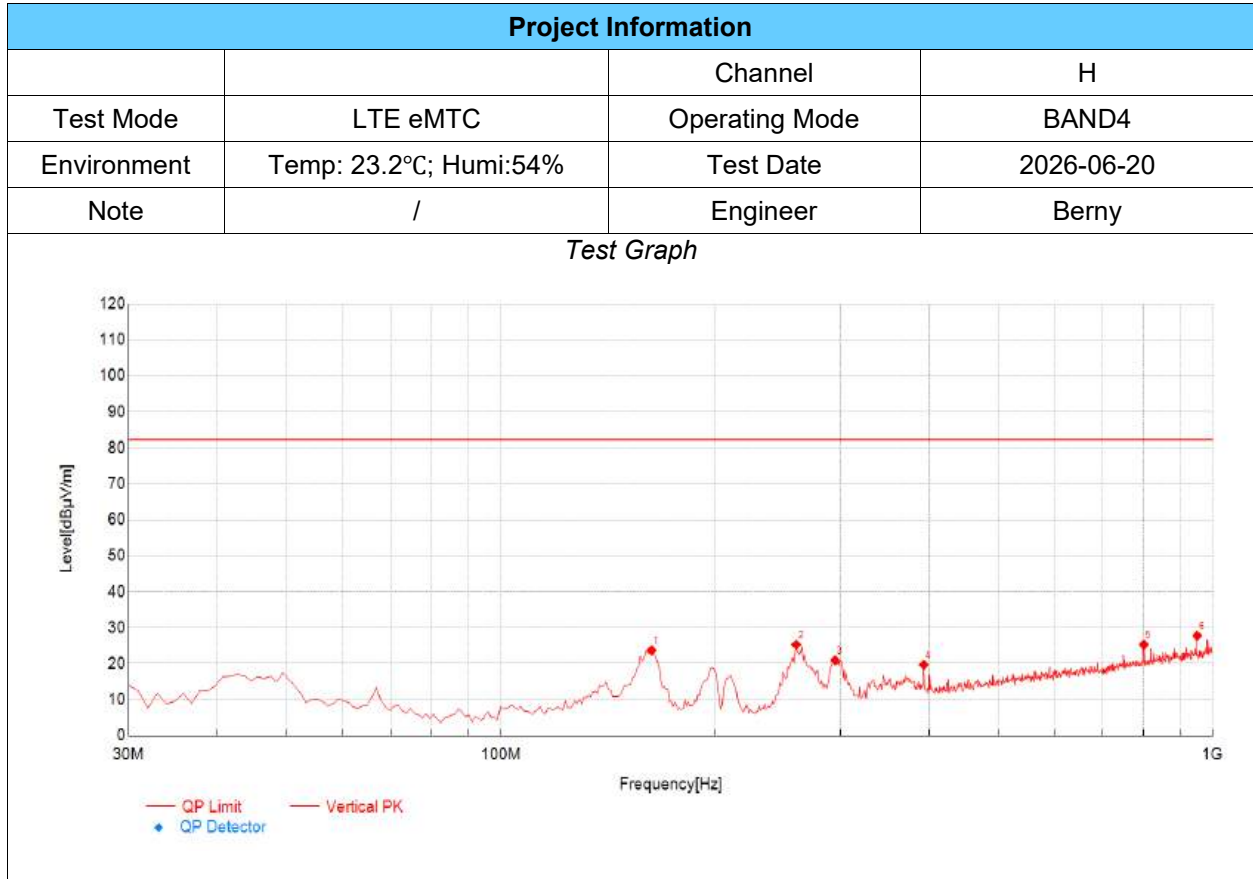

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 162.89          | 42.19          | 23.71          | -18.48        | 82.30          | 58.59       | PK  | Vertical | PASS    |
| 2                   | 259.89          | 45.32          | 25.26          | -20.06        | 82.30          | 57.04       | PK  | Vertical | PASS    |
| 3                   | 294.81          | 39.90          | 20.95          | -18.95        | 82.30          | 61.35       | PK  | Vertical | PASS    |
| 4                   | 392.78          | 35.52          | 19.70          | -15.82        | 82.30          | 62.60       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 32.56          | 25.30          | -7.26         | 82.30          | 57.00       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 32.10          | 27.78          | -4.32         | 82.30          | 54.52       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

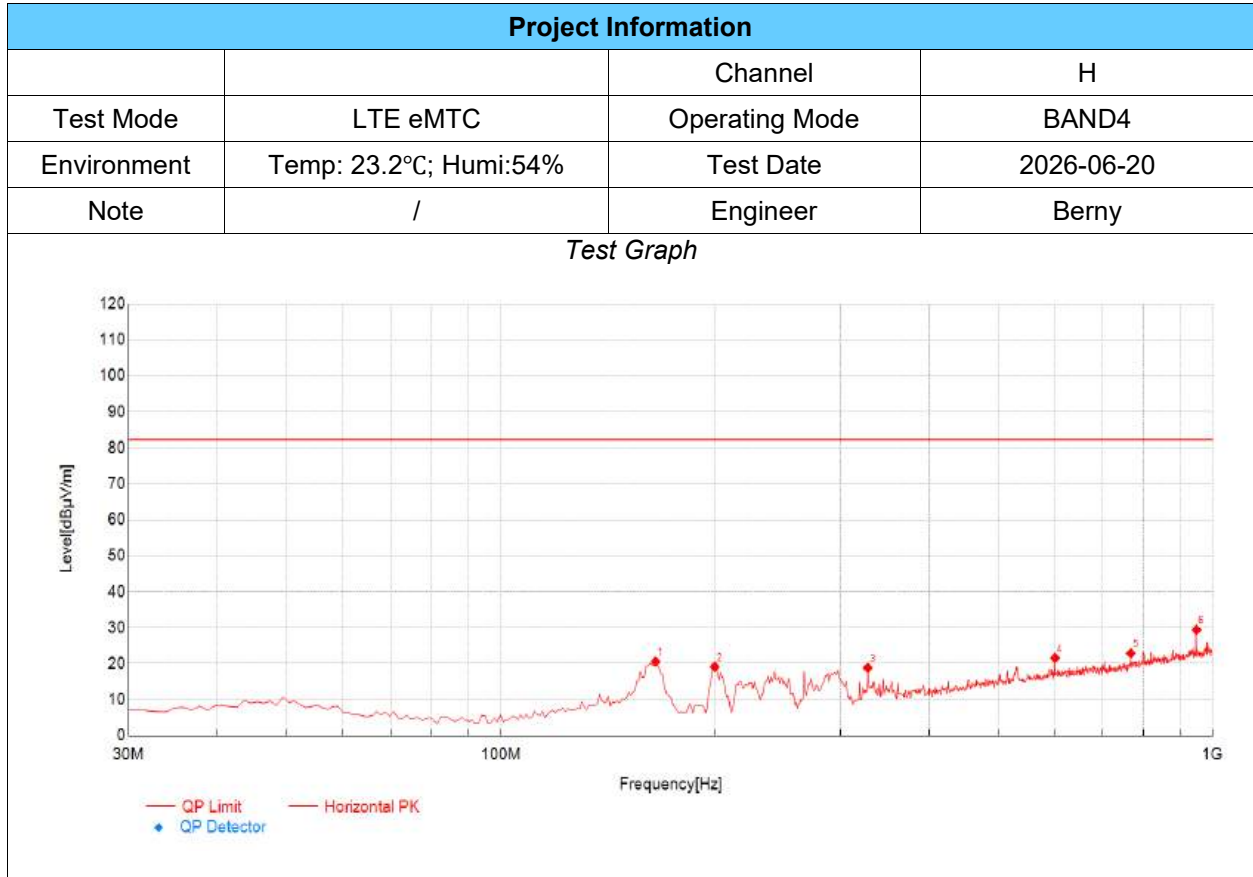


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 164.83          | 39.31          | 20.60          | -18.71        | 82.30          | 61.70       | PK  | Horizontal | PASS    |
| 2                   | 199.75          | 41.44          | 19.12          | -22.32        | 82.30          | 63.18       | PK  | Horizontal | PASS    |
| 3                   | 327.79          | 36.55          | 18.83          | -17.72        | 82.30          | 63.47       | PK  | Horizontal | PASS    |
| 4                   | 600.36          | 32.39          | 21.60          | -10.79        | 82.30          | 60.70       | PK  | Horizontal | PASS    |
| 5                   | 767.20          | 30.91          | 22.89          | -8.02         | 82.30          | 59.41       | PK  | Horizontal | PASS    |
| 6                   | 948.59          | 33.70          | 29.40          | -4.30         | 82.30          | 52.90       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

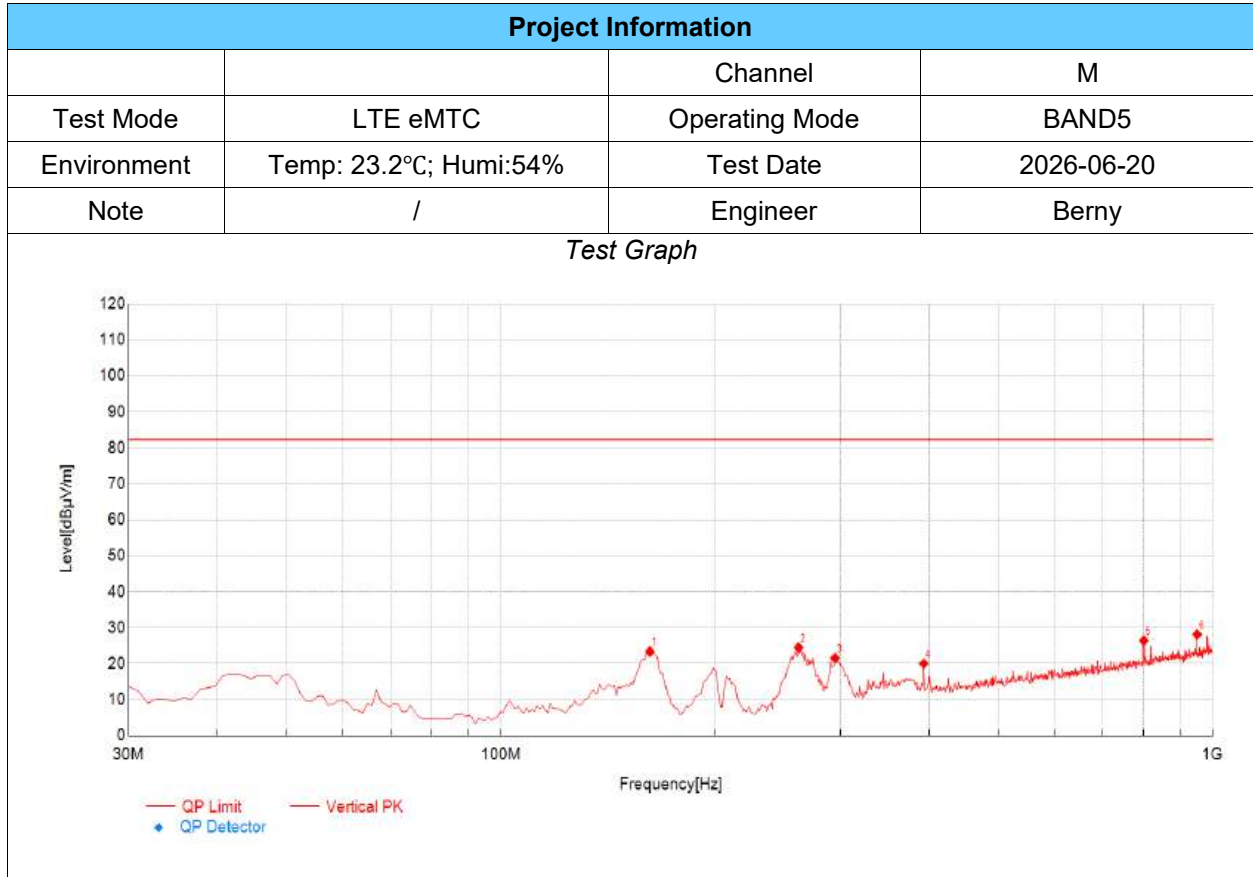


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 161.92          | 41.74          | 23.38          | -18.36        | 82.30          | 58.92       | PK  | Vertical | PASS    |
| 2                   | 261.83          | 44.53          | 24.48          | -20.05        | 82.30          | 57.82       | PK  | Vertical | PASS    |
| 3                   | 294.81          | 40.53          | 21.58          | -18.95        | 82.30          | 60.72       | PK  | Vertical | PASS    |
| 4                   | 392.78          | 35.83          | 20.01          | -15.82        | 82.30          | 62.29       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 33.67          | 26.41          | -7.26         | 82.30          | 55.89       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 32.47          | 28.15          | -4.32         | 82.30          | 54.15       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

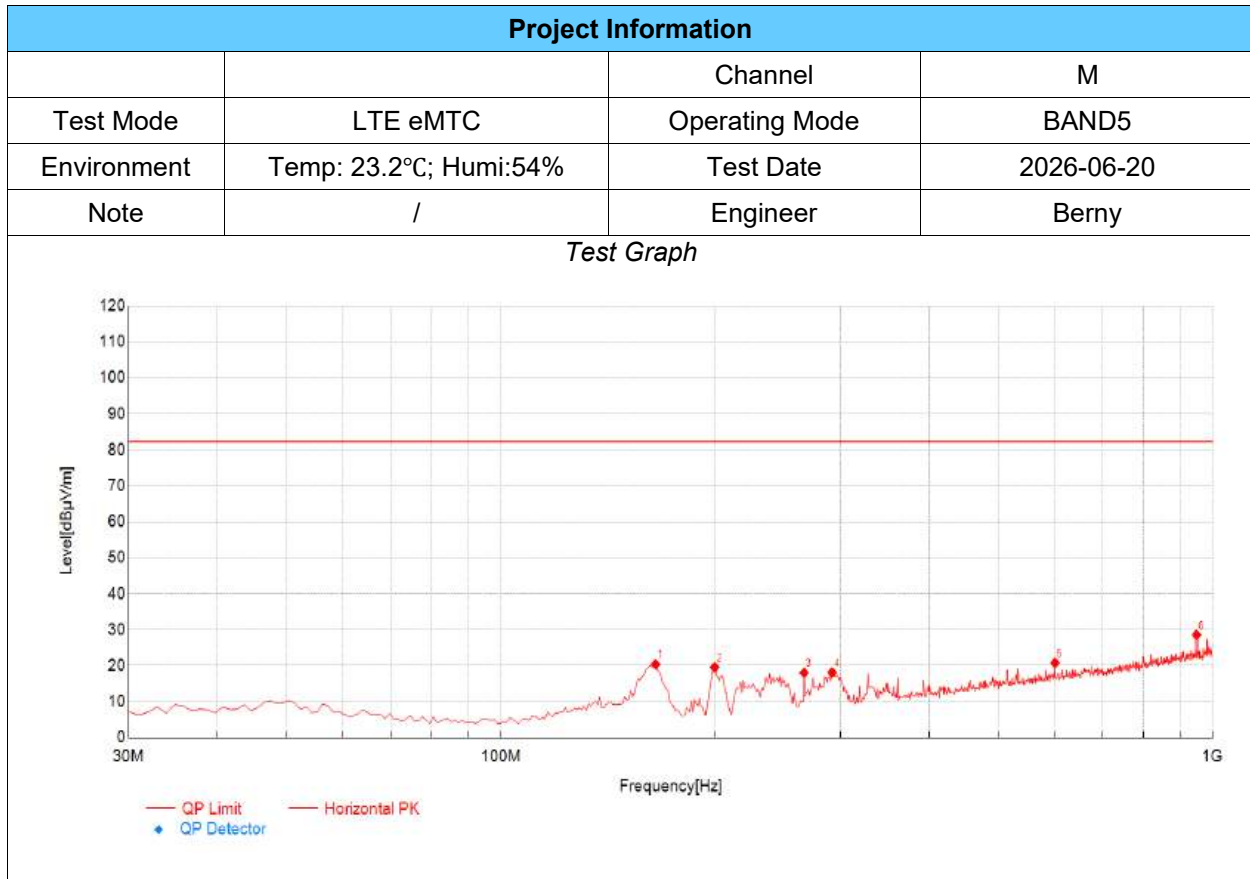


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 164.83          | 39.12          | 20.41          | -18.71        | 82.30          | 61.89       | PK  | Horizontal | PASS    |
| 2                   | 199.75          | 41.85          | 19.53          | -22.32        | 82.30          | 62.77       | PK  | Horizontal | PASS    |
| 3                   | 266.68          | 37.89          | 18.03          | -19.86        | 82.30          | 64.27       | PK  | Horizontal | PASS    |
| 4                   | 291.90          | 37.18          | 18.11          | -19.07        | 82.30          | 64.19       | PK  | Horizontal | PASS    |
| 5                   | 600.36          | 31.57          | 20.78          | -10.79        | 82.30          | 61.52       | PK  | Horizontal | PASS    |
| 6                   | 948.59          | 32.91          | 28.61          | -4.30         | 82.30          | 53.69       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

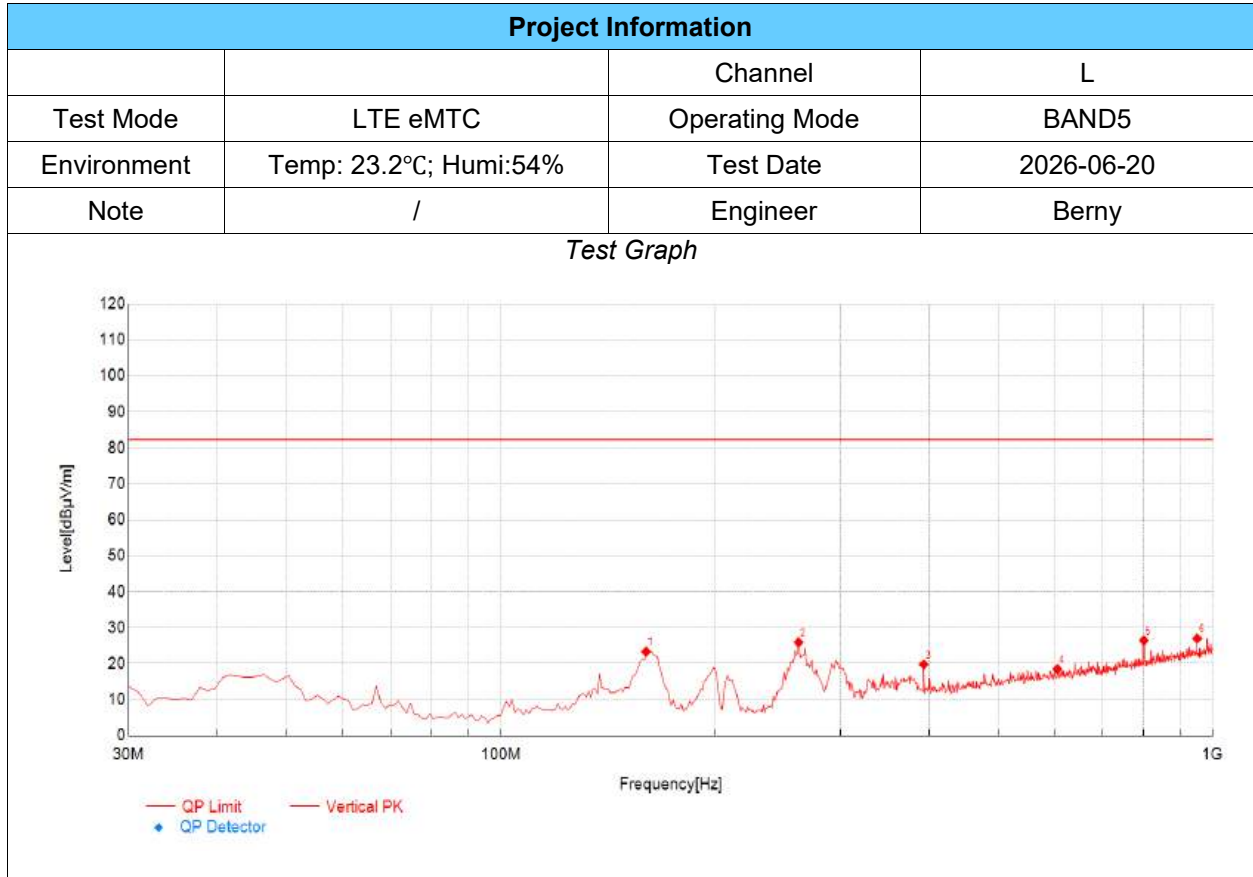

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 159.98          | 41.45          | 23.35          | -18.10        | 82.30          | 58.95       | PK  | Vertical | PASS    |
| 2                   | 261.83          | 45.98          | 25.93          | -20.05        | 82.30          | 56.37       | PK  | Vertical | PASS    |
| 3                   | 392.78          | 35.60          | 19.78          | -15.82        | 82.30          | 62.52       | PK  | Vertical | PASS    |
| 4                   | 605.21          | 29.13          | 18.46          | -10.67        | 82.30          | 63.84       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 33.71          | 26.45          | -7.26         | 82.30          | 55.85       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 31.31          | 26.99          | -4.32         | 82.30          | 55.31       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

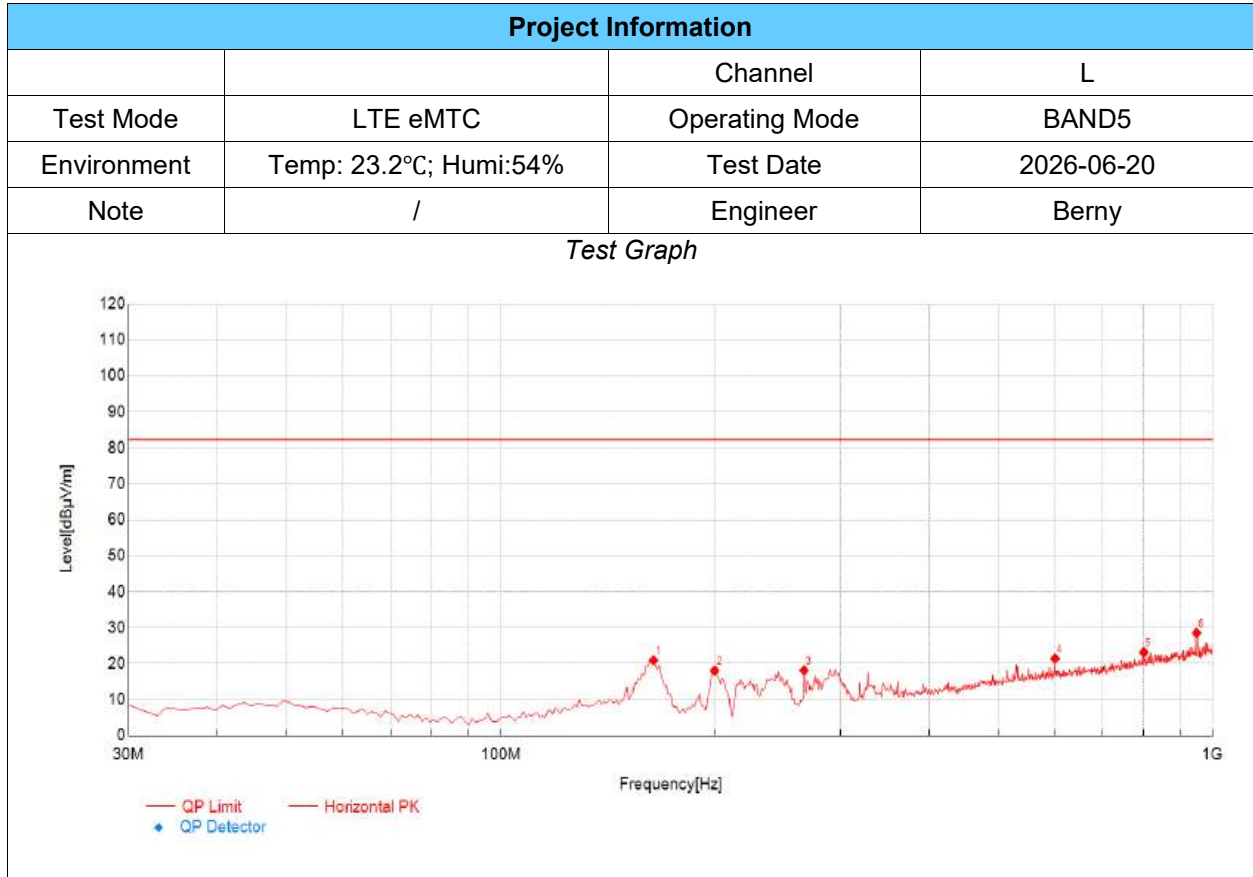


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 163.86          | 39.55          | 20.94          | -18.61        | 82.30          | 61.36       | PK  | Horizontal | PASS    |
| 2                   | 199.75          | 40.39          | 18.07          | -22.32        | 82.30          | 64.23       | PK  | Horizontal | PASS    |
| 3                   | 266.68          | 38.01          | 18.15          | -19.86        | 82.30          | 64.15       | PK  | Horizontal | PASS    |
| 4                   | 600.36          | 32.23          | 21.44          | -10.79        | 82.30          | 60.86       | PK  | Horizontal | PASS    |
| 5                   | 800.18          | 30.41          | 23.15          | -7.26         | 82.30          | 59.15       | PK  | Horizontal | PASS    |
| 6                   | 948.59          | 32.89          | 28.59          | -4.30         | 82.30          | 53.71       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

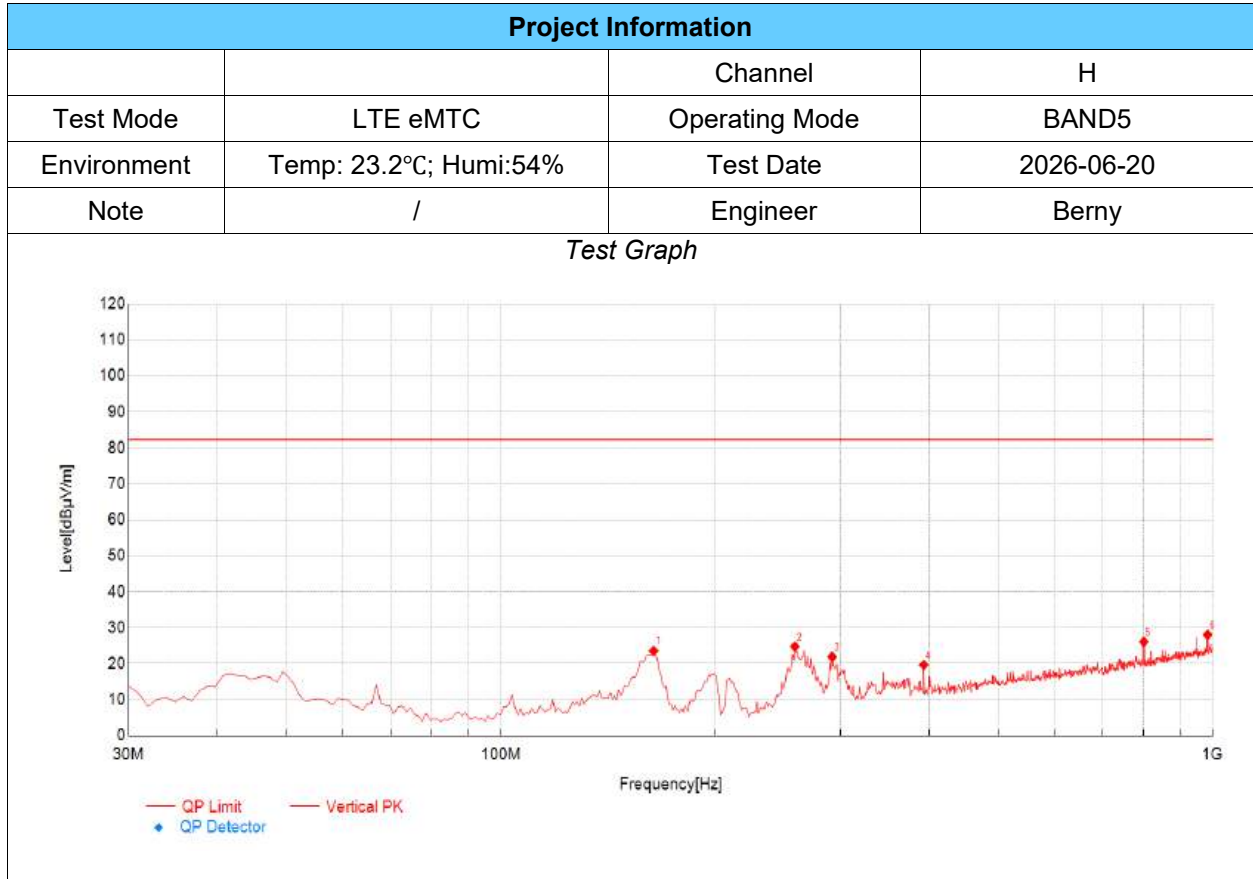


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 163.86          | 42.16          | 23.55          | -18.61        | 82.30          | 58.75       | PK  | Vertical | PASS    |
| 2                   | 258.92          | 44.84          | 24.73          | -20.11        | 82.30          | 57.57       | PK  | Vertical | PASS    |
| 3                   | 291.90          | 41.01          | 21.94          | -19.07        | 82.30          | 60.36       | PK  | Vertical | PASS    |
| 4                   | 392.78          | 35.45          | 19.63          | -15.82        | 82.30          | 62.67       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 33.35          | 26.09          | -7.26         | 82.30          | 56.21       | PK  | Vertical | PASS    |
| 6                   | 983.51          | 32.01          | 28.04          | -3.97         | 82.30          | 54.26       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

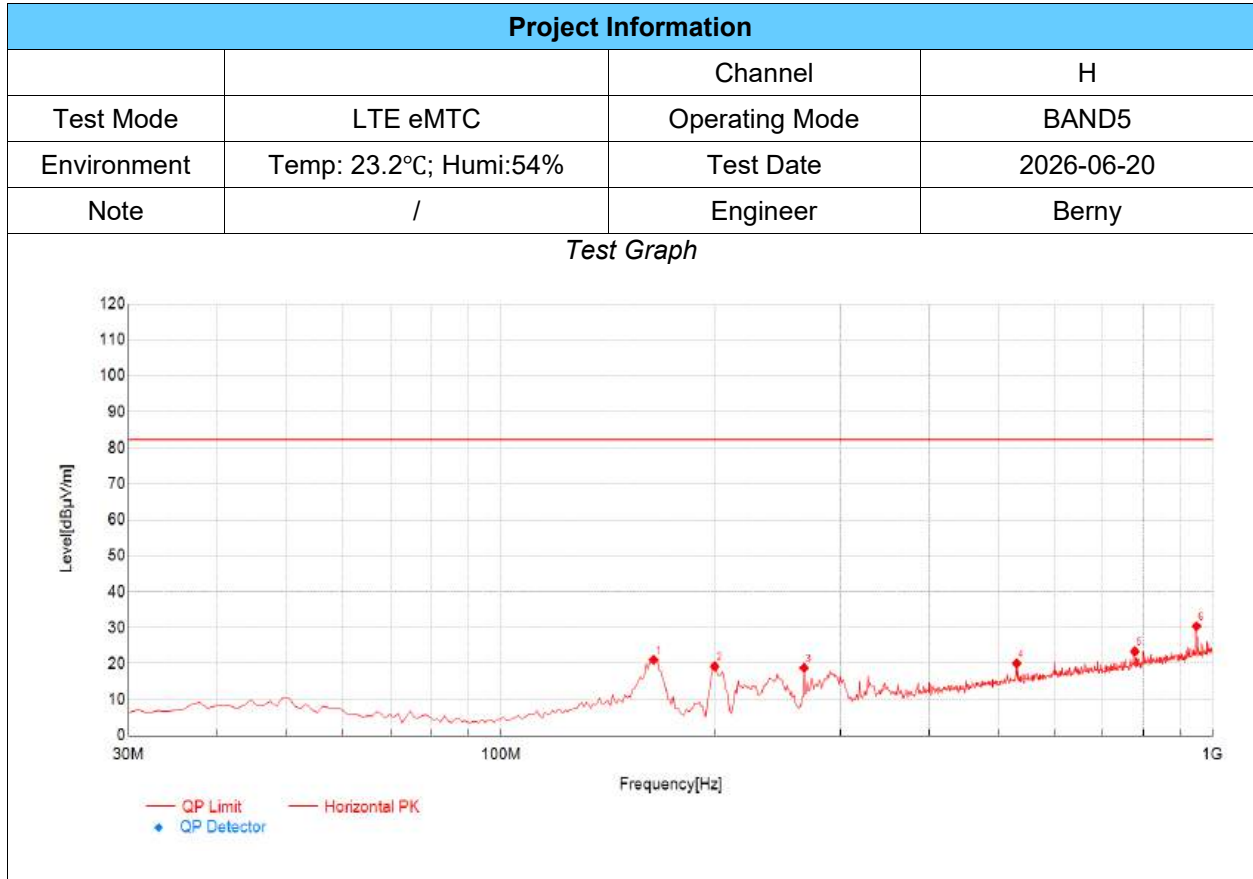


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 163.86          | 39.71          | 21.10          | -18.61        | 82.30          | 61.20       | PK  | Horizontal | PASS    |
| 2                   | 199.75          | 41.55          | 19.23          | -22.32        | 82.30          | 63.07       | PK  | Horizontal | PASS    |
| 3                   | 266.68          | 38.68          | 18.82          | -19.86        | 82.30          | 63.48       | PK  | Horizontal | PASS    |
| 4                   | 530.52          | 32.55          | 20.08          | -12.47        | 82.30          | 62.22       | PK  | Horizontal | PASS    |
| 5                   | 776.90          | 31.19          | 23.39          | -7.80         | 82.30          | 58.91       | PK  | Horizontal | PASS    |
| 6                   | 948.59          | 34.69          | 30.39          | -4.30         | 82.30          | 51.91       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

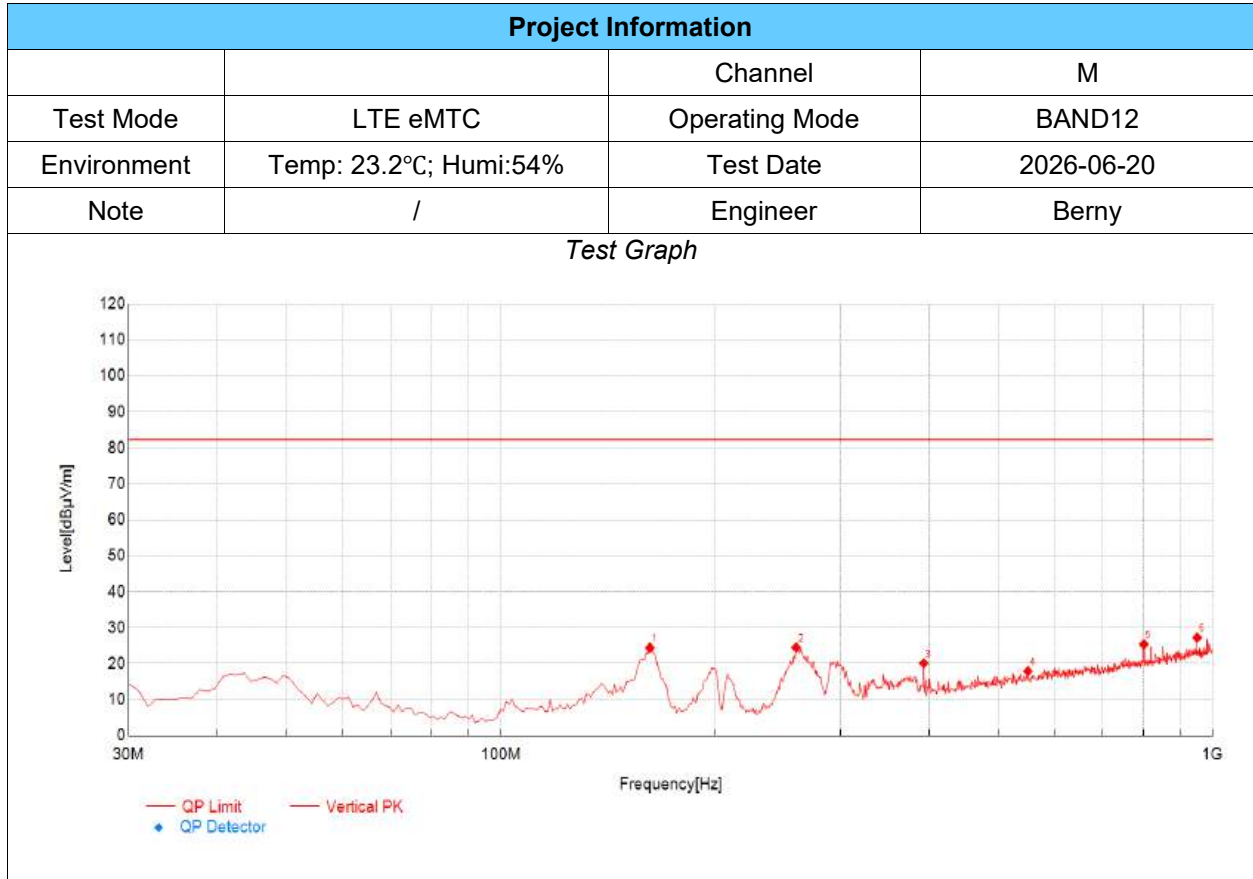


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 161.92          | 42.75          | 24.39          | -18.36        | 82.30          | 57.91       | PK  | Vertical | PASS    |
| 2                   | 259.89          | 44.57          | 24.51          | -20.06        | 82.30          | 57.79       | PK  | Vertical | PASS    |
| 3                   | 392.78          | 35.95          | 20.13          | -15.82        | 82.30          | 62.17       | PK  | Vertical | PASS    |
| 4                   | 549.92          | 29.90          | 17.92          | -11.98        | 82.30          | 64.38       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 32.66          | 25.40          | -7.26         | 82.30          | 56.90       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 31.57          | 27.25          | -4.32         | 82.30          | 55.05       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

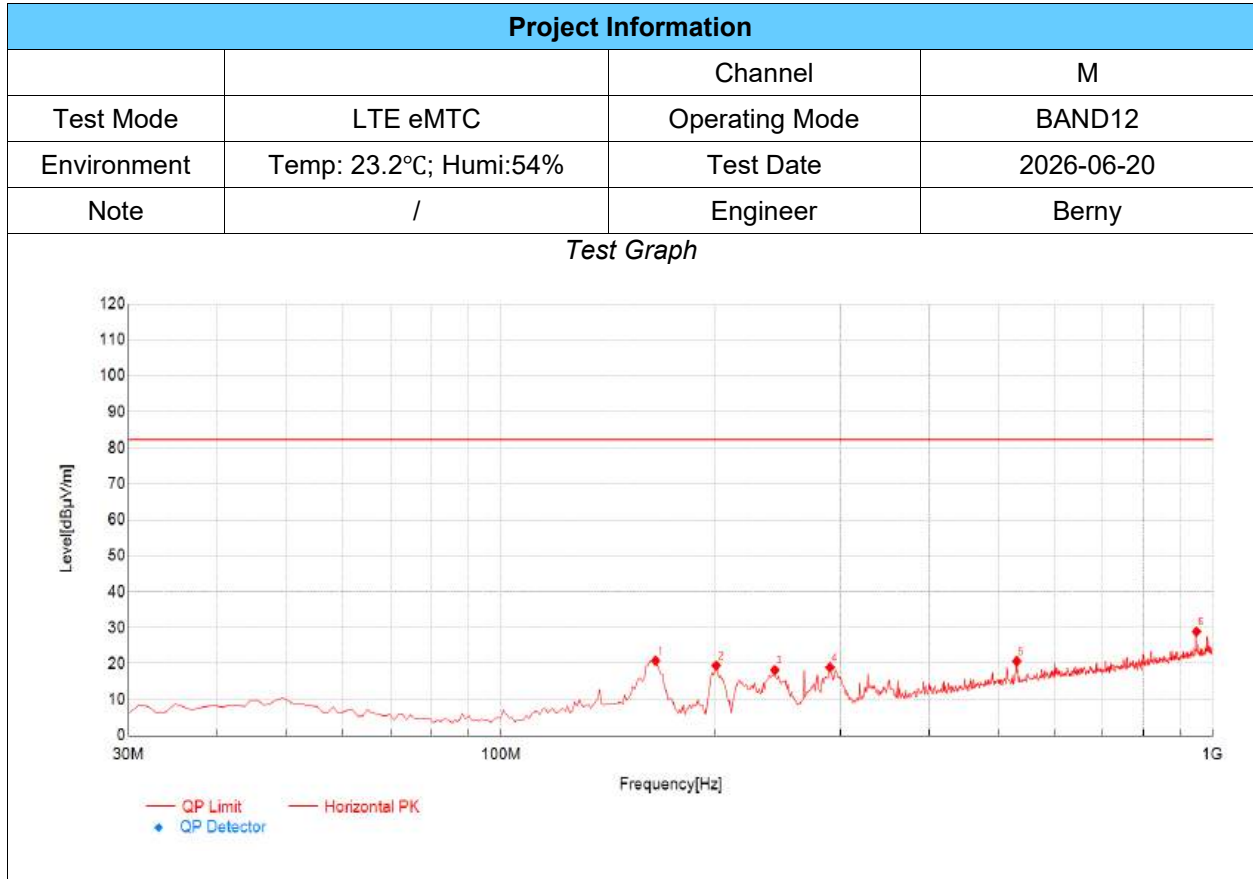

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 164.83          | 39.55          | 20.84          | -18.71        | 82.30          | 61.46       | PK  | Horizontal | PASS    |
| 2                   | 200.72          | 41.81          | 19.45          | -22.36        | 82.30          | 62.85       | PK  | Horizontal | PASS    |
| 3                   | 242.43          | 38.65          | 18.22          | -20.43        | 82.30          | 64.08       | PK  | Horizontal | PASS    |
| 4                   | 289.96          | 38.13          | 18.97          | -19.16        | 82.30          | 63.33       | PK  | Horizontal | PASS    |
| 5                   | 530.52          | 33.17          | 20.70          | -12.47        | 82.30          | 61.60       | PK  | Horizontal | PASS    |
| 6                   | 948.59          | 33.20          | 28.90          | -4.30         | 82.30          | 53.40       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

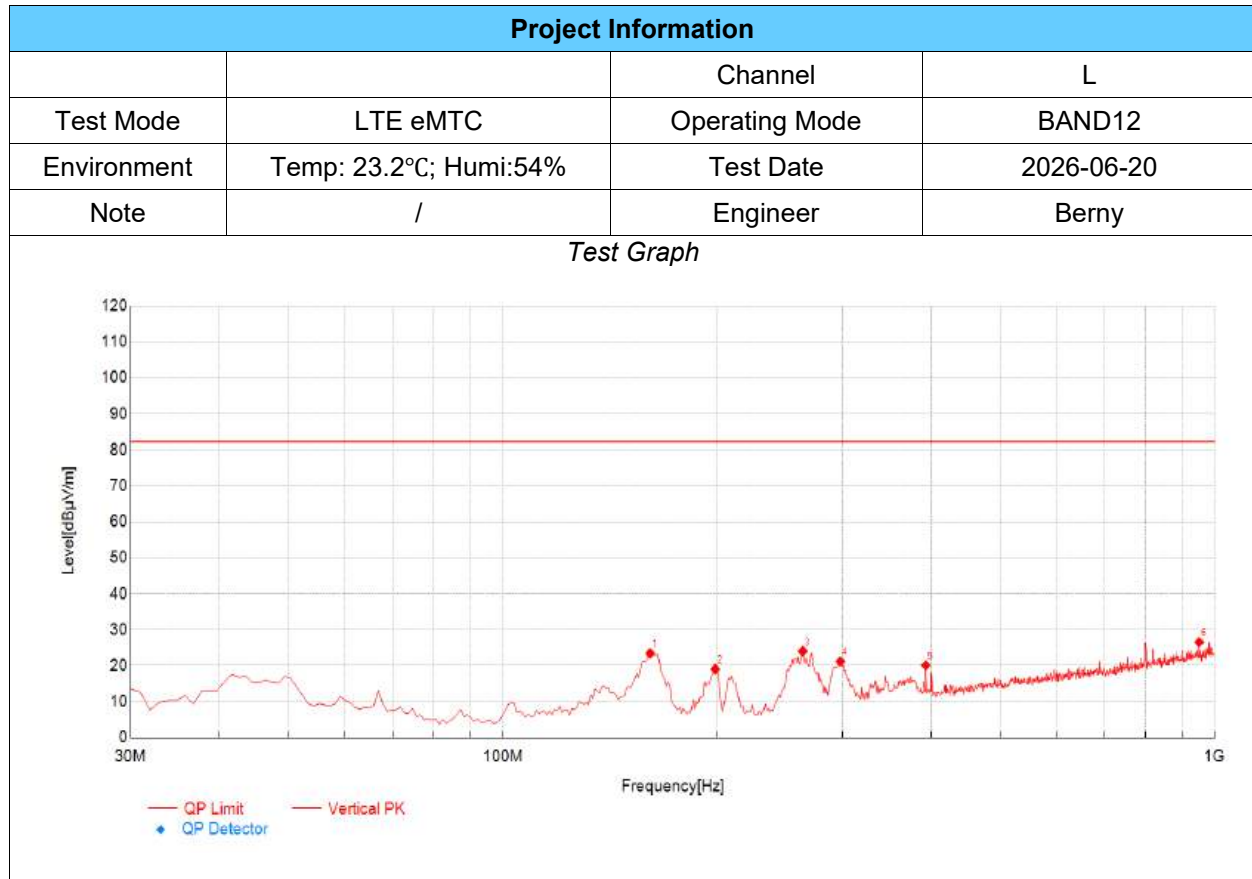


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 160.95          | 41.68          | 23.43          | -18.25        | 82.30          | 58.87       | PK  | Vertical | PASS    |
| 2                   | 198.78          | 41.30          | 19.02          | -22.28        | 82.30          | 63.28       | PK  | Vertical | PASS    |
| 3                   | 263.77          | 43.99          | 24.02          | -19.97        | 82.30          | 58.28       | PK  | Vertical | PASS    |
| 4                   | 297.72          | 39.96          | 21.19          | -18.77        | 82.30          | 61.11       | PK  | Vertical | PASS    |
| 5                   | 392.78          | 35.93          | 20.11          | -15.82        | 82.30          | 62.19       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 30.85          | 26.53          | -4.32         | 82.30          | 55.77       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

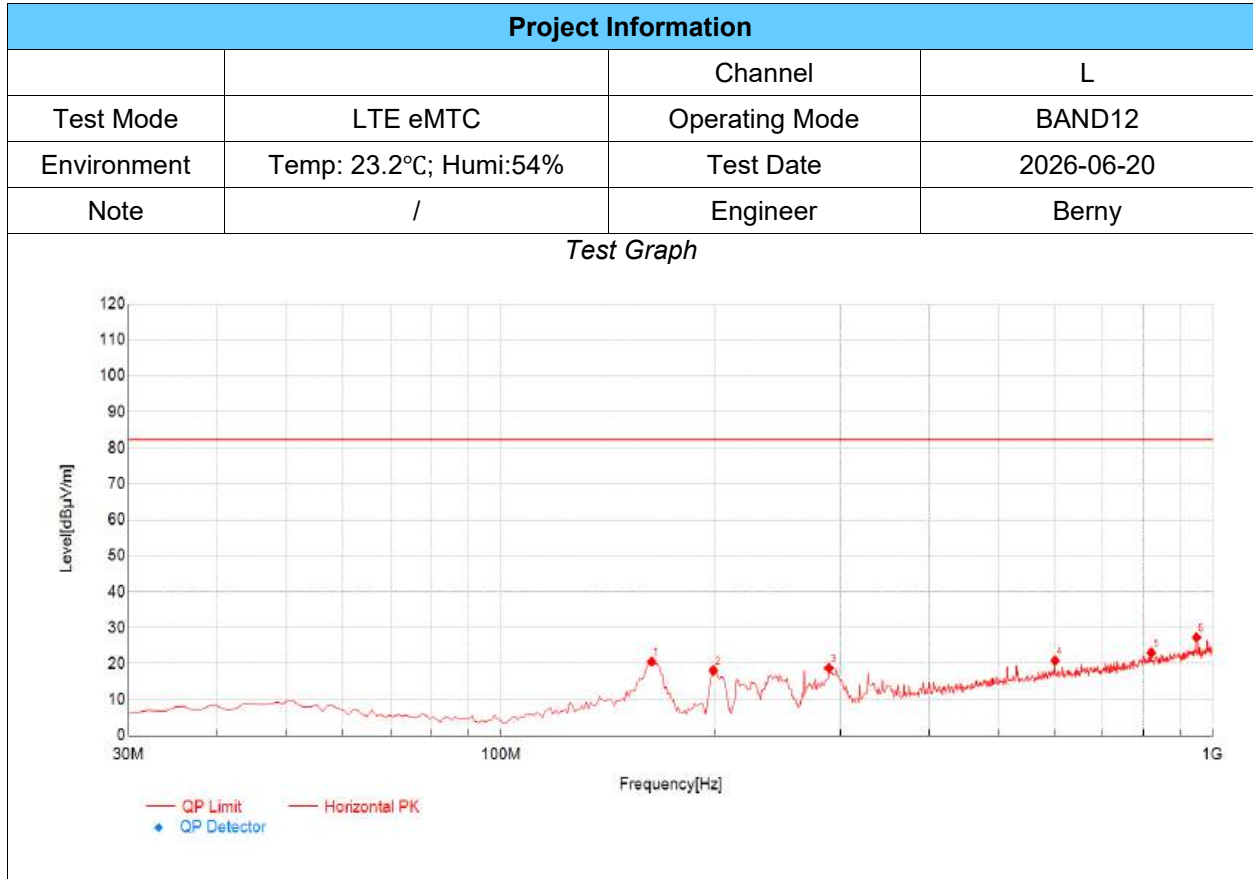

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 162.89          | 39.04          | 20.56          | -18.48        | 82.30          | 61.74       | PK  | Horizontal | PASS    |
| 2                   | 198.78          | 40.40          | 18.12          | -22.28        | 82.30          | 64.18       | PK  | Horizontal | PASS    |
| 3                   | 288.99          | 37.99          | 18.79          | -19.20        | 82.30          | 63.51       | PK  | Horizontal | PASS    |
| 4                   | 600.36          | 31.66          | 20.87          | -10.79        | 82.30          | 61.43       | PK  | Horizontal | PASS    |
| 5                   | 819.58          | 29.96          | 23.05          | -6.91         | 82.30          | 59.25       | PK  | Horizontal | PASS    |
| 6                   | 948.59          | 31.64          | 27.34          | -4.30         | 82.30          | 54.96       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | H          |
| Test Mode           | LTE eMTC               | Operating Mode | BAND12     |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

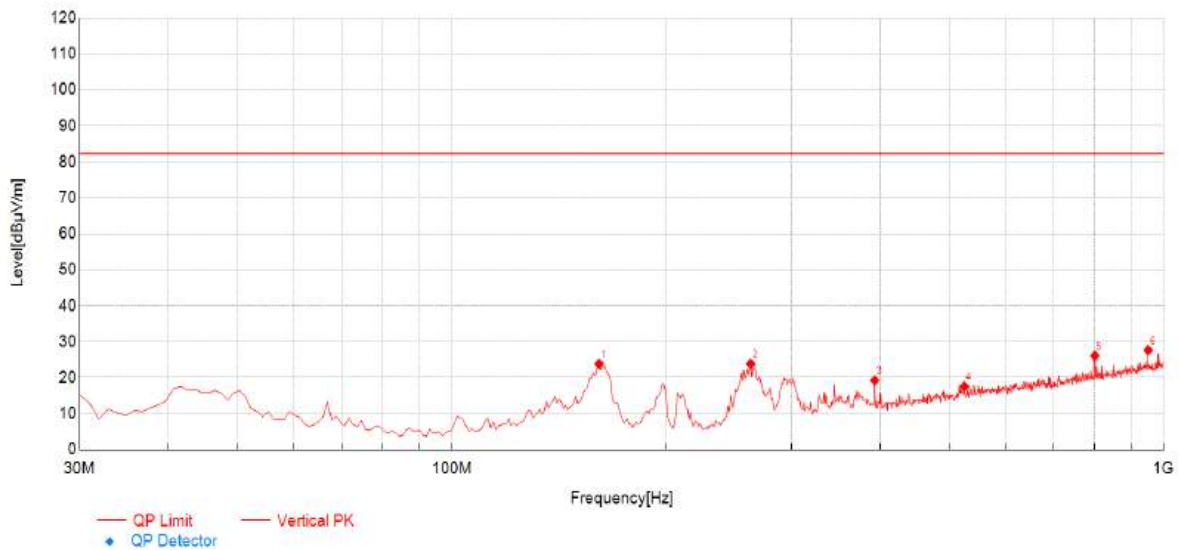


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 160.95          | 42.04          | 23.79          | -18.25        | 82.30          | 58.51       | PK  | Vertical | PASS    |
| 2                   | 262.80          | 43.82          | 23.82          | -20.00        | 82.30          | 58.48       | PK  | Vertical | PASS    |
| 3                   | 392.78          | 35.05          | 19.23          | -15.82        | 82.30          | 63.07       | PK  | Vertical | PASS    |
| 4                   | 524.70          | 30.14          | 17.56          | -12.58        | 82.30          | 64.74       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 33.35          | 26.09          | -7.26         | 82.30          | 56.21       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 31.99          | 27.67          | -4.32         | 82.30          | 54.63       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

## TX Radiated Test Result

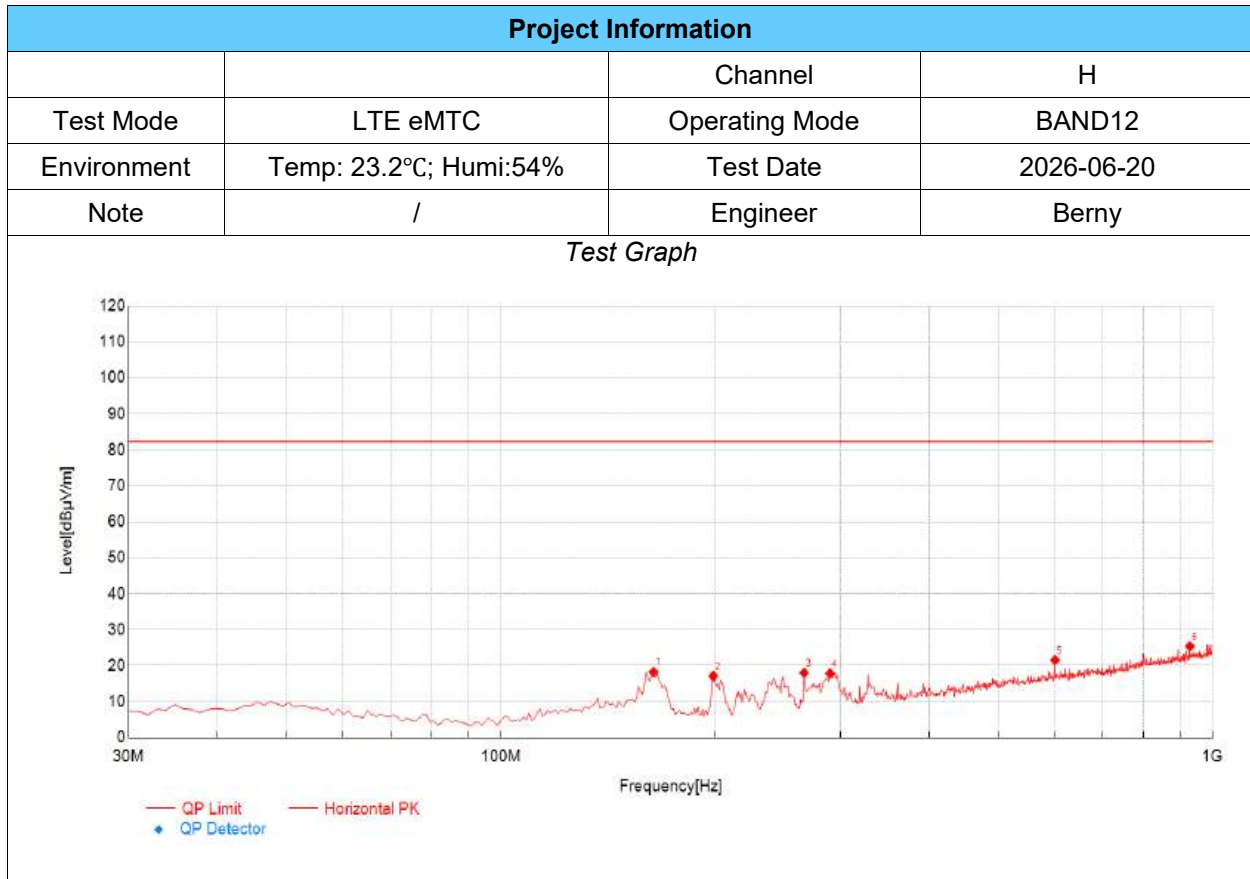


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 163.86          | 36.85          | 18.24          | -18.61        | 82.30          | 64.06       | PK  | Horizontal | PASS    |
| 2                   | 198.78          | 39.41          | 17.13          | -22.28        | 82.30          | 65.17       | PK  | Horizontal | PASS    |
| 3                   | 266.68          | 37.87          | 18.01          | -19.86        | 82.30          | 64.29       | PK  | Horizontal | PASS    |
| 4                   | 289.96          | 37.03          | 17.87          | -19.16        | 82.30          | 64.43       | PK  | Horizontal | PASS    |
| 5                   | 600.36          | 32.34          | 21.55          | -10.79        | 82.30          | 60.75       | PK  | Horizontal | PASS    |
| 6                   | 928.22          | 30.18          | 25.40          | -4.78         | 82.30          | 56.90       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

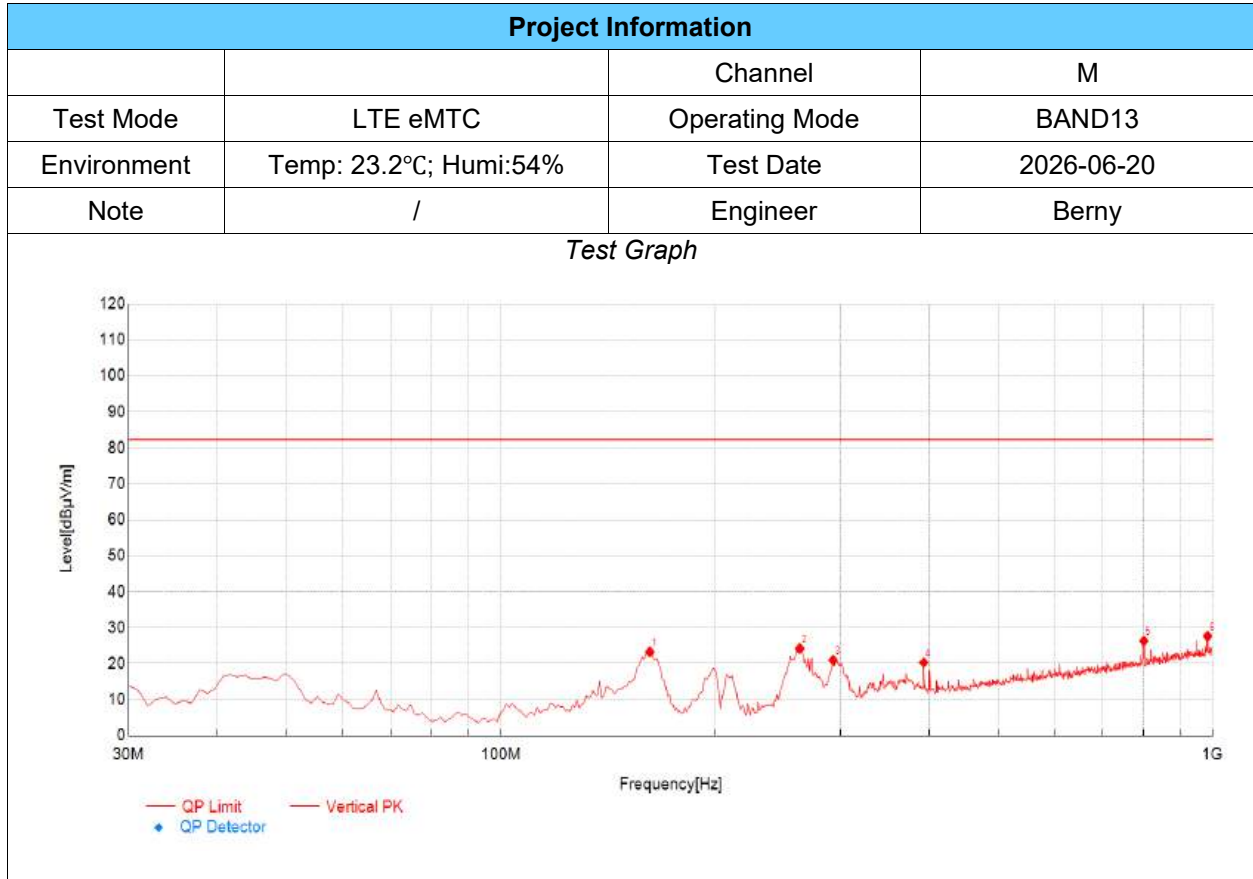


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 161.92          | 41.64          | 23.28          | -18.36        | 82.30          | 59.02       | PK  | Vertical | PASS    |
| 2                   | 262.80          | 44.22          | 24.22          | -20.00        | 82.30          | 58.08       | PK  | Vertical | PASS    |
| 3                   | 292.87          | 40.01          | 20.99          | -19.02        | 82.30          | 61.31       | PK  | Vertical | PASS    |
| 4                   | 392.78          | 36.16          | 20.34          | -15.82        | 82.30          | 61.96       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 33.58          | 26.32          | -7.26         | 82.30          | 55.98       | PK  | Vertical | PASS    |
| 6                   | 983.51          | 31.64          | 27.67          | -3.97         | 82.30          | 54.63       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

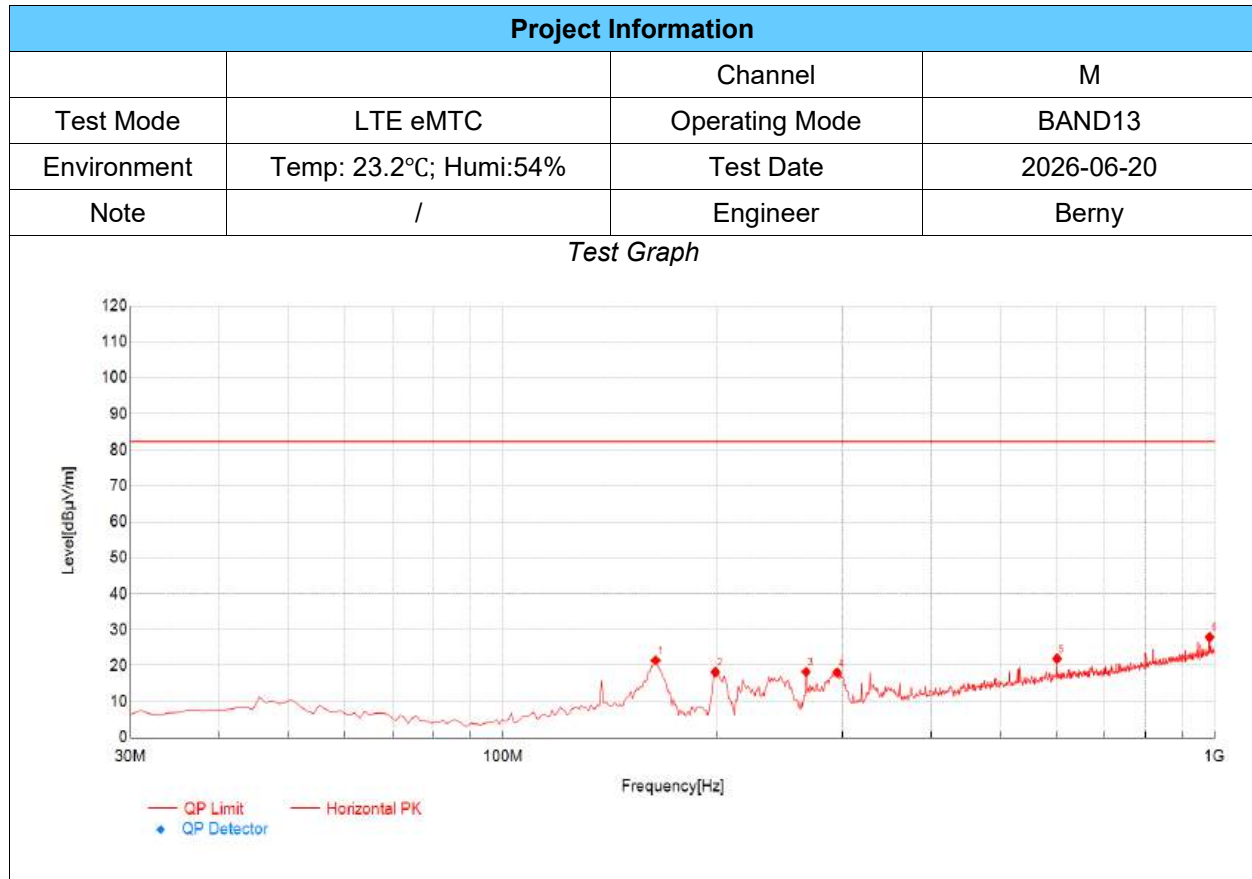


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 163.86          | 40.11          | 21.50          | -18.61        | 82.30          | 60.80       | PK  | Horizontal | PASS    |
| 2                   | 198.78          | 40.50          | 18.22          | -22.28        | 82.30          | 64.08       | PK  | Horizontal | PASS    |
| 3                   | 266.68          | 38.11          | 18.25          | -19.86        | 82.30          | 64.05       | PK  | Horizontal | PASS    |
| 4                   | 294.81          | 37.08          | 18.13          | -18.95        | 82.30          | 64.17       | PK  | Horizontal | PASS    |
| 5                   | 600.36          | 32.74          | 21.95          | -10.79        | 82.30          | 60.35       | PK  | Horizontal | PASS    |
| 6                   | 983.51          | 31.90          | 27.93          | -3.97         | 82.30          | 54.37       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

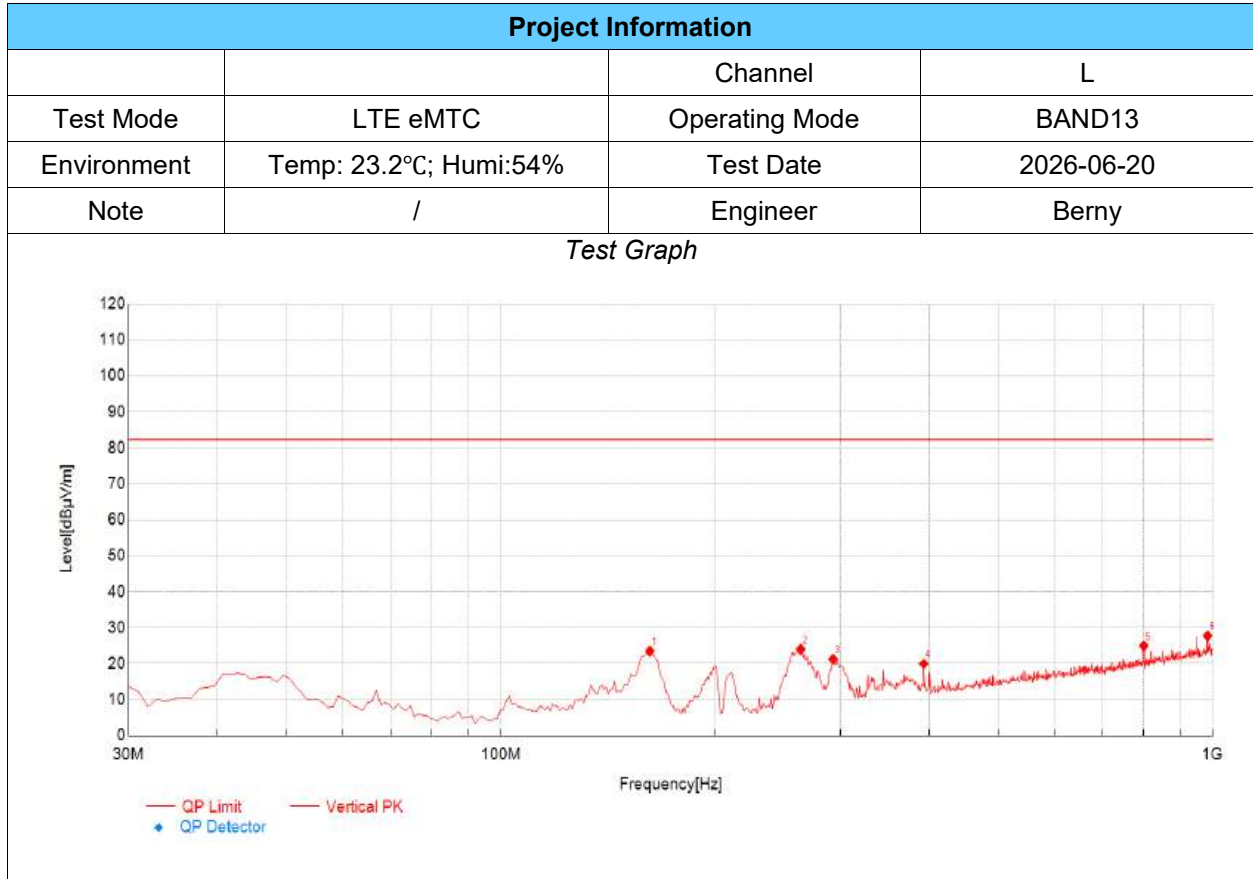


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 161.92          | 41.87          | 23.51          | -18.36        | 82.30          | 58.79       | PK  | Vertical | PASS    |
| 2                   | 263.77          | 43.97          | 24.00          | -19.97        | 82.30          | 58.30       | PK  | Vertical | PASS    |
| 3                   | 292.87          | 40.30          | 21.28          | -19.02        | 82.30          | 61.02       | PK  | Vertical | PASS    |
| 4                   | 392.78          | 35.78          | 19.96          | -15.82        | 82.30          | 62.34       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 32.21          | 24.95          | -7.26         | 82.30          | 57.35       | PK  | Vertical | PASS    |
| 6                   | 983.51          | 31.72          | 27.75          | -3.97         | 82.30          | 54.55       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

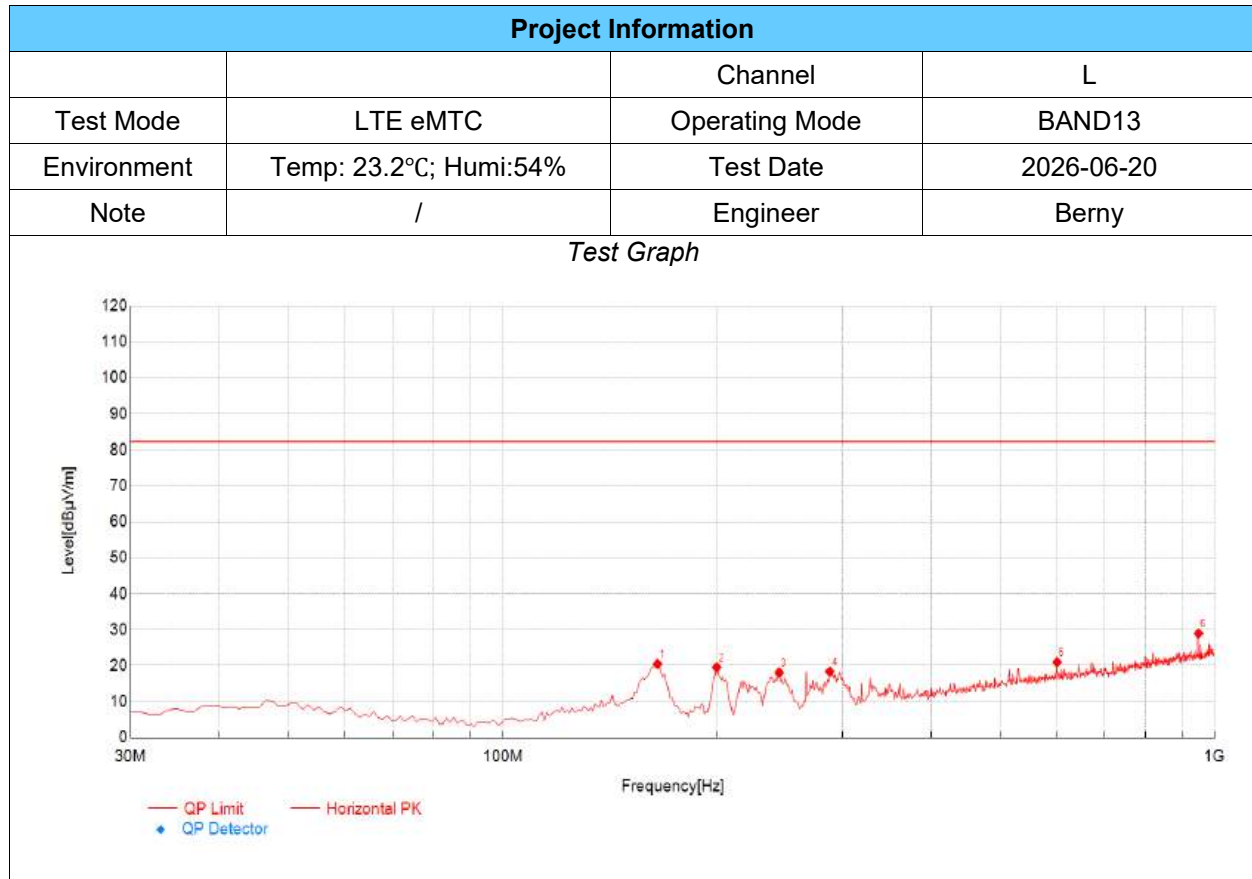

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 164.83          | 39.21          | 20.50          | -18.71        | 82.30          | 61.80       | PK  | Horizontal | PASS    |
| 2                   | 199.75          | 41.83          | 19.51          | -22.32        | 82.30          | 62.79       | PK  | Horizontal | PASS    |
| 3                   | 244.37          | 38.40          | 18.06          | -20.34        | 82.30          | 64.24       | PK  | Horizontal | PASS    |
| 4                   | 288.02          | 37.60          | 18.36          | -19.24        | 82.30          | 63.94       | PK  | Horizontal | PASS    |
| 5                   | 600.36          | 31.75          | 20.96          | -10.79        | 82.30          | 61.34       | PK  | Horizontal | PASS    |
| 6                   | 948.59          | 33.24          | 28.94          | -4.30         | 82.30          | 53.36       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

## TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | H          |
| Test Mode           | LTE eMTC               | Operating Mode | BAND13     |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

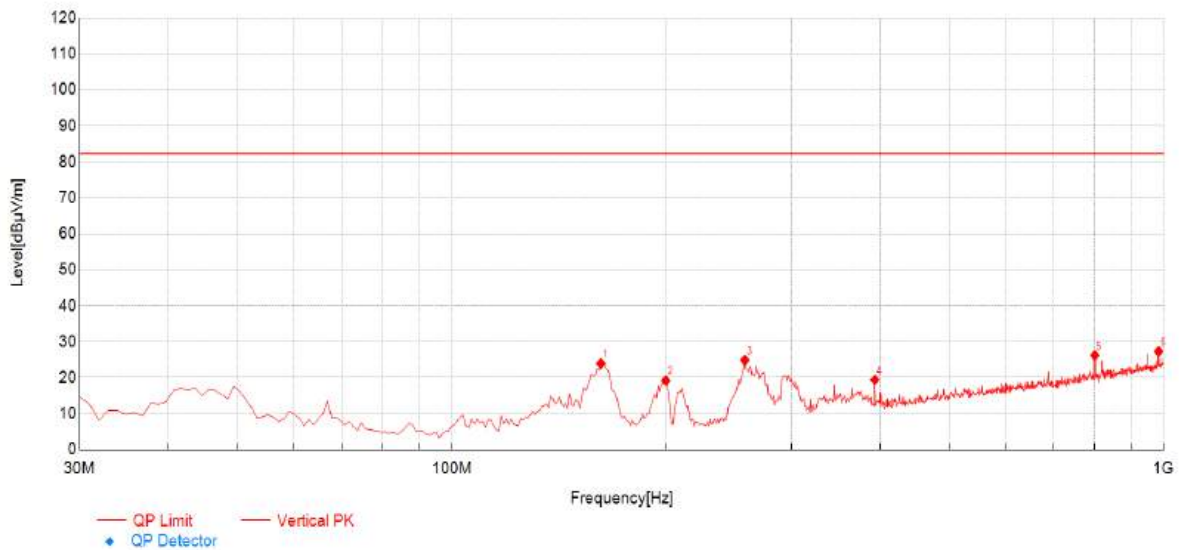


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 161.92          | 42.28          | 23.92          | -18.36        | 82.30          | 58.38       | PK  | Vertical | PASS    |
| 2                   | 199.75          | 41.50          | 19.18          | -22.32        | 82.30          | 63.12       | PK  | Vertical | PASS    |
| 3                   | 257.95          | 44.99          | 24.87          | -20.12        | 82.30          | 57.43       | PK  | Vertical | PASS    |
| 4                   | 392.78          | 35.20          | 19.38          | -15.82        | 82.30          | 62.92       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 33.47          | 26.21          | -7.26         | 82.30          | 56.09       | PK  | Vertical | PASS    |
| 6                   | 983.51          | 31.31          | 27.34          | -3.97         | 82.30          | 54.96       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

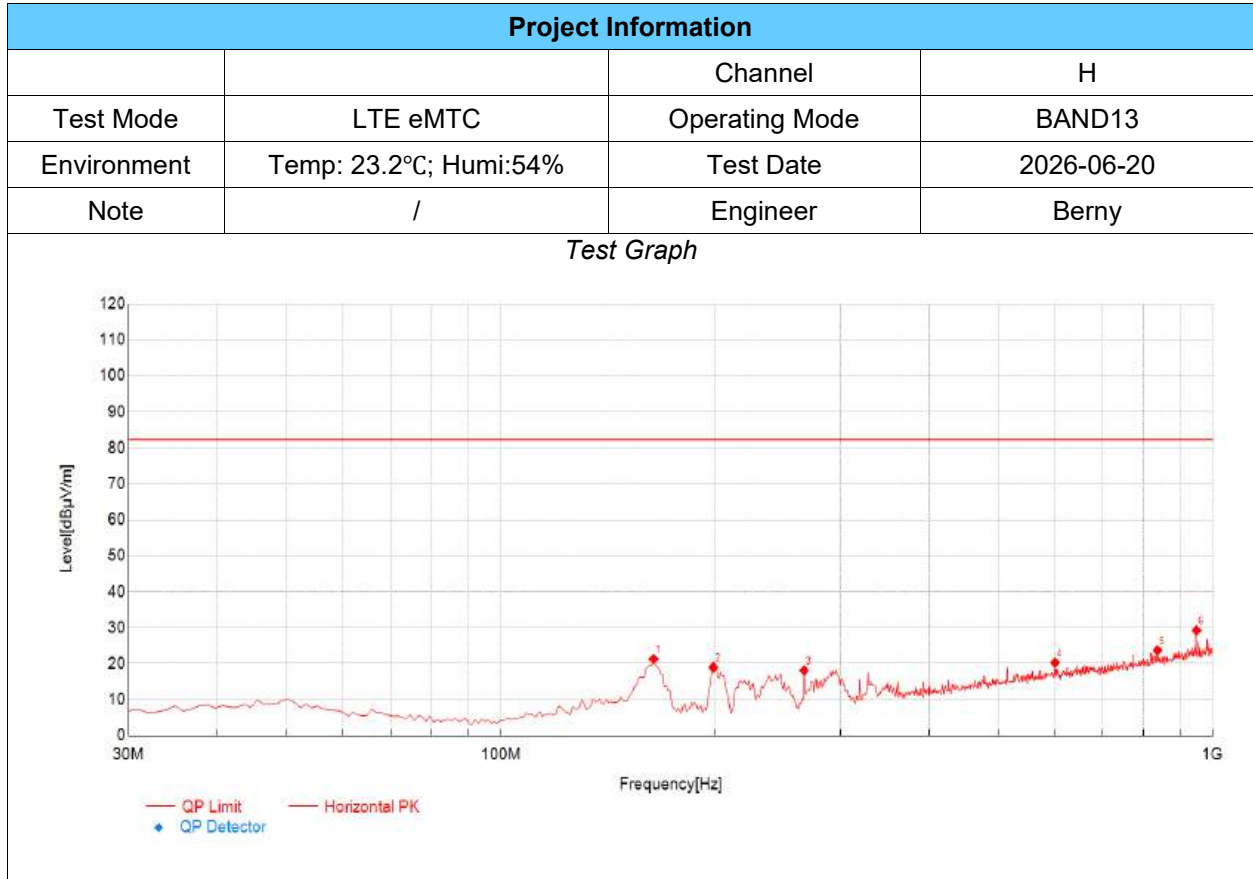

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 163.86          | 39.93          | 21.32          | -18.61        | 82.30          | 60.98       | PK  | Horizontal | PASS    |
| 2                   | 198.78          | 41.26          | 18.98          | -22.28        | 82.30          | 63.32       | PK  | Horizontal | PASS    |
| 3                   | 266.68          | 38.00          | 18.14          | -19.86        | 82.30          | 64.16       | PK  | Horizontal | PASS    |
| 4                   | 600.36          | 31.10          | 20.31          | -10.79        | 82.30          | 61.99       | PK  | Horizontal | PASS    |
| 5                   | 836.07          | 30.28          | 23.72          | -6.56         | 82.30          | 58.58       | PK  | Horizontal | PASS    |
| 6                   | 948.59          | 33.54          | 29.24          | -4.30         | 82.30          | 53.06       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

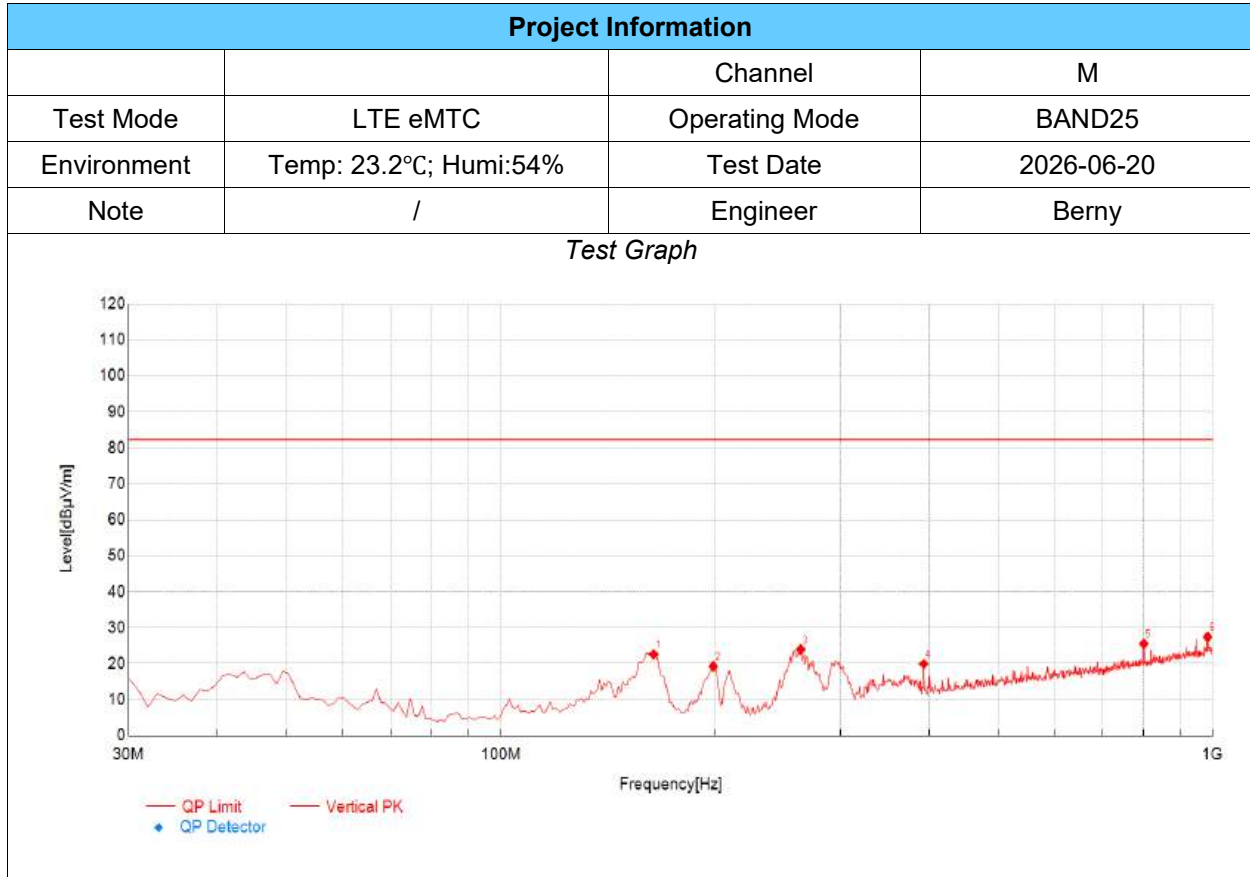


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 163.86          | 41.22          | 22.61          | -18.61        | 82.30          | 59.69       | PK  | Vertical | PASS    |
| 2                   | 198.78          | 41.51          | 19.23          | -22.28        | 82.30          | 63.07       | PK  | Vertical | PASS    |
| 3                   | 263.77          | 43.91          | 23.94          | -19.97        | 82.30          | 58.36       | PK  | Vertical | PASS    |
| 4                   | 392.78          | 35.75          | 19.93          | -15.82        | 82.30          | 62.37       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 32.80          | 25.54          | -7.26         | 82.30          | 56.76       | PK  | Vertical | PASS    |
| 6                   | 983.51          | 31.42          | 27.45          | -3.97         | 82.30          | 54.85       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

## TX Radiated Test Result

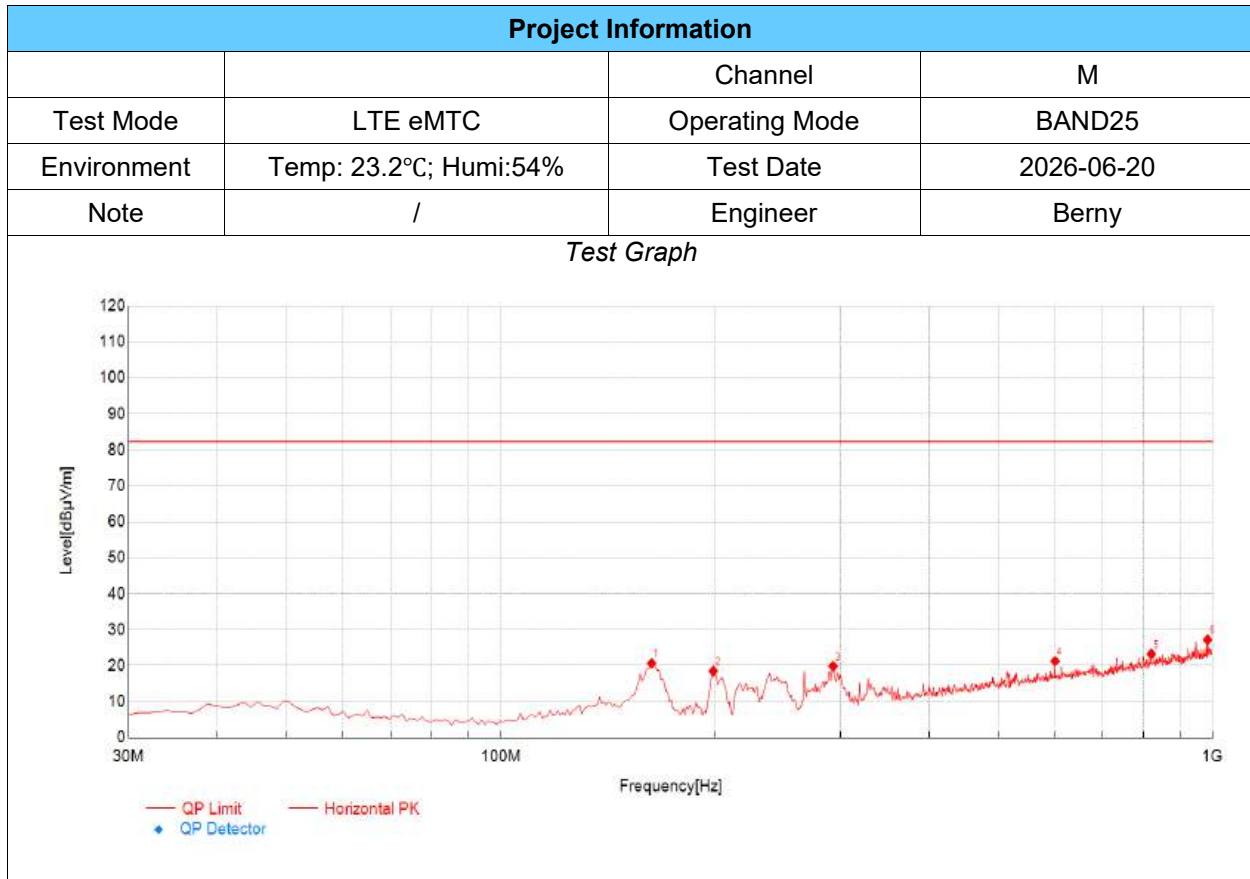

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 162.89          | 39.15          | 20.67          | -18.48        | 82.30          | 61.63       | PK  | Horizontal | PASS    |
| 2                   | 198.78          | 40.77          | 18.49          | -22.28        | 82.30          | 63.81       | PK  | Horizontal | PASS    |
| 3                   | 292.87          | 38.87          | 19.85          | -19.02        | 82.30          | 62.45       | PK  | Horizontal | PASS    |
| 4                   | 600.36          | 32.06          | 21.27          | -10.79        | 82.30          | 61.03       | PK  | Horizontal | PASS    |
| 5                   | 819.58          | 30.16          | 23.25          | -6.91         | 82.30          | 59.05       | PK  | Horizontal | PASS    |
| 6                   | 983.51          | 31.19          | 27.22          | -3.97         | 82.30          | 55.08       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | L          |
| Test Mode           | LTE eMTC               | Operating Mode | BAND25     |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

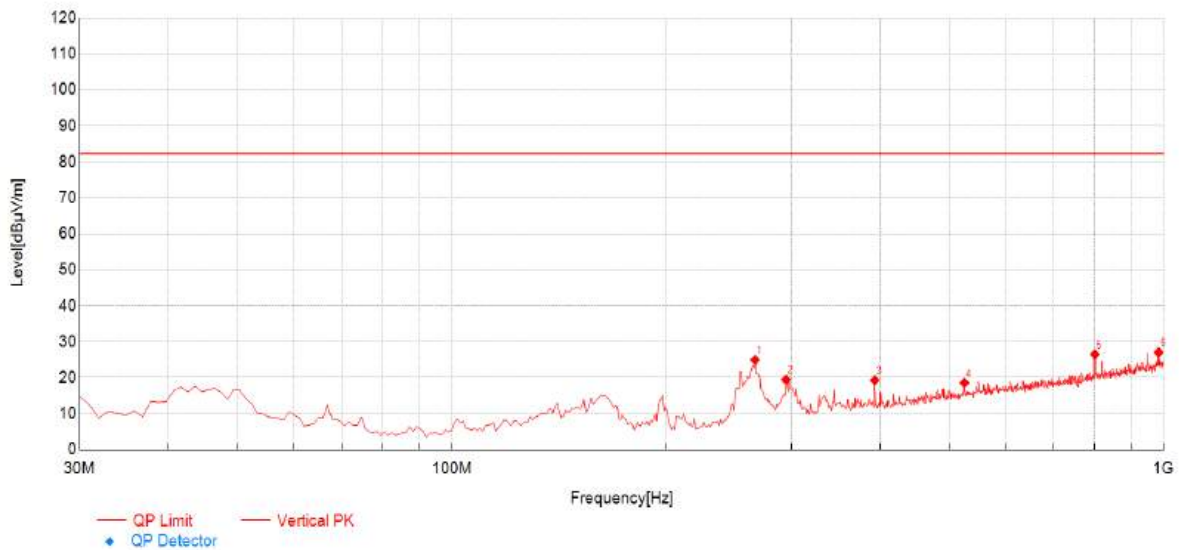


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 266.68          | 44.77          | 24.91          | -19.86        | 82.30          | 57.39       | PK  | Vertical | PASS    |
| 2                   | 294.81          | 38.38          | 19.43          | -18.95        | 82.30          | 62.87       | PK  | Vertical | PASS    |
| 3                   | 392.78          | 35.09          | 19.27          | -15.82        | 82.30          | 63.03       | PK  | Vertical | PASS    |
| 4                   | 524.70          | 31.12          | 18.54          | -12.58        | 82.30          | 63.76       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 33.71          | 26.45          | -7.26         | 82.30          | 55.85       | PK  | Vertical | PASS    |
| 6                   | 983.51          | 31.01          | 27.04          | -3.97         | 82.30          | 55.26       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

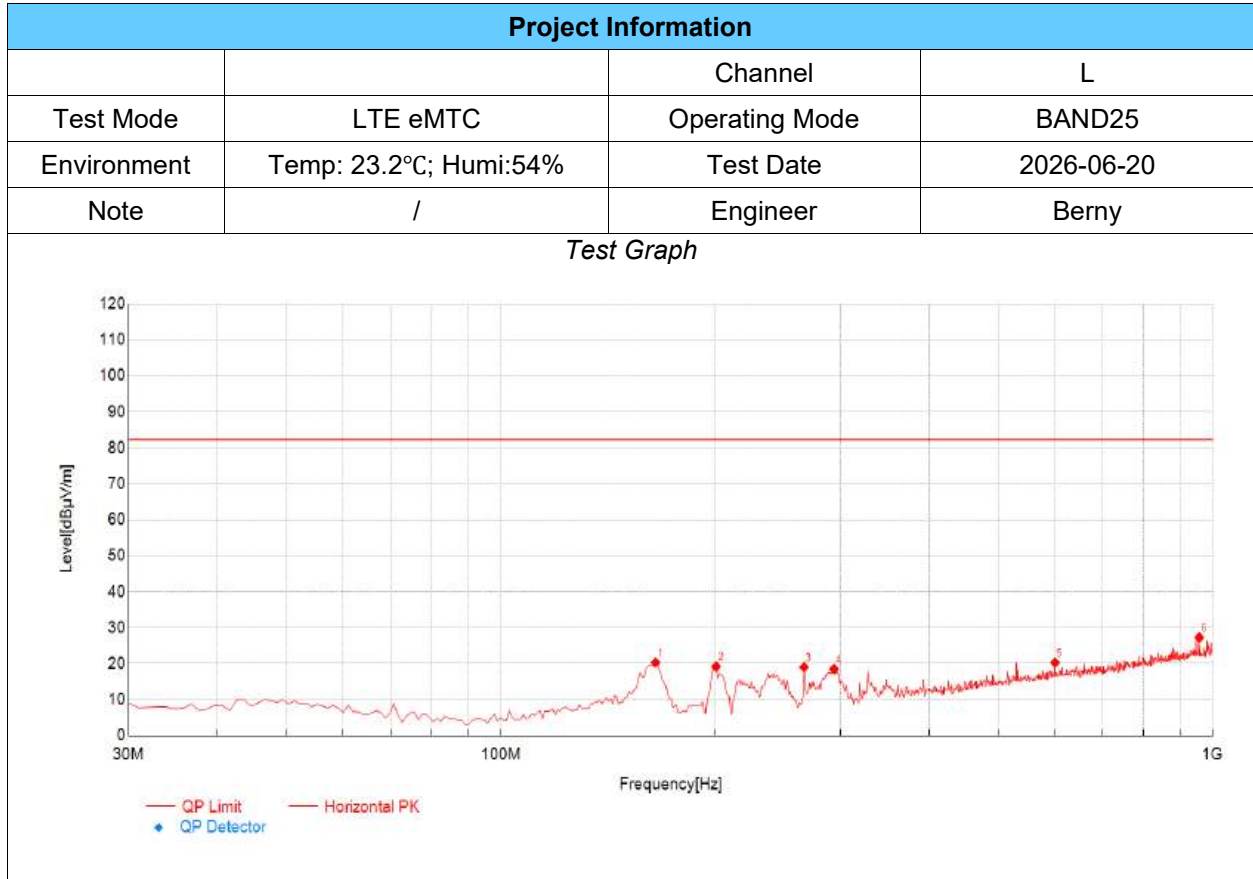


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 164.83          | 39.04          | 20.33          | -18.71        | 82.30          | 61.97       | PK  | Horizontal | PASS    |
| 2                   | 200.72          | 41.58          | 19.22          | -22.36        | 82.30          | 63.08       | PK  | Horizontal | PASS    |
| 3                   | 266.68          | 38.88          | 19.02          | -19.86        | 82.30          | 63.28       | PK  | Horizontal | PASS    |
| 4                   | 293.84          | 37.48          | 18.50          | -18.98        | 82.30          | 63.80       | PK  | Horizontal | PASS    |
| 5                   | 600.36          | 31.10          | 20.31          | -10.79        | 82.30          | 61.99       | PK  | Horizontal | PASS    |
| 6                   | 957.32          | 31.63          | 27.29          | -4.34         | 82.30          | 55.01       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

## TX Radiated Test Result

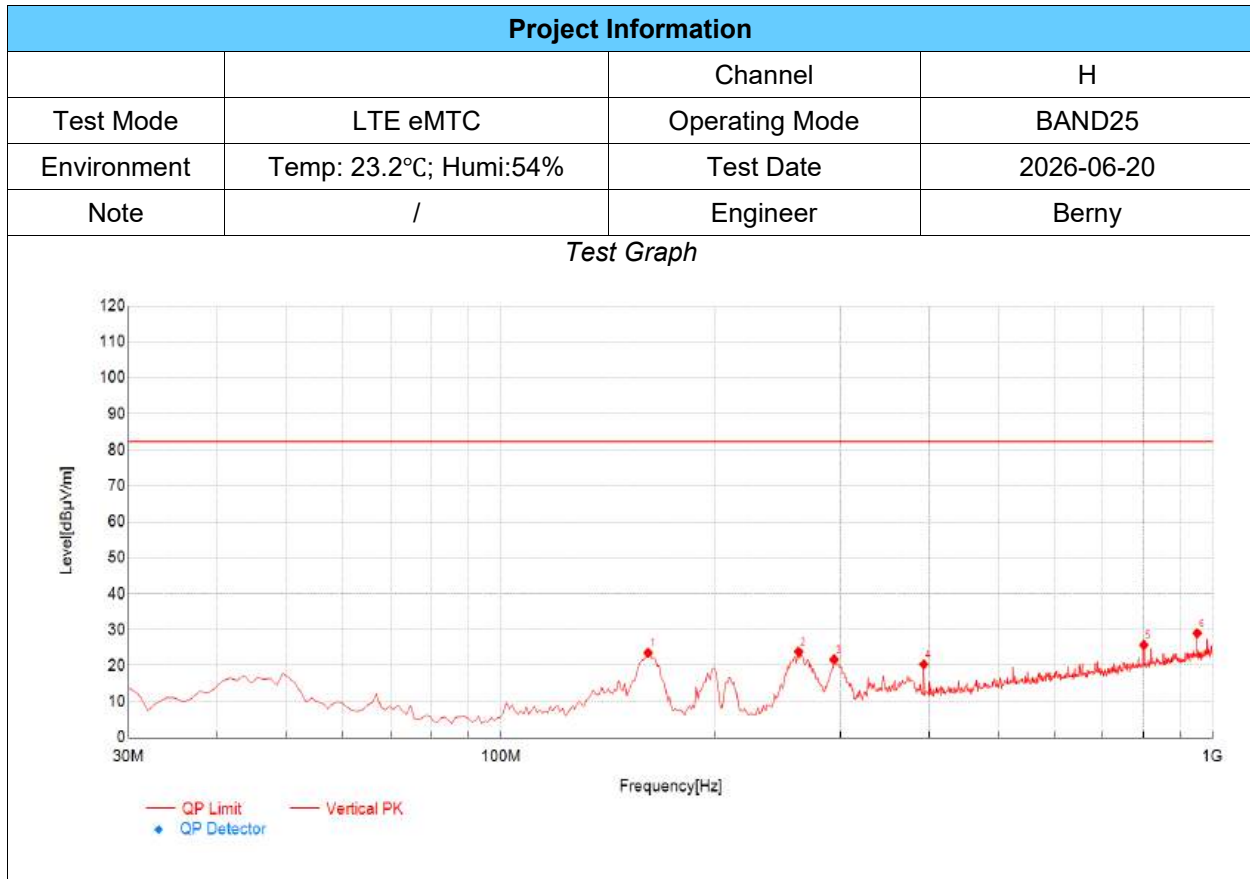

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 160.95          | 41.81          | 23.56          | -18.25        | 82.30          | 58.74       | PK  | Vertical | PASS    |
| 2                   | 261.83          | 43.93          | 23.88          | -20.05        | 82.30          | 58.42       | PK  | Vertical | PASS    |
| 3                   | 293.84          | 40.71          | 21.73          | -18.98        | 82.30          | 60.57       | PK  | Vertical | PASS    |
| 4                   | 392.78          | 36.22          | 20.40          | -15.82        | 82.30          | 61.90       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 33.01          | 25.75          | -7.26         | 82.30          | 56.55       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 33.33          | 29.01          | -4.32         | 82.30          | 53.29       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | H          |
| Test Mode           | LTE eMTC               | Operating Mode | BAND25     |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

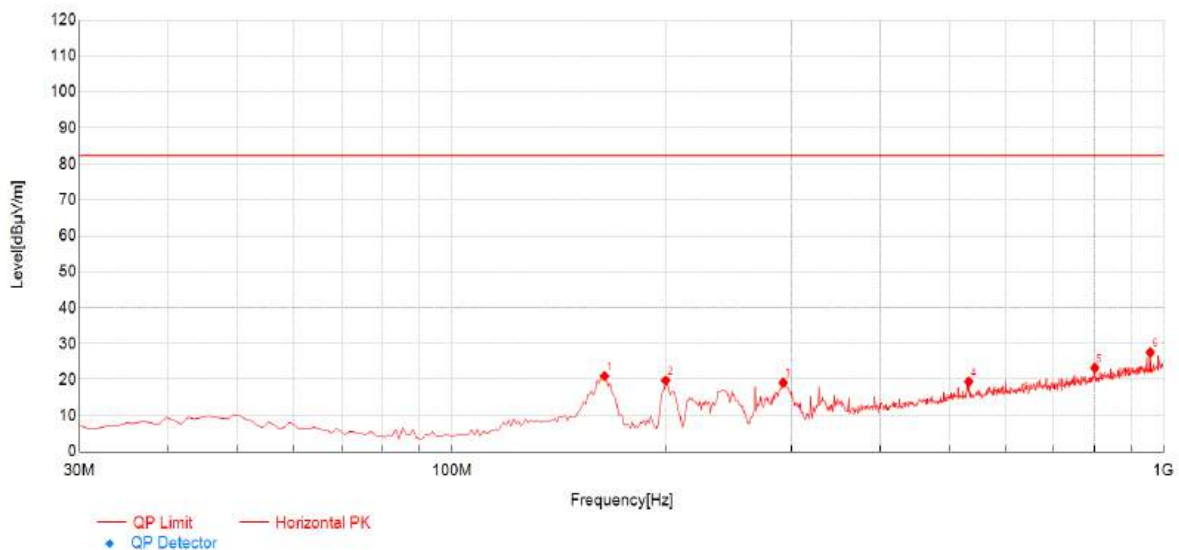


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 163.86          | 39.65          | 21.04          | -18.61        | 82.30          | 61.26       | PK  | Horizontal | PASS    |
| 2                   | 199.75          | 42.08          | 19.76          | -22.32        | 82.30          | 62.54       | PK  | Horizontal | PASS    |
| 3                   | 291.90          | 38.22          | 19.15          | -19.07        | 82.30          | 63.15       | PK  | Horizontal | PASS    |
| 4                   | 532.46          | 31.85          | 19.42          | -12.43        | 82.30          | 62.88       | PK  | Horizontal | PASS    |
| 5                   | 800.18          | 30.55          | 23.29          | -7.26         | 82.30          | 59.01       | PK  | Horizontal | PASS    |
| 6                   | 957.32          | 31.93          | 27.59          | -4.34         | 82.30          | 54.71       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

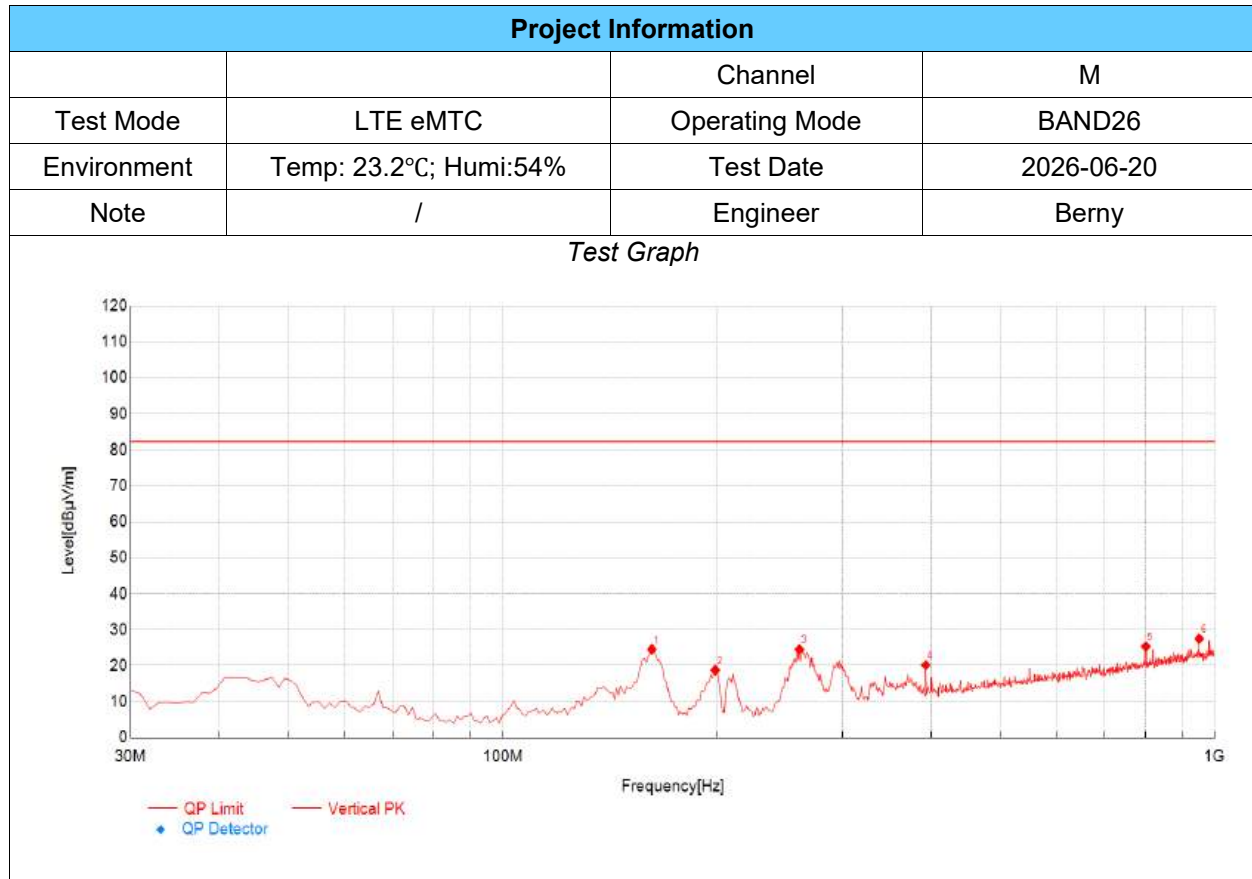


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 161.92          | 42.88          | 24.52          | -18.36        | 82.30          | 57.78       | PK  | Vertical | PASS    |
| 2                   | 198.78          | 41.05          | 18.77          | -22.28        | 82.30          | 63.53       | PK  | Vertical | PASS    |
| 3                   | 260.86          | 44.60          | 24.55          | -20.05        | 82.30          | 57.75       | PK  | Vertical | PASS    |
| 4                   | 392.78          | 35.98          | 20.16          | -15.82        | 82.30          | 62.14       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 32.60          | 25.34          | -7.26         | 82.30          | 56.96       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 31.83          | 27.51          | -4.32         | 82.30          | 54.79       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

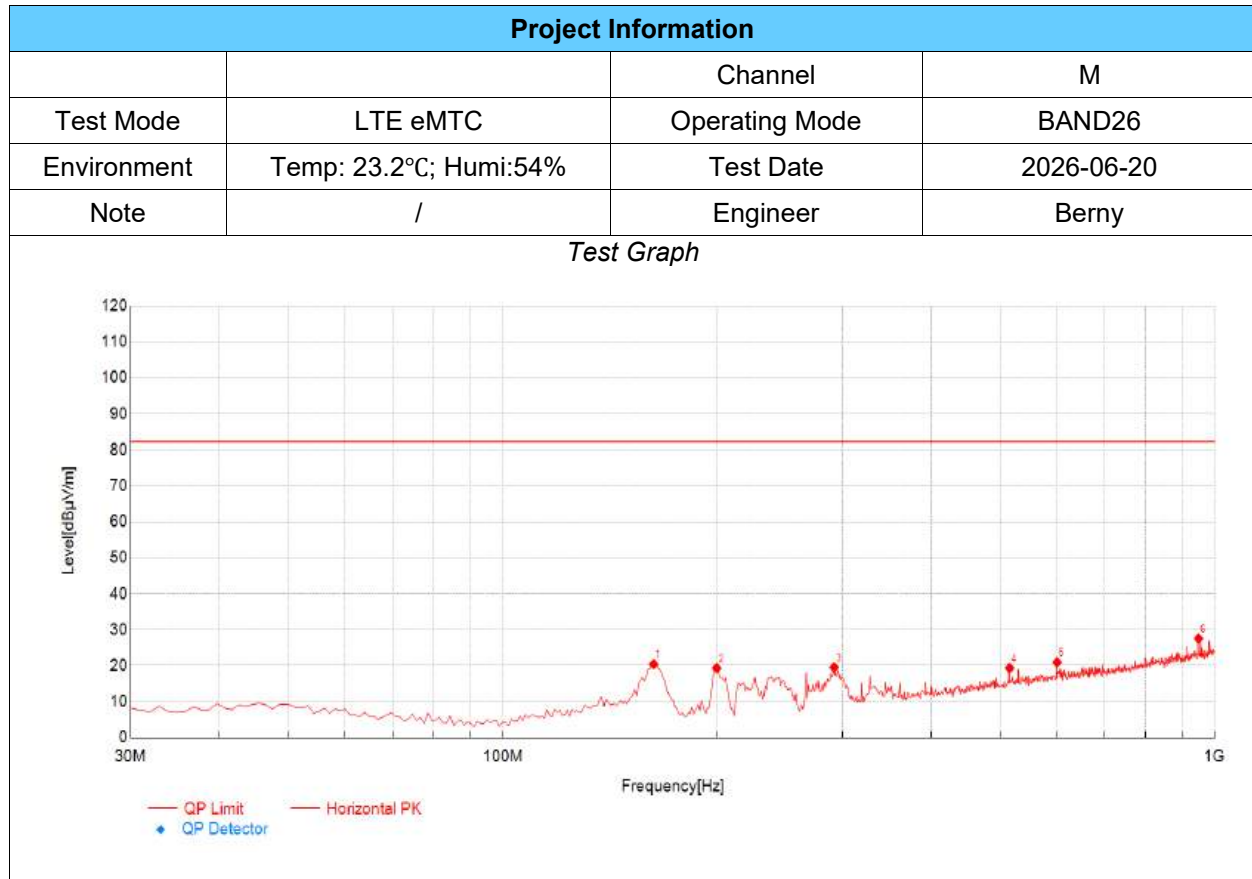


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 162.89          | 38.91          | 20.43          | -18.48        | 82.30          | 61.87       | PK  | Horizontal | PASS    |
| 2                   | 199.75          | 41.61          | 19.29          | -22.32        | 82.30          | 63.01       | PK  | Horizontal | PASS    |
| 3                   | 291.90          | 38.57          | 19.50          | -19.07        | 82.30          | 62.80       | PK  | Horizontal | PASS    |
| 4                   | 515.00          | 32.14          | 19.32          | -12.82        | 82.30          | 62.98       | PK  | Horizontal | PASS    |
| 5                   | 600.36          | 31.72          | 20.93          | -10.79        | 82.30          | 61.37       | PK  | Horizontal | PASS    |
| 6                   | 948.59          | 31.88          | 27.58          | -4.30         | 82.30          | 54.72       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

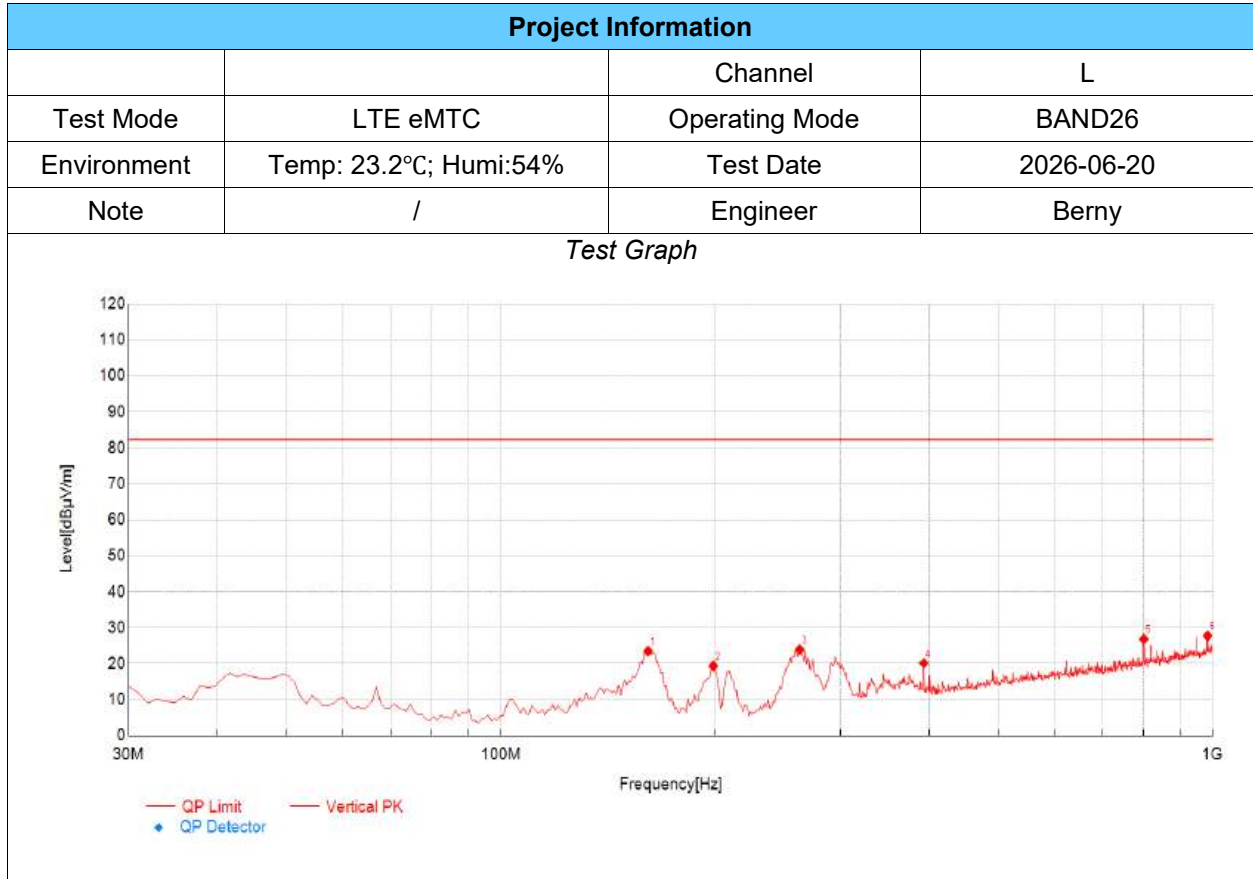

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 160.95          | 41.74          | 23.49          | -18.25        | 82.30          | 58.81       | PK  | Vertical | PASS    |
| 2                   | 198.78          | 41.61          | 19.33          | -22.28        | 82.30          | 62.97       | PK  | Vertical | PASS    |
| 3                   | 262.80          | 43.91          | 23.91          | -20.00        | 82.30          | 58.39       | PK  | Vertical | PASS    |
| 4                   | 392.78          | 35.97          | 20.15          | -15.82        | 82.30          | 62.15       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 34.10          | 26.84          | -7.26         | 82.30          | 55.46       | PK  | Vertical | PASS    |
| 6                   | 983.51          | 31.72          | 27.75          | -3.97         | 82.30          | 54.55       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

## TX Radiated Test Result

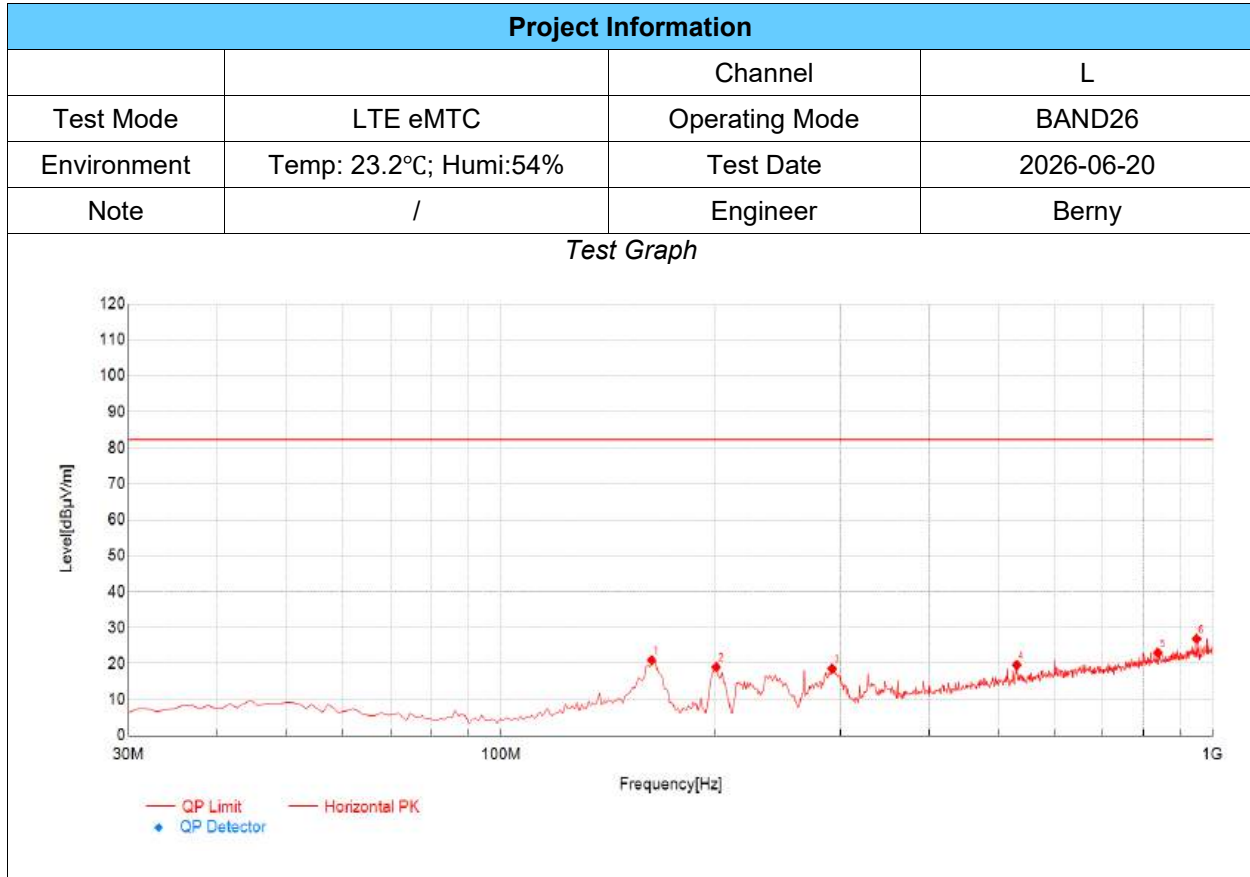

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 162.89          | 39.46          | 20.98          | -18.48        | 82.30          | 61.32       | PK  | Horizontal | PASS    |
| 2                   | 200.72          | 41.40          | 19.04          | -22.36        | 82.30          | 63.26       | PK  | Horizontal | PASS    |
| 3                   | 291.90          | 37.67          | 18.60          | -19.07        | 82.30          | 63.70       | PK  | Horizontal | PASS    |
| 4                   | 530.52          | 32.08          | 19.61          | -12.47        | 82.30          | 62.69       | PK  | Horizontal | PASS    |
| 5                   | 837.04          | 29.61          | 23.05          | -6.56         | 82.30          | 59.25       | PK  | Horizontal | PASS    |
| 6                   | 948.59          | 31.23          | 26.93          | -4.30         | 82.30          | 55.37       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | H          |
| Test Mode           | LTE eMTC               | Operating Mode | BAND26     |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

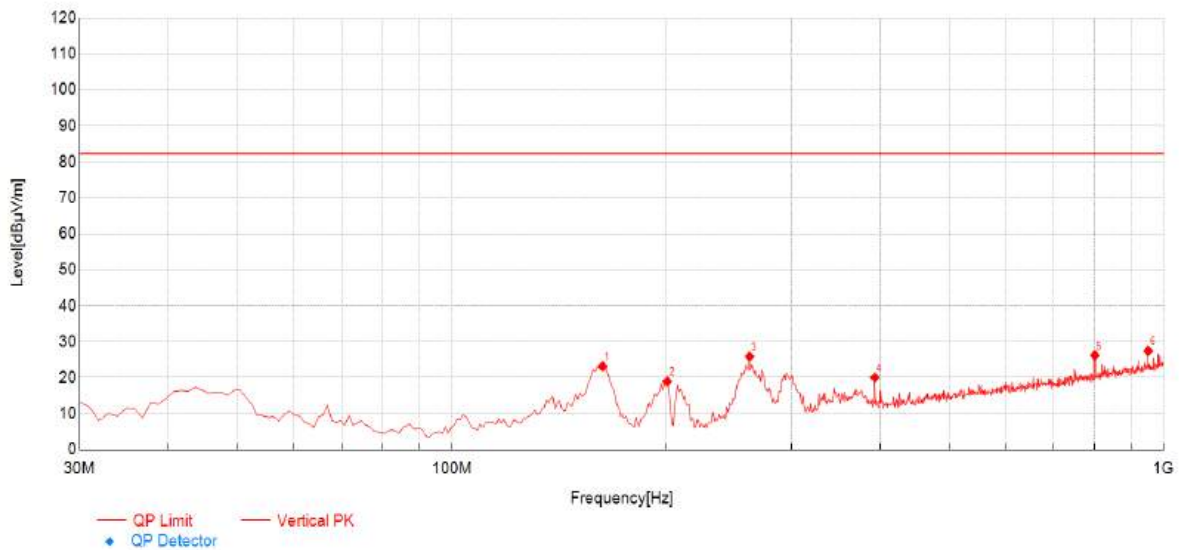


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 162.89          | 41.62          | 23.14          | -18.48        | 82.30          | 59.16       | PK  | Vertical | PASS    |
| 2                   | 200.72          | 41.31          | 18.95          | -22.36        | 82.30          | 63.35       | PK  | Vertical | PASS    |
| 3                   | 261.83          | 45.94          | 25.89          | -20.05        | 82.30          | 56.41       | PK  | Vertical | PASS    |
| 4                   | 392.78          | 35.86          | 20.04          | -15.82        | 82.30          | 62.26       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 33.48          | 26.22          | -7.26         | 82.30          | 56.08       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 31.79          | 27.47          | -4.32         | 82.30          | 54.83       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

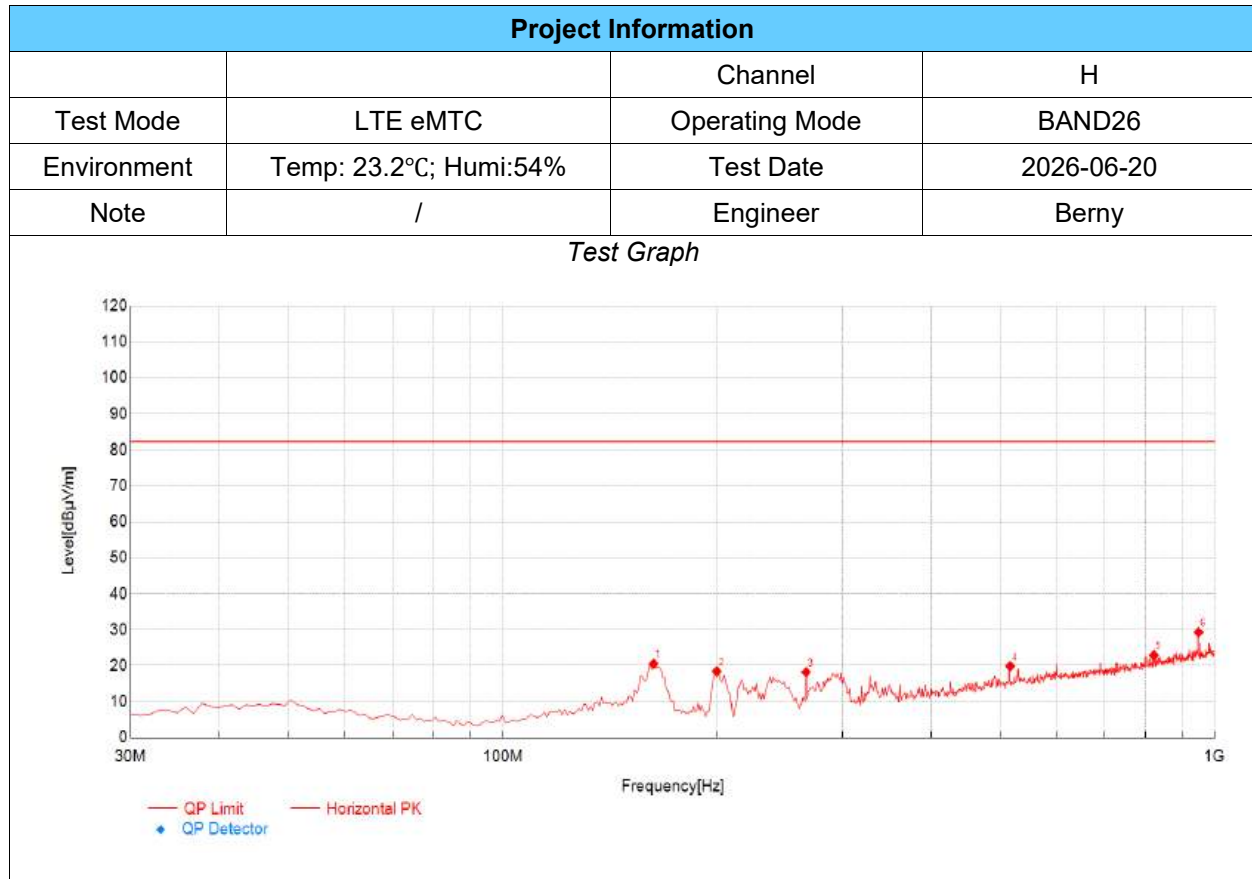


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 162.89          | 39.04          | 20.56          | -18.48        | 82.30          | 61.74       | PK  | Horizontal | PASS    |
| 2                   | 199.75          | 40.74          | 18.42          | -22.32        | 82.30          | 63.88       | PK  | Horizontal | PASS    |
| 3                   | 266.68          | 38.06          | 18.20          | -19.86        | 82.30          | 64.10       | PK  | Horizontal | PASS    |
| 4                   | 515.97          | 32.60          | 19.86          | -12.74        | 82.30          | 62.44       | PK  | Horizontal | PASS    |
| 5                   | 821.52          | 29.78          | 22.92          | -6.86         | 82.30          | 59.38       | PK  | Horizontal | PASS    |
| 6                   | 948.59          | 33.58          | 29.28          | -4.30         | 82.30          | 53.02       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

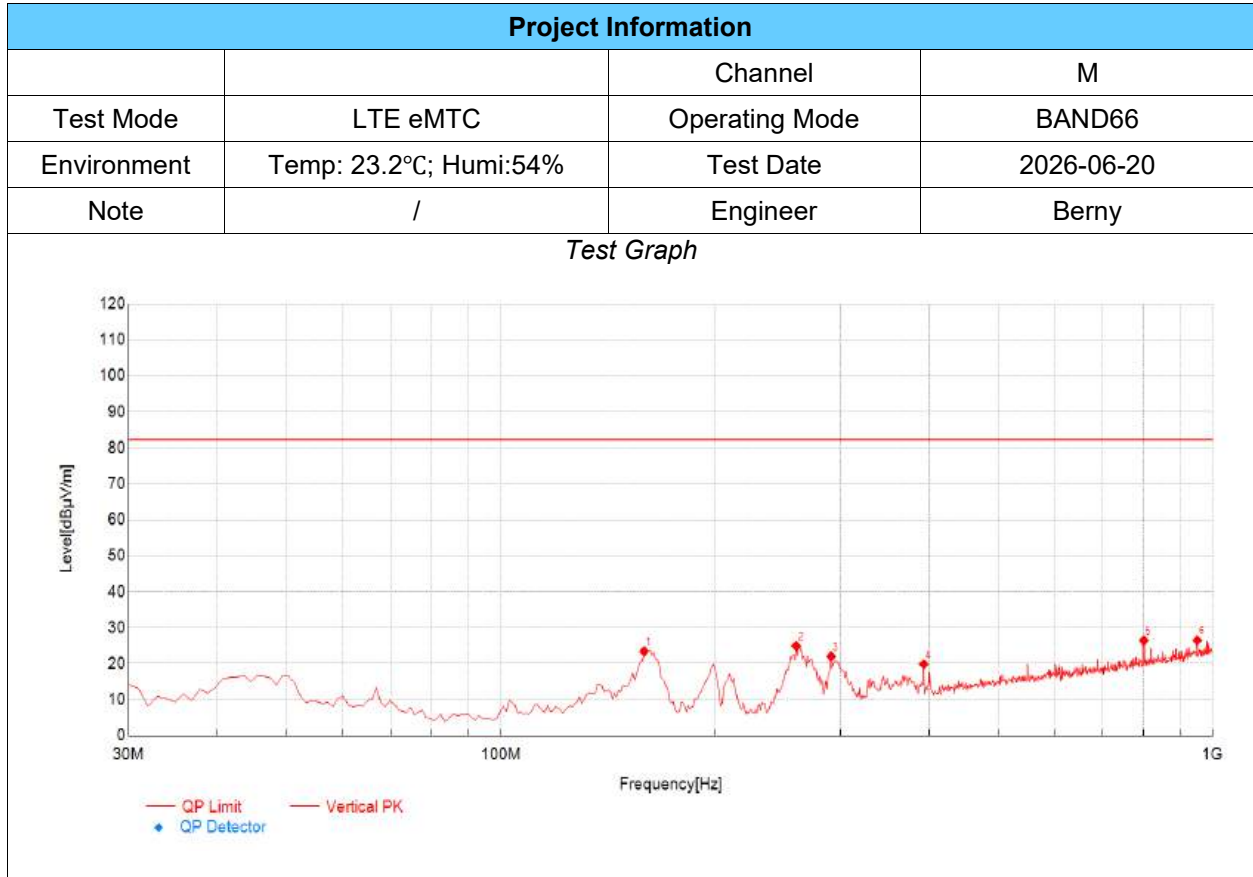

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 159.01          | 41.54          | 23.45          | -18.09        | 82.30          | 58.85       | PK  | Vertical | PASS    |
| 2                   | 259.89          | 44.98          | 24.92          | -20.06        | 82.30          | 57.38       | PK  | Vertical | PASS    |
| 3                   | 290.93          | 41.14          | 22.05          | -19.09        | 82.30          | 60.25       | PK  | Vertical | PASS    |
| 4                   | 392.78          | 35.68          | 19.86          | -15.82        | 82.30          | 62.44       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 33.69          | 26.43          | -7.26         | 82.30          | 55.87       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 30.80          | 26.48          | -4.32         | 82.30          | 55.82       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

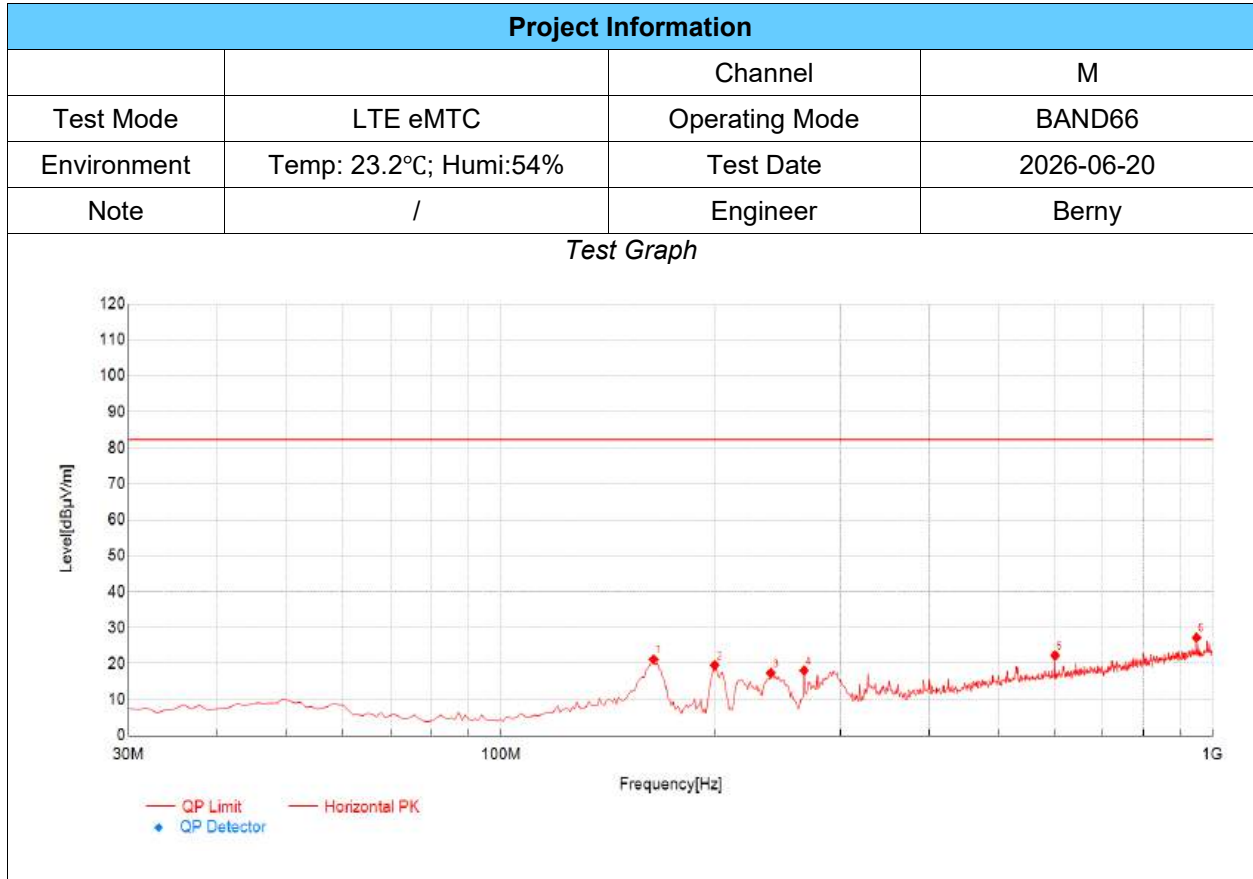


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 163.86          | 39.81          | 21.20          | -18.61        | 82.30          | 61.10       | PK  | Horizontal | PASS    |
| 2                   | 199.75          | 41.88          | 19.56          | -22.32        | 82.30          | 62.74       | PK  | Horizontal | PASS    |
| 3                   | 239.52          | 37.99          | 17.42          | -20.57        | 82.30          | 64.88       | PK  | Horizontal | PASS    |
| 4                   | 266.68          | 37.97          | 18.11          | -19.86        | 82.30          | 64.19       | PK  | Horizontal | PASS    |
| 5                   | 600.36          | 33.09          | 22.30          | -10.79        | 82.30          | 60.00       | PK  | Horizontal | PASS    |
| 6                   | 948.59          | 31.56          | 27.26          | -4.30         | 82.30          | 55.04       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

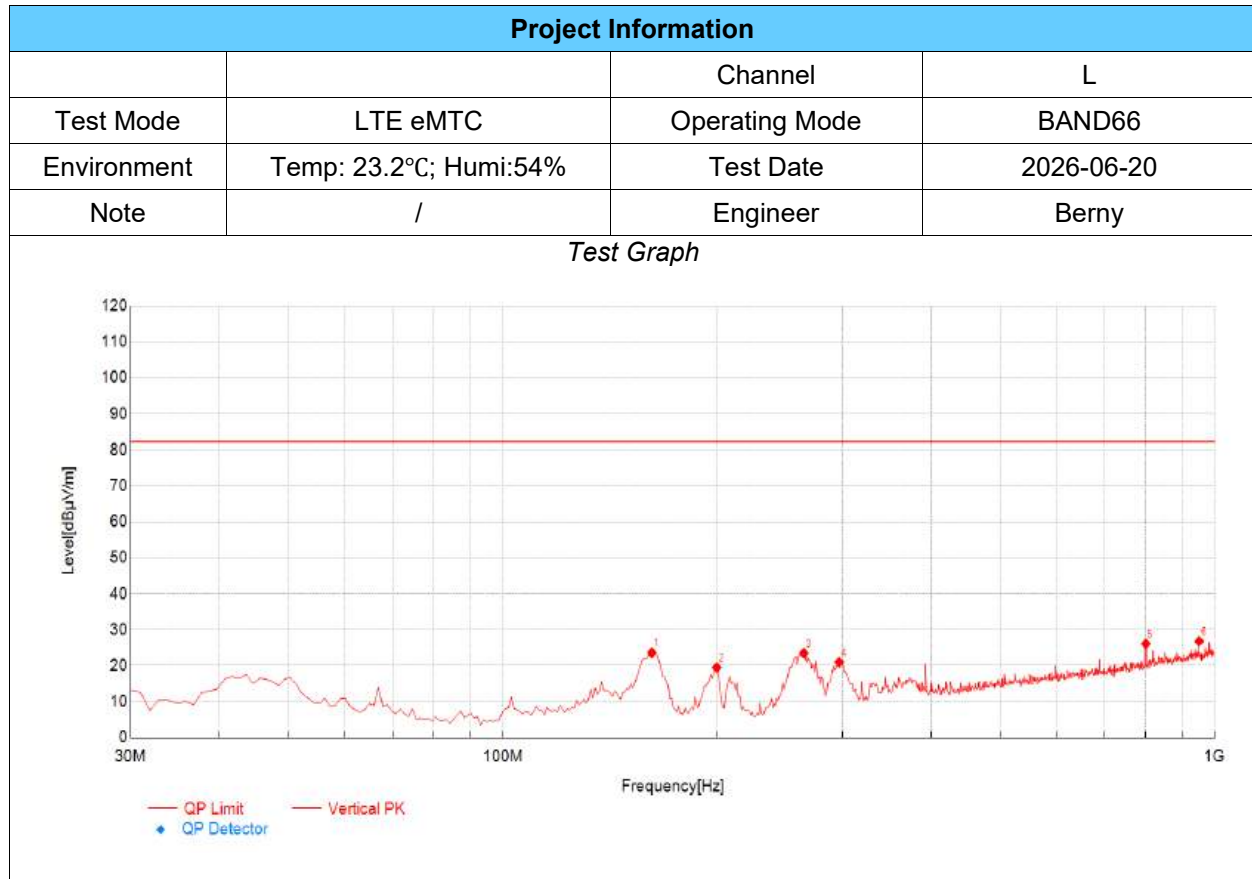


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 161.92          | 41.96          | 23.60          | -18.36        | 82.30          | 58.70       | PK  | Vertical | PASS    |
| 2                   | 199.75          | 41.78          | 19.46          | -22.32        | 82.30          | 62.84       | PK  | Vertical | PASS    |
| 3                   | 264.74          | 43.41          | 23.49          | -19.92        | 82.30          | 58.81       | PK  | Vertical | PASS    |
| 4                   | 296.75          | 39.88          | 21.02          | -18.86        | 82.30          | 61.28       | PK  | Vertical | PASS    |
| 5                   | 800.18          | 33.35          | 26.09          | -7.26         | 82.30          | 56.21       | PK  | Vertical | PASS    |
| 6                   | 950.53          | 31.12          | 26.80          | -4.32         | 82.30          | 55.50       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

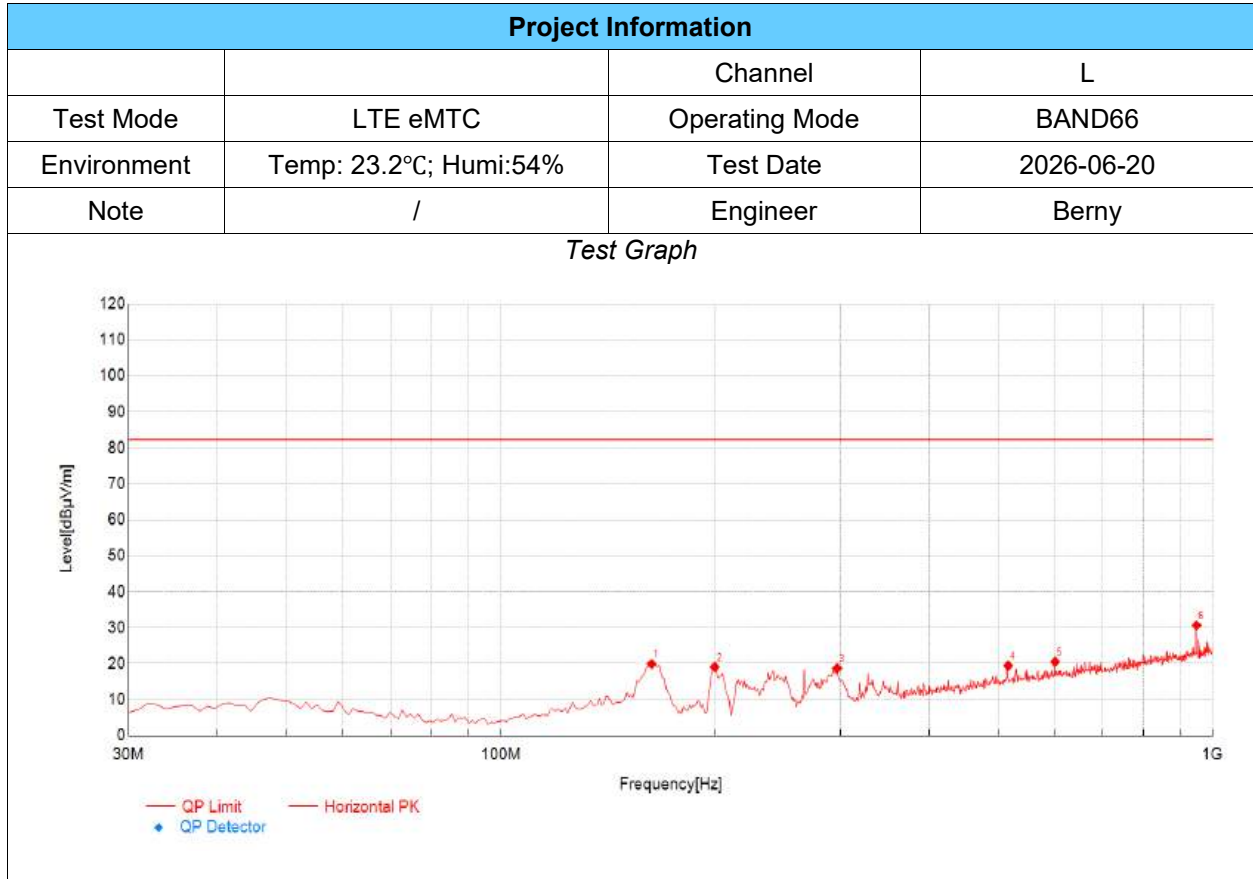

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 162.89          | 38.40          | 19.92          | -18.48        | 82.30          | 62.38       | PK  | Horizontal | PASS    |
| 2                   | 199.75          | 41.38          | 19.06          | -22.32        | 82.30          | 63.24       | PK  | Horizontal | PASS    |
| 3                   | 296.75          | 37.61          | 18.75          | -18.86        | 82.30          | 63.55       | PK  | Horizontal | PASS    |
| 4                   | 515.97          | 32.17          | 19.43          | -12.74        | 82.30          | 62.87       | PK  | Horizontal | PASS    |
| 5                   | 600.36          | 31.32          | 20.53          | -10.79        | 82.30          | 61.77       | PK  | Horizontal | PASS    |
| 6                   | 948.59          | 34.94          | 30.64          | -4.30         | 82.30          | 51.66       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

## TX Radiated Test Result

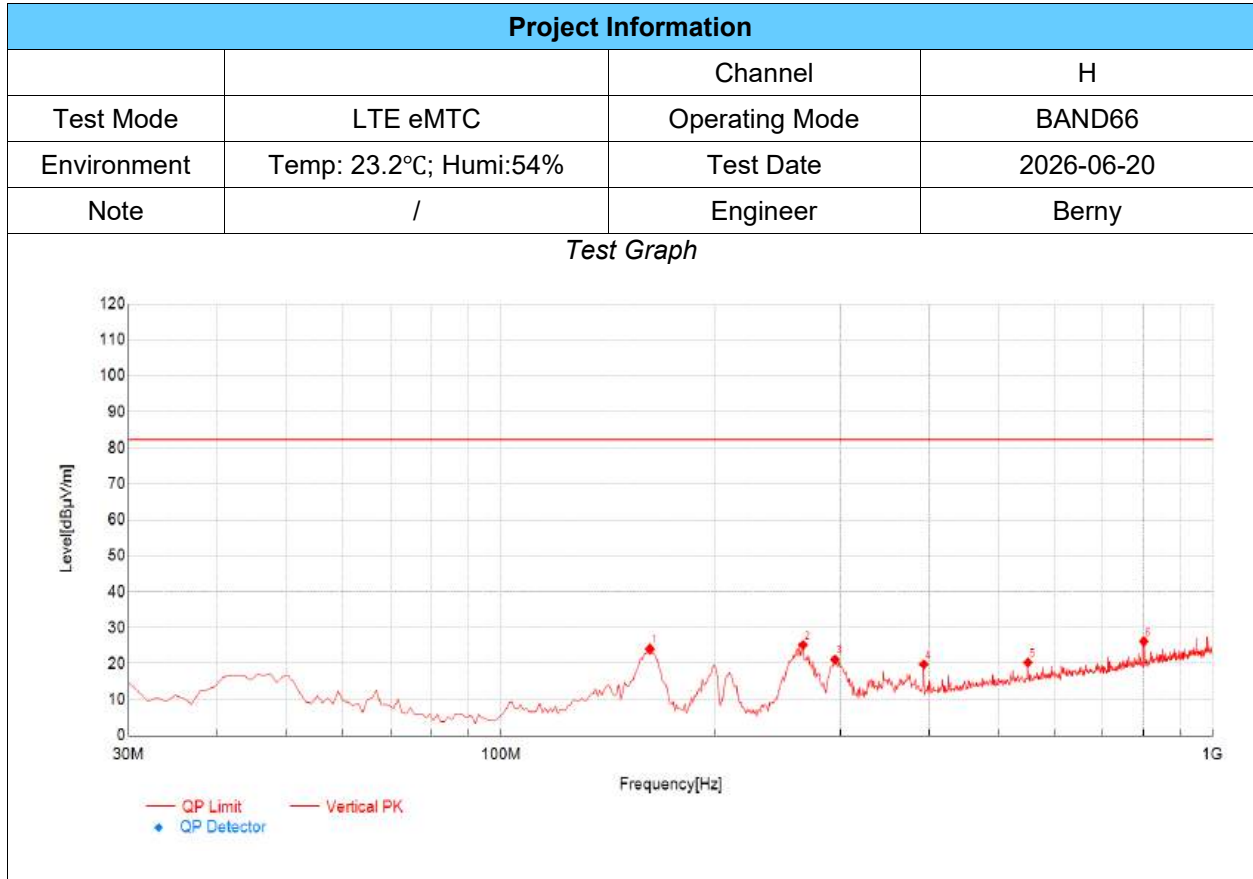


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 161.92          | 42.42          | 24.06          | -18.36        | 82.30          | 58.24       | PK  | Vertical | PASS    |
| 2                   | 265.71          | 45.08          | 25.20          | -19.88        | 82.30          | 57.10       | PK  | Vertical | PASS    |
| 3                   | 294.81          | 40.09          | 21.14          | -18.95        | 82.30          | 61.16       | PK  | Vertical | PASS    |
| 4                   | 392.78          | 35.62          | 19.80          | -15.82        | 82.30          | 62.50       | PK  | Vertical | PASS    |
| 5                   | 549.92          | 32.31          | 20.33          | -11.98        | 82.30          | 61.97       | PK  | Vertical | PASS    |
| 6                   | 800.18          | 33.45          | 26.19          | -7.26         | 82.30          | 56.11       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

All modes have been tested and the worst result as bellow:

## TX Radiated Test Result

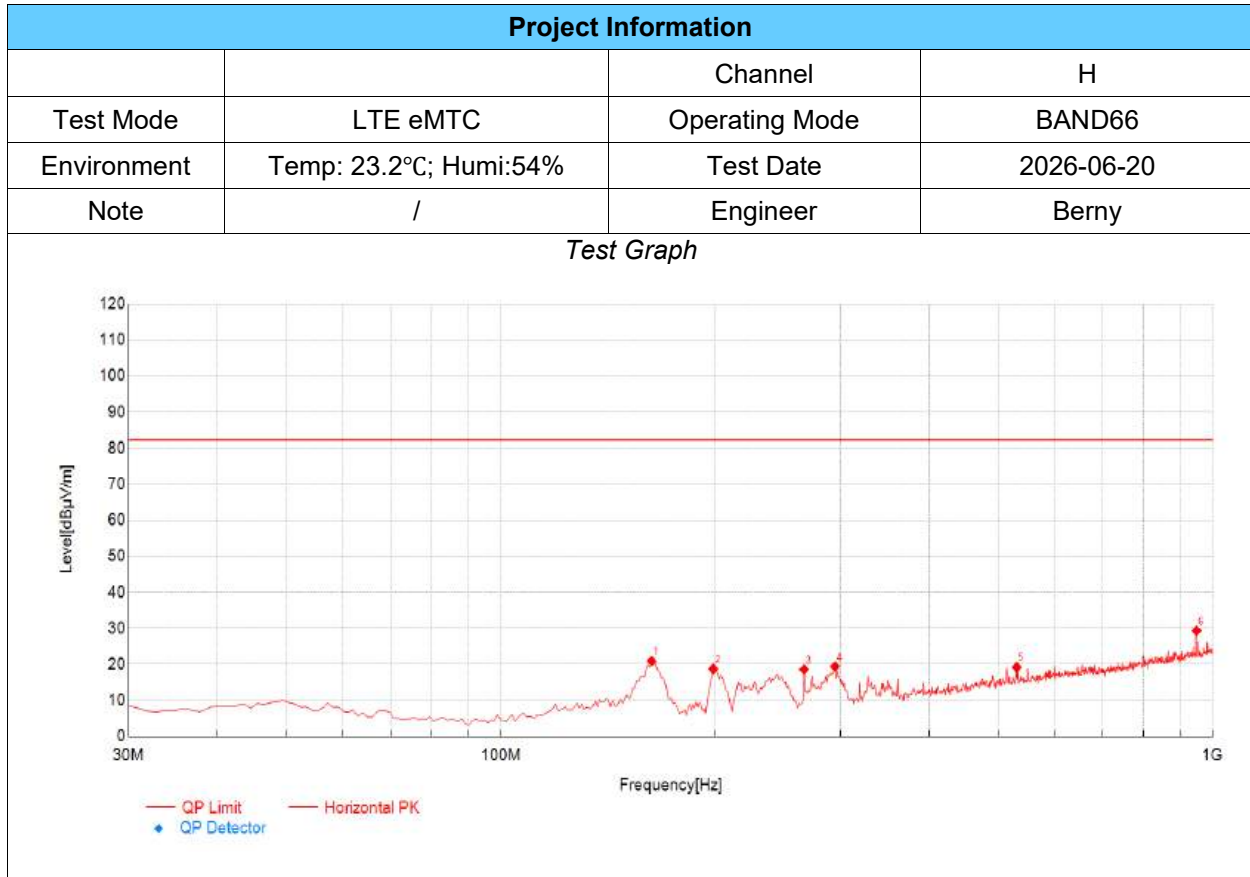


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 162.89          | 39.43          | 20.95          | -18.48        | 82.30          | 61.35       | PK  | Horizontal | PASS    |
| 2                   | 198.78          | 41.02          | 18.74          | -22.28        | 82.30          | 63.56       | PK  | Horizontal | PASS    |
| 3                   | 266.68          | 38.46          | 18.60          | -19.86        | 82.30          | 63.70       | PK  | Horizontal | PASS    |
| 4                   | 294.81          | 38.35          | 19.40          | -18.95        | 82.30          | 62.90       | PK  | Horizontal | PASS    |
| 5                   | 530.52          | 31.65          | 19.18          | -12.47        | 82.30          | 63.12       | PK  | Horizontal | PASS    |
| 6                   | 948.59          | 33.62          | 29.32          | -4.30         | 82.30          | 52.98       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

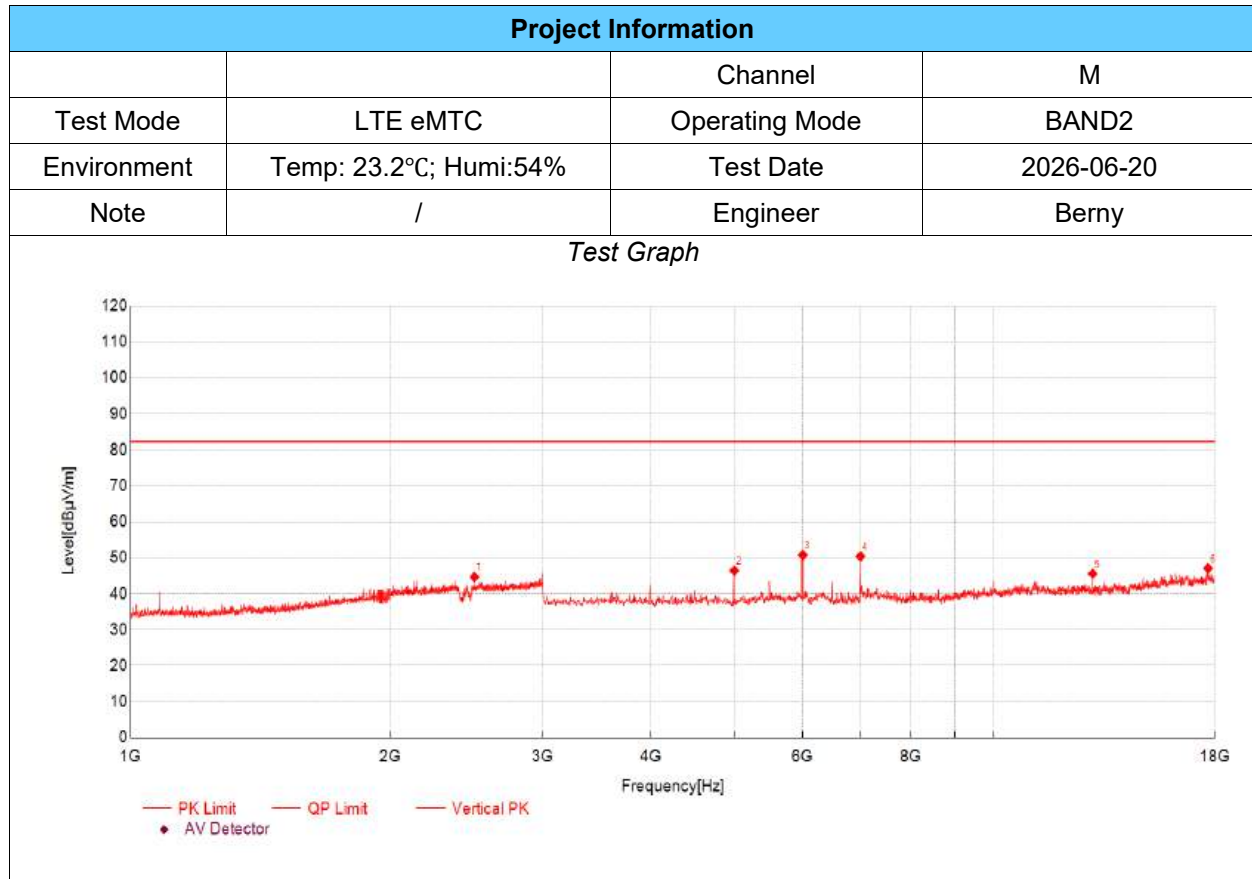


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2500.50         | 53.09          | 44.68          | -8.41         | 82.30          | 37.62       | PK  | Vertical | PASS    |
| 2                   | 5000.67         | 57.58          | 46.40          | -11.18        | 82.30          | 35.90       | PK  | Vertical | PASS    |
| 3                   | 6001.00         | 59.62          | 50.76          | -8.86         | 82.30          | 31.54       | PK  | Vertical | PASS    |
| 4                   | 7001.33         | 58.20          | 50.39          | -7.81         | 82.30          | 31.91       | PK  | Vertical | PASS    |
| 5                   | 12998.33        | 50.09          | 45.55          | -4.54         | 82.30          | 36.75       | PK  | Vertical | PASS    |
| 6                   | 17674.89        | 46.74          | 47.06          | 0.32          | 82.30          | 35.24       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

## TX Radiated Test Result

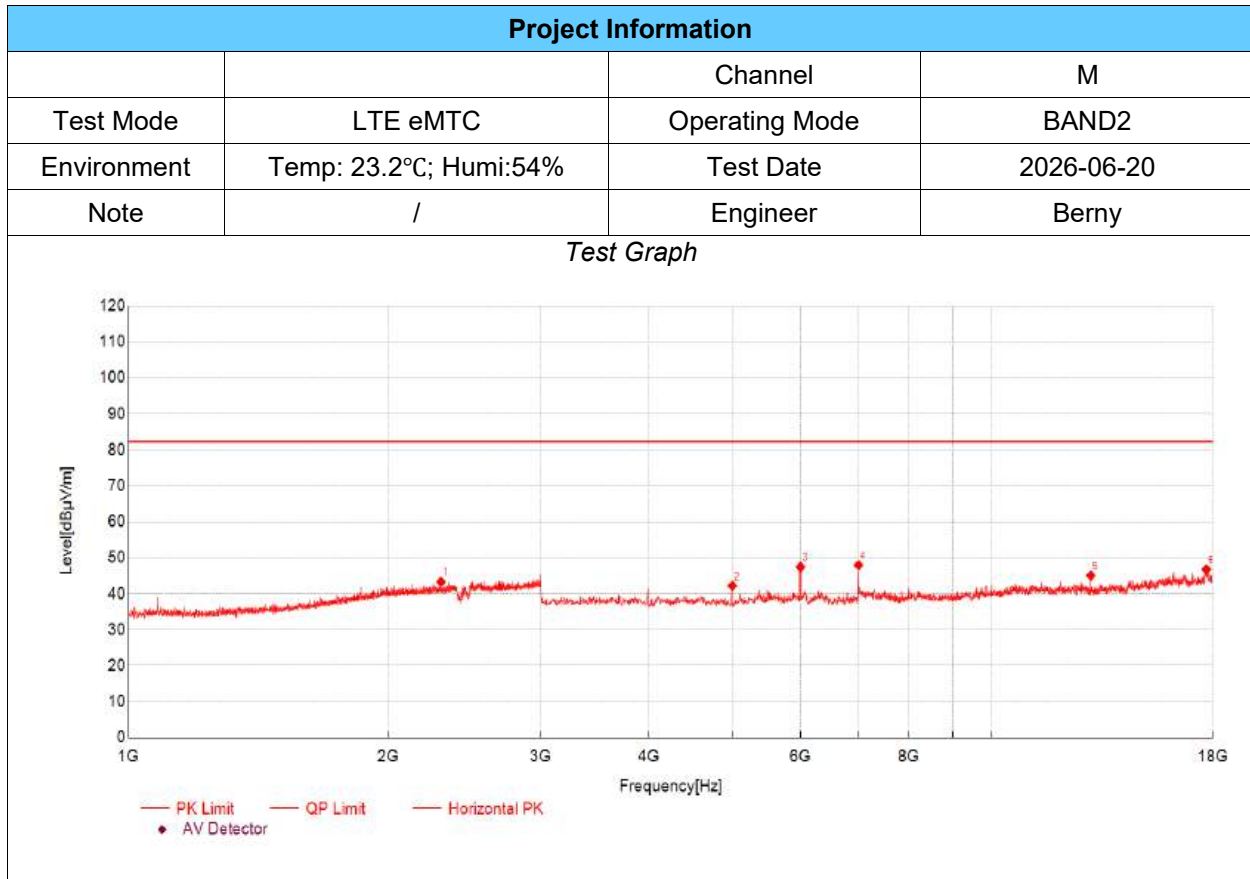


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2299.10         | 52.21          | 43.31          | -8.90         | 82.30          | 38.99       | PK  | Horizontal | PASS    |
| 2                   | 5000.67         | 53.39          | 42.21          | -11.18        | 82.30          | 40.09       | PK  | Horizontal | PASS    |
| 3                   | 5996.00         | 56.35          | 47.44          | -8.91         | 82.30          | 34.86       | PK  | Horizontal | PASS    |
| 4                   | 7001.33         | 55.74          | 47.93          | -7.81         | 82.30          | 34.37       | PK  | Horizontal | PASS    |
| 5                   | 13003.33        | 49.53          | 45.04          | -4.49         | 82.30          | 37.26       | PK  | Horizontal | PASS    |
| 6                   | 17689.90        | 46.51          | 46.74          | 0.23          | 82.30          | 35.56       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

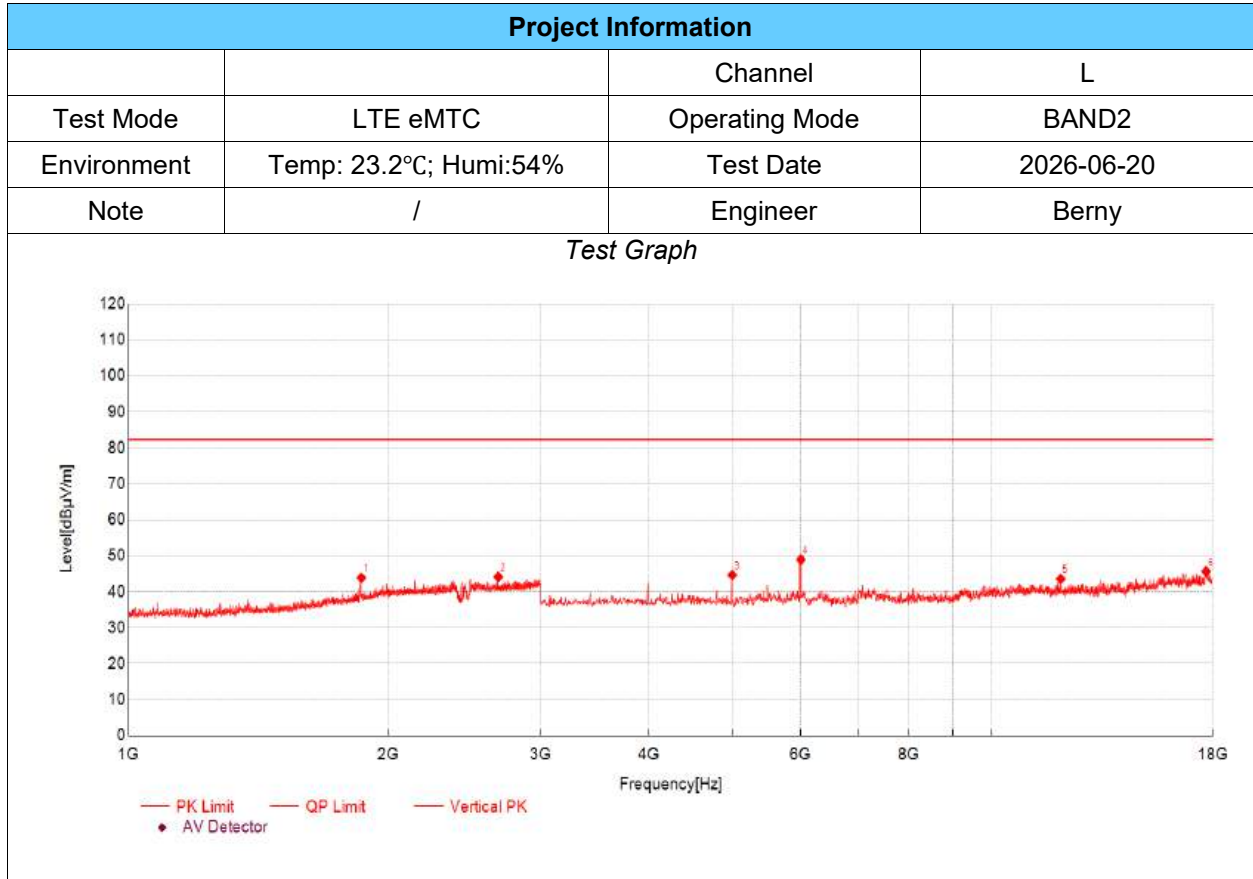

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1859.62         | 54.30          | 43.87          | -10.43        | 82.30          | 38.43       | PK  | Vertical | PASS    |
| 2                   | 2679.23         | 52.49          | 44.13          | -8.36         | 82.30          | 38.17       | PK  | Vertical | PASS    |
| 3                   | 5000.67         | 55.83          | 44.65          | -11.18        | 82.30          | 37.65       | PK  | Vertical | PASS    |
| 4                   | 6001.00         | 57.80          | 48.94          | -8.86         | 82.30          | 33.36       | PK  | Vertical | PASS    |
| 5                   | 11998.00        | 47.88          | 43.57          | -4.31         | 82.30          | 38.73       | PK  | Vertical | PASS    |
| 6                   | 17679.89        | 45.34          | 45.63          | 0.29          | 82.30          | 36.67       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

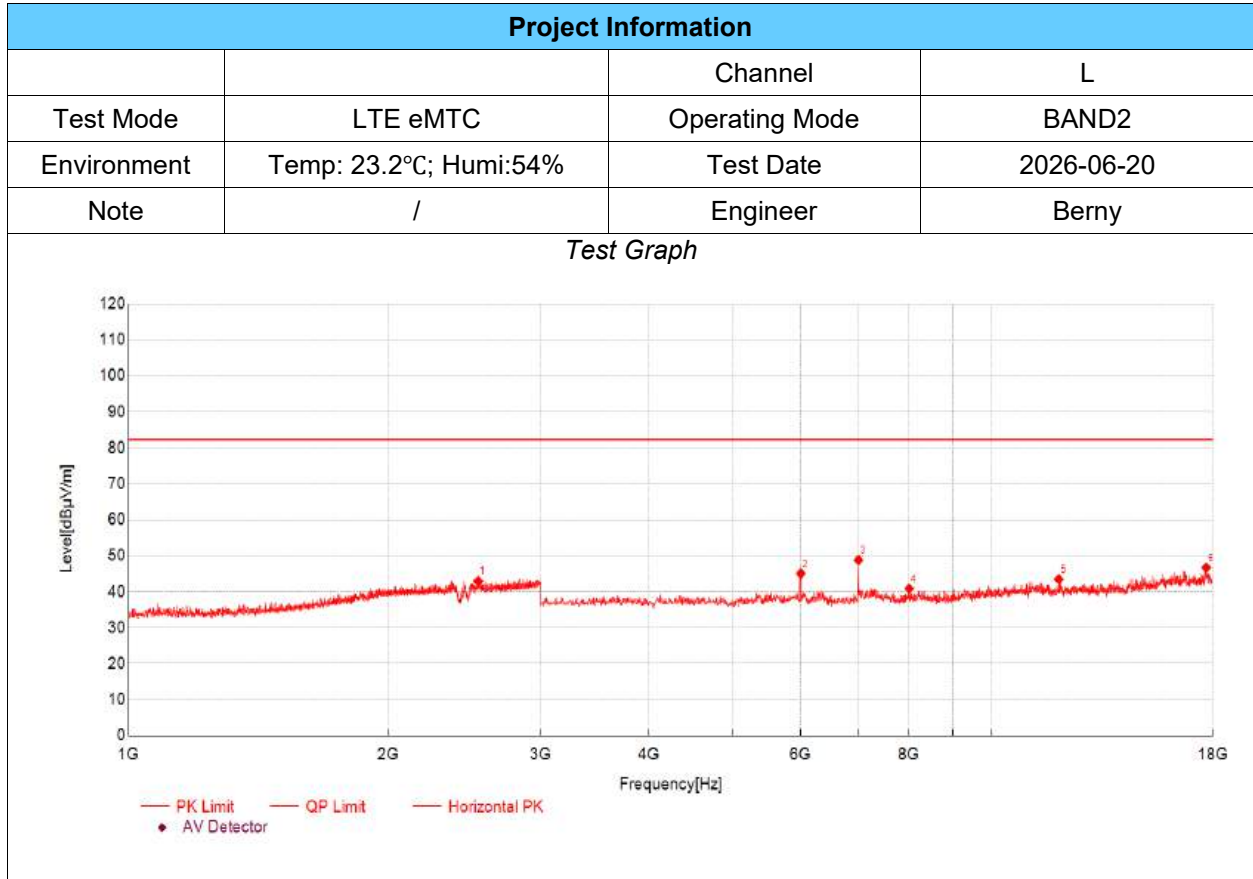


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2539.85         | 51.40          | 42.98          | -8.42         | 82.30          | 39.32       | PK  | Horizontal | PASS    |
| 2                   | 6001.00         | 53.92          | 45.06          | -8.86         | 82.30          | 37.24       | PK  | Horizontal | PASS    |
| 3                   | 7001.33         | 56.64          | 48.83          | -7.81         | 82.30          | 33.47       | PK  | Horizontal | PASS    |
| 4                   | 8011.67         | 48.90          | 40.84          | -8.06         | 82.30          | 41.46       | PK  | Horizontal | PASS    |
| 5                   | 11942.98        | 47.98          | 43.48          | -4.50         | 82.30          | 38.82       | PK  | Horizontal | PASS    |
| 6                   | 17684.89        | 46.43          | 46.69          | 0.26          | 82.30          | 35.61       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

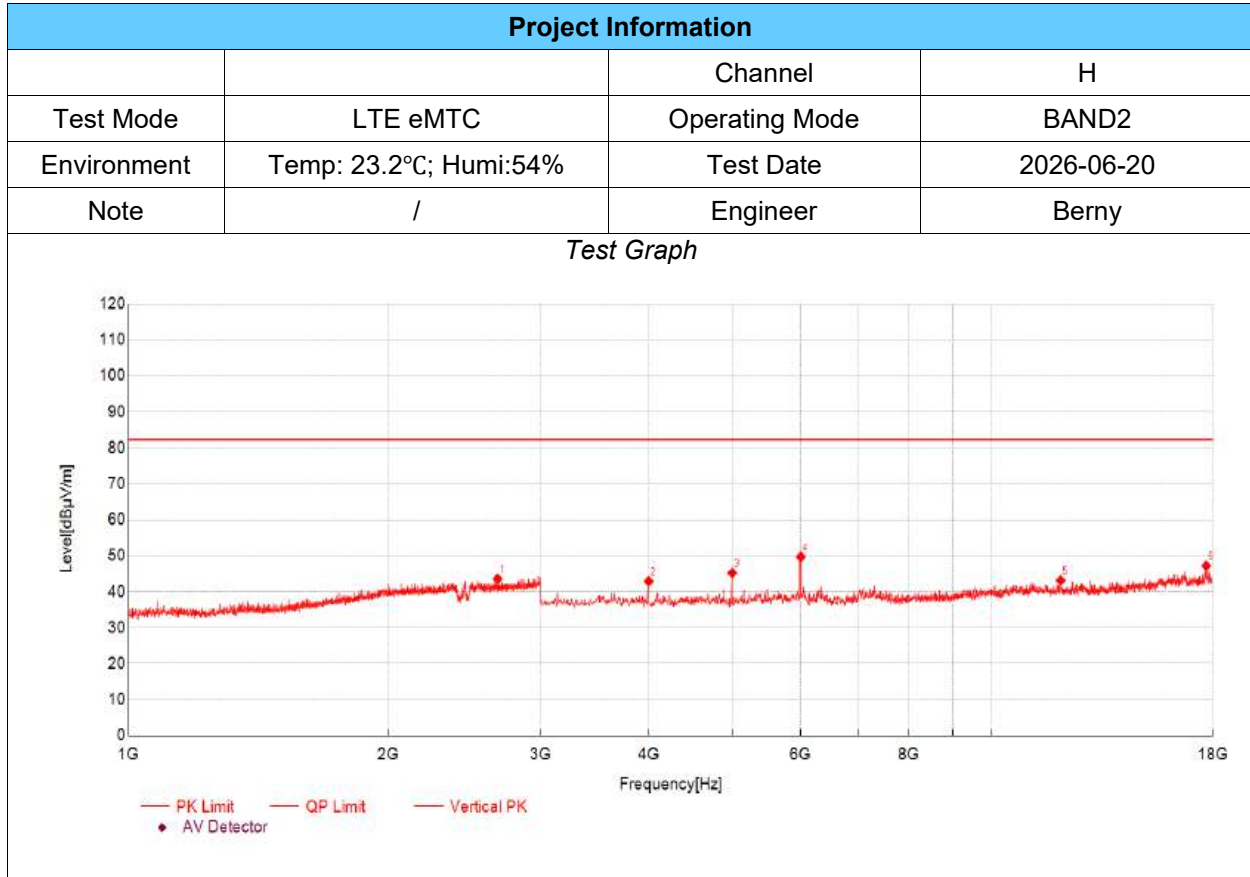


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2673.89         | 52.03          | 43.58          | -8.45         | 82.30          | 38.72       | PK  | Vertical | PASS    |
| 2                   | 4000.33         | 56.27          | 42.92          | -13.35        | 82.30          | 39.38       | PK  | Vertical | PASS    |
| 3                   | 5000.67         | 56.37          | 45.19          | -11.18        | 82.30          | 37.11       | PK  | Vertical | PASS    |
| 4                   | 6001.00         | 58.57          | 49.71          | -8.86         | 82.30          | 32.59       | PK  | Vertical | PASS    |
| 5                   | 11998.00        | 47.49          | 43.18          | -4.31         | 82.30          | 39.12       | PK  | Vertical | PASS    |
| 6                   | 17684.89        | 46.93          | 47.19          | 0.26          | 82.30          | 35.11       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

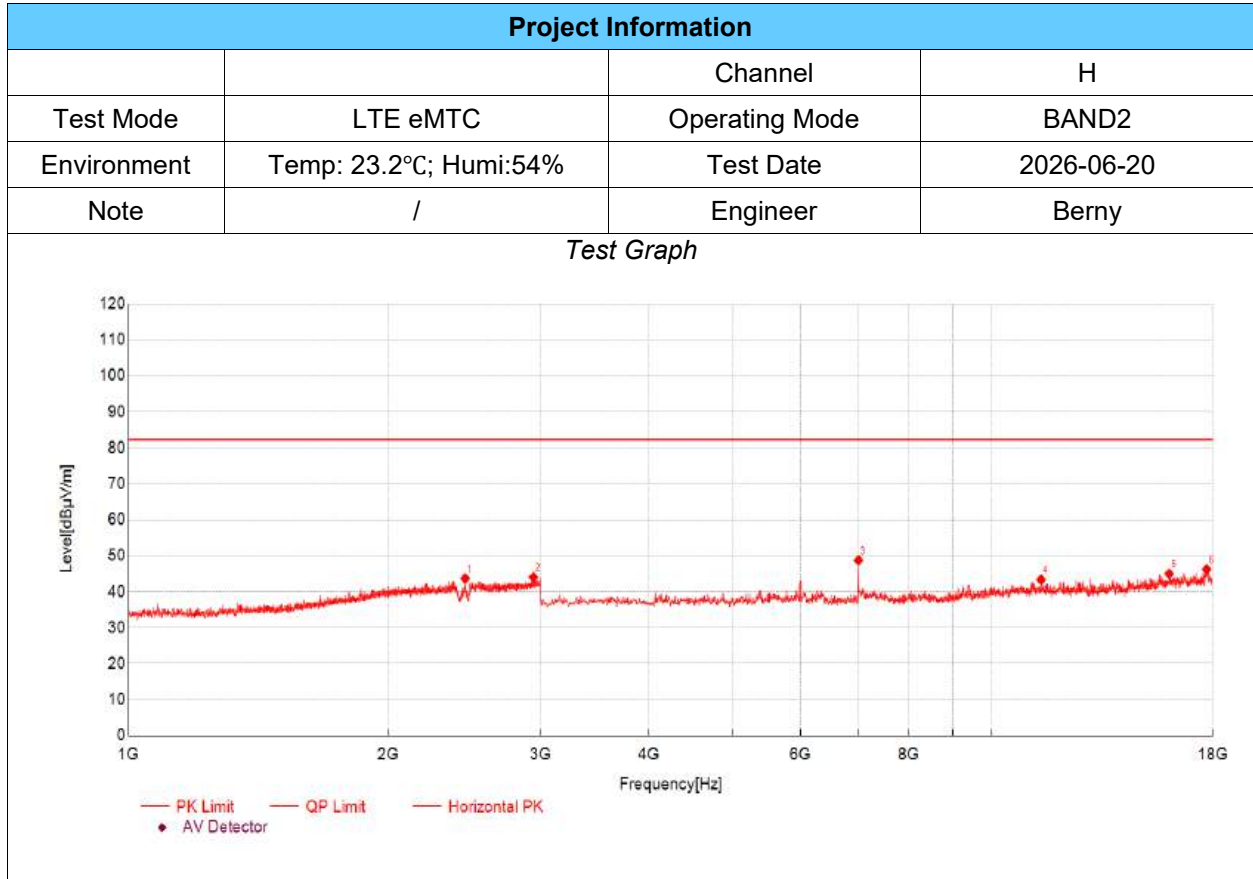

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2452.48         | 52.17          | 43.70          | -8.47         | 82.30          | 38.60       | PK  | Horizontal | PASS    |
| 2                   | 2943.31         | 51.52          | 44.06          | -7.46         | 82.30          | 38.24       | PK  | Horizontal | PASS    |
| 3                   | 7001.33         | 56.55          | 48.74          | -7.81         | 82.30          | 33.56       | PK  | Horizontal | PASS    |
| 4                   | 11392.80        | 47.61          | 43.37          | -4.24         | 82.30          | 38.93       | PK  | Horizontal | PASS    |
| 5                   | 16029.34        | 46.92          | 44.97          | -1.95         | 82.30          | 37.33       | PK  | Horizontal | PASS    |
| 6                   | 17704.90        | 46.12          | 46.19          | 0.07          | 82.30          | 36.11       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

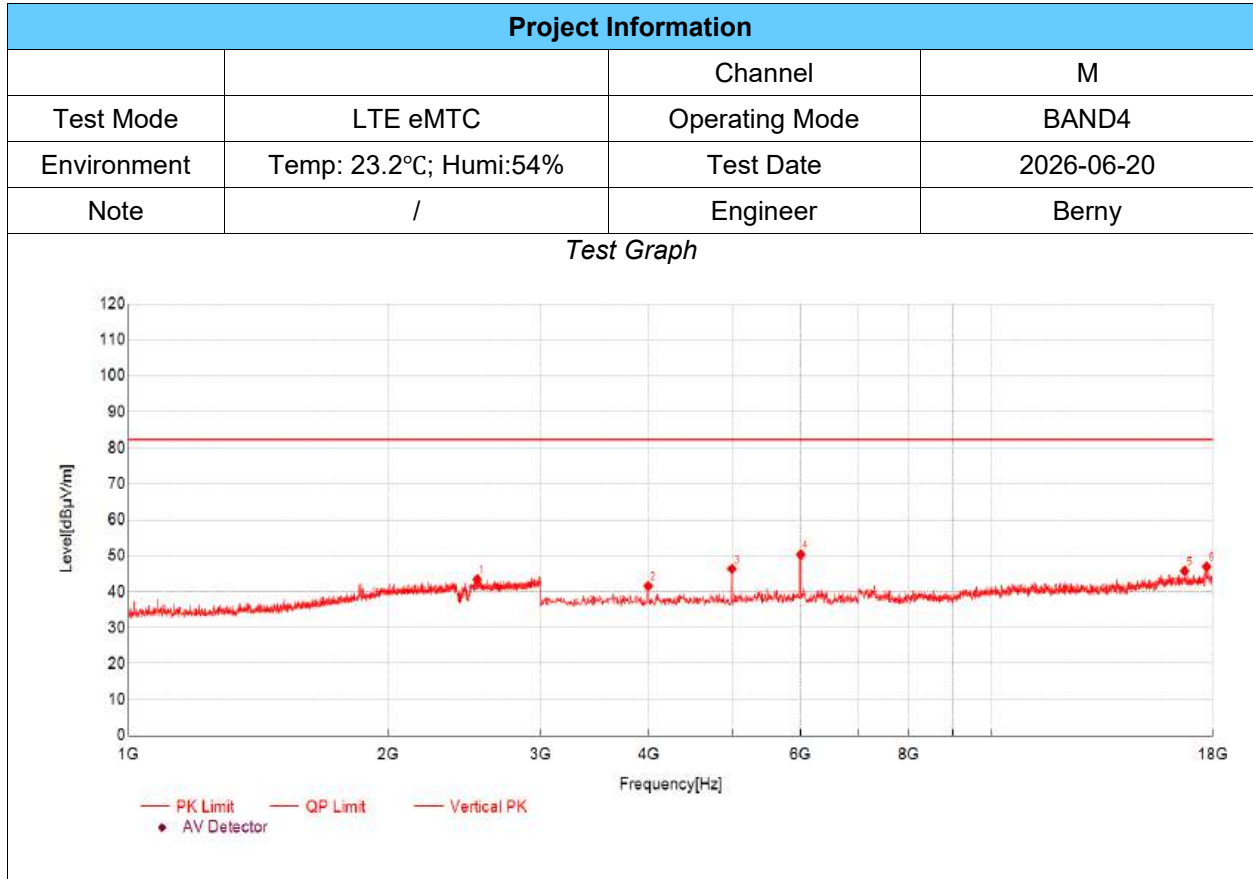

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2534.51         | 52.00          | 43.45          | -8.55         | 82.30          | 38.85       | PK  | Vertical | PASS    |
| 2                   | 3995.33         | 54.89          | 41.58          | -13.31        | 82.30          | 40.72       | PK  | Vertical | PASS    |
| 3                   | 4995.67         | 57.49          | 46.31          | -11.18        | 82.30          | 35.99       | PK  | Vertical | PASS    |
| 4                   | 6001.00         | 59.17          | 50.31          | -8.86         | 82.30          | 31.99       | PK  | Vertical | PASS    |
| 5                   | 16704.57        | 46.39          | 45.75          | -0.64         | 82.30          | 36.55       | PK  | Vertical | PASS    |
| 6                   | 17704.90        | 46.89          | 46.96          | 0.07          | 82.30          | 35.34       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

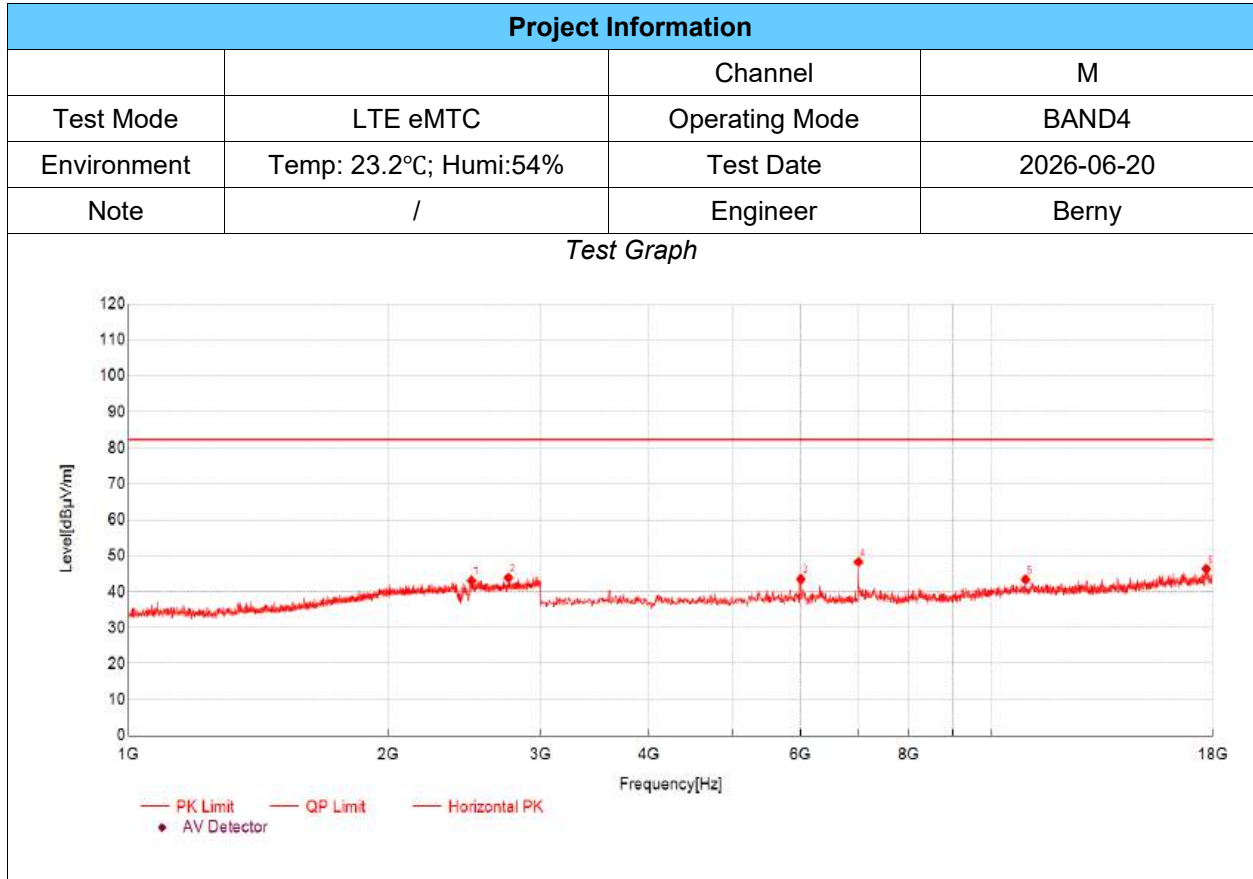


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2493.83         | 51.53          | 43.11          | -8.42         | 82.30          | 39.19       | PK  | Horizontal | PASS    |
| 2                   | 2753.25         | 51.91          | 43.87          | -8.04         | 82.30          | 38.43       | PK  | Horizontal | PASS    |
| 3                   | 6001.00         | 52.39          | 43.53          | -8.86         | 82.30          | 38.77       | PK  | Horizontal | PASS    |
| 4                   | 7001.33         | 56.07          | 48.26          | -7.81         | 82.30          | 34.04       | PK  | Horizontal | PASS    |
| 5                   | 10927.64        | 48.41          | 43.41          | -5.00         | 82.30          | 38.89       | PK  | Horizontal | PASS    |
| 6                   | 17684.89        | 46.05          | 46.31          | 0.26          | 82.30          | 35.99       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

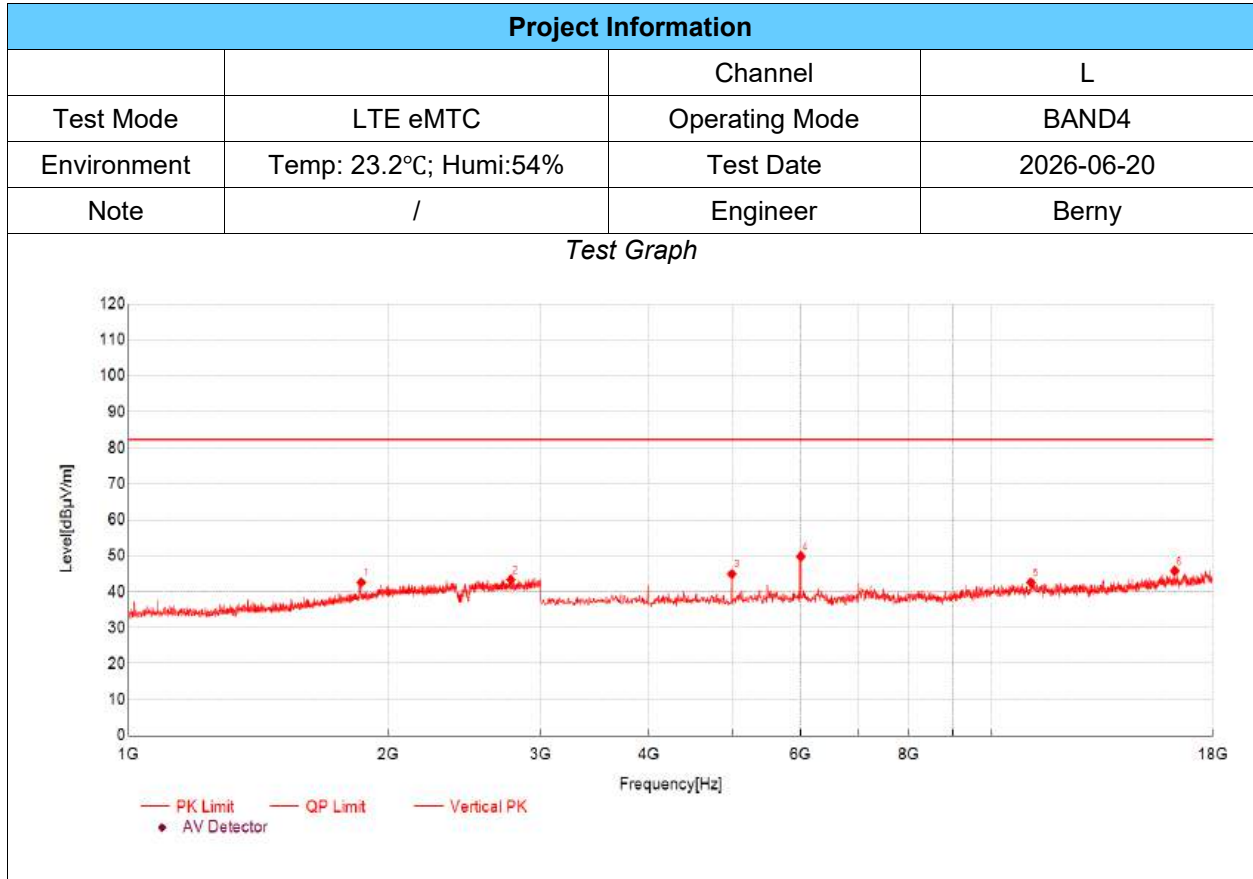


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1858.95         | 52.98          | 42.56          | -10.42        | 82.30          | 39.74       | PK  | Vertical | PASS    |
| 2                   | 2770.59         | 51.63          | 43.39          | -8.24         | 82.30          | 38.91       | PK  | Vertical | PASS    |
| 3                   | 4995.67         | 56.10          | 44.92          | -11.18        | 82.30          | 37.38       | PK  | Vertical | PASS    |
| 4                   | 6001.00         | 58.68          | 49.82          | -8.86         | 82.30          | 32.48       | PK  | Vertical | PASS    |
| 5                   | 11082.69        | 47.11          | 42.58          | -4.53         | 82.30          | 39.72       | PK  | Vertical | PASS    |
| 6                   | 16264.42        | 46.74          | 45.77          | -0.97         | 82.30          | 36.53       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

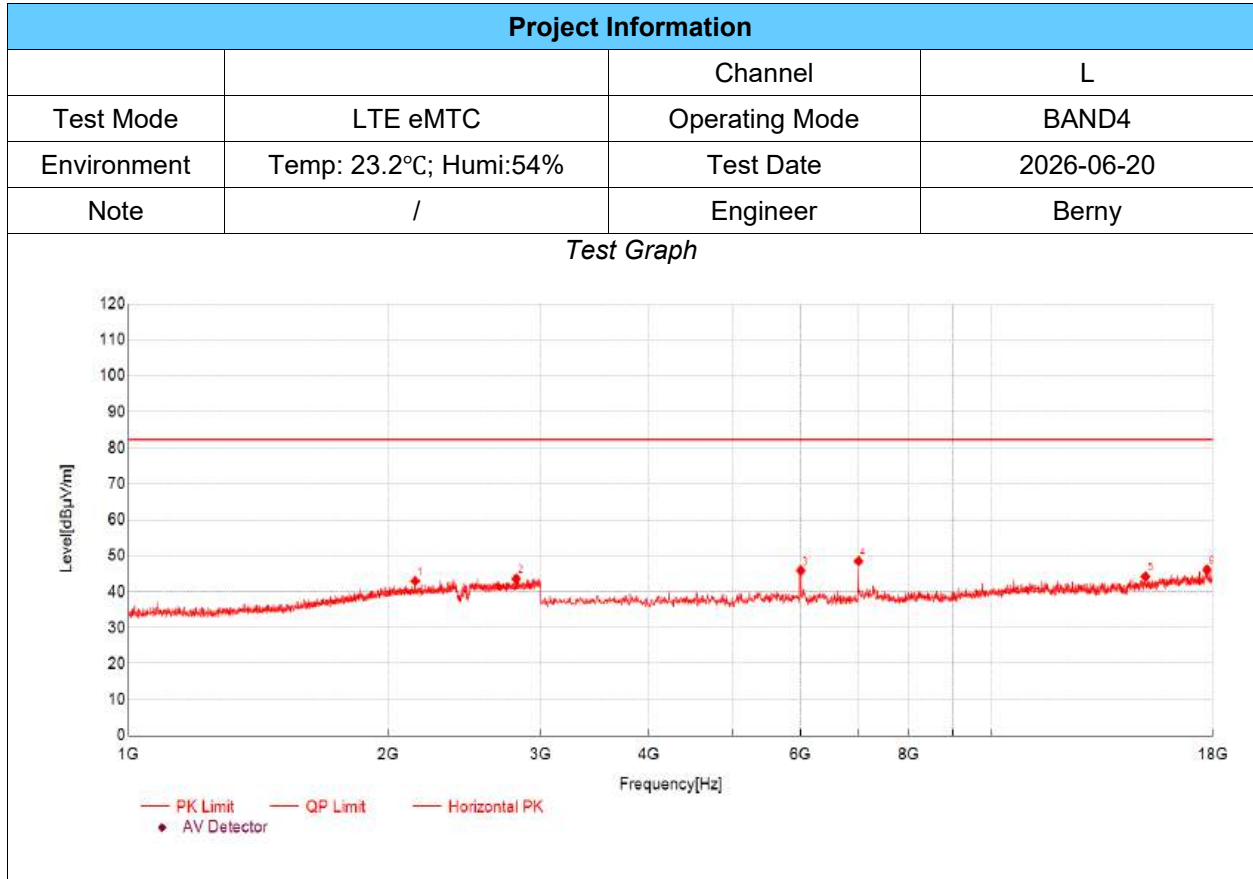


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2147.05         | 52.01          | 42.97          | -9.04         | 82.30          | 39.33       | PK  | Horizontal | PASS    |
| 2                   | 2811.94         | 51.84          | 43.61          | -8.23         | 82.30          | 38.69       | PK  | Horizontal | PASS    |
| 3                   | 6001.00         | 54.73          | 45.87          | -8.86         | 82.30          | 36.43       | PK  | Horizontal | PASS    |
| 4                   | 7001.33         | 56.33          | 48.52          | -7.81         | 82.30          | 33.78       | PK  | Horizontal | PASS    |
| 5                   | 15044.01        | 46.99          | 44.23          | -2.76         | 82.30          | 38.07       | PK  | Horizontal | PASS    |
| 6                   | 17719.91        | 46.31          | 46.06          | -0.25         | 82.30          | 36.24       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

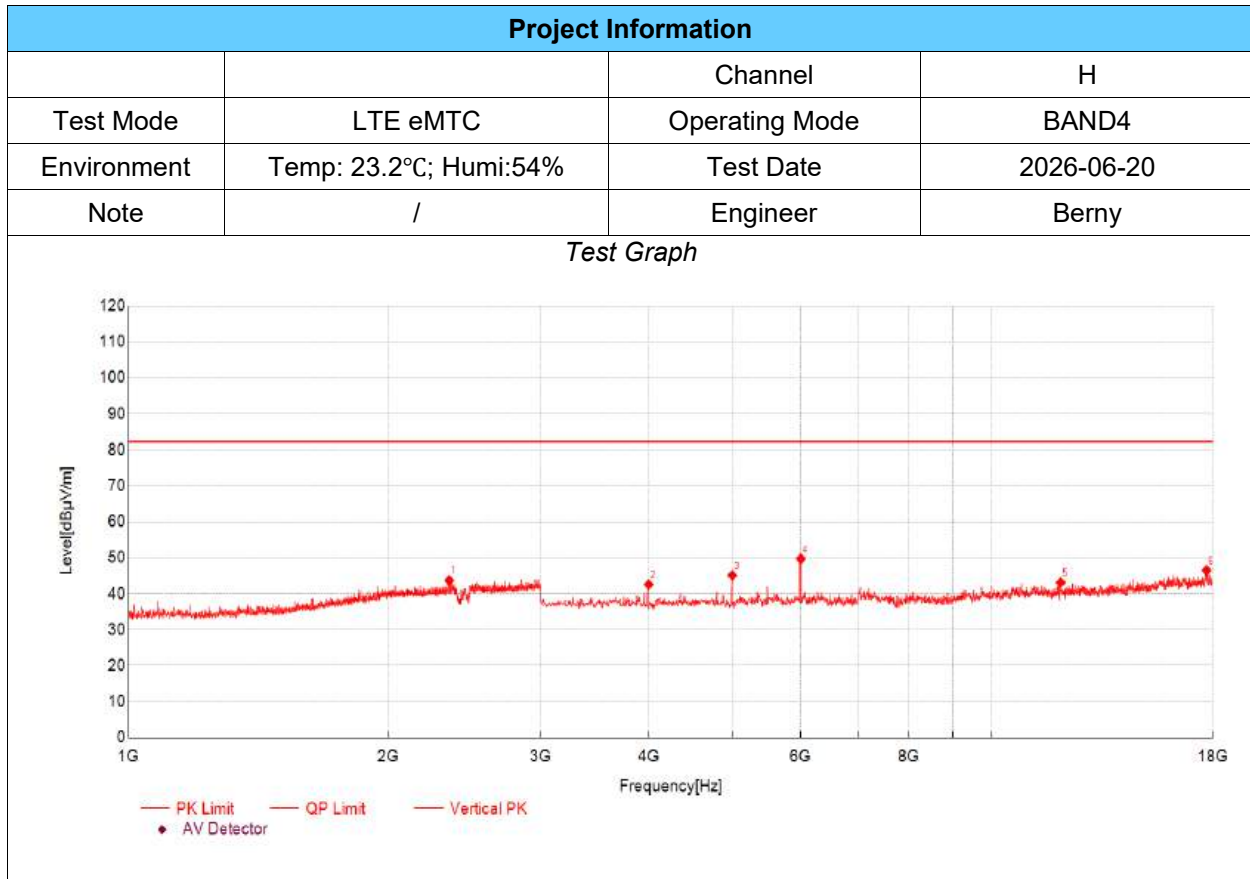


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2349.78         | 52.15          | 43.71          | -8.44         | 82.30          | 38.59       | PK  | Vertical | PASS    |
| 2                   | 4000.33         | 55.91          | 42.56          | -13.35        | 82.30          | 39.74       | PK  | Vertical | PASS    |
| 3                   | 5000.67         | 56.29          | 45.11          | -11.18        | 82.30          | 37.19       | PK  | Vertical | PASS    |
| 4                   | 6001.00         | 58.58          | 49.72          | -8.86         | 82.30          | 32.58       | PK  | Vertical | PASS    |
| 5                   | 11998.00        | 47.46          | 43.15          | -4.31         | 82.30          | 39.15       | PK  | Vertical | PASS    |
| 6                   | 17699.90        | 46.32          | 46.49          | 0.17          | 82.30          | 35.81       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

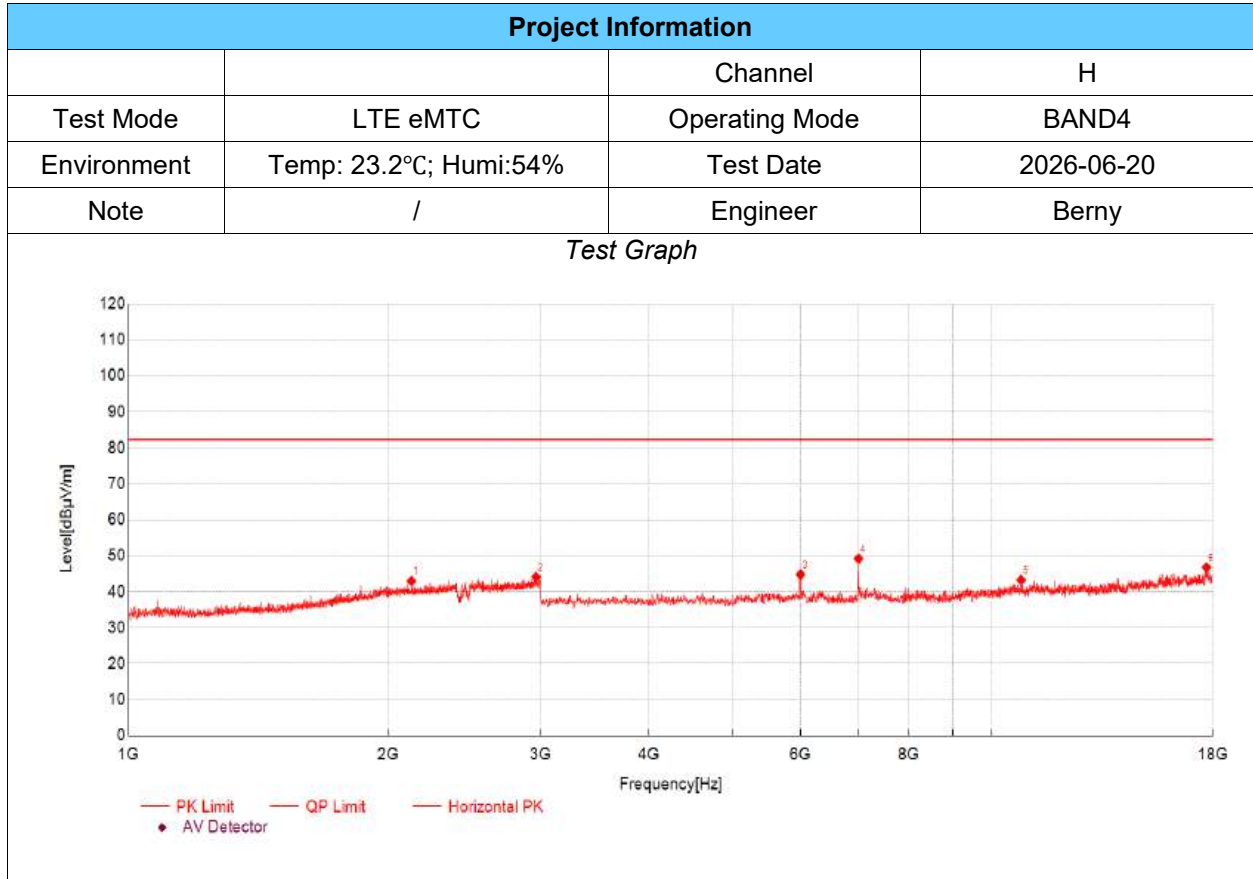

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2125.71         | 52.06          | 42.98          | -9.08         | 82.30          | 39.32       | PK  | Horizontal | PASS    |
| 2                   | 2962.65         | 51.41          | 44.12          | -7.29         | 82.30          | 38.18       | PK  | Horizontal | PASS    |
| 3                   | 5996.00         | 53.70          | 44.79          | -8.91         | 82.30          | 37.51       | PK  | Horizontal | PASS    |
| 4                   | 7001.33         | 57.02          | 49.21          | -7.81         | 82.30          | 33.09       | PK  | Horizontal | PASS    |
| 5                   | 10797.60        | 48.27          | 43.28          | -4.99         | 82.30          | 39.02       | PK  | Horizontal | PASS    |
| 6                   | 17699.90        | 46.58          | 46.75          | 0.17          | 82.30          | 35.55       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

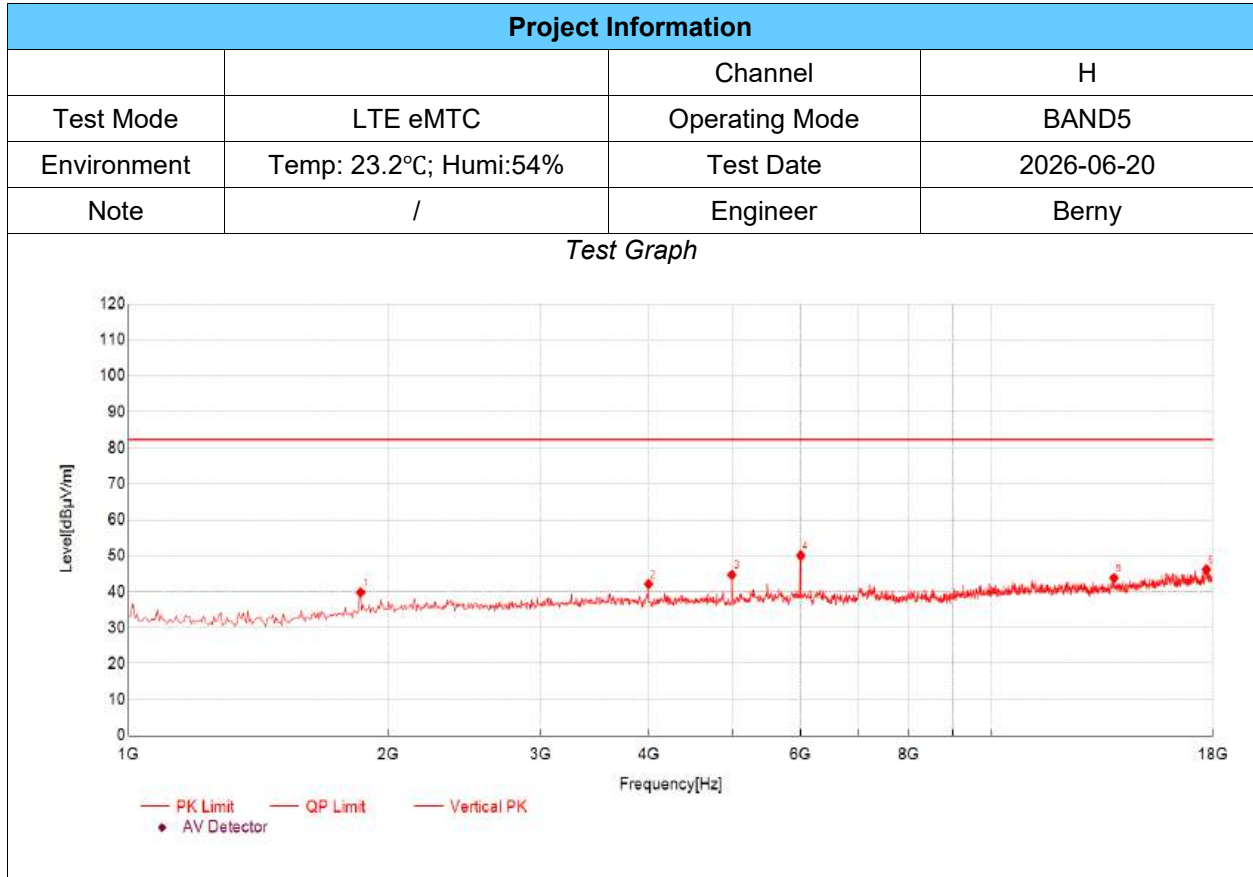


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1855.95         | 59.44          | 39.80          | -19.64        | 82.30          | 42.50       | PK  | Vertical | PASS    |
| 2                   | 3998.67         | 55.43          | 42.13          | -13.30        | 82.30          | 40.17       | PK  | Vertical | PASS    |
| 3                   | 4996.33         | 55.79          | 44.69          | -11.10        | 82.30          | 37.61       | PK  | Vertical | PASS    |
| 4                   | 5999.67         | 59.06          | 50.07          | -8.99         | 82.30          | 32.23       | PK  | Vertical | PASS    |
| 5                   | 13839.28        | 47.10          | 43.82          | -3.28         | 82.30          | 38.48       | PK  | Vertical | PASS    |
| 6                   | 17693.90        | 46.23          | 46.16          | -0.07         | 82.30          | 36.14       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


# TX Radiated Test Result

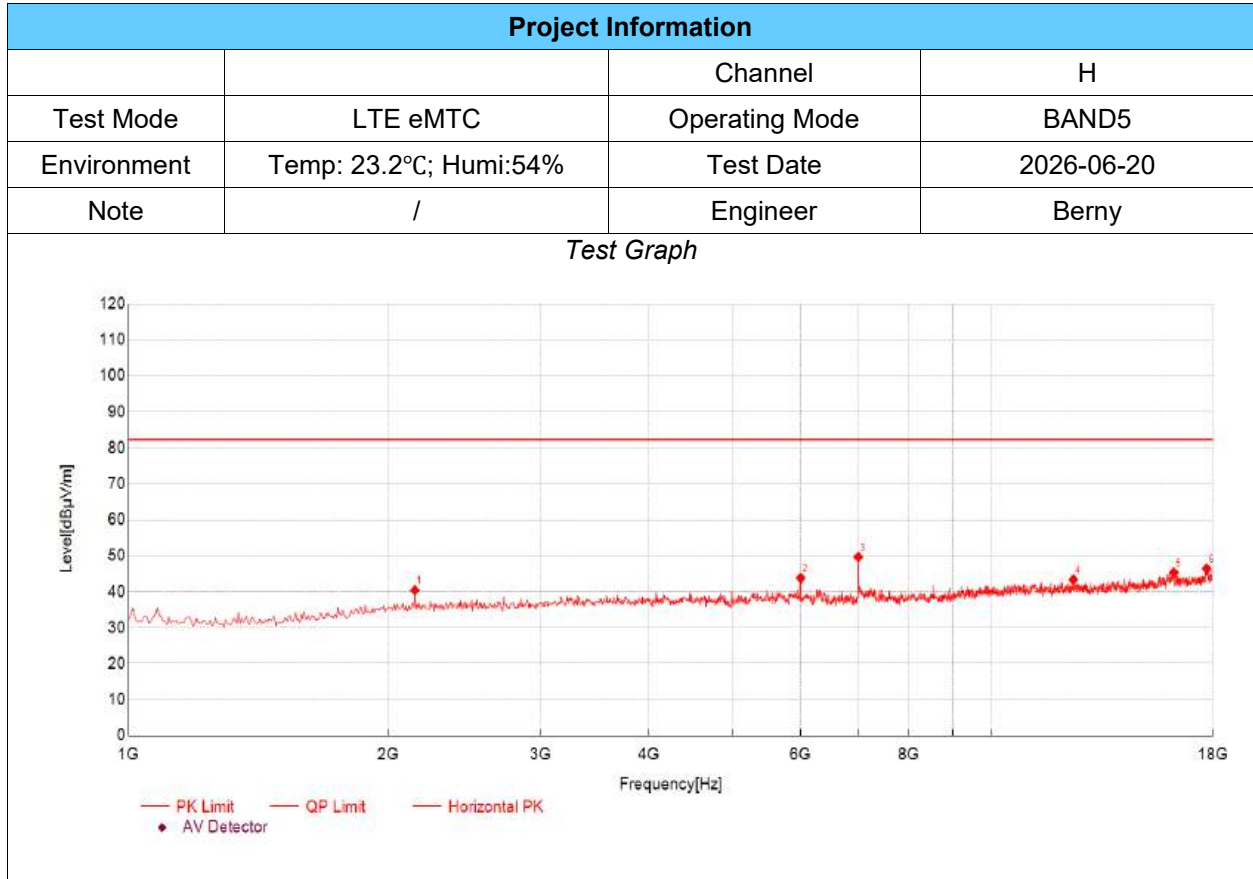

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2145.05         | 58.40          | 40.40          | -18.00        | 82.30          | 41.90       | PK  | Horizontal | PASS    |
| 2                   | 5999.67         | 52.82          | 43.83          | -8.99         | 82.30          | 38.47       | PK  | Horizontal | PASS    |
| 3                   | 6997.33         | 57.29          | 49.67          | -7.62         | 82.30          | 32.63       | PK  | Horizontal | PASS    |
| 4                   | 12416.47        | 47.99          | 43.38          | -4.61         | 82.30          | 38.92       | PK  | Horizontal | PASS    |
| 5                   | 16225.74        | 45.82          | 45.34          | -0.48         | 82.30          | 36.96       | PK  | Horizontal | PASS    |
| 6                   | 17705.24        | 46.24          | 46.38          | 0.14          | 82.30          | 35.92       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

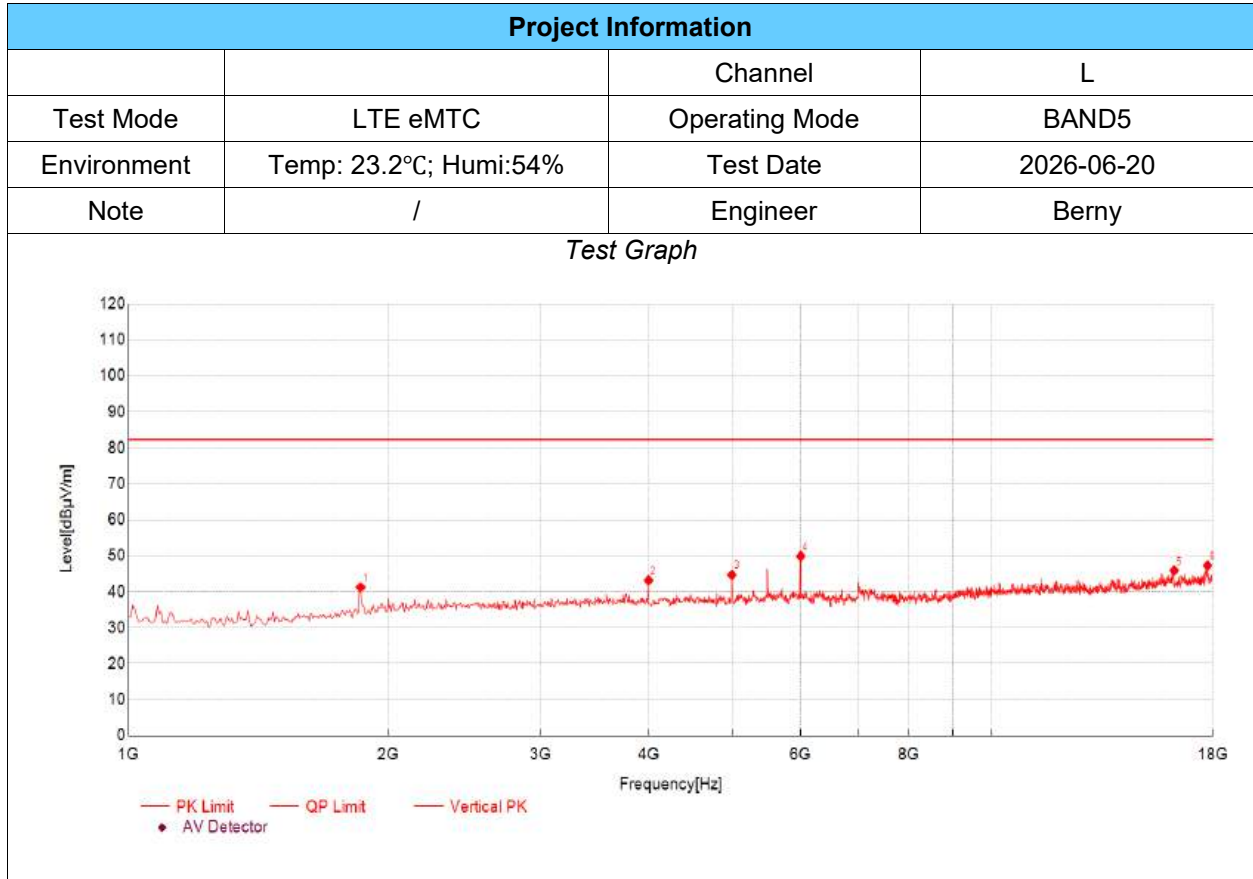

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1855.95         | 60.87          | 41.23          | -19.64        | 82.30          | 41.07       | PK  | Vertical | PASS    |
| 2                   | 3998.67         | 56.48          | 43.18          | -13.30        | 82.30          | 39.12       | PK  | Vertical | PASS    |
| 3                   | 4996.33         | 55.78          | 44.68          | -11.10        | 82.30          | 37.62       | PK  | Vertical | PASS    |
| 4                   | 5999.67         | 58.88          | 49.89          | -8.99         | 82.30          | 32.41       | PK  | Vertical | PASS    |
| 5                   | 16237.08        | 46.71          | 45.88          | -0.83         | 82.30          | 36.42       | PK  | Vertical | PASS    |
| 6                   | 17750.58        | 46.76          | 47.28          | 0.52          | 82.30          | 35.02       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

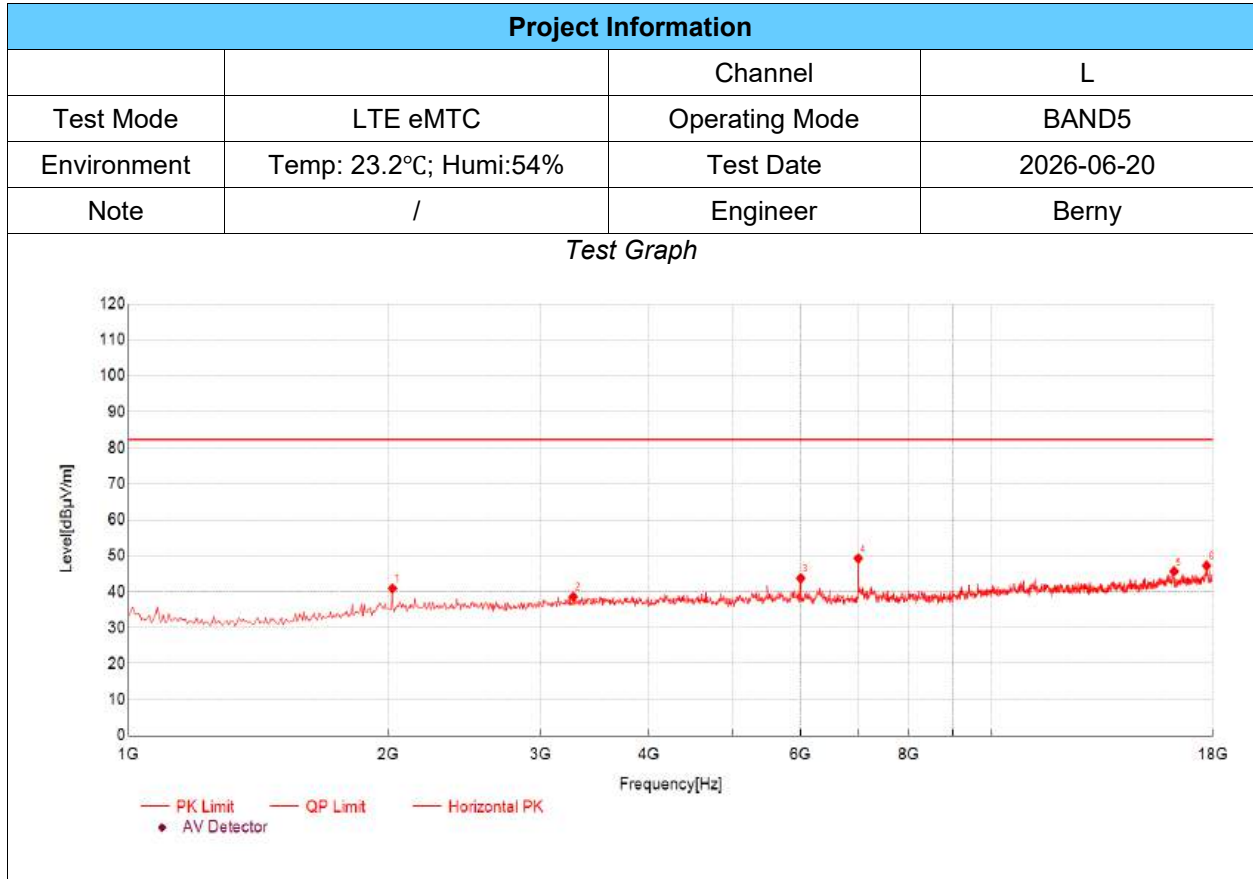

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2020.34         | 59.25          | 40.89          | -18.36        | 82.30          | 41.41       | PK  | Horizontal | PASS    |
| 2                   | 3273.09         | 53.48          | 38.62          | -14.86        | 82.30          | 43.68       | PK  | Horizontal | PASS    |
| 3                   | 5999.67         | 52.75          | 43.76          | -8.99         | 82.30          | 38.54       | PK  | Horizontal | PASS    |
| 4                   | 6997.33         | 56.89          | 49.27          | -7.62         | 82.30          | 33.03       | PK  | Horizontal | PASS    |
| 5                   | 16231.41        | 46.29          | 45.64          | -0.65         | 82.30          | 36.66       | PK  | Horizontal | PASS    |
| 6                   | 17705.24        | 47.09          | 47.23          | 0.14          | 82.30          | 35.07       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

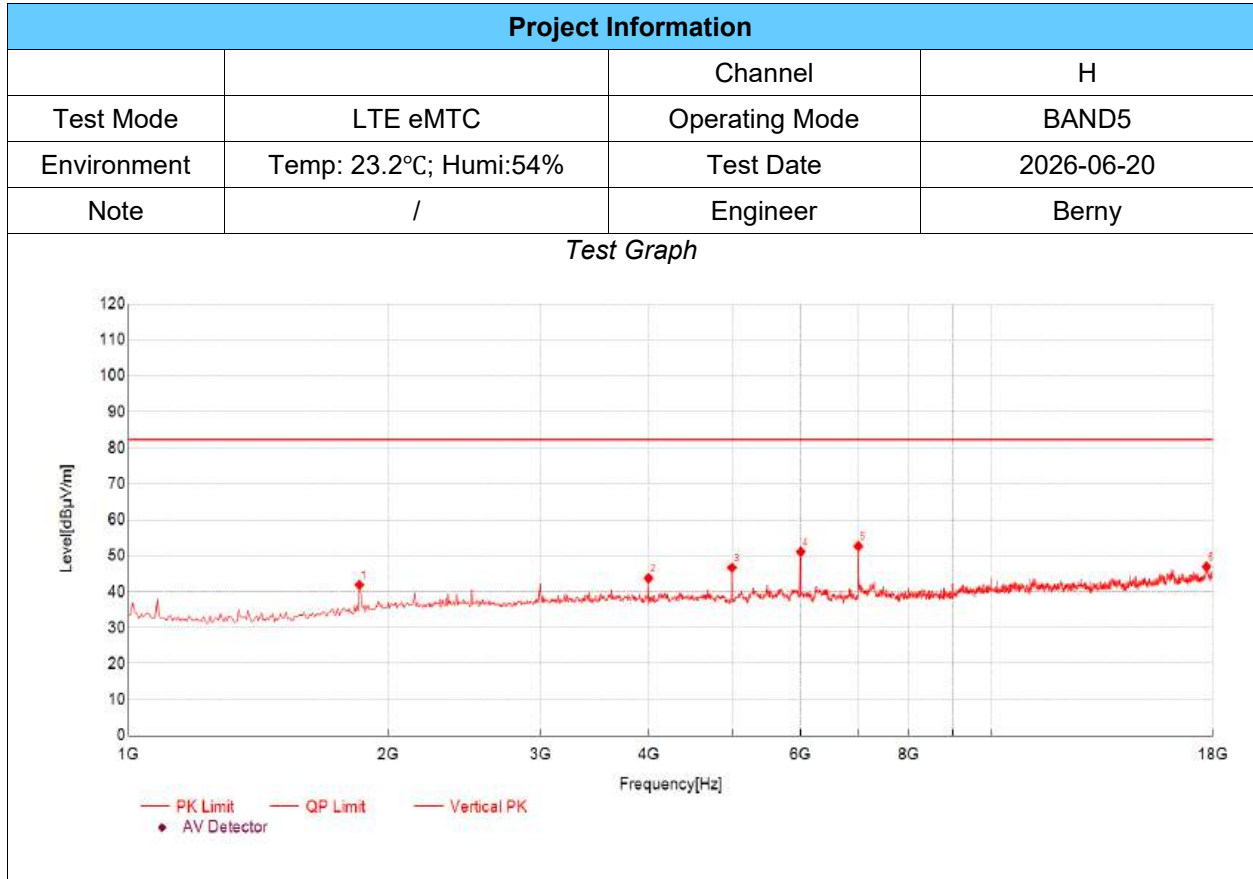

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1850.28         | 61.59          | 41.91          | -19.68        | 82.30          | 40.39       | PK  | Vertical | PASS    |
| 2                   | 3998.67         | 57.08          | 43.78          | -13.30        | 82.30          | 38.52       | PK  | Vertical | PASS    |
| 3                   | 4996.33         | 57.78          | 46.68          | -11.10        | 82.30          | 35.62       | PK  | Vertical | PASS    |
| 4                   | 5999.67         | 60.09          | 51.10          | -8.99         | 82.30          | 31.20       | PK  | Vertical | PASS    |
| 5                   | 6997.33         | 60.31          | 52.69          | -7.62         | 82.30          | 29.61       | PK  | Vertical | PASS    |
| 6                   | 17699.57        | 46.94          | 46.96          | 0.02          | 82.30          | 35.34       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

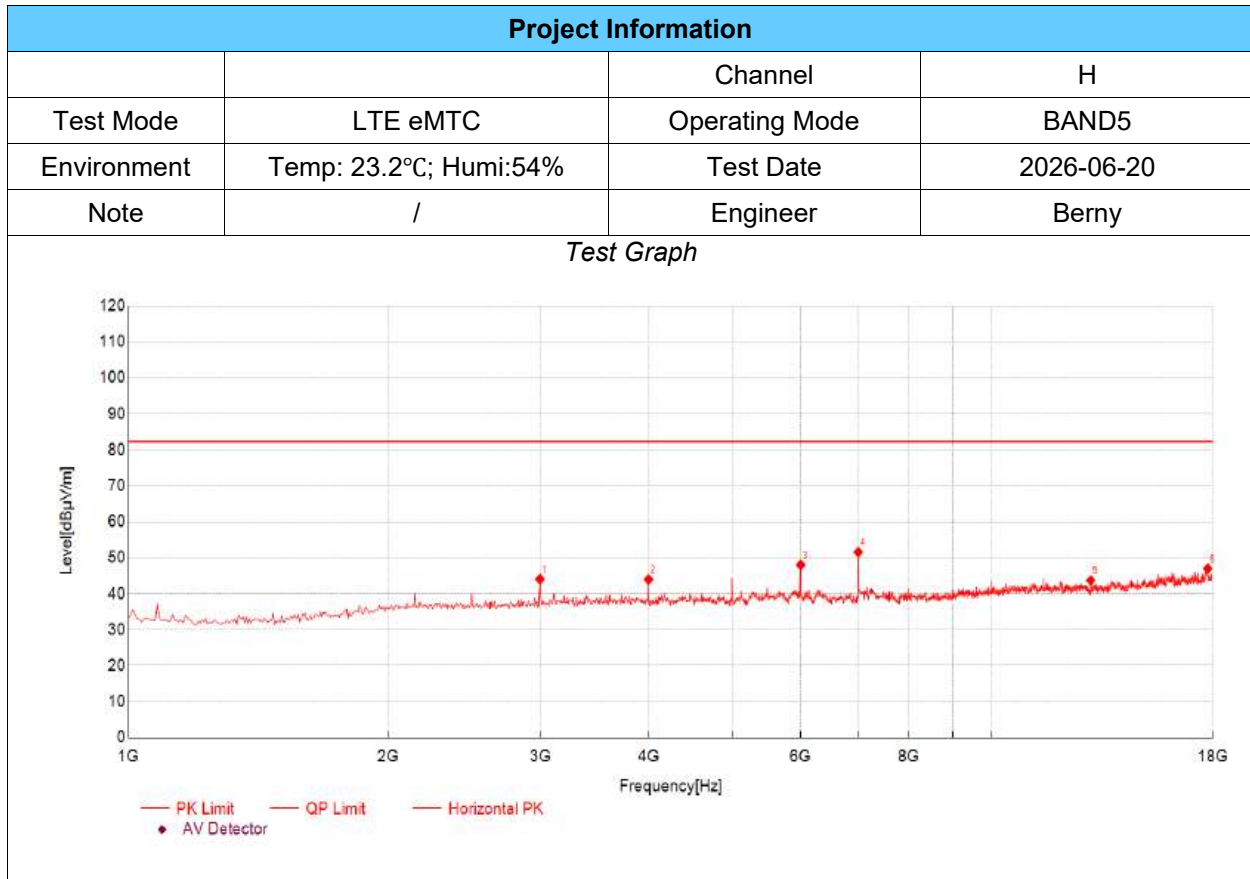


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2995.33         | 59.95          | 44.07          | -15.88        | 82.30          | 38.23       | PK  | Horizontal | PASS    |
| 2                   | 3998.67         | 57.27          | 43.97          | -13.30        | 82.30          | 38.33       | PK  | Horizontal | PASS    |
| 3                   | 5999.67         | 57.00          | 48.01          | -8.99         | 82.30          | 34.29       | PK  | Horizontal | PASS    |
| 4                   | 6997.33         | 59.22          | 51.60          | -7.62         | 82.30          | 30.70       | PK  | Horizontal | PASS    |
| 5                   | 13000.33        | 48.28          | 43.72          | -4.56         | 82.30          | 38.58       | PK  | Horizontal | PASS    |
| 6                   | 17761.92        | 46.87          | 46.99          | 0.12          | 82.30          | 35.31       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

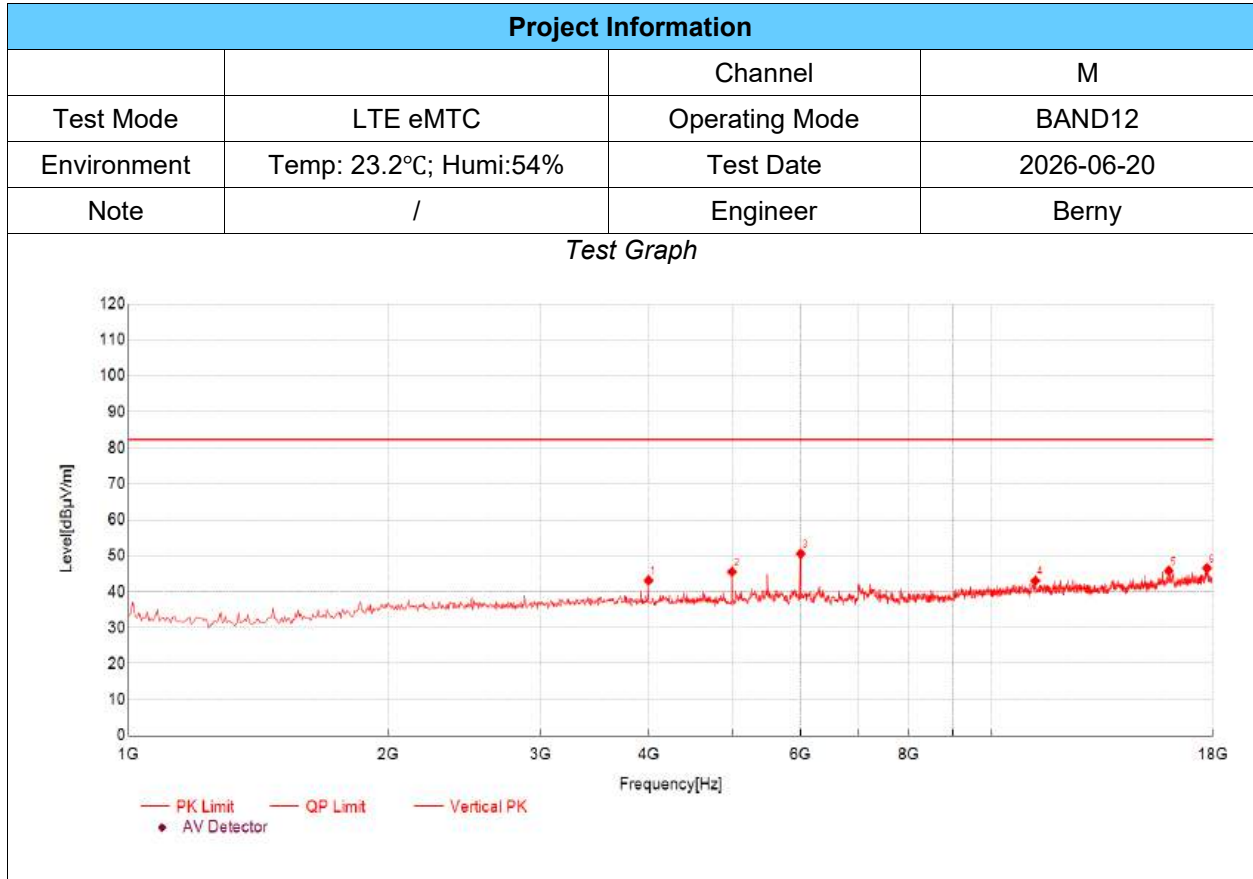


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 3998.67         | 56.44          | 43.14          | -13.30        | 82.30          | 39.16       | PK  | Vertical | PASS    |
| 2                   | 4996.33         | 56.63          | 45.53          | -11.10        | 82.30          | 36.77       | PK  | Vertical | PASS    |
| 3                   | 5999.67         | 59.55          | 50.56          | -8.99         | 82.30          | 31.74       | PK  | Vertical | PASS    |
| 4                   | 11220.41        | 46.62          | 43.07          | -3.55         | 82.30          | 39.23       | PK  | Vertical | PASS    |
| 5                   | 16010.34        | 47.64          | 45.83          | -1.81         | 82.30          | 36.47       | PK  | Vertical | PASS    |
| 6                   | 17722.24        | 46.07          | 46.53          | 0.46          | 82.30          | 35.77       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

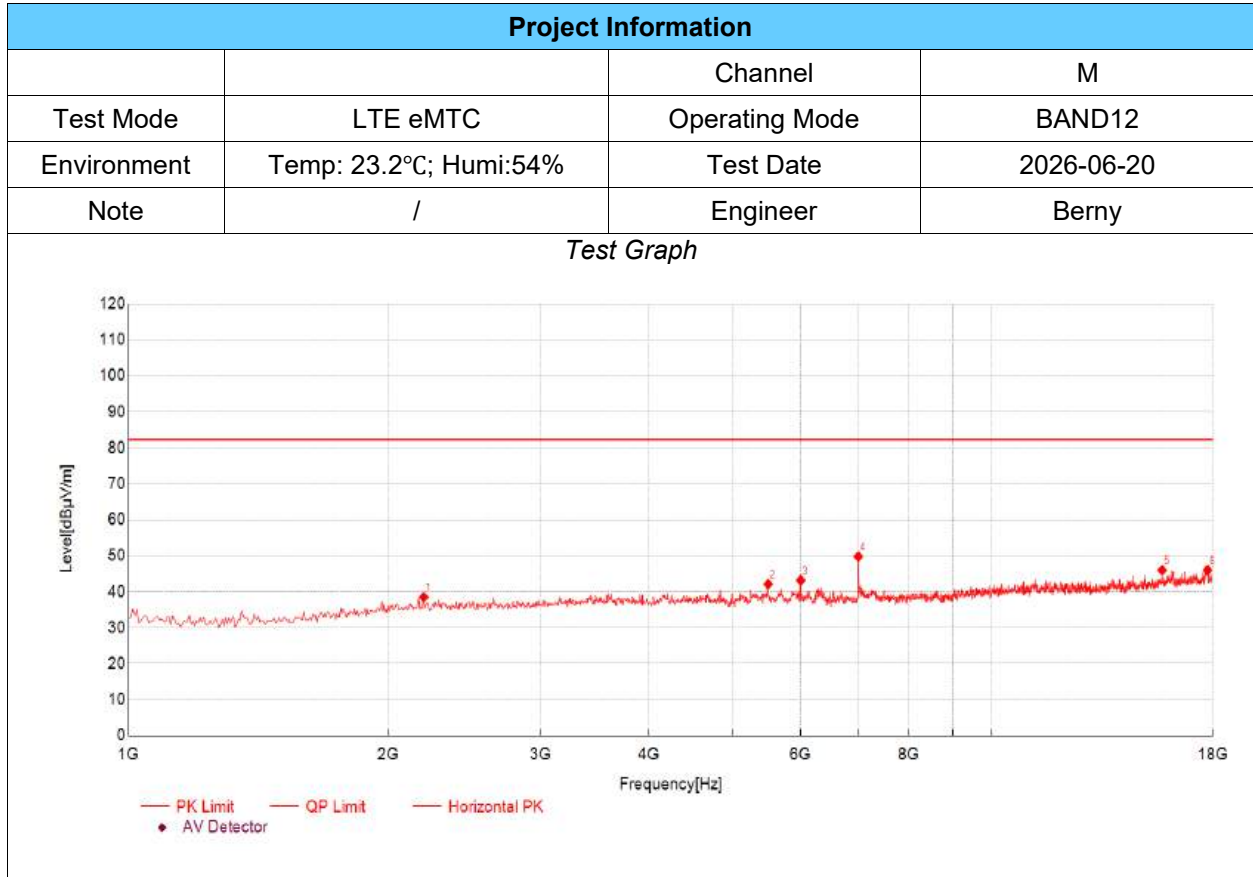


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2196.07         | 56.46          | 38.51          | -17.95        | 82.30          | 43.79       | PK  | Horizontal | PASS    |
| 2                   | 5500.83         | 51.43          | 42.11          | -9.32         | 82.30          | 40.19       | PK  | Horizontal | PASS    |
| 3                   | 5999.67         | 52.18          | 43.19          | -8.99         | 82.30          | 39.11       | PK  | Horizontal | PASS    |
| 4                   | 6997.33         | 57.41          | 49.79          | -7.62         | 82.30          | 32.51       | PK  | Horizontal | PASS    |
| 5                   | 15732.58        | 48.10          | 45.97          | -2.13         | 82.30          | 36.33       | PK  | Horizontal | PASS    |
| 6                   | 17750.58        | 45.44          | 45.96          | 0.52          | 82.30          | 36.34       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

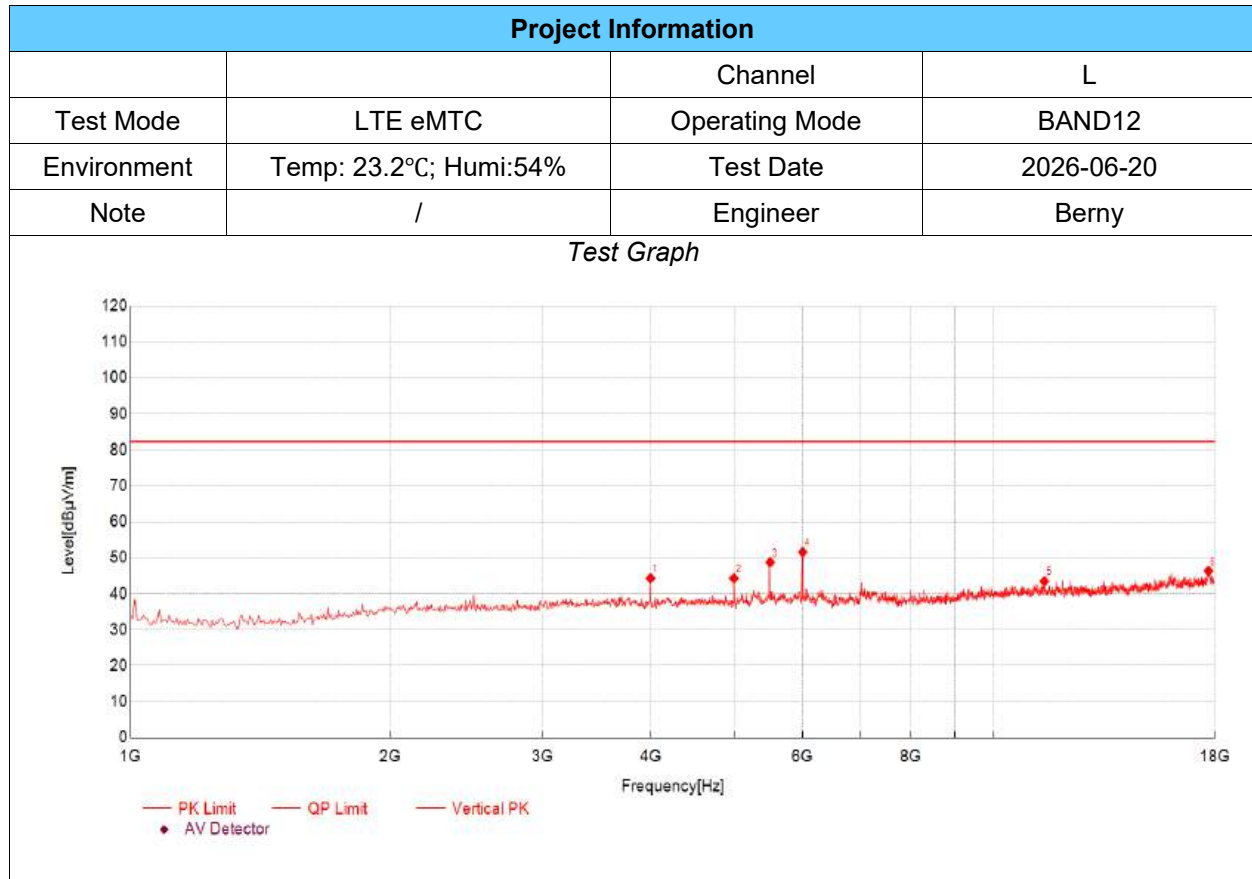


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 3998.67         | 57.59          | 44.29          | -13.30        | 82.30          | 38.01       | PK  | Vertical | PASS    |
| 2                   | 4996.33         | 55.38          | 44.28          | -11.10        | 82.30          | 38.02       | PK  | Vertical | PASS    |
| 3                   | 5500.83         | 58.07          | 48.75          | -9.32         | 82.30          | 33.55       | PK  | Vertical | PASS    |
| 4                   | 5999.67         | 60.58          | 51.59          | -8.99         | 82.30          | 30.71       | PK  | Vertical | PASS    |
| 5                   | 11430.14        | 47.63          | 43.47          | -4.16         | 82.30          | 38.83       | PK  | Vertical | PASS    |
| 6                   | 17693.90        | 46.39          | 46.32          | -0.07         | 82.30          | 35.98       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


# TX Radiated Test Result

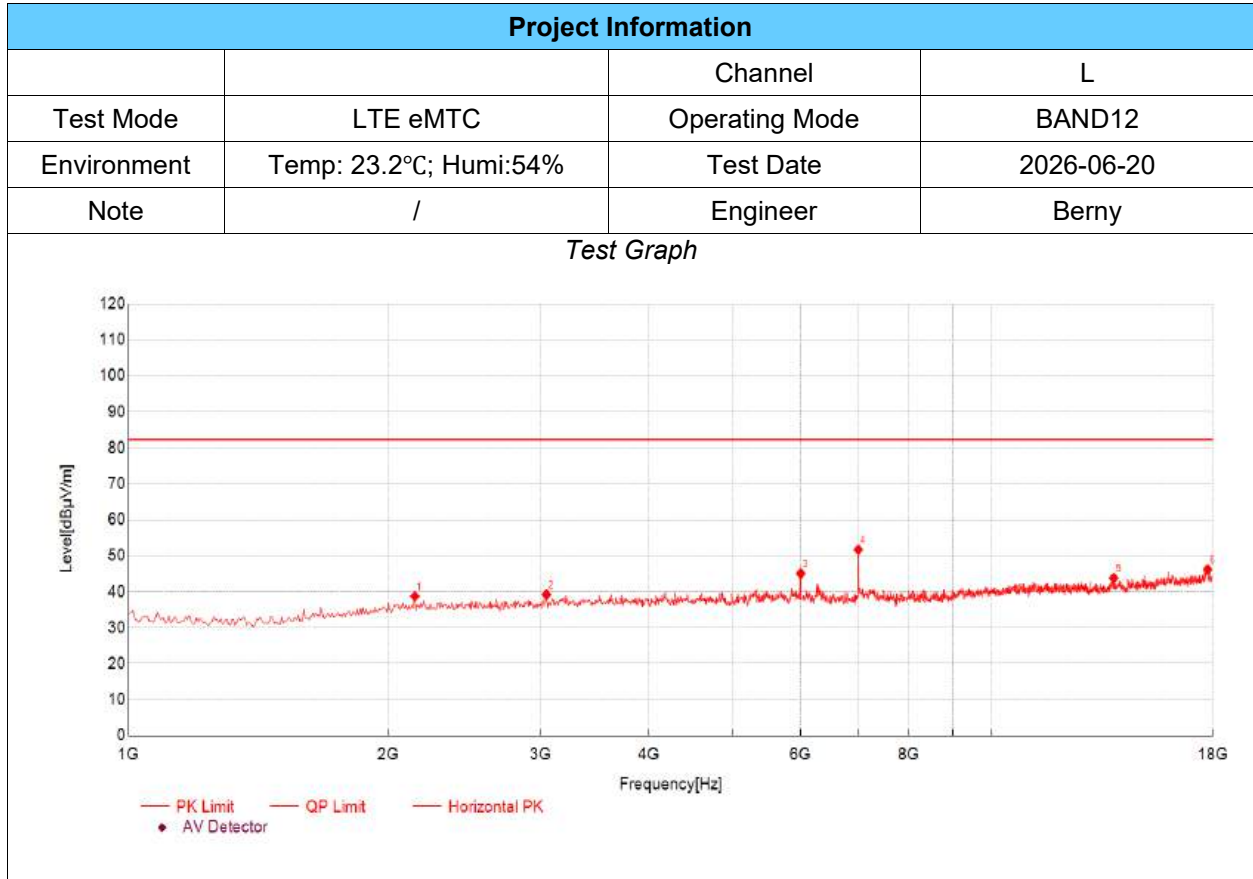

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2145.05         | 56.74          | 38.74          | -18.00        | 82.30          | 43.56       | PK  | Horizontal | PASS    |
| 2                   | 3046.35         | 54.84          | 39.20          | -15.64        | 82.30          | 43.10       | PK  | Horizontal | PASS    |
| 3                   | 5999.67         | 54.05          | 45.06          | -8.99         | 82.30          | 37.24       | PK  | Horizontal | PASS    |
| 4                   | 6997.33         | 59.34          | 51.72          | -7.62         | 82.30          | 30.58       | PK  | Horizontal | PASS    |
| 5                   | 13827.94        | 47.15          | 43.81          | -3.34         | 82.30          | 38.49       | PK  | Horizontal | PASS    |
| 6                   | 17756.25        | 45.84          | 46.16          | 0.32          | 82.30          | 36.14       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

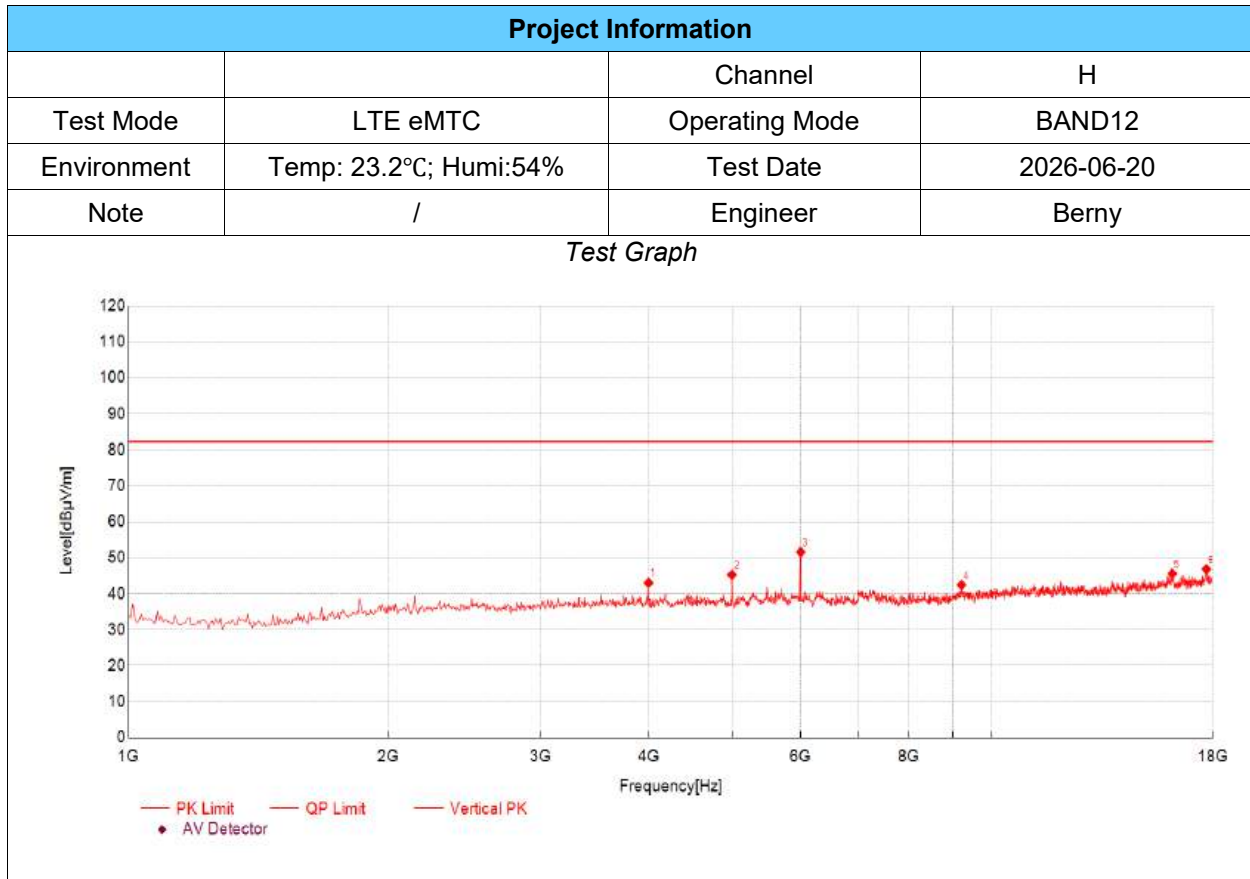


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 3998.67         | 56.33          | 43.03          | -13.30        | 82.30          | 39.27       | PK  | Vertical | PASS    |
| 2                   | 4996.33         | 56.35          | 45.25          | -11.10        | 82.30          | 37.05       | PK  | Vertical | PASS    |
| 3                   | 5999.67         | 60.59          | 51.60          | -8.99         | 82.30          | 30.70       | PK  | Vertical | PASS    |
| 4                   | 9213.74         | 49.14          | 42.43          | -6.71         | 82.30          | 39.87       | PK  | Vertical | PASS    |
| 5                   | 16157.72        | 45.79          | 45.59          | -0.20         | 82.30          | 36.71       | PK  | Vertical | PASS    |
| 6                   | 17693.90        | 46.89          | 46.82          | -0.07         | 82.30          | 35.48       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

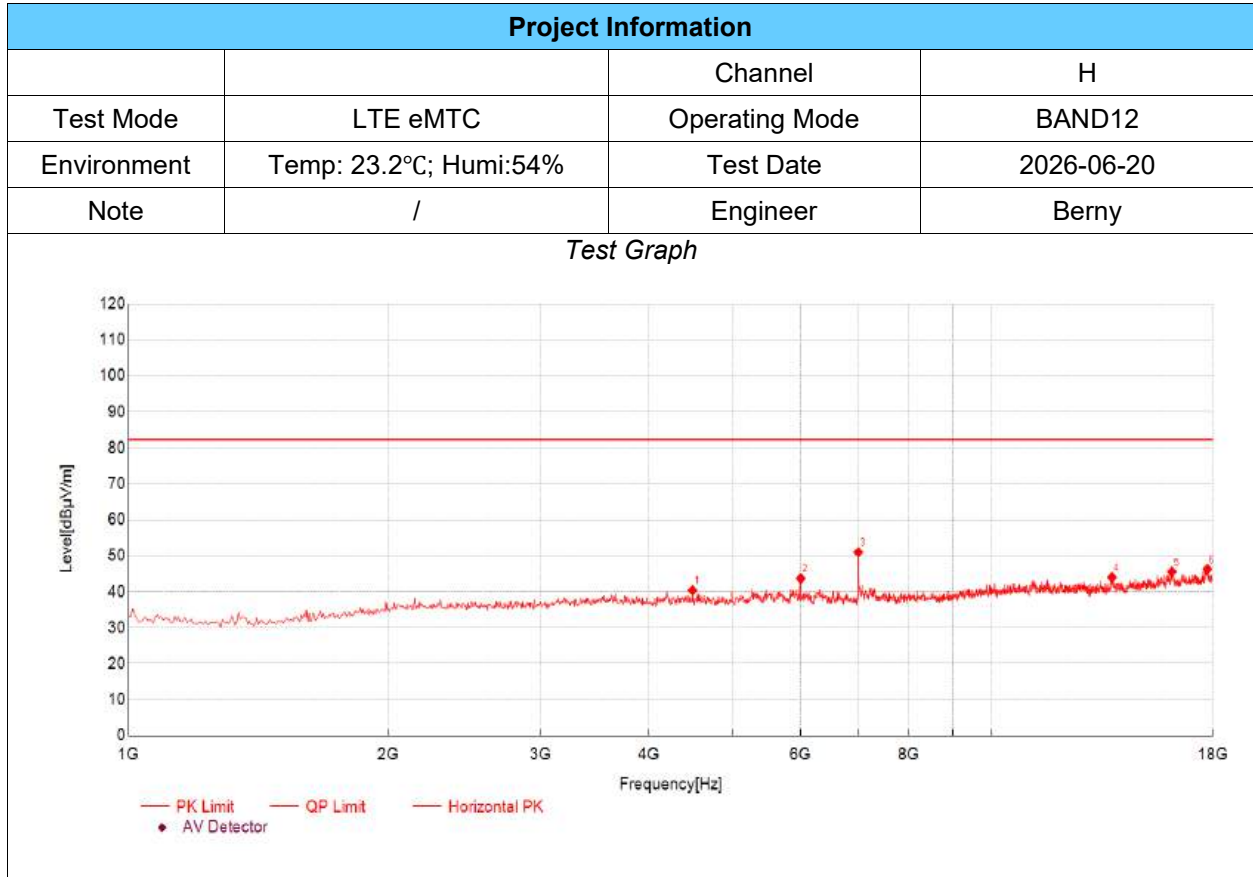


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 4497.50         | 52.43          | 40.38          | -12.05        | 82.30          | 41.92       | PK  | Horizontal | PASS    |
| 2                   | 5999.67         | 52.71          | 43.72          | -8.99         | 82.30          | 38.58       | PK  | Horizontal | PASS    |
| 3                   | 6997.33         | 58.63          | 51.01          | -7.62         | 82.30          | 31.29       | PK  | Horizontal | PASS    |
| 4                   | 13759.92        | 47.16          | 44.00          | -3.16         | 82.30          | 38.30       | PK  | Horizontal | PASS    |
| 5                   | 16140.71        | 46.17          | 45.58          | -0.59         | 82.30          | 36.72       | PK  | Horizontal | PASS    |
| 6                   | 17739.25        | 45.72          | 46.25          | 0.53          | 82.30          | 36.05       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

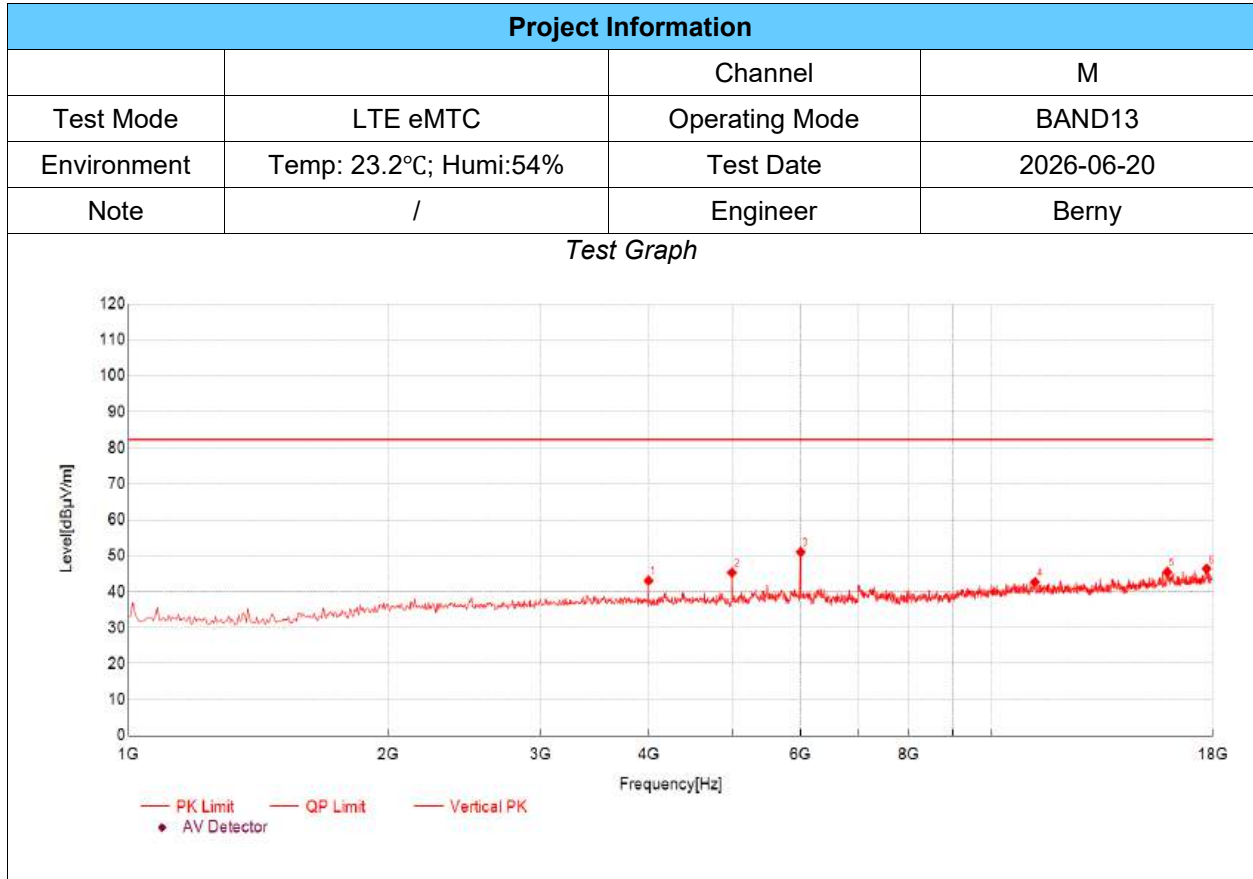

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 3998.67         | 56.40          | 43.10          | -13.30        | 82.30          | 39.20       | PK  | Vertical | PASS    |
| 2                   | 4996.33         | 56.38          | 45.28          | -11.10        | 82.30          | 37.02       | PK  | Vertical | PASS    |
| 3                   | 5999.67         | 60.02          | 51.03          | -8.99         | 82.30          | 31.27       | PK  | Vertical | PASS    |
| 4                   | 11209.07        | 46.29          | 42.70          | -3.59         | 82.30          | 39.60       | PK  | Vertical | PASS    |
| 5                   | 15942.31        | 47.27          | 45.44          | -1.83         | 82.30          | 36.86       | PK  | Vertical | PASS    |
| 6                   | 17705.24        | 46.23          | 46.37          | 0.14          | 82.30          | 35.93       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

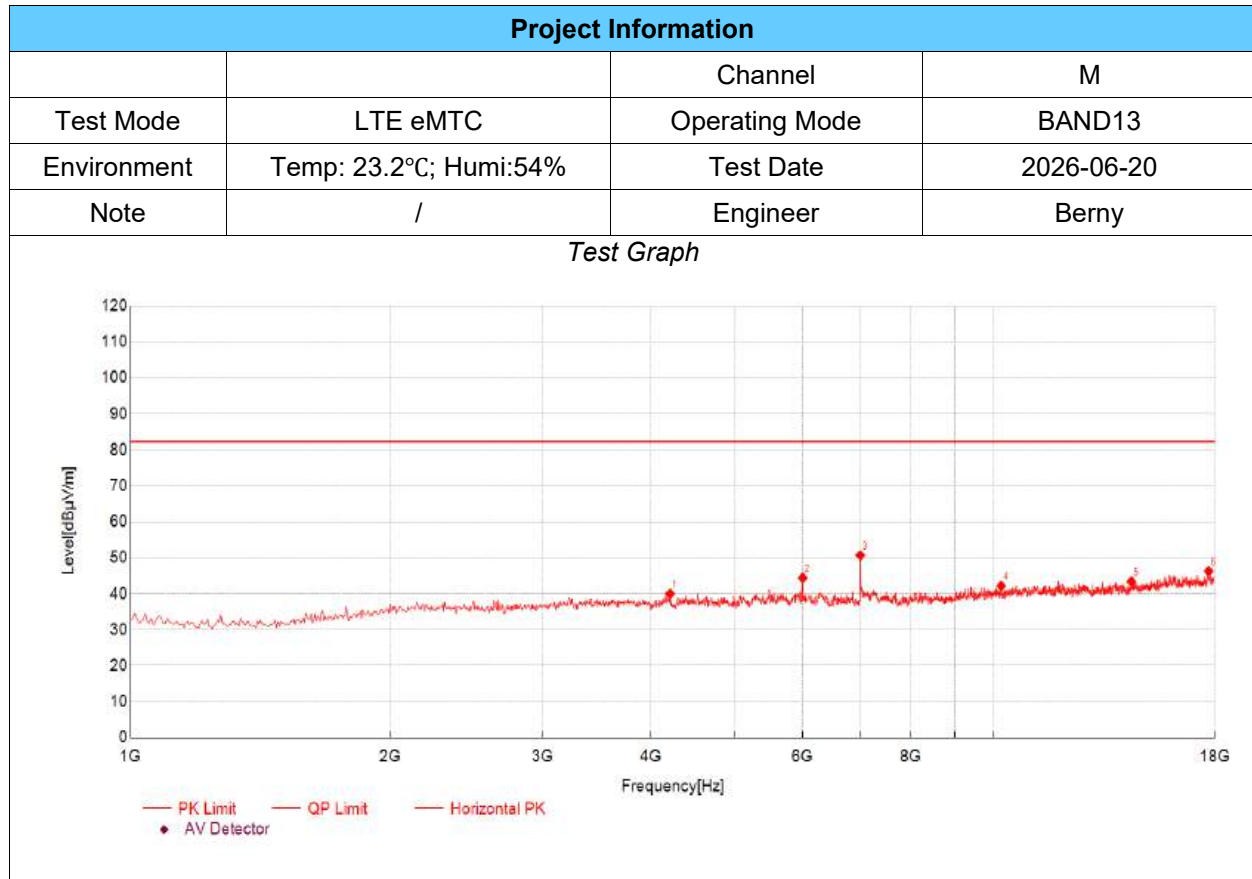


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 4214.07         | 52.39          | 39.98          | -12.41        | 82.30          | 42.32       | PK  | Horizontal | PASS    |
| 2                   | 5999.67         | 53.41          | 44.42          | -8.99         | 82.30          | 37.88       | PK  | Horizontal | PASS    |
| 3                   | 6997.33         | 58.30          | 50.68          | -7.62         | 82.30          | 31.62       | PK  | Horizontal | PASS    |
| 4                   | 10183.06        | 48.34          | 42.17          | -6.17         | 82.30          | 40.13       | PK  | Horizontal | PASS    |
| 5                   | 14417.47        | 46.70          | 43.43          | -3.27         | 82.30          | 38.87       | PK  | Horizontal | PASS    |
| 6                   | 17705.24        | 46.09          | 46.23          | 0.14          | 82.30          | 36.07       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

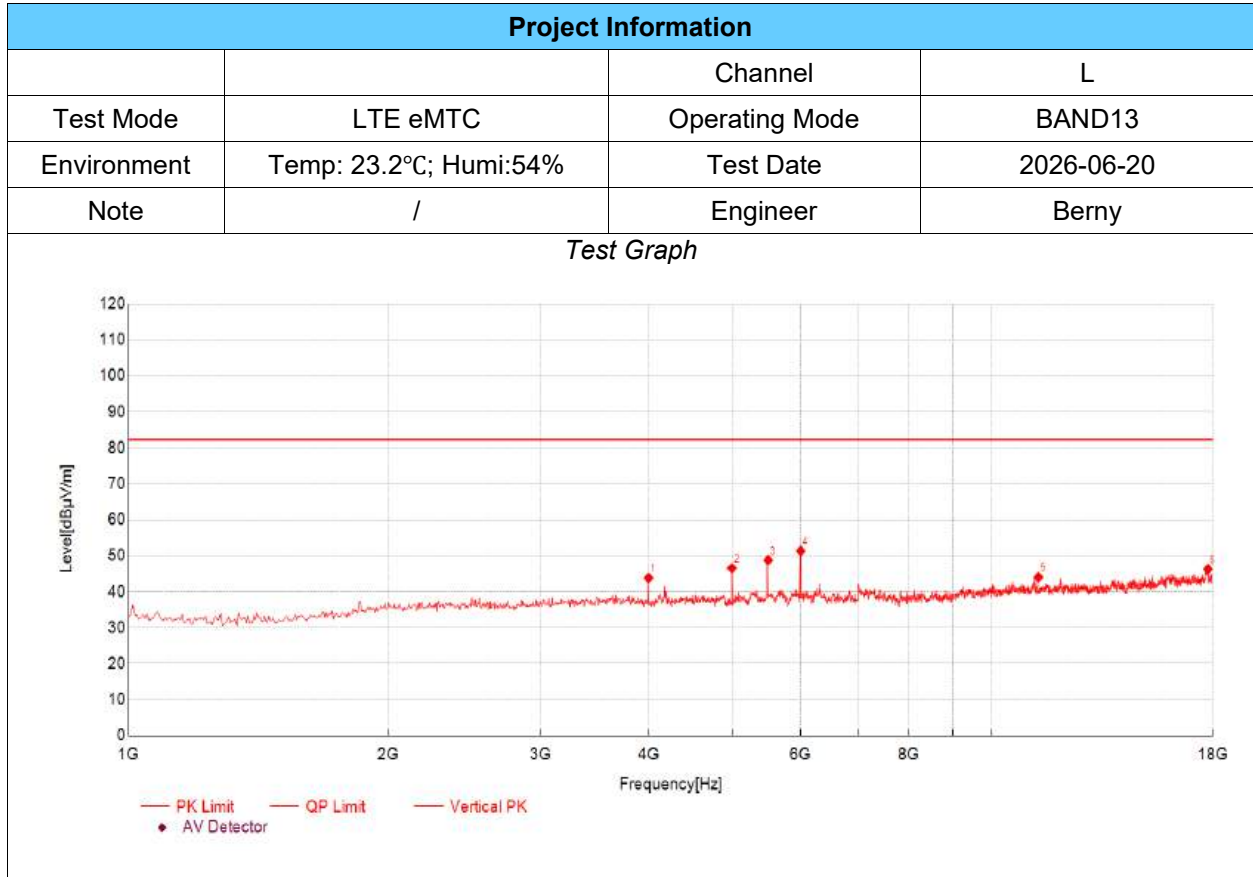

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 3998.67         | 57.14          | 43.84          | -13.30        | 82.30          | 38.46       | PK  | Vertical | PASS    |
| 2                   | 4996.33         | 57.62          | 46.52          | -11.10        | 82.30          | 35.78       | PK  | Vertical | PASS    |
| 3                   | 5500.83         | 58.11          | 48.79          | -9.32         | 82.30          | 33.51       | PK  | Vertical | PASS    |
| 4                   | 5999.67         | 60.36          | 51.37          | -8.99         | 82.30          | 30.93       | PK  | Vertical | PASS    |
| 5                   | 11305.44        | 48.94          | 44.05          | -4.89         | 82.30          | 38.25       | PK  | Vertical | PASS    |
| 6                   | 17767.59        | 46.32          | 46.24          | -0.08         | 82.30          | 36.06       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | L          |
| Test Mode           | LTE eMTC               | Operating Mode | BAND13     |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

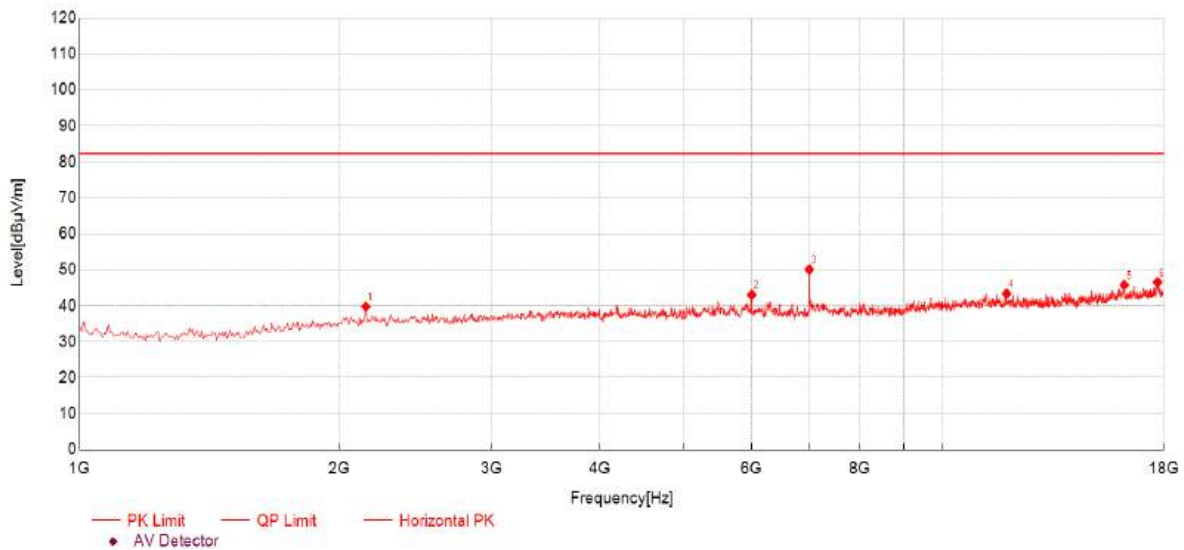


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2145.05         | 57.75          | 39.75          | -18.00        | 82.30          | 42.55       | PK  | Horizontal | PASS    |
| 2                   | 5999.67         | 52.02          | 43.03          | -8.99         | 82.30          | 39.27       | PK  | Horizontal | PASS    |
| 3                   | 6997.33         | 57.70          | 50.08          | -7.62         | 82.30          | 32.22       | PK  | Horizontal | PASS    |
| 4                   | 11838.28        | 47.55          | 43.37          | -4.18         | 82.30          | 38.93       | PK  | Horizontal | PASS    |
| 5                   | 16197.40        | 46.10          | 45.74          | -0.36         | 82.30          | 36.56       | PK  | Horizontal | PASS    |
| 6                   | 17699.57        | 46.51          | 46.53          | 0.02          | 82.30          | 35.77       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

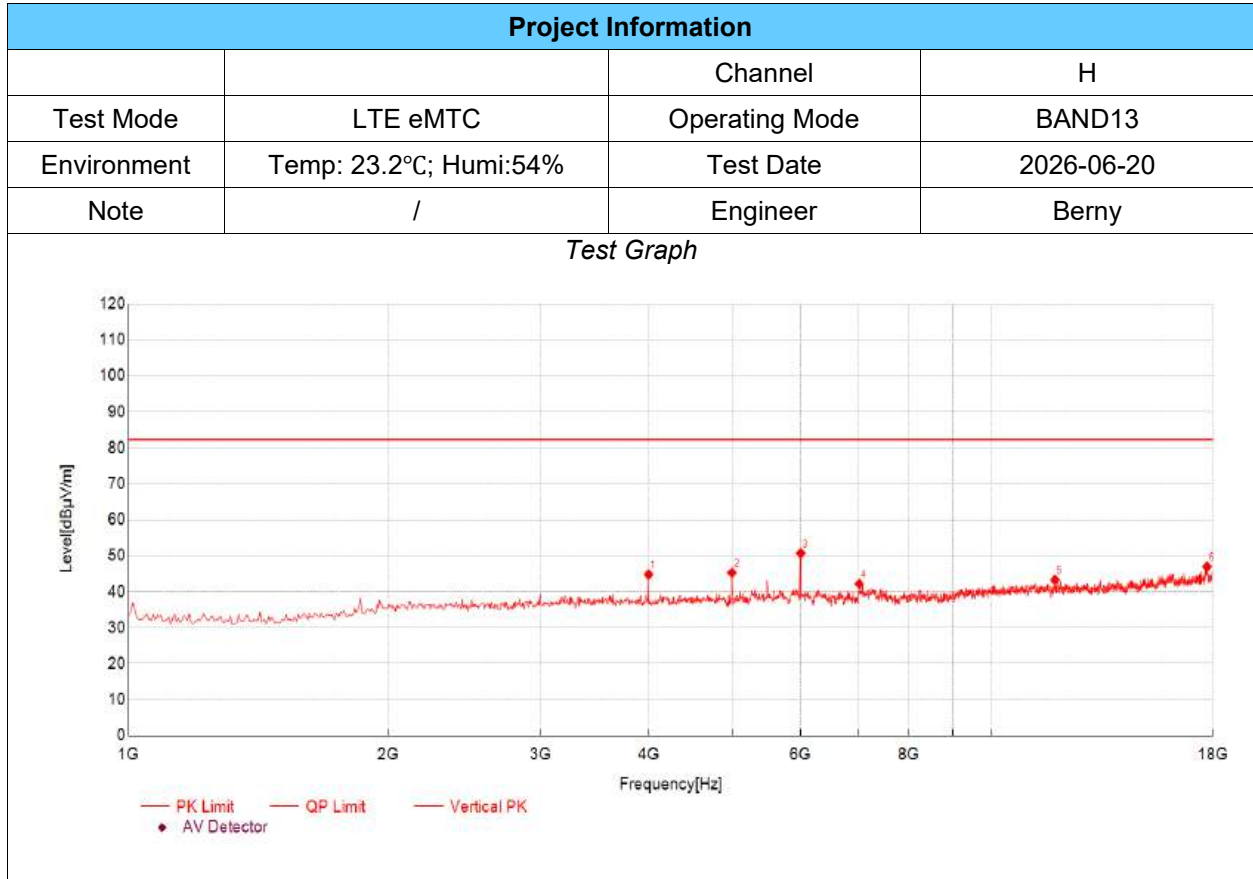


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 3998.67         | 58.10          | 44.80          | -13.30        | 82.30          | 37.50       | PK  | Vertical | PASS    |
| 2                   | 4996.33         | 56.36          | 45.26          | -11.10        | 82.30          | 37.04       | PK  | Vertical | PASS    |
| 3                   | 5999.67         | 59.69          | 50.70          | -8.99         | 82.30          | 31.60       | PK  | Vertical | PASS    |
| 4                   | 7014.34         | 49.70          | 42.20          | -7.50         | 82.30          | 40.10       | PK  | Vertical | PASS    |
| 5                   | 11815.61        | 47.47          | 43.29          | -4.18         | 82.30          | 39.01       | PK  | Vertical | PASS    |
| 6                   | 17722.24        | 46.49          | 46.95          | 0.46          | 82.30          | 35.35       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

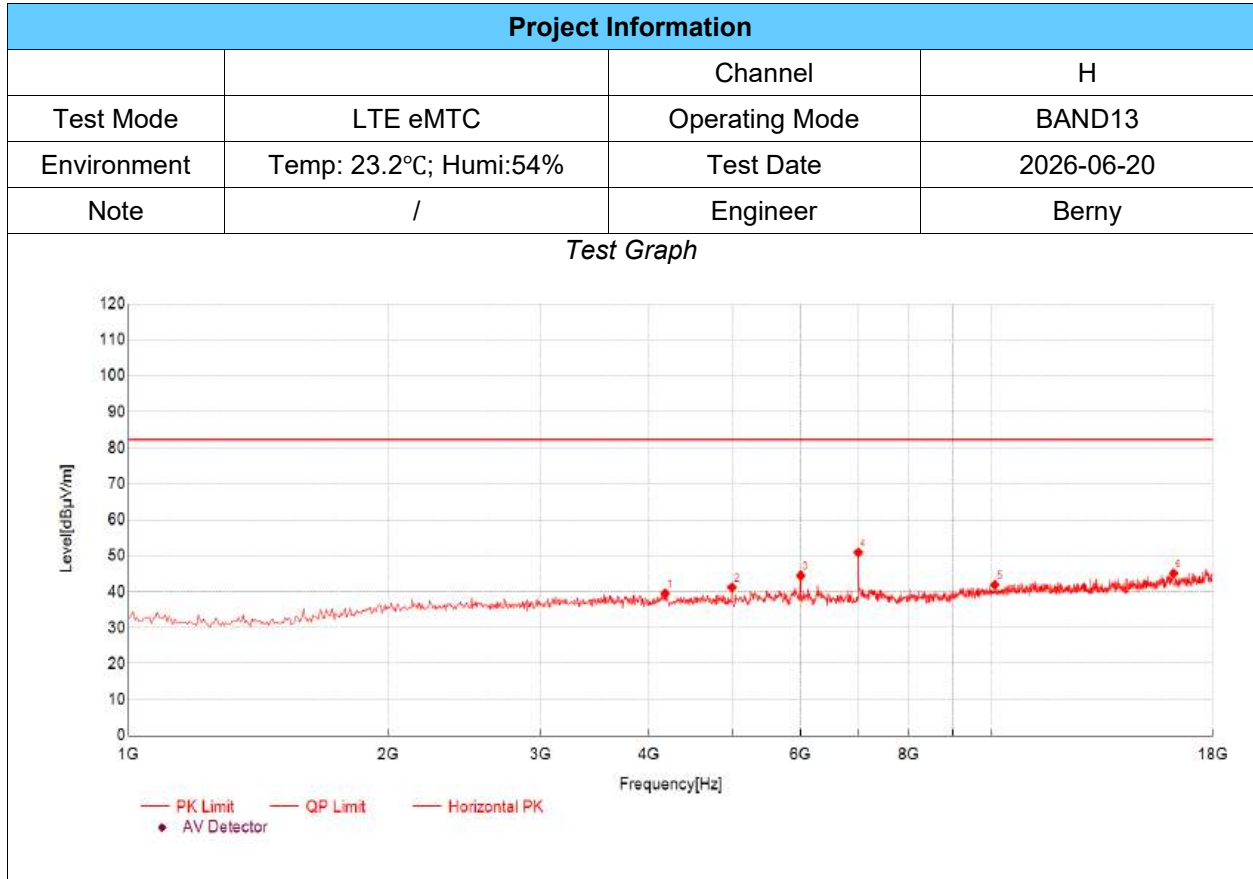

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 4180.06         | 51.63          | 39.46          | -12.17        | 82.30          | 42.84       | PK  | Horizontal | PASS    |
| 2                   | 4996.33         | 52.30          | 41.20          | -11.10        | 82.30          | 41.10       | PK  | Horizontal | PASS    |
| 3                   | 5999.67         | 53.48          | 44.49          | -8.99         | 82.30          | 37.81       | PK  | Horizontal | PASS    |
| 4                   | 6997.33         | 58.54          | 50.92          | -7.62         | 82.30          | 31.38       | PK  | Horizontal | PASS    |
| 5                   | 10069.69        | 48.09          | 41.91          | -6.18         | 82.30          | 40.39       | PK  | Horizontal | PASS    |
| 6                   | 16208.74        | 45.45          | 45.08          | -0.37         | 82.30          | 37.22       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

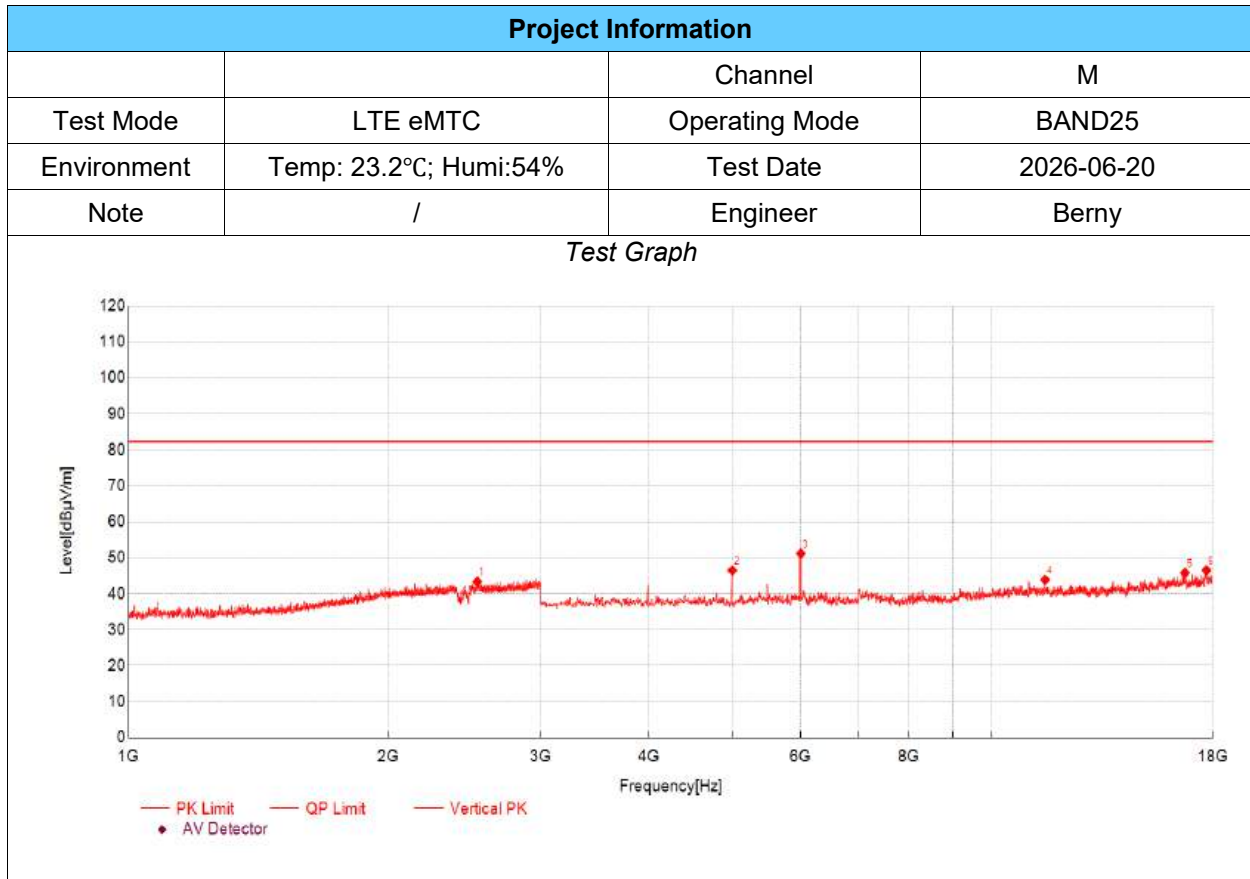


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2535.18         | 51.88          | 43.35          | -8.53         | 82.30          | 38.95       | PK  | Vertical | PASS    |
| 2                   | 5000.67         | 57.62          | 46.44          | -11.18        | 82.30          | 35.86       | PK  | Vertical | PASS    |
| 3                   | 6001.00         | 60.04          | 51.18          | -8.86         | 82.30          | 31.12       | PK  | Vertical | PASS    |
| 4                   | 11507.84        | 48.50          | 43.86          | -4.64         | 82.30          | 38.44       | PK  | Vertical | PASS    |
| 5                   | 16719.57        | 46.79          | 45.79          | -1.00         | 82.30          | 36.51       | PK  | Vertical | PASS    |
| 6                   | 17694.90        | 46.29          | 46.50          | 0.21          | 82.30          | 35.80       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

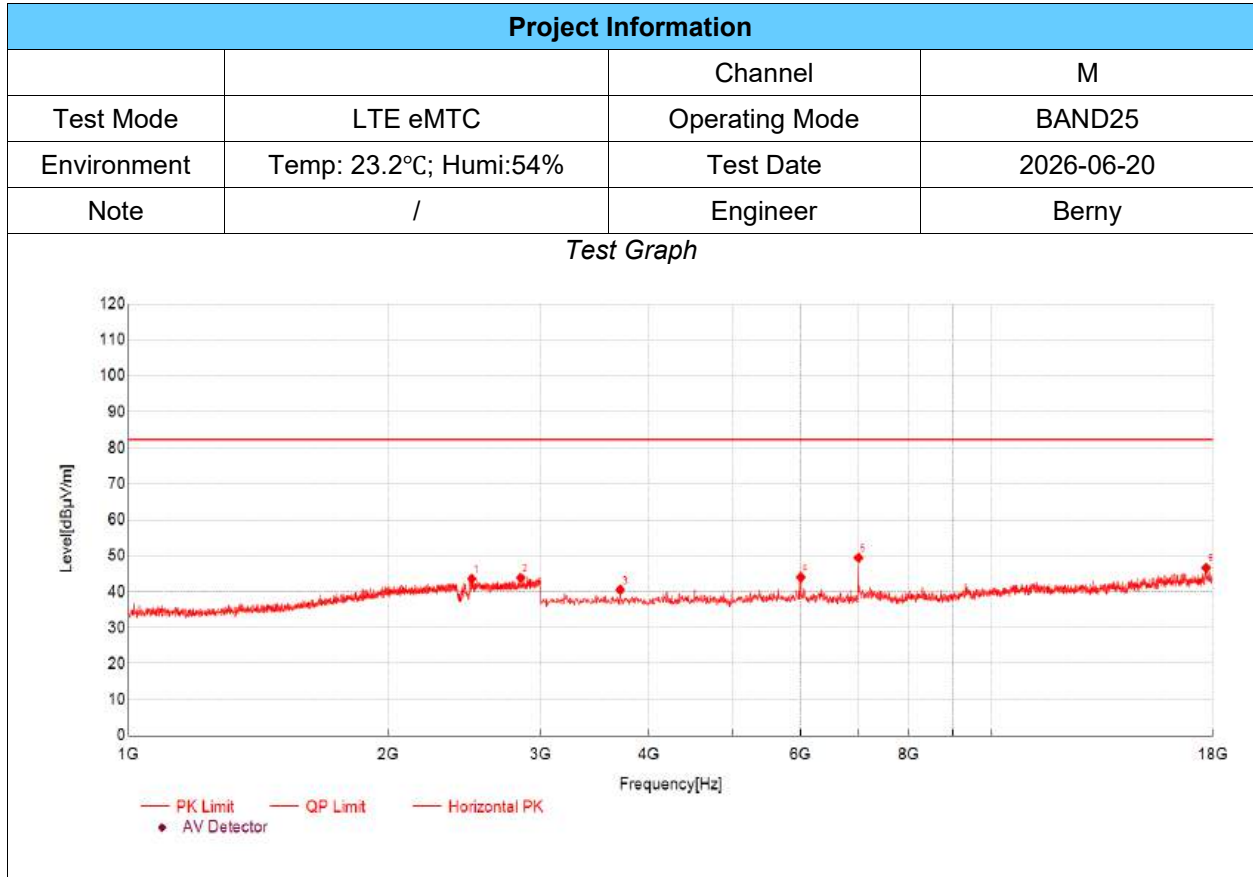

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2496.50         | 52.03          | 43.62          | -8.41         | 82.30          | 38.68       | PK  | Horizontal | PASS    |
| 2                   | 2843.95         | 51.85          | 43.87          | -7.98         | 82.30          | 38.43       | PK  | Horizontal | PASS    |
| 3                   | 3710.24         | 54.12          | 40.52          | -13.60        | 82.30          | 41.78       | PK  | Horizontal | PASS    |
| 4                   | 6001.00         | 52.89          | 44.03          | -8.86         | 82.30          | 38.27       | PK  | Horizontal | PASS    |
| 5                   | 7001.33         | 57.25          | 49.44          | -7.81         | 82.30          | 32.86       | PK  | Horizontal | PASS    |
| 6                   | 17679.89        | 46.34          | 46.63          | 0.29          | 82.30          | 35.67       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

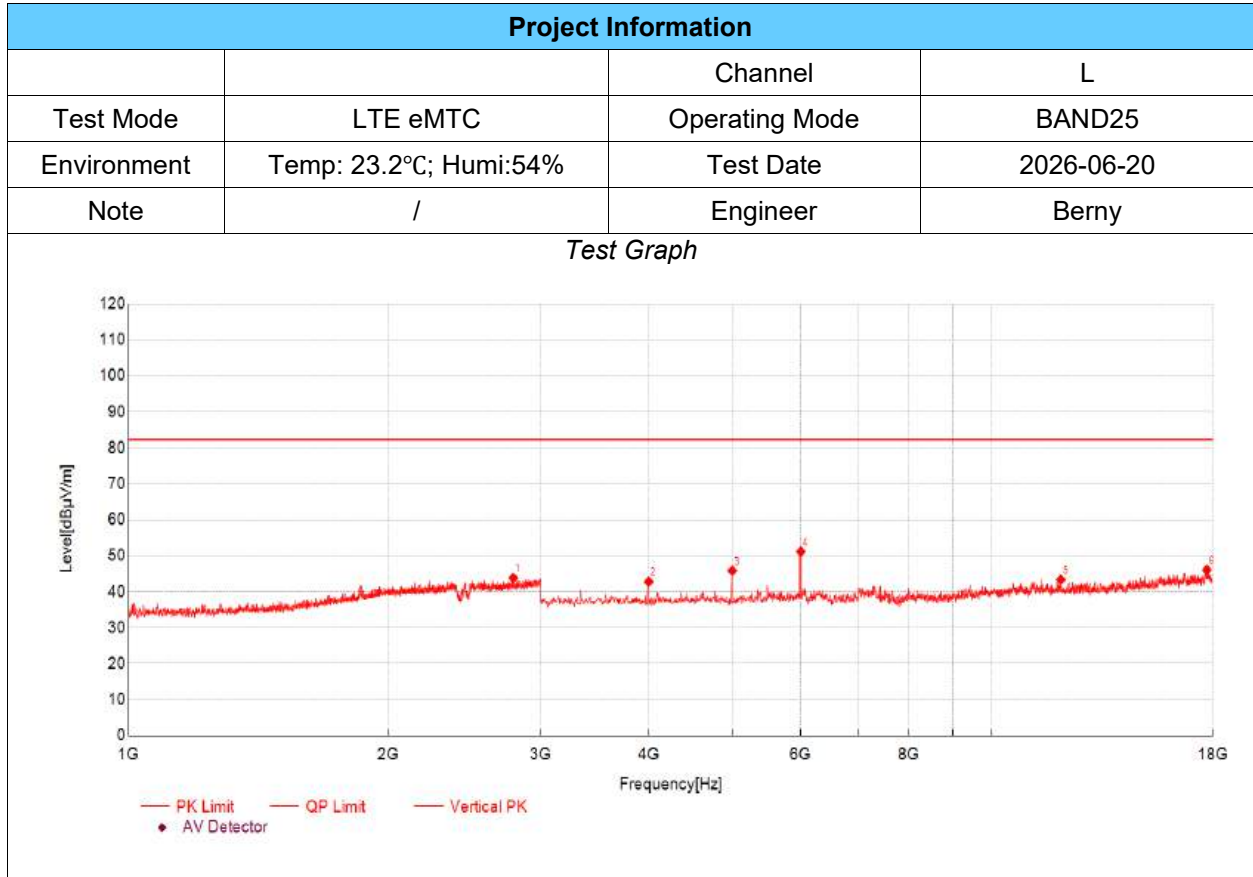

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2788.60         | 52.27          | 43.84          | -8.43         | 82.30          | 38.46       | PK  | Vertical | PASS    |
| 2                   | 4000.33         | 56.14          | 42.79          | -13.35        | 82.30          | 39.51       | PK  | Vertical | PASS    |
| 3                   | 5000.67         | 57.02          | 45.84          | -11.18        | 82.30          | 36.46       | PK  | Vertical | PASS    |
| 4                   | 6001.00         | 60.02          | 51.16          | -8.86         | 82.30          | 31.14       | PK  | Vertical | PASS    |
| 5                   | 12003.00        | 47.82          | 43.38          | -4.44         | 82.30          | 38.92       | PK  | Vertical | PASS    |
| 6                   | 17714.90        | 46.17          | 46.03          | -0.14         | 82.30          | 36.27       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | L          |
| Test Mode           | LTE eMTC               | Operating Mode | BAND25     |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

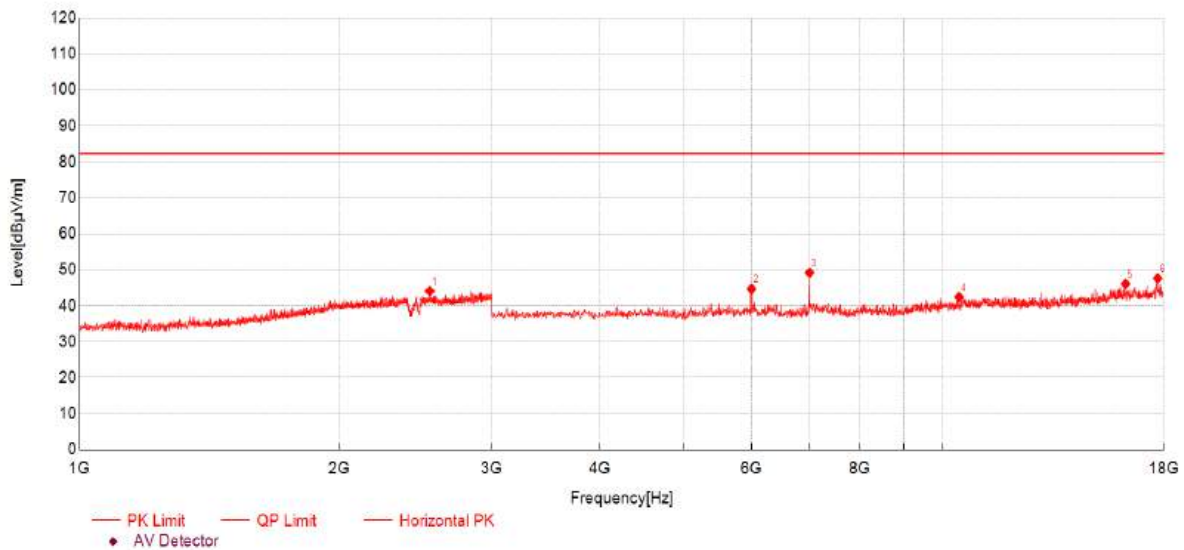

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2543.85         | 52.40          | 44.07          | -8.33         | 82.30          | 38.23       | PK  | Horizontal | PASS    |
| 2                   | 5996.00         | 53.59          | 44.68          | -8.91         | 82.30          | 37.62       | PK  | Horizontal | PASS    |
| 3                   | 7001.33         | 57.00          | 49.19          | -7.81         | 82.30          | 33.11       | PK  | Horizontal | PASS    |
| 4                   | 10427.48        | 48.15          | 42.44          | -5.71         | 82.30          | 39.86       | PK  | Horizontal | PASS    |
| 5                   | 16254.42        | 46.72          | 46.03          | -0.69         | 82.30          | 36.27       | PK  | Horizontal | PASS    |
| 6                   | 17704.90        | 47.53          | 47.60          | 0.07          | 82.30          | 34.70       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

| Project Information |                        |                |            |
|---------------------|------------------------|----------------|------------|
|                     |                        | Channel        | H          |
| Test Mode           | LTE eMTC               | Operating Mode | BAND25     |
| Environment         | Temp: 23.2°C; Humi:54% | Test Date      | 2026-06-20 |
| Note                | /                      | Engineer       | Berny      |

Test Graph

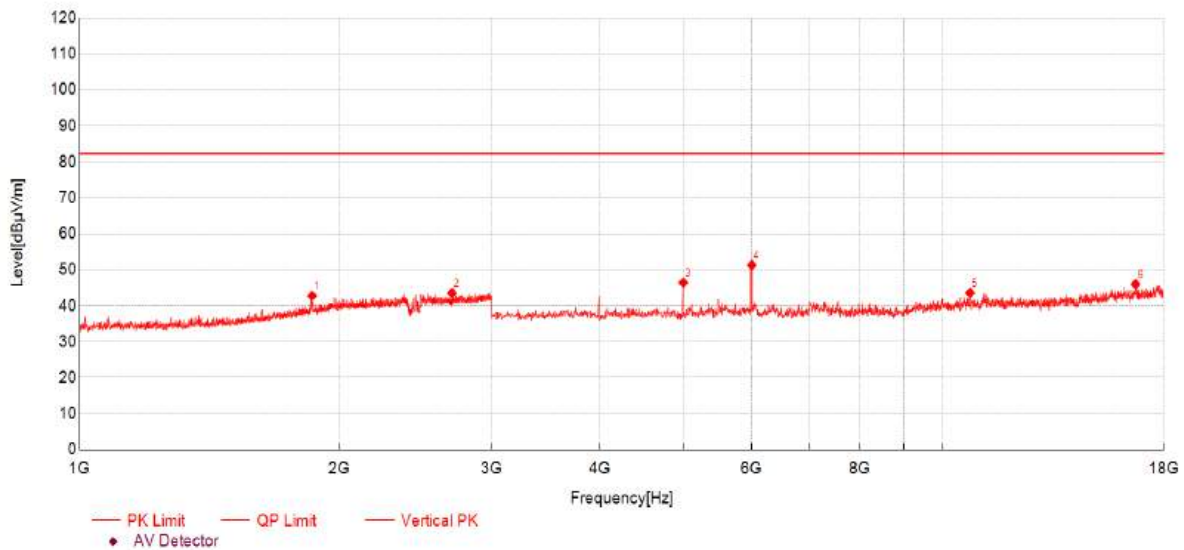


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1858.29         | 53.19          | 42.76          | -10.43        | 82.30          | 39.54       | PK  | Vertical | PASS    |
| 2                   | 2699.90         | 51.97          | 43.54          | -8.43         | 82.30          | 38.76       | PK  | Vertical | PASS    |
| 3                   | 5000.67         | 57.58          | 46.40          | -11.18        | 82.30          | 35.90       | PK  | Vertical | PASS    |
| 4                   | 6001.00         | 60.17          | 51.31          | -8.86         | 82.30          | 30.99       | PK  | Vertical | PASS    |
| 5                   | 10742.58        | 48.77          | 43.58          | -5.19         | 82.30          | 38.72       | PK  | Vertical | PASS    |
| 6                   | 16699.57        | 46.50          | 45.98          | -0.52         | 82.30          | 36.32       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

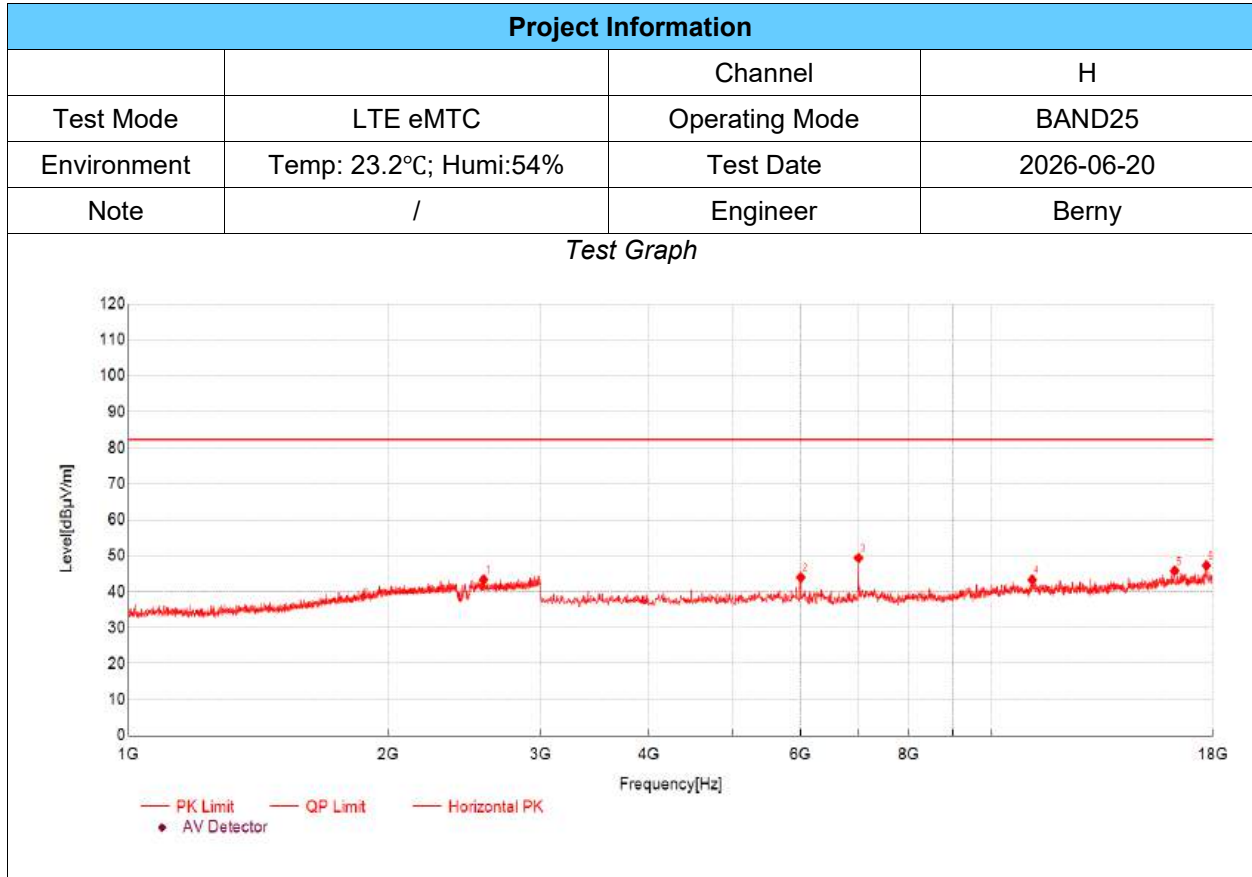


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2577.19         | 51.41          | 43.37          | -8.04         | 82.30          | 38.93       | PK  | Horizontal | PASS    |
| 2                   | 6001.00         | 52.84          | 43.98          | -8.86         | 82.30          | 38.32       | PK  | Horizontal | PASS    |
| 3                   | 7001.33         | 57.19          | 49.38          | -7.81         | 82.30          | 32.92       | PK  | Horizontal | PASS    |
| 4                   | 11122.71        | 47.69          | 43.34          | -4.35         | 82.30          | 38.96       | PK  | Horizontal | PASS    |
| 5                   | 16259.42        | 46.65          | 45.82          | -0.83         | 82.30          | 36.48       | PK  | Horizontal | PASS    |
| 6                   | 17694.90        | 47.08          | 47.29          | 0.21          | 82.30          | 35.01       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

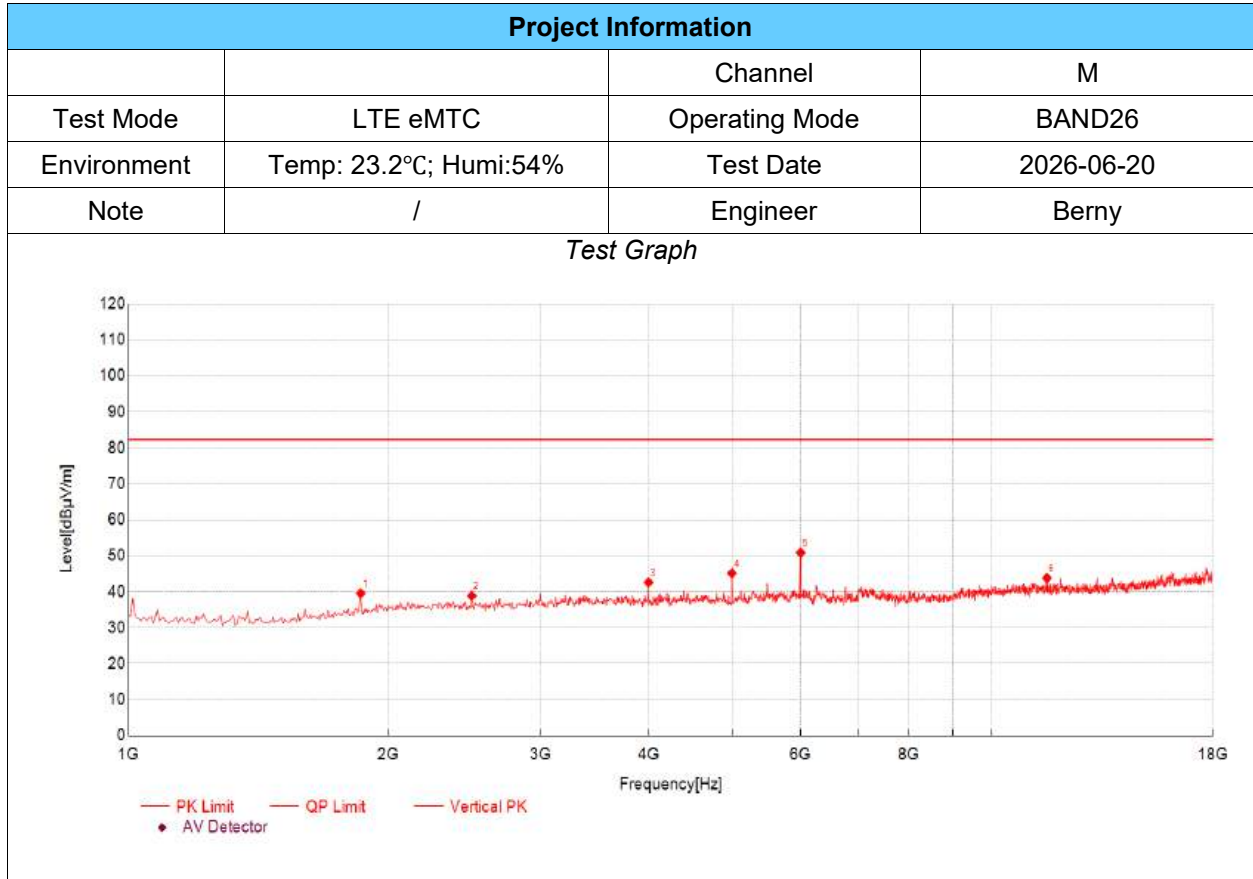


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1855.95         | 59.19          | 39.55          | -19.64        | 82.30          | 42.75       | PK  | Vertical | PASS    |
| 2                   | 2496.50         | 55.99          | 38.85          | -17.14        | 82.30          | 43.45       | PK  | Vertical | PASS    |
| 3                   | 3998.67         | 55.89          | 42.59          | -13.30        | 82.30          | 39.71       | PK  | Vertical | PASS    |
| 4                   | 4996.33         | 56.22          | 45.12          | -11.10        | 82.30          | 37.18       | PK  | Vertical | PASS    |
| 5                   | 5999.67         | 59.83          | 50.84          | -8.99         | 82.30          | 31.46       | PK  | Vertical | PASS    |
| 6                   | 11566.19        | 47.95          | 43.80          | -4.15         | 82.30          | 38.50       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


# TX Radiated Test Result

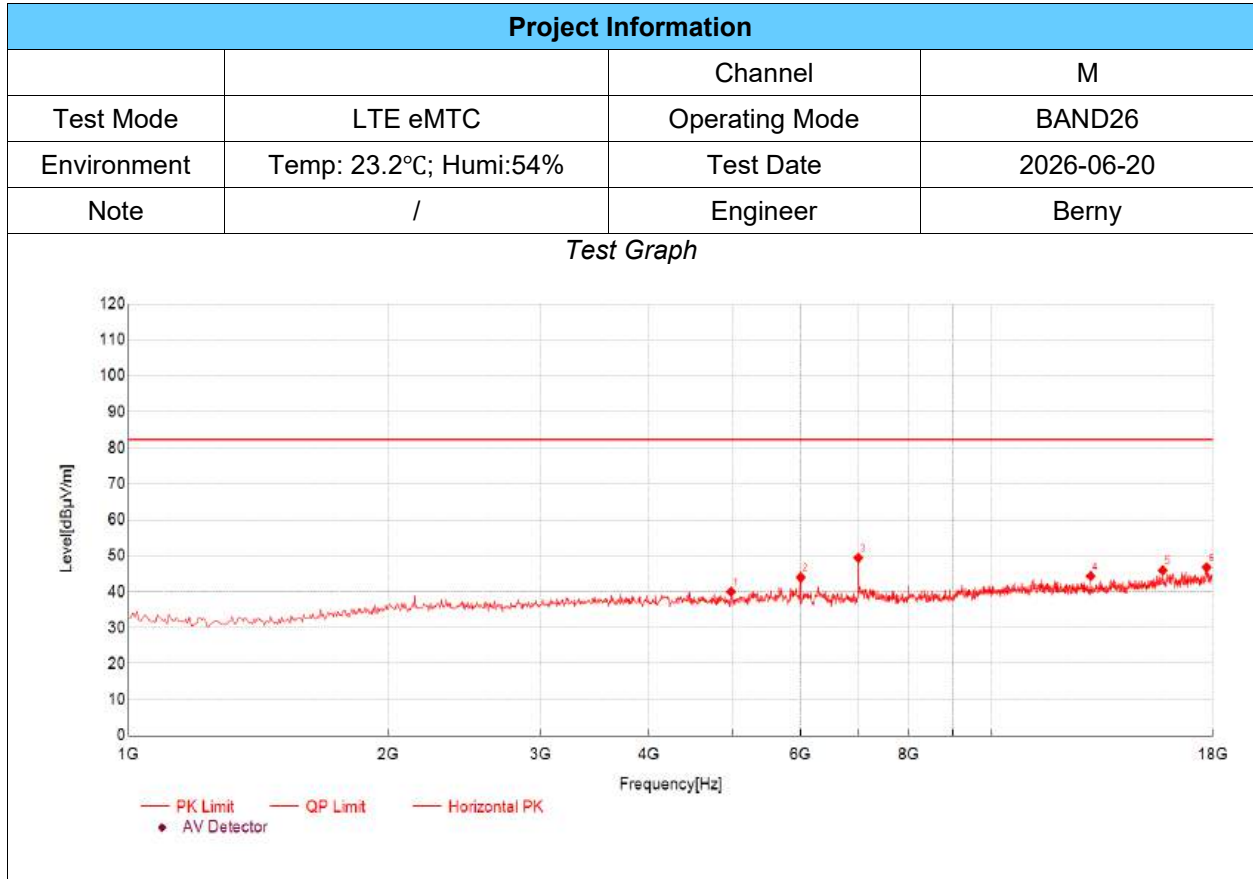

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 4984.99         | 51.14          | 39.98          | -11.16        | 82.30          | 42.32       | PK  | Horizontal | PASS    |
| 2                   | 5999.67         | 52.98          | 43.99          | -8.99         | 82.30          | 38.31       | PK  | Horizontal | PASS    |
| 3                   | 6997.33         | 57.05          | 49.43          | -7.62         | 82.30          | 32.87       | PK  | Horizontal | PASS    |
| 4                   | 13000.33        | 48.91          | 44.35          | -4.56         | 82.30          | 37.95       | PK  | Horizontal | PASS    |
| 5                   | 15755.25        | 47.91          | 45.92          | -1.99         | 82.30          | 36.38       | PK  | Horizontal | PASS    |
| 6                   | 17705.24        | 46.63          | 46.77          | 0.14          | 82.30          | 35.53       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

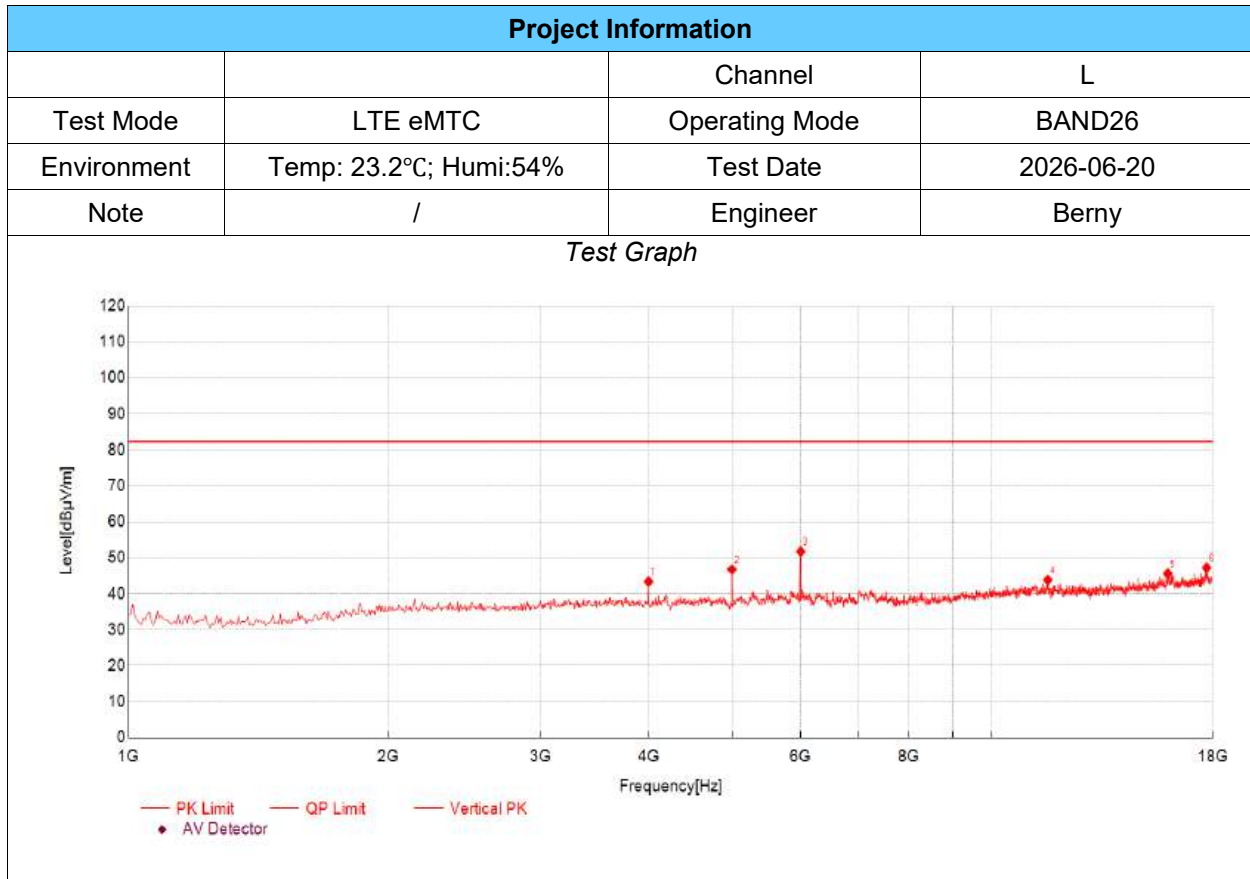


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 3998.67         | 56.72          | 43.42          | -13.30        | 82.30          | 38.88       | PK  | Vertical | PASS    |
| 2                   | 4996.33         | 57.84          | 46.74          | -11.10        | 82.30          | 35.56       | PK  | Vertical | PASS    |
| 3                   | 5999.67         | 60.72          | 51.73          | -8.99         | 82.30          | 30.57       | PK  | Vertical | PASS    |
| 4                   | 11594.53        | 48.06          | 43.82          | -4.24         | 82.30          | 38.48       | PK  | Vertical | PASS    |
| 5                   | 15964.99        | 47.08          | 45.60          | -1.48         | 82.30          | 36.70       | PK  | Vertical | PASS    |
| 6                   | 17705.24        | 47.08          | 47.22          | 0.14          | 82.30          | 35.08       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

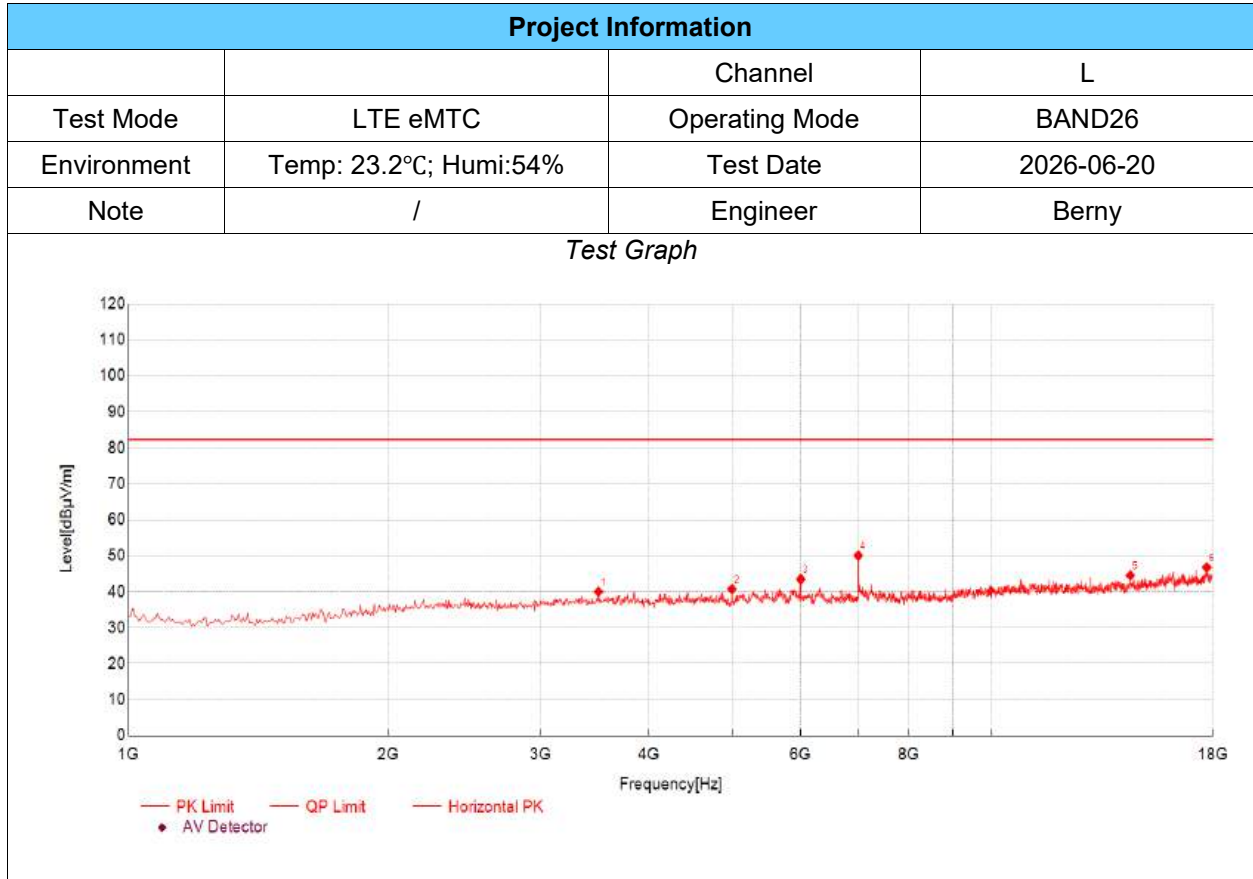


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 3499.83         | 54.28          | 39.99          | -14.29        | 82.30          | 42.31       | PK  | Horizontal | PASS    |
| 2                   | 4996.33         | 51.82          | 40.72          | -11.10        | 82.30          | 41.58       | PK  | Horizontal | PASS    |
| 3                   | 5999.67         | 52.49          | 43.50          | -8.99         | 82.30          | 38.80       | PK  | Horizontal | PASS    |
| 4                   | 6997.33         | 57.68          | 50.06          | -7.62         | 82.30          | 32.24       | PK  | Horizontal | PASS    |
| 5                   | 14451.48        | 47.61          | 44.54          | -3.07         | 82.30          | 37.76       | PK  | Horizontal | PASS    |
| 6                   | 17710.90        | 46.51          | 46.76          | 0.25          | 82.30          | 35.54       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

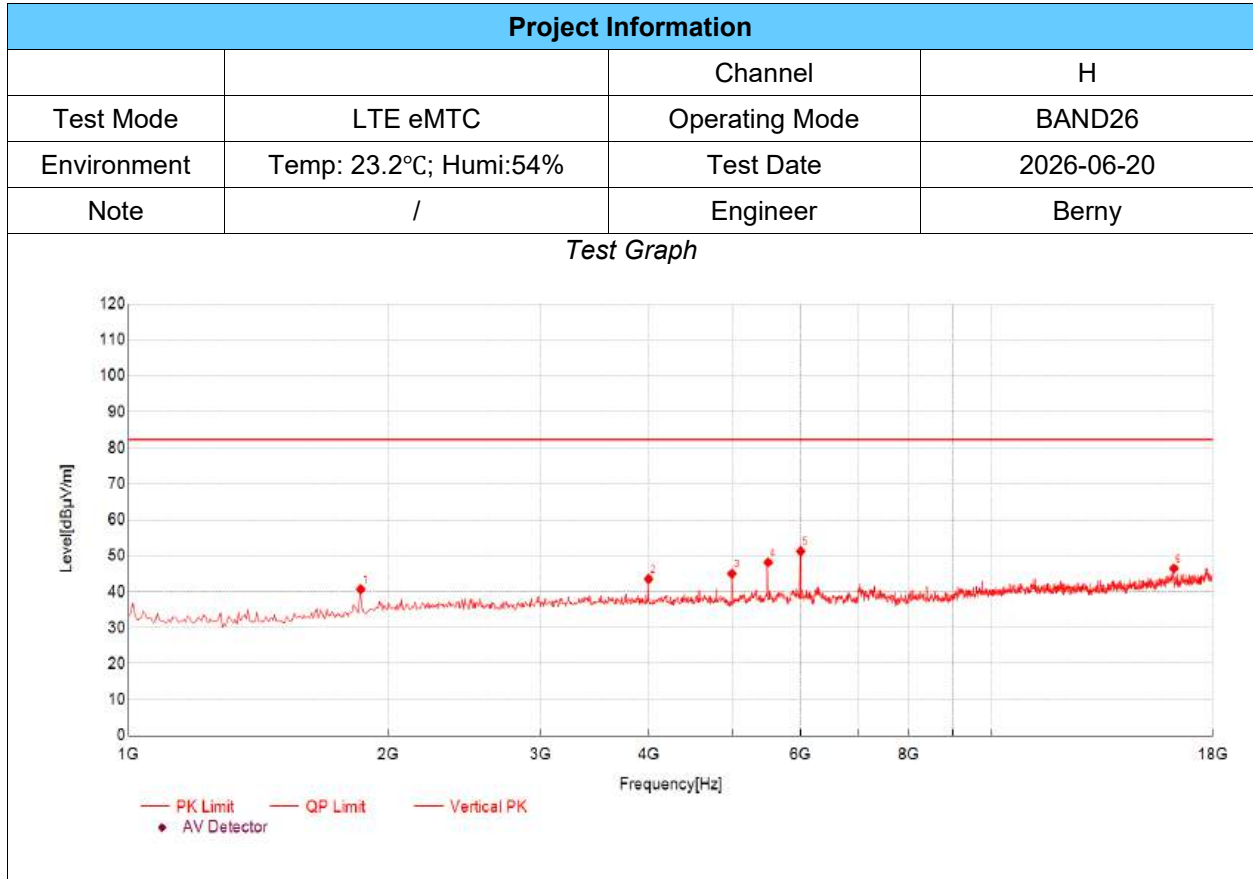


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1855.95         | 60.29          | 40.65          | -19.64        | 82.30          | 41.65       | PK  | Vertical | PASS    |
| 2                   | 3998.67         | 56.85          | 43.55          | -13.30        | 82.30          | 38.75       | PK  | Vertical | PASS    |
| 3                   | 4996.33         | 56.11          | 45.01          | -11.10        | 82.30          | 37.29       | PK  | Vertical | PASS    |
| 4                   | 5500.83         | 57.46          | 48.14          | -9.32         | 82.30          | 34.16       | PK  | Vertical | PASS    |
| 5                   | 5999.67         | 60.25          | 51.26          | -8.99         | 82.30          | 31.04       | PK  | Vertical | PASS    |
| 6                   | 16225.74        | 46.92          | 46.44          | -0.48         | 82.30          | 35.86       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

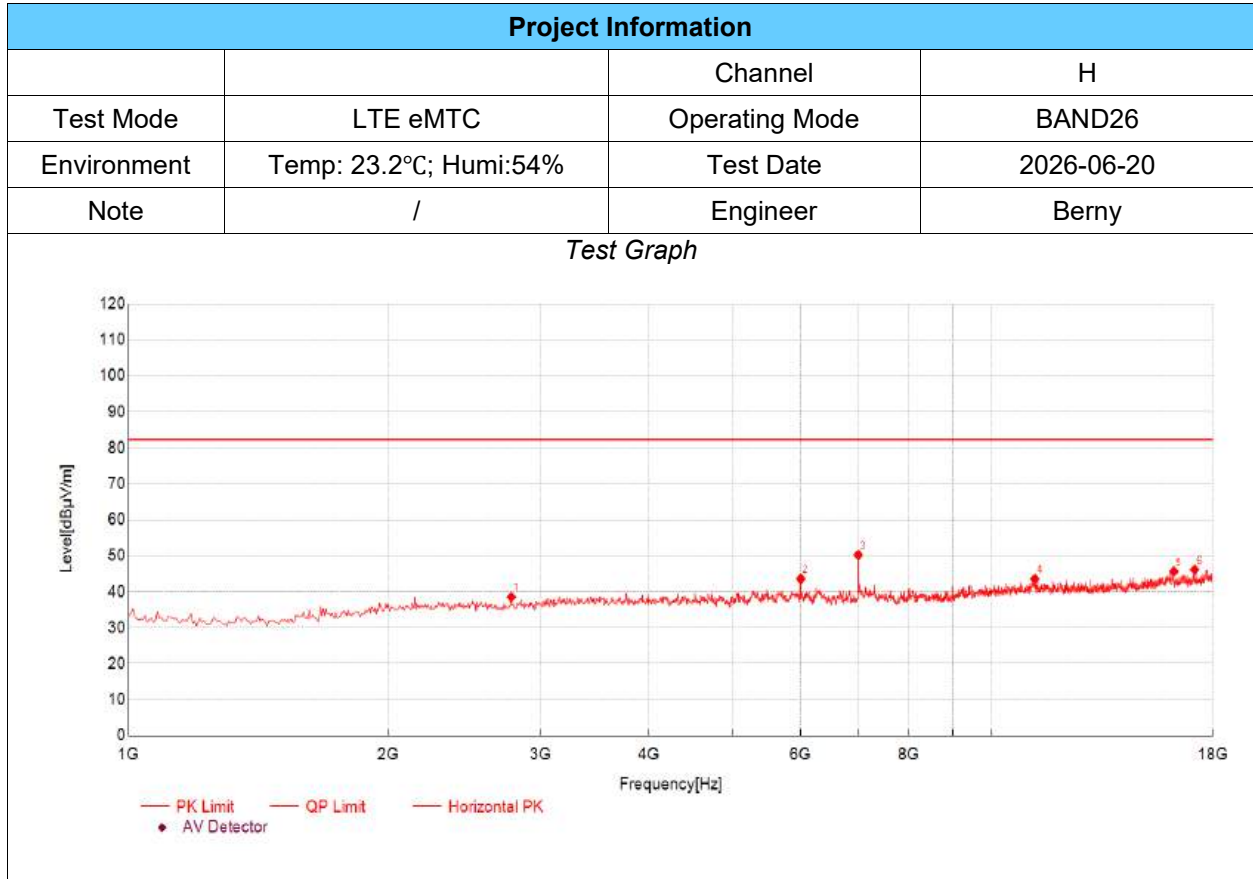

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2774.26         | 55.33          | 38.55          | -16.78        | 82.30          | 43.75       | PK  | Horizontal | PASS    |
| 2                   | 5999.67         | 52.59          | 43.60          | -8.99         | 82.30          | 38.70       | PK  | Horizontal | PASS    |
| 3                   | 6997.33         | 57.83          | 50.21          | -7.62         | 82.30          | 32.09       | PK  | Horizontal | PASS    |
| 4                   | 11203.40        | 47.42          | 43.58          | -3.84         | 82.30          | 38.72       | PK  | Horizontal | PASS    |
| 5                   | 16225.74        | 46.10          | 45.62          | -0.48         | 82.30          | 36.68       | PK  | Horizontal | PASS    |
| 6                   | 17149.72        | 46.46          | 46.10          | -0.36         | 82.30          | 36.20       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

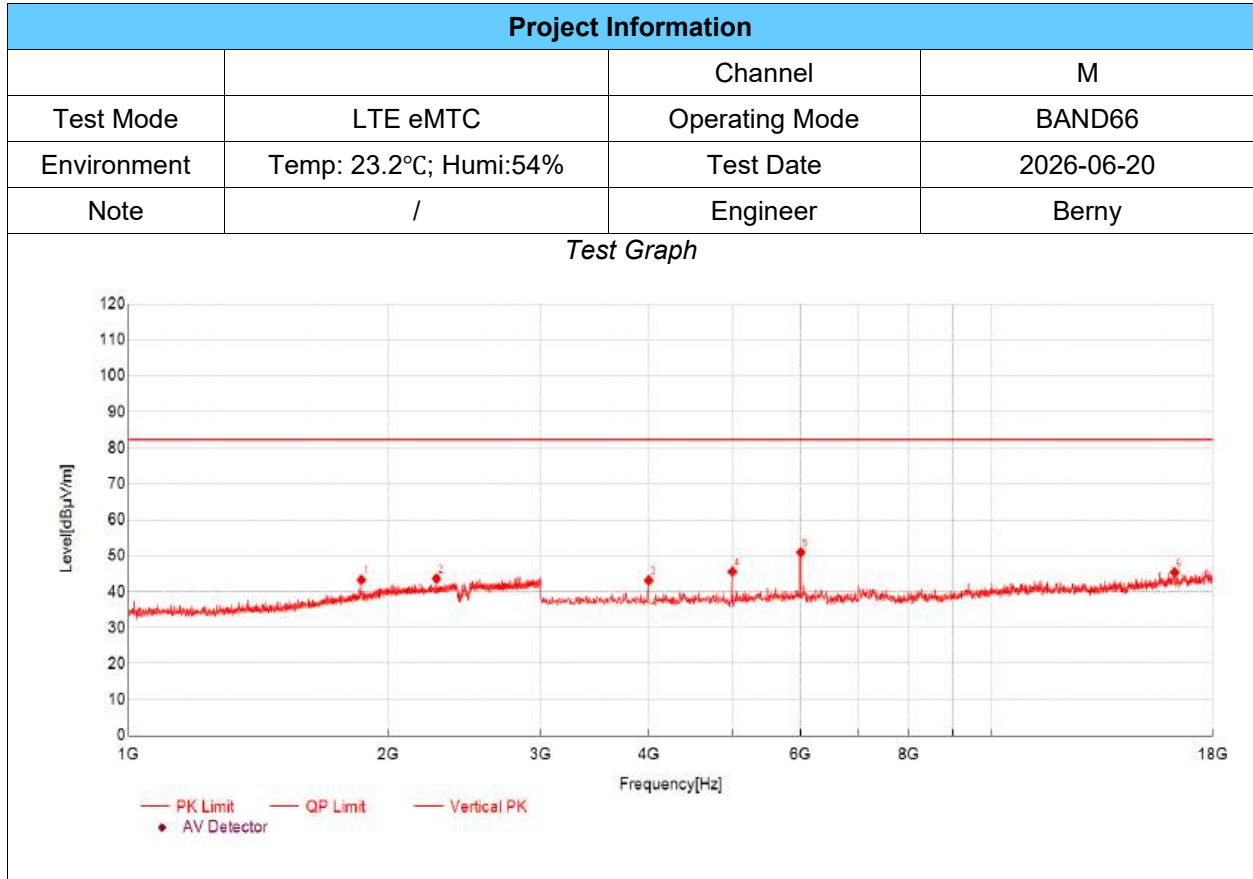


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1859.62         | 53.75          | 43.32          | -10.43        | 82.30          | 38.98       | PK  | Vertical | PASS    |
| 2                   | 2273.09         | 52.84          | 43.68          | -9.16         | 82.30          | 38.62       | PK  | Vertical | PASS    |
| 3                   | 4000.33         | 56.51          | 43.16          | -13.35        | 82.30          | 39.14       | PK  | Vertical | PASS    |
| 4                   | 5000.67         | 56.75          | 45.57          | -11.18        | 82.30          | 36.73       | PK  | Vertical | PASS    |
| 5                   | 6001.00         | 59.79          | 50.93          | -8.86         | 82.30          | 31.37       | PK  | Vertical | PASS    |
| 6                   | 16259.42        | 46.21          | 45.38          | -0.83         | 82.30          | 36.92       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

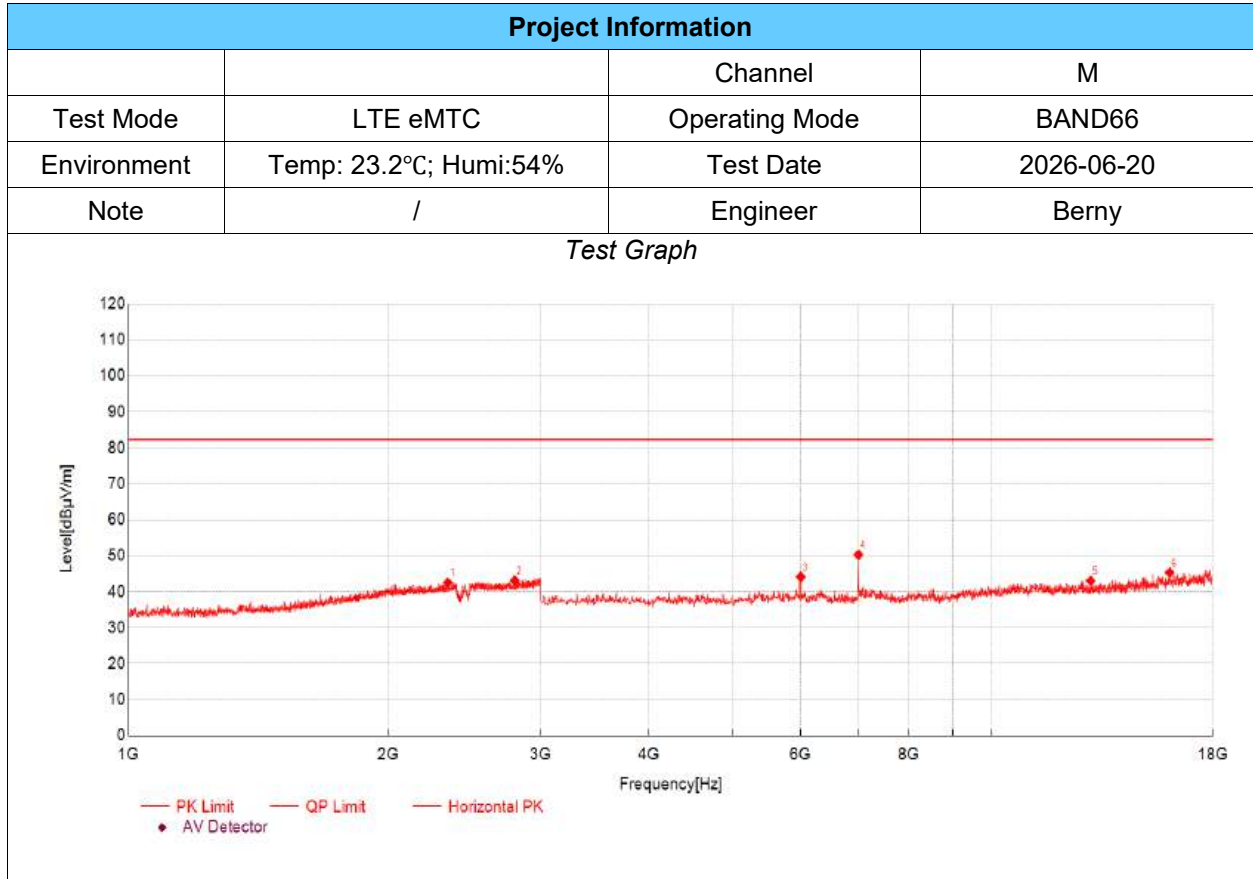

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2341.78         | 51.11          | 42.53          | -8.58         | 82.30          | 39.77       | PK  | Horizontal | PASS    |
| 2                   | 2800.60         | 51.50          | 43.10          | -8.40         | 82.30          | 39.20       | PK  | Horizontal | PASS    |
| 3                   | 6001.00         | 52.99          | 44.13          | -8.86         | 82.30          | 38.17       | PK  | Horizontal | PASS    |
| 4                   | 7001.33         | 58.07          | 50.26          | -7.81         | 82.30          | 32.04       | PK  | Horizontal | PASS    |
| 5                   | 12998.33        | 47.60          | 43.06          | -4.54         | 82.30          | 39.24       | PK  | Horizontal | PASS    |
| 6                   | 16049.35        | 46.94          | 45.29          | -1.65         | 82.30          | 37.01       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m


## TX Radiated Test Result

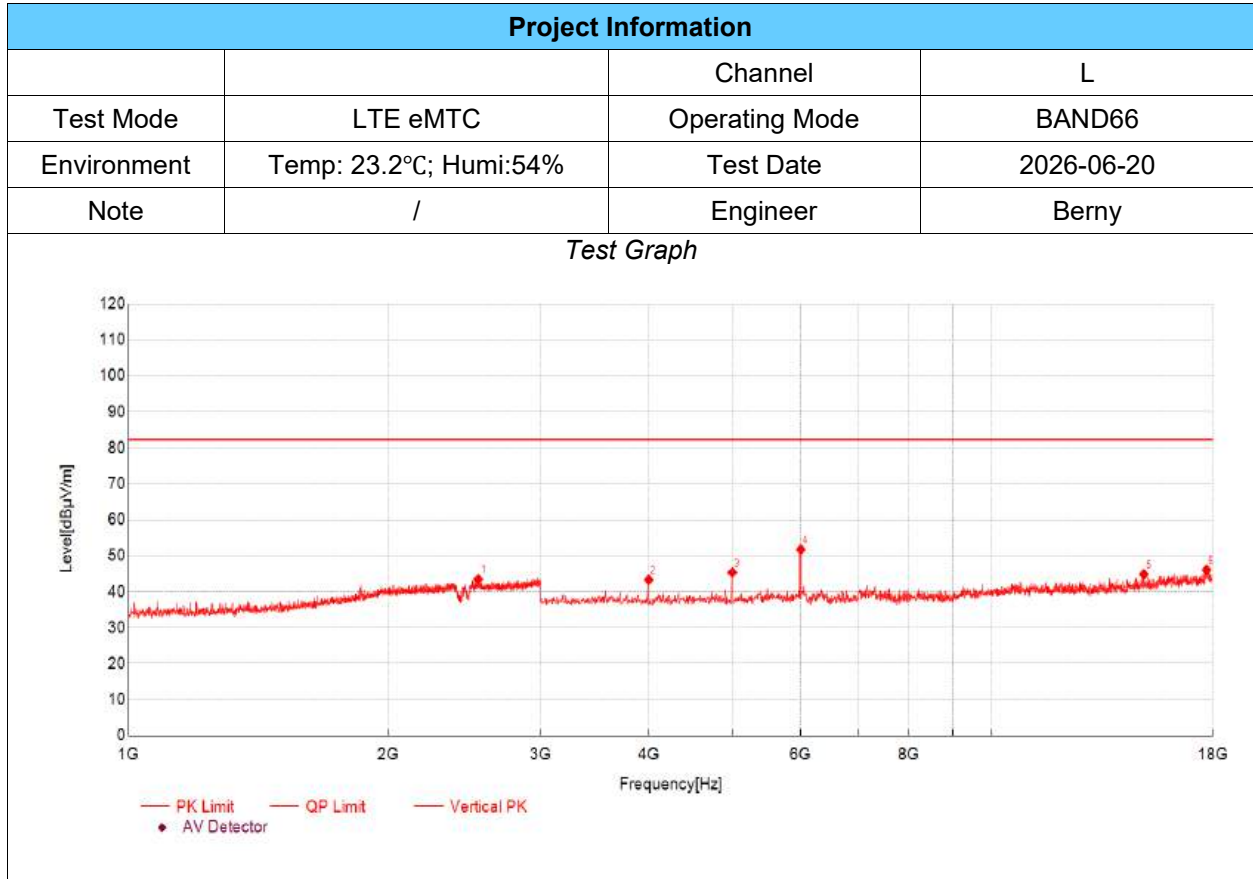

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2541.18         | 51.89          | 43.50          | -8.39         | 82.30          | 38.80       | PK  | Vertical | PASS    |
| 2                   | 4000.33         | 56.71          | 43.36          | -13.35        | 82.30          | 38.94       | PK  | Vertical | PASS    |
| 3                   | 5000.67         | 56.51          | 45.33          | -11.18        | 82.30          | 36.97       | PK  | Vertical | PASS    |
| 4                   | 6001.00         | 60.59          | 51.73          | -8.86         | 82.30          | 30.57       | PK  | Vertical | PASS    |
| 5                   | 14978.99        | 47.69          | 44.83          | -2.86         | 82.30          | 37.47       | PK  | Vertical | PASS    |
| 6                   | 17699.90        | 45.89          | 46.06          | 0.17          | 82.30          | 36.24       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level  
(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

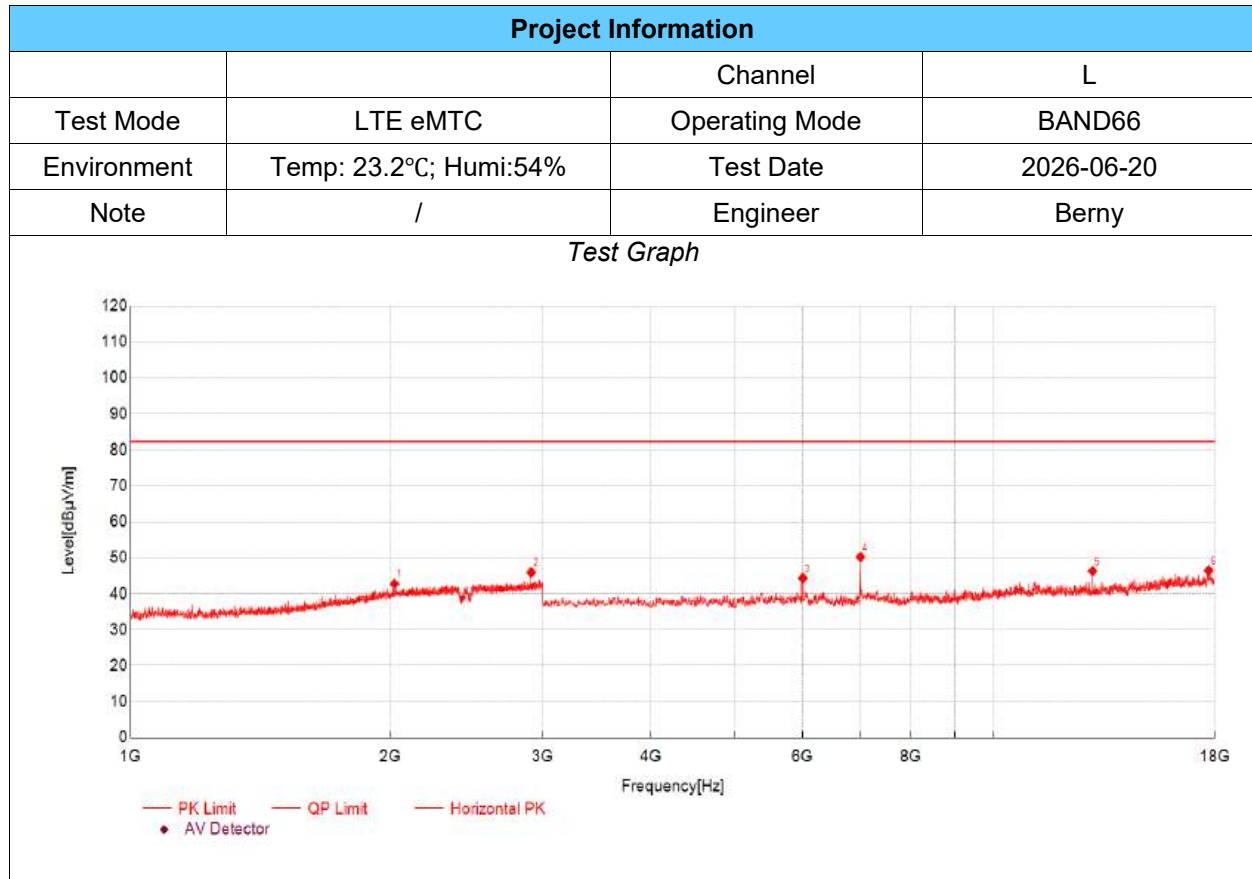


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2020.34         | 51.77          | 42.75          | -9.02         | 82.30          | 39.55       | PK  | Horizontal | PASS    |
| 2                   | 2908.64         | 53.61          | 45.92          | -7.69         | 82.30          | 36.38       | PK  | Horizontal | PASS    |
| 3                   | 6001.00         | 53.18          | 44.32          | -8.86         | 82.30          | 37.98       | PK  | Horizontal | PASS    |
| 4                   | 7001.33         | 58.02          | 50.21          | -7.81         | 82.30          | 32.09       | PK  | Horizontal | PASS    |
| 5                   | 12998.33        | 50.80          | 46.26          | -4.54         | 82.30          | 36.04       | PK  | Horizontal | PASS    |
| 6                   | 17704.90        | 46.36          | 46.43          | 0.07          | 82.30          | 35.87       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

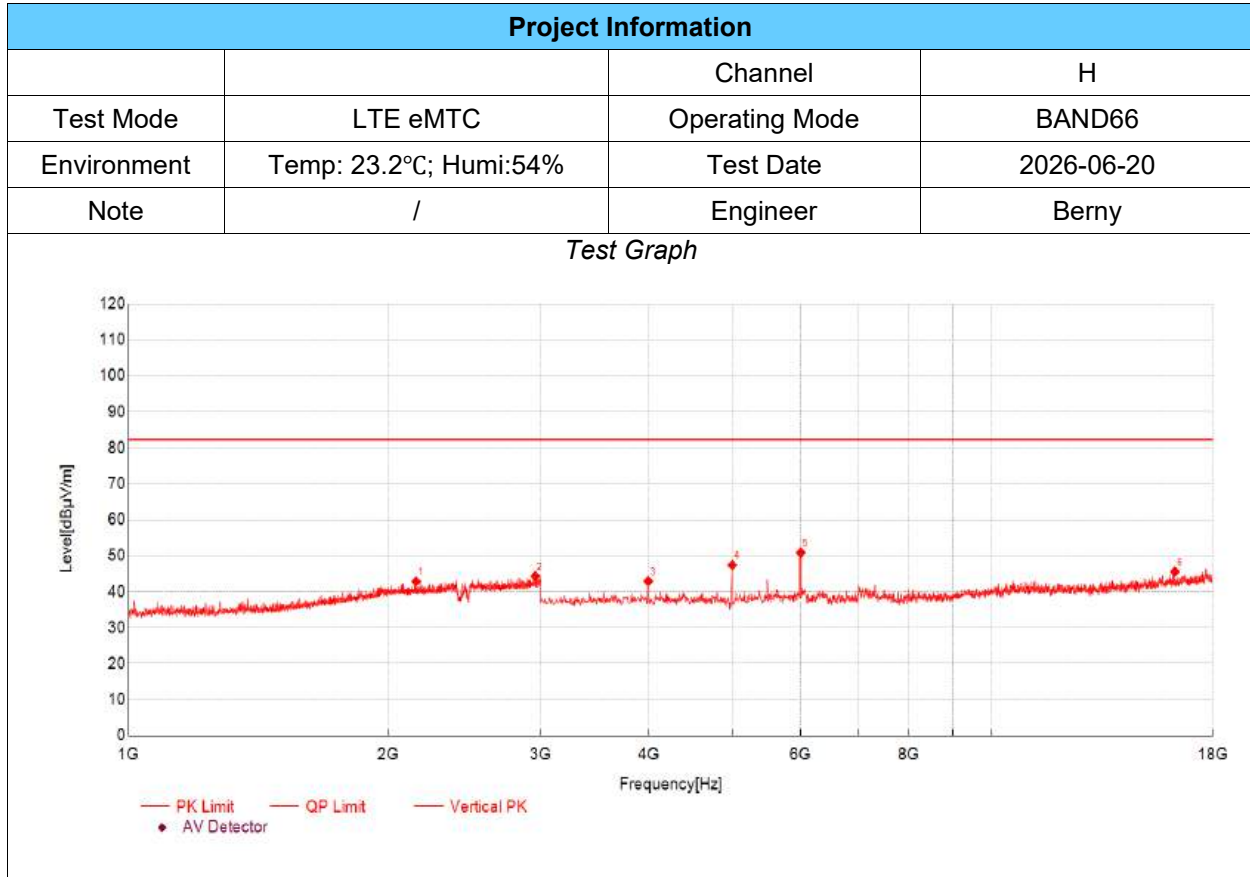


| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2151.72         | 51.91          | 42.86          | -9.05         | 82.30          | 39.44       | PK  | Vertical | PASS    |
| 2                   | 2957.32         | 51.73          | 44.34          | -7.39         | 82.30          | 37.96       | PK  | Vertical | PASS    |
| 3                   | 3995.33         | 56.23          | 42.92          | -13.31        | 82.30          | 39.38       | PK  | Vertical | PASS    |
| 4                   | 5000.67         | 58.58          | 47.40          | -11.18        | 82.30          | 34.90       | PK  | Vertical | PASS    |
| 5                   | 6001.00         | 59.72          | 50.86          | -8.86         | 82.30          | 31.44       | PK  | Vertical | PASS    |
| 6                   | 16269.42        | 46.66          | 45.55          | -1.11         | 82.30          | 36.75       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

# TX Radiated Test Result

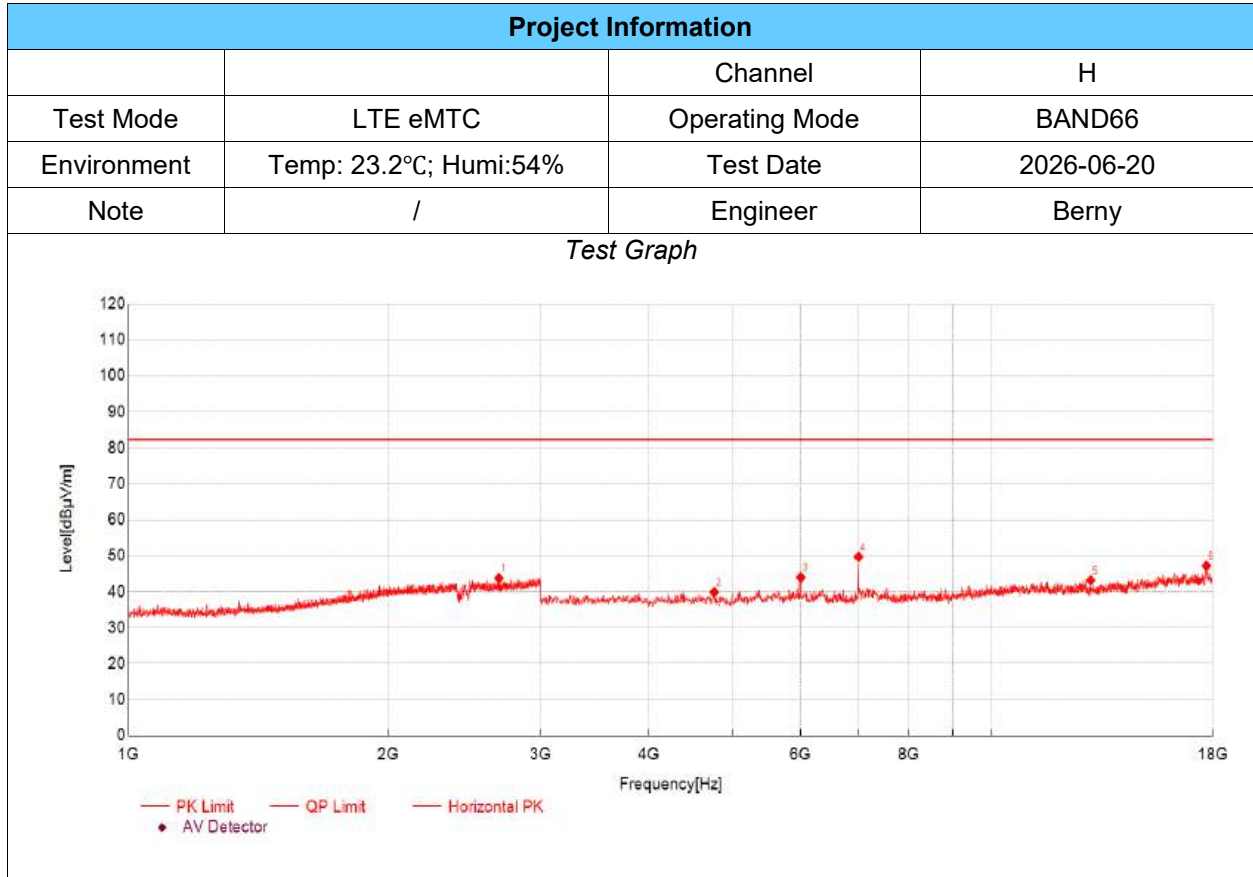

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2683.89         | 52.09          | 43.74          | -8.35         | 82.30          | 38.56       | PK  | Horizontal | PASS    |
| 2                   | 4765.59         | 51.21          | 39.87          | -11.34        | 82.30          | 42.43       | PK  | Horizontal | PASS    |
| 3                   | 6001.00         | 52.85          | 43.99          | -8.86         | 82.30          | 38.31       | PK  | Horizontal | PASS    |
| 4                   | 7001.33         | 57.52          | 49.71          | -7.81         | 82.30          | 32.59       | PK  | Horizontal | PASS    |
| 5                   | 12998.33        | 47.73          | 43.19          | -4.54         | 82.30          | 39.11       | PK  | Horizontal | PASS    |
| 6                   | 17694.90        | 46.99          | 47.20          | 0.21          | 82.30          | 35.10       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

(3)Limit= -13dBm+95.25=82.25 dBuV/m

For 9KHz to 30MHz and above 18 GHz, a pre-scan was performed, and the result was 20 dB lower than the limit line, the test data was not shown in the report.

### 7.3. Receiver Spurious Emissions

#### RULE PART(S)

RSS-Gen 7.3

#### LIMIT

RSS-Gen 7.3

specifies that: Radiated emission measurements shall be performed with the receiver antenna connected to the receiver antenna ports. The search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator, intermediate or carrier frequency), or 30 MHz, whichever is higher, to at least five times the highest tunable or local oscillator frequency, whichever is higher, without exceeding 40 GHz.

Spurious emissions from receivers shall not exceed the radiated emissions limits shown in table 3.

| Table 3 – Receiver radiated emissions limits |                                                                 |
|----------------------------------------------|-----------------------------------------------------------------|
| Frequency (MHz)                              | Field strength ( $\mu\text{V/m}$ at 3 metres) <sup>Note 1</sup> |
| 30 – 88                                      | 100                                                             |
| 88 – 216                                     | 150                                                             |
| 216 – 960                                    | 200                                                             |
| Above 960                                    | 500                                                             |

**Note 1:** Measurements for compliance with the limits in table 3 may be performed at distances other than 3 metres, in accordance with [section 6.6](#).

#### TEST PROCEDURE

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014.

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for

detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before

the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz/ VBW=300 kHz/ Sweep= AUTO


Above 1GHz:

(a) PEAK detector: RBW=1MHz VBW=3MHz/ Sweep= AUTO


(b) AVERAGE detector: RBW=1MHz / VBW=3MHz / Sweep=AUTO

## TEST SETUP

### Test Setup for Below 1 GHz

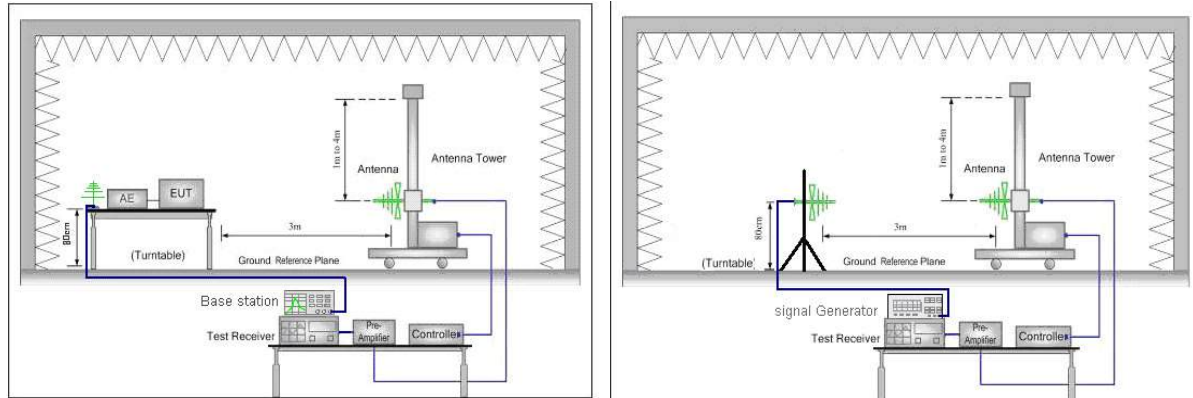

### Test Setup for Above 1 GHz

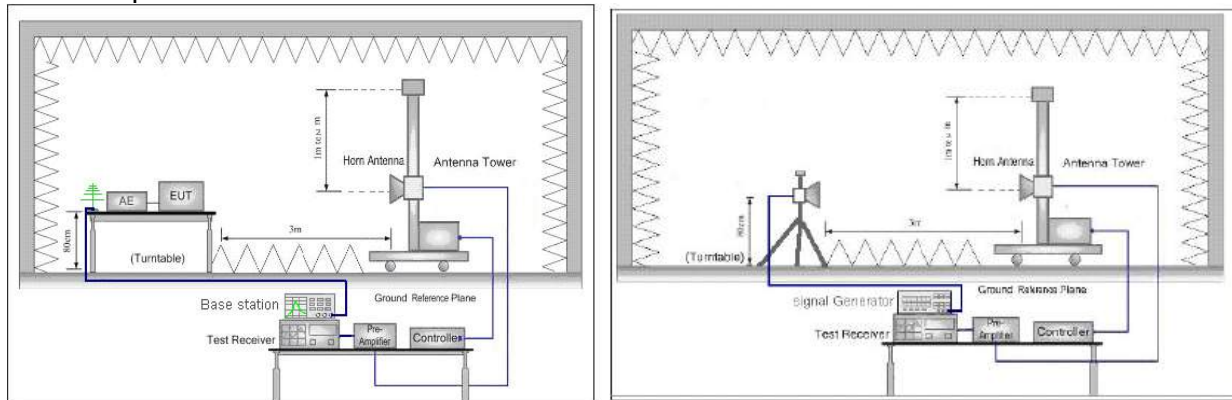


## TEST ENVIRONMENT

|                     |        |                   |     |
|---------------------|--------|-------------------|-----|
| Temperature         | 23.6°C | Relative Humidity | 53% |
| Atmosphere Pressure | 101kPa |                   |     |

## RESULTS


Undesirable radiated Spurious Emission below 1GHz (30MHz to 1GHz)

All modes have been tested and the worst result as bellow:

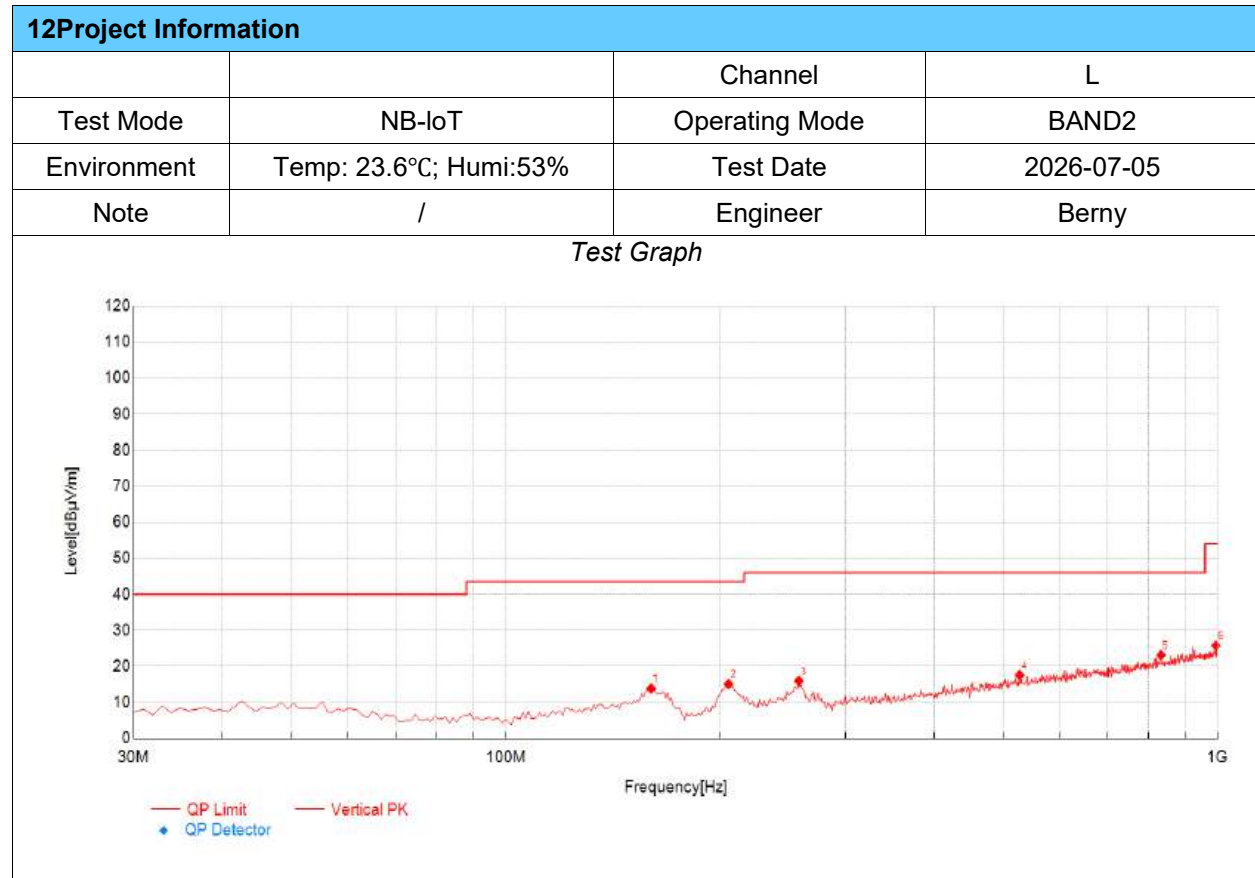

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 159.98          | 31.96          | 13.86          | -18.10        | 43.50          | 29.64       | PK  | Vertical | PASS    |
| 2                   | 205.57          | 37.24          | 15.10          | -22.14        | 43.50          | 28.40       | PK  | Vertical | PASS    |
| 3                   | 257.95          | 36.11          | 15.99          | -20.12        | 46.00          | 30.01       | PK  | Vertical | PASS    |
| 4                   | 526.64          | 30.09          | 17.56          | -12.53        | 46.00          | 28.44       | PK  | Vertical | PASS    |
| 5                   | 832.19          | 29.75          | 23.13          | -6.62         | 46.00          | 22.87       | PK  | Vertical | PASS    |
| 6                   | 994.18          | 29.48          | 25.77          | -3.71         | 54.00          | 28.23       | PK  | Vertical | PASS    |


Note:(1)Level=Reading+Factor  
(2)Margin=Limit-Level

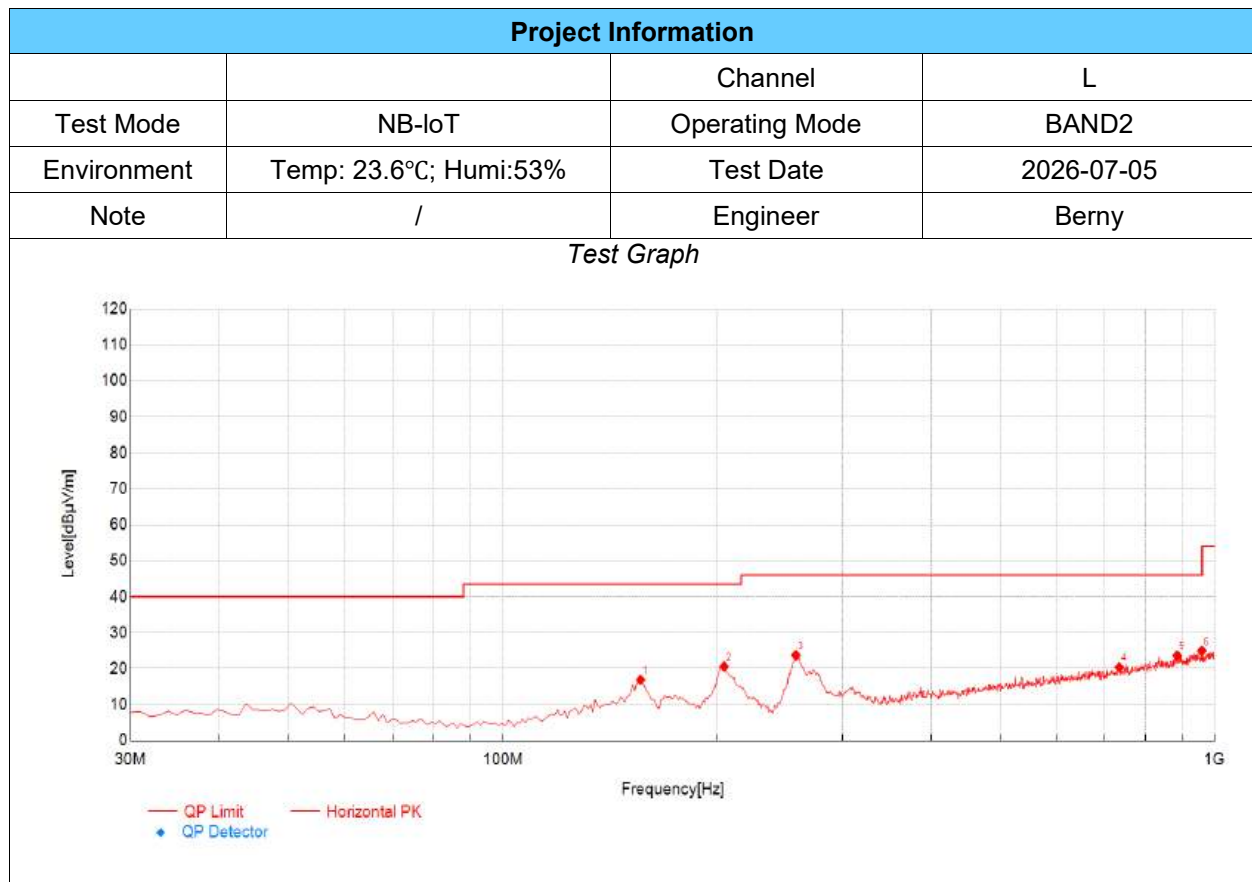

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 156.10          | 34.97          | 16.93          | -18.04        | 43.50          | 26.57       | PK  | Horizontal | PASS    |
| 2                   | 204.60          | 42.80          | 20.60          | -22.20        | 43.50          | 22.90       | PK  | Horizontal | PASS    |
| 3                   | 257.95          | 43.87          | 23.75          | -20.12        | 46.00          | 22.25       | PK  | Horizontal | PASS    |
| 4                   | 734.22          | 29.04          | 20.41          | -8.63         | 46.00          | 25.59       | PK  | Horizontal | PASS    |
| 5                   | 885.54          | 29.03          | 23.65          | -5.38         | 46.00          | 22.35       | PK  | Horizontal | PASS    |
| 6                   | 959.26          | 29.33          | 24.96          | -4.37         | 46.00          | 21.04       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

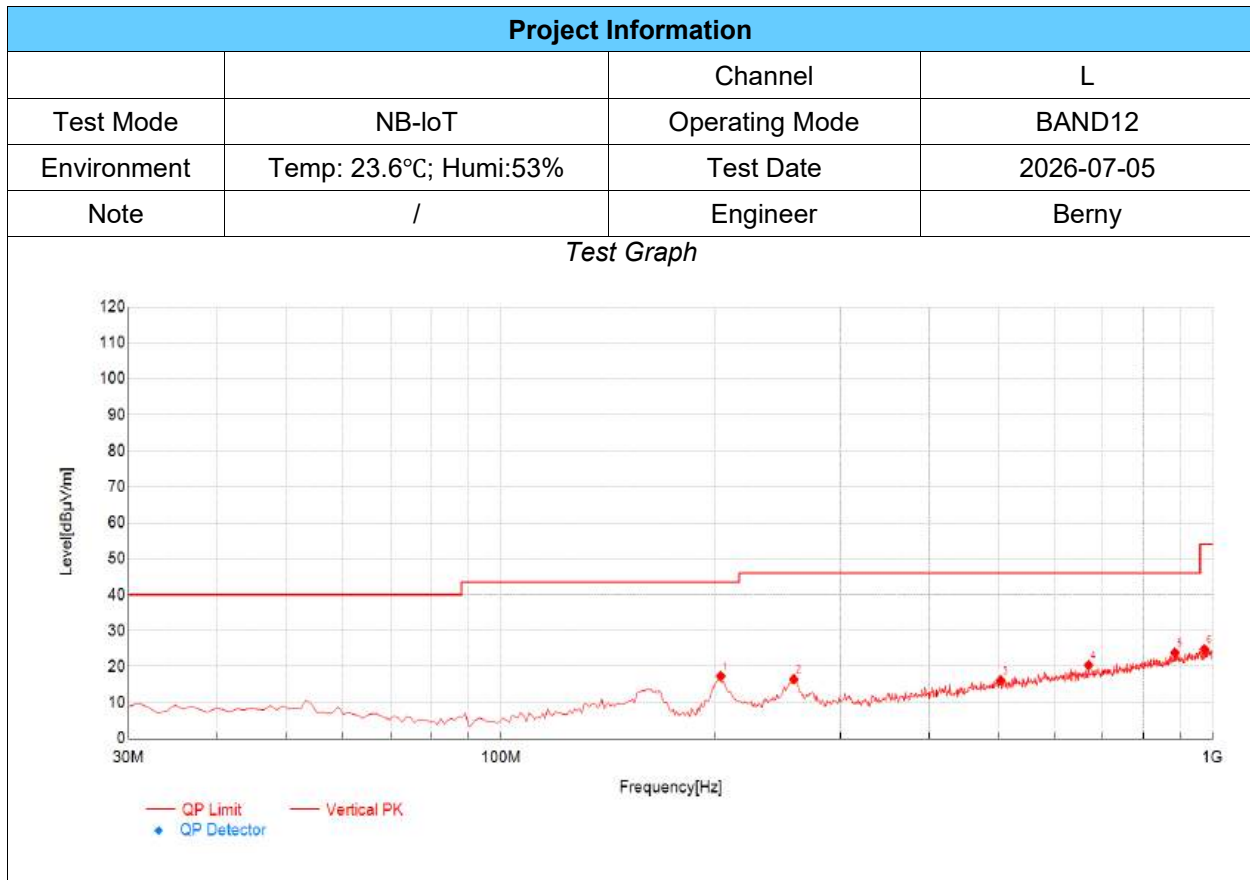

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 203.63          | 39.63          | 17.39          | -22.24        | 43.50          | 26.11       | PK  | Vertical | PASS    |
| 2                   | 257.95          | 36.64          | 16.52          | -20.12        | 46.00          | 29.48       | PK  | Vertical | PASS    |
| 3                   | 503.36          | 29.24          | 16.19          | -13.05        | 46.00          | 29.81       | PK  | Vertical | PASS    |
| 4                   | 669.23          | 30.07          | 20.44          | -9.63         | 46.00          | 25.56       | PK  | Vertical | PASS    |
| 5                   | 884.57          | 29.27          | 23.87          | -5.40         | 46.00          | 22.13       | PK  | Vertical | PASS    |
| 6                   | 972.84          | 29.09          | 24.88          | -4.21         | 54.00          | 29.12       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

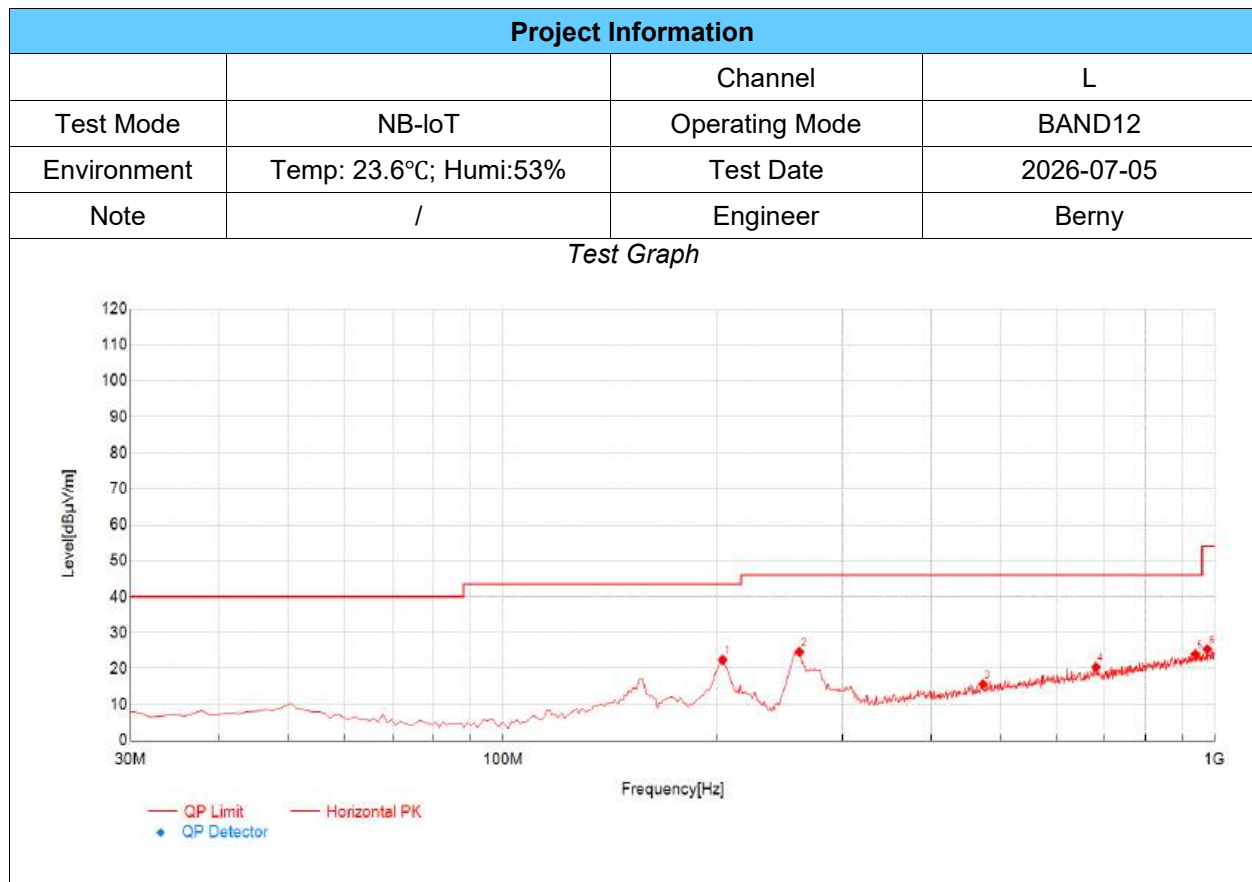

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 203.63          | 44.70          | 22.46          | -22.24        | 43.50          | 21.04       | PK  | Horizontal | PASS    |
| 2                   | 260.86          | 44.71          | 24.66          | -20.05        | 46.00          | 21.34       | PK  | Horizontal | PASS    |
| 3                   | 472.32          | 29.36          | 15.66          | -13.70        | 46.00          | 30.34       | PK  | Horizontal | PASS    |
| 4                   | 680.87          | 29.99          | 20.45          | -9.54         | 46.00          | 25.55       | PK  | Horizontal | PASS    |
| 5                   | 938.89          | 28.49          | 24.01          | -4.48         | 46.00          | 21.99       | PK  | Horizontal | PASS    |
| 6                   | 975.75          | 29.55          | 25.41          | -4.14         | 54.00          | 28.59       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

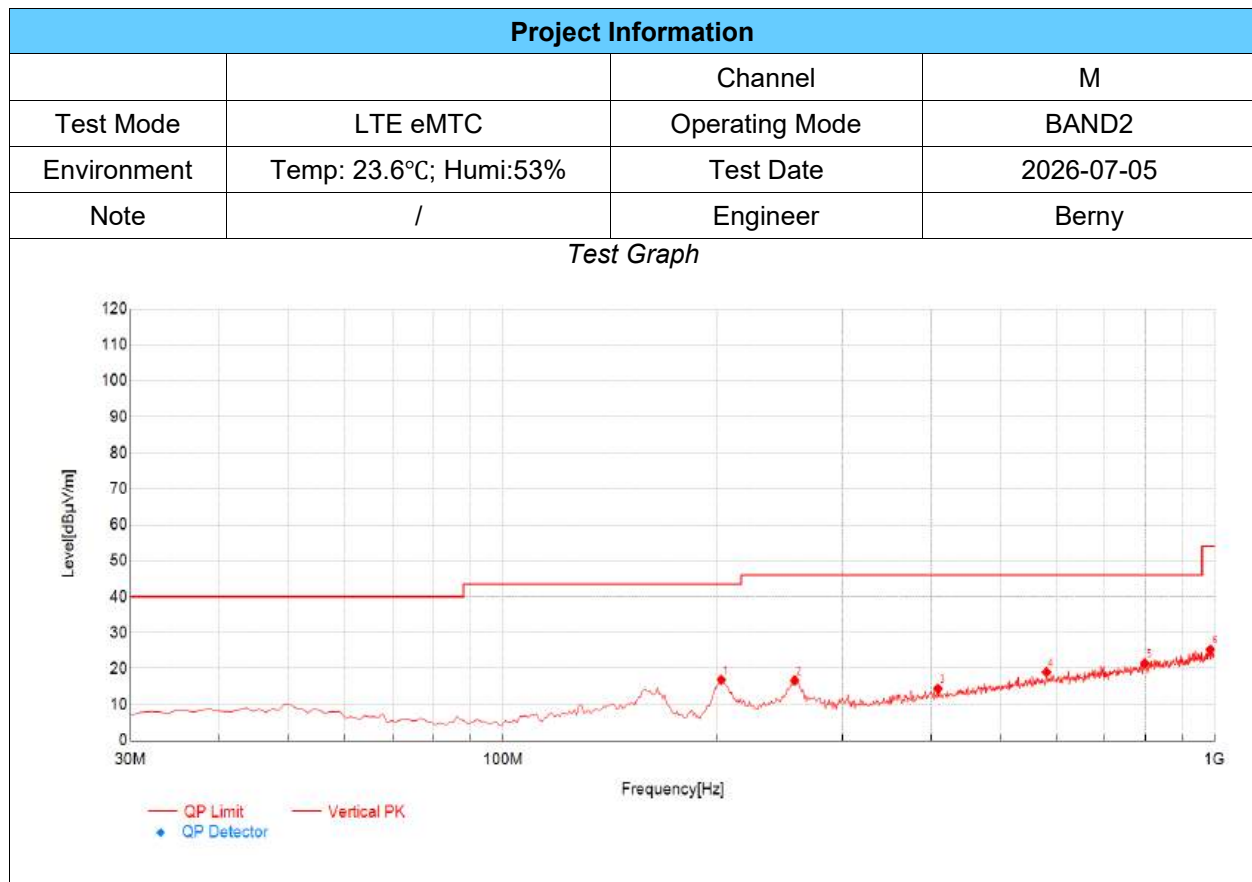

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 202.66          | 39.20          | 16.92          | -22.28        | 43.50          | 26.58       | PK  | Vertical | PASS    |
| 2                   | 256.98          | 36.85          | 16.71          | -20.14        | 46.00          | 29.29       | PK  | Vertical | PASS    |
| 3                   | 408.30          | 29.93          | 14.44          | -15.49        | 46.00          | 31.56       | PK  | Vertical | PASS    |
| 4                   | 579.99          | 30.20          | 19.03          | -11.17        | 46.00          | 26.97       | PK  | Vertical | PASS    |
| 5                   | 797.27          | 28.84          | 21.46          | -7.38         | 46.00          | 24.54       | PK  | Vertical | PASS    |
| 6                   | 986.42          | 29.22          | 25.34          | -3.88         | 54.00          | 28.66       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

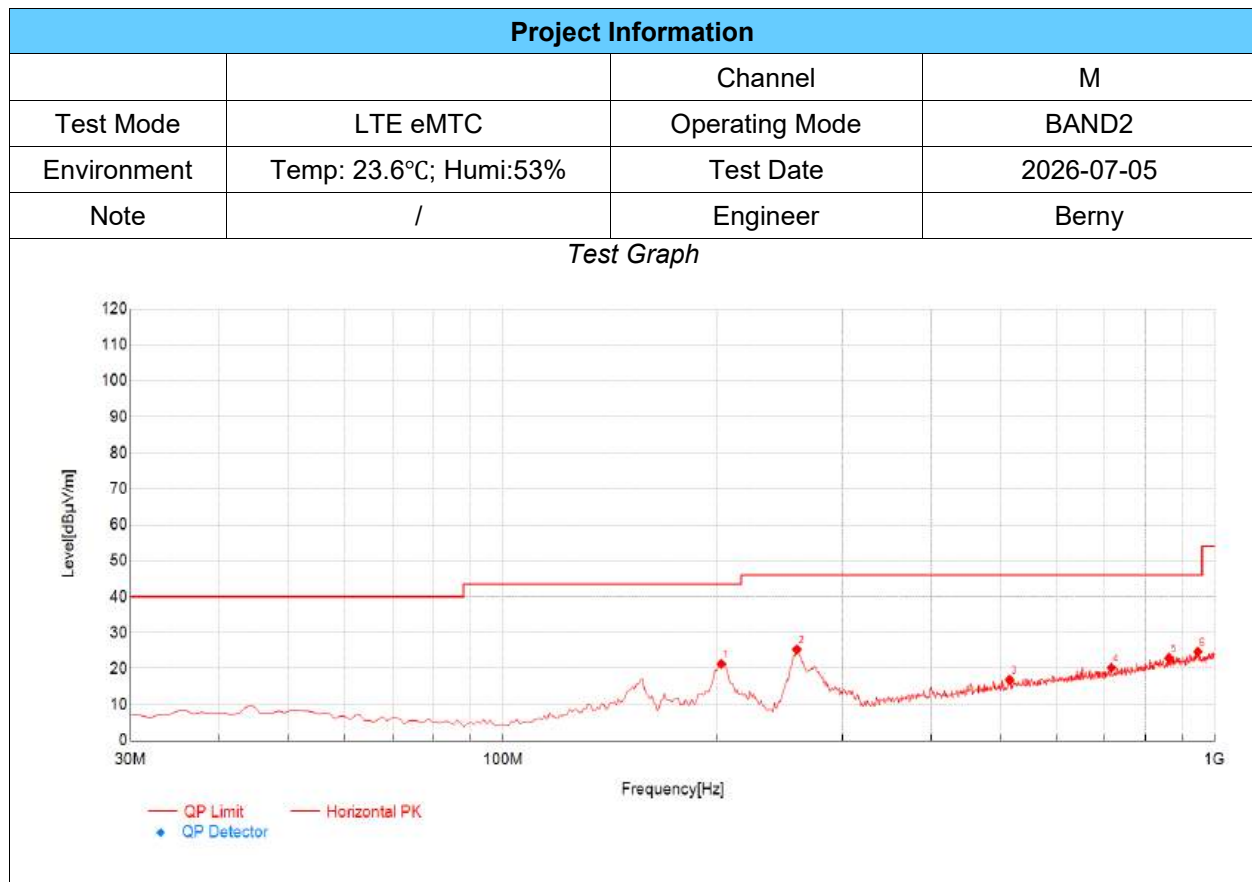

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 202.66          | 43.63          | 21.35          | -22.28        | 43.50          | 22.15       | PK  | Horizontal | PASS    |
| 2                   | 258.92          | 45.47          | 25.36          | -20.11        | 46.00          | 20.64       | PK  | Horizontal | PASS    |
| 3                   | 515.00          | 29.71          | 16.89          | -12.82        | 46.00          | 29.11       | PK  | Horizontal | PASS    |
| 4                   | 715.79          | 29.34          | 20.24          | -9.10         | 46.00          | 25.76       | PK  | Horizontal | PASS    |
| 5                   | 862.26          | 28.93          | 22.93          | -6.00         | 46.00          | 23.07       | PK  | Horizontal | PASS    |
| 6                   | 946.65          | 28.93          | 24.69          | -4.24         | 46.00          | 21.31       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

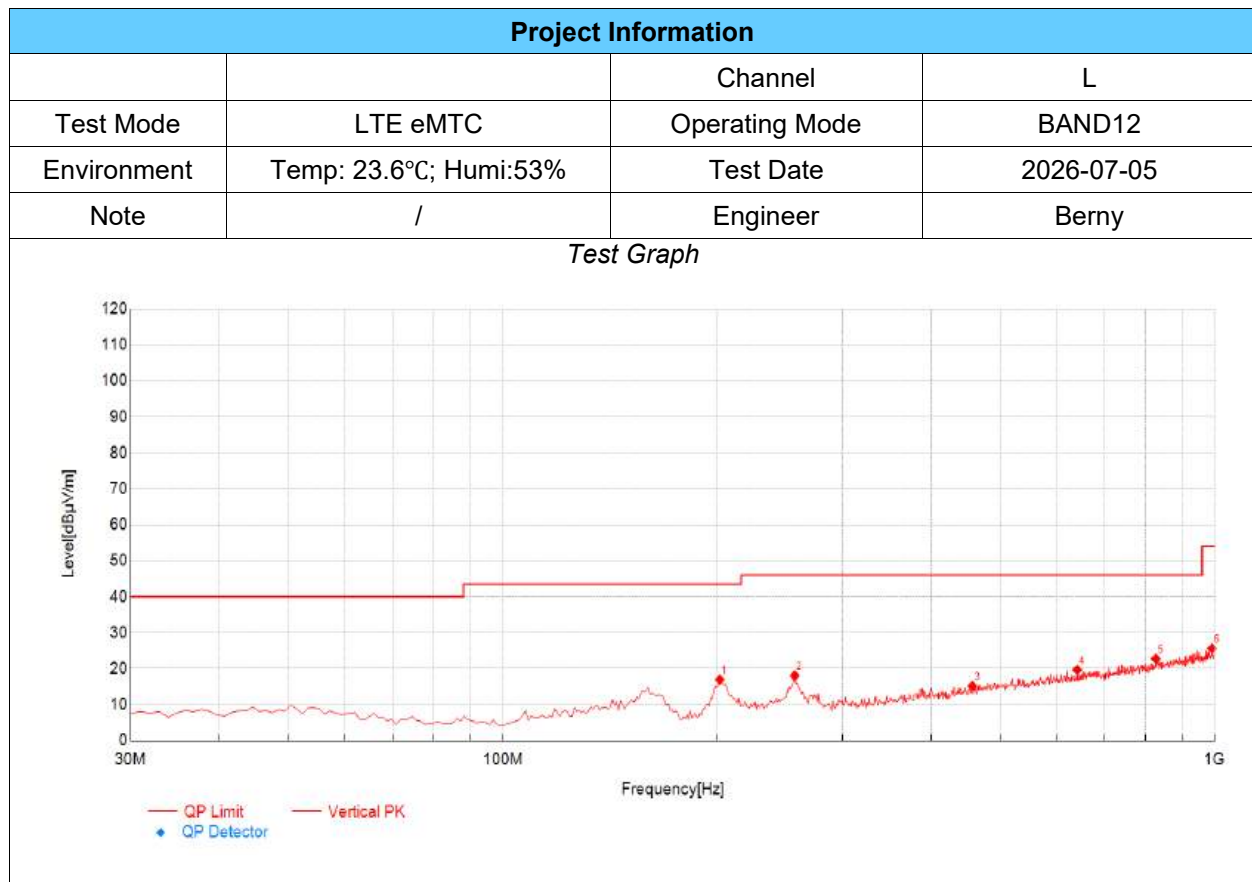

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 201.69          | 39.29          | 16.97          | -22.32        | 43.50          | 26.53       | PK  | Vertical | PASS    |
| 2                   | 256.98          | 38.21          | 18.07          | -20.14        | 46.00          | 27.93       | PK  | Vertical | PASS    |
| 3                   | 456.80          | 29.32          | 15.19          | -14.13        | 46.00          | 30.81       | PK  | Vertical | PASS    |
| 4                   | 641.10          | 29.92          | 19.66          | -10.26        | 46.00          | 26.34       | PK  | Vertical | PASS    |
| 5                   | 826.37          | 29.46          | 22.76          | -6.70         | 46.00          | 23.24       | PK  | Vertical | PASS    |
| 6                   | 991.27          | 29.45          | 25.62          | -3.83         | 54.00          | 28.38       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

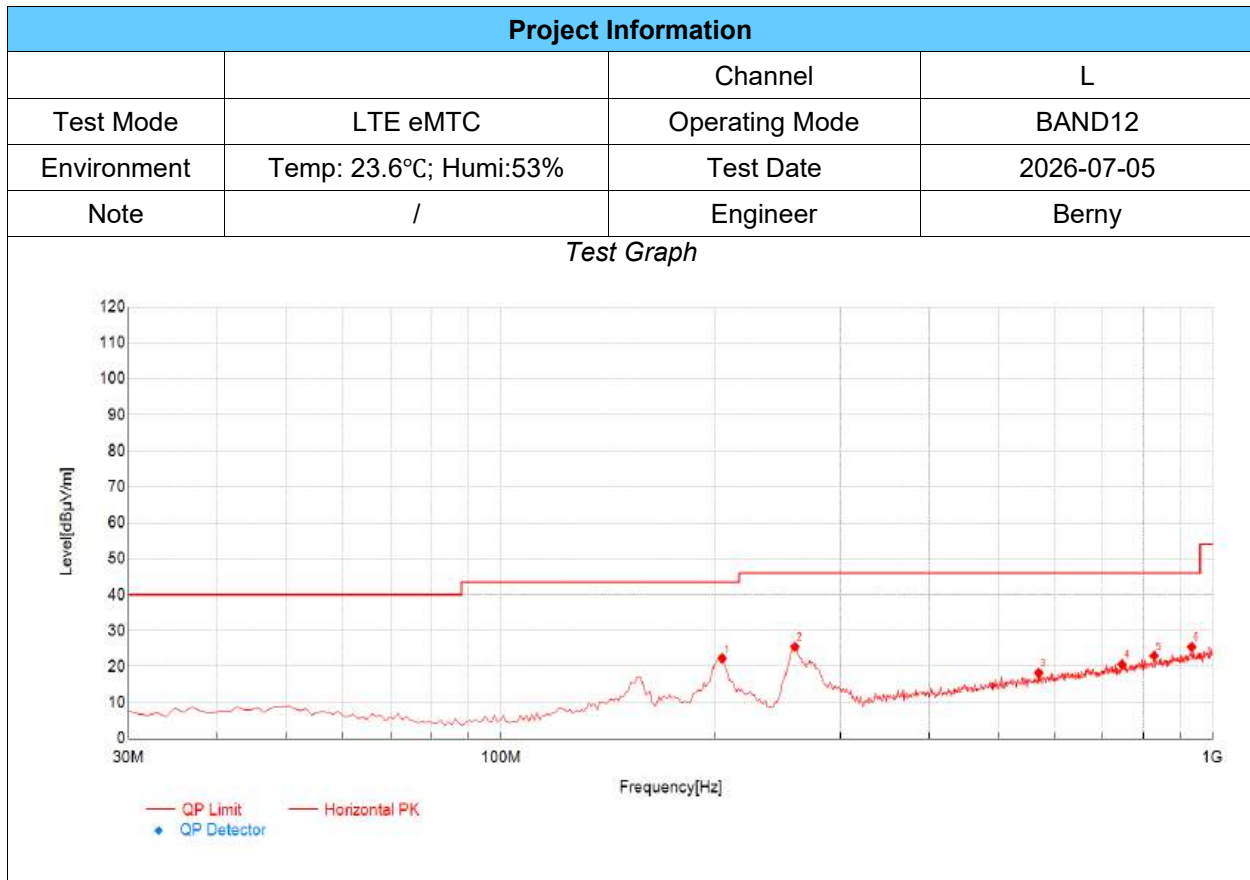


| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 204.60          | 44.53          | 22.33          | -22.20        | 43.50          | 21.17       | PK  | Horizontal | PASS    |
| 2                   | 258.92          | 45.64          | 25.53          | -20.11        | 46.00          | 20.47       | PK  | Horizontal | PASS    |
| 3                   | 569.32          | 29.74          | 18.26          | -11.48        | 46.00          | 27.74       | PK  | Horizontal | PASS    |
| 4                   | 745.86          | 28.99          | 20.66          | -8.33         | 46.00          | 25.34       | PK  | Horizontal | PASS    |
| 5                   | 827.34          | 29.75          | 23.06          | -6.69         | 46.00          | 22.94       | PK  | Horizontal | PASS    |
| 6                   | 934.04          | 30.19          | 25.50          | -4.69         | 46.00          | 20.50       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

## Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)


All modes have been tested and the worst result as bellow:

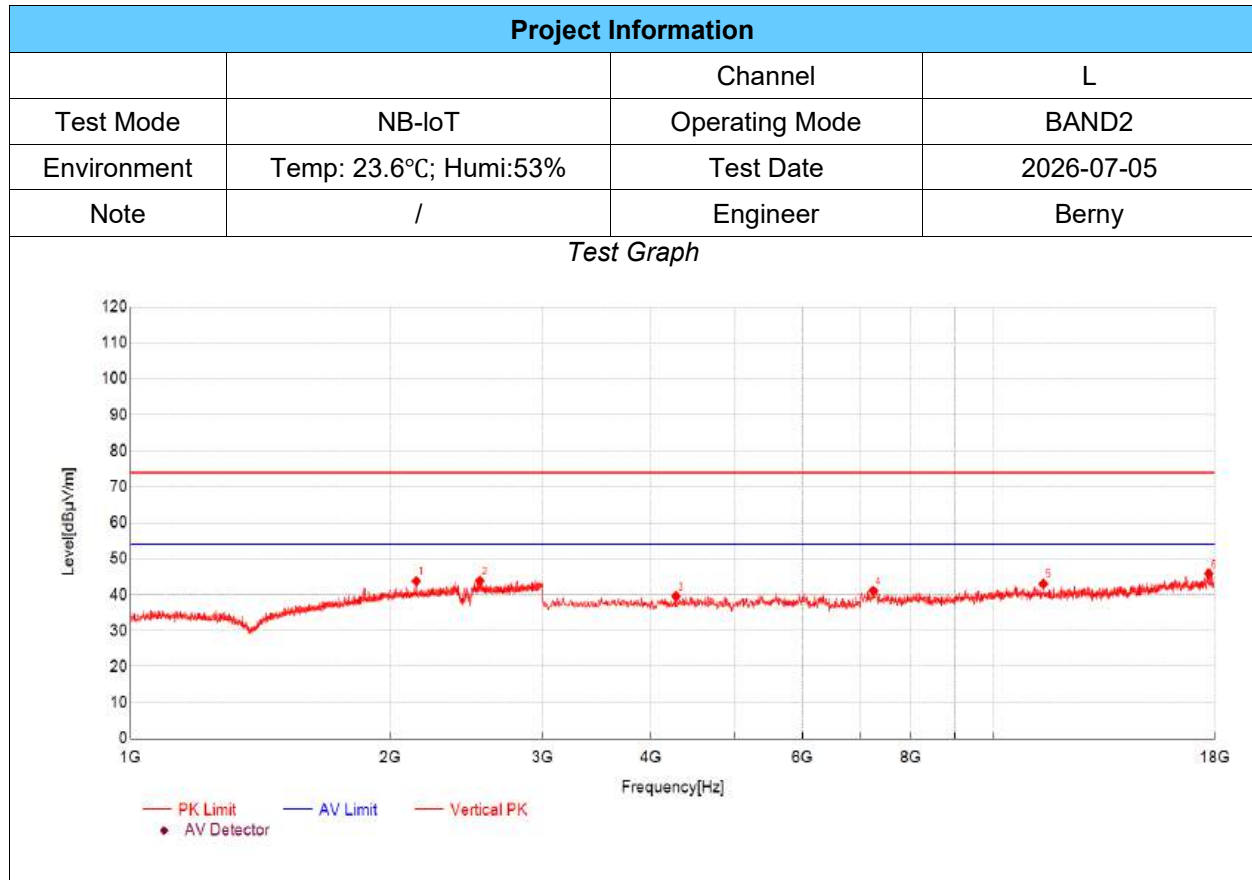

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2141.71         | 52.83          | 43.78          | -9.05         | 74.00          | 30.22       | PK  | Vertical | PASS    |
| 2                   | 2538.51         | 52.34          | 43.89          | -8.45         | 74.00          | 30.11       | PK  | Vertical | PASS    |
| 3                   | 4280.43         | 52.17          | 39.56          | -12.61        | 74.00          | 34.44       | PK  | Vertical | PASS    |
| 4                   | 7241.41         | 49.25          | 41.10          | -8.15         | 74.00          | 32.90       | PK  | Vertical | PASS    |
| 5                   | 11397.80        | 47.32          | 43.02          | -4.30         | 74.00          | 30.98       | PK  | Vertical | PASS    |
| 6                   | 17709.90        | 45.90          | 45.87          | -0.03         | 74.00          | 28.13       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

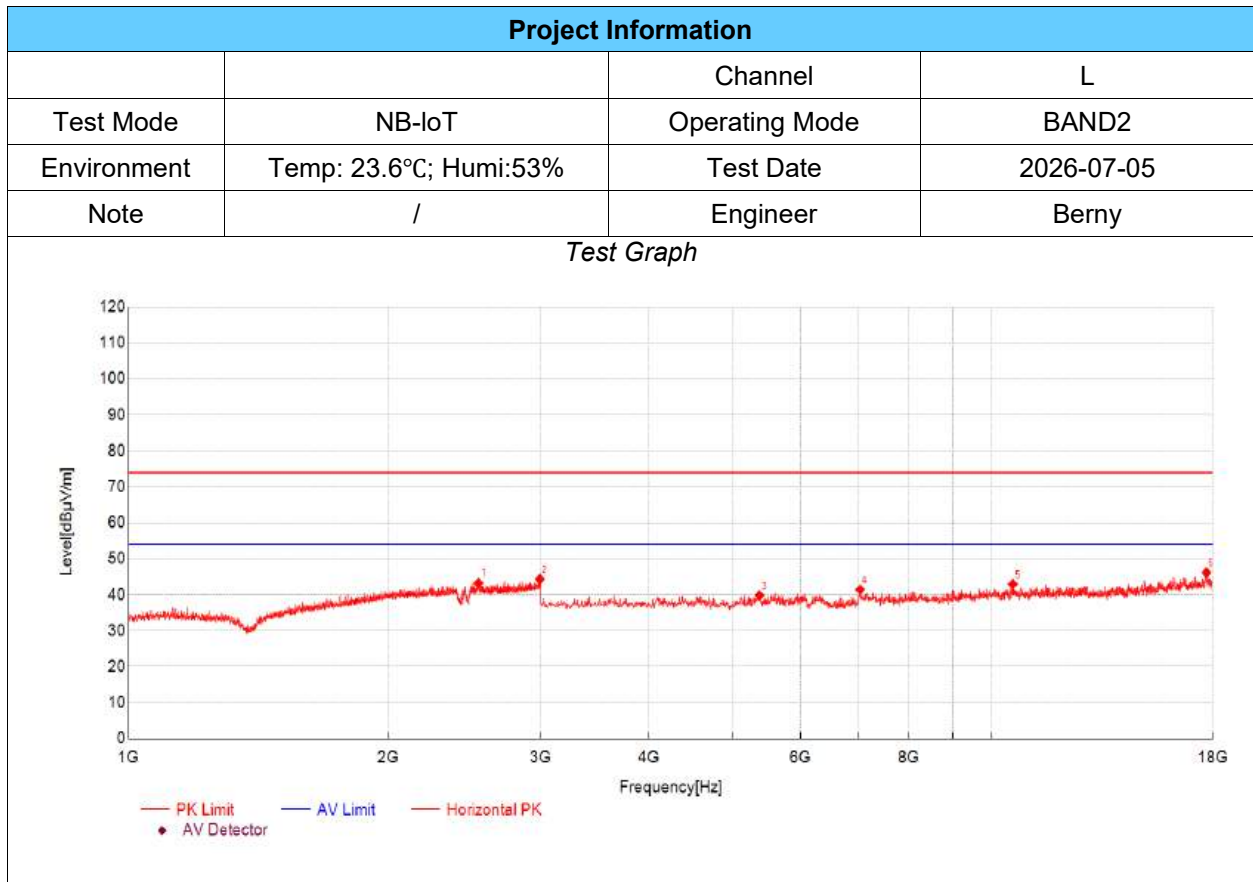

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2541.85         | 51.59          | 43.22          | -8.37         | 74.00          | 30.78       | PK  | Horizontal | PASS    |
| 2                   | 2994.00         | 51.34          | 44.34          | -7.00         | 74.00          | 29.66       | PK  | Horizontal | PASS    |
| 3                   | 5375.79         | 48.97          | 39.81          | -9.16         | 74.00          | 34.19       | PK  | Horizontal | PASS    |
| 4                   | 7031.34         | 49.14          | 41.40          | -7.74         | 74.00          | 32.60       | PK  | Horizontal | PASS    |
| 5                   | 10562.52        | 48.05          | 42.97          | -5.08         | 74.00          | 31.03       | PK  | Horizontal | PASS    |
| 6                   | 17694.90        | 45.93          | 46.14          | 0.21          | 74.00          | 27.86       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

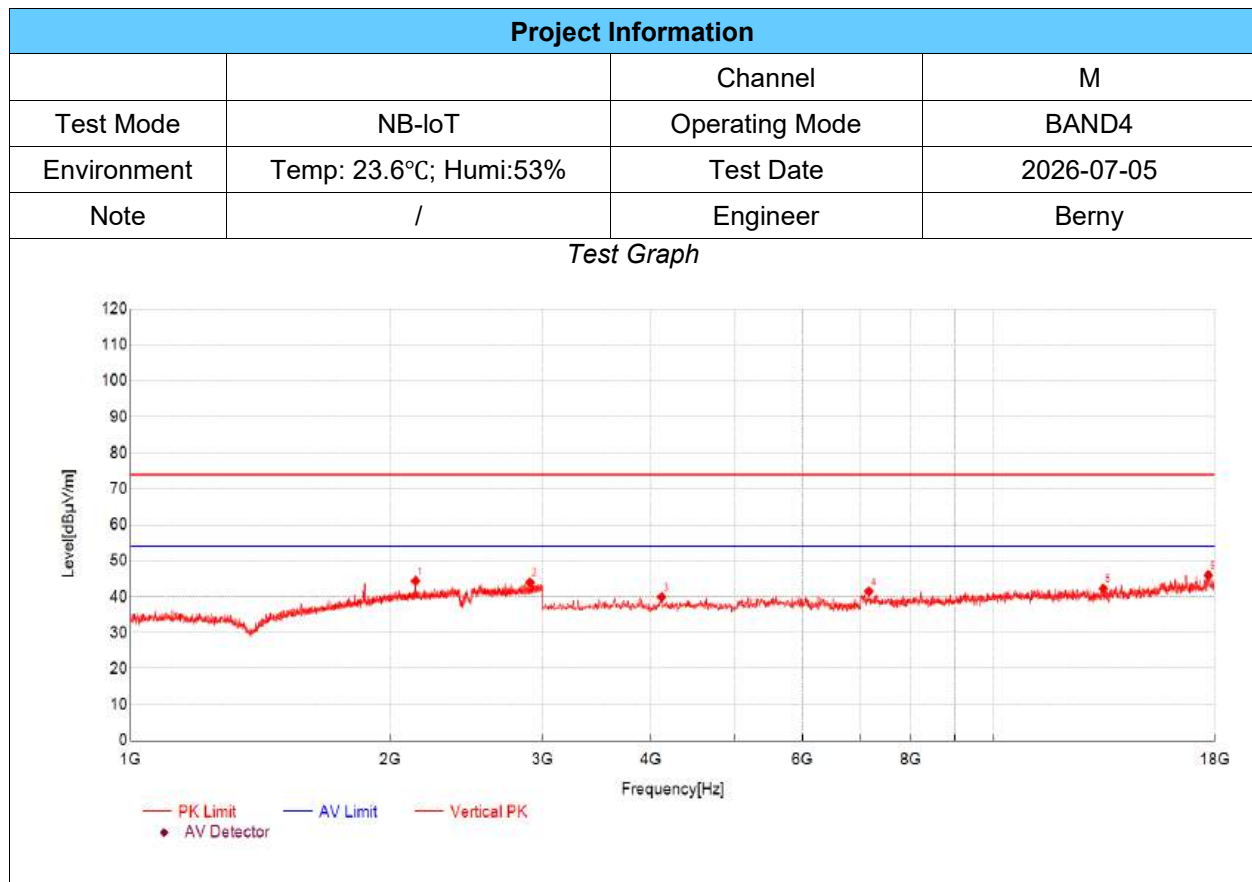

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2137.71         | 53.44          | 44.40          | -9.04         | 74.00          | 29.60       | PK  | Vertical | PASS    |
| 2                   | 2899.30         | 51.84          | 43.96          | -7.88         | 74.00          | 30.04       | PK  | Vertical | PASS    |
| 3                   | 4120.37         | 52.46          | 39.89          | -12.57        | 74.00          | 34.11       | PK  | Vertical | PASS    |
| 4                   | 7161.39         | 49.42          | 41.49          | -7.93         | 74.00          | 32.51       | PK  | Vertical | PASS    |
| 5                   | 13368.46        | 46.29          | 42.25          | -4.04         | 74.00          | 31.75       | PK  | Vertical | PASS    |
| 6                   | 17689.90        | 45.71          | 45.94          | 0.23          | 74.00          | 28.06       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

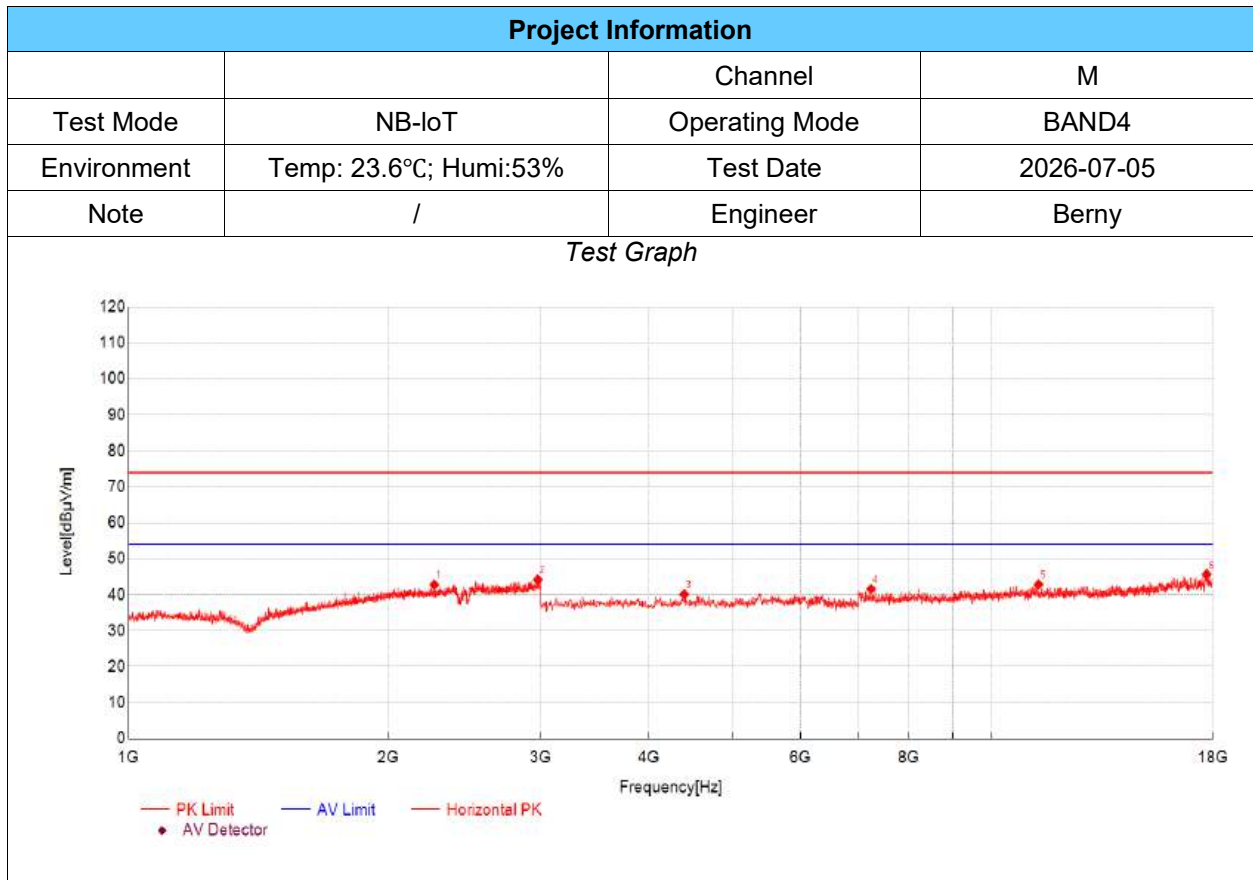

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2259.09         | 51.79          | 42.79          | -9.00         | 74.00          | 31.21       | PK  | Horizontal | PASS    |
| 2                   | 2976.66         | 51.26          | 44.21          | -7.05         | 74.00          | 29.79       | PK  | Horizontal | PASS    |
| 3                   | 4400.47         | 52.00          | 40.10          | -11.90        | 74.00          | 33.90       | PK  | Horizontal | PASS    |
| 4                   | 7236.41         | 49.73          | 41.59          | -8.14         | 74.00          | 32.41       | PK  | Horizontal | PASS    |
| 5                   | 11307.77        | 47.34          | 42.85          | -4.49         | 74.00          | 31.15       | PK  | Horizontal | PASS    |
| 6                   | 17704.90        | 45.55          | 45.62          | 0.07          | 74.00          | 28.38       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

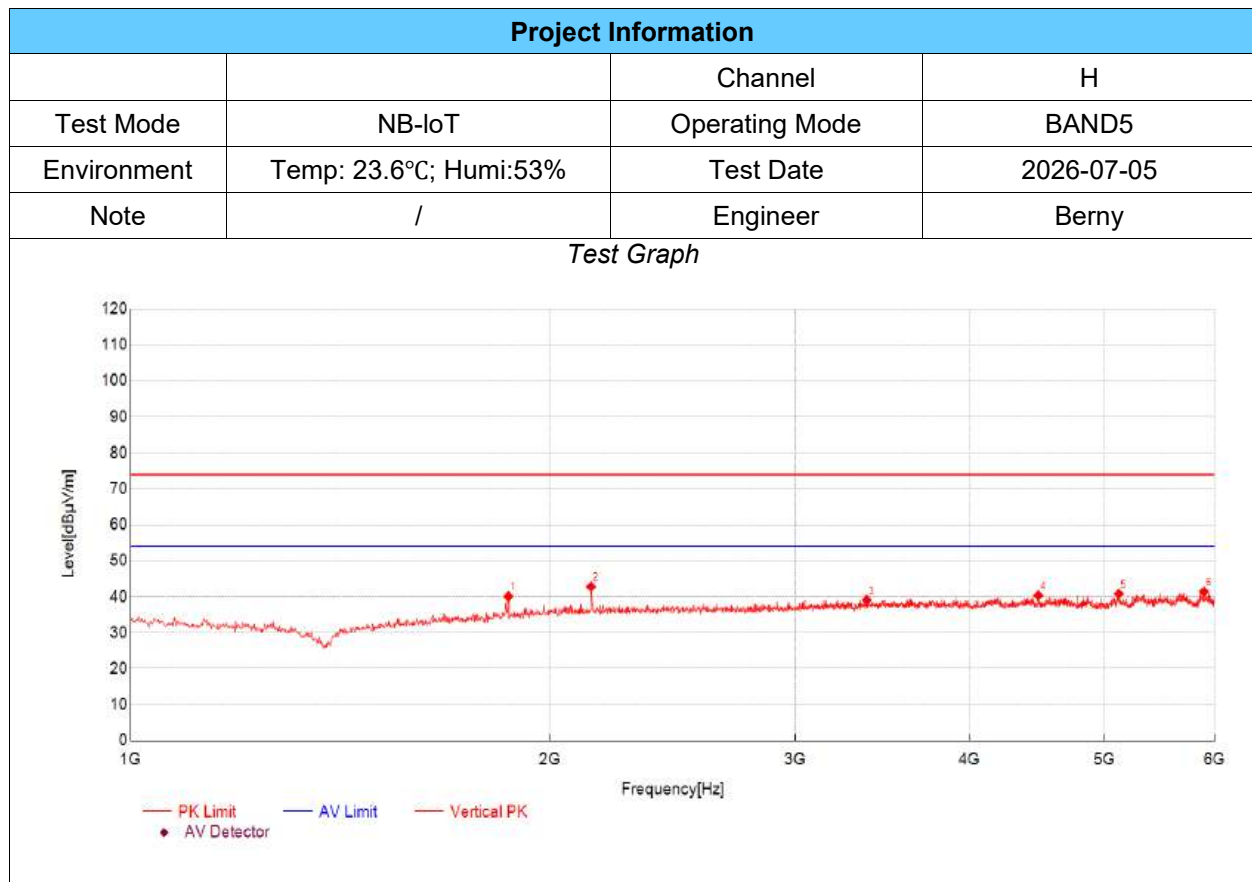

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1866.96         | 59.61          | 40.07          | -19.54        | 74.00          | 33.93       | PK  | Vertical | PASS    |
| 2                   | 2140.38         | 60.81          | 42.80          | -18.01        | 74.00          | 31.20       | PK  | Vertical | PASS    |
| 3                   | 3375.79         | 53.68          | 39.08          | -14.60        | 74.00          | 34.92       | PK  | Vertical | PASS    |
| 4                   | 4482.83         | 52.38          | 40.35          | -12.03        | 74.00          | 33.65       | PK  | Vertical | PASS    |
| 5                   | 5119.71         | 51.00          | 40.77          | -10.23        | 74.00          | 33.23       | PK  | Vertical | PASS    |
| 6                   | 5894.96         | 49.91          | 41.43          | -8.48         | 74.00          | 32.57       | PK  | Vertical | PASS    |

Note: (1) Level = Reading + Factor


(2) Margin = Limit - Level

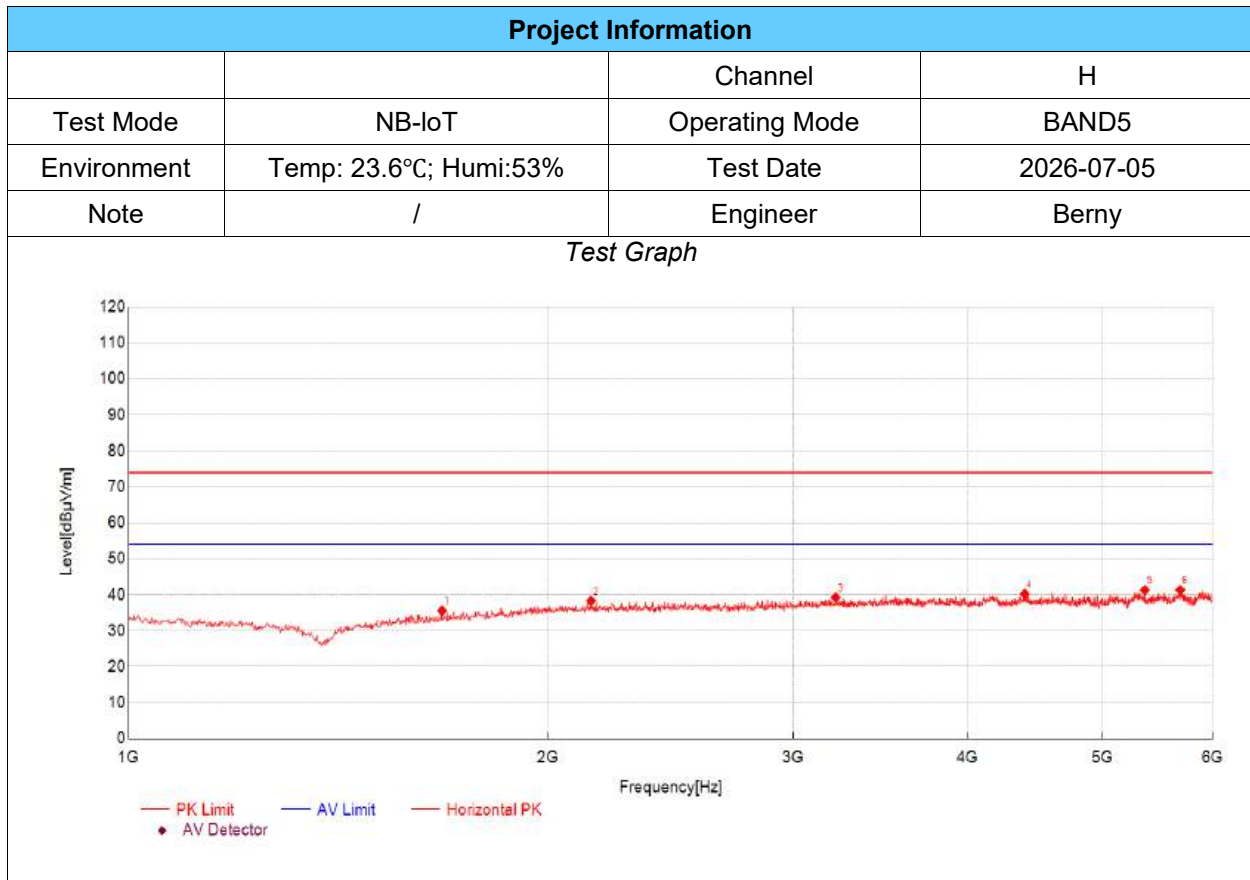

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 1678.56         | 56.56          | 35.53          | -21.03        | 74.00          | 38.47       | PK  | Horizontal | PASS    |
| 2                   | 2147.05         | 56.32          | 38.33          | -17.99        | 74.00          | 35.67       | PK  | Horizontal | PASS    |
| 3                   | 3217.41         | 54.20          | 39.25          | -14.95        | 74.00          | 34.75       | PK  | Horizontal | PASS    |
| 4                   | 4397.80         | 52.29          | 40.23          | -12.06        | 74.00          | 33.77       | PK  | Horizontal | PASS    |
| 5                   | 5363.12         | 51.08          | 41.28          | -9.80         | 74.00          | 32.72       | PK  | Horizontal | PASS    |
| 6                   | 5684.89         | 49.73          | 41.31          | -8.42         | 74.00          | 32.69       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

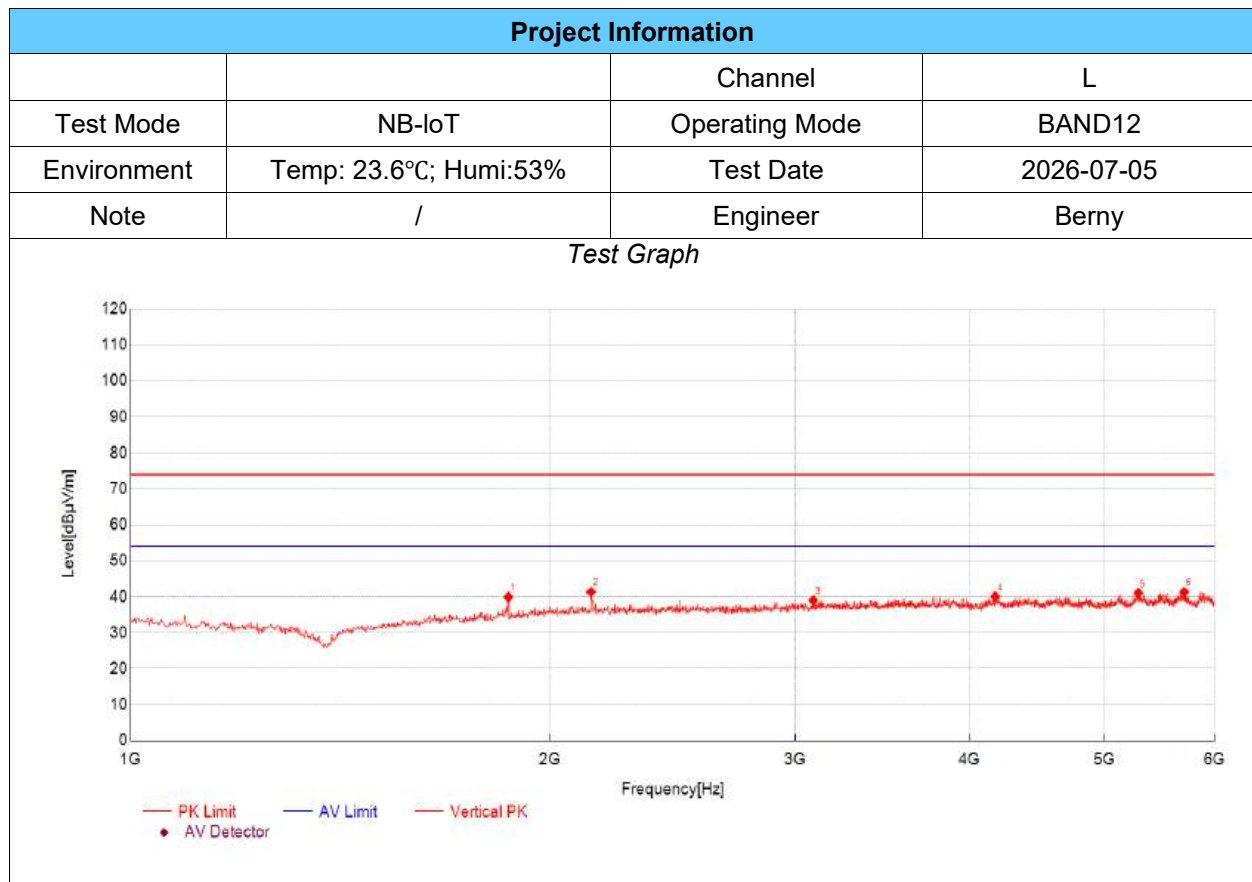

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1866.96         | 59.43          | 39.89          | -19.54        | 74.00          | 34.11       | PK  | Vertical | PASS    |
| 2                   | 2140.38         | 59.32          | 41.31          | -18.01        | 74.00          | 32.69       | PK  | Vertical | PASS    |
| 3                   | 3090.70         | 54.51          | 38.99          | -15.52        | 74.00          | 35.01       | PK  | Vertical | PASS    |
| 4                   | 4174.39         | 52.32          | 40.03          | -12.29        | 74.00          | 33.97       | PK  | Vertical | PASS    |
| 5                   | 5288.10         | 50.40          | 40.99          | -9.41         | 74.00          | 33.01       | PK  | Vertical | PASS    |
| 6                   | 5703.23         | 49.79          | 41.30          | -8.49         | 74.00          | 32.70       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

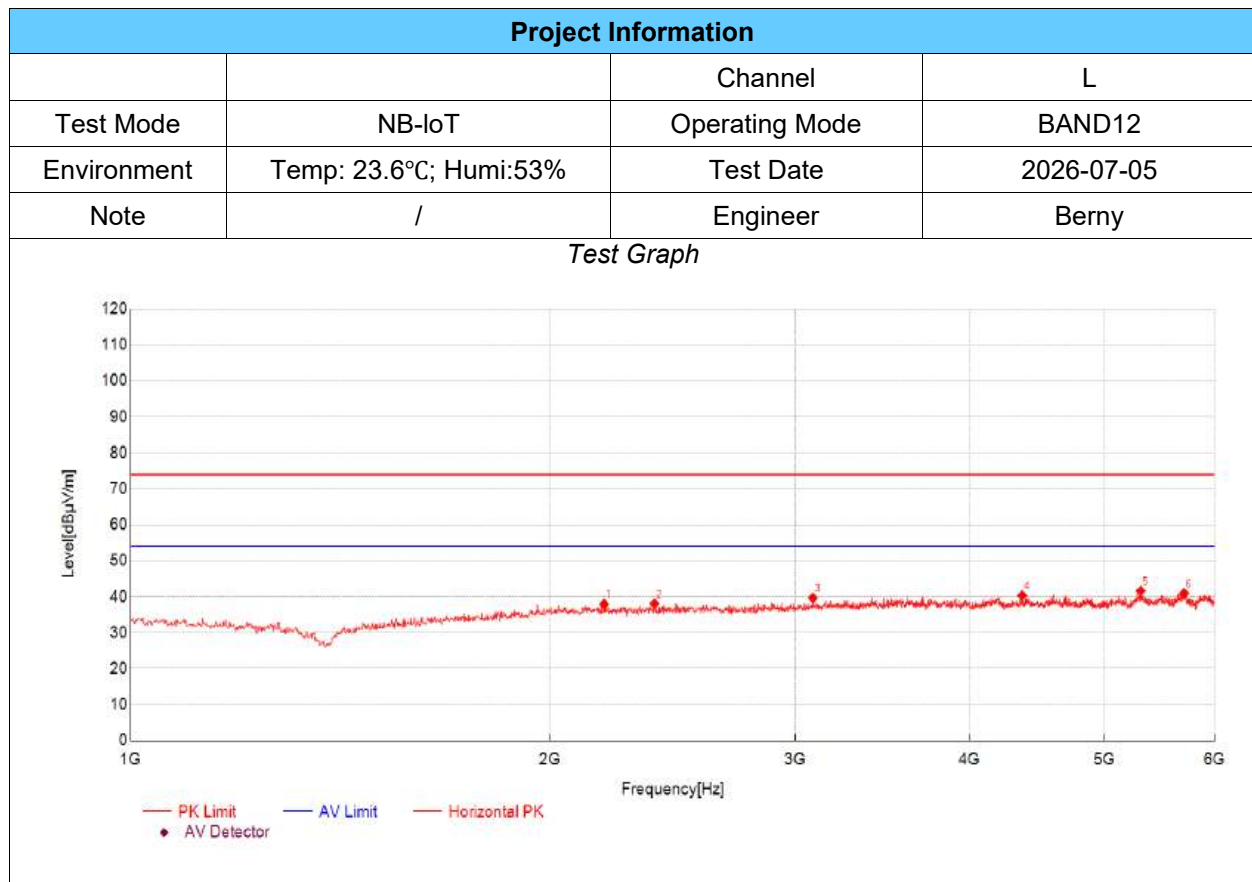

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2187.06         | 55.94          | 37.96          | -17.98        | 74.00          | 36.04       | PK  | Horizontal | PASS    |
| 2                   | 2377.13         | 55.54          | 38.10          | -17.44        | 74.00          | 35.90       | PK  | Horizontal | PASS    |
| 3                   | 3089.03         | 55.17          | 39.64          | -15.53        | 74.00          | 34.36       | PK  | Horizontal | PASS    |
| 4                   | 4364.45         | 52.61          | 40.33          | -12.28        | 74.00          | 33.67       | PK  | Horizontal | PASS    |
| 5                   | 5309.77         | 51.02          | 41.62          | -9.40         | 74.00          | 32.38       | PK  | Horizontal | PASS    |
| 6                   | 5703.23         | 49.44          | 40.95          | -8.49         | 74.00          | 33.05       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

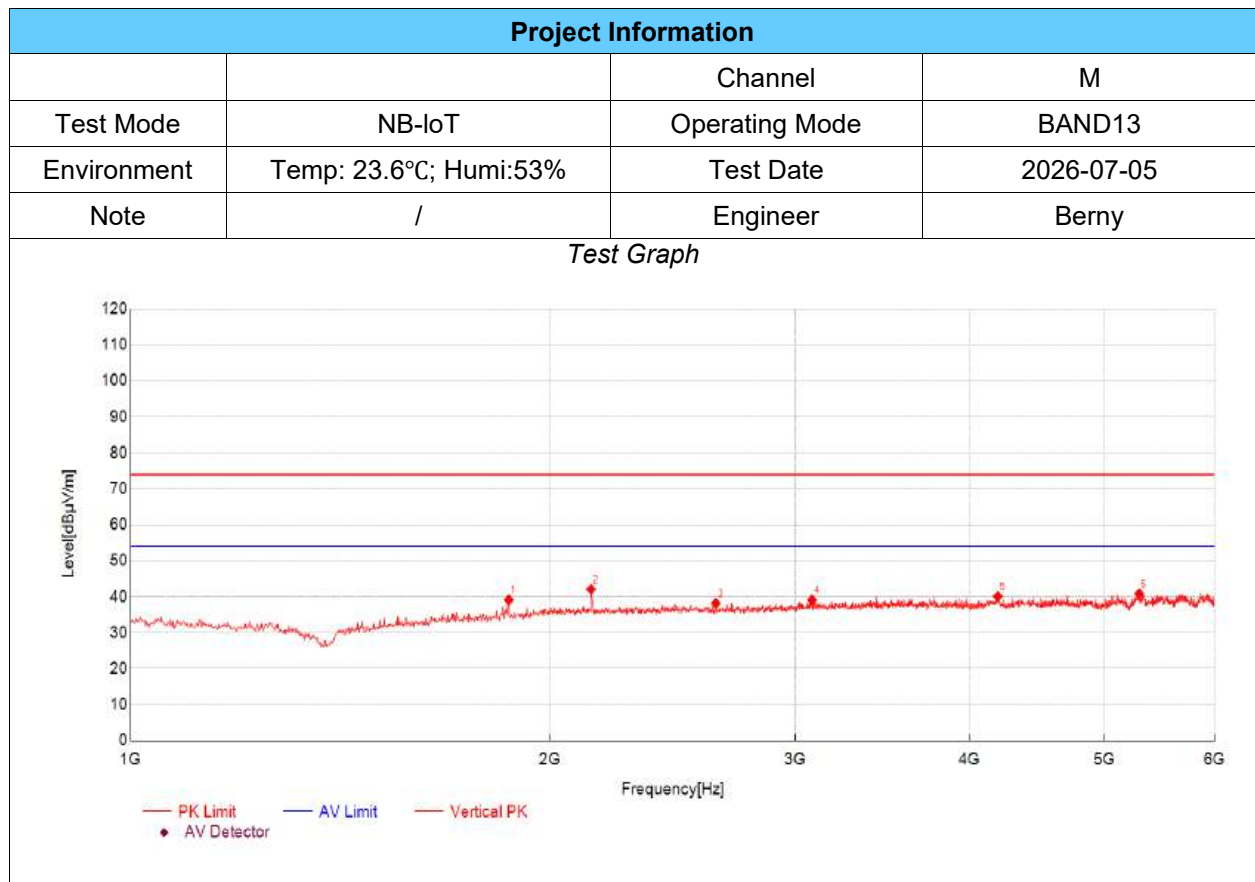

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1868.62         | 58.66          | 39.13          | -19.53        | 74.00          | 34.87       | PK  | Vertical | PASS    |
| 2                   | 2140.38         | 60.07          | 42.06          | -18.01        | 74.00          | 31.94       | PK  | Vertical | PASS    |
| 3                   | 2630.54         | 55.05          | 38.19          | -16.86        | 74.00          | 35.81       | PK  | Vertical | PASS    |
| 4                   | 3084.03         | 54.64          | 39.09          | -15.55        | 74.00          | 34.91       | PK  | Vertical | PASS    |
| 5                   | 4192.73         | 52.32          | 40.10          | -12.22        | 74.00          | 33.90       | PK  | Vertical | PASS    |
| 6                   | 5296.43         | 50.19          | 40.81          | -9.38         | 74.00          | 33.19       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

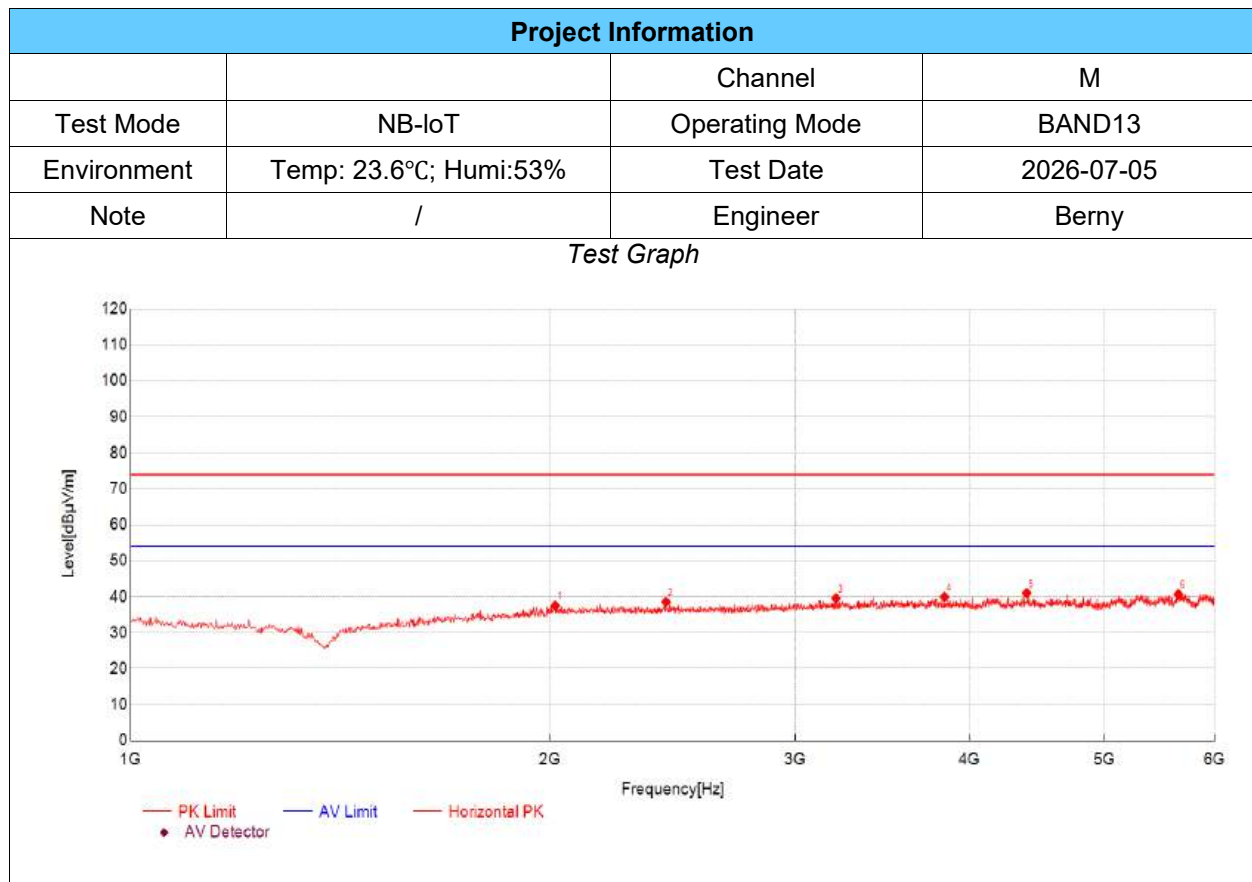

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2017.01         | 55.87          | 37.50          | -18.37        | 74.00          | 36.50       | PK  | Horizontal | PASS    |
| 2                   | 2422.14         | 55.84          | 38.57          | -17.27        | 74.00          | 35.43       | PK  | Horizontal | PASS    |
| 3                   | 3209.07         | 54.56          | 39.54          | -15.02        | 74.00          | 34.46       | PK  | Horizontal | PASS    |
| 4                   | 3837.61         | 53.57          | 39.93          | -13.64        | 74.00          | 34.07       | PK  | Horizontal | PASS    |
| 5                   | 4397.80         | 53.08          | 41.02          | -12.06        | 74.00          | 32.98       | PK  | Horizontal | PASS    |
| 6                   | 5649.88         | 49.54          | 40.67          | -8.87         | 74.00          | 33.33       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

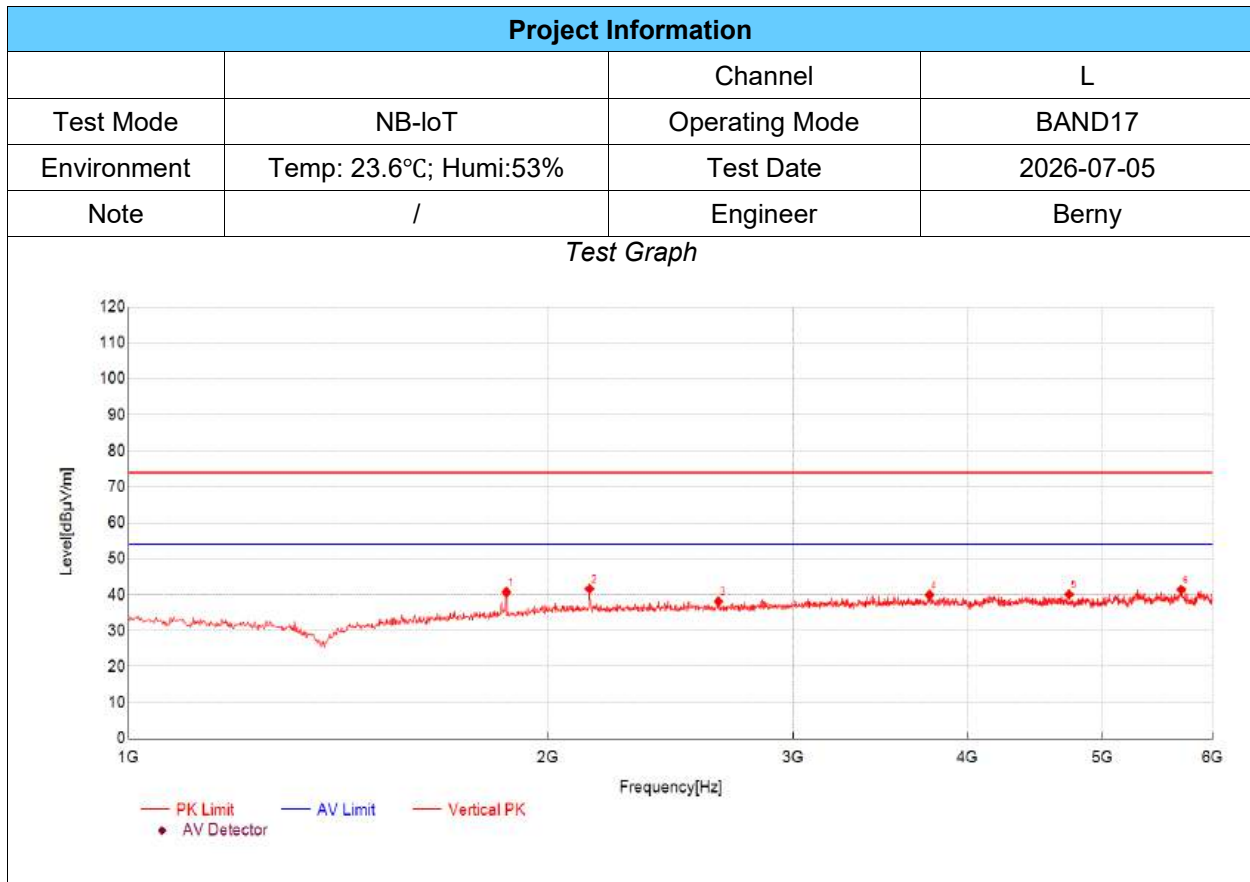

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1866.96         | 60.23          | 40.69          | -19.54        | 74.00          | 33.31       | PK  | Vertical | PASS    |
| 2                   | 2142.05         | 59.65          | 41.64          | -18.01        | 74.00          | 32.36       | PK  | Vertical | PASS    |
| 3                   | 2650.55         | 54.87          | 38.15          | -16.72        | 74.00          | 35.85       | PK  | Vertical | PASS    |
| 4                   | 3757.59         | 53.57          | 39.92          | -13.65        | 74.00          | 34.08       | PK  | Vertical | PASS    |
| 5                   | 4731.24         | 51.70          | 40.08          | -11.62        | 74.00          | 33.92       | PK  | Vertical | PASS    |
| 6                   | 5694.90         | 49.85          | 41.39          | -8.46         | 74.00          | 32.61       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

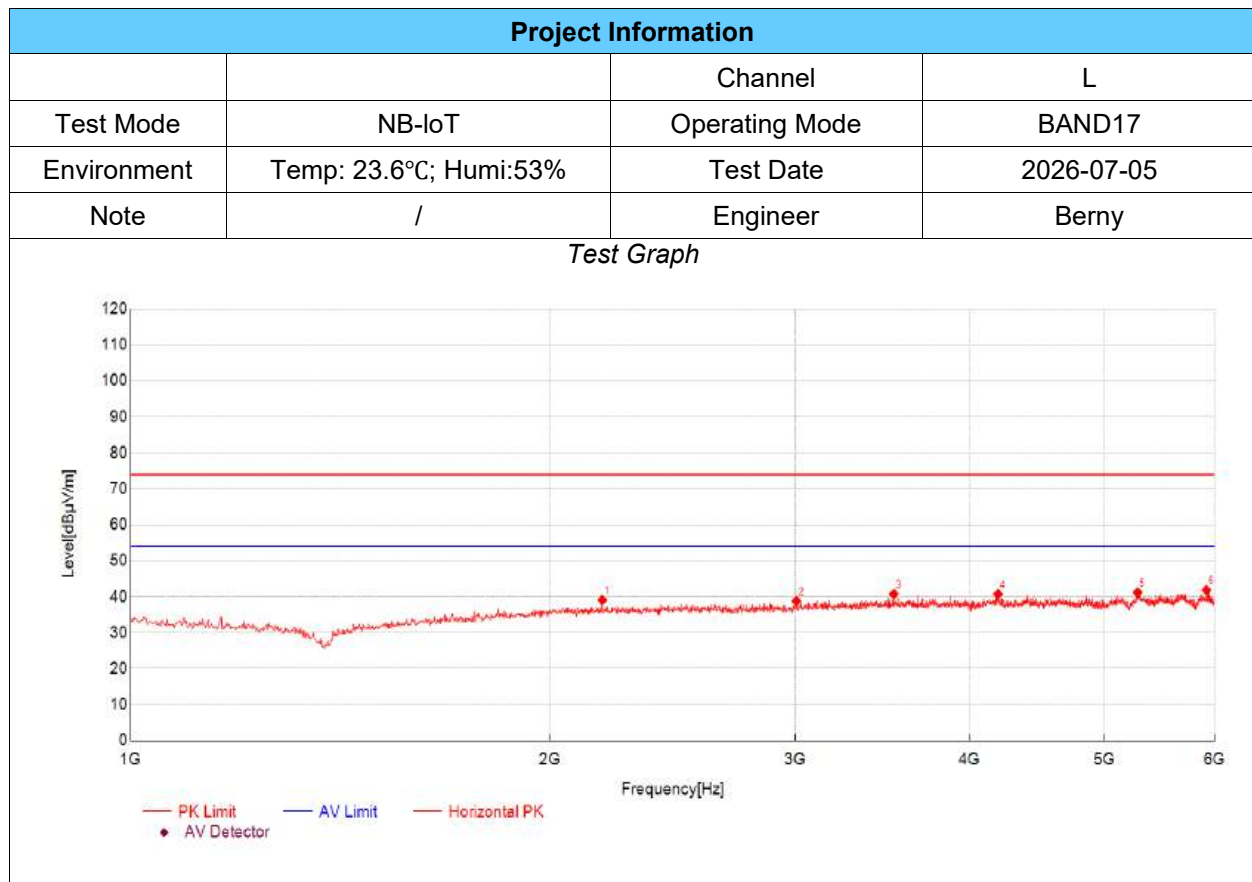

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2180.39         | 57.07          | 39.08          | -17.99        | 74.00          | 34.92       | PK  | Horizontal | PASS    |
| 2                   | 3005.67         | 54.58          | 38.79          | -15.79        | 74.00          | 35.21       | PK  | Horizontal | PASS    |
| 3                   | 3530.84         | 54.76          | 40.74          | -14.02        | 74.00          | 33.26       | PK  | Horizontal | PASS    |
| 4                   | 4194.40         | 52.96          | 40.73          | -12.23        | 74.00          | 33.27       | PK  | Horizontal | PASS    |
| 5                   | 5281.43         | 50.60          | 41.16          | -9.44         | 74.00          | 32.84       | PK  | Horizontal | PASS    |
| 6                   | 5916.64         | 50.38          | 41.86          | -8.52         | 74.00          | 32.14       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

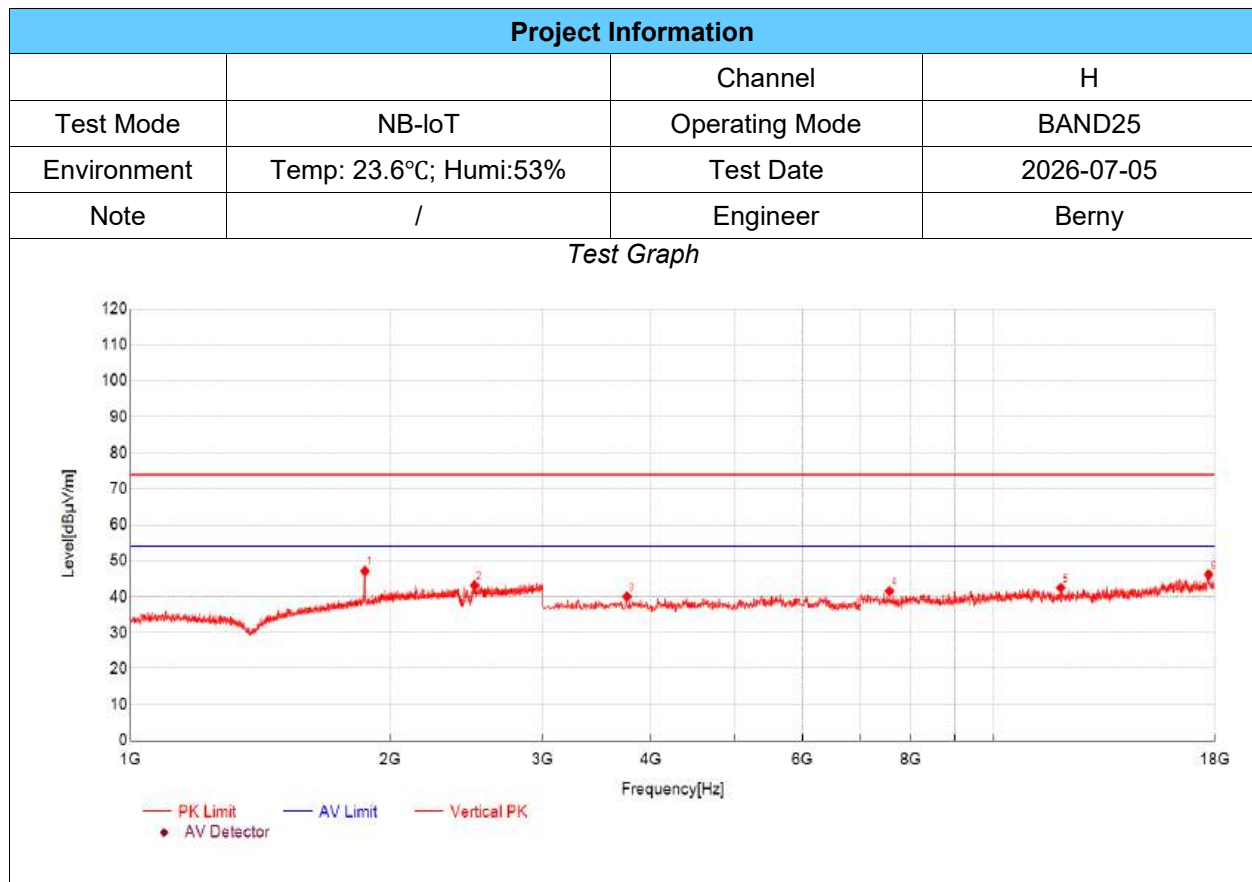

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1867.62         | 57.51          | 47.13          | -10.38        | 74.00          | 26.87       | PK  | Vertical | PASS    |
| 2                   | 2501.83         | 51.60          | 43.19          | -8.41         | 74.00          | 30.81       | PK  | Vertical | PASS    |
| 3                   | 3755.25         | 53.48          | 40.01          | -13.47        | 74.00          | 33.99       | PK  | Vertical | PASS    |
| 4                   | 7561.52         | 49.47          | 41.56          | -7.91         | 74.00          | 32.44       | PK  | Vertical | PASS    |
| 5                   | 11942.98        | 46.94          | 42.44          | -4.50         | 74.00          | 31.56       | PK  | Vertical | PASS    |
| 6                   | 17704.90        | 46.05          | 46.12          | 0.07          | 74.00          | 27.88       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

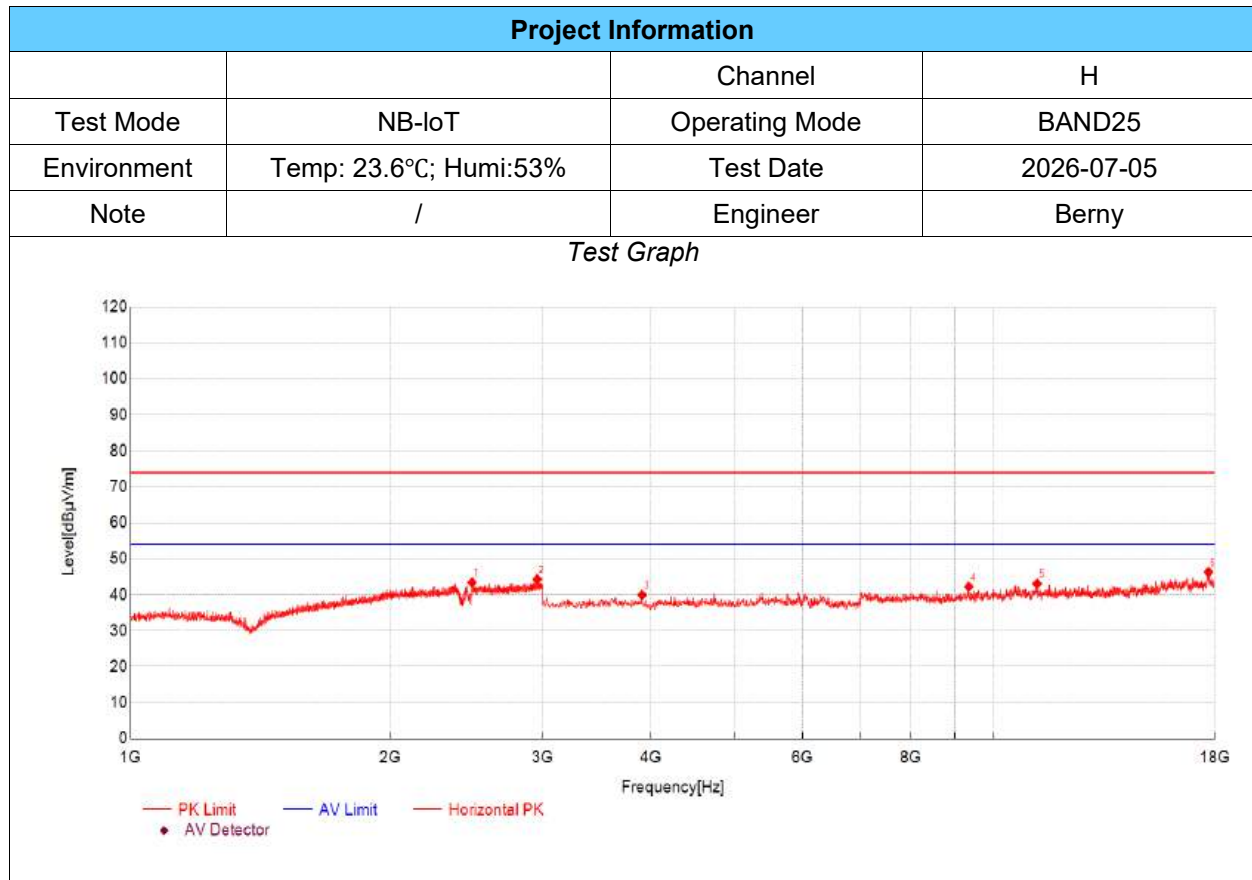

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2485.83         | 51.86          | 43.43          | -8.43         | 74.00          | 30.57       | PK  | Horizontal | PASS    |
| 2                   | 2956.65         | 51.72          | 44.33          | -7.39         | 74.00          | 29.67       | PK  | Horizontal | PASS    |
| 3                   | 3910.30         | 53.07          | 39.92          | -13.15        | 74.00          | 34.08       | PK  | Horizontal | PASS    |
| 4                   | 9342.11         | 49.42          | 42.23          | -7.19         | 74.00          | 31.77       | PK  | Horizontal | PASS    |
| 5                   | 11212.74        | 47.28          | 43.10          | -4.18         | 74.00          | 30.90       | PK  | Horizontal | PASS    |
| 6                   | 17694.90        | 46.06          | 46.27          | 0.21          | 74.00          | 27.73       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

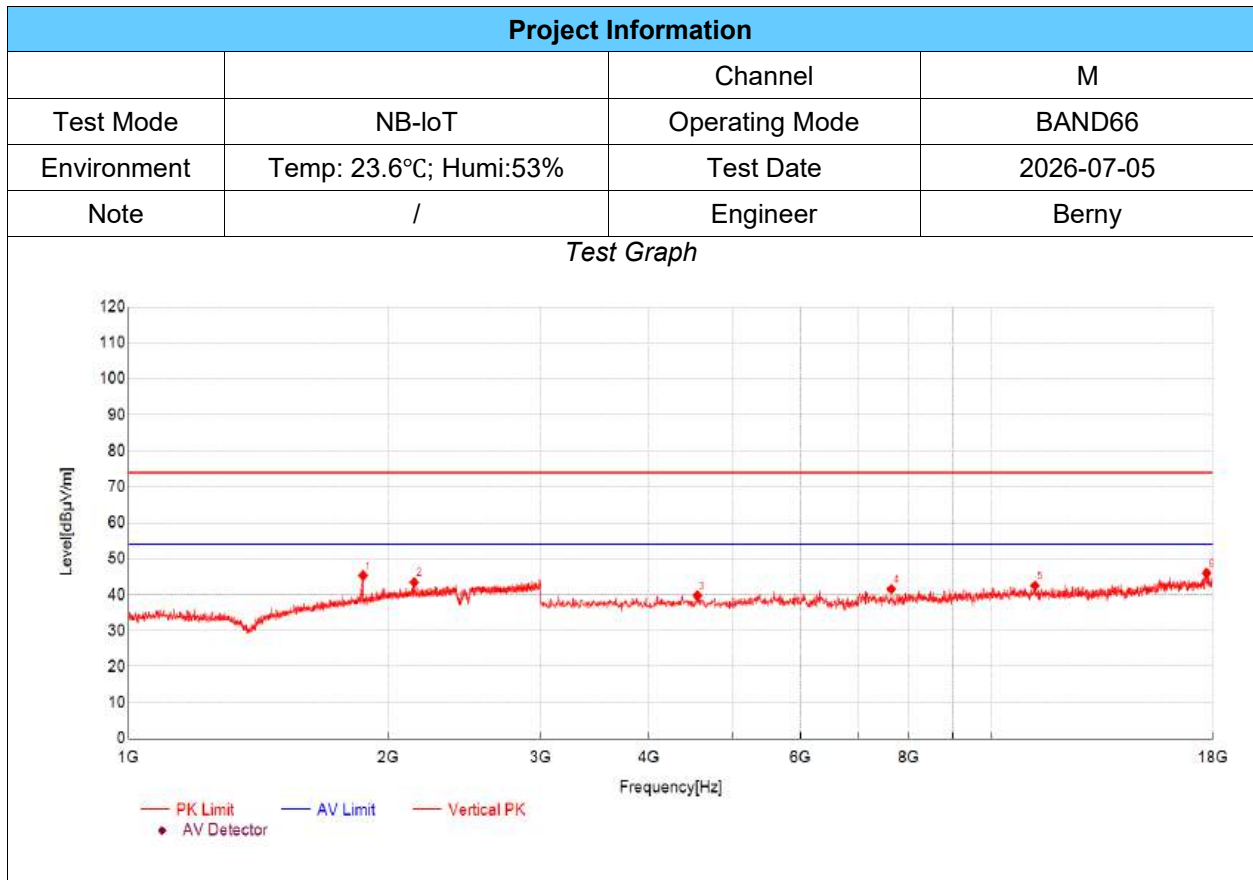

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1868.29         | 55.71          | 45.33          | -10.38        | 74.00          | 28.67       | PK  | Vertical | PASS    |
| 2                   | 2141.71         | 52.51          | 43.46          | -9.05         | 74.00          | 30.54       | PK  | Vertical | PASS    |
| 3                   | 4555.52         | 51.58          | 39.72          | -11.86        | 74.00          | 34.28       | PK  | Vertical | PASS    |
| 4                   | 7641.55         | 49.40          | 41.56          | -7.84         | 74.00          | 32.44       | PK  | Vertical | PASS    |
| 5                   | 11207.74        | 46.78          | 42.50          | -4.28         | 74.00          | 31.50       | PK  | Vertical | PASS    |
| 6                   | 17704.90        | 45.91          | 45.98          | 0.07          | 74.00          | 28.02       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

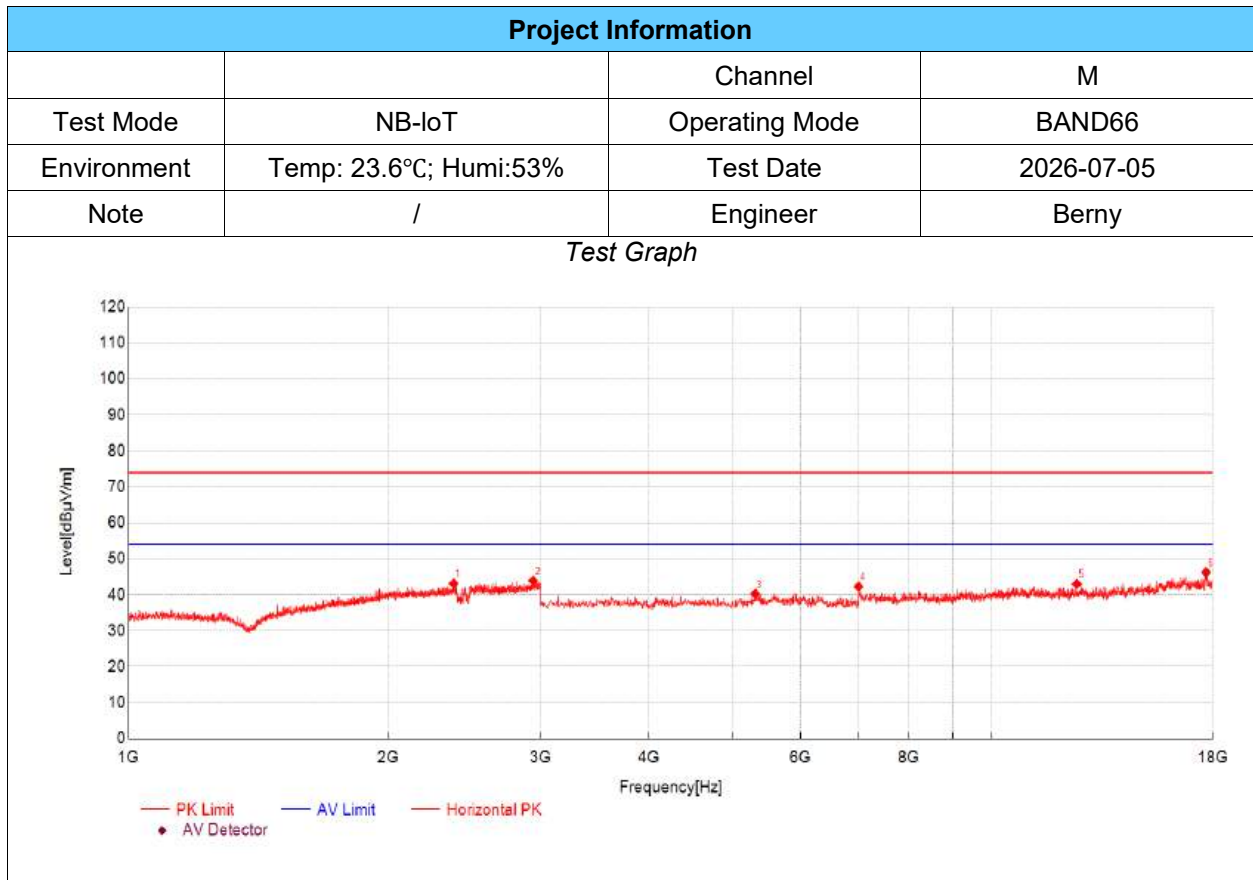

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2379.13         | 51.64          | 43.11          | -8.53         | 74.00          | 30.89       | PK  | Horizontal | PASS    |
| 2                   | 2940.65         | 51.37          | 43.89          | -7.48         | 74.00          | 30.11       | PK  | Horizontal | PASS    |
| 3                   | 5315.77         | 50.28          | 40.24          | -10.04        | 74.00          | 33.76       | PK  | Horizontal | PASS    |
| 4                   | 7001.33         | 50.06          | 42.25          | -7.81         | 74.00          | 31.75       | PK  | Horizontal | PASS    |
| 5                   | 12528.18        | 47.24          | 42.99          | -4.25         | 74.00          | 31.01       | PK  | Horizontal | PASS    |
| 6                   | 17674.89        | 45.88          | 46.20          | 0.32          | 74.00          | 27.80       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

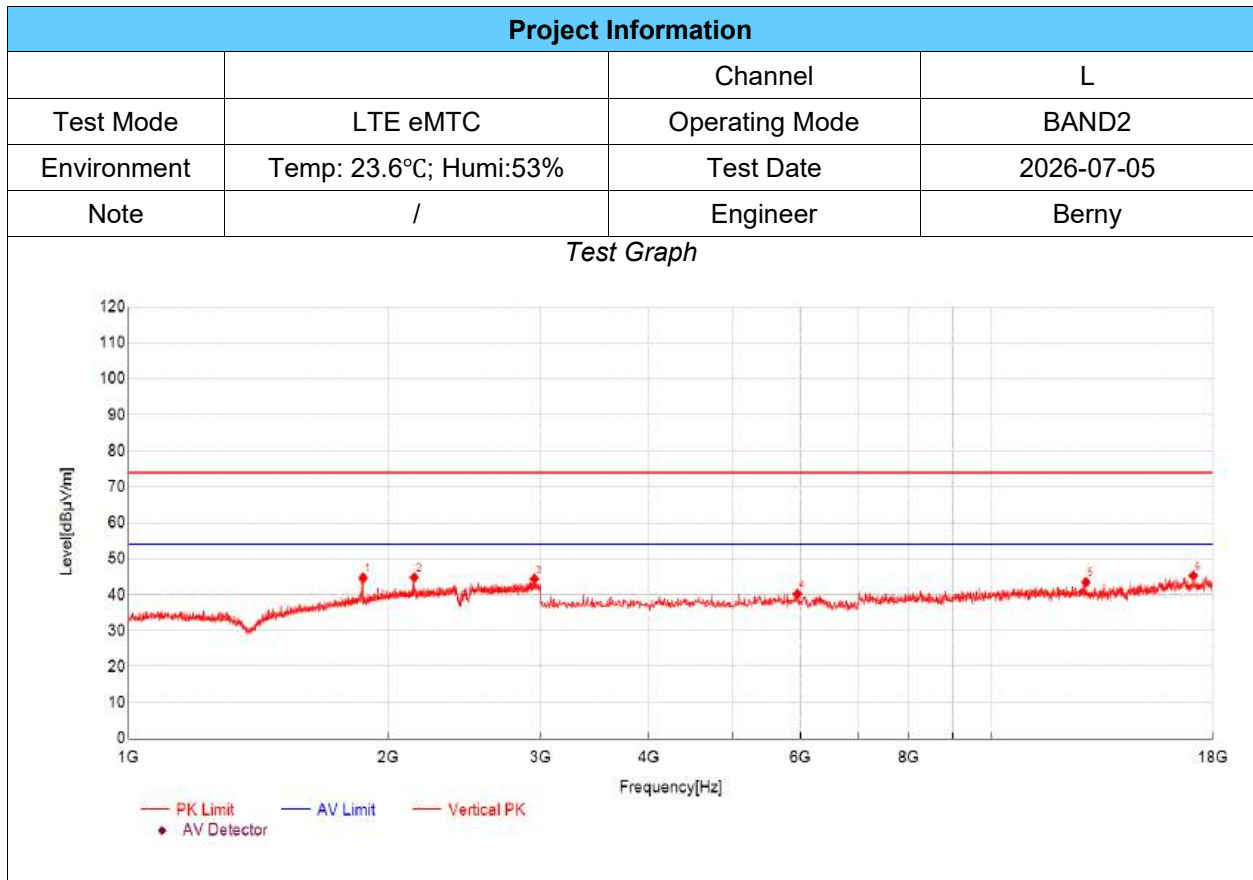

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1868.29         | 55.06          | 44.68          | -10.38        | 74.00          | 29.32       | PK  | Vertical | PASS    |
| 2                   | 2141.71         | 53.84          | 44.79          | -9.05         | 74.00          | 29.21       | PK  | Vertical | PASS    |
| 3                   | 2950.65         | 51.84          | 44.41          | -7.43         | 74.00          | 29.59       | PK  | Vertical | PASS    |
| 4                   | 5945.98         | 48.93          | 40.21          | -8.72         | 74.00          | 33.79       | PK  | Vertical | PASS    |
| 5                   | 12828.28        | 47.96          | 43.48          | -4.48         | 74.00          | 30.52       | PK  | Vertical | PASS    |
| 6                   | 17089.70        | 46.02          | 45.26          | -0.76         | 74.00          | 28.74       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

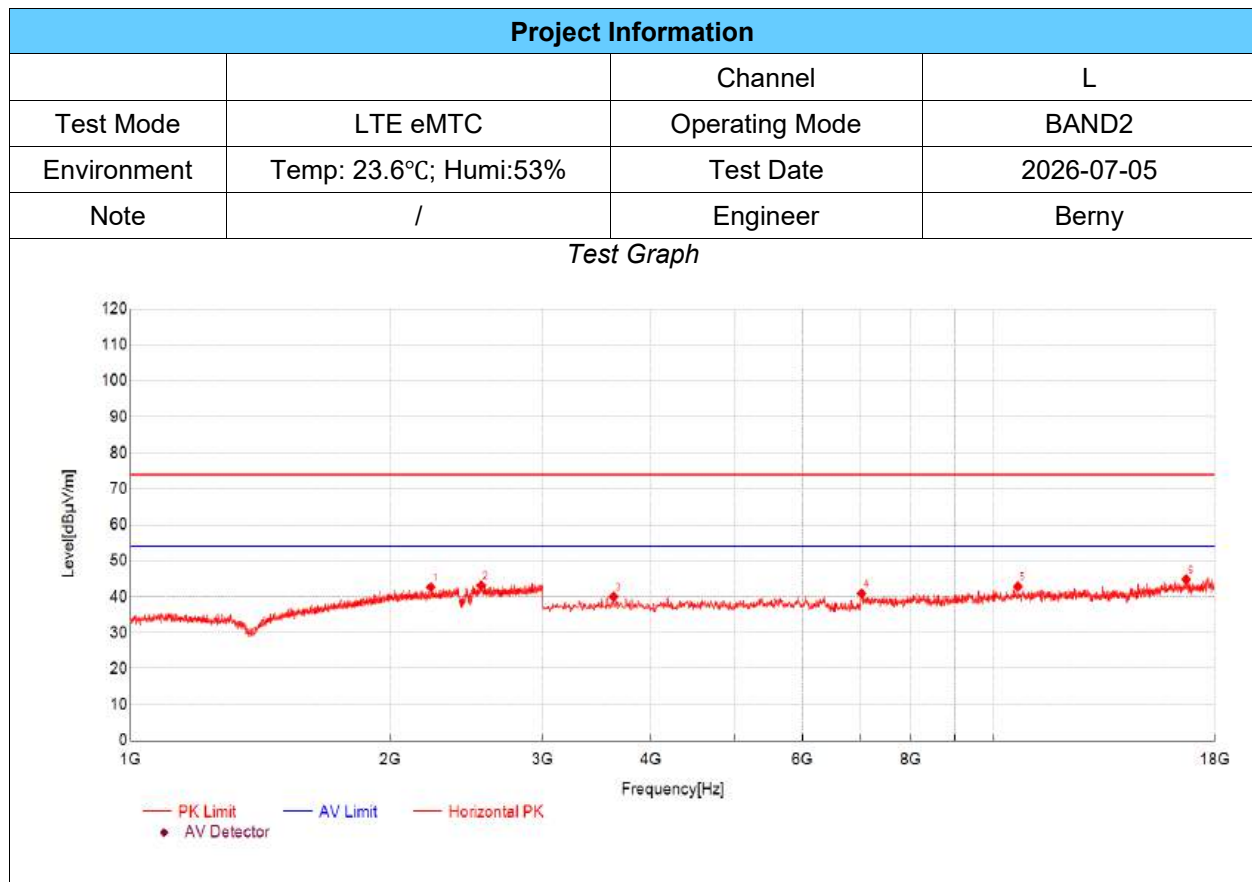

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2226.41         | 51.84          | 42.66          | -9.18         | 74.00          | 31.34       | PK  | Horizontal | PASS    |
| 2                   | 2546.52         | 51.42          | 43.17          | -8.25         | 74.00          | 30.83       | PK  | Horizontal | PASS    |
| 3                   | 3625.21         | 53.42          | 40.00          | -13.42        | 74.00          | 34.00       | PK  | Horizontal | PASS    |
| 4                   | 7021.34         | 48.66          | 40.85          | -7.81         | 74.00          | 33.15       | PK  | Horizontal | PASS    |
| 5                   | 10647.55        | 48.20          | 42.83          | -5.37         | 74.00          | 31.17       | PK  | Horizontal | PASS    |
| 6                   | 16679.56        | 45.29          | 44.80          | -0.49         | 74.00          | 29.20       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

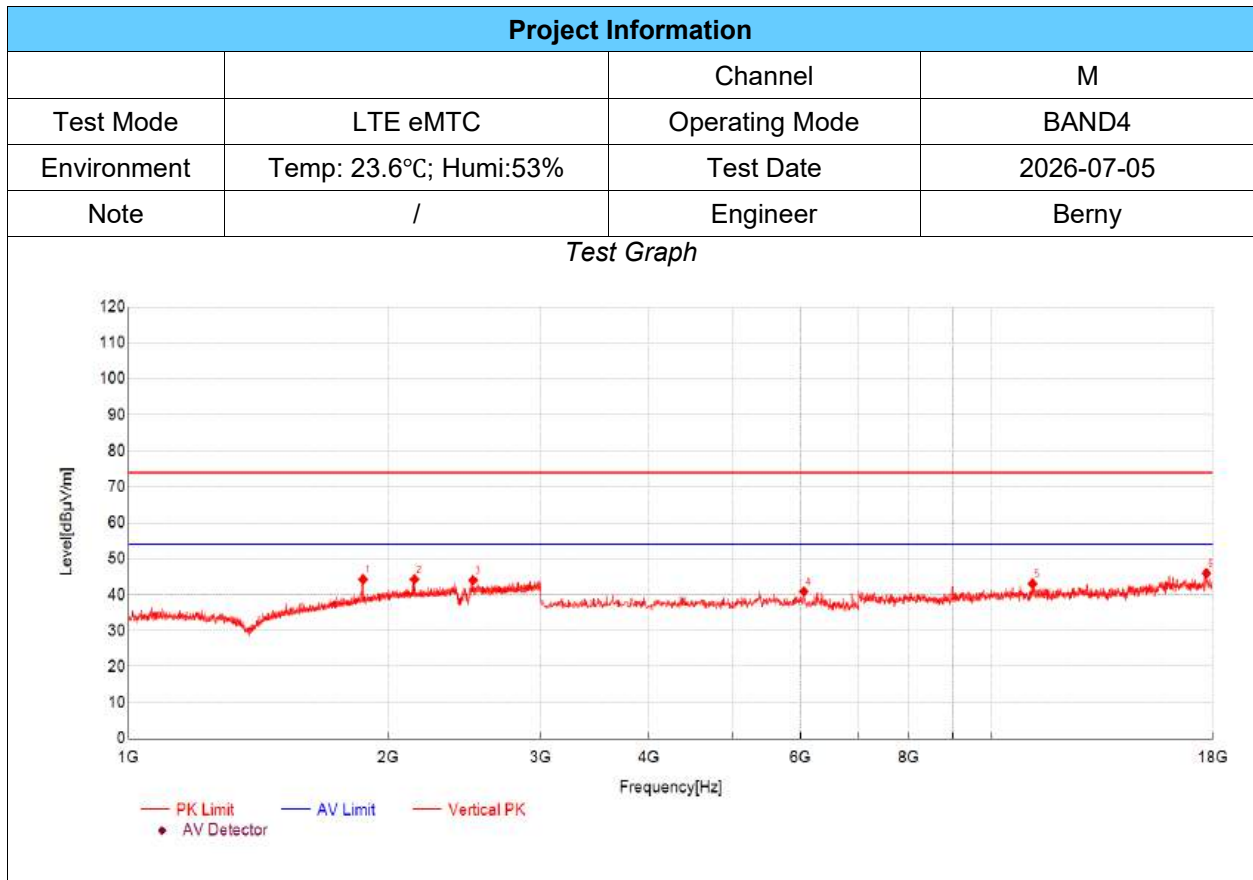

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1868.29         | 54.64          | 44.26          | -10.38        | 74.00          | 29.74       | PK  | Vertical | PASS    |
| 2                   | 2143.05         | 53.34          | 44.29          | -9.05         | 74.00          | 29.71       | PK  | Vertical | PASS    |
| 3                   | 2505.17         | 52.45          | 44.05          | -8.40         | 74.00          | 29.95       | PK  | Vertical | PASS    |
| 4                   | 6051.02         | 48.93          | 40.87          | -8.06         | 74.00          | 33.13       | PK  | Vertical | PASS    |
| 5                   | 11132.71        | 47.34          | 43.06          | -4.28         | 74.00          | 30.94       | PK  | Vertical | PASS    |
| 6                   | 17694.90        | 45.73          | 45.94          | 0.21          | 74.00          | 28.06       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

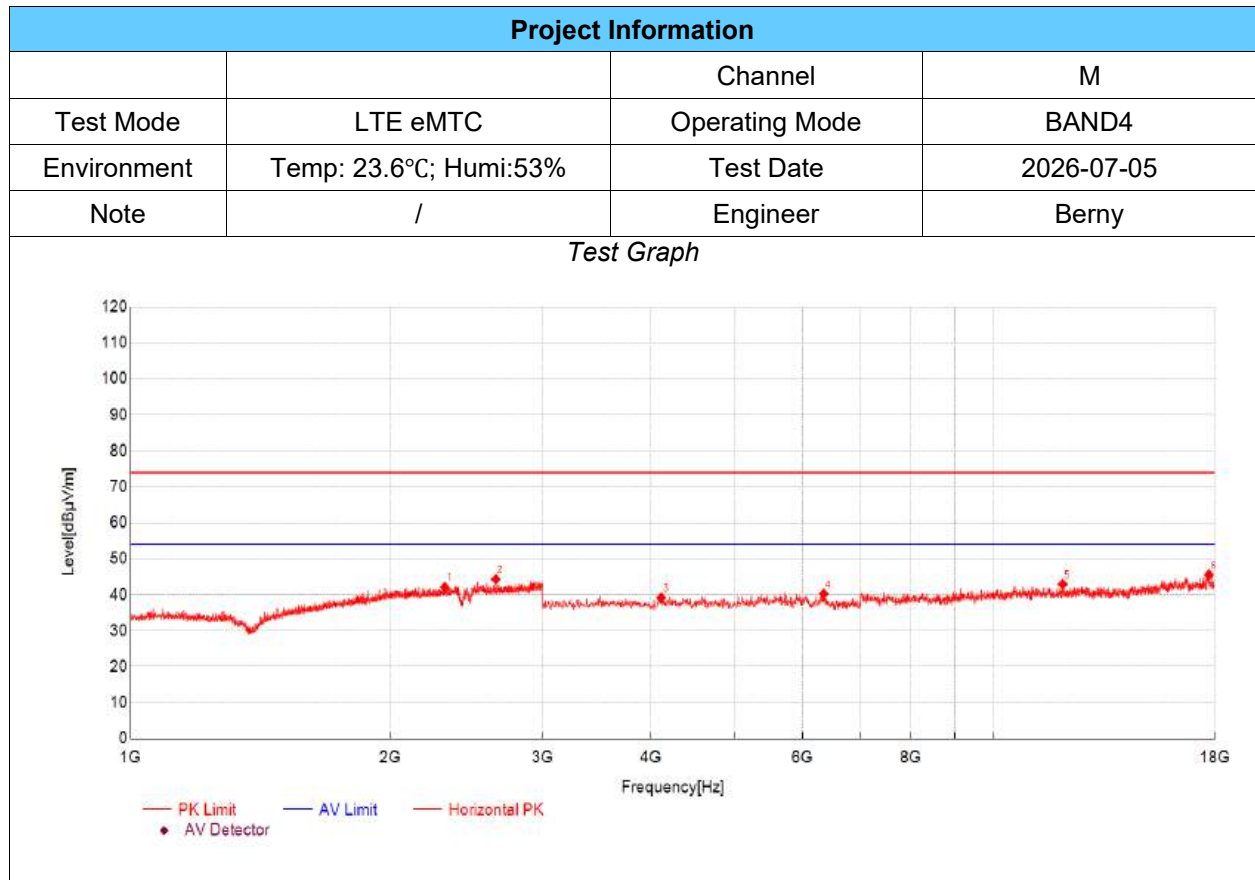

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2310.44         | 50.90          | 42.09          | -8.81         | 74.00          | 31.91       | PK  | Horizontal | PASS    |
| 2                   | 2647.88         | 53.03          | 44.31          | -8.72         | 74.00          | 29.69       | PK  | Horizontal | PASS    |
| 3                   | 4115.37         | 51.73          | 39.18          | -12.55        | 74.00          | 34.82       | PK  | Horizontal | PASS    |
| 4                   | 6346.12         | 48.23          | 40.26          | -7.97         | 74.00          | 33.74       | PK  | Horizontal | PASS    |
| 5                   | 11998.00        | 47.24          | 42.93          | -4.31         | 74.00          | 31.07       | PK  | Horizontal | PASS    |
| 6                   | 17719.91        | 45.77          | 45.52          | -0.25         | 74.00          | 28.48       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

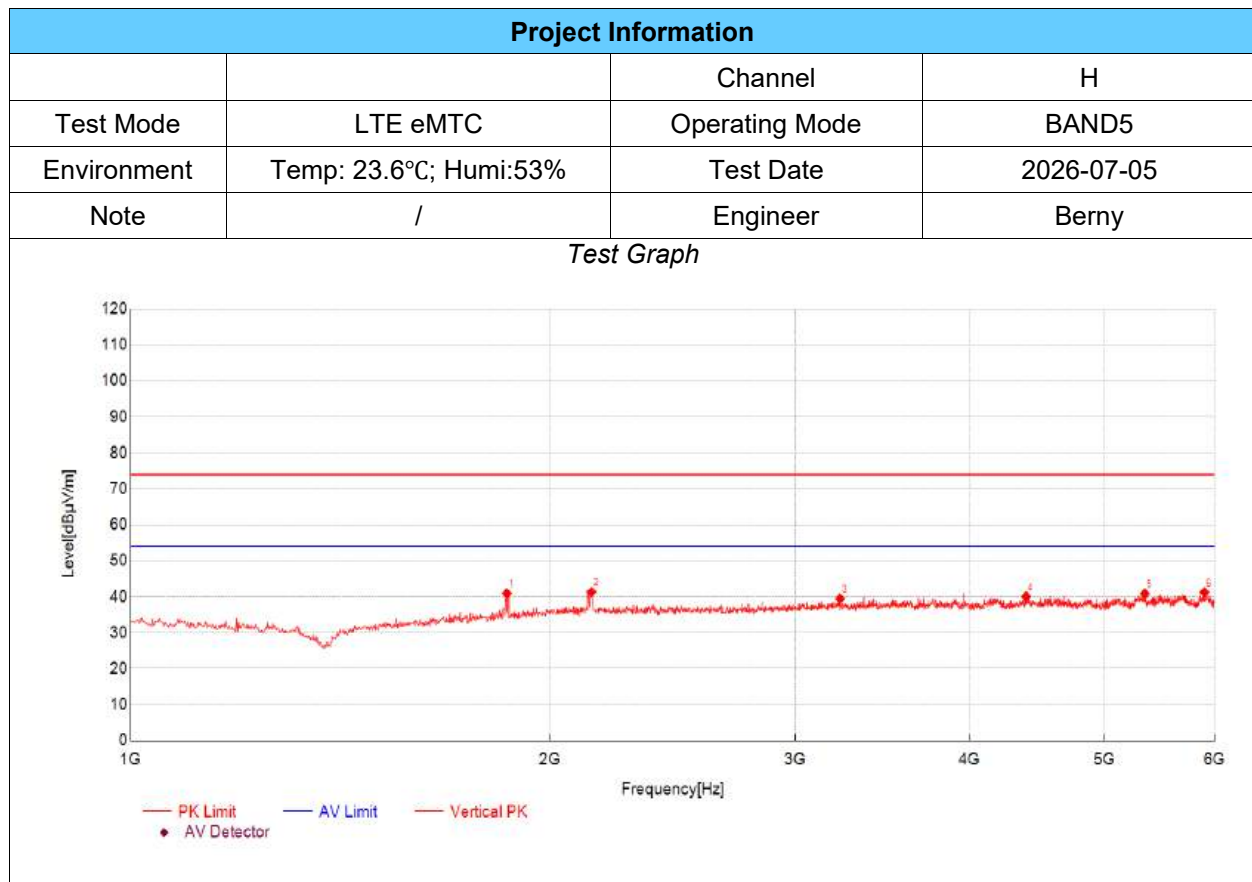

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1861.95         | 60.49          | 40.90          | -19.59        | 74.00          | 33.10       | PK  | Vertical | PASS    |
| 2                   | 2142.05         | 59.29          | 41.28          | -18.01        | 74.00          | 32.72       | PK  | Vertical | PASS    |
| 3                   | 3229.08         | 54.31          | 39.45          | -14.86        | 74.00          | 34.55       | PK  | Vertical | PASS    |
| 4                   | 4392.80         | 52.14          | 40.05          | -12.09        | 74.00          | 33.95       | PK  | Vertical | PASS    |
| 5                   | 5344.78         | 50.61          | 40.81          | -9.80         | 74.00          | 33.19       | PK  | Vertical | PASS    |
| 6                   | 5898.30         | 49.72          | 41.23          | -8.49         | 74.00          | 32.77       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

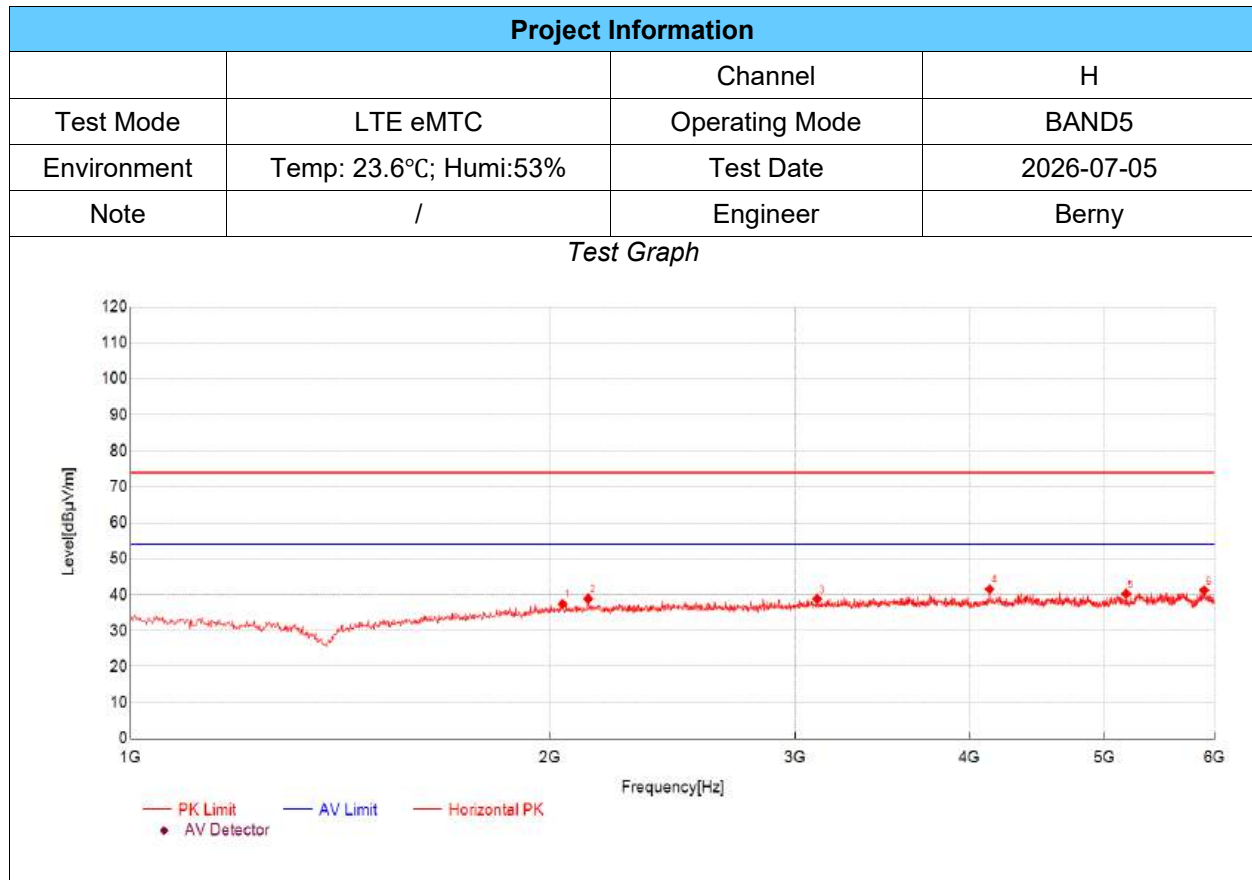

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2042.01         | 55.68          | 37.42          | -18.26        | 74.00          | 36.58       | PK  | Horizontal | PASS    |
| 2                   | 2130.38         | 56.89          | 38.86          | -18.03        | 74.00          | 35.14       | PK  | Horizontal | PASS    |
| 3                   | 3109.04         | 54.30          | 38.83          | -15.47        | 74.00          | 35.17       | PK  | Horizontal | PASS    |
| 4                   | 4136.05         | 54.16          | 41.53          | -12.63        | 74.00          | 32.47       | PK  | Horizontal | PASS    |
| 5                   | 5181.39         | 50.84          | 40.26          | -10.58        | 74.00          | 33.74       | PK  | Horizontal | PASS    |
| 6                   | 5896.63         | 49.70          | 41.21          | -8.49         | 74.00          | 32.79       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

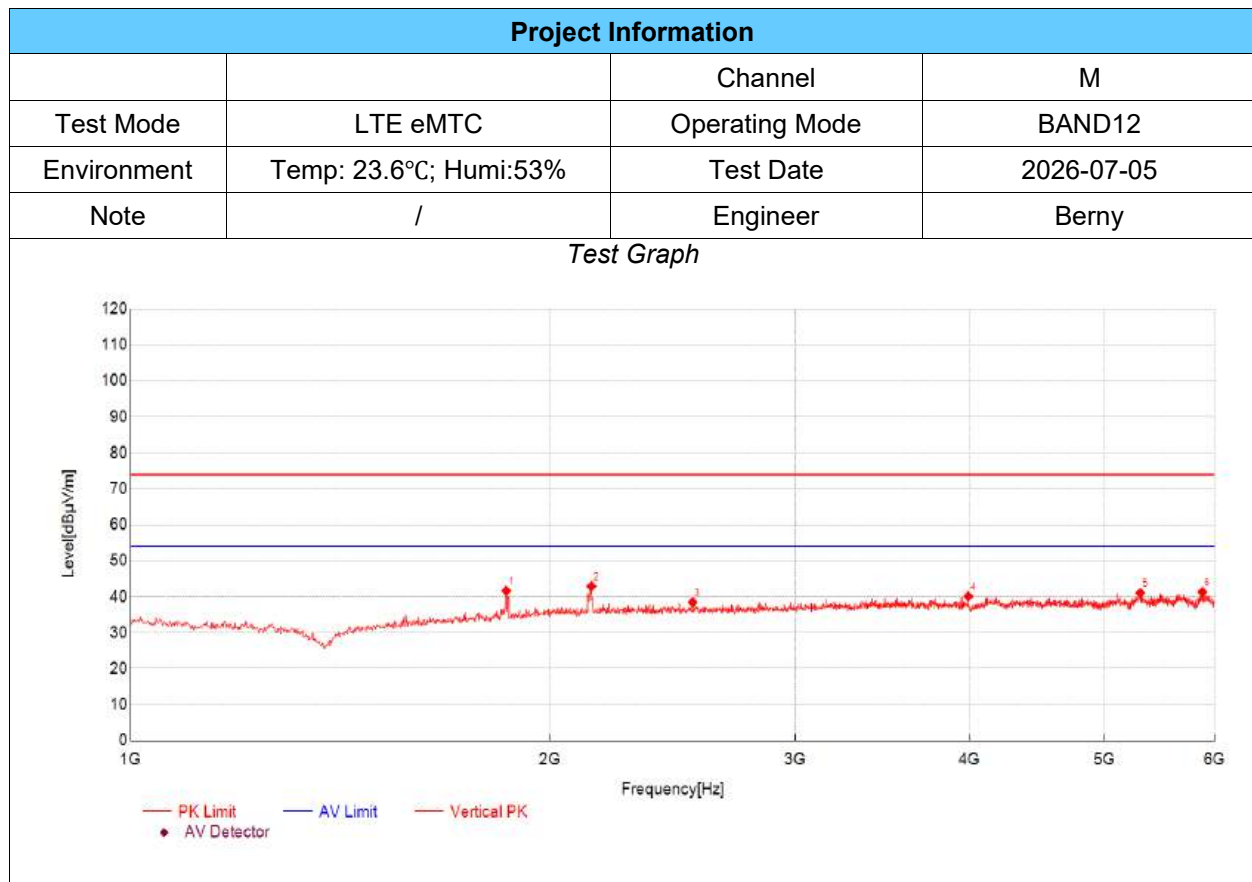

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1860.29         | 61.27          | 41.67          | -19.60        | 74.00          | 32.33       | PK  | Vertical | PASS    |
| 2                   | 2142.05         | 60.94          | 42.93          | -18.01        | 74.00          | 31.07       | PK  | Vertical | PASS    |
| 3                   | 2532.18         | 55.56          | 38.47          | -17.09        | 74.00          | 35.53       | PK  | Vertical | PASS    |
| 4                   | 3992.66         | 53.41          | 40.12          | -13.29        | 74.00          | 33.88       | PK  | Vertical | PASS    |
| 5                   | 5306.44         | 50.39          | 41.05          | -9.34         | 74.00          | 32.95       | PK  | Vertical | PASS    |
| 6                   | 5879.96         | 49.69          | 41.29          | -8.40         | 74.00          | 32.71       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

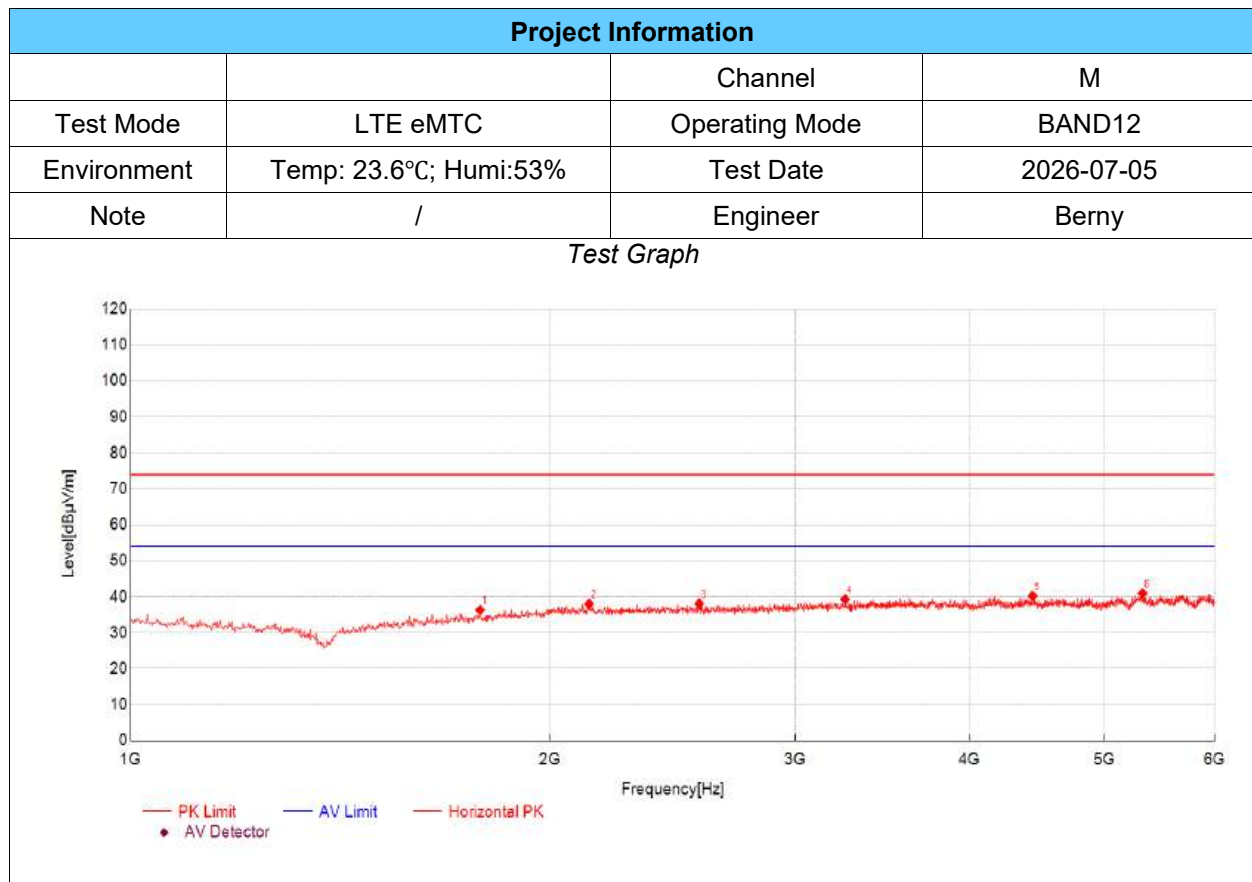

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 1781.93         | 56.47          | 36.32          | -20.15        | 74.00          | 37.68       | PK  | Horizontal | PASS    |
| 2                   | 2133.71         | 56.02          | 37.99          | -18.03        | 74.00          | 36.01       | PK  | Horizontal | PASS    |
| 3                   | 2558.85         | 55.02          | 38.08          | -16.94        | 74.00          | 35.92       | PK  | Horizontal | PASS    |
| 4                   | 3257.42         | 54.12          | 39.30          | -14.82        | 74.00          | 34.70       | PK  | Horizontal | PASS    |
| 5                   | 4439.48         | 52.27          | 40.22          | -12.05        | 74.00          | 33.78       | PK  | Horizontal | PASS    |
| 6                   | 5324.77         | 50.60          | 40.93          | -9.67         | 74.00          | 33.07       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

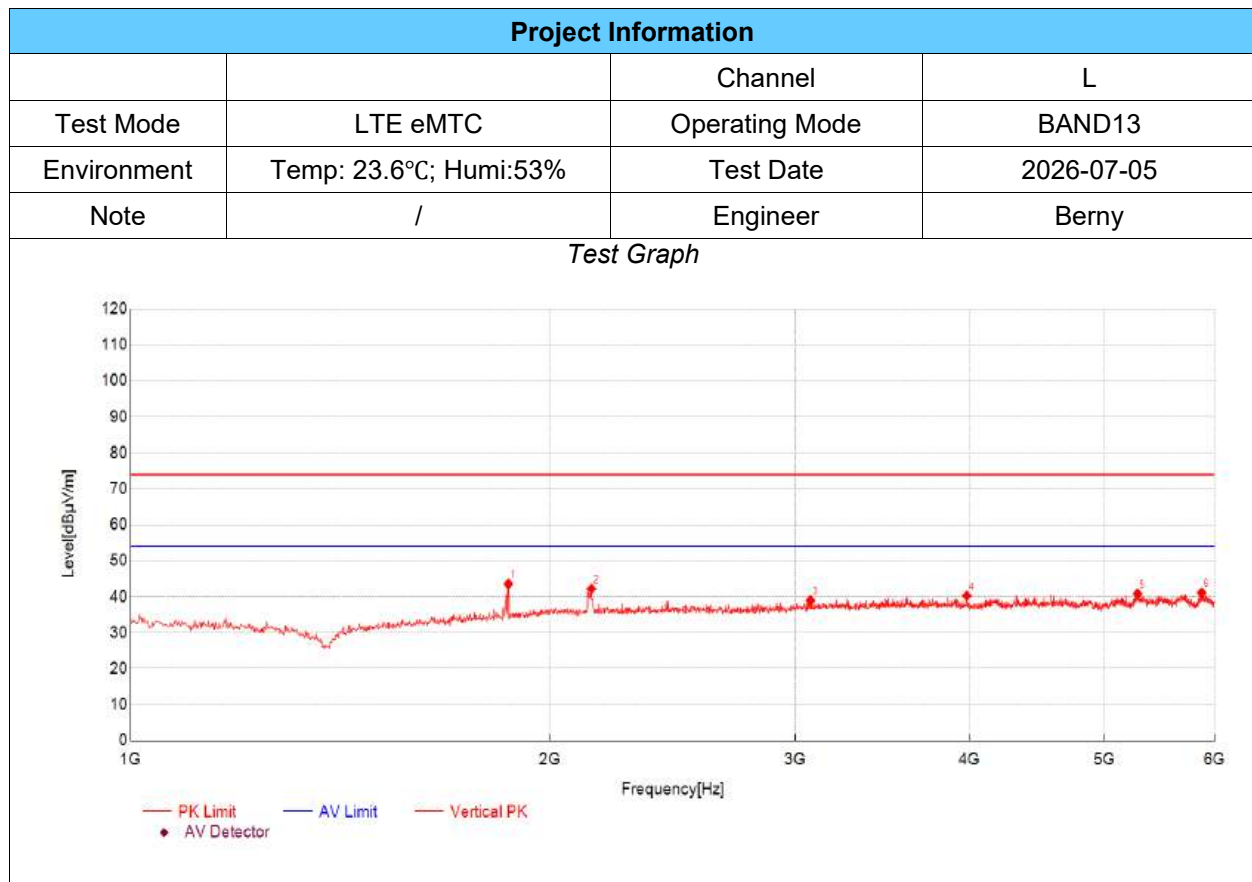

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1866.96         | 63.10          | 43.56          | -19.54        | 74.00          | 30.44       | PK  | Vertical | PASS    |
| 2                   | 2142.05         | 60.22          | 42.21          | -18.01        | 74.00          | 31.79       | PK  | Vertical | PASS    |
| 3                   | 3075.69         | 54.54          | 38.96          | -15.58        | 74.00          | 35.04       | PK  | Vertical | PASS    |
| 4                   | 3982.66         | 53.55          | 40.28          | -13.27        | 74.00          | 33.72       | PK  | Vertical | PASS    |
| 5                   | 5281.43         | 50.22          | 40.78          | -9.44         | 74.00          | 33.22       | PK  | Vertical | PASS    |
| 6                   | 5871.62         | 49.42          | 41.08          | -8.34         | 74.00          | 32.92       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

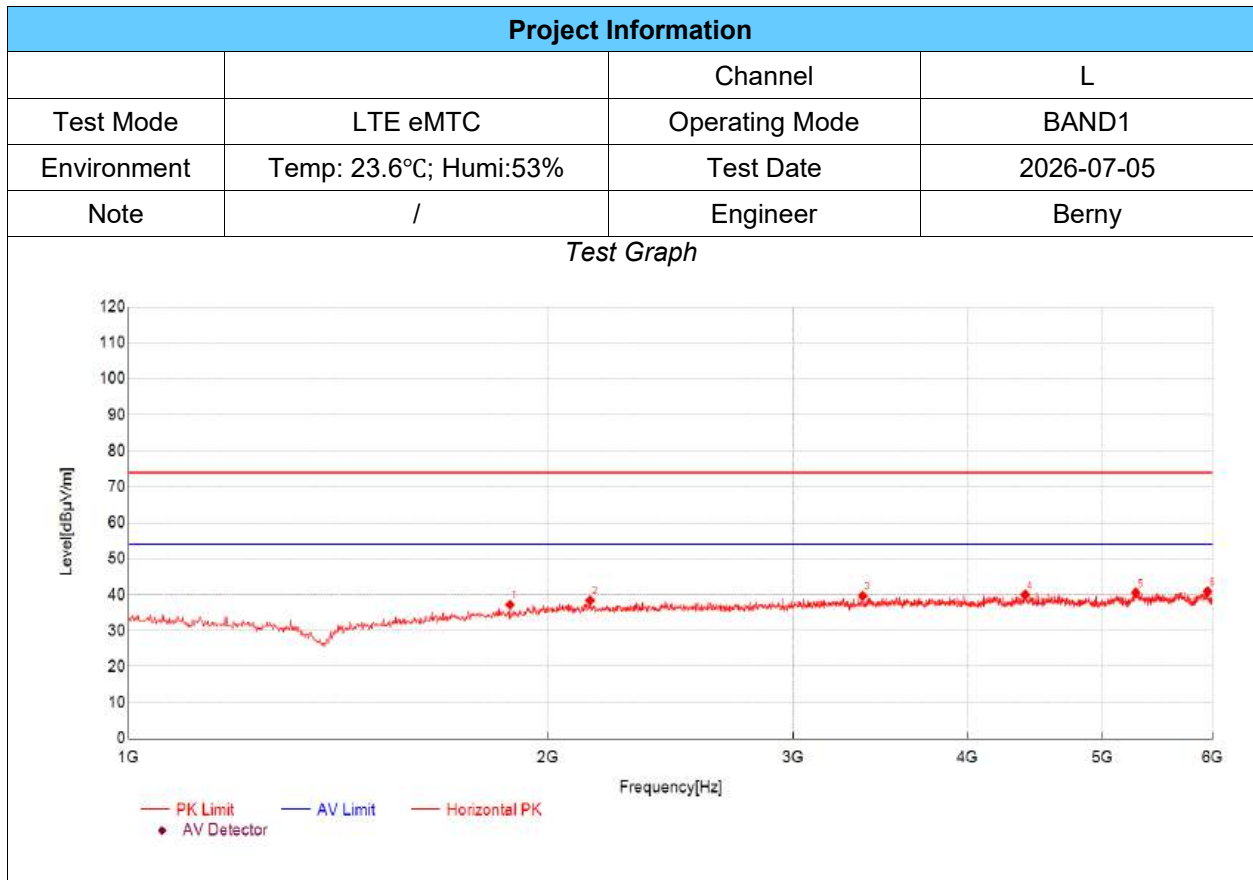

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 1878.63         | 56.67          | 37.22          | -19.45        | 74.00          | 36.78       | PK  | Horizontal | PASS    |
| 2                   | 2143.71         | 56.43          | 38.43          | -18.00        | 74.00          | 35.57       | PK  | Horizontal | PASS    |
| 3                   | 3364.12         | 54.27          | 39.64          | -14.63        | 74.00          | 34.36       | PK  | Horizontal | PASS    |
| 4                   | 4401.13         | 52.04          | 40.00          | -12.04        | 74.00          | 34.00       | PK  | Horizontal | PASS    |
| 5                   | 5283.09         | 49.95          | 40.52          | -9.43         | 74.00          | 33.48       | PK  | Horizontal | PASS    |
| 6                   | 5948.32         | 49.48          | 40.86          | -8.62         | 74.00          | 33.14       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

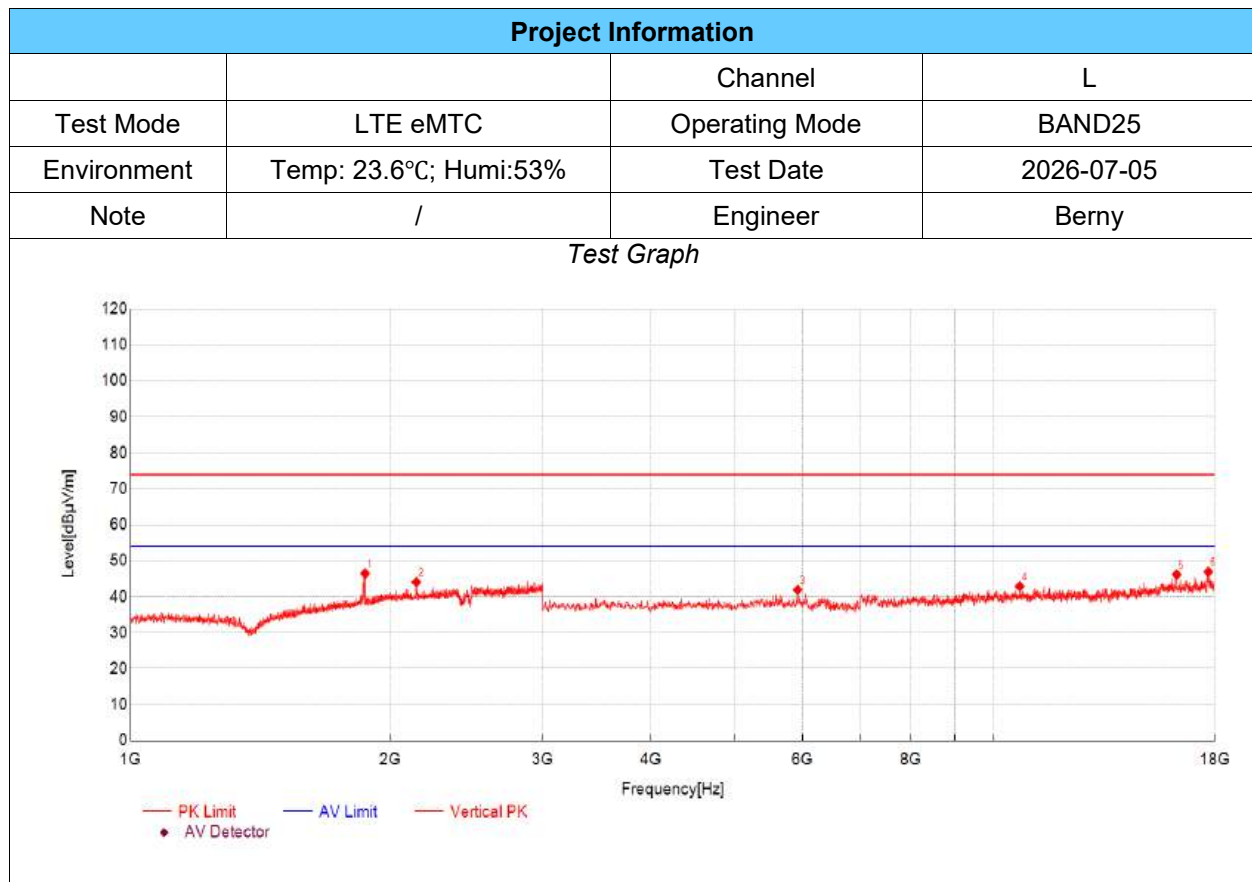

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1868.29         | 56.81          | 46.43          | -10.38        | 74.00          | 27.57       | PK  | Vertical | PASS    |
| 2                   | 2142.38         | 53.12          | 44.07          | -9.05         | 74.00          | 29.93       | PK  | Vertical | PASS    |
| 3                   | 5920.97         | 50.86          | 41.92          | -8.94         | 74.00          | 32.08       | PK  | Vertical | PASS    |
| 4                   | 10702.57        | 47.77          | 42.89          | -4.88         | 74.00          | 31.11       | PK  | Vertical | PASS    |
| 5                   | 16259.42        | 46.94          | 46.11          | -0.83         | 74.00          | 27.89       | PK  | Vertical | PASS    |
| 6                   | 17689.90        | 46.71          | 46.94          | 0.23          | 74.00          | 27.06       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

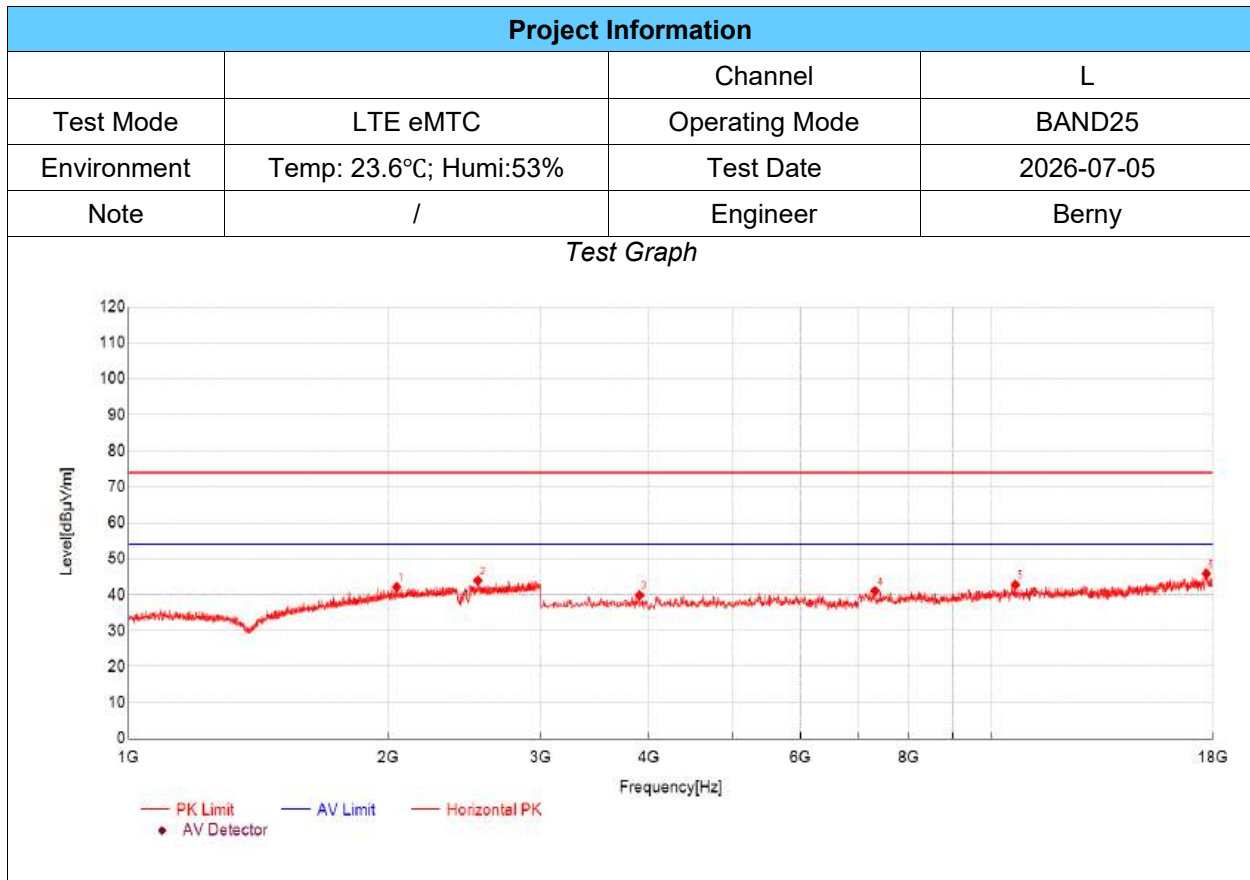

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2044.35         | 51.29          | 42.13          | -9.16         | 74.00          | 31.87       | PK  | Horizontal | PASS    |
| 2                   | 2538.51         | 52.39          | 43.94          | -8.45         | 74.00          | 30.06       | PK  | Horizontal | PASS    |
| 3                   | 3905.30         | 52.95          | 39.83          | -13.12        | 74.00          | 34.17       | PK  | Horizontal | PASS    |
| 4                   | 7316.44         | 48.79          | 41.03          | -7.76         | 74.00          | 32.97       | PK  | Horizontal | PASS    |
| 5                   | 10632.54        | 48.15          | 42.77          | -5.38         | 74.00          | 31.23       | PK  | Horizontal | PASS    |
| 6                   | 17689.90        | 45.59          | 45.82          | 0.23          | 74.00          | 28.18       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

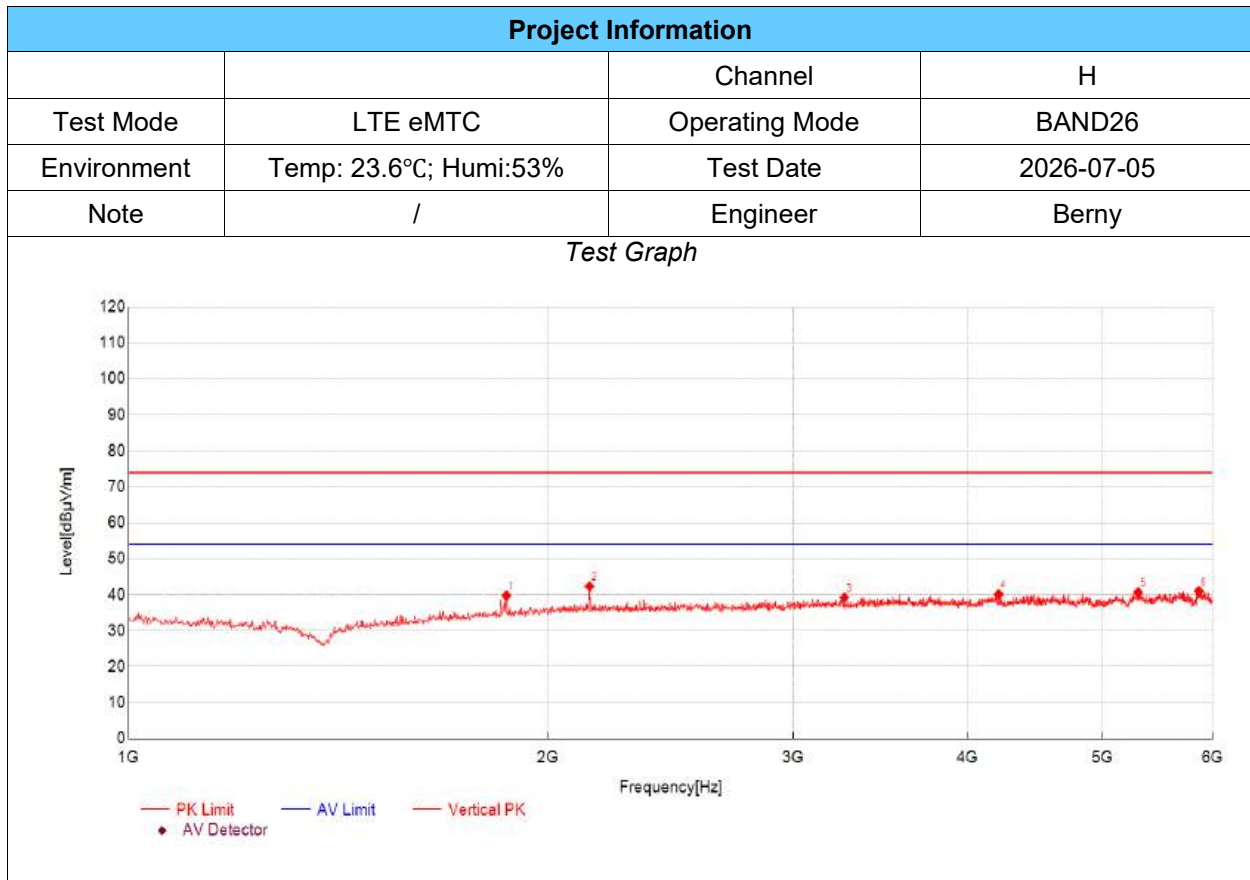

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 1866.96         | 59.28          | 39.74          | -19.54        | 74.00          | 34.26       | PK  | Vertical | PASS    |
| 2                   | 2142.05         | 60.34          | 42.33          | -18.01        | 74.00          | 31.67       | PK  | Vertical | PASS    |
| 3                   | 3264.09         | 54.06          | 39.22          | -14.84        | 74.00          | 34.78       | PK  | Vertical | PASS    |
| 4                   | 4211.07         | 52.48          | 40.12          | -12.36        | 74.00          | 33.88       | PK  | Vertical | PASS    |
| 5                   | 5304.77         | 49.99          | 40.64          | -9.35         | 74.00          | 33.36       | PK  | Vertical | PASS    |
| 6                   | 5863.29         | 49.28          | 41.01          | -8.27         | 74.00          | 32.99       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

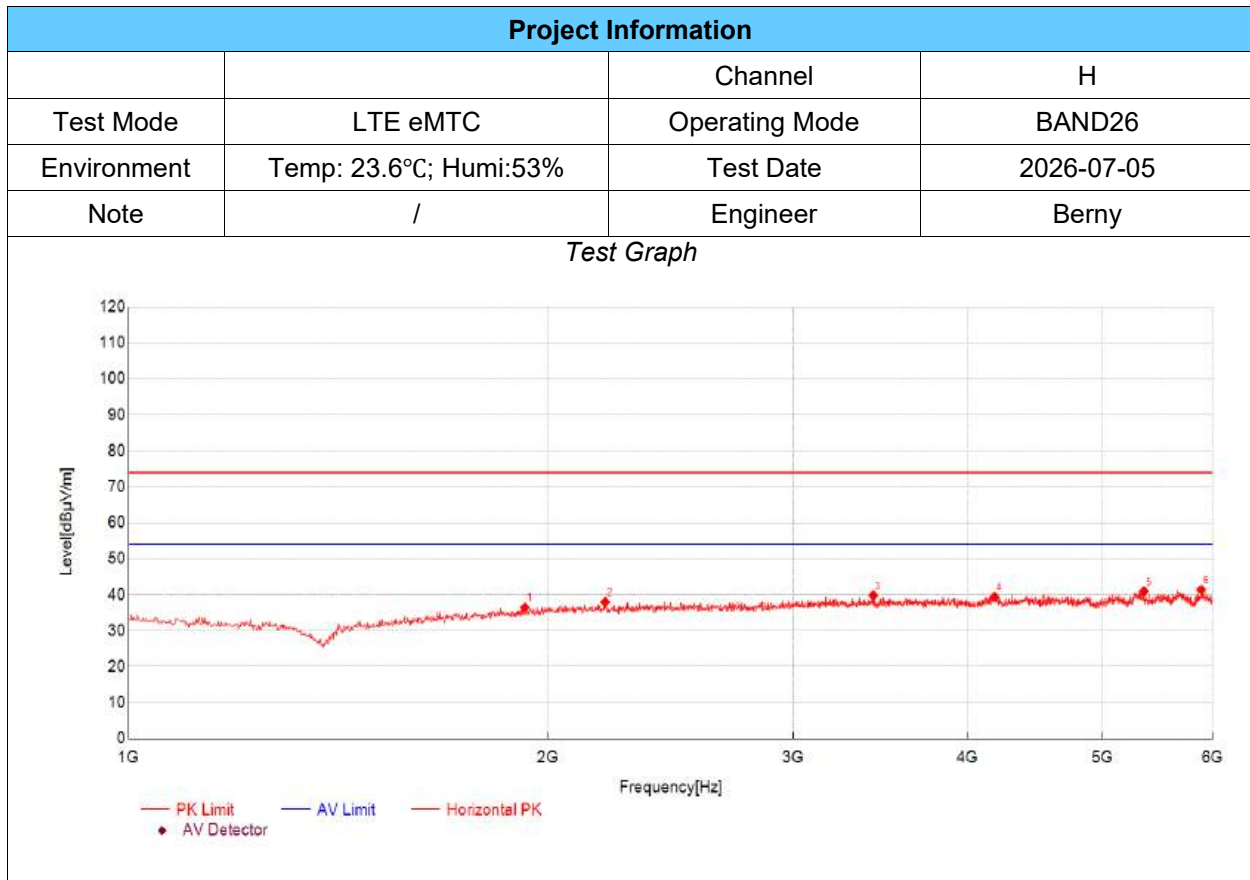

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 1925.31         | 55.45          | 36.45          | -19.00        | 74.00          | 37.55       | PK  | Horizontal | PASS    |
| 2                   | 2198.73         | 55.95          | 38.01          | -17.94        | 74.00          | 35.99       | PK  | Horizontal | PASS    |
| 3                   | 3424.14         | 54.13          | 39.79          | -14.34        | 74.00          | 34.21       | PK  | Horizontal | PASS    |
| 4                   | 4184.39         | 51.59          | 39.40          | -12.19        | 74.00          | 34.60       | PK  | Horizontal | PASS    |
| 5                   | 5354.78         | 50.73          | 40.91          | -9.82         | 74.00          | 33.09       | PK  | Horizontal | PASS    |
| 6                   | 5888.30         | 49.82          | 41.37          | -8.45         | 74.00          | 32.63       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

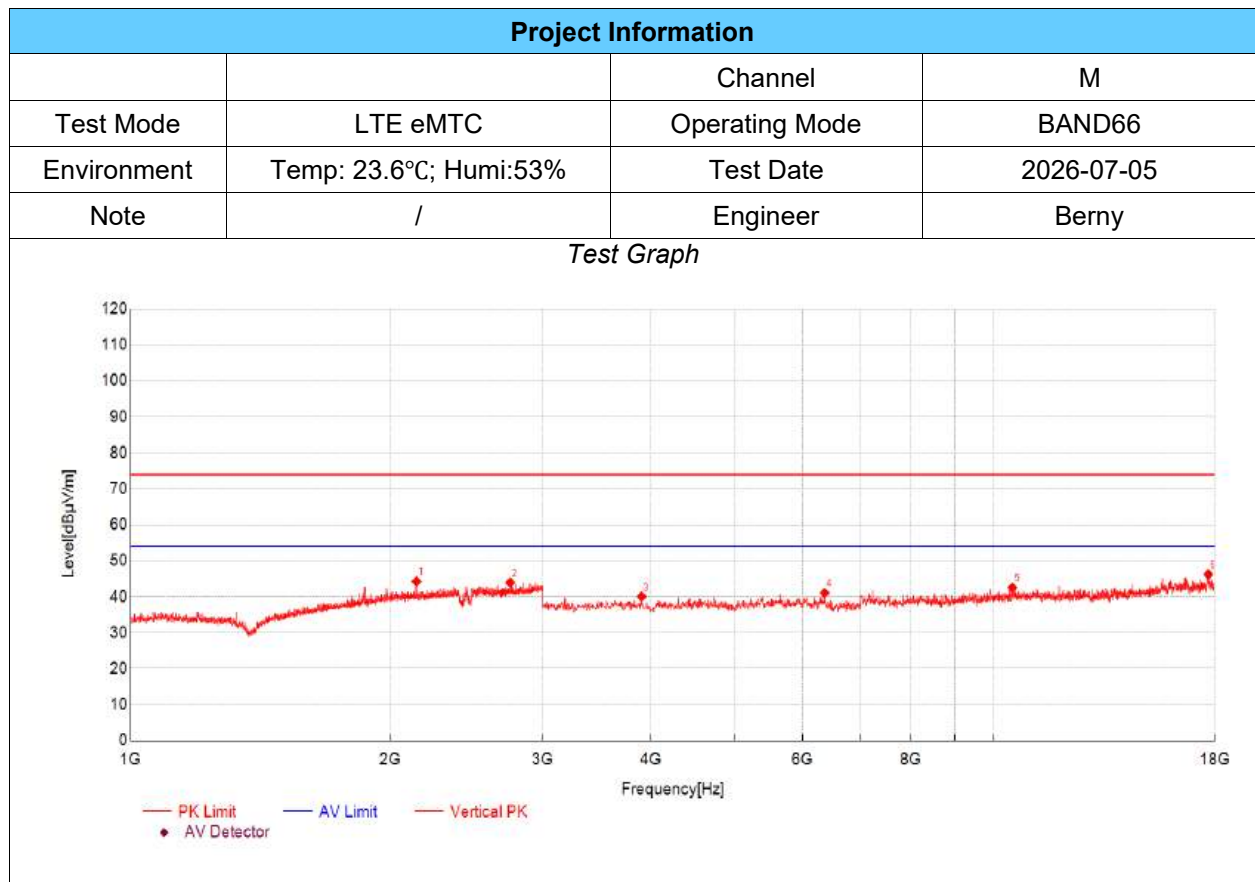

| Suspected Data List |                 |                |                |               |                |             |     |          |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|----------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol      | Verdict |
| 1                   | 2143.05         | 53.29          | 44.24          | -9.05         | 74.00          | 29.76       | PK  | Vertical | PASS    |
| 2                   | 2751.92         | 52.00          | 43.93          | -8.07         | 74.00          | 30.07       | PK  | Vertical | PASS    |
| 3                   | 3905.30         | 53.17          | 40.05          | -13.12        | 74.00          | 33.95       | PK  | Vertical | PASS    |
| 4                   | 6361.12         | 48.94          | 41.04          | -7.90         | 74.00          | 32.96       | PK  | Vertical | PASS    |
| 5                   | 10497.50        | 47.83          | 42.51          | -5.32         | 74.00          | 31.49       | PK  | Vertical | PASS    |
| 6                   | 17689.90        | 45.94          | 46.17          | 0.23          | 74.00          | 27.83       | PK  | Vertical | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

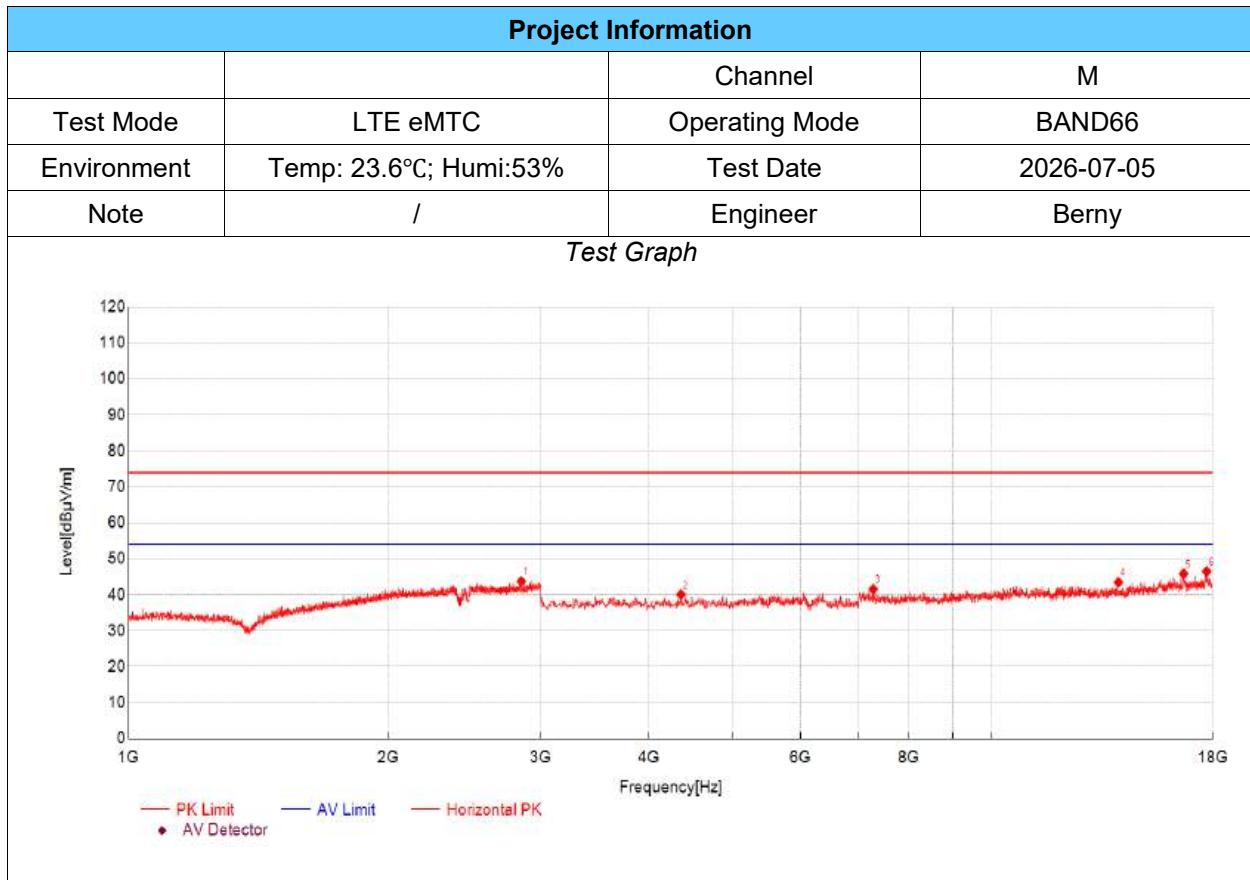

| Suspected Data List |                 |                |                |               |                |             |     |            |         |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|------------|---------|
| NO                  | Frequency [MHz] | Reading [dBμV] | Level [dBμV/m] | Factor [dB/m] | Limit [dBμV/m] | Margin [dB] | Det | Pol        | Verdict |
| 1                   | 2848.62         | 51.80          | 43.74          | -8.06         | 74.00          | 30.26       | PK  | Horizontal | PASS    |
| 2                   | 4360.45         | 52.19          | 40.04          | -12.15        | 74.00          | 33.96       | PK  | Horizontal | PASS    |
| 3                   | 7281.43         | 49.42          | 41.54          | -7.88         | 74.00          | 32.46       | PK  | Horizontal | PASS    |
| 4                   | 13993.66        | 47.05          | 43.48          | -3.57         | 74.00          | 30.52       | PK  | Horizontal | PASS    |
| 5                   | 16654.55        | 46.55          | 45.80          | -0.75         | 74.00          | 28.20       | PK  | Horizontal | PASS    |
| 6                   | 17704.90        | 46.37          | 46.44          | 0.07          | 74.00          | 27.56       | PK  | Horizontal | PASS    |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

For the frequency above 18 GHz, a pre-scan was performed, and the result was 20 dB lower than the limit line, the test data was not shown in the report.

**END OF REPORT**