



PRODUCT SPECIFICATION SHEET

APPELLATION: A11 Wireless transmitting single coil module.

MODE: YX-A11-R500800-G0845.

No.: _____.

生 产 方	TECHNICAL	QUALITY	PROJECT	DEVELOPING
	Jiuguijiang	wangshengli	wangchunxia	Jiuguijiang

客 户 方	Materials Engineer	Engineer	Approval	R & D System



Shenzhen Cilianda Electronics Co., Ltd.


Add: Floor 5, West Block, No.221 Niucheng Village, Xili Town,
Nanshan District, Shenzhen
Tel: 0755-27652992 29016433
Fax: 0755-27652977
E-mail: sales1@cd-tek.com
Web: www.cd-tek.com



CHANGE RESUME

[illegible]

1. DIMENSIONS & MARKING:

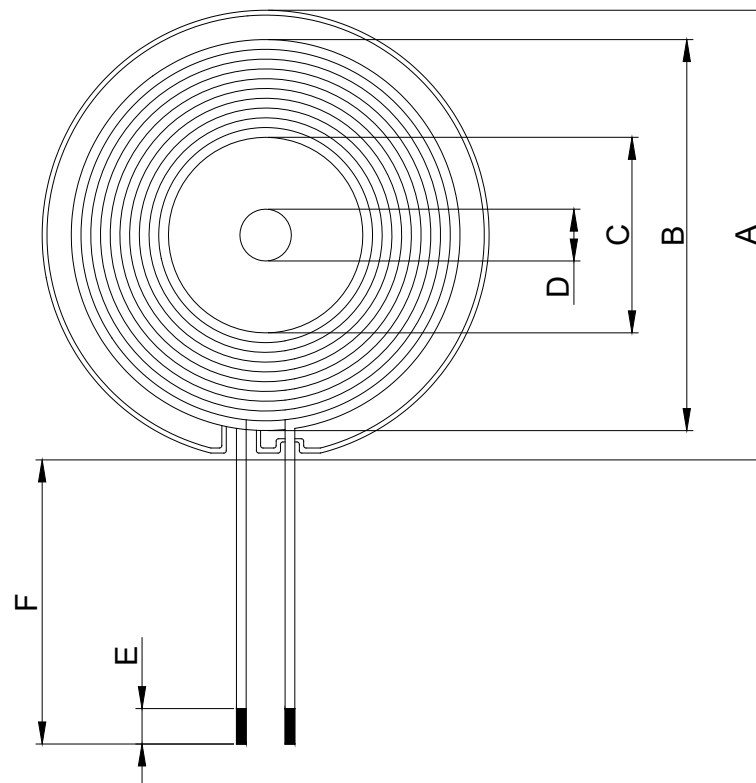

Symbol	A	B	C	D	E	F
Value(mm)	43.00MAX	40.00MAX	20.50	5.30	2.50±1.00	45.00±3.00

2. ELECTRICAL SPECIFICATIONS @25°C


- 2.1 Operating Temperature range: -40°C~+85°C
- 2.2 Storage temperature range: -25°C TO +125°C
- 2.3 The test frequency: 100 KHz, 100mV @ 25°C,65%
- 2.4 OCL : $6.30 \pm 5\% \mu\text{H}$.
- 2.5 Diameter : 0.08mm*105P
- 2.5 Turns Ratio: 10T

DRAWN BY:	CHECKED BY:	APPROVED BY:	CUSTOMER:
jiuguijiang	jiuguijiang	wangchunxia	PART NO. : YX-A11-R500853-G0845
CND-TEK Shenzhen Cilianda Electronics Co., Ltd.			REV. : A
			PAGE: 3 Of 4

3、 Bill of materials:

NO.	Material name	Specifications	Material use	Remarks
1	Silk covered wire	0.07mm*105P	√	
2	Self-adhesive line	0.07mm*105P		
3	Magnetic sheet	G50.0*5.3*1.0mm cut	√	
4	High temperature adhesive tape	8.00*0.05mm	√	
5	Adhesive sticker	T 45.0*5.5mm		
6	Glue	Environment-friendly water-based adhesive	√	
7	Tin bar	Sn97.3-0.7Cu	√	

4、 Packaging:

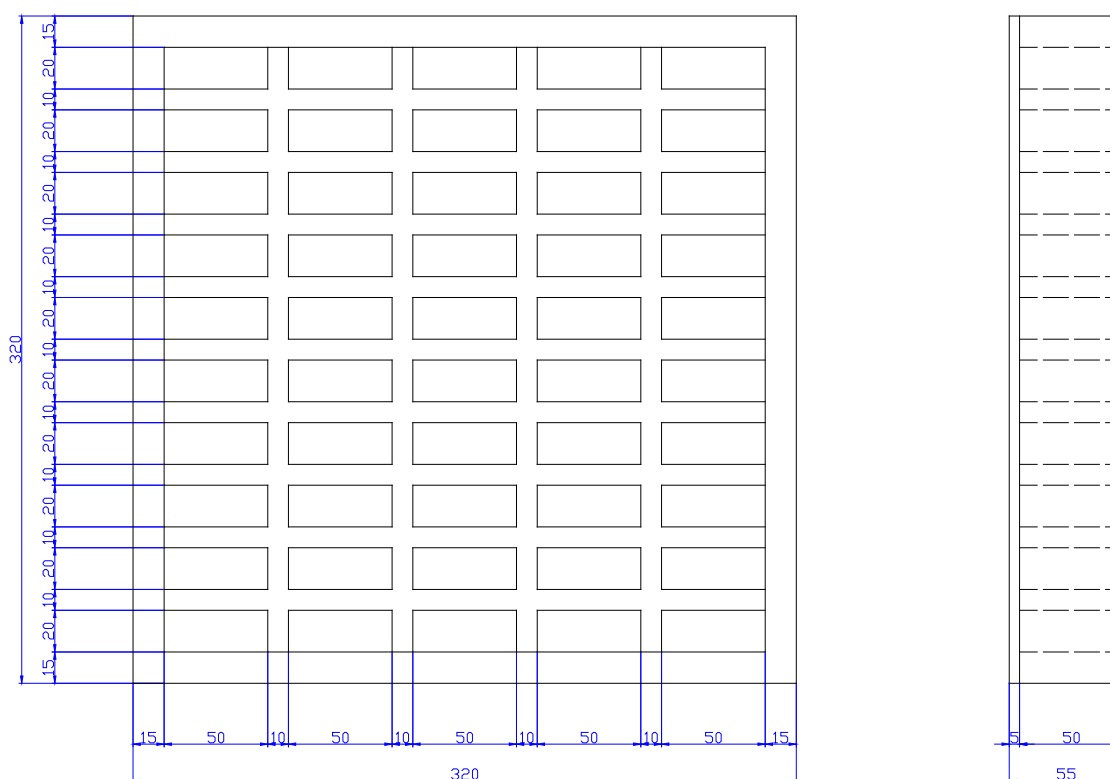

4.1 Quantity per grid: 6 PCS

4.2 Quantity per carton: 6*50 = 300PCS

4.3 Quantity per carton: 300*3 = 900PCS

4.4 Carton size: 350*350*180mm.

DRAWN BY:	CHECKED BY:	APPROVED BY:	CUSTOMER:
jiugujiang	jiugujiang	wangchunxia	PART NO. : YX-A11-R500853-G0845
CND-TEK Shenzhen Cilianda Electronics Co., Ltd.			REV. : A
			PAGE: 4 Of 4