



RX Antenna Specification						
Item	Antenna specifications					
Model name	2.4G Antenna					
Antenna type:	PCB Antenna					
Center frequency	Horizontal			Vertical		
	2400MHz	2450MHz	2500MHz	2400MHz	2450MHz	2500MHz
	-1.25	-0.72	-0.55	-5.12	-2.22	-1.75
Maximum gain	-0.55dBi					
Impedance	50ohm					
Antenna length	8.4mm					
Manufacturer	Shantou Hengzheng Technology Co., Ltd.					
Address	Batu Xingda Industrial Zone, Fengxiang Subdistrict, Chenghai District, Shantou City, Guangdong Province					

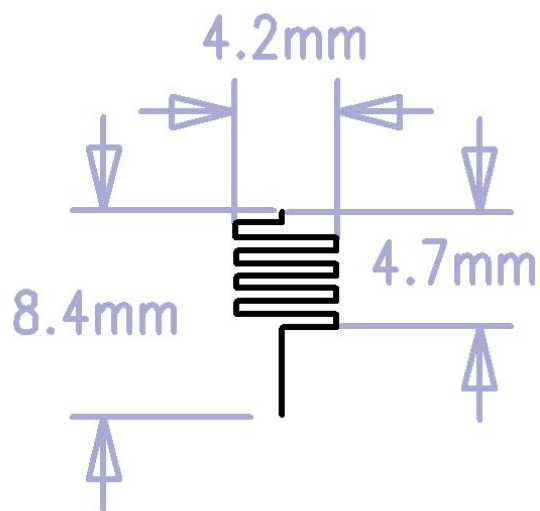

Horizontal: 2400 MHz 2450 MHz 2500 MHz

Power(dbm)

Max: 0 Min: -40 Scale: 5/div

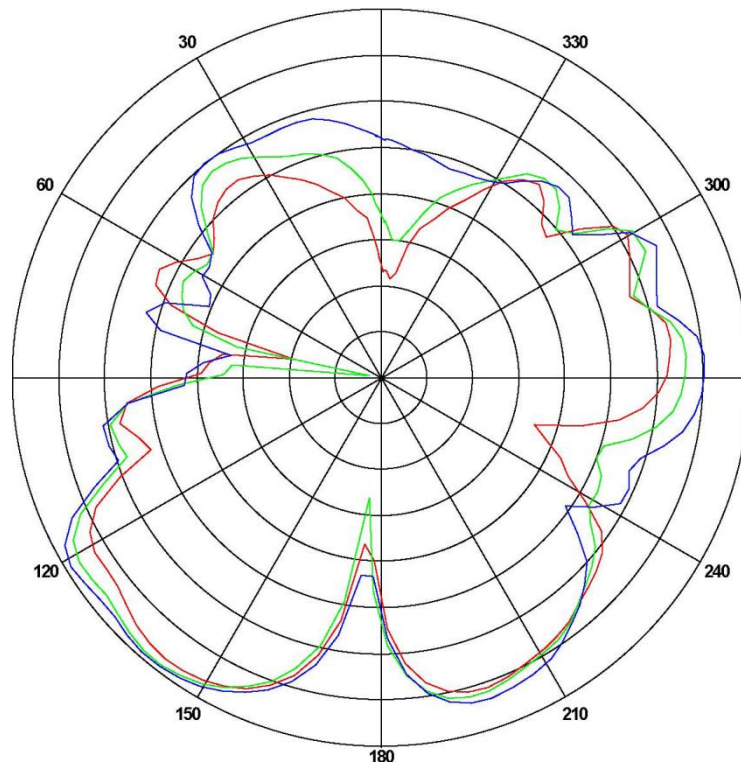


Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	-1.25	-30.08	-7.18
2450	-0.72	-36.56	-7.48
2500	-0.55	-22.03	-6.59

Vertical: 2400 MHz 2450 MHz 2500 MHz


Power(dbm)

Max: 0 Min: -30 Scale: 5/div

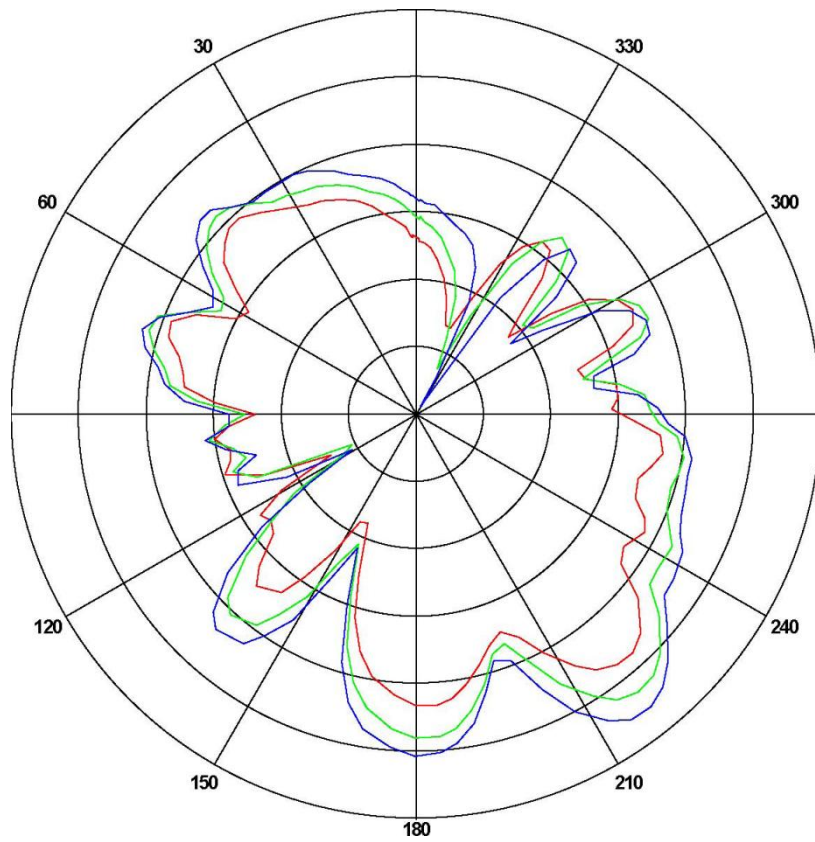

Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	-5.12	-22.14	-12.42
2450	-2.22	-24.58	-10.47
2500	-1.75	-29.52	-9.20

TX Antenna Specification						
Item	Antenna specifications					
Model name	2.4G Antenna					
Antenna type:	PCB Antenna					
Center frequency	Horizontal			Vertical		
	2400MHz	2450MHz	2500MHz	2400MHz	2450MHz	2500MHz
	-0.96	-0.37	-0.32	-3.36	-1.07	-0.98
Maximum gain	-0.32dBi					
Impedance	10ohm					
Antenna length	36mm					
Manufacturer	Shantou Hengzheng Technology Co., Ltd.					
Address	Batu Xingda Industrial Zone, Fengxiang Subdistrict, Chenghai District, Shantou City, Guangdong Province					

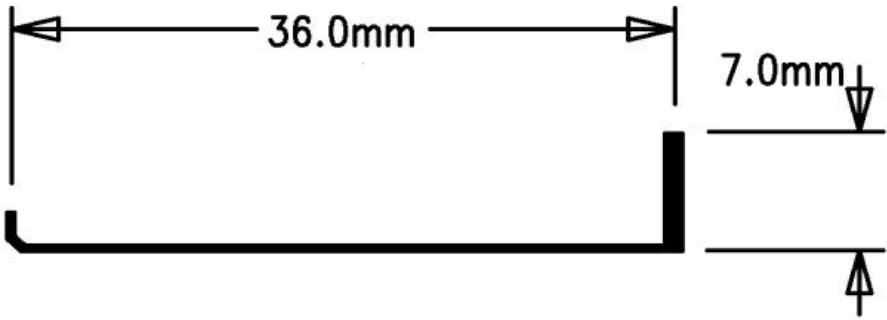

Radiation Pattern View

