


Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/9/12


Test Graph

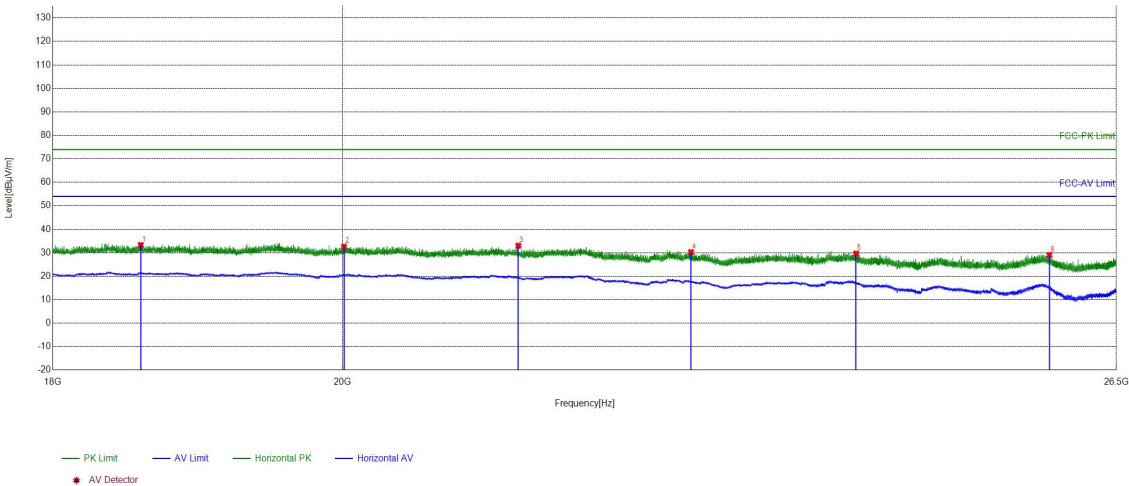

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18583.8034	-26.69	59.98	33.29	74.00	40.71	PASS	Horizontal	PK
2	20009.8204	-24.66	57.26	32.60	74.00	41.40	PASS	Horizontal	PK
3	21320.2328	-25.83	58.86	33.03	74.00	40.97	PASS	Horizontal	PK
4	22702.0481	-25.03	55.29	30.26	74.00	43.74	PASS	Horizontal	PK
5	24106.9843	-22.31	51.94	29.63	74.00	44.37	PASS	Horizontal	PK
6	25862.1345	-20.85	49.89	29.04	74.00	44.96	PASS	Horizontal	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/9/12


Test Graph

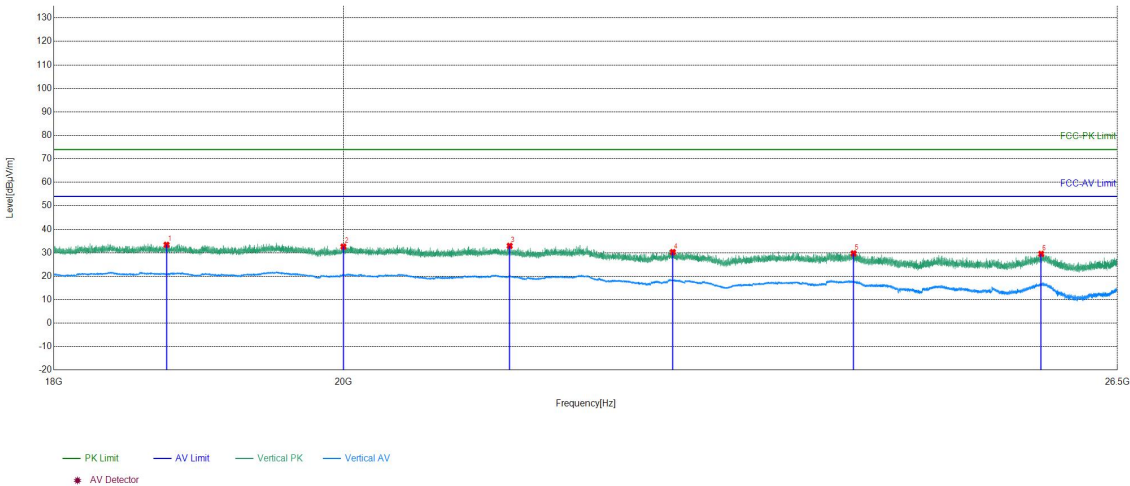

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18752.4501	-26.39	59.75	33.36	74.00	40.64	PASS	Vertical	PK
2	19998.2599	-24.62	57.23	32.61	74.00	41.39	PASS	Vertical	PK
3	21245.0898	-25.78	58.71	32.93	74.00	41.07	PASS	Vertical	PK
4	22544.2818	-25.02	55.29	30.27	74.00	43.73	PASS	Vertical	PK
5	24075.703	-22.21	51.93	29.72	74.00	44.28	PASS	Vertical	PK
6	25776.111	-20.80	50.31	29.51	74.00	44.49	PASS	Vertical	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2437MHz
Tset_Engineer	\	Test_Date	2026/9/12


Test Graph

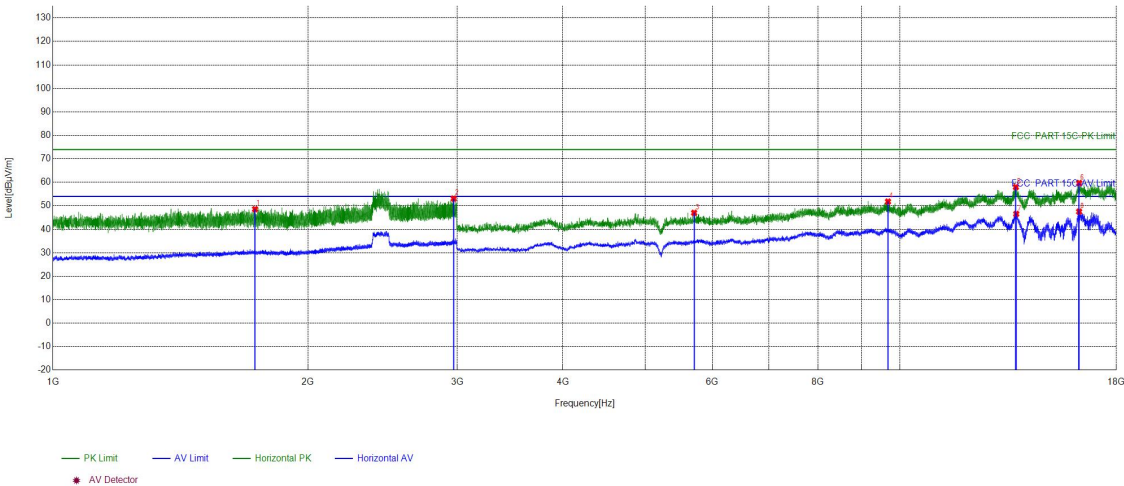

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1732.0488	14.17	34.41	48.58	74.00	25.42	PASS	Horizontal	PK
2	2971.8648	17.92	35.16	53.08	74.00	20.92	PASS	Horizontal	PK
3	5713.1809	-6.04	53.05	47.01	74.00	26.99	PASS	Horizontal	PK
4	9677.4452	1.24	50.55	51.79	74.00	22.21	PASS	Horizontal	PK
5	13699.7133	7.26	50.71	57.97	74.00	16.03	PASS	Horizontal	PK
6	16271.8848	10.67	49.04	59.71	74.00	14.29	PASS	Horizontal	PK
7	13712.7142	7.24	39.29	46.53	54.00	7.47	PASS	Horizontal	AV
8	16268.8846	10.63	36.87	47.50	54.00	6.50	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2437MHz
Tset_Engineer	\	Test_Date	2026/9/12


Test Graph

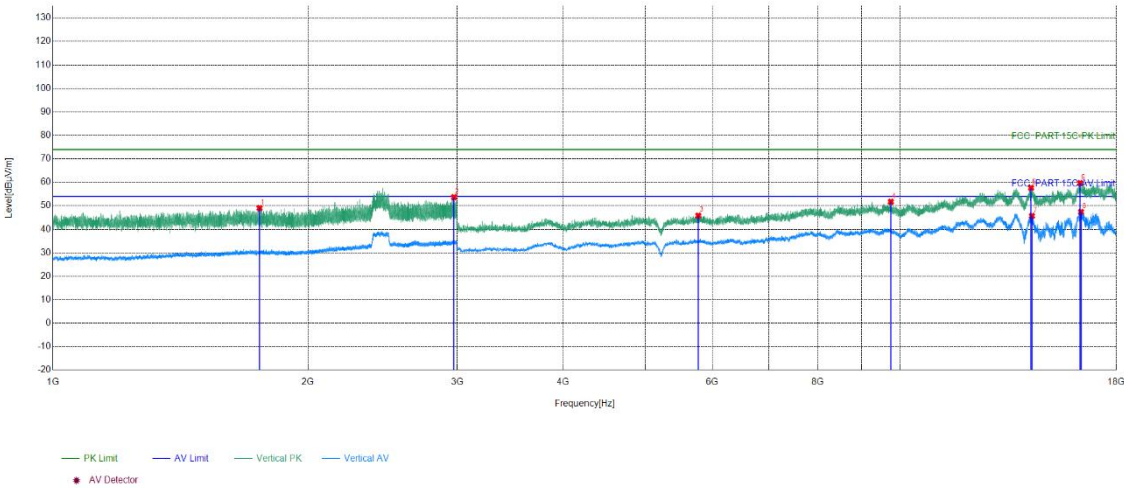

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1753.1169	14.11	34.90	49.01	74.00	24.99	PASS	Vertical	PK
2	2974.3983	17.91	35.74	53.65	74.00	20.35	PASS	Vertical	PK
3	5778.1852	-5.83	51.62	45.79	74.00	28.21	PASS	Vertical	PK
4	9752.4502	1.31	50.41	51.72	74.00	22.28	PASS	Vertical	PK
5	14276.7518	8.72	48.91	57.63	74.00	16.37	PASS	Vertical	PK
6	16312.8875	11.13	48.53	59.66	74.00	14.34	PASS	Vertical	PK
7	14309.754	8.64	37.03	45.67	54.00	8.33	PASS	Vertical	AV
8	16350.8901	11.56	35.81	47.37	54.00	6.63	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2437MHz
Tset_Engineer	\	Test_Date	2026/9/12


Test Graph

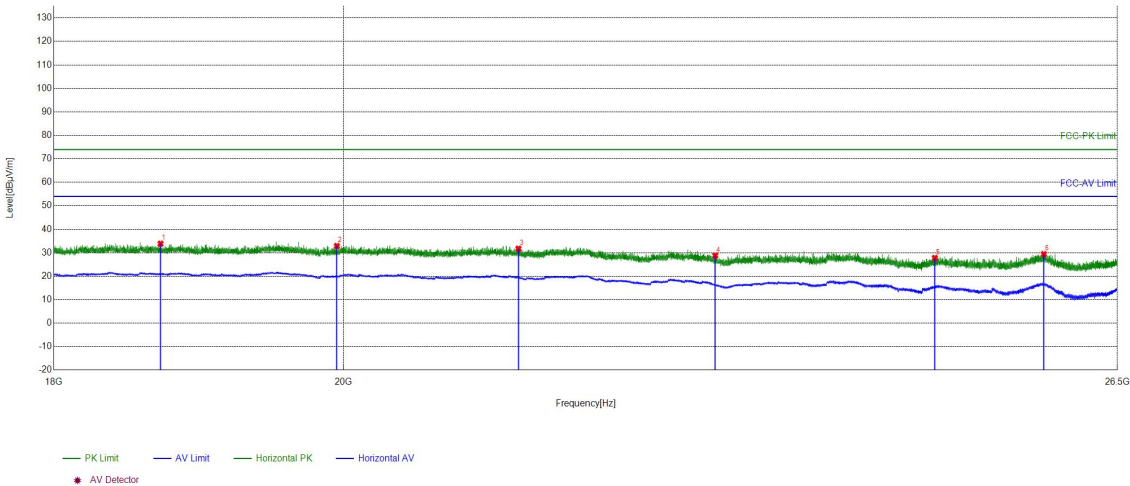

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18711.3085	-26.47	60.33	33.86	74.00	40.14	PASS	Horizontal	PK
2	19950.998	-24.77	57.62	32.85	74.00	41.15	PASS	Horizontal	PK
3	21313.0925	-25.83	57.55	31.72	74.00	42.28	PASS	Horizontal	PK
4	22894.8358	-25.35	54.16	28.81	74.00	45.19	PASS	Horizontal	PK
5	24798.2319	-21.96	49.72	27.76	74.00	46.24	PASS	Horizontal	PK
6	25800.932	-20.82	50.22	29.40	74.00	44.60	PASS	Horizontal	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2437MHz
Tset_Engineer	\	Test_Date	2026/9/12


Test Graph

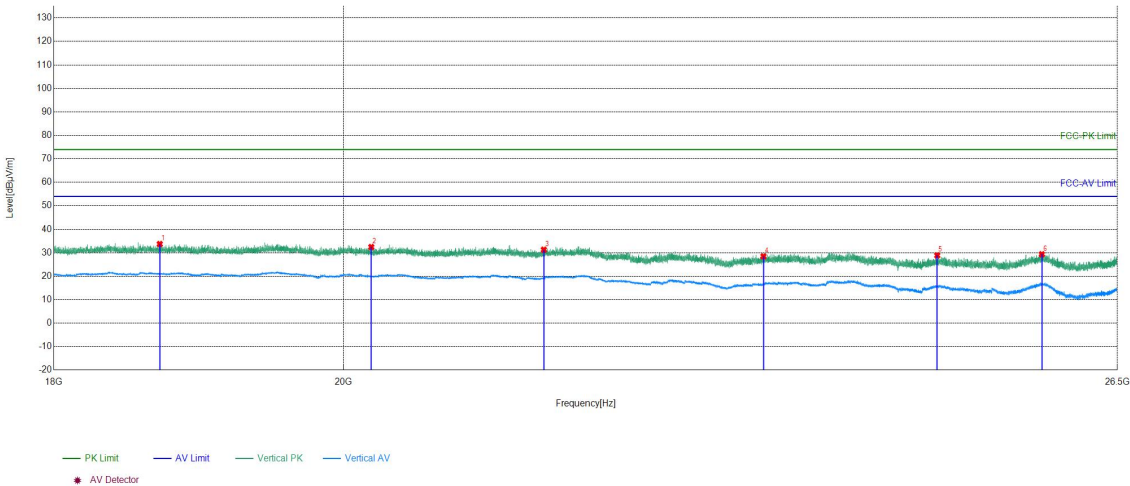

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18705.8682	-26.48	60.19	33.71	74.00	40.29	PASS	Vertical	PK
2	20202.2681	-25.51	57.95	32.44	74.00	41.56	PASS	Vertical	PK
3	21510.3004	-25.80	57.08	31.28	74.00	42.72	PASS	Vertical	PK
4	23299.792	-23.92	52.39	28.47	74.00	45.53	PASS	Vertical	PK
5	24819.6528	-21.97	50.85	28.88	74.00	45.12	PASS	Vertical	PK
6	25782.2313	-20.81	50.15	29.34	74.00	44.66	PASS	Vertical	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/9/12


Test Graph

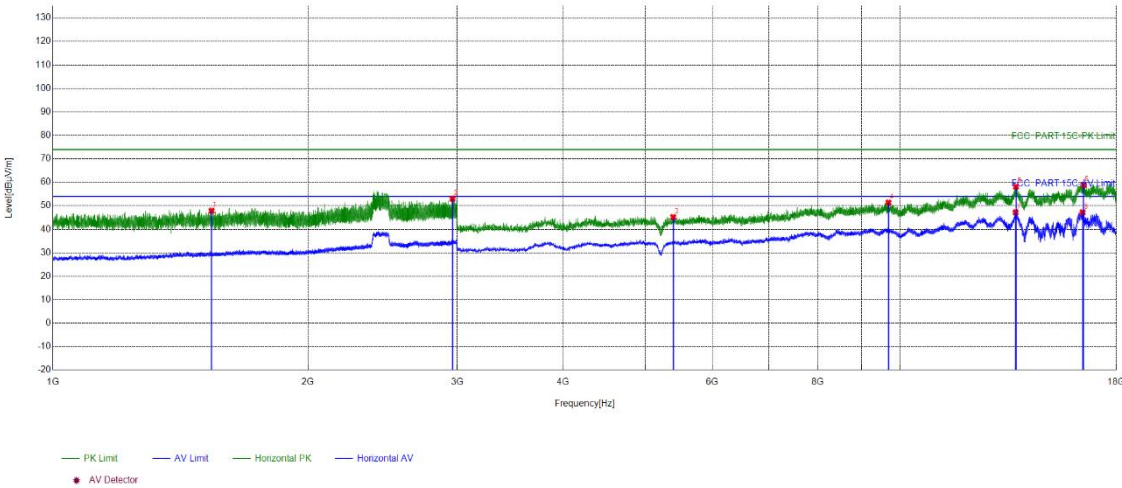

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1538.8359	13.49	34.38	47.87	74.00	26.13	PASS	Horizontal	PK
2	2962.5308	17.80	35.20	53.00	74.00	21.00	PASS	Horizontal	PK
3	5397.1598	-6.74	51.90	45.16	74.00	28.84	PASS	Horizontal	PK
4	9688.4459	1.24	50.11	51.35	74.00	22.65	PASS	Horizontal	PK
5	13702.7135	7.26	50.85	58.11	74.00	15.89	PASS	Horizontal	PK
6	16467.8979	11.33	47.49	58.82	74.00	15.18	PASS	Horizontal	PK
7	13690.7127	7.29	39.90	47.19	54.00	6.81	PASS	Horizontal	AV
8	16422.8949	10.43	36.73	47.16	54.00	6.84	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/9/12


Test Graph

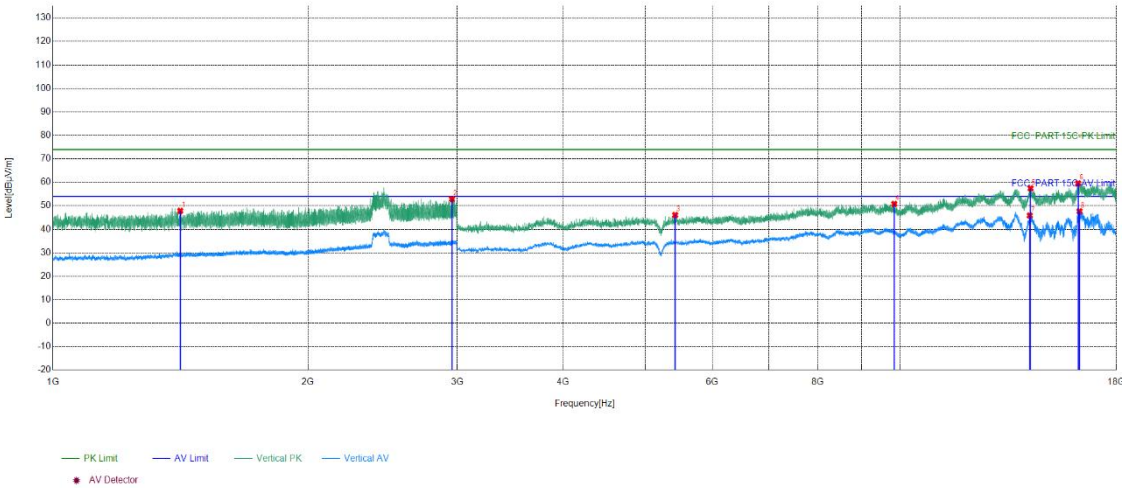

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1413.2275	12.90	34.96	47.86	74.00	26.14	PASS	Vertical	PK
2	2958.2639	17.72	35.14	52.86	74.00	21.14	PASS	Vertical	PK
3	5426.1617	-6.57	52.63	46.06	74.00	27.94	PASS	Vertical	PK
4	9842.4562	1.33	49.46	50.79	74.00	23.21	PASS	Vertical	PK
5	14257.7505	8.87	48.57	57.44	74.00	16.56	PASS	Vertical	PK
6	16223.8816	10.42	49.14	59.56	74.00	14.44	PASS	Vertical	PK
7	14226.7484	8.64	37.22	45.86	54.00	8.14	PASS	Vertical	AV
8	16283.8856	10.80	36.86	47.66	54.00	6.34	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/9/12


Test Graph

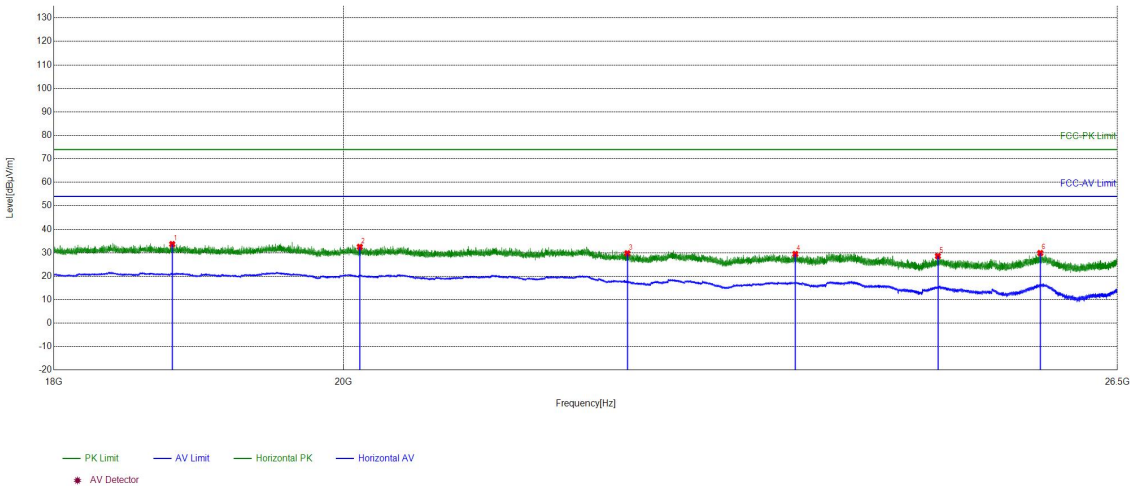

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18791.2116	-26.31	59.97	33.66	74.00	40.34	PASS	Horizontal	PK
2	20117.9447	-25.14	57.63	32.49	74.00	41.51	PASS	Horizontal	PK
3	22174.007	-25.46	55.20	29.74	74.00	44.26	PASS	Horizontal	PK
4	23571.1228	-23.13	52.59	29.46	74.00	44.54	PASS	Horizontal	PK
5	24825.773	-21.99	50.57	28.58	74.00	45.42	PASS	Horizontal	PK
6	25767.6107	-20.81	50.68	29.87	74.00	44.13	PASS	Horizontal	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/9/12

Test Graph

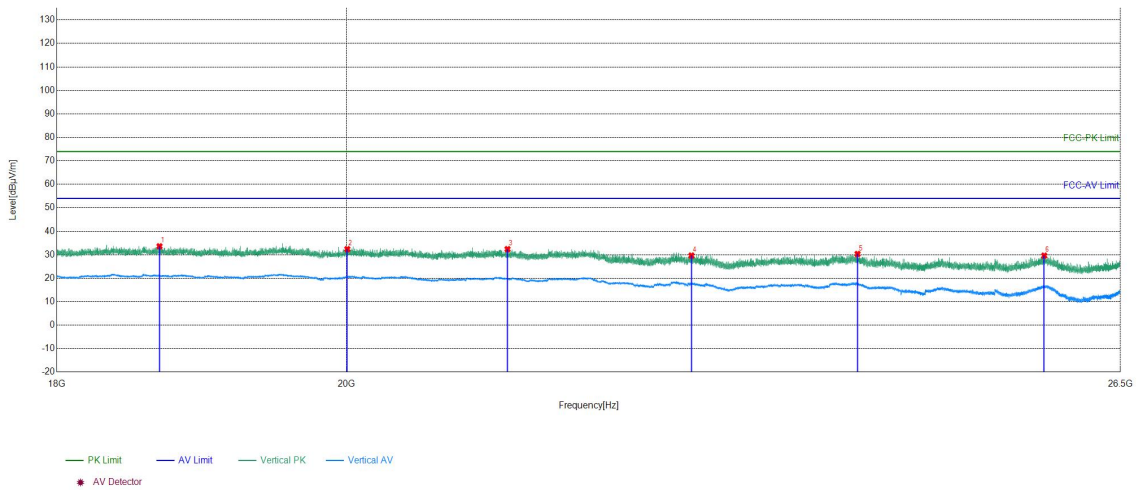

Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18683.7674	-26.52	60.11	33.59	74.00	40.41	PASS	Vertical	PK
2	20005.0602	-24.64	57.02	32.38	74.00	41.62	PASS	Vertical	PK
3	21205.3082	-25.75	58.13	32.38	74.00	41.62	PASS	Vertical	PK
4	22672.1269	-25.02	54.67	29.65	74.00	44.35	PASS	Vertical	PK
5	24084.5434	-22.24	52.57	30.33	74.00	43.67	PASS	Vertical	PK
6	25776.4511	-20.80	50.40	29.60	74.00	44.40	PASS	Vertical	PK


Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. As the PK values are all below 54dBμV/m. So, only the peak measurements were shown in the report.

Restricted bands:

Test_Mode	802.11 b Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/9/12


Test Graph

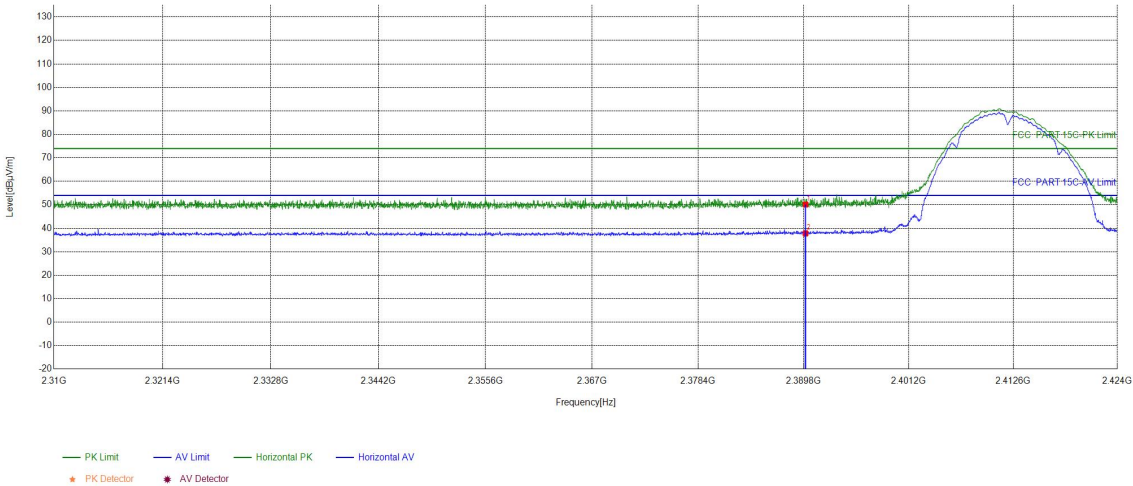

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	34.19	50.15	74.00	23.85	PASS	Horizontal	PK
2	2390	15.96	21.87	37.83	54.00	16.17	PASS	Horizontal	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/9/12


Test Graph

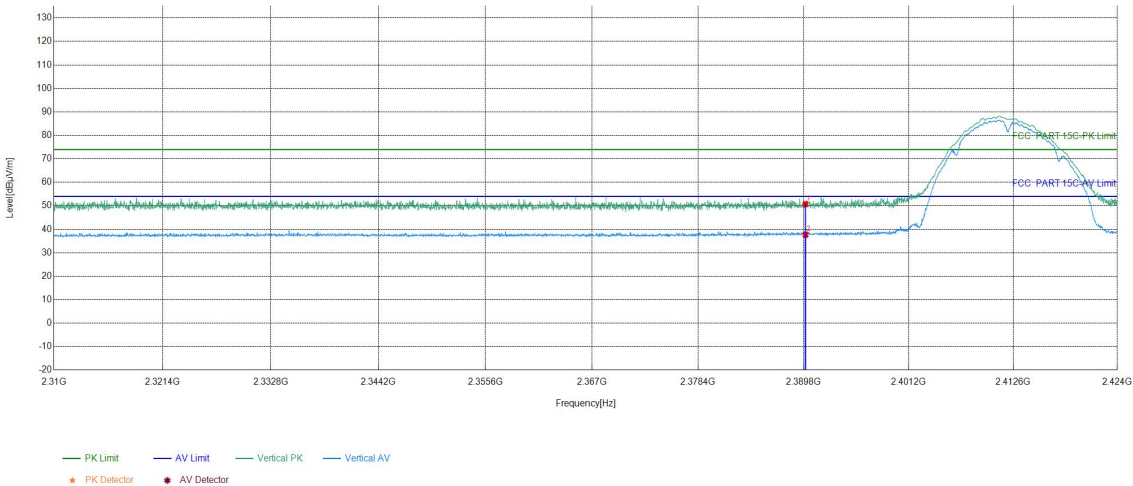

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	34.77	50.73	74.00	23.27	PASS	Vertical	PK
2	2390	15.96	21.73	37.69	54.00	16.31	PASS	Vertical	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/9/12


Test Graph

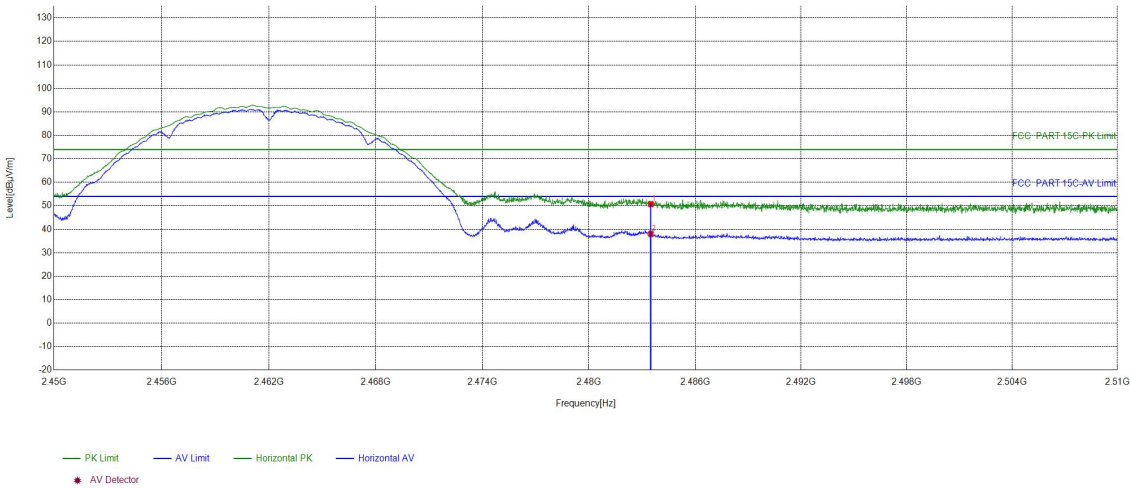

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.45	50.74	74.00	23.26	PASS	Horizontal	PK
2	2483.5	16.29	21.76	38.05	54.00	15.95	PASS	Horizontal	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2462MHz
Tset_Engineer	\	Test_Date	2026/9/12


Test Graph

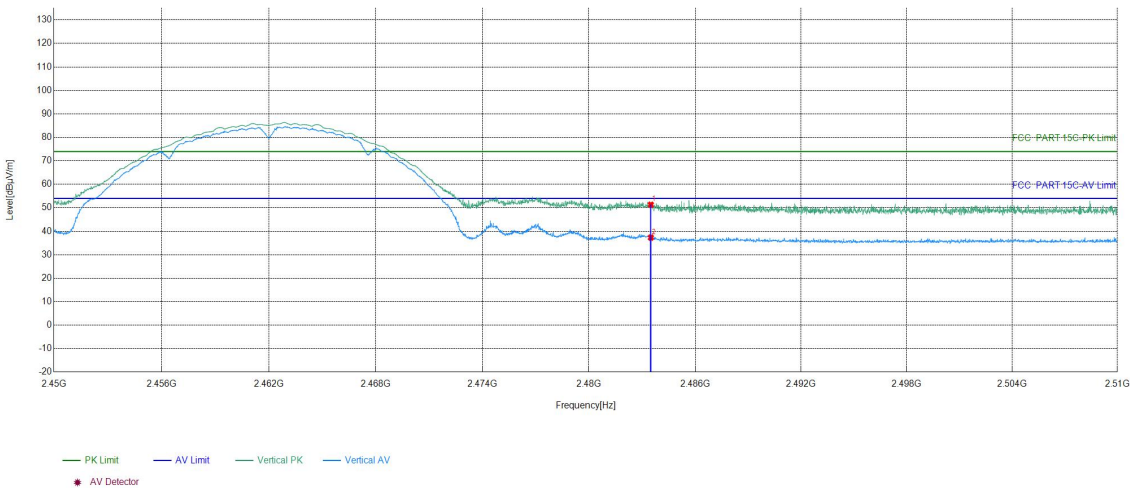

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.03	51.32	74.00	22.68	PASS	Vertical	PK
2	2483.5	16.29	21.02	37.31	54.00	16.69	PASS	Vertical	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/9/12


Test Graph

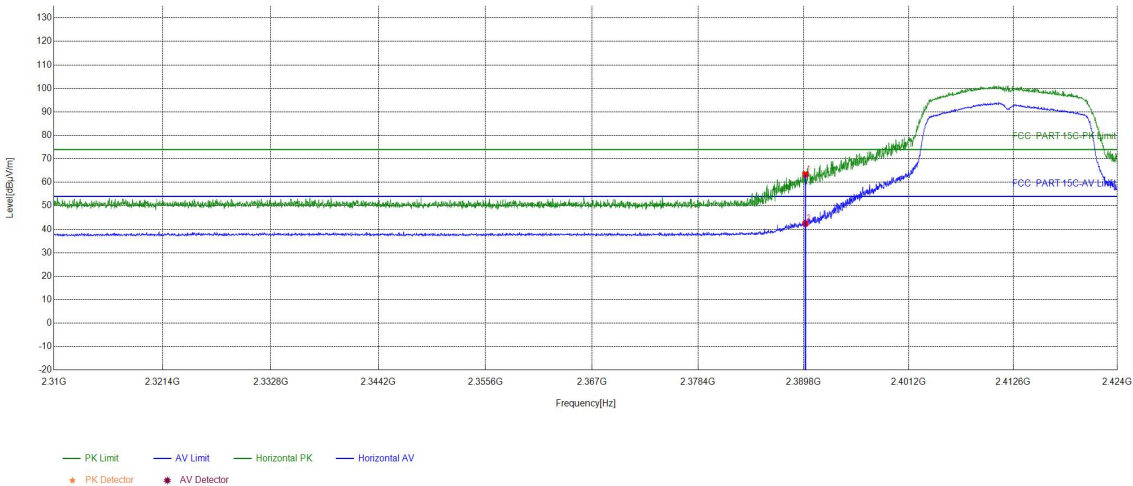

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	47.45	63.41	74.00	10.59	PASS	Horizontal	PK
2	2390	15.96	26.49	42.45	54.00	11.55	PASS	Horizontal	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Tset_Engineer	\	Test_Date	2026/9/12

Test Graph

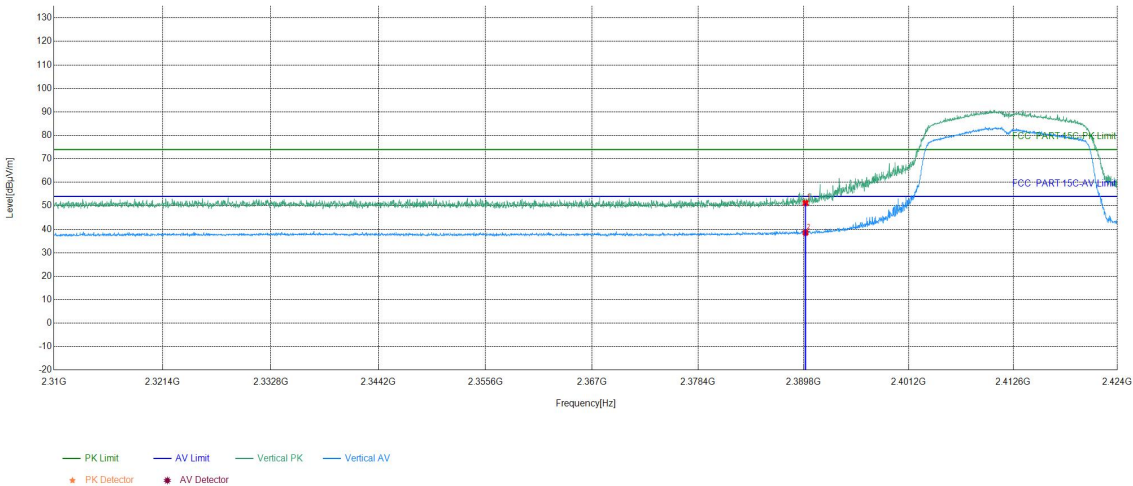

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.21	51.17	74.00	22.83	PASS	Vertical	PK
2	2390	15.96	22.59	38.55	54.00	15.45	PASS	Vertical	AV