

SPECIFICATION APPROVAL

CUSTOMER : Shenzhen power technology co., LTD

Product Name of Customer _____ MPP Coil module

product Name of Ours (Material) _____ MPP Coil module

APPROVED: Li Bowen _____

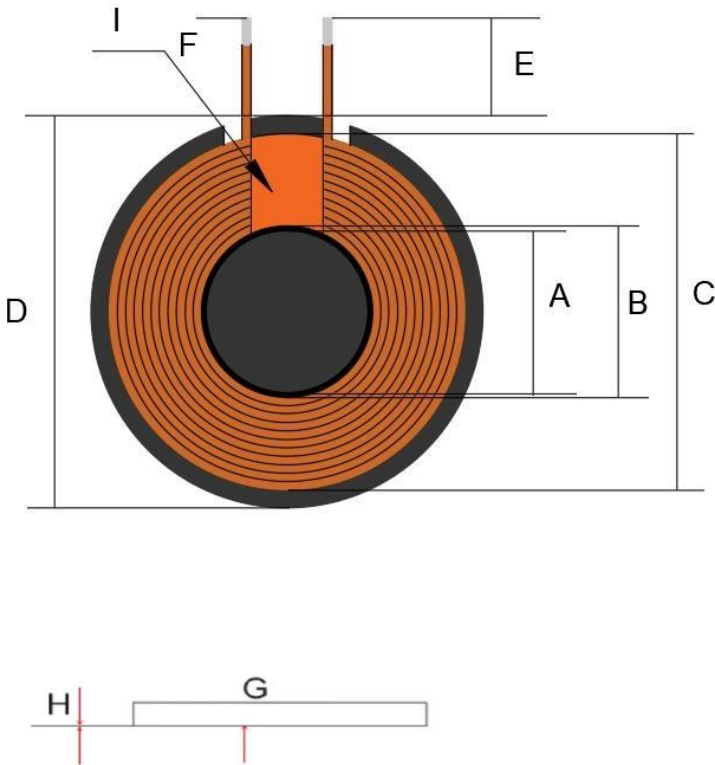
APPROVED: Li Bowen **DRAWN:** Li Bei **DATE:** 24-4-8

DONGGUAN BOHONG TECHNOLOGY CO., LTD

TEL: 0769-82866410

FAX: 0769-82866409

Address: No. 533 Fumin Middle Road, Dalang Town, Dongguan City,
Guangdong Province, P.R. China

Specification			CISTOME P/N:	MPP Coil module				
			PARTNUMBER:	Y.A11.358				
1.DIMENSIONS: mm 			A	18±0.5				
			B	20±0.5				
			C	38.9±0.3				
			D	42.5±0.5				
			E	10±1				
			F	3±1.5				
			G	Total thickness: 2.4MAX				
			H	Magnetic disc: 0.75±0.1				
			I	8±1				
			J					
			k					
			L					
			M					
			N					
			O					
			R					
			Q					
			P					
			APPROVED BY		CHECKED BY	PREPARED BY	DATE	PAGE
			Li Bowen		Cheng Jie	Li Bei	24-4-8	2 of 4

Specifcation					CUSTOMERP/N:		MPP Coil module	
					PARTNUMBER:		Y.A11.358	
5.WINDING DETAILS:								
Wdy.NO.	Start	Finish	Turns	Wire Dia	Wdg.TyepeSprad/Close	Wdg.Directio n	Turns/Layer	
	S	F	11TS	0.08*65P	Close	Anticlockwise	1 layer/11 circles	
6.ELECTRICAL CHARACTERISTICS								
PARAMETERS					UNIN		LIMITI	
Inductance Is@100KHz/1v					UH		7.8uH±10%	
Q @100KHz/1v							50 Min	
DCR @100KHz/1v					m Ω		68mΩ Max	
APPROVED BY		CHECKED BY		PREPARED BY		DATE		PAGE
Li Bowen		Cheng Jie		Li Bei		24-4-8		3 of 4

MATERIAL LIST				CUSTOMER P/N:	MPP Coil module
				PARTNUMBER:	Y.A11.358
NO.	Material name	Description	Manufacturer	Material	
1	Acetone silk wrap	0.08*65P		99.95% copper	
2	Solder Bar	high temperature			
3	High-temperature adhesive	0.025*5			
4	Glue	Resin adhesive			
5	Magnetic disc	42.5*0.75		Ferrites - Manganese zinc PC40	
6	Double-sided tape	Hand tear position adhesive			
7	Pearl cotton	270*380*55			
8	Cton	280*390*190			
APPROVED BY		CHECKED BY	PREPARED BY	DATE	PAGE
Li Bowen		Cheng Jie	Li Bei	24-4-8	4 of 4