PCTEST
7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
http://www.pctest.com



PART 22 MEASUREMENT REPORT

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:
06/30/2021 - 07/16/2021
Test Site/Location:
PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
1M2106280072-02.A3L

AFCC ID:	**A3LSMA528B**
Applicant Name:	**Samsung Electronics Co., Ltd.**

Application Type:	Certification
Model:	SM-A528B/DS
Additional Model(s):	SM-A528B
EUT Type:	Portable Handset
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part:	22
Test Procedure(s):	ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez
President

ACCREDITED
CERT #2041.01

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

TABLE OF CONTENTS

1.0 INTRODUCTION 4
1.1 Scope 4
1.2 PCTEST Test Location 4
1.3 Test Facility / Accreditations 4
2.0 PRODUCT INFORMATION 5
2.1 Equipment Description 5
2.2 Device Capabilities 5
2.3 Test Configuration 5
2.4 EMI Suppression Device(s)/Modifications 5
3.0 DESCRIPTION OF TESTS 6
3.1 Evaluation Procedure 6
3.2 Radiated Power and Radiated Spurious Emissions 6
4.0 MEASUREMENT UNCERTAINTY 7
5.0 TEST EQUIPMENT CALIBRATION DATA 8
6.0 SAMPLE CALCULATIONS 9
7.0 TEST RESULTS 11
7.1 Summary 11
7.2 Occupied Bandwidth 12
7.3 Spurious and Harmonic Emissions at Antenna Terminal 26
7.4 Band Edge Emissions at Antenna Terminal 47
7.5 Radiated Power (ERP) 60
7.6 Radiated Spurious Emissions Measurements 64
7.7 Frequency Stability / Temperature Variation 76
8.0 CONCLUSION 81

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

PART 22 MEASUREMENT REPORT



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	ERP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
LTE Band 26/5	15MHz (Band 26 only)	QPSK	831.5 - 841.5	0.064	18.06	13M5G7D
		16QAM	831.5 - 841.5	0.052	17.18	13M5W7D
	10 MHz	QPSK	829.0 - 844.0	0.065	18.16	9M03G7D
		16QAM	829.0 - 844.0	0.051	17.06	8M99W7D
	5 MHz	QPSK	826.5 - 846.5	0.068	18.30	4M51G7D
		16QAM	826.5 - 846.5	0.053	17.28	4M50W7D
	3 MHz	QPSK	825.5 - 847.5	0.068	18.35	2M71G7D
		16QAM	825.5 - 847.5	0.053	17.22	2M70W7D
	1.4 MHz	QPSK	824.7 - 848.3	0.063	18.02	1M10G7D
		16QAM	824.7 - 848.3	0.051	17.04	1M10W7D

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	ERP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n5	20 MHz	π/2 BPSK	834.0 - 839.0	0.050	16.95	17M9G7D
		QPSK	834.0 - 839.0	0.056	17.50	18M0G7D
		16QAM	834.0 - 839.0	0.041	16.18	18M0W7D
	15 MHz	π/2 BPSK	831.5 - 841.5	0.051	17.04	13M5G7D
		QPSK	831.5 - 841.5	0.055	17.40	14M2G7D
		16QAM	831.5 - 841.5	0.043	16.33	14M2W7D
	10 MHz	π/2 BPSK	829.0 - 844.0	0.052	17.16	9M02G7D
		QPSK	829.0 - 844.0	0.059	17.67	9M34G7D
		16QAM	829.0 - 844.0	0.042	16.18	8M97W7D
	5 MHz	π/2 BPSK	826.5 - 846.5	0.050	17.00	4M51G7D
		QPSK	826.5 - 846.5	0.059	17.71	4M51G7D
		16QAM	826.5 - 846.5	0.040	15.98	4M50W7D

Mode	Modulation	Tx Frequency Range [MHz]	ERP		Emission Designator
			Max. Power [W]	Max. Power [dBm]	
GSM/GPRS	GMSK	824.2 - 848.8	0.385	25.85	246KGXW
EDGE	8-PSK	824.2 - 848.8	0.109	20.36	241KG7W
WCDMA	Spread Spectrum	826.4 - 846.6	0.074	18.67	4M17F9W

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.

- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).

- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMA528B**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 22.

Test Device Serial No.: 0792M, 0715M, 1854M, 1846M, 0740M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900, WCDMA/HSPA, Multi-band LTE, 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE), NFC

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

© 2021 PCTEST V2.0 3/15/2021

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI/TIA-603-E-2016) and "Measurement Guidance for Certification of Licensed Digital Transmitters" (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure……..None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI/TIA-603-E-2016. A half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_{d\ [dBm]} = P_{g\ [dBm]} - \text{cable loss}_{\ [dB]} + \text{antenna gain}_{\ [dBd/dBi]};$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_{g\ [dBm]}$ – cable loss $_{[dB]}$.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$

And

$$EIRP_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8;$$ where D is the measurement distance in meters.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

© 2021 PCTEST V2.0 3/15/2021

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of k = 2 to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (±dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2	EMC Cable and Switch System	3/4/2021	Annual	3/4/2022	AP2
-	AP1	EMC Cable and Switch System	3/9/2021	Annual	3/9/2022	AP1
-	LTx2	Licensed Transmitter Cable Set	3/12/2021	Annual	3/12/2022	LTx2
-	LTx3	LIcensed Transmitter Cable Set	2/26/2021	Annual	2/26/2022	LTx3
Agilent	E5515C	Wireless Communications Test Set	N/A			GB46310798
Agilent	N9030A	50GHz PXA Signal Analyzer	1/20/2021	Annual	1/20/2022	US51350301
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6201381794
Com-Power	AL-130R	Active Loop Antenna	8/22/2019	Biennial	8/22/2021	121085
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	8/7/2018	Triennial	8/7/2021	9203-2178
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/12/2020	Biennial	3/12/2022	128337
Keysight Technologies	N9020A	MXA Signal Analyzer	9/22/2020	Annual	9/22/2021	MY54500644
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	8/17/2020	Annual	8/17/2021	MY52350166
Keysight Technologies	N9030A	PXA Signal Analyzer	10/16/2020	Annual	10/16/2021	MY54490576
Keysight Technologies	N9030B	PXA Signal Analyzer, Multi-touch	9/17/2020	Annual	9/17/2021	MY57141001
Keysight Technologies	N9038A	MXE EMI Receiver	8/11/2020	Annual	8/11/2021	MY51210133
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11403100002
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			100976
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	7/15/2020	Annual	7/15/2021	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/9/2020	Annual	9/9/2021	100348
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	1/21/2021	Annual	1/21/2022	101716
Rohde & Schwarz	FSW26	2Hz-26.5GHz Signal and Spectrum Analyzer	2/10/2021	Annual	2/10/2022	103187
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/10/2020	Annual	8/10/2021	103200
Sunol	JB6	LB6 Antenna	11/13/2020	Biennial	11/13/2022	A082816

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

6.0 SAMPLE CALCULATIONS

GSM Emission Designator

Emission Designator = 250KGXW
GSM BW = 250 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 250KG7W
EDGE BW = 250 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W
WCDMA BW = 4.16 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 8M62G7D
LTE BW = 8.62 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D
LTE BW = 8.45 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission, telemetry, telecommand

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm – (-24.80) = 50.3 dBc.

© 2021 PCTEST V2.0 3/15/2021

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.

FCC ID: A3LSMA528B

FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)

Mode(s): GSM/GPRS/EDGE/WCDMA/LTE/NR

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Transmitter Conducted Output Power	2.1046	RSS-132(5.4)	N/A	PASS	See RF Exposure Report
	Occupied Bandwidth	2.1049	RSS-Gen(6.7)	N/A	PASS	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 22.917(a)	RSS-132(5.5)	> 43 + 10log10(P[Watts]) at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Frequency Stability	2.1055, 22.355	RSS-132(5.3)	Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
RADIATED	Effective Radiated Power / Equivalent Isotropic Radiated Power	22.913(a)(5)	RSS-132(5.4)	< 7 Watts max. ERP	PASS	Section 7.6
	Radiated Spurious Emissions	2.1053, 22.917(a)	RSS-132(5.5)	> 43 + 10 log10 (P[Watts]) for all out-of-band emissions	PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST EMC Software Tool Beta 8.

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW ≥ 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

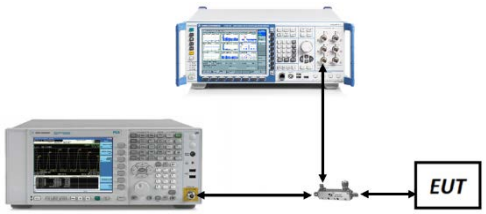

Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None.

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

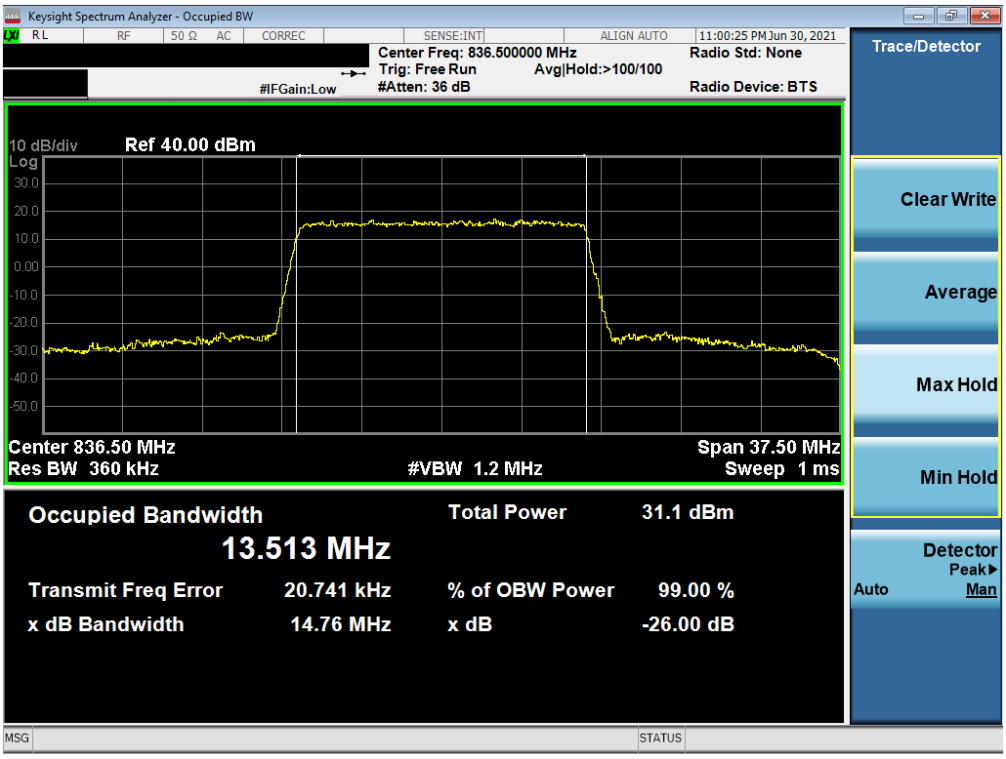

Plot 7-1. Occupied Bandwidth Plot (LTE Band 26 - 15MHz QPSK - Full RB)

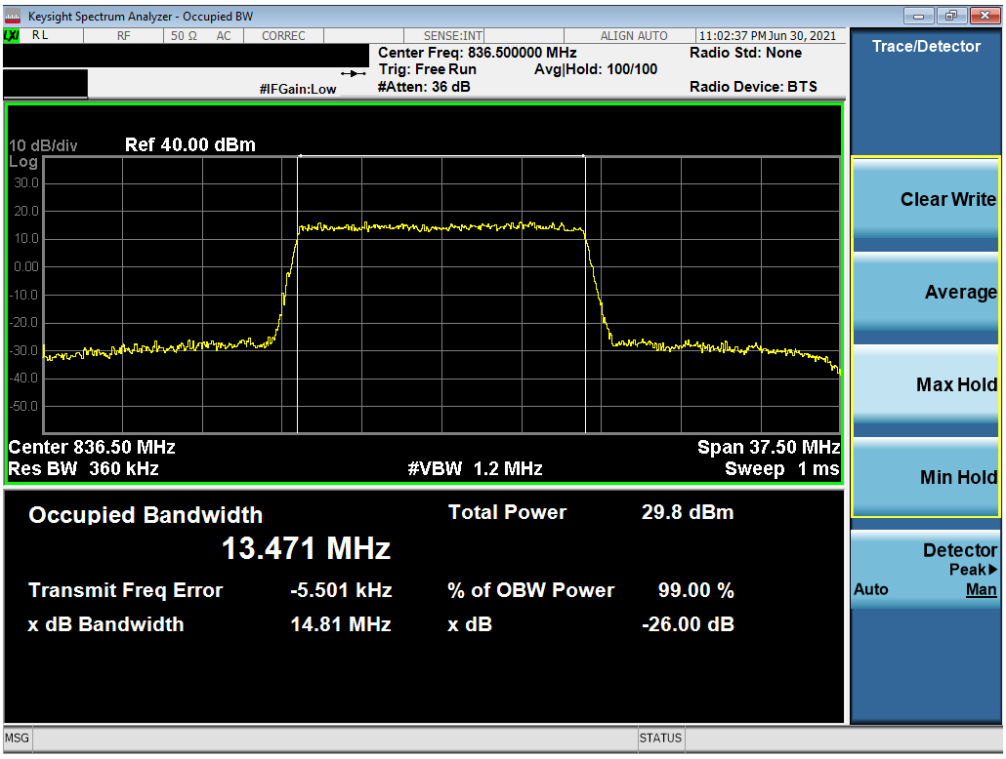

Plot 7-2. Occupied Bandwidth Plot (LTE Band 26 - 15MHz 16-QAM - Full RB)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

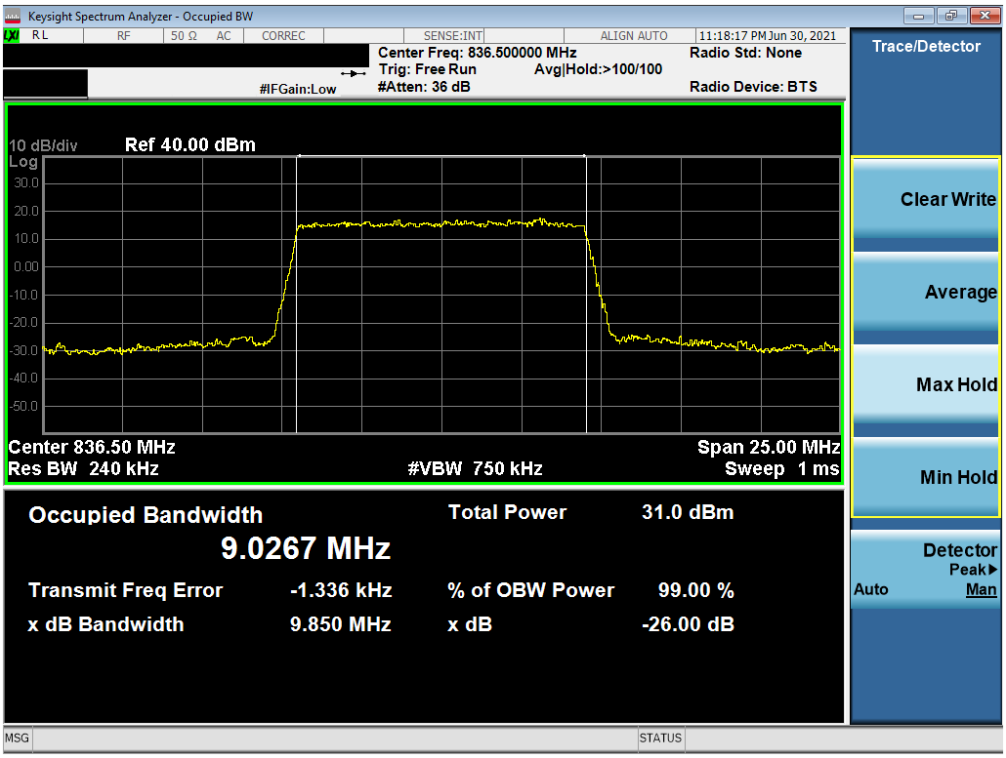

Plot 7-3. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz QPSK - Full RB)

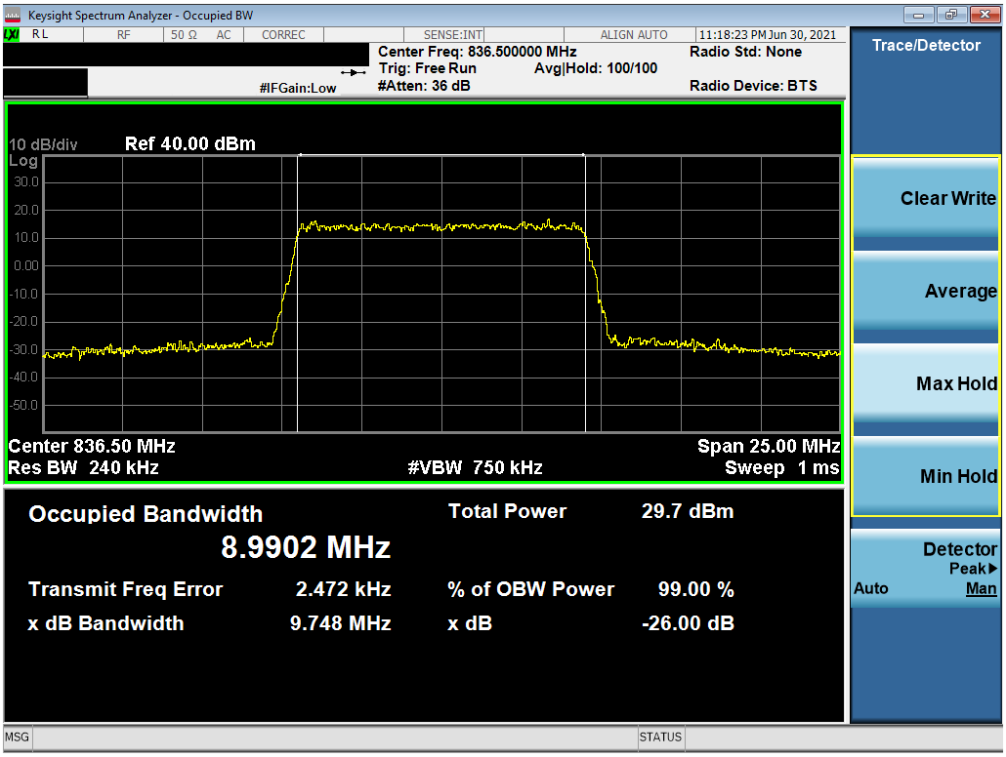

Plot 7-4. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz 16-QAM - Full RB)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

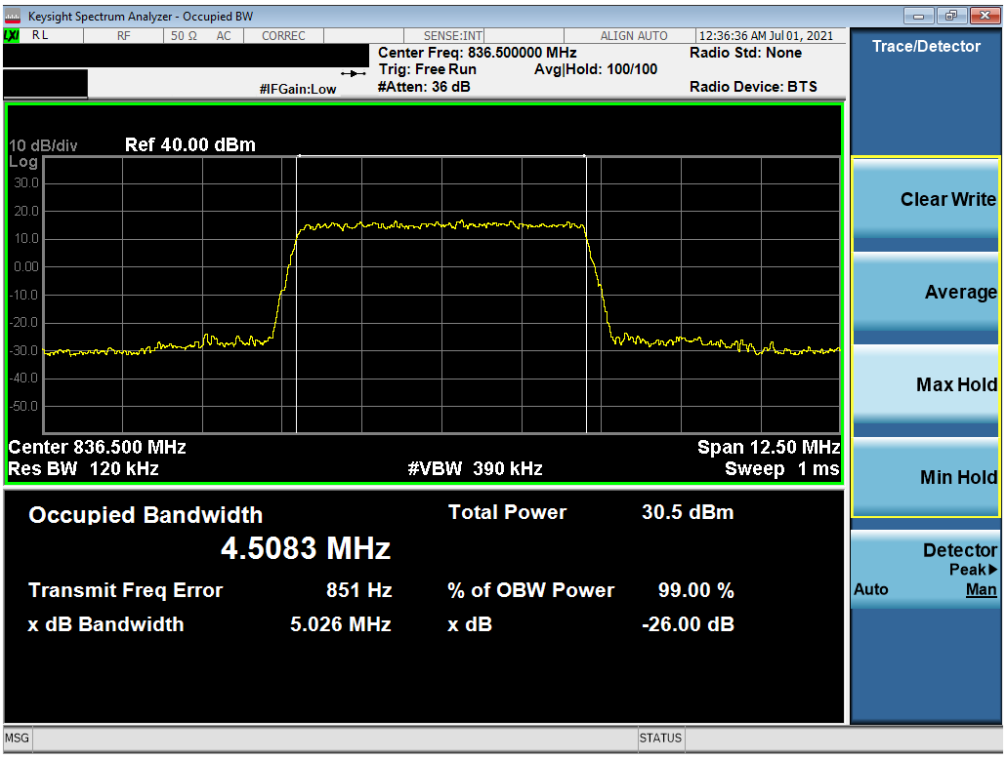

Plot 7-5. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz QPSK - Full RB)

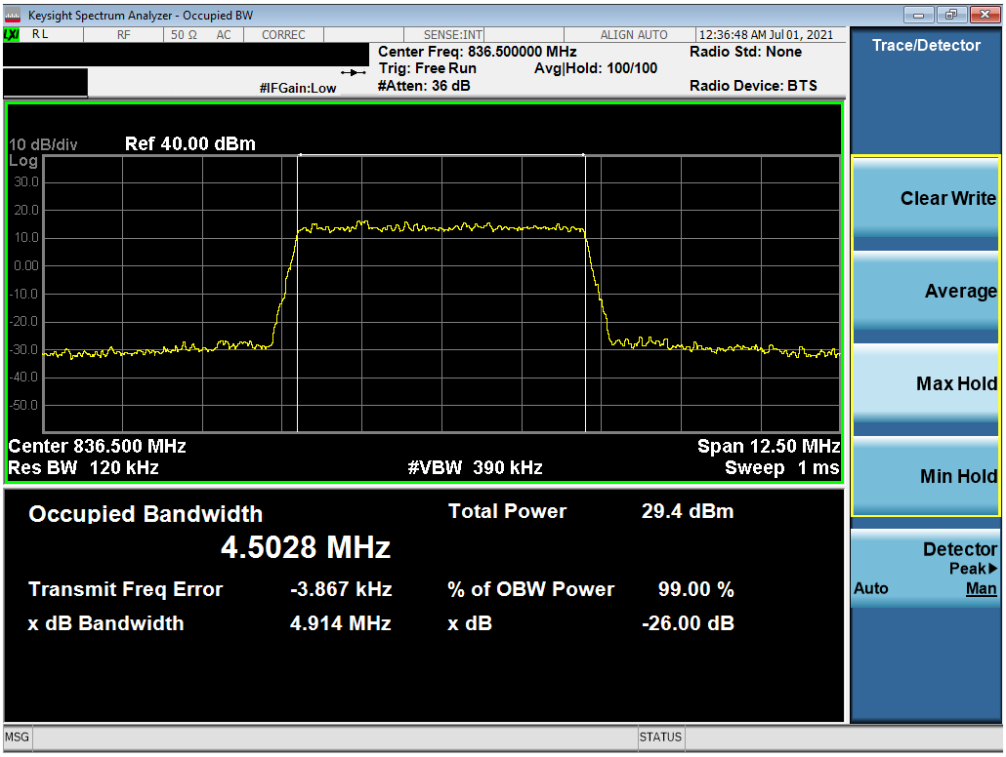

Plot 7-6. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz 16-QAM - Full RB)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

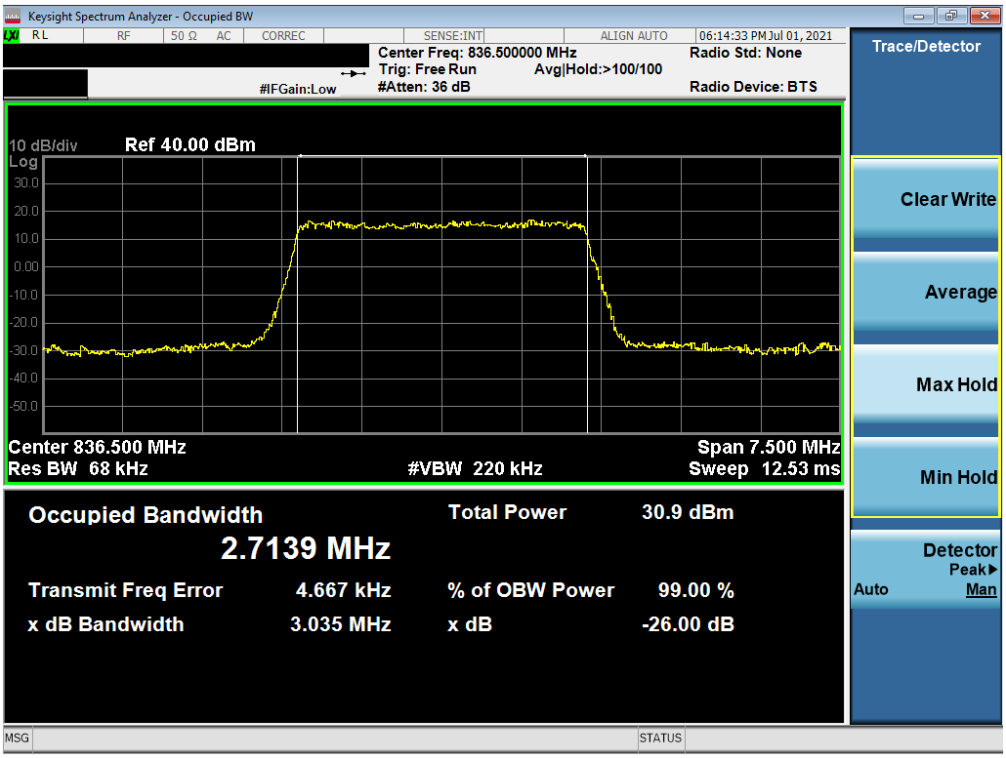

Plot 7-7. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz QPSK - Full RB)

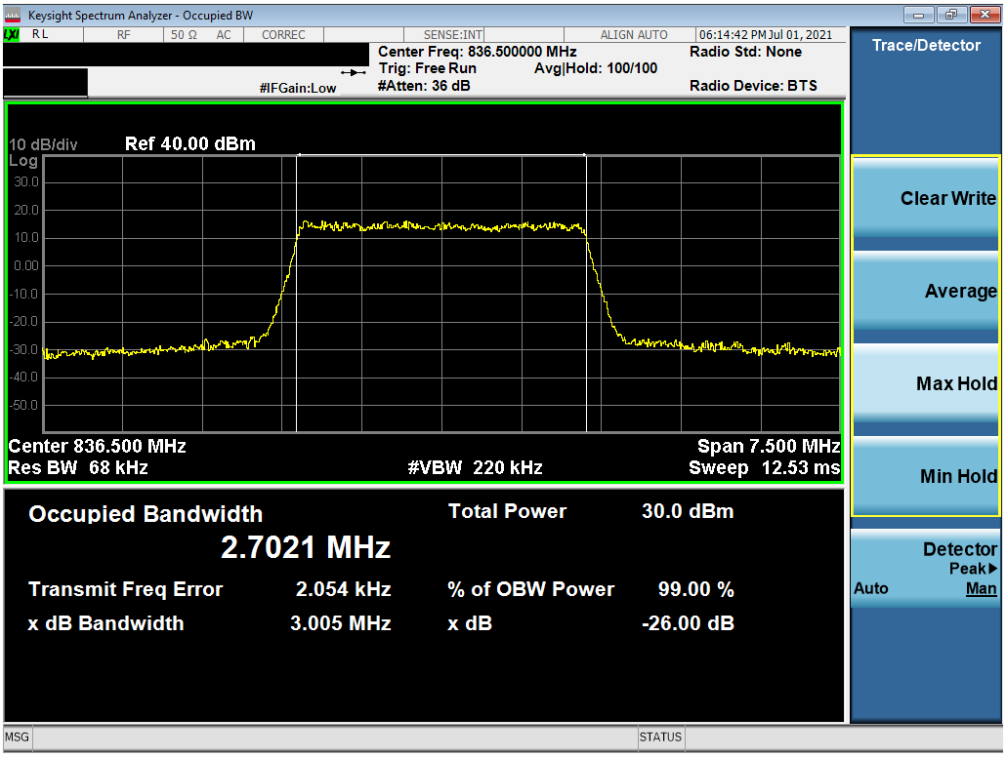

Plot 7-8. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz 16-QAM - Full RB)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

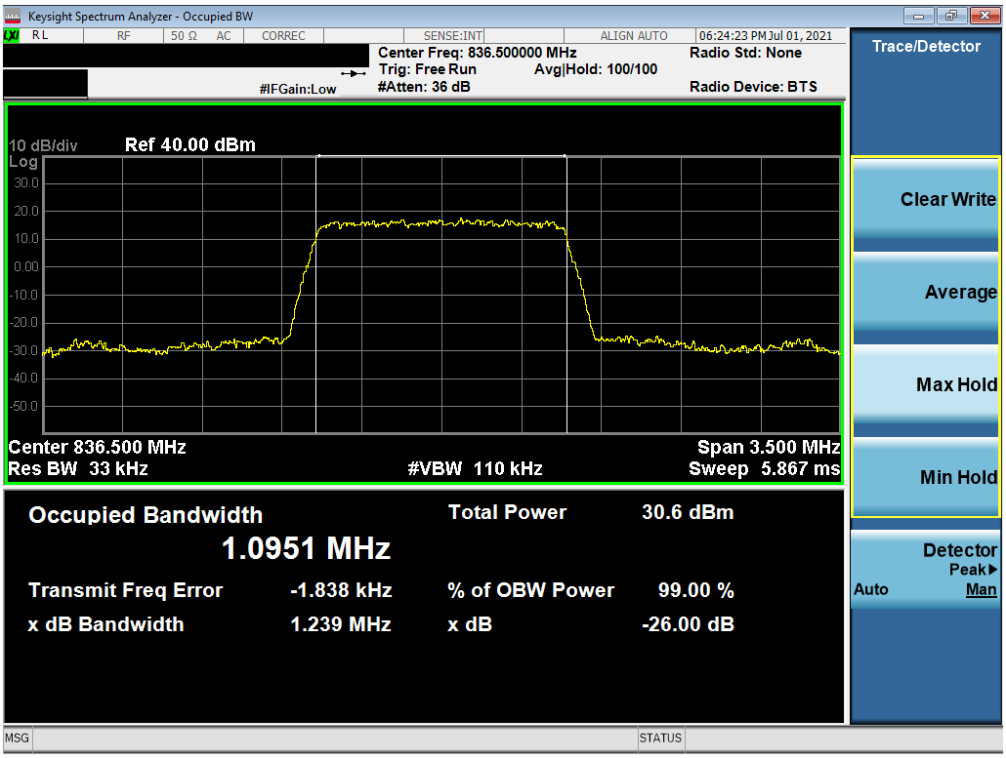

Plot 7-9. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz QPSK - Full RB)

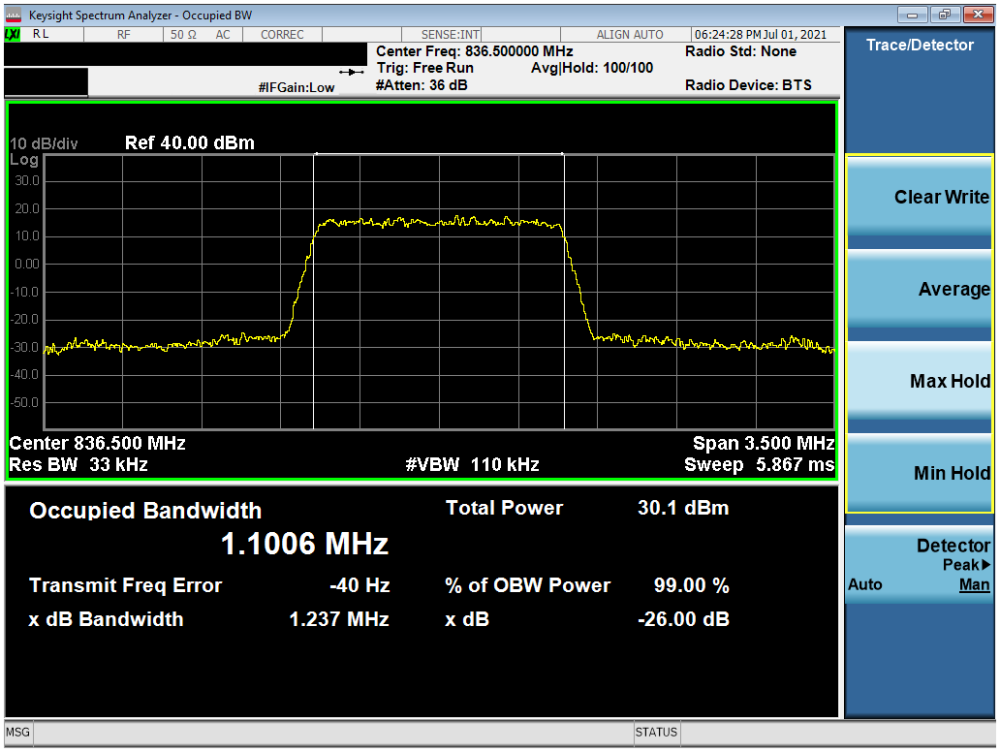

Plot 7-10. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz 16-QAM - Full RB)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

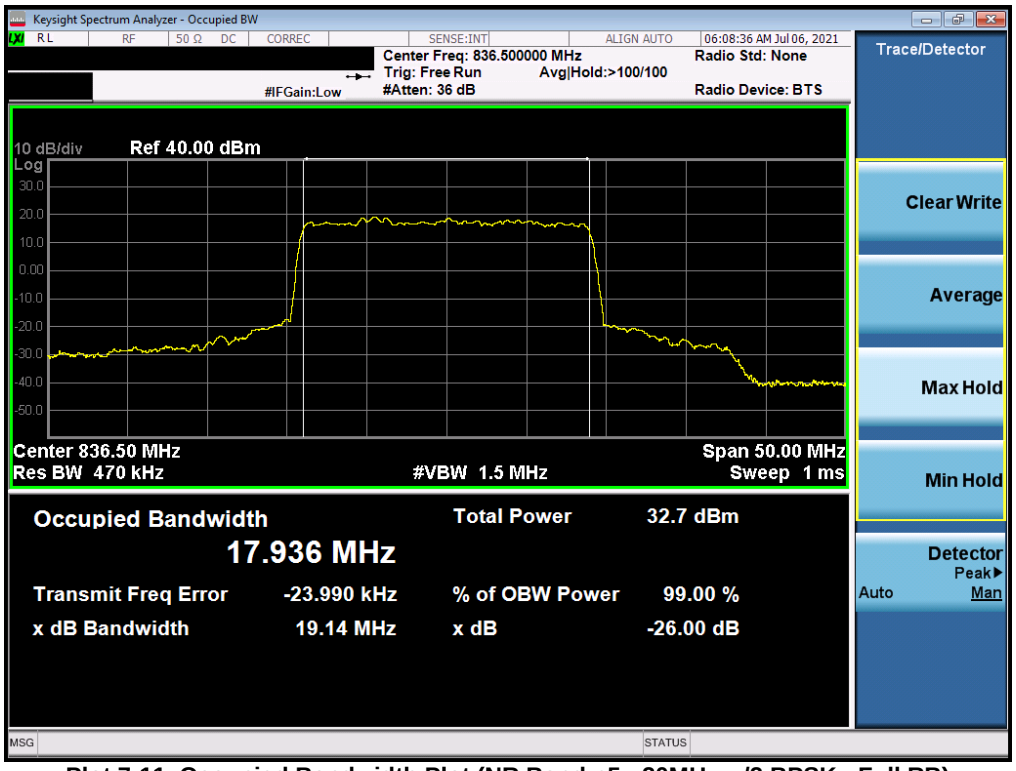

Plot 7-11. Occupied Bandwidth Plot (NR Band n5 - 20MHz π/2 BPSK - Full RB)

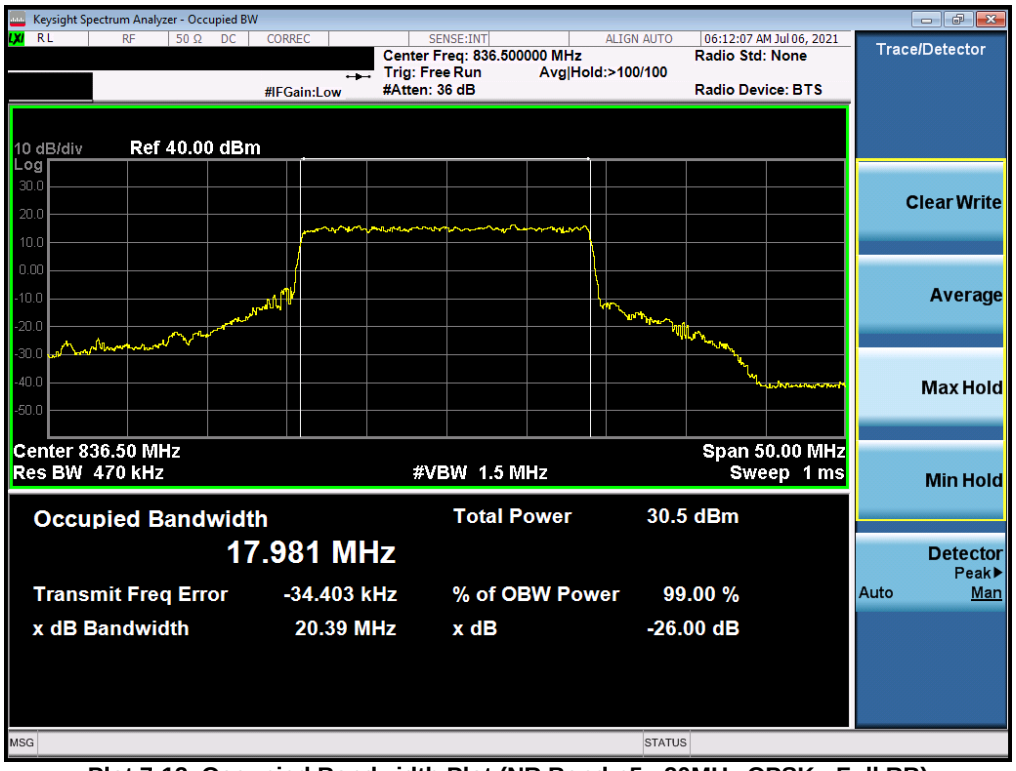

Plot 7-12. Occupied Bandwidth Plot (NR Band n5 - 20MHz QPSK - Full RB)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

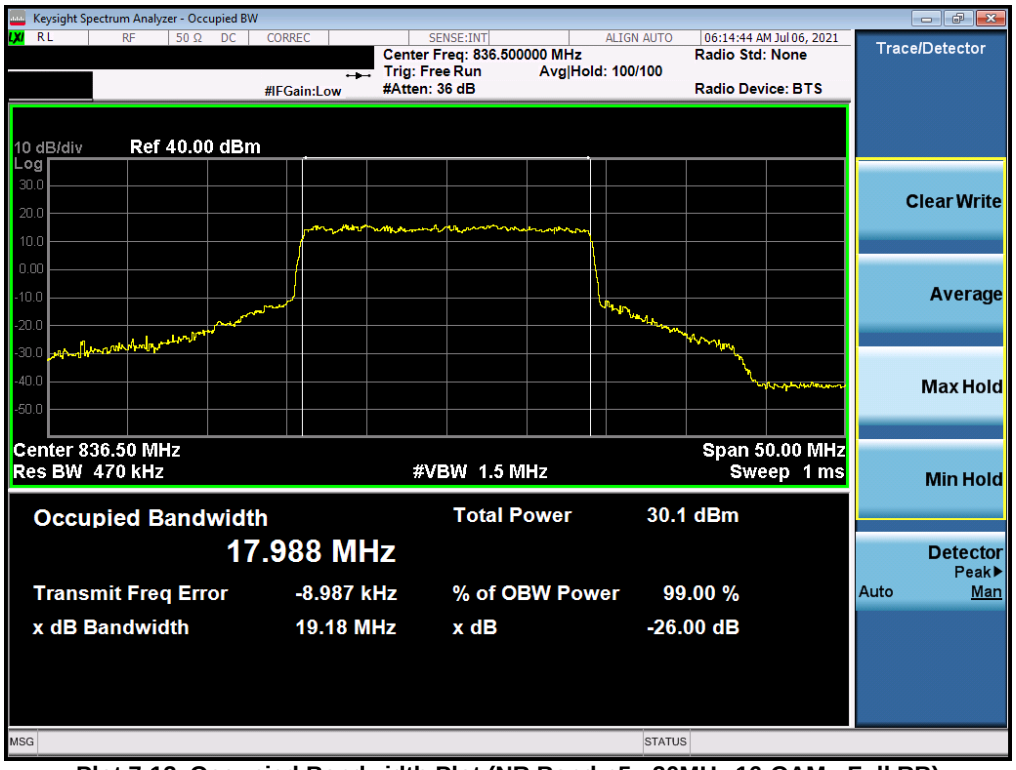

Plot 7-13. Occupied Bandwidth Plot (NR Band n5 - 20MHz 16-QAM - Full RB)

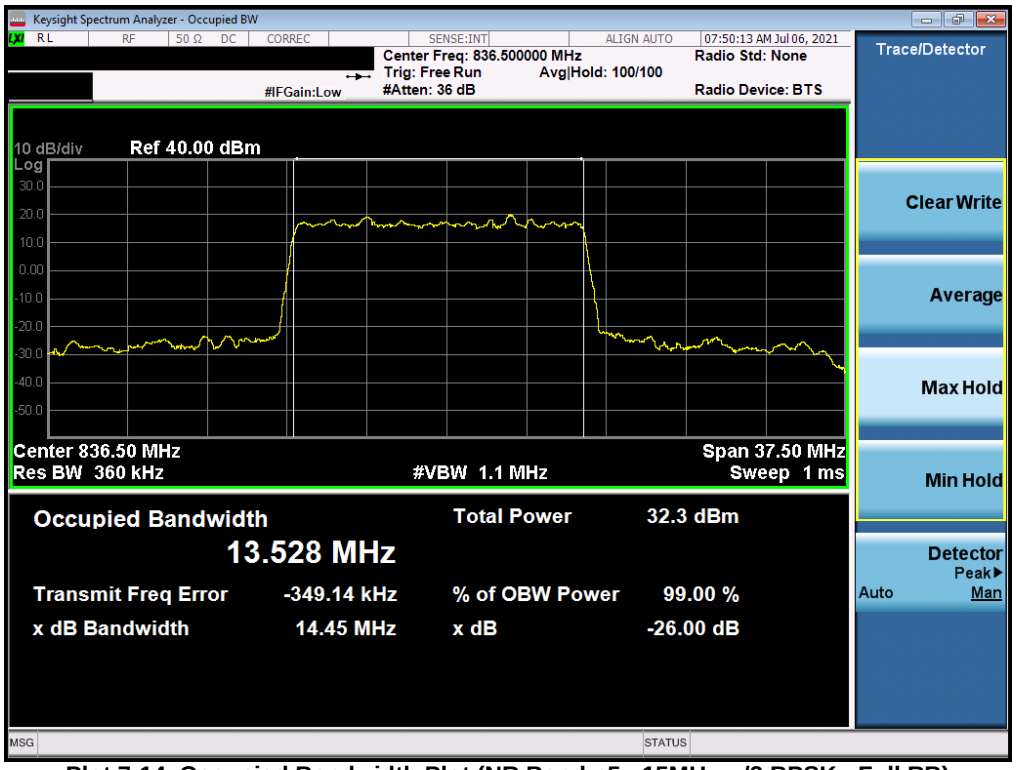

Plot 7-14. Occupied Bandwidth Plot (NR Band n5 - 15MHz π/2 BPSK - Full RB)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

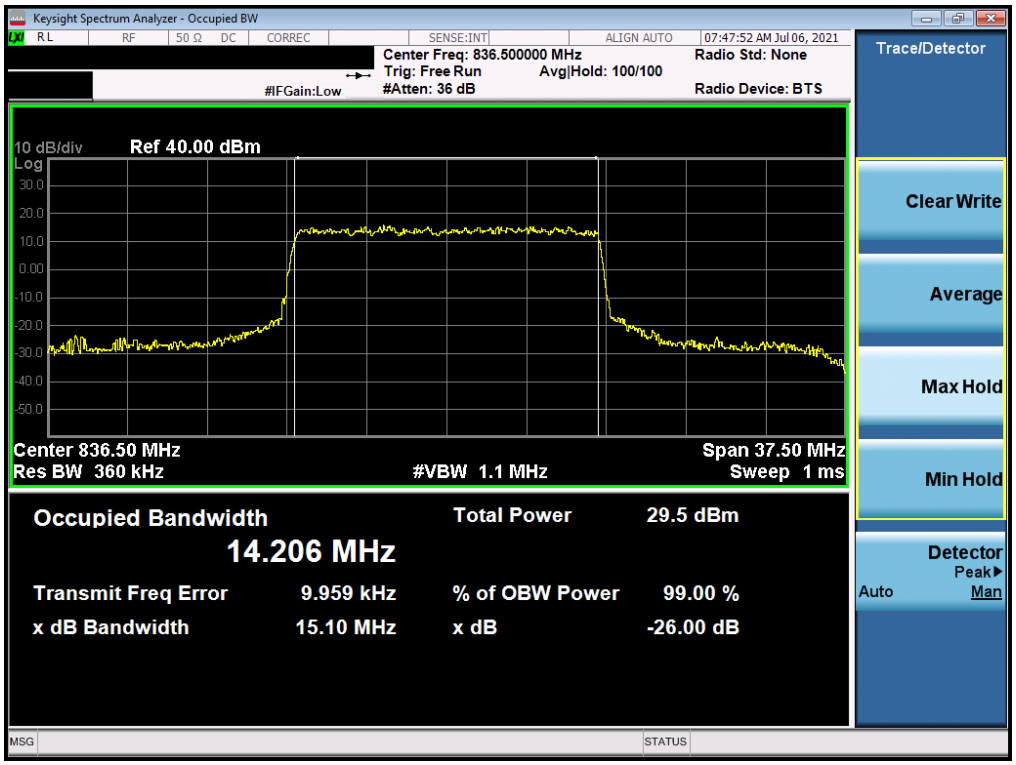

Plot 7-15. Occupied Bandwidth Plot (NR Band n5 - 15MHz QPSK - Full RB)

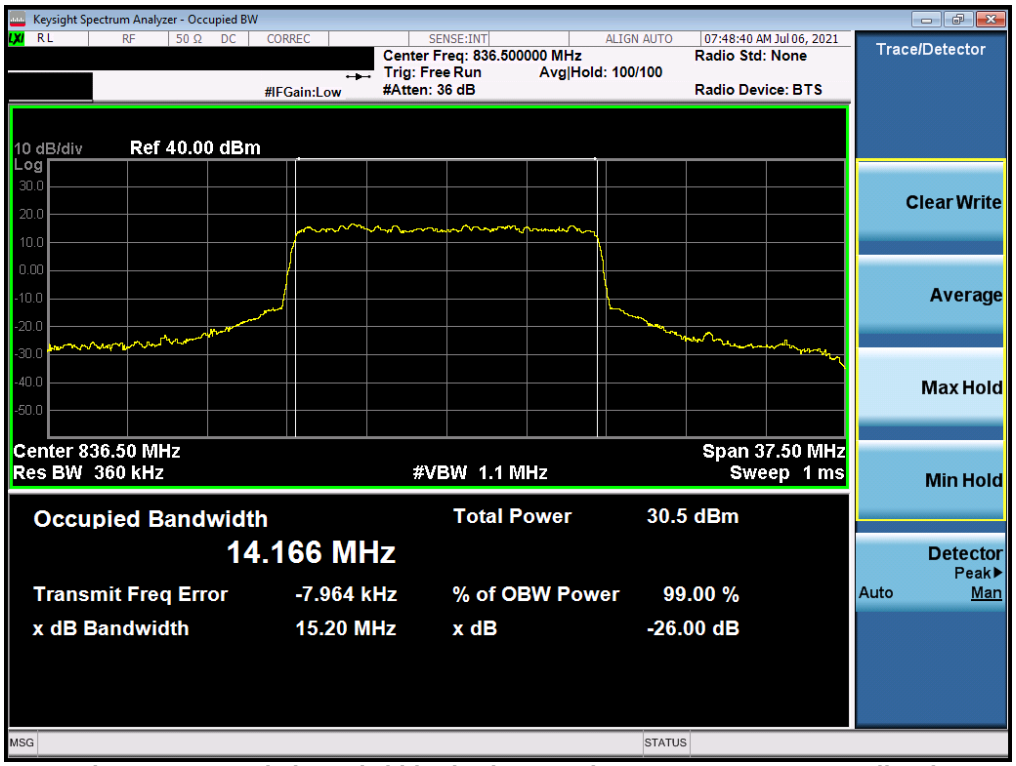

Plot 7-16. Occupied Bandwidth Plot (NR Band n5 - 15MHz 16-QAM - Full RB)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

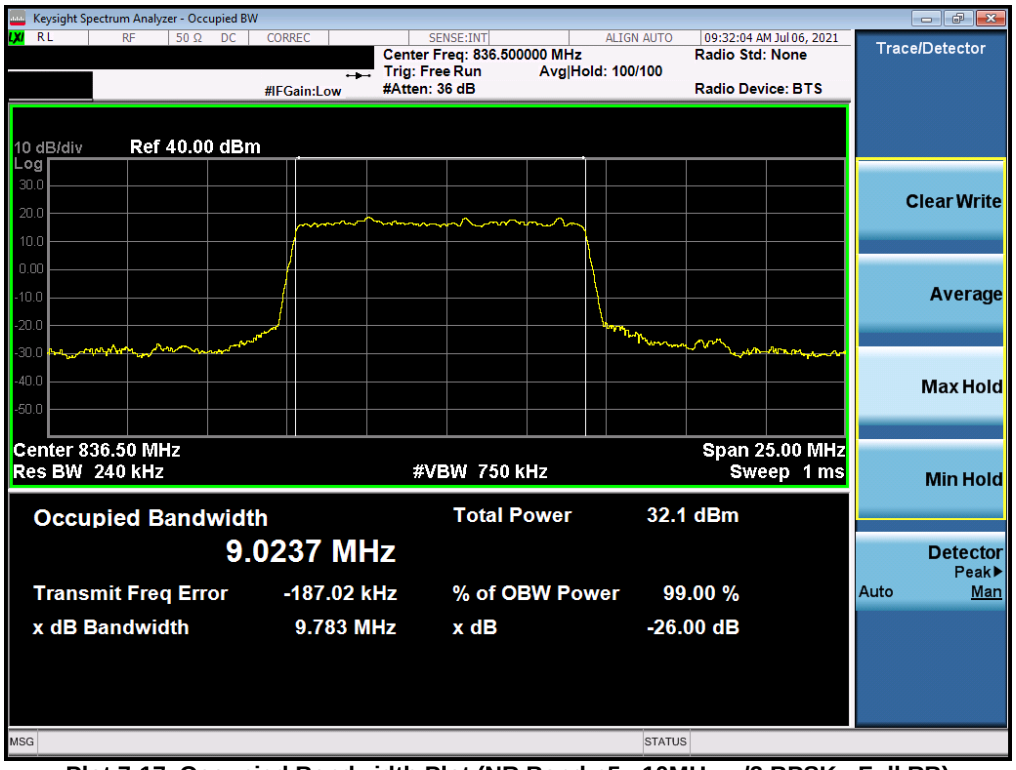

Plot 7-17. Occupied Bandwidth Plot (NR Band n5 - 10MHz π/2 BPSK - Full RB)

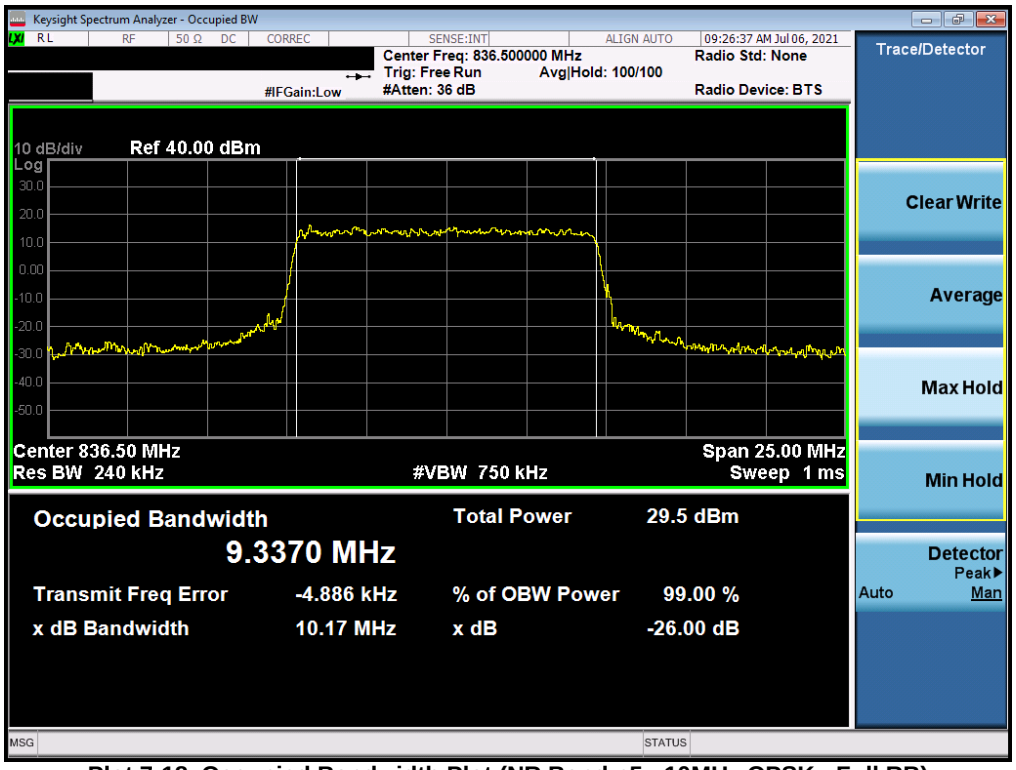

Plot 7-18. Occupied Bandwidth Plot (NR Band n5 - 10MHz QPSK - Full RB)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

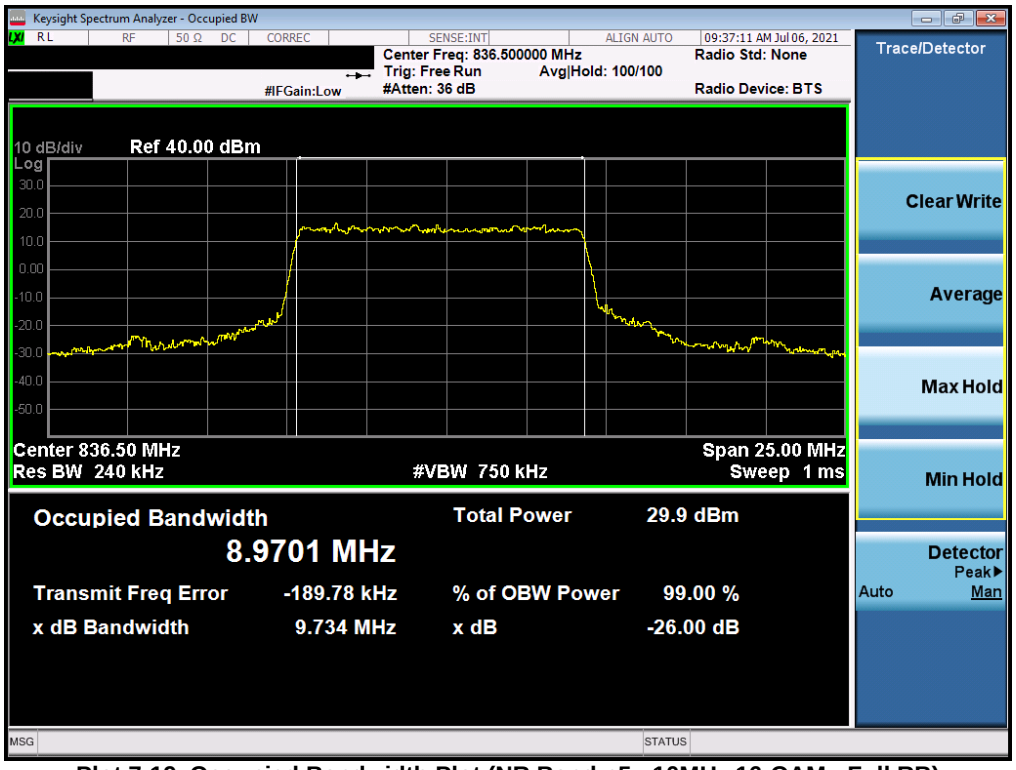

Plot 7-19. Occupied Bandwidth Plot (NR Band n5 - 10MHz 16-QAM - Full RB)

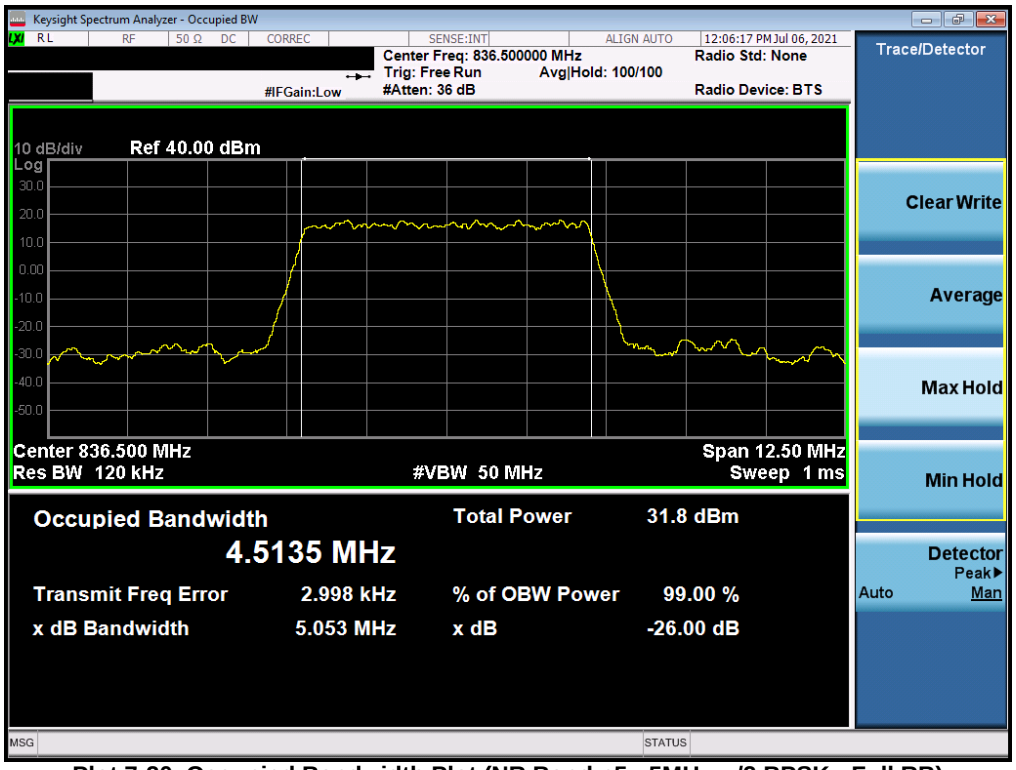

Plot 7-20. Occupied Bandwidth Plot (NR Band n5 - 5MHz π/2 BPSK - Full RB)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

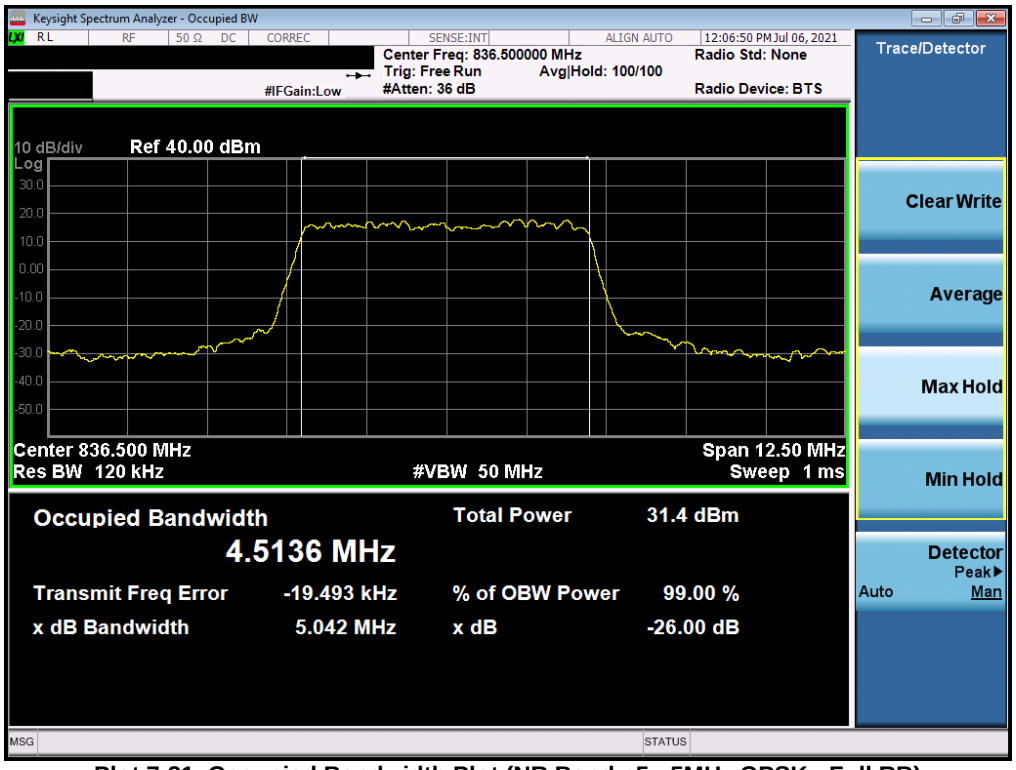

Plot 7-21. Occupied Bandwidth Plot (NR Band n5 - 5MHz QPSK - Full RB)

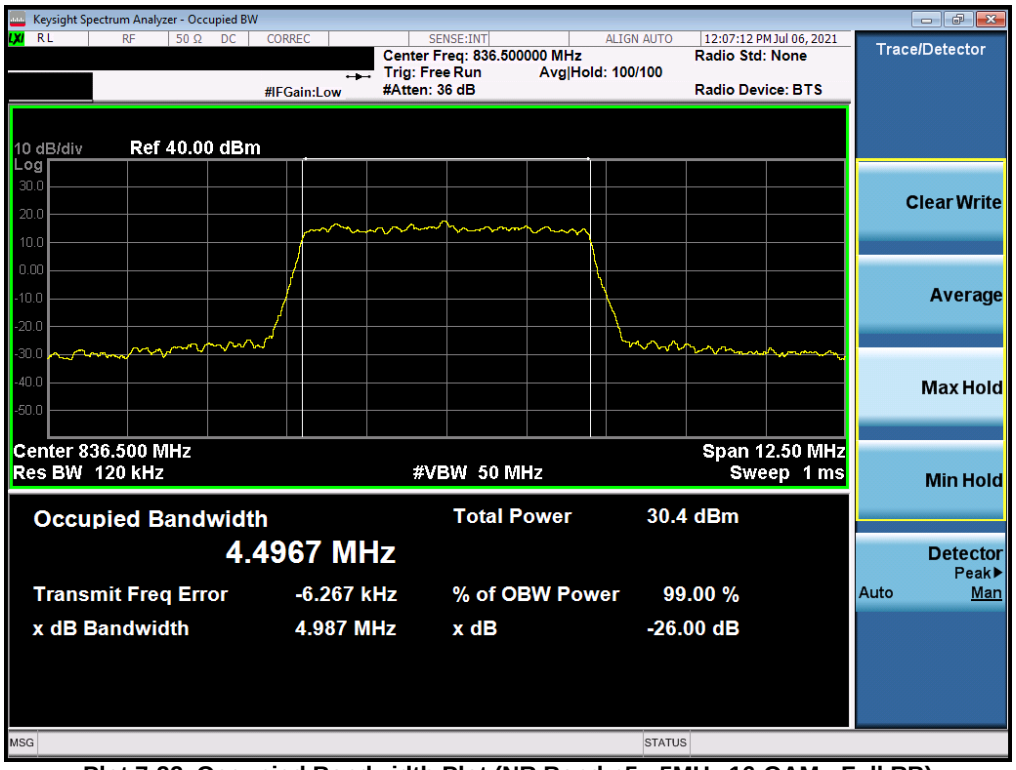

Plot 7-22. Occupied Bandwidth Plot (NR Band n5 - 5MHz 16-QAM - Full RB)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Plot 7-23. Occupied Bandwidth Plot (GPRS, Ch. 190)

Plot 7-24. Occupied Bandwidth Plot (EDGE, Ch. 190)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

WCDMA Cell

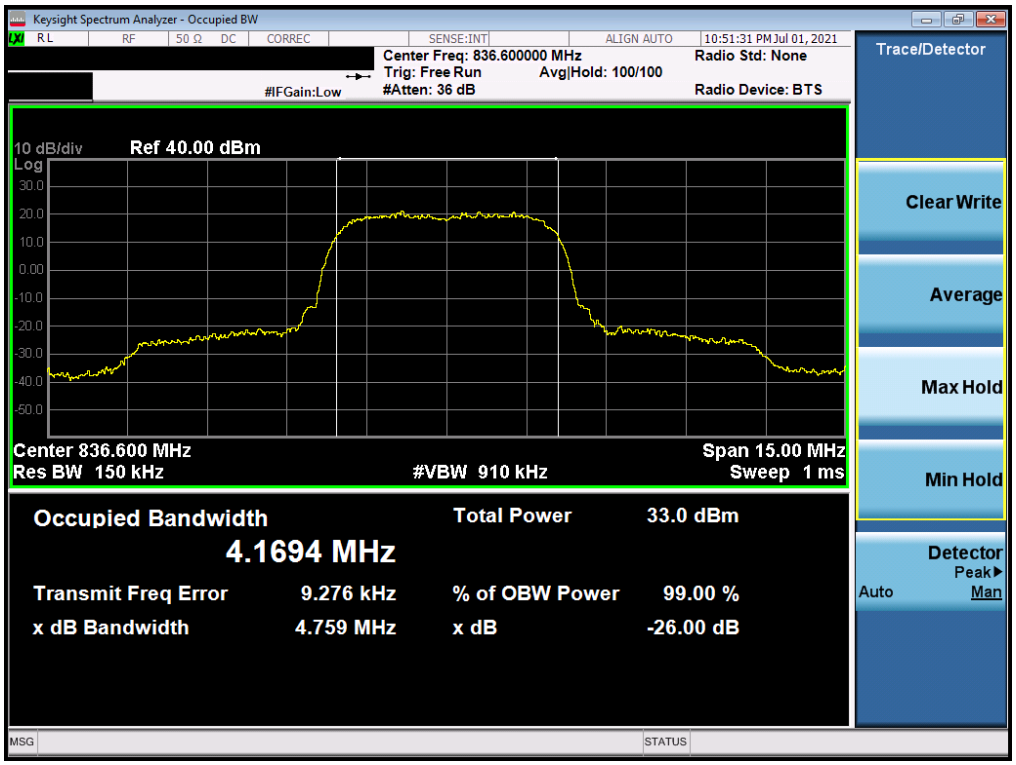

Plot 7-25. Occupied Bandwidth Plot (WCDMA, Ch. 4183)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is 43 + 10 $log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

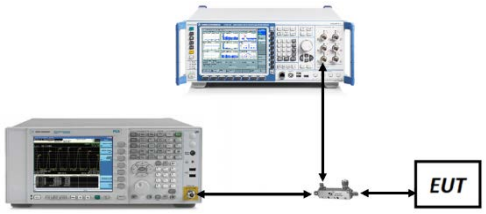

Figure 7-2. Test Instrument & Measurement Setup

Test Notes

1. Per Part 22 and RSS-132, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

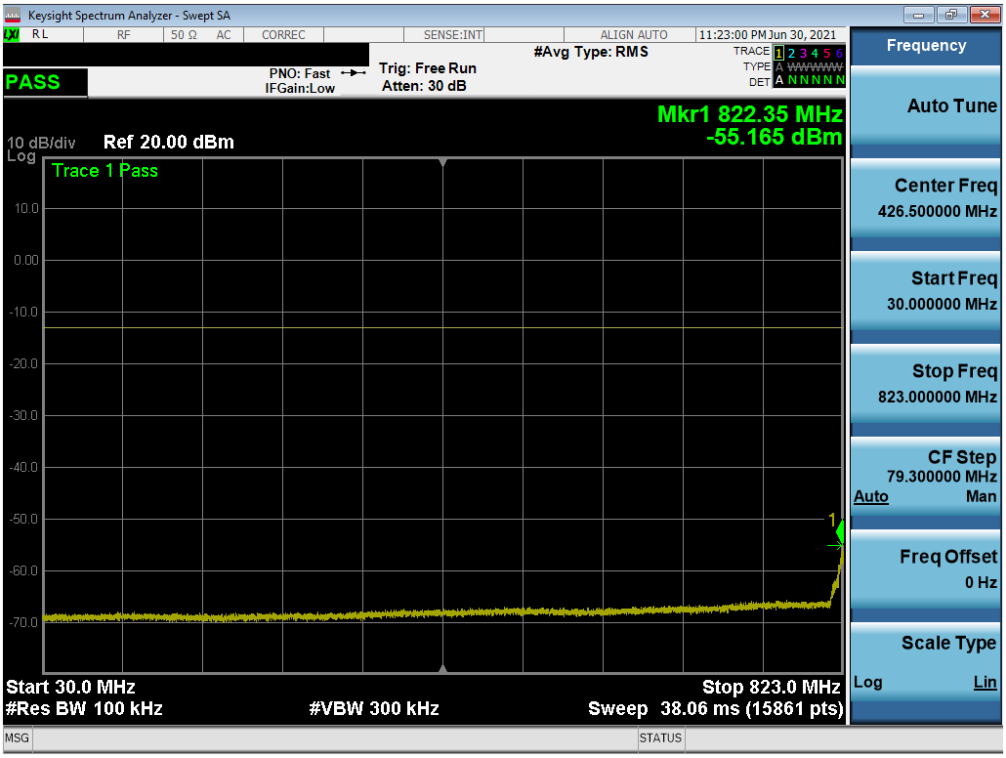

Plot 7-26. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK – 1 RB - Low Channel)

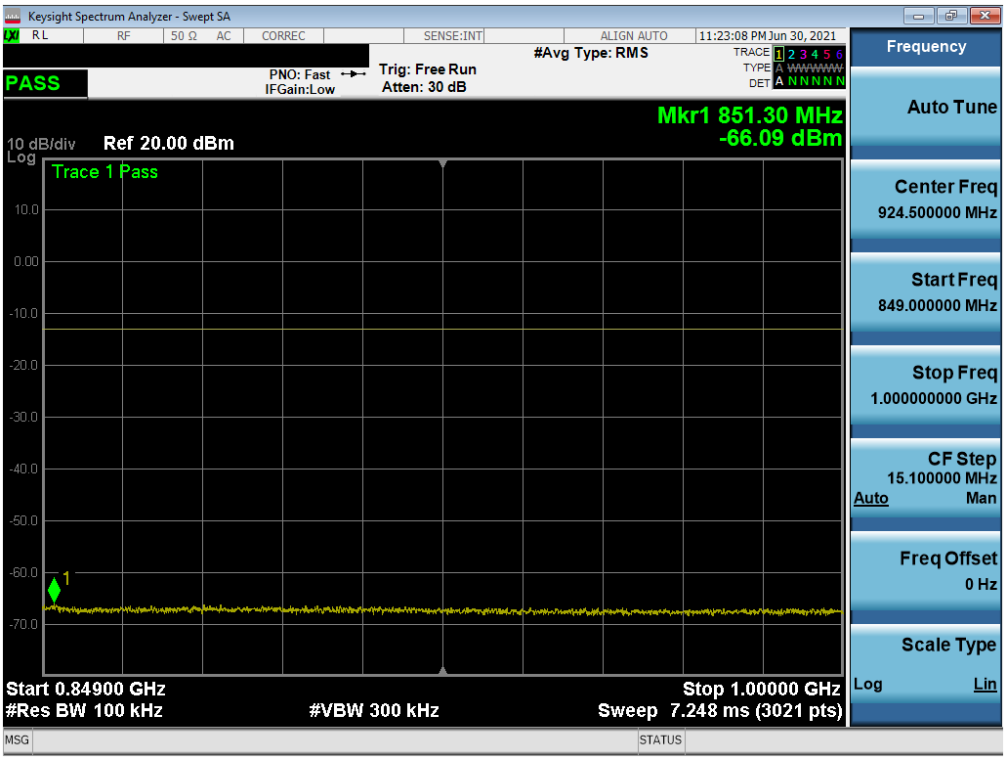

Plot 7-27. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - Low Channel)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

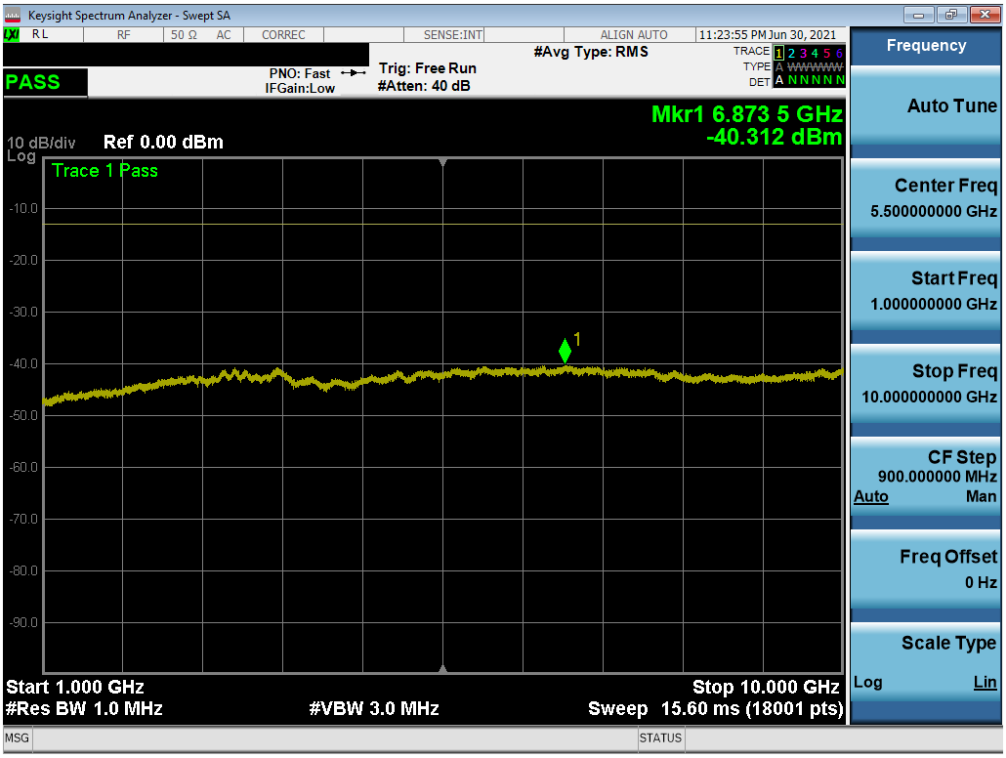

Plot 7-28. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - Low Channel)

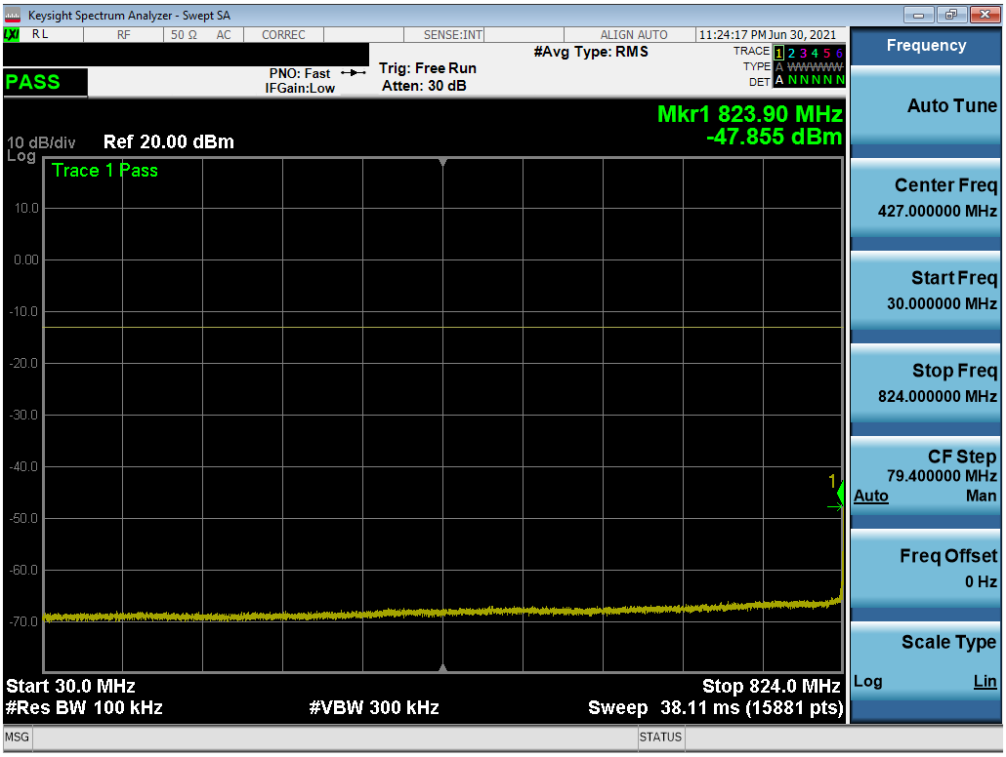

Plot 7-29. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - Mid Channel)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

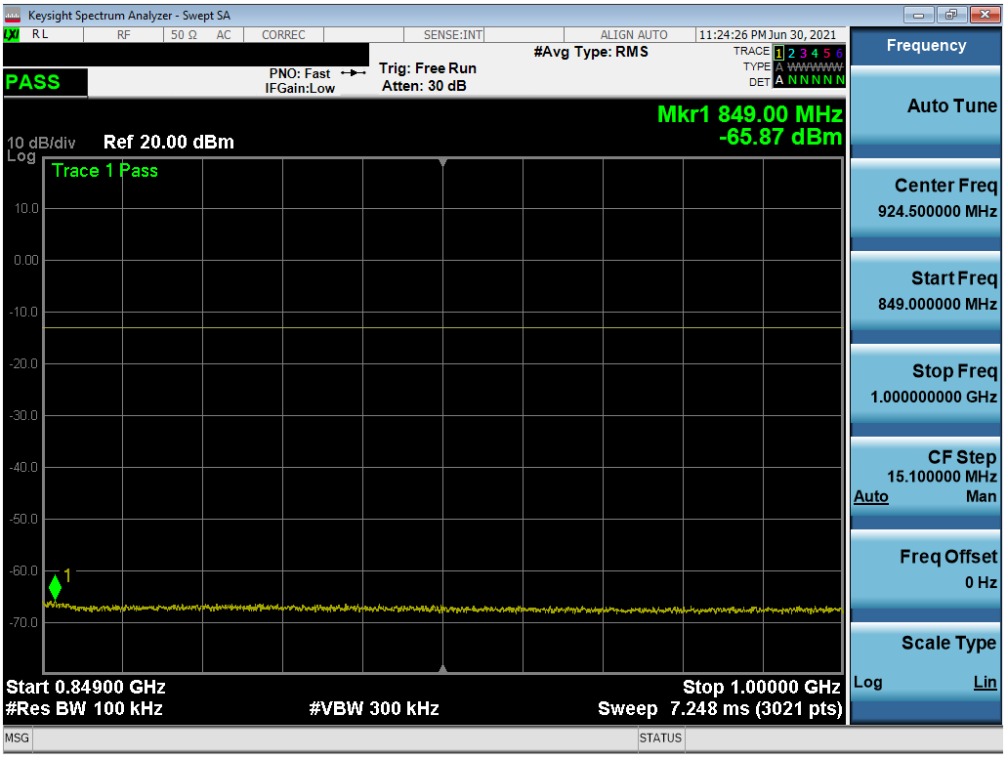

Plot 7-30. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - Mid Channel)

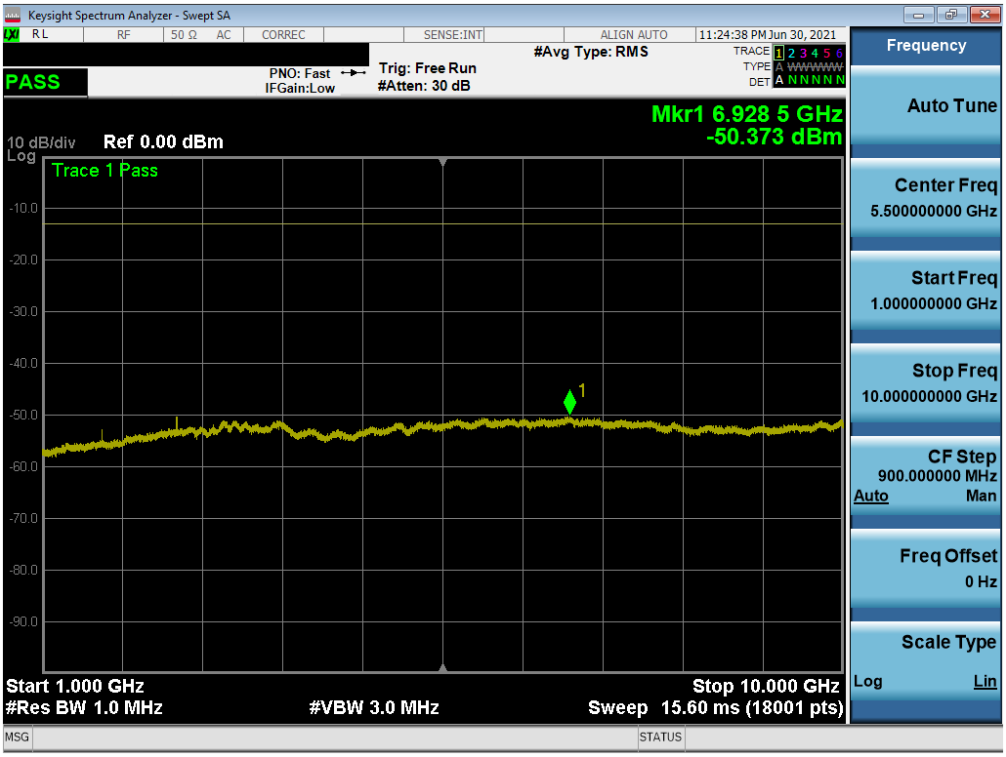

Plot 7-31. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - Mid Channel)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

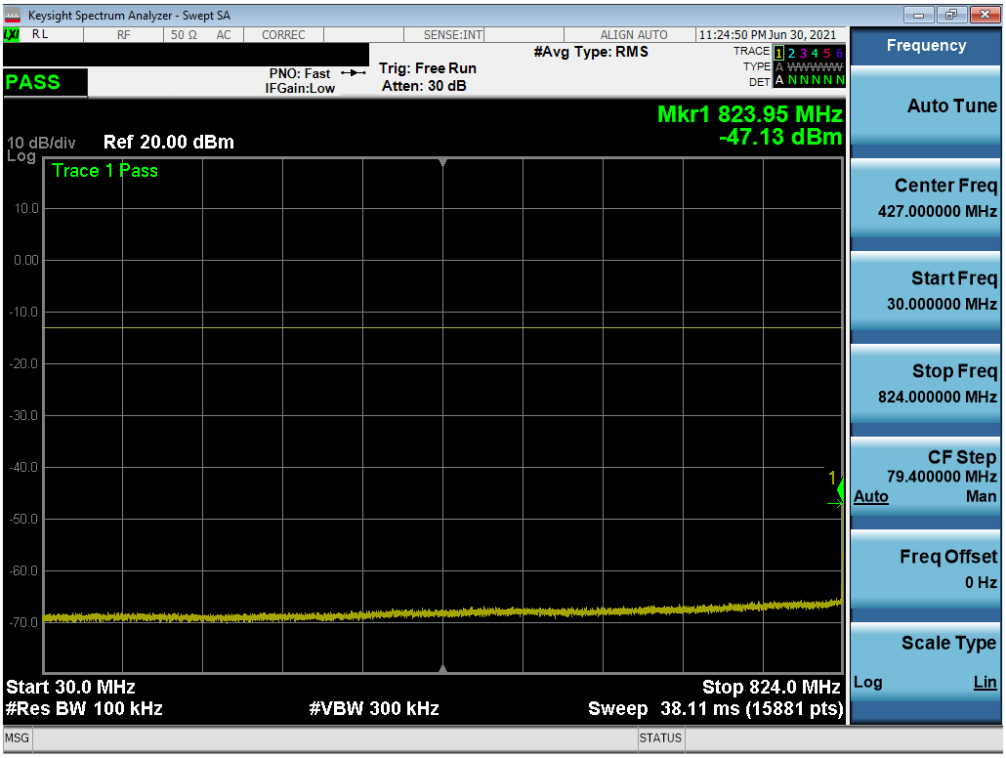

Plot 7-32. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - High Channel)

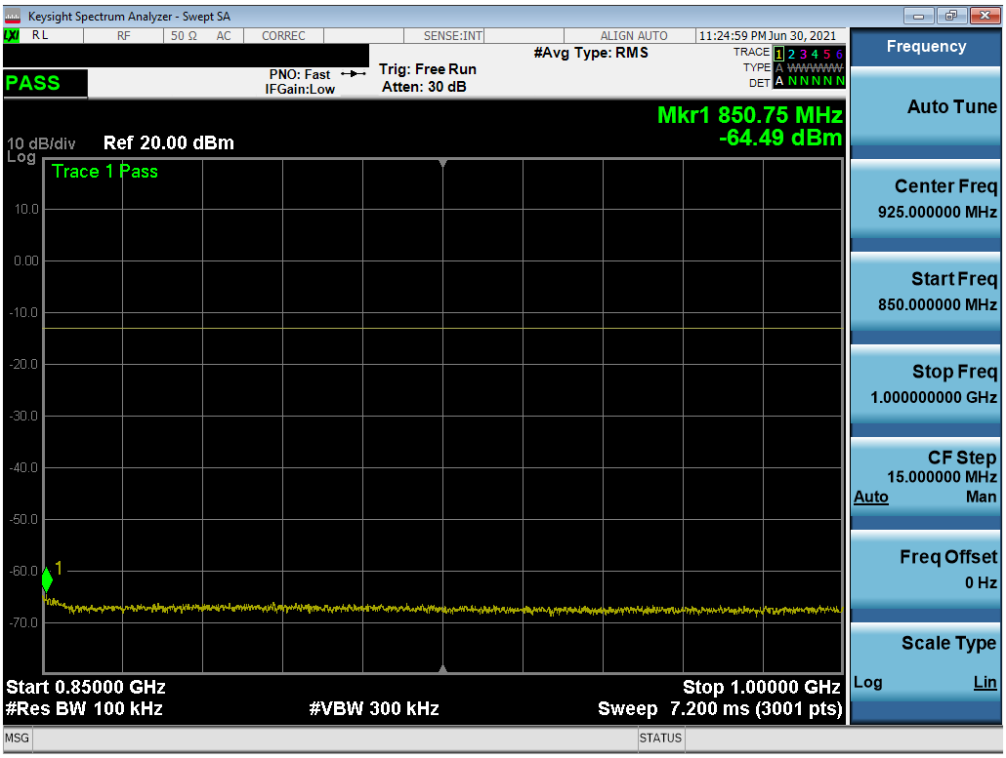

Plot 7-33. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - High Channel)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

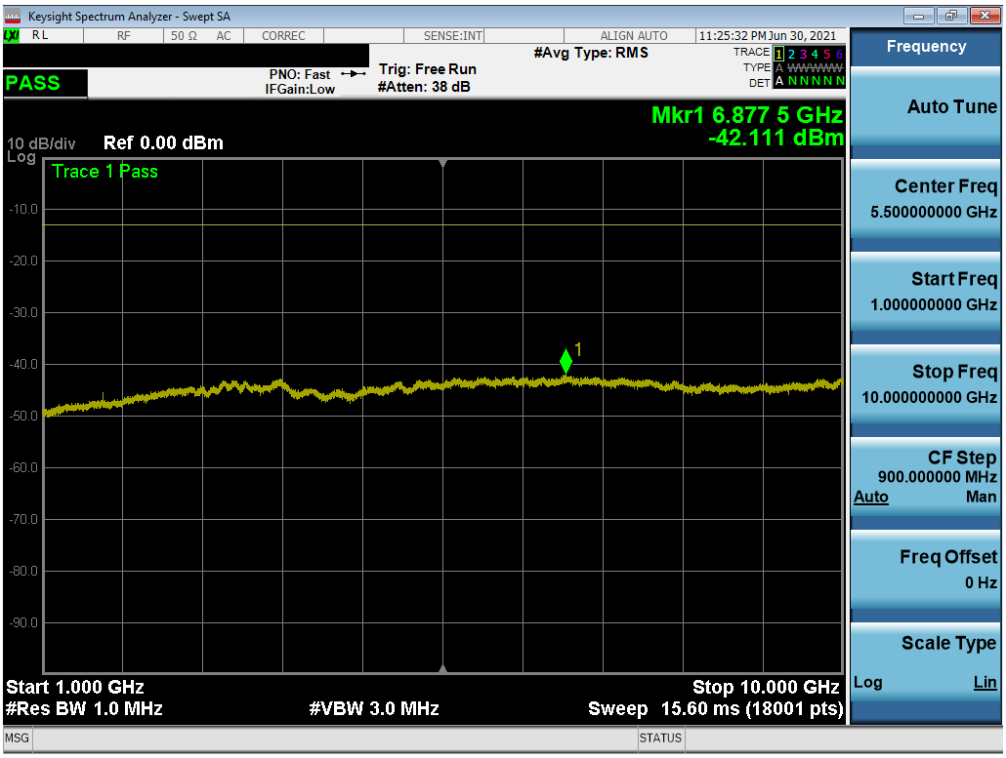

Plot 7-34. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - High Channel)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

NR Band n5

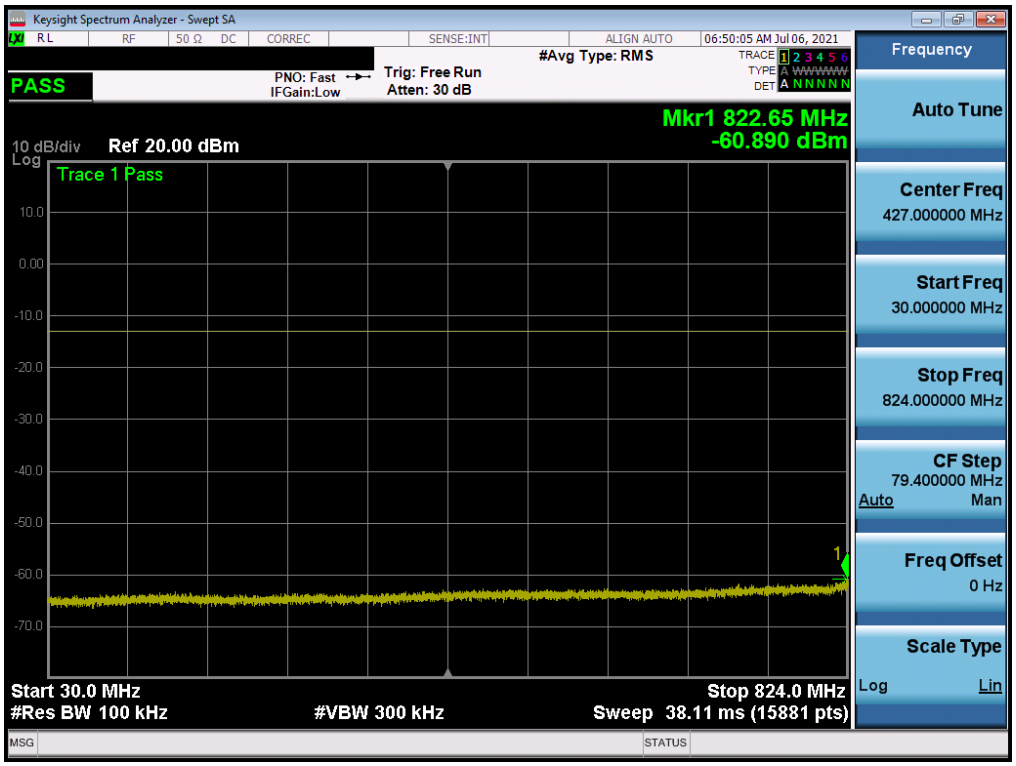

Plot 7-35. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - Low Channel)

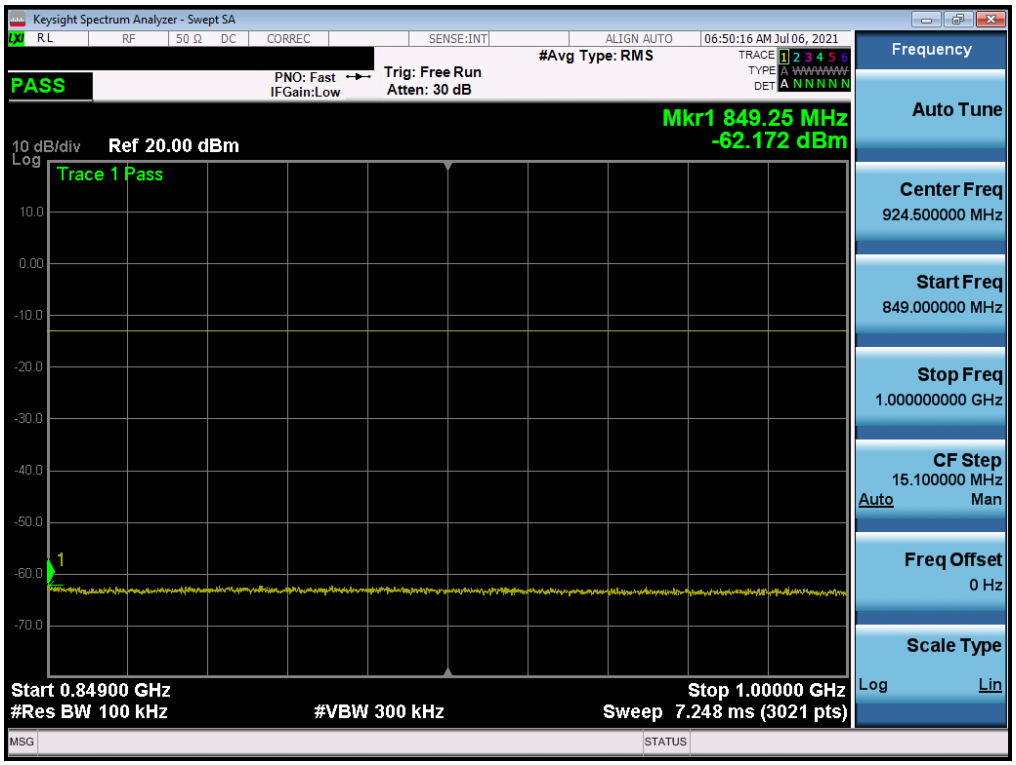

Plot 7-36. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - Low Channel)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

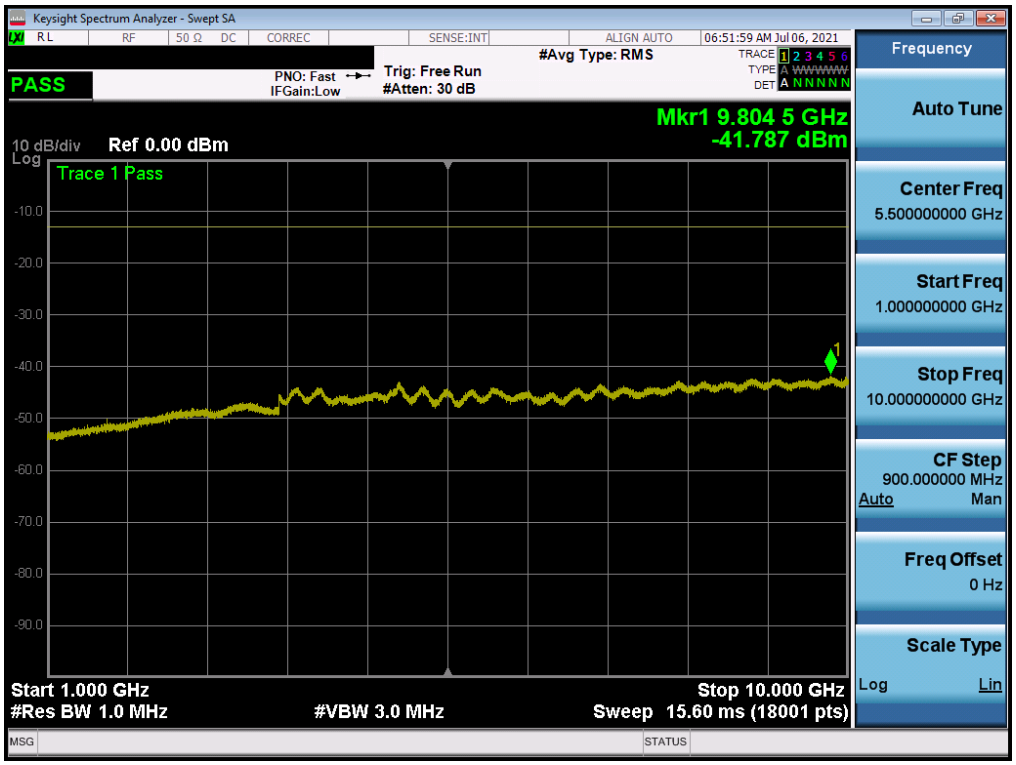

Plot 7-37. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - Low Channel)

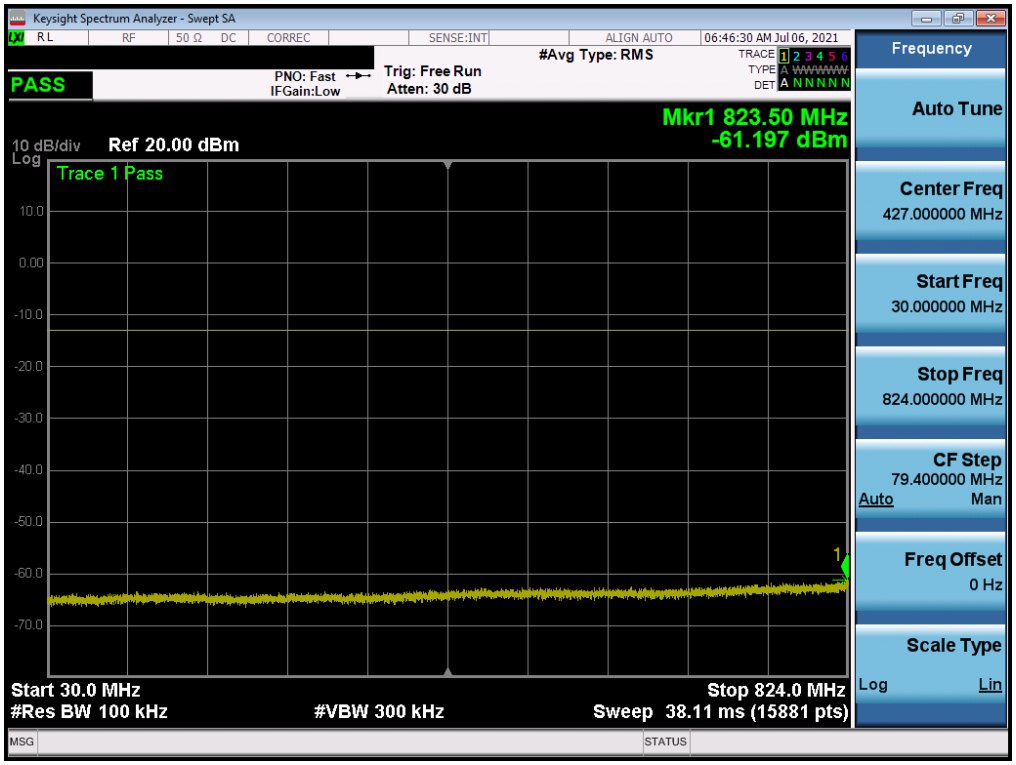

Plot 7-38. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - Mid Channel)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

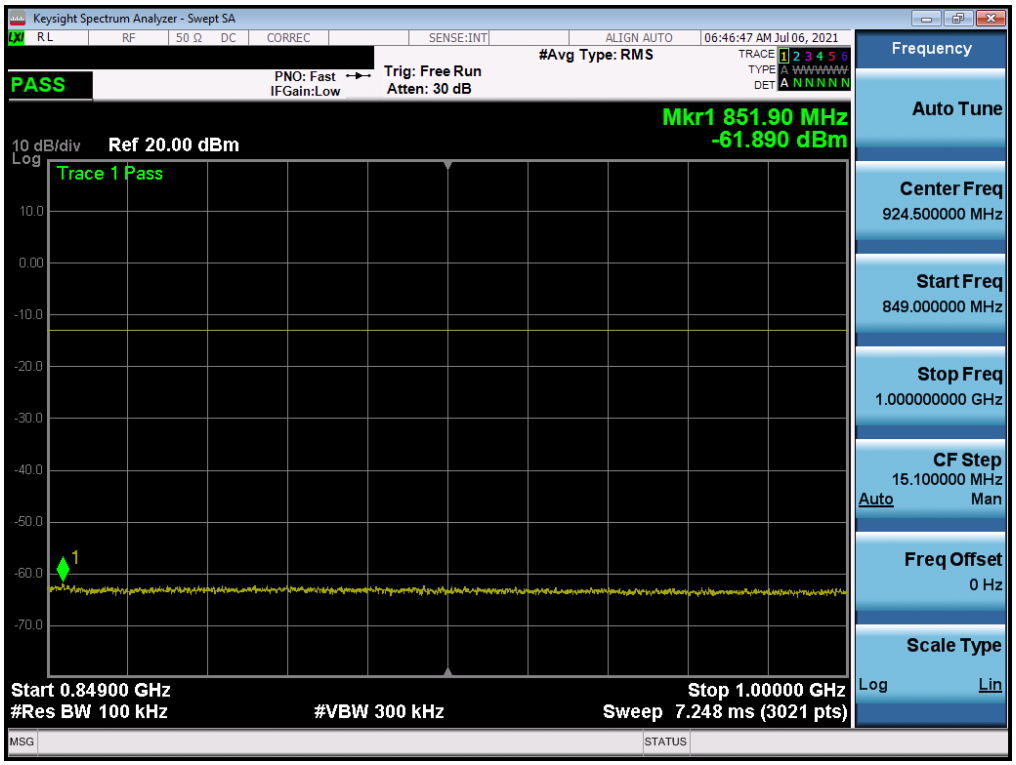

Plot 7-39. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - Mid Channel)

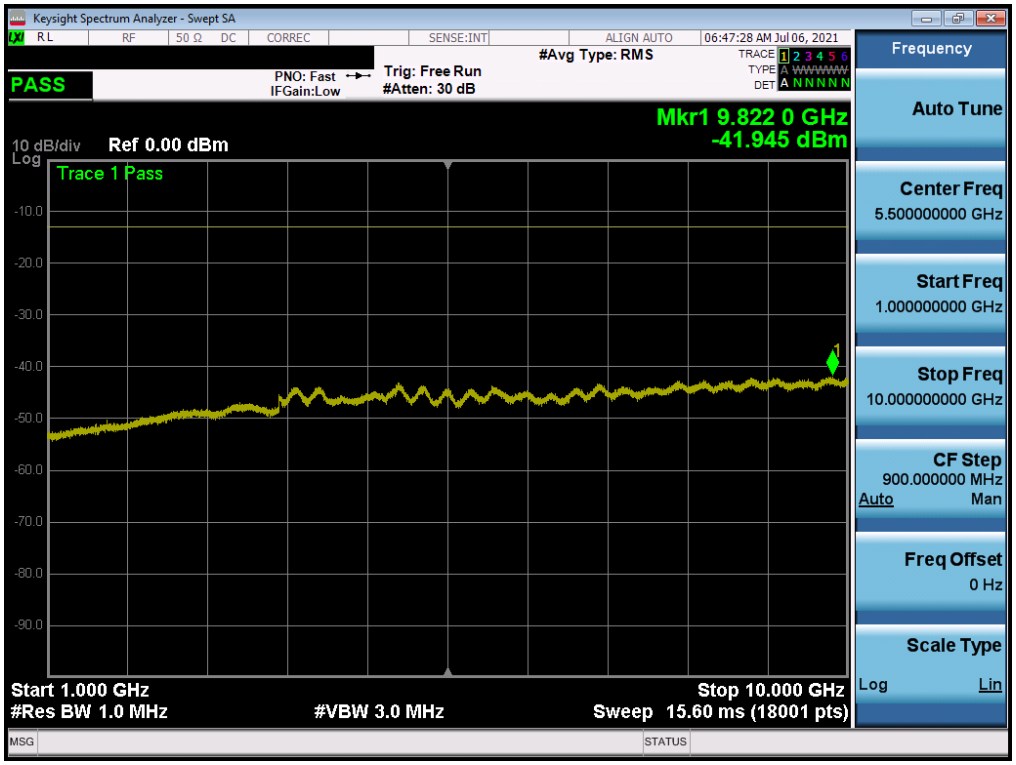

Plot 7-40. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - Mid Channel)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

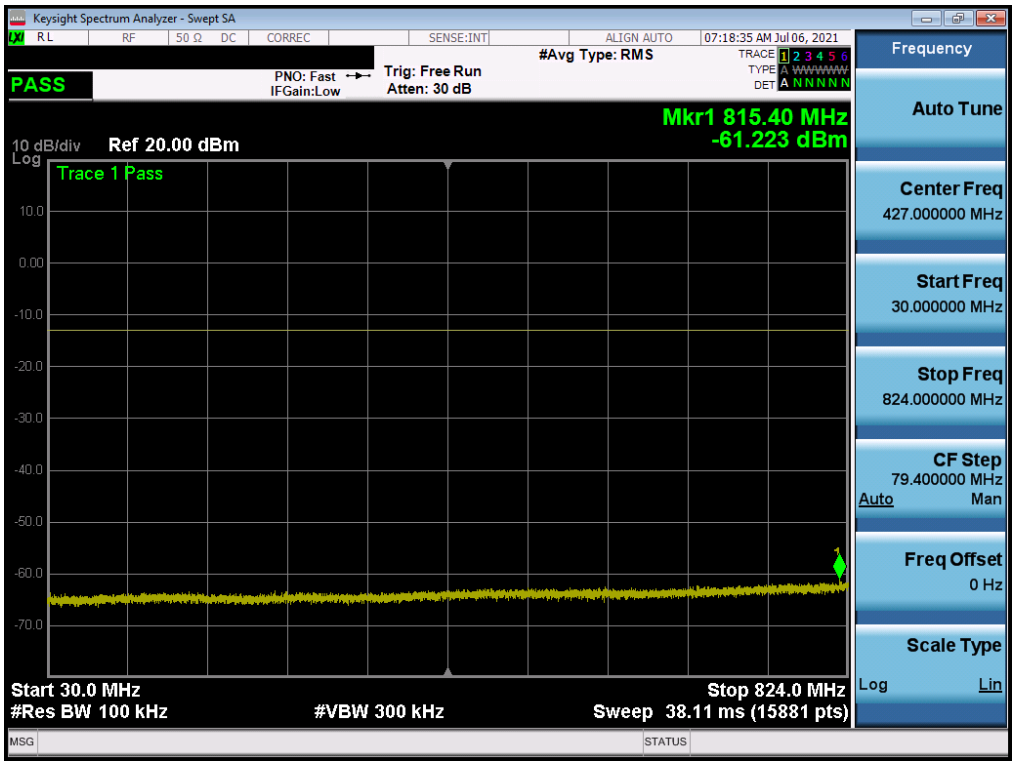

Plot 7-41. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - High Channel)

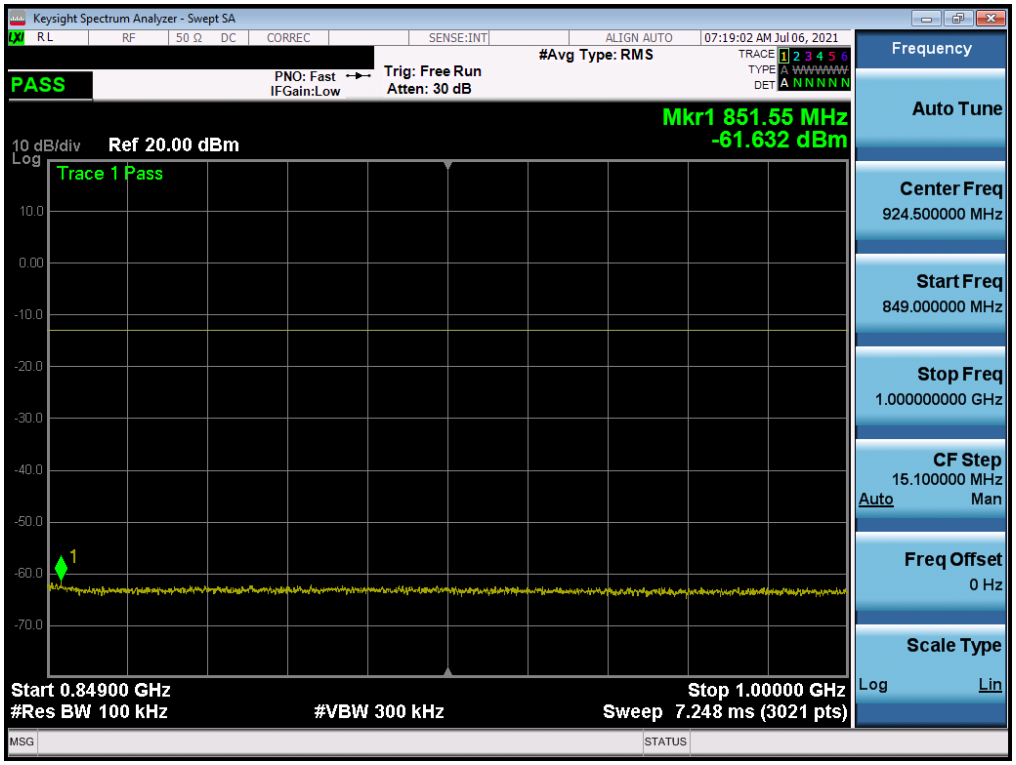

Plot 7-42. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - High Channel)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

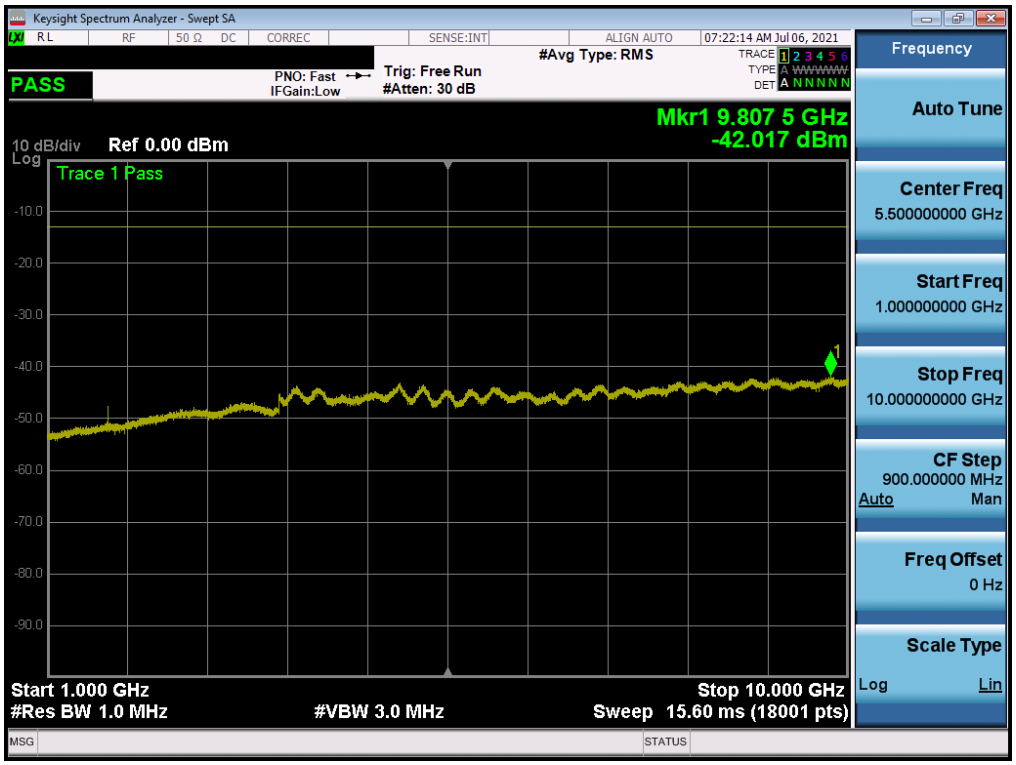

Plot 7-43. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - High Channel)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

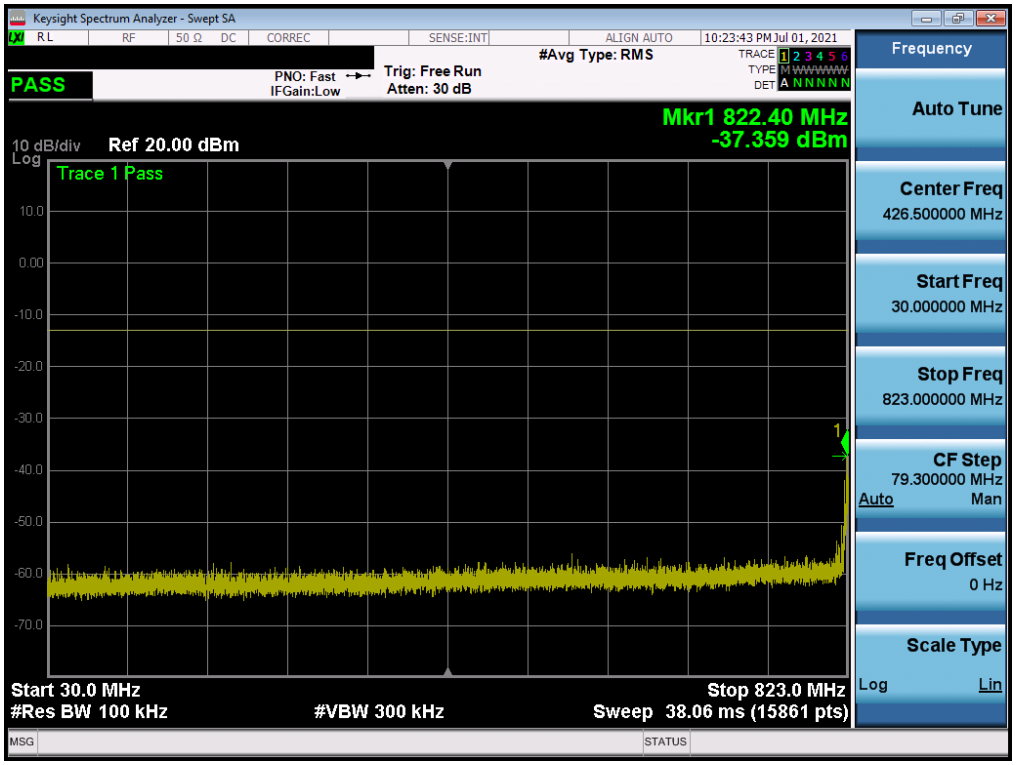

Plot 7-44. Conducted Spurious Plot (GPRS Ch. 128)

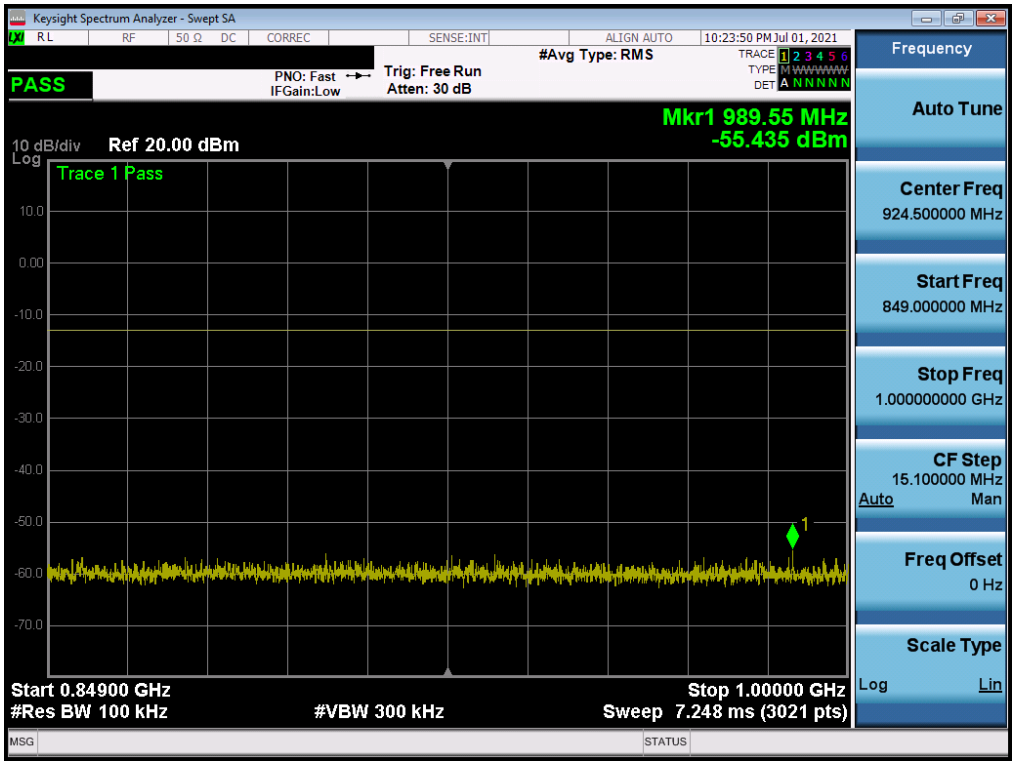

Plot 7-45. Conducted Spurious Plot (GPRS Ch. 128)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

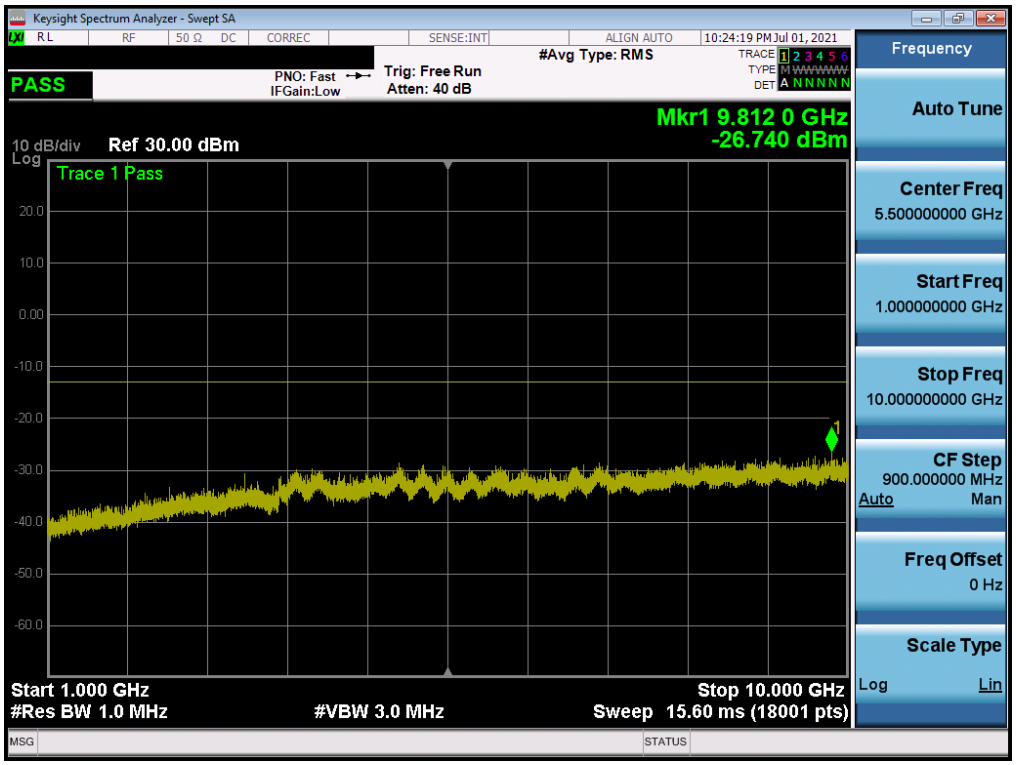

Plot 7-46. Conducted Spurious Plot (GPRS Ch. 128)

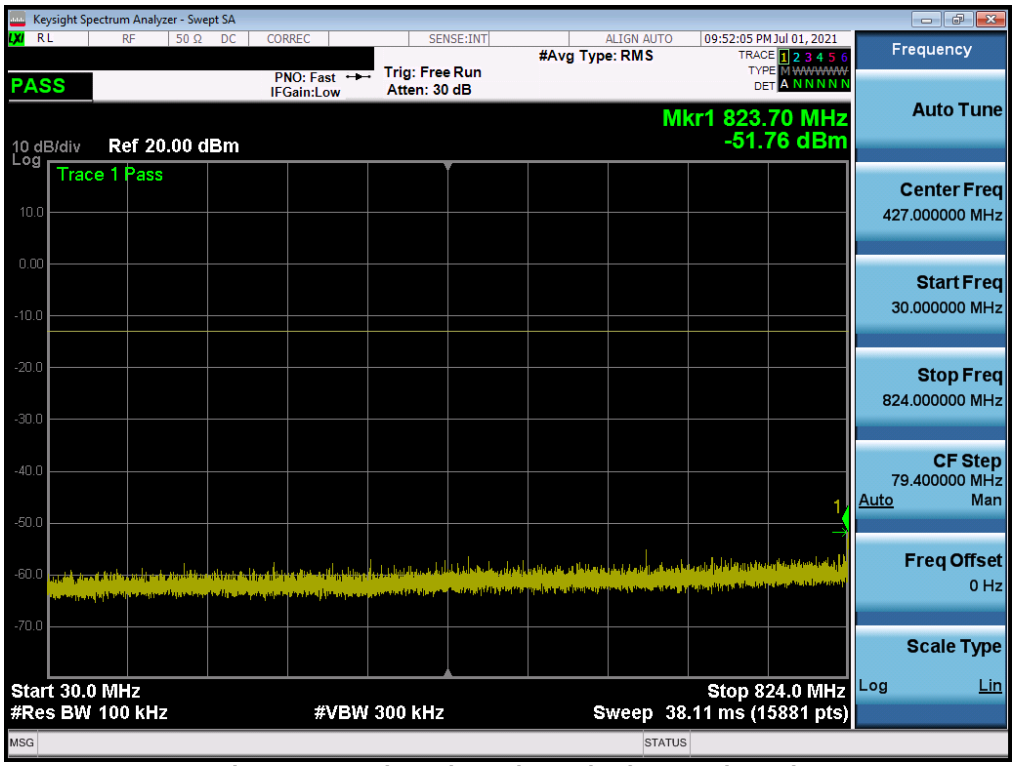

Plot 7-47. Conducted Spurious Plot (GPRS Ch. 190)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

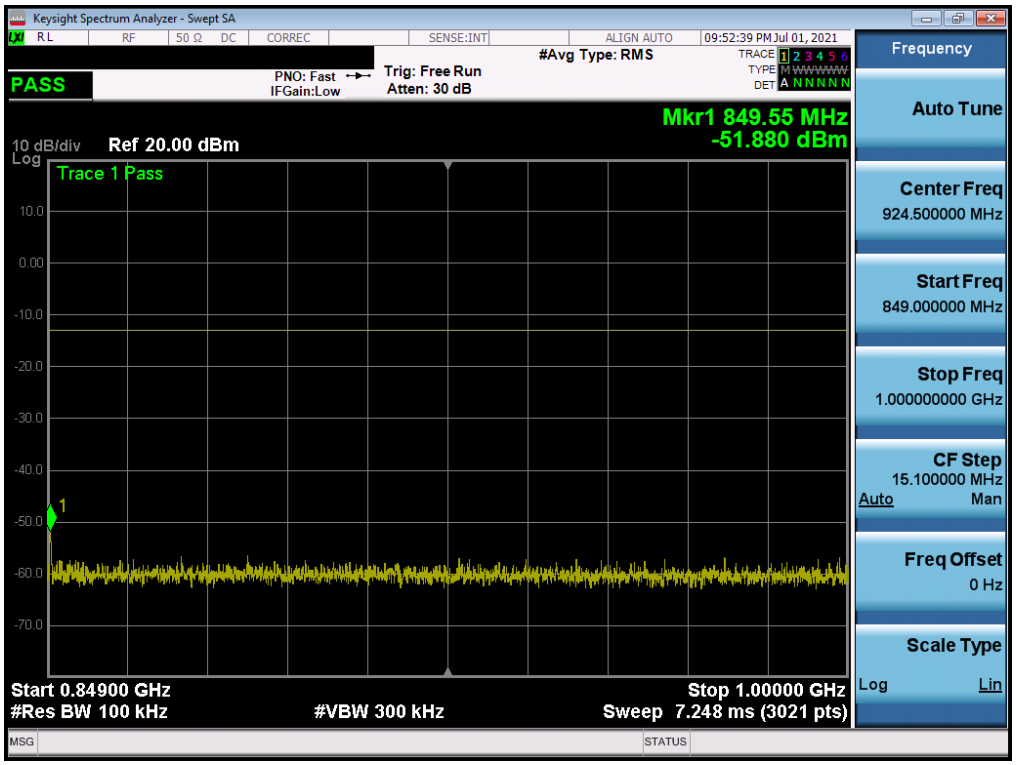

Plot 7-48. Conducted Spurious Plot (GPRS Ch. 190)

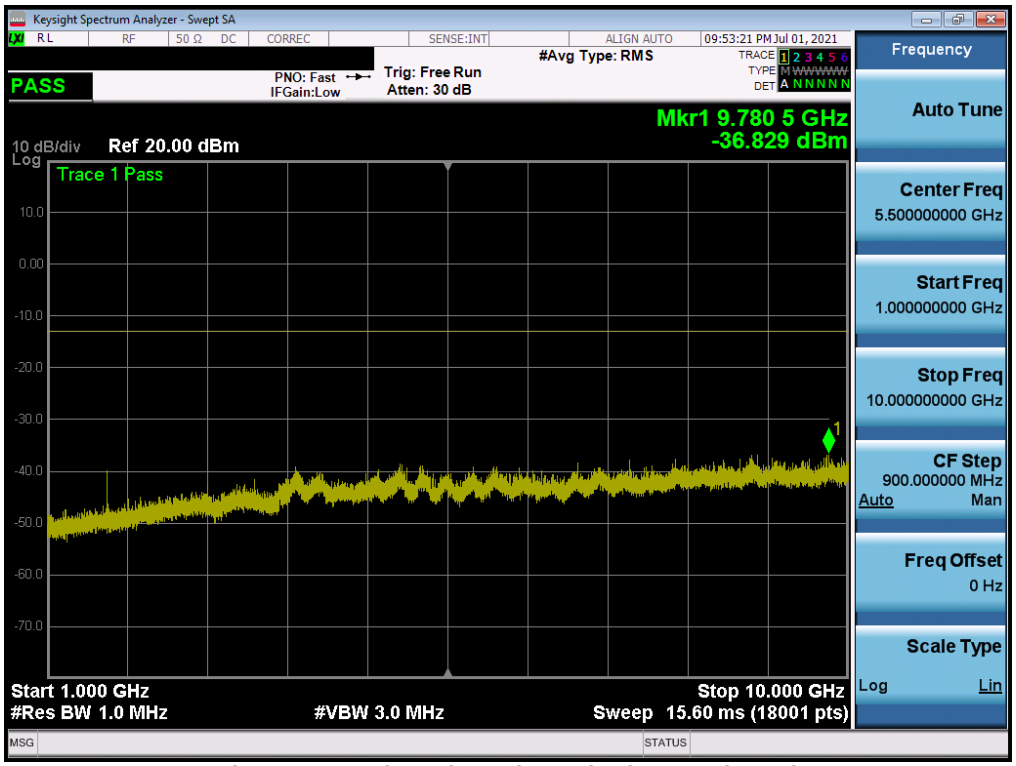

Plot 7-49. Conducted Spurious Plot (GPRS Ch. 190)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

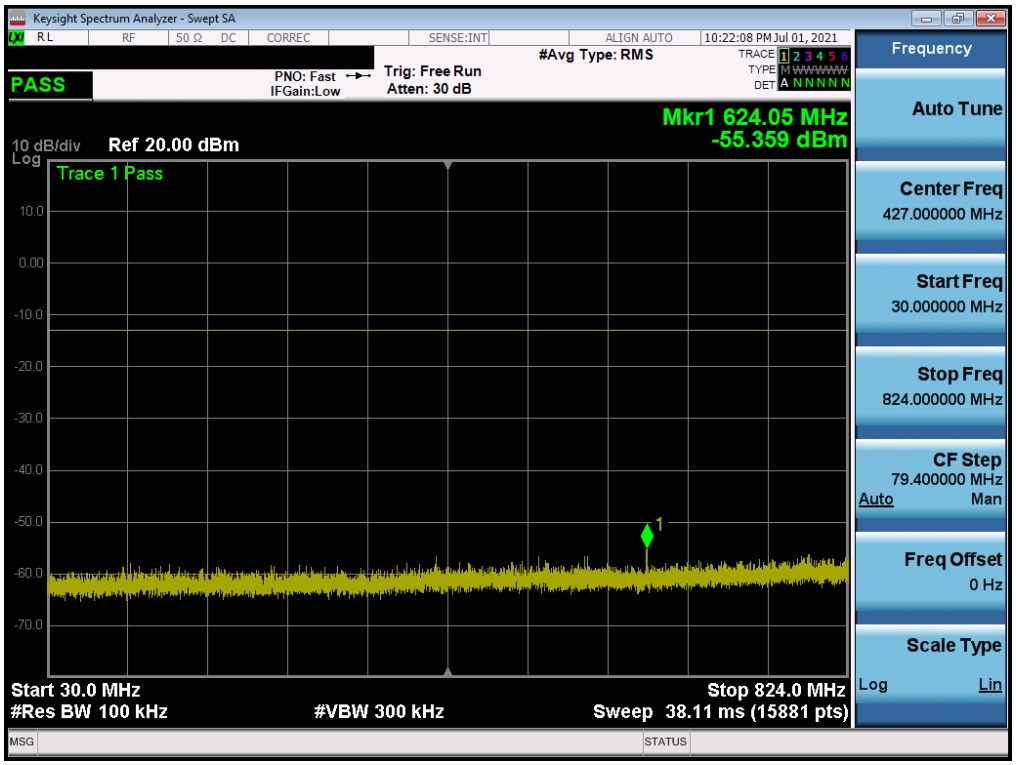

Plot 7-50. Conducted Spurious Plot (GPRS Ch. 251)

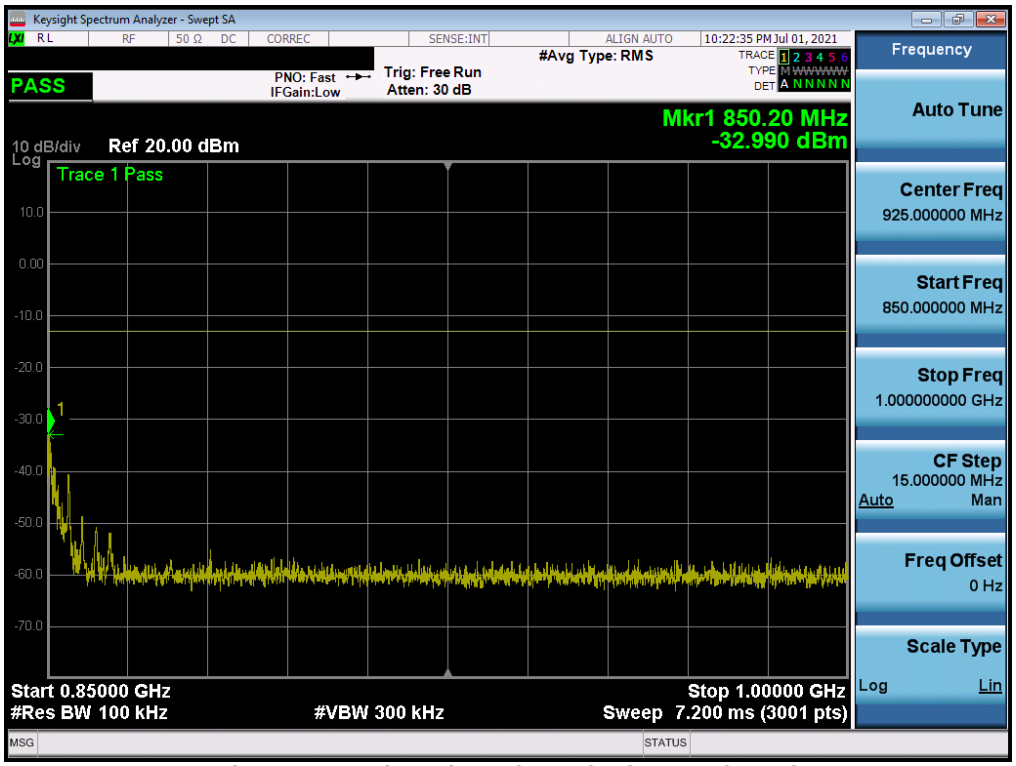

Plot 7-51. Conducted Spurious Plot (GPRS Ch. 251)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

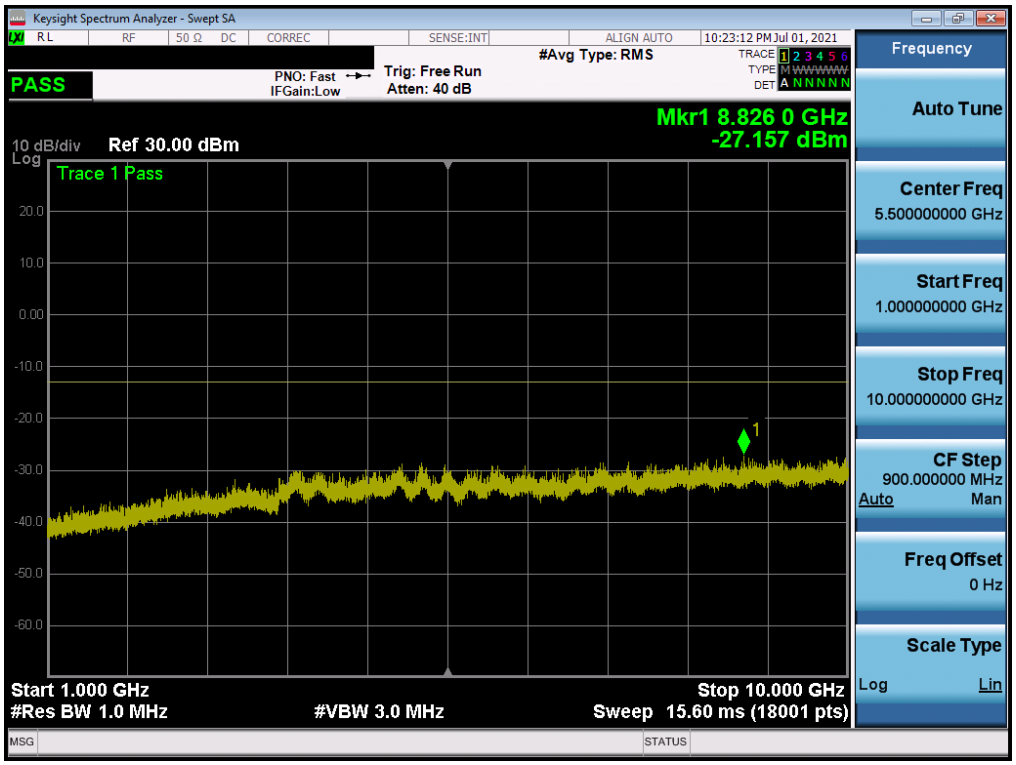

Plot 7-52. Conducted Spurious Plot (GPRS Ch. 251)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

WCDMA Cell

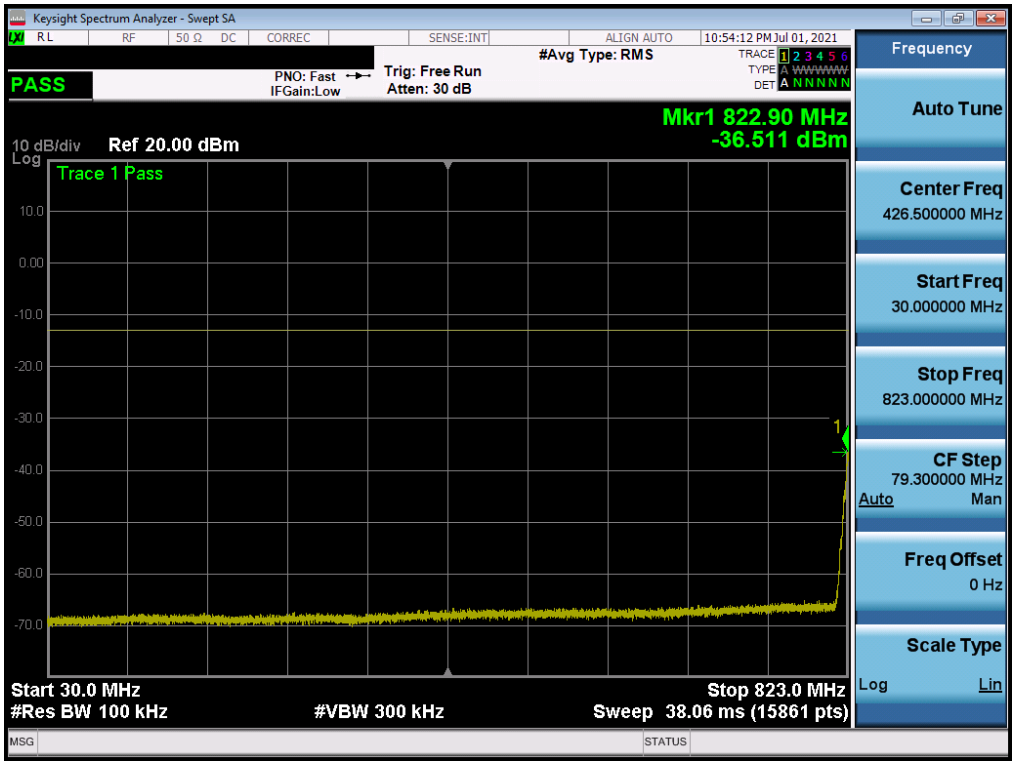

Plot 7-53. Conducted Spurious Plot (WCDMA Ch. 4132)

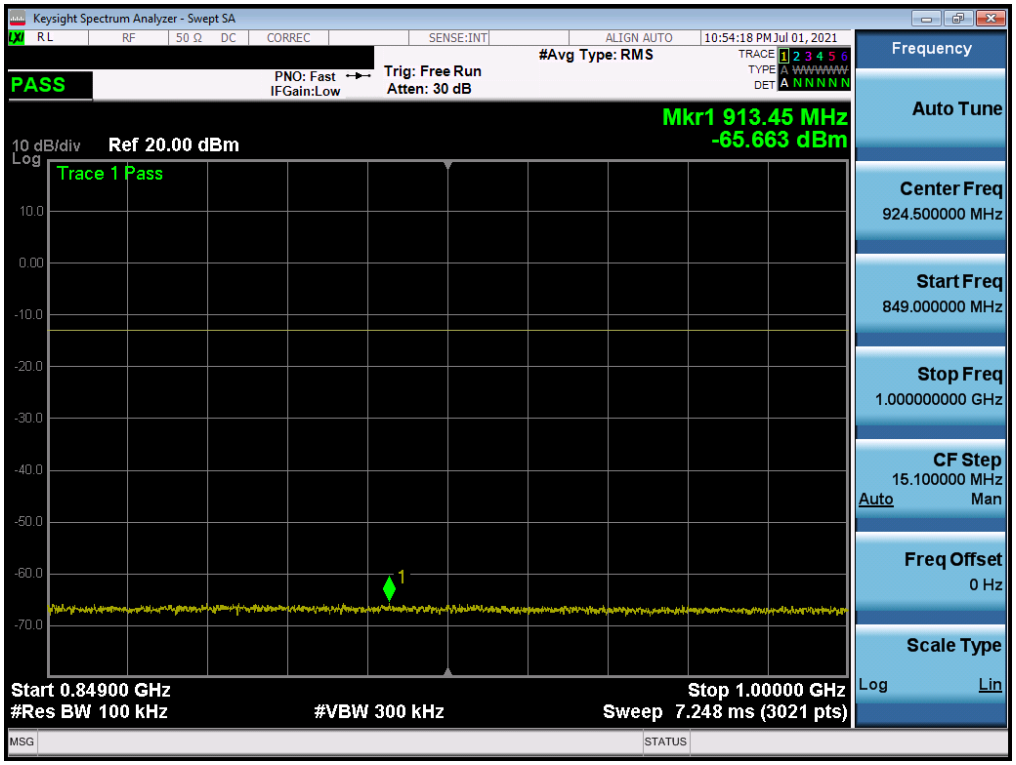

Plot 7-54. Conducted Spurious Plot (WCDMA Ch. 4132)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

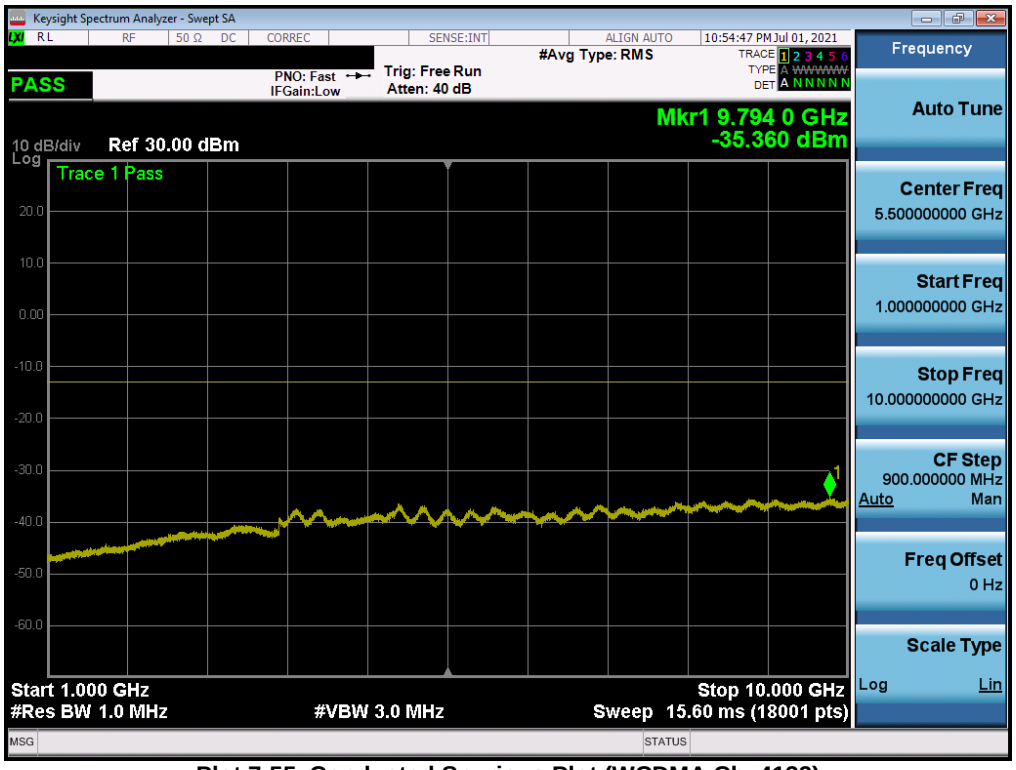

Plot 7-55. Conducted Spurious Plot (WCDMA Ch. 4132)

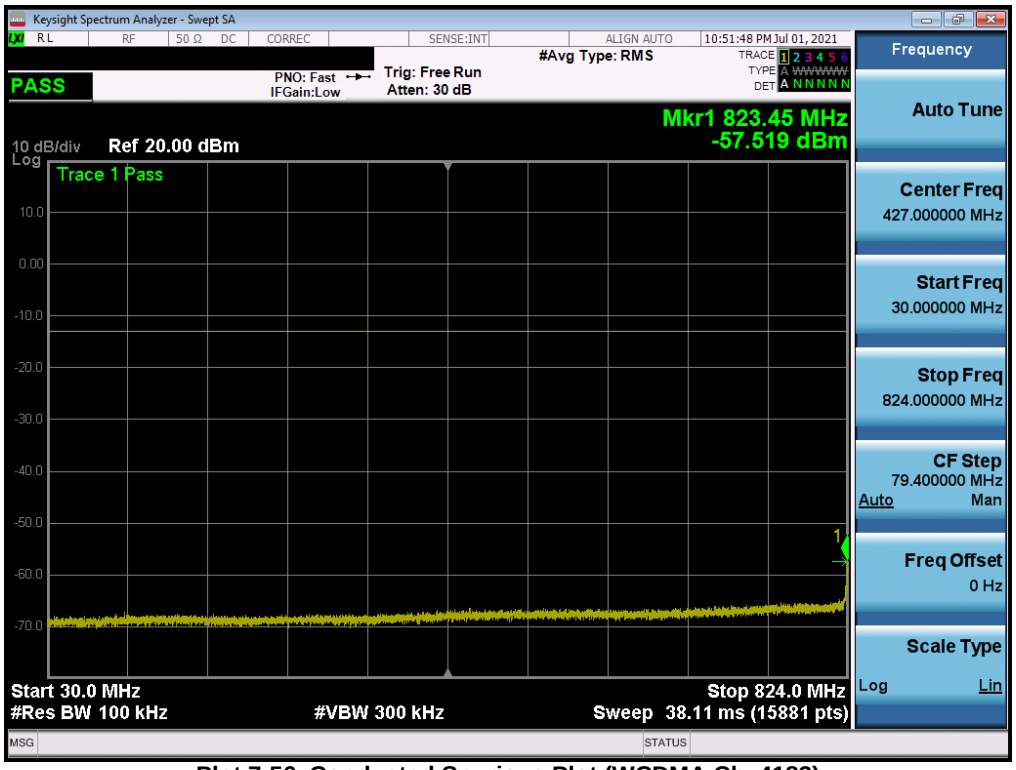

Plot 7-56. Conducted Spurious Plot (WCDMA Ch. 4183)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

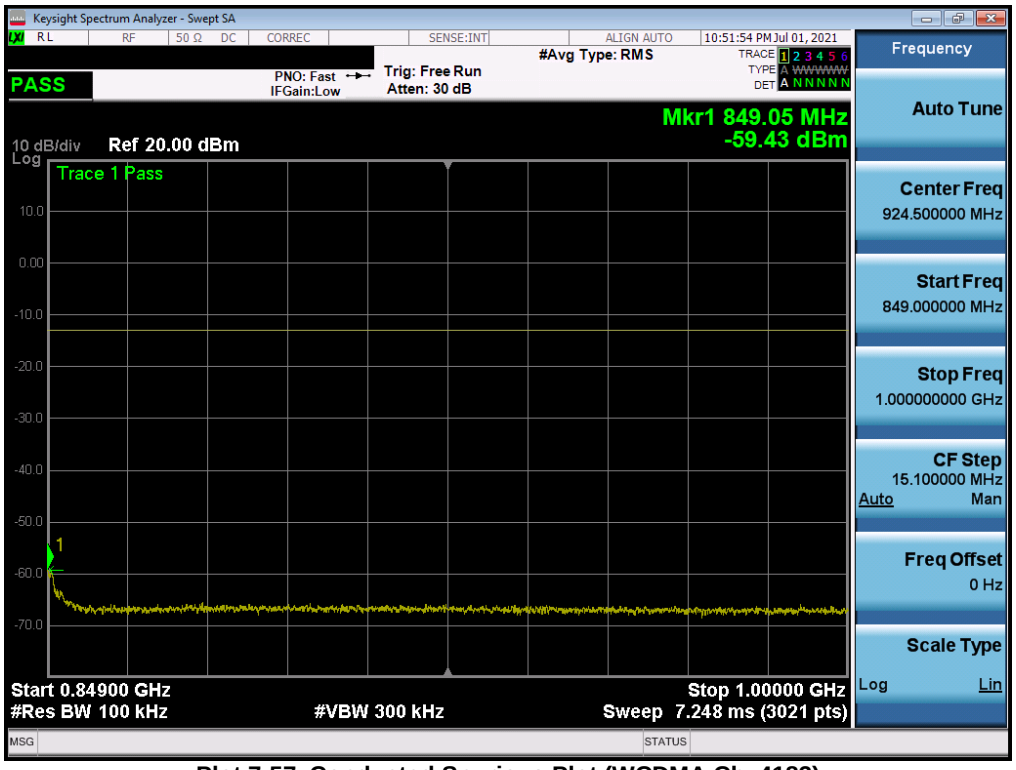

Plot 7-57. Conducted Spurious Plot (WCDMA Ch. 4183)

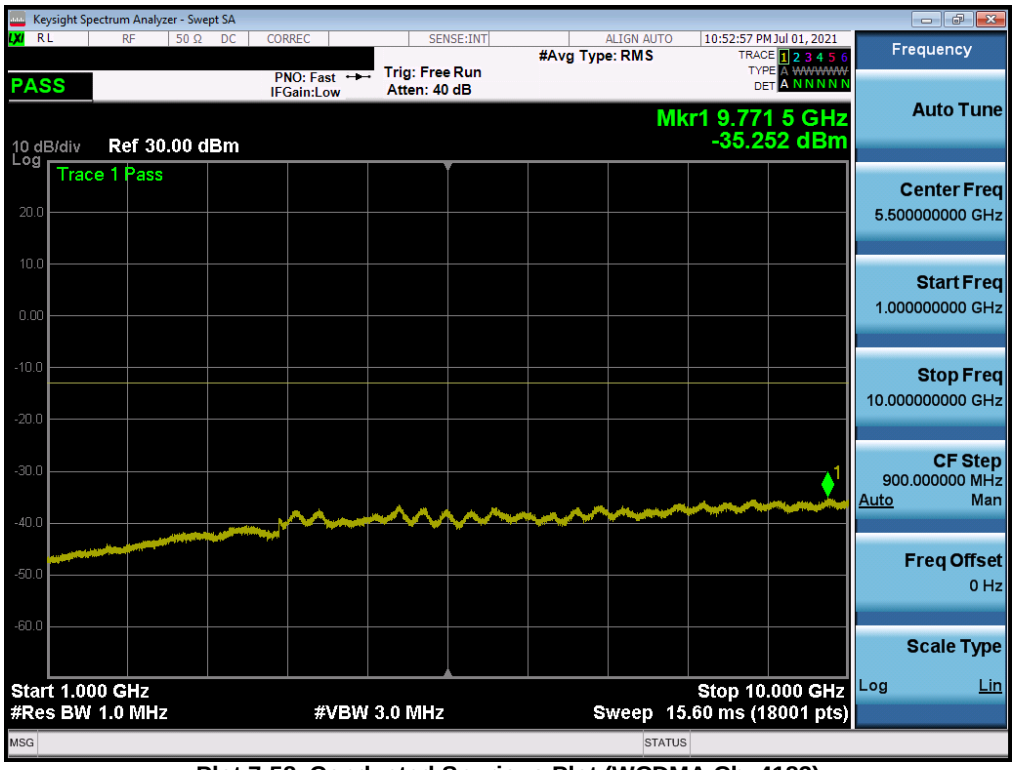

Plot 7-58. Conducted Spurious Plot (WCDMA Ch. 4183)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

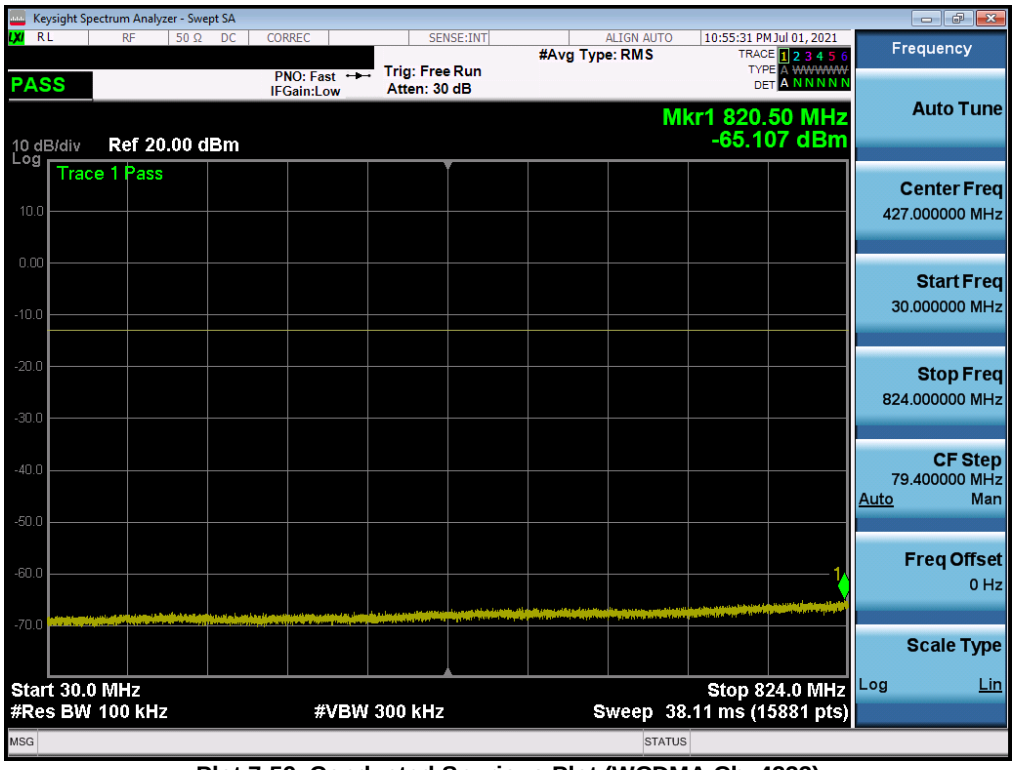

Plot 7-59. Conducted Spurious Plot (WCDMA Ch. 4233)

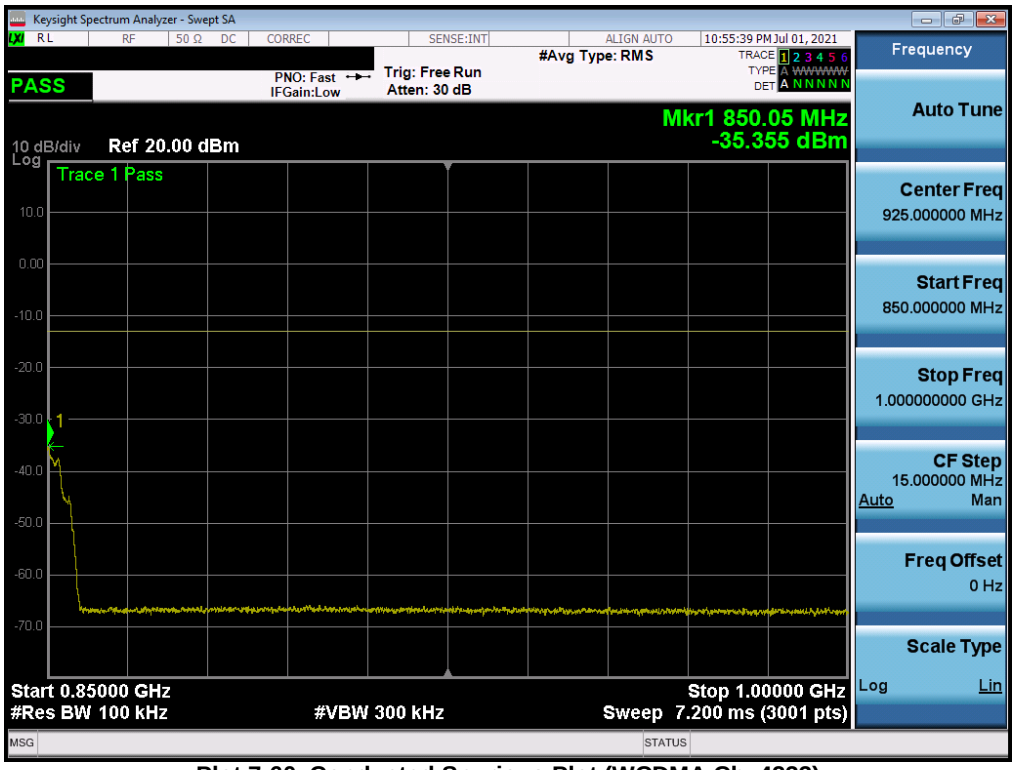

Plot 7-60. Conducted Spurious Plot (WCDMA Ch. 4233)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

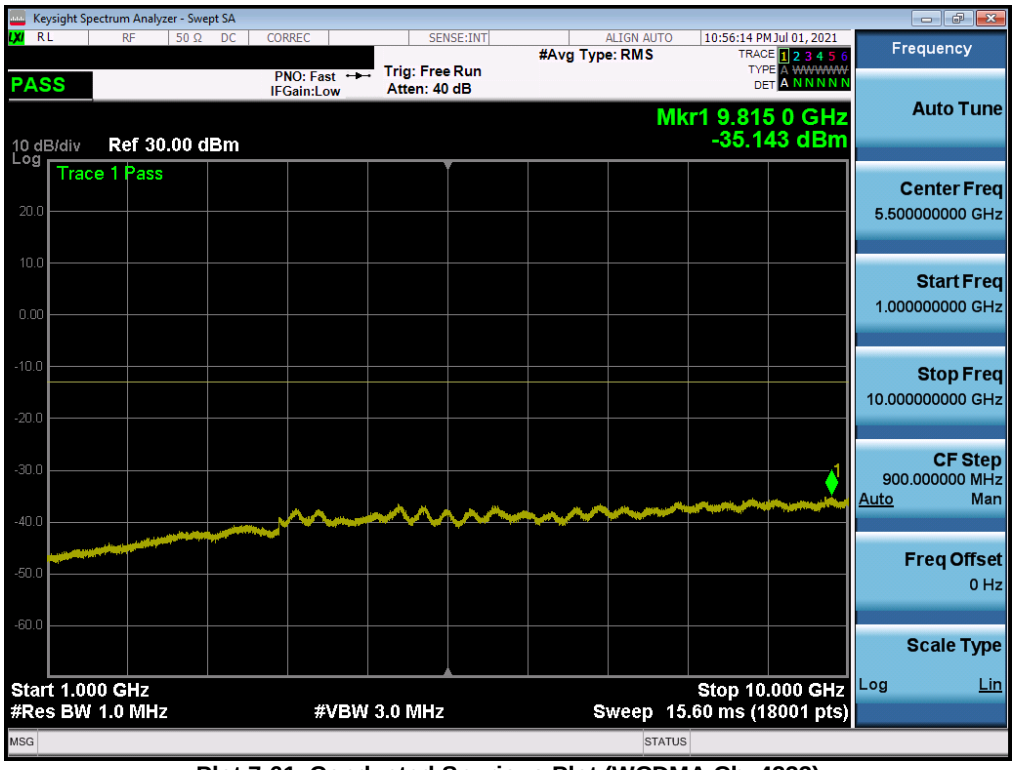

Plot 7-61. Conducted Spurious Plot (WCDMA Ch. 4233)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is 43 + 10 $log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW ≥ 1% of the emission bandwidth
4. VBW ≥ 3 x RBW
5. Detector = RMS
6. Number of sweep points ≥ 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

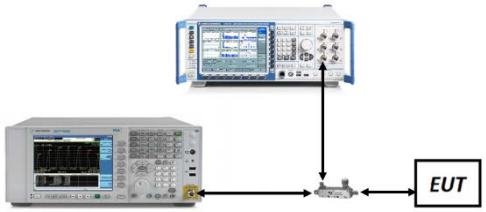

Figure 7-3. Test Instrument & Measurement Setup

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Test Notes

1. Per 22.917(b) and RSS-132(5.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

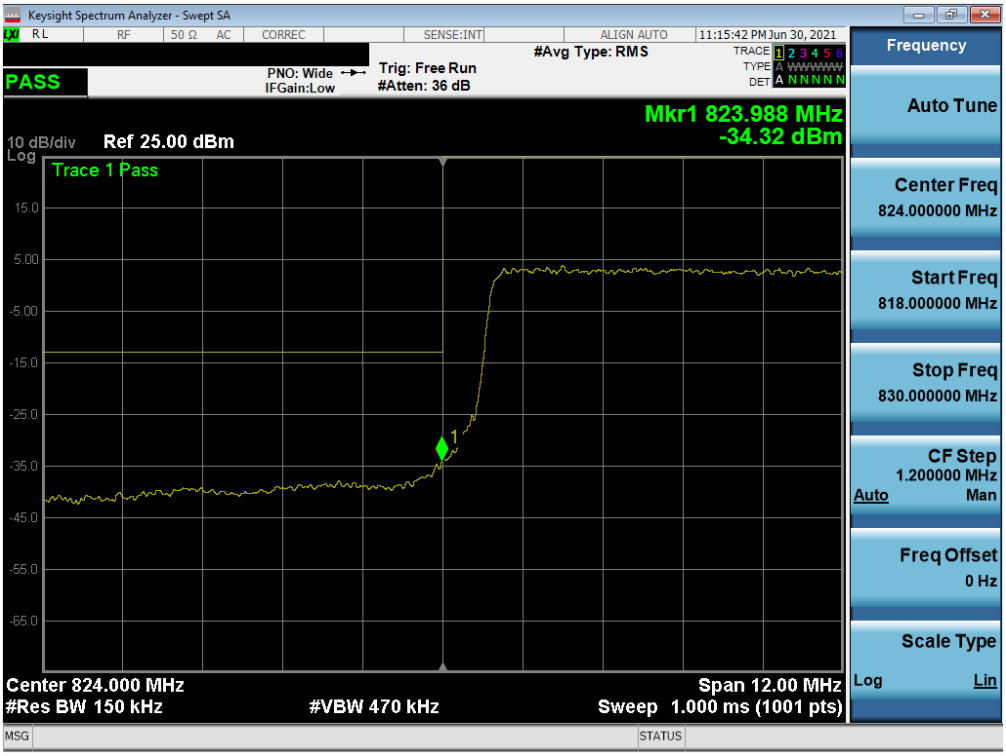

Plot 7-62. Lower Band Edge Plot (LTE Band 26 - 15MHz QPSK – Full RB)

Plot 7-63. Upper Band Edge Plot (LTE Band 26 - 15MHz QPSK – Full RB)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

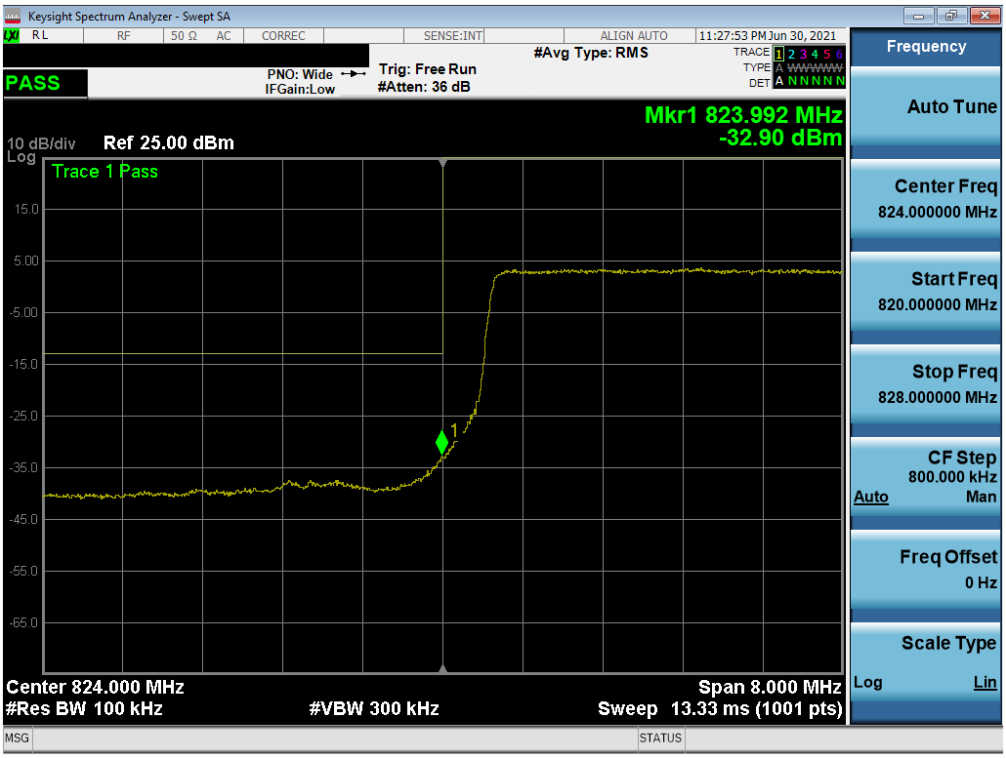

Plot 7-64. Lower Band Edge Plot (LTE Band 26/5 - 10MHz QPSK – Full RB)

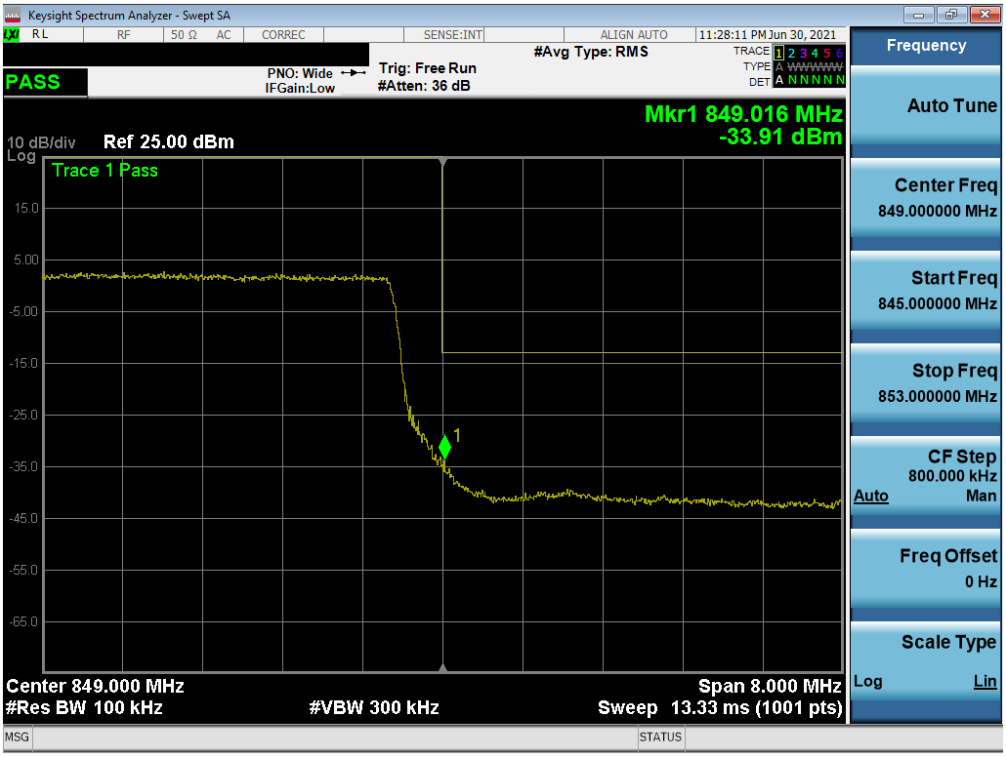

Plot 7-65. Upper Band Edge Plot (LTE Band 26/5 - 10MHz QPSK – Full RB)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

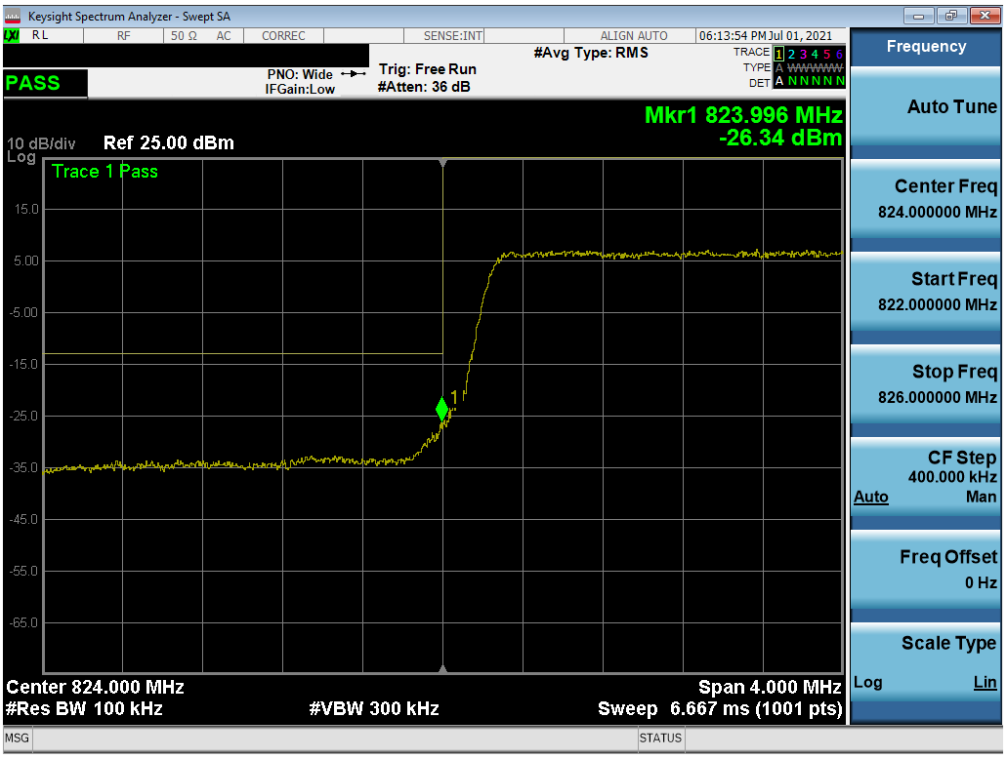

Plot 7-66. Lower Band Edge Plot (LTE Band 26/5 - 5MHz QPSK – Full RB)

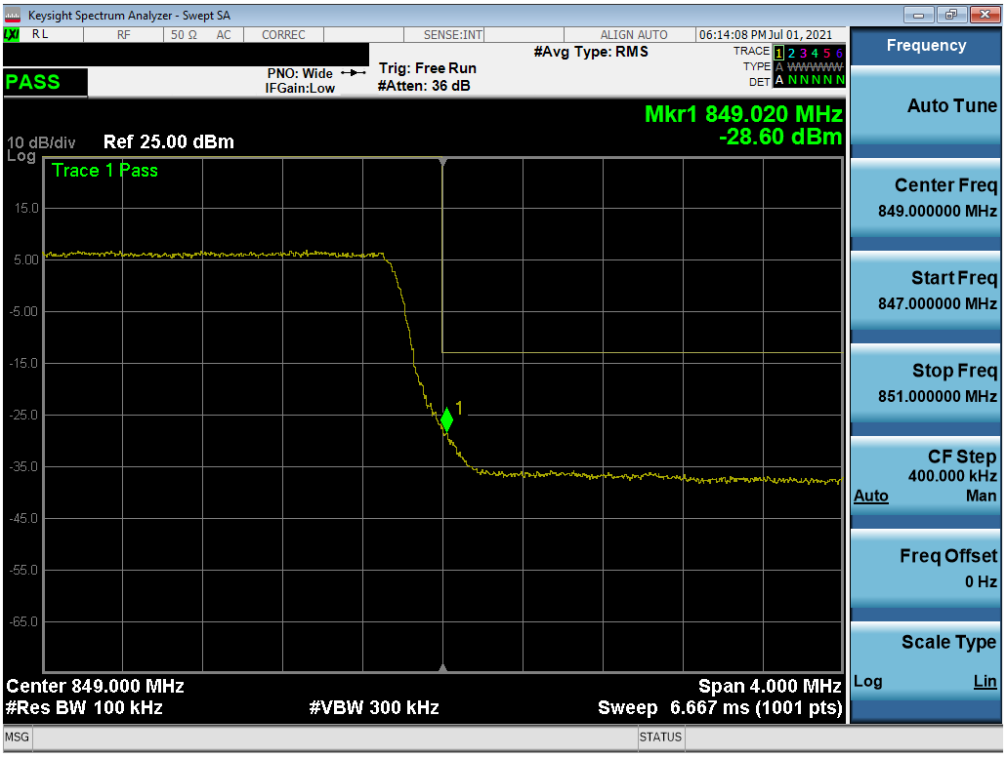

Plot 7-67. Upper Band Edge Plot (LTE Band 26/5 - 5MHz QPSK – Full RB)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

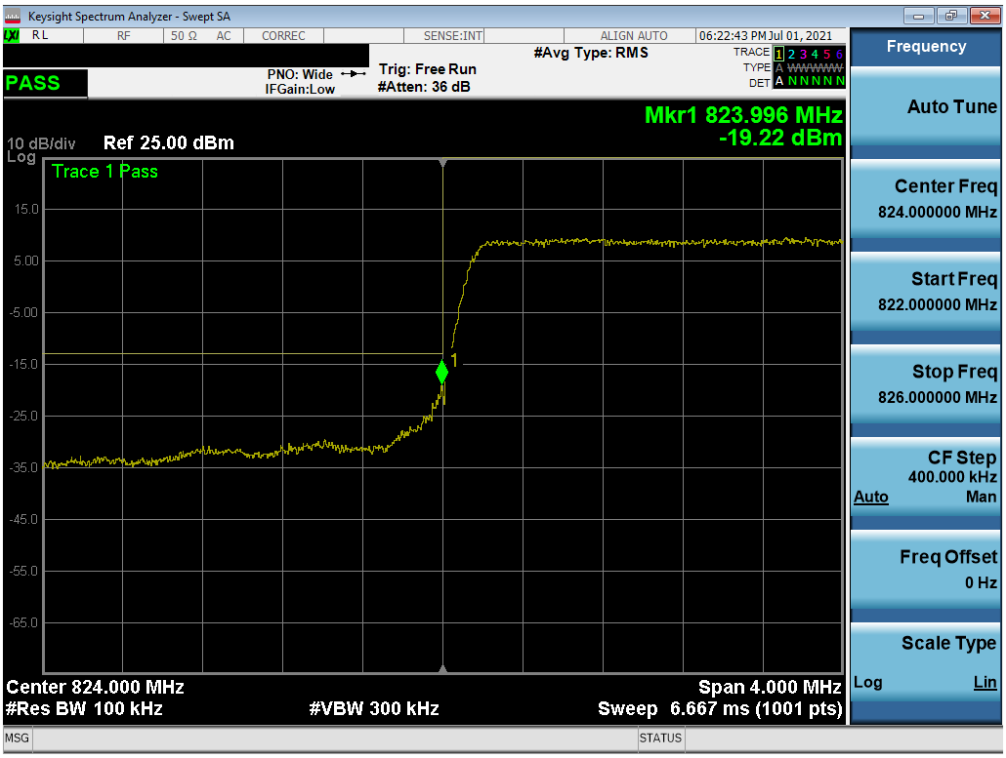

Plot 7-68. Lower Band Edge Plot (LTE Band 26/5 - 3MHz QPSK – Full RB)

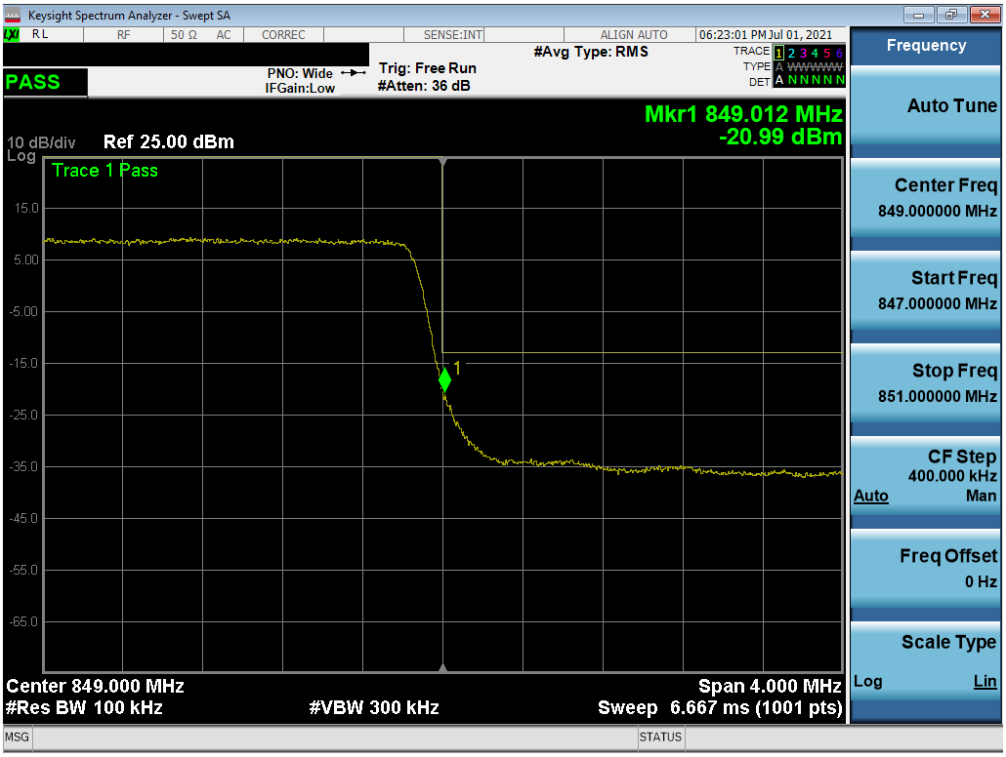

Plot 7-69. Upper Band Edge Plot (LTE Band 26/5 - 3MHz QPSK – Full RB)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

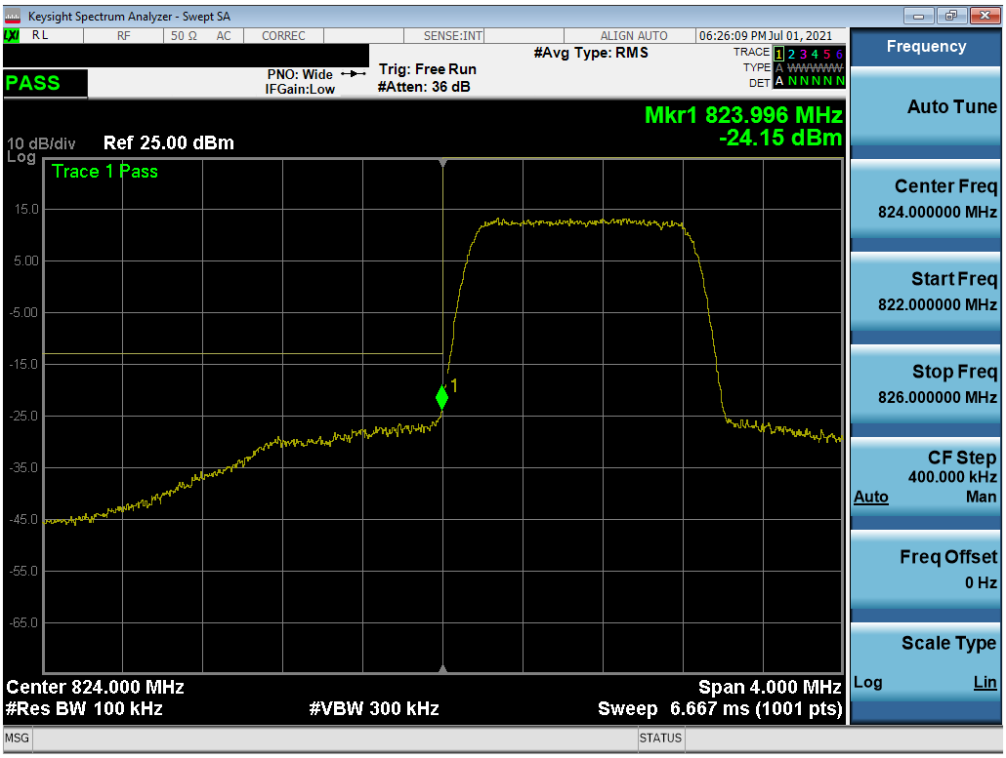

Plot 7-70. Lower Band Edge Plot (LTE Band 26/5 – 1.4MHz QPSK – Full RB)

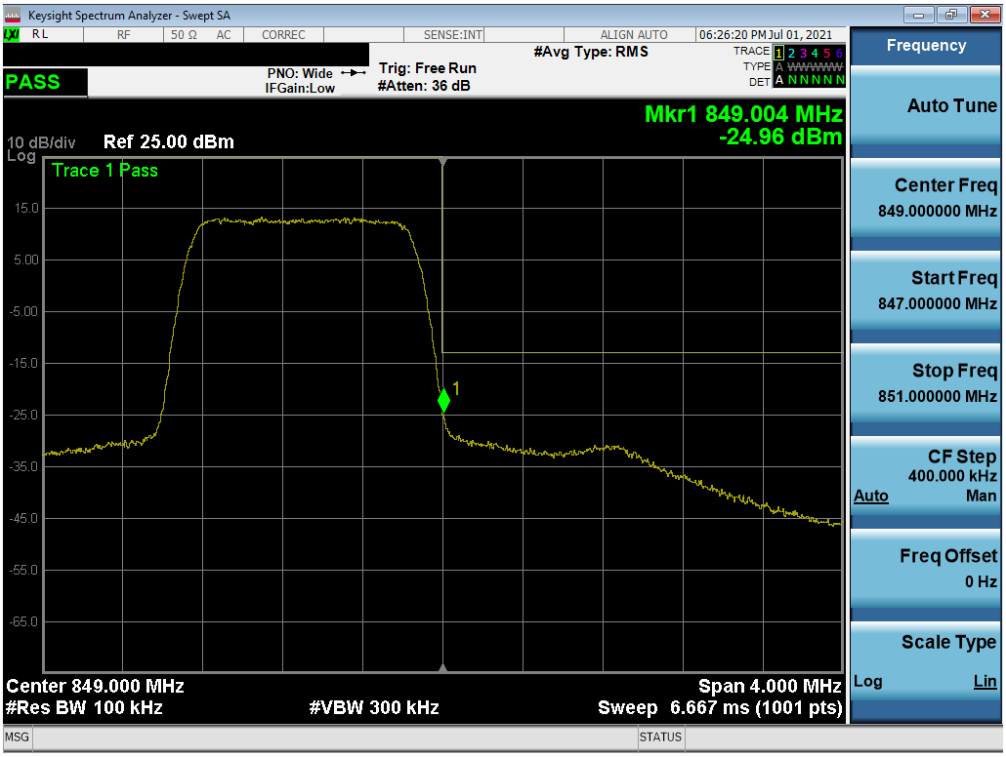

Plot 7-71. Upper Band Edge Plot (LTE Band 26/5 – 1.4MHz QPSK – Full RB)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

NR Band n5

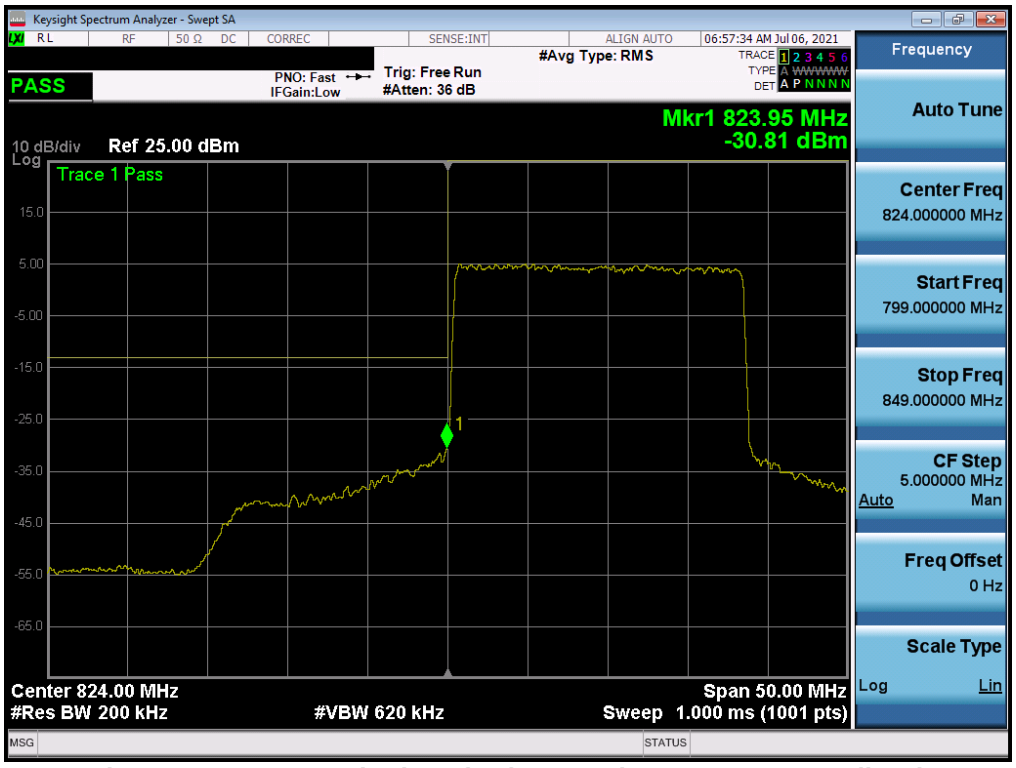

Plot 7-72. Lower Band Edge Plot (NR Band n5 – 20.0MHz - Full RB)

Plot 7-73. Upper Band Edge Plot (NR Band n5 – 20.0MHz - Full RB)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Plot 7-74. Lower Band Edge Plot (NR Band n5 – 15.0MHz - Full RB)

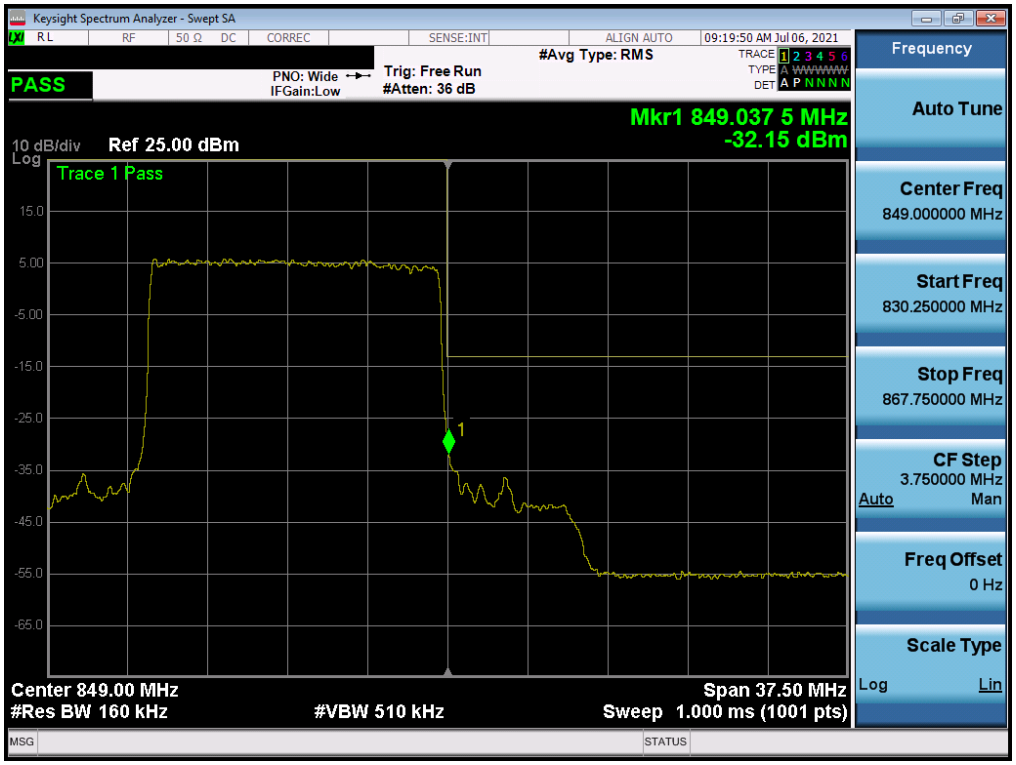

Plot 7-75. Upper Band Edge Plot (NR Band n5 – 15.0MHz - Full RB)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

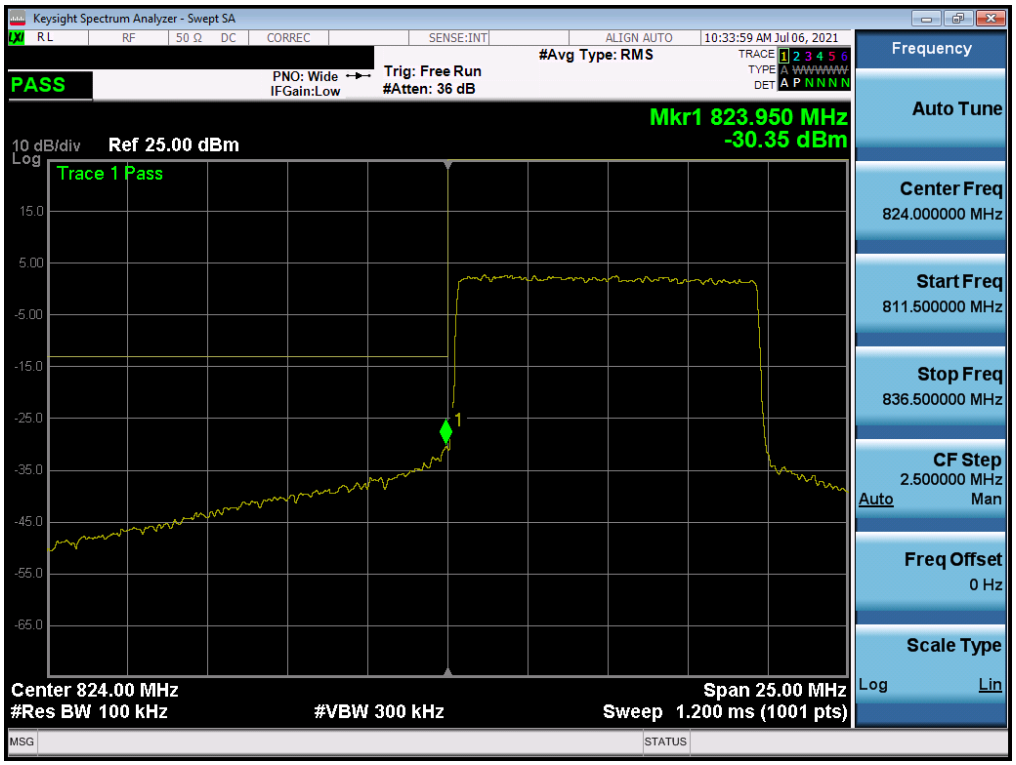

Plot 7-76. Lower Band Edge Plot (NR Band n5 – 10.0MHz - Full RB)

Plot 7-77. Upper Band Edge Plot (NR Band n5 – 10.0MHz - Full RB)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Plot 7-78. Lower Band Edge Plot (NR Band n5 – 5.0MHz - Full RB)

Plot 7-79. Upper Band Edge Plot (NR Band n5 – 5.0MHz - Full RB)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

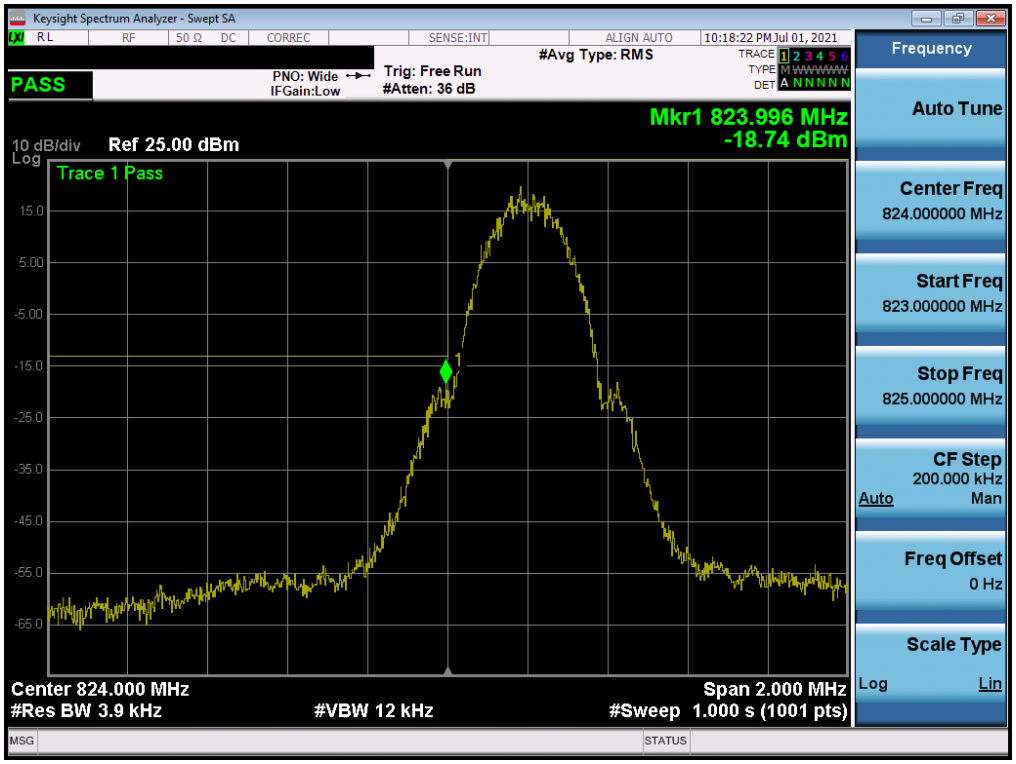

Plot 7-80. Lower Band Edge Plot (GPRS Cell – Ch. 128)

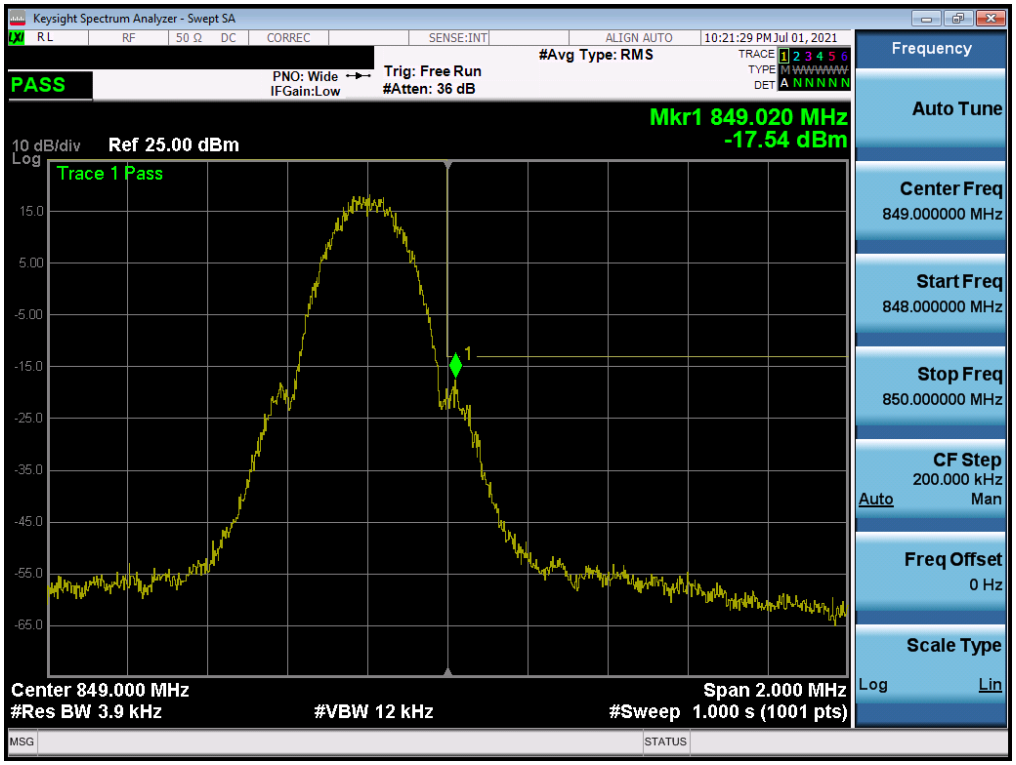

Plot 7-81. Upper Band Edge Plot (GPRS Cell – Ch. 251)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

WCDMA Cell

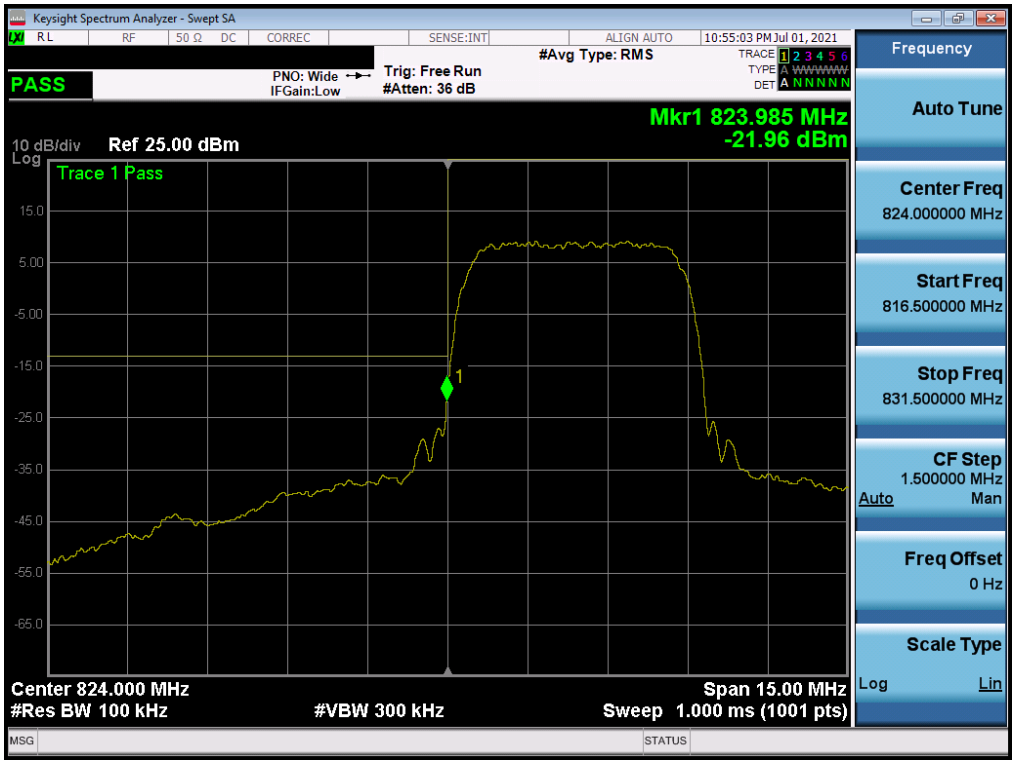

Plot 7-82. Lower Band Edge Plot (WCDMA Cell – Ch. 4132)

Plot 7-83. Upper Band Edge Plot (WCDMA Cell – Ch. 4233)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.5 Radiated Power (ERP)

Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW ≥ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points ≥ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto". Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

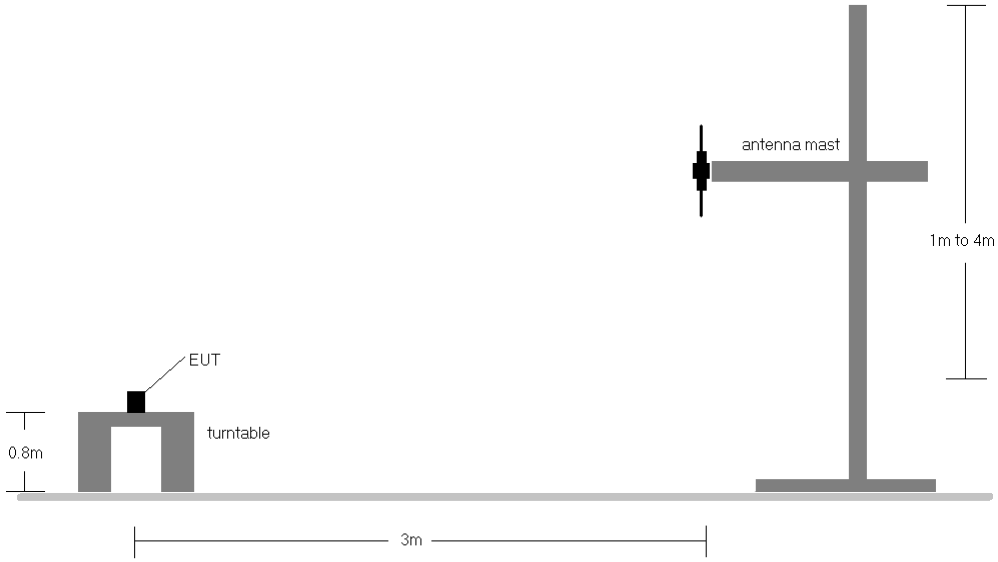

Figure 7-4. Radiated Test Setup <1GHz

Test Notes

1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.

2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".

3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.

4) This unit was tested with its standard battery.

5) For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
15MHz (Band 26 only)	QPSK	831.5	H	202	290	6.73	1 / 74	13.33	17.91	0.062	38.45	-20.54
		836.5	H	201	289	6.73	1 / 37	13.37	17.95	0.062	38.45	-20.50
		841.5	H	203	289	6.73	1 / 0	13.48	**18.06**	0.064	38.45	-20.39
	16-QAM	841.5	H	203	289	6.73	1 / 0	12.60	17.18	0.052	38.45	-21.27
10 MHz	QPSK	829.0	H	202	290	6.70	1 / 25	13.46	18.01	0.063	38.45	-20.44
		836.5	H	201	289	6.73	1 / 25	13.47	18.05	0.064	38.45	-20.40
		844.0	H	203	289	6.76	1 / 25	13.55	**18.16**	0.065	38.45	-20.29
	16-QAM	844.0	H	203	289	6.76	1 / 25	12.45	17.06	0.051	38.45	-21.39
5 MHz	QPSK	826.5	H	202	290	6.67	1 / 12	13.48	18.00	0.063	38.45	-20.45
		836.5	H	201	289	6.73	1 / 12	13.50	18.08	0.064	38.45	-20.37
		846.5	H	203	289	6.78	1 / 12	13.67	**18.30**	0.068	38.45	-20.15
	16-QAM	846.5	H	203	289	6.78	1 / 12	12.65	17.28	0.053	38.45	-21.17
3 MHz	QPSK	825.5	H	202	290	6.66	1 / 7	13.60	18.11	0.065	38.45	-20.34
		836.5	H	201	289	6.73	1 / 7	13.64	18.22	0.066	38.45	-20.23
		847.5	H	203	289	6.79	1 / 7	13.71	**18.35**	0.068	38.45	-20.10
	16-QAM	847.5	H	203	289	6.79	1 / 7	12.58	17.22	0.053	38.45	-21.23
1.4 MHz	QPSK	824.7	H	202	290	6.66	1 / 3	13.36	17.86	0.061	38.45	-20.59
		836.5	H	201	289	6.73	1 / 3	13.20	17.78	0.060	38.45	-20.67
		848.3	H	203	289	6.77	1 / 3	13.40	**18.02**	0.063	38.45	-20.43
	16-QAM	848.3	H	203	289	6.77	1 / 3	12.42	17.04	0.051	38.45	-21.41
15 MHz	QPSK (Opposite Pol.)	841.5	V	124	198	6.33	1 / 74	13.52	17.70	0.059	38.45	-20.75

Table 7-2. ERP Data (LTE Band 26/5)

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
20 MHz	π/2 BPSK	836.5	H	174	312	6.73	1 / 53	12.37	16.95	0.050	38.45	-21.50
	QPSK	834.0	H	177	312	6.65	1 / 79	12.45	16.95	0.050	38.45	-21.50
		836.5	H	174	312	6.73	1 / 79	12.90	17.48	0.056	38.45	-20.97
		839.0	H	179	303	6.80	1 / 79	12.85	**17.50**	0.056	38.45	-20.95
	16-QAM	836.5	H	174	312	6.73	1 / 53	11.60	16.18	0.041	38.45	-22.27
15 MHz	π/2 BPSK	836.5	H	174	312	6.73	1 / 58	12.46	17.04	0.051	38.45	-21.41
	QPSK	831.5	H	177	312	6.73	1 / 58	12.34	16.92	0.049	38.45	-21.53
		836.5	H	174	312	6.73	1 / 20	12.82	**17.40**	0.055	38.45	-21.05
	16-QAM	836.5	H	174	312	6.73	1 / 58	11.76	16.33	0.043	38.45	-22.12
	π/2 BPSK	836.5	H	174	312	6.73	1 / 26	12.58	17.16	0.052	38.45	-21.29
10 MHz	QPSK	829.0	H	177	312	6.70	1 / 38	12.45	17.00	0.050	38.45	-21.46
		836.5	H	174	312	6.73	1 / 38	13.06	17.64	0.058	38.45	-20.81
		844.0	H	179	303	6.76	1 / 38	13.07	**17.67**	0.059	38.45	-20.78
	16-QAM	836.5	H	174	312	6.73	1 / 26	11.60	16.18	0.042	38.45	-22.27
	π/2 BPSK	836.5	H	174	312	6.73	1 / 12	12.42	17.00	0.050	38.45	-21.45
5 MHz	QPSK	829.0	H	177	312	6.67	1 / 18	12.49	17.02	0.050	38.45	-21.43
		836.5	H	174	312	6.73	1 / 12	13.04	17.62	0.058	38.45	-20.83
		844.0	H	179	303	6.78	1 / 6	13.08	**17.71**	0.059	38.45	-20.74
	16-QAM	836.5	H	174	312	6.73	1 / 18	11.40	15.98	0.040	38.45	-22.47
20 MHz	QPSK (CP-OFDM)	839.0	H	179	303	6.80	1 / 79	11.68	**16.33**	0.043	38.45	-22.12
	QPSK (Opposite Pol.)	839.0	V	107	308	6.80	1 / 79	12.68	17.33	0.054	38.45	-21.12

Table 7-3. ERP Data (NR Band n5)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.20	GPRS850	H	102	285	21.35	6.65	**25.85**	**0.385**	38.45	-12.60
836.60	GPRS850	H	103	290	21.20	6.74	25.79	0.379	38.45	-12.66
848.80	GPRS850	H	112	292	21.08	6.73	25.66	0.368	38.45	-12.80
824.20	GPRS850	V	116	300	20.67	6.18	24.70	0.295	38.45	-13.75
824.20	EDGE850	H	102	285	15.86	6.65	**20.36**	0.109	38.45	-18.09

Table 7-4. ERP Data (GPRS Cell)

© 2021 PCTEST V2.0 3/15/2021

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
826.40	WCDMA850	H	100	286	13.60	6.67	18.12	0.065	38.45	-20.33
836.60	WCDMA850	H	204	291	14.08	6.74	**18.67**	**0.074**	38.45	-19.78
846.60	WCDMA850	H	205	290	14.00	6.78	18.63	0.073	38.45	-19.82
836.60	WCDMA850	V	132	228	14.18	6.18	18.21	0.066	38.45	-20.24

Table 7-5. ERP Data (WCDMA Cell)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.6 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW ≥ 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points ≥ 2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

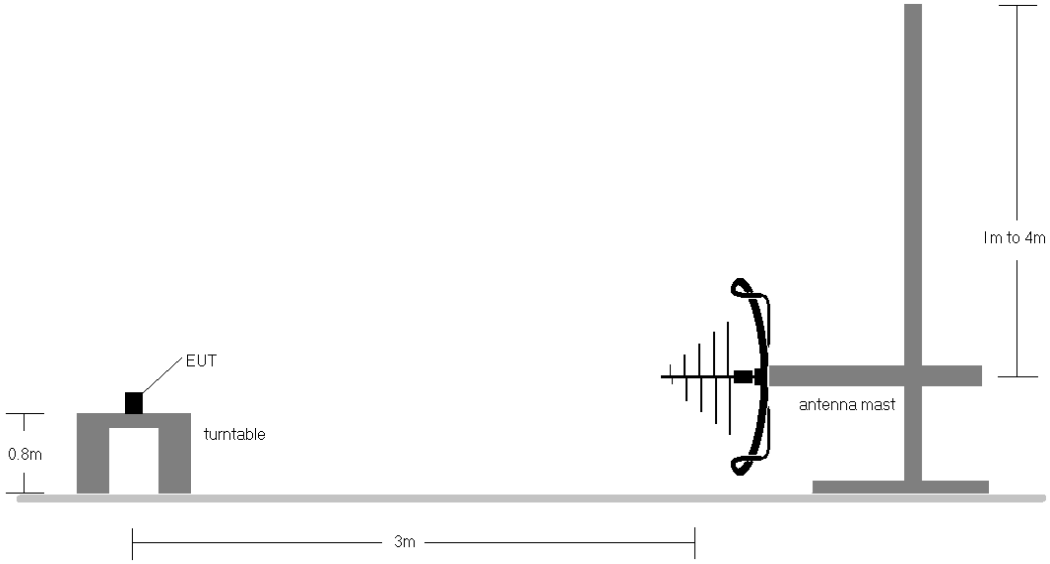

Figure 7-5. Test Instrument & Measurement Setup < 1GHz

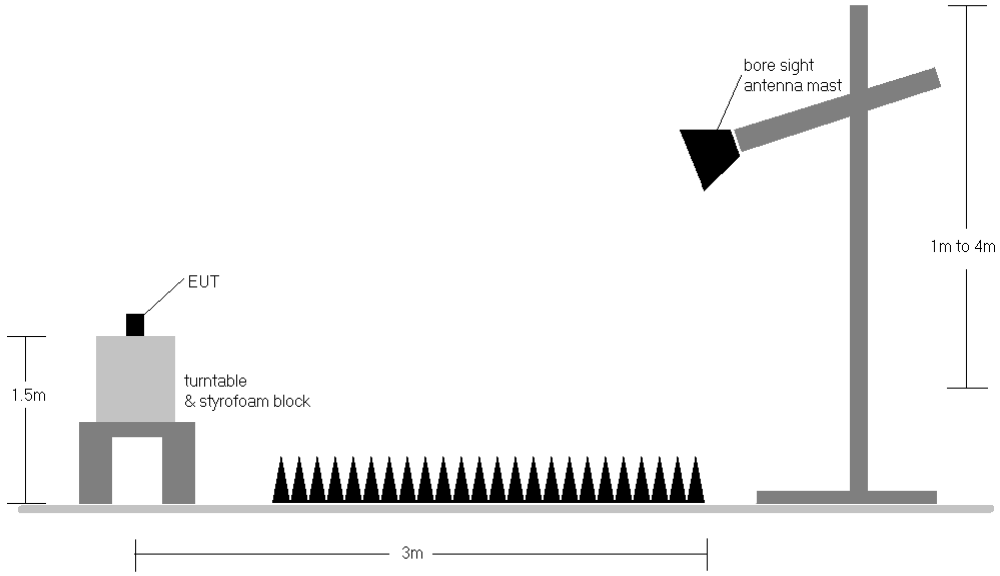

Figure 7-6. Test Instrument & Measurement Setup >1 GHz

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Test Notes

1) Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
   a) E(dBµV/m) = Measured amplitude level (dBm) + 107 + Cable Loss (dB) + Antenna Factor (dB/m)
   b) EIRP (dBm) = E(dBµV/m) + 20logD – 104.8; where D is the measurement distance in meters.

2) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.

3) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to “1”.

4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.

5) This unit was tested with its standard battery.

6) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.

7) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.

8) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

9) For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

10) Spurious emissions shown in this section are measured while operating in EN-DC mode with Sub 6GHz NR carrier as well as an LTE carrier (anchor). Spurious emissions from the NR carrier device, is subject to the rules under which the NR carrier operates. Spurious emission caused by the LTE carrier must meet the requirements of the rules under which the LTE carrier operates.

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

LTE Band 26/5

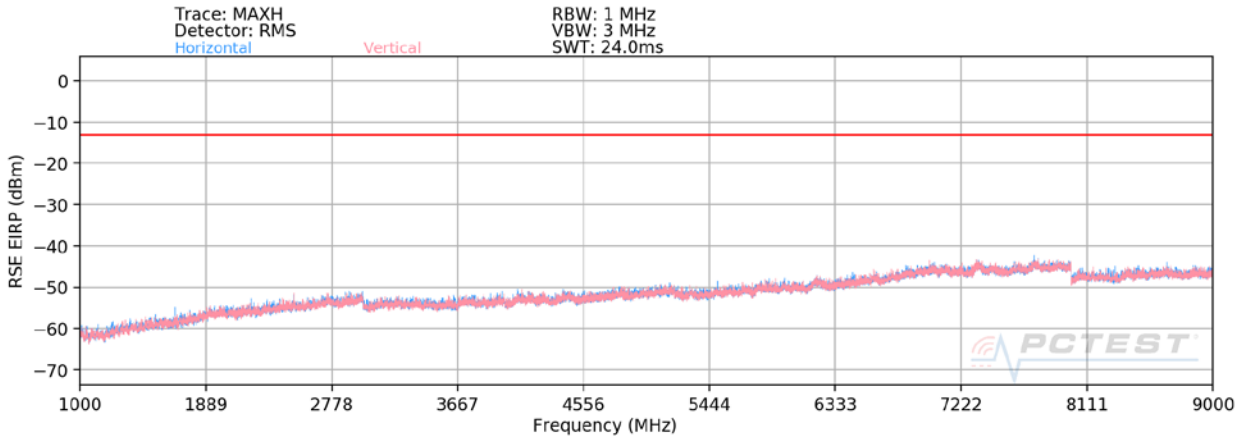

Plot 7-84. Radiated Spurious Plot (LTE Band 26/5)

Bandwidth (MHz):	10
Frequency (MHz):	829.0
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1658.0	V	-	-	-77.74	-0.22	29.04	-66.22	-13.00	-53.22
2487.0	V	177	183	-74.68	3.76	36.08	-59.18	-13.00	-46.18
3316.0	V	-	-	-78.37	4.72	33.35	-61.91	-13.00	-48.91
4145.0	V	-	-	-78.57	5.94	34.37	-60.89	-13.00	-47.89
4974.0	V	-	-	-79.16	6.91	34.75	-60.51	-13.00	-47.51

Table 7-6. Radiated Spurious Data (LTE Band 26/5 – Low Channel)

Bandwidth (MHz):	10
Frequency (MHz):	836.5
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.0	V	160	264	-74.18	-0.14	32.68	-62.58	-13.00	-49.58
2509.5	V	159	186	-74.09	4.03	36.94	-58.32	-13.00	-45.32
3346.0	V	-	-	-78.53	5.01	33.48	-61.77	-13.00	-48.77
4182.5	V	-	-	-78.65	6.10	34.45	-60.81	-13.00	-47.81
5019.0	V	-	-	-79.00	6.47	34.47	-60.79	-13.00	-47.79

Table 7-7. Radiated Spurious Data (LTE Band 26/5 – Mid Channel)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Bandwidth (MHz):	10
Frequency (MHz):	844.0
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1688.00	V	-	-	-78.32	-0.08	28.60	-66.66	-13.00	-53.66
2532.00	V	117	208	-73.57	3.69	37.12	-58.14	-13.00	-45.14
3376.00	V	-	-	-78.54	5.36	33.82	-61.43	-13.00	-48.43
4220.00	V	-	-	-78.65	5.78	34.13	-61.13	-13.00	-48.13
5064.00	V	-	-	-79.18	6.86	34.68	-60.58	-13.00	-47.58

Table 7-8. Radiated Spurious Data (LTE Band 26/5 – High Channel)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

NR Band n5

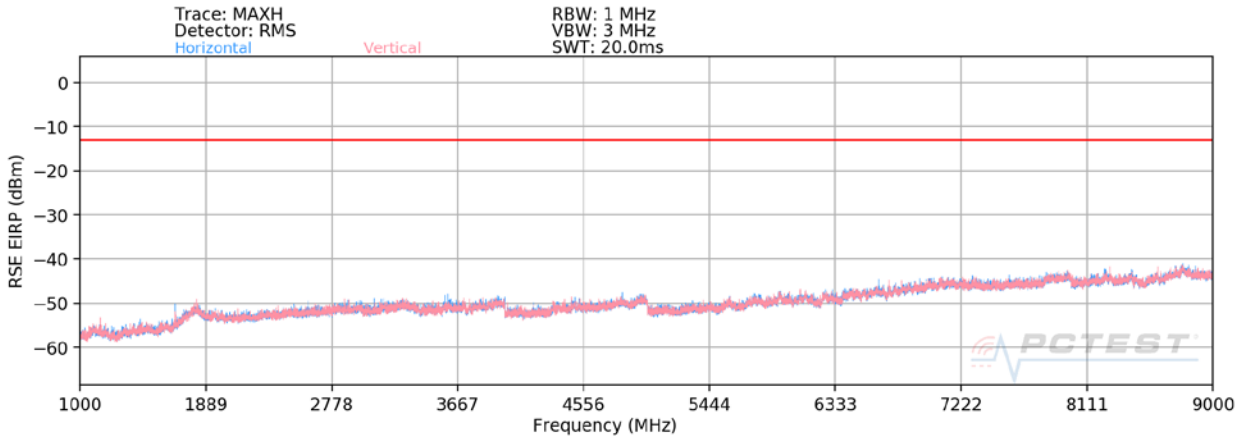

Plot 7-85. Radiated Spurious Plot (NR Band n5)

Bandwidth (MHz):	20
Frequency (MHz):	834.0
RB / Offset:	1 / 53
Mode:	Stand Alone

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1668.0	H	101	45	-71.34	2.50	38.16	-57.09	-13.00	-44.09
2502.0	H	153	134	-74.59	5.49	37.90	-57.35	-13.00	-44.35
3336.0	H	-	-	-80.05	7.55	34.50	-60.76	-13.00	-47.76
4170.0	H	-	-	-80.60	8.02	34.42	-60.84	-13.00	-47.84

Table 7-9. Radiated Spurious Data (NR Band n5 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	836.5
RB / Offset:	1 / 53
Mode:	Stand Alone

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.0	H	142	36	-69.49	2.72	40.23	-55.03	-13.00	-42.03
2509.5	H	105	125	-75.47	5.44	36.97	-58.28	-13.00	-45.28
3346.0	H	-	-	-80.26	7.52	34.26	-61.00	-13.00	-48.00
4182.5	H	-	-	-80.51	7.90	34.39	-60.87	-13.00	-47.87

Table 7-10. Radiated Spurious Data (NR Band n5 – Mid Channel)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Bandwidth (MHz):	20
Frequency (MHz):	839.0
RB / Offset:	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1678.0	H	10	49	-70.63	2.93	39.30	-55.95	-13.00	-42.95
2517.0	H	218	127	-75.80	5.54	36.74	-58.52	-13.00	-45.52
3356.0	H	-	-	-80.11	7.43	34.32	-60.93	-13.00	-47.93
4195.0	H	-	-	-80.45	8.07	34.62	-60.64	-13.00	-47.64

Table 7-11. Radiated Spurious Data (NR Band n5 – High Channel)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

EN-DC – n5 + LTE Band 66

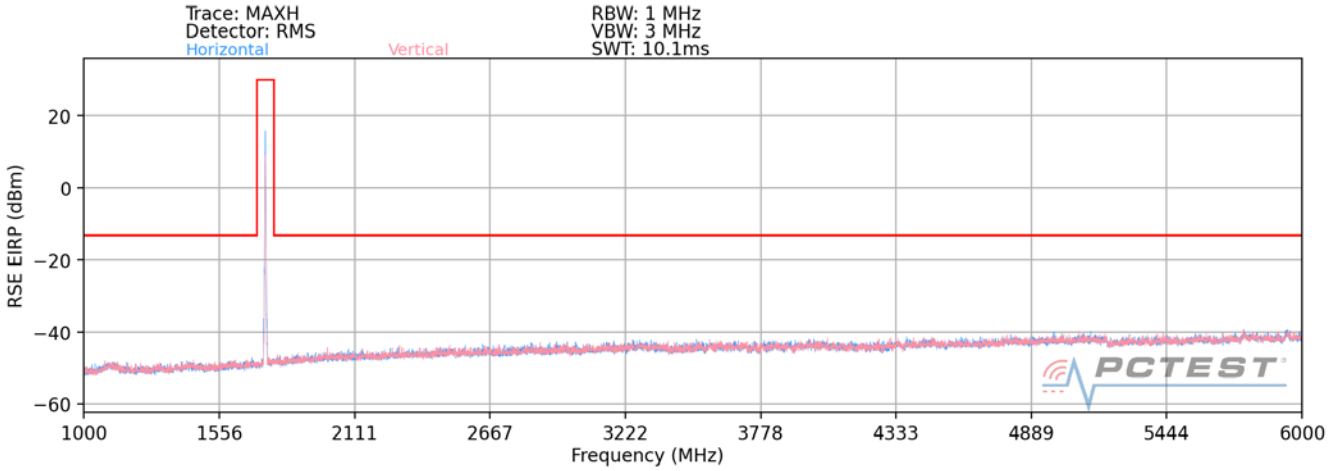

Plot 7-86. Radiated Spurious Plot (n5 + Anchor B66 – EN-DC)

Bandwidth (MHz):	20
Frequency (MHz):	836.5
RB / Offset:	1 / 53
Mode:	EN-DC
Anchor Band:	B66

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1889.0	H	-	-	-78.63	12.13	40.50	-54.75	-13.00	-41.75
2653.5	H	-	-	-79.15	14.65	42.50	-52.76	-13.00	-39.76
2797.5	H	-	-	-79.19	15.52	43.33	-51.93	-13.00	-38.93

Table 7-12. Radiated Spurious Data (n5 + Anchor B66 – EN-DC)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

GSM/GPRS Cell

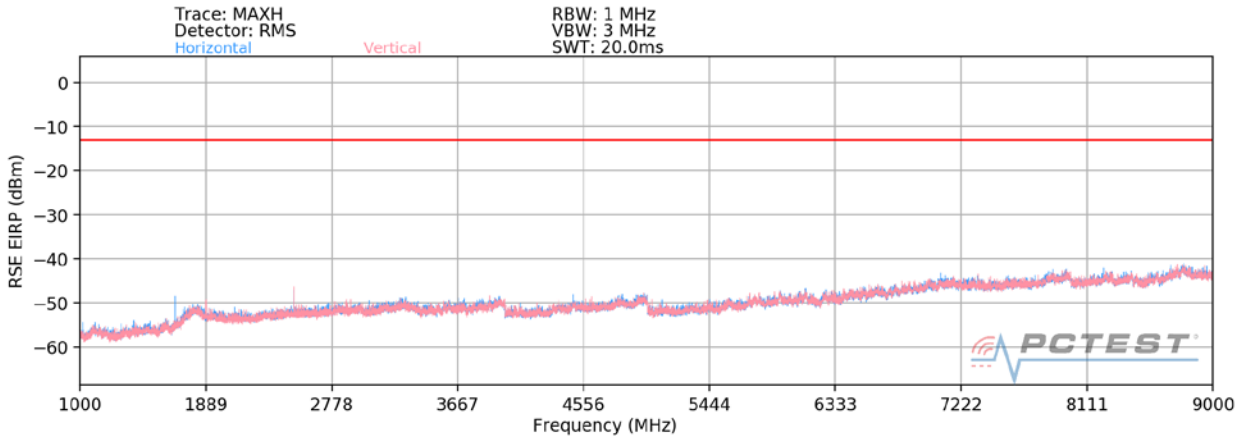

Plot 7-87. Radiated Spurious Plot (GPRS Cell)

Mode:	GPRS 1 Tx Slot
Channel:	128
Frequency (MHz):	824.2

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1648.4	H	365	40	-66.24	1.50	42.26	-53.00	-13.00	-40.00
2472.6	H	282	220	-61.87	5.81	50.94	-44.32	-13.00	-31.32
3296.8	H	-	-	-70.80	7.74	43.94	-51.32	-13.00	-38.32
4121.0	H	-	-	-71.16	8.28	44.12	-51.14	-13.00	-38.14

Table 7-13. Radiated Spurious Data (GPRS Cell – Low Channel)

Mode:	GPRS 1 Tx Slot
Channel:	190
Frequency (MHz):	836.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.2	H	161	33	-63.08	2.84	46.76	-48.50	-13.00	-35.50
2509.8	H	199	270	-63.64	5.54	48.90	-46.35	-13.00	-33.35
3346.4	H	-	-	-71.07	7.75	43.68	-51.58	-13.00	-38.58
4183.0	H	-	-	-71.10	7.92	43.82	-51.44	-13.00	-38.44

Table 7-14. Radiated Spurious Data (GPRS Cell – Mid Channel)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Mode:	GPRS 1 Tx Slot
Channel:	251
Frequency (MHz):	848.8

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1697.6	H	213	137	-63.56	3.78	47.22	-48.04	-13.00	-35.04
2546.4	H	357	112	-63.77	5.50	48.73	-46.53	-13.00	-33.53
3395.2	H	-	-	-70.44	6.91	43.47	-51.79	-13.00	-38.79
4244.0	H	-	-	-70.95	8.42	44.47	-50.79	-13.00	-37.79

Table 7-15. Radiated Spurious Data (GPRS Cell – High Channel)

© 2021 PCTEST V2.0 3/15/2021

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

WCDMA Cell

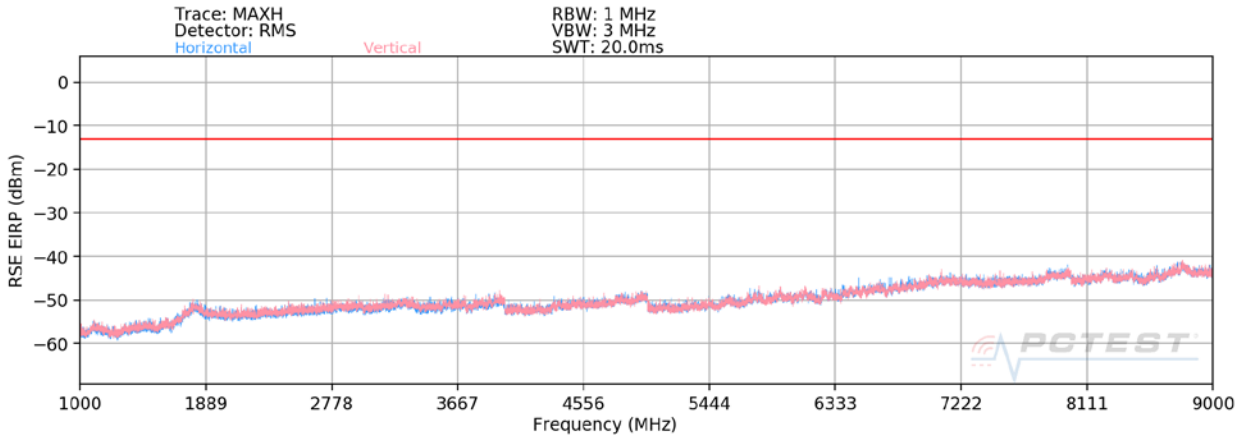

Plot 7-88. Radiated Spurious Plot (WCDMA Cell)

Mode:	WCDMA RMC
Channel:	4132
Frequency (MHz):	826.4

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1652.8	H	135	47	-76.79	1.74	31.95	-63.30	-13.00	-50.30
2479.2	H	115	228	-78.99	5.77	33.78	-61.48	-13.00	-48.48
3305.6	H	-	-	-80.10	7.60	34.50	-60.76	-13.00	-47.76
4132.0	H	-	-	-80.44	8.04	34.60	-60.66	-13.00	-47.66

Table 7-16. Radiated Spurious Data (WCDMA Cell – Low Channel)

Mode:	WCDMA RMC
Channel:	4183
Frequency (MHz):	836.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.2	H	100	44	-76.49	2.84	33.35	-61.91	-13.00	-48.91
2509.8	H	200	226	-77.80	5.54	34.74	-60.51	-13.00	-47.51
3346.4	H	-	-	-80.15	7.75	34.60	-60.66	-13.00	-47.66
4183.0	H	-	-	-80.51	7.92	34.41	-60.85	-13.00	-47.85

Table 7-17. Radiated Spurious Data (WCDMA Cell – Mid Channel)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

Mode:	WCDMA RMC
Channel:	4233
Frequency (MHz):	846.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1693.2	H	147	40	-77.05	3.63	33.58	-61.67	-13.00	-48.67
2539.8	H	-	-	-79.25	5.62	33.37	-61.89	-13.00	-48.89
3386.4	H	-	-	-79.99	7.08	34.09	-61.17	-13.00	-48.17
4233.0	H	-	-	-80.83	8.42	34.59	-60.67	-13.00	-47.67

Table 7-18. Radiated Spurious Data (WCDMA Cell – High Channel)

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.7 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22 and RSS-132, the frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

LTE Band 26/5

Operating Frequency (Hz):	836,500,000
Ref. Voltage (VDC):	4.31
Deviation Limit:	± 0.00025% or 2.5 ppm

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.31	- 30	829,844,603	1,577	0.0001900
		- 20	829,842,332	-694	-0.0000836
		- 10	829,844,657	1,631	0.0001965
		0	829,842,300	-726	-0.0000875
		+ 10	829,841,045	-1,981	-0.0002387
		+ 20 (Ref)	829,843,026	0	0.0000000
		+ 30	829,841,311	-1,715	-0.0002067
		+ 40	829,841,563	-1,463	-0.0001763
		+ 50	829,841,876	-1,150	-0.0001386
Battery Endpoint	3.42	+ 20	829,842,776	-250	-0.0000302

Table 7-19. LTE Band 26/5 Frequency Stability Data

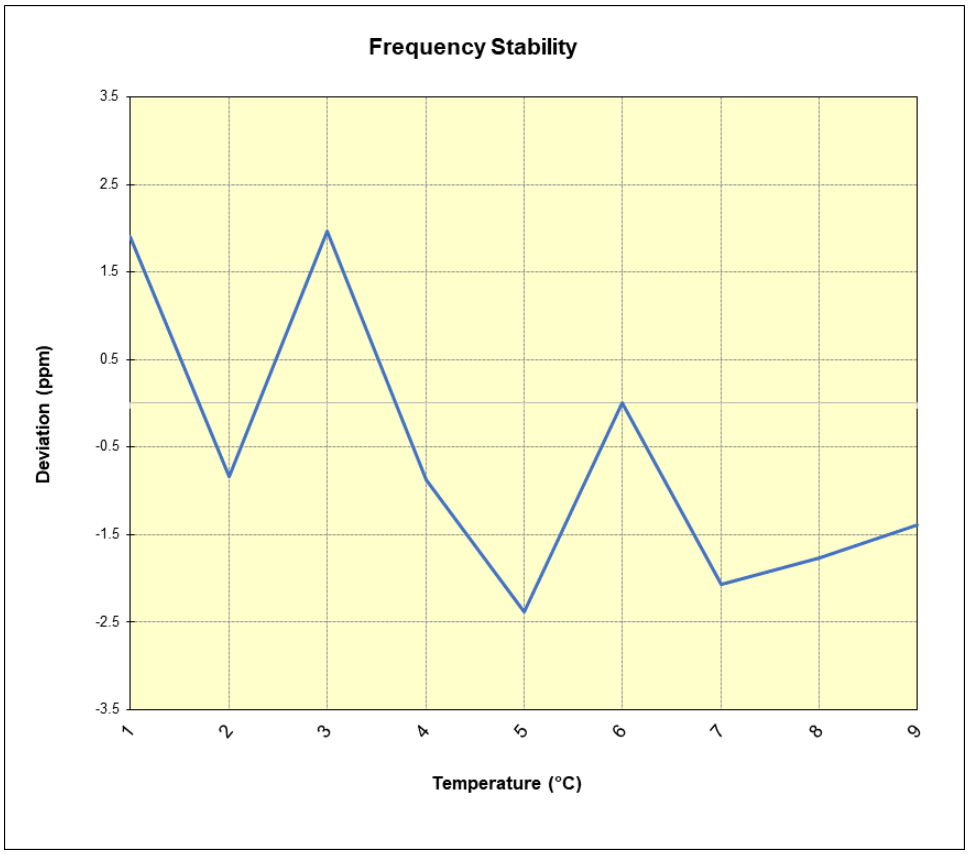

Plot 7-89. LTE Band 26/5 Frequency Stability Chart

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

NR Band n5

Operating Frequency (Hz):	836,500,000
Ref. Voltage (VDC):	4.31
Deviation Limit:	± 0.00025% or 2.5 ppm

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.31	- 30	827,047,269	-1,121	-0.0001356
		- 20	827,046,572	-1,819	-0.0002199
		- 10	827,047,808	-582	-0.0000704
		0	827,049,290	899	0.0001087
		+ 10	827,048,059	-332	-0.0000401
		+ 20 (Ref)	827,048,391	0	0.0000000
		+ 30	827,048,404	13	0.0000016
		+ 40	827,048,300	-90	-0.0000109
		+ 50	827,048,356	-35	-0.0000042
Battery Endpoint	3.42	+ 20	827,048,429	38	0.0000046

Table 7-20. NR Band n5 Frequency Stability Data

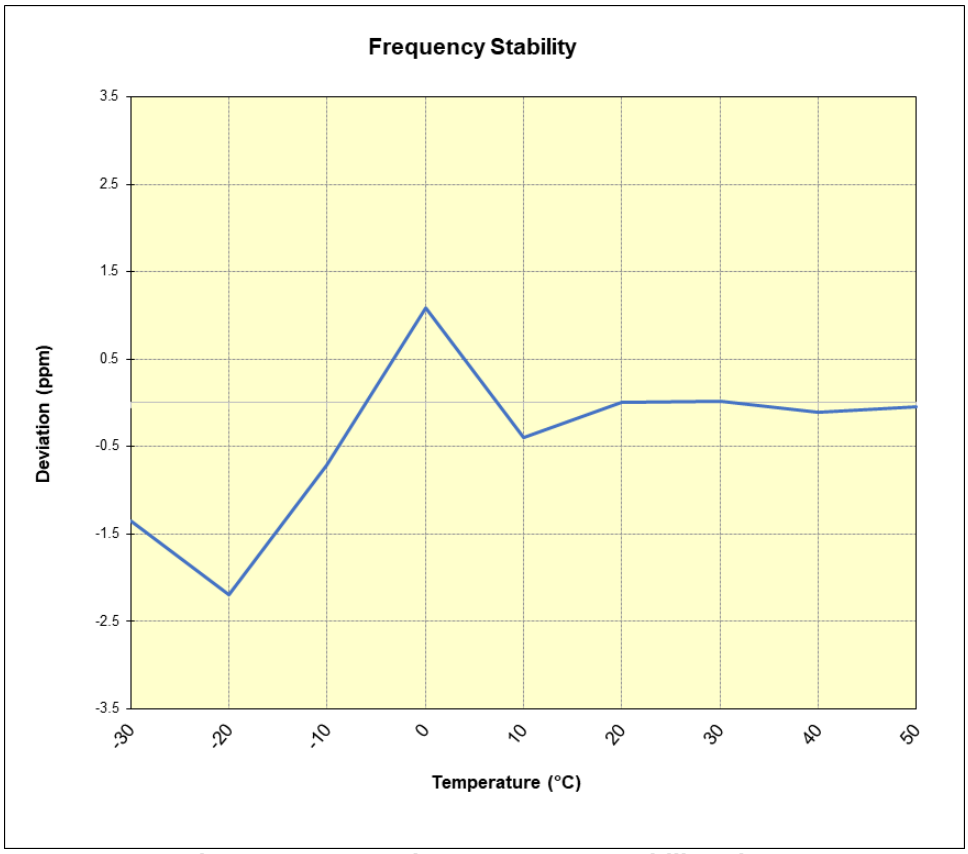

Plot 7-90. NR Band n5 Frequency Stability Chart

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

GSM/GPRS Cellular

Operating Frequency (Hz):	836,400,000
Ref. Voltage (VDC):	4.31
Deviation Limit:	± 0.00025% or 2.5 ppm

Voltage (%)	Power (VDC)	Temp (°C)	WS	Freq. Dev. (Hz)	Deviation (%)
100 %	4.31	- 30	836,397,868	1,119	0.0001337
		- 20	836,396,095	-655	-0.0000783
		- 10	836,397,595	846	0.0001011
		0	836,398,812	2,063	0.0002466
		+ 10	836,396,619	-131	-0.0000156
		+ 20 (Ref)	836,396,749	0	0.0000000
		+ 30	836,396,387	-363	-0.0000434
		+ 40	836,396,906	156	0.0000187
		+ 50	836,396,745	-5	-0.0000006
Battery Endpoint	3.42	+ 20	836,396,572	-177	-0.0000212

Table 7-21. GSM/GPRS Cell Frequency Stability Data

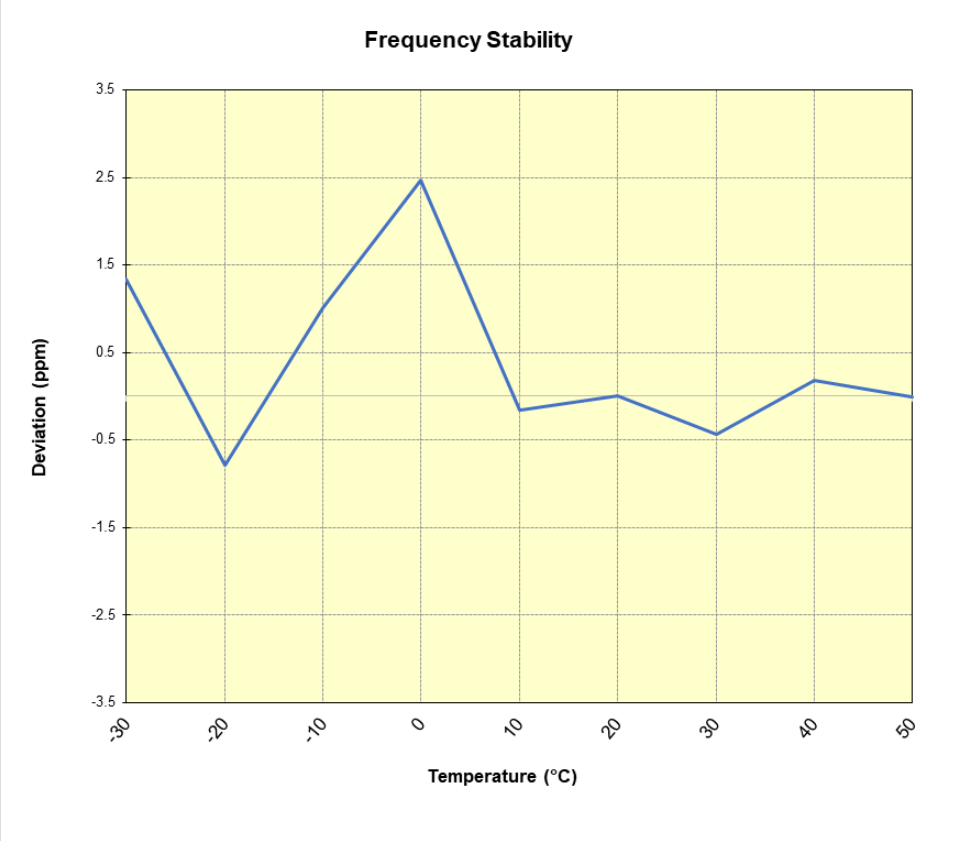

Plot 7-91. GSM/GPRS Cell Frequency Stability Chart

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

WCDMA Cellular

Operating Frequency (Hz):	836,600,000
Ref. Voltage (VDC):	4.31
Deviation Limit:	± 0.00025% or 2.5 ppm

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.31	- 30	836,593,308	-1,378	-0.0001647
		- 20	836,594,329	-357	-0.0000427
		- 10	836,596,059	1,372	0.0001640
		0	836,594,062	-625	-0.0000747
		+ 10	836,596,669	1,983	0.0002371
		+ 20 (Ref)	836,594,686	0	0.0000000
		+ 30	836,596,341	1,655	0.0001978
		+ 40	836,594,969	283	0.0000338
		+ 50	836,595,288	602	0.0000720
Battery Endpoint	3.42	+ 20	836,594,224	-463	-0.0000553

Table 7-22. WCDMA Cell Frequency Stability Data

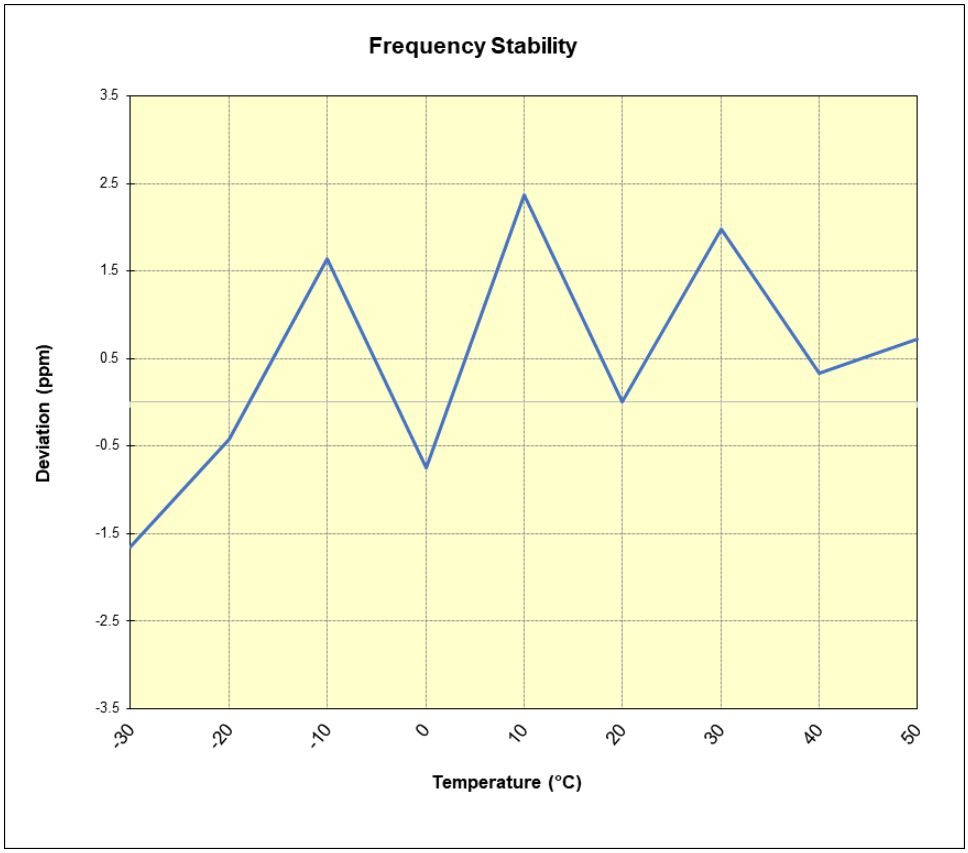

Plot 7-92. WCDMA Cell Frequency Stability Chart

© 2021 PCTEST V2.0 3/15/2021
All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the Samsung **Portable Handset FCC ID: A3LSMA528B** complies with all the requirements of Part 22 of the FCC rules.

© 2021 PCTEST V2.0 3/15/2021

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.