



PART 27 MEASUREMENT REPORT

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

4/12/2021 – 6/11/2021

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M2107290086-06.A3L

FCC ID:

A3LSMF711U1

Applicant Name:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-F711U

Additional Model(s):

SM-F711U1

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part:


27

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01
v03r01, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President



FCC ID: A3LSMF711U1	 PART 27 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset
Page 1 of 169		


T A B L E O F C O N T E N T S

1.0	INTRODUCTION	5
1.1	Scope	5
1.2	PCTEST Test Location.....	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION.....	6
2.1	Equipment Description	6
2.2	Device Capabilities.....	6
2.3	Test Configuration	6
2.4	EMI Suppression Device(s)/Modifications	6
3.0	DESCRIPTION OF TESTS	7
3.1	Evaluation Procedure	7
3.2	Radiated Power and Radiated Spurious Emissions	7
4.0	MEASUREMENT UNCERTAINTY	8
5.0	TEST EQUIPMENT CALIBRATION DATA	9
6.0	SAMPLE CALCULATIONS	10
7.0	TEST RESULTS	11
7.1	Summary	11
7.2	Conducted Power Output Data	13
7.3	Occupied Bandwidth	15
7.4	Spurious and Harmonic Emissions at Antenna Terminal	57
7.5	Band Edge Emissions at Antenna Terminal	87
7.6	Uplink Carrier Aggregation	122
7.7	Radiated Power (EIRP)	138
7.8	Radiated Spurious Emissions Measurements	144
7.9	Frequency Stability / Temperature Variation	163
8.0	CONCLUSION.....	169

FCC ID: A3LSMF711U1	 PART 27 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset
		Page 2 of 169



PART 27 MEASUREMENT REPORT



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
LTE Band 30	10 MHz	QPSK	2310.0	0.194	22.88	9M04G7D
		16QAM	2310.0	0.157	21.96	8M97W7D
	5 MHz	QPSK	2307.5 - 2312.5	0.192	22.83	4M51G7D
		16QAM	2307.5 - 2312.5	0.150	21.75	4M50W7D
LTE Band 7	20 MHz	QPSK	2510.0 - 2560.0	0.259	24.13	18M0G7D
		16QAM	2510.0 - 2560.0	0.238	23.76	18M0W7D
	15 MHz	QPSK	2507.5 - 2562.5	0.259	24.13	13M5G7D
		16QAM	2507.5 - 2562.5	0.245	23.89	13M5W7D
	10 MHz	QPSK	2505.0 - 2565.0	0.263	24.21	9M04G7D
		16QAM	2505.0 - 2565.0	0.235	23.71	9M01W7D
	5 MHz	QPSK	2502.5 - 2567.5	0.268	24.27	4M51G7D
		16QAM	2502.5 - 2567.5	0.238	23.77	4M52W7D
LTE Band 41(PC2)	20 MHz	QPSK	2506.0 - 2680.0	0.604	27.81	18M0G7D
		16QAM	2506.0 - 2680.0	0.531	27.25	17M9W7D
	15 MHz	QPSK	2503.5 - 2682.5	0.593	27.73	13M5G7D
		16QAM	2503.5 - 2682.5	0.529	27.23	13M5W7D
	10 MHz	QPSK	2501.0 - 2685.0	0.599	27.77	9M00G7D
		16QAM	2501.0 - 2685.0	0.540	27.32	9M00W7D
	5 MHz	QPSK	2498.5 - 2687.5	0.603	27.80	4M52G7D
		16QAM	2498.5 - 2687.5	0.542	27.34	4M51W7D
LTE Band 41(PC3)/38	20 MHz	QPSK	2506.0 - 2680.0	0.350	25.44	18M0G7D
		16QAM	2506.0 - 2680.0	0.330	25.18	17M9W7D
	15 MHz	QPSK	2503.5 - 2682.5	0.348	25.41	13M5G7D
		16QAM	2503.5 - 2682.5	0.324	25.11	13M5W7D
	10 MHz	QPSK	2501.0 - 2685.0	0.350	25.44	9M04G7D
		16QAM	2501.0 - 2685.0	0.335	25.25	9M00W7D
	5 MHz	QPSK	2498.5 - 2687.5	0.352	25.46	4M52G7D
		16QAM	2498.5 - 2687.5	0.331	25.20	4M51W7D
NR Band n30	10 MHz	$\pi/2$ BPSK	2310.0	0.198	22.96	8M99G7D
		QPSK	2310.0	0.193	22.85	9M35G7D
		16QAM	2310.0	0.169	22.27	9M34W7D
	5 MHz	$\pi/2$ BPSK	2307.5 - 2312.5	0.196	22.92	4M52G7D
		QPSK	2307.5 - 2312.5	0.189	22.76	4M52G7D
		16QAM	2307.5 - 2312.5	0.164	22.14	4M55W7D
NR Band n41 PC2	100 MHz	$\pi/2$ BPSK	2546.0 - 2640.0	0.381	25.81	96M8G7D
		QPSK	2546.0 - 2640.0	0.364	25.61	98M0G7D
		16QAM	2546.0 - 2640.0	0.250	23.98	98M1W7D
	90 MHz	$\pi/2$ BPSK	2541.0 - 2645.0	0.345	25.38	87M4G7D
		QPSK	2541.0 - 2645.0	0.289	24.61	87M8G7D
		16QAM	2541.0 - 2645.0	0.196	22.92	87M9W7D
	80 MHz	$\pi/2$ BPSK	2536.0 - 2650.0	0.336	25.26	77M6G7D
		QPSK	2536.0 - 2650.0	0.318	25.03	77M8G7D
		16QAM	2536.0 - 2650.0	0.214	23.31	77M9W7D
	60 MHz	$\pi/2$ BPSK	2526.0 - 2660.0	0.381	25.81	58M3G7D
		QPSK	2526.0 - 2660.0	0.364	25.61	58M2G7D
		16QAM	2526.0 - 2660.0	0.250	23.98	58M3W7D
	50 MHz	$\pi/2$ BPSK	2521.0 - 2665.0	0.375	25.74	46M2G7D
		QPSK	2521.0 - 2665.0	0.321	25.06	47M7G7D
		16QAM	2521.0 - 2665.0	0.232	23.65	47M7W7D
	40 MHz	$\pi/2$ BPSK	2516.0 - 2670.0	0.282	24.50	35M8G7D
		QPSK	2516.0 - 2670.0	0.268	24.28	37M9G7D
		16QAM	2516.0 - 2670.0	0.172	22.35	38M0W7D
	30 MHz	$\pi/2$ BPSK	2511.0 - 2675.0	0.304	24.83	27M0G7D
		QPSK	2511.0 - 2675.0	0.277	24.42	28M0G7D
		16QAM	2511.0 - 2675.0	0.177	22.47	28M0W7D
	20 MHz	$\pi/2$ BPSK	2506.0 - 2680.0	0.372	25.71	22M9G7D
		QPSK	2506.0 - 2680.0	0.326	25.14	23M2G7D
		16QAM	2506.0 - 2680.0	0.209	23.21	23M3W7D

EUT Overview

FCC ID: A3LSMF711U1	 PART 27 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset
		Page 3 of 169

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n41 PC3	100 MHz	$\pi/2$ BPSK	2546.0 - 2640.0	0.205	23.11	97M1G7D
		QPSK	2546.0 - 2640.0	0.200	23.01	97M8G7D
		16QAM	2546.0 - 2640.0	0.155	21.90	97M8W7D
	90 MHz	$\pi/2$ BPSK	2541.0 - 2645.0	0.189	22.76	87M2G7D
		QPSK	2541.0 - 2645.0	0.201	23.02	88M0G7D
		16QAM	2541.0 - 2645.0	0.127	21.05	88M1W7D
	80 MHz	$\pi/2$ BPSK	2536.0 - 2650.0	0.190	22.78	77M3G7D
		QPSK	2536.0 - 2650.0	0.216	23.34	77M6G7D
		16QAM	2536.0 - 2650.0	0.133	21.23	77M9W7D
	60 MHz	$\pi/2$ BPSK	2526.0 - 2660.0	0.205	23.11	58M3G7D
		QPSK	2526.0 - 2660.0	0.200	23.01	58M3G7D
		16QAM	2526.0 - 2660.0	0.155	21.90	58M1W7D
	50 MHz	$\pi/2$ BPSK	2521.0 - 2665.0	0.198	22.98	46M0G7D
		QPSK	2521.0 - 2665.0	0.207	23.15	47M6G7D
		16QAM	2521.0 - 2665.0	0.144	21.58	48M0W7D
	40 MHz	$\pi/2$ BPSK	2516.0 - 2670.0	0.149	21.74	35M8G7D
		QPSK	2516.0 - 2670.0	0.147	21.68	37M9G7D
		16QAM	2516.0 - 2670.0	0.106	20.27	37M9W7D
	30 MHz	$\pi/2$ BPSK	2511.0 - 2675.0	0.162	22.09	26M9G7D
		QPSK	2511.0 - 2675.0	0.152	21.82	26M9G7D
		16QAM	2511.0 - 2675.0	0.109	20.39	26M9W7D
	20 MHz	$\pi/2$ BPSK	2506.0 - 2680.0	0.197	22.95	17M9G7D
		QPSK	2506.0 - 2680.0	0.179	22.54	18M3G7D
		16QAM	2506.0 - 2680.0	0.130	21.13	18M3W7D

EUT Overview

FCC ID: A3LSMF711U1	 PART 27 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset
		Page 4 of 169

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISSED.

FCC ID: A3LSMF711U1	 PART 27 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset
Page 5 of 169		

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMF711U1**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27.

Test Device Serial No.: 0859M, 0123M, 0846M, 0834M, 0129M, 0130M, 1964M, 0151M, 0811M, 0880M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (n71, n12, n5, n66, n2, n25, n30, n41, n77, n260, n261), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer.

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

This device supports two configurations: one is with screen open, and one is with screen closed. Both configurations are tested, and the worst case radiated emissions data is shown in this report.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMF711U1	 PART 27 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset
Page 6 of 169		

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI/TIA-603-E-2016. A half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: A3LSMF711U1	 PART 27 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset
Page 7 of 169		

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMF711U1	 PART 27 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset
		Page 8 of 169

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2	EMC Cable and Switch System	9/9/2020	Annual	9/9/2021	AP2
-	AP1	EMC Cable and Switch System	9/10/2020	Annual	9/10/2021	AP1
-	LTx2	Licensed Transmitter Cable Set	9/16/2020	Annual	9/16/2021	LTx2
-	LTx5	Licensed Transmitter Cable Set	9/16/2020	Annual	9/16/2021	LTx5
Agilent	E5515C	Wireless Communications Test Set	N/A			GB45360985
Agilent	E5515C	Wireless Communications Test Set	N/A			GB46310798
Anritsu	MT8820C	Radio Communication Analyzer	N/A			6201300731
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6201381794
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6200901190
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/12/2020	Biennial	3/12/2022	128337
Keysight Technologies	N9020A	MXA Signal Analyzer	9/22/2020	Annual	9/22/2021	MY54500644
Keysight Technologies	N9020A	MXA Signal Analyzer	8/14/2020	Annual	8/14/2021	US46470561
Keysight Technologies	N9038A	MXE EMI Receiver	8/11/2020	Annual	8/11/2021	MY51210133
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	8/17/2020	Annual	8/17/2021	MY52350166
Keysight Technologies	N9030B	PXA Signal Analyzer, Multi-touch	9/17/2020	Annual	9/17/2021	MY57141001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11403100002
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			100976
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	7/15/2020	Annual	7/15/2021	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/9/2020	Annual	9/9/2021	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/10/2020	Annual	8/10/2021	103200
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307

Table 5-1. Test Equipment

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMF711U1	 PART 27 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset	Page 9 of 169

6.0 SAMPLE CALCULATIONS

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: A3LSMF711U1	 PART 27 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset
Page 10 of 169		

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMF711U1
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE/NR/ULCA

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Conducted Power	2.1046	N/A	PASS	Sections 7.2, 7.6
	Occupied Bandwidth	2.1049	N/A	PASS	Section 7.3
	Conducted Band Edge / Spurious Emissions (LTE Band 30)	2.1051, 27.53(a)	Undesirable emissions must meet the limits detailed in 27.53(a)	PASS	Sections 7.4, 7.5
	Conducted Band Edge / Spurious Emissions (NR Band n30)			PASS	Sections 7.4, 7.5
	Conducted Band Edge / Spurious Emissions (LTE Band 7)	2.1051, 27.53(m)	Undesirable emissions must meet the limits detailed in 27.53(m)	PASS	Sections 7.4, 7.5
	Conducted Band Edge / Spurious Emissions (LTE Band 41)			PASS	Sections 7.4, 7.5, 7.6
	Conducted Band Edge / Spurious Emissions (NR Band n41)			PASS	Sections 7.4, 7.5
	Conducted Band Edge / Spurious Emissions (LTE Band 38)			PASS	Sections 7.4, 7.5
	Transmitter Conducted Output Power	2.1046	N/A	PASS	See RF Exposure Report
	Frequency Stability	2.1055, 27.54	Fundamental emissions stay within authorized frequency block	PASS	Section 7.9
RADIATED	Effective Radiated Power / Equivalent Isotropic Radiated Power (LTE Band 30)	27.50(a)(3)	< 0.25 Watts max. EIRP	PASS	Section 7.7
	Effective Radiated Power / Equivalent Isotropic Radiated Power (NR Band n30)			PASS	Section 7.7
	Effective Radiated Power / Equivalent Isotropic Radiated Power (LTE Band 7)	27.50(h)(2)	< 2 Watts max. EIRP	PASS	Section 7.7
	Effective Radiated Power / Equivalent Isotropic Radiated Power (LTE Band 41)			PASS	Section 7.7
	Effective Radiated Power / Equivalent Isotropic Radiated Power (NR Band n41)			PASS	Section 7.7
	Effective Radiated Power / Equivalent Isotropic Radiated Power (LTE Band 38)			PASS	Section 7.7
	Radiated Spurious Emissions (LTE Band 30)	2.1053, 27.53(a)	> 70 + 10log10(P[Watts])	PASS	Section 7.8
	Radiated Spurious Emissions (NR Band n30)			PASS	Section 7.8
	Radiated Spurious Emissions (LTE Band 7)	2.1053, 27.53(m)	Undesirable emissions must meet the limits detailed in 27.53(m)	PASS	Section 7.8
	Radiated Spurious Emissions (LTE Band 41)			PASS	Section 7.8
	Radiated Spurious Emissions (NR Band n41)			PASS	Section 7.8
	Radiated Spurious Emissions (LTE Band 38)			PASS	Section 7.8

Table 7-1. Summary of Test Results

FCC ID: A3LSMF711U1	 PART 27 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021 EUT Type: Portable Handset	Page 11 of 169

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST EMC Software Tool v1.0.

FCC ID: A3LSMF711U1	 PART 27 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset	Page 12 of 169

7.2 Conducted Power Output Data

§2.1046

Test Overview

The EUT is set up to transmit at maximum power for LTE. All power levels are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

A-MPR is implemented in this device per the A-MPR specification in 3GPP TS 36.101. The conducted powers are shown herein to cover the different A-MPR levels specified in the standard. Measurement equipment was set up with triggering/gating on the spectrum analyzer such that powers were measured only during the on-time of the signal.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Span = 2 x OBW to 3 x OBW
2. RBW = 1% to 5% of the OBW
3. Number of measurement points in sweep $\geq 2 \times \text{span} / \text{RBW}$
4. Sweep = auto-couple (less than transmission burst duration)
5. Detector = RMS (power)
6. Trigger was set to enable power measurements only on full power bursts
7. Trace was allowed to stabilize
8. Spectrum analyzer's "Channel Power" function was used to compute the power by integrating the spectrum across the OBW of the signal

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

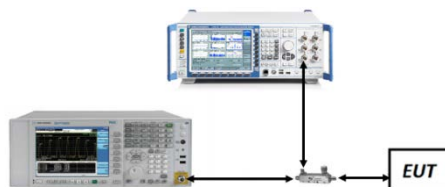


Figure 7-1. Test Instrument & Measurement Setup

FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 13 of 169

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	$\pi/2$ BPSK	509202	2546.0	1 / 136	27.59
	QPSK	509202	2546.0	1 / 136	27.12
		518598	2593.0	1 / 68	26.79
		528000	2640.0	1 / 136	27.26
	16-QAM	528000	2640.0	1 / 136	26.55
	64-QAM	528000	2640.0	1 / 136	24.87
	256-QAM	528000	2640.0	1 / 136	23.19
90 MHz	$\pi/2$ BPSK	508200	2541.0	1 / 122	27.76
	QPSK	508200	2541.0	1 / 122	27.48
		518592	2593.0	1 / 61	26.14
		529002	2645.0	1 / 122	26.26
	16-QAM	508200	2541.0	1 / 122	27.01
	64-QAM	508200	2541.0	1 / 122	25.59
	256-QAM	508200	2541.0	1 / 122	23.69
80 MHz	$\pi/2$ BPSK	507204	2536.0	1 / 108	27.73
	QPSK	507204	2536.0	1 / 108	27.74
		518598	2593.0	1 / 54	25.81
		529998	2650.0	1 / 108	26.68
	16-QAM	507204	2536.0	1 / 108	26.97
	64-QAM	507204	2536.0	1 / 108	25.52
	256-QAM	507204	2536.0	1 / 108	23.76
60 MHz	$\pi/2$ BPSK	505200	2526.0	1 / 81	27.75
	QPSK	505200	2526.0	1 / 81	27.12
		518598	2593.0	1 / 40	26.79
		531996	2660.0	1 / 81	27.26
	16-QAM	531996	2660.0	1 / 81	26.55
	64-QAM	531996	2660.0	1 / 81	24.87
	256-QAM	505200	2526.0	1 / 81	23.82
50 MHz	$\pi/2$ BPSK	504204	2521.0	1 / 66	27.77
	QPSK	504204	2521.0	1 / 66	27.61
		518598	2593.0	1 / 33	26.86
		532998	2665.0	1 / 66	26.71
	16-QAM	504204	2521.0	1 / 66	26.89
	64-QAM	504204	2521.0	1 / 66	25.39
	256-QAM	504204	2521.0	1 / 66	23.99
40 MHz	$\pi/2$ BPSK	534000	2670.0	1 / 53	26.43
	QPSK	503202	2516.0	1 / 53	25.86
		518598	2593.0	1 / 26	24.87
		534000	2670.0	1 / 53	25.93
	16-QAM	534000	2670.0	1 / 53	24.92
	64-QAM	534000	2670.0	1 / 53	23.61
	256-QAM	534000	2670.0	1 / 53	22.63
30 MHz	$\pi/2$ BPSK	502203	2511.0	1 / 39	27.24
	QPSK	502203	2511.0	1 / 39	26.05
		518598	2593.0	1 / 19	25.16
		534999	2675.0	1 / 39	26.07
	16-QAM	534999	2675.0	1 / 39	25.04
	64-QAM	534999	2675.0	1 / 39	23.79
	256-QAM	534999	2675.0	1 / 39	22.76
20 MHz	$\pi/2$ BPSK	535998	2680.0	1 / 25	27.64
	QPSK	501204	2506.0	1 / 25	26.12
		518598	2593.0	1 / 13	25.39
		535998	2680.0	1 / 25	26.79
	16-QAM	535998	2680.0	1 / 25	25.78
	64-QAM	535998	2680.0	1 / 25	24.24
	256-QAM	535998	2680.0	1 / 25	23.17

Table 7-2. Conducted Power Output Data (n41 PC2)

FCC ID: A3LSMF711U1	 PART 27 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset
© 2021 PCTEST		Page 14 of 169

V2.0 3/28/2021

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


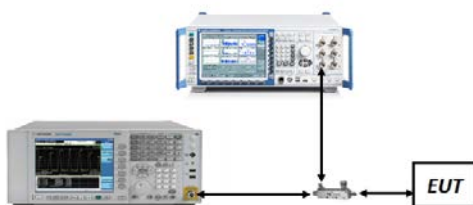


Figure 7-2. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: A3LSMF711U1	 PART 27 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset

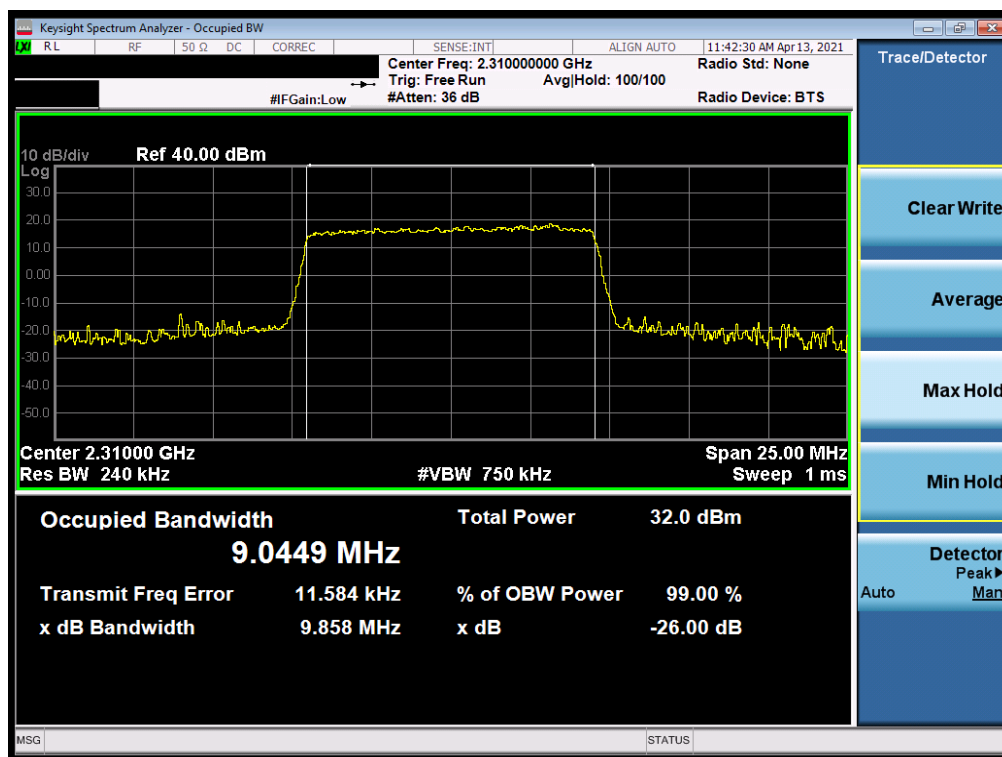


Plot 7-1. Occupied Bandwidth Plot (LTE Band 30 - 10MHz QPSK - Full RB)

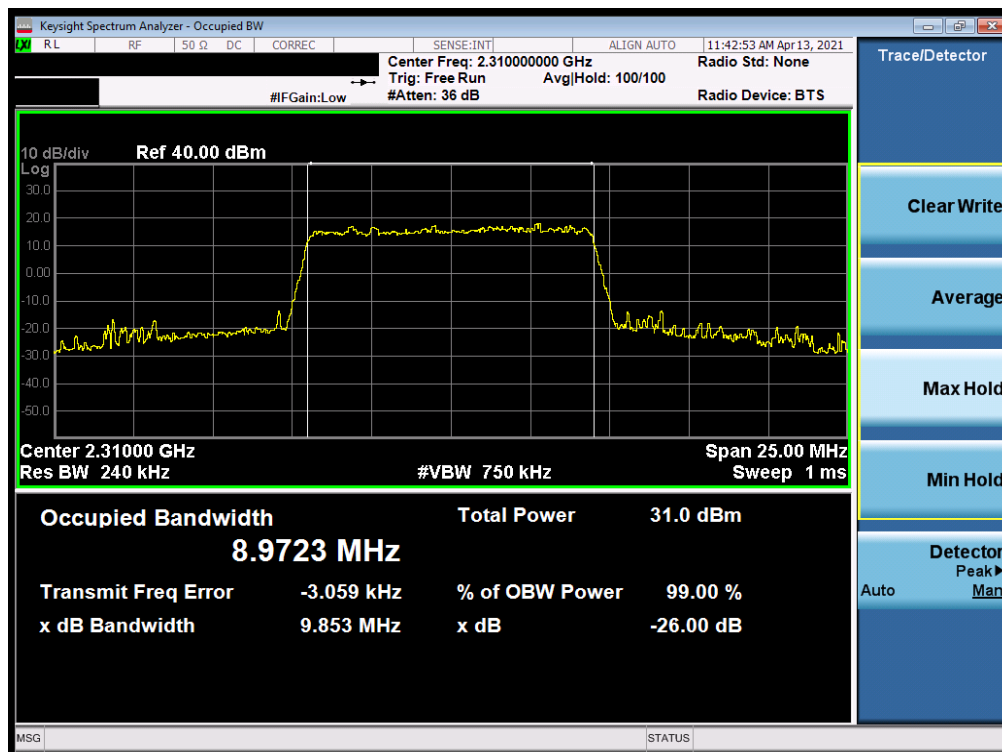


Plot 7-2. Occupied Bandwidth Plot (LTE Band 30 - 10MHz 16-QAM - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 16 of 169

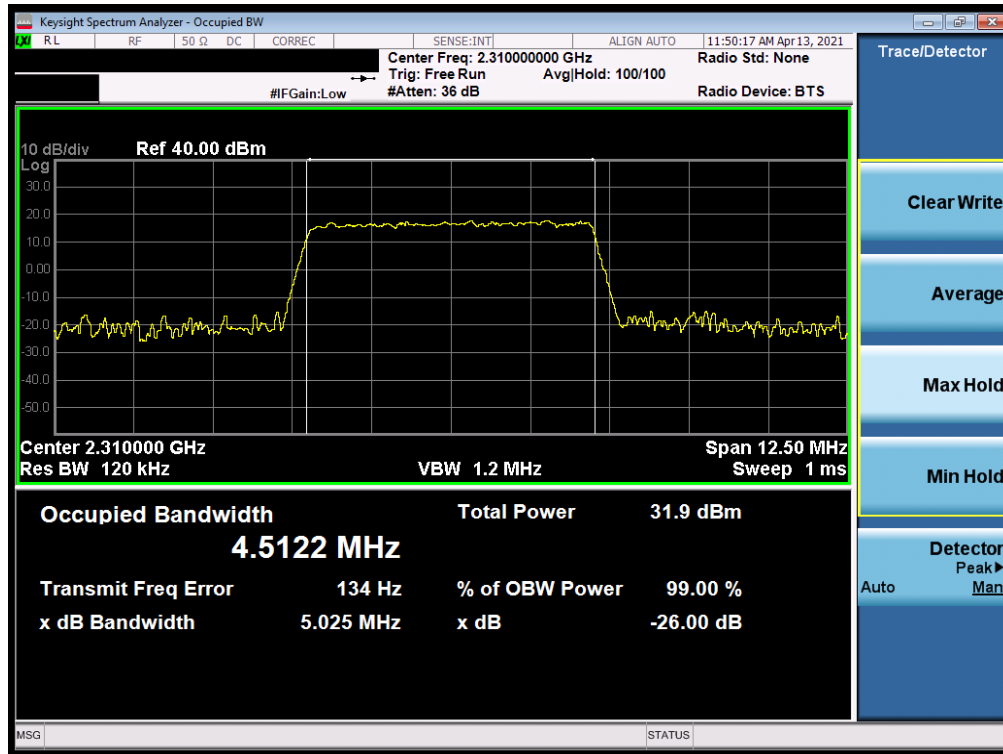

Plot 7-3. Occupied Bandwidth Plot (LTE Band 30 - 5MHz QPSK - Full RB)

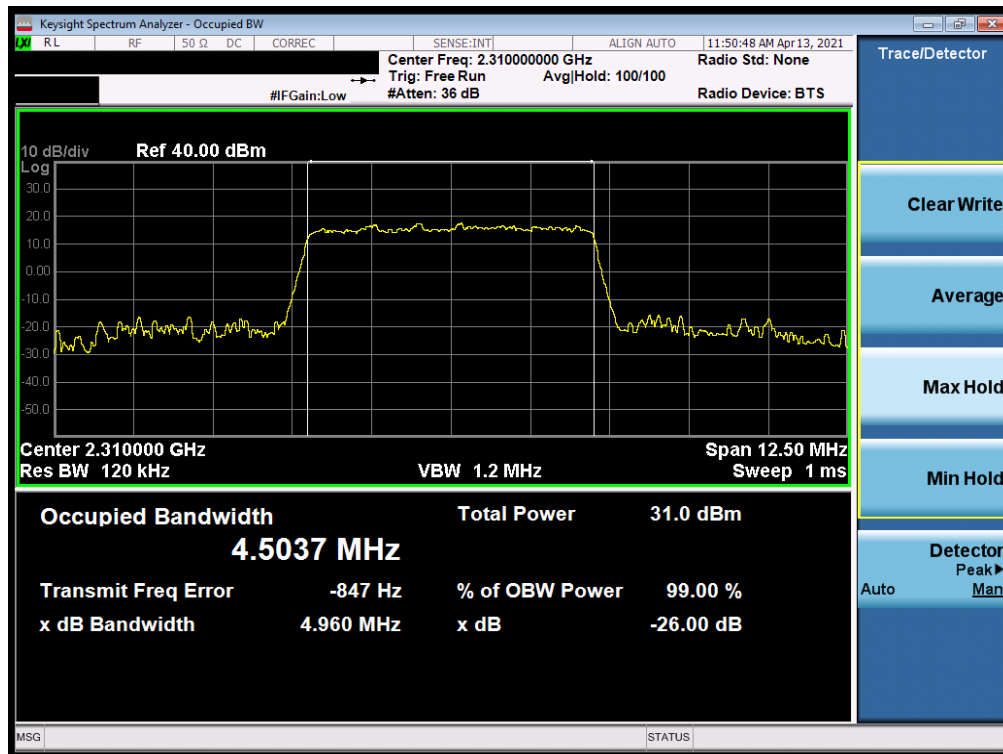


Plot 7-4. Occupied Bandwidth Plot (LTE Band 30 - 5MHz 16-QAM - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 17 of 169

LTE Band 7




Plot 7-5. Occupied Bandwidth Plot (LTE Band 7 - 20MHz QPSK - Full RB)

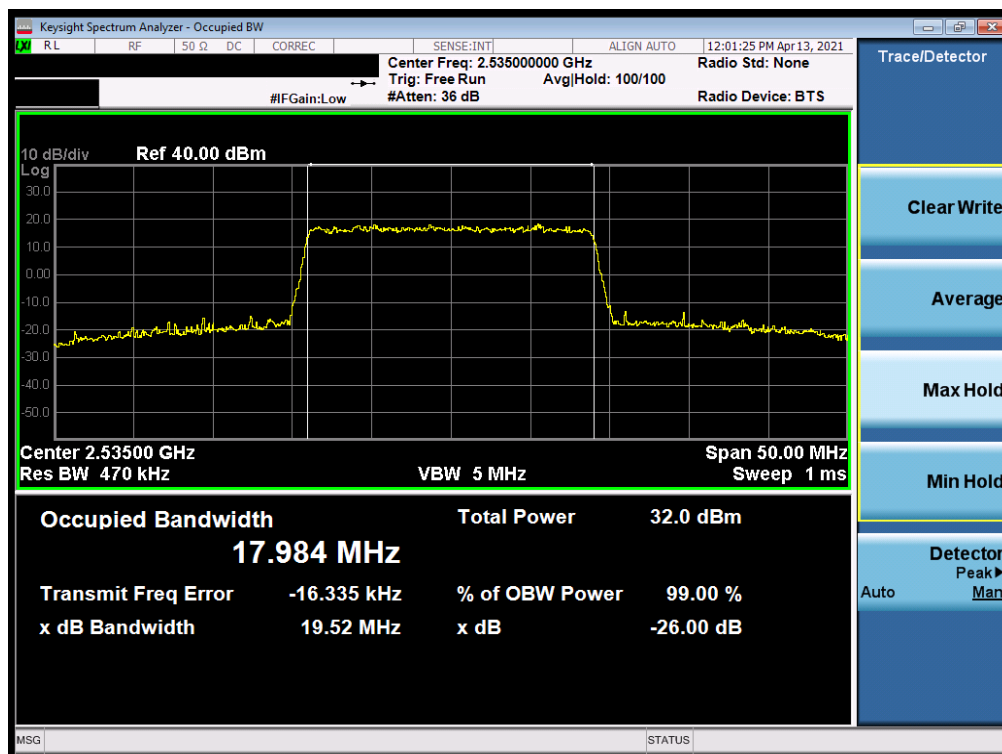


Plot 7-6. Occupied Bandwidth Plot (LTE Band 7 - 20MHz 16-QAM - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 18 of 169

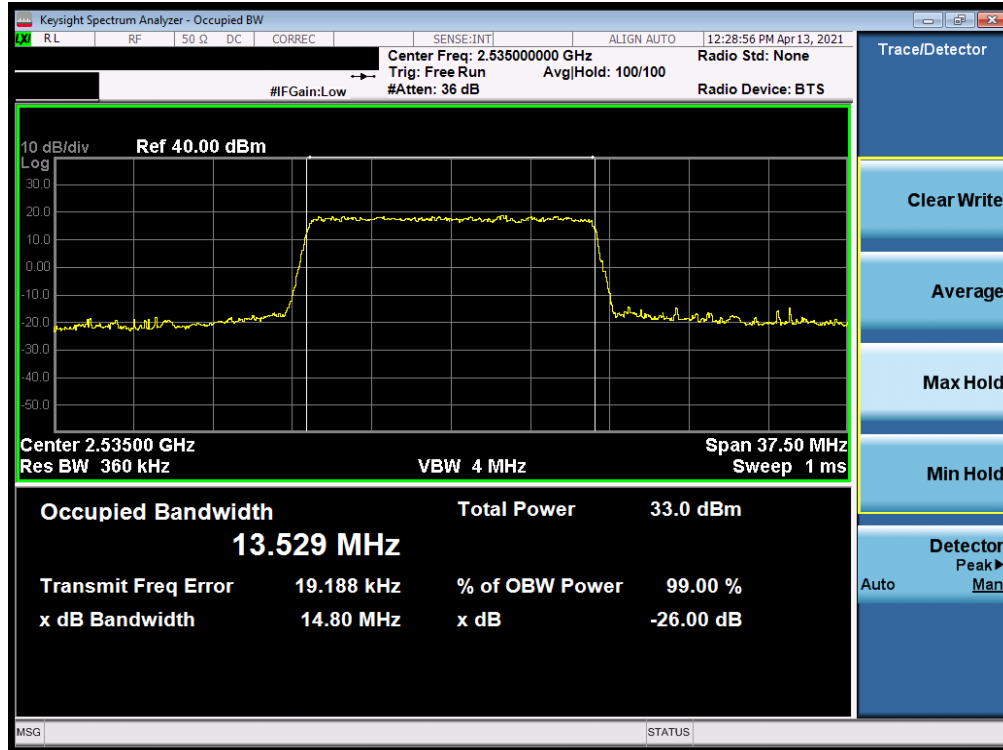


Plot 7-7. Occupied Bandwidth Plot (LTE Band 7 - 15MHz QPSK - Full RB)

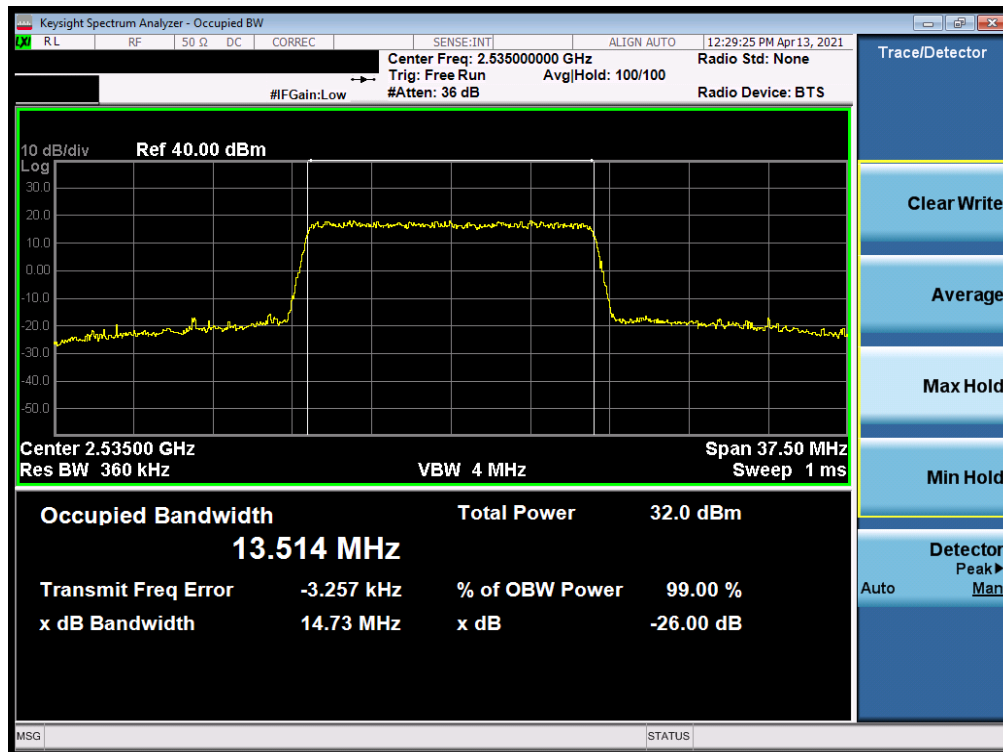

Plot 7-8. Occupied Bandwidth Plot (LTE Band 7 - 15MHz 16-QAM - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 19 of 169

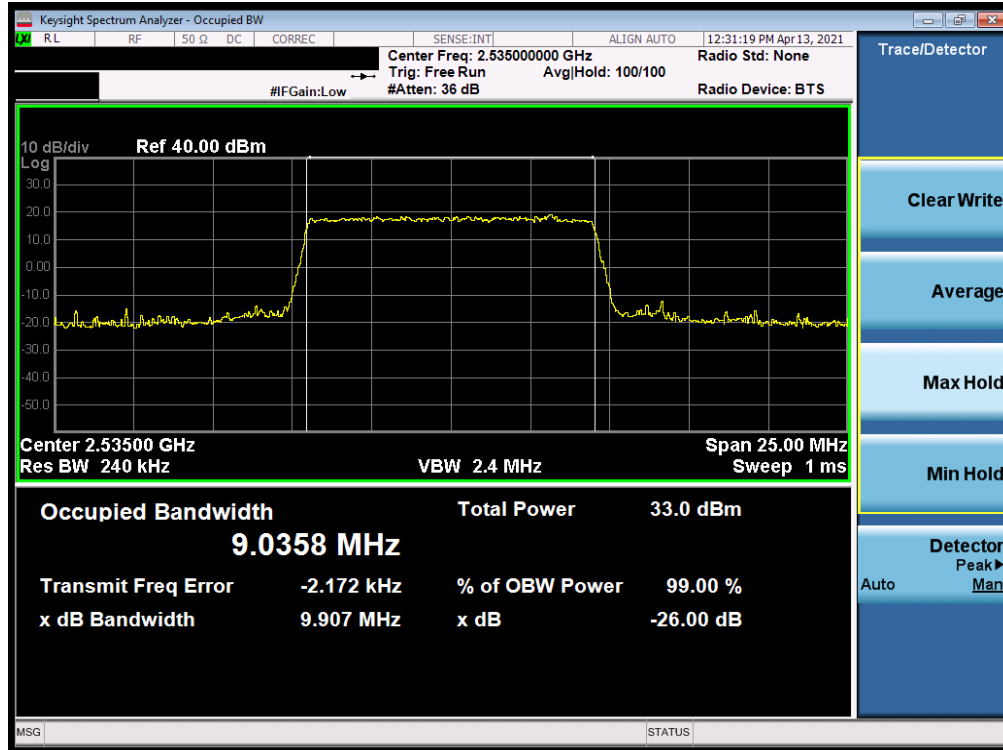


Plot 7-9. Occupied Bandwidth Plot (LTE Band 7 - 10MHz QPSK - Full RB)




Plot 7-10. Occupied Bandwidth Plot (LTE Band 7 - 10MHz 16-QAM - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 20 of 169

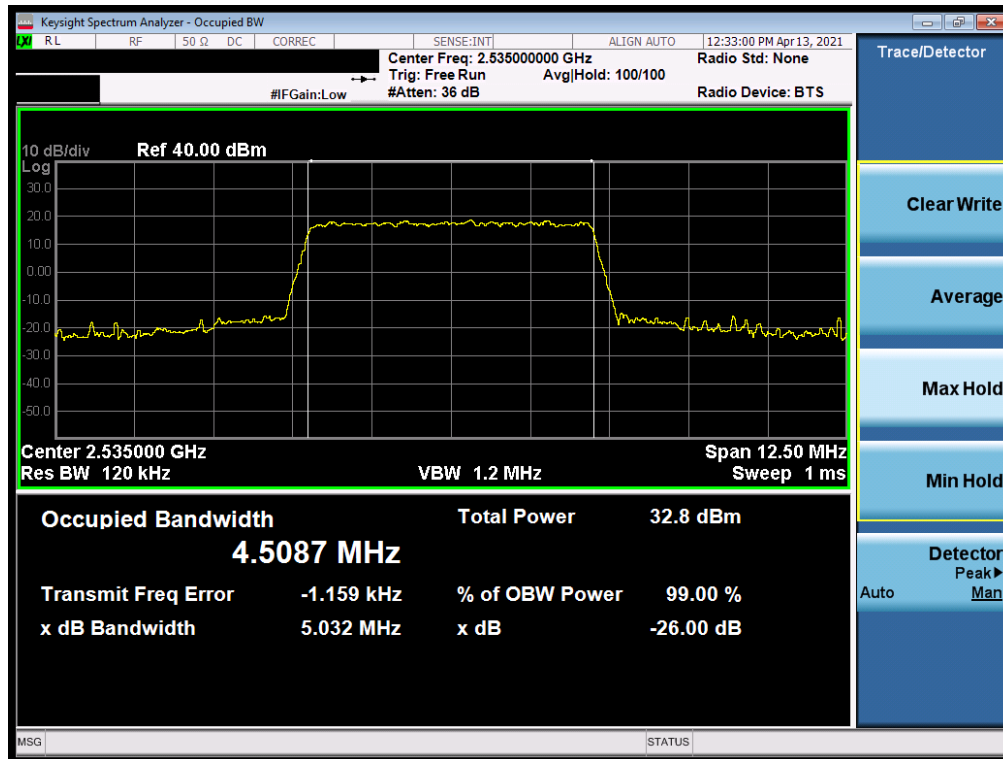


Plot 7-11. Occupied Bandwidth Plot (LTE Band 7 - 5MHz QPSK - Full RB)

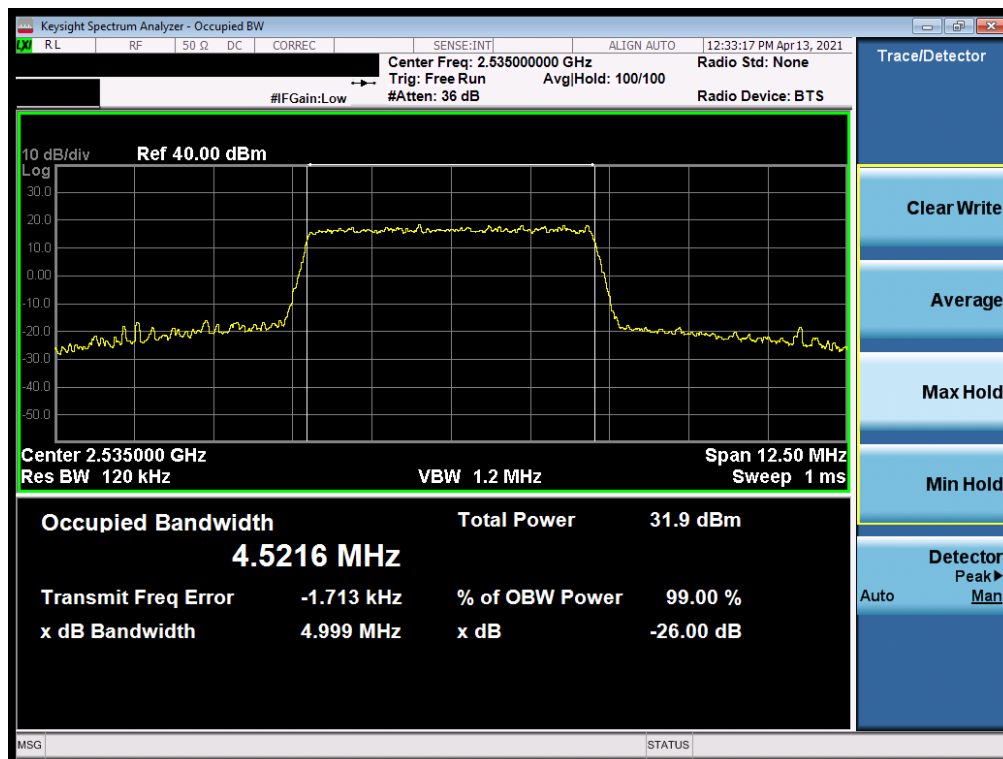


Plot 7-12. Occupied Bandwidth Plot (LTE Band 7 - 5MHz 16-QAM - Full RB)

FCC ID: A3LSMF711U1	PCTEST PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset	Page 21 of 169

LTE Band 41(PC2)

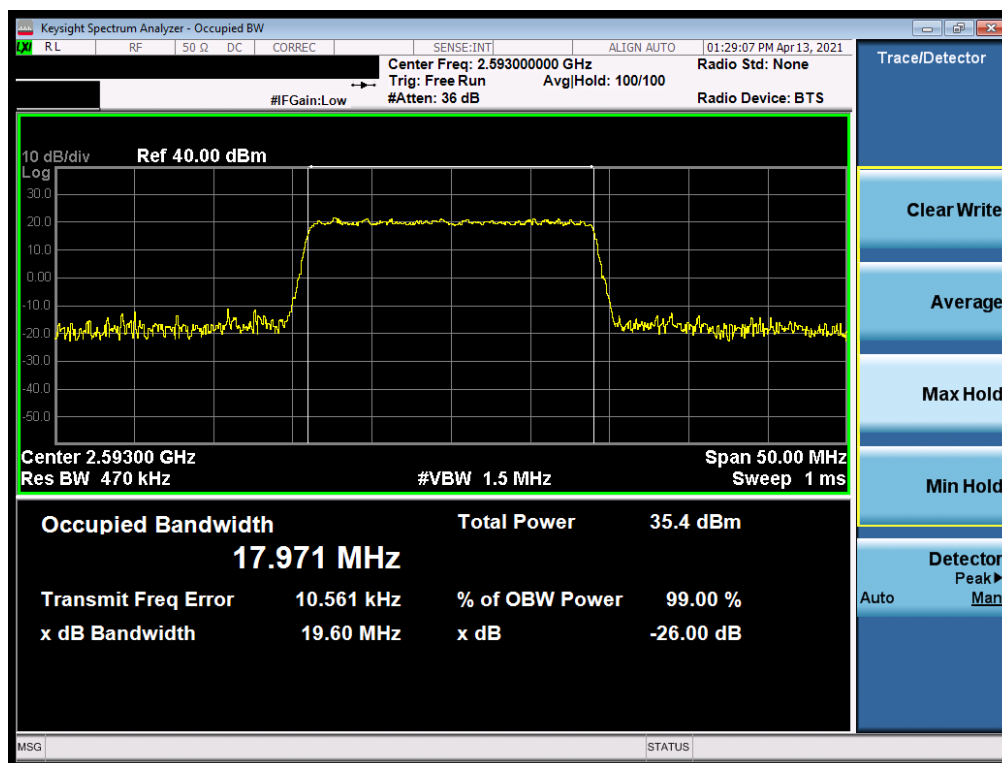


Plot 7-13. Occupied Bandwidth Plot (LTE Band 41(PC2) - 20MHz QPSK - Full RB)

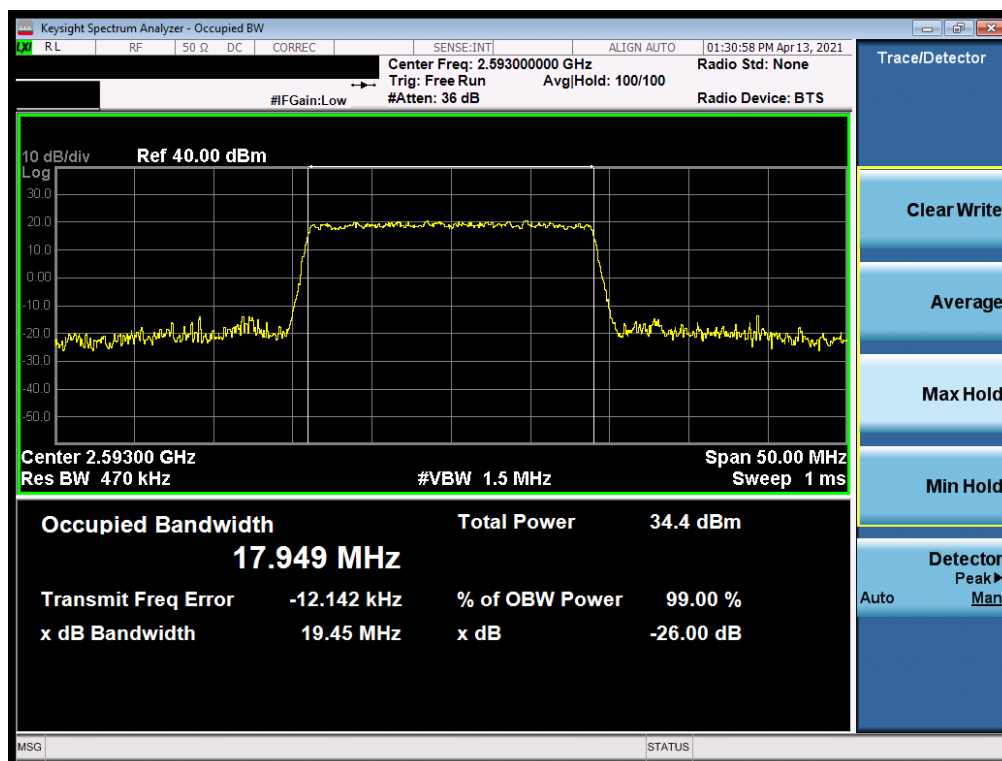


Plot 7-14. Occupied Bandwidth Plot (LTE Band 41(PC2) - 20MHz 16-QAM - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 22 of 169

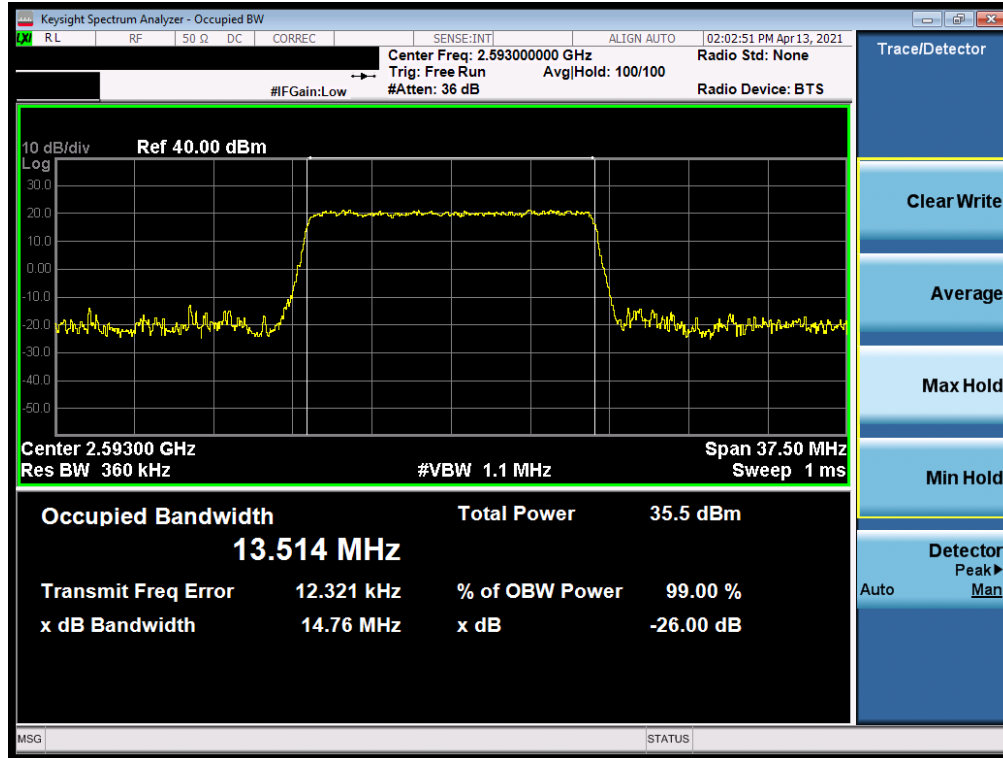


Plot 7-15. Occupied Bandwidth Plot (LTE Band 41(PC2) - 15MHz QPSK - Full RB)

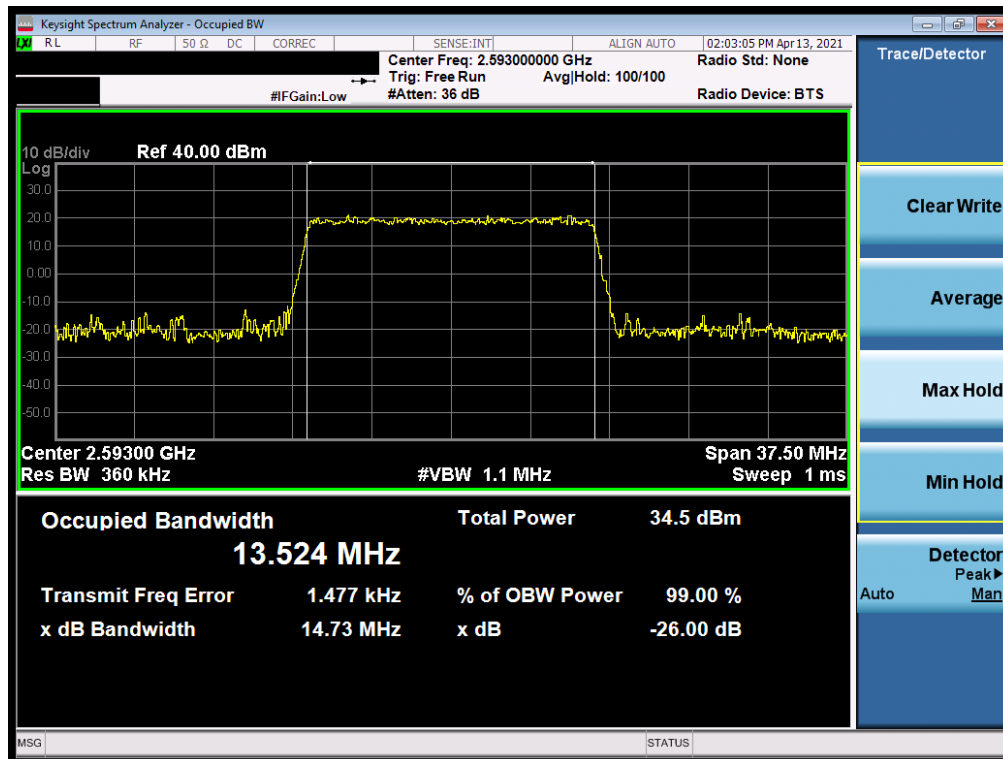


Plot 7-16. Occupied Bandwidth Plot (LTE Band 41(PC2) - 15MHz 16-QAM - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 23 of 169

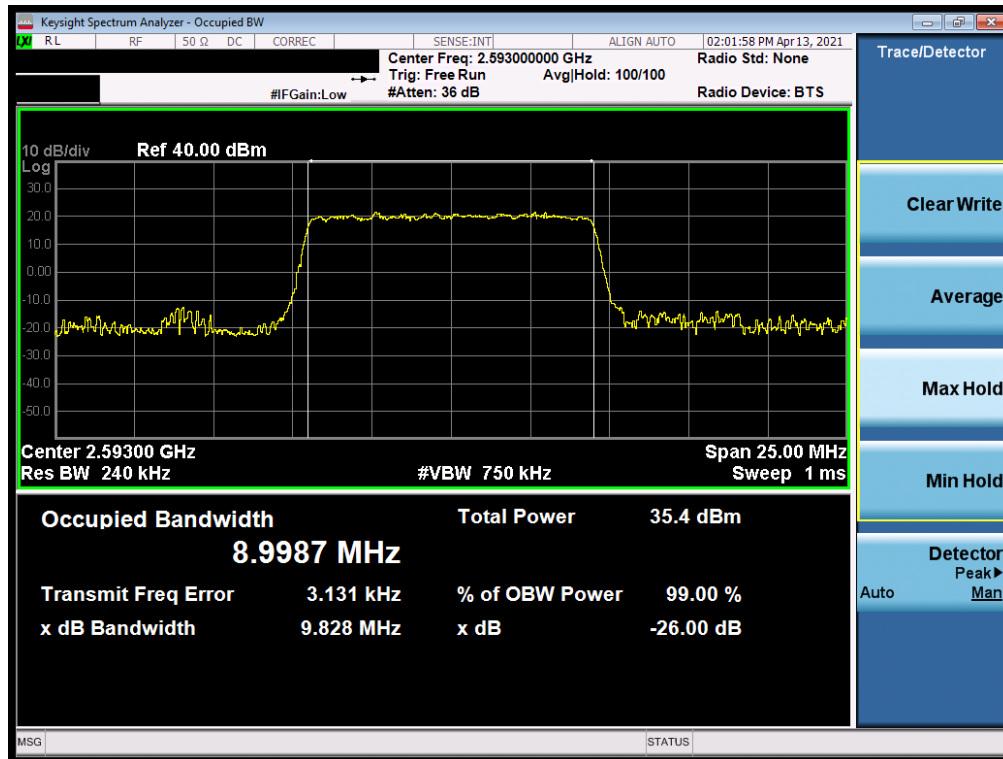


Plot 7-17. Occupied Bandwidth Plot (LTE Band 41(PC2) - 10MHz QPSK - Full RB)

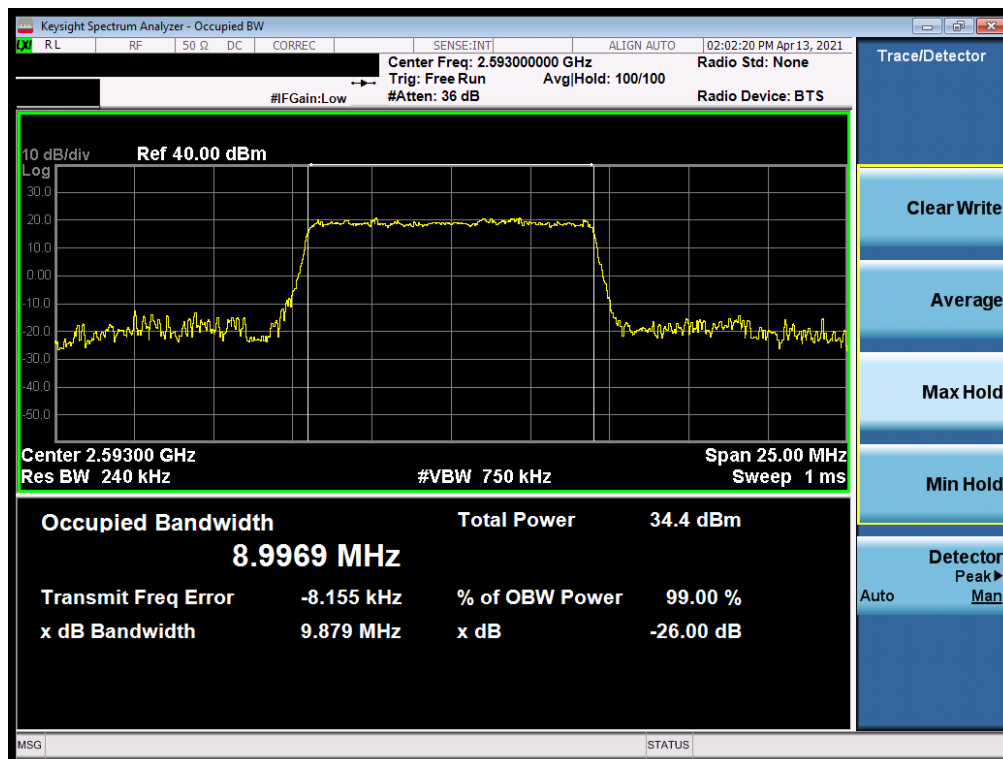


Plot 7-18. Occupied Bandwidth Plot (LTE Band 41(PC2) - 10MHz 16-QAM - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 24 of 169

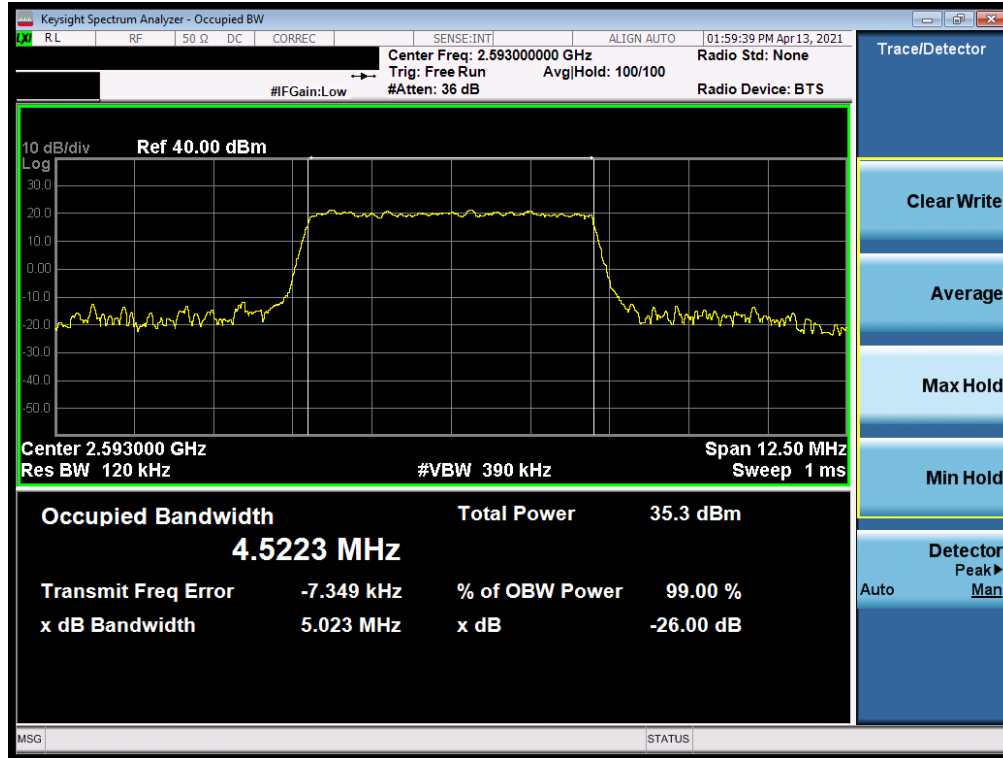


Plot 7-19. Occupied Bandwidth Plot (LTE Band 41(PC2) - 5MHz QPSK - Full RB)

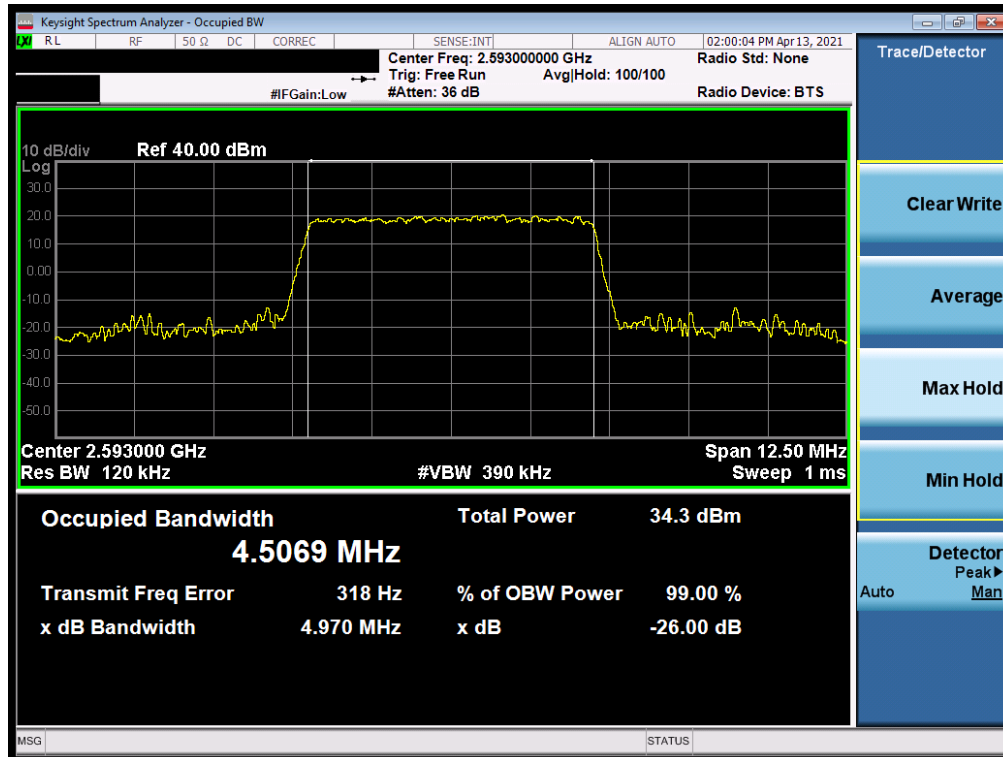


Plot 7-20. Occupied Bandwidth Plot (LTE Band 41(PC2) - 5MHz 16-QAM - Full RB)

FCC ID: A3LSMF711U1	PCTEST PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset	Page 25 of 169

LTE Band 41(PC3)/38

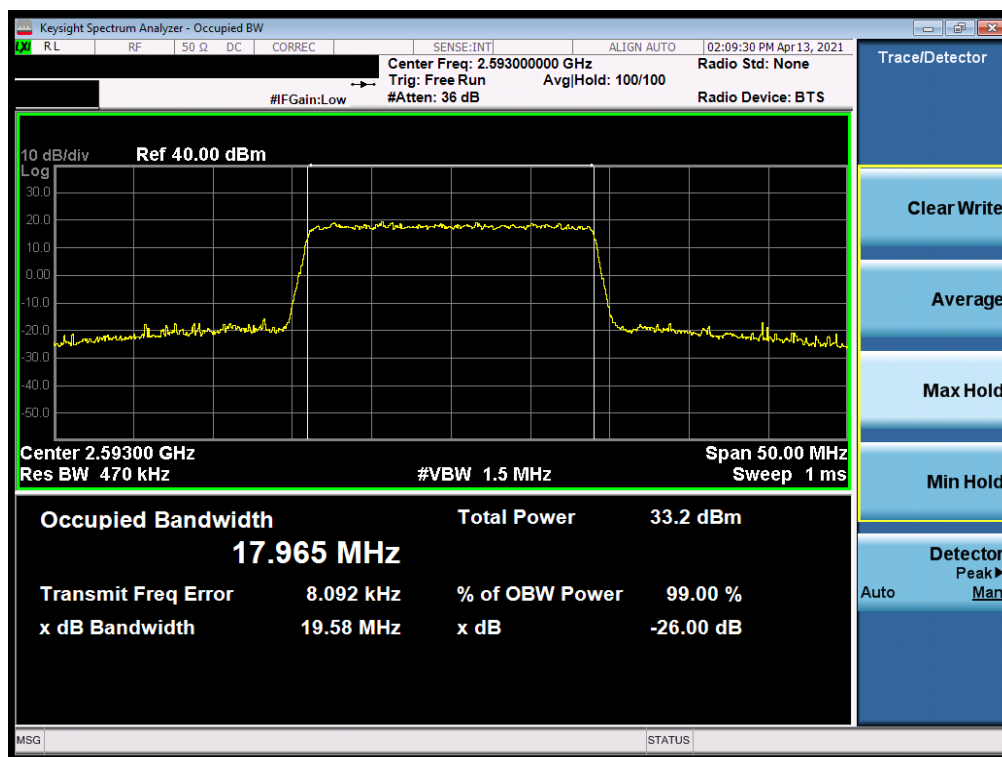


Plot 7-21. Occupied Bandwidth Plot (LTE Band 41(PC3)/38 - 20MHz QPSK - Full RB)

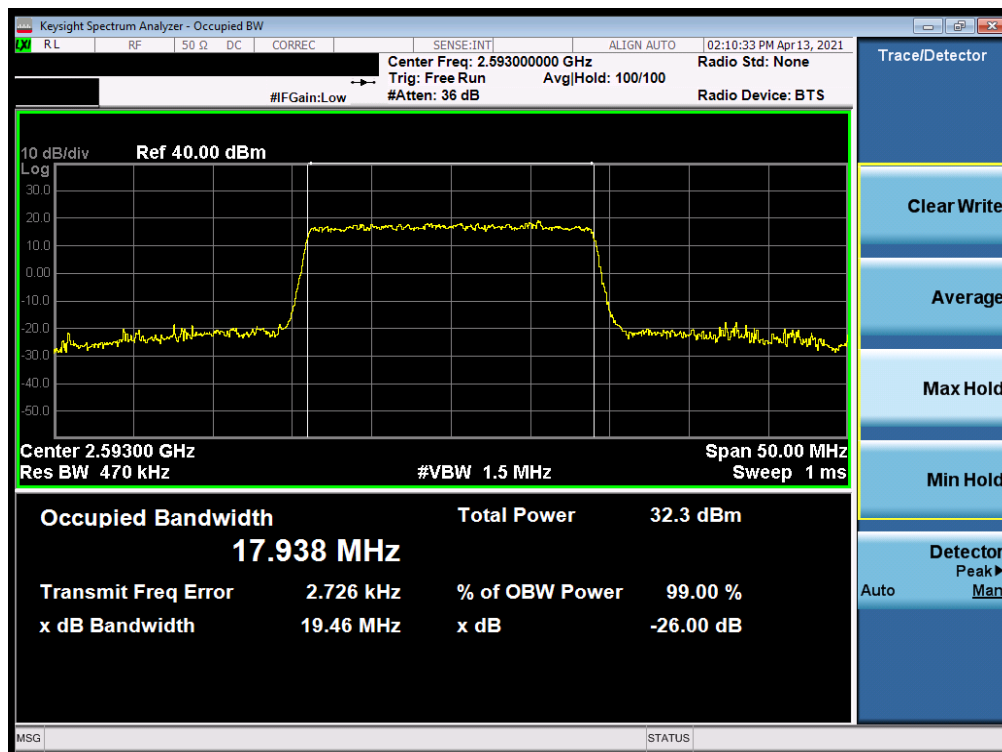


Plot 7-22. Occupied Bandwidth Plot (LTE Band 41(PC3)/38 - 20MHz 16-QAM - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 26 of 169

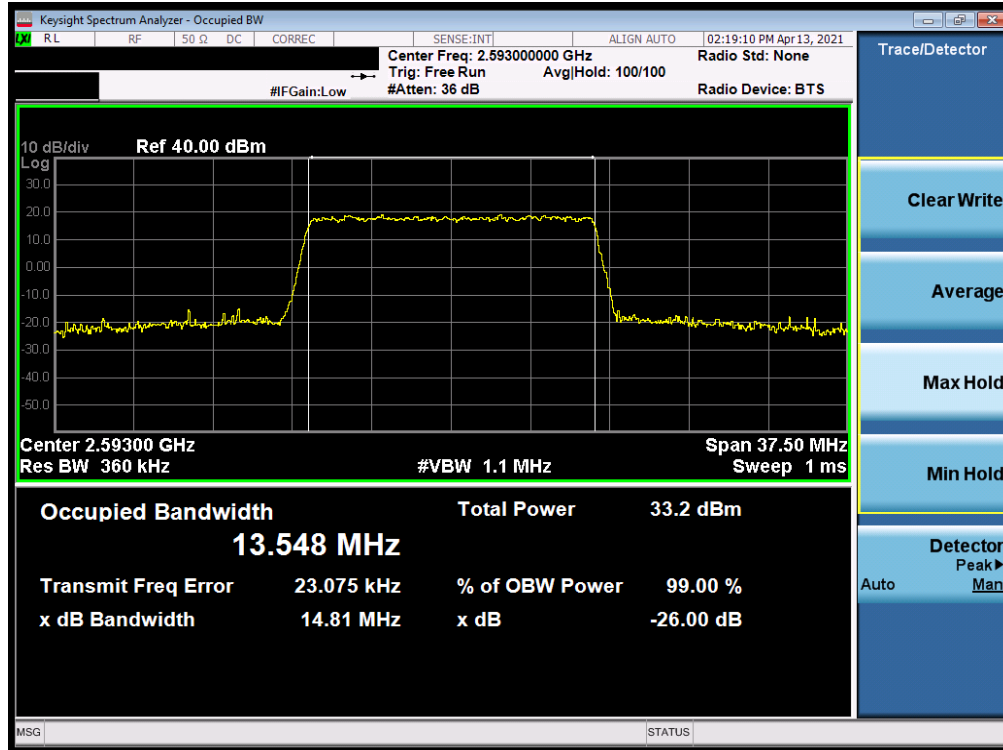


Plot 7-23. Occupied Bandwidth Plot (LTE Band 41(PC3)/38 - 15MHz QPSK - Full RB)

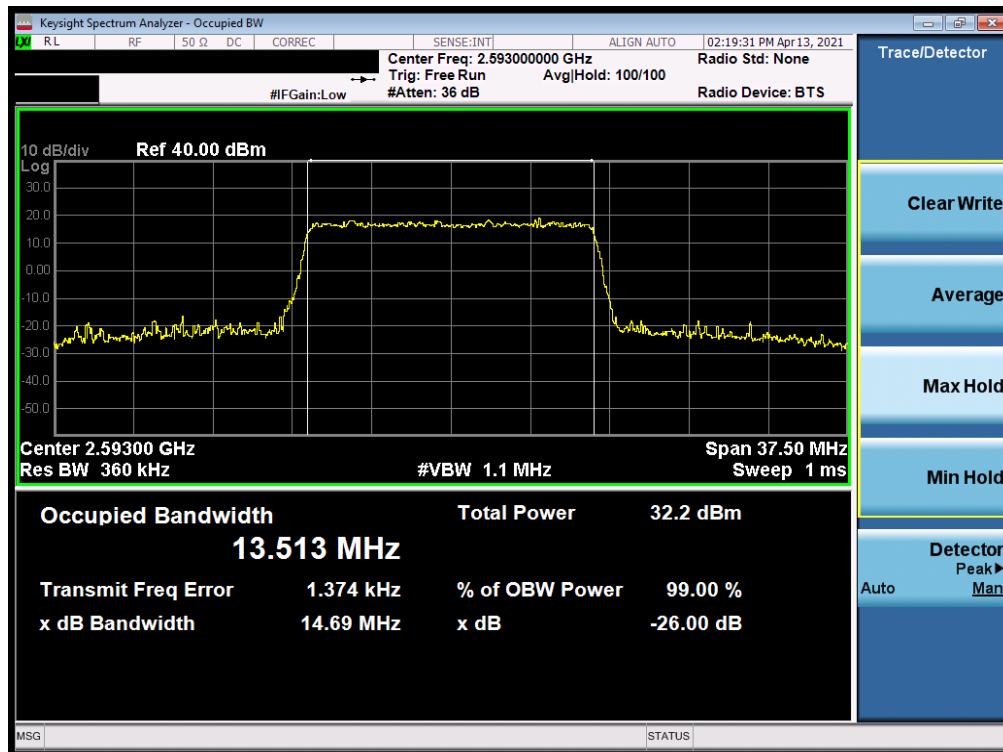


Plot 7-24. Occupied Bandwidth Plot (LTE Band 41(PC3)/38 - 15MHz 16-QAM - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 27 of 169

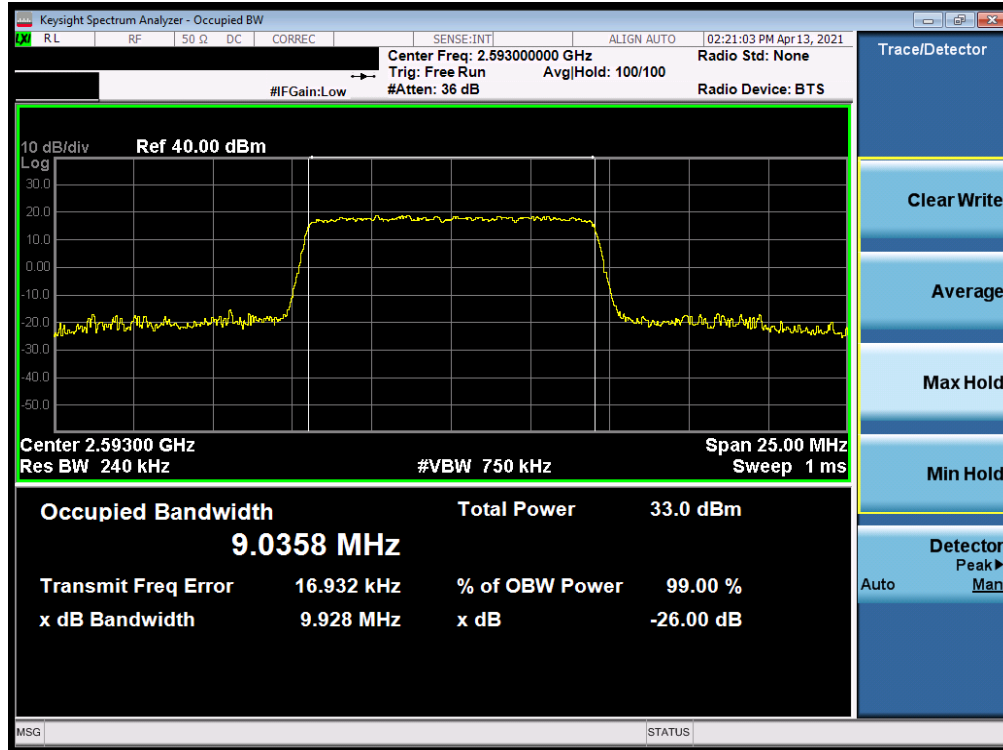

Plot 7-25. Occupied Bandwidth Plot (LTE Band 41(PC3)/38 - 10MHz QPSK - Full RB)

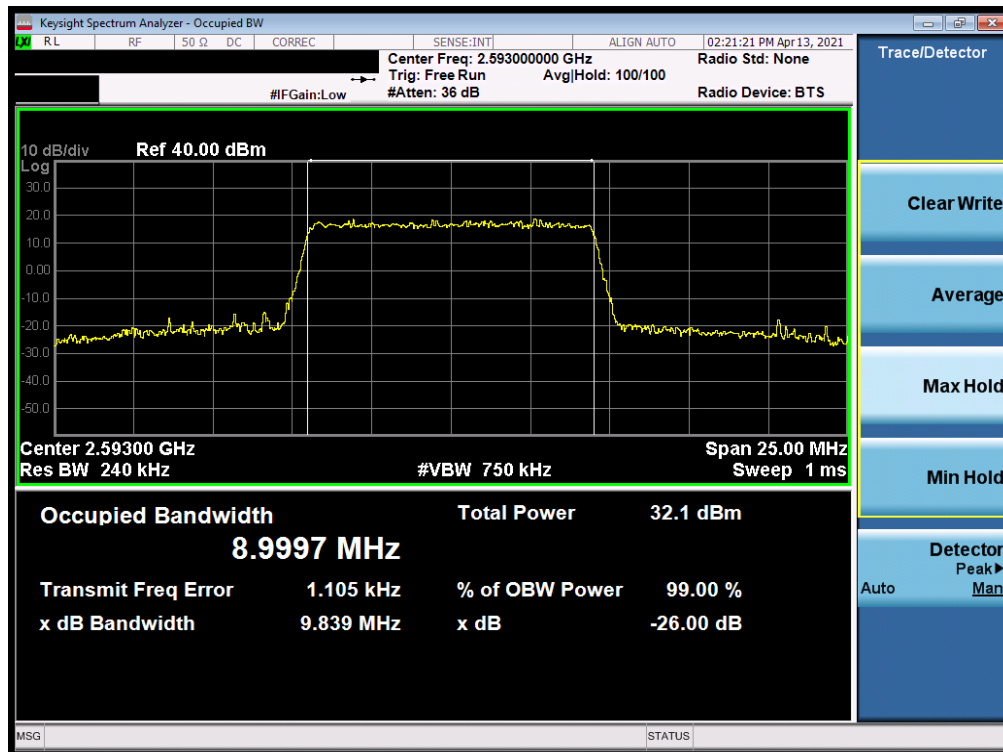


Plot 7-26. Occupied Bandwidth Plot (LTE Band 41(PC3)/38 - 10MHz 16-QAM - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 28 of 169




Plot 7-27. Occupied Bandwidth Plot (LTE Band 41(PC3)/38 - 5MHz QPSK - Full RB)

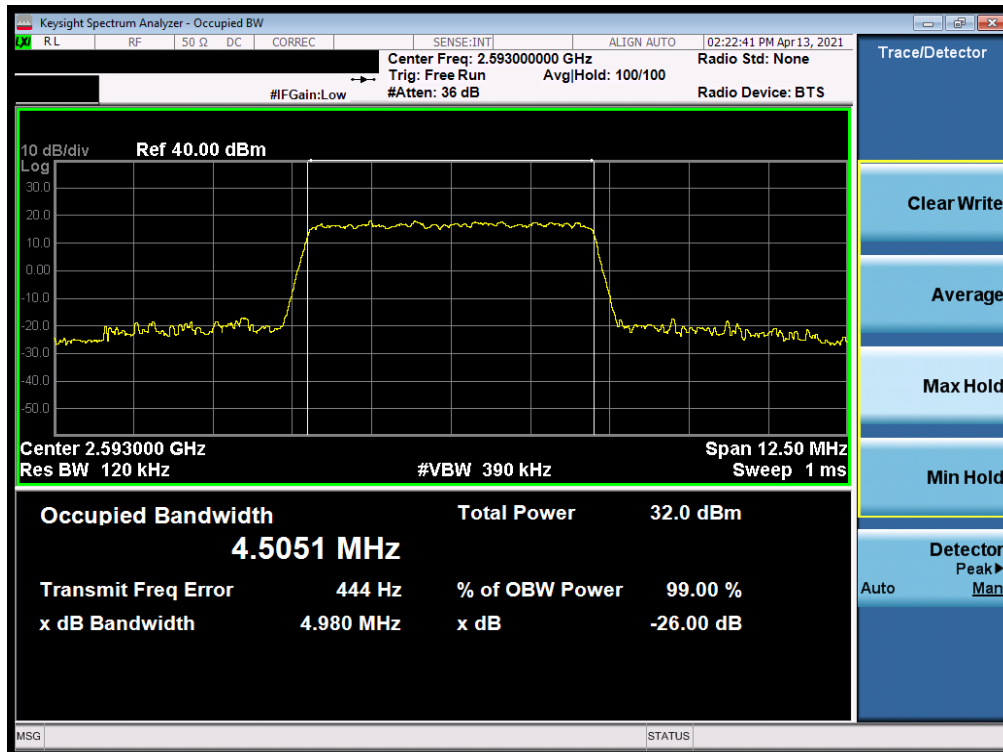


Plot 7-28. Occupied Bandwidth Plot (LTE Band 41(PC3)/38 - 5MHz 16-QAM - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 29 of 169

NR Band n30

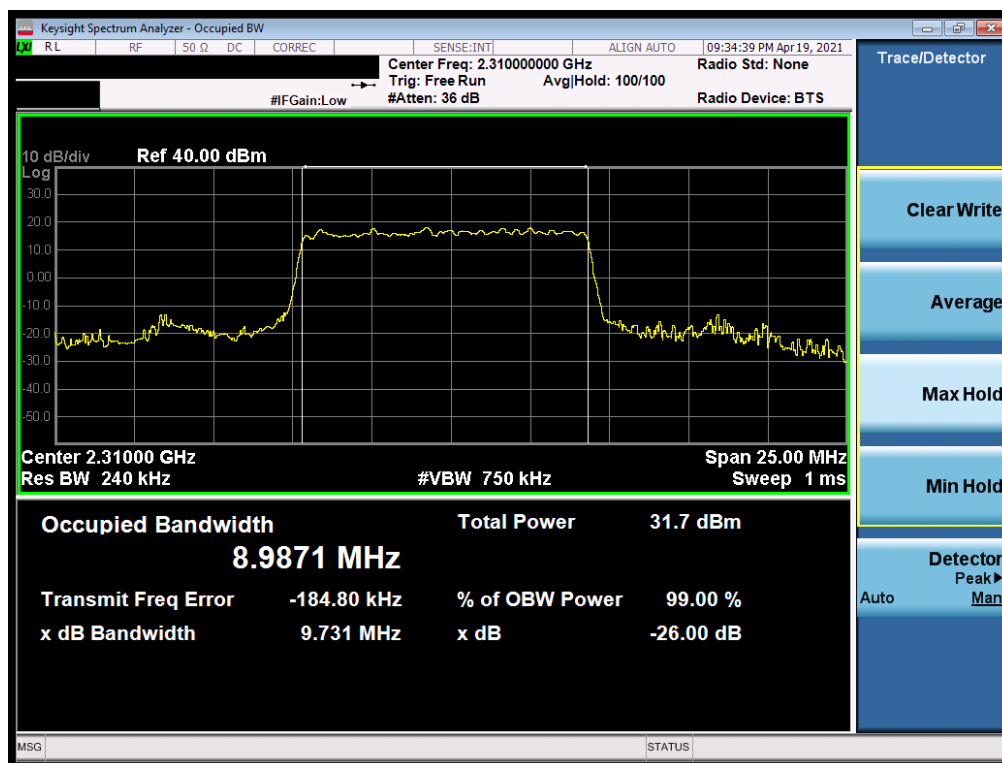


Plot 7-29. Occupied Bandwidth Plot (NR Band n30 - 10MHz $\pi/2$ BPSK - Full RB)

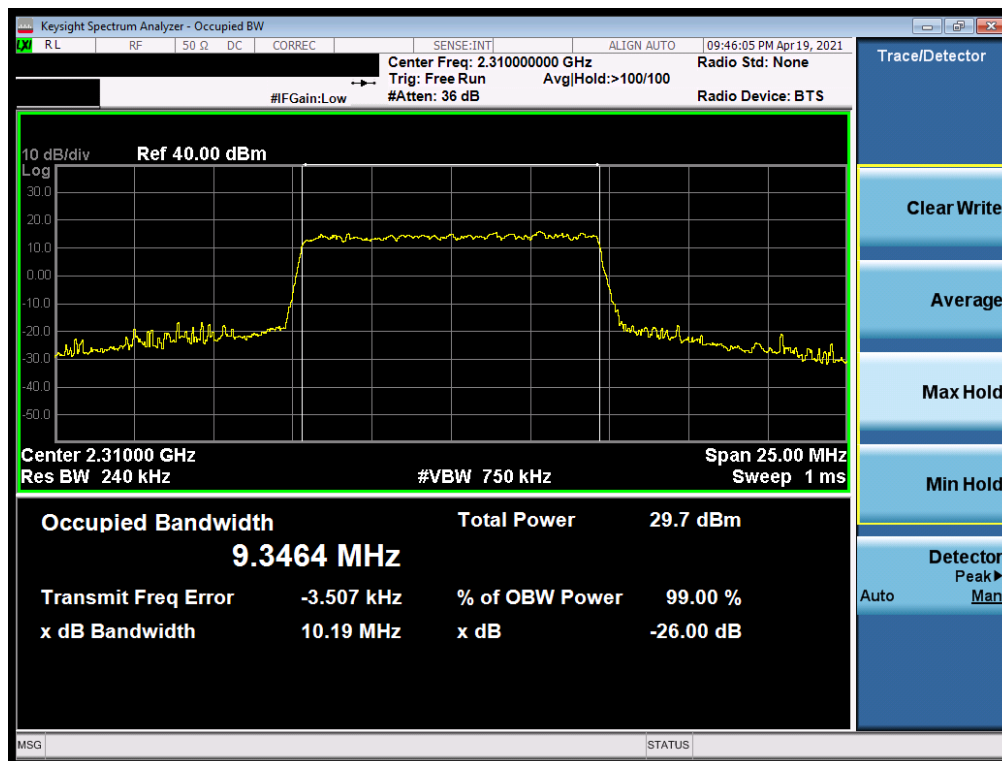


Plot 7-30. Occupied Bandwidth Plot (NR Band n30 - 10MHz QPSK - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 30 of 169

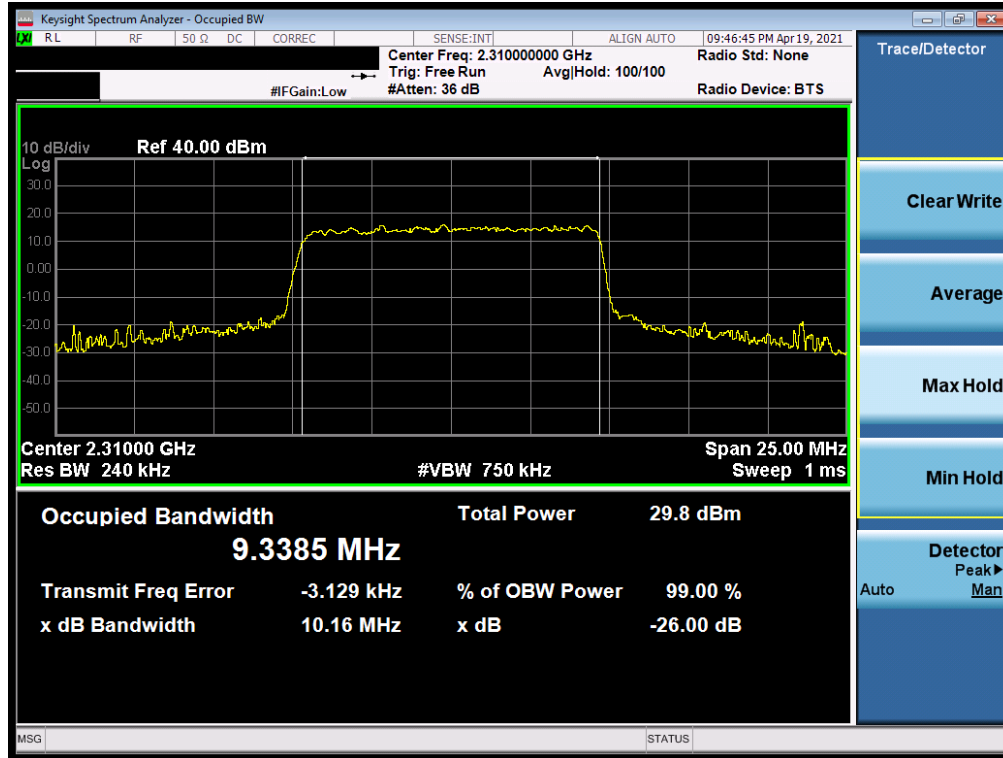


Plot 7-31. Occupied Bandwidth Plot (NR Band n30 - 10MHz 16-QAM - Full RB)

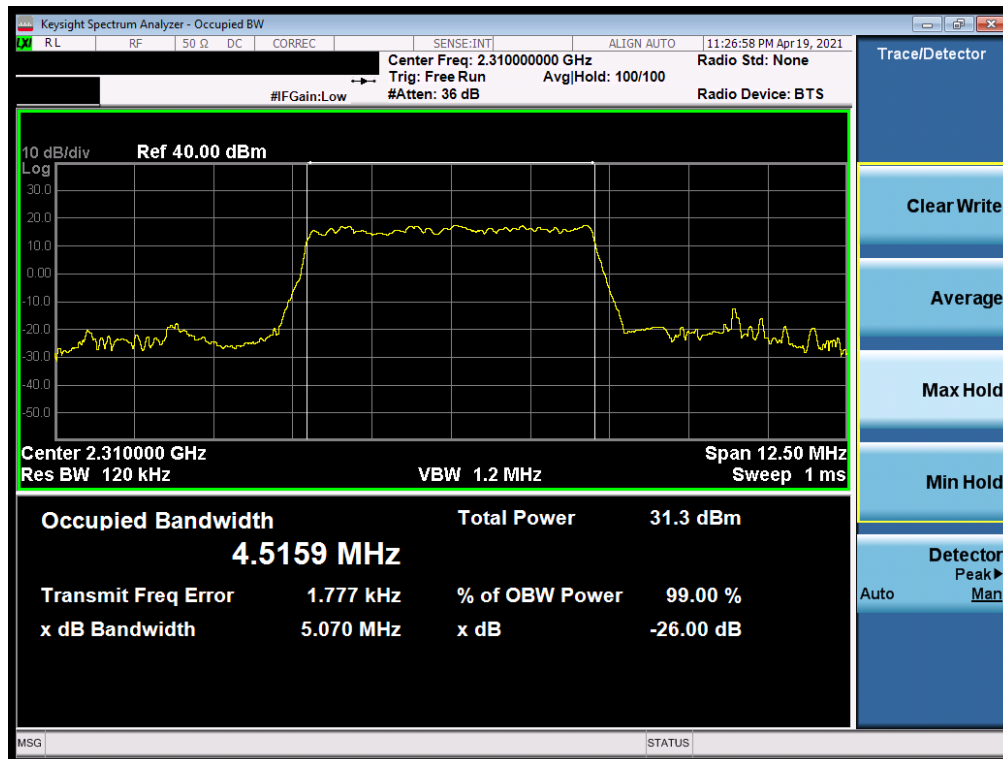


Plot 7-32. Occupied Bandwidth Plot (NR Band n30 - 5MHz $\pi/2$ BPSK - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 31 of 169

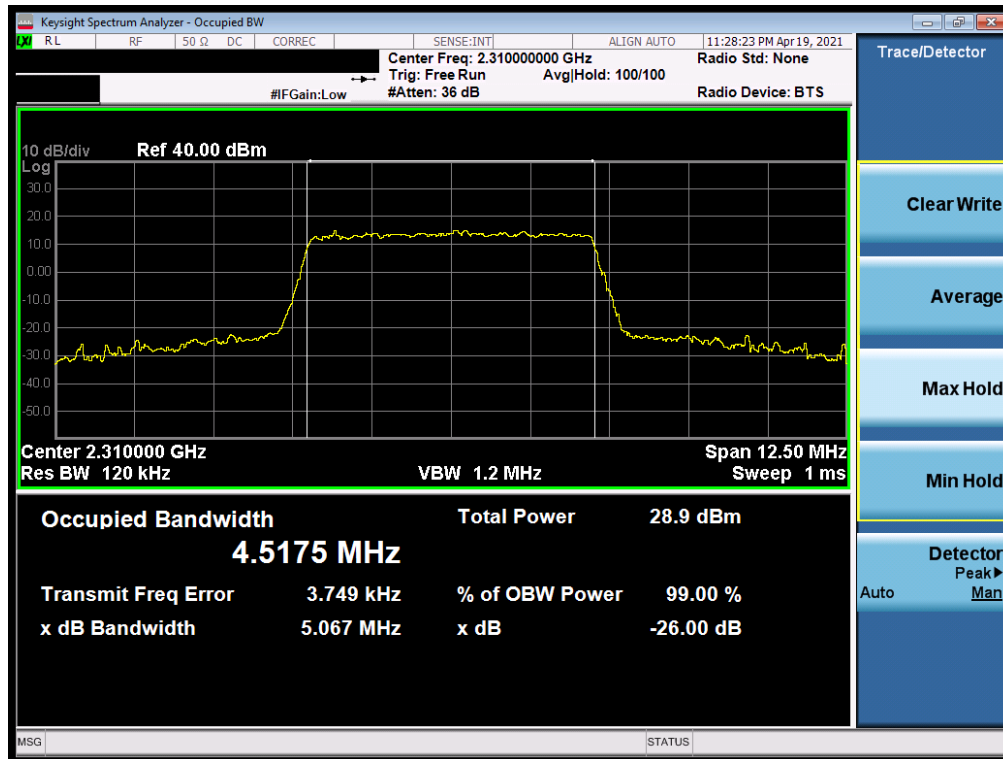


Plot 7-33. Occupied Bandwidth Plot (NR Band n30 - 5MHz QPSK - Full RB)

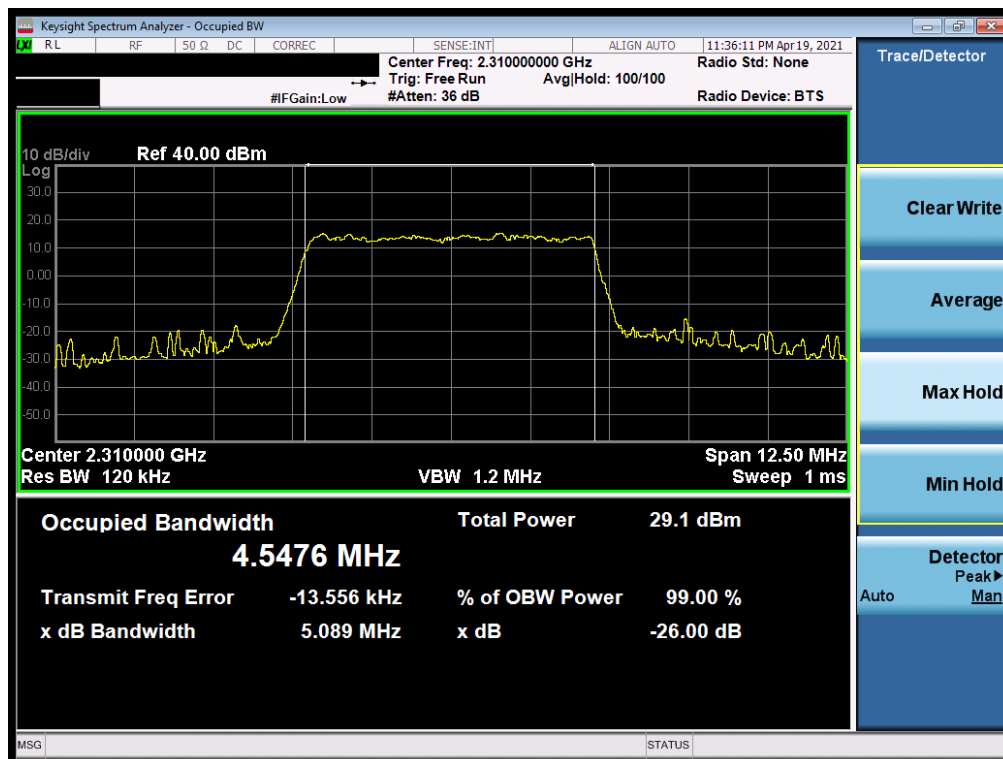


Plot 7-34. Occupied Bandwidth Plot (NR Band n30 - 5MHz 16-QAM - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 32 of 169

NR Band n41 (PC2)

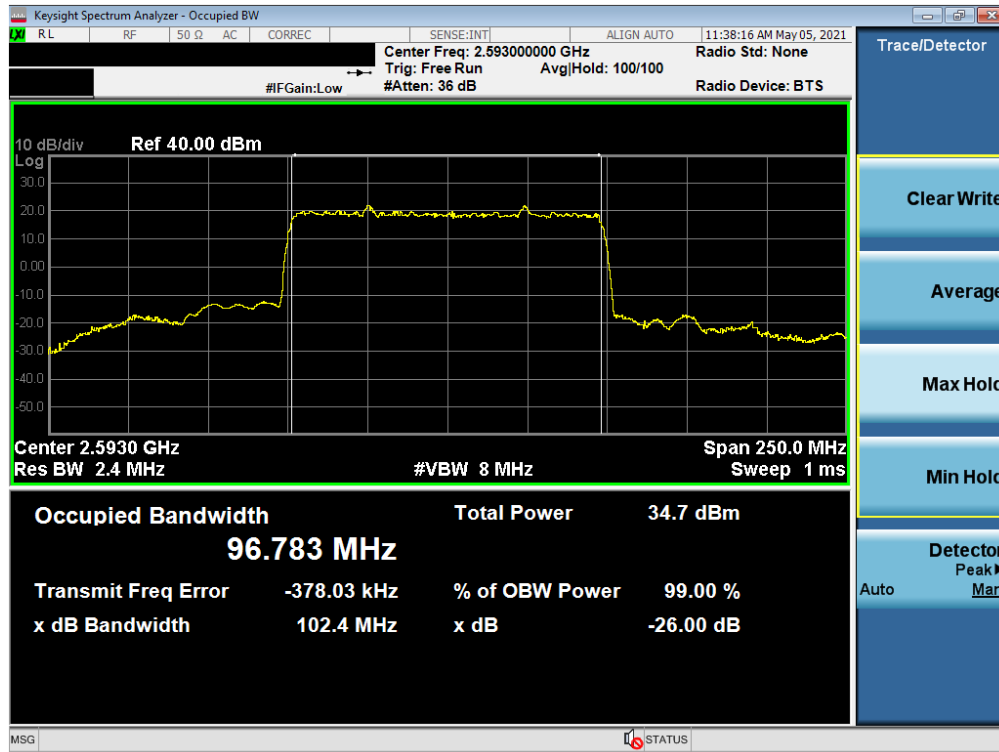


Plot 7-35. Occupied Bandwidth Plot (NR Band n41 - 100MHz $\pi/2$ BPSK - Full RB)

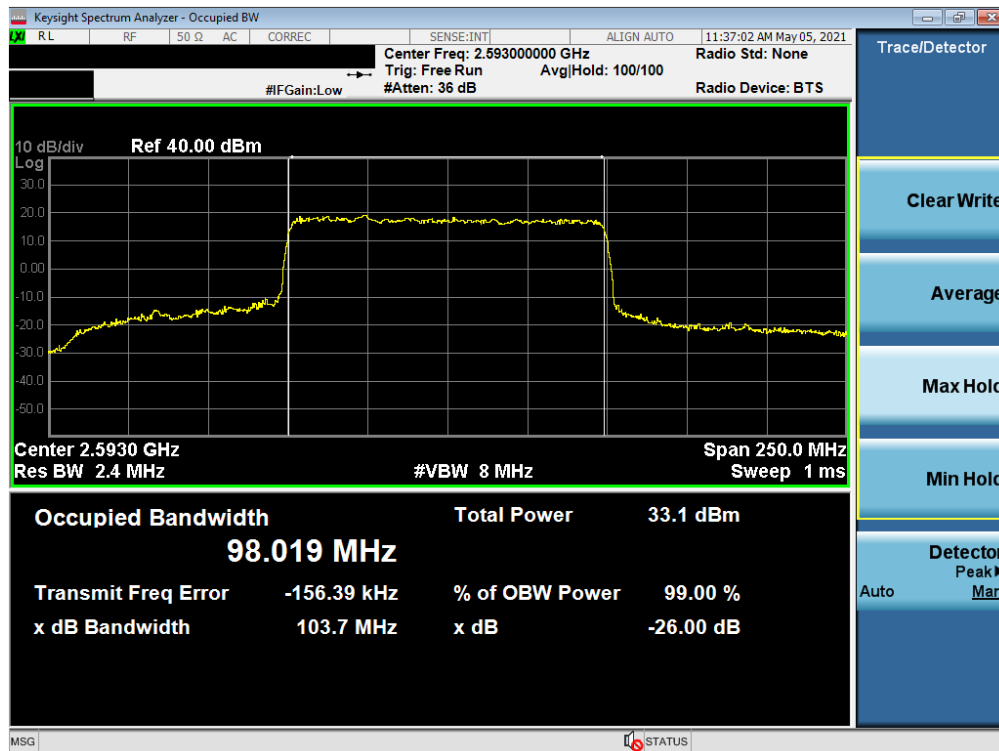


Plot 7-36. Occupied Bandwidth Plot (NR Band n41 - 100MHz QPSK - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 33 of 169

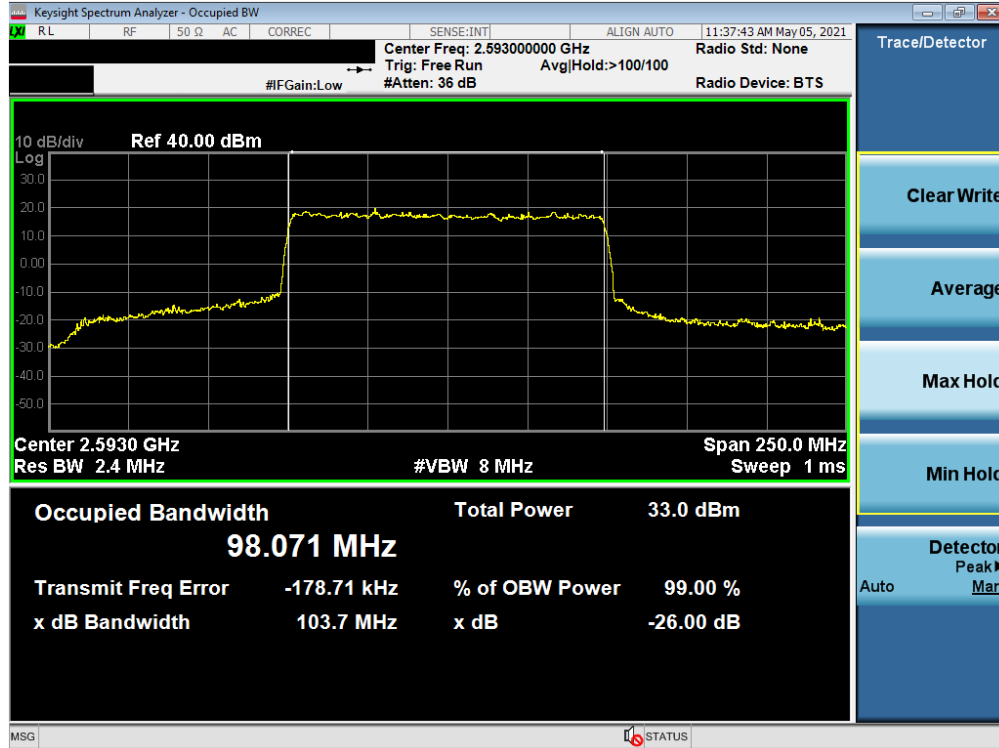


Plot 7-37. Occupied Bandwidth Plot (NR Band n41 - 100MHz 16-QAM - Full RB)

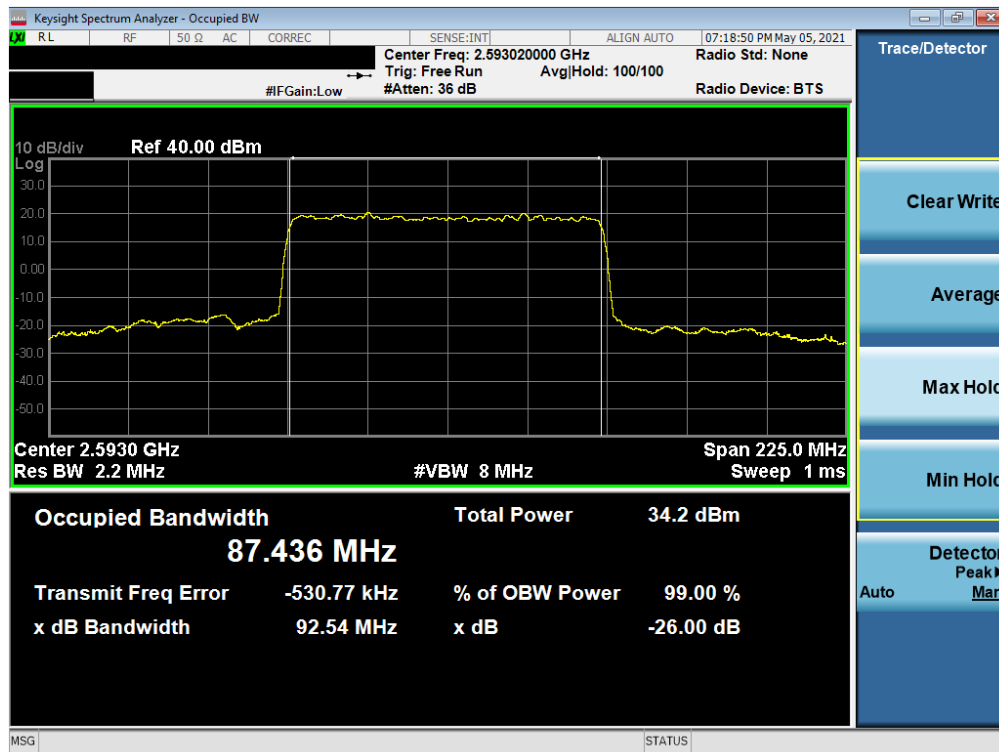


Plot 7-38. Occupied Bandwidth Plot (NR Band n41 - 90MHz $\pi/2$ BPSK - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 34 of 169

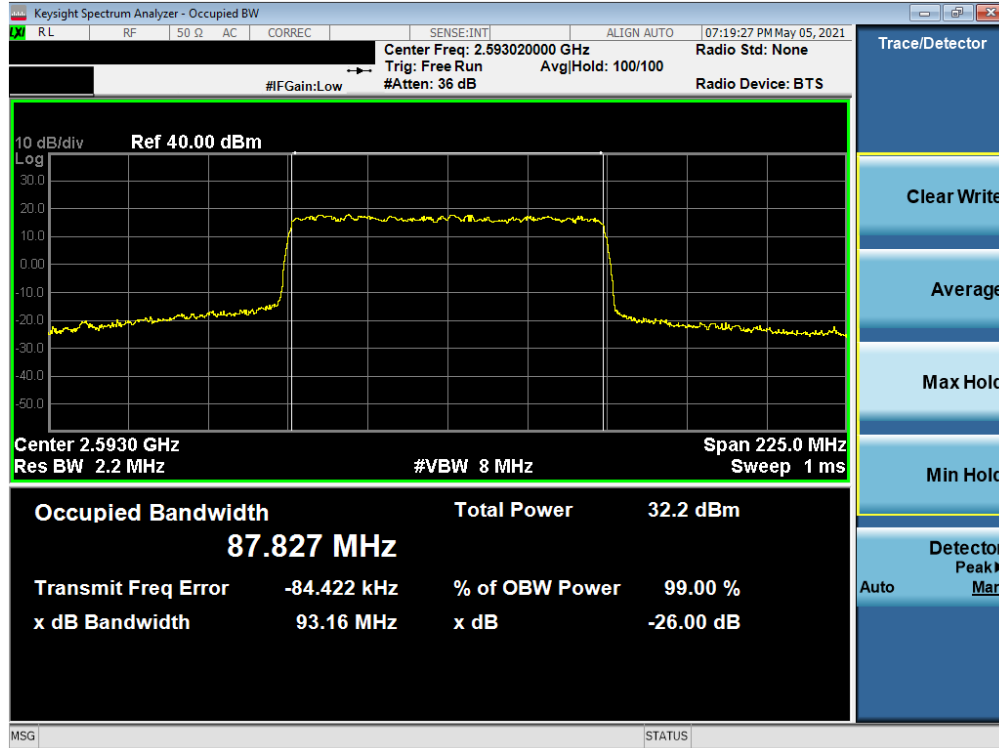


Plot 7-39. Occupied Bandwidth Plot (NR Band n41 - 90MHz QPSK - Full RB)

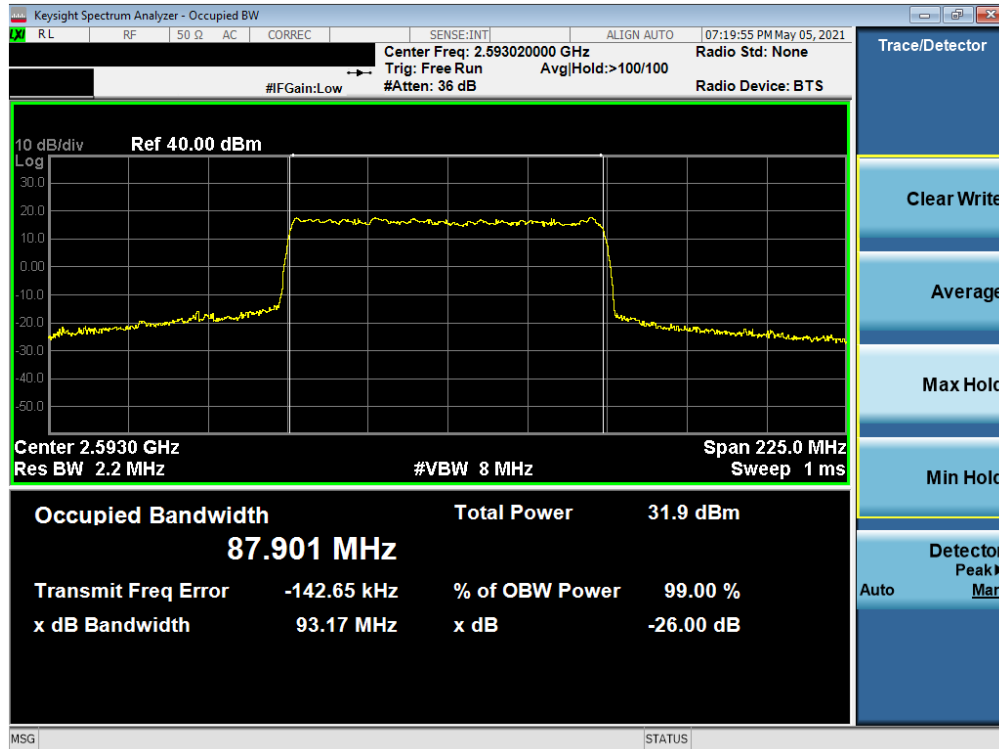


Plot 7-40. Occupied Bandwidth Plot (NR Band n41 - 90MHz 16-QAM - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 35 of 169

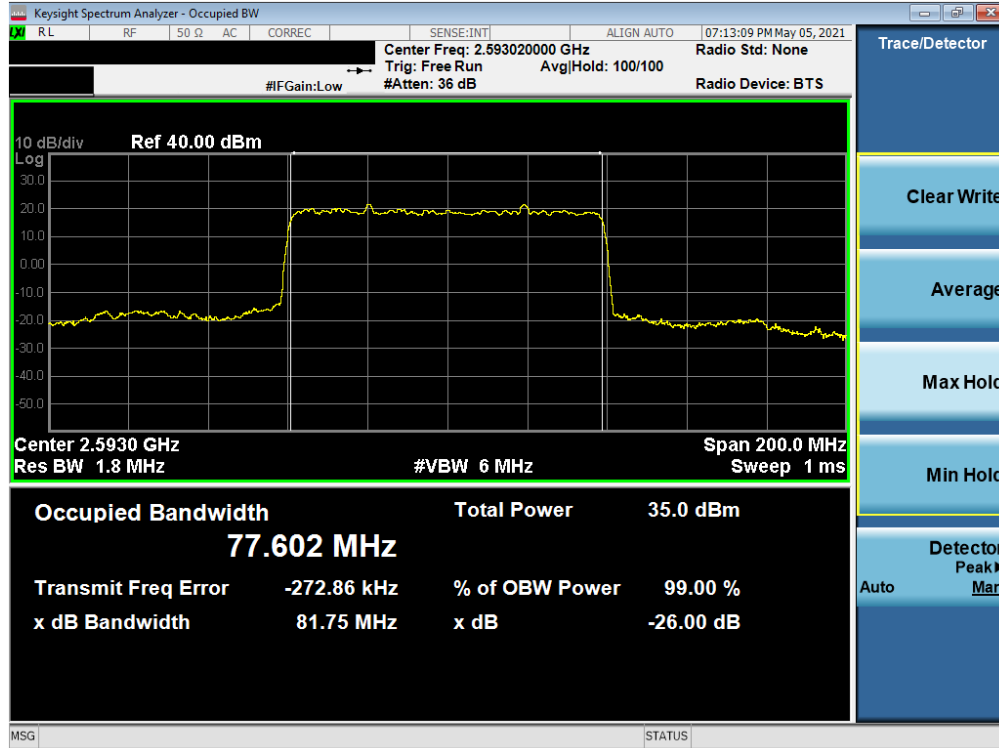


Plot 7-41. Occupied Bandwidth Plot (NR Band n41 - 80MHz $\pi/2$ BPSK - Full RB)

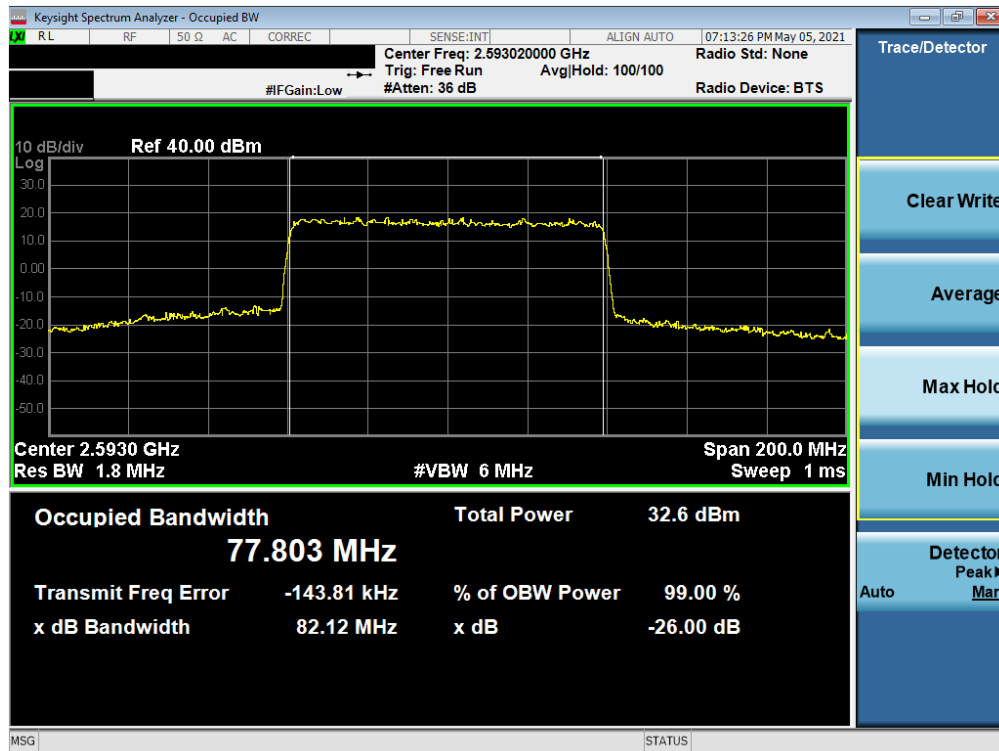


Plot 7-42. Occupied Bandwidth Plot (NR Band n41 - 80MHz QPSK - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 36 of 169

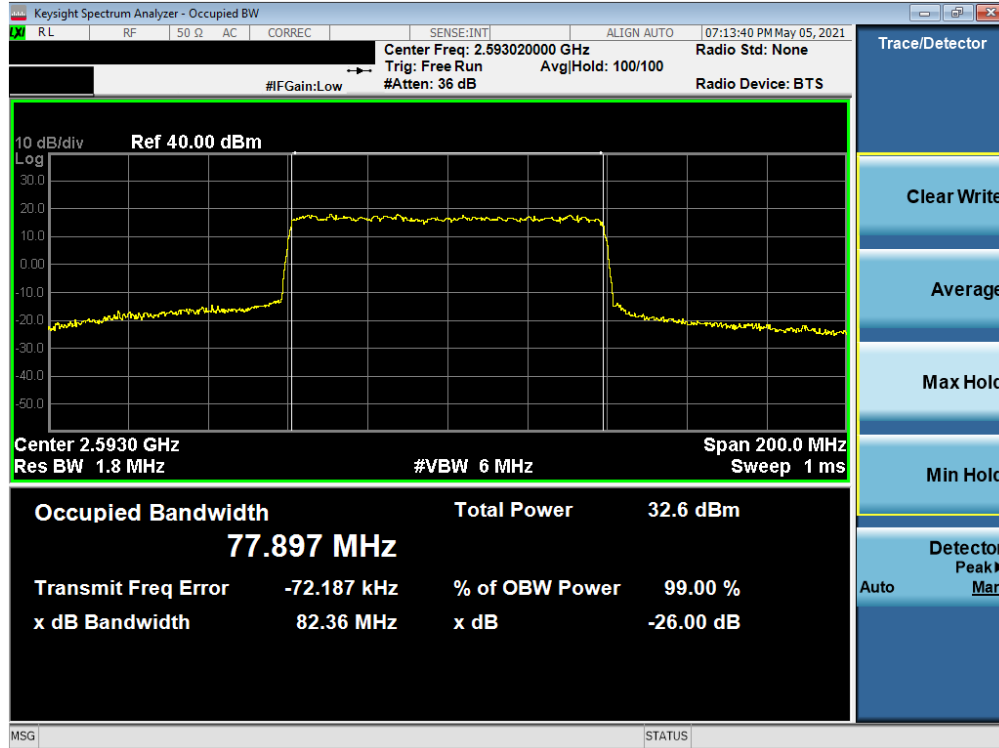


Plot 7-43. Occupied Bandwidth Plot (NR Band n41 - 80MHz 16-QAM - Full RB)

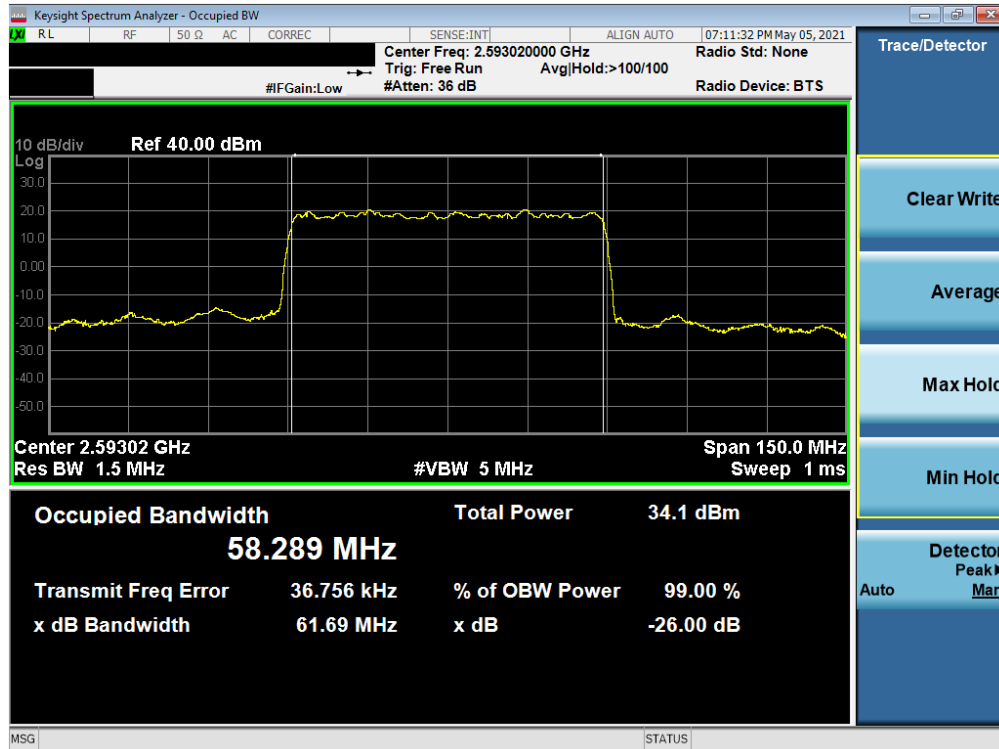


Plot 7-44. Occupied Bandwidth Plot (NR Band n41 - 60MHz $\pi/2$ BPSK - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 37 of 169

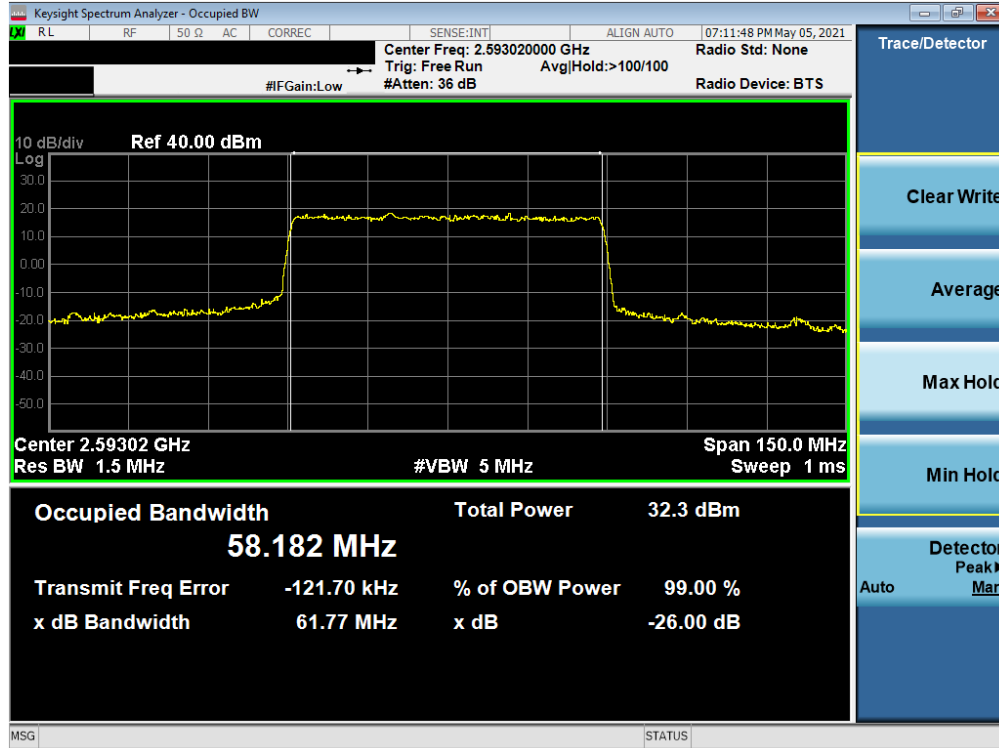


Plot 7-45. Occupied Bandwidth Plot (NR Band n41 - 60MHz QPSK - Full RB)

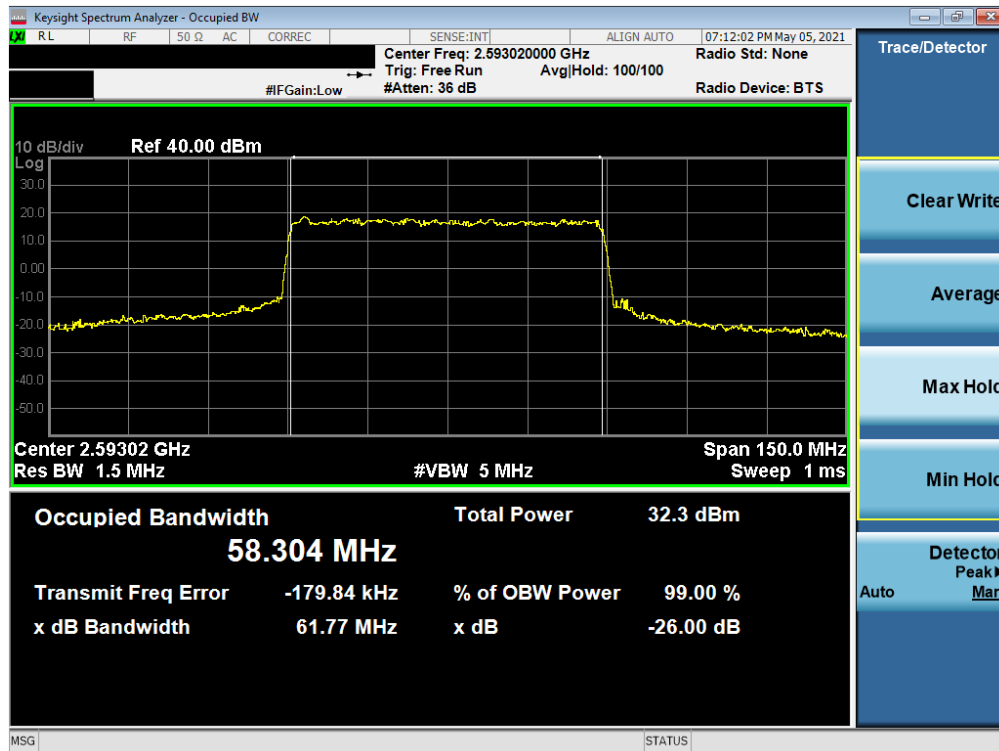


Plot 7-46. Occupied Bandwidth Plot (NR Band n41 - 60MHz 16-QAM - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 38 of 169

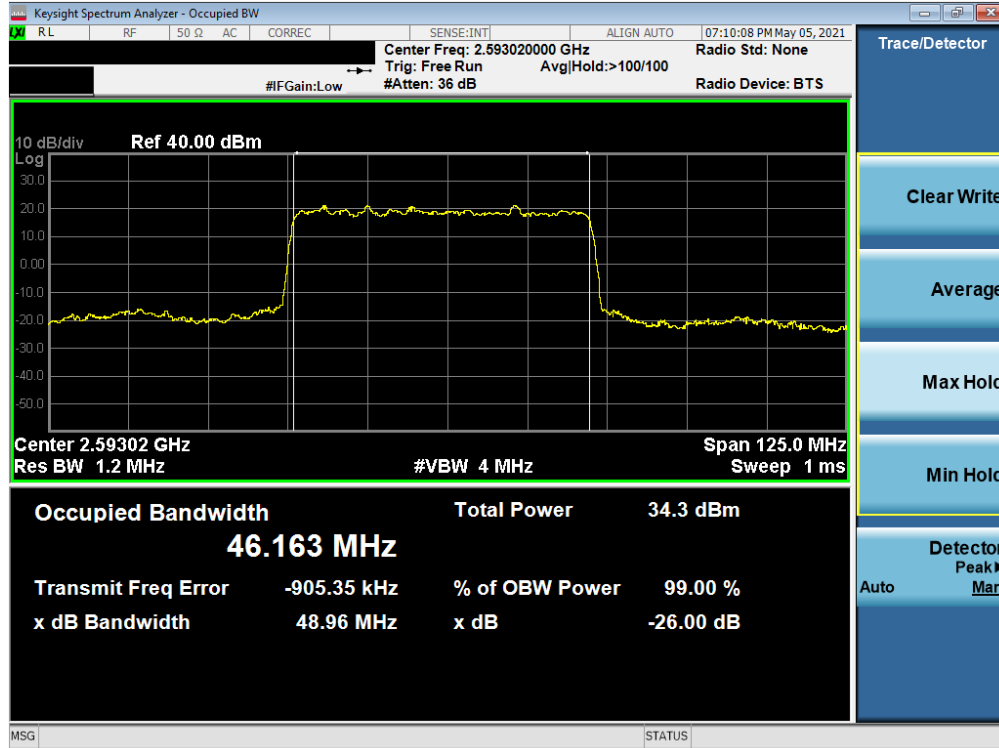


Plot 7-47. Occupied Bandwidth Plot (NR Band n41 - 50MHz $\pi/2$ BPSK - Full RB)

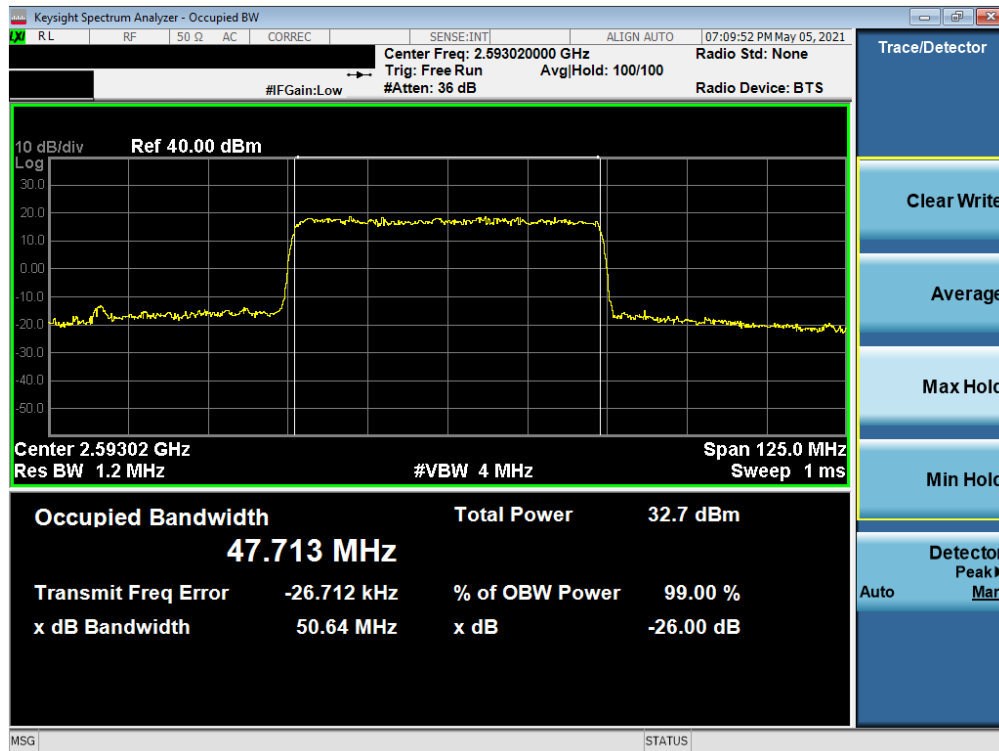


Plot 7-48. Occupied Bandwidth Plot (NR Band n41 - 50MHz QPSK - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 39 of 169

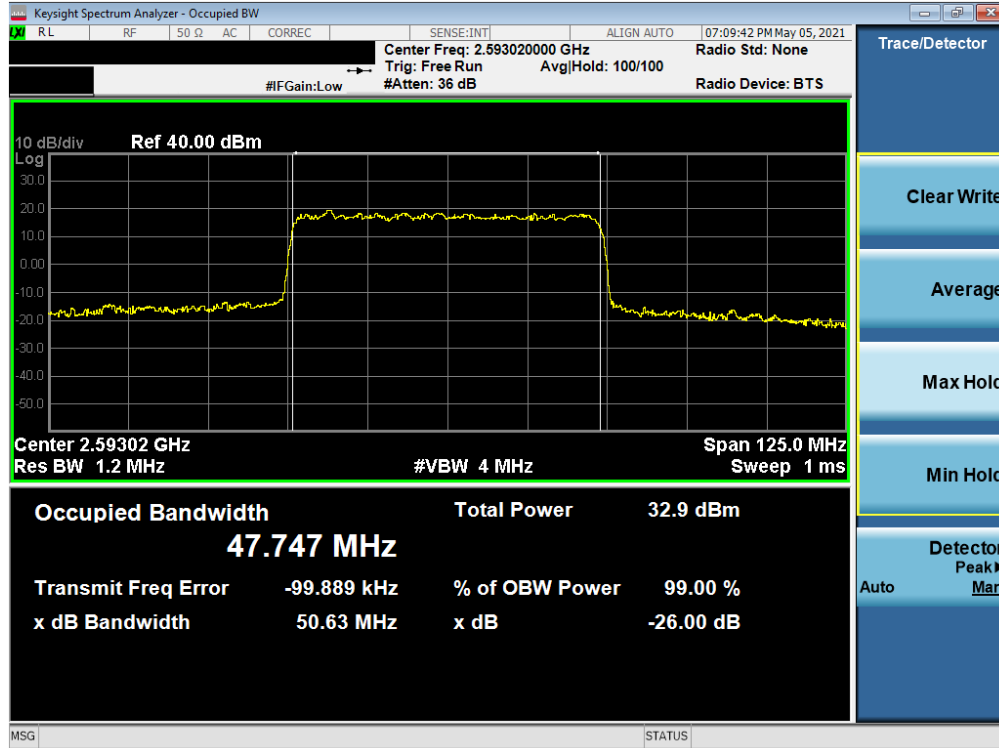


Plot 7-49. Occupied Bandwidth Plot (NR Band n41 - 50MHz 16-QAM - Full RB)

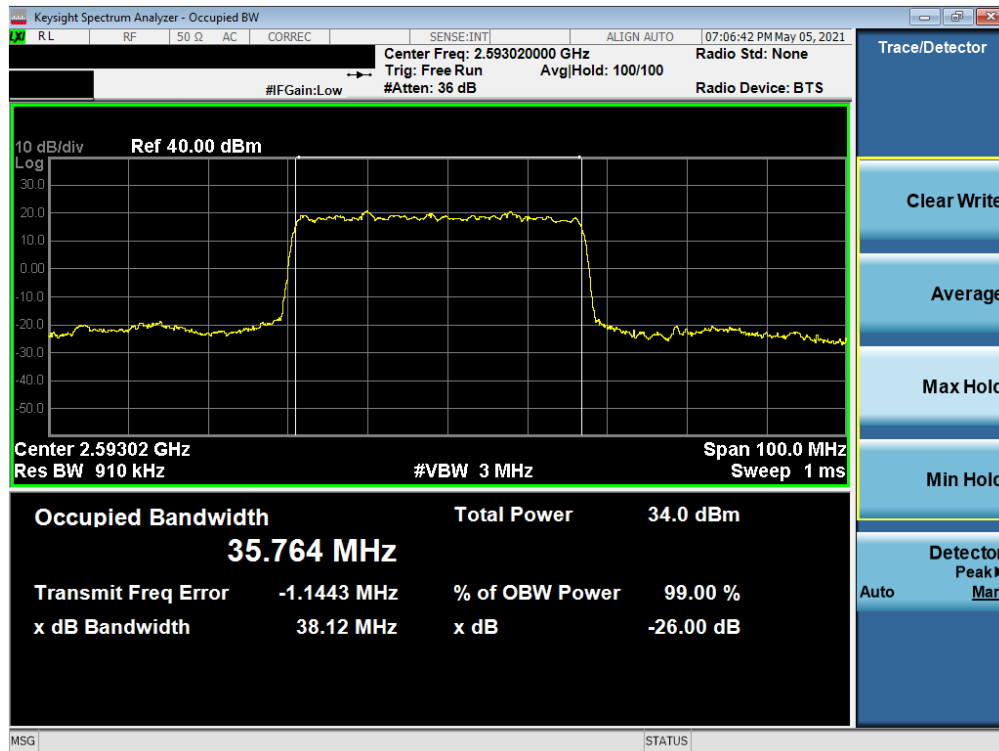


Plot 7-50. Occupied Bandwidth Plot (NR Band n41 - 40MHz $\pi/2$ BPSK - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 40 of 169

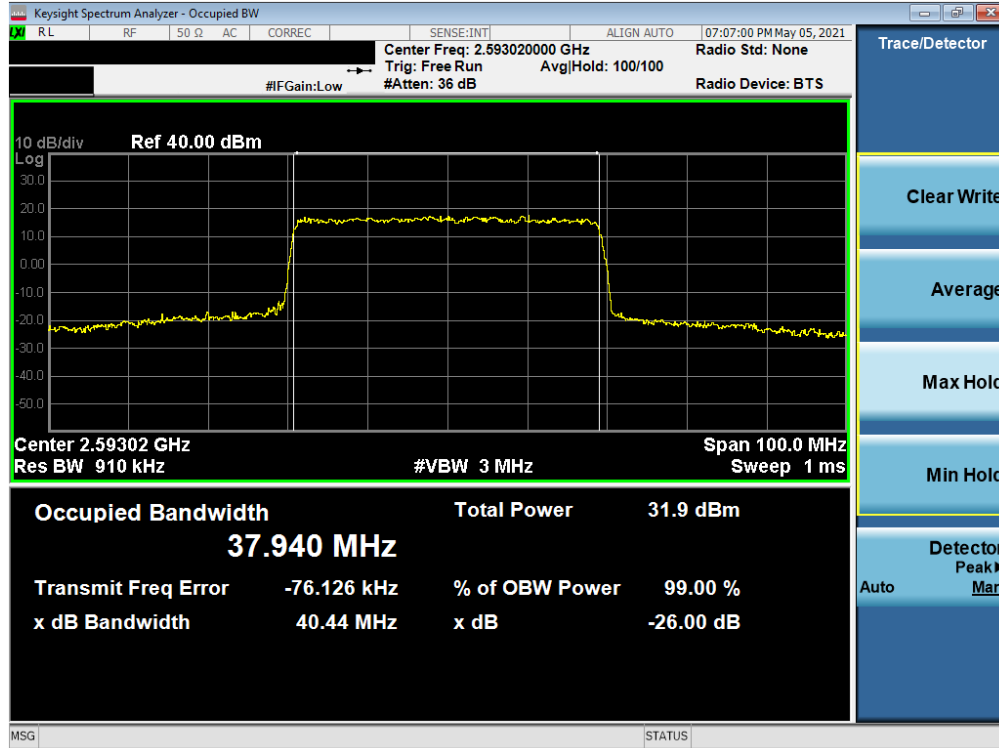


Plot 7-51. Occupied Bandwidth Plot (NR Band n41 - 40MHz QPSK - Full RB)

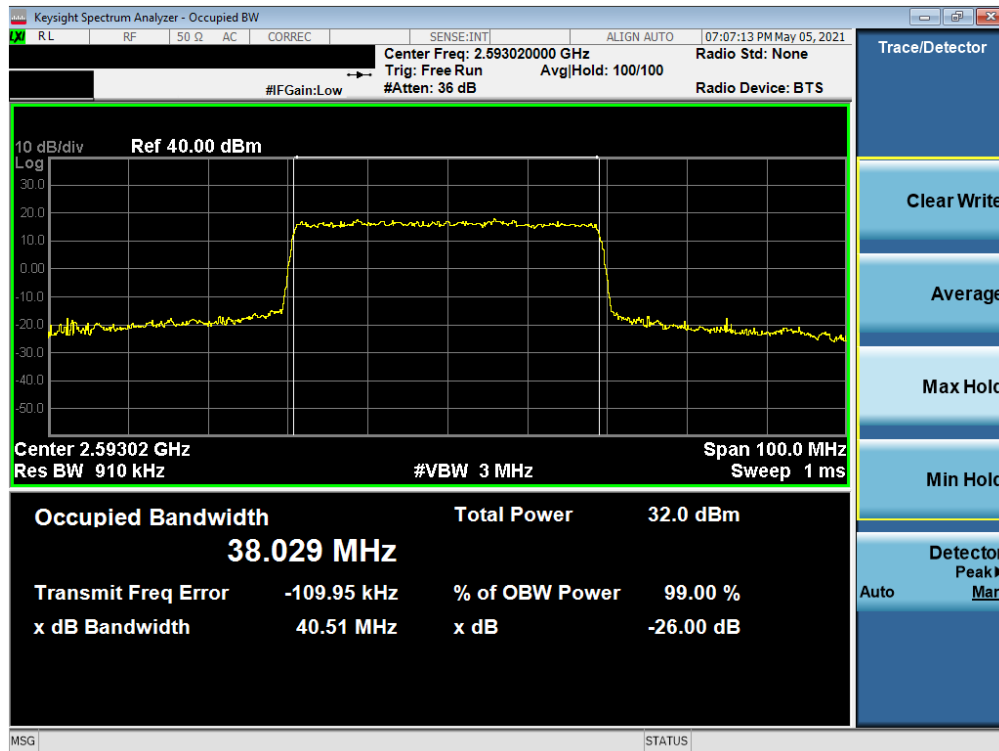


Plot 7-52. Occupied Bandwidth Plot (NR Band n41 - 40MHz 16-QAM - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 41 of 169

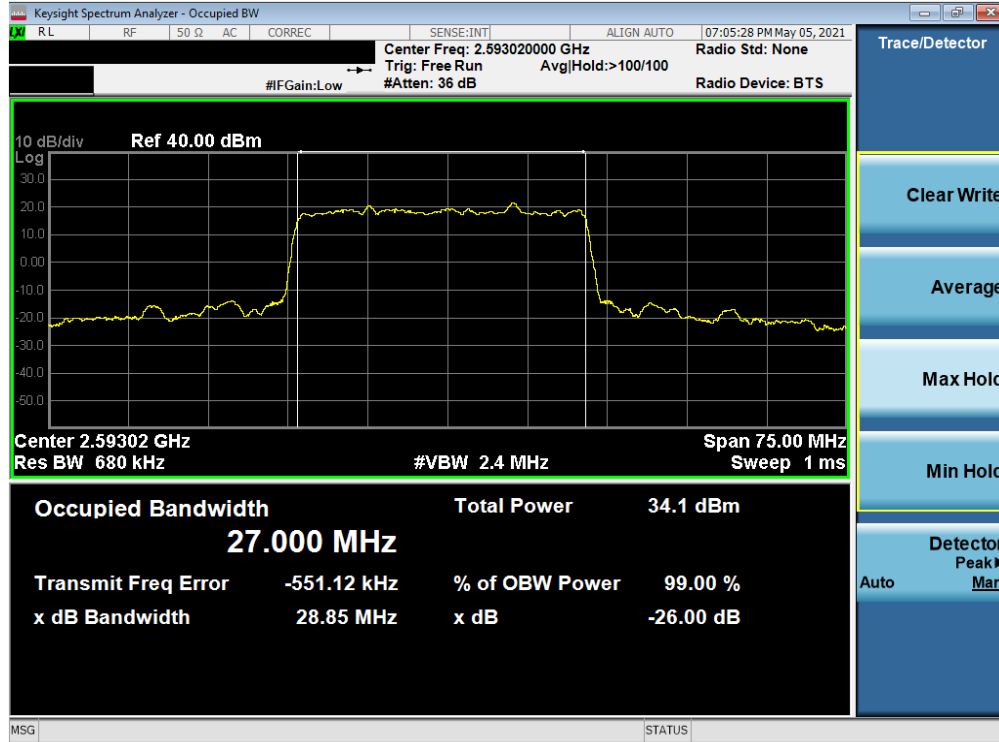


Plot 7-53. Occupied Bandwidth Plot (NR Band n41 - 30MHz $\pi/2$ BPSK - Full RB)

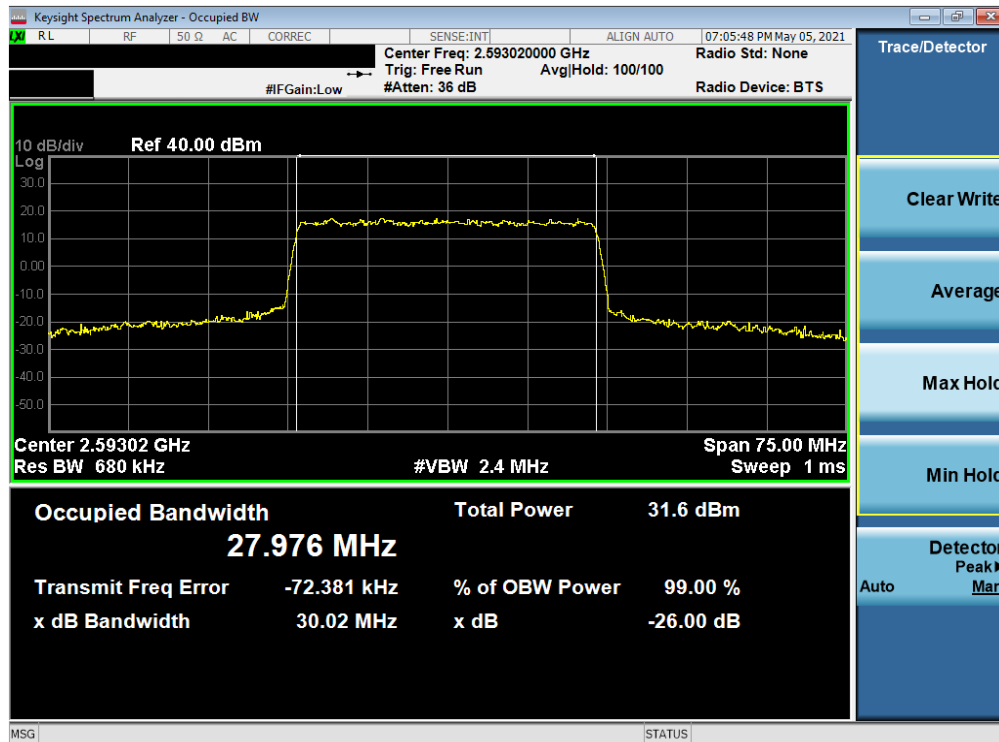


Plot 7-54. Occupied Bandwidth Plot (NR Band n41 - 30MHz QPSK - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 42 of 169

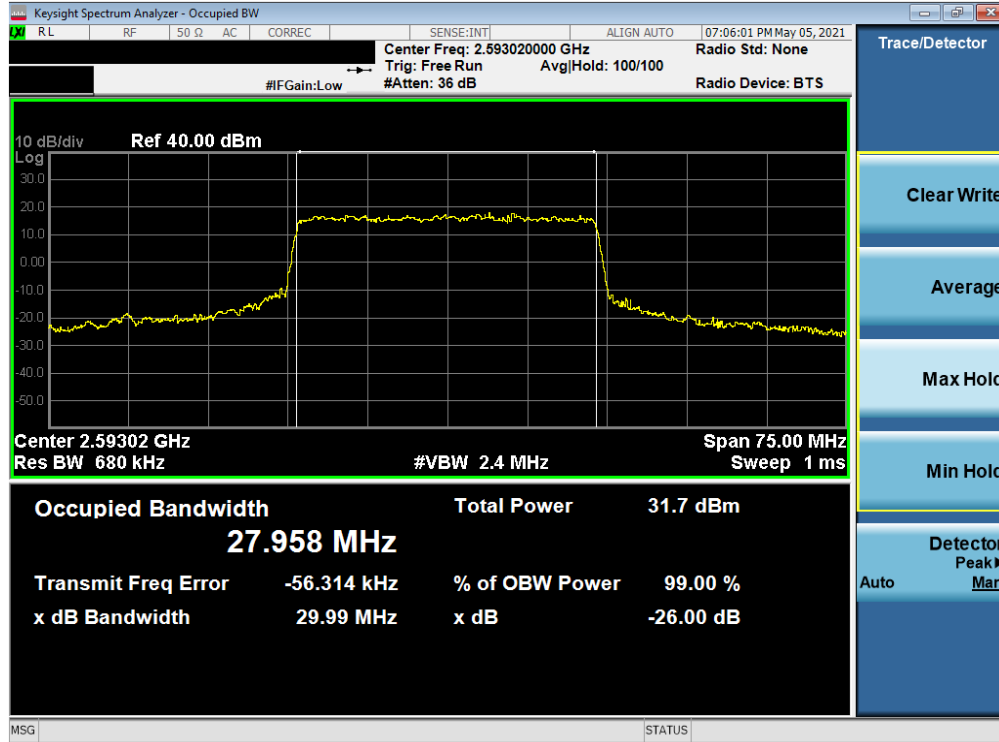

Plot 7-55. Occupied Bandwidth Plot (NR Band n41 - 30MHz 16-QAM - Full RB)

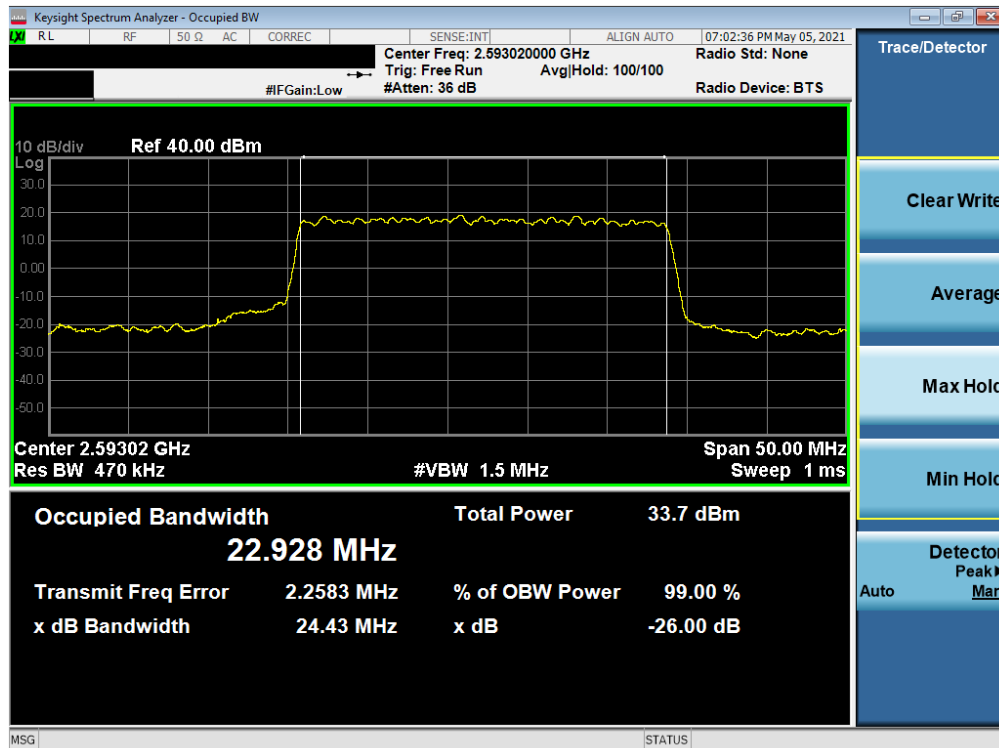

Plot 7-56. Occupied Bandwidth Plot (NR Band n41 - 20MHz $\pi/2$ BPSK - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 43 of 169



Plot 7-57. Occupied Bandwidth Plot (NR Band n41 - 20MHz QPSK - Full RB)



Plot 7-58. Occupied Bandwidth Plot (NR Band n41 - 20MHz 16-QAM - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 44 of 169

NR Band n41 (PC3)



FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 45 of 169



Plot 7-61. Occupied Bandwidth Plot (NR Band n41 - 100MHz 16-QAM - Full RB)




Plot 7-62. Occupied Bandwidth Plot (NR Band n41 - 90MHz $\pi/2$ BPSK - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 46 of 169




Plot 7-63. Occupied Bandwidth Plot (NR Band n41 - 90MHz QPSK - Full RB)

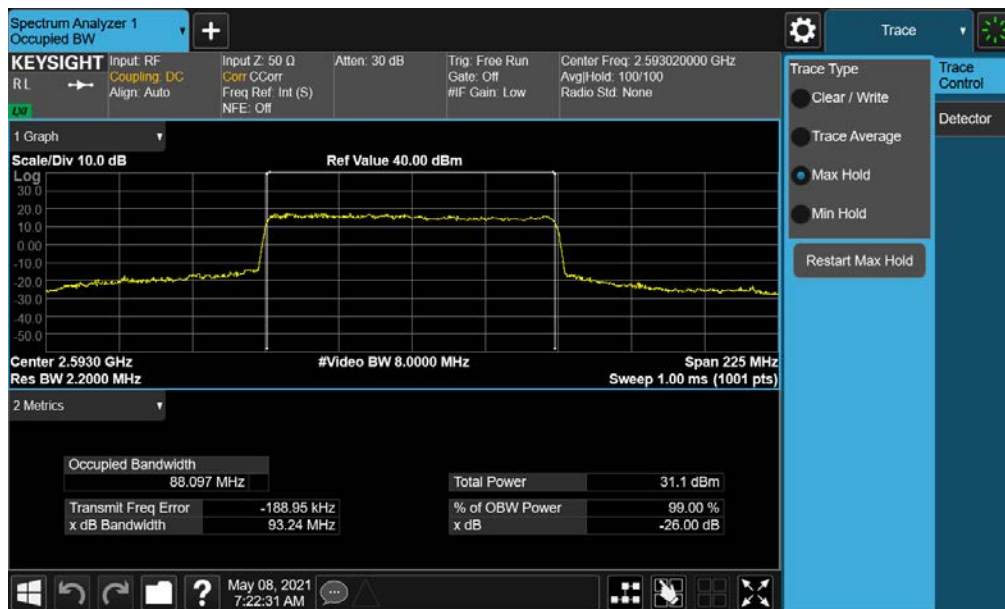

Plot 7-64. Occupied Bandwidth Plot (NR Band n41 - 90MHz 16-QAM - Full RB)


FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 47 of 169

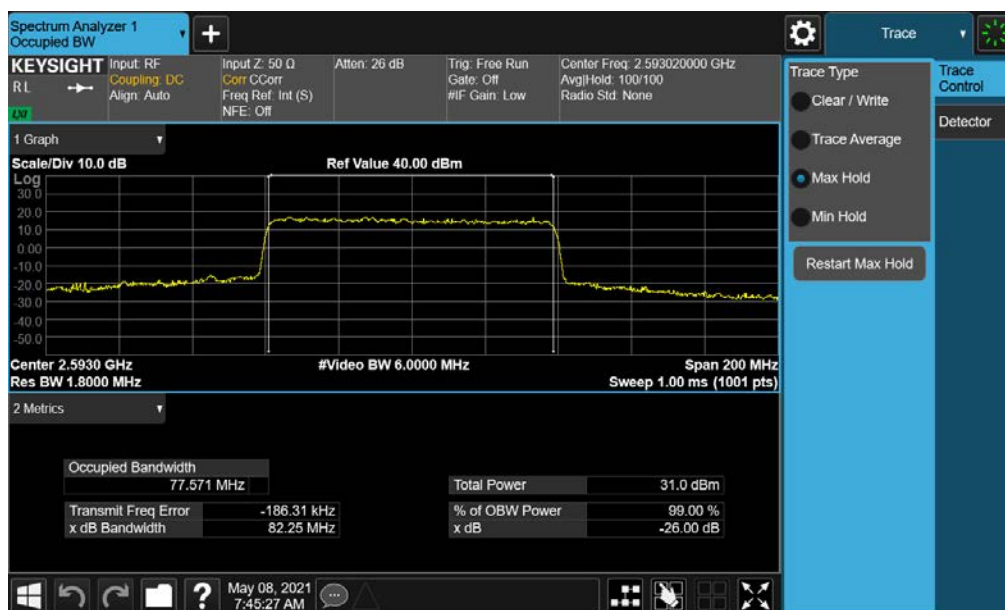


FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 48 of 169




© 2021 PCTEST

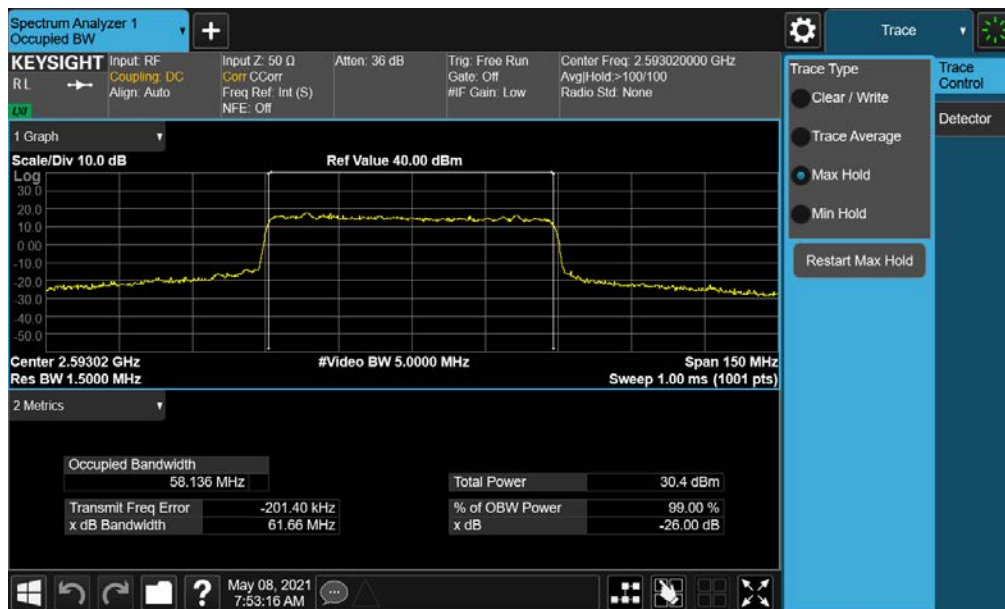

FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 50 of 169

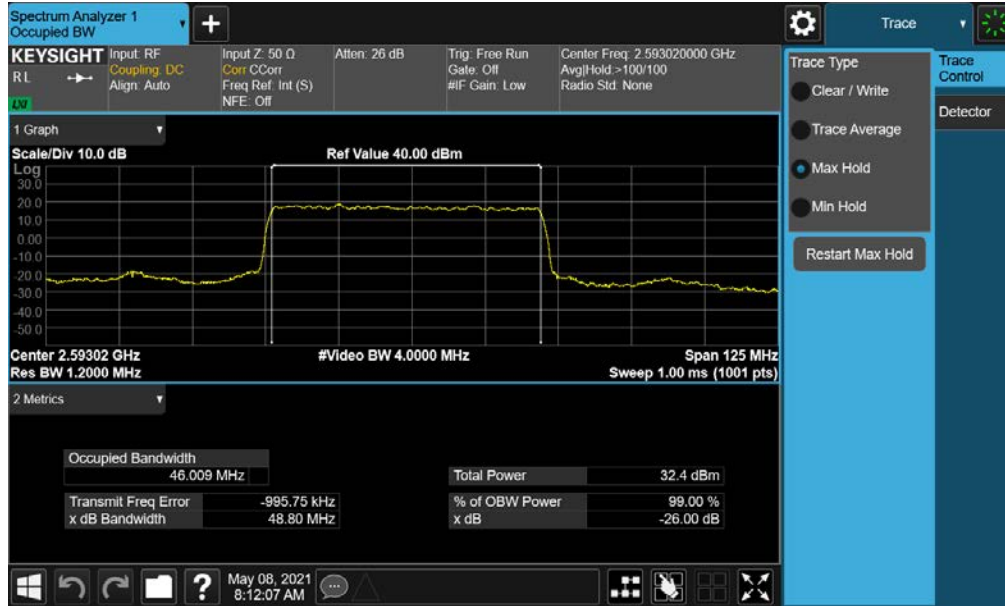


Plot 7-71. Occupied Bandwidth Plot (NR Band n41 - 50MHz $\pi/2$ BPSK - Full RB)

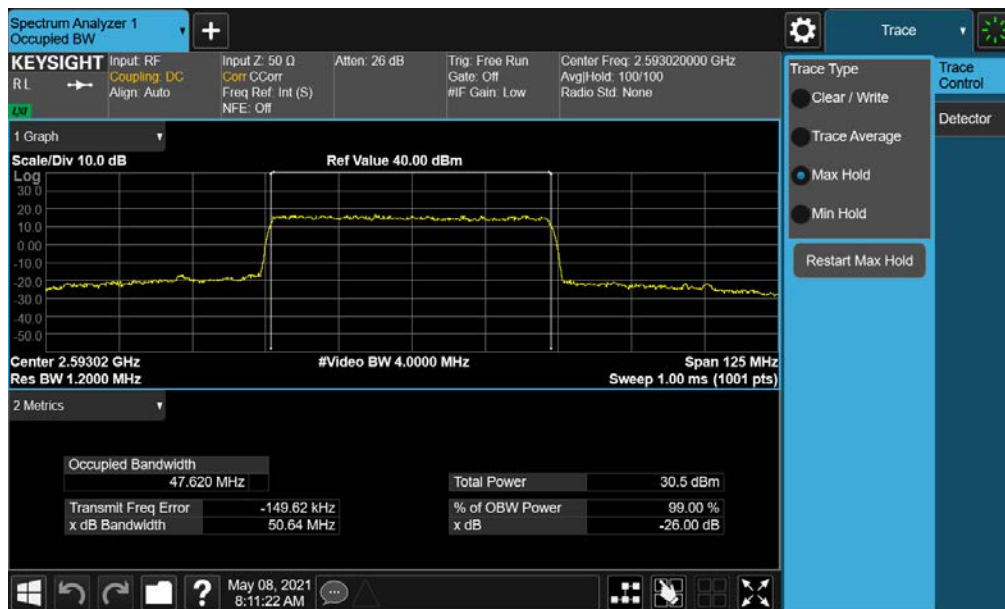


Plot 7-72. Occupied Bandwidth Plot (NR Band n41 - 50MHz QPSK - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 51 of 169

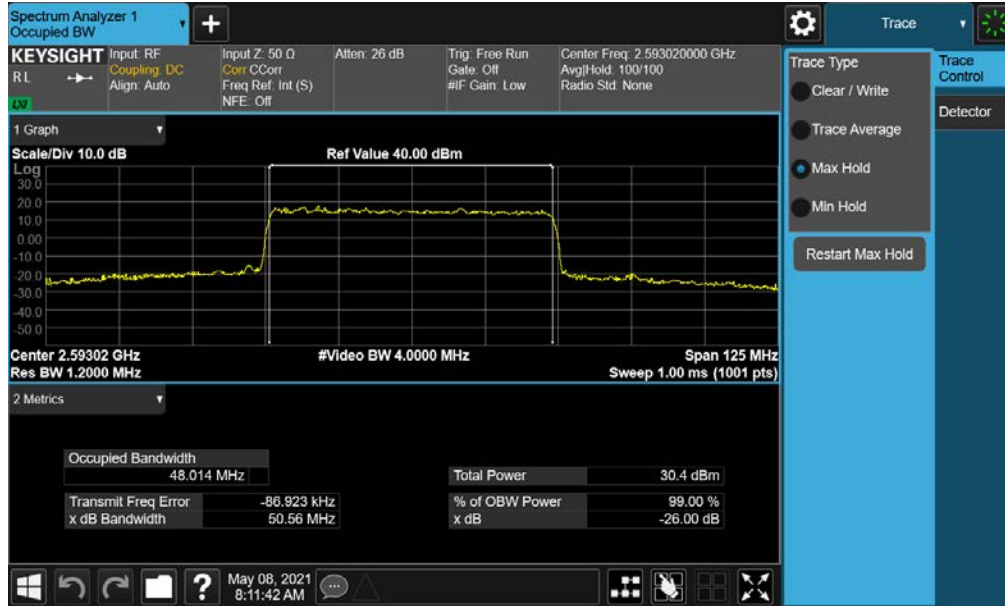


Plot 7-73. Occupied Bandwidth Plot (NR Band n41 - 50MHz 16-QAM - Full RB)

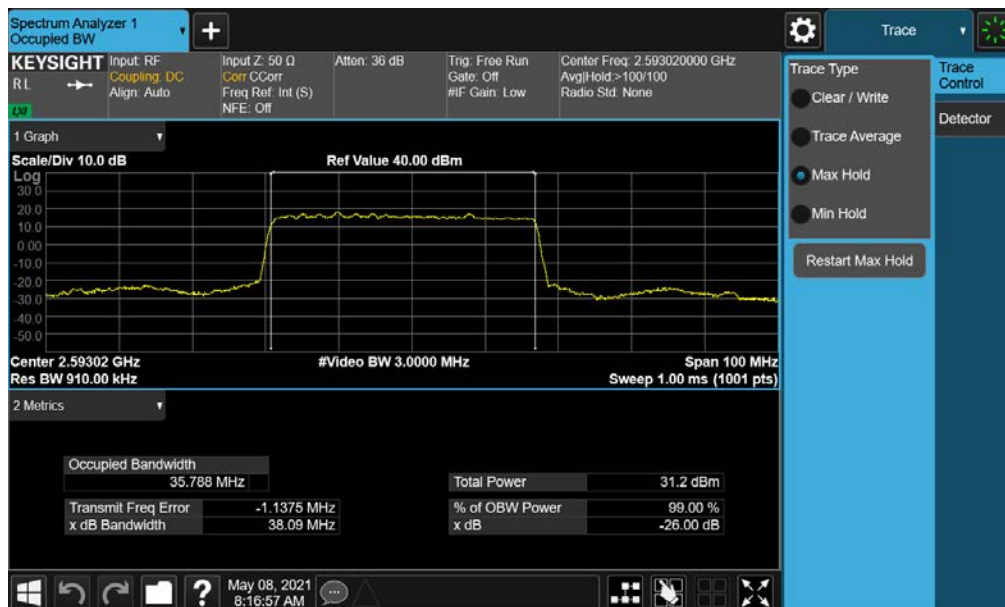


Plot 7-74. Occupied Bandwidth Plot (NR Band n41 - 40MHz $\pi/2$ BPSK - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 52 of 169

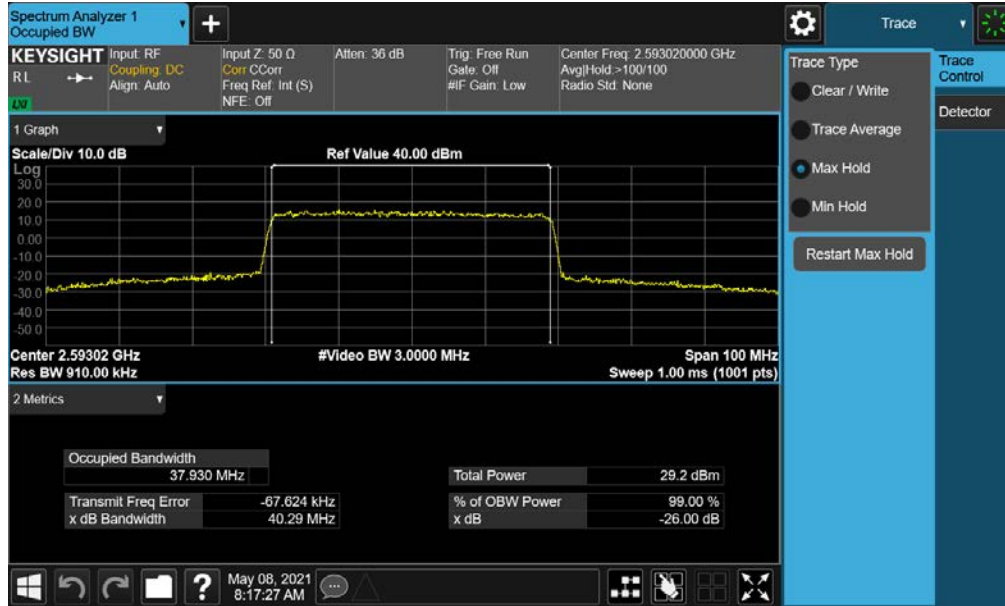

Plot 7-75. Occupied Bandwidth Plot (NR Band n41 - 40MHz QPSK - Full RB)

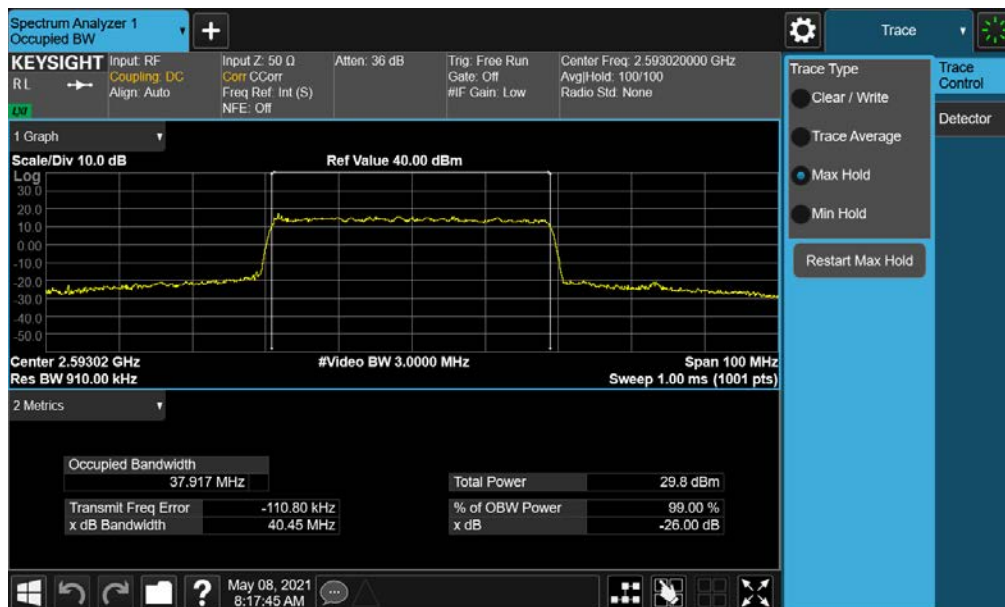

Plot 7-76. Occupied Bandwidth Plot (NR Band n41 - 40MHz 16-QAM - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 53 of 169



Plot 7-77. Occupied Bandwidth Plot (NR Band n41 - 30MHz $\pi/2$ BPSK - Full RB)




Plot 7-78. Occupied Bandwidth Plot (NR Band n41 - 30MHz QPSK - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 54 of 169





Plot 7-79. Occupied Bandwidth Plot (NR Band n41 - 30MHz 16-QAM - Full RB)

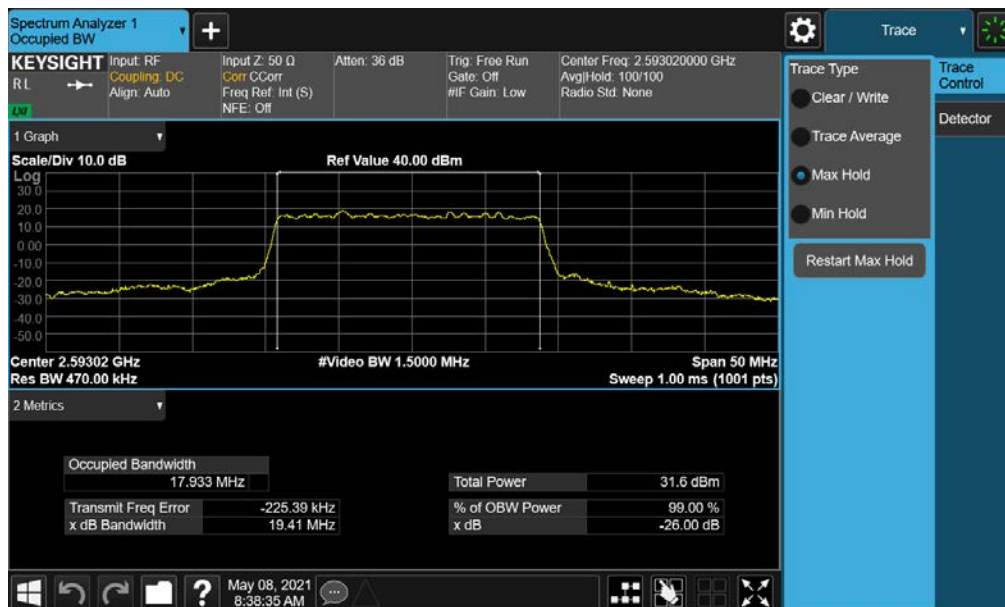

Plot 7-80. Occupied Bandwidth Plot (NR Band n41 - 20MHz $\pi/2$ BPSK - Full RB)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 55 of 169

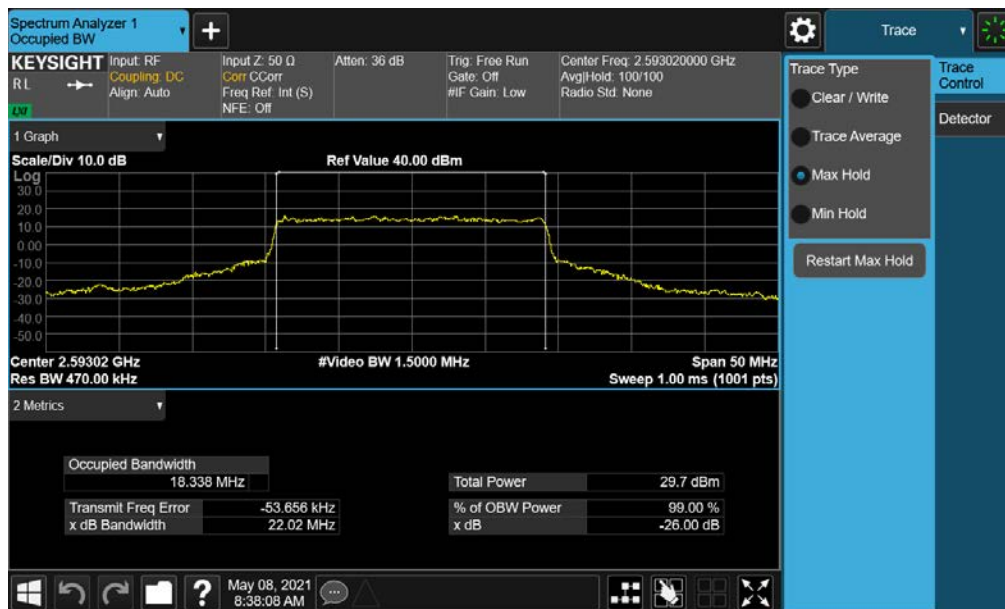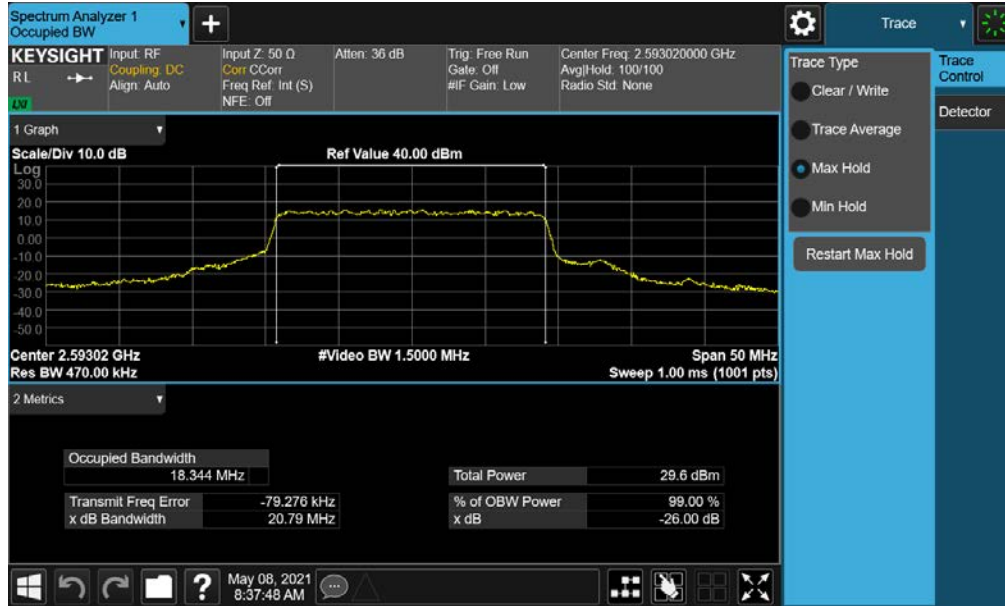

FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 56 of 169

7.4 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

For Band 30, the minimum permissible attenuation level of any spurious emission <2288MHz and >2365MHz is $70 + 10 \log_{10}(P_{\text{Watts}})$.

For Band 7 and 41, the minimum permissible attenuation level of any spurious emission is $55 + 10 \log_{10}(P_{\text{Watts}})$.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

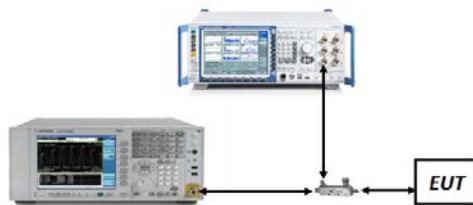



Figure 7-3. Test Instrument & Measurement Setup

Test Notes


1. Per Part 27, RSS-195 and RSS-199, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1MHz for measurements above 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 57 of 169

LTE Band 30

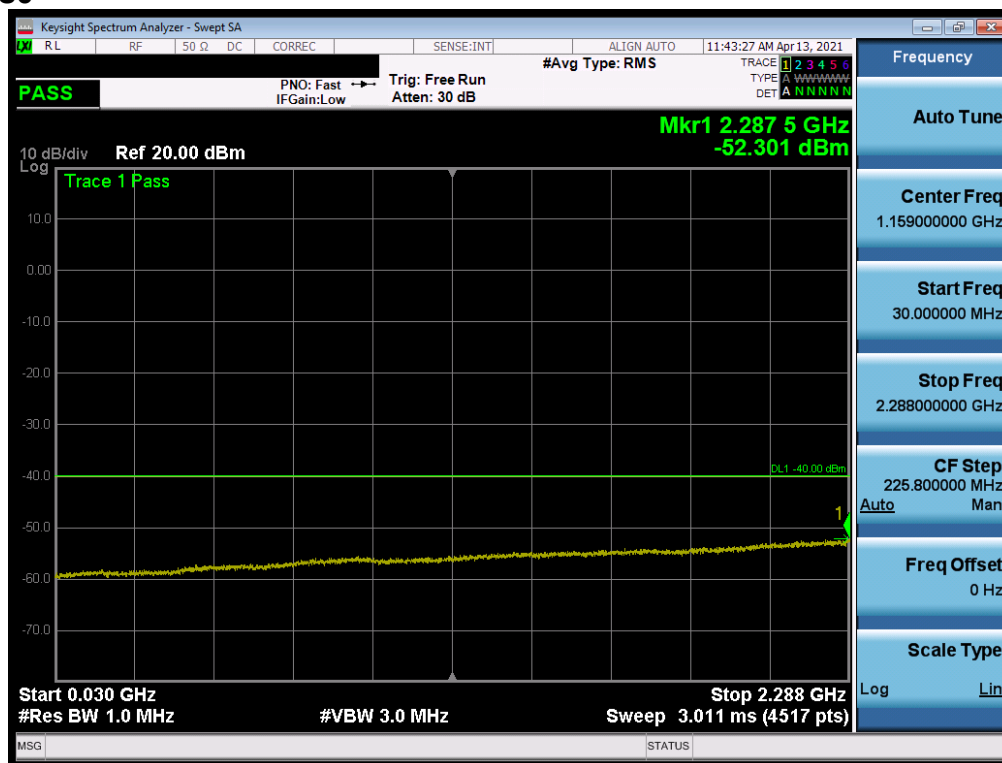


Plot 7-83. Conducted Spurious Plot (LTE Band 30 - 10MHz QPSK - RB Size 1, RB Offset 0)

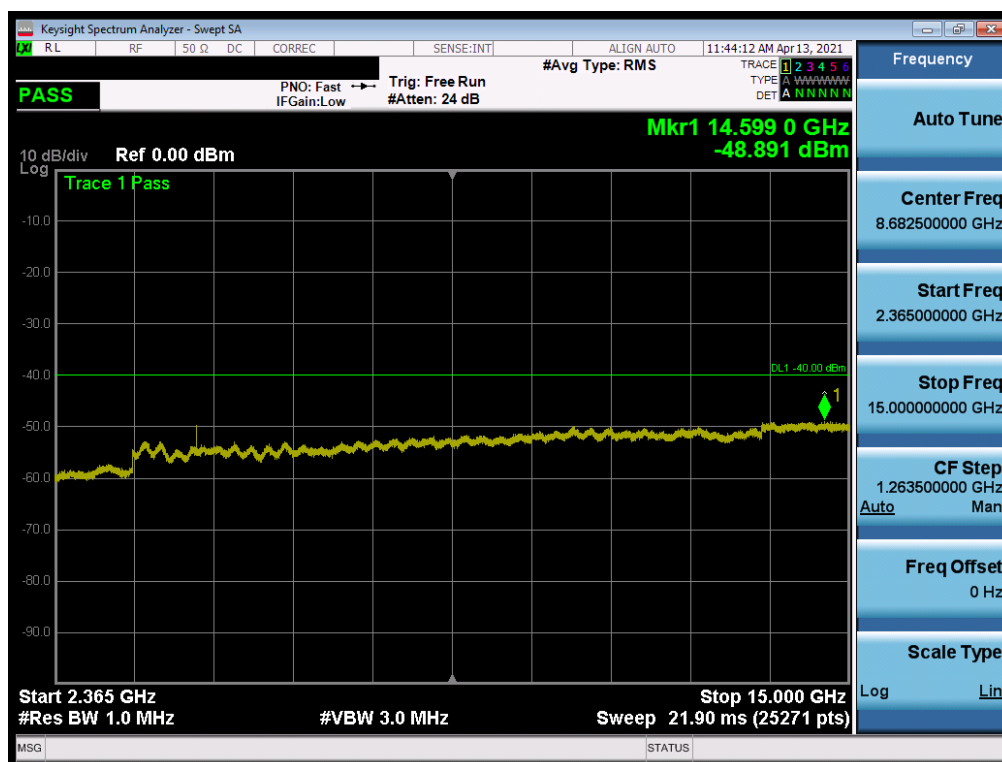


Plot 7-84. Conducted Spurious Plot (LTE Band 30 - 10MHz QPSK - RB Size 1, RB Offset 0)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 58 of 169

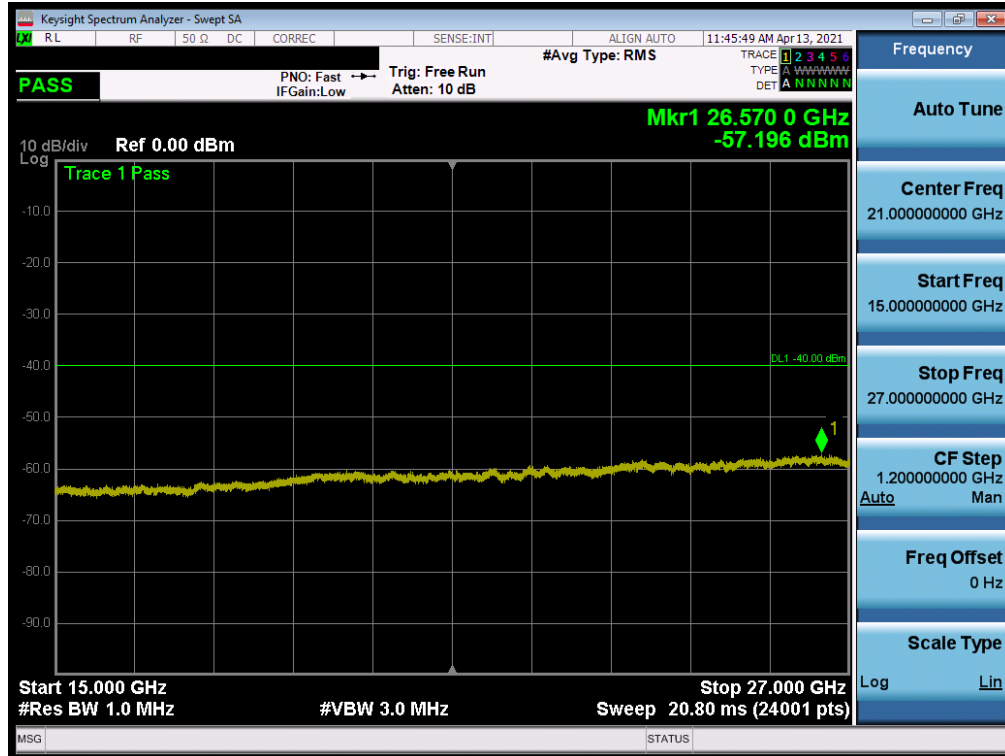


Plot 7-85. Conducted Spurious Plot (LTE Band 30 - 10MHz QPSK - RB Size 1, RB Offset 0)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 59 of 169

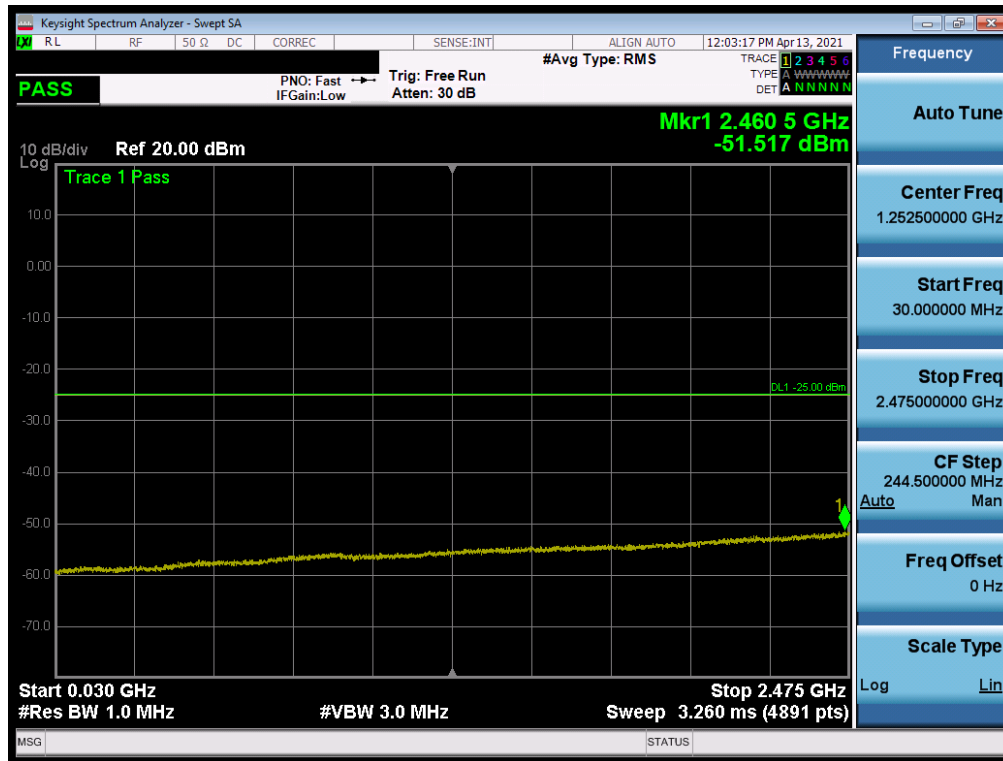


Plot 7-86. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

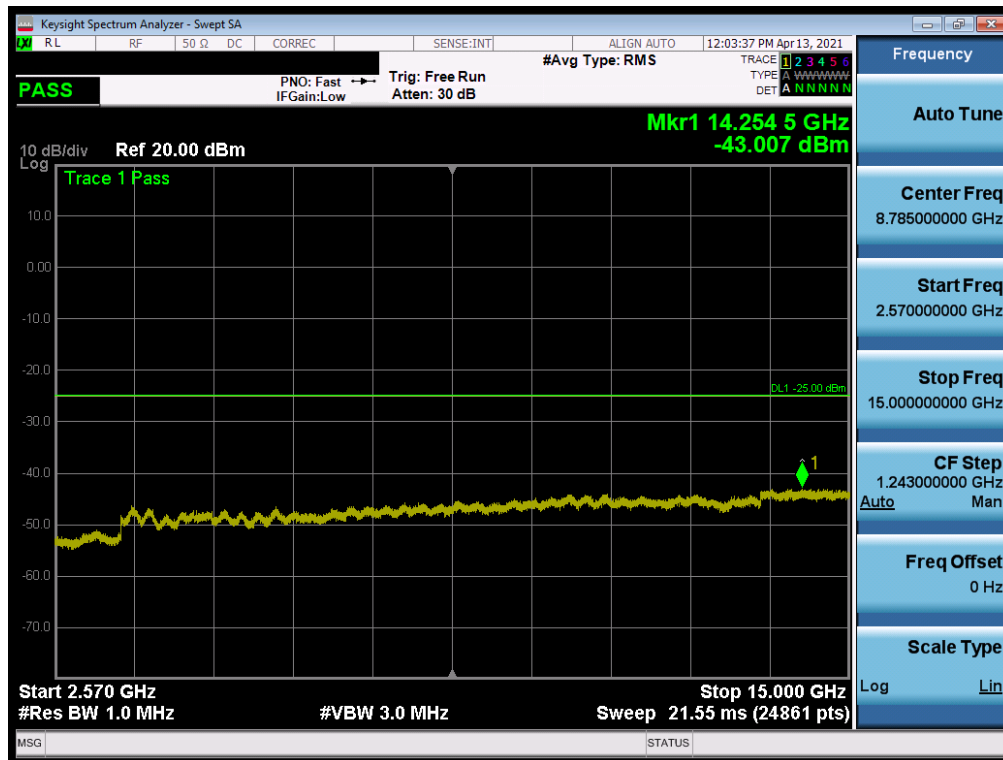


Plot 7-87. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of Samsung	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 60 of 169

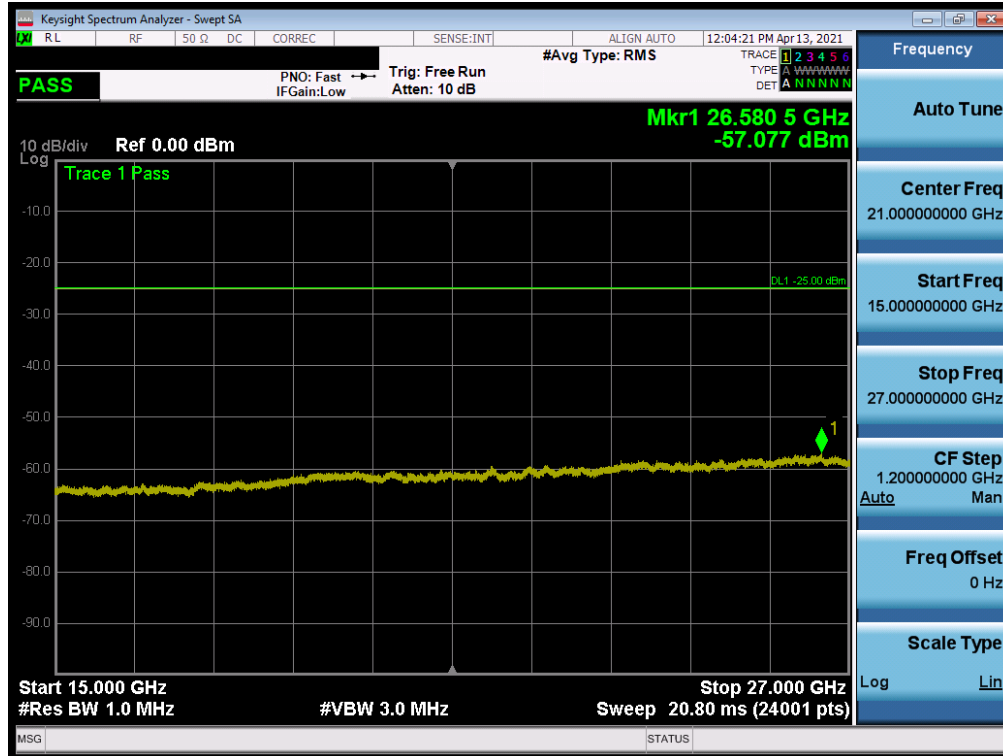


Plot 7-88. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

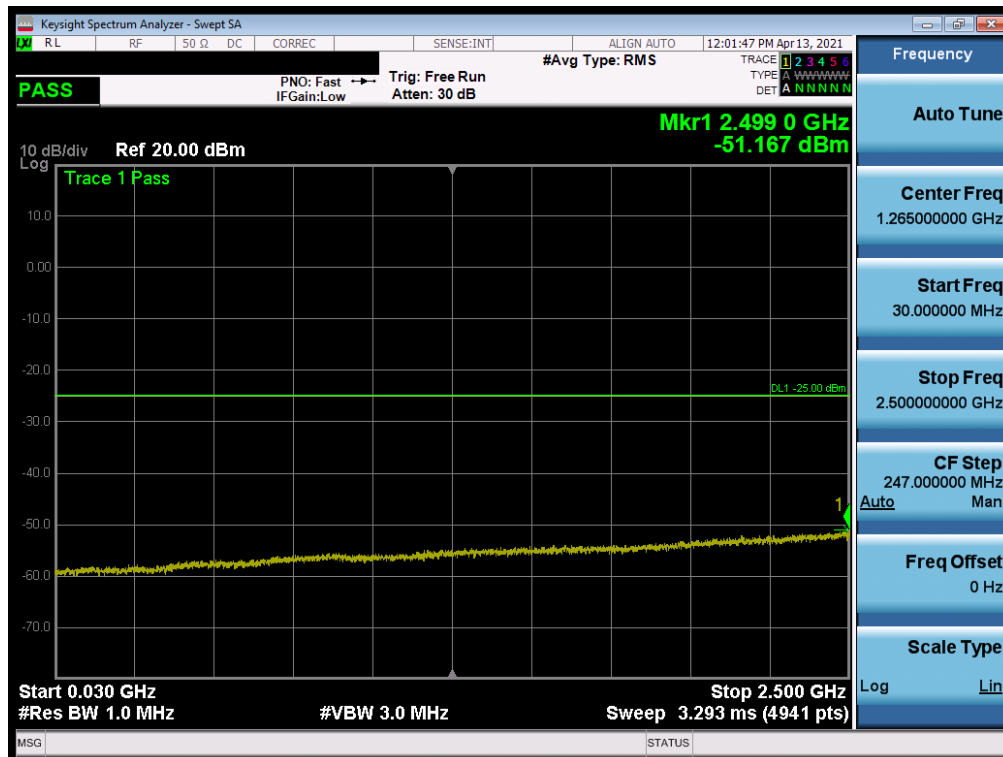


Plot 7-89. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 61 of 169

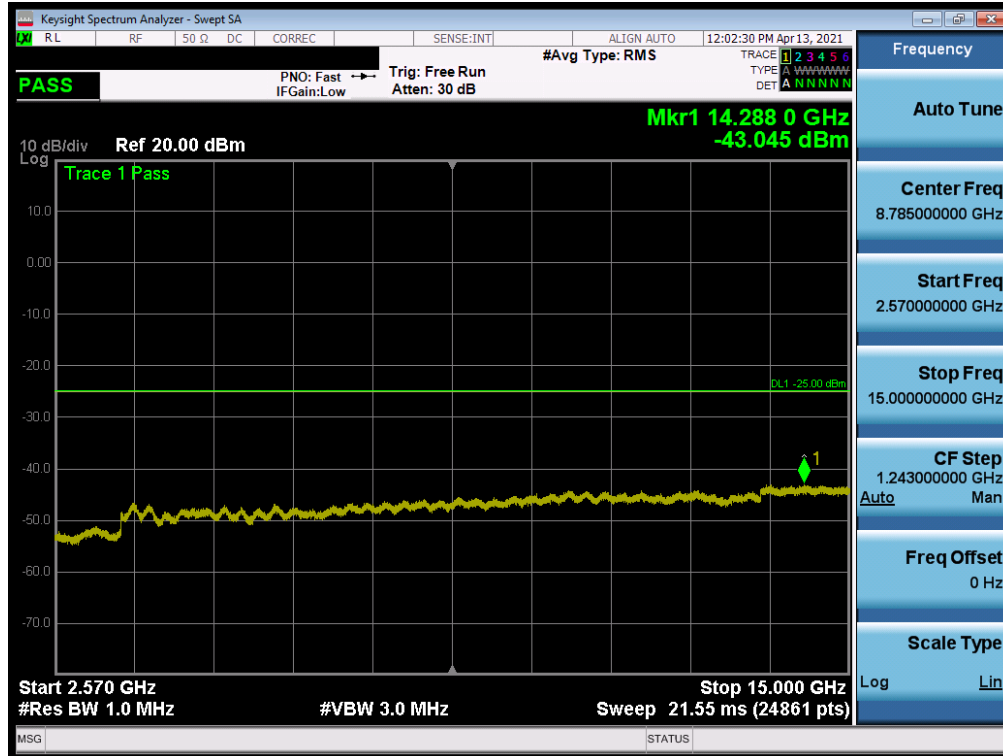


Plot 7-90. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

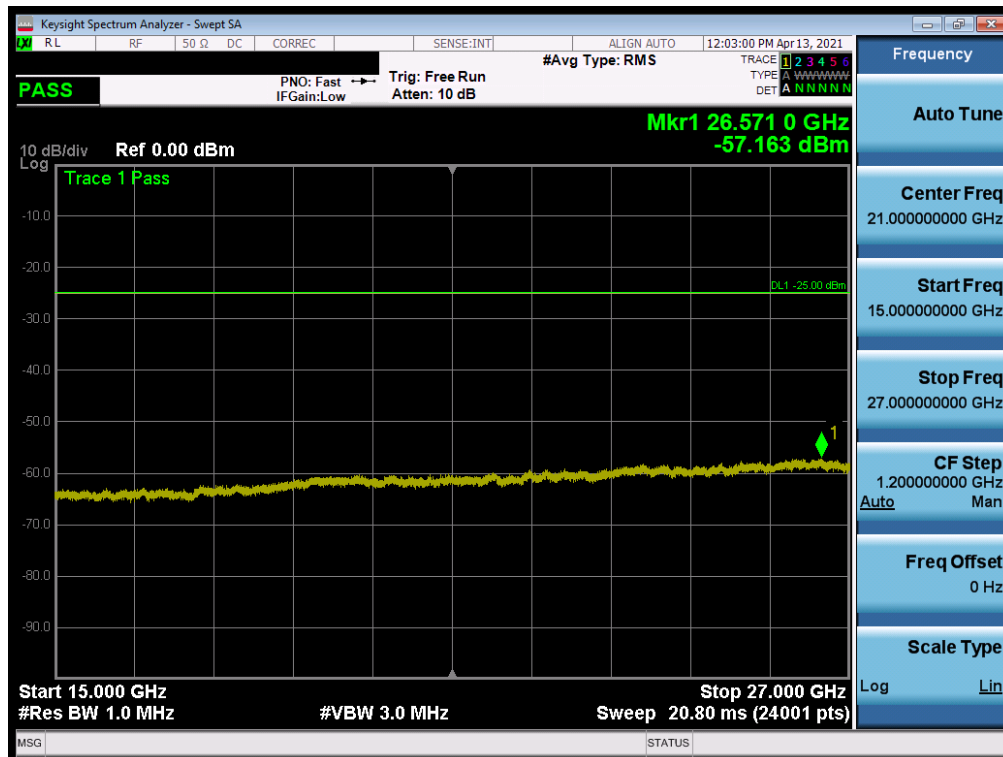


Plot 7-91. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 62 of 169

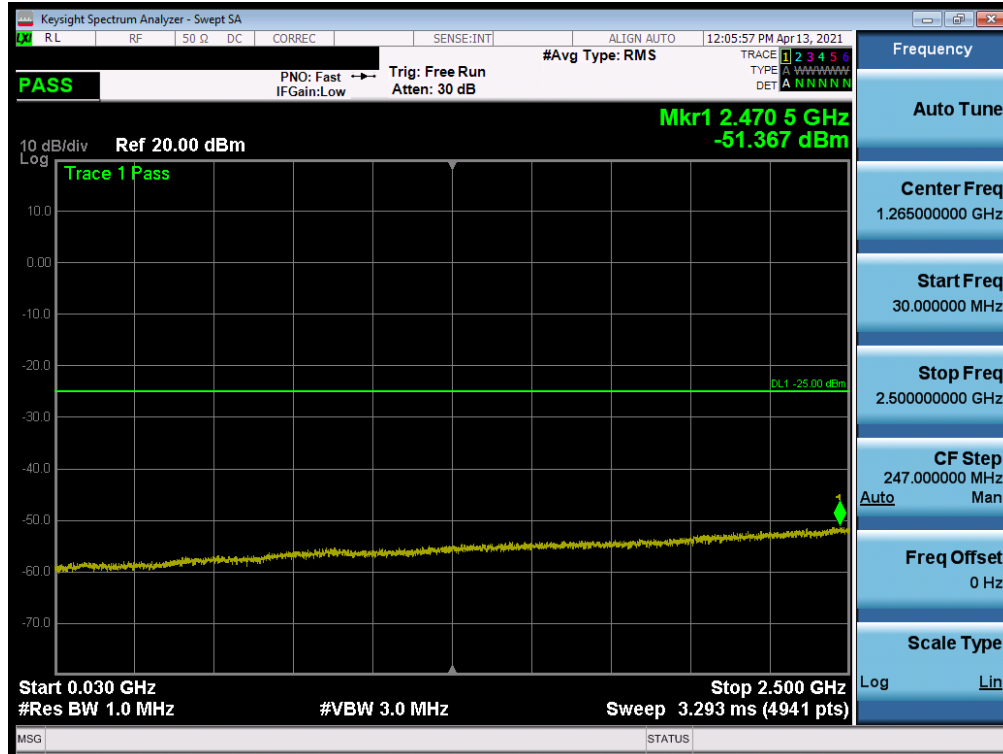


Plot 7-92. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

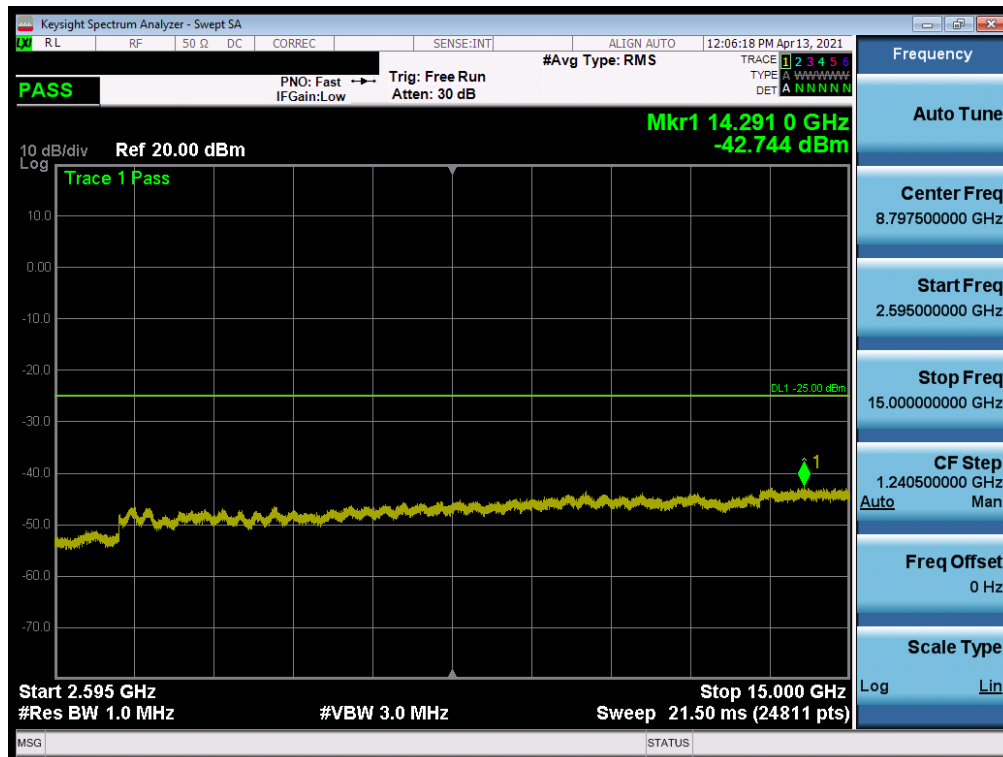

Plot 7-93. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 63 of 169

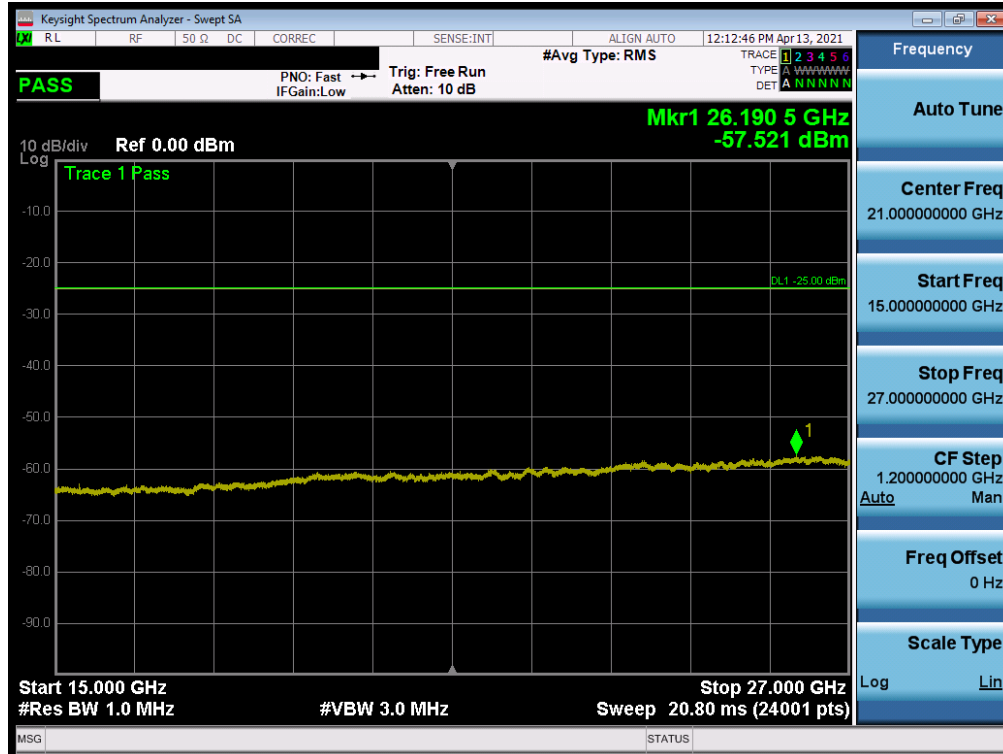

Plot 7-94. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: A3LSMF711U1	PCTEST Proud to be part of	PART 27 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2107290086-06.A3L	Test Dates: 4/12/2021 – 6/11/2021	EUT Type: Portable Handset		Page 64 of 169