



**ELEMENT MATERIALS TECHNOLOGY,
Columbia MD**

(formerly PCTEST)

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.element.com>

PART 27 MEASUREMENT REPORT

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

2/24/2026 - 5/15/2026

Test Report Issue Date:

6/2/2026

Test Site/Location:

Element Lab., Columbia, MD, USA

Element Lab., Yongin-Si, Gyeonggi-do, South Korea

Test Report Serial No.:

1M2604240033-04-R1.A3L

FCC ID:

A3LSMF776JPN

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SC-55G

Additional Model(s):

SCG40

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part:

27

Test Procedure(s):

ANSI C63.26-2015, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N:1M2604240033-04-R1.A3L) supersedes and replaces the previously issued test report (S/N: 1M2604240033-04.A3L) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President



FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 1 of 145

© 2026 ELEMENT

V11.3 5/14/2025

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

TEST REPORT REVISION HISTORY

Rev. No.	Description	Issue Date	Revised By
-	Initial Release	5/22/2026	WKR0000005883
1	Addressed comments made by TCB reviewer	6/2/2026	WKR0000005883

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 2 of 145

TABLE OF CONTENTS

1.0	INTRODUCTION	8
1.1	Scope	8
1.2	Element Test Location.....	8
1.3	Test Facility / Accreditations.....	8
2.0	PRODUCT INFORMATION.....	9
2.1	Equipment Description	9
2.2	Device Capabilities.....	9
2.3	Test Configuration	9
2.4	Duty Cycle Information	10
2.5	Software and Firmware	10
2.6	EMI Suppression Device(s)/Modifications	10
3.0	DESCRIPTION OF TESTS	11
3.1	Evaluation Procedure	11
3.2	Radiated Power and Radiated Spurious Emissions	11
4.0	MEASUREMENT UNCERTAINTY	12
5.0	TEST EQUIPMENT CALIBRATION DATA	13
6.0	SAMPLE EMISSION DESIGNATORS	16
7.0	TEST RESULTS	17
7.1	Summary	17
7.2	Conducted Output Power Data	18
7.3	Occupied Bandwidth	25
7.4	Spurious and Harmonic Emissions at Antenna Terminal	82
7.5	Band Edge Emissions at Antenna Terminal	98
7.6	Radiated Power (EIRP)	112
7.7	Radiated Spurious Emissions Measurements	118
7.8	Frequency Stability / Temperature Variation	139
8.0	CONCLUSION	142
9.0	APPENDIX A – DATA REFERENCING RESULTS	143

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 3 of 145

PART 27 MEASUREMENT REPORT

Antenna-1						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
ULCA LTE Band 41(PC3)	40 MHz	QPSK	2506.0 - 2680.0	0.154	21.89	37M9G7D
		16QAM	2506.0 - 2680.0	0.072	18.60	37M8W7D
LTE Band 41(PC3)	20 MHz	QPSK	2506.0 - 2680.0	0.206	23.14	18M0G7D
		16QAM	2506.0 - 2680.0	0.169	22.28	18M0W7D
	15 MHz	QPSK	2503.5 - 2682.5	0.205	23.12	13M6G7D
		16QAM	2503.5 - 2682.5	0.169	22.28	13M5W7D
	10 MHz	QPSK	2501.0 - 2685.0	0.211	23.24	9M04G7D
		16QAM	2501.0 - 2685.0	0.165	22.17	9M01W7D
	5 MHz	QPSK	2498.5 - 2687.5	0.204	23.10	4M53G7D
		16QAM	2498.5 - 2687.5	0.170	22.29	4M53W7D

Overview Table LTE Band Ant 1

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT		Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.				Page 4 of 145

Antenna-1						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n41(PC2)	100 MHz	TT/2 BPSK	2546.0 - 2640.0	0.331	25.19	96M7G7D
		QPSK	2546.0 - 2640.0	0.322	25.07	97M7G7D
		16QAM	2546.0 - 2640.0	0.267	24.26	97M8W7D
	90 MHz	TT/2 BPSK	2541.0 - 2645.0	0.328	25.16	87M2G7D
		QPSK	2541.0 - 2645.0	0.319	25.03	87M6G7D
		16QAM	2541.0 - 2645.0	0.257	24.09	87M8W7D
	80 MHz	TT/2 BPSK	2536.0 - 2650.0	0.328	25.16	77M2G7D
		QPSK	2536.0 - 2650.0	0.311	24.92	77M8G7D
		16QAM	2536.0 - 2650.0	0.254	24.05	77M6W7D
	70 MHz	TT/2 BPSK	2531.0 - 2655.0	0.328	25.15	64M4G7D
		QPSK	2531.0 - 2655.0	0.316	24.99	67M6G7D
		16QAM	2531.0 - 2655.0	0.248	23.94	67M6W7D
	60 MHz	TT/2 BPSK	2526.0 - 2660.0	0.318	25.02	58M1G7D
		QPSK	2526.0 - 2660.0	0.302	24.80	58M1G7D
		16QAM	2526.0 - 2660.0	0.243	23.86	58M0W7D
	50 MHz	TT/2 BPSK	2521.0 - 2665.0	0.337	25.27	45M9G7D
		QPSK	2521.0 - 2665.0	0.319	25.03	47M6G7D
		16QAM	2521.0 - 2665.0	0.259	24.13	47M7W7D
	45 MHz	TT/2 BPSK	2518.5 - 2667.5	0.334	25.23	38M7G7D
		QPSK	2518.5 - 2667.5	0.315	24.98	42M7G7D
		16QAM	2518.5 - 2667.5	0.261	24.16	42M7W7D
	40 MHz	TT/2 BPSK	2516.0 - 2670.0	0.320	25.05	36M0G7D
		QPSK	2516.0 - 2670.0	0.303	24.81	38M0G7D
		16QAM	2516.0 - 2670.0	0.251	24.00	38M1W7D
	35 MHz	TT/2 BPSK	2513.5 - 2672.5	0.326	25.13	32M3G7D
		QPSK	2513.5 - 2672.5	0.307	24.87	32M9G7D
		16QAM	2513.5 - 2672.5	0.253	24.02	32M9W7D
	30 MHz	TT/2 BPSK	2511.0 - 2675.0	0.325	25.12	27M0G7D
		QPSK	2511.0 - 2675.0	0.314	24.96	27M9G7D
		16QAM	2511.0 - 2675.0	0.246	23.91	28M0W7D
	25 MHz	TT/2 BPSK	2508.5 - 2677.5	0.327	25.14	23M0G7D
		QPSK	2508.5 - 2677.5	0.306	24.86	23M3G7D
		16QAM	2508.5 - 2677.5	0.246	23.91	23M3W7D
	20 MHz	TT/2 BPSK	2506.0 - 2680.0	0.325	25.11	18M0G7D
		QPSK	2506.0 - 2680.0	0.307	24.87	18M3G7D
		16QAM	2506.0 - 2680.0	0.250	23.98	18M4W7D
	15 MHz	TT/2 BPSK	2503.5 - 2682.5	0.326	25.13	13M0G7D
		QPSK	2503.5 - 2682.5	0.309	24.90	13M7G7D
		16QAM	2503.5 - 2682.5	0.253	24.03	13M6W7D
	10 MHz	TT/2 BPSK	2501.0 - 2685.0	0.325	25.12	8M67G7D
		QPSK	2501.0 - 2685.0	0.309	24.89	8M66G7D
		16QAM	2501.0 - 2685.0	0.253	24.03	8M72W7D

Overview Table NR Band n41 – Default

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 5 of 145

Antenna-1						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n41(PC2)	100 MHz	TT/2 BPSK	2546.0 - 2640.0	0.340	25.31	97M0G7D
		QPSK	2546.0 - 2640.0	0.333	25.22	97M7G7D
		16QAM	2546.0 - 2640.0	0.258	24.12	97M7W7D
	90 MHz	TT/2 BPSK	2541.0 - 2645.0	0.345	25.38	87M1G7D
		QPSK	2541.0 - 2645.0	0.332	25.21	87M7G7D
		16QAM	2541.0 - 2645.0	0.260	24.14	87M5W7D
	80 MHz	TT/2 BPSK	2536.0 - 2650.0	0.338	25.29	77M3G7D
		QPSK	2536.0 - 2650.0	0.327	25.14	77M7G7D
		16QAM	2536.0 - 2650.0	0.252	24.01	77M5W7D
	70 MHz	TT/2 BPSK	2531.0 - 2655.0	0.341	25.32	64M4G7D
		QPSK	2531.0 - 2655.0	0.324	25.10	67M5G7D
		16QAM	2531.0 - 2655.0	0.252	24.01	67M4W7D
	60 MHz	TT/2 BPSK	2526.0 - 2660.0	0.328	25.16	58M0G7D
		QPSK	2526.0 - 2660.0	0.319	25.04	58M0G7D
		16QAM	2526.0 - 2660.0	0.251	24.00	57M9W7D
	50 MHz	TT/2 BPSK	2521.0 - 2665.0	0.346	25.39	45M8G7D
		QPSK	2521.0 - 2665.0	0.331	25.20	47M6G7D
		16QAM	2521.0 - 2665.0	0.265	24.23	47M6W7D
	45 MHz	TT/2 BPSK	2518.5 - 2667.5	0.349	25.42	38M7G7D
		QPSK	2518.5 - 2667.5	0.334	25.23	42M5G7D
		16QAM	2518.5 - 2667.5	0.260	24.15	42M6W7D
	40 MHz	TT/2 BPSK	2516.0 - 2670.0	0.338	25.28	36M0G7D
		QPSK	2516.0 - 2670.0	0.324	25.10	38M0G7D
		16QAM	2516.0 - 2670.0	0.251	24.00	38M1W7D
	35 MHz	TT/2 BPSK	2513.5 - 2672.5	0.350	25.44	32M2G7D
		QPSK	2513.5 - 2672.5	0.335	25.25	32M9G7D
		16QAM	2513.5 - 2672.5	0.254	24.04	32M9W7D
	30 MHz	TT/2 BPSK	2511.0 - 2675.0	0.346	25.39	27M0G7D
		QPSK	2511.0 - 2675.0	0.335	25.24	27M9G7D
		16QAM	2511.0 - 2675.0	0.268	24.27	28M1W7D
	25 MHz	TT/2 BPSK	2508.5 - 2677.5	0.354	25.48	23M0G7D
		QPSK	2508.5 - 2677.5	0.338	25.28	23M3G7D
		16QAM	2508.5 - 2677.5	0.257	24.10	23M3W7D
	20 MHz	TT/2 BPSK	2506.0 - 2680.0	0.335	25.24	18M0G7D
		QPSK	2506.0 - 2680.0	0.322	25.08	18M3G7D
		16QAM	2506.0 - 2680.0	0.253	24.03	18M3W7D
	15 MHz	TT/2 BPSK	2503.5 - 2682.5	0.338	25.28	13M0G7D
		QPSK	2503.5 - 2682.5	0.321	25.06	13M7G7D
		16QAM	2503.5 - 2682.5	0.249	23.96	13M7W7D
	10 MHz	TT/2 BPSK	2501.0 - 2685.0	0.343	25.35	8M66G7D
		QPSK	2501.0 - 2685.0	0.319	25.03	8M65G7D
		16QAM	2501.0 - 2685.0	0.253	24.02	8M71W7D

Overview Table NR Band n41 – Tx Hopping

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 6 of 145

Antenna-2						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
ULCA LTE Band 41(PC3)	40 MHz	QPSK	2506.0 - 2680.0	0.171	22.34	37M9G7D
		16QAM	2506.0 - 2680.0	0.088	19.42	37M7W7D
LTE Band 41(PC3)	20 MHz	QPSK	2506.0 - 2680.0	0.193	22.86	18M0G7D
		16QAM	2506.0 - 2680.0	0.160	22.05	18M0W7D
	15 MHz	QPSK	2503.5 - 2682.5	0.186	22.68	13M6G7D
		16QAM	2503.5 - 2682.5	0.159	22.02	13M5W7D
	10 MHz	QPSK	2501.0 - 2685.0	0.190	22.79	9M02G7D
		16QAM	2501.0 - 2685.0	0.158	21.98	9M06W7D
	5 MHz	QPSK	2498.5 - 2687.5	0.192	22.83	4M51G7D
		16QAM	2498.5 - 2687.5	0.162	22.08	4M54W7D

Overview Table LTE Band Ant 2

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT		Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.				Page 7 of 145

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

Measurements were conducted at the Element laboratory(ies) indicated in Section 1.3 below. All measurement facilities are compliant with the test site requirements specified in ANSI C63.4:2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A. (“MD”)

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- Element Washington DC LLC facility is a registered test laboratory with the site description on file with ISSED (Wireless Test Lab number 2451B) and FCC (Designation Number US1113).
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISSED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

Measurements were performed at Element Materials Technology Suwon, Ltd. located in Yongin-si, Gyeonggi-do, 16954, South Korea. (“ES”)

- Element Materials Technology Suwon, Ltd. is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation(A2LA) with Certificate number 2041.04 for Specific Absorption Rate (SAR), and Electromagnetic Compatibility (EMC) & Telecommunications testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology Suwon, Ltd. facility is accredited, designated, and recognized in accordance with the provision of Radio Wave Act and International Standard ISO/IEC 17025:2017 under the National Radio Research Agency.
 - Designation Number / CABID: KR0169
 - Test Firm Registration Number of FCC: 417945
 - Test Firm Registration Number of ISSED: 26168

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 8 of 145

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMF776JPN**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27.

The authorization for this device utilize data referencing from FCC ID: A3LSMF776U as permitted per KDB 484596 D01 v03. Although data is referenced from the SM-F776U, additional test data is provided herein, as applicable, for the additional ULCA LTE Band 41 which is supported by this model. Data referencing data test results are included in Appendix A of this report.

Test Device Serial No.: 0139M, 0130M, 0128M, 0358M, 0359M, 0775M, 0671M, 0794M, 0791M, 0347M, 0349M, 0339M, 0354M, 0351M, 0986M, 0985M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1), 802.11b/g/n/ac/ax/be WLAN, 802.11a/n/ac/ax/be UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer, SCS

This device supports Tx Device Hopping (ANT Switching) for the multiple 5G NR Bands and can operate on two distinct paths. The paths are labeled as either Main or Switching paths. Testing was done on both paths and is included in this report.

Band	Ant1	Ant2
LTE Band 41 PC3	Ant B	Ant H

Table 2-1. Antenna Report Naming Convention

Band	Ant1
NR Band n41 – Default	Ant B
NR Band n41 – Tx Hopping	Ant H

Table 2-2. Antenna Report Naming Convention

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26:2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports three folder configurations: one is with folder fully open, one is where the folder is half open (90 degrees), and one is with folder closed. All configurations are tested, and the worst case radiated emissions data is shown in this report.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 9 of 145



authorized wireless charging pad (WCP) Model: EP-2400 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 Duty Cycle Information

For all 5G NR and LTE operations in FDD mode, the EUT duty cycle was set to 100%.

For LTE TDD operation, a call box was used to force maximum transmission for each band. For LTE TDD bands, the maximum duty cycle is 63.3% for PC3 and 43.3% for PC2.

For 5G NR TDD operations, the EUT was set to transmit either via a Factory Test Mode (FTM) software provided by the manufacturer or in an online mode. The EUT duty cycle was set to 100% in all cases during FTM operation. During online operation the EUT duty cycle was set to an operational max using a callbox, where the max duty cycle was determined to be 20.0%. Gated and triggered measurement settings were used in this case.

2.5 Software and Firmware

Testing was performed on device(s) using software/firmware version F776USQU0AZC9 installed on the EUT.

2.6 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 10 of 145

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26:2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4:2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26:2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26:2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4:2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26:2015.

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 11 of 145

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

Table 4-1. Measurement Uncertainty Budget – MD

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.95
Radiated Disturbance (<1GHz)	4.10
Radiated Disturbance (>1GHz)	4.82
Radiated Disturbance (>18GHz)	4.96

Table 4-2. Measurement Uncertainty Budget – ES

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 12 of 145

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP1-002	EMC Cable and Switch System	2/3/2026	Annual	2/3/2027	AP1-002
-	ETS-001	EMC Cable and Switch System	1/29/2026	Annual	1/29/2027	ETS-001
-	ETS-002	EMC Cable and Switch System	1/29/2026	Annual	1/29/2027	ETS-002
-	MVG-001	EMC Cable and Switch System	2/2/2026	Annual	2/2/2027	MVG-001
-	MVG-002	EMC Cable and Switch System	2/2/2026	Annual	2/2/2027	MVG-002
-	LTx1	Licensed Transmitter Cable Set	1/30/2026	Annual	1/30/2027	LTx1
-	LTx2	Licensed Transmitter Cable Set	1/30/2026	Annual	1/30/2027	LTx2
-	LTx6-40	Licensed Transmitter Cable Set	1/30/2026	Annual	1/30/2027	LTx6-40
Anritsu	MA24408A	POWER SENSOR	1/27/2026	Annual	1/27/2027	11676
Anritsu	MT8000A	Radio Communication Test Station	6/4/2025	Annual	6/4/2026	6261914237
Anritsu	MT8000A	Radio Communication Test Station	10/17/2025	Annual	10/17/2026	6272337405
Anritsu	MT8821C	Radio Communication Analyze	9/15/2025	Annual	9/15/2026	6201381794
Anritsu	MT8821C	Radio Communication Analyze	3/11/2026	Annual	3/11/2027	6262044715
EMCO	3115	Horn Antenna (1-18GHz)	9/6/2024	Biennial	9/6/2026	9704-5182
Espec	ESX-2CA	Environmental Chamber	11/20/2024	Biennial	11/20/2026	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	6/4/2025	Biennial	6/4/2027	125518
ETS-Lindgren	3116C	DRG Horn Antenna	4/22/2025	Biennial	4/22/2027	218893
Keysight Technologies	N9020A	MXA Signal Analyzer (NM)	6/4/2025	Annual	6/4/2026	MY54500644
Keysight Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	9/15/2025	Annual	9/15/2026	MY49430494
Keysight Technologies	N9020A	MXA Signal Analyzer	5/7/2025	Annual	5/7/2026	US46470561
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	6/6/2025	Annual	6/6/2026	MY52350166
Keysight Technologies	N9030A	PXA Signal Analyzer	6/16/2025	Annual	6/16/2026	MY55410501
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	1/16/2026	Annual	1/16/2027	100348
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	3/11/2026	Annual	3/11/2027	101716
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	6/18/2025	Annual	6/18/2026	140148
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	9/11/2024	Biennial	9/11/2026	A051107
Sunol	JB6	Bi-Log Antenna (30M - 5GHz)	3/24/2025	Biennial	3/24/2027	A082816

Table 5-1. Test Equipment Calibration Table – MD

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9030A	PXA Signal Analyzer	05/23/2025	Annual	05/22/2026	MY49432391
Rohde & Schwarz	CMW500	Radio Communication Tester	10/24/2025	Annual	10/23/2026	171075
-	KLTX1	Licensed Transmitter Cable Set	07/17/2025	Annual	07/16/2026	KLTX1
-	KLTX2	Licensed Transmitter Cable Set	07/17/2025	Annual	07/16/2026	KLTX2

Table 5-2. Test Equipment Calibration Table – ES

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 13 of 145

Component	Serial Number
Sucoflex 106A Cable	501992
MegaPhase Cable N29-N1N1-324	20335606 001
Rohde & Schwarz SF Unit	102133
MiniCircuits Cable CBL-2FT-SMSM+	77745
MegaPhase Cable 10511-1	15034701 001
MiniCircuits Switch RC 2SPDT-A18	11703270 041
Sucoflex 104 Cable	320259/4
Sucoflex 104 Cable	321999/4
Sucoflex 104 Cable	321995/4

Table 5-3. AP1 EMC Cable and Switch System Components

Component	Serial Number
Pasternack Cable RG214/U	111815
MegaPhase (CAGE 1GVT4) Cable GR18-N5N5-24	14042714 001

Table 5-4. ETS-001 EMC Cable and Switch System Components

Component	Serial Number
MegaPhase (CAGE 1GVT4) Cable GR18-N5N5-24	14042714 001
MegaPhase (CAGE 1GVT4) Cable NC29-N1N1-324	20502201 001
Rohde & Schwarz SF Unit	102134
Minicircuits Cable CBL=0.5M-NMNM+	15440

Table 5-5. ETS-002 EMC Cable and Switch System Components

Component	Serial Number
MegaPhase (CAGE 1GVT4) Cable NC29-N1N1-324	20379901 001
Sucoflex Cable 126E	S/N:551792
Rohde & Schwarz SF Unit	102155
SMU/RF-A OUT cable	1127118600 10 06 379

Table 5-6. MVG-001 EMC Cable and Switch System Components

Component	Serial Number
MiniCircuits Cable CBL-0.5M-SMNM+	47261
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-001
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-002
MegaPhase (CAGE 1GVT4) Cable NC29-N1N1-324	19046401 001
Megaphase (CAGE 1GVT4) Flex Cable 10511-1	15044701-006
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-002
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-004
Micro-Coax Utilflex Cable UFB142A-0-0629-5GU200 MFR 64639	232069-001
Rohde & Schwarz SF Unit	102138
Rohde & Schwarz OSP130 Open Switch and Control Unit	101181
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-003
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-003
Rohde & Schwarz TS-PR8 Pre-Amplifier	102335

Table 5-7. MVG-002 EMC Cable and Switch System Components

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 14 of 145

Component	Serial Number
MegaPhase (CAGE 1GVT4) Cable TM40-K1K1-30	20233002 004
Uniflex Micro Coax UFB 142A-Q-0984-200200	64639 232063 001
R&S TS-PR1840	9037.7670.02

Table 5-8. MD 1M 18-40 EMC Cable and Switch System Components

Component	Serial Number
Keysight Directional Coupler, Model: 87300C	55300398
Mini Circuits 6dB Attenuator, BW S6 2W263+	2105
MegaPhase Cable, Model: TM26-S1S1-30	20233001 004

Table 5-9. LTx1 Licensed Transmitter Cable Set

Component	Serial Number
Keysight Directional Coupler, Model: 87300C	55300391
Mini Circuits 6dB Attenuator, Model: BW S6 2W263+	1845
MegaPhase Cable, Model: TM26-S1S1-30	20233001 006

Table 5-10. LTx2 Licensed Transmitter Cable Set

Component	Serial Number
Fairview Microwave Directional Coupler, FM2CP1122-10	2122
MCL 6dB Attenuator, Model: BW-K6 2W44+	2013
MegaPhase Cable, Model: TM40-K1K1-30	20233002 003

Table 5-11. LTx6-40 Licensed Transmitter Cable Set

Component	Serial Number
2.92mm Directional Coupler, Model: FM2CP1122-10	1946
10 dB Attenuator, Model: MA-18G10-5W-NMF	ESR10-1
Cable	CL-RF-40G-01

Table 5-12. KLTx1 Licensed Transmitter Cable Set Components

Component	Serial Number
Directional Coupler, Model: UDC	TEMPNO.09-898
10 dB Attenuator, Model: MA-18G10-5W-NMF	ESR10-2
Cable	CL-RF-40G-02

Table 5-13. KLTx1 Licensed Transmitter Cable Set Components

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 15 of 145

6.0 SAMPLE EMISSION DESIGNATORS

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 16 of 145

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMF776JPN
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE/NR/ULCA

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference	Data Reference	Test Lab Location
CONDUCTED	Transmitter Conducted Output Power*	2.1046(a), 2.1046(c)	N/A	PASS	Section 7.2	Yes	MD & ES
	Occupied Bandwidth	2.1049(h)	N/A	PASS	Section 7.3	Yes	MD
	Conducted Band Edge / Spurious Emissions (LTE Band 41; NR Band n41)	2.1051, 27.53(m)(4)	Undesirable emissions must meet the limits detailed in 27.53(m)(4)	PASS	Sections 7.4, 7.5	Yes	MD & ES
	Frequency Stability	2.1055, 27.54	Fundamental emissions stay within authorized frequency block	PASS	Section 7.8	Yes	MD
RADIATED	Equivalent Isotropic Radiated Power (LTE Band 41; NR Band n41)	27.50(h)(2)	≤ 2 Watts max. EIRP	PASS	Section 7.6	Yes	MD
	Radiated Spurious Emissions (LTE Band 41; NR Band n41)	2.1053, 27.53(m)	Undesirable emissions must meet the limits detailed in 27.53(m)	PASS	Section 7.7	Yes	MD

* The only transmitter output conducted powers included in this report are those where the Pmax value, per the tune-up document, is higher than any of the DSI power levels. For the remaining conducted power measurements, see the **RF Exposure Report**.

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v2.3.0.
- 5) Data was referenced from model SM-F776U for the certification of SC-55G. See Section 9.0 for spot-check results.

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 17 of 145

7.2 Conducted Output Power Data

Test Overview

All online mode emissions are measured with a call box connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. For modes operating with FTM the emissions were measured using a power meter connected directly to the antenna terminal of the EUT. All modes of operation were investigated, and the worst-case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26:2015 – Section 5.2

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup – Online Mode




Figure 7-2. Test Instrument & Measurement Setup – FTM Mode

Test Notes

1. Conducted power measurements were evaluated using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.
2. All other conducted power measurements are contained in the RF exposure report for this filing.
3. Conducted power was found to reduce for the higher order QAM modulations when compared to 16QAM. Due to this trend, only the worst-case QAM (16QAM) powers are included in this section.

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 18 of 145

Power State	Band	Bandwidth (PCC + SCC)	PCC					SCC					ULCATx. Power [dBm]
			Modulation	UL Channel	UL Frequency	UL # RB	UL RB Offset	Modulation	UL Channel	UL Frequency	UL # RB	UL RB Offset	
Max	LTE B41 (PC3)	20MHz + 20MHz	QPSK	39750	2506.0	1	99	QPSK	39948	2525.8	1	0	23.67
				40620	2593.0	1	99		40818	2612.8	1	0	23.6
				41490	2680.0	1	0		41292	2660.2	1	99	23.49
			QPSK	39750	2506	100	0	QPSK	39948	2525.8	100	0	22.02
			16-QAM	39750	2506	100	0	16-QAM	39948	2525.8	100	0	21.06

Table 7-2. Conducted Power Results –LTE ULCA Band 41 – Ant1

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	39750	2506.0	1 / 50	24.45
		40620	2593.0	1 / 50	24.13
		41490	2680.0	1 / 50	24.64
	16-QAM	39750	2506.0	1 / 50	23.82
		40620	2593.0	1 / 0	23.52
		41490	2680.0	1 / 50	23.74
15 MHz	QPSK	39725	2503.5	1 / 37	24.56
		40620	2593.0	1 / 37	24.11
		41515	2682.5	1 / 0	24.09
	16-QAM	39725	2503.5	1 / 74	23.85
		40620	2593.0	1 / 0	23.52
		41515	2682.5	1 / 0	23.71
10 MHz	QPSK	39700	2501.0	1 / 0	24.49
		40620	2593.0	1 / 0	24.23
		41540	2685.0	1 / 25	24.66
	16-QAM	39700	2501.0	1 / 49	23.73
		40620	2593.0	1 / 0	23.41
		41540	2685.0	1 / 25	23.74
5 MHz	QPSK	39675	2498.5	1 / 12	24.58
		40620	2593.0	1 / 0	24.09
		41565	2687.5	1 / 12	24.45
	16-QAM	39675	2498.5	1 / 0	23.82
		40620	2593.0	1 / 0	23.53
		41565	2687.5	1 / 0	23.90

Table 7-3. Conducted Power Results – LTE Band 41 – Ant1

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 19 of 145

Power State	Band	Bandwidth (PCC + SCC)	PCC					SCC					ULCATx. Power [dBm]
			Modulation	UL Channel	UL Frequency	UL # RB	UL RB Offset	Modulation	UL Channel	UL Frequency	UL # RB	UL RB Offset	
Max	LTE B41 (PC3)	20MHz + 20MHz	QPSK	39750	2506.0	1	99	QPSK	39948	2525.8	1	0	25.56
				40620	2593.0	1	99		40818	2612.8	1	0	25.43
				41490	2680.0	1	0		41292	2660.2	1	99	25.51
			QPSK	39750	2506	100	0	QPSK	39948	2525.8	100	0	23.76
			16-QAM	39750	2506	100	0	16-QAM	39948	2525.8	100	0	22.98

Table 7-4. Conducted Power Results –LTE ULCA Band 41 – Ant2

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	39750	2506.0	1 / 50	25.31
		40620	2593.0	1 / 50	25.29
		41490	2680.0	1 / 0	25.14
	16-QAM	39750	2506.0	1 / 50	24.57
		40620	2593.0	1 / 50	24.55
		41490	2680.0	1 / 50	24.43
15 MHz	QPSK	39725	2503.5	1 / 37	25.42
		40620	2593.0	1 / 0	25.11
		41515	2682.5	1 / 0	24.58
	16-QAM	39725	2503.5	1 / 37	24.66
		40620	2593.0	1 / 0	24.52
		41515	2682.5	1 / 37	24.35
10 MHz	QPSK	39700	2501.0	1 / 0	25.42
		40620	2593.0	1 / 0	25.22
		41540	2685.0	1 / 0	25.10
	16-QAM	39700	2501.0	1 / 25	24.59
		40620	2593.0	1 / 0	24.48
		41540	2685.0	1 / 0	24.34
5 MHz	QPSK	39675	2498.5	1 / 24	25.38
		40620	2593.0	1 / 12	25.26
		41565	2687.5	1 / 0	25.08
	16-QAM	39675	2498.5	1 / 12	24.75
		40620	2593.0	1 / 24	24.58
		41565	2687.5	1 / 0	24.43

Table 7-5. Conducted Power Results – LTE Band 41 – Ant2

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT		Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.				Page 20 of 145

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	$\pi/2$ BPSK	509202	2546.01	1 / 1	26.76
		518598	2592.99	1 / 271	26.72
		528000	2640.00	1 / 1	26.62
	QPSK	509202	2546.01	1 / 1	26.71
		518598	2592.99	1 / 271	26.73
		528000	2640.00	1 / 1	26.65
	16-QAM	509202	2546.01	1 / 1	25.67
		518598	2592.99	1 / 271	25.71
		528000	2640.00	1 / 1	25.61
90 MHz	$\pi/2$ BPSK	508200	2541.00	1 / 1	26.75
		518598	2592.99	1 / 243	26.69
		528996	2644.98	1 / 243	26.78
	QPSK	508200	2541.00	1 / 1	26.78
		518598	2592.99	1 / 243	26.69
		528996	2644.98	1 / 122	26.73
	16-QAM	508200	2541.00	1 / 1	25.52
		518598	2592.99	1 / 243	25.54
		528996	2644.98	1 / 122	25.61
80 MHz	$\pi/2$ BPSK	507204	2536.02	1 / 1	26.68
		518598	2592.99	1 / 215	26.69
		529998	2649.99	1 / 215	26.75
	QPSK	507204	2536.02	1 / 1	26.59
		518598	2592.99	1 / 215	26.58
		529998	2649.99	1 / 215	26.70
	16-QAM	507204	2536.02	1 / 1	25.55
		518598	2592.99	1 / 215	25.50
		529998	2649.99	1 / 215	25.63
70 MHz	$\pi/2$ BPSK	506202	2531.01	1 / 1	26.66
		518598	2592.99	1 / 187	26.68
		531000	2655.00	1 / 187	26.69
	QPSK	506202	2531.01	1 / 1	26.58
		518598	2592.99	1 / 187	26.65
		531000	2655.00	1 / 187	26.63
	16-QAM	506202	2531.01	1 / 1	25.54
		518598	2592.99	1 / 94	25.39
		531000	2655.00	1 / 187	25.44
60 MHz	$\pi/2$ BPSK	505200	2526.00	1 / 1	26.47
		518598	2592.99	1 / 160	26.55
		531996	2659.98	1 / 160	26.61
	QPSK	505200	2526.00	1 / 1	26.39
		518598	2592.99	1 / 160	26.46
		531996	2659.98	1 / 160	26.48
	16-QAM	505200	2526.00	1 / 1	25.32
		518598	2592.99	1 / 160	25.31
		531996	2659.98	1 / 160	25.39
50 MHz	$\pi/2$ BPSK	504204	2521.02	1 / 1	26.74
		518598	2592.99	1 / 131	26.80
		532998	2664.99	1 / 66	26.81
	QPSK	504204	2521.02	1 / 1	26.67
		518598	2592.99	1 / 131	26.69
		532998	2664.99	1 / 66	26.67
	16-QAM	504204	2521.02	1 / 1	25.49
		518598	2592.99	1 / 131	25.58
		532998	2664.99	1 / 66	25.59
45 MHz	$\pi/2$ BPSK	503703	2518.50	1 / 1	26.65
		518598	2592.99	1 / 117	26.76
		533449	2667.50	1 / 59	26.66
	QPSK	503703	2518.50	1 / 1	26.61
		518598	2592.99	1 / 117	26.64
		533449	2667.50	1 / 59	26.58
	16-QAM	503703	2518.50	1 / 1	25.65
		518598	2592.99	1 / 117	25.61
		533449	2667.50	1 / 1	25.50

Table 7-6. Conducted Power Results – NR Band n41 PC2 – Default – Ant1

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 21 of 145

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	$\pi/2$ BPSK	503202	2516.01	1 / 1	26.50
		518598	2592.99	1 / 104	26.58
		534000	2670.00	1 / 104	26.71
	QPSK	503202	2516.01	1 / 1	26.40
		518598	2592.99	1 / 53	26.47
		534000	2670.00	1 / 53	26.63
	16-QAM	503202	2516.01	1 / 1	25.36
		518598	2592.99	1 / 104	25.45
		534000	2670.00	1 / 53	25.51
35 MHz	$\pi/2$ BPSK	502701	2513.50	1 / 46	26.62
		518598	2592.99	1 / 46	26.66
		534448	2672.50	1 / 46	26.81
	QPSK	502701	2513.50	1 / 1	26.58
		518598	2592.99	1 / 46	26.53
		534448	2672.50	1 / 90	26.74
	16-QAM	502701	2513.50	1 / 1	25.42
		518598	2592.99	1 / 90	25.47
		534448	2672.50	1 / 90	25.56
30 MHz	$\pi/2$ BPSK	502200	2511.00	1 / 1	26.74
		518598	2592.99	1 / 76	26.65
		534996	2674.98	1 / 76	26.68
	QPSK	502200	2511.00	1 / 1	26.66
		518598	2592.99	1 / 76	26.62
		534996	2674.98	1 / 76	26.58
	16-QAM	502200	2511.00	1 / 1	25.43
		518598	2592.99	1 / 1	25.36
		534996	2674.98	1 / 1	25.50
25 MHz	$\pi/2$ BPSK	501702	2508.50	1 / 1	26.60
		518598	2592.99	1 / 32	26.67
		535497	2677.50	1 / 32	26.74
	QPSK	501702	2508.50	1 / 32	26.53
		518598	2592.99	1 / 1	26.52
		535497	2677.50	1 / 32	26.64
	16-QAM	501702	2508.50	1 / 1	25.39
		518598	2592.99	1 / 1	25.36
		535497	2677.50	1 / 32	25.41
20 MHz	$\pi/2$ BPSK	501204	2506.02	1 / 25	26.56
		518598	2592.99	1 / 25	26.64
		535998	2679.99	1 / 25	26.74
	QPSK	501204	2506.02	1 / 25	26.44
		518598	2592.99	1 / 25	26.53
		535998	2679.99	1 / 25	26.64
	16-QAM	501204	2506.02	1 / 25	25.31
		518598	2592.99	1 / 25	25.43
		535998	2679.99	1 / 25	25.60
15 MHz	$\pi/2$ BPSK	500706	2503.50	1 / 19	26.66
		518598	2592.99	1 / 36	26.66
		536449	2682.50	1 / 36	26.78
	QPSK	500706	2503.50	1 / 19	26.63
		518598	2592.99	1 / 36	26.56
		536449	2682.50	1 / 36	26.69
	16-QAM	500706	2503.50	1 / 19	25.52
		518598	2592.99	1 / 36	25.48
		536449	2682.50	1 / 19	25.61
10 MHz	$\pi/2$ BPSK	500208	2501.00	1 / 22	26.53
		518598	2592.99	1 / 12	26.65
		537000	2685.00	1 / 1	26.69
	QPSK	500208	2501.00	1 / 22	26.40
		518598	2592.99	1 / 22	26.55
		537000	2685.00	1 / 1	26.58
	16-QAM	500208	2501.00	1 / 22	25.27
		518598	2592.99	1 / 22	25.48
		537000	2685.00	1 / 1	25.47

Table 7-7. Conducted Power Results – NR Band n41 PC2 – Default – Ant1

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 22 of 145

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	$\pi/2$ BPSK	509202	2546.01	1 / 271	27.22
		518598	2592.99	1 / 1	27.52
		528000	2640.00	1 / 1	27.53
	QPSK	509202	2546.01	1 / 1	27.45
		518598	2592.99	1 / 1	27.53
		528000	2640.00	1 / 1	27.51
	16-QAM	509202	2546.01	1 / 1	26.31
		518598	2592.99	1 / 1	26.38
		528000	2640.00	1 / 1	26.45
90 MHz	$\pi/2$ BPSK	508200	2541.00	1 / 1	27.33
		518598	2592.99	1 / 122	27.59
		528996	2644.98	1 / 1	27.61
	QPSK	508200	2541.00	1 / 1	27.32
		518598	2592.99	1 / 122	27.52
		528996	2644.98	1 / 1	27.56
	16-QAM	508200	2541.00	1 / 1	26.25
		518598	2592.99	1 / 1	26.40
		528996	2644.98	1 / 1	26.41
80 MHz	$\pi/2$ BPSK	507204	2536.02	1 / 1	27.26
		518598	2592.99	1 / 1	27.50
		529998	2649.99	1 / 1	27.44
	QPSK	507204	2536.02	1 / 1	27.15
		518598	2592.99	1 / 1	27.45
		529998	2649.99	1 / 1	27.34
	16-QAM	507204	2536.02	1 / 215	26.02
		518598	2592.99	1 / 108	26.27
		529998	2649.99	1 / 1	26.23
70 MHz	$\pi/2$ BPSK	506202	2531.01	1 / 1	27.16
		518598	2592.99	1 / 94	27.53
		531000	2655.00	1 / 1	27.25
	QPSK	506202	2531.01	1 / 1	27.15
		518598	2592.99	1 / 94	27.41
		531000	2655.00	1 / 1	27.17
	16-QAM	506202	2531.01	1 / 1	26.05
		518598	2592.99	1 / 187	26.27
		531000	2655.00	1 / 1	26.06
60 MHz	$\pi/2$ BPSK	505200	2526.00	1 / 1	27.02
		518598	2592.99	1 / 160	27.37
		531996	2659.98	1 / 1	27.22
	QPSK	505200	2526.00	1 / 1	26.88
		518598	2592.99	1 / 160	27.35
		531996	2659.98	1 / 1	27.16
	16-QAM	505200	2526.00	1 / 1	25.75
		518598	2592.99	1 / 81	26.26
		531996	2659.98	1 / 1	25.99
50 MHz	$\pi/2$ BPSK	504204	2521.02	1 / 1	27.33
		518598	2592.99	1 / 66	27.60
		532998	2664.99	1 / 131	27.40
	QPSK	504204	2521.02	1 / 1	27.27
		518598	2592.99	1 / 66	27.51
		532998	2664.99	1 / 131	27.36
	16-QAM	504204	2521.02	1 / 1	26.23
		518598	2592.99	1 / 131	26.49
		532998	2664.99	1 / 66	26.23
45 MHz	$\pi/2$ BPSK	503703	2518.50	1 / 1	27.32
		518598	2592.99	1 / 59	27.63
		533449	2667.50	1 / 117	27.36
	QPSK	503703	2518.50	1 / 1	27.32
		518598	2592.99	1 / 59	27.54
		533449	2667.50	1 / 117	27.34
	16-QAM	503703	2518.50	1 / 1	26.11
		518598	2592.99	1 / 117	26.41
		533449	2667.50	1 / 117	26.23

Table 7-8. Conducted Power Results – NR Band n41 PC2 – Tx Hopping – Ant1

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 23 of 145

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
40 MHz	$\pi/2$ BPSK	503202	2516.01	1 / 104	27.14
		518598	2592.99	1 / 53	27.49
		534000	2670.00	1 / 104	27.17
	QPSK	503202	2516.01	1 / 104	27.08
		518598	2592.99	1 / 53	27.41
		534000	2670.00	1 / 53	27.13
	16-QAM	503202	2516.01	1 / 53	25.88
		518598	2592.99	1 / 53	26.26
		534000	2670.00	1 / 53	26.02
35 MHz	$\pi/2$ BPSK	502701	2513.50	1 / 46	27.30
		518598	2592.99	1 / 46	27.65
		534448	2672.50	1 / 46	27.34
	QPSK	502701	2513.50	1 / 46	27.21
		518598	2592.99	1 / 46	27.56
		534448	2672.50	1 / 90	27.23
	16-QAM	502701	2513.50	1 / 90	25.97
		518598	2592.99	1 / 46	26.30
		534448	2672.50	1 / 90	26.05
30 MHz	$\pi/2$ BPSK	502200	2511.00	1 / 1	27.23
		518598	2592.99	1 / 76	27.60
		534996	2674.98	1 / 1	27.43
	QPSK	502200	2511.00	1 / 1	27.18
		518598	2592.99	1 / 76	27.55
		534996	2674.98	1 / 1	27.33
	16-QAM	502200	2511.00	1 / 1	26.03
		518598	2592.99	1 / 76	26.53
		534996	2674.98	1 / 39	26.14
25 MHz	$\pi/2$ BPSK	501702	2508.50	1 / 1	27.30
		518598	2592.99	1 / 32	27.69
		535497	2677.50	1 / 32	27.24
	QPSK	501702	2508.50	1 / 1	27.22
		518598	2592.99	1 / 32	27.59
		535497	2677.50	1 / 1	27.19
	16-QAM	501702	2508.50	1 / 1	26.08
		518598	2592.99	1 / 63	26.36
		535497	2677.50	1 / 1	25.96
20 MHz	$\pi/2$ BPSK	501204	2506.02	1 / 25	27.15
		518598	2592.99	1 / 25	27.45
		535998	2679.99	1 / 49	27.14
	QPSK	501204	2506.02	1 / 25	27.09
		518598	2592.99	1 / 25	27.39
		535998	2679.99	1 / 1	27.03
	16-QAM	501204	2506.02	1 / 25	25.81
		518598	2592.99	1 / 25	26.29
		535998	2679.99	1 / 25	25.97
15 MHz	$\pi/2$ BPSK	500706	2503.50	1 / 36	27.20
		518598	2592.99	1 / 36	27.49
		536449	2682.50	1 / 19	27.16
	QPSK	500706	2503.50	1 / 36	27.13
		518598	2592.99	1 / 36	27.37
		536449	2682.50	1 / 1	27.07
	16-QAM	500706	2503.50	1 / 36	25.98
		518598	2592.99	1 / 1	26.22
		536449	2682.50	1 / 1	25.93
10 MHz	$\pi/2$ BPSK	500208	2501.00	1 / 22	27.00
		518598	2592.99	1 / 22	27.56
		537000	2685.00	1 / 22	27.04
	QPSK	500208	2501.00	1 / 22	26.87
		518598	2592.99	1 / 12	27.34
		537000	2685.00	1 / 22	26.93
	16-QAM	500208	2501.00	1 / 22	25.74
		518598	2592.99	1 / 1	26.28
		537000	2685.00	1 / 1	25.80

Table 7-9. Conducted Power Results – NR Band n41 PC2 – Tx Hopping – Ant1

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 24 of 145

7.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26:2015 – Section 5.4.4

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

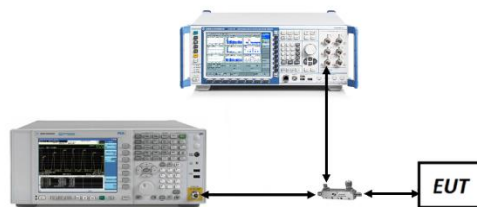


Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None.


FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 25 of 145

Mode	Bandwidth	Modulation	OBW [MHz]
ULCA LTE-B41PC3	20+20MHz	QPSK	37.89
		16QAM	37.76
LTE-B41PC3	20MHz	QPSK	18.04
		16QAM	18.00
	15MHz	QPSK	13.57
		16QAM	13.54
	10MHz	QPSK	9.04
		16QAM	9.01
	5MHz	QPSK	4.53
		16QAM	4.53

Table 7-10. Occupied Bandwidth Test Results – LTE – Ant 1

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 26 of 145

ULCA LTE Band 41(PC3) – Ant1

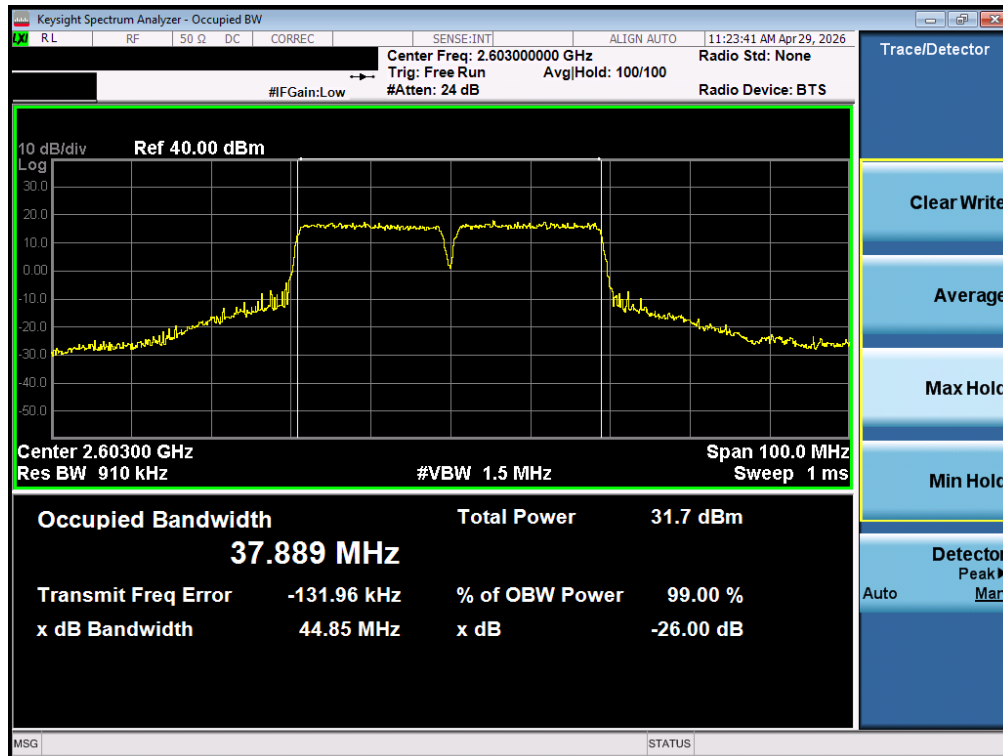



Plot 7-1. Occupied Bandwidth Plot (ULCA LTE Band 41(PC3) – 20+20MHz QPSK - Full RB - Ant1)





Plot 7-2. Occupied Bandwidth Plot (ULCA LTE Band 41(PC3) – 20+20MHz 16-QAM - Full RB - Ant1)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 27 of 145

LTE Band 41(PC3) – Ant1

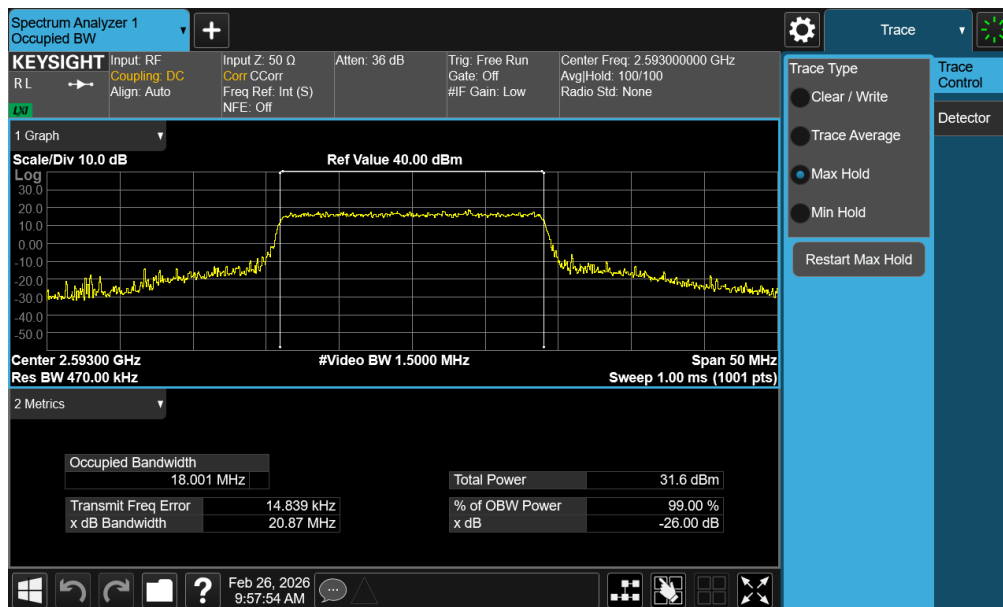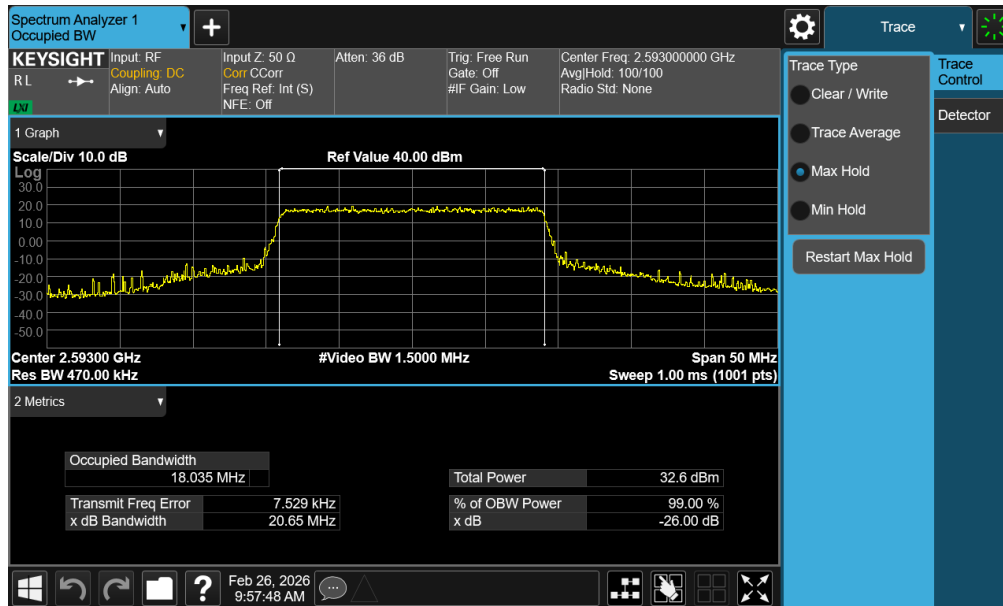


FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 28 of 145

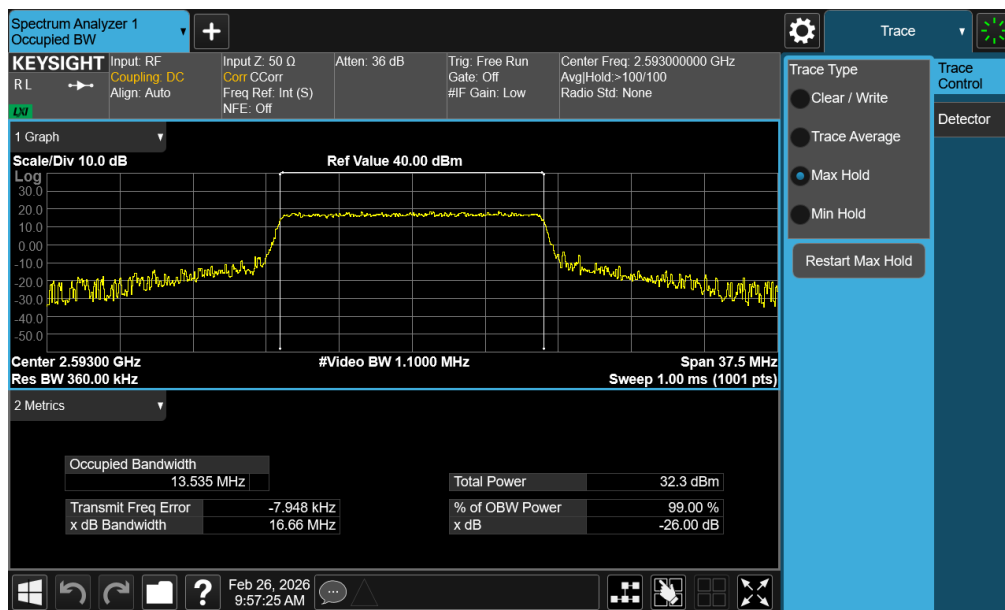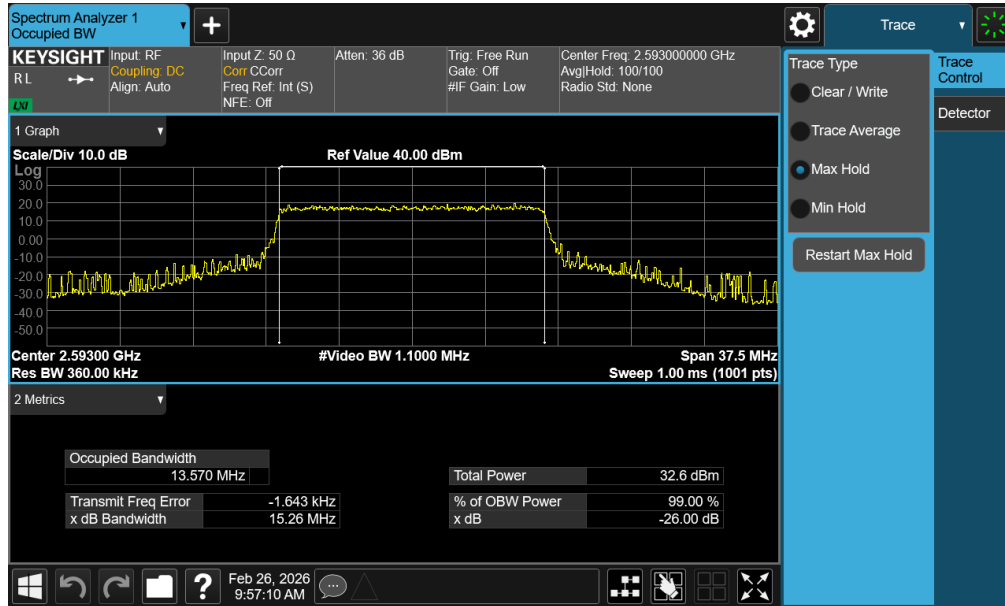


FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 29 of 145



© 2026 ELEMENT

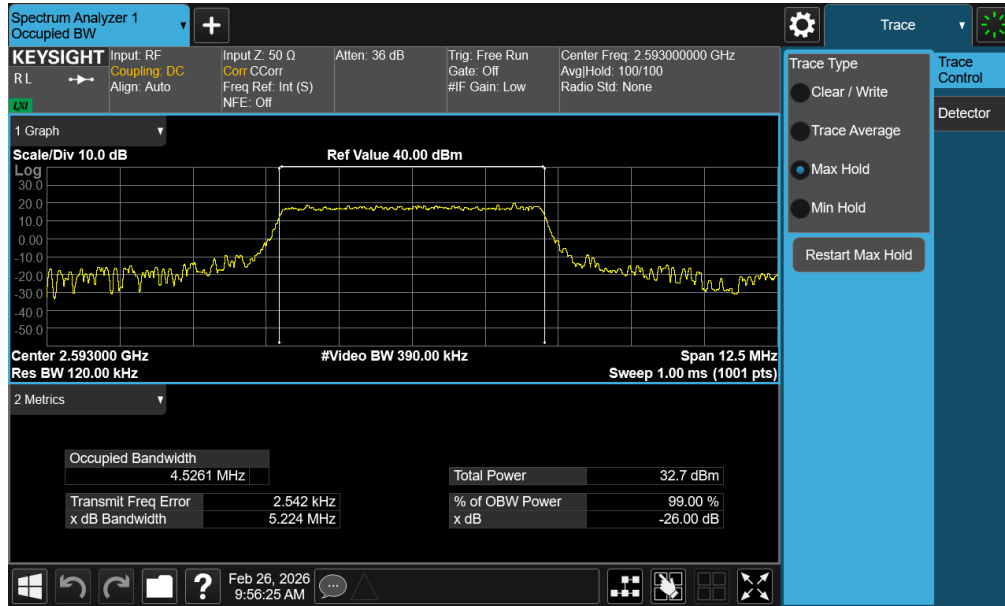

Plot 7-9. Occupied Bandwidth Plot (LTE Band 41(PC3) - 5MHz QPSK - Full RB - Ant1)

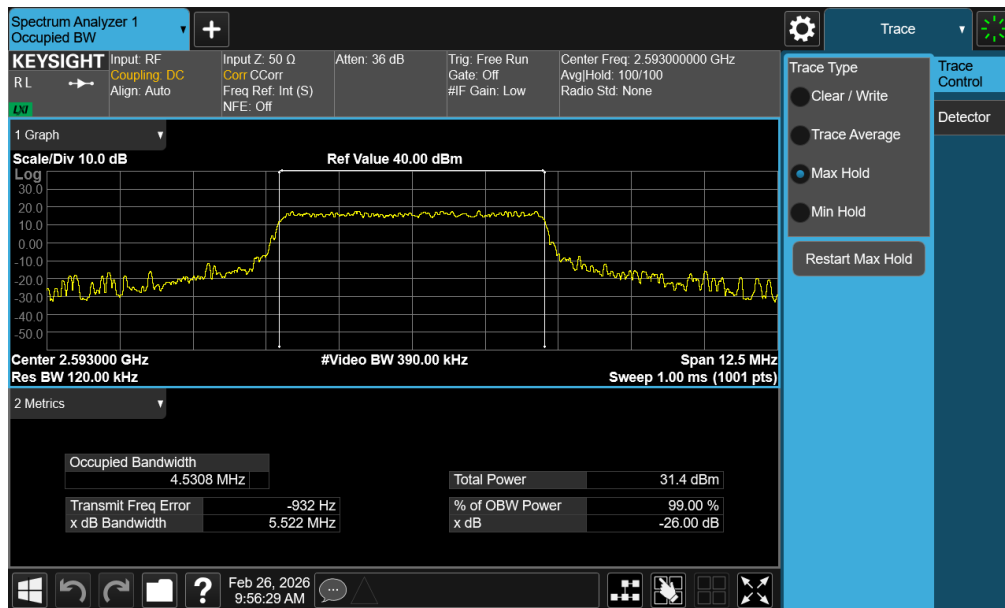

Plot 7-10. Occupied Bandwidth Plot (LTE Band 41(PC3) - 5MHz 16-QAM - Full RB - Ant1)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 31 of 145

Mode	Bandwidth	Modulation	OBW [MHz]
NR-n41PC2	100MHz	$\pi/2$ BPSK	96.70
		QPSK	97.73
		16QAM	97.75
	90MHz	$\pi/2$ BPSK	87.17
		QPSK	87.58
		16QAM	87.79
	80MHz	$\pi/2$ BPSK	77.21
		QPSK	77.78
		16QAM	77.62
	70MHz	$\pi/2$ BPSK	64.38
		QPSK	67.59
		16QAM	67.61
	60MHz	$\pi/2$ BPSK	58.06
		QPSK	58.13
		16QAM	57.96
	50MHz	$\pi/2$ BPSK	45.91
		QPSK	47.65
		16QAM	47.67
	45MHz	$\pi/2$ BPSK	38.69
		QPSK	42.66
		16QAM	42.72
	40MHz	$\pi/2$ BPSK	36.00
		QPSK	38.03
		16QAM	38.10
	35MHz	$\pi/2$ BPSK	32.25
		QPSK	32.88
		16QAM	32.92
	30MHz	$\pi/2$ BPSK	27.00
		QPSK	27.93
		16QAM	28.01
	25MHz	$\pi/2$ BPSK	23.00
		QPSK	23.27
		16QAM	23.29
	20MHz	$\pi/2$ BPSK	18.02
		QPSK	18.34
		16QAM	18.36
	15MHz	$\pi/2$ BPSK	13.00
		QPSK	13.70
		16QAM	13.65
	10MHz	$\pi/2$ BPSK	8.67
		QPSK	8.66
		16QAM	8.72

Table 7-11. Occupied Bandwidth Test Results – NR n41 Default – Ant 1


FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 32 of 145

Mode	Bandwidth	Modulation	OBW [MHz]
NR-n41PC2	100MHz	$\pi/2$ BPSK	96.95
		QPSK	97.74
		16QAM	97.72
	90MHz	$\pi/2$ BPSK	87.12
		QPSK	87.69
		16QAM	87.52
	80MHz	$\pi/2$ BPSK	77.25
		QPSK	77.65
		16QAM	77.46
	70MHz	$\pi/2$ BPSK	64.41
		QPSK	67.53
		16QAM	67.43
	60MHz	$\pi/2$ BPSK	57.96
		QPSK	58.04
		16QAM	57.92
	50MHz	$\pi/2$ BPSK	45.79
		QPSK	47.63
		16QAM	47.57
	45MHz	$\pi/2$ BPSK	38.68
		QPSK	42.54
		16QAM	42.63
	40MHz	$\pi/2$ BPSK	35.98
		QPSK	37.96
		16QAM	38.12
	35MHz	$\pi/2$ BPSK	32.23
		QPSK	32.85
		16QAM	32.92
	30MHz	$\pi/2$ BPSK	27.02
		QPSK	27.93
		16QAM	28.06
	25MHz	$\pi/2$ BPSK	22.99
		QPSK	23.29
		16QAM	23.27
	20MHz	$\pi/2$ BPSK	18.00
		QPSK	18.29
		16QAM	18.34
	15MHz	$\pi/2$ BPSK	12.99
		QPSK	13.69
		16QAM	13.66
	10MHz	$\pi/2$ BPSK	8.66
		QPSK	8.65
		16QAM	8.71


Table 7-12. Occupied Bandwidth Test Results – NR n41 Tx Hopping – Ant 1

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 33 of 145

NR Band n41 PC2 – Default – Ant1

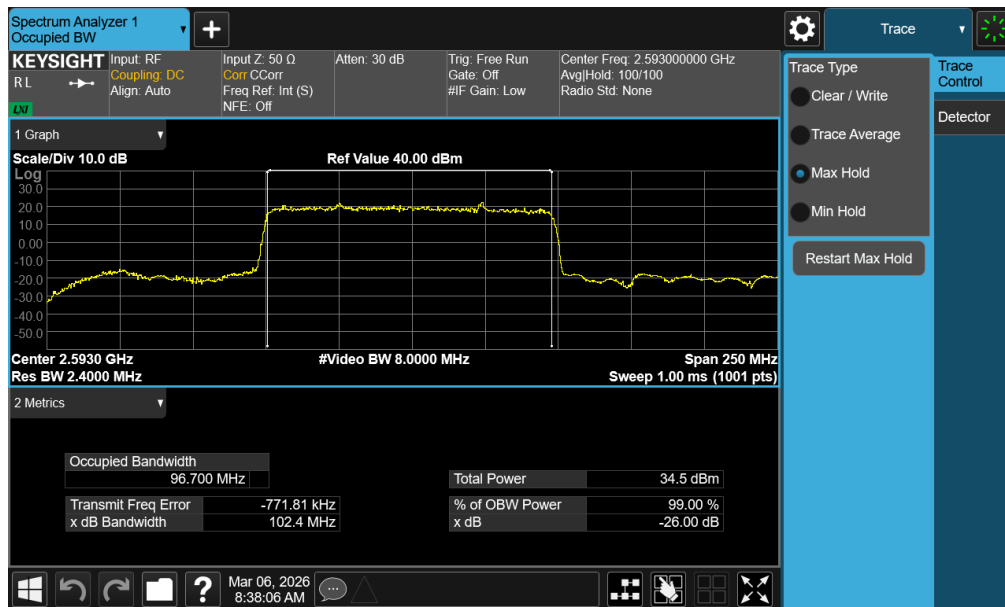


Plot 7-11. Occupied Bandwidth Plot (NR Band n41 PC2 – 100MHz $\pi/2$ BPSK – Full RB – Default – Ant1)

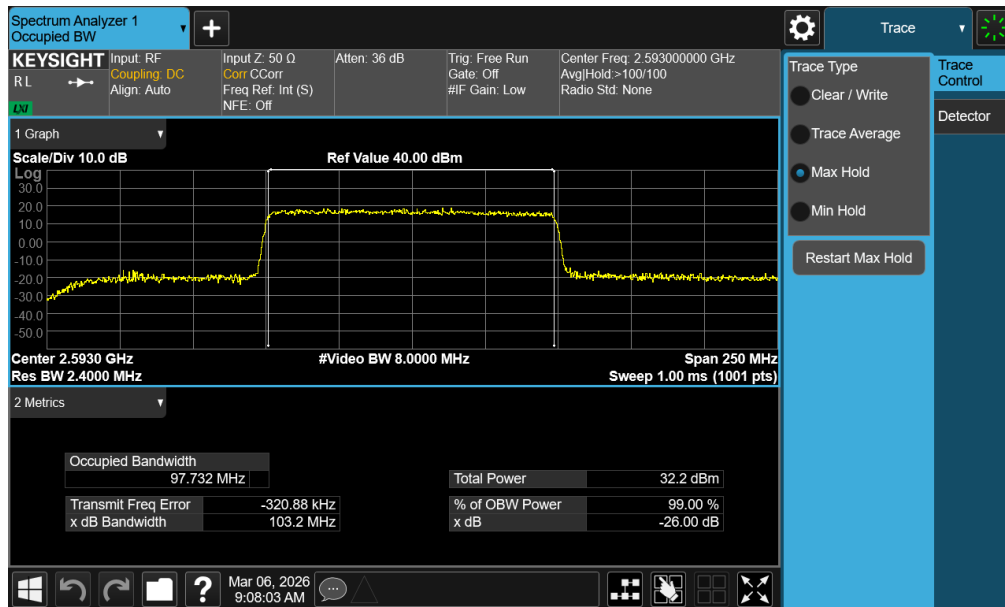


Plot 7-12. Occupied Bandwidth Plot (NR Band n41 PC2 – 100MHz QPSK – Full RB – Default – Ant1)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 34 of 145

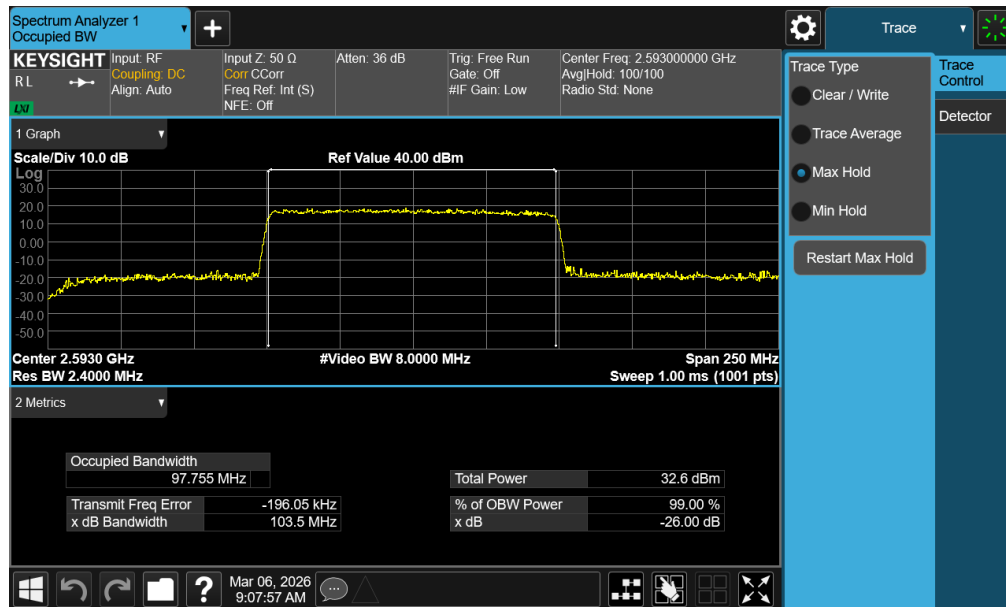


Plot 7-13. Occupied Bandwidth Plot (NR Band n41 PC2 – 100MHz 16-QAM – Full RB – Default – Ant1)

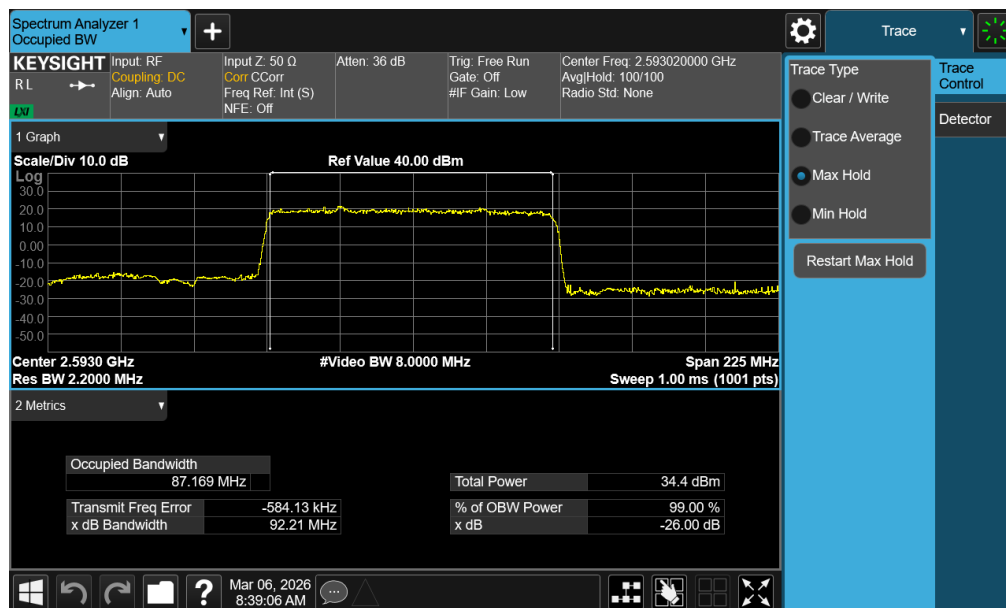


Plot 7-14. Occupied Bandwidth Plot (NR Band n41 PC2 – 90MHz $\pi/2$ BPSK – Full RB – Default – Ant1)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT		Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.				Page 35 of 145

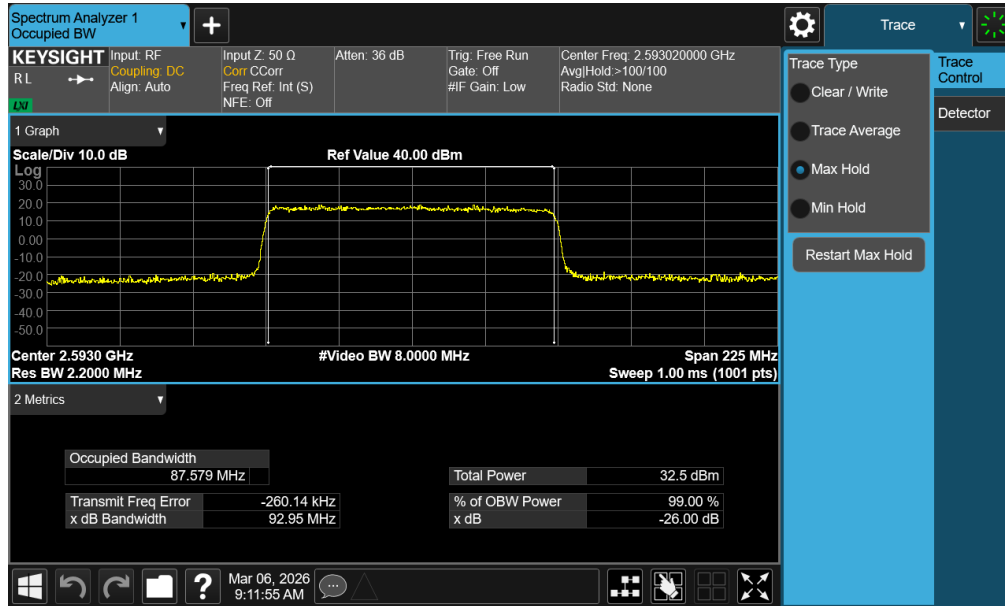


Plot 7-15. Occupied Bandwidth Plot (NR Band n41 PC2 – 90MHz QPSK – Full RB – Default – Ant1)

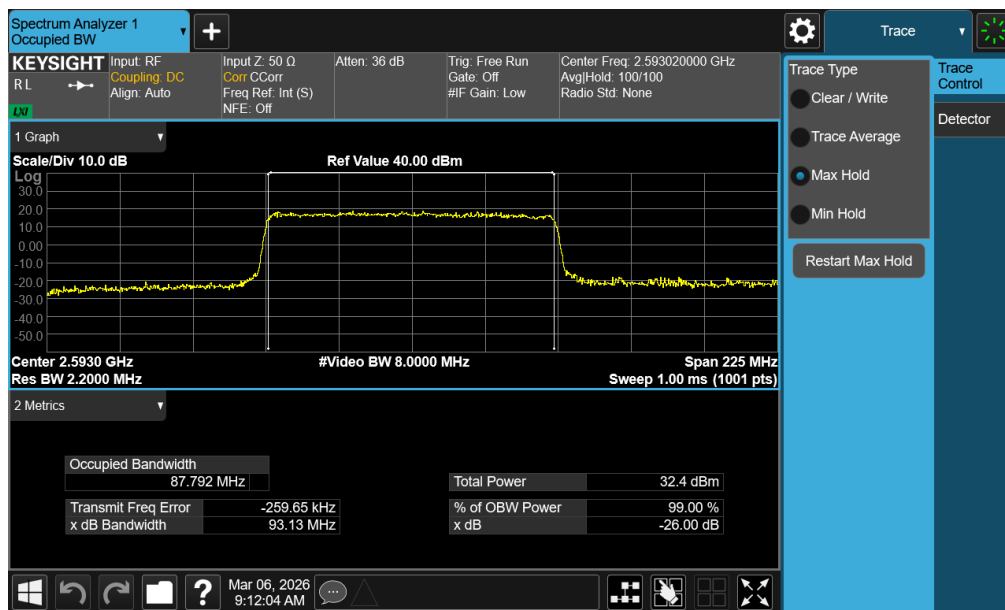


Plot 7-16. Occupied Bandwidth Plot (NR Band n41 PC2 – 90MHz 16-QAM – Full RB – Default – Ant1)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 36 of 145


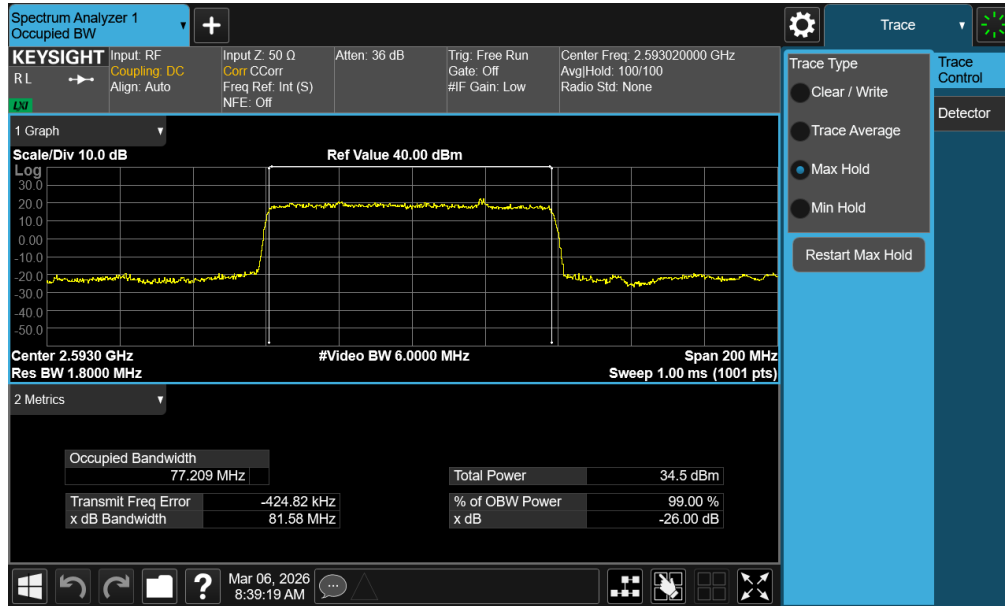


Plot 7-17. Occupied Bandwidth Plot (NR Band n41 PC2 – 80MHz $\pi/2$ BPSK – Full RB – Default – Ant1)

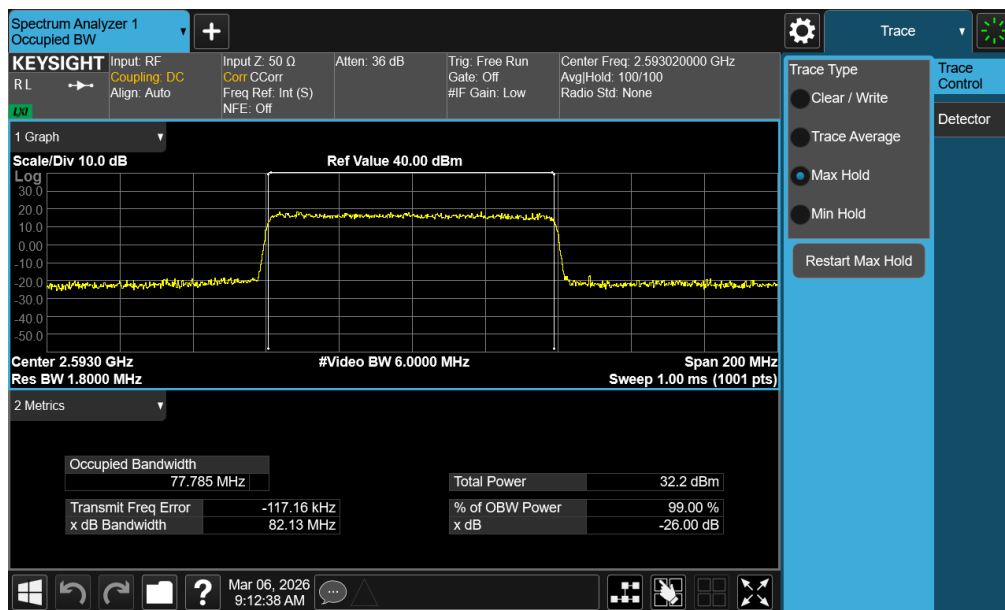


Plot 7-18. Occupied Bandwidth Plot (NR Band n41 PC2 – 80MHz QPSK – Full RB – Default – Ant1)


FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 37 of 145

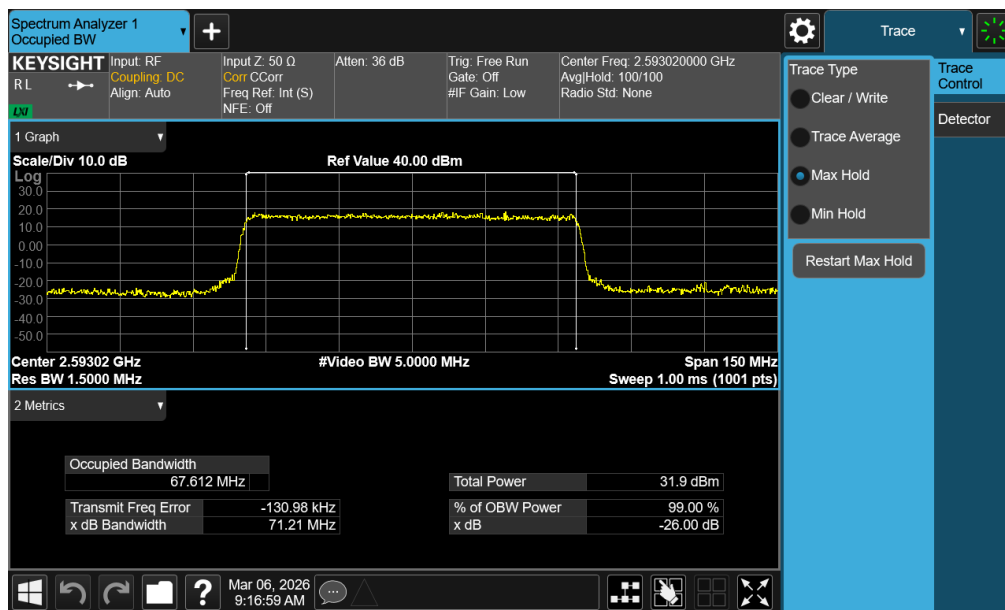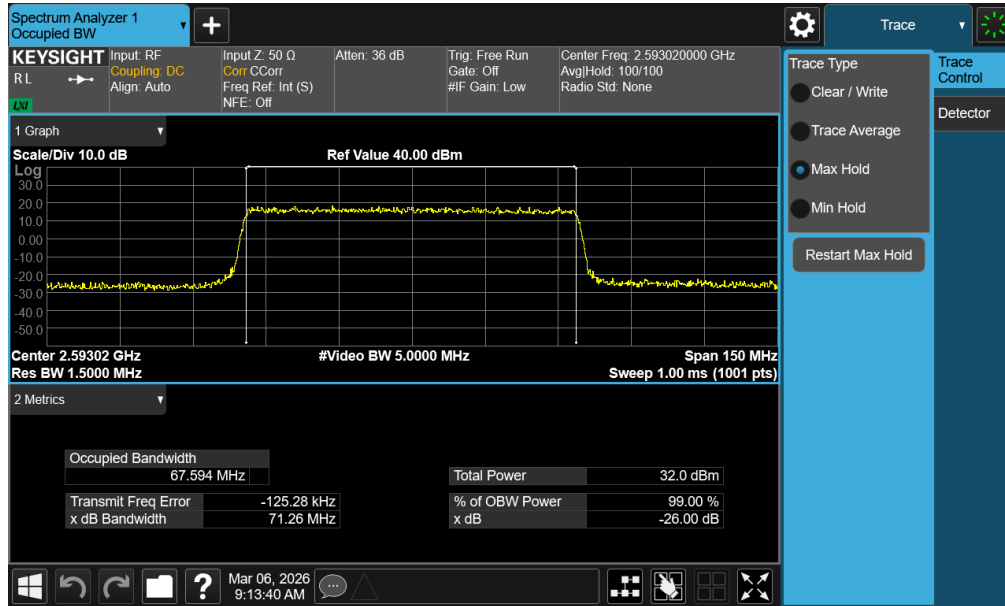

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 39 of 145

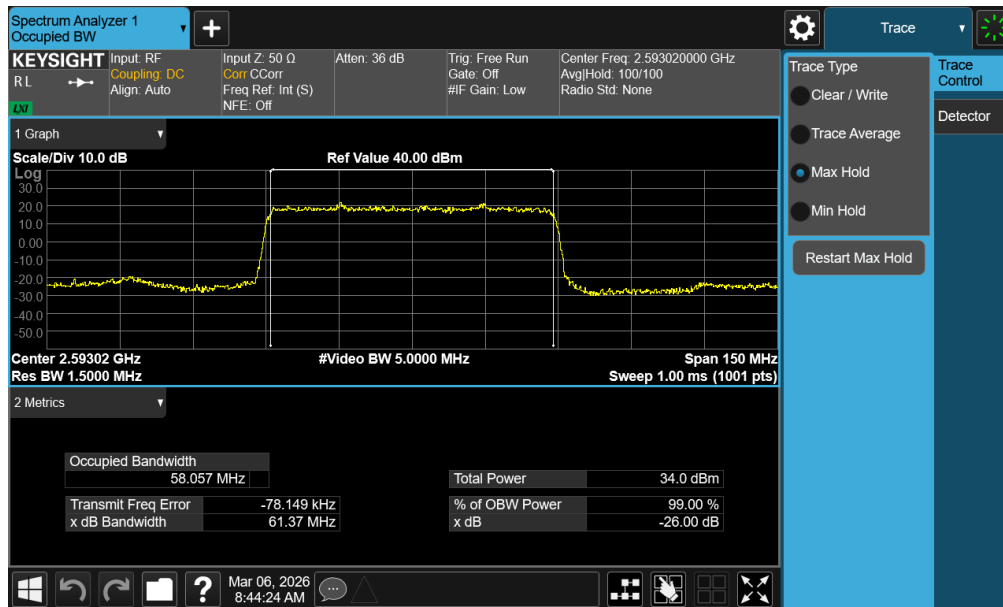


Plot 7-23. Occupied Bandwidth Plot (NR Band n41 PC2 – 60MHz $\pi/2$ BPSK – Full RB – Default – Ant1)

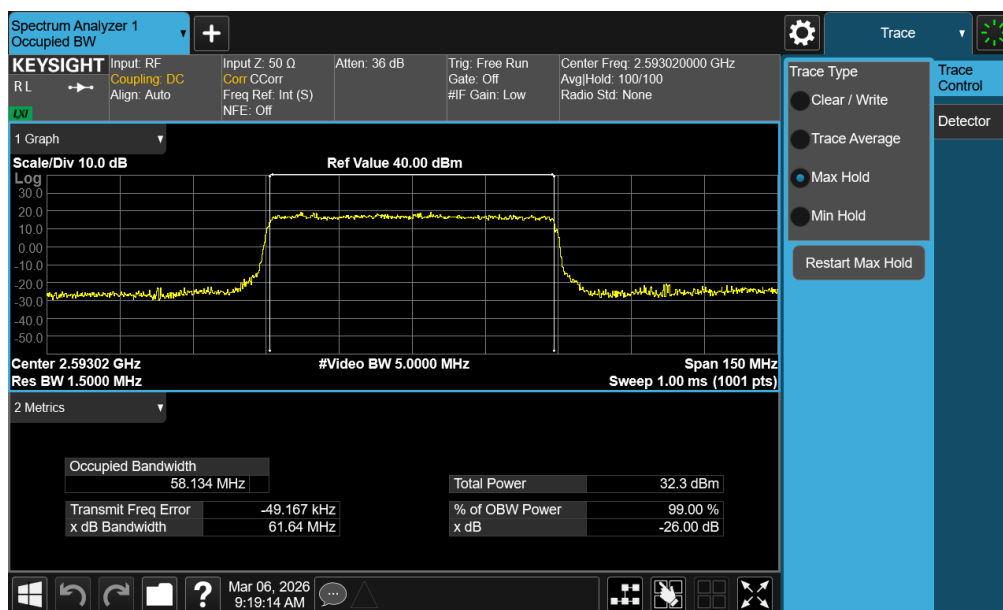


Plot 7-24. Occupied Bandwidth Plot (NR Band n41 PC2 – 60MHz QPSK – Full RB – Default – Ant1)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 40 of 145


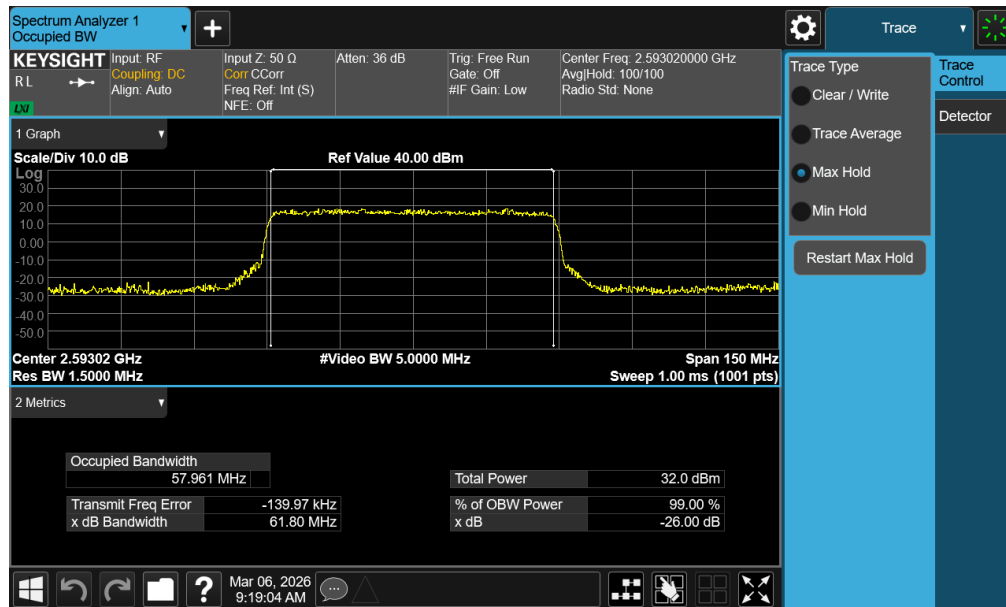


Plot 7-25. Occupied Bandwidth Plot (NR Band n41 PC2 – 60MHz 16-QAM – Full RB – Default – Ant1)

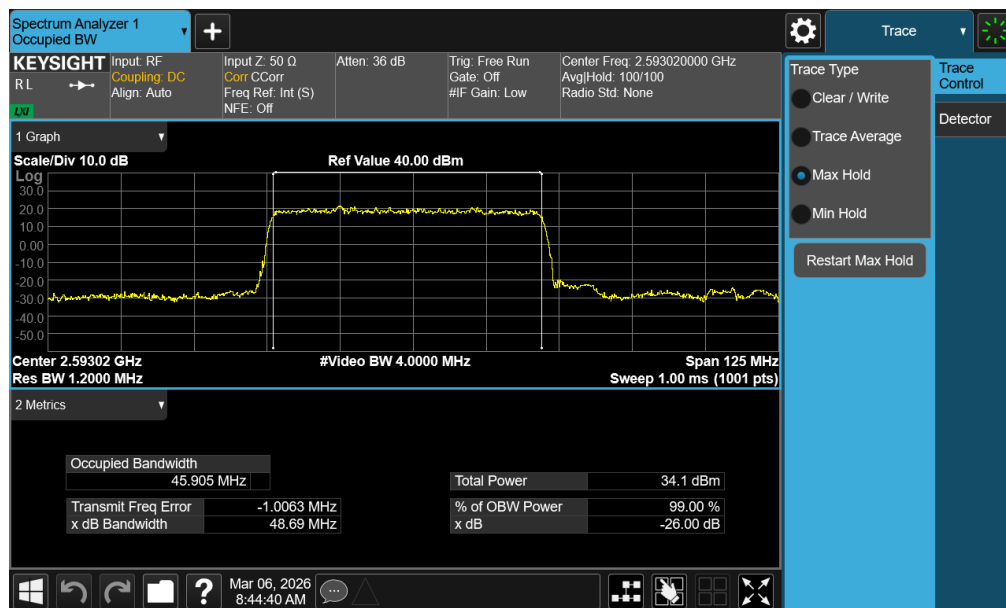


Plot 7-26. Occupied Bandwidth Plot (NR Band n41 PC2 – 50MHz $\pi/2$ BPSK – Full RB – Default – Ant1)


FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 41 of 145

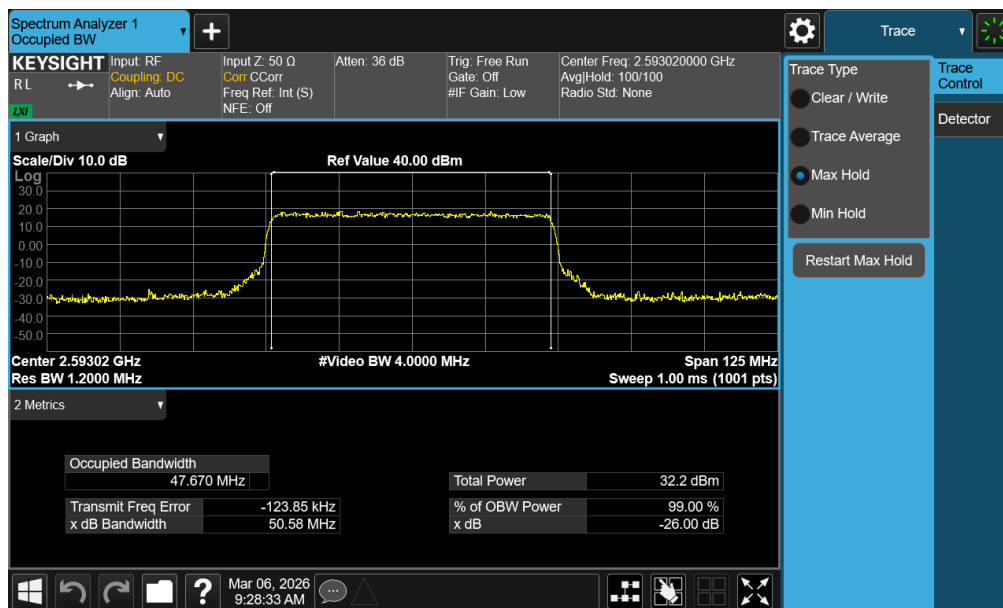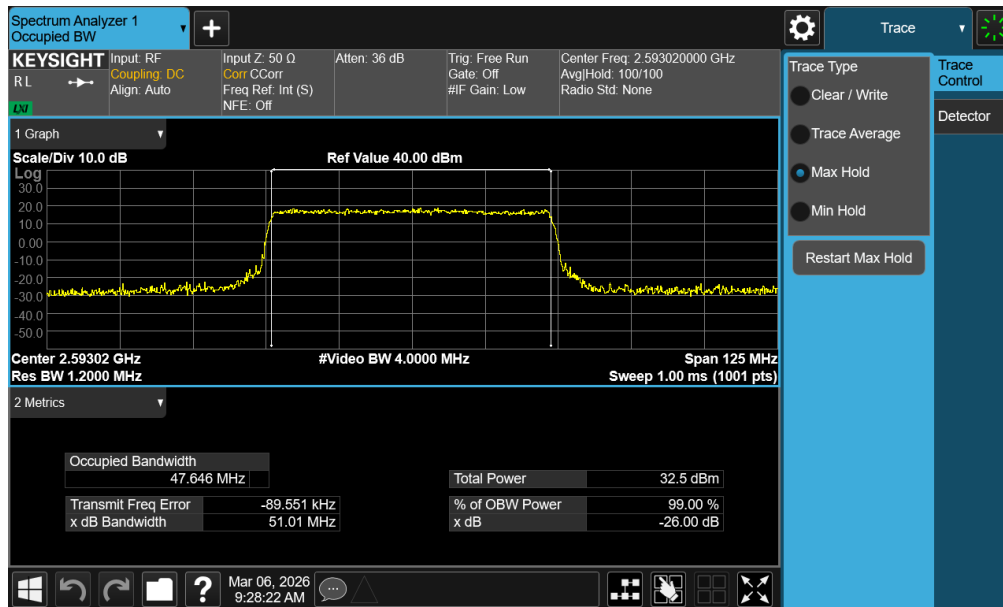

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 42 of 145

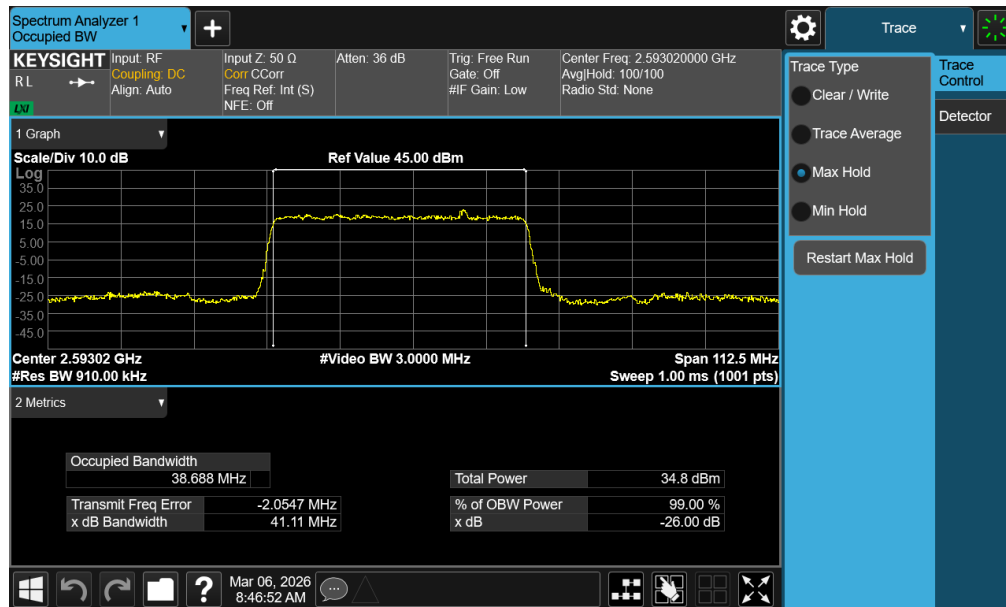


Plot 7-29. Occupied Bandwidth Plot (NR Band n41 PC2 – 45MHz $\pi/2$ BPSK – Full RB – Default – Ant1)

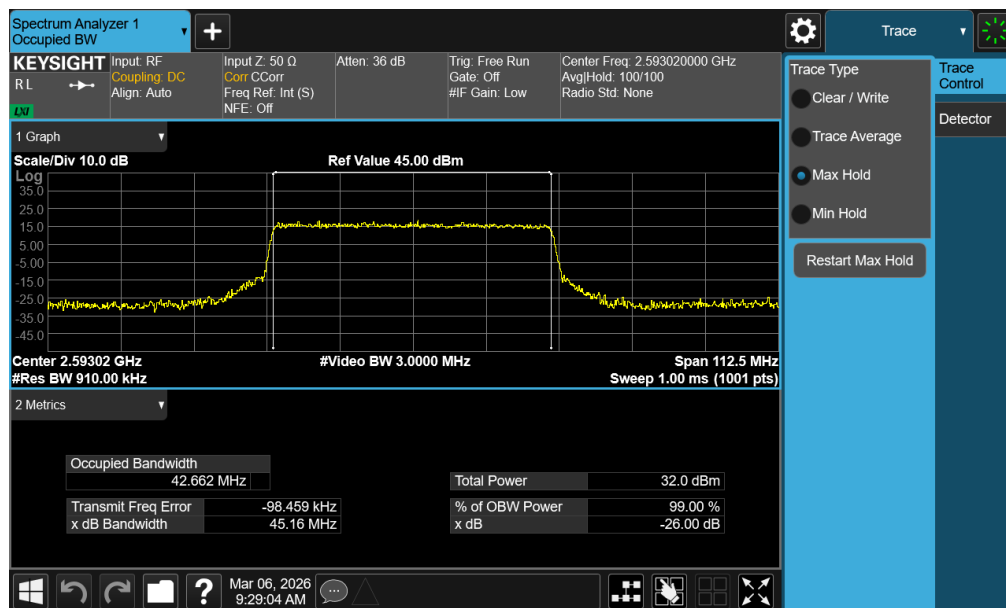


Plot 7-30. Occupied Bandwidth Plot (NR Band n41 PC2 – 45MHz QPSK – Full RB – Default – Ant1)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 43 of 145


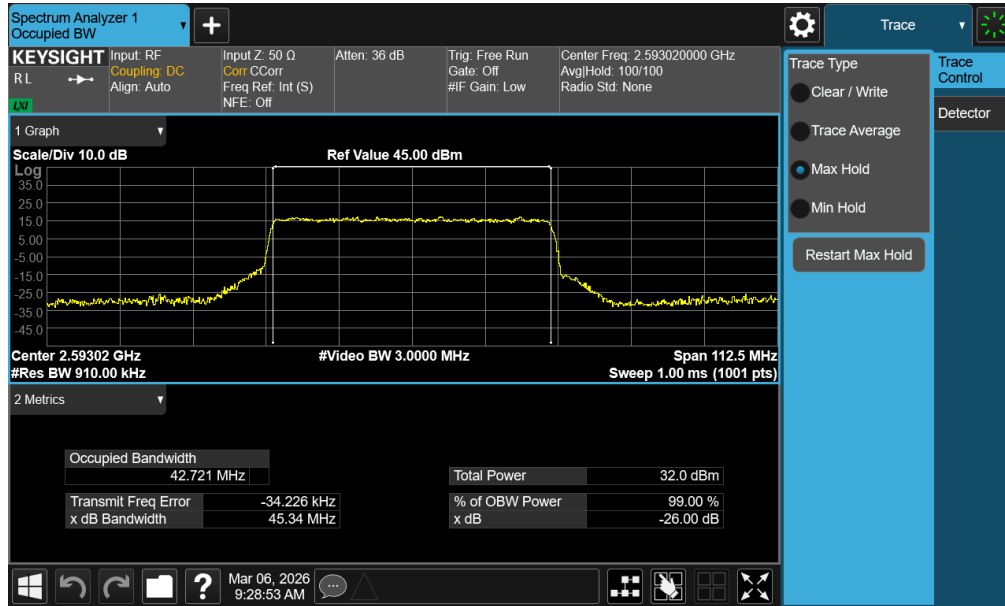


Plot 7-31. Occupied Bandwidth Plot (NR Band n41 PC2 – 45MHz 16-QAM – Full RB – Default – Ant1)

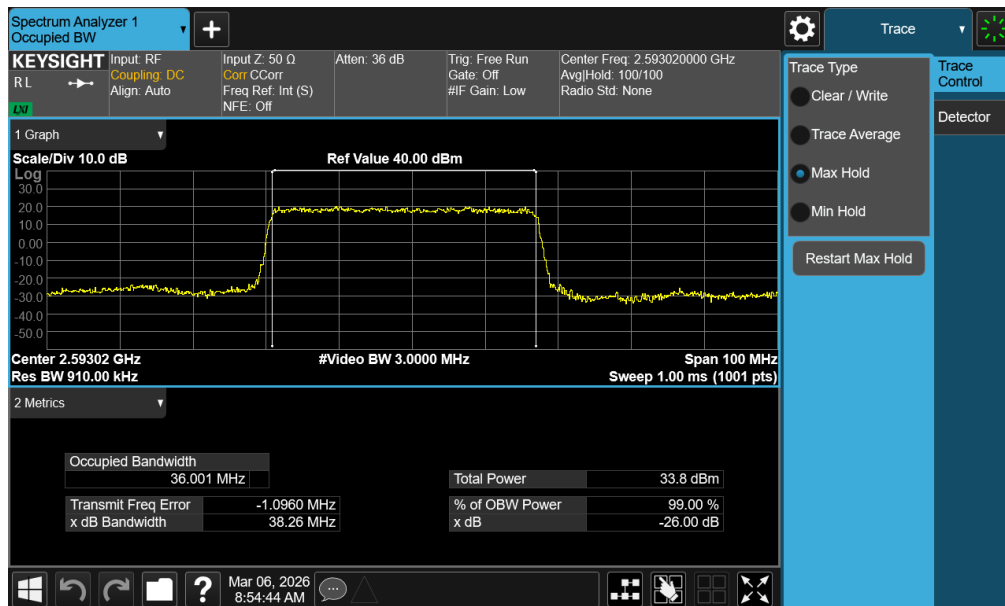


Plot 7-32. Occupied Bandwidth Plot (NR Band n41 PC2 – 40MHz $\pi/2$ BPSK – Full RB – Default – Ant1)


FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 44 of 145

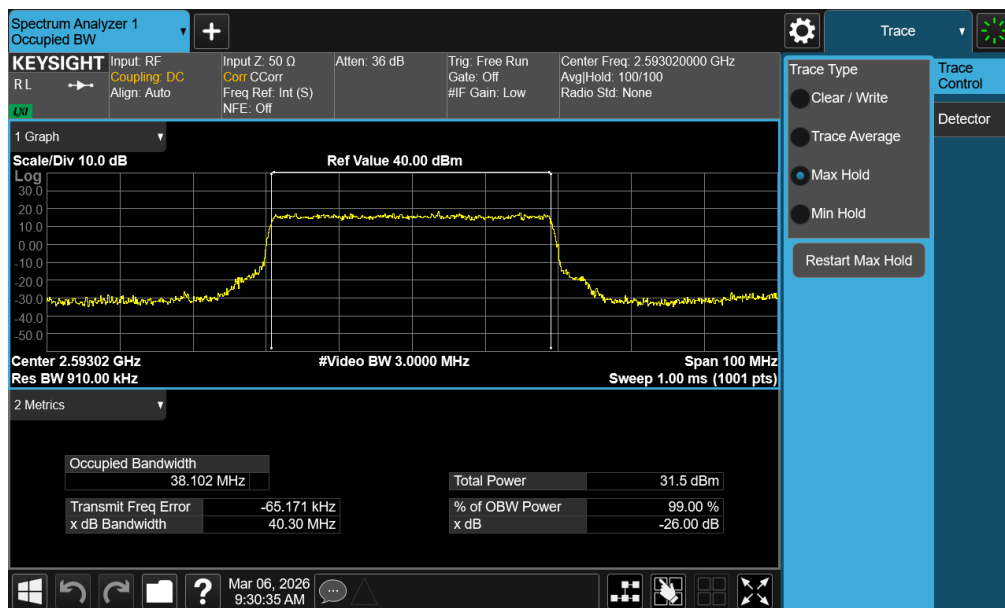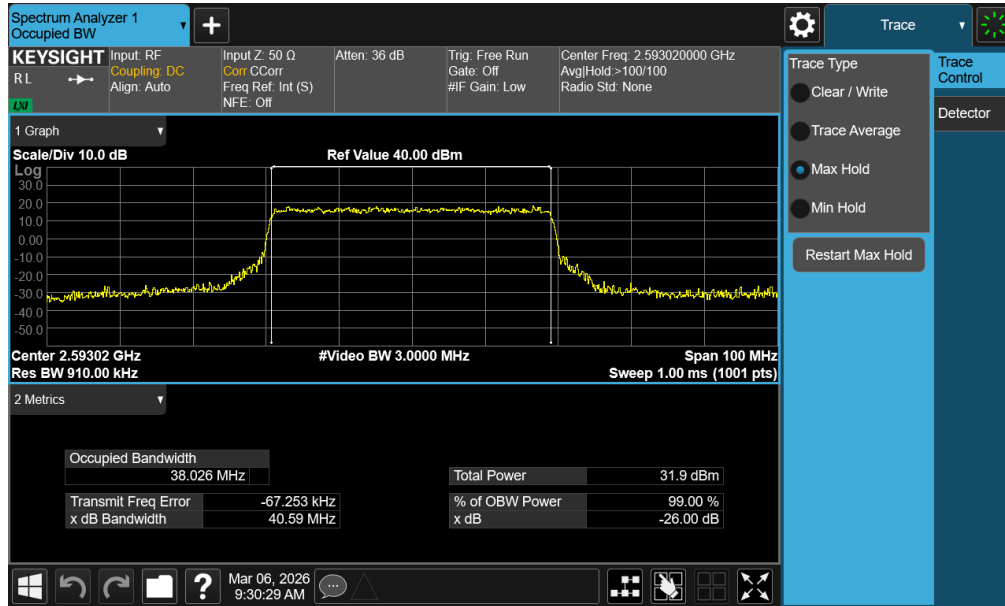

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 45 of 145

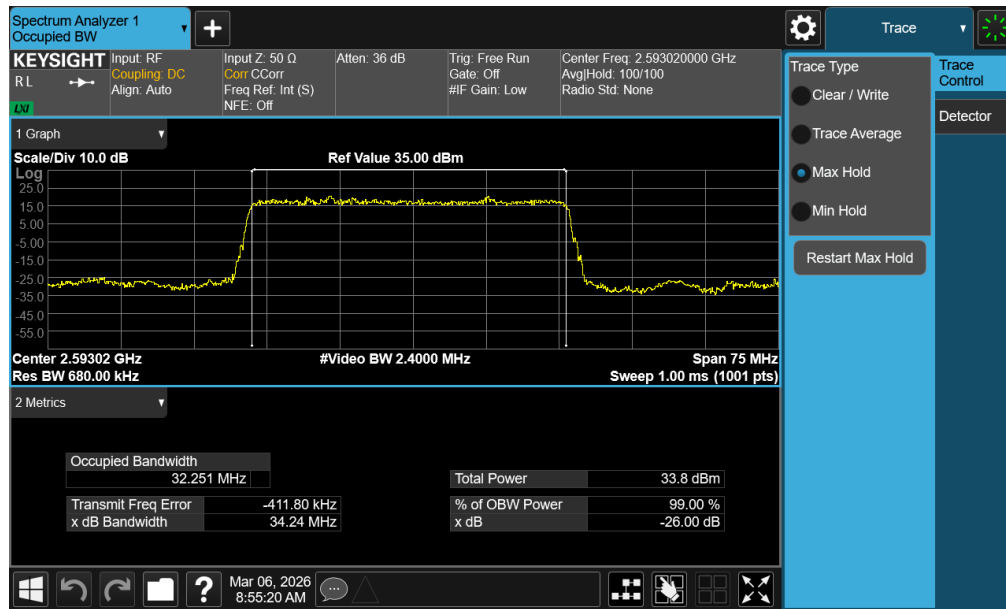


Plot 7-35. Occupied Bandwidth Plot (NR Band n41 PC2 – 35MHz $\pi/2$ BPSK – Full RB – Default – Ant1)

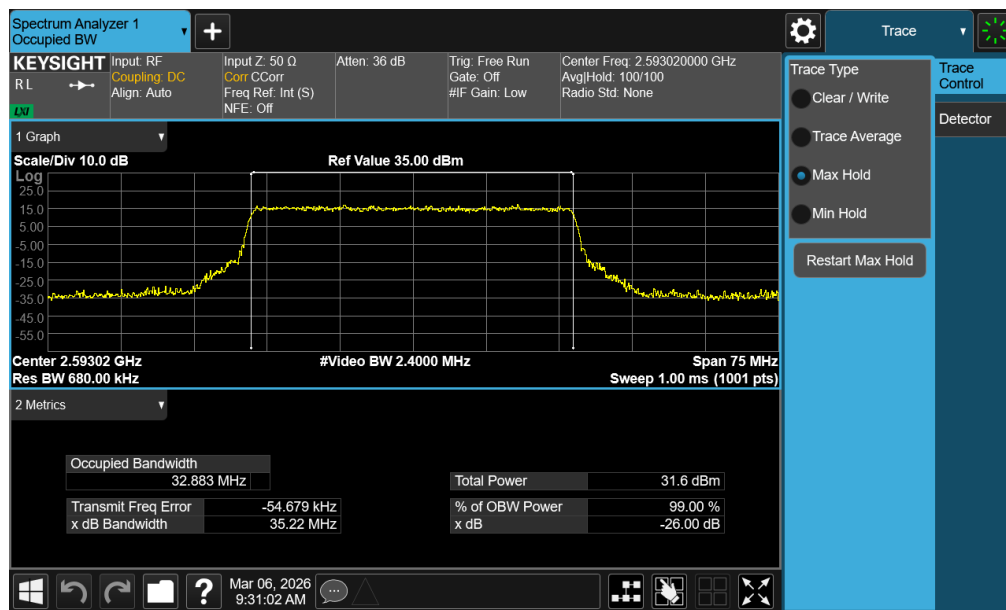


Plot 7-36. Occupied Bandwidth Plot (NR Band n41 PC2 – 35MHz QPSK – Full RB – Default – Ant1)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 46 of 145


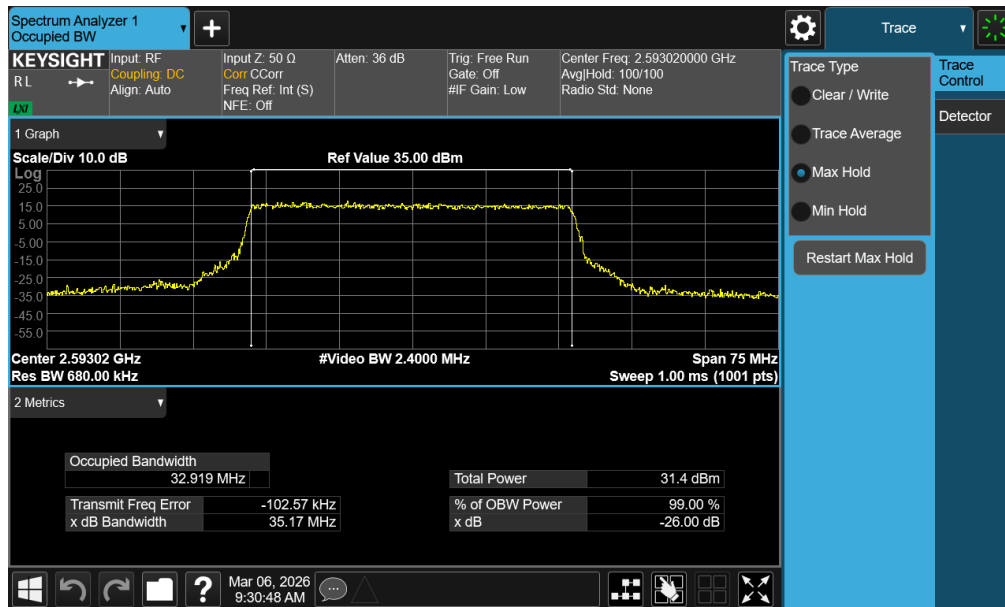


Plot 7-37. Occupied Bandwidth Plot (NR Band n41 PC2 – 35MHz 16-QAM – Full RB – Default – Ant1)

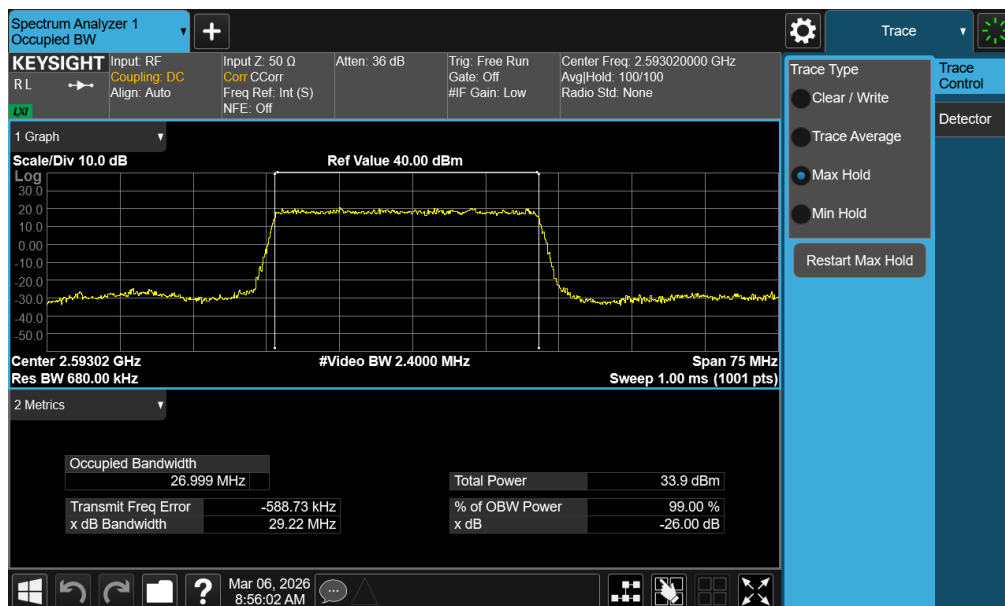


Plot 7-38. Occupied Bandwidth Plot (NR Band n41 PC2 – 30MHz $\pi/2$ BPSK – Full RB – Default – Ant1)


FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 47 of 145

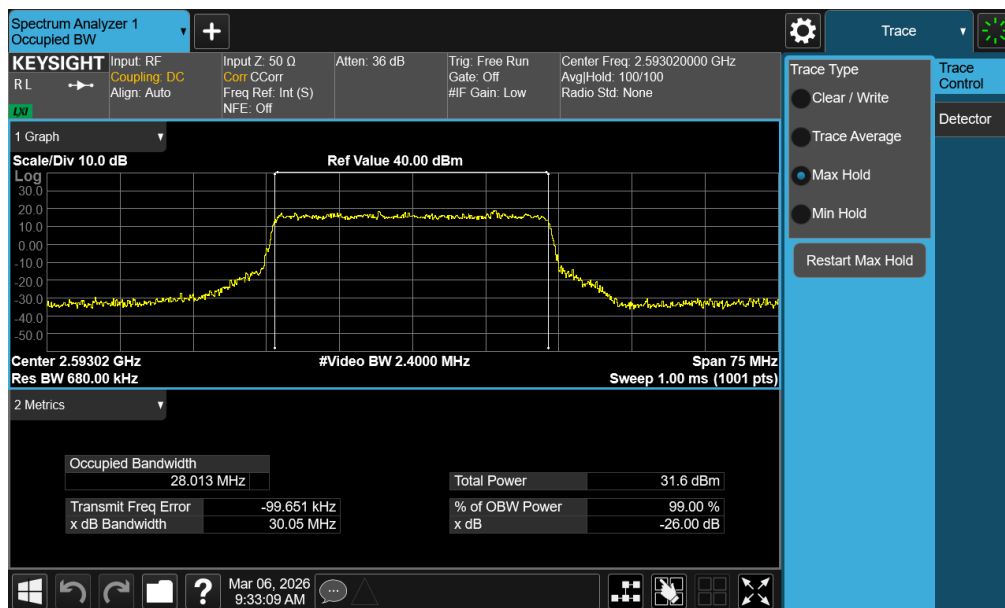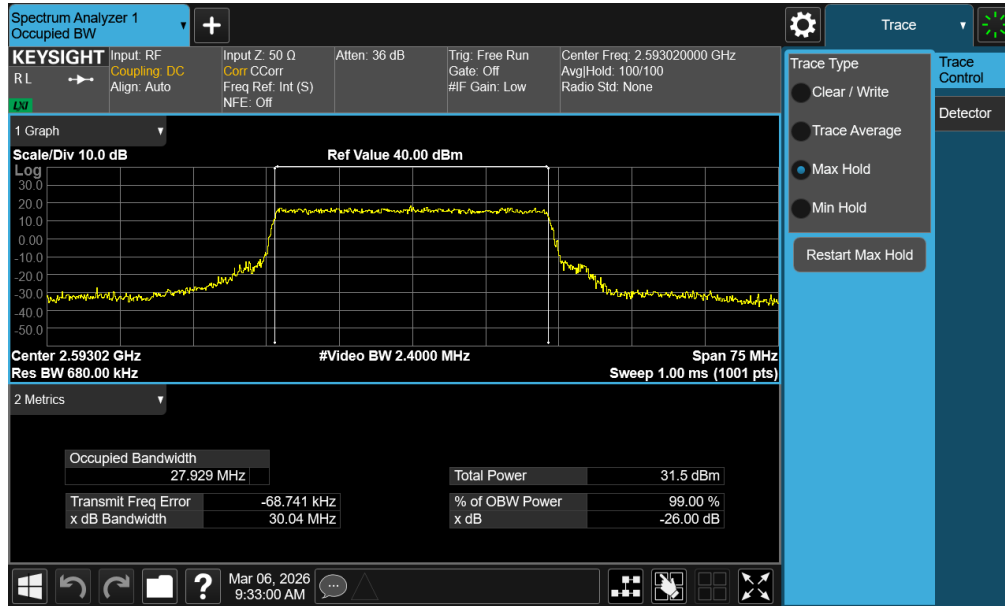

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 48 of 145

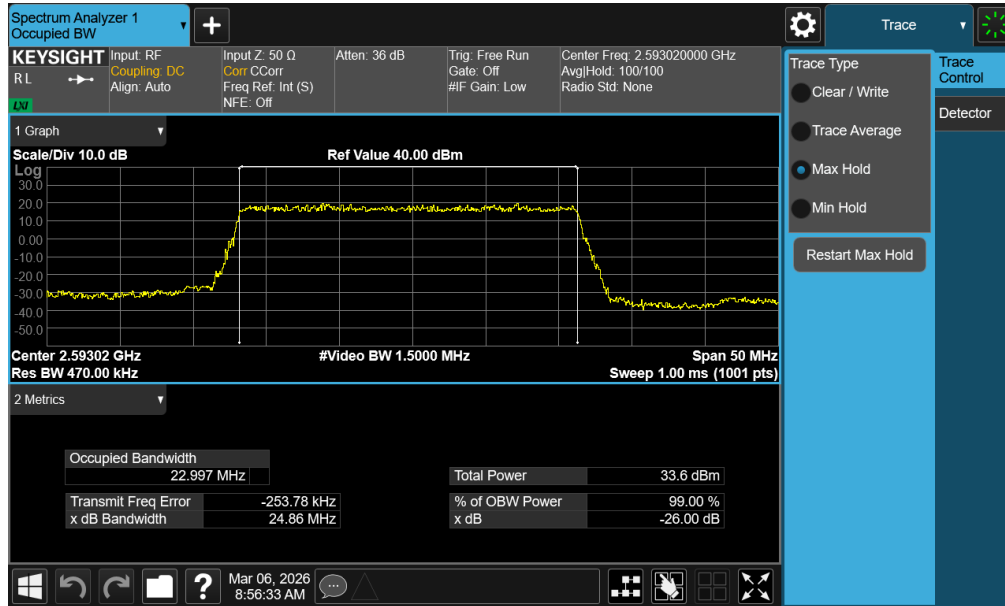


Plot 7-41. Occupied Bandwidth Plot (NR Band n41 PC2 – 25MHz $\pi/2$ BPSK – Full RB – Default – Ant1)

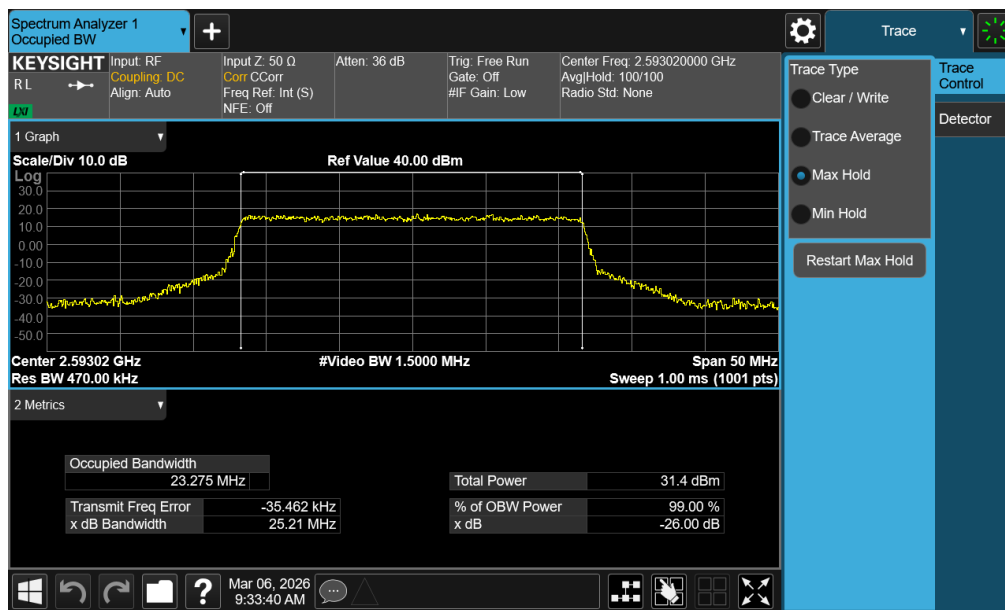


Plot 7-42. Occupied Bandwidth Plot (NR Band n41 PC2 – 25MHz QPSK – Full RB – Default – Ant1)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 49 of 145


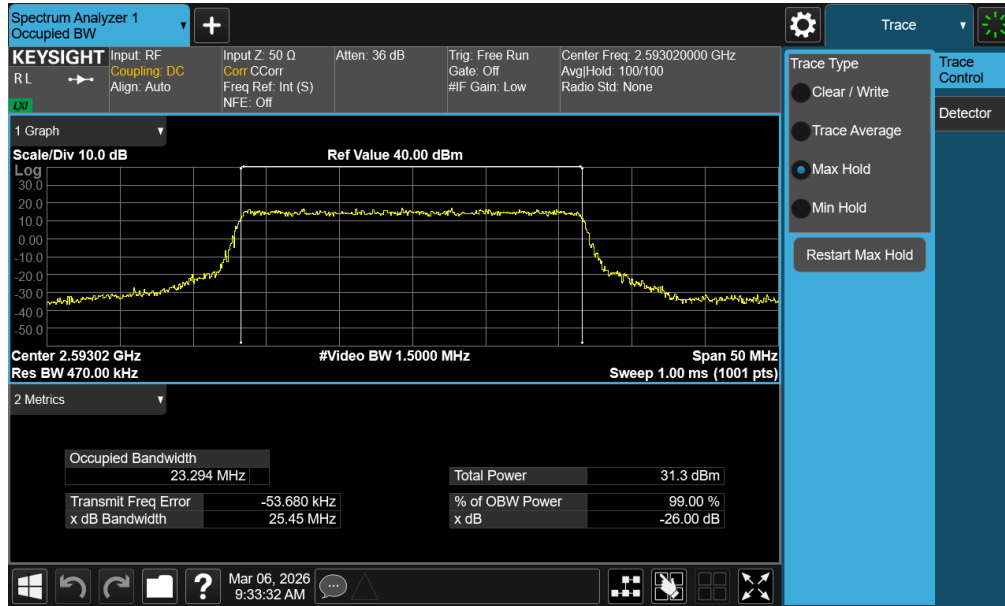


Plot 7-43. Occupied Bandwidth Plot (NR Band n41 PC2 – 25MHz 16-QAM – Full RB – Default – Ant1)

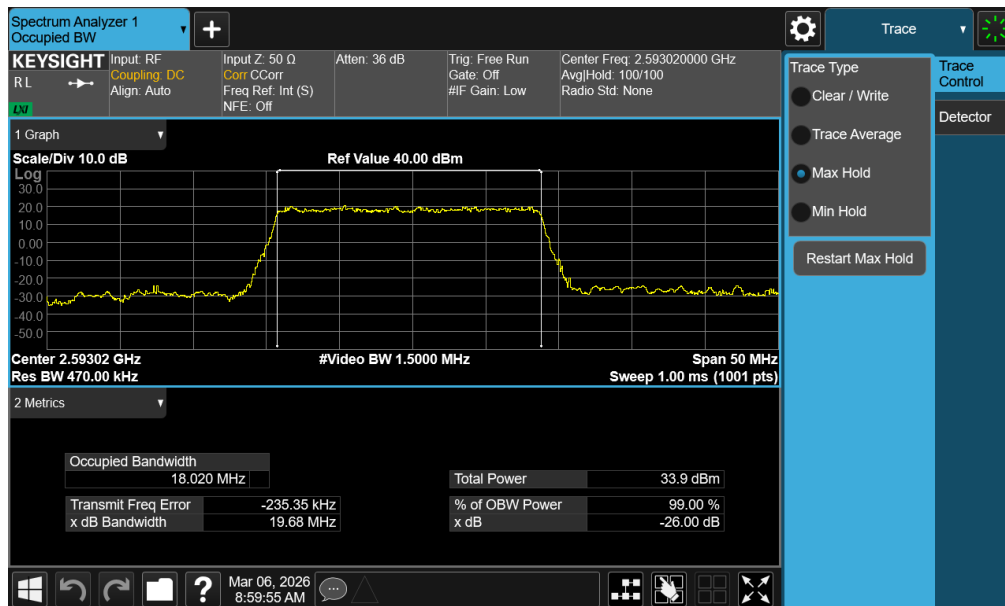


Plot 7-44. Occupied Bandwidth Plot (NR Band n41 PC2 – 20MHz $\pi/2$ BPSK – Full RB – Default – Ant1)


FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 50 of 145

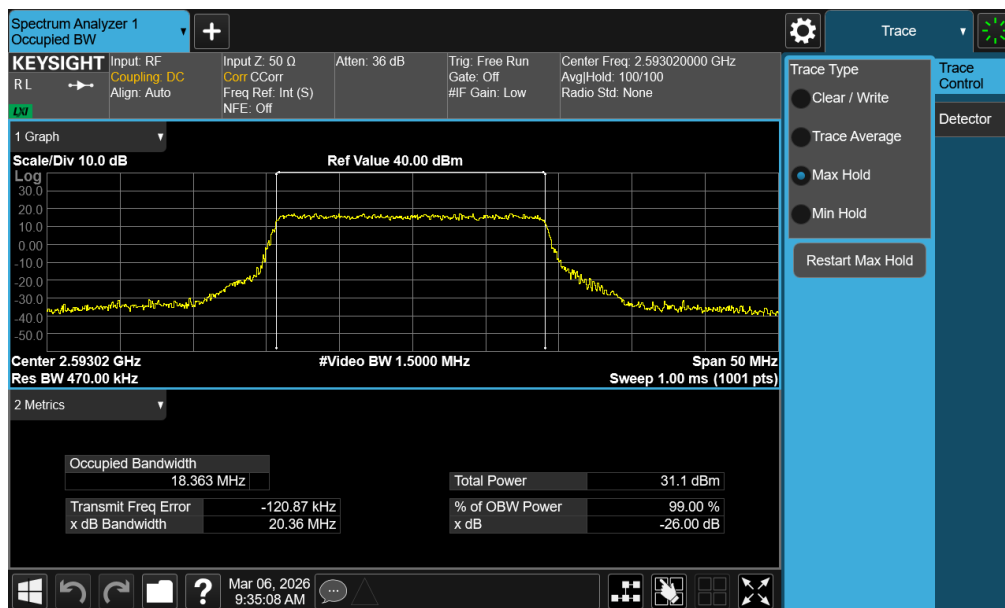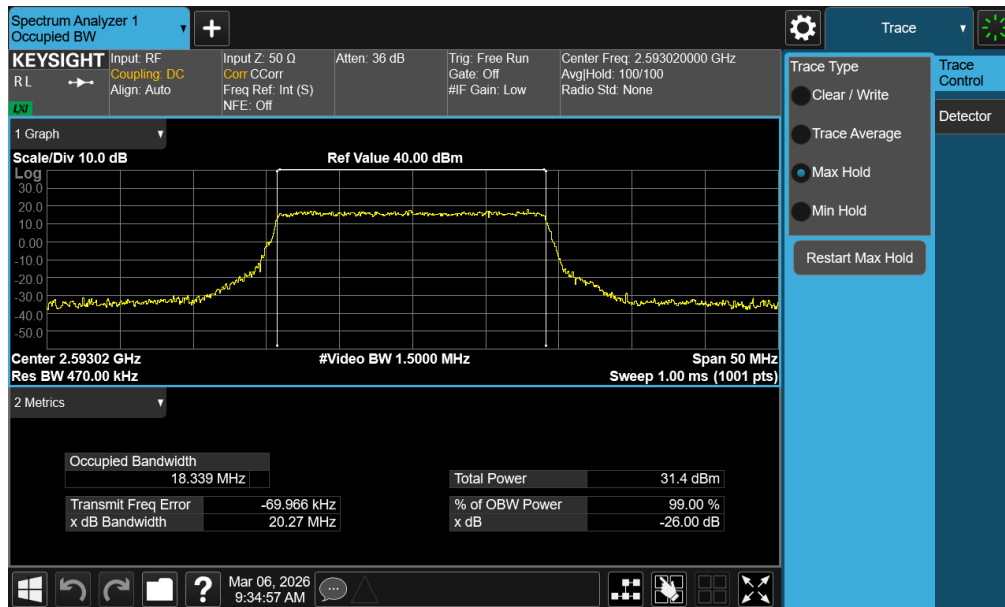

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 51 of 145


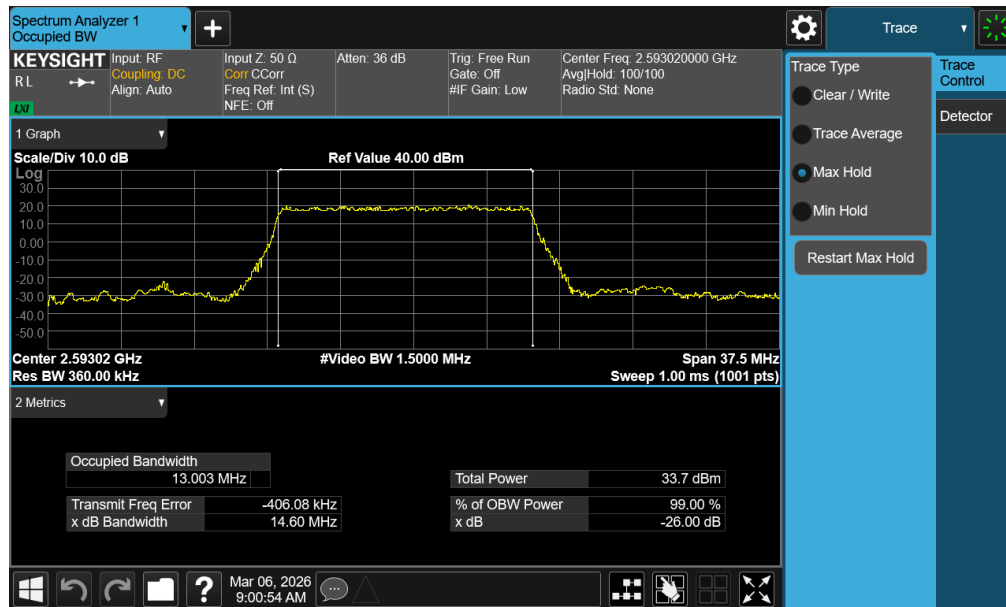


Plot 7-47. Occupied Bandwidth Plot (NR Band n41 PC2 – 15MHz $\pi/2$ BPSK – Full RB – Default – Ant1)


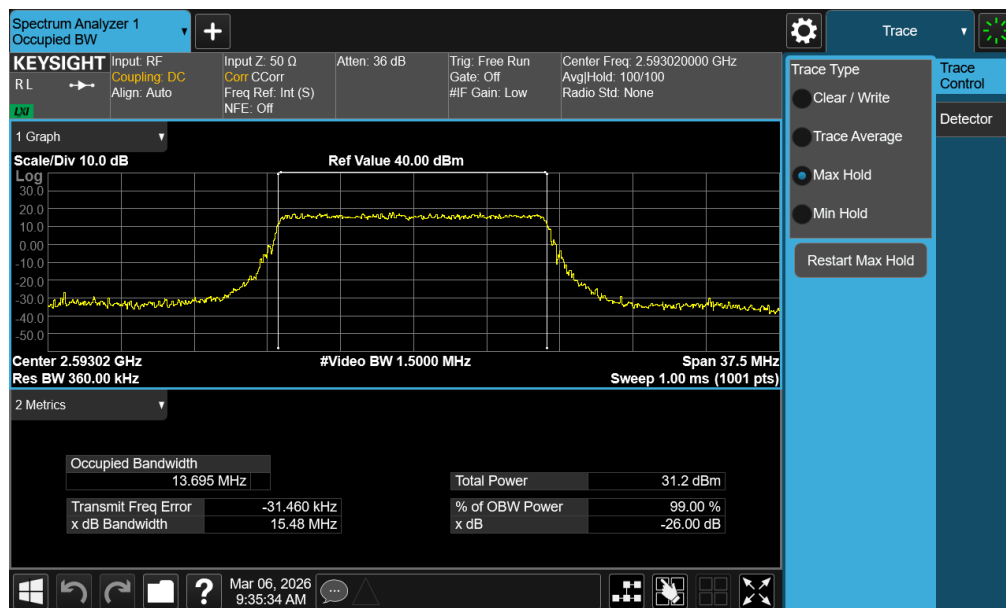


Plot 7-48. Occupied Bandwidth Plot (NR Band n41 PC2 – 15MHz QPSK – Full RB – Default – Ant1)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 52 of 145

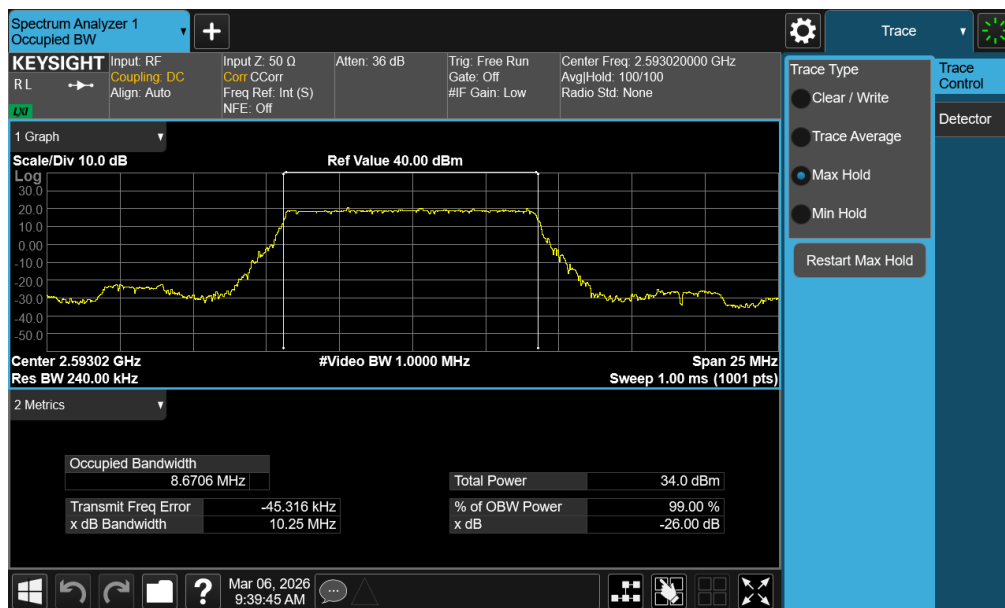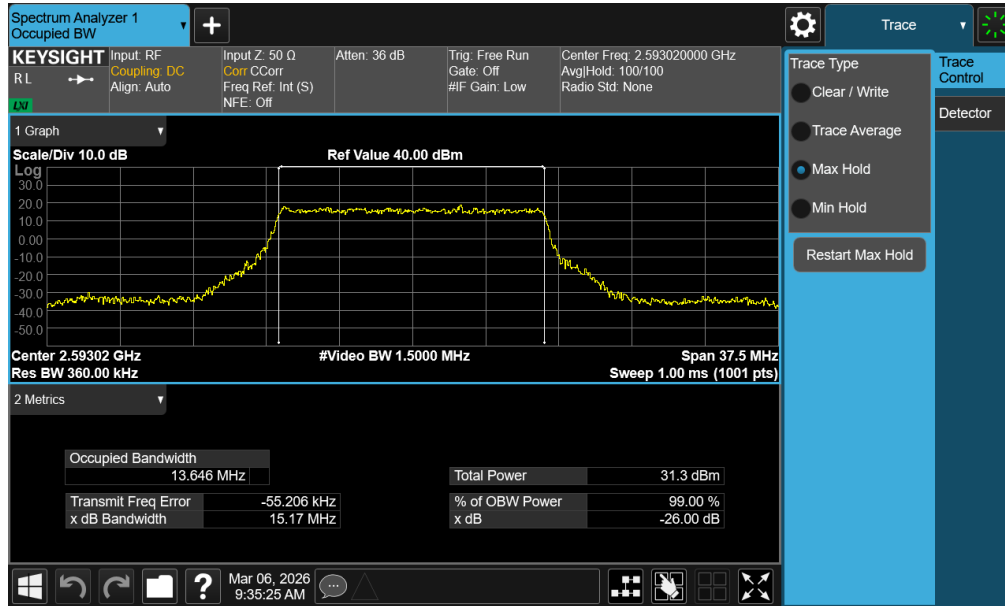


FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 53 of 145

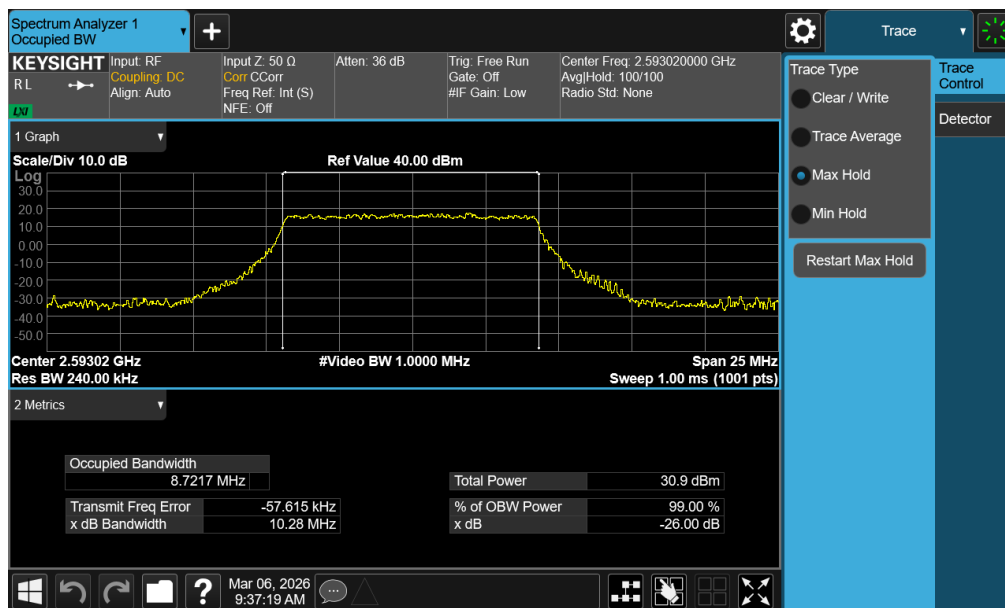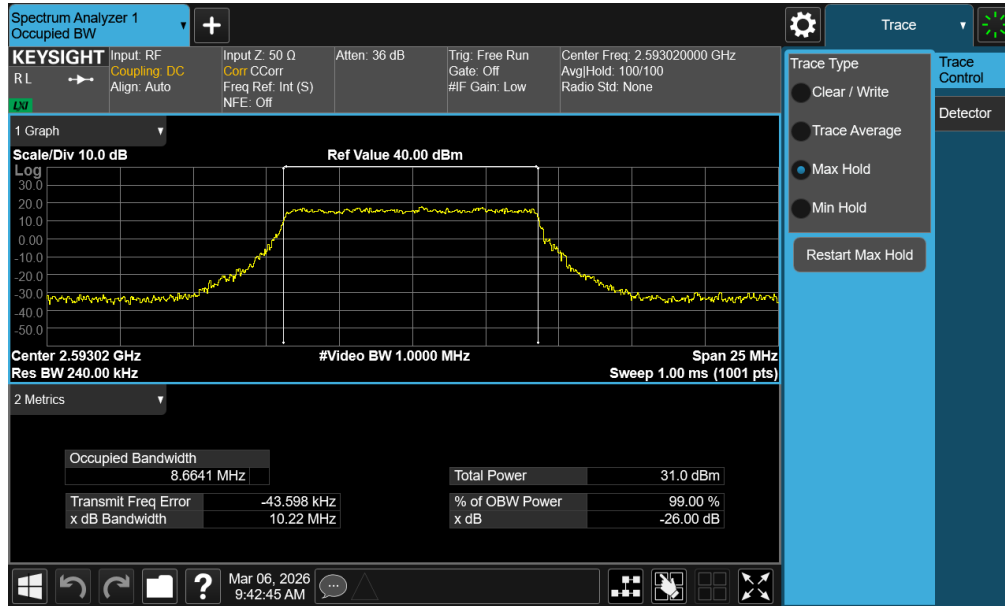


FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 54 of 145

NR Band n41 PC2 – Tx Hopping – Ant1

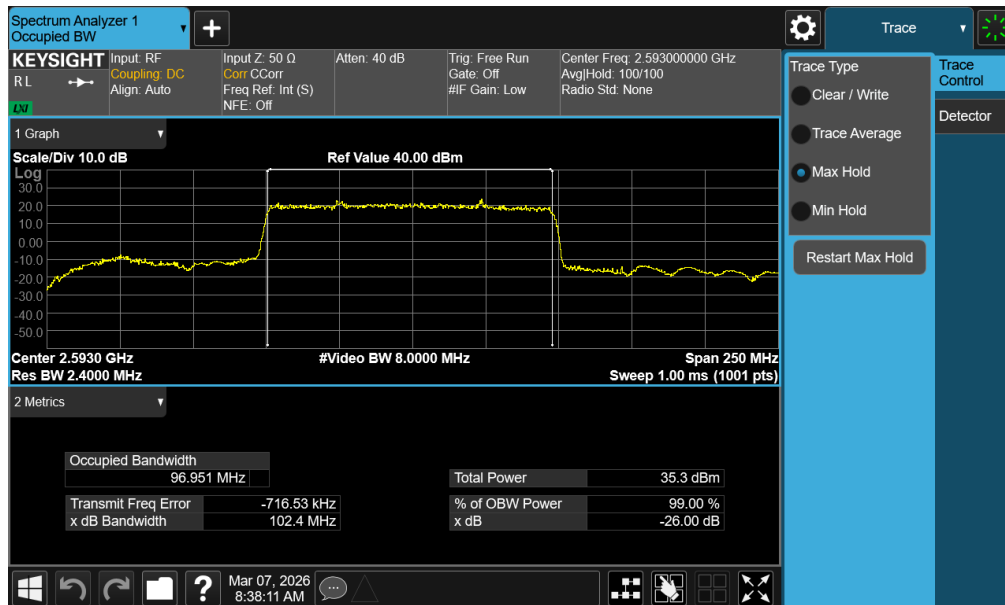


Plot 7-53. Occupied Bandwidth Plot (NR Band n41 PC2 – 100MHz $\pi/2$ BPSK – Full RB – Tx Hopping – Ant1)

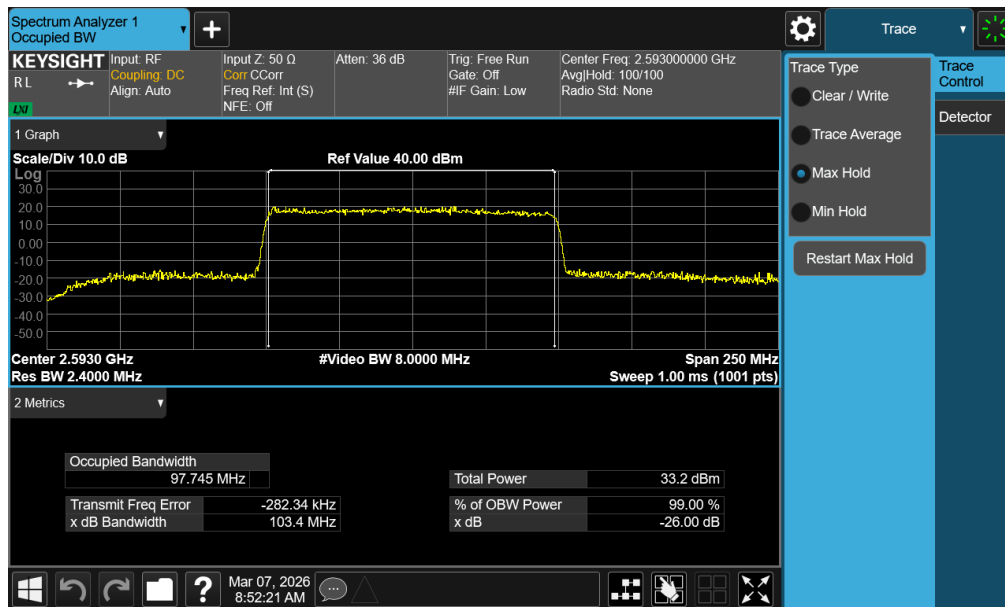


Plot 7-54. Occupied Bandwidth Plot (NR Band n41 PC2 – 100MHz QPSK – Full RB – Tx Hopping – Ant1)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 55 of 145

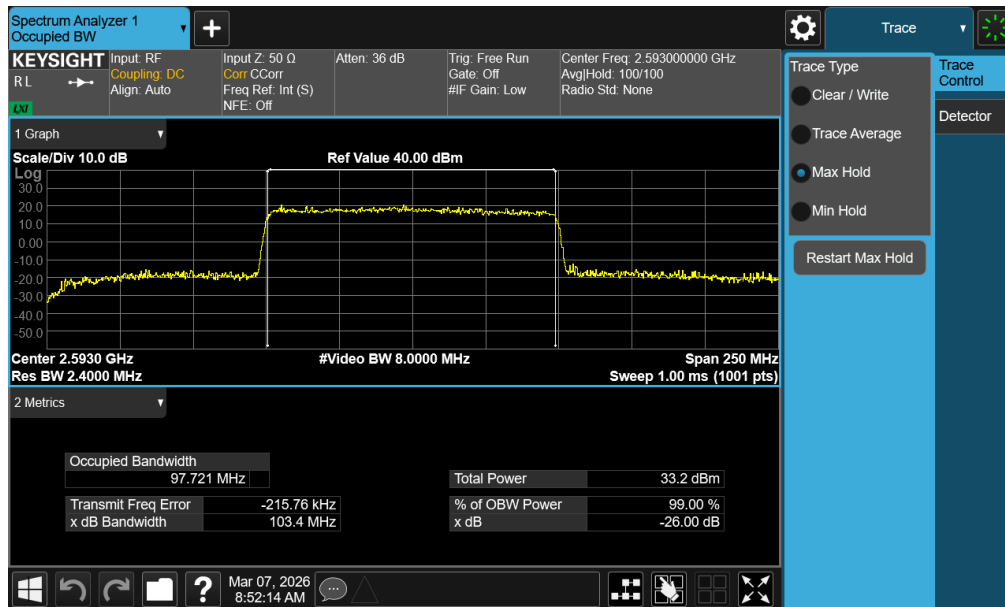


Plot 7-55. Occupied Bandwidth Plot (NR Band n41 PC2 – 100MHz 16-QAM – Full RB – Tx Hopping – Ant1)

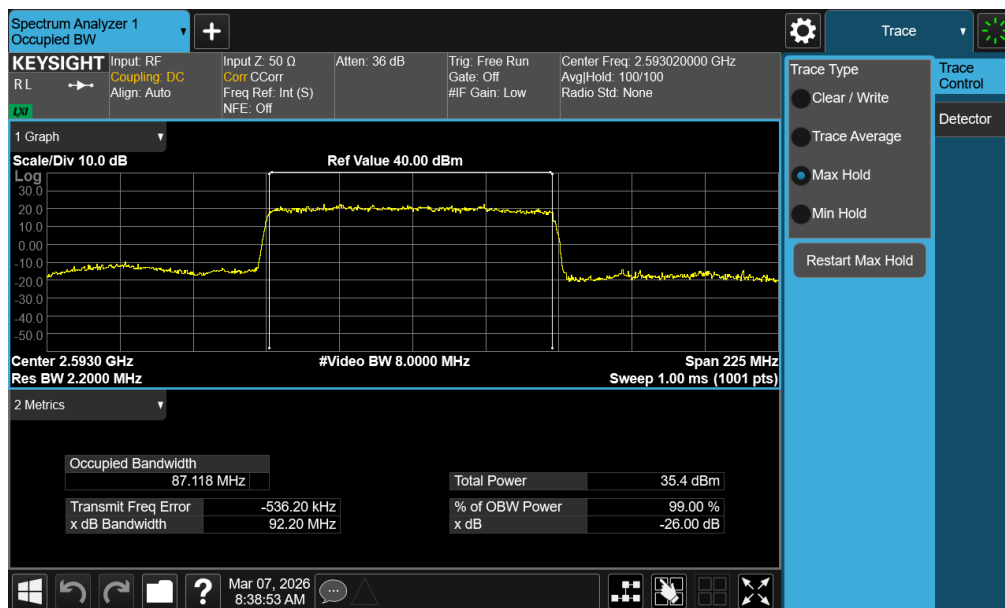


Plot 7-56. Occupied Bandwidth Plot (NR Band n41 PC2 – 90MHz $\pi/2$ BPSK – Full RB – Tx Hopping – Ant1)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 56 of 145


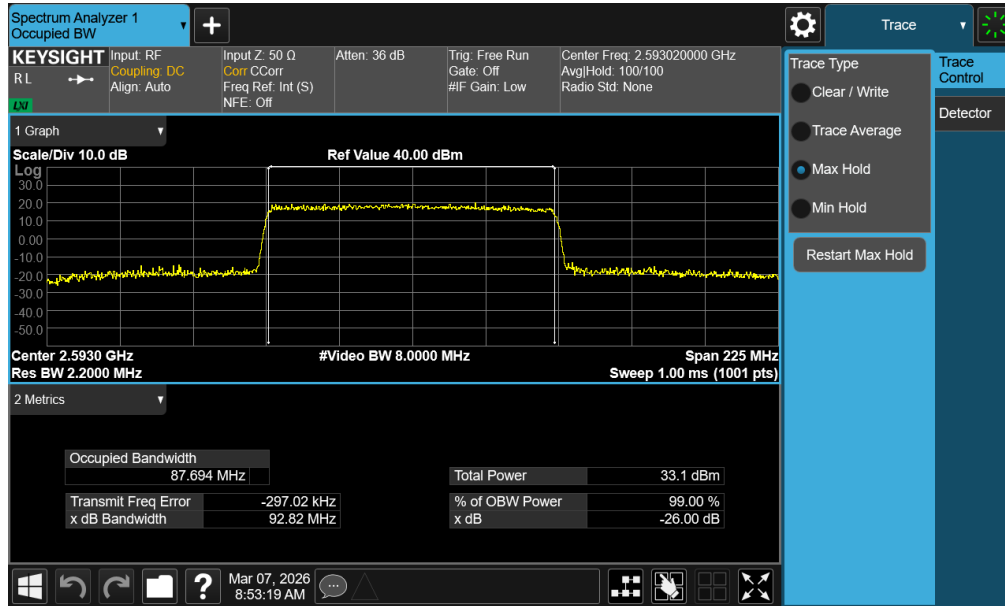


Plot 7-57. Occupied Bandwidth Plot (NR Band n41 PC2 – 90MHz QPSK – Full RB – Tx Hopping – Ant1)


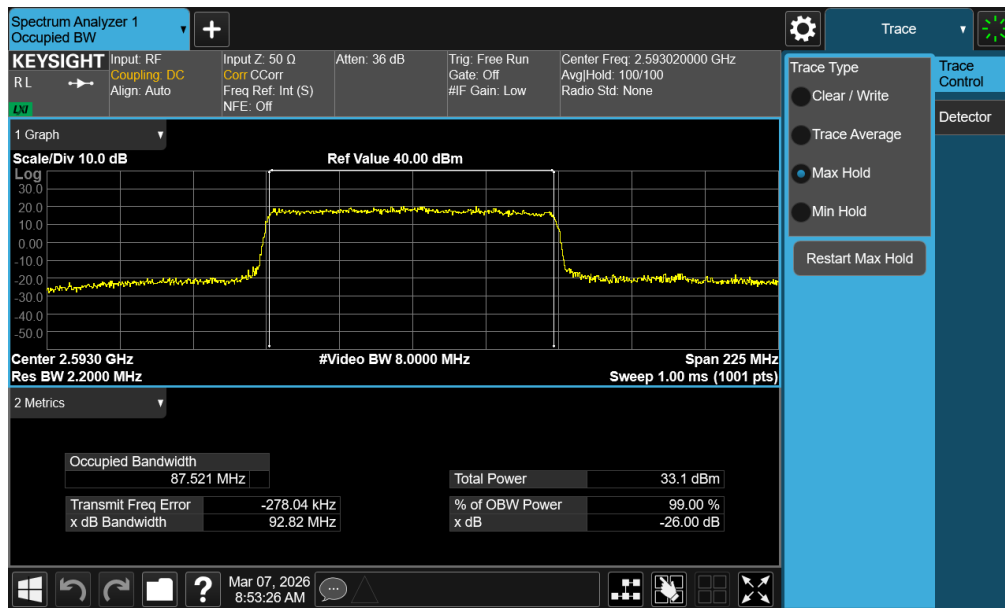


Plot 7-58. Occupied Bandwidth Plot (NR Band n41 PC2 – 90MHz 16-QAM – Full RB – Tx Hopping – Ant1)

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 57 of 145

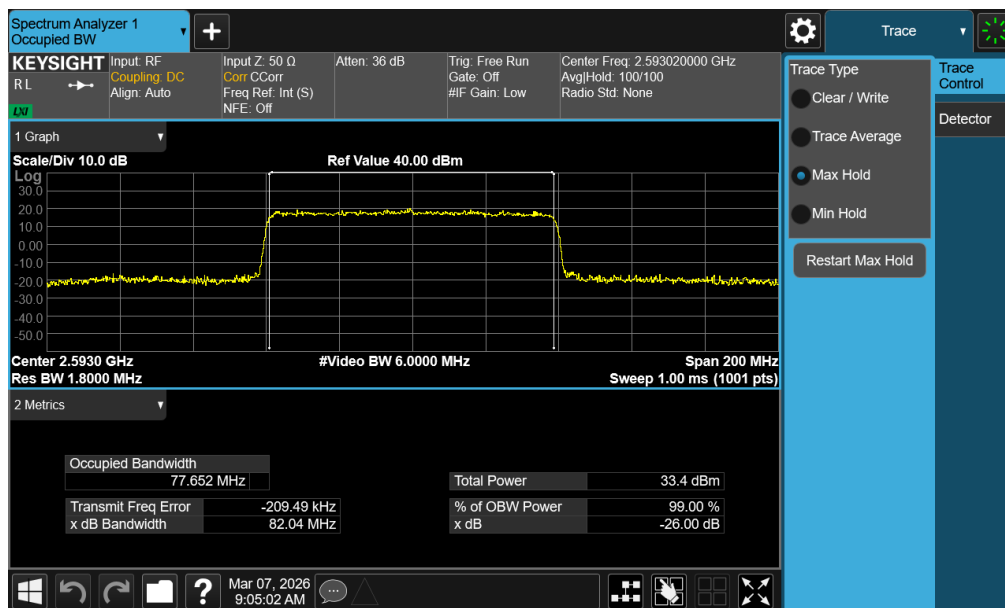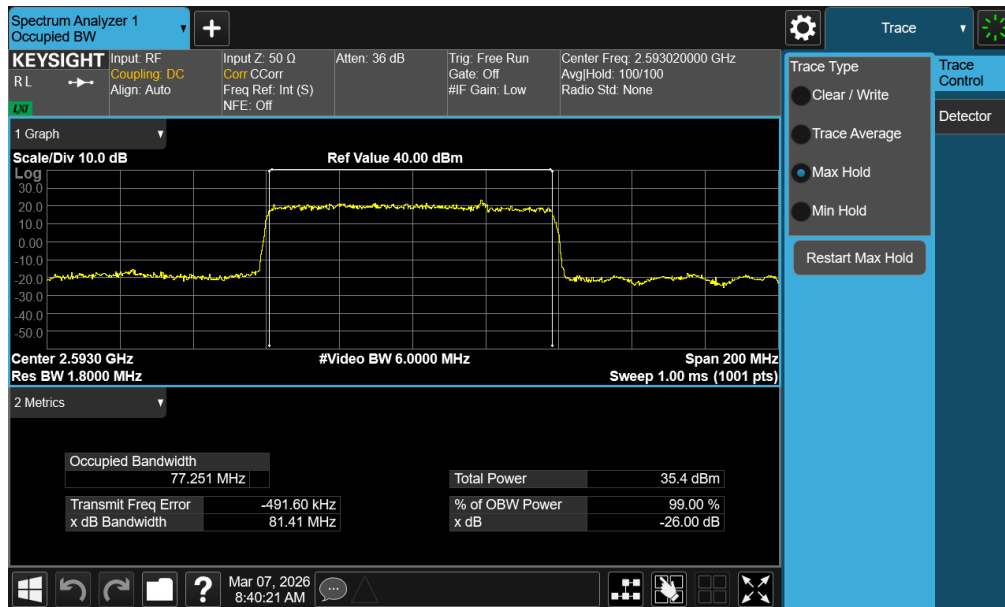

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 58 of 145

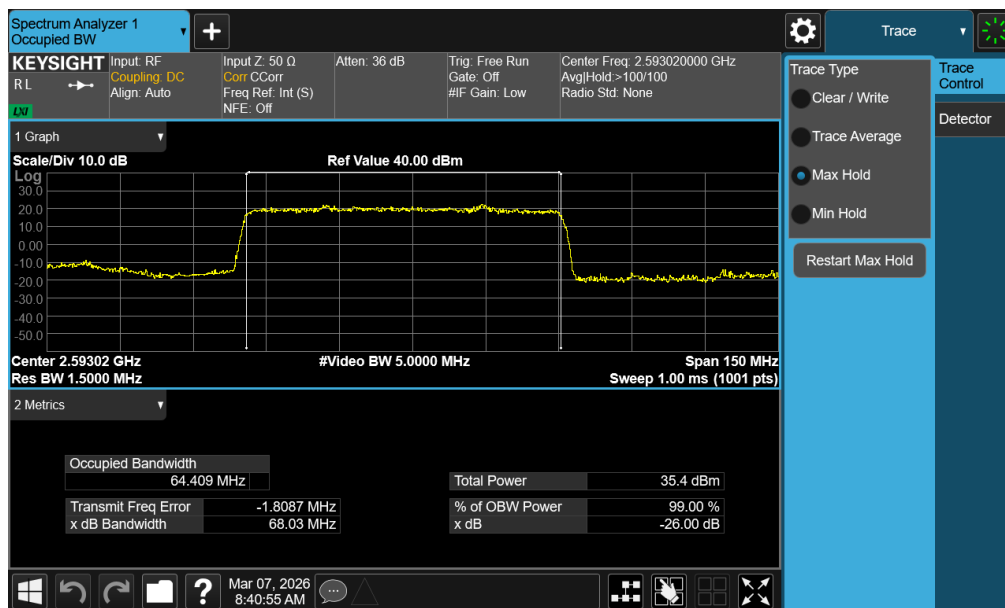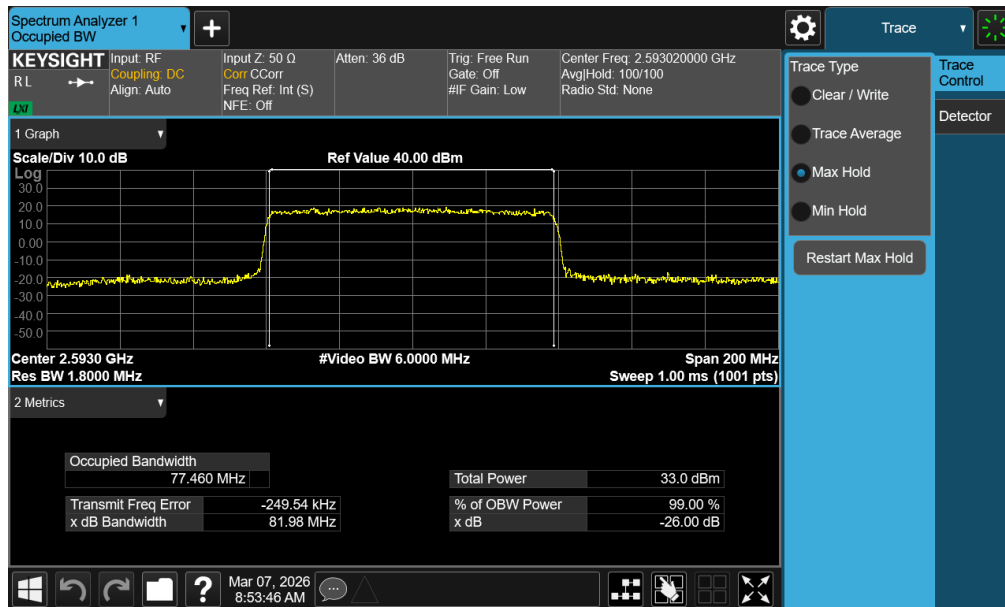

FCC ID: A3LSMF776JPN	PART 27 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 5/15/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2604240033-04-R1-A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 59 of 145