



**ELEMENT MATERIALS TECHNOLOGY,
Columbia MD**

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
<http://www.element.com>

**PART 27 | RSS-130 & RSS-139
MEASUREMENT REPORT**

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

2/24/2026 - 4/17/2026

Test Report Issue Date:

5/11/2026

Test Site/Location:

Element Lab., Columbia, MD, USA

Test Report Serial No.:

1M2602190015-05-R2.A3L

FCC ID:

A3LSMF776U

IC:

649E-SMF776W

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-F776U

HVIN:

SM-F776W

Additional Model(s):

SM-F776U1

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part:

27

ISED Specification:

RSS-Gen, RSS-130 Issue 2, RSS-139 Issue 4

Test Procedure(s):

ANSI C63.26-2015, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N:1M2602190015-05-R2.A3L) supersedes and replaces the previously issued test report (S/N: 1M2602190015-05-R1.A3L) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**RJ Ortanez
Executive Vice President**



FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 1 of 318

TEST REPORT REVISION HISTORY

Rev. No.	Description	Issue Date	Revised By
-	Initial Release	4/23/2026	WKR0000005883
1	Addressed comments made by TCB reviewer	5/5/2026	WKR0000005883
2	Addressed comments made by TCB reviewer	5/11/2026	WKR0000005883

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 2 of 318

T A B L E O F C O N T E N T S

1.0	INTRODUCTION	12
1.1	Scope	12
1.2	Element Test Location.....	12
1.3	Test Facility / Accreditations.....	12
2.0	PRODUCT INFORMATION.....	13
2.1	Equipment Description	13
2.2	Device Capabilities.....	13
2.3	Test Configuration	13
2.4	Software and Firmware	13
2.5	EMI Suppression Device(s)/Modifications	13
3.0	DESCRIPTION OF TESTS	14
3.1	Evaluation Procedure	14
3.2	Radiated Power and Radiated Spurious Emissions	14
4.0	MEASUREMENT UNCERTAINTY	15
5.0	TEST EQUIPMENT CALIBRATION DATA	16
6.0	SAMPLE EMISSION DESIGNATORS	19
7.0	TEST RESULTS	20
7.1	Summary	20
7.2	Conducted Output Power Data	23
7.3	Occupied Bandwidth	30
7.4	Spurious and Harmonic Emissions at Antenna Terminal	138
7.5	Band Edge Emissions at Antenna Terminal	176
7.6	Peak-Average Ratio	214
7.7	Radiated Power (ERP/EIRP).....	259
7.8	Radiated Spurious Emissions Measurements	272
7.9	Frequency Stability / Temperature Variation	308
8.0	CONCLUSION.....	318

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 3 of 318

MEASUREMENT REPORT

FCC Part 27 | ISSED RSS-130 & RSS-139

Antenna-1						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	ERP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
LTE Band 71	20 MHz	QPSK	673.0 - 688.0	0.104	20.19	18M0G7D
		16QAM	673.0 - 688.0	0.078	18.92	18M0W7D
	15 MHz	QPSK	670.5 - 690.5	0.103	20.13	13M5G7D
		16QAM	670.5 - 690.5	0.082	19.12	13M6W7D
	10 MHz	QPSK	668.0 - 693.0	0.100	20.02	9M01G7D
		16QAM	668.0 - 693.0	0.079	19.00	9M04W7D
	5 MHz	QPSK	665.5 - 695.5	0.102	20.09	4M53G7D
		16QAM	665.5 - 695.5	0.086	19.36	4M54W7D
LTE Band 12	10 MHz	QPSK	704.0 - 711.0	0.115	20.61	9M05G7D
		16QAM	704.0 - 711.0	0.068	18.31	9M07W7D
	5 MHz	QPSK	701.5 - 713.5	0.117	20.68	4M54G7D
		16QAM	701.5 - 713.5	0.071	18.53	4M54W7D
	3 MHz	QPSK	700.5 - 714.5	0.110	20.42	2M73G7D
		16QAM	700.5 - 714.5	0.070	18.46	2M71W7D
	1.4 MHz	QPSK	699.7 - 715.3	0.110	20.42	1M11G7D
		16QAM	699.7 - 715.3	0.068	18.33	1M12W7D
LTE Band 13	10 MHz	QPSK	782.0	0.098	19.92	9M04G7D
		16QAM	782.0	0.077	18.84	9M04W7D
	5 MHz	QPSK	779.5 - 784.5	0.098	19.92	4M55G7D
		16QAM	779.5 - 784.5	0.081	19.06	4M55W7D

Overview Table – LTE Antenna 1

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 4 of 318

Antenna-1						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	ERP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n71	35 MHz	$\pi/2$ BPSK	680.5	0.099	19.97	32M5G7D
		QPSK	680.5	0.093	19.67	33M9G7D
		16QAM	680.5	0.075	18.78	33M9W7D
	30 MHz	$\pi/2$ BPSK	678.0 - 683.0	0.102	20.10	28M8G7D
		QPSK	678.0 - 683.0	0.095	19.80	28M8G7D
		16QAM	678.0 - 683.0	0.078	18.90	28M8W7D
	25 MHz	$\pi/2$ BPSK	675.5 - 685.5	0.102	20.08	23M1G7D
		QPSK	675.5 - 685.5	0.093	19.69	23M9G7D
		16QAM	675.5 - 685.5	0.078	18.91	23M9W7D
	20 MHz	$\pi/2$ BPSK	673.0 - 688.0	0.096	19.84	17M9G7D
		QPSK	673.0 - 688.0	0.090	19.56	19M0G7D
		16QAM	673.0 - 688.0	0.074	18.69	19M0W7D
	15 MHz	$\pi/2$ BPSK	670.5 - 690.5	0.098	19.92	13M5G7D
		QPSK	670.5 - 690.5	0.092	19.65	14M2G7D
		16QAM	670.5 - 690.5	0.075	18.76	14M2W7D
	10 MHz	$\pi/2$ BPSK	668.0 - 693.0	0.099	19.94	8M99G7D
		QPSK	668.0 - 693.0	0.093	19.67	9M34G7D
		16QAM	668.0 - 693.0	0.074	18.72	9M34W7D
	5 MHz	$\pi/2$ BPSK	665.5 - 695.5	0.101	20.06	4M51G7D
		QPSK	665.5 - 695.5	0.095	19.77	4M53G7D
		16QAM	665.5 - 695.5	0.077	18.86	4M51W7D
NR Band n12	15 MHz	$\pi/2$ BPSK	706.5 - 708.5	0.097	19.85	13M5G7D
		QPSK	706.5 - 708.5	0.089	19.47	14M2G7D
		16QAM	706.5 - 708.5	0.074	18.69	14M2W7D
	10 MHz	$\pi/2$ BPSK	704.0 - 711.0	0.097	19.85	9M01G7D
		QPSK	704.0 - 711.0	0.088	19.43	9M39G7D
		16QAM	704.0 - 711.0	0.076	18.81	9M36W7D
	5 MHz	$\pi/2$ BPSK	701.5 - 713.5	0.099	19.96	4M56G7D
		QPSK	701.5 - 713.5	0.089	19.48	4M52G7D
		16QAM	701.5 - 713.5	0.076	18.84	4M53W7D

Overview Table – NR Antenna 1

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 5 of 318

Antenna-1						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
WCDMA1700	N/A	Spread Spectrum	1712.4 - 1752.6	0.098	19.90	4M16F9W
LTE Band 66/4	20 MHz	QPSK	1720.0 - 1770.0	0.181	22.58	18M0G7D
		16QAM	1720.0 - 1770.0	0.149	21.74	18M0W7D
	15 MHz	QPSK	1717.5 - 1772.5	0.182	22.60	13M5G7D
		16QAM	1717.5 - 1772.5	0.147	21.67	13M5W7D
	10 MHz	QPSK	1715.0 - 1775.0	0.182	22.61	9M02G7D
		16QAM	1715.0 - 1775.0	0.151	21.78	9M03W7D
	5 MHz	QPSK	1712.5 - 1777.5	0.182	22.60	4M52G7D
		16QAM	1712.5 - 1777.5	0.156	21.94	4M52W7D
	3 MHz	QPSK	1711.5 - 1778.5	0.182	22.59	2M73G7D
		16QAM	1711.5 - 1778.5	0.156	21.94	2M72W7D
	1.4 MHz	QPSK	1710.7 - 1779.3	0.184	22.64	1M11G7D
		16QAM	1710.7 - 1779.3	0.150	21.77	1M11W7D

Overview Table – WCDMA/LTE Antenna 1

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 6 of 318

Antenna-1						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n70	15 MHz	$\pi/2$ BPSK	1702.5	0.140	21.47	13M5G7D
		QPSK	1702.5	0.136	21.32	14M2G7D
		16QAM	1702.5	0.105	20.22	14M2W7D
	10 MHz	$\pi/2$ BPSK	1700.0 - 1705.0	0.138	21.39	9M00G7D
		QPSK	1700.0 - 1705.0	0.135	21.29	9M35G7D
		16QAM	1700.0 - 1705.0	0.105	20.22	9M35W7D
	5 MHz	$\pi/2$ BPSK	1697.5 - 1707.5	0.140	21.45	4M53G7D
		QPSK	1697.5 - 1707.5	0.138	21.40	4M53G7D
		16QAM	1697.5 - 1707.5	0.107	20.28	4M52W7D
NR Band n66	45 MHz	$\pi/2$ BPSK	1732.5 - 1757.5	0.221	23.45	43M2G7D
		QPSK	1732.5 - 1757.5	0.213	23.28	43M6G7D
		16QAM	1732.5 - 1757.5	0.164	22.15	43M6W7D
	40 MHz	$\pi/2$ BPSK	1730.0 - 1760.0	0.232	23.66	38M7G7D
		QPSK	1730.0 - 1760.0	0.209	23.20	38M8G7D
		16QAM	1730.0 - 1760.0	0.161	22.06	38M8W7D
	35 MHz	$\pi/2$ BPSK	1727.5 - 1762.5	0.221	23.44	32M4G7D
		QPSK	1727.5 - 1762.5	0.217	23.37	33M7G7D
		16QAM	1727.5 - 1762.5	0.162	22.09	33M8W7D
	30 MHz	$\pi/2$ BPSK	1725.0 - 1765.0	0.229	23.59	28M7G7D
		QPSK	1725.0 - 1765.0	0.215	23.33	28M7G7D
		16QAM	1725.0 - 1765.0	0.167	22.22	28M8W7D
	25 MHz	$\pi/2$ BPSK	1722.5 - 1767.5	0.228	23.57	23M0W7D
		QPSK	1722.5 - 1767.5	0.211	23.25	23M9W7D
		16QAM	1722.5 - 1767.5	0.169	22.28	23M8W7D
	20 MHz	$\pi/2$ BPSK	1720.0 - 1770.0	0.222	23.47	17M9G7D
		QPSK	1720.0 - 1770.0	0.213	23.28	19M0G7D
		16QAM	1720.0 - 1770.0	0.167	22.23	19M0W7D
	15 MHz	$\pi/2$ BPSK	1717.5 - 1772.5	0.214	23.31	13M5G7D
		QPSK	1717.5 - 1772.5	0.208	23.19	14M2G7D
		16QAM	1717.5 - 1772.5	0.167	22.24	14M2W7D
	10 MHz	$\pi/2$ BPSK	1715.0 - 1775.0	0.216	23.35	9M00G7D
		QPSK	1715.0 - 1775.0	0.206	23.13	9M36G7D
		16QAM	1715.0 - 1775.0	0.164	22.15	9M34W7D
	5 MHz	$\pi/2$ BPSK	1712.5 - 1777.5	0.214	23.31	4M53G7D
		QPSK	1712.5 - 1777.5	0.213	23.29	4M52G7D
		16QAM	1712.5 - 1777.5	0.164	22.16	4M51W7D

Overview Table – NR Antenna 1

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 7 of 318

Antenna-2						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	ERP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
LTE Band 71	20 MHz	QPSK	673.0 - 688.0	0.049	16.93	18M1G7D
		16QAM	673.0 - 688.0	0.042	16.20	18M0W7D
	15 MHz	QPSK	670.5 - 690.5	0.049	16.88	13M6G7D
		16QAM	670.5 - 690.5	0.043	16.31	13M5W7D
	10 MHz	QPSK	668.0 - 693.0	0.048	16.80	9M03G7D
		16QAM	668.0 - 693.0	0.043	16.29	9M05W7D
	5 MHz	QPSK	665.5 - 695.5	0.047	16.70	4M53G7D
		16QAM	665.5 - 695.5	0.045	16.52	4M53W7D
LTE Band 12	10 MHz	QPSK	704.0 - 711.0	0.059	17.74	8M98G7D
		16QAM	704.0 - 711.0	0.049	16.93	9M00W7D
	5 MHz	QPSK	701.5 - 713.5	0.060	17.81	4M53G7D
		16QAM	701.5 - 713.5	0.053	17.24	4M50W7D
	3 MHz	QPSK	700.5 - 714.5	0.060	17.82	2M71G7D
		16QAM	700.5 - 714.5	0.050	17.02	2M71W7D
	1.4 MHz	QPSK	699.7 - 715.3	0.052	17.14	1M11G7D
		16QAM	699.7 - 715.3	0.042	16.20	1M11W7D
LTE Band 13	10 MHz	QPSK	782.0	0.050	17.01	9M04G7D
		16QAM	782.0	0.041	16.14	9M05W7D
	5 MHz	QPSK	779.5 - 784.5	0.050	16.96	4M52G7D
		16QAM	779.5 - 784.5	0.039	15.96	4M52W7D

Overview Table – LTE Antenna 2

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 8 of 318

Antenna-2						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	ERP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n71	35 MHz	$\pi/2$ BPSK	680.5	0.056	17.47	32M5G7D
		QPSK	680.5	0.057	17.59	33M8G7D
		16QAM	680.5	0.042	16.21	33M9W7D
	30 MHz	$\pi/2$ BPSK	678.0 - 683.0	0.059	17.73	28M7G7D
		QPSK	678.0 - 683.0	0.059	17.73	28M8G7D
		16QAM	678.0 - 683.0	0.041	16.16	28M7W7D
	25 MHz	$\pi/2$ BPSK	675.5 - 685.5	0.059	17.74	23M0G7D
		QPSK	675.5 - 685.5	0.059	17.74	23M9G7D
		16QAM	675.5 - 685.5	0.042	16.21	23M9W7D
	20 MHz	$\pi/2$ BPSK	673.0 - 688.0	0.055	17.42	17M9G7D
		QPSK	673.0 - 688.0	0.057	17.56	19M0G7D
		16QAM	673.0 - 688.0	0.039	15.89	19M1W7D
	15 MHz	$\pi/2$ BPSK	670.5 - 690.5	0.056	17.48	13M5G7D
		QPSK	670.5 - 690.5	0.056	17.51	14M2G7D
		16QAM	670.5 - 690.5	0.040	15.98	14M2W7D
	10 MHz	$\pi/2$ BPSK	668.0 - 693.0	0.055	17.40	9M00G7D
		QPSK	668.0 - 693.0	0.056	17.49	9M35G7D
		16QAM	668.0 - 693.0	0.038	15.79	9M35W7D
	5 MHz	$\pi/2$ BPSK	665.5 - 695.5	0.057	17.55	4M51G7D
		QPSK	665.5 - 695.5	0.058	17.67	4M52G7D
		16QAM	665.5 - 695.5	0.038	15.84	4M51W7D
NR Band n12	15 MHz	$\pi/2$ BPSK	706.5 - 708.5	0.050	16.96	13M5G7D
		QPSK	706.5 - 708.5	0.051	17.08	14M2G7D
		16QAM	706.5 - 708.5	0.038	15.75	14M2W7D
	10 MHz	$\pi/2$ BPSK	704.0 - 711.0	0.049	16.94	8M98G7D
		QPSK	704.0 - 711.0	0.051	17.06	9M36G7D
		16QAM	704.0 - 711.0	0.038	15.80	9M33W7D
	5 MHz	$\pi/2$ BPSK	701.5 - 713.5	0.051	17.07	4M53G7D
		QPSK	701.5 - 713.5	0.052	17.13	4M54G7D
		16QAM	701.5 - 713.5	0.040	15.99	4M52W7D

Overview Table – NR Antenna 2

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 9 of 318

Antenna-2						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
LTE Band 66/4	20 MHz	QPSK	1720.0 - 1770.0	0.060	17.81	18M0G7D
		16QAM	1720.0 - 1770.0	0.047	16.68	18M0W7D
	15 MHz	QPSK	1717.5 - 1772.5	0.061	17.86	13M5G7D
		16QAM	1717.5 - 1772.5	0.046	16.61	13M5W7D
	10 MHz	QPSK	1715.0 - 1775.0	0.061	17.88	9M04G7D
		16QAM	1715.0 - 1775.0	0.047	16.72	9M00W7D
	5 MHz	QPSK	1712.5 - 1777.5	0.061	17.84	4M53G7D
		16QAM	1712.5 - 1777.5	0.049	16.88	4M54W7D
	3 MHz	QPSK	1711.5 - 1778.5	0.060	17.81	2M71G7D
		16QAM	1711.5 - 1778.5	0.049	16.88	2M72W7D
	1.4 MHz	QPSK	1710.7 - 1779.3	0.060	17.78	1M10G7D
		16QAM	1710.7 - 1779.3	0.047	16.71	1M11W7D

Overview Table – LTE Antenna 2

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 10 of 318

Antenna-2						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n70	15 MHz	$\pi/2$ BPSK	1702.5	0.105	20.21	13M5G7D
		QPSK	1702.5	0.109	20.39	14M2G7D
		16QAM	1702.5	0.086	19.34	14M2W7D
	10 MHz	$\pi/2$ BPSK	1700.0 - 1705.0	0.110	20.42	9M01G7D
		QPSK	1700.0 - 1705.0	0.114	20.59	9M36G7D
		16QAM	1700.0 - 1705.0	0.083	19.21	9M36W7D
	5 MHz	$\pi/2$ BPSK	1697.5 - 1707.5	0.103	20.14	4M53G7D
		QPSK	1697.5 - 1707.5	0.110	20.43	4M53G7D
		16QAM	1697.5 - 1707.5	0.093	19.71	4M52W7D
NR Band n66	45 MHz	$\pi/2$ BPSK	1732.5 - 1757.5	0.089	19.50	43M2G7D
		QPSK	1732.5 - 1757.5	0.088	19.44	43M6G7D
		16QAM	1732.5 - 1757.5	0.072	18.55	43M7W7D
	40 MHz	$\pi/2$ BPSK	1730.0 - 1760.0	0.087	19.41	38M7G7D
		QPSK	1730.0 - 1760.0	0.086	19.35	38M8G7D
		16QAM	1730.0 - 1760.0	0.070	18.47	38M9W7D
	35 MHz	$\pi/2$ BPSK	1727.5 - 1762.5	0.090	19.55	32M4G7D
		QPSK	1727.5 - 1762.5	0.092	19.64	33M8G7D
		16QAM	1727.5 - 1762.5	0.072	18.58	33M9W7D
	30 MHz	$\pi/2$ BPSK	1725.0 - 1765.0	0.091	19.61	28M8G7D
		QPSK	1725.0 - 1765.0	0.085	19.31	28M7G7D
		16QAM	1725.0 - 1765.0	0.073	18.61	28M7W7D
	25 MHz	$\pi/2$ BPSK	1722.5 - 1767.5	0.088	19.43	23M0W7D
		QPSK	1722.5 - 1767.5	0.089	19.47	23M9W7D
		16QAM	1722.5 - 1767.5	0.071	18.54	23M9W7D
	20 MHz	$\pi/2$ BPSK	1720.0 - 1770.0	0.088	19.44	17M9G7D
		QPSK	1720.0 - 1770.0	0.086	19.35	19M0G7D
		16QAM	1720.0 - 1770.0	0.069	18.40	19M0W7D
	15 MHz	$\pi/2$ BPSK	1717.5 - 1772.5	0.089	19.49	13M5G7D
		QPSK	1717.5 - 1772.5	0.089	19.47	14M2G7D
		16QAM	1717.5 - 1772.5	0.069	18.38	14M2W7D
	10 MHz	$\pi/2$ BPSK	1715.0 - 1775.0	0.086	19.36	9M01G7D
		QPSK	1715.0 - 1775.0	0.086	19.36	9M36G7D
		16QAM	1715.0 - 1775.0	0.068	18.34	9M35W7D
	5 MHz	$\pi/2$ BPSK	1712.5 - 1777.5	0.088	19.42	4M52G7D
		QPSK	1712.5 - 1777.5	0.088	19.42	4M53G7D
		16QAM	1712.5 - 1777.5	0.069	18.36	4M51W7D

Overview Table – NR Antenna 2

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 11 of 318

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

Measurements were conducted at the Element laboratory(ies) indicated in Section 1.3 below. All measurement facilities are compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 12 of 318

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMF776U** and **IC: 649E-SMF776W**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27, RSS-130 & RSS-139.

Test Device Serial No.: 0139M, 0130M, 0128M, 0358M, 0359M, 0775M, 0671M, 0794M, 0791M, 0347M, 0349M, 0339M, 0354M, 0351M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1), 802.11b/g/n/ac/ax/be WLAN, 802.11a/n/ac/ax/be UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer, NTN, SCS

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports three folder configurations: one is with folder fully open, one is where the folder is half open (90 degrees), and one is with folder closed. All configurations are tested, and the worst case radiated emissions data is shown in this report.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N2400 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

Band	Ant1	Ant2
WCDMA1700	Ant B	-
LTE Band 66/4	Ant B	Ant H
LTE Band B71, B12, B13	Ant A	Ant E
NR Band n70, n66	Ant B	Ant H
NR Band n71, n12	Ant A	Ant E

Table 2-1. Antenna Naming Convention

2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version F776USQU0AZC9 installed on the EUT.

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 13 of 318

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 14 of 318

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

Table 4-1. Measurement Uncertainty Budget

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 15 of 318

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP1-002	EMC Cable and Switch System	2/3/2026	Annual	2/3/2027	AP1-002
-	ETS-001	EMC Cable and Switch System	1/29/2026	Annual	1/29/2027	ETS-001
-	ETS-002	EMC Cable and Switch System	1/29/2026	Annual	1/29/2027	ETS-002
-	MVG-001	EMC Cable and Switch System	2/2/2026	Annual	2/2/2027	MVG-001
-	MVG-002	EMC Cable and Switch System	2/2/2026	Annual	2/2/2027	MVG-002
-	LTx1	Licensed Transmitter Cable Set	1/30/2026	Annual	1/30/2027	LTx1
-	LTx2	Licensed Transmitter Cable Set	1/30/2026	Annual	1/30/2027	LTx2
-	LTx6-40	Licensed Transmitter Cable Set	1/30/2026	Annual	1/30/2027	LTx6-40
Anritsu	MT8000A	Radio Communication Test Station	6/4/2025	Annual	6/4/2026	6261914237
Anritsu	MT8000A	Radio Communication Test Station	10/17/2025	Annual	10/17/2026	6272337405
Anritsu	MT8821C	Radio Communication Analyze	9/15/2025	Annual	9/15/2026	6201381794
Anritsu	MT8821C	Radio Communication Analyze	3/11/2026	Annual	3/11/2027	6262044715
EMCO	3115	Horn Antenna (1-18GHz)	9/6/2024	Biennial	9/6/2026	9704-5182
Espec	ESX-2CA	Environmental Chamber	11/20/2024	Biennial	11/20/2026	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	6/4/2025	Biennial	6/4/2027	125518
ETS-Lindgren	3116C	DRG Horn Antenna	4/22/2025	Biennial	4/22/2027	218893
Keysight Technologies	N9020A	MXA Signal Analyzer (NM)	6/4/2025	Annual	6/4/2026	MY54500644
Keysight Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	9/15/2025	Annual	9/15/2026	MY49430494
Keysight Technologies	N9020A	MXA Signal Analyzer	5/7/2025	Annual	5/7/2026	US46470561
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	6/6/2025	Annual	6/6/2026	MY52350166
Keysight Technologies	N9030A	PXA Signal Analyzer	6/16/2025	Annual	6/16/2026	MY55410501
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	1/16/2026	Annual	1/16/2027	100348
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	3/11/2026	Annual	3/11/2027	101716
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	6/18/2025	Annual	6/18/2026	140148
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	9/11/2024	Biennial	9/11/2026	A051107
Sunol	JB6	Bi-Log Antenna (30M - 5GHz)	3/24/2025	Biennial	3/24/2027	A082816

Table 5-1. Test Equipment Calibration Table

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 16 of 318

Component	Serial Number
Sucoflex 106A Cable	501992
MegaPhase Cable N29-N1N1-324	20335606 001
Rohde & Schwarz SF Unit	102133
MiniCircuits Cable CBL-2FT-SMSM+	77745
MegaPhase Cable 10511-1	15034701 001
MiniCircuits Switch RC 2SPDT-A18	11703270 041
Sucoflex 104 Cable	320259/4
Sucoflex 104 Cable	321999/4
Sucoflex 104 Cable	321995/4

Table 5-2. AP1 EMC Cable and Switch System Components

Component	Serial Number
Pasternack Cable RG214/U	111815
MegaPhase (CAGE 1GVT4) Cable GR18-N5N5-24	14042714 001

Table 5-3. ETS-001 EMC Cable and Switch System Components

Component	Serial Number
MegaPhase (CAGE 1GVT4) Cable GR18-N5N5-24	14042714 001
MegaPhase (CAGE 1GVT4) Cable NC29-N1N1-324	20502201 001
Rohde & Schwarz SF Unit	102134
Minicircuits Cable CBL=0.5M-NMNM+	15440

Table 5-4. ETS-002 EMC Cable and Switch System Components

Component	Serial Number
MegaPhase (CAGE 1GVT4) Cable NC29-N1N1-324	20379901 001
Sucoflex Cable 126E	S/N:551792
Rohde & Schwarz SF Unit	102155
SMU/RF-A OUT cable	1127118600 10 06 379

Table 5-5. MVG-001 EMC Cable and Switch System Components

Component	Serial Number
MiniCircuits Cable CBL-0.5M-SMNM+	47261
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-001
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-002
MegaPhase (CAGE 1GVT4) Cable NC29-N1N1-324	19046401 001
Megaphase (CAGE 1GVT4) Flex Cable 10511-1	15044701-006
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-002
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-004
Micro-Coax Utilflex Cable UFB142A-0-0629-5GU200 MFR 64639	232069-001
Rohde & Schwarz SF Unit	102138
Rohde & Schwarz OSP130 Open Switch and Control Unit	101181
Micro-Coax Utilflex Cable UFB311A-Q-3346-50U50U MFR 64639	231978-003
Micro-Coax Utilflex Cable UFB311A-1-0629-50U50U MFR 64639	231986-003
Rohde & Schwarz TS-PR8 Pre-Amplifier	102335

Table 5-6. MVG-002 EMC Cable and Switch System Components

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 17 of 318

Component	Serial Number
Keysight Directional Coupler, Model: 87300C	55300398
Mini Circuits 6dB Attenuator, BW S6 2W263+	2105
MegaPhase Cable, Model: TM26-S1S1-30	20233001 004

Table 5-7. LTx1 Licensed Transmitter Cable Set

Component	Serial Number
Keysight Directional Coupler, Model: 87300C	55300391
Mini Circuits 6dB Attenuator, Model: BW S6 2W263+	1845
MegaPhase Cable, Model: TM26-S1S1-30	20233001 006

Table 5-8. LTx2 Licensed Transmitter Cable Set

Component	Serial Number
Fairview Microwave Directional Coupler, FM2CP1122-10	2122
MCL 6dB Attenuator, Model: BW-K6 2W44+	2013
MegaPhase Cable, Model: TM40-K1K1-30	20233002 003

Table 5-9. LTx6-40 Licensed Transmitter Cable Set

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 18 of 318

6.0 SAMPLE EMISSION DESIGNATORS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 19 of 318

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMF776U
 IC: 649E-SMF776W
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): WCDMA/LTE/NR

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Transmitter Conducted Output Power *	2.1046(a), 2.1046(c)	N/A	PASS	Section 7.2
	Occupied Bandwidth	2.1049(h)	N/A	PASS	Section 7.3
	Conducted Band Edge / Spurious Emissions (LTE Band 13)	2.1051, 27.53(c), 27.53(f)	Undesirable emissions must meet the limits detailed in sections 27.53(c) and 27.53(f)	PASS	Sections 7.4, 7.5
	Conducted Band Edge / Spurious Emissions (LTE Band 12, 17, 71; NR Band n12, n71)	2.1051, 27.53(g)	$\geq 43 + 10 \log (P[\text{Watts}])$ dB of attenuation below transmitter power	PASS	Sections 7.4, 7.5
	Conducted Band Edge / Spurious Emissions (WCDMA AWS; LTE Band 4, 66; NR Band n70, n66)	2.1051, 27.53(h)	$\geq 43 + 10 \log (P[\text{Watts}])$ dB of attenuation below transmitter power	PASS	Sections 7.4, 7.5
	Peak-to-Average Ratio (WCDMA AWS; LTE Band 4, 66; NR Band n70, n66)	27.50(d)(5)	≤ 13 dB	PASS	Section 7.6
	Frequency Stability	2.1055, 27.54	Fundamental emissions stay within authorized frequency block	PASS	Section 7.9
RADIATED	Effective Radiated Power (LTE Band 13)	27.50(b)(10)	≤ 3 Watts max. ERP	PASS	Section 7.7
	Effective Radiated Power (LTE Band 12, 17, 71; NR Band n12, n71)	27.50(c)(10)	≤ 3 Watts max. ERP	PASS	Section 7.7
	Equivalent Isotropic Radiated Power (WCDMA AWS; LTE Band 4, 66; NR Band n70, n66)	27.50(d)(4)	≤ 1 Watt max. EIRP	PASS	Section 7.7
	Radiated Spurious Emissions (LTE Band 13)	2.1053, 27.53(c), 27.53(f)	Undesirable emissions must meet the limits detailed in sections 27.53(c) and 27.53(f)	PASS	Section 7.8
	Radiated Spurious Emissions (LTE Band 12, 17, 71; NR Band n12, n71)	2.1053, 27.53(g)	$\geq 43 + 10 \log (P[\text{Watts}])$ dB of attenuation below transmitter power	PASS	Section 7.8
	Radiated Spurious Emissions (WCDMA AWS; LTE Band 4, 66; NR Band n70, n66)	2.1053, 27.53(h)(1)	$\geq 43 + 10 \log (P[\text{Watts}])$ dB of attenuation below transmitter power	PASS	Section 7.8

* The only transmitter output conducted powers included in this report are those where the Pmax value, per the tune-up document, is higher than any of the DSI power levels. For the remaining conducted power measurements, see the **RF Exposure Report**.

Table 7-1. Summary of Test Results - FCC

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 20 of 318

Test Condition	Test Description	RSS Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Transmitter Conducted Output Power *	RSS-Gen(6.12)	N/A	PASS	Section 7.2
	Occupied Bandwidth	RSS-Gen(6.7)	N/A	PASS	Section 7.3
	Conducted Band Edge / Spurious Emissions (LTE Band 13)	RSS-Gen(6.13), RSS-130(4.7)	Undesirable emissions must meet the limits detailed in RSS-130(4.7)	PASS	Sections 7.4, 7.5
	Conducted Band Edge / Spurious Emissions (LTE Band 12, 17, 71; NR Band n12, n71)	RSS-Gen(6.13), RSS-130(4.7)	$\geq 43 + 10 \log (P[\text{Watts}])$ dB of attenuation below transmitter power	PASS	Sections 7.4, 7.5
	Conducted Band Edge / Spurious Emissions (WCDMA AWS; LTE Band 4, 66; NR Band n66)	RSS-Gen(6.13), RSS-139(5.6)	$\geq 43 + 10 \log (P[\text{Watts}])$ dB of attenuation below transmitter power	PASS	Sections 7.4, 7.5
	Peak-to-Average Ratio (LTE Band 12, 13, 17, 71; NR Band n12, n71)	RSS-130(4.6.1)	≤ 13 dB	PASS	Section 7.6
	Peak-to-Average Ratio (WCDMA AWS; LTE Band 4, 66; NR Band n66)	RSS-139(5.5)	≤ 13 dB	PASS	Section 7.6
	Frequency Stability (LTE Band 12, 13, 17, 71; NR Band n12, n71)	RSS-Gen(6.11), RSS-130(4.5)	Occupied bandwidth stays within the operating frequency block range	PASS	Section 7.9
	Frequency Stability (WCDMA AWS; LTE Band 4, 66; NR Band n66)	RSS-Gen(6.11), RSS-139(5.4)	Occupied bandwidth stays within the operating frequency block range	PASS	Section 7.9
RADIATED	Effective Radiated Power (LTE Band 12, 13, 17, 71; NR Band n12, n71)	RSS-Gen(6.12), RSS-130(4.6)	≤ 3 Watts max. ERP	PASS	Section 7.7
	Equivalent Isotropic Radiated Power (WCDMA AWS; LTE Band 4, 66; NR Band n66)	RSS-Gen(6.12), RSS-139(5.5)	≤ 1 Watt max. EIRP	PASS	Section 7.7
	Radiated Spurious Emissions (LTE Band 13)	RSS-Gen(6.13), RSS-130(4.7)	Undesirable emissions must meet the limits detailed in RSS-130(4.7)	PASS	Section 7.8
	Radiated Spurious Emissions (LTE Band 12, 17, 71; NR Band n12, n71)	RSS-Gen(6.13), RSS-130(4.7)	$\geq 43 + 10 \log (P[\text{Watts}])$ dB of attenuation below transmitter power	PASS	Section 7.8
	Radiated Spurious Emissions (WCDMA AWS; LTE Band 4, 66; NR Band n66)	RSS-Gen(6.13), RSS-139(5.6)	$\geq 43 + 10 \log (P[\text{Watts}])$ dB of attenuation below transmitter power	PASS	Section 7.8

* The only transmitter output conducted powers included in this report are those where the Pmax value, per the tune-up document, is higher than any of the DSI power levels. For the remaining conducted power measurements, see the **RF Exposure Report**.

Table 7-2. Summary of Test Results - ISED

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 21 of 318

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v2.3.0 .

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 22 of 318

7.2 Conducted Output Power Data

Test Overview

All emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.2

Test Settings

1. Detector = RMS
2. Trace mode = trace average for continuous emissions, max hold for pulse emissions
3. Sweep time = auto couple
4. The trace was allowed to stabilize
5. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. Conducted power measurements were evaluated using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.
2. All other conducted power measurements are contained in the RF exposure report for this filing.
3. Conducted power was found to reduce for the higher order QAM modulations when compared to 16QAM. Due to this trend, only the worst-case QAM (16QAM) powers are included in this section.

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 23 of 318

Mode	AWS Band [dBm]		
	1312	1412	1513
WCDMA	23.48	23.61	23.68

Table 7-3. Max Conducted Power Test Results – WCDMA AWS – Ant1

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	133222	673.0	1 / 0	24.69
		133297	680.5	1 / 0	24.52
		133372	688.0	1 / 0	24.56
	16-QAM	133222	673.0	1 / 0	23.90
		133297	680.5	1 / 99	23.83
		133372	688.0	1 / 50	23.86
15 MHz	QPSK	133197	670.5	1 / 37	24.66
		133297	680.5	1 / 37	24.63
		133397	690.5	1 / 0	24.45
	16-QAM	133197	670.5	1 / 74	23.84
		133297	680.5	1 / 37	24.07
		133397	690.5	1 / 37	23.98
10 MHz	QPSK	133172	668.0	1 / 0	24.54
		133297	680.5	1 / 25	24.55
		133422	693.0	1 / 25	24.40
	16-QAM	133172	668.0	1 / 25	23.87
		133297	680.5	1 / 25	23.90
		133422	693.0	1 / 49	23.96
5 MHz	QPSK	133147	665.5	1 / 0	24.65
		133297	680.5	1 / 12	24.29
		133447	695.5	1 / 0	24.33
	16-QAM	133147	665.5	1 / 12	24.21
		133297	680.5	1 / 24	24.00
		133447	695.5	1 / 24	24.19

Table 7-4. Max Conducted Power Test Results - LTE B71 - Ant2

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 24 of 318

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
10 MHz	QPSK	23060	704.0	1 / 49	24.29
		23095	707.5	1 / 25	24.12
		23130	711.0	1 / 0	24.25
	16-QAM	23060	704.0	1 / 0	23.30
		23095	707.5	1 / 49	23.35
		23130	711.0	1 / 0	23.22
5 MHz	QPSK	23035	701.5	1 / 12	24.36
		23095	707.5	1 / 0	24.17
		23155	713.5	1 / 0	24.45
	16-QAM	23035	701.5	1 / 24	23.61
		23095	707.5	1 / 24	23.59
		23155	713.5	1 / 0	23.60
3 MHz	QPSK	23025	700.5	1 / 7	24.37
		23095	707.5	1 / 7	24.20
		23165	714.5	1 / 7	24.32
	16-QAM	23025	700.5	1 / 14	23.39
		23095	707.5	1 / 7	23.67
		23165	714.5	1 / 0	23.40
1.4 MHz	QPSK	23017	699.7	1 / 3	24.31
		23095	707.5	1 / 3	24.05
		23173	715.3	1 / 5	24.33
	16-QAM	23017	699.7	1 / 0	23.51
		23095	707.5	1 / 5	23.55
		23173	715.3	1 / 5	23.31

Table 7-5. Max Conducted Power Test Results - LTE B12 - Ant2

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
10 MHz	QPSK	23230	782.0	1 / 0	24.38
	16-QAM	23230	782.0	1 / 25	23.79
5 MHz	QPSK	23205	779.5	1 / 0	24.22
		23230	782.0	1 / 0	24.33
		23255	784.5	1 / 0	24.27
	16-QAM	23205	779.5	1 / 0	23.57
		23230	782.0	1 / 0	23.61
		23255	784.5	1 / 0	23.56

Table 7-6. Max Conducted Power Test Results - LTE B13 - Ant2

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 25 of 318

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	132072	1720.0	1 / 50	25.42
		132322	1745.0	1 / 0	25.46
		132572	1770.0	1 / 0	25.44
	16-QAM	132072	1720.0	1 / 99	24.80
		132322	1745.0	1 / 50	24.74
		132572	1770.0	1 / 99	24.54
15 MHz	QPSK	132047	1717.5	1 / 0	25.47
		132322	1745.0	1 / 37	25.45
		132597	1772.5	1 / 37	25.34
	16-QAM	132047	1717.5	1 / 74	24.91
		132322	1745.0	1 / 74	24.67
		132597	1772.5	1 / 0	24.54
10 MHz	QPSK	132022	1715.0	1 / 49	25.49
		132322	1745.0	1 / 0	25.40
		132622	1775.0	1 / 0	25.28
	16-QAM	132022	1715.0	1 / 0	24.70
		132322	1745.0	1 / 25	24.78
		132622	1775.0	1 / 0	24.44
5 MHz	QPSK	131997	1712.5	1 / 24	25.45
		132322	1745.0	1 / 24	25.48
		132647	1777.5	1 / 0	25.37
	16-QAM	131997	1712.5	1 / 24	25.02
		132322	1745.0	1 / 12	24.94
		132647	1777.5	1 / 0	24.69
3 MHz	QPSK	131987	1711.5	1 / 7	25.42
		132322	1745.0	1 / 7	25.47
		132657	1778.5	1 / 7	25.14
	16-QAM	131987	1711.5	1 / 7	24.87
		132322	1745.0	1 / 7	24.94
		132657	1778.5	1 / 7	24.69
1.4 MHz	QPSK	131979	1710.7	1 / 0	25.39
		132322	1745.0	1 / 5	25.40
		132665	1779.3	1 / 5	25.31
	16-QAM	131979	1710.7	1 / 5	24.79
		132322	1745.0	1 / 0	24.77
		132665	1779.3	1 / 0	24.51

Table 7-7. Max Conducted Power Test Results - LTE B66/4 - Ant2

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 26 of 318

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
35 MHz	$\pi/2$ BPSK	136100	680.5	1 / 1	24.23
	QPSK	136100	680.5	1 / 1	24.22
	16-QAM	136100	680.5	1 / 104	23.30
30 MHz	$\pi/2$ BPSK	135600	678.0	1 / 1	24.49
		136100	680.5	1 / 1	24.28
		136600	683.0	1 / 1	24.21
	QPSK	135600	678.0	1 / 1	24.34
		136100	680.5	1 / 1	24.33
		136600	683.0	1 / 1	24.36
	16-QAM	135600	678.0	1 / 1	22.94
		136100	680.5	1 / 1	23.25
		136600	683.0	1 / 1	23.23
25 MHz	$\pi/2$ BPSK	135100	675.5	1 / 1	24.37
		136100	680.5	1 / 1	24.50
		137100	685.5	1 / 1	24.12
	QPSK	133600	668.0	1 / 1	24.35
		136100	680.5	1 / 1	24.37
		138600	693.0	1 / 1	24.17
	16-QAM	133600	668.0	1 / 1	22.99
		136100	680.5	1 / 1	23.30
		138600	693.0	1 / 1	22.83
20 MHz	$\pi/2$ BPSK	134600	673.0	1 / 1	24.18
		136100	680.5	1 / 1	24.15
		137600	688.0	1 / 1	24.09
	QPSK	134600	673.0	1 / 1	24.12
		136100	680.5	1 / 1	24.19
		137600	688.0	1 / 1	24.11
	16-QAM	134600	673.0	1 / 1	22.85
		136100	680.5	1 / 1	22.98
		137600	688.0	1 / 1	22.82
15 MHz	$\pi/2$ BPSK	134100	670.5	1 / 1	24.24
		136100	680.5	1 / 1	24.05
		138100	690.5	1 / 1	24.11
	QPSK	134100	670.5	1 / 1	24.14
		136100	680.5	1 / 1	24.09
		138100	690.5	1 / 1	24.12
	16-QAM	134100	670.5	1 / 1	22.97
		136100	680.5	1 / 1	22.77
		138100	690.5	1 / 1	23.07
10 MHz	$\pi/2$ BPSK	133600	668.0	1 / 1	24.16
		136100	680.5	1 / 1	23.85
		138600	693.0	1 / 1	24.02
	QPSK	133600	668.0	1 / 1	24.12
		136100	680.5	1 / 1	23.77
		138600	693.0	1 / 1	23.99
	16-QAM	133600	668.0	1 / 1	22.88
		136100	680.5	1 / 1	22.51
		138600	693.0	1 / 1	22.77
5 MHz	$\pi/2$ BPSK	133100	665.5	1 / 1	24.29
		136100	680.5	1 / 1	24.19
		139100	695.5	1 / 1	24.31
	QPSK	133100	665.5	1 / 1	24.29
		136100	680.5	1 / 1	24.24
		139100	695.5	1 / 1	24.30
	16-QAM	133100	665.5	1 / 1	22.87
		136100	680.5	1 / 1	22.91
		139100	695.5	1 / 1	22.93

Table 7-8. Max Conducted Power Test Results - NR n71 - Ant2

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 27 of 318

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
15 MHz	$\pi/2$ BPSK	141300	706.5	1 / 1	24.66
		141500	707.5	1 / 1	24.80
		141700	708.5	1 / 1	24.80
	QPSK	141300	706.5	1 / 77	24.68
		141500	707.5	1 / 77	24.70
		141700	708.5	1 / 1	24.69
	16-QAM	141300	706.5	1 / 1	23.56
		141500	707.5	1 / 77	23.62
		141700	708.5	1 / 1	23.59
10 MHz	$\pi/2$ BPSK	140800	704.0	1 / 26	24.74
		141500	707.5	1 / 1	24.70
		142200	711.0	1 / 50	24.78
	QPSK	140800	704.0	1 / 1	24.75
		141500	707.5	1 / 1	24.68
		142200	711.0	1 / 50	24.68
	16-QAM	140800	704.0	1 / 1	23.62
		141500	707.5	1 / 26	23.67
		142200	711.0	1 / 1	23.64
5 MHz	$\pi/2$ BPSK	140300	701.5	1 / 23	24.87
		141500	707.5	1 / 12	24.63
		142700	713.5	1 / 23	24.67
	QPSK	140300	701.5	1 / 12	24.84
		141500	707.5	1 / 1	24.75
		142700	713.5	1 / 1	24.61
	16-QAM	140300	701.5	1 / 1	23.85
		141500	707.5	1 / 23	23.69
		142700	713.5	1 / 12	23.60

Table 7-9. Max Conducted Power Test Results - NR n12 - Ant2

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
15 MHz	$\pi/2$ BPSK	340500	1702.5	1 / 1	24.90
	QPSK	340500	1702.5	1 / 77	24.85
	16-QAM	340500	1702.5	1 / 1	24.11
10 MHz	$\pi/2$ BPSK	340000	1700.0	1 / 26	25.01
		340500	1702.5	1 / 1	25.11
		341000	1705.0	1 / 1	24.91
	QPSK	340000	1700.0	1 / 26	25.01
		340500	1702.5	1 / 1	25.05
		341000	1705.0	1 / 1	25.05
	16-QAM	340000	1700.0	1 / 1	23.98
		340500	1702.5	1 / 1	23.91
		341000	1705.0	1 / 1	23.85
5 MHz	$\pi/2$ BPSK	339500	1697.5	1 / 1	24.83
		340500	1702.5	1 / 1	24.66
		341500	1707.5	1 / 1	24.75
	QPSK	339500	1697.5	1 / 1	24.89
		340500	1702.5	1 / 1	24.79
		341500	1707.5	1 / 1	24.84
	16-QAM	339500	1697.5	1 / 23	24.48
		340500	1702.5	1 / 23	23.58
		341500	1707.5	1 / 23	24.03

Table 7-10. Max Conducted Power Test Results - NR n70 - Ant2

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 28 of 318

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
45 MHz	π/2 BPSK	346500	1732.5	1 / 240	25.17
		349000	1745.0	1 / 121	25.02
		351500	1757.5	1 / 240	25.34
	QPSK	346500	1732.5	1 / 121	25.15
		349000	1745.0	1 / 121	25.30
		351500	1757.5	1 / 1	25.21
	16-QAM	346500	1732.5	1 / 240	24.08
		349000	1745.0	1 / 240	23.80
		351500	1757.5	1 / 1	24.20
40 MHz	π/2 BPSK	346000	1730.0	1 / 214	25.08
		349000	1745.0	1 / 108	25.01
		352000	1760.0	1 / 1	25.31
	QPSK	346000	1730.0	1 / 108	25.06
		349000	1745.0	1 / 108	25.15
		352000	1760.0	1 / 1	25.13
	16-QAM	346000	1730.0	1 / 108	24.00
		349000	1745.0	1 / 108	23.90
		352000	1760.0	1 / 108	24.20
35 MHz	π/2 BPSK	346000	1727.5	1 / 186	25.22
		349000	1745.0	1 / 94	24.95
		352000	1762.5	1 / 1	25.30
	QPSK	346000	1727.5	1 / 94	25.35
		349000	1745.0	1 / 94	25.36
		352000	1762.5	1 / 1	25.13
	16-QAM	346000	1727.5	1 / 186	24.11
		349000	1745.0	1 / 186	23.85
		352000	1762.5	1 / 186	24.11
30 MHz	π/2 BPSK	345000	1725.0	1 / 158	25.28
		349000	1745.0	1 / 80	25.02
		353000	1765.0	1 / 158	25.40
	QPSK	345000	1725.0	1 / 80	25.02
		349000	1745.0	1 / 80	25.38
		353000	1765.0	1 / 1	25.26
	16-QAM	345000	1725.0	1 / 158	24.14
		349000	1745.0	1 / 1	23.90
		353000	1765.0	1 / 1	24.27
25 MHz	π/2 BPSK	344500	1722.5	1 / 66	25.10
		349000	1745.0	1 / 66	25.08
		353500	1767.5	1 / 1	25.40
	QPSK	344500	1722.5	1 / 66	25.18
		349000	1745.0	1 / 66	25.32
		353500	1767.5	1 / 1	25.31
	16-QAM	344500	1722.5	1 / 131	24.07
		349000	1745.0	1 / 131	23.79
		353500	1767.5	1 / 1	24.31
20 MHz	π/2 BPSK	344000	1720.0	1 / 53	25.11
		349000	1745.0	1 / 53	25.07
		354000	1770.0	1 / 1	25.32
	QPSK	344000	1720.0	1 / 53	25.06
		349000	1745.0	1 / 53	25.19
		354000	1770.0	1 / 1	25.18
	16-QAM	344000	1720.0	1 / 53	23.93
		349000	1745.0	1 / 104	23.83
		354000	1770.0	1 / 53	24.10
15 MHz	π/2 BPSK	343500	1717.5	1 / 39	25.16
		349000	1745.0	1 / 39	24.92
		354500	1772.5	1 / 1	25.28
	QPSK	343500	1717.5	1 / 39	25.18
		349000	1745.0	1 / 39	25.19
		354500	1772.5	1 / 1	25.19
	16-QAM	343500	1717.5	1 / 39	23.91
		349000	1745.0	1 / 1	23.83
		354500	1772.5	1 / 1	24.10
10 MHz	π/2 BPSK	343000	1715.0	1 / 26	25.03
		349000	1745.0	1 / 26	24.95
		355000	1775.0	1 / 1	25.15
	QPSK	343000	1715.0	1 / 26	25.07
		349000	1745.0	1 / 26	25.17
		355000	1775.0	1 / 50	25.14
	16-QAM	343000	1715.0	1 / 26	23.87
		349000	1745.0	1 / 26	23.81
		355000	1775.0	1 / 1	24.18
5 MHz	π/2 BPSK	342500	1712.5	1 / 1	25.09
		349000	1745.0	1 / 12	24.86
		355500	1777.5	1 / 12	25.26
	QPSK	342500	1712.5	1 / 12	25.13
		349000	1745.0	1 / 23	25.30
		355500	1777.5	1 / 1	25.17
	16-QAM	342500	1712.5	1 / 1	23.89
		349000	1745.0	1 / 1	23.86
		355500	1777.5	1 / 23	24.09

Table 7-11. Max Conducted Power Test Results - NR n66 - Ant2

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 29 of 318

7.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst-case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

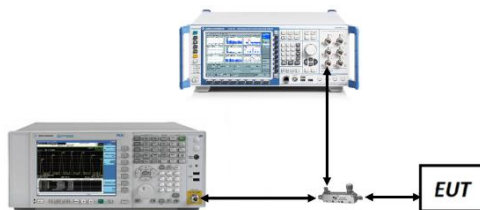


Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 30 of 318

Mode	Bandwidth	Modulation	OBW [MHz]
WCDMA-AWS	5MHz	GMSK	4.16
LTE-B71	20MHz	QPSK	17.99
		16QAM	18.00
	15MHz	QPSK	13.54
		16QAM	13.55
	10MHz	QPSK	9.01
		16QAM	9.04
	5MHz	QPSK	4.53
		16QAM	4.54
LTE-B12	10MHz	QPSK	9.05
		16QAM	9.07
	5MHz	QPSK	4.54
		16QAM	4.54
	3MHz	QPSK	2.73
		16QAM	2.71
	1.4MHz	QPSK	1.11
		16QAM	1.12
LTE-B13	10MHz	QPSK	9.04
		16QAM	9.04
	5MHz	QPSK	4.55
		16QAM	4.55
LTE-B66-4	20MHz	QPSK	18.01
		16QAM	18.04
	15MHz	QPSK	13.54
		16QAM	13.51
	10MHz	QPSK	9.02
		16QAM	9.03
	5MHz	QPSK	4.52
		16QAM	4.52
	3MHz	QPSK	2.73
		16QAM	2.72
	1.4MHz	QPSK	1.11
		16QAM	1.11

Table 7-12. Occupied Bandwidth Results – LTE - Ant1


FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 31 of 318

Mode	Bandwidth	Modulation	OBW [MHz]
NR-n12	15MHz	$\pi/2$ BPSK	13.53
		QPSK	14.23
		16QAM	14.22
	10MHz	$\pi/2$ BPSK	9.01
		QPSK	9.39
		16QAM	9.36
	5MHz	$\pi/2$ BPSK	4.56
		QPSK	4.52
		16QAM	4.53
NR-n71	35MHz	$\pi/2$ BPSK	32.45
		QPSK	33.86
		16QAM	33.87
	30MHz	$\pi/2$ BPSK	28.79
		QPSK	28.80
		16QAM	28.79
	25MHz	$\pi/2$ BPSK	23.05
		QPSK	23.93
		16QAM	23.87
	20MHz	$\pi/2$ BPSK	17.91
		QPSK	18.97
		16QAM	19.03
	15MHz	$\pi/2$ BPSK	13.48
		QPSK	14.15
		16QAM	14.17
	10MHz	$\pi/2$ BPSK	8.99
		QPSK	9.34
		16QAM	9.34
	5MHz	$\pi/2$ BPSK	4.51
		QPSK	4.53
		16QAM	4.51
NR-n70	15MHz	$\pi/2$ BPSK	13.50
		QPSK	14.18
		16QAM	14.18
	10MHz	$\pi/2$ BPSK	9.00
		QPSK	9.35
		16QAM	9.35
	5MHz	$\pi/2$ BPSK	4.53
		QPSK	4.53
		16QAM	4.52
NR-n66	45MHz	$\pi/2$ BPSK	43.22
		QPSK	43.63
		16QAM	43.58
	40MHz	$\pi/2$ BPSK	38.69
		QPSK	38.77
		16QAM	38.80
	35MHz	$\pi/2$ BPSK	32.40
		QPSK	33.71
		16QAM	33.80
	30MHz	$\pi/2$ BPSK	28.72
		QPSK	28.71
		16QAM	28.76
	25MHz	$\pi/2$ BPSK	23.04
		QPSK	23.87
		16QAM	23.84
	20MHz	$\pi/2$ BPSK	17.94
		QPSK	19.02
		16QAM	19.03
	15MHz	$\pi/2$ BPSK	13.50
		QPSK	14.19
		16QAM	14.18
	10MHz	$\pi/2$ BPSK	9.00
		QPSK	9.36
		16QAM	9.34
	5MHz	$\pi/2$ BPSK	4.53
		QPSK	4.52
		16QAM	4.51

Table 7-13. Occupied Bandwidth Results – NR - Ant1

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 32 of 318


WCDMA AWS – ANT1

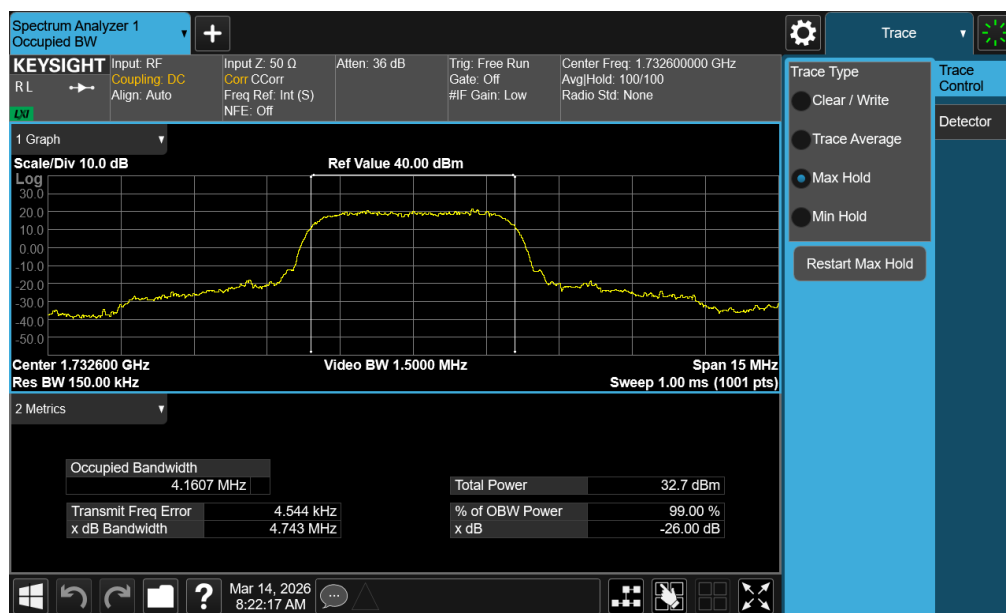


Plot 7-1. Occupied Bandwidth Plot (WCDMA, Ch. 1413 – ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 33 of 318

LTE Band 71 – ANT1

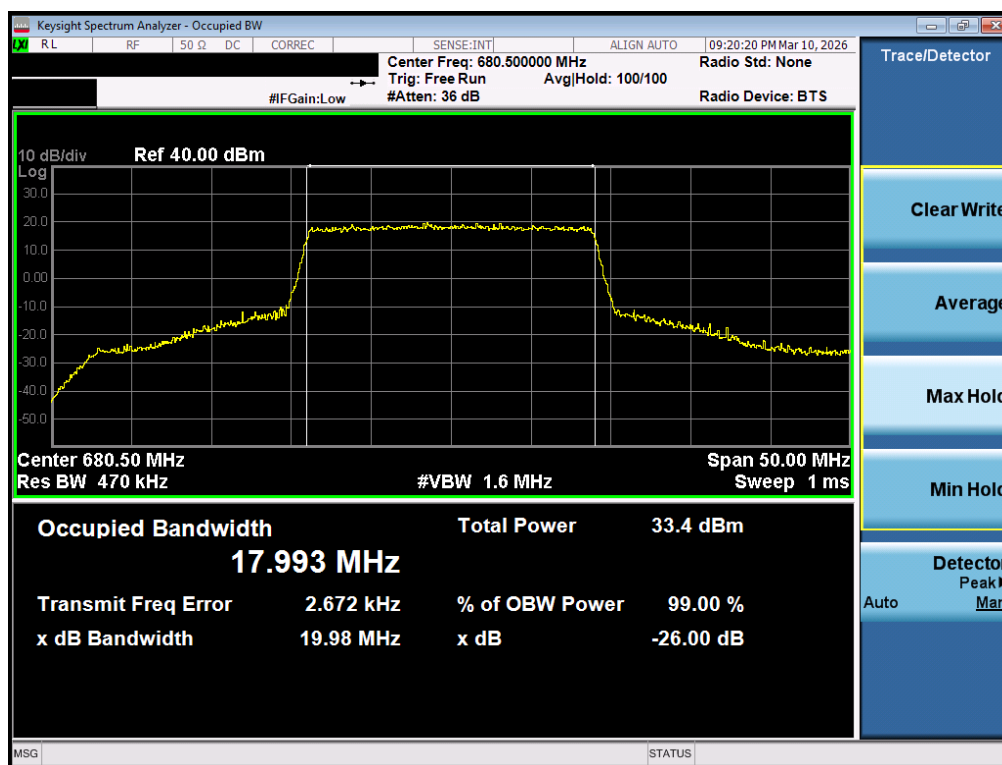


Plot 7-2. Occupied Bandwidth Plot (LTE Band 71 - 20MHz QPSK - Full RB – ANT1)

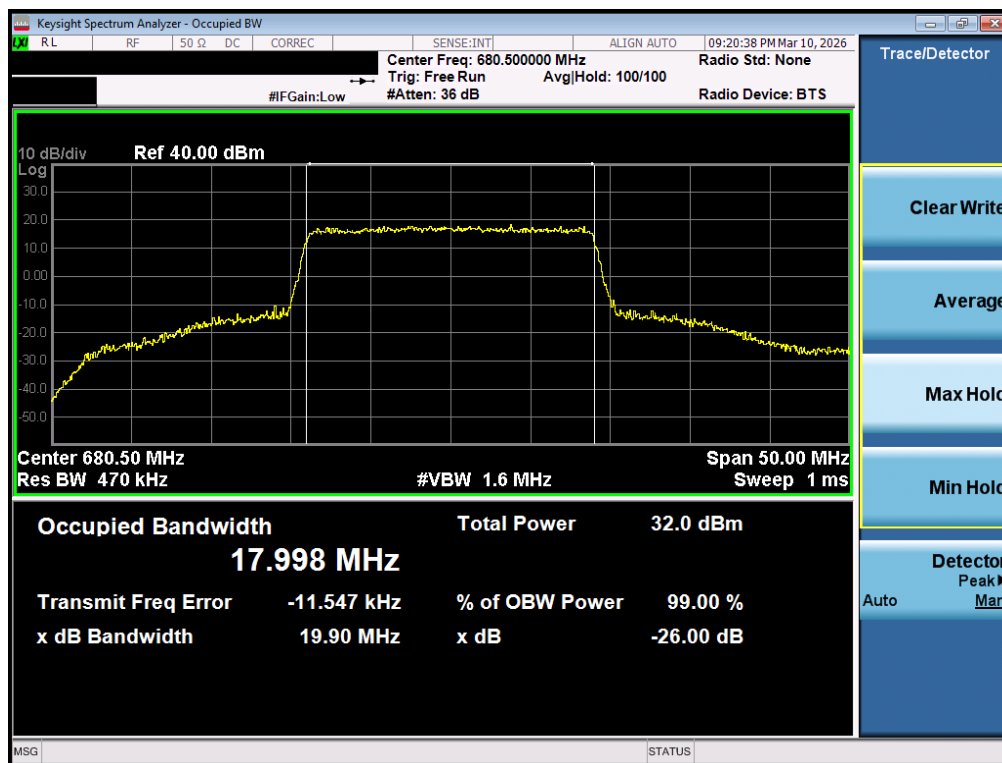


Plot 7-3. Occupied Bandwidth Plot (LTE Band 71 - 20MHz 16-QAM - Full RB – ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2-A3L	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 34 of 318

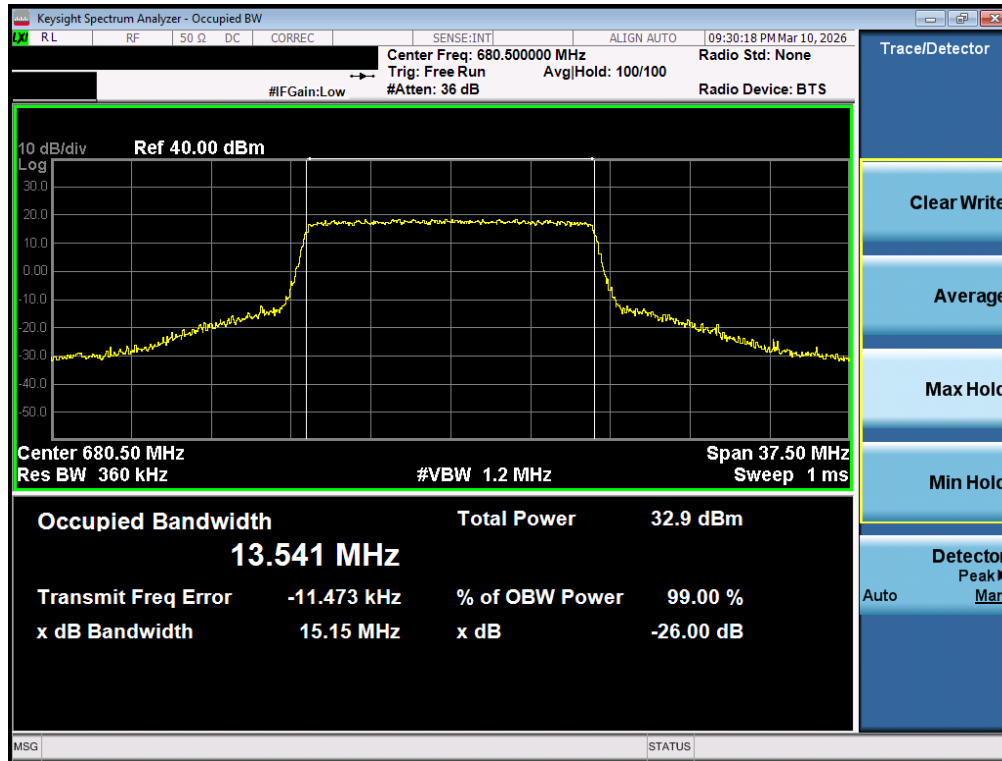


Plot 7-4. Occupied Bandwidth Plot (LTE Band 71 - 15MHz QPSK - Full RB – ANT1)

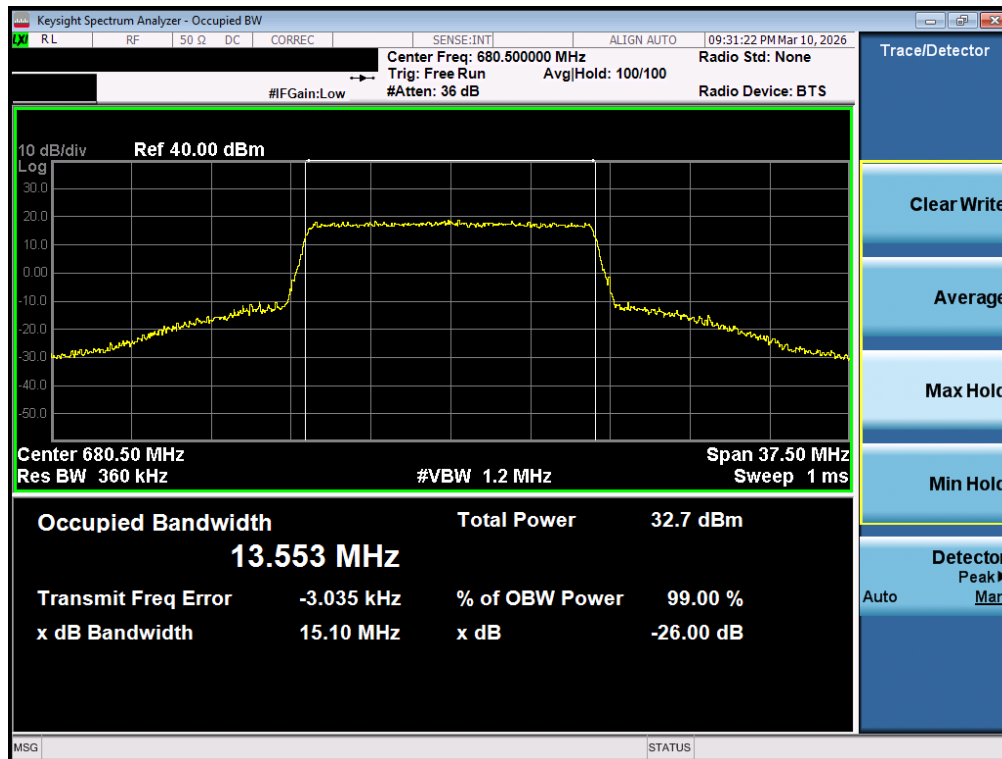


Plot 7-5. Occupied Bandwidth Plot (LTE Band 71 - 15MHz 16-QAM - Full RB – ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 35 of 318

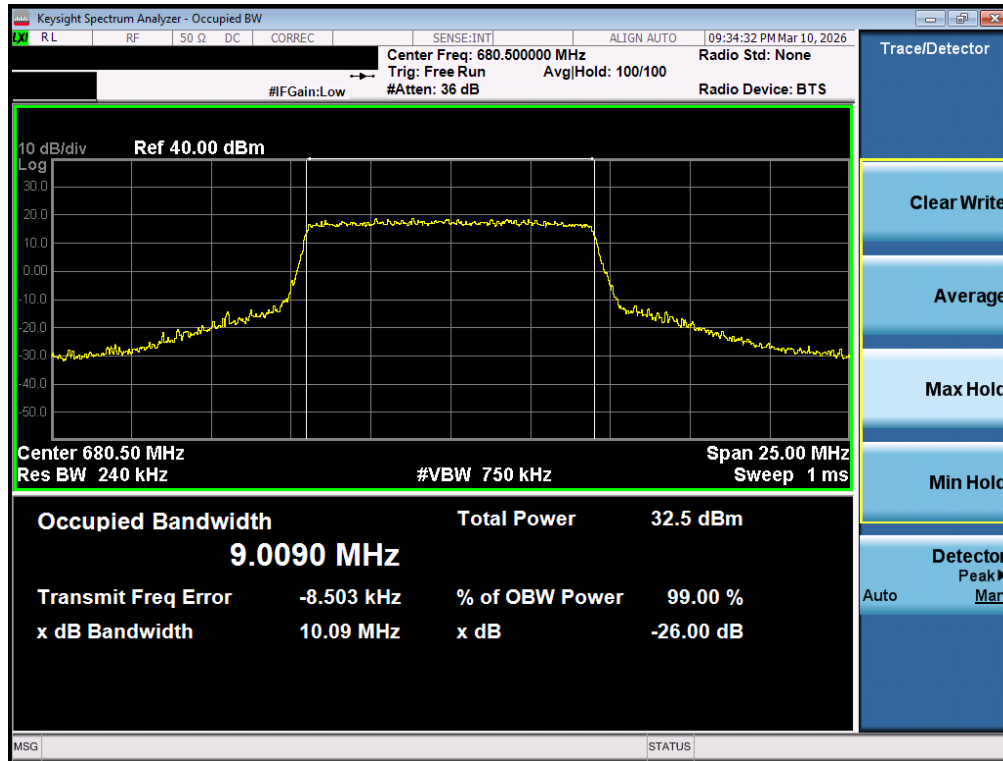


Plot 7-6. Occupied Bandwidth Plot (LTE Band 71 - 10MHz QPSK - Full RB – ANT1)

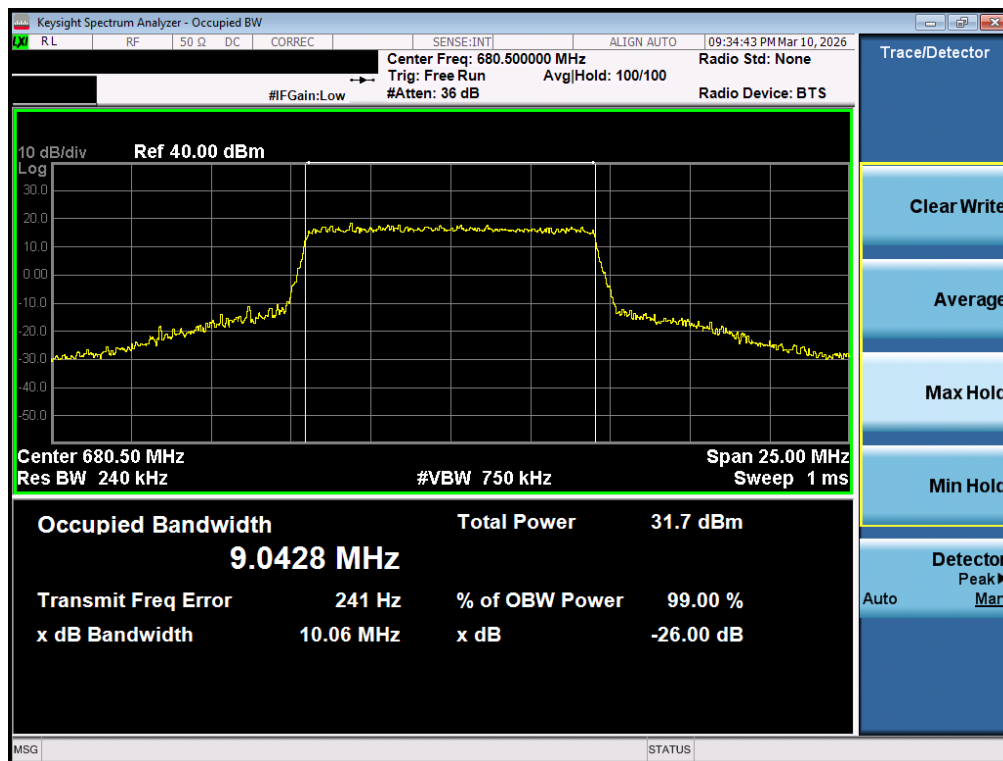


Plot 7-7. Occupied Bandwidth Plot (LTE Band 71 - 10MHz 16-QAM - Full RB – ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 36 of 318

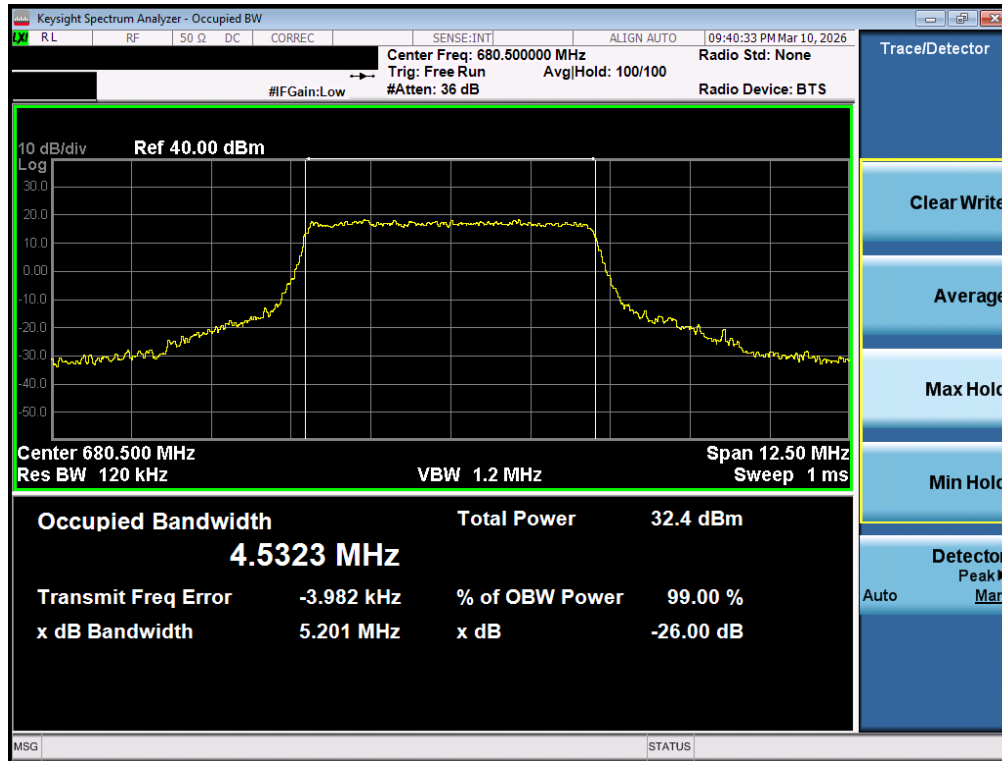

Plot 7-8. Occupied Bandwidth Plot (LTE Band 71 - 5MHz QPSK - Full RB – ANT1)

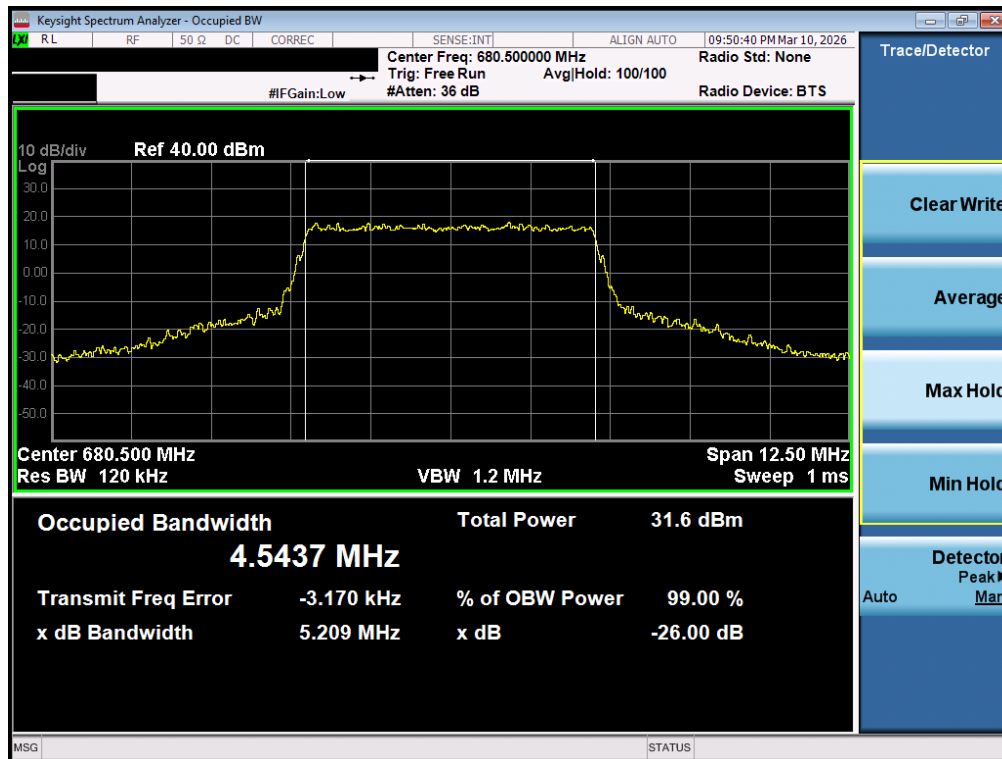

Plot 7-9. Occupied Bandwidth Plot (LTE Band 71 - 5MHz 16-QAM - Full RB – ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 37 of 318

LTE Band 12 – ANT1



Plot 7-10. Occupied Bandwidth Plot (LTE Band 12 - 10MHz QPSK - Full RB – ANT1)



Plot 7-11. Occupied Bandwidth Plot (LTE Band 12 - 10MHz 16-QAM - Full RB – ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2-A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 38 of 318




Plot 7-12. Occupied Bandwidth Plot (LTE Band 12 - 5MHz QPSK - Full RB - ANT1)



Plot 7-13. Occupied Bandwidth Plot (LTE Band 12 - 5MHz 16-QAM - Full RB - ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 39 of 318

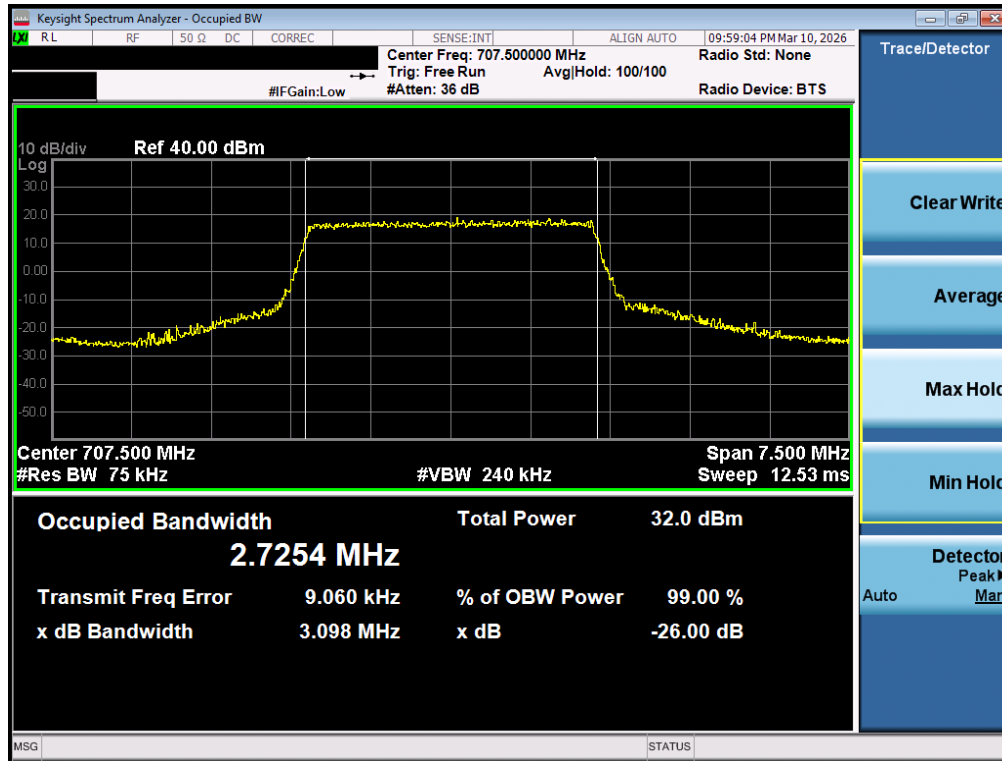


Plot 7-14. Occupied Bandwidth Plot (LTE Band 12 - 3MHz QPSK - Full RB - ANT1)




Plot 7-15. Occupied Bandwidth Plot (LTE Band 12 - 3MHz 16-QAM - Full RB - ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 40 of 318

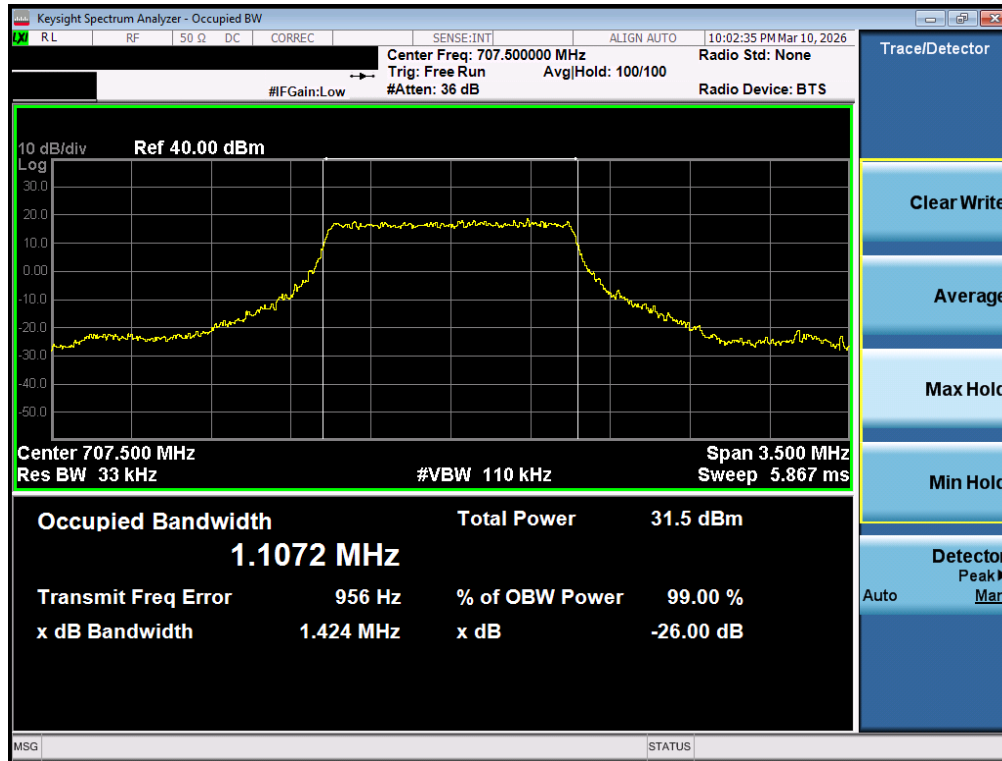


Plot 7-16. Occupied Bandwidth Plot (LTE Band 12 – 1.4MHz QPSK - Full RB – ANT1)

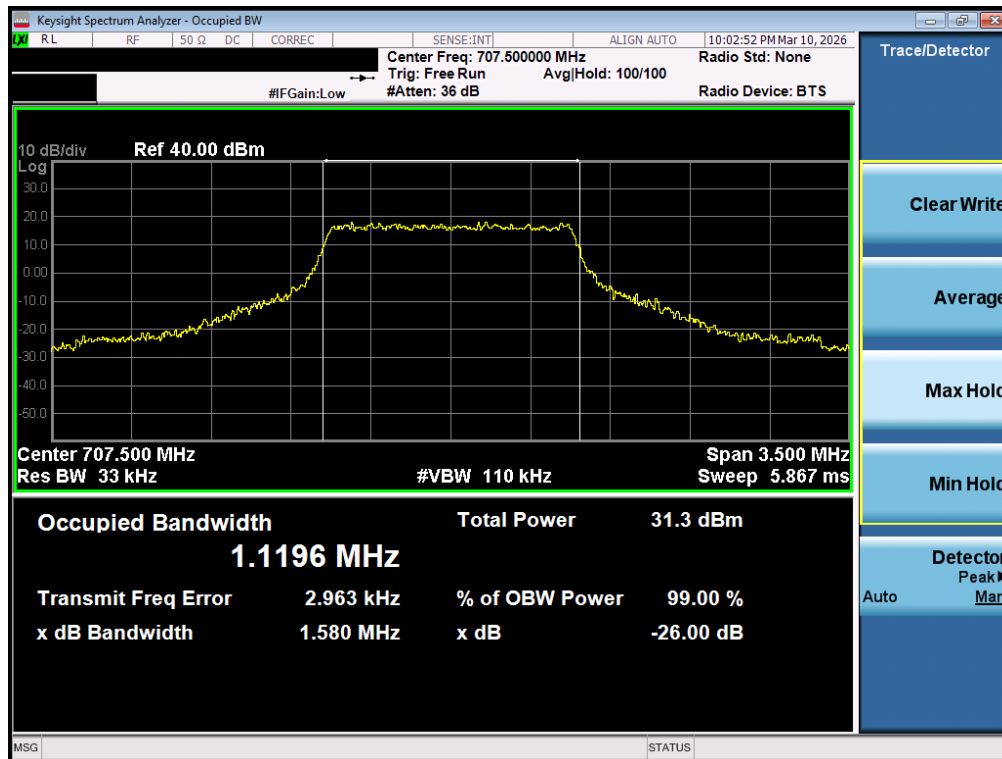

Plot 7-17. Occupied Bandwidth Plot (LTE Band 12 – 1.4MHz 16-QAM - Full RB – ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 41 of 318

LTE Band 13 – ANT1

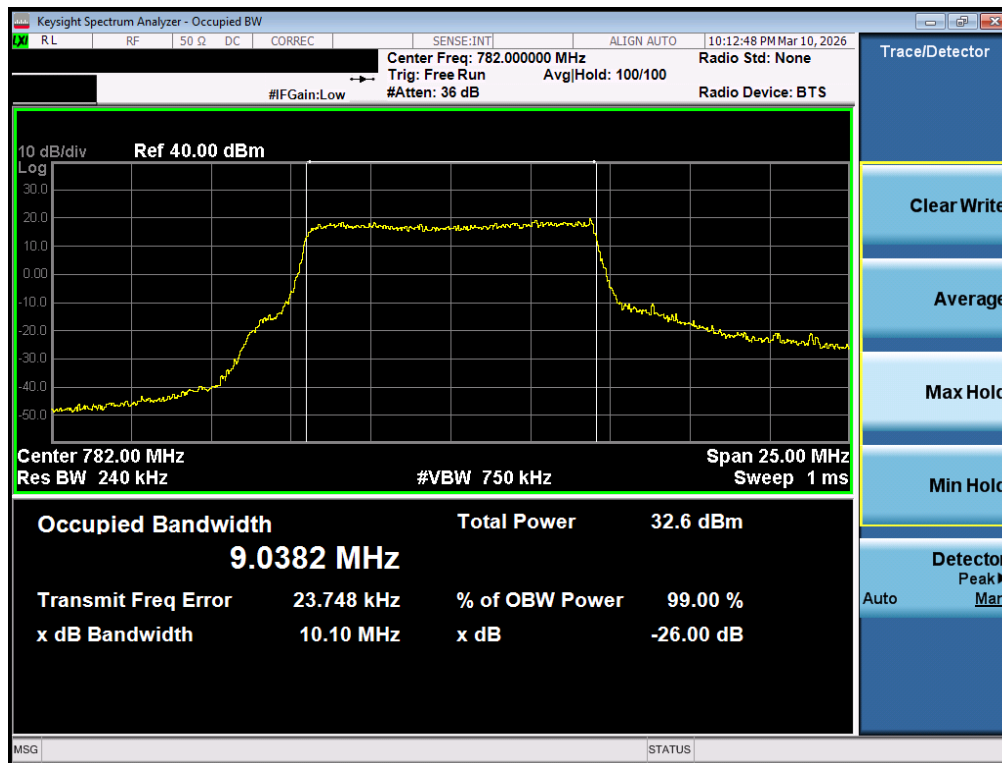

Plot 7-18. Occupied Bandwidth Plot (LTE Band 13 - 10MHz QPSK - Full RB – ANT1)




Plot 7-19. Occupied Bandwidth Plot (LTE Band 13 - 10MHz 16-QAM - Full RB – ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 42 of 318



Plot 7-20. Occupied Bandwidth Plot (LTE Band 13 - 5MHz QPSK - Full RB - ANT1)

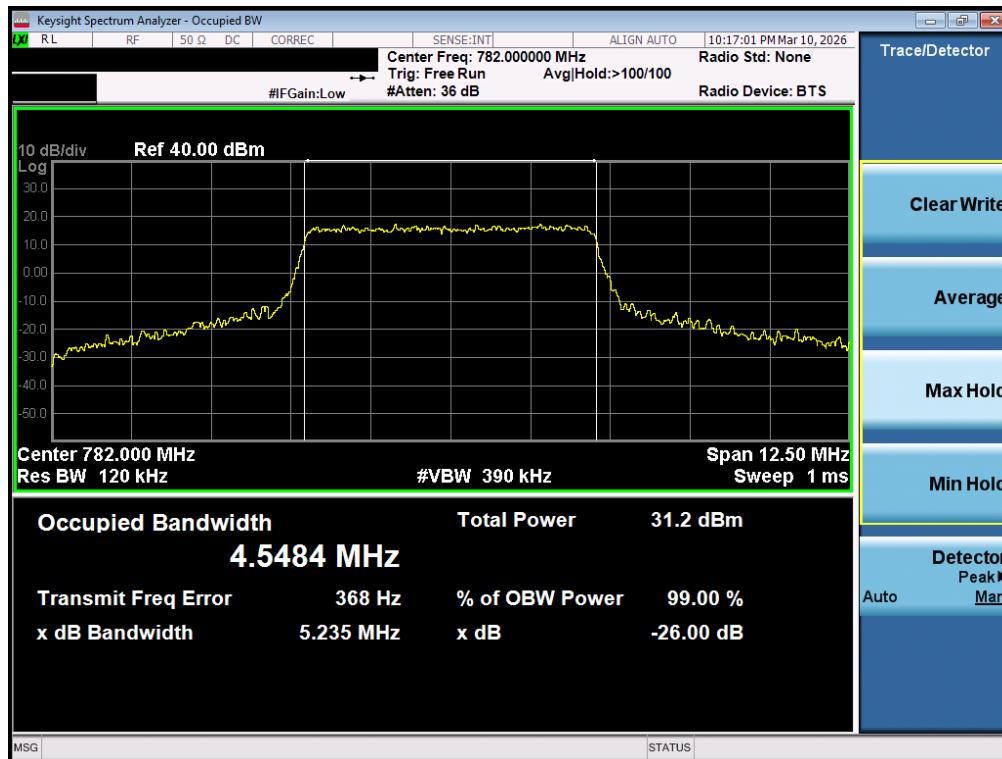


Plot 7-21. Occupied Bandwidth Plot (LTE Band 13 - 5MHz 16-QAM - Full RB - ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 43 of 318

LTE Band 66/4 - ANT1




Plot 7-22. Occupied Bandwidth Plot (LTE Band 66/4 - 20MHz QPSK - Full RB - ANT1)

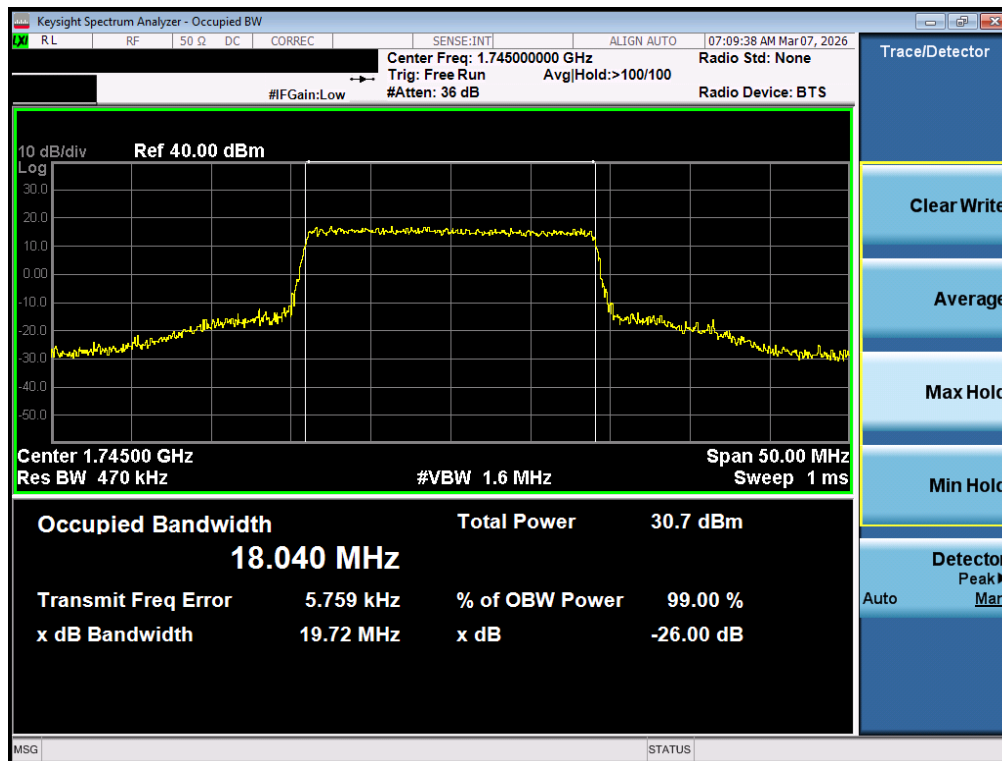


Plot 7-23. Occupied Bandwidth Plot (LTE Band 66/4 - 20MHz 16-QAM - Full RB - ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2-A3L	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 44 of 318

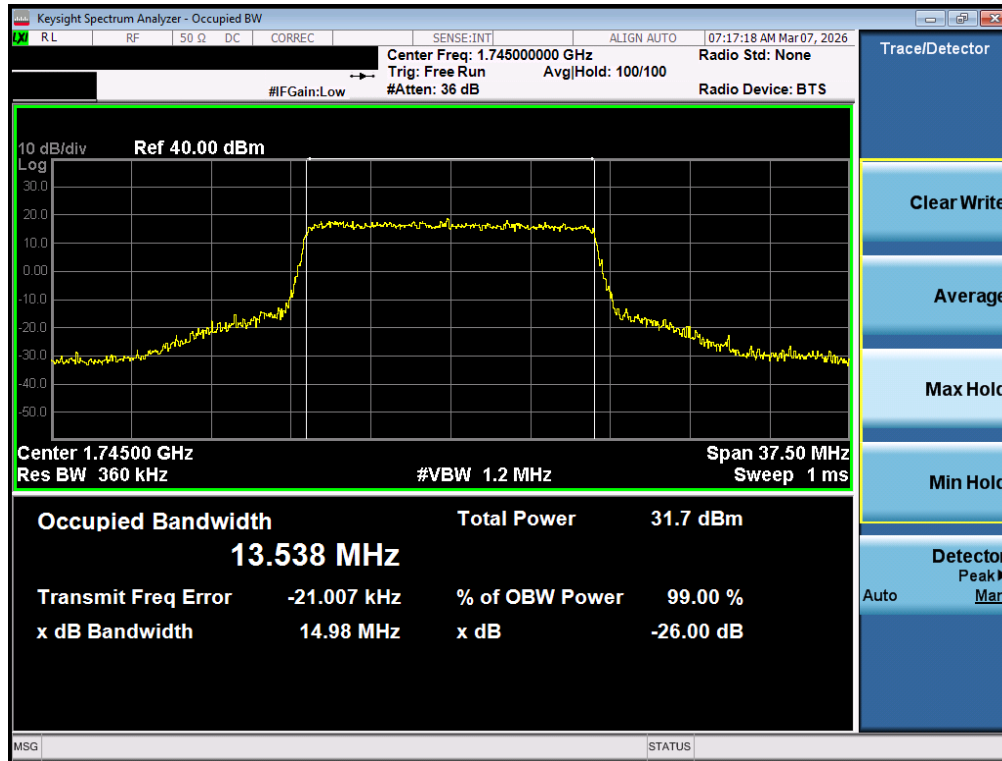


Plot 7-24. Occupied Bandwidth Plot (LTE Band 66/4 - 15MHz QPSK - Full RB - ANT1)

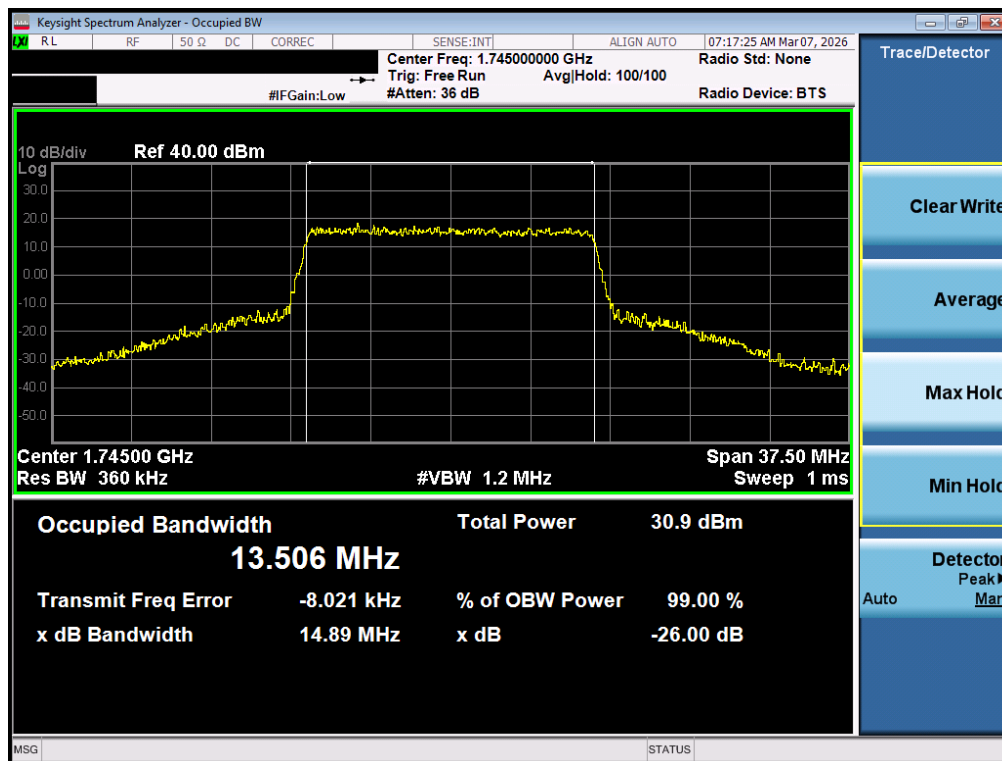

Plot 7-25. Occupied Bandwidth Plot (LTE Band 66/4 - 15MHz 16-QAM - Full RB - ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 45 of 318

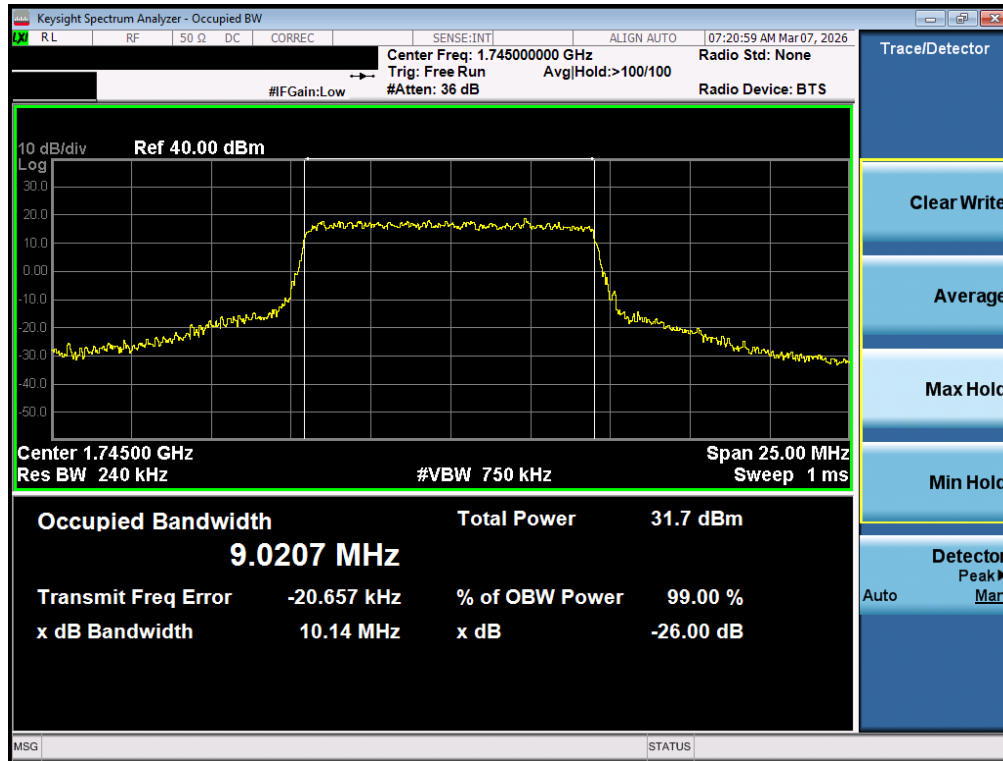


Plot 7-26. Occupied Bandwidth Plot (LTE Band 66/4 - 10MHz QPSK - Full RB - ANT1)




Plot 7-27. Occupied Bandwidth Plot (LTE Band 66/4 - 10MHz 16-QAM - Full RB - ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 46 of 318

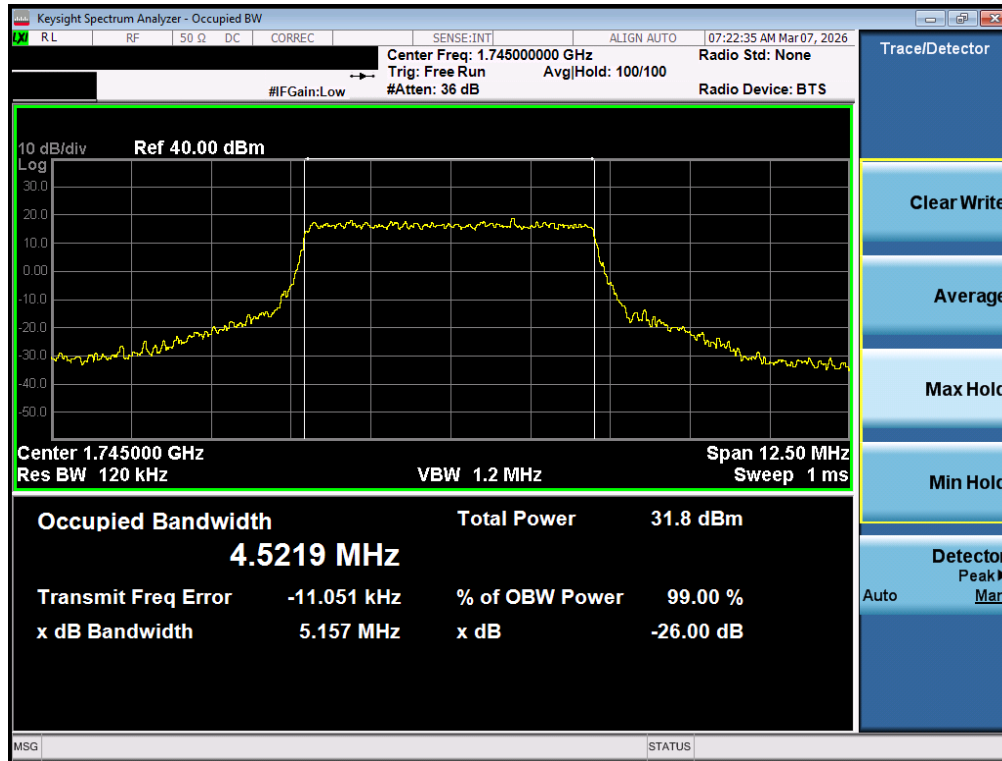


Plot 7-28. Occupied Bandwidth Plot (LTE Band 66/4 - 5MHz QPSK - Full RB - ANT1)

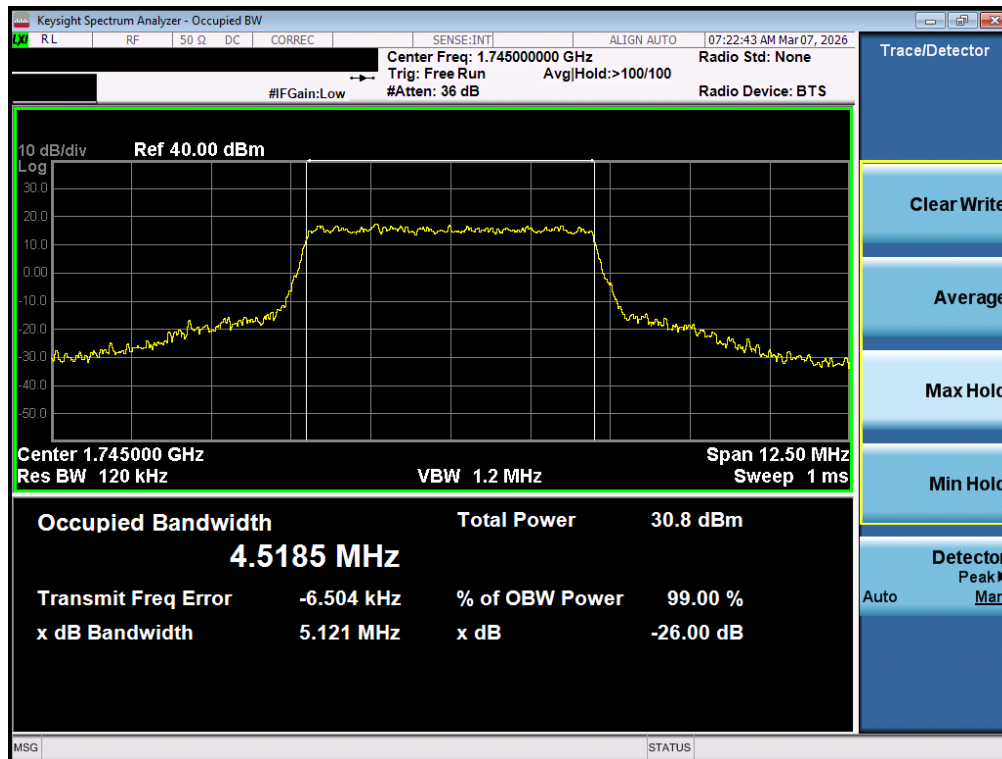


Plot 7-29. Occupied Bandwidth Plot (LTE Band 66/4 - 5MHz 16-QAM - Full RB - ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 47 of 318

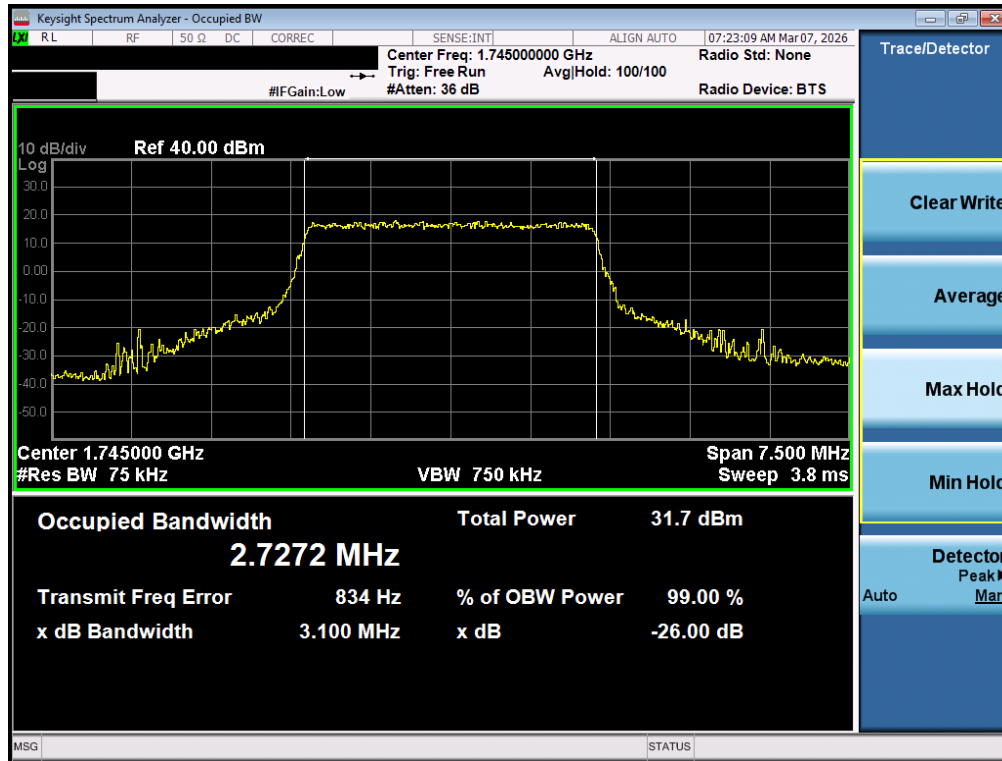


Plot 7-30. Occupied Bandwidth Plot (LTE Band 66/4 - 3MHz QPSK - Full RB - ANT1)

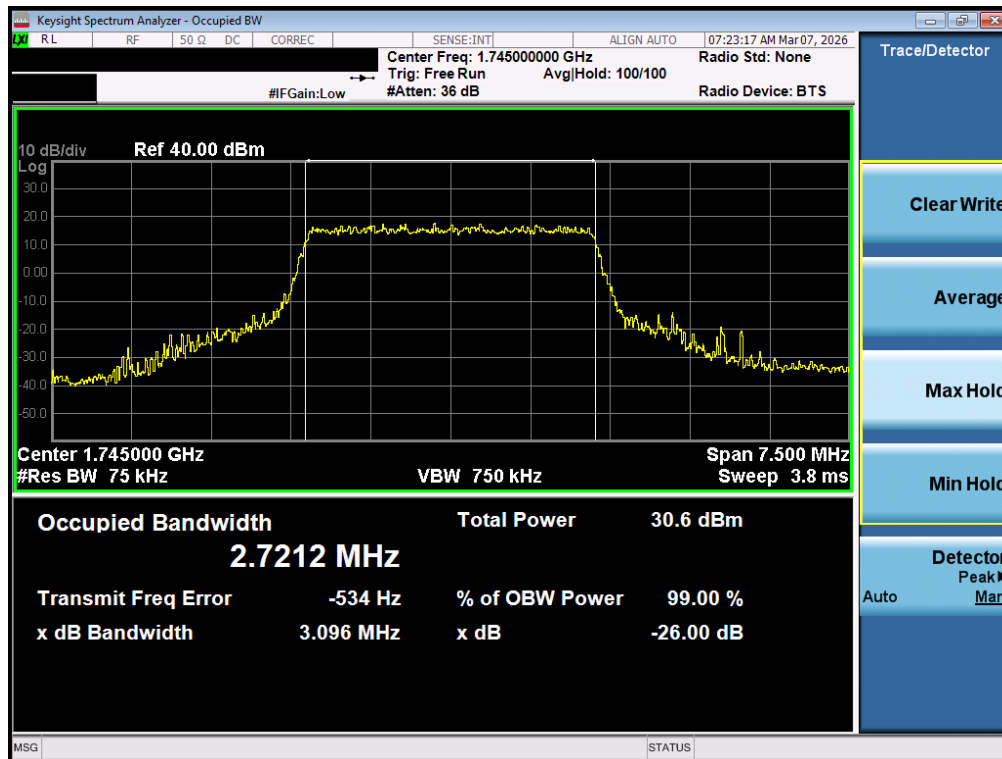


Plot 7-31. Occupied Bandwidth Plot (LTE Band 66/4 - 3MHz 16-QAM - Full RB - ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2-A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 48 of 318

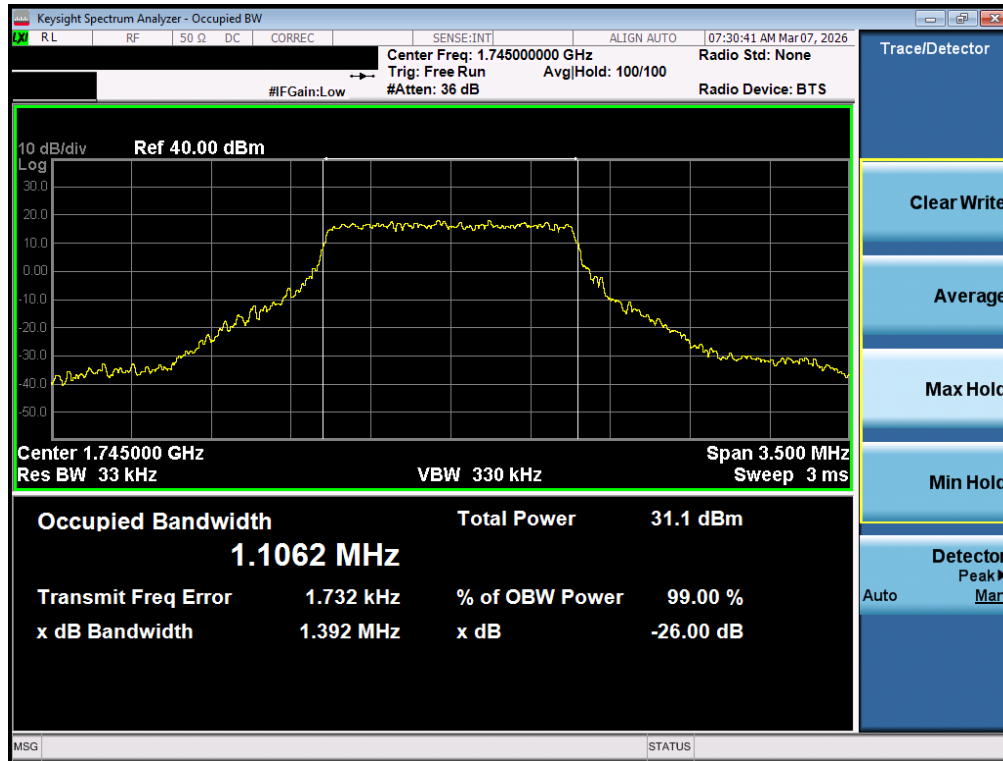



Plot 7-32. Occupied Bandwidth Plot (LTE Band 66/4 - 1.4MHz QPSK - Full RB - ANT1)

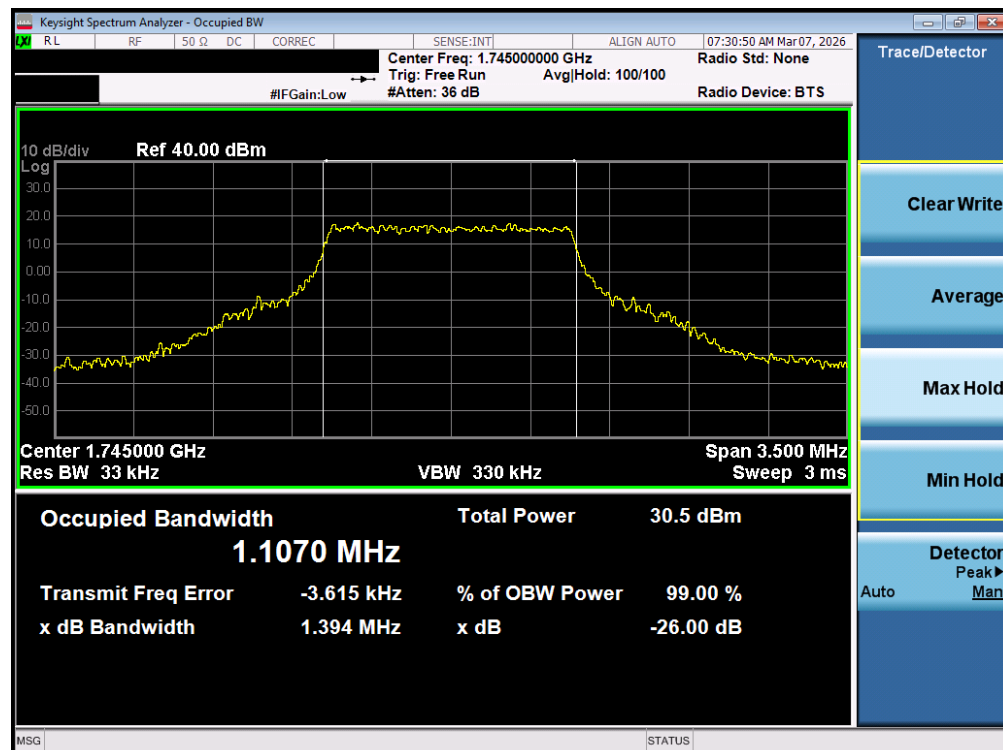


Plot 7-33. Occupied Bandwidth Plot (LTE Band 66/4 - 1.4MHz 16-QAM - Full RB - ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 49 of 318



NR Band n12 – ANT1

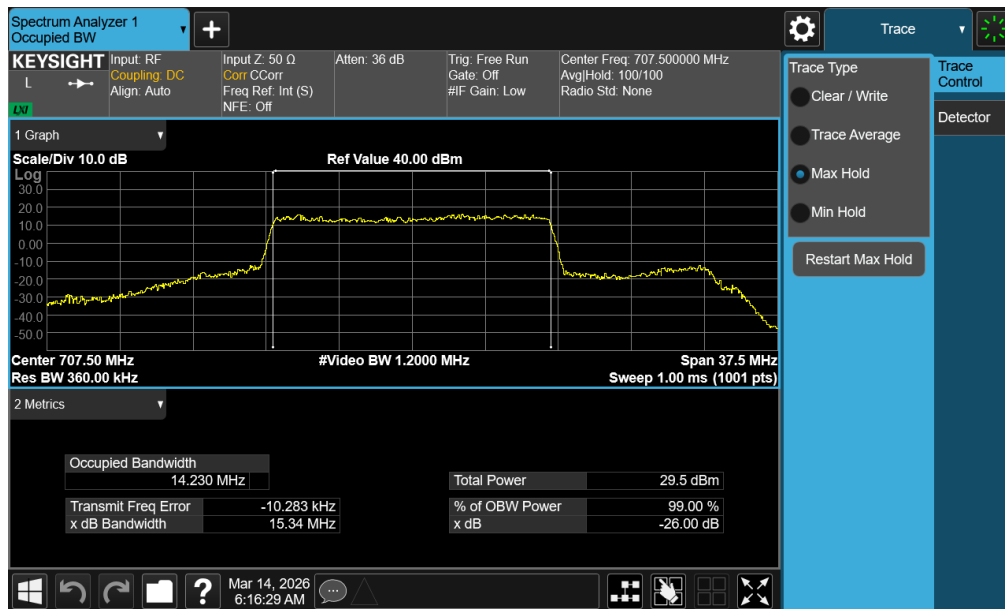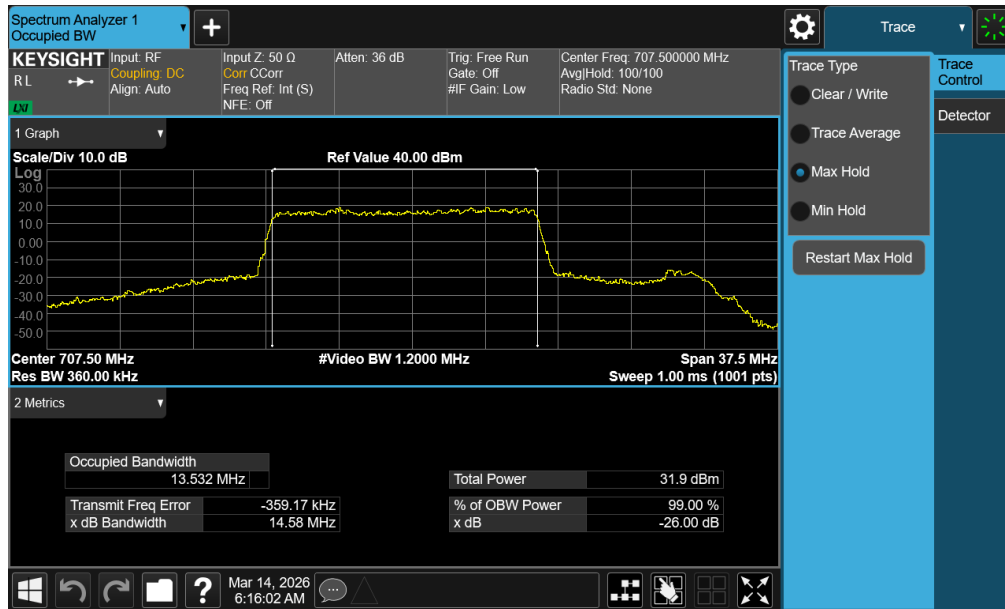



FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 50 of 318

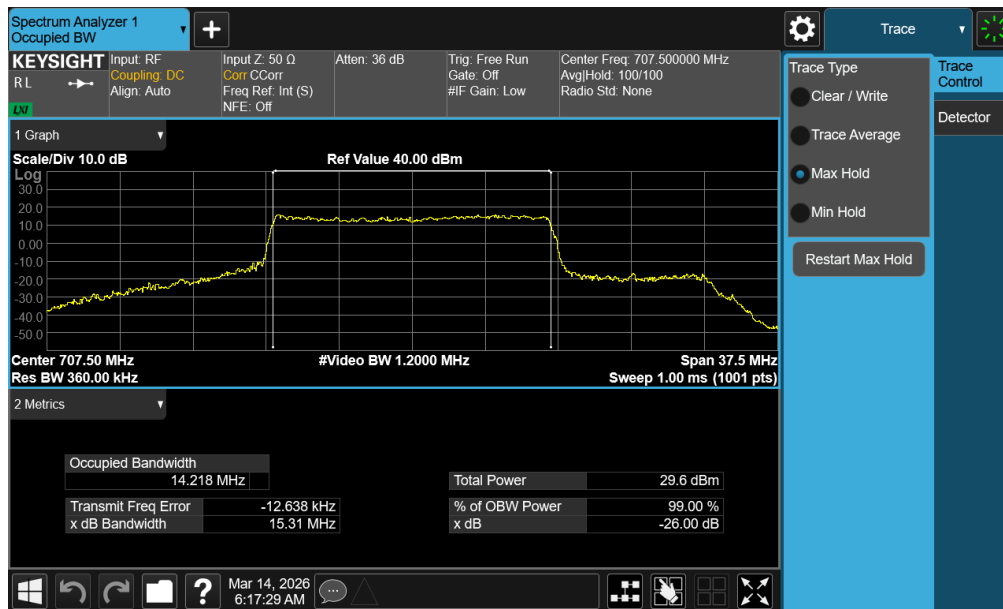


FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 51 of 318

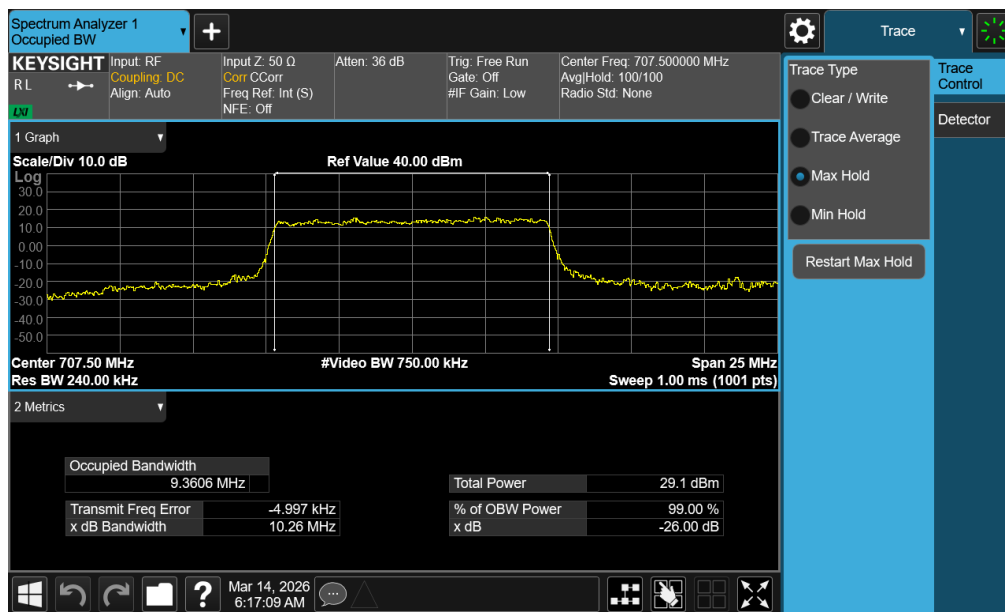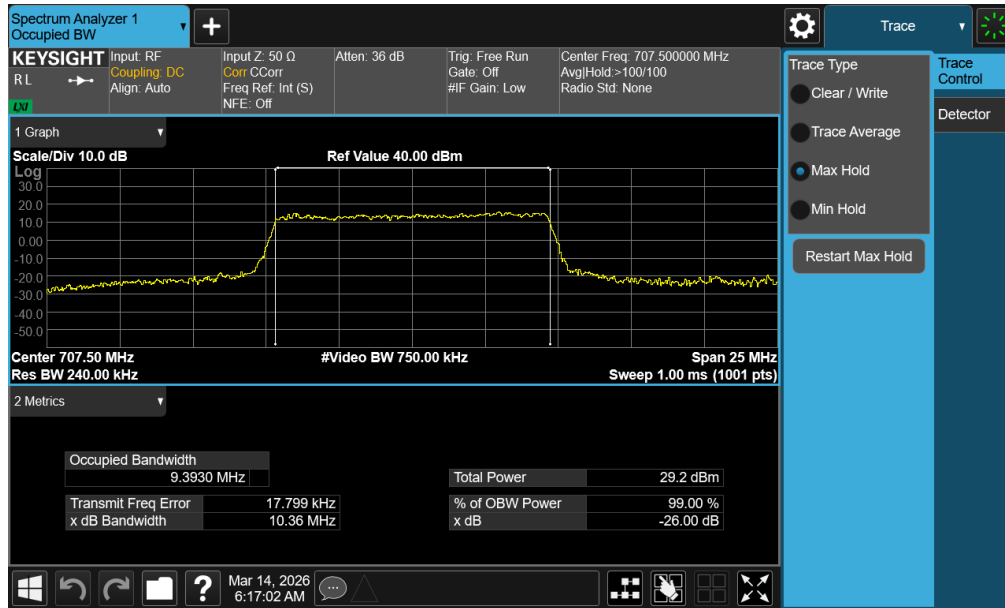

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 52 of 318

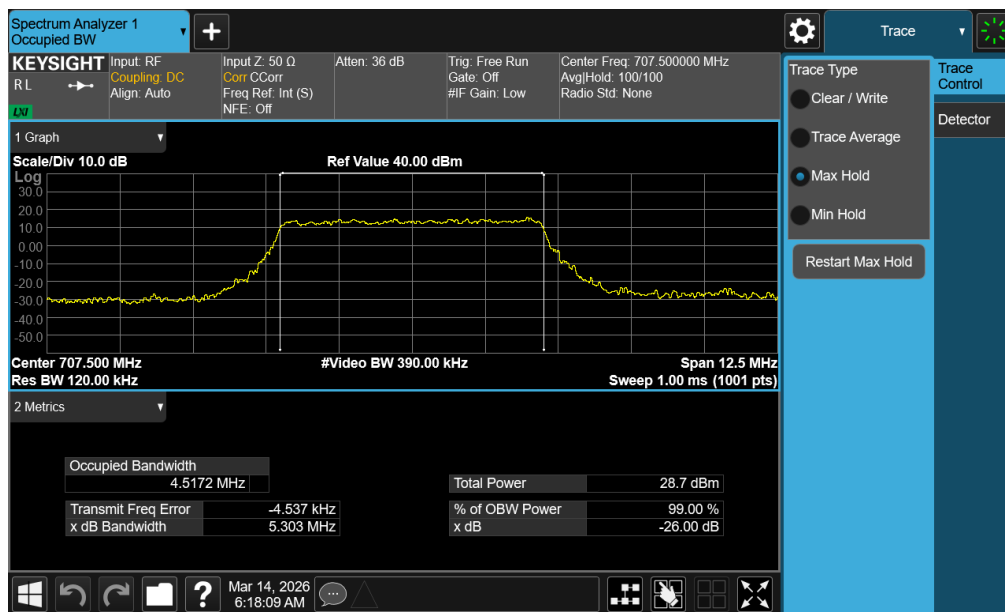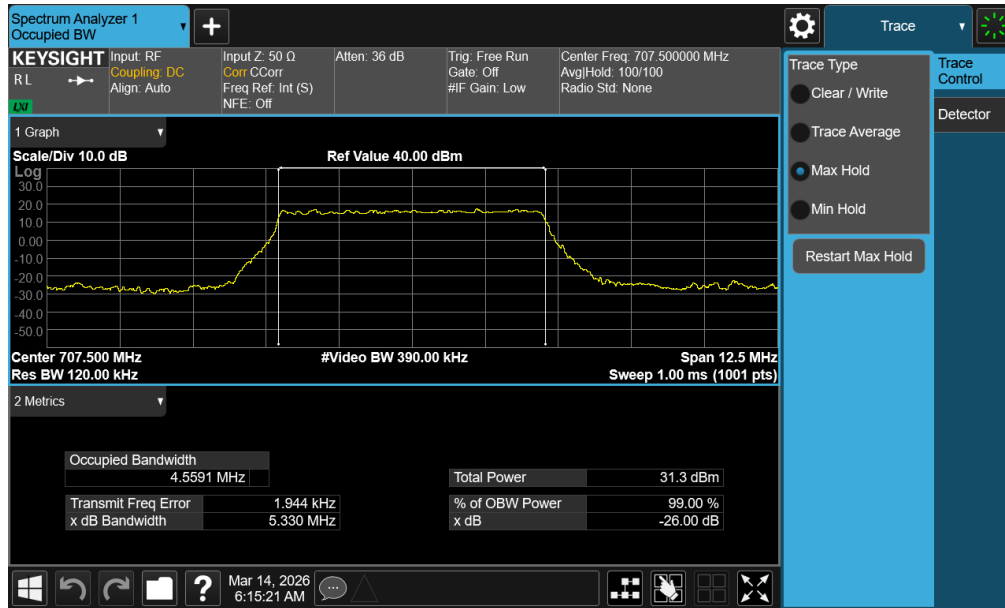


FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 53 of 318

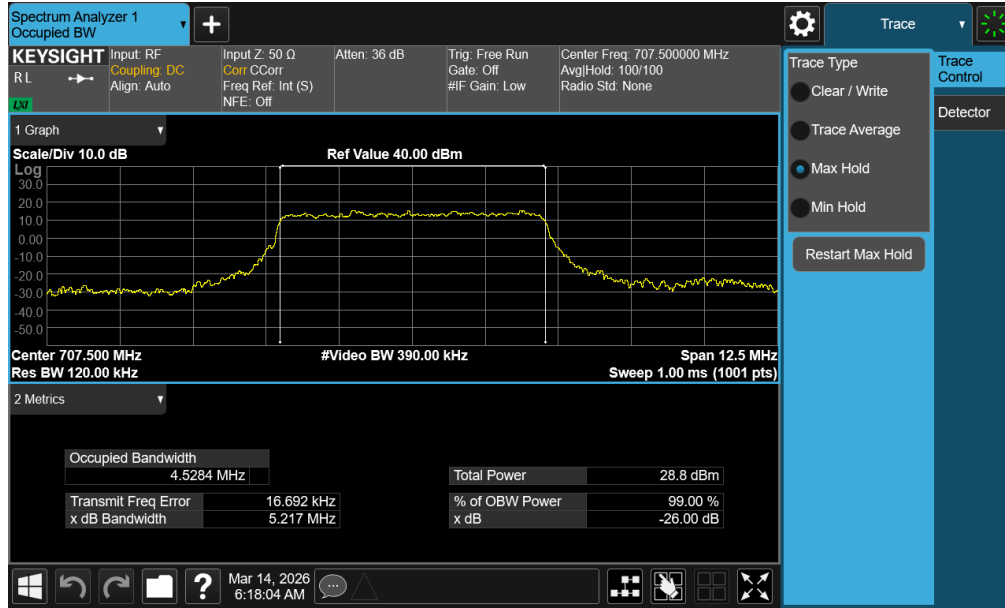


Plot 7-42. Occupied Bandwidth Plot (NR Band n12 - 5MHz CP-OFDM 16-QAM - Full RB – ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 54 of 318

NR Band n71 – ANT1


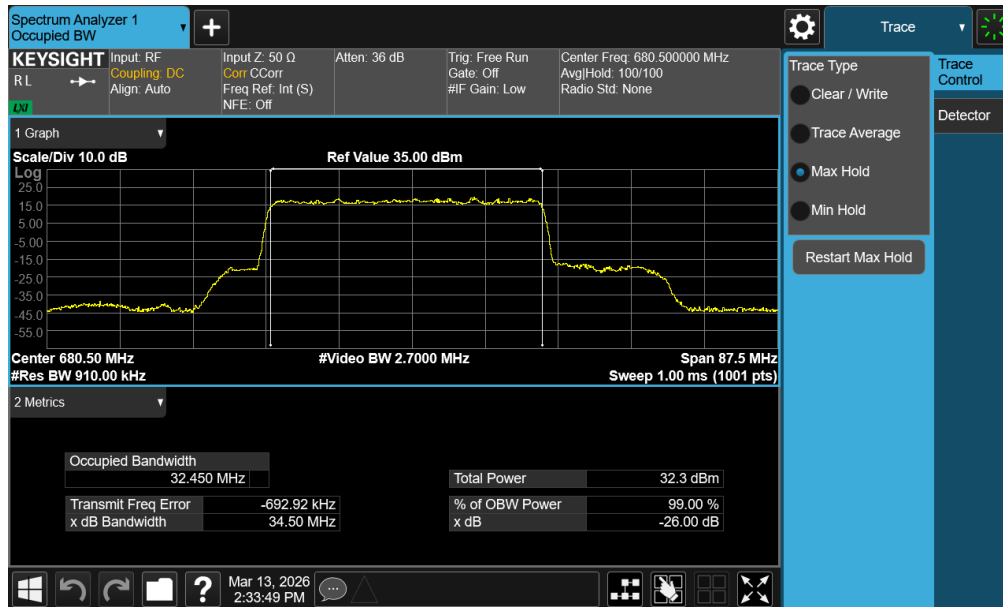


Plot 7-43. Occupied Bandwidth Plot (NR Band n71 - 35MHz DFT-s-OFDM BPSK - Full RB – ANT1)


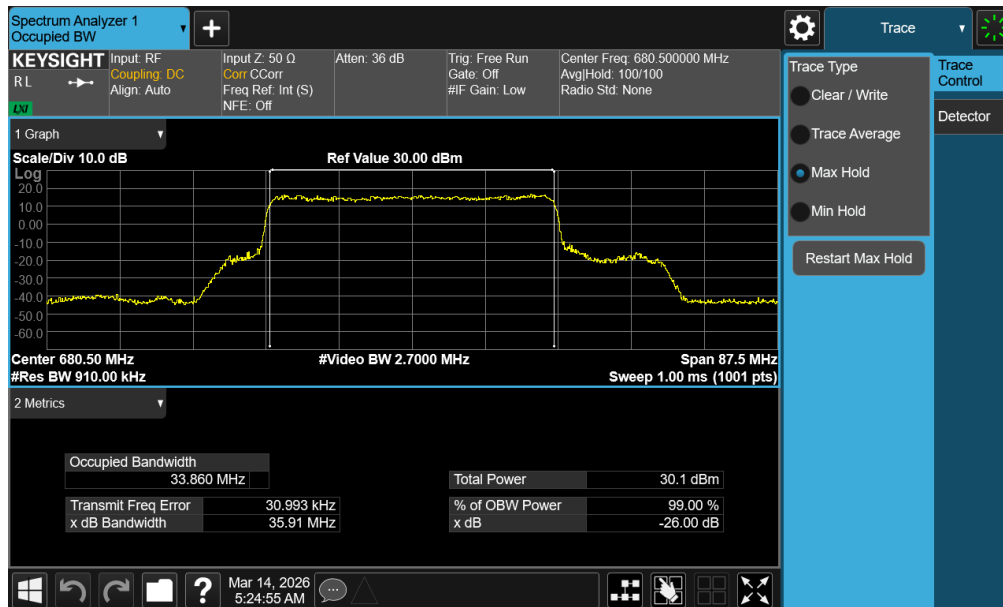


Plot 7-44. Occupied Bandwidth Plot (NR Band n71 - 35MHz CP-OFDM QPSK - Full RB – ANT1)


FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 55 of 318

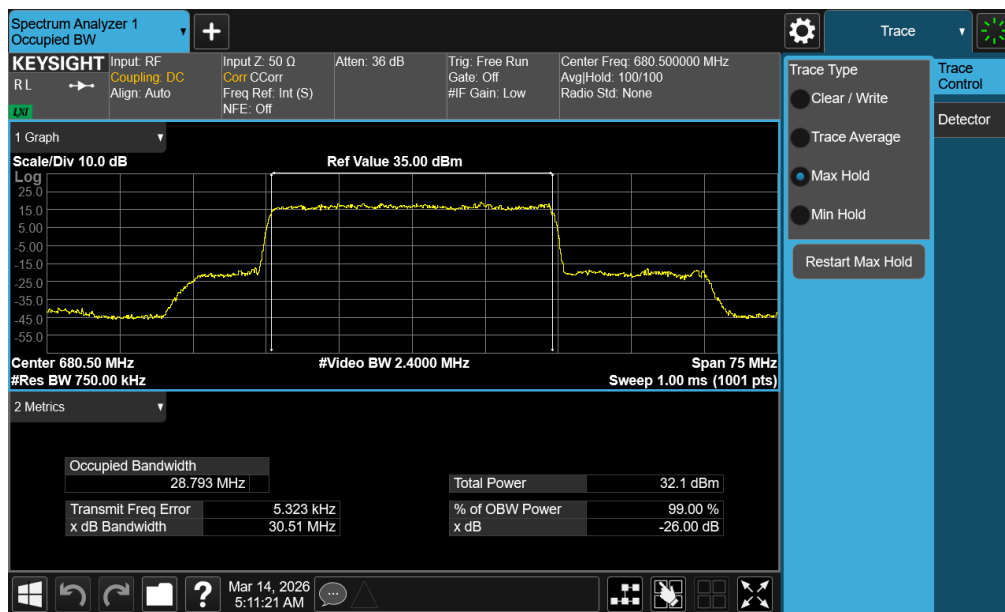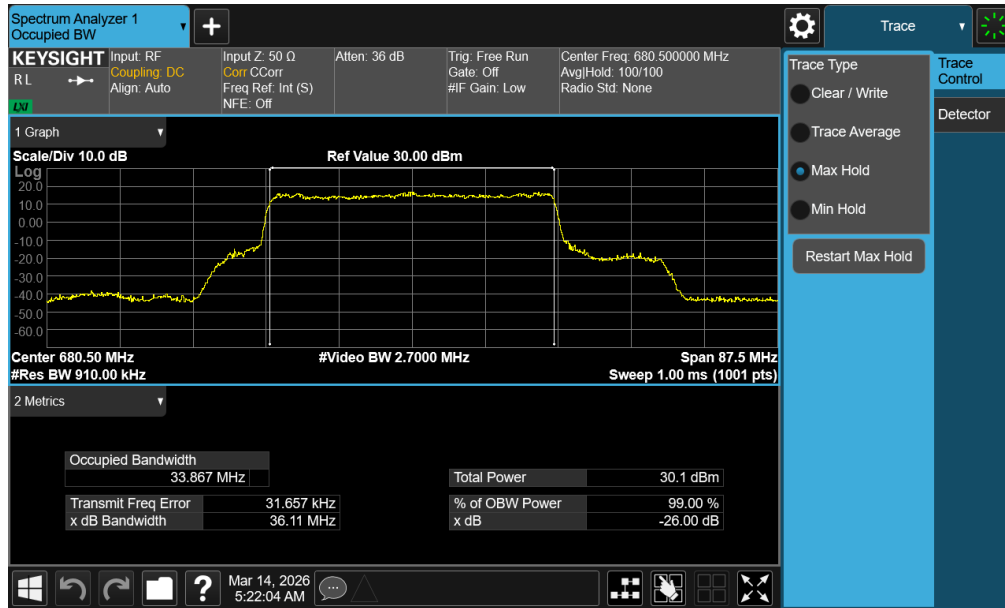


FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 56 of 318

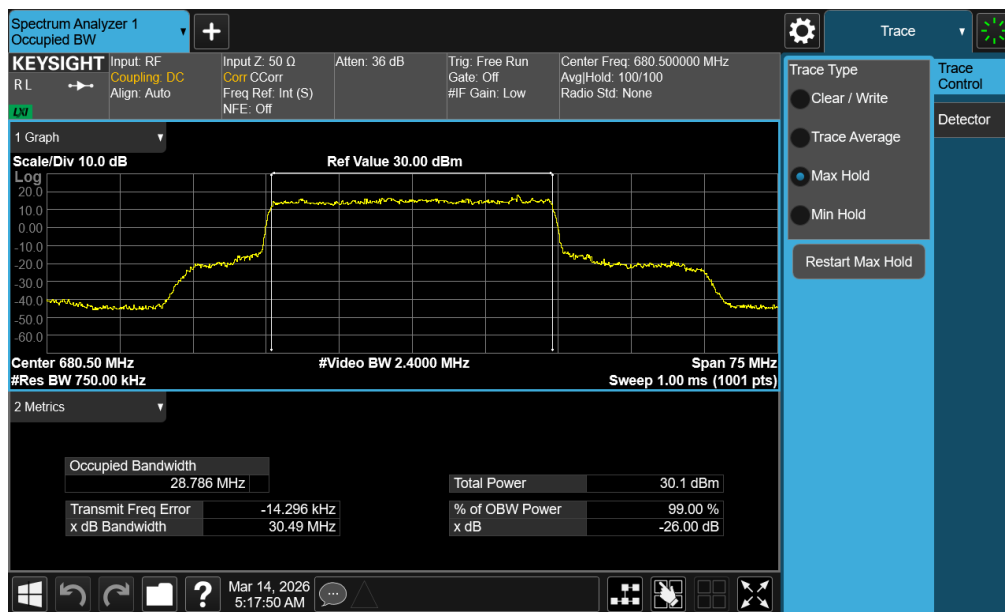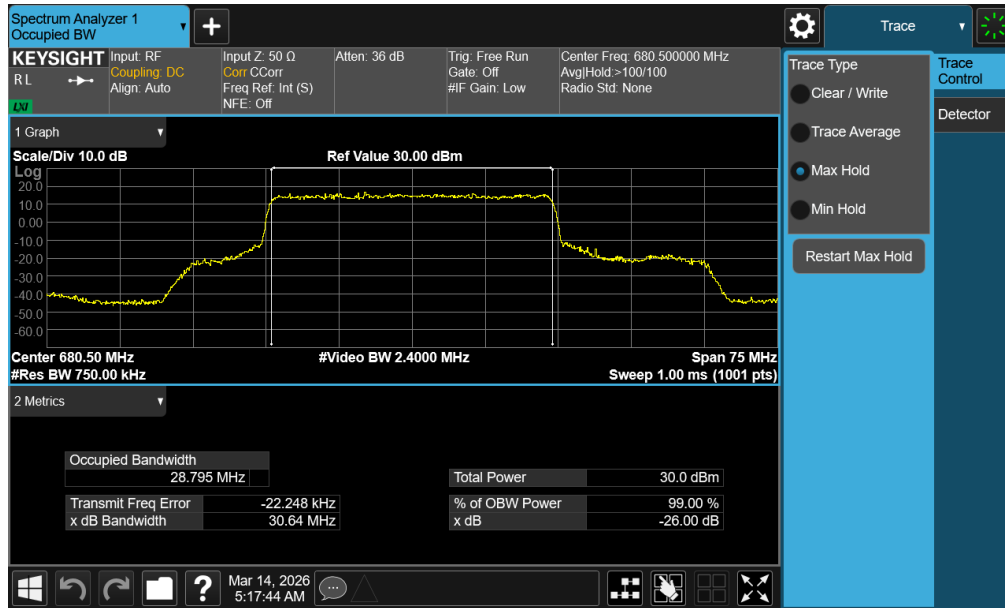

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 57 of 318


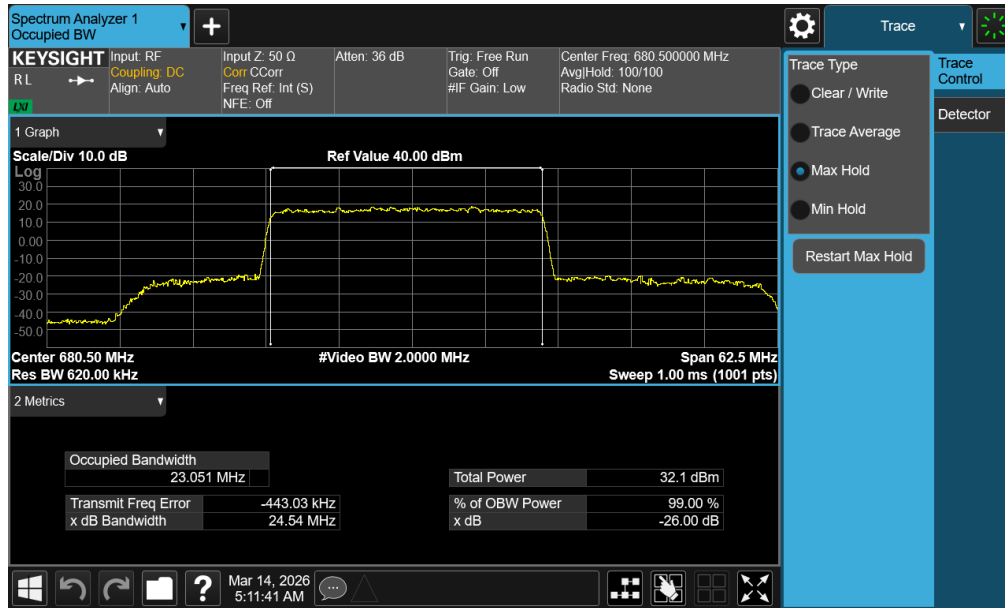


Plot 7-49. Occupied Bandwidth Plot (NR Band n71 - 25MHz DFT-s-OFDM BPSK - Full RB – ANT1)


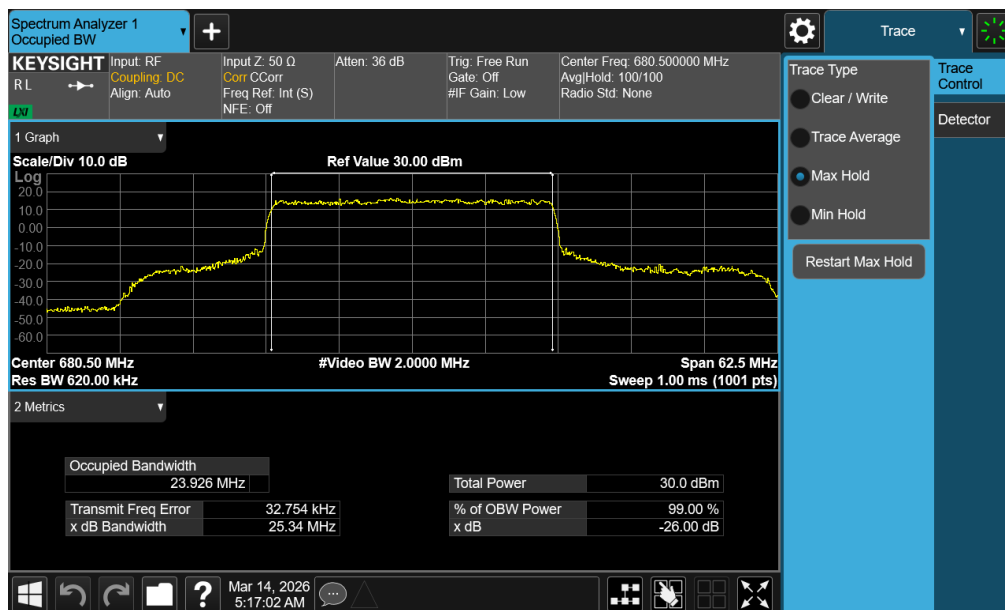


Plot 7-50. Occupied Bandwidth Plot (NR Band n71 – 25MHz CP-OFDM QPSK - Full RB – ANT1)



FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 58 of 318

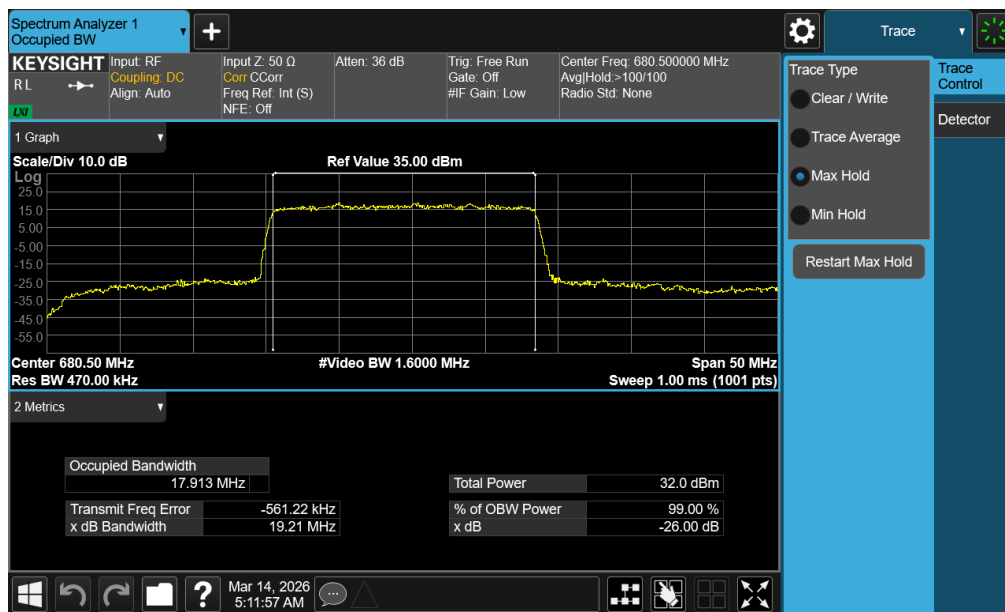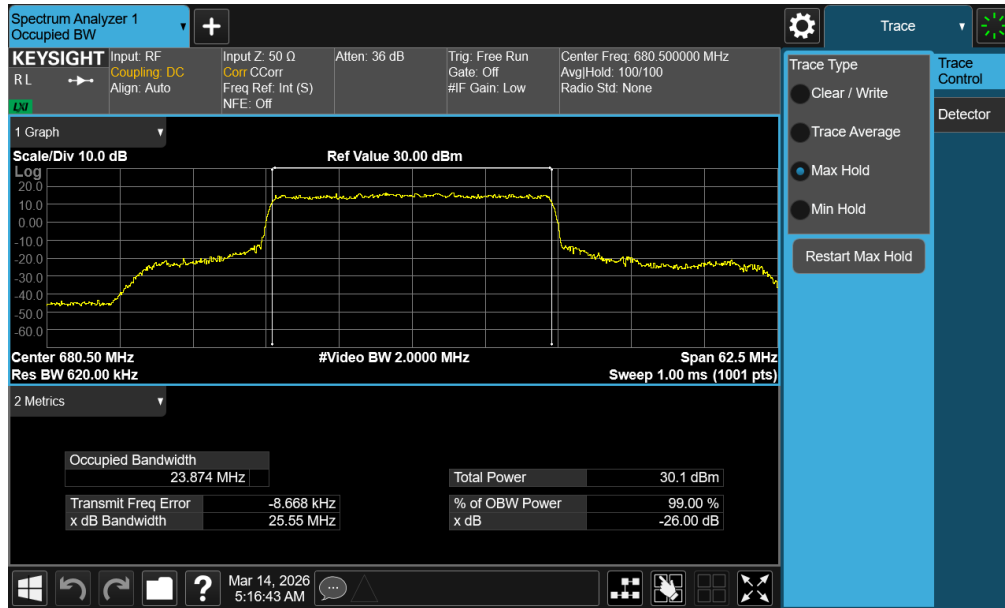


FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 59 of 318

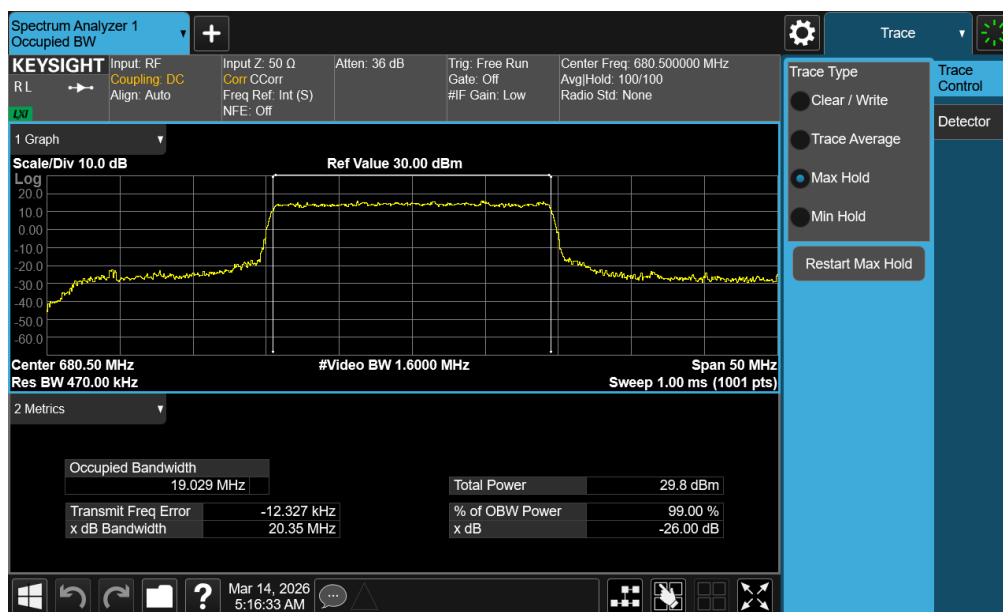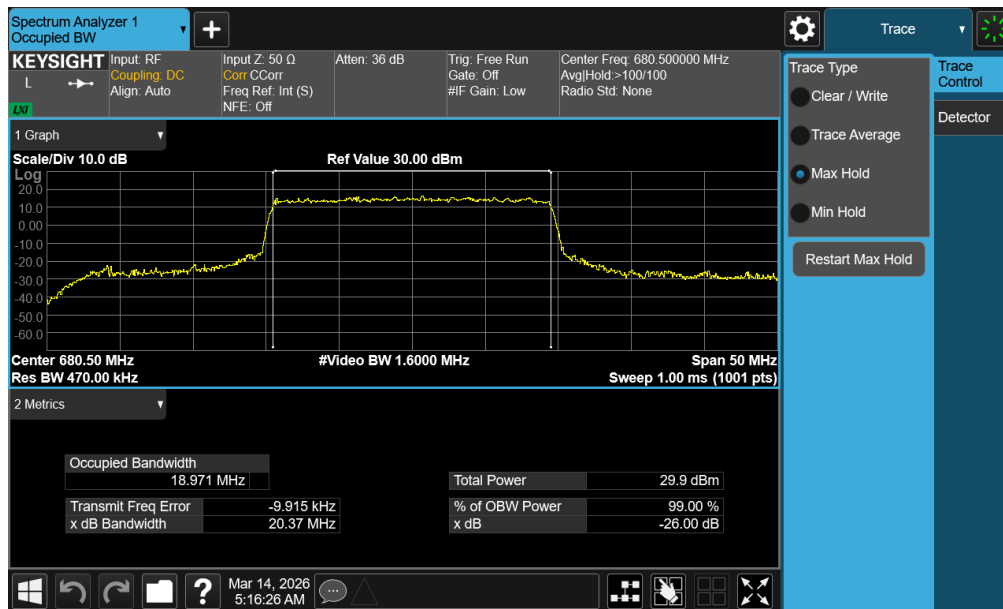


FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 60 of 318

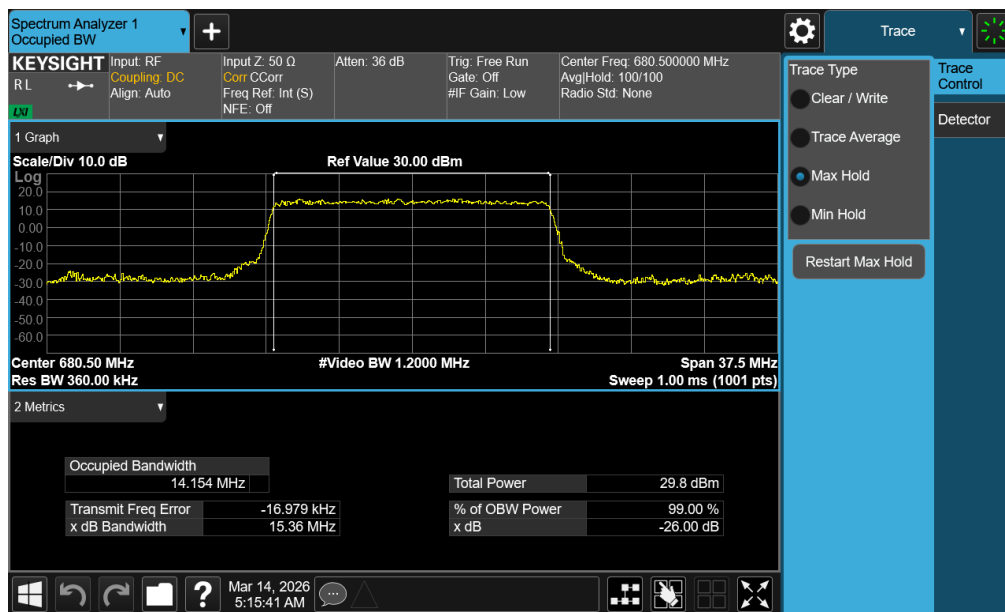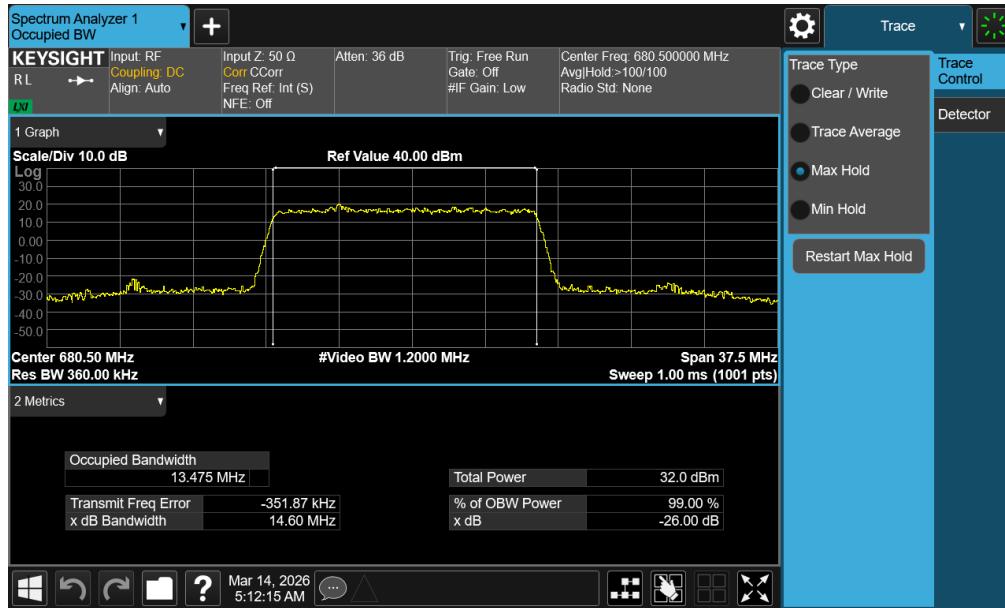

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 61 of 318


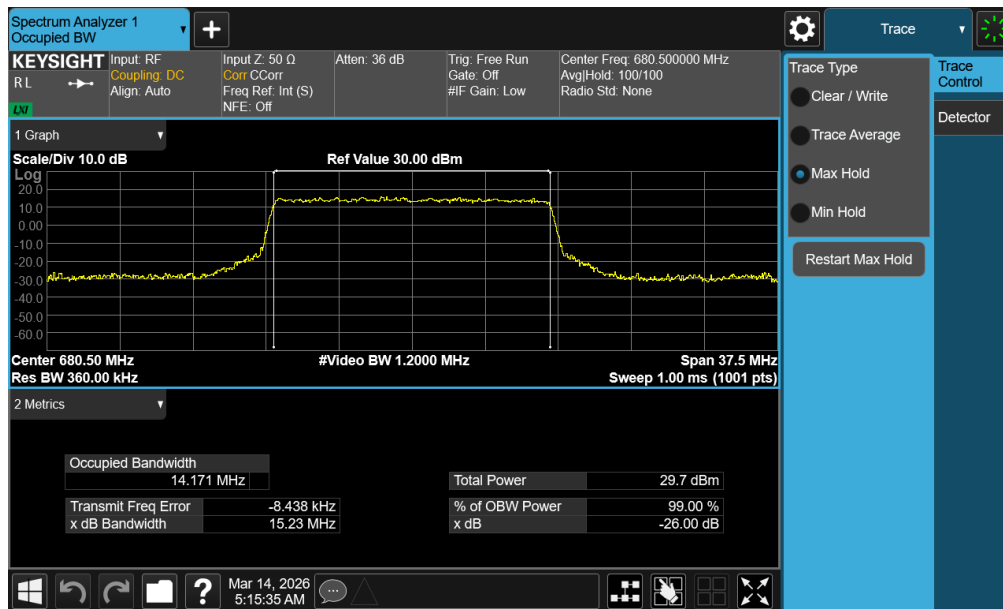


Plot 7-57. Occupied Bandwidth Plot (NR Band n71 - 15MHz CP-OFDM 16-QAM - Full RB – ANT1)


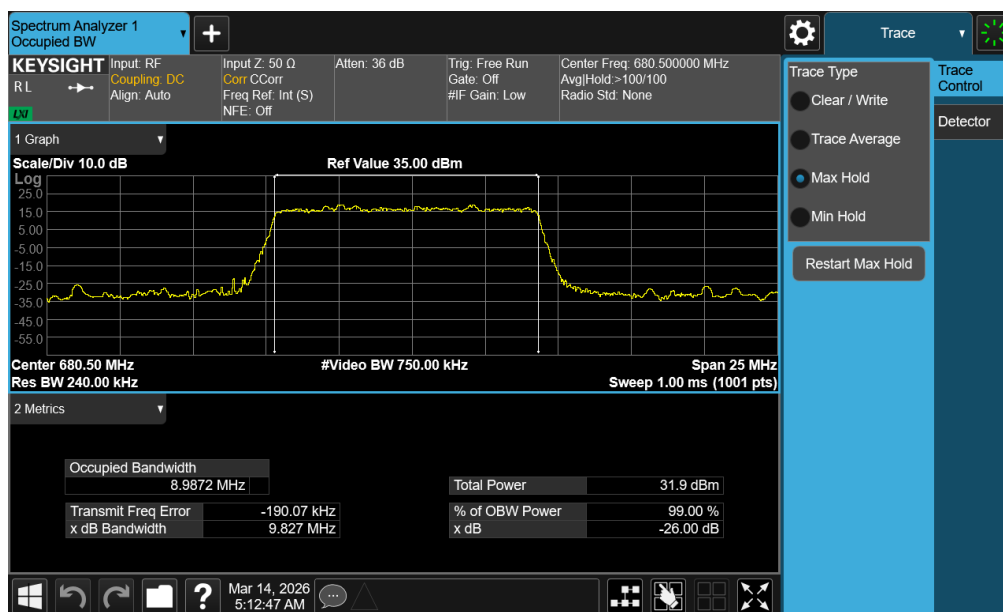


Plot 7-58. Occupied Bandwidth Plot (NR Band n71 - 10MHz DFT-s-OFDM BPSK - Full RB – ANT1)


FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 62 of 318

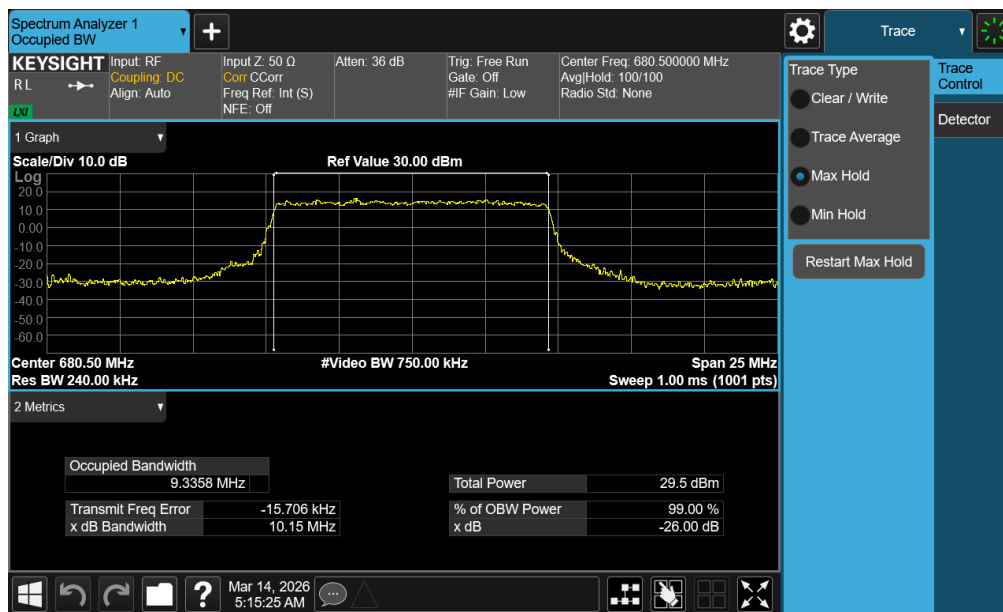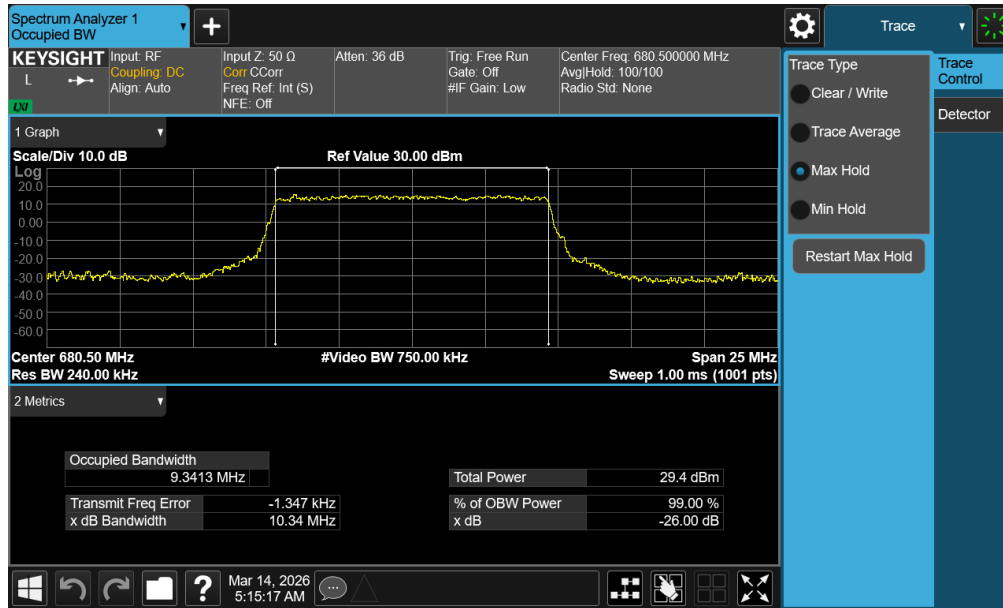

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 63 of 318

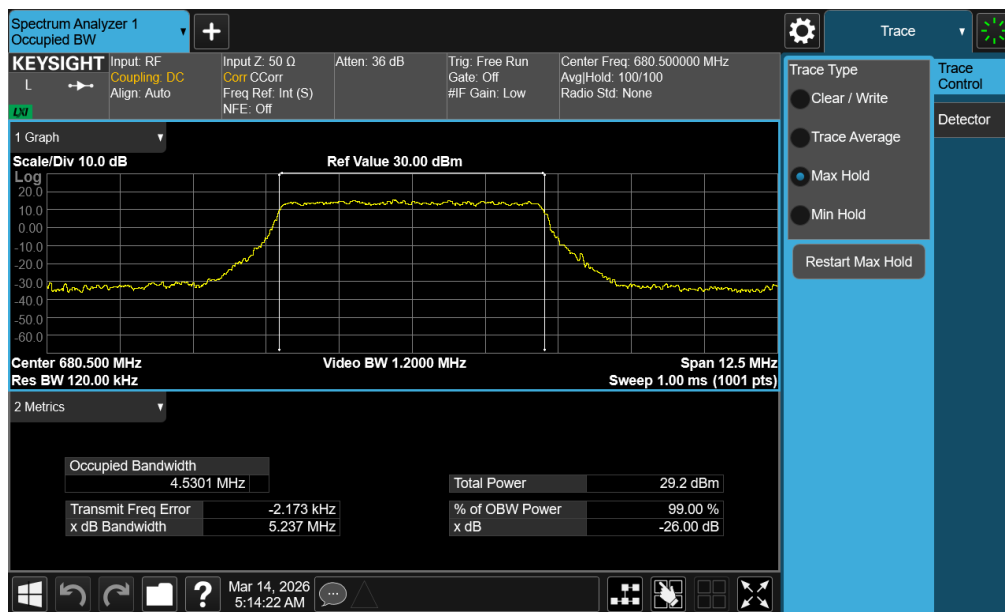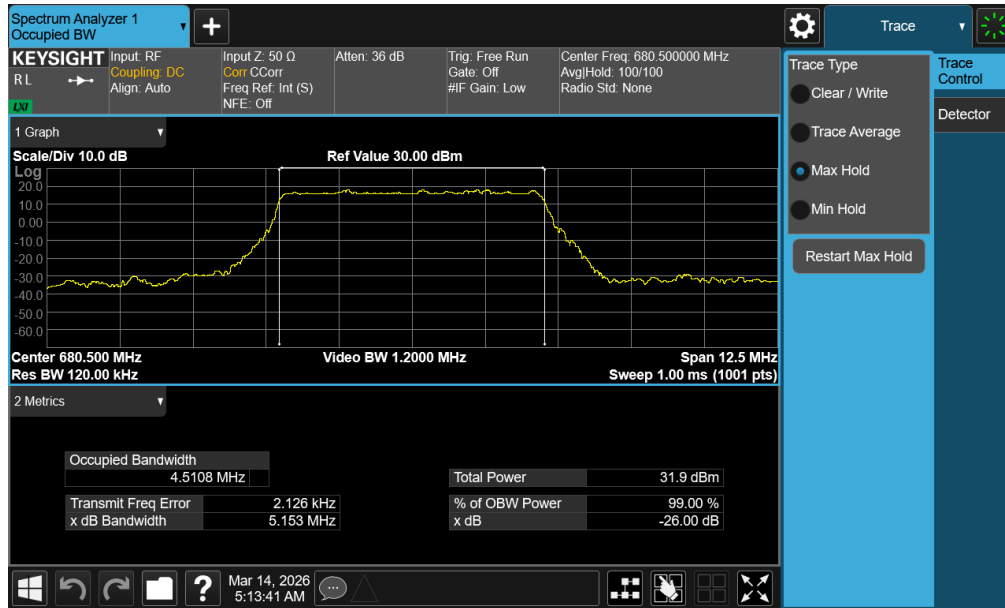



FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2-A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 64 of 318

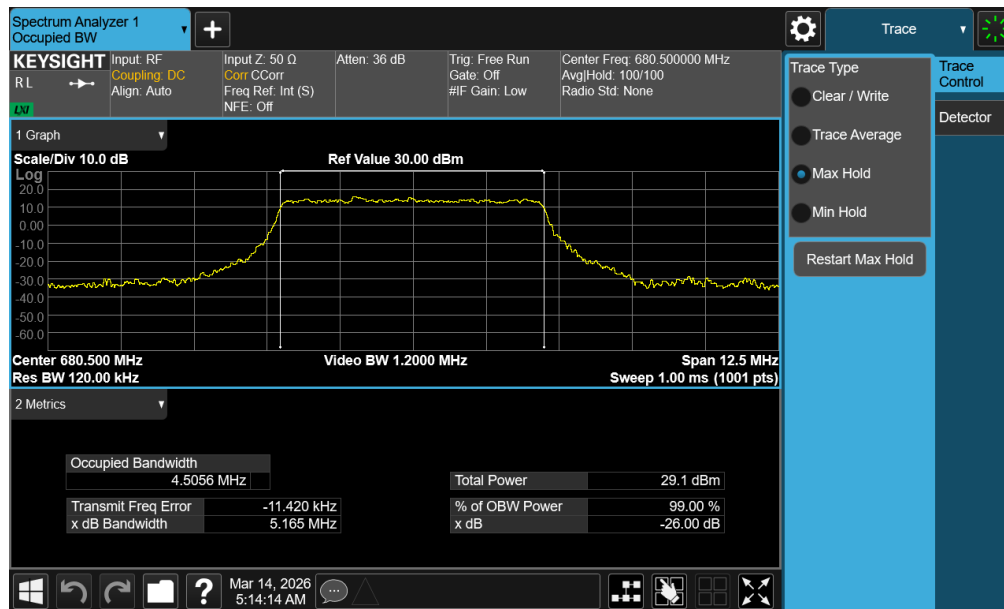



Plot 7-63. Occupied Bandwidth Plot (NR Band n71 - 5MHz CP-OFDM 16-QAM - Full RB – ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 65 of 318



NR Band n70 – ANT1

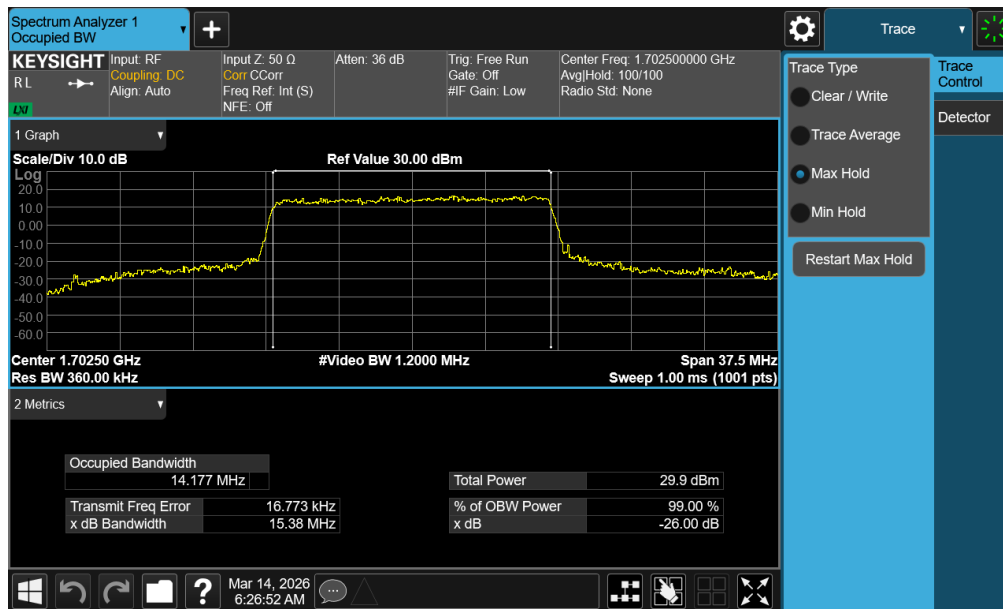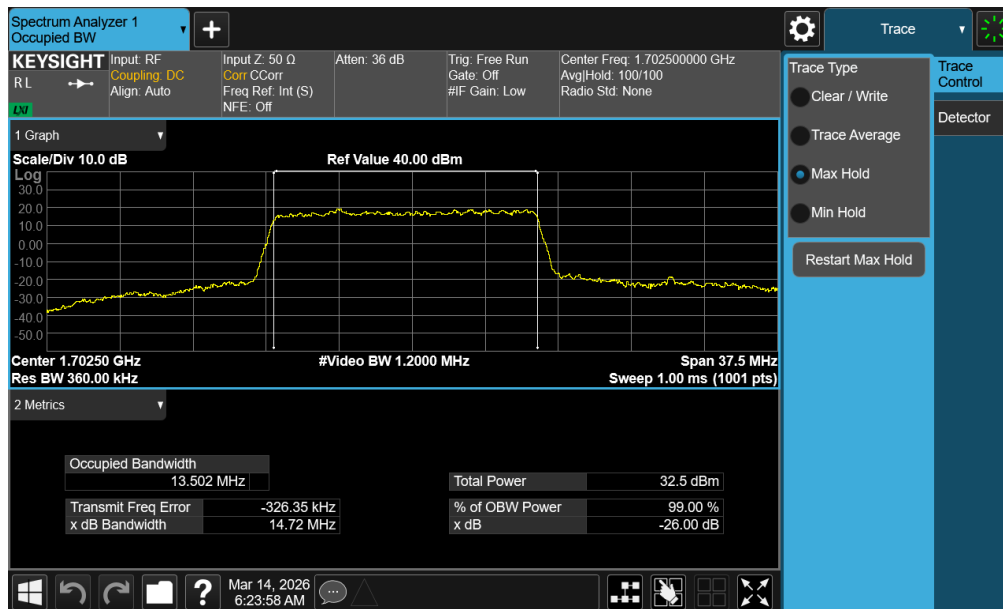



FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 66 of 318




© 2026 ELEMENT V11.1 08/28/2023
Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

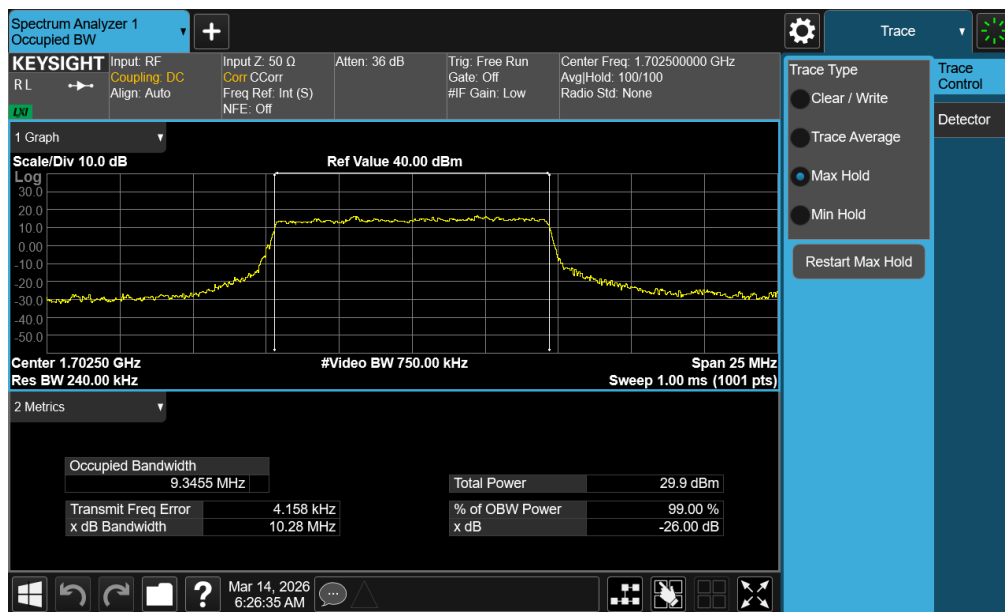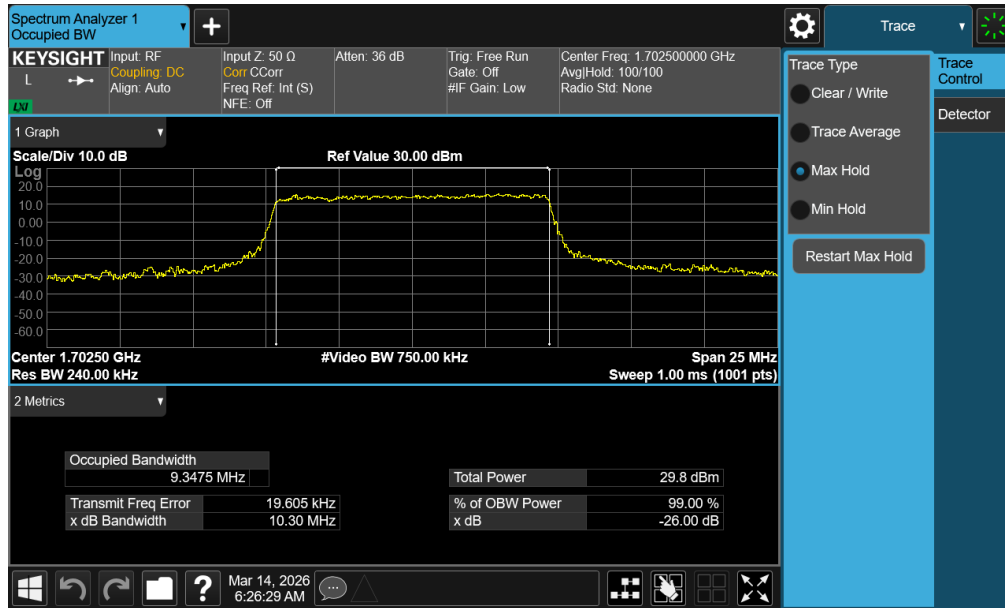

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 68 of 318

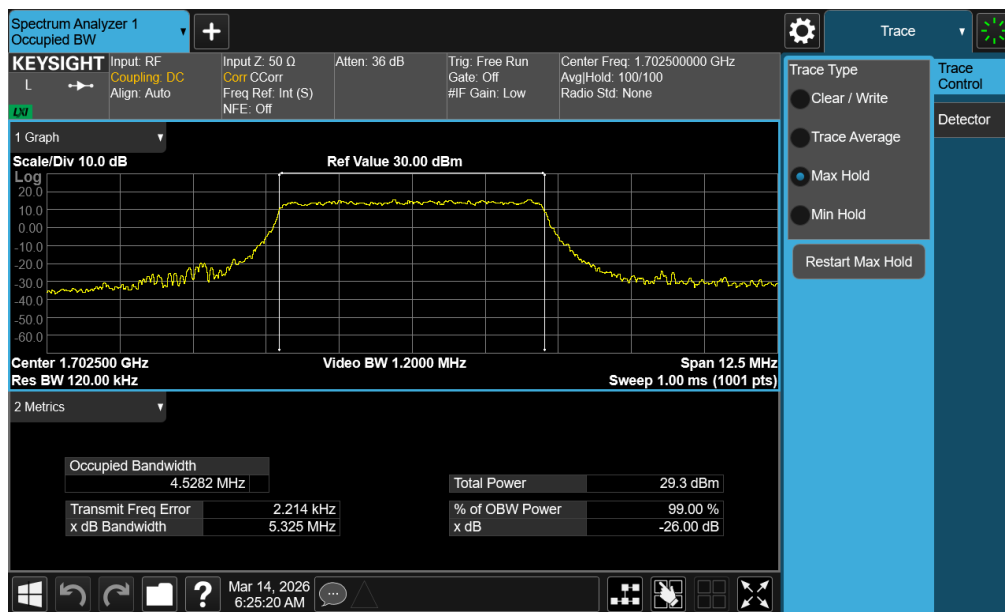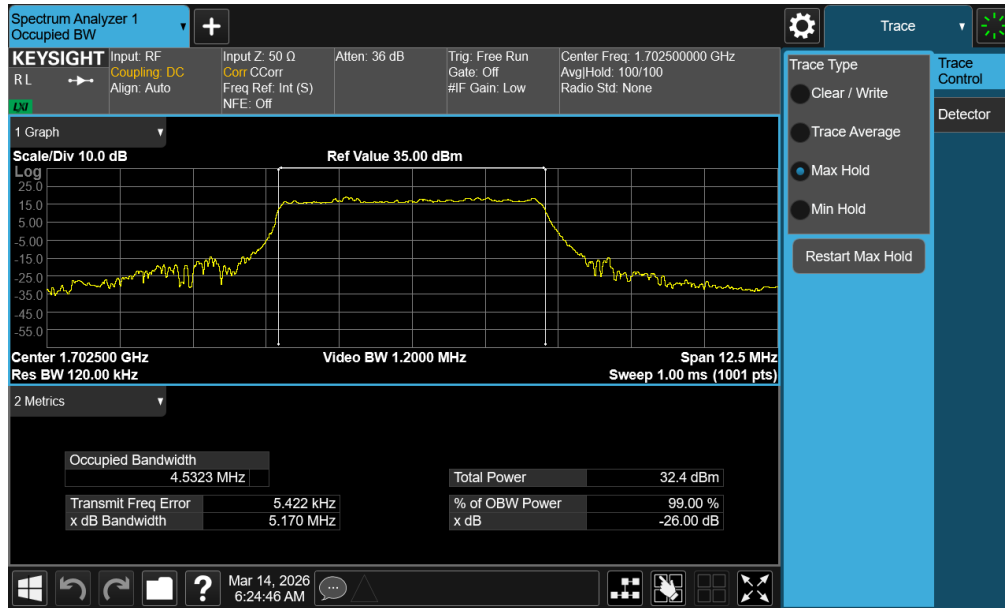


FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2-A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 69 of 318

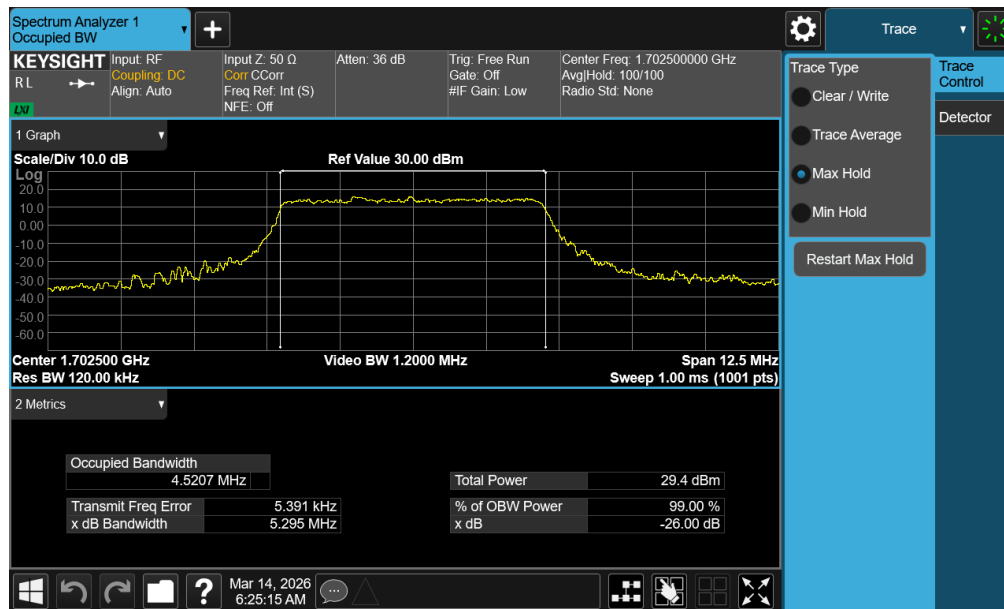


Plot 7-72. Occupied Bandwidth Plot (NR Band n70 - 5.0MHz CP-OFDM 16QAM - Full RB – ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L		This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.		Page 70 of 318

NR Band n66 – ANT1

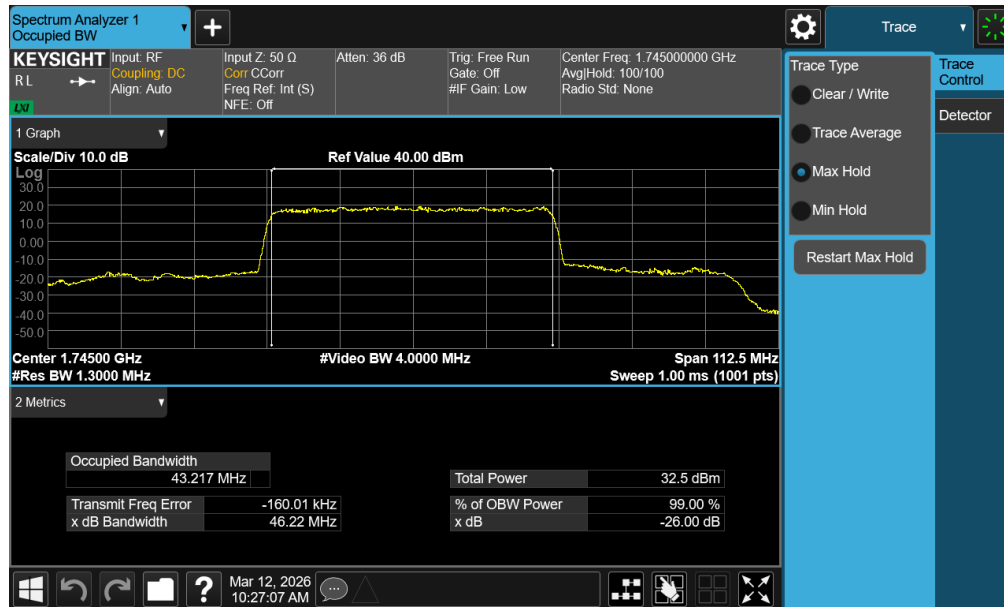

Plot 7-73. Occupied Bandwidth Plot (NR Band n66 - 45.0MHz DFT-s-OFDM BPSK - Full RB – ANT1)

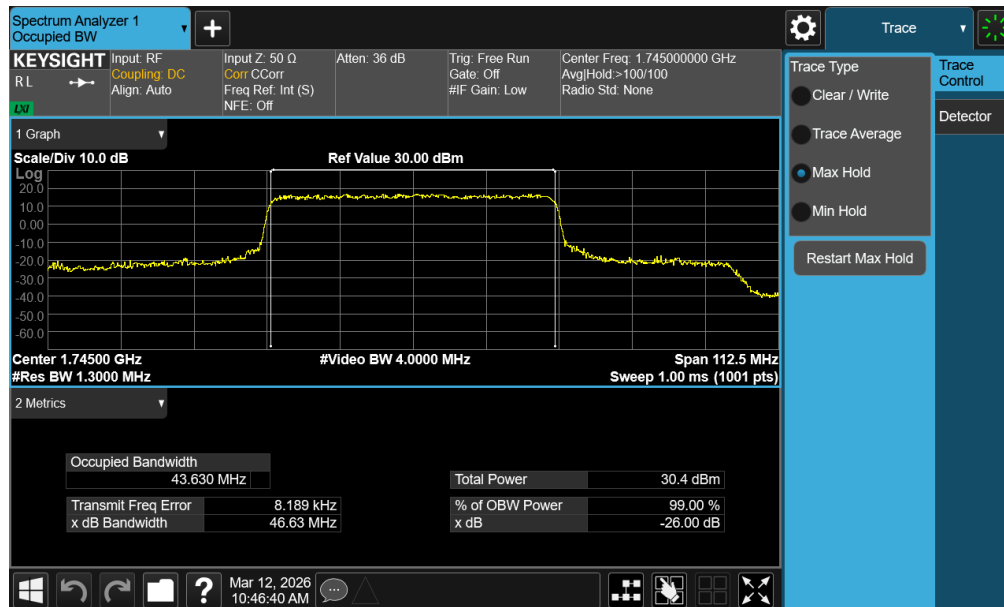

Plot 7-74. Occupied Bandwidth Plot (NR Band n66 - 45.0MHz CP-OFDM QPSK - Full RB – ANT1)

FCC ID: A3LSMF776U IC: 649E-SMF776W	PART 27 RSS-130 & RSS-139 MEASUREMENT REPORT	Test Dates: 2/24/2026 - 4/17/2026	EUT Type: Portable Handset	Approved by: Technical Manager
Test Report S/N: 1M2602190015-05-R2.A3L	 This report is Blockchain Verified. To verify the report authenticity, please visit HTTPS://WWW.BLOCKCHAIN-VERIFIED.COM or by clicking on the Blockchain logo.			Page 71 of 318